Annex B

Internal Photo

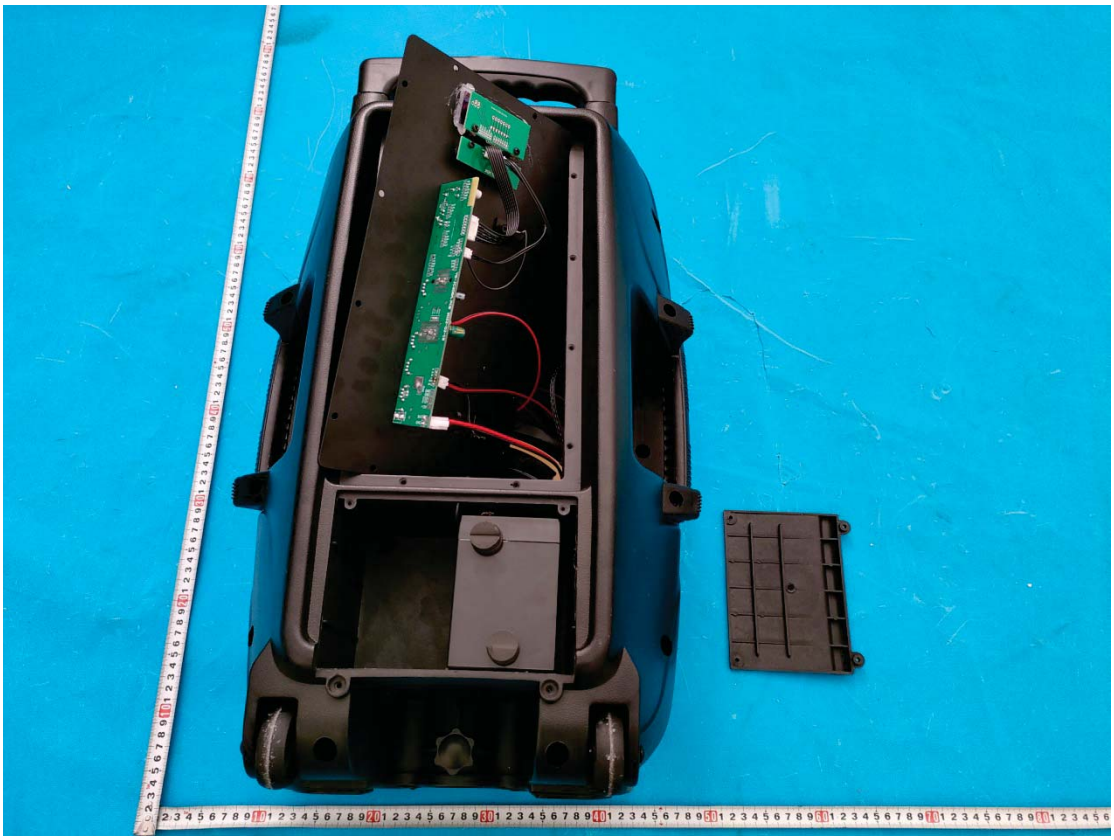

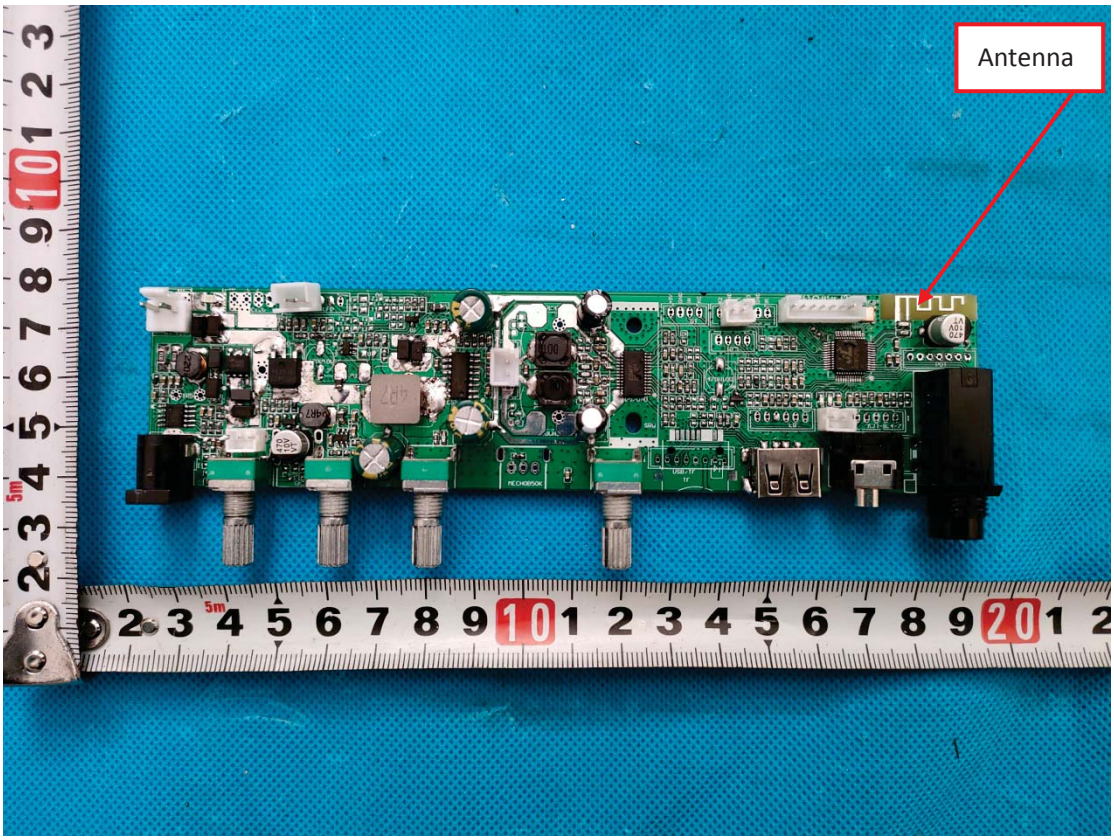

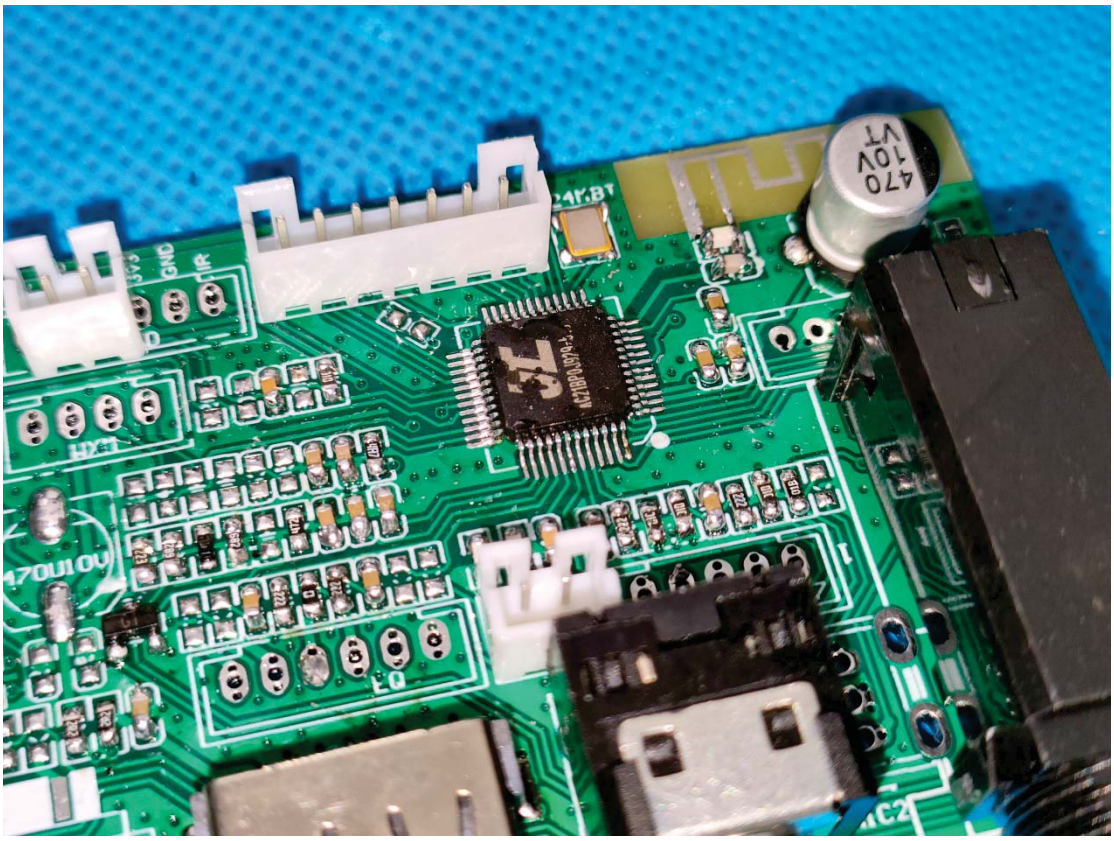
470
10V
VT
GND
IR
470U10V

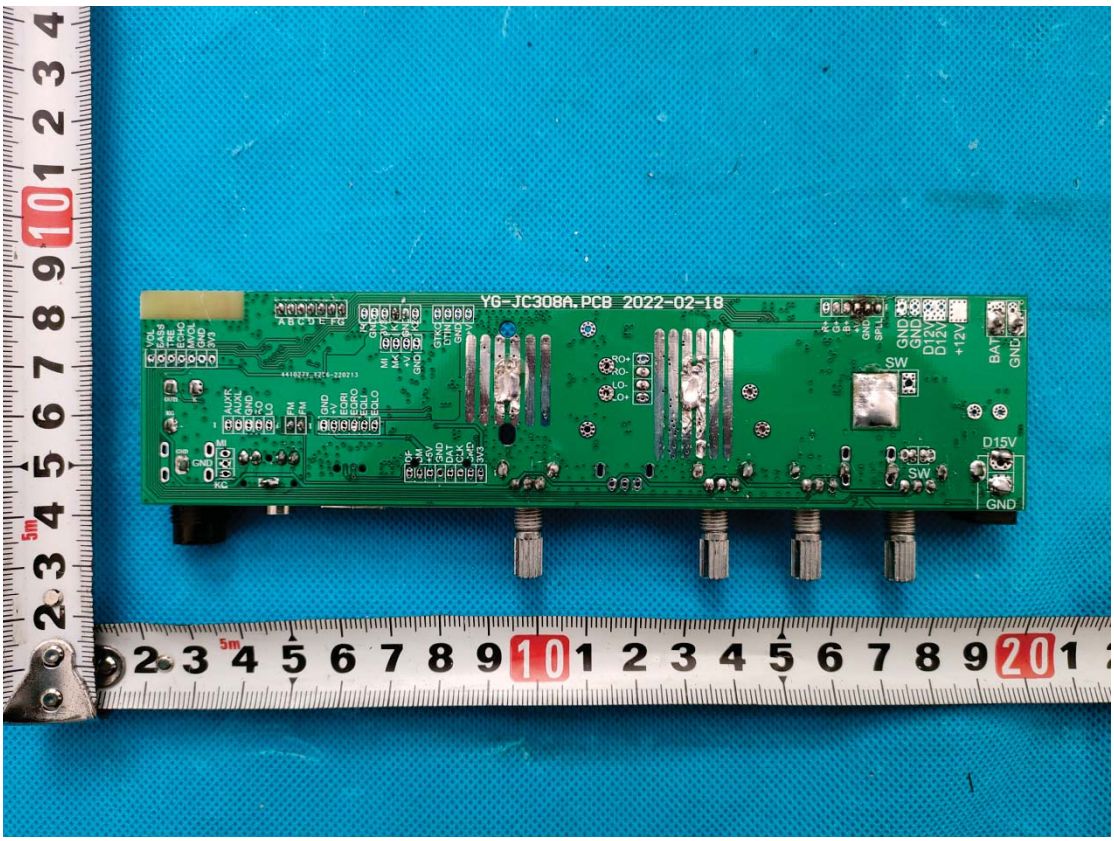
YG-JC308A.PCB 2022-02-18
SW
D15V
GND
BAT
D12V
+12V

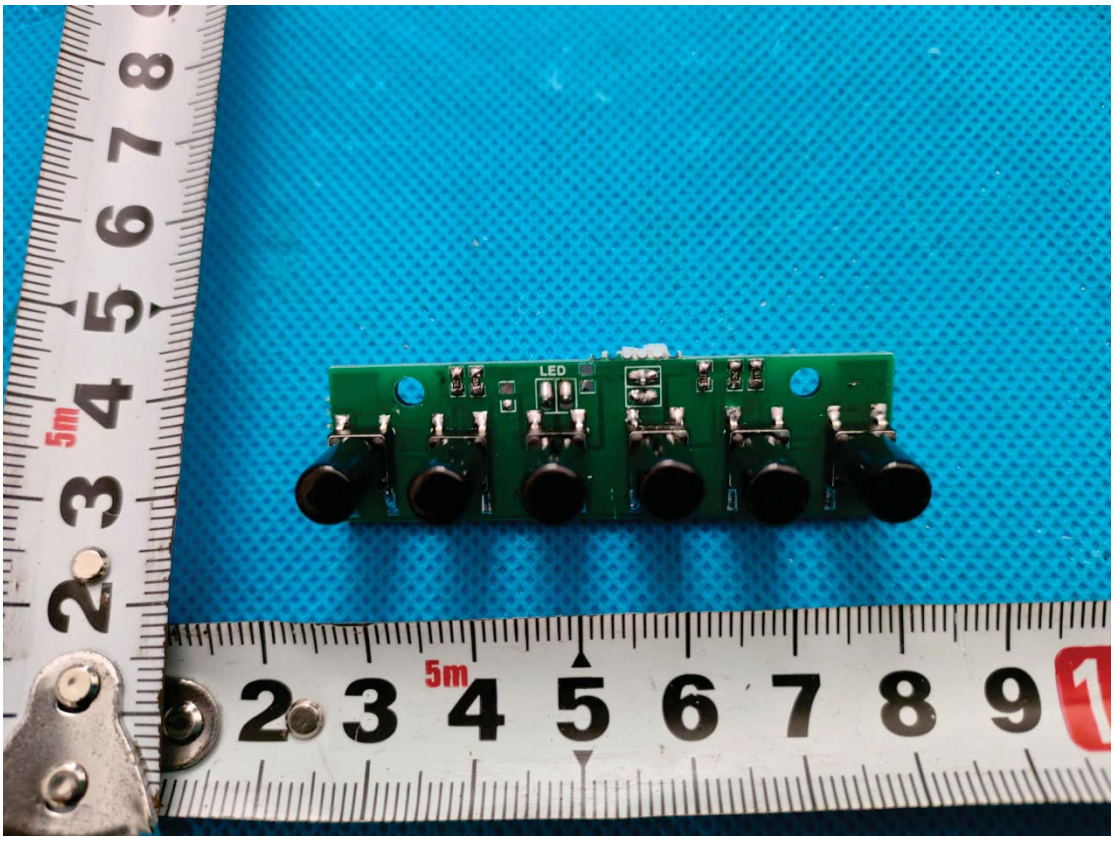
LED

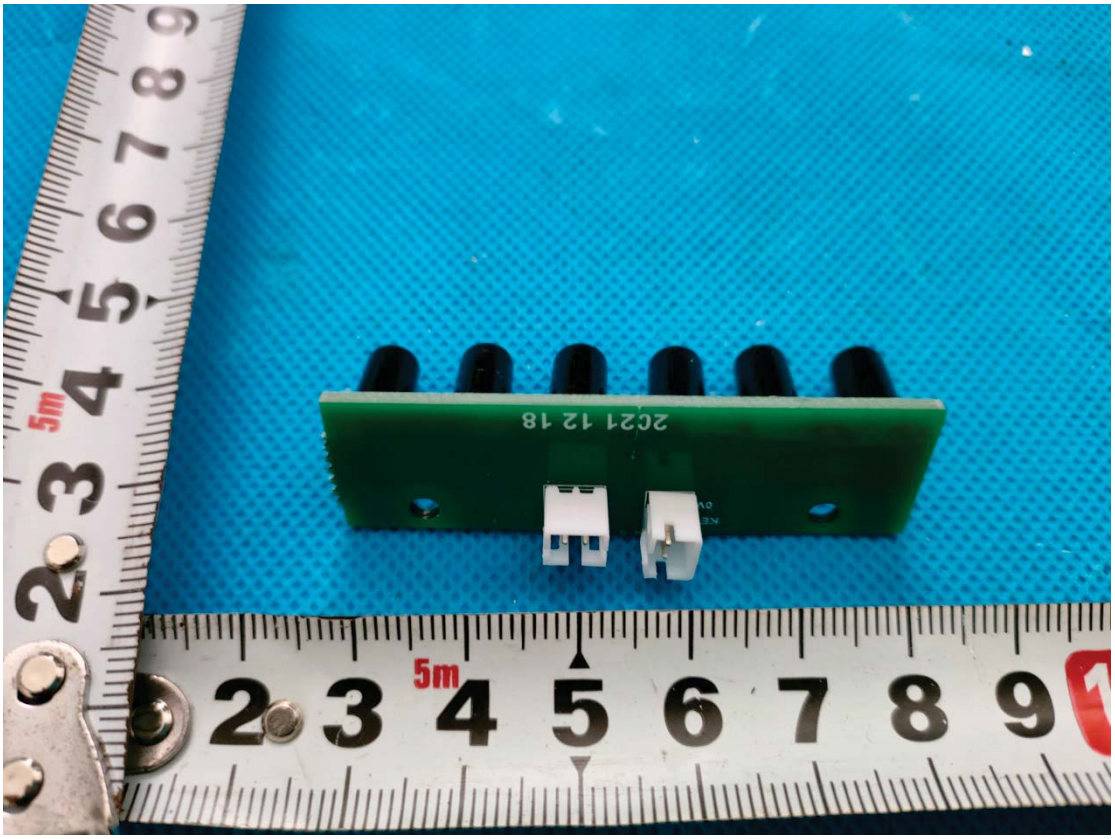
2021 12 18

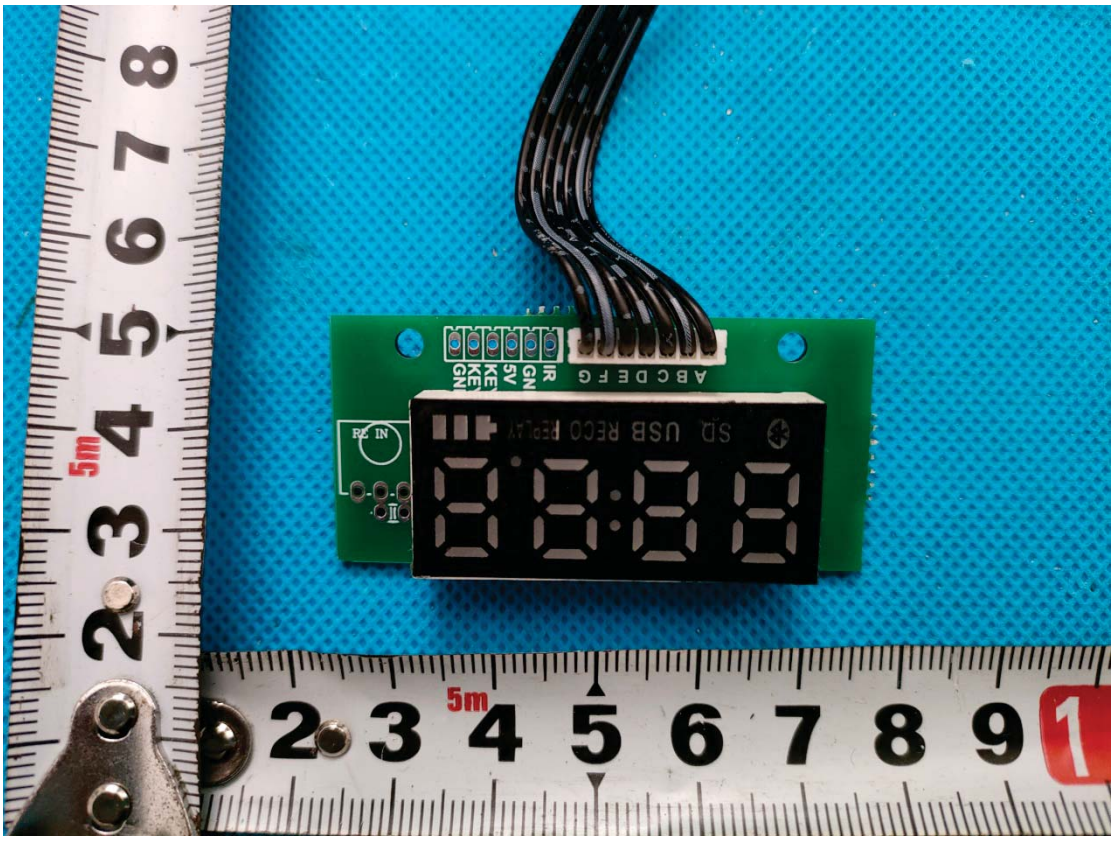
GND
KEY
5V
IR
A B C D E F G
SD USB RECO REPLAY
RL IN

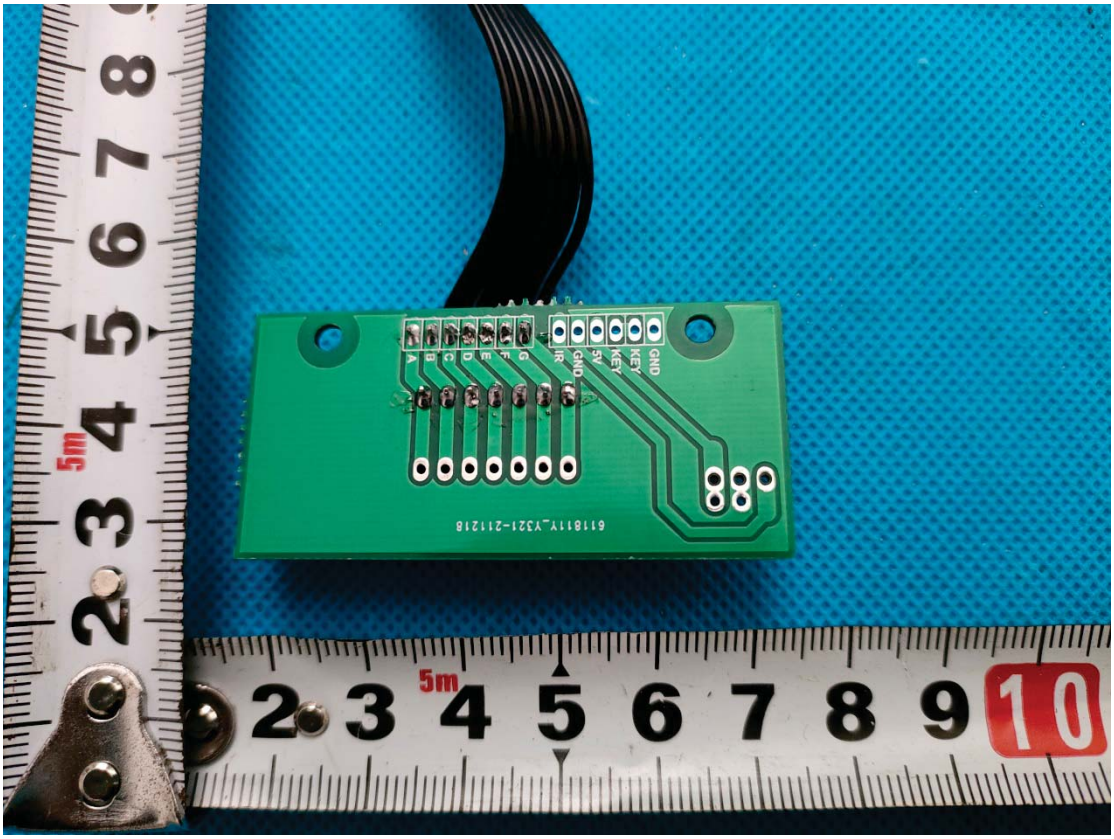
GND
KEY
5V
GND
IR
A B C D E F G
611811V_V321-211218

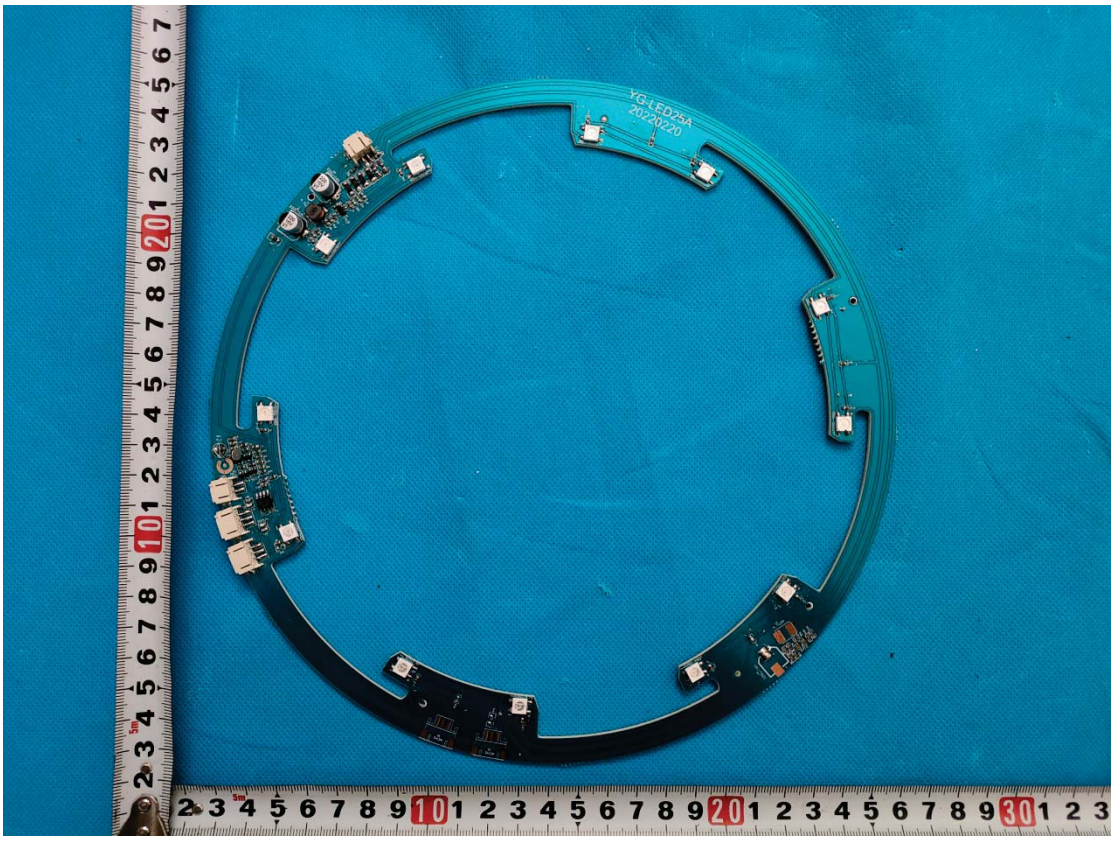
YG-LED25A
20220220

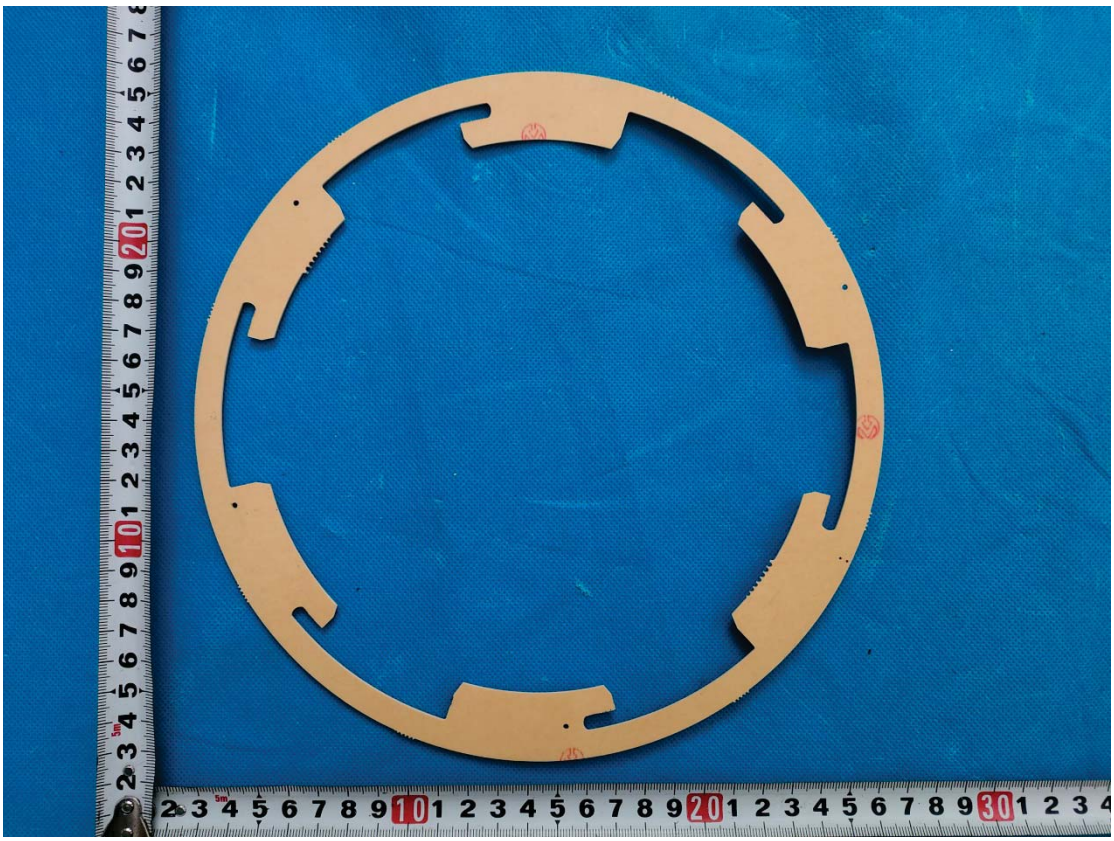

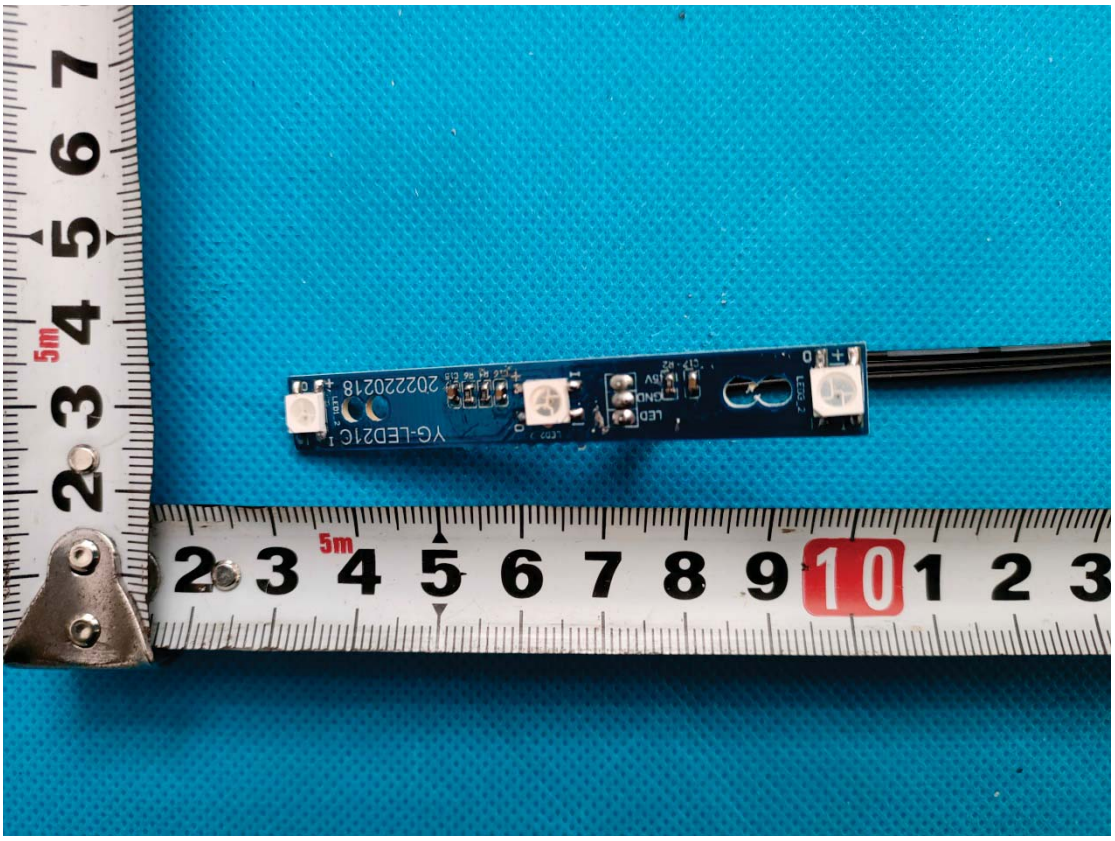
YG-LED21C
20222021 8

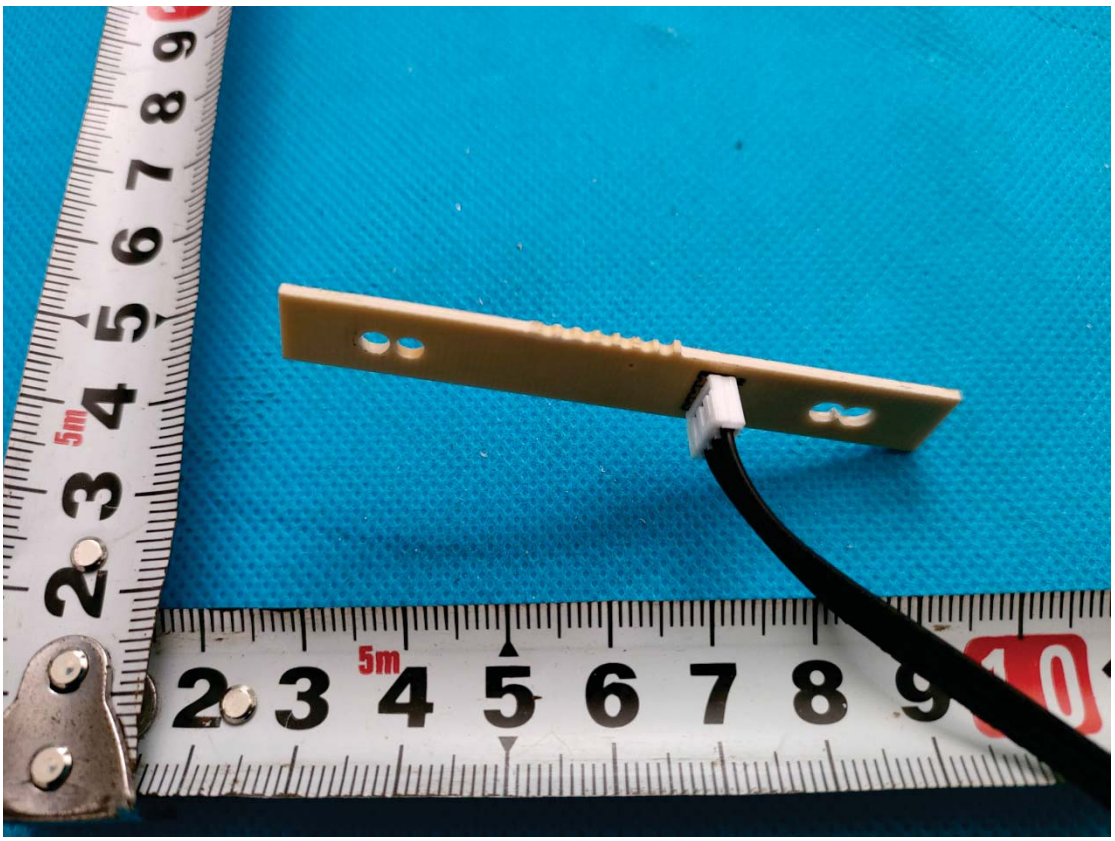

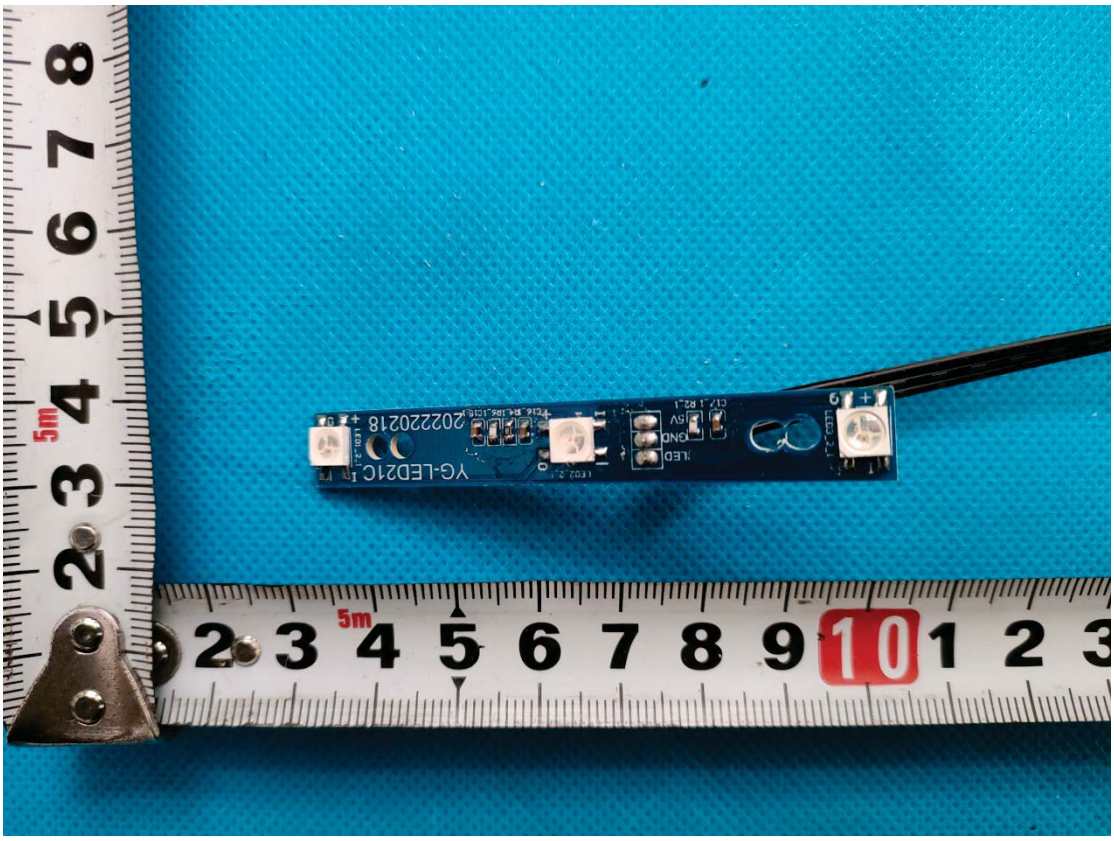
YG-LED21C
20222021 8
GND
5V
LED

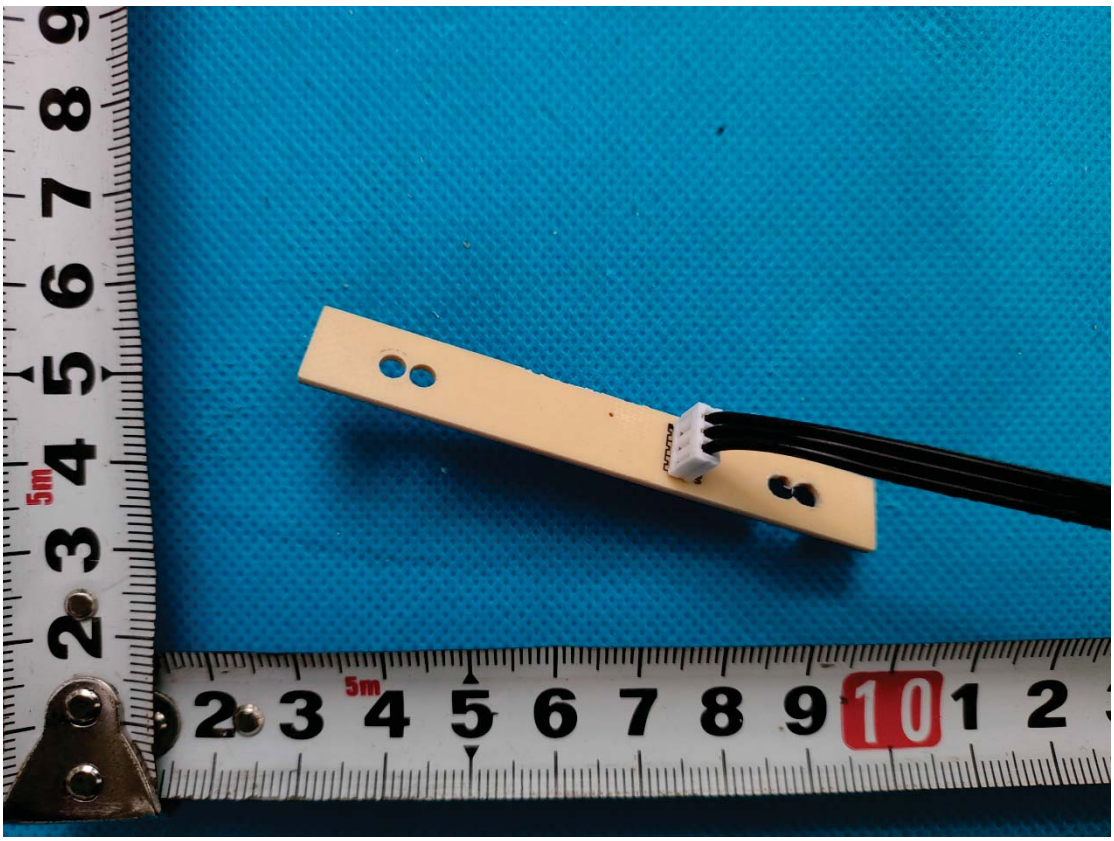

NP3-12 12V3Ah
Sealed Rechargeable Battery
Constant Voltage Charge
Cycle use
14.4-15.0V
Standby use
13.5-13.8V
Initial current
less than 0.90A
Do Not Short Circuit
SEALED LEAD BATTERY
MUST BE RECYCLED OR
DISPOSED OF PROPERLY
Pb.
Pb