



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20220601100E

Applicant: KERCHAN TECHNOLOGY CO.,LIMITED

Address of Applicant: 5/F, Buliding B, shuangjinhui Industrial Park, Fu'yong, Baoan Shenzhen China.

Equipment Under Test (EUT):

EUT Name: White Noise Machine with Alarm Clock.

Model No.: RS10, RS10V, RS10S, RS10B

Test Model No.: RS10

Brand Name: HOUSBAY

FCC ID: 2AWVR-RS10

Standards: 47 CFR Part 15, Subpart B, Class B

Date of Receipt: 2022-6-29

Date of Test: 2022-6-29 to 2022-7-5

Date of Issue: 2022-7-13

Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

(Timo Lei)

R. D. B.
Reviewed By:

(*K Liao*)

Approved By: *James*

(Jack Ai)



The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

Version

Revision History of Report

Report No.	Version	Description	Issue Date
CQASZ20220601100E	Rev.01	Initial report	2022-7-13

1 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15B	ANSI C63.4-2014	PASS
Conducted Emission (150kHz to 30MHz)	47 CFR Part 15B	ANSI C63.4-2014	PASS

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

2 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	5
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST LOCATION	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	6
5 EQUIPMENT LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 CONDUCTED EMISSIONS	8
6.2 RADIATED EMISSION	12
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	16
APPENDIX 2 PHOTOGRAPHS OF EUT	17

3 General Information

3.1 Client Information

Applicant:	KERCHAN TECHNOLOGY CO.,LIMITED
Address of Applicant:	5/F, Buliding B, shuangjinhui Industrial Park, Fu'yong, Baoan Shenzhen China.
Manufacturer:	KERCHAN TECHNOLOGY CO.,LIMITED
Address of Manufacturer:	5/F, Buliding B, shuangjinhui Industrial Park, Fu'yong, Baoan Shenzhen China.
Factory:	Shenzhen Kerchan Technology Co., Limited
Address of Factory:	5/F, Buliding B, shuangjinhui Industrial Park, Fu'yong, Baoan Shenzhen China.

3.2 General Description of EUT

Product Name:	White Noise Machine with Alarm Clock.
Model No.:	RS10, RS10V, RS10S, RS10B
Test Model No.:	RS10
Trade Mark:	HOUSBAY
EUT Power Supply:	Input: 100-240V Power: DC 5V/1A
Test Mode:	
Normal working	Keep the EUT in Normal working

3.3 Test Environment and Mode

Operating Environment:	
Radiated Emission	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emission	
Temperature:	25.5 °C
Humidity:	55% RH
Atmospheric Pressure:	1009 mbar

Note:

Model No.: RS10, RS10V, RS10S, RS10B

Only the model RS10 was tested, their electrical circuit design, layout, components used and internal wiring are identical, only the color of the product is different, so the model name is also different.

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

3.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Conduction emission	3.74dB (9kHz to 150kHz)
		3.34dB (150kHz to 30MHz)
2	Radiated emission	5.12dB (Below 1GHz)
		4.60dB (Above 1GHz)
3	Temperature	0.8°C
4	Humidity	2.0%

4 Equipment List

Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
EMI Test Receiver	R&S	ESPI3	CQA-013	2021/9/10	2022/9/9
LISN	R&S	ENV216	CQA-003	2021/9/10	2022/9/9
Coaxial cable (9kHz~300MHz)	CQA	N/A	C021	2021/9/10	2022/9/9

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
Loop antenna	SCHWARZBECK	FMZB 1516	CQA-060	2021/9/11	2024/10/10
Horn Antenna	R&S	BBHA 9170	CQA-088	2021/9/10	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/10	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/10	2024/9/15
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/16	2022/9/9
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/16	2022/9/9
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/10	2022/9/9
Coaxial cable (1GHz~40GHz)	CQA	N/A	C007	2021/9/10	2022/9/9
Coaxial cable (9kHz~1GHz)	CQA	N/A	C013	2021/9/10	2022/9/9

5 Test results and Measurement Data

5.1 Conducted Emissions

Test Requirement: 47 CFR Part 15B

Test Method: ANSI C63.4

Test frequency range: 150kHz to 30MHz

Limit:


Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

Test Setup:

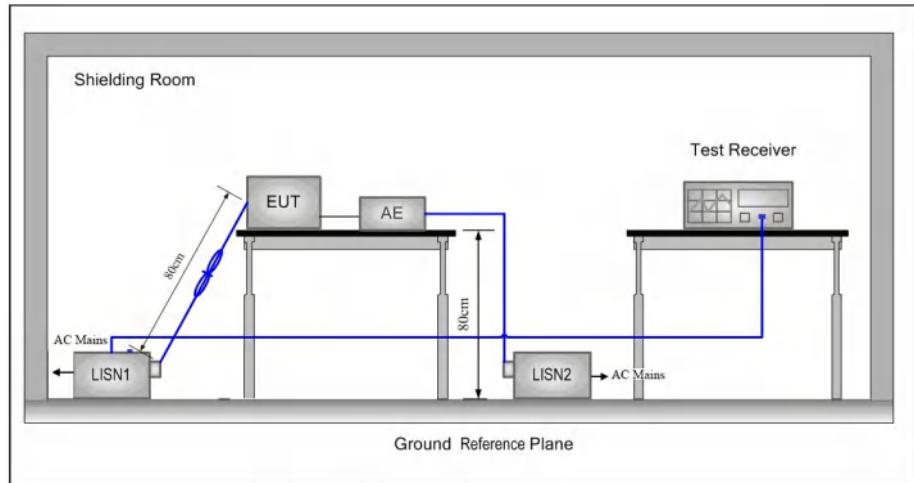

Instruments Used:

Refer to section 5 for details

Test Mode:

Normal working

Test Results:


Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

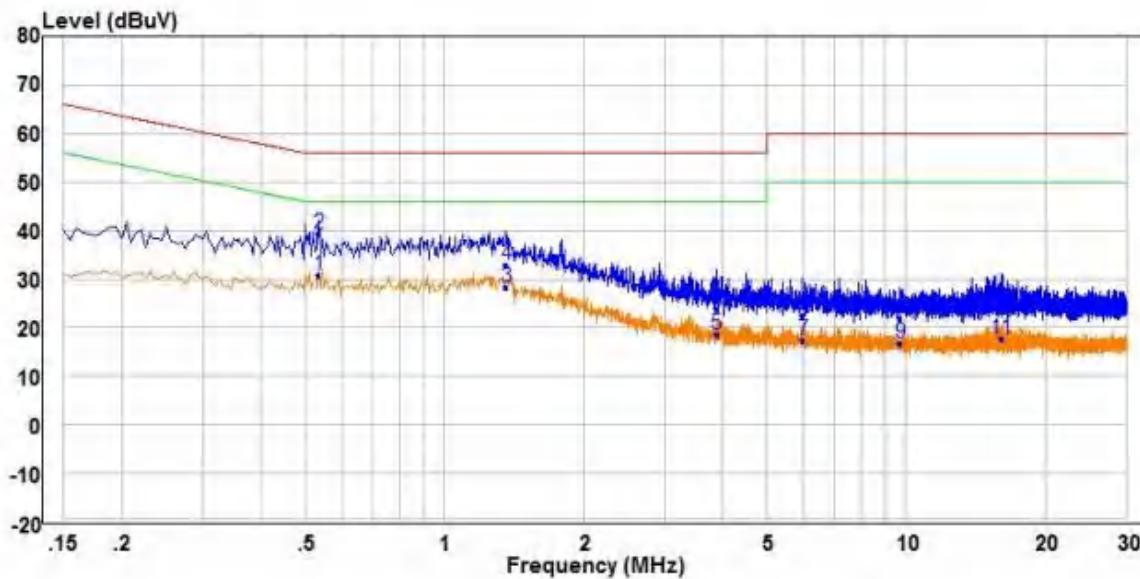

Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	Freq	Level					
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 PP	0.535	21.20	9.59	30.79	46.00	-15.21	Average Line
2 QP	0.535	29.71	9.59	39.30	56.00	-16.70	QP Line
3	1.360	18.67	9.53	28.20	46.00	-17.80	Average Line
4	1.360	23.39	9.53	32.92	56.00	-23.08	QP Line
5	3.885	8.83	9.66	18.49	46.00	-27.51	Average Line
6	3.885	14.21	9.66	23.87	56.00	-32.13	QP Line
7	5.965	7.68	9.72	17.40	50.00	-32.60	Average Line
8	5.965	12.80	9.72	22.52	60.00	-37.48	QP Line
9	9.710	6.95	9.80	16.75	50.00	-33.25	Average Line
10	9.710	12.06	9.80	21.86	60.00	-38.14	QP Line
11	16.045	7.78	9.93	17.71	50.00	-32.29	Average Line
12	16.045	13.79	9.93	23.72	60.00	-36.28	QP Line

Neutral Line:

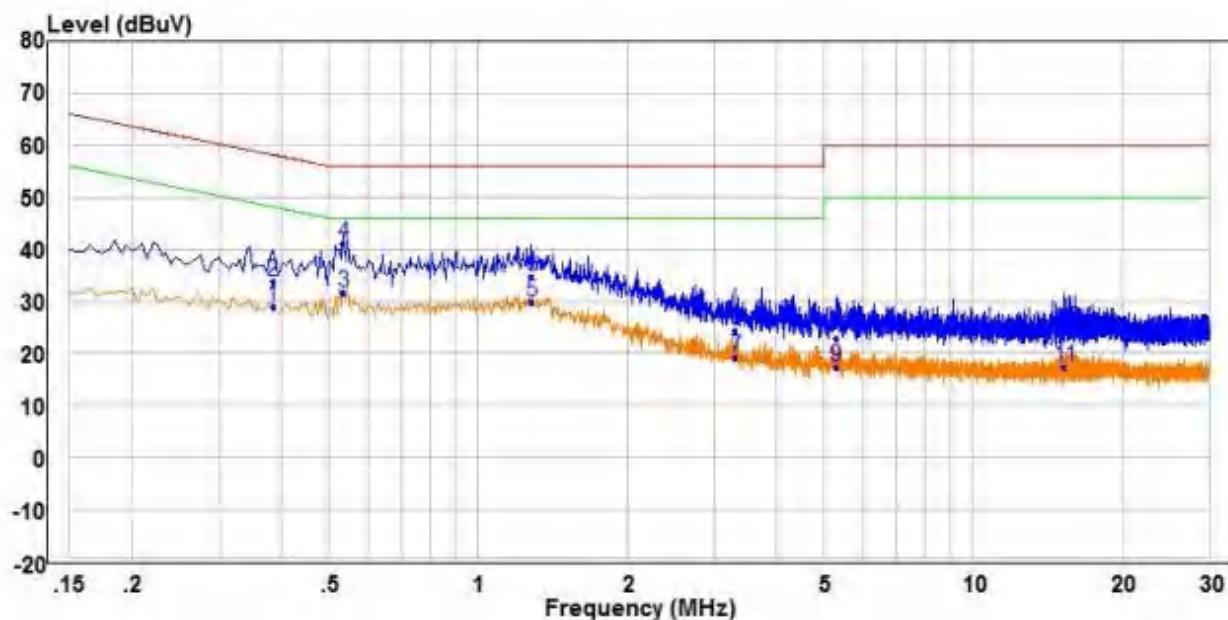

Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	Freq	Level					
	MHz						
1	0.385	19.41	9.59	29.00	48.17	-19.17	Average
2	0.385	24.26	9.59	33.85	58.17	-24.32	QP
3 PP	0.535	21.93	9.74	31.67	46.00	-14.33	Average
4 QP	0.535	31.50	9.74	41.24	56.00	-14.76	QP
5	1.285	20.19	9.71	29.90	46.00	-16.10	Average
6	1.285	25.11	9.71	34.82	56.00	-21.18	QP
7	3.310	9.52	9.78	19.30	46.00	-26.70	Average
8	3.310	14.72	9.78	24.50	56.00	-31.50	QP
9	5.295	7.62	9.82	17.44	50.00	-32.56	Average
10	5.295	13.10	9.82	22.92	60.00	-37.08	QP
11	15.335	7.69	9.74	17.43	50.00	-32.57	Average
12	15.335	15.02	9.74	24.76	60.00	-35.24	QP

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

5.2 Radiated Emission

Test Requirement: 47 CFR Part 15B

Test Method: ANSI C63.4

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
Receiver setup:	Frequency			Limit (dB μ V/m @3m)	
	30MHz-88MHz			40.0	
	88MHz-216MHz			43.5	
	216MHz-960MHz			46.0	
	960MHz-1GHz			54.0	

Test Procedure:

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber (Above 18GHz the distance is 1 meter).
- h. Repeat above procedures until all frequencies measured was complete.

Test Setup:

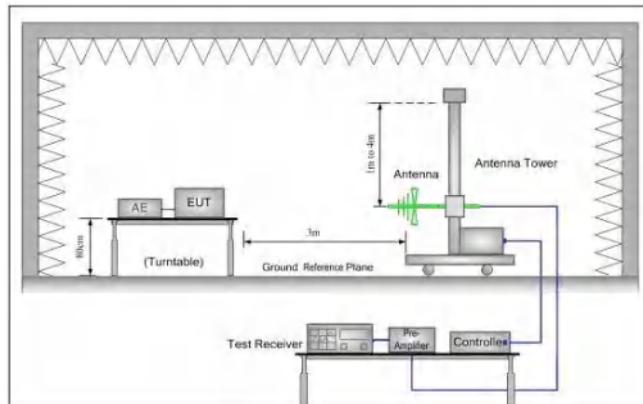


Figure 1. 30MHz to 1GHz

Instruments Used:

Refer to section 5 for details

Test Mode:


Normal working

Test Results:

Pass


Below 1GHz

Horizontal

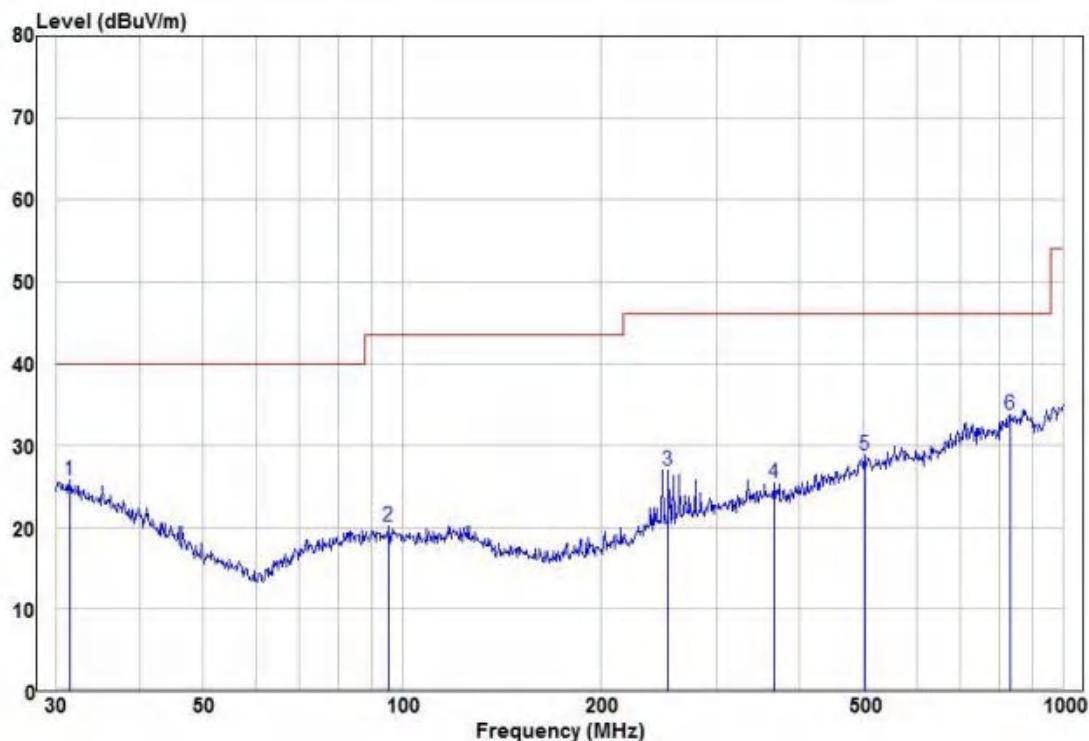

Freq	Read		Limit		Over Line Limit	Over Remark	Pol/Phase
	Level	Factor	Level	Line			
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	31.40	10.16	15.55	25.71	40.00	-14.29	Peak HORIZONTAL
2	95.43	9.75	10.37	20.12	43.50	-23.38	Peak HORIZONTAL
3	252.95	14.73	12.18	26.91	46.00	-19.09	Peak HORIZONTAL
4	365.54	10.15	15.33	25.48	46.00	-20.52	Peak HORIZONTAL
5	501.18	10.56	18.29	28.85	46.00	-17.15	Peak HORIZONTAL
6 pp	833.32	9.87	23.97	33.84	46.00	-12.16	Peak HORIZONTAL


Vertical

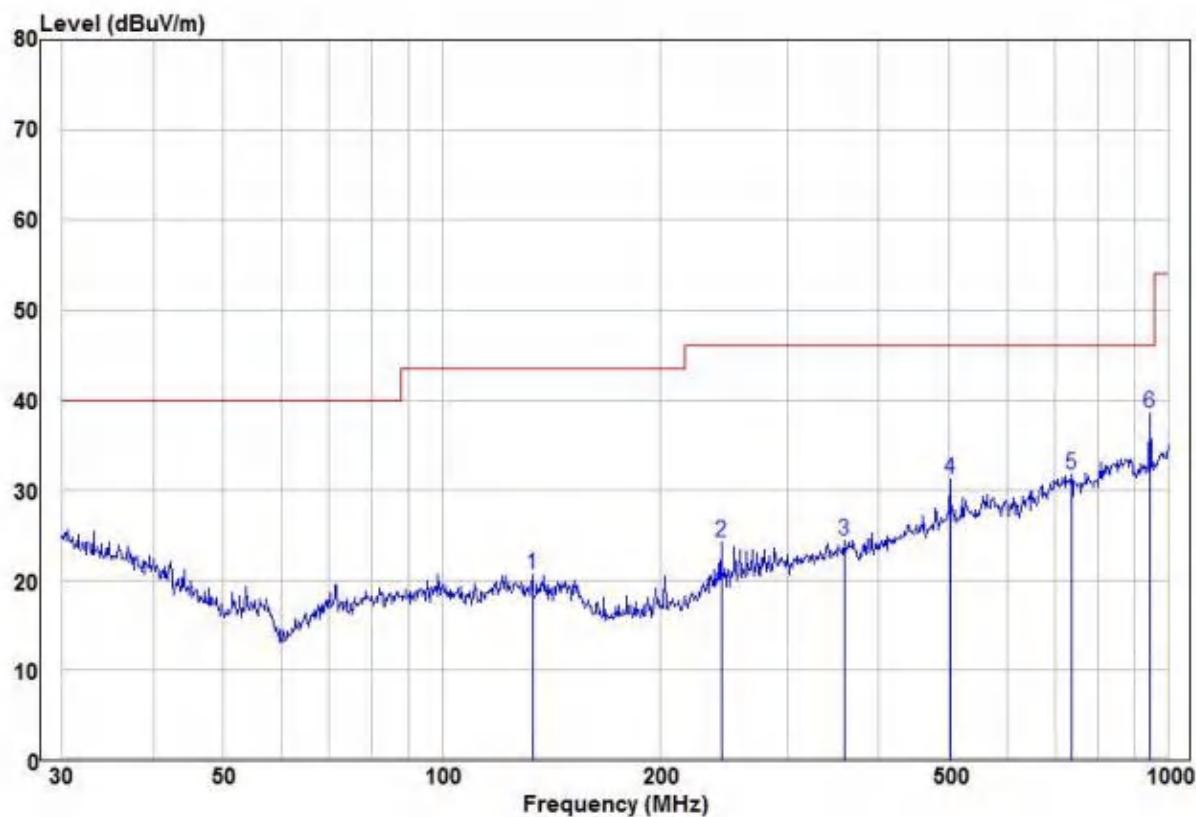

Freq	Read		Limit	Over	Over	Pol/Phase		
	MHz	dBuV	dB/m	dBuV/m	Line	Limit	Remark	Pol/Phase
1	133.15	11.07	9.61	20.68	43.50	-22.82	Peak	VERTICAL
2	242.53	12.57	11.74	24.31	46.00	-21.69	Peak	VERTICAL
3	357.93	9.18	15.14	24.32	46.00	-21.68	Peak	VERTICAL
4	501.18	12.99	18.29	31.28	46.00	-14.72	Peak	VERTICAL
5	737.07	10.46	21.33	31.79	46.00	-14.21	Peak	VERTICAL
6 pp	945.44	14.91	23.62	38.53	46.00	-7.47	Peak	VERTICAL

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Radiated emission Test Setup (30MHz~1GHz)

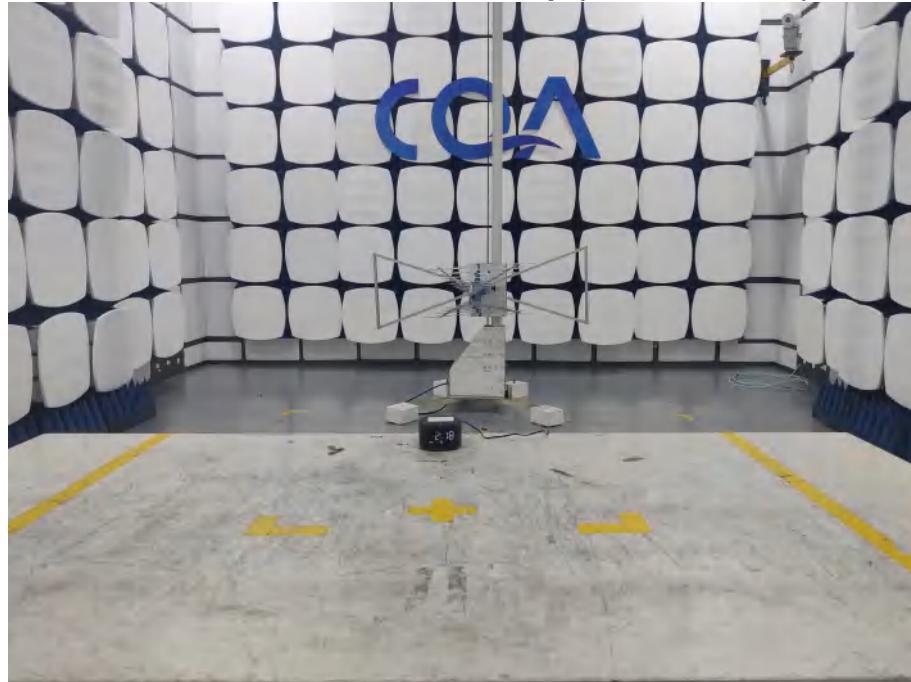



Conducted Emissions Test Setup






APPENDIX 2 PHOTOGRAPHS OF EUT





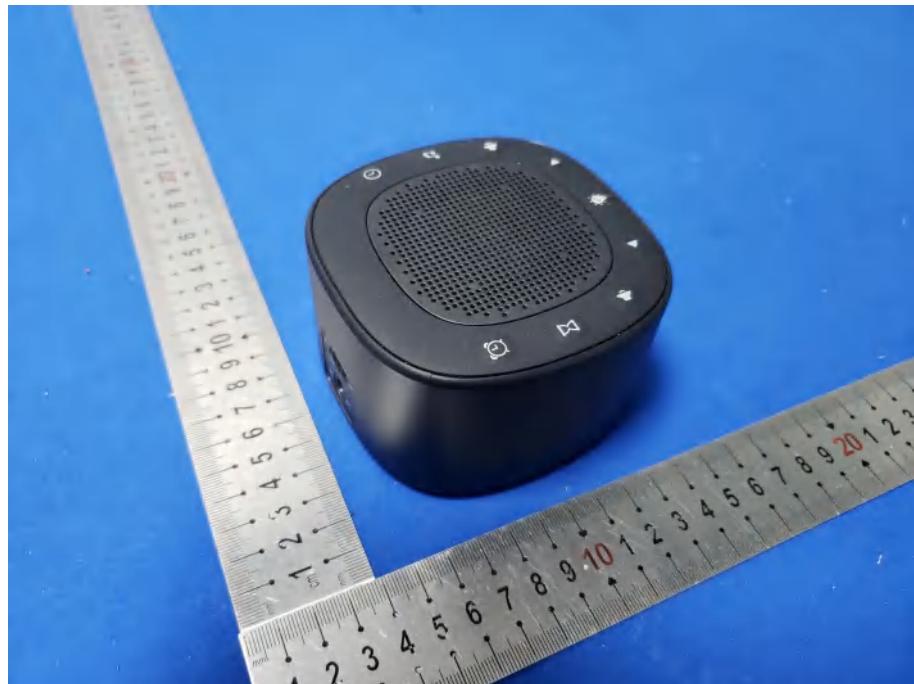

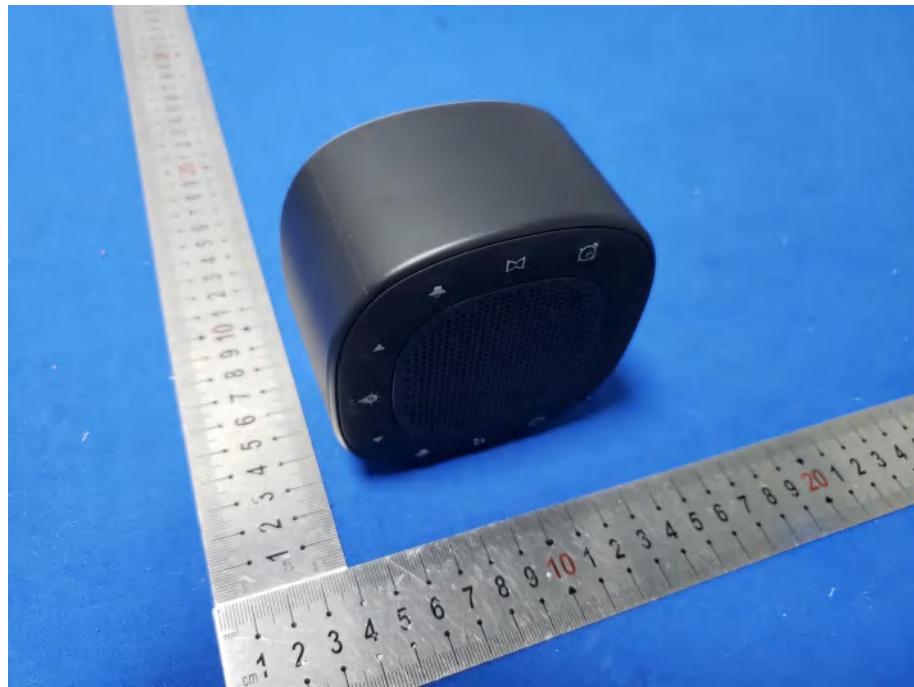

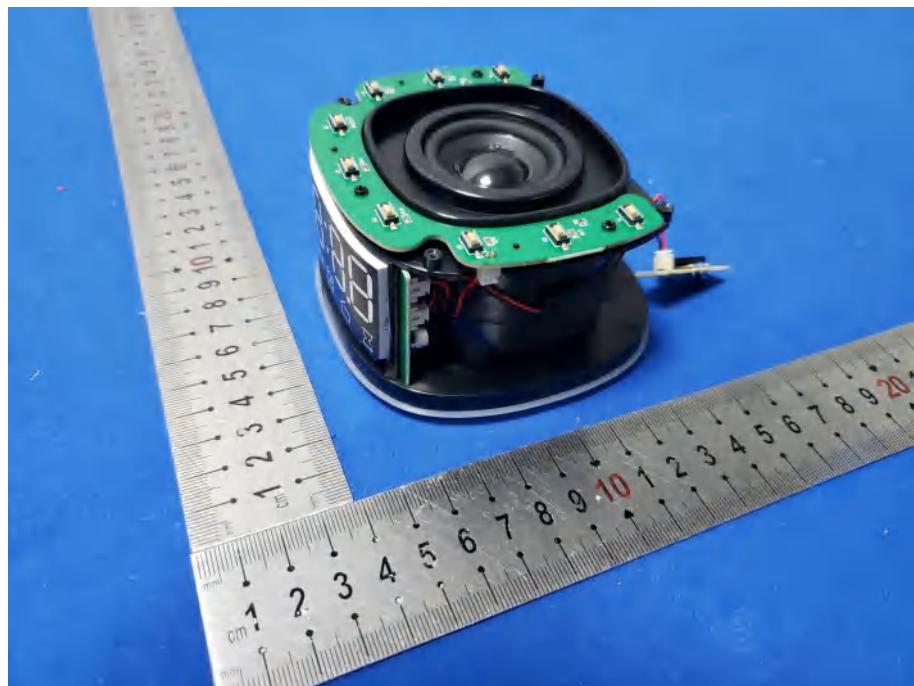

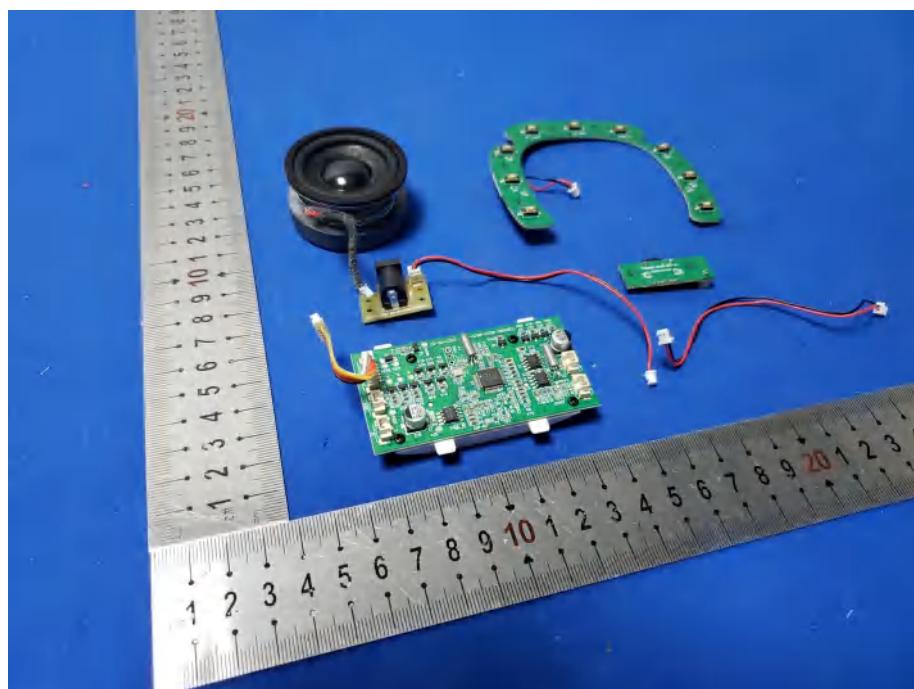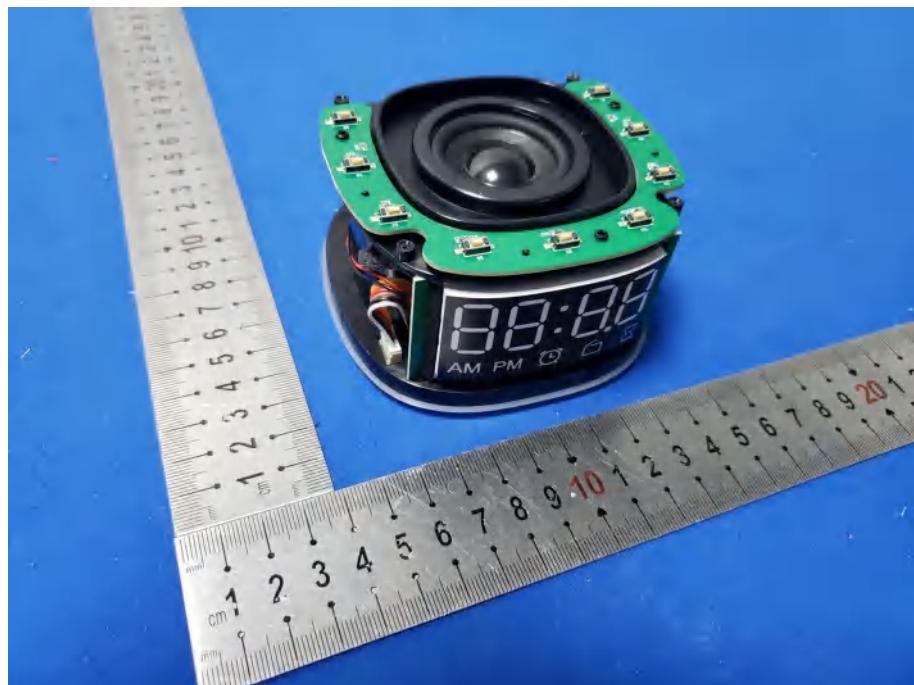

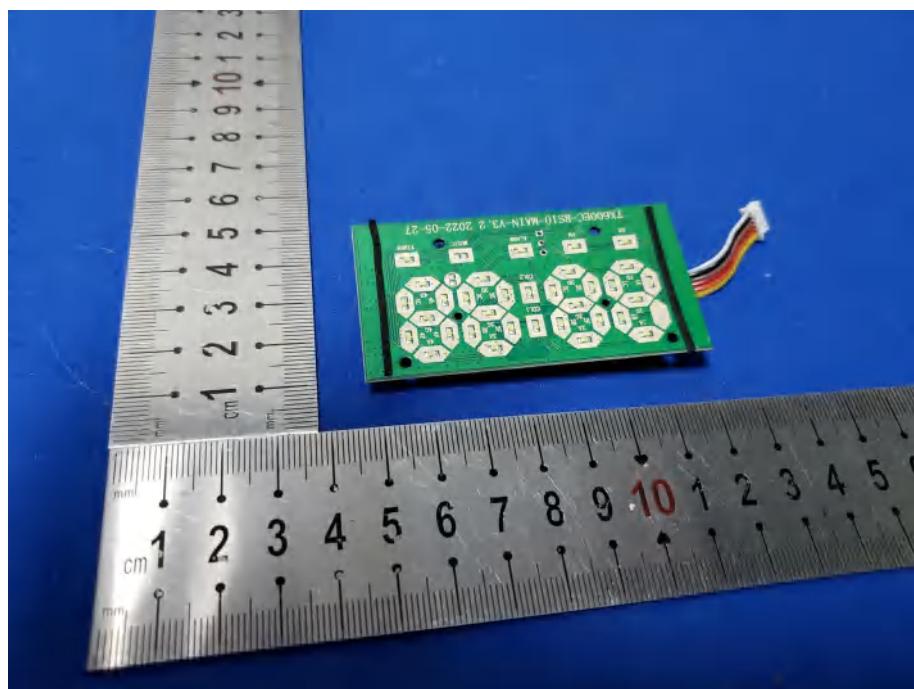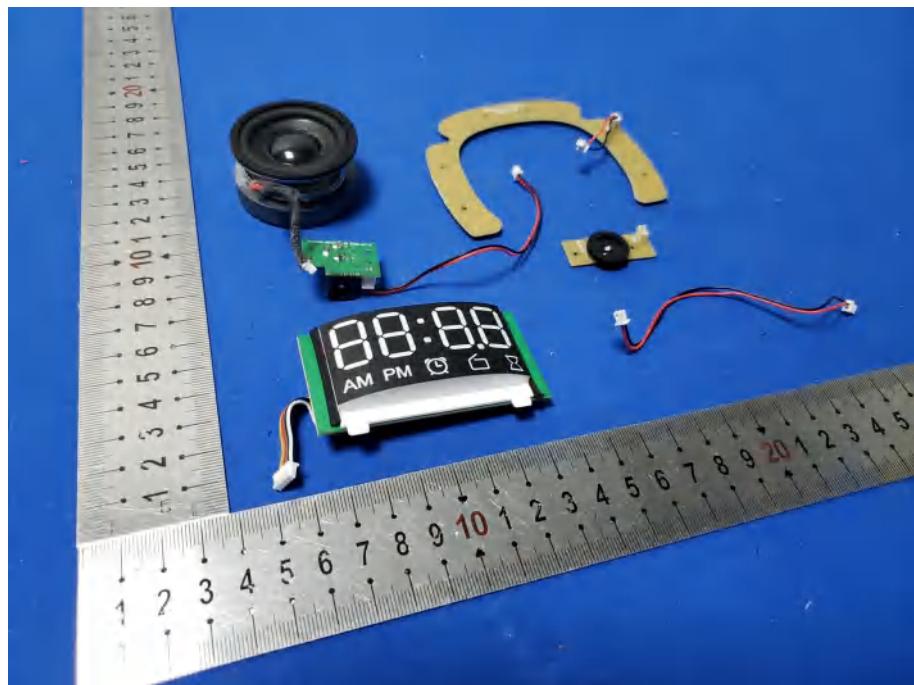



*** END OF REPORT ***