

TEST REPORT

Product Name: Asset GPS tracker
FCC ID: 2AWWA-LOCATEXT
Trademark: N/A
Model Number: LOCATE XT
Prepared For: KYCS Global Inc.
Address: 12 Proctor Rd, 2nd floor Schomberg Ontario Canada, Postal code L0G1T0
Manufacturer: Shenzhen Kingwo IoT Co., Ltd.
Address: Room302, Comprehensive Building Tsinghua Information High-Tech Park,
Nanshan Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District,
Shenzhen, Guangdong, China
Sample Received Date: Feb. 13, 2023
Sample tested Date: Feb. 13, 2023 to Feb. 17, 2023
Issue Date: Feb. 17, 2023
Report No.: CTB230217011RF
Test Standards: FCC Part 2, 22, 24E, 27
Test Results: PASS
Remark: This is CATM1 radio test report.

Compiled by:

Reviewed by:

Approved by:

ChenZheng

Arron Liu

Chen ZhengArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	7
4.5 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. RF EXPOSURE	10
6.1 Standard Applicable	10
6.2 Test Result	10
7. RF OUTPUT POWER	11
7.1 Standard Applicable	11
7.2 Test Procedure	11
7.3 Summary of Test Results/Plots	12
8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	21
8.1 Standard Applicable	21
8.2 Test Procedure	21
8.3 Summary of Test Results	21
9. EMISSION BANDWIDTH	22
9.1 Standard Applicable	22
9.2 Test Procedure	22
9.3 Summary of Test Results/Plots	22
10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	23
10.1 Standard Applicable	23
10.2 Test Procedure	23
10.3 Summary of Test Results/Plots	24
11. SPURIOUS RADIATED EMISSIONS	25
11.1 Standard Applicable	25
11.2 Test Procedure	26
11.3 Summary of Test Results/Plots	26
12. FREQUENCY STABILITY	39
12.1 Standard Applicable	39
12.2 Test Procedure	39
12.3 Summary of Test Results/Plots	39

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB230217011RF	Feb. 17, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
Conducted output power	Part 2.1046(a)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 22.913(a)(5)/Part27.50(h)(2)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v03r01	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	Part 2.1053/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	LOCATE XT
Model Description:	N/A
Hardware Version:	P10
Software Version:	V3.17
Operation Frequency:	CAT M1 BAND 2:1850-1910MHz CAT M1 BAND 4:1710-1755MHz CAT M1 BAND 12:699-716MHz CAT M1 BAND 13:777-787MHz
Max. RF output power:	CAT M1 BAND 2: 20.39dBm CAT M1 BAND 4: 20.04dBm CAT M1 BAND 12: 18.77dBm CAT M1 BAND 13: 19.62dBm
Type of Modulation:	QPSK, 16QAM
Antenna installation:	FPC antenna
Antenna Gain:	CAT M1 BAND 2: 2.93dBi CAT M1 BAND 4: 3.83dBi CAT M1 BAND 12: -3.93dBi CAT M1 BAND 13: -1.82dBi
Ratings:	DC 3.6V from DC battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	CAT M1 BAND 2	Low, Middle, High Channels
TM2	CAT M1 BAND 4	Low, Middle, High Channels
TM3	CAT M1 BAND 12	Low, Middle, High Channels
TM4	CAT M1 BAND 13	Low, Middle, High Channels

4.5 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.6V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

6. RF EXPOSURE

6.1 Standard Applicable

According to §1.1307 and §2.1091, §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

7. RF OUTPUT POWER

7.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

7.2 Test Procedure

Conducted output power test method:

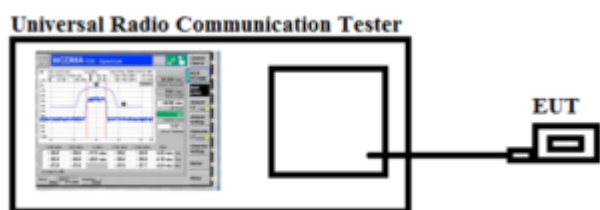

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Summary of Test Results/Plots

Max. Radiated Power:

CAT M1 Band 2

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.41	<33.33	PASS
		H	17.71		
	MCH	V	18.69		PASS
		H	19.04		
	HCH	V	17.92		PASS
		H	19.03		
16QAM	LCH	V	18.05	<33.33	PASS
		H	19.35		
	MCH	V	17.43		PASS
		H	18.11		
	HCH	V	18.59		PASS
		H	19.09		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.67	<33.33	PASS
		H	18.74		
	MCH	V	17.23		PASS
		H	17.41		
	HCH	V	18.63		PASS
		H	17.40		
16QAM	LCH	V	18.86	<33.00	PASS
		H	17.93		
	MCH	V	17.74		PASS
		H	18.38		
	HCH	V	17.74		PASS
		H	17.10		

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.41	<33.00	PASS
		H	18.11		
	MCH	V	17.97		PASS
		H	18.67		
	HCH	V	18.11		PASS
		H	17.59		
16QAM	LCH	V	19.37	<33.00	PASS
		H	18.62		
	MCH	V	18.75		PASS
		H	18.78		
	HCH	V	19.24		PASS
		H	17.73		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.34	<33.00	PASS
		H	18.24		
	MCH	V	18.98		PASS
		H	18.42		
	HCH	V	19.49		PASS
		H	19.09		
16QAM	LCH	V	19.77	<33.00	PASS
		H	19.18		
	MCH	V	18.68		PASS
		H	18.54		
	HCH	V	19.22		PASS
		H	19.06		

Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.65	<33.00	PASS
		H	18.77		
	MCH	V	19.00		PASS
		H	18.95		
	HCH	V	20.35		PASS
		H	18.69		
16QAM	LCH	V	19.29	<33.00	PASS
		H	19.83		
	MCH	V	19.39		PASS
		H	20.32		
	HCH	V	19.03		PASS

Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.05	<33.00	PASS
		H	19.27		
	MCH	V	19.18		PASS
		H	20.15		
	HCH	V	19.90		PASS
		H	20.03		
16QAM	LCH	V	19.49	<33.00	PASS
		H	19.86		
	MCH	V	19.39		PASS
		H	19.43		
	HCH	V	20.39		PASS

CAT M1 Band 4

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.33	<30.00	PASS
		H	18.85		
	MCH	V	18.50		PASS
		H	18.53		
	HCH	V	17.82		PASS
		H	17.60		
16QAM	LCH	V	17.83	<30.00	PASS
		H	18.12		
	MCH	V	19.36		PASS
		H	18.99		
	HCH	V	18.38		PASS
		H	19.25		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	17.33	<30.00	17.33
		H	17.53		17.53
	MCH	V	18.35		18.35
		H	17.22		17.22
	HCH	V	17.39		17.39
		H	17.75		17.75
16QAM	LCH	V	18.45	<30.00	18.45
		H	18.57		18.57
	MCH	V	17.55		17.55
		H	18.77		18.77
	HCH	V	18.60		18.60
		H	18.16		

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.88	<30.00	PASS
		H	18.64		
	MCH	V	19.68		PASS
		H	18.63		
	HCH	V	19.94		PASS
		H	18.89		
16QAM	LCH	V	20.00	<30.00	PASS
		H	18.76		
	MCH	V	19.44		PASS
		H	18.57		
	HCH	V	19.71		PASS
		H	18.51		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.81	<30.00	PASS
		H	19.68		
	MCH	V	19.88		PASS
		H	19.75		
	HCH	V	19.87		PASS
		H	19.70		
16QAM	LCH	V	19.88	<30.00	PASS
		H	19.72		
	MCH	V	19.27		PASS
		H	19.34		
	HCH	V	19.33		PASS
		H	19.38		

Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.88	<30.00	PASS
		H	19.66		
	MCH	V	19.78		PASS
		H	19.45		
	HCH	V	19.97		PASS
		H	19.91		
16QAM	LCH	V	19.97	<30.00	PASS
		H	19.64		
	MCH	V	19.47		PASS
		H	19.67		
	HCH	V	19.87		PASS
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.60	<30.00	PASS
		H	19.60		
	MCH	V	19.69		PASS
		H	19.59		
	HCH	V	19.82		PASS
		H	19.81		
16QAM	LCH	V	19.81	<30.00	PASS
		H	19.66		
	MCH	V	19.45		PASS
		H	19.57		
	HCH	V	20.04		PASS

CAT M1 Band 12

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	16.52	<34.77	PASS
		H	16.18		
	MCH	V	17.23		PASS
		H	15.93		
	HCH	V	18.59		PASS
		H	16.16		
16QAM	LCH	V	17.35	<34.77	PASS
		H	16.13		
	MCH	V	18.21		PASS
		H	16.18		
	HCH	V	16.21		PASS
		H	16.42		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.46	<34.77	PASS
		H	16.19		
	MCH	V	17.14		PASS
		H	16.10		
	HCH	V	18.51		PASS
		H	16.26		
16QAM	LCH	V	17.26	<34.77	PASS
		H	16.16		
	MCH	V	18.10		PASS
		H	16.20		
	HCH	V	16.24		PASS
		H	16.36		

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.61	<34.77	PASS
		H	17.28		
	MCH	V	18.73		PASS
		H	17.22		
	HCH	V	18.36		PASS
		H	17.32		
16QAM	LCH	V	18.72	<34.77	PASS
		H	17.31		
	MCH	V	18.42		PASS
		H	17.41		
	HCH	V	18.75		PASS
		H	17.36		

Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.60	<34.77	PASS
		H	18.34		
	MCH	V	18.73		PASS
		H	18.48		
	HCH	V	18.50		PASS
		H	18.50		
16QAM	LCH	V	18.71	<34.77	PASS
		H	18.46		
	MCH	V	18.55		PASS
		H	18.64		
	HCH	V	18.76		PASS
		H	18.77		

CAT M1 Band 13

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	18.25	<34.77	PASS
		H	17.81		
	MCH	V	19.37		PASS
		H	17.81		
	HCH	V	19.26		PASS
		H	17.99		
16QAM	LCH	V	19.52	<34.77	PASS
		H	17.96		
	MCH	V	18.77		PASS
		H	17.86		
	HCH	V	18.92		PASS
		H	17.61		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.13	<34.77	PASS
		H	19.50		
	MCH	V	18.73		PASS
		H	19.54		
	HCH	V	19.43		PASS
		H	19.06		
16QAM	LCH	V	18.68	<34.77	PASS
		H	18.81		
	MCH	V	19.21		PASS
		H	18.97		
	HCH	V	19.62		PASS

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

8.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal


corresponding to the highest PAPR expected during periods of continuous transmission.

8.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

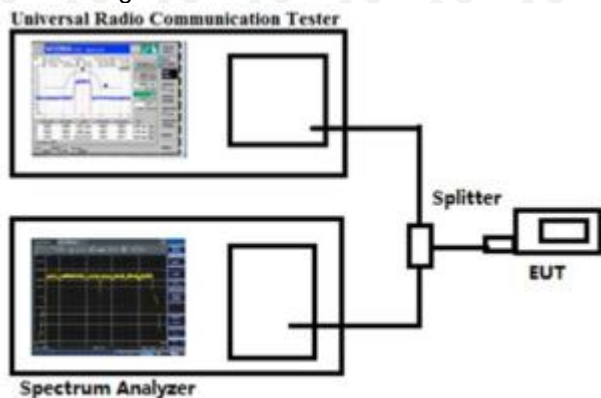

8.3 Summary of Test Results

Please refer to Appendix C: Peak-to-Average Ratio

Test result: Pass

9. EMISSION BANDWIDTH

9.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

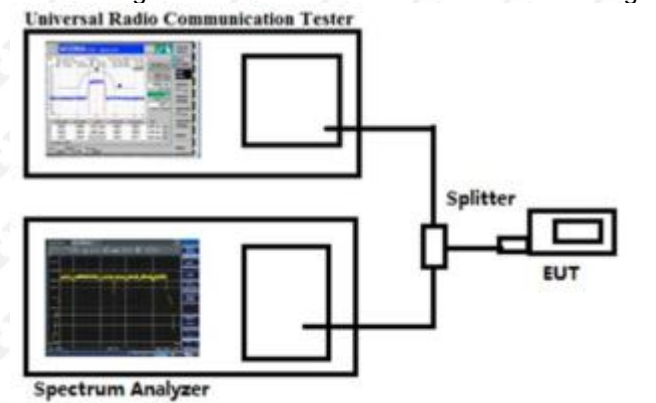

9.3 Summary of Test Results/Plots

Please refer to Appendix D: 26dB Bandwidth and Occupied Bandwidth
Test result: Pass

10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz.

10.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10 th harmonic.

Test Configuration for the out of band emissions testing:

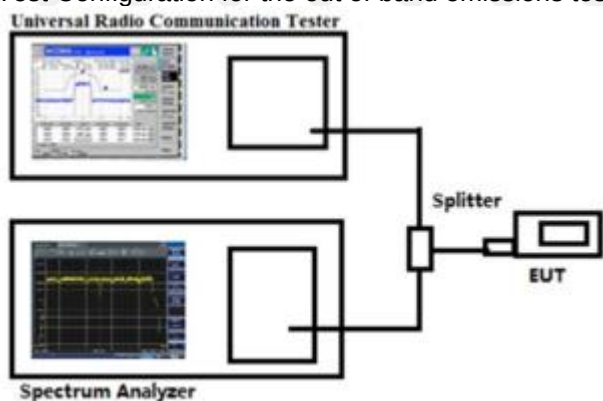

10.3 Summary of Test Results/Plots

Please refer to Appendix E & F: Band Edge & Conducted Spurious Emission

Test result: Pass

11. SPURIOUS RADIATED EMISSIONS

11.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

11.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

11.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.
2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

Test Data:
QPSK

Band 2 18607 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1284.46	146	176	-55.52	-13	-42.52	Pass	H
1650.37	145	136	-52.19	-13	-39.19	Pass	H
3907.75	151	134	-51.80	-13	-38.80	Pass	H
5880.28	155	211	-45.31	-13	-32.31	Pass	H
6508.98	157	157	-45.67	-13	-32.67	Pass	H
8065.01	141	328	-46.27	-13	-33.27	Pass	H
1138.31	160	225	-53.71	-13	-40.71	Pass	V
1373.08	141	21	-60.88	-13	-47.88	Pass	V
3535.68	140	126	-50.90	-13	-37.90	Pass	V
3811.34	158	186	-50.79	-13	-37.79	Pass	V
5748.62	155	13	-45.25	-13	-32.25	Pass	V
6516.89	156	308	-49.71	-13	-36.71	Pass	V

Band 2 18900 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1421.86	153	6	-55.27	-13	-42.27	Pass	H
1679.91	154	339	-52.91	-13	-39.91	Pass	H
3814.34	160	146	-48.19	-13	-35.19	Pass	H
5880.15	158	123	-46.13	-13	-33.13	Pass	H
6442.12	156	301	-46.78	-13	-33.78	Pass	H
8081.71	159	80	-45.58	-13	-32.58	Pass	H
1207.24	140	212	-57.50	-13	-44.50	Pass	V
1409.63	140	224	-58.65	-13	-45.65	Pass	V
3476.80	144	148	-51.79	-13	-38.79	Pass	V
3933.89	150	337	-50.50	-13	-37.50	Pass	V
5878.58	145	13	-44.48	-13	-31.48	Pass	V
6549.77	145	22	-50.41	-13	-37.41	Pass	V

Band 2 19193 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1237.90	151	262	-53.47	-13	-40.47	Pass	H
1635.96	144	108	-51.07	-13	-38.07	Pass	H
3924.25	148	44	-48.93	-13	-35.93	Pass	H
5950.12	160	255	-45.52	-13	-32.52	Pass	H
6523.53	150	127	-45.42	-13	-32.42	Pass	H
7903.66	152	301	-47.13	-13	-34.13	Pass	H
1287.52	157	330	-58.33	-13	-45.33	Pass	V
1467.05	142	316	-60.45	-13	-47.45	Pass	V
3559.96	157	173	-50.30	-13	-37.30	Pass	V
3899.01	146	254	-47.70	-13	-34.70	Pass	V
5736.23	156	30	-46.93	-13	-33.93	Pass	V
6634.64	144	271	-51.11	-13	-38.11	Pass	V

16QAM

Band 2 18607 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1248.83	149	184	-58.07	-13	-45.07	Pass	H
1767.95	141	176	-51.30	-13	-38.30	Pass	H
3906.19	151	231	-49.93	-13	-36.93	Pass	H
5916.63	143	280	-44.73	-13	-31.73	Pass	H
6459.57	147	202	-46.19	-13	-33.19	Pass	H
8082.68	159	128	-49.33	-13	-36.33	Pass	H
1222.32	157	332	-56.05	-13	-43.05	Pass	V
1420.04	147	119	-58.88	-13	-45.88	Pass	V
3485.45	159	330	-55.09	-13	-42.09	Pass	V
3843.07	143	270	-48.26	-13	-35.26	Pass	V
5716.35	154	335	-47.63	-13	-34.63	Pass	V
6622.48	150	328	-48.60	-13	-35.60	Pass	V

Band 2 18900 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1242.70	151	189	-56.68	-13	-43.68	Pass	H
1711.49	155	23	-46.95	-13	-33.95	Pass	H
3771.74	147	309	-47.47	-13	-34.47	Pass	H
5921.50	154	354	-47.69	-13	-34.69	Pass	H
6522.08	147	17	-46.95	-13	-33.95	Pass	H
8080.03	147	326	-43.50	-13	-30.50	Pass	H
1242.67	154	69	-50.62	-13	-37.62	Pass	V
1389.18	148	307	-55.54	-13	-42.54	Pass	V
3615.54	146	84	-52.08	-13	-39.08	Pass	V
3805.63	146	148	-51.74	-13	-38.74	Pass	V
5850.33	151	125	-47.99	-13	-34.99	Pass	V
6543.75	146	225	-51.72	-13	-38.72	Pass	V

Band 2 19193 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1417.06	150	84	-59.99	-13	-46.99	Pass	H
1774.15	152	0	-47.55	-13	-34.55	Pass	H
3875.73	146	29	-48.84	-13	-35.84	Pass	H
5986.88	154	64	-45.92	-13	-32.92	Pass	H
6486.14	151	197	-42.93	-13	-29.93	Pass	H
7935.10	146	343	-44.59	-13	-31.59	Pass	H
1130.77	149	32	-52.65	-13	-39.65	Pass	V
1476.37	154	153	-58.23	-13	-45.23	Pass	V
3582.07	148	155	-48.90	-13	-35.90	Pass	V
3932.09	154	299	-52.03	-13	-39.03	Pass	V
5793.97	154	192	-44.60	-13	-31.60	Pass	V
6495.64	145	329	-50.43	-13	-37.43	Pass	V

Note:

- 1) Scan from 9kHz to 40GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 4 19957 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1375.69	154	121	-53.23	-13	-40.23	Pass	H
1651.89	152	216	-52.65	-13	-39.65	Pass	H
3999.43	140	61	-47.34	-13	-34.34	Pass	H
5798.56	147	14	-47.78	-13	-34.78	Pass	H
6462.59	144	39	-44.26	-13	-31.26	Pass	H
8011.02	159	67	-48.66	-13	-35.66	Pass	H
1201.85	145	235	-56.38	-13	-43.38	Pass	V
1518.79	146	300	-60.79	-13	-47.79	Pass	V
3472.41	159	226	-50.84	-13	-37.84	Pass	V
3819.44	153	146	-50.14	-13	-37.14	Pass	V
5839.86	155	323	-48.07	-13	-35.07	Pass	V
6630.19	160	18	-48.43	-13	-35.43	Pass	V

Band 4 20175 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1424.91	153	18	-55.04	-13	-42.04	Pass	H
1644.84	158	62	-50.25	-13	-37.25	Pass	H
3954.60	152	339	-48.29	-13	-35.29	Pass	H
5899.71	142	252	-47.07	-13	-34.07	Pass	H
6405.91	144	55	-43.93	-13	-30.93	Pass	H
7992.84	152	235	-48.10	-13	-35.10	Pass	H
1297.20	144	349	-54.59	-13	-41.59	Pass	V
1462.95	141	38	-61.27	-13	-48.27	Pass	V
3658.59	148	334	-50.20	-13	-37.20	Pass	V
3812.23	154	199	-47.85	-13	-34.85	Pass	V
5710.30	154	212	-47.79	-13	-34.79	Pass	V
6507.06	153	184	-47.82	-13	-34.82	Pass	V

Band 4 20393 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1256.06	144	147	-56.50	-13	-43.50	Pass	H
1708.05	145	1	-48.55	-13	-35.55	Pass	H
3810.71	155	280	-47.85	-13	-34.85	Pass	H
5802.32	157	218	-47.65	-13	-34.65	Pass	H
6502.51	151	333	-43.53	-13	-30.53	Pass	H
8040.53	156	86	-46.62	-13	-33.62	Pass	H
1191.70	159	153	-57.89	-13	-44.89	Pass	V
1403.19	157	233	-58.71	-13	-45.71	Pass	V
3567.52	157	23	-50.54	-13	-37.54	Pass	V
3791.63	151	301	-50.45	-13	-37.45	Pass	V
5843.97	156	50	-43.88	-13	-30.88	Pass	V
6619.14	147	83	-50.60	-13	-37.60	Pass	V

16QAM

Band 4 19957 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1330.84	158	328	-55.31	-13	-42.31	Pass	H
1685.54	155	56	-49.85	-13	-36.85	Pass	H
3808.46	140	292	-47.70	-13	-34.70	Pass	H
5787.93	146	118	-46.79	-13	-33.79	Pass	H
6544.99	140	314	-45.19	-13	-32.19	Pass	H
7930.69	143	312	-47.59	-13	-34.59	Pass	H
1243.52	151	168	-57.97	-13	-44.97	Pass	V
1409.11	151	354	-59.66	-13	-46.66	Pass	V
3475.40	143	194	-53.76	-13	-40.76	Pass	V
3773.60	150	312	-46.19	-13	-33.19	Pass	V
5817.59	158	248	-47.40	-13	-34.40	Pass	V
6569.40	144	211	-49.17	-13	-36.17	Pass	V

Band 4 20175 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1409.11	142	280	-56.32	-13	-43.32	Pass	H
1762.01	141	13	-49.43	-13	-36.43	Pass	H
3888.80	141	193	-50.17	-13	-37.17	Pass	H
5865.43	148	342	-47.27	-13	-34.27	Pass	H
6571.10	147	263	-46.21	-13	-33.21	Pass	H
7901.37	152	122	-48.05	-13	-35.05	Pass	H
1301.14	145	13	-54.37	-13	-41.37	Pass	V
1393.82	144	257	-58.61	-13	-45.61	Pass	V
3568.32	150	296	-53.68	-13	-40.68	Pass	V
3808.93	141	276	-48.87	-13	-35.87	Pass	V
5763.69	151	143	-45.88	-13	-32.88	Pass	V
6491.18	146	93	-46.78	-13	-33.78	Pass	V

Band 4 20393 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1319.28	153	309	-53.38	-13	-40.38	Pass	H
1763.71	158	18	-51.89	-13	-38.89	Pass	H
3815.78	148	307	-47.79	-13	-34.79	Pass	H
5782.17	154	41	-46.10	-13	-33.10	Pass	H
6475.46	152	173	-43.25	-13	-30.25	Pass	H
8008.02	157	349	-48.69	-13	-35.69	Pass	H
1284.90	160	190	-55.10	-13	-42.10	Pass	V
1384.87	148	64	-58.79	-13	-45.79	Pass	V
3630.89	160	81	-51.92	-13	-38.92	Pass	V
3764.85	152	61	-48.73	-13	-35.73	Pass	V
5894.38	146	62	-45.95	-13	-32.95	Pass	V
6521.98	155	279	-49.77	-13	-36.77	Pass	V

QPSK

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1432.80	153	303	-55.77	-13	-42.77	Pass	H
1688.50	157	16	-51.51	-13	-38.51	Pass	H
3803.24	149	299	-50.01	-13	-37.01	Pass	H
5888.01	146	174	-46.18	-13	-33.18	Pass	H
6525.37	158	166	-43.45	-13	-30.45	Pass	H
7962.56	141	359	-45.67	-13	-32.67	Pass	H
1135.32	145	184	-57.41	-13	-44.41	Pass	V
1430.34	141	290	-60.14	-13	-47.14	Pass	V
3473.20	155	208	-53.39	-13	-40.39	Pass	V
3813.15	157	345	-48.34	-13	-35.34	Pass	V
5812.28	157	70	-43.82	-13	-30.82	Pass	V
6545.97	142	360	-46.62	-13	-33.62	Pass	V

Band 12 23095 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1425.89	149	203	-56.57	-13	-43.57	Pass	H
1724.85	160	253	-52.73	-13	-39.73	Pass	H
3891.71	152	105	-49.36	-13	-36.36	Pass	H
5850.88	149	124	-46.60	-13	-33.60	Pass	H
6466.33	149	331	-45.98	-13	-32.98	Pass	H
7979.68	144	348	-48.26	-13	-35.26	Pass	H
1189.89	141	341	-56.53	-13	-43.53	Pass	V
1412.06	145	42	-57.78	-13	-44.78	Pass	V
3665.02	158	166	-51.37	-13	-38.37	Pass	V
3932.29	148	232	-47.27	-13	-34.27	Pass	V
5783.43	157	49	-45.43	-13	-32.43	Pass	V
6594.20	141	332	-49.36	-13	-36.36	Pass	V

Band 12 23173 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1274.17	153	86	-53.02	-13	-40.02	Pass	H
1745.42	155	178	-50.14	-13	-37.14	Pass	H
3904.07	151	223	-42.94	-13	-29.94	Pass	H
5967.87	147	196	-39.43	-13	-26.43	Pass	H
6544.11	153	352	-41.11	-13	-28.11	Pass	H
8005.61	150	14	-47.68	-13	-34.68	Pass	H
1158.92	152	29	-56.99	-13	-43.99	Pass	V
1558.57	148	0	-55.81	-13	-42.81	Pass	V
3547.07	147	304	-50.90	-13	-37.90	Pass	V
3807.41	148	169	-52.74	-13	-39.74	Pass	V
5818.96	150	303	-50.46	-13	-37.46	Pass	V
6620.46	146	158	-44.42	-13	-31.42	Pass	V

16QAM

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1426.87	153	209	-53.04	-13	-40.04	Pass	H
1615.78	151	309	-46.98	-13	-33.98	Pass	H
3922.53	148	193	-46.26	-13	-33.26	Pass	H
5816.54	151	231	-44.75	-13	-31.75	Pass	H
6575.27	152	248	-44.28	-13	-31.28	Pass	H
8062.14	153	132	-44.68	-13	-31.68	Pass	H
1149.58	154	345	-52.47	-13	-39.47	Pass	V
1454.69	145	290	-61.55	-13	-48.55	Pass	V
3512.91	148	238	-48.40	-13	-35.40	Pass	V
3738.39	146	99	-52.73	-13	-39.73	Pass	V
5866.68	152	75	-51.40	-13	-38.40	Pass	V
6640.45	151	153	-43.59	-13	-30.59	Pass	V

Band 12 23095 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1348.09	151	203	-53.87	-13	-40.87	Pass	H
1650.08	152	302	-47.43	-13	-34.43	Pass	H
3836.96	145	78	-44.21	-13	-31.21	Pass	H
5925.03	153	258	-43.19	-13	-30.19	Pass	H
6604.25	146	280	-41.80	-13	-28.80	Pass	H
8140.02	148	250	-48.51	-13	-35.51	Pass	H
1268.23	150	347	-56.02	-13	-43.02	Pass	V
1372.91	152	25	-60.47	-13	-47.47	Pass	V
3631.38	146	110	-49.50	-13	-36.50	Pass	V
3906.18	153	243	-53.61	-13	-40.61	Pass	V
5751.23	145	116	-49.06	-13	-36.06	Pass	V
6483.49	152	244	-47.53	-13	-34.53	Pass	V

Band 12 23173 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1391.38	149	166	-53.33	-13	-40.33	Pass	H
1621.79	147	160	-46.58	-13	-33.58	Pass	H
3889.55	146	262	-40.47	-13	-27.47	Pass	H
5971.85	148	124	-39.01	-13	-26.01	Pass	H
6434.67	149	150	-44.33	-13	-31.33	Pass	H
8064.18	155	287	-43.96	-13	-30.96	Pass	H
1115.71	146	334	-51.83	-13	-38.83	Pass	V
1551.67	154	32	-61.45	-13	-48.45	Pass	V
3475.20	146	78	-48.30	-13	-35.30	Pass	V
3788.39	151	115	-49.63	-13	-36.63	Pass	V
5750.34	153	123	-47.29	-13	-34.29	Pass	V
6652.63	151	292	-45.88	-13	-32.88	Pass	V

QPSK

Band 13 23205 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1328.07	147	316	-55.37	-13	-42.37	Pass	H
1665.29	155	204	-47.36	-13	-34.36	Pass	H
3827.24	146	315	-47.04	-13	-34.04	Pass	H
5936.83	147	232	-43.56	-13	-30.56	Pass	H
6512.95	154	94	-42.38	-13	-29.38	Pass	H
8113.66	155	197	-43.43	-13	-30.43	Pass	H
1280.73	150	53	-52.71	-13	-39.71	Pass	V
1484.01	146	144	-60.34	-13	-47.34	Pass	V
3482.88	151	241	-50.69	-13	-37.69	Pass	V
3825.07	150	9	-51.60	-13	-38.60	Pass	V
5744.90	146	177	-51.23	-13	-38.23	Pass	V
6618.51	154	145	-43.22	-13	-30.22	Pass	V

Band 13 23230 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1428.09	154	295	-59.15	-13	-46.15	Pass	H
1801.75	150	131	-50.93	-13	-37.93	Pass	H
3810.69	154	76	-42.20	-13	-29.20	Pass	H
5884.97	153	160	-41.33	-13	-28.33	Pass	H
6434.19	146	317	-38.90	-13	-25.90	Pass	H
7987.78	150	317	-47.79	-13	-34.79	Pass	H
1115.27	146	64	-58.26	-13	-45.26	Pass	V
1454.07	151	349	-55.27	-13	-42.27	Pass	V
3532.89	155	53	-47.21	-13	-34.21	Pass	V
3802.00	151	246	-47.41	-13	-34.41	Pass	V
5837.76	146	18	-48.71	-13	-35.71	Pass	V
6533.42	154	324	-42.08	-13	-29.08	Pass	V

Band 13 23255 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1284.02	147	267	-55.85	-13	-42.85	Pass	H
1658.06	146	116	-46.10	-13	-33.10	Pass	H
3932.05	147	138	-43.08	-13	-30.08	Pass	H
5808.11	147	98	-44.62	-13	-31.62	Pass	H
6457.16	154	341	-37.92	-13	-24.92	Pass	H
8062.16	151	176	-43.76	-13	-30.76	Pass	H
1276.31	153	172	-53.48	-13	-40.48	Pass	V
1538.41	150	341	-60.97	-13	-47.97	Pass	V
3581.92	149	208	-50.12	-13	-37.12	Pass	V
3781.20	151	207	-51.96	-13	-38.96	Pass	V
5792.63	153	225	-45.89	-13	-32.89	Pass	V
6596.25	151	172	-46.63	-13	-33.63	Pass	V

16QAM

Band 13 23205 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1406.26	154	298	-57.60	-13	-44.60	Pass	H
1736.22	148	175	-47.45	-13	-34.45	Pass	H
3894.68	149	314	-44.52	-13	-31.52	Pass	H
5862.06	146	290	-45.23	-13	-32.23	Pass	H
6566.54	148	254	-41.87	-13	-28.87	Pass	H
7988.26	153	256	-45.00	-13	-32.00	Pass	H
1160.21	147	9	-57.56	-13	-44.56	Pass	V
1505.69	149	238	-61.67	-13	-48.67	Pass	V
3634.65	153	10	-49.98	-13	-36.98	Pass	V
3870.75	150	41	-51.63	-13	-38.63	Pass	V
5814.01	152	77	-50.40	-13	-37.40	Pass	V
6565.33	148	112	-43.39	-13	-30.39	Pass	V

Band 13 23230 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1254.91	146	6	-52.46	-13	-39.46	Pass	H
1669.72	147	328	-48.96	-13	-35.96	Pass	H
3934.30	150	178	-43.21	-13	-30.21	Pass	H
5805.02	151	137	-41.26	-13	-28.26	Pass	H
6547.36	154	273	-43.12	-13	-30.12	Pass	H
7978.79	146	254	-41.92	-13	-28.92	Pass	H
1252.20	149	271	-54.28	-13	-41.28	Pass	V
1508.39	154	34	-58.19	-13	-45.19	Pass	V
3626.80	155	323	-46.36	-13	-33.36	Pass	V
3870.68	147	109	-50.97	-13	-37.97	Pass	V
5782.61	146	221	-46.44	-13	-33.44	Pass	V
6568.48	152	60	-42.44	-13	-29.44	Pass	V

Band 13 23225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.37	153	273	-53.26	-13	-40.26	Pass	H
1652.47	149	69	-51.01	-13	-38.01	Pass	H
3827.54	147	152	-43.79	-13	-30.79	Pass	H
5897.54	151	34	-44.75	-13	-31.75	Pass	H
6597.24	146	228	-40.42	-13	-27.42	Pass	H
8003.02	155	358	-42.99	-13	-29.99	Pass	H
1184.77	149	207	-58.24	-13	-45.24	Pass	V
1522.96	146	324	-59.58	-13	-46.58	Pass	V
3634.93	147	35	-50.64	-13	-37.64	Pass	V
3906.08	153	353	-47.63	-13	-34.63	Pass	V
5732.85	146	247	-48.73	-13	-35.73	Pass	V
6643.42	149	21	-42.62	-13	-29.62	Pass	V

Note:

3) 1)Scan from 9kHz to 40GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

4) 2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 5.0MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

12. FREQUENCY STABILITY

12.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

12.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

12.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=DC3.6V; Low Voltage LV=DC3.24V; High Voltage HV=DC3.96V

Please refer to Appendix F: Frequency Stability

Test result: Pass

***** END OF REPORT *****