

TEST REPORT

Applicant: Arashi Vision Inc.

Address of Applicant: 11th Floor, Building 2, Jinlitong Financial Center Bao'an District, 518000 Shenzhen, Guangdong, China

Manufacturer: Arashi Vision Inc.

Address of Manufacturer: 11th Floor, Building 2, Jinlitong Financial Center Bao'an District, 518000 Shenzhen, Guangdong, China

Equipment Under Test (EUT)

Product Name: Insta360 GO Ultra Standalone Camera

Model No.: CINSABEA

Trade Mark: Insta360

FCC ID: 2AWWH-CINSABEA

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: April 11, 2025

Date of Test: April 12, 2025-June 13, 2025

Date of report issue: June 13, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:


Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 13, 2025	Original

Prepared By:




Date:

June 13, 2025

Project Engineer

Check By:

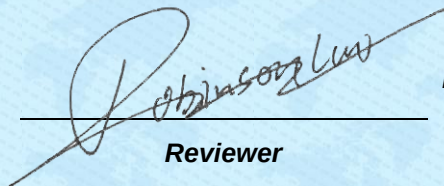

Date:

June 13, 2025

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY	7
5.4 TEST LOCATION.....	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 DEVIATION FROM STANDARDS	7
5.7 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT:	10
7.2 CONDUCTED EMISSIONS	11
7.3 EMISSION BANDWIDTH	14
7.4 MAXIMUM CONDUCTED OUTPUT POWER.....	15
7.5 POWER SPECTRAL DENSITY	16
7.6 BAND EDGE.....	17
7.7 RADIATED EMISSION	28
7.8 FREQUENCY STABILITY	66
8 TEST SETUP PHOTO	68
9 EUT CONSTRUCTIONAL DETAILS	68

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Emission Bandwidth	FCC part 15.407	PASS
Maximum Conducted Output Power	FCC part 15.407(a)(1)	PASS
Power Spectral Density	FCC part 15.407(a)(1)	PASS
Undesirable Emission	FCC part 15.407(b), 15.205/15.209	PASS
Radiated Emission	FCC part 15.205/15.209	PASS
Band Edge	FCC part 15.407(b)(1)	PASS
Frequency Stability	FCC part 15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Insta360 GO Ultra Standalone Camera			
Model No.:	CINSABEA			
Test sample(s) ID:	GTS2025040036-1			
Sample(s) Status:	Engineer sample			
S/N:	IBEEA25036ERHW			
Operation Frequency:	Band	Mode	Frequency Range (MHz)	Number of channels
	U-NII Band I	IEEE 802.11a	5180-5240	4
		IEEE 802.11n/ac/ax 20MHz	5180-5240	4
		IEEE 802.11n/ac/ax 40MHz	5190-5230	2
		IEEE 802.11ac/ax 80MHz	5210	1
	U-NII Band II-2A	IEEE 802.11a	5260-5320	4
		IEEE 802.11n/ac/ax 20MHz	5260-5320	4
		IEEE 802.11n/ac/ax 40MHz	5270-5310	2
		IEEE 802.11ac/ax 80MHz	5290	1
	U-NII Band II-2C	IEEE 802.11a	5500-5700	11
		IEEE 802.11n/ac/ax 20MHz	5500-5700	11
		IEEE 802.11n/ac/ax 40MHz	5510-5670	5
		IEEE 802.11ac/ax 80MHz	5530-5610	2
Modulation technology:	OFDM			
Antenna Type:	FPC Antenna			
Antenna gain:	Band I:1.26dBi, Band II-2A:0.81dBi, Band II-2C:1.09dBi			
Power supply:	DC 5V=3A Or DC 3.87V, 500mAh, 1.935Wh			

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Channel list for 802.11a/n(HT20)/ac(HT20)/ax(HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz
52	5260MHz	56	5280MHz	60	5300MHz	64	5320MHz
100	5500MHz	104	5520MHz	108	5540MHz	112	5560MHz
116	5580MHz	120	5600MHz	124	5620MHz	128	5640MHz
132	5660MHz	136	5680MHz	140	5700MHz		

Channel list for 802.11n(HT40)/ac(HT40)/ax(HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz	54	5270MHz	62	5310MHz
102	5510MHz	110	5550MHz	118	5590MHz	126	5630MHz
134	5670MHz						

Channel list for 802.11ac(HT80) /ax(HE80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210MHz	58	5290MHz	106	5530MHz	122	5610MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..		
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
Mode	Data rate	Mode	Data rate
802.11a/n/ac (HT20) /ax(HE20)	6/6.5 Mbps	802.11ac(HT80) /ax(HE80)	29.3 Mbps
802.11n/ac(HT40) /ax(HE40)	13.5 Mbps		

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing . ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number
Supplied by client	adapter	A2678	AC24YFOE52222096
Insta 360	Charging base	CINSBBEA	N/A

5.6 Deviation from Standards

None.

5.7 Additional Instructions

Test Software	Secure CRT (Version 6.2.3)
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 02, 2024	Jul. 01, 2025
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.16, 2024	Nov.15, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 11, 2025	Mar. 10, 2026
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 13, 2024	Nov. 12, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 02, 2024	Jul. 01, 2025
17	RE cable 2	GTS	N/A	GTS676	Jul. 02, 2024	Jul. 01, 2025
18	RE cable 3	GTS	N/A	GTS677	Jul. 02, 2024	Jul. 01, 2025
19	RE cable 4	GTS	N/A	GTS678	Jul. 02, 2024	Jul. 01, 2025
20	RE cable 5	GTS	N/A	GTS679	Jul. 02, 2024	Jul. 01, 2025
21	RE cable 6	GTS	N/A	GTS680	Jul. 02, 2024	Jul. 01, 2025
22	RE cable 7	GTS	N/A	GTS681	Jul. 05, 2024	Jul. 04, 2025
23	RE cable 8	GTS	N/A	GTS682	Jul. 05, 2024	Jul. 04, 2025
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2025	Apr. 10, 2026
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 15, 2025	Apr. 14, 2026
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 12, 2025	Apr. 11, 2026
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2025	Apr. 10, 2026
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2025	Apr. 10, 2026
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2025	Apr. 10, 2026
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 11, 2025	Apr. 10, 2026
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 11, 2025	Apr. 10, 2026
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 11, 2025	Apr. 10, 2026
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2025	Apr. 10, 2026
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 11, 2025	Apr. 10, 2026
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 11, 2025	Apr. 10, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026
11	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Nov. 02, 2024	Nov. 01, 2025

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Aug. 17, 2024	Aug. 16, 2025

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is FPC antenna, reference to the appendix II for details	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak		Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
	5-30	60		50		
* Decreases with the logarithm of the frequency.						
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test setup:	Reference Plane 40cm LISN AUX Equipment 40cm E.U.T Test table/Insulation plane 80cm 40cm LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:


Pre-scan all test modes, found worst case at 802.11a 5180MHz, and so only show the test result of it

Line:

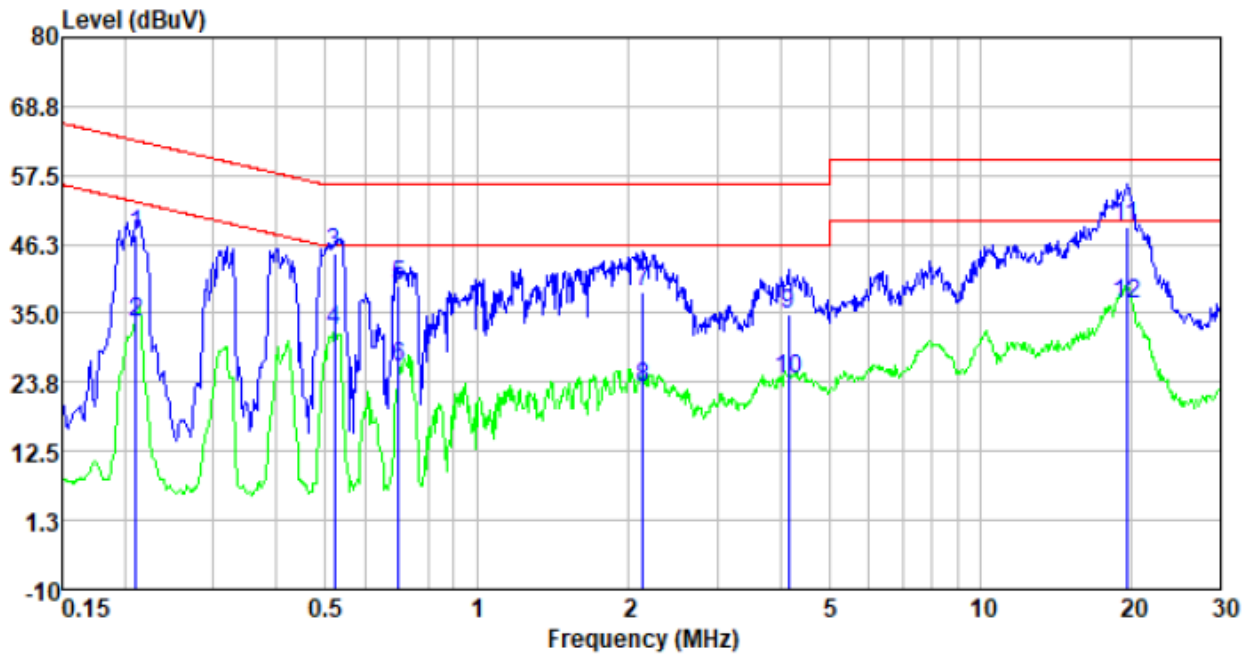

Freq	Reading	LISN/ISN	Cable		Limit	Over	
	level	factor	loss	Level	level	limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.21	28.34	9.55	0.01	47.90	63.18	-15.28	QP
0.21	13.96	9.55	0.01	33.52	53.18	-19.66	Average
0.52	25.02	9.81	0.01	44.84	56.00	-11.16	QP
0.52	12.31	9.81	0.01	32.13	46.00	-13.87	Average
0.70	19.70	9.75	0.02	39.47	56.00	-16.53	QP
0.70	6.41	9.75	0.02	26.18	46.00	-19.82	Average
2.13	18.63	9.79	0.05	38.47	56.00	-17.53	QP
2.13	3.15	9.79	0.05	22.99	46.00	-23.01	Average
4.16	15.43	9.46	0.06	34.95	56.00	-21.05	QP
4.16	4.71	9.46	0.06	24.23	46.00	-21.77	Average
19.53	29.31	9.75	0.18	49.24	60.00	-10.76	QP
19.53	16.61	9.75	0.18	36.54	50.00	-13.46	Average


Neutral:

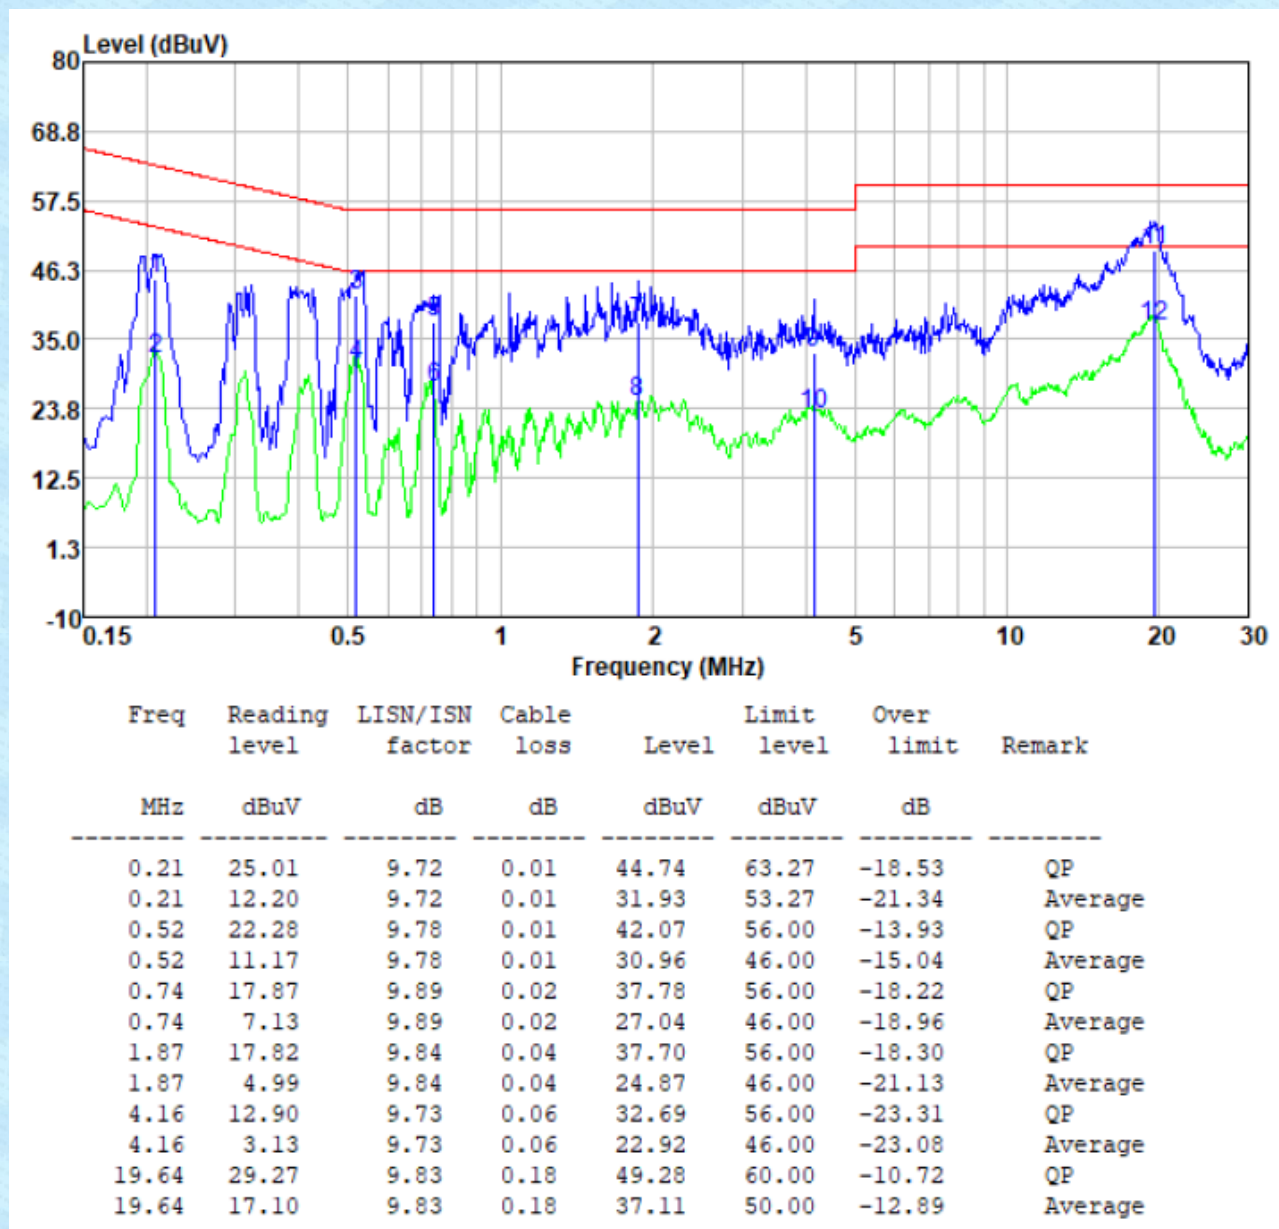

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth

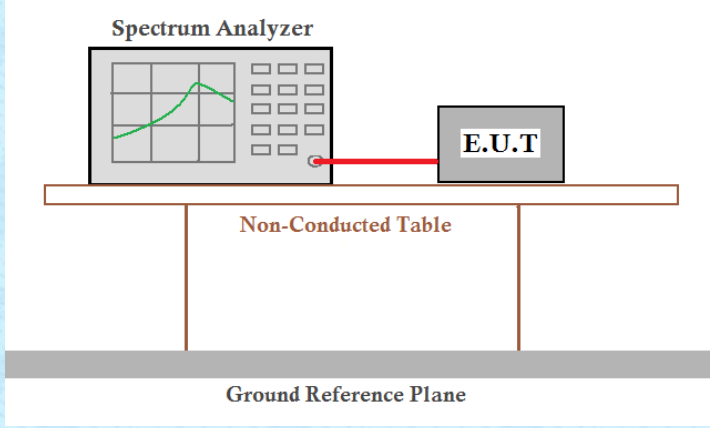Test Requirement :	FCC Part15 E Section 15.407
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a white rectangular table labeled 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a grey horizontal bar labeled 'Ground Reference Plane'.
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix.

7.4 Maximum Conducted Output Power

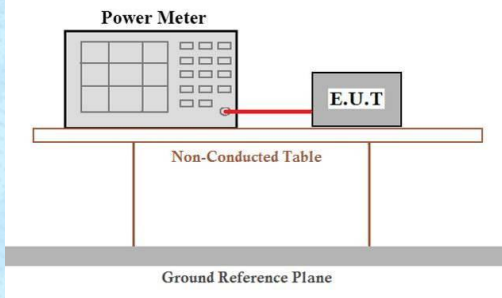Test Requirement	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
		$\leq 250\text{Mw}(23.98\text{dBm})$ for client device
	5250-5350	$\leq 250\text{Mw}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
	5470-5725	$\leq 250\text{Mw}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
Remark: *Where B is the 26Db emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
Test setup:		
Duty Cycle set up:	RBW=VBW=8MHz	
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10\log(1/0.25)$ if the duty cycle is 25 percent).	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix.


7.5 Power Spectral Density

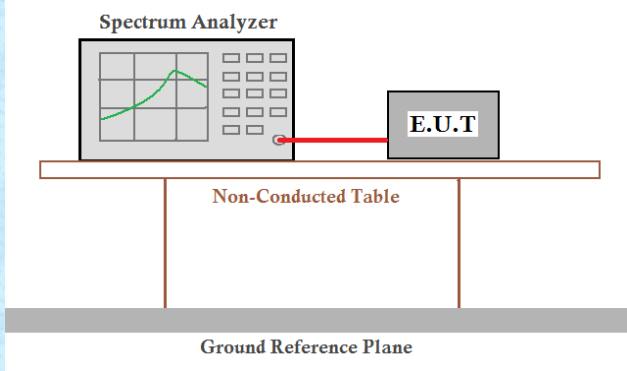Test Requirement:	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm in 1MHz for master device
		≤11dBm in 1MHz for client device
	5250-5350	≤11dBm in 1MHz for client device
	5470-5725	≤11dBm in 1MHz for client device
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.		
Test setup:		
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix.

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205				
Test Method:	ANSI C63.10:2013				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:					
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:					
	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			68.2		Peak Value
	Undesirable emission limits:				
	(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.				
(2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.					
(3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data				

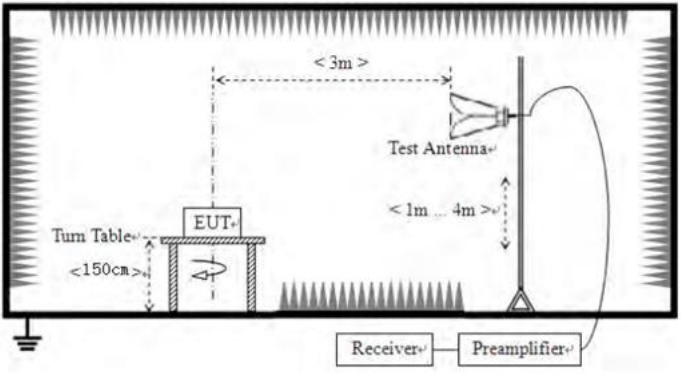	sheet.
Test setup:	For radiated emissions above 1GHz 
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
4. According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
For example, if $EIRP = -27dBm$
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$

Measurement Data:

Worse case mode:		802.11a		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.86	-3.63	46.23	68.2	-21.97	peak	H
5150	43.31	-3.63	39.68	54	-14.32	AVG	H
5150	52.35	-3.63	48.72	68.2	-19.48	peak	V
5150	41.86	-3.63	38.23	54	-15.77	AVG	V
Worse case mode:		802.11a		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	51.08	-3.59	47.49	68.2	-20.71	peak	H
5350	42.70	-3.59	39.11	54	-14.89	AVG	H
5350	45.99	-3.59	42.40	68.2	-25.80	peak	V
5350	41.12	-3.59	37.53	54	-16.47	AVG	V
Worse case mode:		802.11a		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	51.13	-3.54	47.59	68.2	-20.61	peak	H
5460	41.69	-3.54	38.15	54	-15.85	AVG	H
5460	46.89	-3.54	43.35	68.2	-24.85	peak	V
5460	41.26	-3.54	37.72	54	-16.28	AVG	V
Worse case mode:		802.11a		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	45.98	-3.45	42.53	68.2	-25.67	peak	H
5725	41.04	-3.45	37.59	54	-16.41	AVG	H
5725	49.18	-3.45	45.73	68.2	-22.47	peak	V
5725	41.75	-3.45	38.30	54	-15.70	AVG	V

Worse case mode:		802.11n(HT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.89	-3.63	46.26	68.2	-21.94	peak	H
5150	43.35	-3.63	39.72	54	-14.28	AVG	H
5150	52.38	-3.63	48.75	68.2	-19.45	peak	V
5150	41.91	-3.63	38.28	54	-15.72	AVG	V
Worse case mode:		802.11n(HT20)		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	51.10	-3.59	47.51	68.2	-20.69	peak	H
5350	42.72	-3.59	39.13	54	-14.87	AVG	H
5350	46.01	-3.59	42.42	68.2	-25.78	peak	V
5350	41.14	-3.59	37.55	54	-16.45	AVG	V
Worse case mode:		802.11n(HT20)		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	51.17	-3.54	47.63	68.2	-20.57	peak	H
5460	41.72	-3.54	38.18	54	-15.82	AVG	H
5460	46.93	-3.54	43.39	68.2	-24.81	peak	V
5460	41.29	-3.54	37.75	54	-16.25	AVG	V
Worse case mode:		802.11n(HT20)		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	46.00	-3.45	42.55	68.2	-25.65	peak	H
5725	41.06	-3.45	37.61	54	-16.39	AVG	H
5725	49.20	-3.45	45.75	68.2	-22.45	peak	V
5725	41.77	-3.45	38.32	54	-15.68	AVG	V

Worse case mode:		802.11n(HT40)		Test Frequency:		5190MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.50	-3.63	45.87	68.2	-22.33	peak	H
5150	42.83	-3.63	39.20	54	-14.80	AVG	H
5150	51.96	-3.63	48.33	68.2	-19.87	peak	V
5150	41.29	-3.63	37.66	54	-16.34	AVG	V
Worse case mode:		802.11n(HT40)		Test Frequency:		5310MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.82	-3.59	47.23	68.2	-20.97	peak	H
5350	42.41	-3.59	38.82	54	-15.18	AVG	H
5350	45.70	-3.59	42.11	68.2	-26.09	peak	V
5350	40.80	-3.59	37.21	54	-16.79	AVG	V
Worse case mode:		802.11n(HT40)		Test Frequency:		5510MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	50.62	-3.54	47.08	68.2	-21.12	peak	H
5460	41.29	-3.54	37.75	54	-16.25	AVG	H
5460	46.30	-3.54	42.76	68.2	-25.44	peak	V
5460	40.79	-3.54	37.25	54	-16.75	AVG	V
Worse case mode:		802.11n(HT40)		Test Frequency:		5670MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	45.67	-3.45	42.22	68.2	-25.98	peak	H
5725	40.80	-3.45	37.35	54	-16.65	AVG	H
5725	48.84	-3.45	45.39	68.2	-22.81	peak	V
5725	41.49	-3.45	38.04	54	-15.96	AVG	V

Worse case mode:		802.11ac(HT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.43	-3.63	45.80	68.2	-22.40	peak	H
5150	42.73	-3.63	39.10	54	-14.90	AVG	H
5150	51.89	-3.63	48.26	68.2	-19.94	peak	V
5150	41.17	-3.63	37.54	54	-16.46	AVG	V
Worse case mode:		802.11ac(HT20)		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.77	-3.59	47.18	68.2	-21.02	peak	H
5350	42.35	-3.59	38.76	54	-15.24	AVG	H
5350	45.65	-3.59	42.06	68.2	-26.14	peak	V
5350	40.73	-3.59	37.14	54	-16.86	AVG	V
Worse case mode:		802.11ac		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	50.52	-3.54	46.98	68.2	-21.22	peak	H
5460	41.22	-3.54	37.68	54	-16.32	AVG	H
5460	46.19	-3.54	42.65	68.2	-25.55	peak	V
5460	40.70	-3.54	37.16	54	-16.84	AVG	V
Worse case mode:		802.11ac		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	45.61	-3.45	42.16	68.2	-26.04	peak	H
5725	40.75	-3.45	37.30	54	-16.70	AVG	H
5725	48.77	-3.45	45.32	68.2	-22.88	peak	V
5725	41.44	-3.45	37.99	54	-16.01	AVG	V

Worse case mode:		802.11ac(VHT40)		Test Frequency:		5190MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	51.42	-3.63	47.79	68.2	-20.41	peak	H
5150	36.78	-3.63	33.15	54	-20.85	AVG	H
5150	46.52	-3.63	42.89	68.2	-25.31	peak	V
5150	38.52	-3.63	34.89	54	-19.11	AVG	V
Worse case mode:		802.11ac(VHT40)		Test Frequency:		5310MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	47.71	-3.59	44.12	68.2	-24.08	peak	H
5350	38.14	-3.59	34.55	54	-19.45	AVG	H
5350	50.46	-3.59	46.87	68.2	-21.33	peak	V
5350	36.51	-3.59	32.92	54	-21.08	AVG	V
Worse case mode:		802.11ac(VHT40)		Test Frequency:		5510MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	46.83	-3.54	43.29	68.2	-24.91	peak	H
5460	39.61	-3.54	36.07	54	-17.93	AVG	H
5460	50.06	-3.54	46.52	68.2	-21.68	peak	V
5460	40.37	-3.54	36.83	54	-17.17	AVG	V
Worse case mode:		802.11ac(VHT40)		Test Frequency:		5670MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	49.83	-3.45	46.38	68.2	-21.82	peak	H
5725	41.88	-3.45	38.43	54	-15.57	AVG	H
5725	50.39	-3.45	46.94	68.2	-21.26	peak	V
5725	37.97	-3.45	34.52	54	-19.48	AVG	V

Worse case mode:		802.11ac(VHT80)		Test Frequency:		5210MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	48.05	-3.63	44.42	68.2	-23.78	peak	H
5150	37.26	-3.63	33.63	54	-20.37	AVG	H
5150	51.95	-3.63	48.32	68.2	-19.88	peak	V
5150	37.26	-3.63	33.63	54	-20.37	AVG	V
5350	45.80	-3.59	42.21	68.2	-25.99	peak	H
5350	42.73	-3.59	39.14	54	-14.86	AVG	H
5350	52.41	-3.59	48.82	68.2	-19.38	peak	V
5350	38.79	-3.59	35.20	54	-18.80	AVG	V
Worse case mode:		802.11ac(VHT80)		Test Frequency:		5610MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	48.30	-3.54	44.76	68.2	-23.44	peak	H
5460	38.65	-3.54	35.11	54	-18.89	AVG	H
5460	47.76	-3.54	44.22	68.2	-23.98	peak	V
5460	39.92	-3.54	36.38	54	-17.62	AVG	V
5725	48.22	-3.45	44.77	68.2	-23.43	peak	H
5725	38.71	-3.45	35.26	54	-18.74	AVG	H
5725	48.46	-3.45	45.01	68.2	-23.19	peak	V
5725	38.60	-3.45	35.15	54	-18.85	AVG	V
Worse case mode:		802.11ax(HE20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.51	-3.63	45.88	68.2	-22.32	peak	H
5150	42.81	-3.63	39.18	54	-14.82	AVG	H
5150	51.94	-3.63	48.31	68.2	-19.89	peak	V
5150	41.27	-3.63	37.64	54	-16.36	AVG	V


Worse case mode:		802.11ax(HE20)		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.81	-3.59	47.22	68.2	-20.98	peak	H
5350	42.38	-3.59	38.79	54	-15.21	AVG	H
5350	45.68	-3.59	42.09	68.2	-26.11	peak	V
5350	40.77	-3.59	37.18	54	-16.82	AVG	V
Worse case mode:		802.11ax(HE20)		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	50.60	-3.54	47.06	68.2	-21.14	peak	H
5460	41.27	-3.54	37.73	54	-16.27	AVG	H
5460	46.27	-3.54	42.73	68.2	-25.47	peak	V
5460	40.76	-3.54	37.22	54	-16.78	AVG	V
Worse case mode:		802.11ax(HE20)		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	45.65	-3.45	42.20	68.2	-26.00	peak	H
5725	40.78	-3.45	37.33	54	-16.67	AVG	H
5725	48.81	-3.45	45.36	68.2	-22.84	peak	V
5725	41.48	-3.45	38.03	54	-15.97	AVG	V


Worse case mode:		802.11ax(HE40)		Test Frequency:		5190MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	52.39	-3.63	48.76	68.2	-19.44	peak	H
5150	36.77	-3.63	33.14	54	-20.86	AVG	H
5150	46.31	-3.63	42.68	68.2	-25.52	peak	V
5150	37.76	-3.63	34.13	54	-19.87	AVG	V
Worse case mode:		802.11ax(HE40)		Test Frequency:		5310MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	48.94	-3.59	45.35	68.2	-22.85	peak	H
5350	38.80	-3.59	35.21	54	-18.79	AVG	H
5350	50.33	-3.59	46.74	68.2	-21.46	peak	V
5350	35.70	-3.59	32.11	54	-21.89	AVG	V
Worse case mode:		802.11ax(HE40)		Test Frequency:		5510MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	46.61	-3.54	43.07	68.2	-25.13	peak	H
5460	39.63	-3.54	36.09	54	-17.91	AVG	H
5460	49.59	-3.54	46.05	68.2	-22.15	peak	V
5460	40.12	-3.54	36.58	54	-17.42	AVG	V
Worse case mode:		802.11ax(HE40)		Test Frequency:		5670MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	48.52	-3.45	45.07	68.2	-23.13	peak	H
5725	41.88	-3.45	38.43	54	-15.57	AVG	H
5725	50.38	-3.45	46.93	68.2	-21.27	peak	V
5725	37.97	-3.45	34.52	54	-19.48	AVG	V

Worse case mode:		802.11ax(HE80)		Test Frequency:		5210MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	48.05	-3.63	44.42	68.2	-23.78	peak	H
5150	37.26	-3.63	33.63	54	-20.37	AVG	H
5150	51.95	-3.63	48.32	68.2	-19.88	peak	V
5150	37.26	-3.63	33.63	54	-20.37	AVG	V
5350	45.80	-3.59	42.21	68.2	-25.99	peak	H
5350	42.74	-3.59	39.15	54	-14.85	AVG	H
5350	52.41	-3.59	48.82	68.2	-19.38	peak	V
5350	38.79	-3.59	35.20	54	-18.80	AVG	V
Worse case mode:		802.11ax(HE80)		Test Frequency:		5610MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	48.30	-3.54	44.76	68.2	-23.44	peak	H
5460	38.66	-3.54	35.12	54	-18.88	AVG	H
5460	47.76	-3.54	44.22	68.2	-23.98	peak	V
5460	39.92	-3.54	36.38	54	-17.62	AVG	V
5725	48.27	-3.45	44.82	68.2	-23.38	peak	H
5725	38.72	-3.45	35.27	54	-18.73	AVG	H
5725	48.47	-3.45	45.02	68.2	-23.18	peak	V
5725	38.57	-3.45	35.12	54	-18.88	AVG	V


7.7 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205				
Test Method :	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
	Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T				
Limit:					
	Frequency (MHz)	Field strength (microvolts/meter)		Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)		300	
	0.490-1.705	24000/F(kHz)		30	
	1.705-30.0	30		30	
	30-88	100**		3	
	88-216	150**		3	
	216-960	200**		3	
	Above 960	500		3	
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.				
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that				

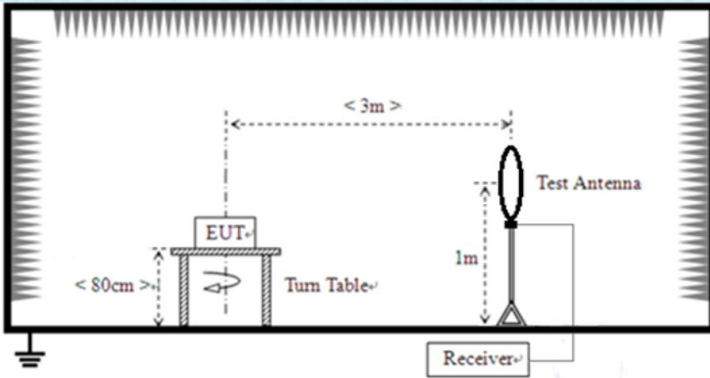	did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $EIRP(dBm) = P_g(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: P_g is the generator output power into the substitution antenna.
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz

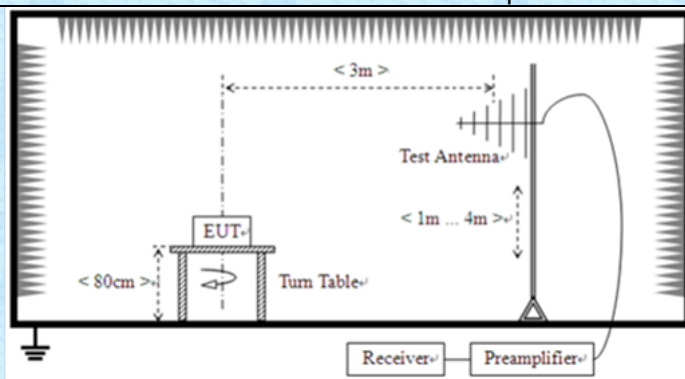

For radiated emissions above 1GHz

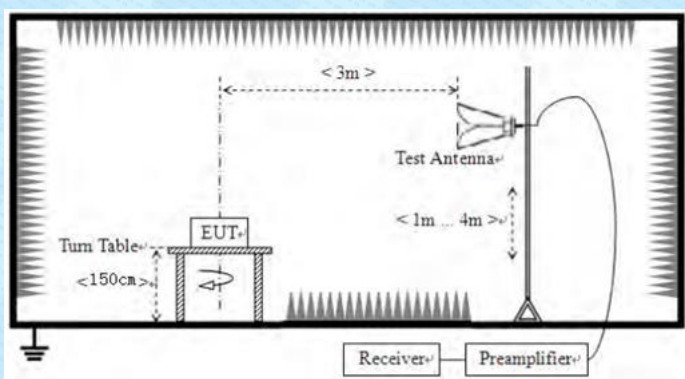

Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


30MHz~ 1GHz

Pre-scan all test modes, found worst case at 802.11a 5180MHz, and so only show the test result of it

Horizontal:

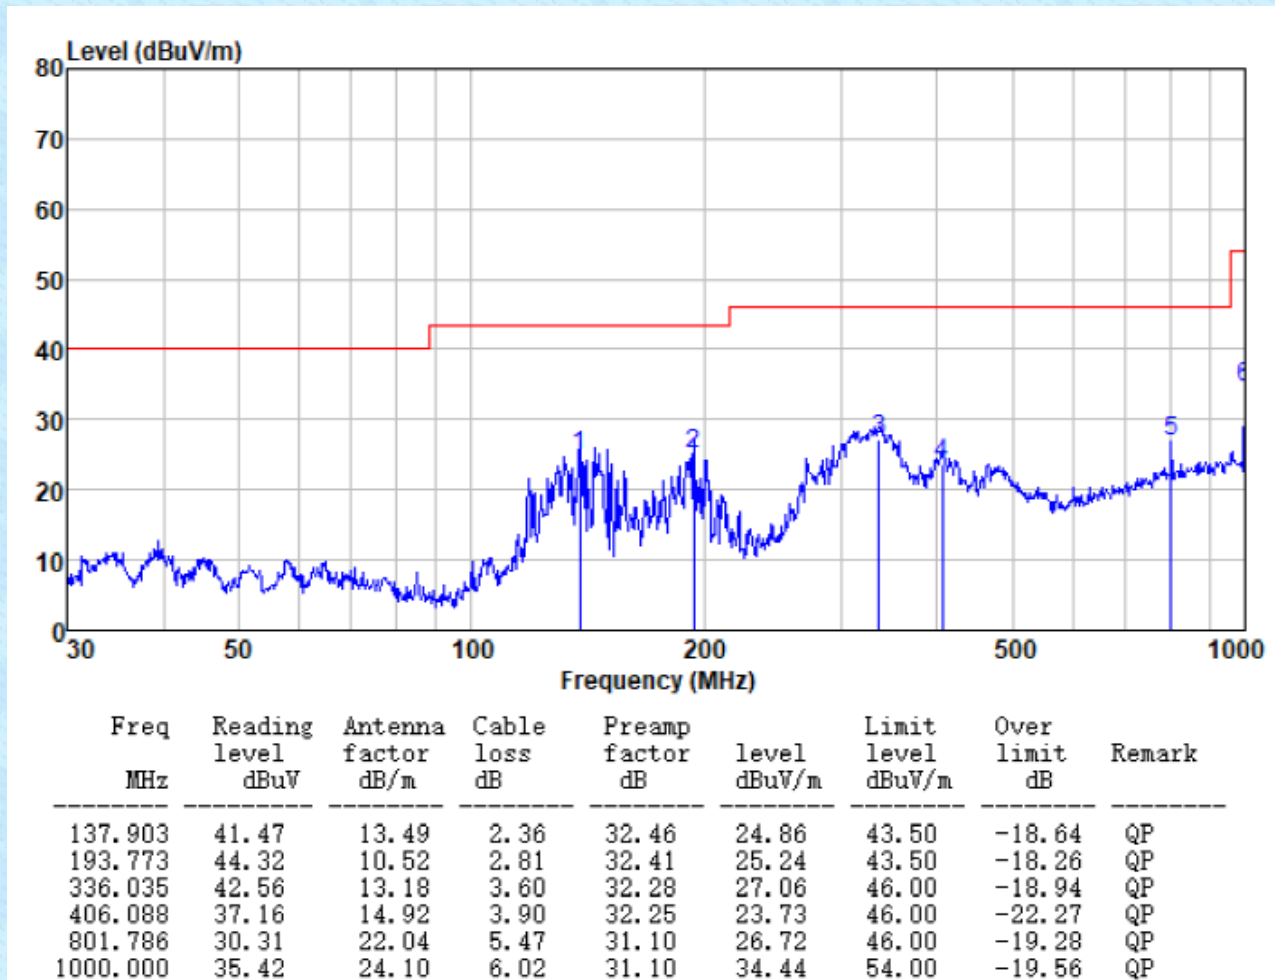

Vertical:

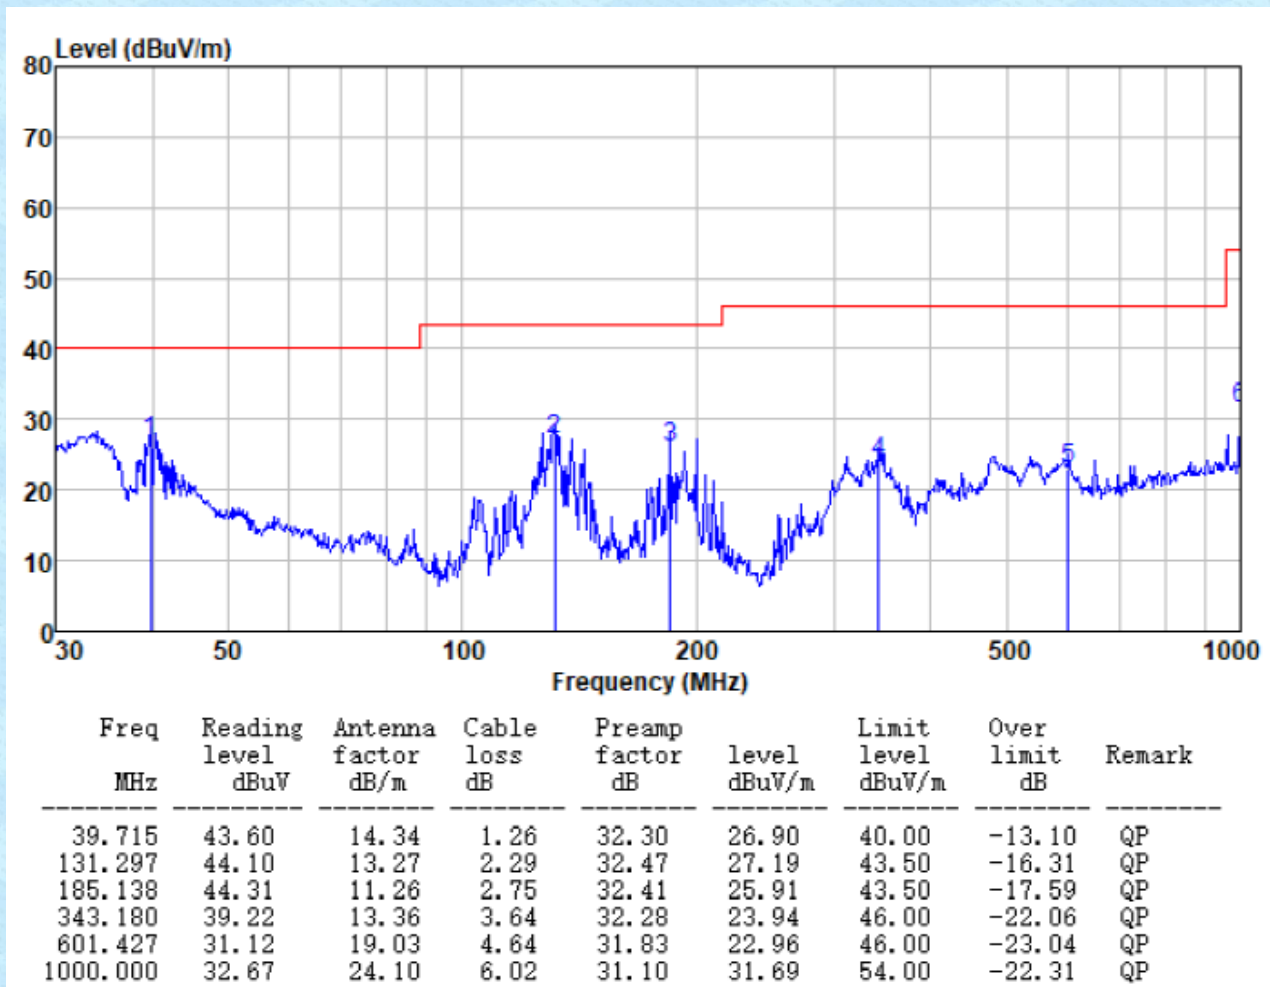

Above 1GHz:

802.11a					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	35.53	38.96	8.27	35.64	47.12	68.2	-21.08	Vertical
15540	34.46	38.4	10.57	35.35	48.08	68.2	-20.12	Vertical
10360	36.15	38.96	8.27	35.64	47.74	68.2	-20.46	Horizontal
15540	33.46	38.4	10.57	35.35	47.08	68.2	-21.12	Horizontal
10360	27.21	38.96	8.27	35.64	38.80	54	-15.20	Vertical
15540	28.19	38.4	10.57	35.35	41.81	54	-12.19	Vertical
10360	27.44	38.96	8.27	35.64	39.03	54	-14.97	Horizontal
15540	27.59	38.4	10.57	35.35	41.21	54	-12.79	Horizontal
802.11a					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	35.94	39.01	8.29	35.67	47.57	68.2	-20.63	Vertical
15600	33.07	38.3	10.62	35.36	46.63	68.2	-21.57	Vertical
10400	36.62	39.01	8.29	35.67	48.25	68.2	-19.95	Horizontal
15600	32.31	38.3	10.62	35.36	45.87	68.2	-22.33	Horizontal
10400	26.11	39.01	8.29	35.67	37.74	54	-16.26	Vertical
15600	25.98	38.3	10.62	35.36	39.54	54	-14.46	Vertical
10400	24.81	39.01	8.29	35.67	36.44	54	-17.56	Horizontal
15600	25.07	38.3	10.62	35.36	38.63	54	-15.37	Horizontal

802.11a					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	38.36	39.15	8.32	35.78	50.05	68.2	-18.15	Vertical
15720	33.50	38	10.72	35.37	46.85	68.2	-21.35	Vertical
10480	33.71	39.15	8.32	35.78	45.40	68.2	-22.80	Horizontal
15720	31.57	38	10.72	35.37	44.92	68.2	-23.28	Horizontal
10480	29.08	39.15	8.32	35.78	40.77	54	-13.23	Vertical
15720	27.16	38	10.72	35.37	40.51	54	-13.49	Vertical
10480	24.89	39.15	8.32	35.78	36.58	54	-17.42	Horizontal
15720	26.89	38	10.72	35.37	40.24	54	-13.76	Horizontal
802.11a					Test Frequency: 5260MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	36.83	39.2	8.34	35.82	48.55	68.2	-19.65	Vertical
15780	32.09	37.9	10.77	35.38	45.38	68.2	-22.82	Vertical
10520	36.30	39.2	8.34	35.82	48.02	68.2	-20.18	Horizontal
15780	30.82	37.9	10.77	35.38	44.11	68.2	-24.09	Horizontal
10520	29.89	39.2	8.34	35.82	41.61	54	-12.39	Vertical
15780	28.85	37.9	10.77	35.38	42.14	54	-11.86	Vertical
10520	26.54	39.2	8.34	35.82	38.26	54	-15.74	Horizontal
15780	25.52	37.9	10.77	35.38	38.81	54	-15.19	Horizontal

802.11a					Test Frequency: 5280MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560	34.20	38.86	8.35	39.35	42.06	68.2	-26.14	Vertical
15840	36.00	38.2	10.82	39.6	45.42	68.2	-22.78	Vertical
10560	36.22	38.86	8.35	39.35	44.08	68.2	-24.12	Horizontal
15840	33.60	38.2	10.82	39.6	43.02	68.2	-25.18	Horizontal
10560	30.79	38.86	8.35	39.35	38.65	54	-15.35	Vertical
15840	25.95	38.2	10.82	39.6	35.37	54	-18.63	Vertical
10560	26.47	38.86	8.35	39.35	34.33	54	-19.67	Horizontal
15840	24.90	38.2	10.82	39.6	34.32	54	-19.68	Horizontal
802.11a					Test Frequency: 5320MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	37.16	39.22	8.38	35.96	48.80	68.2	-19.40	Vertical
15960	34.10	37.5	10.92	35.4	47.12	68.2	-21.08	Vertical
10640	36.17	39.22	8.38	35.96	47.81	68.2	-20.39	Horizontal
15960	31.29	37.5	10.92	35.4	44.31	68.2	-23.89	Horizontal
10640	26.72	39.22	8.38	35.96	38.36	54	-15.64	Vertical
15960	27.96	37.5	10.92	35.4	40.98	54	-13.02	Vertical
10640	27.61	39.22	8.38	35.96	39.25	54	-14.75	Horizontal
15960	23.49	37.5	10.92	35.4	36.51	54	-17.49	Horizontal

802.11a					Test Frequency: 5500MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	34.63	39.3	8.53	36.4	46.06	68.2	-22.14	Vertical
16500	34.43	39.3	11.06	35.87	48.92	68.2	-19.28	Vertical
11000	35.78	39.3	8.53	36.4	47.21	68.2	-20.99	Horizontal
16500	34.56	39.3	11.06	35.87	49.05	68.2	-19.15	Horizontal
11000	29.19	39.3	8.53	36.4	40.62	54	-13.38	Vertical
16500	28.76	39.3	11.06	35.87	43.25	54	-10.75	Vertical
11000	28.93	39.3	8.53	36.4	40.36	54	-13.64	Horizontal
16500	26.78	39.3	11.06	35.87	41.27	54	-12.73	Horizontal
802.11a					Test Frequency: 5580MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	34.94	39.33	8.6	36.37	46.50	68.2	-21.70	Vertical
16740	35.61	39.5	11.11	36.09	50.13	68.2	-18.07	Vertical
11160	33.23	39.33	8.6	36.37	44.79	68.2	-23.41	Horizontal
16740	32.21	39.5	11.11	36.09	46.73	68.2	-21.47	Horizontal
11160	27.68	39.33	8.6	36.37	39.24	54	-14.76	Vertical
16740	28.23	39.5	11.11	36.09	42.75	54	-11.25	Vertical
11160	28.79	39.33	8.6	36.37	40.35	54	-13.65	Horizontal
16740	24.08	39.5	11.11	36.09	38.60	54	-15.40	Horizontal

802.11a					Test Frequency: 5700MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	34.84	39.38	8.7	36.32	46.60	68.2	-21.60	Vertical
17100	32.54	40.22	11.26	36.29	47.73	68.2	-20.47	Vertical
11400	35.32	39.38	8.7	36.32	47.08	68.2	-21.12	Horizontal
17100	31.55	40.22	11.26	36.29	46.74	68.2	-21.46	Horizontal
11400	28.40	39.38	8.7	36.32	40.16	54	-13.84	Vertical
17100	25.27	40.22	11.26	36.29	40.46	54	-13.54	Vertical
11400	25.45	39.38	8.7	36.32	37.21	54	-16.79	Horizontal
17100	25.78	40.22	11.26	36.29	40.97	54	-13.03	Horizontal

802.11n(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	35.13	38.96	8.27	35.64	46.72	68.2	-21.48	Vertical
15540	34.15	38.4	10.57	35.35	47.77	68.2	-20.43	Vertical
10360	35.84	38.96	8.27	35.64	47.43	68.2	-20.77	Horizontal
15540	32.62	38.4	10.57	35.35	46.24	68.2	-21.96	Horizontal
10360	26.77	38.96	8.27	35.64	38.36	54	-15.64	Vertical
15540	27.75	38.4	10.57	35.35	41.37	54	-12.63	Vertical
10360	27.14	38.96	8.27	35.64	38.73	54	-15.27	Horizontal
15540	27.22	38.4	10.57	35.35	40.84	54	-13.16	Horizontal
802.11n(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	35.69	39.01	8.29	35.67	47.32	68.2	-20.88	Vertical
15600	32.77	38.3	10.62	35.36	46.33	68.2	-21.87	Vertical
10400	36.33	39.01	8.29	35.67	47.96	68.2	-20.24	Horizontal
15600	31.94	38.3	10.62	35.36	45.50	68.2	-22.70	Horizontal
10400	25.59	39.01	8.29	35.67	37.22	54	-16.78	Vertical
15600	25.65	38.3	10.62	35.36	39.21	54	-14.79	Vertical
10400	24.42	39.01	8.29	35.67	36.05	54	-17.95	Horizontal
15600	24.67	38.3	10.62	35.36	38.23	54	-15.77	Horizontal

802.11n(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	37.66	39.15	8.32	35.78	49.35	68.2	-18.85	Vertical
15720	33.10	38	10.72	35.37	46.45	68.2	-21.75	Vertical
10480	33.37	39.15	8.32	35.78	45.06	68.2	-23.14	Horizontal
15720	31.03	38	10.72	35.37	44.38	68.2	-23.82	Horizontal
10480	28.72	39.15	8.32	35.78	40.41	54	-13.59	Vertical
15720	26.72	38	10.72	35.37	40.07	54	-13.93	Vertical
10480	24.17	39.15	8.32	35.78	35.86	54	-18.14	Horizontal
15720	26.61	38	10.72	35.37	39.96	54	-14.04	Horizontal
802.11n(HT20)					Test Frequency: 5260MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	36.89	39.2	8.34	35.82	48.61	68.2	-19.59	Vertical
15780	31.71	37.9	10.77	35.38	45.00	68.2	-23.20	Vertical
10520	36.00	39.2	8.34	35.82	47.72	68.2	-20.48	Horizontal
15780	30.06	37.9	10.77	35.38	43.35	68.2	-24.85	Horizontal
10520	29.39	39.2	8.34	35.82	41.11	54	-12.89	Vertical
15780	28.49	37.9	10.77	35.38	41.78	54	-12.22	Vertical
10520	26.09	39.2	8.34	35.82	37.81	54	-16.19	Horizontal
15780	25.06	37.9	10.77	35.38	38.35	54	-15.65	Horizontal

802.11n(HT20)					Test Frequency: 5280MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560	33.73	38.86	8.35	39.35	41.59	68.2	-26.61	Vertical
15840	35.65	38.2	10.82	39.6	45.07	68.2	-23.13	Vertical
10560	35.85	38.86	8.35	39.35	43.71	68.2	-24.49	Horizontal
15840	33.20	38.2	10.82	39.6	42.62	68.2	-25.58	Horizontal
10560	30.26	38.86	8.35	39.35	38.12	54	-15.88	Vertical
15840	25.47	38.2	10.82	39.6	34.89	54	-19.11	Vertical
10560	26.11	38.86	8.35	39.35	33.97	54	-20.03	Horizontal
15840	24.60	38.2	10.82	39.6	34.02	54	-19.98	Horizontal
802.11n(HT20)					Test Frequency: 5320MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	36.60	39.22	8.38	35.96	48.24	68.2	-19.96	Vertical
15960	33.80	37.5	10.92	35.4	46.82	68.2	-21.38	Vertical
10640	35.82	39.22	8.38	35.96	47.46	68.2	-20.74	Horizontal
15960	30.94	37.5	10.92	35.4	43.96	68.2	-24.24	Horizontal
10640	26.17	39.22	8.38	35.96	37.81	54	-16.19	Vertical
15960	27.50	37.5	10.92	35.4	40.52	54	-13.48	Vertical
10640	27.48	39.22	8.38	35.96	39.12	54	-14.88	Horizontal
15960	23.11	37.5	10.92	35.4	36.13	54	-17.87	Horizontal

802.11n(HT20)					Test Frequency: 5500MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	33.82	39.3	8.53	36.4	45.25	68.2	-22.95	Vertical
16500	34.04	39.3	11.06	35.87	48.53	68.2	-19.67	Vertical
11000	35.45	39.3	8.53	36.4	46.88	68.2	-21.32	Horizontal
16500	34.02	39.3	11.06	35.87	48.51	68.2	-19.69	Horizontal
11000	28.87	39.3	8.53	36.4	40.30	54	-13.70	Vertical
16500	28.40	39.3	11.06	35.87	42.89	54	-11.11	Vertical
11000	28.37	39.3	8.53	36.4	39.80	54	-14.20	Horizontal
16500	26.40	39.3	11.06	35.87	40.89	54	-13.11	Horizontal
802.11n(HT20)					Test Frequency: 5580MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	34.58	39.33	8.6	36.37	46.14	68.2	-22.06	Vertical
16740	35.11	39.5	11.11	36.09	49.63	68.2	-18.57	Vertical
11160	32.75	39.33	8.6	36.37	44.31	68.2	-23.89	Horizontal
16740	31.88	39.5	11.11	36.09	46.40	68.2	-21.80	Horizontal
11160	27.43	39.33	8.6	36.37	38.99	54	-15.01	Vertical
16740	27.84	39.5	11.11	36.09	42.36	54	-11.64	Vertical
11160	28.40	39.33	8.6	36.37	39.96	54	-14.04	Horizontal
16740	23.68	39.5	11.11	36.09	38.20	54	-15.80	Horizontal

802.11n(HT20)					Test Frequency: 5700MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	34.65	39.38	8.7	36.32	46.41	68.2	-21.79	Vertical
17100	32.29	40.22	11.26	36.29	47.48	68.2	-20.72	Vertical
11400	34.96	39.38	8.7	36.32	46.72	68.2	-21.48	Horizontal
17100	31.09	40.22	11.26	36.29	46.28	68.2	-21.92	Horizontal
11400	27.96	39.38	8.7	36.32	39.72	54	-14.28	Vertical
17100	24.83	40.22	11.26	36.29	40.02	54	-13.98	Vertical
11400	25.05	39.38	8.7	36.32	36.81	54	-17.19	Horizontal
17100	25.03	40.22	11.26	36.29	40.22	54	-13.78	Horizontal
802.11n(HT40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	33.95	39.01	8.28	35.67	45.57	68.2	-22.63	Vertical
15570	34.38	38.3	10.6	35.36	47.92	68.2	-20.28	Vertical
10380	33.43	39.01	8.28	35.67	45.05	68.2	-23.15	Horizontal
15570	34.40	38.3	10.6	35.36	47.94	68.2	-20.26	Horizontal
10380	28.78	39.01	8.28	35.67	40.40	54	-13.60	Vertical
15570	27.17	38.3	10.6	35.36	40.71	54	-13.29	Vertical
10380	27.74	39.01	8.28	35.67	39.36	54	-14.64	Horizontal
15570	24.44	38.3	10.6	35.36	37.98	54	-16.02	Horizontal

802.11n(HT40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	36.28	39.11	8.31	35.75	47.95	68.2	-20.25	Vertical
15690	33.85	38.1	10.7	35.37	47.28	68.2	-20.92	Vertical
10460	32.36	39.11	8.31	35.75	44.03	68.2	-24.17	Horizontal
15690	30.09	38.1	10.7	35.37	43.52	68.2	-24.68	Horizontal
10460	27.98	39.11	8.31	35.75	39.65	54	-14.35	Vertical
15690	25.23	38.1	10.7	35.37	38.66	54	-15.34	Vertical
10460	24.54	39.11	8.31	35.75	36.21	54	-17.79	Horizontal
15690	26.79	38.1	10.7	35.37	40.22	54	-13.78	Horizontal
802.11n(HT40)					Test Frequency: 5270MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540	35.69	39.21	8.34	35.85	47.39	68.2	-20.81	Vertical
15810	32.11	37.8	10.79	35.38	45.32	68.2	-22.88	Vertical
10540	35.18	39.21	8.34	35.85	46.88	68.2	-21.32	Horizontal
15810	31.72	37.8	10.79	35.38	44.93	68.2	-23.27	Horizontal
10540	30.12	39.21	8.34	35.85	41.82	54	-12.18	Vertical
15810	25.44	37.8	10.79	35.38	38.65	54	-15.35	Vertical
10540	23.36	39.21	8.34	35.85	35.06	54	-18.94	Horizontal
15810	26.04	37.8	10.79	35.38	39.25	54	-14.75	Horizontal

802.11n(HT40)					Test Frequency: 5310MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620	33.60	39.22	8.38	35.93	45.27	68.2	-22.93	Vertical
15930	30.40	37.5	10.89	35.4	43.39	68.2	-24.81	Vertical
10620	35.40	39.22	8.38	35.93	47.07	68.2	-21.13	Horizontal
15930	32.21	37.5	10.89	35.4	45.20	68.2	-23.00	Horizontal
10620	28.46	39.22	8.38	35.93	40.13	54	-13.87	Vertical
15930	25.66	37.5	10.89	35.4	38.65	54	-15.35	Vertical
10620	25.24	39.22	8.38	35.93	36.91	54	-17.09	Horizontal
15930	26.77	37.5	10.89	35.4	39.76	54	-14.24	Horizontal
802.11n(HT40)					Test Frequency: 5510MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020	36.83	39.3	8.54	36.4	48.27	68.2	-19.93	Vertical
16530	31.44	39.34	11.07	35.91	45.94	68.2	-22.26	Vertical
11020	34.39	39.3	8.54	36.4	45.83	68.2	-22.37	Horizontal
16530	33.91	39.34	11.07	35.91	48.41	68.2	-19.79	Horizontal
11020	29.62	39.3	8.54	36.4	41.06	54	-12.94	Vertical
16530	28.83	39.34	11.07	35.91	43.33	54	-10.67	Vertical
11020	25.67	39.3	8.54	36.4	37.11	54	-16.89	Horizontal
16530	25.03	39.34	11.07	35.91	39.53	54	-14.47	Horizontal

802.11n(HT40)					Test Frequency: 5550MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11100	35.96	39.32	8.57	36.38	47.47	68.2	-20.73	Vertical
16650	34.43	39.42	11.1	36	48.95	68.2	-19.25	Vertical
11100	33.20	39.32	8.57	36.38	44.71	68.2	-23.49	Horizontal
16650	32.18	39.42	11.1	36	46.70	68.2	-21.50	Horizontal
11100	26.83	39.32	8.57	36.38	38.34	54	-15.66	Vertical
16650	28.08	39.42	11.1	36	42.60	54	-11.40	Vertical
11100	24.35	39.32	8.57	36.38	35.86	54	-18.14	Horizontal
16650	27.04	39.42	11.1	36	41.56	54	-12.44	Horizontal
802.11n(HT40)					Test Frequency: 5670MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340	37.00	39.37	8.67	36.33	48.71	68.2	-19.49	Vertical
17010	33.56	39.7	11.18	36.3	48.14	68.2	-20.06	Vertical
11340	33.43	39.37	8.67	36.33	45.14	68.2	-23.06	Horizontal
17010	30.48	39.7	11.18	36.3	45.06	68.2	-23.14	Horizontal
11340	29.07	39.37	8.67	36.33	40.78	54	-13.22	Vertical
17010	28.61	39.7	11.18	36.3	43.19	54	-10.81	Vertical
11340	27.04	39.37	8.67	36.33	38.75	54	-15.25	Horizontal
17010	26.16	39.7	11.18	36.3	40.74	54	-13.26	Horizontal

802.11ac(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	35.52	38.96	8.27	35.64	47.11	68.2	-21.09	Vertical
15540	34.44	38.4	10.57	35.35	48.06	68.2	-20.14	Vertical
10360	36.12	38.96	8.27	35.64	47.71	68.2	-20.49	Horizontal
15540	32.96	38.4	10.57	35.35	46.58	68.2	-21.62	Horizontal
10360	27.05	38.96	8.27	35.64	38.64	54	-15.36	Vertical
15540	28.00	38.4	10.57	35.35	41.62	54	-12.38	Vertical
10360	27.51	38.96	8.27	35.64	39.10	54	-14.90	Horizontal
15540	27.51	38.4	10.57	35.35	41.13	54	-12.87	Horizontal
802.11ac(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.49	39.01	8.29	35.67	48.12	68.2	-20.08	Vertical
15600	33.02	38.3	10.62	35.36	46.58	68.2	-21.62	Vertical
10400	36.56	39.01	8.29	35.67	48.19	68.2	-20.01	Horizontal
15600	32.22	38.3	10.62	35.36	45.78	68.2	-22.42	Horizontal
10400	25.84	39.01	8.29	35.67	37.47	54	-16.53	Vertical
15600	25.86	38.3	10.62	35.36	39.42	54	-14.58	Vertical
10400	24.66	39.01	8.29	35.67	36.29	54	-17.71	Horizontal
15600	24.89	38.3	10.62	35.36	38.45	54	-15.55	Horizontal

802.11ac(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	37.96	39.15	8.32	35.78	49.65	68.2	-18.55	Vertical
15720	33.32	38	10.72	35.37	46.67	68.2	-21.53	Vertical
10480	33.57	39.15	8.32	35.78	45.26	68.2	-22.94	Horizontal
15720	31.28	38	10.72	35.37	44.63	68.2	-23.57	Horizontal
10480	28.94	39.15	8.32	35.78	40.63	54	-13.37	Vertical
15720	26.90	38	10.72	35.37	40.25	54	-13.75	Vertical
10480	24.47	39.15	8.32	35.78	36.16	54	-17.84	Horizontal
15720	26.83	38	10.72	35.37	40.18	54	-13.82	Horizontal
802.11ac(HT20)					Test Frequency: 5260MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	36.87	39.2	8.34	35.82	48.59	68.2	-19.61	Vertical
15780	31.94	37.9	10.77	35.38	45.23	68.2	-22.97	Vertical
10520	36.20	39.2	8.34	35.82	47.92	68.2	-20.28	Horizontal
15780	30.27	37.9	10.77	35.38	43.56	68.2	-24.64	Horizontal
10520	29.59	39.2	8.34	35.82	41.31	54	-12.69	Vertical
15780	28.66	37.9	10.77	35.38	41.95	54	-12.05	Vertical
10520	26.30	39.2	8.34	35.82	38.02	54	-15.98	Horizontal
15780	25.24	37.9	10.77	35.38	38.53	54	-15.47	Horizontal

802.11ac(HT20)					Test Frequency: 5280MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560	34.00	38.86	8.35	39.35	41.86	68.2	-26.34	Vertical
15840	35.95	38.2	10.82	39.6	45.37	68.2	-22.83	Vertical
10560	36.12	38.86	8.35	39.35	43.98	68.2	-24.22	Horizontal
15840	33.45	38.2	10.82	39.6	42.87	68.2	-25.33	Horizontal
10560	30.53	38.86	8.35	39.35	38.39	54	-15.61	Vertical
15840	25.73	38.2	10.82	39.6	35.15	54	-18.85	Vertical
10560	26.41	38.86	8.35	39.35	34.27	54	-19.73	Horizontal
15840	24.86	38.2	10.82	39.6	34.28	54	-19.72	Horizontal
802.11ac(HT20)					Test Frequency: 5320MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	36.99	39.22	8.38	35.96	48.63	68.2	-19.57	Vertical
15960	34.00	37.5	10.92	35.4	47.02	68.2	-21.18	Vertical
10640	35.98	39.22	8.38	35.96	47.62	68.2	-20.58	Horizontal
15960	31.13	37.5	10.92	35.4	44.15	68.2	-24.05	Horizontal
10640	26.35	39.22	8.38	35.96	37.99	54	-16.01	Vertical
15960	27.65	37.5	10.92	35.4	40.67	54	-13.33	Vertical
10640	27.78	39.22	8.38	35.96	39.42	54	-14.58	Horizontal
15960	23.31	37.5	10.92	35.4	36.33	54	-17.67	Horizontal

802.11ac(HT20)					Test Frequency: 5500MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	34.11	39.3	8.53	36.4	45.54	68.2	-22.66	Vertical
16500	34.27	39.3	11.06	35.87	48.76	68.2	-19.44	Vertical
11000	35.64	39.3	8.53	36.4	47.07	68.2	-21.13	Horizontal
16500	34.24	39.3	11.06	35.87	48.73	68.2	-19.47	Horizontal
11000	29.06	39.3	8.53	36.4	40.49	54	-13.51	Vertical
16500	28.58	39.3	11.06	35.87	43.07	54	-10.93	Vertical
11000	28.58	39.3	8.53	36.4	40.01	54	-13.99	Horizontal
16500	26.57	39.3	11.06	35.87	41.06	54	-12.94	Horizontal
802.11ac(HT20)					Test Frequency: 5580MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	34.83	39.33	8.6	36.37	46.39	68.2	-21.81	Vertical
16740	35.41	39.5	11.11	36.09	49.93	68.2	-18.27	Vertical
11160	33.01	39.33	8.6	36.37	44.57	68.2	-23.63	Horizontal
16740	32.19	39.5	11.11	36.09	46.71	68.2	-21.49	Horizontal
11160	27.69	39.33	8.6	36.37	39.25	54	-14.75	Vertical
16740	28.07	39.5	11.11	36.09	42.59	54	-11.41	Vertical
11160	28.67	39.33	8.6	36.37	40.23	54	-13.77	Horizontal
16740	23.91	39.5	11.11	36.09	38.43	54	-15.57	Horizontal

802.11ac(HT20)					Test Frequency: 5700MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	34.93	39.38	8.7	36.32	46.69	68.2	-21.51	Vertical
17100	32.55	40.22	11.26	36.29	47.74	68.2	-20.46	Vertical
11400	35.16	39.38	8.7	36.32	46.92	68.2	-21.28	Horizontal
17100	31.32	40.22	11.26	36.29	46.51	68.2	-21.69	Horizontal
11400	28.18	39.38	8.7	36.32	39.94	54	-14.06	Vertical
17100	25.03	40.22	11.26	36.29	40.22	54	-13.78	Vertical
11400	25.26	39.38	8.7	36.32	37.02	54	-16.98	Horizontal
17100	25.25	40.22	11.26	36.29	40.44	54	-13.56	Horizontal
802.11ac(HT40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	34.13	39.01	8.28	35.67	45.75	68.2	-22.45	Vertical
15570	34.54	38.3	10.6	35.36	48.08	68.2	-20.12	Vertical
10380	33.58	39.01	8.28	35.67	45.20	68.2	-23.00	Horizontal
15570	34.56	38.3	10.6	35.36	48.10	68.2	-20.10	Horizontal
10380	28.92	39.01	8.28	35.67	40.54	54	-13.46	Vertical
15570	27.31	38.3	10.6	35.36	40.85	54	-13.15	Vertical
10380	27.90	39.01	8.28	35.67	39.52	54	-14.48	Horizontal
15570	24.59	38.3	10.6	35.36	38.13	54	-15.87	Horizontal

802.11ac(HT40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	36.44	39.11	8.31	35.75	48.11	68.2	-20.09	Vertical
15690	34.00	38.1	10.7	35.37	47.43	68.2	-20.77	Vertical
10460	32.54	39.11	8.31	35.75	44.21	68.2	-23.99	Horizontal
15690	30.26	38.1	10.7	35.37	43.69	68.2	-24.51	Horizontal
10460	28.14	39.11	8.31	35.75	39.81	54	-14.19	Vertical
15690	25.38	38.1	10.7	35.37	38.81	54	-15.19	Vertical
10460	24.71	39.11	8.31	35.75	36.38	54	-17.62	Horizontal
15690	26.95	38.1	10.7	35.37	40.38	54	-13.62	Horizontal
802.11ac(HT40)					Test Frequency: 5270MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540	35.83	39.21	8.34	35.85	47.53	68.2	-20.67	Vertical
15810	32.25	37.8	10.79	35.38	45.46	68.2	-22.74	Vertical
10540	35.37	39.21	8.34	35.85	47.07	68.2	-21.13	Horizontal
15810	31.89	37.8	10.79	35.38	45.10	68.2	-23.10	Horizontal
10540	30.27	39.21	8.34	35.85	41.97	54	-12.03	Vertical
15810	25.60	37.8	10.79	35.38	38.81	54	-15.19	Vertical
10540	23.51	39.21	8.34	35.85	35.21	54	-18.79	Horizontal
15810	26.18	37.8	10.79	35.38	39.39	54	-14.61	Horizontal

802.11ac(HT40)					Test Frequency: 5310MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620	33.78	39.22	8.38	35.93	45.45	68.2	-22.75	Vertical
15930	30.56	37.5	10.89	35.4	43.55	68.2	-24.65	Vertical
10620	35.55	39.22	8.38	35.93	47.22	68.2	-20.98	Horizontal
15930	32.36	37.5	10.89	35.4	45.35	68.2	-22.85	Horizontal
10620	28.61	39.22	8.38	35.93	40.28	54	-13.72	Vertical
15930	25.81	37.5	10.89	35.4	38.80	54	-15.20	Vertical
10620	25.40	39.22	8.38	35.93	37.07	54	-16.93	Horizontal
15930	26.93	37.5	10.89	35.4	39.92	54	-14.08	Horizontal
802.11ac(HT40)					Test Frequency: 5510MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020	36.98	39.3	8.54	36.4	48.42	68.2	-19.78	Vertical
16530	31.57	39.34	11.07	35.91	46.07	68.2	-22.13	Vertical
11020	34.51	39.3	8.54	36.4	45.95	68.2	-22.25	Horizontal
16530	34.03	39.34	11.07	35.91	48.53	68.2	-19.67	Horizontal
11020	29.74	39.3	8.54	36.4	41.18	54	-12.82	Vertical
16530	28.95	39.34	11.07	35.91	43.45	54	-10.55	Vertical
11020	25.80	39.3	8.54	36.4	37.24	54	-16.76	Horizontal
16530	25.16	39.34	11.07	35.91	39.66	54	-14.34	Horizontal

802.11ac(HT40)					Test Frequency: 5550MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11100	36.09	39.32	8.57	36.38	47.60	68.2	-20.60	Vertical
16650	34.54	39.42	11.1	36	49.06	68.2	-19.14	Vertical
11100	33.30	39.32	8.57	36.38	44.81	68.2	-23.39	Horizontal
16650	32.28	39.42	11.1	36	46.80	68.2	-21.40	Horizontal
11100	26.94	39.32	8.57	36.38	38.45	54	-15.55	Vertical
16650	28.18	39.42	11.1	36	42.70	54	-11.30	Vertical
11100	24.50	39.32	8.57	36.38	36.01	54	-17.99	Horizontal
16650	27.17	39.42	11.1	36	41.69	54	-12.31	Horizontal
802.11ac(HT40)					Test Frequency: 5670MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340	37.14	39.37	8.67	36.33	48.85	68.2	-19.35	Vertical
17010	33.67	39.7	11.18	36.3	48.25	68.2	-19.95	Vertical
11340	33.52	39.37	8.67	36.33	45.23	68.2	-22.97	Horizontal
17010	30.59	39.7	11.18	36.3	45.17	68.2	-23.03	Horizontal
11340	29.16	39.37	8.67	36.33	40.87	54	-13.13	Vertical
17010	28.69	39.7	11.18	36.3	43.27	54	-10.73	Vertical
11340	27.15	39.37	8.67	36.33	38.86	54	-15.14	Horizontal
17010	26.36	39.7	11.18	36.3	40.94	54	-13.06	Horizontal

802.11ac(HT80)					Test Frequency: 5210MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	34.03	39.06	8.29	35.71	45.67	68.2	-22.53	Vertical
15630	31.97	38.2	10.65	35.36	45.46	68.2	-22.74	Vertical
10420	32.82	39.06	8.29	35.71	44.46	68.2	-23.74	Horizontal
15630	33.24	38.2	10.65	35.36	46.73	68.2	-21.47	Horizontal
10420	30.83	39.06	8.29	35.71	42.47	54	-11.53	Vertical
15630	26.21	38.2	10.65	35.36	39.70	54	-14.30	Vertical
10420	24.78	39.06	8.29	35.71	36.42	54	-17.58	Horizontal
15630	27.83	38.2	10.65	35.36	41.32	54	-12.68	Horizontal
802.11ac(HT80)					Test Frequency: 5290MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10580	33.78	39.21	8.36	35.89	45.46	68.2	-22.74	Vertical
15870	35.24	37.7	10.85	35.39	48.40	68.2	-19.80	Vertical
10580	34.03	39.21	8.36	35.89	45.71	68.2	-22.49	Horizontal
15870	34.75	37.7	10.85	35.39	47.91	68.2	-20.29	Horizontal
10580	28.23	39.21	8.36	35.89	39.91	54	-14.09	Vertical
15870	26.91	37.7	10.85	35.39	40.07	54	-13.93	Vertical
10580	29.00	39.21	8.36	35.89	40.68	54	-13.32	Horizontal
15870	25.64	37.7	10.85	35.39	38.80	54	-15.20	Horizontal

802.11ac(HT80)					Test Frequency: 5530MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11060	37.02	39.31	8.56	36.39	48.50	68.2	-19.70	Vertical
16590	31.02	39.38	11.08	35.96	45.52	68.2	-22.68	Vertical
11060	26.31	39.31	8.56	36.39	37.79	68.2	-30.41	Horizontal
16590	28.48	39.38	11.08	35.96	42.98	68.2	-25.22	Horizontal
11060	27.22	39.31	8.56	36.39	38.70	54	-15.30	Vertical
16590	23.07	39.38	11.08	35.96	37.57	54	-16.43	Vertical
11060	1.03	39.31	8.56	36.39	12.51	54	-41.49	Horizontal
16590	0.73	39.38	11.08	35.96	15.23	54	-38.77	Horizontal
802.11ac(HT80)					Test Frequency: 5610MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11220	37.46	39.34	8.62	36.36	49.06	68.2	-19.14	Vertical
16830	31.65	39.58	11.13	36.17	46.19	68.2	-22.01	Vertical
11220	31.99	39.34	8.62	36.36	43.59	68.2	-24.61	Horizontal
16830	31.53	39.58	11.13	36.17	46.07	68.2	-22.13	Horizontal
11220	30.42	39.34	8.62	36.36	42.02	54	-11.98	Vertical
16830	25.14	39.58	11.13	36.17	39.68	54	-14.32	Vertical
11220	28.76	39.34	8.62	36.36	40.36	54	-13.64	Horizontal
16830	23.03	39.58	11.13	36.17	37.57	54	-16.43	Horizontal

802.11ax(HE20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	36.07	38.96	8.27	35.64	47.66	68.2	-20.54	Vertical
15540	34.56	38.4	10.57	35.35	48.18	68.2	-20.02	Vertical
10360	36.25	38.96	8.27	35.64	47.84	68.2	-20.36	Horizontal
15540	33.36	38.4	10.57	35.35	46.98	68.2	-21.22	Horizontal
10360	27.24	38.96	8.27	35.64	38.83	54	-15.17	Vertical
15540	28.12	38.4	10.57	35.35	41.74	54	-12.26	Vertical
10360	27.89	38.96	8.27	35.64	39.48	54	-14.52	Horizontal
15540	27.72	38.4	10.57	35.35	41.34	54	-12.66	Horizontal
802.11ax(HE20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.94	39.01	8.29	35.67	48.57	68.2	-19.63	Vertical
15600	33.24	38.3	10.62	35.36	46.80	68.2	-21.40	Vertical
10400	36.68	39.01	8.29	35.67	48.31	68.2	-19.89	Horizontal
15600	32.62	38.3	10.62	35.36	46.18	68.2	-22.02	Horizontal
10400	26.03	39.01	8.29	35.67	37.66	54	-16.34	Vertical
15600	25.97	38.3	10.62	35.36	39.53	54	-14.47	Vertical
10400	24.83	39.01	8.29	35.67	36.46	54	-17.54	Horizontal
15600	24.99	38.3	10.62	35.36	38.55	54	-15.45	Horizontal

802.11ax(HE20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	38.36	39.15	8.32	35.78	50.05	68.2	-18.15	Vertical
15720	33.58	38	10.72	35.37	46.93	68.2	-21.27	Vertical
10480	33.70	39.15	8.32	35.78	45.39	68.2	-22.81	Horizontal
15720	31.68	38	10.72	35.37	45.03	68.2	-23.17	Horizontal
10480	29.14	39.15	8.32	35.78	40.83	54	-13.17	Vertical
15720	27.04	38	10.72	35.37	40.39	54	-13.61	Vertical
10480	24.92	39.15	8.32	35.78	36.61	54	-17.39	Horizontal
15720	27.03	38	10.72	35.37	40.38	54	-13.62	Horizontal
802.11ax(HE20)					Test Frequency: 5260MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	37.45	39.2	8.34	35.82	49.17	68.2	-19.03	Vertical
15780	32.30	37.9	10.77	35.38	45.59	68.2	-22.61	Vertical
10520	36.44	39.2	8.34	35.82	48.16	68.2	-20.04	Horizontal
15780	30.75	37.9	10.77	35.38	44.04	68.2	-24.16	Horizontal
10520	29.90	39.2	8.34	35.82	41.62	54	-12.38	Vertical
15780	28.92	37.9	10.77	35.38	42.21	54	-11.79	Vertical
10520	26.61	39.2	8.34	35.82	38.33	54	-15.67	Horizontal
15780	25.46	37.9	10.77	35.38	38.75	54	-15.25	Horizontal

802.11ax(HE20)					Test Frequency: 5280MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560	34.24	38.86	8.35	39.35	42.10	68.2	-26.10	Vertical
15840	36.46	38.2	10.82	39.6	45.88	68.2	-22.32	Vertical
10560	36.43	38.86	8.35	39.35	44.29	68.2	-23.91	Horizontal
15840	33.70	38.2	10.82	39.6	43.12	68.2	-25.08	Horizontal
10560	30.81	38.86	8.35	39.35	38.67	54	-15.33	Vertical
15840	25.96	38.2	10.82	39.6	35.38	54	-18.62	Vertical
10560	26.75	38.86	8.35	39.35	34.61	54	-19.39	Horizontal
15840	25.10	38.2	10.82	39.6	34.52	54	-19.48	Horizontal
802.11ax(HE20)					Test Frequency: 5320MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	37.48	39.22	8.38	35.96	49.12	68.2	-19.08	Vertical
15960	34.35	37.5	10.92	35.4	47.37	68.2	-20.83	Vertical
10640	36.22	39.22	8.38	35.96	47.86	68.2	-20.34	Horizontal
15960	31.57	37.5	10.92	35.4	44.59	68.2	-23.61	Horizontal
10640	26.66	39.22	8.38	35.96	38.30	54	-15.70	Vertical
15960	27.87	37.5	10.92	35.4	40.89	54	-13.11	Vertical
10640	28.31	39.22	8.38	35.96	39.95	54	-14.05	Horizontal
15960	23.67	37.5	10.92	35.4	36.69	54	-17.31	Horizontal

802.11ax(HE20)					Test Frequency: 5500MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	34.62	39.3	8.53	36.4	46.05	68.2	-22.15	Vertical
16500	34.62	39.3	11.06	35.87	49.11	68.2	-19.09	Vertical
11000	35.88	39.3	8.53	36.4	47.31	68.2	-20.89	Horizontal
16500	34.70	39.3	11.06	35.87	49.19	68.2	-19.01	Horizontal
11000	29.35	39.3	8.53	36.4	40.78	54	-13.22	Vertical
16500	28.81	39.3	11.06	35.87	43.30	54	-10.70	Vertical
11000	28.88	39.3	8.53	36.4	40.31	54	-13.69	Horizontal
16500	26.81	39.3	11.06	35.87	41.30	54	-12.70	Horizontal
802.11ax(HE20)					Test Frequency: 5580MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	35.06	39.33	8.6	36.37	46.62	68.2	-21.58	Vertical
16740	35.89	39.5	11.11	36.09	50.41	68.2	-17.79	Vertical
11160	33.32	39.33	8.6	36.37	44.88	68.2	-23.32	Horizontal
16740	32.71	39.5	11.11	36.09	47.23	68.2	-20.97	Horizontal
11160	28.03	39.33	8.6	36.37	39.59	54	-14.41	Vertical
16740	28.31	39.5	11.11	36.09	42.83	54	-11.17	Vertical
11160	29.17	39.33	8.6	36.37	40.73	54	-13.27	Horizontal
16740	24.13	39.5	11.11	36.09	38.65	54	-15.35	Horizontal

802.11ax(HE20)					Test Frequency: 5700MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	35.46	39.38	8.7	36.32	47.22	68.2	-20.98	Vertical
17100	32.86	40.22	11.26	36.29	48.05	68.2	-20.15	Vertical
11400	35.40	39.38	8.7	36.32	47.16	68.2	-21.04	Horizontal
17100	31.78	40.22	11.26	36.29	46.97	68.2	-21.23	Horizontal
11400	28.49	39.38	8.7	36.32	40.25	54	-13.75	Vertical
17100	25.26	40.22	11.26	36.29	40.45	54	-13.55	Vertical
11400	25.51	39.38	8.7	36.32	37.27	54	-16.73	Horizontal
17100	25.76	40.22	11.26	36.29	40.95	54	-13.05	Horizontal
802.11ax(HE40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	34.23	39.01	8.28	35.67	45.85	68.2	-22.35	Vertical
15570	34.61	38.3	10.6	35.36	48.15	68.2	-20.05	Vertical
10380	33.64	39.01	8.28	35.67	45.26	68.2	-22.94	Horizontal
15570	34.67	38.3	10.6	35.36	48.21	68.2	-19.99	Horizontal
10380	29.00	39.01	8.28	35.67	40.62	54	-13.38	Vertical
15570	27.37	38.3	10.6	35.36	40.91	54	-13.09	Vertical
10380	27.96	39.01	8.28	35.67	39.58	54	-14.42	Horizontal
15570	24.64	38.3	10.6	35.36	38.18	54	-15.82	Horizontal

802.11ax(HE40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	36.52	39.11	8.31	35.75	48.19	68.2	-20.01	Vertical
15690	34.06	38.1	10.7	35.37	47.49	68.2	-20.71	Vertical
10460	32.66	39.11	8.31	35.75	44.33	68.2	-23.87	Horizontal
15690	30.34	38.1	10.7	35.37	43.77	68.2	-24.43	Horizontal
10460	28.19	39.11	8.31	35.75	39.86	54	-14.14	Vertical
15690	25.52	38.1	10.7	35.37	38.95	54	-15.05	Vertical
10460	24.78	39.11	8.31	35.75	36.45	54	-17.55	Horizontal
15690	27.00	38.1	10.7	35.37	40.43	54	-13.57	Horizontal
802.11ax(HE40)					Test Frequency: 5270MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540	35.91	39.21	8.34	35.85	47.61	68.2	-20.59	Vertical
15810	32.31	37.8	10.79	35.38	45.52	68.2	-22.68	Vertical
10540	35.50	39.21	8.34	35.85	47.20	68.2	-21.00	Horizontal
15810	31.95	37.8	10.79	35.38	45.16	68.2	-23.04	Horizontal
10540	30.33	39.21	8.34	35.85	42.03	54	-11.97	Vertical
15810	25.70	37.8	10.79	35.38	38.91	54	-15.09	Vertical
10540	23.58	39.21	8.34	35.85	35.28	54	-18.72	Horizontal
15810	26.23	37.8	10.79	35.38	39.44	54	-14.56	Horizontal

802.11ax(HE40)					Test Frequency: 5310MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620	33.88	39.22	8.38	35.93	45.55	68.2	-22.65	Vertical
15930	30.64	37.5	10.89	35.4	43.63	68.2	-24.57	Vertical
10620	35.61	39.22	8.38	35.93	47.28	68.2	-20.92	Horizontal
15930	32.46	37.5	10.89	35.4	45.45	68.2	-22.75	Horizontal
10620	28.68	39.22	8.38	35.93	40.35	54	-13.65	Vertical
15930	25.87	37.5	10.89	35.4	38.86	54	-15.14	Vertical
10620	25.46	39.22	8.38	35.93	37.13	54	-16.87	Horizontal
15930	26.98	37.5	10.89	35.4	39.97	54	-14.03	Horizontal
802.11ax(HE40)					Test Frequency: 5510MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020	37.12	39.3	8.54	36.4	48.56	68.2	-19.64	Vertical
16530	31.64	39.34	11.07	35.91	46.14	68.2	-22.06	Vertical
11020	34.56	39.3	8.54	36.4	46.00	68.2	-22.20	Horizontal
16530	34.16	39.34	11.07	35.91	48.66	68.2	-19.54	Horizontal
11020	29.82	39.3	8.54	36.4	41.26	54	-12.74	Vertical
16530	29.01	39.34	11.07	35.91	43.51	54	-10.49	Vertical
11020	25.87	39.3	8.54	36.4	37.31	54	-16.69	Horizontal
16530	25.21	39.34	11.07	35.91	39.71	54	-14.29	Horizontal

802.11ax(HE40)					Test Frequency: 5550MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11100	36.21	39.32	8.57	36.38	47.72	68.2	-20.48	Vertical
16650	34.62	39.42	11.1	36	49.14	68.2	-19.06	Vertical
11100	33.36	39.32	8.57	36.38	44.87	68.2	-23.33	Horizontal
16650	32.38	39.42	11.1	36	46.90	68.2	-21.30	Horizontal
11100	27.02	39.32	8.57	36.38	38.53	54	-15.47	Vertical
16650	28.25	39.42	11.1	36	42.77	54	-11.23	Vertical
11100	24.62	39.32	8.57	36.38	36.13	54	-17.87	Horizontal
16650	27.25	39.42	11.1	36	41.77	54	-12.23	Horizontal
802.11ax(HE40)					Test Frequency: 5670MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340	37.23	39.37	8.67	36.33	48.94	68.2	-19.26	Vertical
17010	33.74	39.7	11.18	36.3	48.32	68.2	-19.88	Vertical
11340	33.58	39.37	8.67	36.33	45.29	68.2	-22.91	Horizontal
17010	30.72	39.7	11.18	36.3	45.30	68.2	-22.90	Horizontal
11340	29.23	39.37	8.67	36.33	40.94	54	-13.06	Vertical
17010	28.75	39.7	11.18	36.3	43.33	54	-10.67	Vertical
11340	27.26	39.37	8.67	36.33	38.97	54	-15.03	Horizontal
17010	26.42	39.7	11.18	36.3	41.00	54	-13.00	Horizontal


802.11ax(HE80)					Test Frequency: 5210MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	33.95	39.06	8.29	35.71	45.59	68.2	-22.61	Vertical
15630	31.92	38.2	10.65	35.36	45.41	68.2	-22.79	Vertical
10420	32.78	39.06	8.29	35.71	44.42	68.2	-23.78	Horizontal
15630	33.21	38.2	10.65	35.36	46.70	68.2	-21.50	Horizontal
10420	30.79	39.06	8.29	35.71	42.43	54	-11.57	Vertical
15630	26.18	38.2	10.65	35.36	39.67	54	-14.33	Vertical
10420	24.76	39.06	8.29	35.71	36.40	54	-17.60	Horizontal
15630	27.80	38.2	10.65	35.36	41.29	54	-12.71	Horizontal
802.11ax(HE80)					Test Frequency: 5290MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10580	33.64	39.21	8.36	35.89	45.32	68.2	-22.88	Vertical
15870	35.18	37.7	10.85	35.39	48.34	68.2	-19.86	Vertical
10580	34.00	39.21	8.36	35.89	45.68	68.2	-22.52	Horizontal
15870	34.71	37.7	10.85	35.39	47.87	68.2	-20.33	Horizontal
10580	28.19	39.21	8.36	35.89	39.87	54	-14.13	Vertical
15870	26.89	37.7	10.85	35.39	40.05	54	-13.95	Vertical
10580	28.98	39.21	8.36	35.89	40.66	54	-13.34	Horizontal
15870	25.60	37.7	10.85	35.39	38.76	54	-15.24	Horizontal

802.11ax(HE80)					Test Frequency: 5530MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11060	36.91	39.31	8.56	36.39	48.39	68.2	-19.81	Vertical
16590	30.96	39.38	11.08	35.96	45.46	68.2	-22.74	Vertical
11060	26.27	39.31	8.56	36.39	37.75	68.2	-30.45	Horizontal
16590	28.42	39.38	11.08	35.96	42.92	68.2	-25.28	Horizontal
11060	27.18	39.31	8.56	36.39	38.66	54	-15.34	Vertical
16590	23.06	39.38	11.08	35.96	37.56	54	-16.44	Vertical
11060	0.99	39.31	8.56	36.39	12.47	54	-41.53	Horizontal
16590	0.71	39.38	11.08	35.96	15.21	54	-38.79	Horizontal
802.11ax(HE80)					Test Frequency: 5610MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11220	37.39	39.34	8.62	36.36	48.99	68.2	-19.21	Vertical
16830	31.58	39.58	11.13	36.17	46.12	68.2	-22.08	Vertical
11220	31.95	39.34	8.62	36.36	43.55	68.2	-24.65	Horizontal
16830	31.48	39.58	11.13	36.17	46.02	68.2	-22.18	Horizontal
11220	30.39	39.34	8.62	36.36	41.99	54	-12.01	Vertical
16830	25.13	39.58	11.13	36.17	39.67	54	-14.33	Vertical
11220	28.74	39.34	8.62	36.36	40.34	54	-13.66	Horizontal
16830	22.99	39.58	11.13	36.17	37.53	54	-16.47	Horizontal

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.

7.8 Frequency stability

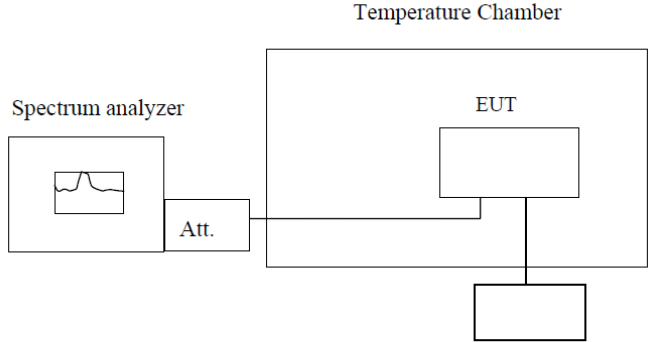Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055,
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

Test Condition	Test Mode	Test Frequency [MHz]	Ant	Result [ppm]	Limit [ppm]	Verdict
NTNV	Carrier	5180	1	-7.92	<=20	PASS
		5190	1	-6.79	<=20	PASS
		5200	1	-8.60	<=20	PASS
		5210	1	-2.24	<=20	PASS
		5230	1	1.89	<=20	PASS
		5240	1	-8.67	<=20	PASS
		5260	1	-5.72	<=20	PASS
		5270	1	-6.89	<=20	PASS
		5280	1	-6.61	<=20	PASS
		5290	1	-5.65	<=20	PASS
		5310	1	-6.29	<=20	PASS
		5320	1	-4.11	<=20	PASS
		5500	1	-6.10	<=20	PASS
		5510	1	-3.54	<=20	PASS
		5530	1	-6.24	<=20	PASS
		5550	1	-1.13	<=20	PASS
		5580	1	-1.76	<=20	PASS
		5610	1	-4.95	<=20	PASS
		5670	1	-6.94	<=20	PASS
		5700	1	-7.63	<=20	PASS

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---