



TEST REPORT

Product Name: Tablet PC(Notebook)
FCC ID: 2AWWW-MB01
Trademark: N/A
Model Number: MB01, the additional models refer to 4.1
Prepared For: Creature Information(Guangzhou)Technology Co., Limited
Address: Room B4A05, Block B, 203 Changfu Road, Tianhe district, Guangzhou, China
Manufacturer: Creature Information(Guangzhou)Technology Co., Limited
Address: Room B4A05, Block B, 203 Changfu Road, Tianhe district, Guangzhou, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Mar. 31, 2021
Sample tested Date: Mar. 31, 2021 to Apr. 8, 2021
Issue Date: Apr. 8, 2021
Report No.: CTB210331031RFX
Test Standards FCC Part 2, 22, 27
Test Results PASS
Remark: This is LTE radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Test Mode	8
4.5 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF EXPOSURE	12
6.1 Standard Applicable	12
6.2 Test Result	12
7. RF OUTPUT POWER	13
7.1 Standard Applicable	13
7.2 Test Procedure	13
7.3 Summary of Test Results/Plots	14
8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	21
8.1 Standard Applicable	21
8.2 Test Procedure	21
8.3 Summary of Test Results	21
9. EMISSION BANDWIDTH	22
9.1 Standard Applicable	22
9.2 Test Procedure	22
9.3 Summary of Test Results/Plots	22
10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	23
10.1 Standard Applicable	23
10.2 Test Procedure	24

10.3	Summary of Test Results/Plots.....	24
11.	SPURIOUS RADIATED EMISSIONS	25
11.1	Standard Applicable	25
11.2	Test Procedure	26
11.3	Summary of Test Results/Plots.....	27
12.	FREQUENCY STABILITY	42
12.1	Standard Applicable	42
12.2	Test Procedure	42
12.3	Summary of Test Results/Plots.....	42

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210331031RFX	Apr. 8, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
Conducted output power	Part 2.1046(a)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 22.913(a)(5)/Part27.50(h)(2) Part 27.50 (a) (3)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v02r02	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	KDB 971168 D01v02r02	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	KDB 971168 D01v02r02	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Field strength of spurious radiation	Part 2.1053/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	MB01, I8, I8 Plus, I8 Pro, I8 Power, I8 A, I8 A Plus, I8 A Pro, I8 A Power, I8 S, I8 S Plus, I8 S Pro, I8 S Power, I9, I9 Plus, I9 Pro, I9 Power, I9 A, I9 A Plus, I9 A Pro, I9 A Power, I9 S, I9 S Plus, I9 S Pro, I9 S Power, I10, I10 Plus, I10 Pro, I10 Power, I10 A, I10 A Plus, I10 A Pro, I10 A Power, I10 S, I10 S Plus, I10 S Pro, I10 S Power, I11, I11 Plus, I11 Pro, I11 Power, I11 A, I11 A Plus, I11 A Pro, I11 A Power, I11 S, I11 S Plus, I11 S Pro, I11 S Power, I12, I12 Plus, I12 Pro, I12 Power, I12 A, I12 A Plus, I12 A Pro, I12 A Power, I12 S, I12 S Plus, I12 S Pro, I12 S Power, I6, I7, I13, M11, M12, M13, M14, M15, M17, S1, S2, S3, S4, S5, S6, S7, S8, S9, Y11, Y13, Y14, Y15, X13, X14, X15, X17, S13, S14, S15, S17, B1, B2, B3, B4, B5, B6, B7, B8, B9, B10
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: Test sample model: MB01
Hardware Version:	V2.0
Software Version:	V1.00_20210331
Operation Frequency:	FDD-LTE BAND 5: 824-849MHz TDD-LTE BAND 38: 2570-2620MHz TDD-LTE BAND 40a: 2305-2315MHz TDD-LTE BAND 40b: 2350-2360MHz TDD-LTE BAND 41: 2555-2655MHz
Max. RF output power:	FDD-LTE BAND 5: 22.19dBm TDD-LTE BAND 38: 20.36dBm TDD-LTE BAND 40: 20.97dBm TDD-LTE BAND 41: 20.34dBm
Type of Modulation:	QPSK, 16QAM
Antenna installation:	Internal antenna
Antenna Gain:	FDD-LTE BAND 5: 0.27dBi TDD-LTE BAND 38: 0.63dBi TDD-LTE BAND 40: 0.49dBi TDD-LTE BAND 41: 0.62dBi
Ratings:	DC 5V, 2A, charging from adapter Battery DC 3.8V, 6000mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE BAND 5	Low, Middle, High Channels
TM2	FDD-LTE BAND 38	Low, Middle, High Channels
TM3	FDD-LTE BAND 40a	Low, Middle, High Channels
TM3	FDD-LTE BAND 40b	Low, Middle, High Channels
TM5	FDD-LTE BAND 41	Low, Middle, High Channels

Test Mode	Test Frequency	Bandwidth (MHz)	Number [UL]	Frequency of Uplink(MHz)
FDD band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Mid Range	1.4/3/5/100	20525	836.5
		1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
	High Range	10	20600	844

Test Mode	Test Frequency	Bandwidth (MHz)	Number [UL]	Frequency of Uplink(MHz)
FDD band 38	Low Range	5	37775	2572.5
		10	37800	2575
		15	37825	2577.5
		20	37850	2580

	Mid Range	5/10/15/20	38000	2595
	High Range	5	38225	2617.5
		10	38200	2615
		15	38175	2612.5
		20	38150	2610

Test Mode	Test Frequency	Bandwidth (MHz)	Number [UL]	Frequency of Uplink(MHz)
FDD band 40a	Low Range	5	38725	2307.5
	Mid Range	5/10	38750	2310
	High Range	5	38775	2312.5

Test Mode	Test Frequency	Bandwidth (MHz)	Number [UL]	Frequency of Uplink(MHz)
FDD band 40b	Low Range	5	39175	2352.5
	Mid Range	5/10	39200	2355.0
	High Range	5	39225	2357.5

Test Mode	Test Frequency	Bandwidth (MHz)	Number [UL]	Frequency of Uplink(MHz)
FDD band 41	Low Range	5	40265	2557.5
		10	40290	2560
		15	40315	2562.5
		20	40340	2565
	Mid Range	5/10/15/20	40740	2605
	High Range	5	41215	2652.5
		10	41190	2650
		15	41165	2647.5
		20	41140	2645

4.5 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.8V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Sep. 28, 2020	Sep. 28, 2021
2	Power Sensor	Agilent	U2021XA	MY56120032	Sep. 28, 2020	Sep. 28, 2021
3	Power Sensor	Agilent	U2021XA	MY56120034	Sep. 28, 2020	Sep. 28, 2021
4	Communication test set	R&S	CMW500	108058	Sep. 28, 2020	Sep. 28, 2021
5	Spectrum Analyzer	R&S	FSP40	100550	Sep. 28, 2020	Sep. 28, 2021
6	Signal Generator	Agilent	N5181A	MY49060920	Sep. 28, 2020	Sep. 28, 2021
7	Signal Generator	Agilent	N5182A	MY47420195	Sep. 28, 2020	Sep. 28, 2021
8	Communication test set	Agilent	E5515C	MY50102567	Oct. 10, 2020	Oct. 10, 2021
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Sep. 28, 2020	Sep. 28, 2021
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Sep. 28, 2020	Sep. 28, 2021
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Sep. 28, 2020	Sep. 28, 2021
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Sep. 28, 2020	Sep. 28, 2021
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Sep. 28, 2020	Sep. 28, 2021
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 9, 2019	Nov. 08, 2022
17	Receiver	R&S	ESPI	100362	Sep. 28, 2020	Sep. 28, 2021

18	Amplifier	HP	8447E	2945A02747	Sep. 28, 2020	Sep. 28, 2021
19	Amplifier	Agilent	8449B	3008A01838	Sep. 28, 2020	Sep. 28, 2021
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	Nov. 02, 2020	Nov. 01, 2021
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2020	Nov. 01, 2021
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Sep. 28, 2020	Sep. 28, 2021
24	loop antenna	ZHINAN	ZN30900A	/	Sep. 28, 2020	Sep. 28, 2021
25	Horn antenna	A/H/System	SAS-574	588	Sep. 28, 2020	Sep. 28, 2021
26	Amplifier	AEROFLEX	/	S/N/ 097	Sep. 28, 2020	Sep. 28, 2021

6. RF EXPOSURE

6.1 Standard Applicable

According to §1.1307 and §2.1091, §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

7. RF OUTPUT POWER

7.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), , fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.


According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

According to §27.50(H)(2), Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

According to §27.50(A)(3), Mobile and portable stations. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

7.2 Test Procedure

Conducted output power test method:

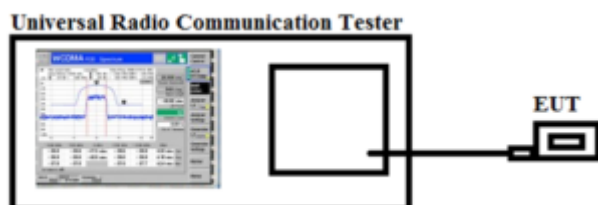

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to

identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.

4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Summary of Test Results/Plots

Max. Radiated Power:

FDD-LTE Band 5

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.55	<38	PASS
		H	21.46		
	MCH	V	21.16		PASS
		H	21.04		
	HCH	V	21.38		PASS
		H	21.33		
16QAM	LCH	V	20.34	<38	PASS
		H	20.20		
	MCH	V	20.19		PASS
		H	19.17		
	HCH	V	19.95		PASS
		H	19.94		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.30	<38	PASS
		H	21.24		
	MCH	V	21.07		PASS
		H	20.31		
	HCH	V	21.31		PASS
		H	21.32		
16QAM	LCH	V	20.38	<38	PASS
		H	21.97		
	MCH	V	19.35		PASS
		H	20.12		

	HCH	V	19.92		PASS
		H	19.94		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.35	<38	PASS
		H	21.31		
	MCH	V	21.32		PASS
		H	21.16		
	HCH	V	21.18		PASS
		H	20.16		
16QAM	LCH	V	20.40	<38	PASS
		H	19.30		
	MCH	V	20.20		PASS
		H	20.14		
	HCH	V	20.26		PASS
		H	20.24		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.28	<38	PASS
		H	20.22		
	MCH	V	20.20		PASS
		H	21.10		
	HCH	V	21.23		PASS
		H	21.20		
16QAM	LCH	V	20.41	<38	PASS
		H	20.23		
	MCH	V	20.22		PASS
		H	20.21		
	HCH	V	19.99		PASS
		H	19.94		

FDD-LTE Band 38

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.31	<33	PASS
		H	20.23		
	MCH	V	20.05		PASS

	HCH	H	19.98		PASS
		V	19.82		
		H	19.79		
16QAM	LCH	V	19.37	<33	PASS
		H	19.33		
	MCH	V	19.38		PASS
		H	19.29		
	HCH	V	19.08		PASS
		H	19.03		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.28	<33	PASS
		H	20.20		
	MCH	V	20.15		PASS
		H	20.08		
	HCH	V	19.84		PASS
		H	19.78		
16QAM	LCH	V	19.43	<33	PASS
		H	19.41		
	MCH	V	19.18		PASS
		H	19.11		
	HCH	V	18.70		PASS
		H	18.65		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.18	<33	PASS
		H	20.12		
	MCH	V	20.25		PASS
		H	20.13		
	HCH	V	19.97		PASS
		H	19.93		
16QAM	LCH	V	19.42	<33	PASS
		H	19.46		
	MCH	V	19.26		PASS
		H	19.14		
	HCH	V	18.89		PASS

		H	18.82		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.24	<33	PASS
		H	20.70		
	MCH	V	20.15		PASS
		H	19.22		
	HCH	V	19.95		PASS
		H	19.89		
16QAM	LCH	V	19.28	<33	PASS
		H	19.37		
	MCH	V	19.08		PASS
		H	19.01		
	HCH	V	18.51		PASS
		H	18.47		

TDD-LTE Band 40A

Channel Bandwidth: 5.0 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.81	<23.98	PASS
		H	20.92		
	MCH	V	20.93		PASS
		H	20.78		
	HCH	V	20.88		PASS
		H	20.78		
16QAM	LCH	V	20.30	<23.98	PASS
		H	20.35		
	MCH	V	20.32		PASS
		H	21.85		
	HCH	V	22.08		PASS
		H	21.69		
Channel Bandwidth: 10MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.90	<23.98	PASS
		H	20.86		
	MCH	V	20.27		PASS
		H	20.61		

16QAM	HCH	V	20.39	<23.98	PASS
		H	19.84		
	LCH	V	19.94		PASS
		H	19.87		
	MCH	V	20.97		PASS
		H	21.16		
	HCH	V	21.05		PASS
		H	20.01		

TDD-LTE Band 40B

Channel Bandwidth: 5.0 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.03	<23.98	PASS
		H	20.24		
	MCH	V	20.33		PASS
		H	20.16		
	HCH	V	19.69		PASS
		H	19.89		
16QAM	LCH	V	20.03	<23.98	PASS
		H	20.05		
	MCH	V	20.11		PASS
		H	19.96		
	HCH	V	19.88		PASS
		H	19.36		
Channel Bandwidth: 10MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.13	<23.98	PASS
		H	20.56		
	MCH	V	20.32		PASS
		H	20.03		
	HCH	V	19.93		PASS
		H	19.83		
16QAM	LCH	V	19.87	<23.98	PASS
		H	19.82		
	MCH	V	19.63		PASS
		H	20.03		
	HCH	V	20.07		PASS
		H	20.15		

FDD-LTE Band 41

Channel Bandwidth: 5.0 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	-1.43	<33	PASS
		H	2.93		
	MCH	V	15.55		PASS
		H	15.50		
	HCH	V	8.66		PASS
		H	5.65		
16QAM	LCH	V	-1.63	<33	PASS
		H	2.36		
	MCH	V	15.10		PASS
		H	14.70		
	HCH	V	8.39		PASS
		H	5.38		
Channel Bandwidth: 10MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	0.53	<33	PASS
		H	13.14		
	MCH	V	15.73		PASS
		H	15.71		
	HCH	V	14.14		PASS
		H	11.80		
16QAM	LCH	V	6.55	<33	PASS
		H	15.03		
	MCH	V	15.13		PASS
		H	15.09		
	HCH	V	11.48		PASS
		H	5.48		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	13.86	<33	PASS
		H	16.20		
	MCH	V	15.25		PASS
		H	14.72		

	HCH	V	14.22		PASS
		H	6.36		
16QAM	LCH	V	13.04	<33	PASS
		H	15.35		
	MCH	V	15.07		PASS
		H	15.17		
	HCH	V	6.19		PASS
		H	12.49		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	15.93	<33	PASS
		H	16.06		
	MCH	V	15.68		PASS
		H	15.57		
	HCH	V	13.57		PASS
		H	13.06		
16QAM	LCH	V	15.27	<33	PASS
		H	15.42		
	MCH	V	14.75		PASS
		H	15.00		
	HCH	V	13.44		PASS
		H	6.30		

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

8.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

8.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

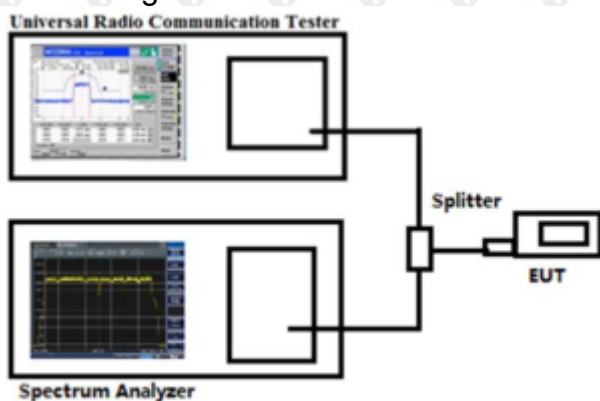

8.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

9. EMISSION BANDWIDTH

9.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2 Test Procedure

According to § 22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

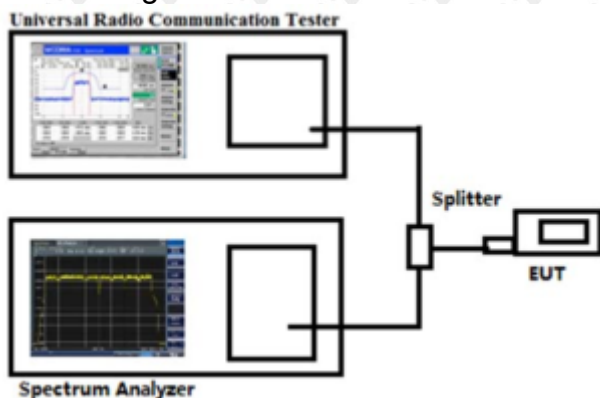

9.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth
Test result: Pass

10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be


attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

10.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10 th harmonic.

Test Configuration for the out of band emissions testing:

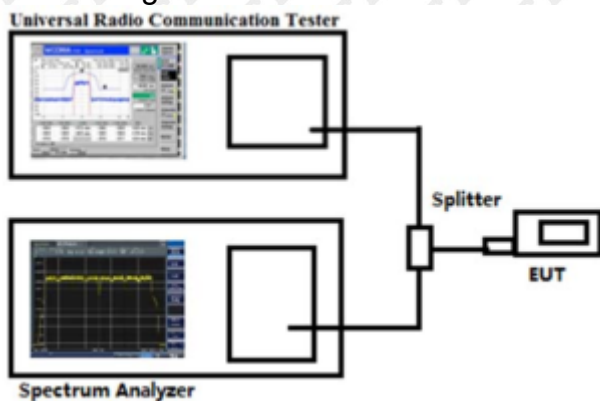

10.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission
Test result: Pass

11. SPURIOUS RADIATED EMISSIONS

11.1 Standard Applicable

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to § 27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to § 27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to § 27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

11.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

11.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

Test Data:
QPSK

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1274.721	152	40	-60.68	-13.00	-47.68	Pass	H
1633.892	150	54	-51.97	-13.00	-38.97	Pass	H
3859.037	152	209	-50.32	-13.00	-37.32	Pass	H
5762.527	153	100	-47.32	-13.00	-34.32	Pass	H
6501.260	152	276	-46.04	-13.00	-33.04	Pass	H
7966.120	152	100	-46.46	-13.00	-33.46	Pass	H
1218.322	148	159	-58.06	-13.00	-45.06	Pass	V
1349.515	151	66	-59.48	-13.00	-46.48	Pass	V
3491.050	151	42	-54.52	-13.00	-41.52	Pass	V
3824.302	151	145	-52.47	-13.00	-39.47	Pass	V
5831.171	149	57	-48.67	-13.00	-35.67	Pass	V
6554.944	153	304	-48.22	-13.00	-35.22	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1285.754	148	28	-58.44	-13.00	-45.44	Pass	H
1592.179	153	40	-52.71	-13.00	-39.71	Pass	H
3863.718	150	91	-50.18	-13.00	-37.18	Pass	H
5772.008	150	24	-47.41	-13.00	-34.41	Pass	H
6508.712	150	64	-46.74	-13.00	-33.74	Pass	H
7987.524	151	158	-48.53	-13.00	-35.53	Pass	H
1187.078	149	257	-58.30	-13.00	-45.30	Pass	V
1444.228	152	217	-58.50	-13.00	-45.50	Pass	V
3491.005	152	166	-52.75	-13.00	-39.75	Pass	V
3828.463	150	321	-50.01	-13.00	-37.01	Pass	V
5819.595	149	256	-48.91	-13.00	-35.91	Pass	V
6517.992	152	119	-49.78	-13.00	-36.78	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1255.758	152	82	-59.10	-13.00	-46.10	Pass	H
1592.939	152	133	-53.93	-13.00	-40.93	Pass	H
3805.815	148	238	-52.28	-13.00	-39.28	Pass	H
5771.354	151	218	-45.76	-13.00	-32.76	Pass	H
6460.374	152	212	-46.76	-13.00	-33.76	Pass	H
7969.397	152	135	-46.17	-13.00	-33.17	Pass	H
1237.367	148	313	-58.65	-13.00	-45.65	Pass	V
1425.805	149	181	-60.49	-13.00	-47.49	Pass	V
3413.608	152	199	-54.46	-13.00	-41.46	Pass	V
3838.075	153	106	-50.97	-13.00	-37.97	Pass	V
5790.637	150	252	-47.67	-13.00	-34.67	Pass	V
6463.444	150	69	-47.33	-13.00	-34.33	Pass	V

16QAM

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1274.414	150	316	-60.26	-13.00	-47.26	Pass	H
1586.496	150	311	-52.73	-13.00	-39.73	Pass	H
3785.222	150	261	-49.40	-13.00	-36.40	Pass	H
5785.566	152	349	-48.24	-13.00	-35.24	Pass	H
6508.923	149	55	-46.06	-13.00	-33.06	Pass	H
8037.229	153	230	-49.02	-13.00	-36.02	Pass	H
1204.199	150	170	-60.00	-13.00	-47.00	Pass	V
1393.910	149	104	-59.53	-13.00	-46.53	Pass	V
3453.009	153	134	-53.28	-13.00	-40.28	Pass	V
3832.912	150	325	-51.50	-13.00	-38.50	Pass	V
5766.325	148	319	-46.38	-13.00	-33.38	Pass	V
6476.194	150	13	-48.25	-13.00	-35.25	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1280.766	149	13	-59.67	-13.00	-46.67	Pass	H
1623.596	148	27	-51.65	-13.00	-38.65	Pass	H
3825.338	151	290	-50.94	-13.00	-37.94	Pass	H
5852.068	149	241	-47.10	-13.00	-34.10	Pass	H
6500.431	149	72	-48.31	-13.00	-35.31	Pass	H
7960.070	151	192	-48.74	-13.00	-35.74	Pass	H
1235.840	152	310	-57.98	-13.00	-44.98	Pass	V
1363.961	150	155	-59.62	-13.00	-46.62	Pass	V
3443.031	153	298	-51.90	-13.00	-38.90	Pass	V
3878.058	150	279	-50.73	-13.00	-37.73	Pass	V
5775.252	150	80	-46.61	-13.00	-33.61	Pass	V
6526.687	153	148	-50.28	-13.00	-37.28	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1199.624	148	173	-59.70	-13.00	-46.70	Pass	H
1595.673	150	184	-52.86	-13.00	-39.86	Pass	H
3774.401	150	26	-49.98	-13.00	-36.98	Pass	H
5776.211	151	176	-47.82	-13.00	-34.82	Pass	H
6510.263	149	8	-47.82	-13.00	-34.82	Pass	H
7955.124	149	77	-49.00	-13.00	-36.00	Pass	H
1169.030	151	170	-59.48	-13.00	-46.48	Pass	V
1446.031	153	21	-60.27	-13.00	-47.27	Pass	V
3442.499	152	317	-53.39	-13.00	-40.39	Pass	V
3908.846	151	58	-51.82	-13.00	-38.82	Pass	V
5819.102	153	111	-48.39	-13.00	-35.39	Pass	V
6548.387	150	264	-48.30	-13.00	-35.30	Pass	V

Note:

- 1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 38 37775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1336.393	150	78	-55.43	-25	-30.43	Pass	H
1727.692	149	291	-48.10	-25	-23.10	Pass	H
3902.820	151	213	-50.54	-25	-25.54	Pass	H
5857.116	150	89	-44.53	-25	-19.53	Pass	H
6497.657	151	329	-49.34	-25	-24.34	Pass	H
7998.321	148	138	-46.09	-25	-21.09	Pass	H
1218.626	149	99	-60.19	-25	-35.19	Pass	V
1438.694	148	217	-56.38	-25	-31.38	Pass	V
3569.375	150	12	-47.40	-25	-22.40	Pass	V
3835.505	150	137	-51.40	-25	-26.40	Pass	V
5802.656	146	356	-43.93	-25	-18.93	Pass	V
6554.934	146	95	-46.89	-25	-21.89	Pass	V

Band 38 38000 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.719	150	78	-56.80	-25	-31.80	Pass	H
1725.711	149	291	-49.68	-25	-24.68	Pass	H
3901.425	151	213	-49.97	-25	-24.97	Pass	H
5858.079	150	89	-48.45	-25	-23.45	Pass	H
6497.727	151	329	-44.38	-25	-19.38	Pass	H
7997.170	148	138	-46.25	-25	-21.25	Pass	H
1220.592	149	99	-58.36	-25	-33.36	Pass	V
1439.739	148	217	-59.78	-25	-34.78	Pass	V
3569.780	150	12	-48.06	-25	-23.06	Pass	V
3837.573	150	137	-51.63	-25	-26.63	Pass	V
5802.831	146	356	-45.47	-25	-20.47	Pass	V
6553.625	146	95	-47.66	-25	-22.66	Pass	V

Band 38 38225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.680	150	78	-55.19	-25	-30.19	Pass	H
1725.109	149	291	-49.67	-25	-24.67	Pass	H
3902.506	151	213	-51.37	-25	-26.37	Pass	H
5856.865	150	89	-43.31	-25	-18.31	Pass	H
6499.700	151	329	-44.21	-25	-19.21	Pass	H
7997.598	148	138	-47.40	-25	-22.40	Pass	H
1218.352	149	99	-58.50	-25	-33.50	Pass	V
1439.035	148	217	-59.43	-25	-34.43	Pass	V
3571.322	150	12	-52.94	-25	-27.94	Pass	V
3836.682	150	137	-52.29	-25	-27.29	Pass	V
5804.277	146	356	-44.22	-25	-19.22	Pass	V
6553.398	146	95	-50.48	-25	-25.48	Pass	V

16QAM

Band 38 37775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.256	150	78	-55.08	-25	-30.08	Pass	H
1726.927	149	291	-51.44	-25	-26.44	Pass	H
3900.361	151	213	-48.36	-25	-23.36	Pass	H
5856.866	150	89	-47.27	-25	-22.27	Pass	H
6499.156	151	329	-44.64	-25	-19.64	Pass	H
7998.181	148	138	-42.99	-25	-17.99	Pass	H
1219.050	149	99	-60.50	-25	-35.50	Pass	V
1438.992	148	217	-55.45	-25	-30.45	Pass	V
3569.964	150	12	-49.09	-25	-24.09	Pass	V
3835.629	150	137	-49.70	-25	-24.70	Pass	V
5804.643	146	356	-47.10	-25	-22.10	Pass	V
6553.344	146	95	-51.27	-25	-26.27	Pass	V

Band 38 38000 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1336.631	150	78	-54.98	-25	-29.98	Pass	H
1726.455	149	291	-52.34	-25	-27.34	Pass	H
3900.962	151	213	-48.16	-25	-23.16	Pass	H
5858.963	150	89	-48.55	-25	-23.55	Pass	H
6498.948	151	329	-49.33	-25	-24.33	Pass	H
7996.250	148	138	-42.80	-25	-17.80	Pass	H
1219.036	149	99	-58.73	-25	-33.73	Pass	V
1439.134	148	217	-58.85	-25	-33.85	Pass	V
3571.679	150	12	-52.66	-25	-27.66	Pass	V
3836.715	150	137	-52.01	-25	-27.01	Pass	V
5802.054	146	356	-44.76	-25	-19.76	Pass	V
6553.287	146	95	-50.95	-25	-25.95	Pass	V

Band 38 38225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.899	150	78	-55.78	-25	-30.78	Pass	H
1725.365	149	291	-49.53	-25	-24.53	Pass	H
3901.233	151	213	-49.00	-25	-24.00	Pass	H
5858.617	150	89	-48.45	-25	-23.45	Pass	H
6499.667	151	329	-48.65	-25	-23.65	Pass	H
7997.042	148	138	-45.60	-25	-20.60	Pass	H
1219.296	149	99	-60.67	-25	-35.67	Pass	V
1438.289	148	217	-57.48	-25	-32.48	Pass	V
3569.318	150	12	-48.99	-25	-23.99	Pass	V
3836.118	150	137	-52.80	-25	-27.80	Pass	V
5803.753	146	356	-47.86	-25	-22.86	Pass	V
6554.412	146	95	-50.41	-25	-25.41	Pass	V

Note:

- 1)Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2)Tested with all kind of bandwidth,RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 40A 38725 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.046	151	14	-55.56	-40	-15.56	Pass	H
1725.101	147	71	-46.57	-40	-6.57	Pass	H
3853.117	150	318	-49.08	-40	-9.08	Pass	H
5927.849	147	56	-41.83	-40	-1.83	Pass	H
6504.439	147	216	-46.87	-40	-6.87	Pass	H
8057.915	151	79	-44.08	-40	-4.08	Pass	H
1191.455	151	65	-54.26	-40	-14.26	Pass	V
1382.861	146	225	-59.62	-40	-19.62	Pass	V
3535.750	149	47	-49.67	-40	-9.67	Pass	V
3854.526	150	73	-46.29	-40	-6.29	Pass	V
5820.415	147	168	-46.02	-40	-6.02	Pass	V
6520.207	150	28	-46.80	-40	-6.80	Pass	V

Band 40A 38750 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.382	151	14	-56.80	-40	-16.80	Pass	H
1725.474	147	71	-51.11	-40	-11.11	Pass	H
3853.585	150	318	-48.28	-40	-8.28	Pass	H
5927.367	147	56	-44.26	-40	-4.26	Pass	H
6504.673	147	216	-46.81	-40	-6.81	Pass	H
8057.912	151	79	-41.99	-40	-1.99	Pass	H
1191.846	151	65	-58.45	-40	-18.45	Pass	V
1382.828	146	225	-57.26	-40	-17.26	Pass	V
3536.120	149	47	-49.04	-40	-9.04	Pass	V
3855.293	150	73	-47.26	-40	-7.26	Pass	V
5820.137	147	168	-47.76	-40	-7.76	Pass	V
6519.745	150	28	-42.91	-40	-2.91	Pass	V

Band 40A 38775 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.635	151	14	-52.38	-40	-12.38	Pass	H
1724.718	147	71	-47.31	-40	-7.31	Pass	H
3853.001	150	318	-48.77	-40	-8.77	Pass	H
5927.461	147	56	-43.11	-40	-3.11	Pass	H
6505.198	147	216	-42.02	-40	-2.02	Pass	H
8058.002	151	79	-45.12	-40	-5.12	Pass	H
1191.934	151	65	-58.49	-40	-18.49	Pass	V
1382.399	146	225	-60.11	-40	-20.11	Pass	V
3536.516	149	47	-48.92	-40	-8.92	Pass	V
3855.145	150	73	-49.56	-40	-9.56	Pass	V
5819.848	147	168	-47.04	-40	-7.04	Pass	V
6520.215	150	28	-45.68	-40	-5.68	Pass	V

16QAM

Band 40A 38725 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.767	151	14	-52.47	-40	-12.47	Pass	H
1725.326	147	71	-47.42	-40	-7.42	Pass	H
3853.351	150	318	-47.18	-40	-7.18	Pass	H
5927.600	147	56	-45.60	-40	-5.60	Pass	H
6504.487	147	216	-45.87	-40	-5.87	Pass	H
8058.481	151	79	-41.49	-40	-1.49	Pass	H
1191.657	151	65	-56.72	-40	-16.72	Pass	V
1382.403	146	225	-56.67	-40	-16.67	Pass	V
3535.972	149	47	-51.32	-40	-11.32	Pass	V
3855.219	150	73	-48.72	-40	-8.72	Pass	V
5820.288	147	168	-46.41	-40	-6.41	Pass	V
6519.548	150	28	-43.79	-40	-3.79	Pass	V

Band 40A 38750channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.219	151	14	-55.13	-40	-15.13	Pass	H
1725.515	147	71	-48.42	-40	-8.42	Pass	H
3853.334	150	318	-49.40	-40	-9.40	Pass	H
5927.471	147	56	-44.31	-40	-4.31	Pass	H
6505.115	147	216	-45.79	-40	-5.79	Pass	H
8058.086	151	79	-44.66	-40	-4.66	Pass	H
1191.676	151	65	-55.30	-40	-15.30	Pass	V
1382.839	146	225	-60.34	-40	-20.34	Pass	V
3536.732	149	47	-49.61	-40	-9.61	Pass	V
3855.157	150	73	-49.13	-40	-9.13	Pass	V
5820.397	147	168	-44.84	-40	-4.84	Pass	V
6520.099	150	28	-45.27	-40	-5.27	Pass	V

Band 40A 38875 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.957	151	14	-56.39	-40	-16.39	Pass	H
1724.829	147	71	-47.02	-40	-7.02	Pass	H
3853.715	150	318	-47.28	-40	-7.28	Pass	H
5927.644	147	56	-45.41	-40	-5.41	Pass	H
6504.769	147	216	-45.67	-40	-5.67	Pass	H
8058.134	151	79	-42.49	-40	-2.49	Pass	H
1191.956	151	65	-55.38	-40	-15.38	Pass	V
1382.885	146	225	-59.07	-40	-19.07	Pass	V
3536.506	149	47	-48.43	-40	-8.43	Pass	V
3855.103	150	73	-46.86	-40	-6.86	Pass	V
5819.834	147	168	-44.53	-40	-4.53	Pass	V
6519.867	150	28	-45.49	-40	-5.49	Pass	V

Note:

- 1)Scan from 9kHz to 40GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 5.0MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 40B 39175channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.419	151	14	-53.29	-40	-13.29	Pass	H
1725.002	147	71	-49.18	-40	-9.18	Pass	H
3853.744	150	318	-47.90	-40	-7.90	Pass	H
5927.819	147	56	-42.61	-40	-2.61	Pass	H
6504.321	147	216	-45.45	-40	-5.45	Pass	H
8057.906	151	79	-45.82	-40	-5.82	Pass	H
1192.103	151	65	-55.76	-40	-15.76	Pass	V
1382.906	146	225	-59.50	-40	-19.50	Pass	V
3536.597	149	47	-47.28	-40	-7.28	Pass	V
3855.013	150	73	-49.23	-40	-9.23	Pass	V
5820.150	147	168	-45.99	-40	-5.99	Pass	V
6519.973	150	28	-43.67	-40	-3.67	Pass	V

Band 40B 39200 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.146	151	14	-55.20	-40	-15.20	Pass	H
1724.585	147	71	-48.16	-40	-8.16	Pass	H
3853.059	150	318	-49.16	-40	-9.16	Pass	H
5927.212	147	56	-44.11	-40	-4.11	Pass	H
6505.016	147	216	-45.99	-40	-5.99	Pass	H
8058.389	151	79	-44.24	-40	-4.24	Pass	H
1191.350	151	65	-56.06	-40	-16.06	Pass	V
1382.590	146	225	-57.90	-40	-17.90	Pass	V
3536.541	149	47	-49.81	-40	-9.81	Pass	V
3854.836	150	73	-50.50	-40	-10.50	Pass	V
5820.602	147	168	-46.08	-40	-6.08	Pass	V
6519.532	150	28	-45.61	-40	-5.61	Pass	V

Band 40B 39225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.842	151	14	-56.32	-40	-16.32	Pass	H
1725.376	147	71	-50.00	-40	-10.00	Pass	H
3853.166	150	318	-48.30	-40	-8.30	Pass	H
5927.008	147	56	-42.97	-40	-2.97	Pass	H
6505.057	147	216	-46.65	-40	-6.65	Pass	H
8057.886	151	79	-43.23	-40	-3.23	Pass	H
1191.482	151	65	-56.07	-40	-16.07	Pass	V
1382.792	146	225	-57.41	-40	-17.41	Pass	V
3535.788	149	47	-50.44	-40	-10.44	Pass	V
3854.830	150	73	-48.33	-40	-8.33	Pass	V
5819.908	147	168	-45.76	-40	-5.76	Pass	V
6520.258	150	28	-42.72	-40	-2.72	Pass	V

16QAM

Band 40B 39175 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.782	151	14	-52.50	-40	-12.50	Pass	H
1724.682	147	71	-46.78	-40	-6.78	Pass	H
3853.302	150	318	-47.79	-40	-7.79	Pass	H
5927.904	147	56	-43.71	-40	-3.71	Pass	H
6504.489	147	216	-46.52	-40	-6.52	Pass	H
8058.298	151	79	-44.53	-40	-4.53	Pass	H
1191.609	151	65	-57.28	-40	-17.28	Pass	V
1383.141	146	225	-59.74	-40	-19.74	Pass	V
3536.738	149	47	-50.97	-40	-10.97	Pass	V
3854.453	150	73	-47.72	-40	-7.72	Pass	V
5819.930	147	168	-46.45	-40	-6.45	Pass	V
6520.101	150	28	-46.46	-40	-6.46	Pass	V

Band 40B 39200channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.844	151	14	-52.80	-40	-12.80	Pass	H
1724.609	147	71	-46.60	-40	-6.60	Pass	H
3853.838	150	318	-47.18	-40	-7.18	Pass	H
5927.189	147	56	-44.39	-40	-4.39	Pass	H
6504.507	147	216	-44.81	-40	-4.81	Pass	H
8058.128	151	79	-45.12	-40	-5.12	Pass	H
1191.518	151	65	-58.46	-40	-18.46	Pass	V
1382.614	146	225	-58.19	-40	-18.19	Pass	V
3535.964	149	47	-51.44	-40	-11.44	Pass	V
3854.907	150	73	-50.20	-40	-10.20	Pass	V
5820.642	147	168	-47.96	-40	-7.96	Pass	V
6520.247	150	28	-45.13	-40	-5.13	Pass	V

Band 40B 39225 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.060	151	14	-52.93	-40	-12.93	Pass	H
1724.986	147	71	-48.65	-40	-8.65	Pass	H
3853.361	150	318	-47.11	-40	-7.11	Pass	H
5927.340	147	56	-45.89	-40	-5.89	Pass	H
6504.696	147	216	-46.82	-40	-6.82	Pass	H
8058.313	151	79	-44.85	-40	-4.85	Pass	H
1191.331	151	65	-56.16	-40	-16.16	Pass	V
1382.328	146	225	-58.49	-40	-18.49	Pass	V
3536.508	149	47	-48.95	-40	-8.95	Pass	V
3854.766	150	73	-49.40	-40	-9.40	Pass	V
5820.365	147	168	-48.20	-40	-8.20	Pass	V
6520.076	150	28	-43.93	-40	-3.93	Pass	V

Note:

- 1)Scan from 9kHz to 40GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 5.0MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 41 40265 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.025	149	165	-54.261	-25	-29.26	Pass	H
1704.403	146	208	-47.458	-25	-22.46	Pass	H
3901.685	146	4	-43.908	-25	-18.91	Pass	H
5890.630	150	198	-41.854	-25	-16.85	Pass	H
6509.255	146	341	-42.843	-25	-17.84	Pass	H
8081.144	150	235	-42.206	-25	-17.21	Pass	H
1207.252	146	292	-54.890	-25	-29.89	Pass	V
1459.204	150	158	-58.228	-25	-33.23	Pass	V
3541.764	149	55	-52.488	-25	-27.49	Pass	V
3828.927	150	319	-48.580	-25	-23.58	Pass	V
5801.649	146	118	-45.947	-25	-20.95	Pass	V
6558.230	150	155	-45.888	-25	-20.89	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.341	149	165	-55.346	-25	-30.35	Pass	H
1704.019	146	208	-49.041	-25	-24.04	Pass	H
3901.865	146	4	-46.960	-25	-21.96	Pass	H
5889.602	150	198	-41.933	-25	-16.93	Pass	H
6510.126	146	341	-43.699	-25	-18.70	Pass	H
8079.150	150	235	-43.112	-25	-18.11	Pass	H
1205.603	146	292	-54.005	-25	-29.00	Pass	V
1459.731	150	158	-59.050	-25	-34.05	Pass	V
3542.938	149	55	-51.114	-25	-26.11	Pass	V
3828.983	150	319	-48.855	-25	-23.86	Pass	V
5800.934	146	118	-46.328	-25	-21.33	Pass	V
6556.704	150	155	-46.620	-25	-21.62	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.798	149	165	-54.235	-25	-29.24	Pass	H
1704.076	146	208	-46.986	-25	-21.99	Pass	H
3902.422	146	4	-46.609	-25	-21.61	Pass	H
5888.803	150	198	-43.825	-25	-18.82	Pass	H
6510.043	146	341	-43.065	-25	-18.07	Pass	H
8078.215	150	235	-42.662	-25	-17.66	Pass	H
1206.930	146	292	-56.641	-25	-31.64	Pass	V
1459.520	150	158	-59.554	-25	-34.55	Pass	V
3542.981	149	55	-51.763	-25	-26.76	Pass	V
3829.859	150	319	-48.836	-25	-23.84	Pass	V
5800.363	146	118	-46.675	-25	-21.67	Pass	V
6557.630	150	155	-46.430	-25	-21.43	Pass	V

16QAM

Band 41 40365 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.250	149	165	-56.502	-25	-31.50	Pass	H
1702.316	146	208	-49.926	-25	-24.93	Pass	H
3900.545	146	4	-47.618	-25	-22.62	Pass	H
5888.952	150	198	-41.655	-25	-16.65	Pass	H
6509.077	146	341	-43.334	-25	-18.33	Pass	H
8079.276	150	235	-44.109	-25	-19.11	Pass	H
1205.004	146	292	-56.354	-25	-31.35	Pass	V
1461.030	150	158	-58.223	-25	-33.22	Pass	V
3542.603	149	55	-51.061	-25	-26.06	Pass	V
3829.825	150	319	-50.856	-25	-25.86	Pass	V
5800.477	146	118	-48.776	-25	-23.78	Pass	V
6558.651	150	155	-46.735	-25	-21.74	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.527	149	165	-55.678	-25	-30.68	Pass	H
1701.961	146	208	-48.488	-25	-23.49	Pass	H
3901.881	146	4	-44.198	-25	-19.20	Pass	H
5890.719	150	198	-44.573	-25	-19.57	Pass	H
6510.800	146	341	-42.634	-25	-17.63	Pass	H
8079.541	150	235	-46.000	-25	-21.00	Pass	H
1206.976	146	292	-53.877	-25	-28.88	Pass	V
1460.600	150	158	-59.777	-25	-34.78	Pass	V
3542.333	149	55	-49.419	-25	-24.42	Pass	V
3829.156	150	319	-50.547	-25	-25.55	Pass	V
5801.598	146	118	-48.217	-25	-23.22	Pass	V
6557.771	150	155	-48.783	-25	-23.78	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.350	149	165	-55.984	-25	-30.98	Pass	H
1703.300	146	208	-47.648	-25	-22.65	Pass	H
3900.427	146	4	-44.684	-25	-19.68	Pass	H
5889.242	150	198	-43.210	-25	-18.21	Pass	H
6511.172	146	341	-45.147	-25	-20.15	Pass	H
8080.767	150	235	-45.163	-25	-20.16	Pass	H
1205.281	146	292	-55.454	-25	-30.45	Pass	V
1460.033	150	158	-58.071	-25	-33.07	Pass	V
3542.421	149	55	-50.357	-25	-25.36	Pass	V
3829.920	150	319	-49.143	-25	-24.14	Pass	V
5800.599	146	118	-47.026	-25	-22.03	Pass	V
6556.329	150	155	-48.719	-25	-23.72	Pass	V

Note:

- 1)Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

12. FREQUENCY STABILITY

12.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

12.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a

Frequency Domain Analyzer in histogram mode

12.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=DC3.8V; Low Voltage LV=DC3.4V; High Voltage HV=DC4.2V

Please refer to Appendix F: Frequency Stability

Test result: Pass

******* END OF REPORT *******