

TEST REPORT

Applicant: Tanoshi, Inc.

Address of Applicant: 505 14TH ST STE 900 OAKLAND, CA 94612-1902 OAKLAND CA

Manufacturer/Factory: Heyuan Vastking Electronic Co.,Ltd

Address of Manufacturer/Factory: No.13, Hupu Road, PuQian, YuanCheng District, Heyuan, Guangdong, China.

Equipment Under Test (EUT)

Product Name: Tablet PC

Model No.: TTBKB10, TTBKB10-A1V, TTBKB10-A1B

Trade Mark: Tanoshi

FCC ID: 2AWYT-TTBKB10

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: Aug. 21, 2020

Date of Test: Aug. 21, 2020~Sep. 17, 2020

Date of report issue: Sep. 18, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Sep. 18, 2020	Original

Prepared By:




Date:

Sep. 18, 2020

Project Engineer

Check By:



Date:

Sep. 18, 2020

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY.....	7
5.4 TEST LOCATION.....	7
5.5 DESCRIPTION OF SUPPORT UNITS.....	7
5.6 DEVIATION FROM STANDARDS.....	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT:.....	10
7.2 CONDUCTED EMISSIONS	11
7.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	14
7.4 PEAK TRANSMIT POWER.....	28
7.5 POWER SPECTRAL DENSITY	31
7.6 BAND EDGE.....	40
7.7 RADIATED EMISSION.....	44
7.8 FREQUENCY STABILITY	54
8 TEST SETUP PHOTO	58
9 EUT CONSTRUCTIONAL DETAILS.....	58

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	PASS
AC Power Line Conducted Emission	15.207	PASS
Peak Transmit Power	15.407(a)(1)	PASS
Power Spectral Density	15.407(a)(1)	PASS
Undesirable Emission	15.407(b)(6), 15.205/15.209	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.407(b)(1)	PASS
Frequency Stability	15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Tablet PC			
Model No.:	TTBKB10, TTBKB10-A1V, TTBKB10-A1B			
Serial No.:	N/A			
Hardware Version:	EM_T6758_V1.0 P4			
Software Version:	Android 10			
Test sample(s) ID:	GTS202009000070-01			
Sample(s) Status:	Engineer sample			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11a	5180-5240	4
		IEEE 802.11n/ac 20MHz	5180-5240	4
		IEEE 802.11n/ac 40MHz	5190-5230	2
		IEEE 802.11ac 80MHz	5210	1
Modulation technology:	OFDM			
Antenna Type:	FPCB antenna			
Antenna gain:	0dBi			
Power supply:	JML-0500200NZ-LW INPUT: 100-240V~ 50/60Hz 0.5A OUTPUT: DC 5V 2.0A			

Channel list for 802.11a/n(HT20)/ac(HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

Channel list for 802.11n(HT40)/ac(HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz				

Channel list for 802.11ac(HT80)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210MHz						

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	
<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a/n/ac(HT20)	6/6.5 Mbps
802.11n/ac(HT40)	13.5 Mbps
802.11ac(HT80)	29.3 Mbps

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

None.

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V- NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik- Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p><i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>	
E.U.T Antenna:	
<p><i>The antennas are integral antenna, the best case gain of the antennas are 0 dBi, reference to the appendix II for details</i></p>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</p>																
Test setup:	<p>Reference Plane</p> <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test Instruments:	Refer to section 5.10 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar											
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																


Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:
Line:

100.0 dBuV

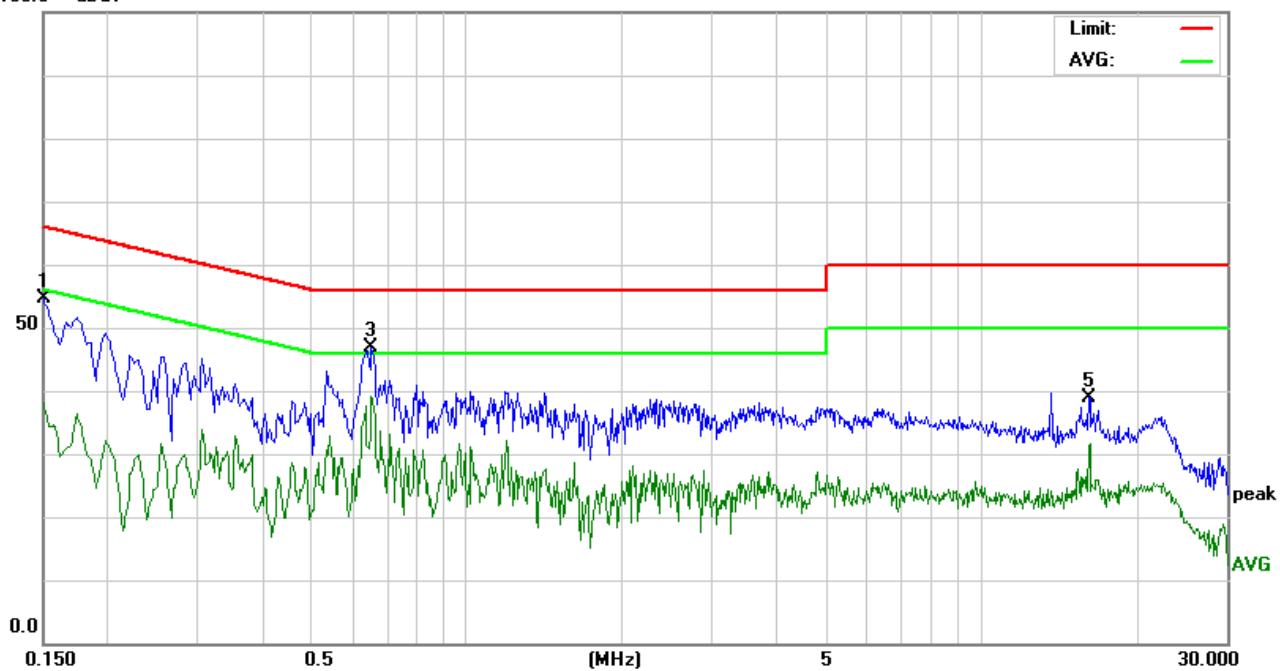

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	50.57	4.03	54.60	65.99	-11.39	peak
2		0.1500	34.08	4.03	38.11	55.99	-17.88	AVG
3		0.6540	36.95	9.95	46.90	56.00	-9.10	peak
4	*	0.6540	29.15	9.95	39.10	46.00	-6.90	AVG
5		16.1700	37.65	1.35	39.00	60.00	-21.00	peak
6		16.2300	30.19	1.36	31.55	50.00	-18.45	AVG

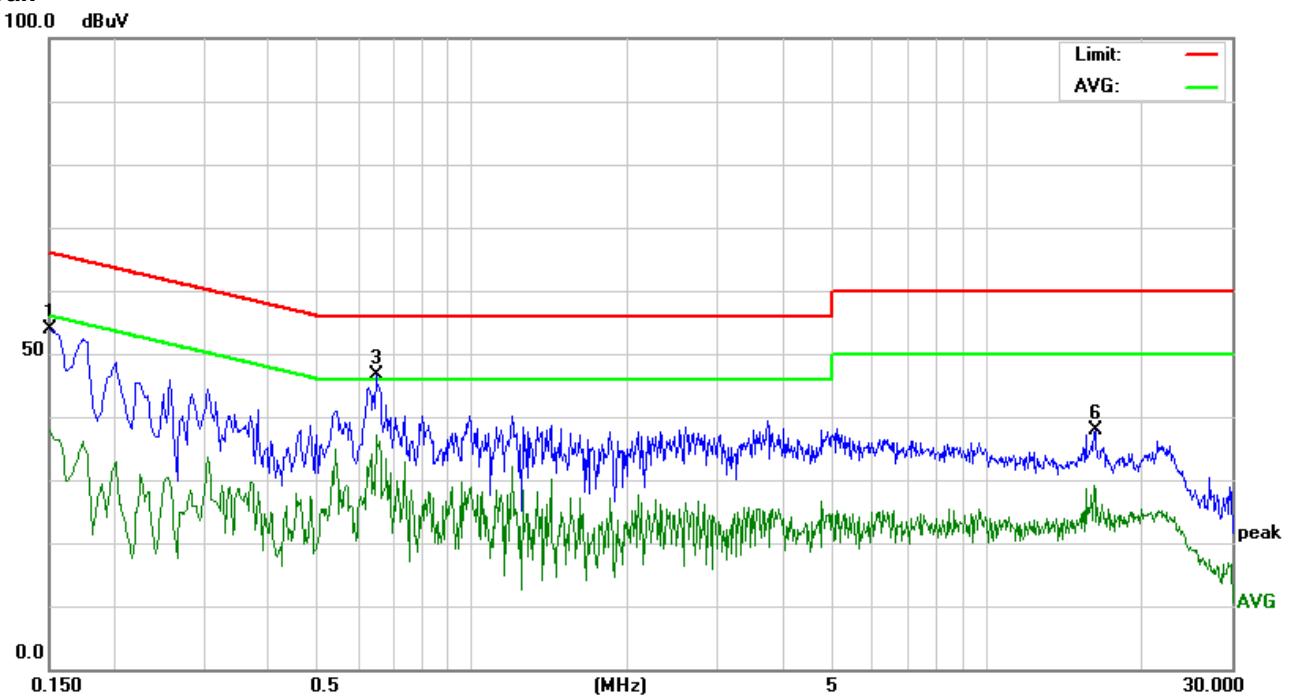
Neutral:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1500	0.1500	49.88	4.03	53.91	65.99	-12.08	peak
2	0.1500	0.1500	33.88	4.03	37.91	55.99	-18.08	AVG
3	0.6500	0.6500	36.78	9.95	46.73	56.00	-9.27	peak
4	*	0.6500	27.10	9.95	37.05	46.00	-8.95	AVG
5	16.1700	16.1700	27.85	1.35	29.20	50.00	-20.80	AVG
6	16.2300	16.2300	36.44	1.36	37.80	60.00	-22.20	peak

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth and 99% Occupied Bandwidth

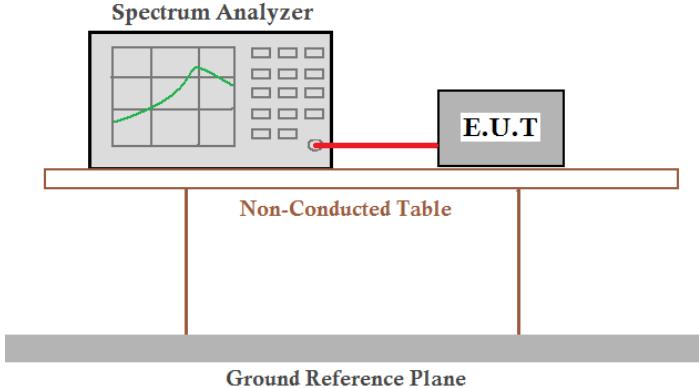Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)			26dB Occupied Bandwidth (MHz)		
		802.11a	802.11n(HT 20)	802.11ac(H T20)	802.11a	802.11n(HT 20)	802.11ac(H T20)
36	5180	16.7150	17.6350	17.5750	20.2912	20.3300	20.3712
44	5220	16.7150	17.5988	17.5650	20.2987	20.3262	20.3125
48	5240	16.7575	17.5713	17.5575	20.3000	20.3337	20.3787

CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Occupied Bandwidth (MHz)	
		802.11n(HT40)	802.11ac(HT40)	802.11n(HT40)	802.11ac(HT40)
38	5190	36.1475	36.0075	40.6775	40.4525
46	5230	36.1000	35.9800	40.4300	40.5700


CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Occupied Bandwidth (MHz)	
		802.11ac(HT80)		802.11ac(HT80)	
42	5210	75.1163		81.0712	


Test plots as followed:


99% Occupied Bandwidth






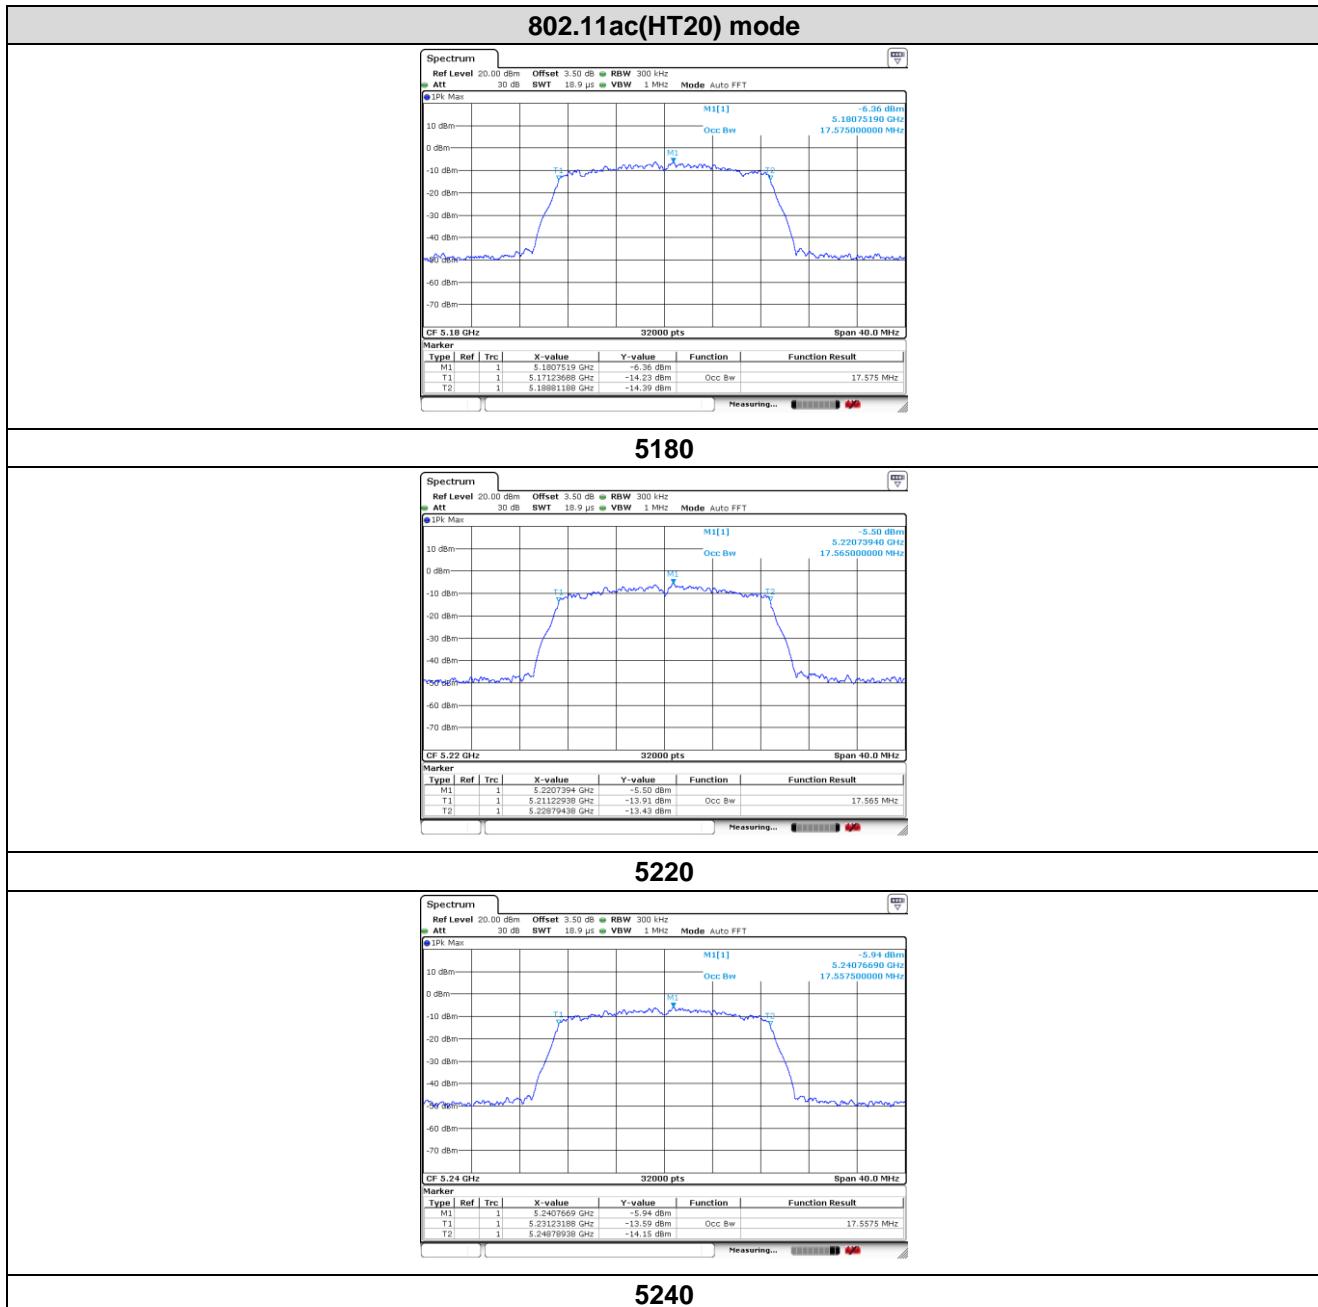

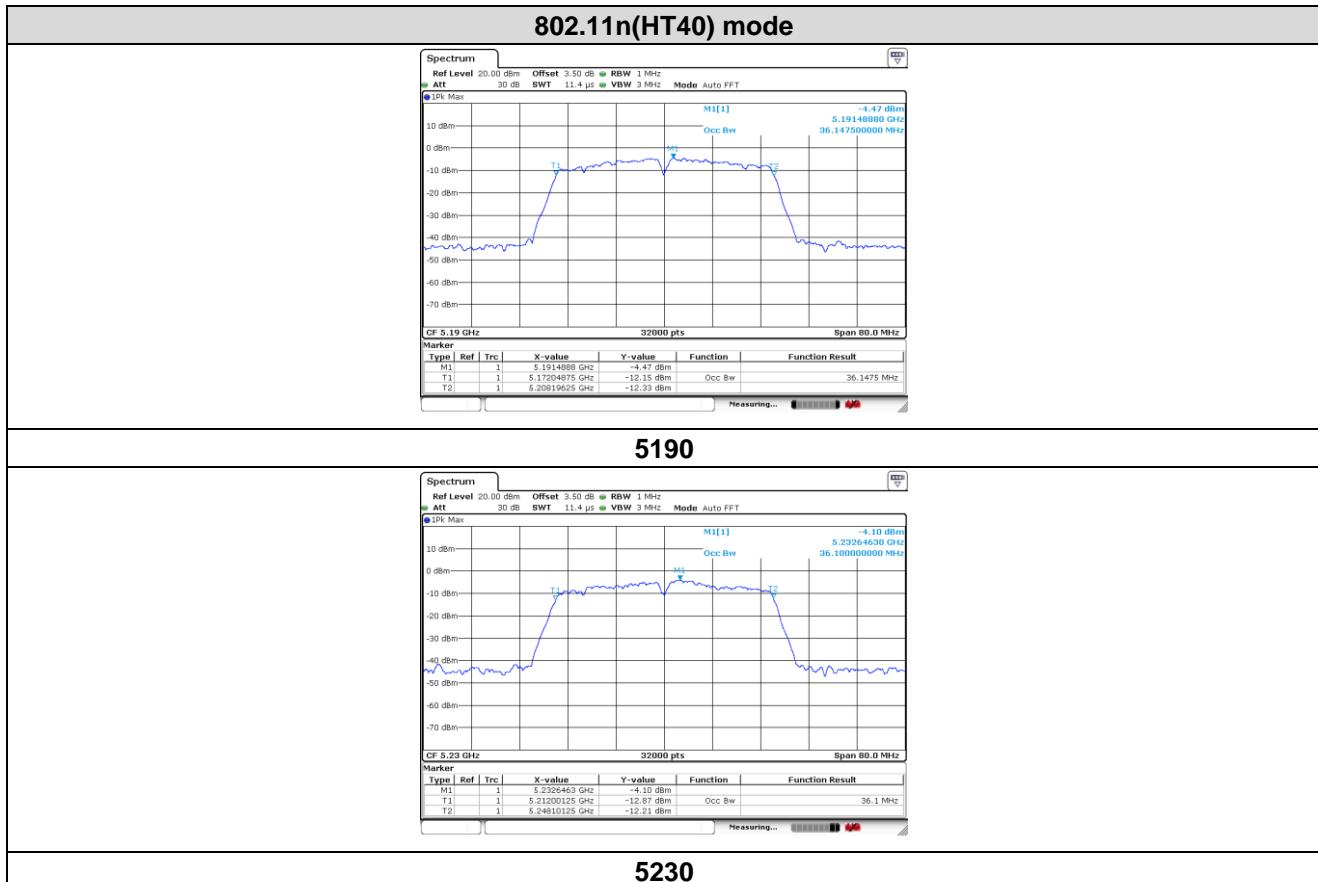

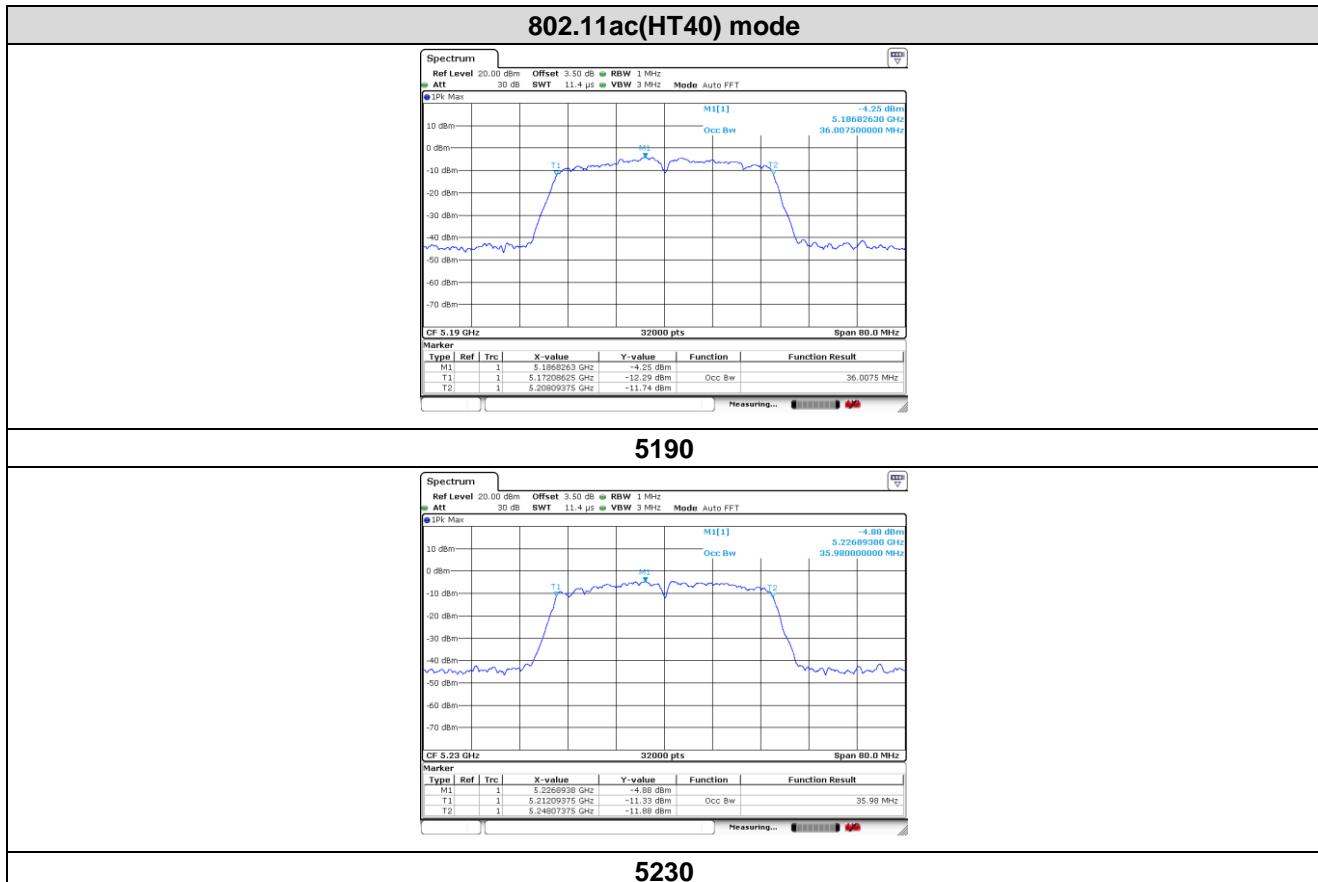

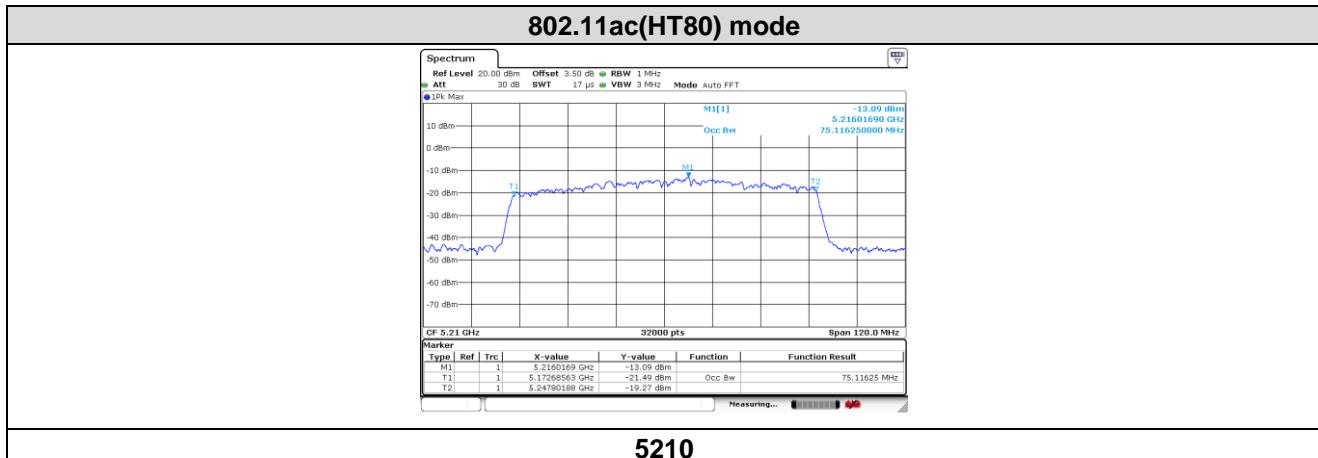


26dB Occupied Bandwidth


802.11a mode



5180

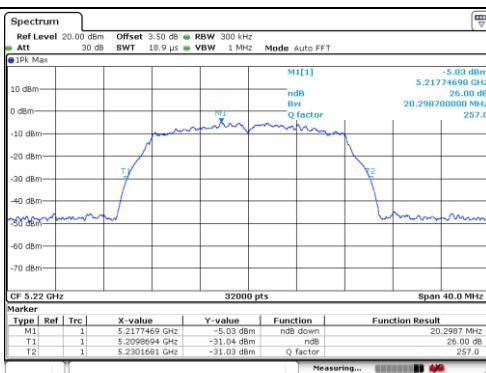



5220

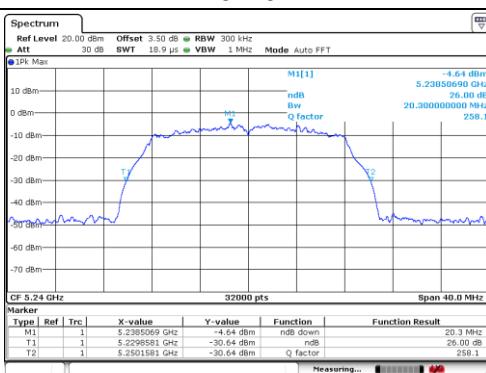



5240



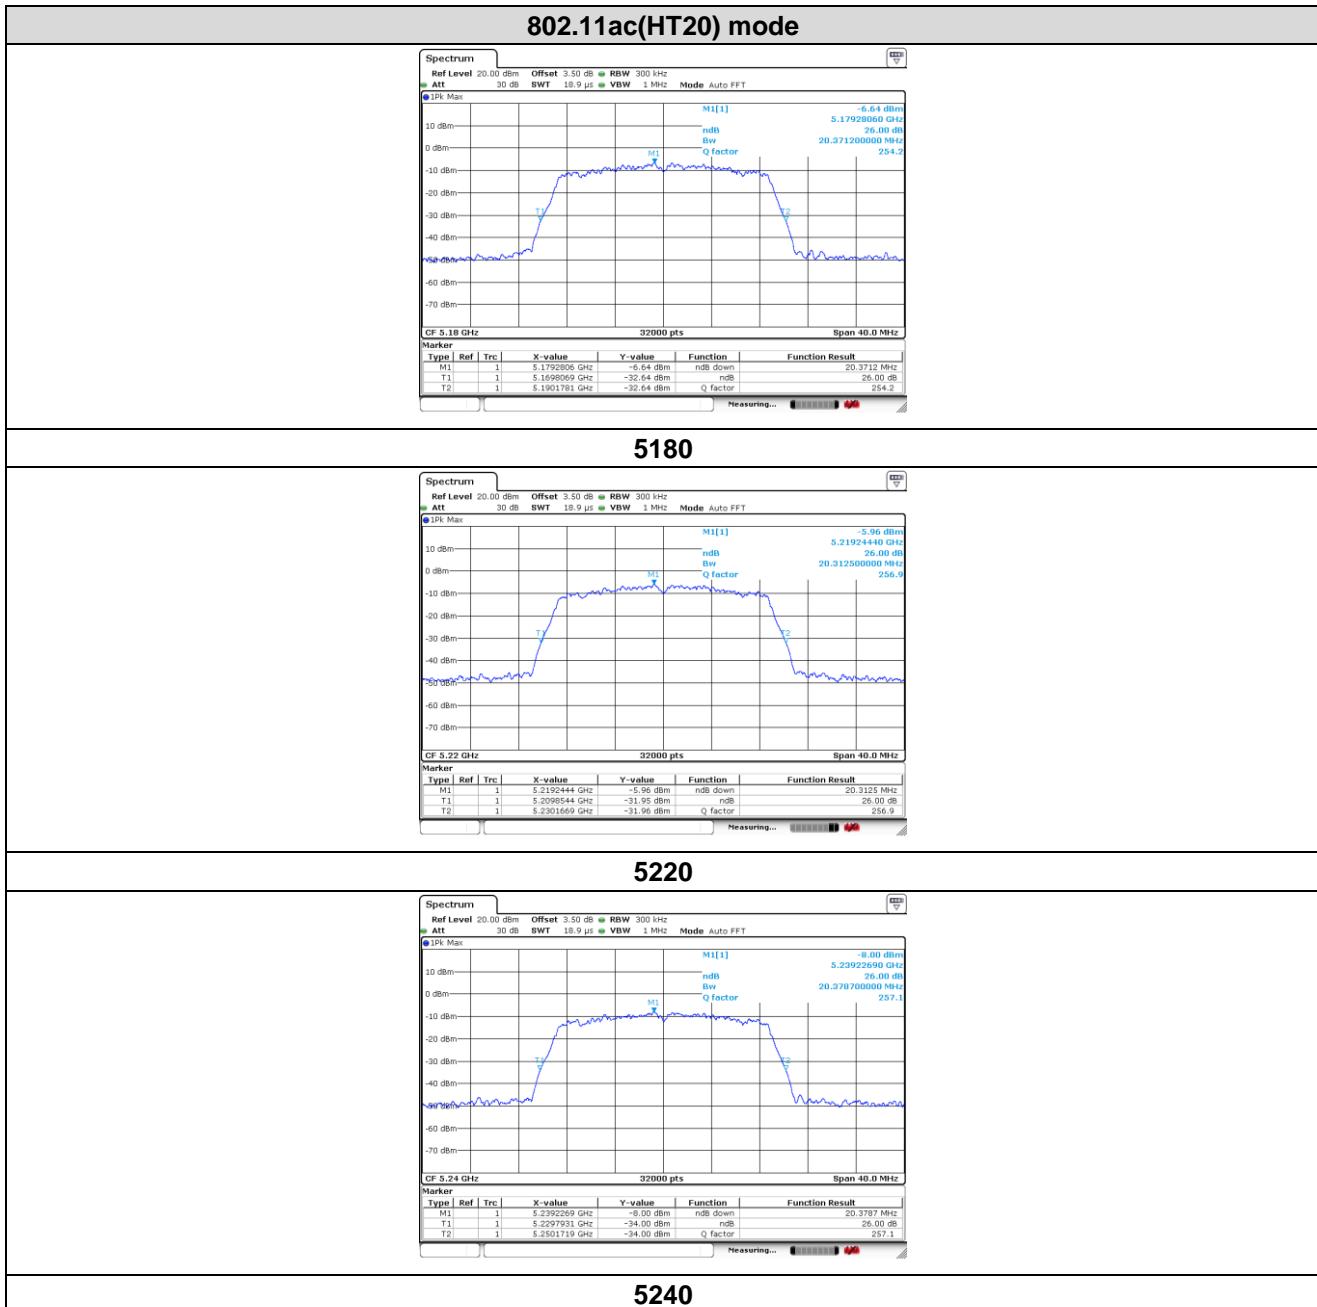


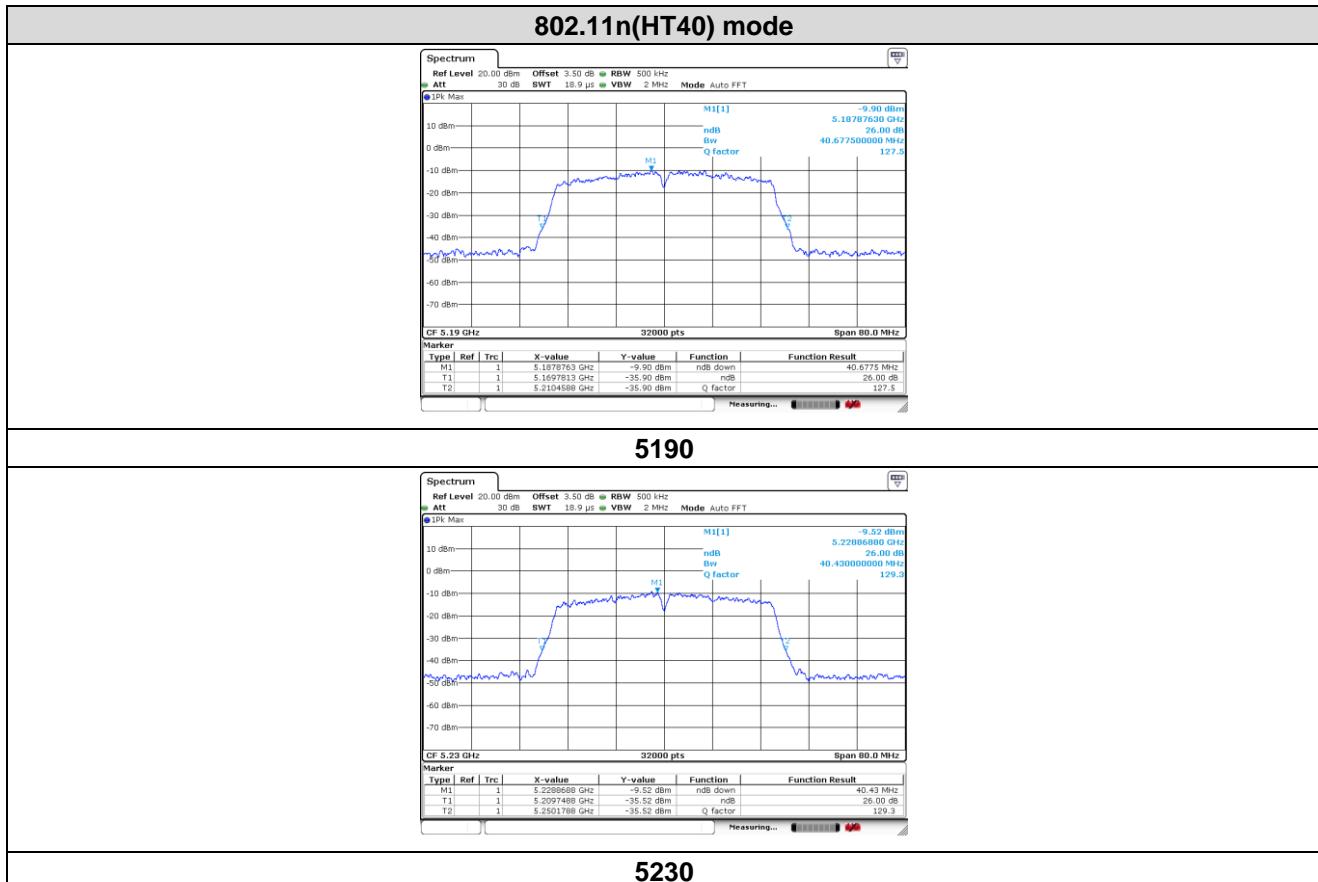

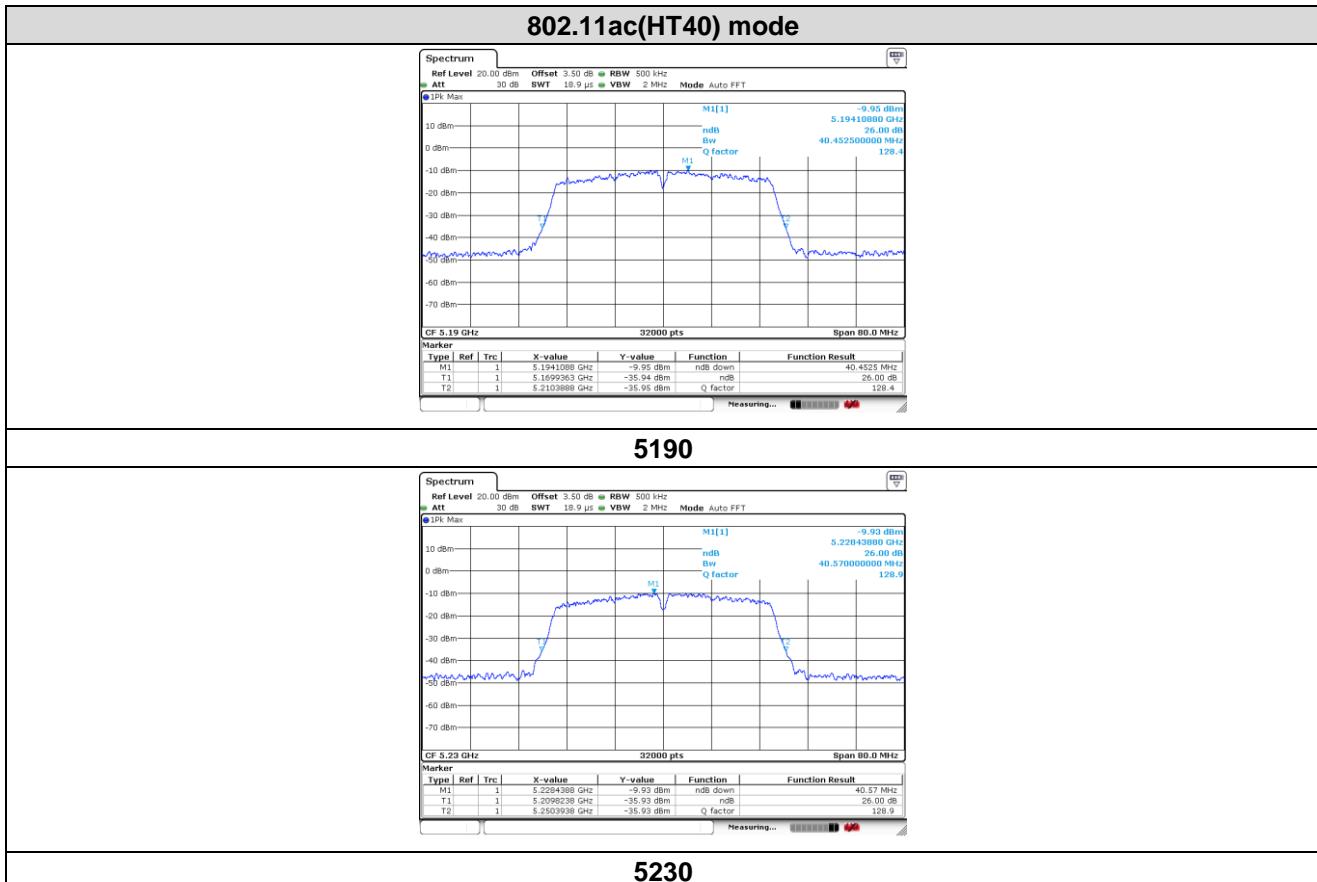

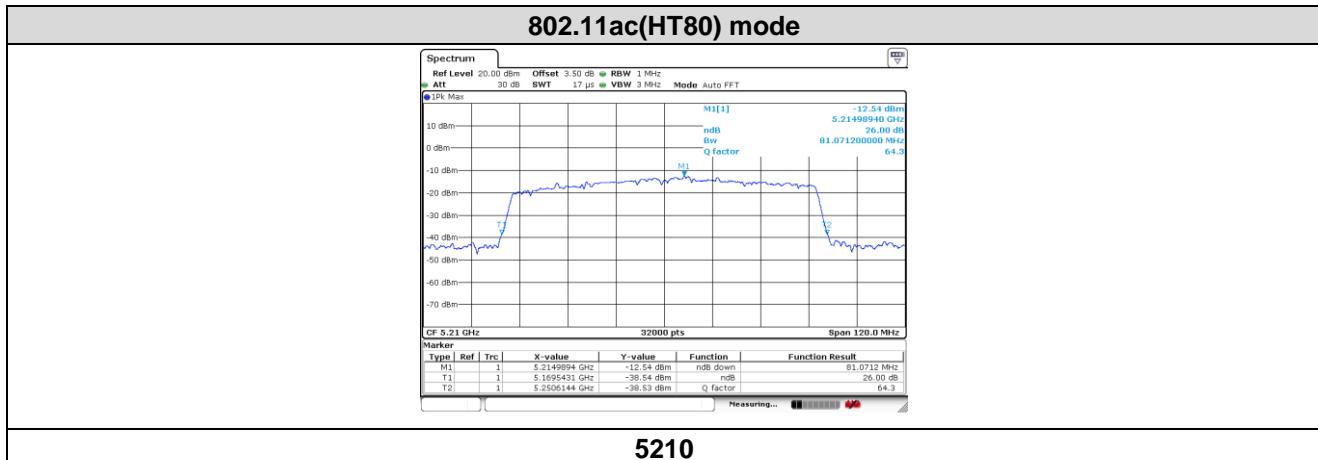

7.4 Peak Transmit Power

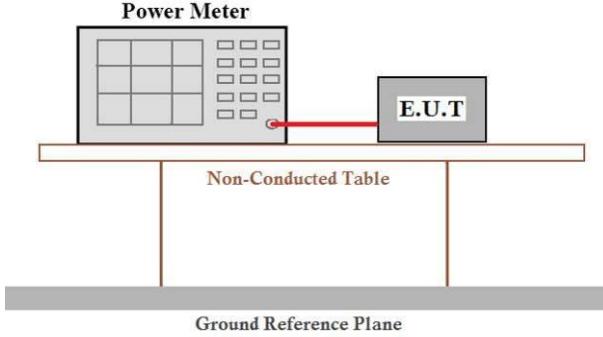Test Requirement:	FCC Part15 E Section 15.407								
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01								
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 1\text{W}(30\text{dBm})$ for master device $\leq 250\text{mW}(23.98\text{dBm})$ for client device </td> </tr> <tr> <td>5250-5350</td> <td> $\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$ </td> </tr> <tr> <td>5470-5725</td> <td> $\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$ </td> </tr> </tbody> </table> <p>Remark: *Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>	Frequency band (MHz)	Limit	5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device $\leq 250\text{mW}(23.98\text{dBm})$ for client device	5250-5350	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$	5470-5725	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
Frequency band (MHz)	Limit								
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device $\leq 250\text{mW}(23.98\text{dBm})$ for client device								
5250-5350	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$								
5470-5725	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$								
Test setup:									
Test procedure:	<p>Measurement using an RF average power meter</p> <p>(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied</p> <ul style="list-style-type: none"> a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. <p>(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).</p> <p>(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.</p> <p>(iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10\log(1/0.25)$ if the duty cycle is 25 percent).</p>								
Test Instruments:	Refer to section 5.10 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Measurement Data

Modulation	Duty cycle	Duty Factor
802.11a	≥98 %	No require
802.11n(HT20)	≥98 %	No require
802.11n(HT40)	≥98 %	No require
802.11ac(HT20)	≥98 %	No require
802.11ac(HT40)	≥98 %	No require
802.11ac(HT80)	≥98 %	No require

802.11a mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
36	5180	-1.25	/	-1.25	24	Pass
44	5220	-1.26	/	-1.26	24	Pass
48	5240	-1.22	/	-1.22	24	Pass

802.11n(HT20) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
36	5180	-1.47	/	-1.47	24	Pass
44	5220	-1.32	/	-1.32	24	Pass
48	5240	-1.36	/	-1.36	24	Pass

802.11ac(HT20) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
36	5180	-1.26	/	-1.26	24	Pass
44	5220	-1.23	/	-1.23	24	Pass
48	5240	-1.20	/	-1.20	24	Pass

802.11n(HT40) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
38	5190	-1.19	/	-1.19	24	Pass
46	5230	-1.43	/	-1.43	24	Pass


802.11 ac(HT40) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
38	5190	-1.13	/	-1.13	24	Pass
46	5230	-1.38	/	-1.38	24	Pass

802.11 ac(HT80)						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
42	5210	-1.47	/	-1.47	24	Pass

Note: Output Power = Measured Power + Duty Factor

Duty Factor = $10 \log (1/\text{Duty Cycle})$

7.5 Power Spectral Density

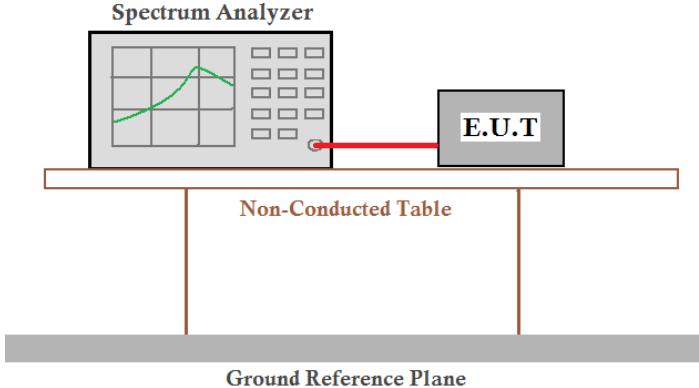Test Requirement:	FCC Part15 E Section 15.407								
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01								
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> </tbody> </table> <p>Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</p>	Frequency band (MHz)	Limit	5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device	5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device	5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device
Frequency band (MHz)	Limit								
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device								
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device								
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device								
Test setup:									
Test procedure:	<ol style="list-style-type: none"> 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: <ol style="list-style-type: none"> a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD. 								
Test Instruments:	Refer to section 5.10 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Measurement Data

Modulation	Duty cycle	Duty Factor
802.11a	≥98 %	No require
802.11n(HT20)	≥98 %	No require
802.11n(HT40)	≥98 %	No require
802.11ac(HT20)	≥98 %	No require
802.11ac(HT40)	≥98 %	No require
802.11ac(HT80)	≥98 %	No require

802.11a mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
36	5180	-0.55	/	-0.55	11	Pass
44	5220	0.01	/	0.01	11	Pass
48	5240	0.07	/	0.07	11	Pass

802.11n(HT20) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
36	5180	-0.81	/	-0.81	11	Pass
44	5220	-1.26	/	-1.26	11	Pass
48	5240	-0.11	/	-0.11	11	Pass

802.11ac(HT20) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
36	5180	-0.97	/	-0.97	11	Pass
44	5220	-0.99	/	-0.99	11	Pass
48	5240	-0.37	/	-0.37	11	Pass

802.11n(HT40) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
38	5190	-4.43	/	-4.43	11	Pass
46	5230	-3.99	/	-3.99	11	Pass


802.11 ac(HT40) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
38	5190	-4.56	/	-4.56	11	Pass
46	5230	-3.94	/	-3.94	11	Pass


802.11 ac(HT80)						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
42	5210	-13.02	/	-13.02	11	Pass


Note: Output Power = Measured Power + Duty Factor


Duty Factor = $10 \log (1/\text{Duty Cycle})$


Test plots as followed:

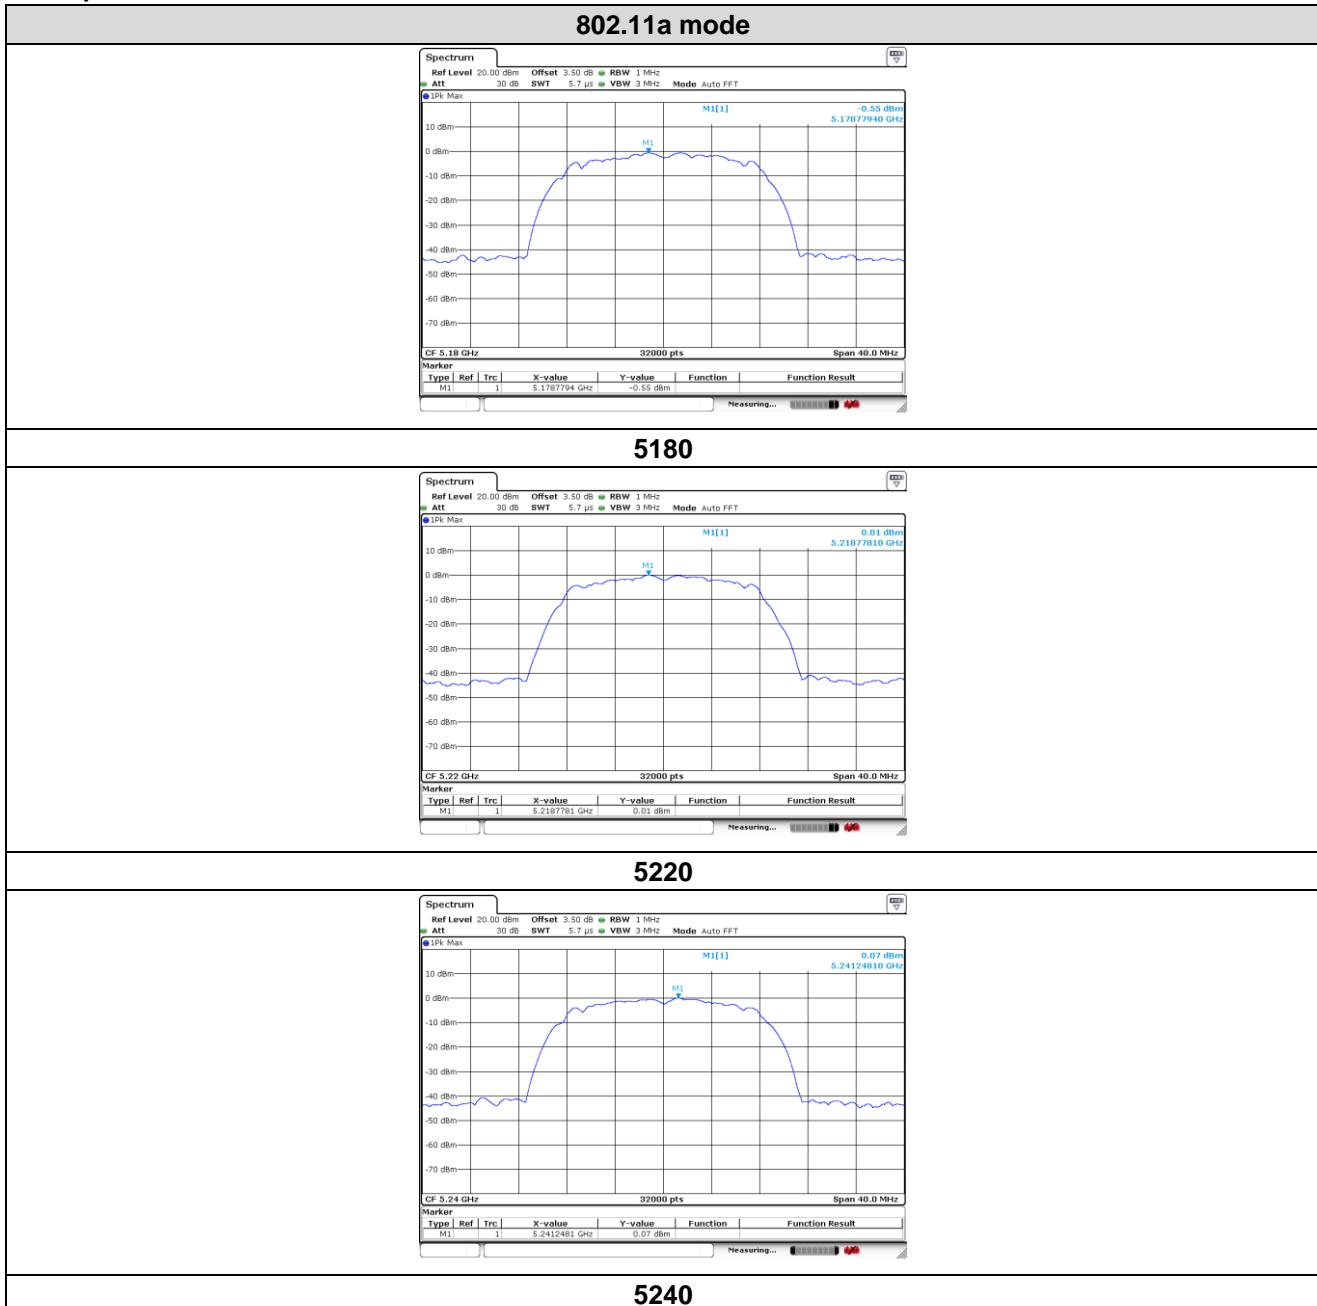


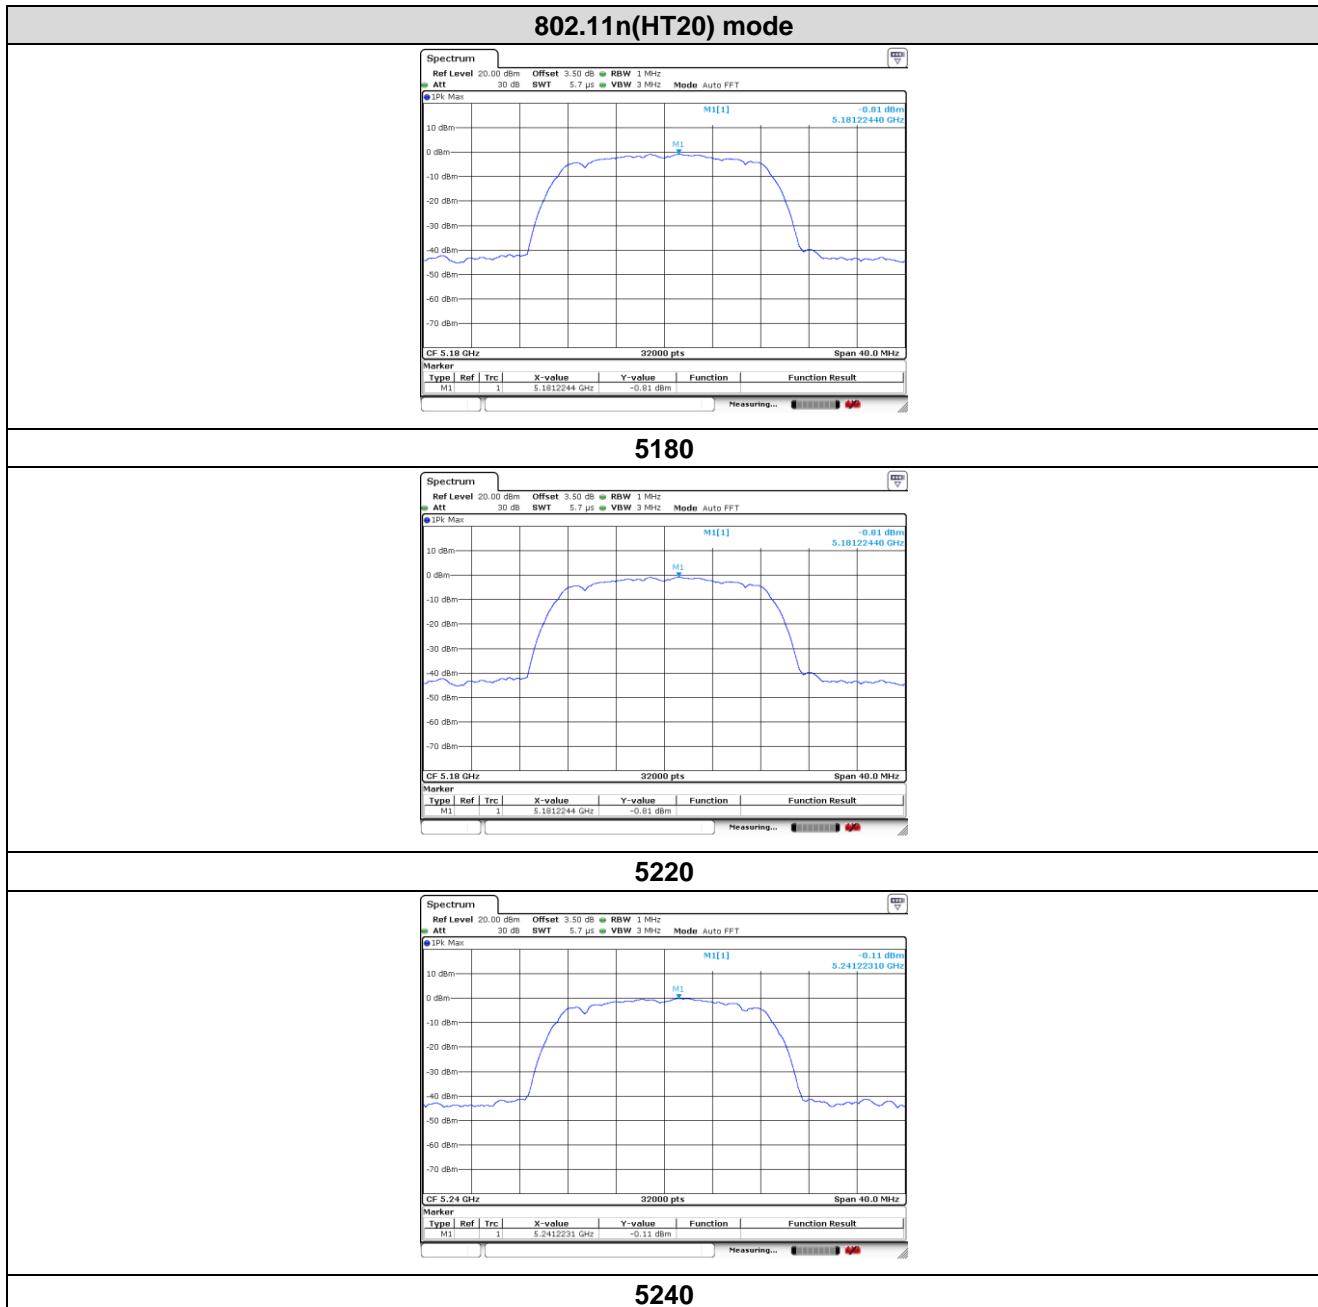

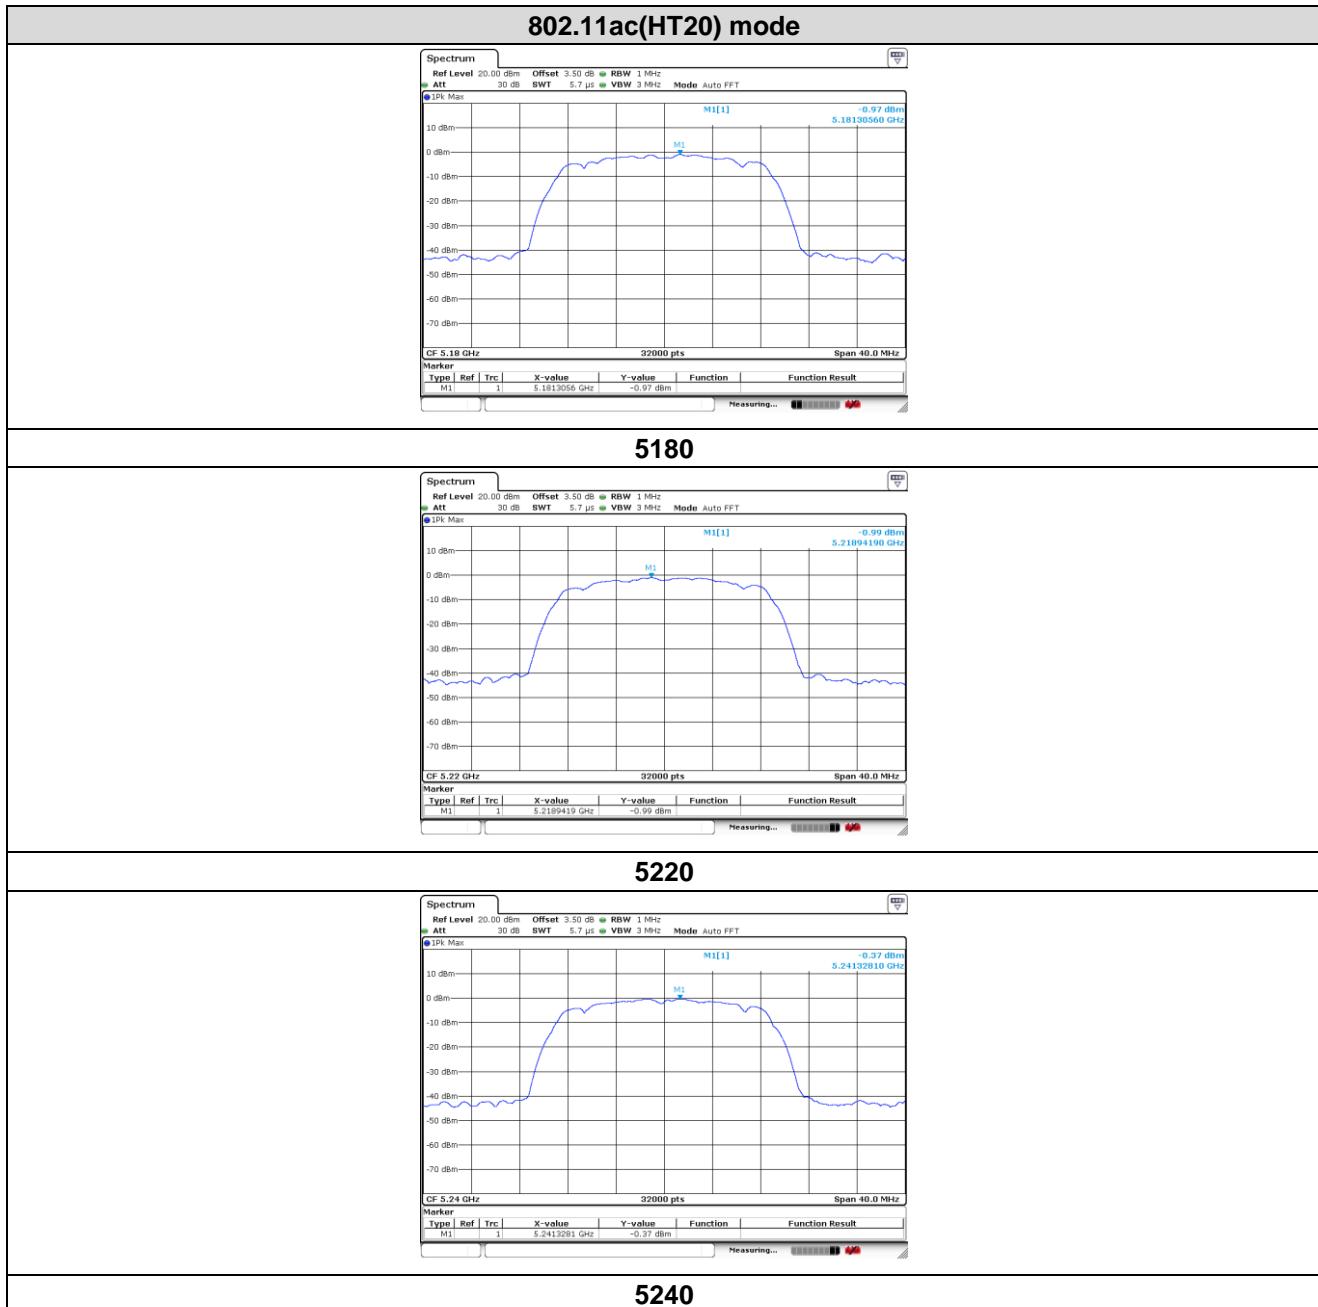

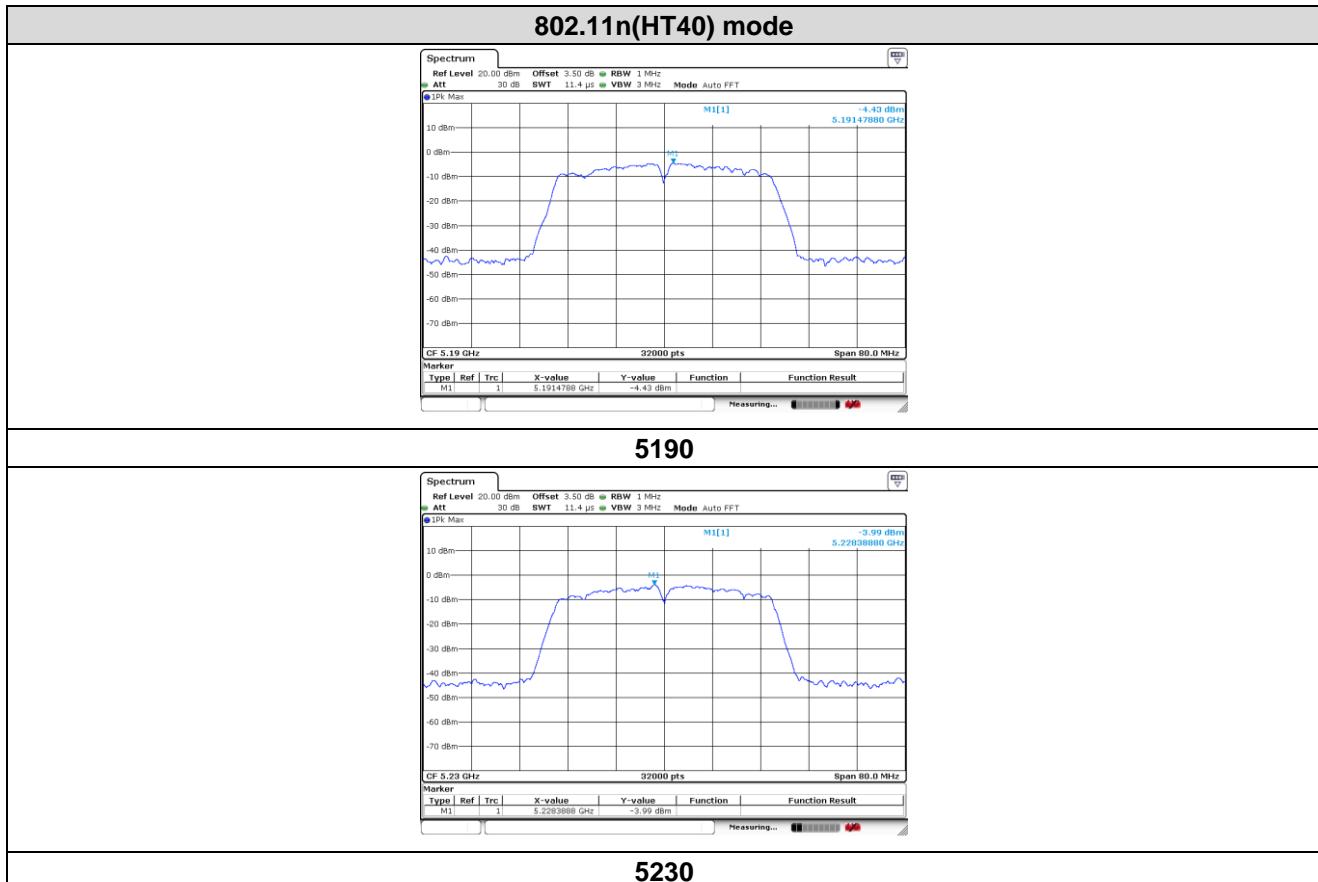


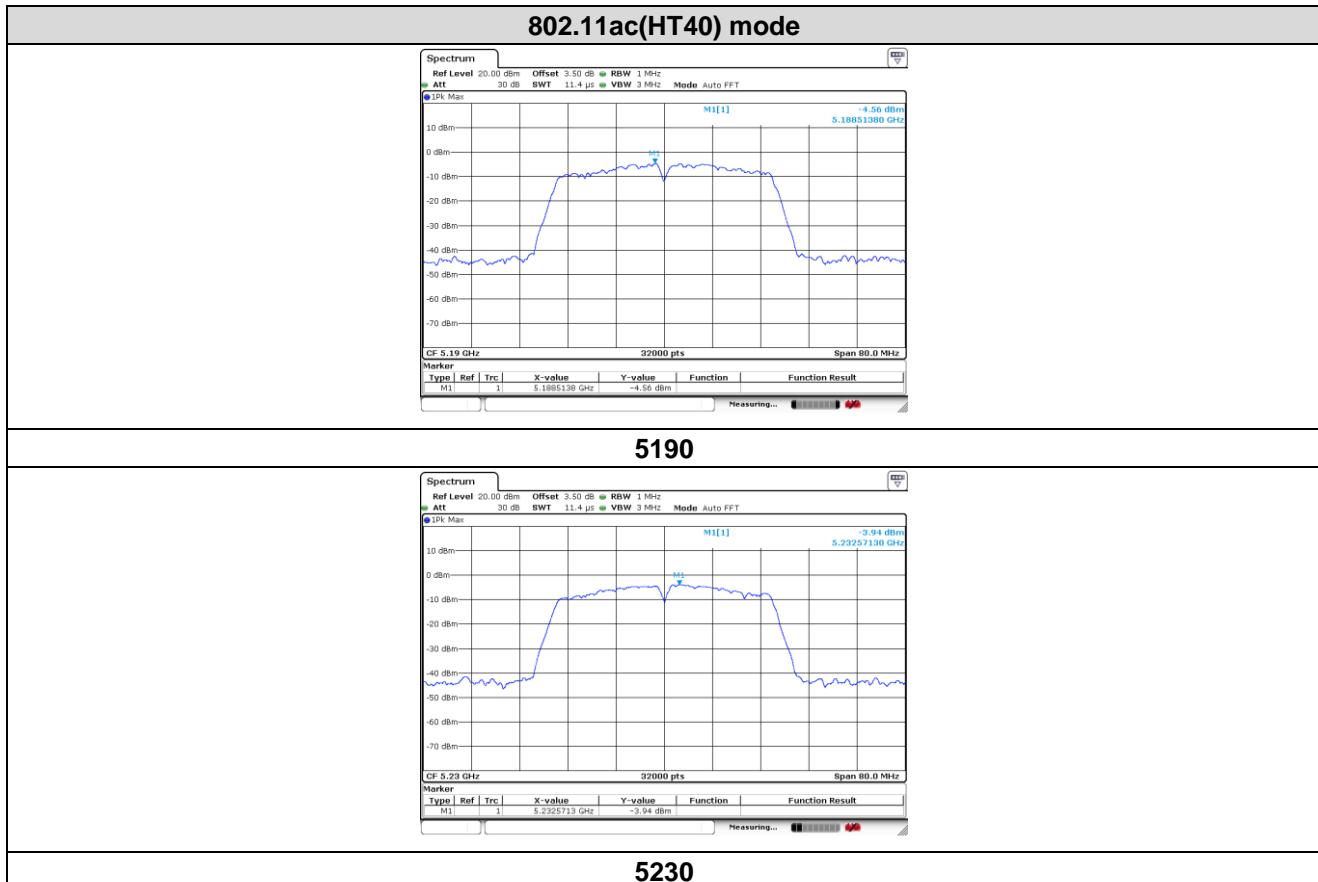

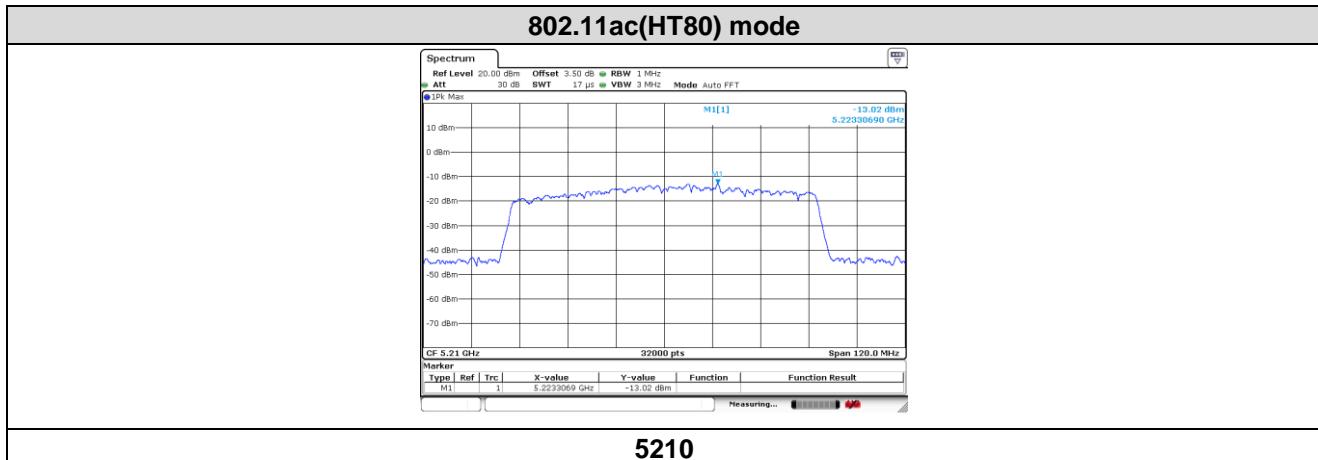

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205																									
Test Method:	ANSI C63.10:2013																									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td></td><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value		AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																						
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																						
Above 1GHz	Peak	1MHz	3MHz	Peak Value																						
	AV	1MHz	3MHz	Average Value																						
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td></td><td>68.2</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value		68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																								
30MHz-88MHz	40.0	Quasi-peak Value																								
88MHz-216MHz	43.5	Quasi-peak Value																								
216MHz-960MHz	46.0	Quasi-peak Value																								
960MHz-1GHz	54.0	Quasi-peak Value																								
Above 1GHz	54.0	Average Value																								
	68.2	Peak Value																								
	<p>Undesirable emission limits:</p> <ol style="list-style-type: none"> (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. 																									
Test Procedure:	<ol style="list-style-type: none"> a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not 																									

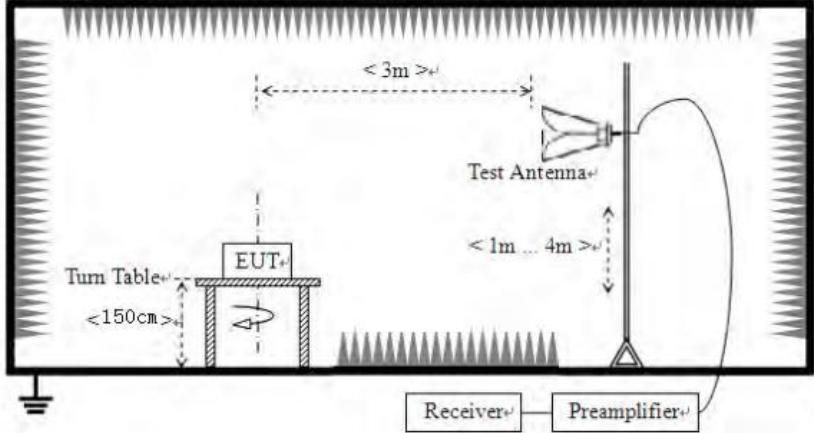	have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	For radiated emissions above 1GHz
	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Only the worst case Main Antenna test data.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
 For example, if EIRP = -27dBm
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$

Measurement Data:
802.11a(HT20)

Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	52.62	4.78	57.40	68.20	CH36
5150.000	H	55.97	4.78	60.75	68.20	CH36
5350.000	V	41.73	4.30	46.03	68.20	CH48
5350.000	H	42.56	4.30	46.86	68.20	CH48

802.11n(HT20)

Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	52.24	4.78	57.02	68.20	CH36
5150.000	H	53.68	4.78	58.46	68.20	CH36
5350.000	V	40.99	4.30	45.29	68.20	CH48
5350.000	H	43.17	4.30	47.47	68.20	CH48

802.11ac(HT20)

Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	53.04	4.78	57.82	68.20	CH36
5150.000	H	55.60	4.78	60.38	68.20	CH36
5350.000	V	40.39	4.30	44.69	68.20	CH48
5350.000	H	41.53	4.30	45.83	68.20	CH48

802.11n(HT40)

Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	56.12	4.78	60.90	68.20	CH38
5150.000	H	57.82	4.78	62.60	68.20	CH38
5350.000	V	39.44	4.30	43.74	68.20	CH46
5350.000	H	42.63	4.30	46.93	68.20	CH46

802.11ac(HT40)


Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	55.92	4.78	60.70	68.20	CH38
5150.000	H	56.52	4.78	61.30	68.20	CH38
5350.000	V	39.75	4.30	44.05	68.20	CH46
5350.000	H	42.11	4.30	46.41	68.20	CH46


802.11ac(HT80)

Freq. (MHz) (Peak)	Ant.Pol. H/V	Reading	Ant/CF	Act	Limit	Note
		Peak (dBuv)	Peak (dB)	Peak (dBuv/m)	Peak (dBuv/m)	
5150.000	V	52.52	4.78	57.30	68.20	CH42
5350.000	V	41.97	4.30	46.27	68.20	CH42
5150.000	H	54.92	4.78	59.70	68.20	CH42
5350.000	H	44.24	4.30	48.54	68.20	CH42


7.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																																					
Test Method:	ANSI C63.10:2013																																					
Test Frequency Range:	9kHz to 40GHz																																					
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																																					
Receiver setup:	Frequency	Detector	RBW	VBW	Value																																	
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																	
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																																	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																																	
		AV	1MHz	3MHz	Average Value																																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (uV/m)</th><th>Value</th><th>Measurement Distance</th></tr> </thead> <tbody> <tr> <td>0.009MHz-0.490MHz</td><td>2400/F(KHz)</td><td>QP</td><td>300m</td></tr> <tr> <td>0.490MHz-1.705MHz</td><td>24000/F(KHz)</td><td>QP</td><td>300m</td></tr> <tr> <td>1.705MHz-30MHz</td><td>30</td><td>QP</td><td>30m</td></tr> <tr> <td>30MHz-88MHz</td><td>100</td><td>QP</td><td rowspan="7">3m</td></tr> <tr> <td>88MHz-216MHz</td><td>150</td><td>QP</td></tr> <tr> <td>216MHz-960MHz</td><td>200</td><td>QP</td></tr> <tr> <td>960MHz-1GHz</td><td>500</td><td>QP</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>500</td><td>Average</td></tr> <tr> <td>5000</td><td>Peak</td></tr> </tbody> </table>				Frequency	Limit (uV/m)	Value	Measurement Distance	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	1.705MHz-30MHz	30	QP	30m	30MHz-88MHz	100	QP	3m	88MHz-216MHz	150	QP	216MHz-960MHz	200	QP	960MHz-1GHz	500	QP	Above 1GHz	500	Average	5000	Peak
Frequency	Limit (uV/m)	Value	Measurement Distance																																			
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m																																			
0.490MHz-1.705MHz	24000/F(KHz)	QP	300m																																			
1.705MHz-30MHz	30	QP	30m																																			
30MHz-88MHz	100	QP	3m																																			
88MHz-216MHz	150	QP																																				
216MHz-960MHz	200	QP																																				
960MHz-1GHz	500	QP																																				
Above 1GHz	500	Average																																				
	5000	Peak																																				
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1>.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>2>.Above 1GHz test procedure:</p>																																					

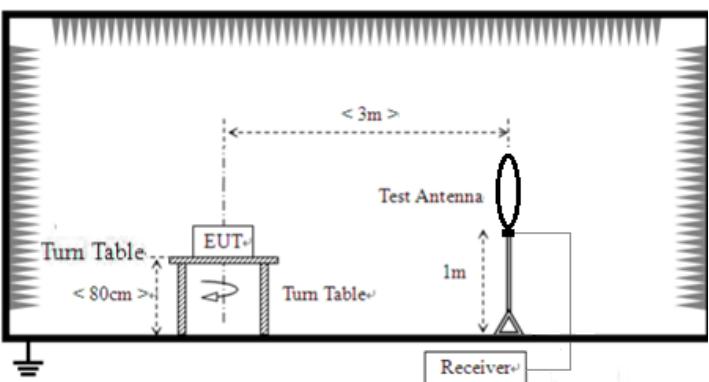	<ol style="list-style-type: none"> 1. On the test site as test setup graph above, the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>

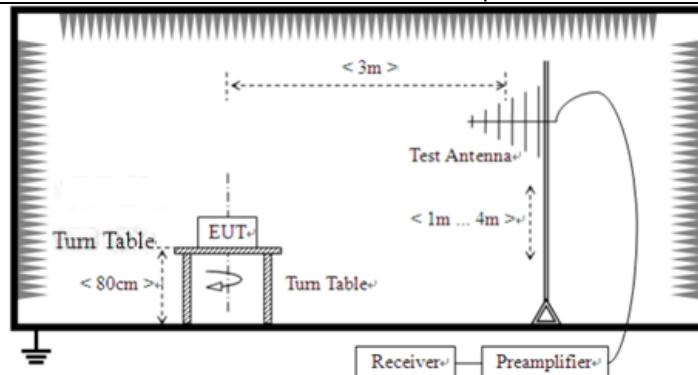

For radiated emissions above 1GHz

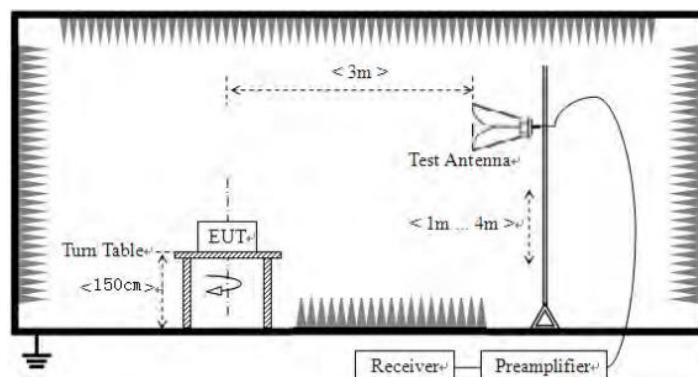

Test Instruments:	Refer to section 5.10 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:


1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:
9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30MHz~1GHz
Horizontal:


80.0 dBuV

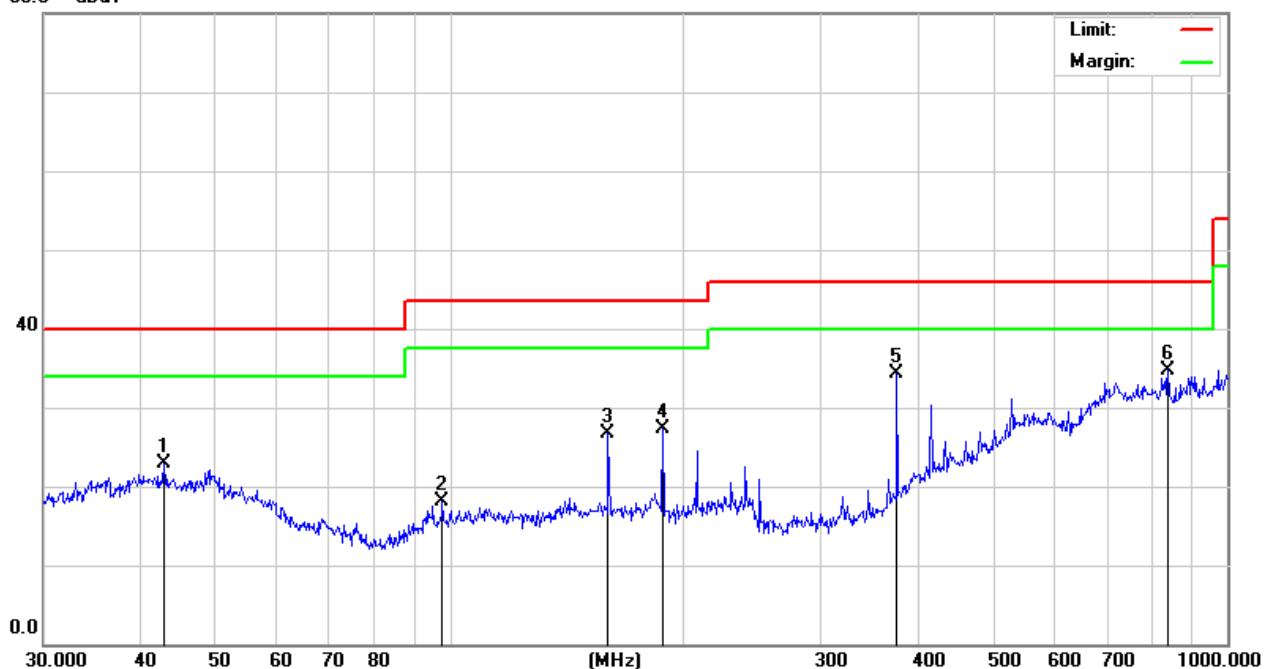

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV	dBuV	Detector
1		42.8998	24.83	-2.00	22.83	40.00	-17.17 peak
2		97.7983	26.14	-8.07	18.07	43.50	-25.43 peak
3		159.7844	33.17	-6.54	26.63	43.50	-16.87 peak
4		187.7530	34.24	-6.85	27.39	43.50	-16.11 peak
5		375.9385	39.32	-5.07	34.25	46.00	-11.75 peak
6	*	839.1818	28.13	6.57	34.70	46.00	-11.30 peak

Vertical:

80.0 dBuV

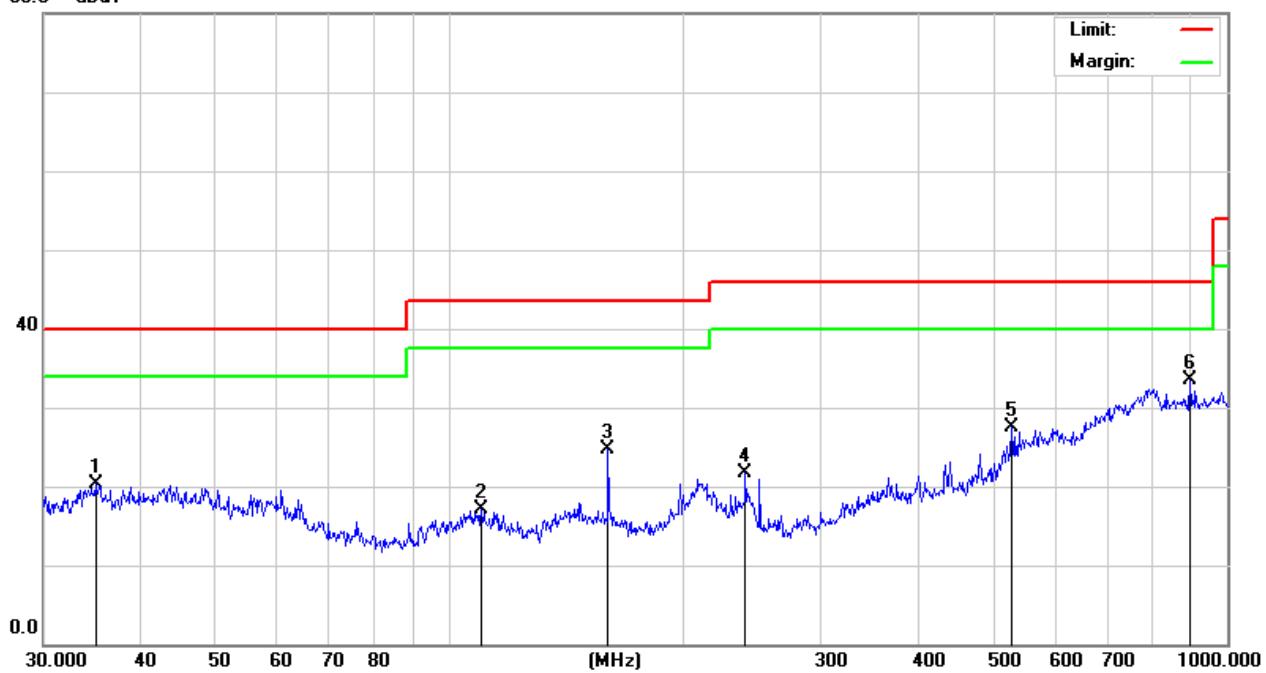

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		35.0048	25.19	-4.80	20.39	40.00	-19.61	peak
2		109.7960	24.65	-7.64	17.01	43.50	-26.49	peak
3		159.7844	33.39	-8.61	24.78	43.50	-18.72	peak
4		239.9874	28.22	-6.52	21.70	46.00	-24.30	peak
5		528.2458	27.14	0.32	27.46	46.00	-18.54	peak
6	*	896.9965	27.43	6.06	33.49	46.00	-12.51	peak

Above 1GHz:

802.11a(HT20) 5180MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10360	34.01	12.56	46.57	74.00	-27.43	PK
V	15540	35.57	16.45	52.02	74.00	-21.98	PK
H	10360	35.31	12.56	47.87	74.00	-26.13	PK
H	15540	36.77	16.45	53.22	74.00	-20.78	PK

802.11a(HT20) 5220MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10440	35.76	12.64	48.40	74.00	-25.60	PK
V	15660	35.36	16.53	51.89	74.00	-22.11	PK
H	10440	37.06	12.64	49.70	74.00	-24.30	PK
H	15660	35.85	16.53	52.38	74.00	-21.62	PK

802.11a(HT20) 5240MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10480	33.01	12.68	45.69	74.00	-28.31	PK
V	15720	35.22	16.54	51.76	74.00	-22.24	PK
H	10480	35.73	12.68	48.41	74.00	-25.59	PK
H	15720	33.83	16.54	50.37	74.00	-23.63	PK

802.11n(HT20) 5180MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10360	32.59	12.56	45.15	74.00	-28.85	PK
V	15540	34.78	16.45	51.23	74.00	-22.77	PK
H	10360	35.85	12.56	48.41	74.00	-25.59	PK
H	15540	36.14	16.45	52.59	74.00	-21.41	PK

802.11n(HT20) 5220MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10440	35.09	12.64	47.73	74.00	-26.27	PK
V	15660	32.94	16.53	49.47	74.00	-24.53	PK
H	10440	35.77	12.64	48.41	74.00	-25.59	PK
H	15660	35.30	16.53	51.83	74.00	-22.17	PK

802.11n(HT20) 5240MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10480	34.57	12.68	47.25	74.00	-26.75	PK
V	15720	31.85	16.54	48.39	74.00	-25.61	PK
H	10480	34.02	12.68	46.70	74.00	-27.30	PK
H	15720	33.55	16.54	50.09	74.00	-23.91	PK

802.11ac(HT20) 5180MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10360	33.77	12.56	46.33	74.00	-27.67	PK
V	15540	34.34	16.45	50.79	74.00	-23.21	PK
H	10360	33.38	12.56	45.94	74.00	-28.06	PK
H	15540	34.38	16.45	50.83	74.00	-23.17	PK

802.11ac(HT20) 5220MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10440	34.63	12.64	47.27	74.00	-26.73	PK
V	15660	31.07	16.53	47.60	74.00	-26.40	PK
H	10440	32.88	12.64	45.52	74.00	-28.48	PK
H	15660	30.91	16.53	47.44	74.00	-26.56	PK

802.11ac(HT20) 5240MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10480	33.71	12.68	46.39	74.00	-27.61	PK
V	15720	32.24	16.54	48.78	74.00	-25.22	PK
H	10480	32.45	12.68	45.13	74.00	-28.87	PK
H	15720	34.49	16.54	51.03	74.00	-22.97	PK

802.11nHT40) 5190MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10380	32.90	12.58	45.48	74.00	-28.52	PK
V	15570	34.72	16.48	51.20	74.00	-22.80	PK
H	10380	35.19	12.58	47.77	74.00	-26.23	PK
H	15570	33.18	16.48	49.66	74.00	-24.34	PK

802.11n(HT40) 5230MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10460	34.15	12.66	46.81	74.00	-27.19	PK
V	15690	31.91	16.53	48.44	74.00	-25.56	PK
H	10460	34.10	12.66	46.76	74.00	-27.24	PK
H	15690	32.42	16.53	48.95	74.00	-25.05	PK

802.11ac(HT40) 5190MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10380	33.54	12.58	46.12	74.00	-27.88	PK
V	15570	34.29	16.48	50.77	74.00	-23.23	PK
H	10380	34.64	12.58	47.22	74.00	-26.78	PK
H	15570	32.57	16.48	49.05	74.00	-24.95	PK

802.11ac(HT40) 5230MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10460	34.57	12.66	47.23	74.00	-26.77	PK
V	15690	32.24	16.53	48.77	74.00	-25.23	PK
H	10460	33.96	12.66	46.62	74.00	-27.38	PK
H	15690	32.78	16.53	49.31	74.00	-24.69	PK

802.11ac(HT80) 5210MHz

Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	10420	32.93	12.62	45.55	74.00	-28.45	PK
V	15630	33.28	16.52	49.80	74.00	-24.20	PK
H	10420	33.02	12.62	45.64	74.00	-28.36	PK
H	15630	32.01	16.52	48.53	74.00	-25.47	PK

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

7.8 Frequency stability

Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	<p style="text-align: center;">Temperature Chamber</p> <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5190MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail						
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5190MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail						
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	
		Pass		Pass		Pass		Pass	

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5210MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail						
			Pass		Pass		Pass		Pass
			Pass		Pass		Pass		Pass
			Pass		Pass		Pass		Pass

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---