

FCC Radio Test Report

FCC ID: 2AX2URW350RGLL

Report No. : BTL-FCCP-3-2504T032
Equipment : 5G module
Model Name : RW350R-GL
Brand Name : Rolling Wireless
Applicant : Rolling Wireless S.a r.l.
Address : 8-10, rue Mathias Hardt 1717, Ville-Haute Luxembourg

Radio Function : WCDMA Band IV & LTE Band 4, 7, 12, 13, 17, 30, 38, 41, 42, 66, 71

FCC Rule Part(s) : FCC CFR Title 47, Part 27

Date of Receipt : 2025/4/8
Date of Test : 2025/4/28 ~ 2025/6/2
Issued Date : 2025/6/18

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Brett Shen
 Brett Shen, Engineer

Approved by : Jerry Chuang
 Jerry Chuang, Supervisor



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	REFERENCE TEST GUIDANCE	6
1.2	TEST FACILITY	6
1.3	MEASUREMENT UNCERTAINTY	6
1.4	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	13
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
2.4	SUPPORT UNITS	15
3	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER MEASUREMENT	16
3.1	LIMIT	16
3.2	TEST PROCEDURE	17
3.3	DEVIATION FROM TEST STANDARD	17
3.4	TEST SETUP	17
3.5	EUT OPERATING CONDITIONS	17
3.6	TEST RESULT	17
4	RADIATED SPURIOUS EMISSIONS MEASUREMENT	18
4.1	LIMIT	18
4.2	TEST PROCEDURE	18
4.3	DEVIATION FROM TEST STANDARD	18
4.4	TEST SETUP	19
4.5	EUT OPERATING CONDITIONS	19
4.6	TEST RESULT	19
5	LIST OF MEASURING EQUIPMENTS	20
6	EUT TEST PHOTO	21
7	EUT PHOTOS	21
APPENDIX A	EFFECTIVE RADIATED POWER & EQUIVALENT ISOTROPIC RADIATED POWER	22
APPENDIX B	RADIATED SPURIOUS EMISSIONS	42

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2504T032	R00	Original Report.	2025/6/18	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
2.1046 27.50(a)(3) 27.50(b)(10) 27.50(c)(10) 27.50(d)(4) 27.50(h)(2) 27.50(k)(3) 27.53(j)(3)	Effective Radiated Power & Equivalent Isotropic Radiated Power	APPENDIX A	Pass	-----
2.1053 27.53(a)(4) 27.53(c) 27.53(f) 27.53(g) 27.53(h) 27.53(m) 27.53(n)(2) 27.53(l)(2)	Radiated Spurious Emissions	APPENDIX B	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCC ID: 2AX2URW350RGLL) to be incorporated to the host device (Model number: TP00167A), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 REFERENCE TEST GUIDANCE

ANSI C63.26-2015
ANSI/TIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.2 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☒ SR10 ☐ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.4 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
Effective Radiated Power & Equivalent Isotropic Radiated Power	23 °C, 58 %	AC 120V	Easton Tsai
Radiated Spurious Emissions	Refer to data	AC 120V	Mark Wang

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	5G module			
Model Name	RW350R-GL			
Brand Name	Rolling Wireless			
Model Difference	N/A			
Power Source	Supplied from host system.			
Power Rating	3.3 Vdc			
Host device information				
Equipment	Notebook Computer			
Model Name	TP00167A			
Brand Name	Lenovo			
Model Difference	N/A			
Power Source	DC voltage supplied from External Power Supply. (Lenovo / ADL180YGSLC3A, ADL180YGSAC3A, ADL180YGSHC3A)			
Power Rating	Model: ADL180YGSLC3A Input: 100-240V~ 3.0A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W			
	Model: ADL180YGSAC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W			
	Model: ADL180YGSHC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 5.0VDC 3.0A 15.0W / 9.0VDC 3.0A 27.0W / 15.0VDC 3.0A 45.0W / 20.0VDC 5.0A 100.0W / 28.0VDC 5.0A 140.0W			
WIFI+BT Module	Intel® BE200NGW / BE200NGW			
WWAN Module	Rolling Wireless / RW350R-GL			
NFC Module	FOXCONN / T77H747			
Operation Frequency	Band	UL Frequency (MHz)		DL Frequency (MHz)
	WCDMA IV	1710 ~ 1755		2110 ~ 2155
	LTE 4	1710 ~ 1755		2110 ~ 2155
	LTE 7	2500 ~ 2570		2620 ~ 2690
	LTE 12	699 ~ 716		729 ~ 746
	LTE 13	777 ~ 787		746 ~ 756
	LTE 17	704 ~ 716		734 ~ 746
	LTE 30	2305 ~ 2315		2350 ~ 2360
	LTE 38	2570 ~ 2620		-
	LTE 41	2496 ~ 2690		-
	LTE 42	3450 ~ 3550		3450 ~ 3550
	LTE 66	1710 ~ 1780		2110 ~ 2200
	LTE 71	663 ~ 698		617 ~ 652
Maximum EIRP	Band	BW (MHz)	Mode	Power (W)
	WCDMA IV	-	-	0.395
	LTE 66/4	1.4	QPSK	0.312
			16QAM	0.197
		3	QPSK	0.315
			16QAM	0.199
		5	QPSK	0.320
			16QAM	0.202

Maximum EIRP	LTE 66/4	10	QPSK	0.325
			16QAM	0.204
		15	QPSK	0.331
			16QAM	0.205
		20	QPSK	0.337
			16QAM	0.210
			64QAM	0.171
			256QAM	0.133
	LTE 7	5	QPSK	0.319
			16QAM	0.208
		10	QPSK	0.325
			16QAM	0.209
		15	QPSK	0.331
			16QAM	0.211
		20	QPSK	0.335
			16QAM	0.215
			64QAM	0.174
			256QAM	0.138
	LTE 30	5	QPSK	0.236
			16QAM	0.153
		10	QPSK	0.237
			16QAM	0.154
			64QAM	0.121
			256QAM	0.077
	LTE 38	5	QPSK	0.288
			16QAM	0.183
		10	QPSK	0.289
			16QAM	0.184
		15	QPSK	0.293
			16QAM	0.187
		20	QPSK	0.297
			16QAM	0.188
			64QAM	0.153
			256QAM	0.122
	LTE 41	5	QPSK	0.335
			16QAM	0.211
		10	QPSK	0.339
			16QAM	0.213
		15	QPSK	0.341
			16QAM	0.216
		20	QPSK	0.342
			16QAM	0.220
			64QAM	0.177
			256QAM	0.139
	LTE 42	5	QPSK	0.118
			16QAM	0.077
		10	QPSK	0.119
			16QAM	0.077
		15	QPSK	0.120
			16QAM	0.078
		20	QPSK	0.124
			16QAM	0.080
			64QAM	0.064
			256QAM	0.050

Maximum ERP	LTE 12	1.4	QPSK	0.146
			16QAM	0.094
		3	QPSK	0.147
			16QAM	0.095
		5	QPSK	0.149
			16QAM	0.096
		10	QPSK	0.150
			16QAM	0.097
			64QAM	0.076
			256QAM	0.060
	LTE 13	5	QPSK	0.194
			16QAM	0.125
		10	QPSK	0.195
			16QAM	0.126
			64QAM	0.101
			256QAM	0.081
	LTE 17	5	QPSK	0.149
			16QAM	0.095
		10	QPSK	0.150
			16QAM	0.096
			64QAM	0.076
			256QAM	0.061
	LTE 71	5	QPSK	0.105
			16QAM	0.065
		10	QPSK	0.105
			16QAM	0.067
		15	QPSK	0.107
			16QAM	0.067
		20	QPSK	0.108
			16QAM	0.070
			64QAM	0.055
			256QAM	0.044
Maximum EIRP	LTE CA_7C	15+10	QPSK	0.230
			16QAM	0.215
		10+20	QPSK	0.209
			16QAM	0.202
		20+10	QPSK	0.246
			16QAM	0.195
		15+15	QPSK	0.233
			16QAM	0.213
		15+20	QPSK	0.240
			16QAM	0.207
		20+15	QPSK	0.216
			16QAM	0.186
		20+20	QPSK	0.240
			16QAM	0.206
			64QAM	0.126
			256QAM	0.083
	LTE CA_38C	15+15	QPSK	0.264
			16QAM	0.217
		20+20	QPSK	0.280
			16QAM	0.225
			64QAM	0.139
			256QAM	0.084

Maximum EIRP	LTE CA_41C	5+20	QPSK	0.333
			16QAM	0.244
		20+5	QPSK	0.279
			16QAM	0.244
		10+15	QPSK	0.286
			16QAM	0.258
		15+10	QPSK	0.304
			16QAM	0.253
		10+20	QPSK	0.314
			16QAM	0.262
		20+10	QPSK	0.298
			16QAM	0.254
		15+15	QPSK	0.327
			16QAM	0.243
		15+20	QPSK	0.333
			16QAM	0.244
		20+15	QPSK	0.299
			16QAM	0.255
	LTE CA_42C	20+20	QPSK	0.326
			16QAM	0.259
			64QAM	0.163
			256QAM	0.092
		5+20	QPSK	0.112
			16QAM	0.100
		20+5	QPSK	0.109
			16QAM	0.104
		10+20	QPSK	0.150
			16QAM	0.097
		20+10	QPSK	0.112
			16QAM	0.107
		15+20	QPSK	0.116
			16QAM	0.105
		20+15	QPSK	0.150
			16QAM	0.150
		20+20	QPSK	0.120
			16QAM	0.107
			64QAM	0.065
			256QAM	0.040
	LTE CA_66B	5+5	QPSK	0.226
			16QAM	0.200
		5+10	QPSK	0.211
			16QAM	0.214
		10+5	QPSK	0.210
			16QAM	0.211
		5+15	QPSK	0.232
			16QAM	0.208
		15+5	QPSK	0.200
			16QAM	0.192
		10+10	QPSK	0.217
			16QAM	0.210
			64QAM	0.128
			256QAM	0.083

Maximum EIRP	LTE CA_66C	10+15	QPSK	0.220
			16QAM	0.198
		15+10	QPSK	0.222
			16QAM	0.199
		10+20	QPSK	0.222
			16QAM	0.199
		20+10	QPSK	0.223
			16QAM	0.198
		15+15	QPSK	0.219
			16QAM	0.196
		15+20	QPSK	0.222
			16QAM	0.199
		20+15	QPSK	0.220
			16QAM	0.198
		20+5	QPSK	0.223
			16QAM	0.199
		5+20	QPSK	0.219
			16QAM	0.200
		20+20	QPSK	0.238
			16QAM	0.209
			64QAM	0.128
			256QAM	0.082
Test Model		RW350R-GL		
Sample Status		Engineering Sample		
EUT Modification(s)		N/A		

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	Speedwire	DC330027Q10	PIFA	I-PEX	1.79	WCDMA Band IV
						LTE Band 4
					1.47	LTE Band 7
					0.52	LTE Band 12
					1.77	LTE Band 13
					0.52	LTE Band 17
					0.22	LTE Band 30
					0.06	LTE Band 38
					1.54	LTE Band 41
					0.13	LTE Band 42
					1.79	LTE Band 66
					-0.99	LTE Band 71
Aux	Speedwire	DC330027Q10	PIFA	I-PEX	-	RX only
MIMO1	Speedwire	DC330027Q10	PIFA	I-PEX	-	RX only
MIMO2	Speedwire	DC330027Q10	PIFA	I-PEX	0.90	WCDMA Band IV
						LTE Band 4
					0.96	LTE Band 7
					0.98	LTE Band 30
					0.96	LTE Band 38
					0.96	LTE Band 41
					-1.17	LTE Band 42
					0.88	LTE Band 66

- (3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Band	Test Mode	Note
Effective Radiated Power & Equivalent Isotropic Radiated Power	WCDMA Band IV	Refer to APPENDIX A	-
	LTE Band 4		
	LTE Band 7		
	LTE Band 12		
	LTE Band 13		
	LTE Band 17		
	LTE Band 30		
	LTE Band 38		
	LTE Band 41		
	LTE Band 42		
	LTE Band 66		
	LTE Band 71		
	LTE Band CA_7C		
	LTE Band CA_38C		
	LTE Band CA_41C		
	LTE Band CA_42C		
	LTE Band CA_66B		
	LTE Band CA_66C		
Radiated Spurious Emissions (Below 1G)	WCDMA Band IV	Refer to APPENDIX B	-
	LTE Band 4		
	LTE Band 7		
	LTE Band 12		
	LTE Band 13		
	LTE Band 17		
	LTE Band 30		
	LTE Band 38		
	LTE Band 41		
	LTE Band 42		
	LTE Band 66		
	LTE Band 71		
	LTE Band CA_4A-5A		
	LTE Band CA_4A-12A		
	LTE Band CA_4A-13A		
	LTE Band CA_7C		
	LTE Band CA_12A-30A		
	LTE Band CA_12A-66A		
	LTE Band CA_13A-48A		
	LTE Band CA_13A-66A		
	LTE Band CA_41A-42A		
	LTE Band CA_41C		
	LTE Band CA_66B		
	LTE Band CA_66C		


Radiated Spurious Emissions (Above 1G)	WCDMA Band IV	Refer to APPENDIX B	-
	LTE Band 4		
	LTE Band 7		
	LTE Band 12		
	LTE Band 13		
	LTE Band 17		
	LTE Band 30		
	LTE Band 38		
	LTE Band 41		
	LTE Band 42		
	LTE Band 66		
	LTE Band 71		
	LTE Band CA_7C		
	LTE Band CA_4A-5A		
	LTE Band CA_4A-12A		
	LTE Band CA_4A-13A		
	LTE Band CA_12A-30A		
	LTE Band CA_12A-66A		
	LTE Band CA_13A-48A		
	LTE Band CA_13A-66A		
	LTE Band CA_41A-42A		
	LTE Band CA_41C		
	LTE Band CA_66B		
	LTE Band CA_66C		
Radiated Spurious Emissions (Above 18G)	LTE Band 7	Refer to APPENDIX B	-
	LTE Band 30		
	LTE Band 38		
	LTE Band 41		
	LTE Band 42		
	LTE Band CA_12A-30A		
	LTE Band CA_13A-48A		
	LTE Band CA_41A-42A		
	LTE Band CA_41C		

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (2) For Radiated Spurious Emissions both QPSK, 16QAM, 64QAM and 256QAM are evaluated, but only the worst case (QPSK) is recorded.
- (3) LTE Band 66 (1710 ~ 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 ~ 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

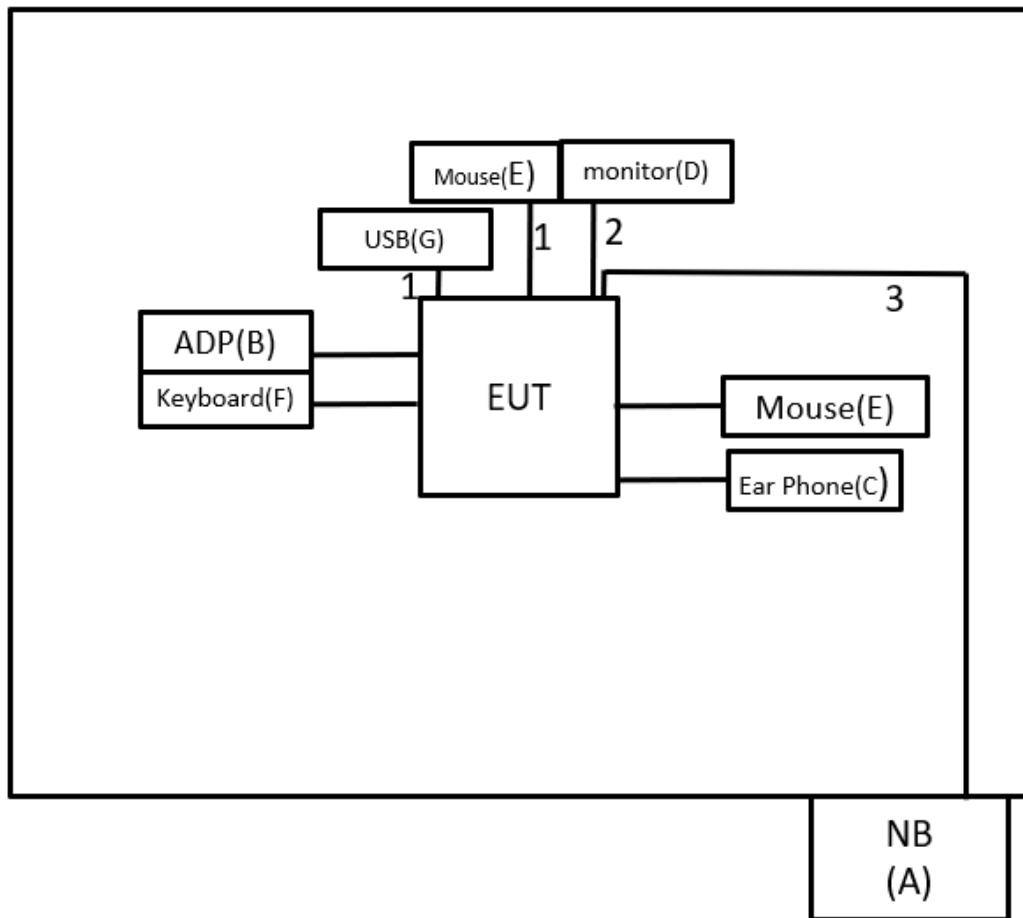

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	HP	TPN-I119	N/A	Furnished by test lab.
B	ADP	Lenovo	ADL180YGSHC 3A	N/A	Supplied by test requester.
C	Ear Phone	HTC	S260	N/A	Furnished by test lab.
D	27" 4K Monitor	DELL	P2415Q	N/A	Furnished by test lab.
E	Mouse	Lenovo	SM-8823	N/A	Furnished by test lab.
F	Keyboard	Bloody	KB-8	N/A	Furnished by test lab.
G	USB	ADATA	UV150	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.1m	USB-C to USB 3.0 CABLE	Furnished by test lab.
2	N/A	N/A	1.8m	HDMI	Furnished by test lab.
3	N/A	N/A	10m	RJ45 Cable	Furnished by test lab.

3 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER MEASUREMENT

3.1 LIMIT

WCDMA IV, LTE Band 4 and 66:

27.50(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

LTE Band 7, 38 and 41:

27.50(h)(2) BRS and EBS: Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

LTE Band 12, 17 and 71:

27.50(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

LTE Band 13:

27.50(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

LTE Band 30:

27.50(a)(3) Mobile and portable stations. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.

LTE Band 42:

27.50(k)(3) Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

3.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}.$
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

Conducted Measurement:



3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBm)		Correct Factor (dB/m)		Measurement Value (dBm)
-50.43	+	-2.11	=	-52.54

Measurement Value (dBm)		Limit Value (dBm)		Margin Level (dB)
-52.54	-	-13	=	-39.54

4.2 TEST PROCEDURE



The testing follows FCC KDB 971168 v03r01 Section 6.2.

- In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- EIRP = Output power level of S.G - TX cable loss + Antenna gain of substitution horn.
- ERP power can be calculated form EIRP power by subtracting the gain of dipole,
ERP power = EIRP power - 2.15 dBi.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz / 3 MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

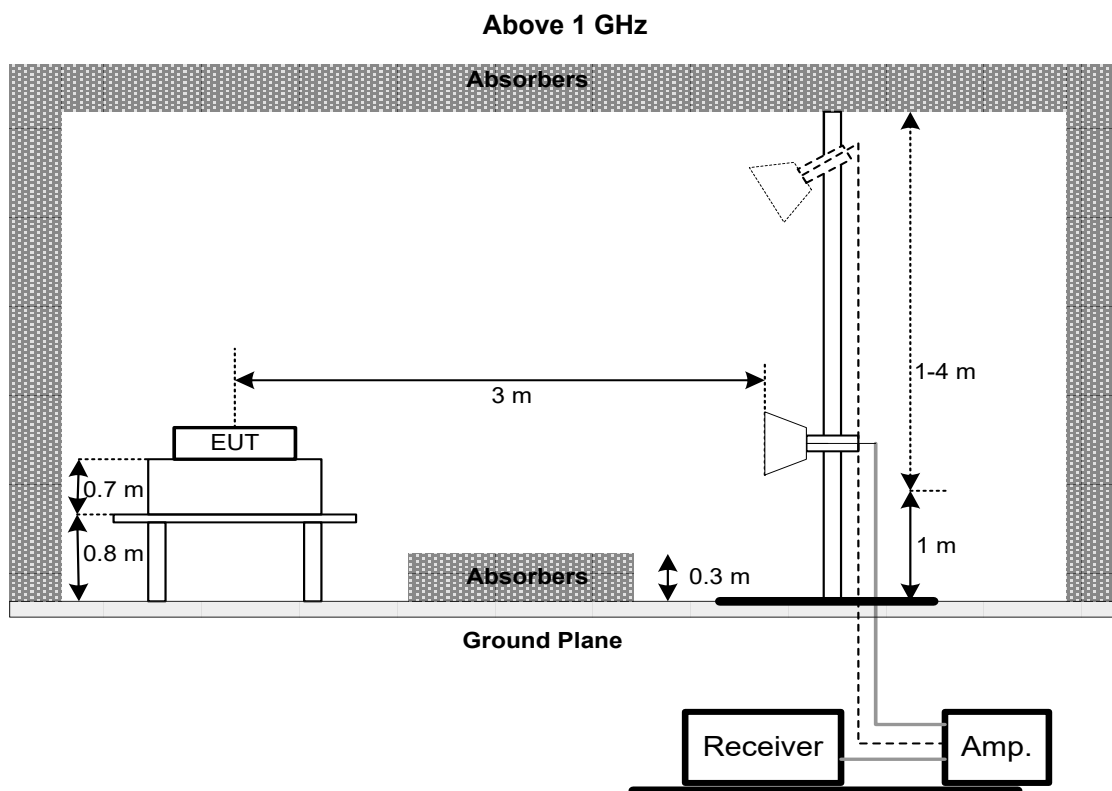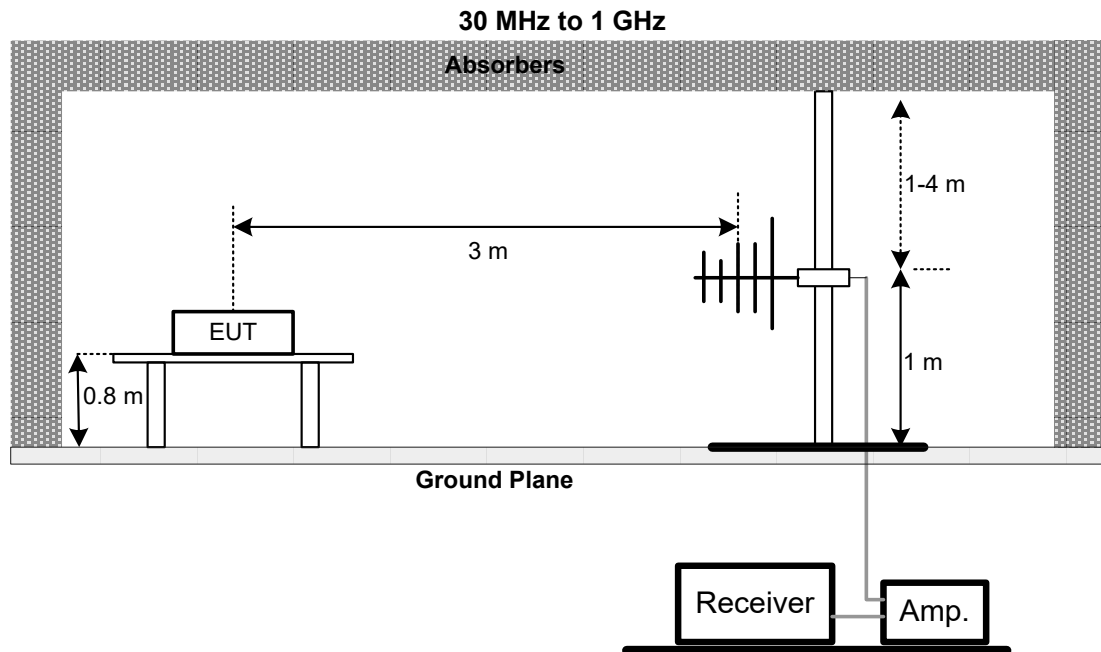

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B

5 LIST OF MEASURING EQUIPMENTS

Effective Isotropic Radiated Power and Effective Radiated Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2024/7/7	2025/7/6
2	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18
3	Radio Communication Analyzer	ANRITSU	MT8000A	6262036844	2024/11/20	2025/11/19

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2024/9/5	2025/9/4
2	Preamplifier	EMCI	EMC118A45SE	980819	2025/3/5	2026/3/4
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2024/9/4	2025/9/3
4	Preamplifier	EMCI	EMC001340	980579	2024/9/4	2025/9/3
5	Test Cable	EMCI	EMC104-SM-1000	180809	2025/3/5	2026/3/4
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2025/3/5	2026/3/4
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2025/2/19	2026/2/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2024/9/9	2025/9/8
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
					2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2024/5/17	2025/5/16
					2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2024/6/14	2025/6/13
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2024/6/14	2025/6/13
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2025/3/12	2026/3/11
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
16	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A
17	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2504T032-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2504T032-1 (APPENDIX-EUT PHOTOS).

APPENDIX A EFFECTIVE RADIATED POWER & EQUIVALENT ISOTROPIC RADIATED POWER

WCDMA Band IV Power:

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
WCDMA Band IV	Rel 99	1312/1537	1712.4	24.06	25.85	0.385
		1412/1637	1732.4	24.18	25.97	0.395
		1513/1738	1752.6	24.13	25.92	0.391

Band	Sub-test	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
HSDPA IV	1	1312/1537	1712.4	23.10	24.89	0.308
		1412/1637	1732.4	23.18	24.97	0.314
		1513/1738	1752.6	23.25	25.04	0.319
	2	1312/1537	1712.4	22.88	24.67	0.293
		1412/1637	1732.4	22.76	24.55	0.285
		1513/1738	1752.6	22.89	24.68	0.294
	3	1312/1537	1712.4	22.22	24.01	0.252
		1412/1637	1732.4	22.37	24.16	0.261
		1513/1738	1752.6	22.35	24.14	0.259
	4	1312/1537	1712.4	22.29	24.08	0.256
		1412/1637	1732.4	22.36	24.15	0.260
		1513/1738	1752.6	22.40	24.19	0.262

Band	Sub-test	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
HSUPA IV	1	1312/1537	1712.4	21.03	22.82	0.191
		1412/1637	1732.4	21.25	23.04	0.201
		1513/1738	1752.6	21.24	23.03	0.201
	2	1312/1537	1712.4	19.45	21.24	0.133
		1412/1637	1732.4	19.39	21.18	0.131
		1513/1738	1752.6	19.40	21.19	0.132
	3	1312/1537	1712.4	20.37	22.16	0.164
		1412/1637	1732.4	20.33	22.12	0.163
		1513/1738	1752.6	20.41	22.2	0.166
	4	1312/1537	1712.4	19.35	21.14	0.130
		1412/1637	1732.4	19.30	21.09	0.129
		1513/1738	1752.6	19.44	21.23	0.133
	5	1312/1537	1712.4	21.43	23.22	0.210
		1412/1637	1732.4	21.44	23.23	0.210
		1513/1738	1752.6	21.35	23.14	0.206

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

LTE Band 66/4 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	1.4	131979	1710.7	QPSK	1	0	0	22.92	24.71	0.296
				16QAM	1	0	2	21.01	22.80	0.191
		132322	1745	QPSK	1	0	0	23.15	24.94	0.312
				16QAM	1	0	2	21.16	22.95	0.197
		132665	1779.3	QPSK	1	0	0	23.06	24.85	0.306
				16QAM	1	0	2	21.07	22.86	0.193
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	3	131987	1711.5	QPSK	1	0	0	22.95	24.74	0.298
				16QAM	1	0	2	21.02	22.81	0.191
		132322	1745	QPSK	1	0	0	23.20	24.99	0.315
				16QAM	1	0	2	21.20	22.99	0.199
		132657	1778.5	QPSK	1	0	0	23.12	24.91	0.310
				16QAM	1	0	2	21.09	22.88	0.194
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	5	131997	1712.5	QPSK	1	0	0	23.01	24.80	0.302
				16QAM	1	0	2	21.06	22.85	0.193
		132322	1745	QPSK	1	0	0	23.27	25.06	0.320
				16QAM	1	0	2	21.26	23.05	0.202
		132647	1777.5	QPSK	1	0	0	23.16	24.95	0.313
				16QAM	1	0	2	21.11	22.90	0.195
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	10	132022	1715	QPSK	1	0	0	23.04	24.83	0.304
				16QAM	1	0	2	21.14	22.93	0.196
		132322	1745	QPSK	1	0	0	23.32	25.11	0.325
				16QAM	1	0	2	21.30	23.09	0.204
		132622	1775	QPSK	1	0	0	23.18	24.97	0.314
				16QAM	1	0	2	21.20	22.99	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	15	132047	1717.5	QPSK	1	0	0	23.11	24.90	0.309
				16QAM	1	0	2	21.18	22.97	0.198
		132322	1745	QPSK	1	0	0	23.41	25.20	0.331
				16QAM	1	0	2	21.34	23.13	0.205
		132597	1772.5	QPSK	1	0	0	23.21	25.00	0.316
				16QAM	1	0	2	21.25	23.04	0.201

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66 / 4	20	132072	1720	QPSK	1	0	0	23.36	25.15	0.327
					1	49	0	23.17	24.96	0.313
					1	99	0	23.20	24.99	0.316
					50	0	1	22.48	24.27	0.267
					50	24	1	22.20	23.99	0.251
					50	50	1	22.28	24.07	0.255
					100	0	1	22.46	24.25	0.266
				16QAM	1	0	2	21.40	23.19	0.209
				64QAM	1	0	3	20.42	22.21	0.166
				256QAM	1	0	4	19.42	21.21	0.132
		132322	1745	QPSK	1	0	0	23.48	25.27	0.337
					1	49	0	23.41	25.20	0.331
					1	99	0	23.23	25.02	0.318
					50	0	1	22.49	24.28	0.268
					50	24	1	22.45	24.24	0.266
					50	50	1	22.37	24.16	0.261
					100	0	1	22.42	24.21	0.264
				16QAM	1	0	2	21.42	23.21	0.209
				64QAM	1	0	3	20.41	22.20	0.166
				256QAM	1	0	4	19.43	21.22	0.132
		132572	1770	QPSK	1	0	0	23.41	25.20	0.331
					1	49	0	23.25	25.04	0.319
					1	99	0	23.23	25.02	0.318
					50	0	1	22.46	24.25	0.266
					50	24	1	22.26	24.05	0.254
					50	50	1	22.30	24.09	0.257
					100	0	1	22.51	24.30	0.269
				16QAM	1	0	2	21.43	23.22	0.210
				64QAM	1	0	3	20.53	22.32	0.171
				256QAM	1	0	4	19.46	21.25	0.133

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

LTE Band 7 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7	5	20775	2502.5	QPSK	1	0	0	23.53	25.00	0.316
				16QAM	1	0	2	21.68	23.15	0.207
		21100	2535	QPSK	1	0	0	23.57	25.04	0.319
				16QAM	1	0	2	21.70	23.17	0.208
		21425	2567.5	QPSK	1	0	0	23.39	24.86	0.306
				16QAM	1	0	2	21.52	22.99	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7	10	20800	2505	QPSK	1	0	0	23.56	25.03	0.318
				16QAM	1	0	2	21.73	23.20	0.209
		21100	2535	QPSK	1	0	0	23.65	25.12	0.325
				16QAM	1	0	2	21.73	23.20	0.209
		21400	2565	QPSK	1	0	0	23.46	24.93	0.311
				16QAM	1	0	2	21.59	23.06	0.202
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7	15	20825	2507.5	QPSK	1	0	0	23.61	25.08	0.322
				16QAM	1	0	2	21.76	23.23	0.210
		21100	2535	QPSK	1	0	0	23.72	25.19	0.331
				16QAM	1	0	2	21.77	23.24	0.211
		21375	2562.5	QPSK	1	0	0	23.50	24.97	0.314
				16QAM	1	0	2	21.66	23.13	0.206
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7	20	20850	2510	QPSK	1	0	0	23.71	25.18	0.330
					1	49	0	23.65	25.12	0.325
					1	99	0	23.63	25.10	0.324
					50	0	1	22.74	24.21	0.263
					50	24	1	22.45	23.92	0.247
					50	50	1	22.49	23.96	0.249
					100	0	1	22.84	24.31	0.270
				16QAM	1	0	2	21.84	23.31	0.214
				64QAM	1	0	3	20.79	22.26	0.168
				256QAM	1	0	4	19.78	21.25	0.133
		21100	2535	QPSK	1	0	0	23.78	25.25	0.335
					1	49	0	23.67	25.14	0.327
					1	99	0	23.69	25.16	0.328
					50	0	1	22.79	24.26	0.267
					50	24	1	22.73	24.20	0.263
					50	50	1	22.76	24.23	0.265
					100	0	1	22.77	24.24	0.265
				16QAM	1	0	2	21.79	23.26	0.212
				64QAM	1	0	3	20.76	22.23	0.167
				256QAM	1	0	4	19.69	21.16	0.131
		21350	2560	QPSK	1	0	0	23.75	25.22	0.333
					1	49	0	23.69	25.16	0.328
					1	99	0	23.70	25.17	0.329
					50	0	1	22.77	24.24	0.265
					50	24	1	22.61	24.08	0.256
					50	50	1	22.65	24.12	0.258
					100	0	1	22.86	24.33	0.271
				16QAM	1	0	2	21.85	23.32	0.215
				64QAM	1	0	3	20.94	22.41	0.174
				256QAM	1	0	4	19.93	21.40	0.138

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band 12 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
12	1.4	23017	699.7	QPSK	1	0	0	23.19	21.56	0.143
				16QAM	1	0	2	21.36	19.73	0.094
		23095	707.5	QPSK	1	0	0	23.26	21.63	0.146
				16QAM	1	0	2	21.34	19.71	0.094
		23173	715.3	QPSK	1	0	0	23.11	21.48	0.141
				16QAM	1	0	2	21.38	19.75	0.094
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
12	3	23025	700.5	QPSK	1	0	0	23.21	21.58	0.144
				16QAM	1	0	2	21.38	19.75	0.094
		23095	707.5	QPSK	1	0	0	23.30	21.67	0.147
				16QAM	1	0	2	21.42	19.79	0.095
		23165	714.5	QPSK	1	0	0	23.14	21.51	0.142
				16QAM	1	0	2	21.42	19.79	0.095
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
12	5	23035	701.5	QPSK	1	0	0	23.26	21.63	0.145
				16QAM	1	0	2	21.44	19.81	0.096
		23095	707.5	QPSK	1	0	0	23.37	21.74	0.149
				16QAM	1	0	2	21.44	19.81	0.096
		23155	713.5	QPSK	1	0	0	23.20	21.57	0.143
				16QAM	1	0	2	21.44	19.81	0.096
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
12	10	23060	704	QPSK	1	0	0	23.32	21.69	0.148
					1	25	0	23.29	21.66	0.147
					1	49	0	23.15	21.52	0.142
					25	0	1	22.39	20.76	0.119
					25	12	1	22.15	20.52	0.113
					25	25	1	22.23	20.60	0.115
					50	0	1	22.47	20.84	0.121
				16QAM	1	0	2	21.45	19.82	0.096
				64QAM	1	0	3	20.39	18.76	0.075
				256QAM	1	0	4	19.37	17.74	0.059
		23095	707.5	QPSK	1	0	0	23.40	21.77	0.150
					1	25	0	23.37	21.74	0.149
					1	49	0	23.35	21.72	0.149
					25	0	1	22.48	20.85	0.122
					25	12	1	22.30	20.67	0.117
					25	25	1	22.31	20.68	0.117
					50	0	1	22.41	20.78	0.120
				16QAM	1	0	2	21.49	19.86	0.097
				64QAM	1	0	3	20.46	18.83	0.076
				256QAM	1	0	4	19.38	17.75	0.060
		23130	711	QPSK	1	0	0	23.24	21.61	0.145
					1	25	0	23.19	21.56	0.143
					1	49	0	23.22	21.59	0.144
					25	0	1	22.43	20.80	0.120
					25	12	1	22.33	20.70	0.118
					25	25	1	22.32	20.69	0.117
					50	0	1	22.44	20.81	0.120
				16QAM	1	0	2	21.48	19.85	0.097
				64QAM	1	0	3	20.31	18.68	0.074
				256QAM	1	0	4	19.38	17.75	0.060

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

LTE Band 13 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
13	5	23205	779.5	QPSK	1	0	0	23.26	22.88	0.194
				16QAM	1	0	2	21.34	20.96	0.125
		23230	782	QPSK	1	0	0	23.18	22.80	0.191
				16QAM	1	0	2	21.32	20.94	0.124
		23255	784.5	QPSK	1	0	0	23.21	22.83	0.192
				16QAM	1	0	2	21.31	20.93	0.124
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
13	10	23230	782	QPSK	1	0	0	23.27	22.89	0.195
					1	25	0	23.25	22.87	0.194
					1	49	0	23.20	22.82	0.191
					25	0	1	22.41	22.03	0.160
					25	12	1	22.30	21.92	0.156
					25	25	1	22.31	21.93	0.156
					50	0	1	22.33	21.95	0.157
				16QAM	1	0	2	21.39	21.01	0.126
				64QAM	1	0	3	20.43	20.05	0.101
				256QAM	1	0	4	19.47	19.09	0.081

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

LTE Band 17 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
17	5	23755	706.5	QPSK	1	0	0	23.28	21.65	0.146
				16QAM	1	0	2	21.39	19.76	0.095
		23790	710	QPSK	1	0	0	23.36	21.73	0.149
				16QAM	1	0	2	21.35	19.72	0.094
		23825	713.5	QPSK	1	0	0	23.07	21.44	0.139
				16QAM	1	0	2	21.21	19.58	0.091
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
17	10	23780	709	QPSK	1	0	0	23.34	21.71	0.148
					1	25	0	23.30	21.67	0.147
					1	49	0	23.31	21.68	0.147
					25	0	1	22.41	20.78	0.120
					25	12	1	22.38	20.75	0.119
					25	25	1	22.35	20.72	0.118
					50	0	1	22.39	20.76	0.119
				16QAM	1	0	2	21.45	19.82	0.096
				64QAM	1	0	3	20.46	18.83	0.076
				256QAM	1	0	4	19.45	17.82	0.061
		23790	710	QPSK	1	0	0	23.40	21.77	0.150
					1	25	0	23.28	21.65	0.146
					1	49	0	23.36	21.73	0.149
					25	0	1	22.43	20.80	0.120
					25	12	1	22.34	20.71	0.118
					25	25	1	22.40	20.77	0.119
					50	0	1	22.44	20.81	0.120
				16QAM	1	0	2	21.43	19.80	0.095
				64QAM	1	0	3	20.33	18.70	0.074
				256QAM	1	0	4	19.37	17.74	0.059
		23800	711	QPSK	1	0	0	23.18	21.55	0.143
					1	25	0	23.15	21.52	0.142
					1	49	0	23.10	21.47	0.140
					25	0	1	22.22	20.59	0.115
					25	12	1	22.17	20.54	0.113
					25	25	1	22.19	20.56	0.114
					50	0	1	22.29	20.66	0.116
				16QAM	1	0	2	21.32	19.69	0.093
				64QAM	1	0	3	20.31	18.68	0.074
				256QAM	1	0	4	19.24	17.61	0.058

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

LTE Band 30 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
30	5	27685	2307.5	QPSK	1	0	0	22.75	23.73	0.236
				16QAM	1	0	2	20.86	21.84	0.153
		27710	2310	QPSK	1	0	0	22.68	23.66	0.232
				16QAM	1	0	2	20.87	21.85	0.153
		27735	2312.5	QPSK	1	0	0	22.71	23.69	0.234
				16QAM	1	0	2	20.85	21.83	0.152
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
30	10	27710	2310	QPSK	1	0	0	22.76	23.74	0.237
					1	25	0	22.68	23.66	0.232
					1	49	0	22.52	23.50	0.224
					25	0	1	21.79	22.77	0.189
					25	12	1	21.78	22.76	0.189
					25	25	1	21.62	22.60	0.182
					50	0	1	21.80	22.78	0.189
				16QAM	1	0	2	20.91	21.89	0.154
				64QAM	1	0	3	19.86	20.84	0.121
				256QAM	1	0	4	17.87	18.85	0.077

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band 38 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38	5	37775	2572.5	QPSK	1	0	0	23.49	24.45	0.279
				16QAM	1	0	2	21.51	22.47	0.177
		38000	2595	QPSK	1	0	0	23.63	24.59	0.288
				16QAM	1	0	2	21.67	22.63	0.183
		38225	2617.5	QPSK	1	0	0	23.31	24.27	0.267
				16QAM	1	0	2	21.25	22.21	0.166
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38	10	37800	2575	QPSK	1	0	0	23.54	24.50	0.282
				16QAM	1	0	2	21.56	22.52	0.179
		38000	2595	QPSK	1	0	0	23.65	24.61	0.289
				16QAM	1	0	2	21.69	22.65	0.184
		38200	2615	QPSK	1	0	0	23.40	24.36	0.273
				16QAM	1	0	2	21.31	22.27	0.169
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38	15	37825	2577.5	QPSK	1	0	0	23.58	24.54	0.285
				16QAM	1	0	2	21.62	22.58	0.181
		38000	2595	QPSK	1	0	0	23.72	24.68	0.293
				16QAM	1	0	2	21.76	22.72	0.187
		38175	2612.5	QPSK	1	0	0	23.44	24.40	0.276
				16QAM	1	0	2	21.34	22.30	0.170
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38	20	37850	2580	QPSK	1	0	0	23.67	24.63	0.290
					1	49	0	23.64	24.60	0.288
					1	99	0	23.54	24.50	0.282
					50	0	1	22.73	23.69	0.234
					50	24	1	22.68	23.64	0.231
					50	50	1	22.63	23.59	0.228
					100	0	1	22.74	23.70	0.234
				16QAM	1	0	2	21.70	22.66	0.184
				64QAM	1	0	3	20.74	21.70	0.148
				256QAM	1	0	4	19.78	20.74	0.119
		38000	2595	QPSK	1	0	0	23.77	24.73	0.297
					1	49	0	23.67	24.63	0.290
					1	99	0	23.52	24.48	0.281
					50	0	1	22.92	23.88	0.244
					50	24	1	22.79	23.75	0.237
					50	50	1	22.59	23.55	0.226
					100	0	1	22.90	23.86	0.243
				16QAM	1	0	2	21.79	22.75	0.188
				64QAM	1	0	3	20.88	21.84	0.153
				256QAM	1	0	4	19.91	20.87	0.122
		38150	2610	QPSK	1	0	0	23.48	24.44	0.278
					1	49	0	23.46	24.42	0.277
					1	99	0	23.39	24.35	0.272
					50	0	1	22.50	23.46	0.222
					50	24	1	22.41	23.37	0.217
					50	50	1	22.49	23.45	0.221
					100	0	1	22.40	23.36	0.217
				16QAM	1	0	2	21.45	22.41	0.174
				64QAM	1	0	3	20.50	21.46	0.140
				256QAM	1	0	4	19.42	20.38	0.109

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

LTE Band 41 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41	5	39675	2498.5	QPSK	1	0	0	23.35	24.89	0.308
				16QAM	1	0	2	21.51	23.05	0.202
		40620	2593	QPSK	1	0	0	23.71	25.25	0.335
				16QAM	1	0	2	21.70	23.24	0.211
		41565	2687.5	QPSK	1	0	0	23.36	24.90	0.309
				16QAM	1	0	2	21.52	23.06	0.202
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41	10	39700	2501	QPSK	1	0	0	23.43	24.97	0.314
				16QAM	1	0	2	21.57	23.11	0.205
		20620	2593	QPSK	1	0	0	23.76	25.30	0.339
				16QAM	1	0	2	21.74	23.28	0.213
		41540	2685	QPSK	1	0	0	23.43	24.97	0.314
				16QAM	1	0	2	21.56	23.10	0.204
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41	15	39725	2503.5	QPSK	1	0	0	23.50	25.04	0.319
				16QAM	1	0	2	21.62	23.16	0.207
		40620	2593	QPSK	1	0	0	23.79	25.33	0.341
				16QAM	1	0	2	21.80	23.34	0.216
		41515	2682.5	QPSK	1	0	0	23.49	25.03	0.319
				16QAM	1	0	2	21.61	23.15	0.206
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41	20	39750	2506	QPSK	1	0	0	23.75	25.29	0.338
					1	49	0	23.52	25.06	0.321
					1	99	0	23.64	25.18	0.330
					50	0	1	22.80	24.34	0.271
					50	24	1	22.57	24.11	0.258
					50	50	1	22.65	24.19	0.263
					100	0	1	22.87	24.41	0.276
				16QAM	1	0	2	21.88	23.42	0.220
				64QAM	1	0	3	20.85	22.39	0.173
				256QAM	1	0	4	19.88	21.42	0.139
		40620	2593	QPSK	1	0	0	23.80	25.34	0.342
					1	49	0	23.63	25.17	0.329
					1	99	0	23.74	25.28	0.337
					50	0	1	22.90	24.44	0.278
					50	24	1	22.72	24.26	0.267
					50	50	1	22.75	24.29	0.269
					100	0	1	22.92	24.46	0.279
				16QAM	1	0	2	21.83	23.37	0.217
				64QAM	1	0	3	20.94	22.48	0.177
				256QAM	1	0	4	19.88	21.42	0.139
		41490	2680	QPSK	1	0	0	23.69	25.23	0.333
					1	49	0	23.67	25.21	0.332
					1	99	0	23.56	25.10	0.324
					50	0	1	22.76	24.30	0.269
					50	24	1	22.68	24.22	0.264
					50	50	1	22.59	24.13	0.259
					100	0	1	22.83	24.37	0.273
				16QAM	1	0	2	21.82	23.36	0.217
				64QAM	1	0	3	20.71	22.25	0.168
				256QAM	1	0	4	19.74	21.28	0.134

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

LTE Band 42 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42	5	42115	3452.5	QPSK	1	0	0	20.57	20.70	0.117
				16QAM	1	0	2	18.54	18.67	0.074
		42590	3500	QPSK	1	0	0	20.46	20.59	0.115
				16QAM	1	0	2	18.72	18.85	0.077
		43065	3547.5	QPSK	1	0	0	20.58	20.71	0.118
				16QAM	1	0	2	18.65	18.78	0.076
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42	10	42140	3455	QPSK	1	0	0	20.62	20.75	0.119
				16QAM	1	0	2	18.58	18.71	0.074
		42590	3500	QPSK	1	0	0	20.54	20.67	0.117
				16QAM	1	0	2	18.74	18.87	0.077
		43040	3545	QPSK	1	0	0	20.62	20.75	0.119
				16QAM	1	0	2	18.68	18.81	0.076
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42	15	42165	3457.5	QPSK	1	0	0	20.65	20.78	0.120
				16QAM	1	0	2	18.60	18.73	0.075
		42590	3500	QPSK	1	0	0	20.62	20.75	0.119
				16QAM	1	0	2	18.80	18.93	0.078
		43015	3542.5	QPSK	1	0	0	20.65	20.78	0.120
				16QAM	1	0	2	18.77	18.90	0.078
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42	20	42190	3460	QPSK	1	0	0	20.72	20.85	0.122
					1	49	0	20.65	20.78	0.120
					1	99	0	20.68	20.81	0.121
					50	0	1	19.82	19.95	0.099
					50	24	1	19.72	19.85	0.097
					50	50	1	19.78	19.91	0.098
					100	0	1	19.73	19.86	0.097
				16QAM	1	0	2	18.75	18.88	0.077
				64QAM	1	0	3	17.84	17.97	0.063
				256QAM	1	0	4	16.73	16.86	0.049
		42590	3500	QPSK	1	0	0	20.81	20.94	0.124
					1	49	0	20.79	20.92	0.124
					1	99	0	20.55	20.68	0.117
					50	0	1	19.96	20.09	0.102
					50	24	1	19.94	20.07	0.102
					50	50	1	19.64	19.77	0.095
					100	0	1	19.90	20.03	0.101
				16QAM	1	0	2	18.91	19.04	0.080
				64QAM	1	0	3	17.95	18.08	0.064
				256QAM	1	0	4	16.88	17.01	0.050
		42990	3540	QPSK	1	0	0	20.67	20.80	0.120
					1	49	0	20.62	20.75	0.119
					1	99	0	20.59	20.72	0.118
					50	0	1	19.78	19.91	0.098
					50	24	1	19.76	19.89	0.098
					50	50	1	19.73	19.86	0.097
					100	0	1	19.68	19.81	0.096
				16QAM	1	0	2	18.75	18.88	0.077
				64QAM	1	0	3	17.76	17.89	0.062
				256QAM	1	0	4	16.69	16.82	0.048

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

LTE Band 71 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
71	5	133147	665.5	QPSK	1	0	0	23.17	20.03	0.101
				16QAM	1	0	2	21.27	18.13	0.065
		133247	675.5	QPSK	1	0	0	23.33	20.19	0.105
				16QAM	1	0	2	21.29	18.15	0.065
		133447	695.5	QPSK	1	0	0	23.07	19.93	0.098
				16QAM	1	0	2	21.12	17.98	0.063
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
71	10	133172	668	QPSK	1	0	0	23.20	20.06	0.101
				16QAM	1	0	2	21.32	18.18	0.066
		133272	678	QPSK	1	0	0	23.36	20.22	0.105
				16QAM	1	0	2	21.38	18.24	0.067
		133422	693	QPSK	1	0	0	23.09	19.95	0.099
				16QAM	1	0	2	21.17	18.03	0.064
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
71	15	133197	670.5	QPSK	1	0	0	23.22	20.08	0.102
				16QAM	1	0	2	21.33	18.19	0.066
		133297	680.5	QPSK	1	0	0	23.43	20.29	0.107
				16QAM	1	0	2	21.41	18.27	0.067
		133397	690.5	QPSK	1	0	0	23.17	20.03	0.101
				16QAM	1	0	2	21.22	18.08	0.064
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
71	20	133222	673	QPSK	1	0	0	23.45	20.31	0.107
					1	49	0	23.28	20.14	0.103
					1	99	0	23.24	20.10	0.102
					50	0	1	22.39	19.25	0.084
					50	24	1	22.26	19.12	0.082
					50	50	1	22.37	19.23	0.084
					100	0	1	22.54	19.40	0.087
				16QAM	1	0	2	21.58	18.44	0.070
				64QAM	1	0	3	20.52	17.38	0.055
				256QAM	1	0	4	19.60	16.46	0.044
		133322	683	QPSK	1	0	0	23.48	20.34	0.108
					1	49	0	23.34	20.20	0.105
					1	99	0	23.36	20.22	0.105
					50	0	1	22.47	19.33	0.086
					50	24	1	22.48	19.34	0.086
					50	50	1	22.46	19.32	0.085
					100	0	1	22.39	19.25	0.084
				16QAM	1	0	2	21.47	18.33	0.068
				64QAM	1	0	3	20.49	17.35	0.054
				256QAM	1	0	4	19.43	16.29	0.043
		133372	688	QPSK	1	0	0	23.30	20.16	0.104
					1	49	0	23.26	20.12	0.103
					1	99	0	23.28	20.14	0.103
					50	0	1	22.38	19.24	0.084
					50	24	1	22.30	19.16	0.082
					50	50	1	22.33	19.19	0.083
					100	0	1	22.39	19.25	0.084
				16QAM	1	0	2	21.34	18.20	0.066
				64QAM	1	0	3	20.35	17.21	0.053
				256QAM	1	0	4	19.45	16.31	0.043

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band CA_7C:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	15 + 10	21051 21171	2530.1 2542.1	QPSK	1	74	1	0	1	22.15	23.62	0.230
		21277 21397	2552.7 2564.7	16QAM	1	74	1	0	2	21.86	23.33	0.215
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	10 + 20	21006 21150	2525.6 2540.0	QPSK	1	49	1	0	1	21.74	23.21	0.209
		21206 21350	2545.6 2560.0	16QAM	1	49	1	0	2	21.58	23.05	0.202
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	20 + 10	21051 21195	2530.1 2544.5	QPSK	1	99	1	0	1	22.44	23.91	0.246
		21251 21395	2550.1 2564.5	16QAM	1	99	1	0	2	21.43	22.90	0.195
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	15 + 15	21025 21175	2527.5 2542.5	QPSK	1	74	1	0	1	22.21	23.68	0.233
		21225 21375	2547.5 2562.5	16QAM	1	74	1	0	2	21.81	23.28	0.213
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	15 + 20	21003 21174	2525.3 2542.4	QPSK	1	74	1	0	1	22.33	23.80	0.240
		21179 21350	2542.9 2560.0	16QAM	1	74	1	0	2	21.68	23.15	0.207
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	20 + 15	21026 21197	2527.6 2544.7	QPSK	1	99	1	0	1	21.87	23.34	0.216
		21201 21372	2545.1 2562.2	16QAM	1	99	1	0	2	21.23	22.70	0.186
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
7C	20 + 20	20850 21048	2510.0 2529.8	QPSK	1	99	1	0	1	22.33	23.80	0.240
				16QAM	1	99	1	0	2	21.67	23.14	0.206
				64QAM	1	99	1	0	3	19.40	20.87	0.122
				256QAM	1	99	1	0	4	17.74	19.21	0.083
		21001 21199	2525.1 2544.9	QPSK	1	99	1	0	1	21.93	23.40	0.219
				16QAM	1	99	1	0	2	21.61	23.08	0.203
				64QAM	1	99	1	0	3	19.52	20.99	0.126
				256QAM	1	99	1	0	4	17.13	18.60	0.072
		21152 21350	2540.2 2560.0	QPSK	1	99	1	0	1	22.04	23.51	0.224
				16QAM	1	99	1	0	2	21.54	23.01	0.200
				64QAM	1	99	1	0	3	19.21	20.68	0.117
				256QAM	1	99	1	0	4	17.50	18.97	0.079

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

LTE Band CA_38C:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38C	15 + 15	37825 37975	2577.5 2595.5	QPSK	1	74	1	0	1	23.26	24.22	0.264
				16QAM	1	74	1	0	2	22.40	23.36	0.217
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
38C	20 + 20	37850 38048	2580.0 2599.8	QPSK	1	99	1	0	1	23.51	24.47	0.280
				16QAM	1	99	1	0	2	22.54	23.50	0.224
				64QAM	1	99	1	0	3	20.46	21.42	0.139
				256QAM	1	99	1	0	4	18.26	19.22	0.084
		37901 38099	2585.1 2604.9	QPSK	1	99	1	0	1	23.37	24.33	0.271
				16QAM	1	99	1	0	2	22.33	23.29	0.213
				64QAM	1	99	1	0	3	20.26	21.22	0.132
				256QAM	1	99	1	0	4	18.13	19.09	0.081
		37952 38150	2590.2 2610.0	QPSK	1	99	1	0	1	23.11	24.07	0.255
				16QAM	1	99	1	0	2	22.56	23.52	0.225
				64QAM	1	99	1	0	3	20.20	21.16	0.131
				256QAM	1	99	1	0	4	18.00	18.96	0.079

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band CA_41C:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	5 + 20	40528	2583.8	QPSK	1	24	1	0	1	23.68	25.22	0.333
		40645	2595.5									
		41373	2668.3	16QAM	1	24	1	0	2	22.33	23.87	0.244
		41490	2680.0									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	20 + 5	40595	2590.5	QPSK	1	99	1	0	1	22.92	24.46	0.279
		40712	2602.2									
		41440	2675.0	16QAM	1	99	1	0	2	22.34	23.88	0.244
		41557	2686.7									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	10 + 15	40549	2585.9	QPSK	1	49	1	0	1	23.02	24.56	0.286
		40669	2597.9									
		41395	2670.5	16QAM	1	49	1	0	2	22.57	24.11	0.258
		41515	2682.5									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	15 + 10	40571	2588.1	QPSK	1	74	1	0	1	23.29	24.83	0.304
		40691	2600.1									
		41417	2672.7	16QAM	1	74	1	0	2	22.49	24.03	0.253
		41537	2684.7									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	10 + 20	40526	2583.6	QPSK	1	49	1	0	1	23.43	24.97	0.314
		40670	2598.0									
		41346	2665.6	16QAM	1	49	1	0	2	22.64	24.18	0.262
		41490	2680.0									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	20 + 10	40571	2588.1	QPSK	1	99	1	0	1	23.20	24.74	0.298
		40715	2602.5									
		41391	2670.1	16QAM	1	99	1	0	2	22.50	24.04	0.254
		41535	2684.5									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	15 + 15	40545	2585.5	QPSK	1	74	1	0	1	23.60	25.14	0.327
		40695	2600.5									
		41365	2667.5	16QAM	1	74	1	0	2	22.32	23.86	0.243
		41515	2682.5									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	15 + 20	40523	2593.3	QPSK	1	74	1	0	1	23.69	25.23	0.333
		40694	2600.4									
		41319	2665.1	16QAM	1	74	1	0	2	22.33	23.87	0.244
		41490	2682.2									
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	20 + 15	40546	2585.6	QPSK	1	99	1	0	1	23.21	24.75	0.299
		40717	2602.7									
		41341	2665.1	16QAM	1	99	1	0	2	22.53	24.07	0.255
		41512	2682.2									

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
41C	20 + 20	39750 39948	2506.0 2525.8	QPSK	1	99	1	0	1	23.59	25.13	0.326
				16QAM	1	99	1	0	2	22.40	23.94	0.248
				64QAM	1	99	1	0	3	20.02	21.56	0.143
				256QAM	1	99	1	0	4	17.95	19.49	0.089
		40521 40719	2583.1 2602.9	QPSK	1	99	1	0	1	23.18	24.72	0.296
				16QAM	1	99	1	0	2	22.60	24.14	0.259
				64QAM	1	99	1	0	3	20.20	21.74	0.149
				256QAM	1	99	1	0	4	18.10	19.64	0.092
		41292 41490	2660.2 2680.0	QPSK	1	99	1	0	1	23.18	24.72	0.296
				16QAM	1	99	1	0	2	22.09	23.63	0.231
				64QAM	1	99	1	0	3	20.59	22.13	0.163
				256QAM	1	99	1	0	4	18.05	19.59	0.091

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band CA_42C:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	5 + 20	41623 41740	3403.3 3415.0	QPSK	1	24	1	0	1	20.37	20.50	0.112
				16QAM	1	24	1	0	2	19.86	19.99	0.100
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	20 + 5	41690 41807	3410.0 3421.7	QPSK	1	99	1	0	1	20.25	20.38	0.109
				16QAM	1	99	1	0	2	20.06	20.19	0.104
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	10 + 20	41645 41789	3405.5 3419.9	QPSK	1	49	1	0	1	21.63	21.76	0.150
				16QAM	1	49	1	0	2	19.75	19.88	0.097
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	20 + 10	41690 41834	3410.0 3424.4	QPSK	1	99	1	0	1	20.35	20.48	0.112
				16QAM	1	99	1	0	2	20.17	20.30	0.107
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	15 + 20	41668 41839	3407.8 3424.9	QPSK	1	74	1	0	1	20.50	20.63	0.116
				16QAM	1	74	1	0	2	20.09	20.22	0.105
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	20 + 15	41690 41861	3410.0 3427.1	QPSK	1	99	1	0	1	21.63	21.76	0.150
				16QAM	1	99	1	0	2	21.63	21.76	0.150
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
42C	20 + 20	41690 41888	3410 3429.8	QPSK	1	99	1	0	1	20.65	20.78	0.120
				16QAM	1	99	1	0	2	20.18	20.31	0.107
				64QAM	1	99	1	0	3	17.97	18.10	0.065
				256QAM	1	99	1	0	4	15.51	15.64	0.037
		42491 42689	3490.1 3509.9	QPSK	1	99	1	0	1	20.59	20.72	0.118
				16QAM	1	99	1	0	2	19.75	19.88	0.097
				64QAM	1	99	1	0	3	17.91	18.04	0.064
				256QAM	1	99	1	0	4	15.52	15.65	0.037
		43292 43490	3570.2 3590	QPSK	1	99	1	0	1	20.67	20.80	0.120
				16QAM	1	99	1	0	2	19.45	19.58	0.091
				64QAM	1	99	1	0	3	17.94	18.07	0.064
				256QAM	1	99	1	0	4	15.88	16.01	0.040

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

LTE Band CA_66B:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	5 + 5	132599 132647	1772.7 1777.5	QPSK	1	24	1	0	1	21.76	23.55	0.226
				16QAM	1	24	1	0	2	21.23	23.02	0.200
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	5 + 10	132550 132622	1767.8 1775.0	QPSK	1	24	1	0	1	21.45	23.24	0.211
				16QAM	1	24	1	0	2	21.51	23.30	0.214
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	10 + 5	132572 132644	1770.0 1777.2	QPSK	1	49	1	0	1	21.43	23.22	0.210
				16QAM	1	49	1	0	2	21.45	23.24	0.211
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	5 + 15	132504 132597	1763.2 1772.5	QPSK	1	24	1	0	1	21.87	23.66	0.232
				16QAM	1	24	1	0	2	21.40	23.19	0.208
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	15 + 5	132549 132642	1767.7 1777.0	QPSK	1	74	1	0	1	21.21	23.00	0.200
				16QAM	1	74	1	0	2	21.05	22.84	0.192
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66B	10 + 10	132022 132121	1715.0 1724.9	QPSK	1	49	1	0	1	21.35	23.14	0.206
				16QAM	1	49	1	0	2	21.43	23.22	0.210
				64QAM	1	49	1	0	3	18.77	20.56	0.114
				256QAM	1	49	1	0	4	17.38	19.17	0.083
		132373 132472	1750.1 1760.0	QPSK	1	49	1	0	1	21.34	23.13	0.206
				16QAM	1	49	1	0	2	21.19	22.98	0.199
				64QAM	1	49	1	0	3	19.29	21.08	0.128
				256QAM	1	49	1	0	4	17.23	19.02	0.080
		132523 132622	1765.1 1775.0	QPSK	1	49	1	0	1	21.58	23.37	0.217
				16QAM	1	49	1	0	2	21.26	23.05	0.202
				64QAM	1	49	1	0	3	19.19	20.98	0.125
				256QAM	1	49	1	0	4	17.40	19.19	0.083

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

LTE Band CA_66C:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
66C	10 + 15	132477 132597	1760.5 1772.5	QPSK	1	49	1	0	1	21.63	23.42	0.220
				16QAM	1	49	1	0	2	21.17	22.96	0.198
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	74	1	0	1	21.67	23.46	0.222
66C	15 + 10	132499 132619	1762.7 1774.7	QPSK	1	74	1	0	1	21.67	23.46	0.222
				16QAM	1	74	1	0	2	21.20	22.99	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	49	1	0	1	21.67	23.46	0.222
66C	10 + 20	132428 132572	1755.6 1770.0	QPSK	1	49	1	0	1	21.67	23.46	0.222
				16QAM	1	49	1	0	2	21.19	22.98	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	99	1	0	1	21.69	23.48	0.223
66C	20 + 10	132473 132617	1760.0 1774.5	QPSK	1	99	1	0	1	21.69	23.48	0.223
				16QAM	1	99	1	0	2	21.17	22.96	0.198
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	74	1	0	1	21.62	23.41	0.219
66C	15 + 15	132447 132597	1757.5 1772.5	QPSK	1	74	1	0	1	21.62	23.41	0.219
				16QAM	1	74	1	0	2	21.14	22.93	0.196
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	74	1	0	1	21.67	23.46	0.222
66C	15 + 20	132401 132572	1752.9 1770.0	QPSK	1	74	1	0	1	21.67	23.46	0.222
				16QAM	1	74	1	0	2	21.19	22.98	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	99	1	0	1	21.64	23.43	0.220
66C	20 + 15	132423 132594	1755.1 1772.2	QPSK	1	99	1	0	1	21.64	23.43	0.220
				16QAM	1	99	1	0	2	21.17	22.96	0.198
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	99	1	0	1	21.69	23.48	0.223
66C	20 + 5	132522 132639	1765.0 1776.7	QPSK	1	99	1	0	1	21.69	23.48	0.223
				16QAM	1	99	1	0	2	21.20	22.99	0.199
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	24	1	0	1	21.61	23.40	0.219
66C	5 + 20	132455 132572	1758.3 1770.0	QPSK	1	24	1	0	1	21.61	23.40	0.219
				16QAM	1	24	1	0	2	21.23	23.02	0.200
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	PCC UL RB Allocation	PCC UL RB Offset	SCC UL RB Allocation	SCC UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
				QPSK	1	99	1	0	1	21.43	23.22	0.210
66C	20 + 20	132072 132270	1720.0 1739.8	16QAM	1	99	1	0	2	21.41	23.20	0.209
				64QAM	1	99	1	0	3	19.28	21.07	0.128
				256QAM	1	99	1	0	4	17.35	19.14	0.082
				QPSK	1	99	1	0	1	21.97	23.76	0.238
		132323 132521	1745.1 1764.9	16QAM	1	99	1	0	2	21.36	23.15	0.207
				64QAM	1	99	1	0	3	19.03	20.82	0.121
				256QAM	1	99	1	0	4	17.22	19.01	0.080
				QPSK	1	99	1	0	1	21.85	23.64	0.231
		132374 132572	1750.2 1770.0	16QAM	1	99	1	0	2	21.14	22.93	0.196
				64QAM	1	99	1	0	3	18.84	20.63	0.116
				256QAM	1	99	1	0	4	16.81	18.60	0.072
				QPSK	1	99	1	0	1	21.85	23.64	0.231

NOTE:


(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

APPENDIX B RADIATED SPURIOUS EMISSIONS

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1413	Polarization	Vertical
Temp	26°C	Hum.	52%

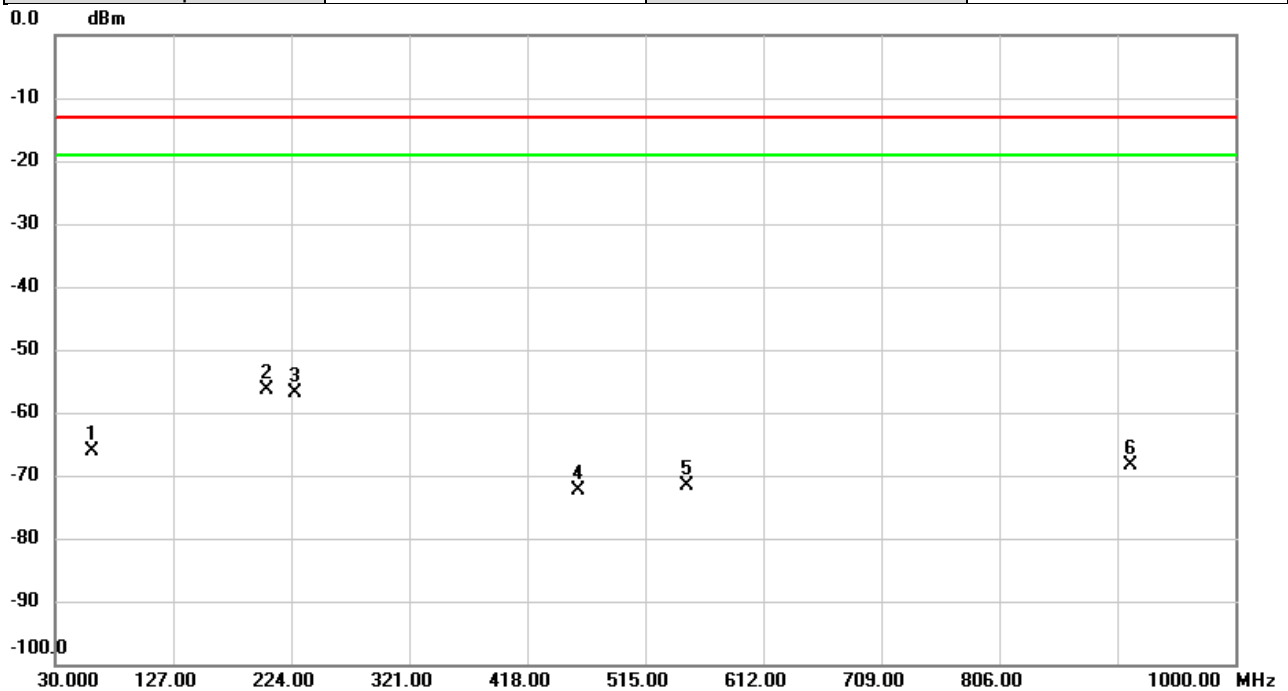


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.8760	-58.31	-7.75	-66.06	-13.00	-53.06	peak	
2	*	203.7270	-52.89	-3.39	-56.28	-13.00	-43.28	peak	
3		227.6537	-53.90	-3.05	-56.95	-13.00	-43.95	peak	
4		460.4537	-71.46	-1.01	-72.47	-13.00	-59.47	peak	
5		549.4997	-74.31	2.80	-71.51	-13.00	-58.51	peak	
6		913.9610	-75.13	6.73	-68.40	-13.00	-55.40	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1413	Polarization	Horizontal
Temp	26°C	Hum.	52%

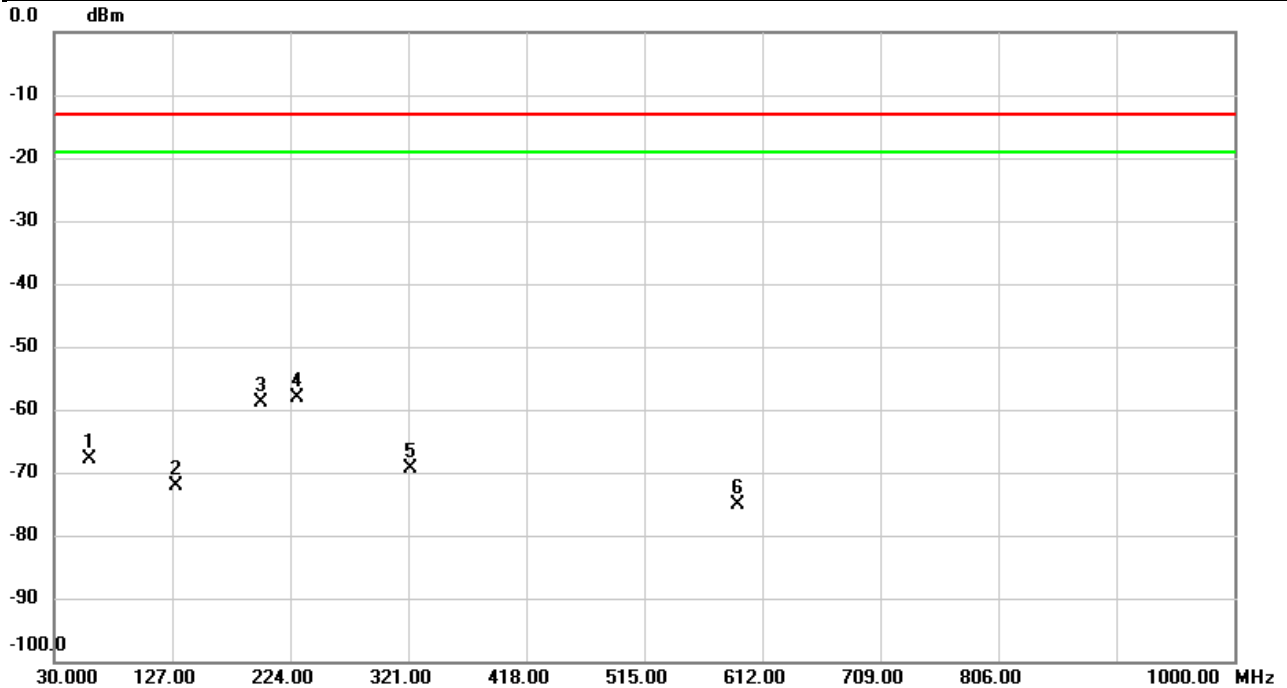


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.7143	-63.78	-4.00	-67.78	-13.00	-54.78	peak	
2		130.2332	-65.61	-6.55	-72.16	-13.00	-59.16	peak	
3		200.2996	-49.24	-9.61	-58.85	-13.00	-45.85	peak	
4	*	229.2380	-50.12	-8.05	-58.17	-13.00	-45.17	peak	
5		323.0370	-64.75	-4.52	-69.27	-13.00	-56.27	peak	
6		591.5653	-75.24	0.09	-75.15	-13.00	-62.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1312	Polarization	Vertical
Temp	26°C	Hum.	52%

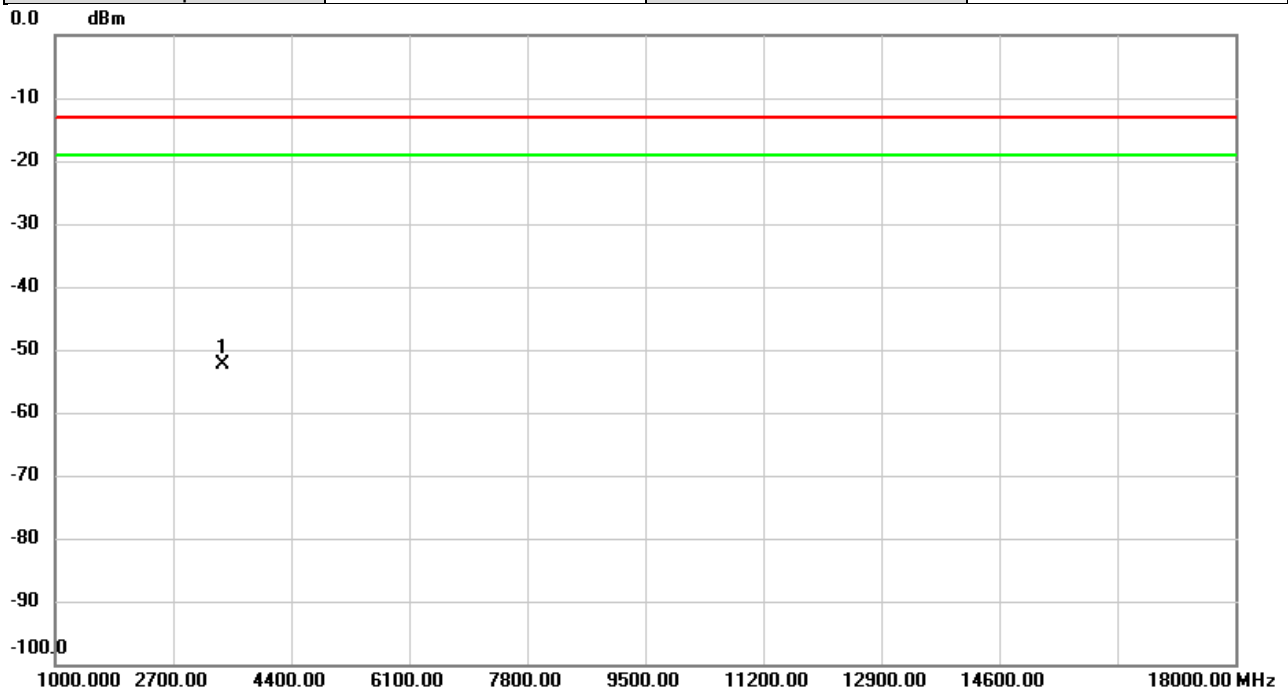


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3424.800	-62.50	10.10	-52.40	-13.00	-39.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1312	Polarization	Horizontal
Temp	26°C	Hum.	52%

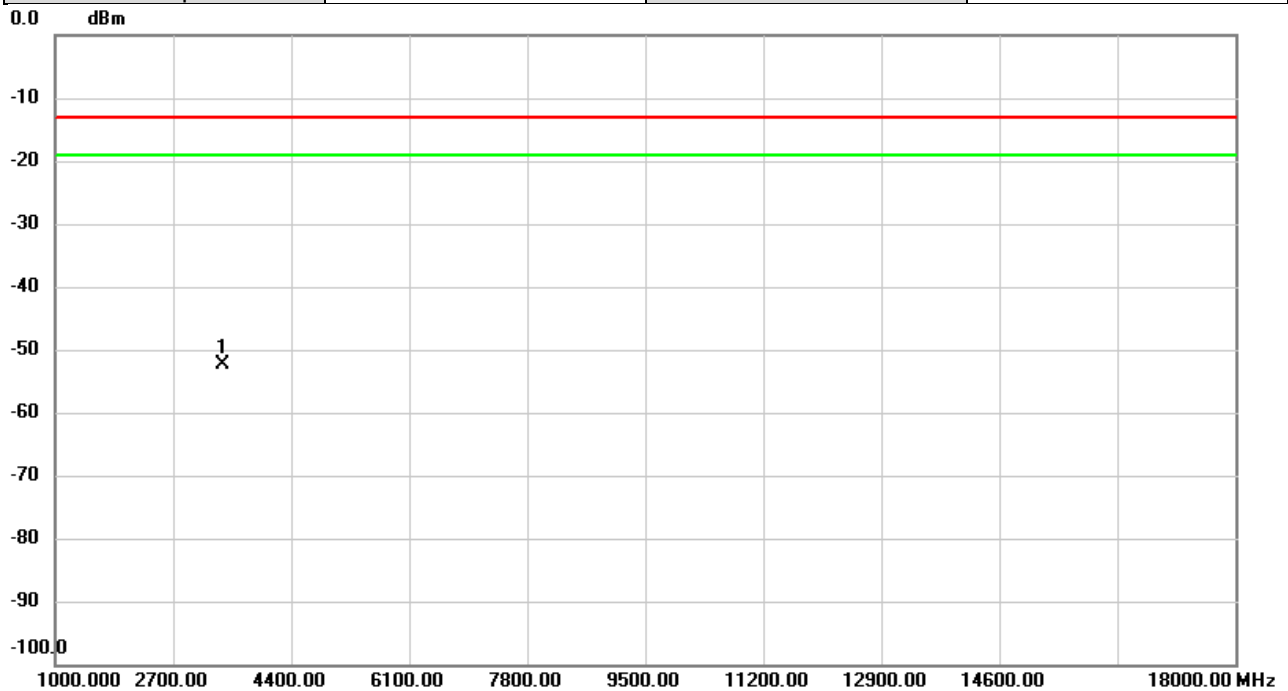


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3424.800	-62.09	9.75	-52.34	-13.00	-39.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1413	Polarization	Vertical
Temp	26°C	Hum.	52%

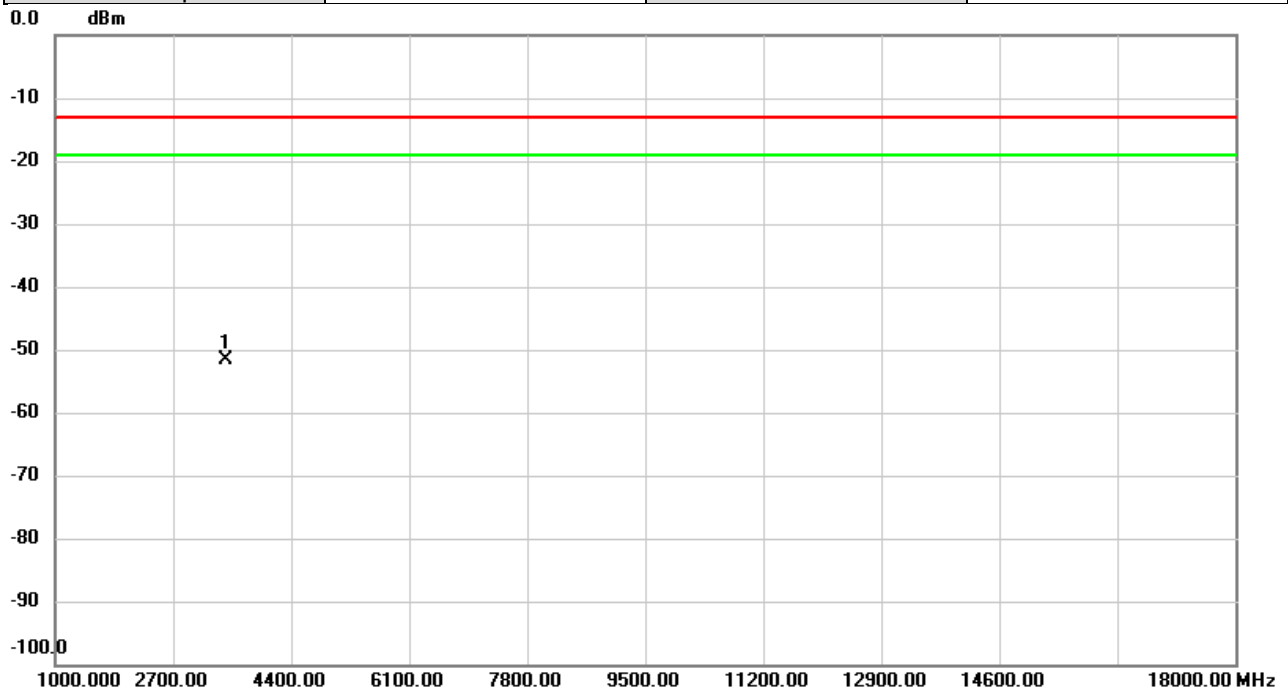


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3465.200	-62.03	10.29	-51.74	-13.00	-38.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1413	Polarization	Horizontal
Temp	26°C	Hum.	52%

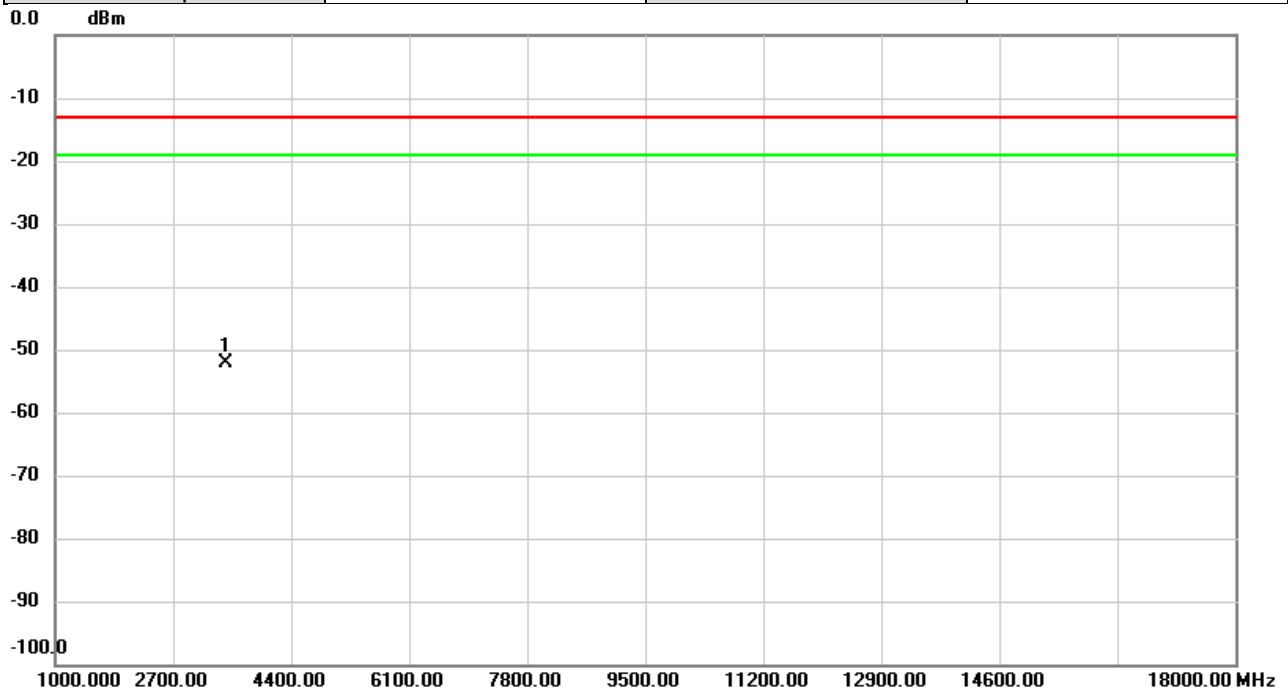


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3465.200	-62.21	10.04	-52.17	-13.00	-39.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1513	Polarization	Vertical
Temp	26°C	Hum.	52%

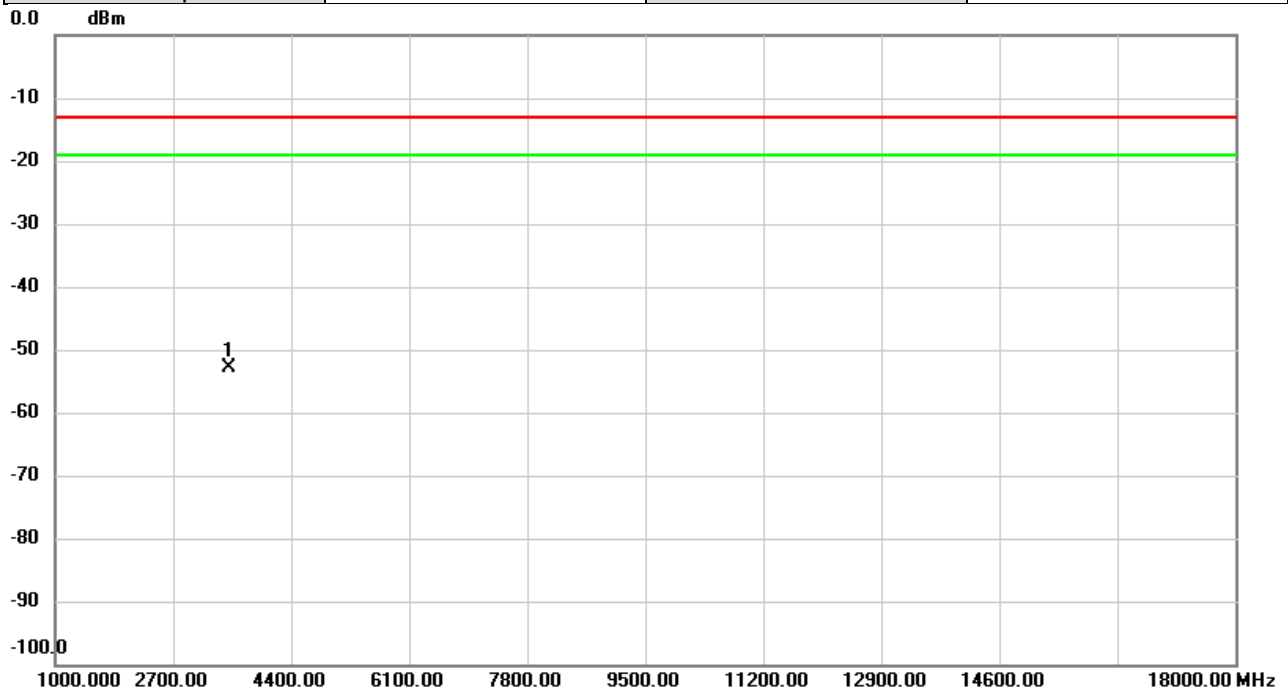


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3505.200	-63.07	10.18	-52.89	-13.00	-39.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band IV	Test Date	2025/5/5
Test Channel	CH1513	Polarization	Horizontal
Temp	26°C	Hum.	52%

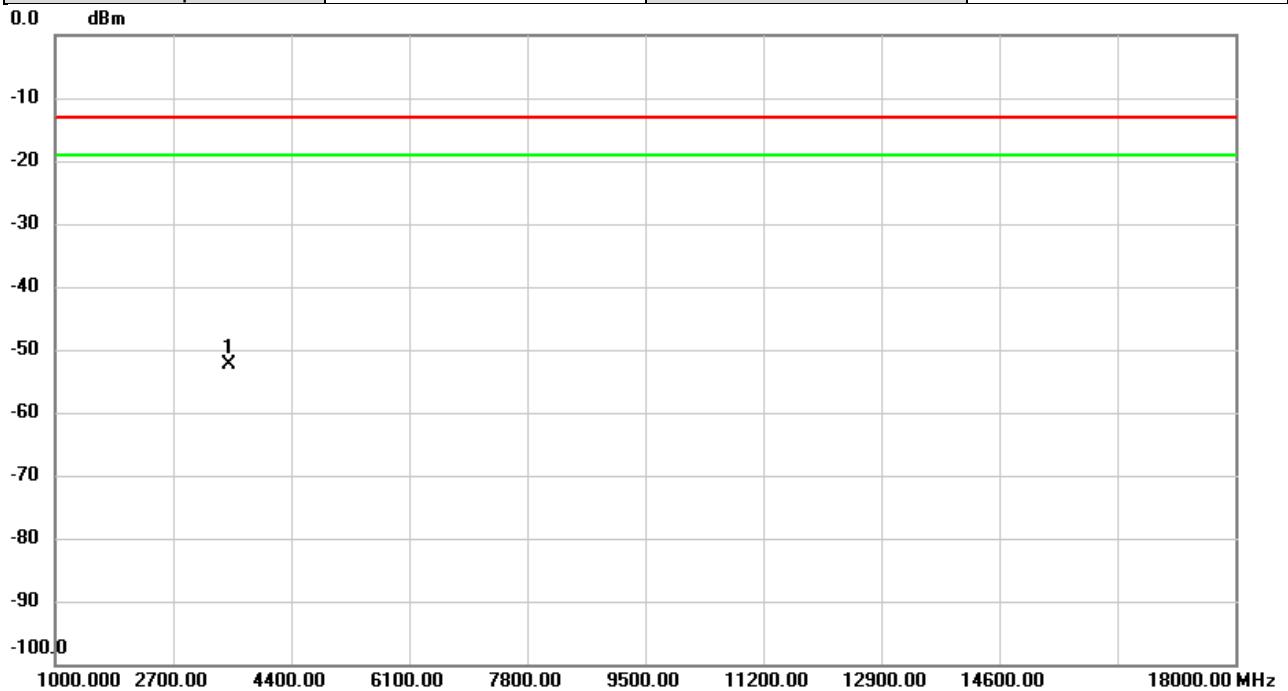


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3505.200	-62.34	9.95	-52.39	-13.00	-39.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/5/2
Test Channel	CH20300	Polarization	Vertical
Temp	27°C	Hum.	61%

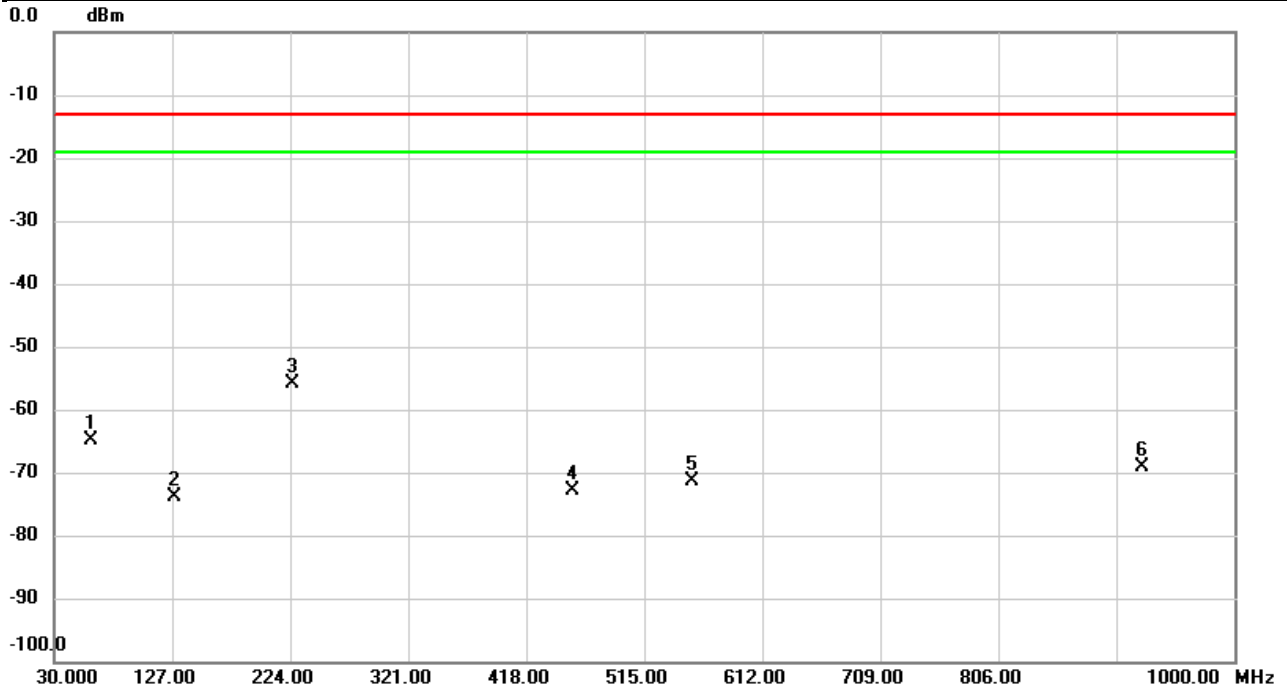


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.7790	-57.21	-7.74	-64.95	-13.00	-51.95	peak	
2		128.4550	-68.10	-5.83	-73.93	-13.00	-60.93	peak	
3	*	225.4873	-52.61	-3.28	-55.89	-13.00	-42.89	peak	
4		455.5067	-71.65	-1.14	-72.79	-13.00	-59.79	peak	
5		555.0933	-74.18	2.87	-71.31	-13.00	-58.31	peak	
6		924.9543	-76.01	6.78	-69.23	-13.00	-56.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/5/2
Test Channel	CH20300	Polarization	Horizontal
Temp	27°C	Hum.	61%

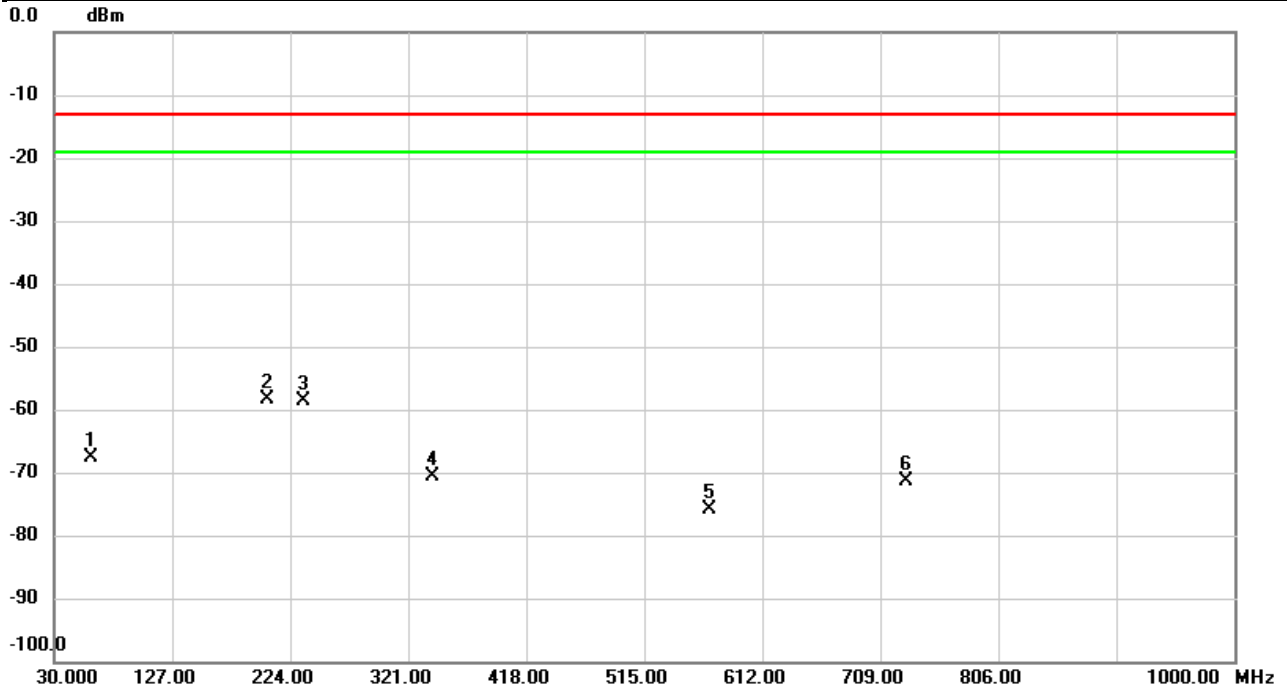


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		60.0700	-63.61	-4.11	-67.72	-13.00	-54.72	peak	
2	*	205.0525	-48.71	-9.55	-58.26	-13.00	-45.26	peak	
3		235.4136	-50.56	-8.11	-58.67	-13.00	-45.67	peak	
4		341.2083	-67.41	-3.19	-70.60	-13.00	-57.60	peak	
5		568.4146	-75.66	-0.29	-75.95	-13.00	-62.95	peak	
6		730.6633	-74.44	3.16	-71.28	-13.00	-58.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20050	Polarization	Vertical
Temp	25°C	Hum.	59%

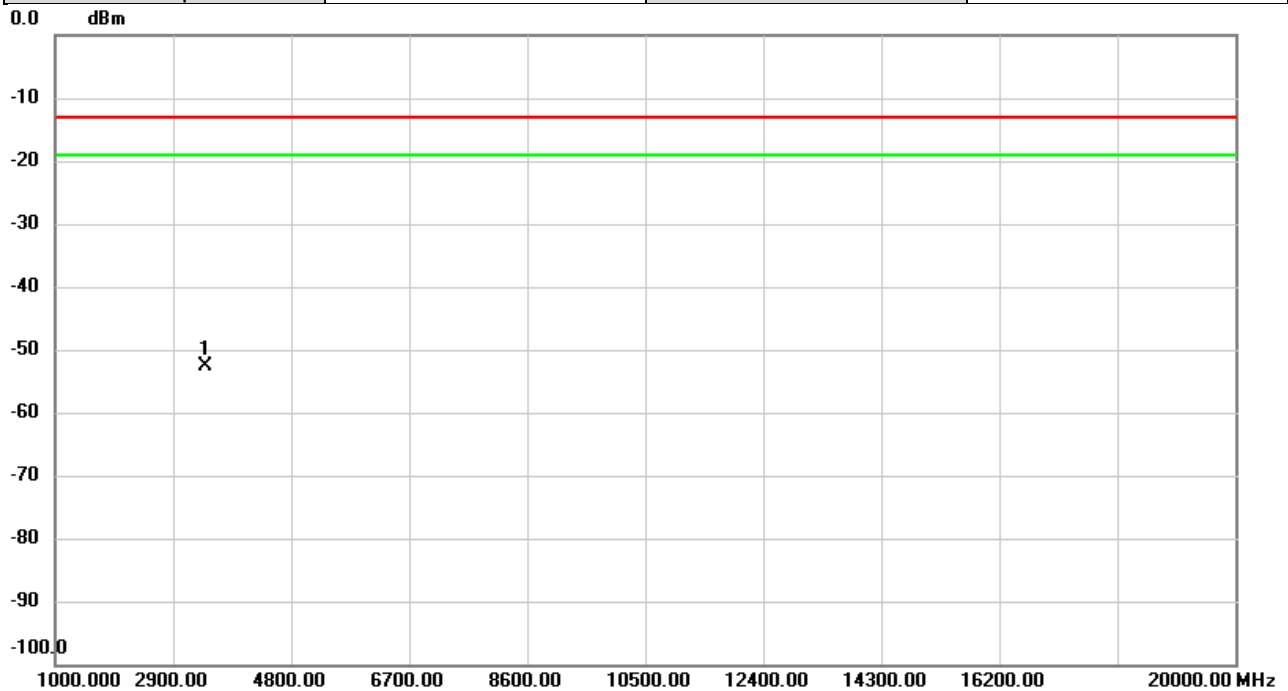


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3422.000	-62.75	10.07	-52.68	-13.00	-39.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20050	Polarization	Horizontal
Temp	25°C	Hum.	59%

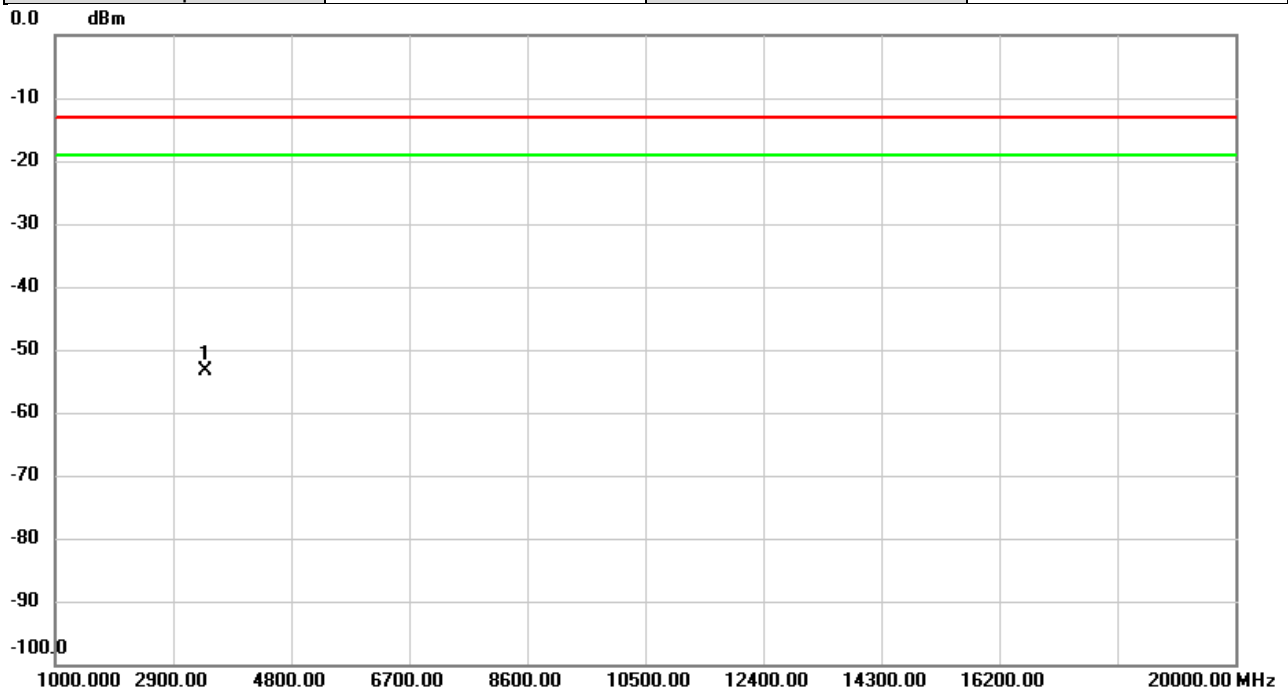


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3422.000	-63.09	9.71	-53.38	-13.00	-40.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20175	Polarization	Vertical
Temp	25°C	Hum.	59%

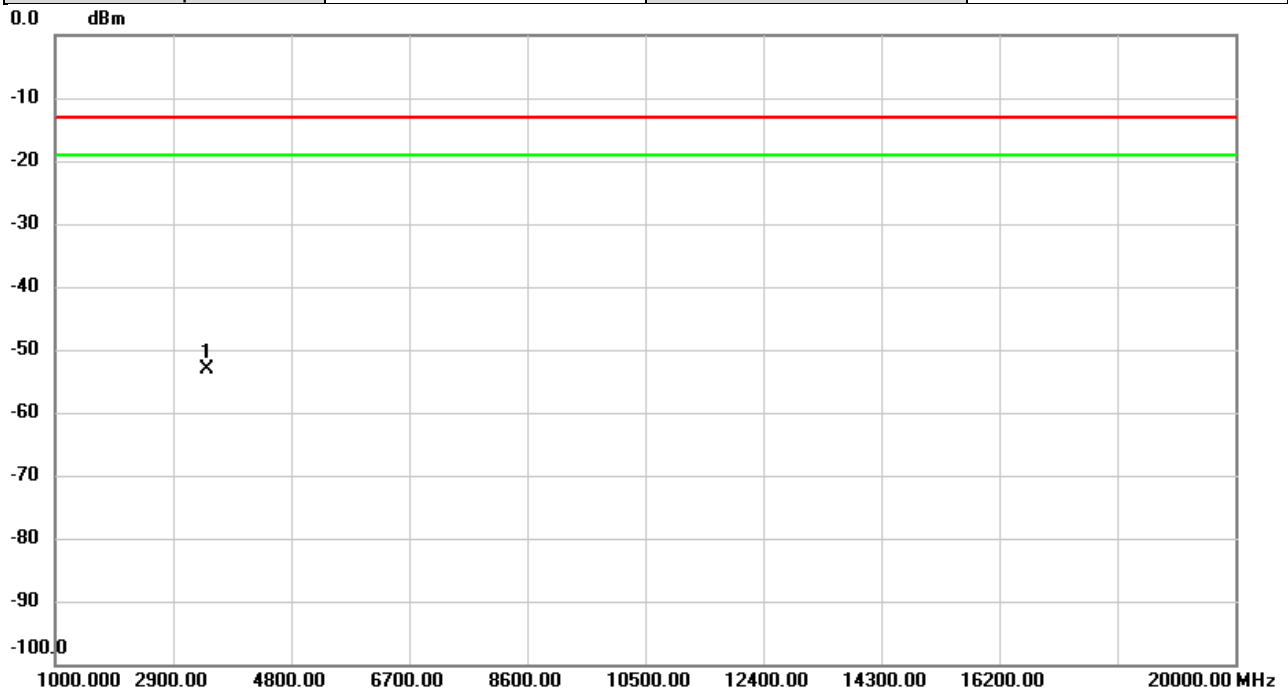


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3447.000	-63.33	10.31	-53.02	-13.00	-40.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20175	Polarization	Horizontal
Temp	25°C	Hum.	59%

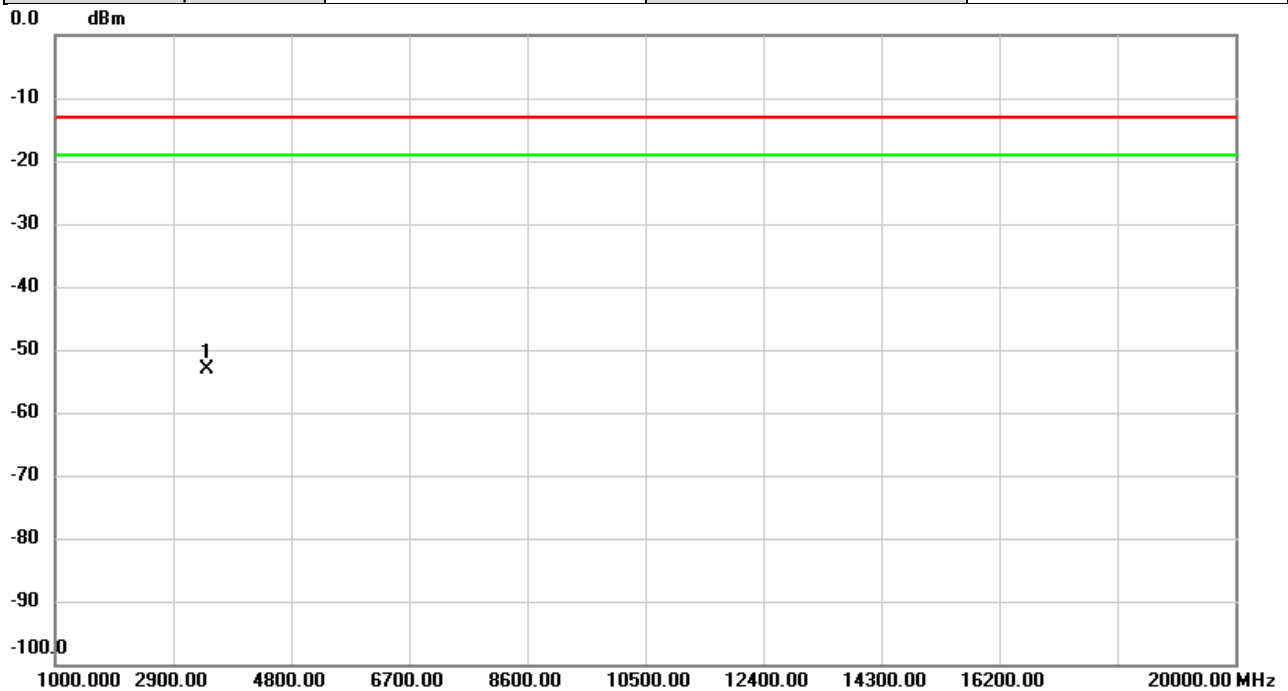


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3447.000	-63.06	10.05	-53.01	-13.00	-40.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20300	Polarization	Vertical
Temp	25°C	Hum.	59%

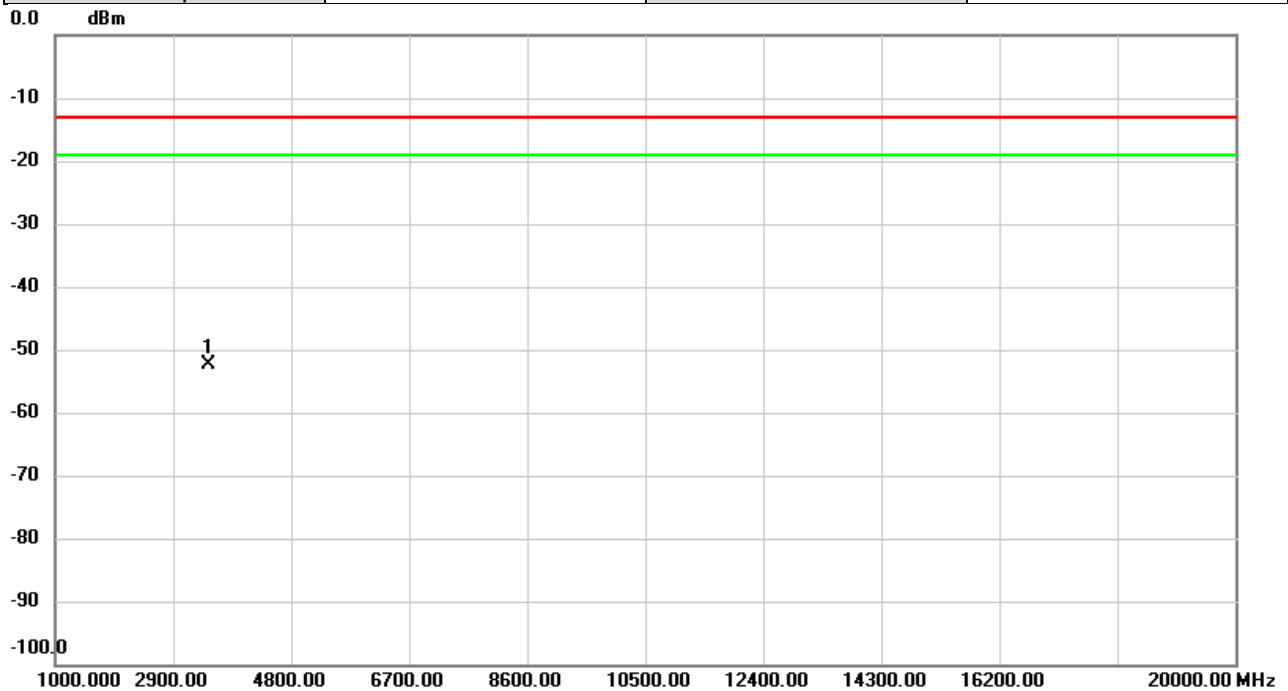


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3472.000	-62.53	10.26	-52.27	-13.00	-39.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 4	Test Date	2025/4/29
Test Channel	CH20300	Polarization	Horizontal
Temp	25°C	Hum.	59%

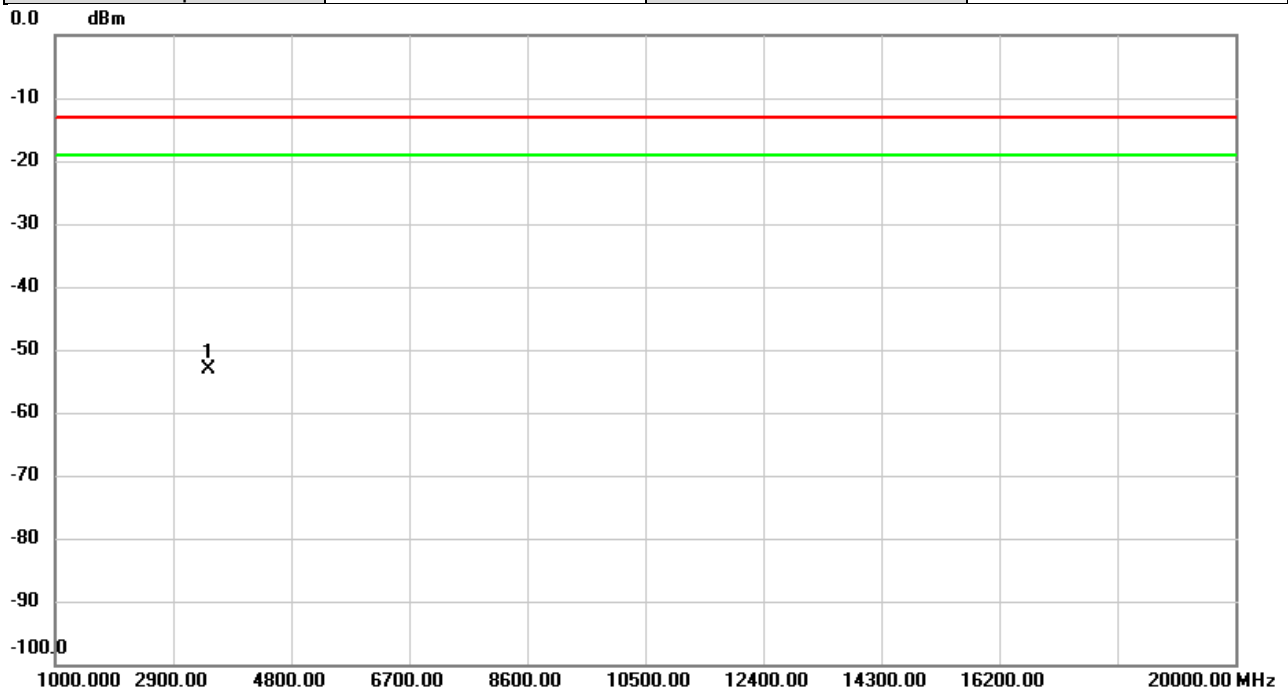


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3472.000	-63.20	10.02	-53.18	-13.00	-40.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/5/2
Test Channel	CH21350	Polarization	Vertical
Temp	27°C	Hum.	61%

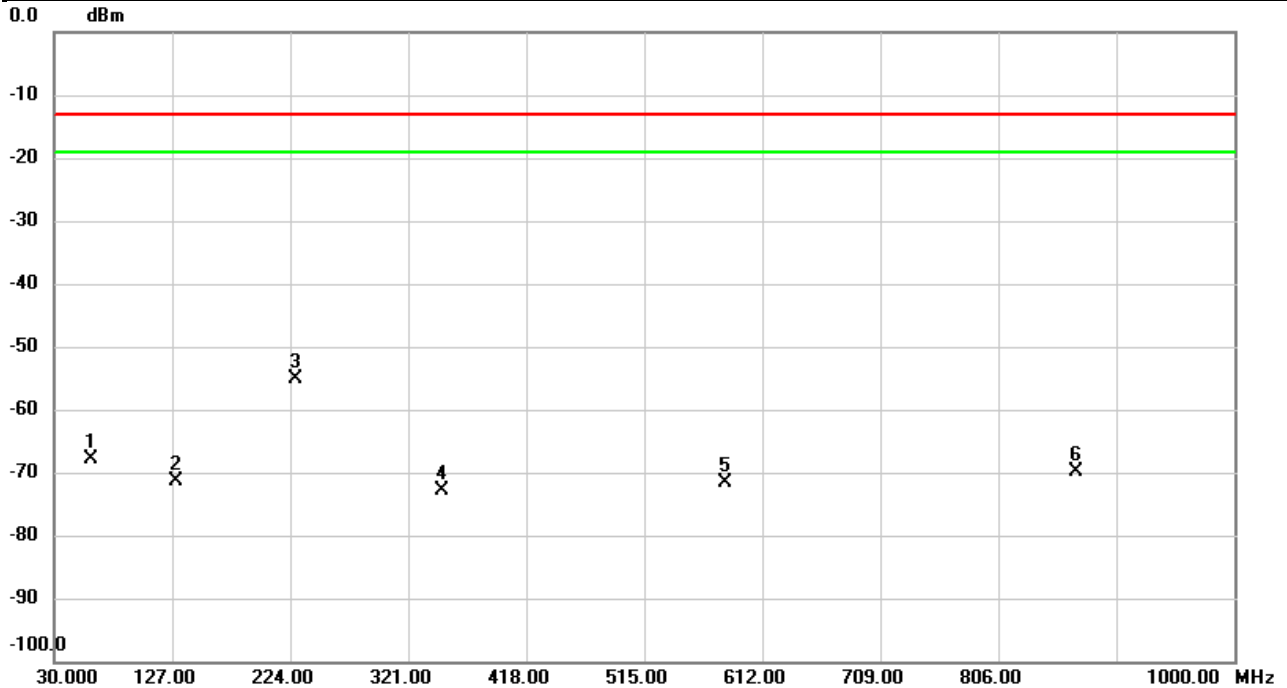


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.8760	-60.18	-7.75	-67.93	-13.00	-54.93	peak	
2		130.3950	-65.93	-5.48	-71.41	-13.00	-58.41	peak	
3	*	228.9470	-52.17	-2.91	-55.08	-13.00	-42.08	peak	
4		349.1947	-70.05	-2.90	-72.95	-13.00	-59.95	peak	
5		582.0593	-74.72	3.11	-71.61	-13.00	-58.61	peak	
6		869.5673	-75.53	5.71	-69.82	-13.00	-56.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/5/2
Test Channel	CH21350	Polarization	Horizontal
Temp	27°C	Hum.	61%

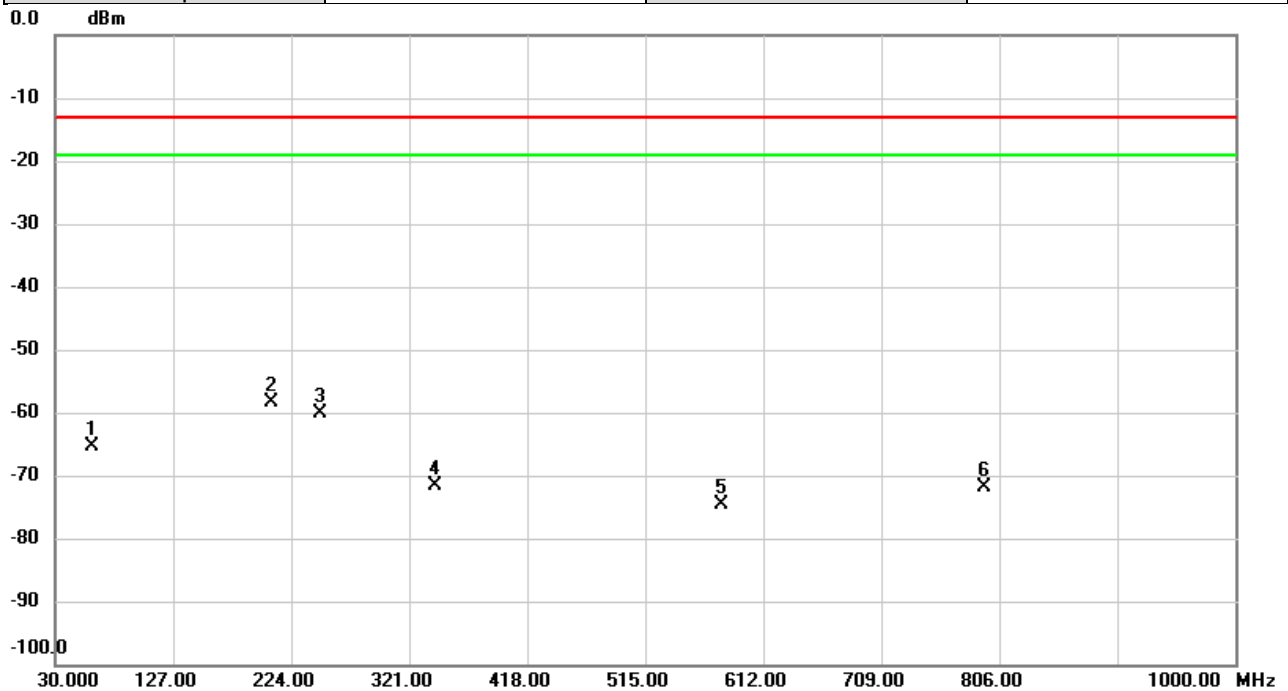


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		60.2317	-61.26	-4.14	-65.40	-13.00	-52.40	peak	
2	*	207.8657	-48.87	-9.52	-58.39	-13.00	-45.39	peak	
3		247.7003	-52.11	-8.11	-60.22	-13.00	-47.22	peak	
4		342.5987	-68.41	-3.09	-71.50	-13.00	-58.50	peak	
5		577.6620	-74.51	-0.14	-74.65	-13.00	-61.65	peak	
6		793.4223	-75.87	3.96	-71.91	-13.00	-58.91	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH20850	Polarization	Vertical
Temp	25°C	Hum.	59%

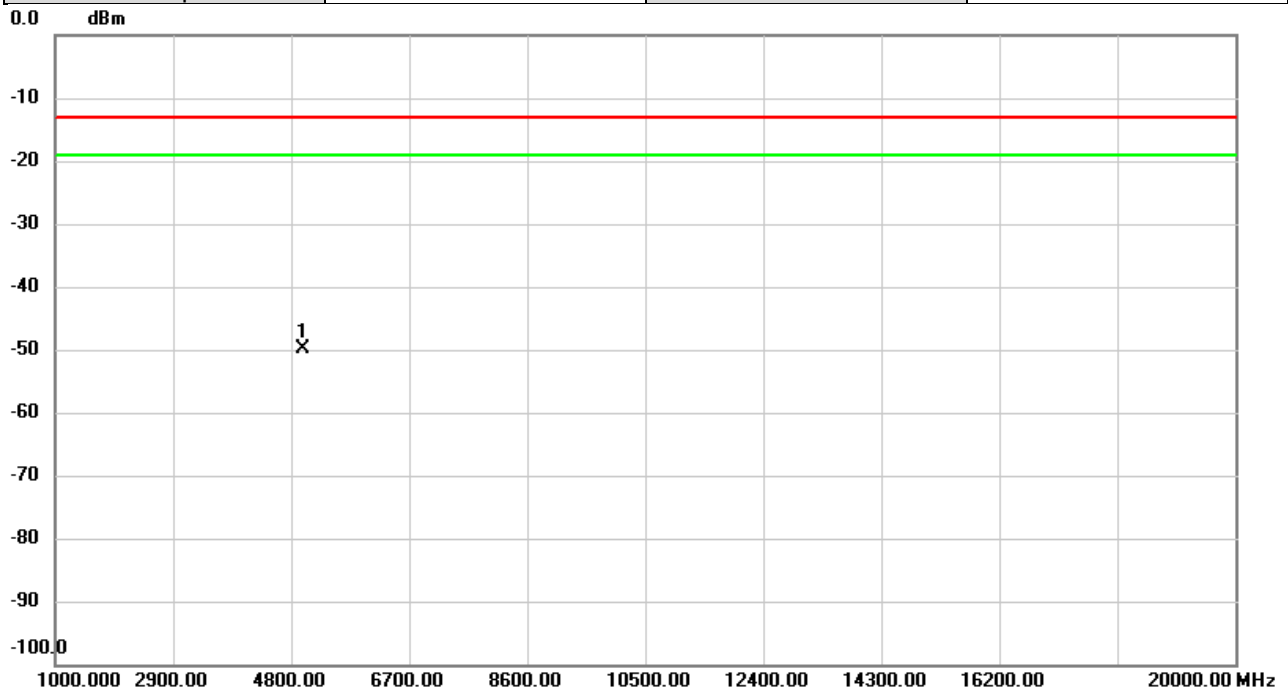


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5002.000	-63.41	13.58	-49.83	-13.00	-36.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH20850	Polarization	Horizontal
Temp	25°C	Hum.	59%

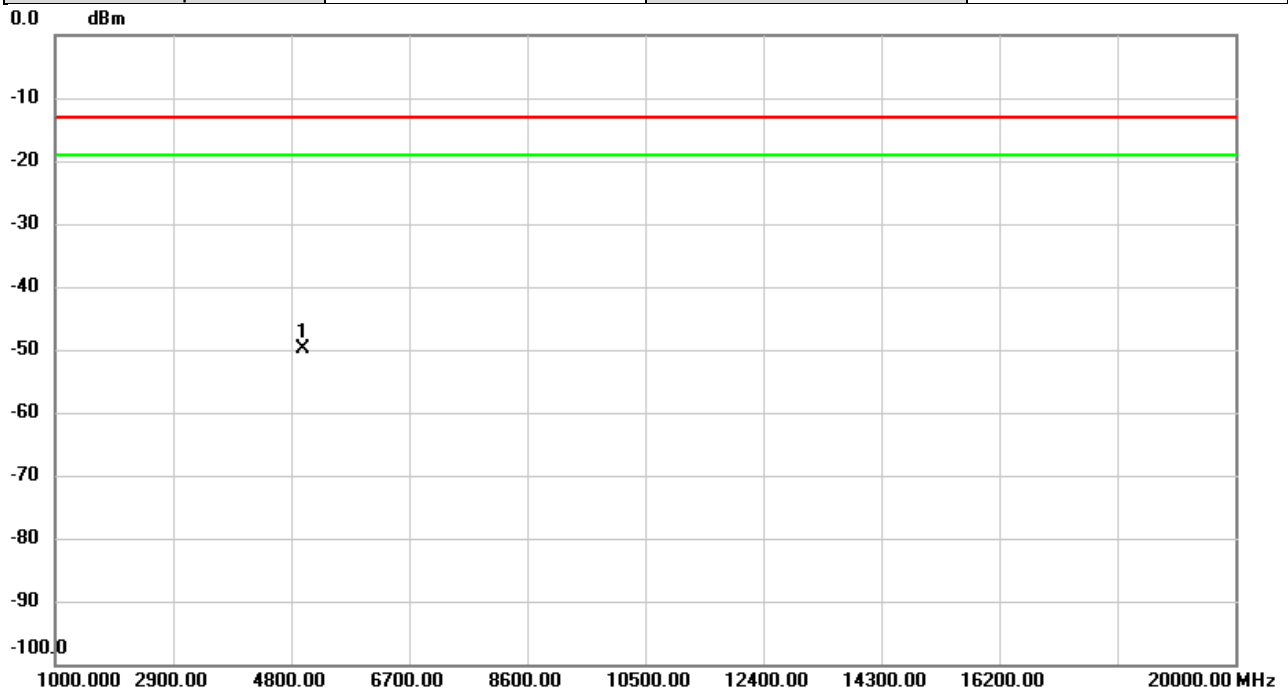


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5002.000	-63.19	13.31	-49.88	-13.00	-36.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH21100	Polarization	Vertical
Temp	25°C	Hum.	59%

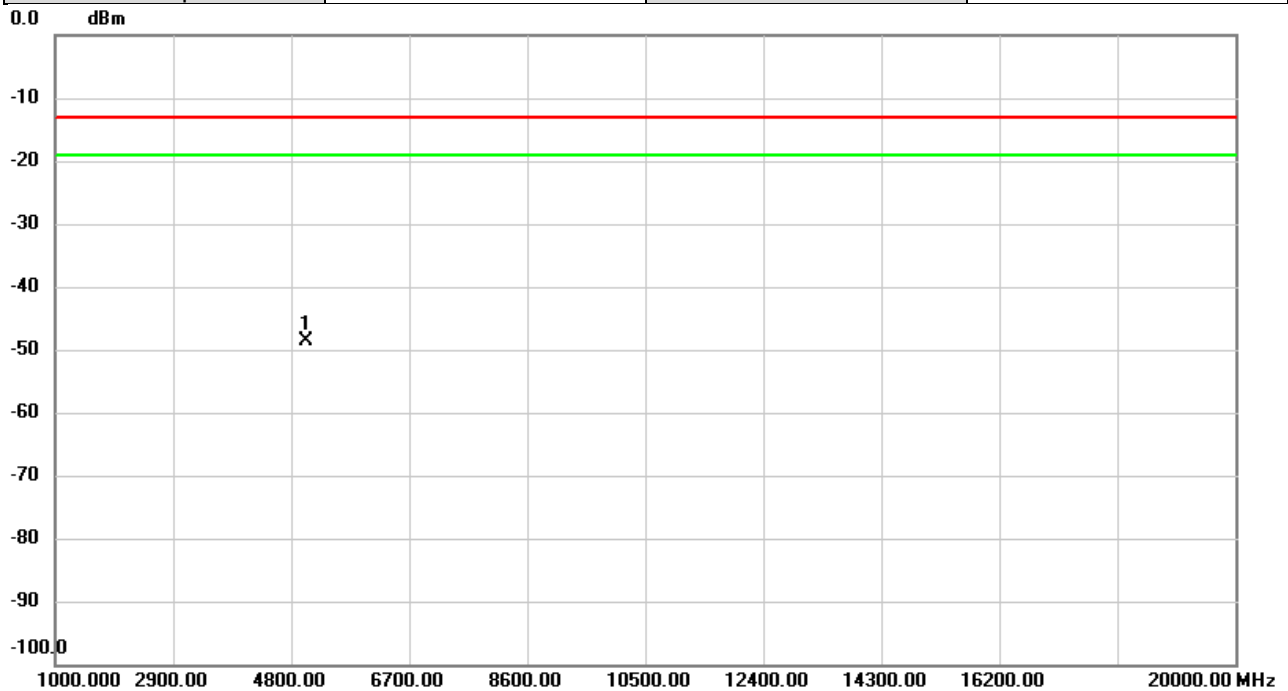


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5052.000	-62.90	14.20	-48.70	-13.00	-35.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH21100	Polarization	Horizontal
Temp	25°C	Hum.	59%

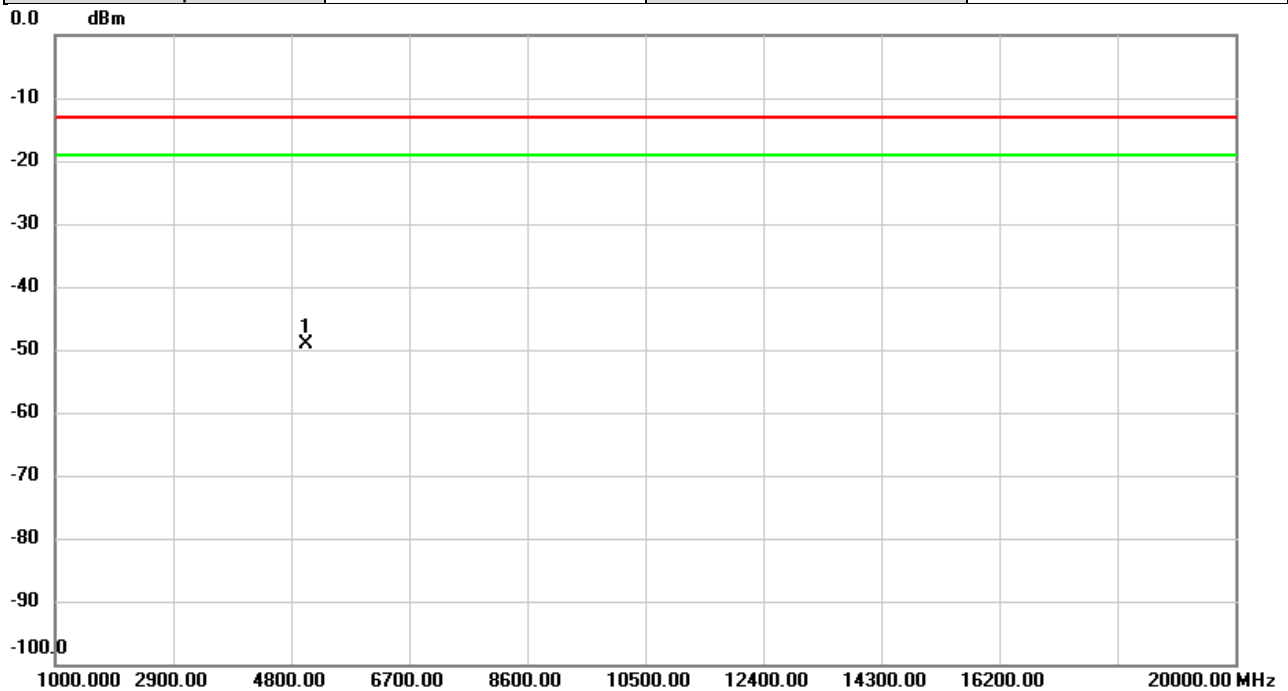


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5052.000	-63.11	14.05	-49.06	-13.00	-36.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH21350	Polarization	Vertical
Temp	25°C	Hum.	59%

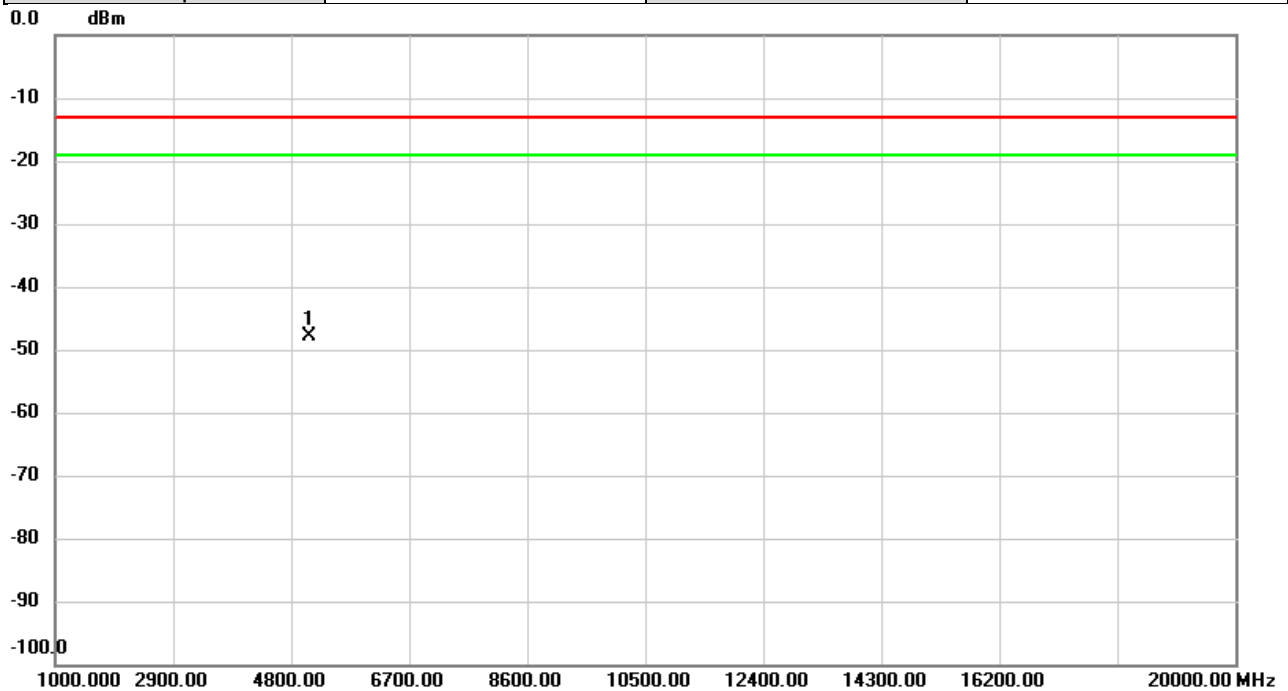


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5102.000	-61.89	13.99	-47.90	-13.00	-34.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/4/29
Test Channel	CH21350	Polarization	Horizontal
Temp	25°C	Hum.	59%

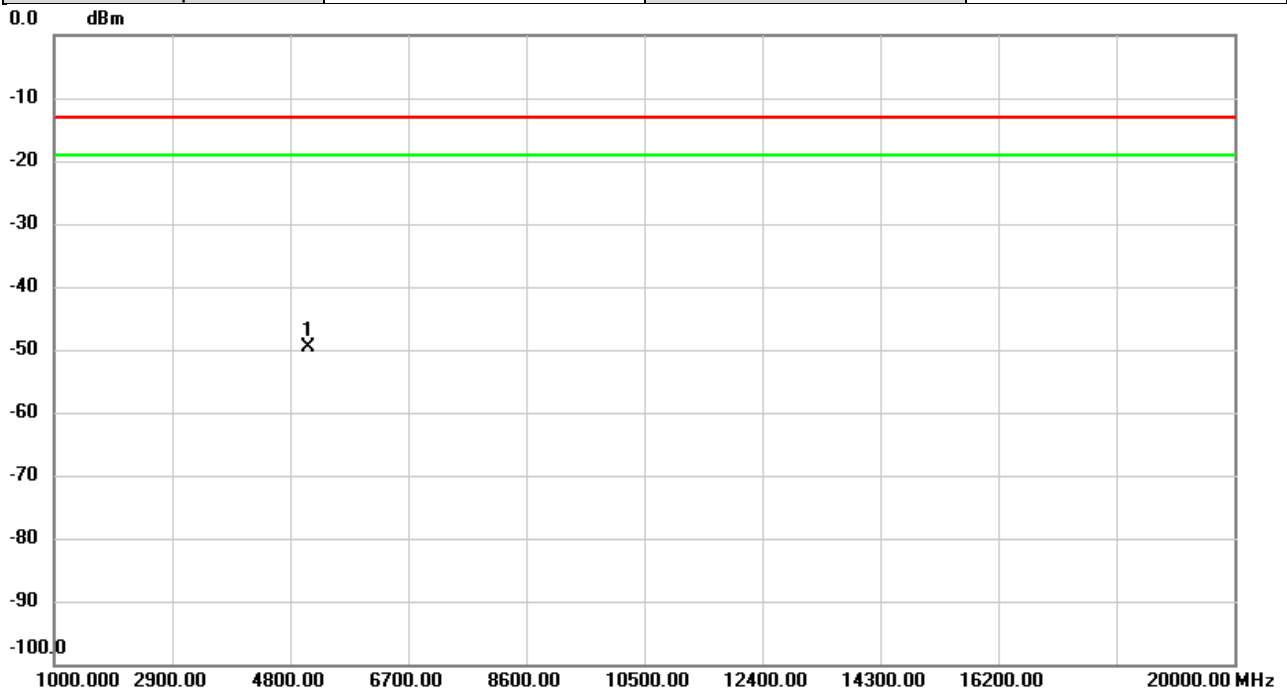


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5102.000	-63.50	13.79	-49.71	-13.00	-36.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/5/2
Test Channel	CH21350	Polarization	Vertical
Temp	27°C	Hum.	61%

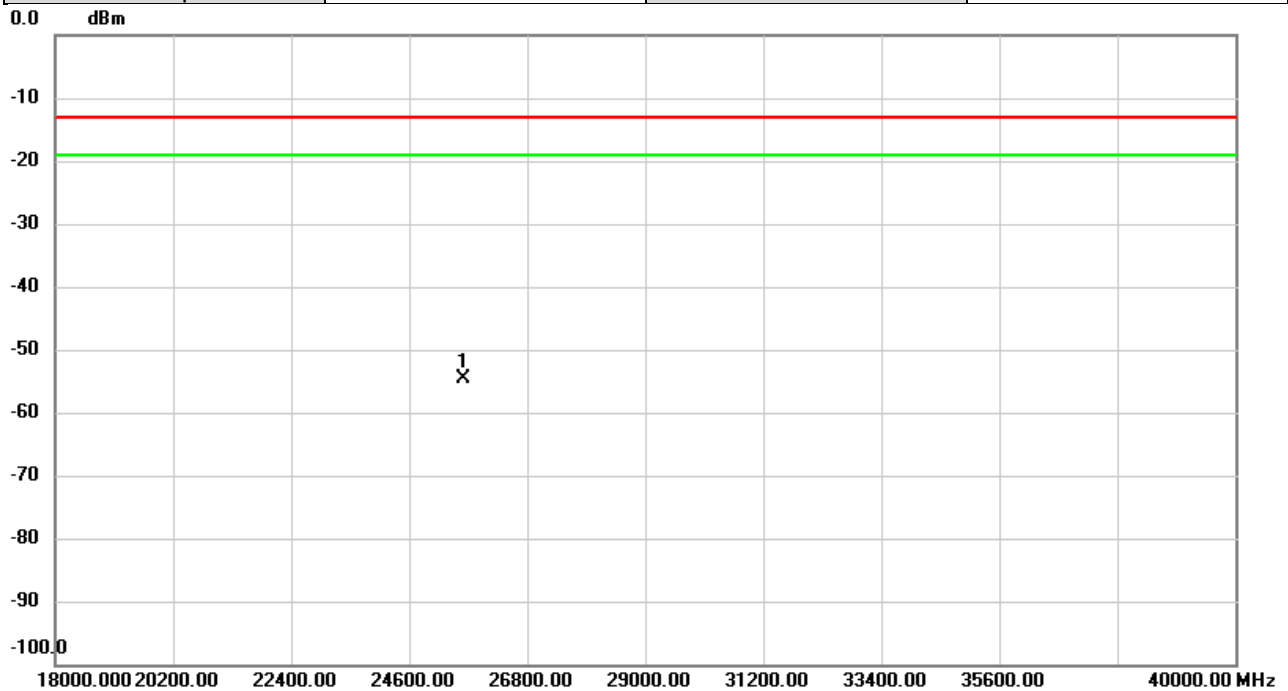


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25600.00	-57.55	2.99	-54.56	-13.00	-41.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 7	Test Date	2025/5/2
Test Channel	CH21350	Polarization	Horizontal
Temp	27°C	Hum.	61%

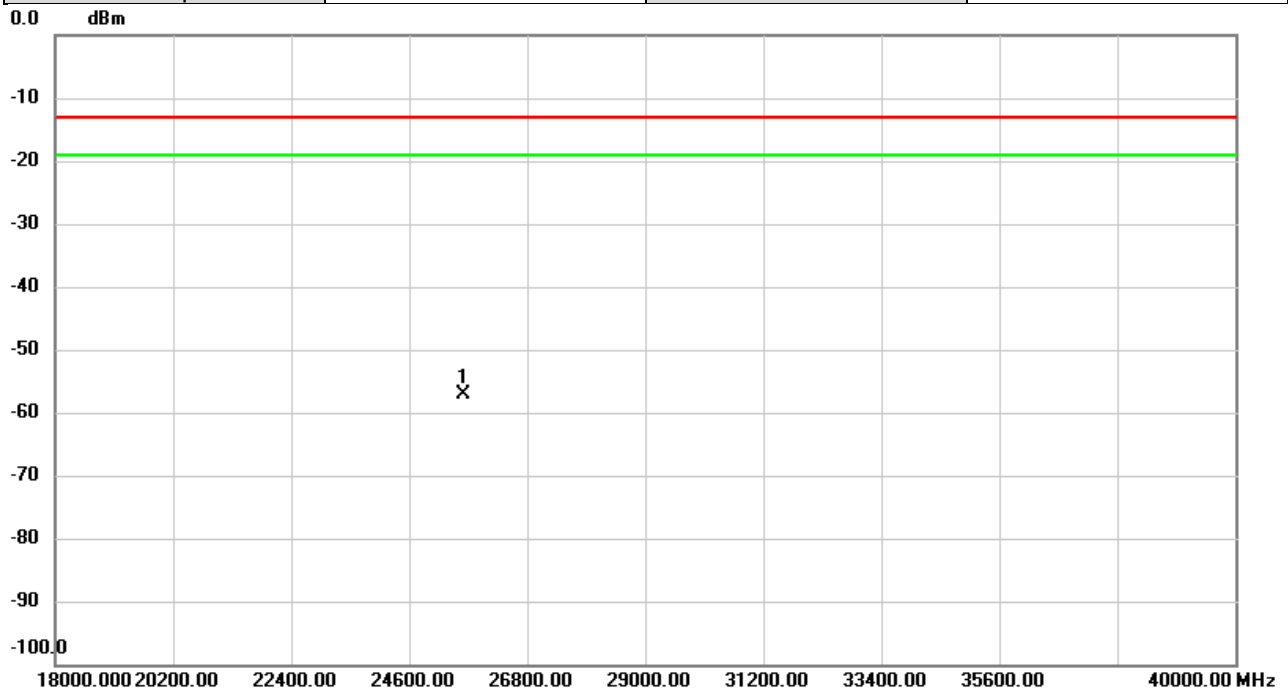


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	25600.00	-58.64	1.58	-57.06	-13.00	-44.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/5/2
Test Channel	CH23130	Polarization	Vertical
Temp	27°C	Hum.	61%

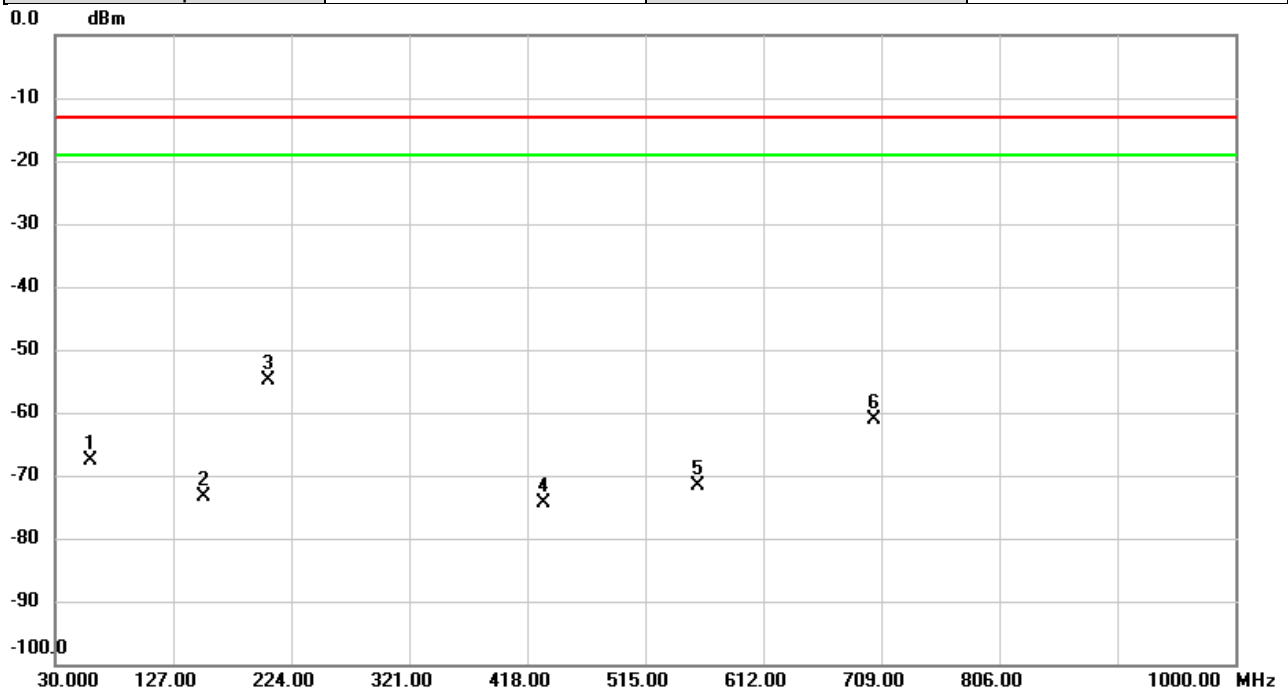


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.4557	-59.92	-7.69	-67.61	-13.00	-54.61	peak	
2		151.9290	-70.79	-2.67	-73.46	-13.00	-60.46	peak	
3	*	205.1820	-51.44	-3.39	-54.83	-13.00	-41.83	peak	
4		431.7740	-72.66	-1.66	-74.32	-13.00	-61.32	peak	
5		558.5530	-74.61	2.91	-71.70	-13.00	-58.70	peak	
6		703.0830	-64.83	3.80	-61.03	-13.00	-48.03	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/5/2
Test Channel	CH23130	Polarization	Horizontal
Temp	27°C	Hum.	61%

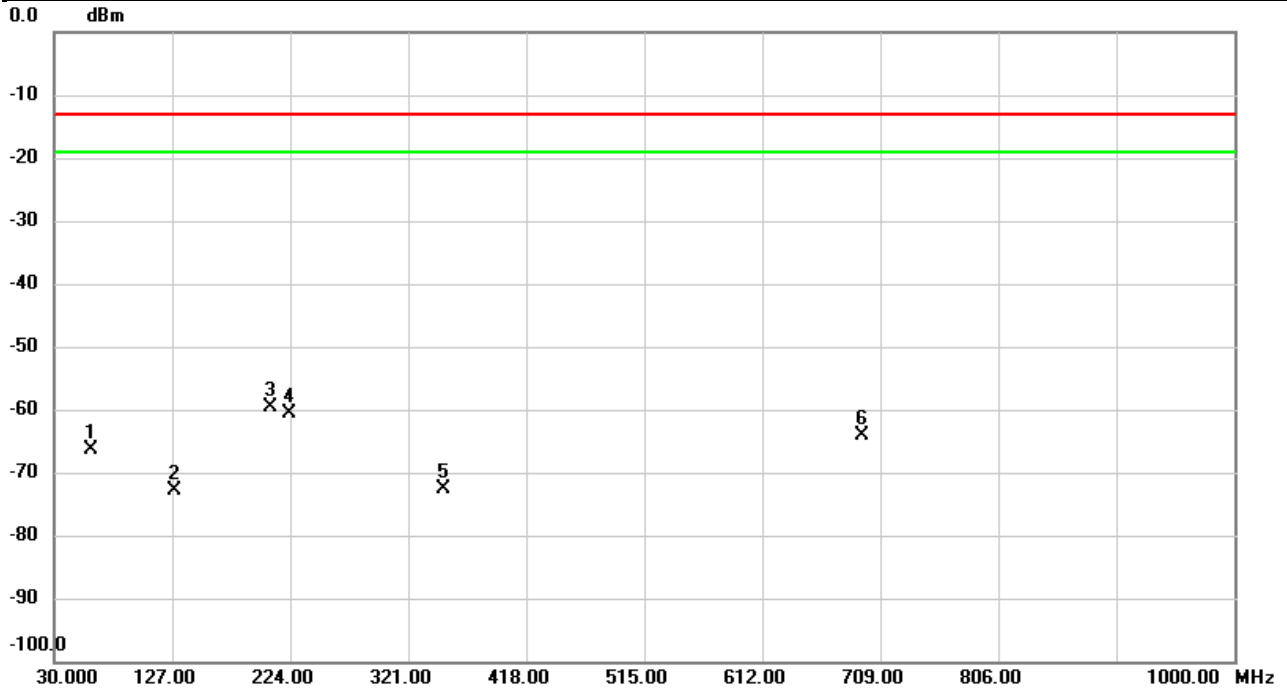


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.7467	-62.37	-4.01	-66.38	-13.00	-53.38	peak	
2		128.6490	-66.10	-6.69	-72.79	-13.00	-59.79	peak	
3	*	208.2213	-50.19	-9.52	-59.71	-13.00	-46.71	peak	
4		223.3533	-51.99	-8.74	-60.73	-13.00	-47.73	peak	
5		349.5503	-70.03	-2.58	-72.61	-13.00	-59.61	peak	
6		694.1913	-66.47	2.36	-64.11	-13.00	-51.11	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23060	Polarization	Vertical
Temp	26°C	Hum.	54%

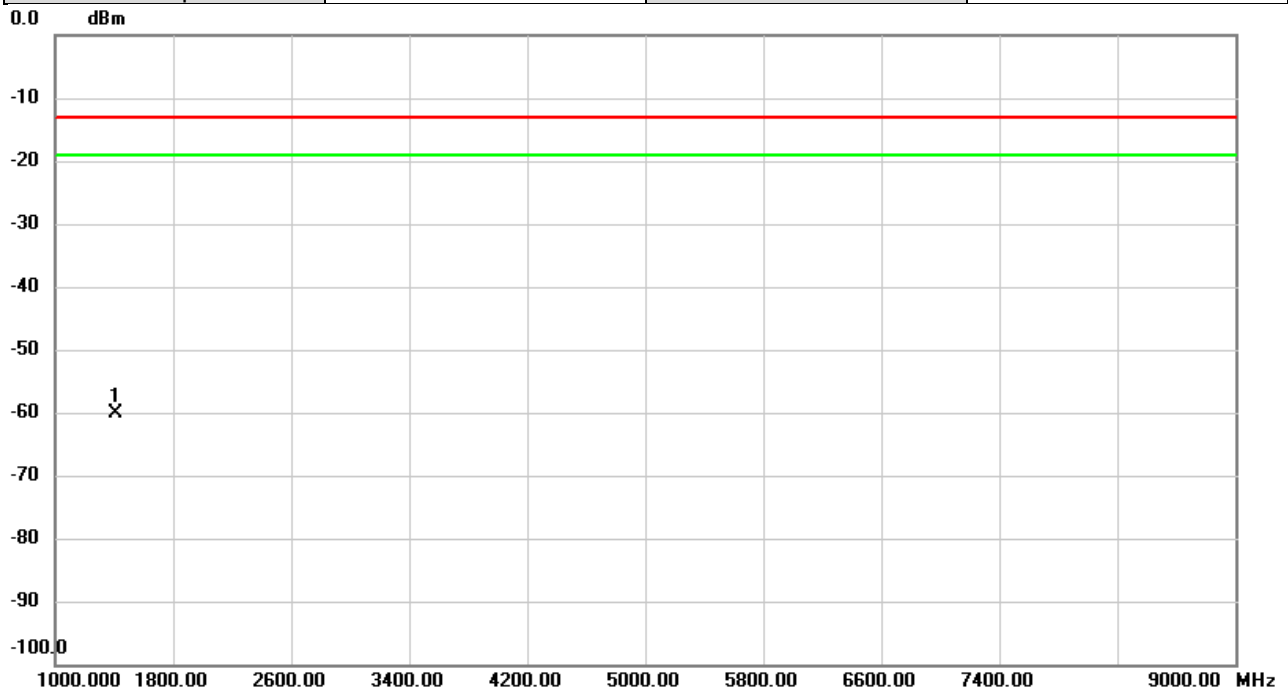


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1408.000	-65.01	4.91	-60.10	-13.00	-47.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23060	Polarization	Horizontal
Temp	26°C	Hum.	54%

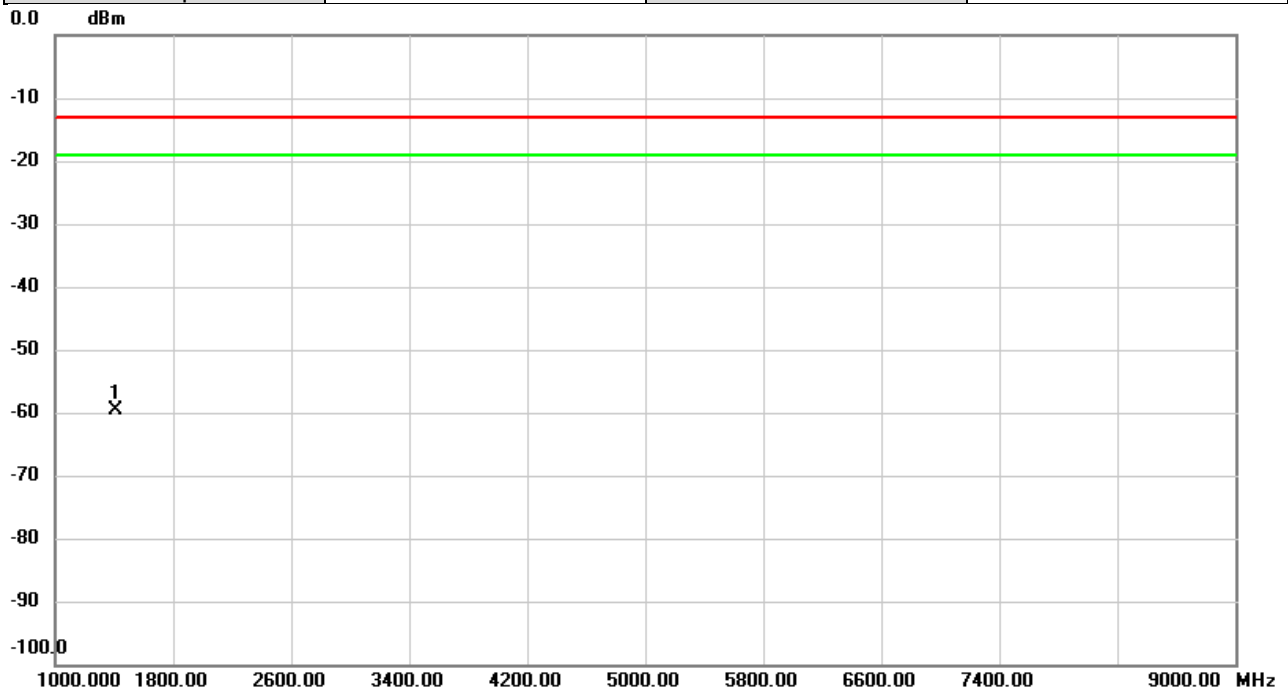


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1408.000	-63.99	4.47	-59.52	-13.00	-46.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23095	Polarization	Vertical
Temp	26°C	Hum.	54%

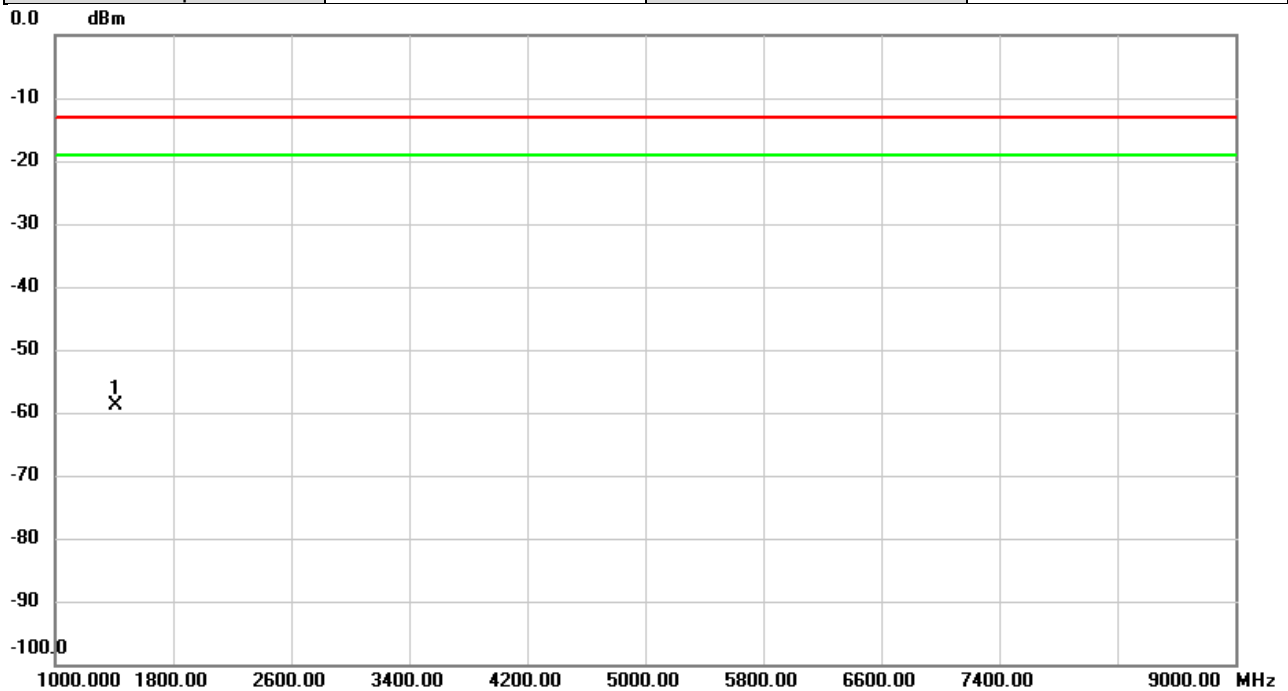


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1415.000	-63.76	4.88	-58.88	-13.00	-45.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23095	Polarization	Horizontal
Temp	26°C	Hum.	54%

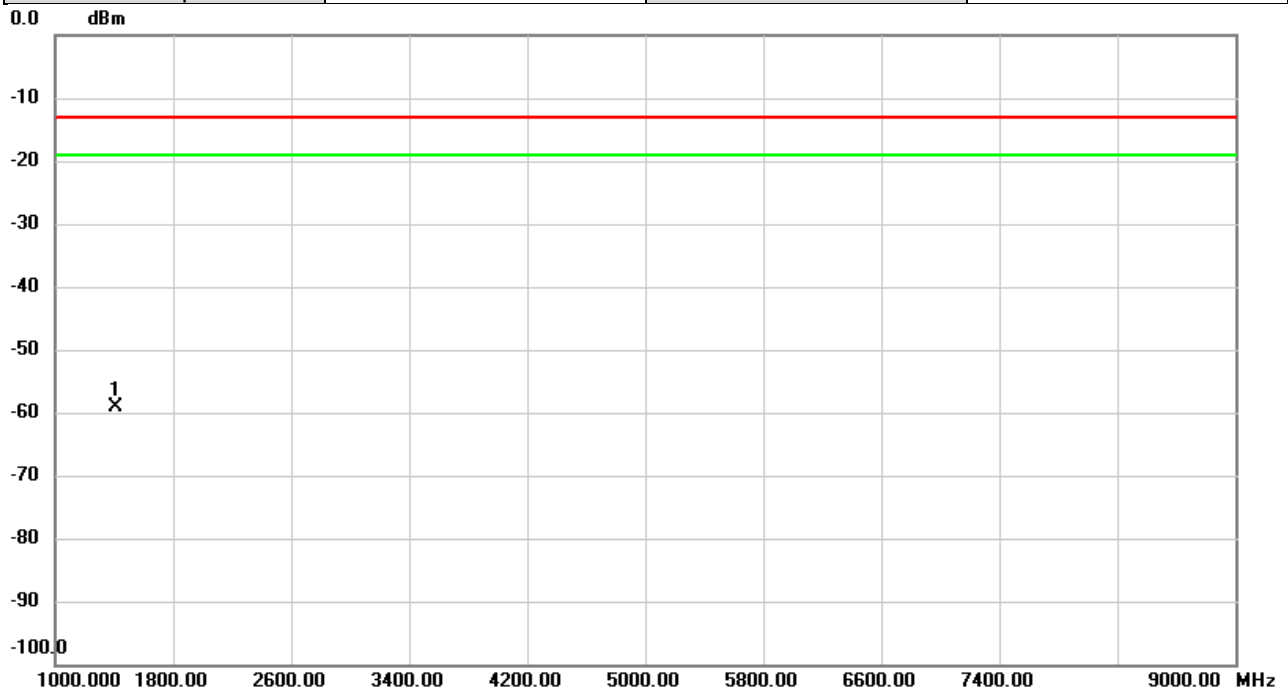


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1415.000	-63.63	4.44	-59.19	-13.00	-46.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23130	Polarization	Vertical
Temp	26°C	Hum.	54%

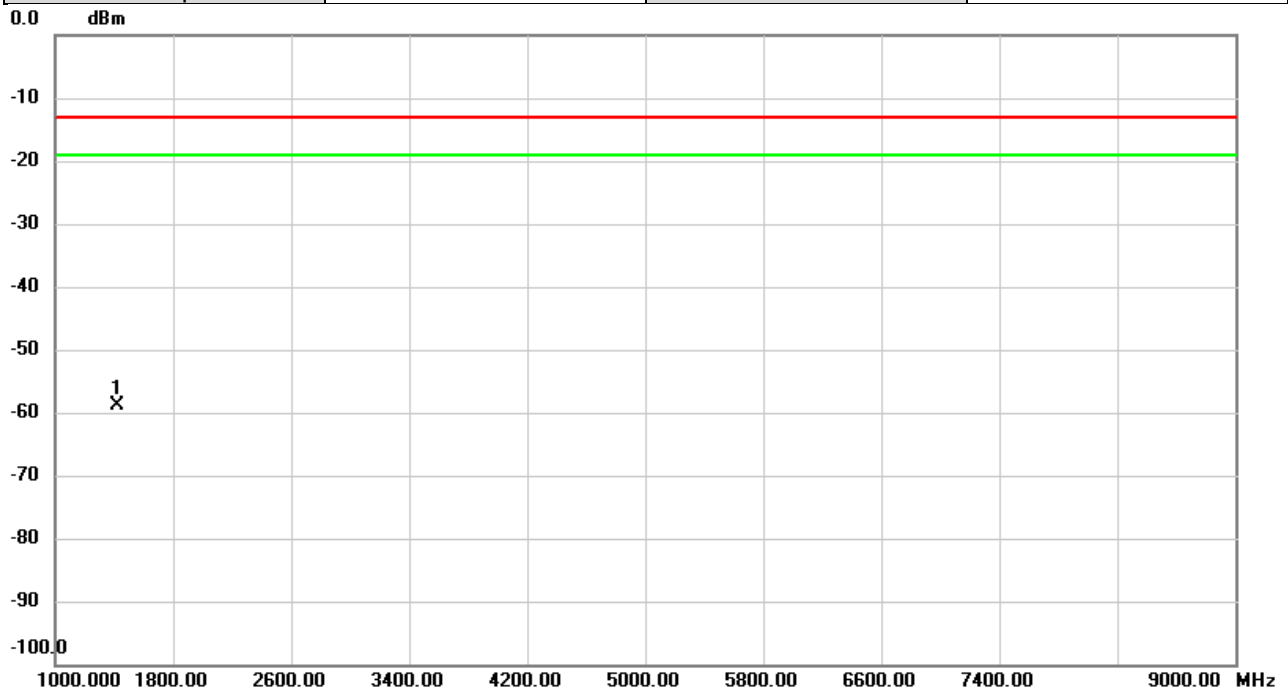


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1422.000	-63.66	4.85	-58.81	-13.00	-45.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band 12	Test Date	2025/4/30
Test Channel	CH23130	Polarization	Horizontal
Temp	26°C	Hum.	54%

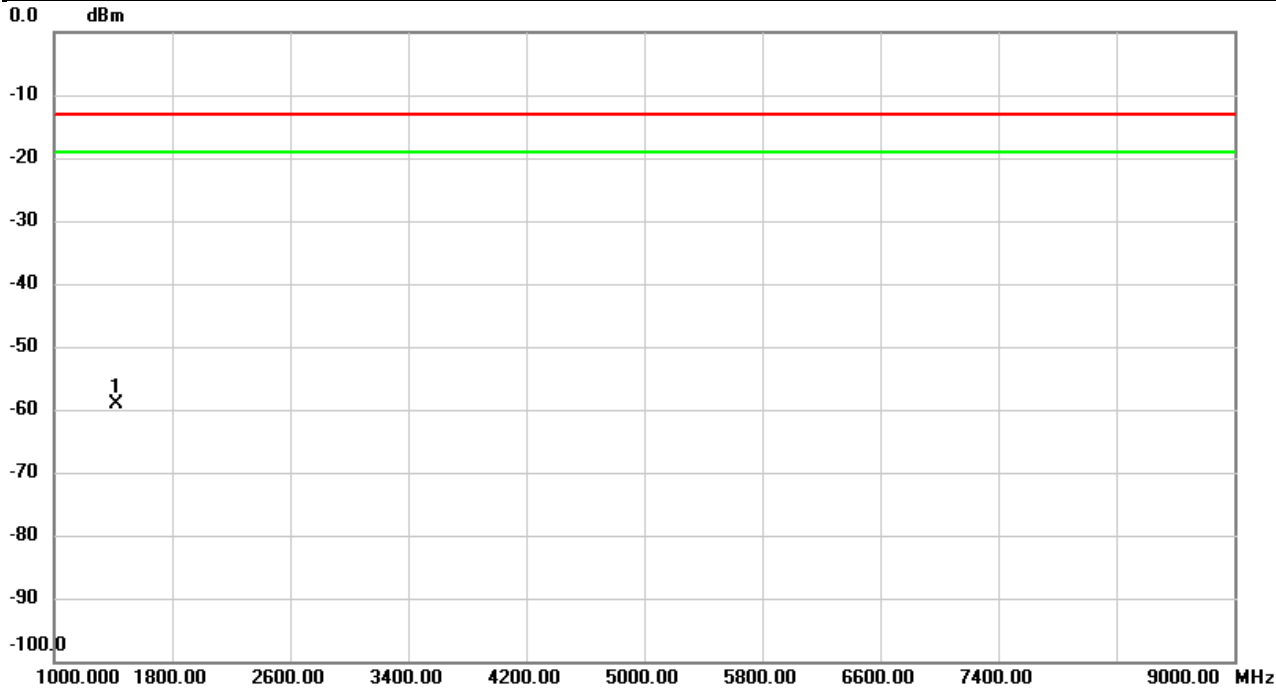

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1422.000	-63.43	4.42	-59.01	-13.00	-46.01	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 13	Test Date	2025/5/2
Test Channel	CH23230	Polarization	Vertical
Temp	27°C	Hum.	61%

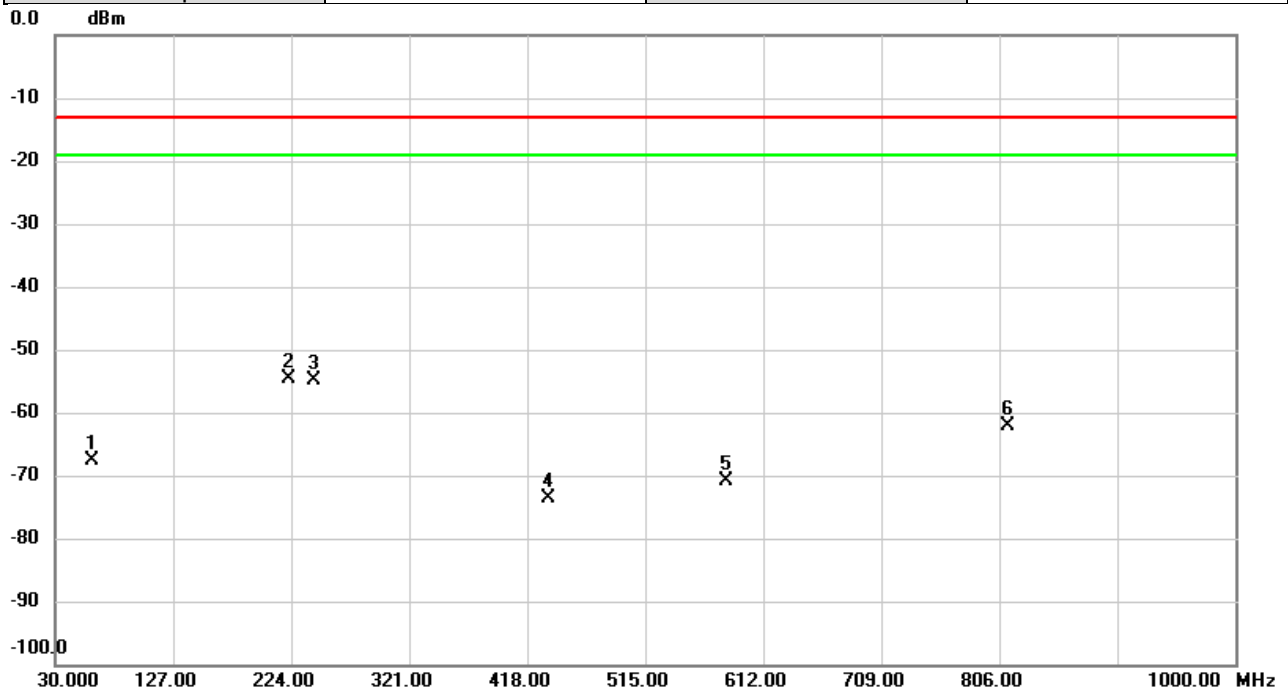


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		60.1023	-59.90	-7.76	-67.66	-13.00	-54.66	peak	
2	*	222.1893	-51.04	-3.64	-54.68	-13.00	-41.68	peak	
3		243.2060	-52.39	-2.57	-54.96	-13.00	-41.96	peak	
4		435.5570	-72.02	-1.58	-73.60	-13.00	-60.60	peak	
5		582.1240	-73.96	3.11	-70.85	-13.00	-57.85	peak	
6		812.8222	-66.25	4.16	-62.09	-13.00	-49.09	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 13	Test Date	2025/5/2
Test Channel	CH23230	Polarization	Horizontal
Temp	27°C	Hum.	61%

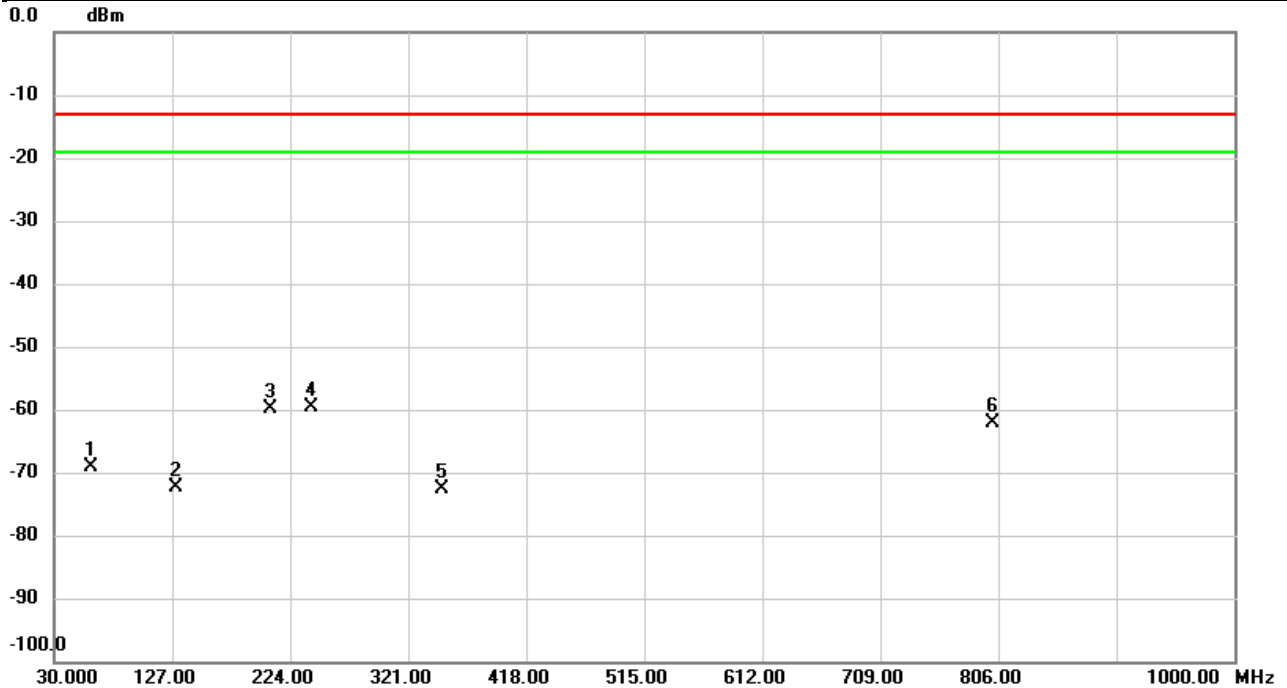


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.9083	-64.98	-4.07	-69.05	-13.00	-56.05	peak	
2		130.7182	-65.86	-6.51	-72.37	-13.00	-59.37	peak	
3		207.3483	-50.44	-9.53	-59.97	-13.00	-46.97	peak	
4	*	241.8480	-51.49	-8.20	-59.69	-13.00	-46.69	peak	
5		349.1300	-69.91	-2.61	-72.52	-13.00	-59.52	peak	
6		801.8613	-66.16	4.03	-62.13	-13.00	-49.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 13	Test Date	2025/4/30
Test Channel	CH23230	Polarization	Vertical
Temp	26°C	Hum.	54%

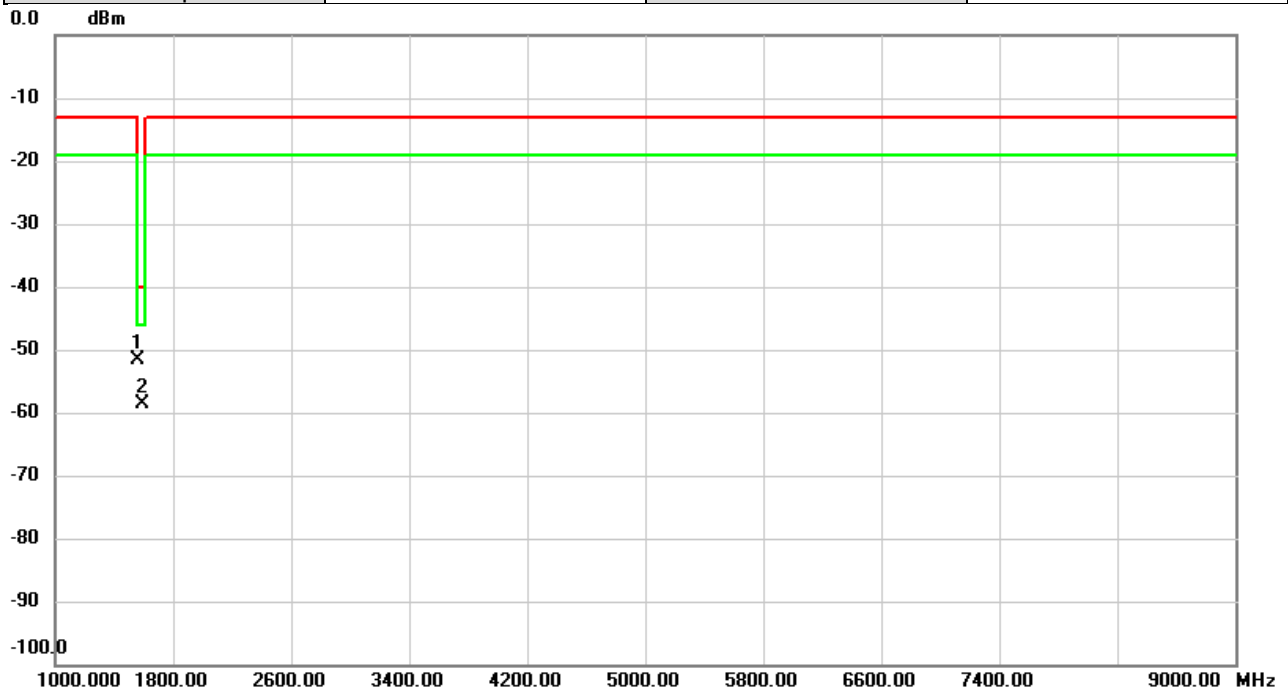


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.200	-56.30	4.57	-51.73	-13.00	-38.73	peak	
2	*	1589.600	-63.47	4.84	-58.63	-40.00	-18.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 13	Test Date	2025/4/30
Test Channel	CH23230	Polarization	Horizontal
Temp	26°C	Hum.	54%

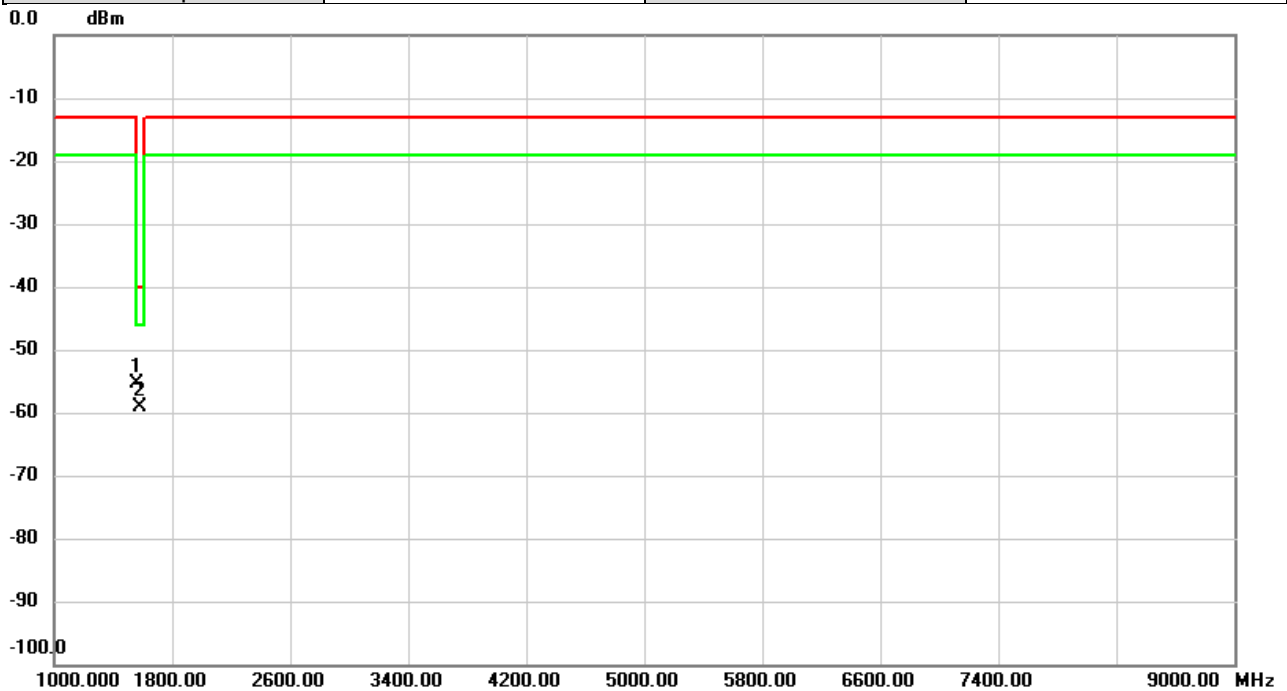


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.200	-59.84	4.40	-55.44	-13.00	-42.44	peak	
2	*	1581.333	-63.83	4.66	-59.17	-40.00	-19.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/5/2
Test Channel	CH23800	Polarization	Vertical
Temp	27°C	Hum.	61%

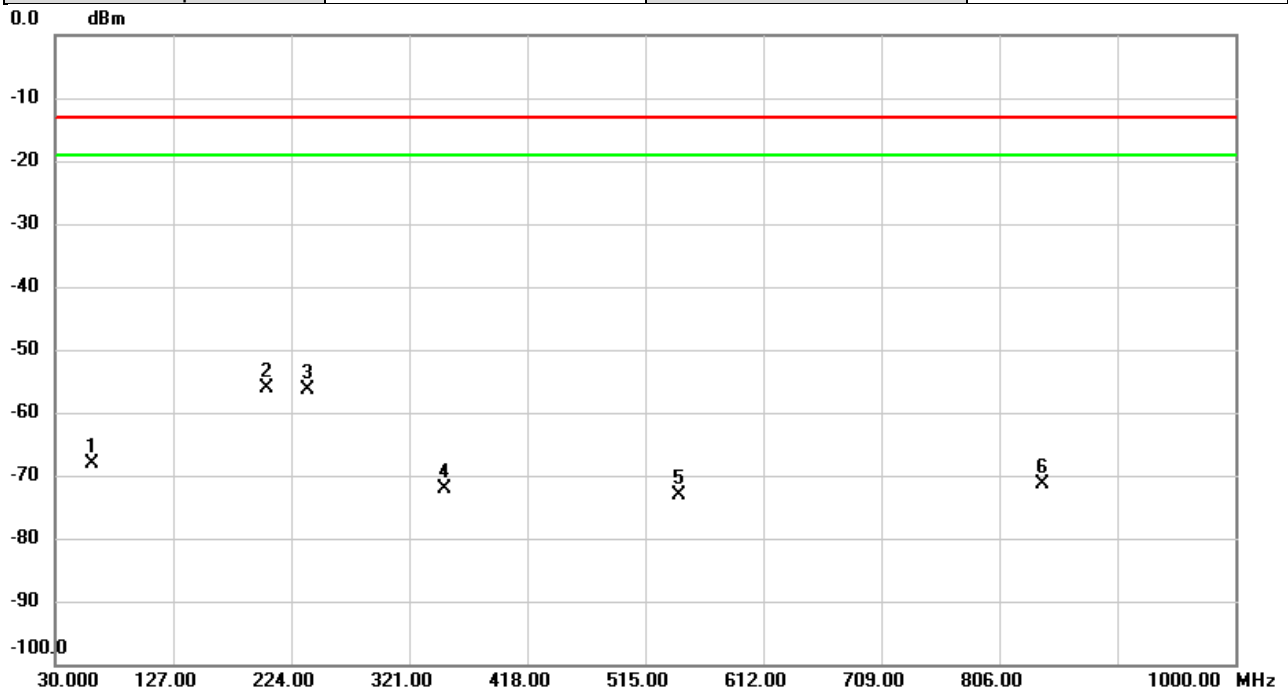


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.8760	-60.40	-7.75	-68.15	-13.00	-55.15	peak	
2	*	203.4037	-52.74	-3.39	-56.13	-13.00	-43.13	peak	
3		236.9657	-53.96	-2.52	-56.48	-13.00	-43.48	peak	
4		349.5503	-69.12	-2.89	-72.01	-13.00	-59.01	peak	
5		543.0007	-75.49	2.44	-73.05	-13.00	-60.05	peak	
6		841.7283	-76.28	4.88	-71.40	-13.00	-58.40	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/5/2
Test Channel	CH23800	Polarization	Horizontal
Temp	27°C	Hum.	61%

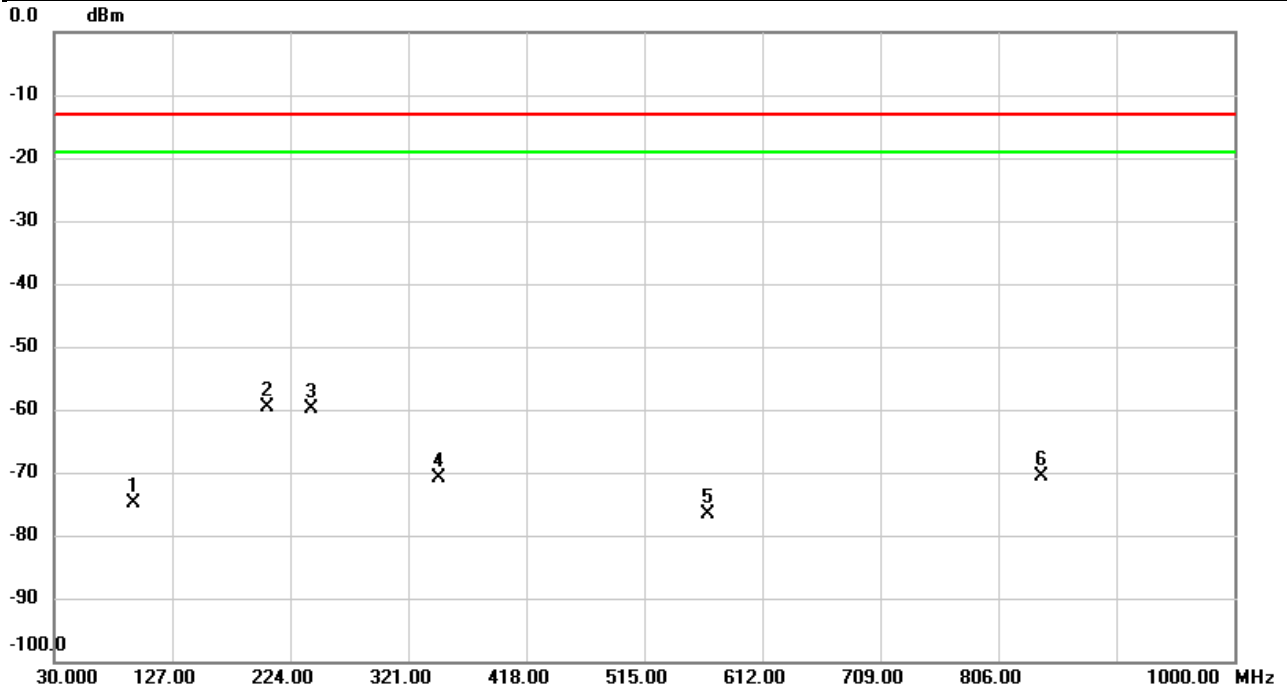


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		95.2163	-66.84	-8.15	-74.99	-13.00	-61.99	peak	
2	*	204.9233	-50.04	-9.56	-59.60	-13.00	-46.60	peak	
3		241.3630	-51.70	-8.21	-59.91	-13.00	-46.91	peak	
4		346.2523	-68.01	-2.82	-70.83	-13.00	-57.83	peak	
5		567.5417	-76.39	-0.30	-76.69	-13.00	-63.69	peak	
6		841.1140	-74.84	4.10	-70.74	-13.00	-57.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23780	Polarization	Vertical
Temp	26°C	Hum.	54%

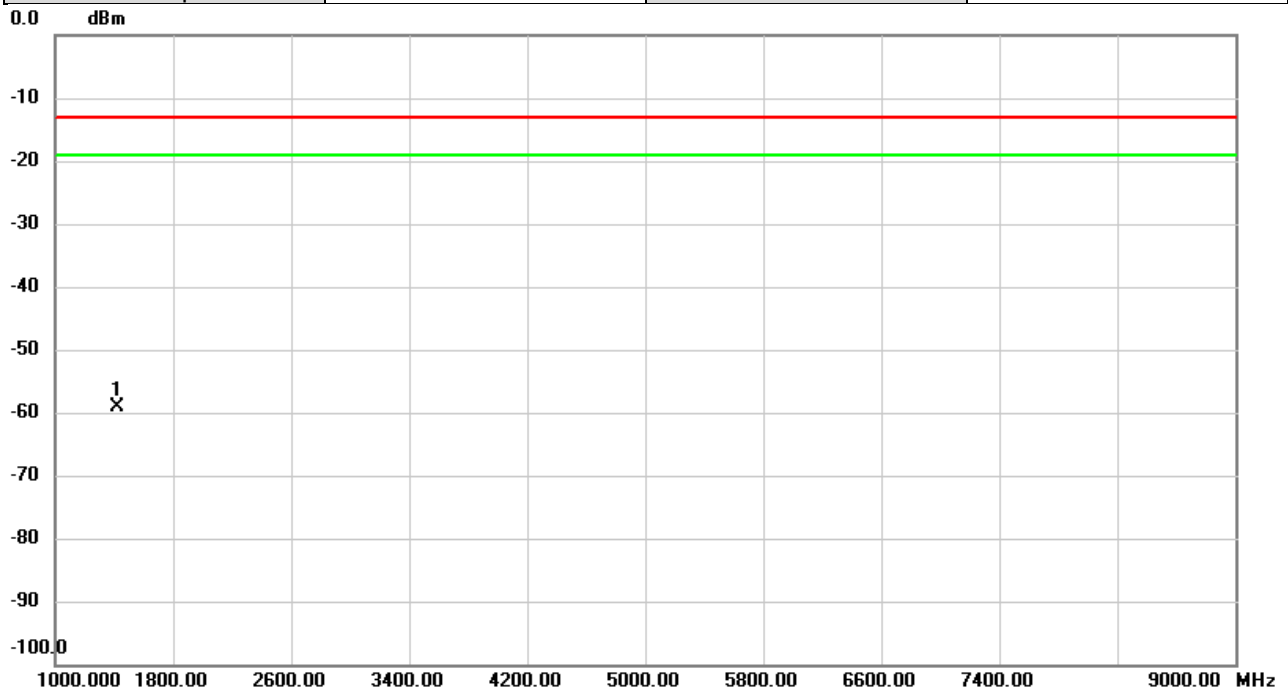


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1418.000	-64.03	4.86	-59.17	-13.00	-46.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23780	Polarization	Horizontal
Temp	26°C	Hum.	54%

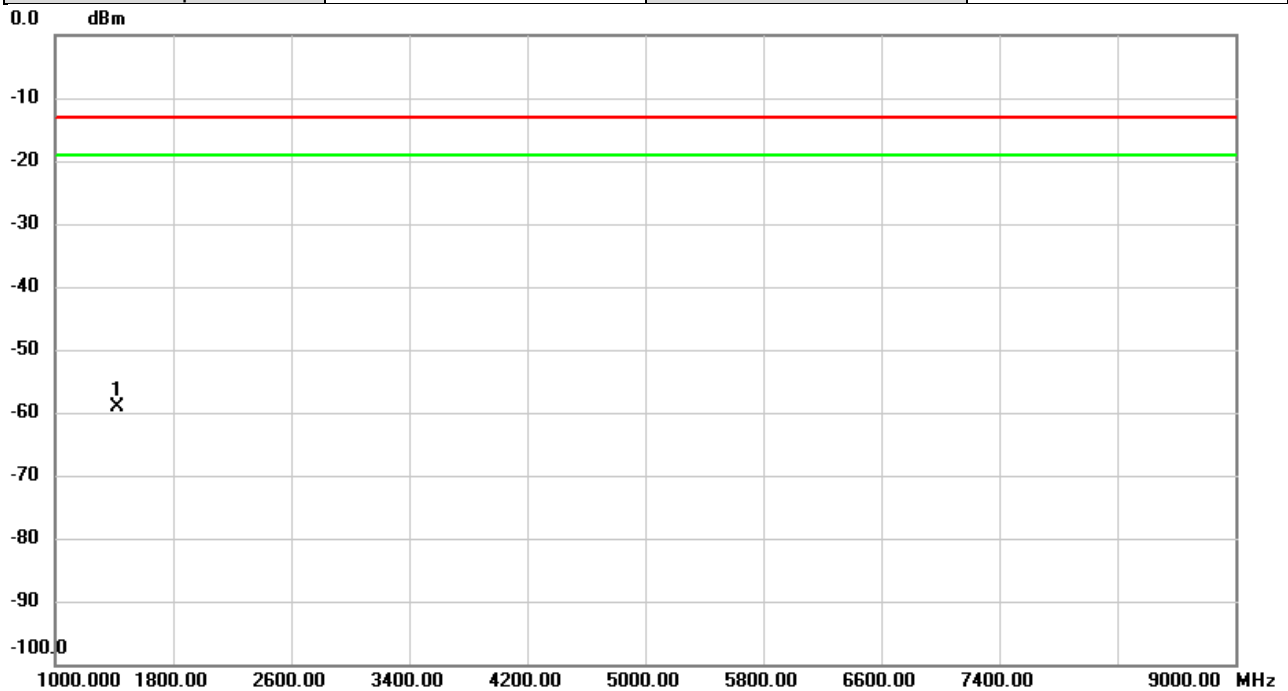


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1418.000	-63.66	4.43	-59.23	-13.00	-46.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23790	Polarization	Vertical
Temp	26°C	Hum.	54%

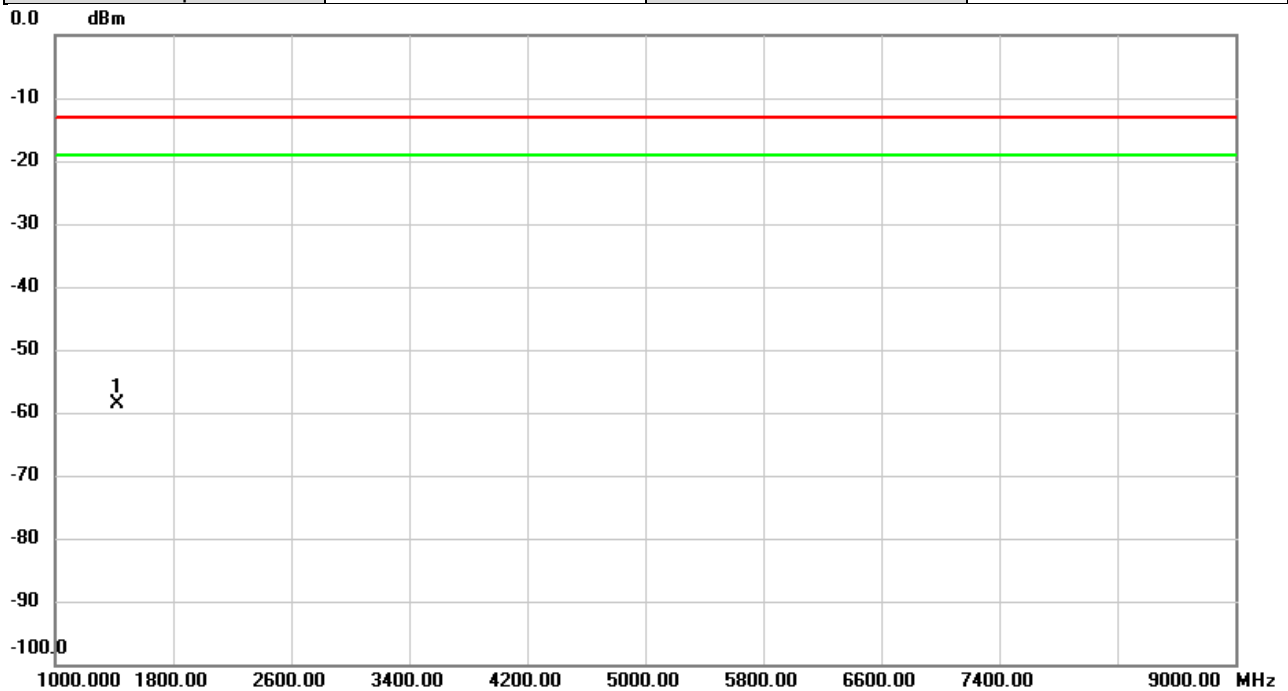


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1420.000	-63.53	4.86	-58.67	-13.00	-45.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23790	Polarization	Horizontal
Temp	26°C	Hum.	54%

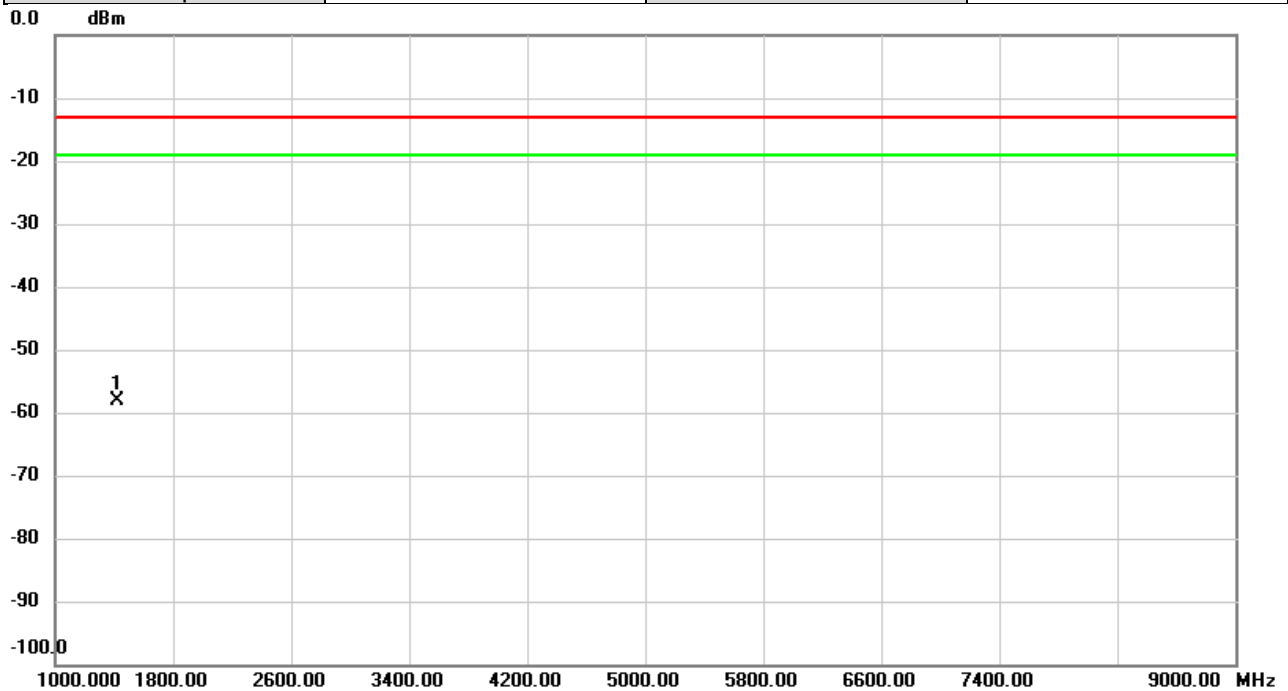


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1420.000	-62.57	4.42	-58.15	-13.00	-45.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23800	Polarization	Vertical
Temp	26°C	Hum.	54%

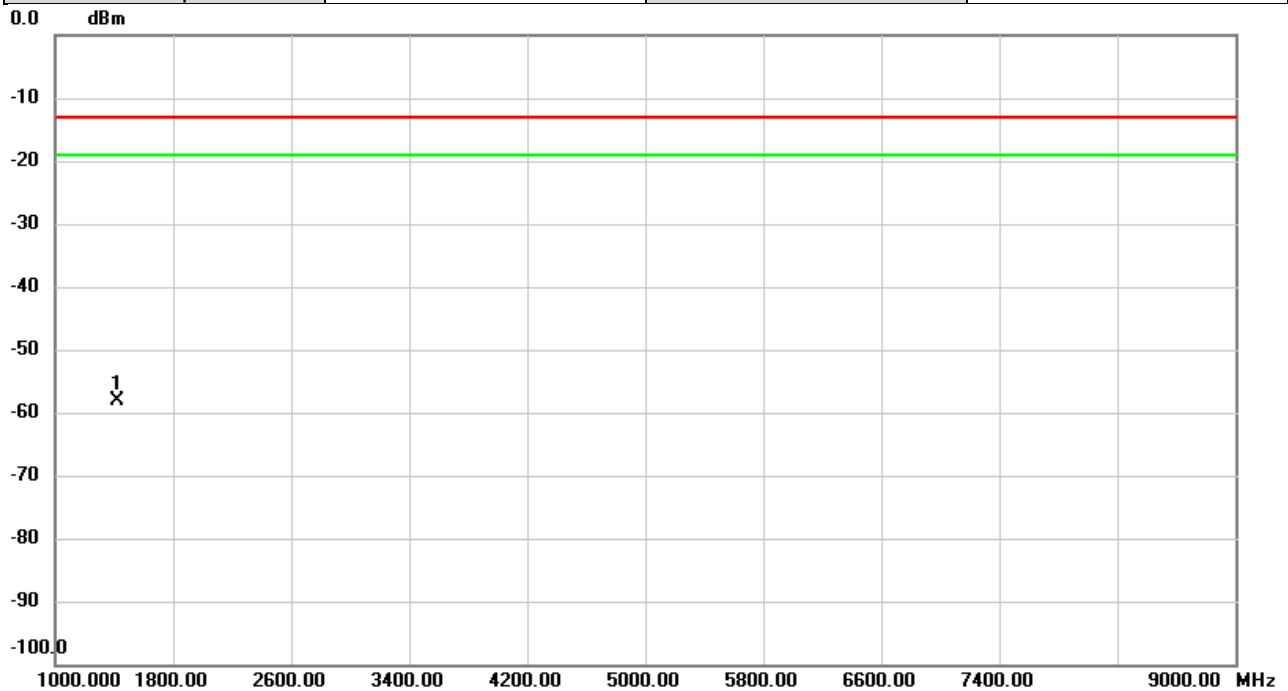


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1422.000	-62.89	4.85	-58.04	-13.00	-45.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 17	Test Date	2025/4/30
Test Channel	CH23800	Polarization	Horizontal
Temp	26°C	Hum.	54%

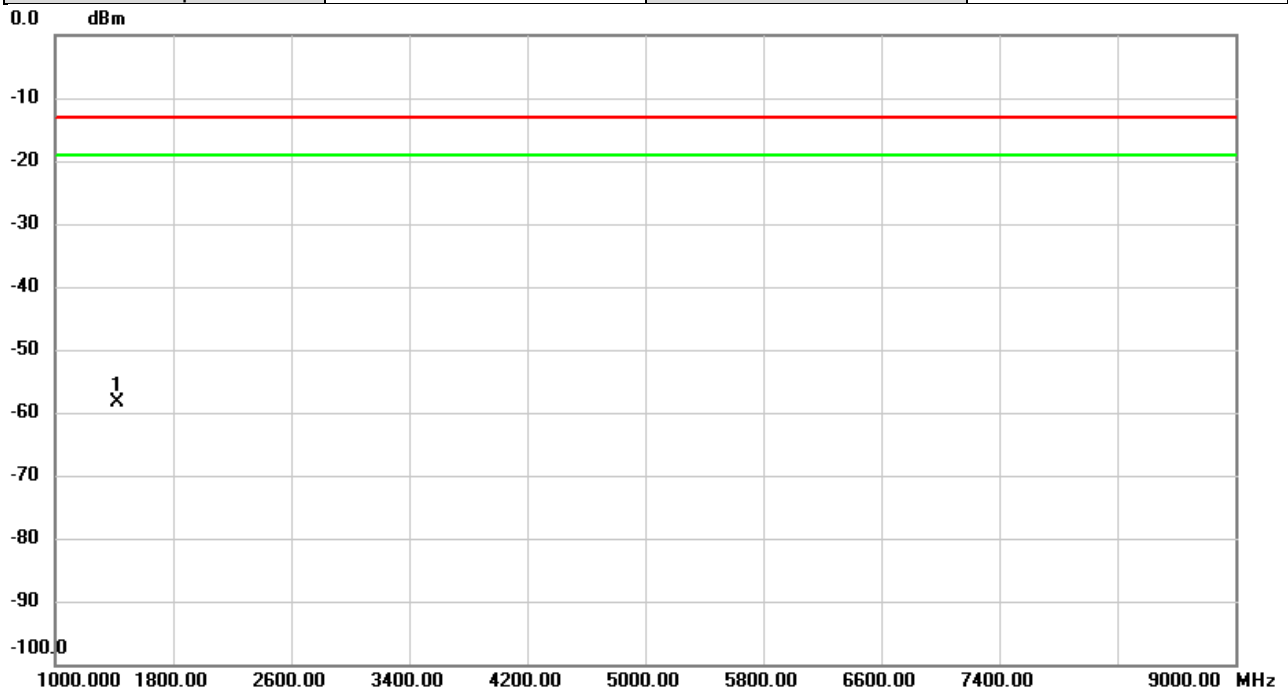


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1422.000	-62.90	4.42	-58.48	-13.00	-45.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/5/2
Test Channel	CH27710	Polarization	Vertical
Temp	27°C	Hum.	61%

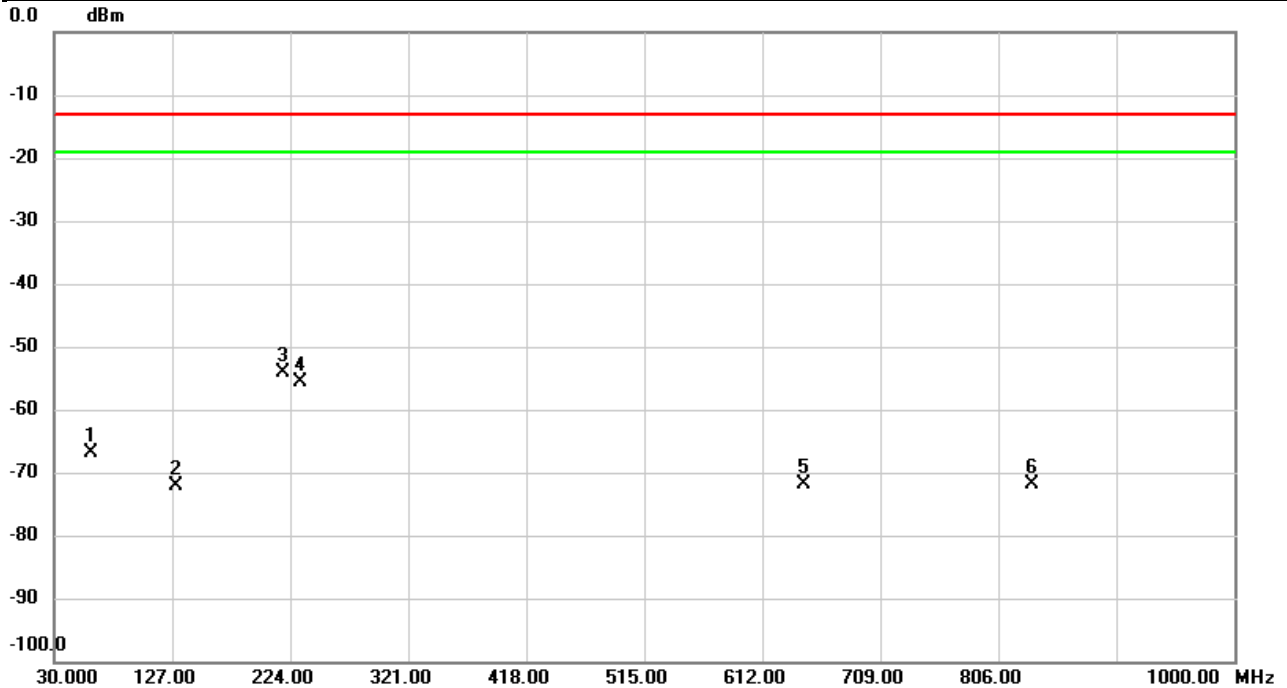


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.9407	-59.03	-7.76	-66.79	-13.00	-53.79	peak	
2		130.7830	-66.83	-5.40	-72.23	-13.00	-59.23	peak	
3	*	218.0507	-50.26	-3.78	-54.04	-13.00	-41.04	peak	
4		232.9563	-52.93	-2.68	-55.61	-13.00	-42.61	peak	
5		646.6937	-75.05	3.29	-71.76	-13.00	-58.76	peak	
6		834.2592	-76.55	4.70	-71.85	-13.00	-58.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/5/2
Test Channel	CH27710	Polarization	Horizontal
Temp	27°C	Hum.	61%

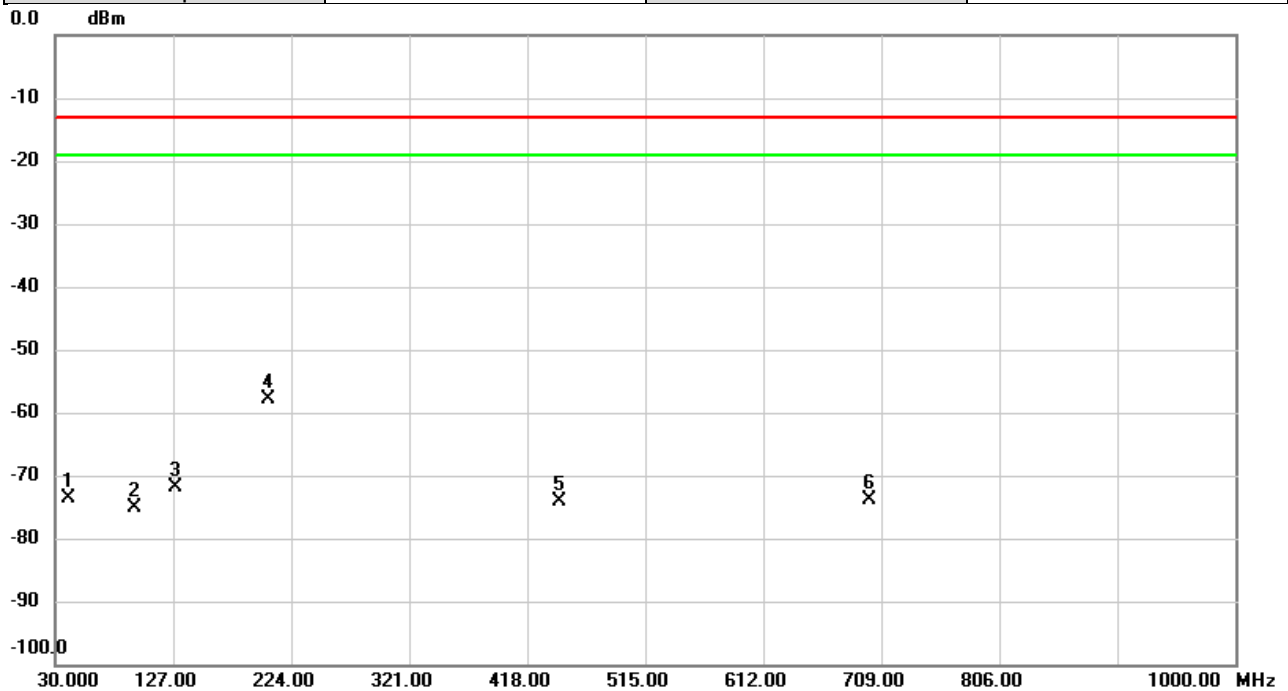


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		41.3167	-75.37	1.76	-73.61	-13.00	-60.61	peak	
2		95.5397	-66.87	-8.14	-75.01	-13.00	-62.01	peak	
3		129.2957	-65.17	-6.63	-71.80	-13.00	-58.80	peak	
4	*	204.8587	-48.22	-9.56	-57.78	-13.00	-44.78	peak	
5		444.1577	-72.02	-1.98	-74.00	-13.00	-61.00	peak	
6		699.6880	-76.37	2.57	-73.80	-13.00	-60.80	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/4/29
Test Channel	CH27710	Polarization	Vertical
Temp	25°C	Hum.	59%

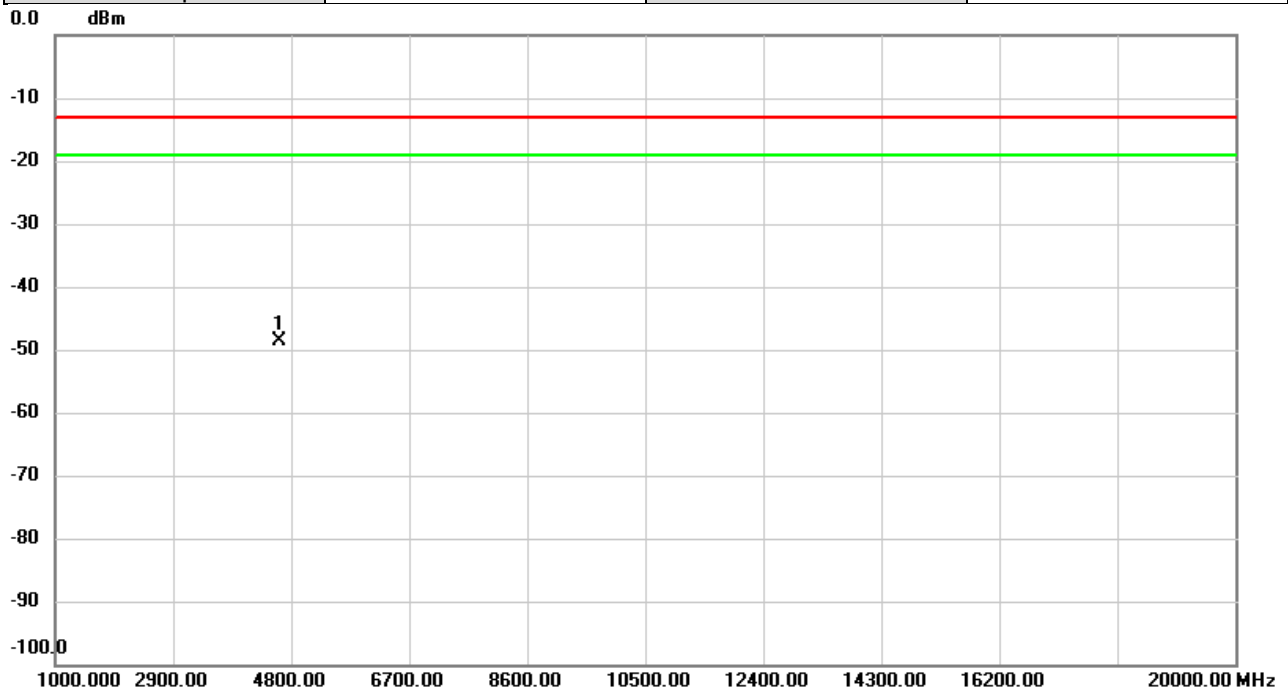


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4602.000	-62.02	13.35	-48.67	-13.00	-35.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/4/29
Test Channel	CH27710	Polarization	Horizontal
Temp	25°C	Hum.	59%

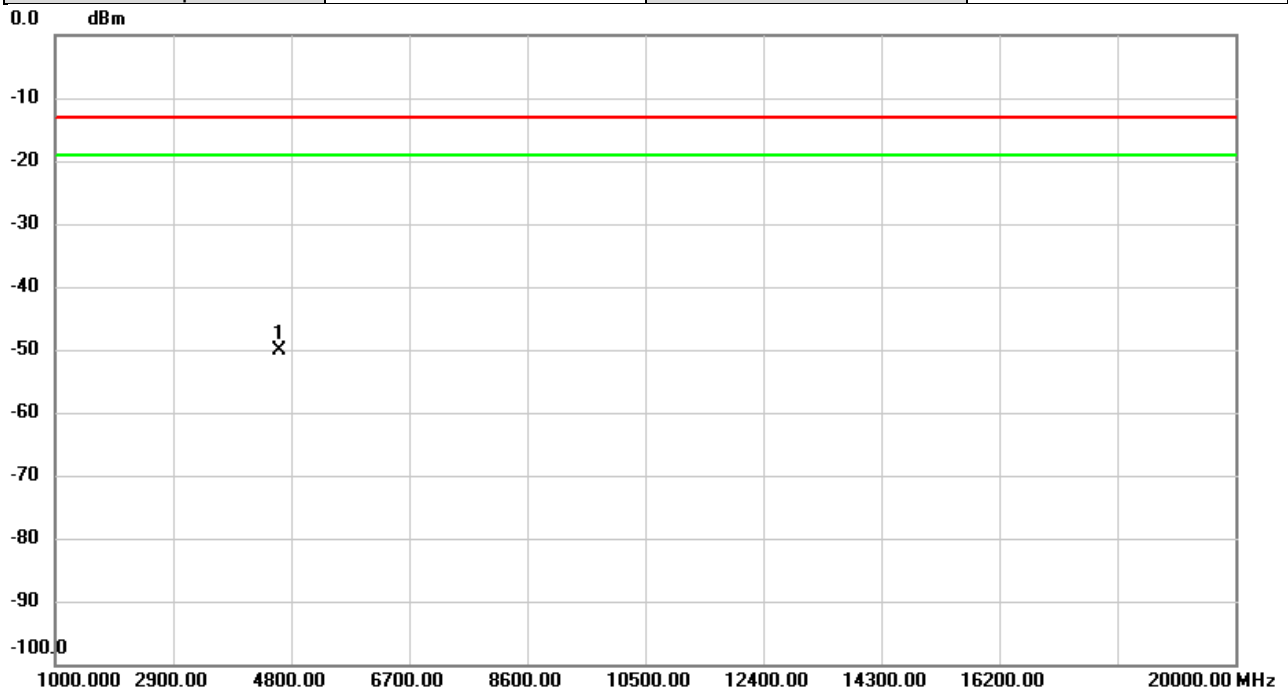


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	4602.000	-63.15	13.13	-50.02	-13.00	-37.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/5/2
Test Channel	CH27710	Polarization	Vertical
Temp	27°C	Hum.	61%

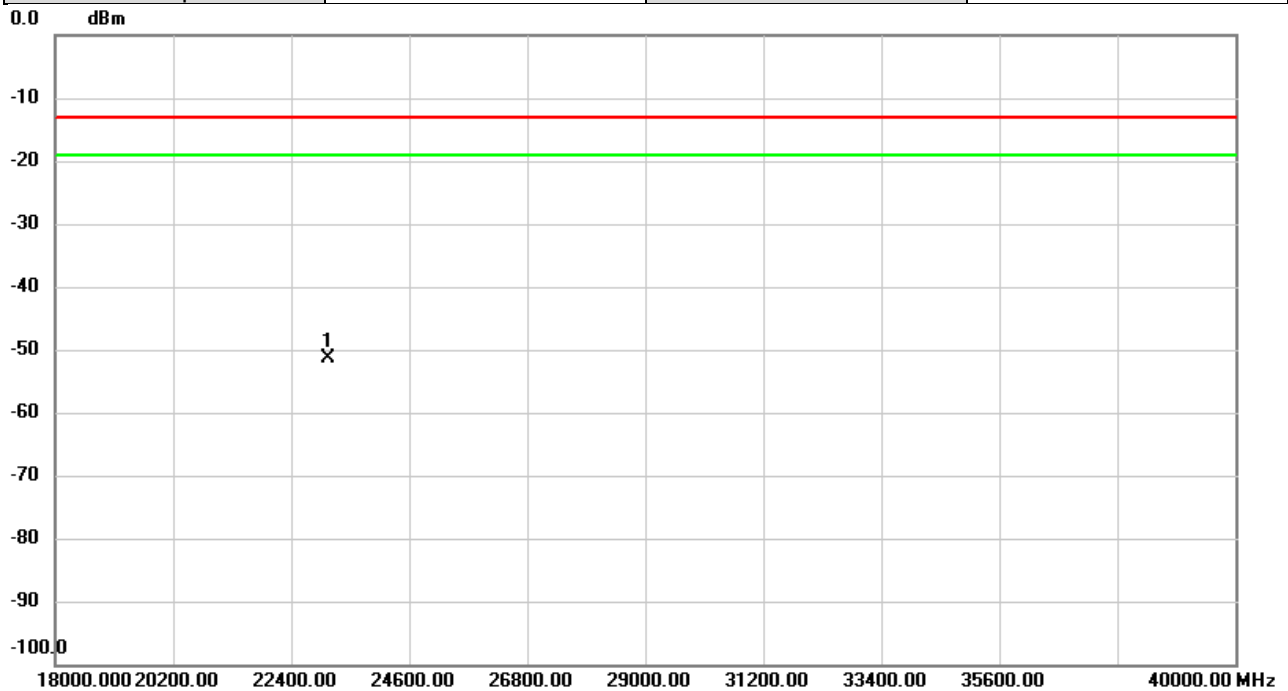


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	23100.00	-55.42	4.09	-51.33	-13.00	-38.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 30	Test Date	2025/5/2
Test Channel	CH27710	Polarization	Horizontal
Temp	27°C	Hum.	61%

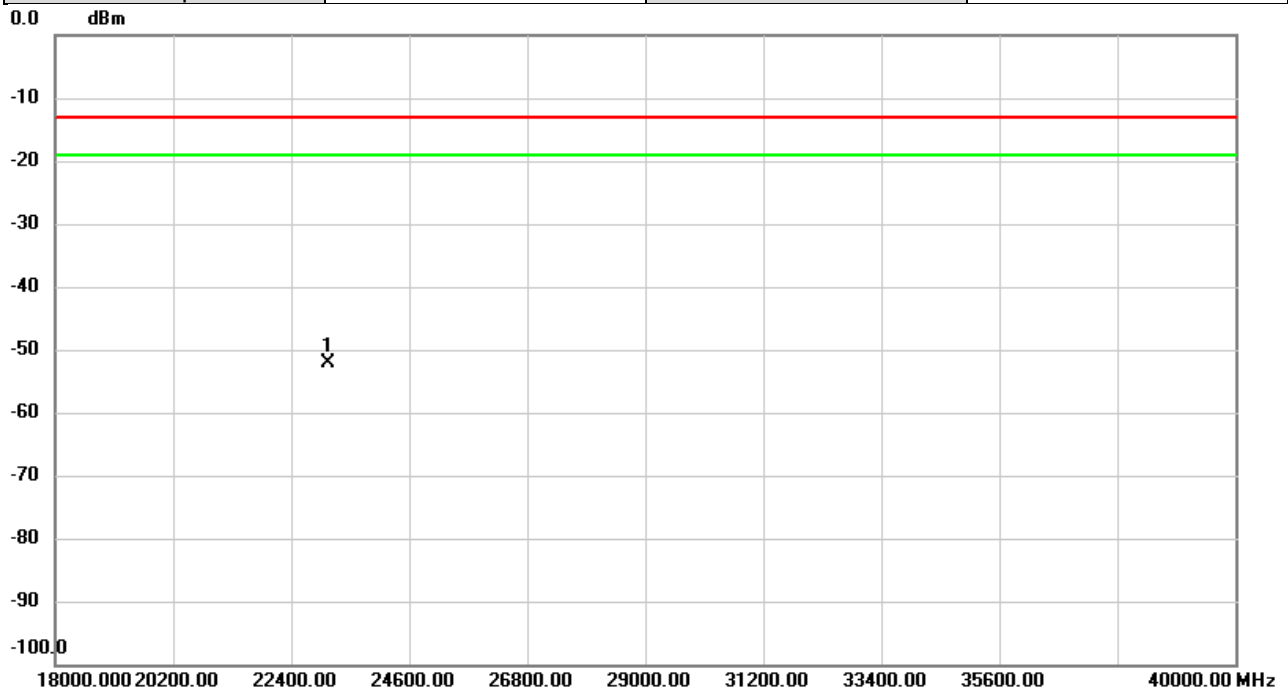


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	23100.00	-55.30	3.07	-52.23	-13.00	-39.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/5/2
Test Channel	CH37850	Polarization	Vertical
Temp	27°C	Hum.	61%

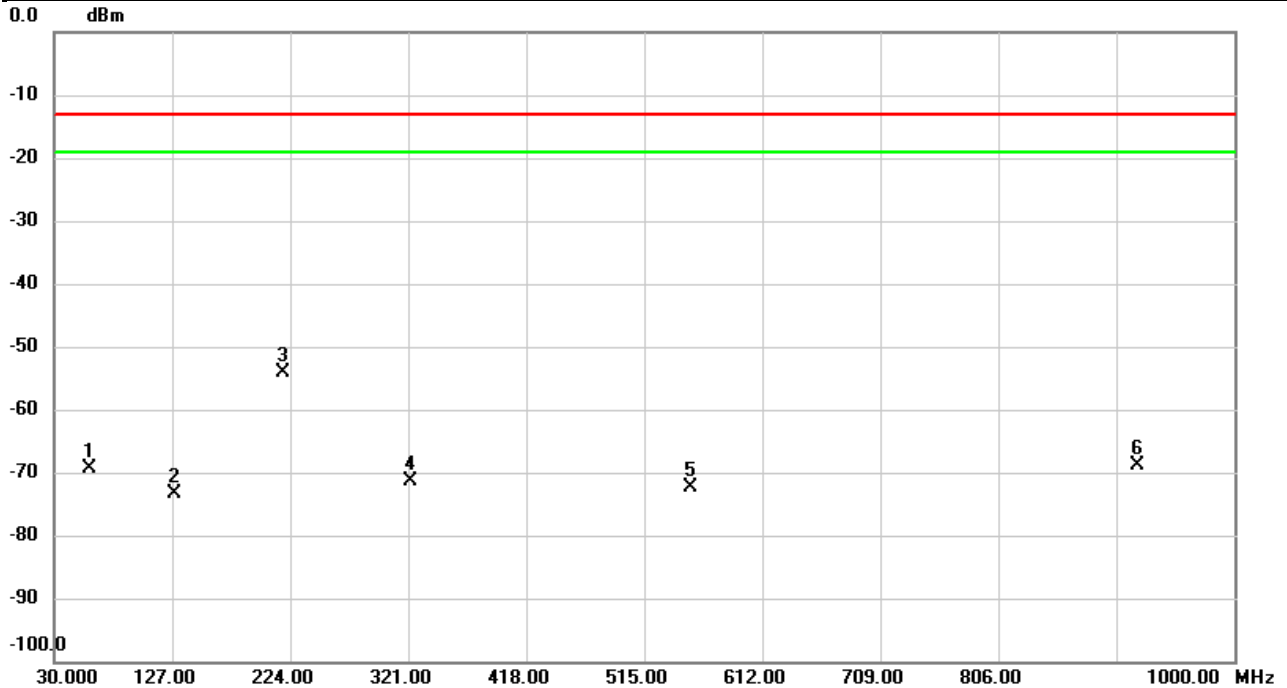


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.6820	-61.71	-7.72	-69.43	-13.00	-56.43	peak	
2		128.7460	-67.61	-5.78	-73.39	-13.00	-60.39	peak	
3	*	218.7943	-50.32	-3.81	-54.13	-13.00	-41.13	peak	
4		322.6167	-68.21	-3.16	-71.37	-13.00	-58.37	peak	
5		552.9593	-75.27	2.86	-72.41	-13.00	-59.41	peak	
6		920.2660	-75.58	6.76	-68.82	-13.00	-55.82	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/5/2
Test Channel	CH37850	Polarization	Horizontal
Temp	27°C	Hum.	61%

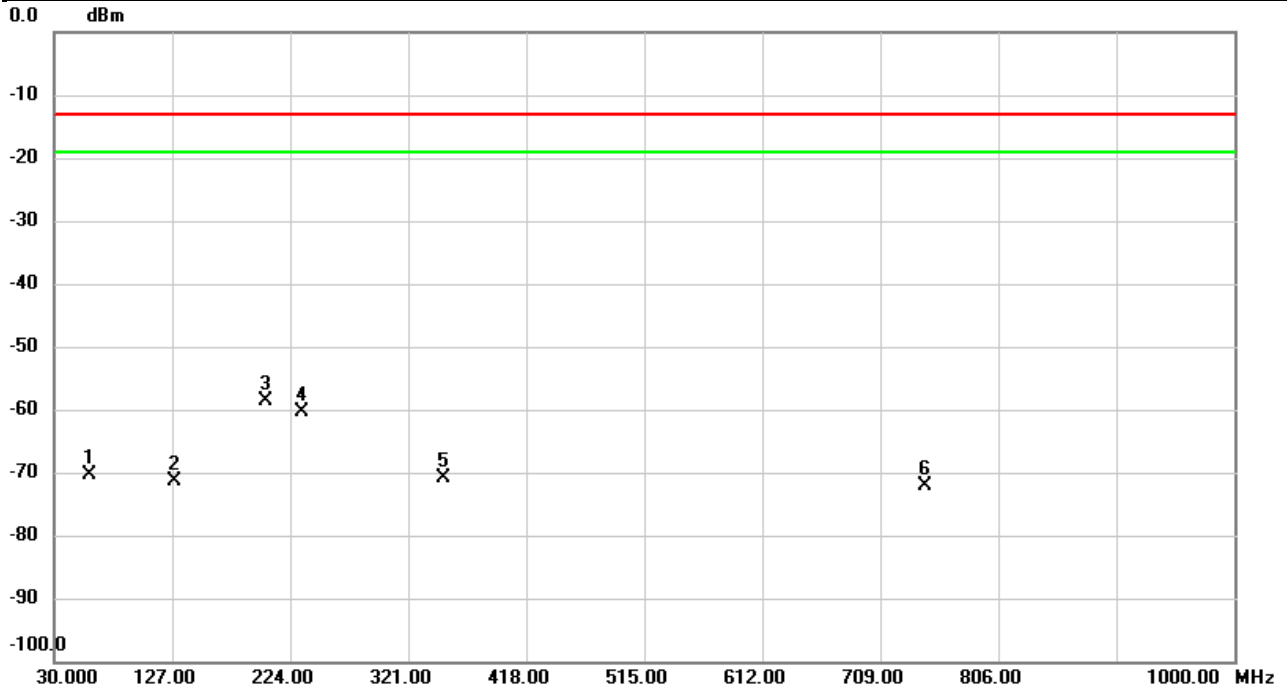


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.4233	-66.44	-3.89	-70.33	-13.00	-57.33	peak	
2		129.4897	-64.83	-6.61	-71.44	-13.00	-58.44	peak	
3	*	203.6623	-48.99	-9.57	-58.56	-13.00	-45.56	peak	
4		233.2150	-52.41	-8.05	-60.46	-13.00	-47.46	peak	
5		349.5503	-68.27	-2.58	-70.85	-13.00	-57.85	peak	
6		745.6982	-75.54	3.44	-72.10	-13.00	-59.10	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH37850	Polarization	Vertical
Temp	25°C	Hum.	59%

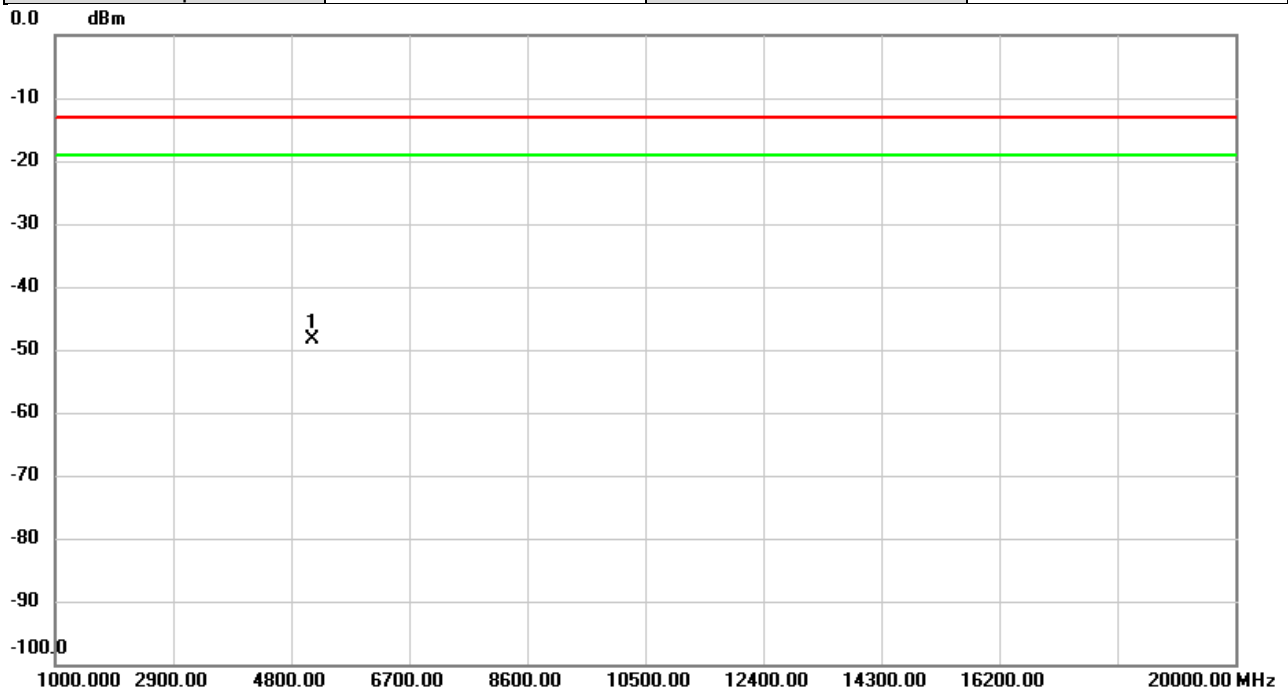


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-62.27	13.89	-48.38	-13.00	-35.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH37850	Polarization	Horizontal
Temp	25°C	Hum.	59%

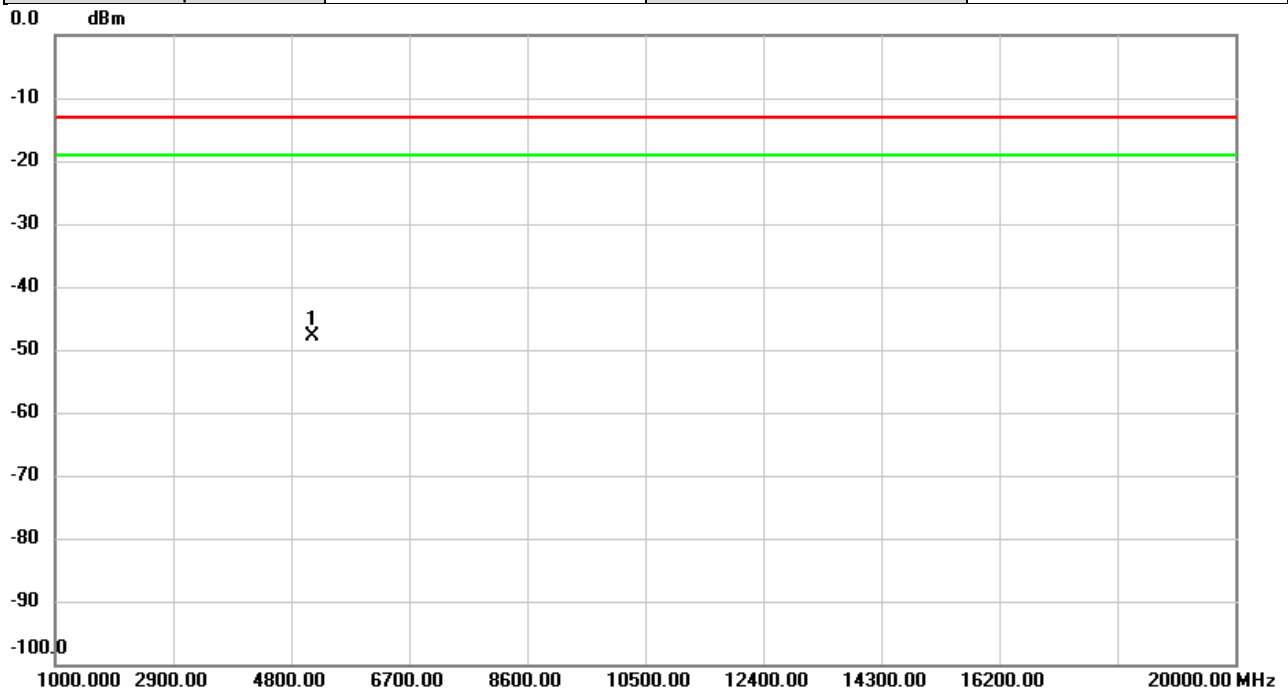


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-61.68	13.89	-47.79	-13.00	-34.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH38000	Polarization	Vertical
Temp	25°C	Hum.	59%

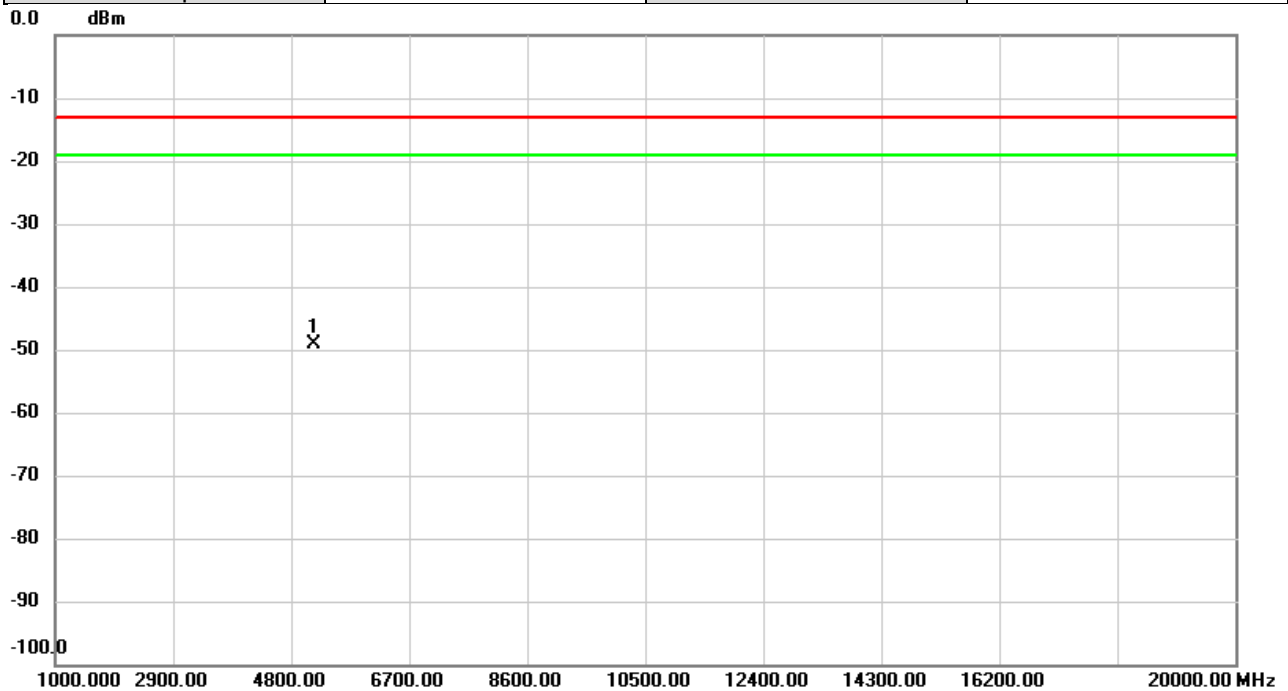


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5172.000	-62.72	13.68	-49.04	-13.00	-36.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH38000	Polarization	Horizontal
Temp	25°C	Hum.	59%

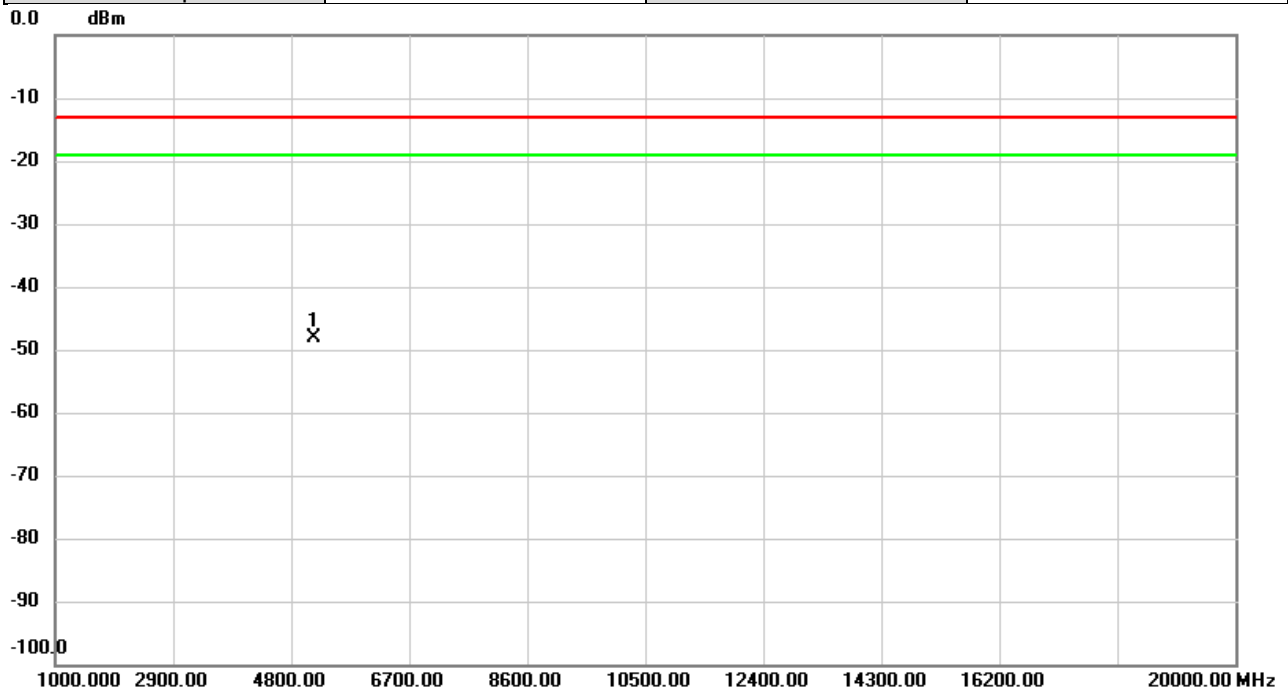


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5172.000	-61.78	13.69	-48.09	-13.00	-35.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH38150	Polarization	Vertical
Temp	25°C	Hum.	59%

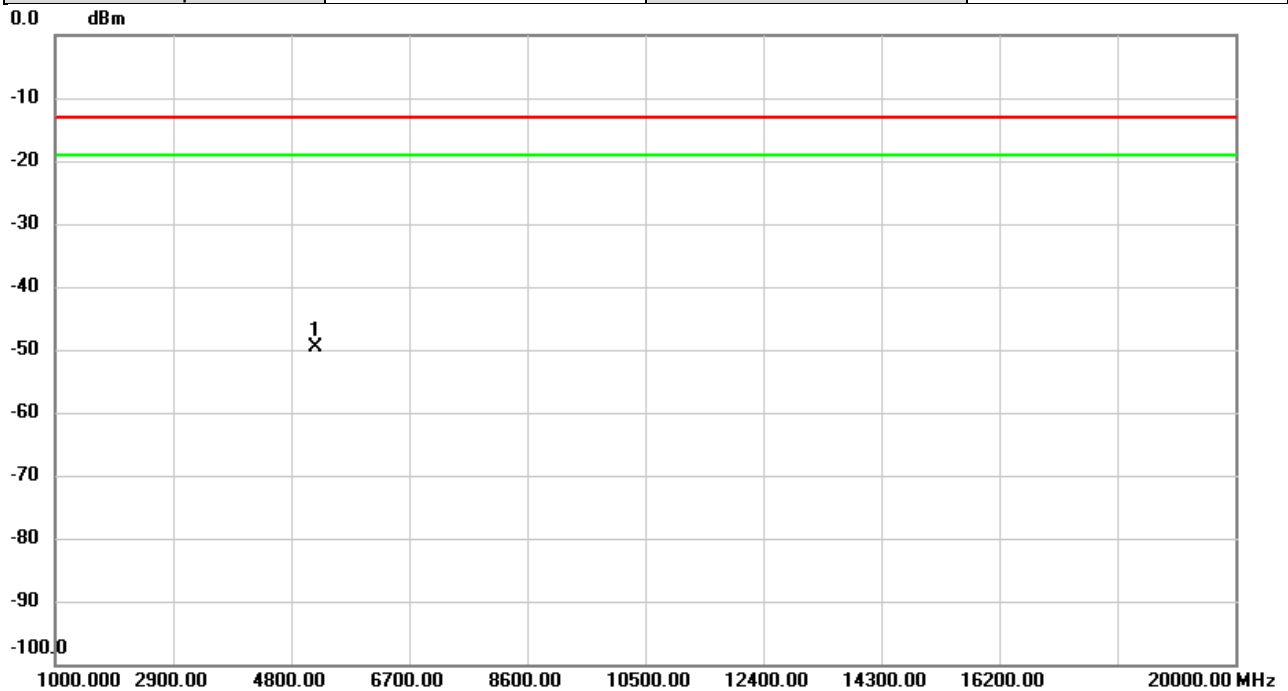


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5202.000	-63.08	13.45	-49.63	-13.00	-36.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band 38	Test Date	2025/4/29
Test Channel	CH38150	Polarization	Horizontal
Temp	25°C	Hum.	59%

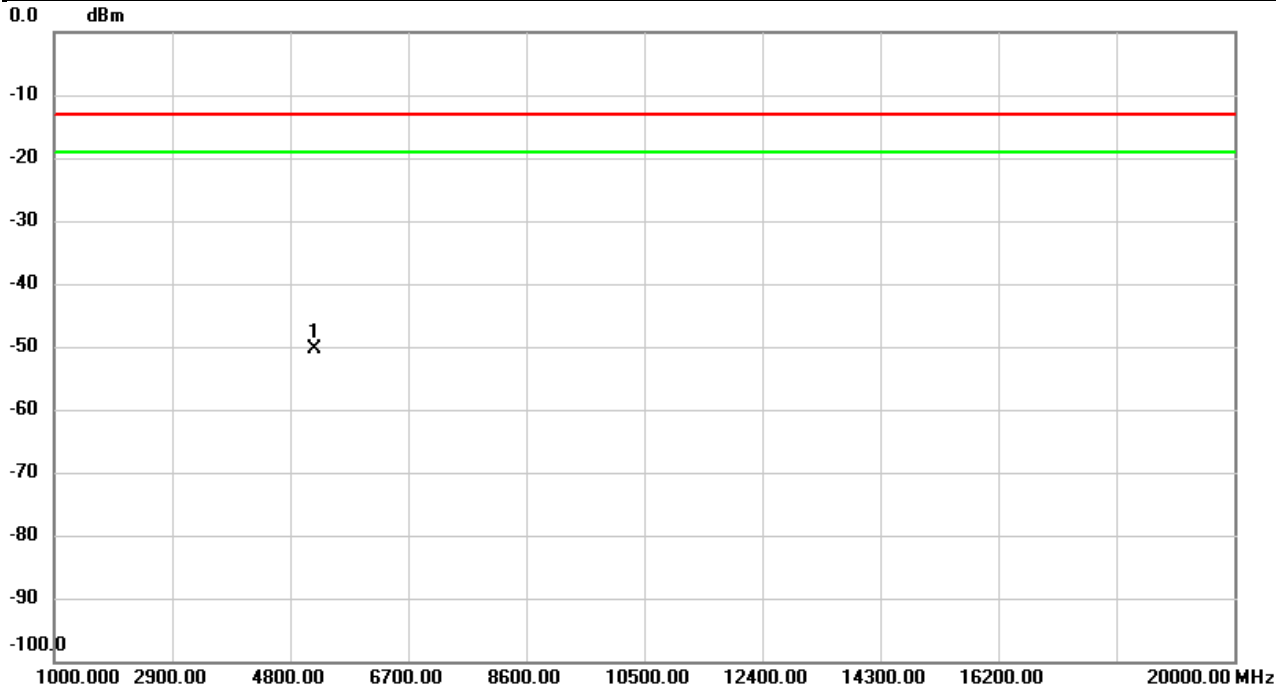

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5202.000	-63.75	13.40	-50.35	-13.00	-37.35	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/5/2
Test Channel	CH37850	Polarization	Vertical
Temp	27°C	Hum.	61%

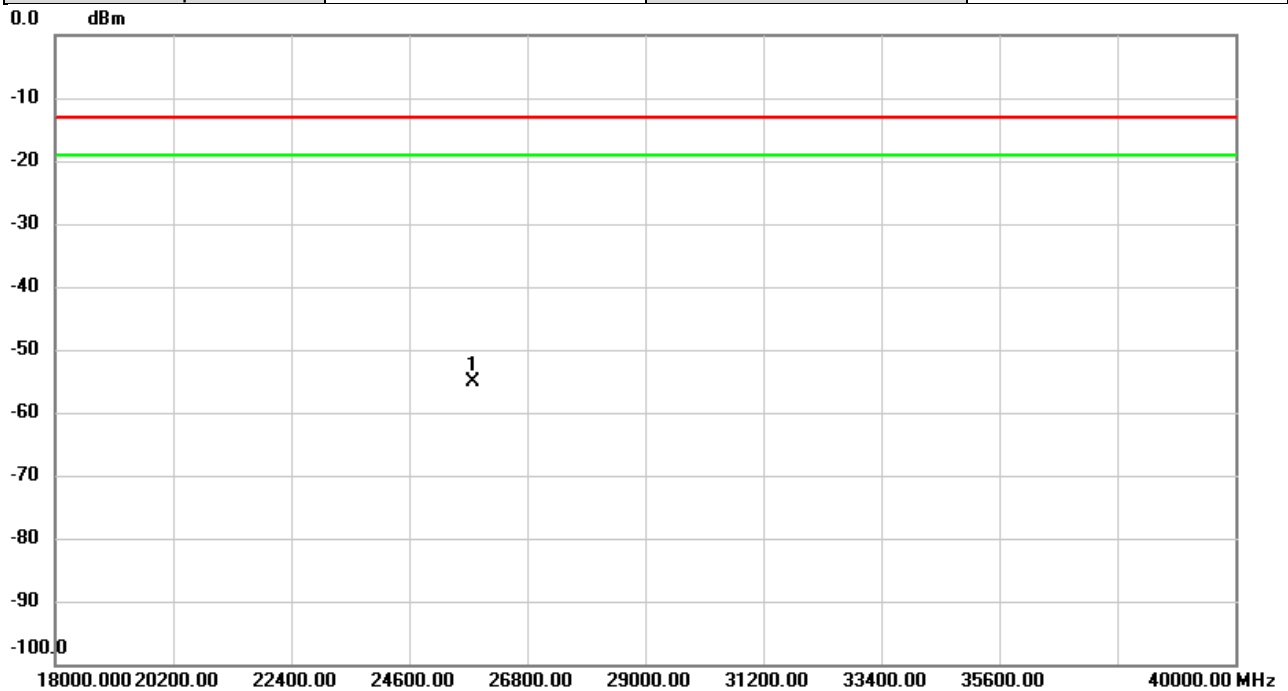


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	25800.00	-57.62	2.57	-55.05	-13.00	-42.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 38	Test Date	2025/5/2
Test Channel	CH37850	Polarization	Horizontal
Temp	27°C	Hum.	61%

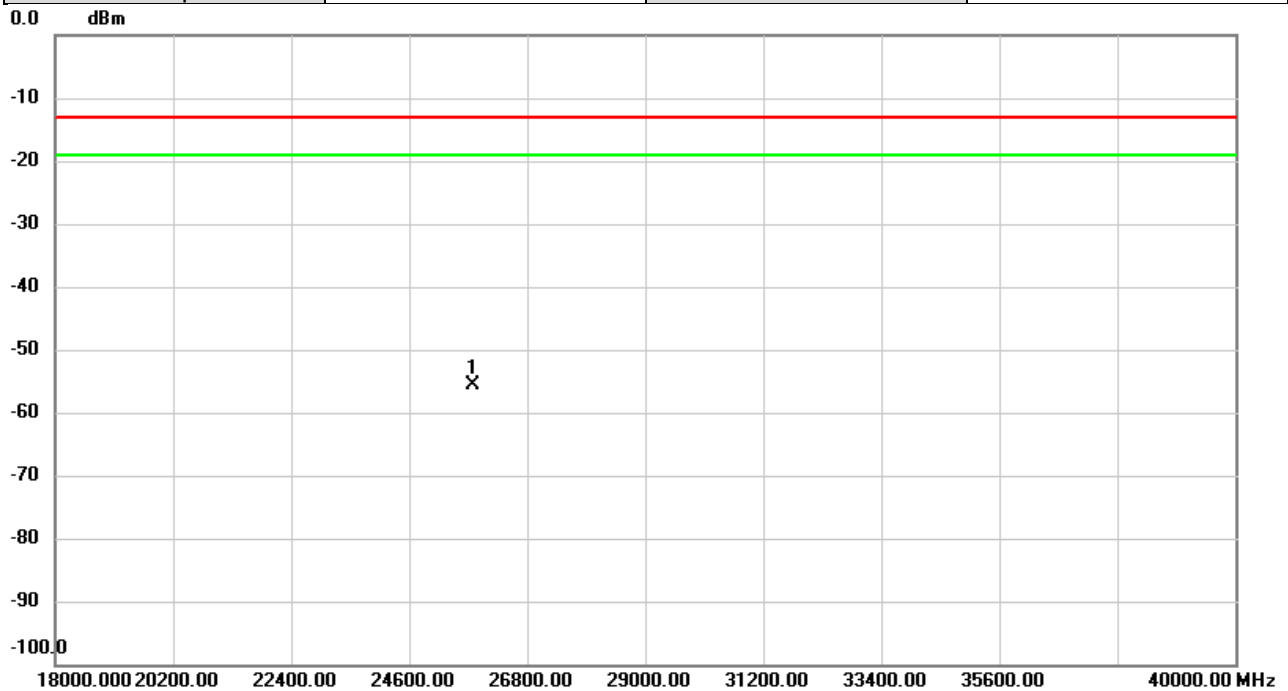


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25800.00	-56.84	1.10	-55.74	-13.00	-42.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/5/2
Test Channel	CH41490	Polarization	Vertical
Temp	27°C	Hum.	61%

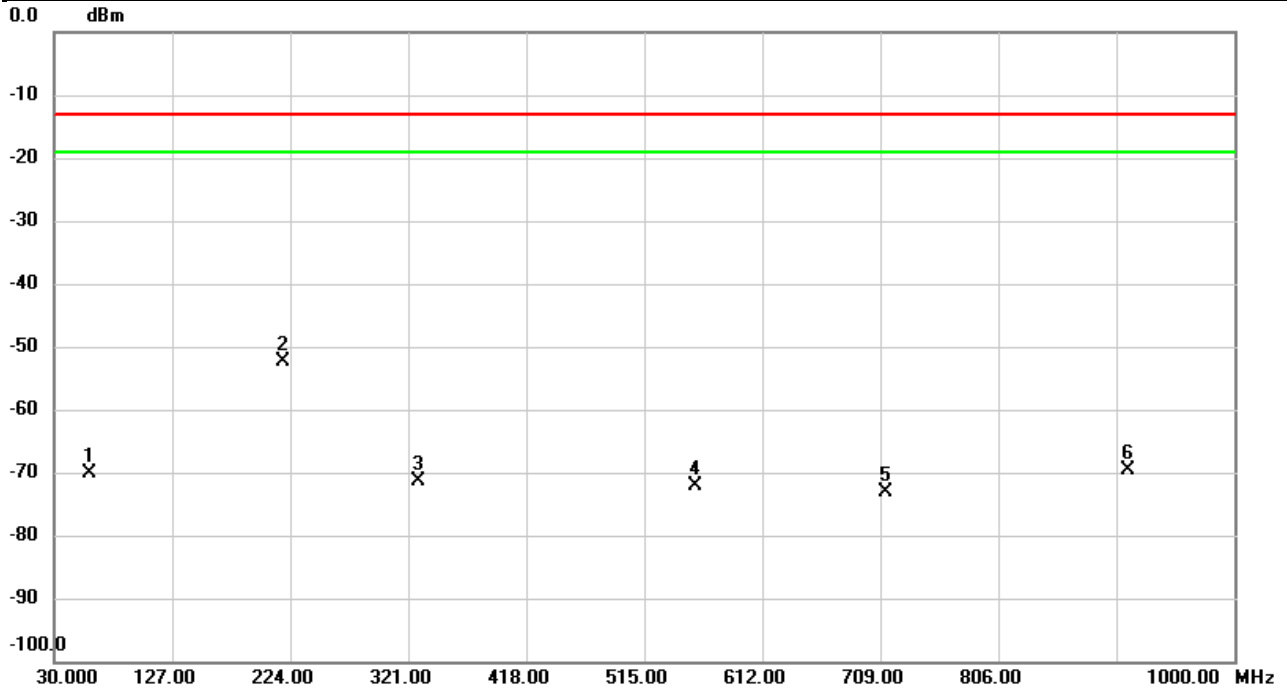


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.1647	-62.49	-7.64	-70.13	-13.00	-57.13	peak	
2	*	218.4063	-48.61	-3.80	-52.41	-13.00	-39.41	peak	
3		329.9563	-68.23	-3.09	-71.32	-13.00	-58.32	peak	
4		556.6453	-75.03	2.89	-72.14	-13.00	-59.14	peak	
5		714.1733	-76.94	3.81	-73.13	-13.00	-60.13	peak	
6		912.4413	-76.38	6.72	-69.66	-13.00	-56.66	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/5/2
Test Channel	CH41490	Polarization	Horizontal
Temp	27°C	Hum.	61%

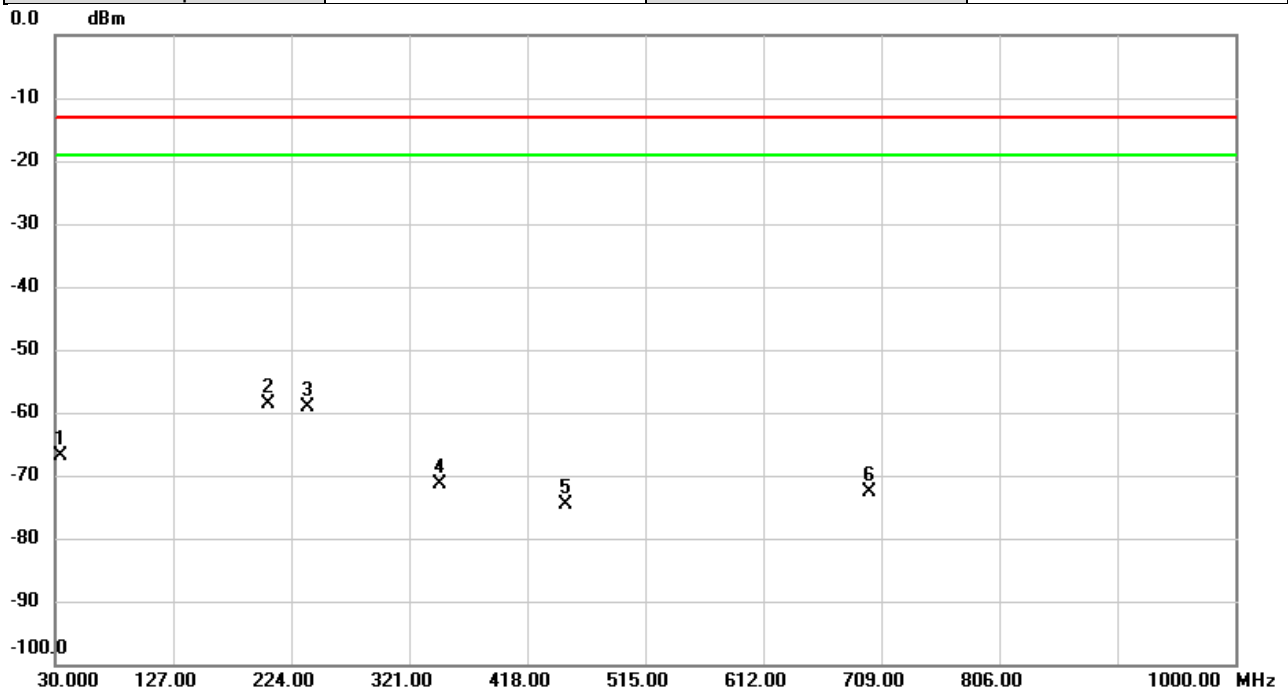


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		35.1733	-69.23	2.36	-66.87	-13.00	-53.87	peak	
2	*	204.6970	-48.98	-9.56	-58.54	-13.00	-45.54	peak	
3		237.9357	-50.97	-8.17	-59.14	-13.00	-46.14	peak	
4		346.4786	-68.53	-2.81	-71.34	-13.00	-58.34	peak	
5		449.0723	-72.69	-1.92	-74.61	-13.00	-61.61	peak	
6		698.9120	-75.21	2.54	-72.67	-13.00	-59.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH39750	Polarization	Vertical
Temp	25°C	Hum.	59%

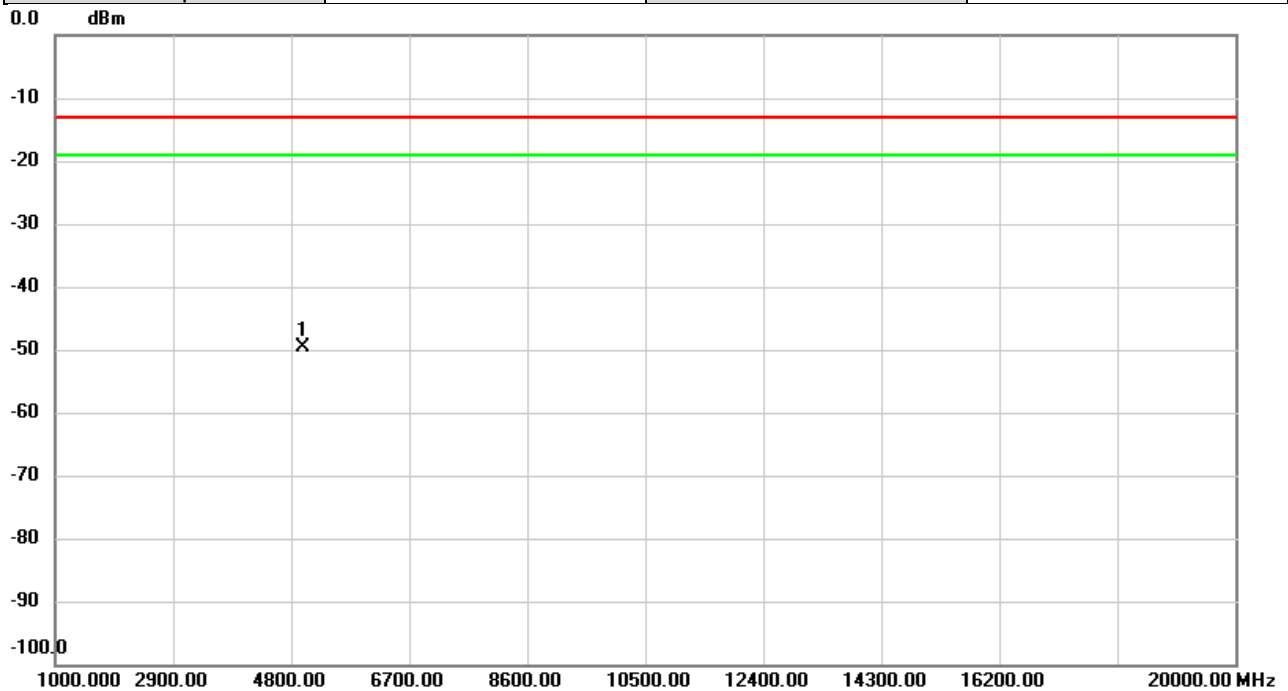


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.000	-63.17	13.55	-49.62	-13.00	-36.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH39750	Polarization	Horizontal
Temp	25°C	Hum.	59%

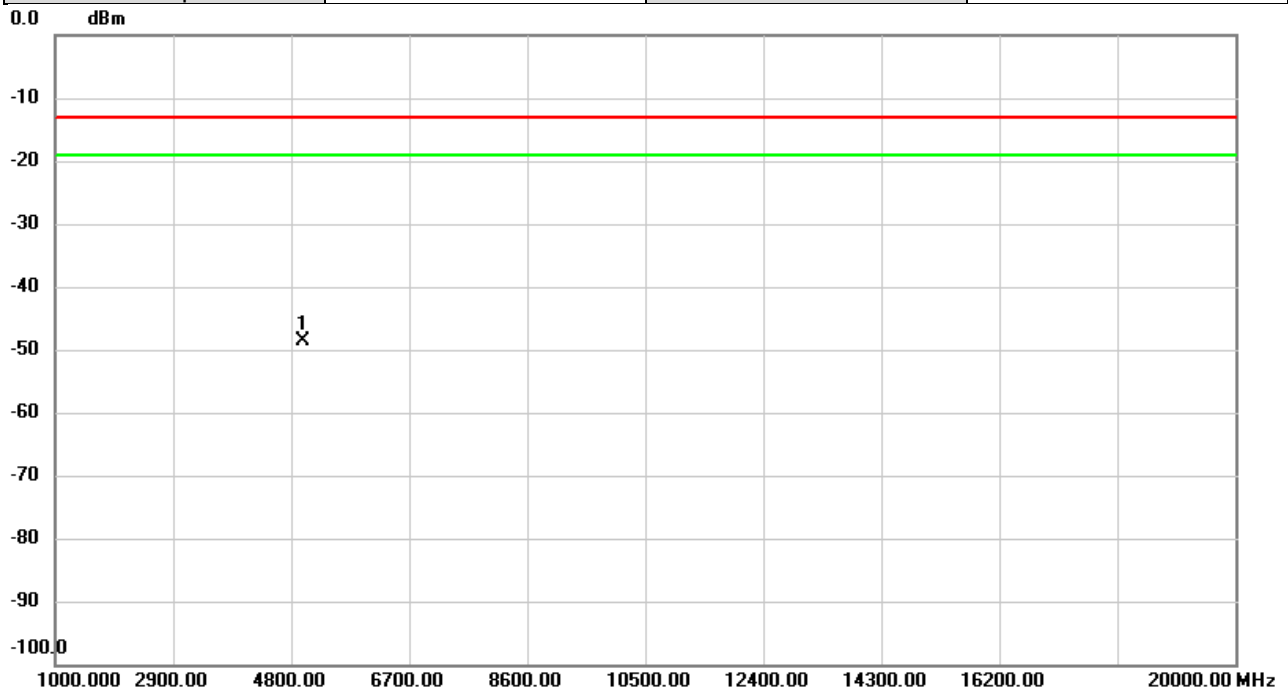


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.000	-61.87	13.29	-48.58	-13.00	-35.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH40620	Polarization	Vertical
Temp	25°C	Hum.	59%

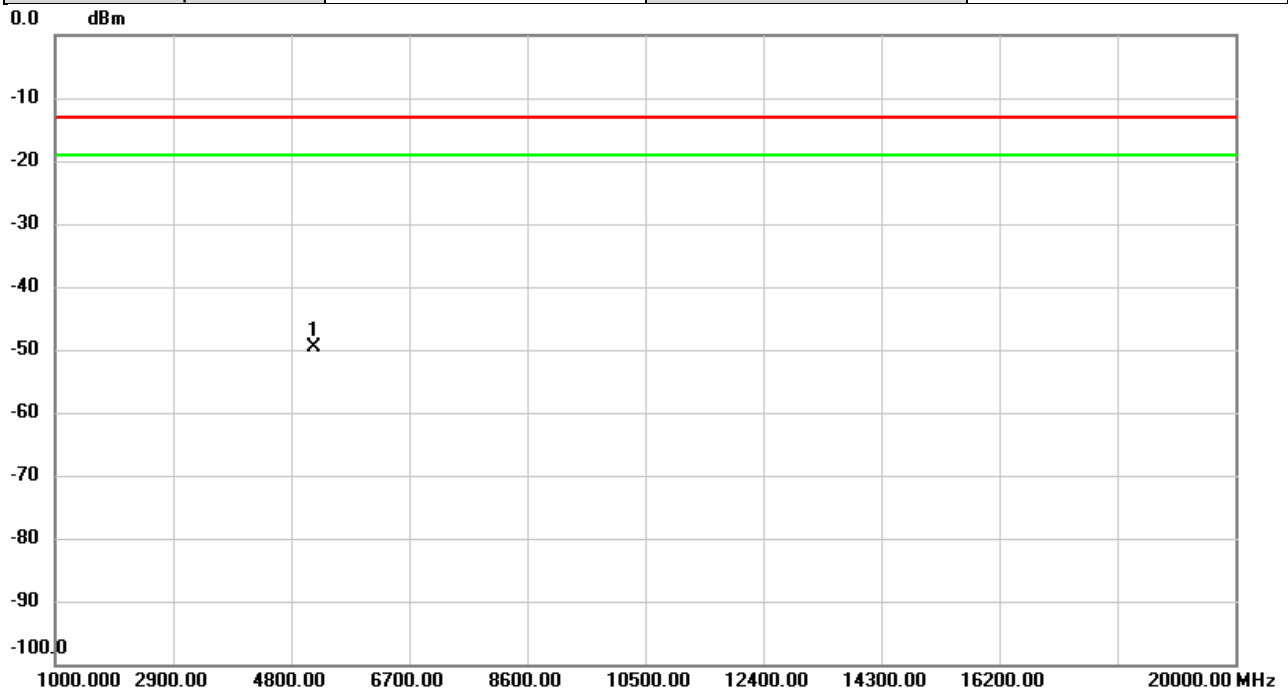


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5168.000	-63.25	13.72	-49.53	-13.00	-36.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH40620	Polarization	Horizontal
Temp	25°C	Hum.	59%

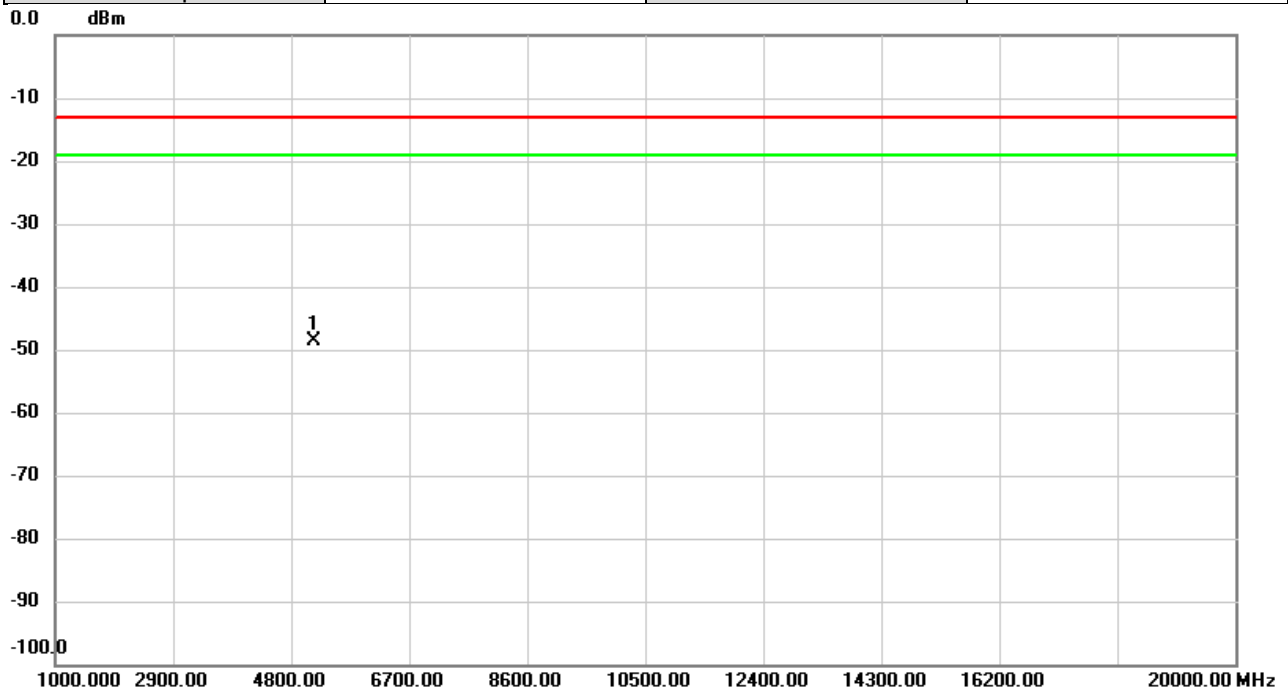


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5168.000	-62.41	13.73	-48.68	-13.00	-35.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH41490	Polarization	Vertical
Temp	25°C	Hum.	59%

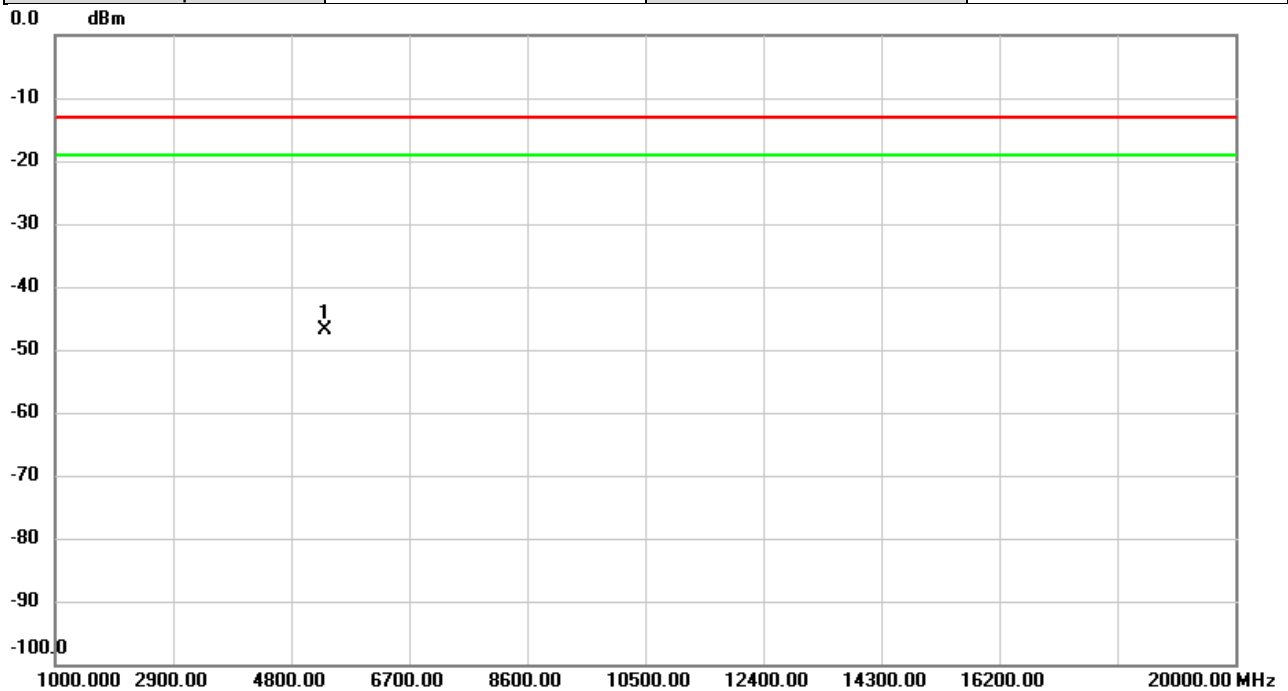


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5342.000	-61.06	14.10	-46.96	-13.00	-33.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/4/29
Test Channel	CH41490	Polarization	Horizontal
Temp	25°C	Hum.	59%

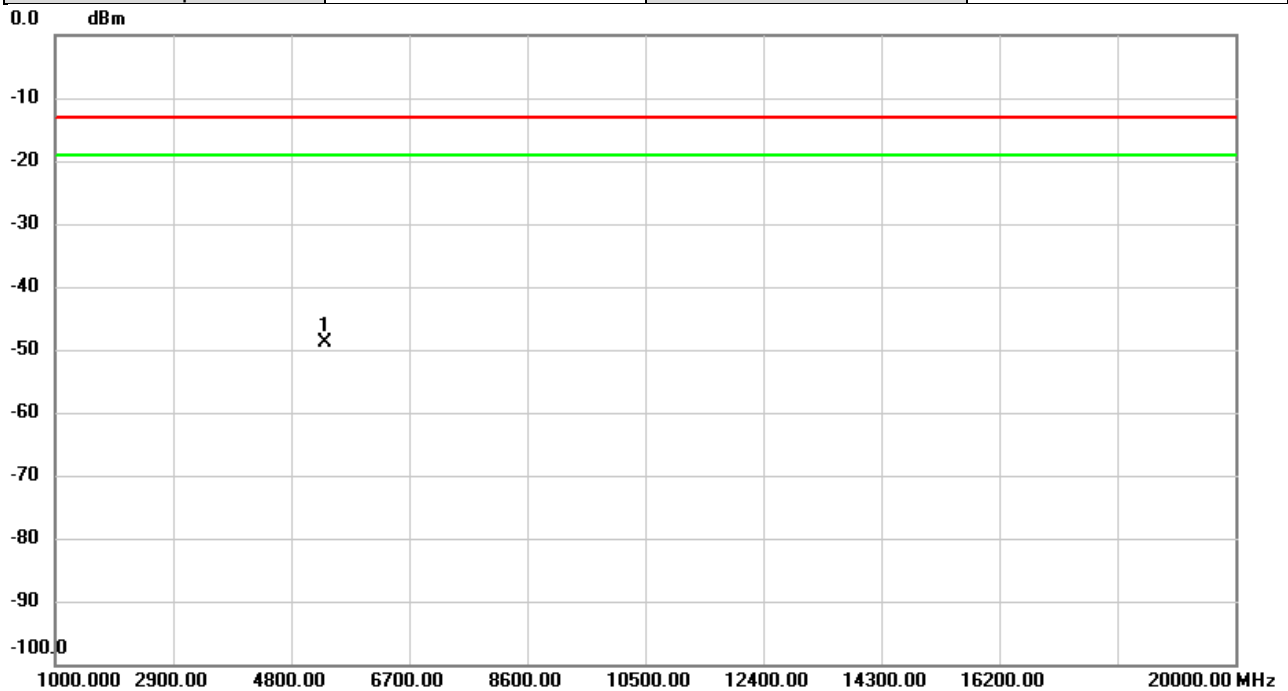


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5342.000	-62.53	13.78	-48.75	-13.00	-35.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/5/2
Test Channel	CH41490	Polarization	Vertical
Temp	27°C	Hum.	61%

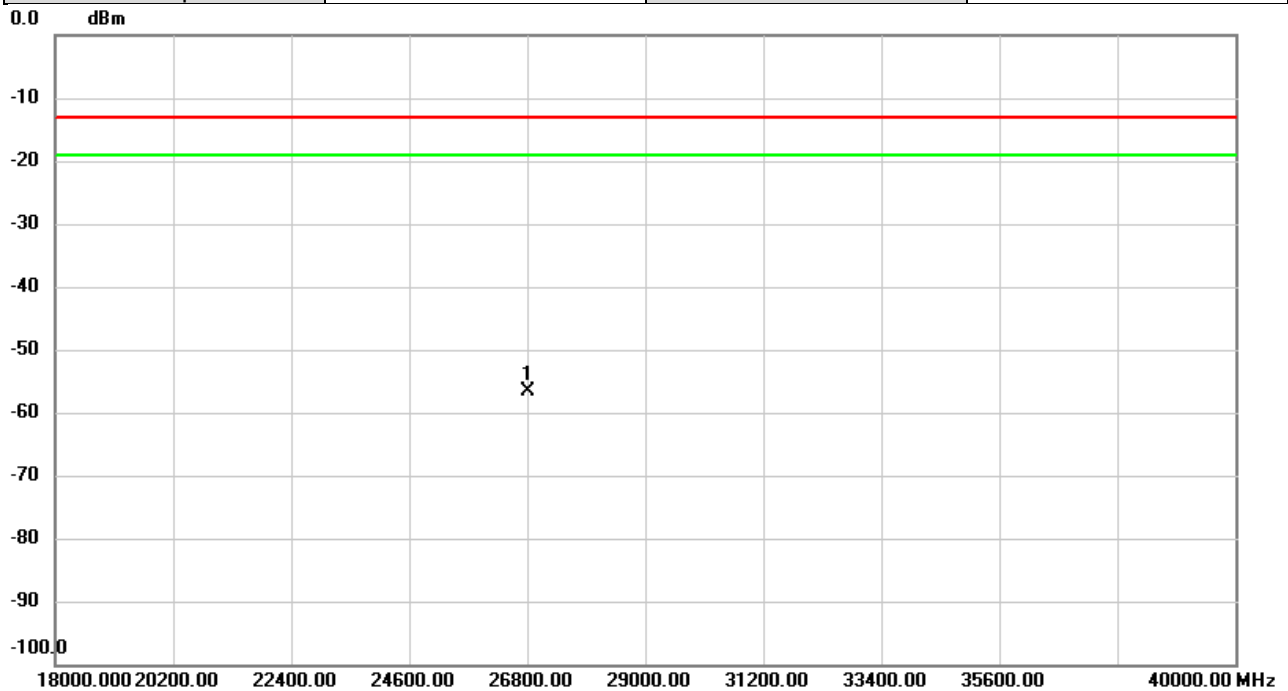


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	26800.00	-57.07	0.54	-56.53	-13.00	-43.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 41	Test Date	2025/5/2
Test Channel	CH41490	Polarization	Horizontal
Temp	27°C	Hum.	61%

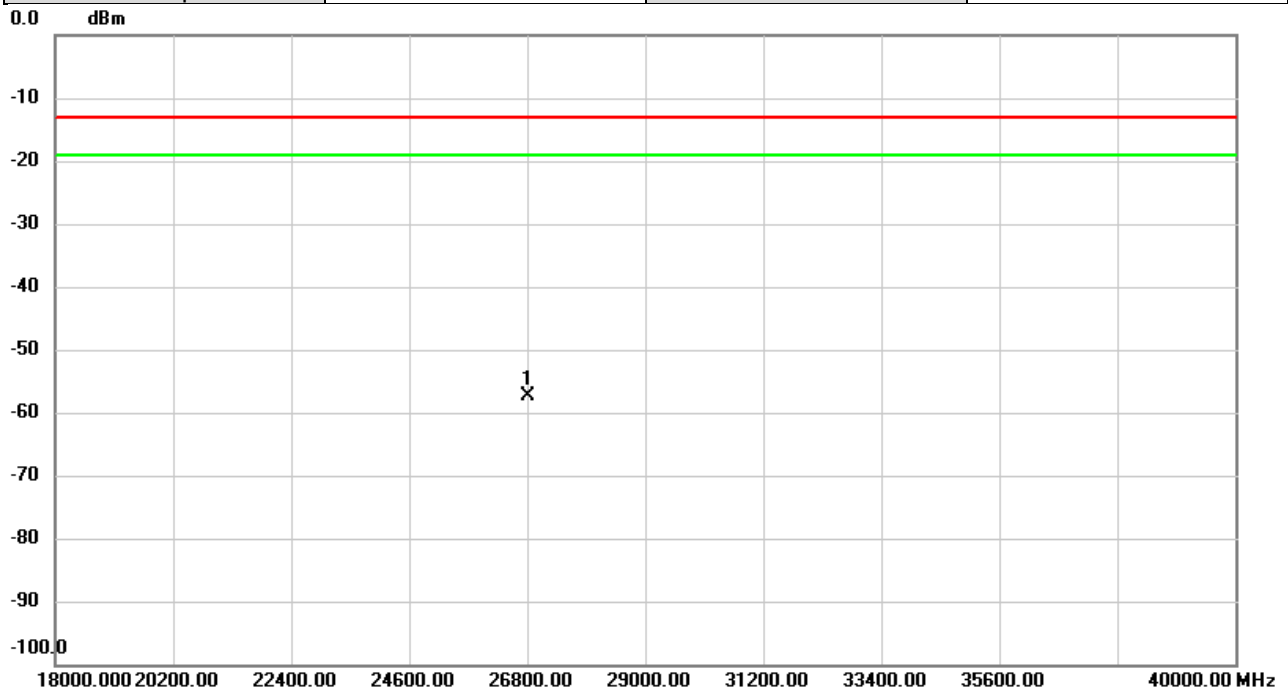


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	26800.00	-56.60	-0.81	-57.41	-13.00	-44.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/5/2
Test Channel	CH42590	Polarization	Vertical
Temp	27°C	Hum.	61%

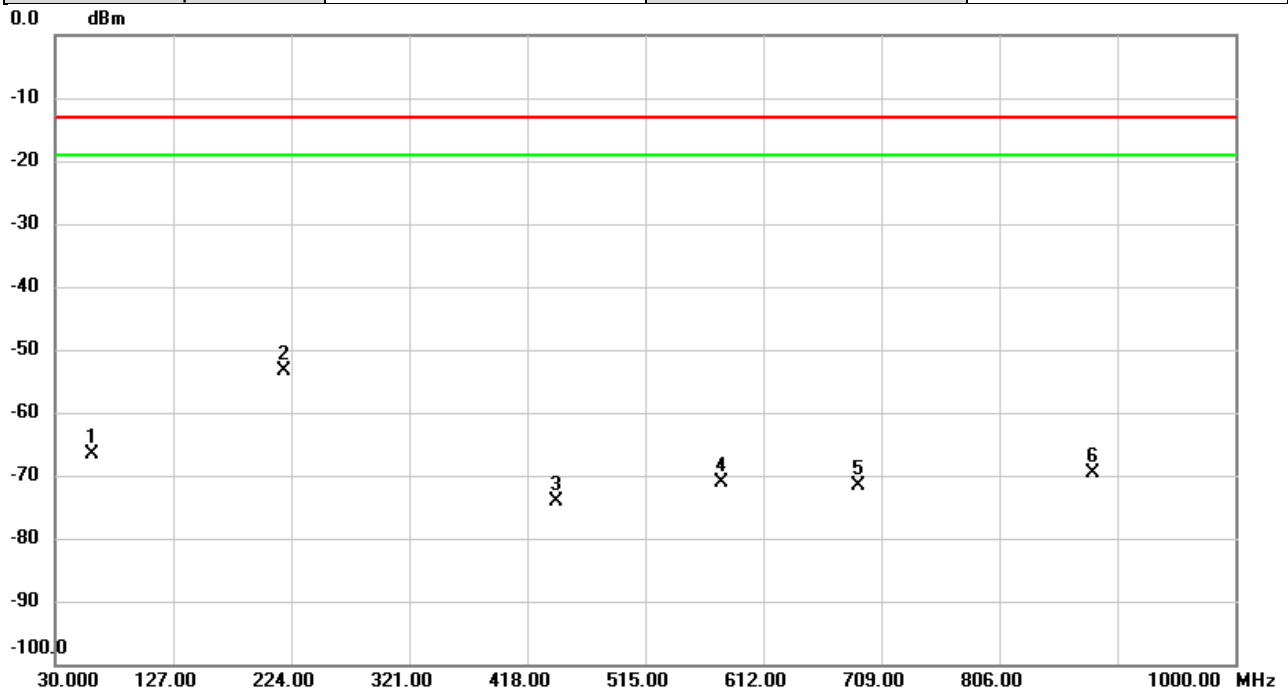


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.9730	-58.90	-7.77	-66.67	-13.00	-53.67	peak	
2	*	218.1153	-49.62	-3.78	-53.40	-13.00	-40.40	peak	
3		442.1530	-72.69	-1.45	-74.14	-13.00	-61.14	peak	
4		577.1770	-74.26	3.07	-71.19	-13.00	-58.19	peak	
5		690.1173	-75.39	3.70	-71.69	-13.00	-58.69	peak	
6		883.5030	-75.88	6.15	-69.73	-13.00	-56.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/5/2
Test Channel	CH42590	Polarization	Horizontal
Temp	27°C	Hum.	61%

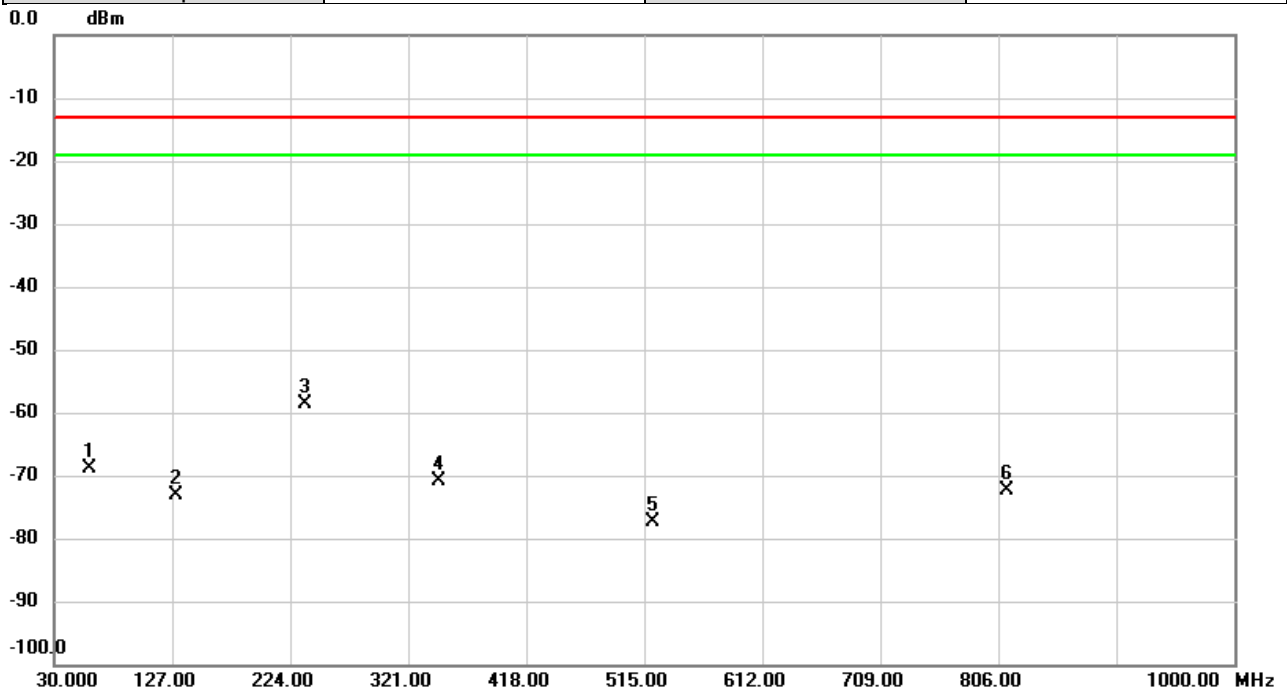


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.6173	-64.97	-3.96	-68.93	-13.00	-55.93	peak	
2		130.4597	-66.66	-6.53	-73.19	-13.00	-60.19	peak	
3	*	236.9010	-50.51	-8.15	-58.66	-13.00	-45.66	peak	
4		346.8020	-68.01	-2.78	-70.79	-13.00	-57.79	peak	
5		521.9840	-76.23	-1.08	-77.31	-13.00	-64.31	peak	
6		812.6930	-76.39	4.05	-72.34	-13.00	-59.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH41690	Polarization	Vertical
Temp	26°C	Hum.	54%

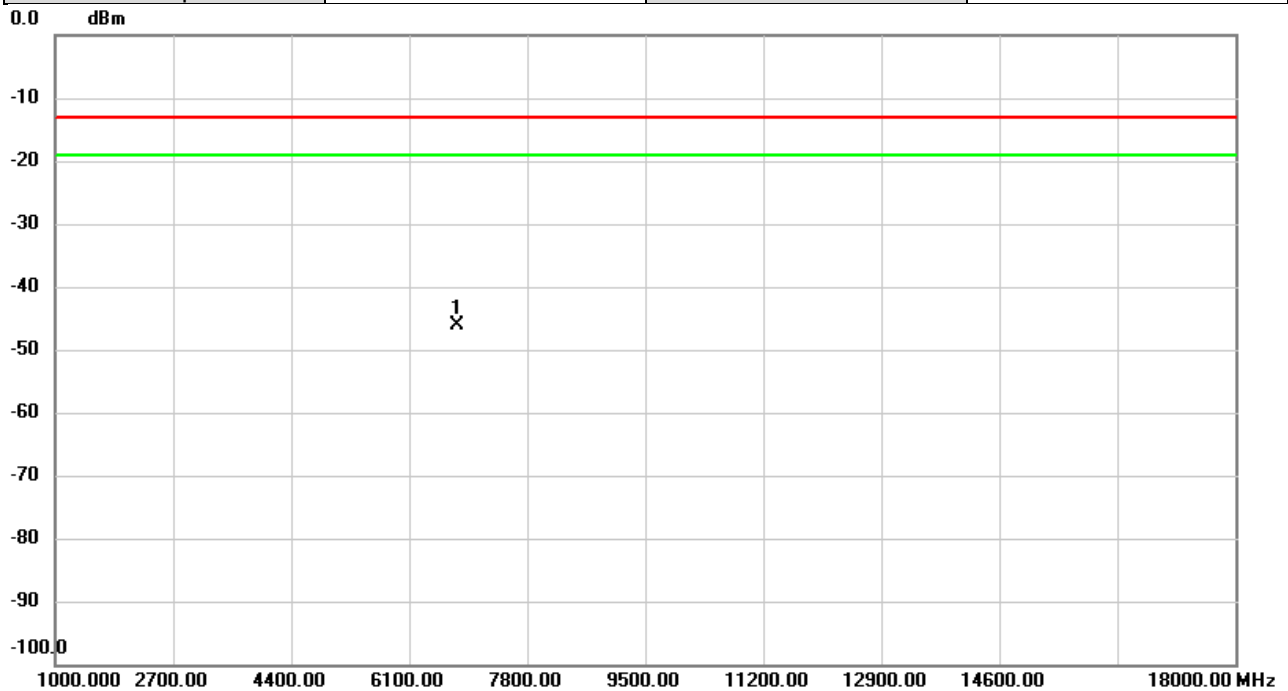


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6802.000	-63.84	17.80	-46.04	-13.00	-33.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH41690	Polarization	Horizontal
Temp	26°C	Hum.	54%

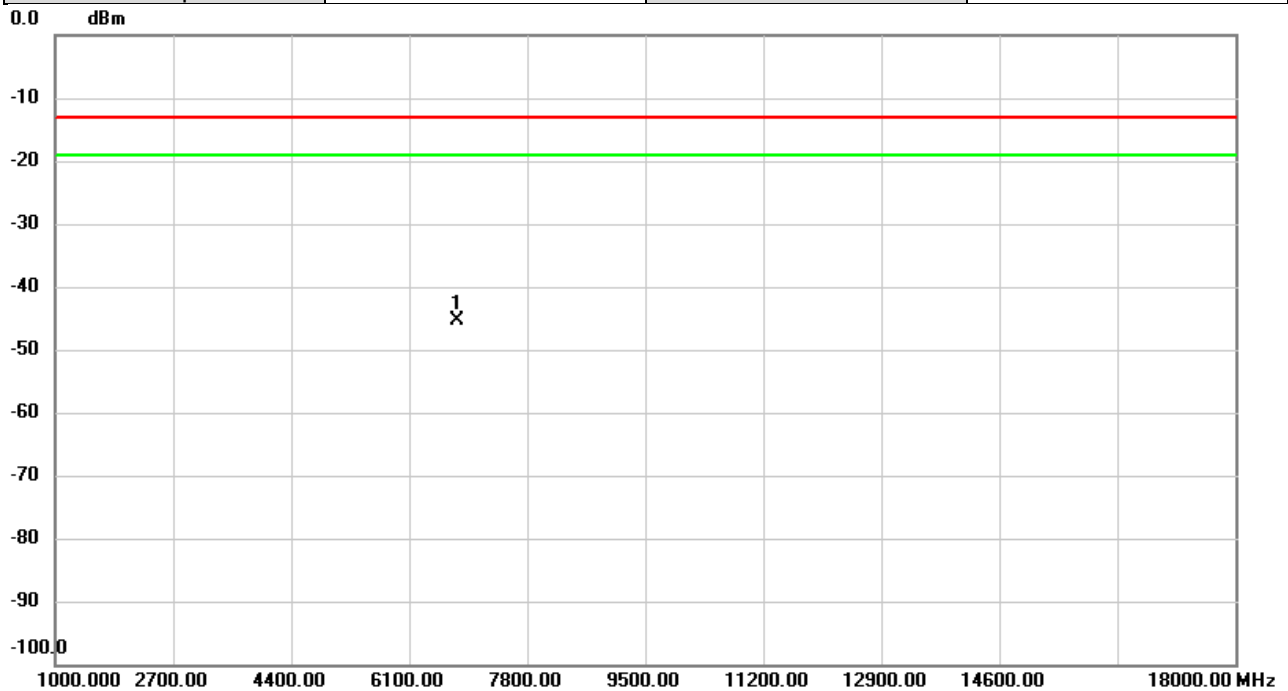


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6802.000	-62.97	17.58	-45.39	-13.00	-32.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH42590	Polarization	Vertical
Temp	26°C	Hum.	54%

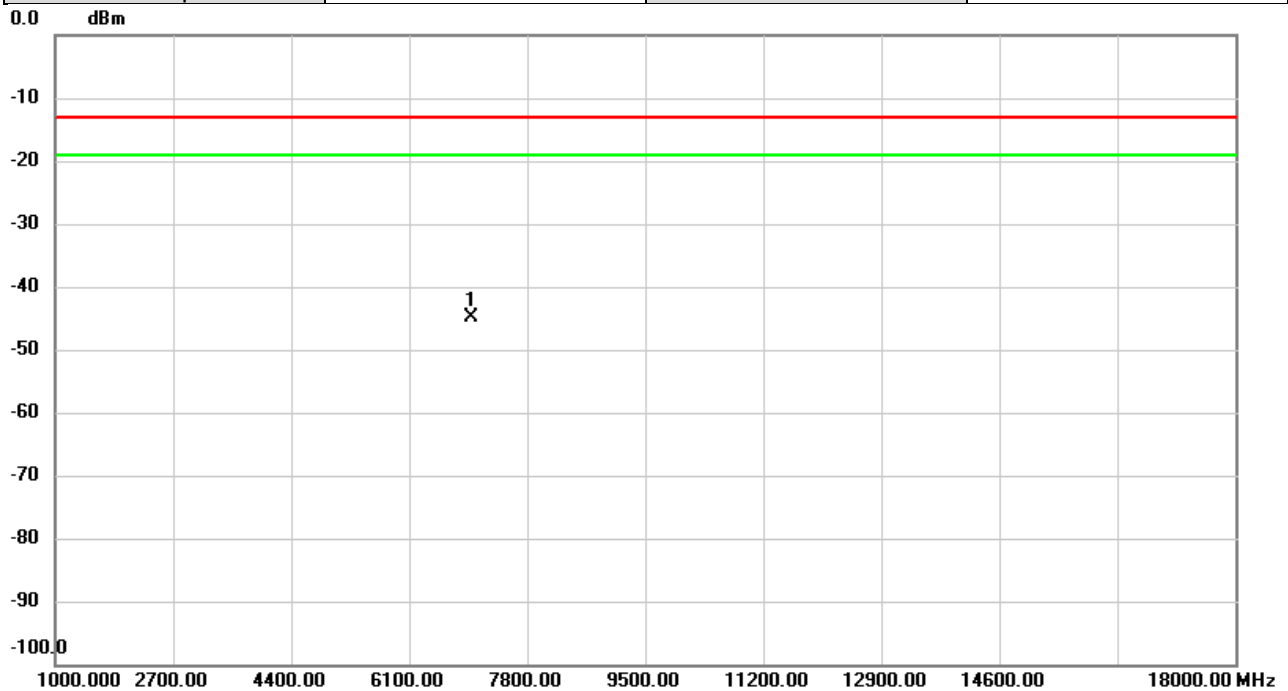


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7000.000	-62.68	17.88	-44.80	-13.00	-31.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH42590	Polarization	Horizontal
Temp	26°C	Hum.	54%

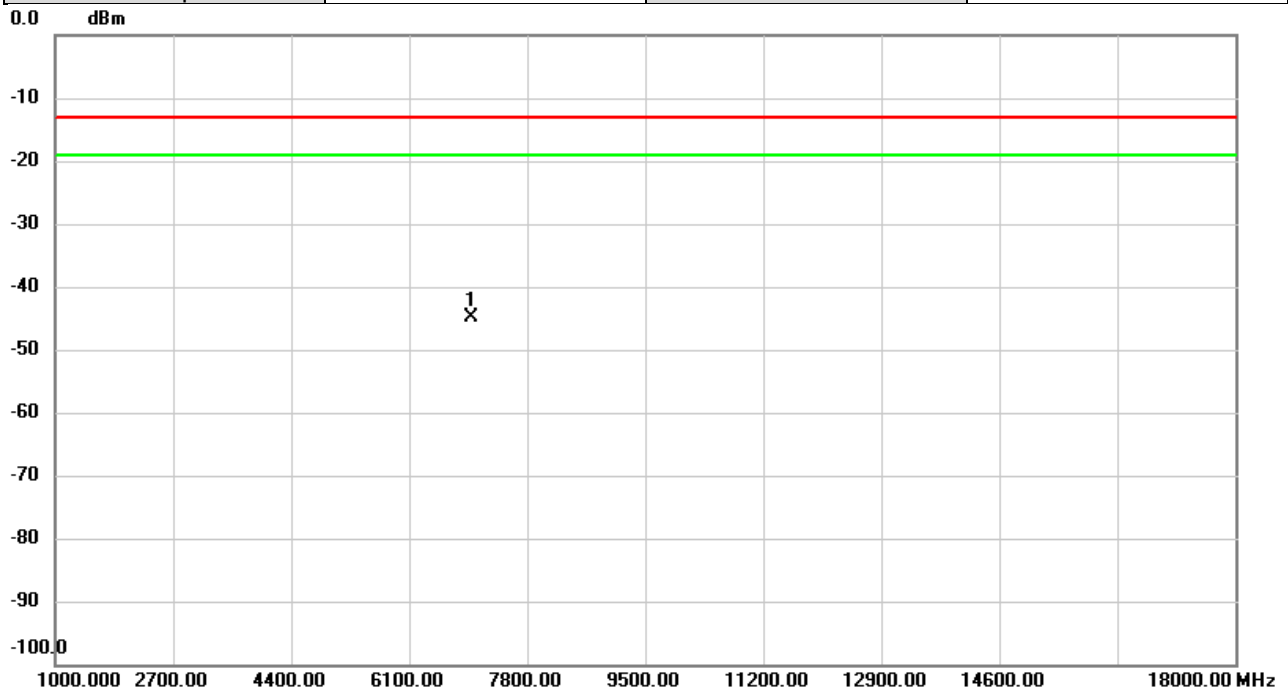


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7000.000	-62.68	17.74	-44.94	-13.00	-31.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH43490	Polarization	Vertical
Temp	26°C	Hum.	54%

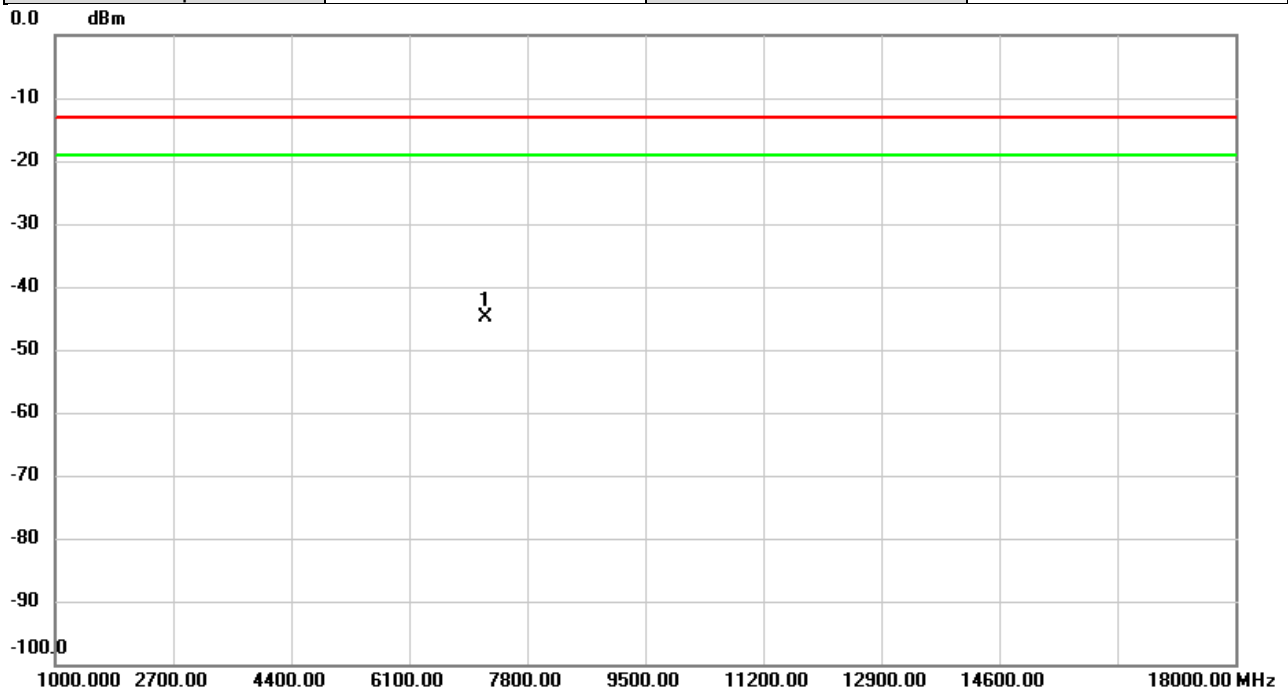


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7198.000	-62.91	18.02	-44.89	-13.00	-31.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band 42	Test Date	2025/4/30
Test Channel	CH43490	Polarization	Horizontal
Temp	26°C	Hum.	54%

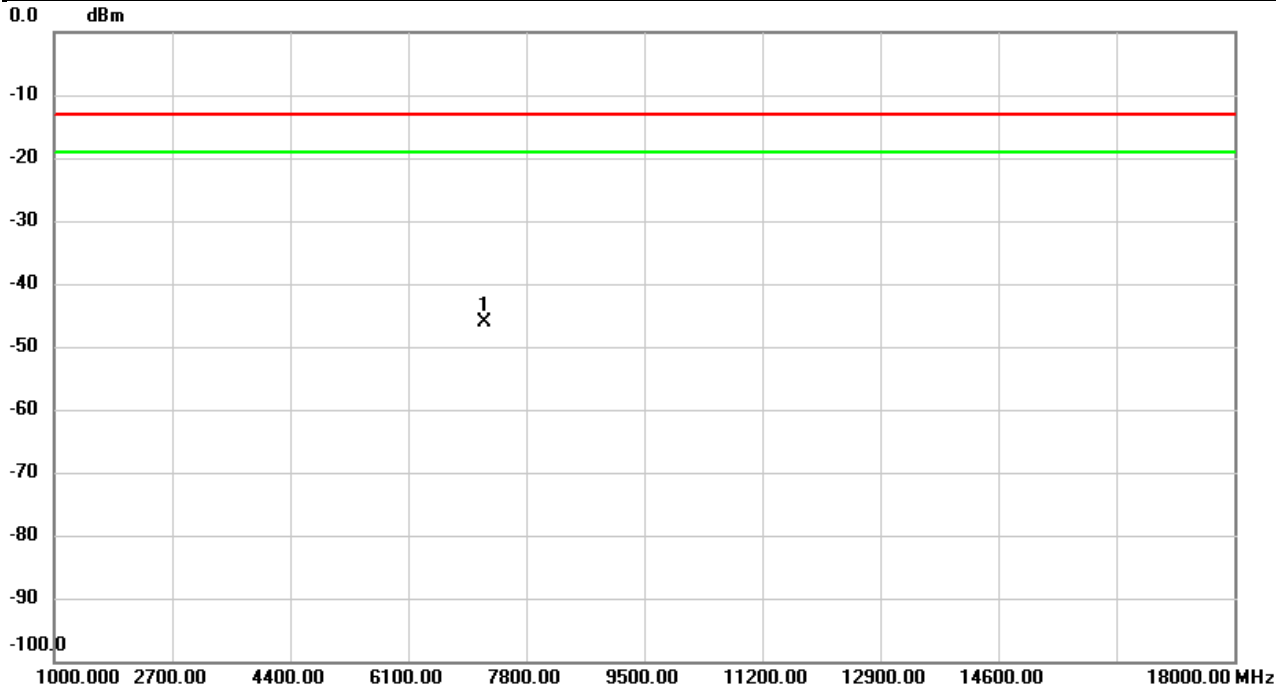

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7198.000	-63.90	17.86	-46.04	-13.00	-33.04	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/5/2
Test Channel	CH42590	Polarization	Vertical
Temp	27°C	Hum.	61%

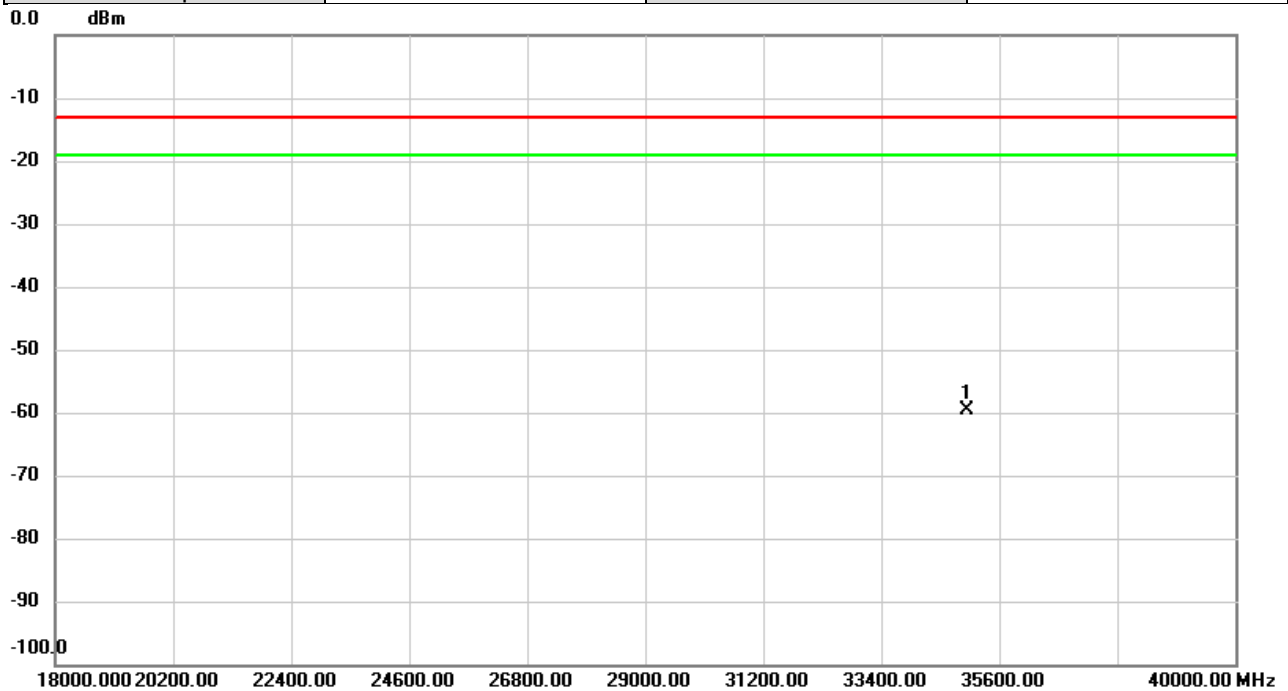


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	35000.00	-54.01	-5.53	-59.54	-13.00	-46.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 42	Test Date	2025/5/2
Test Channel	CH42590	Polarization	Horizontal
Temp	27°C	Hum.	61%

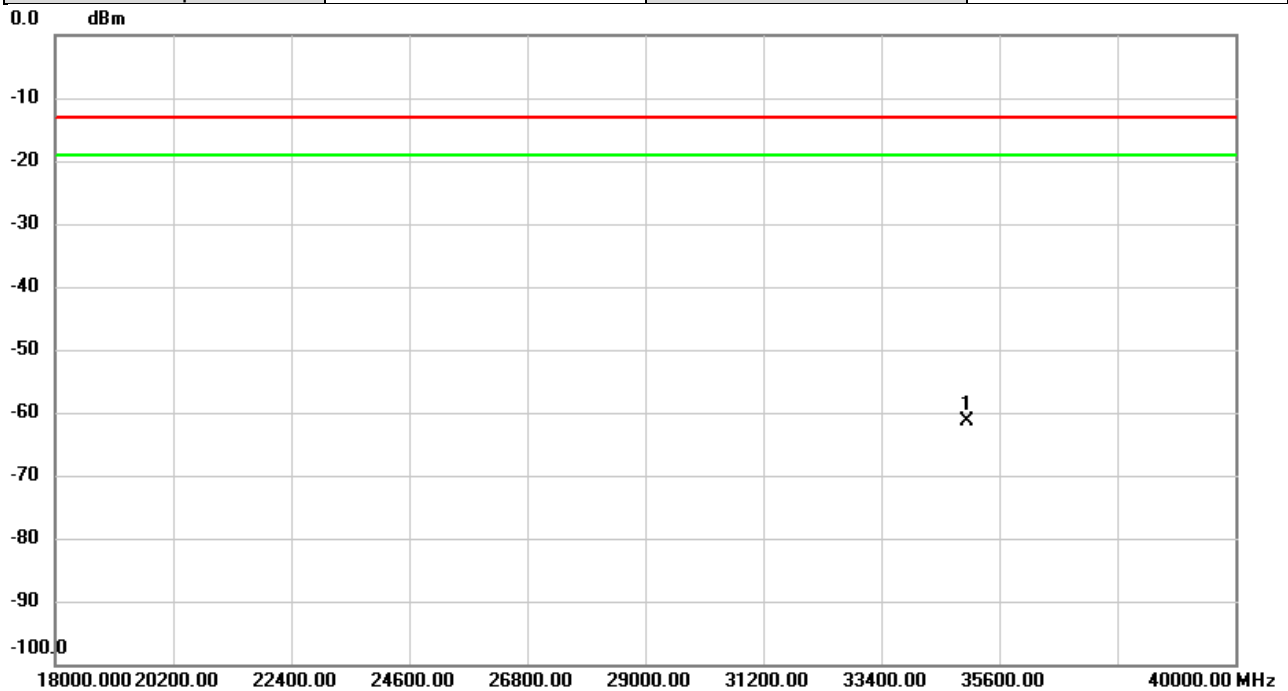


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	35000.00	-54.34	-6.97	-61.31	-13.00	-48.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/5/2
Test Channel	CH132322	Polarization	Vertical
Temp	27°C	Hum.	61%

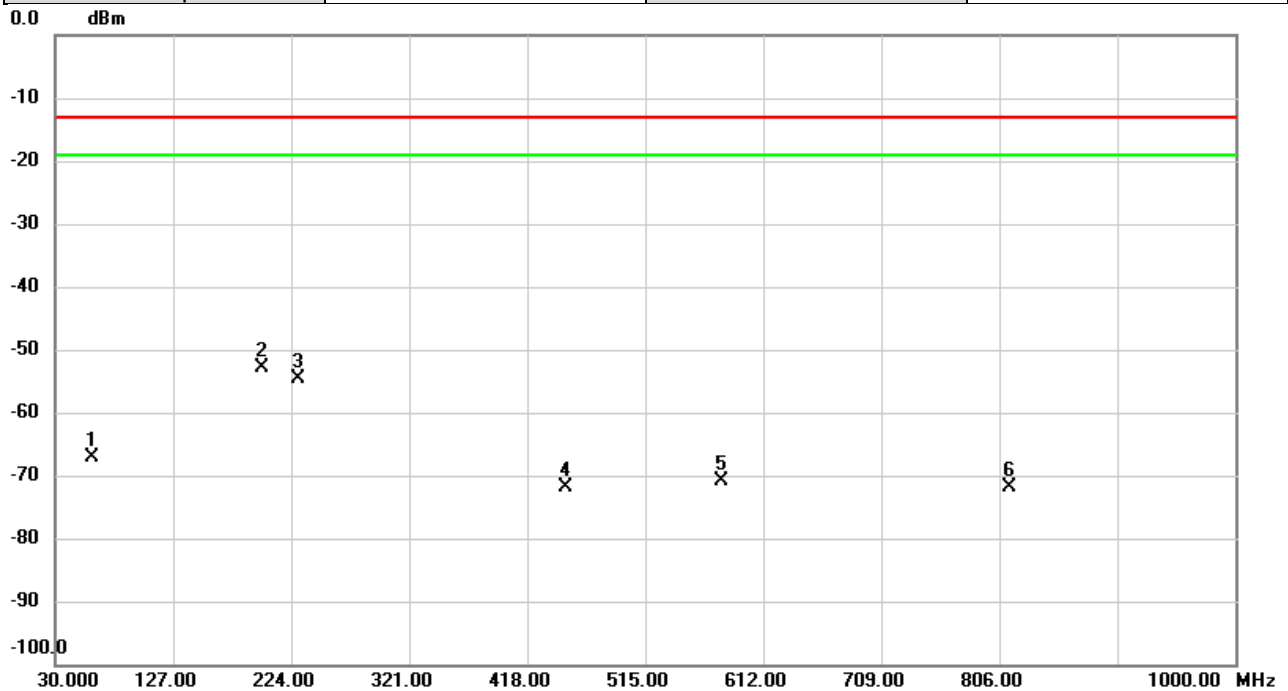


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		60.1993	-59.49	-7.75	-67.24	-13.00	-54.24	peak	
2	*	199.9763	-49.38	-3.38	-52.76	-13.00	-39.76	peak	
3		229.7230	-51.85	-2.83	-54.68	-13.00	-41.68	peak	
4		450.2687	-70.57	-1.28	-71.85	-13.00	-58.85	peak	
5		577.8883	-73.89	3.08	-70.81	-13.00	-57.81	peak	
6		814.9887	-76.05	4.21	-71.84	-13.00	-58.84	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/5/2
Test Channel	CH132322	Polarization	Horizontal
Temp	27°C	Hum.	61%

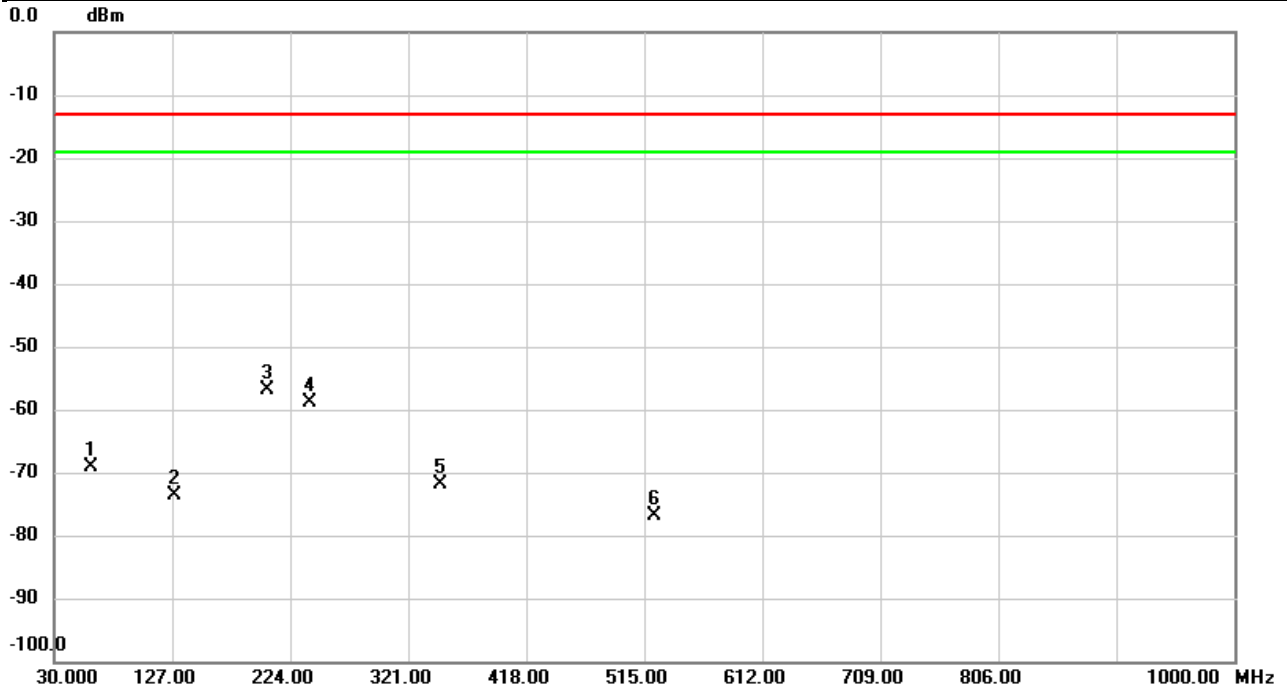


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		60.3610	-64.84	-4.17	-69.01	-13.00	-56.01	peak	
2		128.3257	-66.93	-6.72	-73.65	-13.00	-60.65	peak	
3	*	204.6000	-47.36	-9.56	-56.92	-13.00	-43.92	peak	
4		240.1343	-50.62	-8.23	-58.85	-13.00	-45.85	peak	
5		346.8990	-68.99	-2.78	-71.77	-13.00	-58.77	peak	
6		522.7923	-75.90	-1.07	-76.97	-13.00	-63.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132072	Polarization	Vertical
Temp	25°C	Hum.	59%

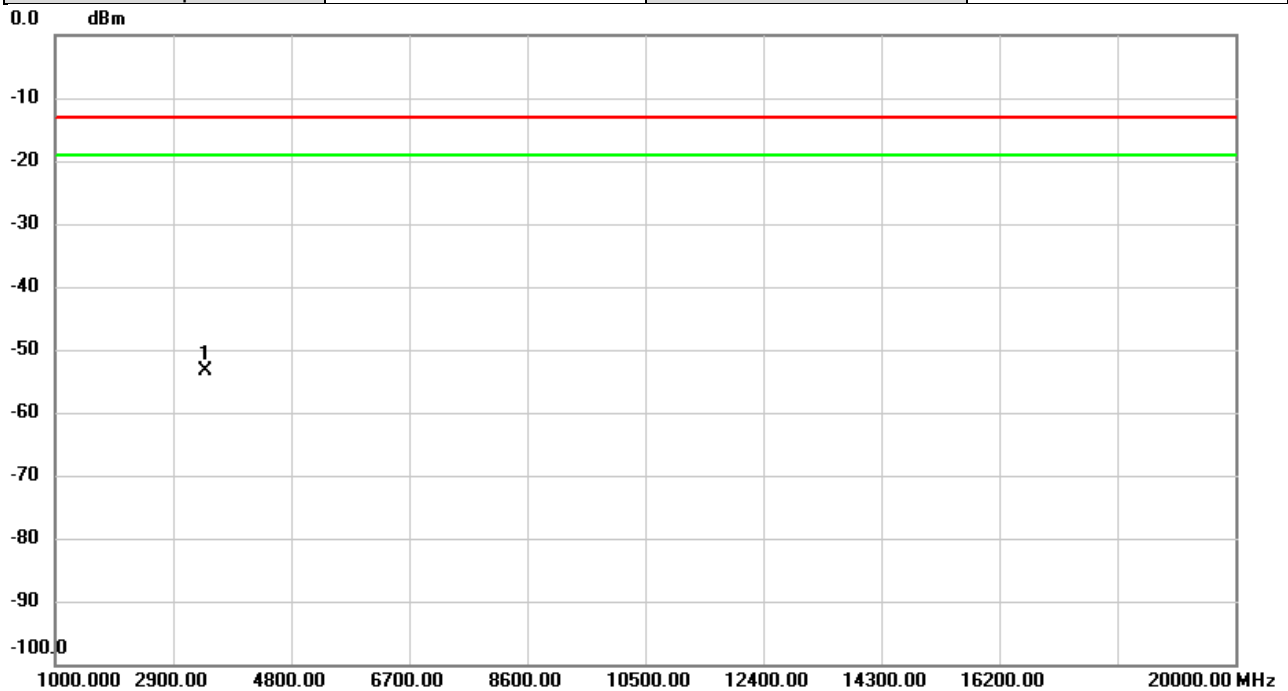


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3422.000	-63.47	10.07	-53.40	-13.00	-40.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132072	Polarization	Horizontal
Temp	25°C	Hum.	59%

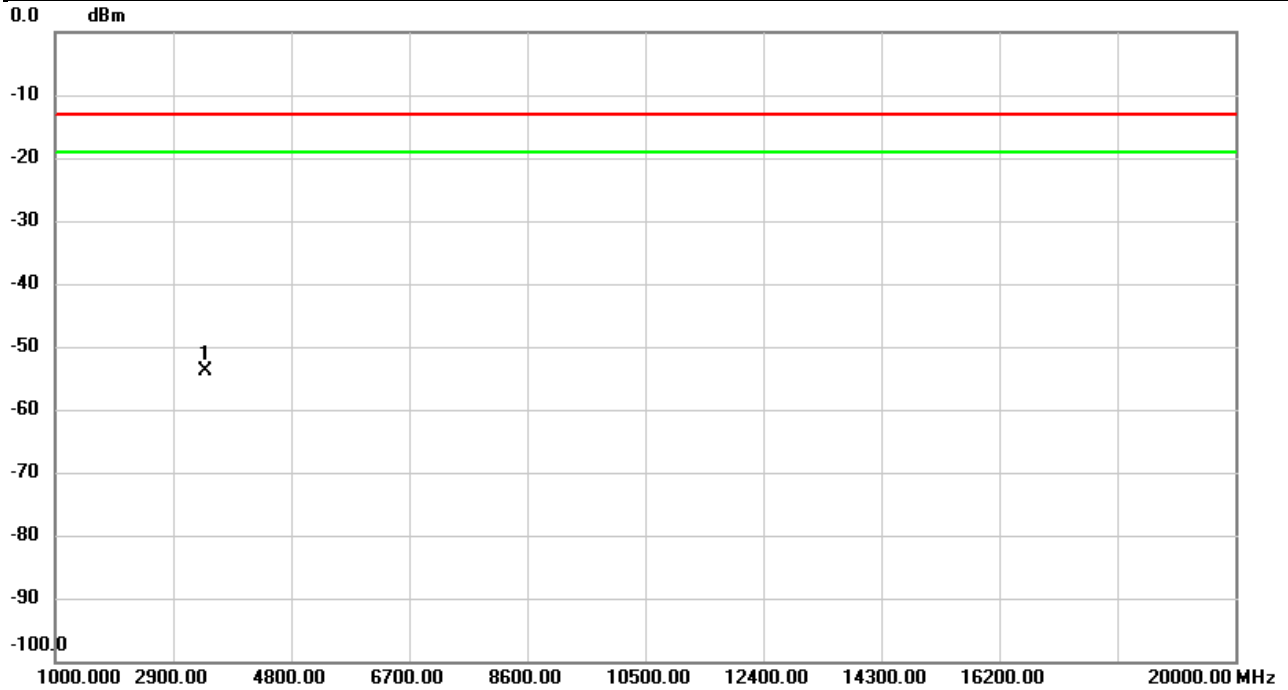


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3422.000	-63.57	9.71	-53.86	-13.00	-40.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132322	Polarization	Vertical
Temp	25°C	Hum.	59%

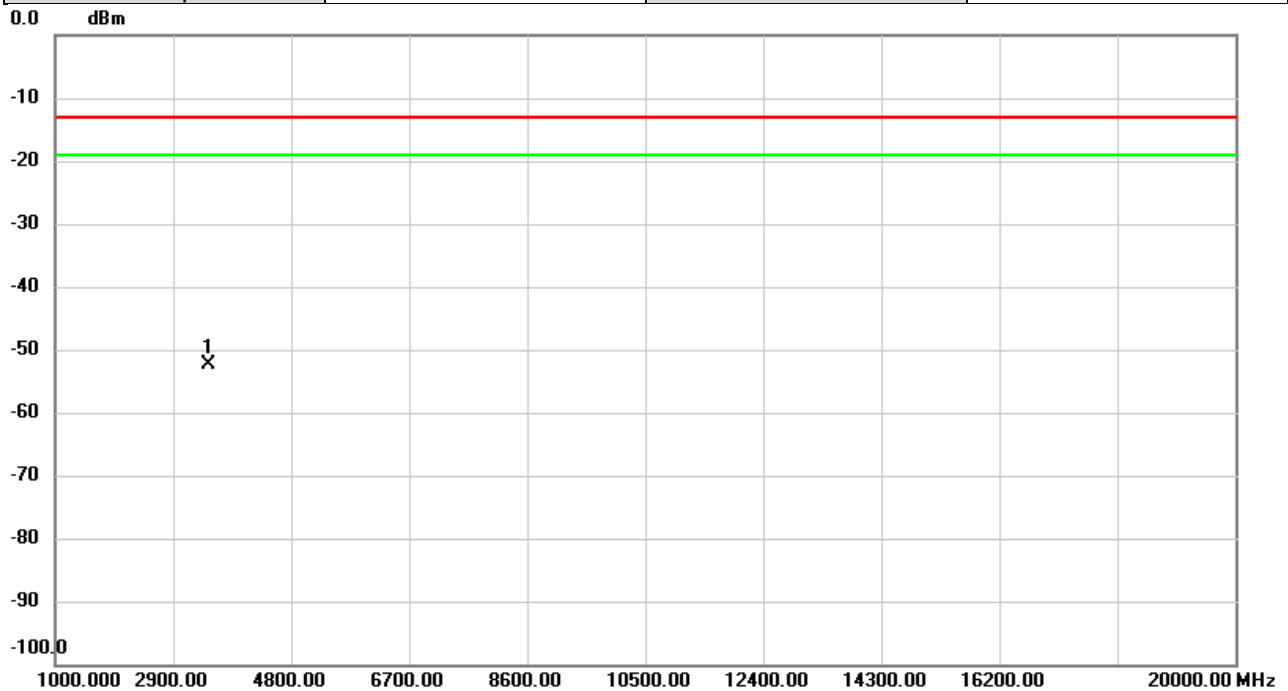


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3472.000	-62.62	10.26	-52.36	-13.00	-39.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132322	Polarization	Horizontal
Temp	25°C	Hum.	59%

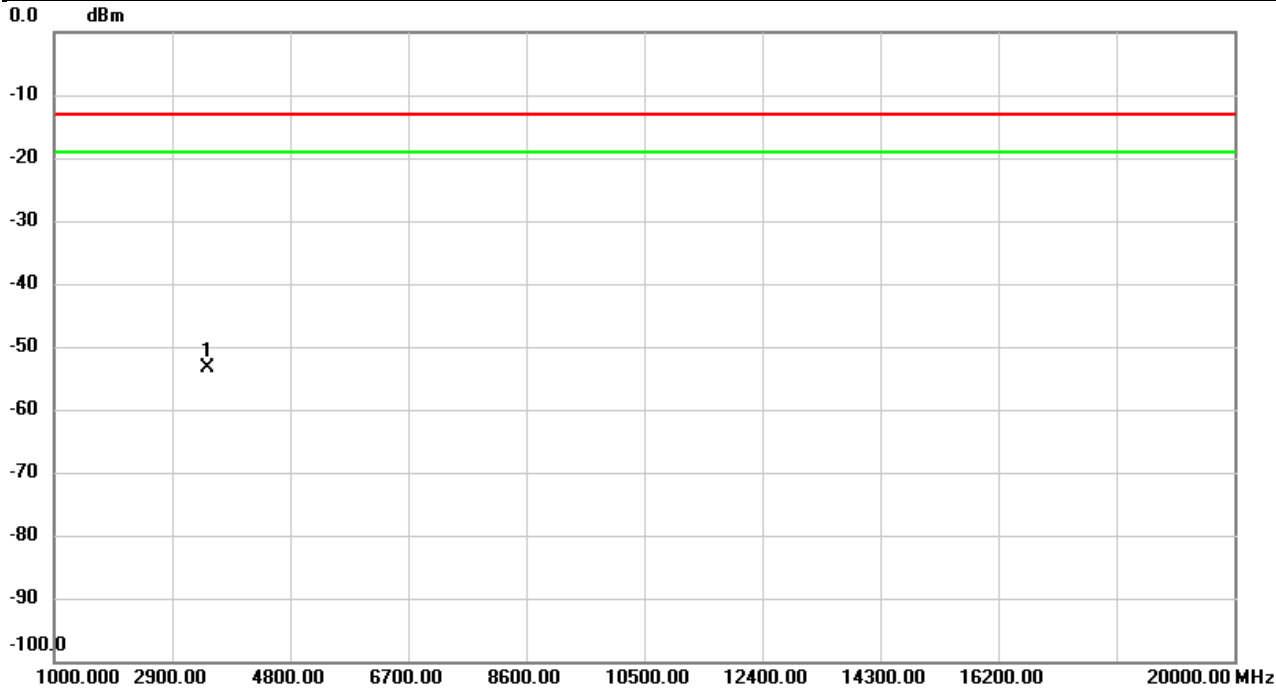

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3472.000	-63.44	10.02	-53.42	-13.00	-40.42	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132572	Polarization	Vertical
Temp	25°C	Hum.	59%

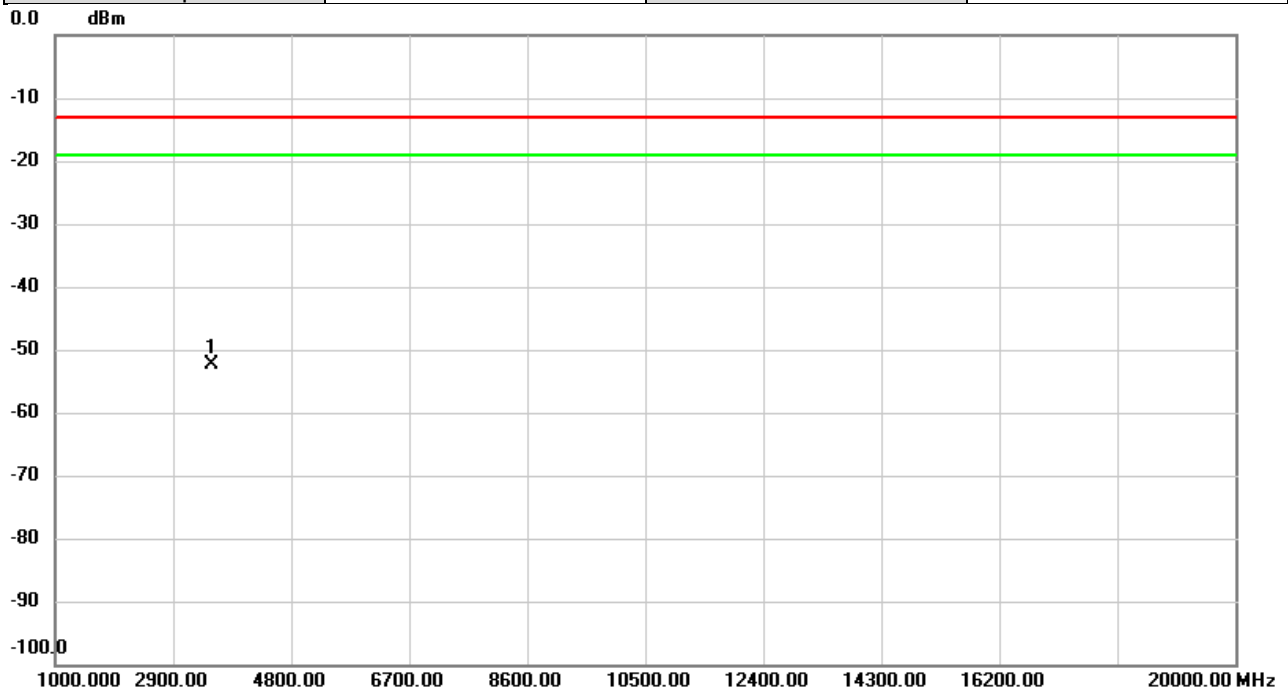


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3522.000	-62.73	10.26	-52.47	-13.00	-39.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 66	Test Date	2025/4/29
Test Channel	CH132572	Polarization	Horizontal
Temp	25°C	Hum.	59%

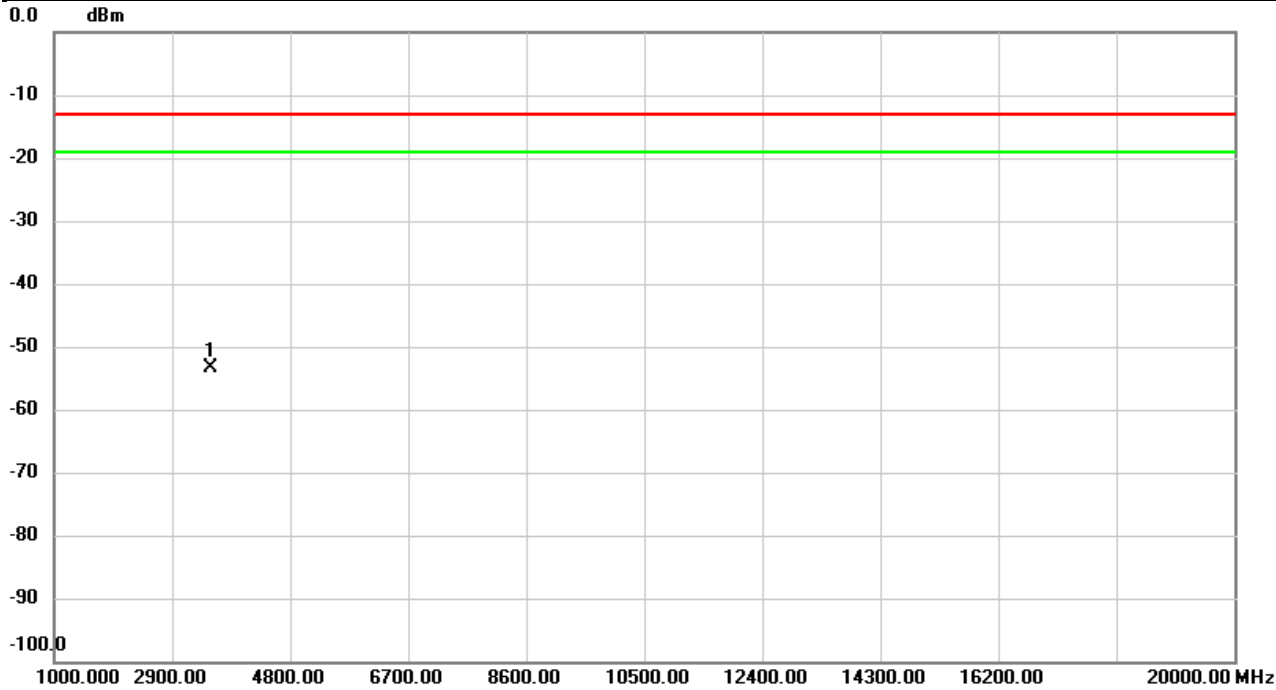


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3522.000	-63.47	10.00	-53.47	-13.00	-40.47	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/5/2
Test Channel	CH133372	Polarization	Vertical
Temp	27°C	Hum.	61%

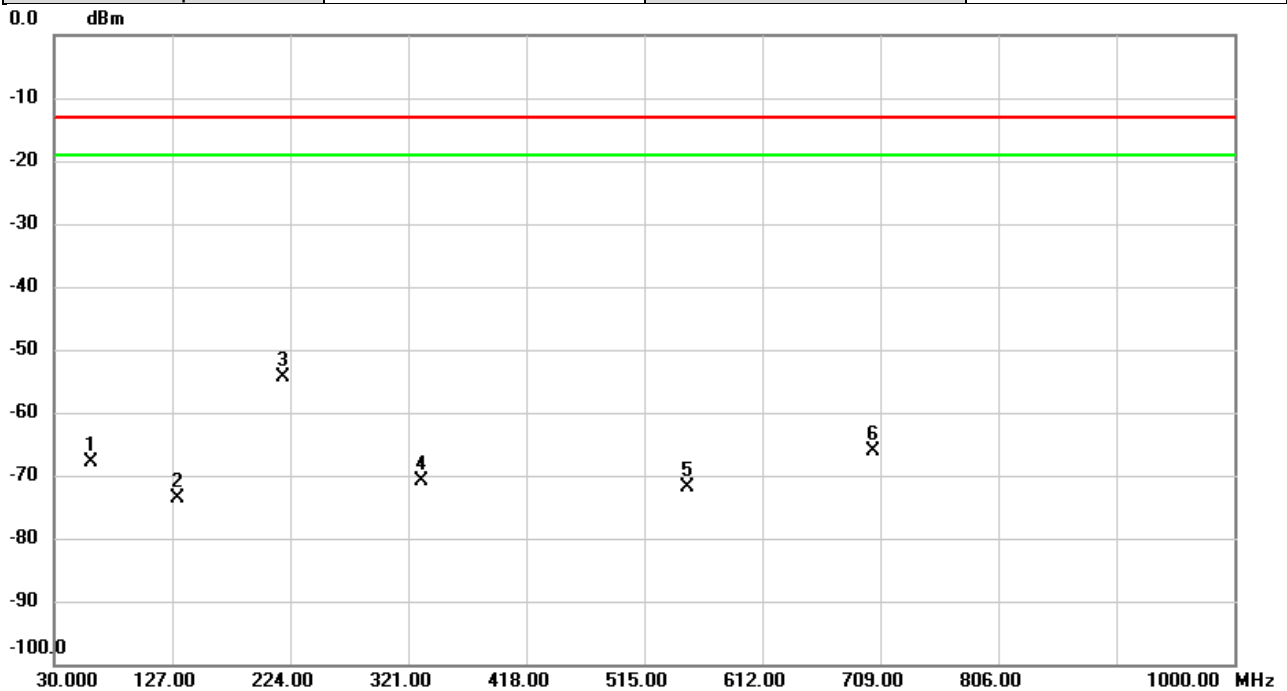


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		60.4903	-60.16	-7.73	-67.89	-13.00	-54.89	peak	
2		130.9770	-68.20	-5.35	-73.55	-13.00	-60.55	peak	
3	*	218.6327	-50.60	-3.81	-54.41	-13.00	-41.41	peak	
4		331.4760	-67.82	-3.07	-70.89	-13.00	-57.89	peak	
5		550.6637	-74.82	2.84	-71.98	-13.00	-58.98	peak	
6		703.7943	-69.98	3.80	-66.18	-13.00	-53.18	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/5/2
Test Channel	CH133372	Polarization	Horizontal
Temp	27°C	Hum.	61%

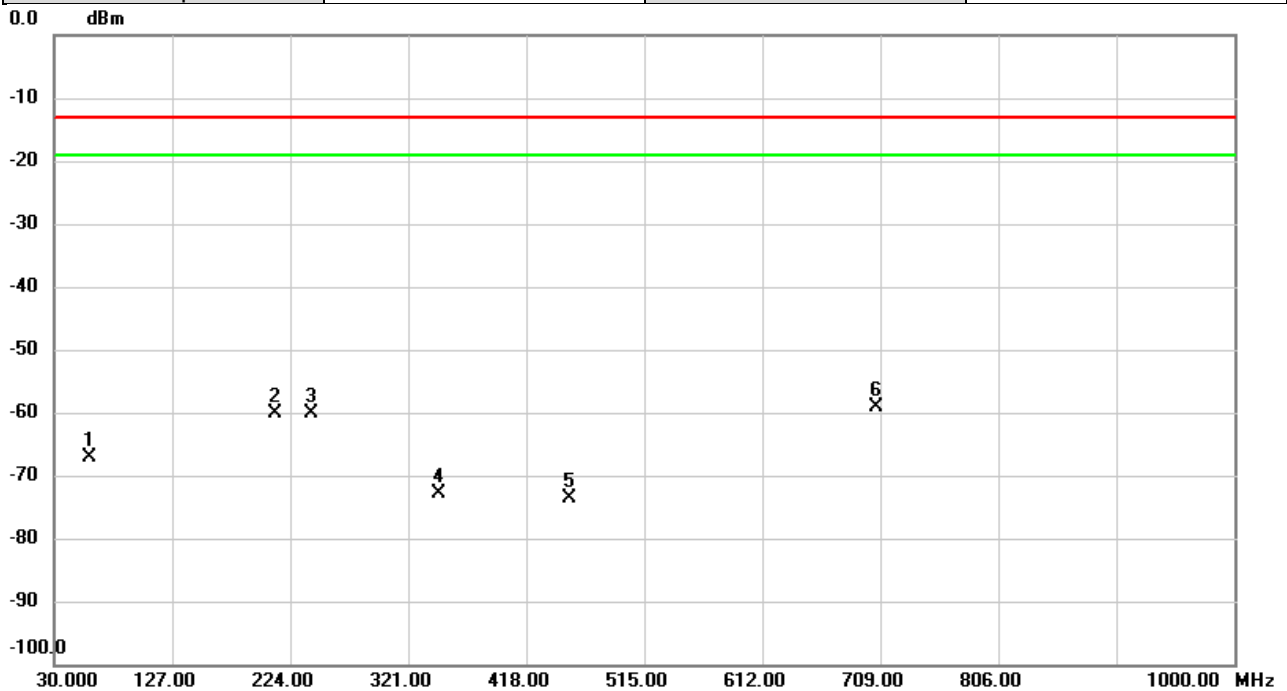


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.5850	-63.21	-3.95	-67.16	-13.00	-54.16	peak	
2		211.5840	-50.65	-9.44	-60.09	-13.00	-47.09	peak	
3		241.0073	-51.86	-8.21	-60.07	-13.00	-47.07	peak	
4		346.3817	-70.09	-2.81	-72.90	-13.00	-59.90	peak	
5		452.9200	-71.76	-1.88	-73.64	-13.00	-60.64	peak	
6	*	705.9283	-61.82	2.69	-59.13	-13.00	-46.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133222	Polarization	Vertical
Temp	26°C	Hum.	54%

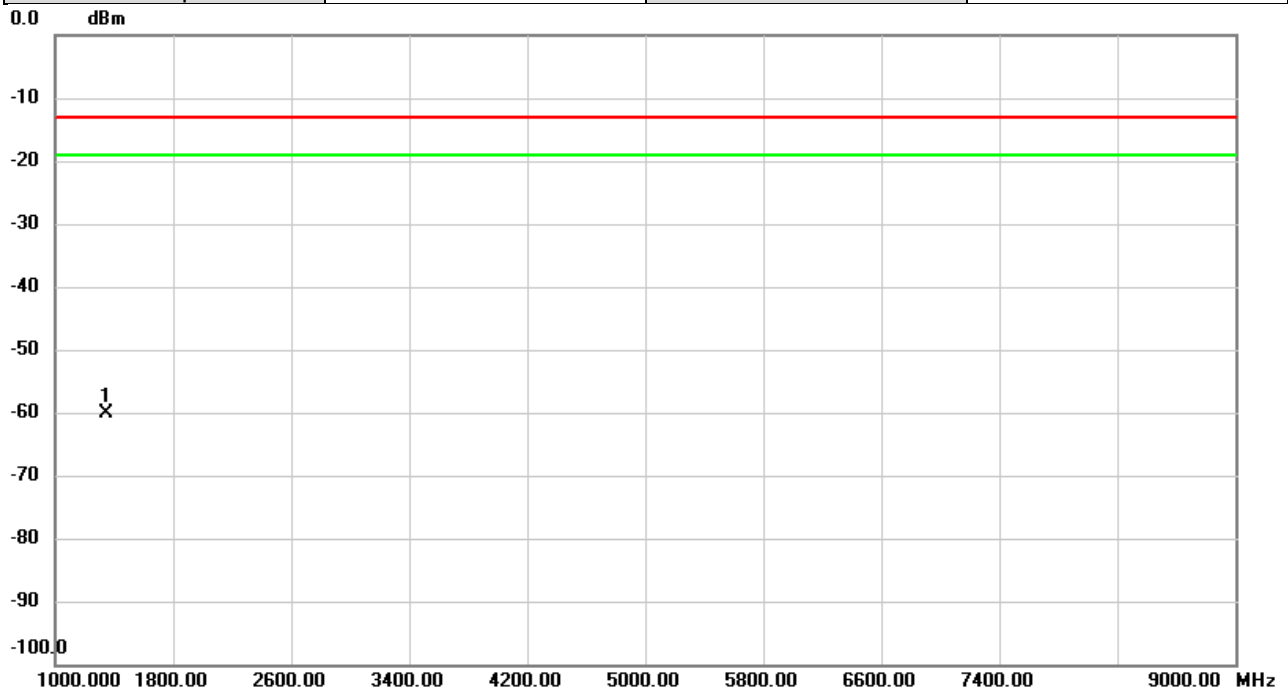


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1346.000	-64.94	4.73	-60.21	-13.00	-47.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133222	Polarization	Horizontal
Temp	26°C	Hum.	54%

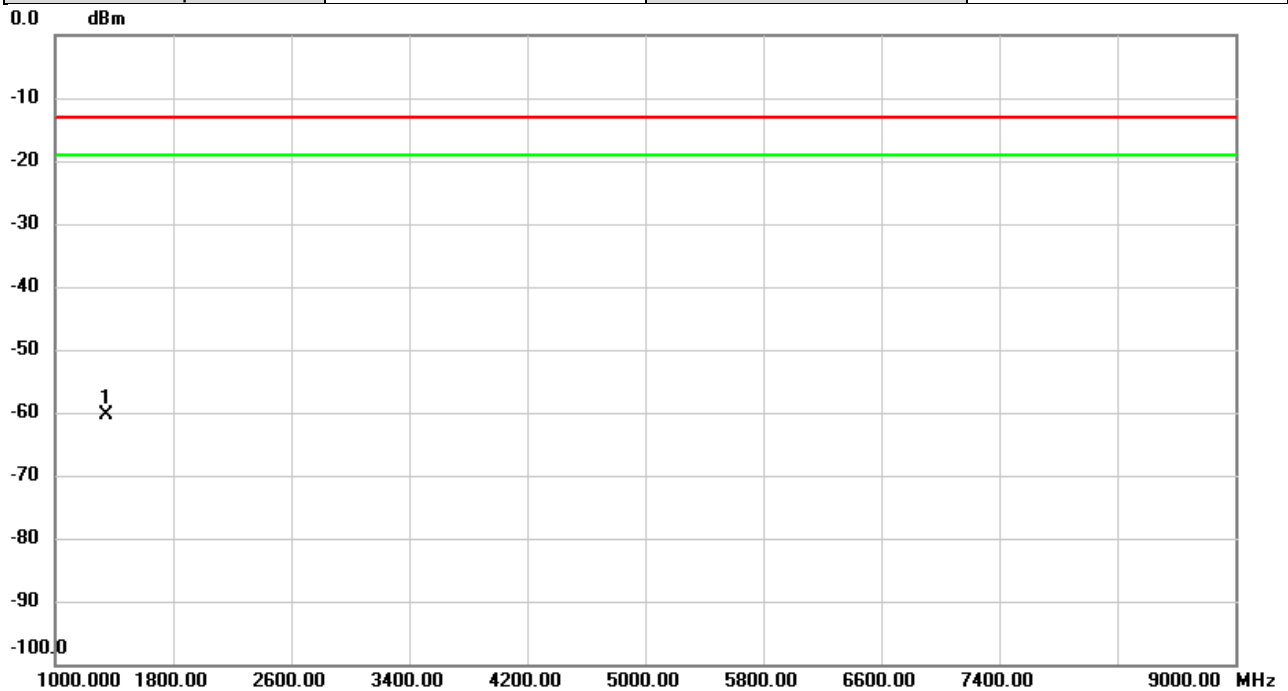


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1346.000	-65.13	4.72	-60.41	-13.00	-47.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133322	Polarization	Vertical
Temp	26°C	Hum.	54%

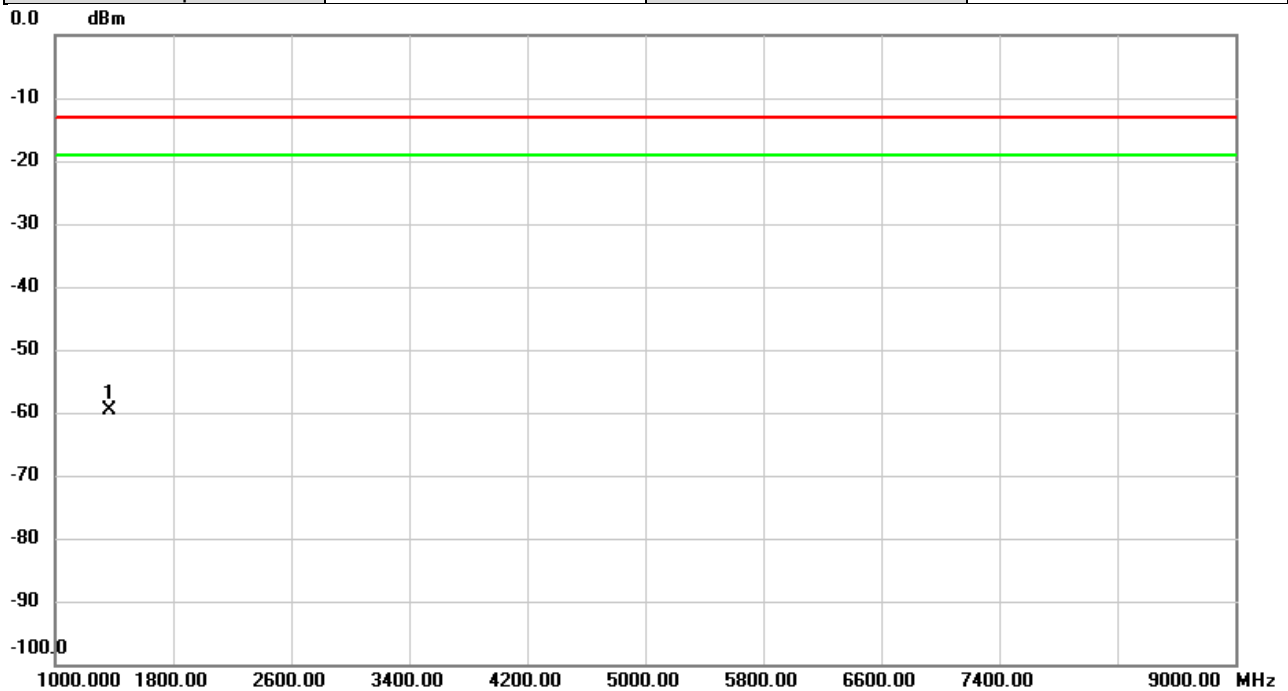


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1366.000	-64.34	4.76	-59.58	-13.00	-46.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133322	Polarization	Horizontal
Temp	26°C	Hum.	54%

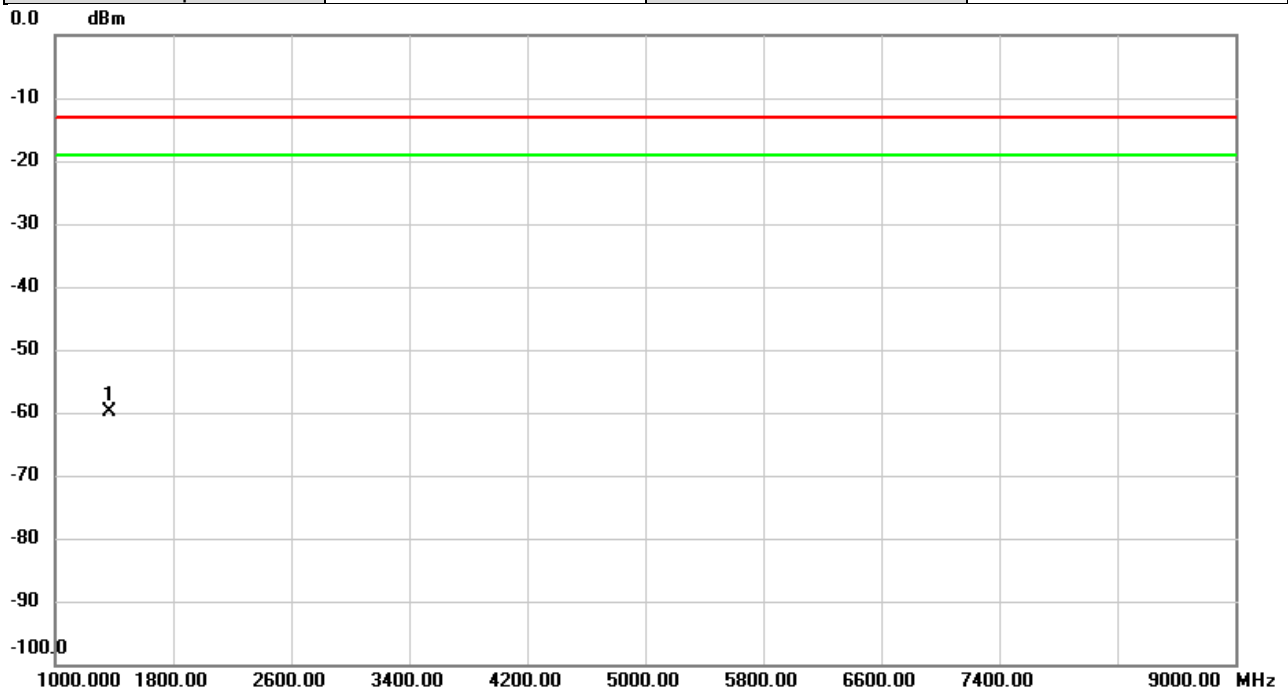


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1366.000	-64.40	4.63	-59.77	-13.00	-46.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133372	Polarization	Vertical
Temp	26°C	Hum.	54%

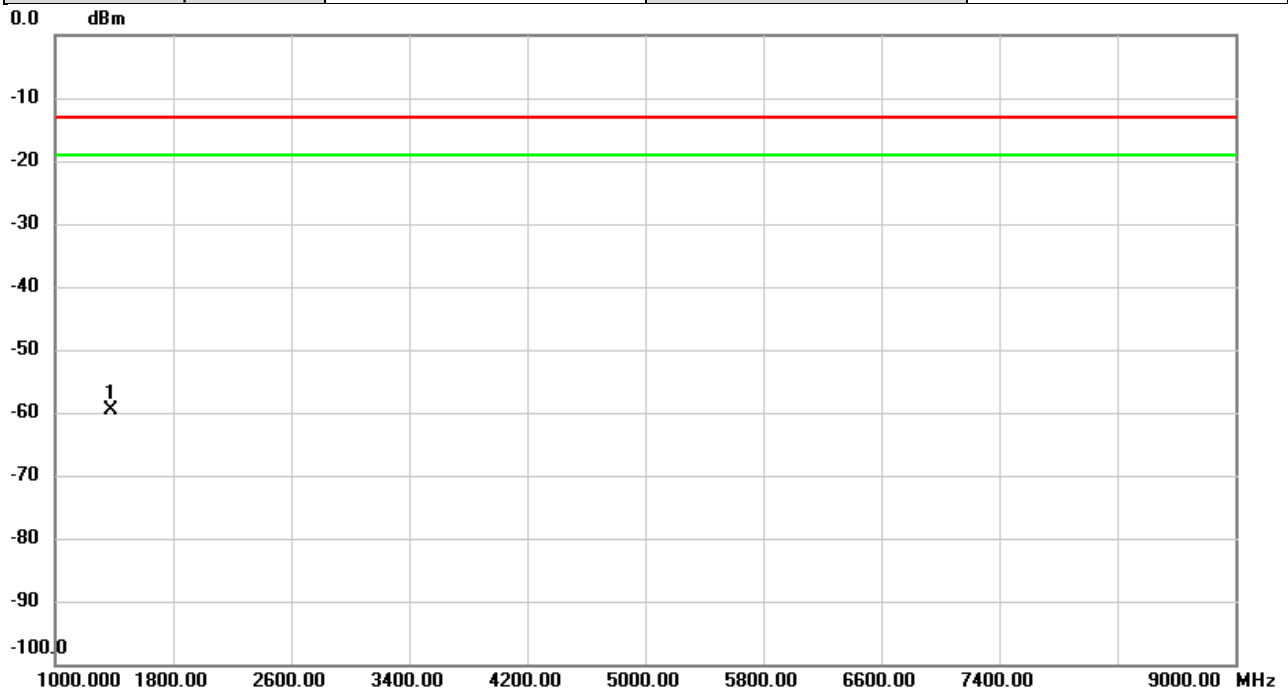


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1376.000	-64.52	4.82	-59.70	-13.00	-46.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 71	Test Date	2025/4/30
Test Channel	CH133372	Polarization	Horizontal
Temp	26°C	Hum.	54%

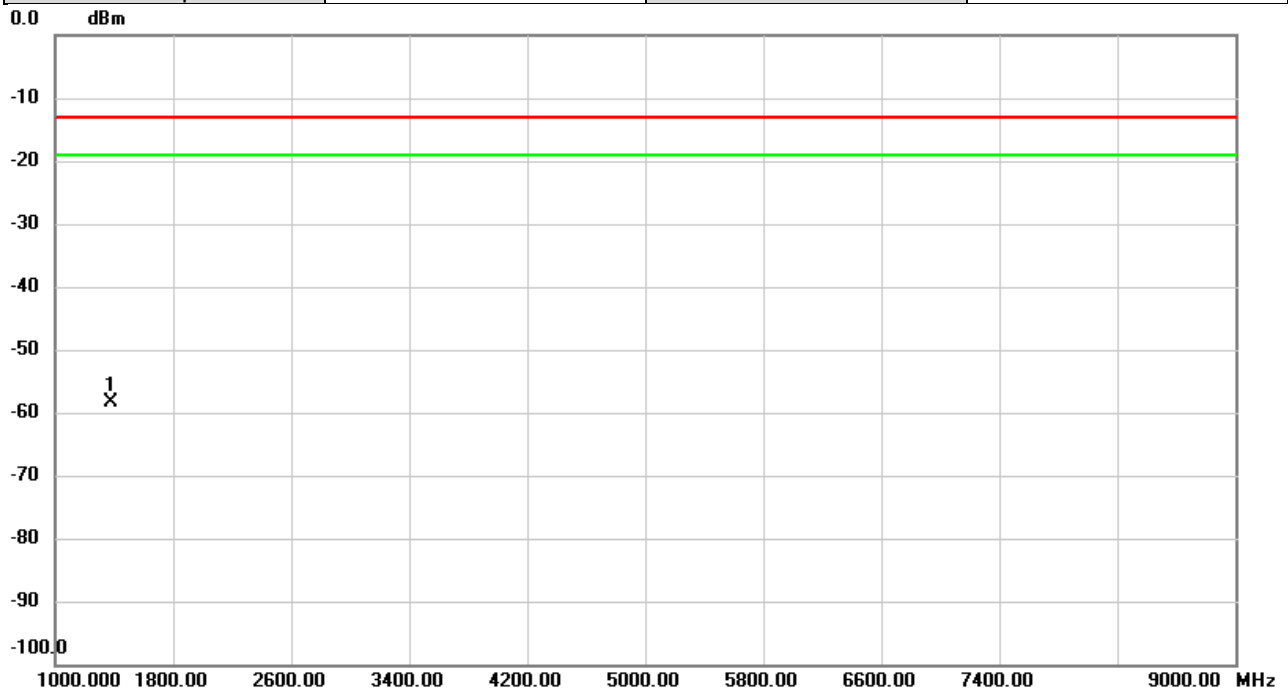


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1376.000	-62.92	4.59	-58.33	-13.00	-45.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/26
Test Channel	TX Low CH	Polarization	Vertical
Temp	22°C	Hum.	54%

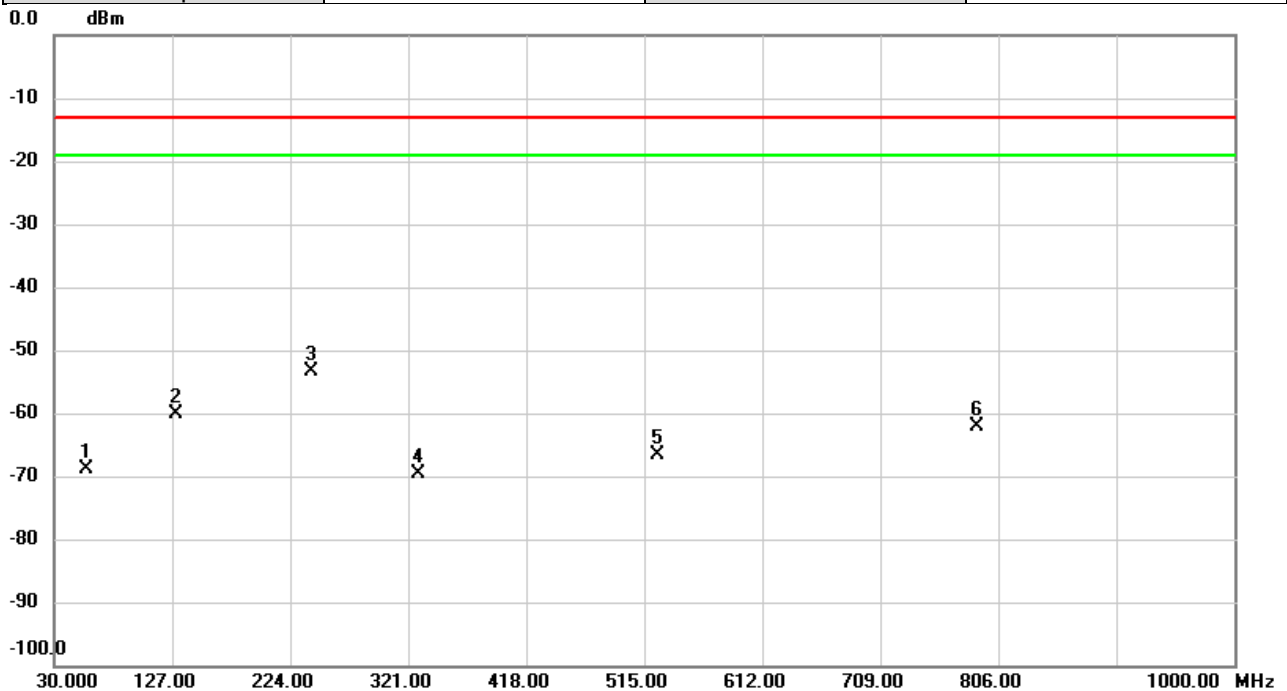


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.0307	-63.63	-5.17	-68.80	-13.00	-55.80	peak	
2		129.6190	-56.71	-3.48	-60.19	-13.00	-47.19	peak	
3	*	241.8480	-53.01	-0.35	-53.36	-13.00	-40.36	peak	
4		328.9863	-68.59	-0.95	-69.54	-13.00	-56.54	peak	
5		525.5082	-70.13	3.63	-66.50	-13.00	-53.50	peak	
6		788.2490	-67.99	5.99	-62.00	-13.00	-49.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/26
Test Channel	TX Low CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

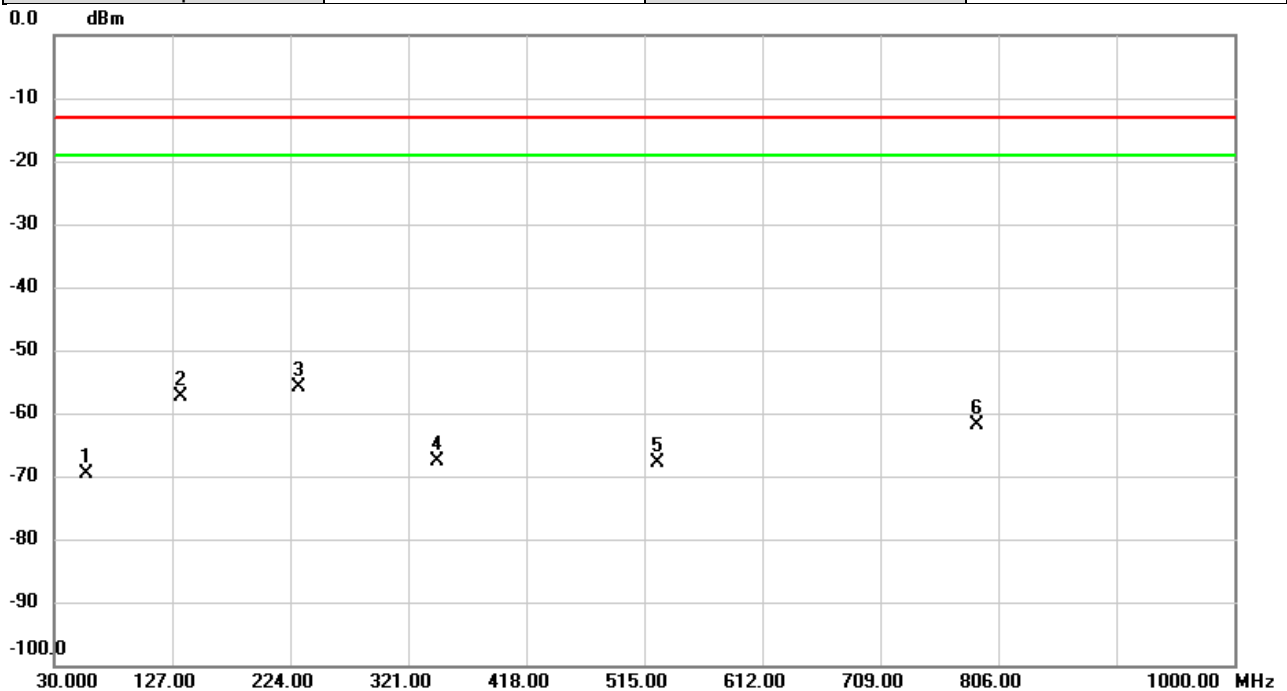


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.1900	-69.01	-0.59	-69.60	-13.00	-56.60	peak	
2		134.3396	-53.39	-4.03	-57.42	-13.00	-44.42	peak	
3	*	230.8546	-50.09	-5.83	-55.92	-13.00	-42.92	peak	
4		345.0883	-66.88	-0.76	-67.64	-13.00	-54.64	peak	
5		525.5082	-68.99	1.13	-67.86	-13.00	-54.86	peak	
6		788.2490	-67.98	6.06	-61.92	-13.00	-48.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

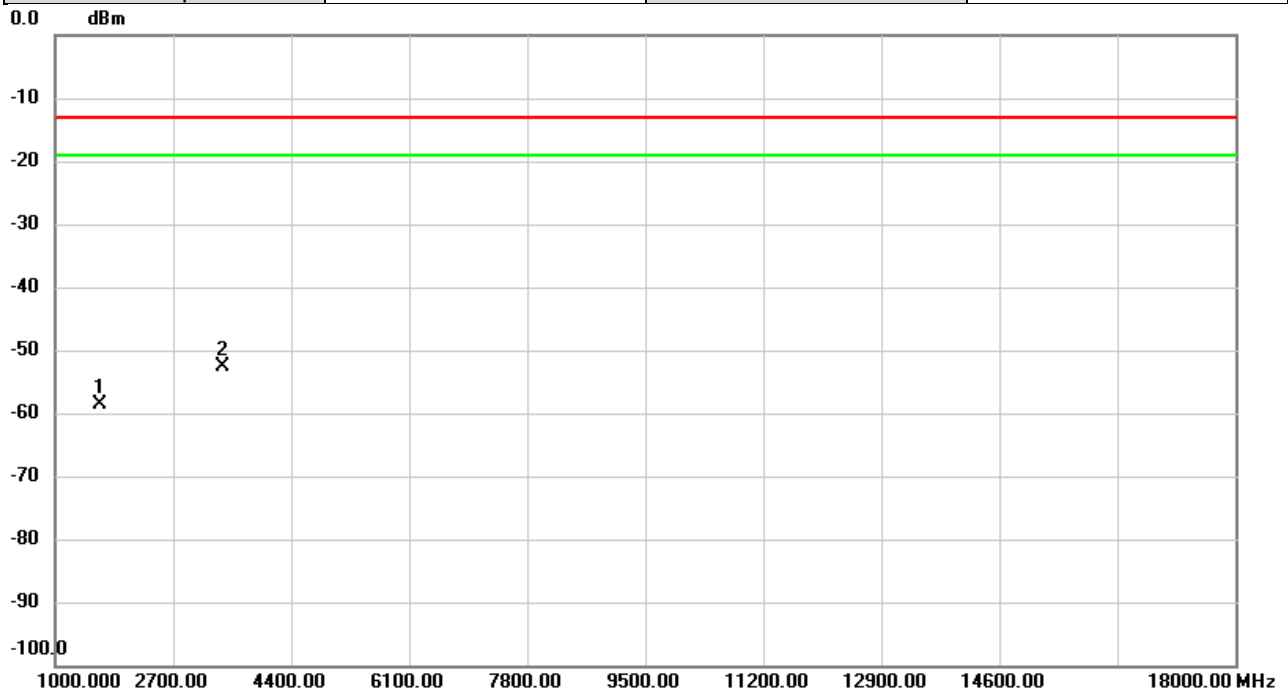


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-64.41	5.72	-58.69	-13.00	-45.69	peak	
2	*	3422.000	-62.79	10.07	-52.72	-13.00	-39.72	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

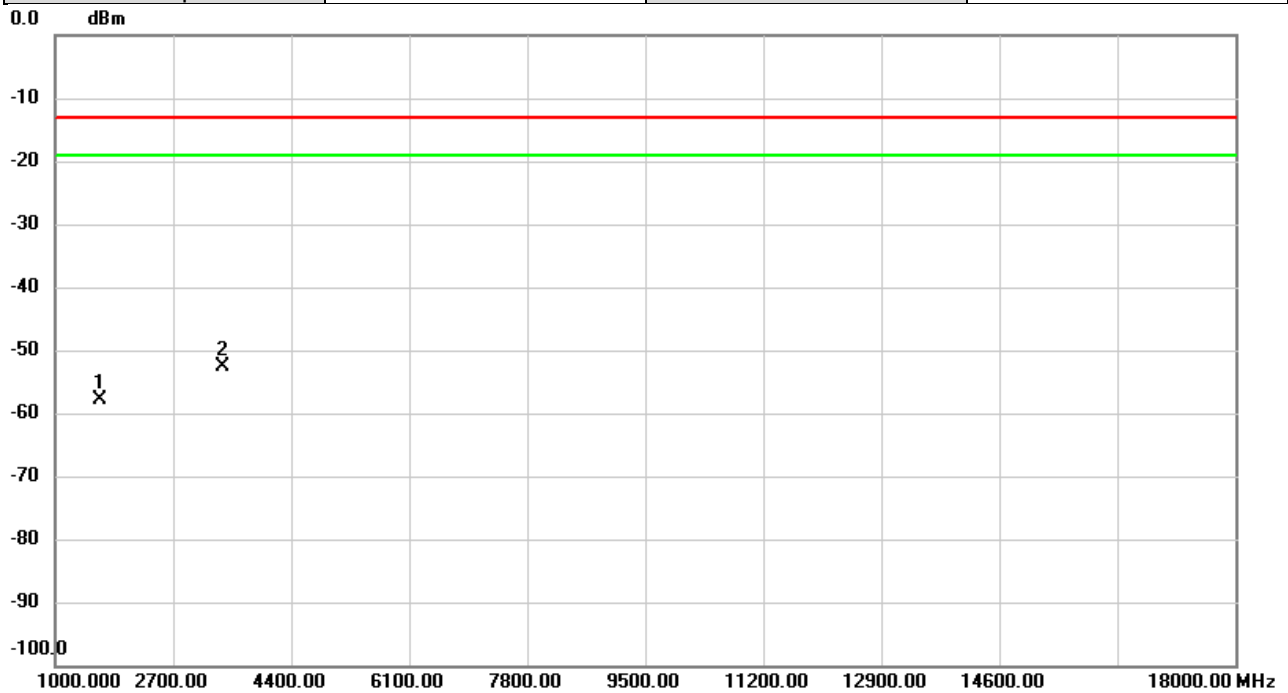


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-63.35	5.42	-57.93	-13.00	-44.93	peak	
2	*	3422.000	-62.25	9.71	-52.54	-13.00	-39.54	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_4A-5A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

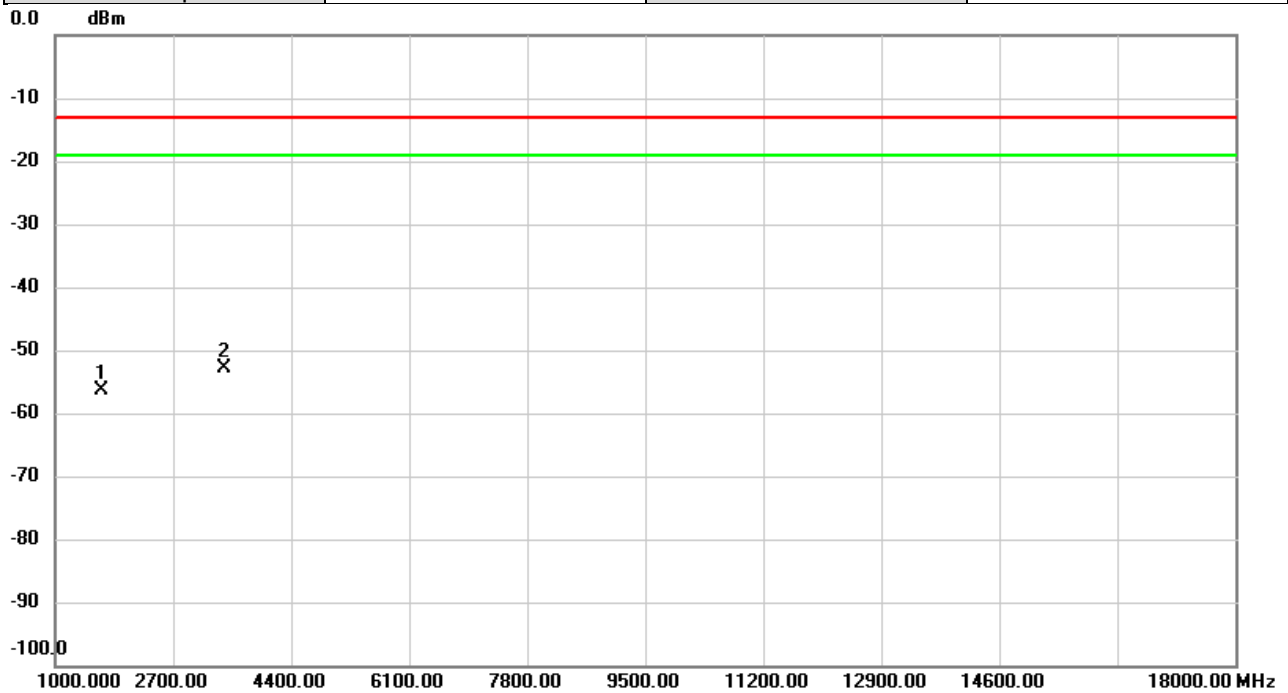


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1664.000	-62.18	5.75	-56.43	-13.00	-43.43	peak	
2	*	3447.000	-63.14	10.31	-52.83	-13.00	-39.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_4A-5A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

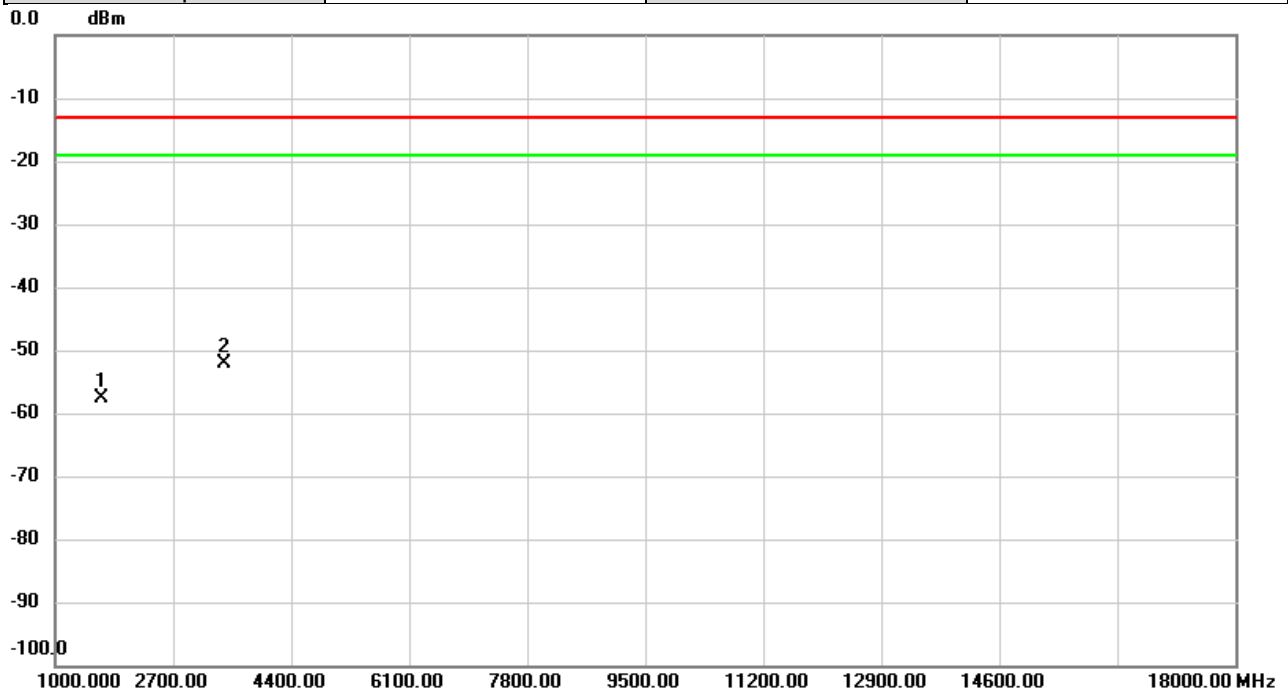


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1664.000	-63.12	5.46	-57.66	-13.00	-44.66	peak	
2	*	3447.000	-62.16	10.05	-52.11	-13.00	-39.11	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

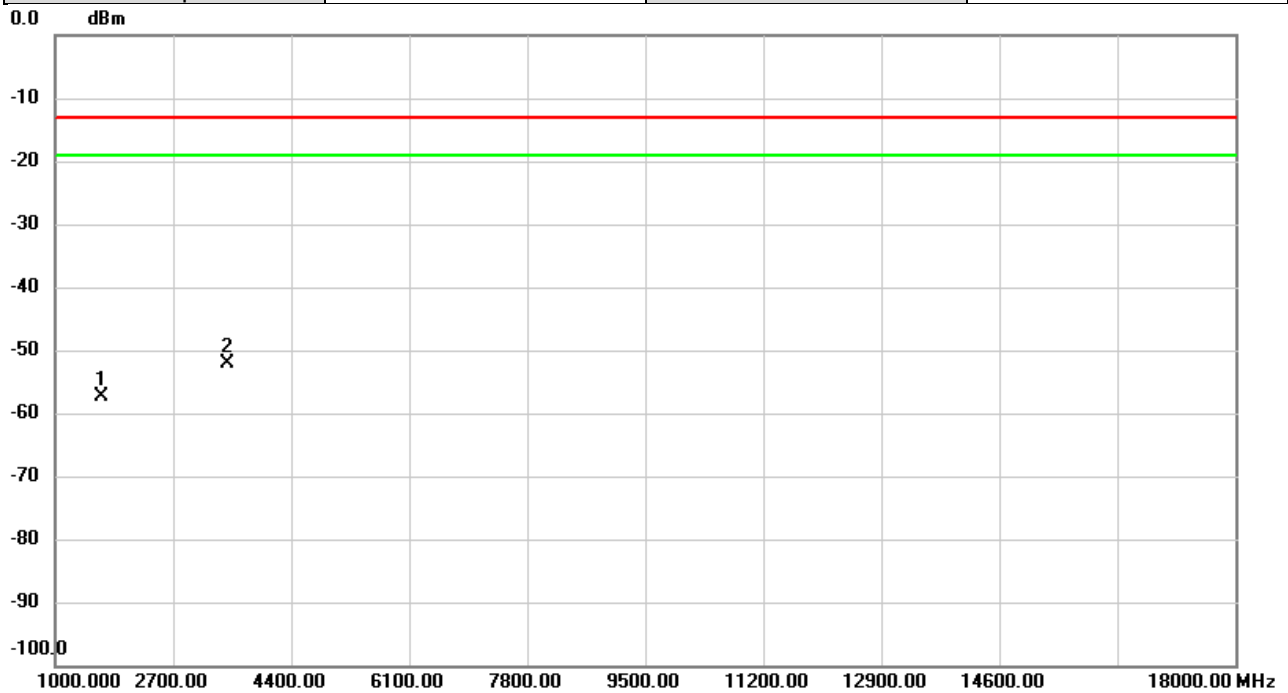


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1679.000	-63.05	5.77	-57.28	-13.00	-44.28	peak	
2	*	3472.000	-62.30	10.26	-52.04	-13.00	-39.04	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-5A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

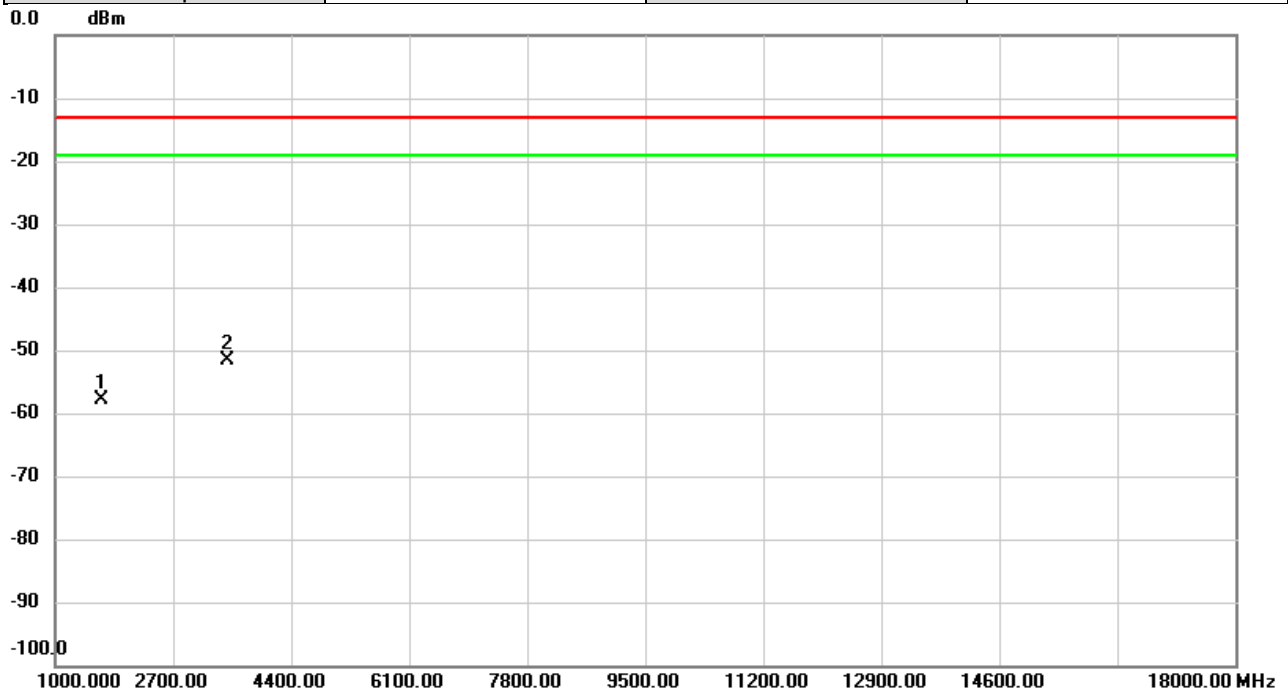


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1679.000	-63.28	5.50	-57.78	-13.00	-44.78	peak	
2	*	3472.000	-61.68	10.02	-51.66	-13.00	-38.66	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

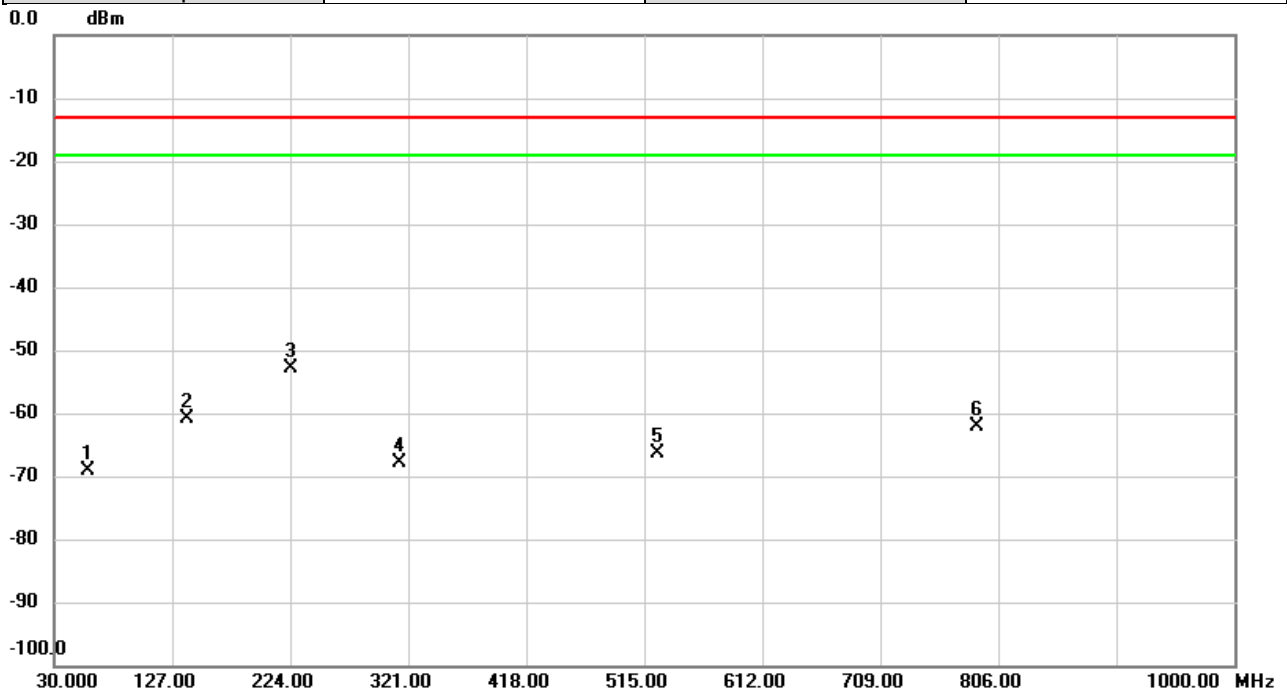


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		57.5156	-63.80	-5.24	-69.04	-13.00	-56.04	peak	
2		138.7370	-59.31	-1.49	-60.80	-13.00	-47.80	peak	
3	*	224.1293	-51.49	-1.28	-52.77	-13.00	-39.77	peak	
4		313.4985	-66.71	-1.10	-67.81	-13.00	-54.81	peak	
5		525.5082	-70.04	3.63	-66.41	-13.00	-53.41	peak	
6		788.2490	-68.19	5.99	-62.20	-13.00	-49.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

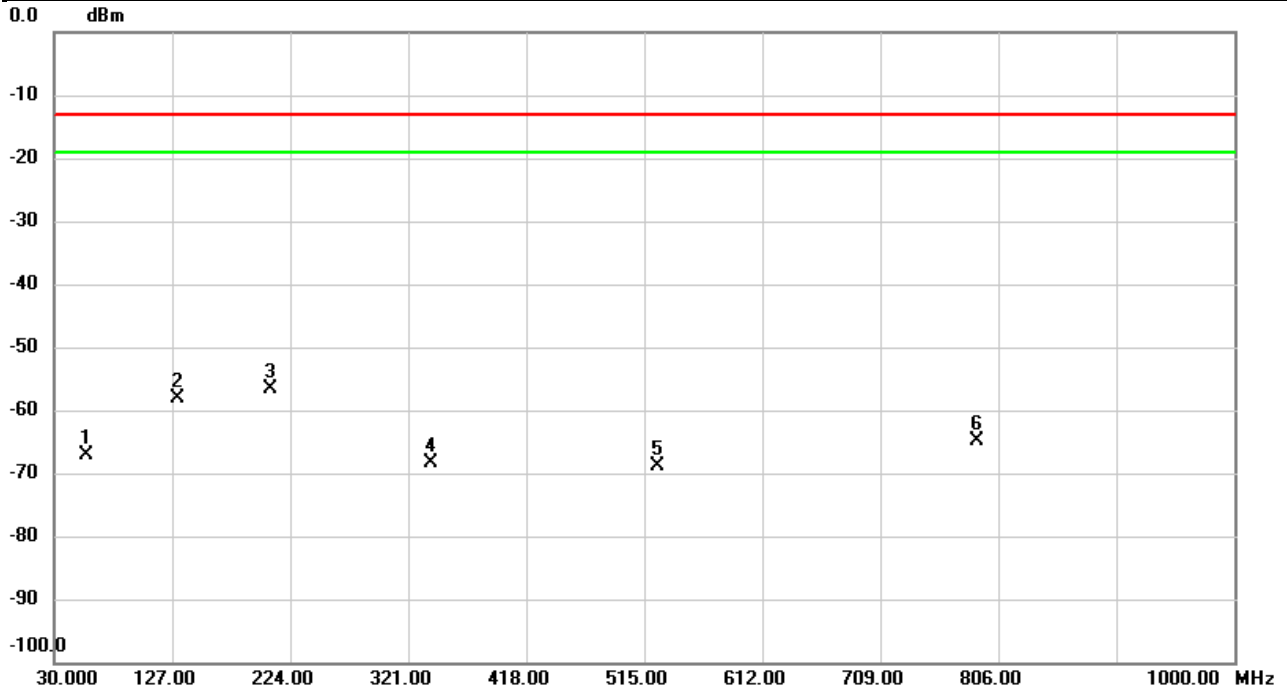


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		56.8690	-66.28	-0.83	-67.11	-13.00	-54.11	peak	
2		131.0093	-53.87	-4.33	-58.20	-13.00	-45.20	peak	
3	*	207.7040	-49.28	-7.38	-56.66	-13.00	-43.66	peak	
4		339.6886	-67.10	-1.15	-68.25	-13.00	-55.25	peak	
5		525.5082	-69.91	1.13	-68.78	-13.00	-55.78	peak	
6		788.2490	-70.82	6.06	-64.76	-13.00	-51.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

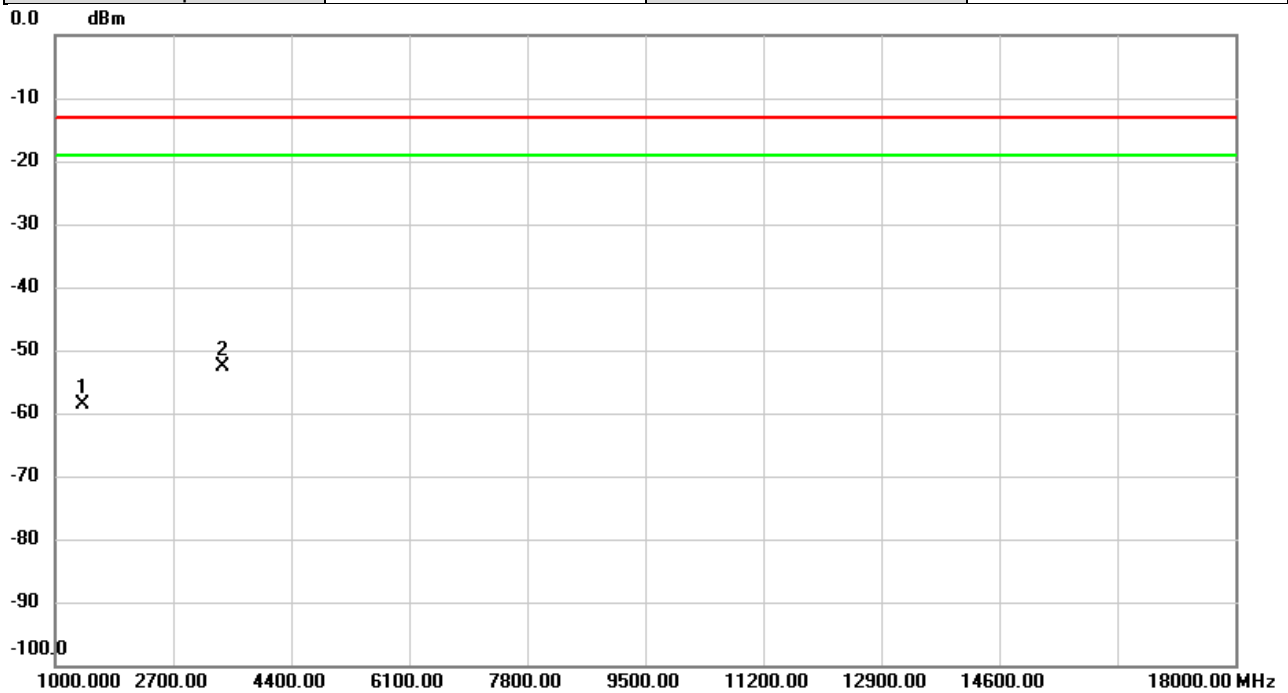


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-63.44	4.93	-58.51	-13.00	-45.51	peak	
2	*	3422.000	-62.62	10.07	-52.55	-13.00	-39.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

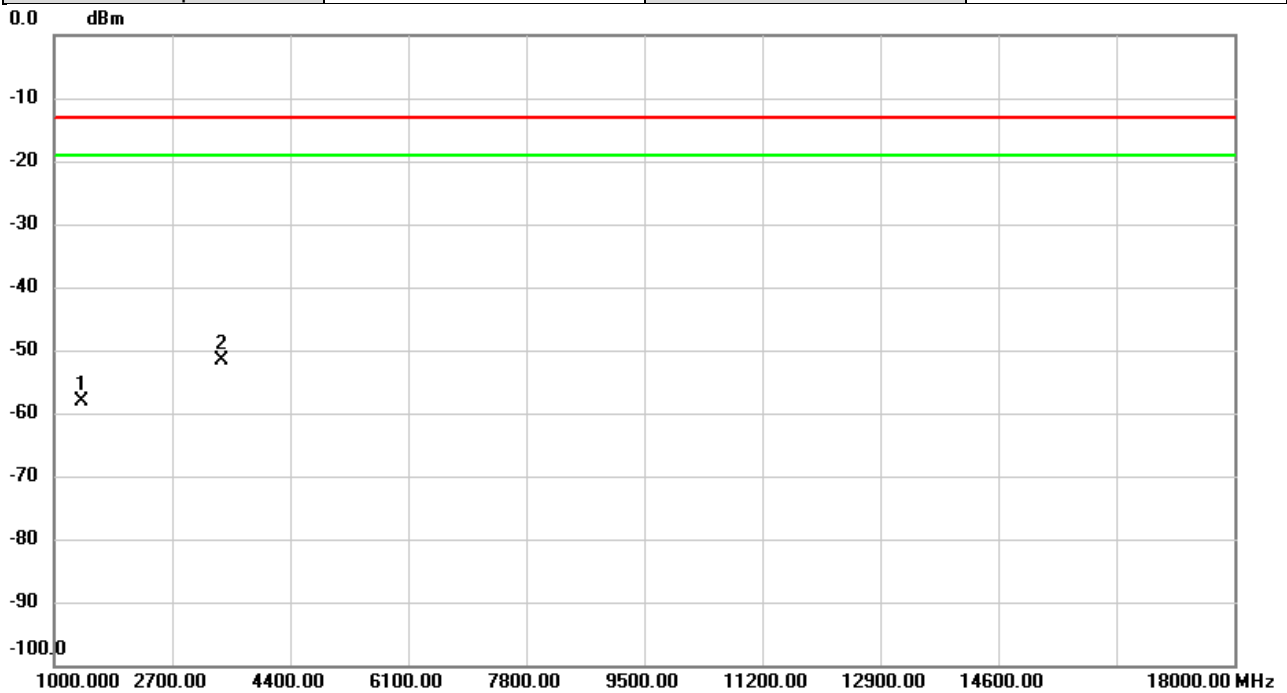


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-62.62	4.50	-58.12	-13.00	-45.12	peak	
2	*	3422.000	-61.26	9.71	-51.55	-13.00	-38.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

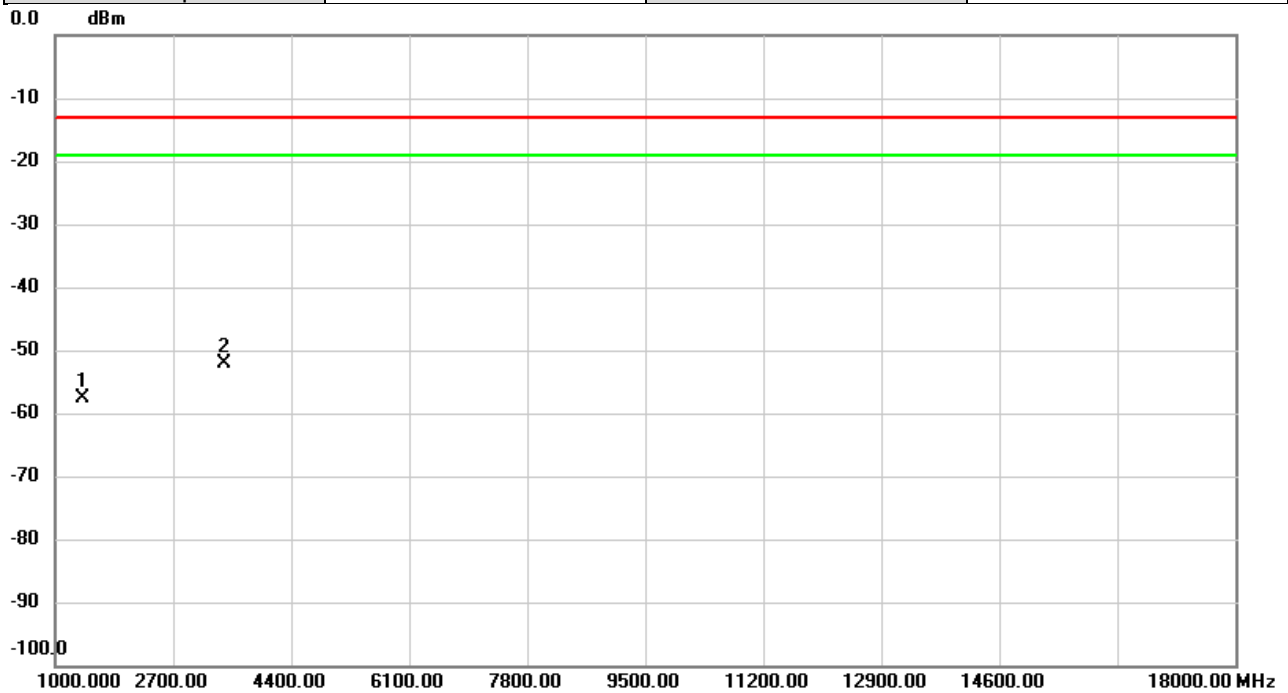


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-62.49	4.91	-57.58	-13.00	-44.58	peak	
2	*	3447.000	-62.39	10.31	-52.08	-13.00	-39.08	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

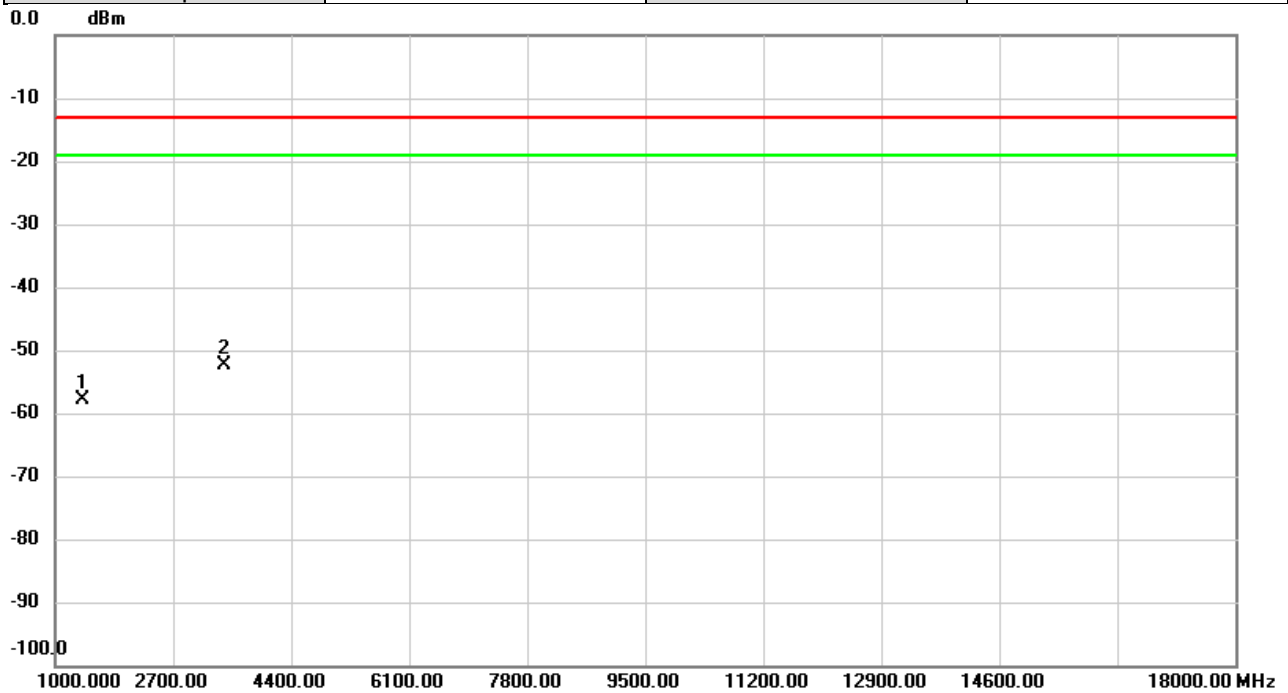


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-62.31	4.48	-57.83	-13.00	-44.83	peak	
2	*	3447.000	-62.33	10.05	-52.28	-13.00	-39.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

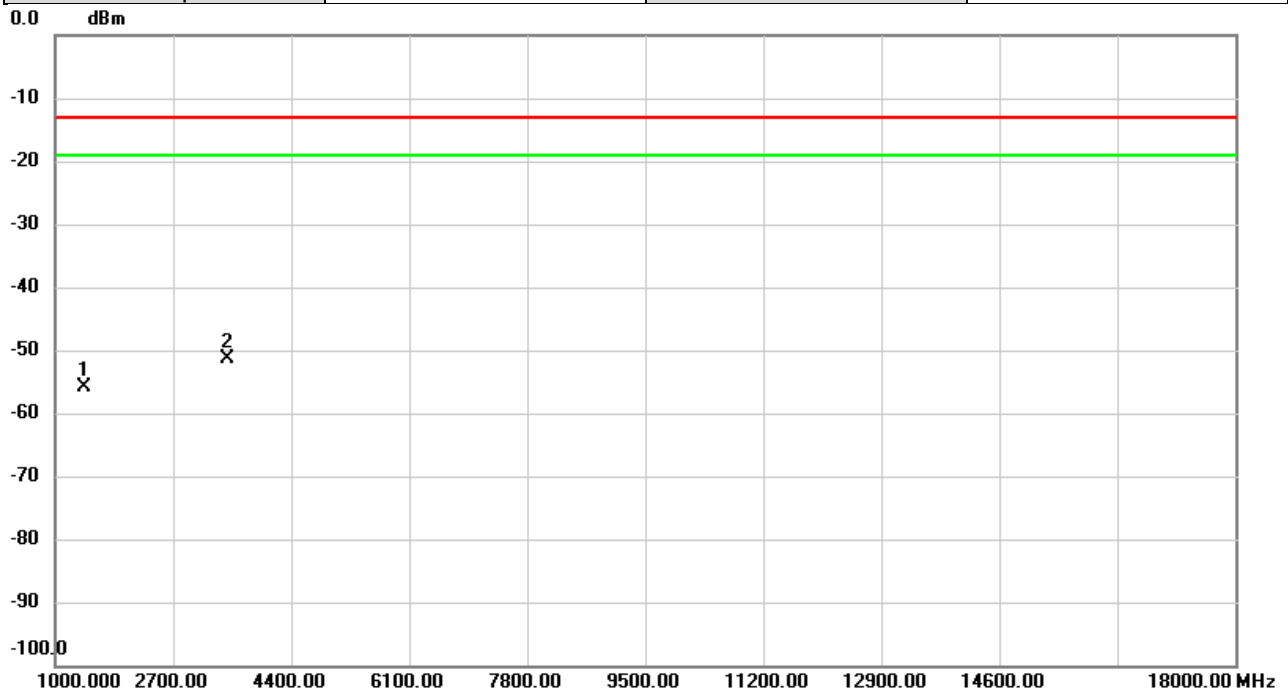


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-60.73	4.89	-55.84	-13.00	-42.84	peak	
2	*	3472.000	-61.68	10.26	-51.42	-13.00	-38.42	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-12A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

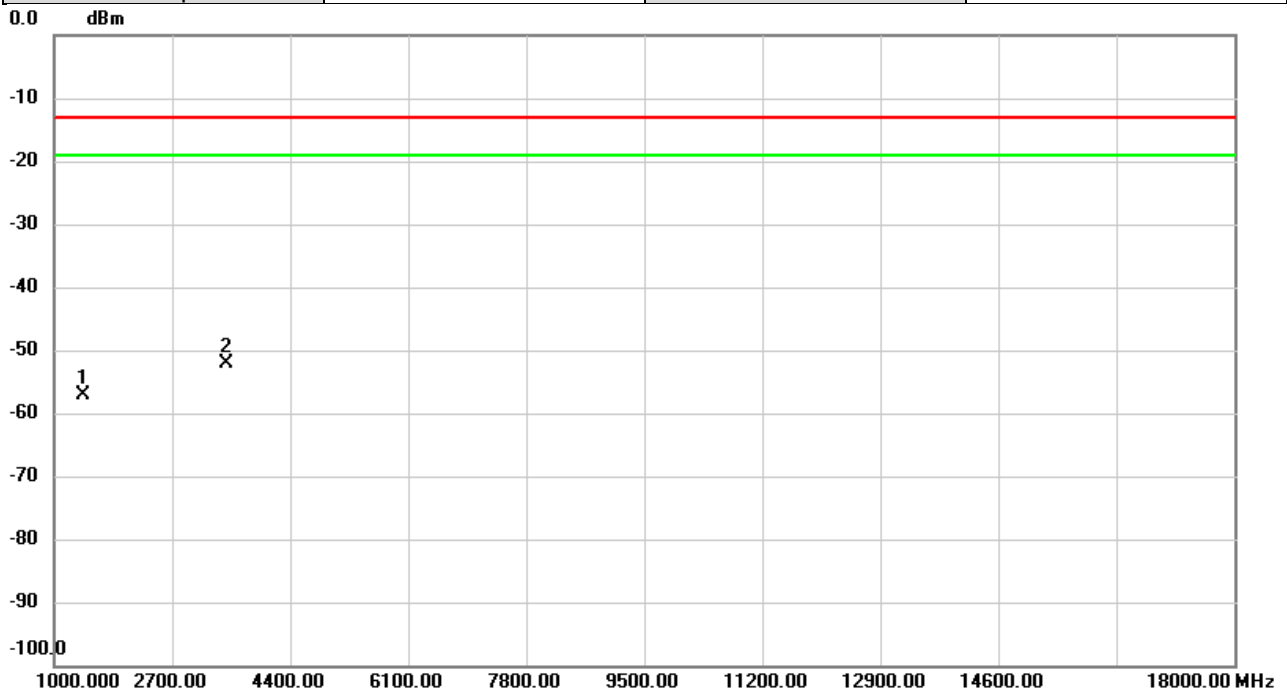


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-61.53	4.45	-57.08	-13.00	-44.08	peak	
2	*	3472.000	-62.13	10.02	-52.11	-13.00	-39.11	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

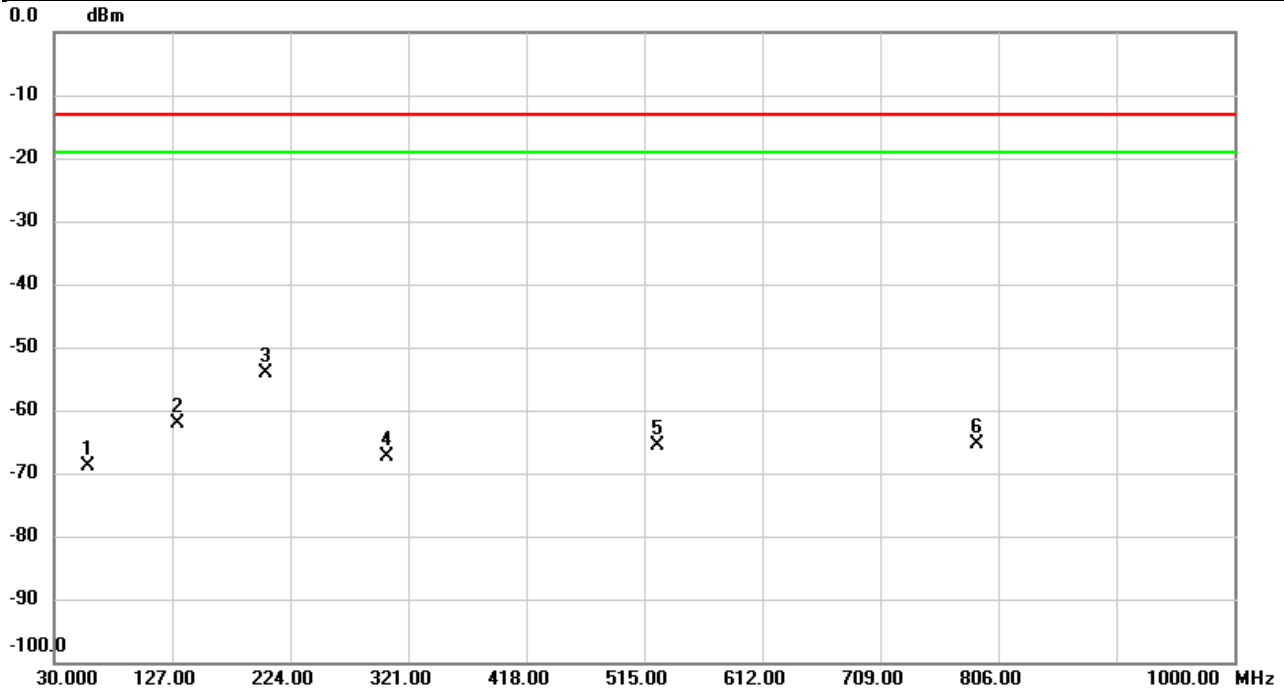


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		57.4833	-63.65	-5.24	-68.89	-13.00	-55.89	peak	
2		130.9770	-58.82	-3.20	-62.02	-13.00	-49.02	peak	
3	*	203.6947	-52.84	-1.24	-54.08	-13.00	-41.08	peak	
4		303.0550	-66.29	-1.20	-67.49	-13.00	-54.49	peak	
5		525.5082	-69.22	3.63	-65.59	-13.00	-52.59	peak	
6		788.2490	-71.31	5.99	-65.32	-13.00	-52.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

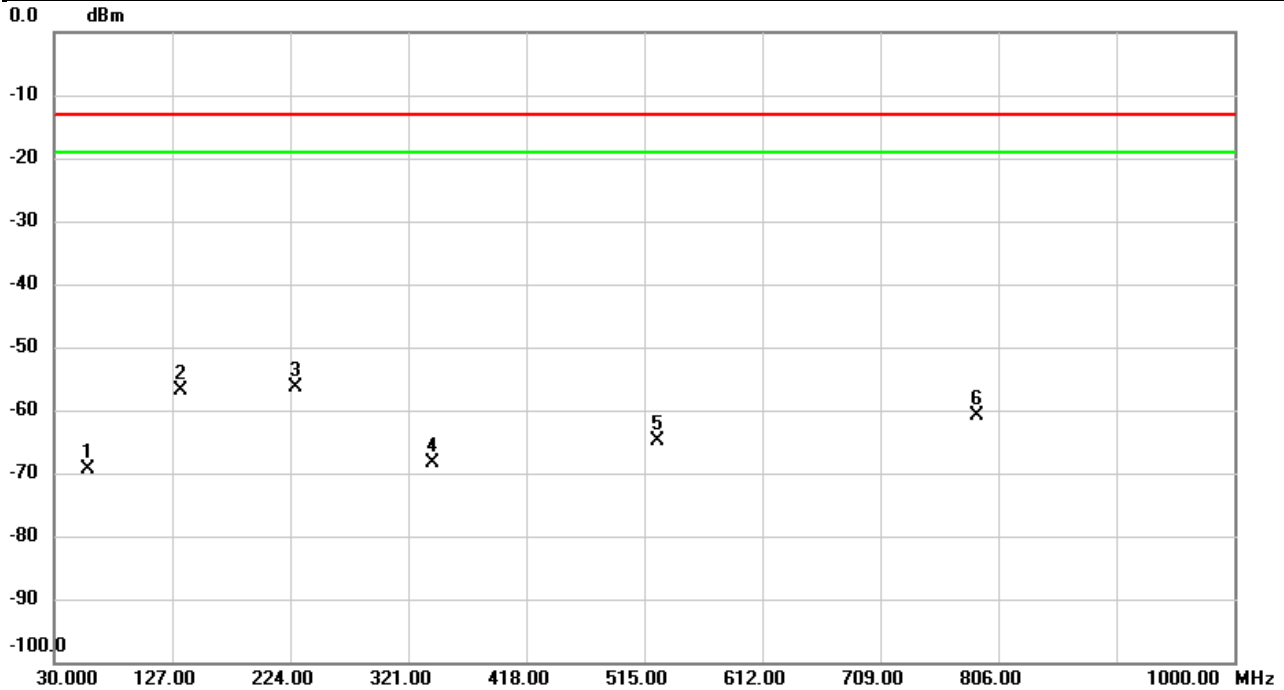


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.9683	-68.27	-1.22	-69.49	-13.00	-56.49	peak	
2		134.2750	-52.95	-4.04	-56.99	-13.00	-43.99	peak	
3	*	228.6560	-50.48	-5.97	-56.45	-13.00	-43.45	peak	
4		341.6286	-67.45	-1.01	-68.46	-13.00	-55.46	peak	
5		525.5082	-65.93	1.13	-64.80	-13.00	-51.80	peak	
6		788.2490	-66.84	6.06	-60.78	-13.00	-47.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

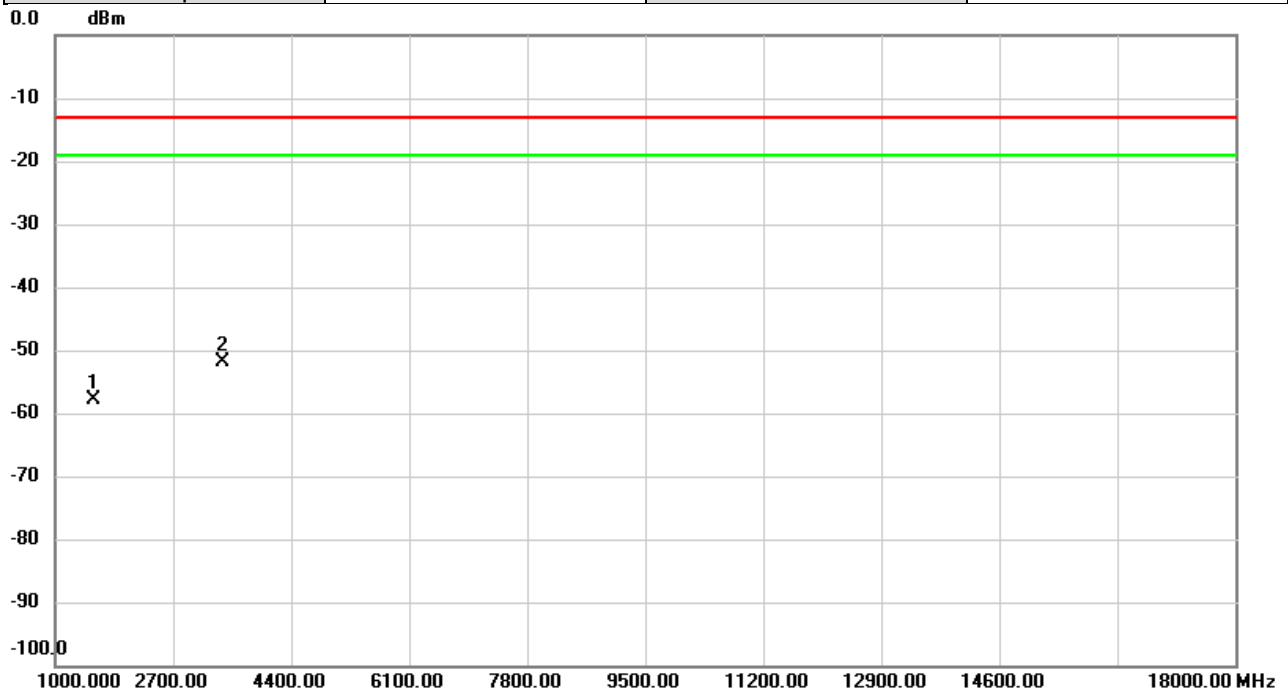


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.47	4.56	-57.91	-13.00	-44.91	peak	
2	*	3422.000	-62.05	10.07	-51.98	-13.00	-38.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

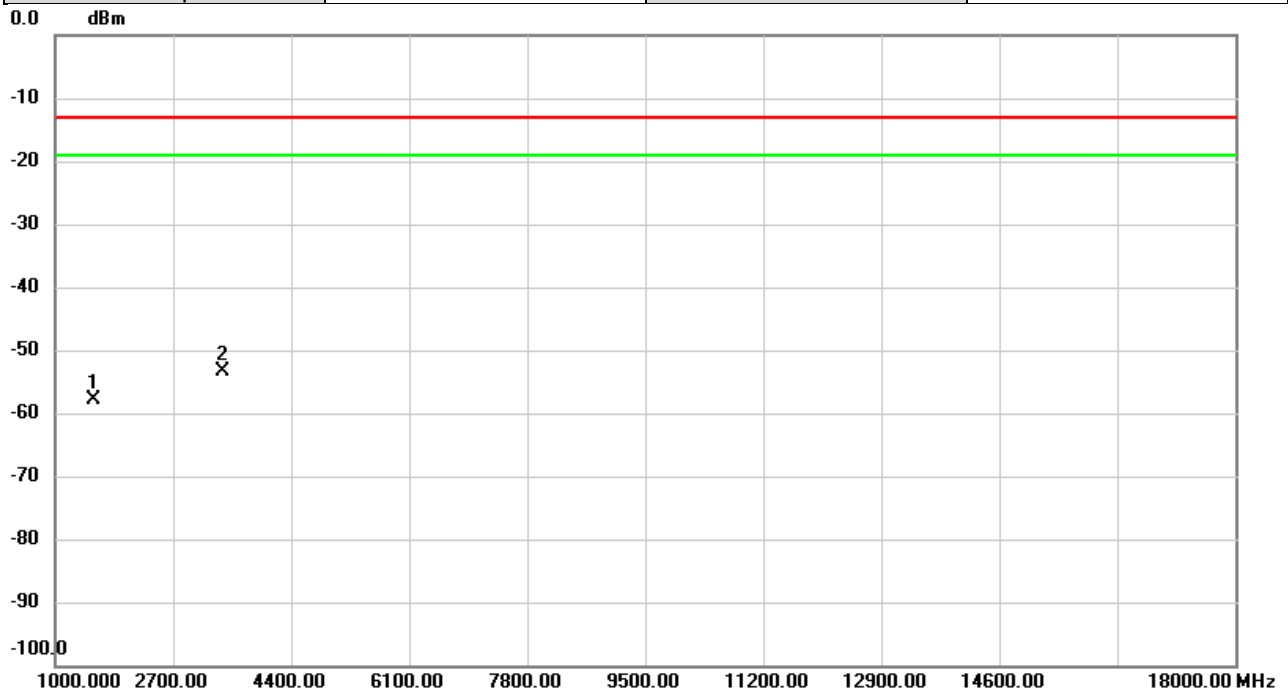


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.15	4.39	-57.76	-13.00	-44.76	peak	
2	*	3422.000	-63.09	9.71	-53.38	-13.00	-40.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

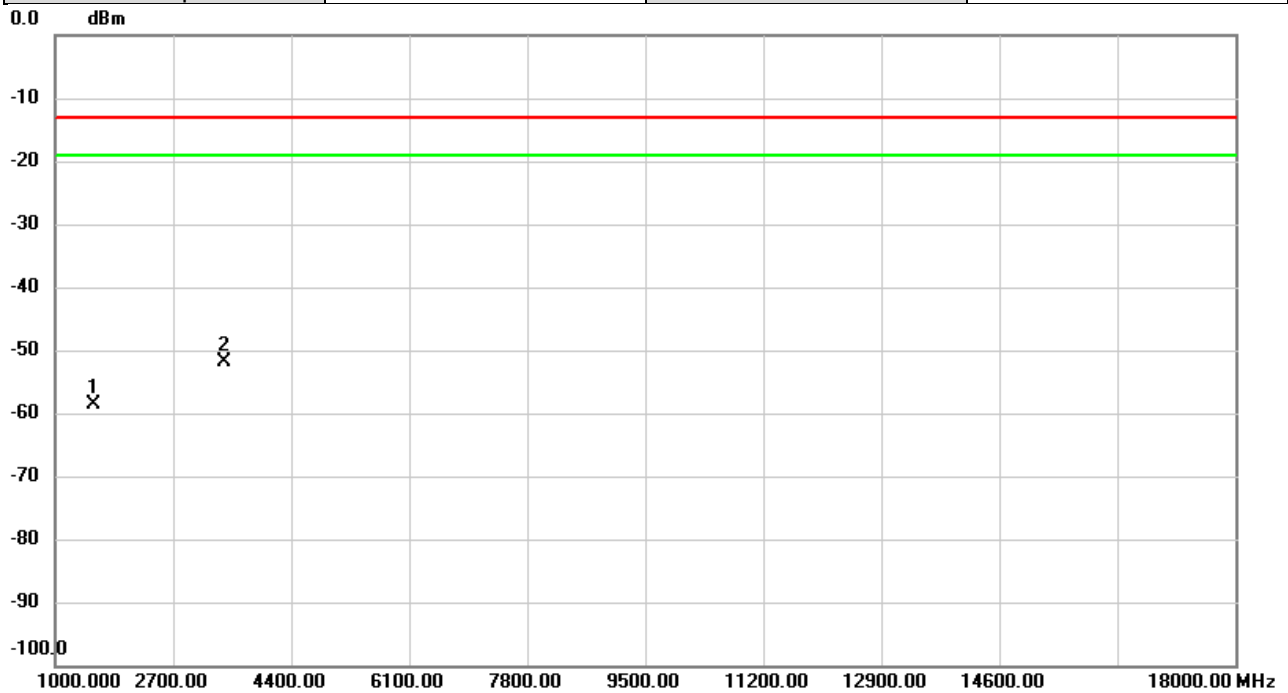


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-63.11	4.60	-58.51	-13.00	-45.51	peak	
2	*	3447.000	-62.06	10.31	-51.75	-13.00	-38.75	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

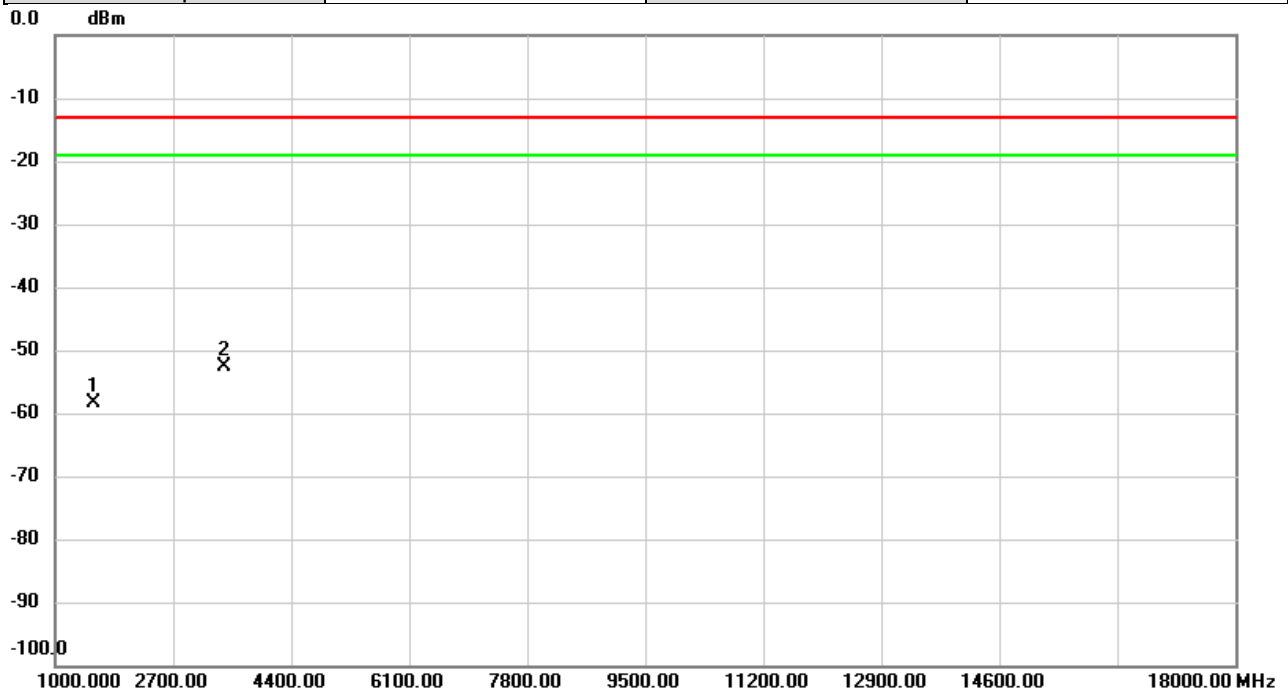


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-62.72	4.44	-58.28	-13.00	-45.28	peak	
2	*	3447.000	-62.61	10.05	-52.56	-13.00	-39.56	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

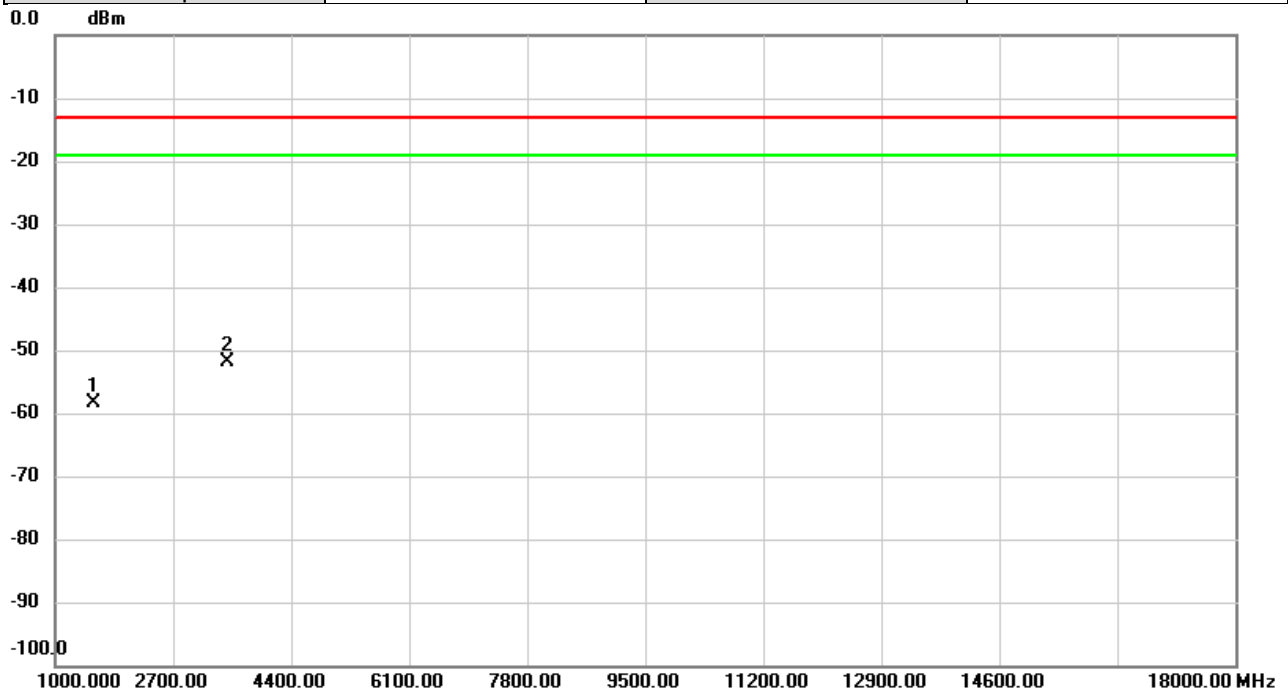


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-62.99	4.64	-58.35	-13.00	-45.35	peak	
2	*	3472.000	-62.07	10.26	-51.81	-13.00	-38.81	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 4A-13A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

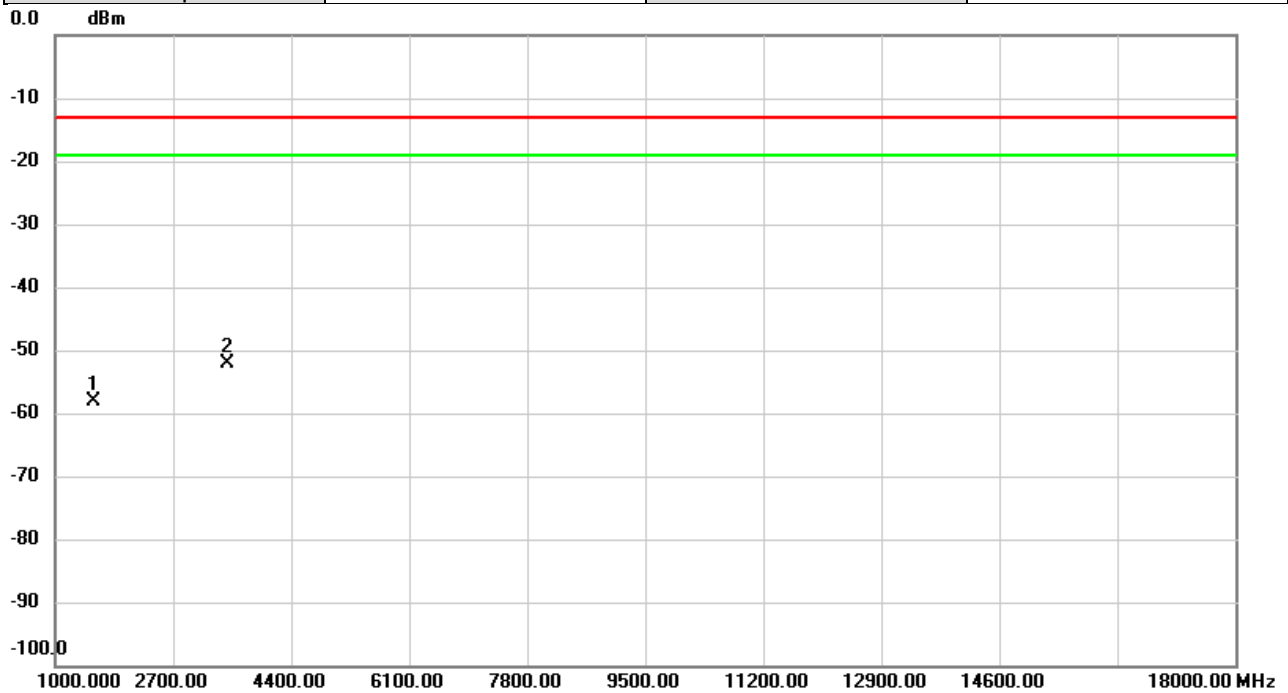


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-62.50	4.49	-58.01	-13.00	-45.01	peak	
2	*	3472.000	-62.12	10.02	-52.10	-13.00	-39.10	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

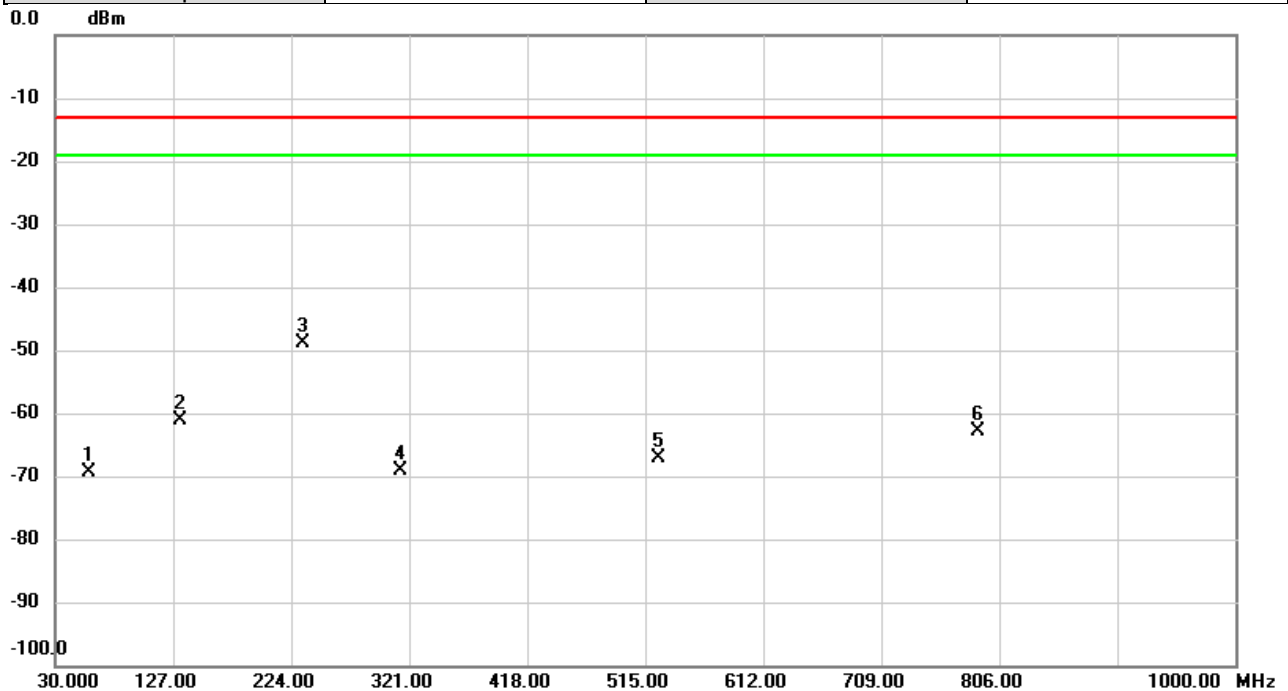


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.4833	-64.11	-5.24	-69.35	-13.00	-56.35	peak	
2		133.4666	-58.40	-2.65	-61.05	-13.00	-48.05	peak	
3	*	234.3143	-48.50	-0.48	-48.98	-13.00	-35.98	peak	
4		314.3716	-68.14	-1.09	-69.23	-13.00	-56.23	peak	
5		525.4760	-70.78	3.63	-67.15	-13.00	-54.15	peak	
6		788.2490	-68.96	5.99	-62.97	-13.00	-49.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

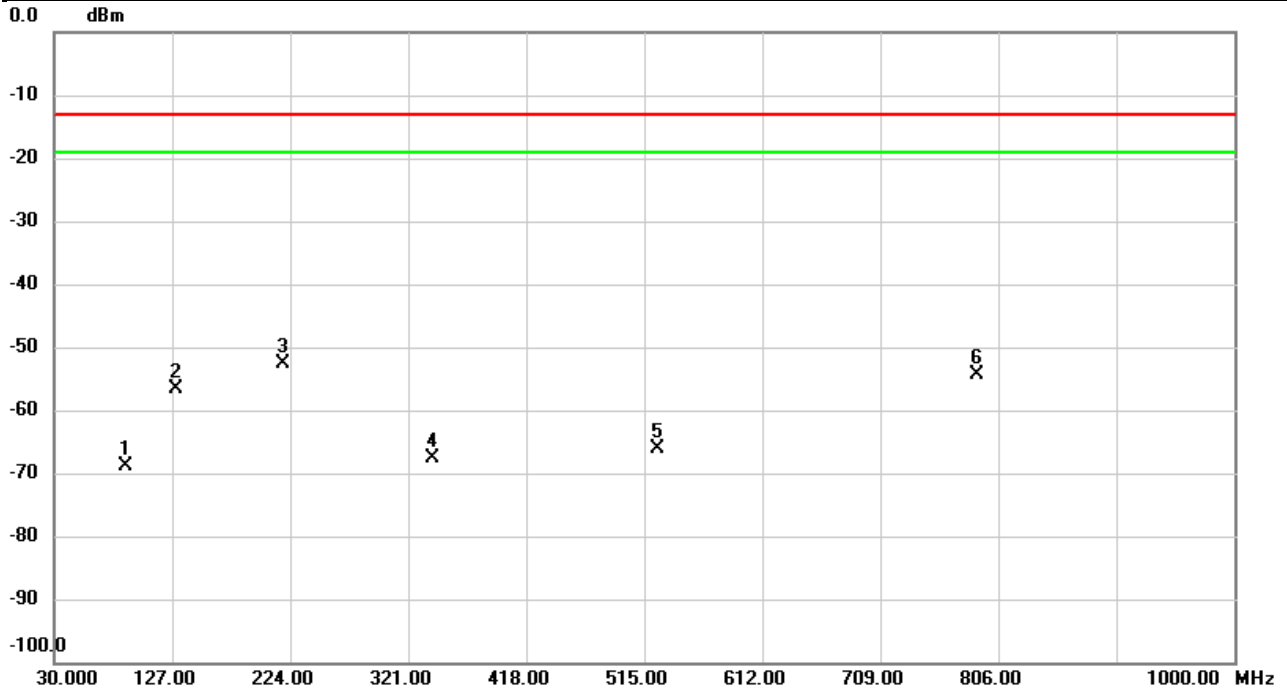


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.2970	-62.75	-6.17	-68.92	-13.00	-55.92	peak	
2		130.8476	-52.37	-4.34	-56.71	-13.00	-43.71	peak	
3	*	218.6973	-45.62	-7.04	-52.66	-13.00	-39.66	peak	
4		341.6286	-66.69	-1.01	-67.70	-13.00	-54.70	peak	
5		525.5082	-67.36	1.13	-66.23	-13.00	-53.23	peak	
6		788.2490	-60.39	6.06	-54.33	-13.00	-41.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

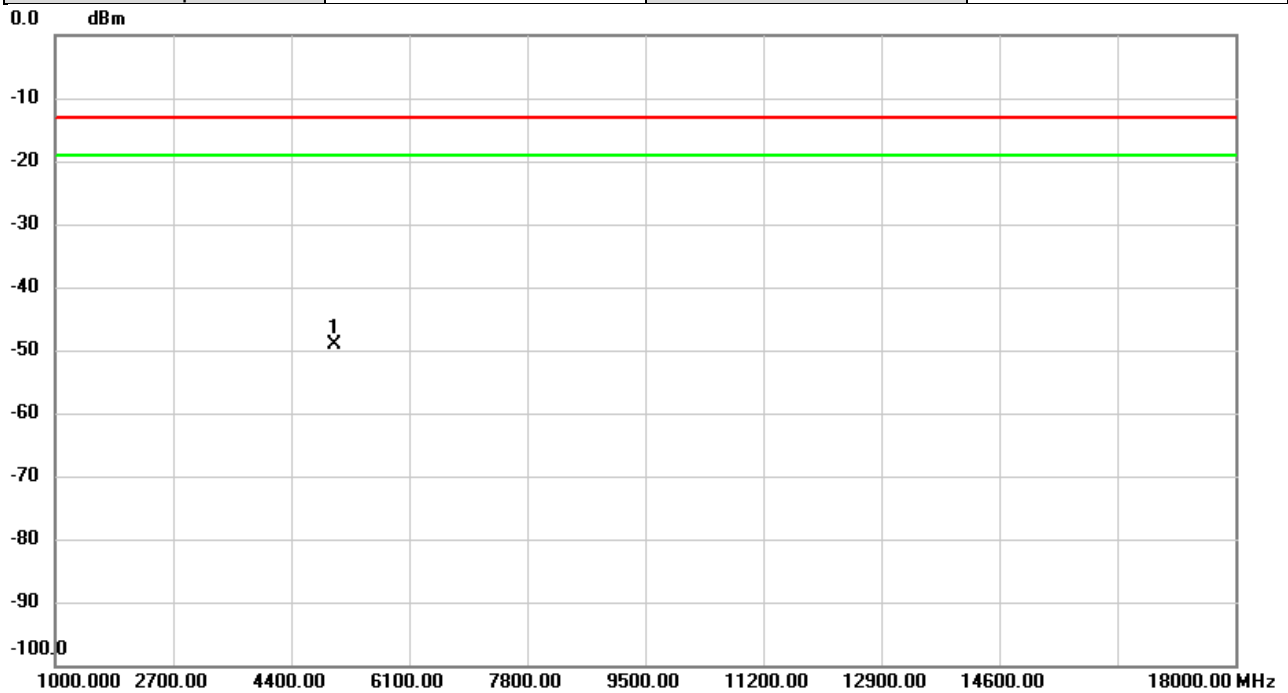


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5020.000	-62.87	13.81	-49.06	-13.00	-36.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

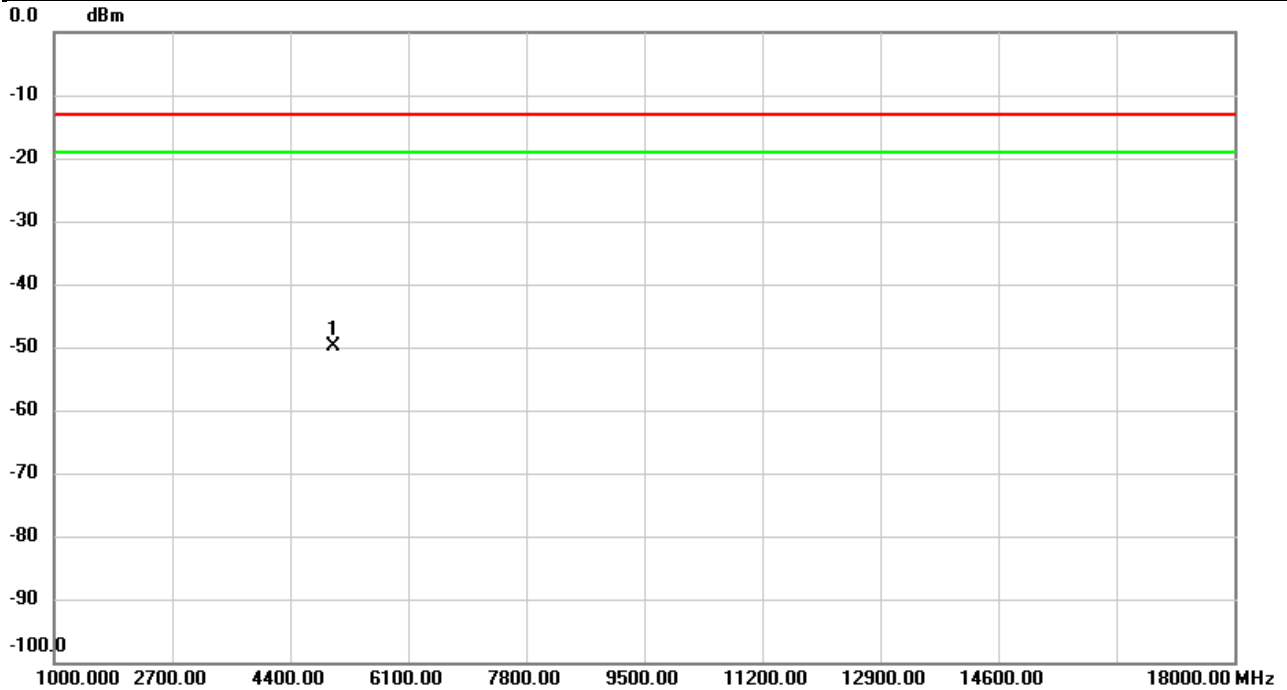


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5020.000	-63.45	13.59	-49.86	-13.00	-36.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

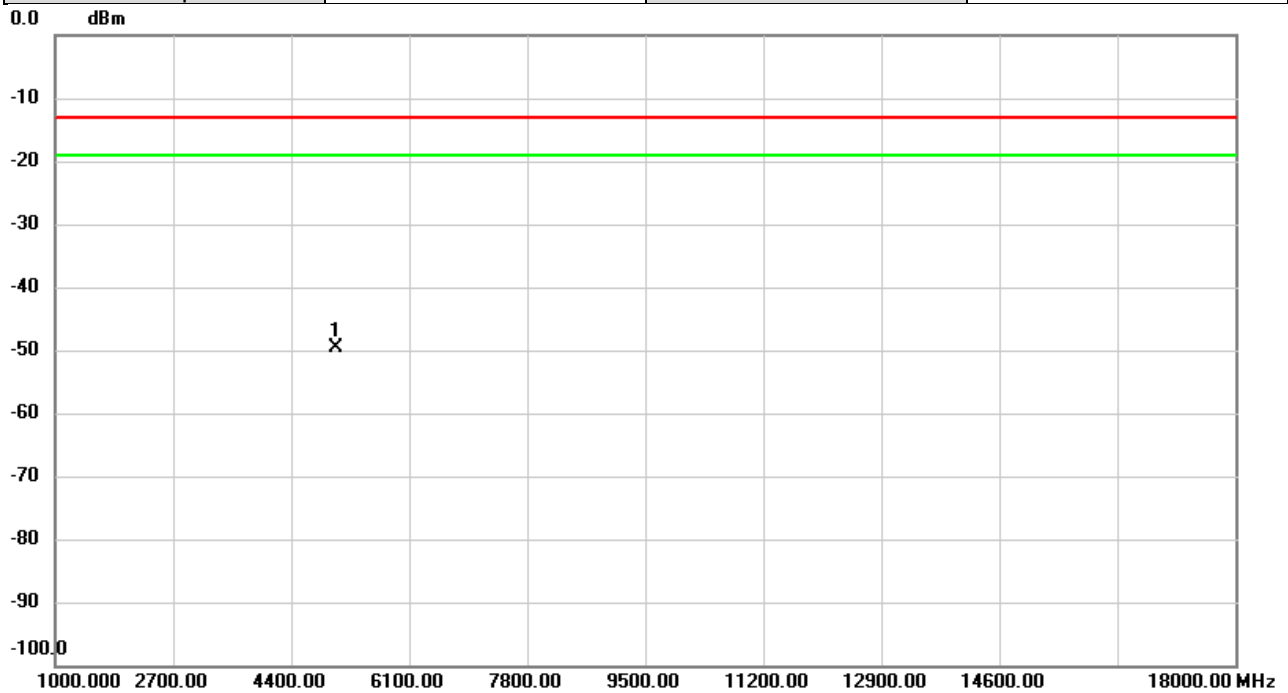


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5050.000	-63.85	14.21	-49.64	-13.00	-36.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

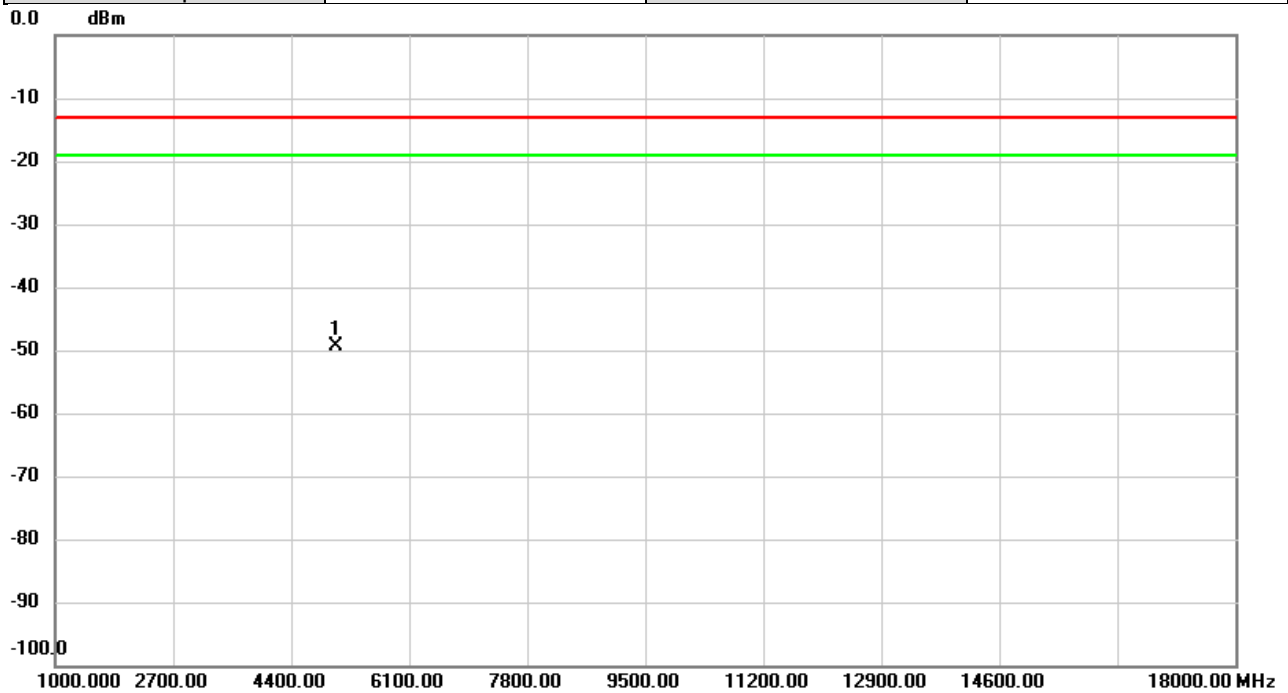


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5050.000	-63.52	14.06	-49.46	-13.00	-36.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

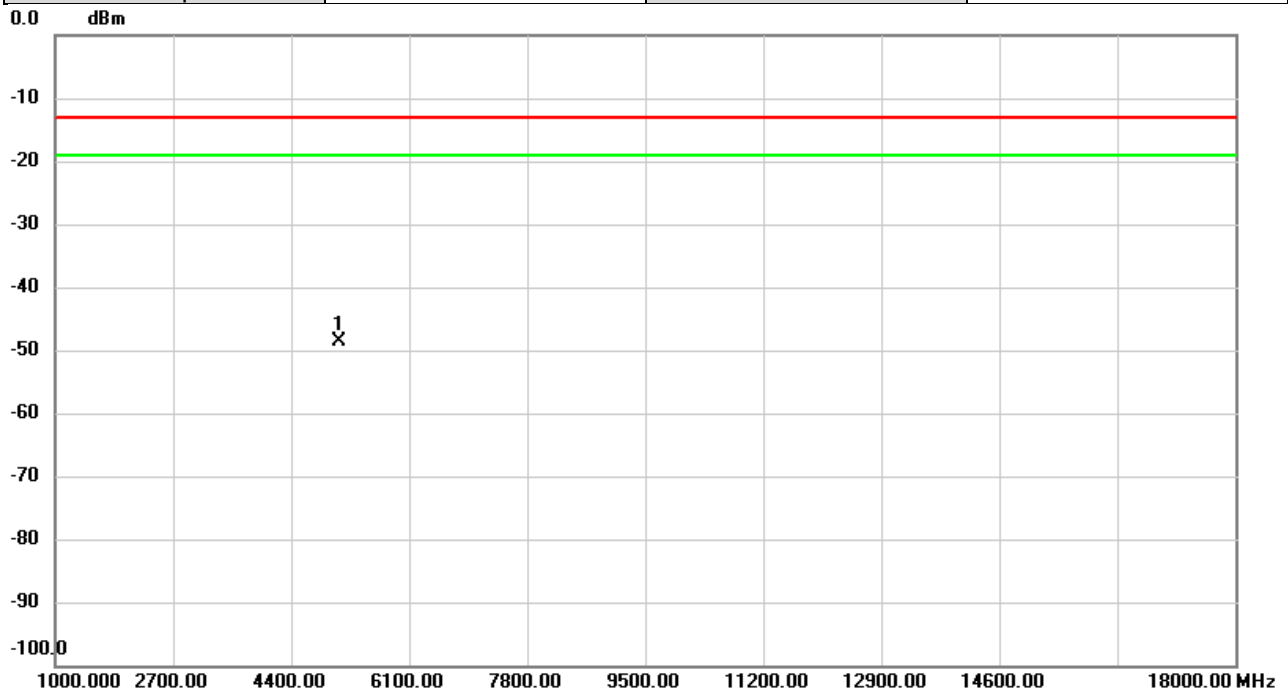


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5080.000	-62.68	14.08	-48.60	-13.00	-35.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

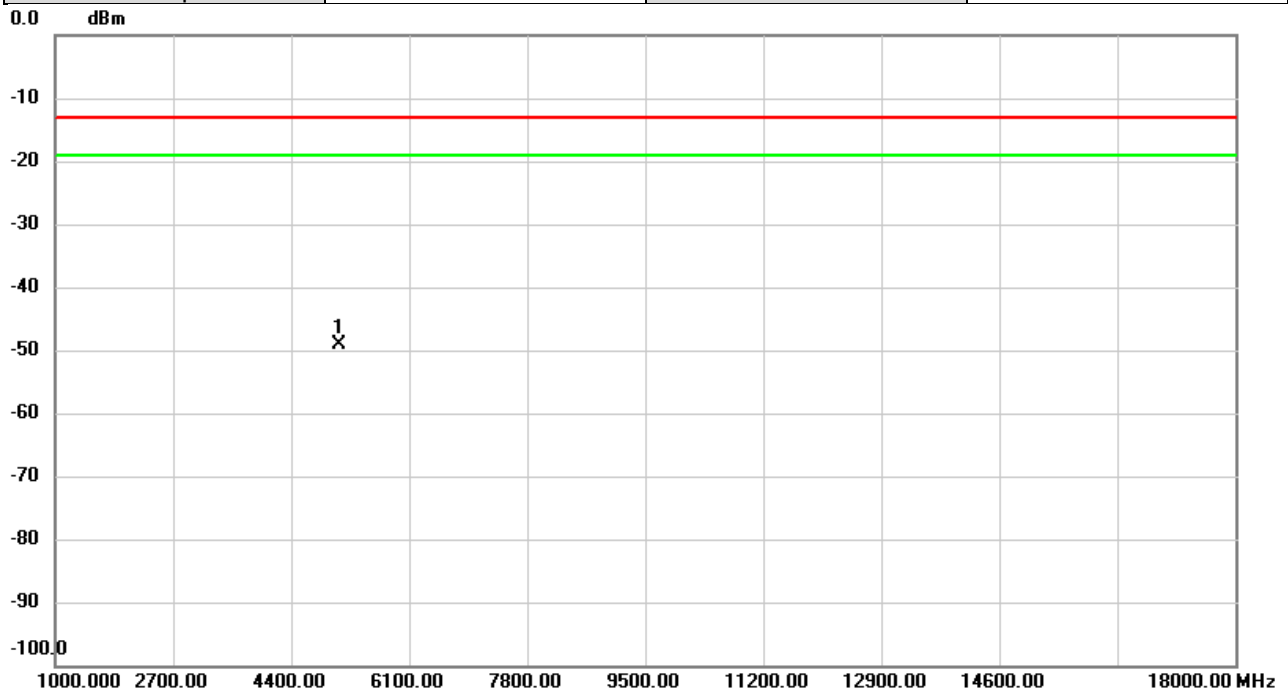


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5080.000	-63.00	13.89	-49.11	-13.00	-36.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

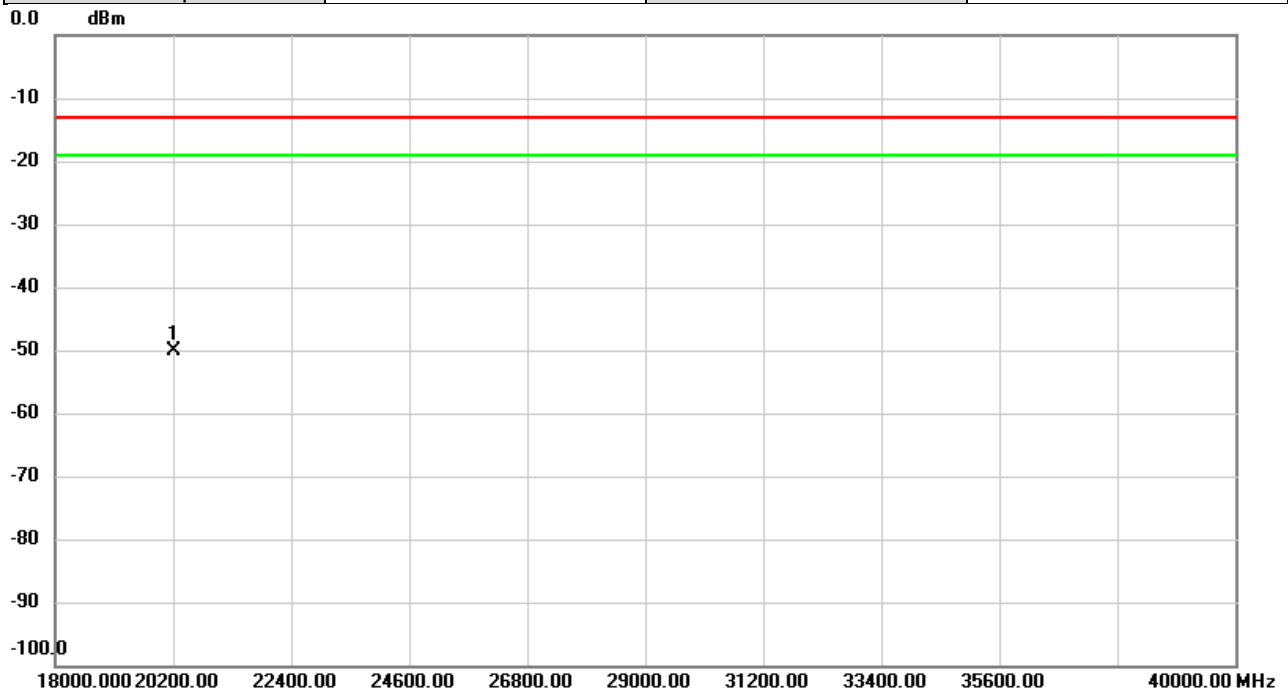


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20200.00	-51.68	1.57	-50.11	-13.00	-37.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_7C	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

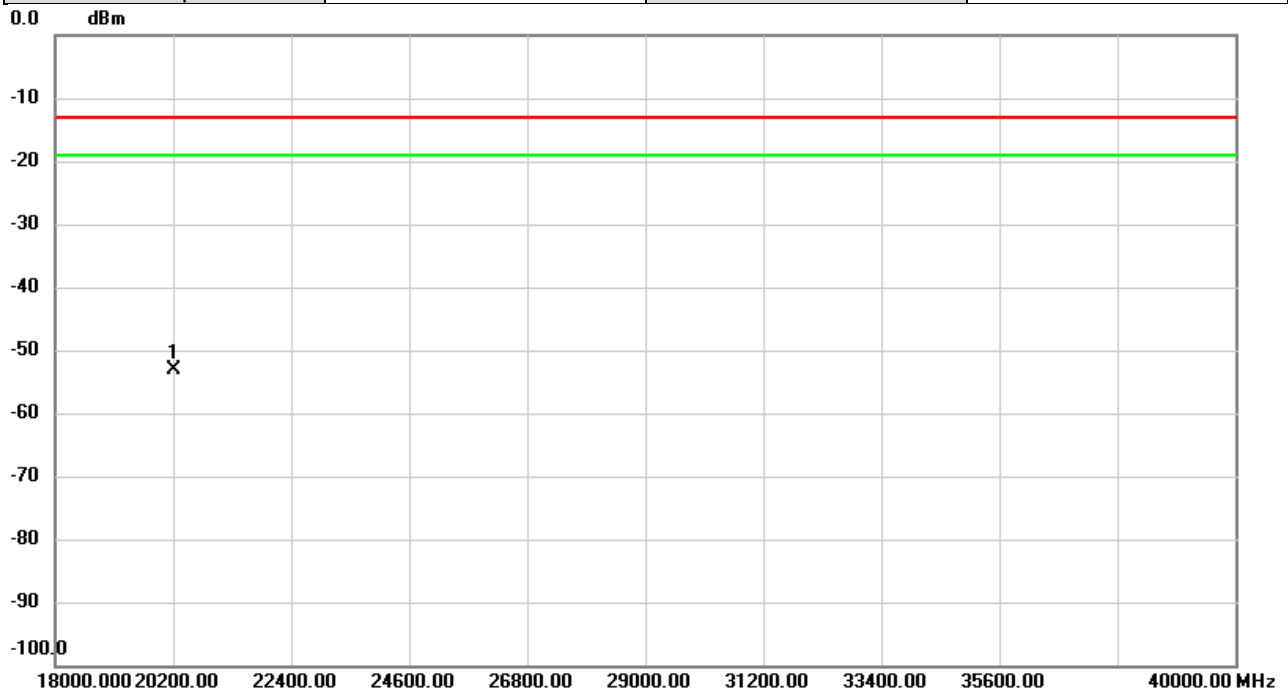


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20200.00	-53.53	0.53	-53.00	-13.00	-40.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

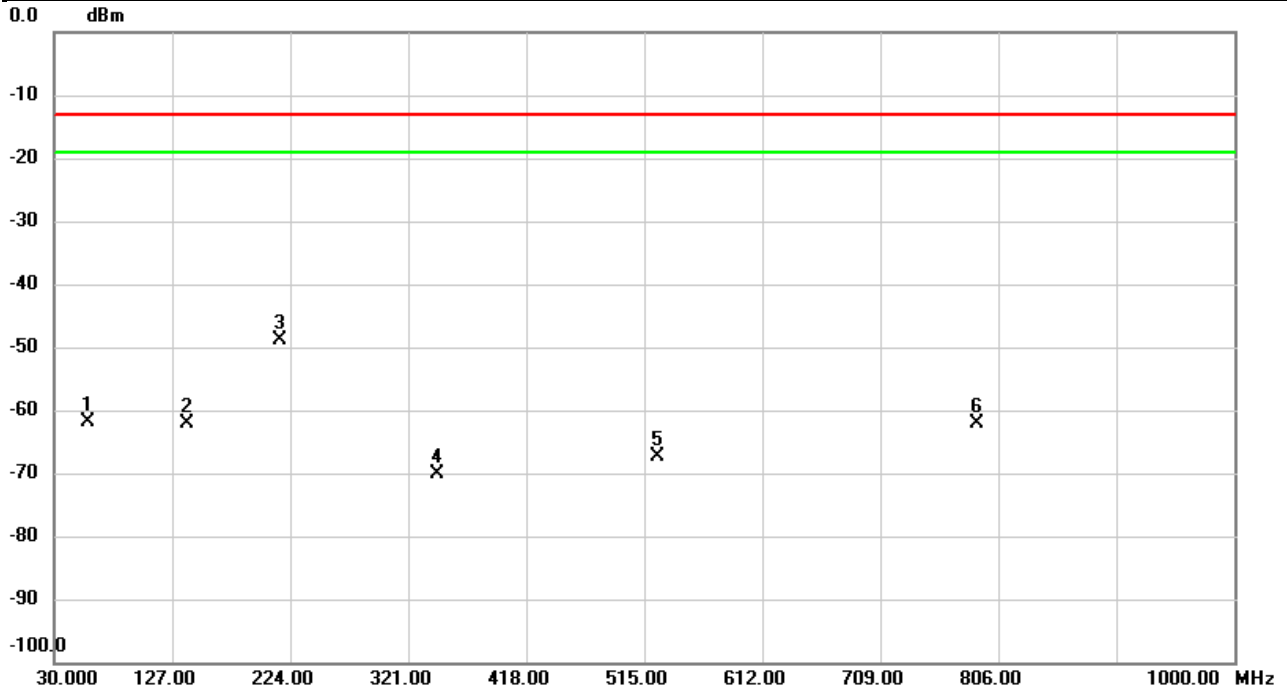


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		57.1600	-56.56	-5.19	-61.75	-13.00	-48.75	peak	
2		139.2220	-60.68	-1.38	-62.06	-13.00	-49.06	peak	
3	*	215.9167	-47.31	-1.53	-48.84	-13.00	-35.84	peak	
4		345.2823	-69.22	-0.79	-70.01	-13.00	-57.01	peak	
5		525.5082	-71.10	3.63	-67.47	-13.00	-54.47	peak	
6		788.2490	-68.21	5.99	-62.22	-13.00	-49.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

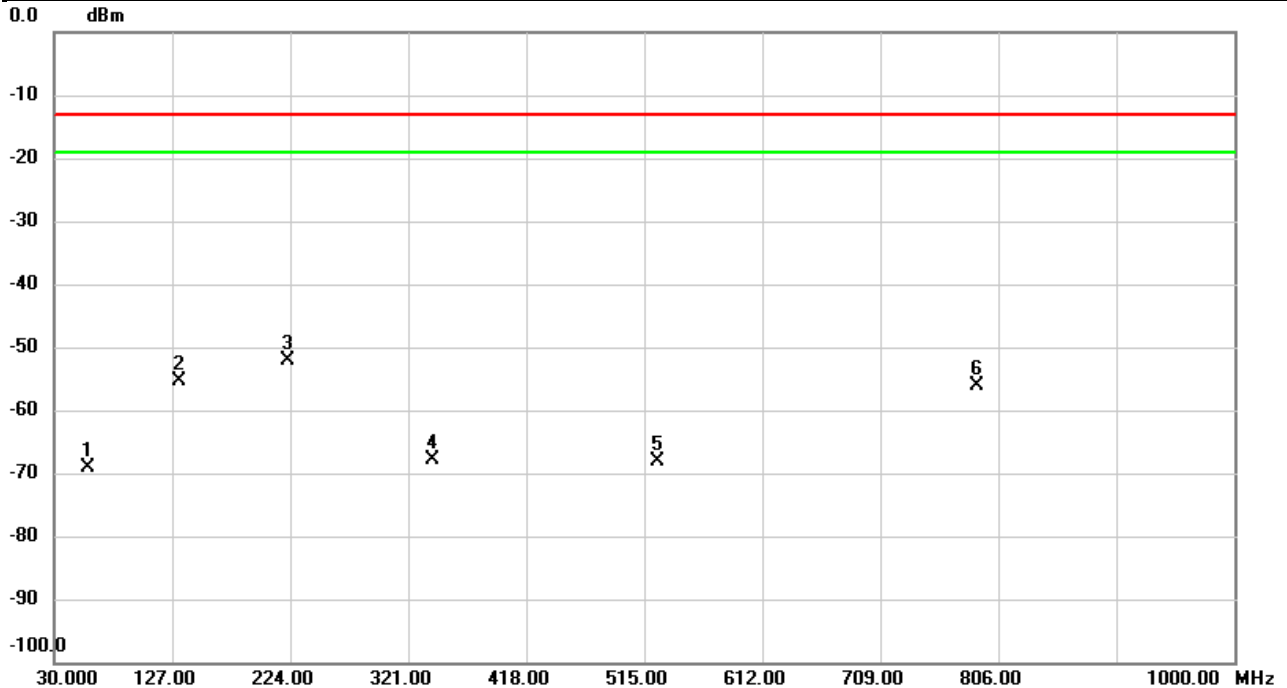


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		58.0006	-67.95	-1.23	-69.18	-13.00	-56.18	peak	
2		132.4320	-51.29	-4.20	-55.49	-13.00	-42.49	peak	
3	*	221.7690	-45.42	-6.78	-52.20	-13.00	-39.20	peak	
4		340.8203	-66.88	-1.07	-67.95	-13.00	-54.95	peak	
5		525.4760	-69.27	1.13	-68.14	-13.00	-55.14	peak	
6		788.2490	-62.16	6.06	-56.10	-13.00	-43.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

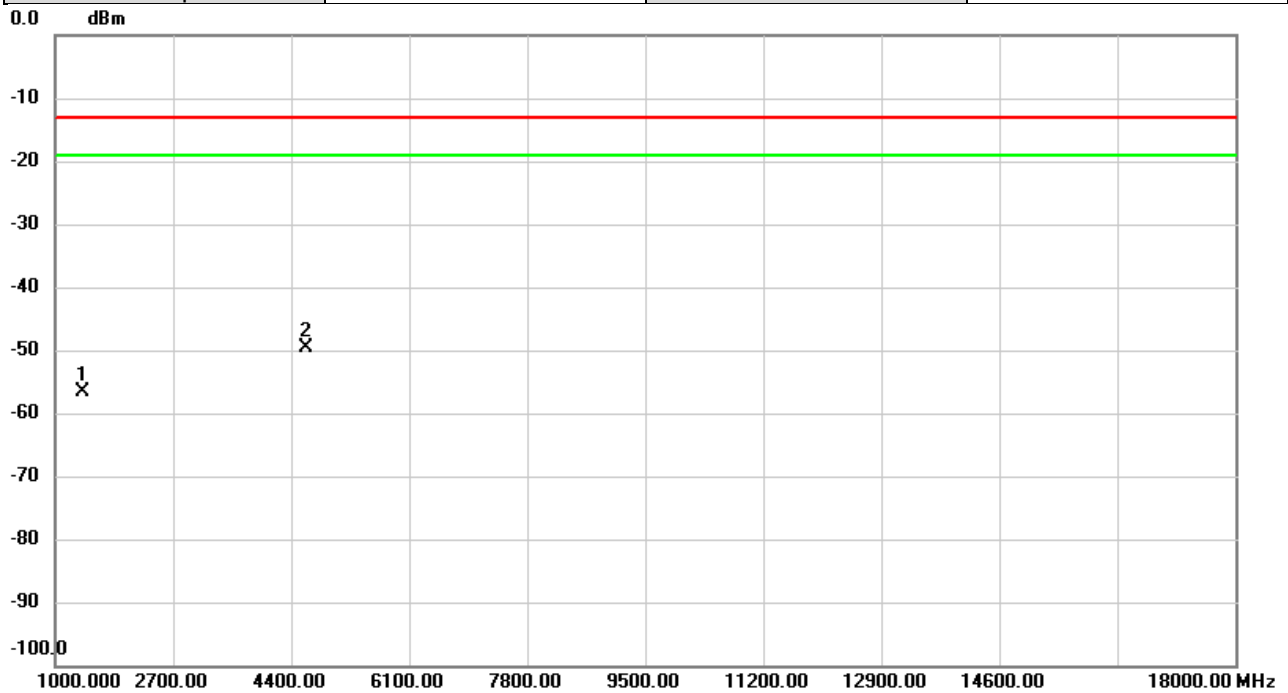


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-61.46	4.93	-56.53	-13.00	-43.53	peak	
2	*	4611.000	-62.90	13.23	-49.67	-13.00	-36.67	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

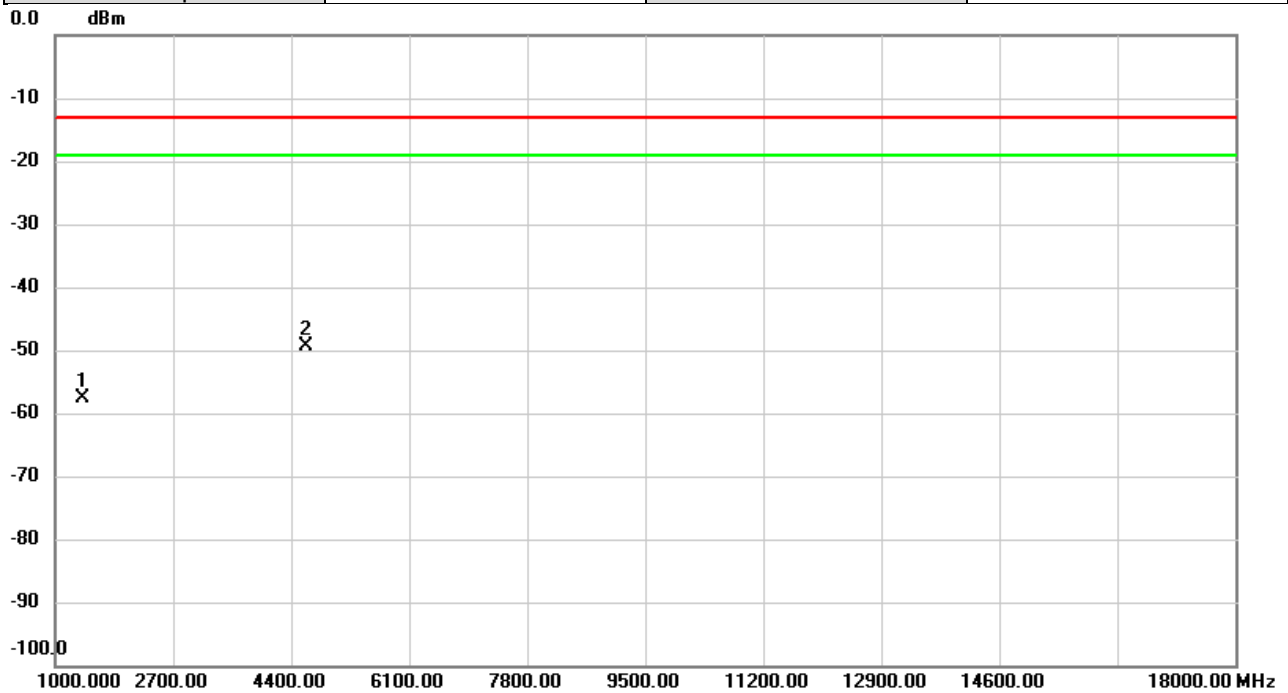


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-62.01	4.50	-57.51	-13.00	-44.51	peak	
2	*	4611.000	-62.41	13.00	-49.41	-13.00	-36.41	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

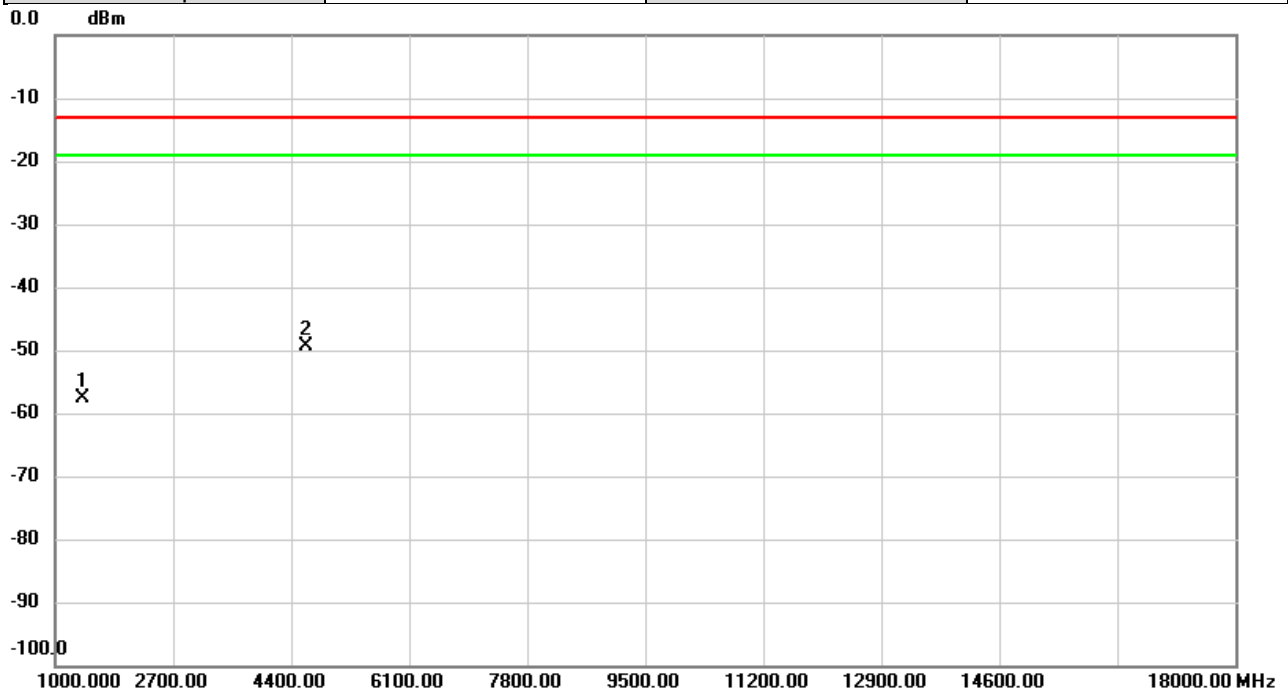


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-62.47	4.91	-57.56	-13.00	-44.56	peak	
2	*	4611.000	-62.61	13.23	-49.38	-13.00	-36.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

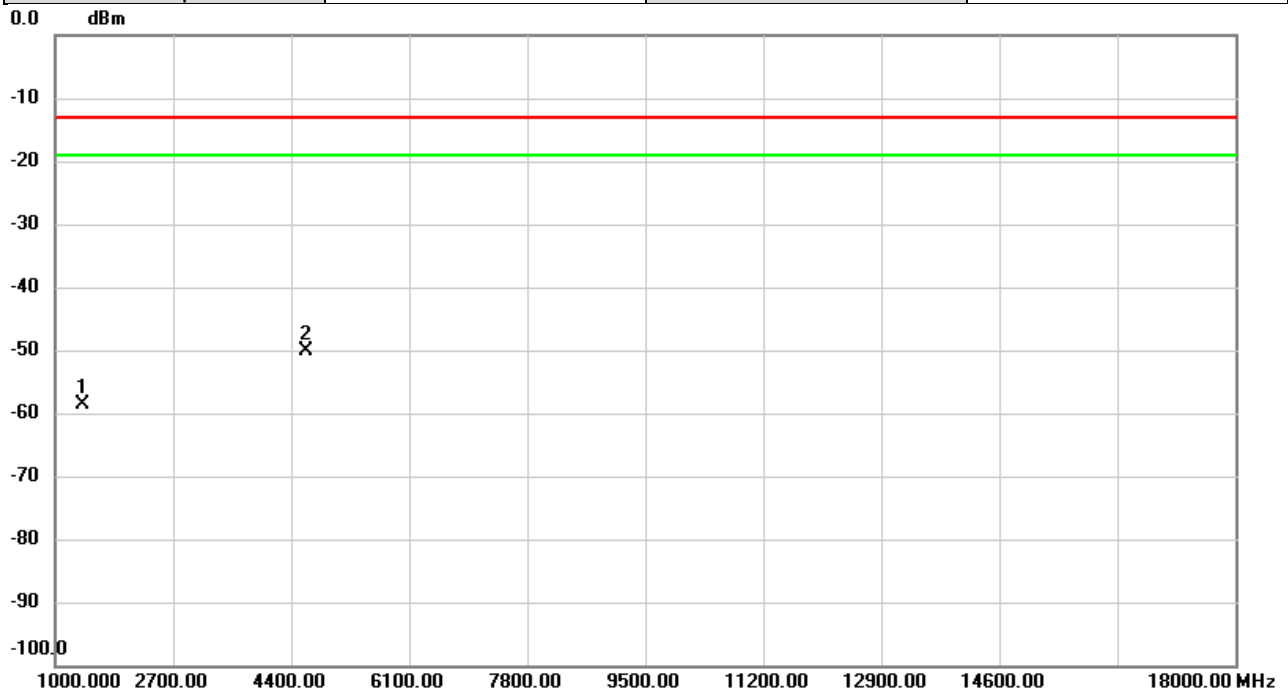


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-63.21	4.48	-58.73	-13.00	-45.73	peak	
2	*	4611.000	-63.01	13.00	-50.01	-13.00	-37.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

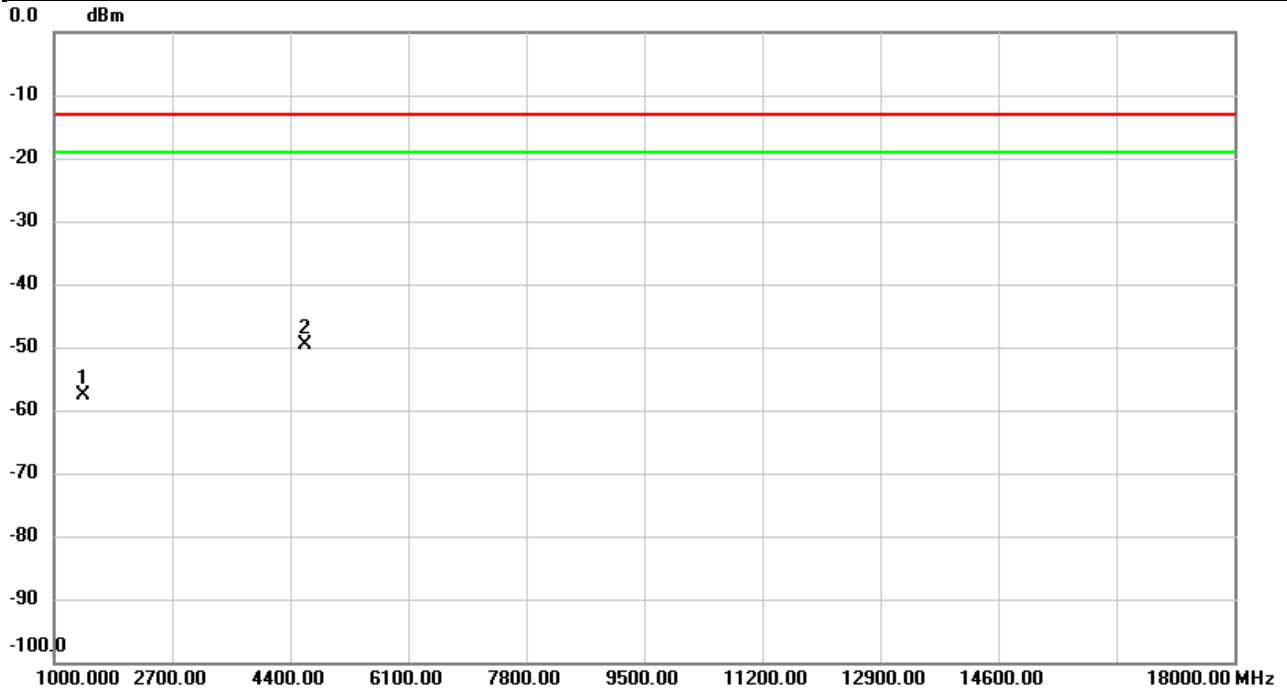


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-62.47	4.89	-57.58	-13.00	-44.58	peak	
2	*	4611.000	-62.94	13.23	-49.71	-13.00	-36.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

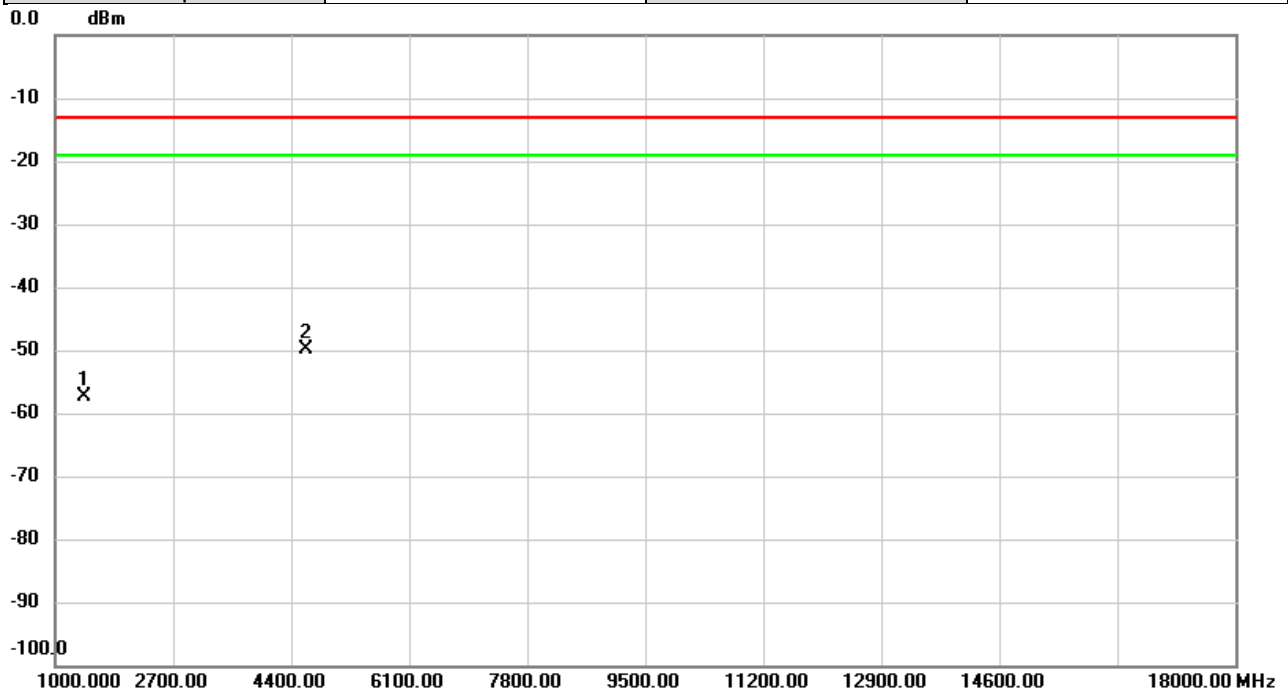


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-61.79	4.45	-57.34	-13.00	-44.34	peak	
2	*	4611.000	-62.89	13.00	-49.89	-13.00	-36.89	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

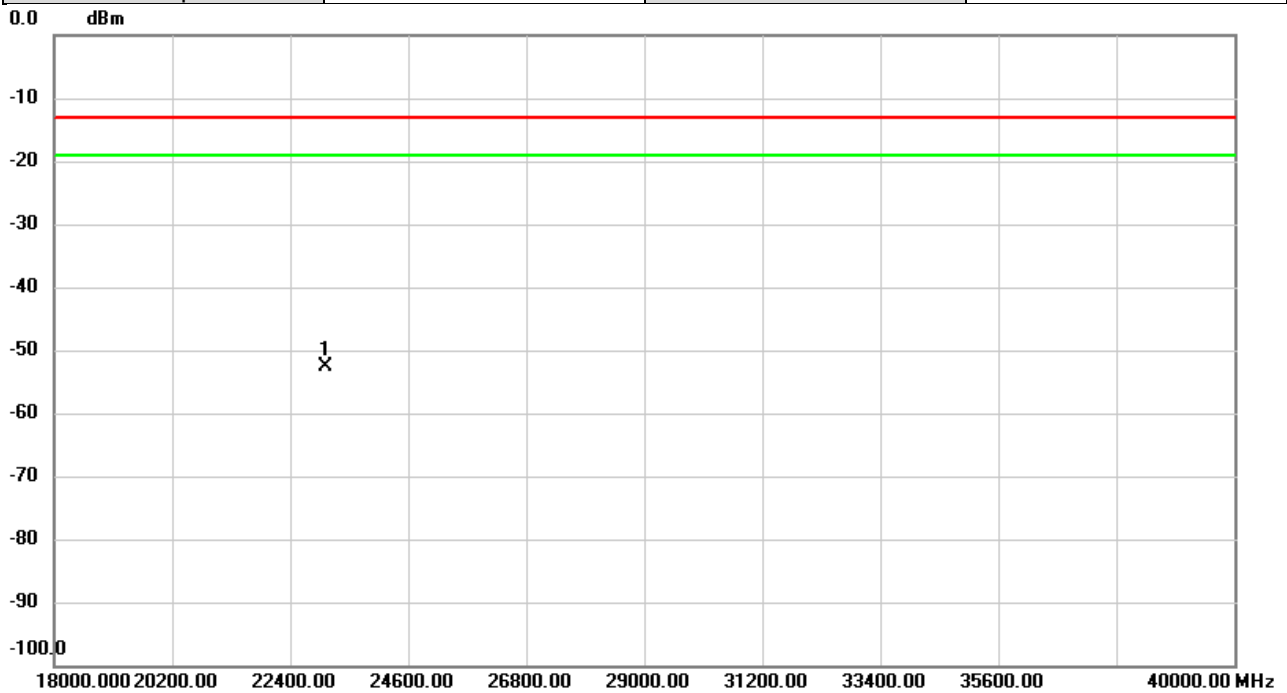


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23055.00	-56.63	4.05	-52.58	-13.00	-39.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-30A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

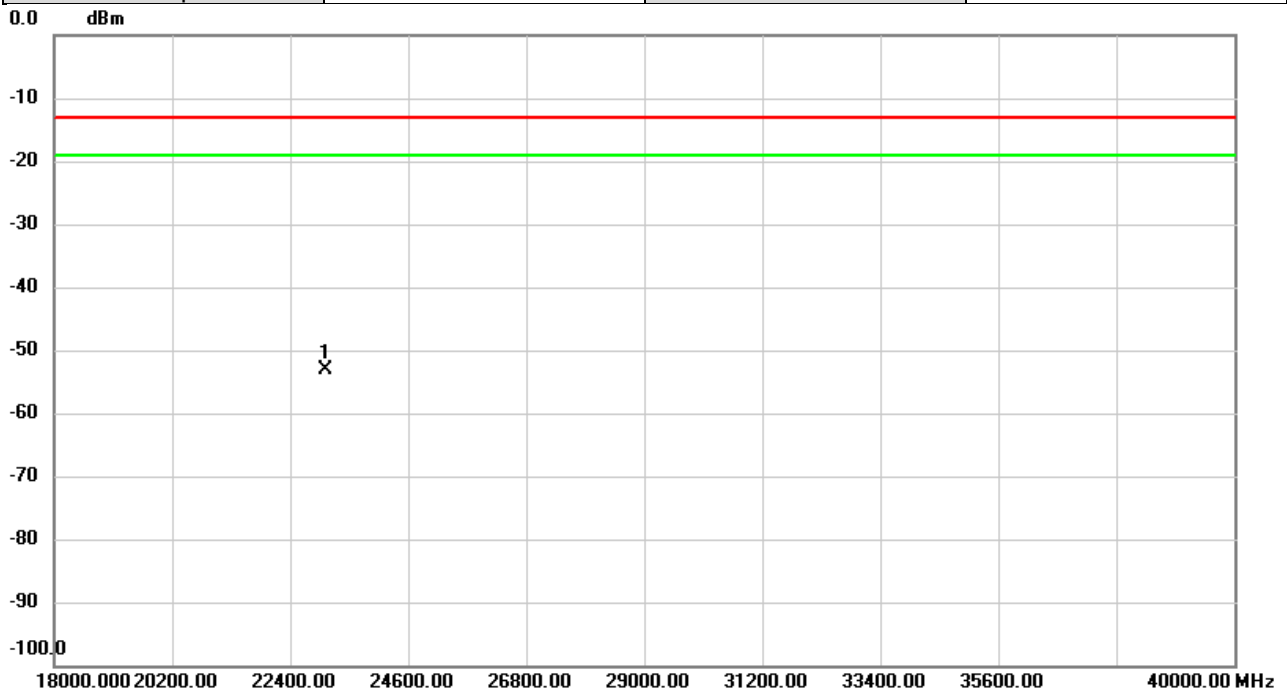


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23055.00	-56.15	3.01	-53.14	-13.00	-40.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

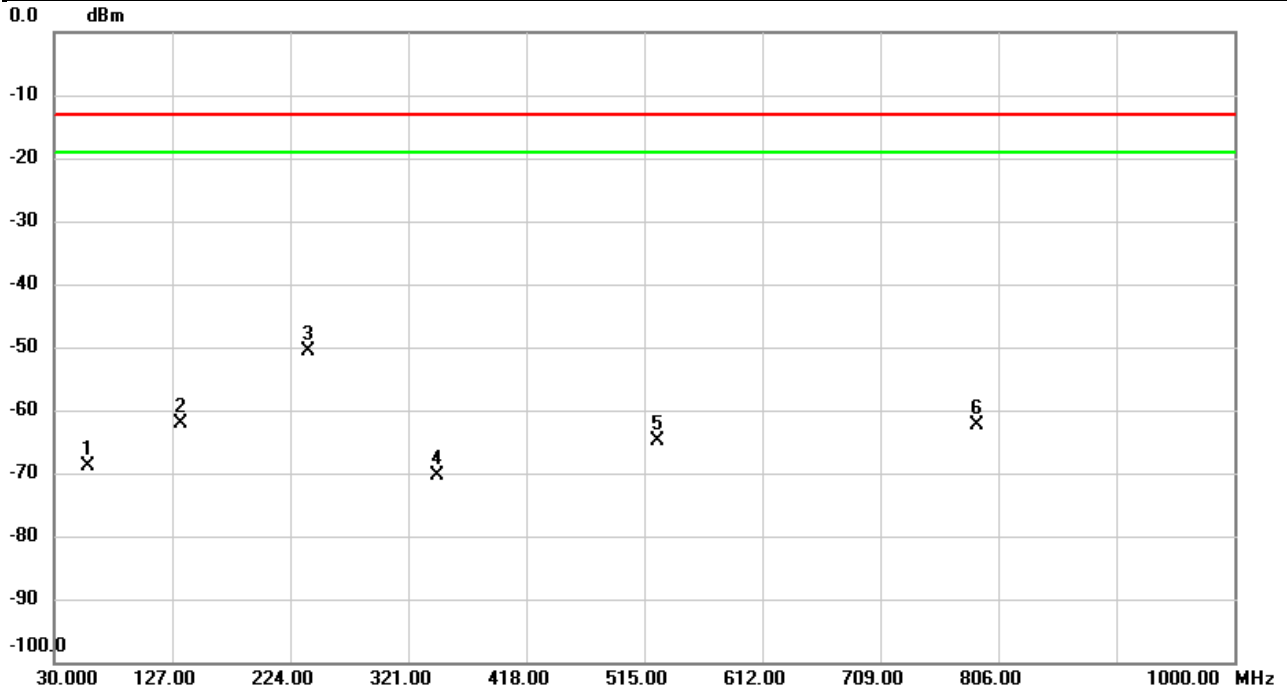


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.7097	-63.57	-5.27	-68.84	-13.00	-55.84	peak	
2		134.3720	-59.70	-2.45	-62.15	-13.00	-49.15	peak	
3	*	238.4530	-50.25	-0.31	-50.56	-13.00	-37.56	peak	
4		345.0560	-69.63	-0.79	-70.42	-13.00	-57.42	peak	
5		525.5082	-68.41	3.63	-64.78	-13.00	-51.78	peak	
6		788.2490	-68.44	5.99	-62.45	-13.00	-49.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

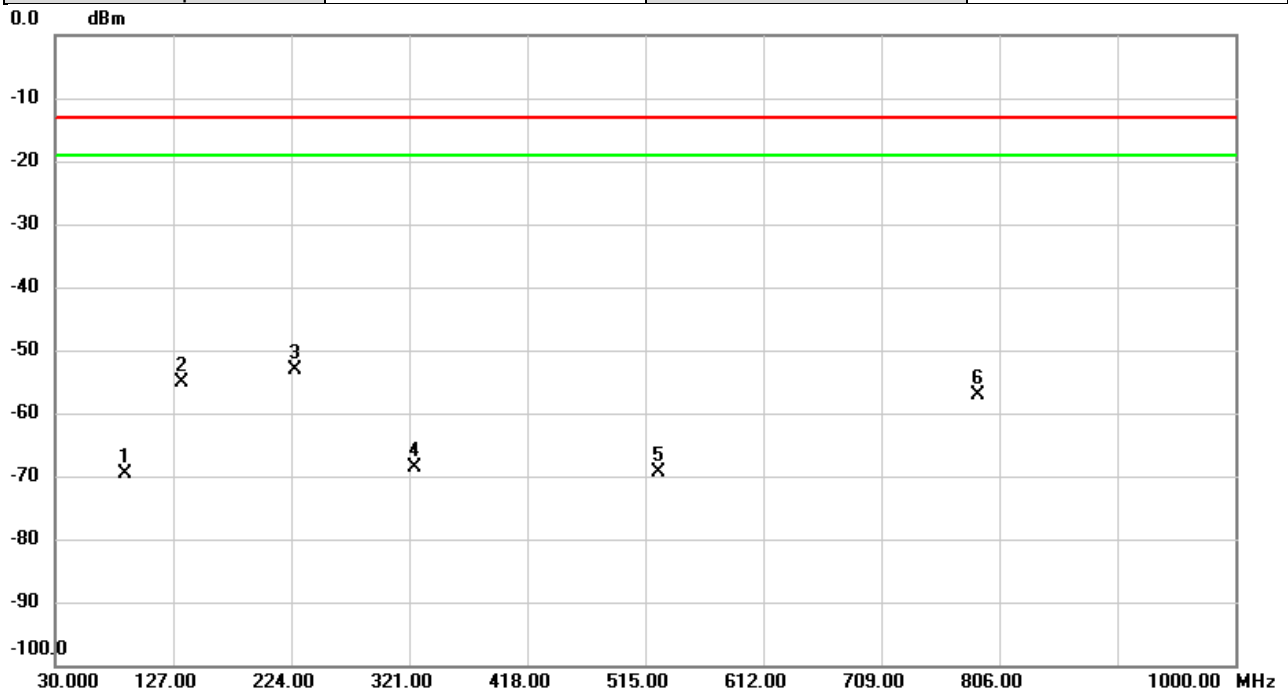


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		87.6503	-63.59	-6.15	-69.74	-13.00	-56.74	peak	
2		134.6953	-51.14	-4.00	-55.14	-13.00	-42.14	peak	
3	*	227.5566	-46.98	-6.10	-53.08	-13.00	-40.08	peak	
4		325.5590	-66.33	-2.18	-68.51	-13.00	-55.51	peak	
5		525.4760	-70.62	1.13	-69.49	-13.00	-56.49	peak	
6		788.2490	-63.16	6.06	-57.10	-13.00	-44.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

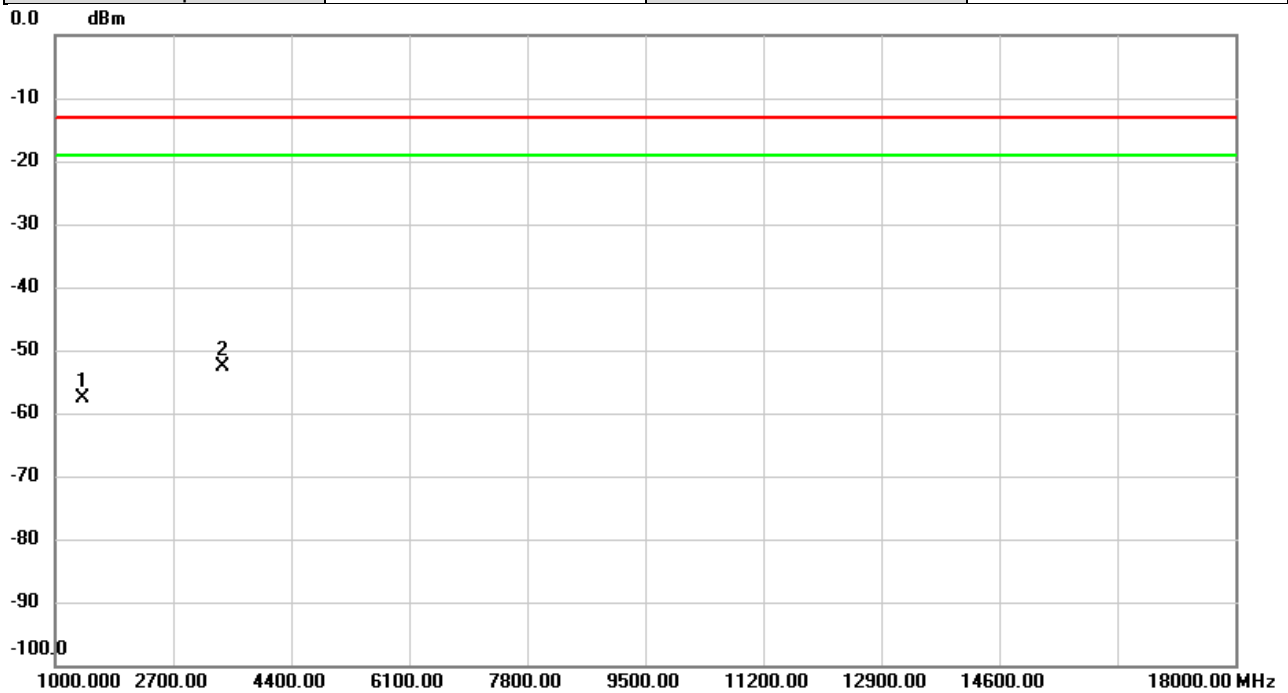


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-62.66	4.93	-57.73	-13.00	-44.73	peak	
2	*	3422.000	-62.67	10.07	-52.60	-13.00	-39.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

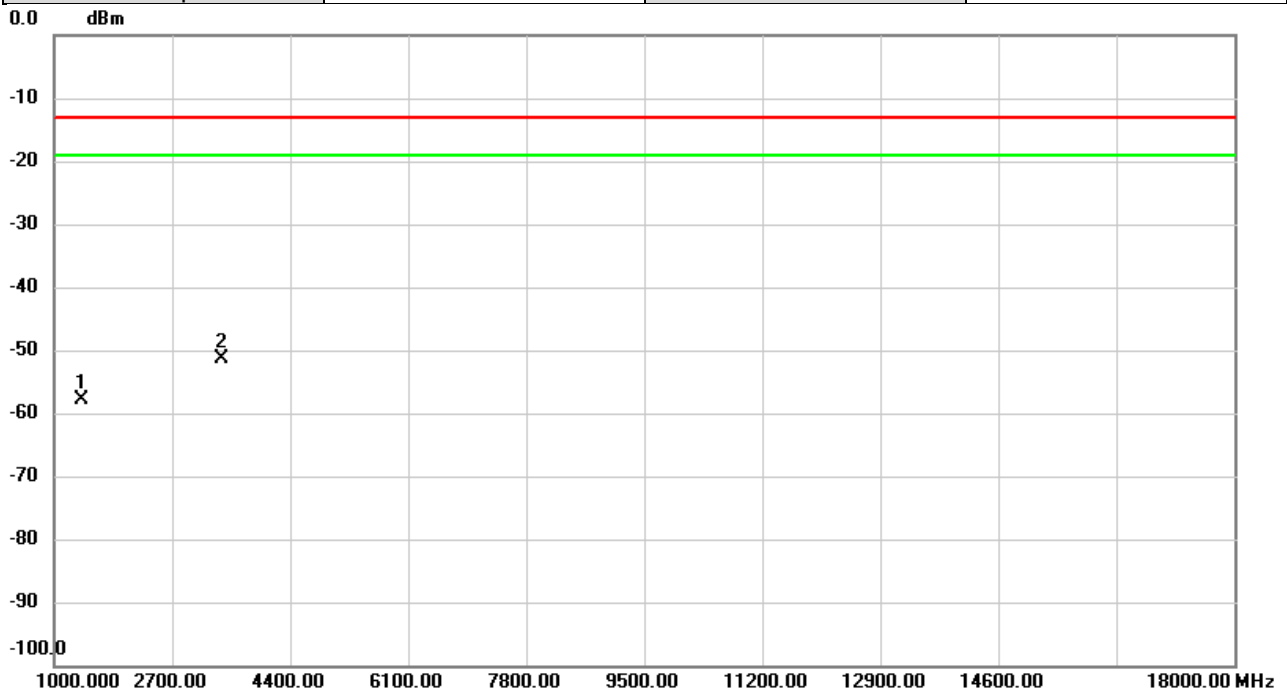


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-62.42	4.50	-57.92	-13.00	-44.92	peak	
2	*	3422.000	-61.19	9.71	-51.48	-13.00	-38.48	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

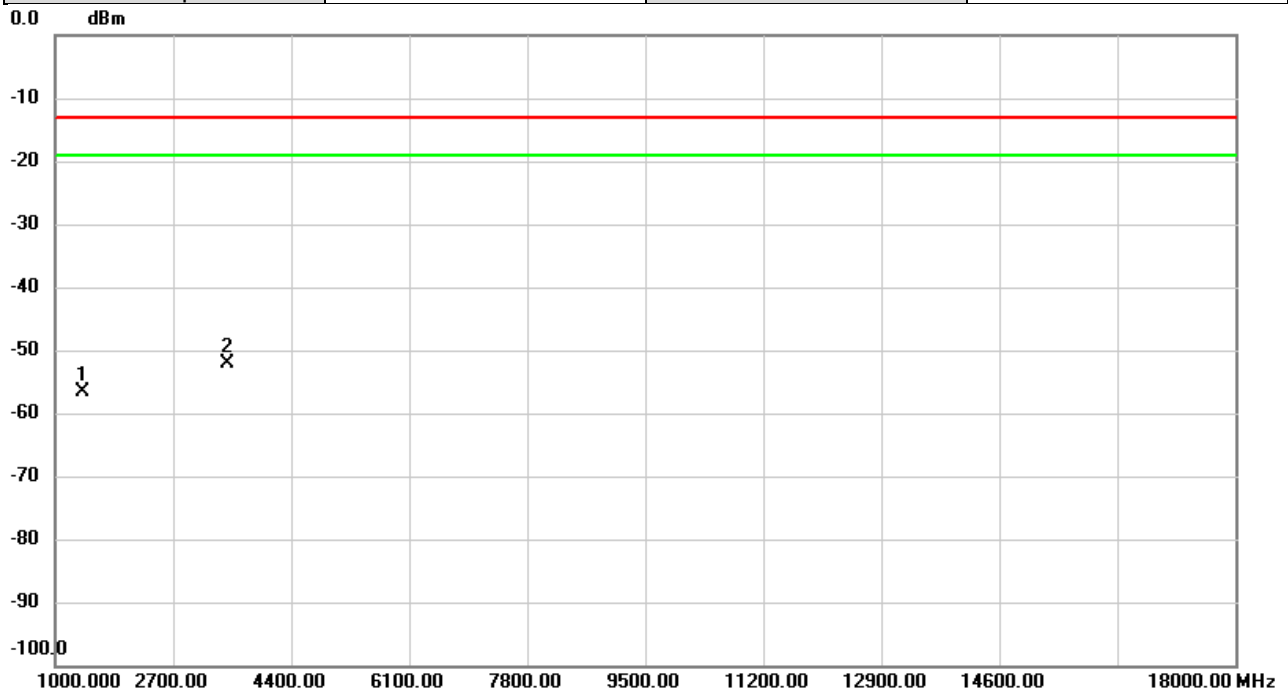


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-61.59	4.91	-56.68	-13.00	-43.68	peak	
2	*	3472.000	-62.42	10.26	-52.16	-13.00	-39.16	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

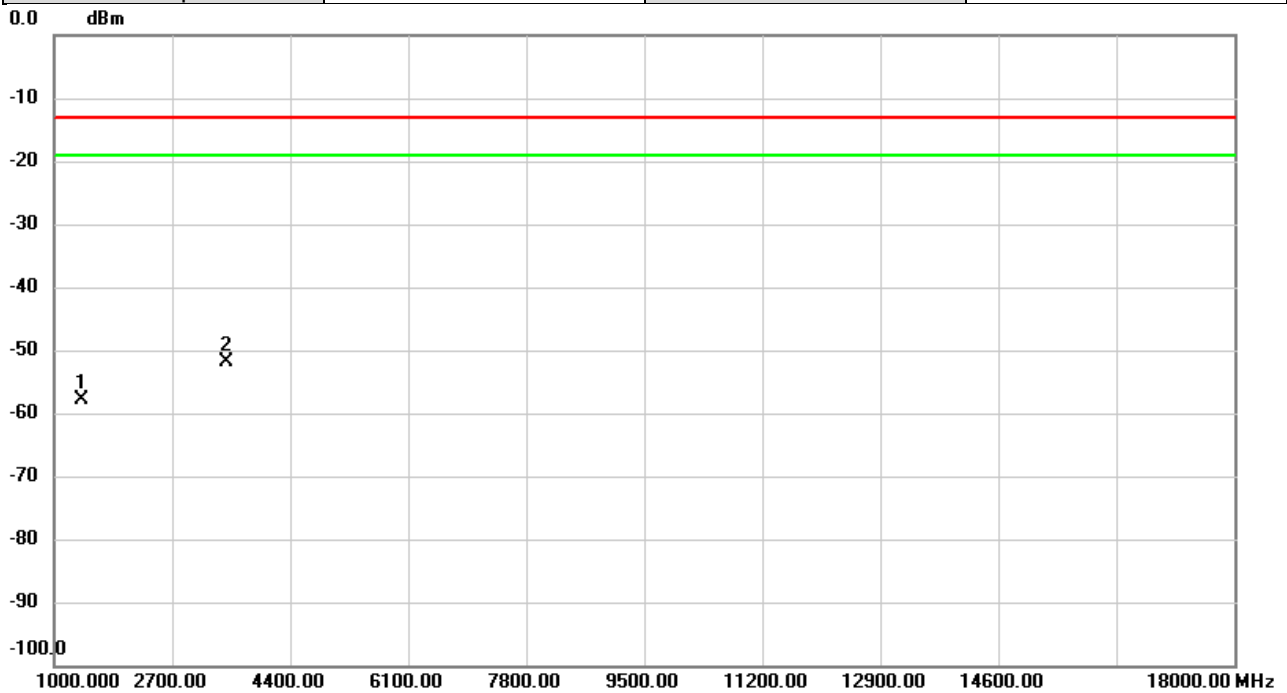


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-62.31	4.48	-57.83	-13.00	-44.83	peak	
2	*	3472.000	-62.01	10.02	-51.99	-13.00	-38.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

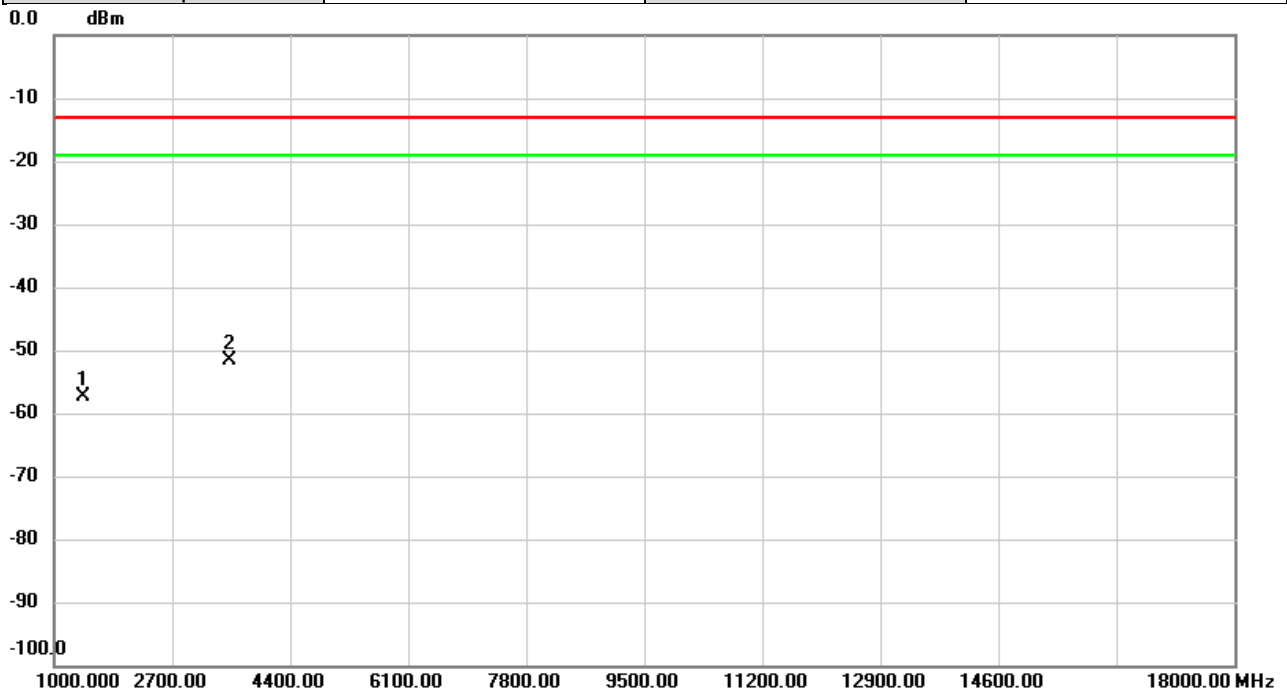


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-62.35	4.89	-57.46	-13.00	-44.46	peak	
2	*	3522.000	-61.99	10.26	-51.73	-13.00	-38.73	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_12A-66A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

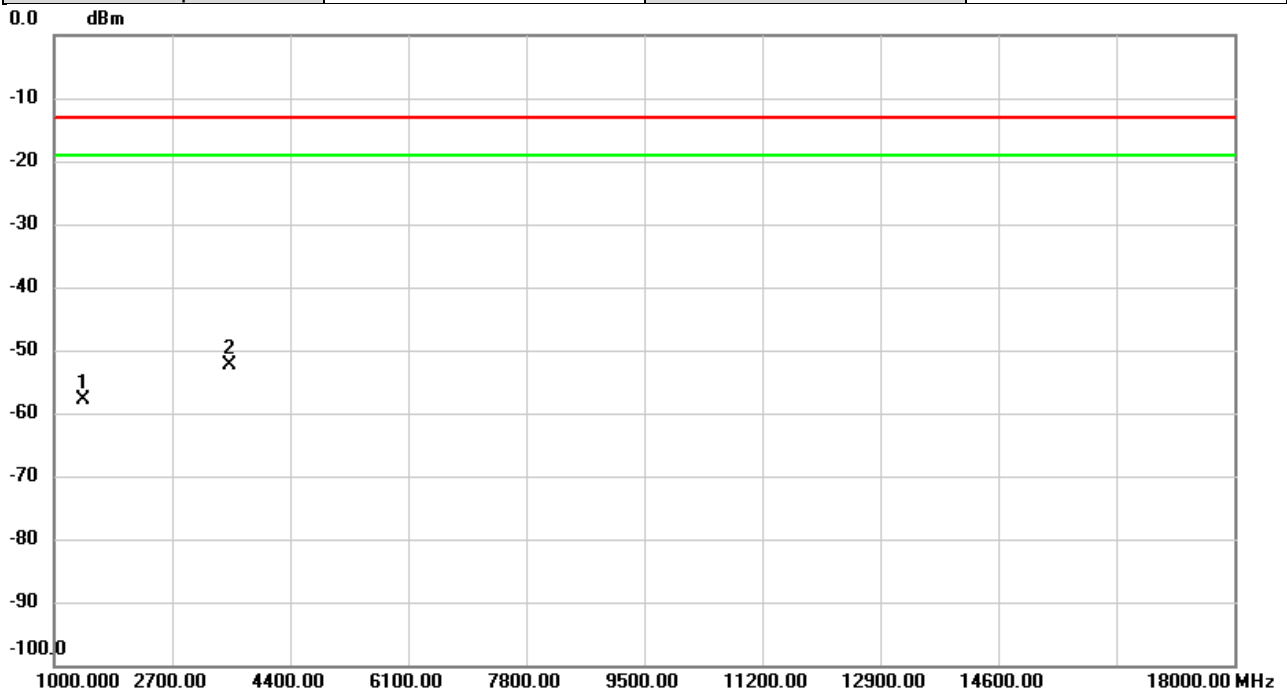


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-62.34	4.45	-57.89	-13.00	-44.89	peak	
2	*	3522.000	-62.48	10.00	-52.48	-13.00	-39.48	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

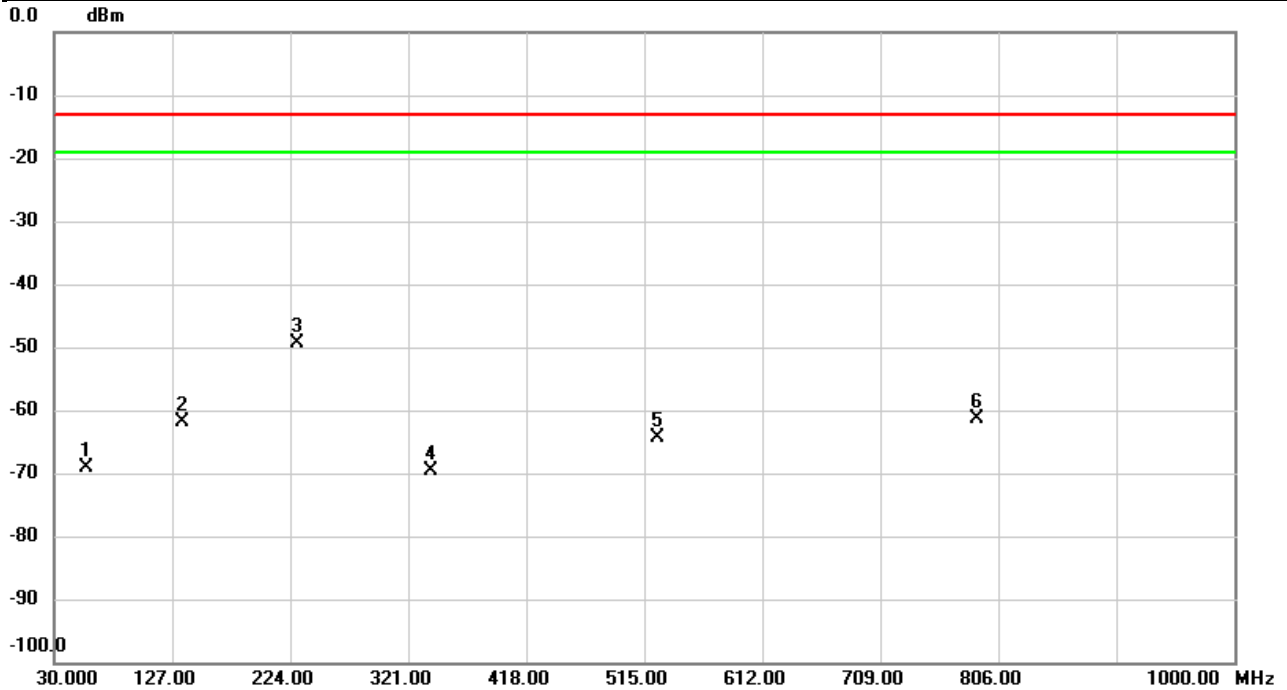


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.9983	-63.98	-5.16	-69.14	-13.00	-56.14	peak	
2		135.3420	-59.67	-2.24	-61.91	-13.00	-48.91	peak	
3	*	229.5613	-48.74	-0.70	-49.44	-13.00	-36.44	peak	
4		339.3977	-68.81	-0.84	-69.65	-13.00	-56.65	peak	
5		525.5082	-67.96	3.63	-64.33	-13.00	-51.33	peak	
6		788.2490	-67.31	5.99	-61.32	-13.00	-48.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

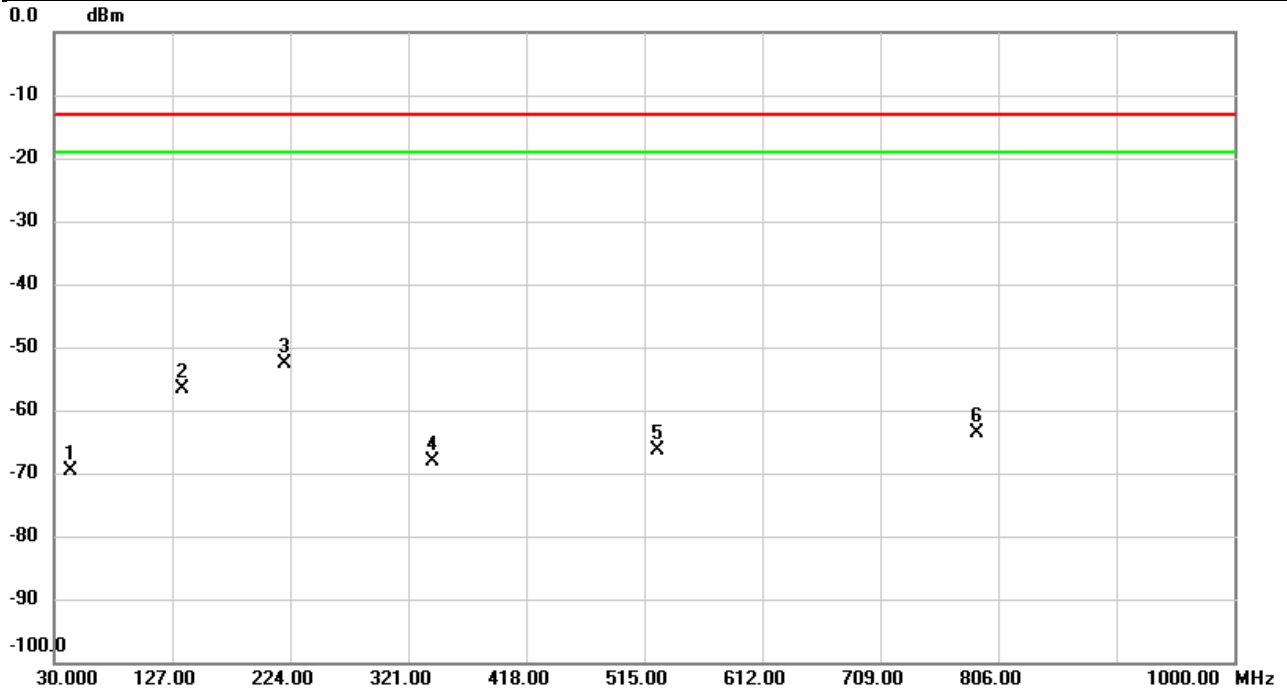


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		44.2266	-73.18	3.52	-69.66	-13.00	-56.66	peak	
2		134.9863	-52.66	-3.97	-56.63	-13.00	-43.63	peak	
3	*	220.0876	-45.59	-6.98	-52.57	-13.00	-39.57	peak	
4		341.6610	-67.19	-1.01	-68.20	-13.00	-55.20	peak	
5		525.5082	-67.44	1.13	-66.31	-13.00	-53.31	peak	
6		788.2490	-69.73	6.06	-63.67	-13.00	-50.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

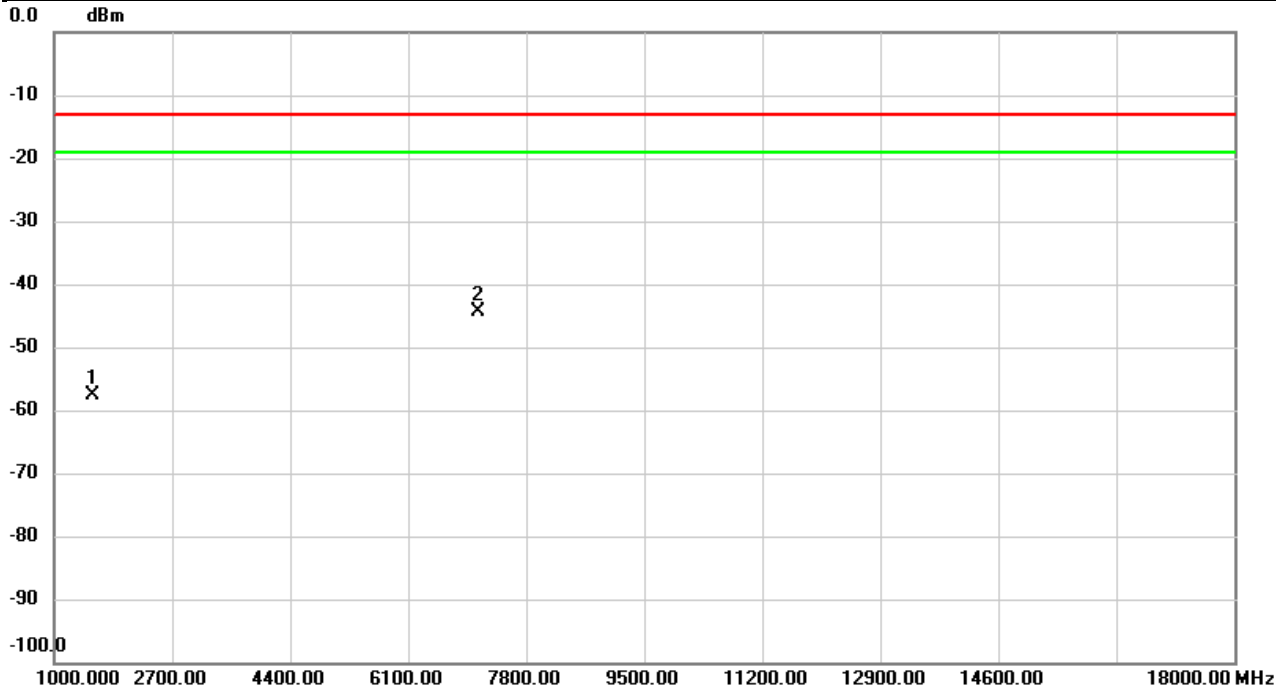

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.26	4.57	-57.69	-13.00	-44.69	peak	
2	*	7102.000	-62.93	18.46	-44.47	-13.00	-31.47	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

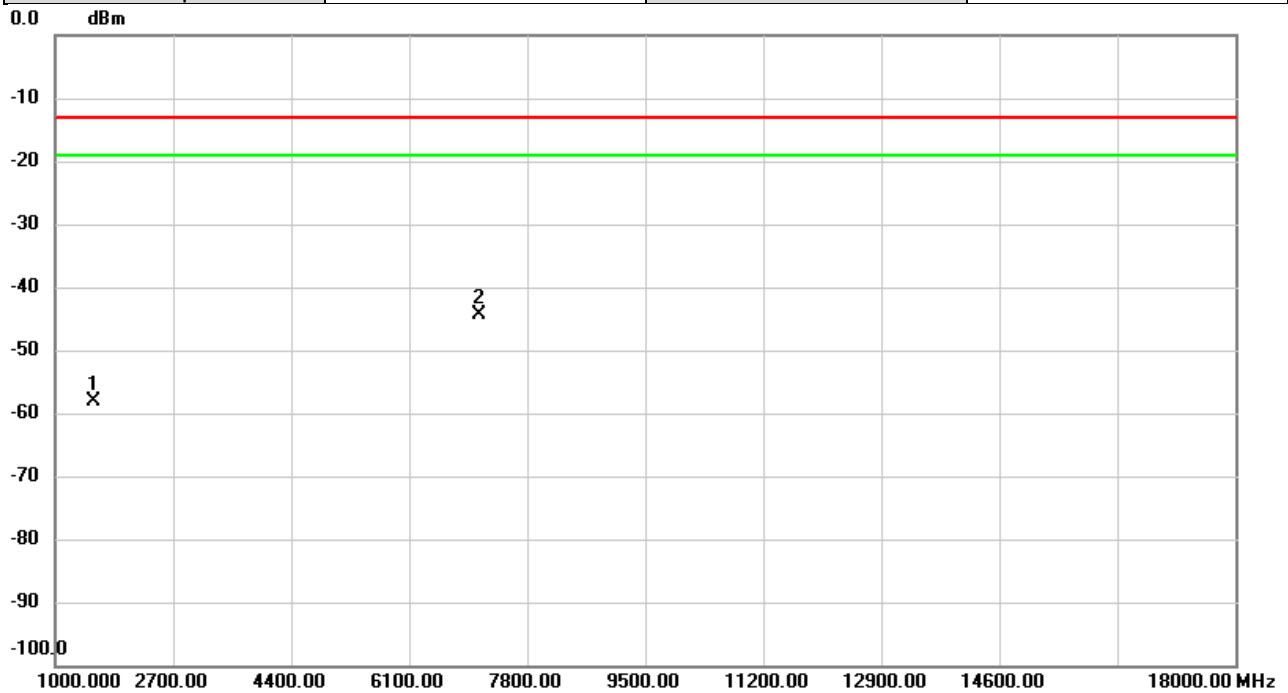


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.42	4.40	-58.02	-13.00	-45.02	peak	
2	*	7102.000	-62.86	18.42	-44.44	-13.00	-31.44	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

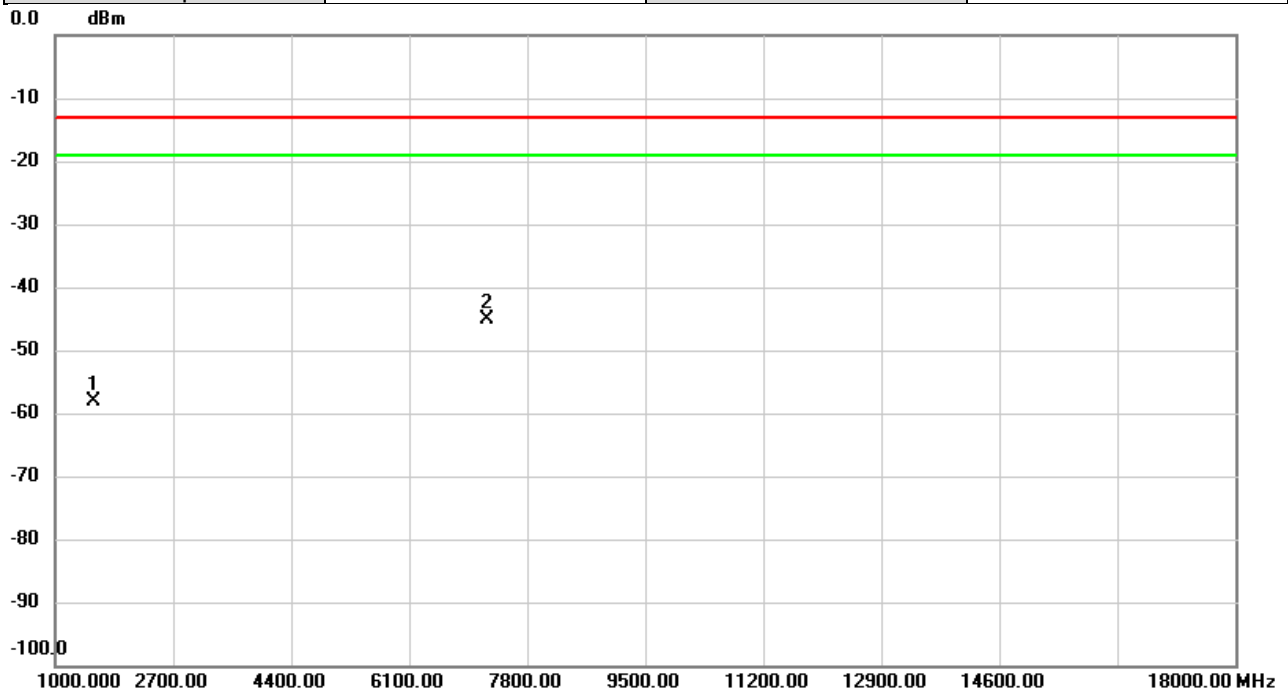


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.64	4.57	-58.07	-13.00	-45.07	peak	
2	*	7232.000	-62.87	17.85	-45.02	-13.00	-32.02	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

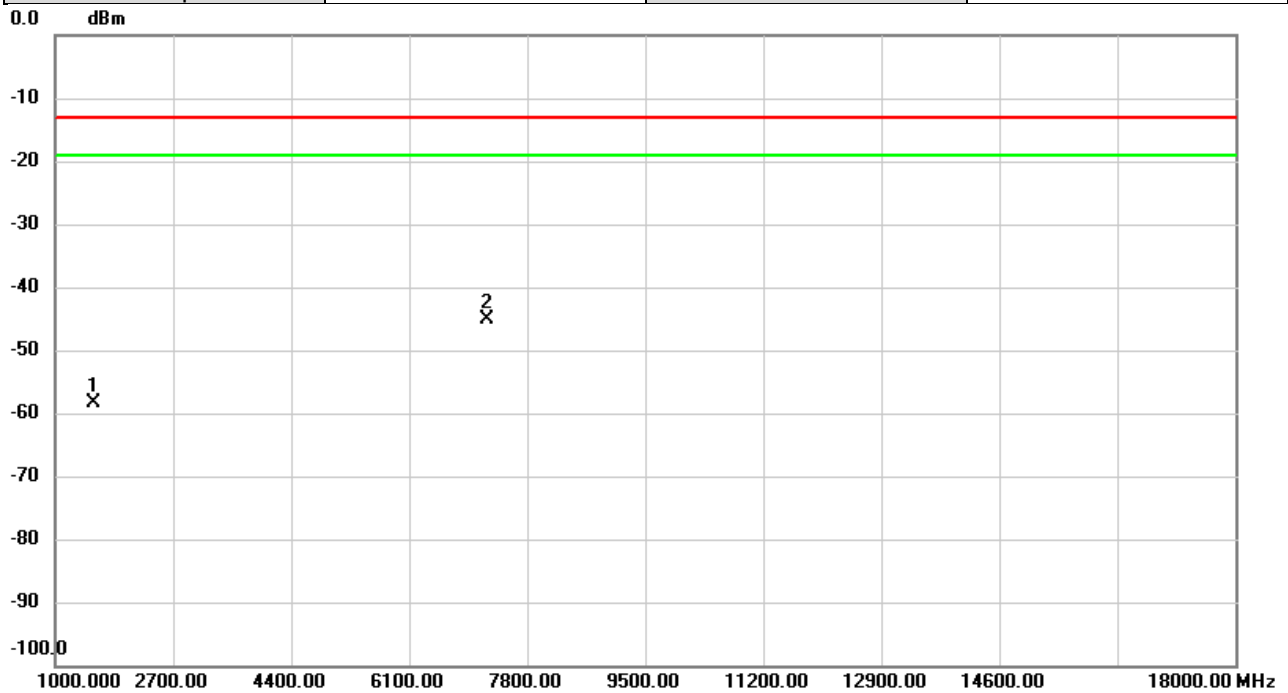


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.67	4.40	-58.27	-13.00	-45.27	peak	
2	*	7232.000	-62.64	17.52	-45.12	-13.00	-32.12	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

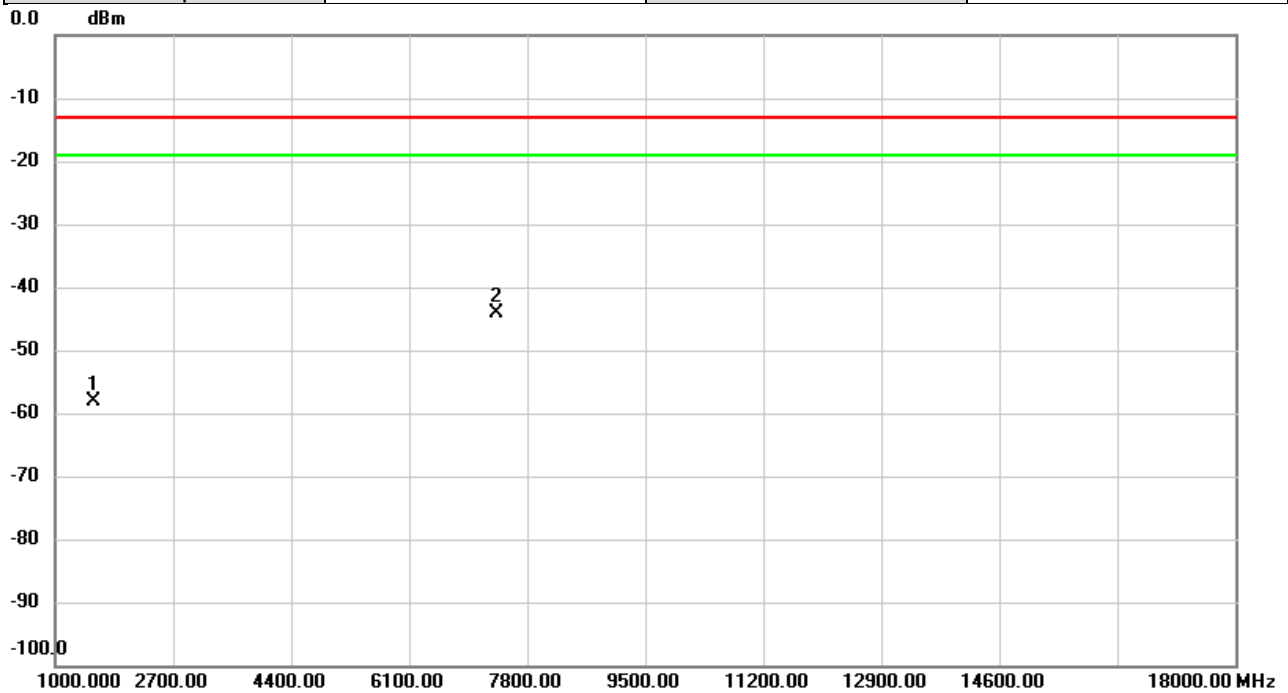


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.69	4.57	-58.12	-13.00	-45.12	peak	
2	*	7362.000	-61.72	17.71	-44.01	-13.00	-31.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

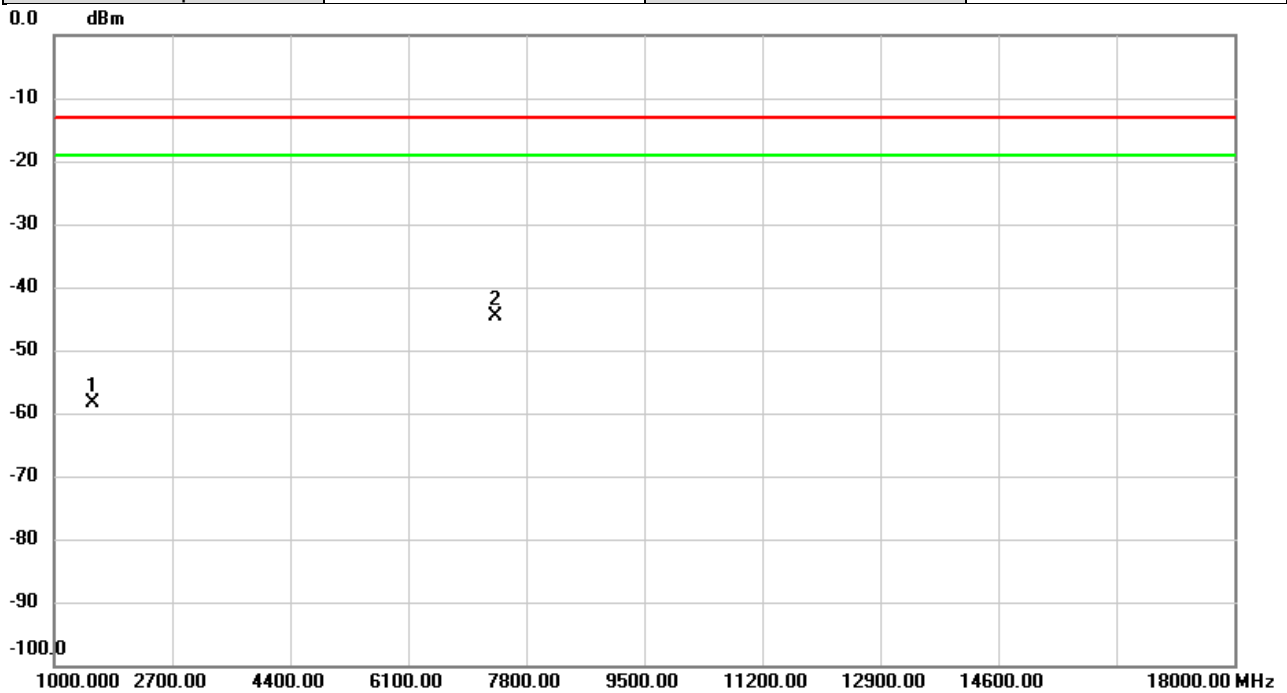


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1555.000	-62.67	4.40	-58.27	-13.00	-45.27	peak	
2	*	7362.000	-62.20	17.50	-44.70	-13.00	-31.70	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

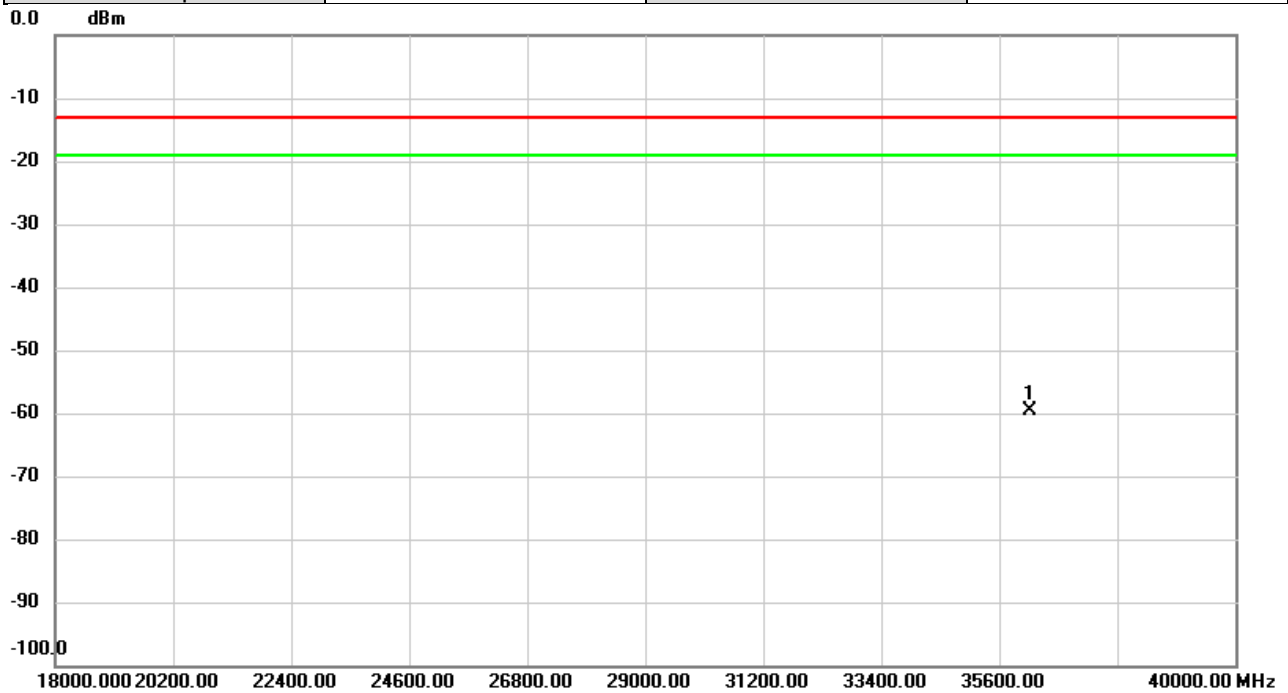


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	36160.00	-54.74	-4.96	-59.70	-13.00	-46.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-48A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

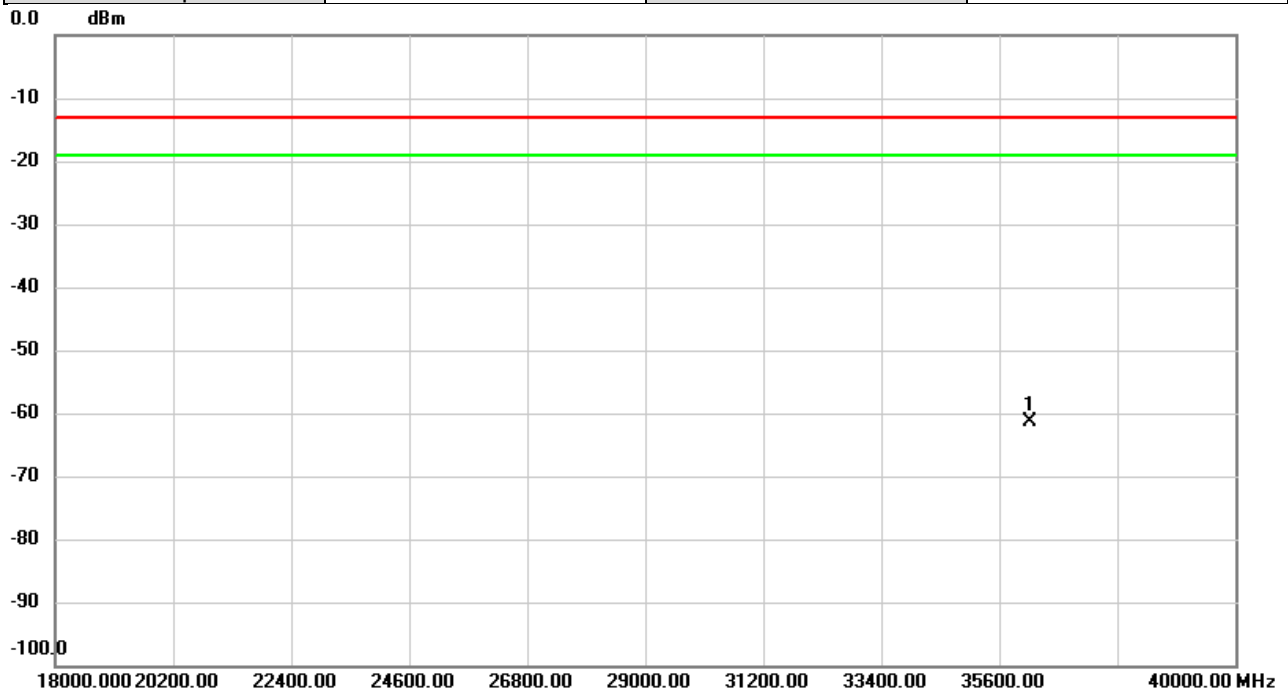


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	36160.00	-55.02	-6.34	-61.36	-13.00	-48.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

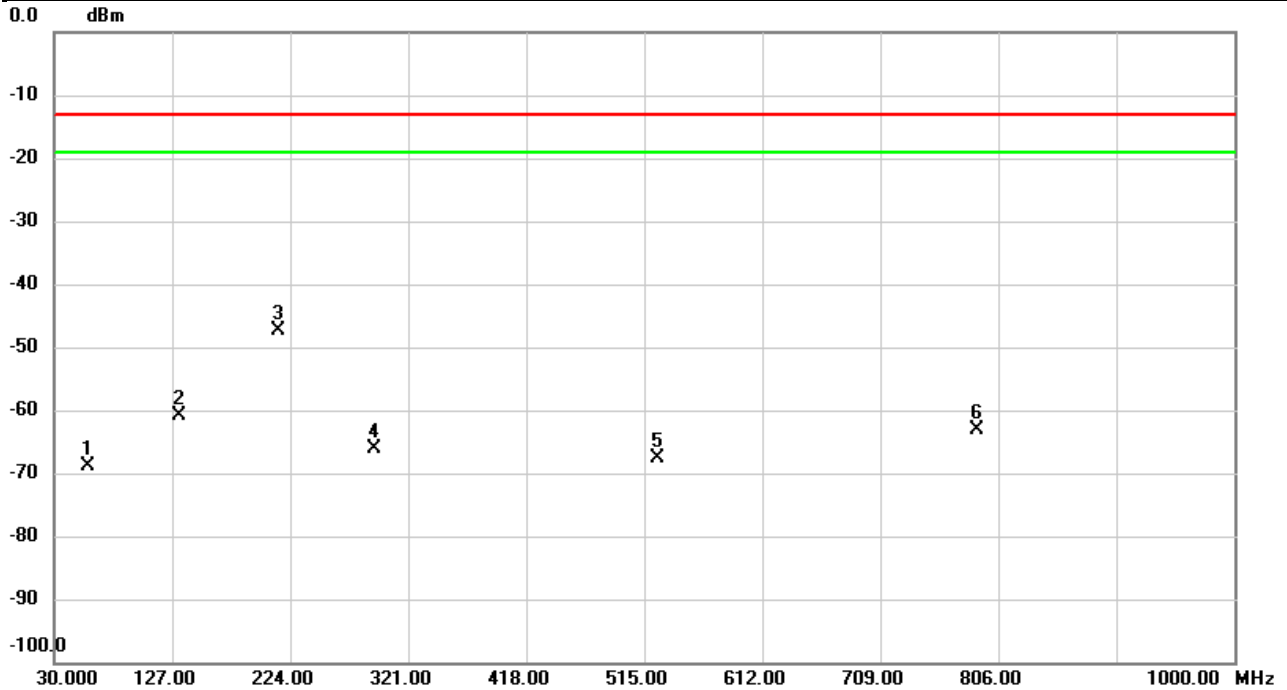


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.8713	-63.57	-5.30	-68.87	-13.00	-55.87	peak	
2		133.0462	-58.02	-2.75	-60.77	-13.00	-47.77	peak	
3	*	214.4617	-45.92	-1.46	-47.38	-13.00	-34.38	peak	
4		293.1610	-65.06	-1.17	-66.23	-13.00	-53.23	peak	
5		525.4760	-71.15	3.63	-67.52	-13.00	-54.52	peak	
6		788.2490	-69.16	5.99	-63.17	-13.00	-50.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

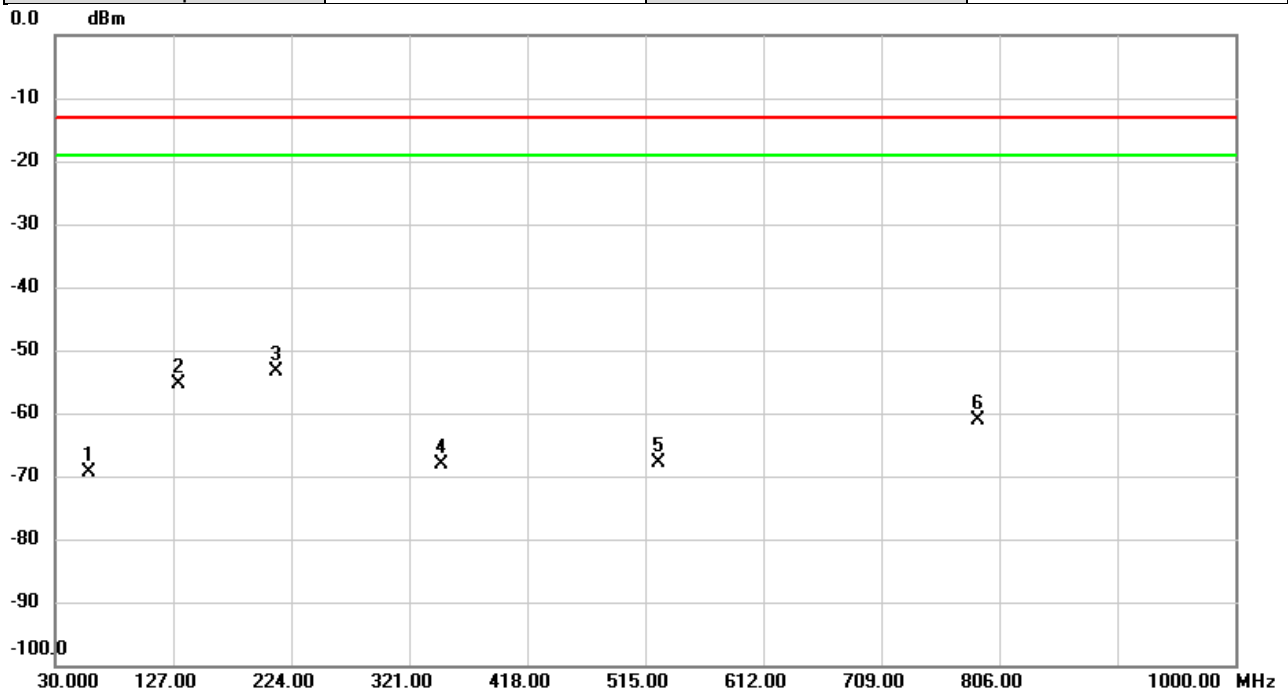


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.2570	-68.32	-0.97	-69.29	-13.00	-56.29	peak	
2		131.6236	-51.17	-4.27	-55.44	-13.00	-42.44	peak	
3	*	211.1313	-45.99	-7.31	-53.30	-13.00	-40.30	peak	
4		347.3840	-67.60	-0.59	-68.19	-13.00	-55.19	peak	
5		525.5082	-68.95	1.13	-67.82	-13.00	-54.82	peak	
6		788.2490	-67.20	6.06	-61.14	-13.00	-48.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

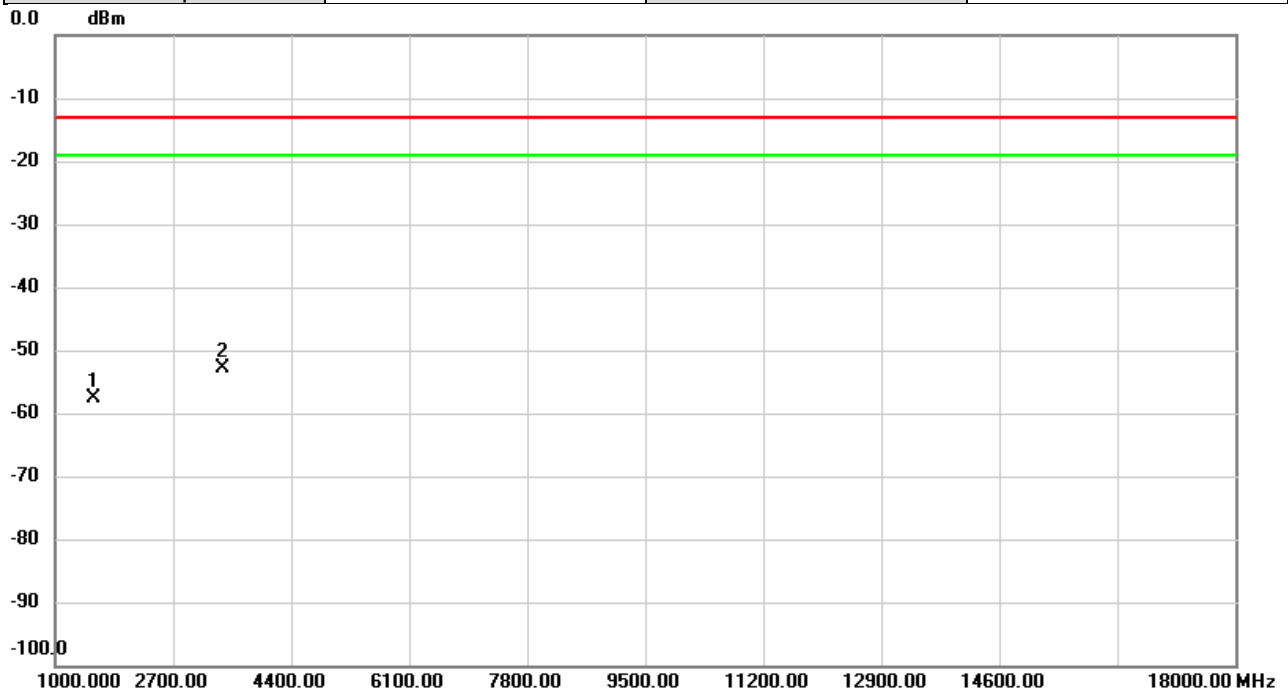


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.11	4.56	-57.55	-13.00	-44.55	peak	
2	*	3422.000	-62.85	10.07	-52.78	-13.00	-39.78	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

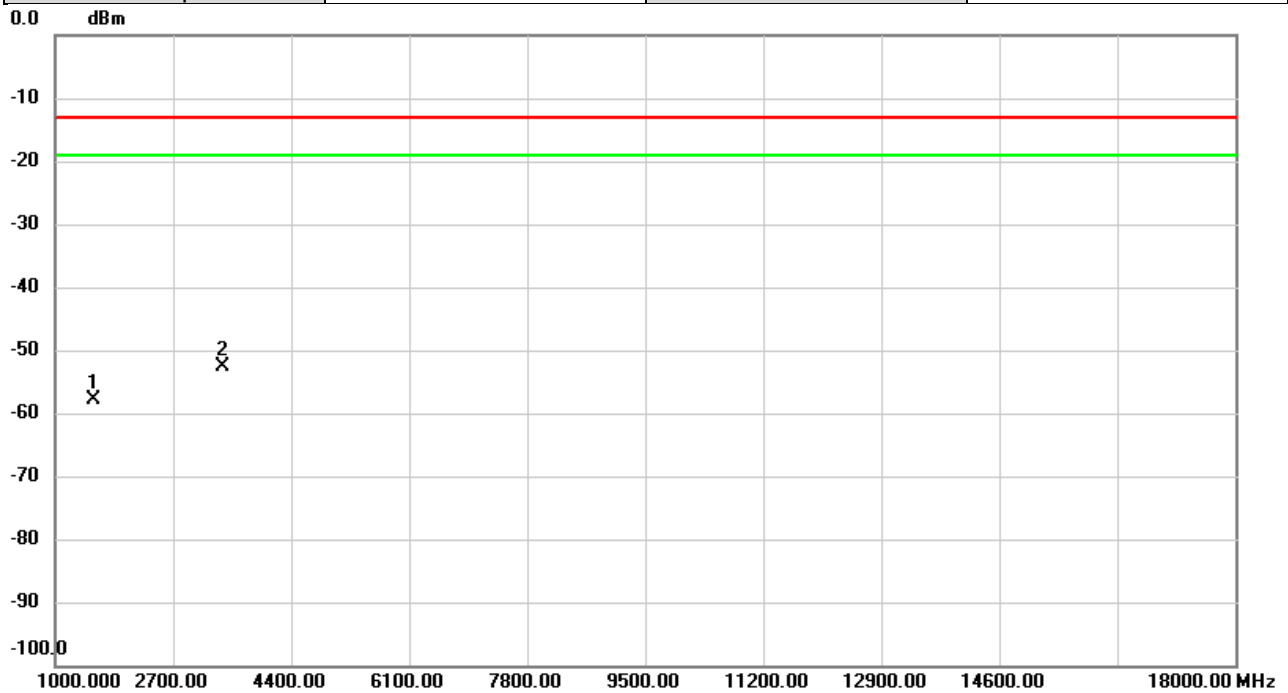


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.24	4.39	-57.85	-13.00	-44.85	peak	
2	*	3422.000	-62.43	9.71	-52.72	-13.00	-39.72	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

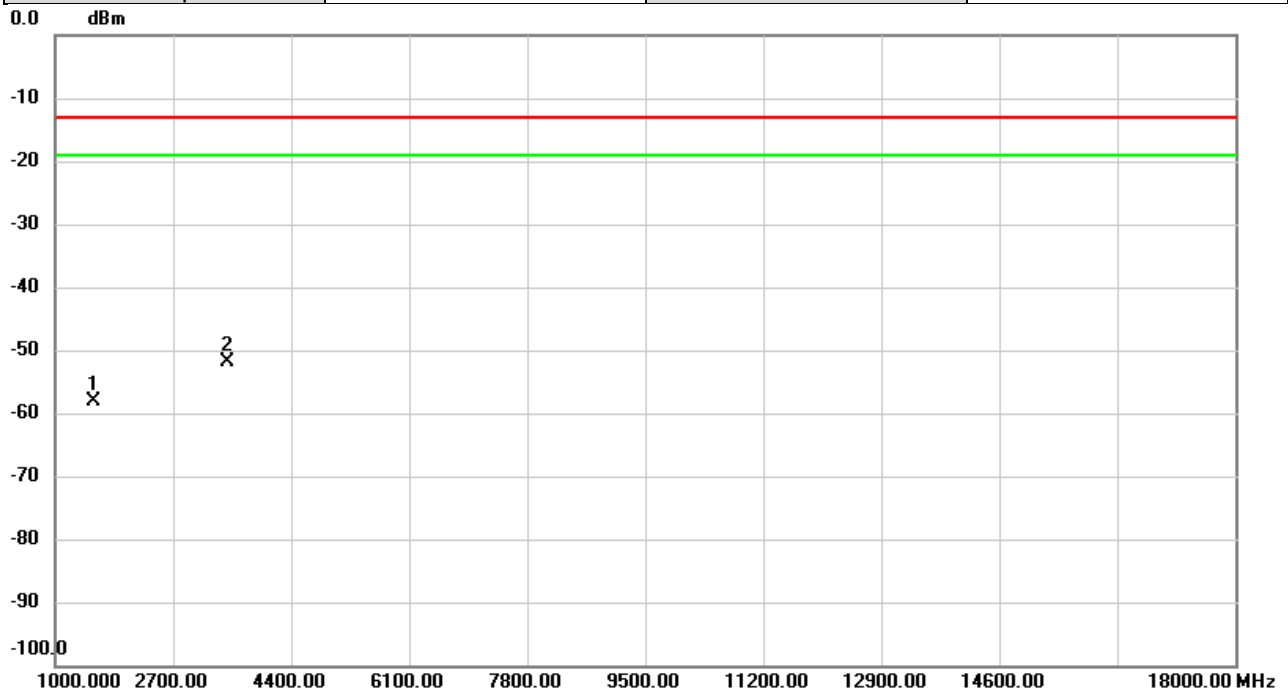


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-62.62	4.60	-58.02	-13.00	-45.02	peak	
2	*	3472.000	-62.09	10.26	-51.83	-13.00	-38.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

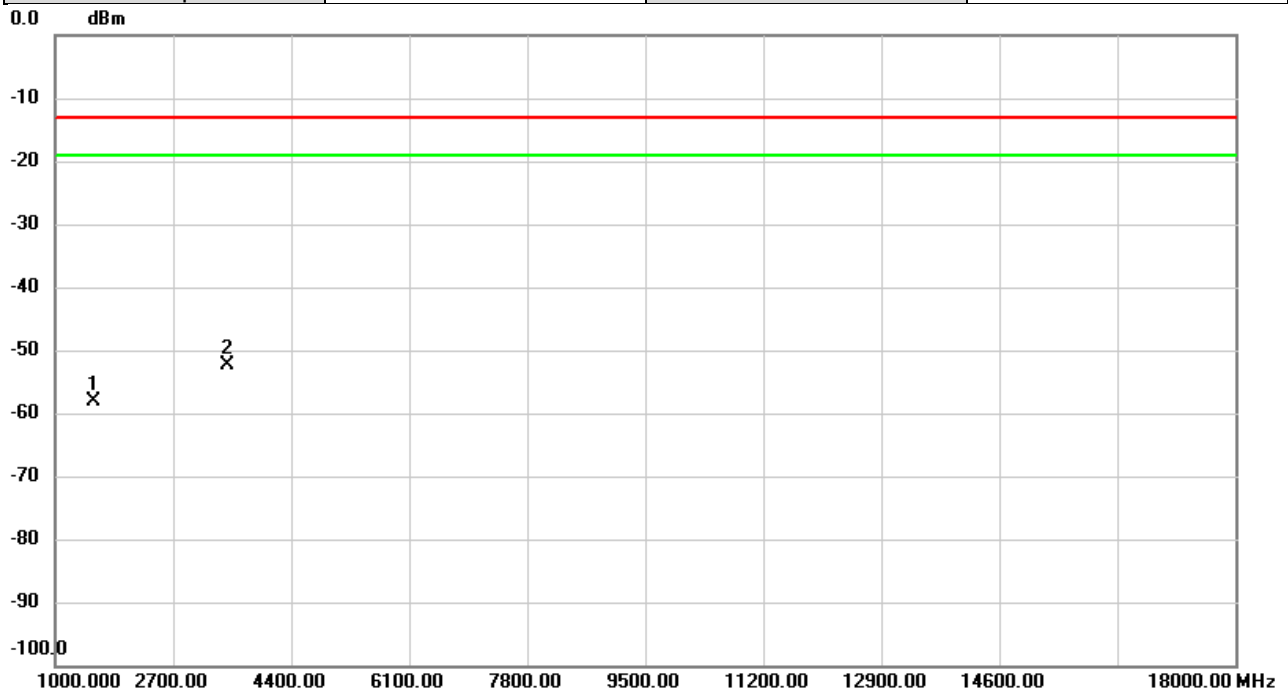


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-62.44	4.44	-58.00	-13.00	-45.00	peak	
2	*	3472.000	-62.33	10.02	-52.31	-13.00	-39.31	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

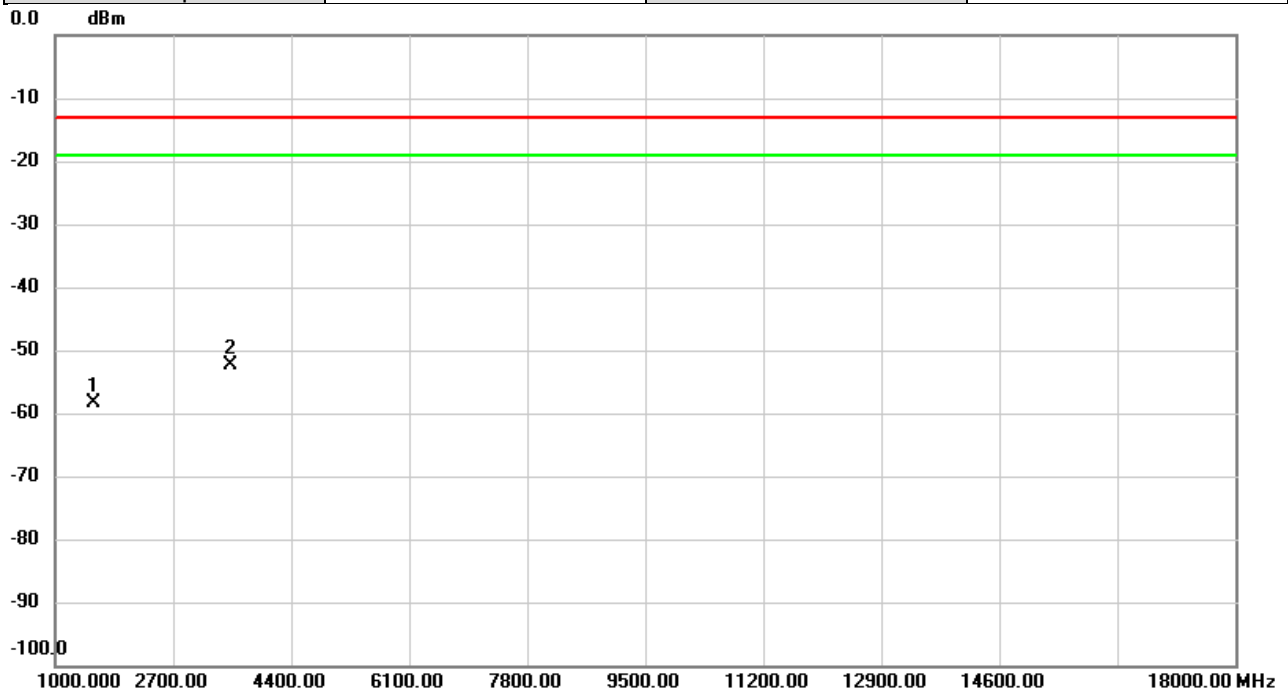


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-62.95	4.64	-58.31	-13.00	-45.31	peak	
2	*	3522.000	-62.69	10.26	-52.43	-13.00	-39.43	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_13A-66A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

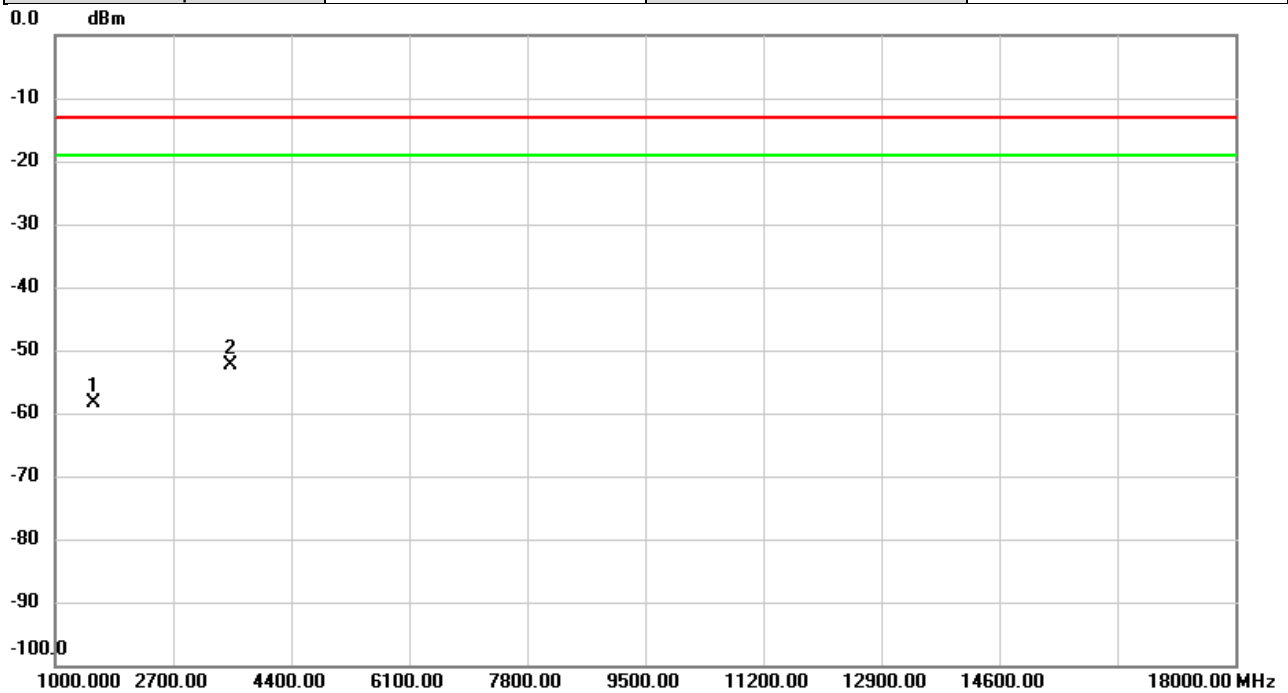


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-62.76	4.49	-58.27	-13.00	-45.27	peak	
2	*	3522.000	-62.25	10.00	-52.25	-13.00	-39.25	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

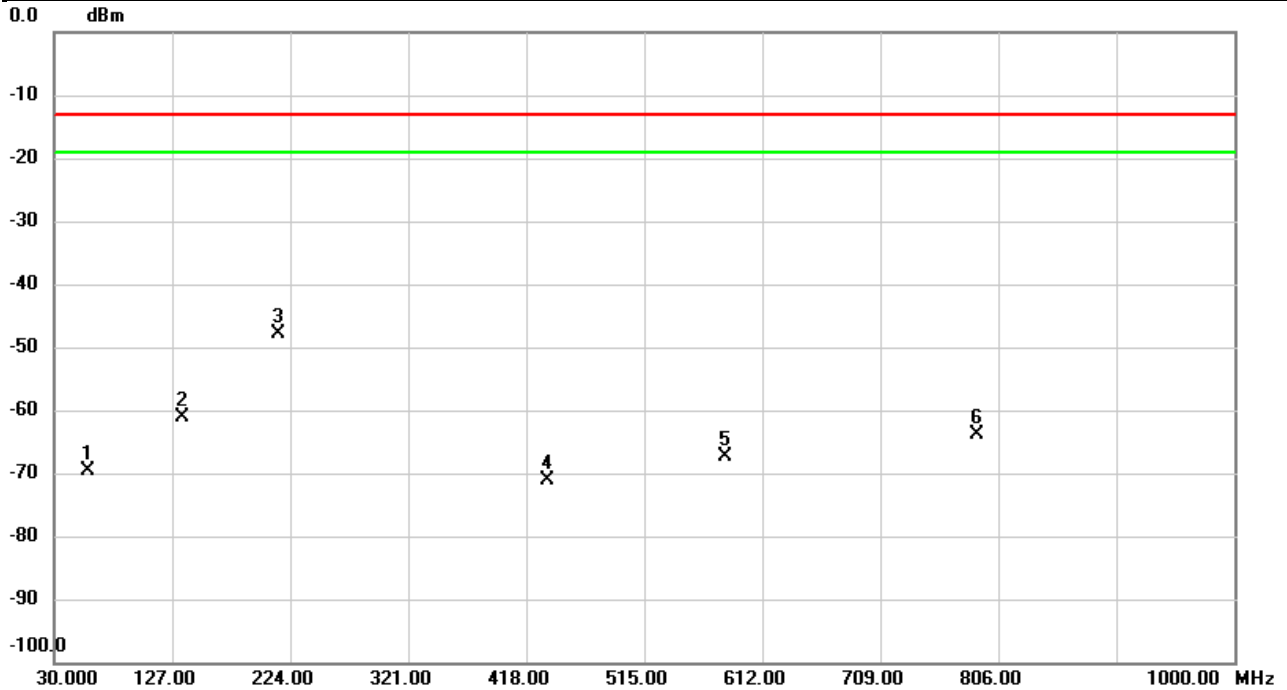


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.1600	-64.32	-5.19	-69.51	-13.00	-56.51	peak	
2		135.2773	-58.97	-2.25	-61.22	-13.00	-48.22	peak	
3	*	213.9443	-46.40	-1.44	-47.84	-13.00	-34.84	peak	
4		434.8780	-71.55	0.55	-71.00	-13.00	-58.00	peak	
5		582.1240	-72.71	5.26	-67.45	-13.00	-54.45	peak	
6		788.2490	-69.98	5.99	-63.99	-13.00	-50.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

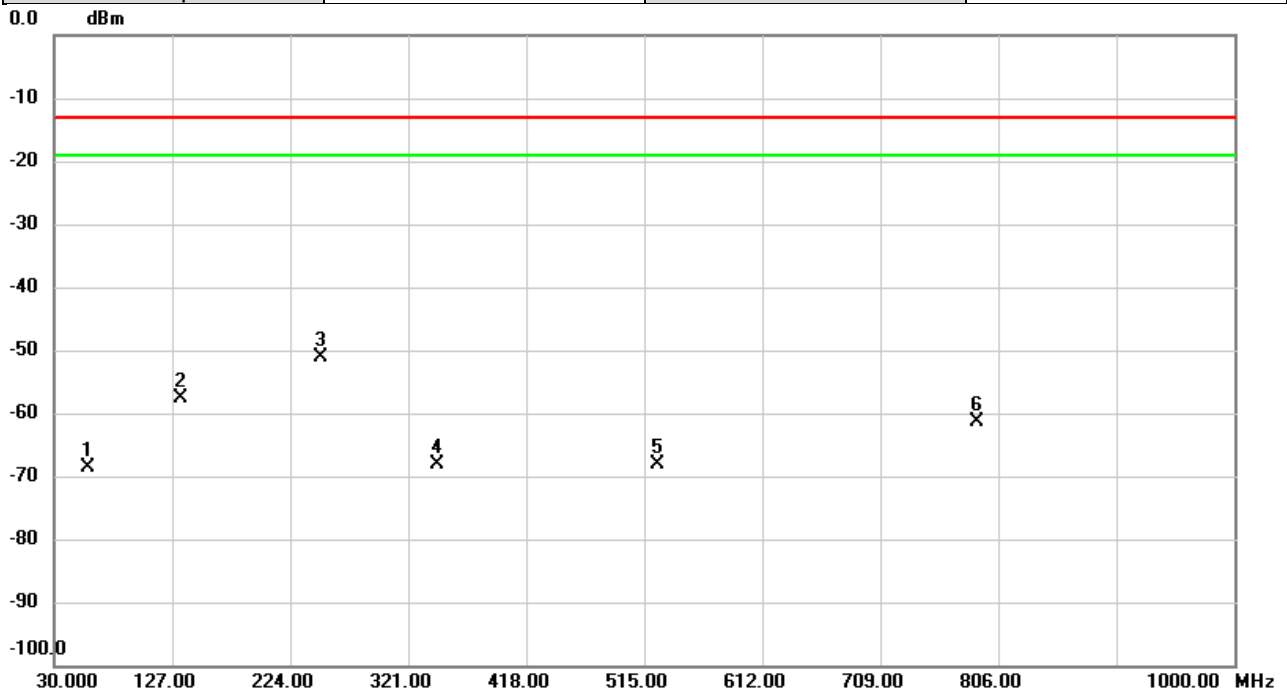


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.4510	-67.66	-1.04	-68.70	-13.00	-55.70	peak	
2		134.6305	-53.74	-4.00	-57.74	-13.00	-44.74	peak	
3	*	249.8666	-45.19	-5.92	-51.11	-13.00	-38.11	peak	
4		345.2500	-67.48	-0.75	-68.23	-13.00	-55.23	peak	
5		525.5082	-69.20	1.13	-68.07	-13.00	-55.07	peak	
6		788.2490	-67.38	6.06	-61.32	-13.00	-48.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

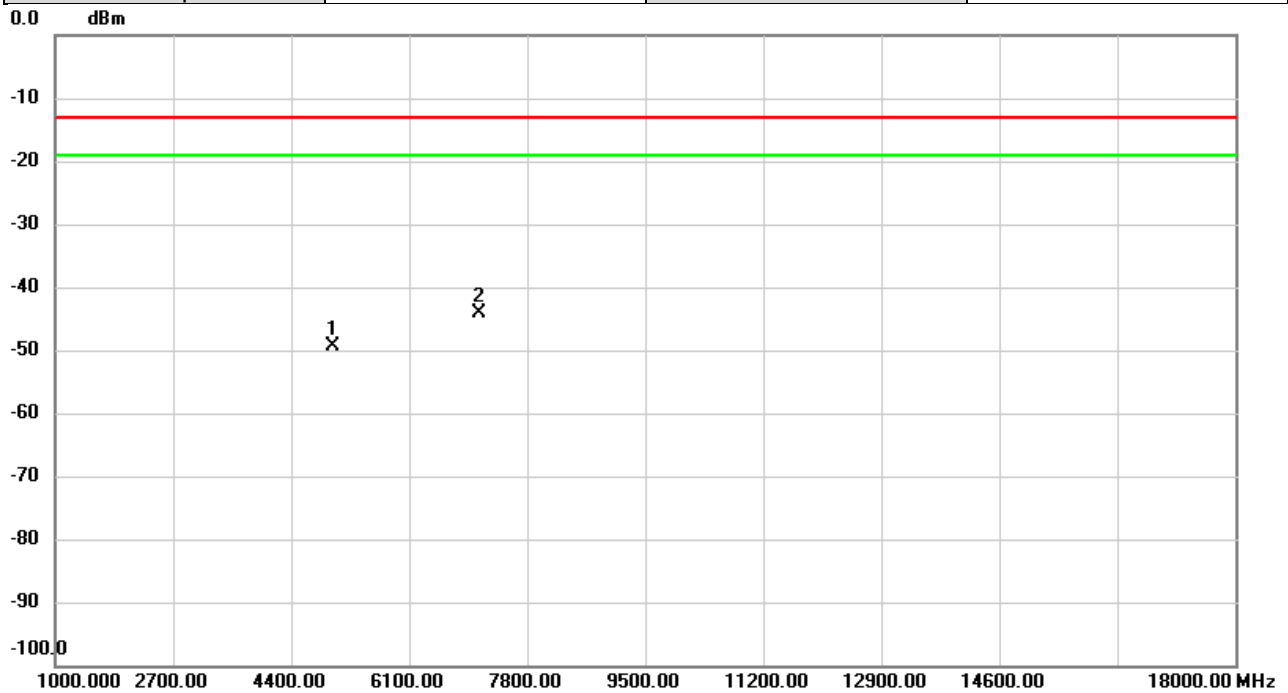


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		4994.000	-62.94	13.55	-49.39	-13.00	-36.39	peak	
2	*	7102.000	-62.56	18.46	-44.10	-13.00	-31.10	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

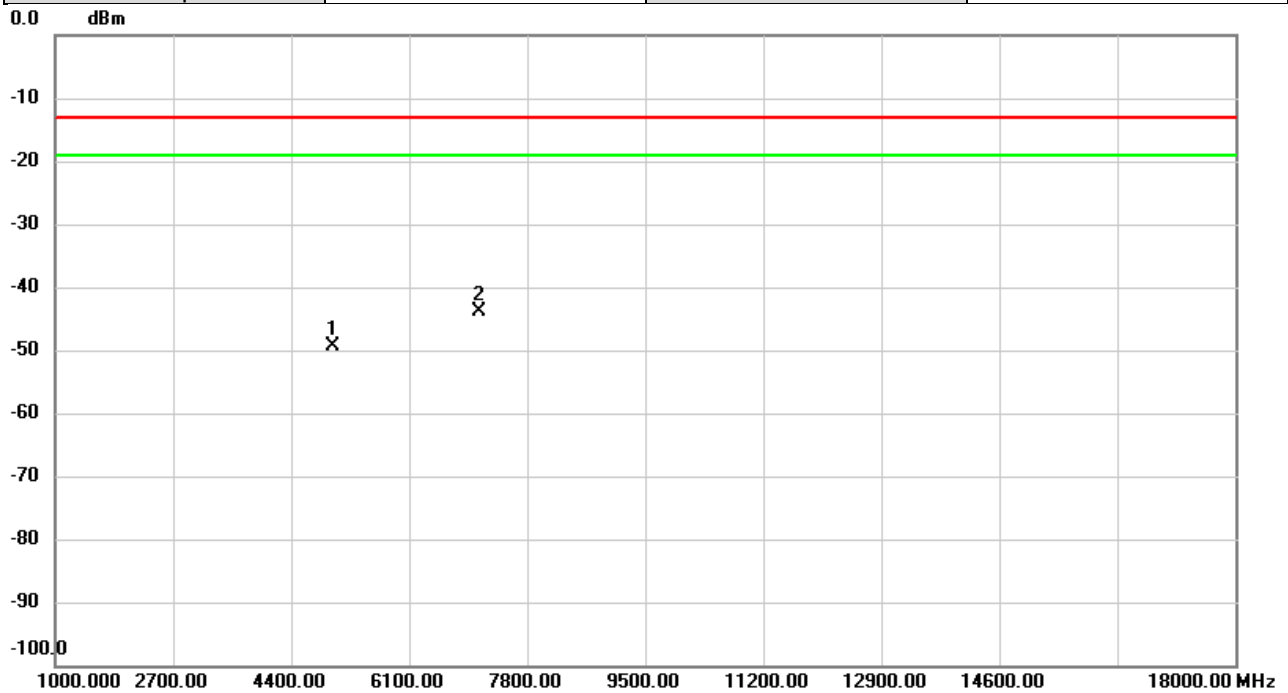


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		4994.000	-62.73	13.29	-49.44	-13.00	-36.44	peak	
2	*	7102.000	-62.26	18.42	-43.84	-13.00	-30.84	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

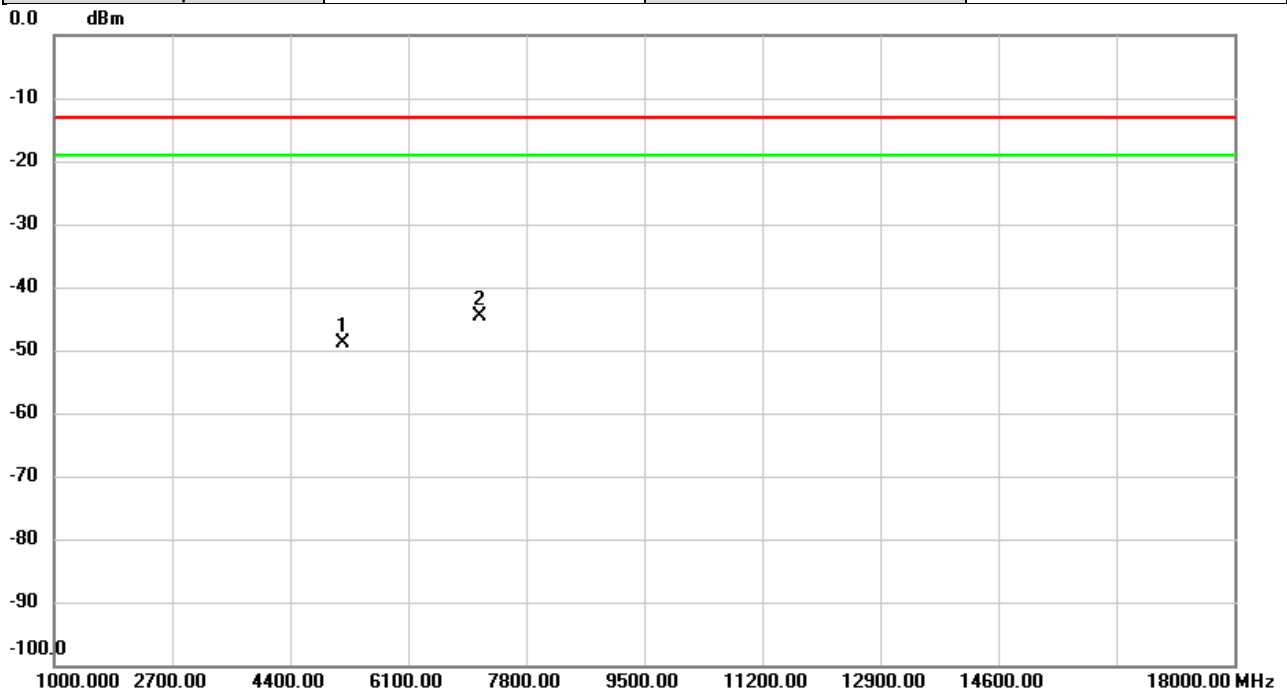


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		5168.000	-62.69	13.72	-48.97	-13.00	-35.97	peak	
2	*	7132.000	-62.77	18.09	-44.68	-13.00	-31.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

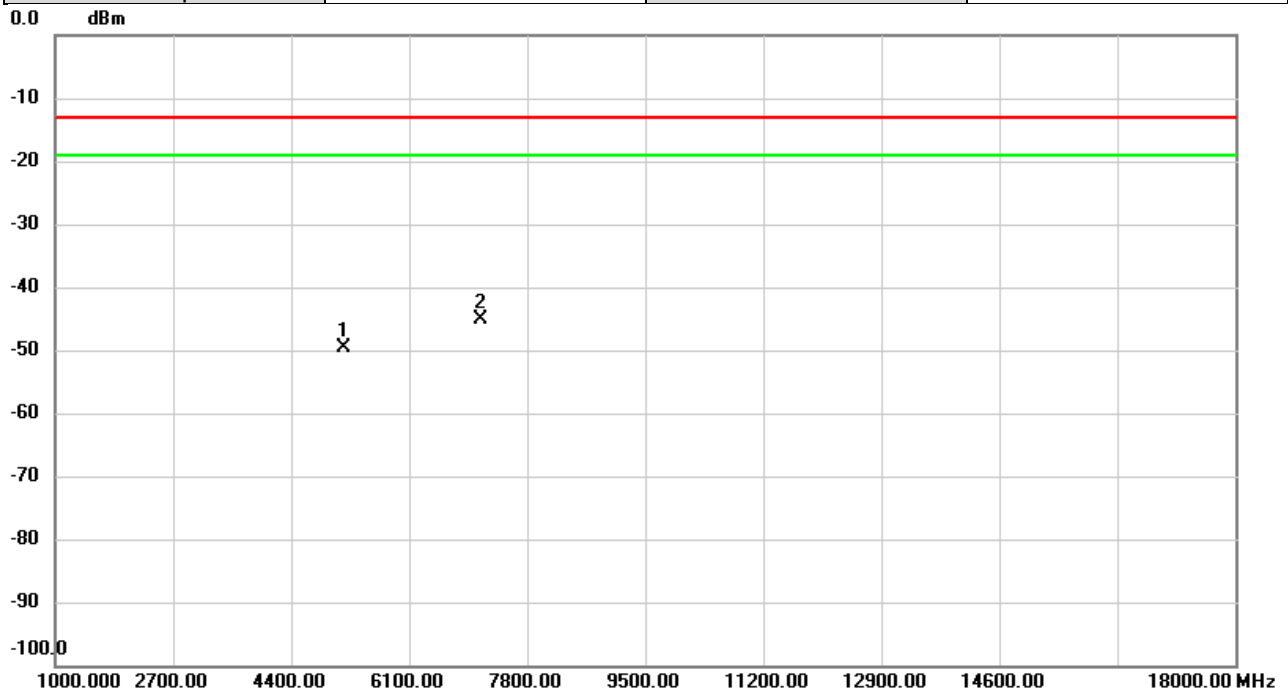


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		5168.000	-63.29	13.73	-49.56	-13.00	-36.56	peak	
2	*	7132.000	-63.13	17.96	-45.17	-13.00	-32.17	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

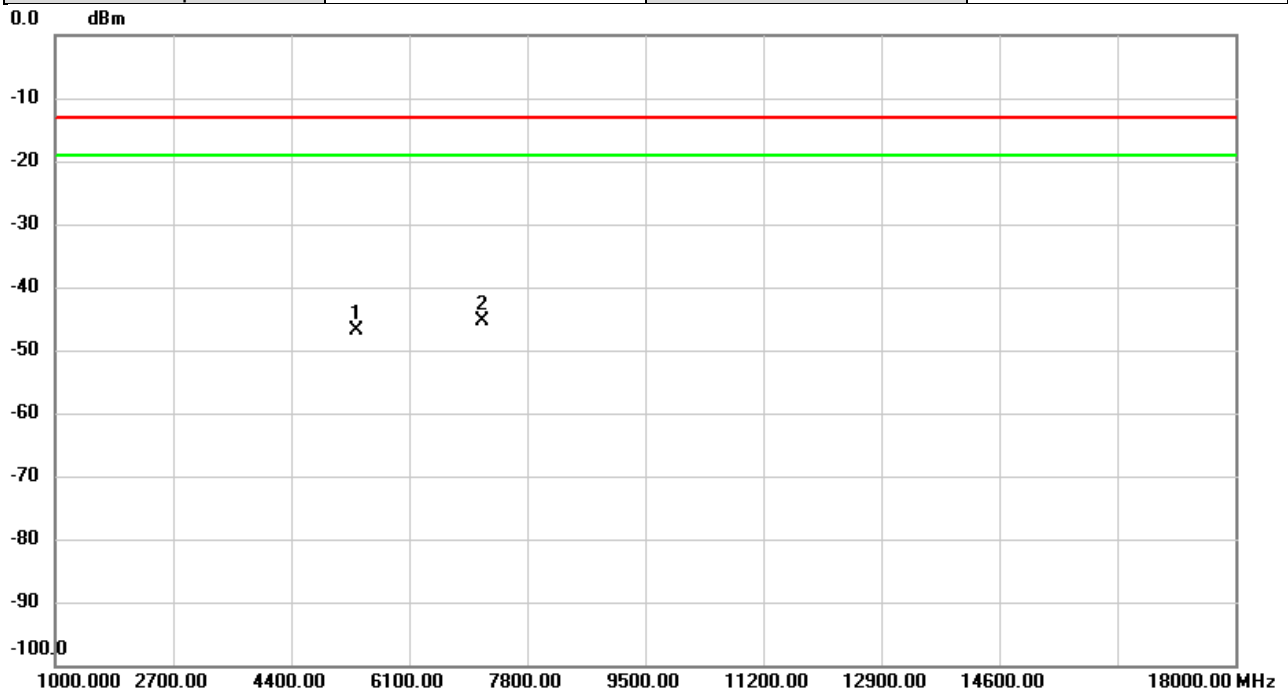


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		5342.000	-61.01	14.10	-46.91	-13.00	-33.91	peak	
2	*	7162.000	-63.24	17.90	-45.34	-13.00	-32.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

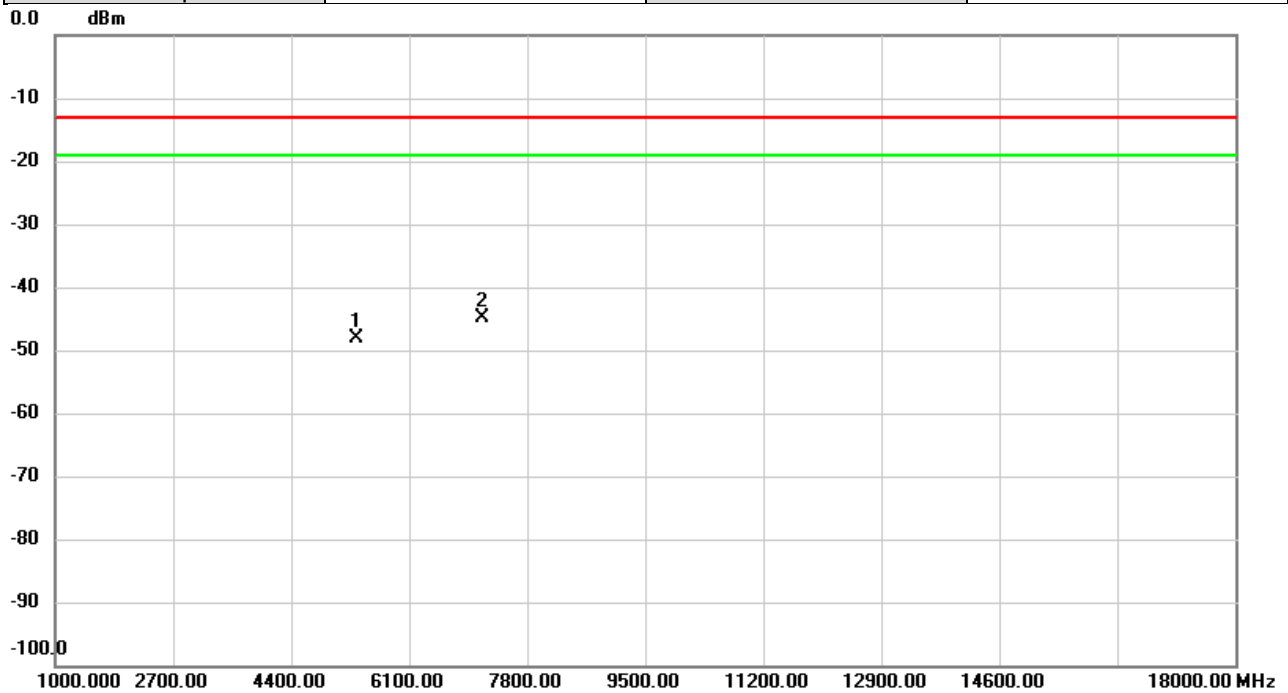


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		5342.000	-62.02	13.78	-48.24	-13.00	-35.24	peak	
2	*	7162.000	-62.54	17.73	-44.81	-13.00	-31.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

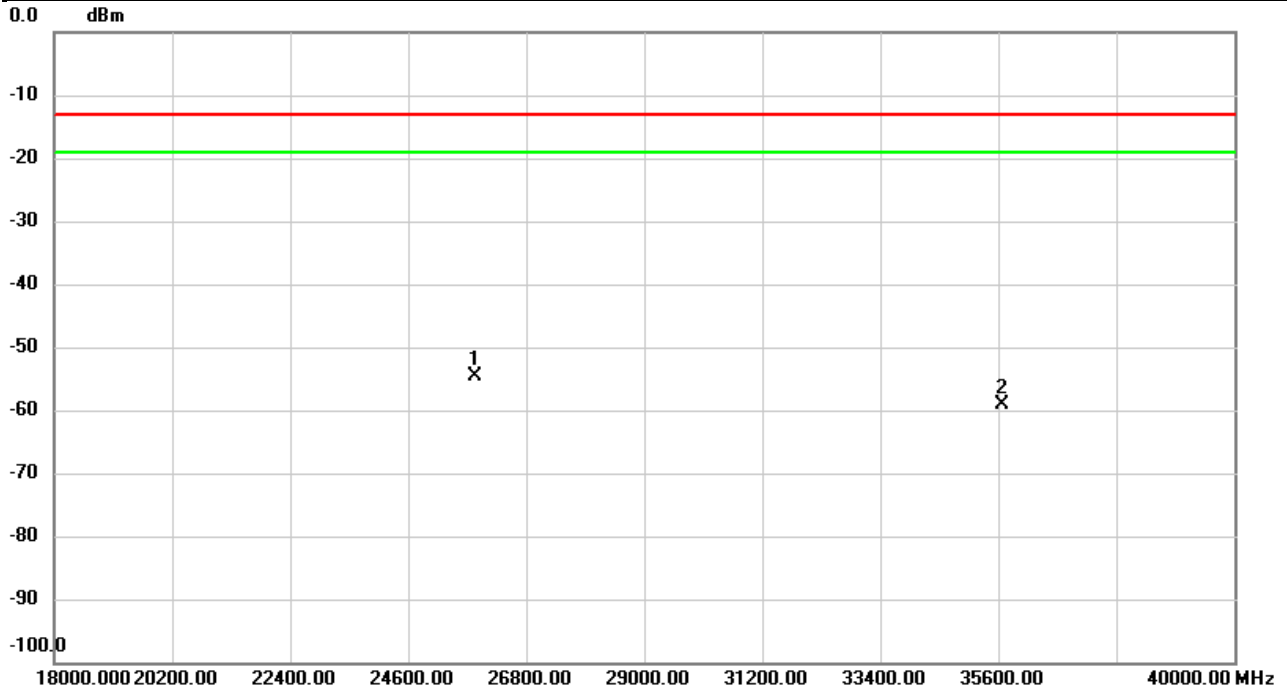


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25840.00	-57.18	2.49	-54.69	-13.00	-41.69	peak	
2		35660.00	-54.15	-5.02	-59.17	-13.00	-46.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41A-42A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

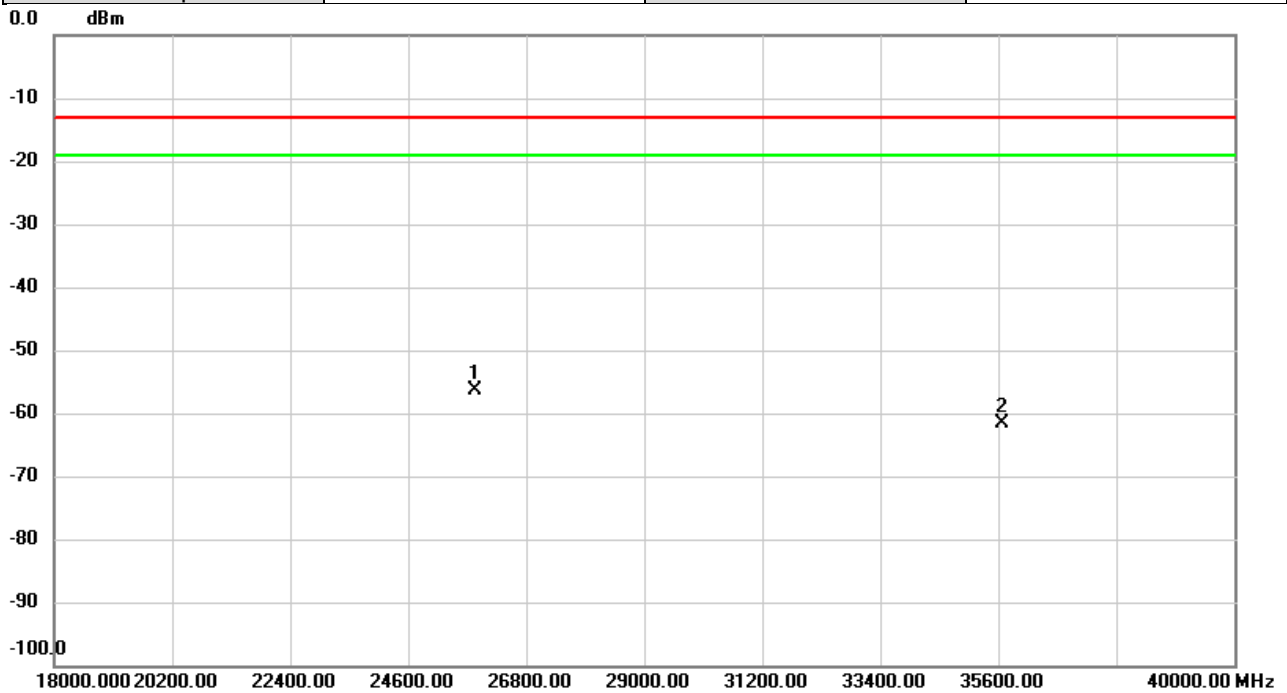


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25840.00	-57.41	1.00	-56.41	-13.00	-43.41	peak	
2		35660.00	-55.26	-6.38	-61.64	-13.00	-48.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

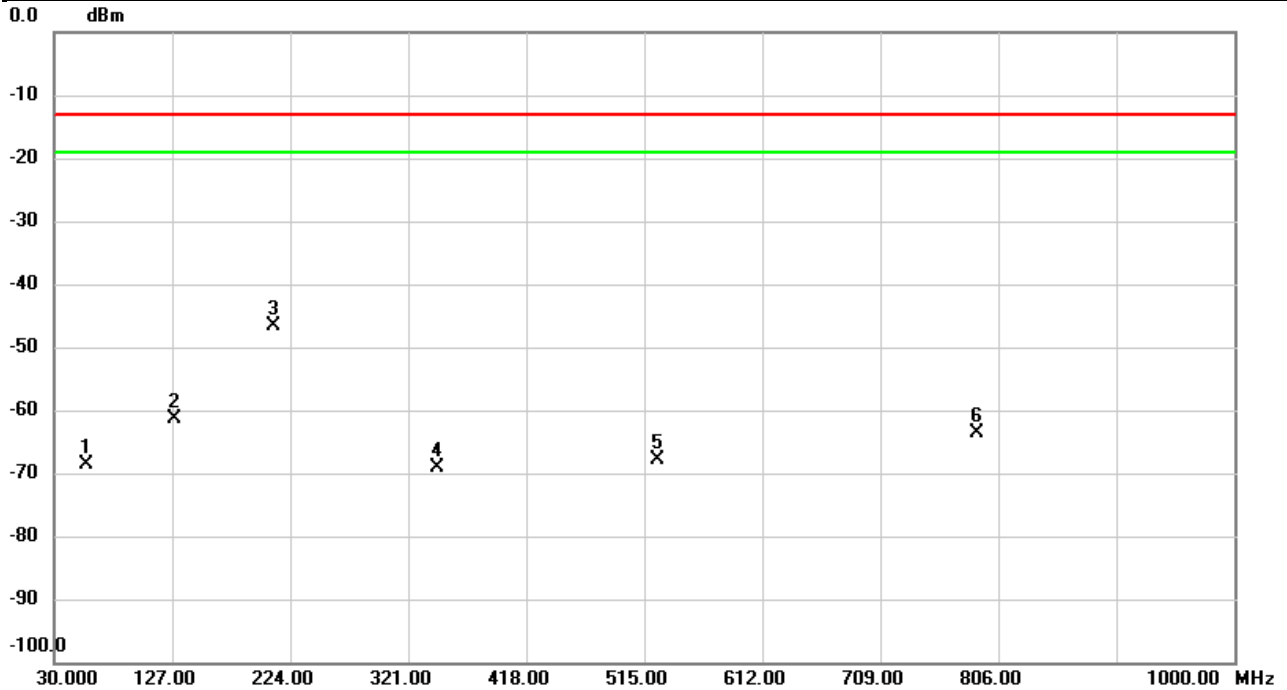


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		57.0307	-63.38	-5.17	-68.55	-13.00	-55.55	peak	
2		129.1663	-57.90	-3.56	-61.46	-13.00	-48.46	peak	
3	*	210.8080	-45.35	-1.29	-46.64	-13.00	-33.64	peak	
4		345.3147	-68.21	-0.79	-69.00	-13.00	-56.00	peak	
5		525.5082	-71.54	3.63	-67.91	-13.00	-54.91	peak	
6		788.2490	-69.69	5.99	-63.70	-13.00	-50.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

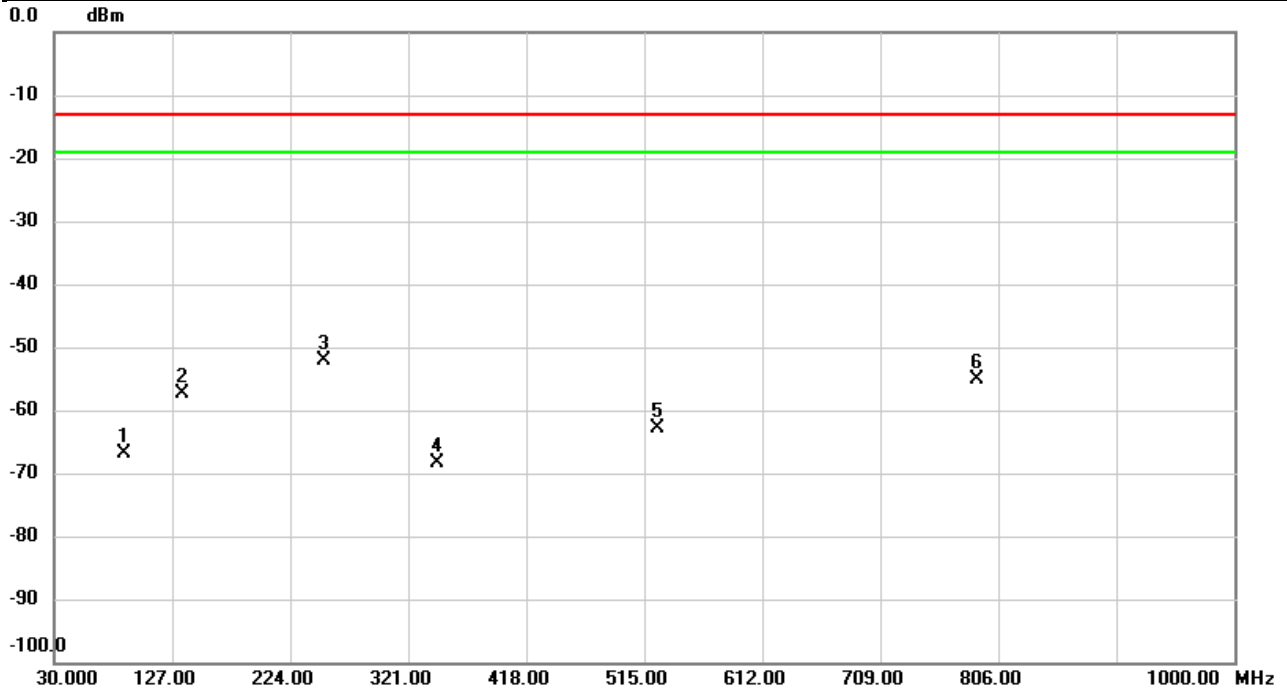


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.1030	-60.68	-6.17	-66.85	-13.00	-53.85	peak	
2		135.1803	-53.42	-3.95	-57.37	-13.00	-44.37	peak	
3	*	252.4210	-46.28	-5.83	-52.11	-13.00	-39.11	peak	
4		345.4763	-67.68	-0.73	-68.41	-13.00	-55.41	peak	
5		525.5082	-63.89	1.13	-62.76	-13.00	-49.76	peak	
6		788.2490	-61.18	6.06	-55.12	-13.00	-42.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

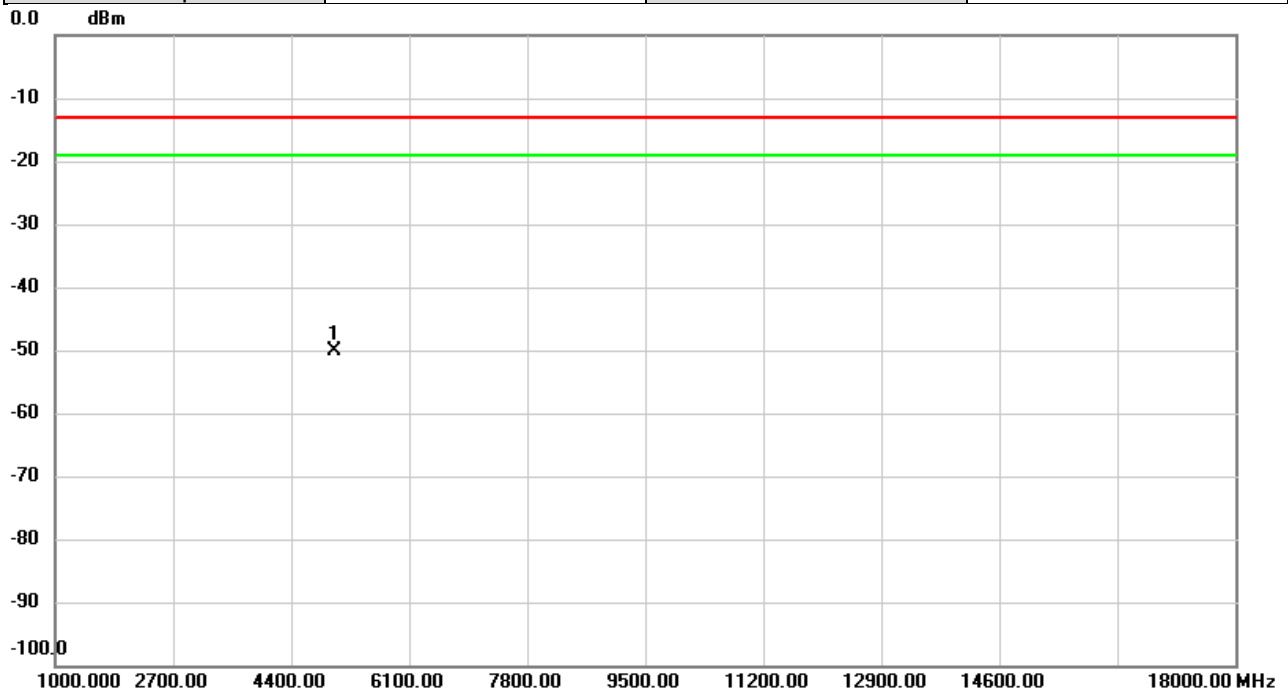


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5012.000	-63.80	13.71	-50.09	-13.00	-37.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

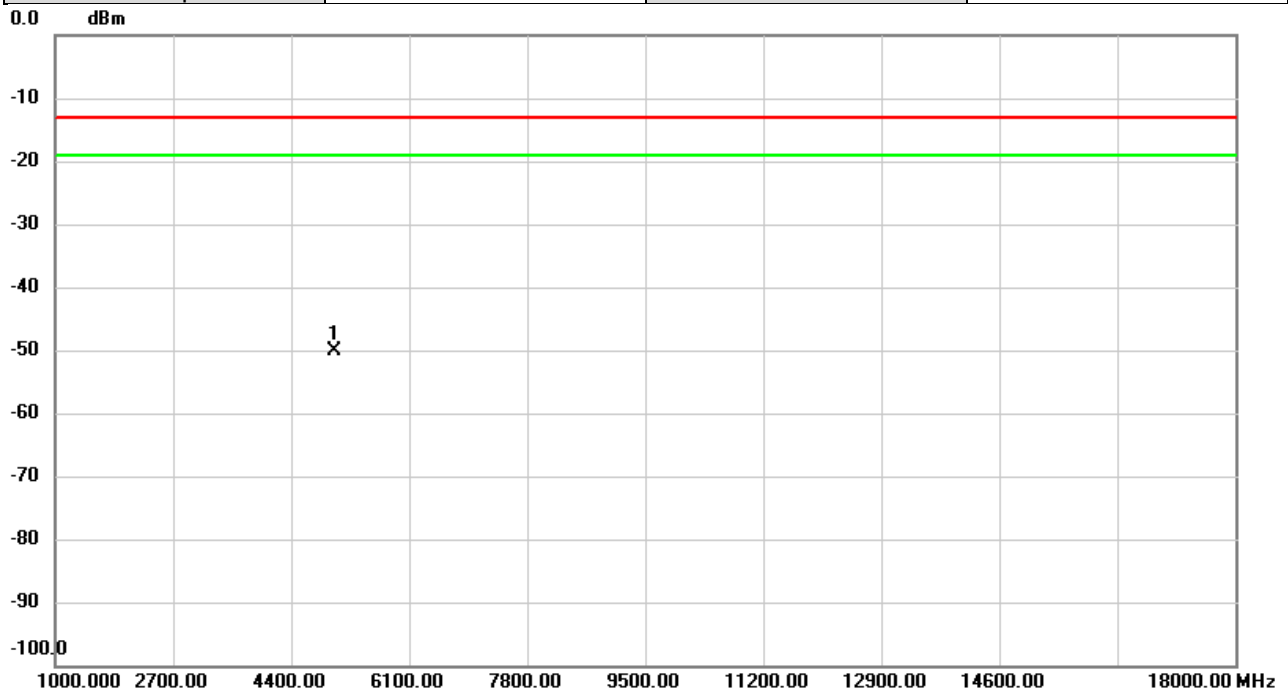


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5012.000	-63.47	13.47	-50.00	-13.00	-37.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

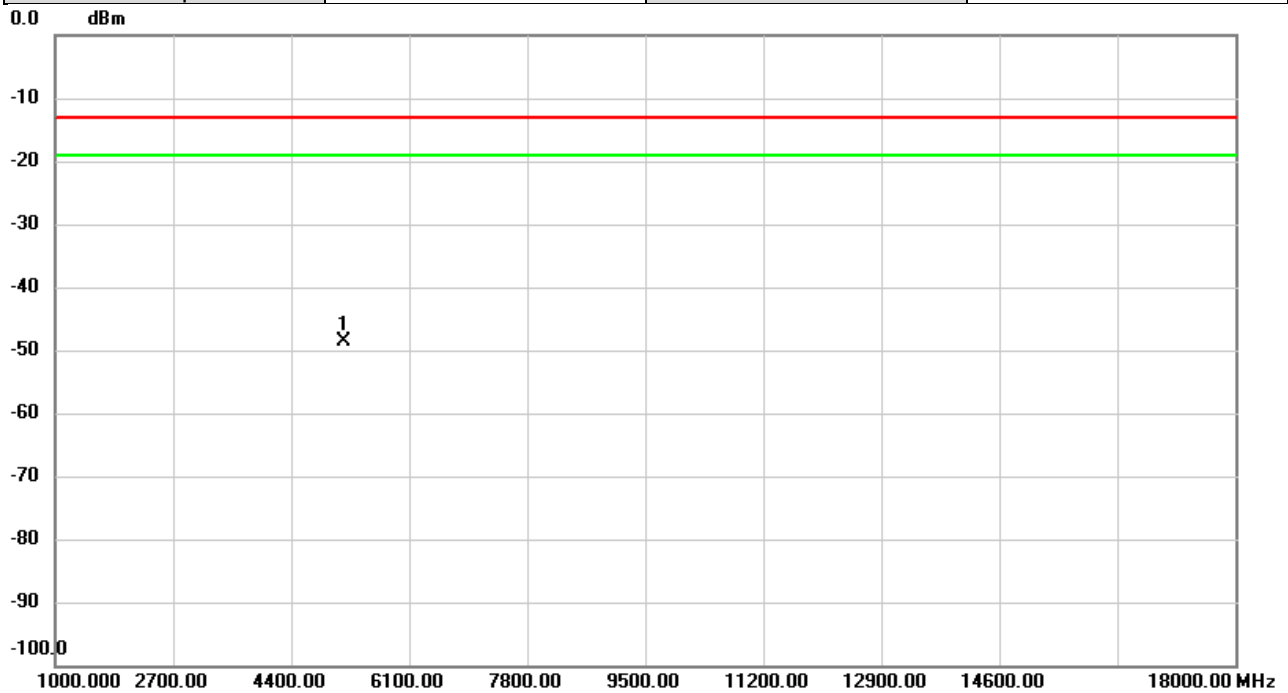


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5166.000	-62.44	13.73	-48.71	-13.00	-35.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

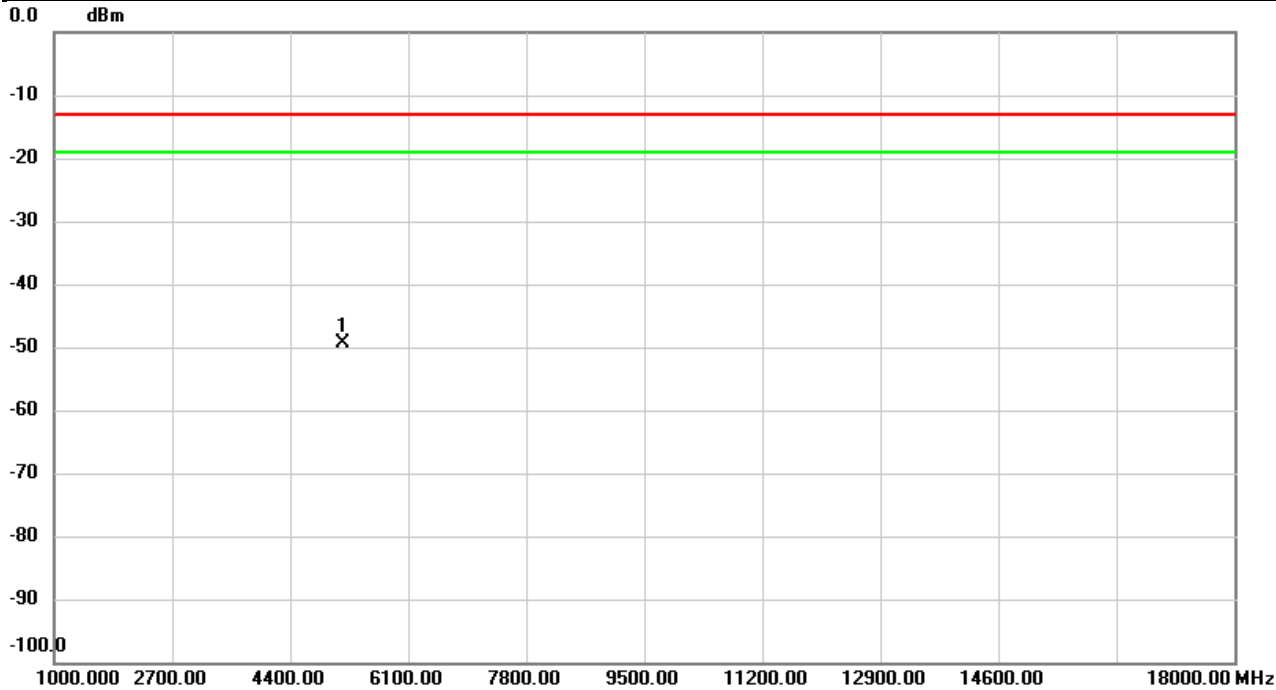

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5166.000	-63.08	13.75	-49.33	-13.00	-36.33	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 41C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5320.000	-62.42	13.84	-48.58	-13.00	-35.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 41C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

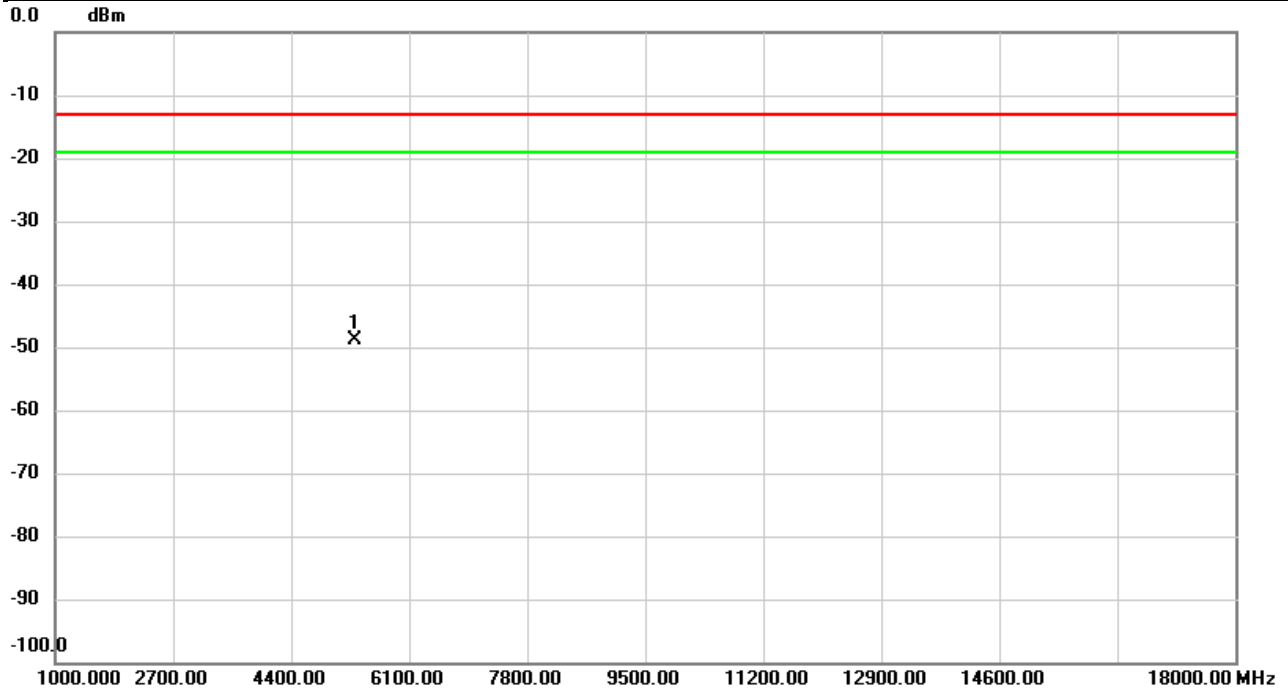


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5320.000	-62.48	13.63	-48.85	-13.00	-35.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

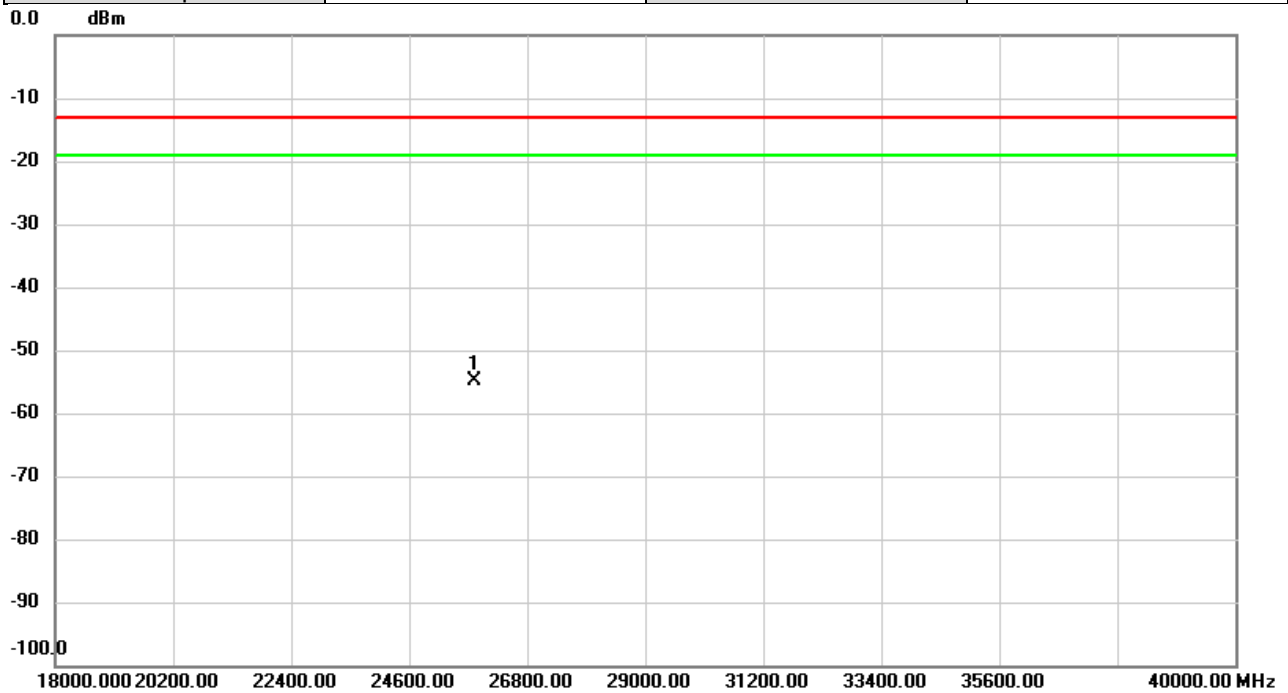


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25830.00	-57.43	2.51	-54.92	-13.00	-41.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_41C	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

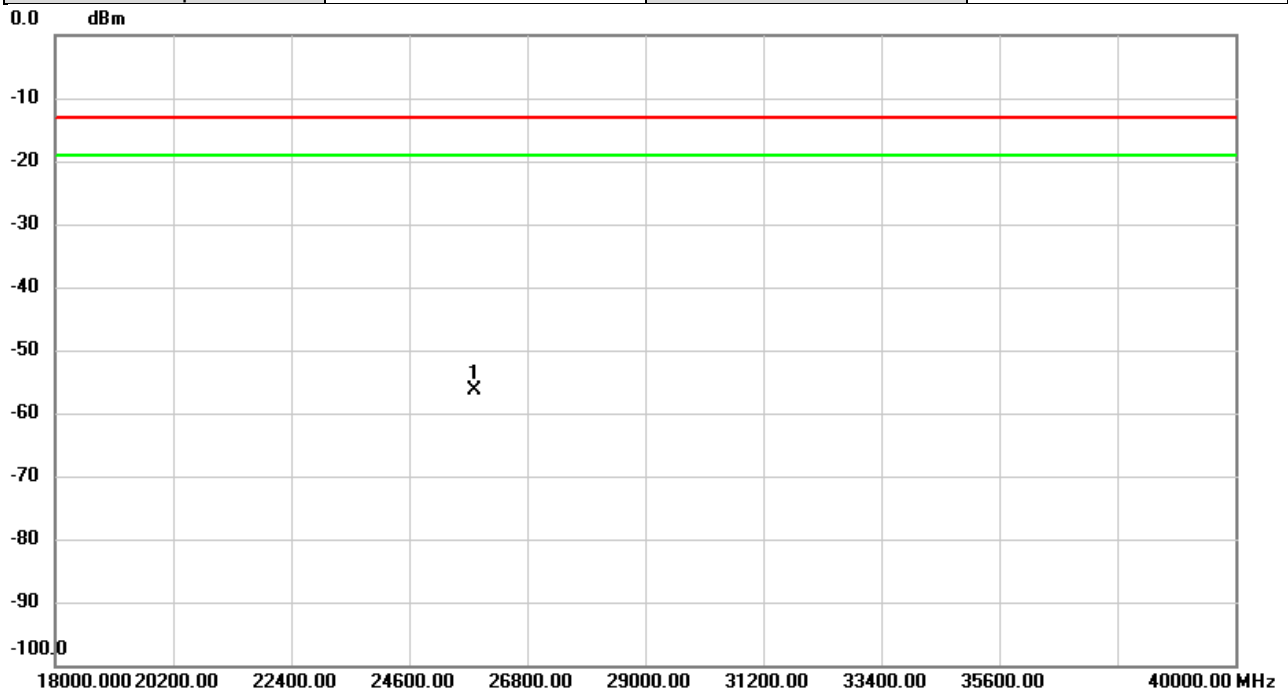


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	25830.00	-57.43	1.03	-56.40	-13.00	-43.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

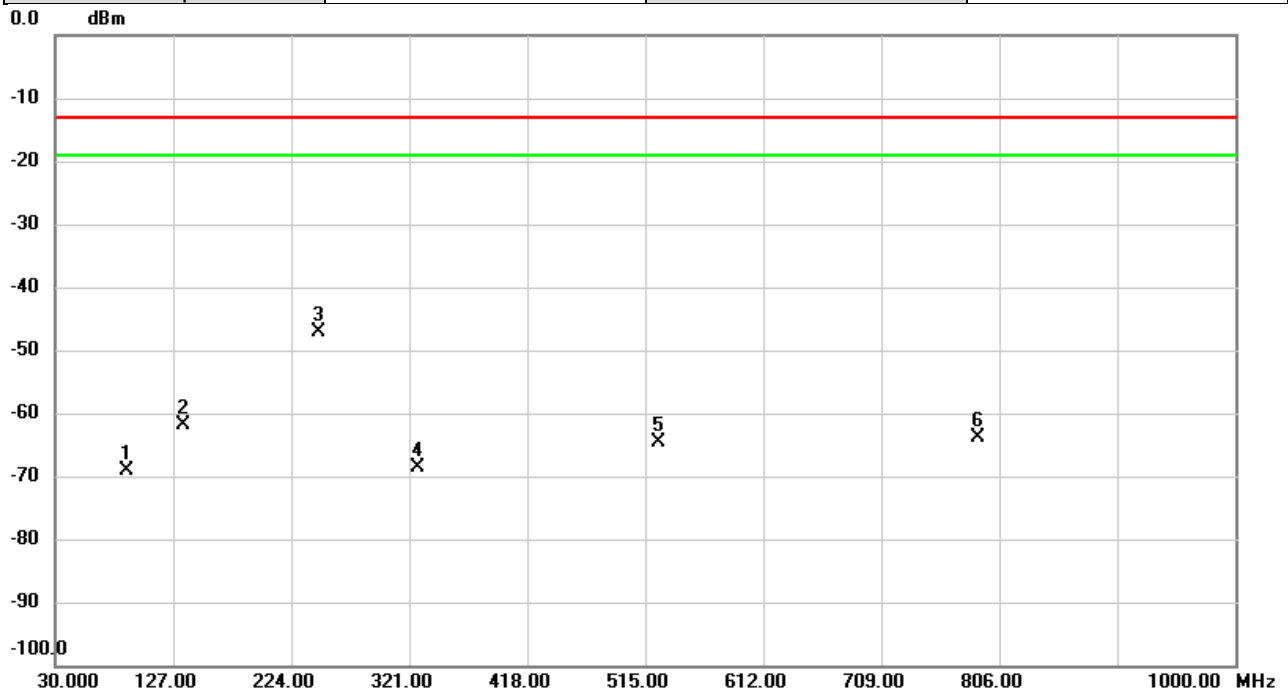


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		88.9437	-65.64	-3.42	-69.06	-13.00	-56.06	peak	
2		135.2127	-59.51	-2.27	-61.78	-13.00	-48.78	peak	
3	*	247.1830	-46.47	-0.62	-47.09	-13.00	-34.09	peak	
4		327.5313	-67.67	-0.96	-68.63	-13.00	-55.63	peak	
5		525.4760	-68.31	3.63	-64.68	-13.00	-51.68	peak	
6		788.2490	-69.90	5.99	-63.91	-13.00	-50.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

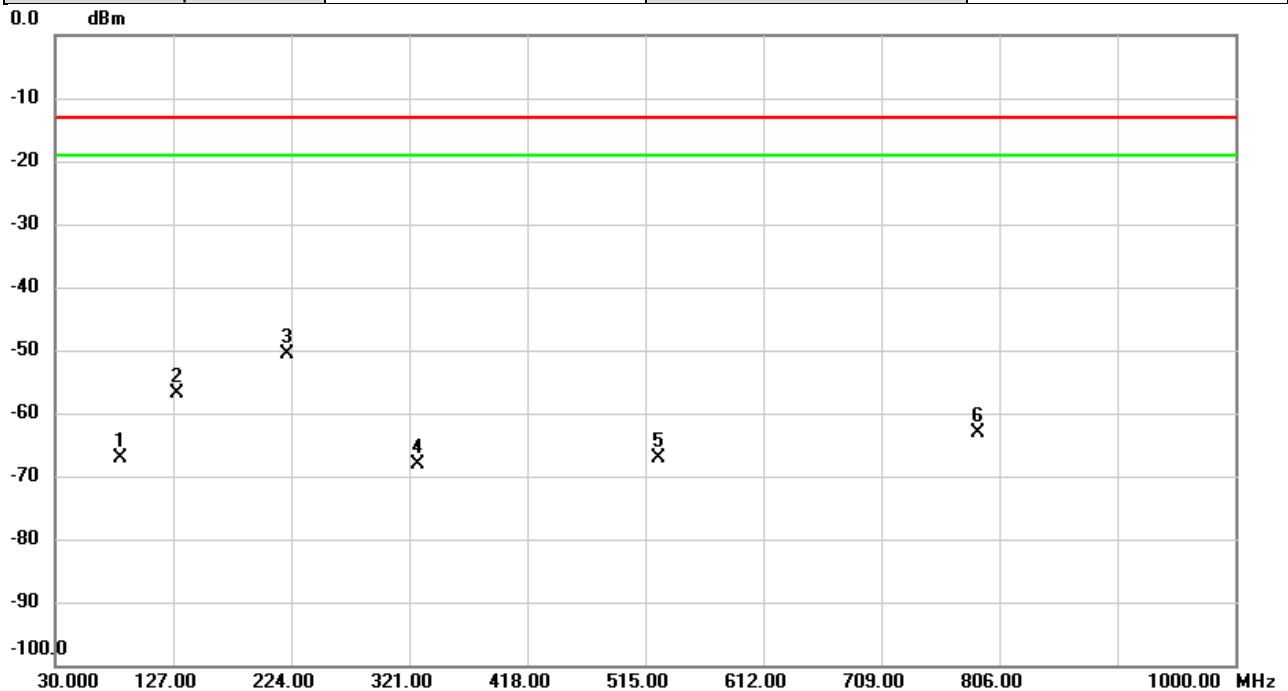


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		83.9320	-61.04	-6.00	-67.04	-13.00	-54.04	peak	
2		130.2980	-52.60	-4.39	-56.99	-13.00	-43.99	peak	
3	*	221.2840	-43.73	-6.84	-50.57	-13.00	-37.57	peak	
4		327.5960	-66.04	-2.04	-68.08	-13.00	-55.08	peak	
5		525.5082	-68.26	1.13	-67.13	-13.00	-54.13	peak	
6		788.2490	-69.17	6.06	-63.11	-13.00	-50.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

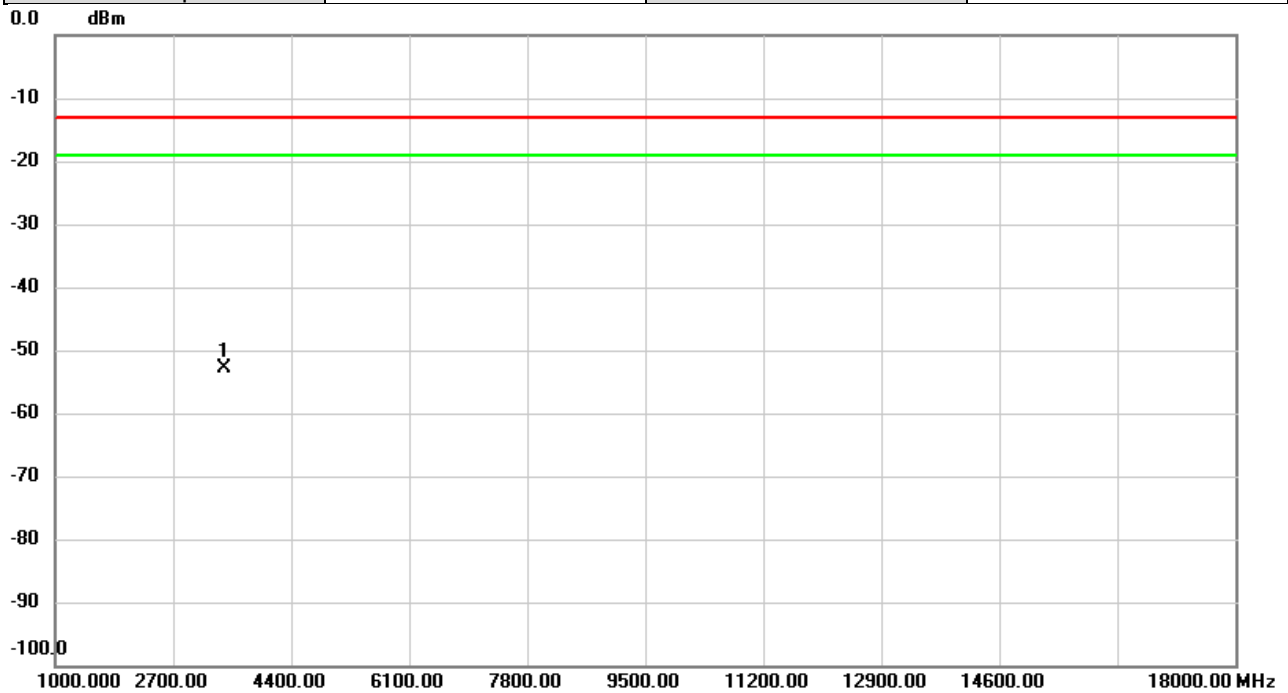


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3430.000	-62.98	10.15	-52.83	-13.00	-39.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

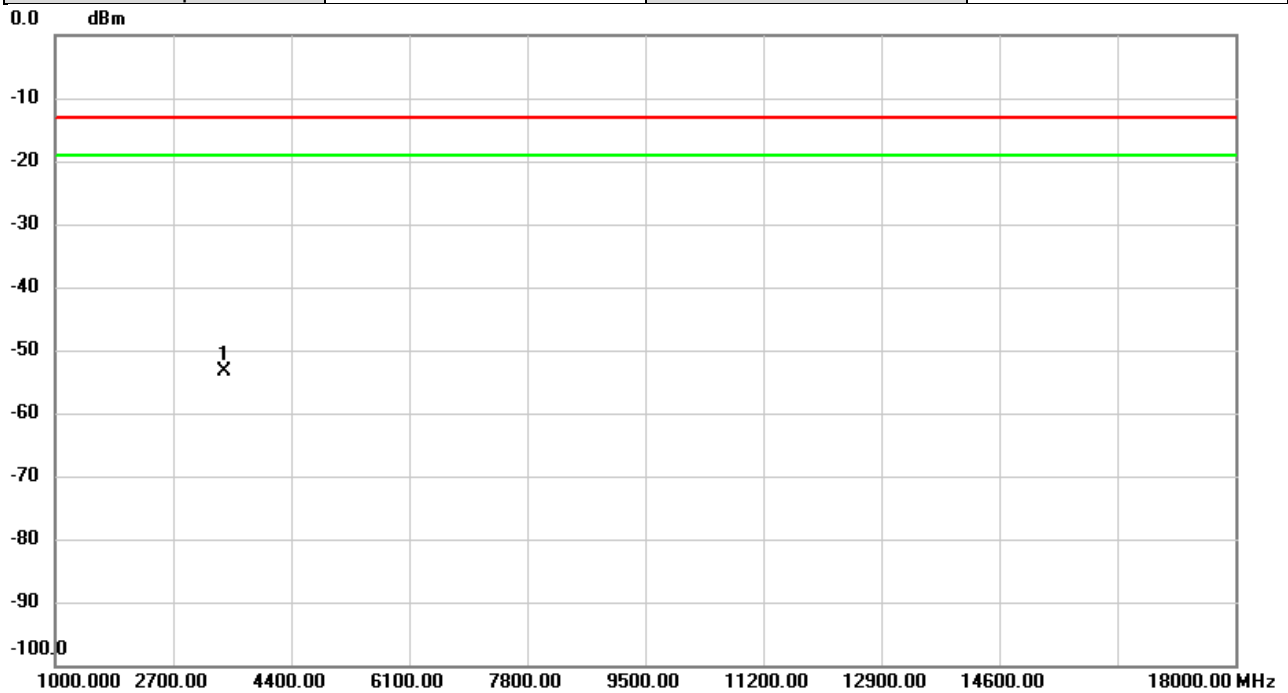


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3430.000	-63.31	9.82	-53.49	-13.00	-40.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

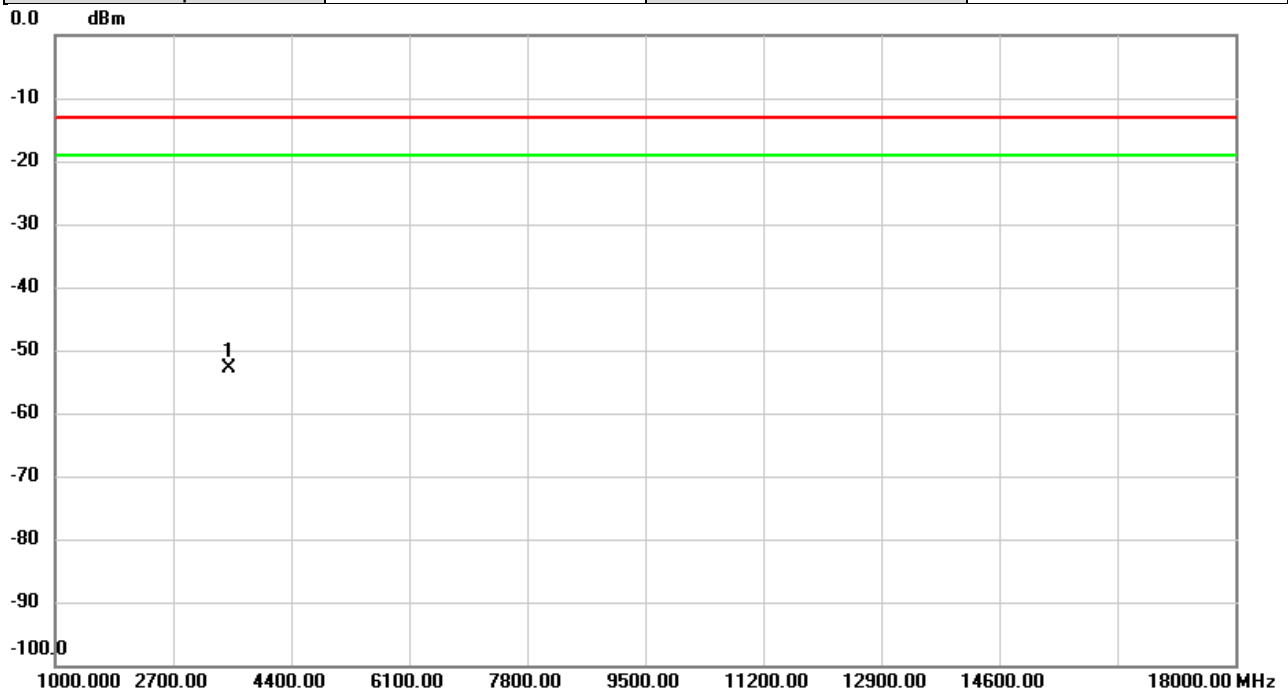


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3500.000	-63.14	10.16	-52.98	-13.00	-39.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66B	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

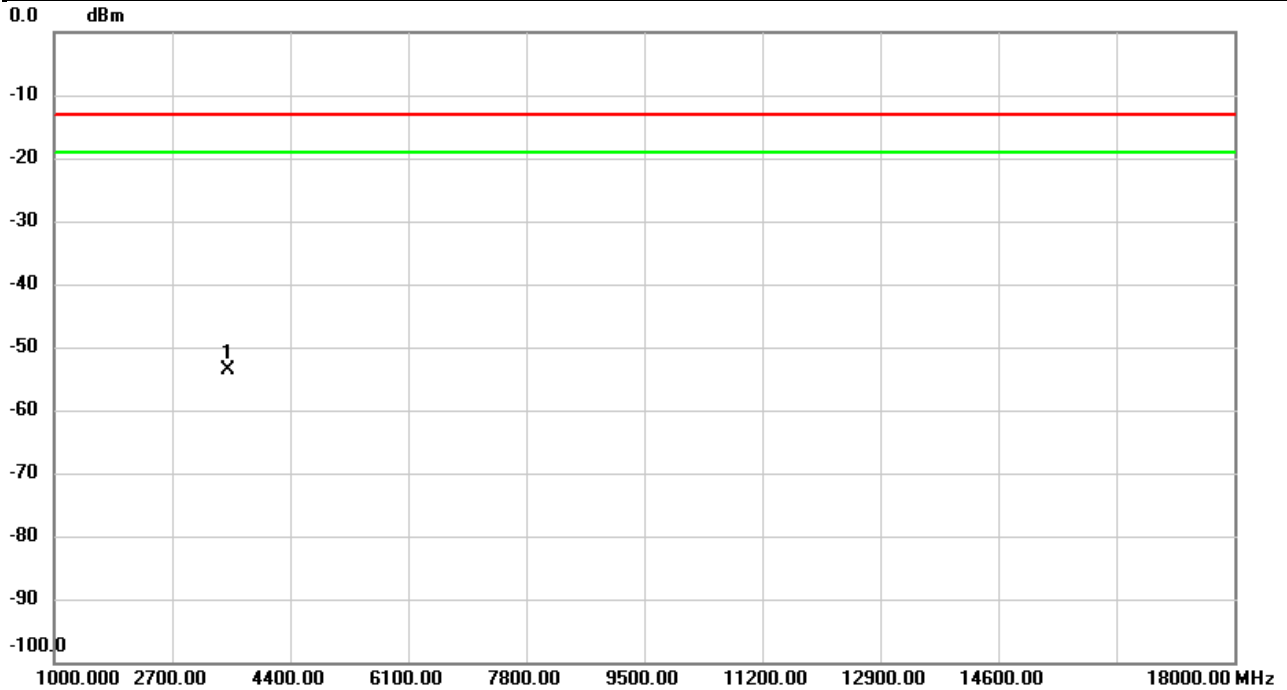


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3500.000	-63.50	9.94	-53.56	-13.00	-40.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66B	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

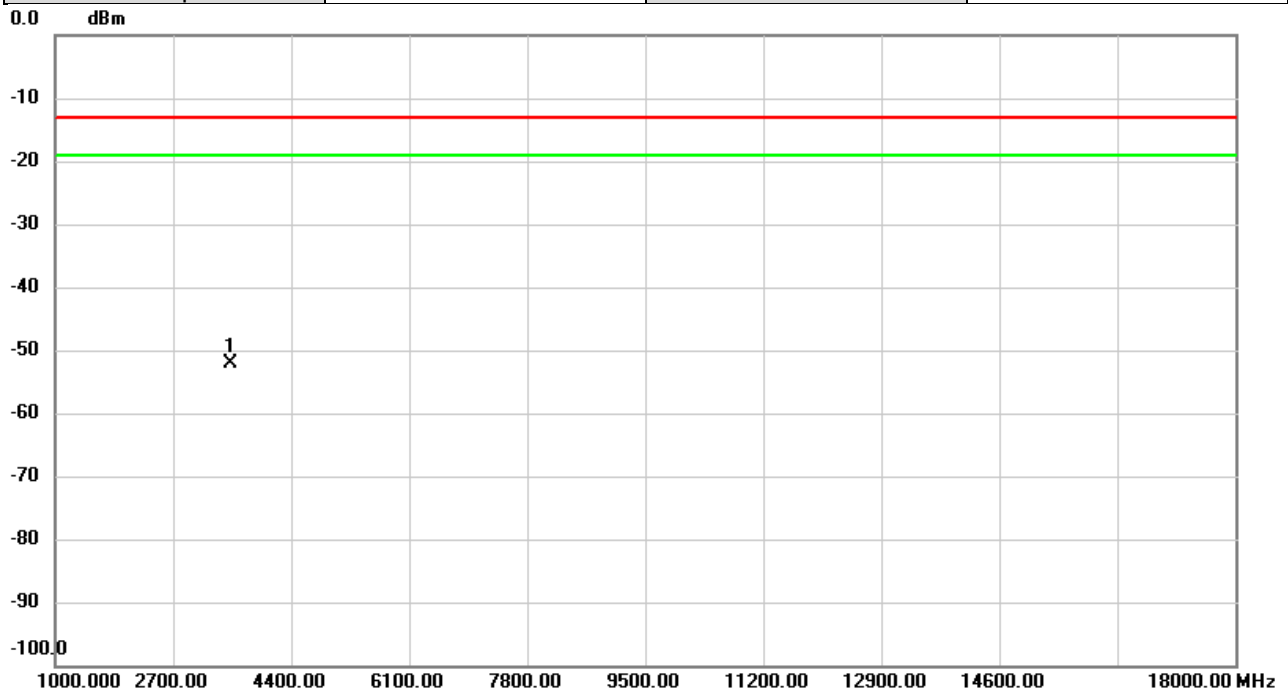


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3530.000	-62.48	10.29	-52.19	-13.00	-39.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66B	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

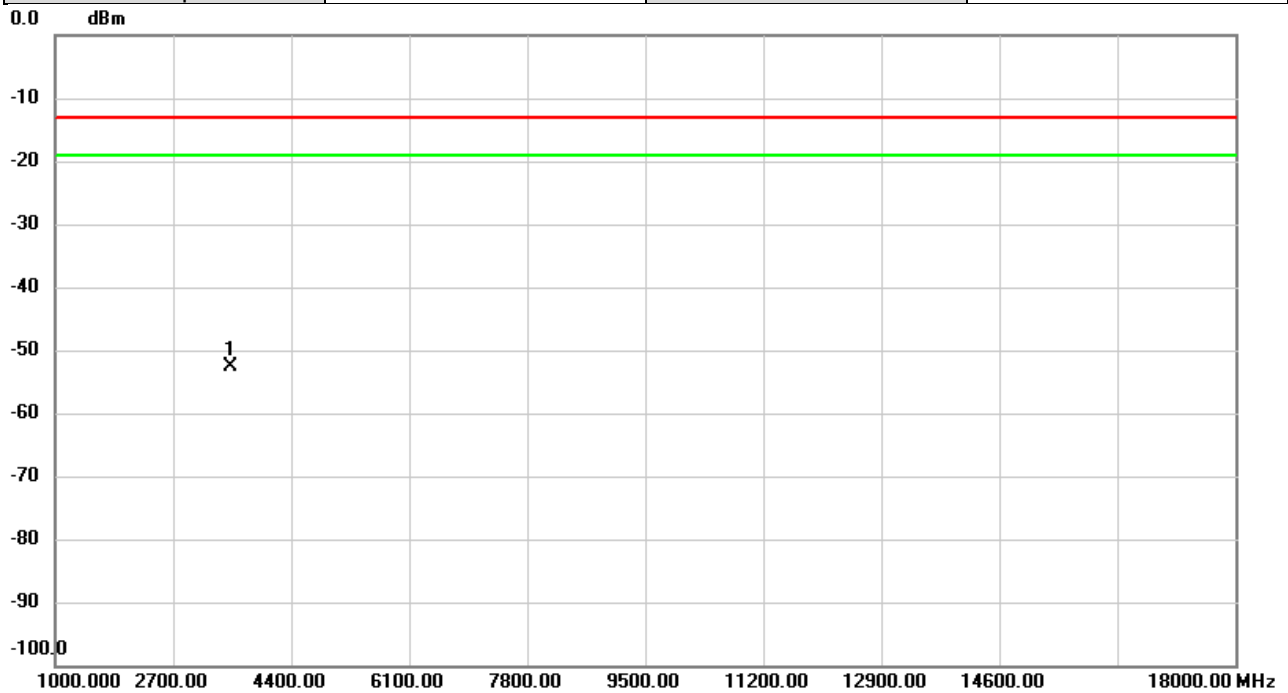


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3530.000	-62.58	10.02	-52.56	-13.00	-39.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

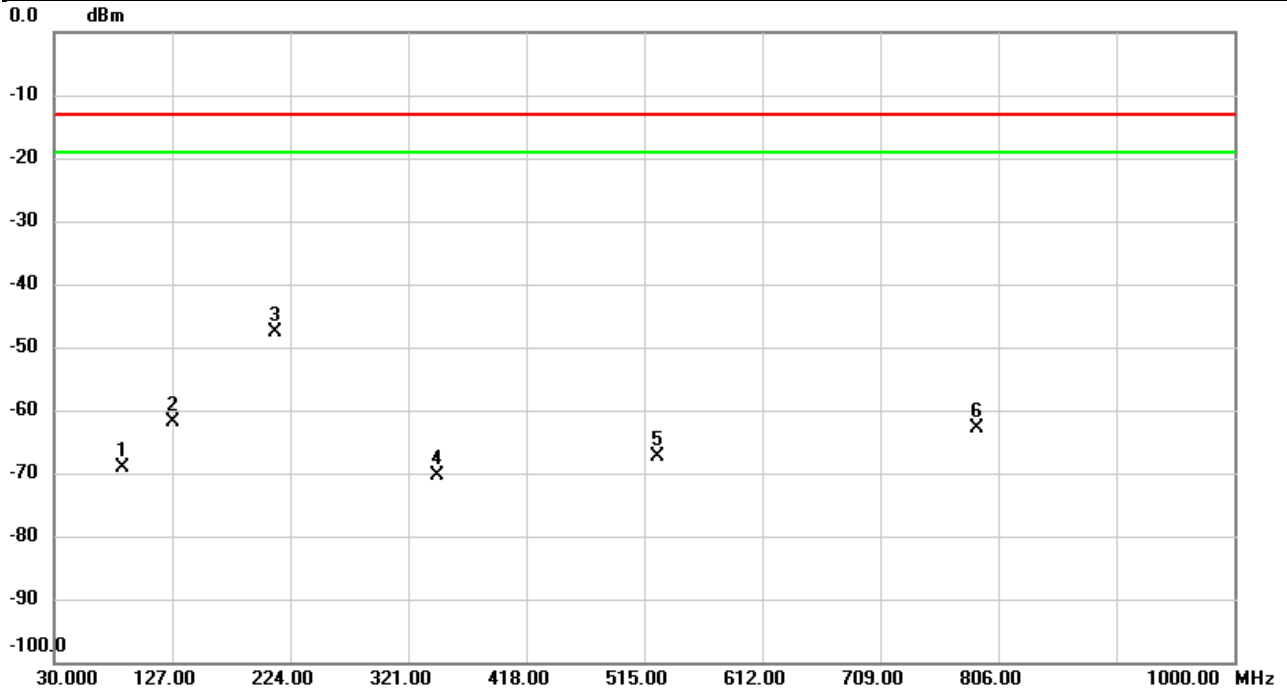


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		86.1953	-65.48	-3.59	-69.07	-13.00	-56.07	peak	
2		127.9700	-58.14	-3.76	-61.90	-13.00	-48.90	peak	
3	*	211.4223	-46.23	-1.32	-47.55	-13.00	-34.55	peak	
4		345.0883	-69.59	-0.79	-70.38	-13.00	-57.38	peak	
5		525.5082	-70.88	3.63	-67.25	-13.00	-54.25	peak	
6		788.2813	-68.77	5.99	-62.78	-13.00	-49.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66C	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

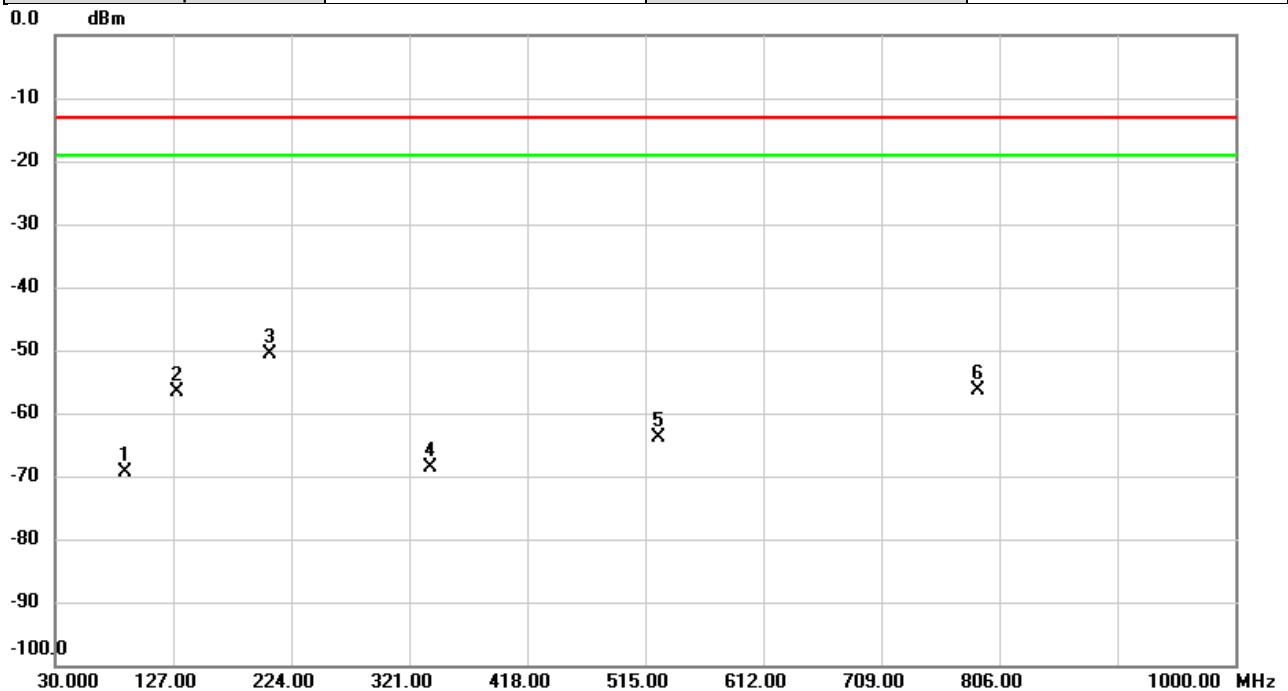


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		88.1676	-63.18	-6.17	-69.35	-13.00	-56.35	peak	
2		130.5890	-52.14	-4.37	-56.51	-13.00	-43.51	peak	
3	*	207.1543	-43.14	-7.38	-50.52	-13.00	-37.52	peak	
4		338.6216	-67.31	-1.23	-68.54	-13.00	-55.54	peak	
5		525.5082	-65.10	1.13	-63.97	-13.00	-50.97	peak	
6		788.2490	-62.37	6.06	-56.31	-13.00	-43.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	LTE Band CA 66C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

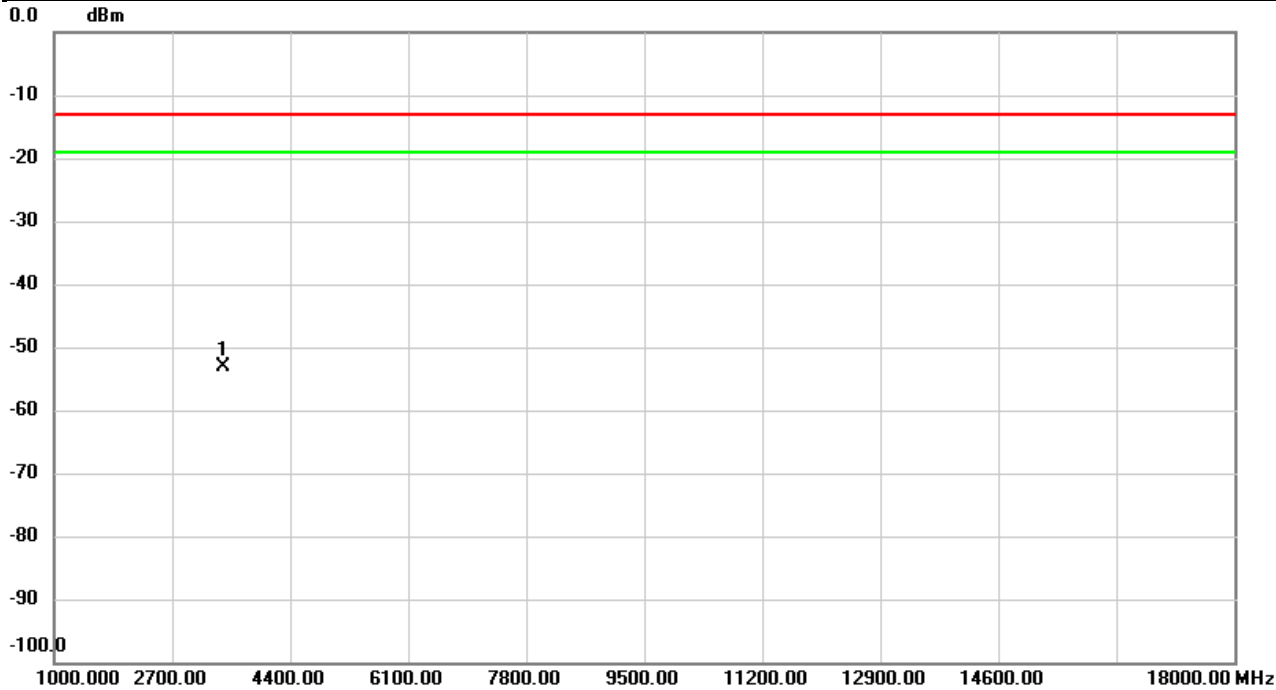

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3440.000	-63.37	10.24	-53.13	-13.00	-40.13	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66C	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

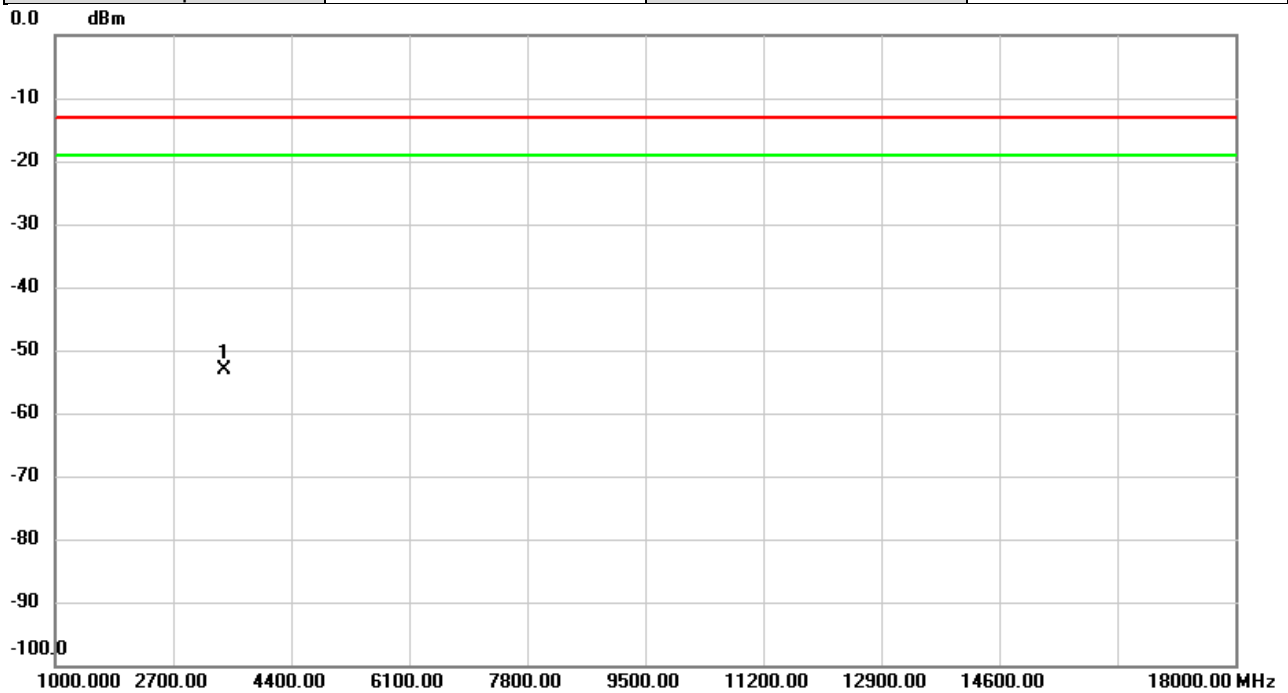


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3440.000	-63.14	9.95	-53.19	-13.00	-40.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

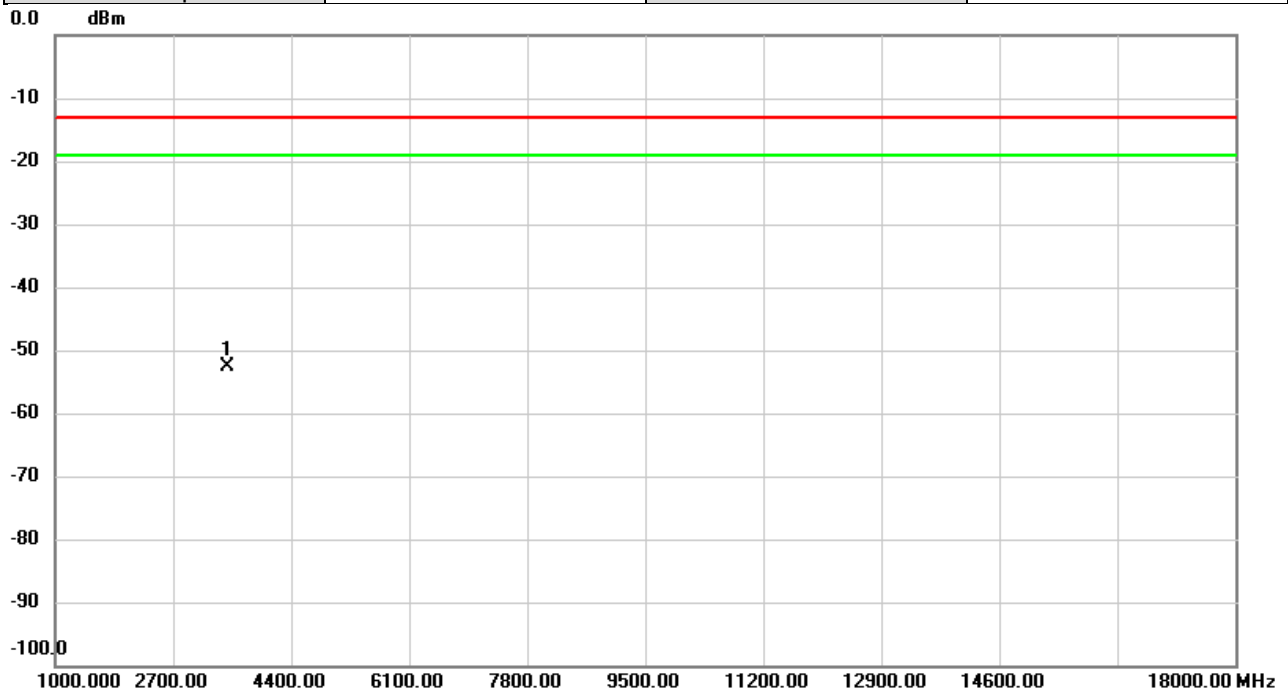


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3490.000	-62.85	10.20	-52.65	-13.00	-39.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_66C	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

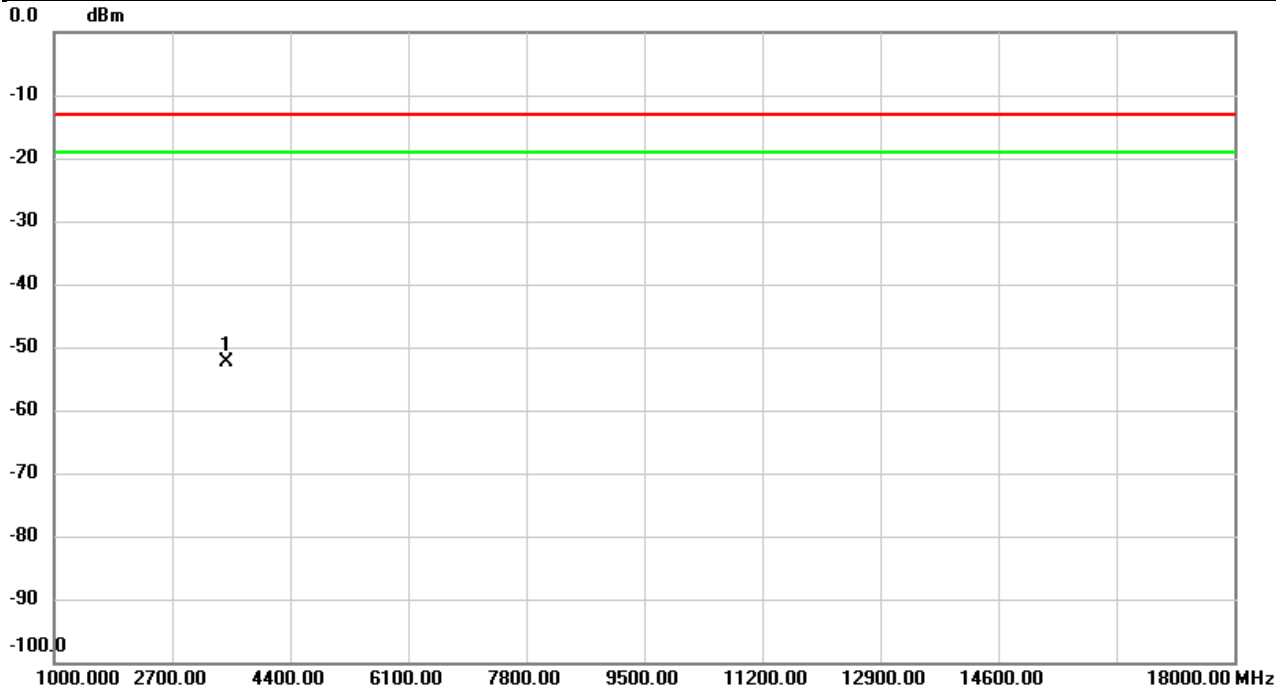


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3490.000	-62.39	9.97	-52.42	-13.00	-39.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

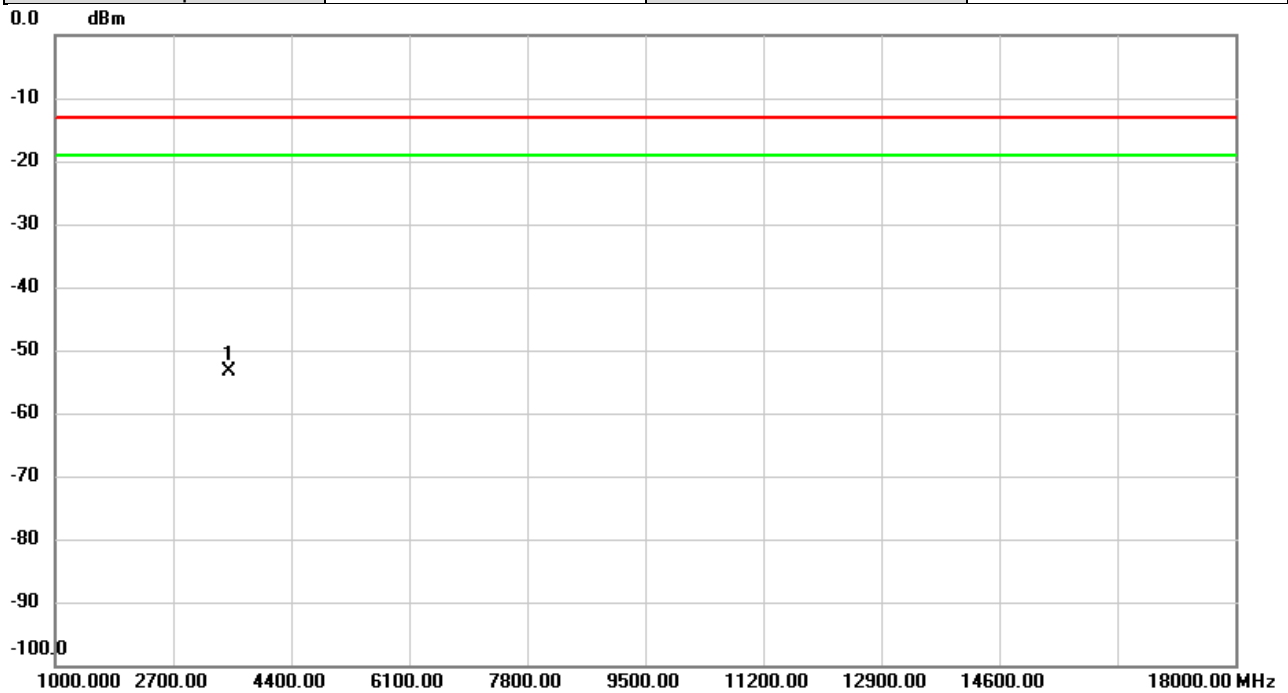


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3500.000	-63.61	10.16	-53.45	-13.00	-40.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 66C	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

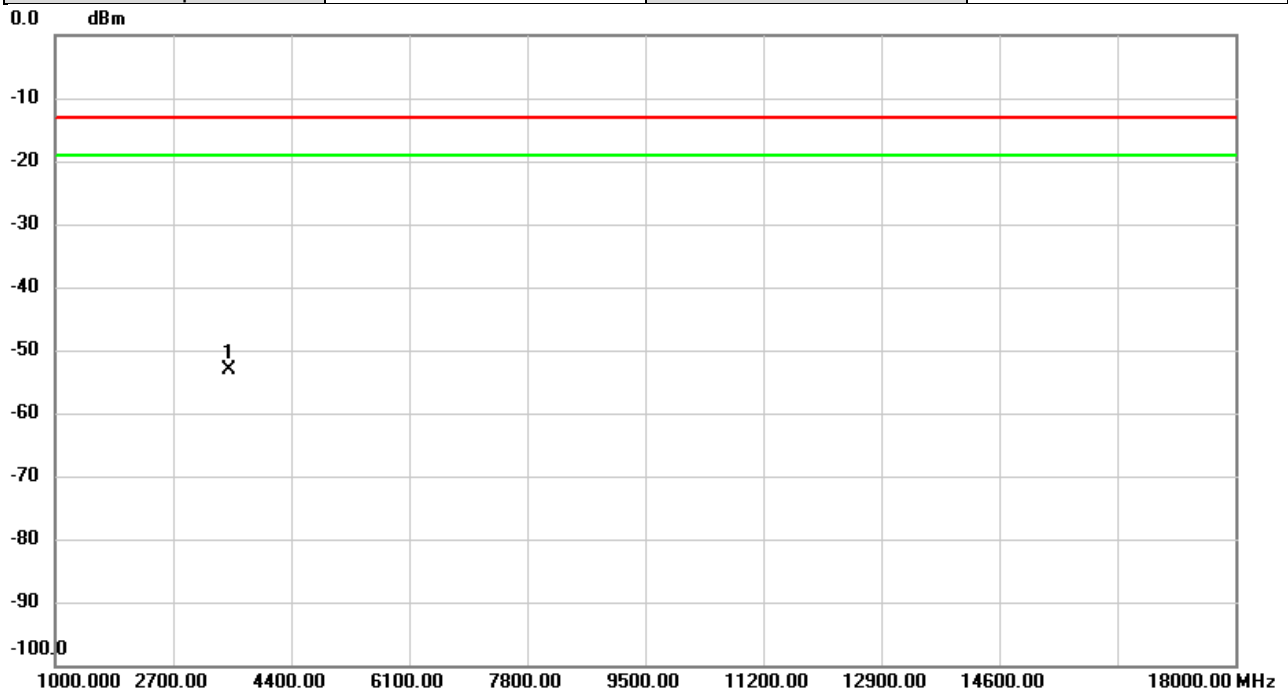

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3500.000	-63.16	9.94	-53.22	-13.00	-40.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report