

FCC Radio Test Report

FCC ID: 2AX2URW350RGLL

Report No. : BTL-FCCP-2-2504T032
Equipment : 5G module
Model Name : RW350R-GL
Brand Name : Rolling Wireless
Applicant : Rolling Wireless S.a r.l.
Address : 8-10, rue Mathias Hardt 1717, Ville-Haute Luxembourg

Radio Function : WCDMA Band II & LTE Band 2, 25

FCC Rule Part(s) : FCC CFR Title 47, Part 24, Subpart E

Date of Receipt : 2025/4/8
Date of Test : 2025/4/28 ~ 2025/6/2
Issued Date : 2025/6/18

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Brett Shen
Brett Shen, Engineer

Approved by : Jerry Chuang
Jerry Chuang, Supervisor



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	REFERENCE TEST GUIDANCE	6
1.2	TEST FACILITY	6
1.3	MEASUREMENT UNCERTAINTY	6
1.4	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	9
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4	SUPPORT UNITS	10
3	EFFECTIVE ISOTROPICAL RADIATED POWER MEASUREMENT	11
3.1	LIMIT	11
3.2	TEST PROCEDURE	11
3.3	DEVIATION FROM TEST STANDARD	11
3.4	TEST SETUP	11
3.5	EUT OPERATING CONDITIONS	11
3.6	TEST RESULT	11
4	RADIATED SPURIOUS EMISSIONS MEASUREMENT	12
4.1	LIMIT	12
4.2	TEST PROCEDURE	12
4.3	DEVIATION FROM TEST STANDARD	12
4.4	TEST SETUP	13
4.5	EUT OPERATING CONDITIONS	13
4.6	TEST RESULT	13
5	LIST OF MEASURING EQUIPMENTS	14
6	EUT TEST PHOTO	15
7	EUT PHOTOS	15
APPENDIX A	EFFECTIVE ISOTROPIC RADIATED POWER	16
APPENDIX B	RADIATED SPURIOUS EMISSIONS	20

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2504T032	R00	Original Report.	2025/6/18	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
2.1046 24.232(c)	Effective Isotropic Radiated Power	APPENDIX A	Pass	-----
2.1053 24.238(a)	Radiated Spurious Emissions	APPENDIX B	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCC ID: 2AX2URW350RGLL) to be incorporated to the host device (Model number: TP00167A), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 REFERENCE TEST GUIDANCE

ANSI C63.26-2015
ANSI/TIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.2 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☒ SR10 ☐ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.4 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
Effective Isotropic Radiated Power	23 °C, 58 %	AC 120V	Easton Tsai
Radiated Spurious Emissions	Refer to data	AC 120V	Mark Wang

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	5G module			
Model Name	RW350R-GL			
Brand Name	Rolling Wireless			
Model Difference	N/A			
Power Source	Supplied from host system.			
Power Rating	3.3 Vdc			
Host device information				
Equipment	Notebook Computer			
Model Name	TP00167A			
Brand Name	Lenovo			
Model Difference	N/A			
Power Source	DC voltage supplied from External Power Supply. (Lenovo / ADL180YGSLC3A, ADL180YGSAC3A, ADL180YGSHC3A)			
Power Rating	Model: ADL180YGSLC3A Input: 100-240V~ 3.0A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W			
	Model: ADL180YGSAC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W			
	Model: ADL180YGSHC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 5.0VDC 3.0A 15.0W / 9.0VDC 3.0A 27.0W / 15.0VDC 3.0A 45.0W / 20.0VDC 5.0A 100.0W / 28.0VDC 5.0A 140.0W			
WIFI+BT Module	Intel® BE200NGW / BE200NGW			
WWAN Module	Rolling Wireless / RW350R-GL			
NFC Module	FOXCONN / T77H747			
Operation Frequency	Band	UL Frequency (MHz)	DL Frequency (MHz)	
	WCDMA II	1850 ~ 1910	1930 ~ 1990	
	LTE 2	1850 ~ 1910	1930 ~ 1990	
	LTE 25	1850 ~ 1915	1930 ~ 1995	
Maximum EIRP	Band	BW (MHz)	Mode	Power (W)
	WCDMA II	-	-	0.372
	LTE 25/2	1.4	QPSK	0.302
			16QAM	0.189
		3	QPSK	0.305
			16QAM	0.189
		5	QPSK	0.311
			16QAM	0.192
		10	QPSK	0.312
			16QAM	0.196
		15	QPSK	0.313
			16QAM	0.199
		20	QPSK	0.319
			16QAM	0.203
64QAM	0.165			
256QAM	0.128			
Test Model	RW350R-GL			
Sample Status	Engineering Sample			
EUT Modification(s)	N/A			

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	Speedwire	DC330027Q10	PIFA	I-PEX	1.57	WCDMA Band II
					1.57	LTE Band 2
Aux	Speedwire	DC330027Q10	PIFA	I-PEX	-	LTE Band 25
MIMO1	Speedwire	DC330027Q10	PIFA	I-PEX	-	RX only
MIMO2	Speedwire	DC330027Q10	PIFA	I-PEX	0.96	WCDMA Band II
					0.94	LTE Band 2
						LTE Band 25

(3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES


Test Items	Band	Test Mode	Note
Effective Isotropic Radiated Power	WCDMA Band II	Refer to APPENDIX A	-
	LTE Band 2/25		
Radiated Spurious Emissions (Below 1G)	WCDMA Band II	Refer to APPENDIX B	-
	LTE Band 2		
	LTE Band 25		
	LTE Band CA_2A-5A		
	LTE Band CA_2A-12A		
	LTE Band CA_2A-13A		
	LTE Band CA_2A-14A		
	LTE Band CA_2A-48A		
	LTE Band CA_25A-26A		
Radiated Spurious Emissions (Above 1G)	WCDMA Band II	Refer to APPENDIX B	-
	LTE Band 2		
	LTE Band 25		
	LTE Band CA_2A-5A		
	LTE Band CA_2A-12A		
	LTE Band CA_2A-13A		
	LTE Band CA_2A-14A		
	LTE Band CA_2A-48A		
	LTE Band CA_25A-26A		
Radiated Spurious Emissions (Above 18G)	WCDMA Band II	Refer to APPENDIX B	-
	LTE Band 2		
	LTE Band 25		
	LTE Band CA_2C		

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (2) For Radiated Spurious Emissions both QPSK, 16QAM, 64QAM and 256QAM are evaluated, but only the worst case (QPSK) is recorded.
- (3) LTE Band 25 (1850 ~ 1915 MHz) overlaps the entire frequency range of LTE Band 2 (1850 ~ 1910 MHz). Therefore, test data provided in this report covers Band 2 as well as Band 25.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

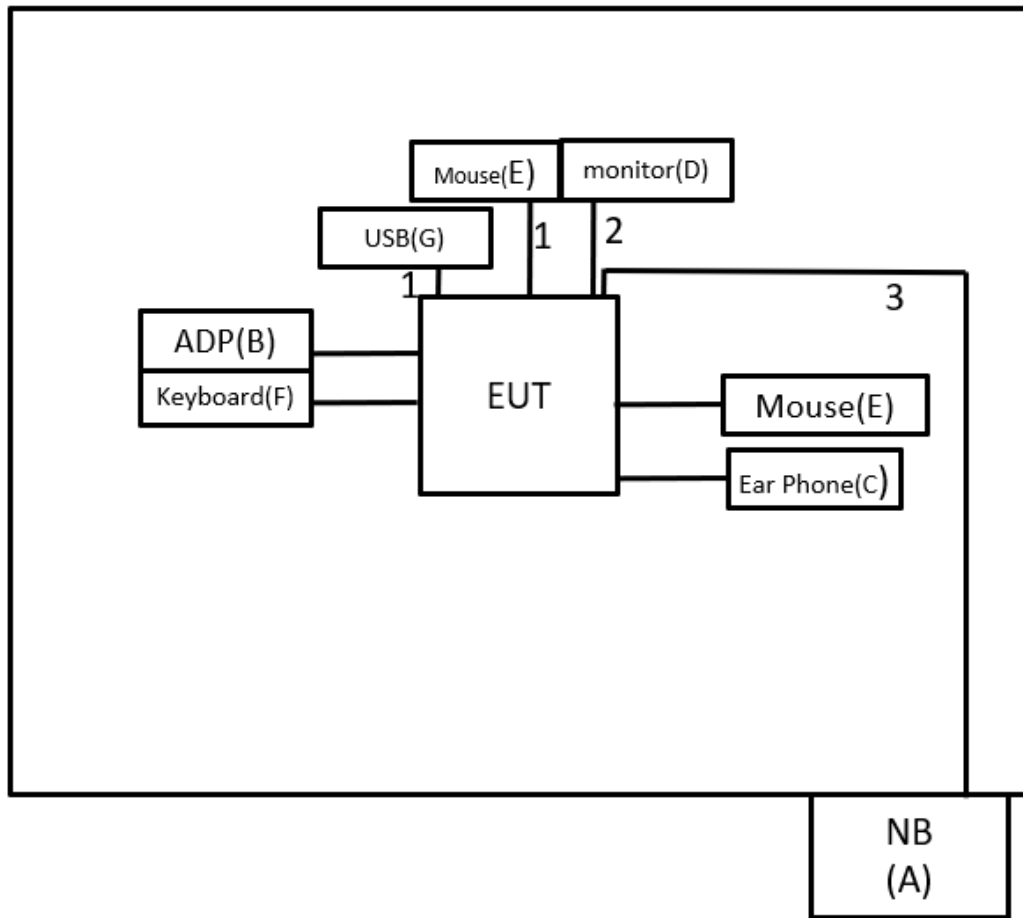

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	HP	TPN-I119	N/A	Furnished by test lab.
B	ADP	Lenovo	ADL180YGSHC 3A	N/A	Supplied by test requester.
C	Ear Phone	HTC	S260	N/A	Furnished by test lab.
D	27" 4K Monitor	DELL	P2415Q	N/A	Furnished by test lab.
E	Mouse	Lenovo	SM-8823	N/A	Furnished by test lab.
F	Keyboard	Bloody	KB-8	N/A	Furnished by test lab.
G	USB	ADATA	UV150	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.1m	USB-C to USB 3.0 CABLE	Furnished by test lab.
2	N/A	N/A	1.8m	HDMI	Furnished by test lab.
3	N/A	N/A	10m	RJ45 Cable	Furnished by test lab.

3 EFFECTIVE ISOTROPICAL RADIATED POWER MEASUREMENT

3.1 LIMIT

Mobile / Portable station are limited to 2 watts e.i.r.p.

3.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi.}$
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

Conducted Measurement:



3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBm)		Correct Factor (dB/m)		Measurement Value (dBm)
-50.43	+	-2.11	=	-52.54

Measurement Value (dBm)		Limit Value (dBm)		Margin Level (dB)
-52.54	-	-13	=	-39.54

4.2 TEST PROCEDURE


The testing follows FCC KDB 971168 v03r01 Section 6.2.

- In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- EIRP = Output power level of S.G - TX cable loss + Antenna gain of substitution horn.
- ERP power can be calculated form EIRP power by subtracting the gain of dipole,
ERP power = EIRP power - 2.15 dBi.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz / 3 MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

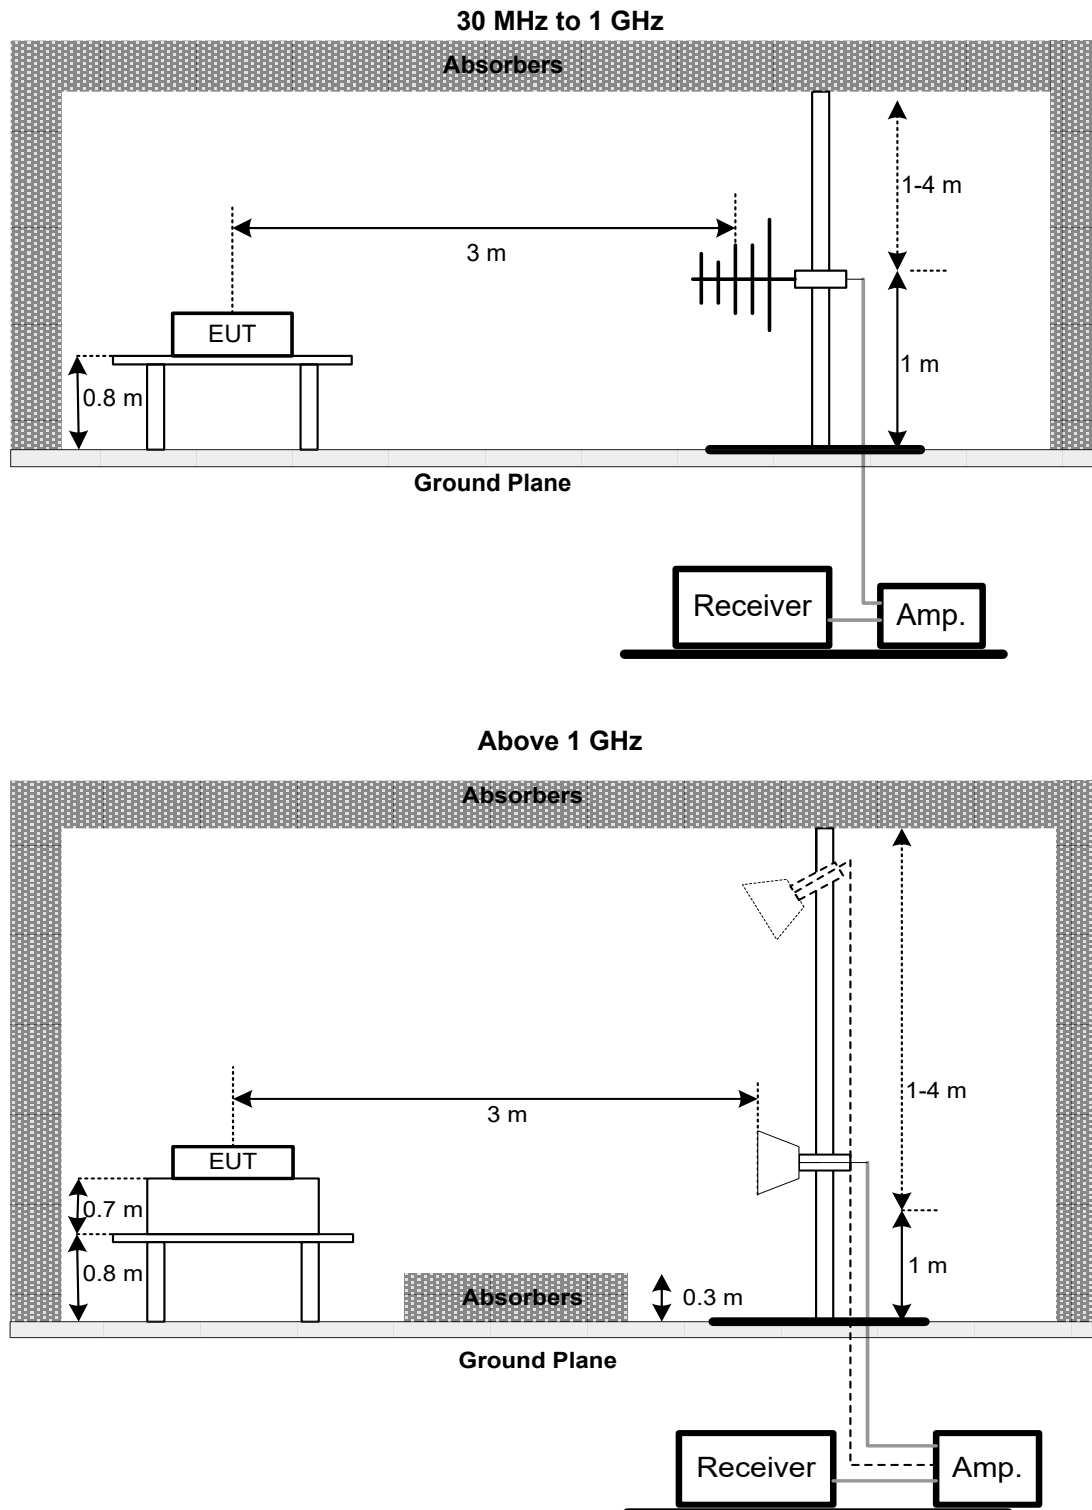

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B.

5 LIST OF MEASURING EQUIPMENTS

Effective Isotropic Radiated Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2024/7/7	2025/7/6
2	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18
3	Radio Communication Analyzer	ANRITSU	MT8000A	6262036844	2024/11/20	2025/11/19

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2024/9/5	2025/9/4
2	Preamplifier	EMCI	EMC118A45SE	980819	2025/3/5	2026/3/4
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2024/9/4	2025/9/3
4	Preamplifier	EMCI	EMC001340	980579	2024/9/4	2025/9/3
5	Test Cable	EMCI	EMC104-SM-1000	180809	2025/3/5	2026/3/4
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2025/3/5	2026/3/4
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2025/2/19	2026/2/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2024/9/9	2025/9/8
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
					2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2024/5/17	2025/5/16
					2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2024/6/14	2025/6/13
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2024/6/14	2025/6/13
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2025/3/12	2026/3/11
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
16	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A
17	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2504T032-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2504T032-1 (APPENDIX-EUT PHOTOS).

APPENDIX A EFFECTIVE ISOTROPIC RADIATED POWER

WCDMA Band II Power:

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
WCDMA Band II	Rel 99	9262/9662	1852.4	23.79	25.36	0.344
		9400/9800	1880.0	24.14	25.71	0.372
		9538/9938	1907.6	24.12	25.69	0.371

Band	Sub-test	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
HSDPA II	1	9262/9662	1852.4	23.05	24.62	0.290
		9400/9800	1880.0	23.15	24.72	0.296
		9538/9938	1907.6	23.09	24.66	0.292
	2	9262/9662	1852.4	22.89	24.46	0.279
		9400/9800	1880.0	22.77	24.34	0.272
		9538/9938	1907.6	22.90	24.47	0.280
	3	9262/9662	1852.4	22.42	23.99	0.251
		9400/9800	1880.0	22.32	23.89	0.245
		9538/9938	1907.6	22.49	24.06	0.255
	4	9262/9662	1852.4	22.35	23.92	0.247
		9400/9800	1880.0	22.29	23.86	0.243
		9538/9938	1907.6	22.48	24.05	0.254

Band	Sub-test	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	EIRP power (dBm)	EIRP power (W)
HSUPA II	1	9262/9662	1852.4	21.03	22.6	0.182
		9400/9800	1880.0	21.08	22.65	0.184
		9538/9938	1907.6	21.05	22.62	0.183
	2	9262/9662	1852.4	19.44	21.01	0.126
		9400/9800	1880.0	19.37	20.94	0.124
		9538/9938	1907.6	19.35	20.92	0.124
	3	9262/9662	1852.4	20.41	21.98	0.158
		9400/9800	1880.0	20.33	21.9	0.155
		9538/9938	1907.6	20.39	21.96	0.157
	4	9262/9662	1852.4	19.39	20.96	0.125
		9400/9800	1880.0	21.34	22.91	0.195
		9538/9938	1907.6	21.33	22.9	0.195
	5	9262/9662	1852.4	21.48	23.05	0.202
		9400/9800	1880.0	21.36	22.93	0.196
		9538/9938	1907.6	21.42	22.99	0.199

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

LTE Band 25/2 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	1.4	26047	1850.7	QPSK	1	0	0	23.08	24.65	0.292
				16QAM	1	0	2	21.10	22.67	0.185
		26340	1880	QPSK	1	0	0	23.22	24.79	0.302
				16QAM	1	0	2	21.19	22.76	0.189
		26683	1914.3	QPSK	1	0	0	22.99	24.56	0.286
				16QAM	1	0	2	21.02	22.59	0.181
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	3	26055	1851.5	QPSK	1	0	0	23.13	24.70	0.295
				16QAM	1	0	2	21.19	22.76	0.189
		26340	1880	QPSK	1	0	0	23.27	24.84	0.305
				16QAM	1	0	2	21.20	22.77	0.189
		26675	1913.5	QPSK	1	0	0	23.02	24.59	0.288
				16QAM	1	0	2	21.08	22.65	0.184
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	5	26065	1852.5	QPSK	1	0	0	23.19	24.76	0.299
				16QAM	1	0	2	21.23	22.80	0.191
		26340	1880	QPSK	1	0	0	23.35	24.92	0.311
				16QAM	1	0	2	21.26	22.83	0.192
		26665	1912.5	QPSK	1	0	0	23.08	24.65	0.292
				16QAM	1	0	2	21.15	22.72	0.187
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	10	26090	1855	QPSK	1	0	0	23.28	24.85	0.305
				16QAM	1	0	2	21.30	22.87	0.194
		26340	1880	QPSK	1	0	0	23.37	24.94	0.312
				16QAM	1	0	2	21.35	22.92	0.196
		26640	1910	QPSK	1	0	0	23.10	24.67	0.293
				16QAM	1	0	2	21.18	22.75	0.189
Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	15	26115	1857.5	QPSK	1	0	0	23.36	24.93	0.311
				16QAM	1	0	2	21.32	22.89	0.194
		26340	1880	QPSK	1	0	0	23.38	24.95	0.313
				16QAM	1	0	2	21.42	22.99	0.199
		26615	1907.5	QPSK	1	0	0	23.15	24.72	0.296
				16QAM	1	0	2	21.23	22.80	0.190

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)	EIRP power (dBm)	EIRP power (W)
25 / 2	20	26140	1860	QPSK	1	0	0	23.45	25.02	0.318
					1	49	0	23.33	24.90	0.309
					1	99	0	23.18	24.75	0.299
					50	0	1	22.43	24.00	0.251
					50	24	1	22.42	23.99	0.250
					50	50	1	22.29	23.86	0.243
					100	0	1	22.48	24.05	0.254
				16QAM	1	0	2	21.39	22.96	0.198
				64QAM	1	0	3	20.44	22.01	0.159
				256QAM	1	0	4	19.42	20.99	0.126
		26340	1880	QPSK	1	0	0	23.47	25.04	0.319
					1	49	0	23.42	24.99	0.316
					1	99	0	23.30	24.87	0.307
					50	0	1	22.48	24.05	0.254
					50	24	1	22.46	24.03	0.253
					50	50	1	22.44	24.01	0.252
					100	0	1	22.39	23.96	0.249
				16QAM	1	0	2	21.43	23.00	0.200
				64QAM	1	0	3	20.45	22.02	0.159
				256QAM	1	0	4	19.41	20.98	0.125
		26590	1905	QPSK	1	0	0	23.42	24.99	0.316
					1	49	0	23.33	24.90	0.309
					1	99	0	23.26	24.83	0.304
					50	0	1	22.43	24.00	0.251
					50	24	1	22.39	23.96	0.249
					50	50	1	22.35	23.92	0.246
					100	0	1	22.43	24.00	0.251
				16QAM	1	0	2	21.50	23.07	0.203
				64QAM	1	0	3	20.60	22.17	0.165
				256QAM	1	0	4	19.52	21.09	0.128

NOTE:


(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

APPENDIX B RADIATED SPURIOUS EMISSIONS

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Vertical
Temp	26°C	Hum.	52%

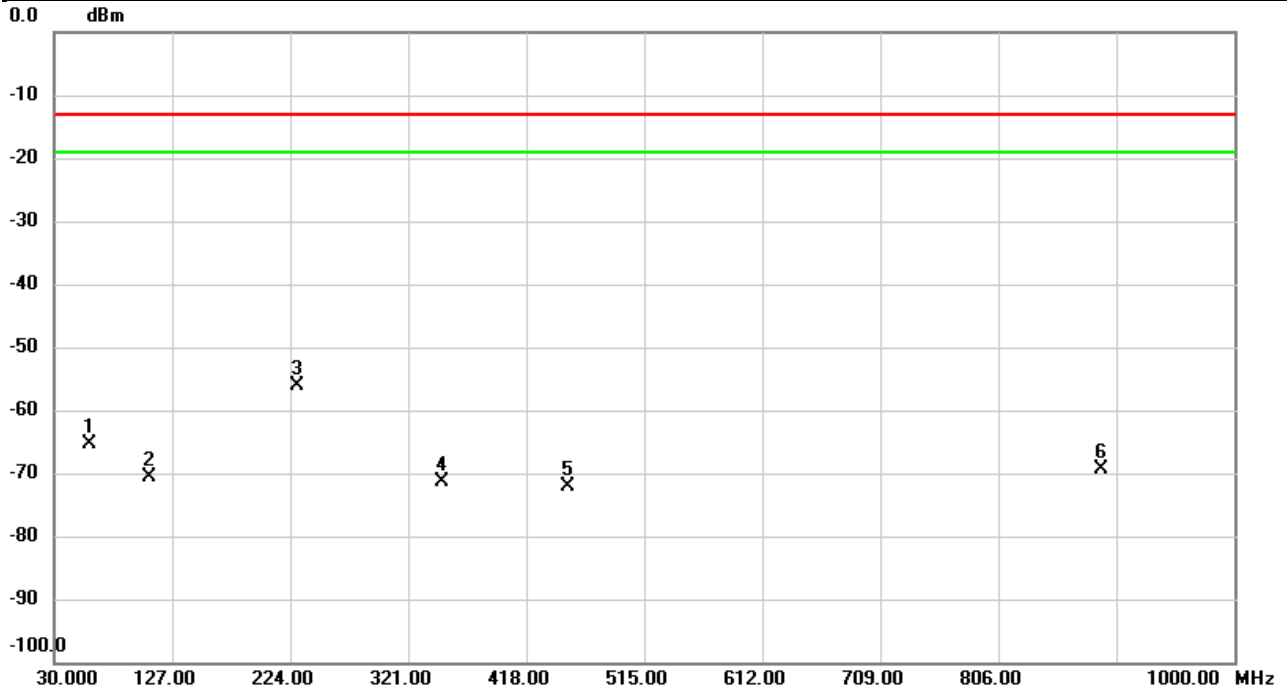


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		59.5527	-57.55	-7.70	-65.25	-13.00	-52.25	peak	
2		108.5053	-64.84	-5.77	-70.61	-13.00	-57.61	peak	
3	*	229.9493	-53.28	-2.81	-56.09	-13.00	-43.09	peak	
4		348.1923	-68.49	-2.91	-71.40	-13.00	-58.40	peak	
5		452.0793	-70.84	-1.23	-72.07	-13.00	-59.07	peak	
6		890.4223	-75.70	6.37	-69.33	-13.00	-56.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Horizontal
Temp	26°C	Hum.	52%

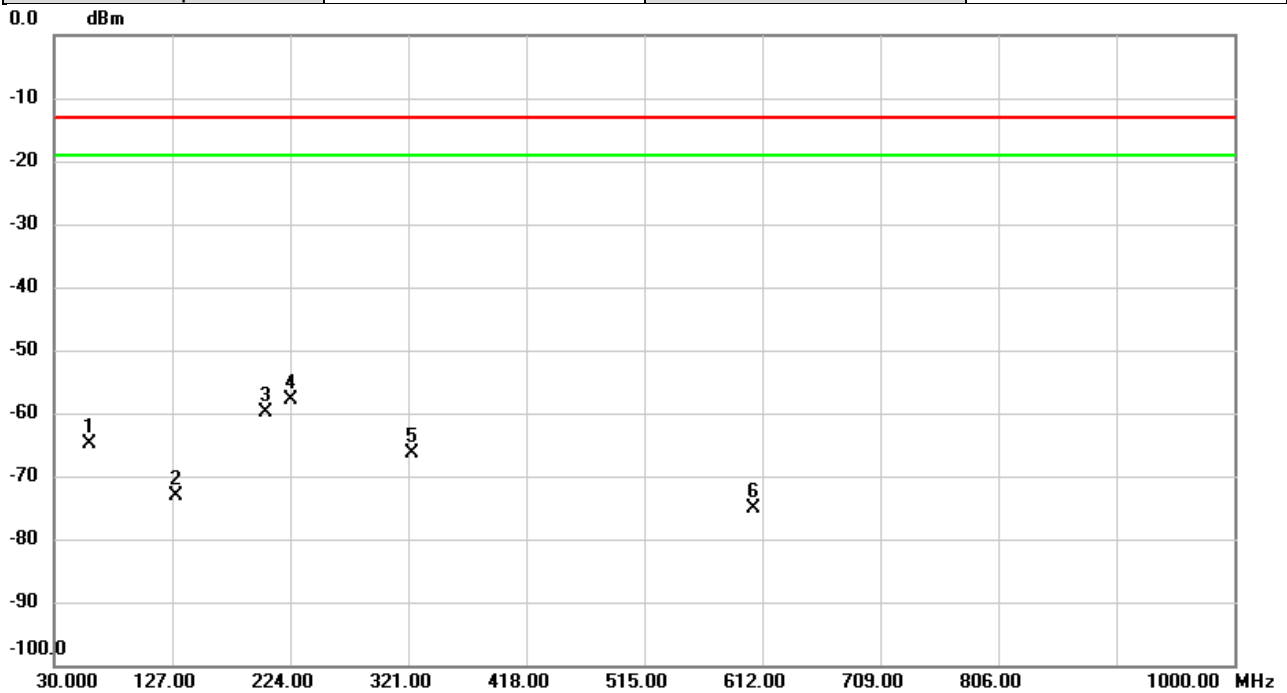


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.6497	-60.84	-3.97	-64.81	-13.00	-51.81	peak	
2		130.1040	-66.49	-6.56	-73.05	-13.00	-60.05	peak	
3		203.9210	-50.42	-9.57	-59.99	-13.00	-46.99	peak	
4	*	224.1940	-49.28	-8.65	-57.93	-13.00	-44.93	peak	
5		324.5242	-62.01	-4.41	-66.42	-13.00	-53.42	peak	
6		605.4687	-75.48	0.27	-75.21	-13.00	-62.21	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9262	Polarization	Vertical
Temp	26°C	Hum.	52%

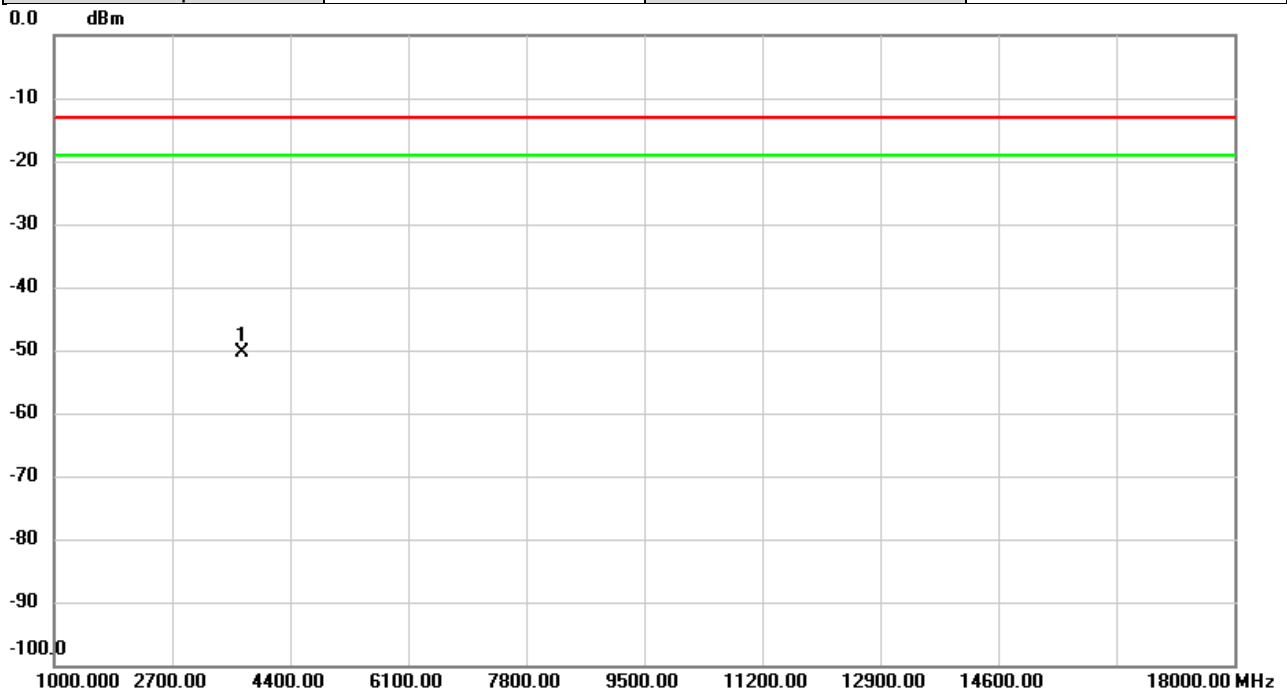


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3704.800	-62.09	11.71	-50.38	-13.00	-37.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9262	Polarization	Horizontal
Temp	26°C	Hum.	52%

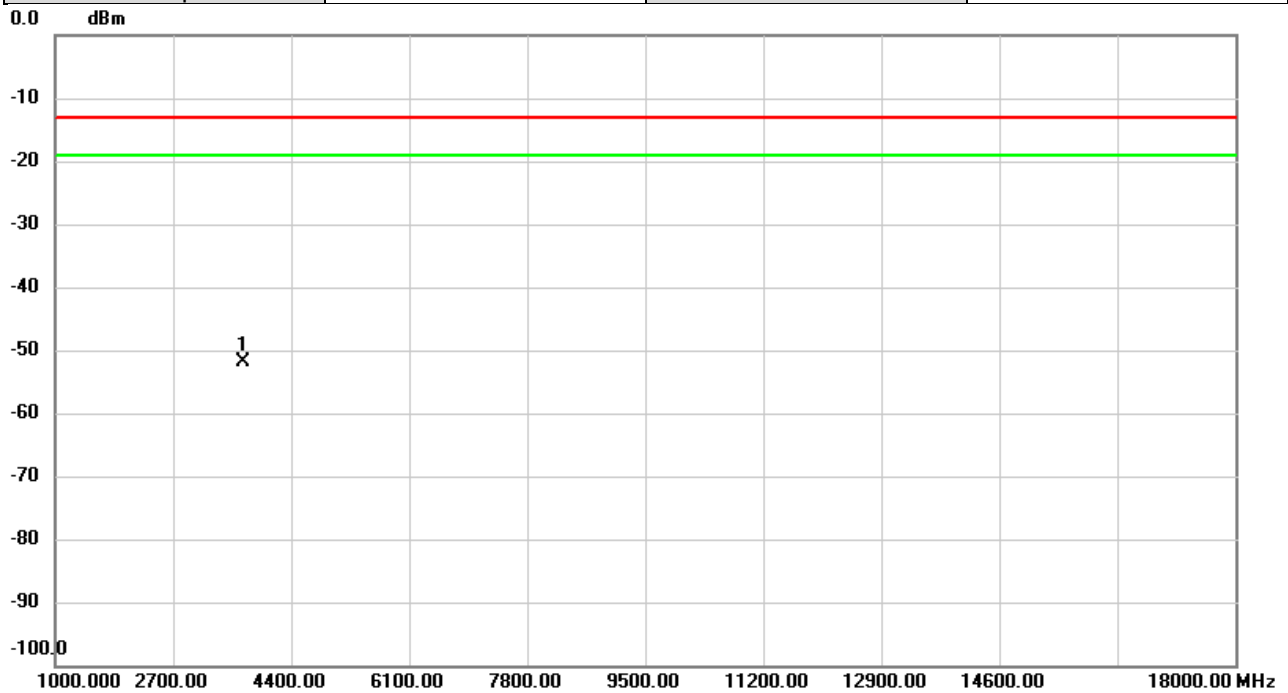


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3704.800	-62.88	11.13	-51.75	-13.00	-38.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9400	Polarization	Vertical
Temp	26°C	Hum.	52%

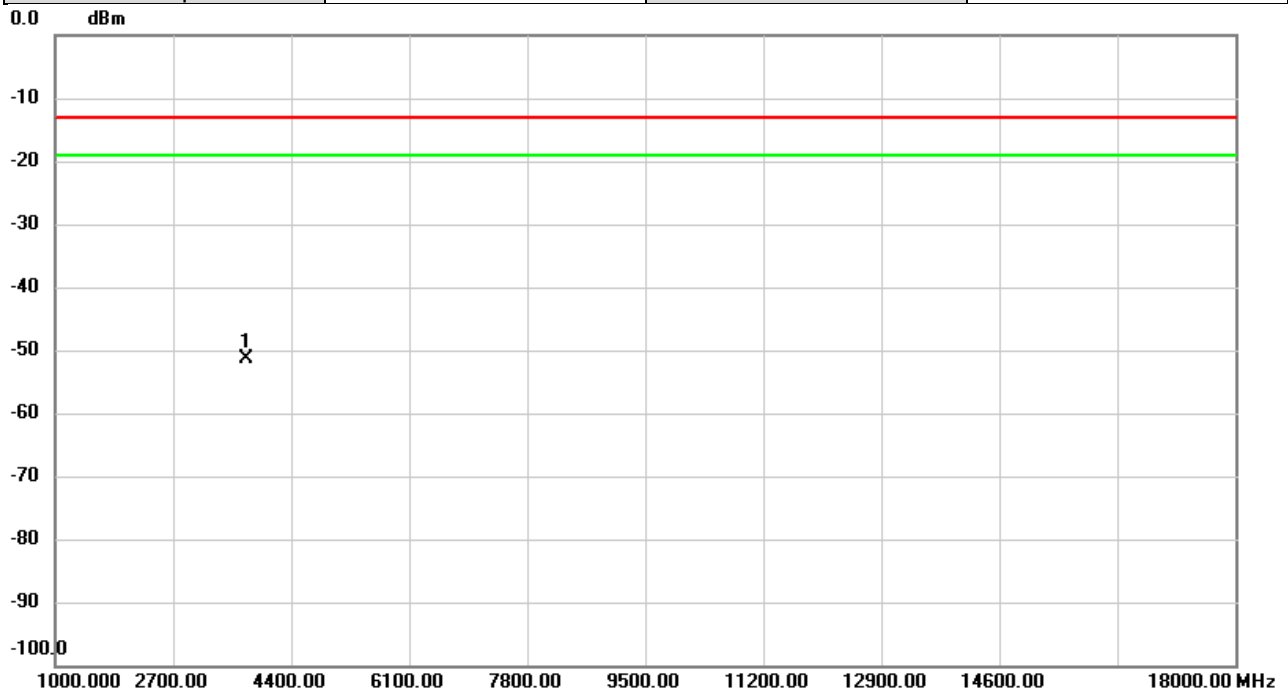


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-62.99	11.56	-51.43	-13.00	-38.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9400	Polarization	Horizontal
Temp	26°C	Hum.	52%

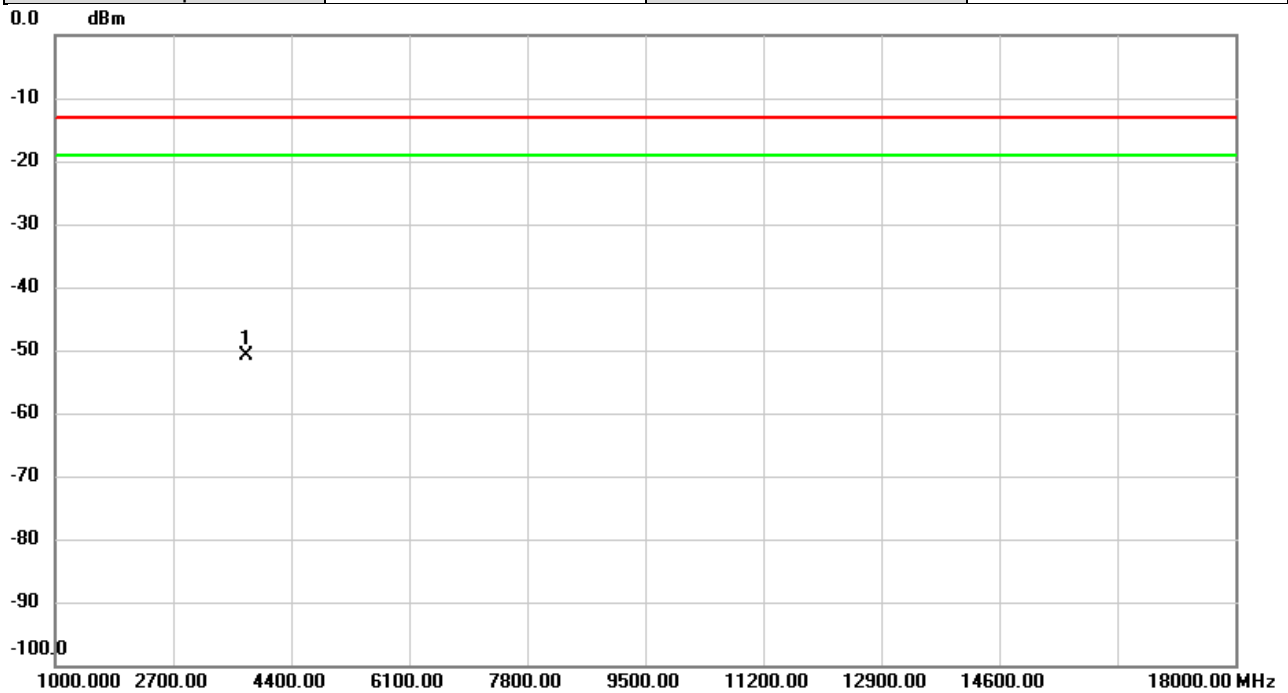


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-62.03	11.22	-50.81	-13.00	-37.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Vertical
Temp	26°C	Hum.	52%

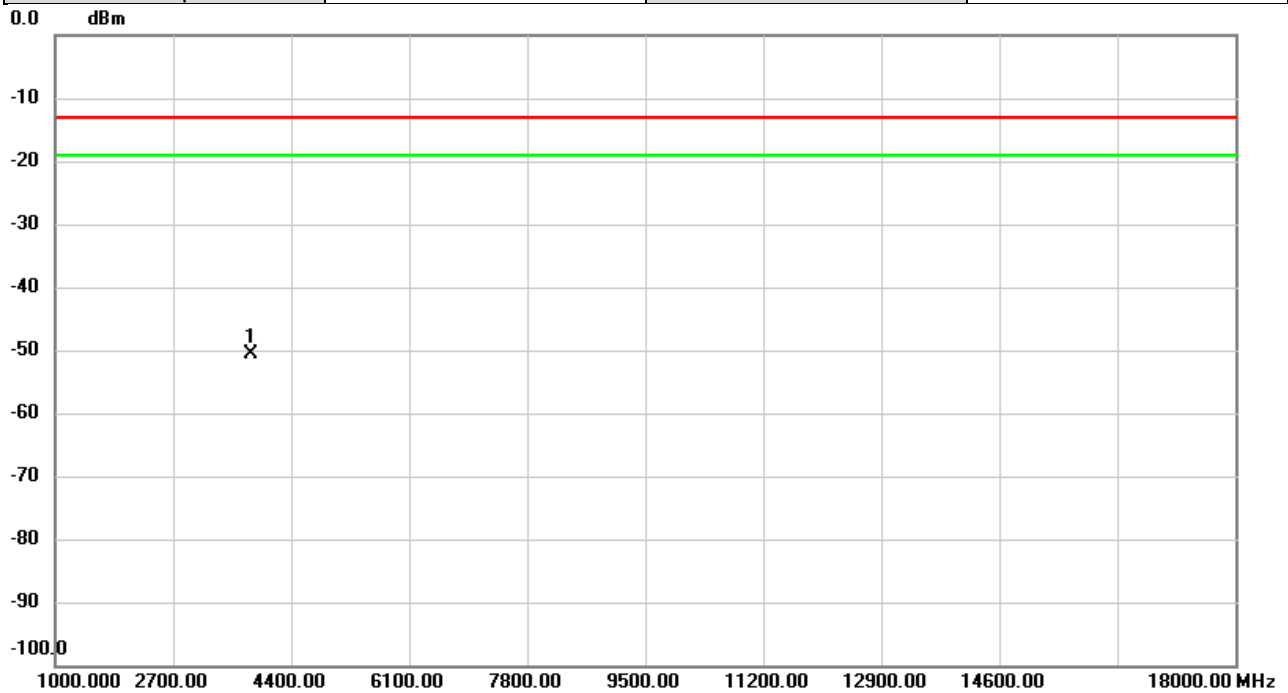


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3814.000	-62.36	11.78	-50.58	-13.00	-37.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Horizontal
Temp	26°C	Hum.	52%

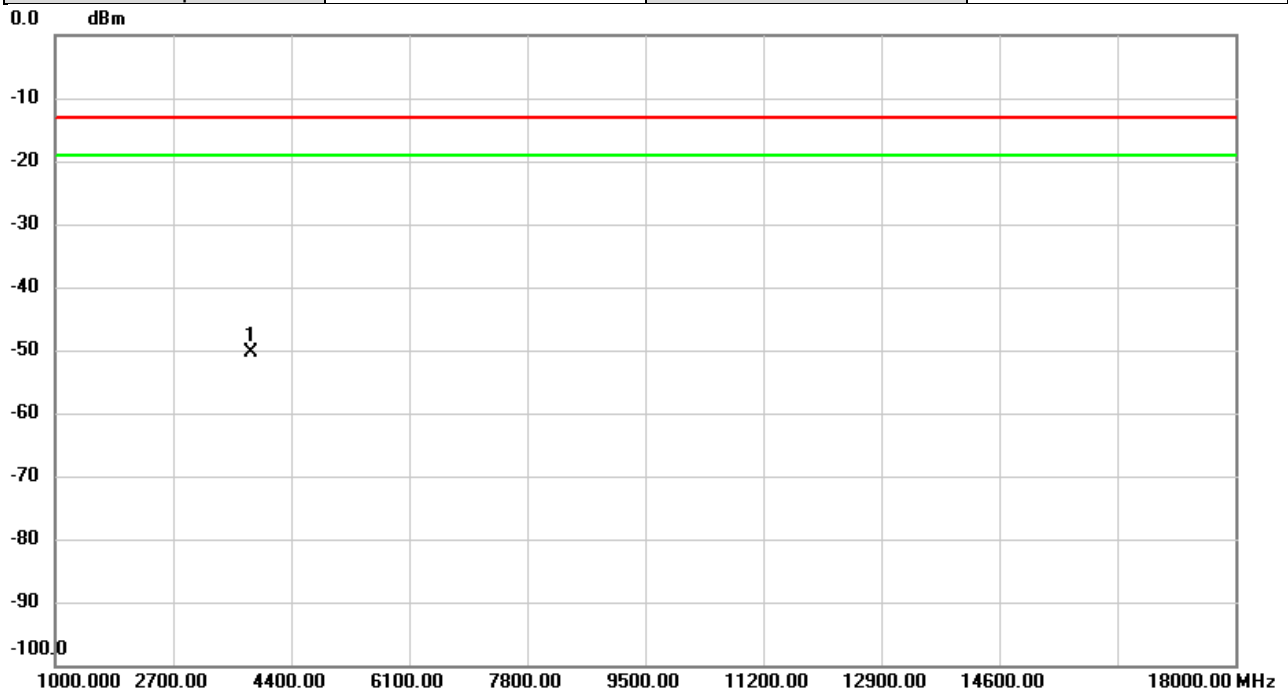


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3814.000	-61.94	11.62	-50.32	-13.00	-37.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Vertical
Temp	26°C	Hum.	52%

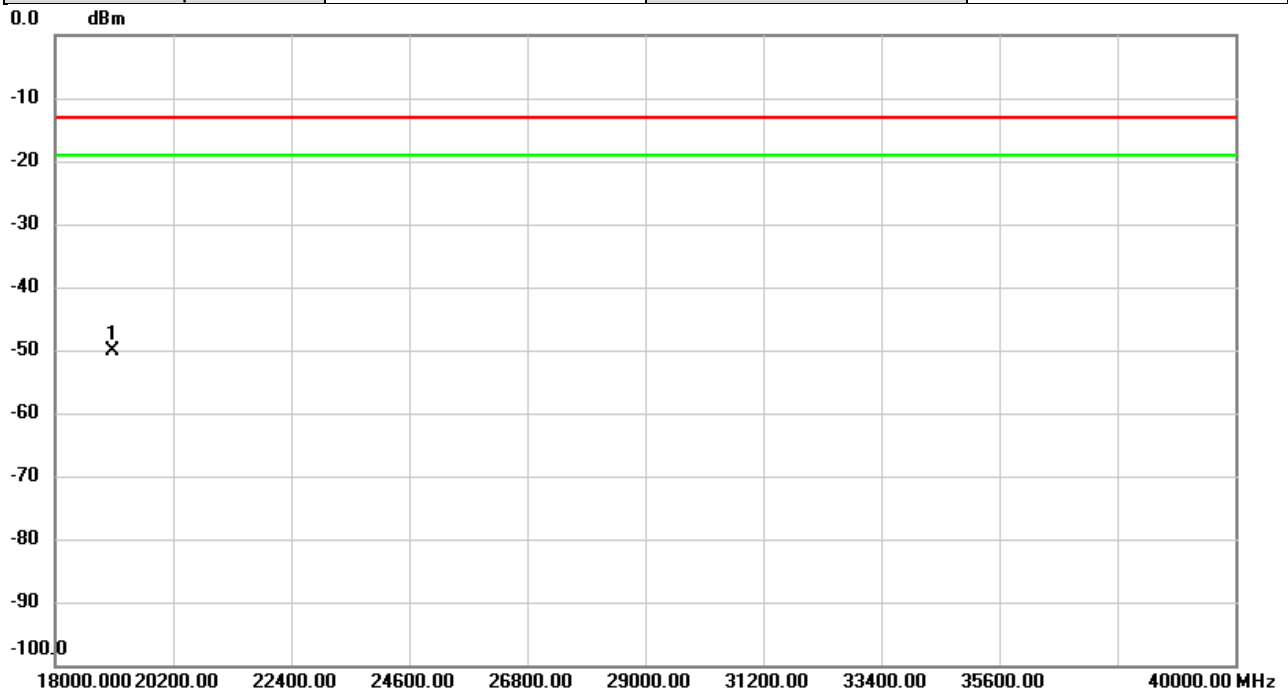


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19070.00	-52.42	2.34	-50.08	-13.00	-37.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/5/5
Test Channel	CH9538	Polarization	Horizontal
Temp	26°C	Hum.	52%

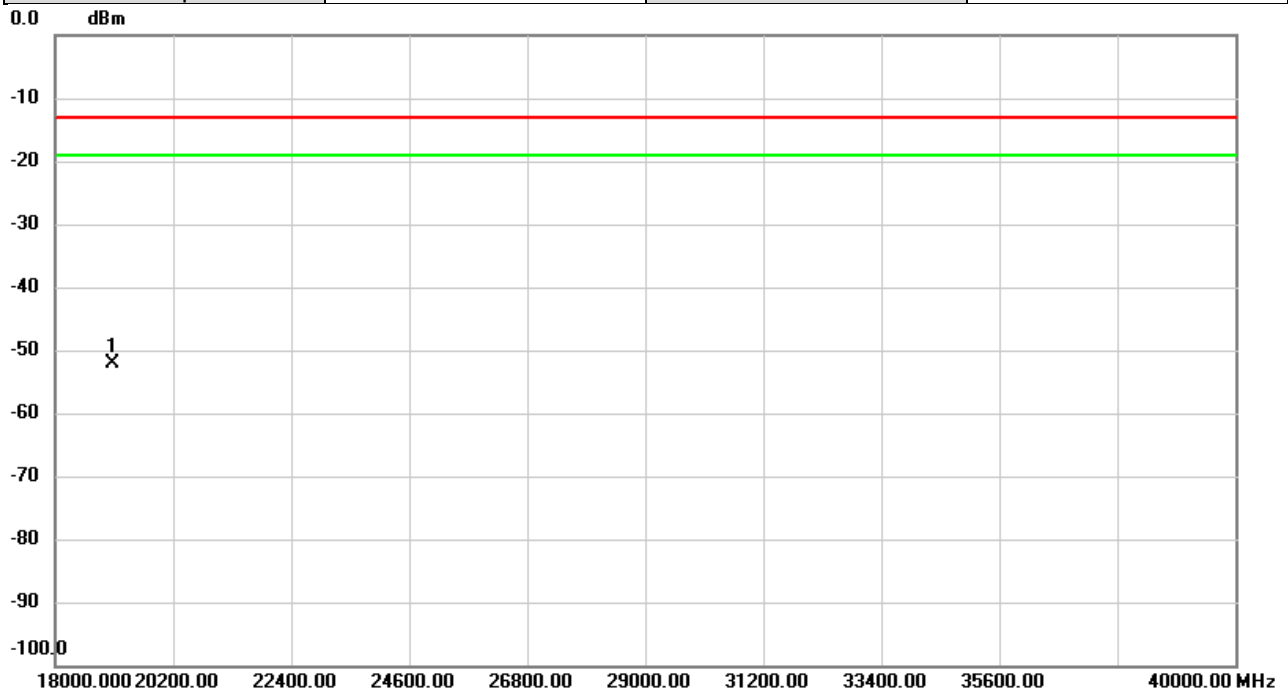


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19070.00	-53.40	1.30	-52.10	-13.00	-39.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/5/2
Test Channel	CH19100	Polarization	Vertical
Temp	27°C	Hum.	61%

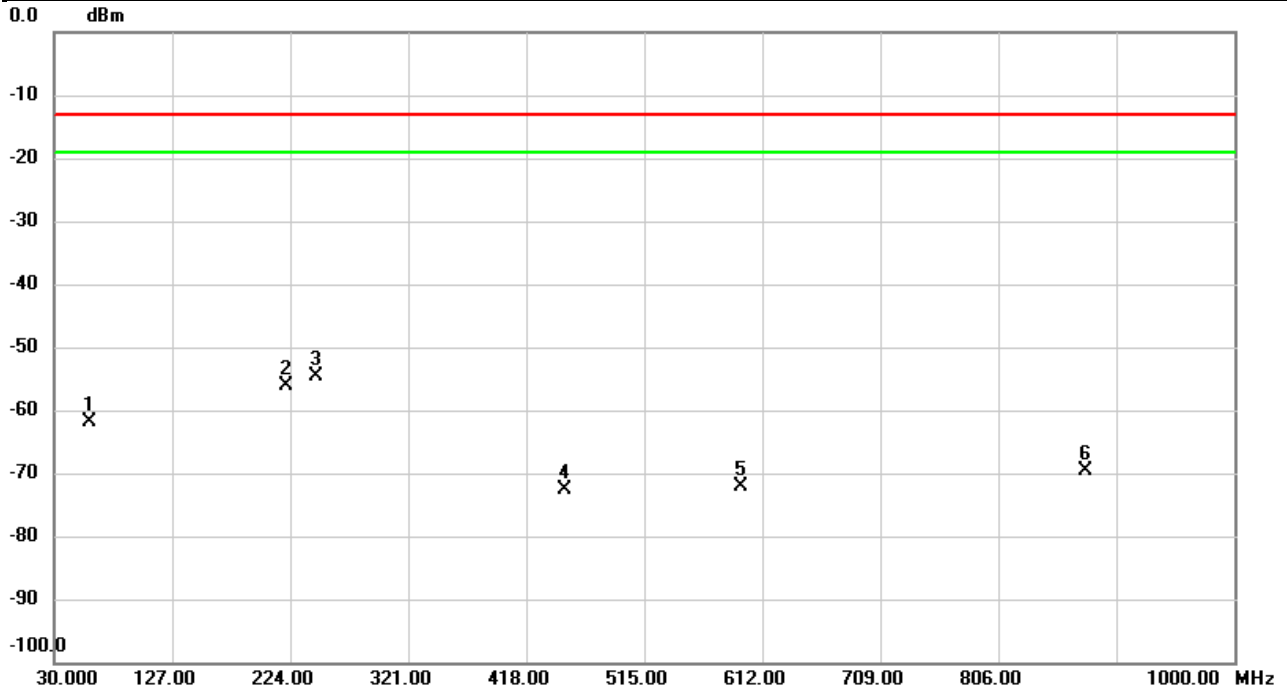


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.4880	-54.06	-7.69	-61.75	-13.00	-48.75	peak	
2		221.2517	-52.29	-3.74	-56.03	-13.00	-43.03	peak	
3	*	245.3400	-52.03	-2.68	-54.71	-13.00	-41.71	peak	
4		449.1047	-71.22	-1.31	-72.53	-13.00	-59.53	peak	
5		595.1543	-75.24	3.23	-72.01	-13.00	-59.01	peak	
6		877.3597	-75.68	5.95	-69.73	-13.00	-56.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/5/2
Test Channel	CH19100	Polarization	Horizontal
Temp	27°C	Hum.	61%

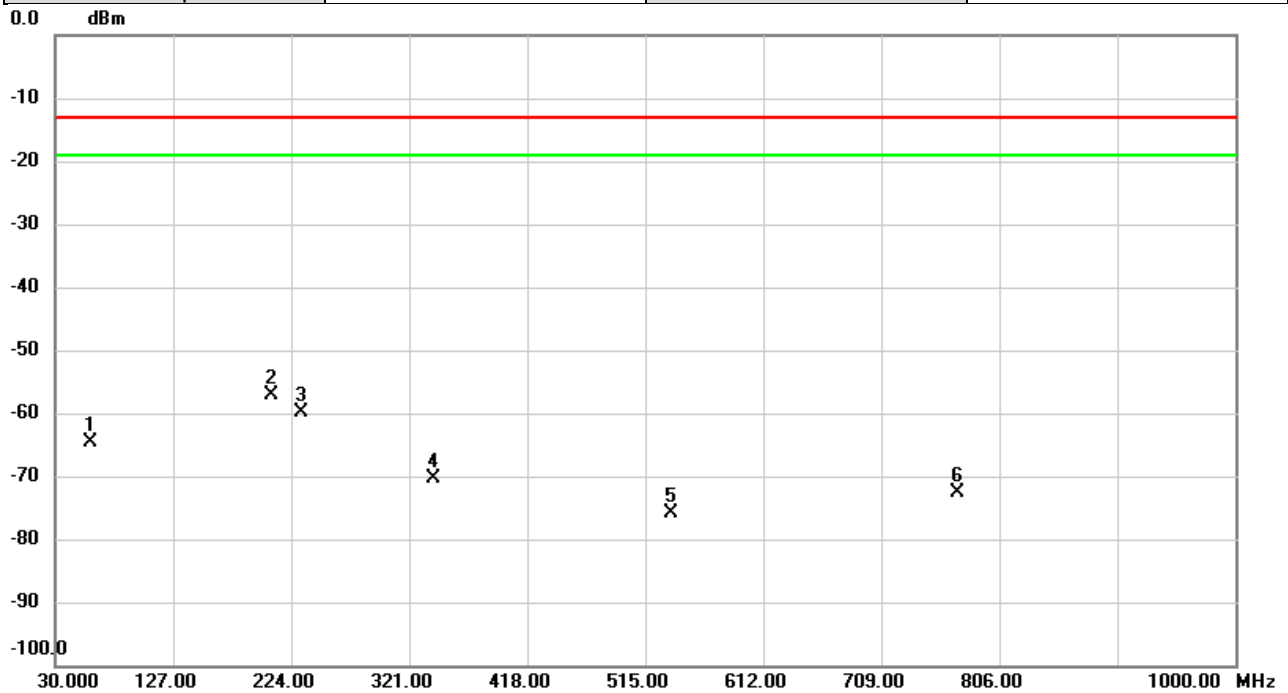


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.5850	-60.72	-3.95	-64.67	-13.00	-51.67	peak	
2	*	207.3483	-47.64	-9.53	-57.17	-13.00	-44.17	peak	
3		232.2127	-51.89	-8.02	-59.91	-13.00	-46.91	peak	
4		340.8527	-67.10	-3.22	-70.32	-13.00	-57.32	peak	
5		536.8897	-74.98	-0.82	-75.80	-13.00	-62.80	peak	
6		771.4680	-76.35	3.74	-72.61	-13.00	-59.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH18700	Polarization	Vertical
Temp	25°C	Hum.	59%

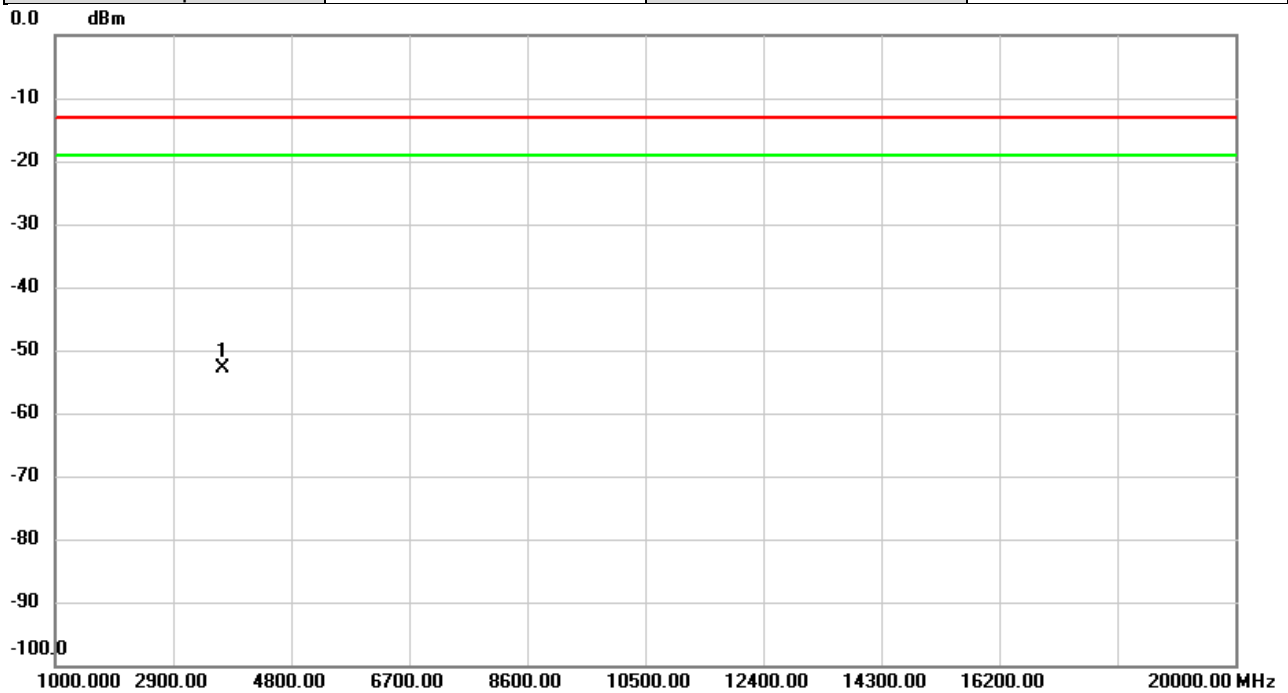


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3702.000	-64.55	11.72	-52.83	-13.00	-39.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH18700	Polarization	Horizontal
Temp	25°C	Hum.	59%

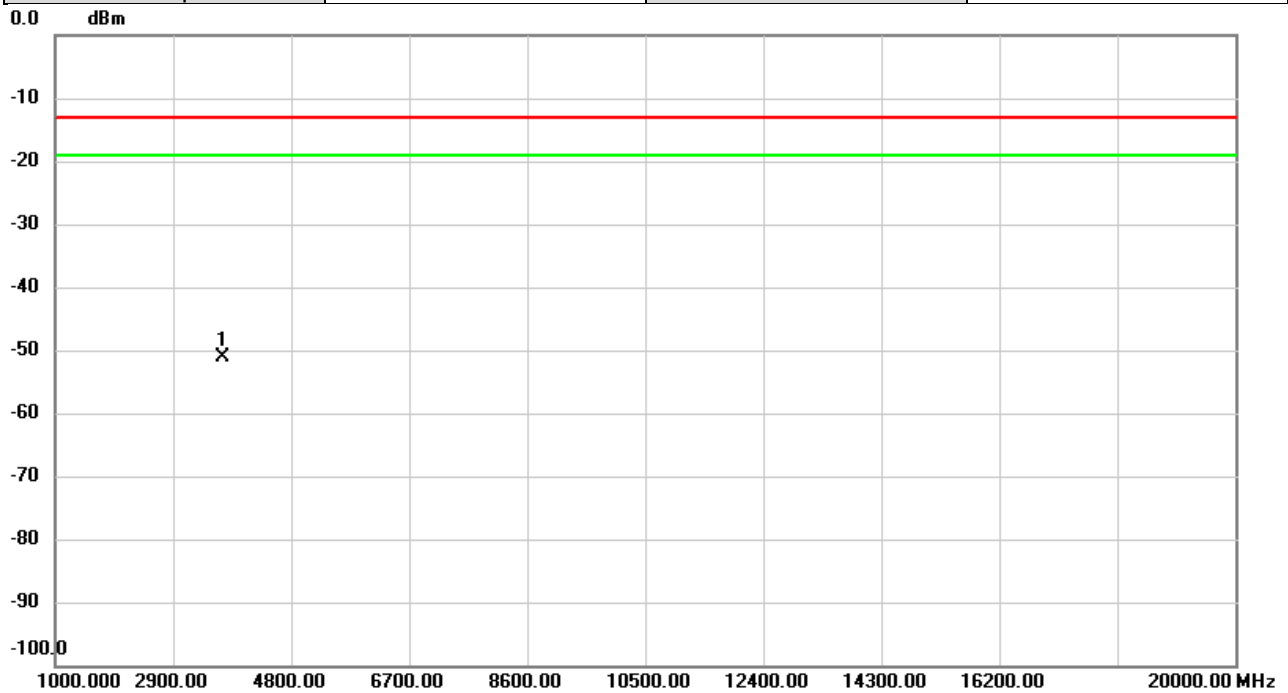


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3702.000	-62.15	11.13	-51.02	-13.00	-38.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH18900	Polarization	Vertical
Temp	25°C	Hum.	59%

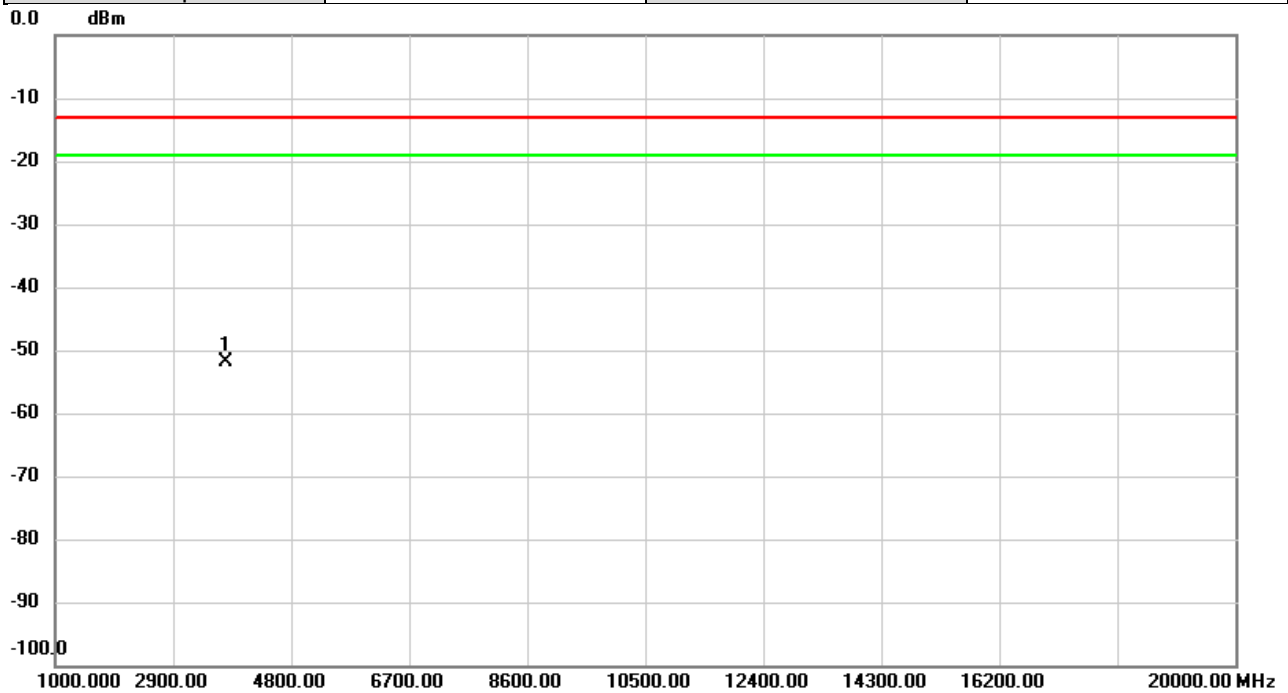


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3742.000	-63.38	11.57	-51.81	-13.00	-38.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH18900	Polarization	Horizontal
Temp	25°C	Hum.	59%

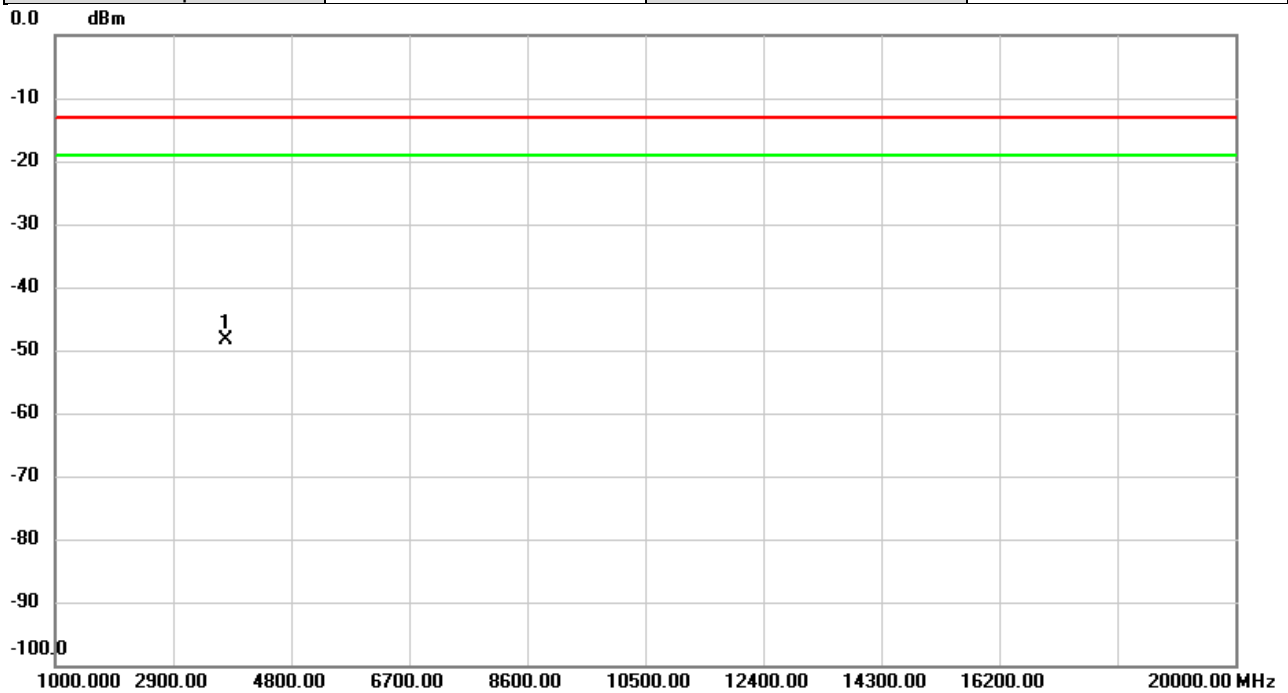


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3742.000	-59.59	11.13	-48.46	-13.00	-35.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH19100	Polarization	Vertical
Temp	25°C	Hum.	59%

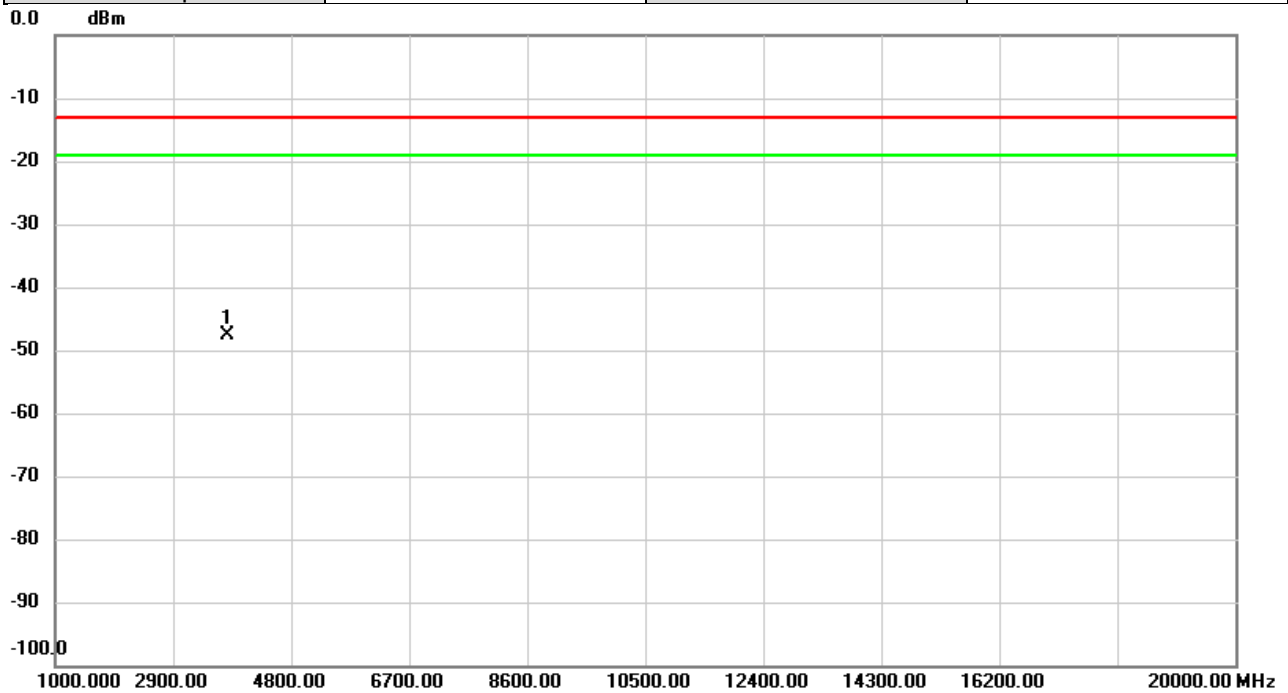


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3782.867	-59.13	11.61	-47.52	-13.00	-34.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/4/29
Test Channel	CH19100	Polarization	Horizontal
Temp	25°C	Hum.	59%

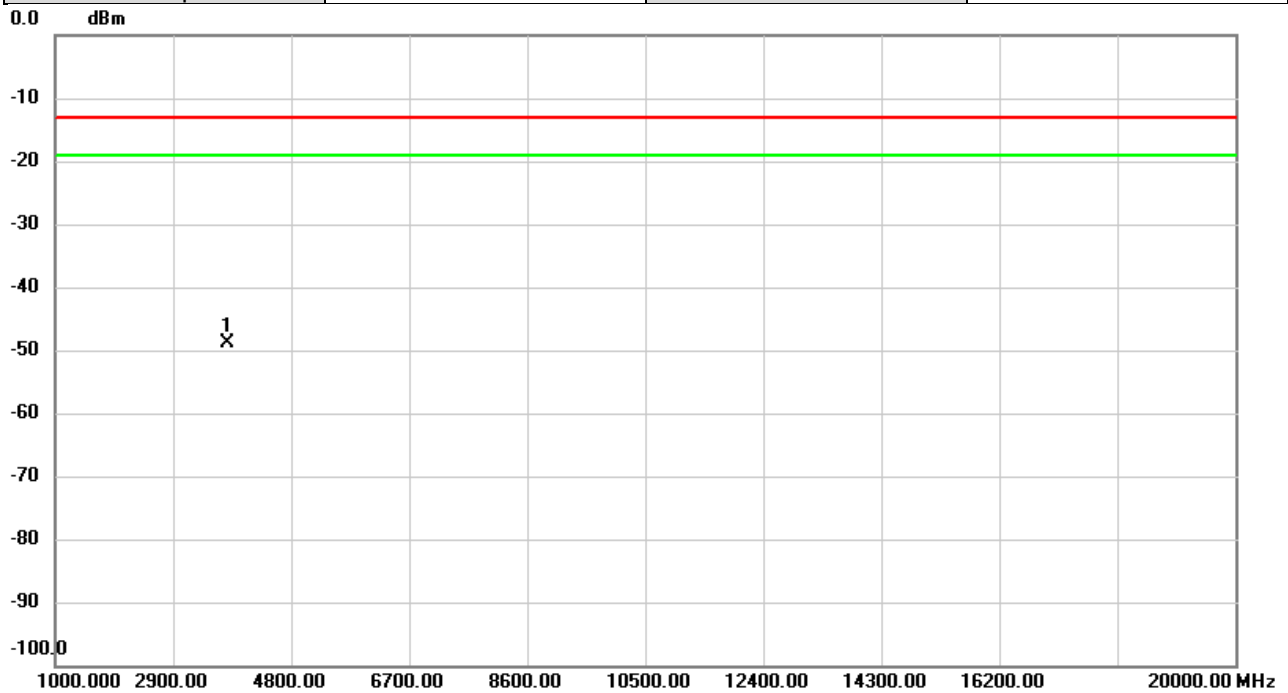


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3782.867	-60.42	11.43	-48.99	-13.00	-35.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/5/2
Test Channel	CH19100	Polarization	Vertical
Temp	27°C	Hum.	61%

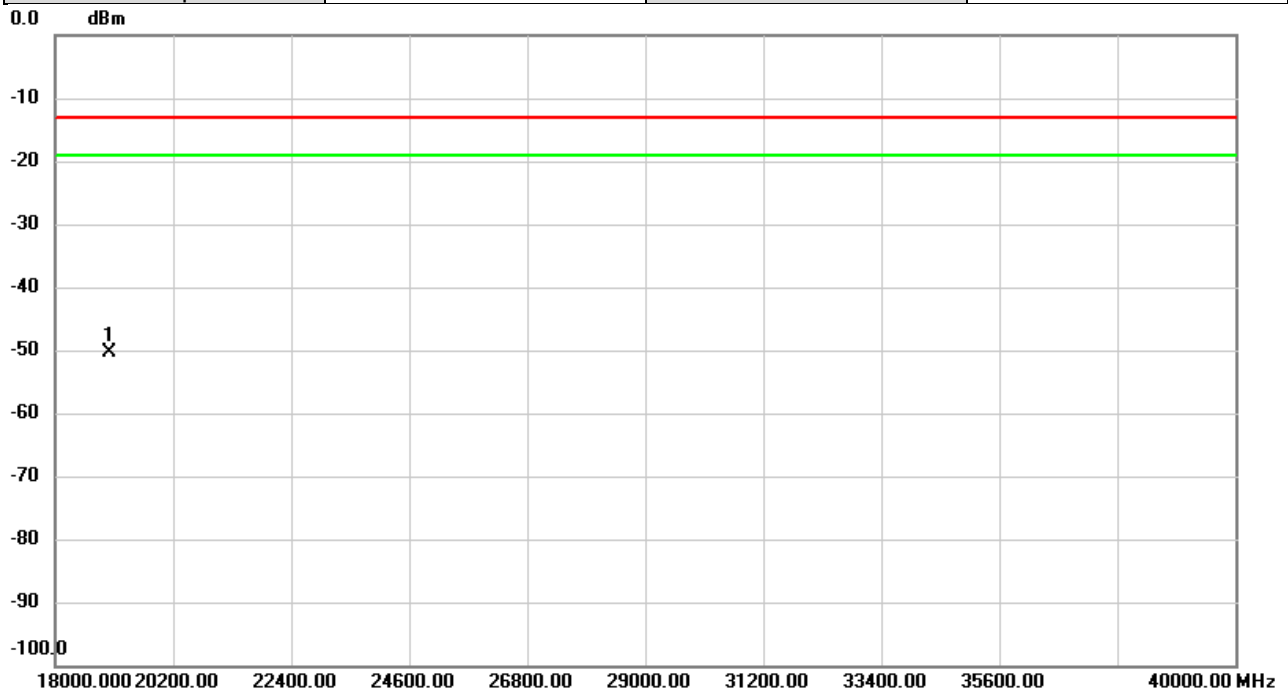


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19000.00	-52.82	2.42	-50.40	-13.00	-37.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/5/2
Test Channel	CH19100	Polarization	Horizontal
Temp	27°C	Hum.	61%

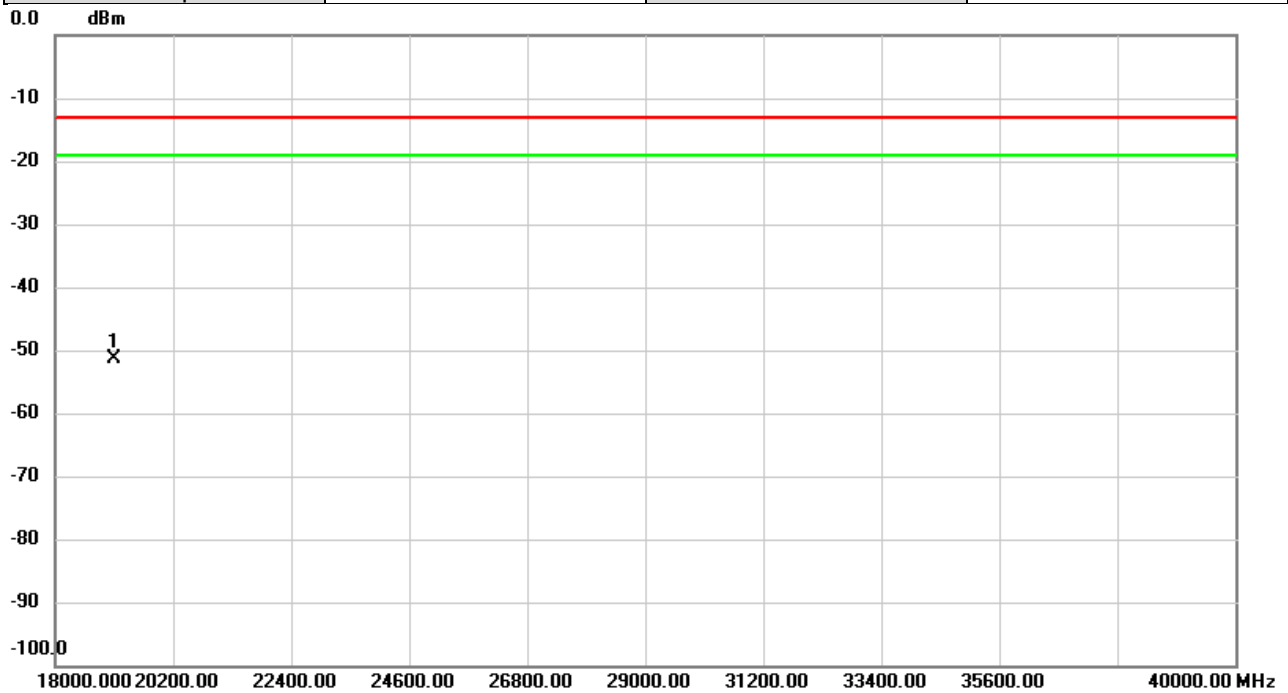


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19100.00	-52.64	1.27	-51.37	-13.00	-38.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/5/2
Test Channel	CH26590	Polarization	Vertical
Temp	27°C	Hum.	61%

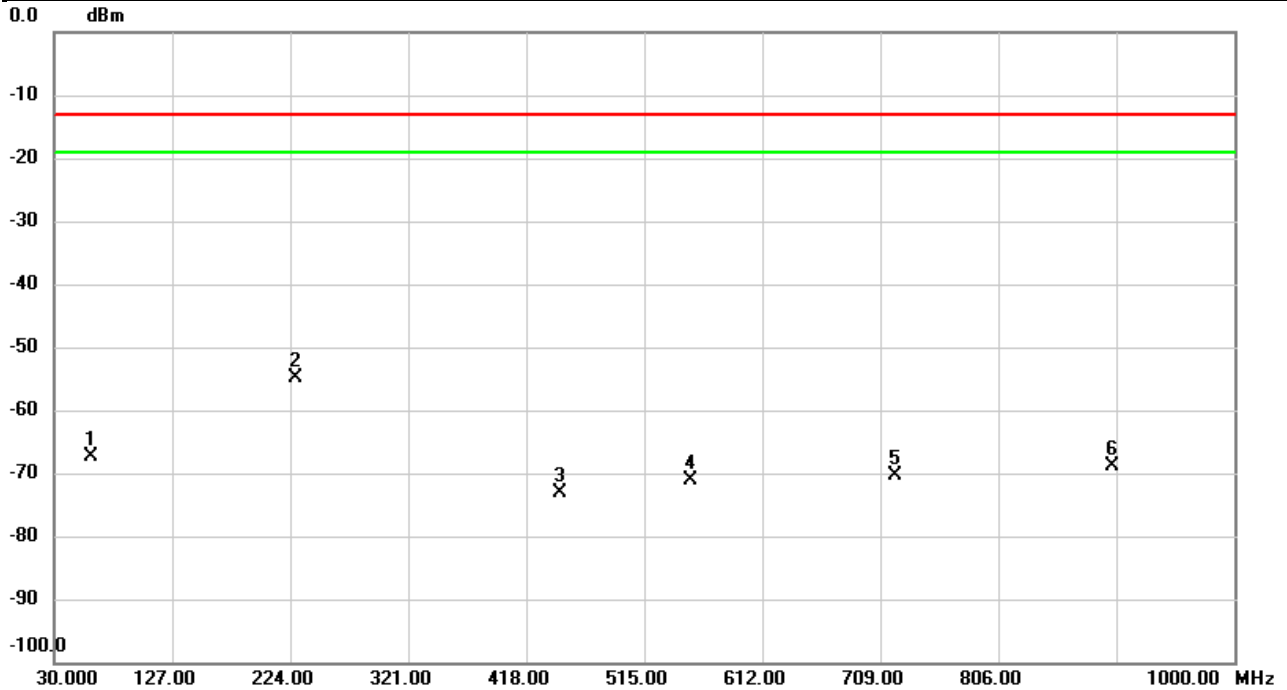


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		60.4580	-59.56	-7.73	-67.29	-13.00	-54.29	peak	
2	*	229.0763	-51.95	-2.90	-54.85	-13.00	-41.85	peak	
3		446.4210	-71.75	-1.36	-73.11	-13.00	-60.11	peak	
4		553.2503	-73.86	2.86	-71.00	-13.00	-58.00	peak	
5		721.2543	-74.14	3.81	-70.33	-13.00	-57.33	peak	
6		900.0577	-75.56	6.67	-68.89	-13.00	-55.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/5/2
Test Channel	CH26590	Polarization	Horizontal
Temp	27°C	Hum.	61%

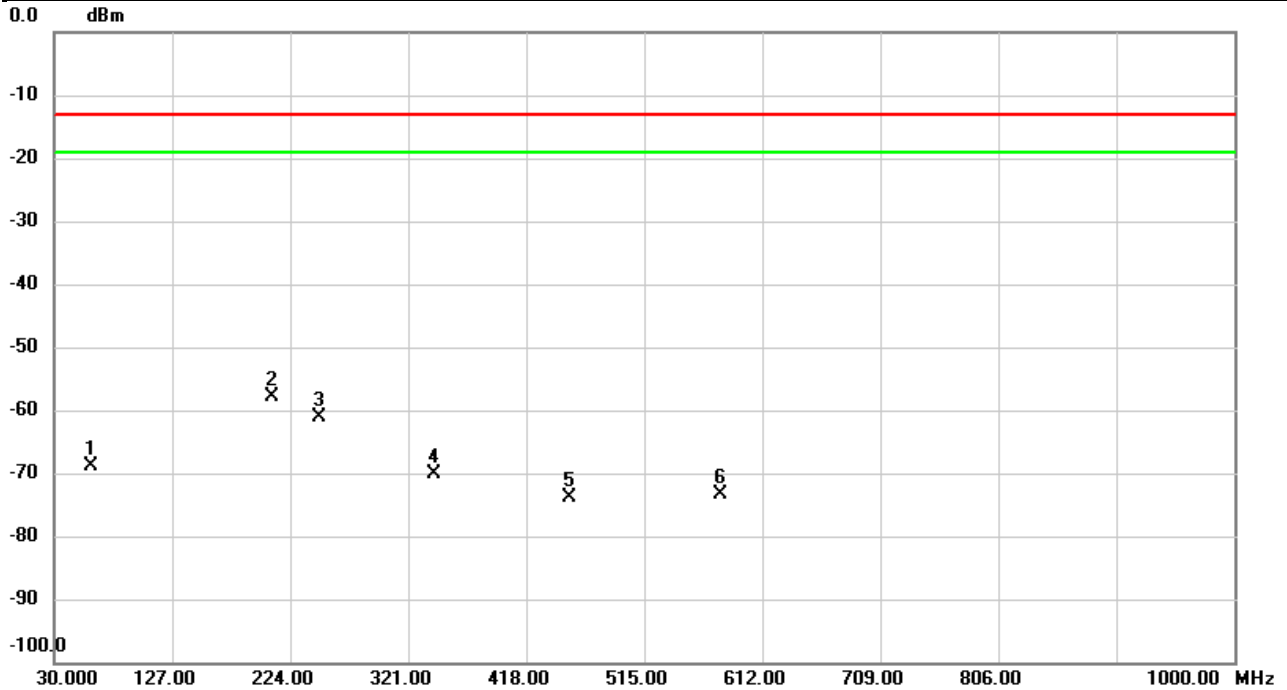


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		59.9407	-64.79	-4.08	-68.87	-13.00	-55.87	peak	
2	*	208.5123	-48.42	-9.52	-57.94	-13.00	-44.94	peak	
3		248.0883	-53.09	-8.10	-61.19	-13.00	-48.19	peak	
4		342.5987	-67.00	-3.09	-70.09	-13.00	-57.09	peak	
5		454.0193	-72.03	-1.88	-73.91	-13.00	-60.91	peak	
6		577.7590	-73.33	-0.14	-73.47	-13.00	-60.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26140	Polarization	Vertical
Temp	25°C	Hum.	59%

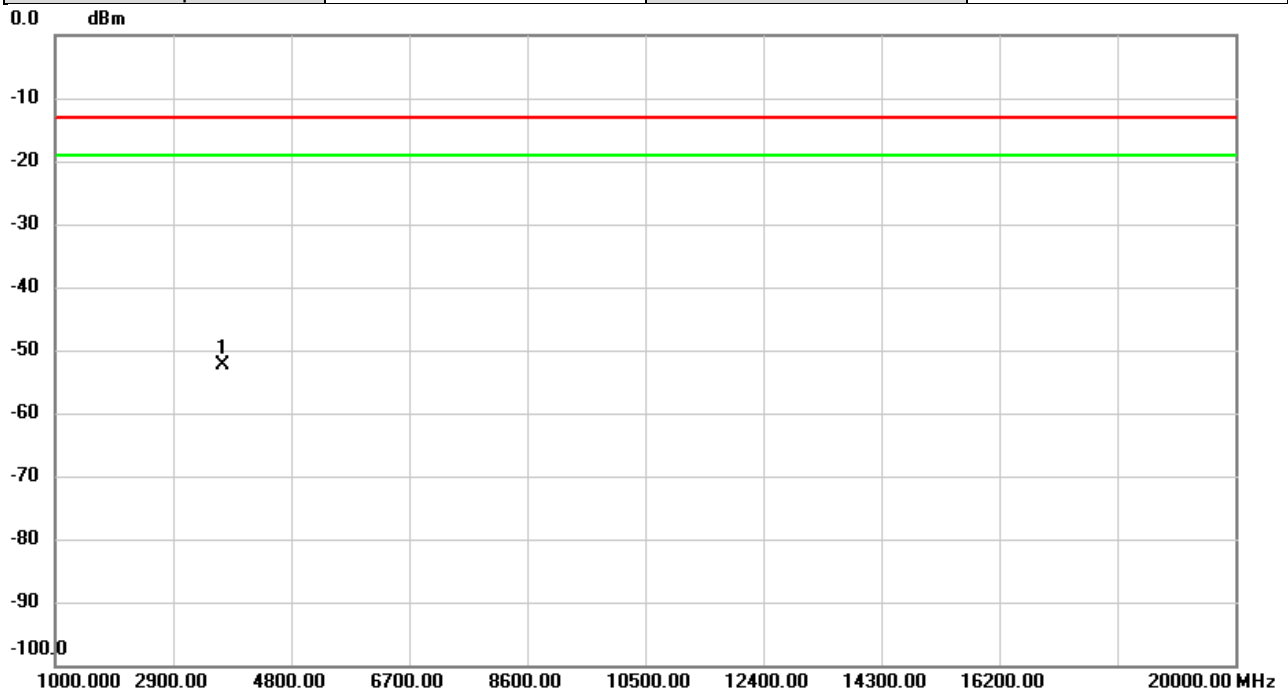


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3702.000	-63.98	11.72	-52.26	-13.00	-39.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26140	Polarization	Horizontal
Temp	25°C	Hum.	59%

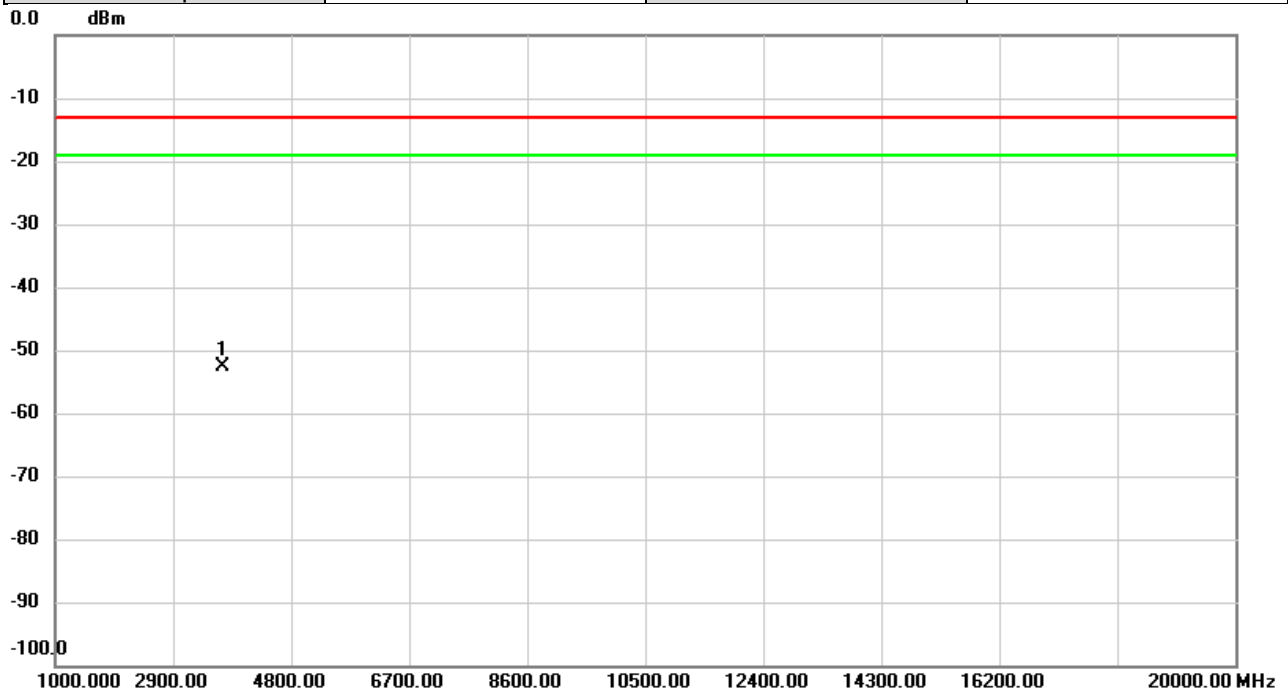


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3702.000	-63.66	11.13	-52.53	-13.00	-39.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26365	Polarization	Vertical
Temp	25°C	Hum.	59%

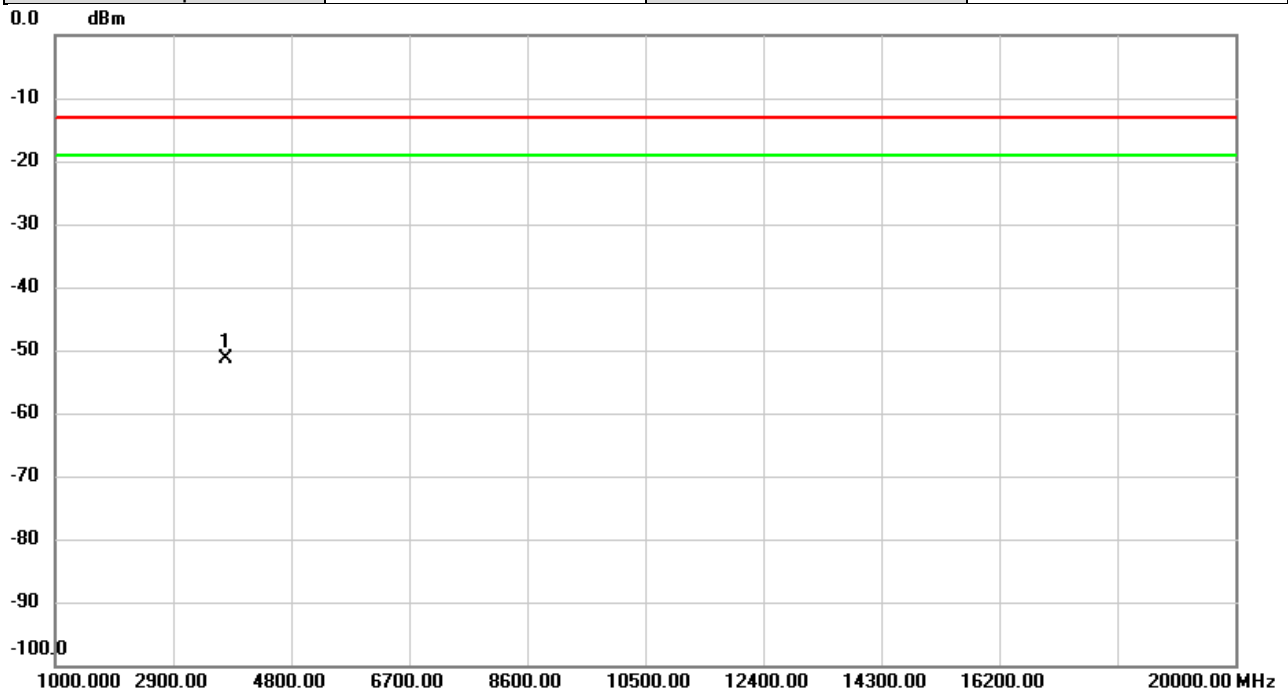


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3747.000	-63.01	11.55	-51.46	-13.00	-38.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26365	Polarization	Horizontal
Temp	25°C	Hum.	59%

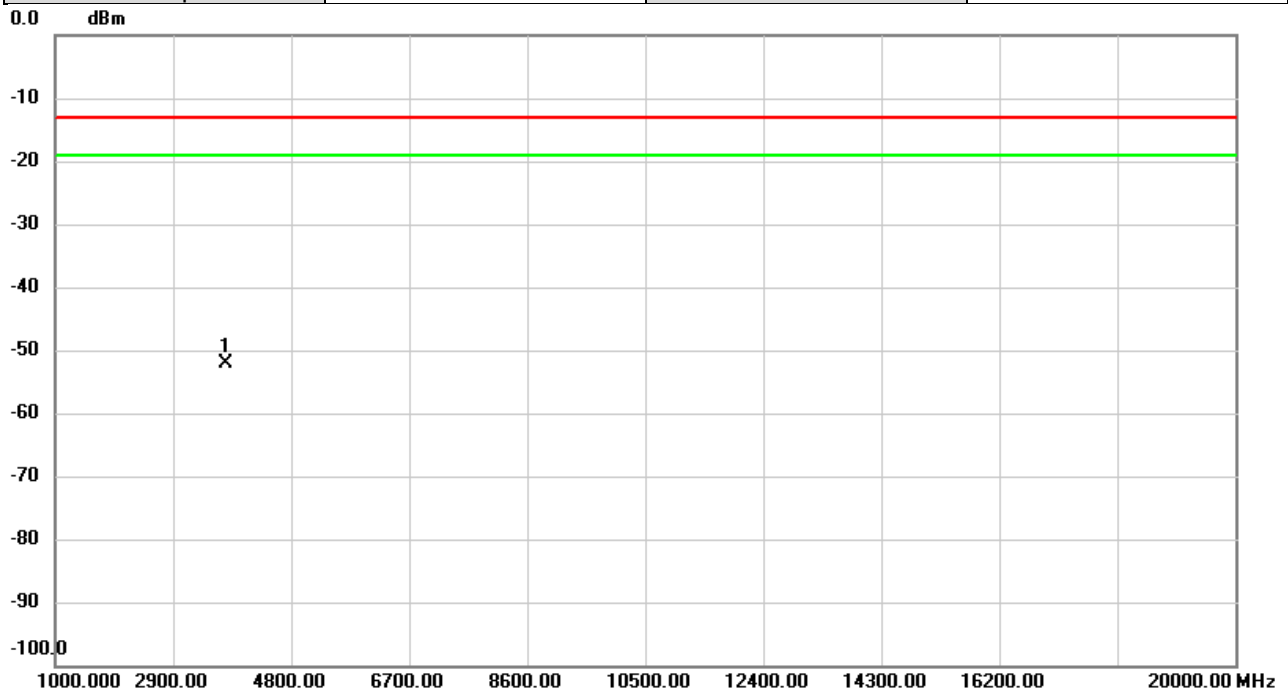


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3747.000	-63.37	11.13	-52.24	-13.00	-39.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26590	Polarization	Vertical
Temp	25°C	Hum.	59%

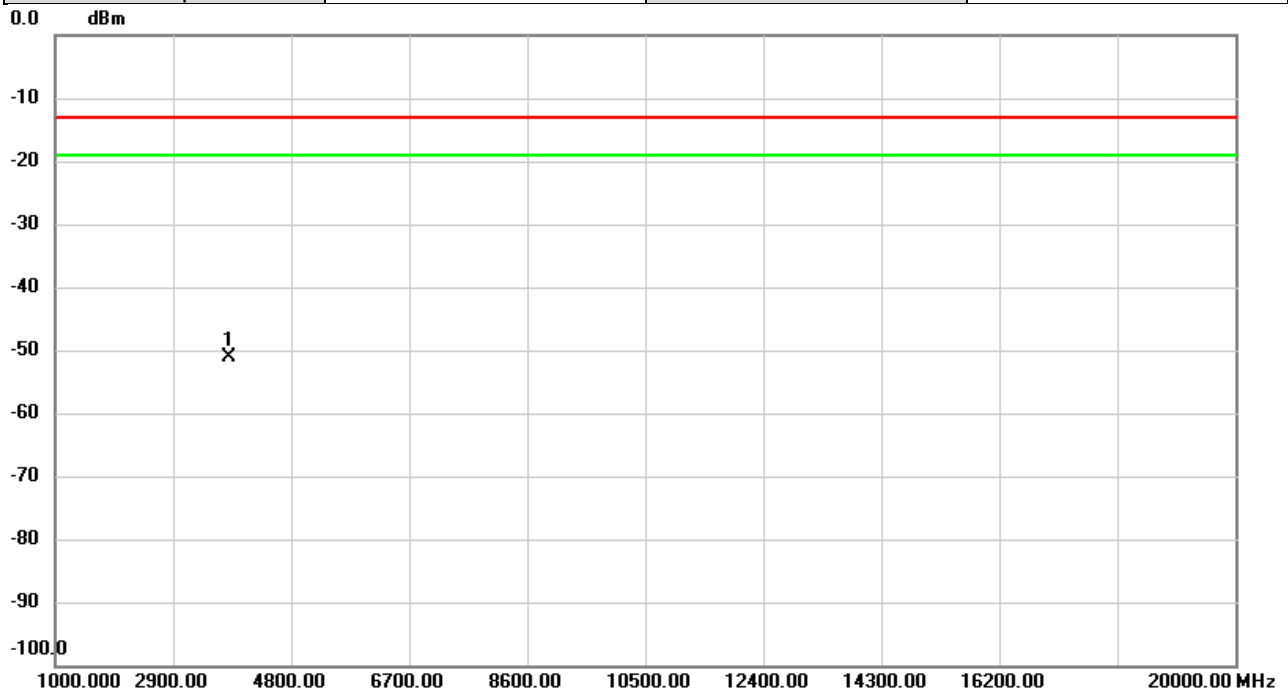


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3792.000	-62.82	11.63	-51.19	-13.00	-38.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/4/29
Test Channel	CH26590	Polarization	Horizontal
Temp	25°C	Hum.	59%

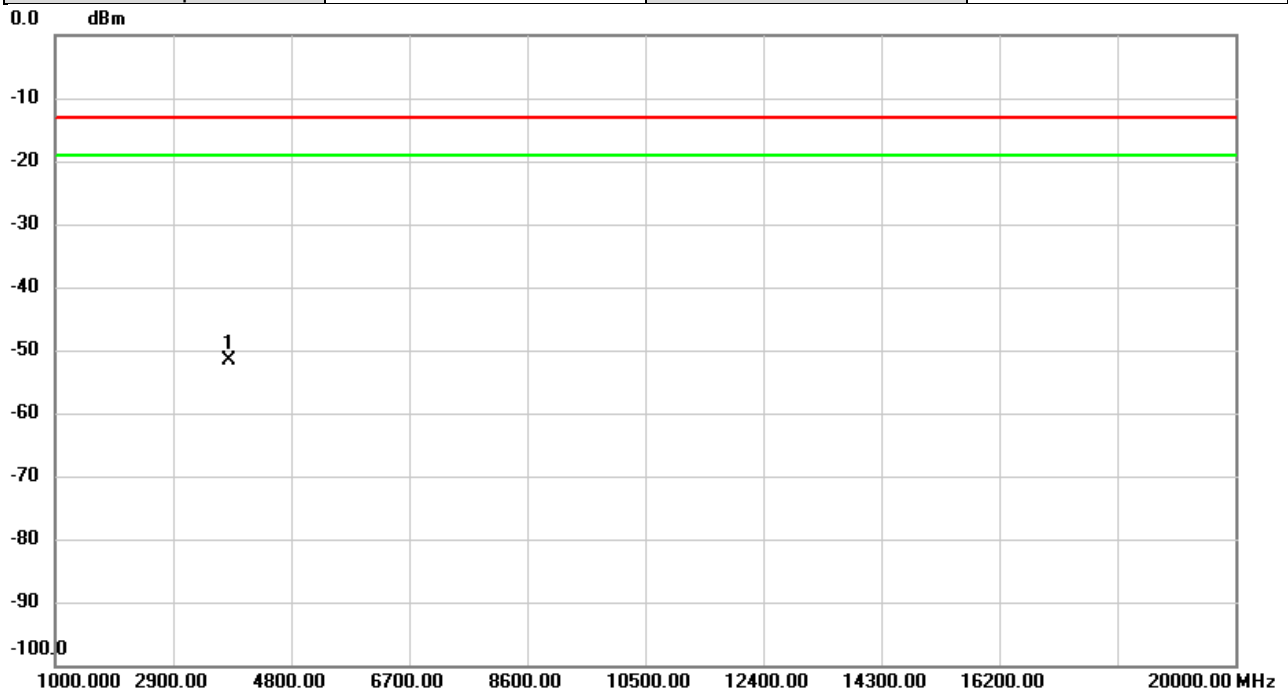


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3792.000	-63.04	11.52	-51.52	-13.00	-38.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/5/2
Test Channel	CH26590	Polarization	Vertical
Temp	27°C	Hum.	61%

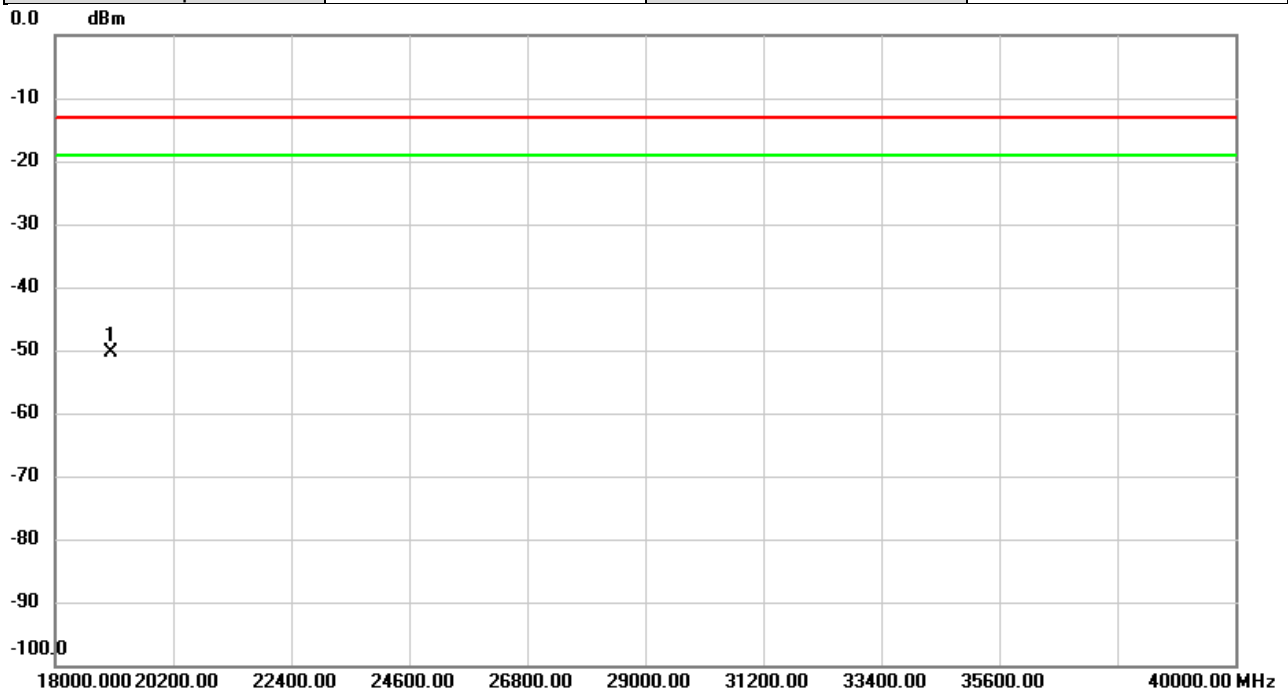


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19050.00	-52.75	2.36	-50.39	-13.00	-37.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/5/2
Test Channel	CH26590	Polarization	Horizontal
Temp	27°C	Hum.	61%

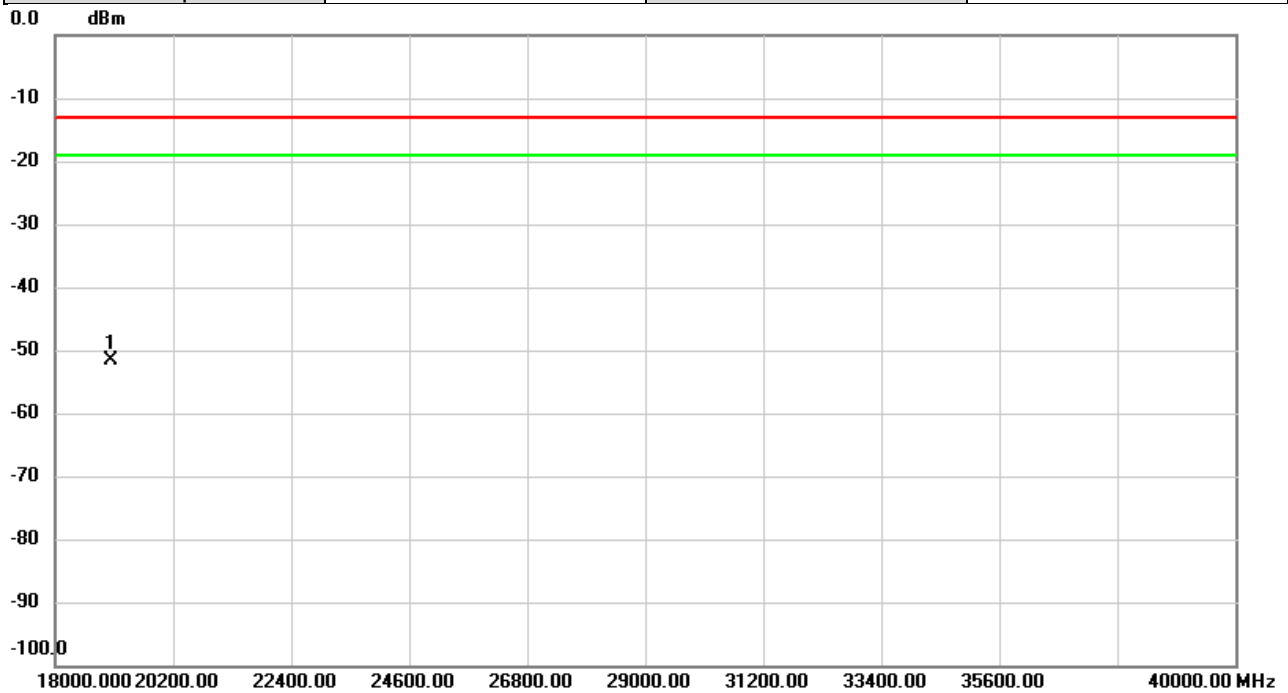


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	19050.00	-53.02	1.32	-51.70	-13.00	-38.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

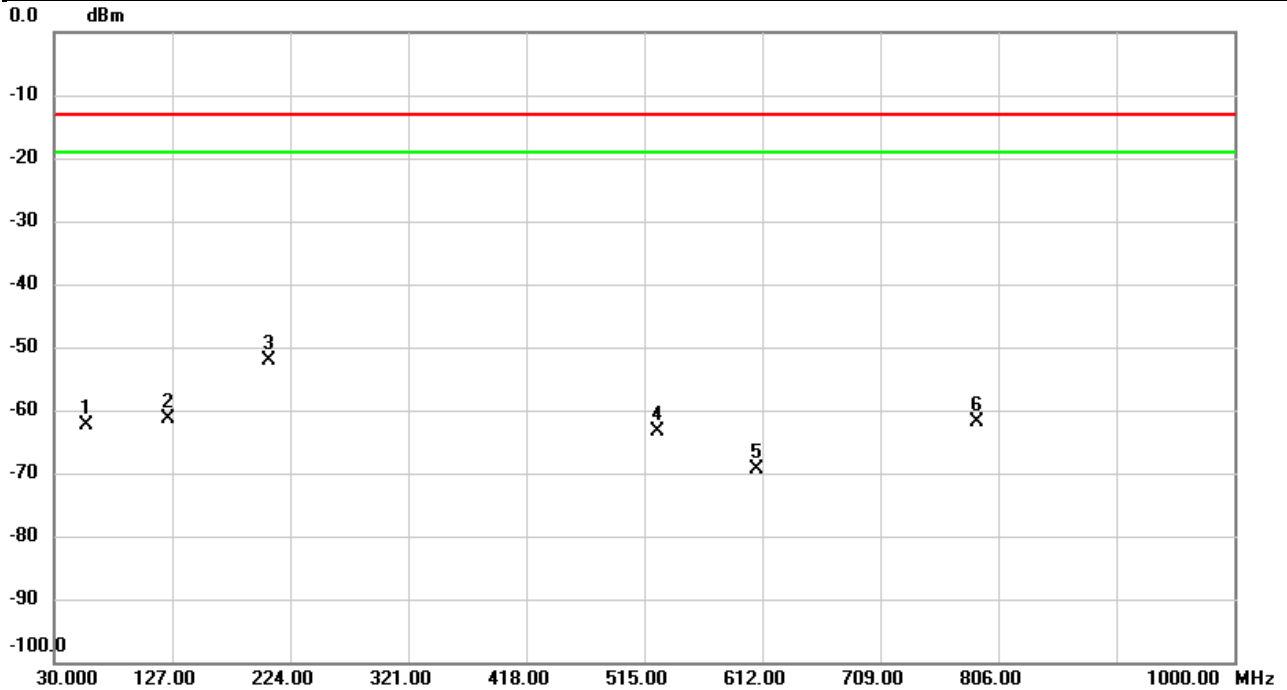


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.9013	-57.20	-5.15	-62.35	-13.00	-49.35	peak	
2		124.1223	-56.90	-4.40	-61.30	-13.00	-48.30	peak	
3	*	206.6693	-50.90	-1.24	-52.14	-13.00	-39.14	peak	
4		525.5082	-66.94	3.63	-63.31	-13.00	-50.31	peak	
5		607.5057	-74.76	5.42	-69.34	-13.00	-56.34	peak	
6		788.2490	-67.97	5.99	-61.98	-13.00	-48.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

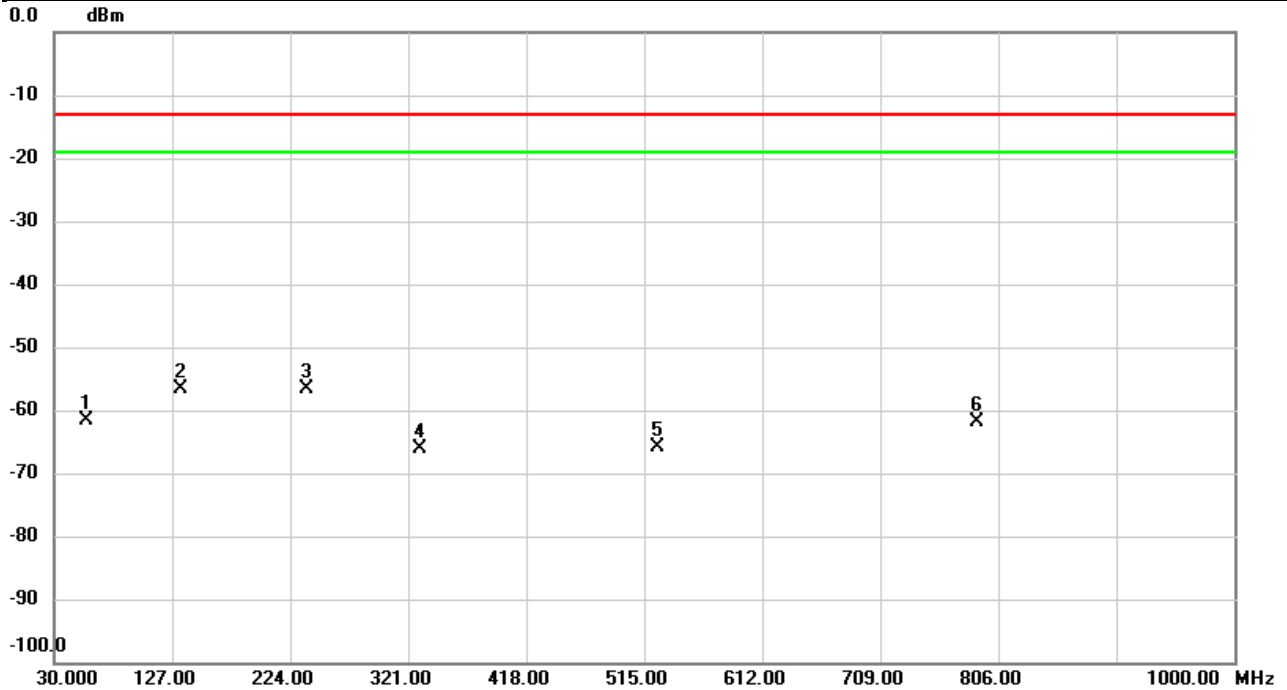


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.7396	-60.82	-0.78	-61.60	-13.00	-48.60	peak	
2		134.3720	-52.62	-4.03	-56.65	-13.00	-43.65	peak	
3	*	237.8063	-50.53	-6.02	-56.55	-13.00	-43.55	peak	
4		330.6030	-64.25	-1.82	-66.07	-13.00	-53.07	peak	
5		525.5082	-66.92	1.13	-65.79	-13.00	-52.79	peak	
6		788.2813	-67.88	6.06	-61.82	-13.00	-48.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-5A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

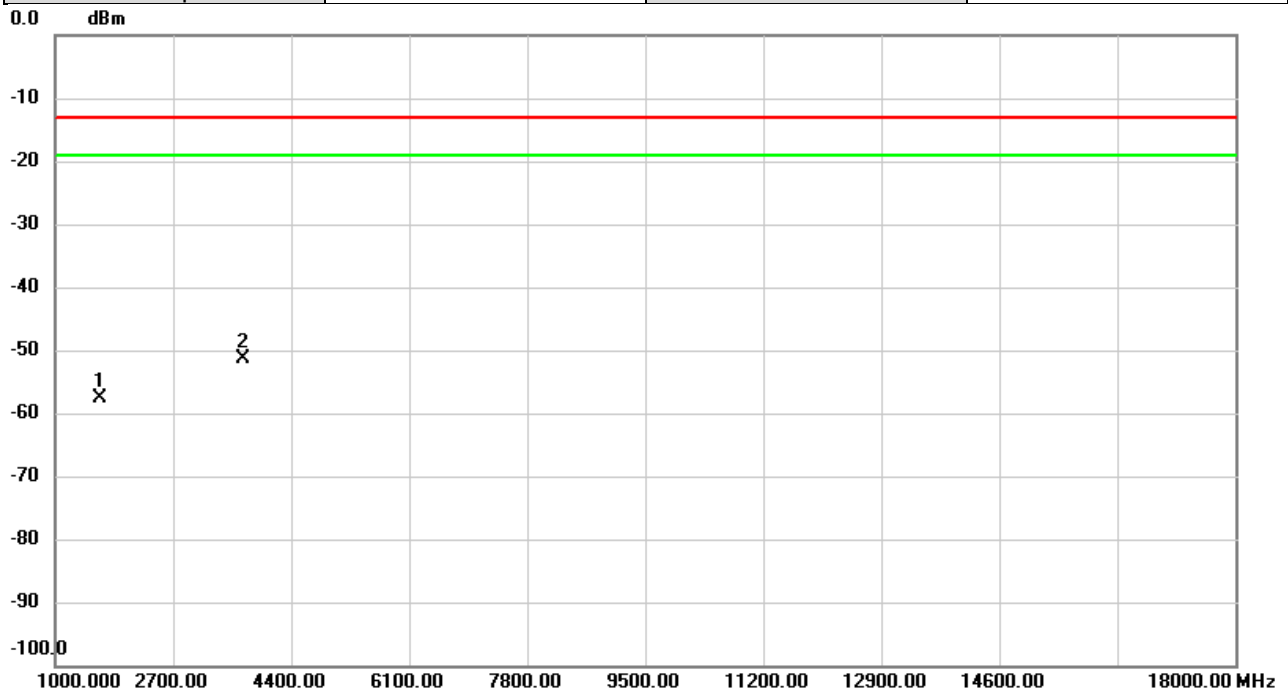


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-63.38	5.72	-57.66	-13.00	-44.66	peak	
2	*	3702.000	-63.03	11.72	-51.31	-13.00	-38.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-5A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

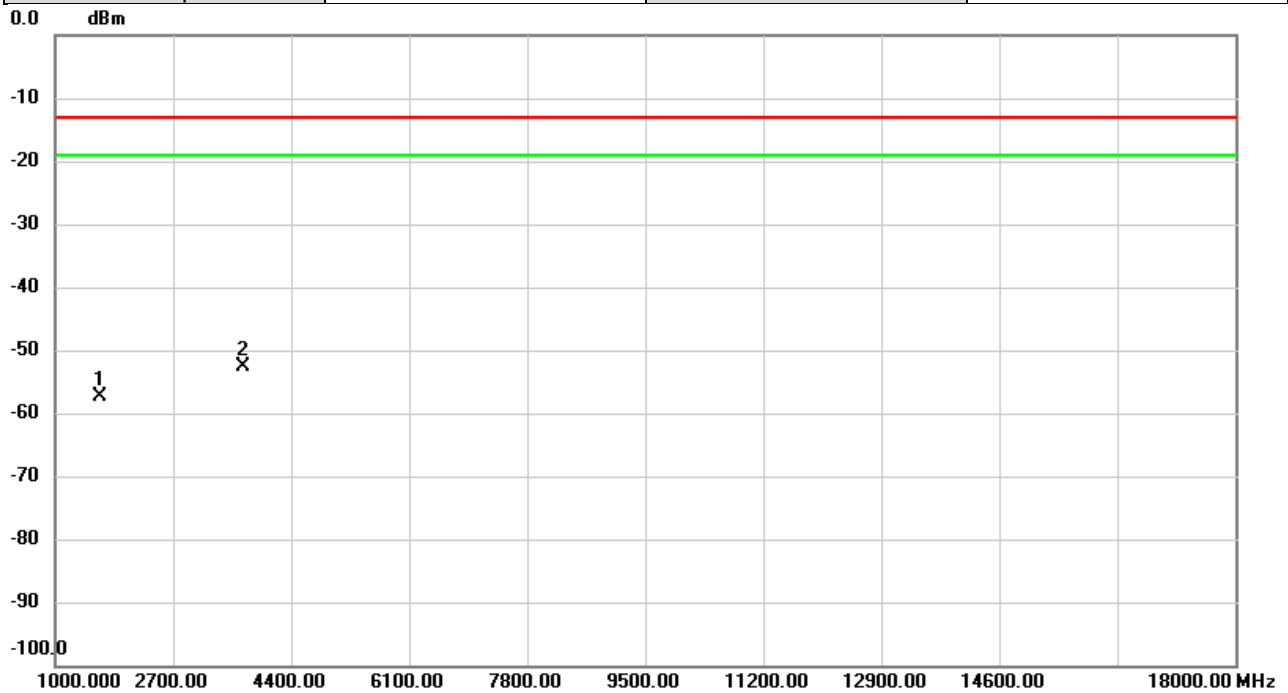


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-62.82	5.42	-57.40	-13.00	-44.40	peak	
2	*	3702.000	-63.81	11.13	-52.68	-13.00	-39.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

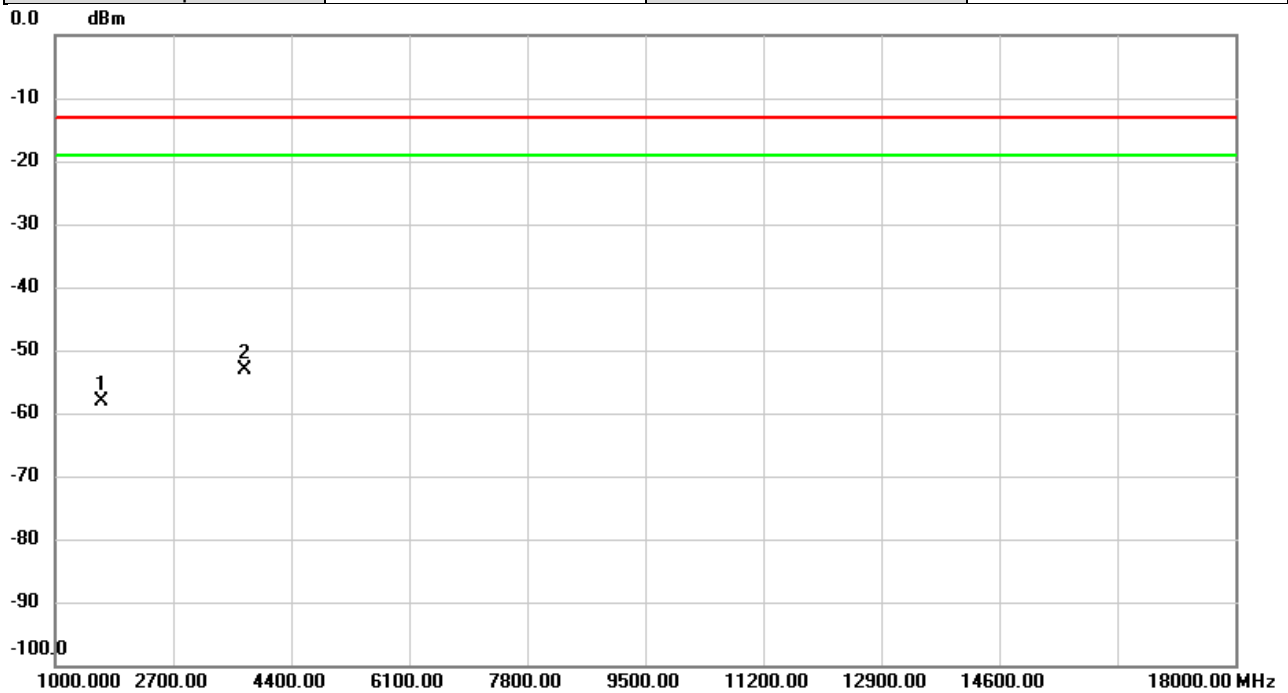


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1664.000	-63.89	5.75	-58.14	-13.00	-45.14	peak	
2	*	3742.000	-64.66	11.57	-53.09	-13.00	-40.09	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

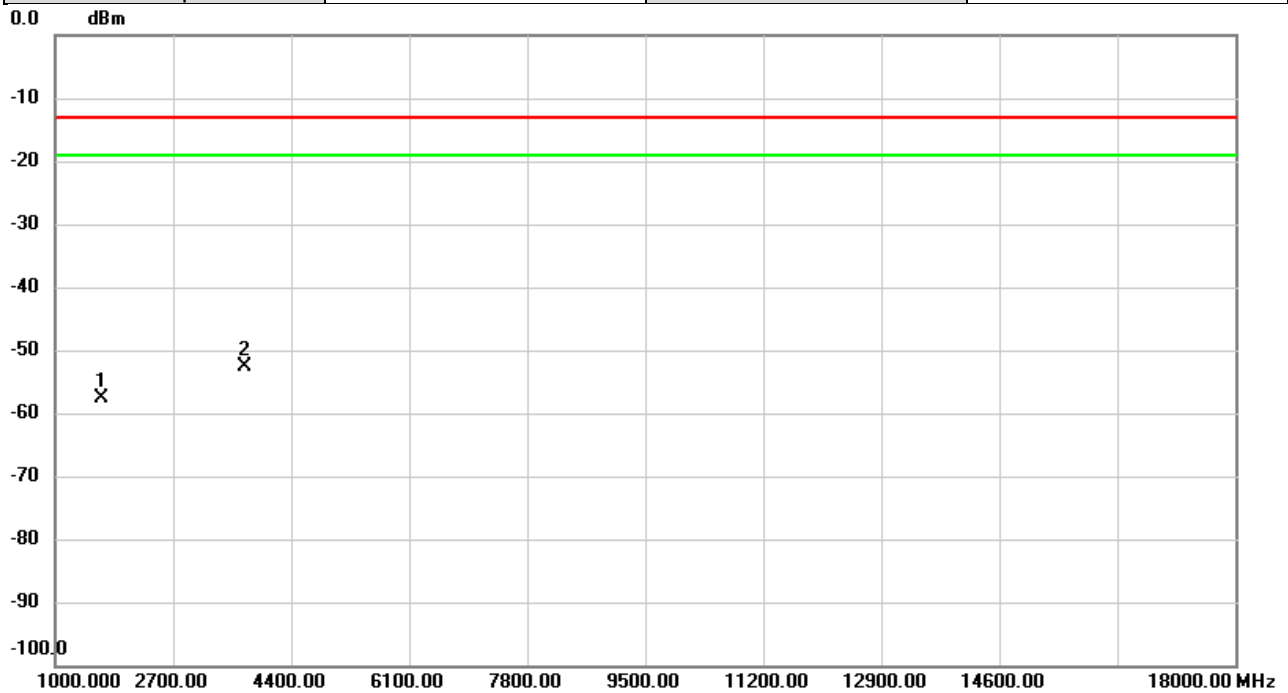


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1664.000	-63.00	5.46	-57.54	-13.00	-44.54	peak	
2	*	3742.000	-63.68	11.13	-52.55	-13.00	-39.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-5A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

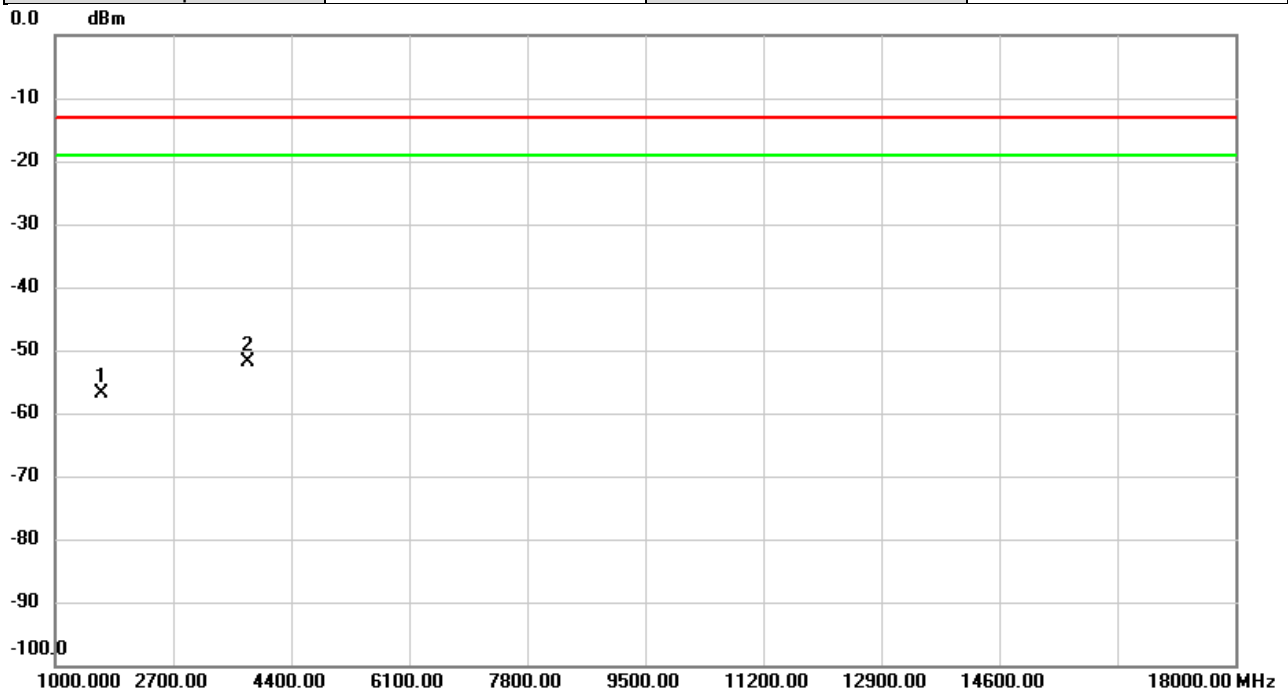


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1679.000	-62.71	5.77	-56.94	-13.00	-43.94	peak	
2	*	3782.000	-63.49	11.61	-51.88	-13.00	-38.88	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-5A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

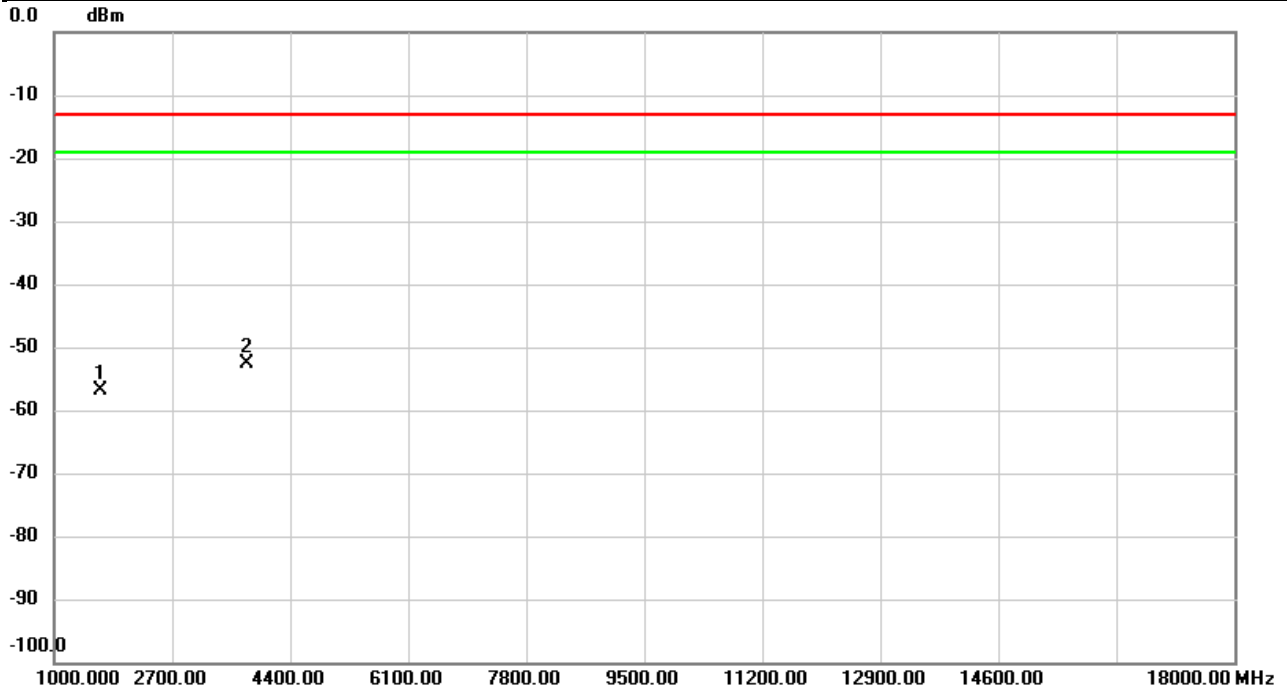


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1679.000	-62.31	5.50	-56.81	-13.00	-43.81	peak	
2	*	3782.000	-64.04	11.42	-52.62	-13.00	-39.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

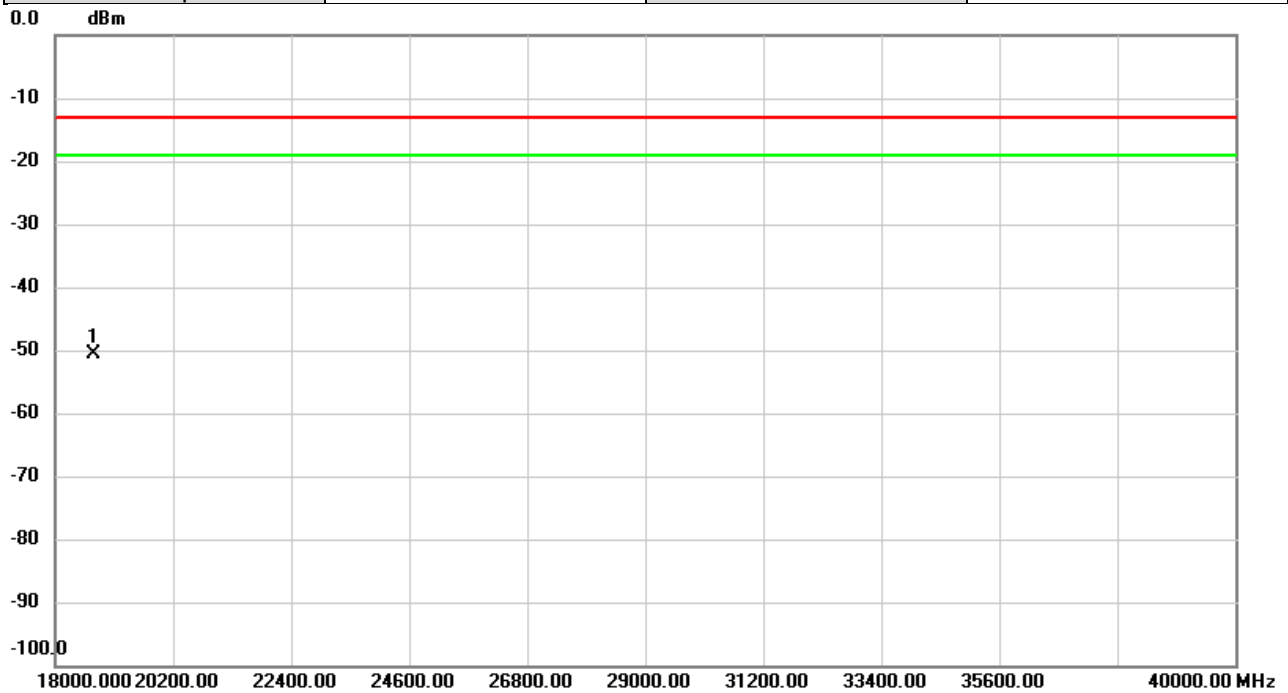


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-53.28	2.54	-50.74	-13.00	-37.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-5A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

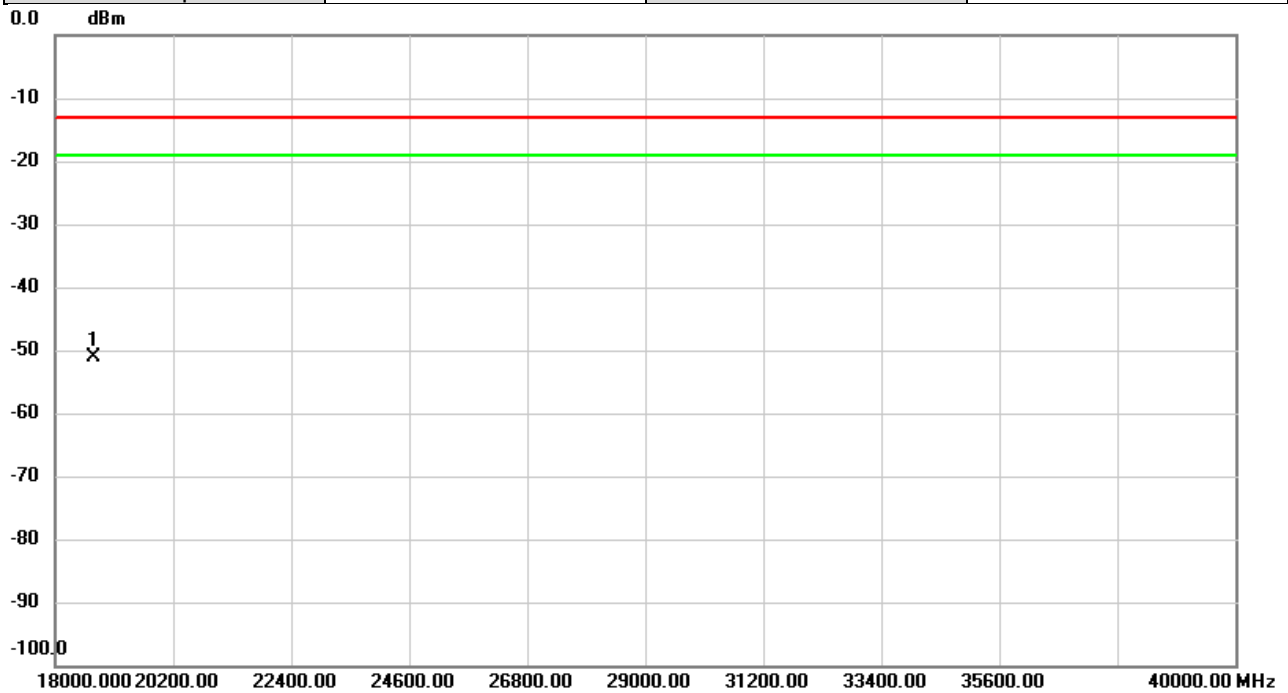


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-52.57	1.56	-51.01	-13.00	-38.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

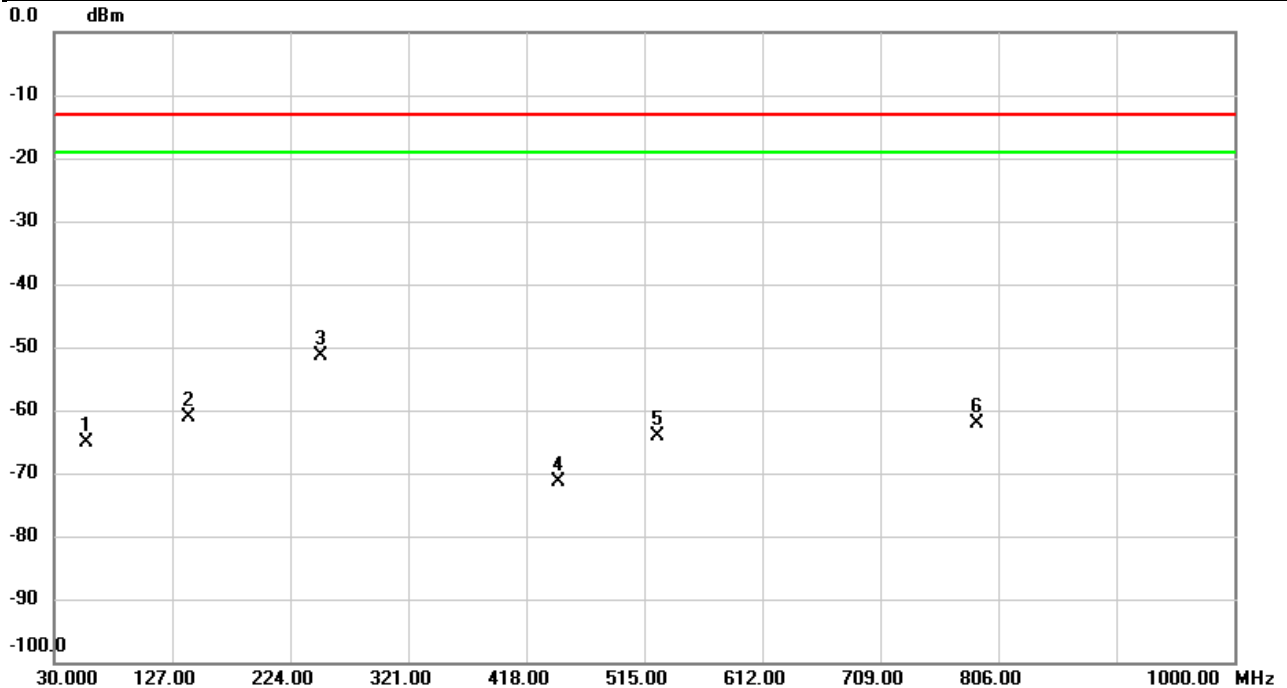


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.3517	-60.13	-5.07	-65.20	-13.00	-52.20	peak	
2		140.9680	-60.08	-1.16	-61.24	-13.00	-48.24	peak	
3	*	249.0907	-50.57	-0.72	-51.29	-13.00	-38.29	peak	
4		444.3517	-72.13	0.74	-71.39	-13.00	-58.39	peak	
5		525.5082	-67.87	3.63	-64.24	-13.00	-51.24	peak	
6		788.2490	-68.18	5.99	-62.19	-13.00	-49.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

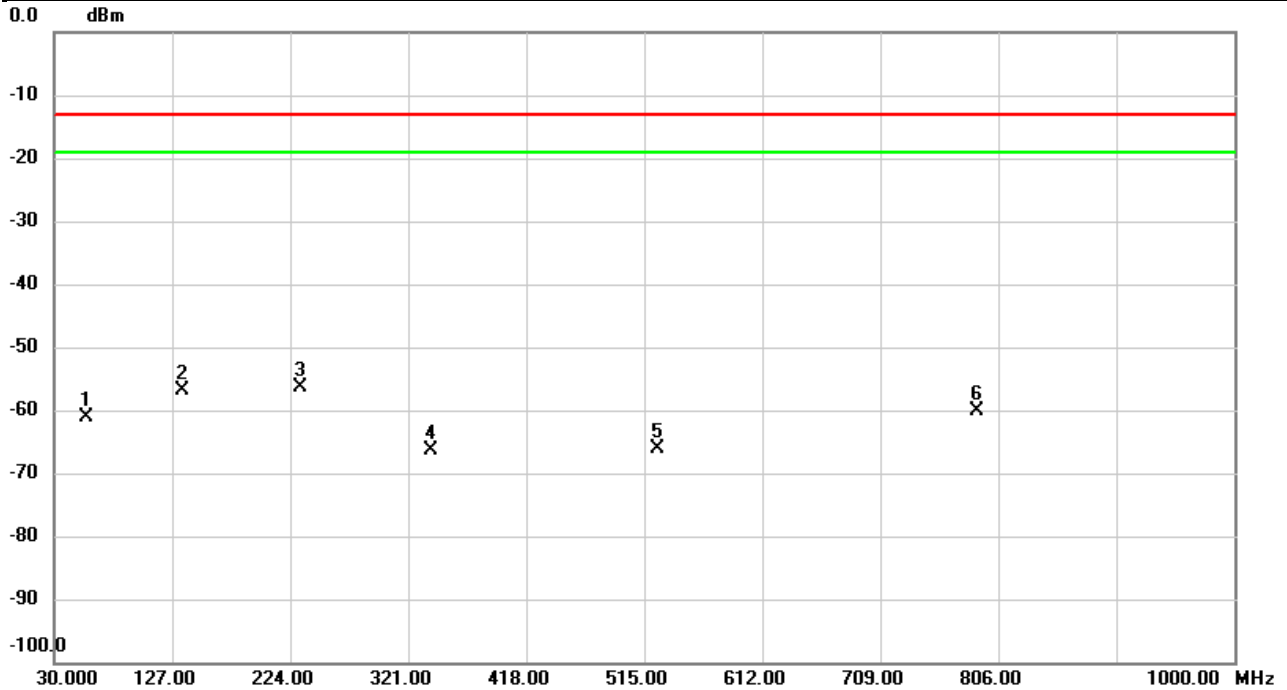


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		56.8690	-60.30	-0.83	-61.13	-13.00	-48.13	peak	
2		135.1480	-52.82	-3.96	-56.78	-13.00	-43.78	peak	
3	*	232.3743	-50.57	-5.87	-56.44	-13.00	-43.44	peak	
4		339.5270	-65.10	-1.16	-66.26	-13.00	-53.26	peak	
5		525.5082	-67.37	1.13	-66.24	-13.00	-53.24	peak	
6		788.2490	-66.20	6.06	-60.14	-13.00	-47.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

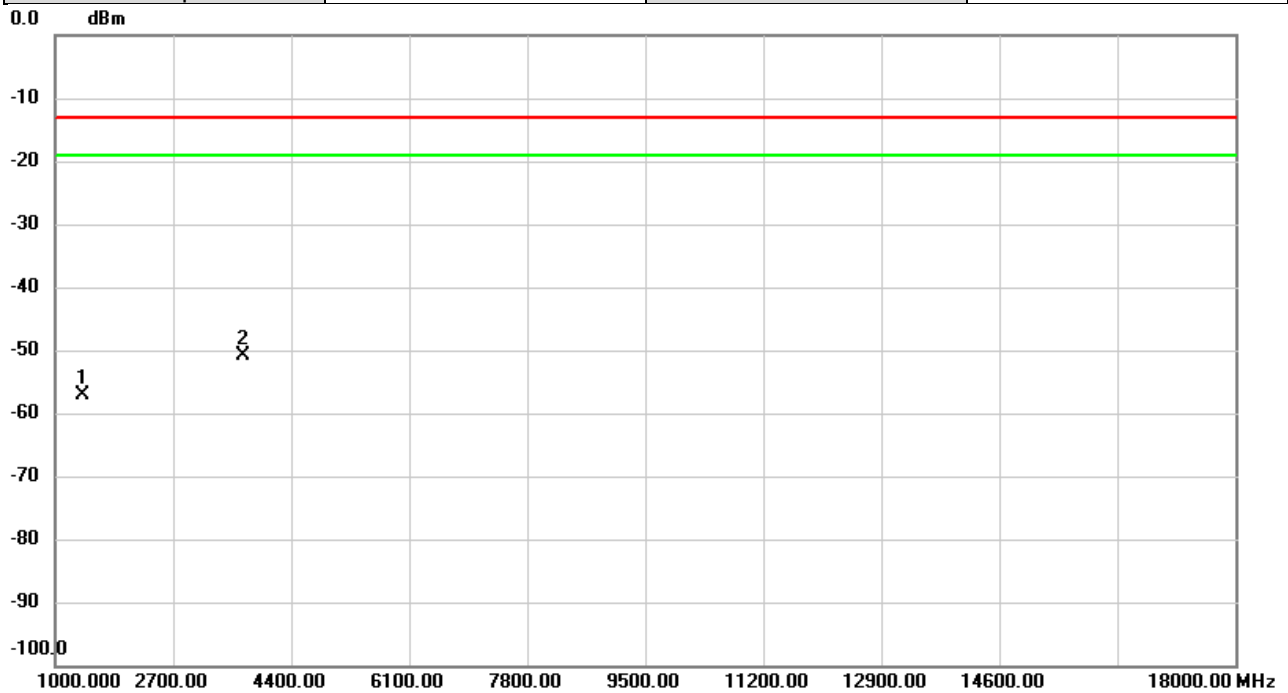


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-62.08	4.93	-57.15	-13.00	-44.15	peak	
2	*	3702.000	-62.70	11.72	-50.98	-13.00	-37.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

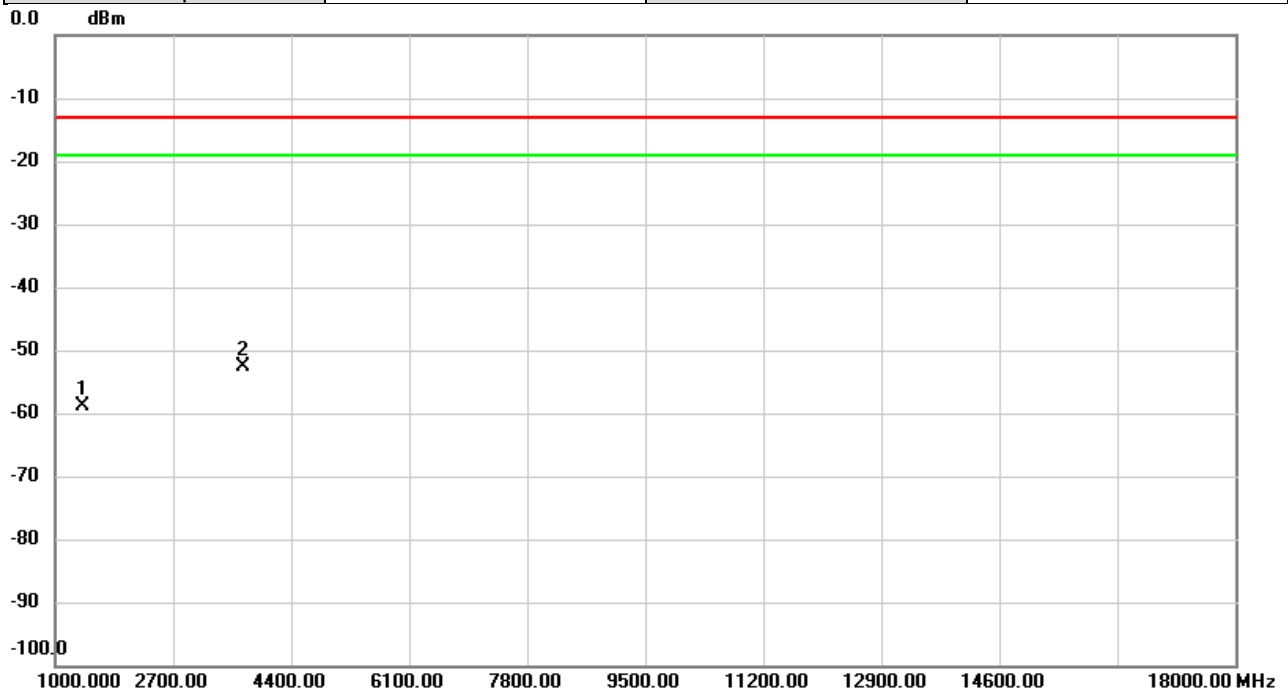


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1399.000	-63.47	4.50	-58.97	-13.00	-45.97	peak	
2	*	3702.000	-63.84	11.13	-52.71	-13.00	-39.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

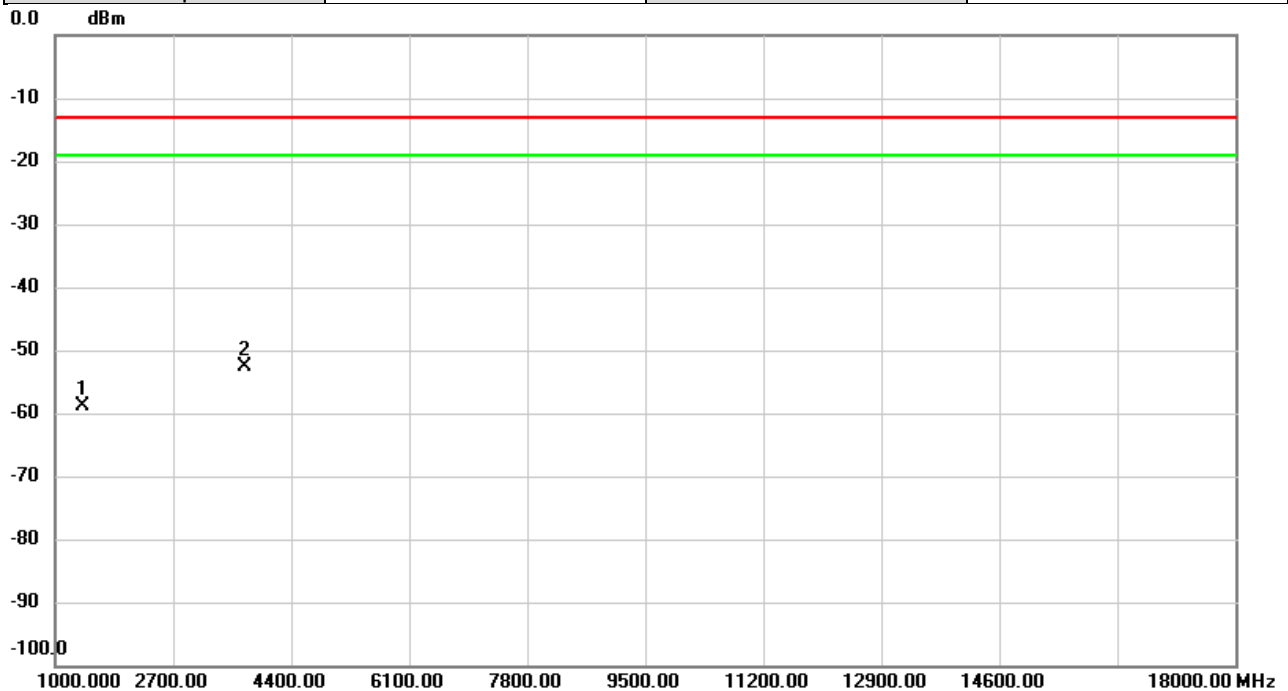


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-63.79	4.91	-58.88	-13.00	-45.88	peak	
2	*	3742.000	-64.09	11.57	-52.52	-13.00	-39.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

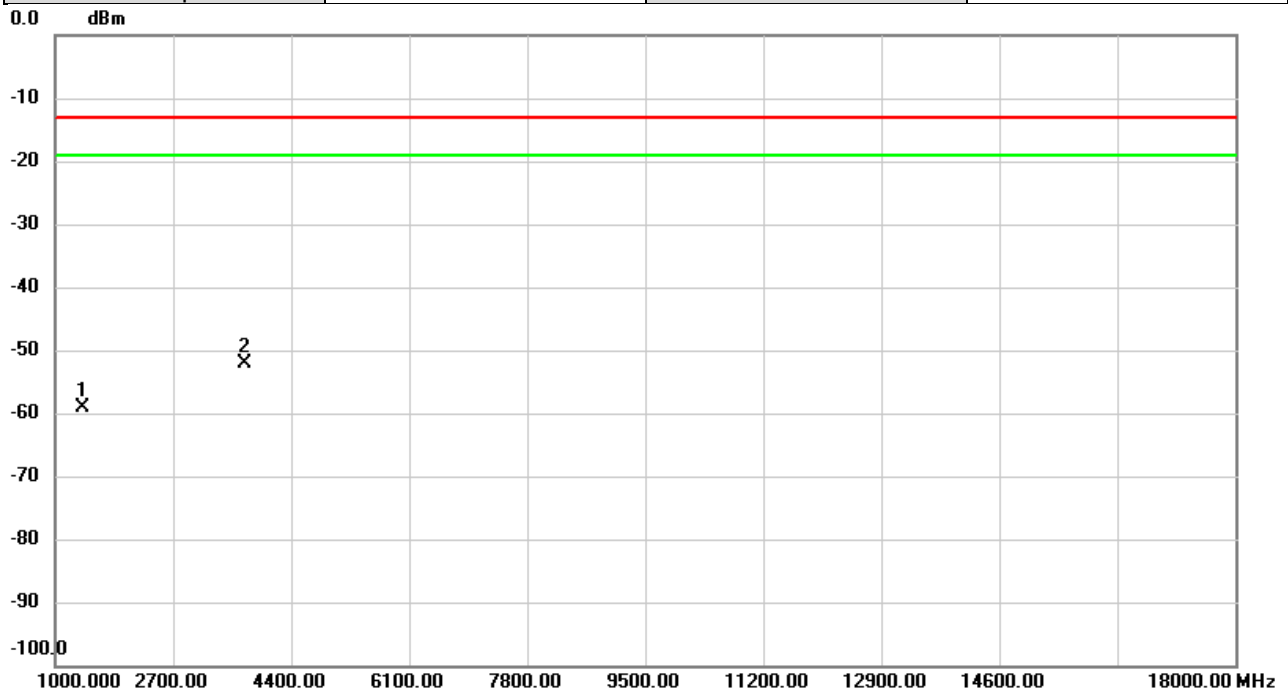


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1406.000	-63.49	4.48	-59.01	-13.00	-46.01	peak	
2	*	3742.000	-63.35	11.13	-52.22	-13.00	-39.22	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

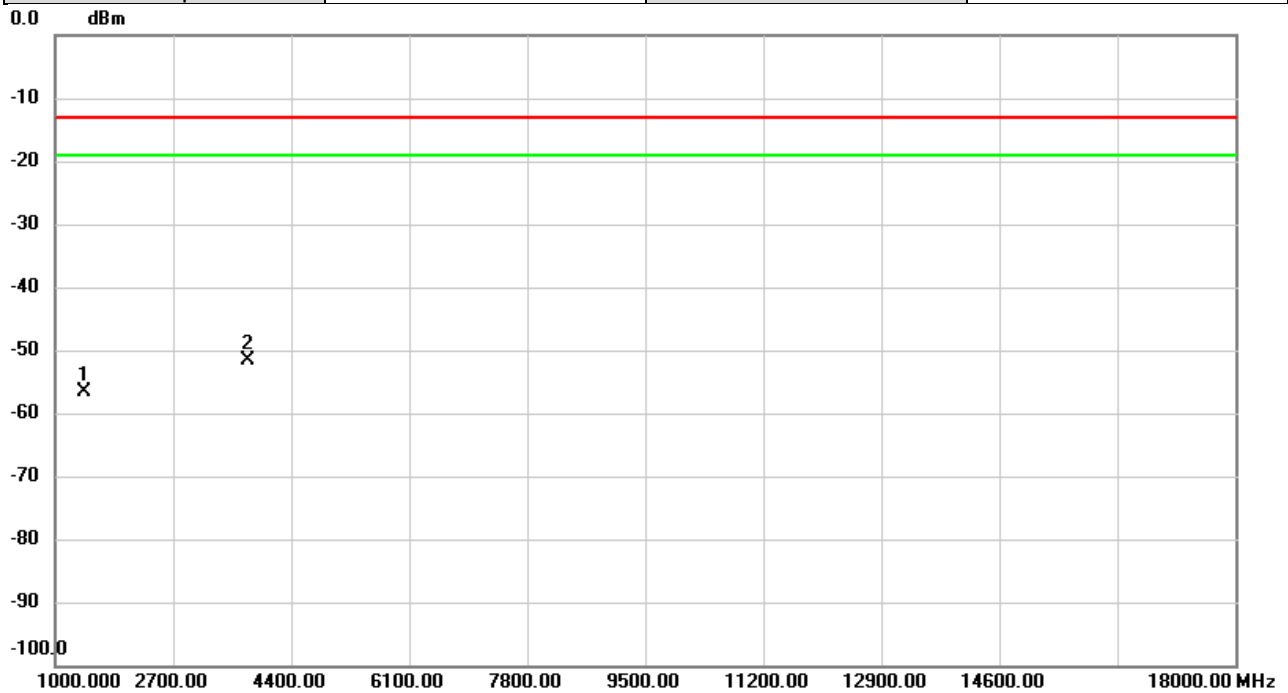


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-61.57	4.89	-56.68	-13.00	-43.68	peak	
2	*	3782.000	-63.32	11.61	-51.71	-13.00	-38.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

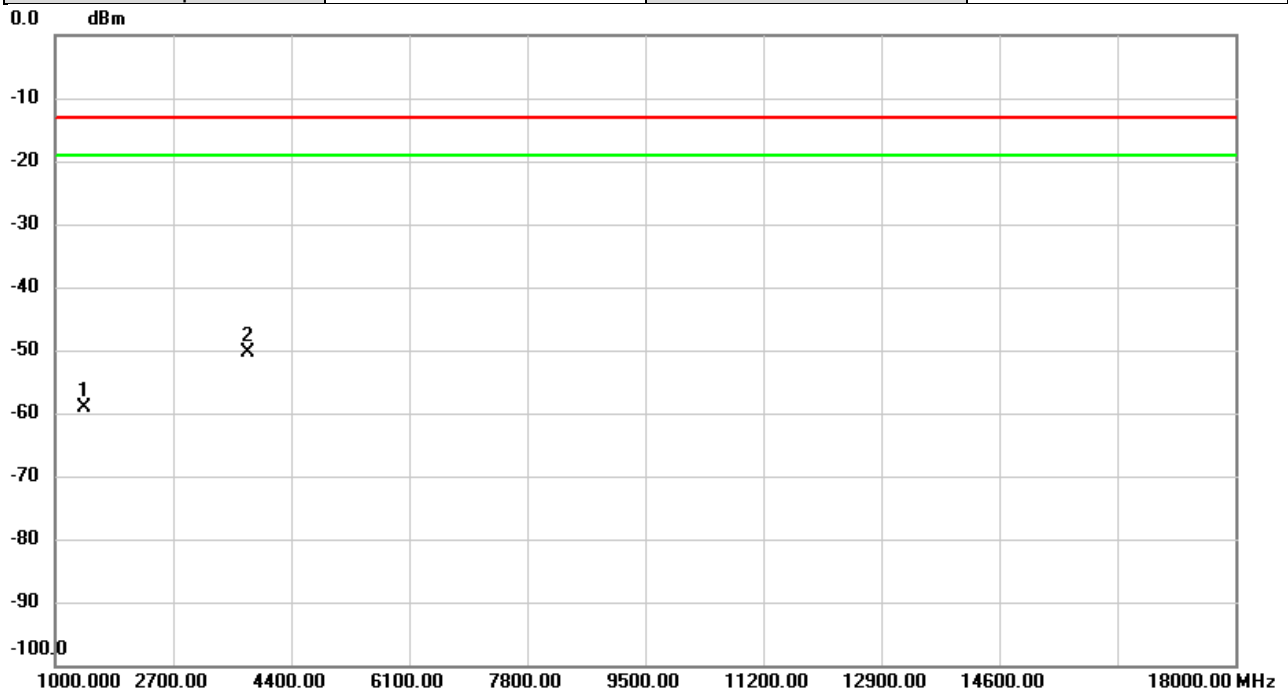


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1413.000	-63.61	4.45	-59.16	-13.00	-46.16	peak	
2	*	3782.000	-61.72	11.42	-50.30	-13.00	-37.30	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

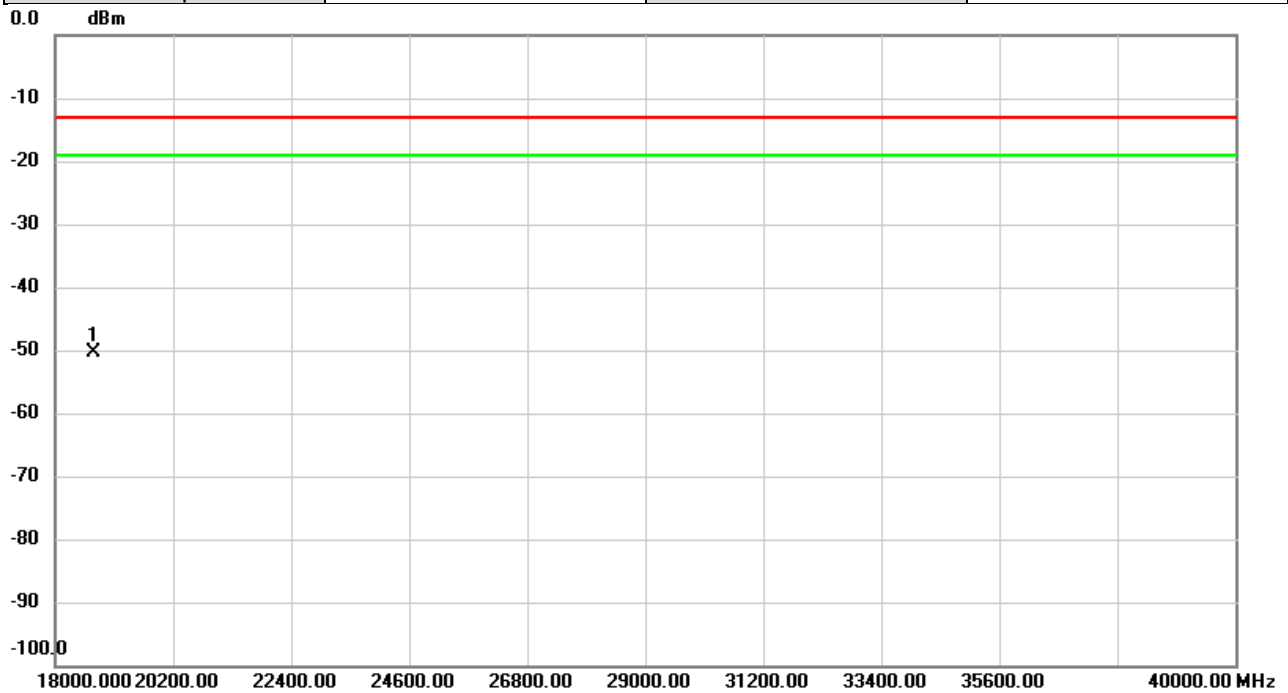


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-52.98	2.54	-50.44	-13.00	-37.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-12A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

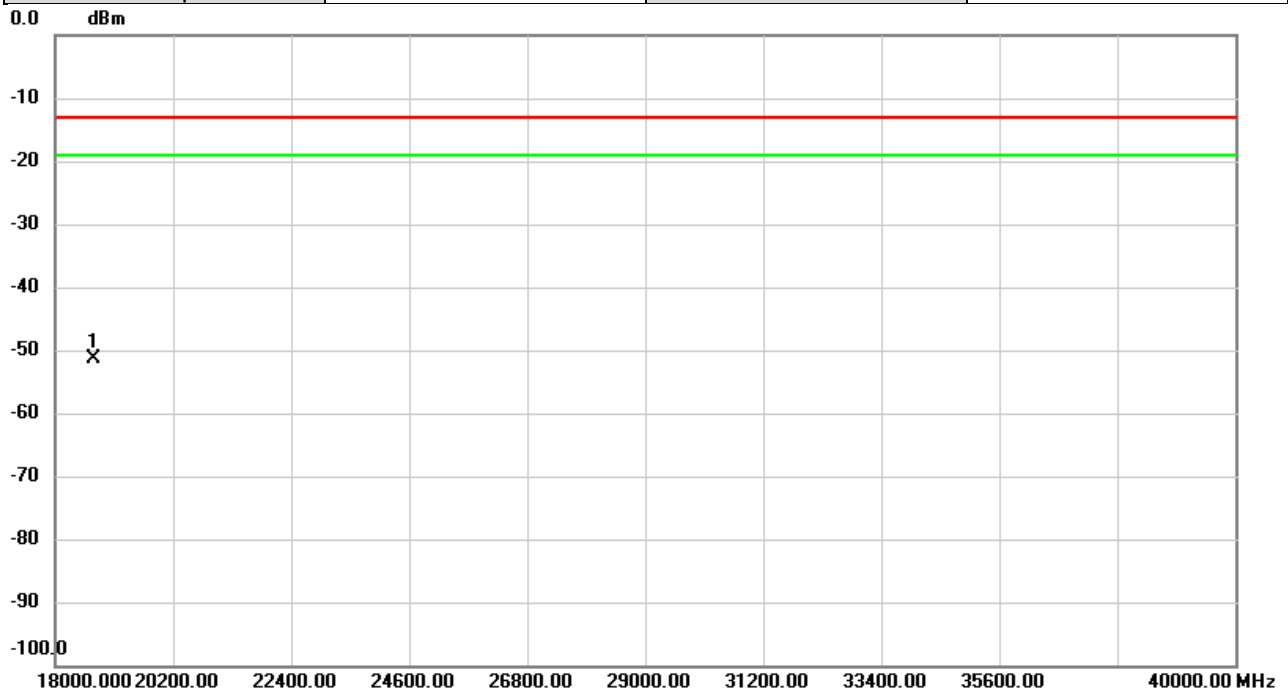


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-53.02	1.56	-51.46	-13.00	-38.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

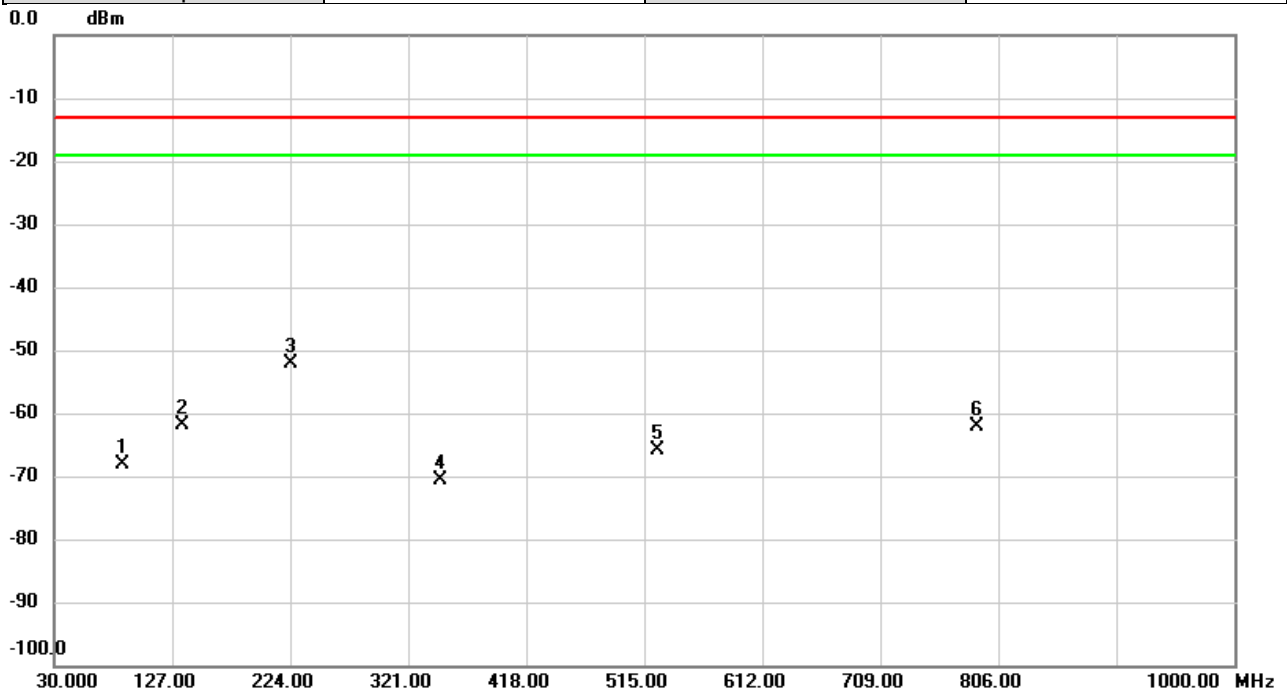


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		85.6456	-64.58	-3.63	-68.21	-13.00	-55.21	peak	
2		134.8892	-59.42	-2.34	-61.76	-13.00	-48.76	peak	
3	*	224.5173	-50.95	-1.24	-52.19	-13.00	-39.19	peak	
4		347.1900	-69.89	-0.77	-70.66	-13.00	-57.66	peak	
5		525.5082	-69.52	3.63	-65.89	-13.00	-52.89	peak	
6		788.2490	-68.14	5.99	-62.15	-13.00	-49.15	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

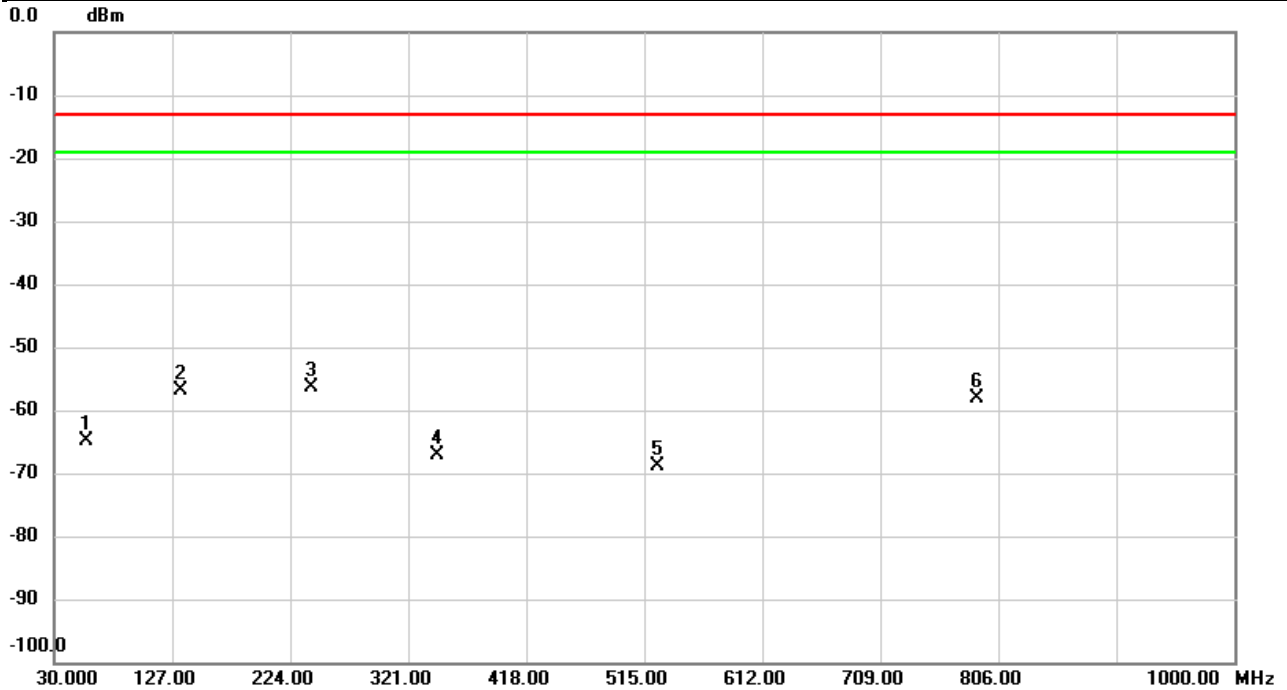


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		56.6103	-64.13	-0.74	-64.87	-13.00	-51.87	peak	
2		134.1780	-52.81	-4.04	-56.85	-13.00	-43.85	peak	
3	*	241.9773	-50.26	-6.05	-56.31	-13.00	-43.31	peak	
4		345.1206	-66.32	-0.76	-67.08	-13.00	-54.08	peak	
5		525.4760	-70.11	1.13	-68.98	-13.00	-55.98	peak	
6		788.2490	-64.29	6.06	-58.23	-13.00	-45.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

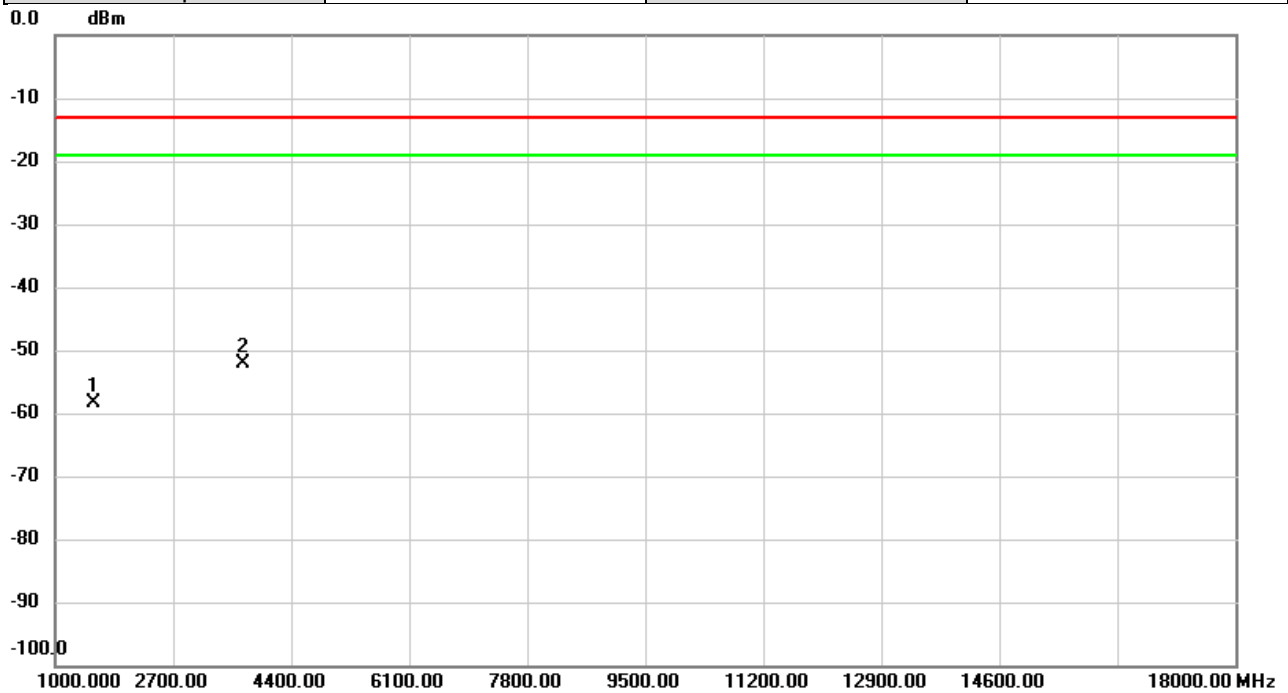


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.99	4.56	-58.43	-13.00	-45.43	peak	
2	*	3702.000	-63.96	11.72	-52.24	-13.00	-39.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

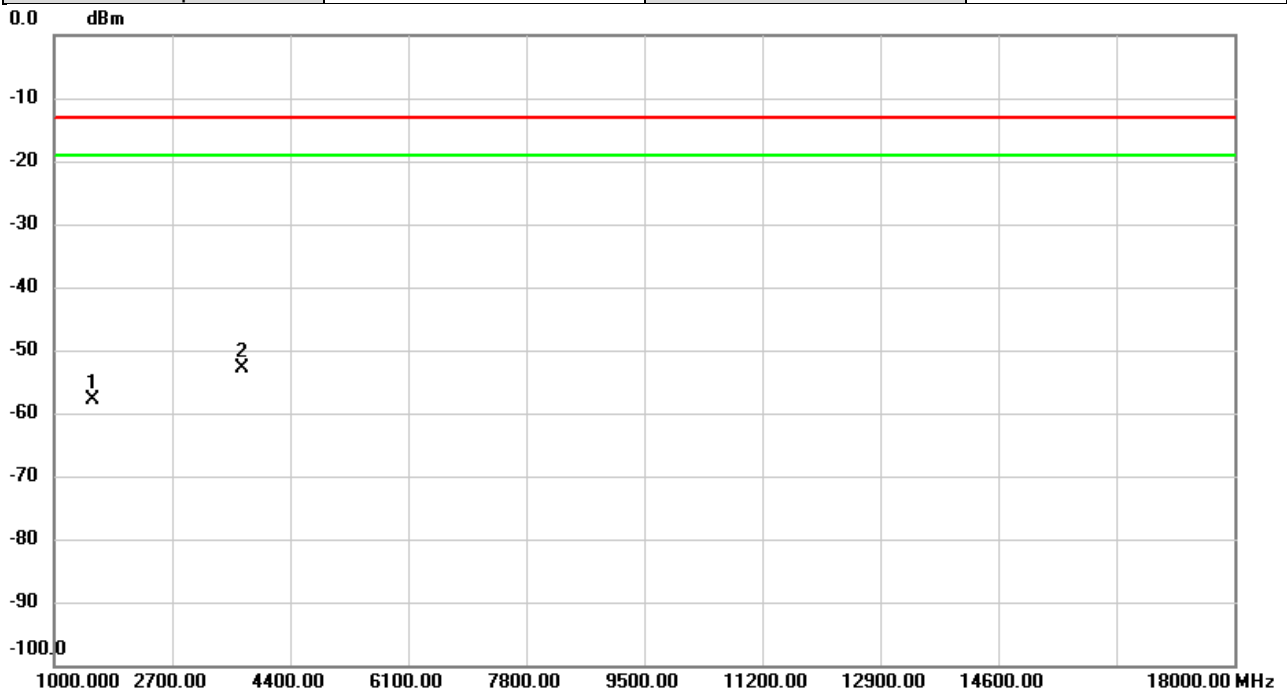


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1554.000	-62.27	4.39	-57.88	-13.00	-44.88	peak	
2	*	3702.000	-63.96	11.13	-52.83	-13.00	-39.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

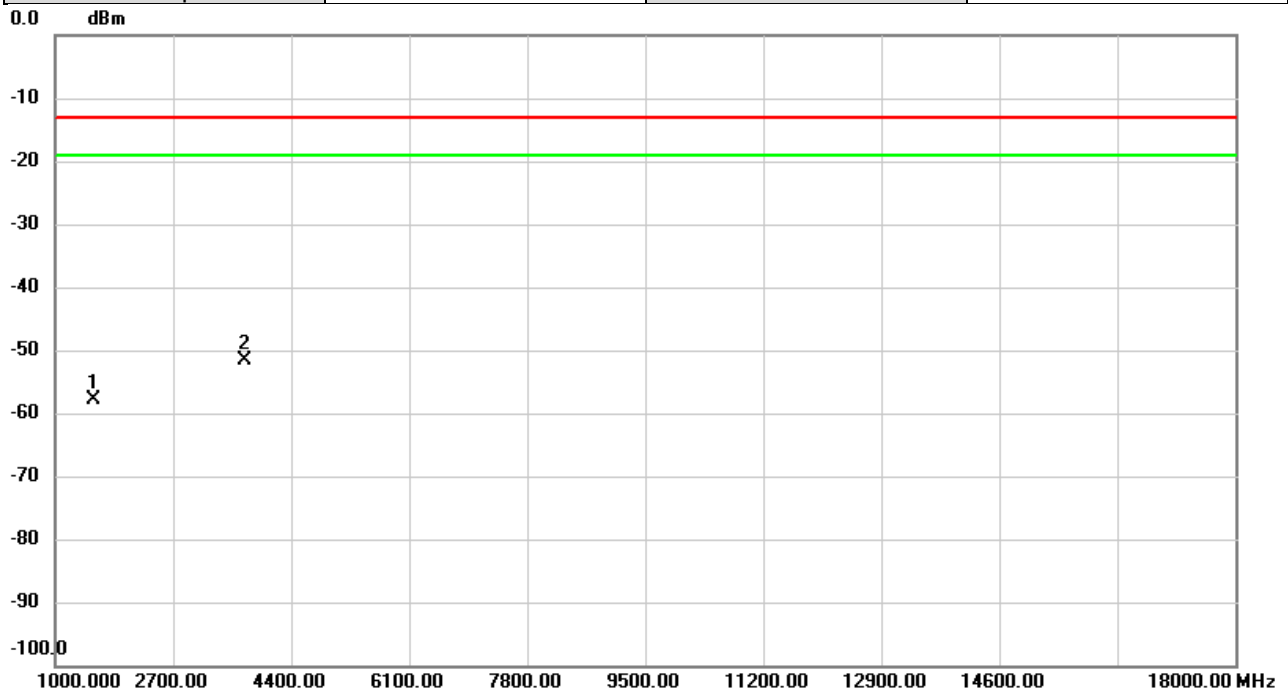


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-62.44	4.60	-57.84	-13.00	-44.84	peak	
2	*	3742.000	-63.21	11.57	-51.64	-13.00	-38.64	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-13A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

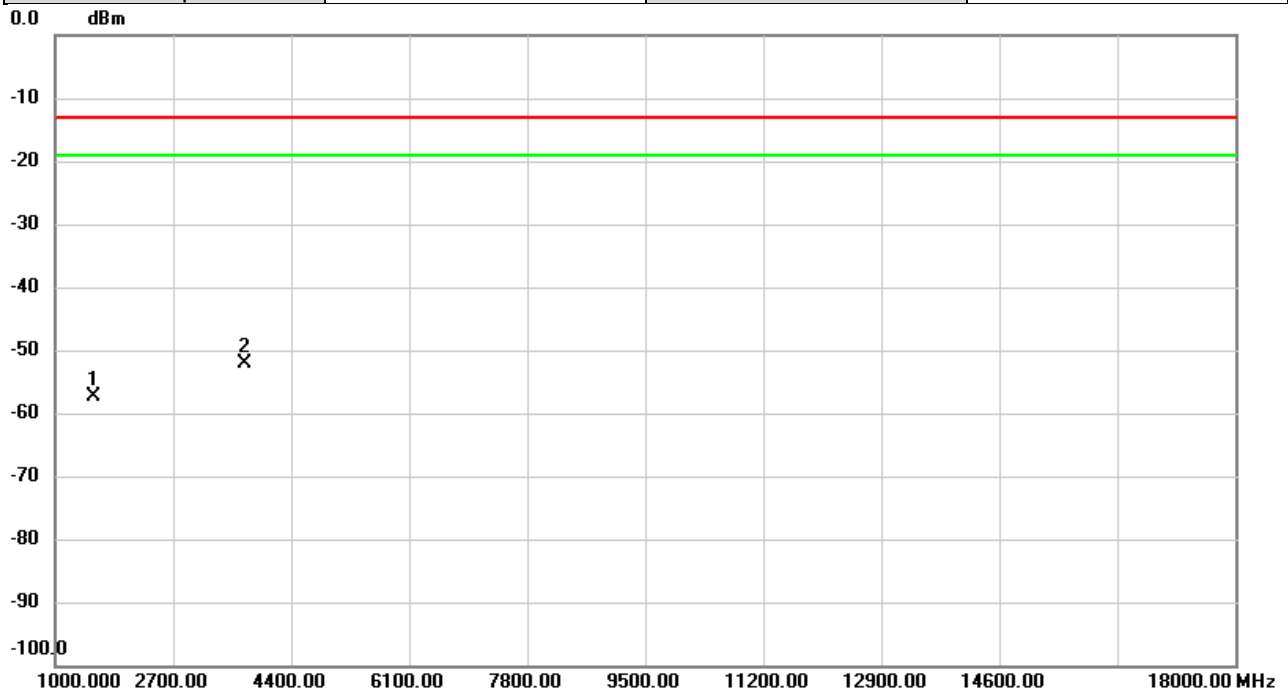


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1559.000	-61.81	4.44	-57.37	-13.00	-44.37	peak	
2	*	3742.000	-63.26	11.13	-52.13	-13.00	-39.13	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

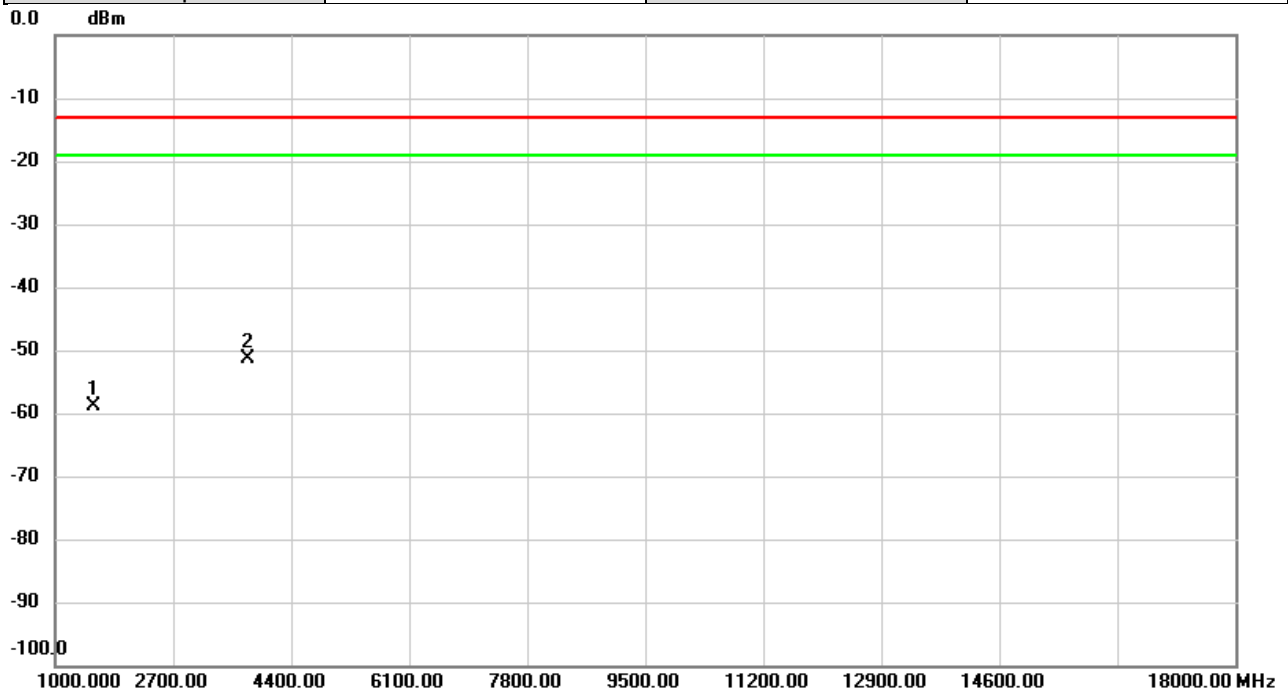


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-63.59	4.64	-58.95	-13.00	-45.95	peak	
2	*	3782.000	-63.06	11.61	-51.45	-13.00	-38.45	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

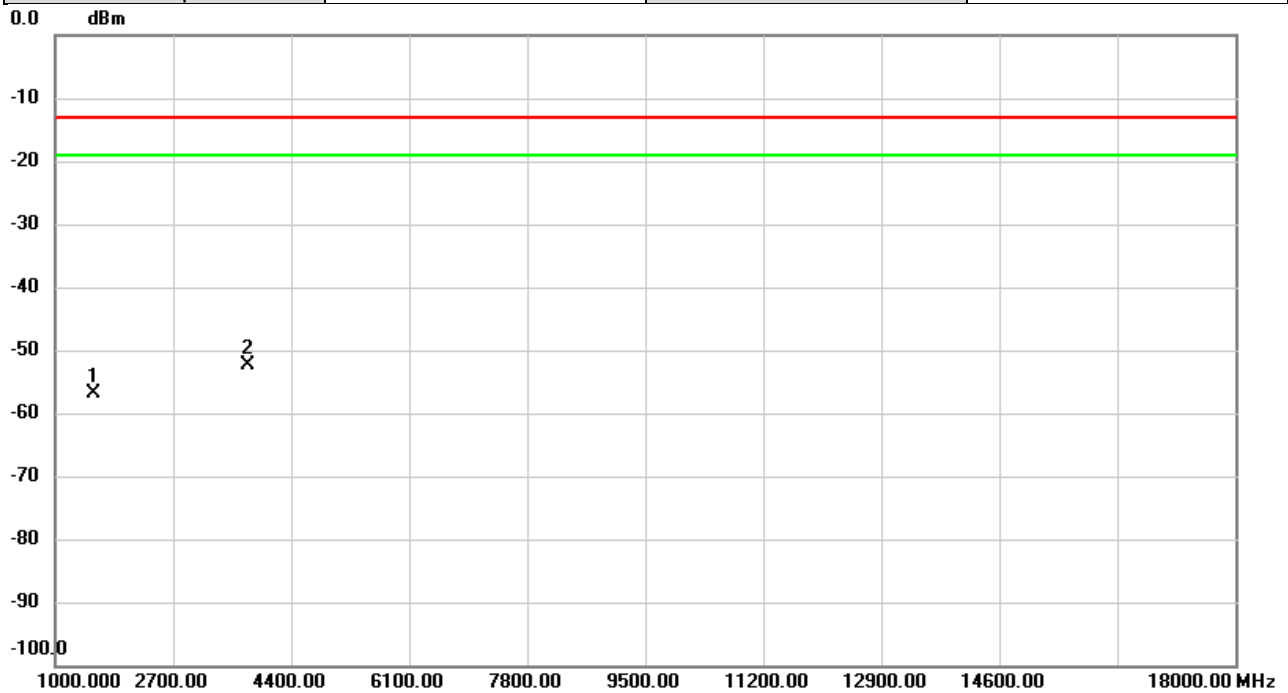


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1564.000	-61.31	4.49	-56.82	-13.00	-43.82	peak	
2	*	3782.000	-63.69	11.42	-52.27	-13.00	-39.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

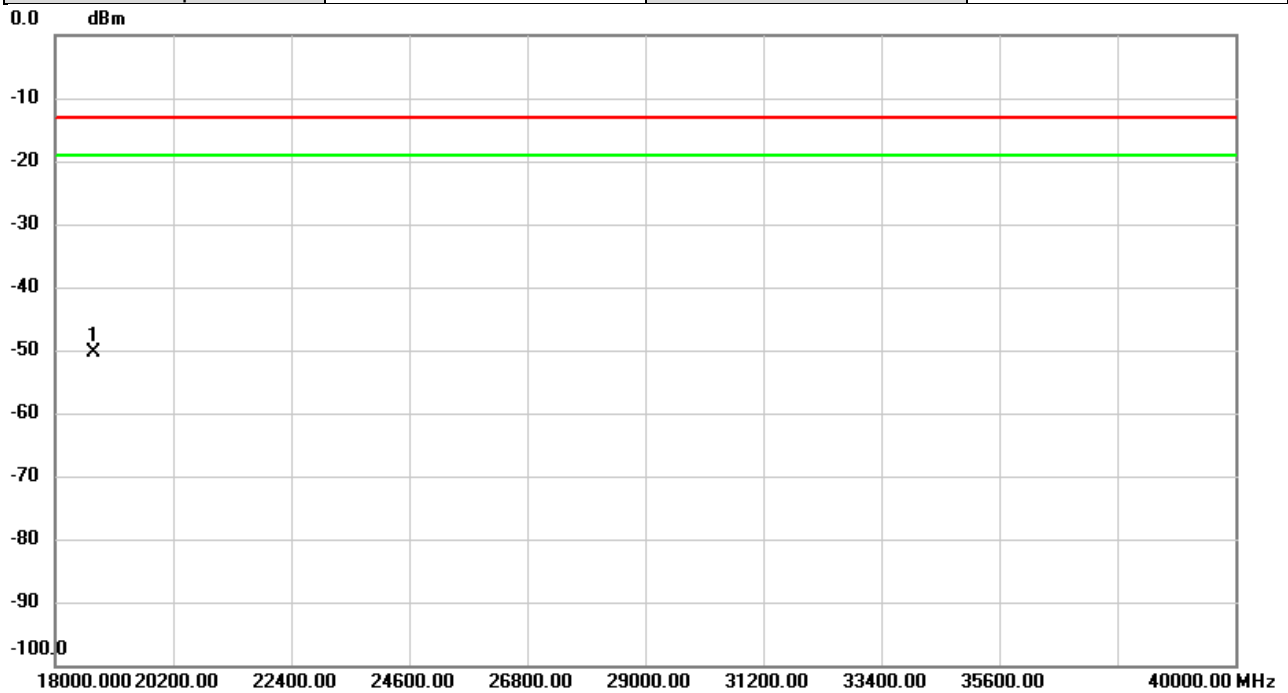


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-52.84	2.54	-50.30	-13.00	-37.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-13A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

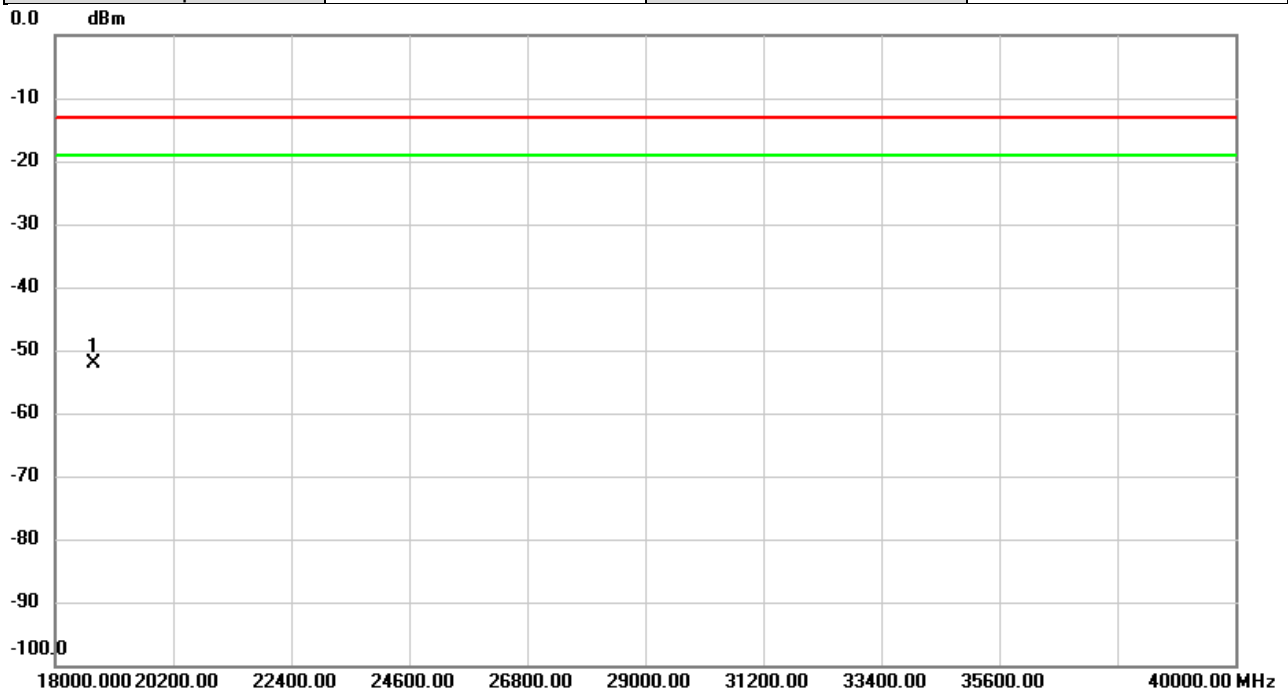


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18710.00	-53.65	1.56	-52.09	-13.00	-39.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

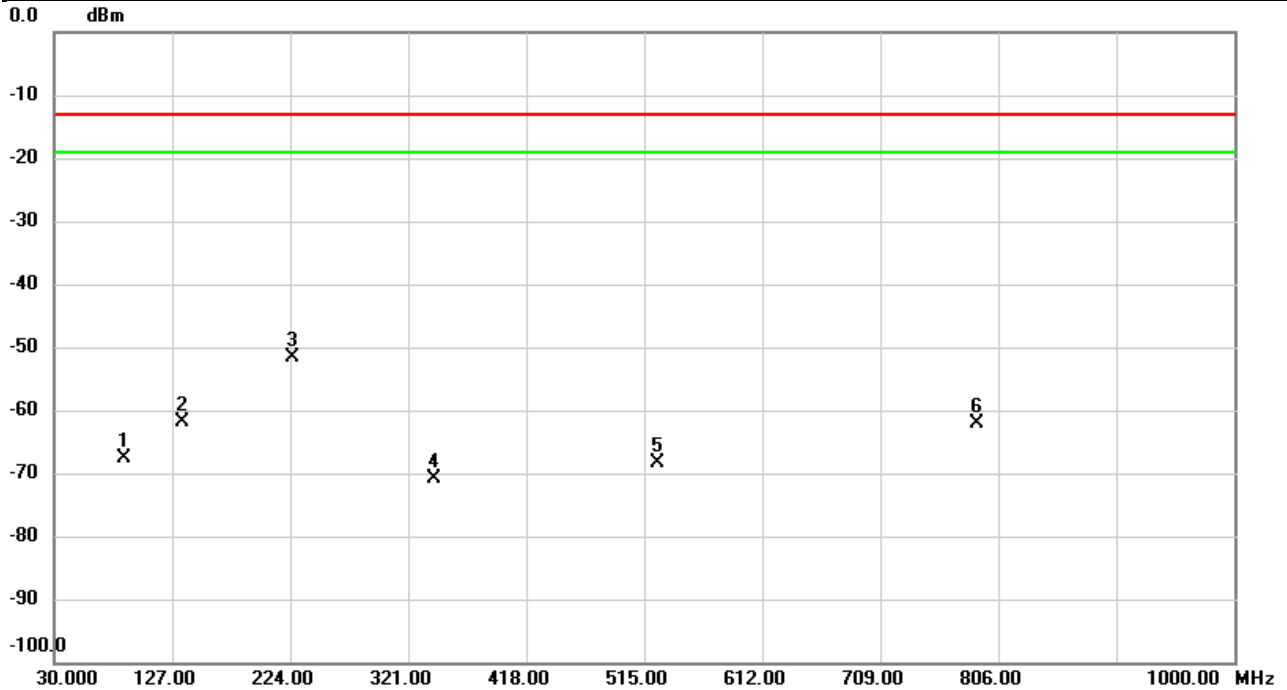


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		86.9390	-64.12	-3.55	-67.67	-13.00	-54.67	peak	
2		135.0510	-59.65	-2.30	-61.95	-13.00	-48.95	peak	
3	*	225.7460	-50.61	-1.11	-51.72	-13.00	-38.72	peak	
4		342.7280	-70.05	-0.81	-70.86	-13.00	-57.86	peak	
5		525.5406	-71.93	3.63	-68.30	-13.00	-55.30	peak	
6		788.2490	-68.09	5.99	-62.10	-13.00	-49.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

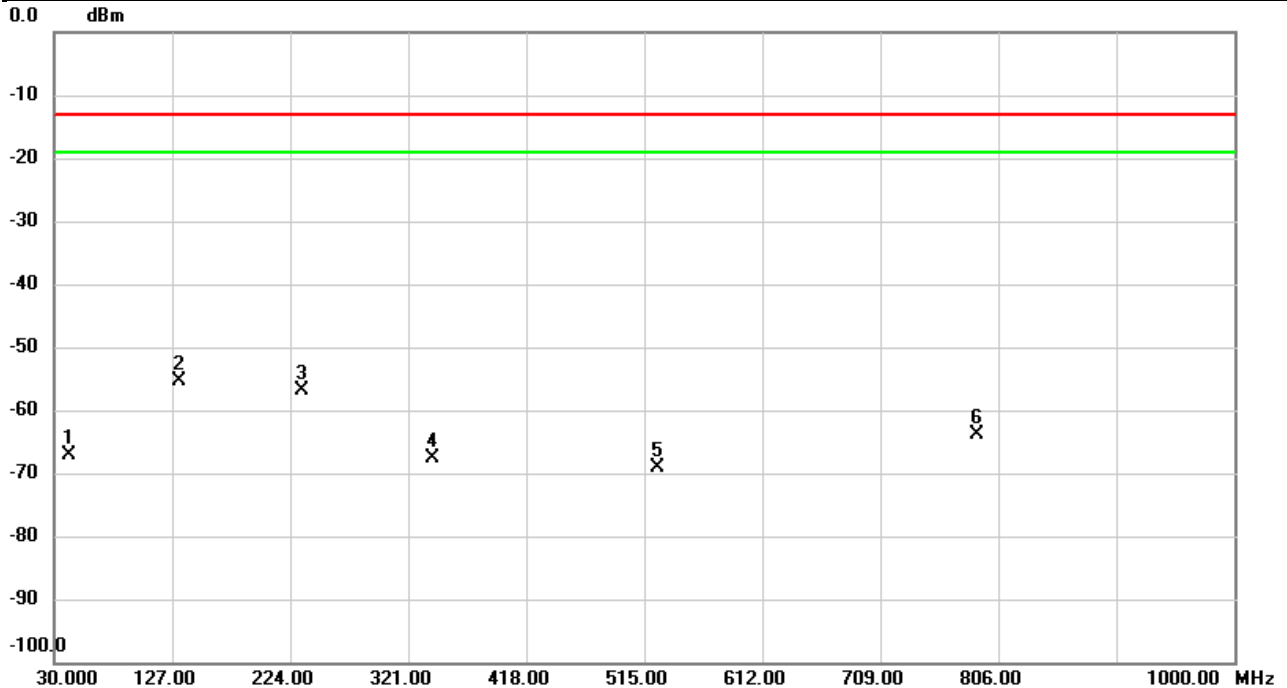


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		41.8340	-70.92	3.84	-67.08	-13.00	-54.08	peak	
2	*	132.9816	-51.22	-4.15	-55.37	-13.00	-42.37	peak	
3		233.9910	-51.02	-5.92	-56.94	-13.00	-43.94	peak	
4		341.6610	-66.55	-1.01	-67.56	-13.00	-54.56	peak	
5		525.5082	-70.33	1.13	-69.20	-13.00	-56.20	peak	
6		788.2490	-69.87	6.06	-63.81	-13.00	-50.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

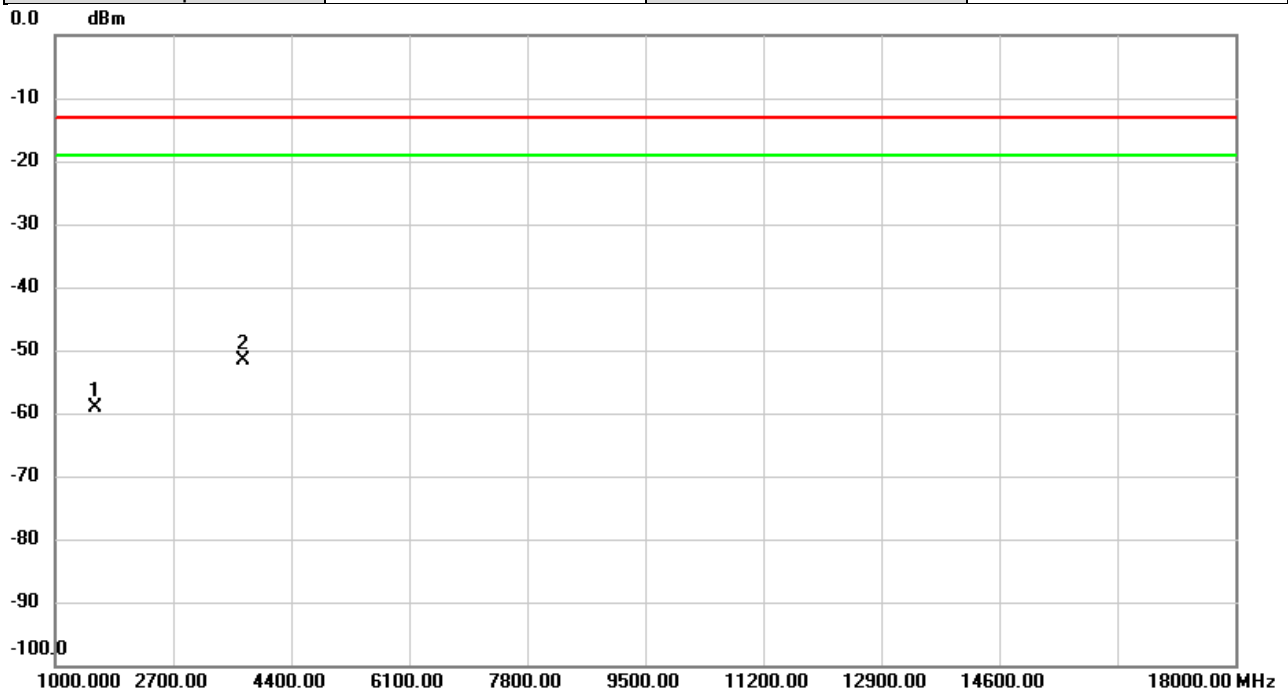


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1576.000	-63.75	4.73	-59.02	-13.00	-46.02	peak	
2	*	3702.000	-63.31	11.72	-51.59	-13.00	-38.59	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

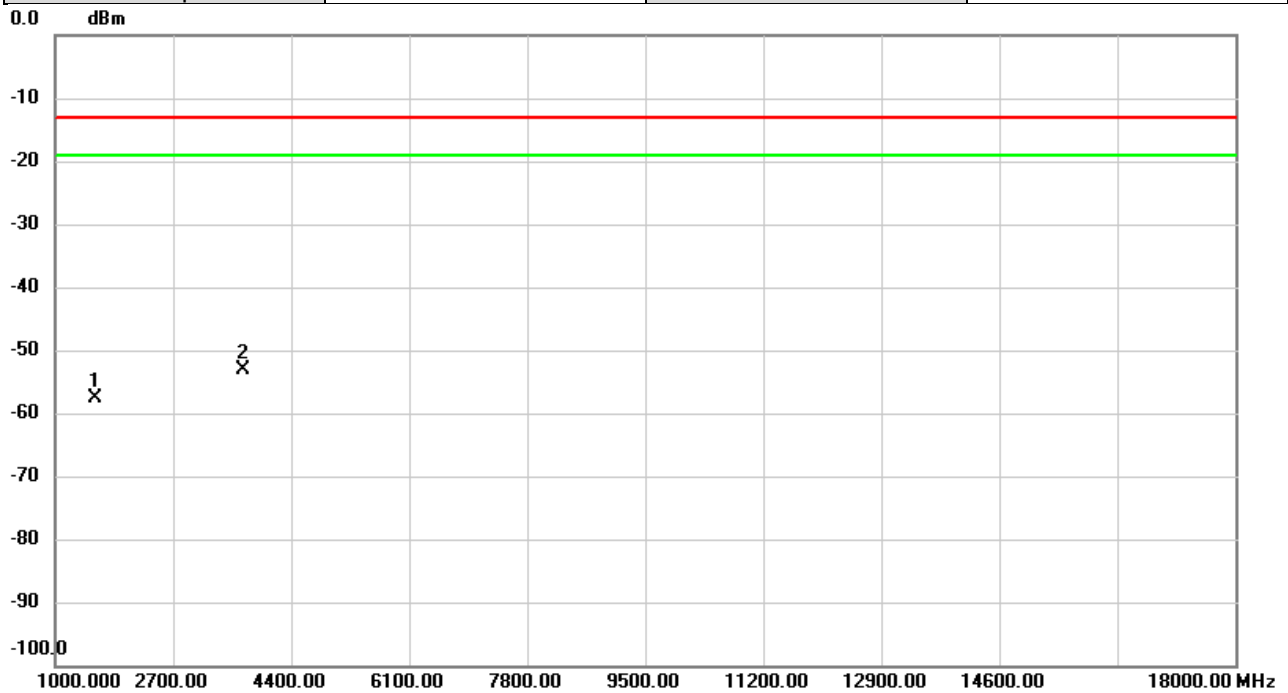


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1576.000	-62.27	4.61	-57.66	-13.00	-44.66	peak	
2	*	3702.000	-64.15	11.13	-53.02	-13.00	-40.02	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

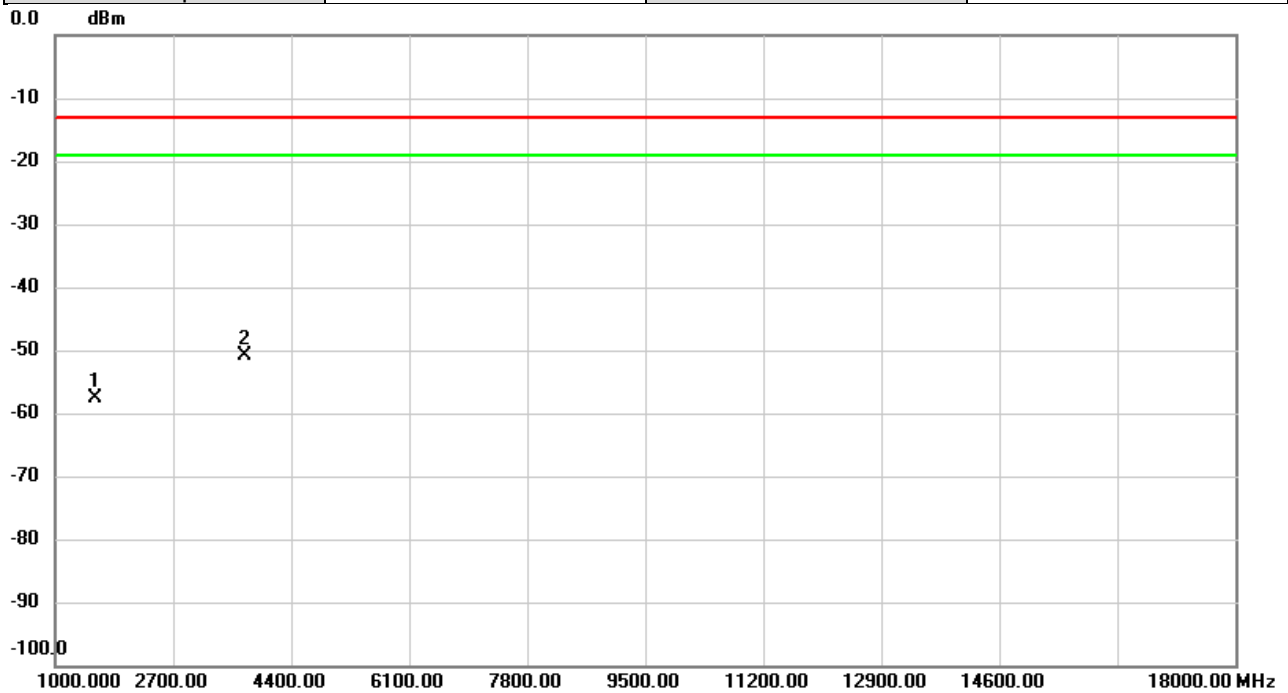


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1577.000	-62.27	4.74	-57.53	-13.00	-44.53	peak	
2	*	3742.000	-62.52	11.57	-50.95	-13.00	-37.95	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

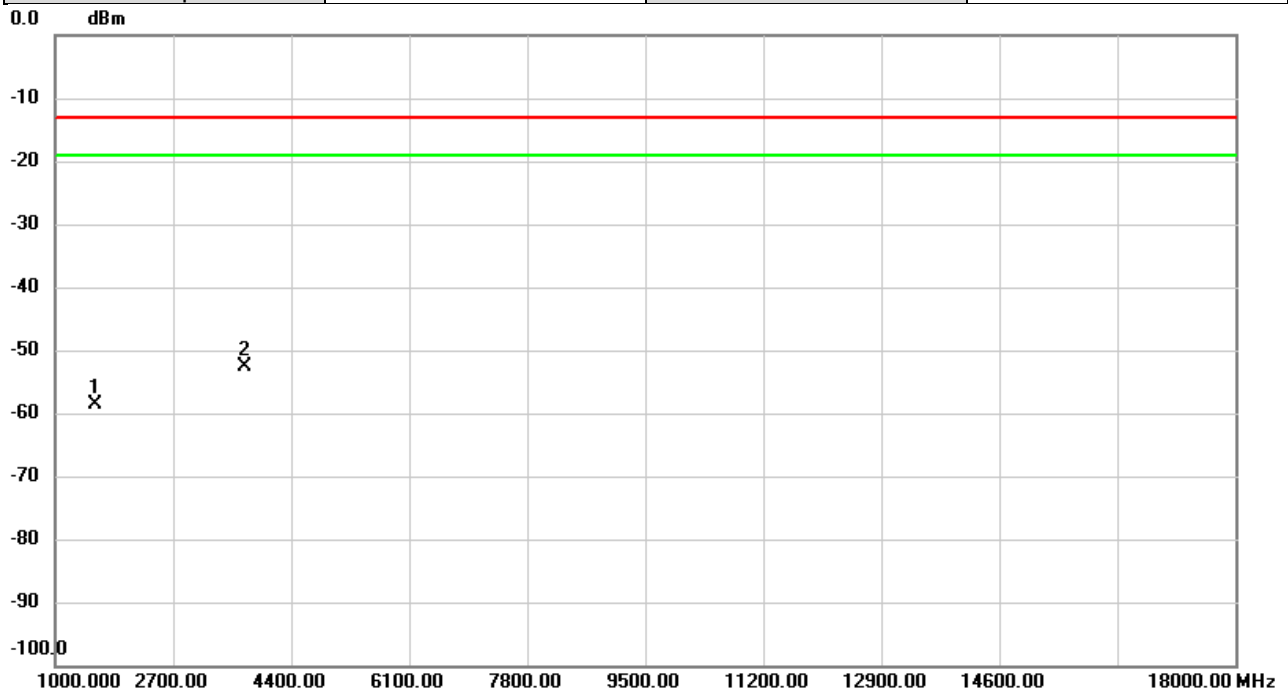


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1577.000	-63.14	4.62	-58.52	-13.00	-45.52	peak	
2	*	3742.000	-63.80	11.13	-52.67	-13.00	-39.67	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

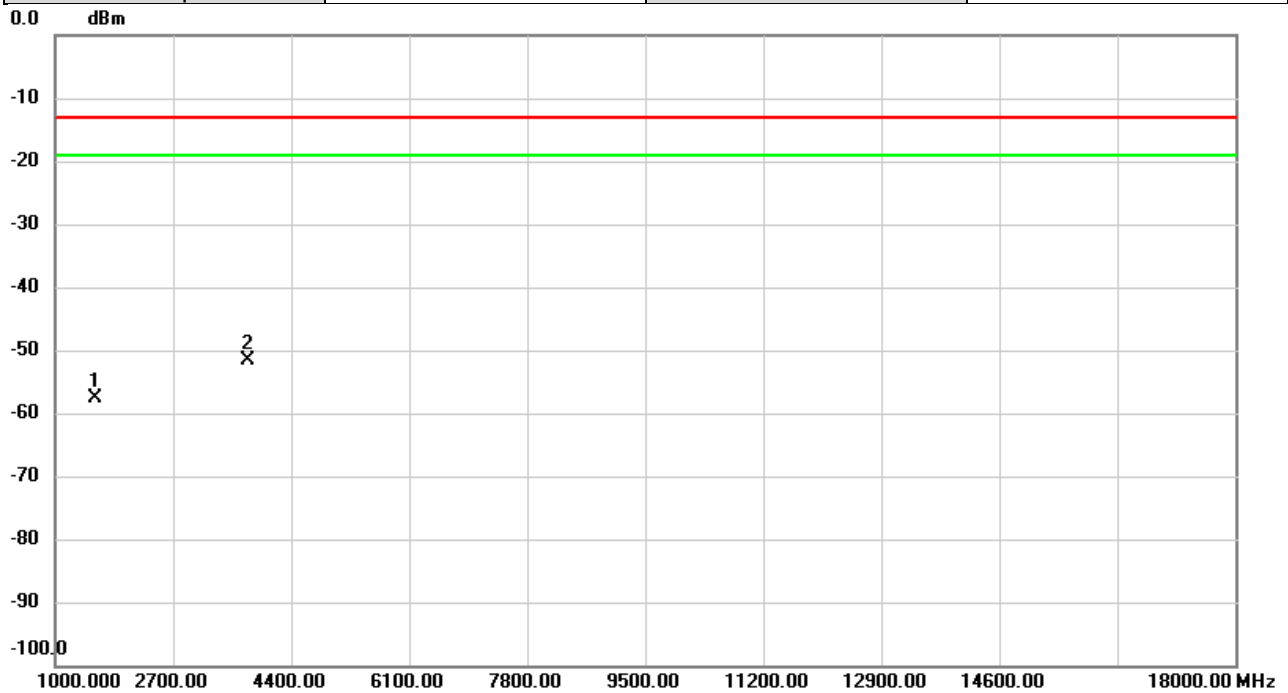


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1586.000	-62.44	4.81	-57.63	-13.00	-44.63	peak	
2	*	3782.000	-63.29	11.61	-51.68	-13.00	-38.68	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

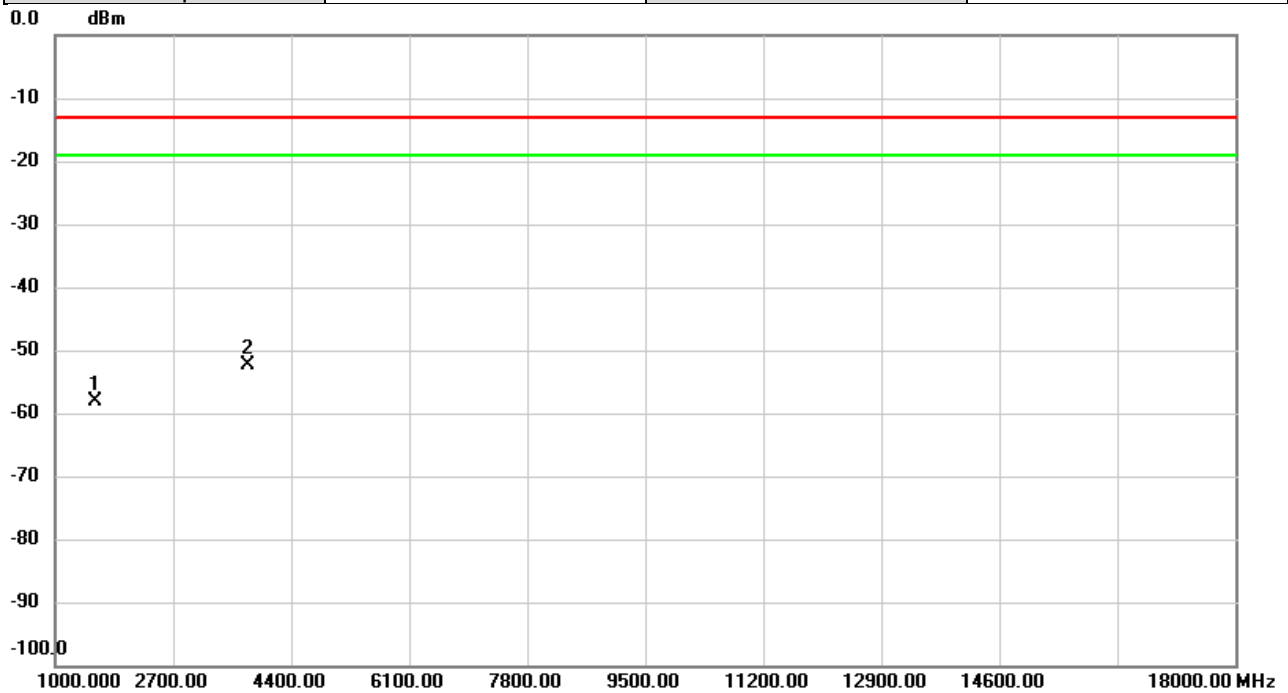


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1586.000	-62.82	4.71	-58.11	-13.00	-45.11	peak	
2	*	3782.000	-63.79	11.42	-52.37	-13.00	-39.37	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

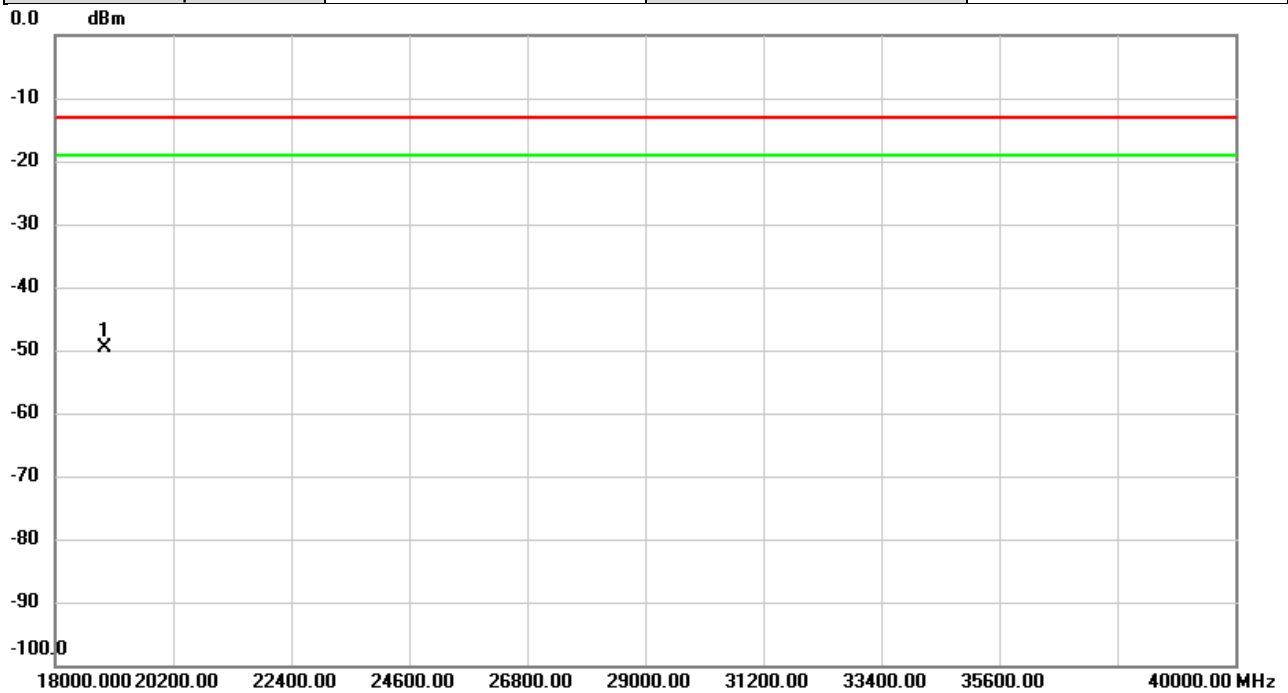


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18910.00	-52.17	2.46	-49.71	-13.00	-36.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-14A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

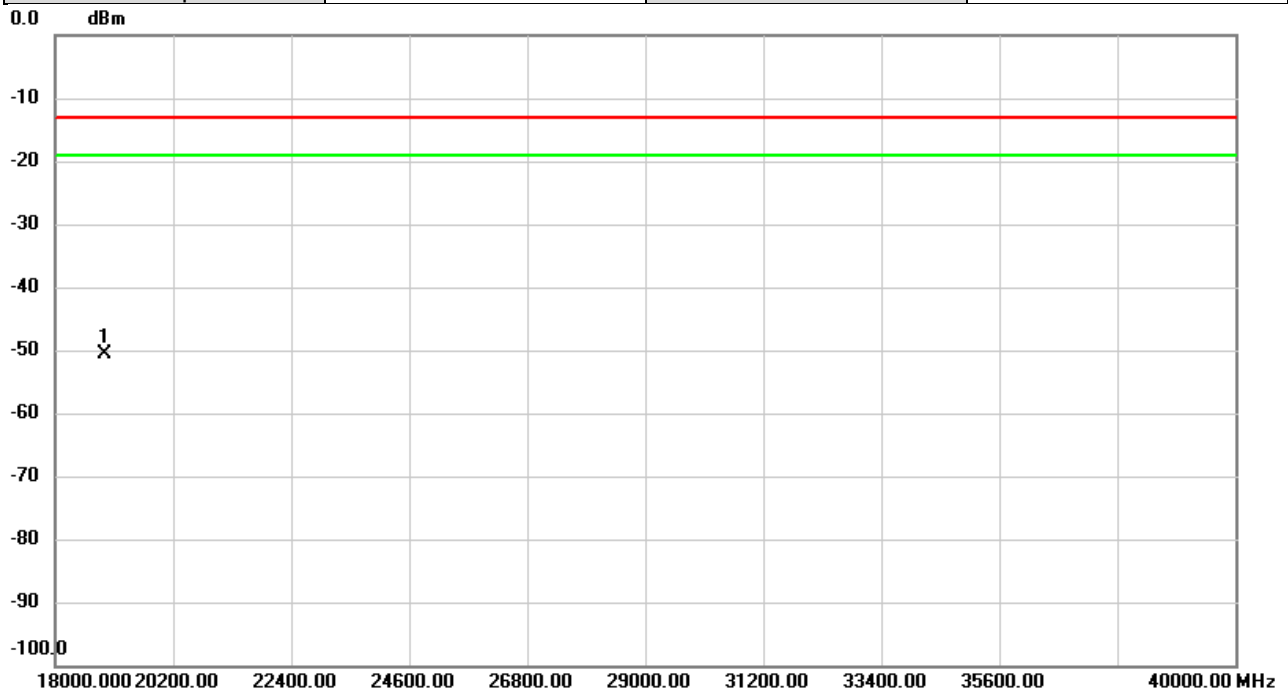


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18910.00	-51.99	1.44	-50.55	-13.00	-37.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

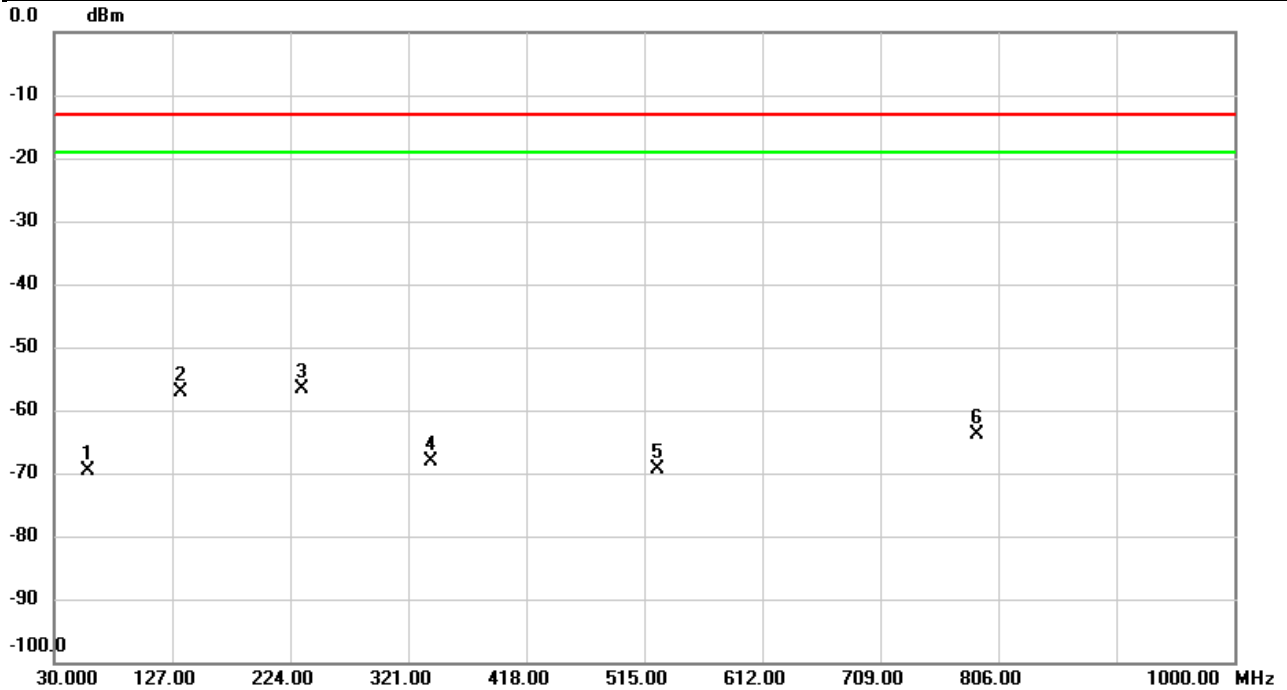


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.2893	-68.75	-0.98	-69.73	-13.00	-56.73	peak	
2		133.6930	-52.92	-4.09	-57.01	-13.00	-44.01	peak	
3	*	233.7970	-50.72	-5.91	-56.63	-13.00	-43.63	peak	
4		339.5270	-66.85	-1.16	-68.01	-13.00	-55.01	peak	
5		525.4760	-70.61	1.13	-69.48	-13.00	-56.48	peak	
6		788.2813	-69.95	6.06	-63.89	-13.00	-50.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

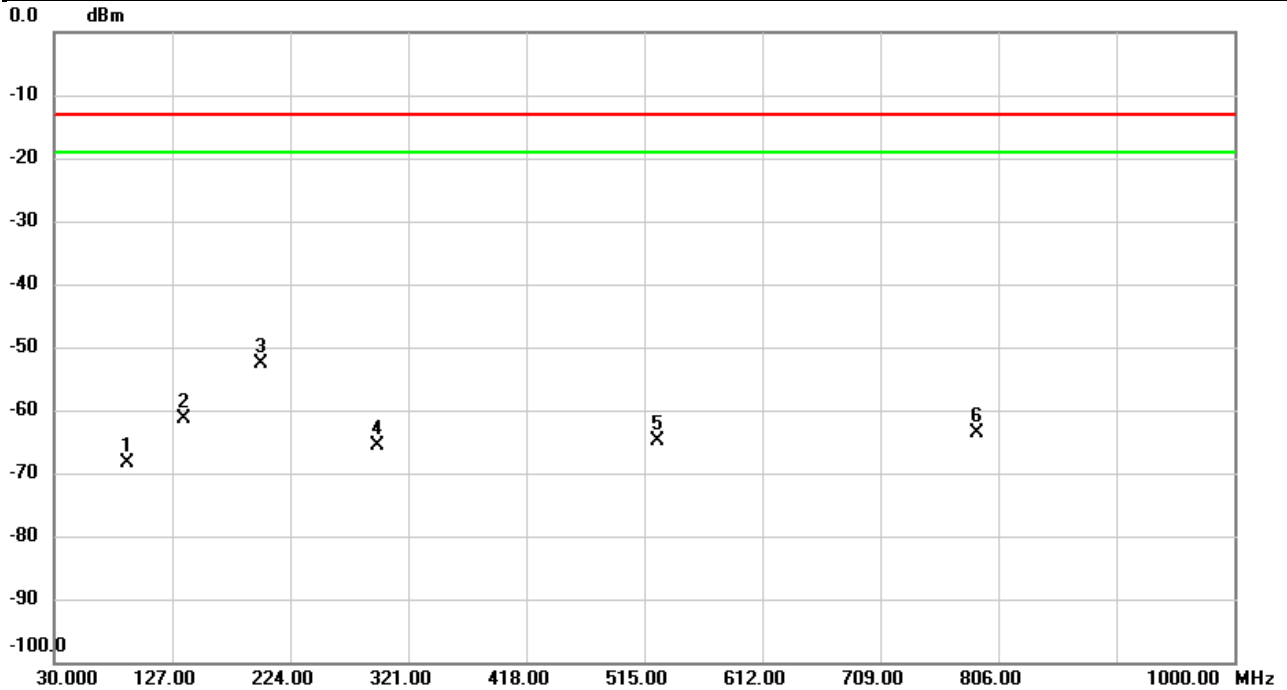


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		89.6873	-64.97	-3.37	-68.34	-13.00	-55.34	peak	
2		136.1180	-59.31	-2.07	-61.38	-13.00	-48.38	peak	
3	*	199.5560	-51.39	-1.20	-52.59	-13.00	-39.59	peak	
4		296.3297	-64.37	-1.20	-65.57	-13.00	-52.57	peak	
5		525.5082	-68.58	3.63	-64.95	-13.00	-51.95	peak	
6		788.2490	-69.52	5.99	-63.53	-13.00	-50.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Vertical
Temp	25°C	Hum.	58%

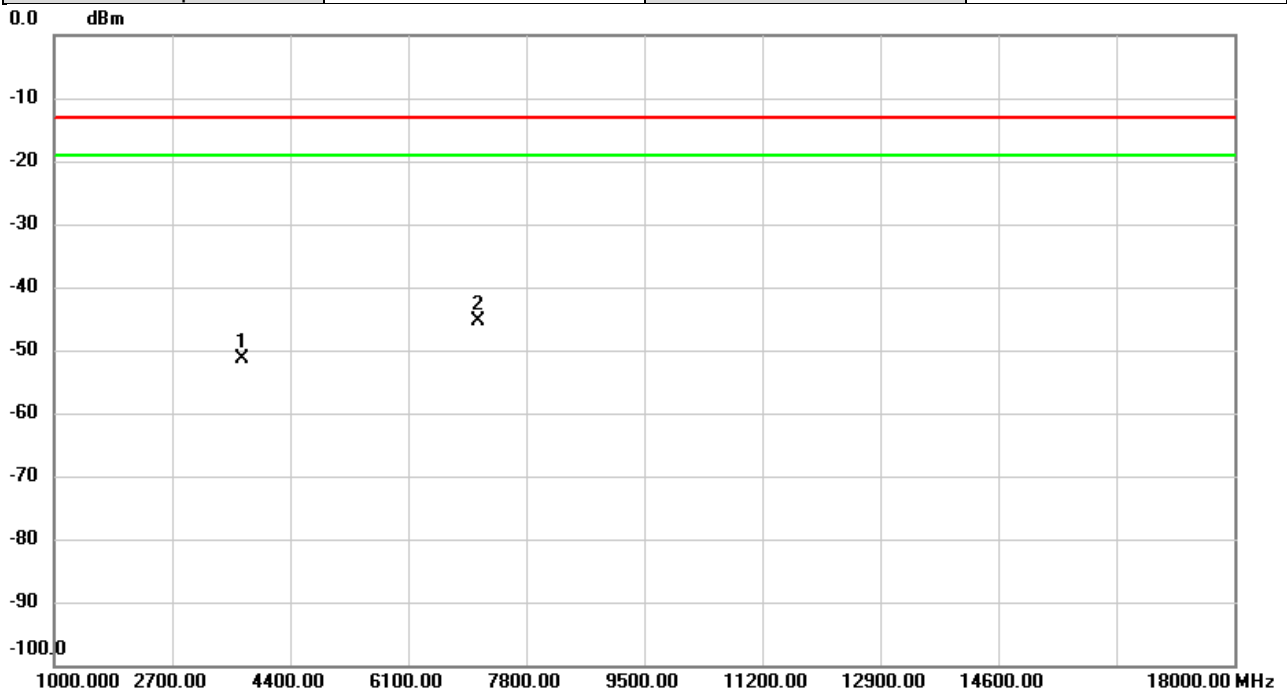


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3702.000	-63.13	11.72	-51.41	-13.00	-38.41	peak	
2	*	7102.000	-63.81	18.46	-45.35	-13.00	-32.35	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX Low CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

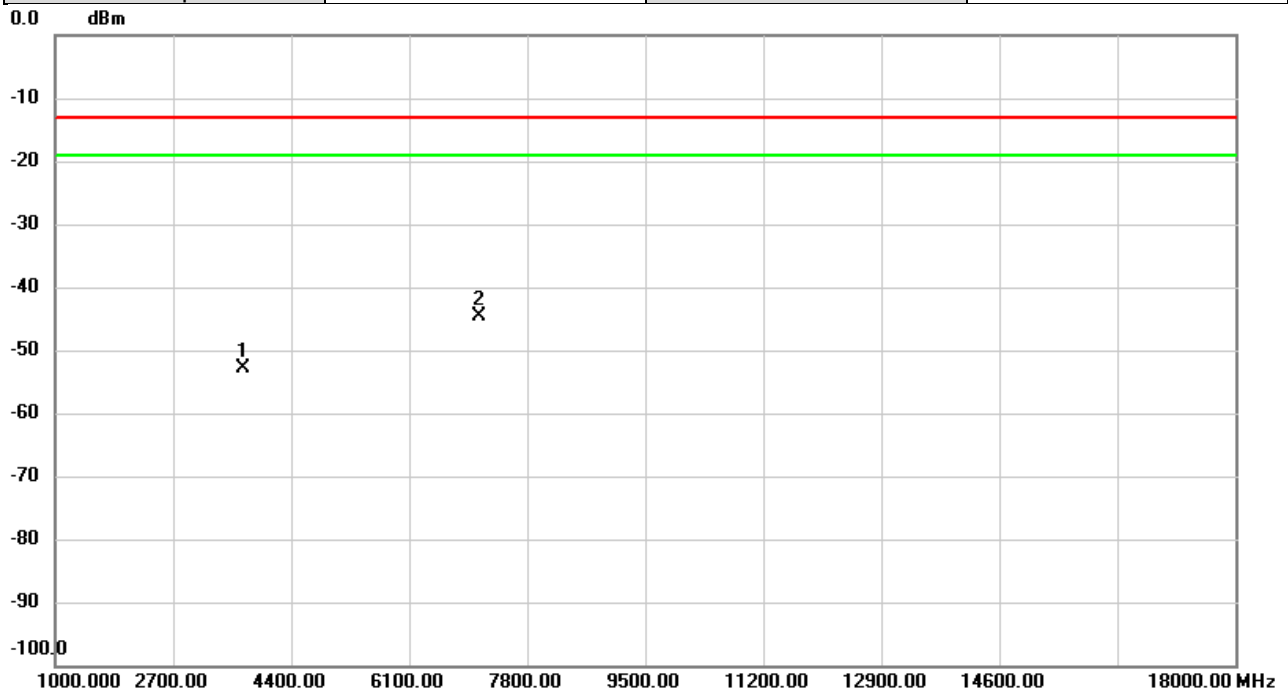


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3702.000	-63.91	11.13	-52.78	-13.00	-39.78	peak	
2	*	7102.000	-63.13	18.42	-44.71	-13.00	-31.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Vertical
Temp	25°C	Hum.	58%

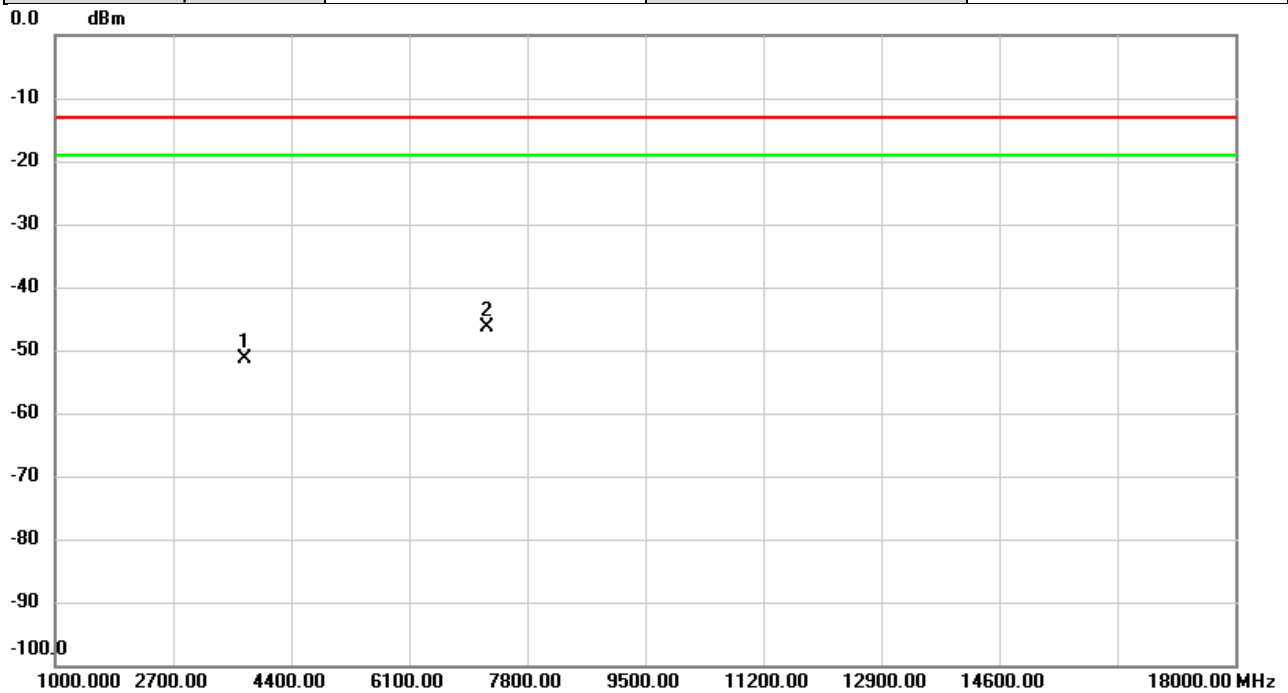


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3742.000	-62.88	11.57	-51.31	-13.00	-38.31	peak	
2	*	7232.000	-64.14	17.85	-46.29	-13.00	-33.29	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

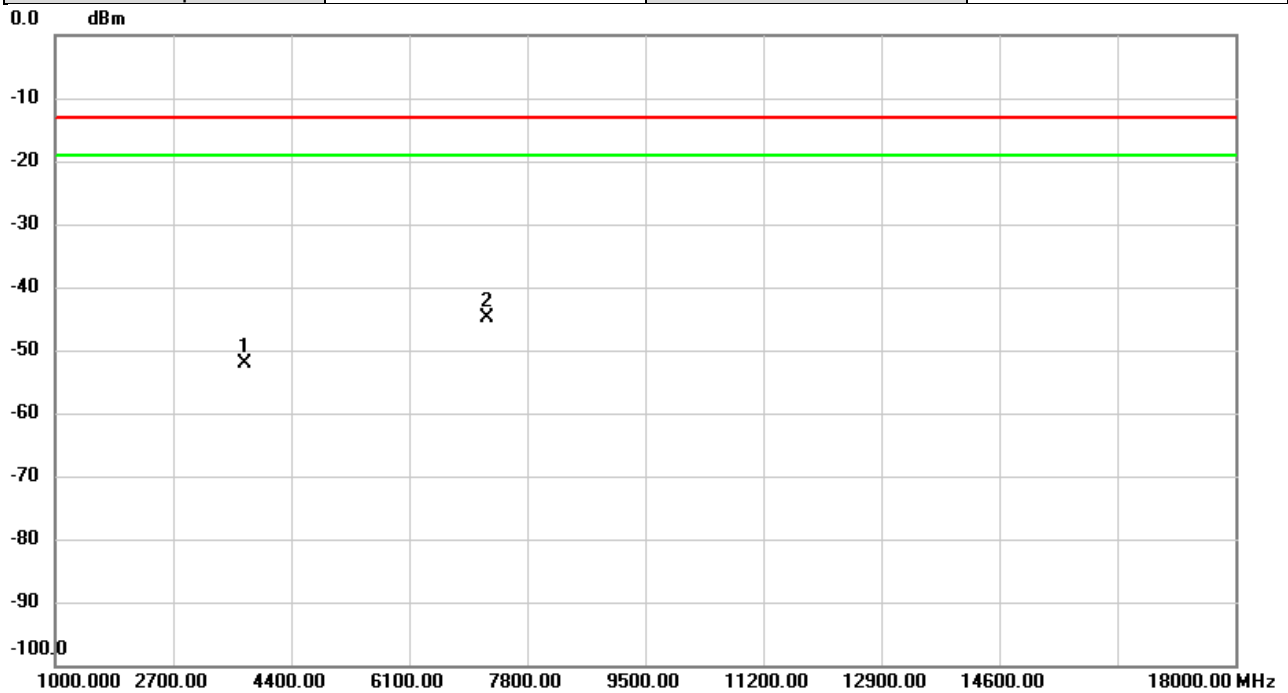


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3742.000	-63.23	11.13	-52.10	-13.00	-39.10	peak	
2	*	7232.000	-62.49	17.52	-44.97	-13.00	-31.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Vertical
Temp	25°C	Hum.	58%

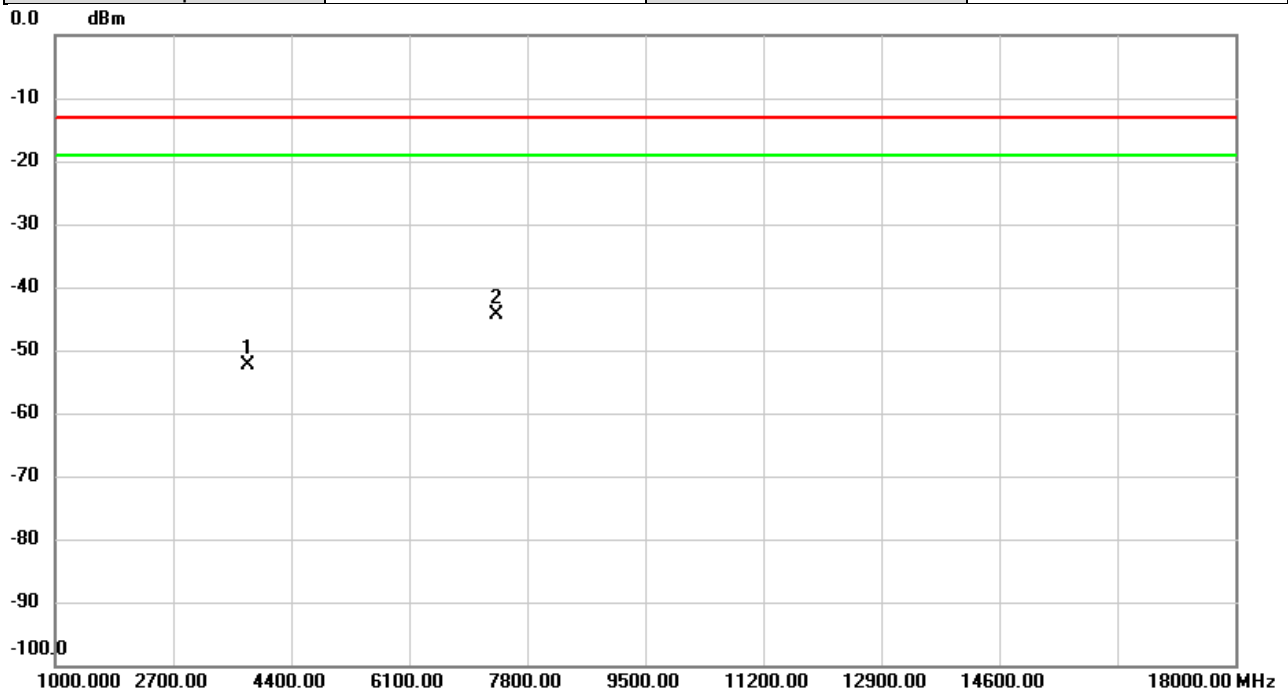


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3782.000	-64.10	11.61	-52.49	-13.00	-39.49	peak	
2	*	7362.000	-62.05	17.71	-44.34	-13.00	-31.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/6
Test Channel	TX High CH	Polarization	Horizontal
Temp	25°C	Hum.	58%

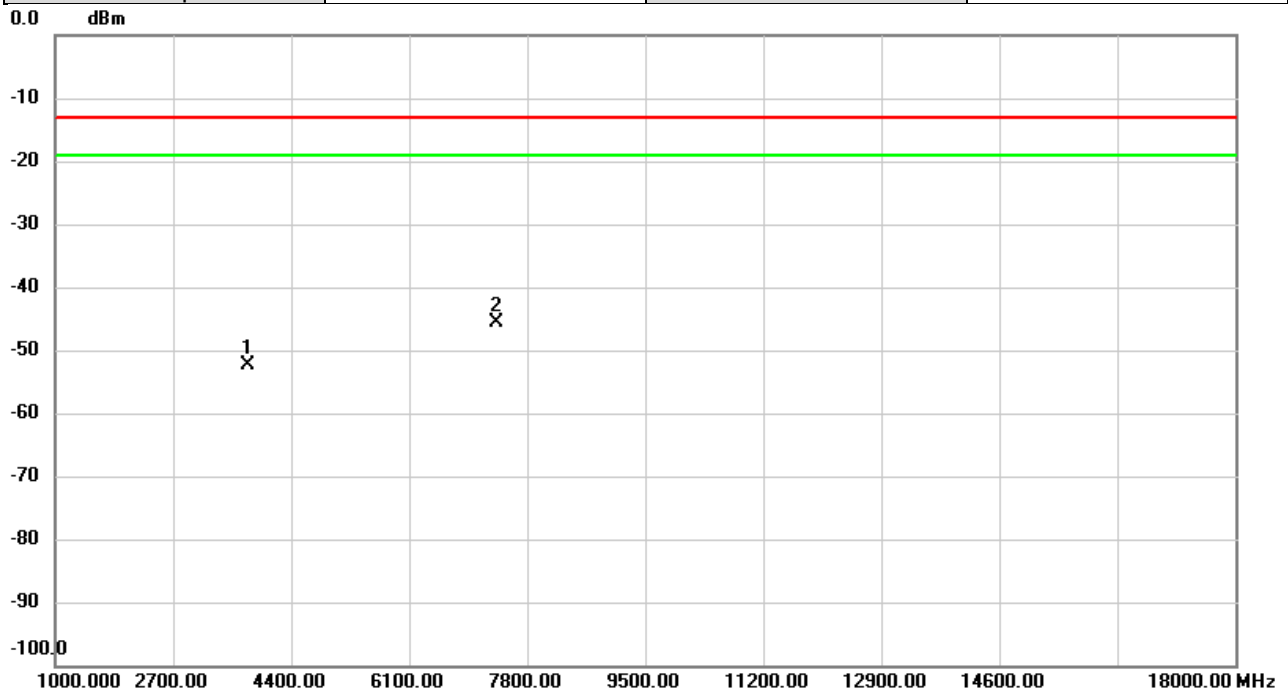


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3782.000	-63.80	11.42	-52.38	-13.00	-39.38	peak	
2	*	7362.000	-63.18	17.50	-45.68	-13.00	-32.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_2A-48A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

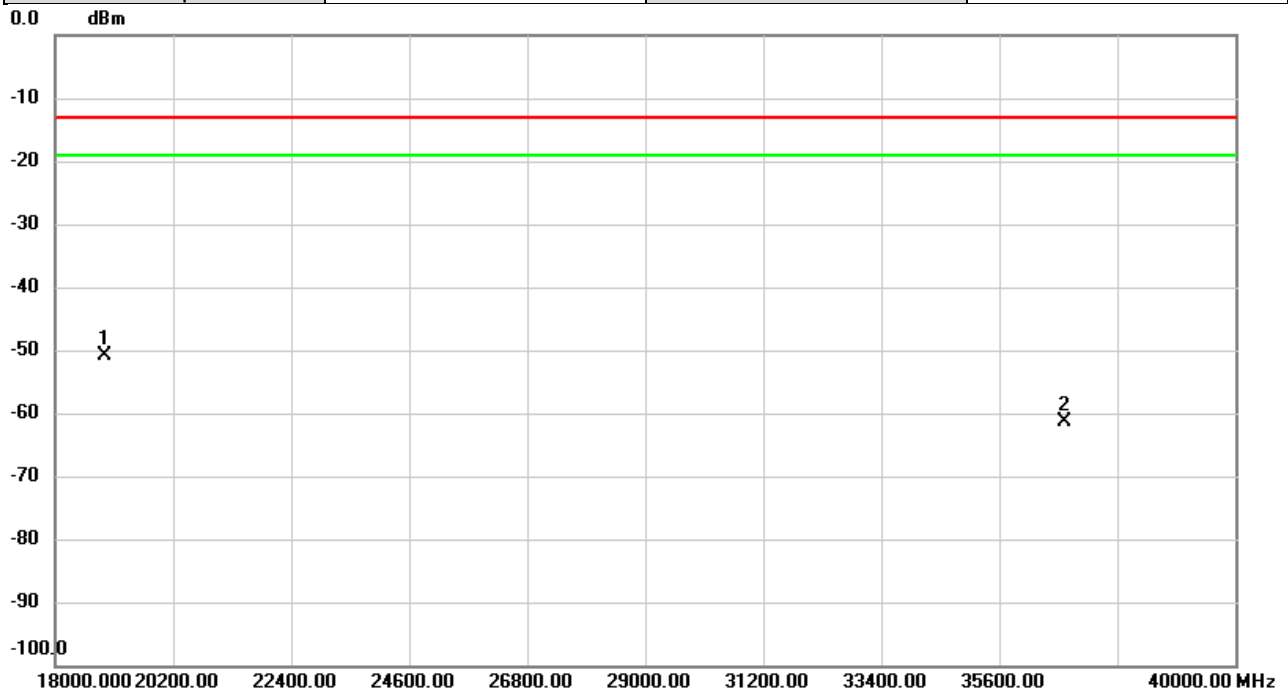


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18910.00	-53.24	2.46	-50.78	-13.00	-37.78	peak	
2		36810.00	-55.61	-5.77	-61.38	-13.00	-48.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA 2A-48A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

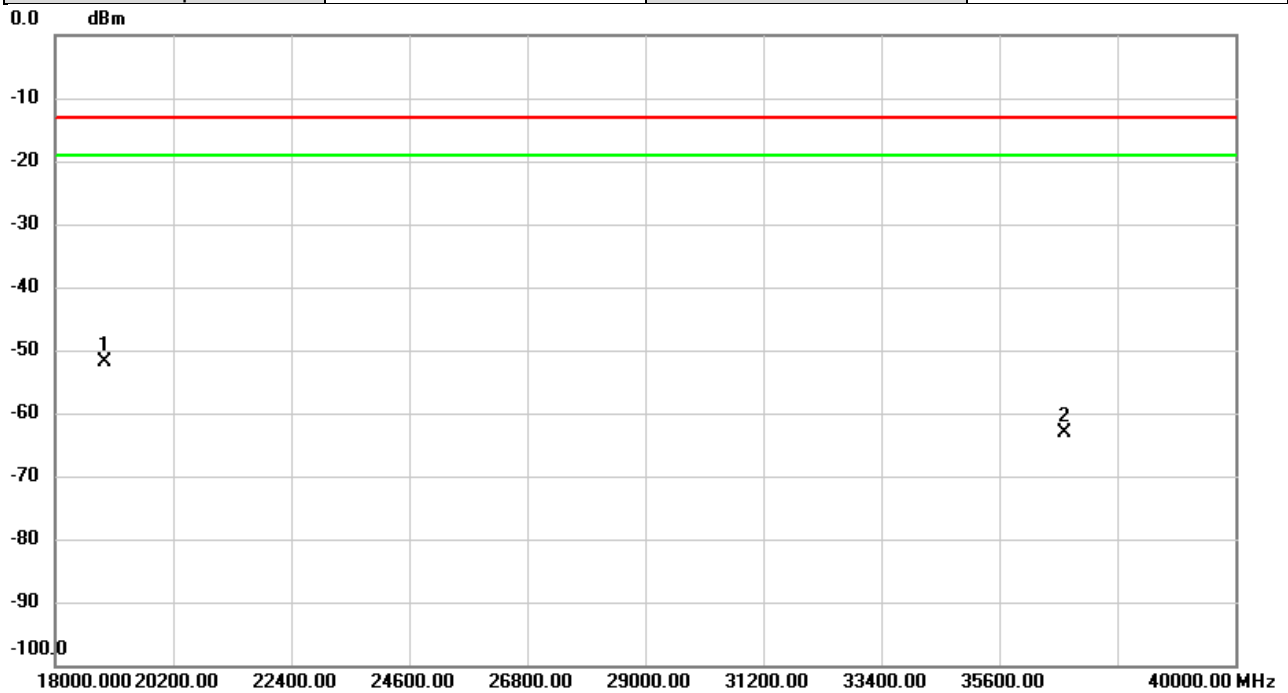


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18910.00	-53.27	1.44	-51.83	-13.00	-38.83	peak	
2		36810.00	-55.83	-7.38	-63.21	-13.00	-50.21	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Vertical
Temp	22°C	Hum.	54%

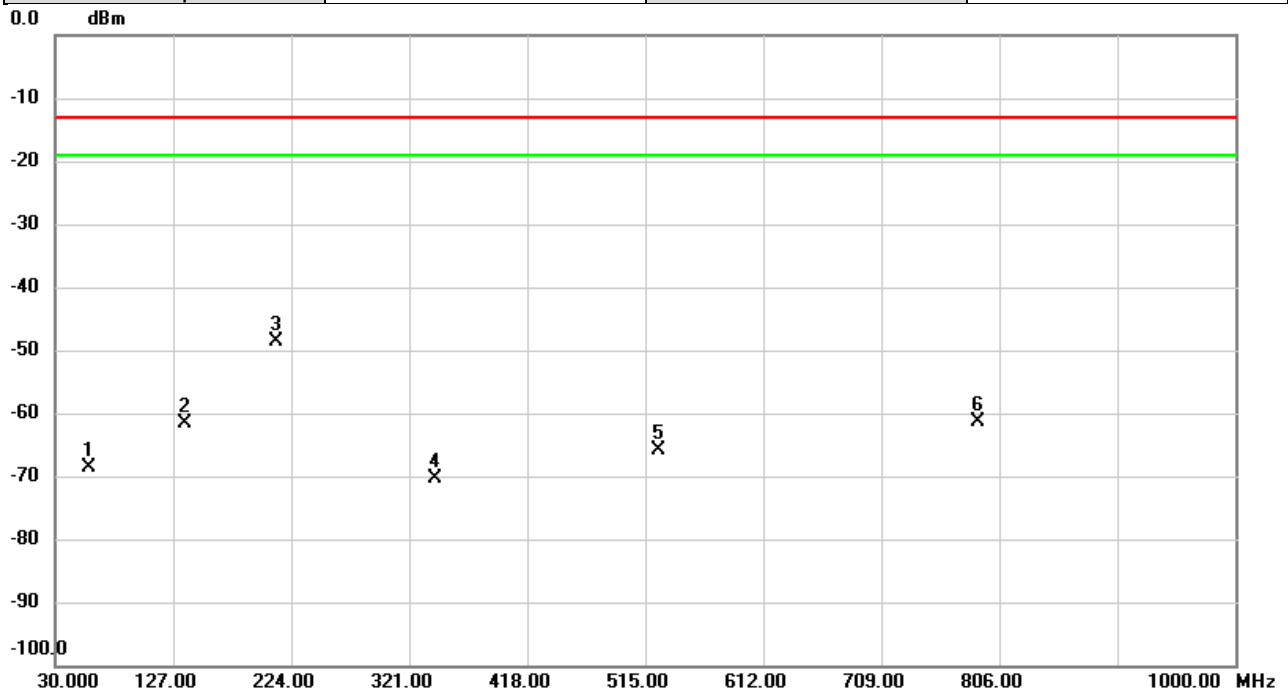


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		57.3217	-63.51	-5.21	-68.72	-13.00	-55.72	peak	
2		136.8616	-59.79	-1.90	-61.69	-13.00	-48.69	peak	
3	*	211.2930	-47.25	-1.31	-48.56	-13.00	-35.56	peak	
4		342.4693	-69.63	-0.81	-70.44	-13.00	-57.44	peak	
5		525.5407	-69.56	3.63	-65.93	-13.00	-52.93	peak	
6		788.2490	-67.25	5.99	-61.26	-13.00	-48.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/26
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	22°C	Hum.	54%

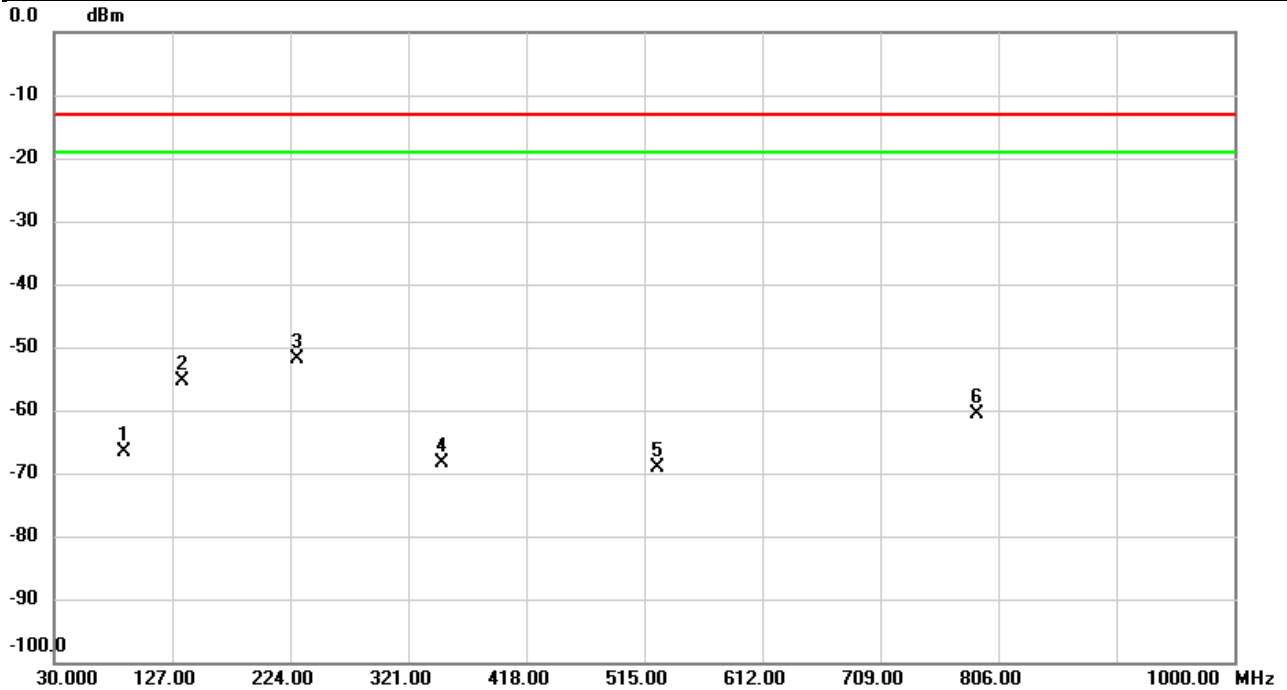


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		87.7473	-60.37	-6.15	-66.52	-13.00	-53.52	peak	
2		135.9563	-51.57	-3.88	-55.45	-13.00	-42.45	peak	
3	*	230.3373	-45.97	-5.82	-51.79	-13.00	-38.79	peak	
4		348.2246	-67.86	-0.53	-68.39	-13.00	-55.39	peak	
5		525.5082	-70.36	1.13	-69.23	-13.00	-56.23	peak	
6		788.2490	-66.79	6.06	-60.73	-13.00	-47.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Vertical
Temp	23°C	Hum.	64%

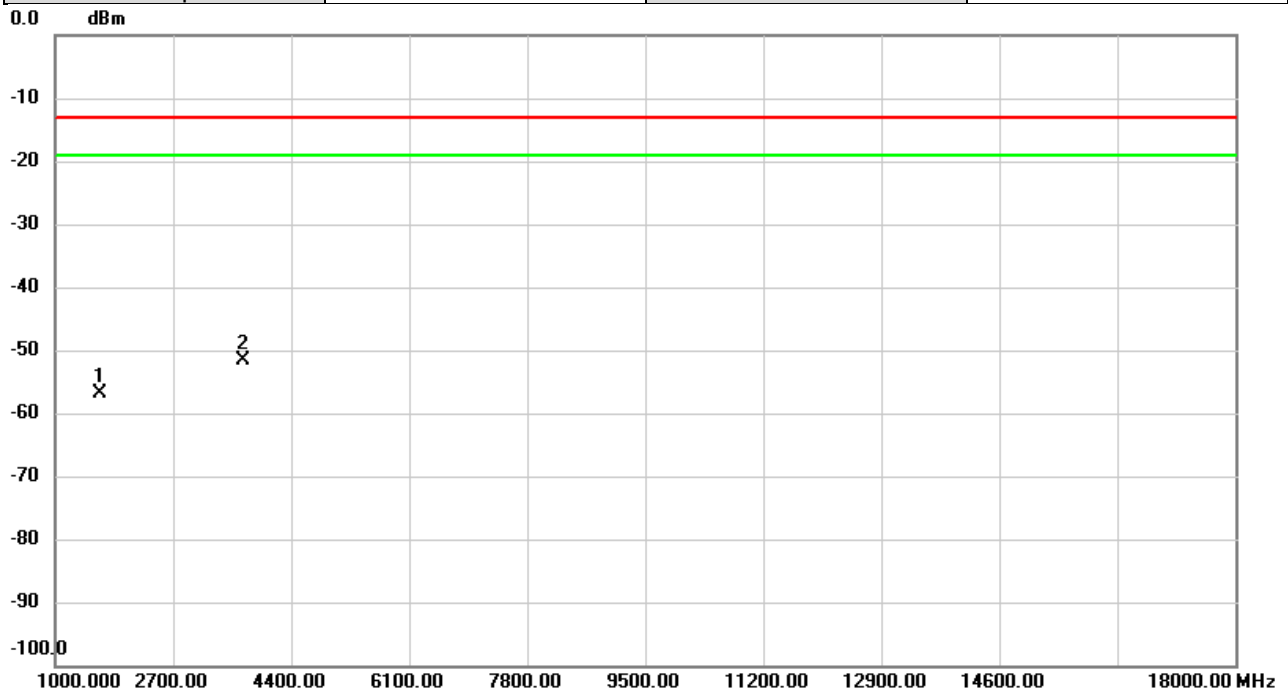


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-62.64	5.72	-56.92	-13.00	-43.92	peak	
2	*	3702.000	-63.32	11.72	-51.60	-13.00	-38.60	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX Low CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

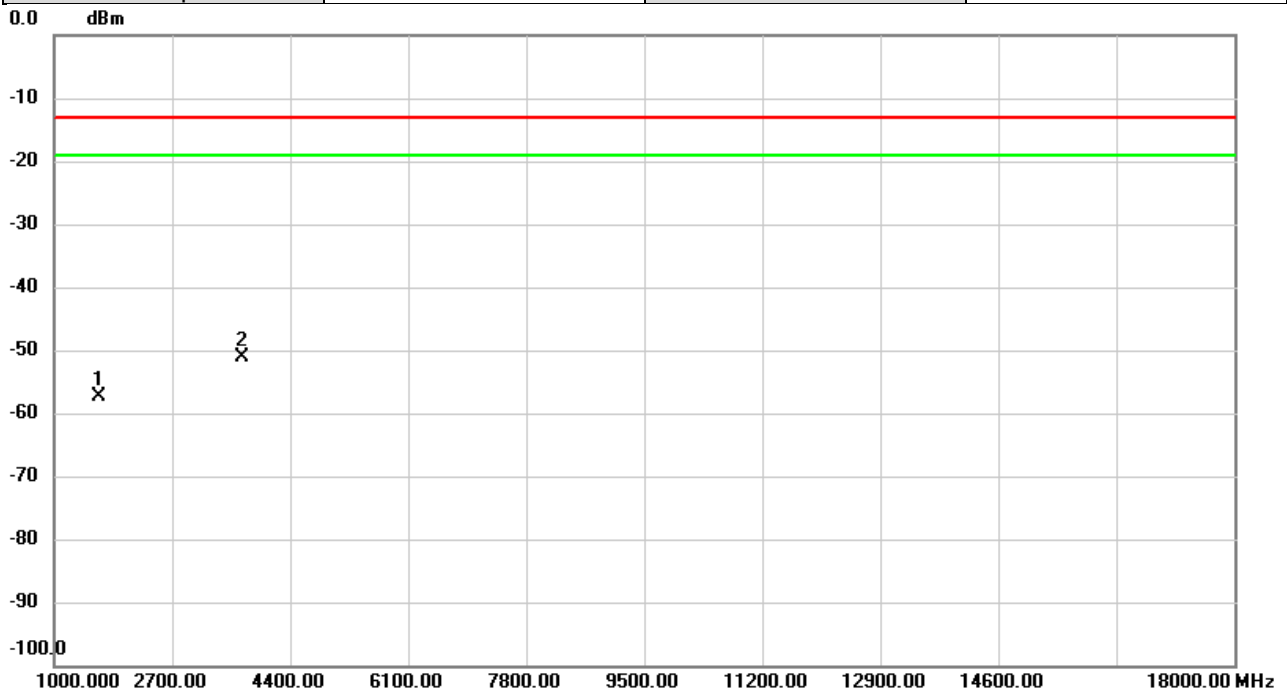


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-62.72	5.42	-57.30	-13.00	-44.30	peak	
2	*	3702.000	-62.37	11.13	-51.24	-13.00	-38.24	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Vertical
Temp	23°C	Hum.	64%

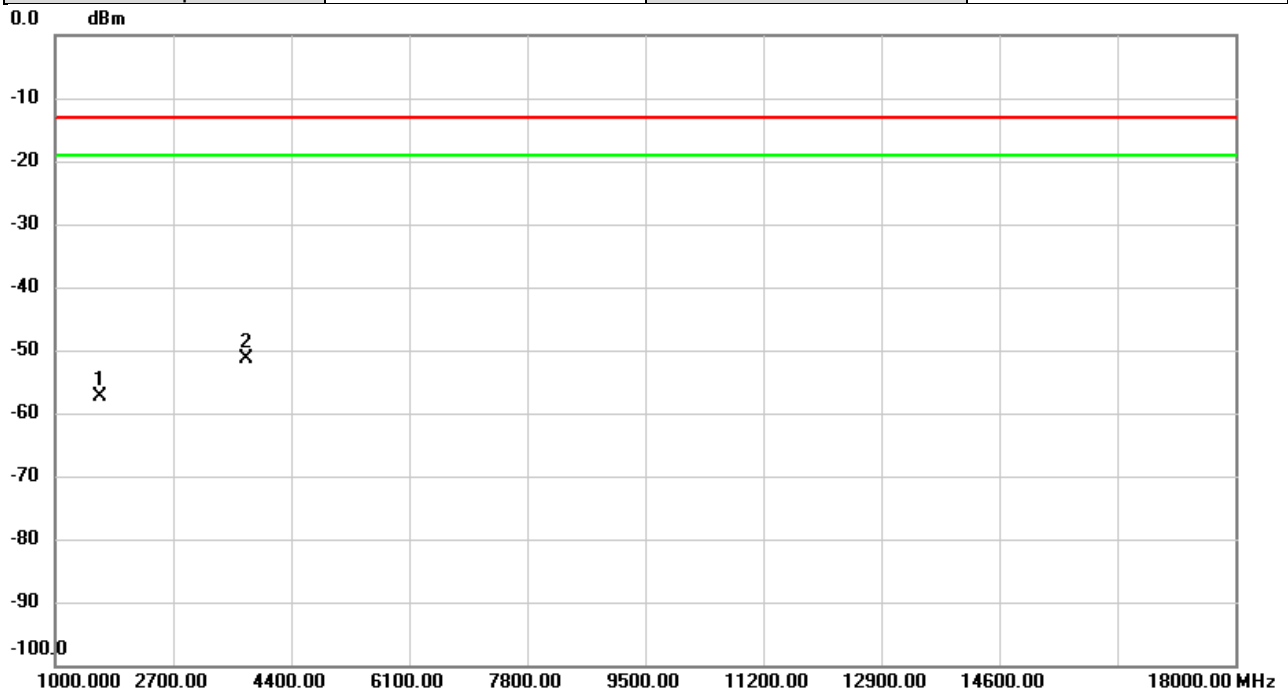


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-63.18	5.72	-57.46	-13.00	-44.46	peak	
2	*	3747.000	-62.89	11.55	-51.34	-13.00	-38.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

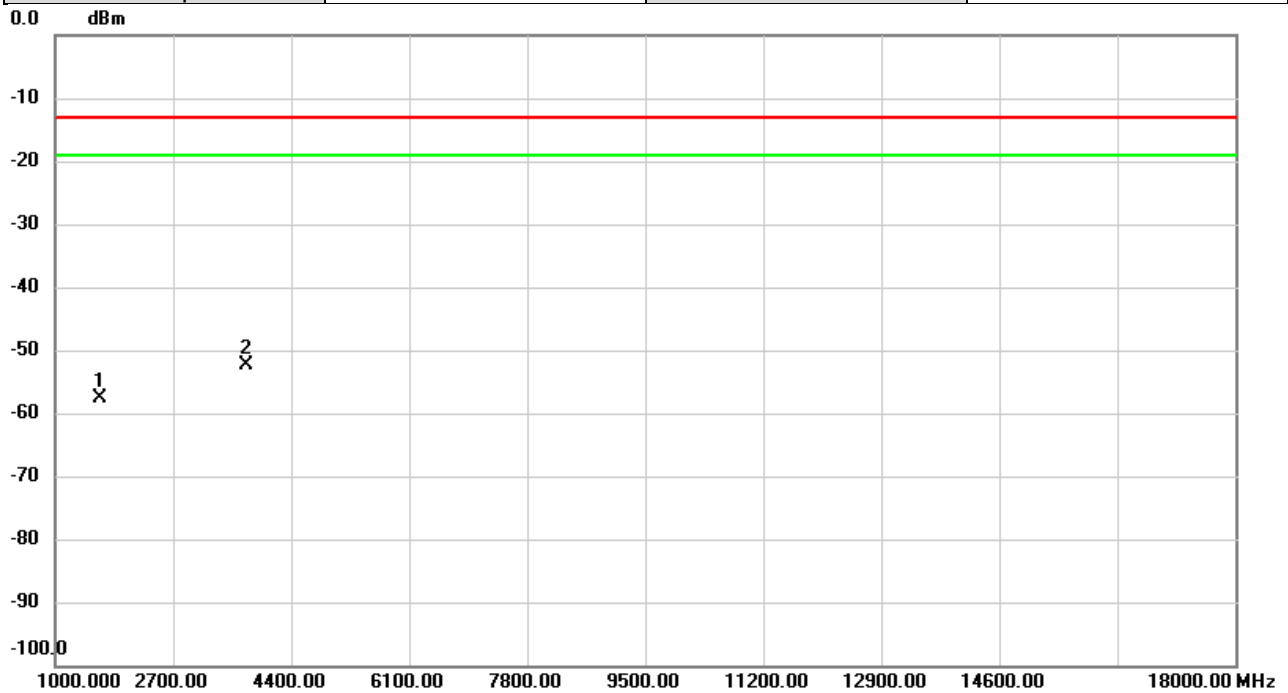


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1649.000	-63.10	5.42	-57.68	-13.00	-44.68	peak	
2	*	3747.000	-63.40	11.13	-52.27	-13.00	-39.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Vertical
Temp	23°C	Hum.	64%

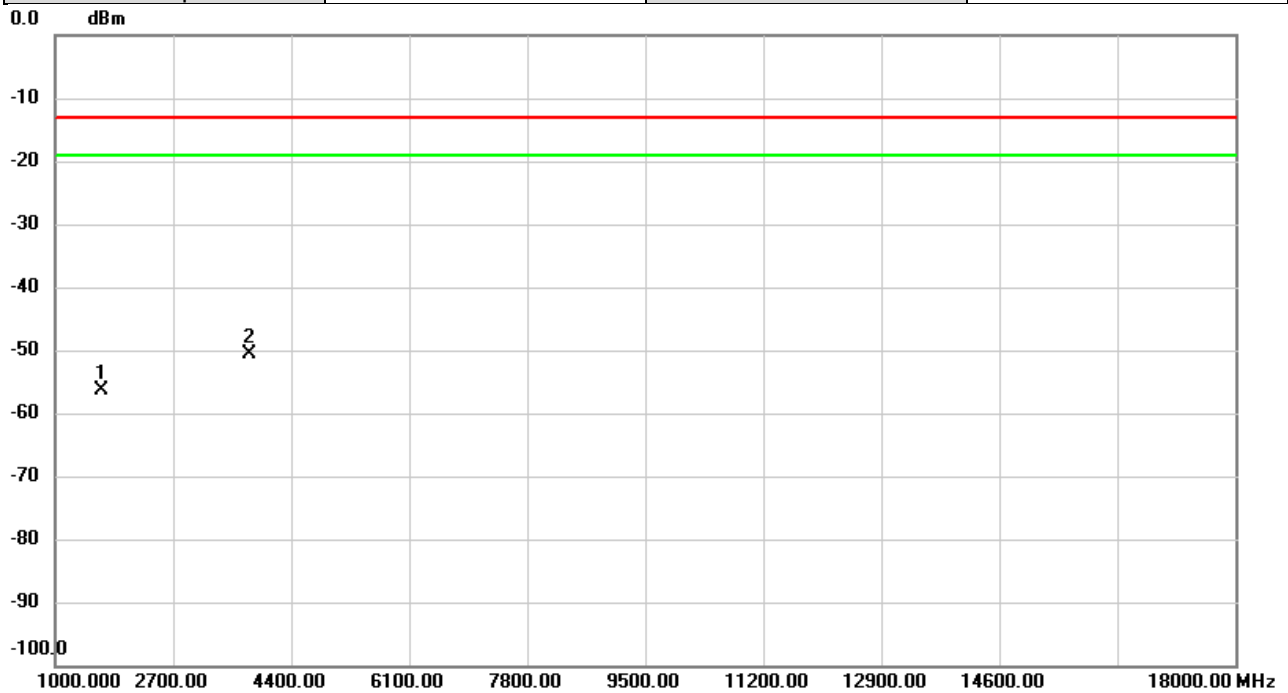


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1669.000	-62.22	5.76	-56.46	-13.00	-43.46	peak	
2	*	3792.000	-62.34	11.63	-50.71	-13.00	-37.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/7
Test Channel	TX High CH	Polarization	Horizontal
Temp	23°C	Hum.	64%

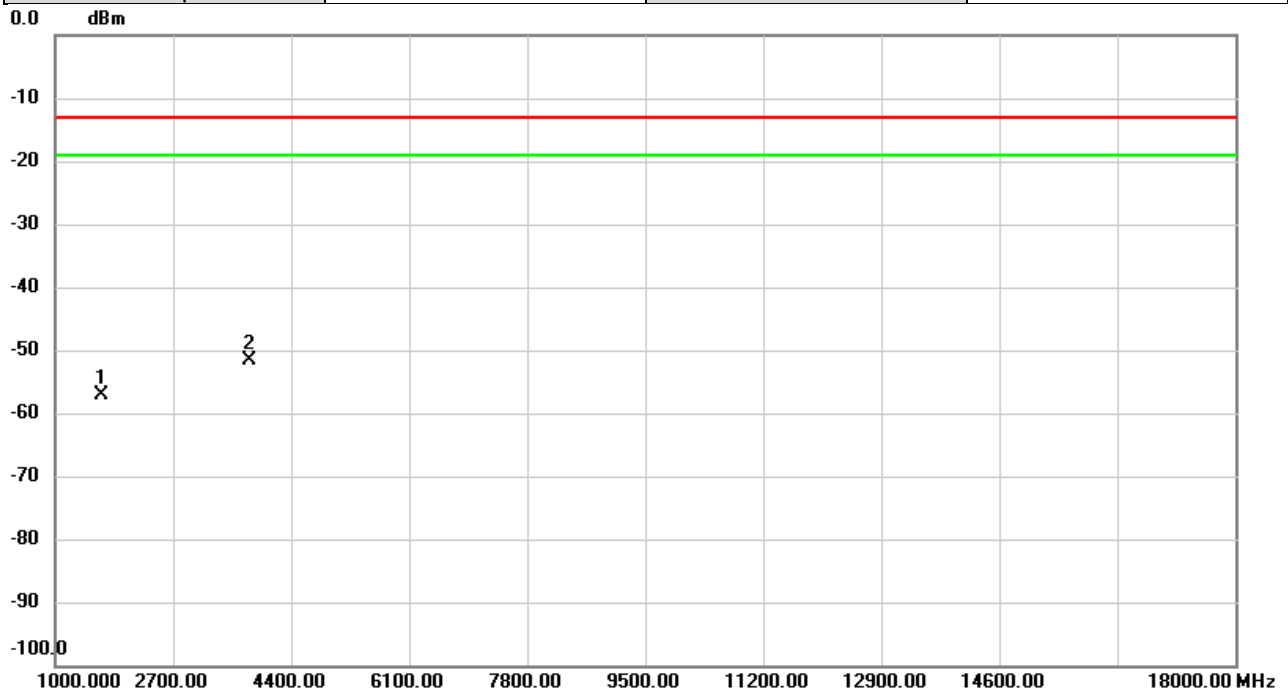


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1669.000	-62.66	5.48	-57.18	-13.00	-44.18	peak	
2	*	3792.000	-63.10	11.52	-51.58	-13.00	-38.58	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Vertical
Temp	27°C	Hum.	59%

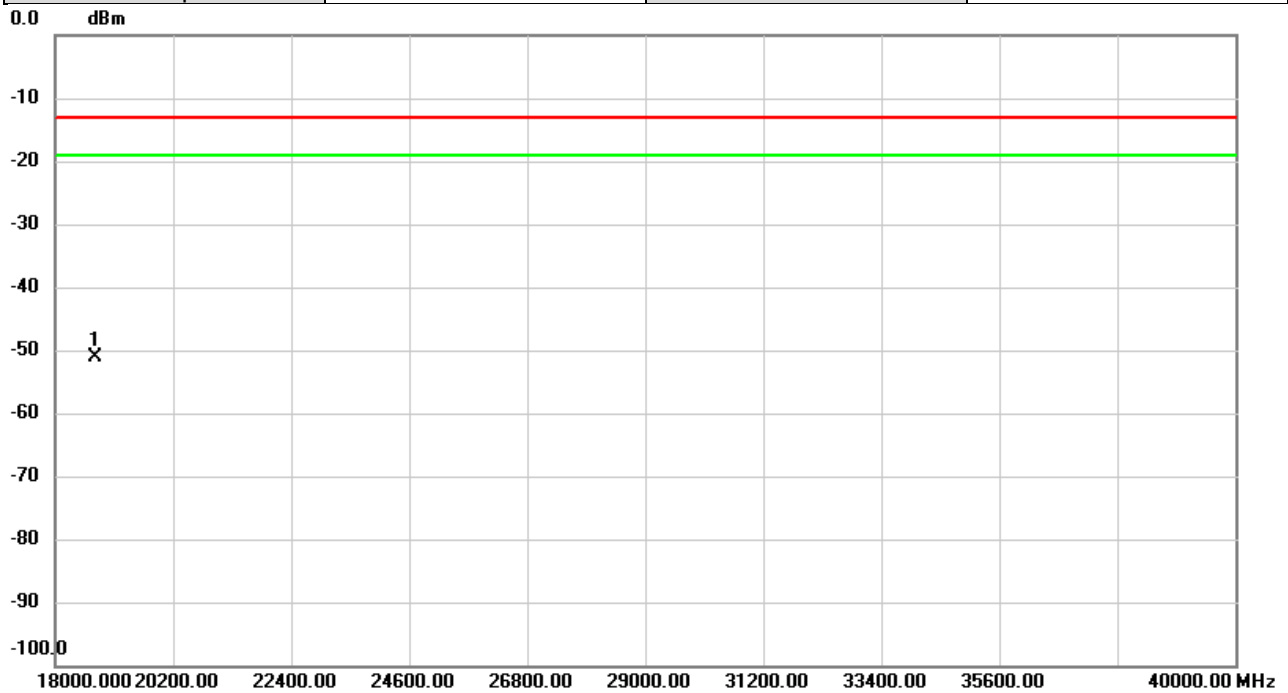


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18735.00	-53.63	2.53	-51.10	-13.00	-38.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band CA_25A-26A	Test Date	2025/5/8
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	27°C	Hum.	59%

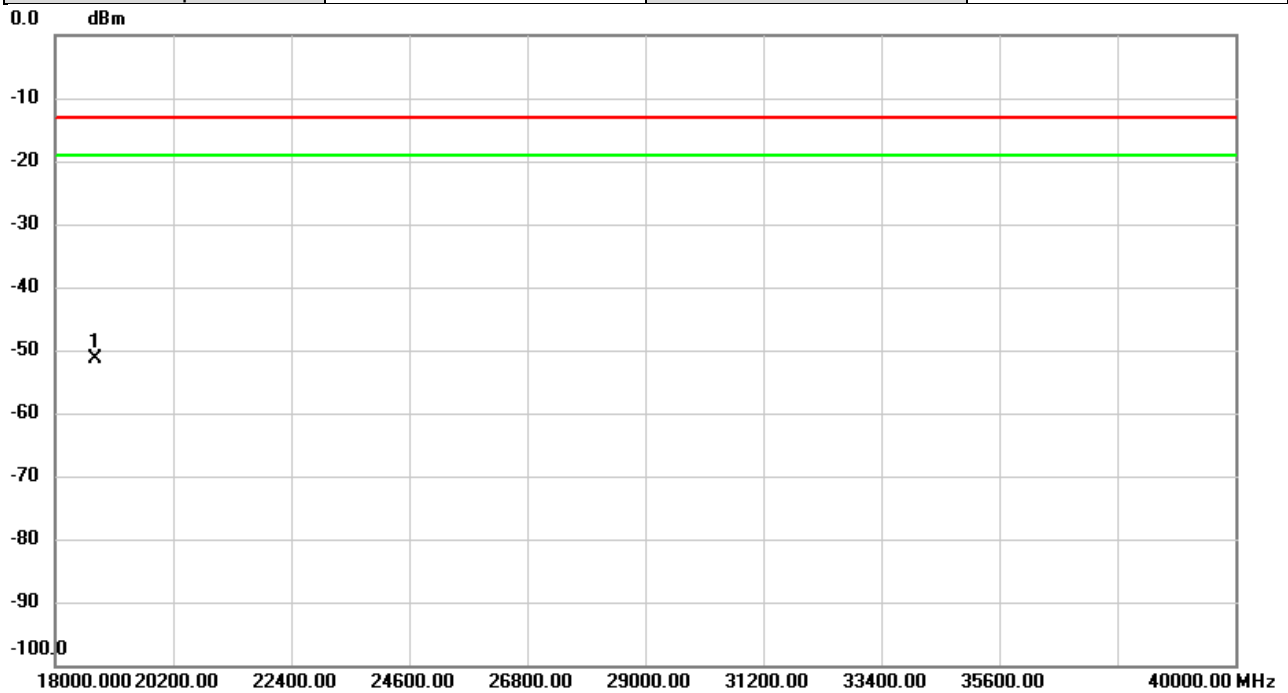

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18735.00	-53.02	1.54	-51.48	-13.00	-38.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report