



TEST REPORT Nr. R20003601

Federal Communication Commission (FCC)

Report Reference No.	R20003601
Date of issue:	16.10.2020
Total number pages:	47
Applicant's name	Infiniteplay S.r.l.
Address	Giacinto Andrea Longhin, 131 – 35129 Padova (PD) – Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 225
Non-standard test method	N/A
Test Report Form No.	15_225CMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2020-05
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	Outdoor entrance panel
Trademark	IpDoor
Manufacturer	Infiniteplay S.r.l.
Model / Type reference	IP220D.10
FCC ID	2AX2X-IPDDP
Rating(s)	24 Vdc 48 Vdc from PoE
Report	
Tested by (name + signature)	C. Panozzo
Approved by (name + signature)	R. Beghetto



1 Summary

1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of test item(s).....	5
6.1	Photos of the test item	6
7	Verdict summary section	8
8	Test conditions	10
8.1	General	10
9	Test results	11
9.1	Antenna requirements	11
9.2	Conducted emission	12
9.3	Radiated emissions	22
9.4	Field strength with the assigned band	35
9.5	Frequency tolerance	39
9.6	20 dB bandwidth	41



2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2019	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

Revision index	Date	Change history
1.0	16.10.2020	--



Testing and sampling:	
Date of receipt of test item.....	07.01.2020
Testing start date	09.10.2020
Testing end date	15.10.2020
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P200013
General remarks:	
This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. “(see appended table)”: refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	



6 General description of test item(s)

Description	Outdoor entrance panel							
Model Number	IP220D.10							
FCC ID	2AX2X-IPDDP							
Serial Number	--							
Brand name	IpDoor							
Nominal frequency	13,56 MHz							
Rated power supply	Voltage and Frequency			Reference poles				
				N	L1	L2	L3	PE
	☐	AC:		☐	☐	☐	☐	☐
	☐	AC:		☐	☐	☐	☐	☐
	☒	DC: 24 V						☐
Software version	1.03							
General mounting position	☐	Table top equipment						
	☒	Wall/ceiling mounted equipment						
	☐	Floor standing equipment						
	☐	Hand-held equipment						
Type of equipment	☒	Transmitter unit						
	☐	Receiver unit						
Type of station	☒	Fixed station						
	☐	Portable station						
	☐	Mobile station						
Operating modes	No.	Operating mode of test item						
	1	TX mode, continuous transmission at 13,56 MHz						
	2	TX dummy mode, continuous transmission at 13,56 MHz with 50 Ω termination						
Supplemental information to the operating modes	All tests have been performed with EUT supplied from 24 Vdc because, as declared by the manufacturer, this is the power supply that provided the highest emission level. With EUT supplied from PoE, the certified WiFi module would not be enabled							
Accessories (not part of the test item)	PC							
	Smartphone							
	PoE power unit							
Declination of responsibility	Components list and software/hardware version (if reported) are provided by the manufacturer. CMC Centro Misure Compatibilità S.r.l. cannot be considered responsible for these information, for any other document sent by the manufacturer and for any difference between the software version present in the tested sample and that present in the object intended for final sale. In some cases, the software in the tested sample is in a version dedicated exclusively to the test, and therefore does not represent the software installed in the final version of the product.							



6.1 Photos of the test item







7 Verdict summary section

FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 225			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.203	Antenna requirements	--	P
Part 15.207	Conducted emissions	ANSI C63.10	P
Part 15.209	Radiated emissions	ANSI C63.10	P
Part 15.225	Field strength with the assigned band	ANSI C63.10	P
Part 15.225 (e)	Frequency tolerance	ANSI C63.10	P
Part 15.215	20 dB bandwidth	ANSI C63.10	P



Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2019	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices





8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		



9 Test results

9.1 Antenna requirements

Tested by	C. Panozzo	
Test date	09.10.2020	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded	
Antenna type.....	☒	Integral antenna
	☐	External antenna
Antenna gain.....	0 dBi	
External R.F. power amplifier	Not Present	




9.2 Conducted emission

Tested by	C. Panozzo	
Test date	10.10.2020	
Test location (stand)	Shielded chamber (CMC A001)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.207 ANSI C63.10 cl. 6.2	
Test set-up description	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary Test set-up description	--	
Test method applied	☒	Artificial mains network, 50 μ H/50 Ω LISN
	☐	Other:

Acceptance limits

Frequency range (MHz)	$\text{dB}(\mu\text{V})$ Quasi-peak	$\text{dB}(\mu\text{V})$ Average
0,15 to 0,50	66 to 56	56 to 46
0,5 to 5	56	46
5 to 30	60	50

Test setup

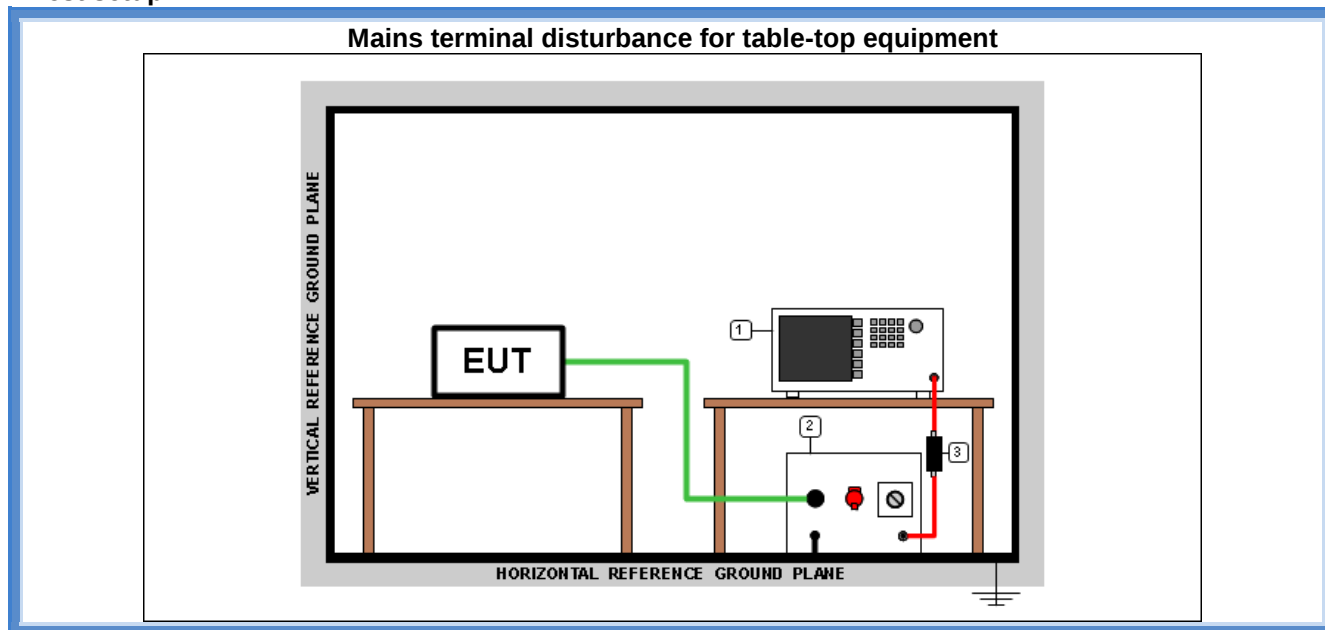

Test setup PE001_01

Test setup PE001_01				
Nr.	Id. Number	Manufacturer	Model	Description
3	CMC S010	Rohde & Schwarz	ESH3-Z2	Pulse limiter
2	CMC S200	Schwarzbeck	NSLK 8128	V-LISN
1	CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz

Result

Line	Frequency Range (MHz)	Graphs	Remarks	Result
N	0,15 – 30	G20003610	TX mode	P
L1	0,15 – 30	G20003611	TX mode	P
L1	0,15 – 30	G20003612	TX mode with 50 Ω termination	P
N	0,15 – 30	G20003613	TX mode with 50 Ω termination	P

Remarks: tests performed on 120 Vac side of AC/DC power unit, peaks above the limits at 13,56 MHz are due to the main transmitting frequency


Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

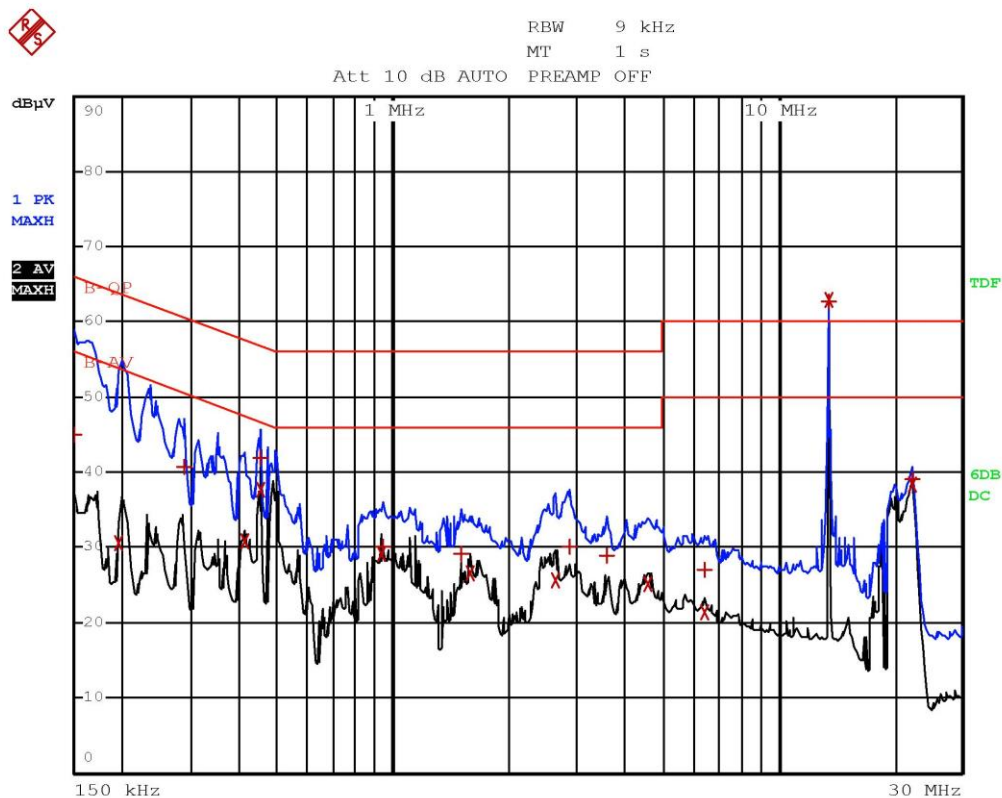


Panozzo 20003610 Line N TX/RX



EDIT PEAK LIST (Final Measurement Results)				
Trace1:	B-QP			
Trace2:	B-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBpV	DELTA LIMIT dB	
1 Quasi Peak	150 kHz	45.00	-20.99	
2 Average	198 kHz	30.64	-23.05	
1 Quasi Peak	286 kHz	40.83	-19.80	
2 Average	410 kHz	30.93	-16.71	
1 Quasi Peak	454 kHz	41.93	-14.86	
2 Average	454 kHz	37.56	-9.23	
2 Average	938 kHz	29.24	-16.76	
1 Quasi Peak	946 kHz	30.16	-25.83	
1 Quasi Peak	1.51 MHz	29.18	-26.81	
2 Average	1.594 MHz	26.52	-19.47	
2 Average	2.634 MHz	25.62	-20.38	
1 Quasi Peak	2.866 MHz	30.02	-25.97	
1 Quasi Peak	3.606 MHz	28.89	-27.10	
2 Average	4.57 MHz	25.11	-20.88	
2 Average	6.434 MHz	21.28	-28.72	
1 Quasi Peak	6.454 MHz	27.00	-32.99	
1 Quasi Peak	13.562 MHz	62.67	2.67	
2 Average	13.562 MHz	62.90	12.90	
1 Quasi Peak	22.246 MHz	39.07	-20.92	
2 Average	22.246 MHz	38.33	-11.66	

Panozzo 20003610 Line N TX/RX

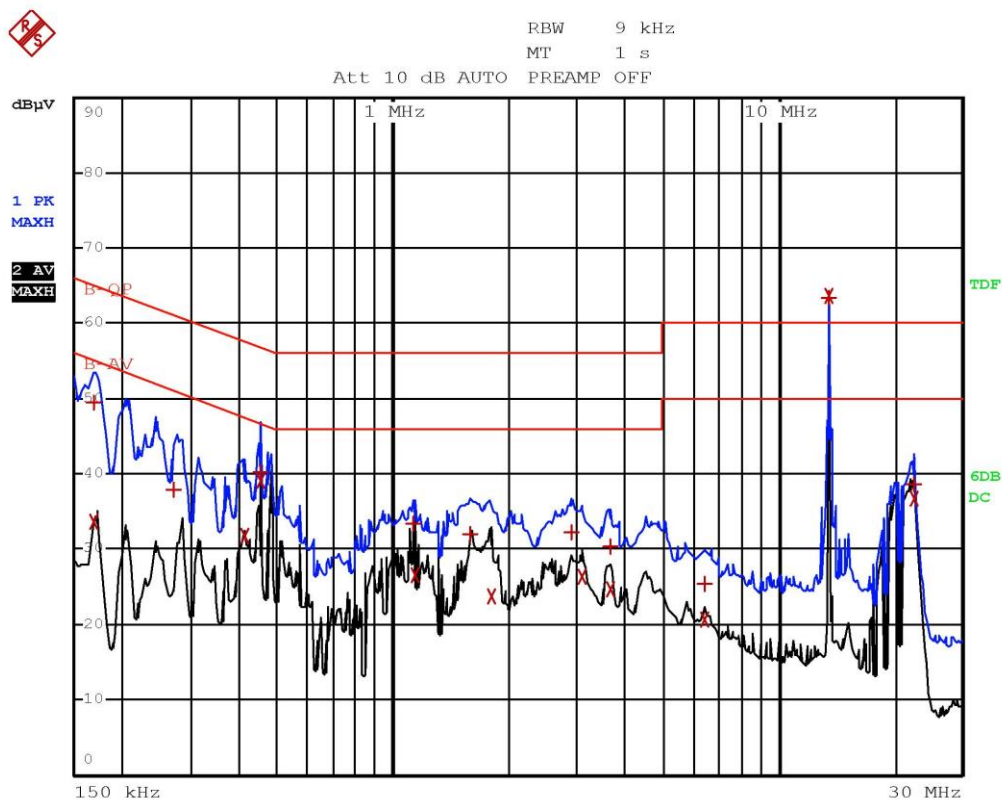


Panozzo 20003611 Line L TX/RX



EDIT PEAK LIST (Final Measurement Results)				
Trace1:	B-QP			
Trace2:	B-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB	
1 Quasi Peak	170 kHz	49.51	-15.44	
2 Average	170 kHz	33.70	-21.25	
1 Quasi Peak	274 kHz	37.90	-23.09	
2 Average	410 kHz	31.70	-15.94	
2 Average	450 kHz	39.20	-7.67	
1 Quasi Peak	454 kHz	40.20	-16.59	
1 Quasi Peak	1.134 MHz	33.53	-22.46	
2 Average	1.142 MHz	26.47	-19.52	
1 Quasi Peak	1.582 MHz	32.07	-23.92	
2 Average	1.798 MHz	23.85	-22.14	
1 Quasi Peak	2.922 MHz	32.25	-23.74	
2 Average	3.106 MHz	26.36	-19.63	
1 Quasi Peak	3.662 MHz	30.46	-25.53	
2 Average	3.674 MHz	24.61	-21.38	
1 Quasi Peak	6.426 MHz	25.30	-34.69	
2 Average	6.434 MHz	20.57	-29.42	
1 Quasi Peak	13.562 MHz	63.30	3.30	
2 Average	13.562 MHz	63.55	13.55	
1 Quasi Peak	22.49 MHz	38.59	-21.40	
2 Average	22.49 MHz	36.80	-13.19	

Panozzo 20003611 Line L TX/RX

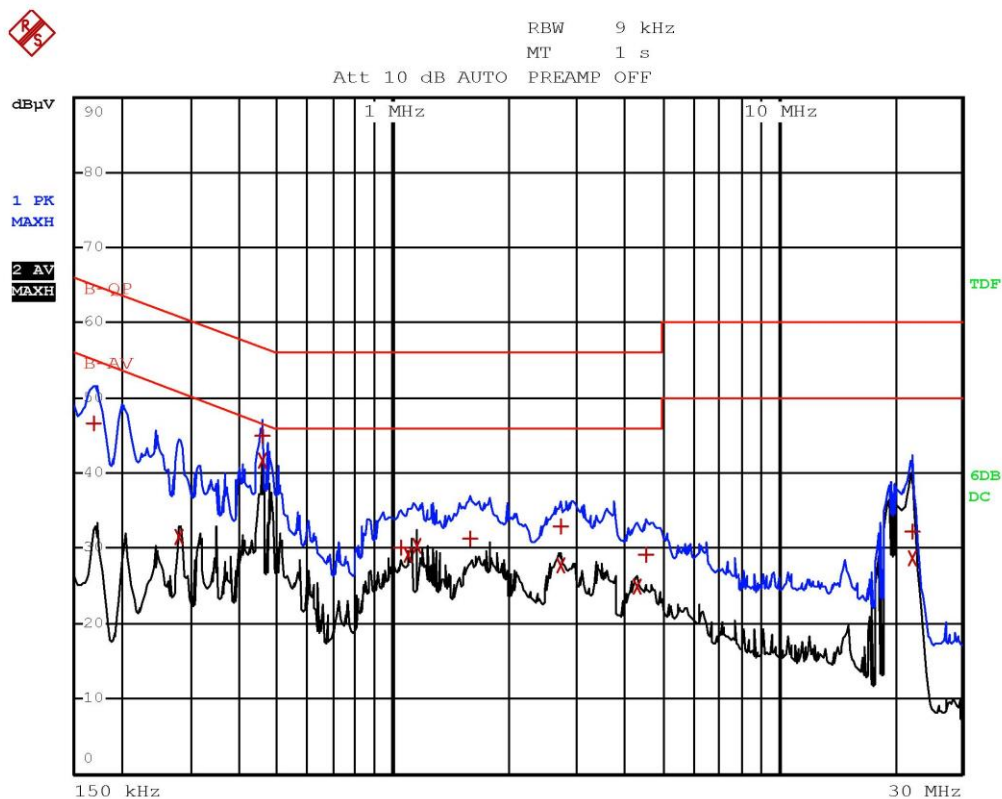


Panozzo 20003612 Line L TX/RX antenna 50 Ohm



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	B-QP		
Trace2:	B-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBpV	DELTA LIMIT dB
1 Quasi Peak	170 kHz	46.58	-18.37
2 Average	282 kHz	31.57	-19.18
1 Quasi Peak	458 kHz	44.88	-11.83
2 Average	458 kHz	41.64	-5.07
1 Quasi Peak	1.046 MHz	30.11	-25.88
2 Average	1.09 MHz	29.25	-16.74
2 Average	1.154 MHz	30.33	-15.66
1 Quasi Peak	1.582 MHz	31.29	-24.71
1 Quasi Peak	2.73 MHz	32.95	-23.04
2 Average	2.73 MHz	27.83	-18.16
2 Average	4.31 MHz	24.98	-21.01
1 Quasi Peak	4.566 MHz	29.11	-26.88
1 Quasi Peak	22.35 MHz	32.29	-27.70
2 Average	22.35 MHz	28.62	-21.37

Panozzo 20003612 Line L TX/RX antenna 50 Ohm

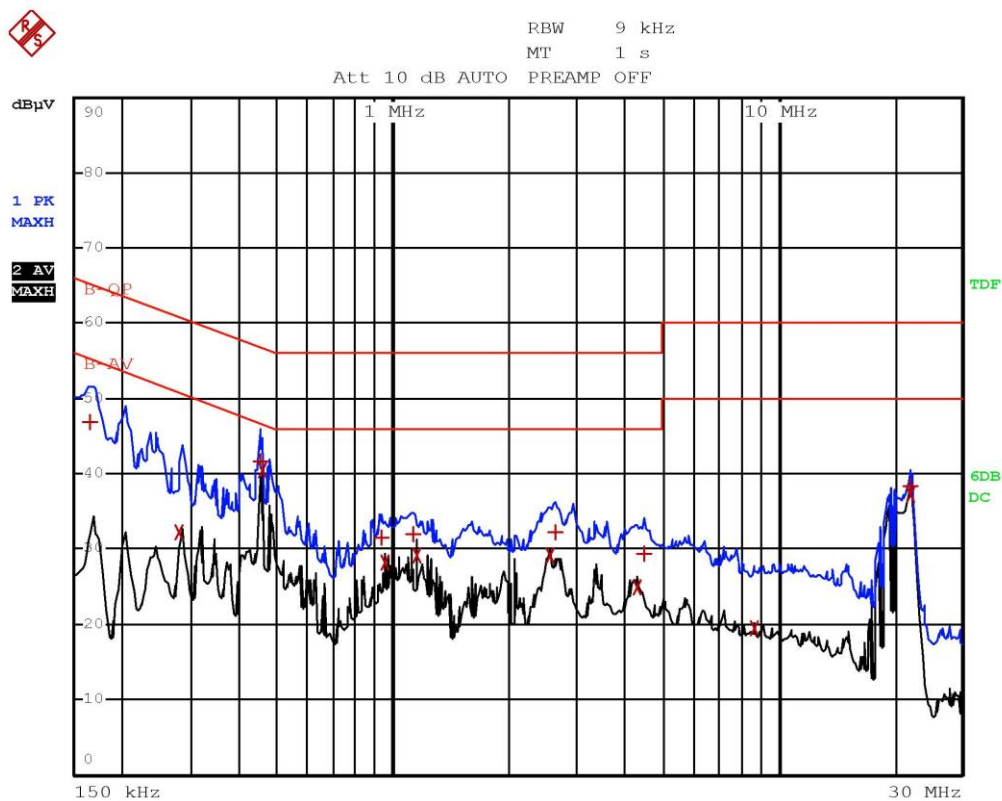

Panozzo 20003613 Line N TX/RX antenna 50 Ohm



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	B-QP		
Trace2:	B-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	166 kHz	46.84	-18.31
2 Average	282 kHz	32.33	-18.41
1 Quasi Peak	454 kHz	41.73	-15.06
2 Average	458 kHz	40.61	-6.11
1 Quasi Peak	930 kHz	31.55	-24.44
2 Average	950 kHz	28.27	-17.73
1 Quasi Peak	1.134 MHz	31.94	-24.05
2 Average	1.154 MHz	29.15	-16.84
2 Average	2.558 MHz	29.19	-16.80
1 Quasi Peak	2.646 MHz	32.27	-23.73
2 Average	4.314 MHz	24.91	-21.08
1 Quasi Peak	4.502 MHz	29.48	-26.51
2 Average	8.654 MHz	19.45	-30.54
1 Quasi Peak	22.122 MHz	38.43	-21.56
2 Average	22.122 MHz	37.25	-12.74

Panozzo 20003613 Line N TX/RX antenna 50 Ohm



9.3 Radiated emissions

Tested by	C. Panozzo	
Test date	09.10.2020	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--	
Test method applied	☒	SAC with measurement distance [m]: 10
Supplementary information	--	

Acceptance limits


Frequency range (MHz)	Test distance (m)	Limits [dB(μV/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Frequency (MHz)	Test distance (m)	AV limits [dB(μV/m)]	Peak limits [dB(μV/m)]
> 1000	3	54	74

Test setup


Frequency ≤ 30 MHz

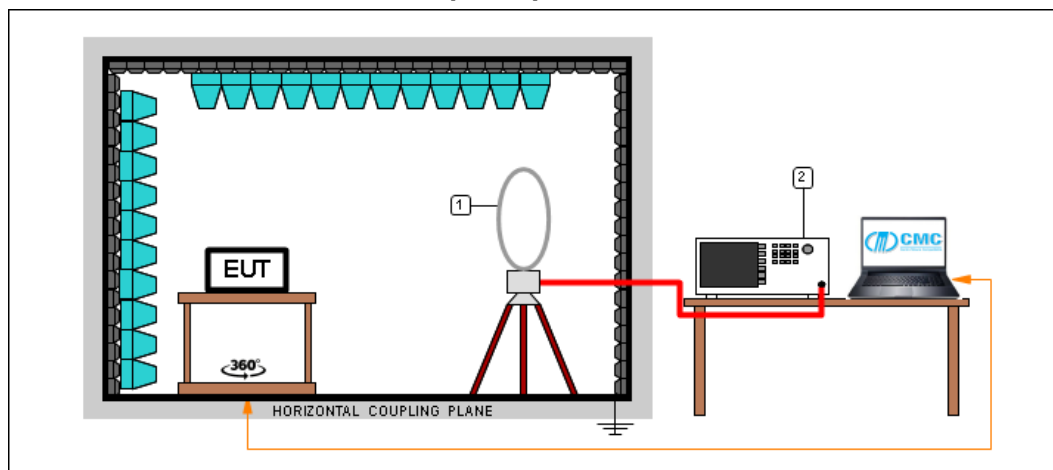

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Frequency ≤ 1 GHz

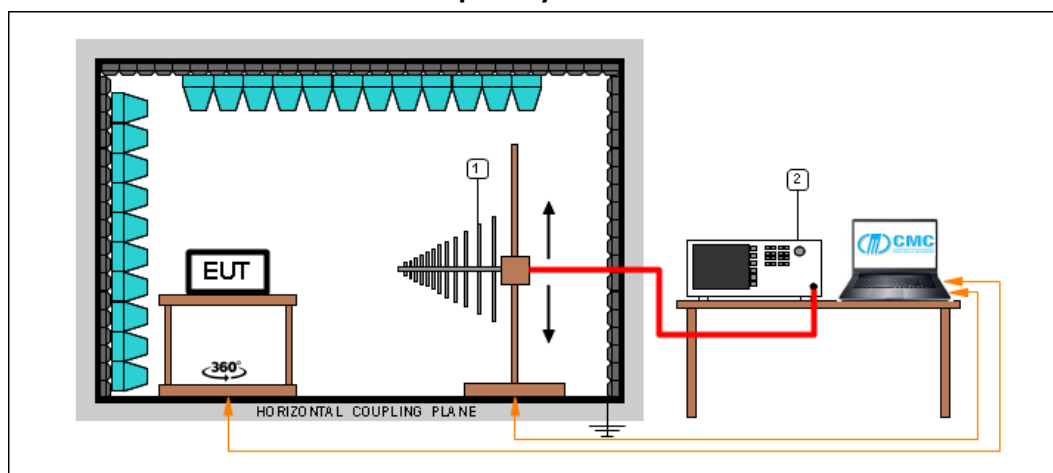

Test setup PE004_02

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna




Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	30 – 300	G20003601	--	P
H	30 – 300	G20003602	--	P
H	300 – 1000	G20003603	--	P
V	300 – 1000	G20003604	--	P
Loop	0,009 – 30	G20003605	--	P


Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

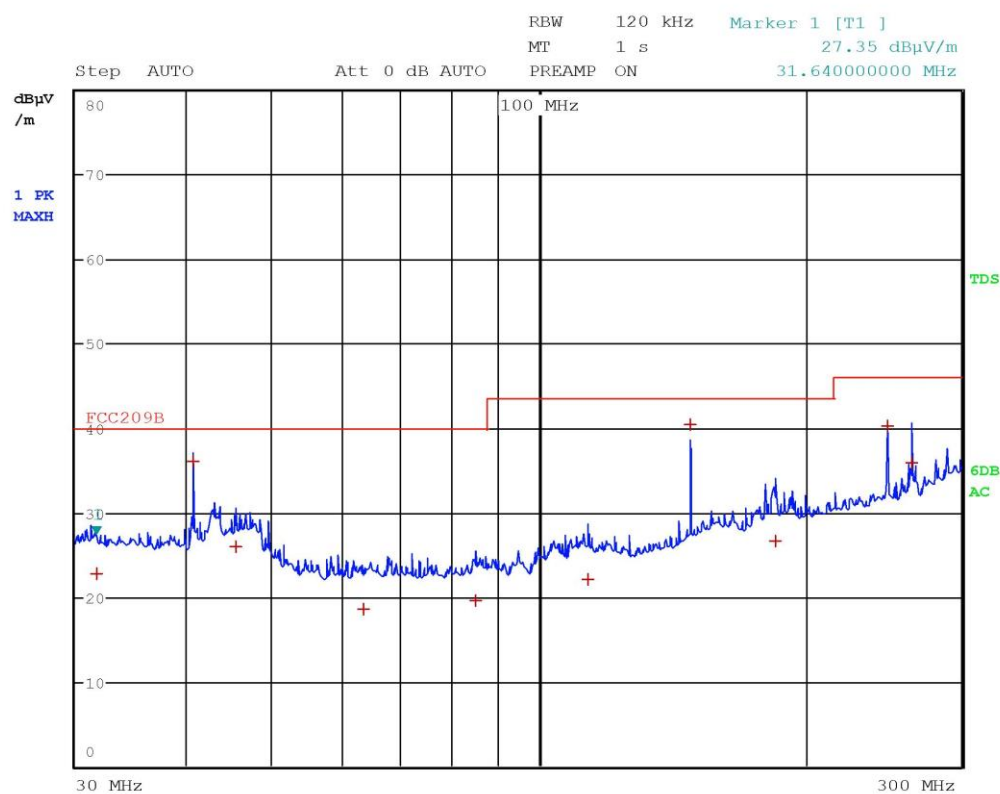


Panozzo 20003601 Vert




EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31.64 MHz	22.70	-17.29
1 Quasi Peak	40.68 MHz	36.05	-3.94
1 Quasi Peak	45.48 MHz	25.92	-14.07
1 Quasi Peak	63.4 MHz	18.57	-21.42
1 Quasi Peak	84.76 MHz	19.54	-20.45
1 Quasi Peak	113.72 MHz	22.17	-21.34
1 Quasi Peak	148.48 MHz	40.37	-3.14
1 Quasi Peak	184.76 MHz	26.72	-16.79
1 Quasi Peak	247.48 MHz	40.25	-5.76
1 Quasi Peak	264 MHz	35.86	-10.15

Panozzo 20003601 Vert



LAB N° 0168 L

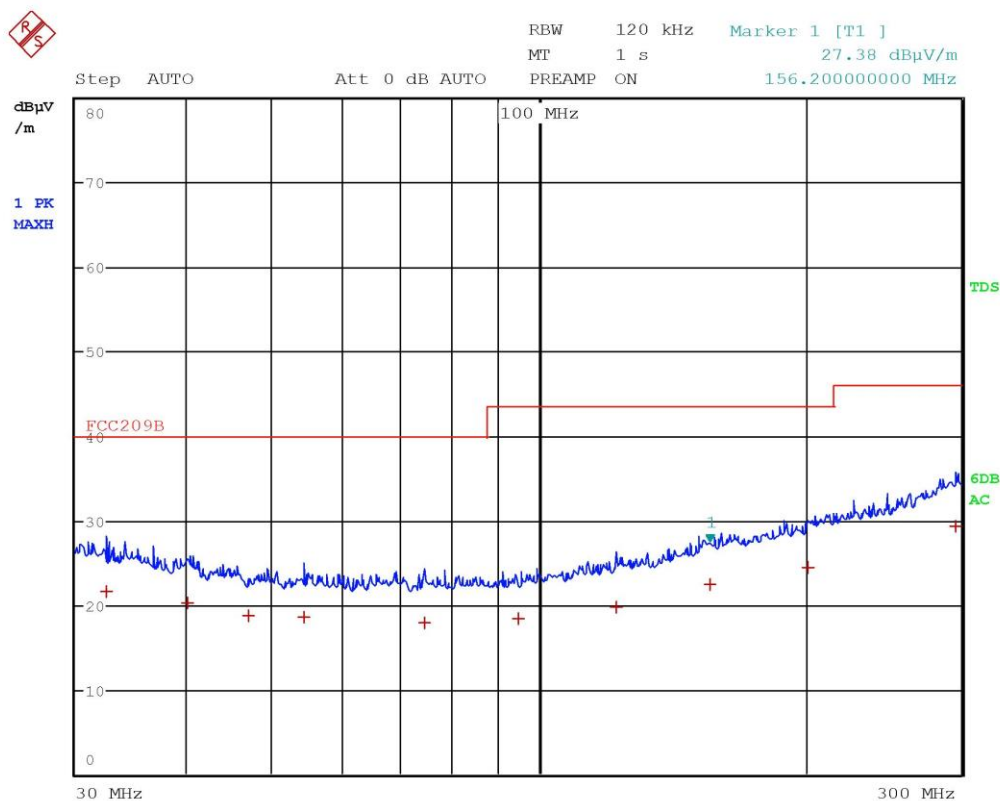


Panozzo 20003602 Horiz



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	32.44 MHz	21.51	-18.48
1 Quasi Peak	40.08 MHz	20.20	-19.79
1 Quasi Peak	47.04 MHz	18.68	-21.31
1 Quasi Peak	54.32 MHz	18.55	-21.44
1 Quasi Peak	74.28 MHz	17.82	-22.17
1 Quasi Peak	94.88 MHz	18.36	-25.15
1 Quasi Peak	122.4 MHz	19.71	-23.80
1 Quasi Peak	156.2 MHz	22.43	-21.08
1 Quasi Peak	201.68 MHz	24.53	-18.98
1 Quasi Peak	295.68 MHz	29.32	-16.70

Panozzo 20003602 Horiz

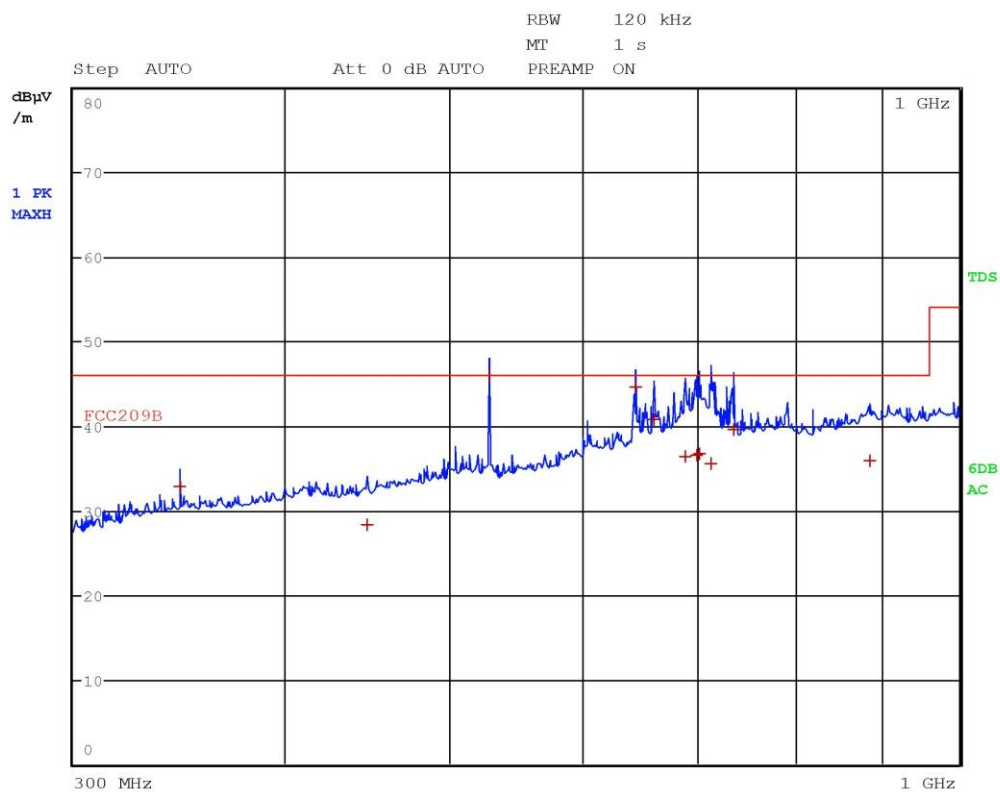


Panozzo 20003603 Horiz



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	346.48 MHz	32.81	-13.20
1 Quasi Peak	447.08 MHz	28.40	-17.62
1 Quasi Peak	527.96 MHz	46.02	0.00
1 Quasi Peak	643.44 MHz	44.66	-1.35
1 Quasi Peak	659.92 MHz	40.81	-5.20
1 Quasi Peak	689.24 MHz	36.46	-9.55
1 Quasi Peak	699.84 MHz	36.52	-9.49
1 Quasi Peak	702.32 MHz	36.72	-9.29
1 Quasi Peak	713.44 MHz	35.55	-10.46
1 Quasi Peak	735.4 MHz	39.51	-6.50
1 Quasi Peak	885.32 MHz	35.82	-10.19

Panozzo 20003603 Horiz

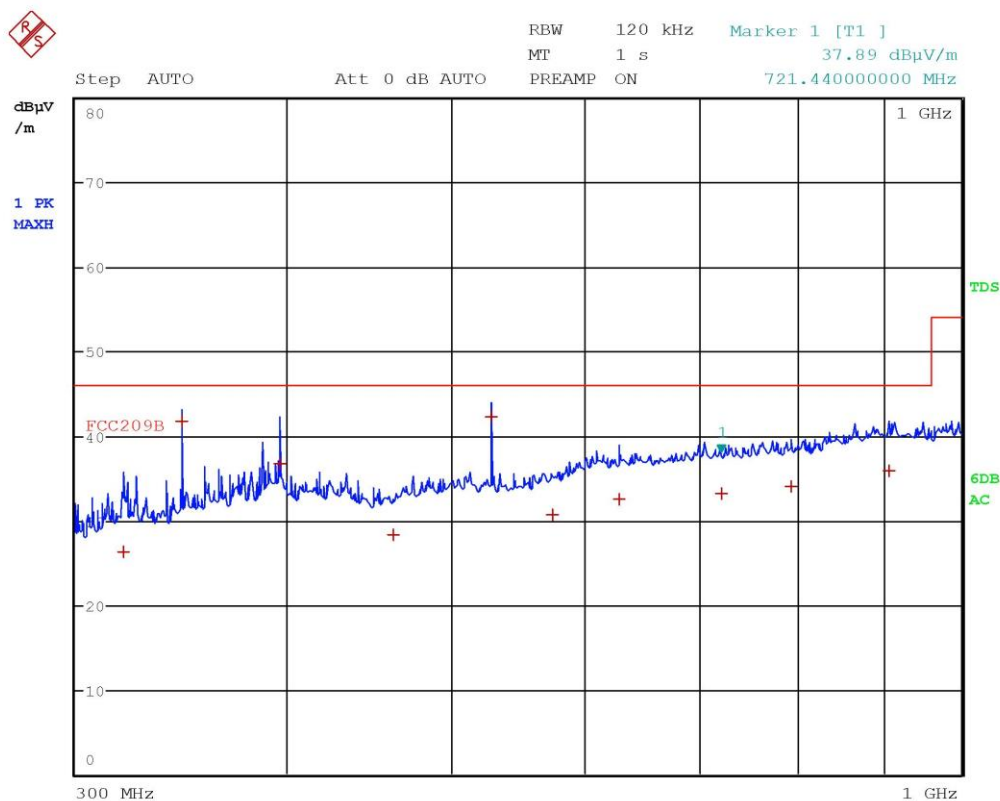


Panozzo 20003604 Vert



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	320.56 MHz	26.31	-19.70
1 Quasi Peak	346.48 MHz	41.77	-4.24
1 Quasi Peak	395.96 MHz	36.76	-9.25
1 Quasi Peak	462 MHz	28.24	-17.77
1 Quasi Peak	527.96 MHz	42.30	-3.71
1 Quasi Peak	573.64 MHz	30.73	-15.29
1 Quasi Peak	628.56 MHz	32.54	-13.47
1 Quasi Peak	721.44 MHz	33.24	-12.77
1 Quasi Peak	793.32 MHz	34.01	-12.00
1 Quasi Peak	906.24 MHz	35.82	-10.20

Panozzo 20003604 Vert

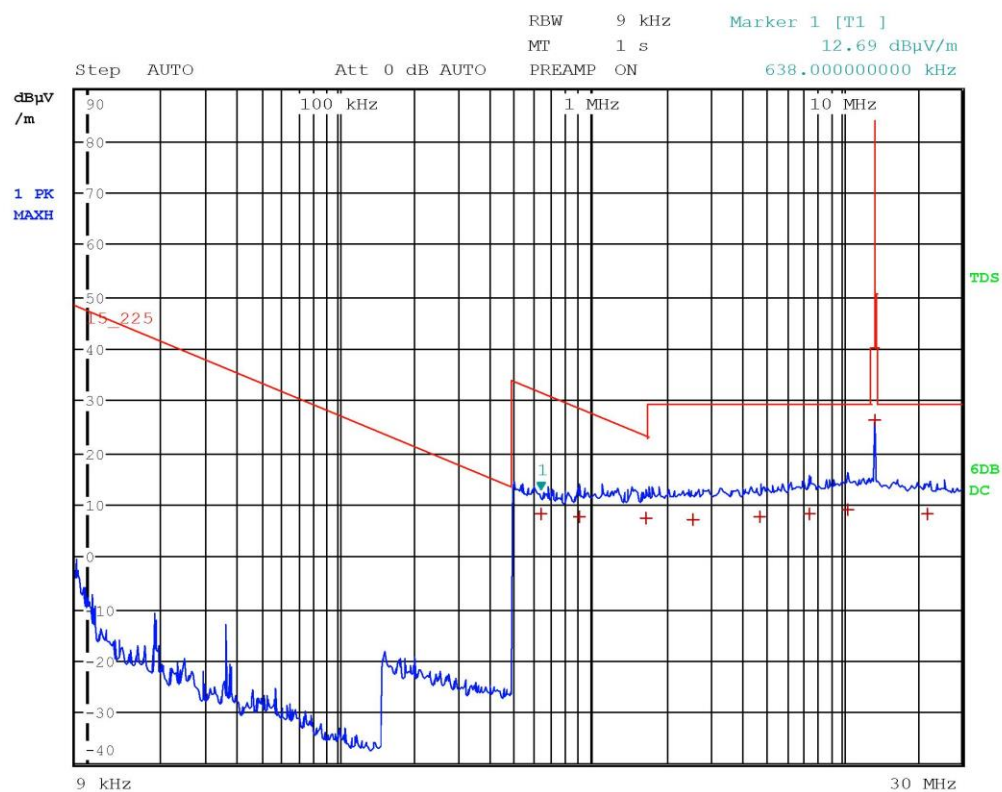

Panozzo 20003605 Loop



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	15_225		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	638 kHz	8.29	-23.21
1 Quasi Peak	906 kHz	7.67	-20.79
1 Quasi Peak	1.666 MHz	7.31	-15.85
1 Quasi Peak	2.574 MHz	7.21	-22.32
1 Quasi Peak	4.726 MHz	7.57	-21.96
1 Quasi Peak	7.47 MHz	8.25	-21.28
1 Quasi Peak	10.534 MHz	8.90	-20.63
1 Quasi Peak	13.562 MHz	26.21	-57.78
1 Quasi Peak	21.902 MHz	8.32	-21.21

Panozzo 20003605 Loop


9.4 Field strength with the assigned band

Tested by	C. Panozzo
Test date	12.10.2020
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 and 15.225 ANSI C63.10
Supplementary test set-up description	EUT – antenna distance: 10 m
Supplementary information.....	--

Acceptance limits

- The field strength of any emissions within the band 13,553 – 13,567 MHz shall not exceed 15,848 microvolts/meter at 30 meters
- Within the bands 13,410 – 13,553 MHz and 13,567 – 13,710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters
- Within the bands 13,110 – 13,410 MHz and 13,710 – 14,010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters
- The field strength of any emissions appearing outside of the 13,110 – 14,010 MHz band shall not exceed the general radiated emission limits in §15.209

Test setup

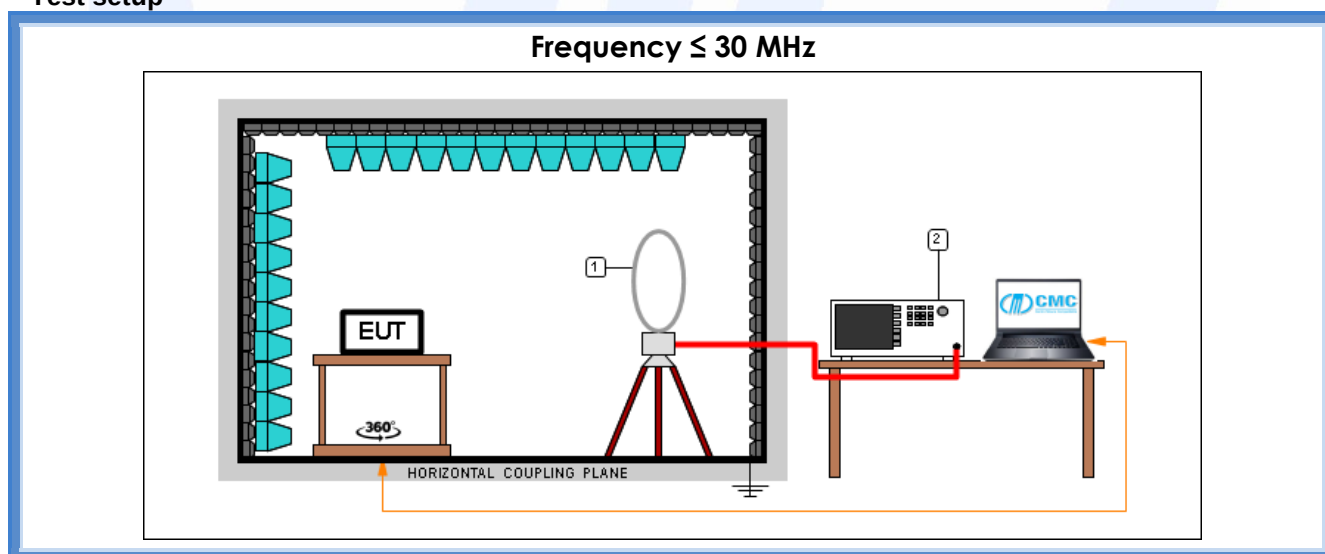

Test setup PE004_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz



Result


Frequency band (MHz)	Graphs	Measured level (dB μ V/m)	Limit (dB μ V/m)
13,553 – 13,567	G20003606	27,26	84,00

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.






Graphs

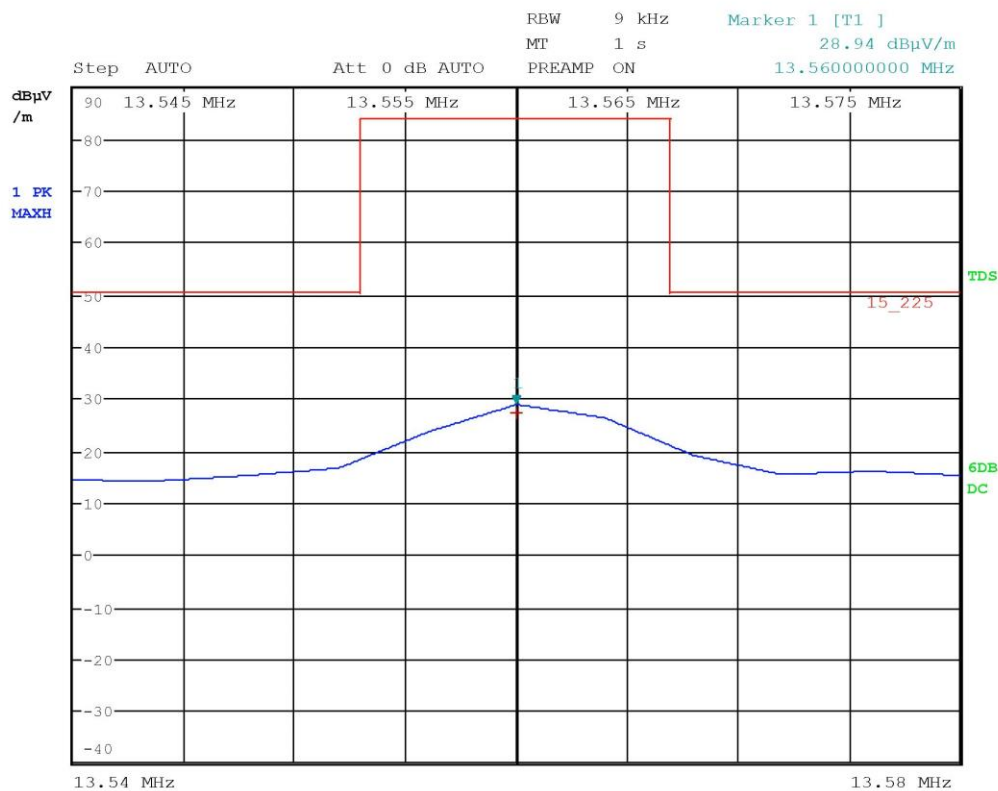

Panozzo 20003606



LAB N° 0168 L




9.5 Frequency tolerance

Tested by	C. Panozzo
Test date	15.10.2020
Test location (stand)	Climatic chamber (CMC B069)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.225 e) ANSI C63.10
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0,01\%$ of the operating frequency over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$. For battery operated equipment, the equipment tests shall be performed using a new battery

Test setup

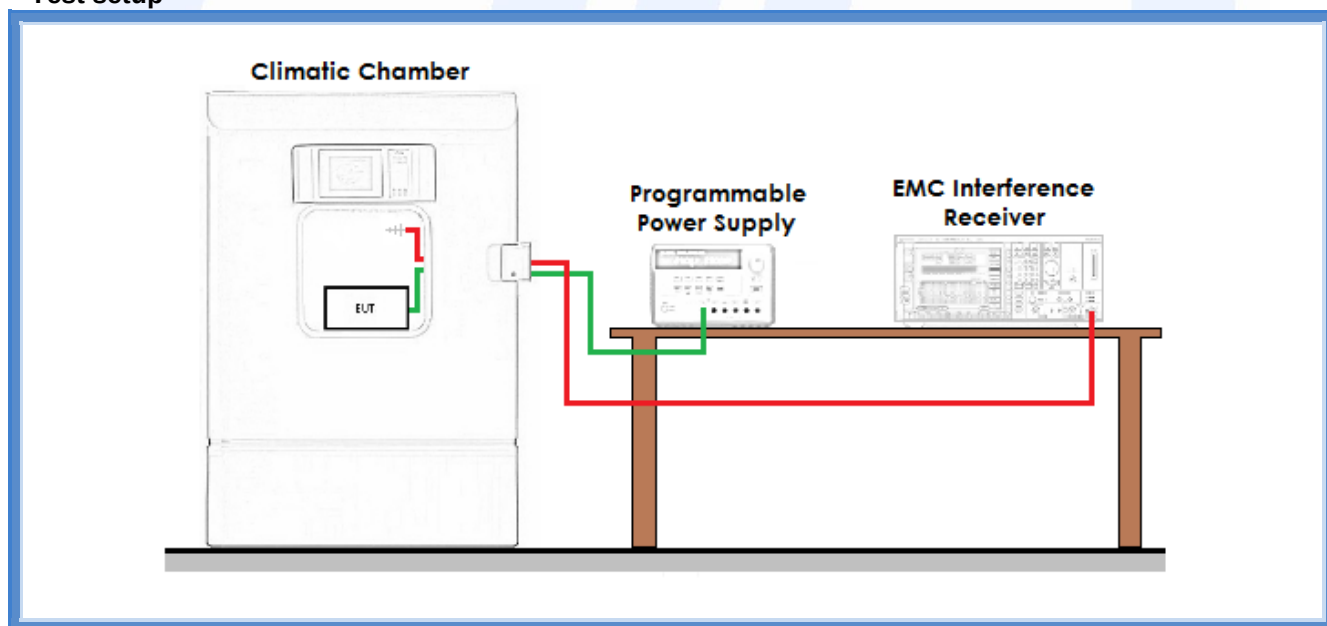

<i>Id. Number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
CMC B069	Angelantoni	CH 600C	Climatic chamber



Result

Test conditions		Measured frequency	Frequency limits
Temperature (°C)	Voltage level (V)	(MHz)	(MHz)
-20	Nominal supply voltage	13,560696	13,55864 – 13,56136
-10	Nominal supply voltage	13,560666	13,55864 – 13,56136
0	Nominal supply voltage	13,560633	13,55864 – 13,56136
10	Nominal supply voltage	13,560624	13,55864 – 13,56136
20	Nominal supply voltage	13,560650	13,55864 – 13,56136
30	Nominal supply voltage	13,560642	13,55864 – 13,56136
40	Nominal supply voltage	13,560602	13,55864 – 13,56136
50	Nominal supply voltage	13,560639	13,55864 – 13,56136

Test conditions			Measured frequency	Frequency limits
Temperature (°C)	Voltage level (%)	Voltage level (V)	(MHz)	(MHz)
20	85	20,4	13,560699	13,55864 – 13,56136
20	90	21,6	13,560698	13,55864 – 13,56136
20	95	22,8	13,560698	13,55864 – 13,56136
20	100	24	13,560696	13,55864 – 13,56136
20	105	25,2	13,560699	13,55864 – 13,56136
20	110	26,4	13,560699	13,55864 – 13,56136
20	115	27,6	13,560700	13,55864 – 13,56136




9.6 20 dB bandwidth

Tested by	C. Panozzo
Test date	06.05.2020
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.215 ANSI C63.10 cl. 7.8.7
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

Test setup

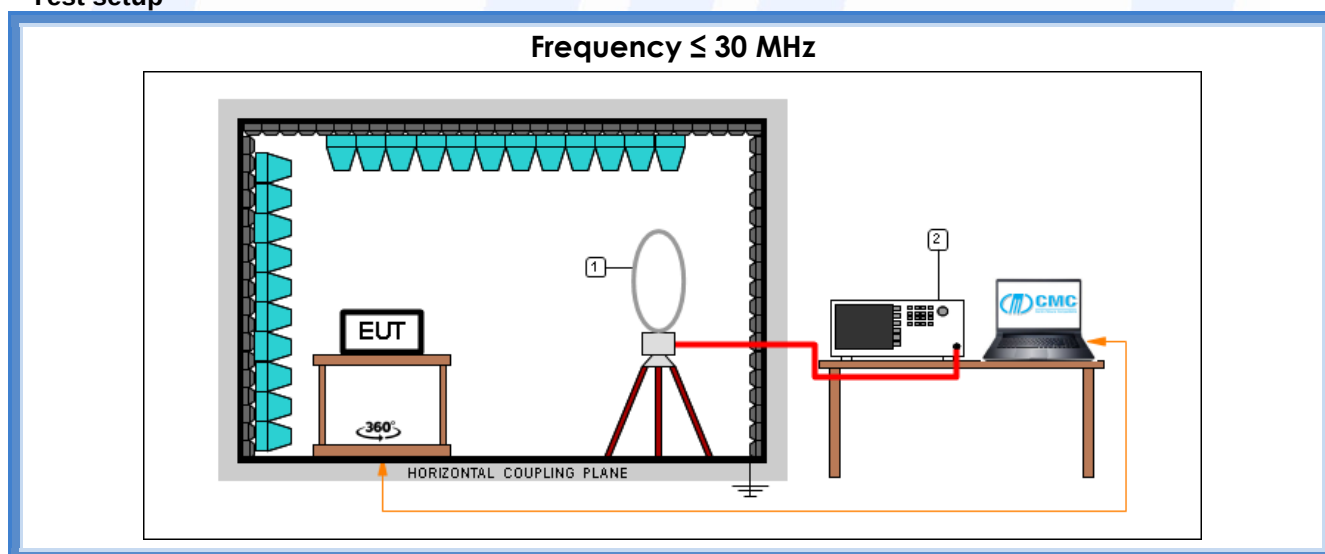


Test setup PE004_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Result


f (MHz)	20 dB bandwidth (MHz)		Graph	Results
	F_L	F_H		
13,56	13,560341	13,560884	G20003608	Complies
			G20003609	



Graphs

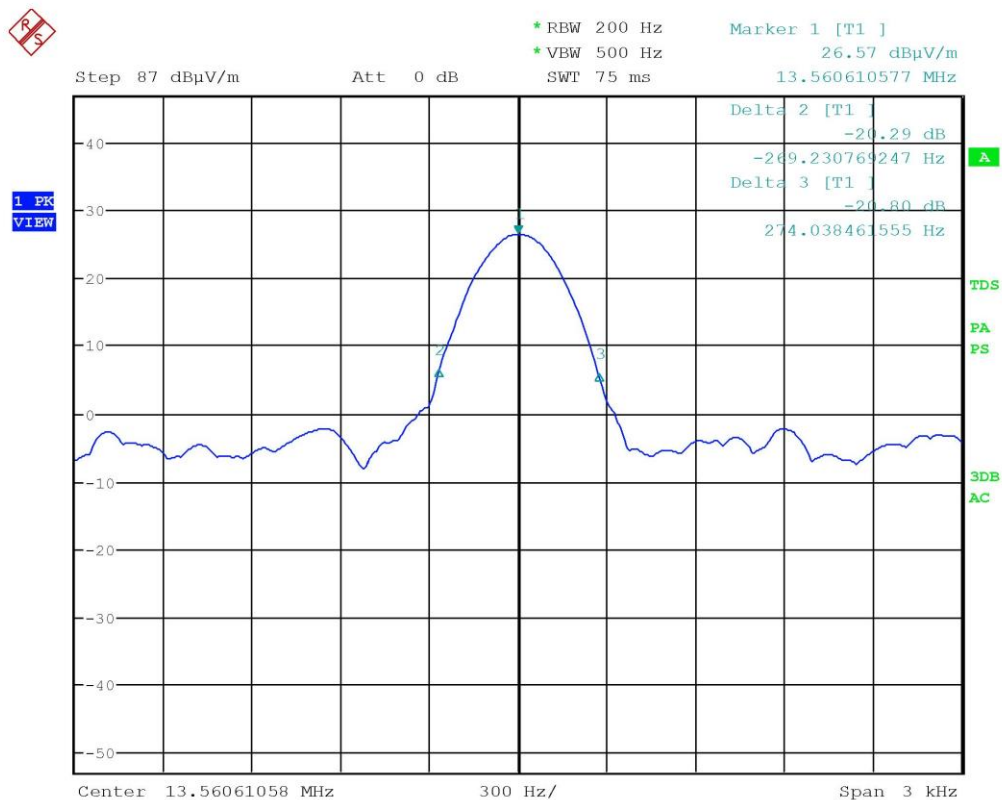

Panozzo 20003608

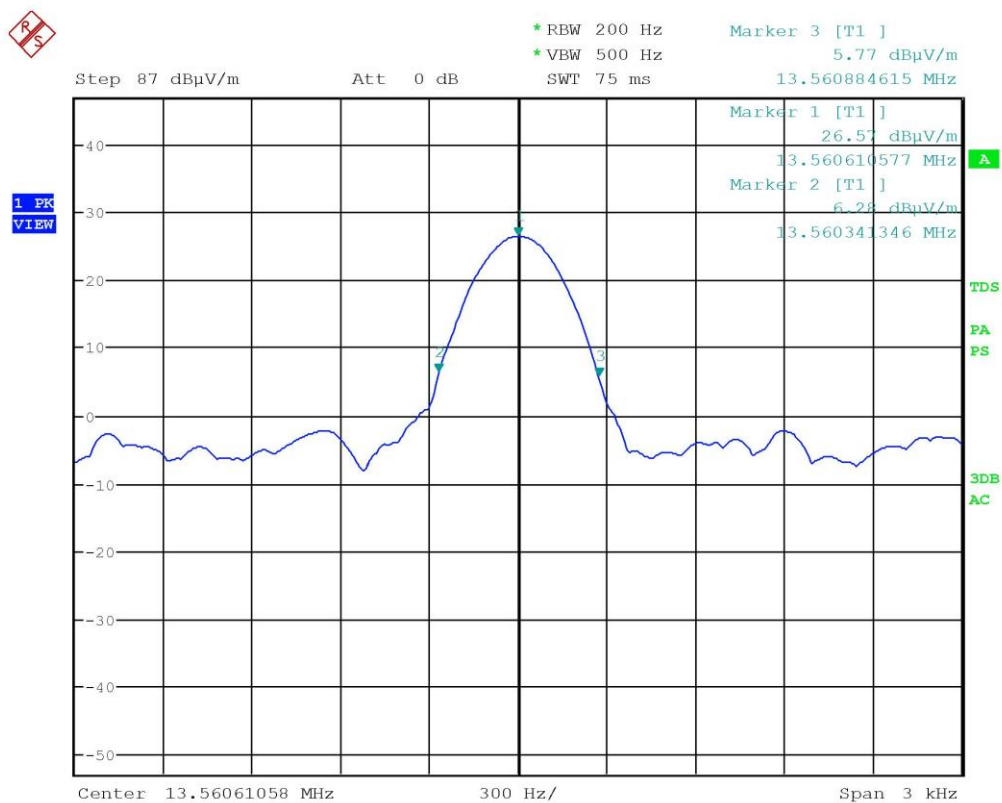

Panozzo 20003609



Attachment 1

Instruments list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '20	January '21
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '20	January '21
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '20	January '21
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '19	November '20
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '19	November '20
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '19	November '20
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '19	November '20
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '19	November '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '19	November '20
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22



Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05	2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06	3,3 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonics	PE006_01	10 mA + 2,6 %	1
Flicker	PE007_01	4,79 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	1,95 dB 0,75 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,20 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	$< 1 \times 10^{-7}$	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	$< 1 \times 10^{-7}$	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev. 20_02 date 24/02/2020			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of $p = 95\%$




Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k=2$



Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	 The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	 The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	 The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation