

FCC Radio Test Report

FCC ID: 2AX4E-Q10107L

Original Grant

Report No. : TB-FCC176114
Applicant : Vitek Electronics International Co., Ltd
Equipment Under Test (EUT)
EUT Name : 10.1inch Tablet PC
Model No. : Q10107L-ME
Series Model No. : VK1001G, VK1002G, VK1003G, VK1004G, VK1005G, VK1006G, VK1007G, VK1008G
Brand Name : AOC, VTEX
Sample ID : TBBJ-20200916-08-5#& TBBJ-20200916-08-6#
Receipt Date : 2020-09-14
Test Date : 2020-09-15 to 2020-11-17
Issue Date : 2020-11-18
Standards : 47 CFR Part 2, 22(H), 24(E)
Test Method : ANSI C63.26 2015
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer :

Jack Deng

Jack Deng

Engineer Supervisor :

IVAN SU

Ivan Su

Engineer Manager :

Ray Lai

Ray Lai

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	6
1.5 Description of Test Mode.....	7
1.6 Measurement Uncertainty	8
1.7 Test Facility.....	9
2. TEST SUMMARY.....	10
3. TEST EQUIPMENT.....	11
4. FREQUENCY STABILITY	12
4.1 Test Standard and Requirement	12
4.2 Test Setup.....	12
4.3 Test Procedure.....	13
4.4 EUT Operating Condition	13
4.5 Deviation From Test Standard.....	13
4.6 Test Data.....	13
5. CONDUCTED RF OUTPUT POWER.....	14
5.1 Test Standard and Limit.....	14
5.2 Test Setup.....	14
5.3 Test Procedure.....	14
5.4 EUT Operating Condition	14
5.5 Deviation From Test Standard.....	14
5.6 Test Data.....	14
6. PEAK-AVERAGE RATIO.....	15
6.1 Test Standard and Limit.....	15
6.2 Test Setup.....	15
6.3 Test Procedure.....	15
6.4 EUT Operating Condition	15
6.5 Deviation From Test Standard.....	15
6.6 Test Data.....	15
7. RADIATED OUTPUT POWER	16
7.1 Test Standard and Limit.....	16
7.2 Test Setup.....	16
7.3 Test Procedure.....	17
7.4 EUT Operating Condition	17
7.5 Deviation From Test Standard.....	17
7.6 Test Data.....	17

8.	OCCUPIED BANDWIDTH	18
8.1	Test Standard and Limit.....	18
8.2	Test Setup.....	18
8.3	Test Procedure.....	18
8.4	EUT Operating Condition	19
8.5	Deviation From Test Standard.....	19
8.6	Test Data.....	19
9.	CONDUCTED OUT OF BAND EMISSIONS.....	20
9.1	Test Standard and Limit.....	20
9.2	Test Setup.....	20
9.3	Test Procedure.....	20
9.4	EUT Operating Condition	20
9.5	Deviation From Test Standard.....	20
9.6	Test Data.....	20
10.	BAND EDGE TEST	21
10.1	Test Standard and Limit	21
10.2	Test Setup.....	21
10.3	Test Procedure.....	21
10.4	EUT Operating Condition	21
10.5	Deviation From Test Standard.....	21
10.6	Test Data.....	21
11.	RADIATED OUT BAND OF EMISSIONS.....	22
11.1	Test Standard and Limit	22
11.2	Test Setup.....	22
11.3	Test Procedure.....	22
11.4	EUT Operating Condition	23
11.5	Deviation From Test Standard.....	23
11.6	Test Data.....	23
	ATTACHMENT A--FREQUENCY STABILITY	24
	ATTACHMENT B--CONDUCTED RF OUTPUT POWER	27
	ATTACHMENT C--PEAK-AVERAGE RATIO	31
	ATTACHMENT D-- RADIATED OUTPUT POWER.....	36
	ATTACHMENT E--OCCUPIED BANDWIDTH.....	39
	ATTACHMENT F--CONDUCTED OUT OF BAND EMISSIONS.....	52
	ATTACHMENT G-- BAND EDGE TEST.....	76
	ATTACHMENT H--RADIATED OUT BAND OF EMISSIONS	80

Revision History

Report No.	Version	Description	Issued Date
TB-FCC176114	Rev.01	Initial issue of report	2020-11-18

1. General Information about EUT

1.1 Client Information

Applicant	:	Vitek Electronics International Co., Ltd
Address	:	Room 1104, 11/F., Witty Commercial Building, 1A-1L, Tung Choit St, Mong Kok, Kowloon, Hong Kong
Manufacturer	:	Vitek Electronics International Co., Ltd
Address	:	Room 1104, 11/F., Witty Commercial Building, 1A-1L, Tung Choit St, Mong Kok, Kowloon, Hong Kong


1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	10.1inch Tablet PC
Models No.	:	Q10107L-ME , VK1001G, VK1002G, VK1003G, VK1004G, VK1005G, VK1006G, VK1007G, VK1008G
Model Difference	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is appearance.
Product Description	:	GSM 850 Power : Cond:32.93dBm ERP:32.264dBm
		PCS 1900 Power : Cond:28.18dBm EIRP:26.98dBm
		UMTS Band II Power: Cond:22.04dBm EIRP:20.96dBm
		UMTS Band V Power: Cond:22.13dBm ERP:21.03dBm
		Antenna Gain: 2.1dB PIFA Antenna
		Modulation Type: GSM/GPRS:GMSK; EDGE: 8PSK UMTS:QPSK
FCC Operating Frequency	:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz UMTS Band II: 1852.40MHz-1907.60MHz UMTS Band V:826.40MHz-846.60MHz
Power Rating	:	Adapter(HTY15-0502000U) Input: AC 100-240V, 50/60Hz Output: DC 5V 2A DC 3.7V by 5000mAh Li-ion battery
Software Version	:	android 10.0 S107
Hardware Version	:	S706-9863A
Remark	:	The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3 Block Diagram Showing the Configuration of System Tested

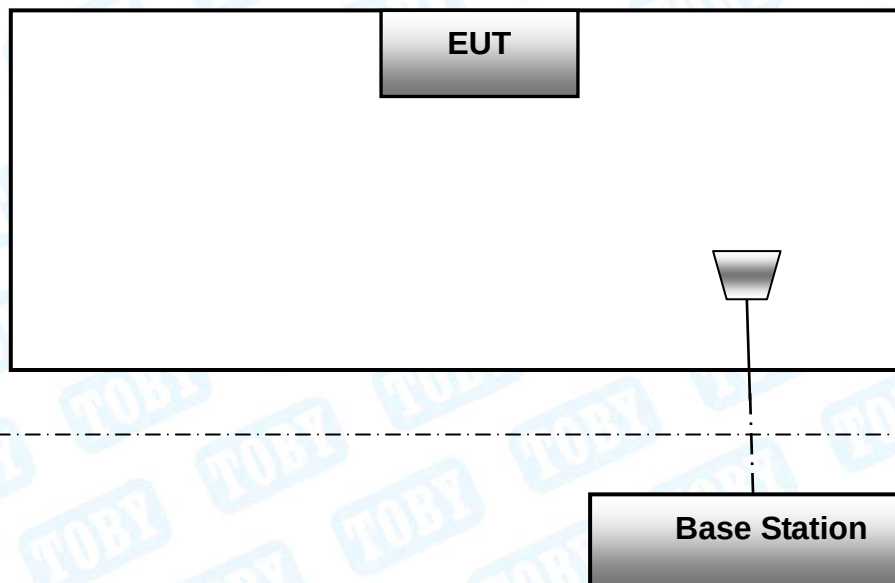

The above block diagram of setup is the normal mode. And more detail please refer to the test setup of each test item of bellow.

1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

During all testing, EUT is link mode with base station at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range. Frequency range investigated for radiated emission as below:

1. 9kHz~10GHz for GSM850 and UMTS Band V.
2. 9kHz~20GHz for PCS1900 and UMTS Band II.

Test Channel		
Mode	Channel	Frequency(MHz)
GSM 850	128	824.20
	190	836.60
	251	848.80
PCS 1900	512	1850.20
	661	1880.00
	810	1909.80
UMTS Band V	4132	826.40
	4183	836.60
	4233	846.60
UMTS Band II	9262	1852.40
	9400	1880.00
	9538	1907.60

Test Mode	Description
GSM 850	highest , middle, lowest channels
GPRS 850	highest , middle, lowest channels
EGPRS 850	highest , middle, lowest channels
GSM 1900	highest , middle, lowest channels
GPRS 1900	highest , middle, lowest channels
EGPRS 1900	highest , middle, lowest channels
RMC UMTS Band V	highest , middle, lowest channels
HSDPA UMTS Band V	highest , middle, lowest channels
HSUPA UMTS Band V	highest , middle, lowest channels
RMC UMTS Band II	highest , middle, lowest channels
HSDPA UMTS Band II	highest , middle, lowest channels
HSUPA UMTS Band II	highest , middle, lowest channels
For the Radiated test used the EUT-1(TBBJ-20200916-08-6#).	
For the RF Conduction test used the EUT-2(TBBJ-20200916-08-5#).	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the EUT is in link mode with base station emulator at maximum power level in each test mode.
- (3) The EUT has GSM, GPRS, EDGE functions, and after pre-testing, GSM function is the worst case for all the emission tests.
- (4) The EUT has RMC, HSDPA, HSUPA functions in UMTS band II and UMTS band V, and after pre-testing, RMC mode is the worst case for all the emission tests.
- (5) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on Z-plane as the normal use. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

1.6 Measurement Uncertainty

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.7 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

Test Standards and Test Results			
Standard	Document Title		
FCC Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations		
FCC Part 22 (10-1-05 Edition)	Public Mobile Services		
FCC Part 24 (10-1-05 Edition)	Personal Communications Services		
Standard Section	Test Item	Judgment	Remark
2.1046	Conducted RF Output Power	PASS	N/A
24.232(d)	Peak-Average Ratio	PASS	N/A
2.1049; 22.917; 24.238	99% & -26 dB Occupied Bandwidth	PASS	N/A
2.1055; 22.355; 24.235	Frequency Stability	PASS	N/A
2.1051; 2.1057; 22.917; 24.238	Conducted Out of Band Emissions	PASS	N/A
2.1051; 2.1057; 22.917; 24.238	Band Edge	PASS	N/A
22.913; 24.238	Transmitter Radiated Power (EIRP/ERP)	PASS	N/A
2.1053; 2.1057; 22.917; 24.238	Radiated Out of Band Emissions	PASS	N/A
Note: N/A is an abbreviation for Not Applicable.			

3. Test Equipment

Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Sep. 11, 2020	Sep. 10, 2021
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Mar.01, 2020	Feb. 28, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Sep. 11, 2020	Sep. 10, 2021
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

4. Frequency Stability

4.1 Test Standard and Requirement

4.1.1 Test Standard

FCC Part 2.1055

FCC Part 22.355

FCC Part 24.235

4.1.2 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

(1) Temperature:


The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .

(2) Primary Supply Voltage:


For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided.

4.2 Test Setup

For Temperature Test:

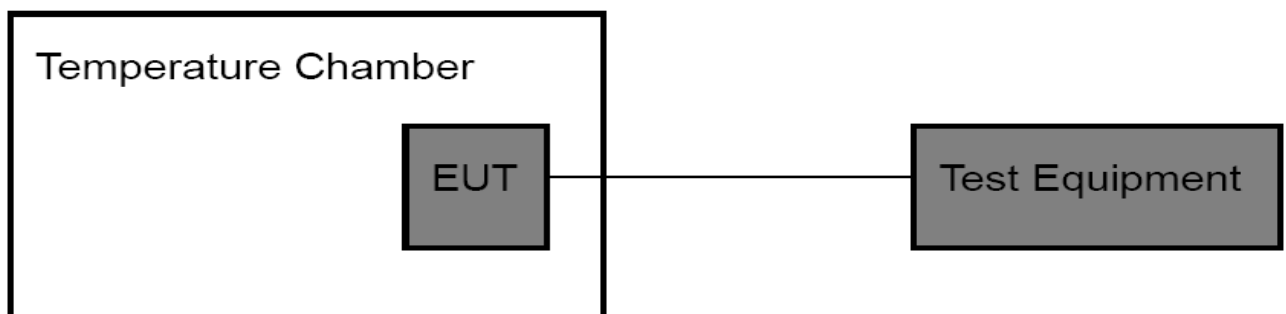

For Voltage Test:

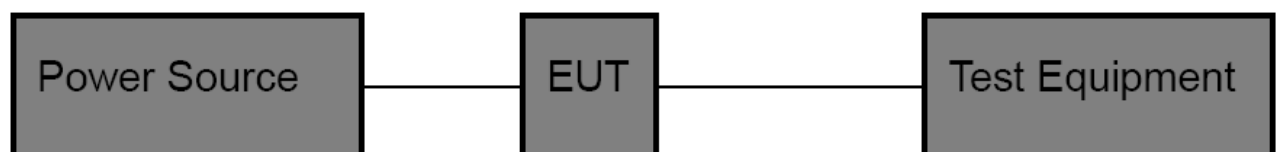

4.3 Test Procedure

Test Procedures for Temperature Variation:

- (1) The EUT was set up in the thermal chamber and connected with the base station.
- (2) With power off, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- (3) With power off, the temperature was raised in 10°C set up to 50°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- (4) If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

Test Procedures for Voltage Variation:

- (1) The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the base station.
- (2) Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.
- (3) The variation in frequency was measured for the worst case.

4.4 EUT Operating Condition

The Equipment Under Test was set to Communication with the Base Station.

4.5 Deviation From Test Standard

No deviation

4.6 Test Data

Please refer to the Attachment A.

5. Conducted RF Output Power

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 2: 2.1046


FCC Part 22H : 22.913 (a)

FCC Part 24E: 24.232 (c)

5.1.2 Test Limit

GSM850/UMTS Band V	PCS 1900/UMTS Band II
38.5 dBm (ERP)	33 dBm (EIRP)

5.2 Test Setup

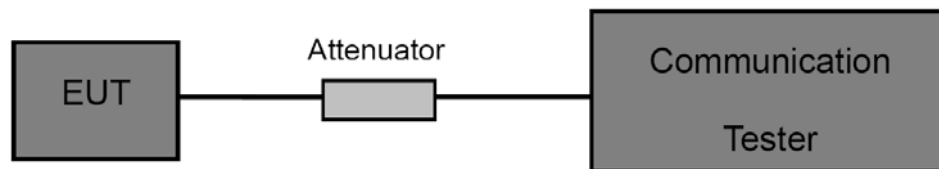

5.3 Test Procedure

- (1) The EUT is coupled to the Base Station with the suitable Attenuator, the path loss is calibrated to correct the reading.
- (2) A call is set up by the Base Station to the generic call set up procedure.
- (3) Set EUT at maximum power level through base station by power level command.
- (4) Then read record the power value from the Base Station in dBm.

5.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

5.5 Deviation From Test Standard

No deviation

5.6 Test Data

Please refer to the Attachment B.

6. Peak-Average Ratio

6.1 Test Standard and Limit

6.1.1 Test Standard


FCC Part 24E: 24.232 (d)

6.1.2 Test Limit

Peak-to-Average Ratio

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.2 Test Setup

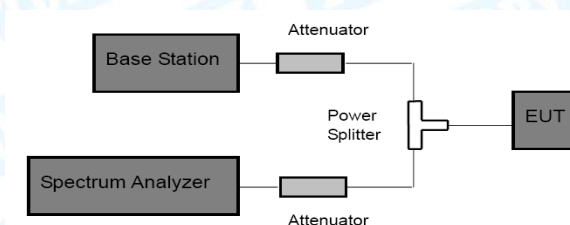

6.3 Test Procedure

According with KDB 971168

- (1) The signal analyzer's CCDF measurement profile is enabled.
- (2) Frequency = carrier center frequency.
- (3) Measurement BW > Emission bandwidth of signal.
- (4) The signal analyzer was set to collect one million samples to generate the CCDF curve.
- (5) The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which of the transmitter is operating at maximum power.

6.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

6.5 Deviation From Test Standard

No deviation

6.6 Test Data

Please refer to the Attachment C.

7. Radiated Output Power

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 22H: 22.913 (a)

FCC Part 24E: 24.232 (c)


7.1.2 Test Limit

According to FCC Part 22.913 (a), the ERP of Cellular mobile transmitters must not exceed 7 Watts(38.5 dBm).


According to FCC Part 24.232 (c), the Mobile/portable stations are limited to 2 Watts(33 dBm) EIRP peak power.

Cellular Band		PCS Band	
GSM 850	UMTS Band V	PCS 1900	UMTS Band II
38.5 dBm (ERP)		33 dBm (EIRP)	

7.2 Test Setup

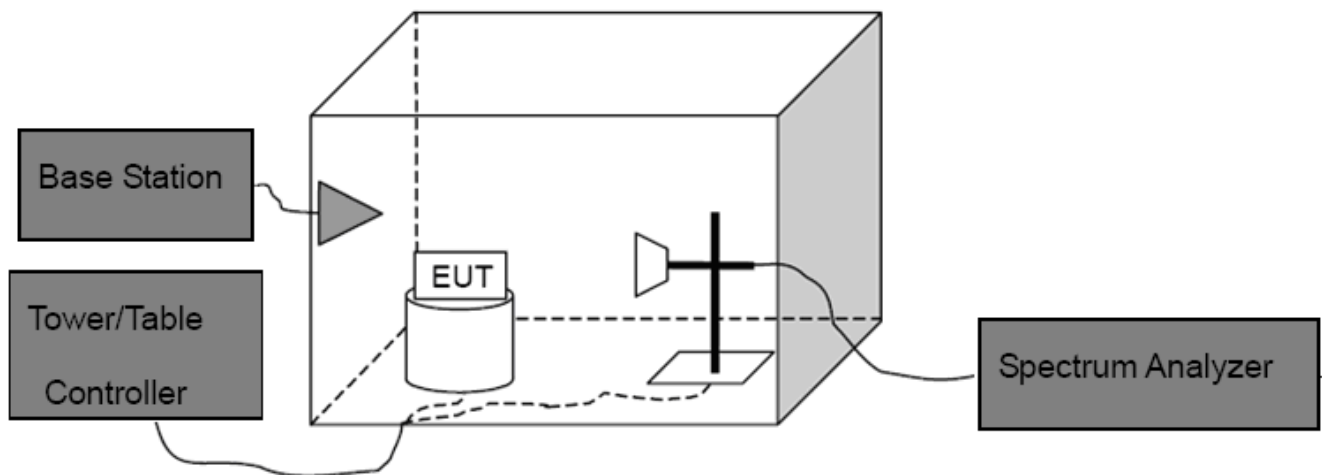

Above 1G

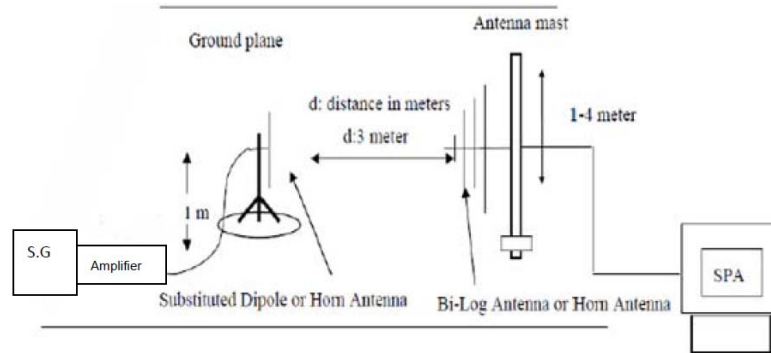

Substituted Method

7.3 Test Procedure

- (1) The EUT was placed on a non-conductive rotating platform with 0.8 meter height in an anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW=3 MHz, VBW=3 MHz and peak detector settings.
- (2) During the measurement, the EUT was enforced in maximum power and linked with the Base Station. The highest was recorded from analyzer power level (LVT) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- (3) Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to C63.26. The EUT was replaced by dipole antenna (for frequency below 1 GHz) or Horn antenna (for frequency above 1 GHz) at same location with same polarize of receiver antenna and then a known power of each measure frequency from S.G. was applied into the dipole antenna or Horn antenna through a TX cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.

Note: In test, the S.G. Connect the Pre-amplifier(Sonoma 310N Pre-amplifier for frequency below 1 GHz, HP 8449B Pre-amplifier for frequency above 1 GHz)

Then the EUT's EIRP and ERP was calculated with the correction factor:

$$\text{ERP} = \text{S.G. Level} + \text{Antenna Gain Cord. (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. Level} + \text{Antenna Gain Cord. (dBi)} - \text{Cable Loss (dB)}$$

7.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

7.5 Deviation From Test Standard

No deviation

7.6 Test Data

Please refer to the Attachment D.

8. Occupied Bandwidth

8.1 Test Standard and Limit

8.1.1 Test Standard

FCC Part 2: 2.1049

FCC Part 22H : 22.913 (a)


FCC Part 24E: 24.232 (c)

8.1.2 Test Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as 99% power and -26dB occupied bandwidths.

8.2 Test Setup

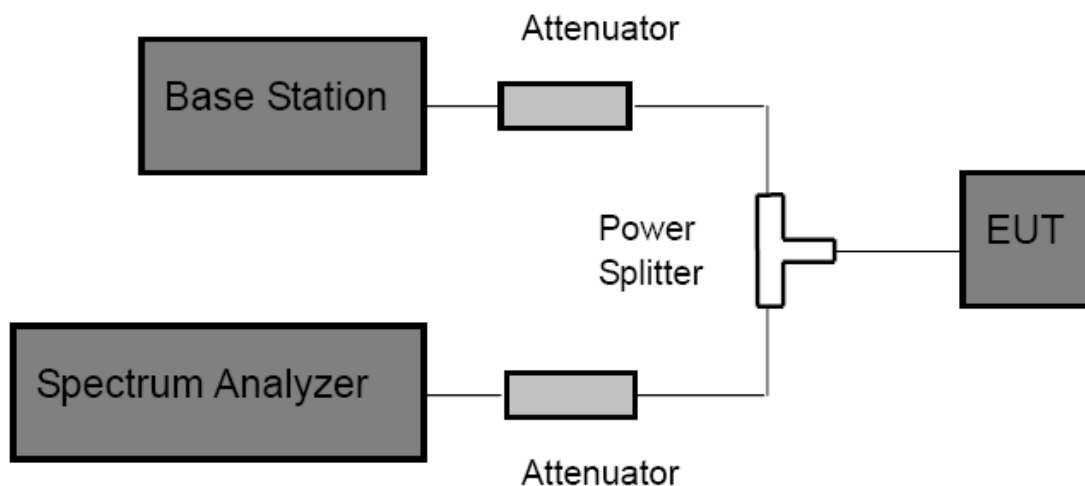

8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
- (2) The resolution bandwidth of the Spectrum Analyzer is set to at least 1% of the occupied bandwidth.
- (3) The low, middle and the high channels are selected to perform tests respectively.
- (4) Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 26dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.
- (5) Set the Spectrum Analyzer Occupied bandwidth function to measure the 99% occupied bandwidth.

8.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

8.5 Deviation From Test Standard

No deviation

8.6 Test Data

Please refer to the Attachment E.

9. Conducted Out of Band Emissions

9.1 Test Standard and Limit

9.1.1 Test Standard

FCC Part 2: 2.1051, 2.1057


FCC Part 22H: 22.917(a)

FCC Part 24E: 24.238(a)

9.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

9.2 Test Setup

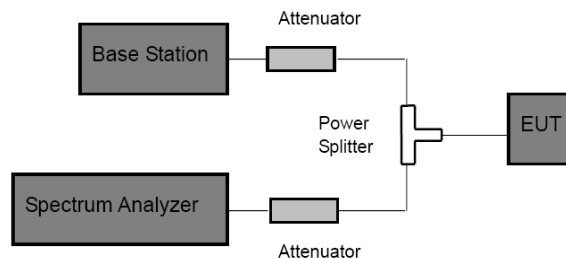

9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
- (2) Spectrum Setting:
Frequency bellow 1 GHz: RBW=100 kHz, VBW=300 kHz.
Frequency above 1 GHz: RBW=1 MHz, VBW=3 MHz.
- (3) The low, middle and high channels of each band and mode's spurious emissions for 30 MHz to 10th Harmonic were measured by Spectrum analyzer.

9.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

9.5 Deviation From Test Standard

No deviation

9.6 Test Data

Please refer to the Attachment F.

10. Band Edge Test

10.1 Test Standard and Limit

10.1.1 Test Standard

FCC Part 2: 2.1051, 2.1057


FCC Part 22H: 22.917(a)

FCC Part 24E: 24.238(a)

10.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

10.2 Test Setup

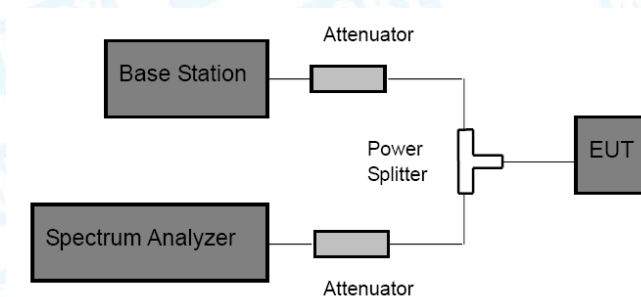

10.3 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.

(2) Spectrum Setting:

GSM and PCS: $RBW \geq 1\%$ 26db bandwidth, VBW=3 RBW, Span 1 MHz, Detector: Peak Mode.

WCDMA: $RBW \geq 1\%$ 26db bandwidth, VBW=3 RBW, Span 10 MHz, Detector: Peak Mode.

(3) The band edges of low and high channels for the highest RF powers were measured.

10.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

10.5 Deviation From Test Standard

No deviation

10.6 Test Data

Please refer to the Attachment G.

11. Radiated Out Band of Emissions

11.1 Test Standard and Limit

11.1.1 Test Standard

FCC Part 2: 2.1053, 2.1057


FCC Part 22H: 22.917

FCC Part 24E: 24.238

11.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

11.2 Test Setup

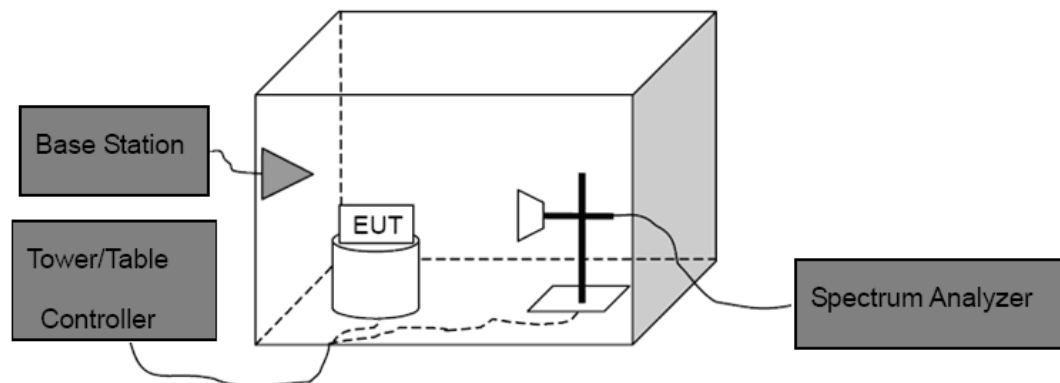

11.3 Test Procedure

- (1) The test system setup as show in the block diagram above.
- (2) The EUT was placed on an non-conductive rotating platform in an anechoic chamber. The radiated spurious emissions from 30MHz to 10th harmonious of fundamental frequency were measured at 3 m with a test antenna and a spectrum analyzer with RBW=1 MHz, VBW=1 MHz, peak detector settings.
- (3) During the measurement, the EUT was enforced in maximum power and linked with a base station. All the spurious emissions at 3m were measured by rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- (4) When found the maximum level of emissions from the EUT. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB=10 log(TX power in Watts/0.001)-the absolute level

Spurious attenuation limit in dB=43+10 log(power out in Watts)

11.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

11.5 Deviation From Test Standard

No deviation

11.6 Test Data

Please refer to the Attachment H.

Attachment A--Frequency Stability

Temperature Variation

Temperature Variation GSM 850 (CH190)						
Temperature (°C)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
-30	10	0.012	10	0.012	12	0.014
-20	9	0.011	9	0.011	11	0.013
-10	10	0.012	11	0.013	14	0.017
0	18	0.022	12	0.014	13	0.016
10	11	0.013	13	0.016	15	0.018
20	12	0.014	10	0.012	13	0.016
30	12	0.014	12	0.014	11	0.013
40	9	0.011	14	0.017	15	0.018
50	13	0.016	11	0.013	11	0.013
60	14	0.017	10	0.012	14	0.017
Limit	2.5 (ppm)					
Result	PASS					

Temperature Variation GSM 1900 (CH661)						
Temperature (°C)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
-30	13	0.020	17	0.026	20	0.030
-20	16	0.024	15	0.023	19	0.029
-10	14	0.021	13	0.020	21	0.032
0	17	0.026	16	0.024	15	0.023
10	18	0.027	13	0.020	16	0.024
20	16	0.024	14	0.021	17	0.026
30	15	0.023	16	0.024	15	0.023
40	14	0.021	14	0.021	14	0.021
50	13	0.020	13	0.020	16	0.024
60	12	0.018	12	0.018	17	0.026
Limit	2.5 (ppm)					
Result	PASS					

Temperature Variation UMTS Band V (CH 4183)		
Temperature (°C)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
-30	13	0.016
-20	22	0.026
-10	18	0.022
0	19	0.023
10	17	0.020
20	15	0.018
30	9	0.011
40	13	0.016
50	16	0.019
60	12	0.014
Limit	2.5 (ppm)	
Result	PASS	

Temperature Variation UMTS Band II (CH 9400)		
Temperature (°C)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
-30	8	0.004
-20	9	0.005
-10	6	0.003
0	13	0.007
10	7	0.004
20	5	0.003
30	6	0.003
40	9	0.005
50	8	0.004
60	12	0.006
Limit	2.5 (ppm)	
Result	PASS	

Voltage Variation

Voltage Variation GSM 850 (CH190)						
Voltage (V)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
3.50	16	0.019	15	0.018	12	0.014
3.70	10	0.012	13	0.016	11	0.013
4.20	14	0.017	16	0.019	14	0.017
Limit	2.5 (ppm)					
Result	PASS					

Voltage Variation GSM 1900 (CH661)						
Voltage (V)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
3.50	16	0.024	13	0.020	15	0.023
3.70	14	0.021	12	0.018	13	0.020
4.20	15	0.023	17	0.026	16	0.024
Limit	2.5 (ppm)					
Result	PASS					

Voltage Variation UMTS Band V (CH 4182)		
Voltage (V)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
3.50	12	0.014
3.70	13	0.016
4.20	15	0.018
Limit	2.5 (ppm)	
Result	PASS	

Voltage Variation UMTS Band II (CH 9400)		
Voltage (V)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
3.50	14	0.007
3.70	16	0.009
4.20	12	0.006
Limit	2.5 (ppm)	
Result	PASS	

Attachment B--Conducted RF Output Power

GSM 850				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM 850	128	824.2	32.03	1.596
	190	836.6	32.93	1.963
	251	848.8	31.80	1.514
GPRS 850 (1 Slot)	128	824.2	28.13	0.650
	190	836.6	28.16	0.655
	251	848.8	28.14	0.652
GPRS 850 (2 Slot)	128	824.2	27.69	0.587
	190	836.6	27.85	0.610
	251	848.8	27.65	0.582
GPRS 850 (3 Slot)	128	824.2	27.13	0.516
	190	836.6	27.43	0.553
	251	848.8	27.03	0.505
GPRS 850 (4 Slot)	128	824.2	26.67	0.465
	190	836.6	26.47	0.444
	251	848.8	26.58	0.455
EDGE 850 (1 Slot)	128	824.2	25.96	0.394
	190	836.6	26.38	0.435
	251	848.8	26.22	0.419
EDGE 850 (2 Slot)	128	824.2	25.23	0.333
	190	836.6	25.63	0.366
	251	848.8	25.74	0.375
EDGE 850 (3 Slot)	128	824.2	24.54	0.284
	190	836.6	24.76	0.299
	251	848.8	24.82	0.303
EDGE 850 (4 Slot)	128	824.2	23.63	0.231
	190	836.6	23.84	0.242
	251	848.8	23.41	0.219

PCS 1900				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM 1900	512	1850.2	27.88	0.614
	661	1880.0	27.95	0.624
	810	1909.8	28.18	0.658
GPRS 1900 (1 Slot)	512	1850.2	27.87	0.612
	661	1880.0	27.95	0.624
	810	1909.8	28.17	0.656
GPRS 1900 (2 Slot)	512	1850.2	27.32	0.540
	661	1880.0	27.61	0.577
	810	1909.8	27.56	0.570
GPRS 1900 (3 Slot)	512	1850.2	26.45	0.442
	661	1880.0	26.49	0.446
	810	1909.8	26.53	0.450
GPRS 1900 (4 Slot)	512	1850.2	25.54	0.358
	661	1880.0	25.75	0.376
	810	1909.8	25.73	0.374
EDGE 1900 (1 Slot)	512	1850.2	25.20	0.331
	661	1880.0	25.28	0.337
	810	1909.8	25.37	0.344
EDGE 1900 (2 Slot)	512	1850.2	24.75	0.299
	661	1880.0	24.64	0.291
	810	1909.8	24.64	0.291
EDGE 1900 (3 Slot)	512	1850.2	23.52	0.225
	661	1880.0	23.58	0.228
	810	1909.8	23.54	0.226
EDGE 1900 (4 Slot)	512	1850.2	22.85	0.193
	661	1880.0	22.78	0.190
	810	1909.8	22.38	0.173


UMTS Band V				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
Band V RMC	4132	826.4	21.41	0.138
	4183	836.6	21.42	0.139
	4233	846.6	21.37	0.137
HSDPA Subtest 1	4132	826.4	21.82	0.152
	4183	836.6	21.43	0.139
	4233	846.6	21.97	0.157
HSDPA Subtest 2	4132	826.4	21.04	0.127
	4183	836.6	21.04	0.127
	4233	846.6	21.63	0.146
HSDPA Subtest 3	4132	826.4	20.53	0.113
	4183	836.6	20.34	0.108
	4233	846.6	20.67	0.117
HSDPA Subtest 4	4132	826.4	20.19	0.104
	4183	836.6	20.26	0.106
	4233	846.6	20.23	0.105
HSUPA Subtest 1	4132	826.4	21.7	0.148
	4183	836.6	21.37	0.137
	4233	846.6	22.13	0.163
HSUPA Subtest 2	4132	826.4	20.93	0.124
	4183	836.6	20.75	0.119
	4233	846.6	20.66	0.116
HSUPA Subtest 3	4132	826.4	20.45	0.111
	4183	836.6	20.35	0.108
	4233	846.6	20.39	0.109
HSUPA Subtest 4	4132	826.4	20.09	0.102
	4183	836.6	20.15	0.104
	4233	846.6	20.12	0.103
HSUPA Subtest 5	4132	826.4	19.58	0.091
	4183	836.6	19.73	0.094
	4233	846.6	19.56	0.090



UMTS Band II				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
Band II RMC	9262	1852.4	21.52	0.142
	9400	1880.0	21.77	0.150
	9538	1907.6	22.04	0.160
HSDPA Subtest 1	9262	1852.4	21.31	0.135
	9400	1880.0	21.73	0.149
	9538	1907.6	21.63	0.146
HSDPA Subtest 2	9262	1852.4	21.04	0.127
	9400	1880.0	21.13	0.130
	9538	1907.6	21.34	0.136
HSDPA Subtest 3	9262	1852.4	20.53	0.113
	9400	1880.0	20.46	0.111
	9538	1907.6	20.64	0.116
HSDPA Subtest 4	9262	1852.4	20.13	0.103
	9400	1880.0	20.07	0.102
	9538	1907.6	20.17	0.104
HSUPA Subtest 1	9262	1852.4	21.19	0.132
	9400	1880.0	21.71	0.148
	9538	1907.6	21.62	0.145
HSUPA Subtest 2	9262	1852.4	20.98	0.125
	9400	1880.0	20.87	0.122
	9538	1907.6	20.85	0.122
HSUPA Subtest 3	9262	1852.4	20.73	0.118
	9400	1880.0	20.45	0.111
	9538	1907.6	20.65	0.116
HSUPA Subtest 4	9262	1852.4	20.12	0.103
	9400	1880.0	20.09	0.102
	9538	1907.6	20.24	0.106
HSUPA Subtest 5	9262	1852.4	19.54	0.090
	9400	1880.0	19.78	0.095
	9538	1907.6	19.67	0.093

Attachment C--Peak-Average Ratio


Mode	Channel	Frequency (MHz)	Peak Power (dBm)	AVG Power (dBm)	PAPR (dB)	Limit (dB)	Result
GSM 850	128	824.2	32.05	32.03	0.02	13	PASS
	190	836.6	32.95	32.93	0.02	13	PASS
	251	848.8	31.84	31.8	0.04	13	PASS
GPRS 850	128	824.2	28.15	28.13	0.02	13	PASS
	190	836.6	28.19	28.16	0.03	13	PASS
	251	848.8	28.16	28.14	0.02	13	PASS
EGPRS 850	128	824.2	28.99	25.96	3.03	13	PASS
	190	836.6	29.46	26.38	3.08	13	PASS
	251	848.8	29.42	26.22	3.20	13	PASS
PCS 1900	512	1850.2	27.92	27.88	0.04	13	PASS
	661	1880.0	27.98	27.95	0.03	13	PASS
	810	1909.8	28.22	28.18	0.04	13	PASS
GPRS 1900	512	1850.2	27.91	27.87	0.04	13	PASS
	661	1880.0	27.98	27.95	0.03	13	PASS
	810	1909.8	28.19	28.17	0.02	13	PASS
EGPRS 1900	512	1850.2	28.53	25.2	3.33	13	PASS
	661	1880.0	28.42	25.28	3.14	13	PASS
	810	1909.8	28.68	25.37	3.31	13	PASS



UMTS Band V			
Mode	Channel	Frequency (MHz)	PAPR with 0.1% probability (dB)
UMTS Band V	4132	826.4	3.30
	4183	836.6	3.71
	4233	846.6	3.28
Limit ≤ 13dB			

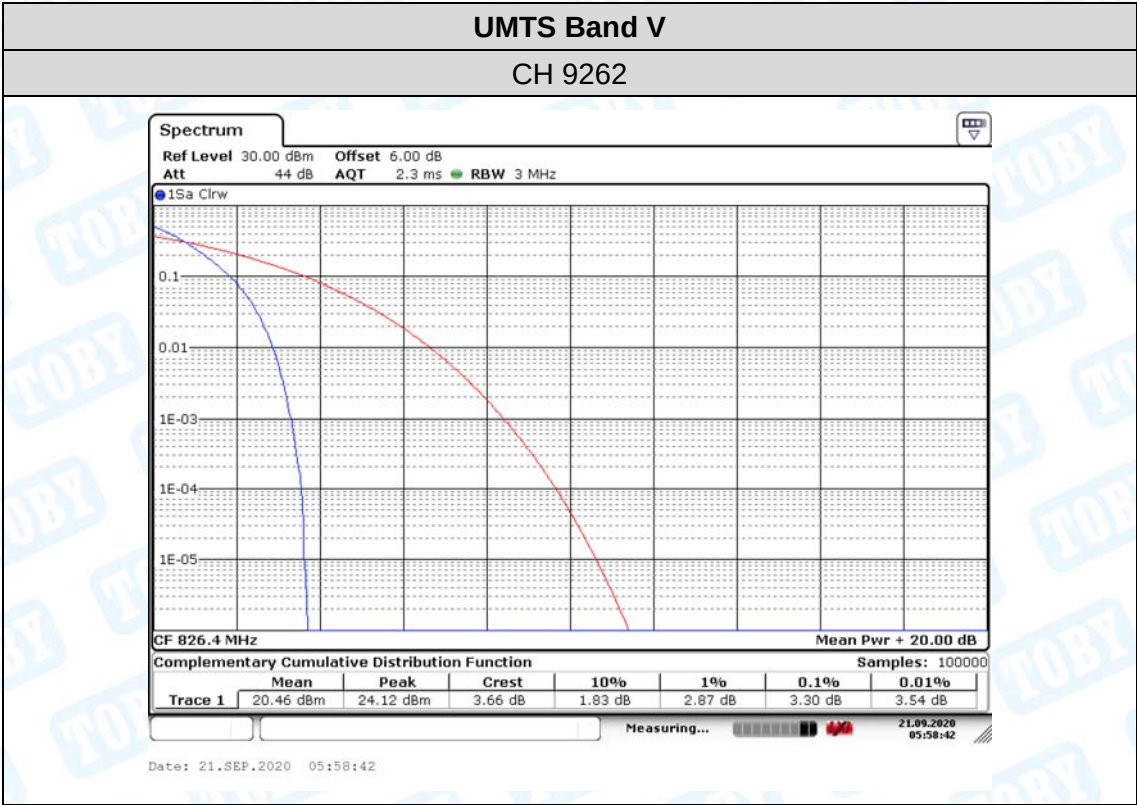

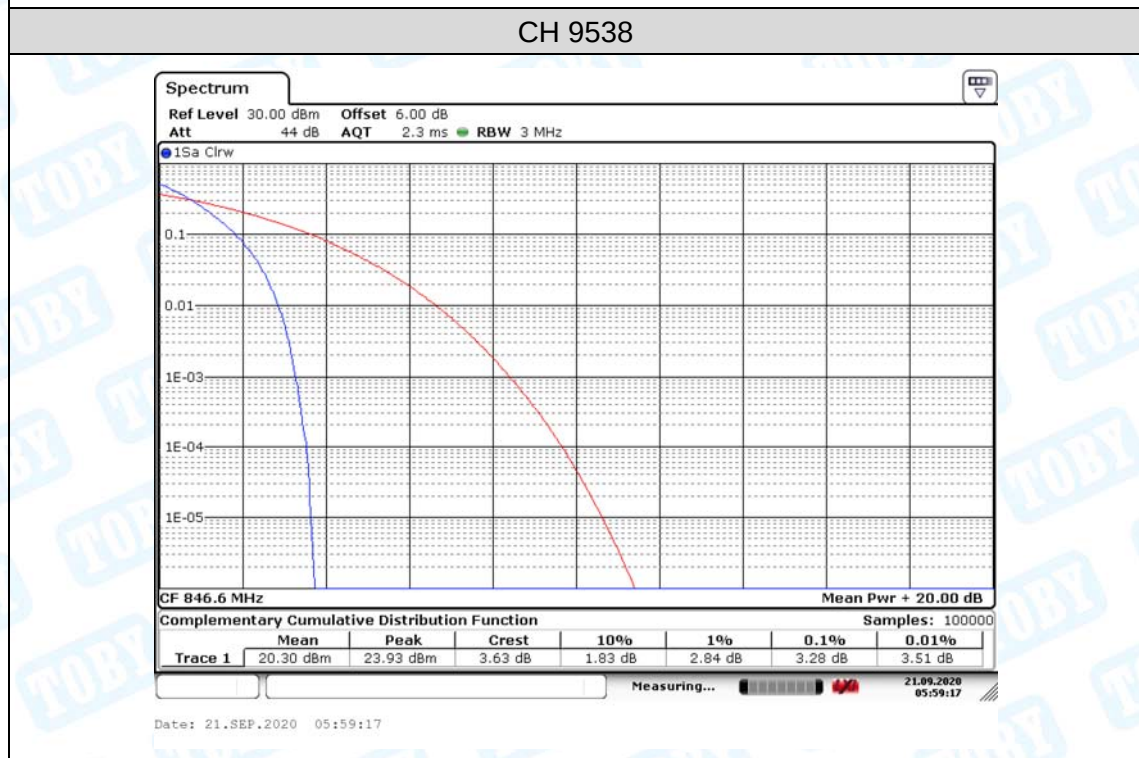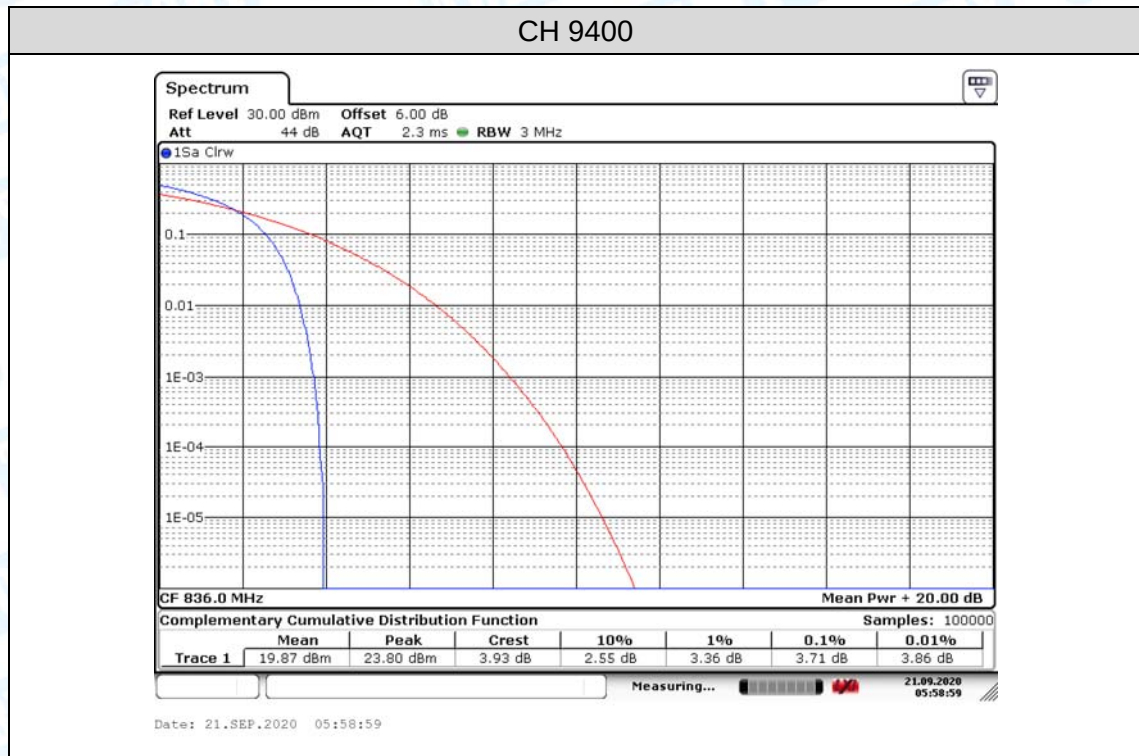

UMTS Band II			
Mode	Channel	Frequency (MHz)	PAPR with 0.1% probability (dB))
UMTS Band II	9262	1852.4	3.36
	9400	1880.0	3.13
	9538	1907.6	3.07
Limit ≤ 13dB			

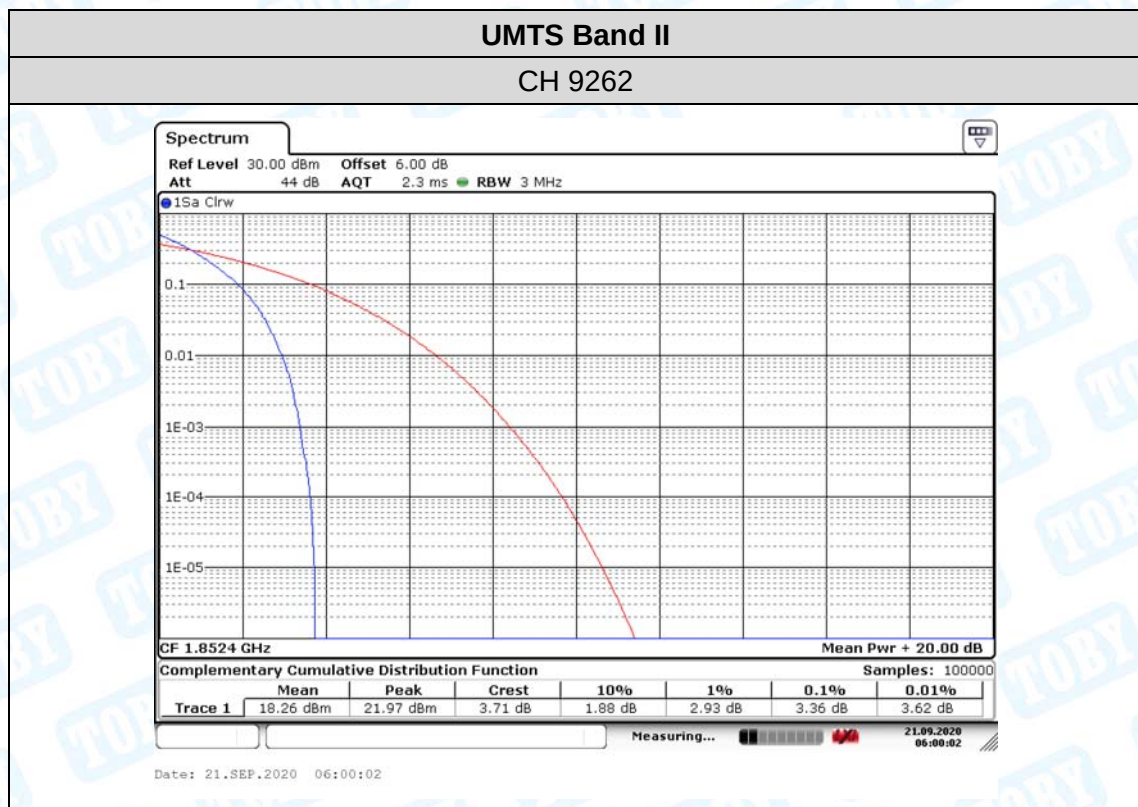

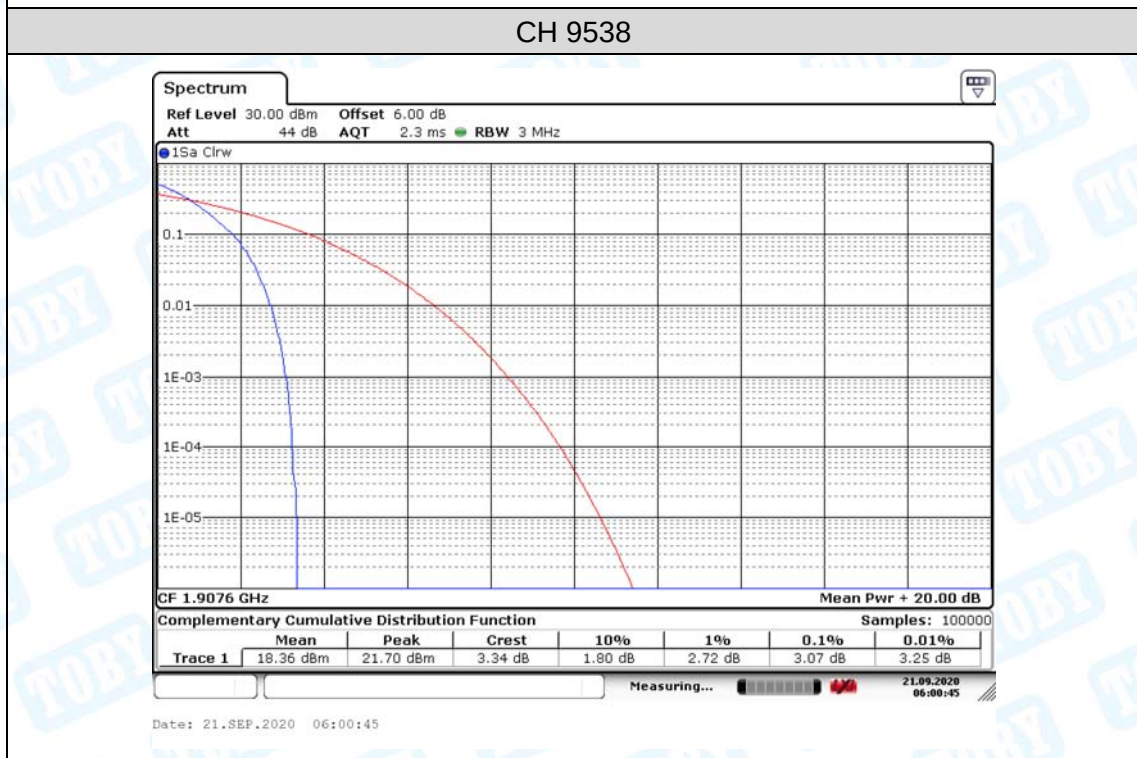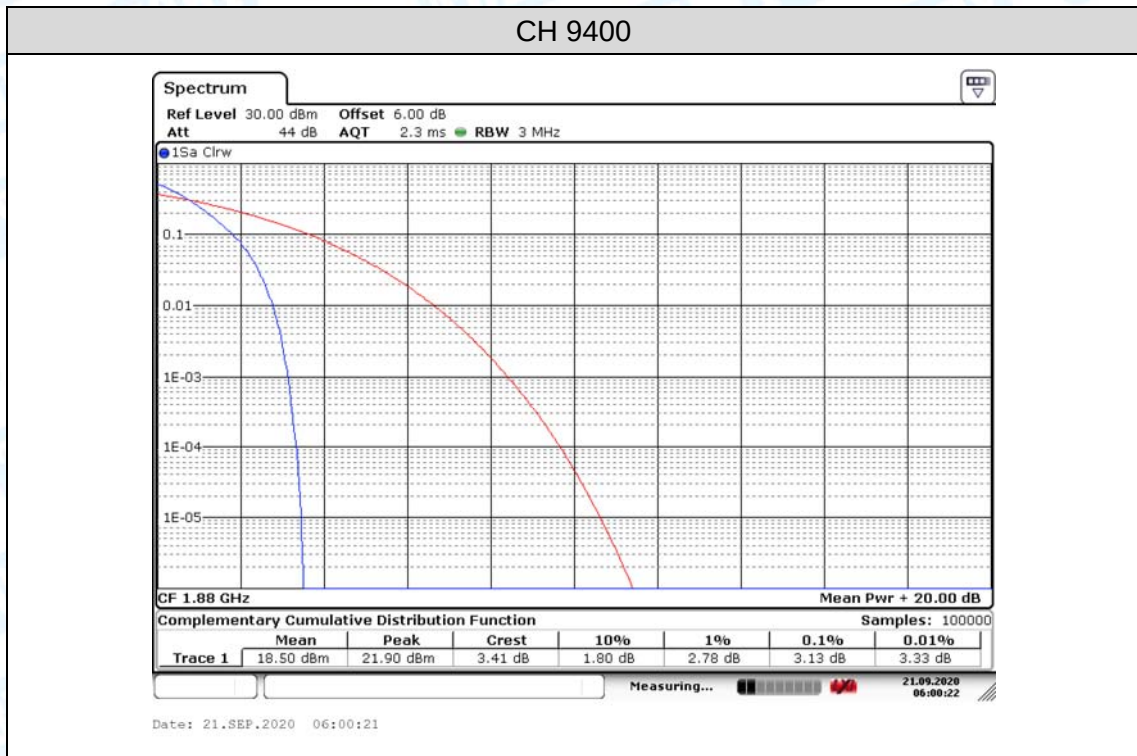

Attachment D-- Radiated Output Power

Measurement Data (worst case)

GSM 850								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBd)	Cable Loss (dB)	ERP Power (dBm)	ERP Power (W)
GSM 850	128	824.2	H	30.06	3.46	1.26	32.26	1.683
			V	26.16	3.46	1.26	28.36	0.685
	190	836.6	H	29.00	3.82	1.26	31.56	1.432
			V	26.79	3.82	1.26	29.35	0.861
	251	848.8	H	28.06	4.16	1.26	30.96	1.247
			V	24.78	4.16	1.26	27.68	0.586
GPRS 850 (1 Slot)	128	824.2	H	25.49	3.46	1.26	27.69	0.587
			V	23.49	3.46	1.26	25.69	0.371
	190	836.6	H	25.07	3.82	1.26	27.63	0.579
			V	22.87	3.82	1.26	25.43	0.349
	251	848.8	H	25.22	4.16	1.26	28.12	0.649
			V	22.79	4.16	1.26	25.69	0.371
EDGE 850 (1 Slot)	128	824.2	H	22.16	3.46	1.26	24.36	0.273
			V	20.38	3.46	1.26	22.58	0.181
	190	836.6	H	22.29	3.82	1.26	24.85	0.305
			V	19.59	3.82	1.26	22.15	0.164
	251	848.8	H	21.78	4.16	1.26	24.68	0.294
			V	19.19	4.16	1.26	22.09	0.162
Limit							38.5	7

PCS 1900								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
GSM 1900	512	1850.2	H	24.44	5.01	2.59	26.86	0.485
			V	20.83	5.01	2.59	23.25	0.211
	661	1880.0	H	23.95	4.82	2.59	26.18	0.415
			V	20.83	4.82	2.59	23.06	0.202
	810	1909.8	H	24.71	4.45	2.59	26.57	0.454
			V	21.39	4.45	2.59	23.25	0.211
GPRS 1900 (1 Slot)	512	1850.2	H	24.56	5.01	2.59	26.98	0.499
			V	20.23	5.01	2.59	22.65	0.184
	661	1880.0	H	24.45	4.82	2.59	26.68	0.466
			V	20.33	4.82	2.59	22.56	0.180
	810	1909.8	H	24.49	4.45	2.59	26.35	0.432
			V	20.89	4.45	2.59	22.75	0.188
EDGE 1900 (1 Slot)	512	1850.2	H	20.67	5.01	2.59	23.09	0.204
			V	18.54	5.01	2.59	20.96	0.125
	661	1880.0	H	20.93	4.82	2.59	23.16	0.207
			V	18.33	4.82	2.59	20.56	0.114
	810	1909.8	H	22.00	4.45	2.59	23.86	0.243
			V	18.39	4.45	2.59	20.25	0.106
Limit							33	2


UMTS Band V								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
Band V RMC	4132	826.4	H	18.66	3.46	1.26	20.86	0.1219
			V	16.12	3.46	1.26	18.32	0.0679
	4183	836.6	H	18.42	3.82	1.26	20.98	0.1253
			V	15.89	3.82	1.26	18.45	0.0700
	4233	846.6	H	18.13	4.16	1.26	21.03	0.1268
			V	16.33	4.16	1.26	19.23	0.0838
Limit							38.5	7


UMTS Band II								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
Band II RMC	9262	1852.4	H	17.94	5.01	2.59	20.36	0.109
			V	16.23	5.01	2.59	18.65	0.073
	9400	1880.0	H	18.64	4.82	2.59	20.87	0.122
			V	16.53	4.82	2.59	18.76	0.075
	9538	1907.6	H	19.10	4.45	2.59	20.96	0.125
			V	16.73	4.45	2.59	18.59	0.072
Limit							33	2


Attachment E--Occupied Bandwidth


Measurement Data (worst case)


GSM 850				
Mode	Channel	Frequency (MHz)	99% OBW (KHz)	-26dB Bandwidth (kHz)
GSM 850	128	824.2	239.0605	304.006
	190	836.6	241.5676	310.794
	251	848.8	242.8610	315.974
EGPRS 850	128	824.2	245.4634	315.204
	190	836.6	254.7164	321.973
	251	848.8	244.1790	312.212
PCS 1900				
Mode	Channel	Frequency (MHz)	99% OBW (KHz)	-26dB Bandwidth (kHz)
GSM 1900	512	1850.2	247.6713	318.217
	661	1880.0	245.2616	319.095
	810	1909.8	245.6675	319.000
EGPRS 1900	512	1850.2	244.8469	318.744
	661	1880.0	248.0254	310.592
	810	1909.8	247.2665	318.359
UMTS Band V				
Mode	Channel	Frequency (MHz)	99% OBW (MHz)	-26dB Bandwidth (MHz)
Band V RMC	4132	826.4	4.1513	4.695
	4183	836.6	4.1712	4.705
	4233	846.6	4.1650	4.708
UMTS Band II				
Mode	Channel	Frequency (MHz)	99% OBW (MHz)	-26dB Bandwidth (MHz)
Band II RMC	9262	1852.4	4.1640	4.728
	9400	1880.0	4.1559	4.698
	9538	1907.6	4.1644	4.707

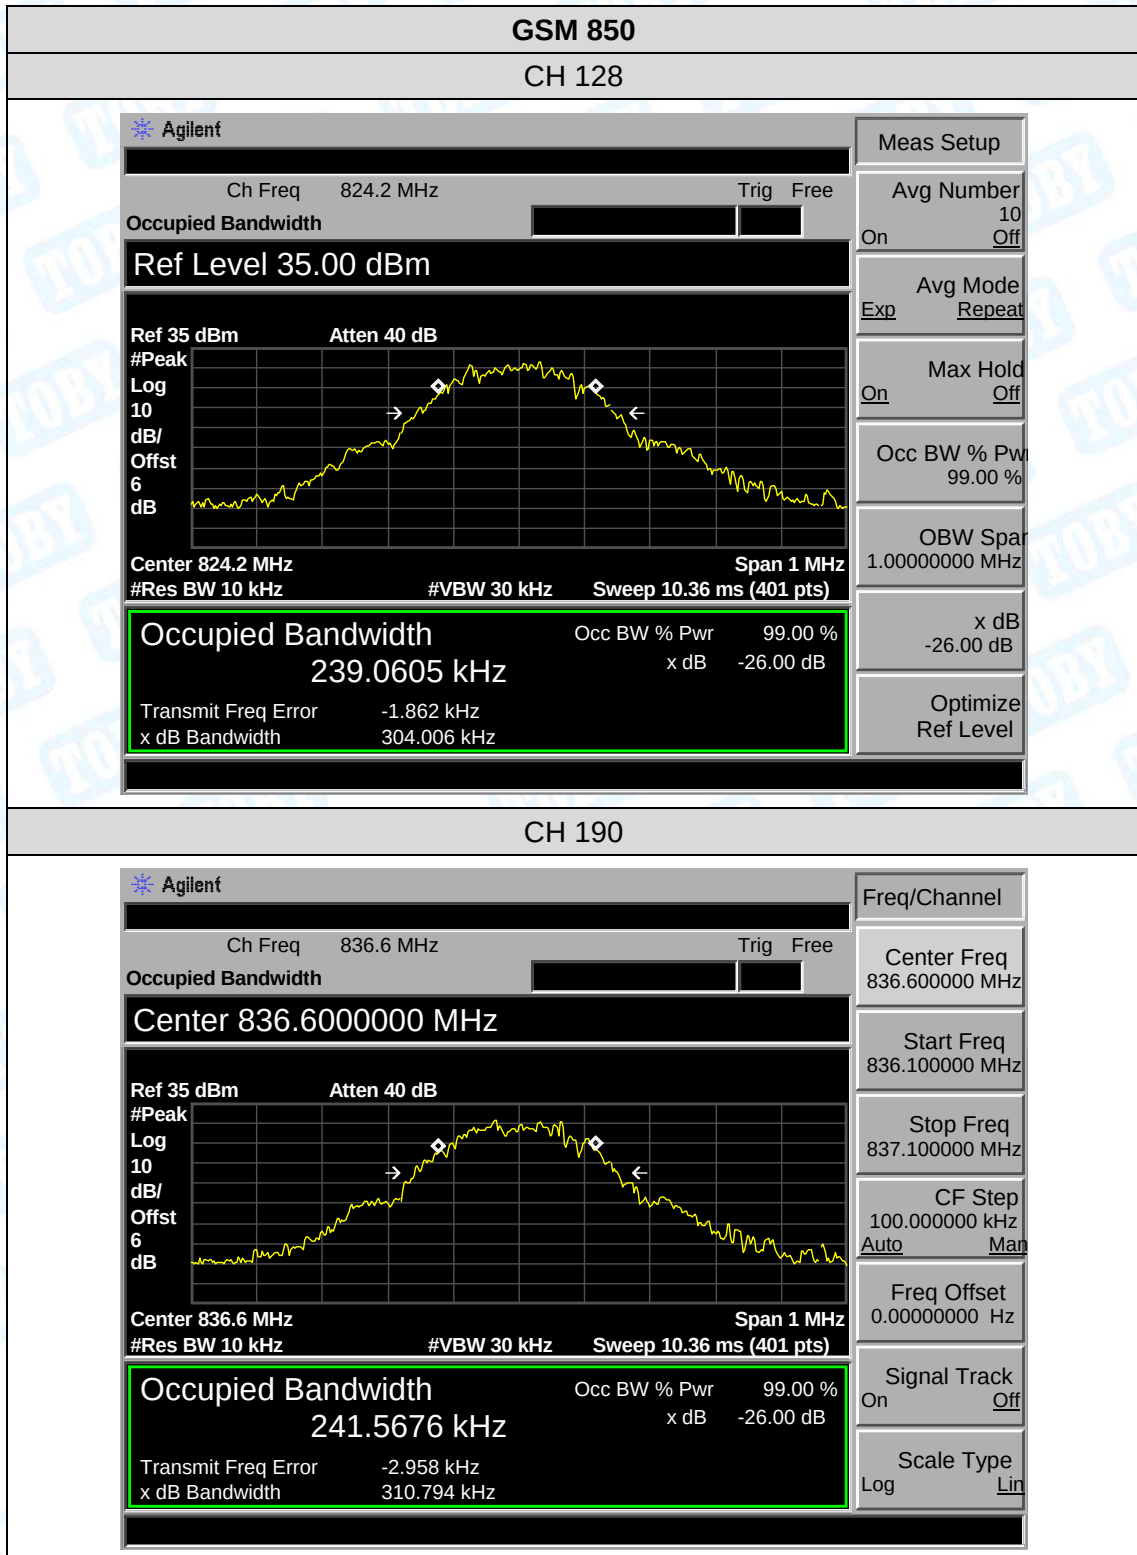


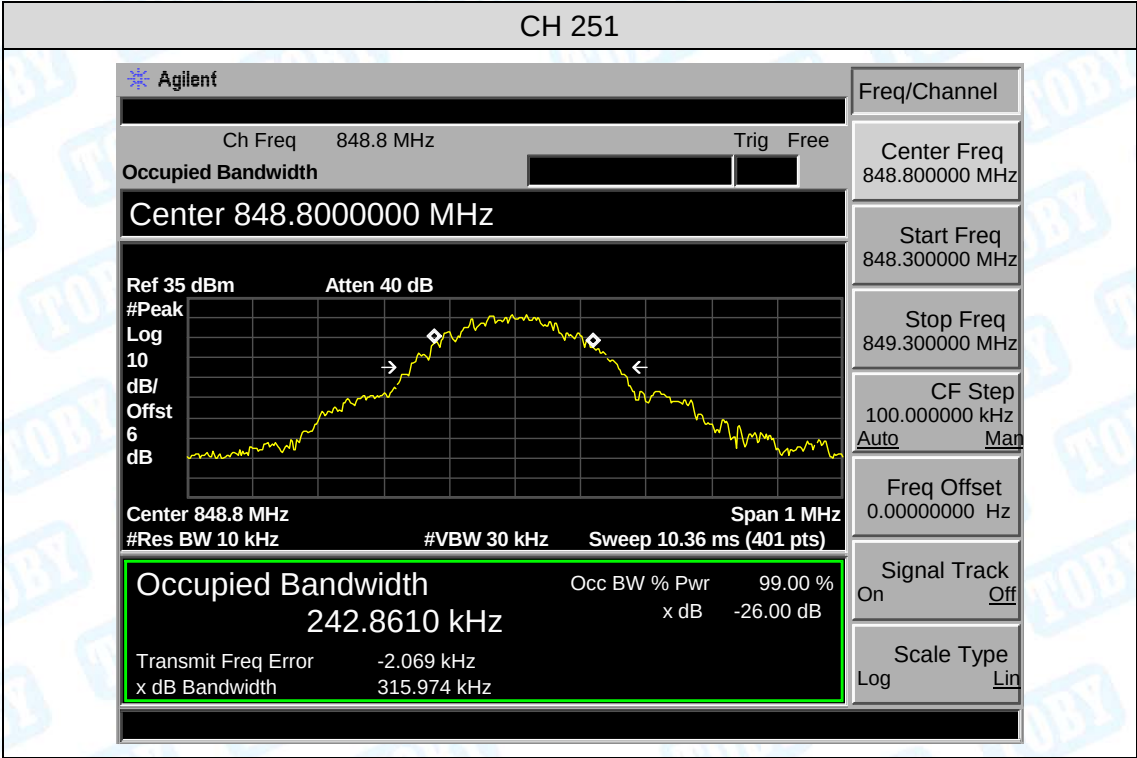


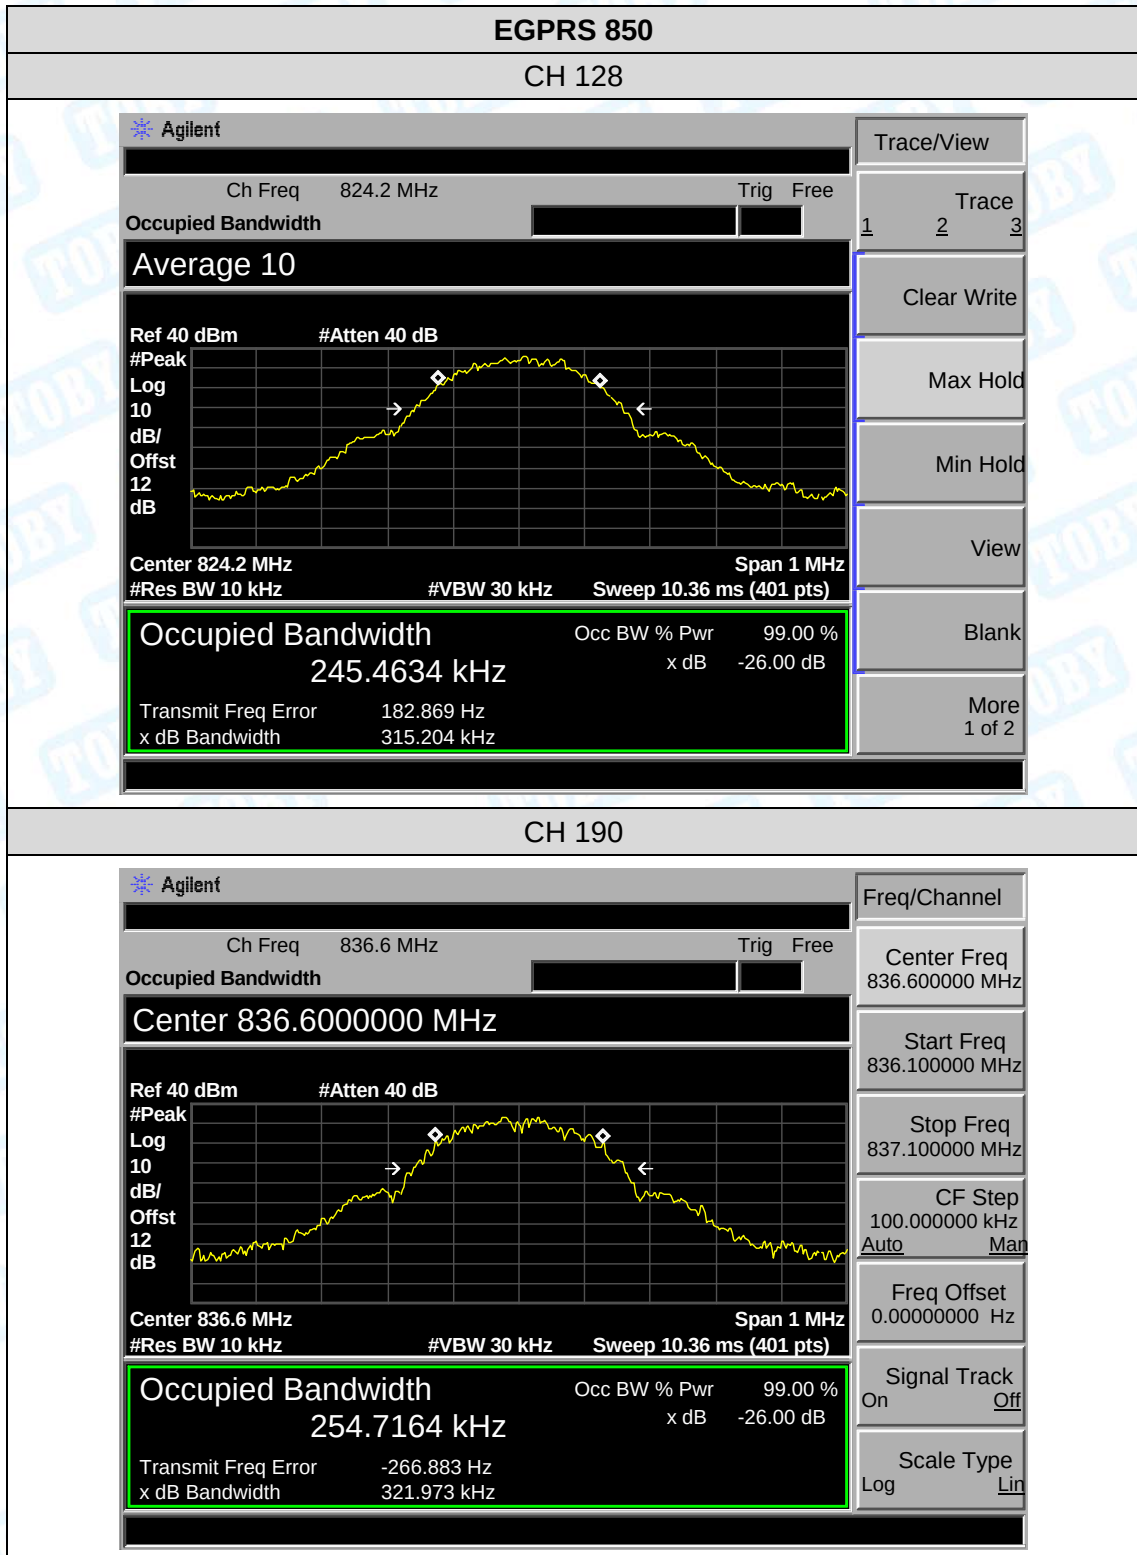


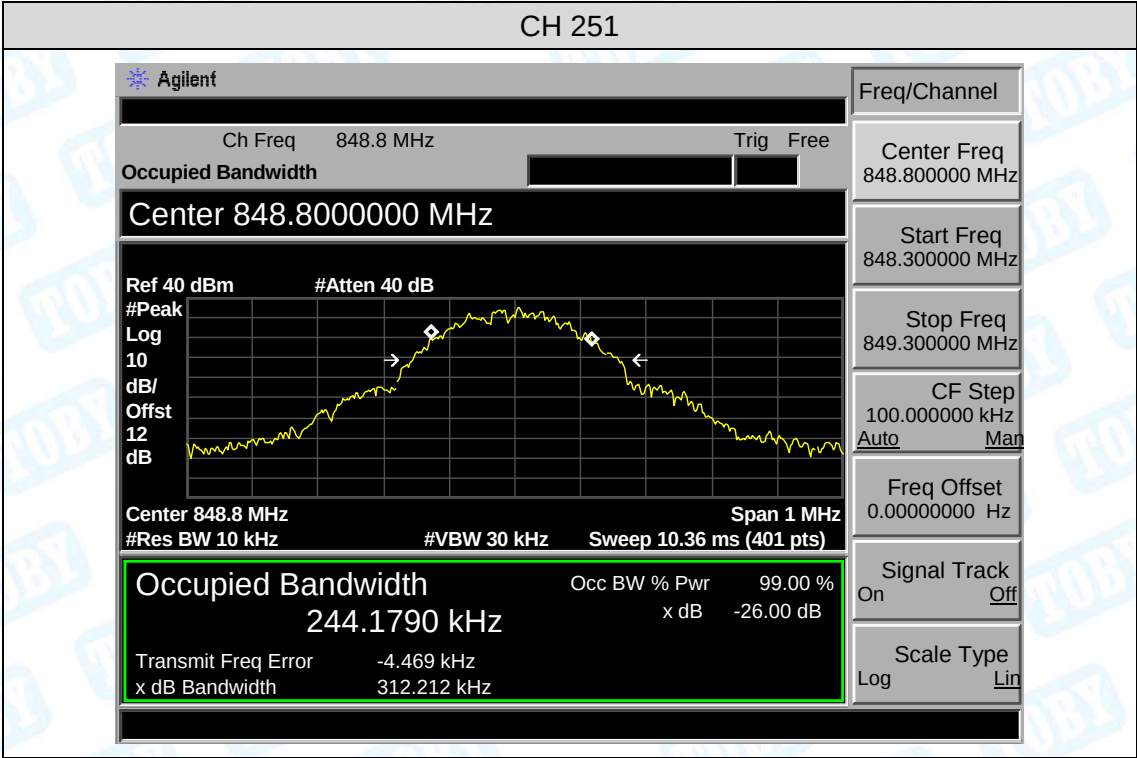


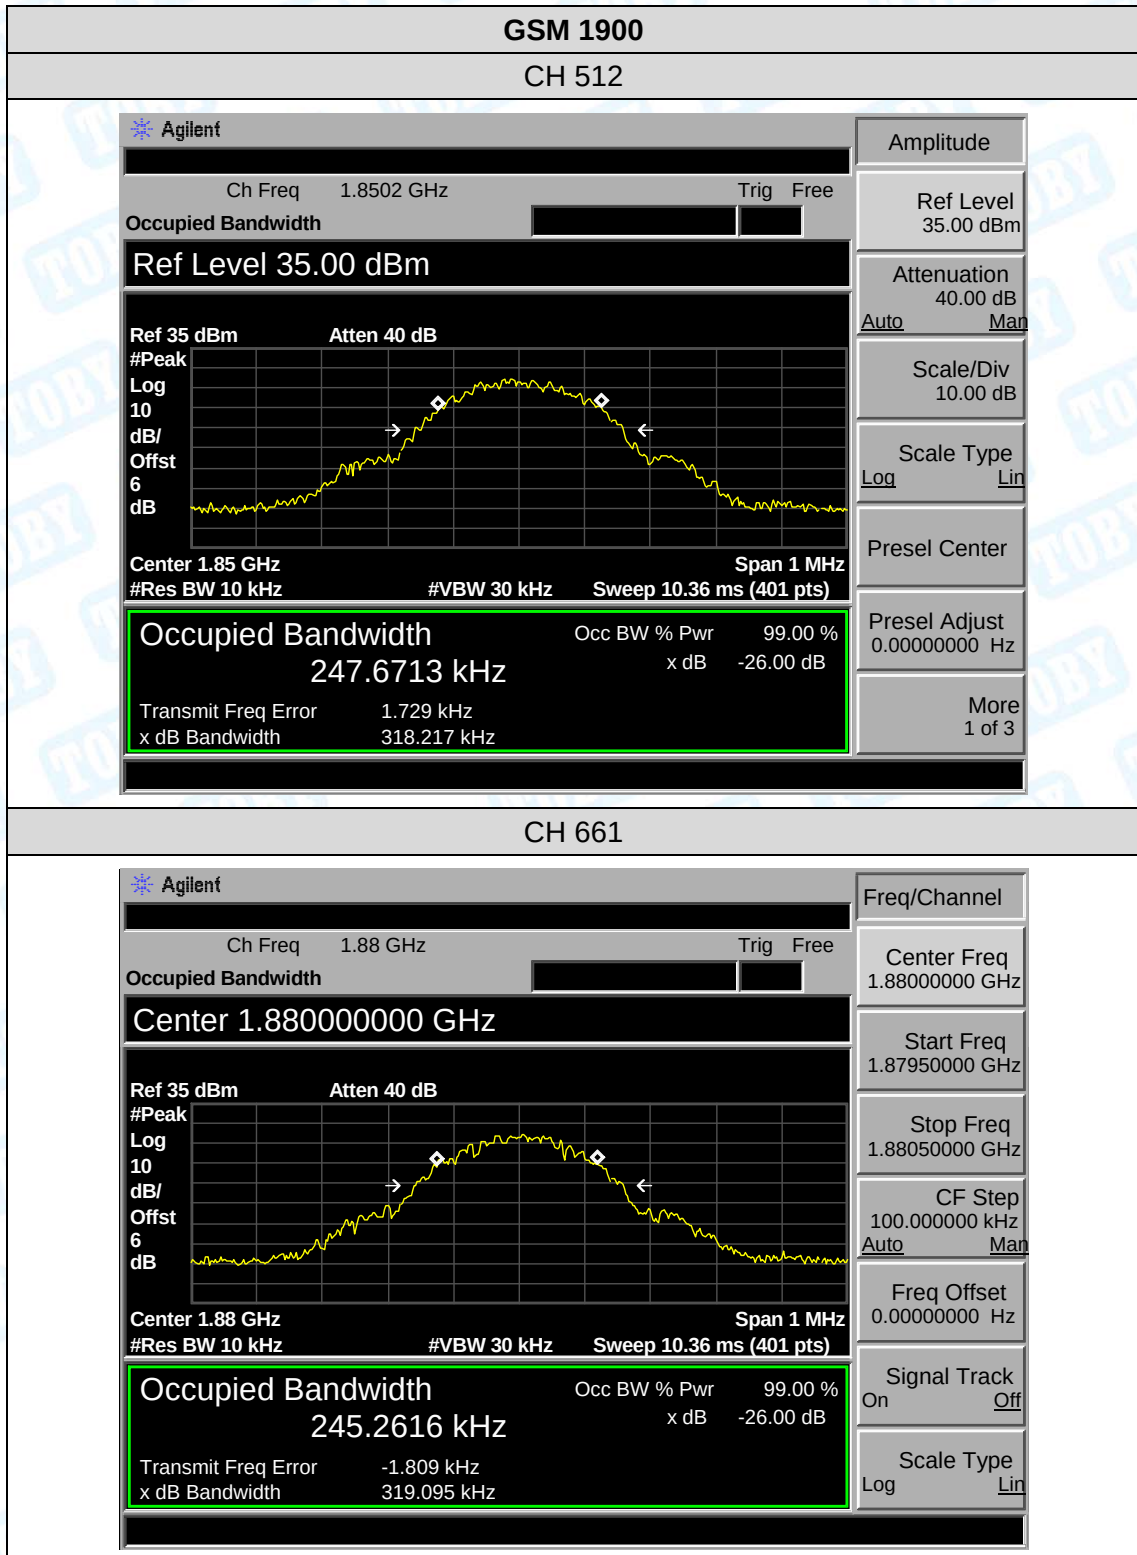


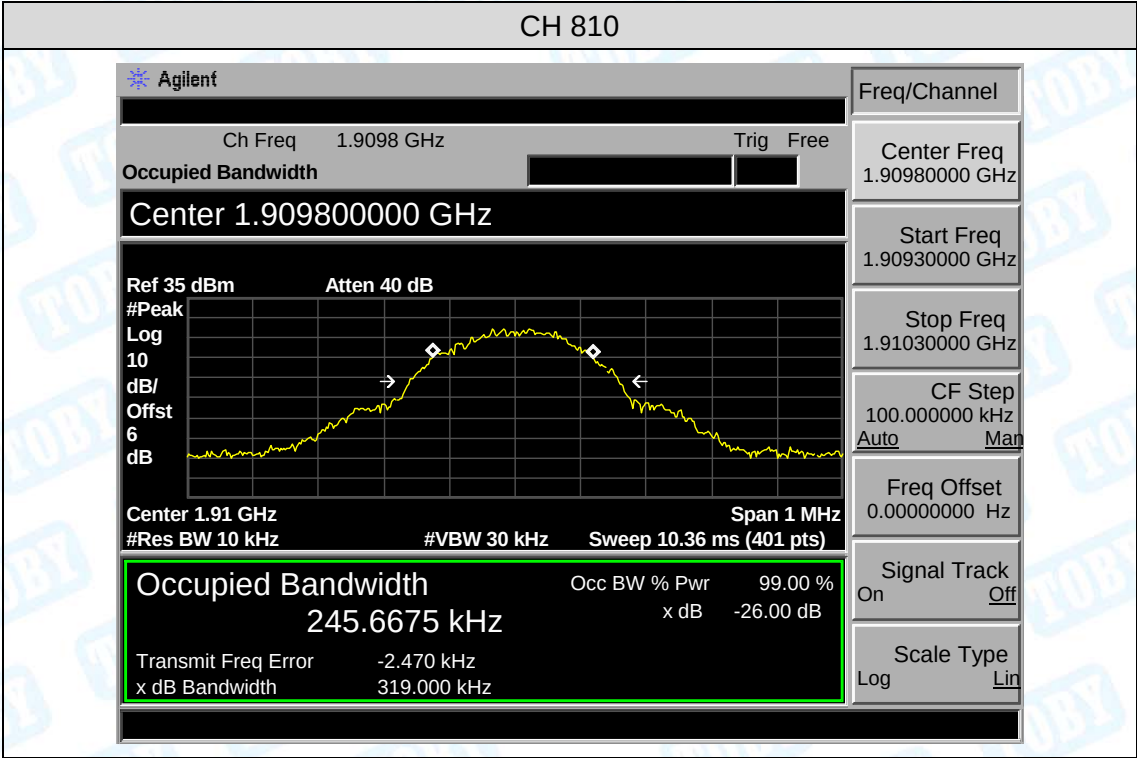


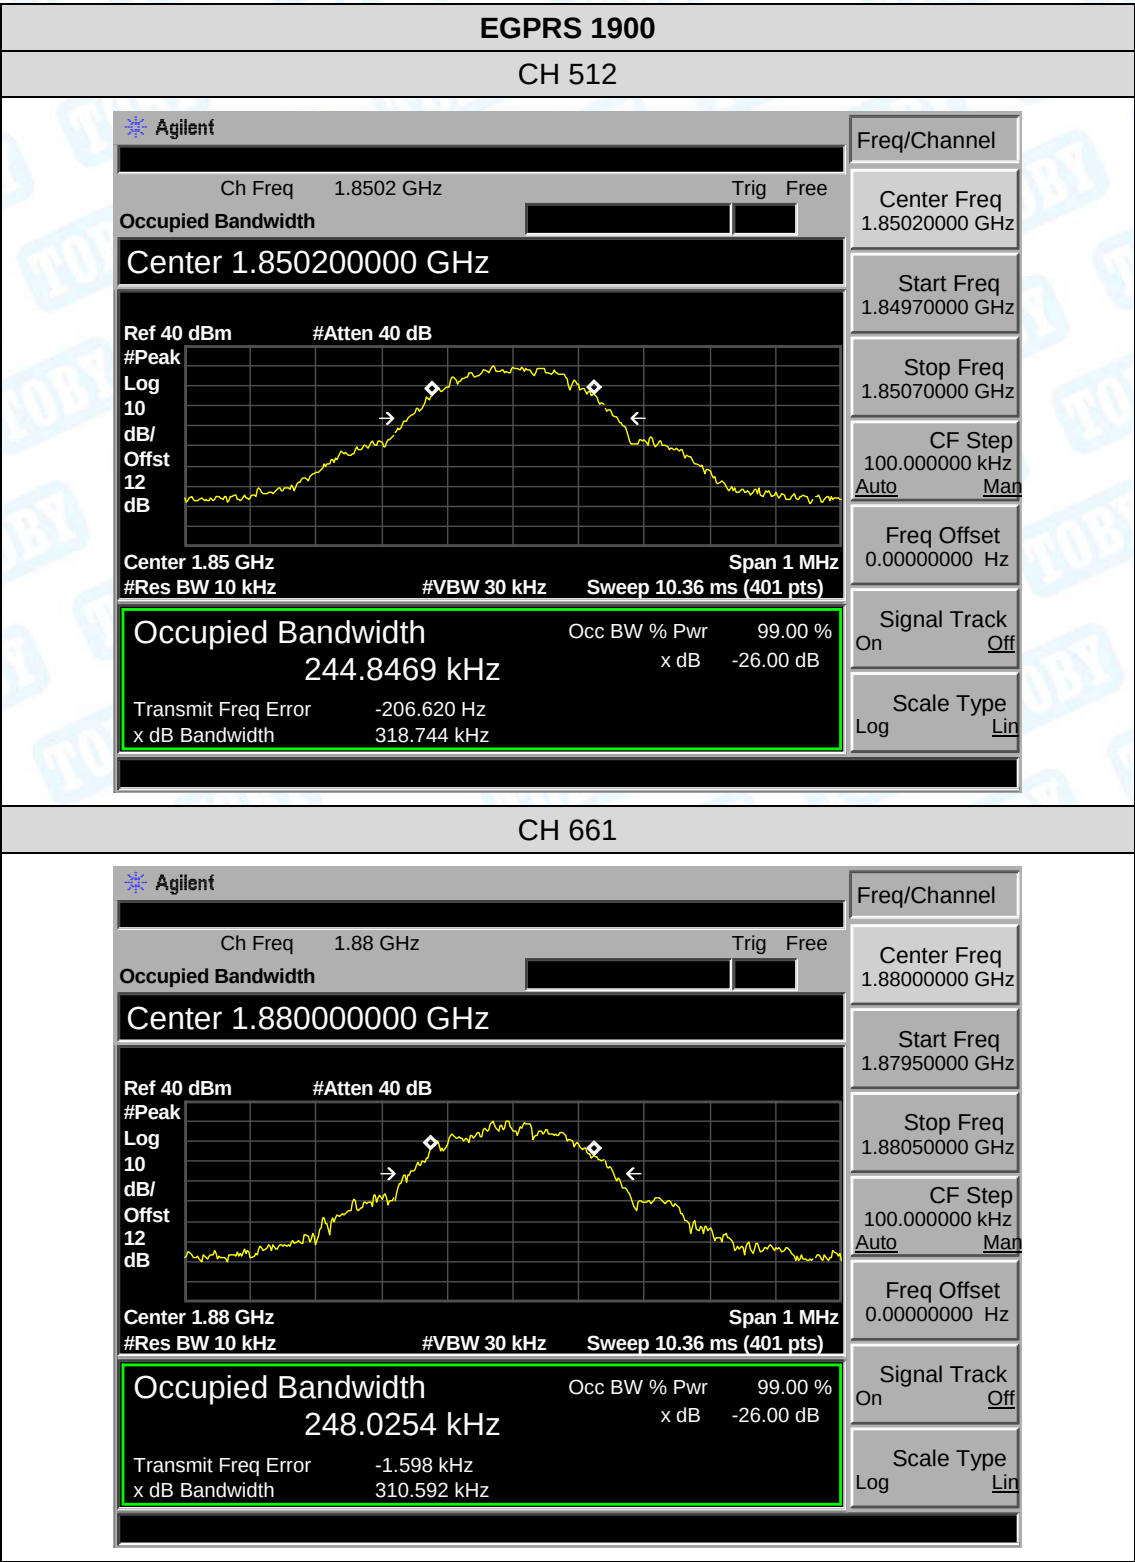


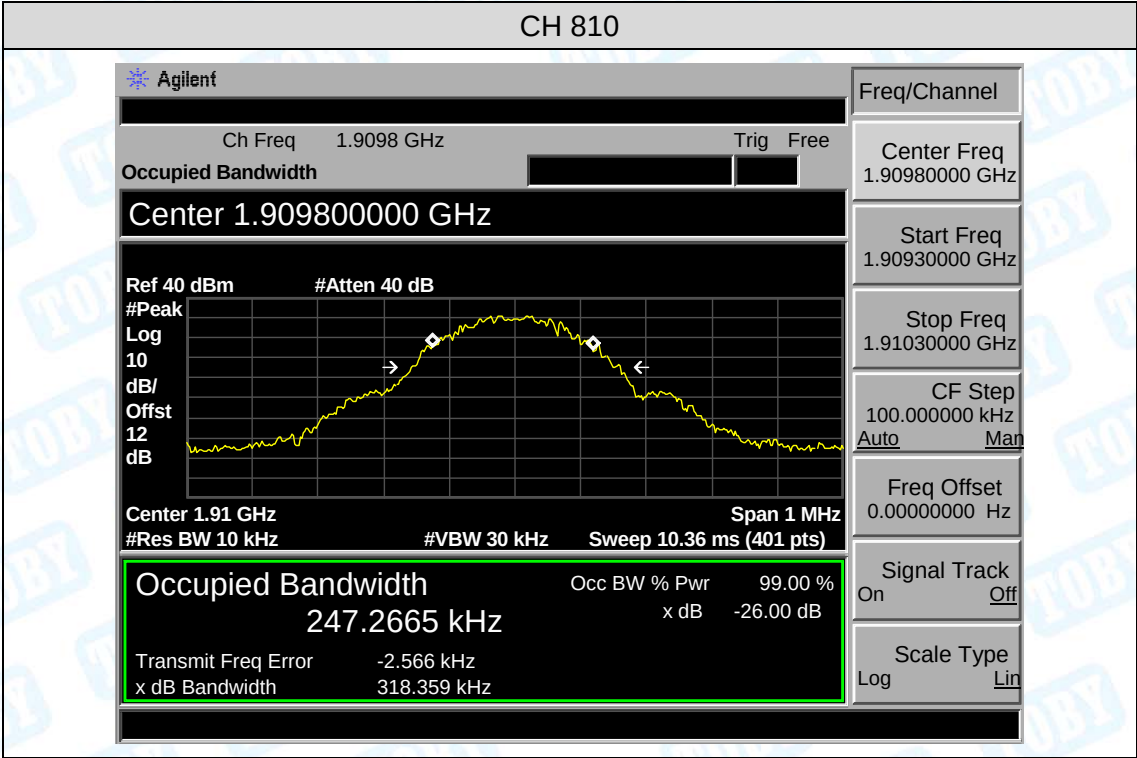

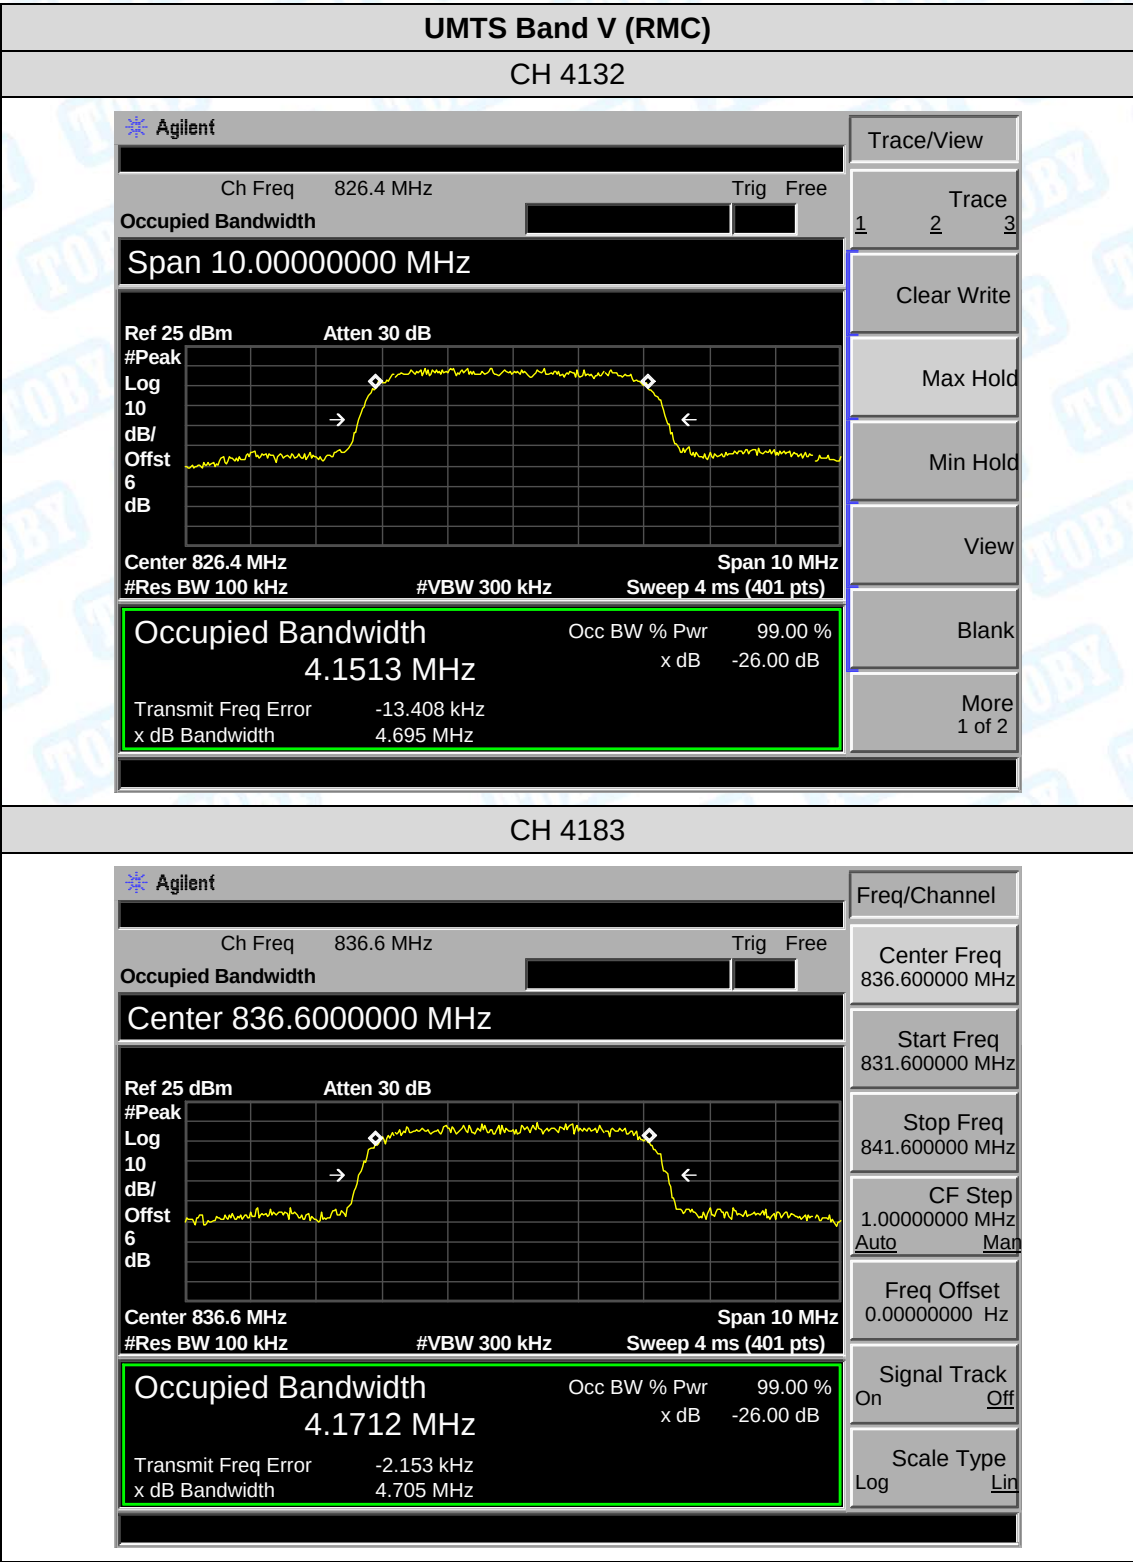

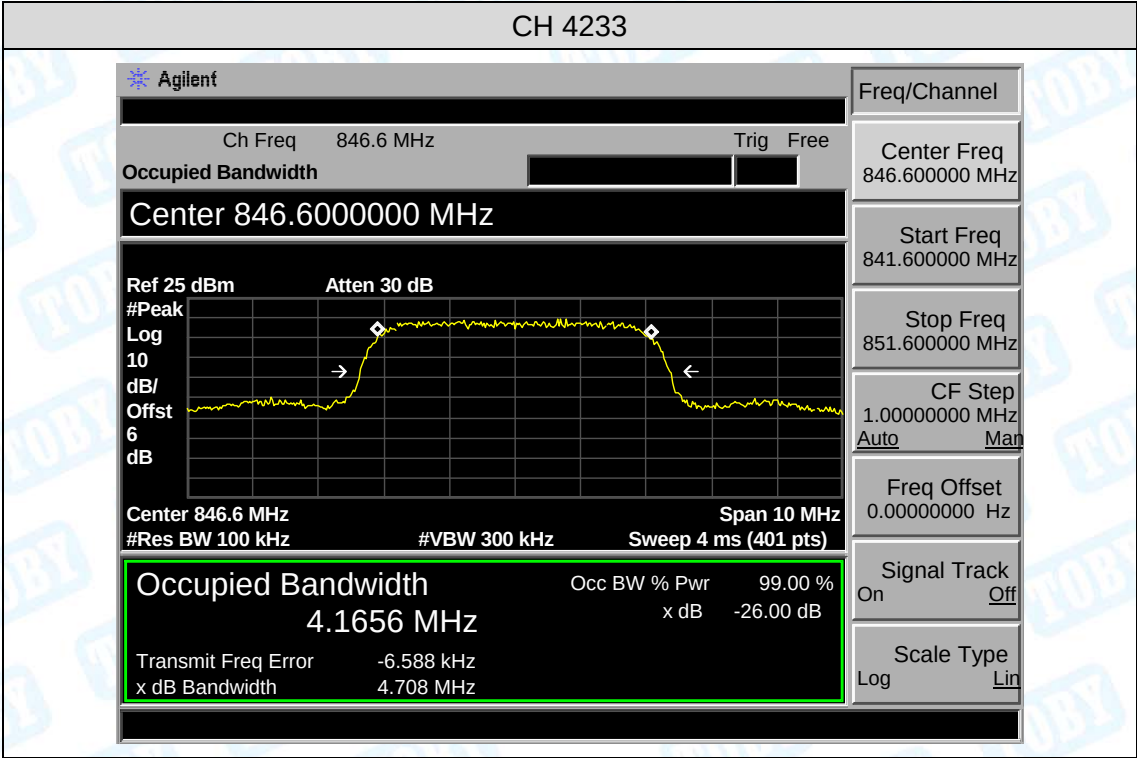


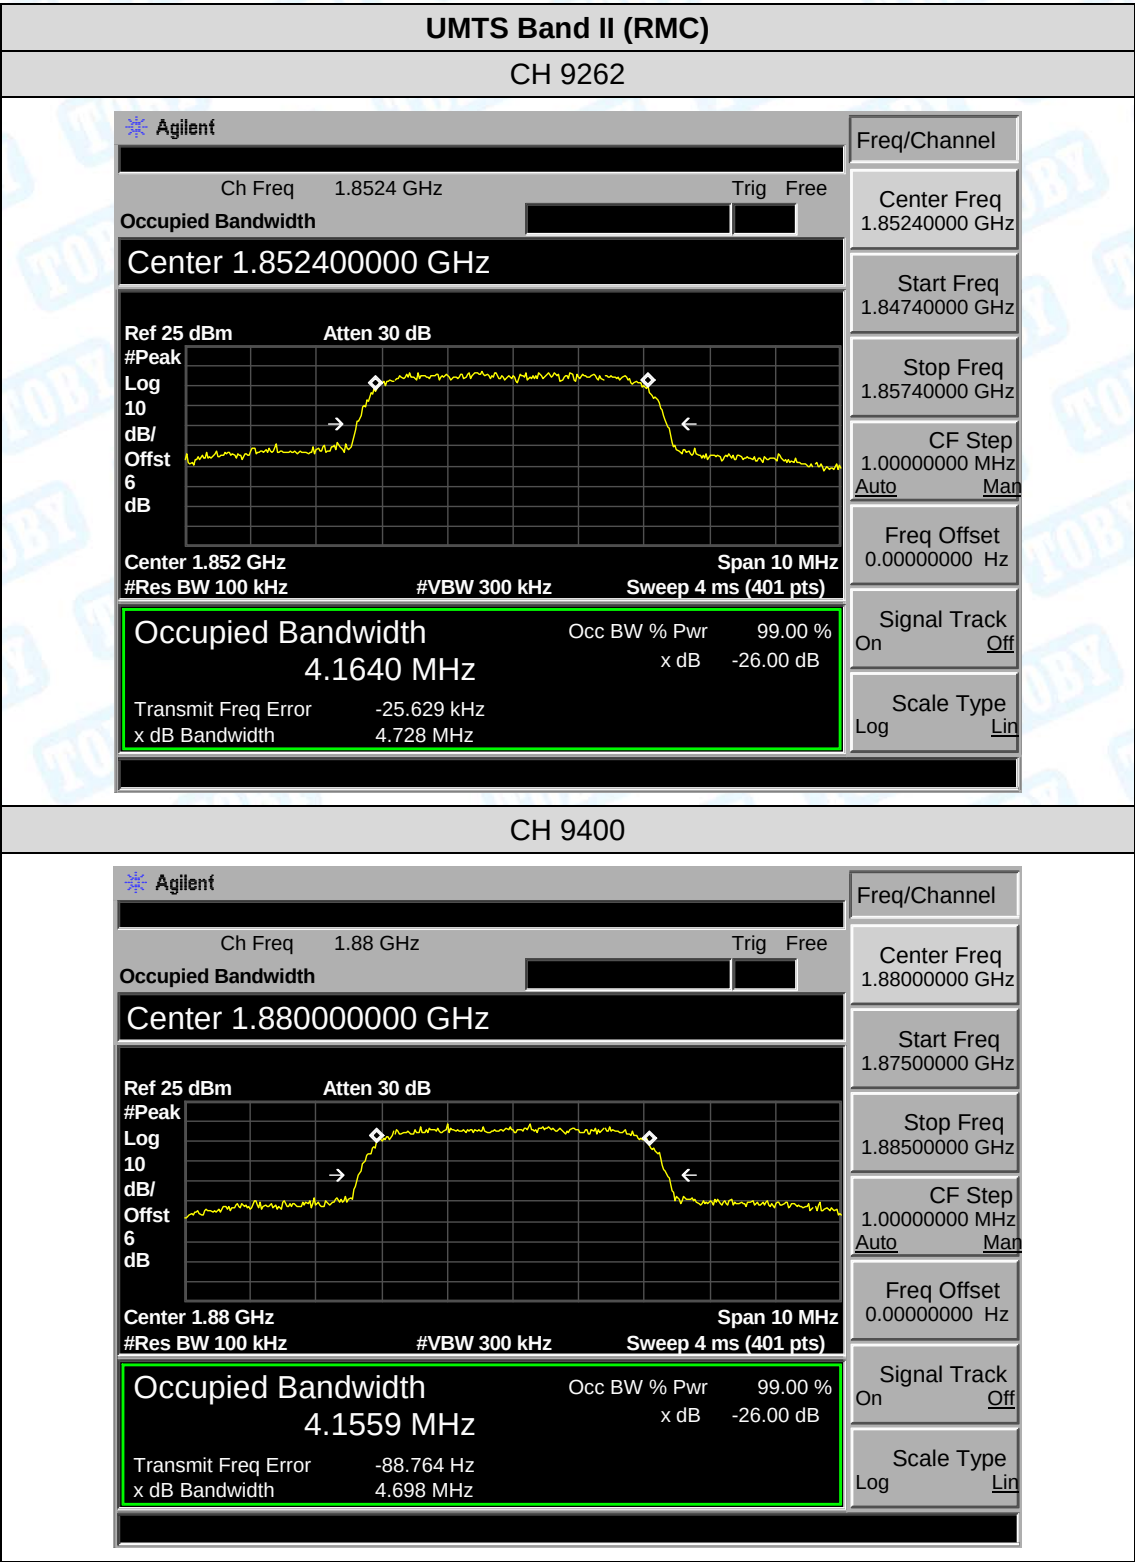


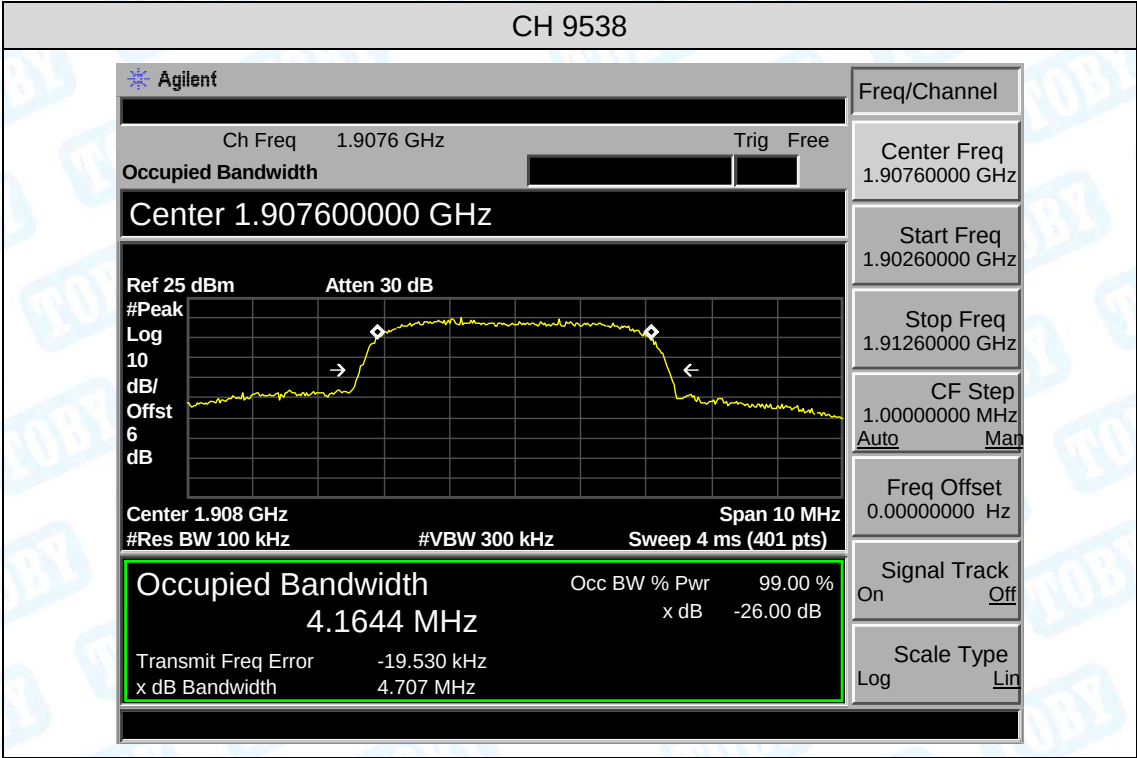



Attachment F--Conducted Out of Band Emissions


Measurement Data (worst case)

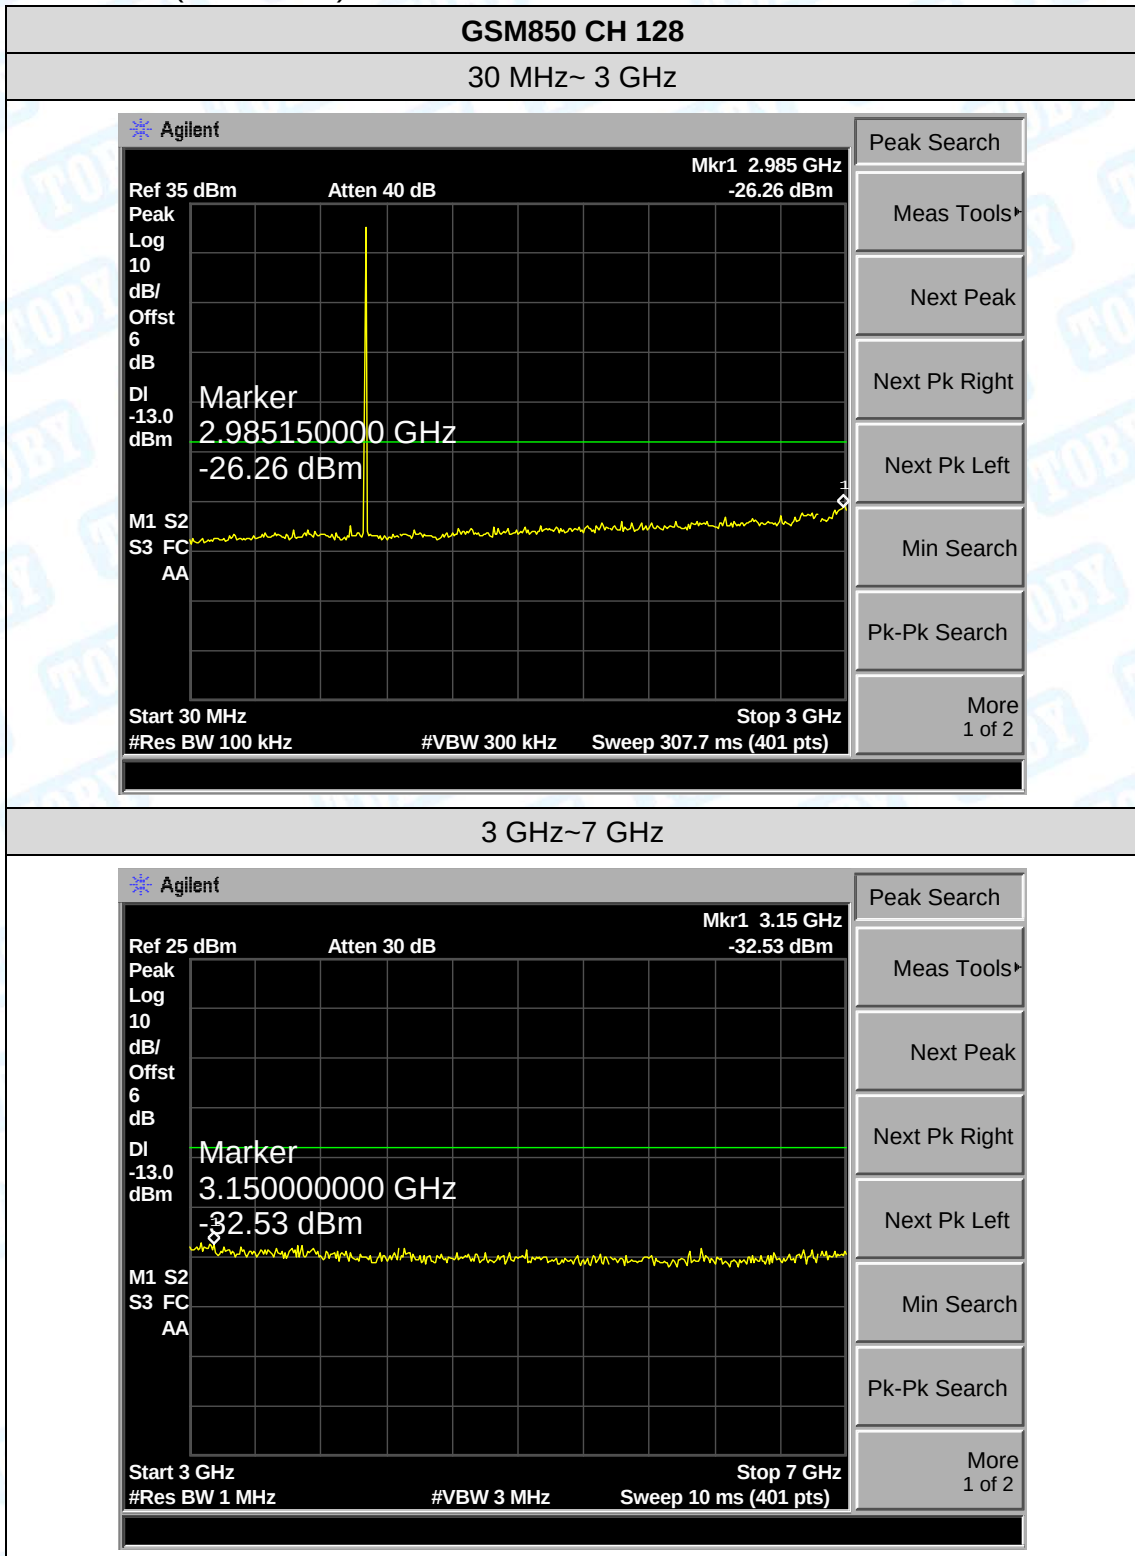


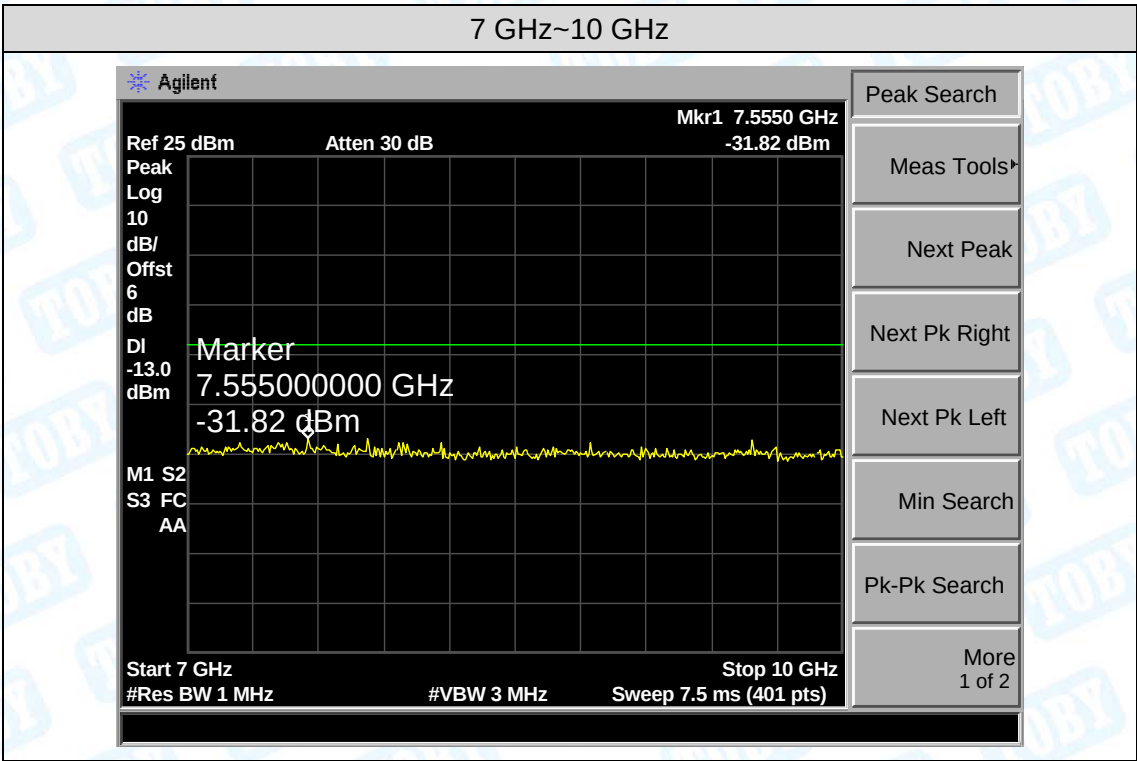


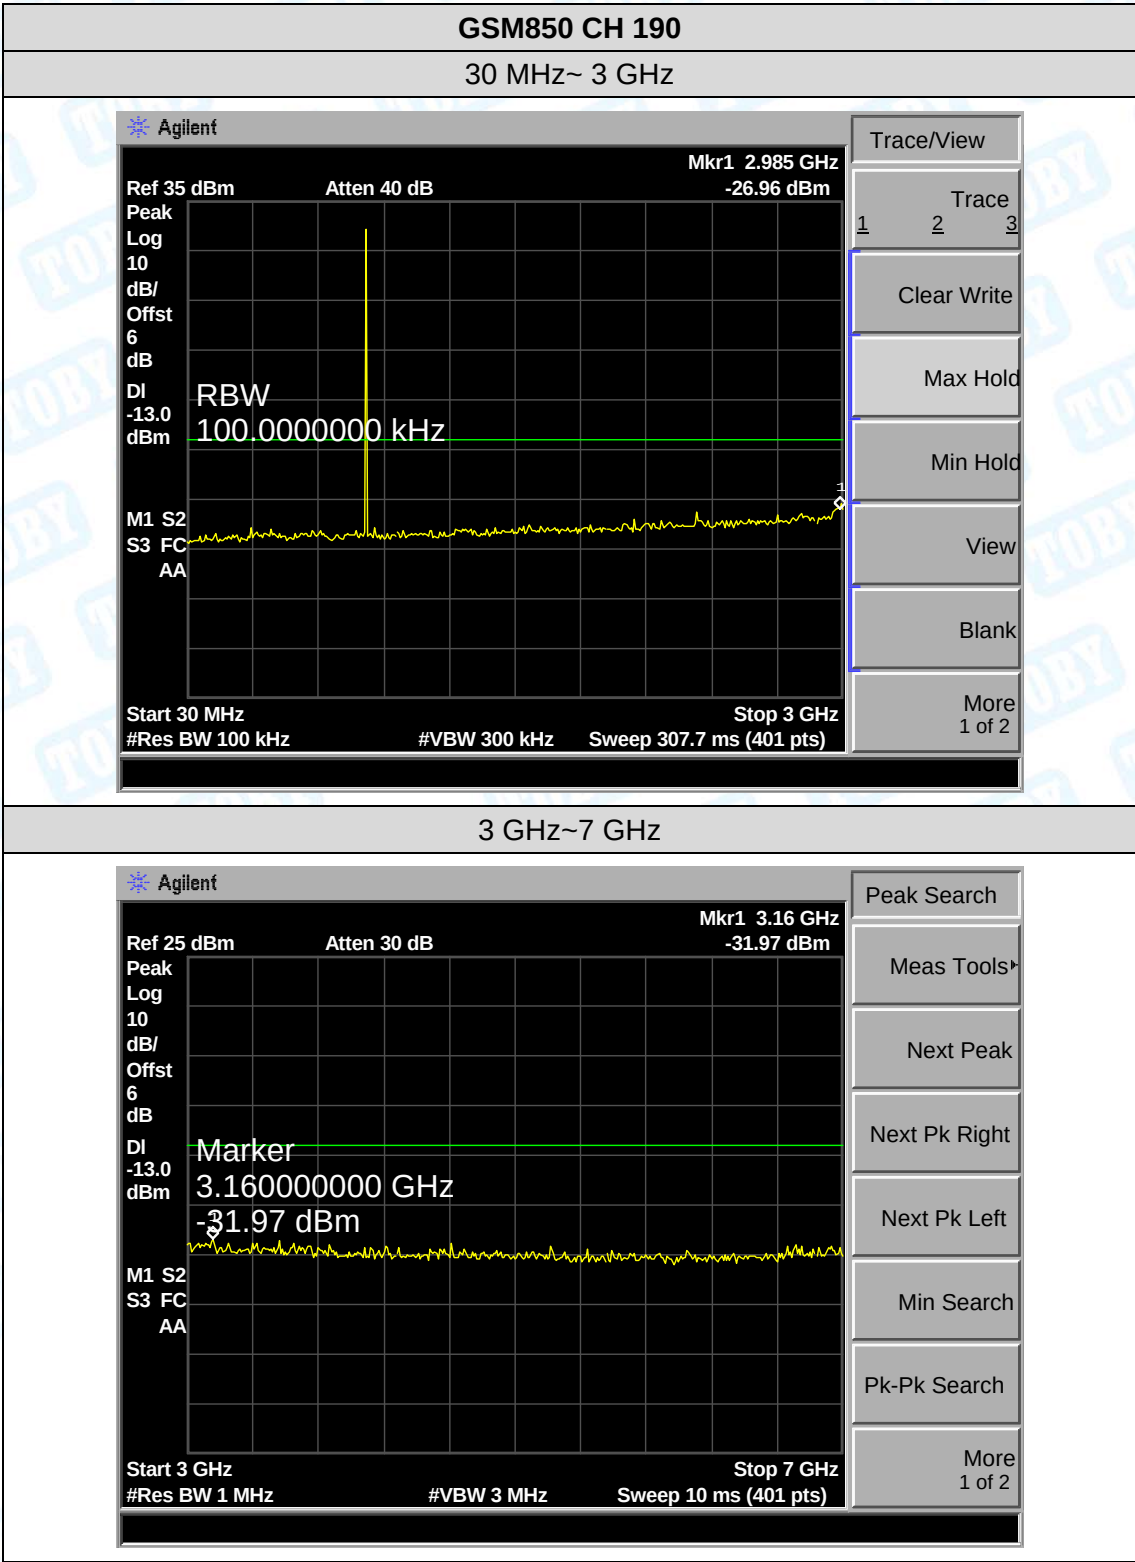


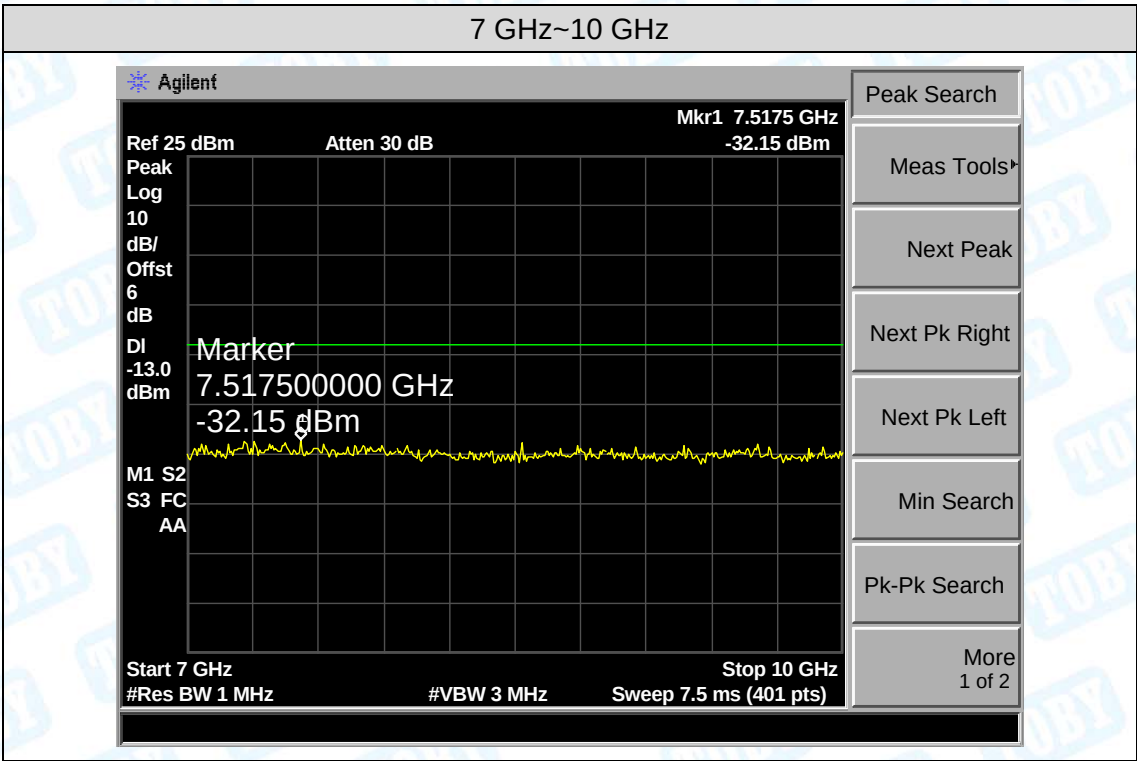


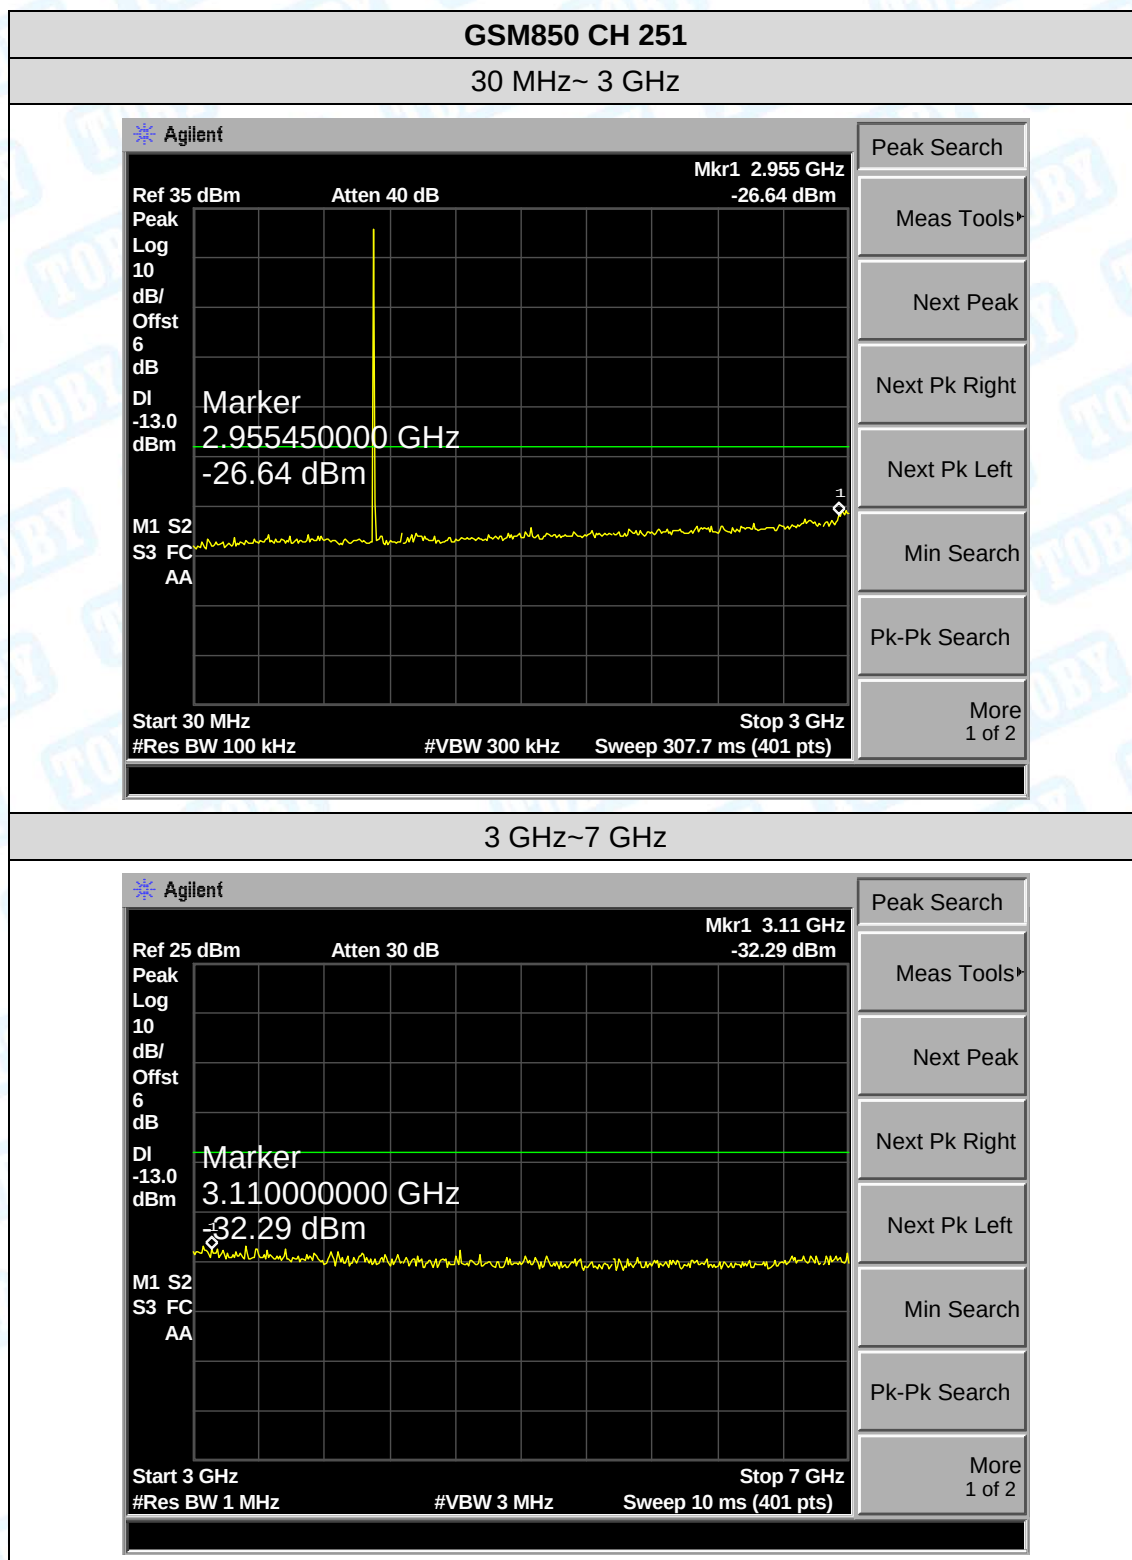


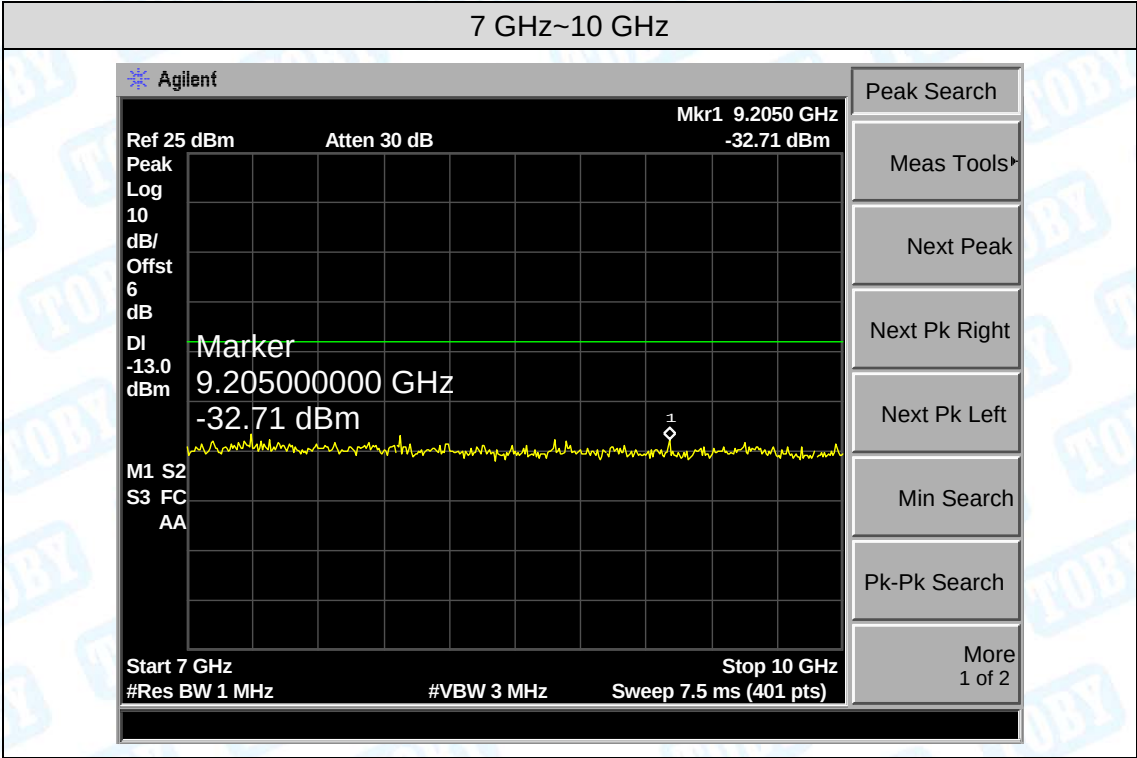


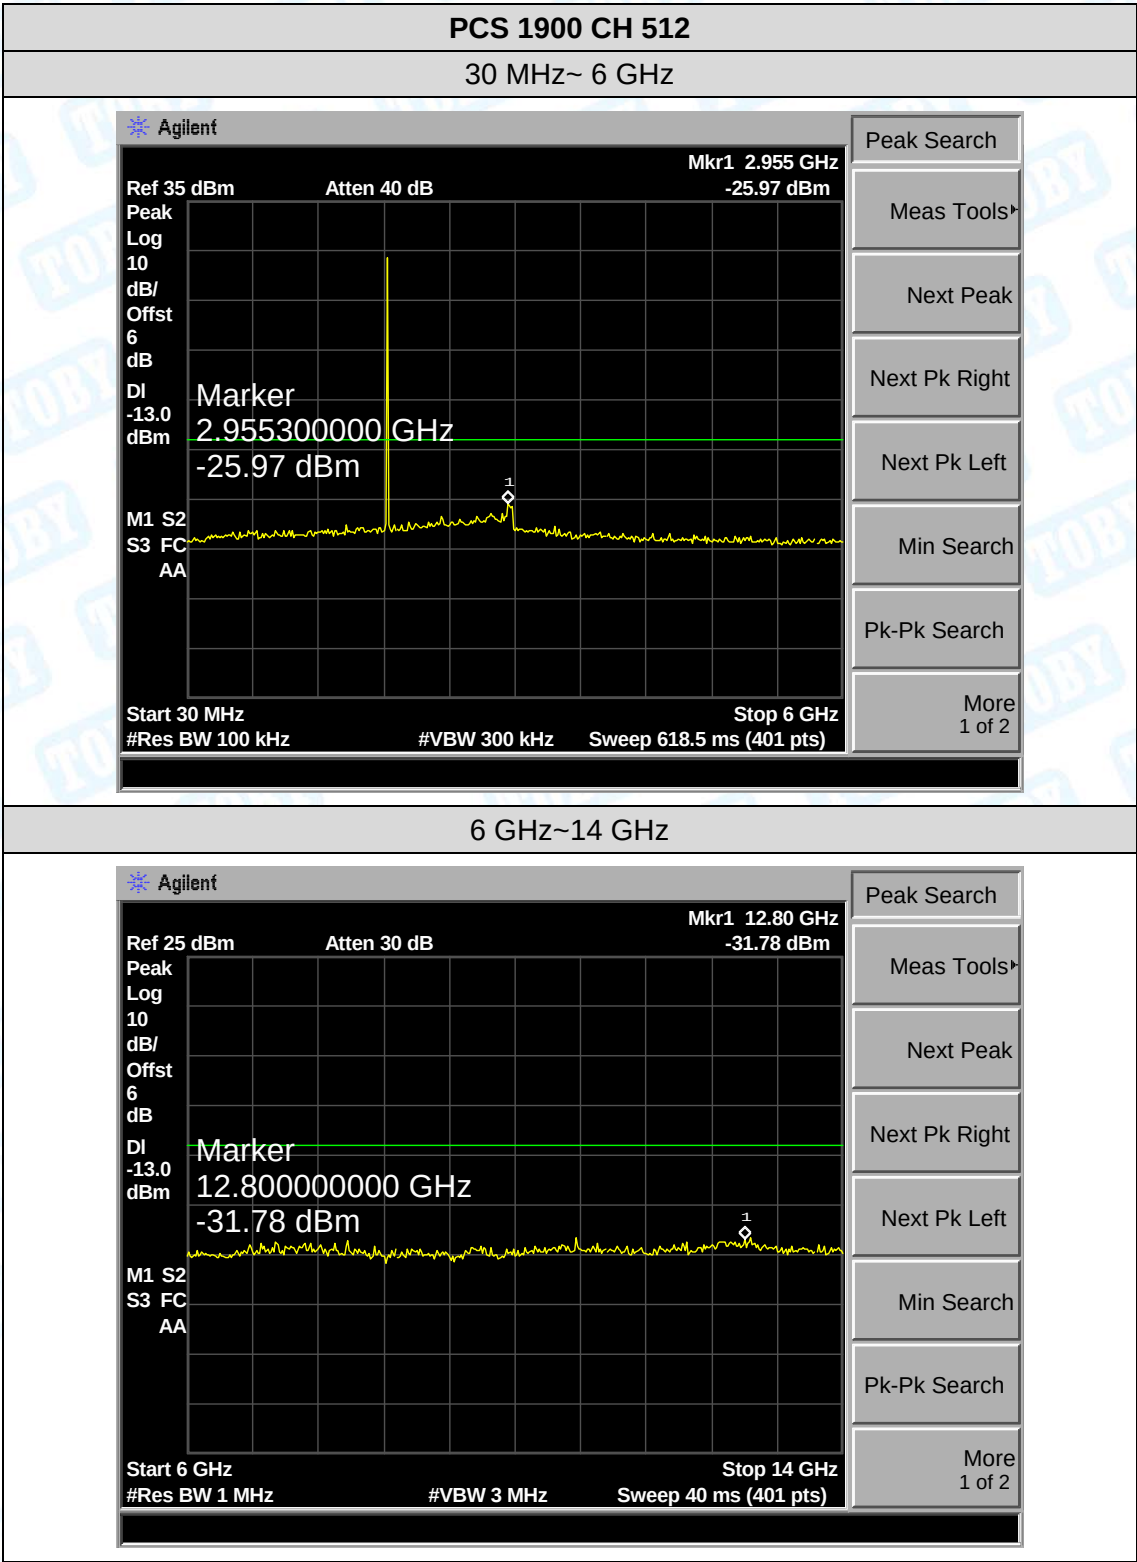


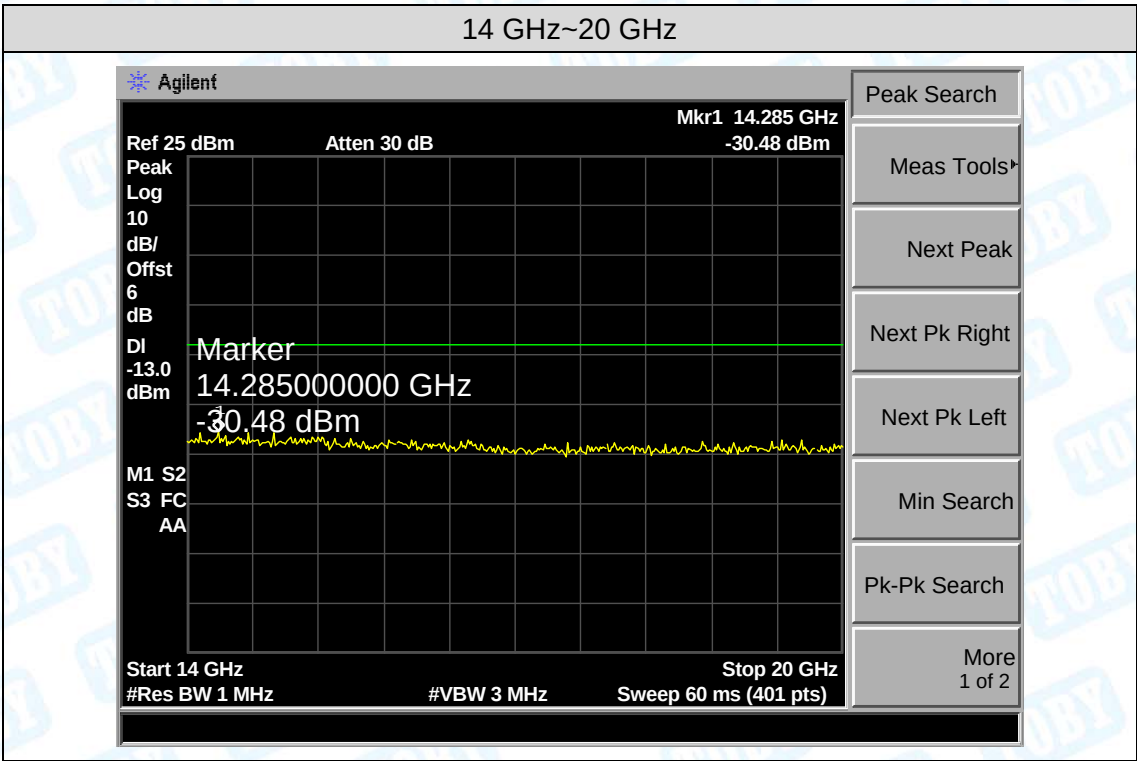





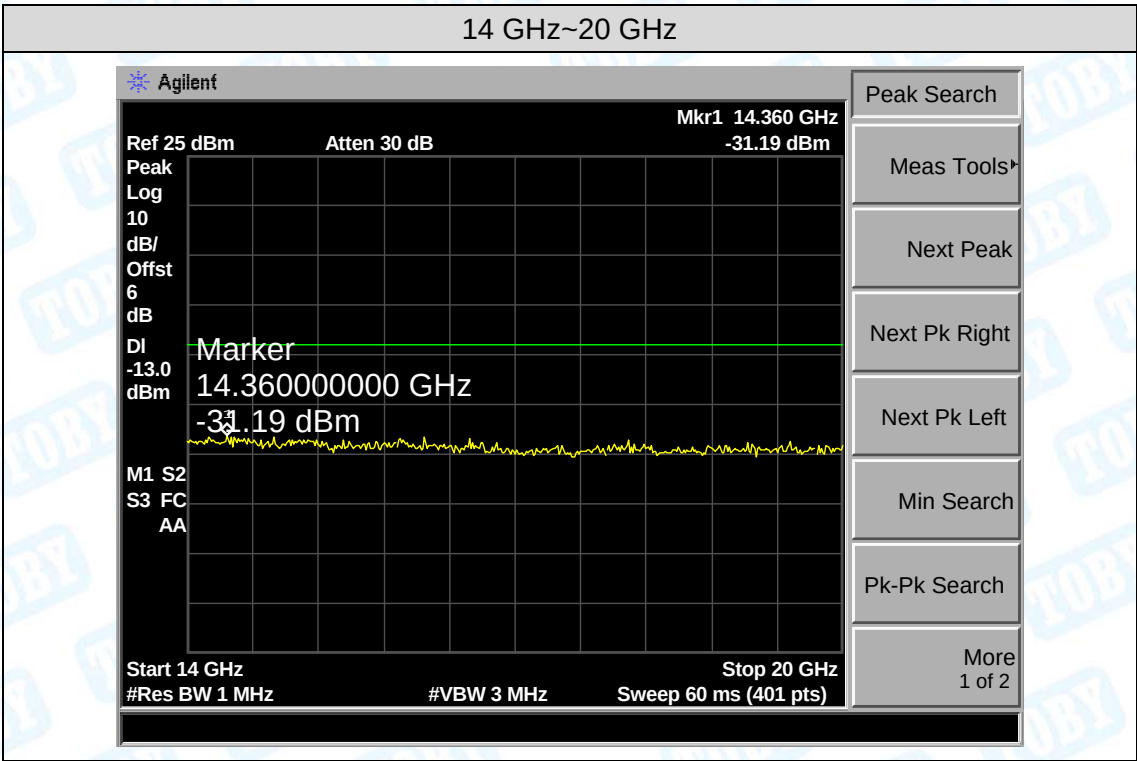


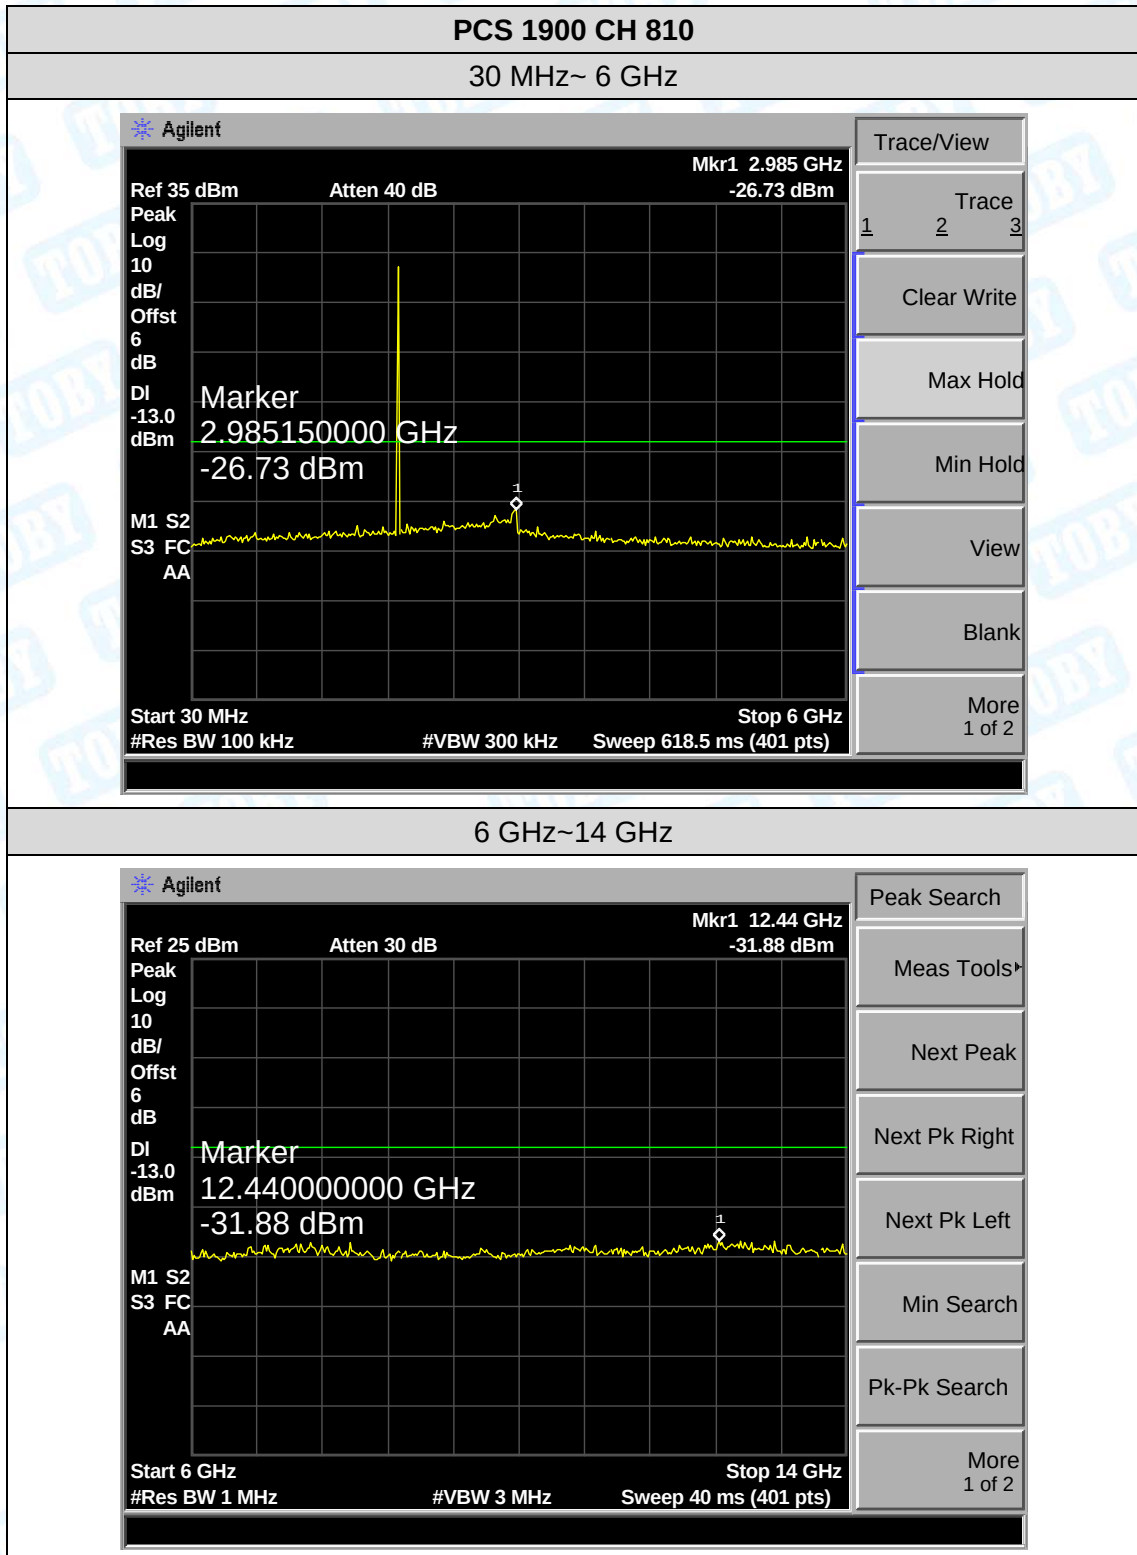


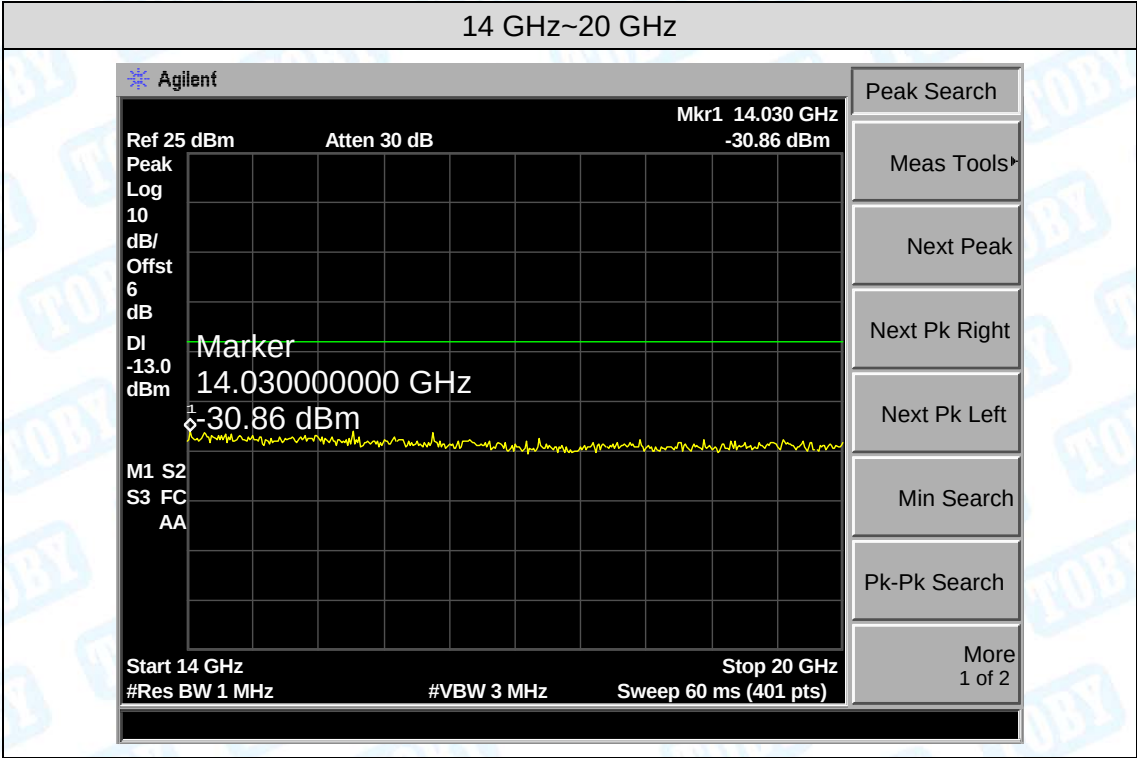


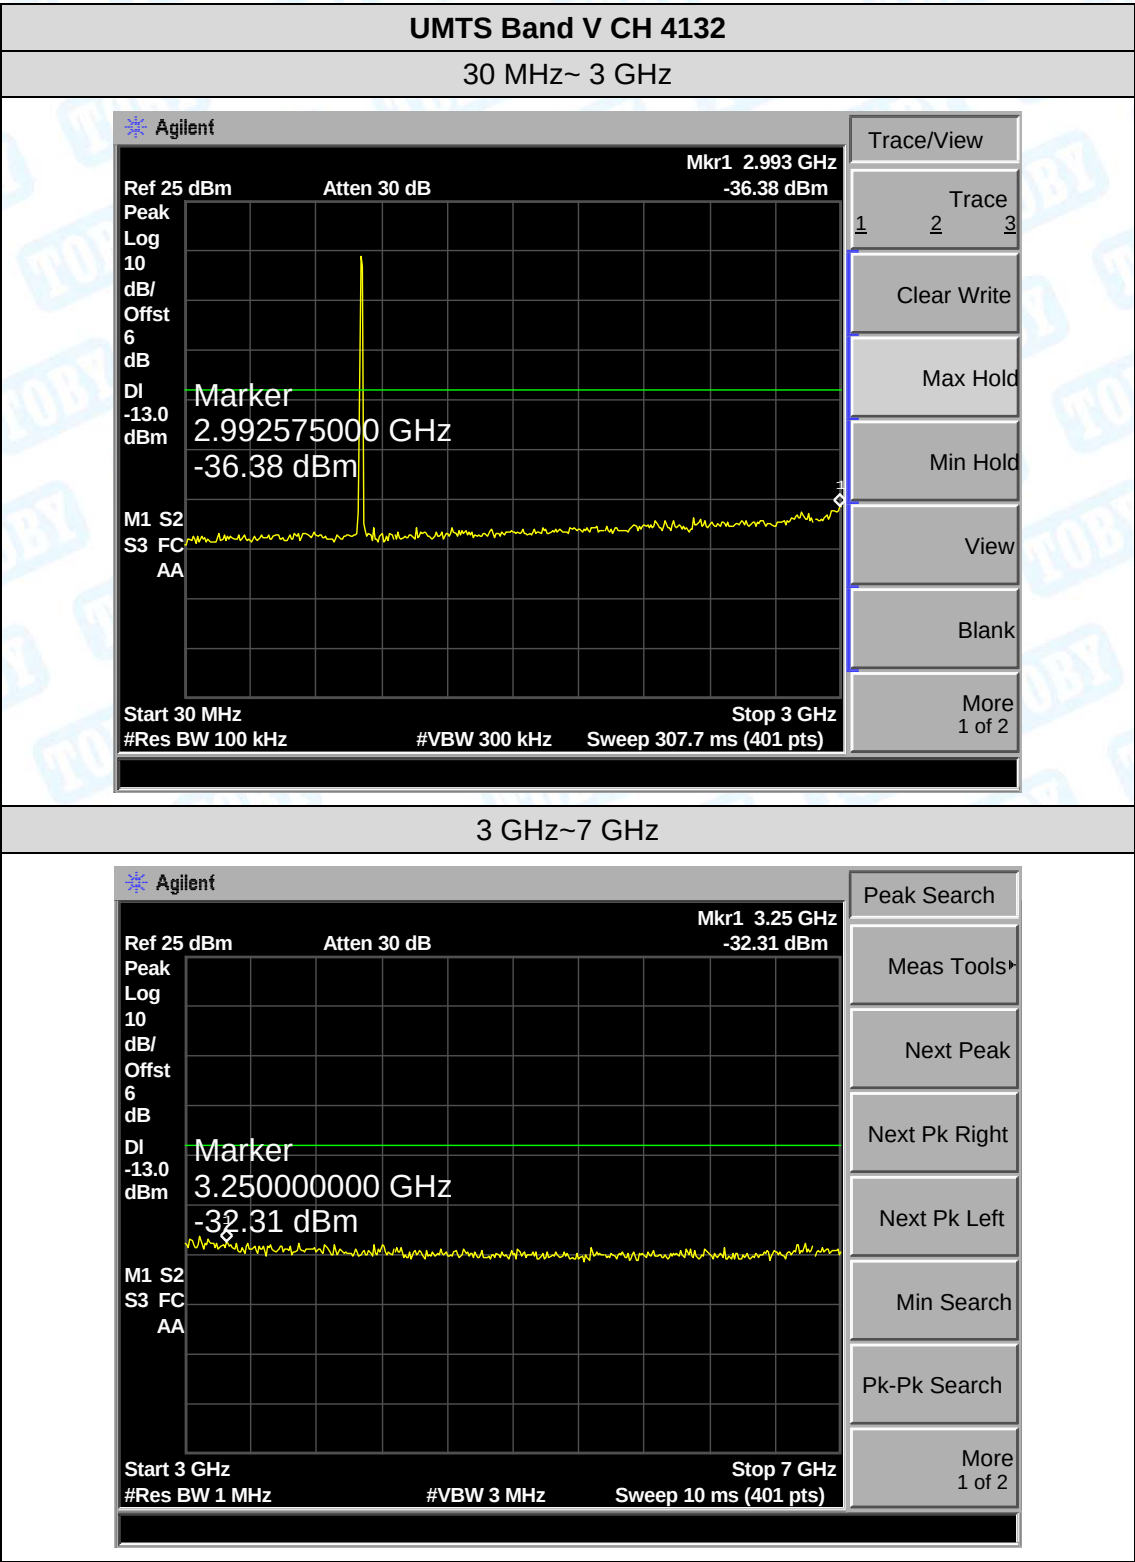


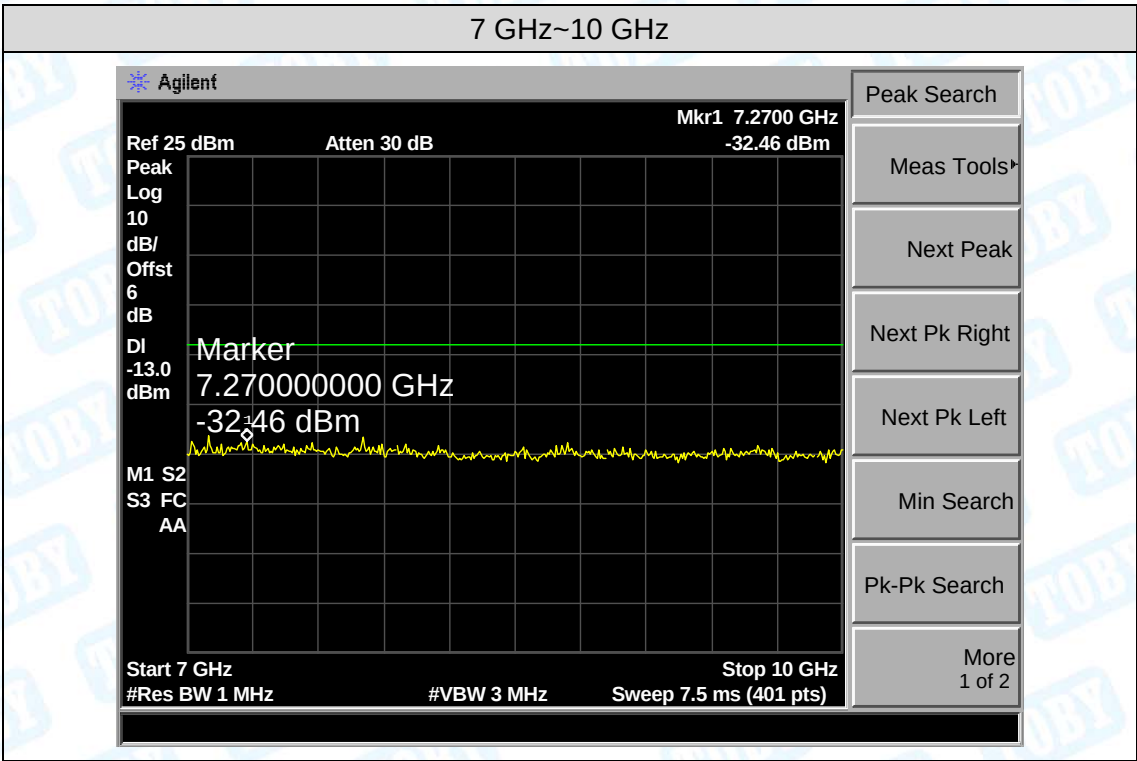


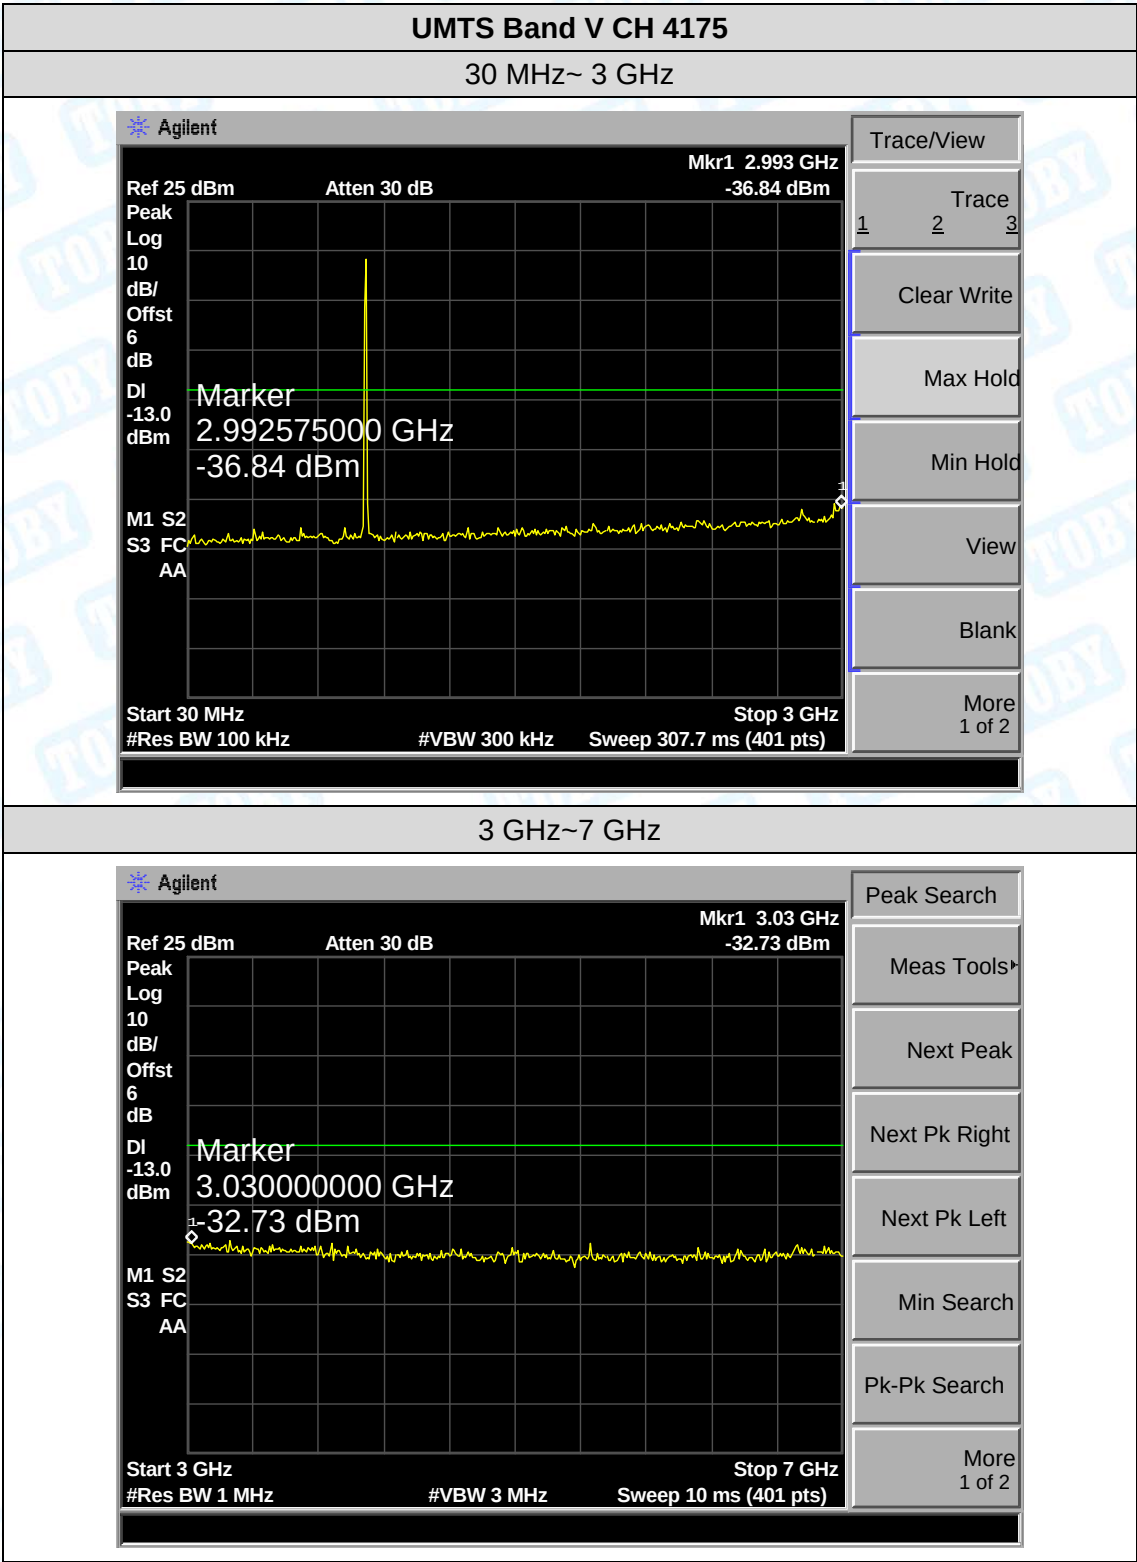


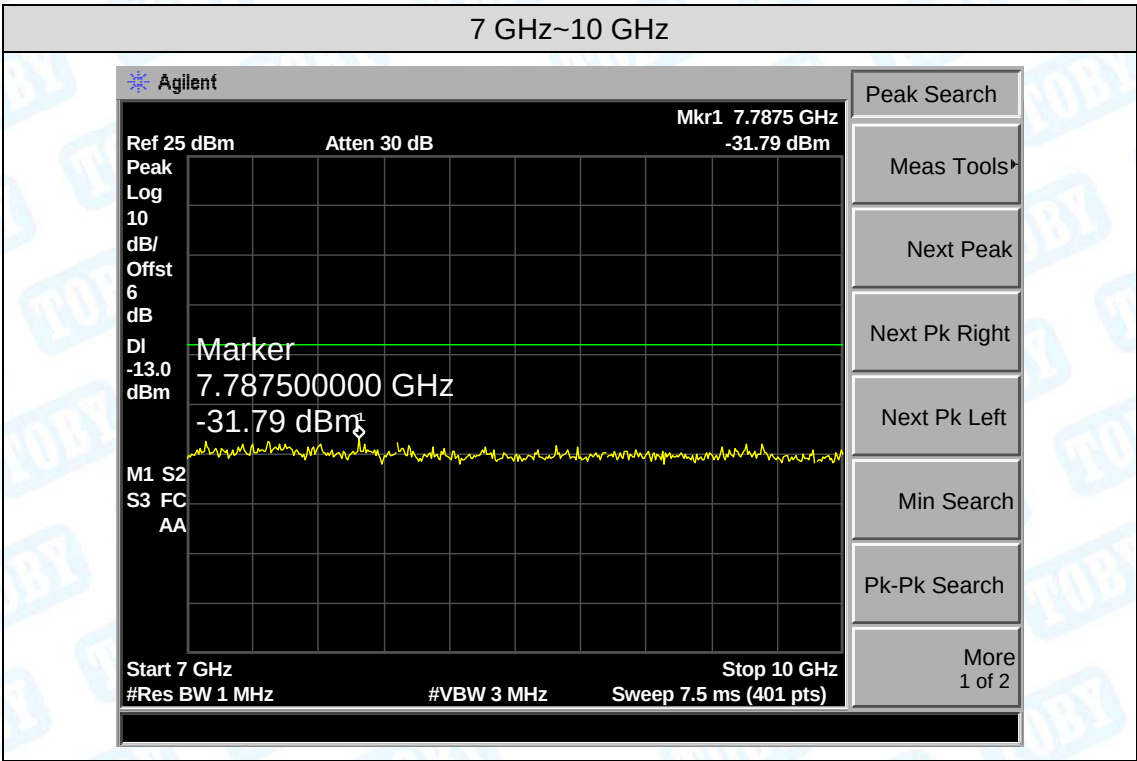


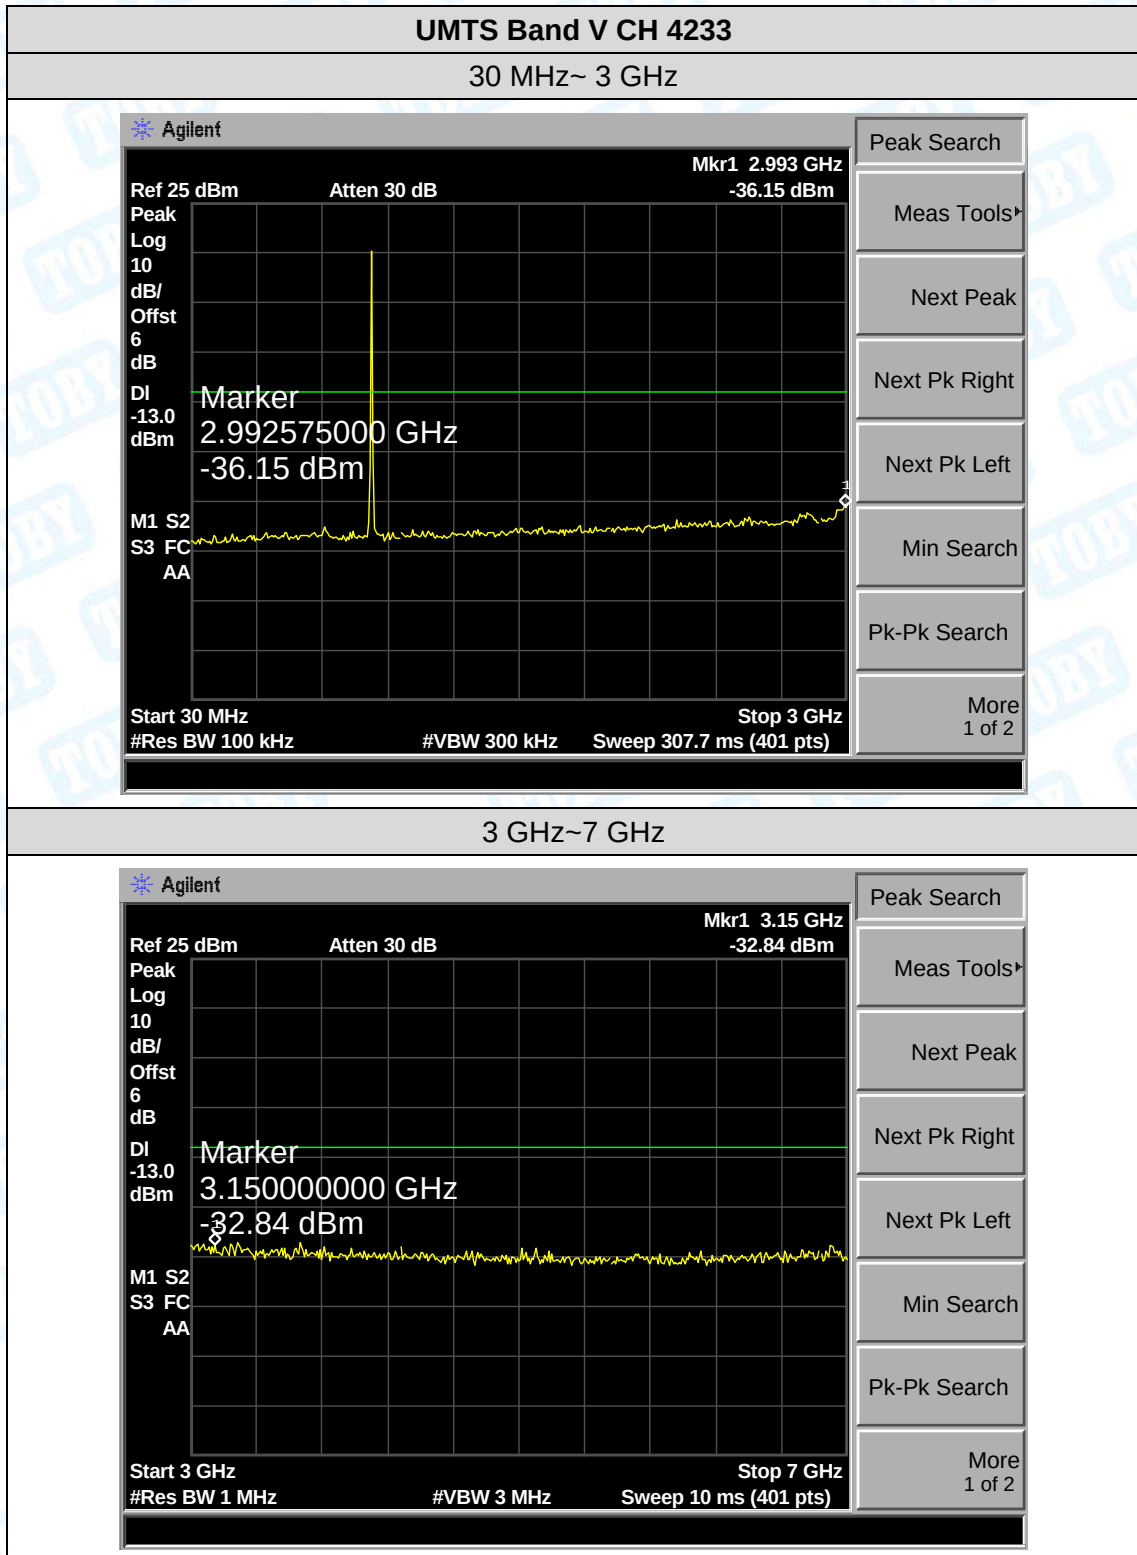


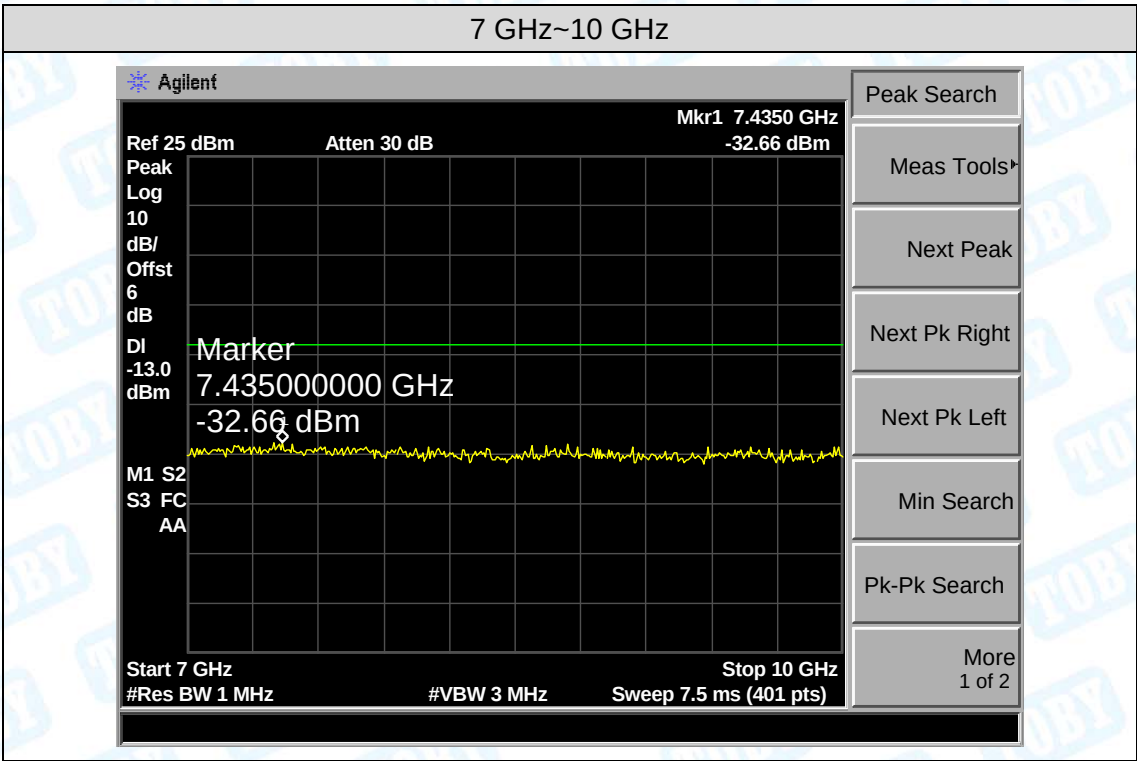


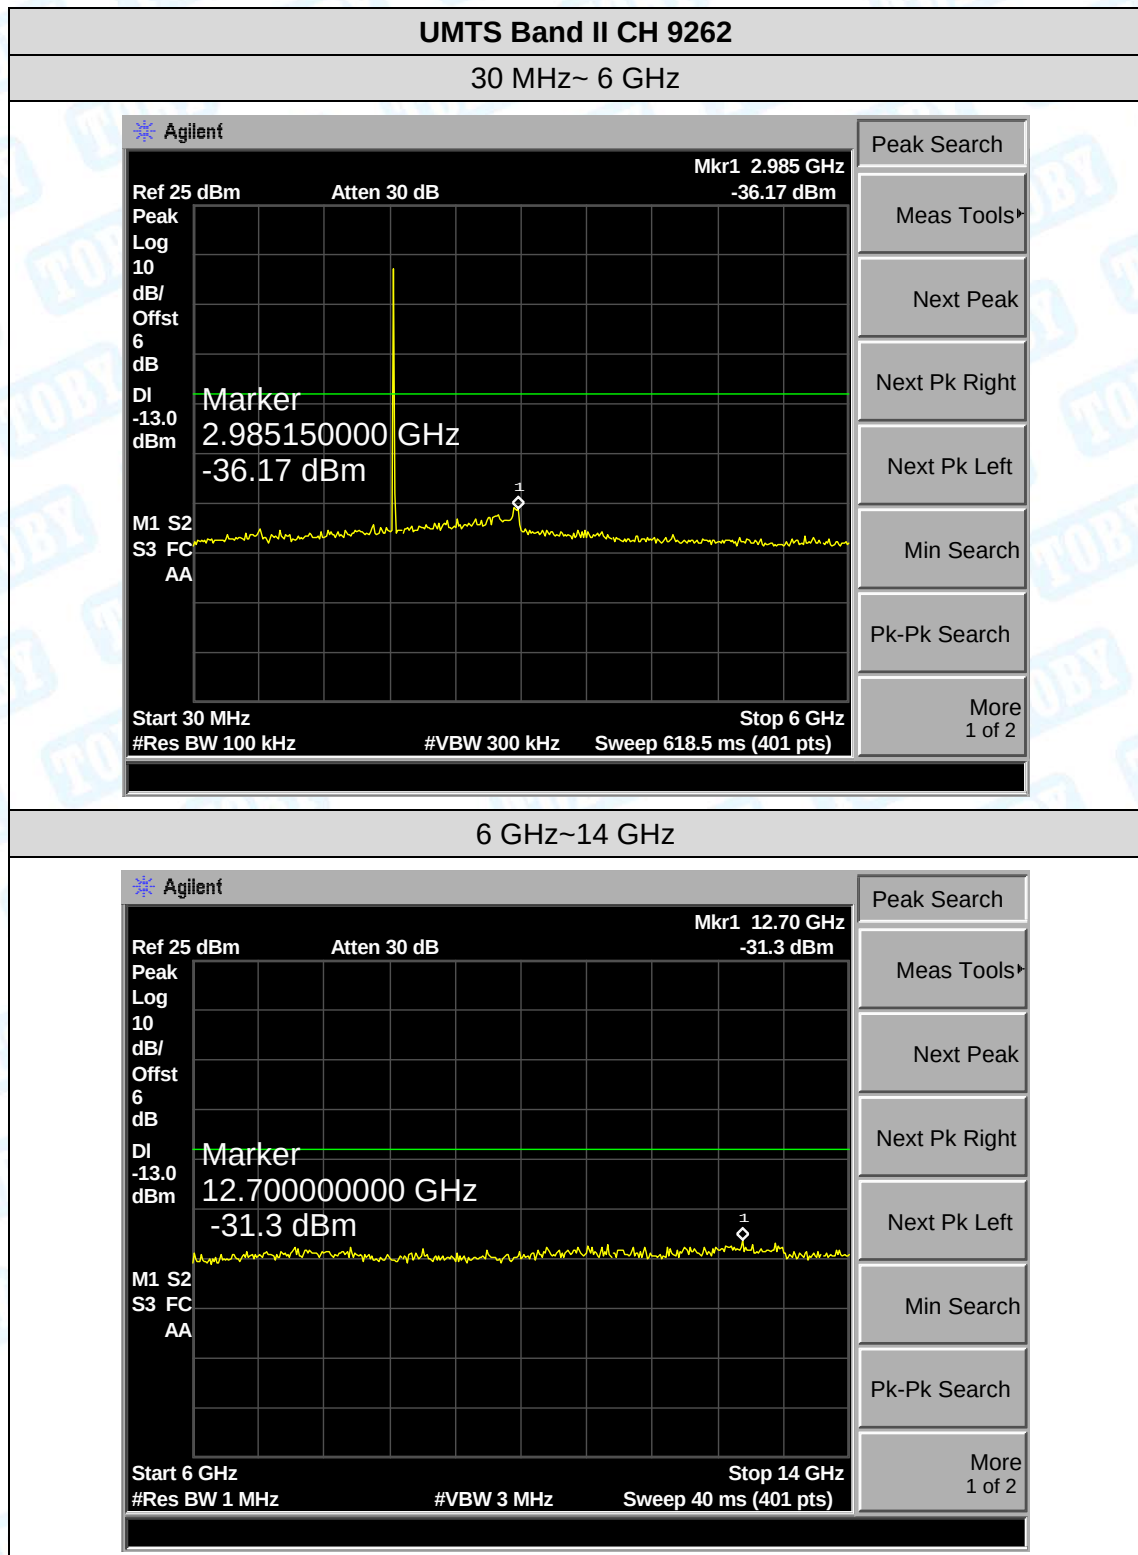


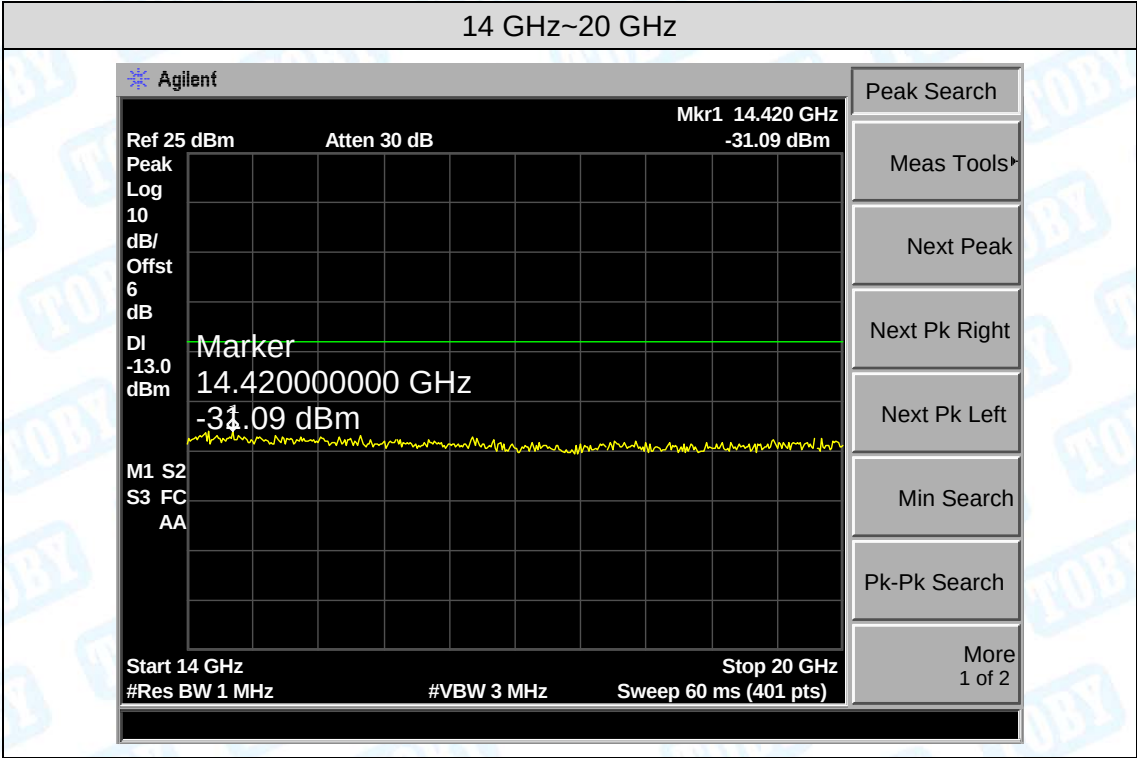

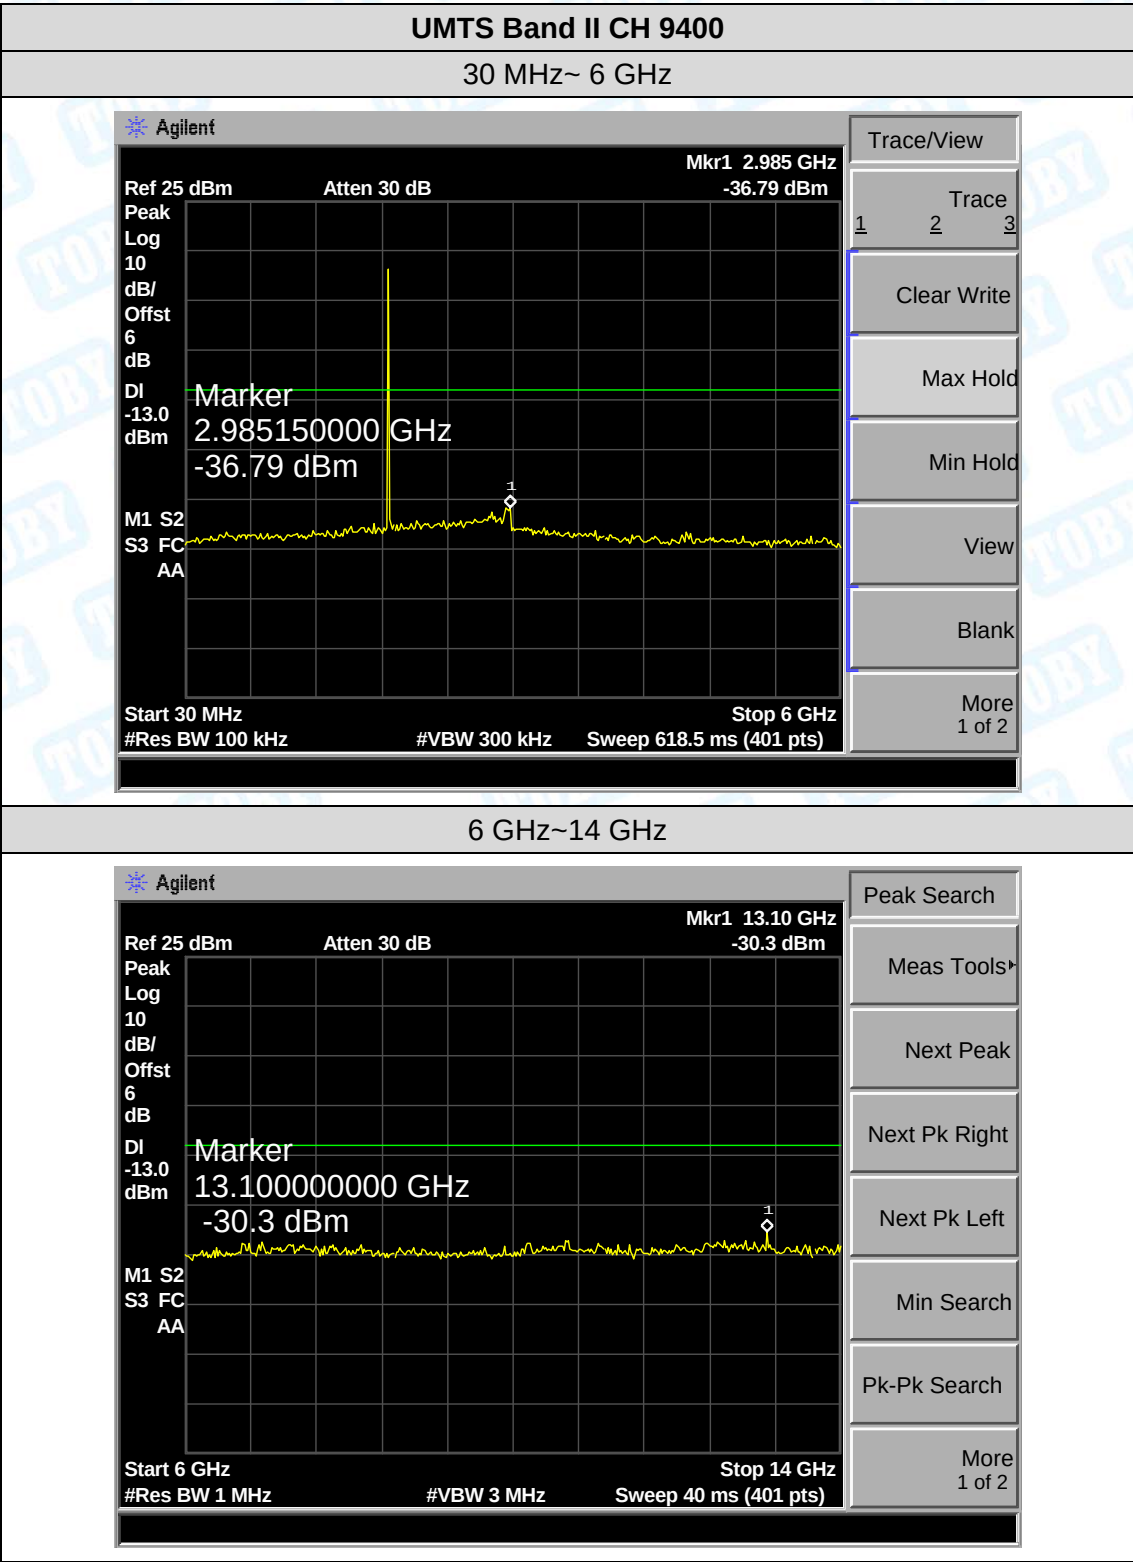

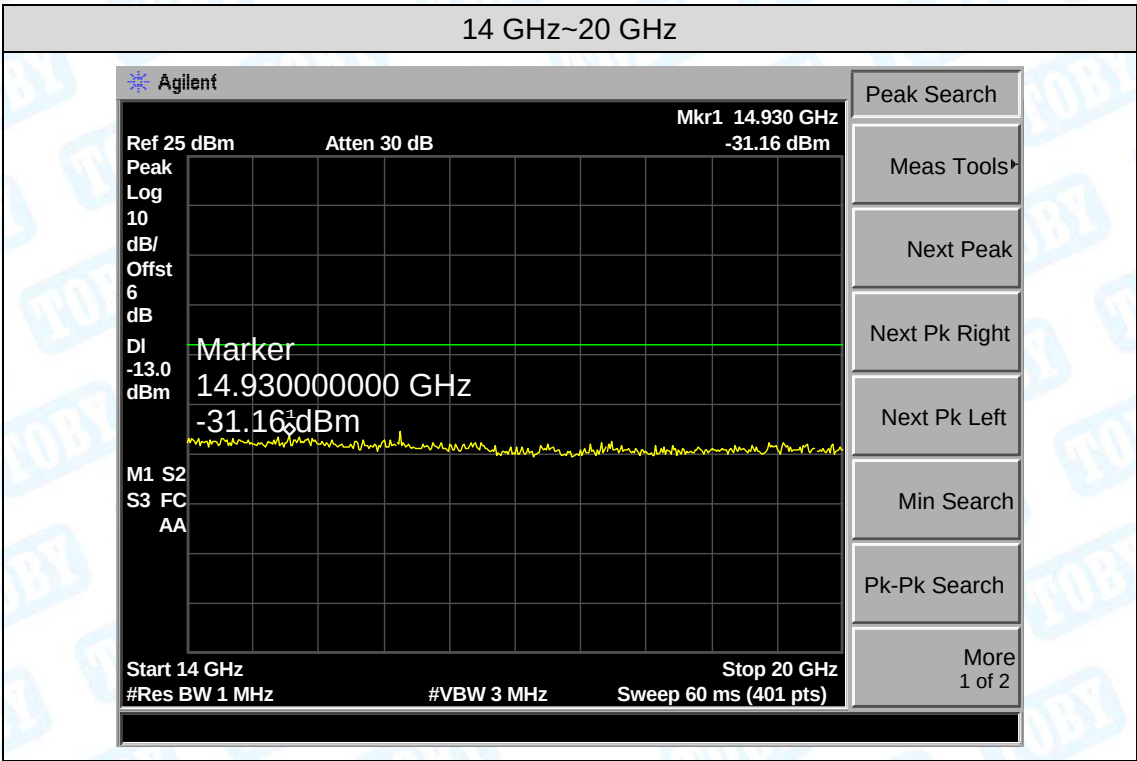

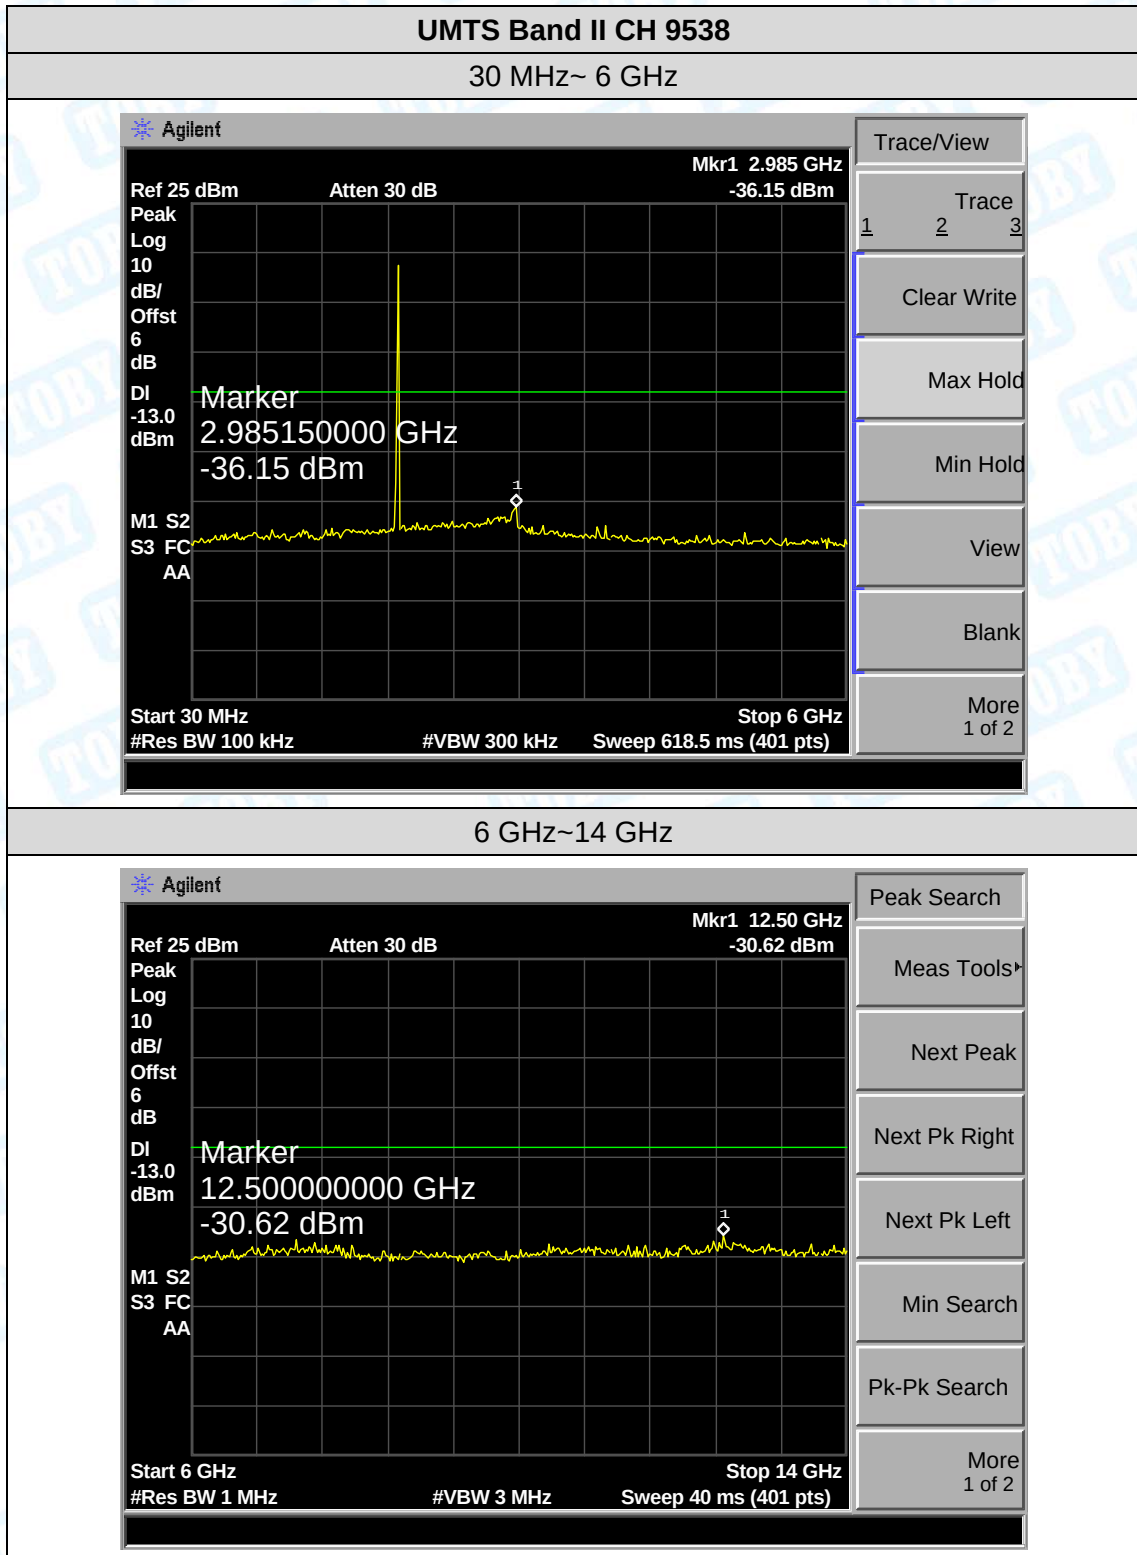


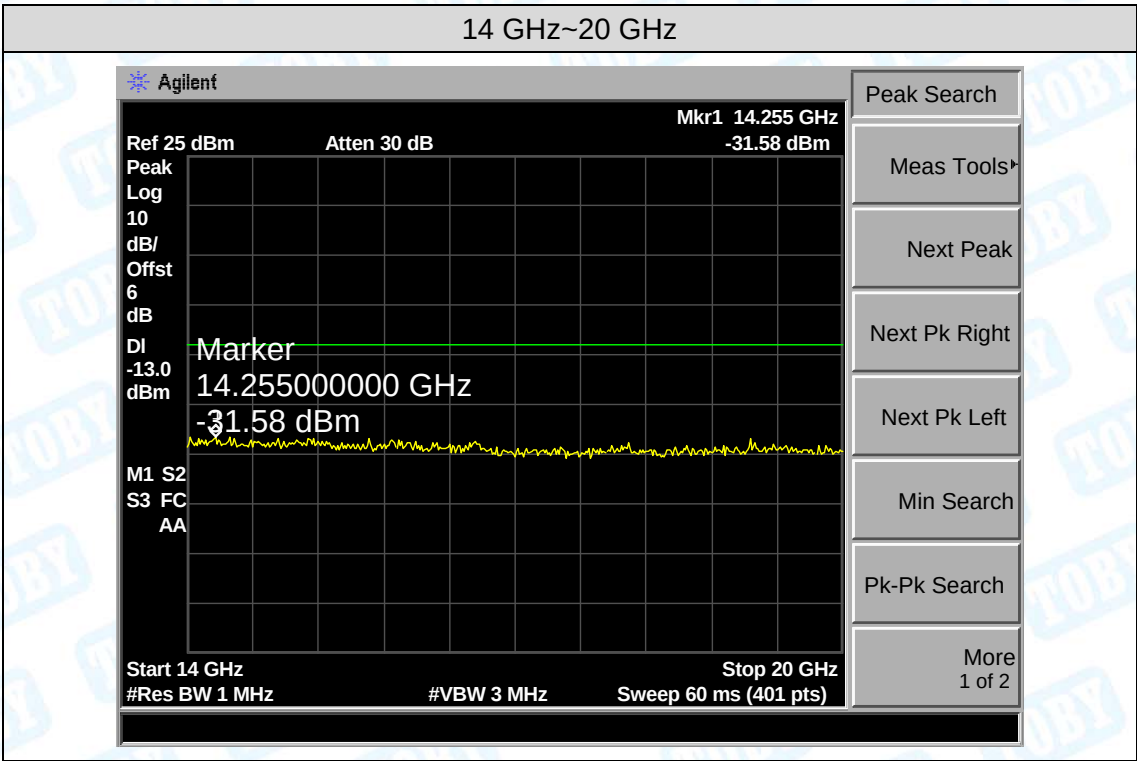


Attachment G-- Band Edge Test

Measurement Data (worst case)

Test Mode:	GSM 850
------------	---------

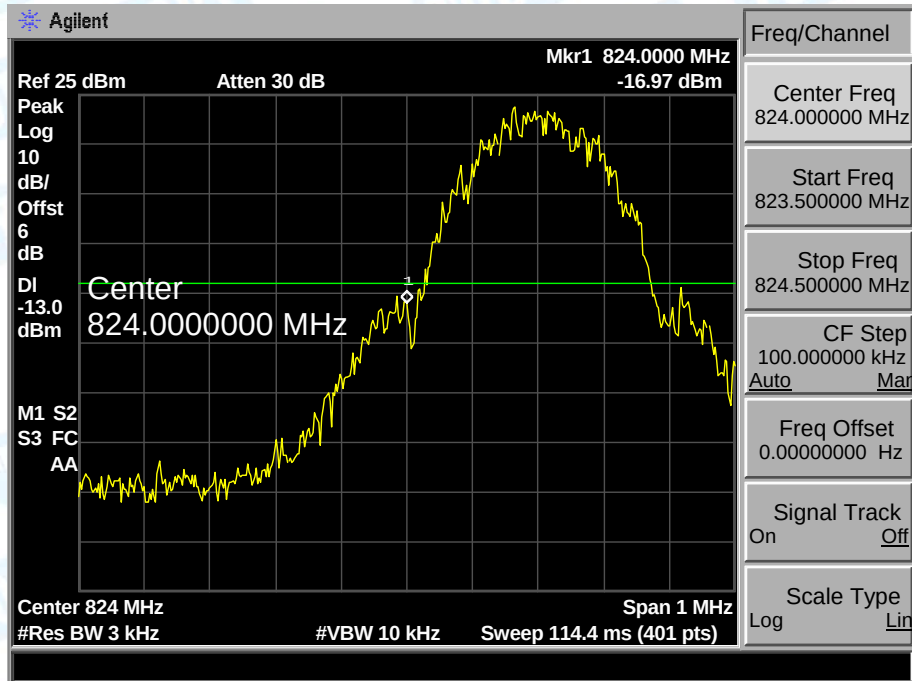


Lowest channel

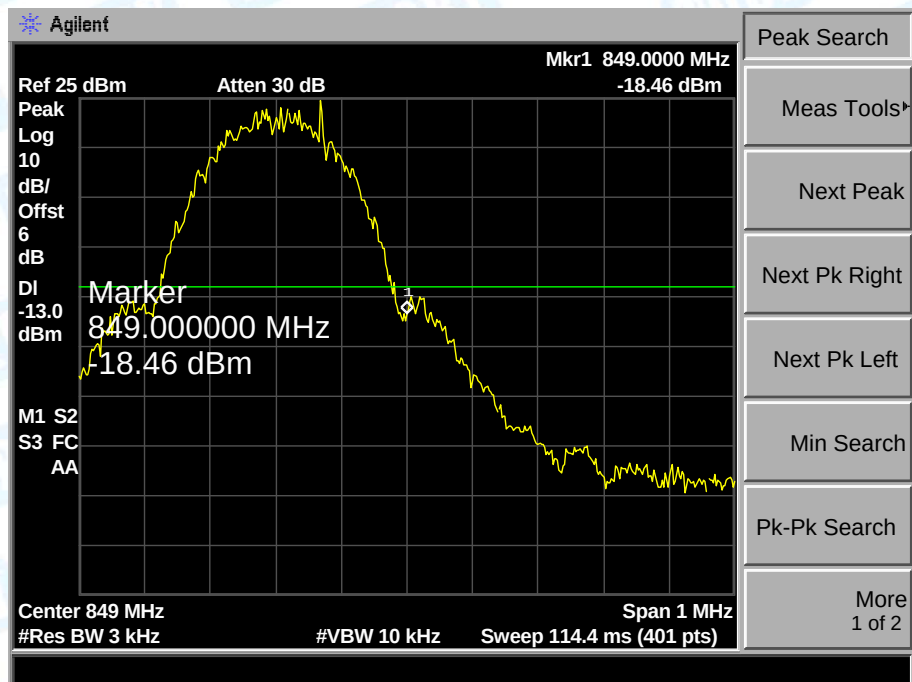


Highest channel

Test Mode:	GSM1900
------------	---------

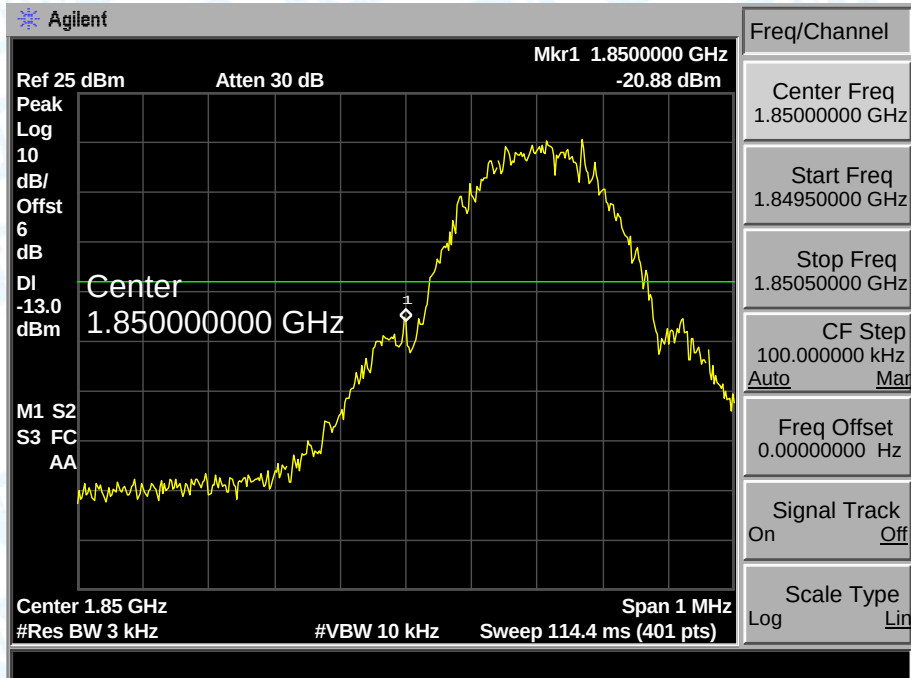


Lowest channel

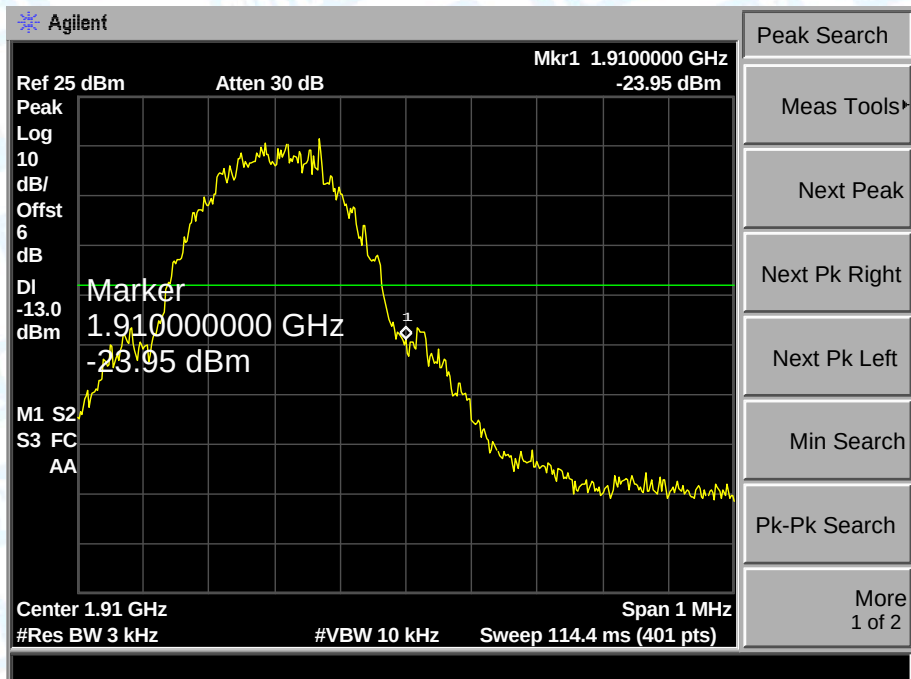


Highest channel

Test Mode:	UMTS Band V RMC
------------	-----------------

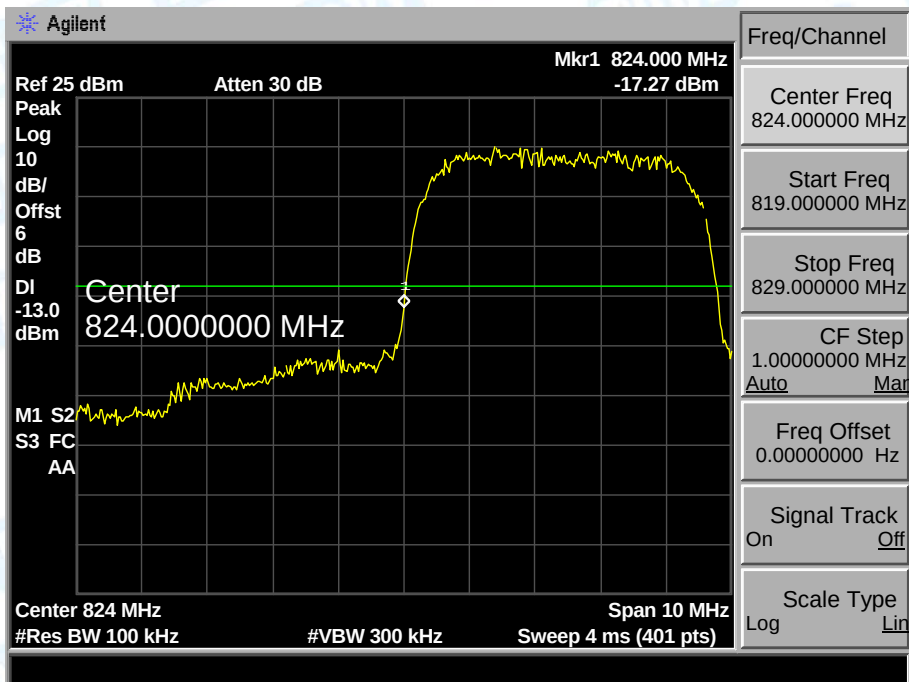


Lowest channel

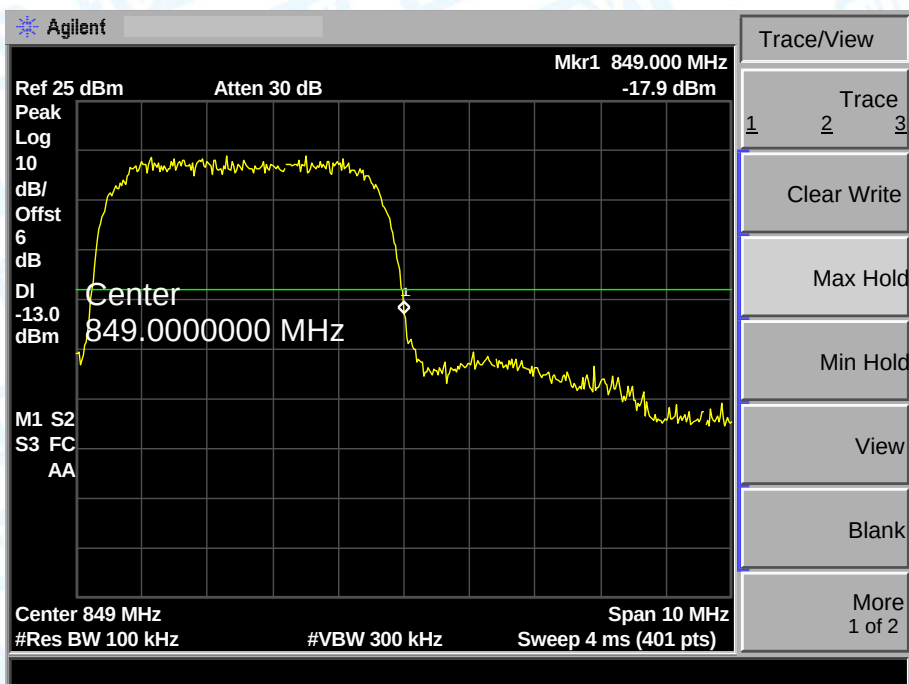


Highest channel

Test Mode:	UMTS Band II RMC
------------	------------------

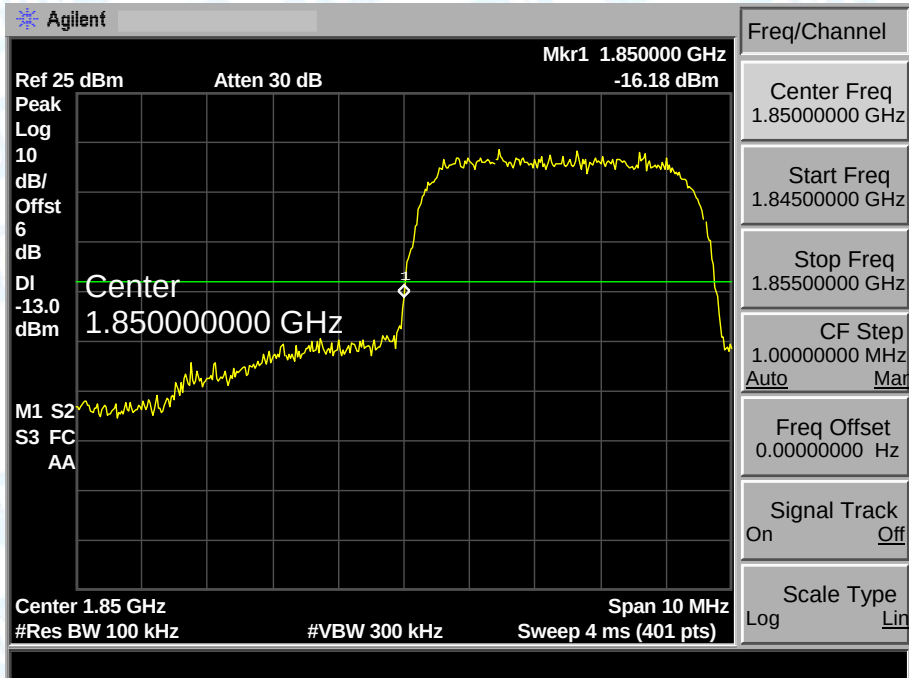

Lowest channel

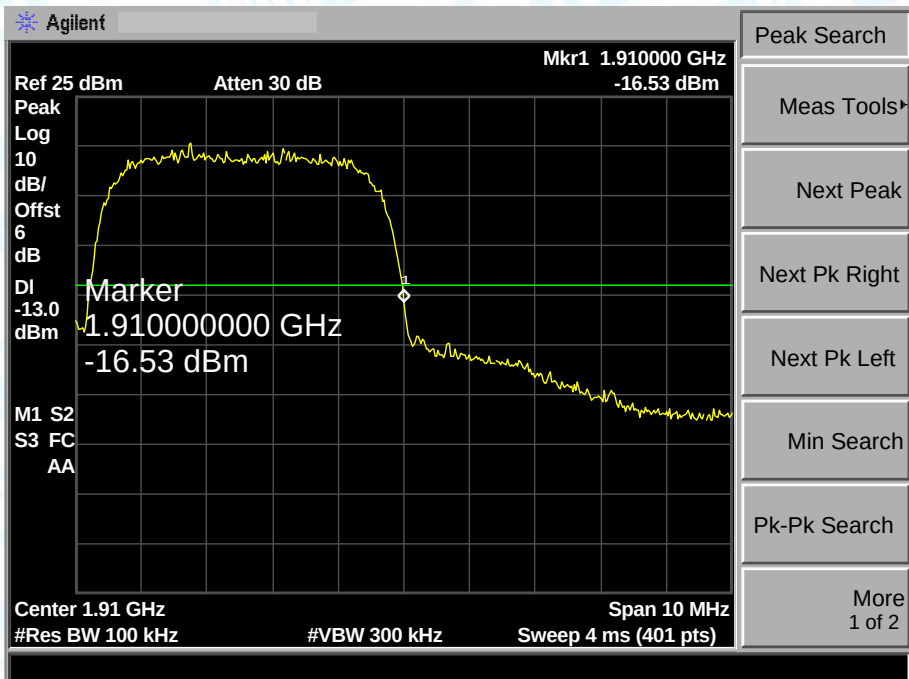

Highest channel

Attachment H--Radiated Out Band of Emissions

Measurement Data (worst case)

Test mode:	GSM 850						
Channel:	Middle			Date of Test:	2020-09-25		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-48.71	7.49	3.97	-37.25	-13.00	Pass
2509.80	H	-41.76	7.03	5.05	-29.68		
3346.40	H	-43.71	12.48	5.98	-25.25		
4183.00	H		---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-50.24	8.02	3.97	-38.25	-13.00	Pass
2509.80	V	-44.41	10.47	5.05	-28.89		
3346.40	V	-48.07	16.92	5.98	-25.17		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		
Remark: 1, The testing has been conformed to 10*836.6MHz=8,366MHz. 2, All other emissions more than 30 dB below the limit. 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss							

Test mode:	GSM 1900						
Channel:	Middle			Date of Test:	2020-09-25		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-65.03	14.94	6.24	-43.85	-13.00	Pass
5640.00	H	-56.54	13.87	7.98	-34.69		
7520.00	H	-49.91	14.49	9.68	-25.74		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-66.57	15.97	6.24	-44.36	-13.00	Pass
5640.00	V	-57.60	13.94	7.98	-35.68		
7520.00	V	-50.13	13.87	9.68	-26.58		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		
Remark: 1, The testing has been conformed to 10*1880.0MHz=18,800MHz. 2, All other emissions more than 30 dB below the limit. 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss							

Test mode:	UMTS Band V RMC						
Channel:	Middle			Date of Test:	2020-09-25		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-51.04	7.49	3.97	-39.58	-13.00	Pass
2509.80	H	-40.55	7.03	5.05	-28.47		
3346.40	H	-45.04	12.48	5.98	-26.58		
4183.00	H		---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-49.84	8.02	3.97	-37.85	-13.00	Pass
2509.80	V	-42.76	10.47	5.05	-27.24		
3346.40	V	-47.46	16.92	5.98	-24.56		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		
Remark: 1, The testing has been conformed to 10*836.6MHz=8,366MHz. 2, All other emissions more than 30 dB below the limit. 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss							

Test mode:	UMTS Band II RMC						
Channel:	Middle			Date of Test:	2020-09-25		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-62.43	14.94	6.24	-41.25	-13.00	Pass
5640.00	H	-58.20	13.87	7.98	-36.35		
7520.00	H	-51.42	14.49	9.68	-27.25		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-64.57	15.97	6.24	-42.36	-13.00	Pass
5640.00	V	-59.48	13.94	7.98	-37.56		
7520.00	V	-52.02	13.87	9.68	-28.47		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		
Remark: 1, The testing has been conformed to 10*1880.0MHz=18,800MHz. 2, All other emissions more than 30 dB below the limit. 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss							

-----End of the Report-----