





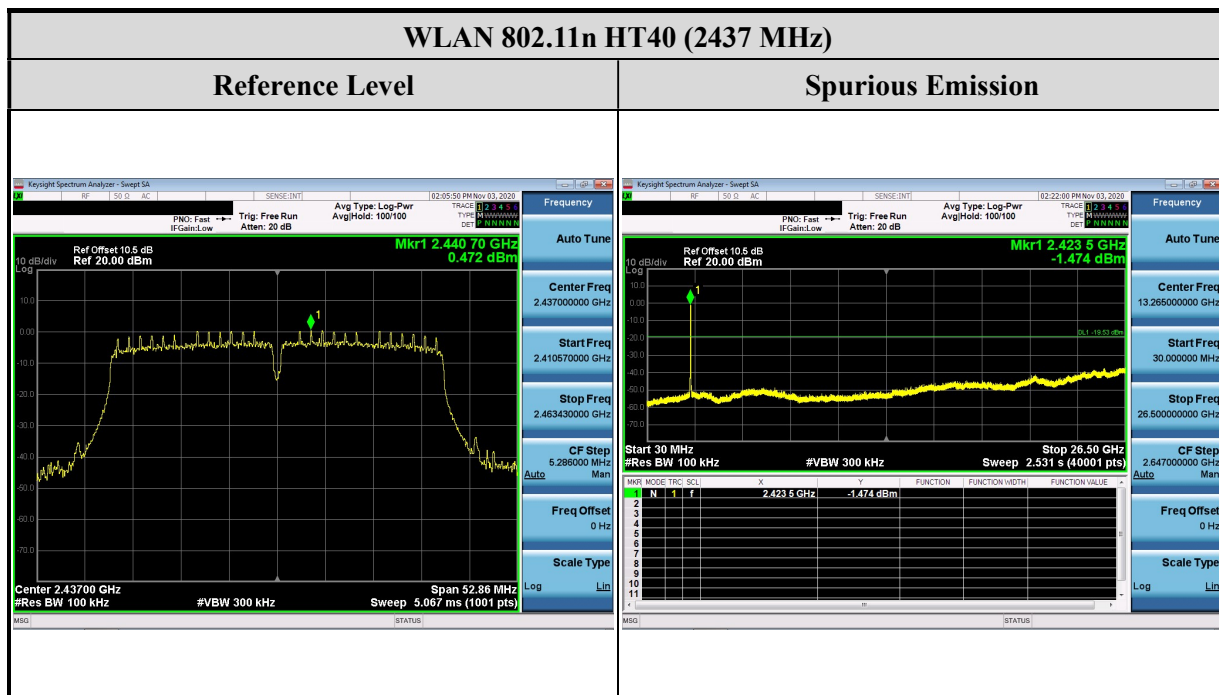


WLAN 802.11n HT40 (2452MHz)


Reference Level

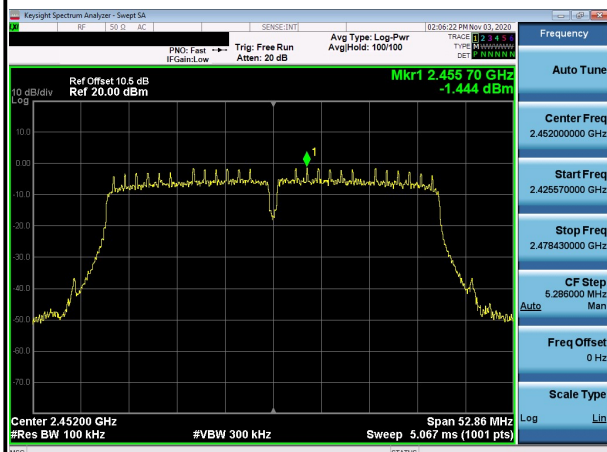

Spurious Emission

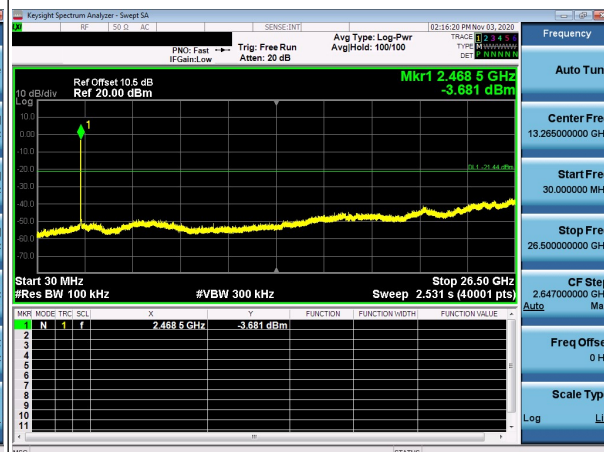

Band Edge

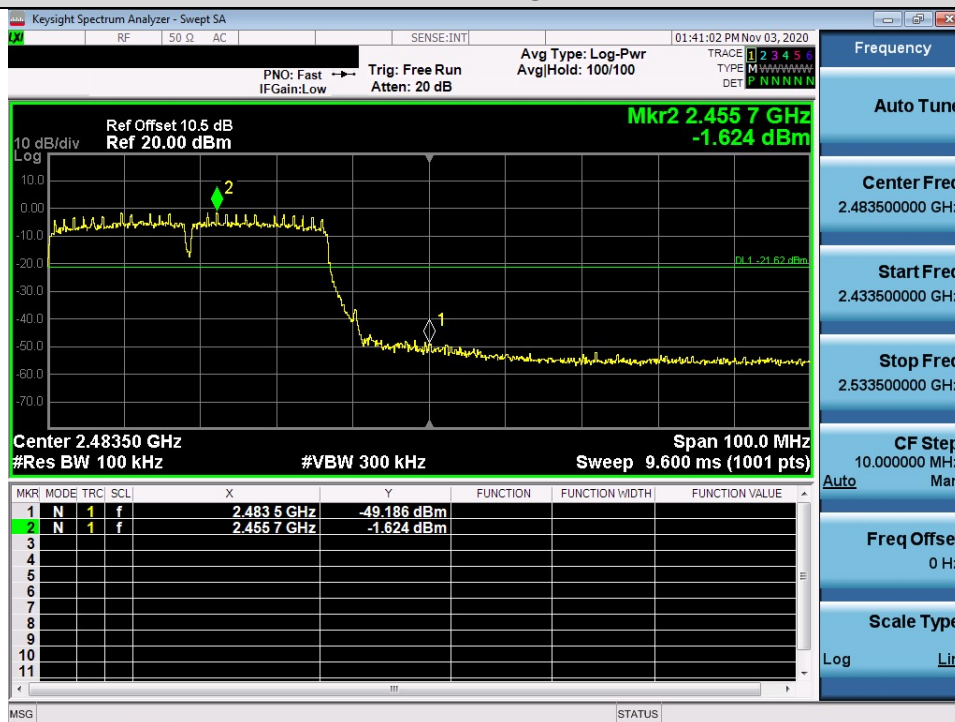

2.6 Radiated Band Edges and Spurious Emission Measurement

2.6.1 Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) = $20 \log \text{RF Voltage}(\mu\text{V})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

2.6.2 Test Setup


Below 30MHz

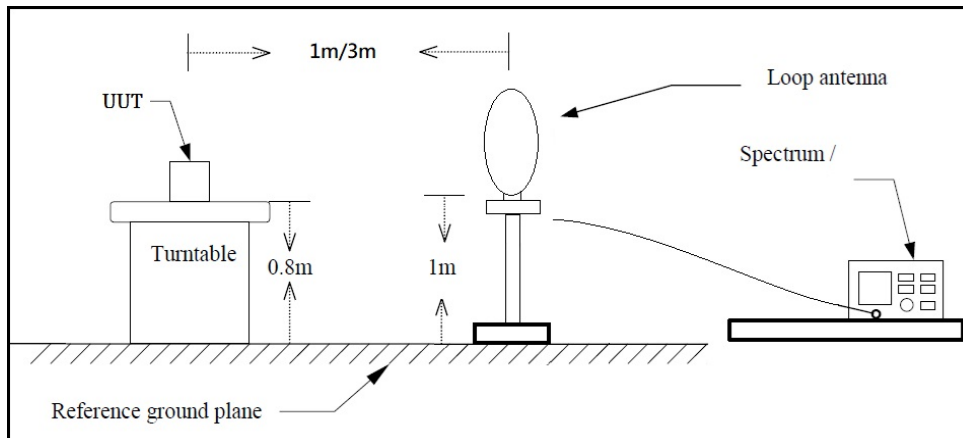

30MHz~1GHz

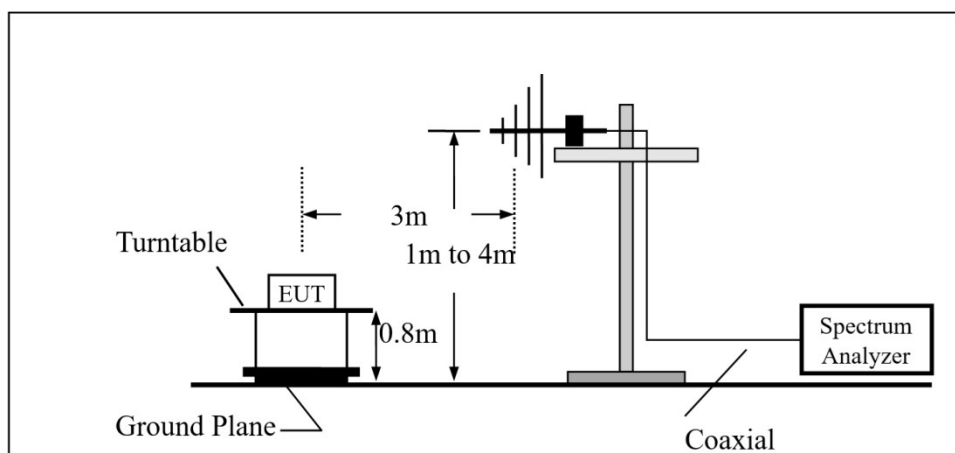

Above 1GHz

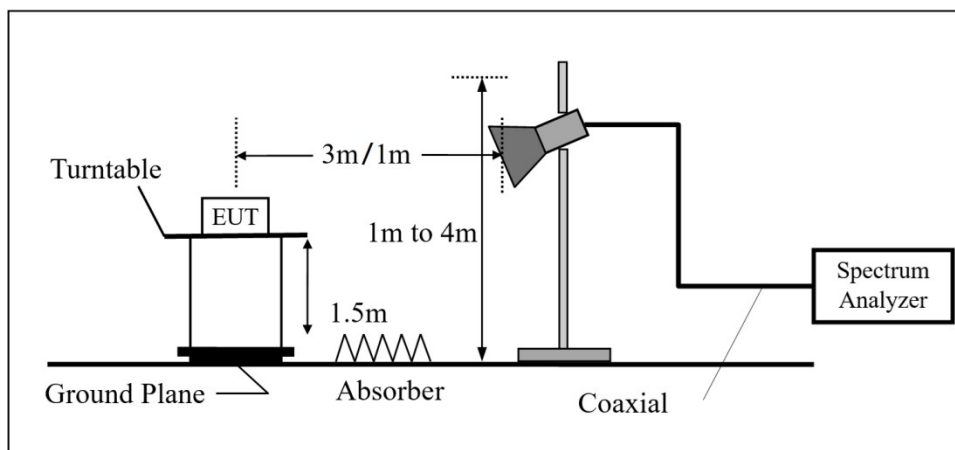

2.6.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

2.6.4 Duty Cycle


Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	2412	1.000	1.000	1.000	0.000	0.010
802.11g	2412	2.075	2.140	0.970	0.134	0.482
802.11n HT20	2412	1.940	2.040	0.951	0.218	0.515
802.11n HT40	2422	0.960	1.075	0.893	0.491	1.042

2.6.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency		
RF	802.11b / 802.11g / 802.11n HT20	802.11n HT40
Tx	CH01 (2412MHz)	CH03 (2422MHz)
	CH11 (2462MHz)	CH09 (2452MHz)

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

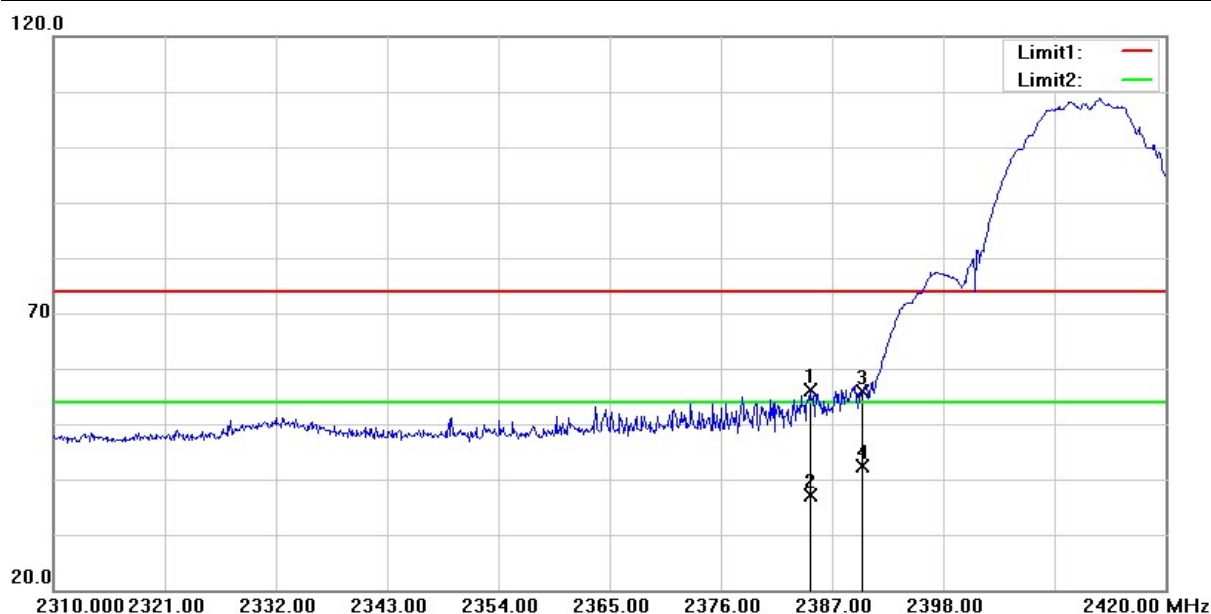

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.800	61.66	-5.54	56.12	74.00	-17.88	peak
2	2384.800	42.56	-5.54	37.02	54.00	-16.98	AVG
3	2390.000	61.50	-5.55	55.95	74.00	-18.05	peak
4	2390.000	47.85	-5.55	42.30	54.00	-11.70	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.690	56.80	-5.54	51.26	74.00	-22.74	peak
2	2390.000	55.17	-5.55	49.62	74.00	-24.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/29
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

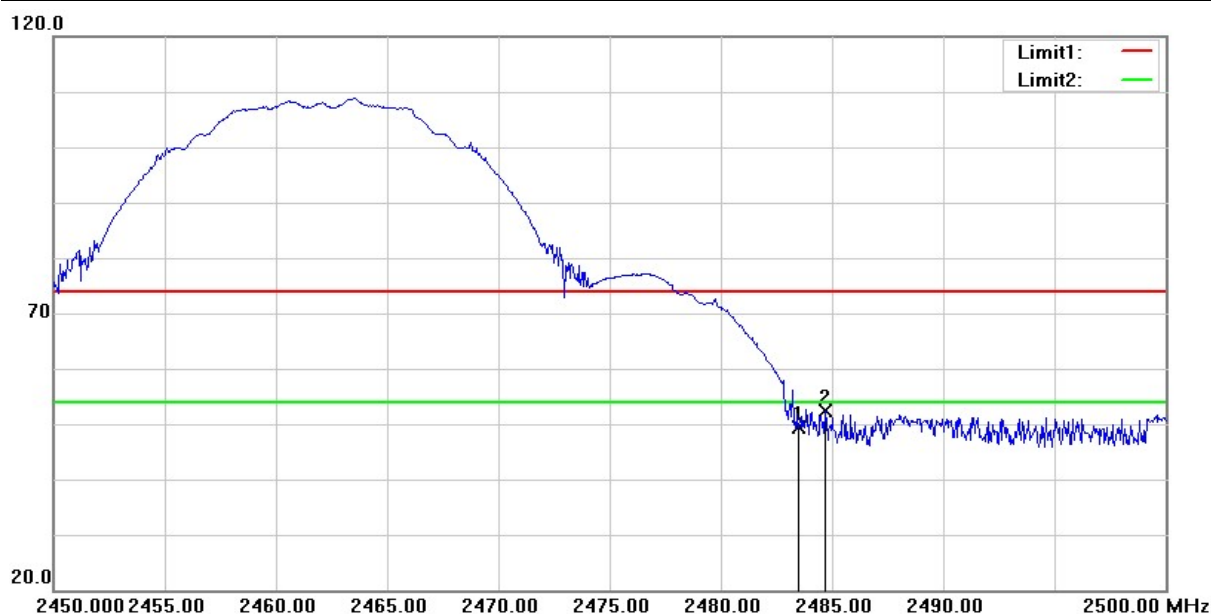


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.05	-5.66	49.39	74.00	-24.61	peak
2	2484.700	57.90	-5.64	52.26	74.00	-21.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/29
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

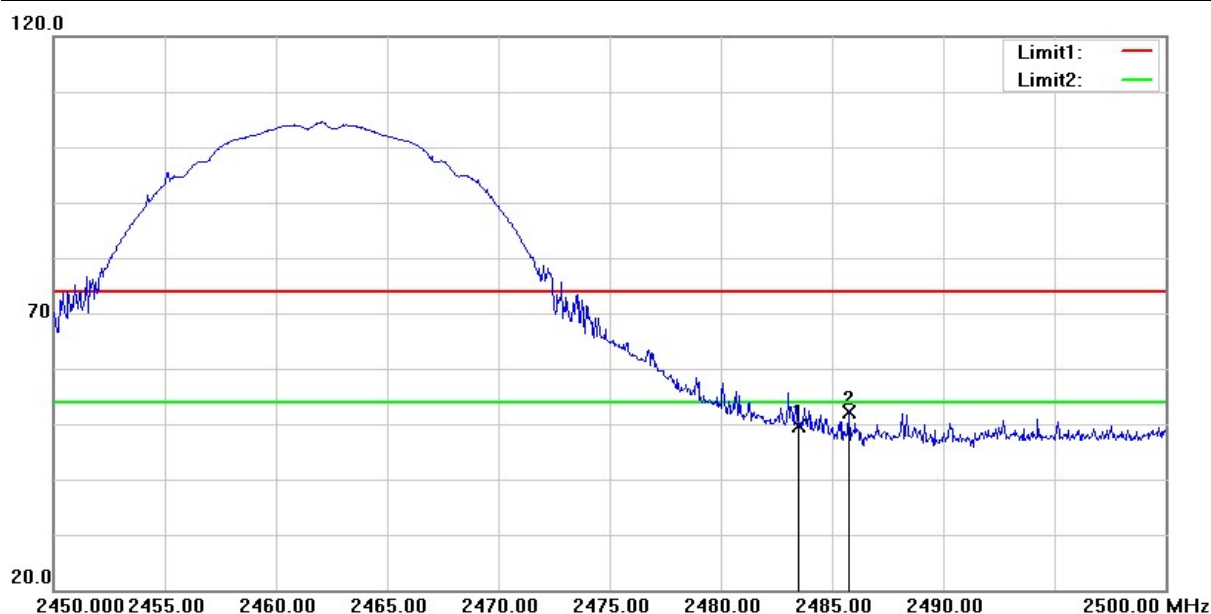


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.37	-5.66	49.71	74.00	-24.29	peak
2	2485.750	57.66	-5.64	52.02	74.00	-21.98	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

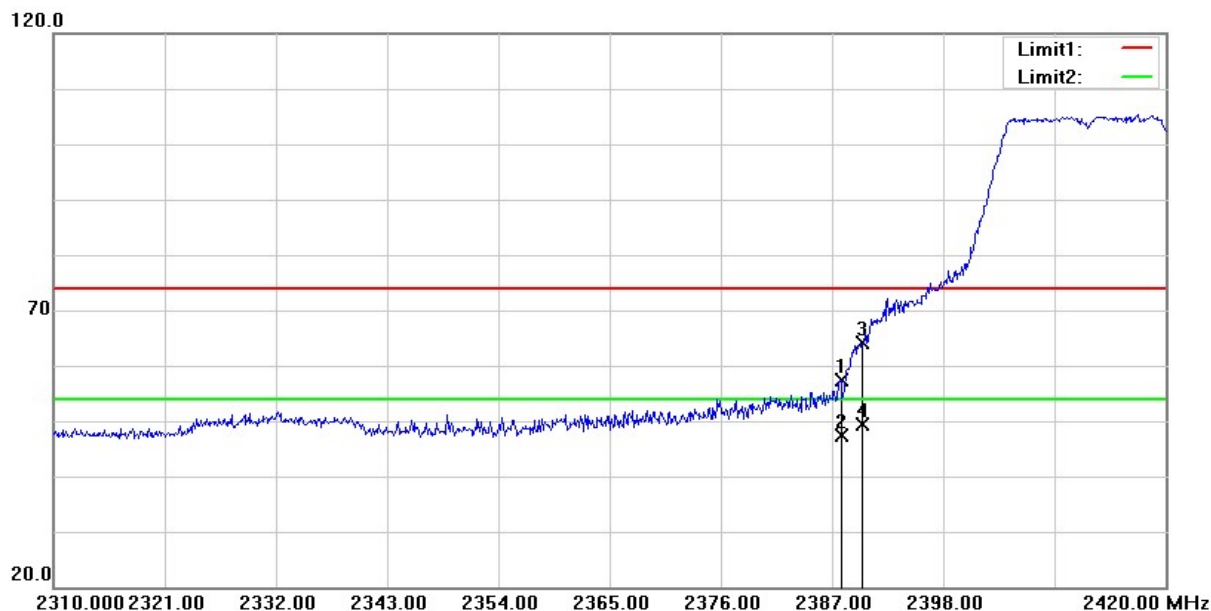


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.880	62.89	-5.55	57.34	74.00	-16.66	peak
2	2387.880	52.90	-5.55	47.35	54.00	-6.65	AVG
3	2390.000	69.62	-5.55	64.07	74.00	-9.93	peak
4	2390.000	54.82	-5.55	49.27	54.00	-4.73	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

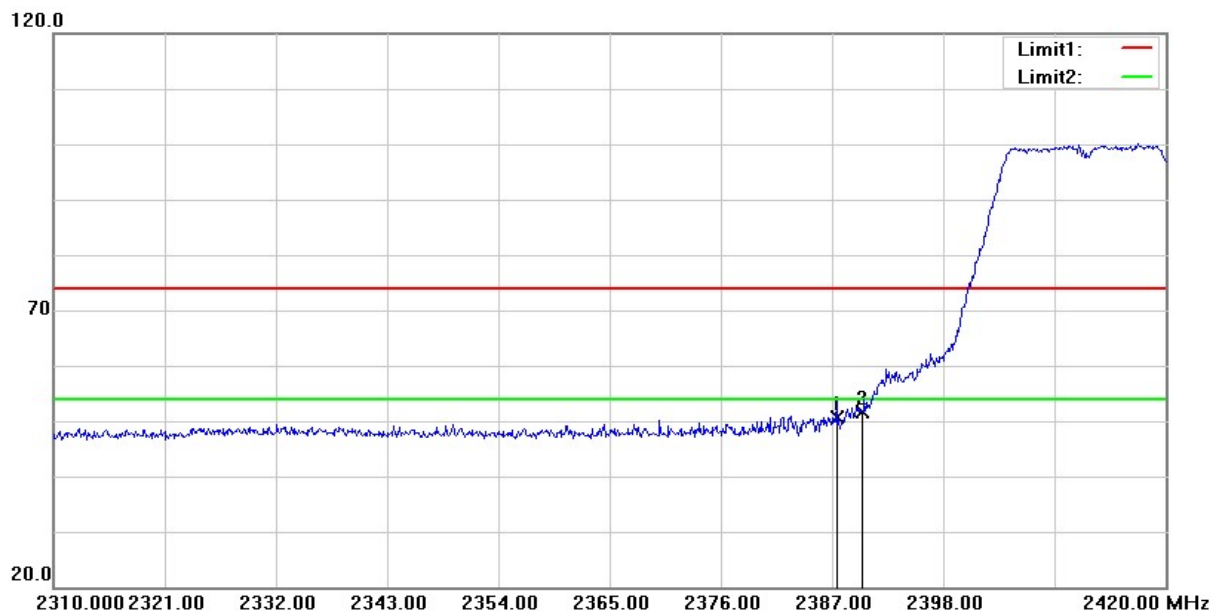


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.440	56.15	-5.54	50.61	74.00	-23.39	peak
2	2390.000	57.17	-5.55	51.62	74.00	-22.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/29
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

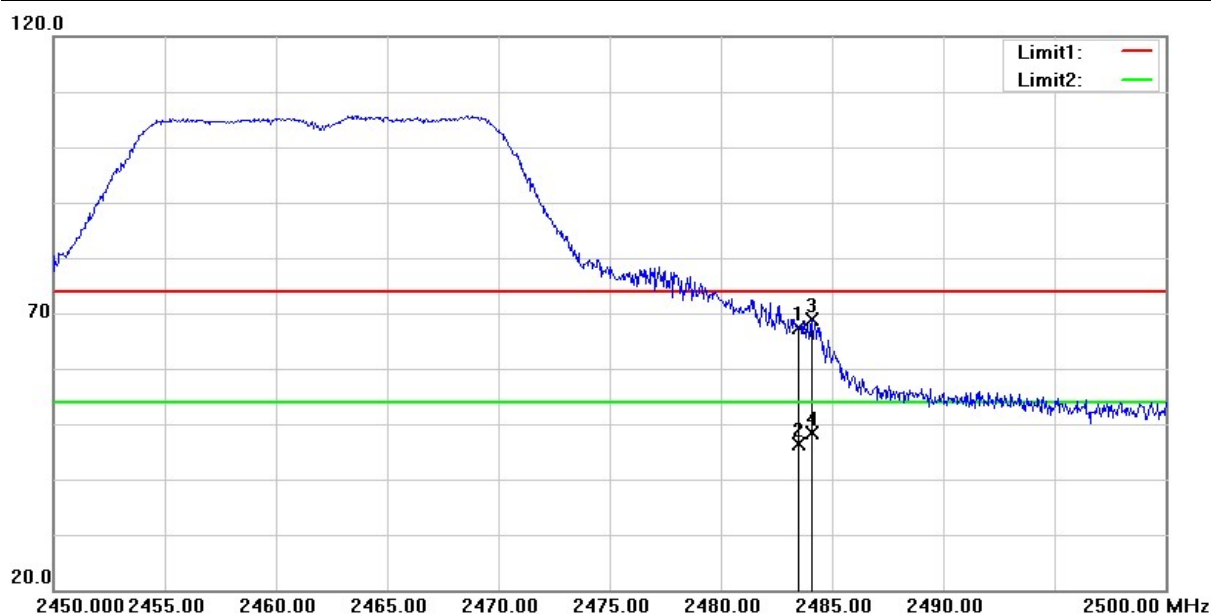


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	72.94	-5.66	67.28	74.00	-6.72	peak
2	2483.500	51.96	-5.66	46.30	54.00	-7.70	AVG
3	2484.100	74.56	-5.64	68.92	74.00	-5.08	peak
4	2484.100	53.94	-5.64	48.30	54.00	-5.70	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/29
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

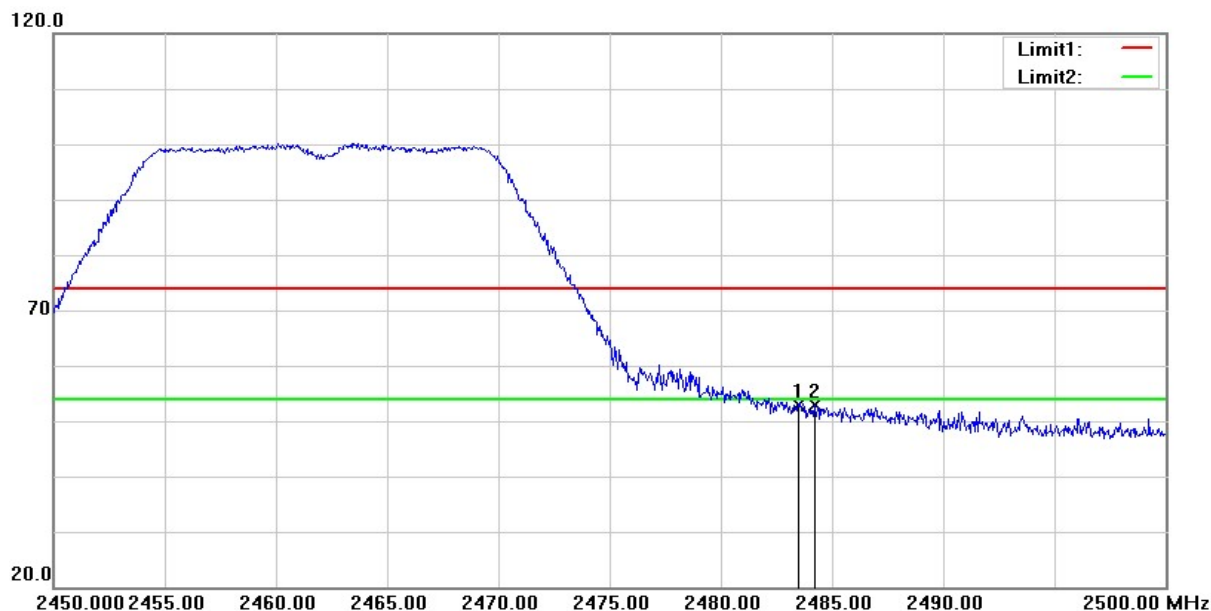


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.46	-5.66	52.80	74.00	-21.20	peak
2	2484.250	58.61	-5.64	52.97	74.00	-21.03	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

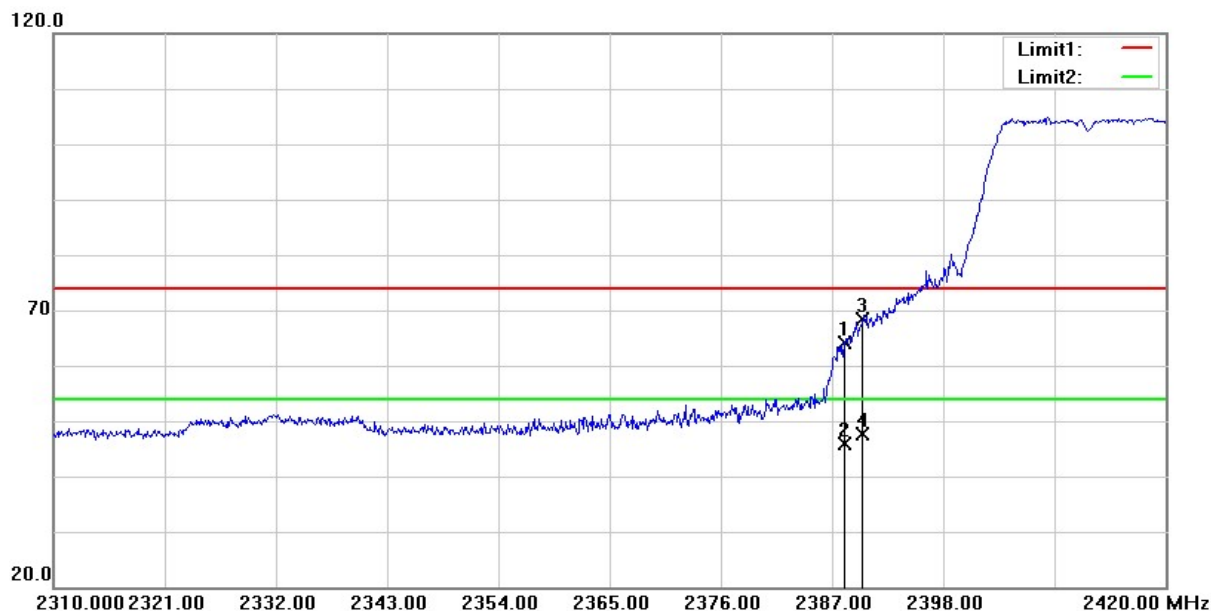

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.210	69.77	-5.55	64.22	74.00	-9.78	peak
2	2388.210	51.41	-5.55	45.86	54.00	-8.14	AVG
3	2390.000	73.99	-5.55	68.44	74.00	-5.56	peak
4	2390.000	53.18	-5.55	47.63	54.00	-6.37	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/29
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	60.25	-5.55	54.70	74.00	-19.30	peak
2	2389.310	51.83	-5.55	46.28	54.00	-7.72	AVG
3	2390.000	58.07	-5.55	52.52	74.00	-21.48	peak
4	2390.000	50.22	-5.55	44.67	54.00	-9.33	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

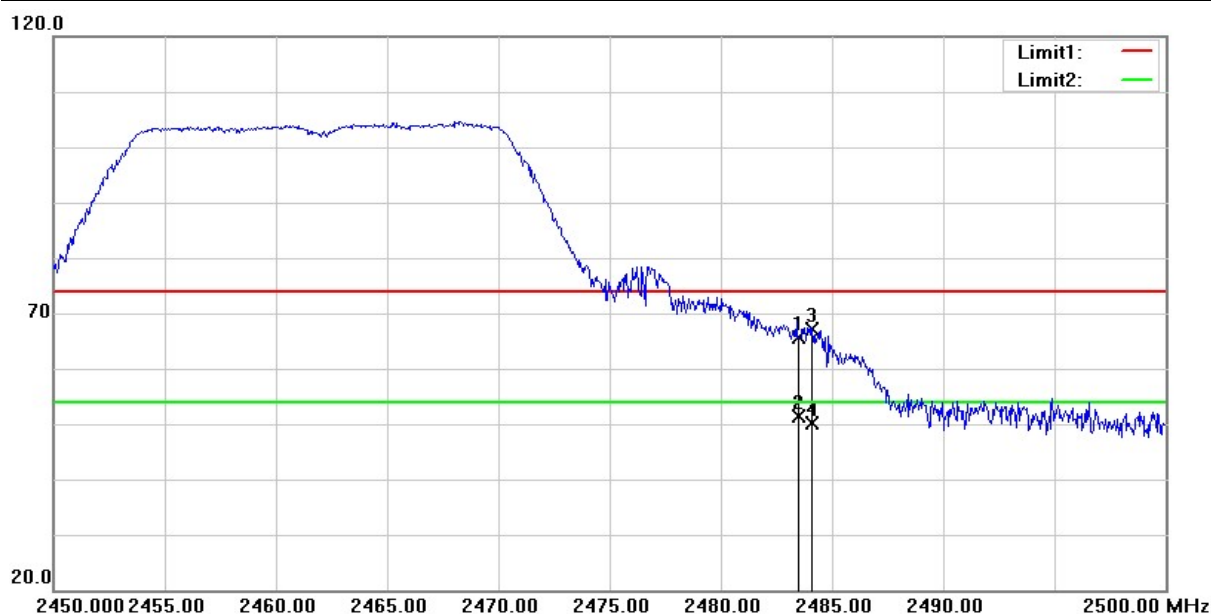


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	71.18	-5.66	65.52	74.00	-8.48	peak
2	2483.500	57.05	-5.66	51.39	54.00	-2.61	AVG
3	2484.100	72.81	-5.64	67.17	74.00	-6.83	peak
4	2484.100	55.73	-5.64	50.09	54.00	-3.91	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

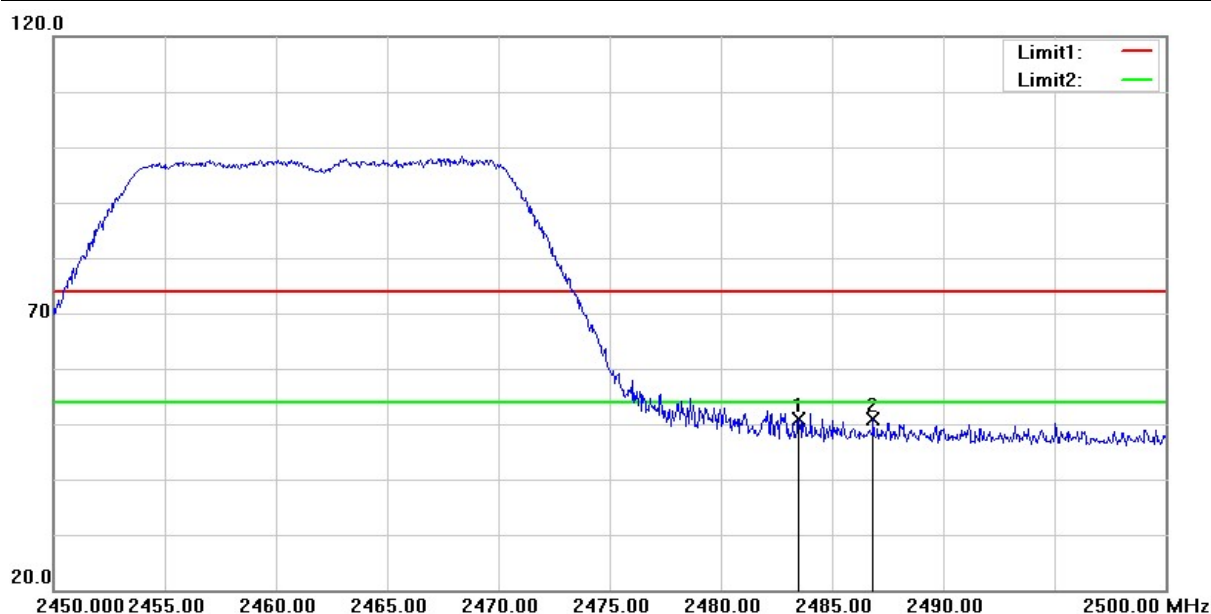


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.52	-5.66	50.86	74.00	-23.14	peak
2	2486.850	56.52	-5.64	50.88	74.00	-23.12	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/29
Test Channel :	CH03(2422MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

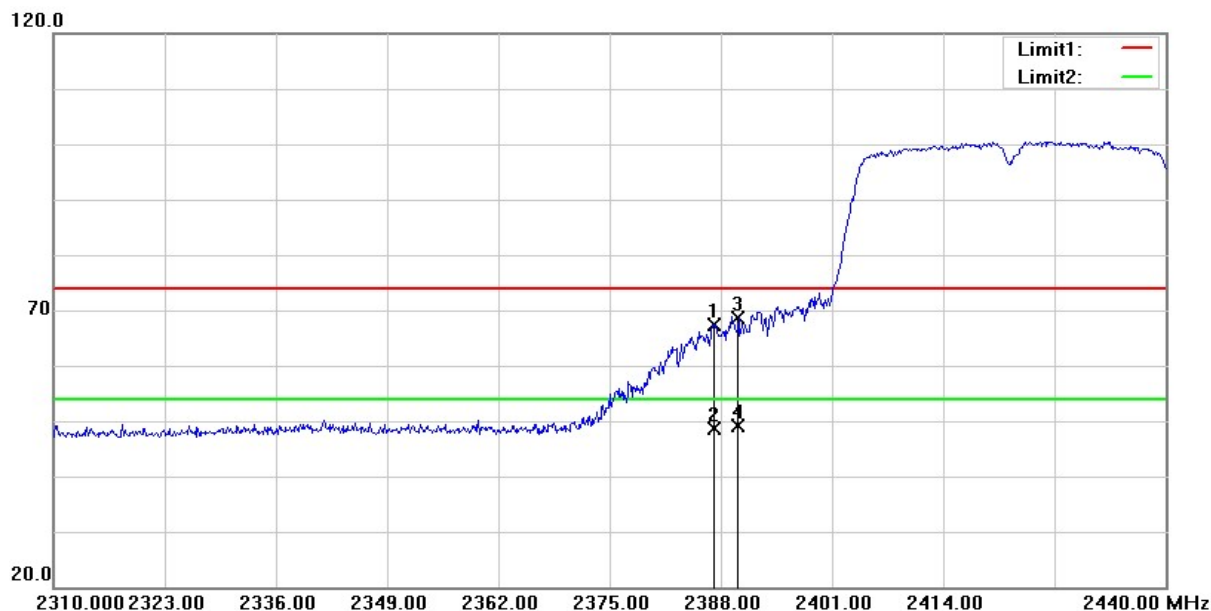


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.220	73.02	-5.54	67.48	74.00	-6.52	peak
2	2387.220	54.27	-5.54	48.73	54.00	-5.27	AVG
3	2390.000	74.29	-5.55	68.74	74.00	-5.26	peak
4	2390.000	54.56	-5.55	49.01	54.00	-4.99	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/29
Test Channel :	CH03(2422MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

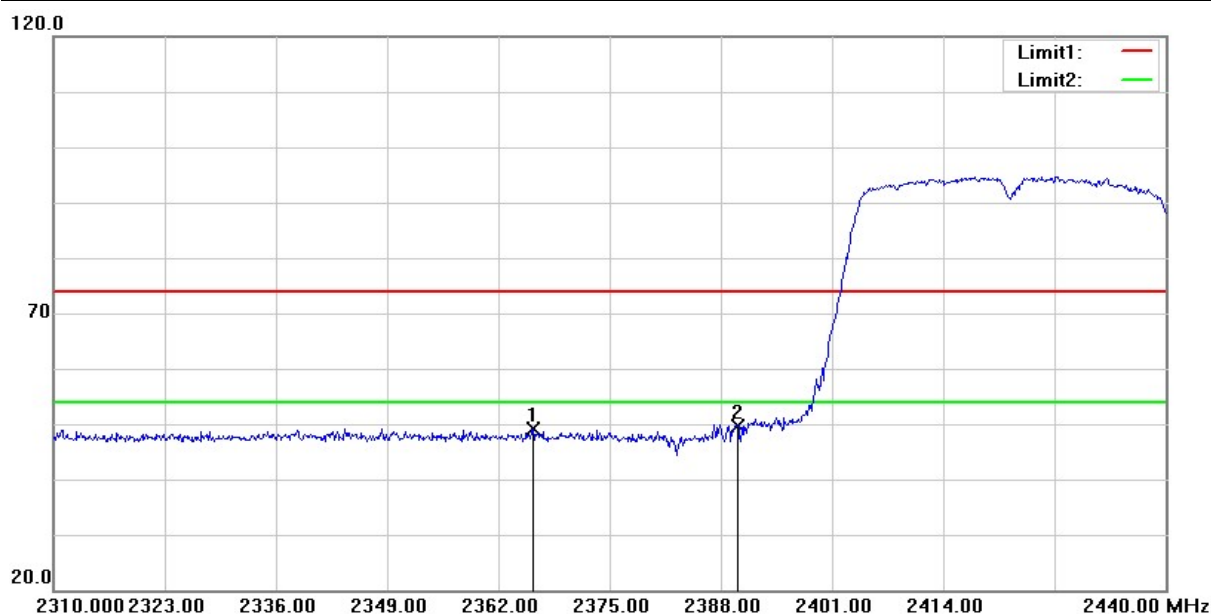


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.030	54.67	-5.48	49.19	74.00	-24.81	peak
2	2390.000	55.13	-5.55	49.58	74.00	-24.42	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/29
Test Channel :	CH09(2452MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

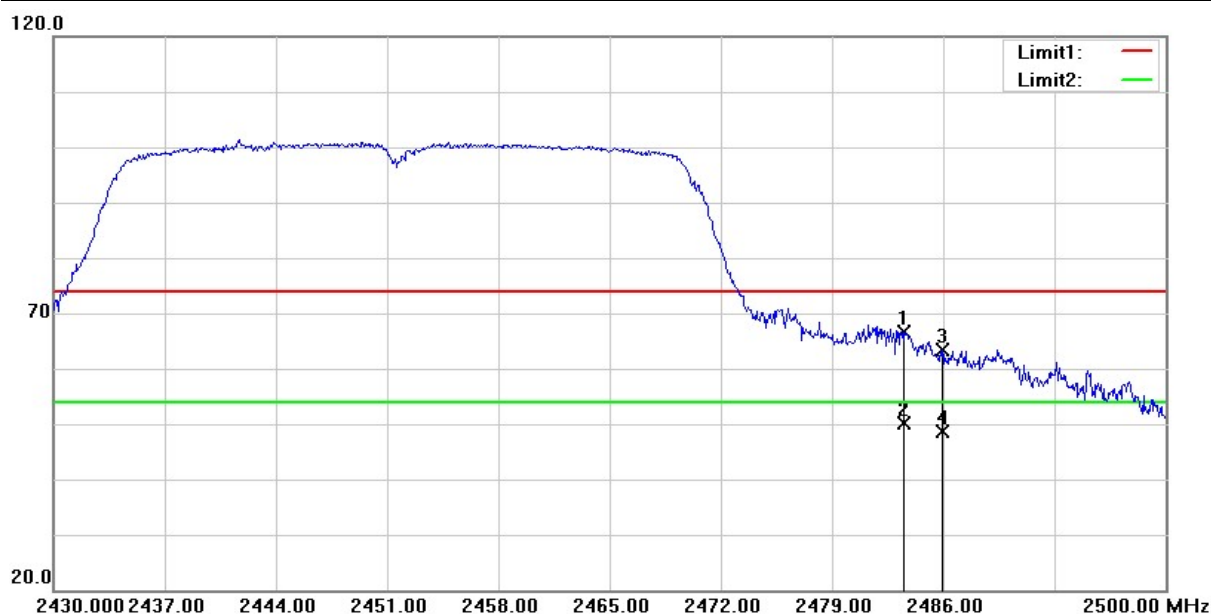


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	72.17	-5.66	66.51	74.00	-7.49	peak
2	2483.500	55.87	-5.66	50.21	54.00	-3.79	AVG
3	2485.930	69.06	-5.64	63.42	74.00	-10.58	peak
4	2485.930	54.31	-5.64	48.67	54.00	-5.33	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/29
Test Channel :	CH09(2452MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

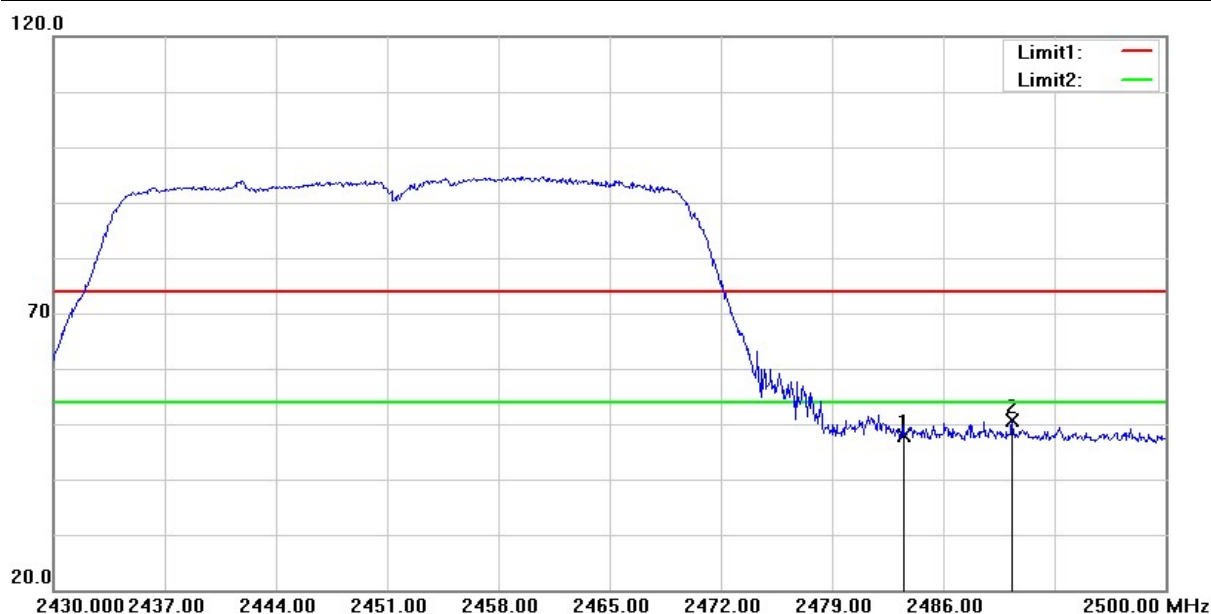

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.48	-5.66	47.82	74.00	-26.18	peak
2	2490.340	56.34	-5.64	50.70	74.00	-23.30	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency		
RF	802.11b / 802.11g / 802.11n HT20	802.11n HT40
Tx	CH01 (2412MHz)	CH03 (2422MHz)
	CH06 (2437MHz)	CH06 (2437MHz)
	CH11 (2462MHz)	CH09 (2452MHz)

Above 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	72.67	-19.26	53.41	74.00	-20.59	peak
2	4824.000	57.87	-19.26	38.61	54.00	-15.39	AVG
3	7236.000	56.87	-12.66	44.21	74.00	-29.79	peak
4	9648.000	55.97	-8.40	47.57	74.00	-26.43	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	68.27	-19.26	49.01	74.00	-24.99	peak
2	7236.000	57.09	-12.66	44.43	74.00	-29.57	peak
3	9648.000	55.57	-8.40	47.17	74.00	-26.83	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

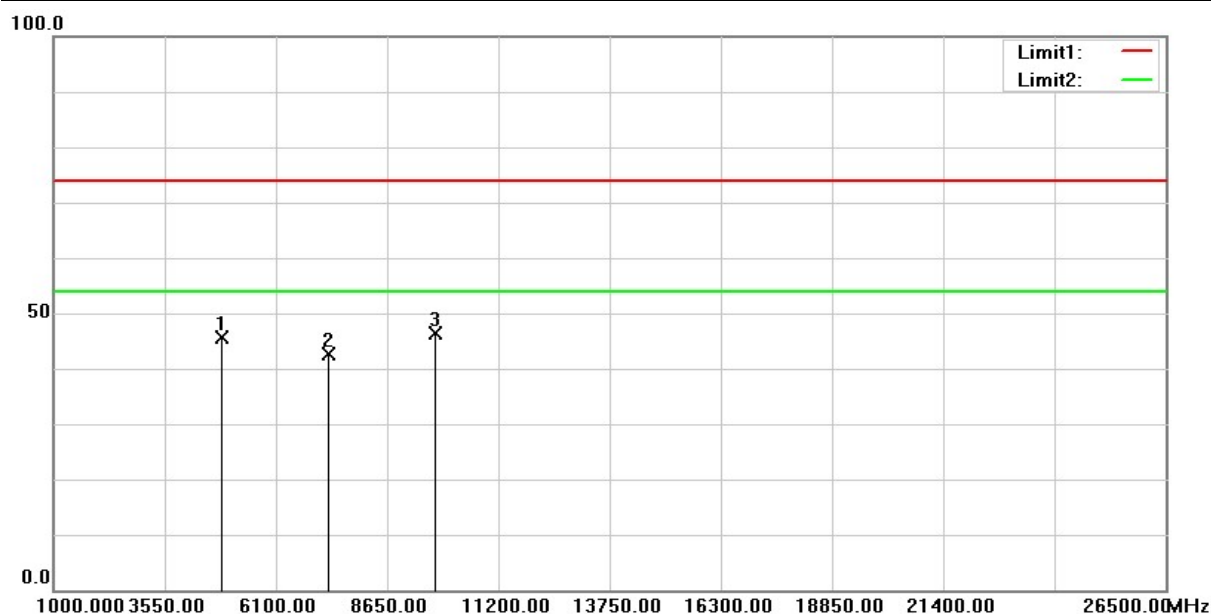


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	64.90	-19.23	45.67	74.00	-28.33	peak
2	7311.000	55.04	-12.51	42.53	74.00	-31.47	peak
3	9748.000	54.70	-8.30	46.40	74.00	-27.60	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

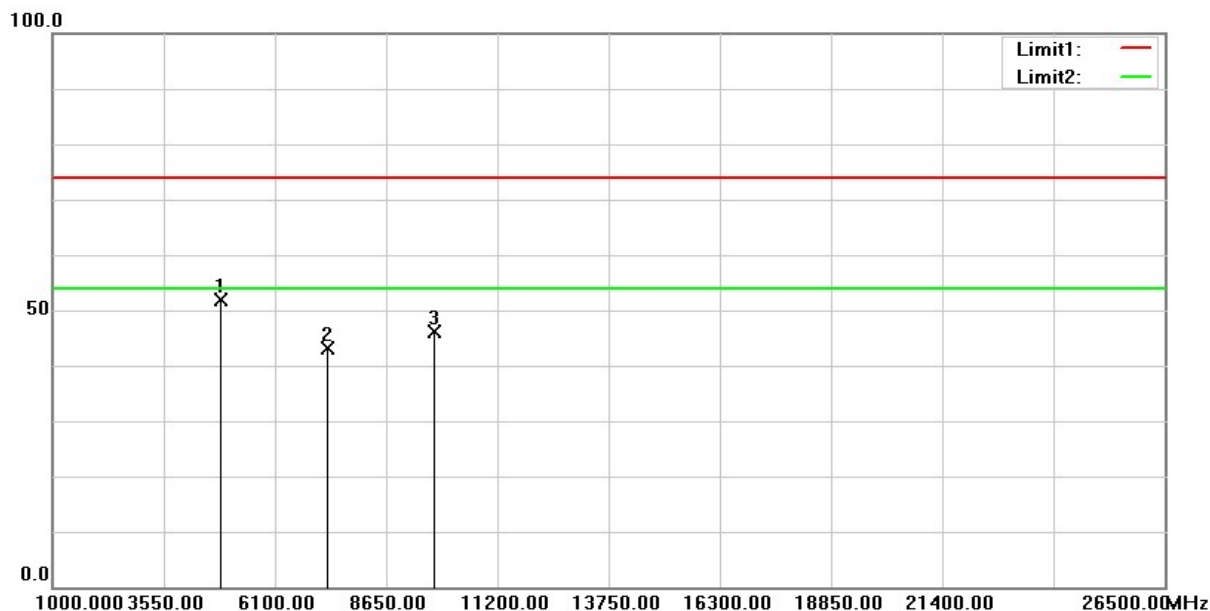


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	71.18	-19.23	51.95	74.00	-22.05	peak
2	7311.000	55.72	-12.51	43.21	74.00	-30.79	peak
3	9748.000	54.39	-8.30	46.09	74.00	-27.91	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

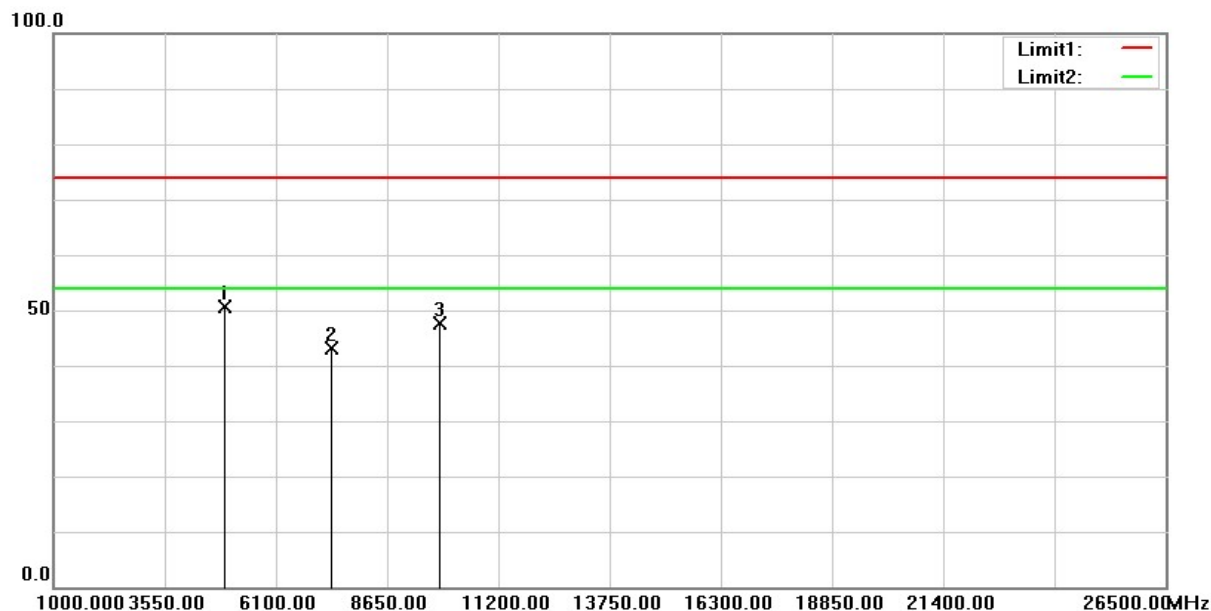


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	69.87	-19.14	50.73	74.00	-23.27	peak
2	7386.000	55.64	-12.47	43.17	74.00	-30.83	peak
3	9848.000	55.65	-7.99	47.66	74.00	-26.34	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

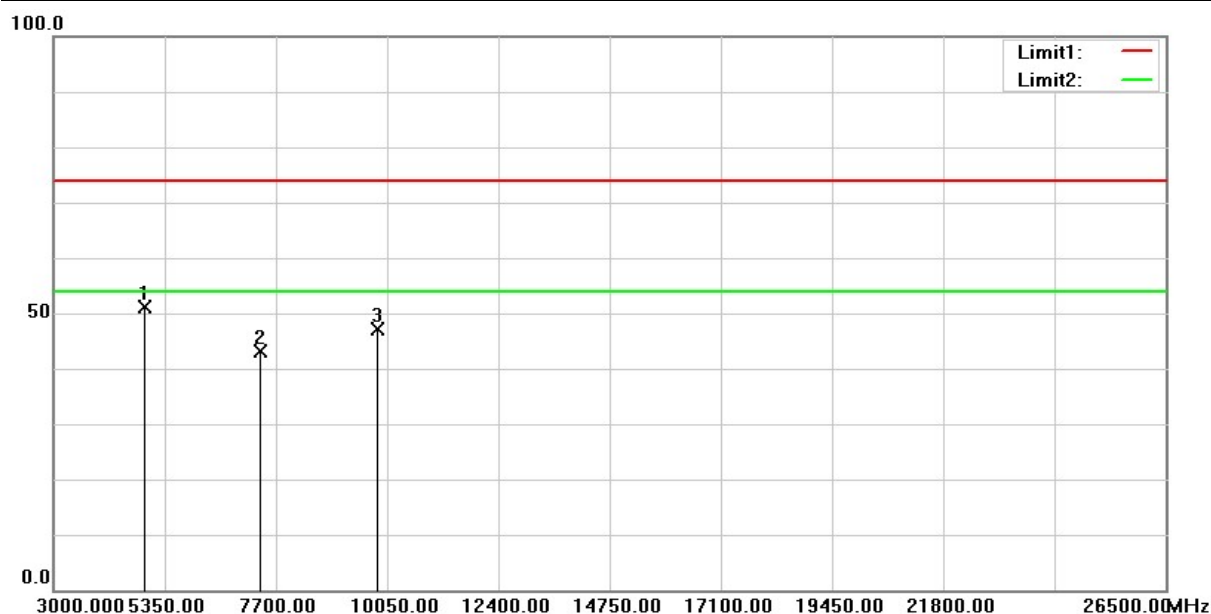


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	70.22	-19.14	51.08	74.00	-22.92	peak
2	7386.000	55.72	-12.47	43.25	74.00	-30.75	peak
3	9848.000	55.15	-7.99	47.16	74.00	-26.84	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

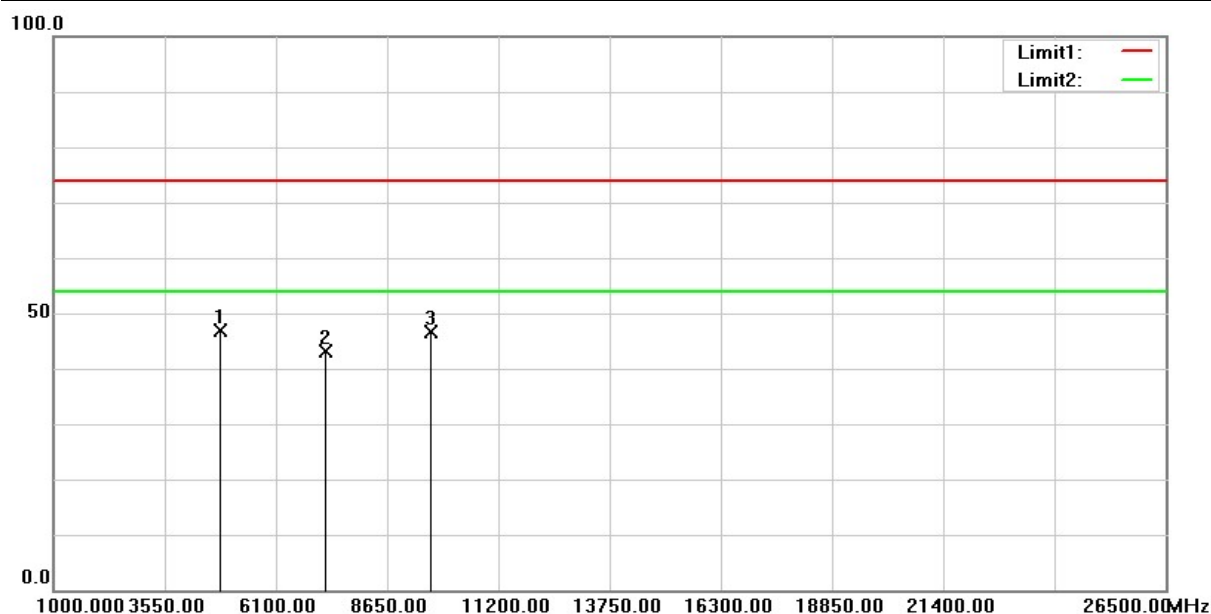


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	66.12	-19.26	46.86	74.00	-27.14	peak
2	7236.000	55.83	-12.66	43.17	74.00	-30.83	peak
3	9648.000	55.03	-8.40	46.63	74.00	-27.37	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

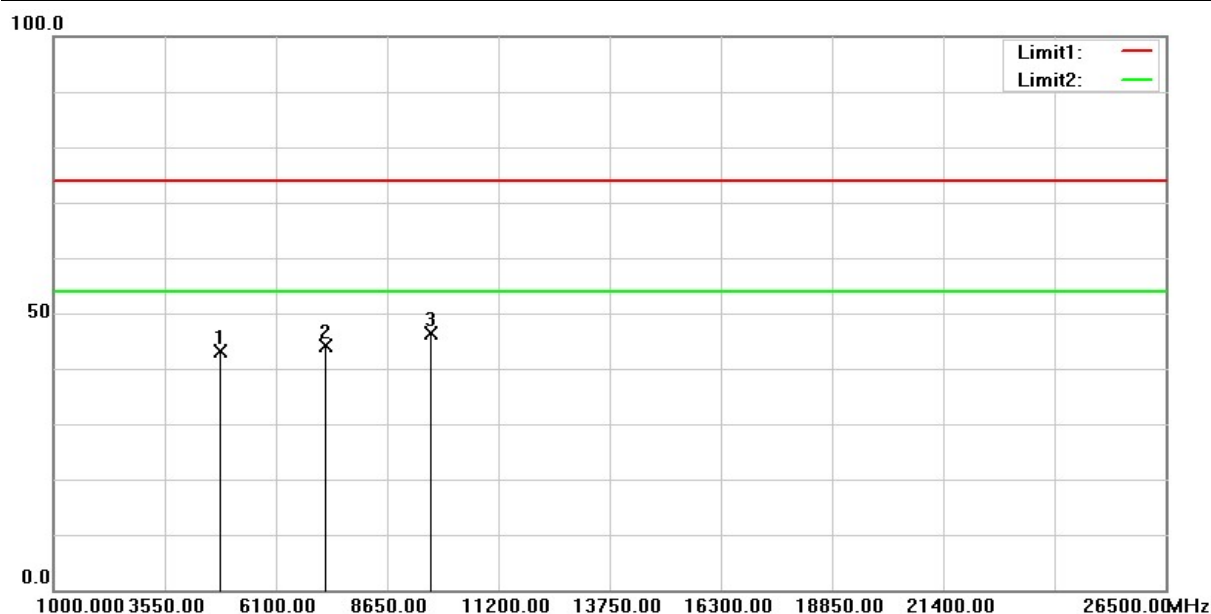


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	62.49	-19.26	43.23	74.00	-30.77	peak
2	7236.000	56.90	-12.66	44.24	74.00	-29.76	peak
3	9648.000	54.86	-8.40	46.46	74.00	-27.54	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

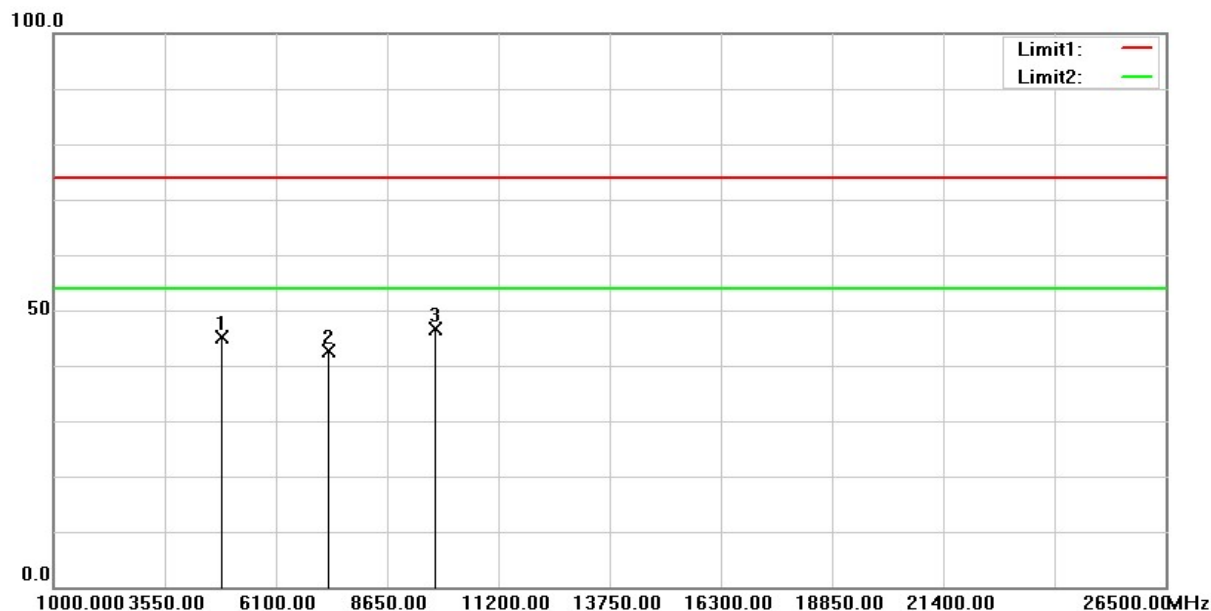


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	64.43	-19.23	45.20	74.00	-28.80	peak
2	7311.000	55.16	-12.51	42.65	74.00	-31.35	peak
3	9748.000	55.01	-8.30	46.71	74.00	-27.29	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

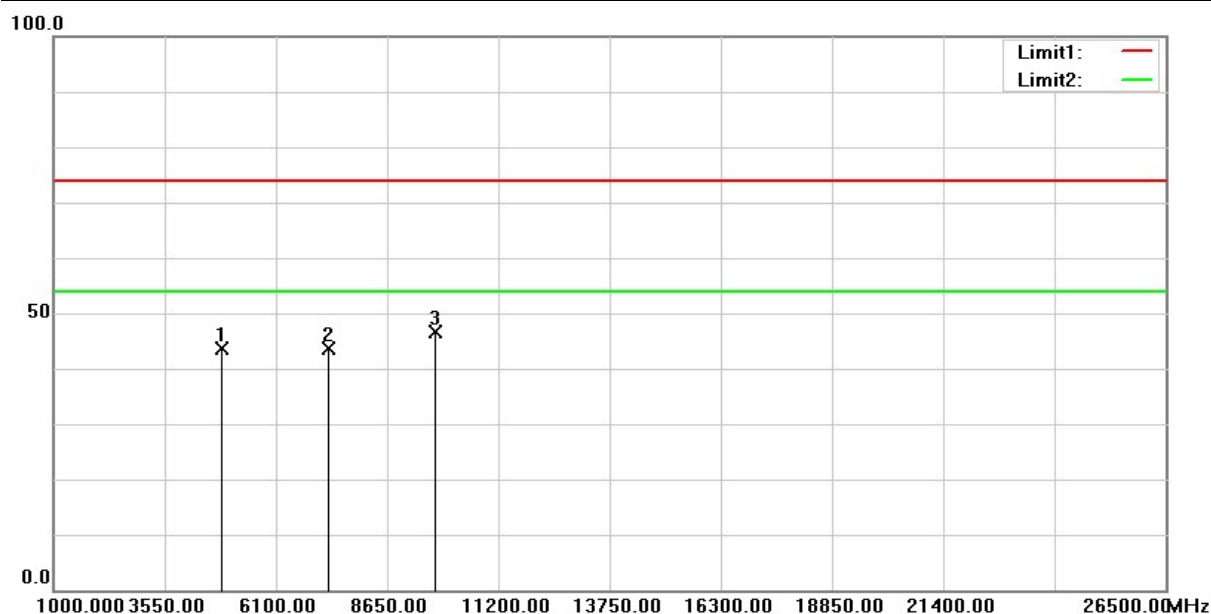


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.87	-19.23	43.64	74.00	-30.36	peak
2	7311.000	56.24	-12.51	43.73	74.00	-30.27	peak
3	9748.000	54.92	-8.30	46.62	74.00	-27.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

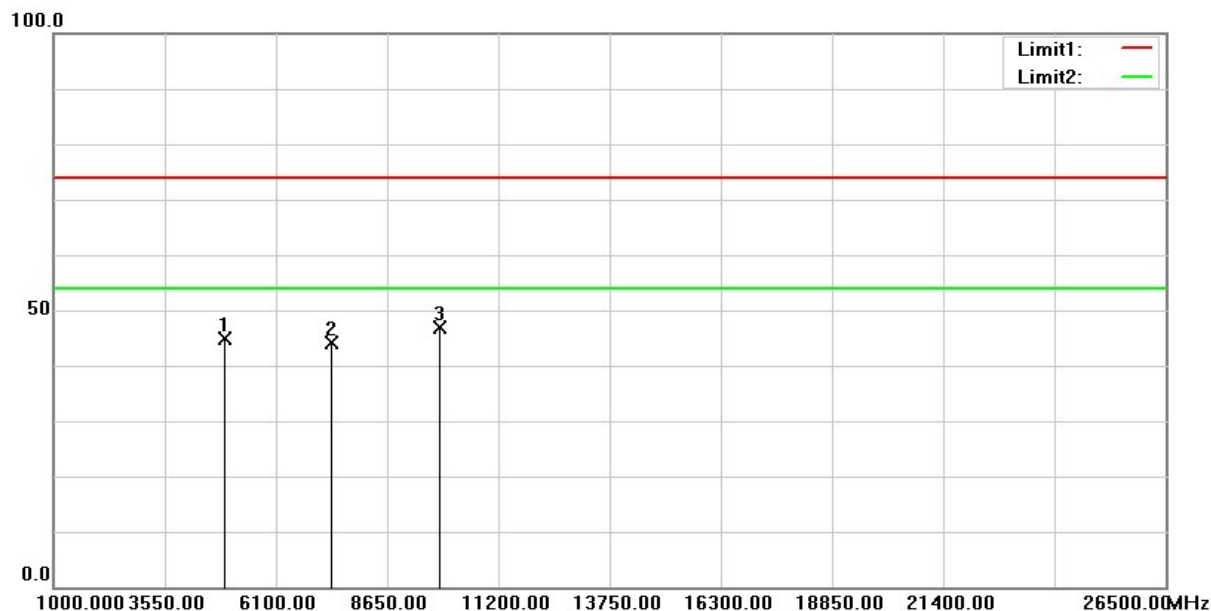

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	64.03	-19.14	44.89	74.00	-29.11	peak
2	7386.000	56.71	-12.47	44.24	74.00	-29.76	peak
3	9848.000	54.79	-7.99	46.80	74.00	-27.20	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	58.41	-19.14	39.27	74.00	-34.73	peak
2	7386.000	55.04	-12.47	42.57	74.00	-31.43	peak
3	9848.000	54.82	-7.99	46.83	74.00	-27.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

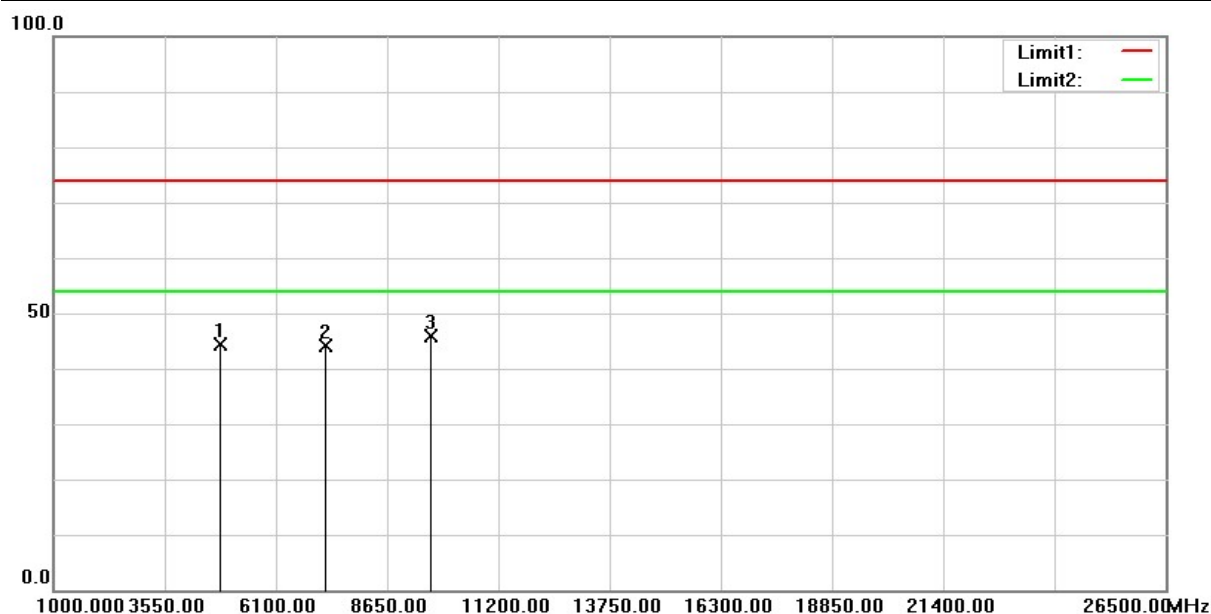

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	63.68	-19.26	44.42	74.00	-29.58	peak
2	7236.000	56.75	-12.66	44.09	74.00	-29.91	peak
3	9648.000	54.38	-8.40	45.98	74.00	-28.02	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH01(2412MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.82	-19.26	42.56	74.00	-31.44	peak
2	7236.000	55.78	-12.66	43.12	74.00	-30.88	peak
3	9648.000	55.38	-8.40	46.98	74.00	-27.02	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

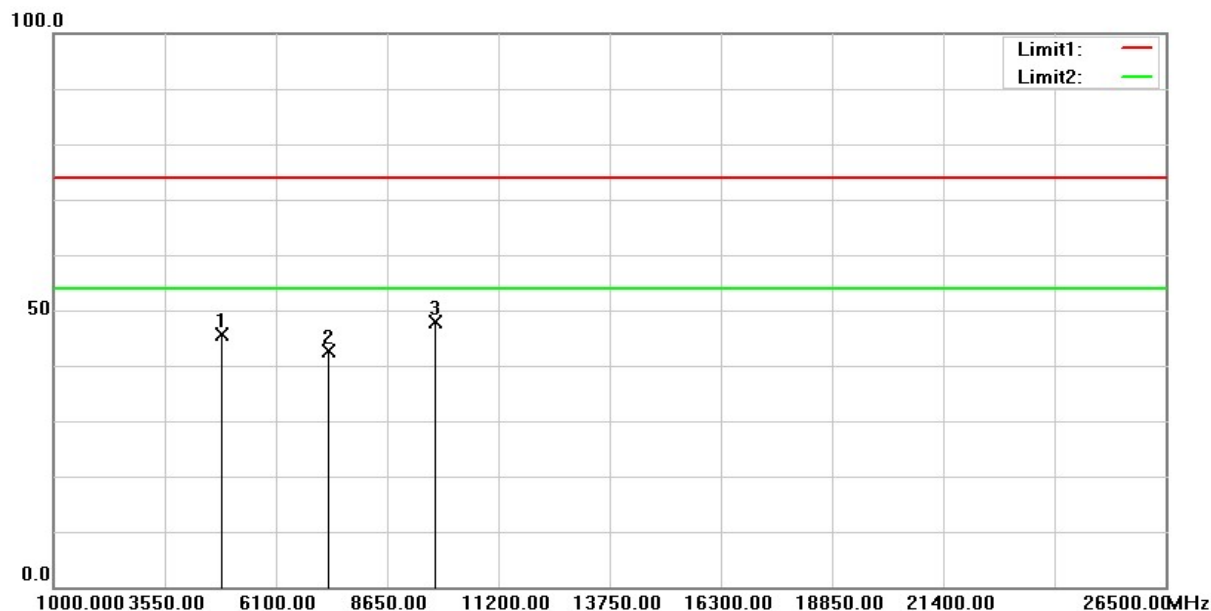


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	64.84	-19.23	45.61	74.00	-28.39	peak
2	7311.000	55.10	-12.51	42.59	74.00	-31.41	peak
3	9748.000	56.30	-8.30	48.00	74.00	-26.00	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

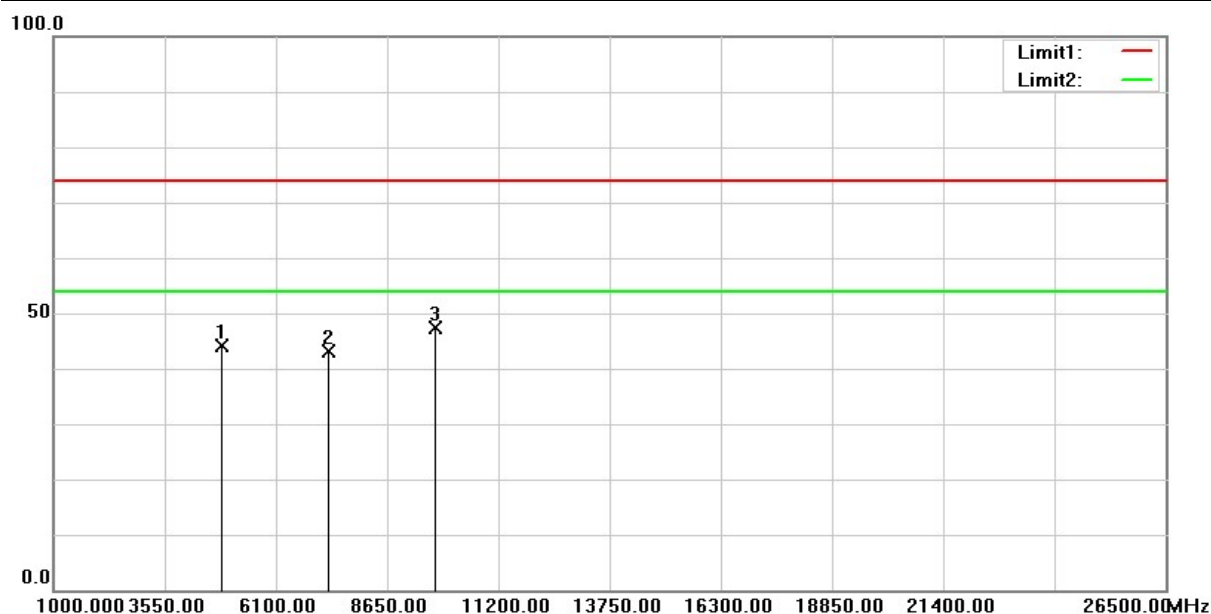


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	63.29	-19.23	44.06	74.00	-29.94	peak
2	7311.000	55.58	-12.51	43.07	74.00	-30.93	peak
3	9748.000	55.64	-8.30	47.34	74.00	-26.66	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

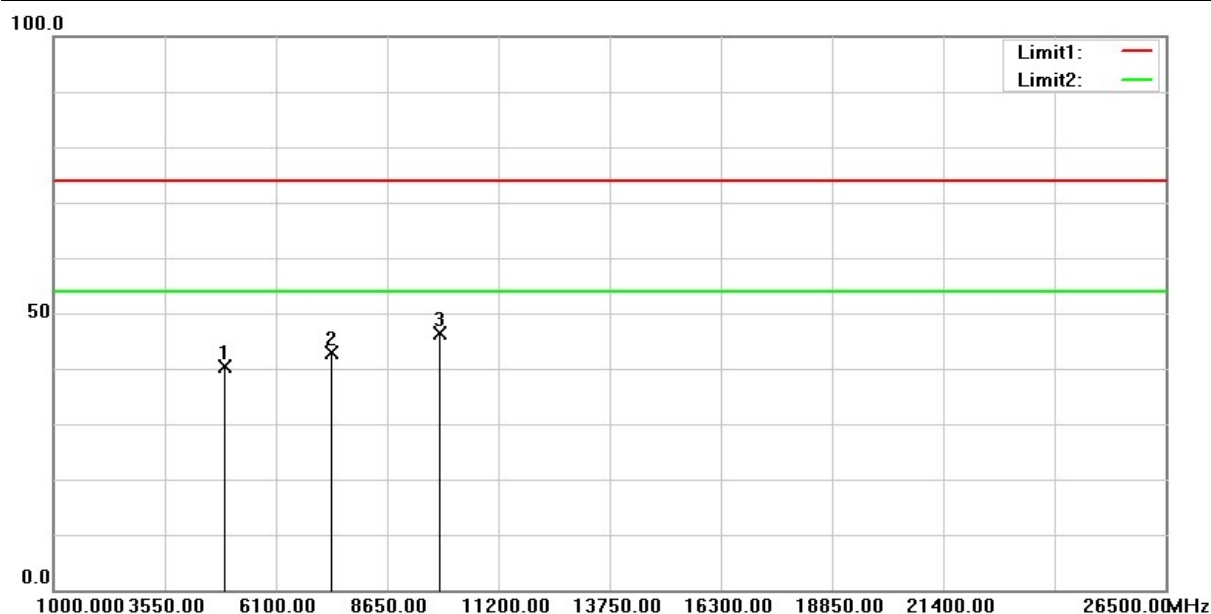

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	59.41	-19.14	40.27	74.00	-33.73	peak
2	7386.000	55.36	-12.47	42.89	74.00	-31.11	peak
3	9848.000	54.34	-7.99	46.35	74.00	-27.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2020/10/30
Test Channel :	CH11(2462MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	58.06	-19.14	38.92	74.00	-35.08	peak
2	7386.000	55.32	-12.47	42.85	74.00	-31.15	peak
3	9848.000	55.71	-7.99	47.72	74.00	-26.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH03(2422MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

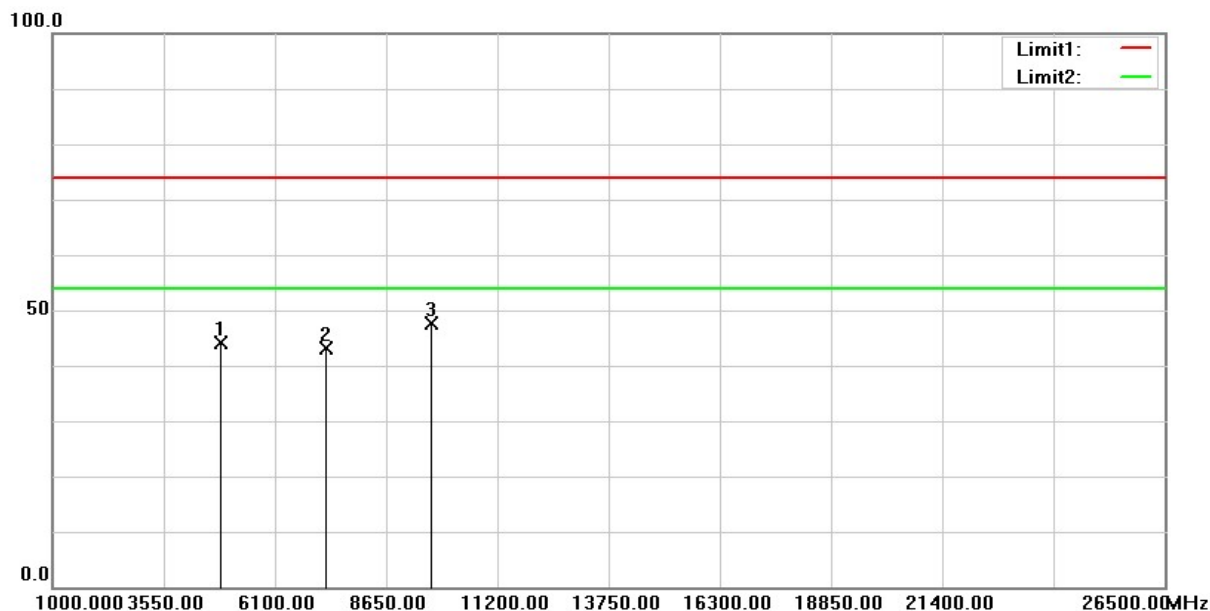

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	63.35	-19.22	44.13	74.00	-29.87	peak
2	7266.000	55.79	-12.54	43.25	74.00	-30.75	peak
3	9688.000	55.95	-8.43	47.52	74.00	-26.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH03(2422MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	62.10	-19.22	42.88	74.00	-31.12	peak
2	7266.000	56.55	-12.54	44.01	74.00	-29.99	peak
3	9688.000	55.38	-8.43	46.95	74.00	-27.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

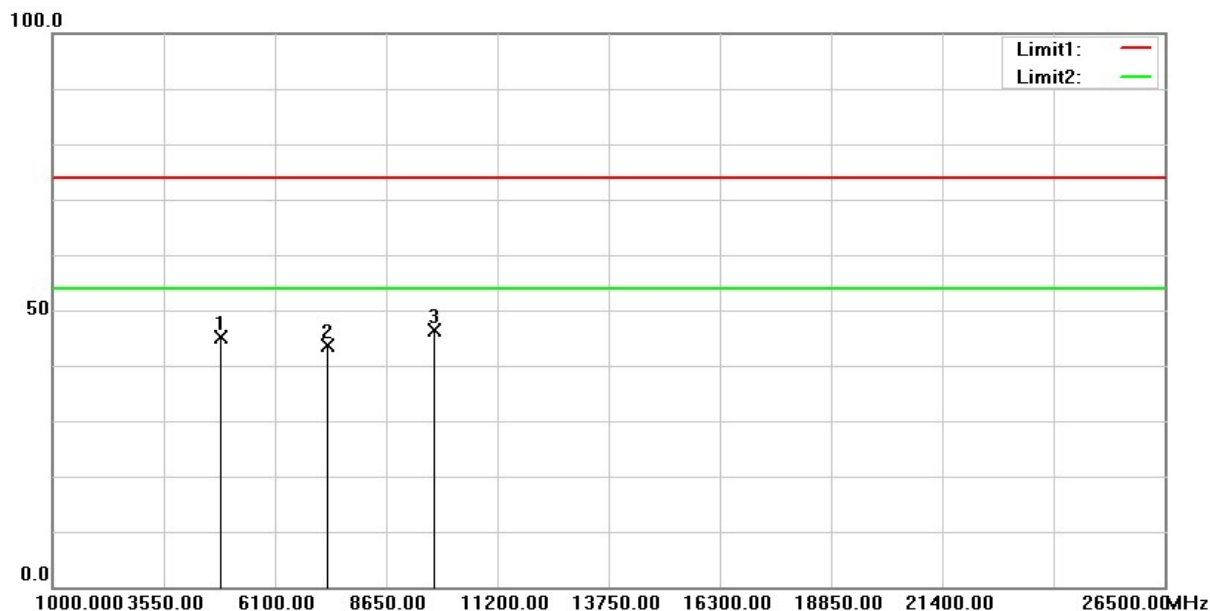


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	64.42	-19.23	45.19	74.00	-28.81	peak
2	7311.000	56.14	-12.51	43.63	74.00	-30.37	peak
3	9748.000	54.60	-8.30	46.30	74.00	-27.70	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

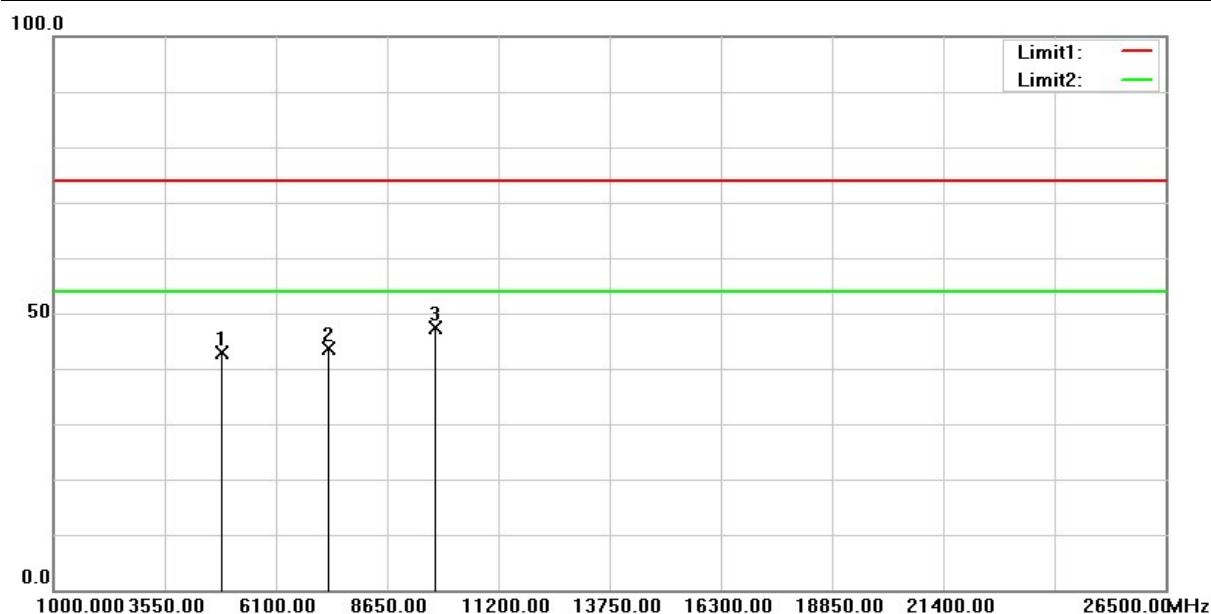


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.22	-19.23	42.99	74.00	-31.01	peak
2	7311.000	56.19	-12.51	43.68	74.00	-30.32	peak
3	9748.000	55.63	-8.30	47.33	74.00	-26.67	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH09(2452MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

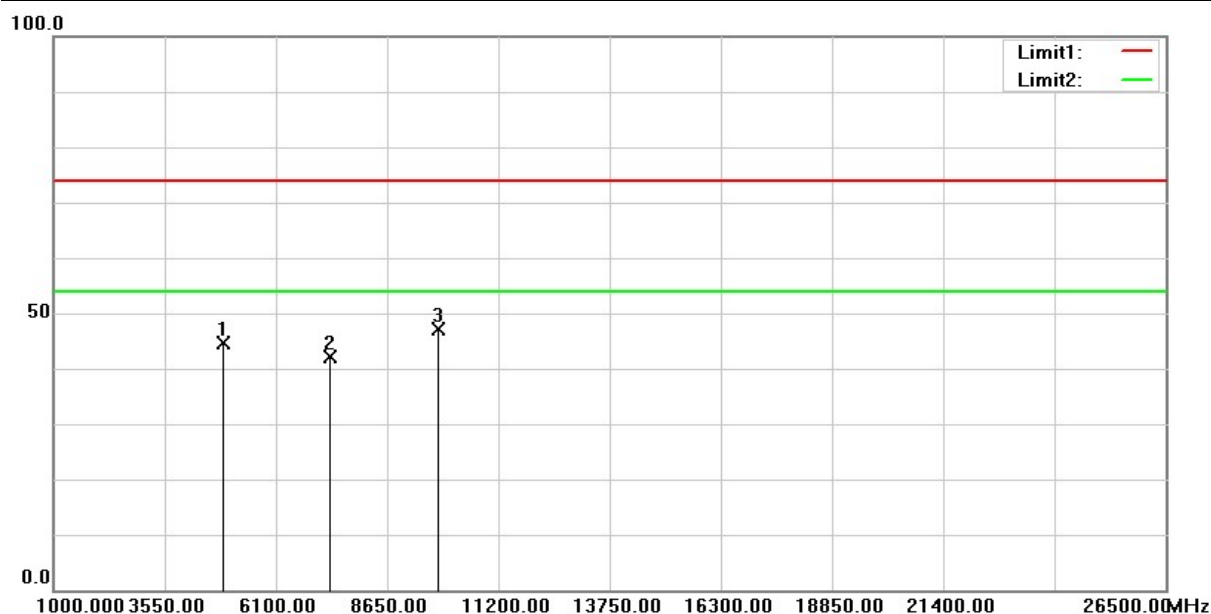


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	63.73	-19.21	44.52	74.00	-29.48	peak
2	7356.000	54.64	-12.49	42.15	74.00	-31.85	peak
3	9808.000	55.18	-8.11	47.07	74.00	-26.93	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2020/10/30
Test Channel :	CH09(2452MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

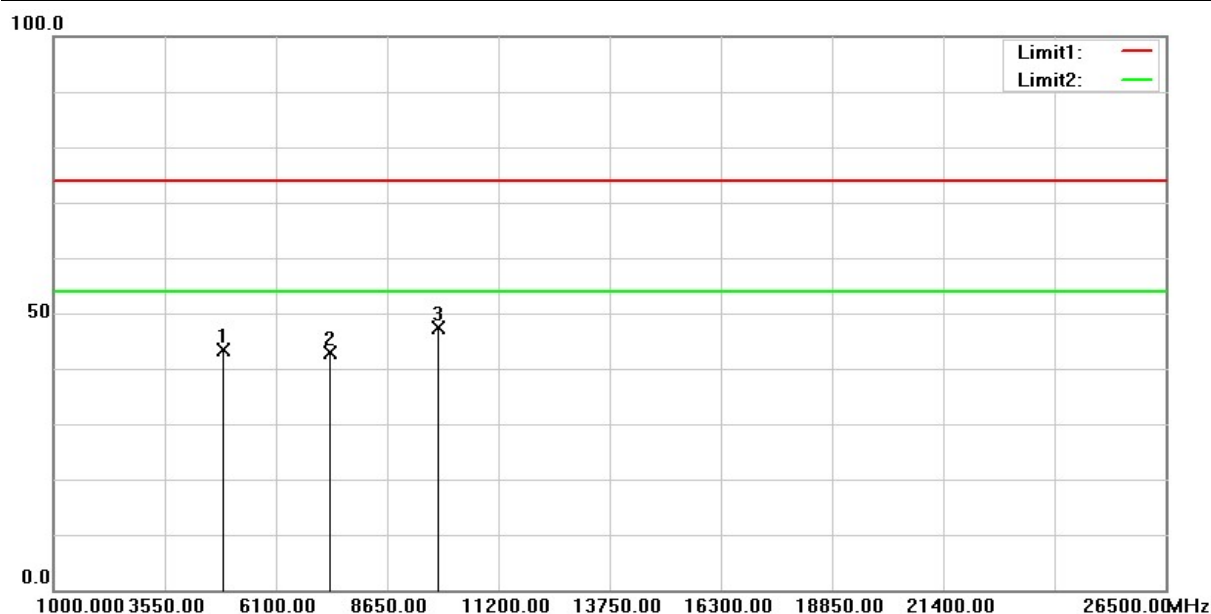


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	62.52	-19.21	43.31	74.00	-30.69	peak
2	7356.000	55.25	-12.49	42.76	74.00	-31.24	peak
3	9808.000	55.50	-8.11	47.39	74.00	-26.61	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

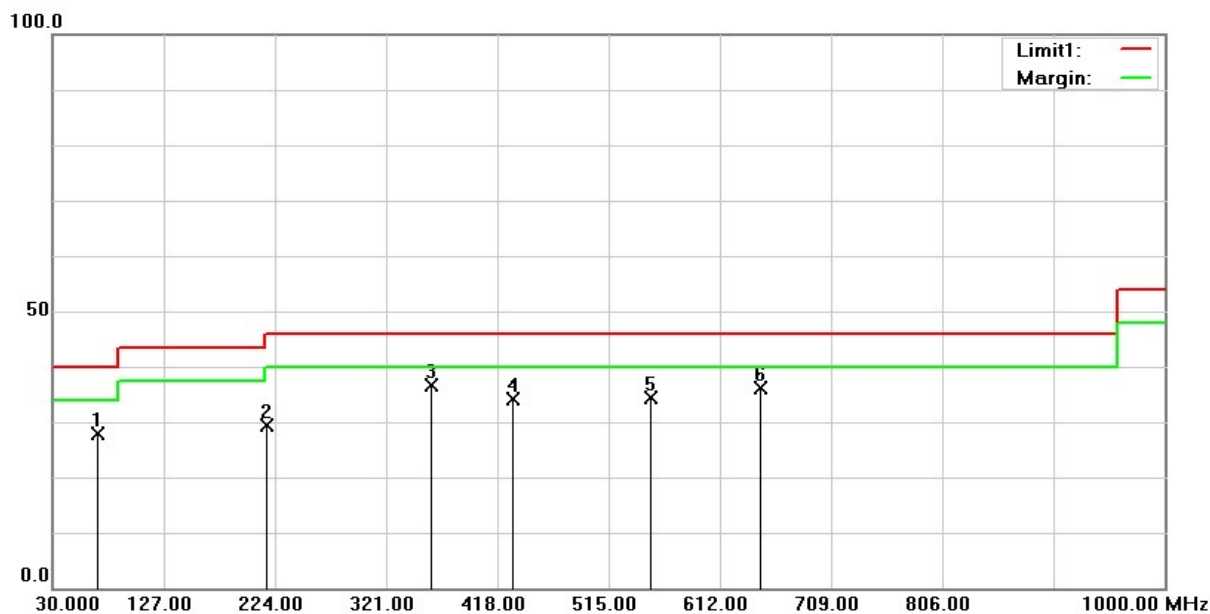

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	68.8000	39.62	-11.76	27.86	40.00	-12.14	QP
2	216.2400	39.77	-10.39	29.38	46.00	-16.62	QP
3	359.8000	43.59	-6.94	36.65	46.00	-9.35	QP
4	431.5800	39.35	-5.10	34.25	46.00	-11.75	QP
5	551.8600	37.36	-2.86	34.50	46.00	-11.50	QP
6	647.8900	37.21	-1.12	36.09	46.00	-9.91	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2020/10/30
Test Channel :	CH06(2437MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	106.6300	48.55	-13.11	35.44	43.50	-8.06	QP
2	323.9100	45.22	-7.67	37.55	46.00	-8.45	QP
3	431.5800	40.71	-5.10	35.61	46.00	-10.39	QP
4	551.8600	39.50	-2.86	36.64	46.00	-9.36	QP
5	576.1100	39.58	-2.32	37.26	46.00	-8.74	QP
6	647.8900	36.77	-1.12	35.65	46.00	-10.35	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.7 AC Conducted Emissions Measurement

2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.7.2 Test Setup

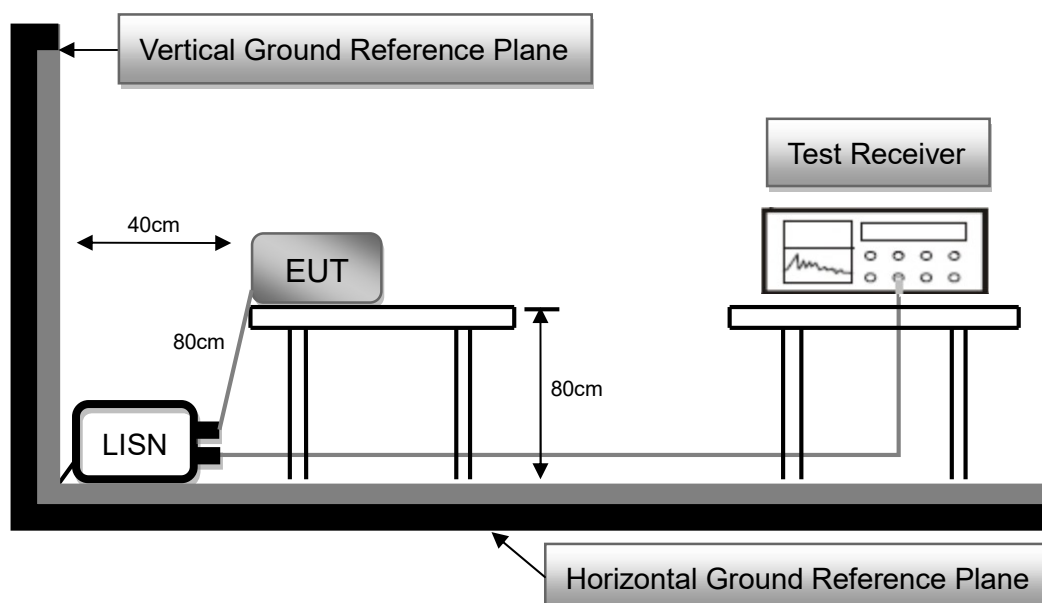


2.7.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2020/11/03	Phase :	L
Temperature :	25°C	Humidity :	65 %

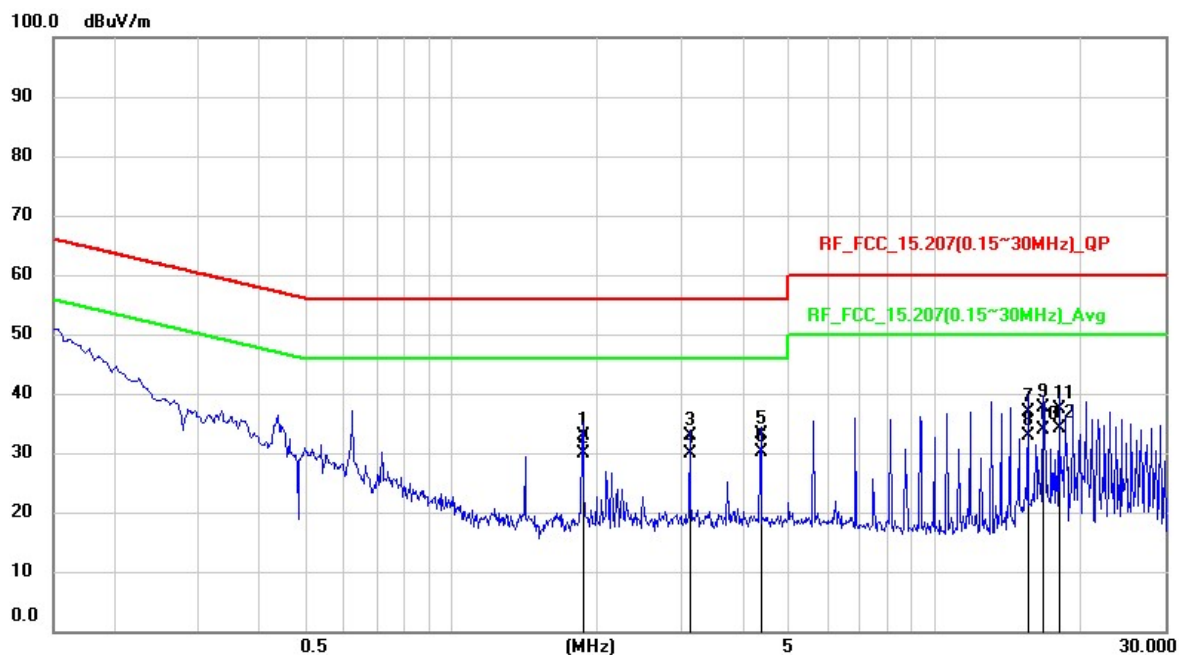


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.8703	22.96	10	32.96	56	-23.04	QP
2	1.8703	19.78	10	29.78	46	-16.22	AVG
3	3.1165	22.9	10.03	32.93	56	-23.07	QP
4	3.1165	19.84	10.03	29.87	46	-16.13	AVG
5	4.3642	23.02	10.07	33.09	56	-22.91	QP
6	4.3642	20.05	10.07	30.12	46	-15.88	AVG
7	15.5871	26.58	10.33	36.91	60	-23.09	QP
8	15.5871	22.64	10.33	32.97	50	-17.03	AVG
9	16.8339	27.15	10.36	37.51	60	-22.49	QP
10	16.8339	23.43	10.36	33.79	50	-16.21	AVG
11	18.08	26.98	10.38	37.36	60	-22.64	QP
12	18.08	23.63	10.38	34.01	50	-15.99	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2020/11/03	Phase :	N
Temperature :	25°C	Humidity :	65 %

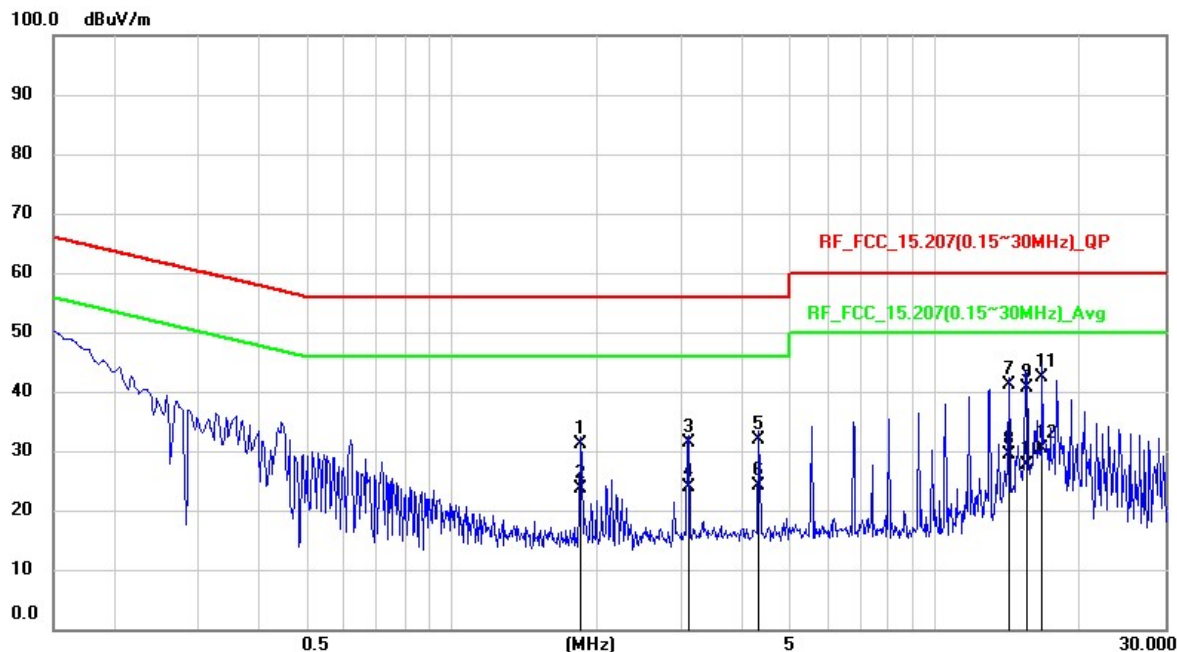

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.8586	21.03	10.03	31.06	56	-24.94	QP
2	1.8586	13.58	10.03	23.61	46	-22.39	AVG
3	3.0983	21.35	10.06	31.41	56	-24.59	QP
4	3.0983	13.73	10.06	23.79	46	-22.21	AVG
5	4.3373	21.81	10.09	31.9	56	-24.1	QP
6	4.3373	14.02	10.09	24.11	46	-21.89	AVG
7	14.256	30.71	10.3	41.01	60	-18.99	QP
8	14.256	19.11	10.3	29.41	50	-20.59	AVG
9	15.4964	30.38	10.32	40.7	60	-19.3	QP
10	15.4964	17.23	10.32	27.55	50	-22.45	AVG
11	16.7427	32.03	10.35	42.38	60	-17.62	QP
12	16.7427	19.91	10.35	30.26	50	-19.74	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---