

TEST REPORT

Product : Portable Electronic Piano
Trade mark : N/A
Model/Type reference : PH88C, PH61C, PH88, PH61,
PH88Y, PH61Y, PH88X, PH61X,
PJ88, PZ88, PZ61, PZ61M, PZ49
Serial Number : N/A
Report Number : EED32M00296701
FCC ID : 2AX4N-KHXPIANO6188
Date of Issue: : Nov. 23, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shenzhen Konix Technology Co., Ltd.
Building 2, YuFeng Industrial Area, Shangfen Community,
Minzhi Street, Longhua , Shenzhen

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Tom chen

Tom chen

Approved by:

Aaron Ma

Aaron Ma

Date:

Nov. 23, 2020



Check No.:4762153050

2 Version

Version No.	Date	Description
00	Nov. 23, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: PH88C, PH61C, PH88, PH61, PH88Y, PH61Y, PH88X, PH61X, PJ88, PZ88, PZ61, PZ61M, PZ49

Only the model PH88C was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance, pack and model name.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, $K=2$)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth	14
Appendix B): Carrier Frequency Separation	18
Appendix C): Dwell Time	22
Appendix D): Hopping Channel Number	27
Appendix E): Conducted Peak Output Power	29
Appendix F): Band-edge for RF Conducted Emissions	33
Appendix G): RF Conducted Spurious Emissions	37
Appendix H) Pseudorandom Frequency Hopping Sequence	44
Appendix I) Antenna Requirement	45
Appendix J) AC Power Line Conducted Emission	46
Appendix K) Restricted bands around fundamental frequency (Radiated)	49
Appendix L) Radiated Spurious Emissions	66
PHOTOGRAPHS OF TEST SETUP	72
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	75

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

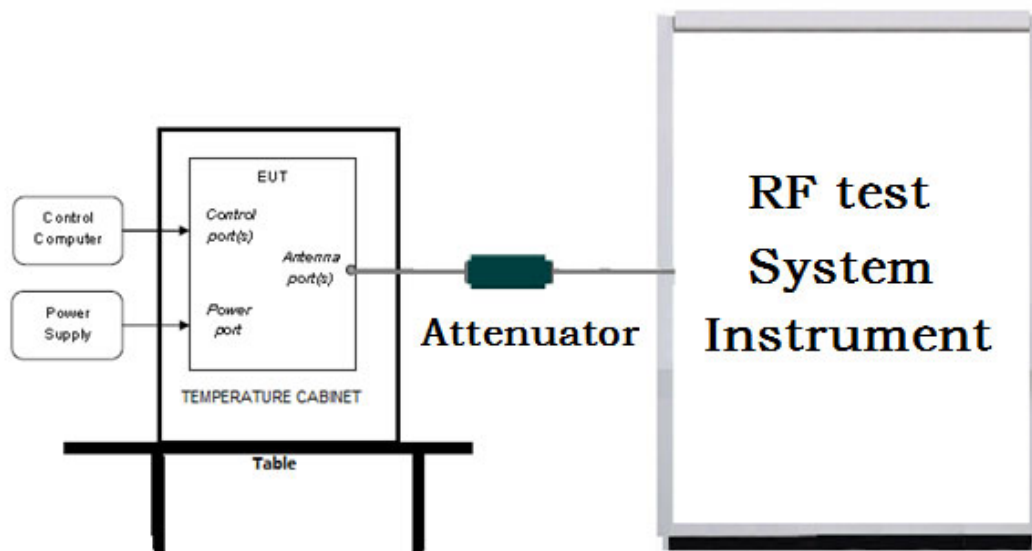

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

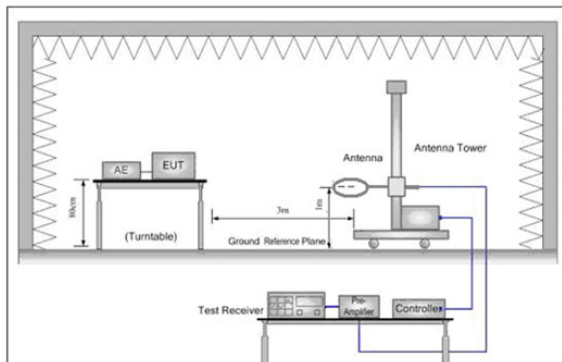


Figure 1. Below 30MHz

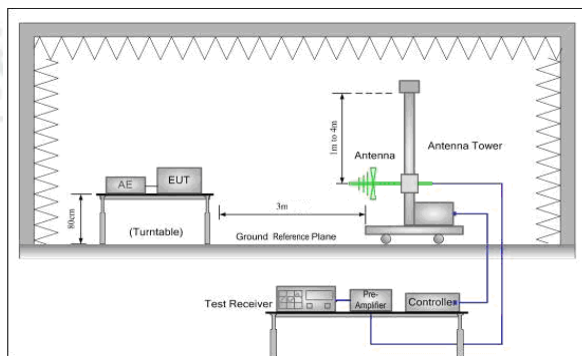


Figure 2. 30MHz to 1GHz


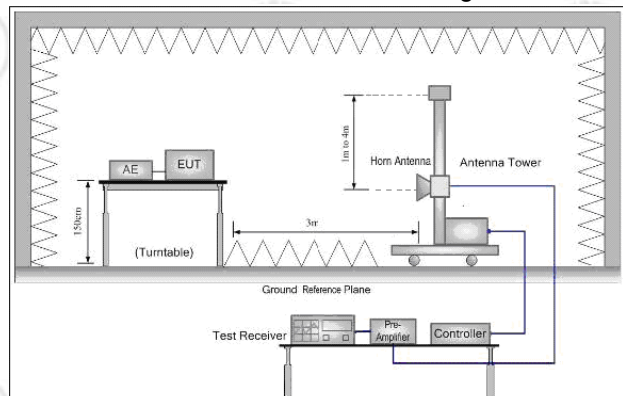


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

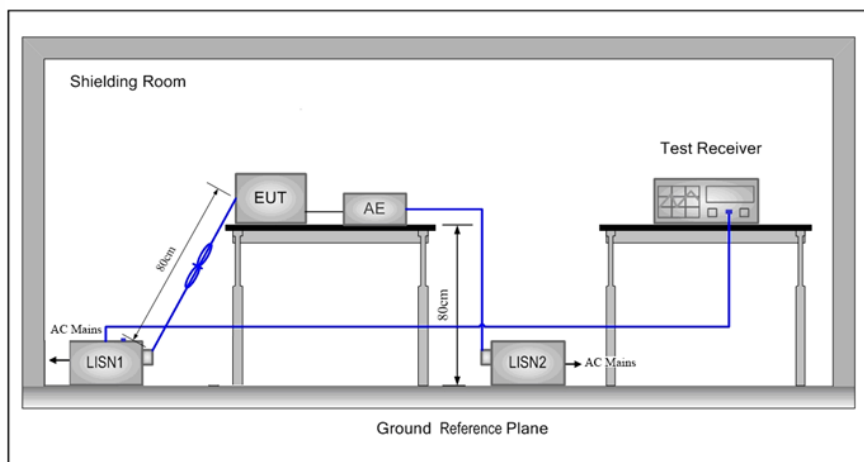

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel 78
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	Shenzhen Konix Technology Co., Ltd.
Address of Applicant:	Building 2, YuFeng Industrial Area, Shangfen Community, Minzhi Street, Longhua, Shenzhen
Manufacturer:	Shenzhen Konix Technology Co., Ltd.
Address of Manufacturer:	Building 2, YuFeng Industrial Area, Shangfen Community, Minzhi Street, Longhua, Shenzhen
Factory:	Guangdong Konix Technology Co., Ltd.
Address of Factory:	Room 401, Building 3, No. 76 Qingxi Baijia Road, Qingxi Town, Dongguan, Guangdong

6.2 General Description of EUT

Product Name:	Portable Electronic Piano	
Model No.(EUT):	PH88C, PH61C, PH88, PH61, PH88Y, PH61Y, PH88X, PH61X, PJ88, PZ88, PZ61, PZ61M, PZ49	
Test Mode No.:	PH88C	
Tark mark:	N/A	
EUT Supports Radios application:	2402MHz to 2480MHz	
Power Supply:	AC/DC ADAPTER	MODEL: RH-050100US INPUT: 100-240V~50/60Hz 0.4A OUTPUT: 5V---1A
	Lithium Polymer Battery	Model: HLY18650 3.7V 2200mAh 8.14Wh
Sample Received Date:	Sep. 18, 2020	
Sample tested Date:	Sep. 18, 2020 to Oct. 21, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	Default
Test Software of EUT:	FCC Assist
Antenna Type:	PCB antenna
Antenna Gain:	-0.58dBi
Test Voltage:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18NM 12-0398-002	---	---	---
High-pass filter	MICRO- TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980597	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-16-2020	10-15-2021
Multi device Controller	maturo	NCD/070/10711 112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudo random Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth

Test Limit

According to §15.247(a) (1)

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.


Test Setup







Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9529	0.85338	PASS
GFSK	MCH	0.9499	0.85517	PASS
GFSK	HCH	0.9533	0.85559	PASS
π /4DQPSK	LCH	1.311	1.1858	PASS
π /4DQPSK	MCH	1.317	1.1888	PASS
π /4DQPSK	HCH	1.312	1.1882	PASS

Test Graph

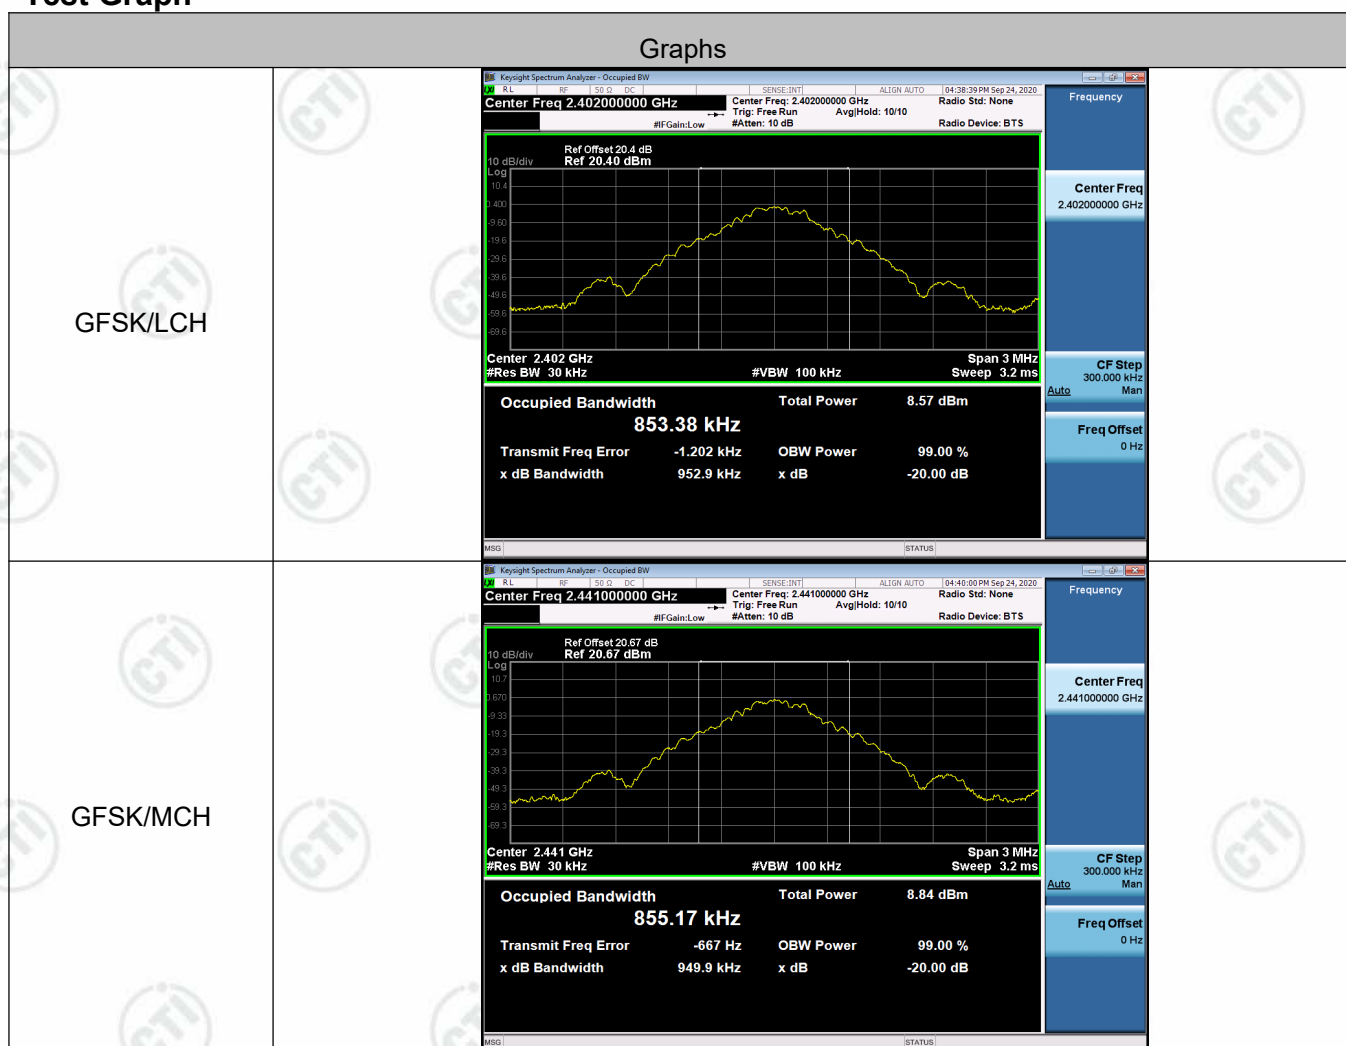

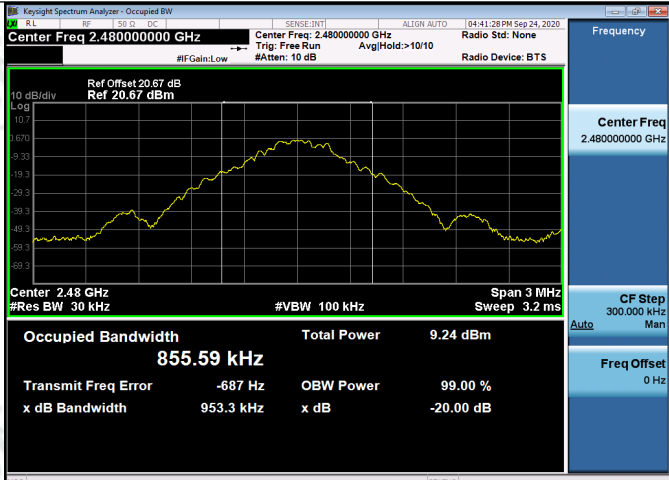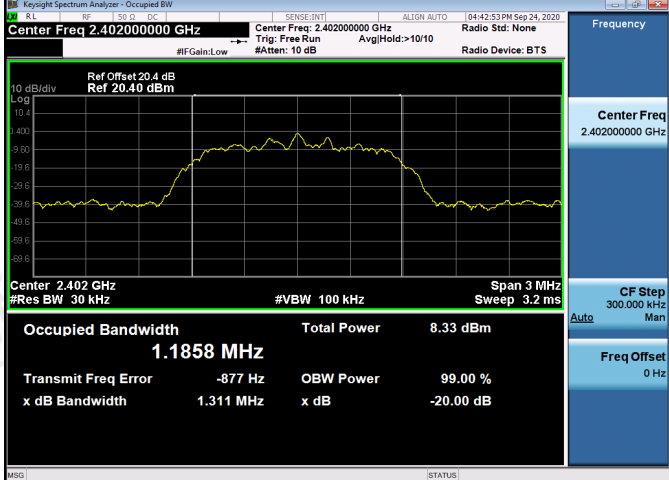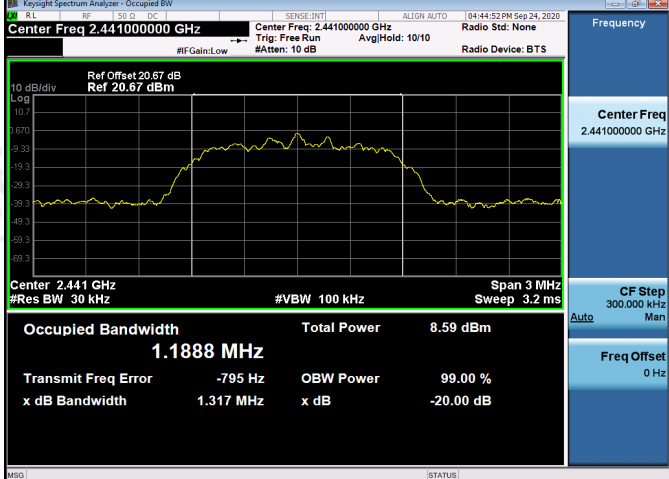GFSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 20.67 dB Ref: 20.67 dBm Occupied Bandwidth: 855.59 kHz Total Power: 9.24 dBm Transmit Freq Error: -687 Hz OBW Power: 99.00 % x dB Bandwidth: 953.3 kHz x dB: -20.00 dB
π/4DQPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 20.4 dB Ref: 20.40 dBm Occupied Bandwidth: 1.1858 MHz Total Power: 8.33 dBm Transmit Freq Error: -877 Hz OBW Power: 99.00 % x dB Bandwidth: 1.311 MHz x dB: -20.00 dB
π/4DQPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 20.67 dB Ref: 20.67 dBm Occupied Bandwidth: 1.1888 MHz Total Power: 8.59 dBm Transmit Freq Error: -795 Hz OBW Power: 99.00 % x dB Bandwidth: 1.317 MHz x dB: -20.00 dB

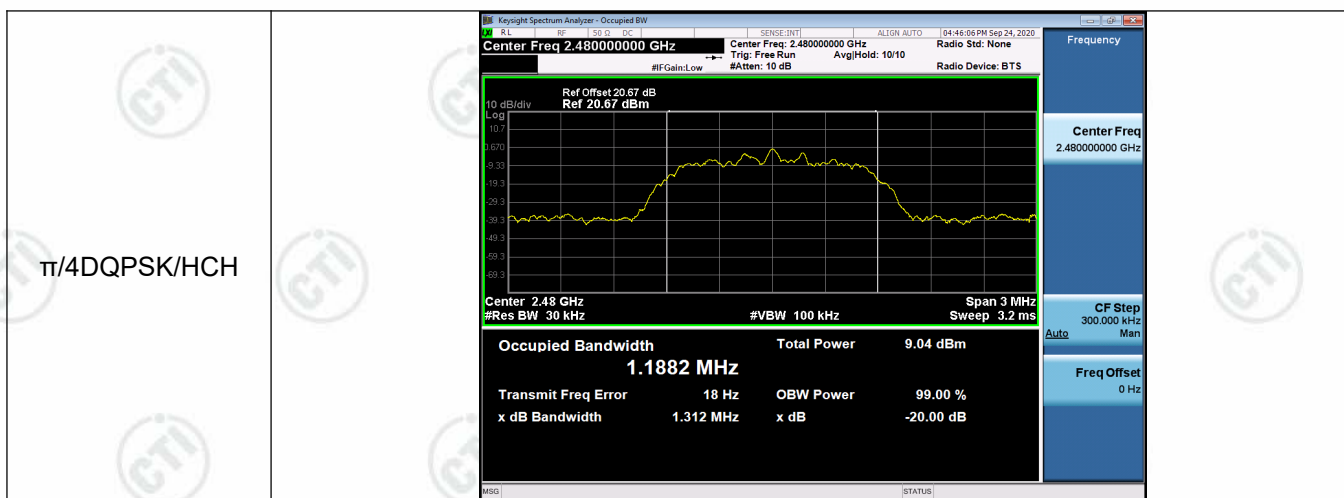

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1)


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency


Test Setup






Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.090	PASS
GFSK	MCH	0.932	PASS
GFSK	HCH	1.034	PASS
$\pi/4$ DQPSK	LCH	0.994	PASS
$\pi/4$ DQPSK	MCH	1.006	PASS
$\pi/4$ DQPSK	HCH	1.010	PASS

Test Graph

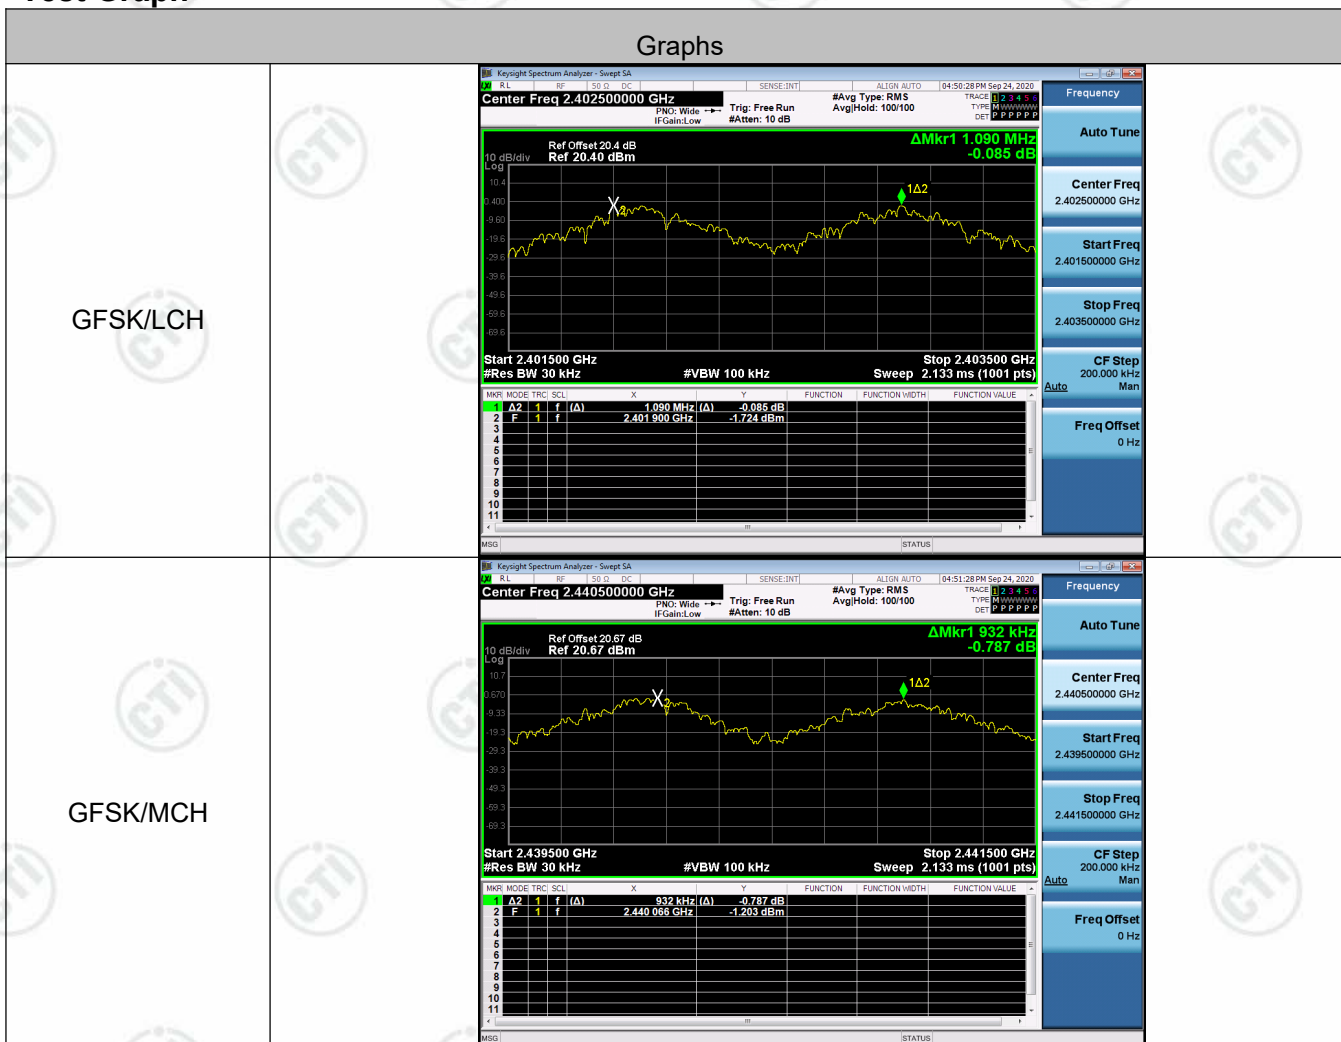

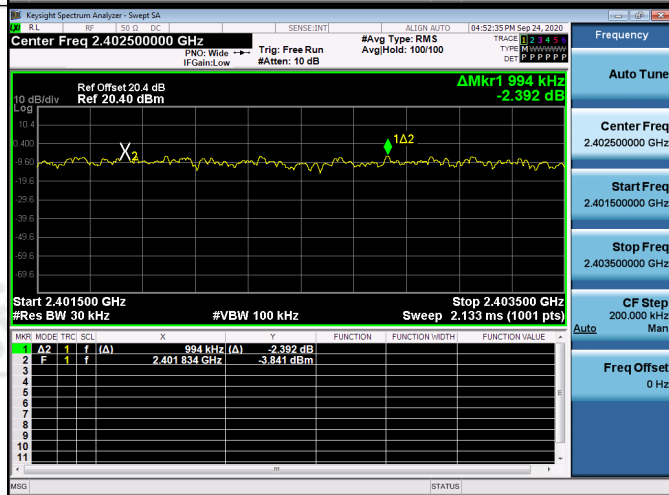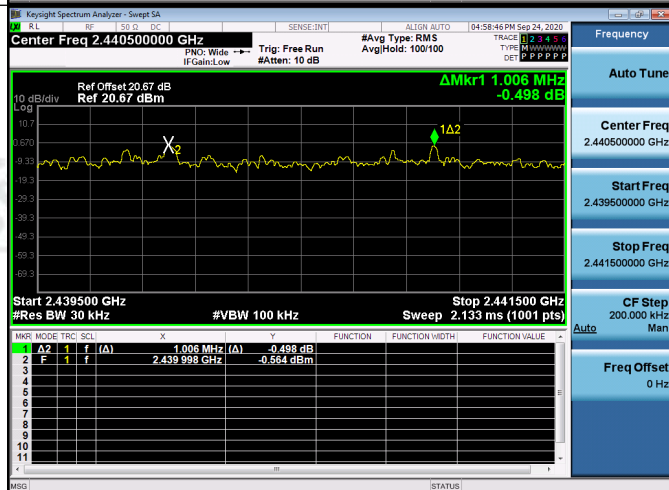GFSK/HCH	 Keyight Spectrum Analyzer - Sweep SA Center Freq 2.479500000 GHz Ref Offset 20.67 dB Ref 20.67 dBm ΔMkr1 1.034 MHz 1.267 dB Start 2.478500 GHz #Res BW 30 kHz Stop 2.480500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.034 MHz</td><td>(Δ)</td><td></td><td>1.267 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.478 999 GHz</td><td></td><td></td><td>-129.7 dBm</td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	1.034 MHz	(Δ)		1.267 dB	2	F	1	f		2.478 999 GHz			-129.7 dBm
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	1.034 MHz	(Δ)		1.267 dB																				
2	F	1	f		2.478 999 GHz			-129.7 dBm																				
$\pi/4$ DQPSK/LCH	 Keyight Spectrum Analyzer - Sweep SA Center Freq 2.402500000 GHz Ref Offset 20.40 dB Ref 20.40 dBm ΔMkr1 994 kHz -2.392 dB Start 2.401500 GHz #Res BW 30 kHz Stop 2.403500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>994 kHz</td><td>(Δ)</td><td></td><td>-2.392 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401 834 GHz</td><td></td><td></td><td>-3.441 dBm</td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	994 kHz	(Δ)		-2.392 dB	2	F	1	f		2.401 834 GHz			-3.441 dBm
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	994 kHz	(Δ)		-2.392 dB																				
2	F	1	f		2.401 834 GHz			-3.441 dBm																				
$\pi/4$ DQPSK/MCH	 Keyight Spectrum Analyzer - Sweep SA Center Freq 2.440500000 GHz Ref Offset 20.67 dB Ref 20.67 dBm ΔMkr1 1.006 MHz -0.498 dB Start 2.439500 GHz #Res BW 30 kHz Stop 2.441500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.006 MHz</td><td>(Δ)</td><td></td><td>-0.498 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.439 998 GHz</td><td></td><td></td><td>-0.564 dBm</td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	1.006 MHz	(Δ)		-0.498 dB	2	F	1	f		2.439 998 GHz			-0.564 dBm
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	1.006 MHz	(Δ)		-0.498 dB																				
2	F	1	f		2.439 998 GHz			-0.564 dBm																				

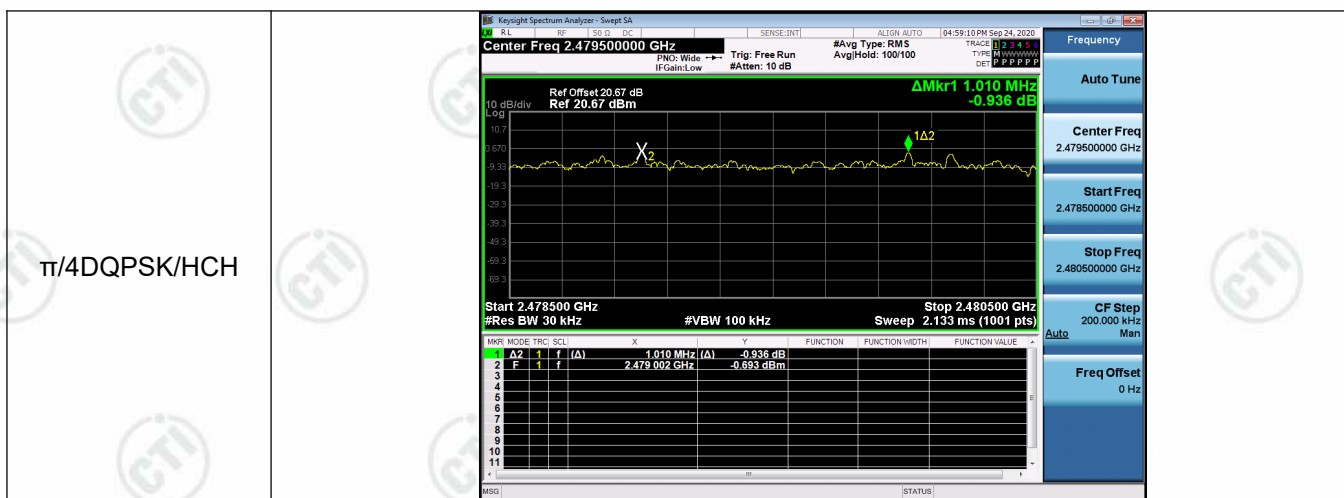

Appendix C): Dwell Time

Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


Test Setup

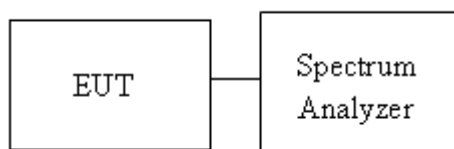

Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.37493	320	0.12	0.30	PASS
GFSK	DH1	MCH	0.37494	320	0.12	0.30	PASS
GFSK	DH1	HCH	0.374933	320	0.12	0.30	PASS
GFSK	DH3	LCH	1.63147	160	0.261	0.65	PASS
GFSK	DH3	MCH	1.6302	160	0.261	0.65	PASS
GFSK	DH3	HCH	1.6302	160	0.261	0.65	PASS
GFSK	DH5	LCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	MCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	HCH	2.8612	106.7	0.305	0.76	PASS

Test Graph

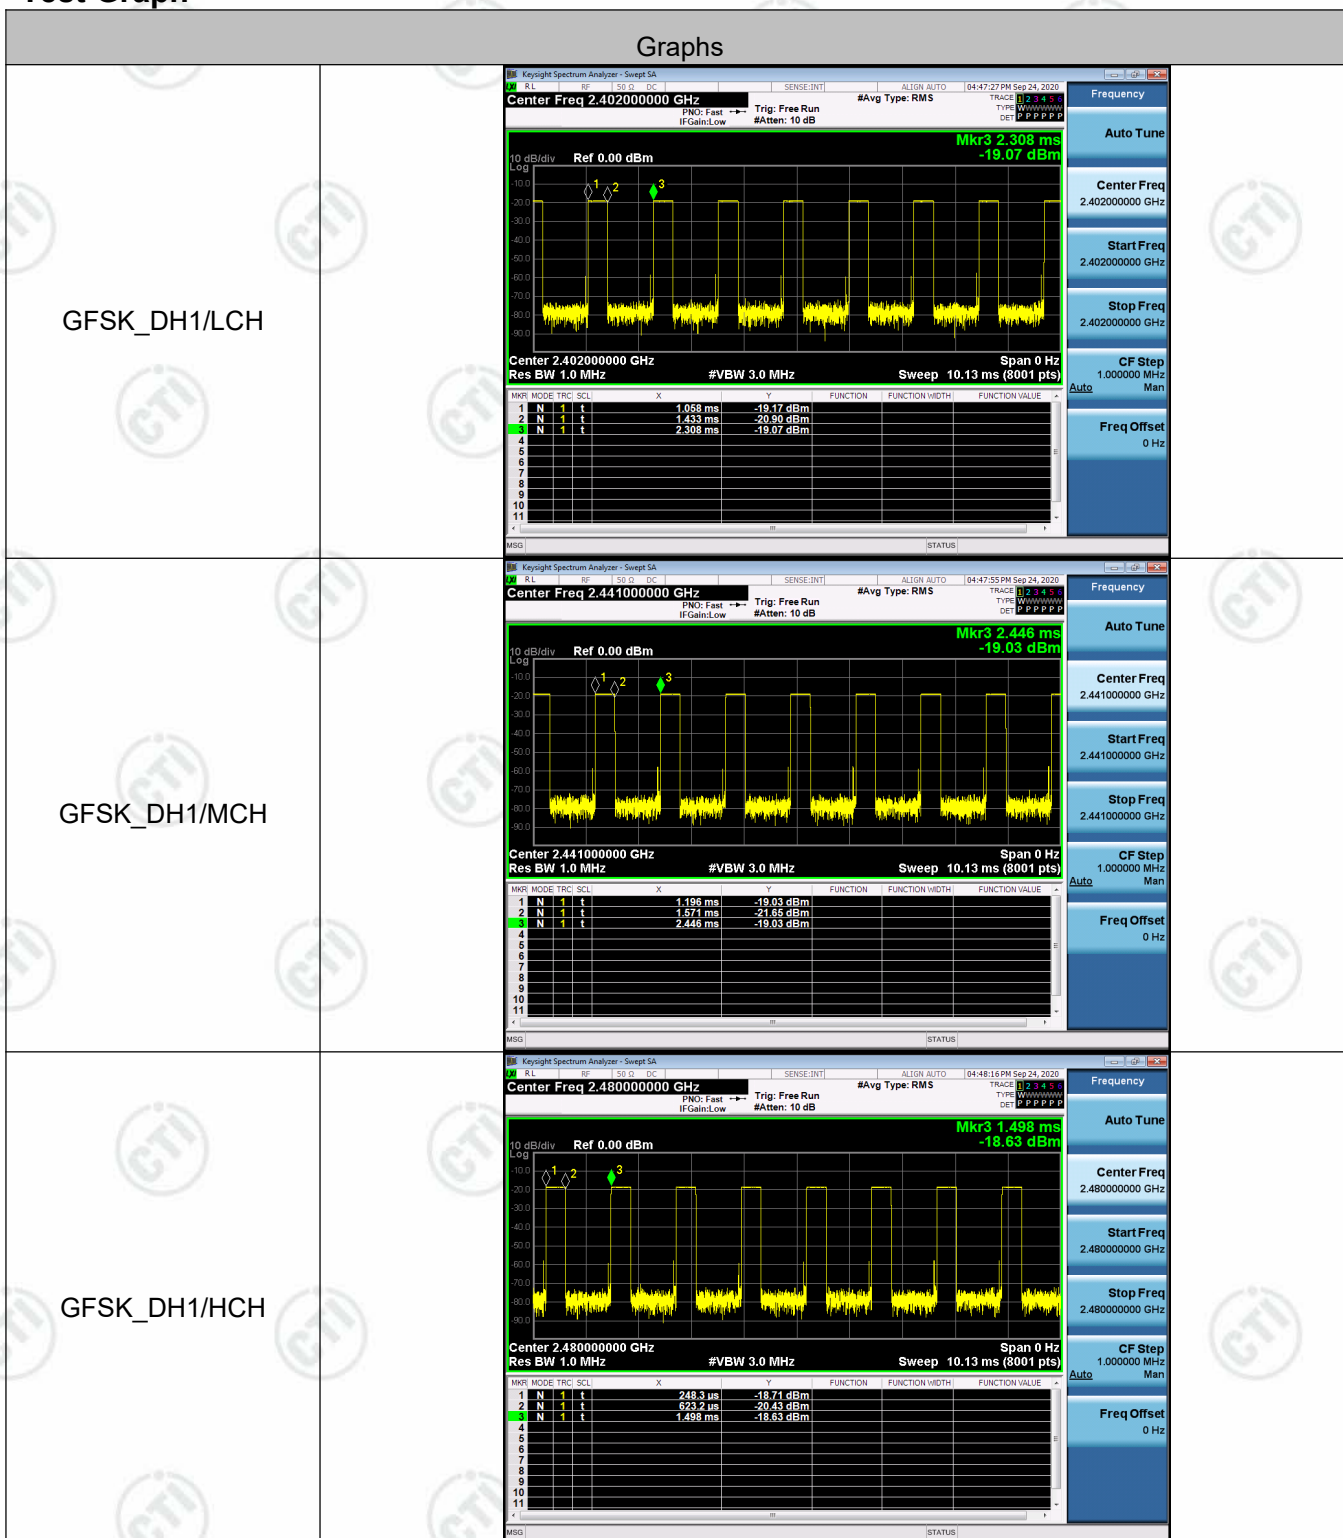

GFSK_DH3/LCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 4.829 ms -19.15 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.328 ms</td><td>-19.87 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.969 ms</td><td>-21.54 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.829 ms</td><td>-19.15 dBm</td><td></td><td></td><td></td></tr></tbody></table> MSG STATUS Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.328 ms	-19.87 dBm				2	N	1	t	3.969 ms	-21.54 dBm				3	N	1	t	4.829 ms	-19.15 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	2.328 ms	-19.87 dBm																																
2	N	1	t	3.969 ms	-21.54 dBm																																
3	N	1	t	4.829 ms	-19.15 dBm																																
GFSK_DH3/MCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 3.848 ms -19.02 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.348 ms</td><td>-19.19 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.978 ms</td><td>-19.27 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.848 ms</td><td>-19.02 dBm</td><td></td><td></td><td></td></tr></tbody></table> MSG STATUS Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.348 ms	-19.19 dBm				2	N	1	t	2.978 ms	-19.27 dBm				3	N	1	t	3.848 ms	-19.02 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.348 ms	-19.19 dBm																																
2	N	1	t	2.978 ms	-19.27 dBm																																
3	N	1	t	3.848 ms	-19.02 dBm																																
GFSK_DH3/HCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 3.671 ms -18.63 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.170 ms</td><td>-18.89 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.801 ms</td><td>-18.86 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.671 ms</td><td>-18.63 dBm</td><td></td><td></td><td></td></tr></tbody></table> MSG STATUS Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.170 ms	-18.89 dBm				2	N	1	t	2.801 ms	-18.86 dBm				3	N	1	t	3.671 ms	-18.63 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.170 ms	-18.89 dBm																																
2	N	1	t	2.801 ms	-18.86 dBm																																
3	N	1	t	3.671 ms	-18.63 dBm																																

GFSK_DH5/LCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 5.713 ms -18.97 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.960 ms</td><td>-18.98 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.821 ms</td><td>-19.02 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.713 ms</td><td>-18.97 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.960 ms	-18.98 dBm				2	N	1	t	4.821 ms	-19.02 dBm				3	N	1	t	5.713 ms	-18.97 dBm			
MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.960 ms	-18.98 dBm																																
2	N	1	t	4.821 ms	-19.02 dBm																																
3	N	1	t	5.713 ms	-18.97 dBm																																
GFSK_DH5/MCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 6.964 ms -19.02 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>3.211 ms</td><td>-19.00 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>6.072 ms</td><td>-19.05 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.964 ms</td><td>-19.02 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	3.211 ms	-19.00 dBm				2	N	1	t	6.072 ms	-19.05 dBm				3	N	1	t	6.964 ms	-19.02 dBm			
MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	3.211 ms	-19.00 dBm																																
2	N	1	t	6.072 ms	-19.05 dBm																																
3	N	1	t	6.964 ms	-19.02 dBm																																
GFSK_DH5/HCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 3.855 ms -18.56 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><thead><tr><th>MRK</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>101.2 ms</td><td>-18.55 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.962 ms</td><td>-18.61 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.855 ms</td><td>-18.56 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz	MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	101.2 ms	-18.55 dBm				2	N	1	t	2.962 ms	-18.61 dBm				3	N	1	t	3.855 ms	-18.56 dBm			
MRK	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	101.2 ms	-18.55 dBm																																
2	N	1	t	2.962 ms	-18.61 dBm																																
3	N	1	t	3.855 ms	-18.56 dBm																																

Appendix D): Hopping Channel Number

Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


Test Setup



Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS

Test Graph

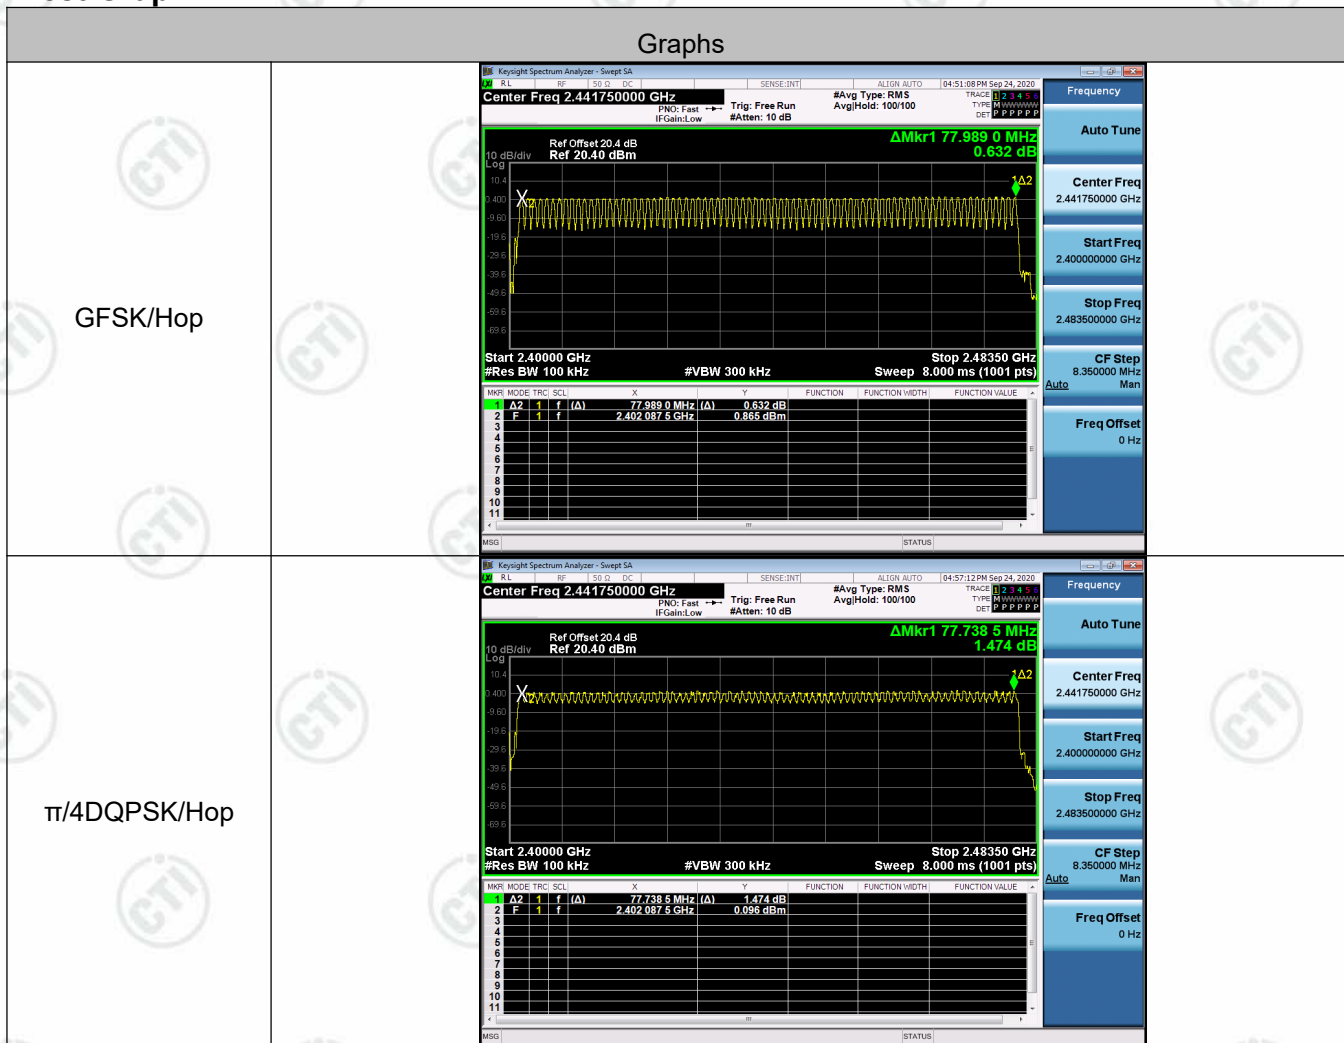

Appendix E): Conducted Peak Output Power

Test Limit

According to §15.247(b)(1).

Peak output power:

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
 - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - b) RBW > 20 dB bandwidth of the emission being measured.
 - c) VBW ≥ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow trace to stabilize.
 - h) Use the marker-to-peak function to set the marker to the peak of the emission
4. Measure and record the result in the test report.


Test Setup






Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	1.779	PASS
GFSK	MCH	2.076	PASS
GFSK	HCH	2.443	PASS
$\pi/4$ DQPSK	LCH	2.430	PASS
$\pi/4$ DQPSK	MCH	2.675	PASS
$\pi/4$ DQPSK	HCH	3.055	PASS

Test Graph

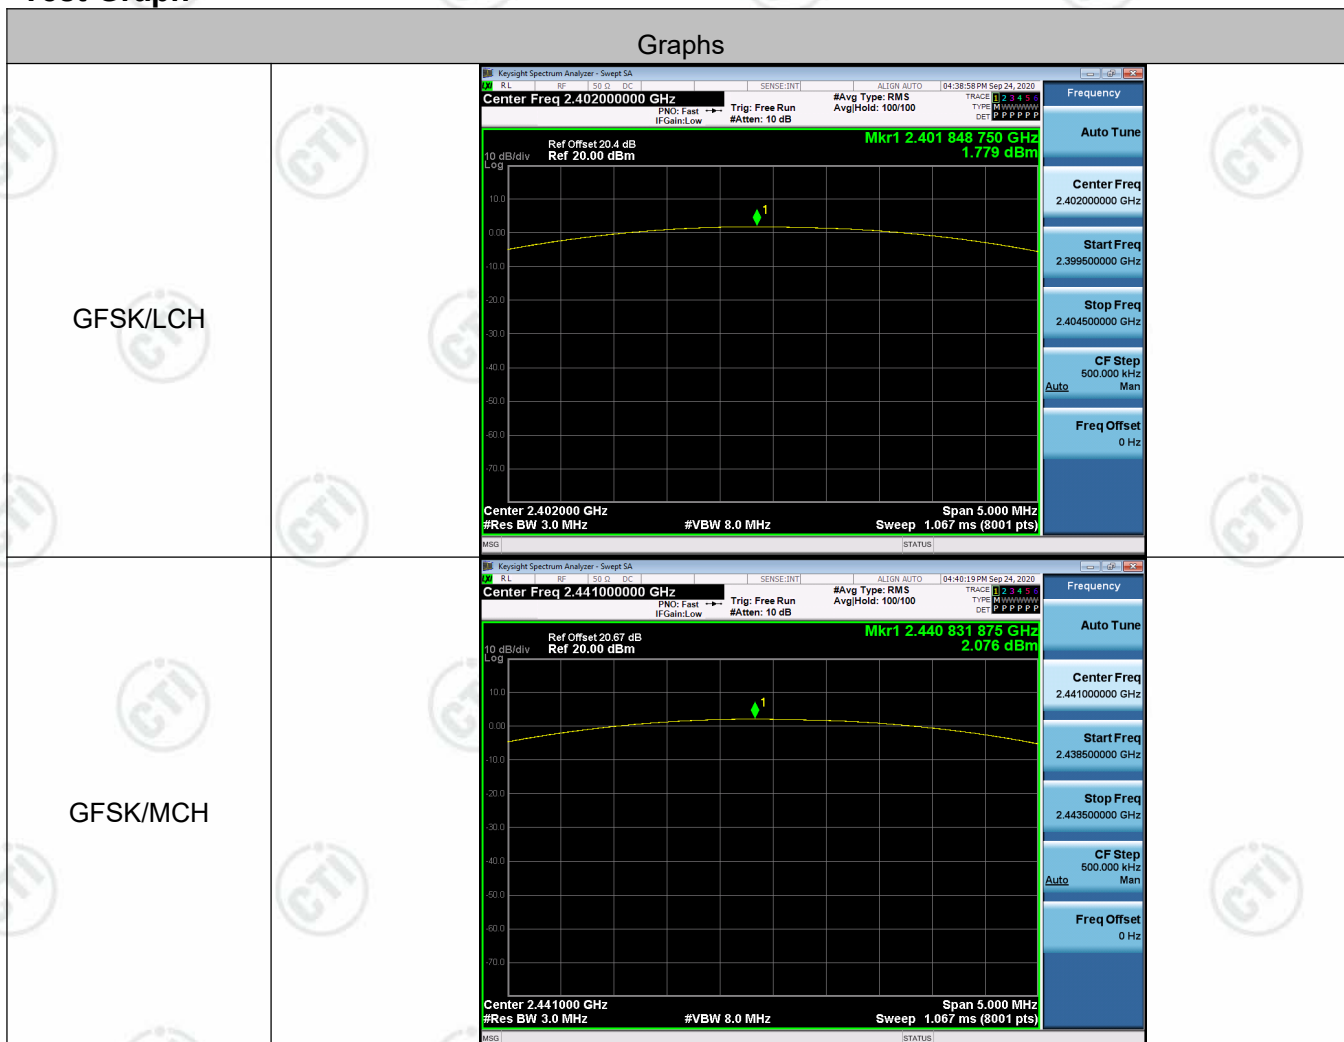

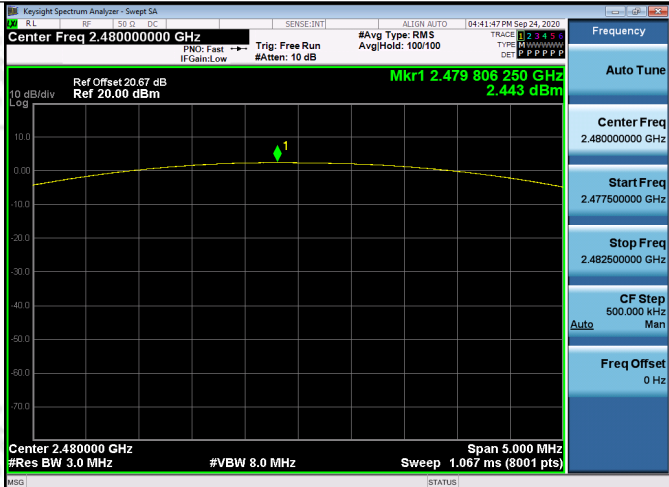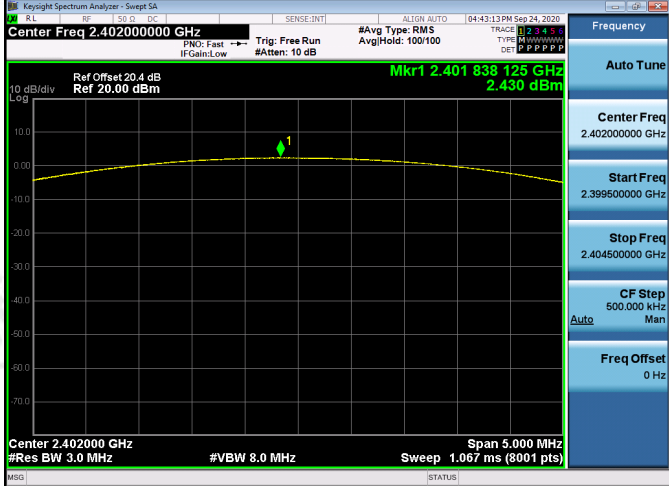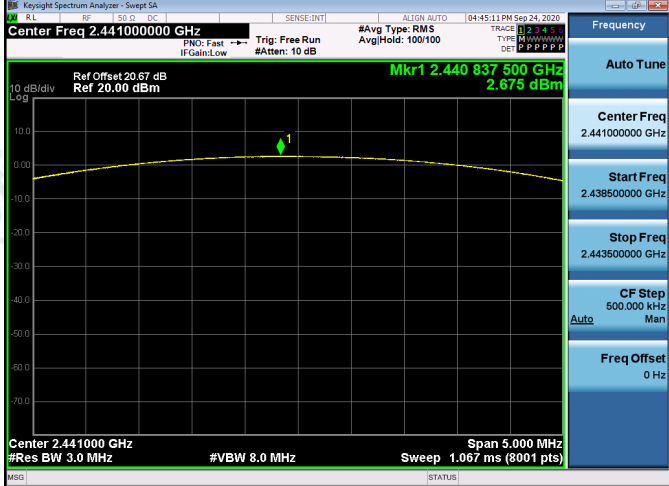GFSK/HCH	
π /4DQPSK/LCH	
π /4DQPSK/MCH	



Appendix F): Band-edge for RF Conducted Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


Test Setup


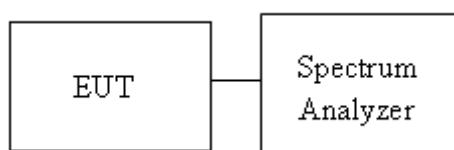



Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	1.143	Off	-59.411	-18.86	PASS
			1.187	On	-57.689	-18.81	PASS
GFSK	HCH	2480	1.257	Off	-45.824	-18.74	PASS
			1.759	On	-48.005	-18.24	PASS
$\pi/4$ DQPSK	LCH	2402	1.158	Off	-59.084	-18.84	PASS
			1.278	On	-57.789	-18.72	PASS
$\pi/4$ DQPSK	HCH	2480	1.843	Off	-46.124	-18.16	PASS
			1.932	On	-45.661	-18.07	PASS

Test Graph

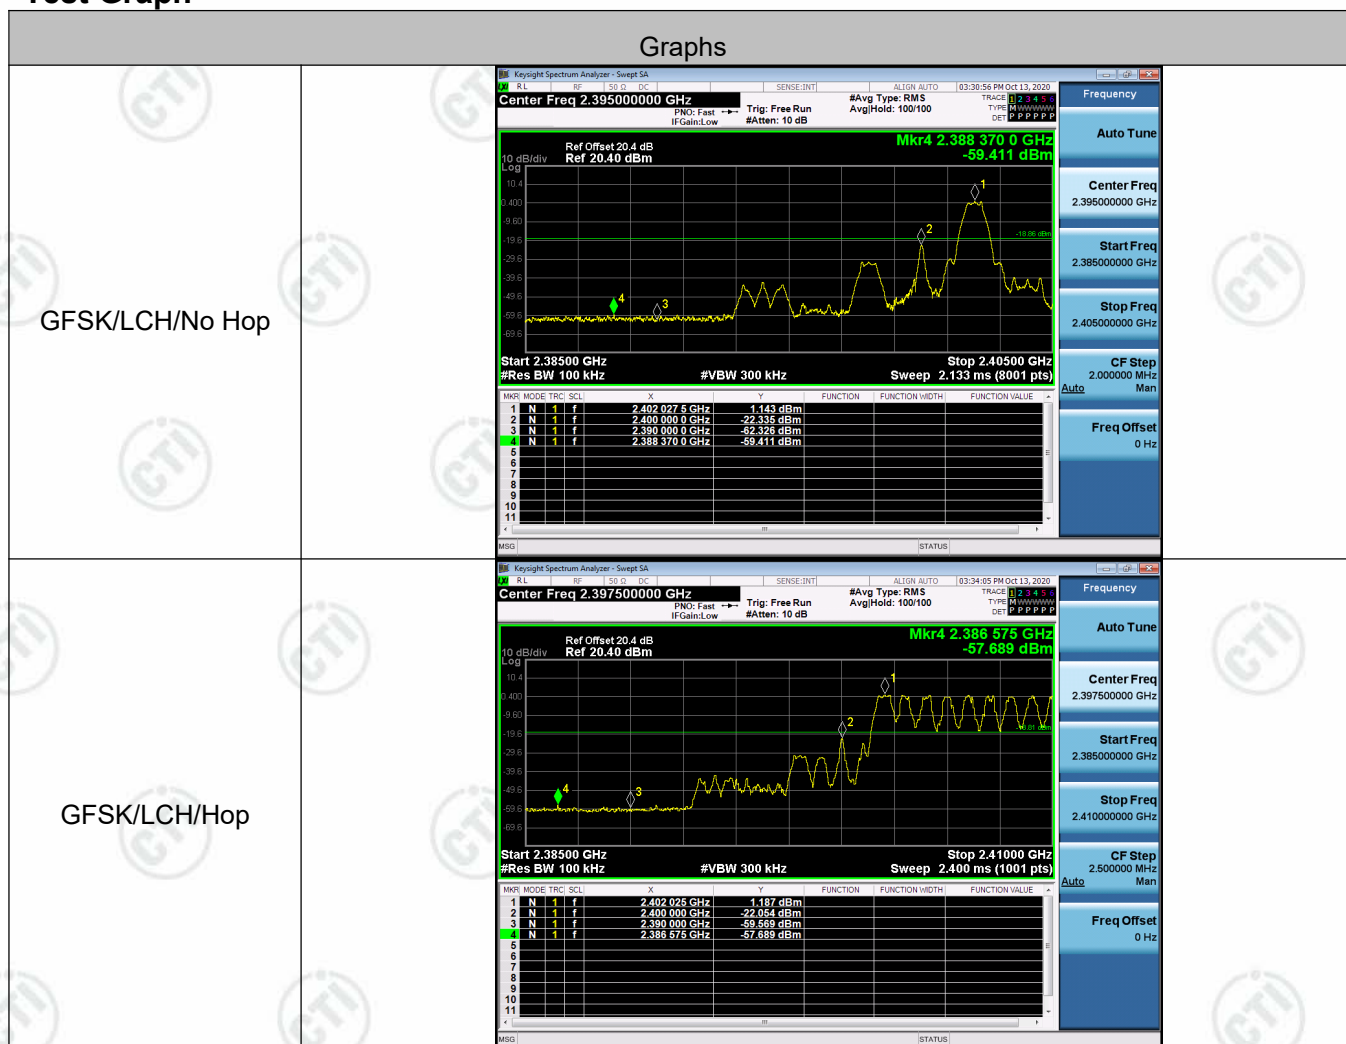

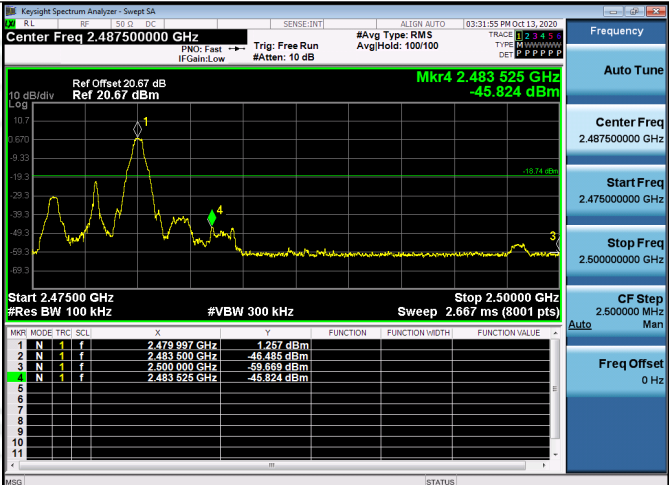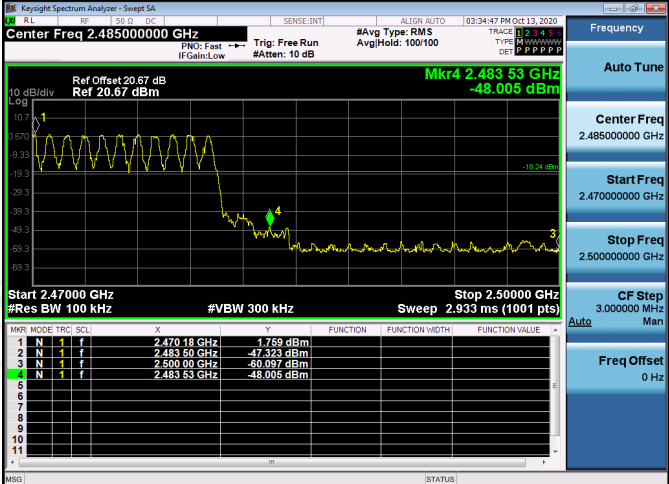GFSK/HCH/No Hop	
GFSK/HCH/Hop	
π/4DQPSK/LCH/No Hop	

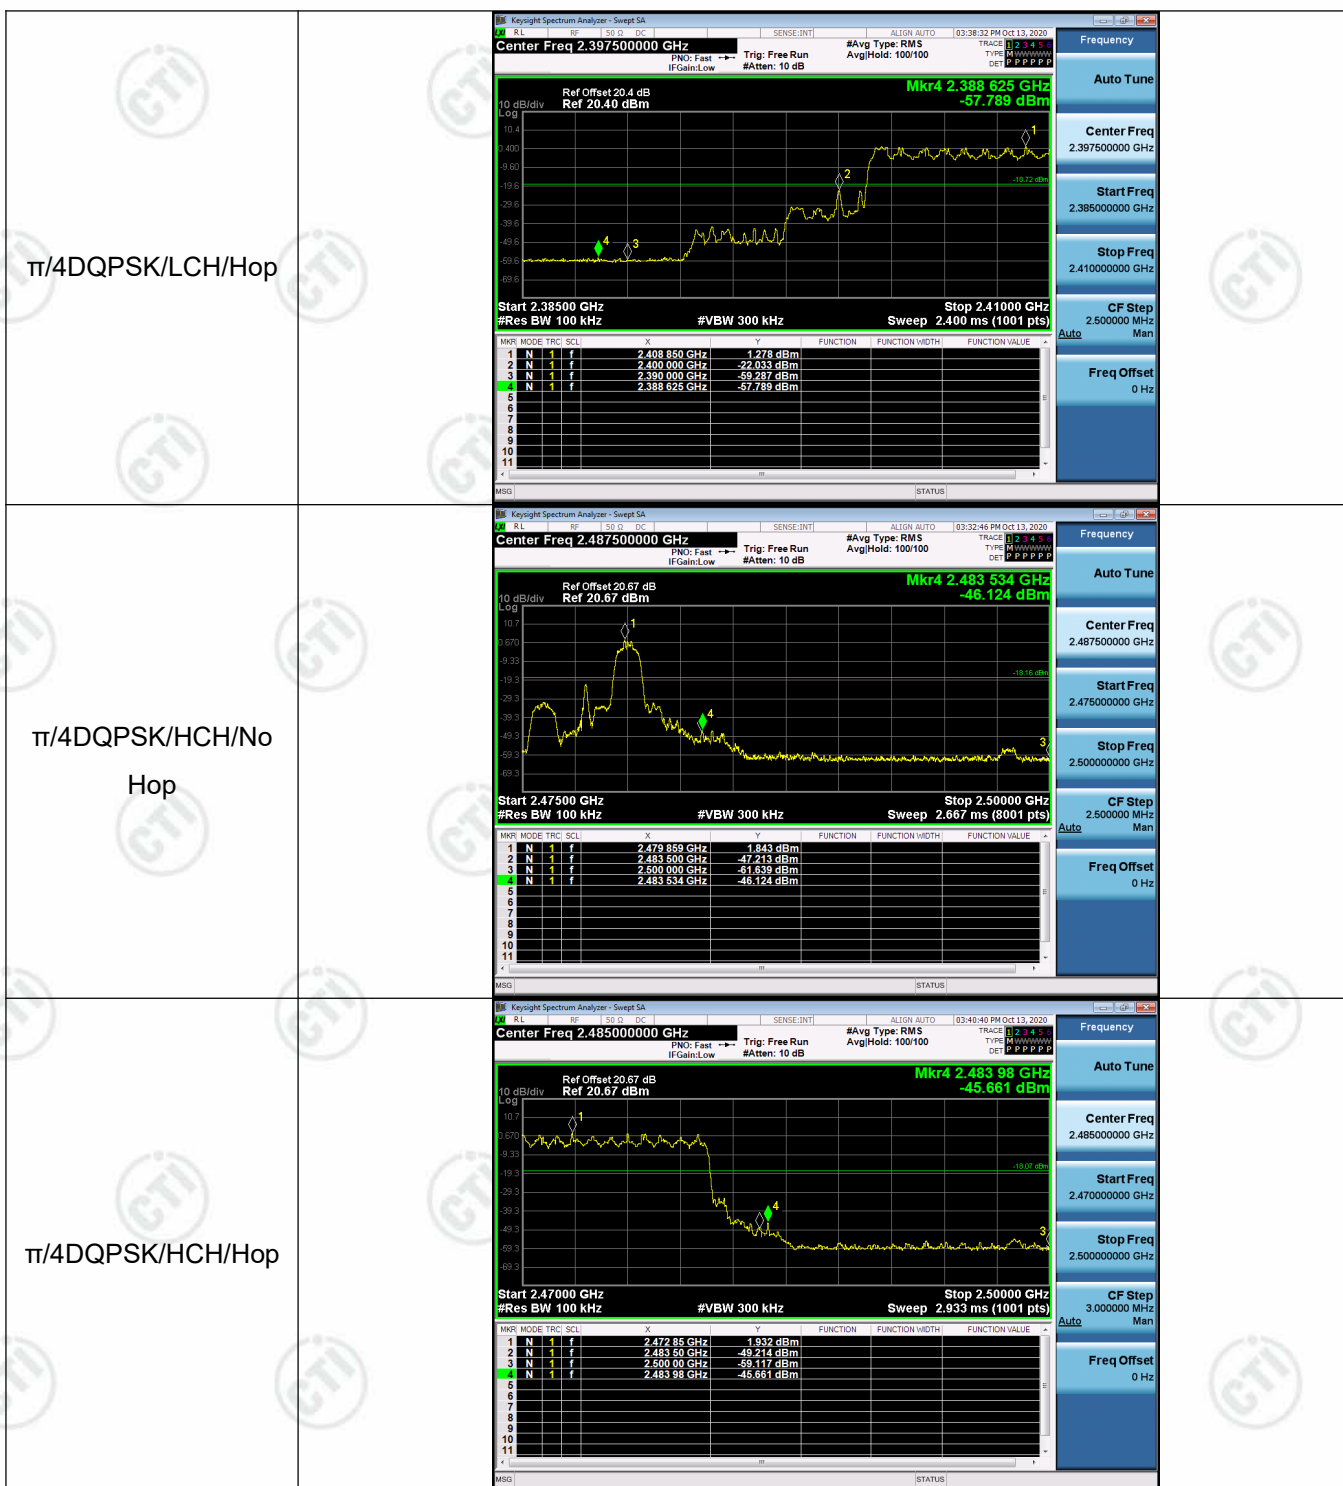

Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

Test Setup




Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	1.230	<Limit	PASS
GFSK	MCH	1.534	<Limit	PASS
GFSK	HCH	1.811	<Limit	PASS
$\pi/4$ DQPSK	LCH	1.383	<Limit	PASS
$\pi/4$ DQPSK	MCH	1.428	<Limit	PASS
$\pi/4$ DQPSK	HCH	2.046	<Limit	PASS


Test Graph




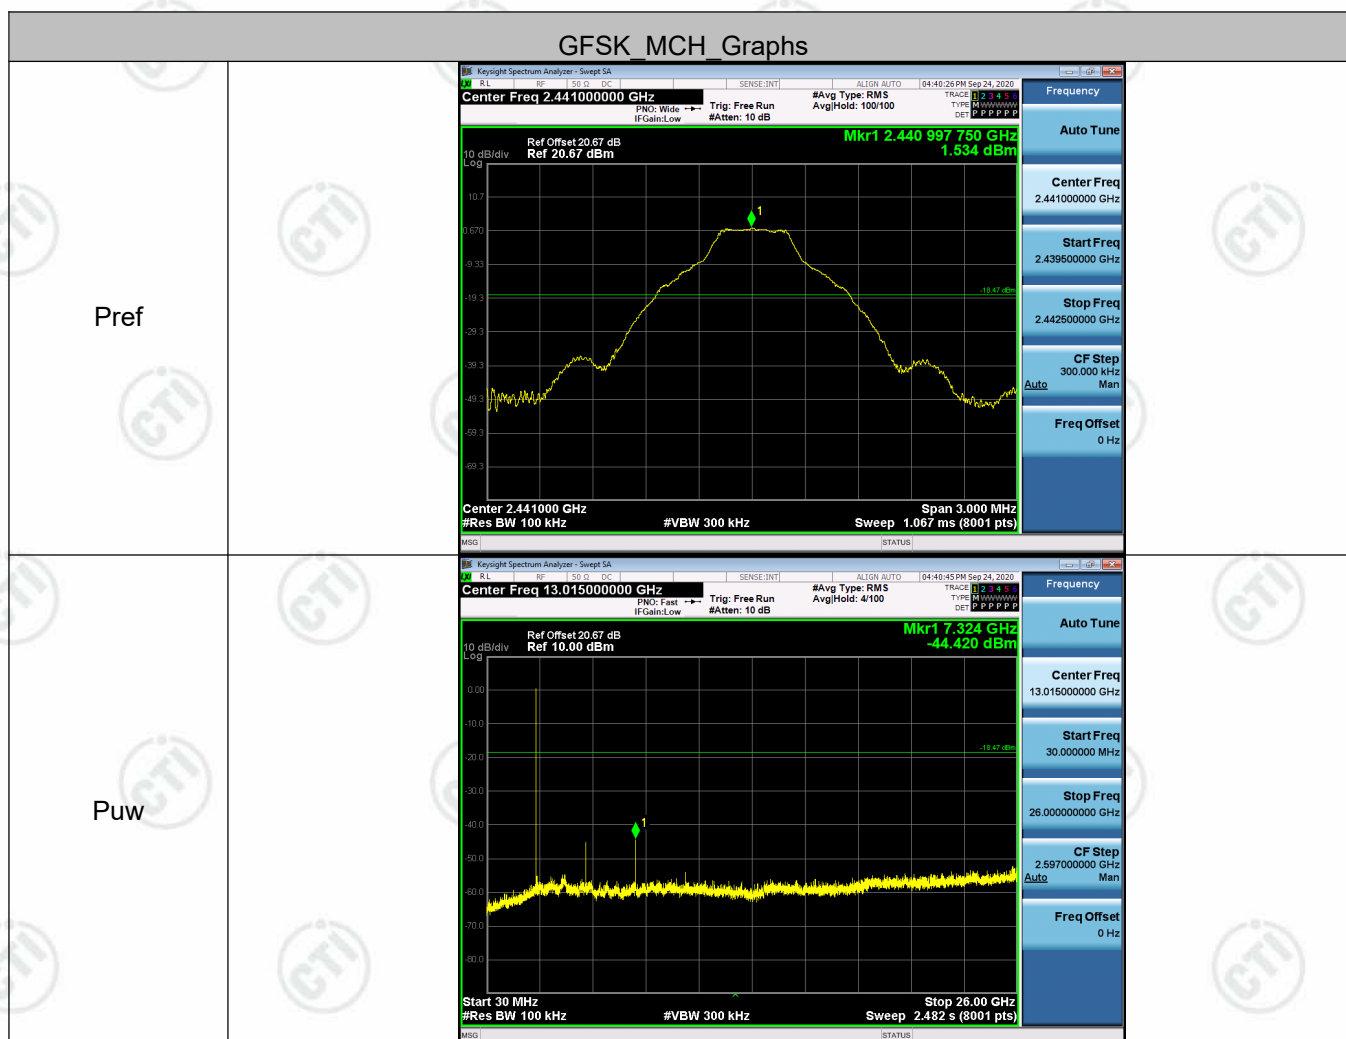



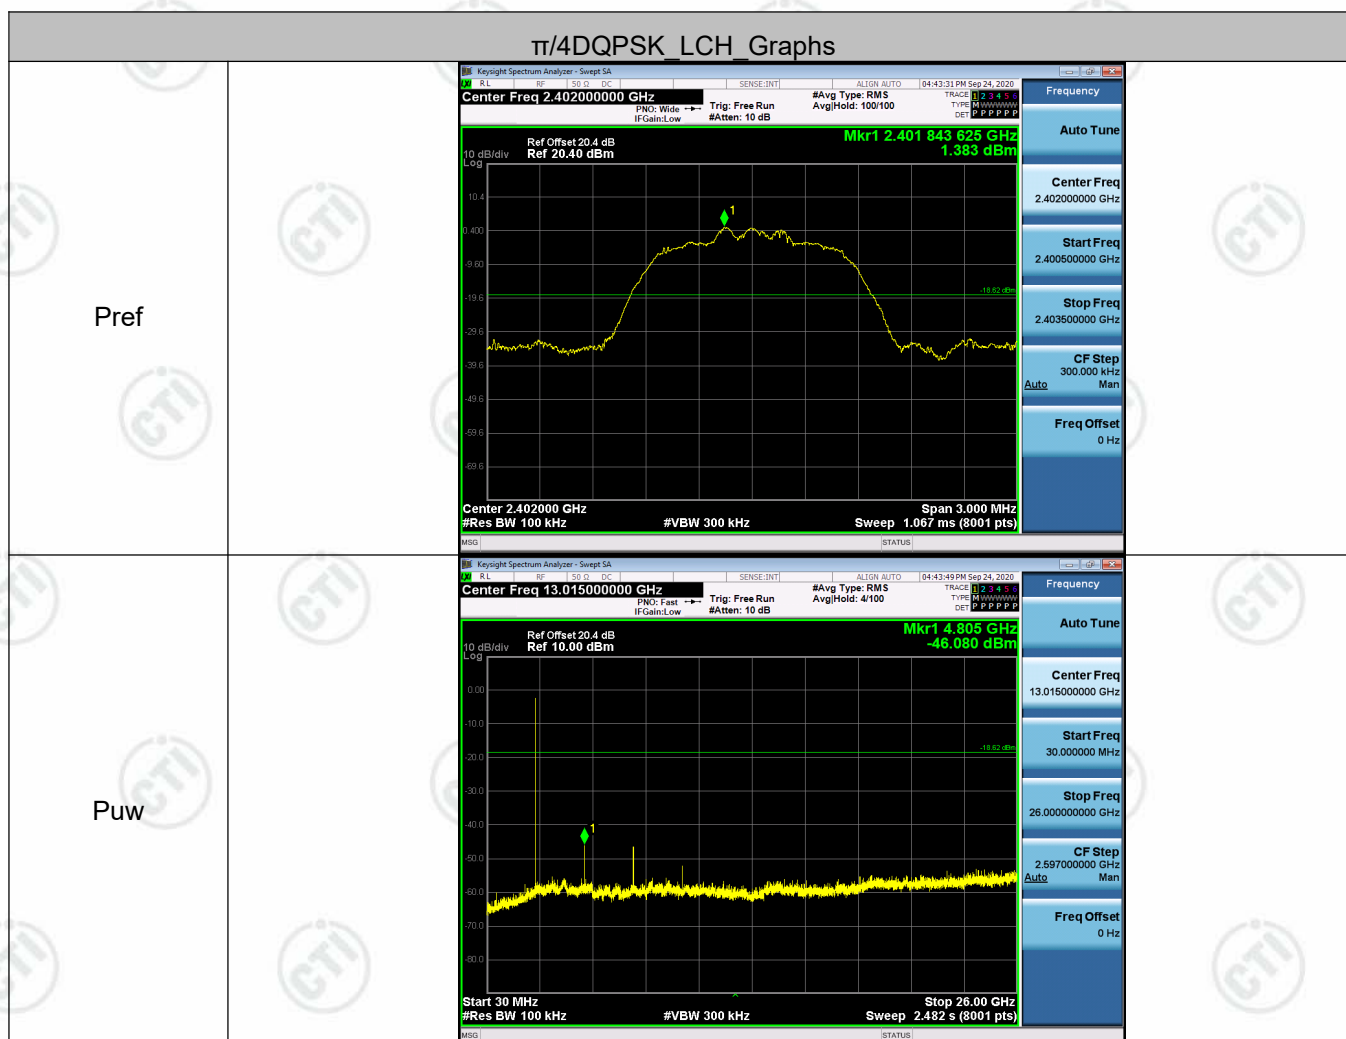

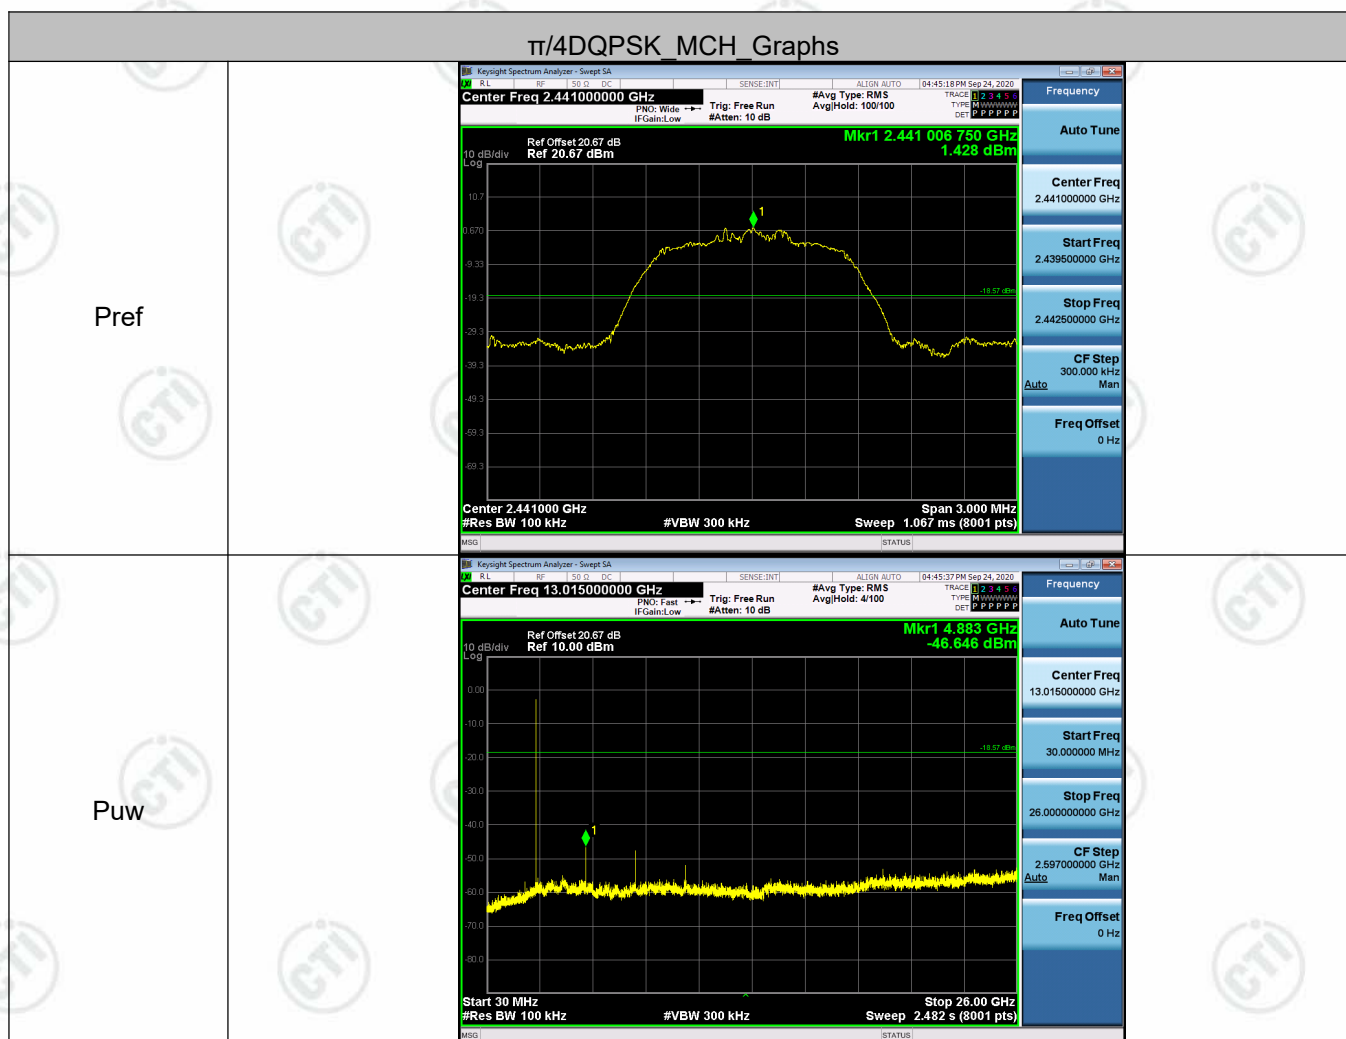

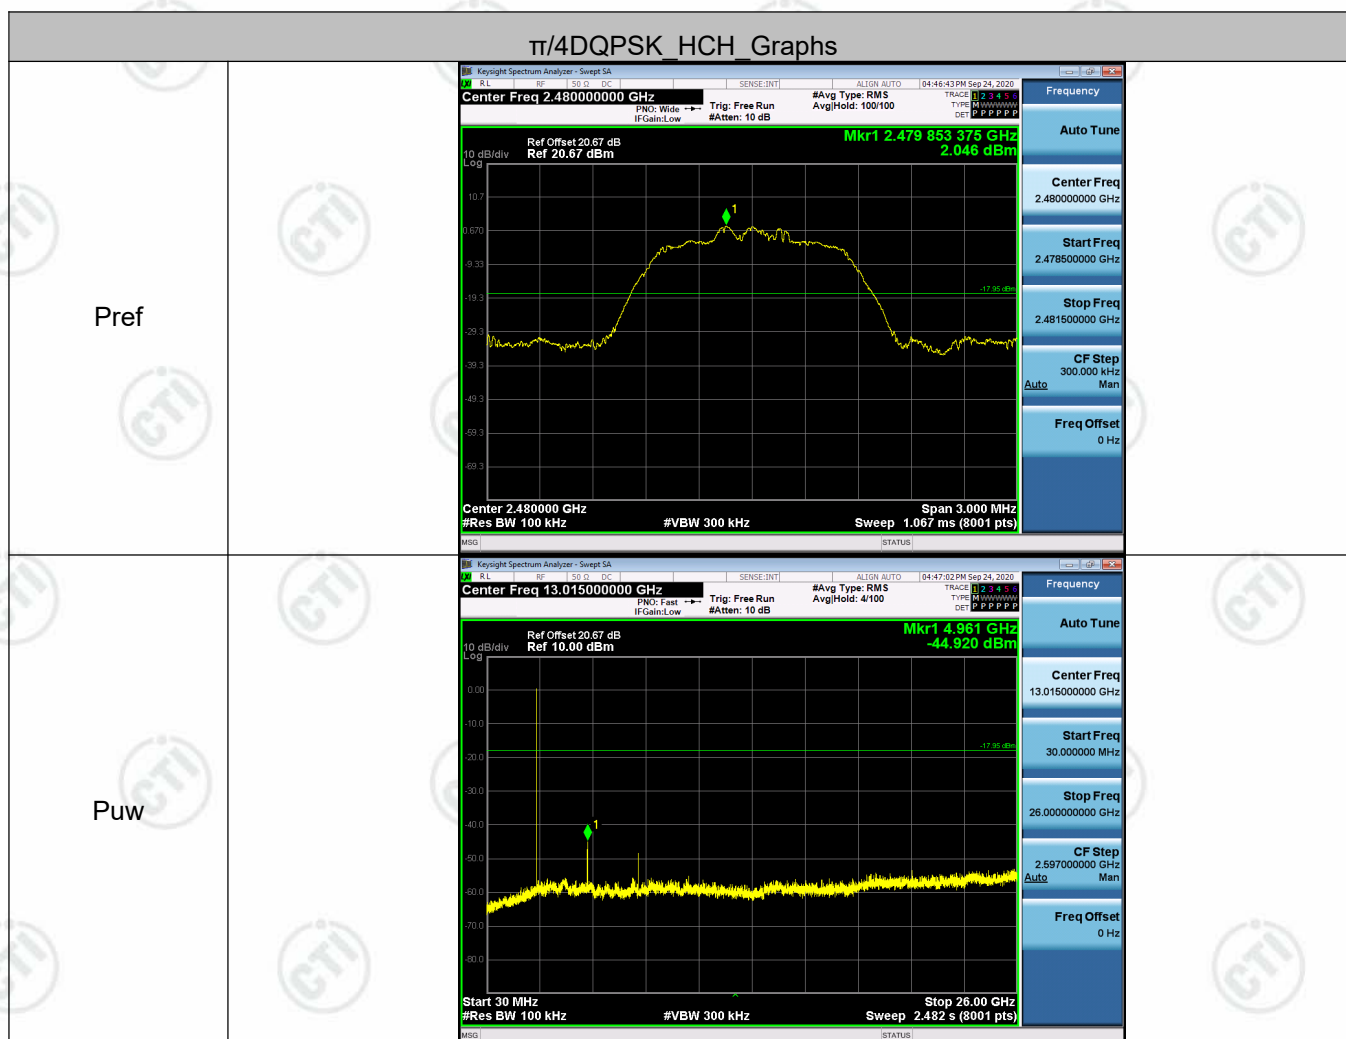

Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I) Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

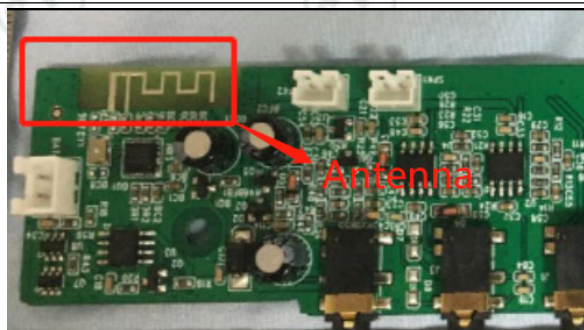

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi

Appendix J) AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency			


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were


detected.

Live line:

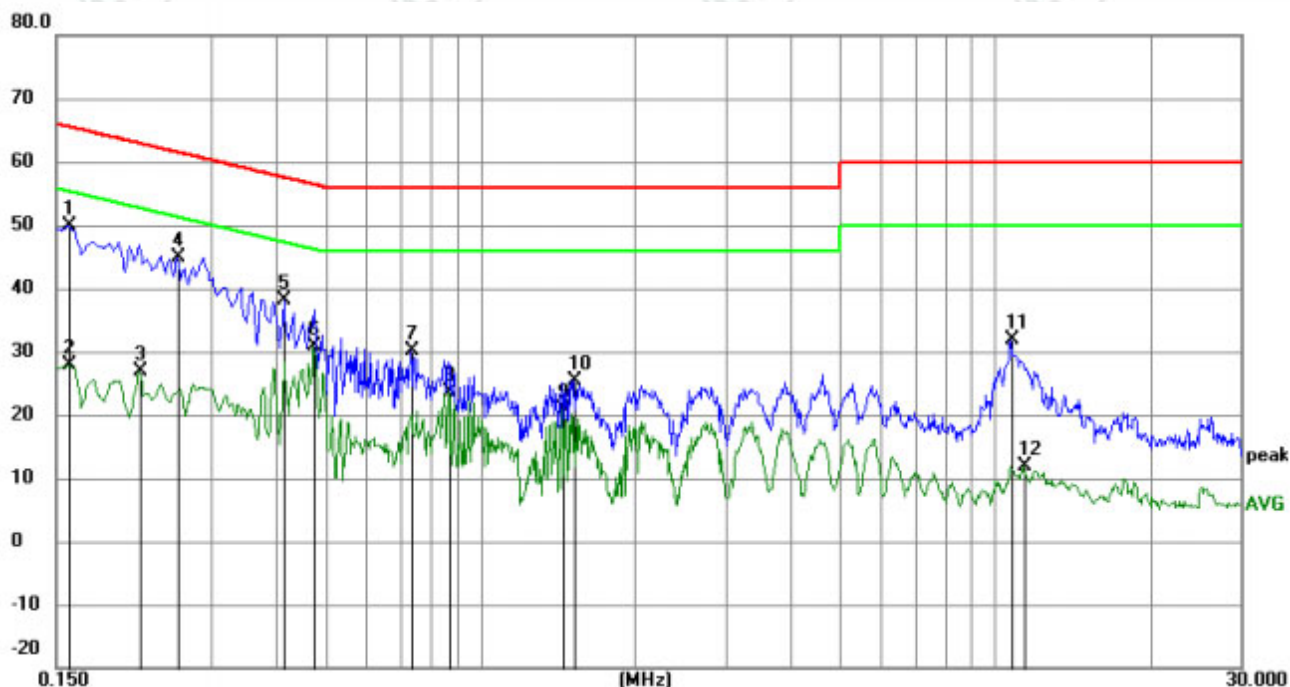

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1590	40.03	9.87	49.90	65.52	-15.62	QP	
2		0.1590	17.89	9.87	27.76	55.52	-27.76	AVG	
3		0.2175	16.99	9.90	26.89	52.91	-26.02	AVG	
4		0.2580	34.85	9.99	44.84	61.50	-16.66	QP	
5		0.4155	28.19	9.97	38.16	57.54	-19.38	QP	
6		0.4740	20.80	9.96	30.76	46.44	-15.68	AVG	
7		0.7350	20.37	9.87	30.24	56.00	-25.76	QP	
8		0.8700	13.88	9.85	23.73	46.00	-22.27	AVG	
9		1.4460	11.01	9.81	20.82	46.00	-25.18	AVG	
10		1.5225	15.68	9.81	25.49	56.00	-30.51	QP	
11		10.7790	21.99	9.80	31.79	60.00	-28.21	QP	
12		11.3955	2.05	9.82	11.87	50.00	-38.13	AVG	

Neutral line:

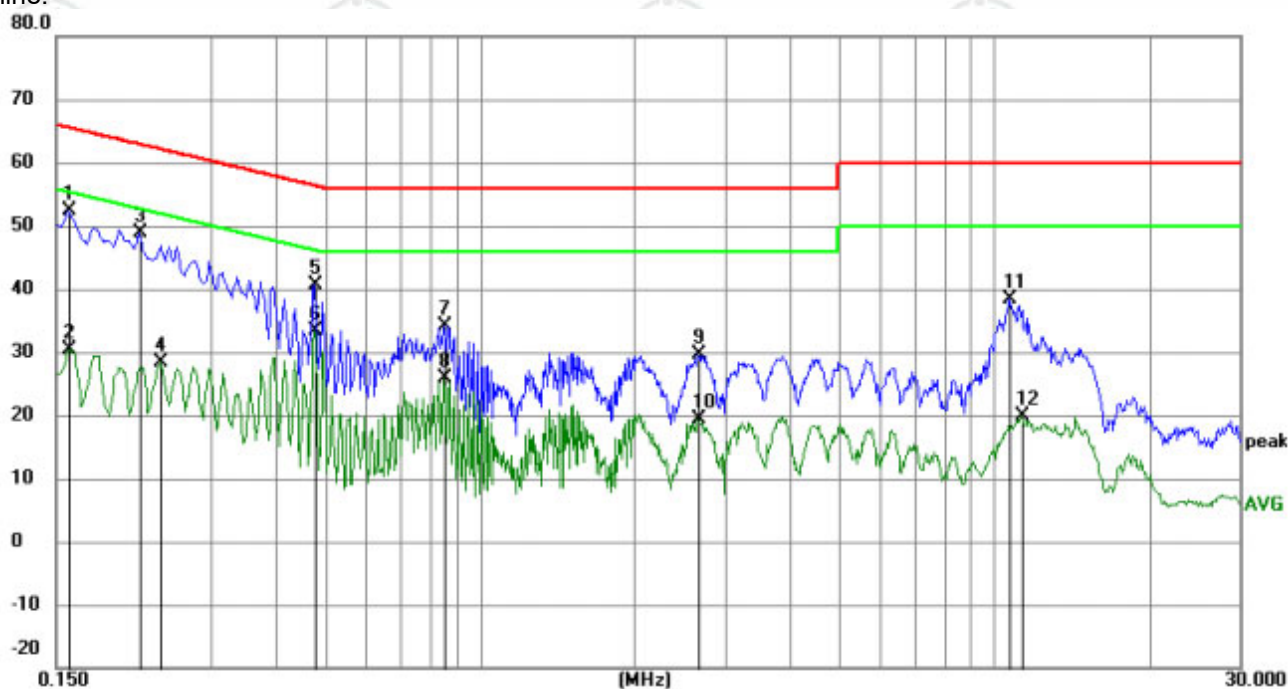

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	42.45	9.87	52.32	65.52	-13.20	QP	
2		0.1590	20.62	9.87	30.49	55.52	-25.03	AVG	
3		0.2175	38.94	9.90	48.84	62.91	-14.07	QP	
4		0.2400	18.40	9.95	28.35	52.10	-23.75	AVG	
5		0.4785	30.68	9.95	40.63	56.37	-15.74	QP	
6	*	0.4785	23.51	9.95	33.46	46.37	-12.91	AVG	
7		0.8520	24.37	9.85	34.22	56.00	-21.78	QP	
8		0.8520	15.92	9.85	25.77	46.00	-20.23	AVG	
9		2.6565	19.87	9.79	29.66	56.00	-26.34	QP	
10		2.6565	9.61	9.79	19.40	46.00	-26.60	AVG	
11		10.6935	28.61	9.80	38.41	60.00	-21.59	QP	
12		11.3055	10.02	9.82	19.84	50.00	-30.16	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

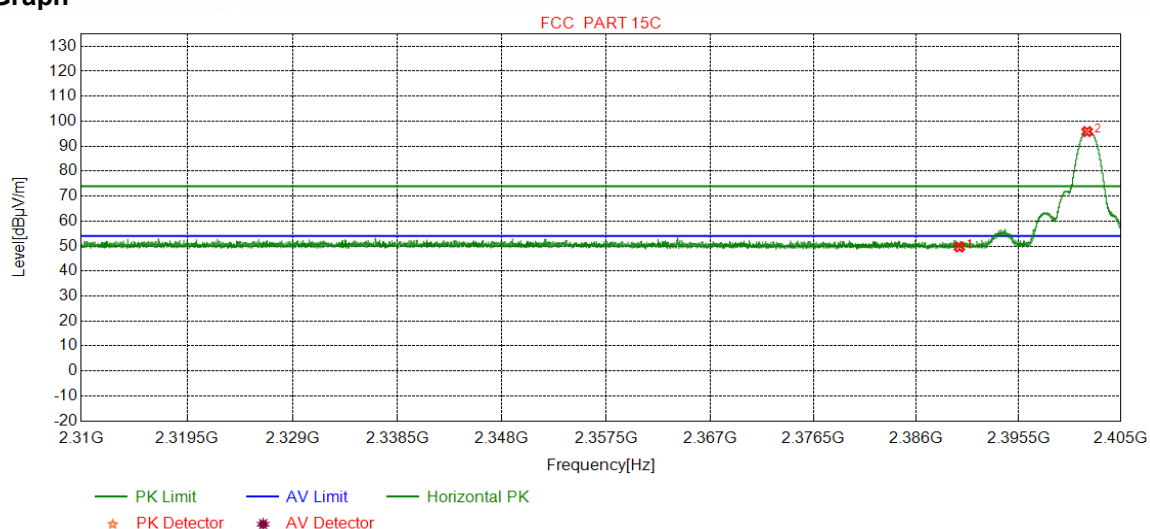

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.14	49.64	74.00	24.36	Pass	Horizontal
2	2401.8648	32.26	13.31	-43.12	93.38	95.83	74.00	-21.83	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

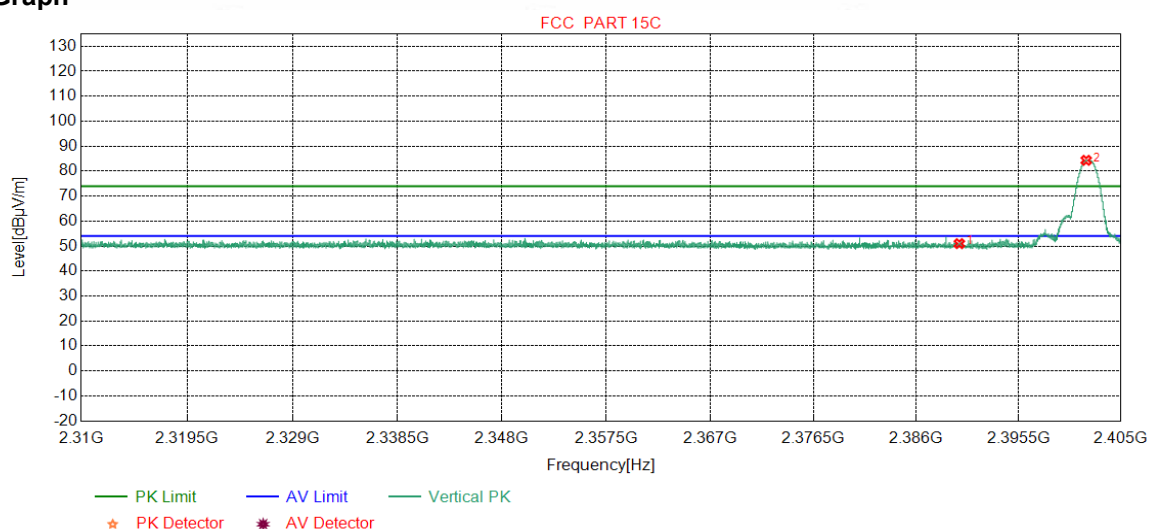

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.48	50.98	74.00	23.02	Pass	Vertical
2	2401.7825	32.26	13.31	-43.12	81.88	84.33	74.00	-10.33	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

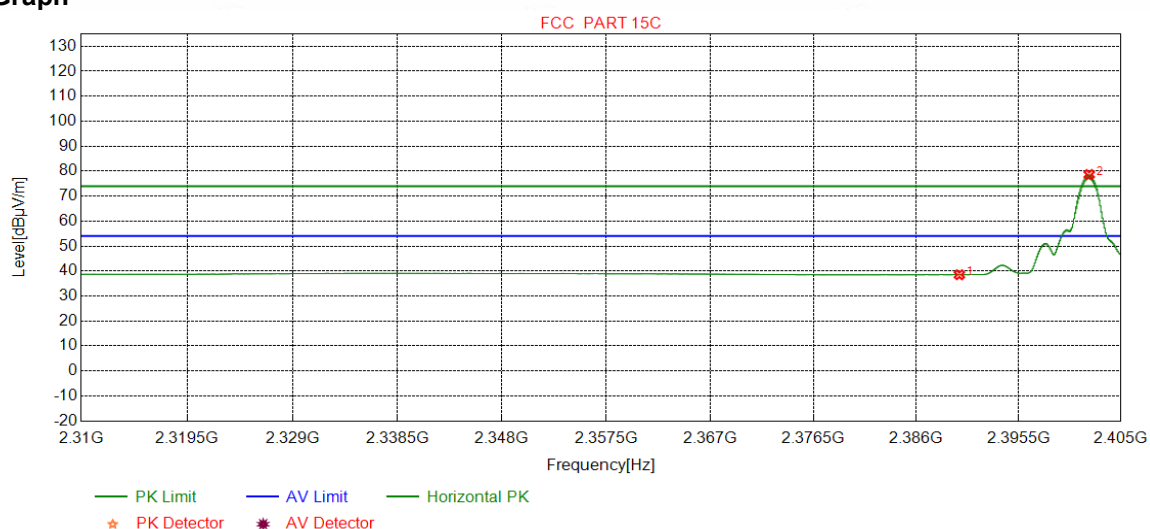

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.01	38.51	54.00	15.49	Pass	Horizontal
2	2402.0611	32.26	13.31	-43.12	76.20	78.65	54.00	-24.65	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

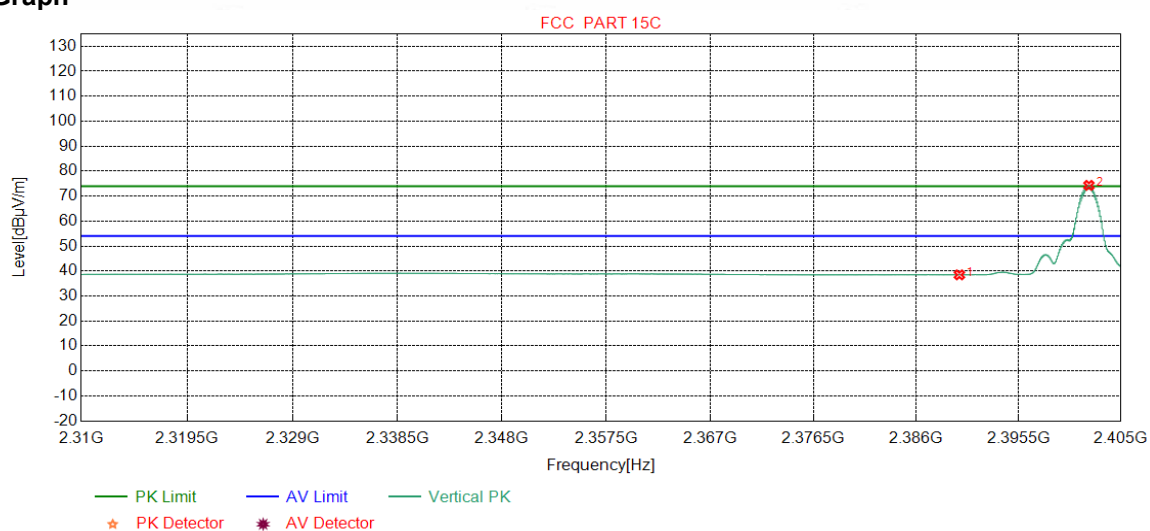

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	35.97	38.47	54.00	15.53	Pass	Vertical
2	2402.0358	32.26	13.31	-43.12	71.86	74.31	54.00	-20.31	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

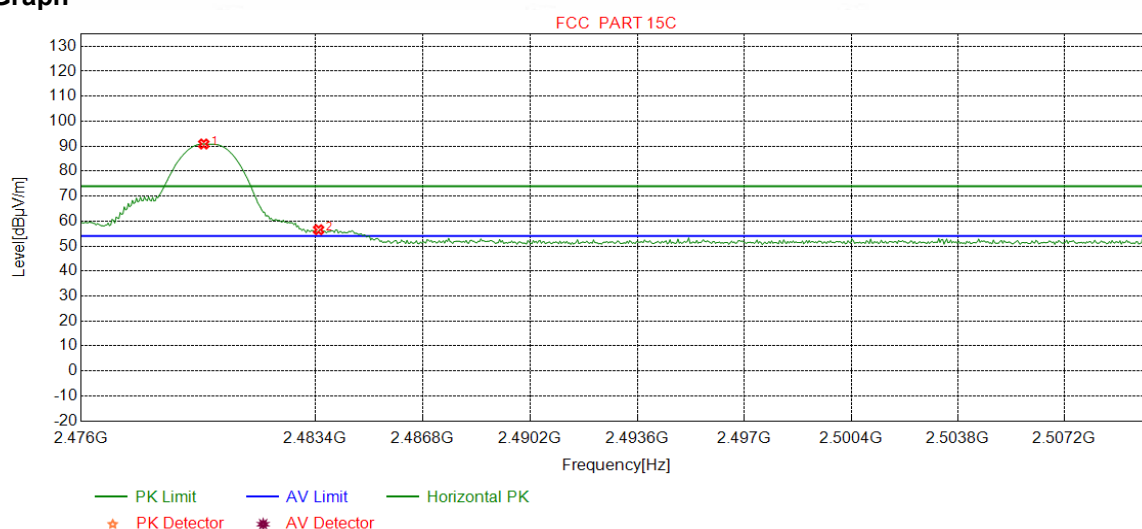

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8723	32.37	13.39	-43.10	88.21	90.87	74.00	-16.87	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	53.89	56.54	74.00	17.46	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

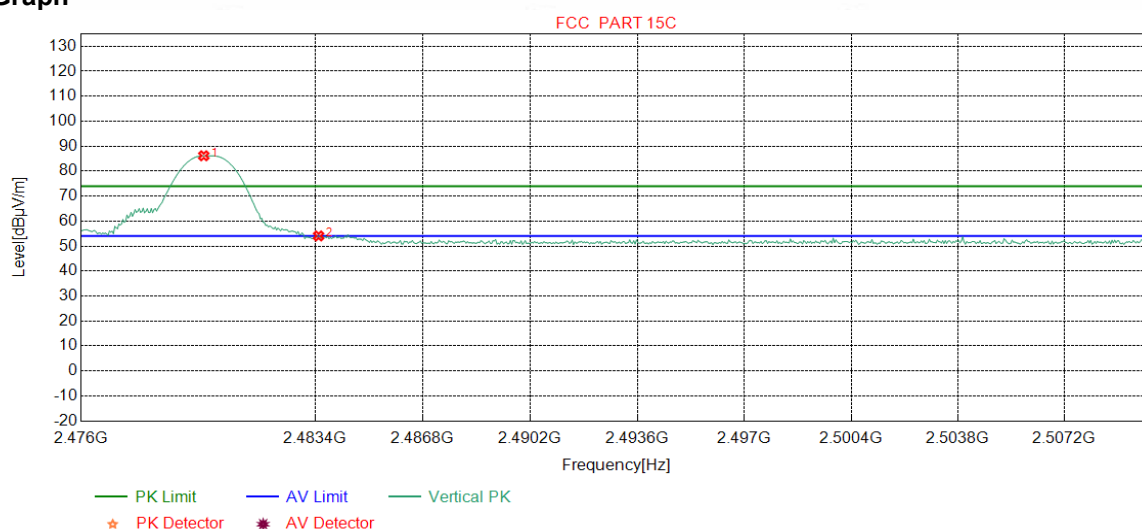

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8723	32.37	13.39	-43.10	83.50	86.16	74.00	-12.16	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	51.41	54.06	74.00	19.94	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

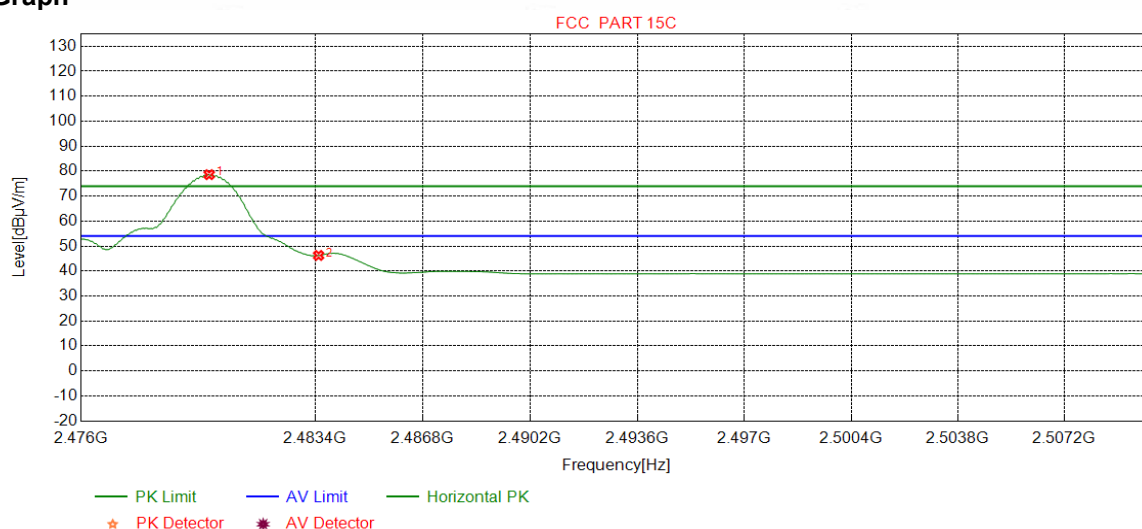

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	75.94	78.60	54.00	-24.60	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	43.60	46.25	54.00	7.75	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

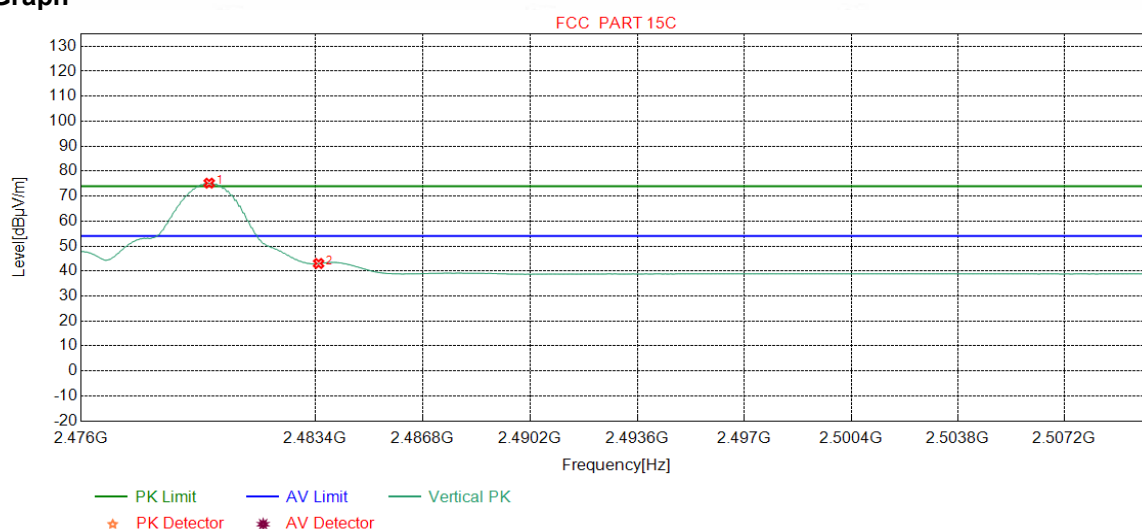

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	72.54	75.20	54.00	-21.20	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.38	43.03	54.00	10.97	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

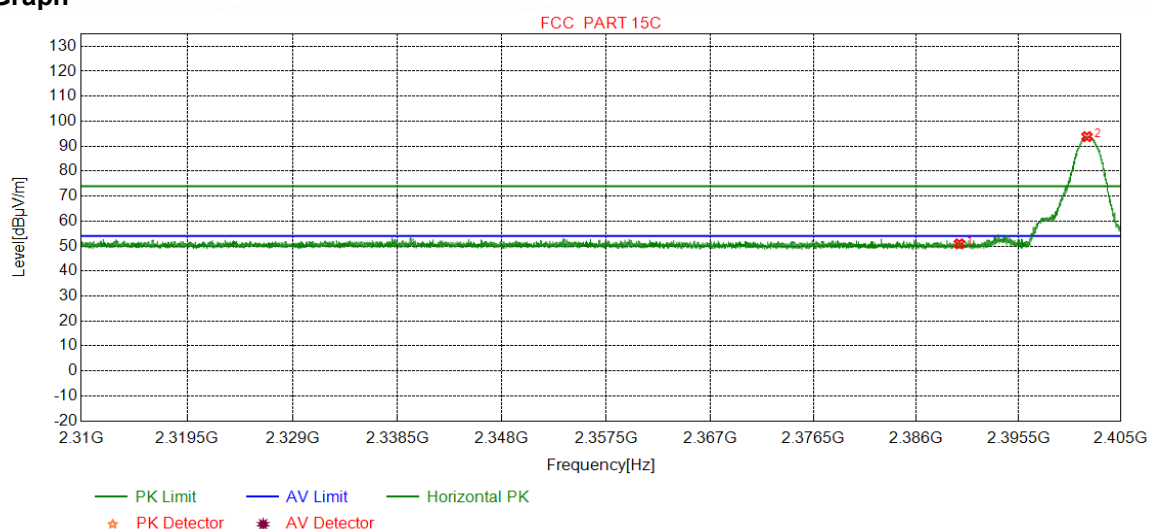

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.39	50.89	74.00	23.11	Pass	Horizontal
2	2401.8521	32.26	13.31	-43.12	91.36	93.81	74.00	-19.81	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

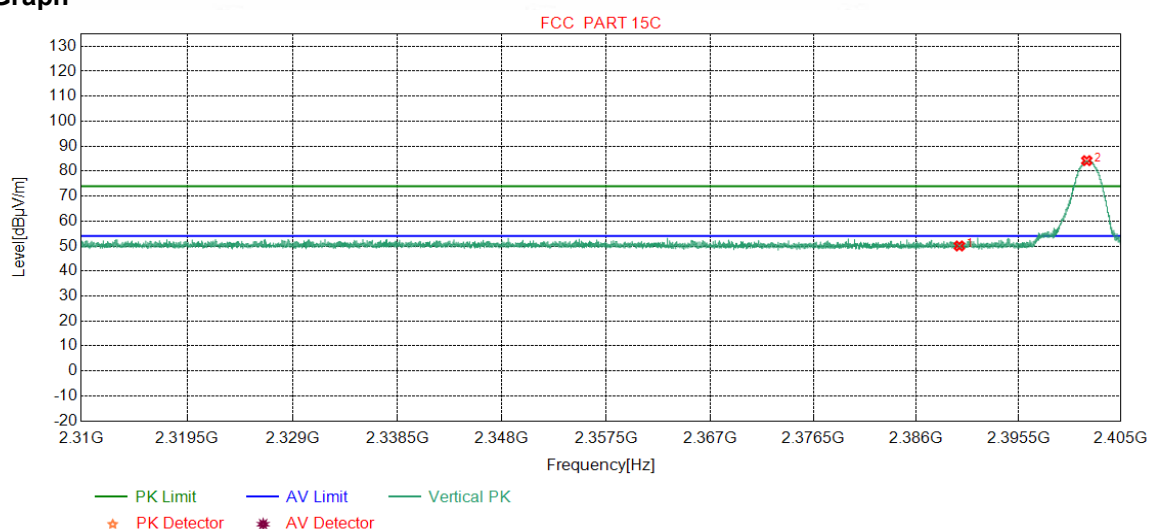

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.55	50.05	74.00	23.95	Pass	Vertical
2	2401.8331	32.26	13.31	-43.12	81.75	84.20	74.00	-10.20	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

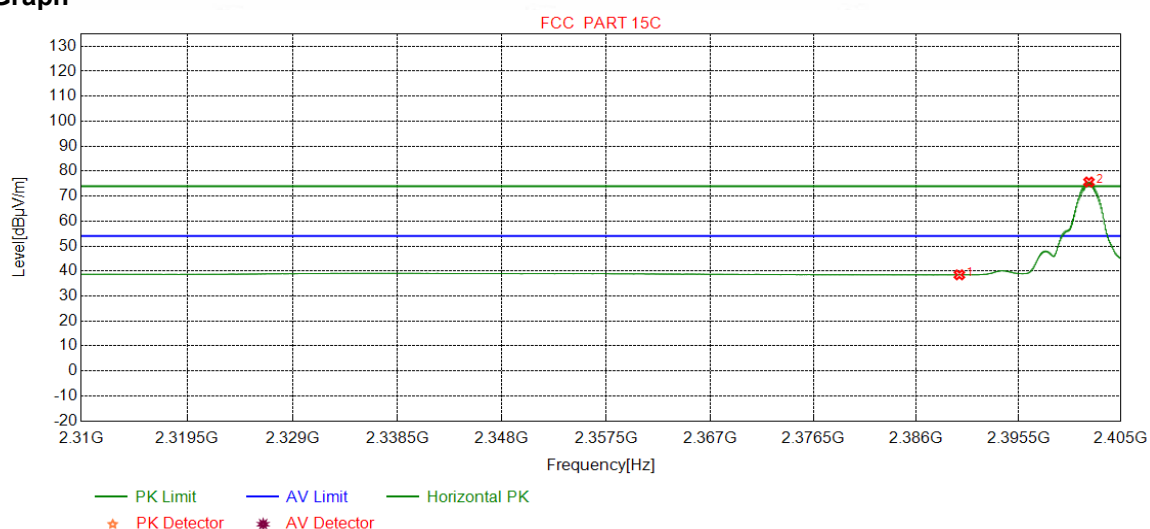

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	35.98	38.48	54.00	15.52	Pass	Horizontal
2	2402.0358	32.26	13.31	-43.12	73.21	75.66	54.00	-21.66	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

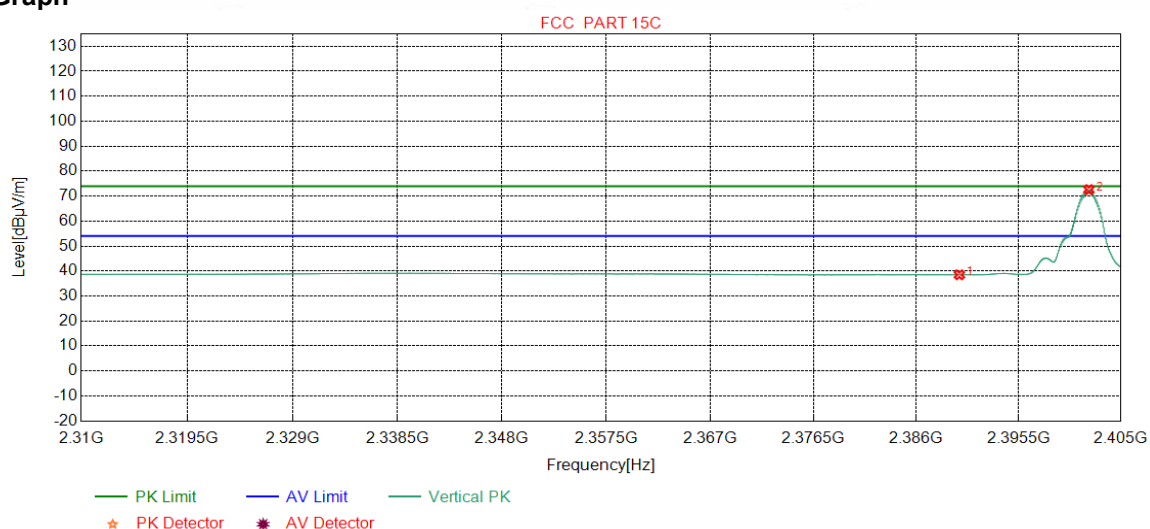

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.00	38.50	54.00	15.50	Pass	Vertical
2	2402.0358	32.26	13.31	-43.12	70.15	72.60	54.00	-18.60	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

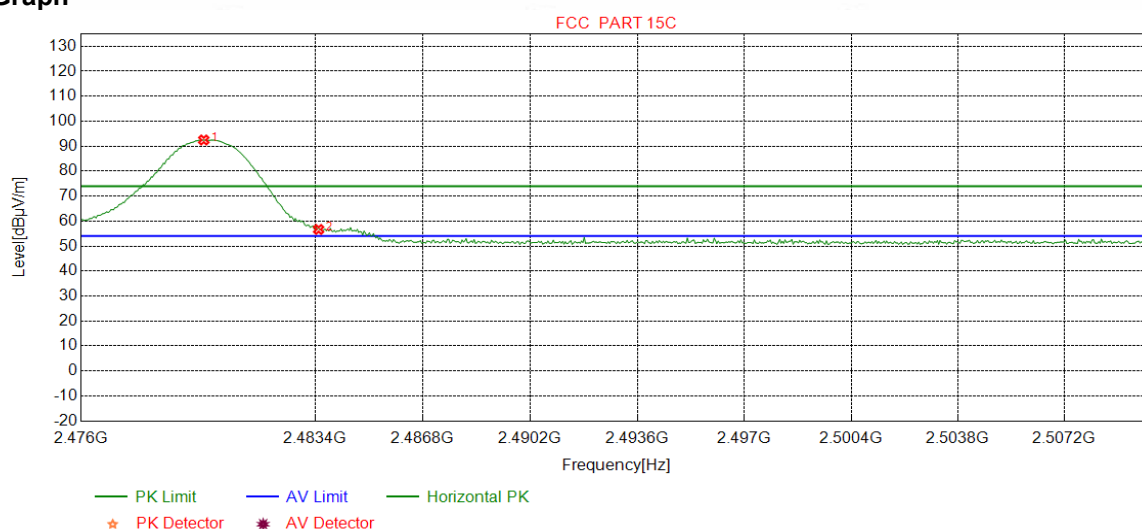

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8723	32.37	13.39	-43.10	89.81	92.47	74.00	-18.47	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	53.99	56.64	74.00	17.36	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

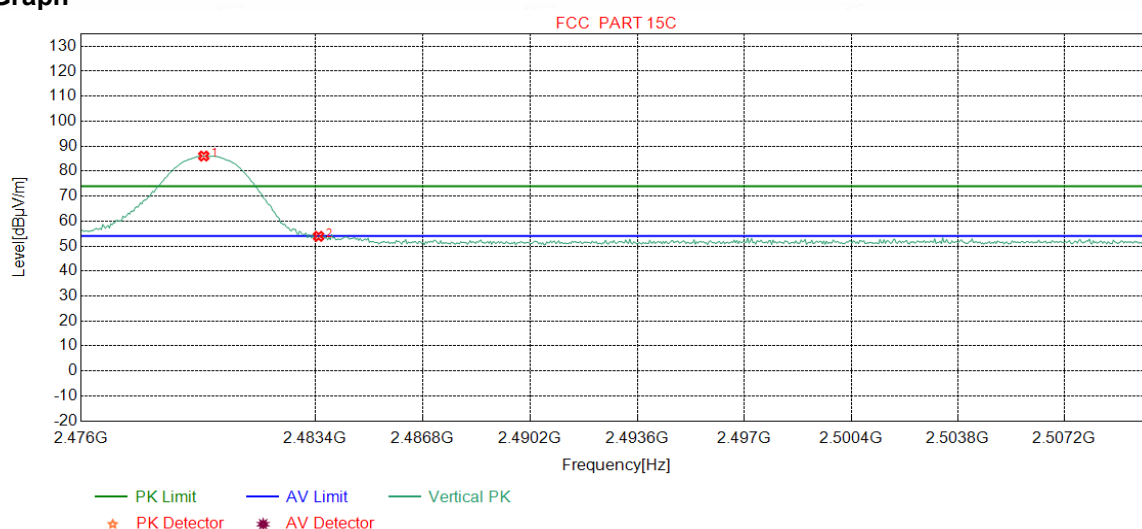

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8723	32.37	13.39	-43.10	83.38	86.04	74.00	-12.04	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	51.24	53.89	74.00	20.11	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

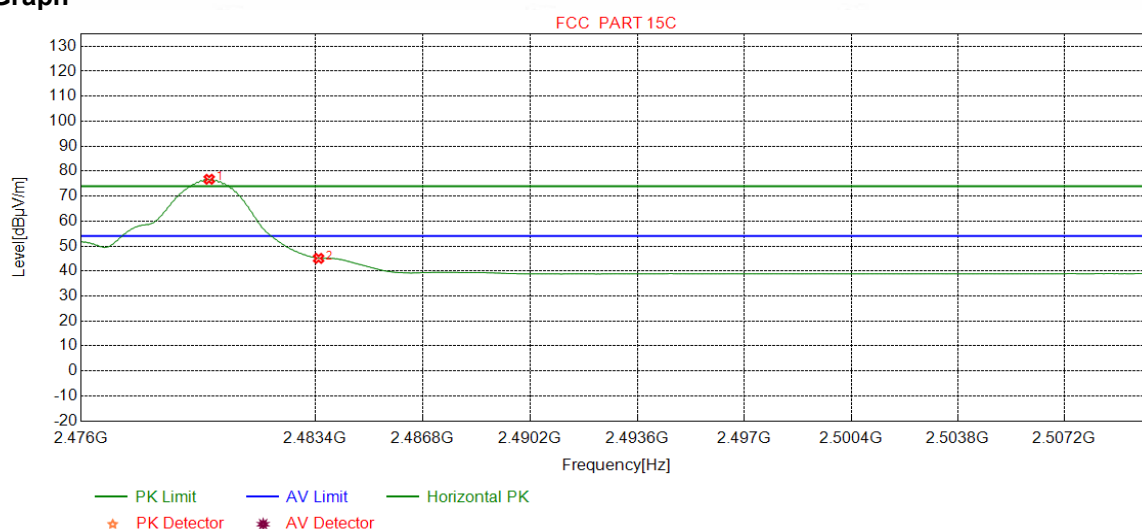

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	74.10	76.76	54.00	-22.76	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	42.42	45.07	54.00	8.93	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

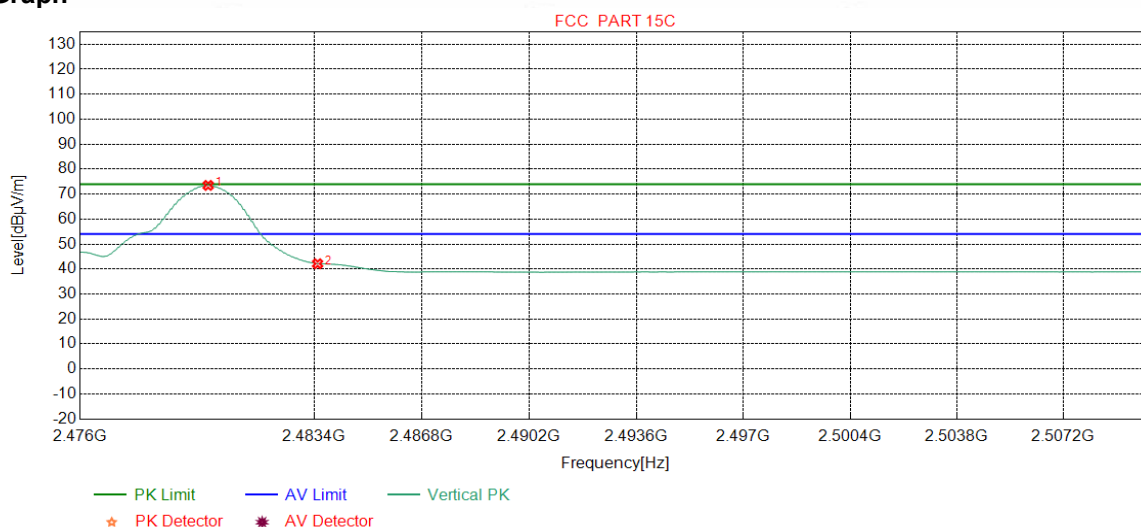

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	70.83	73.49	54.00	-19.49	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	39.47	42.12	54.00	11.88	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK and $\pi/4$ DQPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength	Limit	Remark	Measurement
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Result	Polarity	Remark
1	35.6266	10.90	0.66	-31.41	46.86	27.01	40.00	12.99	Pass	H	PK
2	77.5348	7.57	1.03	-31.94	53.52	30.18	40.00	9.82	Pass	H	PK
3	252.5403	12.25	1.89	-31.89	45.30	27.55	46.00	18.45	Pass	H	PK
4	384.9585	15.07	2.33	-31.85	49.08	34.63	46.00	11.37	Pass	H	PK
5	600.0290	19.00	2.96	-31.50	42.64	33.10	46.00	12.90	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	39.16	33.44	46.00	12.56	Pass	H	PK
7	36.0146	11.02	0.66	-31.39	43.56	23.85	40.00	16.15	Pass	V	PK
8	77.5348	7.57	1.03	-31.94	47.21	23.87	40.00	16.13	Pass	V	PK
9	204.4234	11.02	1.69	-31.92	45.70	26.49	43.50	17.01	Pass	V	PK
10	384.6675	15.06	2.33	-31.85	46.39	31.93	46.00	14.07	Pass	V	PK
11	481.0951	16.70	2.61	-31.90	46.47	33.88	46.00	12.12	Pass	V	PK
12	909.9750	22.16	3.60	-31.48	38.17	32.45	46.00	13.55	Pass	V	PK

Radiated Emission Above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1331.4331	28.23	2.79	-42.75	52.51	40.78	74.00	33.22	Pass	H	PK
2	3079.0053	33.23	4.77	-43.10	50.31	45.21	74.00	28.79	Pass	H	PK
3	4803.1202	34.50	4.55	-42.80	59.73	55.98	74.00	18.02	Pass	H	PK
4	4803.1202	34.50	4.55	-42.80	51.22	47.47	54.00	6.53	Pass	H	AV
5	7205.2804	36.31	5.82	-42.17	52.57	52.53	74.00	21.47	Pass	H	PK
6	9608.0000	37.64	6.63	-42.10	48.03	50.20	74.00	23.80	Pass	H	PK
7	12010.0000	39.31	7.60	-41.90	46.56	51.57	74.00	22.43	Pass	H	PK
8	1803.4803	30.40	3.32	-42.71	50.47	41.48	74.00	32.52	Pass	V	PK
9	3985.0657	33.79	4.33	-43.00	50.30	45.42	74.00	28.58	Pass	V	PK
10	4804.1203	34.50	4.55	-42.80	58.72	54.97	74.00	19.03	Pass	V	PK
11	4804.1203	34.50	4.55	-42.80	52.89	49.14	54.00	4.86	Pass	V	AV
12	7205.2804	36.31	5.82	-42.17	50.96	50.92	74.00	23.08	Pass	V	PK
13	9608.0000	37.64	6.63	-42.10	48.00	50.17	74.00	23.83	Pass	V	PK
14	12010.0000	39.31	7.60	-41.90	46.62	51.63	74.00	22.37	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2125.7126	31.88	3.62	-43.18	55.45	47.77	74.00	26.23	Pass	H	PK
2	3051.0034	33.22	4.83	-43.10	50.48	45.43	74.00	28.57	Pass	H	PK
3	4882.1255	34.50	4.81	-42.80	59.41	55.92	74.00	18.08	Pass	H	PK
4	4882.1255	34.50	4.81	-42.80	53.48	49.99	54.00	4.01	Pass	H	AV
5	7323.0000	36.42	5.85	-42.13	49.83	49.97	74.00	24.03	Pass	H	PK
6	9764.0000	37.71	6.71	-42.10	50.10	52.42	74.00	21.58	Pass	H	PK
7	12204.6136	39.42	7.67	-41.89	52.66	57.86	74.00	16.14	Pass	H	PK
8	12204.6136	39.42	7.67	-41.90	38.97	44.16	54.00	9.84	Pass	H	AV
9	2126.9127	31.88	3.62	-43.18	54.51	46.83	74.00	27.17	Pass	V	PK
10	3992.0661	33.79	4.33	-43.00	51.01	46.13	74.00	27.87	Pass	V	PK
11	4882.1255	34.50	4.81	-42.80	61.11	57.62	74.00	16.38	Pass	V	PK
12	4882.1255	34.50	4.81	-42.80	53.76	50.27	54.00	3.73	Pass	V	AV
13	7323.0000	36.42	5.85	-42.13	50.30	50.44	74.00	23.56	Pass	V	PK
14	9764.0000	37.71	6.71	-42.10	49.92	52.24	74.00	21.76	Pass	V	PK
15	12204.6136	39.42	7.67	-41.89	50.48	55.68	74.00	18.32	Pass	V	PK
16	12204.6136	39.42	7.67	-41.90	38.65	43.84	54.00	10.16	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1329.2329	28.23	2.79	-42.75	55.23	43.50	74.00	30.50	Pass	H	PK
2	2133.3133	31.89	3.63	-43.18	58.06	50.40	74.00	23.60	Pass	H	PK
3	4960.1307	34.50	4.82	-42.80	60.41	56.93	74.00	17.07	Pass	H	PK
4	4960.0527	34.50	4.82	-42.80	54.36	50.88	54.00	3.12	Pass	H	AV
5	7440.0000	36.54	5.85	-42.11	50.59	50.87	74.00	23.13	Pass	H	PK
6	9920.0000	37.77	6.79	-42.10	46.80	49.26	74.00	24.74	Pass	H	PK
7	12399.6266	39.54	7.86	-41.90	51.07	56.57	74.00	17.43	Pass	H	PK
8	12400.1116	39.54	7.86	-41.90	42.52	48.02	54.00	5.98	Pass	H	AV
9	2658.5659	32.65	4.10	-43.10	53.08	46.73	74.00	27.27	Pass	V	PK
10	3913.0609	33.73	4.34	-43.02	50.16	45.21	74.00	28.79	Pass	V	PK
11	4960.1307	34.50	4.82	-42.80	61.50	58.02	74.00	15.98	Pass	V	PK
12	4960.0367	34.50	4.82	-42.80	54.35	50.87	54.00	3.13	Pass	V	AV
13	7440.0000	36.54	5.85	-42.11	48.44	48.72	74.00	25.28	Pass	V	PK
14	9920.0000	37.77	6.79	-42.10	49.38	51.84	74.00	22.16	Pass	V	PK
15	12400.6267	39.54	7.86	-41.90	52.24	57.74	74.00	16.26	Pass	V	PK
16	12400.1357	39.54	7.86	-41.90	40.71	46.21	54.00	7.79	Pass	V	AV

Mode:			π/4DQPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1327.2327	28.23	2.79	-42.76	52.68	40.94	74.00	33.06	Pass	H	PK
2	2126.5127	31.88	3.62	-43.18	59.36	51.68	74.00	22.32	Pass	H	PK
3	4804.1203	34.50	4.55	-42.80	59.73	55.98	74.00	18.02	Pass	H	PK
4	4803.9873	34.50	4.55	-42.80	48.74	44.99	54.00	9.01	Pass	H	AV
5	7205.2804	36.31	5.82	-42.17	51.44	51.40	74.00	22.60	Pass	H	PK
6	9608.0000	37.64	6.63	-42.10	46.15	48.32	74.00	25.68	Pass	H	PK
7	12010.0000	39.31	7.60	-41.90	46.71	51.72	74.00	22.28	Pass	H	PK
8	2130.1130	31.88	3.62	-43.17	53.21	45.54	74.00	28.46	Pass	V	PK
9	3990.0660	33.79	4.33	-43.00	51.70	46.82	74.00	27.18	Pass	V	PK
10	4804.1203	34.50	4.55	-42.80	58.88	55.13	74.00	18.87	Pass	V	PK
11	4804.0183	34.50	4.55	-42.80	50.15	46.40	54.00	7.60	Pass	V	AV
12	7205.2804	36.31	5.82	-42.17	53.52	53.48	74.00	20.52	Pass	V	PK
13	9608.0000	37.64	6.63	-42.10	47.85	50.02	74.00	23.98	Pass	V	PK
14	12010.0000	39.31	7.60	-41.90	46.68	51.69	74.00	22.31	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/ m]	Limit [dB μ V/ m]	Margin [dB]	Result	Polarity	Remark
1	1727.4727	29.90	3.22	-42.68	50.90	41.34	74.00	32.66	Pass	H	PK
2	3090.0060	33.24	4.74	-43.10	50.69	45.57	74.00	28.43	Pass	H	PK
3	4881.1254	34.50	4.80	-42.80	59.21	55.71	74.00	18.29	Pass	H	PK
4	4881.6224	34.50	4.81	-42.80	50.27	46.78	54.00	7.22	Pass	H	AV
5	7323.0000	36.42	5.85	-42.13	49.84	49.98	74.00	24.02	Pass	H	PK
6	9764.0000	37.71	6.71	-42.10	48.45	50.77	74.00	23.23	Pass	H	PK
7	12203.6136	39.42	7.67	-41.89	50.51	55.71	74.00	18.29	Pass	H	PK
8	12204.1076	39.42	7.67	-41.90	37.35	42.54	54.00	11.46	Pass	H	AV
9	1410.6411	28.31	2.91	-42.72	51.11	39.61	74.00	34.39	Pass	V	PK
10	2654.9655	32.65	4.09	-43.10	53.03	46.67	74.00	27.33	Pass	V	PK
11	4882.1255	34.50	4.81	-42.80	61.10	57.61	74.00	16.39	Pass	V	PK
12	4882.0115	34.50	4.81	-42.80	51.27	47.78	54.00	6.22	Pass	V	AV
13	7324.2883	36.42	5.85	-42.13	50.25	50.39	74.00	23.61	Pass	V	PK
14	9763.4509	37.71	6.72	-42.11	50.50	52.82	74.00	21.18	Pass	V	PK
15	12204.6136	39.42	7.67	-41.89	50.36	55.56	74.00	18.44	Pass	V	PK
16	12204.4356	39.42	7.67	-41.90	35.86	41.05	54.00	12.95	Pass	V	AV

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/ m]	Limit [dB μ V/ m]	Margin [dB]	Result	Polarity	Remark
1	1331.0331	28.23	2.79	-42.75	51.92	40.19	74.00	33.81	Pass	H	PK
2	3326.0217	33.33	4.55	-43.10	50.14	44.92	74.00	29.08	Pass	H	PK
3	4960.1307	34.50	4.82	-42.80	60.34	56.86	74.00	17.14	Pass	H	PK
4	4960.0707	34.50	4.82	-42.80	51.40	47.92	54.00	6.08	Pass	H	AV
5	7439.2960	36.54	5.85	-42.11	50.44	50.72	74.00	23.28	Pass	H	PK
6	9920.0000	37.77	6.79	-42.10	46.97	49.43	74.00	24.57	Pass	H	PK
7	12399.6266	39.54	7.86	-41.90	54.20	59.70	74.00	14.30	Pass	H	PK
8	12400.1256	39.54	7.86	-41.90	40.82	46.32	54.00	7.68	Pass	H	AV
9	1683.2683	29.61	3.18	-42.70	50.99	41.08	74.00	32.92	Pass	V	PK
10	3992.0661	33.79	4.33	-43.00	53.83	48.95	74.00	25.05	Pass	V	PK
11	4959.1306	34.50	4.82	-42.80	61.56	58.08	74.00	15.92	Pass	V	PK
12	4959.6286	34.50	4.82	-42.80	51.06	47.58	54.00	6.42	Pass	V	AV
13	7440.0000	36.54	5.85	-42.11	48.28	48.56	74.00	25.44	Pass	V	PK
14	9920.0000	37.77	6.79	-42.10	48.16	50.62	74.00	23.38	Pass	V	PK
15	12398.6266	39.54	7.85	-41.90	51.44	56.93	74.00	17.07	Pass	V	PK
16	12399.1266	39.54	7.86	-41.90	36.29	41.79	54.00	12.21	Pass	V	AV

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.