

Product Name:Smart Phone	Report No: ITEZA2-202500034RF5
Product Model: Blade20 Turbo, Blade20 Max, Blade20 Play, Blade20 Pro Max, Blade20 Power, Blade20 Plus, Blade20 Energy, Blade20 Pro Energy, Blade20 Ultra Energy, Blade20 Max Energy, Blade20 Play Energy, Blade20 X	Security Classification: Open
Version: V1.0	Total Page:36

## TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
Aaron Long	Stone Tang	Joky Wang	

# FCC Radio Test Report

## FCC ID: 2AX4YBLADE20TURBO

**This report concerns:Original Grant**

Applicant:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Sample No:	1000055016
Product Name:	Smart Phone
Brand Name:	DOOGEE
Model No.:	Blade20 Turbo, Blade20 Max, Blade20 Play, Blade20 Pro Max, Blade20 Power, Blade20 Plus, Blade20 Energy, Blade20 Pro Energy, Blade20 Ultra Energy, Blade20 Max Energy, Blade20 Play Energy, Blade20 X
Test No.:	Blade20 Turbo

Date of Receipt:	2025/02/18
Date of Test:	2025/02/18~2025/03/19
Issued Date:	2025/03/26
Testing Lab:	TIRT

**Note:** This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen. Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

**Table of Contents**

	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 DUTY CYCLE	14
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	15
2.5 SUPPORT UNITS	15
<b>3 .AC POWER LINE CONDUCTED EMISSIONS</b>	<b>16</b>
3.1 LIMIT	16
3.2 TEST PROCEDURE	16
3.3 DEVIATIONFROMTESTSTANDARD	16
3.4 TESTSETUP	17
3.5 EUT OPERATION CONDITIONS	17
3.6 TEST RESULTS	17
<b>4 . RADIATED EMISSIONS</b>	<b>18</b>
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 DEVIATIONFROMTESTSTANDARD	20
4.4 TESTSETUP	20
4.5 EUT OPERATION CONDITIONS	21
4.6 TEST RESULTS - 9 KHZTO 30MHZ	21
4.7 TEST RESULTS - 30 MHZTO 1000 MHZ	21
4.8 TEST RESULTS - ABOVE1000 MHZ	21
<b>5 .BANDWIDTH</b>	<b>22</b>
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM STANDARD	22
5.4 TEST SETUP	23
5.5 EUT OPERATION CONDITIONS	23

<b>5.6 TEST RESULTS</b>	<b>23</b>
<b>6 .MAXIMUMOUTPUT POWER</b>	<b>24</b>
<b>6.1 LIMIT</b>	<b>24</b>
<b>6.2 TEST PROCEDURE</b>	<b>24</b>
<b>6.3 DEVIATION FROM STANDARD</b>	<b>24</b>
<b>6.4 TEST SETUP</b>	<b>24</b>
<b>6.5 EUT OPERATION CONDITIONS</b>	<b>24</b>
<b>6.6 TEST RESULTS</b>	<b>24</b>
<b>7 .POWER SPECTRAL DENSITY</b>	<b>25</b>
<b>7.1 LIMIT</b>	<b>25</b>
<b>7.2 TEST PROCEDURE</b>	<b>25</b>
<b>7.3 DEVIATION FROM STANDARD</b>	<b>25</b>
<b>7.4 TEST SETUP</b>	<b>26</b>
<b>7.5 EUT OPERATION CONDITIONS</b>	<b>26</b>
<b>7.6 TEST RESULTS</b>	<b>26</b>
<b>8 .FREQUENCY STABILITY</b>	<b>27</b>
<b>8.1 LIMIT</b>	<b>27</b>
<b>8.2 TEST PROCEDURE</b>	<b>27</b>
<b>8.3 DEVIATION FROM STANDARD</b>	<b>27</b>
<b>8.4 TEST SETUP</b>	<b>27</b>
<b>8.5 EUT OPERATION CONDITIONS</b>	<b>27</b>
<b>8.6 TEST RESULTS</b>	<b>27</b>
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>28</b>
<b>10 .EUT TEST PHOTOS</b>	<b>29</b>
<b>11 .EUT PHOTOS</b>	<b>29</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>30</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>32</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>33</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>35</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
ITEZA2-202500034RF5	V1.0	Original Report.	2025.03.26	Valid

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	RLAN attachments	PASS	-----
15.407(a)	MaximumOutput Power	RLAN attachments	PASS	-----
15.407(a)	Power Spectral Density	RLAN attachments	PASS	-----
15.407(g)	Frequency Stability	RLAN attachments	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
  - Outdoor access point device
  - Indoor access point device
  - Fixed point-to-point access points device
  - Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).
- (6) Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

## 1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

**1.3 TEST ENVIRONMENT CONDITIONS**

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 11V from adapter	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Bandwidth	25.0°C	56%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
MaximumOutput Power	24.9°C	54%	DC 3.87V from battery or DC 11V from adapte	Stone Tang
Power Spectral Density	25.1°C	62%	DC 3.87V from battery or DC 11V from adapter	Stone Tang

**Note: For the band edge and conducted spurious, only show the worst MIMO mode**

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	DOOGEE
Test Model	Blade20 Turbo
Series Model	Blade20 Turbo, Blade20 Max, Blade20 Play, Blade20 Pro Max, Blade20 Power, Blade20 Plus, Blade20 Energy, Blade20 Pro Energy, Blade20 Ultra Energy, Blade20 Max Energy, Blade20 Play Energy, Blade20 X
Model Difference(s)	There is no difference except the name of the model
Software Version	DOOGEE-Blade20 Turbo-EEA-Android15.0-20250221
Hardware Version	M1703-MUB-V2
Power Rating	DC 3.87V from battery or DC 11V from adapter
Operation Frequency Band(s)	UNII-1: 5180 MHz~5240 MHz UNII-3: 5745 MHz~5825MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Maximum Output Power _UNII-1	11ac80MIMO: 10.94dBm(0.012417W)
Maximum Output Power _UNII-3	11n40MIMO: 12.94dBm(0.019679W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

## 3. Antenna Specification:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	Shenzhen 3Good Wireless Communication Co.,LTD.	F1 plus	PIFA	N/A	-0.21
2	Shenzhen 3Good Wireless Communication Co.,LTD.	F1 plus	PIFA	N/A	-0.21

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing and fixation purposes
- 3) The device supports WLAN MIMO CDD mode

## 4. Antenna Gain

&lt;CDD Modes &gt;

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F2)f)i).

For PSD, the directional gain calculation is following F2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

Mode	ANT1(dBi)	ANT2(dBi)	DG for Power (dBi)	DG for PSD(dBi)	Power Limit Reduction (dBi)	PSD Limit Reduction (dBi)
5GWIFI	-0.21	-0.21	-0.21	2.80	0	0

*Power Limit Reduction = DG(Power) – 6dB<sub>i</sub>, ( min = 0 )**PSD Limit Reduction = DG(PSD) – 6dB<sub>i</sub>, ( min = 0 )*

## 2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 2	TX N20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 3	TX N40 Mode Channel 38/46 (UNII-1) SISO/MIMO
Mode 4	TX AC20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 5	TX AC40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 6	TX AC80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 7	TX A Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 12	TX AC80 Mode Channel 155 (UNII-3) SISO/MIMO

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO

<b>Radiated Emissions Test - Below 1GHz</b>	
Final Test Mode	Description
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO

<b>Radiated Emissions Test - Above 1GHz</b>	
Final Test Mode	Description
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 6	TX AC80 Mode Channel 42 (UNII-1) SISO/MIMO

Final conducted RF Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 2	TX N20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 3	TX N40 Mode Channel 38/46 (UNII-1) SISO/MIMO
Mode 4	TX AC20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 5	TX AC40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 6	TX AC80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 7	TX A Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 12	TX AC80 Mode Channel 155 (UNII-3) SISO/MIMO

**Note:**

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N40 Mode Channel 159 (UNII-3) MIMO is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.

**2.3DUTY CYCLE**

If duty cycle is  $\geq 98\%$ , duty factor is not required.

If duty cycle is  $< 98\%$ , duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

Please refer to the RLAN attachments

**NOTE:**

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

For IEEE 802.11ac20:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

For IEEE 802.11ac40

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

For IEEE 802.11ac80

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set  $VBW > 1/T$ , Trefers to the minimum transmission duration over which the transmitter is on and is transmitting at its Maximumpower control level for the tested mode of operation.

**2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED****2.5 SUPPORT UNITS**

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

### 3.AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TESTSETUP

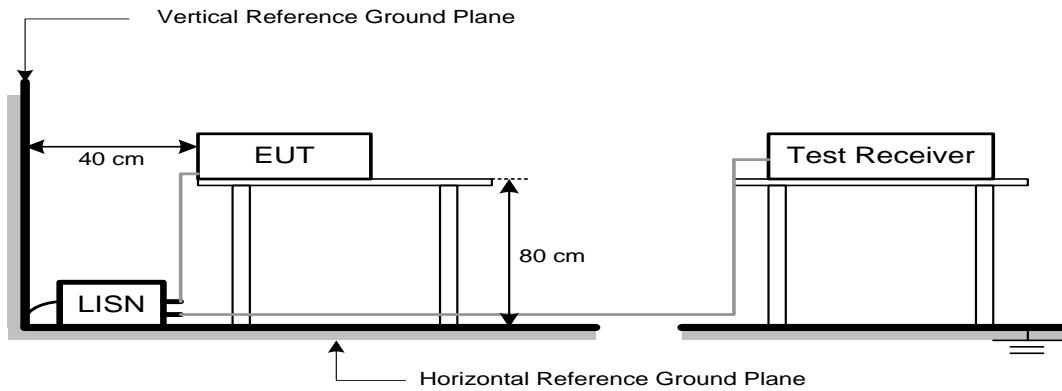

The LISN edge is arranged parallel to the edge of the test table  
The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT and LISN

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB $\mu$ V/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
	-27	68.2
5725-5850	10	105.2
NOTE (2)	15.6	110.8
	27	122.2

#### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

## 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the Maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with Maximumhold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)

h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)

i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~40GHz for PK/AVG detector

#### 4.3 DEVIATION FROM TEST STANDARD


No deviation.


#### 4.4 TEST SETUP

**9 kHz to 30 MHz**

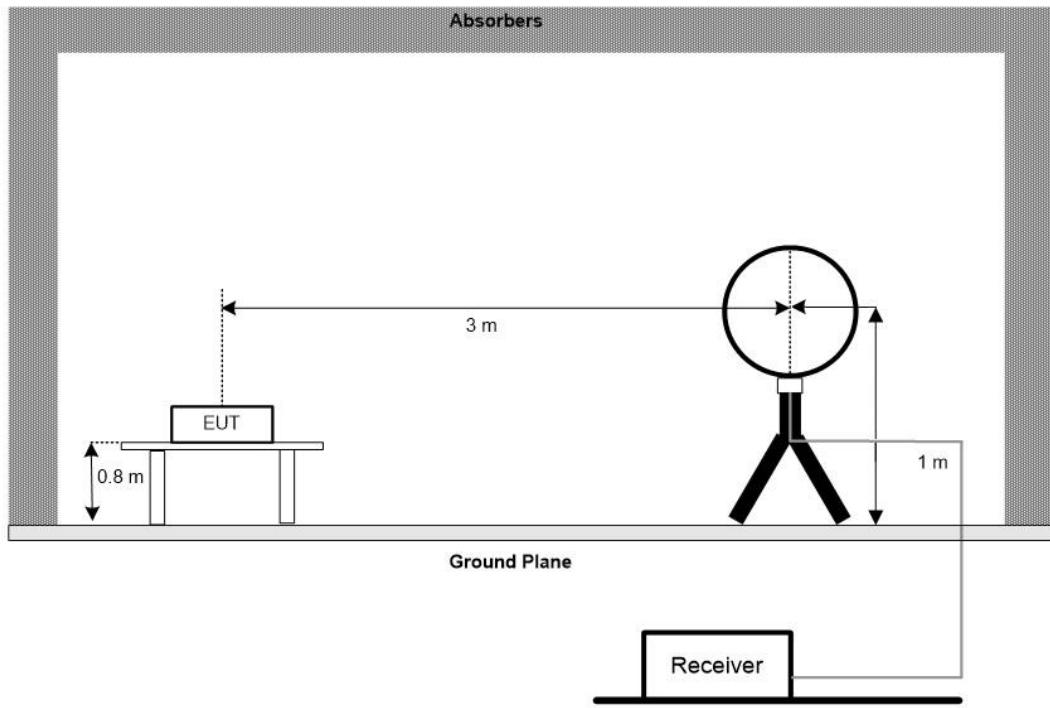

**30 MHz to 1 GHz**

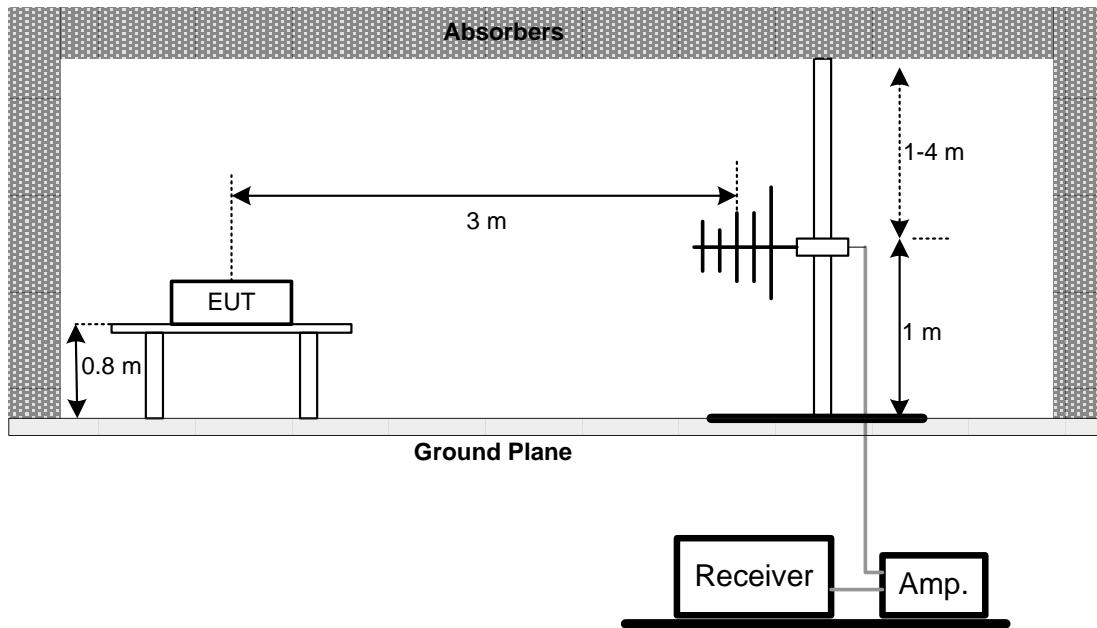

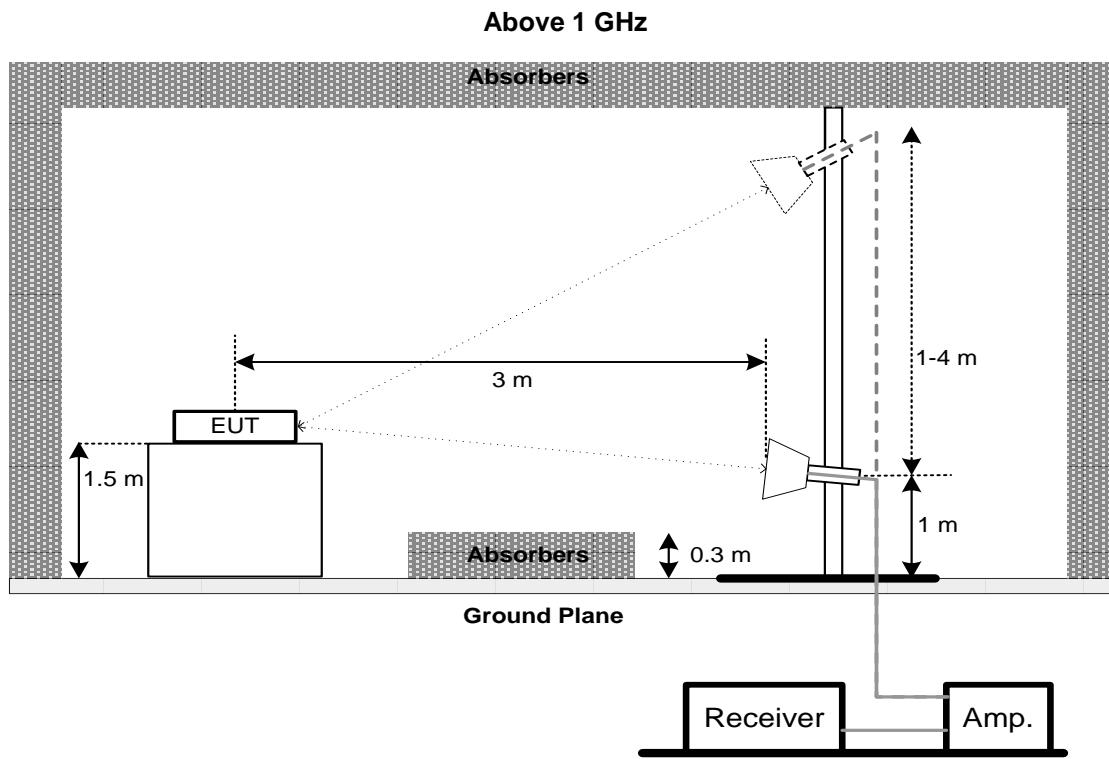

#### 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.6 TEST RESULTS - 9 KHZTO 30MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.7 TEST RESULTS - 30 MHZTO 1000 MHZ

Please refer to the APPENDIX C.

#### 4.8 TEST RESULTS - ABOVE1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5.BANDWIDTH

### 5.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6dB Bandwidth	Minimum 500 kHz	5725-5850

### 5.2TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

For UNII-1:

Spectrum Parameter	Setting
Span Frequency	> 26dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	MAX Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6dB Bandwidth
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	MAX Hold
Sweep Time	Auto


For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	MAX Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26dB / 6dB below carrier.

### 5.3DEVIATION FROM STANDARD

No deviation.

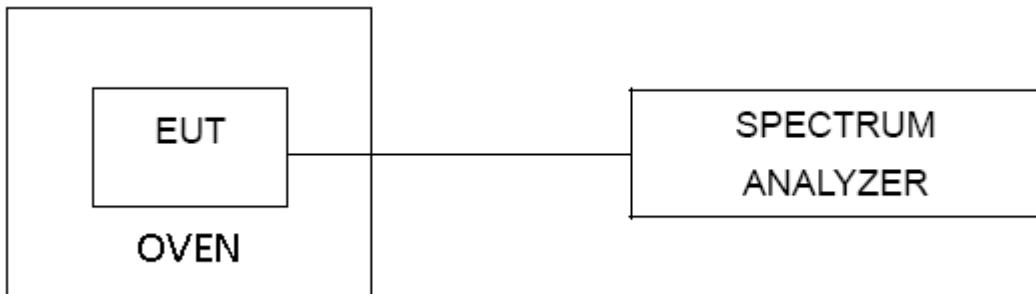**5.4 TEST SETUP****5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS**

Pass

Please refer to the RLAN attachments

## 6.MAXIMUMOUTPUT POWER

### 6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	MAXimumOutput Power	AP device:1 Watt (30dBm)	5150-5250
		Client device: 250mW (23.98dBm)	
		250mW (23.98dBm)	5250-5350
		250mW (23.98dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For client devices in the 5.15-5.25 GHz band, the Maximumconducted output power over the frequency band of operation shall not exceed 250 mW provided the Maximumantenna gain does not exceed 6 dBi. In addition, the Maximumpower spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the Maximumconducted output power and the Maximumpower spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the Maximumconducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.


### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

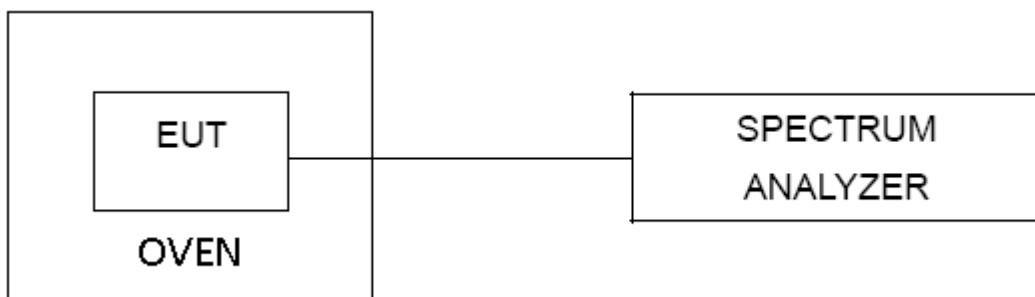

### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Pass

Please refer to the RLAN attachments

## 7. POWER SPECTRAL DENSITY

### 7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device:17dBm/MHz	5150-5250
		Client device:11dBm/MHz	
		11dBm/MHz	5250-5350
		11dBm/MHz	5470-5725
		30dBm/500kHz	5725-5850

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:  
For UNII-1


Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz.
VBW	3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	500KHz.
VBW	2MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

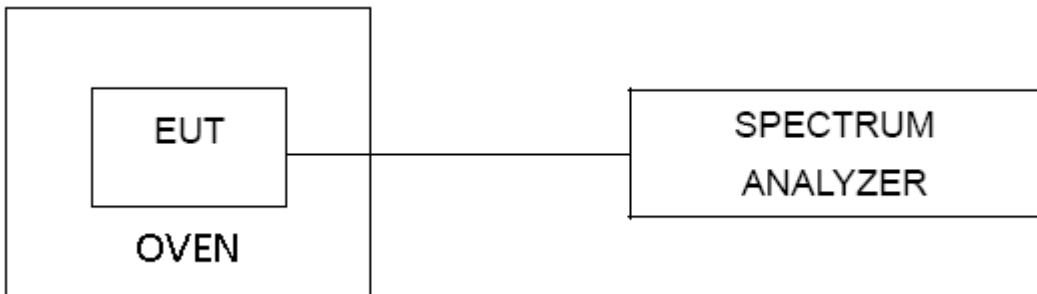**7.4 TEST SETUP****7.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**7.6 TEST RESULTS**

Pass

Please refer to the RLAN attachments

## 8.FREQUENCY STABILITY

### 8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

### 8.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissionsbandwidth
RBW	10 kHz
VBW	10kHz
Detector	Peak
Trace	MAX Hold
Sweep Time	Auto
- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is-10°C~40°C.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

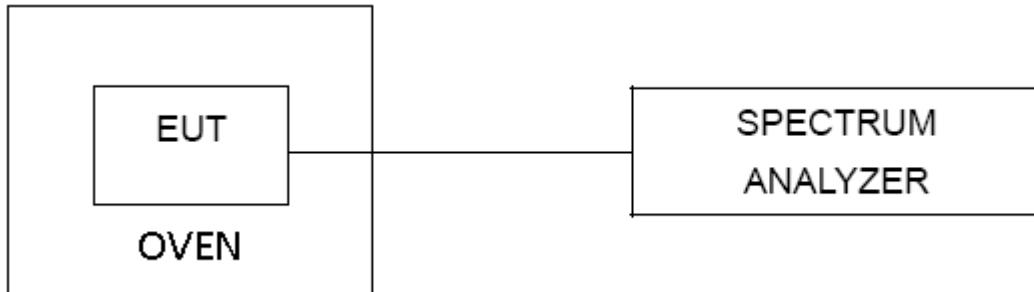

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Pass

Please refer to the RLAN attachments

**9. MEASUREMENT INSTRUMENTS LIST**

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-9 66-20220911	2025/01/05	2026/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2023/12/11	2025/12/10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2023/12/11	2025/12/10
Preamplifier	Emtrace	RP01A	'02017	2025/01/05	2026/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2025/01/05	2026/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2025/01/05	2026/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2025/01/05	2026/01/04
RF Cable	/	LMR400UF-NMNM -7.0M	/	2025/01/05	2026/01/04
RF Cable	/	SFT2050PUR-NMN M-7.0M	/	2025/01/05	2026/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-1 02611-mk	2024/11/02	2025/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102 915-Bp	2024/11/02	2025/11/01
RF Cable	\	SFT2050PUR-NMN M-2.0M	\	2025/01/05	2026/01/04
Spectrum analyzer	ROHDE&SCHWA RZ	FSU26	200732	2025/01/05	2026/01/04
Spectrum analyzer	ROHDE&SCHWA RZ	FSV40-N	101722	2025/01/05	2026/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2025/01/05	2026/01/04

**10.EUT TEST PHOTOS**


Please reference to the appendix I Test Setup Photo for details.

**11.EUT PHOTOS**

Please reference to the appendix II external photos and appendix III internal photos for details.

## APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS


Test Mode	TX N40 Mode Channel 159 (UNII-3) MIMO	Phase	Line
-----------	---------------------------------------	-------	------

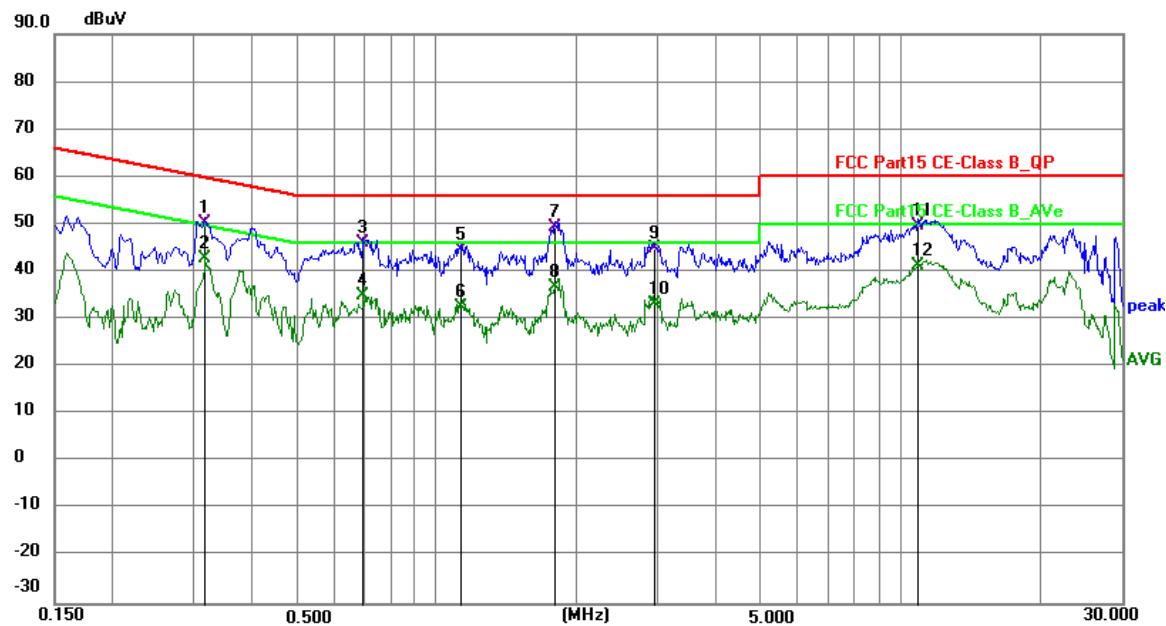

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3165	40.51	9.63	50.14	59.80	-9.66	QP	P	
2	0.3165	33.10	9.63	42.73	49.80	-7.07	AVG	P	
3	0.6945	36.44	9.63	46.07	56.00	-9.93	QP	P	
4	0.6945	25.33	9.63	34.96	46.00	-11.04	AVG	P	
5	1.1265	34.92	9.64	44.56	56.00	-11.44	QP	P	
6	1.1265	22.77	9.64	32.41	46.00	-13.59	AVG	P	
7 *	1.7970	39.58	9.65	49.23	56.00	-6.77	QP	P	
8	1.7970	27.05	9.65	36.70	46.00	-9.30	AVG	P	
9	2.9580	35.24	9.65	44.89	56.00	-11.11	QP	P	
10	2.9580	23.64	9.65	33.29	46.00	-12.71	AVG	P	
11	10.8600	40.04	9.72	49.76	60.00	-10.24	QP	P	
12	10.8600	31.58	9.72	41.30	50.00	-8.70	AVG	P	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

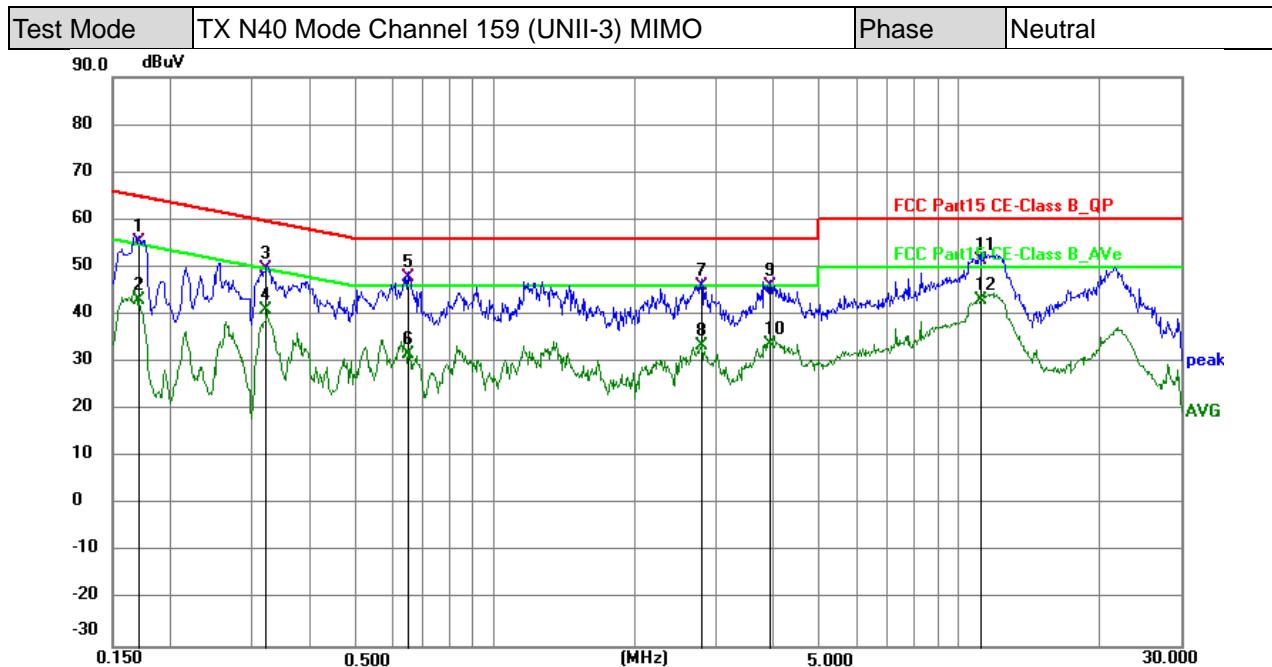

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1712	45.65	9.62	55.27	64.90	-9.63	QP	P	
2	0.1712	33.50	9.62	43.12	54.90	-11.78	AVG	P	
3	0.3209	40.03	9.62	49.65	59.68	-10.03	QP	P	
4	0.3209	31.26	9.62	40.88	49.68	-8.80	AVG	P	
5	0.6495	38.24	9.62	47.86	56.00	-8.14	QP	P	
6	0.6495	22.11	9.62	31.73	46.00	-14.27	AVG	P	
7	2.7915	36.53	9.65	46.18	56.00	-9.82	QP	P	
8	2.7915	23.67	9.65	33.32	46.00	-12.68	AVG	P	
9	3.9075	36.24	9.67	45.91	56.00	-10.09	QP	P	
10	3.9075	23.95	9.67	33.62	46.00	-12.38	AVG	P	
11	11.1210	41.75	9.73	51.48	60.00	-8.52	QP	P	
12 *	11.1210	33.34	9.73	43.07	50.00	-6.93	AVG	P	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.


## APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

**APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**


Test Mode	TX N40 Mode Channel 159 (UNII-3) MIMO	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

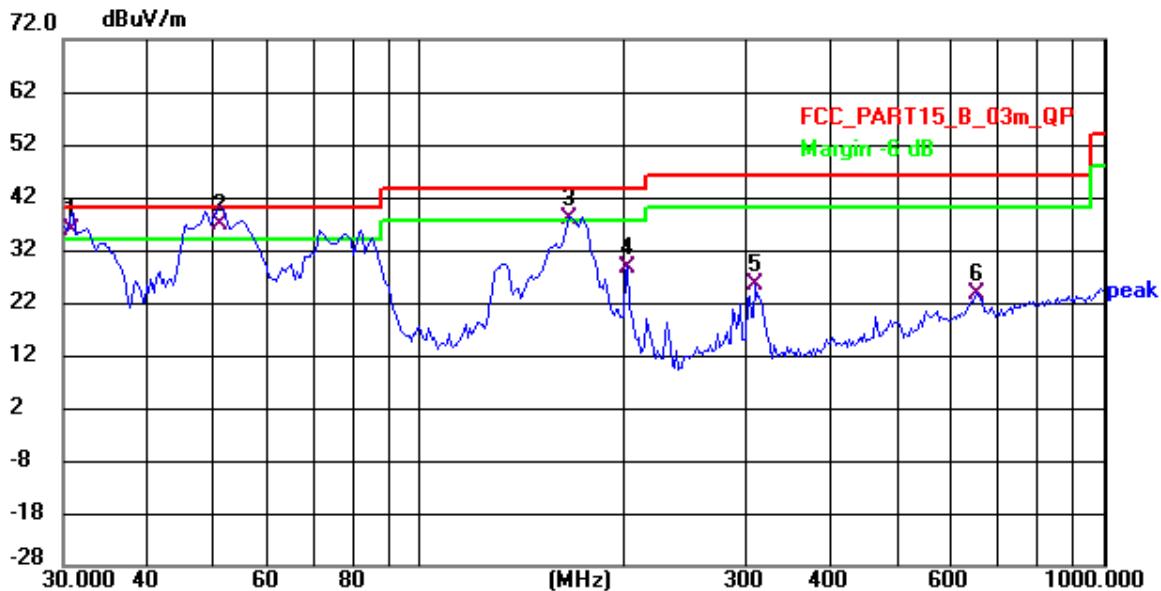

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	30.916	59.08	-23.31	35.77	40.00	-4.23	QP	200	352	P	
2 *	50.842	59.01	-22.09	36.92	40.00	-3.08	QP	100	99	P	
3 !	165.472	58.81	-20.88	37.93	43.50	-5.57	QP	100	7	P	
4	201.454	53.43	-24.74	28.69	43.50	-14.81	QP	100	210	P	
5	309.271	47.13	-21.78	25.35	46.00	-20.65	QP	200	261	P	
6	651.383	36.25	-12.71	23.54	46.00	-22.46	QP	200	183	P	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

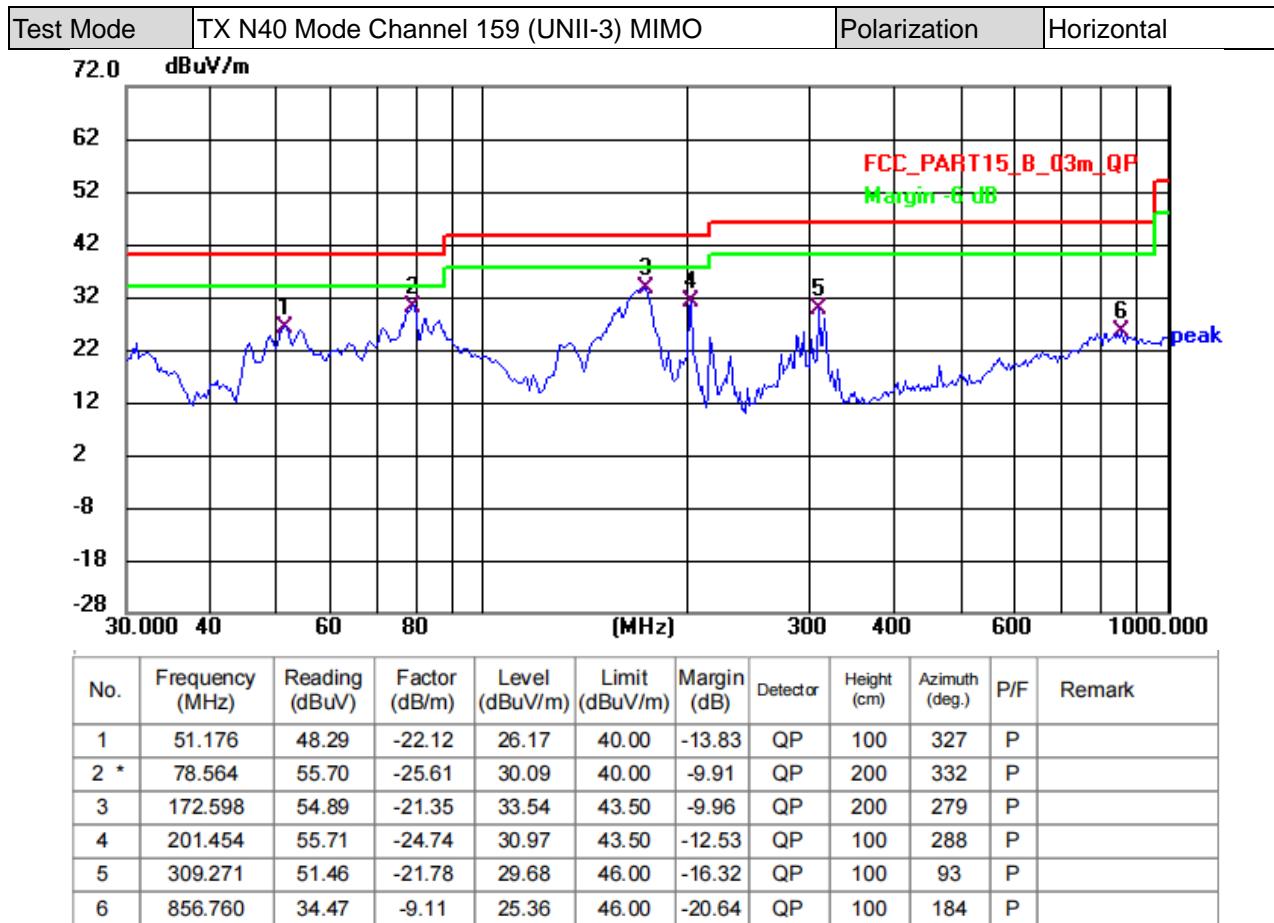

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Note: All the modes have been tested and recorded worst mode in the report.

UNII-1

### TX AC20 MIMO Channel 36 / 5180 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10652	H	44.10	---	9.15	53.25	---	74	54	-20.75
15525	H	42.70	---	10.25	52.95	---	74	54	-21.05
---	H	---	---	---	---	---	---	---	---
10652	V	42.84	---	9.99	52.83	---	74	54	-21.17
15542	V	42.72	---	10.95	53.67	---	74	54	-20.33
---	V	---	---	---	---	---	---	---	---

### TX AC20 MIMO Channel 40 / 5200 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10669	H	40.76	---	10.01	50.77	---	74	54	-23.23
15601	H	41.54	---	10.79	52.33	---	74	54	-21.67
---	H	---	---	---	---	---	---	---	---
10668	V	43.64	---	10.05	53.69	---	74	54	-20.31
15601	V	40.66	---	11.93	52.59	---	74	54	-21.41
---	V	---	---	---	---	---	---	---	---

### TX AC20 MIMO Channel 48 / 5240 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10760	H	43.89	---	10.00	53.89	---	74	54	-20.11
15725	H	40.40	---	12.04	52.44	---	74	54	-21.56
---	H	---	---	---	---	---	---	---	---
10759	V	42.73	---	10.12	52.85	---	74	54	-21.15
15725	V	41.62	---	11.32	52.94	---	74	54	-21.06
---	V	---	---	---	---	---	---	---	---

UNII-3

### TX AC20 MIMO Channel 149 / 5745 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11727	H	43.87	---	9.81	53.68	---	74	54	-20.32
17739	H	40.30	---	12.96	53.26	---	74	54	-20.74
---	H	---	---	---	---	---	---	---	---
11726	V	42.59	---	9.81	52.40	---	74	54	-21.60
17738	V	40.39	---	12.95	53.34	---	74	54	-20.66
---	V	---	---	---	---	---	---	---	---

### TX AC20 MIMO Channel 153 / 5765 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11837	H	44.00	---	9.91	53.91	---	74	54	-20.09
18126	H	39.45	---	13.21	52.66	---	74	54	-21.34
---	H	---	---	---	---	---	---	---	---
11849	V	43.82	---	9.92	53.74	---	74	54	-20.26
18356	V	40.49	---	13.22	53.71	---	74	54	-20.29
---	V	---	---	---	---	---	---	---	---

### TX AC20 MIMO Channel 165 / 5825 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11906	H	43.84	---	10.01	53.85	---	74	54	-20.15
18254	H	38.95	---	14.01	52.96	---	74	54	-21.04
---	H	---	---	---	---	---	---	---	---
11932	V	42.94	---	9.98	52.92	---	74	54	-21.08
18298	V	39.39	---	13.99	53.38	---	74	54	-20.62
---	V	---	---	---	---	---	---	---	---

**Notes:**

- 1). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 40GHz (which is less) were made with an instrument using Peak detector mode.
- 2). Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit

**End of Test Report**