

FCC SAR REPORT

Report No.: JYTSZ-R14-2500096

Applicant: Shenzhen DOOGEE Hengtong Technology CO.,LTD

Address of Applicant: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China

Equipment Under Test (EUT)

Product Name: Smart Phone

Model No.: Fire 7 Pro, Fire 7 Ultra, Fire 7 Max, Fire 7 Power, Fire 5 Pro, Fire 5 Ultra, Fire 5 Max, Fire 6 Ultra, Fire 7 Play, Fire 5 Power

Trade mark: DOOGEE

FCC ID: 2AX4YFIRE7

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 31 May., 2025 ~ 09 Jun., 2025

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 1.042 Body: 0.908 Hotspot: 1.021

Project by: _____

Date: 01 Jul., 2025


Reviewed by: _____

Date: 01 Jul., 2025

Approved by: _____

Date: 01 Jul., 2025

Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	01 Jul., 2025	Original

3 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY.....	5
5	GENERAL INFORMATION.....	7
5.1	CLIENT INFORMATION.....	7
5.2	GENERAL DESCRIPTION OF EUT	7
5.3	MAXIMUM RF OUTPUT POWER.....	9
5.4	ENVIRONMENT OF TEST SITE	11
5.5	TEST SAMPLE PLAN	11
5.6	TEST LOCATION	11
6	INTRODUCTION.....	12
6.1	INTRODUCTION	12
6.2	SAR DEFINITION	12
7	RF EXPOSURE LIMITS	13
7.1	UNCONTROLLED ENVIRONMENT.....	13
7.2	CONTROLLED ENVIRONMENT	13
7.3	RF EXPOSURE LIMITS	13
8	SAR MEASUREMENT SYSTEM.....	14
8.1	E-FIELD PROBE.....	15
8.2	ROBOT	16
8.3	PHANTOM.....	17
8.4	DEVICE HOLDER.....	17
8.5	TEST EQUIPMENT LIST	18
9	TISSUE SIMULATING LIQUIDS	19
10	SAR SYSTEM VERIFICATION.....	21
11	EUT TESTING POSITION.....	23
11.1	HANDSET REFERENCE POINTS	23
11.2	POSITIONING FOR CHEEK / TOUCH	24
11.3	POSITIONING FOR EAR / 15o TILT.....	24
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	25
11.5	BODY WORN ACCESSORY CONFIGURATIONS	25
11.6	WIRELESS ROUTER (HOTSPOT) CONFIGURATIONS	26
12	MEASUREMENT PROCEDURES	27
12.1	SPATIAL PEAK SAR EVALUATION	27
12.2	POWER REFERENCE MEASUREMENT.....	28
12.3	AREA & ZOOM SCAN PROCEDURES.....	28
12.4	VOLUME SCAN PROCEDURES	29
12.5	SAR AVERAGED METHODS	29
12.6	POWER DRIFT MONITORING	29
13	CONDUCTED RF OUTPUT POWER.....	30
13.1	GSM CONDUCTED POWER	30
13.2	WCDMA CONDUCTED POWER	32
13.3	LTE CONDUCTED POWER	35
13.4	WLAN 2.4 GHz BAND CONDUCTED POWER	63
13.5	WLAN 5.2GHz BAND CONDUCTED POWER.....	64
13.6	WLAN 5.8GHz BAND CONDUCTED POWER.....	65
13.7	BLUETOOTH CONDUCTED POWER	66
13.8	NFC CONDUCTED POWER	67
14	EXPOSURE POSITIONS CONSIDERATION	68
14.1	EUT ANTENNA LOCATIONS.....	68
14.2	TEST POSITIONS CONSIDERATION	69
15	SAR TEST RESULTS SUMMARY	70
15.1	STANDALONE HEAD SAR DATA.....	70

15.2	STANDALONE BODY SAR	74
15.3	BODY SAR IN HOTSPOT MODE	77
15.4	REPEATED SAR MEASUREMENT	81
15.5	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS	82
15.6	SAR SIMULTANEOUS TRANSMISSION ANALYSIS	83
15.7	MEASUREMENT UNCERTAINTY	84
16	REFERENCE	85
APPENDIX A: PLOTS OF SAR SYSTEM CHECK		86
APPENDIX B: PLOTS OF SAR TEST DATA		94

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as below:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.051	PCE	1.042
	GSM 1900	0.015		
	WCDMA Band II	0.045		
	WCDMA Band IV	0.047		
	WCDMA Band V	0.086		
	LTE Band 7	0.102		
	LTE Band 25 & LTE Band 2	0.044		
	LTE Band 26 & LTE Band 5	0.087		
	LTE Band 41 & LTE Band 38	1.042		
	LTE Band 66 & LTE Band 4	0.046		
	WLAN 2.4 GHz	0.027	DTS	
	WLAN 5.2 GHz	0.236	NII	
	WLAN 5.8 GHz	0.553		
Body (10 mm Gap)	GSM 850	0.118	PCE	0.908
	GSM 1900	0.318		
	WCDMA Band II	0.413		
	WCDMA Band IV	0.261		
	WCDMA Band V	0.067		
	LTE Band 7	0.520		
	LTE Band 25 & LTE Band 2	0.609		
	LTE Band 26 & LTE Band 5	0.080		
	LTE Band 41 & LTE Band 38	0.908		
	LTE Band 66 & LTE Band 4	0.334		
	WLAN 2.4GHz	0.013	DTS	
	WLAN 5.2 GHz	0.067	NII	
	WLAN 5.8 GHz	0.189		
Hotspot (10 mm Gap)	GSM 850	0.118	PCE	1.021
	GSM 1900	0.318		
	WCDMA Band II	0.433		
	WCDMA Band IV	0.376		
	WCDMA Band V	0.067		
	LTE Band 7	0.520		
	LTE Band 25 & LTE Band 2	0.609		
	LTE Band 26 & LTE Band 5	0.080		
	LTE Band 41 & LTE Band 38	1.021		
	LTE Band 66 & LTE Band 4	0.383		
	WLAN 2.4 GHz	0.016	DTS	

	WLAN 5.2 GHz	0.067	NII	
	WLAN 5.8 GHz	0.189		

< Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Back	LTE Band 41	1.042	PCE	1.595
	WLAN 5.8 GHz	0.553	NII	
	NFC	0.000	DXX	

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528: 2013.
3. For FDD-LTE Band 2 is full covered by FDD-LTE Band 25, so only FDD-LTE Band 25 was tested.
4. For FDD-LTE Band 4 is full covered by FDD-LTE Band 66, so only FDD-LTE Band 66 was tested.
5. For FDD-LTE Band 5 is full covered by FDD-LTE Band 26, so only FDD-LTE Band 26 was tested.
6. For TDD-LTE Band 38 is full covered by TDD-LTE Band 41, so only TDD-LTE Band 41 was tested.

5 General Information

5.1 Client Information

Applicant:	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address of Applicant:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address of Manufacturer:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China
Factory	Shenzhen DOOGEE Hengtong Technology CO., LTD
Address of Factory:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong China

5.2 General Description of EUT

Product Name:	Smart Phone				
Model No.:	Fire 7, Fire 7 Pro, Fire 7 Ultra, Fire 7 Max, Fire 7 Power, Fire 5 Pro, Fire 5 Ultra, Fire 5 Max, Fire 6 Ultra, Fire 7 Play, Fire 5 Power				
Category of device	Portable device				
Operation Frequency:	GSM:	GSM850: 824.2~848.8 MHz		PCS 1900: 1850.2~1909.8 MHz	
	WCDMA:	Band II: 1852.4~1907.6 MHz		Band V: 826.4~846.6 MHz	
		Band IV: 1712.4~1752.6 MHz			
	LTE:	Band 2:1850MHz~1910MHz		Band 4:1710MHz~1755MHz	
		Band 5:824MHz~849MHz		Band 7: 2500MHz~2570MHz	
		Band 25 : 1850MHz-1915MHz		Band 26:814MHz~849MHz	
		Band 38: 2570MHz~2620MHz		Band 41: 2535MHz~2655MHz	
		Band 66:1710MHz~1780MHz			
	Wi-Fi:	2412MHz~2462MHz		5150MHz-5250MHz	
		5725MHz-5850MHz			
	Bluetooth: 2402 MHz ~ 2480 MHz				
	NFC: 13.56MHz				
Modulation technology:	GSM:	☒ Voice(GMSK)	☒ GPRS(GMSK)	☒ EGPRS(GMSK, 8PSK)	
	WCDMA:	☒ RMC(QPSK)	☒ HSUPA(QPSK)	☒ HSDPA(QPSK,16QAM)	
	LTE:	☒ QPSK	☒ 16QAM	☒ 64QAM	
	Wi-Fi:	☒ 802.11b(DSSS)		☒ 802.11a/g/n/ac (OFDM)	
	Bluetooth:	☒ BDR(GFSK)	☒ EDR($\pi/4$ -DQPSK, 8DPSK)		☒ LE(GFSK)
	NFC:	ASK			
Antenna Type:	Internal Antenna				
Antenna Gain:	GSM 850: -4.83 dBi; PCS 1900: -1.45dBi WCDMA Band II: -1.45dBi; WCDMA Band V: -4.83dBi WCDMA Band IV: -0.17dBi LTE Band 2: -1.45dBi; LTE Band 4: -0.17dBi LTE Band 5: -4.83dBi; LTE Band 7: 0.28dBi				

	LTE Band 25: -0.17dBi; LTE Band 26: -4.83dBi LTE Band 38: 0.28dBi; LTE Band 41: 0.45dBi LTE Band 66: -0.17dBi Bluetooth: 0.9dBi; 2.4G Wi-Fi: 0.94dBi; 5G Wi-Fi: 2.8dBi	
(E)GPRS Class:	(E)GPRS Class: 12	
Dimensions (L*W*H):	177 mm (L)× 85 mm (W)× 19 mm (H)	
Accessories information:	Adapter: Model: HJ-PD18W-US Input: AC100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 3.0A 15.0W OR 9.0V, 2.0A 18.0W OR 12.0V, 1.5A 18.0W MAX	Battery: Rechargeable Li-ion Battery DC3.87V, 13000mAh
		Headset: Support headset (shipped without)
Remark:	Fire 7, Fire 7 Pro, Fire 7 Ultra, Fire 7 Max, Fire 7 Power, Fire 5 Pro, Fire 5 Ultra, Fire 5 Max, Fire 6 Ultra, Fire 7 Play, Fire 5 Power were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.	

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	PCS 1900
GSM (Voice)	33.44	29.71
GPRS (1 TX Slot)	33.50	29.61
GPRS (2 TX Slots)	32.77	28.86
GPRS (3 TX Slots)	31.04	27.05
GPRS (4 TX Slots)	29.95	25.94
EGPRS (1 TX Slot)	27.80	25.74
EGPRS (2 TX Slots)	26.62	24.47
EGPRS (3 TX Slots)	24.45	22.09
EGPRS (4 TX Slots)	23.23	20.69

Mode	Average Power (dBm)		
	WCDMA Band II	WCDMA Band IV	WCDMA Band V
AMR 12.2 kbps	22.84	22.70	23.25
RMC 12.2 kbps	22.79	22.66	23.30
HSDPA Sub-test 1	21.80	21.74	22.27
HSDPA Sub-test 2	21.23	21.24	21.74
HSDPA Sub-test 3	21.27	21.27	21.78
HSDPA Sub-test 4	21.29	21.15	21.73
HSUPA Sub-test 1	19.72	19.65	20.16
HSUPA Sub-test 2	20.24	20.13	20.66
HSUPA Sub-test 3	20.75	20.62	21.17
HSUPA Sub-test 4	19.74	19.63	20.16
HSUPA Sub-test 5	21.72	21.62	22.16

Mode	Average Power (dBm)				
	LTE Band 7	LTE Band 25	LTE Band 26	LTE Band 41	LTE Band 66
BW/1.4 MHz	/	23.65	23.41	/	22.89
BW/3.0 MHz	/	23.40	23.57	/	22.79
BW/5.0 MHz	23.29	23.75	23.93	23.79	23.12
BW/10 MHz	23.26	23.63	23.54	23.77	22.98
BW/15 MHz	23.30	23.67	23.70	23.78	23.01
BW/20 MHz	23.28	23.72	/	23.8	24.33

WLAN 2.4 GHz Band Average Power (dBm)				
Mode/Band	b	g	n (HT-20)	n (HT-40)
WLAN 2.4GHz	18.85	17.61	17.48	17.26

WLAN 5.2 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.2GHz	17.48	16.64	15.30	15.30	16.77	15.49

WLAN 5.8 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.8GHz	16.10	15.12	13.09	12.65	15.11	13.09

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
Bluetooth	7.44	6.99	7.21	7.33	7.65	7.38	7.36

NFC Band Average Power (dBm)	
Mode/Band	ASK
NFC	-59.54

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
SZR012500215-5	SAR
<i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i>	

5.6 Test Location

JianYan Testing Group Shenzhen Co., Ltd.
 1-2, Building 16, No. 16, Yuefu Avenue, Beibei District, Chongqing, People's Republic of China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

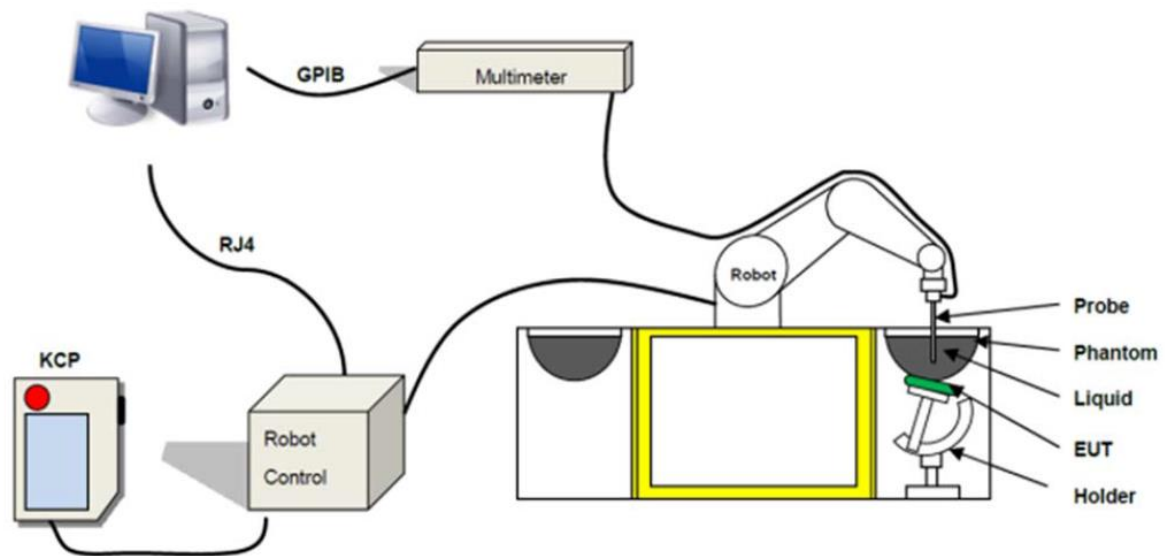


Fig. 8.1 MVG COMOSAR System Configurations

These measurements were performed with the automated near-field scanning system COMOSAR from MVG. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

The MVG COMOSAR system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification


Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency Range	150 MHz to 6 GHz
Dynamic Range	0.01W/kg to 100W/kg
Probe linearity	<0.25dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance between dipoles / probe extremity: 1 mm



Fig. 8.2 Photo of E-Field Probe

➤ E-Field Probe Calibration

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEEE Std 1528: 2013, with CALISAR, MVG proprietary calibration system. The calibration is performed with the technique using reference waveguide.

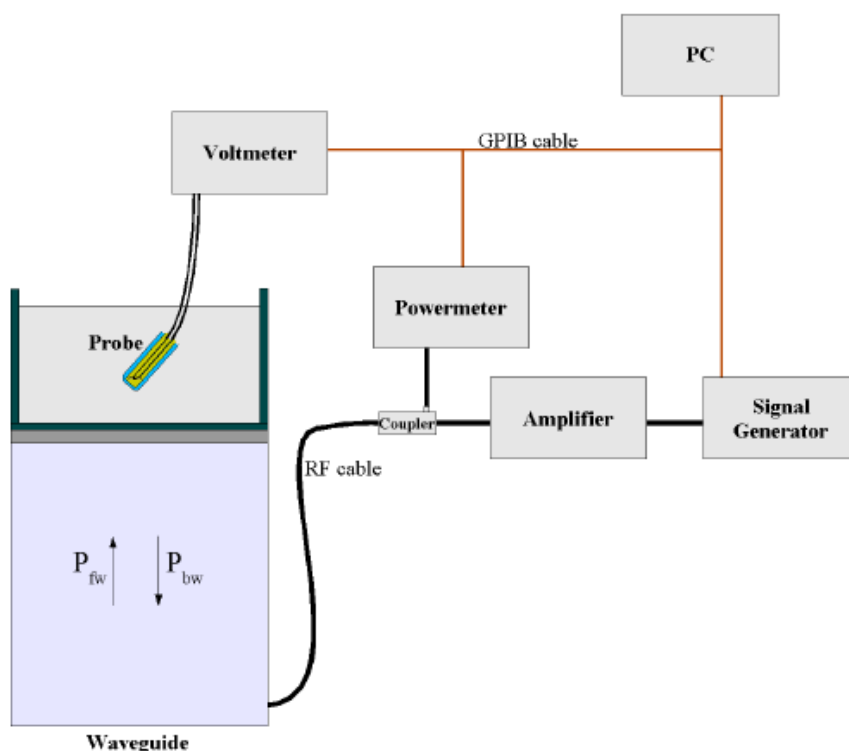

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\sigma)z}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- σ = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

8.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

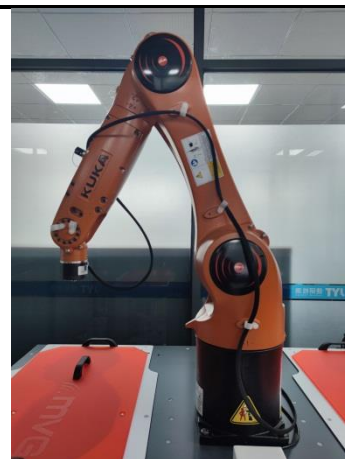


Fig. 8.4 Photo of Robot

8.3 Phantom

<SAM Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 27 liters	
Dimensions	Length: 1000mm; Width: 500mm; Height: 200mm	
Material	Fiberglass based	
Relative permittivity	3-4	
Loss tangent	0.02	
Measurement Areas	Left Head, Right Head, Flat phantom	

Fig. 8.7 Photo of SAM Phantom

The phantom developed by MVG is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

8.4 Device Holder

The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

<Device Holder for SAM Phantom>

Model	Handset Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	The positioning system developed by MVG allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail “x axis” so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular “y axis” and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device's acoustical output.	
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°	

Fig. 8.9 Photo of Device Holder

8.5 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
MVG	COMOSAR DOSIMETRIC E FIELD PROBE	SSE2	WXJ076-23	07.11.2024	07.10.2025
MVG	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	WXJ076-5	03.06.2024	03.05.2027
MVG	COMOSAR 1750 MHz REFERENCE DIPOLE	SID1750	WXJ076-8	03.06.2024	03.05.2027
MVG	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	WXJ076-9	03.06.2024	03.05.2027
MVG	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	WXJ076-12	03.06.2024	03.05.2027
MVG	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	WXJ076-13	03.06.2024	03.05.2027
MVG	COMOSAR 5200-5800 MHz REFERENCE DIPOLE	SID5000	WXJ076-21	03.06.2024	03.05.2027
KEITHLEY	DIGIT MULTIMETER	DMM6500	WXJ076-1	09.19.2024	09.18.2025
MVG	MVG Measurement Software	OpenSAR	Version: V5_01_09	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-2	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-3	N.C.R	N.C.R
MVG	MOBILE PHONE POSITIONING SYSTEM	N/A	WXG009-4	N.C.R	N.C.R
KUKA	Robot	KR 6 R900 sixx	WXG009-1	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-4	01.09.2026	01.08.2027
R&S	Universal Radio Communication Tester	CMU200	WXJ008	01.09.2025	01.08.2027
HP	Network Analyzer	8753D	WXJ024	05.11.2024	05.10.2026
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	06.11.2024	06.10.2025
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	06.11.2024	06.10.2025
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	06.11.2024	06.10.2025
KEYSIGHT	Signal Generator	N5173B	WXJ095-3	09.19.2024	09.18.2025
Huber Suhner	RF Cable	SUCOFLEX	WXG011-2	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG011-3	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG011-4	See Note 3	
Weinschel	Attenuator	RBK18S50	WXG011-11	See Note 3	
N/A	Directional Coupler	SHWDGP-050180-10S	WXG008-12	See Note 3	
MVG	LIMESAR DIELECTRIC PROBE	SCLMP	WXG009-5	See Note 4	
N/A	Low-frequency Amplifier	N/A	WXG008-6	See Note 5	
N/A	Wideband Amplifier	WDA-00100800-24P26	WXG008-5	See Note 5	

Note:

1. The calibration certificate of MVG can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by MVG.
5. In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

7. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.



Fig. 9.1 Photo of Liquid Height for Head SAR (depth>15cm)

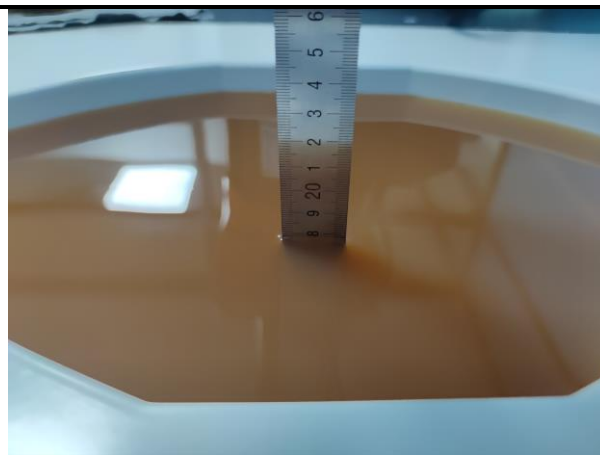


Fig. 9.2 Photo of Liquid Height for Body SAR (depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m

The dielectric parameters of liquids were verified prior to the SAR evaluation using a MVG Liquid measurement Kit and an Agilent Network Analyser.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
835	22.6	0.94	41.68	0.90	41.50	4.44	0.43	±5	5/31/2025
1750	22.5	1.32	40.51	1.37	40.10	-3.65	1.02	±5	6/3/2025
1900	22.5	1.43	40.23	1.40	40.00	2.14	0.57	±5	6/3/2025
2450	22.3	1.74	39.31	1.80	39.20	-3.33	0.28	±5	6/6/2025
2600	22.3	1.87	40.66	1.96	39.00	-4.59	4.26	±5	6/6/2025
5200	22.7	4.86	36.48	4.66	36.00	4.29	1.33	±5	6/9/2025
5800	22.7	5.53	35.78	5.27	35.30	4.93	1.36	±5	6/9/2025

10 SAR System Verification

Each ComoSAR system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the OpenSAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

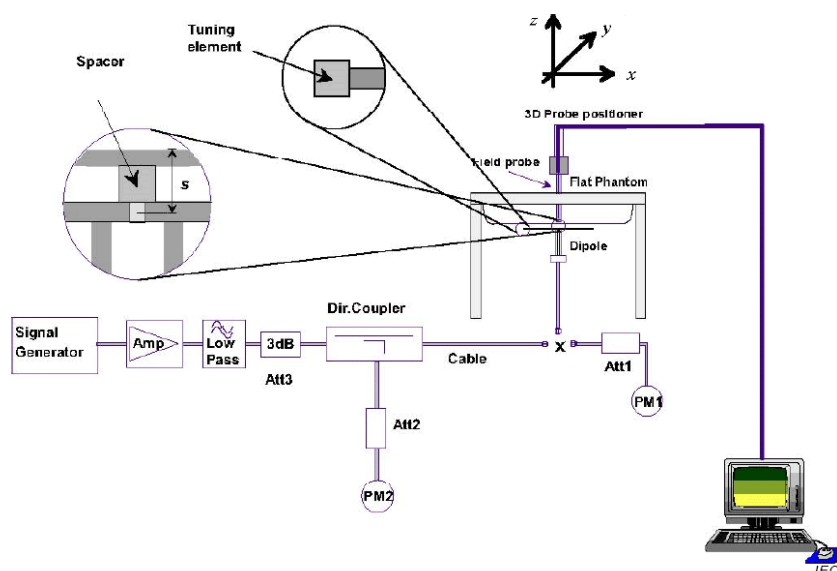


Fig.10.1 System Verification Setup Diagram

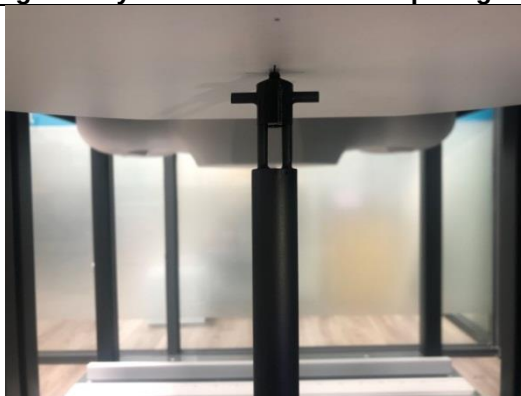


Fig.10.2 Photo of Dipole setup



➤ System Verification Results

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
5/31/2025	835	100	0.895	8.95	9.56	-6.38
6/3/2025	1750	100	3.278	32.78	36.4	-9.95
6/3/2025	1900	100	3.852	38.52	39.7	-2.97
6/6/2025	2450	100	5.006	50.06	52.4	-4.47
6/6/2025	2600	100	6.031	60.31	55.3	9.06
6/9/2025	5200	40	2.829	70.73	76.5	-7.55
6/9/2025	5800	40	2.915	72.88	78	-6.57

11 EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/ Left /Right /Top /Bottom of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

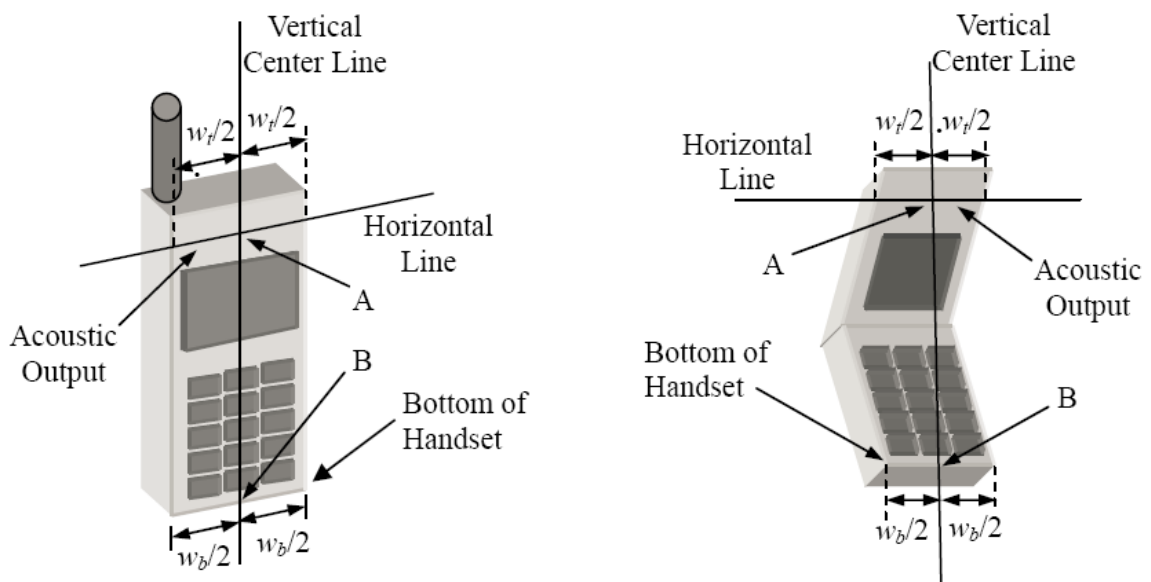


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15o Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

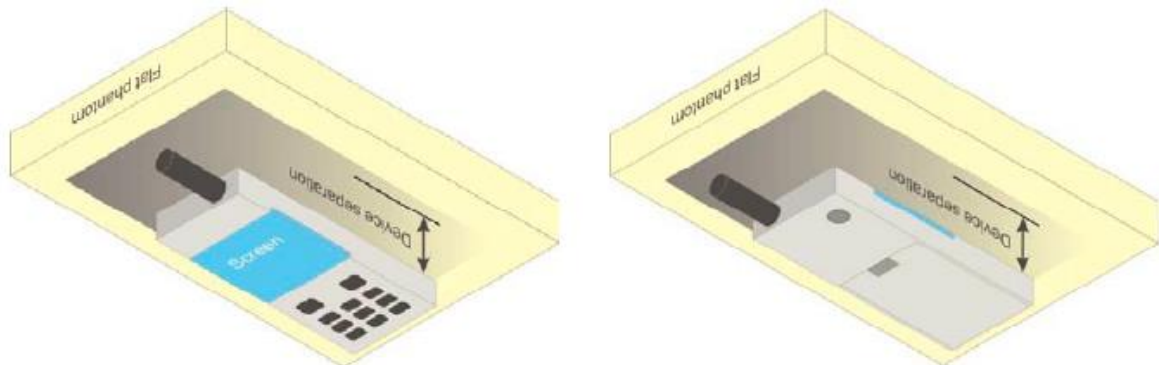


Fig.11.5 Illustration for Body Worn Position

11.6 Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

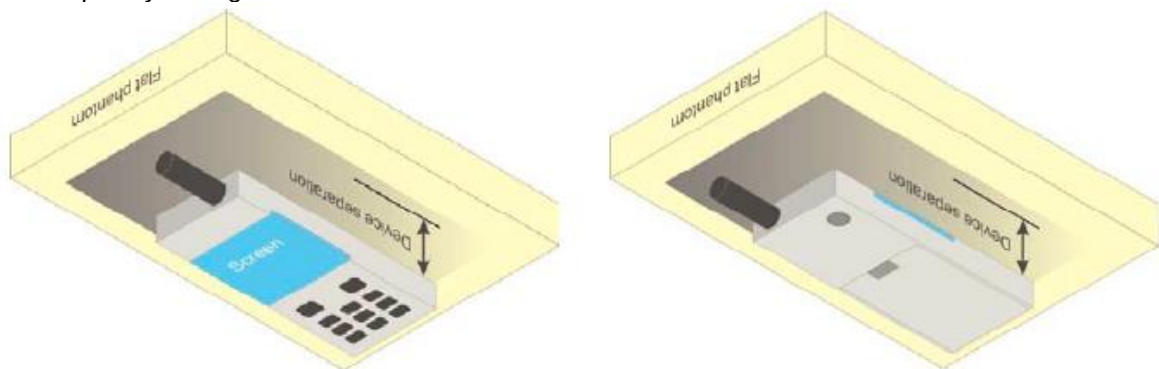


Fig.11.6 Illustration for Hotspot Position

12 Measurement Procedures

The measurement procedures are as below:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the OpenSAR software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OpenSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

12.5 SAR Averaged Methods

In COMOSAR system, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	33.27	33.44	33.27	24.24	24.41	24.24
GPRS (GMSK, 1 TX slot)	33.35	33.50	33.31	24.32	24.47	24.28
GPRS (GMSK, 2 TX slots)	32.61	32.77	32.61	26.59	26.75	26.59
GPRS (GMSK, 3 TX slots)	30.88	31.04	30.87	26.62	26.78	26.61
GPRS (GMSK, 4 TX slots)	29.79	29.95	29.79	26.78	26.94	26.78
EGPRS (8PSK, 1 TX slot)	27.70	27.66	27.80	18.67	18.63	18.77
EGPRS (8PSK, 2 TX slots)	26.59	26.51	26.62	20.57	20.49	20.60
EGPRS (8PSK, 3 TX slots)	24.45	24.43	24.42	20.19	20.17	20.16
EGPRS (8PSK, 4 TX slots)	23.15	23.11	23.23	20.14	20.10	20.22

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Body worn SAR testing, GSM Voice, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power..
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Band: PCS 1900	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.45	29.71	29.55	20.42	20.68	20.52
GPRS (GMSK, 1 TX slot)	29.40	29.61	29.47	20.37	20.58	20.44
GPRS (GMSK, 2 TX slots)	28.61	28.86	28.76	22.59	22.84	22.74
GPRS (GMSK, 3 TX slots)	26.66	27.03	27.05	22.40	22.77	22.79
GPRS (GMSK, 4 TX slots)	25.60	25.93	25.94	22.59	22.92	22.93
EGPRS (8PSK, 1 TX slot)	25.74	25.49	24.87	16.71	16.46	15.84
EGPRS (8PSK, 2 TX slots)	24.47	24.24	23.60	18.45	18.22	17.58
EGPRS (8PSK, 3 TX slots)	22.09	21.88	21.24	17.83	17.62	16.98
EGPRS (8PSK, 4 TX slots)	20.69	20.44	19.83	17.68	17.43	16.82

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 1900 Voice mode.
- For Body worn SAR testing, GSM Voice, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power..
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	23.25	23.23	23.21
RMC 12.2 kbps	23.18	23.30	23.18
HSDPA Sub-test 1	22.16	22.27	22.14
HSDPA Sub-test 2	21.63	21.74	21.62
HSDPA Sub-test 3	21.67	21.78	21.65
HSDPA Sub-test 4	21.64	21.73	21.58
HSUPA Sub-test 1	20.11	20.16	20.03
HSUPA Sub-test 2	20.57	20.66	20.54
HSUPA Sub-test 3	21.10	21.17	21.04
HSUPA Sub-test 4	20.07	20.16	20.04
HSUPA Sub-test 5	22.07	22.16	21.99

WCDMA Average power (dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
AMR 12.2 kbps	22.52	22.70	22.62
RMC 12.2 kbps	22.48	22.66	22.60
HSDPA Sub-test 1	21.51	21.74	21.67
HSDPA Sub-test 2	21.05	21.24	21.14
HSDPA Sub-test 3	21.12	21.27	21.18
HSDPA Sub-test 4	20.98	21.15	21.07
HSUPA Sub-test 1	19.50	19.65	19.56
HSUPA Sub-test 2	19.99	20.13	20.04
HSUPA Sub-test 3	20.46	20.62	20.53
HSUPA Sub-test 4	19.47	19.63	19.56
HSUPA Sub-test 5	21.47	21.62	21.54

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	22.62	22.82	22.84
RMC 12.2 kbps	22.63	22.79	22.78
HSDPA Sub-test 1	21.57	21.74	21.80
HSDPA Sub-test 2	21.04	21.22	21.23
HSDPA Sub-test 3	21.07	21.26	21.27
HSDPA Sub-test 4	21.05	21.26	21.29
HSUPA Sub-test 1	19.53	19.67	19.72
HSUPA Sub-test 2	20.02	20.21	20.24
HSUPA Sub-test 3	20.52	20.72	20.75
HSUPA Sub-test 4	19.55	19.73	19.74
HSUPA Sub-test 5	21.50	21.68	21.72

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> ?$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> ?$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

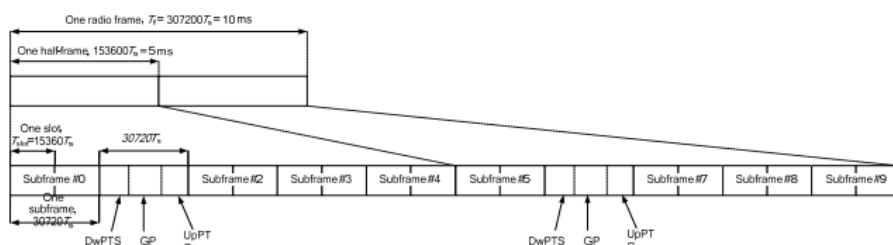


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_F = 307200 T_s = 10$ ms consists of two half-frames of length $153600 T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 7 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535MHz	2567.5MHz
Band 7	5	QPSK	1	0	23.19	23.11	23.29
			1	12	23.11	23.03	23.25
			1	24	22.97	23.19	23.01
			12	0	21.63	22.07	22.33
			12	6	21.71	22.09	22.33
			12	11	22.02	22.12	22.35
			25	0	22.08	22.16	22.39
		16QAM	1	0	21.99	22.26	22.30
			1	12	21.86	21.78	22.25
			1	24	21.88	22.27	22.24
			12	0	20.76	21.16	21.41
			12	6	20.76	21.23	21.42
			12	11	21.09	21.19	21.41
			25	0	21.10	21.19	21.41
		64QAM	1	0	20.83	21.60	21.52
			1	12	20.92	21.67	21.48
			1	24	20.77	21.71	21.50
			12	0	19.77	20.20	20.45
			12	6	20.10	20.22	20.45
			12	11	20.11	20.23	20.43
			25	0	20.09	20.18	20.39

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505MHz	2535MHz	2565MHz
Band 7	10	QPSK	1	0	23.26	23.07	23.17
			1	24	23.05	23.05	22.85
			1	49	23.19	23.15	22.61
			25	0	22.25	22.33	22.24
			25	12	22.28	22.27	22.29
			25	24	22.26	22.23	22.29
			50	0	22.24	22.31	22.35
		16QAM	1	0	22.38	22.35	22.00
			1	24	22.29	22.30	21.64
			1	49	22.44	22.38	21.66
			25	0	21.29	21.35	21.35
			25	12	21.25	21.29	21.31
			25	24	21.23	21.27	21.34
			50	0	21.20	21.28	21.31
		64QAM	1	0	21.20	21.10	21.16
			1	24	21.22	21.17	21.15
			1	49	21.32	21.38	21.08
			25	0	20.27	20.27	20.33
			25	12	20.28	20.26	20.29
			25	24	20.25	20.26	20.28
			50	0	20.22	20.27	20.30

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535MHz	2562.5MHz
Band 7	15	QPSK	1	0	23.13	23.06	22.99
			1	37	22.89	23.05	22.82
			1	74	23.19	23.30	22.69
			36	0	22.13	22.17	22.25
			36	16	22.15	22.19	22.23
			36	35	22.15	22.18	22.24
			75	0	22.14	22.24	22.32
		16QAM	1	0	21.95	21.88	21.84
			1	37	21.92	22.06	21.86
			1	74	21.95	21.73	22.03
			36	0	21.23	21.20	21.27
			36	16	21.24	21.18	21.28
			36	35	21.24	21.19	21.26
			75	0	21.21	21.26	21.30
		64QAM	1	0	21.40	21.32	20.78
			1	37	21.09	21.42	20.80
			1	74	21.01	21.16	20.86
			36	0	20.18	20.19	20.33
			36	16	20.16	20.21	20.32
			36	35	20.17	20.21	20.34
			75	0	20.19	20.26	20.31

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510MHz	2535MHz	2560MHz
Band 7	20	QPSK	1	0	23.23	22.89	23.28
			1	49	23.12	23.01	23.10
			1	99	23.14	23.10	22.77
			50	0	22.23	22.24	22.19
			50	24	22.24	22.25	22.23
			50	49	22.24	22.22	22.21
			100	0	22.20	22.25	22.29
		16QAM	1	0	22.49	22.18	22.27
			1	49	22.35	22.27	21.76
			1	99	22.46	22.36	21.89
			50	0	21.25	21.29	21.21
			50	24	21.25	21.30	21.26
			50	49	21.24	21.28	21.25
			100	0	21.22	21.26	21.30
		64QAM	1	0	21.40	21.06	21.51
			1	49	21.32	21.23	21.29
			1	99	21.35	21.24	21.06
			50	0	20.28	20.27	20.25
			50	24	20.28	20.27	20.26
			50	49	20.27	20.23	20.28
			100	0	20.25	20.26	20.26

LTE Band 25 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26047	26365	26683
					1850.7	1882.5	1914.3
Band 25	1.4	QPSK	1	0	23.30	23.42	23.50
			1	2	23.20	23.49	23.32
			1	5	23.27	23.48	23.45
			3	0	23.32	23.52	23.60
			3	1	23.28	23.59	23.54
			3	2	23.29	23.56	23.65
			6	0	22.32	22.51	22.59
		16QAM	1	0	22.42	22.68	22.70
			1	2	22.44	22.69	22.67
			1	5	22.39	22.63	22.68
			3	0	22.27	22.67	22.49
			3	1	22.21	22.47	22.45
			3	2	22.24	22.44	22.49
			6	0	21.41	21.64	21.46
		64QAM	1	0	21.66	21.99	21.57
			1	2	21.71	21.91	21.66
			1	5	21.90	21.90	21.63
			3	0	21.36	21.59	21.42
			3	1	21.47	21.64	21.41
			3	2	21.34	21.54	21.40
			6	0	20.25	20.61	20.62

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26055	26365	26675
					1851.5	1882.5	1913.5
Band 25	3	QPSK	1	0	23.27	23.40	23.39
			1	7	23.11	23.37	23.36
			1	14	23.22	23.38	23.36
			8	0	22.14	22.41	22.46
			8	4	22.12	22.41	22.43
			8	7	22.16	22.38	22.47
			15	0	22.16	22.37	22.44
		16QAM	1	0	22.47	22.54	22.61
			1	7	22.40	22.52	22.53
			1	14	22.37	22.50	22.51
			8	0	21.17	21.45	21.46
			8	4	21.18	21.45	21.49
			8	7	21.21	21.43	21.49
			15	0	21.20	21.38	21.34
		64QAM	1	0	21.23	21.37	21.42
			1	7	21.27	21.36	21.40
			1	14	21.14	21.37	21.41
			8	0	20.31	20.61	20.63
			8	4	20.27	20.61	20.63
			8	7	20.28	20.57	20.64
			15	0	20.31	20.62	20.57

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26065	26365	26665
					1852.5	1882.5	1912.5
Band 25	5	QPSK	1	0	23.50	23.75	23.59
			1	12	23.42	23.60	23.71
			1	24	23.59	23.59	23.66
			12	0	22.41	22.56	22.58
			12	6	22.37	22.57	22.58
			12	11	22.36	22.52	22.57
			25	0	22.41	22.59	22.62
		16QAM	1	0	22.36	22.61	22.77
			1	12	22.39	22.58	22.80
			1	24	22.42	22.59	22.81
			12	0	21.42	21.60	21.66
			12	6	21.42	21.60	21.67
			12	11	21.40	21.56	21.65
			25	0	21.42	21.59	21.59
		64QAM	1	0	21.36	21.66	22.18
			1	12	21.39	21.55	22.16
			1	24	21.43	21.55	22.15
			12	0	20.55	20.76	20.78
			12	6	20.53	20.77	20.81
			12	11	20.53	20.74	20.80
			25	0	20.51	20.72	20.67

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26090	26365	26640
					1855	1882.5	1910
Band 25	10	QPSK	1	0	23.34	23.63	23.40
			1	24	23.30	23.54	23.51
			1	49	23.39	23.57	23.57
			25	0	22.38	22.58	22.58
			25	12	22.38	22.59	22.57
			25	24	22.41	22.55	22.57
			50	0	22.38	22.57	22.57
		16QAM	1	0	22.60	22.84	22.60
			1	24	22.59	22.73	22.71
			1	49	22.60	22.72	22.79
			25	0	21.41	21.58	21.61
			25	12	21.40	21.58	21.57
			25	24	21.42	21.54	21.61
			50	0	21.37	21.56	21.55
		64QAM	1	0	21.47	21.60	21.45
			1	24	21.44	21.54	21.65
			1	49	21.47	21.54	21.66
			25	0	20.40	20.70	20.62
			25	12	20.37	20.72	20.61
			25	24	20.45	20.67	20.61
			50	0	20.45	20.66	20.64

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26115	26365	26615
					1857.5	1882.5	1907.5
Band 25	15	QPSK	1	0	23.48	23.63	23.45
			1	37	23.47	23.67	23.57
			1	74	23.47	23.50	23.61
			36	0	21.72	21.64	21.78
			36	16	21.74	21.60	21.88
			36	35	21.73	21.50	21.88
			75	0	22.40	22.58	22.57
		16QAM	1	0	22.70	22.84	22.70
			1	37	22.72	22.81	22.85
			1	74	22.73	22.74	22.89
			36	0	21.75	21.63	21.73
			36	16	21.74	21.60	21.84
			36	35	21.75	21.50	21.89
			75	0	21.44	21.55	21.56
		64QAM	1	0	21.73	21.62	21.72
			1	37	21.74	21.60	21.85
			1	74	21.76	21.52	21.88
			36	0	21.71	21.63	21.77
			36	16	21.74	21.62	21.88
			36	35	21.75	21.49	21.94
			75	0	20.54	20.69	20.67

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26140	26365	26590
					1860	1882.5	1905
Band 25	20	QPSK	1	0	23.43	23.72	23.49
			1	49	23.47	23.69	23.64
			1	99	23.45	23.72	23.70
			50	0	22.38	22.67	22.56
			50	24	22.39	22.67	22.57
			50	49	22.47	22.58	22.64
			100	0	22.44	22.63	22.59
		16QAM	1	0	22.72	22.75	22.72
			1	49	22.78	22.72	22.90
			1	99	22.71	22.68	22.93
			50	0	21.41	21.67	21.57
			50	24	21.39	21.67	21.57
			50	49	21.45	21.57	21.65
			100	0	21.42	21.62	21.57
		64QAM	1	0	21.78	22.04	21.73
			1	49	21.69	22.02	21.86
			1	99	21.71	21.94	22.00
			50	0	20.53	20.78	20.69
			50	24	20.51	20.77	20.69
			50	49	20.53	20.68	20.74
			100	0	20.52	20.69	20.69

LTE Band 26 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26697	26865	27033
					814.7MHz	831.5MHz	848.3MHz
Band 26	1.4	QPSK	1	0	23.14	23.07	22.66
			1	2	23.04	22.95	22.17
			1	5	23.07	23.07	21.9
			3	0	23.04	22.94	22.49
			3	1	23.03	22.93	22.48
			3	2	23.03	22.93	22.02
			6	0	23.01	22.91	22.3
		16QAM	1	0	22.87	22.79	22.52
			1	2	22.86	22.79	22.1
			1	5	22.85	22.77	21.76
			3	0	22.82	22.82	22.25
			3	1	22.82	22.82	22.23
			3	2	22.81	22.75	21.8
			6	0	22.34	22.27	22.24
		64QAM	1	0	22.25	22.22	22.77
			1	2	22.28	22.24	22.33
			1	5	22.26	22.19	22.06
			3	0	22.31	22.21	22.37
			3	1	22.31	22.26	22.36
			3	2	22.31	22.31	21.93
			6	0	21.28	21.23	21.39

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26705	26865	27025
					815.5MHz	831.5MHz	847.5MHz
Band 26	3	QPSK	1	0	23.06	23.03	23.57
			1	7	22.9	22.84	22.72
			1	14	23.03	23.01	21.94
			8	0	22.9	22.86	23.24
			8	4	22.89	22.85	23.24
			8	7	22.88	22.83	22.46
			15	0	22.86	22.82	22.83
		16QAM	1	0	22.84	22.75	23.48
			1	7	22.66	22.62	22.66
			1	14	22.79	22.69	21.89
			8	0	22.55	22.51	22.66
			8	4	22.55	22.46	22.67
			8	7	22.56	22.49	22.4
			15	0	22.48	22.41	22.57
		64QAM	1	0	21.79	21.75	22.4
			1	7	21.8	21.70	22.46
			1	14	21.82	21.78	21.76
			8	0	21.55	21.48	21.62
			8	4	21.57	21.55	21.64
			8	7	21.56	21.56	21.57
			15	0	21.52	21.45	21.63

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26715	26865	27015
					816.5MHz	831.5MHz	846.6MHz
Band 26	5	QPSK	1	0	23.19	23.18	23.93
			1	12	23.09	23.03	23.25
			1	24	23.13	23.05	21.98
			12	0	22.97	22.87	23.6
			12	6	22.96	22.93	23.61
			12	11	22.95	22.95	22.65
			25	0	23	22.94	23.19
		16QAM	1	0	23.16	23.08	23.65
			1	12	23.08	23.08	23.11
			1	24	23.15	23.10	21.86
			12	0	22.67	22.64	22.64
			12	6	22.66	22.63	22.64
			12	11	22.65	22.64	22.58
			25	0	22.6	22.60	22.67
		64QAM	1	0	23	22.91	22.46
			1	12	22.98	22.98	22.44
			1	24	22.52	22.50	21.72
			12	0	21.64	21.56	21.68
			12	6	21.62	21.55	21.65
			12	11	21.62	21.52	21.63
			25	0	21.6	21.56	21.63

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26740	26865	26990
					819MHz	831.5MHz	844MHz
Band 26	10	QPSK	1	0	22.55	22.46	23.54
			1	24	23.12	23.04	23.51
			1	49	22.58	22.55	22.03
			25	0	22.81	22.72	23.47
			25	12	22.83	22.81	23.48
			25	24	22.83	22.78	23.11
			50	0	22.87	22.86	23.29
		16QAM	1	0	22.34	22.34	23.31
			1	24	22.91	22.85	23.31
			1	49	22.37	22.37	21.82
			25	0	22.57	22.49	22.64
			25	12	22.54	22.51	22.63
			25	24	22.55	22.47	22.6
			50	0	22.6	22.51	22.6
		64QAM	1	0	21.87	21.85	22.48
			1	24	21.86	21.83	22.39
			1	49	22.03	21.93	21.74
			25	0	21.54	21.54	21.6
			25	12	21.53	21.49	21.61
			25	24	21.53	21.52	21.54
			50	0	21.61	21.61	21.61

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26765	26865	26965
					821.5MHz	831.5MHz	841.5MHz
Band 26	15	QPSK	1	0	22.88	22.98	23.7
			1	37	23.22	23.28	23.58
			1	74	23.51	23.6	22.4
			36	0	22.64	22.72	22.53
			36	16	22.77	22.84	22.55
			36	35	22.77	22.86	22.2
			75	0	23.27	23.27	23.49
		16QAM	1	0	23.00	23.06	23.61
			1	37	23.29	23.38	23.52
			1	74	23.63	23.69	22.35
			36	0	22.71	22.74	22.54
			36	16	22.77	22.86	22.54
			36	35	22.85	22.87	22.17
			75	0	22.69	22.73	22.65
		64QAM	1	0	22.71	22.72	22.55
			1	37	22.79	22.84	22.56
			1	74	22.82	22.87	22.16
			36	0	22.70	22.77	22.54
			36	16	22.85	22.85	22.55
			36	35	22.80	22.87	22.18
			75	0	21.63	21.73	21.71

LTE Band 41 part:

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39675	40148	40620	41093	41565
					2498.5MHz	2545.5MHz	2593.0MHz	2640.3MHz	2687.5MHz
Band 41	5	QPSK	1	0	23.47	23.30	23.60	23.40	23.12
			1	12	23.63	23.43	23.79	23.55	23.22
			1	24	23.45	23.27	23.71	23.42	23.09
			12	0	22.53	22.37	22.66	22.46	22.20
			12	6	22.54	22.36	22.66	22.46	22.17
			12	11	22.54	22.36	22.65	22.45	22.17
			25	0	22.56	22.40	22.73	22.51	22.24
		16QAM	1	0	22.60	22.42	22.94	22.59	22.24
			1	12	22.73	22.55	23.08	22.73	22.37
			1	24	22.61	22.43	22.98	22.61	22.24
			12	0	21.56	21.39	21.64	21.47	21.21
			12	6	21.55	21.39	21.64	21.47	21.23
			12	11	21.52	21.37	21.62	21.45	21.22
			25	0	21.55	21.39	21.74	21.51	21.23
		64QAM	1	0	21.90	21.75	21.86	21.78	21.59
			1	12	22.05	21.87	22.03	21.92	21.69
			1	24	21.90	21.73	21.93	21.79	21.55
			12	0	20.64	20.48	20.73	20.56	20.32
			12	6	20.67	20.50	20.71	20.57	20.32
			12	11	20.68	20.52	20.74	20.59	20.36
			25	0	20.55	20.41	20.83	20.55	20.27

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39700	40160	40620	41080	41540
					2501.0MHz	2547.0MHz	2593.0MHz	2639.0MHz	2685.0MHz
Band 41	10	QPSK	1	0	23.56	23.40	23.67	23.49	23.23
			1	24	23.57	23.44	23.77	23.55	23.30
			1	49	23.53	23.40	23.75	23.52	23.27
			25	0	22.48	22.35	22.67	22.45	22.21
			25	12	22.48	22.34	22.64	22.44	22.20
			25	24	22.49	22.36	22.66	22.46	22.22
			50	0	22.48	22.34	22.70	22.46	22.20
		16QAM	1	0	22.21	22.06	22.84	22.32	21.90
			1	24	22.22	22.09	22.92	22.36	21.95
			1	49	22.18	22.06	22.92	22.35	21.94
			25	0	21.44	21.33	21.73	21.46	21.22
			25	12	21.44	21.32	21.71	21.45	21.20
			25	24	21.47	21.34	21.72	21.47	21.21
			50	0	21.48	21.36	21.68	21.47	21.24
		64QAM	1	0	21.25	21.09	21.91	21.36	20.92
			1	24	21.29	21.14	22.06	21.45	20.99
			1	49	21.24	21.10	21.99	21.39	20.95
			25	0	20.44	20.32	20.71	20.45	20.20
			25	12	20.42	20.30	20.74	20.45	20.18
			25	24	20.44	20.30	20.72	20.44	20.15
			50	0	20.49	20.37	20.77	20.50	20.25

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39750	40185	40620	41055	41490
					2506.0MHz	2549.5MHz	2593.0MHz	2636.5MHz	2680.0MHz
Band 41	15	QPSK	1	0	23.59	23.41	23.59	23.47	23.22
			1	37	23.69	23.54	23.78	23.62	23.39
			1	74	23.55	23.40	23.69	23.49	23.24
			36	0	22.44	22.30	22.63	22.41	22.16
			36	16	22.48	22.33	22.66	22.44	22.18
			36	35	22.45	22.31	22.65	22.42	22.16
			75	0	22.51	22.35	22.71	22.47	22.19
		16QAM	1	0	22.34	22.16	22.76	22.36	21.98
			1	37	22.44	22.29	22.94	22.51	22.14
			1	74	22.29	22.14	22.83	22.37	21.99
			36	0	21.41	21.28	21.65	21.40	21.15
			36	16	21.42	21.29	21.63	21.40	21.16
			36	35	21.40	21.28	21.62	21.39	21.16
			75	0	21.47	21.32	21.69	21.44	21.17
		64QAM	1	0	21.65	21.48	21.90	21.62	21.30
			1	37	21.77	21.63	22.05	21.77	21.49
			1	74	21.65	21.49	21.93	21.64	21.33
			36	0	20.52	20.39	20.68	20.49	20.26
			36	16	20.50	20.38	20.68	20.48	20.26
			36	35	20.54	20.39	20.66	20.48	20.24
			75	0	20.51	20.35	20.75	20.48	20.19

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39750	40185	40620	41055	41490
					2506.0MHz	2549.5MHz	2593.0MHz	2636.5MHz	2680.0MHz
Band 41	20	QPSK	1	0	23.44	23.21	23.51	23.31	22.97
			1	49	23.59	23.42	23.80	23.55	23.25
			1	99	23.38	23.22	23.65	23.36	23.05
			50	0	22.40	22.29	22.58	22.38	22.17
			50	24	22.40	22.28	22.55	22.37	22.15
			50	49	22.42	22.30	22.60	22.40	22.18
			100	0	22.48	22.30	22.60	22.40	22.11
		16QAM	1	0	22.44	21.99	22.49	22.15	21.53
			1	49	22.60	22.21	22.81	22.41	21.82
			1	99	22.38	22.00	22.65	22.21	21.61
			50	0	21.42	21.31	21.60	21.40	21.19
			50	24	21.41	21.31	21.60	21.40	21.20
			50	49	21.41	21.30	21.60	21.40	21.19
			100	0	21.45	21.28	21.61	21.39	21.11
		64QAM	1	0	21.31	21.17	21.39	21.24	21.02
			1	49	21.51	21.42	21.71	21.52	21.33
			1	99	21.28	21.19	21.51	21.29	21.09
			50	0	20.42	20.36	20.64	20.45	20.30
			50	24	20.44	20.38	20.63	20.46	20.32
			50	49	20.45	20.38	20.63	20.46	20.30
			100	0	20.54	20.38	20.65	20.47	20.22

Note:

1. Per KDB 447498 D01v06 section 4.1, the required test channels number is 5 for LTE Band 41.

LTE Band 66 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131979	132322	132665
					1710.70MHz	1745.00MHz	1779.3MHz
Band 66	1.4	QPSK	1	0	22.61	22.62	22.74
			1	2	22.55	22.54	22.64
			1	5	22.60	22.59	22.77
			3	0	22.60	22.81	22.81
			3	1	22.65	22.81	22.89
			3	2	22.66	22.80	22.81
			6	0	21.67	21.70	21.83
		16QAM	1	0	21.78	21.84	21.94
			1	2	21.80	21.82	22.01
			1	5	21.78	21.84	22.00
			3	0	21.61	21.63	21.81
			3	1	21.63	21.69	21.84
			3	2	21.62	21.65	21.81
			6	0	20.85	20.78	20.91
		64QAM	1	0	21.16	20.78	20.99
			1	2	21.07	20.80	20.98
			1	5	21.12	20.80	21.06
			3	0	20.84	20.74	20.87
			3	1	20.83	20.71	20.86
			3	2	20.86	20.76	20.85
			6	0	19.64	19.74	19.87

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131987	132322	132657
					1711.50MHz	1745.00MHz	1778.50MHz
Band 66	3	QPSK	1	0	22.72	22.62	22.79
			1	7	22.59	22.55	22.75
			1	14	22.74	22.68	22.75
			8	0	21.68	21.79	21.88
			8	4	21.66	21.81	21.92
			8	7	21.67	21.75	21.90
			15	0	21.66	21.78	21.95
		16QAM	1	0	21.85	21.81	21.77
			1	7	21.67	21.84	21.71
			1	14	21.69	21.90	21.75
			8	0	20.84	20.96	21.11
			8	4	20.82	20.95	21.14
			8	7	20.82	20.99	21.15
			15	0	20.81	20.87	21.05
		64QAM	1	0	20.77	20.82	21.27
			1	7	20.70	20.85	21.47
			1	14	20.73	20.71	21.38
			8	0	19.84	20.01	20.15
			8	4	19.81	19.96	20.14
			8	7	19.84	19.97	20.10
			15	0	19.84	19.90	19.98

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131997	132322	132647
					1712.50MHz	1745.00MHz	1777.50MHz
Band 66	5	QPSK	1	0	22.90	22.87	23.03
			1	12	22.82	22.87	22.92
			1	24	22.81	22.90	23.12
			12	0	21.71	21.78	21.90
			12	6	21.72	21.81	21.97
			12	11	21.69	21.79	21.94
			25	0	21.74	21.83	21.96
		16QAM	1	0	21.99	21.86	21.96
			1	12	21.84	21.77	22.01
			1	24	21.87	21.85	21.96
			12	0	20.89	21.01	21.16
			12	6	20.91	21.01	21.15
			12	11	20.90	21.02	21.15
			25	0	20.84	21.02	21.12
		64QAM	1	0	21.42	21.17	21.07
			1	12	21.45	21.21	21.18
			1	24	21.39	21.16	21.11
			12	0	19.90	20.04	20.15
			12	6	19.88	20.07	20.15
			12	11	19.89	20.06	20.16
			25	0	19.81	19.99	20.10

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132022	132322	132622
					1715.00MHz	1745.00MHz	1775.00MHz
Band 66	10	QPSK	1	0	22.68	22.80	22.87
			1	24	22.53	22.73	22.85
			1	49	22.63	22.70	22.98
			25	0	21.69	21.78	21.91
			25	12	21.70	21.77	21.93
			25	24	21.71	21.81	21.95
			50	0	21.72	21.85	21.92
		16QAM	1	0	21.99	21.75	21.93
			1	24	21.80	21.75	22.08
			1	49	21.86	21.74	22.10
			25	0	20.76	20.98	21.09
			25	12	20.78	20.97	21.05
			25	24	20.78	20.98	21.07
			50	0	20.77	20.96	21.04
		64QAM	1	0	20.86	21.27	21.09
			1	24	20.70	21.18	20.96
			1	49	20.84	21.26	21.02
			25	0	19.71	19.93	20.08
			25	12	19.74	19.94	20.08
			25	24	19.74	19.94	20.03
			50	0	19.77	19.89	20.02

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132047	132322	132597
					1717.50MHz	1745.00MHz	1772.50MHz
Band 66	15	QPSK	1	0	22.80	22.83	22.92
			1	37	22.78	22.84	22.92
			1	74	22.83	22.83	23.01
			36	0	21.71	21.80	21.87
			36	16	21.73	21.81	21.86
			36	35	21.72	21.82	21.87
			75	0	21.72	21.82	21.95
		16QAM	1	0	22.05	21.84	22.00
			1	37	22.03	21.82	22.07
			1	74	22.14	21.77	22.05
			36	0	20.86	20.93	21.02
			36	16	20.86	20.94	21.02
			36	35	20.86	20.94	21.02
			75	0	20.87	20.96	21.06
		64QAM	1	0	21.13	21.29	20.97
			1	37	21.17	21.23	21.18
			1	74	21.20	21.24	21.12
			36	0	19.79	19.94	20.05
			36	16	19.80	19.95	20.04
			36	35	19.81	19.94	20.05
			75	0	19.85	19.97	20.08

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132072	132322	132572
					1720.00MHz	1745.00MHz	1770.00MHz
Band 66	20	QPSK	1	0	24.27	24.18	24.08
			1	49	24.33	24.14	24.00
			1	99	24.28	24.26	24.03
			50	0	23.11	23.14	23.11
			50	24	23.12	23.14	23.12
			50	49	23.14	23.15	23.11
			100	0	23.18	23.14	23.12
		16QAM	1	0	23.11	23.34	23.01
			1	49	23.15	23.35	22.91
			1	99	23.18	23.61	23.05
			50	0	22.09	22.14	22.15
			50	24	22.10	22.14	22.16
			50	49	22.12	22.15	22.15
			100	0	22.12	22.15	22.11
		64QAM	1	0	22.30	22.28	21.92
			1	49	22.36	22.39	21.85
			1	99	22.37	22.48	21.98
			50	0	21.19	21.26	21.20
			50	24	21.19	21.25	21.20
			50	49	21.20	21.26	21.19
			100	0	21.18	21.28	21.16

13.4 WLAN 2.4 GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)
CH 01	2412	18.71	17.42	17.26
CH 06	2437	17.38	16.27	16.16
CH 11	2462	18.85	17.61	17.48

Average Power (dBm)		
Channel	Frequency (MHz)	802.11n (HT40)
CH 03	2422	16.68
CH 06	2437	16.45
CH 09	2452	17.26

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
b/CH 11	2.462	19.0	79.43	5	24.94	3.0
g/CH 11	2.462	18.0	63.10	5	19.81	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 b mode is required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.5 WLAN 5.2GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 36	5180	16.99	16.07	15.90
CH 40	5200	17.48	16.64	16.77
CH 48	5240	16.94	15.98	16.00

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 38	5190	15.30	15.49
CH 46	5230	15.28	15.37

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 42	5210	15.30

Note:

- SAR test of WLAN 5.2GHz is performed.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.6 WLAN 5.8GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 149	5745	14.08	13.19	13.09
CH 157	5785	15.05	14.07	14.04
CH 165	5825	16.10	15.12	15.11

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 151	5755	12.57	12.59
CH 159	5795	13.09	13.09

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 155	5775	12.65

Note:

- SAR test of WLAN 5.8GHz is performed.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.7 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	7.04	6.57	6.71
CH 39	2441	7.00	6.41	6.66
CH 78	2480	7.44	6.99	7.21

Average Power (dBm)					
Channel	Frequency (MHz)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
CH 00	2402	7.14	7.22	7.05	7.02
CH 20	2442	7.01	7.05	7.08	7.05
CH 39	2480	7.33	7.65	7.38	7.36

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH78	2.480	8.0	5.62	5	1.98	3.0

- The max. tune-up power was provided by manufacturer, based on the result of note 1, RF exposure evaluation is not required.
- The output power of all data rates were pre-scan, just the worst case of all modes were shown in report.
- When the minimum test separation distance is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.

13.8 NFC Conducted Power

Average Power (dBm)	
Frequency (MHz)	ASK
13.56	-59.54

Note:

1. Per KDB 447498 D01v06 section 4.3 Test Exemption, $P_{th}=1+\log(100/f_{MHz})= 1.87mW = 2.72dBm$, $P_{NFC} = -59.54dBm < P_{th}$, SAR test for NFC is not required.
2. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

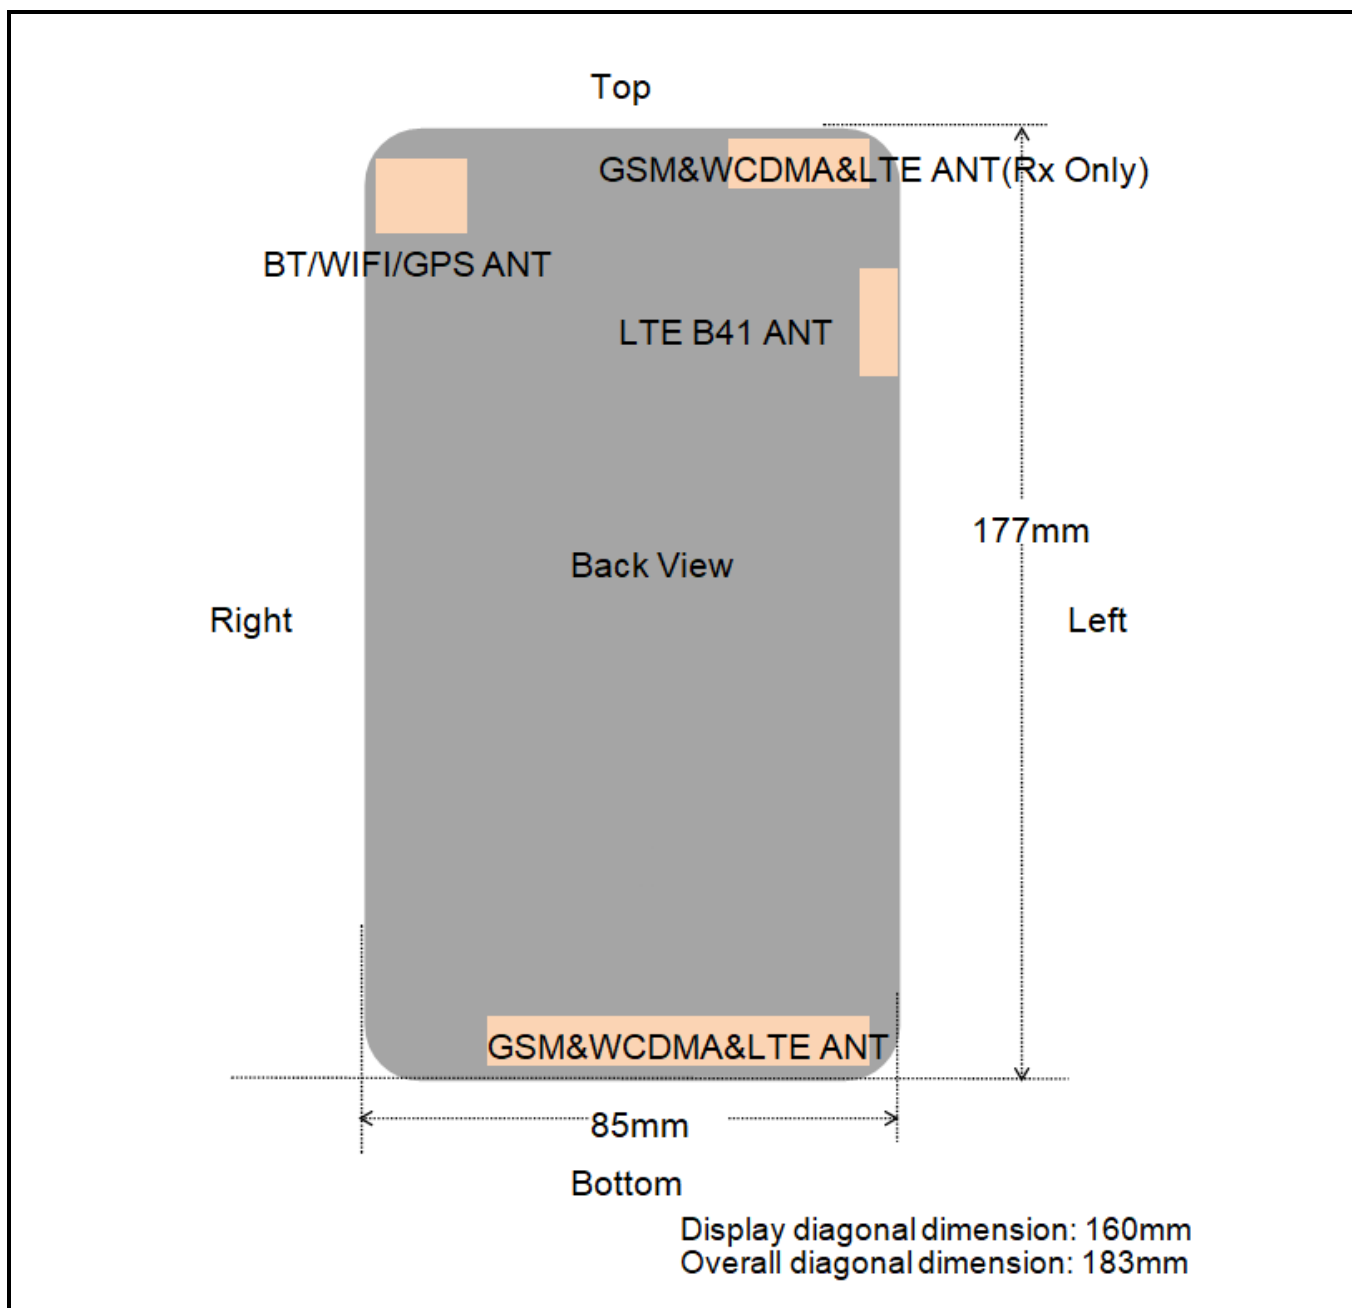


Fig.14.1 EUT Antenna Locations

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

Distance of Antennas to EUT edge/surface Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
GSM&WCDMA<E Main ANT	<25mm	<25mm	155mm	<25mm	<25mm	<25mm
LTE B41 ANT	<25mm	<25mm	<25mm	125mm	75mm	<25mm
WLAN & Bluetooth ANT	<25mm	<25mm	<25mm	150mm	<25mm	60mm

Test Positions Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
GSM&WCDMA<E Main ANT	Yes	Yes	No	Yes	Yes	Yes
LTE B41 ANT	Yes	Yes	Yes	No	No	Yes
WLAN & Bluetooth ANT	Yes	Yes	Yes	No	Yes	No

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for hotspot SAR, and 10 mm for body-worn SAR.
4. Per KDB 648474 D04 v01r03, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2\text{ W/kg}$

15 SAR Test Results Summary

15.1 Standalone Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
1	GSM850/Voice	Right Cheek	190	836.6	33.44	0.65	33.5	0.050	1.014	0.051
	GSM850/Voice	Right Tilted	190	836.6	33.44	-2.00	33.5	0.031	1.014	0.031
	GSM850/Voice	Left Cheek	190	836.6	33.44	0.77	33.5	0.043	1.014	0.044
	GSM850/Voice	Left Tilted	190	836.6	33.44	-0.01	33.5	0.026	1.014	0.026
2	PCS1900/Voice	Right Cheek	661	1880	29.71	0.89	30.0	0.014	1.069	0.015
	PCS1900/Voice	Right Tilted	661	1880	29.71	-0.52	30.0	0.005	1.069	0.005
	PCS1900/Voice	Left Cheek	661	1880	29.71	-0.87	30.0	0.006	1.069	0.006
	PCS1900/Voice	Left Tilted	661	1880	29.71	-1.54	30.0	0.004	1.069	0.004
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Right Cheek	9400	1880	22.79	1.14	23.0	0.023	1.05	0.024
	Band II/RMC	Right Tilted	9400	1880	22.79	0.67	23.0	0.012	1.05	0.013
3	Band II/RMC	Left Cheek	9400	1880	22.79	-0.65	23.0	0.043	1.05	0.045
	Band II/RMC	Left Tilted	9400	1880	22.79	1.35	23.0	0.013	1.05	0.014
4	Band IV/RMC	Right Cheek	1413	1732.6	22.60	-0.63	23.0	0.043	1.096	0.047
	Band IV/RMC	Right Tilted	1413	1732.6	22.60	-1.49	23.0	0.008	1.096	0.009
	Band IV/RMC	Left Cheek	1413	1732.6	22.60	-0.62	23.0	0.027	1.096	0.030
	Band IV/RMC	Left Tilted	1413	1732.6	22.60	0.07	23.0	0.004	1.096	0.004
5	Band V/RMC	Right Cheek	4183	836.6	23.30	3.00	23.5	0.082	1.047	0.086
	Band V/RMC	Right Tilted	4183	836.6	23.30	1.96	23.5	0.039	1.047	0.041
	Band V/RMC	Left Cheek	4183	836.6	23.30	4.11	23.5	0.055	1.047	0.058
	Band V/RMC	Left Tilted	4183	836.6	23.30	0.52	23.5	0.038	1.047	0.040
A ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
6	Band7/1RB#0	Right Cheek	21350	2560	23.28	0.28	23.5	0.070	1.052	0.074
	Band7/1RB#0	Right Tilted	21350	2560	23.28	0.30	23.5	0.097	1.052	0.102
	Band7/1RB#0	Left Cheek	21350	2560	23.28	0.06	23.5	0.095	1.052	0.100
	Band7/1RB#0	Left Tilted	21350	2560	23.28	0.17	23.5	0.038	1.052	0.040
	Band7/50%RB#24	Right Cheek	21100	2535	22.25	-0.75	22.5	0.041	1.059	0.043
	Band7/50%RB#24	Right Tilted	21100	2535	22.25	0.72	22.5	0.069	1.059	0.073
	Band7/50%RB#24	Left Cheek	21100	2535	22.25	0.64	22.5	0.091	1.059	0.096
	Band7/50%RB#24	Left Tilted	21100	2535	22.25	0.85	22.5	0.066	1.059	0.070
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 25(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
7	Band25/1RB#0	Right Cheek	26365	1882.5	23.72	0.43	24.0	0.012	1.067	0.013
	Band25/1RB#0	Right Tilted	26365	1882.5	23.72	0.98	24.0	0.041	1.067	0.044
	Band25/1RB#0	Left Cheek	26365	1882.5	23.72	0.02	24.0	0.016	1.067	0.017
	Band25/1RB#0	Left Tilted	26365	1882.5	23.72	-0.49	24.0	0.024	1.067	0.026
	Band25/50%RB#0	Right Cheek	26365	1882.5	22.67	-0.82	23.0	0.018	1.079	0.019
	Band25/50%RB#0	Right Tilted	26365	1882.5	22.67	-0.33	23.0	0.033	1.079	0.036
	Band25/50%RB#0	Left Cheek	26365	1882.5	22.67	0.02	23.0	0.011	1.079	0.012
	Band25/50%RB#0	Left Tilted	26365	1882.5	22.67	-0.72	23.0	0.019	1.079	0.021
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
8	Band26/1RB#0	Right Cheek	26965	841.5	23.70	1.62	24.0	0.081	1.072	0.087
	Band26/1RB#0	Right Tilted	26965	841.5	23.70	-0.04	24.0	0.028	1.072	0.030
	Band26/1RB#0	Left Cheek	26965	841.5	23.70	0.88	24.0	0.059	1.072	0.063
	Band26/1RB#0	Left Tilted	26965	841.5	23.70	0.56	24.0	0.031	1.072	0.033
	Band26/50%RB#35	Right Cheek	26865	831.5	22.86	0.69	23.0	0.070	1.033	0.072
	Band26/50%RB#35	Right Tilted	26865	831.5	22.86	0.12	23.0	0.021	1.033	0.022
	Band26/50%RB#35	Left Cheek	26865	831.5	22.86	-2.95	23.0	0.048	1.033	0.050
	Band26/50%RB#35	Left Tilted	26865	831.5	22.86	1.71	23.0	0.013	1.033	0.013
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band41(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
9	Band41/1RB#49	Right Cheek	40620	2593	23.80	-0.32	24.0	0.743	1.047	1.008	0.784
	Band41/1RB#49	Right Tilted	40620	2593	23.80	-0.03	24.0	0.702	1.047	1.008	0.741
	Band41/1RB#49	Left Cheek	40620	2593	23.80	-2.22	24.0	0.987	1.047	1.008	1.042
	Band41/1RB#49	Left Tilted	40620	2593	23.80	0.17	24.0	0.616	1.047	1.008	0.650
	Band41/1RB#49	Left Cheek	39750	2506	23.80	-4.56	24.0	0.800	1.047	1.008	0.844
	Band41/1RB#49	Left Cheek	40185	2549.5	23.42	-0.58	24.0	0.624	1.143	1.008	0.719
	Band41/1RB#49	Left Cheek	41055	2636.5	23.55	1.97	24.0	0.667	1.109	1.008	0.746
	Band41/1RB#49	Left Cheek	41490	2680	23.25	-0.61	24.0	0.644	1.189	1.008	0.772
	Band41/1RB#49	Left Cheek	40620	2593	23.80	-0.15	24.0	0.963	1.047	1.008	1.016
	Band41/50%RB#49	Right Cheek	40620	2593	22.60	-0.78	23.0	0.597	1.096	1.008	0.660
	Band41/50%RB#49	Right Tilted	40620	2593	22.60	0.31	23.0	0.563	1.096	1.008	0.622

	Band41/50%RB#49	Left Cheek	40620	2593	22.60	-1.69	23.0	0.747	1.096	1.008	0.825
	Band41/50%RB#49	Left Tilted	40620	2593	22.60	-3.05	23.0	0.588	1.096	1.008	0.650
	Band41/100RB#0	Left Cheek	40620	2593	22.60	-0.79	23.0	0.713	1.096	1.008	0.788
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ FDD-LTE Band 66(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
10	Band66/1RB#49	Right Cheek	132072	1720	24.33	0.16	24.5	0.044	1.04	0.046
	Band66/1RB#49	Right Tilted	132072	1720	24.33	0.57	24.5	0.004	1.04	0.004
	Band66/1RB#49	Left Cheek	132072	1720	24.33	-0.07	24.5	0.009	1.04	0.009
	Band66/1RB#49	Left Tilted	132072	1720	24.33	0.84	24.5	0.006	1.04	0.006
	Band66/50%RB#49	Right Cheek	132322	1745	23.15	0.68	23.5	0.003	1.084	0.003
	Band66/50%RB#49	Right Tilted	132322	1745	23.15	-0.38	23.5	0.006	1.084	0.007
	Band66/50%RB#49	Left Cheek	132322	1745	23.15	-0.70	23.5	0.012	1.084	0.013
	Band66/50%RB#49	Left Tilted	132322	1745	23.15	1.83	23.5	0.005	1.084	0.005
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	Right Cheek	11	2462	18.85	-0.77	19.0	0.019	1.035	1.000	0.020
	2.4GHz/802.11b	Right Tilted	11	2462	18.85	-0.23	19.0	0.011	1.035	1.000	0.011
	2.4GHz/802.11b	Left Cheek	11	2462	18.85	0.41	19.0	0.024	1.035	1.000	0.025
11	2.4GHz/802.11b	Left Tilted	11	2462	18.85	-0.78	19.0	0.026	1.035	1.000	0.027
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.2 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a	Right Cheek	40	5200	17.84	0.67	17.5	0.224	0.925	1.000	0.207
	5.2GHz/802.11a	Right Tilted	40	5200	17.84	1.23	17.5	0.118	0.925	1.000	0.109
12	5.2GHz/802.11a	Left Cheek	40	5200	17.84	0.59	17.5	0.255	0.925	1.000	0.236
	5.2GHz/802.11a	Left Tilted	40	5200	17.84	0.96	17.5	0.220	0.925	1.000	0.204
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Right Cheek	165	5825	16.10	0.18	16.5	0.496	1.096	1.000	0.544
	5.8GHz/802.11a	Right Tilted	165	5825	16.10	1.35	16.5	0.336	1.096	1.000	0.368
13	5.8GHz/802.11a	Left Cheek	165	5825	16.10	0.05	16.5	0.505	1.096	1.000	0.553
	5.8GHz/802.11a	Left Tilted	165	5825	16.10	0.91	16.5	0.453	1.096	1.000	0.496
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 63.1mW(18dBm) and 79.43mW(19dBm), the scaled SAR would be $0.027 \times (63.1/79.43) = 0.021$ W/Kg < 1.2 W/kg, therefore, SAR is not required for OFDM.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

15.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/4 slots	Front	190	836.6	29.95	0.26	30.0	0.102	1.012	0.103
14	GPRS850/4 slots	Back	190	836.6	29.95	-3.81	30.0	0.117	1.012	0.118
	GPRS1900/4 slots	Front	661	1880	25.94	-0.28	26.0	0.105	1.014	0.106
15	GPRS1900/4 slots	Back	661	1880	25.94	0.30	26.0	0.314	1.014	0.318
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Front	9400	1880	22.79	-0.06	23.0	0.133	1.050	0.140
16	Band II/RMC	Back	9400	1880	22.79	-0.59	23.0	0.393	1.050	0.413
	Band IV/RMC	Front	1413	1732.6	22.60	-0.86	23.0	0.153	1.096	0.168
17	Band IV/RMC	Back	1413	1732.6	22.60	-3.29	23.0	0.238	1.096	0.261
	Band V/RMC	Front	4183	836.6	23.30	0.78	23.5	0.054	1.047	0.057
18	Band V/RMC	Back	4183	836.6	23.30	-0.41	23.5	0.064	1.047	0.067
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
19	Band7/1RB#0	Front	21350	2560	23.28	-0.33	23.5	0.494	1.052	0.520
	Band7/1RB#0	Back	21350	2560	23.28	0.68	23.5	0.336	1.052	0.353
	Band7/50%RB#24	Front	21100	2535	22.25	0.37	22.5	0.398	1.059	0.421
	Band7/50%RB#24	Back	21100	2535	22.25	-3.65	22.5	0.281	1.059	0.298
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 25(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band25/1RB#0	Front	26365	1882.5	23.72	0.83	24.0	0.210	1.067	0.224
20	Band25/1RB#0	Back	26365	1882.5	23.72	0.10	24.0	0.571	1.067	0.609
	Band25/50%RB#0	Front	26365	1882.5	22.67	0.60	23.0	0.152	1.079	0.164
	Band25/50%RB#0	Back	26365	1882.5	22.67	-0.13	23.0	0.448	1.079	0.483
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band26/1RB#0	Front	26965	841.5	23.70	0.89	24.0	0.065	1.072	0.070
21	Band26/1RB#0	Back	26965	841.5	23.70	3.48	24.0	0.075	1.072	0.080
	Band26/50%RB#35	Front	26865	831.5	22.86	-0.67	23.0	0.048	1.033	0.050
	Band26/50%RB#35	Back	26865	831.5	22.86	0.96	23.0	0.069	1.033	0.071
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 41(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
22	Band41/1RB#49	Front	40620	2593	23.80	2.08	24.0	0.482	1.047	1.008	0.509
	Band41/1RB#49	Back	40620	2593	23.80	-1.58	24.0	0.860	1.047	1.008	0.908
	Band41/1RB#49	Back	39750	2506	23.59	0.55	24.0	0.592	1.099	1.008	0.656
	Band41/1RB#49	Back	40185	2549.5	23.42	-0.42	24.0	0.531	1.143	1.008	0.612
	Band41/1RB#49	Back	41055	2636.5	23.55	1.19	24.0	0.486	1.109	1.008	0.543
	Band41/1RB#49	Back	41490	2680	23.25	0.78	24.0	0.639	1.189	1.008	0.766
	Band41/50%RB#49	Front	40620	2593	22.60	-2.15	23.0	0.386	1.096	1.008	0.426
	Band41/50%RB#49	Back	40620	2593	22.60	0.72	23.0	0.693	1.096	1.008	0.766
	Band41/100%RB#0	Back	40620	2593	22.60	0.83	23.0	0.522	1.096	1.008	0.577
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ TDD-LTE Band 66(20MHz) QPSK Body SAR

TDD-EUTRA Band 66(26MHz) 4T-MR Body SAR										
Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	Front	132072	1720	24.33	0.29	24.5	0.132	1.040	0.137
23	Band66/1RB#49	Back	132072	1720	24.33	0.64	24.5	0.321	1.040	0.334
	Band66/50%RB#49	Front	132322	1745	23.15	0.51	23.5	0.104	1.084	0.113
	Band66/50%RB#49	Back	132322	1745	23.15	0.69	23.5	0.257	1.084	0.279
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	Front	11	2462	18.85	3.97	19.0	0.012	1.035	1.000	0.012
24	2.4GHz/802.11b	Back	11	2462	18.85	0.25	19.0	0.013	1.035	1.000	0.013
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.2GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a	Front	40	5200	17.84	-0.72	17.5	0.037	0.925	1.000	0.034
25	5.2GHz/802.11a	Back	40	5200	17.84	0.91	17.5	0.072	0.925	1.000	0.067
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Front	165	5825	16.10	-0.74	16.5	0.129	1.096	1.000	0.141
26	5.8GHz/802.11a	Back	165	5825	16.10	-0.40	16.5	0.172	1.096	1.000	0.189
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

1. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
3. Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
5. Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
6. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
7. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
8. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
9. Highlight part of test data means repeated test.

15.3 Body SAR in Hotspot Mode

➤ GSM Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/4 slots	Front	190	836.6	29.95	0.26	30.0	0.102	1.012	0.103
14	GPRS850/4 slots	Back	190	836.6	29.95	-3.81	30.0	0.117	1.012	0.118
	GPRS850/4 slots	Left	190	836.6	29.95	0.44	30.0	0.055	1.012	0.056
	GPRS850/4 slots	Right	190	836.6	29.95	-0.99	30.0	0.043	1.012	0.044
	GPRS850/4 slots	Top	190	836.6	29.95	1.57	30.0	0.052	1.012	0.053
	GPRS850/4 slots	Bottom	190	836.6	29.95	0.70	30.0	0.084	1.012	0.085
	GPRS1900/4 slots	Front	661	1880	25.94	-0.28	26.0	0.105	1.014	0.106
15	GPRS1900/4 slots	Back	661	1880	25.94	0.30	26.0	0.314	1.014	0.318
	GPRS1900/4 slots	Left	661	1880	25.94	-0.54	26.0	0.033	1.014	0.033
	GPRS1900/4 slots	Right	661	1880	25.94	0.59	26.0	0.031	1.014	0.031
	GPRS1900/4 slots	Top	661	1880	25.94	-1.38	26.0	0.029	1.014	0.029
	GPRS1900/4 slots	Bottom	661	1880	25.94	0.57	26.0	0.311	1.014	0.315
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Front	9400	1880	22.79	-0.06	23.0	0.133	1.050	0.140
	Band II/RMC	Back	9400	1880	22.79	-0.59	23.0	0.393	1.050	0.413
	Band II/RMC	Left	9400	1880	22.79	-1.08	23.0	0.123	1.050	0.129
	Band II/RMC	Right	9400	1880	22.79	0.44	23.0	0.116	1.050	0.122
	Band II/RMC	Top	9400	1880	22.79	-0.39	23.0	0.119	1.050	0.125
27	Band II/RMC	Bottom	9400	1880	22.79	2.67	23.0	0.412	1.050	0.433
	Band IV/RMC	Front	1413	1732.6	22.60	-0.86	23.0	0.153	1.096	0.168
	Band IV/RMC	Back	1413	1732.6	22.60	-3.29	23.0	0.238	1.096	0.261
	Band IV/RMC	Left	1413	1732.6	22.60	-0.94	23.0	0.113	1.096	0.124
	Band IV/RMC	Right	1413	1732.6	22.60	-0.21	23.0	0.113	1.096	0.124
	Band IV/RMC	Top	1413	1732.6	22.60	-1.63	23.0	0.098	1.096	0.107
28	Band IV/RMC	Bottom	1413	1732.6	22.60	0.72	23.0	0.343	1.096	0.376
	Band V/RMC	Front	4183	836.6	23.30	0.78	23.5	0.054	1.047	0.057
18	Band V/RMC	Back	4183	836.6	23.30	-0.41	23.5	0.064	1.047	0.067
	Band V/RMC	Left	4183	836.6	23.30	-1.13	23.5	0.032	1.047	0.034
	Band V/RMC	Right	4183	836.6	23.30	-1.66	23.5	0.029	1.047	0.030
	Band V/RMC	Top	4183	836.6	23.30	-0.75	23.5	0.022	1.047	0.023
	Band V/RMC	Bottom	4183	836.6	23.30	1.01	23.5	0.056	1.047	0.059
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
19	Band7/1RB#0	Front	21350	2560	23.28	-0.33	23.5	0.494	1.052	0.520
	Band7/1RB#0	Back	21350	2560	23.28	0.68	23.5	0.336	1.052	0.353
	Band7/1RB#0	Left	21350	2560	23.28	0.89	23.5	0.439	1.052	0.462
	Band7/1RB#0	Right	21350	2560	23.28	-1.49	23.5	0.320	1.052	0.337
	Band7/1RB#0	Top	21350	2560	23.28	0.08	23.5	0.106	1.052	0.112
	Band7/1RB#0	Bottom	21350	2560	23.28	-0.95	23.5	0.348	1.052	0.366
	Band7/50%RB#24	Front	21100	2535	22.25	0.37	22.5	0.398	1.059	0.421
	Band7/50%RB#24	Back	21100	2535	22.25	-3.65	22.5	0.281	1.059	0.298
	Band7/50%RB#24	Left	21100	2535	22.25	1.57	22.5	0.320	1.059	0.339
	Band7/50%RB#24	Right	21100	2535	22.25	-1.12	22.5	0.235	1.059	0.249
	Band7/50%RB#24	Top	21100	2535	22.25	0.88	22.5	0.092	1.059	0.097
	Band7/50%RB#24	Bottom	21100	2535	22.25	4.98	22.5	0.275	1.059	0.291
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 25(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band25/1RB#0	Front	26365	1882.5	23.72	0.83	24.0	0.210	1.067	0.224
20	Band25/1RB#0	Back	26365	1882.5	23.72	0.10	24.0	0.571	1.067	0.609
	Band25/1RB#0	Left	26365	1882.5	23.72	-0.33	24.0	0.057	1.067	0.061
	Band25/1RB#0	Right	26365	1882.5	23.72	-1.04	24.0	0.087	1.067	0.093
	Band25/1RB#0	Top	26365	1882.5	23.72	-1.77	24.0	0.066	1.067	0.070
	Band25/1RB#0	Bottom	26365	1882.5	23.72	0.95	24.0	0.564	1.067	0.602
	Band25/50%RB#0	Front	26365	1882.5	22.67	0.60	23.0	0.152	1.079	0.164
	Band25/50%RB#0	Back	26365	1882.5	22.67	-0.13	23.0	0.448	1.079	0.483
	Band25/50%RB#0	Left	26365	1882.5	22.67	0.69	23.0	0.066	1.079	0.071
	Band25/50%RB#0	Right	26365	1882.5	22.67	0.55	23.0	0.059	1.079	0.064
	Band25/50%RB#0	Top	26365	1882.5	22.67	-2.00	23.0	0.115	1.079	0.124
	Band25/50%RB#0	Bottom	26365	1882.5	22.67	-0.45	23.0	0.419	1.079	0.452
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band26/1RB#0	Front	26965	841.5	23.70	0.89	24.0	0.065	1.072	0.070
21	Band26/1RB#0	Back	26965	841.5	23.70	3.48	24.0	0.075	1.072	0.080
	Band26/1RB#0	Left	26965	841.5	23.70	-0.79	24.0	0.030	1.072	0.032
	Band26/1RB#0	Right	26965	841.5	23.70	1.70	24.0	0.013	1.072	0.014
	Band26/1RB#0	Top	26965	841.5	23.70	-1.12	24.0	0.031	1.072	0.033
	Band26/1RB#0	Bottom	26965	841.5	23.70	-0.27	24.0	0.063	1.072	0.068
	Band26/50%RB#35	Front	26865	831.5	22.86	-0.67	23.0	0.048	1.033	0.050
	Band26/50%RB#35	Back	26865	831.5	22.86	0.96	23.0	0.069	1.033	0.071
	Band26/50%RB#35	Left	26865	831.5	22.86	0.89	23.0	0.021	1.033	0.022
	Band26/50%RB#35	Right	26865	831.5	22.86	-0.70	23.0	0.013	1.033	0.013
	Band26/50%RB#35	Top	26865	831.5	22.86	-0.23	23.0	0.019	1.033	0.020
	Band26/50%RB#35	Bottom	26865	831.5	22.86	-0.06	23.0	0.041	1.033	0.042
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Front	40620	2593	23.80	2.08	24.0	0.482	1.047	1.008	0.509
	Band41/1RB#49	Back	40620	2593	23.80	-1.58	24.0	0.860	1.047	1.008	0.908
29	Band41/1RB#49	Left	40620	2593	23.80	-0.06	24.0	0.967	1.047	1.008	1.021
	Band41/1RB#49	Top	40620	2593	23.80	0.78	24.0	0.122	1.047	1.008	0.129
	Band41/1RB#49	Back	39750	2506	23.59	0.55	24.0	0.592	1.099	1.008	0.656
	Band41/1RB#49	Back	40185	2549.5	23.42	-0.42	24.0	0.531	1.143	1.008	0.612
	Band41/1RB#49	Back	41055	2636.5	23.55	1.19	24.0	0.486	1.109	1.008	0.543
	Band41/1RB#49	Back	41490	2680	23.25	0.78	24.0	0.639	1.189	1.008	0.766
	Band41/1RB#49	Left	39750	2506	23.59	0.98	24.0	0.740	1.099	1.008	0.820
	Band41/1RB#49	Left	40185	2549.5	23.42	-1.59	24.0	0.711	1.143	1.008	0.819
	Band41/1RB#49	Left	41055	2636.5	23.55	0.90	24.0	0.683	1.109	1.008	0.764
	Band41/1RB#49	Left	41490	2680	23.25	2.40	24.0	0.661	1.189	1.008	0.792
	Band41/50%RB#49	Front	40620	2593	22.60	-2.15	23.0	0.386	1.096	1.008	0.426
	Band41/50%RB#49	Back	40620	2593	22.60	0.72	23.0	0.693	1.096	1.008	0.766
	Band41/50%RB#49	Left	40620	2593	22.60	3.01	23.0	0.775	1.096	1.008	0.856
	Band41/50%RB#49	Top	40620	2593	22.60	-0.07	23.0	0.099	1.096	1.008	0.109
	Band41/50%RB#49	Left	39750	2506	22.42	1.22	23.0	0.711	1.143	1.008	0.819
	Band41/50%RB#49	Left	40185	2549.5	22.30	1.93	23.0	0.702	1.175	1.008	0.831
	Band41/50%RB#49	Left	41055	2636.5	22.40	-1.05	23.0	0.622	1.148	1.008	0.720
	Band41/50%RB#49	Left	41490	2680	22.18	0.80	23.0	0.612	1.208	1.008	0.745
	Band41/100RB#0	Back	40620	2593	22.60	0.83	23.0	0.522	1.096	1.008	0.577
	Band41/100RB#0	Left	40620	2593	22.60	-1.78	23.0	0.628	1.096	1.008	0.694
ANSI / IEEE C95.1 – SAFETY LIMIT					1.6 W/kg (mW/g)						
Spatial Peak					Averaged over 1g						
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	Front	132072	1720	24.33	0.29	24.5	0.132	1.040	0.137
	Band66/1RB#49	Back	132072	1720	24.33	0.64	24.5	0.321	1.040	0.334
	Band66/1RB#49	Left	132072	1720	24.33	-0.78	24.5	0.071	1.040	0.074
	Band66/1RB#49	Right	132072	1720	24.33	-0.63	24.5	0.088	1.040	0.092
	Band66/1RB#49	Top	132072	1720	24.33	0.31	24.5	0.109	1.040	0.113
30	Band66/1RB#49	Bottom	132072	1720	24.33	0.44	24.5	0.368	1.040	0.383
	Band66/50%RB#49	Front	132322	1745	23.15	0.51	23.5	0.104	1.084	0.113
	Band66/50%RB#49	Back	132322	1745	23.15	0.69	23.5	0.257	1.084	0.279
	Band66/50%RB#49	Left	132322	1745	23.15	0.24	23.5	0.038	1.084	0.041
	Band66/50%RB#49	Right	132322	1745	23.15	-1.96	23.5	0.033	1.084	0.036
	Band66/50%RB#49	Top	132322	1745	23.15	0.05	23.5	0.096	1.084	0.104
	Band66/50%RB#49	Bottom	132322	1745	23.15	-0.37	23.5	0.287	1.084	0.311
ANSI / IEEE C95.1 – SAFETY LIMIT					1.6 W/kg (mW/g)					
Spatial Peak					Averaged over 1g					
Uncontrolled Exposure/General Population										

➤ WLAN 2.4GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	Front	11	2462	18.85	3.97	19.0	0.012	1.035	1.000	0.012
	2.4GHz/802.11b	Back	11	2462	18.85	0.25	19.0	0.013	1.035	1.000	0.013
	2.4GHz/802.11b	Left	11	2462	18.85	-0.11	19.0	0.009	1.035	1.000	0.009
	2.4GHz/802.11b	Right	11	2462	18.85	0.23	19.0	0.011	1.035	1.000	0.011
31	2.4GHz/802.11b	Top	11	2462	18.85	0.98	19.0	0.015	1.035	1.000	0.016
	2.4GHz/802.11b	Bottom	11	2462	18.85	1.48	19.0	0.010	1.035	1.000	0.010
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.2GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a	Front	40	5200	17.84	-0.72	17.5	0.037	0.925	1.000	0.034
25	5.2GHz/802.11a	Back	40	5200	17.84	0.91	17.5	0.072	0.925	1.000	0.067
	5.2GHz/802.11a	Left	40	5200	17.84	1.45	17.5	0.031	0.925	1.000	0.029
	5.2GHz/802.11a	Right	40	5200	17.84	0.78	17.5	0.056	0.925	1.000	0.052
	5.2GHz/802.11a	Top	40	5200	17.84	0.22	17.5	0.044	0.925	1.000	0.041
	5.2GHz/802.11a	Bottom	40	5200	17.84	-1.13	17.5	0.032	0.925	1.000	0.030
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	Front	165	5825	16.10	-0.74	16.5	0.129	1.096	1.000	0.141
26	5.8GHz/802.11a	Back	165	5825	16.10	-0.40	16.5	0.172	1.096	1.000	0.189
	5.8GHz/802.11a	Left	165	5825	16.10	-0.90	16.5	0.062	1.096	1.000	0.068
	5.8GHz/802.11a	Right	165	5825	16.10	0.93	16.5	0.060	1.096	1.000	0.066
	5.8GHz/802.11a	Top	165	5825	16.10	4.80	16.5	0.081	1.096	1.000	0.089
	5.8GHz/802.11a	Bottom	165	5825	16.10	1.41	16.5	0.035	1.096	1.000	0.038
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Additional WLAN SAR testing was performed for simultaneous transmission analysis.
- For Hotspot SAR testing, per KDB 941225 D06v02r01, for EUT dimension ≥ 9cm*5cm, the test distance is 10mm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is < 0.25dB higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA SAR evaluation can be excluded.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg.
- Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.

15.4 Repeated SAR measurement

Band/ Mode	Test Position	CH.	Freq. (MHz)	Measured SAR (W/kg)				
				Original	1 st Repeated		2 nd Repeated	
					Value	Ratio	Value	Ratio
Band41/LTE	Left Cheek	40620	2593	0.987	0.963	1.02	/	/
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1g				

Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r04, if the ratio of *original* and *repeated* is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

15.5 Multi-Band Simultaneous Transmission Considerations

➤ Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

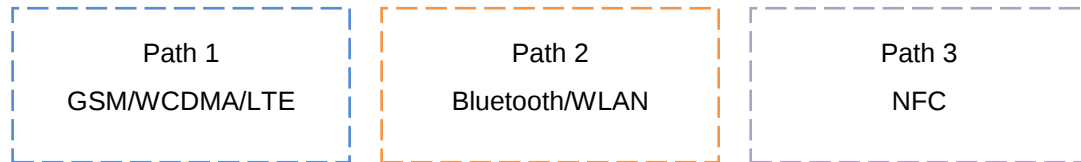


Fig.15.1 Simultaneous Transmission Paths

➤ Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} \cdot \frac{\text{Max power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Head	Body	Hotspot
		Test Distance (mm)	0	10	10
Bluetooth	8	Estimated SAR (W/kg)	0.264	0.132	0.132
NFC	-59	Estimated SAR (W/kg)	0	0	0

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.

➤ Multi-Band simultaneous Transmission Consideration

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	WWAN (Voice) + WLAN 2.4 GHz/5.2GHz/5.8GHz+NFC
		WWAN (Voice) + Bluetooth + NFC
	Body	WWAN (Voice) + WLAN 2.4 GHz/5.2GHz/5.8GHz+NFC
		WWAN (Voice) + Bluetooth + NFC
	Hotspot	WWAN (Data) + WLAN 2.4 GHz/5.2GHz/5.8GHz+NFC
		WWAN (Data) + Bluetooth + NFC

Note:

- WLAN 2.4GHz Band, WLAN 5.2GHz Band, WLAN 5.8GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

15.6 SAR Simultaneous Transmission Analysis

➤ Simultaneous Transmission

➤

Position		Standalone SAR(W/kg)					? SAR _{1g} (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
		WWAN	2.4G WLAN	5G WLAN	BT	NFC			
Head	Right Cheek	0.784	0.020	0.544	0.264	0	0.804	1.328	1.048
	Right Tilted	0.741	0.011	0.368	0.264	0	0.752	1.109	1.005
	Left Cheek	1.042	0.025	0.553	0.264	0	1.067	1.595	1.306
	Left Tilted	0.650	0.027	0.496	0.264	0	0.677	1.146	0.914
Body-worn	Front	0.520	0.012	0.141	0.132	0	0.532	0.661	0.652
	Back	0.908	0.013	0.189	0.132	0	0.921	1.097	1.04
Hotspot	Front	0.520	0.012	0.141	0.132	0	0.532	0.661	0.652
	Back	0.908	0.013	0.189	0.132	0	0.921	1.097	1.04
	Left	1.021	0.009	0.068	0.132	0	1.03	1.089	1.153
	Right	0.587	0.011	0.066	0.132	0	0.598	0.653	0.719
	Top	0.129	0.016	0.089	0.132	0	0.145	0.218	0.261
	Bottom	0.602	0.010	0.038	0.132	0	0.612	0.64	0.734

➤ Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

15.7 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528: 2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. [3]. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4]. OpenSAR V5 Software User Manual
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D01 v06, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, October 2015
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMNT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 941225 D06 v02r01, “ SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [11]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

System check at 835 MHz

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.684357
Conductivity (S/m)	0.942057

C. SAR Surface and Volume

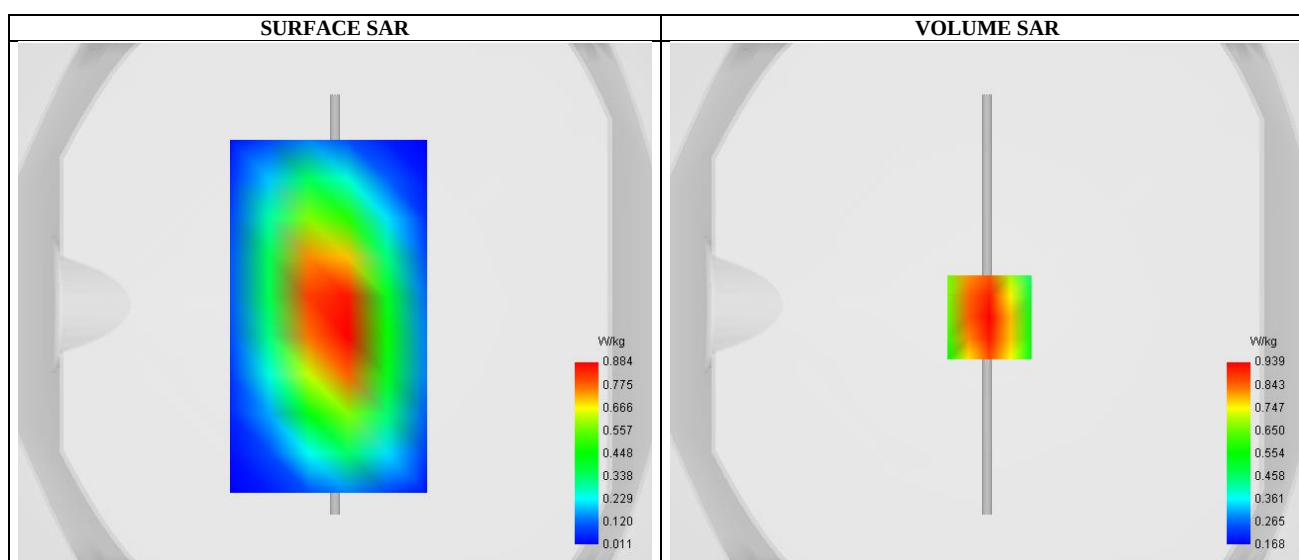


Maximum location: X=1.00, Y=-5.00 ; SAR Peak: 1.25 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.601458
SAR 1g (W/Kg)	0.895417
Variation (%)	-0.040000

E. Z Axis Scan

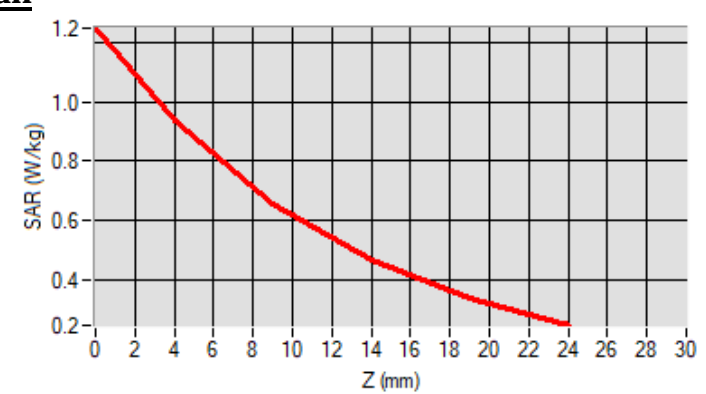

System check at 1750 MHz

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1750.000000
Relative permittivity (real part)	40.511784
Conductivity (S/m)	1.320348

C. SAR Surface and Volume

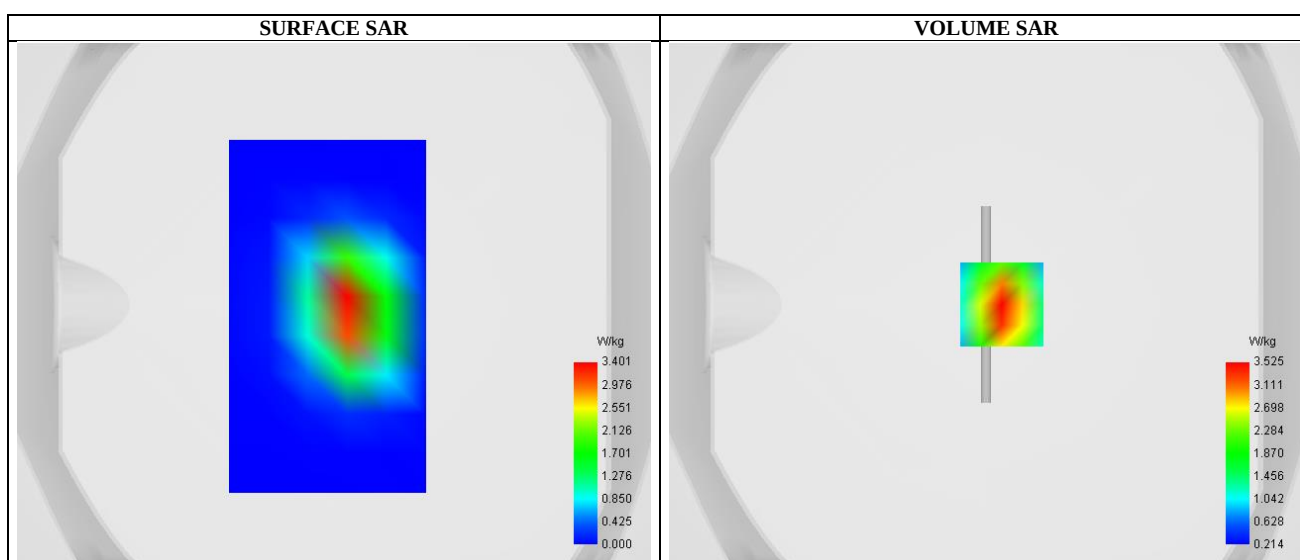


Maximum location: X=6.00, Y=0.00 ; SAR Peak: 5.24 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.828368
SAR 1g (W/Kg)	3.282091
Variation (%)	4.120000

E. Z Axis Scan

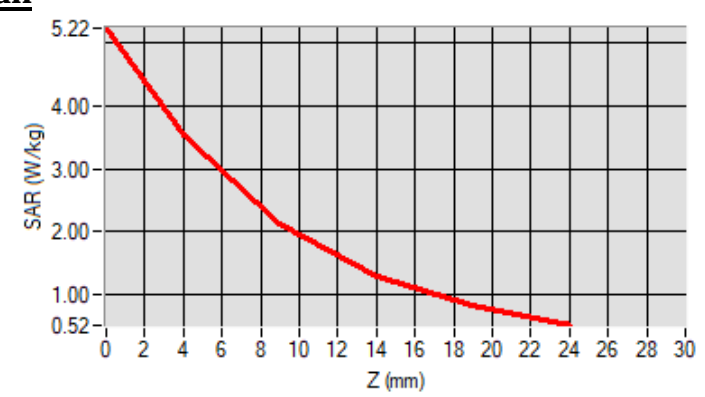

System check at 1900 MHz

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.230421
Conductivity (S/m)	1.433094

C. SAR Surface and Volume

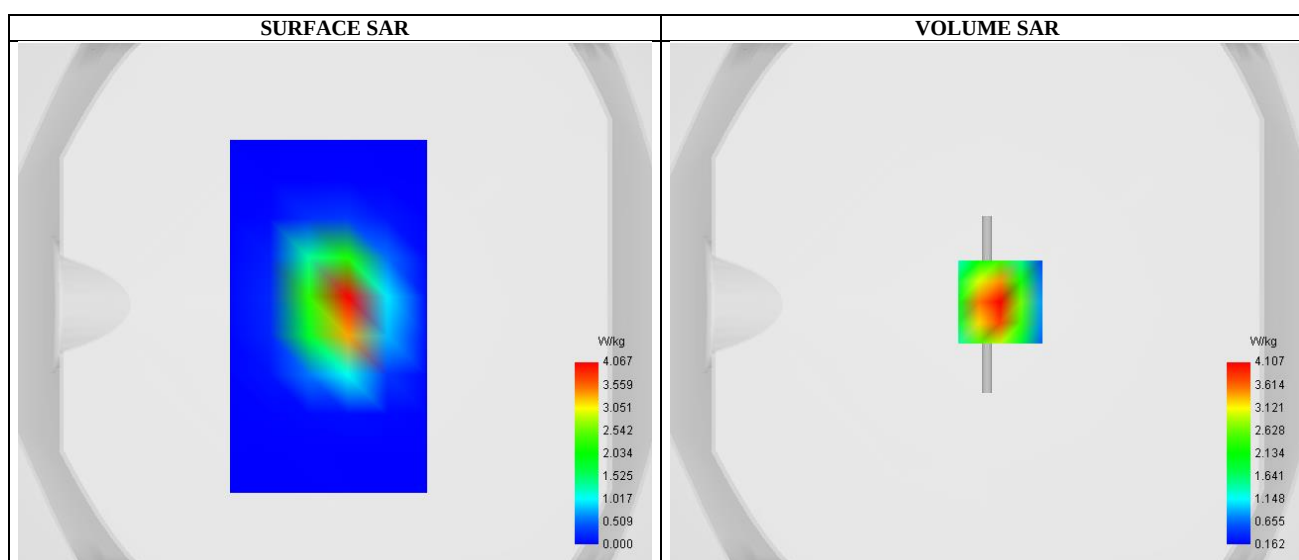


Maximum location: X=5.00, Y=1.00 ; SAR Peak: 6.35 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.066745
SAR 1g (W/Kg)	3.852140
Variation (%)	2.980000

E. Z Axis Scan

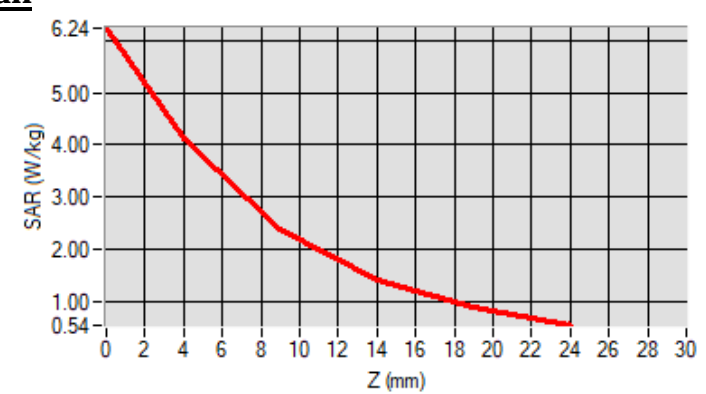

System check at 2450 MHz

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.311507
Conductivity (S/m)	1.742816

C. SAR Surface and Volume

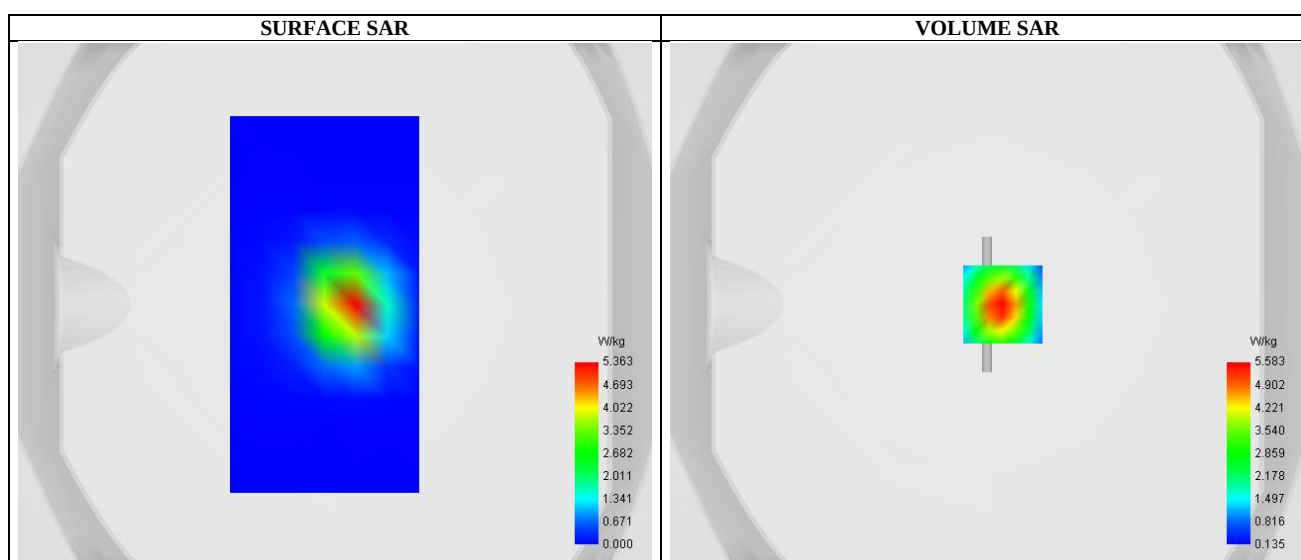


Maximum location: X=6.00, Y=0.00 ; SAR Peak: 9.00 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.445671
SAR 1g (W/Kg)	5.005699
Variation (%)	0.570000

E. Z Axis Scan

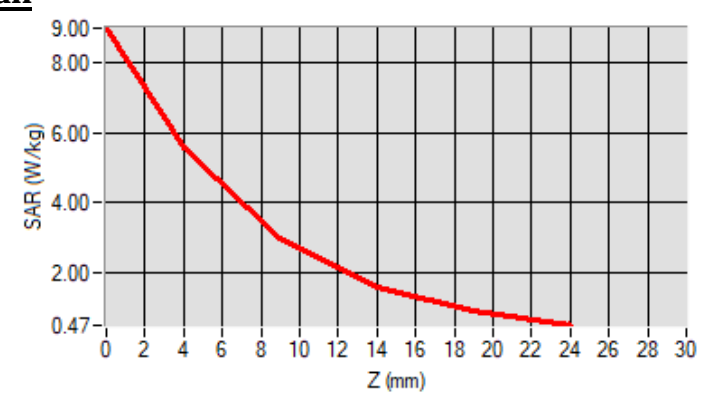

System check at 2600 MHz

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	High
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000000
Relative permittivity (real part)	40.662587
Conductivity (S/m)	1.871246

C. SAR Surface and Volume

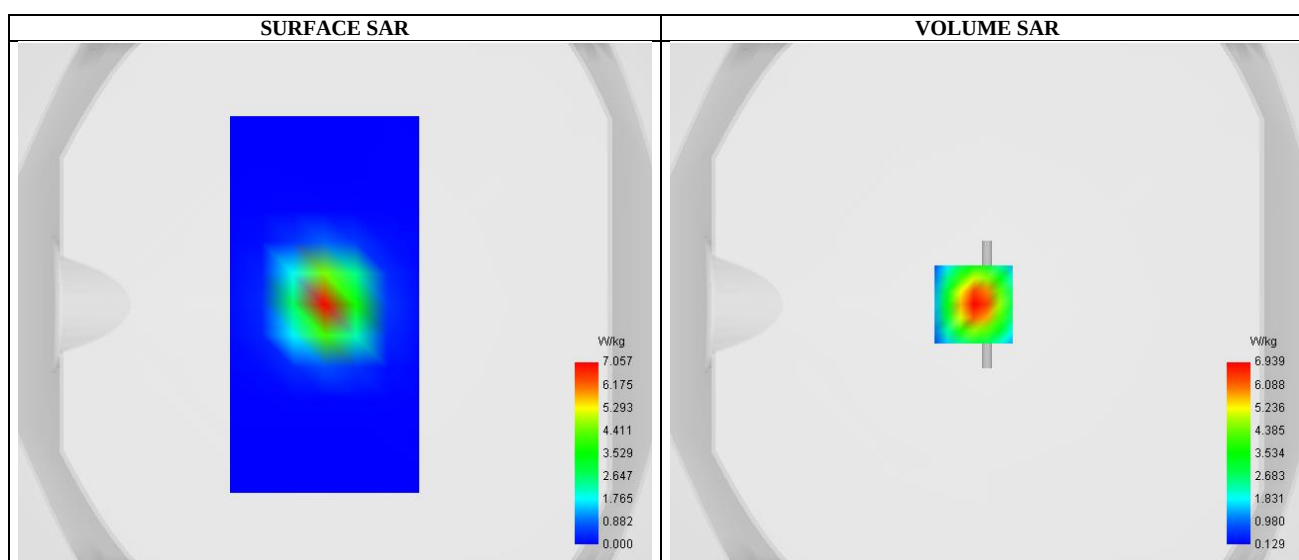


Maximum location: X=-5.00, Y=0.00 ; SAR Peak: 11.38 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.623313
SAR 1g (W/Kg)	6.031099
Variation (%)	-2.480000

E. Z Axis Scan

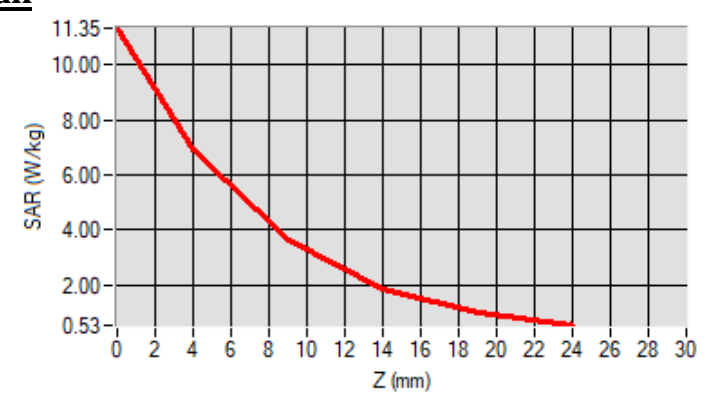

System check at 5200 MHz

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.55
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	High
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000000
Relative permittivity (real part)	36.481384
Conductivity (S/m)	4.861347

C. SAR Surface and Volume

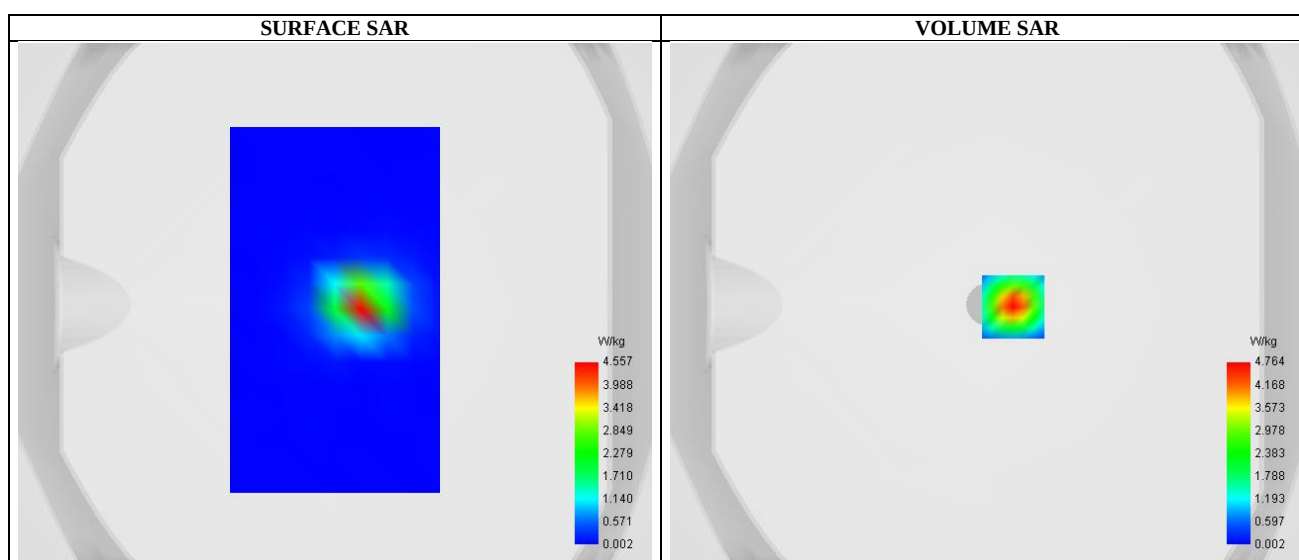


Maximum location: X=10.00, Y=-1.00 ; SAR Peak: 8.31 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.924245
SAR 1g (W/Kg)	2.829270
Variation (%)	0.800000

E. Z Axis Scan

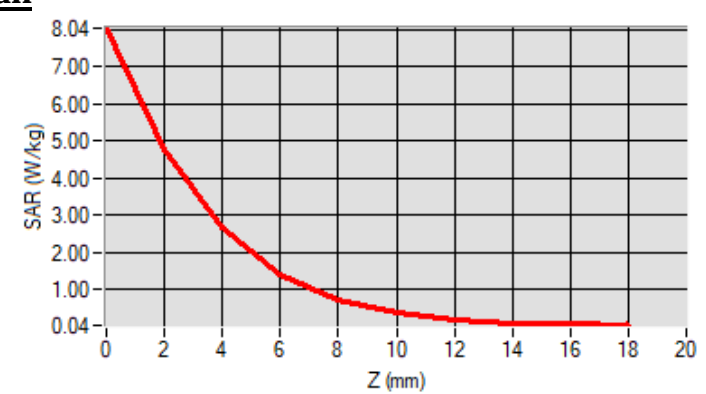

System check at 5800 MHz

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.35
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	High
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5800.000000
Relative permittivity (real part)	35.781356
Conductivity (S/m)	5.534176

C. SAR Surface and Volume

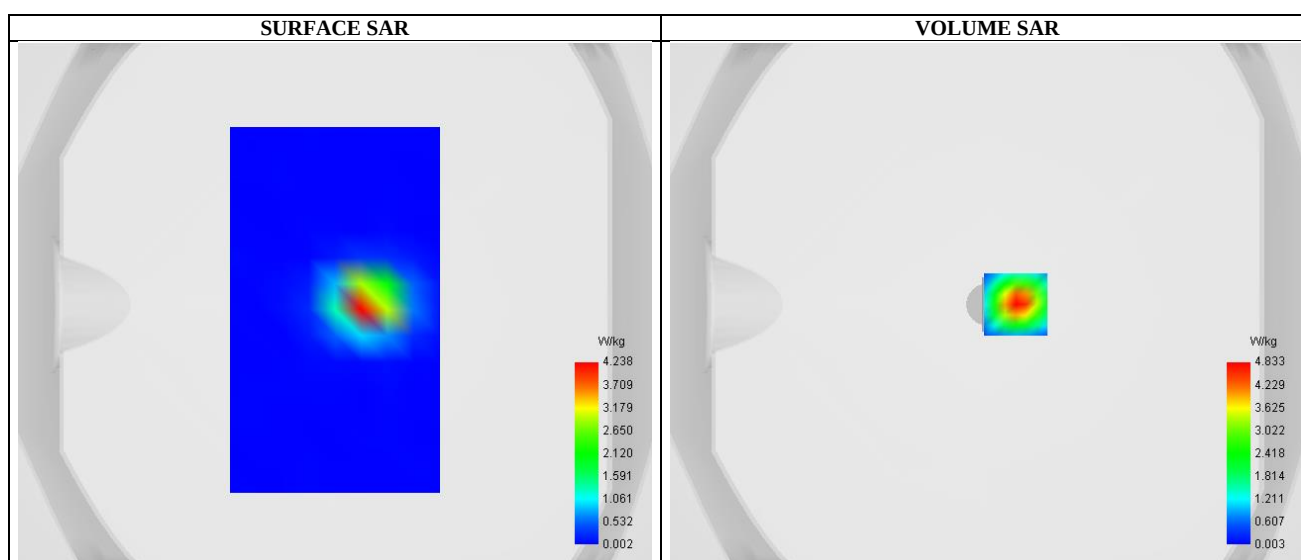


Maximum location: X=11.00, Y=0.00 ; SAR Peak: 8.93 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.876424
SAR 1g (W/Kg)	2.915070
Variation (%)	-3.390000

E. Z Axis Scan

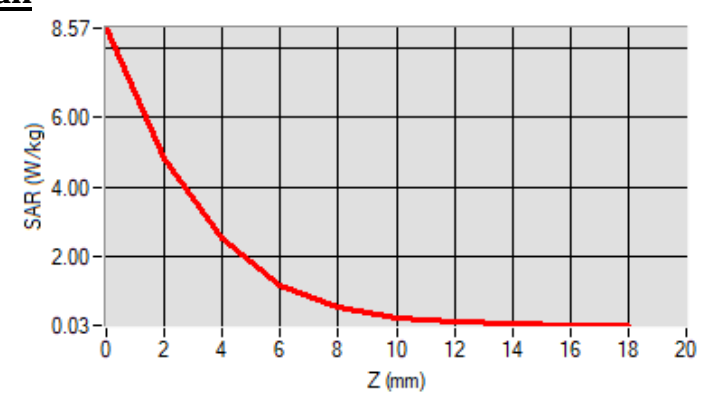

Appendix B: Plots of SAR Test Data

SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.683172
Conductivity (S/m)	0.940683

C. SAR Surface and Volume

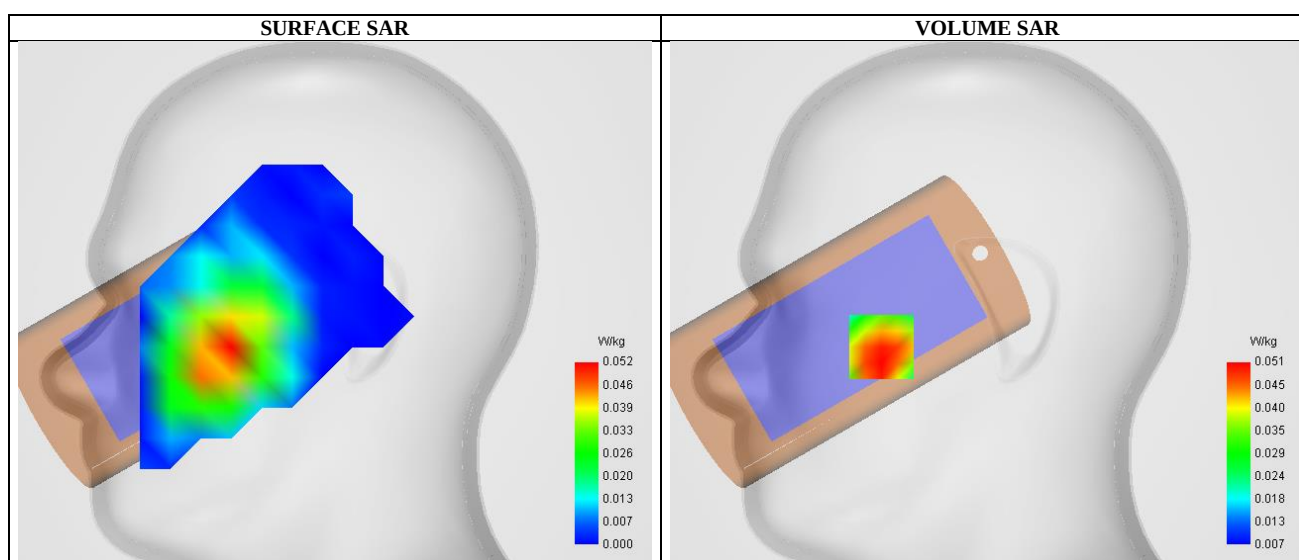


Maximum location: X=-52.00, Y=-21.00 ; SAR Peak: 0.08 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.033194
SAR 1g (W/Kg)	0.049570
Variation (%)	0.650000

E. Z Axis Scan

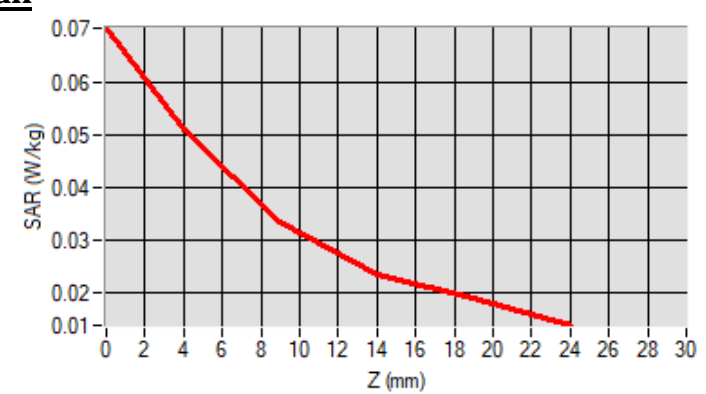

SAR Measurement at GSM1900 (Cheek, Right)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.230587
Conductivity (S/m)	1.434185

C. SAR Surface and Volume

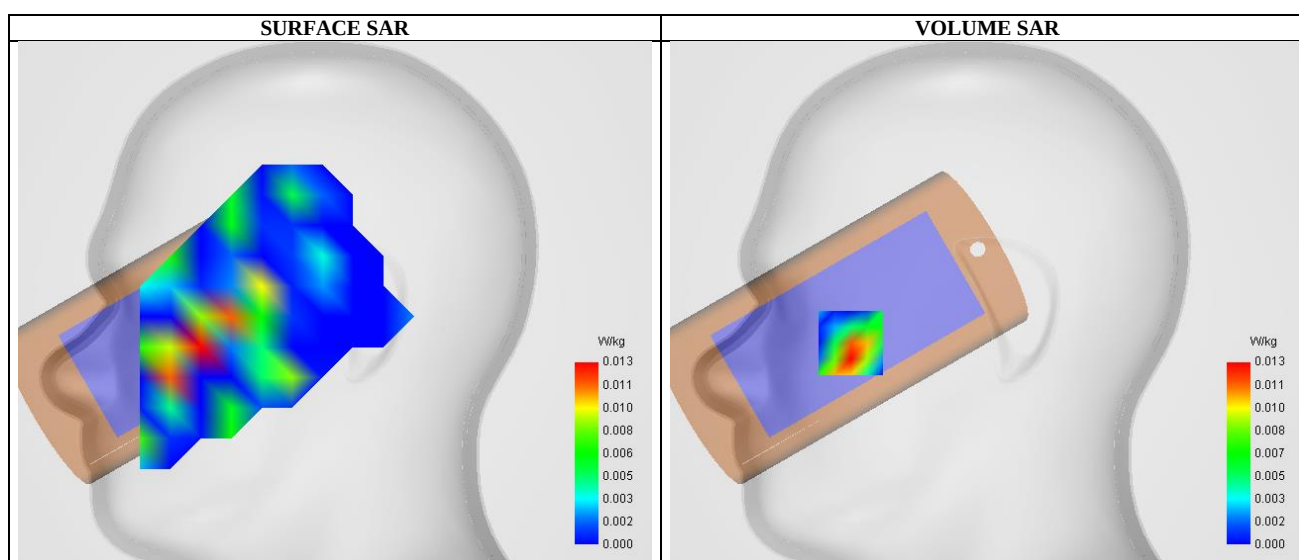


Maximum location: X=-67.00, Y=-19.00 ; SAR Peak: 0.04 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.006583
SAR 1g (W/Kg)	0.014024
Variation (%)	0.889999

E. Z Axis Scan

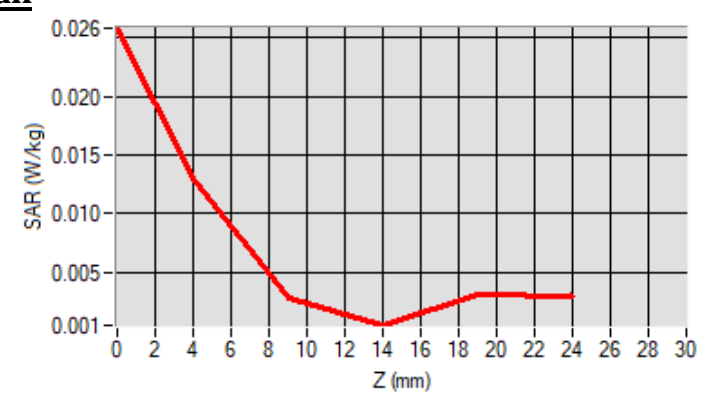

SAR Measurement at Band2_WCDMA1900 (Cheek, Left)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.230587
Conductivity (S/m)	1.434185

C. SAR Surface and Volume

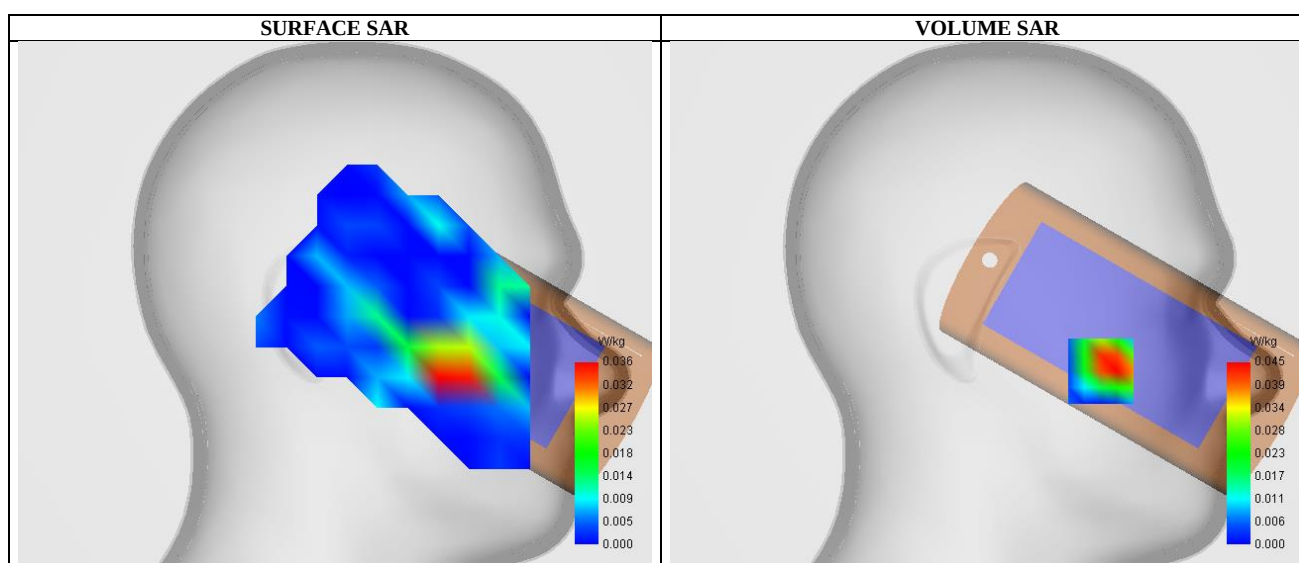


Maximum location: X=-56.00, Y=-33.00 ; SAR Peak: 0.07 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.022314
SAR 1g (W/Kg)	0.043474
Variation (%)	-0.650002

E. Z Axis Scan

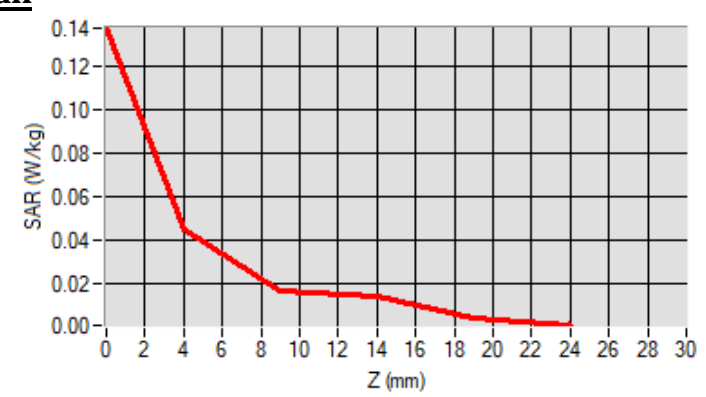

SAR Measurement at CUSTOM (WCDMA_1700) (Cheek, Right)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	WCDMA_1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	40.523749
Conductivity (S/m)	1.310751

C. SAR Surface and Volume

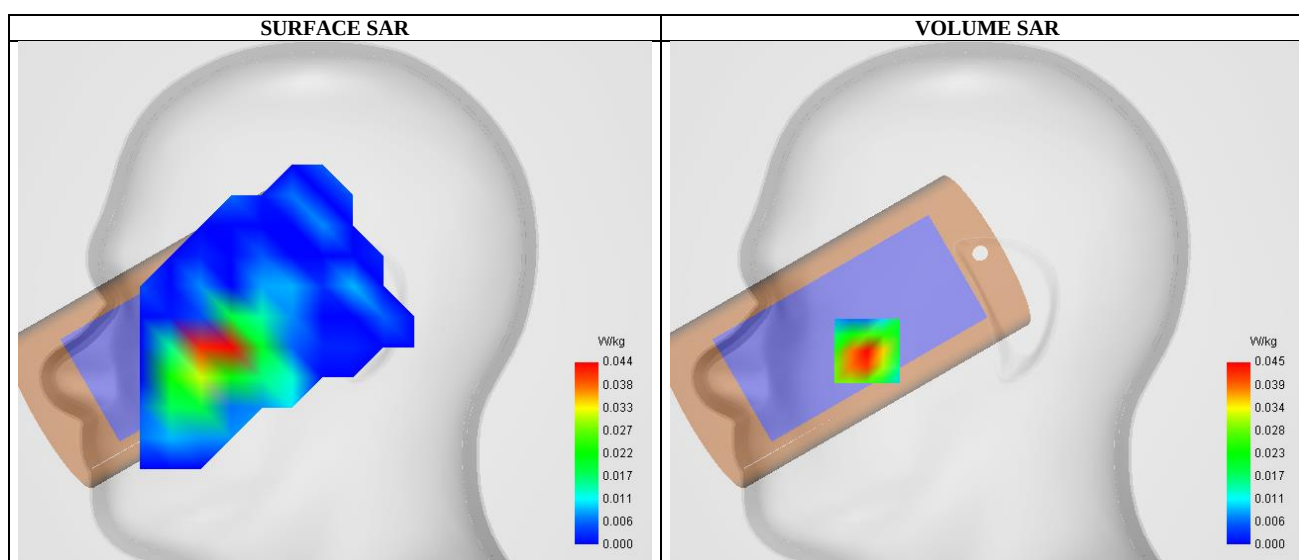


Maximum location: X=-59.00, Y=-23.00 ; SAR Peak: 0.06 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.026120
SAR 1g (W/Kg)	0.042990
Variation (%)	-0.630001

E. Z Axis Scan

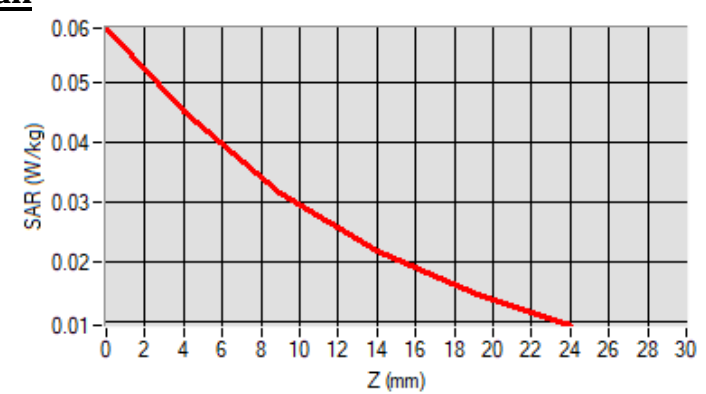

SAR Measurement at Band5_WCDMA850 (Cheek, Right)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.673807
Conductivity (S/m)	0.956184

C. SAR Surface and Volume

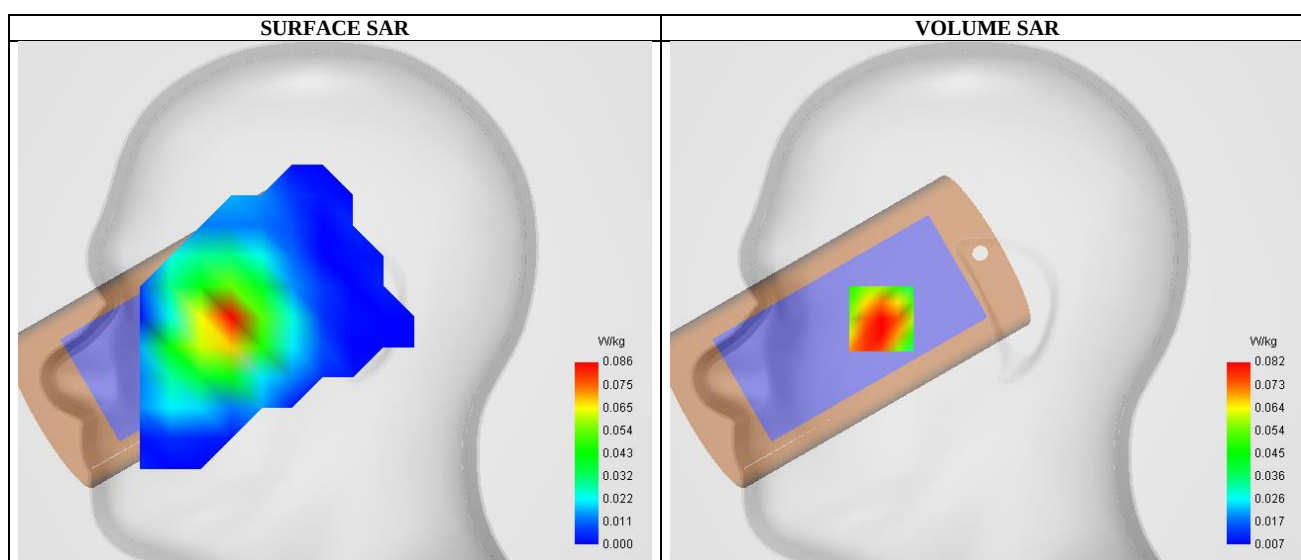


Maximum location: X=-52.00, Y=-7.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.057029
SAR 1g (W/Kg)	0.081661
Variation (%)	3.000000

E. Z Axis Scan

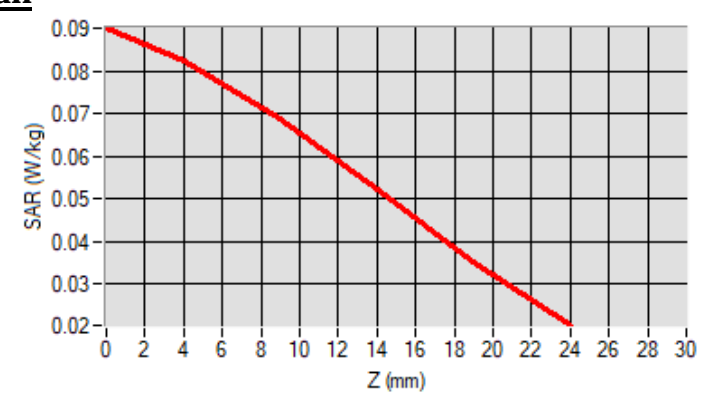

SAR Measurement at LTE band 7 (Tilt, Right)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 7
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2560.000000
Relative permittivity (real part)	40.653801
Conductivity (S/m)	1.885762

C. SAR Surface and Volume

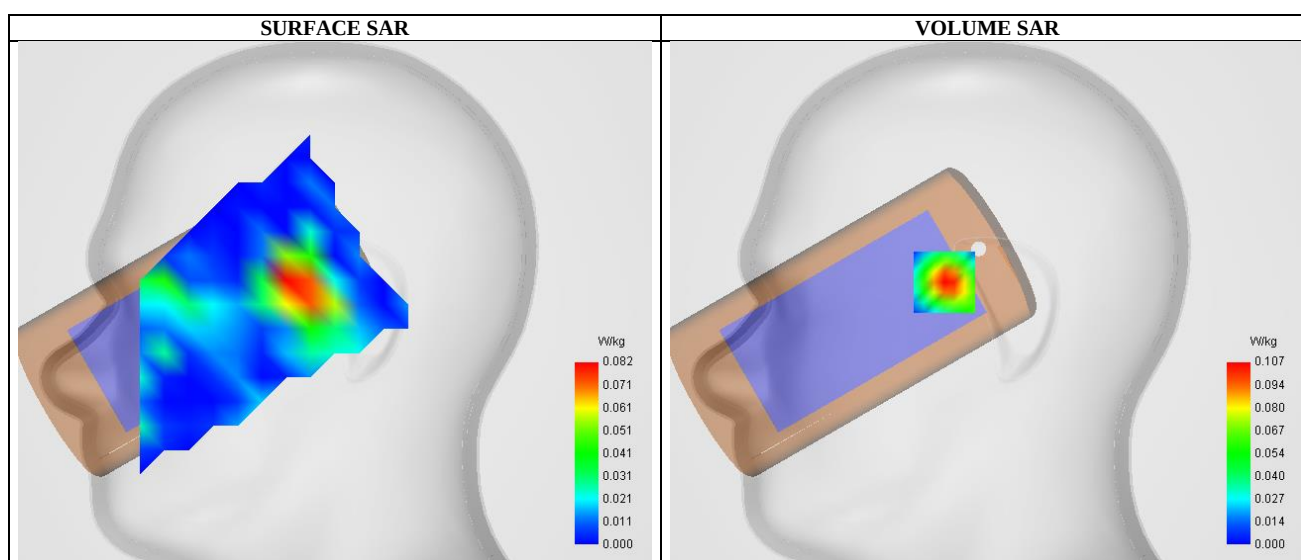


Maximum location: X=-21.00, Y=11.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.047360
SAR 1g (W/Kg)	0.096703
Variation (%)	0.300000

E. Z Axis Scan

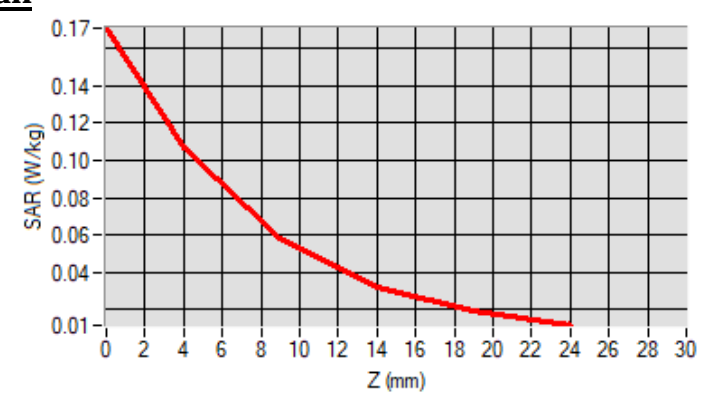

SAR Measurement at LTE band 25 (Tilt, Right)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Tilt
Band	LTE band 25
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1882.500000
Relative permittivity (real part)	40.244817
Conductivity (S/m)	1.423731

C. SAR Surface and Volume

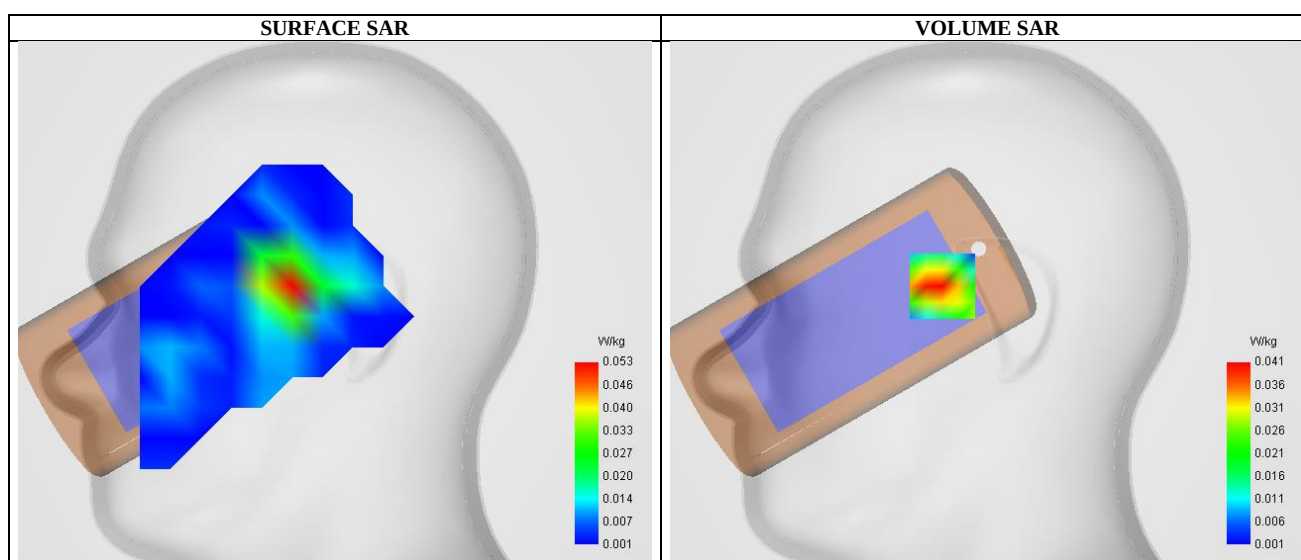


Maximum location: X=-22.00, Y=9.00 ; SAR Peak: 0.07 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.024148
SAR 1g (W/Kg)	0.040627
Variation (%)	0.980000

E. Z Axis Scan

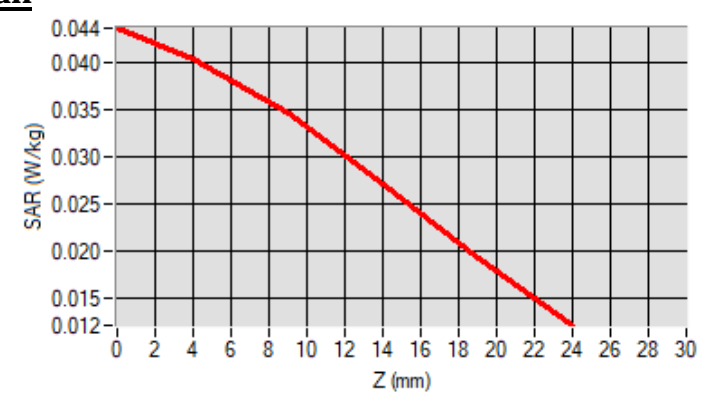

SAR Measurement at CUSTOM (LTE Band 26) (Cheek, Right)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE_Band_26
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	841.500000
Relative permittivity (real part)	41.670628
Conductivity (S/m)	0.951357

C. SAR Surface and Volume

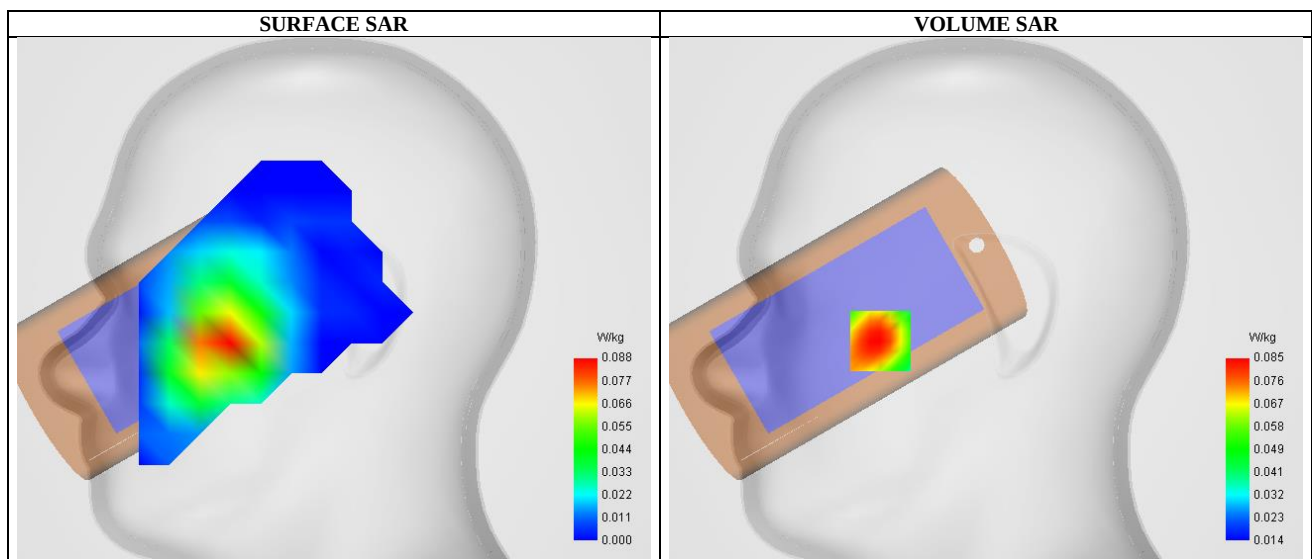


Maximum location: X=-52.00, Y=-20.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.058087
SAR 1g (W/Kg)	0.080933
Variation (%)	1.620000

E. Z Axis Scan

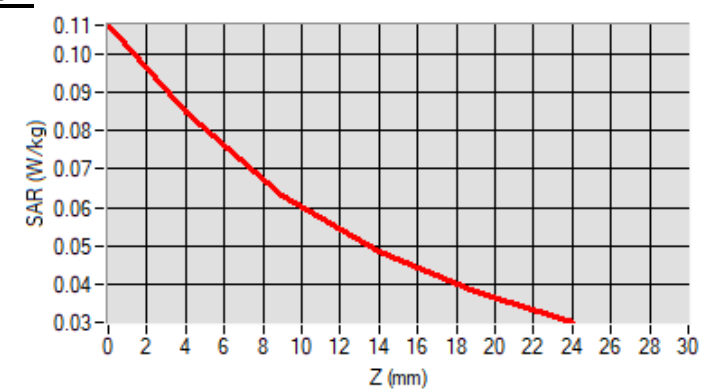

SAR Measurement at LTE band 41 (Cheek, Left)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2593.000000
Relative permittivity (real part)	40.672934
Conductivity (S/m)	1.862094

C. SAR Surface and Volume

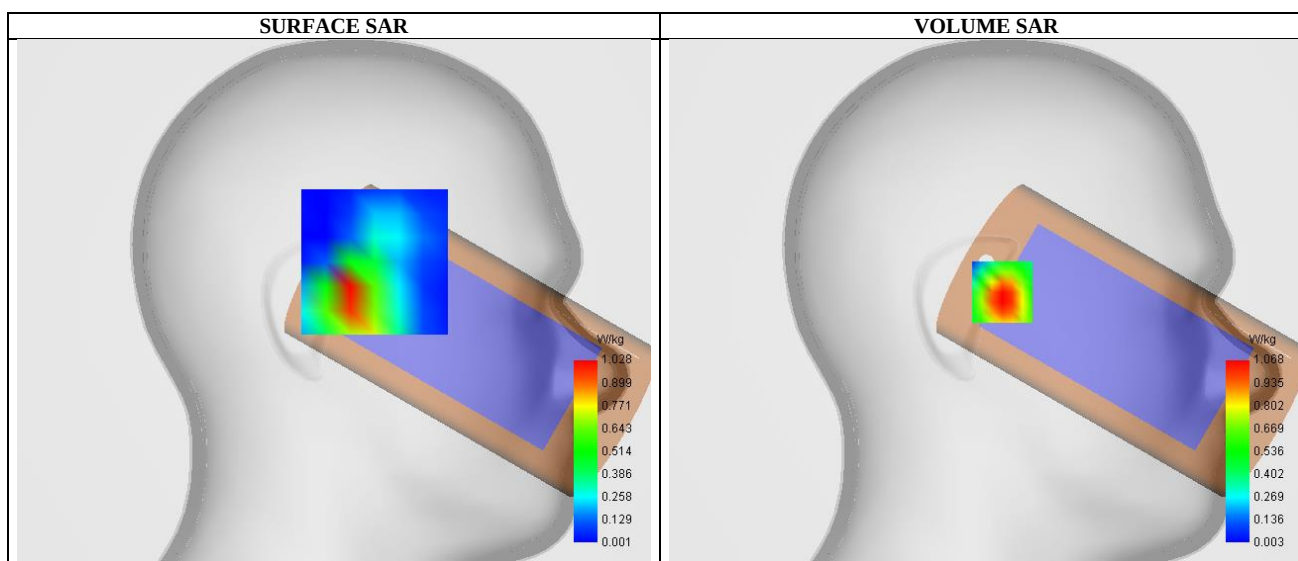


Maximum location: X=-8.00, Y=5.00 ; SAR Peak: 1.66 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.523312
SAR 1g (W/Kg)	0.986510
Variation (%)	-2.220000

E. Z Axis Scan

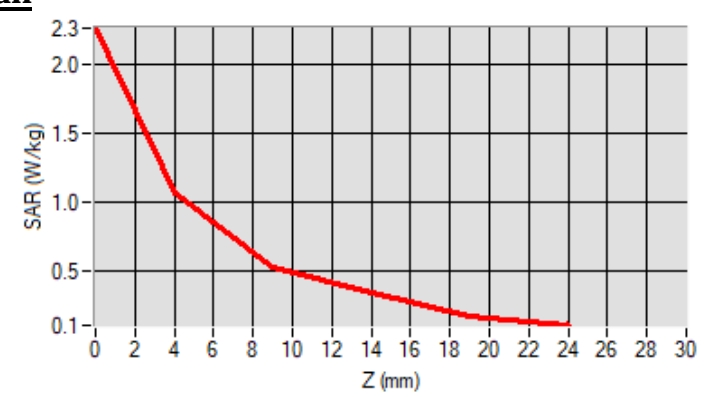

SAR Measurement at CUSTOM (LTE Band 66) (Cheek, Right)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE_Band_66
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.525972
Conductivity (S/m)	1.313927

C. SAR Surface and Volume

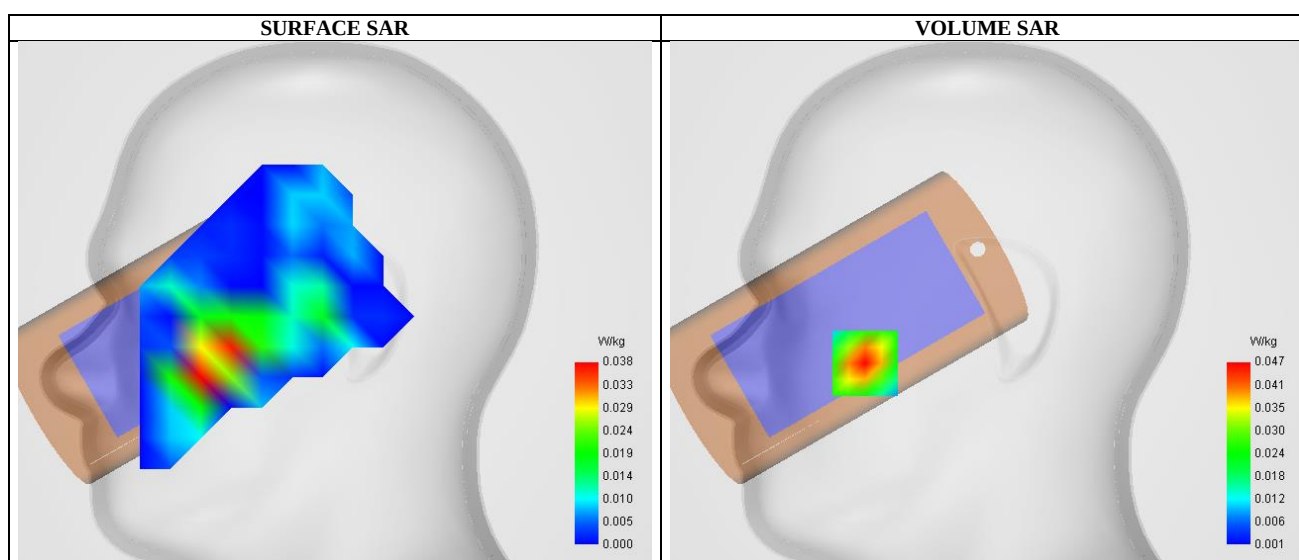


Maximum location: X=-60.00, Y=-29.00 ; SAR Peak: 0.06 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.025503
SAR 1g (W/Kg)	0.043704
Variation (%)	0.160004

E. Z Axis Scan

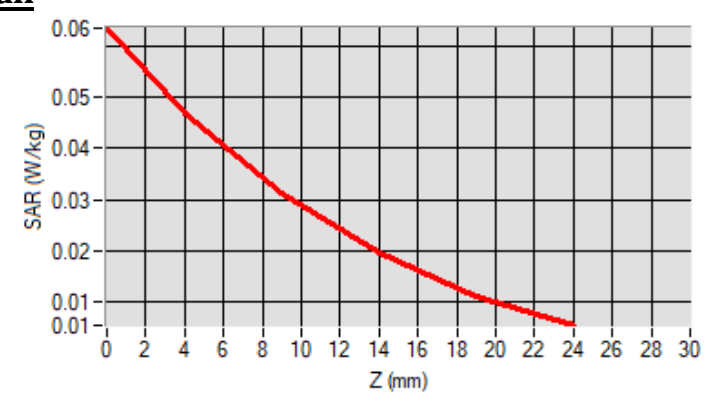

SAR Measurement at IEEE 802.11b ISM (Tilt, Left)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.80
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm, Complete
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.300571
Conductivity (S/m)	1.757631

C. SAR Surface and Volume

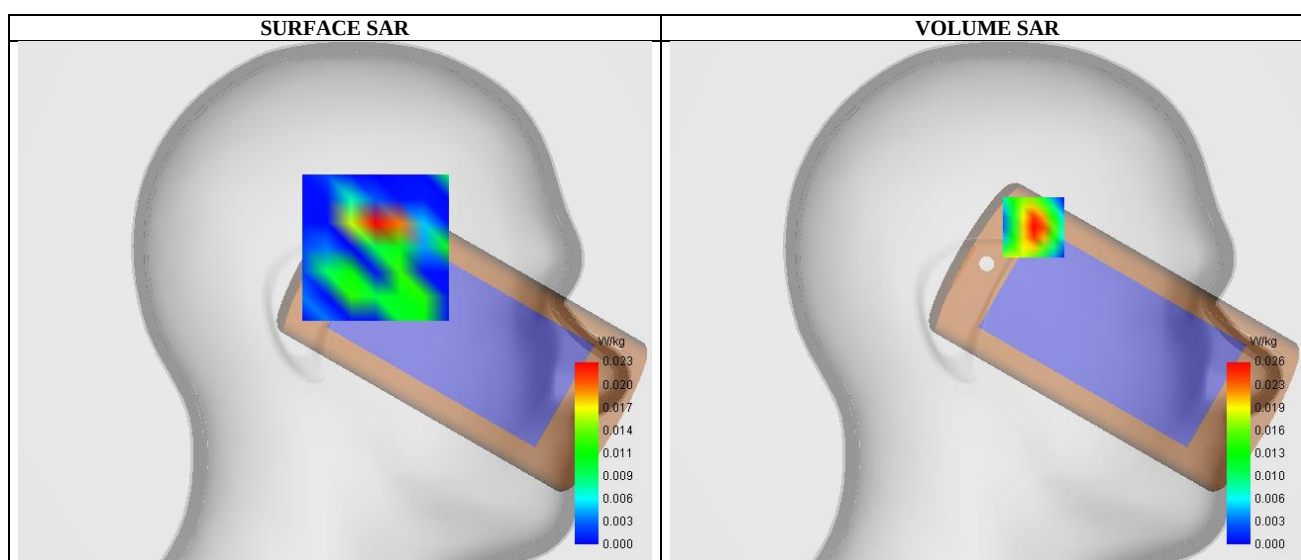


Maximum location: X=-23.00, Y=38.00 ; SAR Peak: 0.06 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.012026
SAR 1g (W/Kg)	0.025785
Variation (%)	-0.779999

E. Z Axis Scan

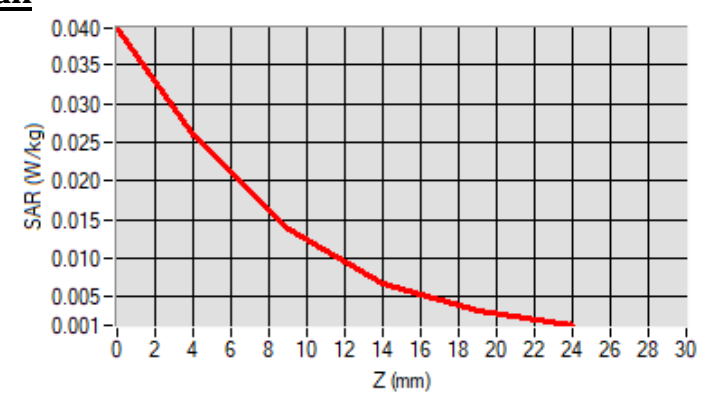

SAR Measurement at CUSTOM (5.2GHz_802.11a) (Cheek, Left)

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.55
Area Scan	dx=10mm dy=10mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Left head
Device Position	Cheek
Band	5.2GHz_802.11a
Channels	Middle
Signal	5.2GHz (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000000
Relative permittivity (real part)	36.481384
Conductivity (S/m)	4.861347

C. SAR Surface and Volume

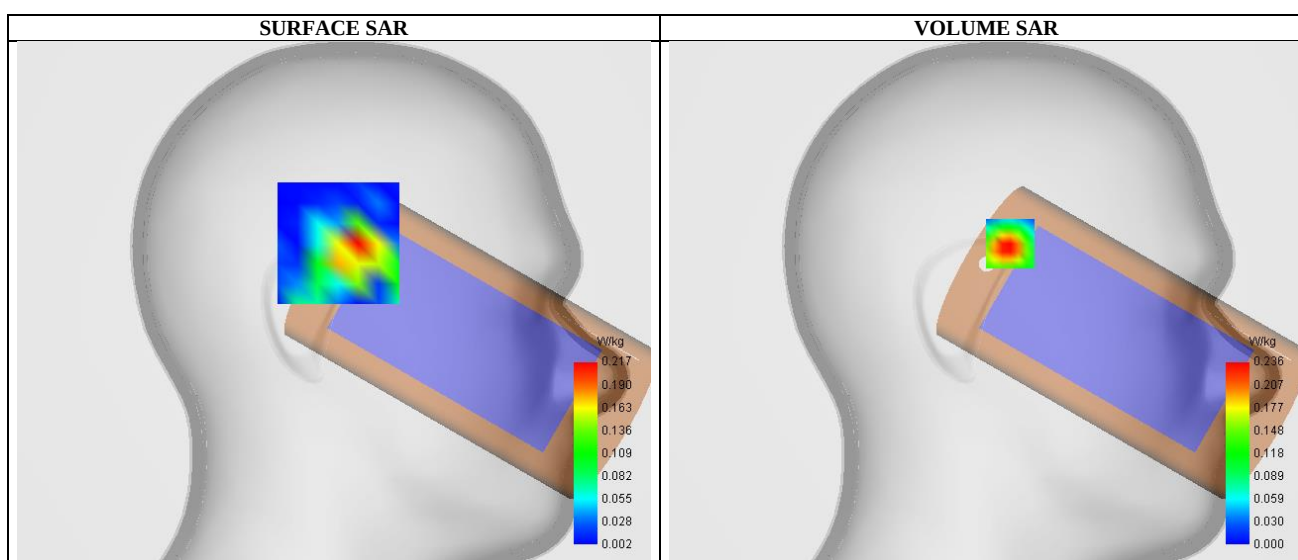


Maximum location: X=-12.00, Y=30.00 ; SAR Peak: 0.80 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.089053
SAR 1g (W/Kg)	0.254877
Variation (%)	0.590000

E. Z Axis Scan

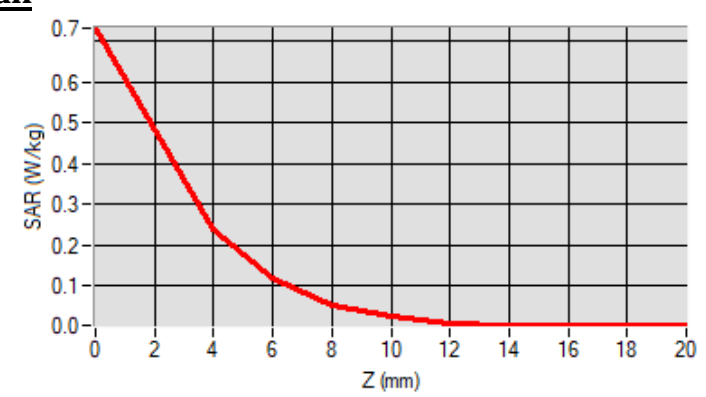

SAR Measurement at CUSTOM (5.8GHz_802.11a) (Cheek, Left)

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.35
Area Scan	dx=10mm dy=10mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Left head
Device Position	Cheek
Band	5.8GHz_802.11a
Channels	High
Signal	5.8GHz(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825.000000
Relative permittivity (real part)	35.784925
Conductivity (S/m)	5.547214

C. SAR Surface and Volume

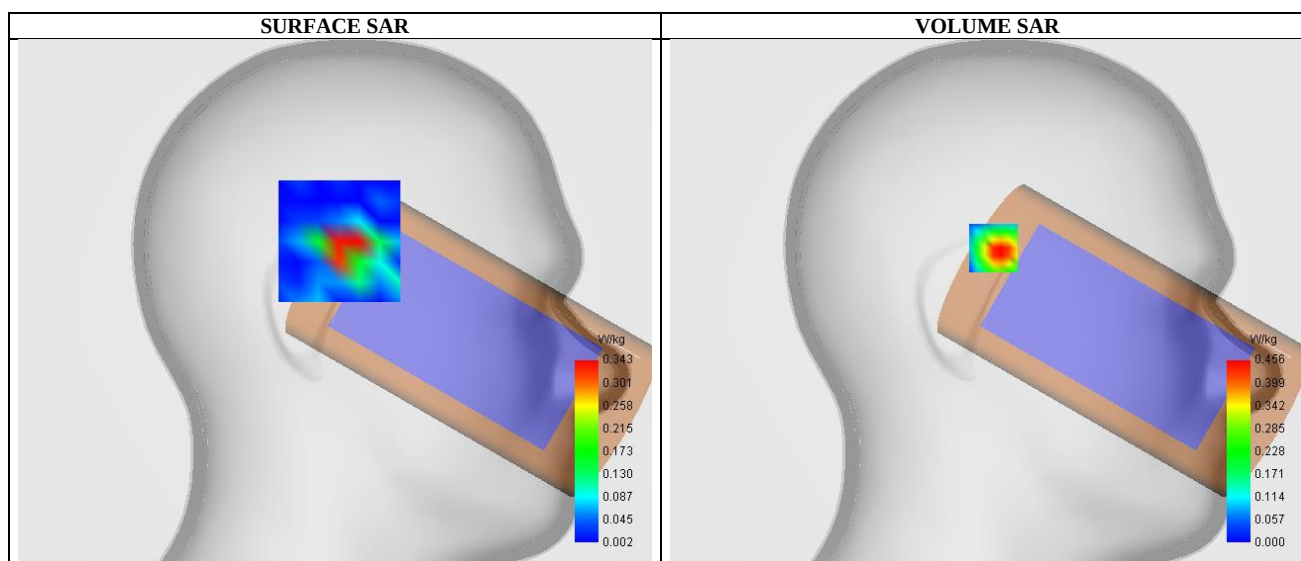


Maximum location: X=-3.00, Y=27.00 ; SAR Peak: 1.75 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.165913
SAR 1g (W/Kg)	0.505256
Variation (%)	0.050003

E. Z Axis Scan

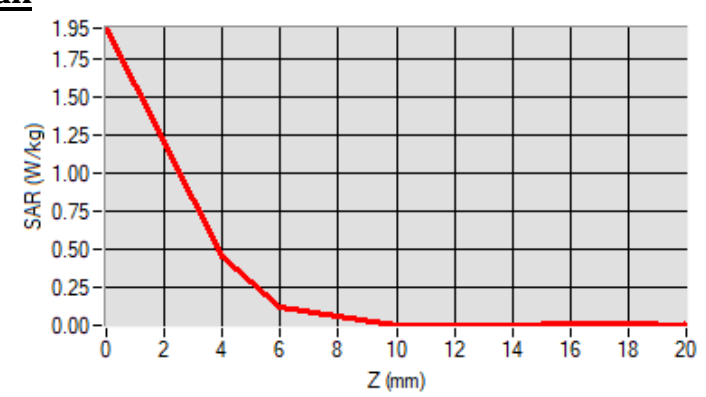

SAR Measurement at CUSTOM (GPRS850Txslots) (Body, Validation Plane)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Middle
Signal	TDMA(Crest factor: 2.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.683172
Conductivity (S/m)	0.940683

C. SAR Surface and Volume

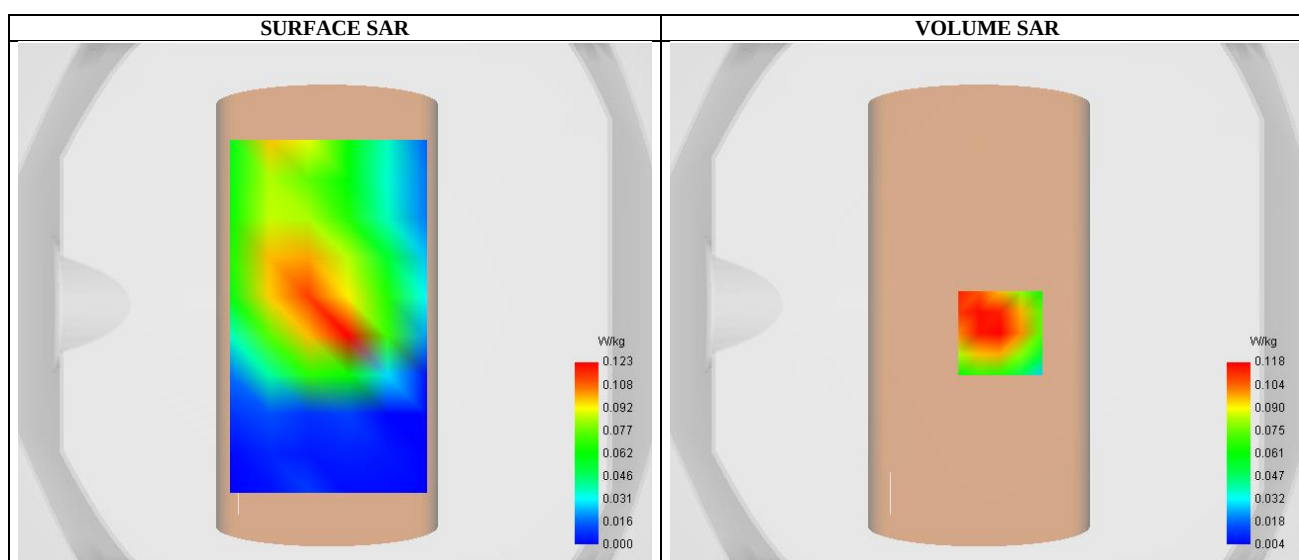


Maximum location: X=5.00, Y=-11.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.074322
SAR 1g (W/Kg)	0.117072
Variation (%)	-3.810000

E. Z Axis Scan

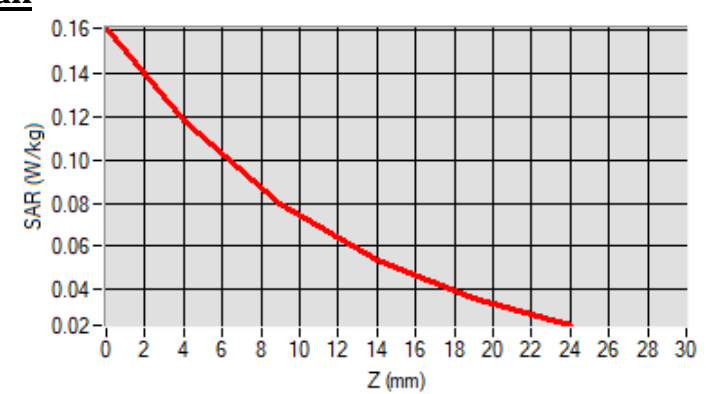

SAR Measurement at CUSTOM (GPRS19004Txslots) (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Channels	Middle
Signal	TDMA(Crest factor: 2.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.230587
Conductivity (S/m)	1.434185

C. SAR Surface and Volume

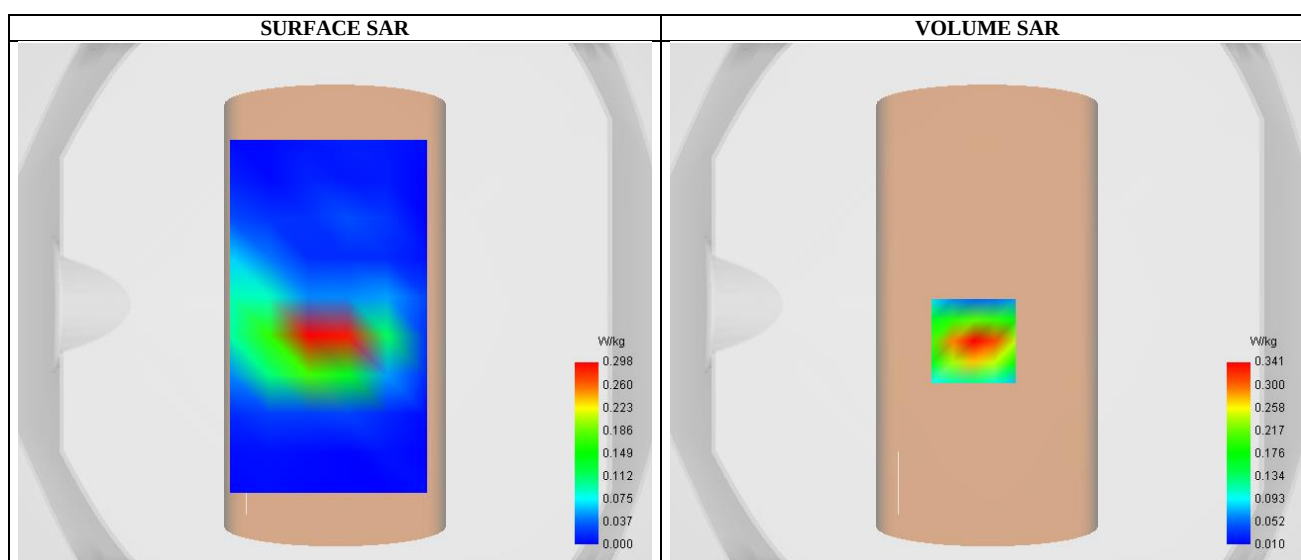


Maximum location: X=-5.00, Y=-14.00 ; SAR Peak: 0.51 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.166536
SAR 1g (W/Kg)	0.313827
Variation (%)	0.300000

E. Z Axis Scan

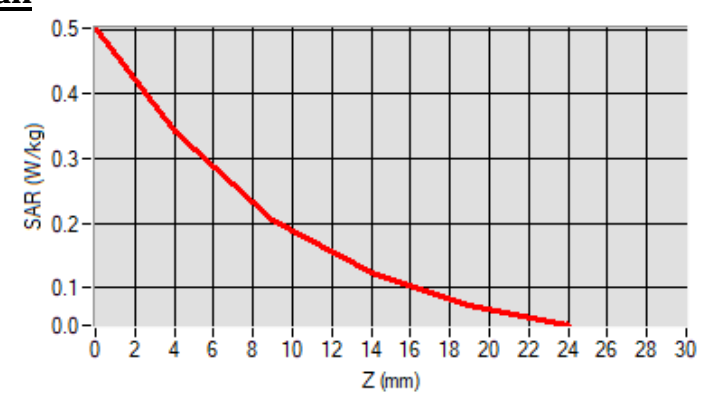

SAR Measurement at Band2_WCDMA1900 (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.230587
Conductivity (S/m)	1.434185

C. SAR Surface and Volume

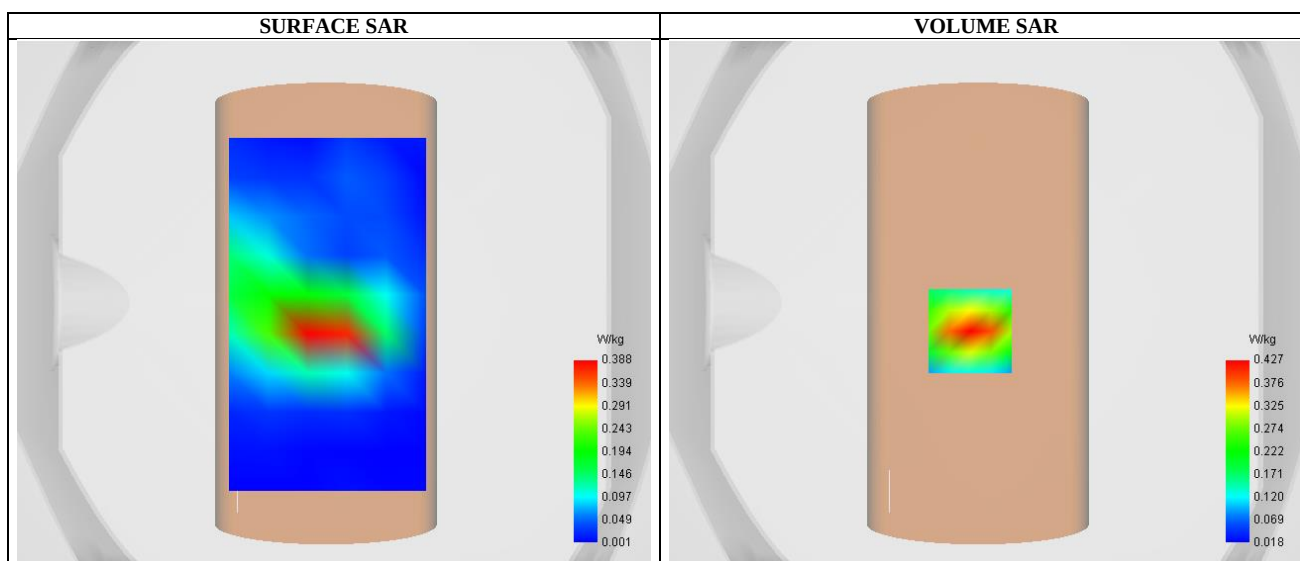


Maximum location: X=-6.00, Y=-11.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.219013
SAR 1g (W/Kg)	0.393088
Variation (%)	-0.590000

E. Z Axis Scan

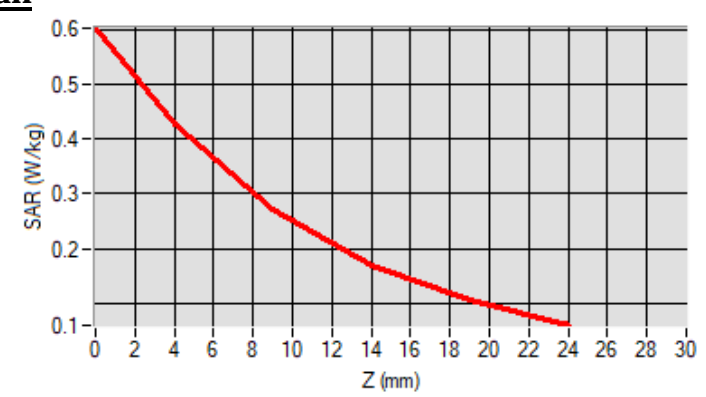

SAR Measurement at CUSTOM (WCDMA_1700) (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	WCDMA_1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	40.523749
Conductivity (S/m)	1.310751

C. SAR Surface and Volume

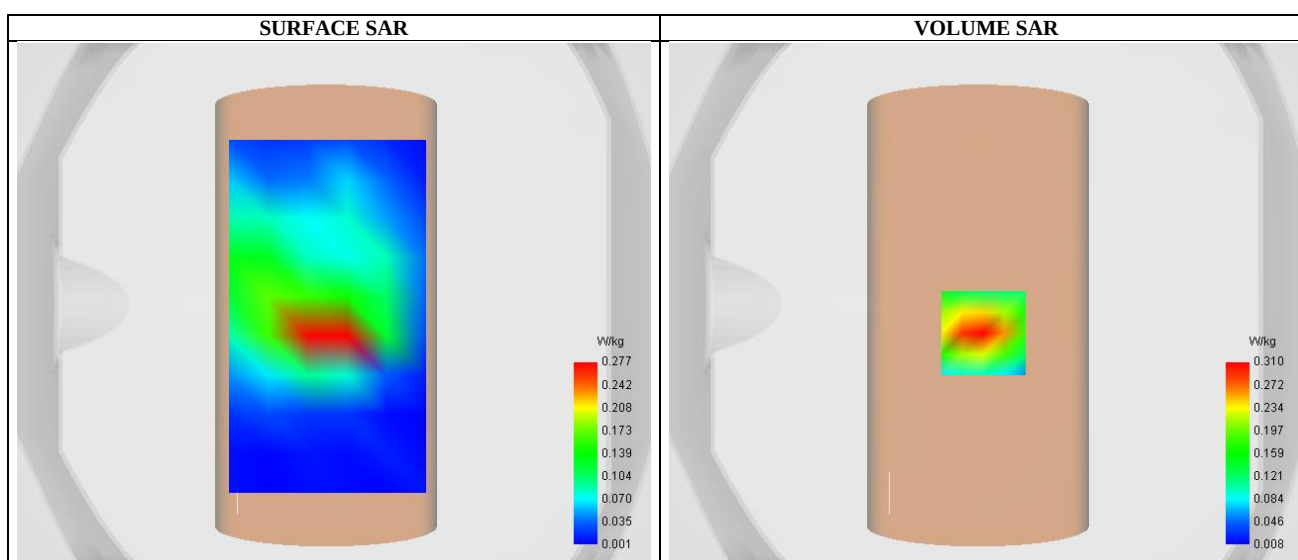


Maximum location: X=-1.00, Y=-11.00 ; SAR Peak: 0.38 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.135240
SAR 1g (W/Kg)	0.237783
Variation (%)	-3.290000

E. Z Axis Scan

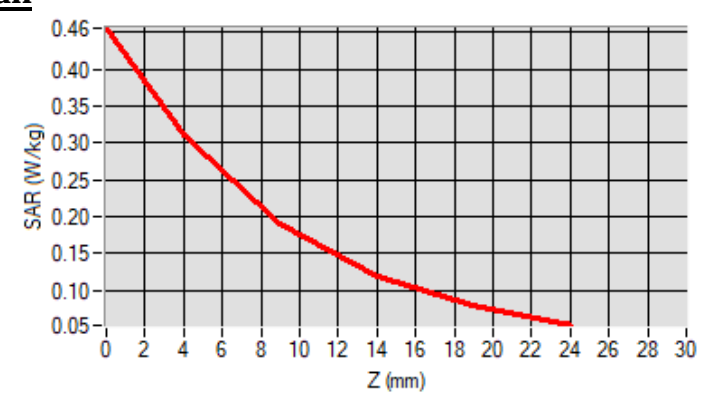

SAR Measurement at Band5_WCDMA850 (Body, Validation Plane)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.673807
Conductivity (S/m)	0.956184

C. SAR Surface and Volume

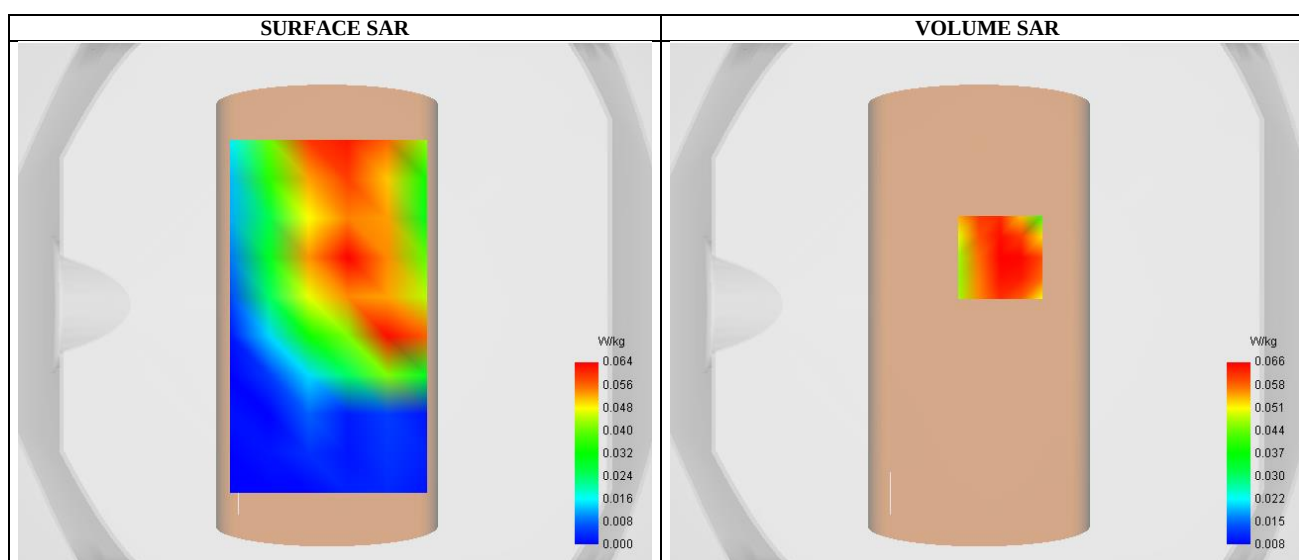


Maximum location: X=5.00, Y=18.00 ; SAR Peak: 0.09 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.045940
SAR 1g (W/Kg)	0.064269
Variation (%)	-0.410000

E. Z Axis Scan

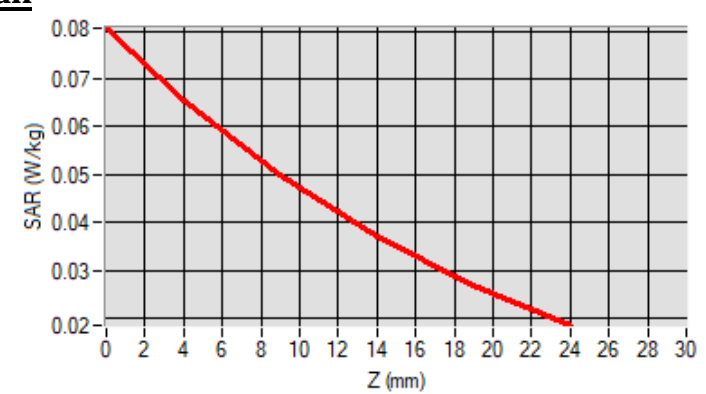

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2560.000000
Relative permittivity (real part)	40.653801
Conductivity (S/m)	1.885762

C. SAR Surface and Volume

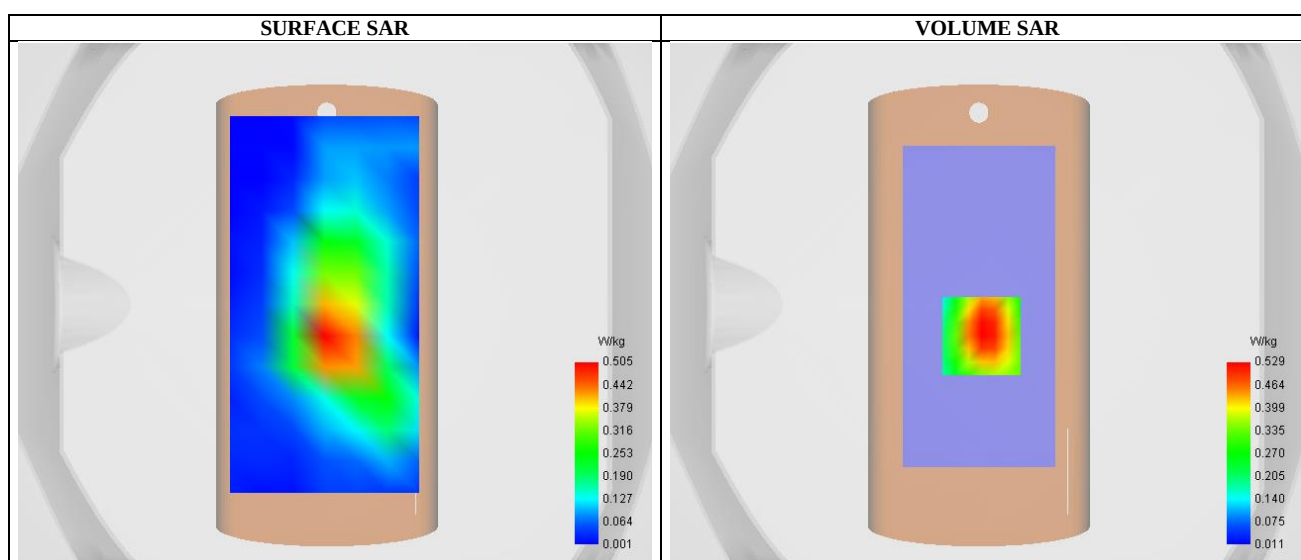


Maximum location: X=-2.00, Y=-12.00 ; SAR Peak: 0.79 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.274251
SAR 1g (W/Kg)	0.493845
Variation (%)	-0.330000

E. Z Axis Scan

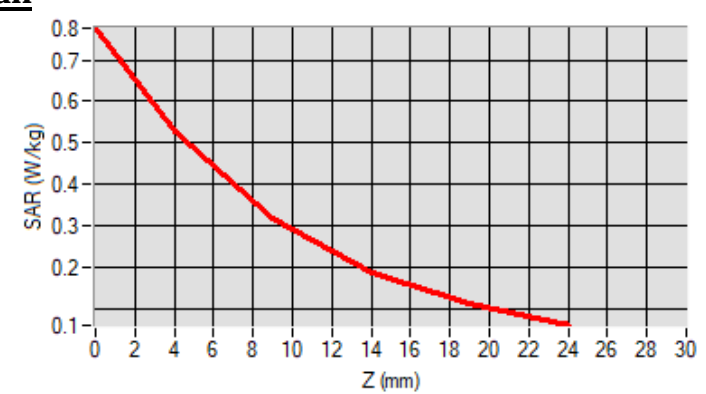

SAR Measurement at LTE band 25 (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 25
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1882.500000
Relative permittivity (real part)	40.244817
Conductivity (S/m)	1.423731

C. SAR Surface and Volume

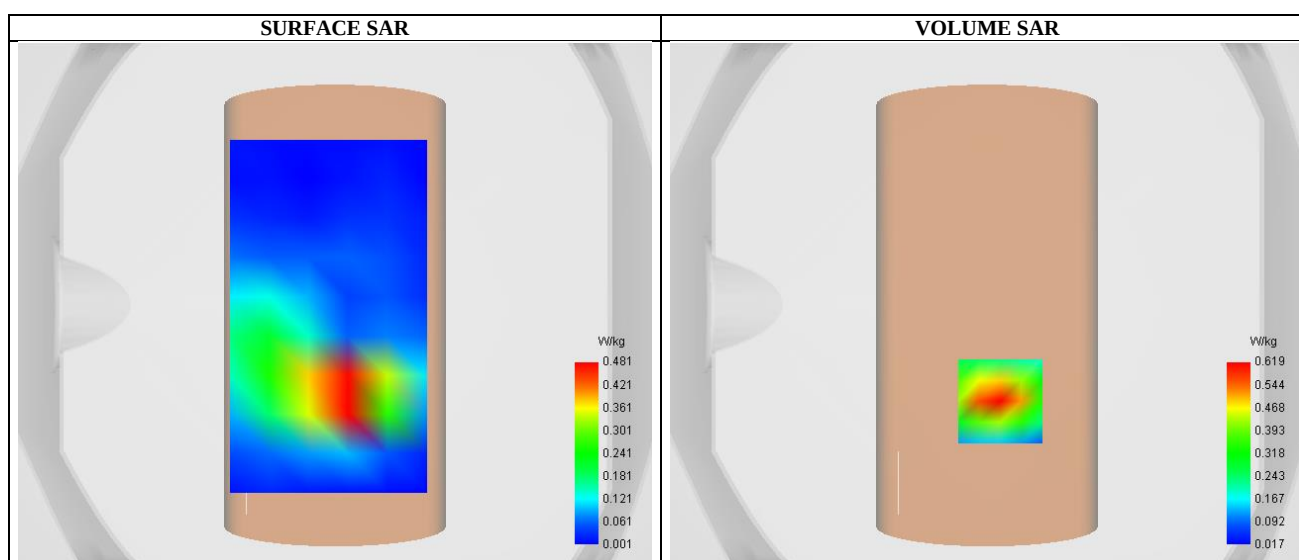


Maximum location: X=5.00, Y=-37.00 ; SAR Peak: 0.92 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.306798
SAR 1g (W/Kg)	0.570705
Variation (%)	0.100000

E. Z Axis Scan

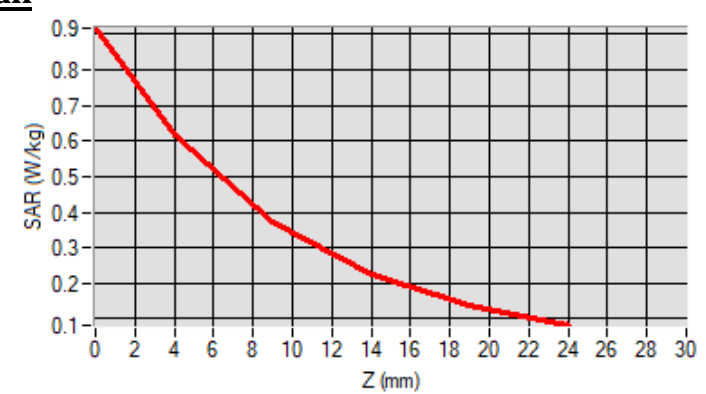

SAR Measurement at CUSTOM (LTE Band 26) (Body, Validation Plane)

Date of measurement: 31/5/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE Band 26
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	841.500000
Relative permittivity (real part)	41.670628
Conductivity (S/m)	0.951357

C. SAR Surface and Volume

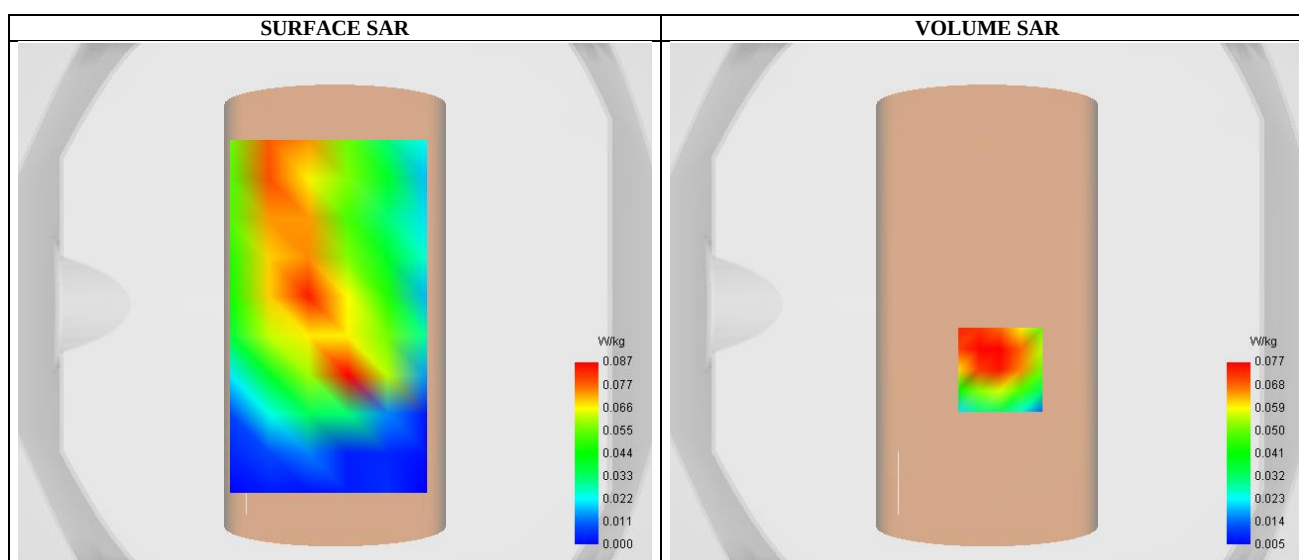


Maximum location: X=5.00, Y=-25.00 ; SAR Peak: 0.10 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.048592
SAR 1g (W/Kg)	0.074820
Variation (%)	3.480000

E. Z Axis Scan

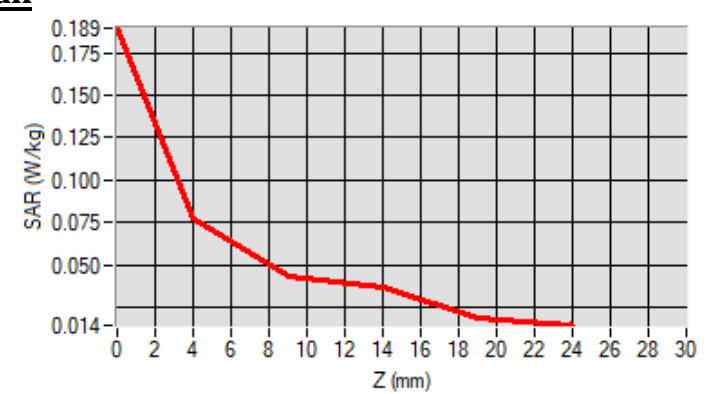

SAR Measurement at LTE band 41 (Body, Validation Plane)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2593.000000
Relative permittivity (real part)	40.672934
Conductivity (S/m)	1.862094

C. SAR Surface and Volume

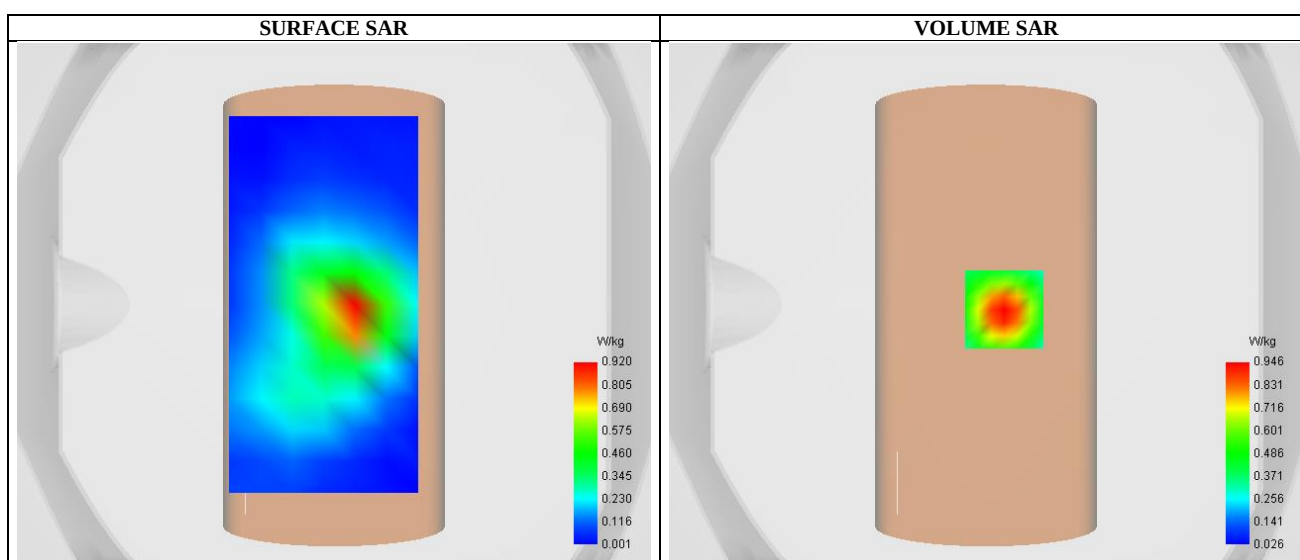


Maximum location: X=7.00, Y=-2.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.448658
SAR 1g (W/Kg)	0.859574
Variation (%)	-1.580000

E. Z Axis Scan

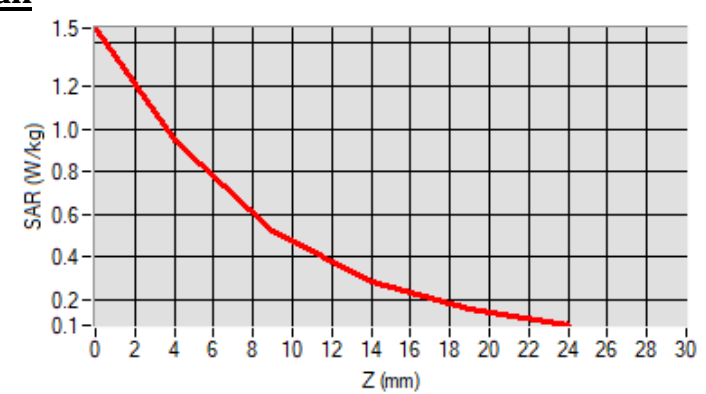

SAR Measurement at CUSTOM (LTE Band 66) (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE Band 66
Channels	Low
Signal	LTE(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.525972
Conductivity (S/m)	1.313927

C. SAR Surface and Volume

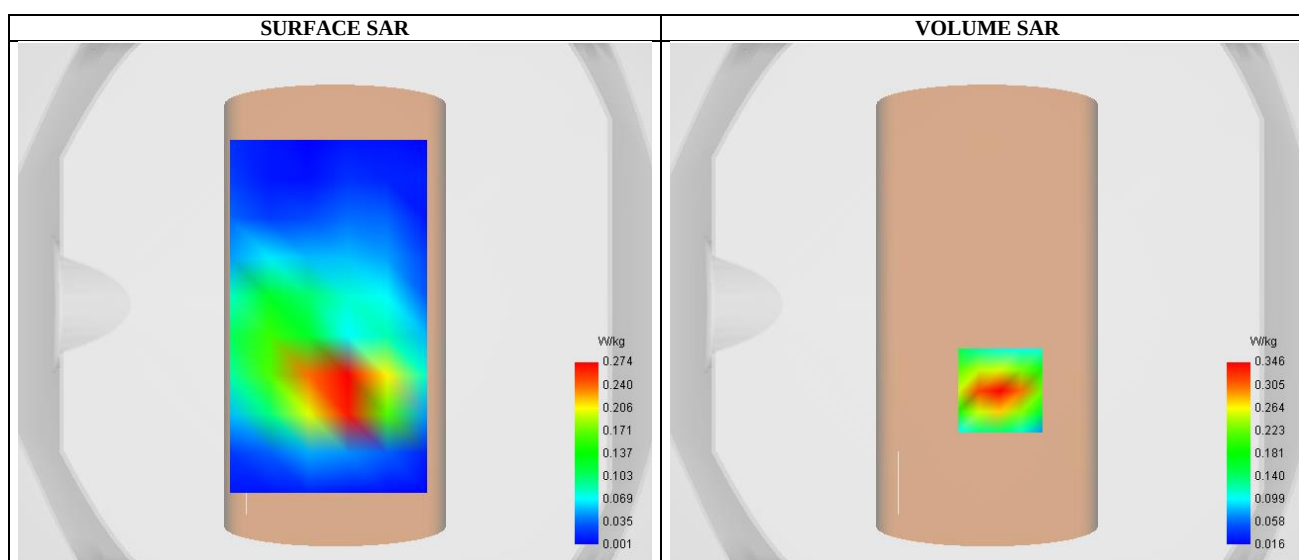


Maximum location: X=5.00, Y=-33.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.181945
SAR 1g (W/Kg)	0.320801
Variation (%)	0.640000

E. Z Axis Scan

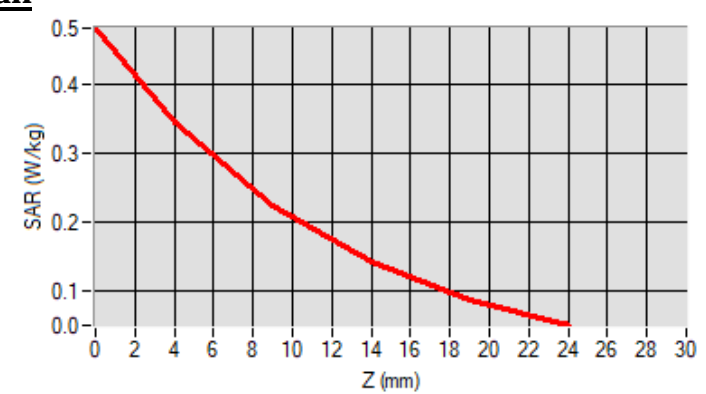

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.300571
Conductivity (S/m)	1.757631

C. SAR Surface and Volume

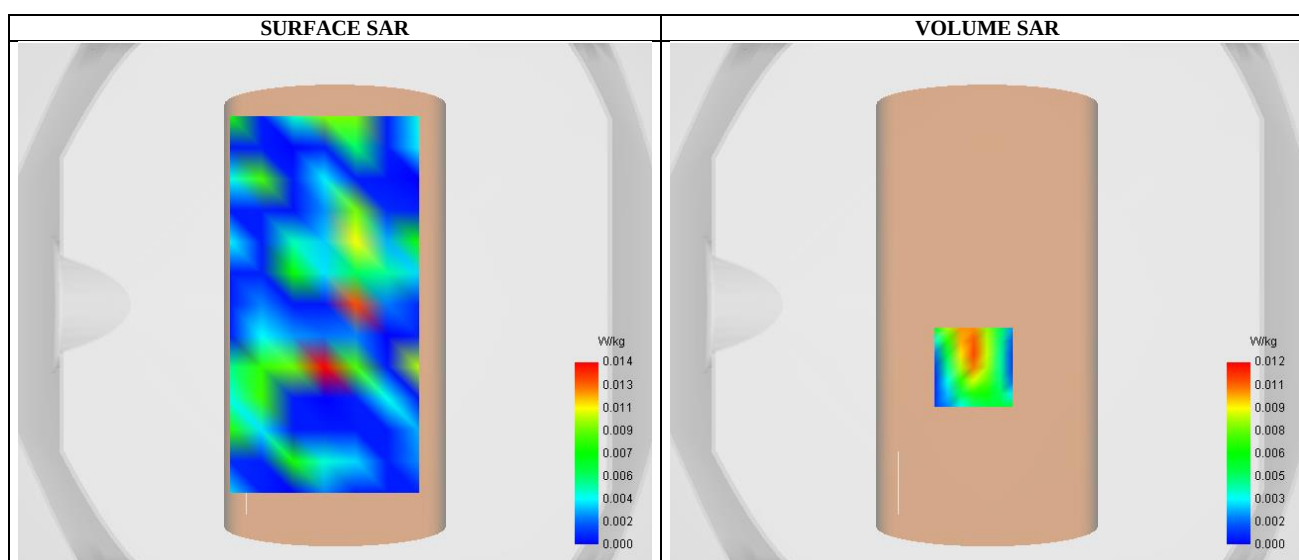


Maximum location: X=-5.00, Y=-24.00 ; SAR Peak: 0.04 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.005589
SAR 1g (W/Kg)	0.012955
Variation (%)	0.250000

E. Z Axis Scan

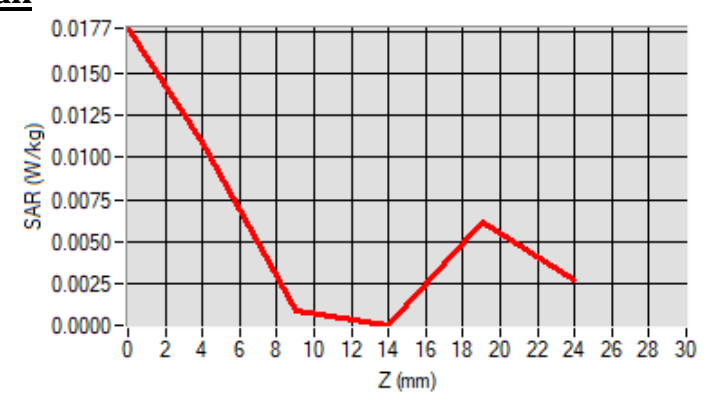

SAR Measurement at CUSTOM (5.2GHz_802.11a) (Body, Validation Plane)

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.55
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Body
Band	5.2GHz_802.11a
Channels	Middle
Signal	5.2GHz (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000000
Relative permittivity (real part)	36.481384
Conductivity (S/m)	4.861347

C. SAR Surface and Volume

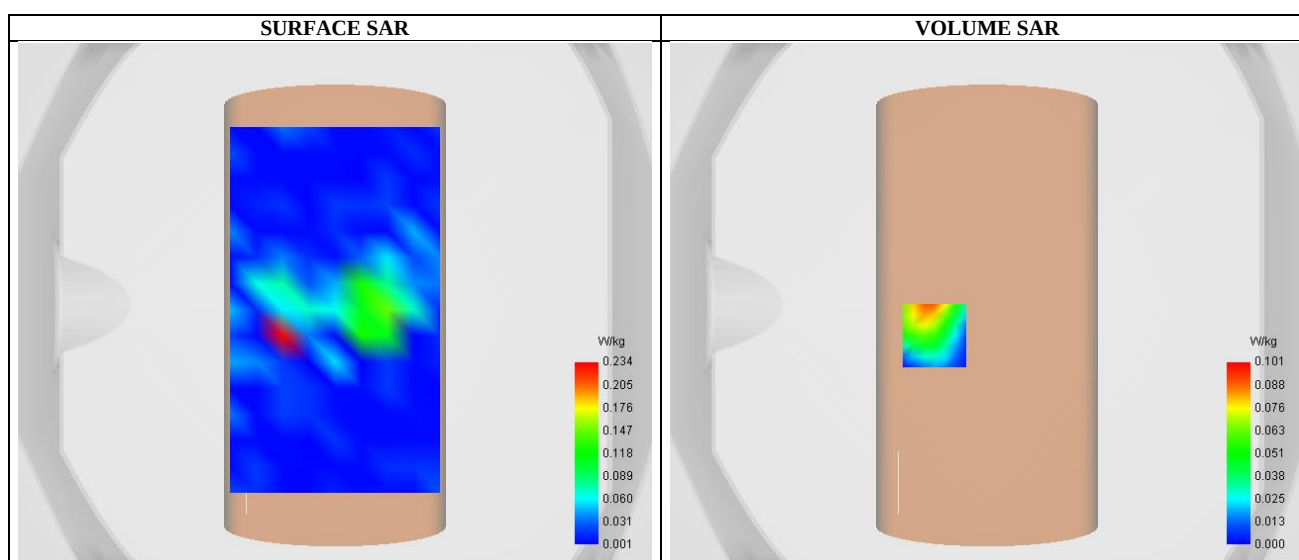


Maximum location: X=-20.00, Y=-12.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.015009
SAR 1g (W/Kg)	0.071742
Variation (%)	0.910000

E. Z Axis Scan

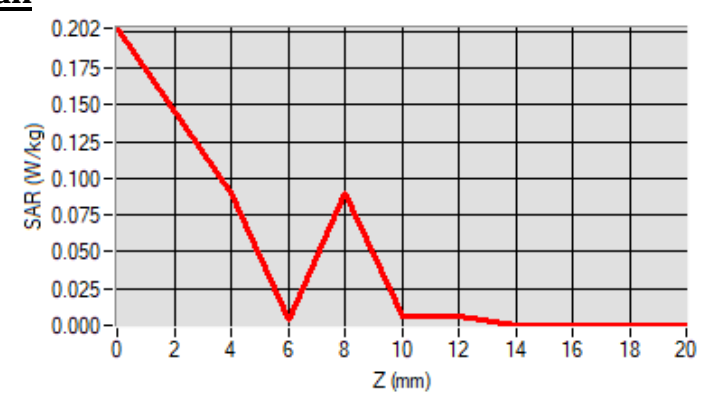

SAR Measurement at CUSTOM (5.8GHz_802.11a) (Body, Validation Plane)

Date of measurement: 9/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	1.35
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Body
Band	5.8GHz_802.11a
Channels	High
Signal	5.8GHz(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825.000000
Relative permittivity (real part)	35.784925
Conductivity (S/m)	5.547214

C. SAR Surface and Volume

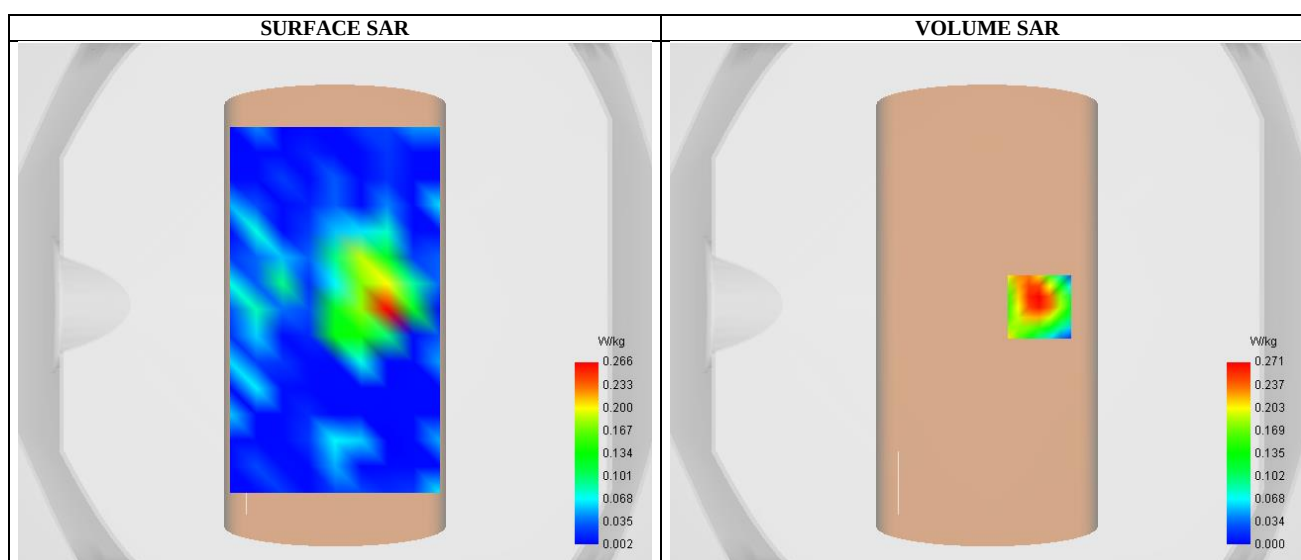


Maximum location: X=20.00, Y=-1.00 ; SAR Peak: 0.58 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.052754
SAR 1g (W/Kg)	0.171705
Variation (%)	-0.400000

E. Z Axis Scan

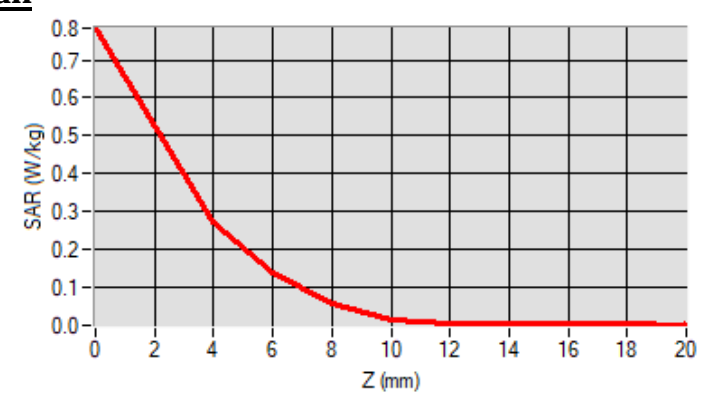

SAR Measurement at Band2_WCDMA1900 (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.230587
Conductivity (S/m)	1.434185

C. SAR Surface and Volume

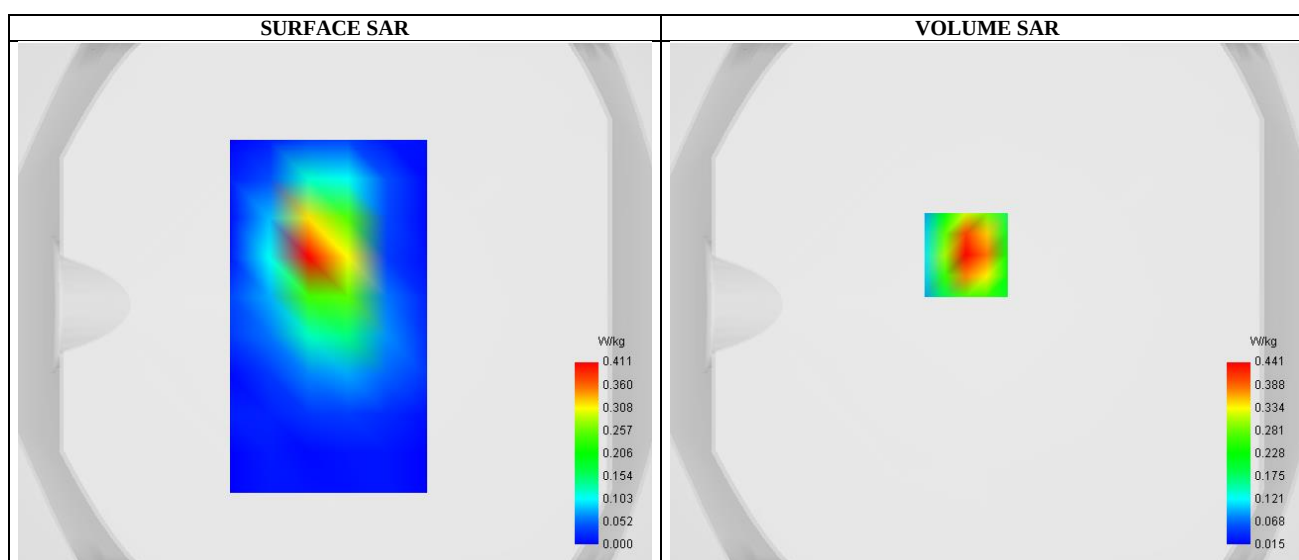


Maximum location: X=-8.00, Y=19.00 ; SAR Peak: 0.62 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.233609
SAR 1g (W/Kg)	0.411756
Variation (%)	2.670000

E. Z Axis Scan

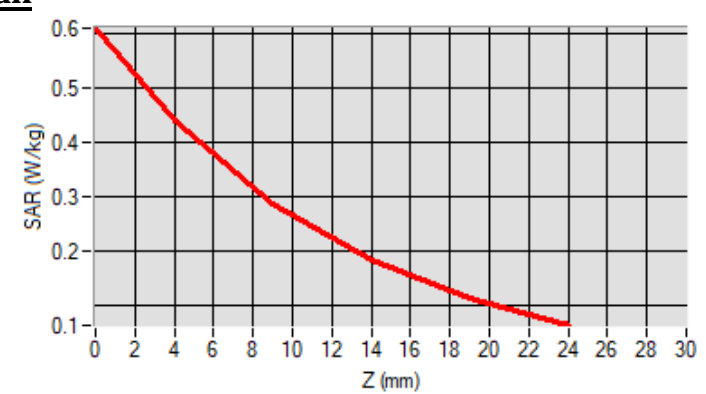

SAR Measurement at CUSTOM (WCDMA_1700) (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	WCDMA_1700
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.599976
Relative permittivity (real part)	40.523749
Conductivity (S/m)	1.310751

C. SAR Surface and Volume

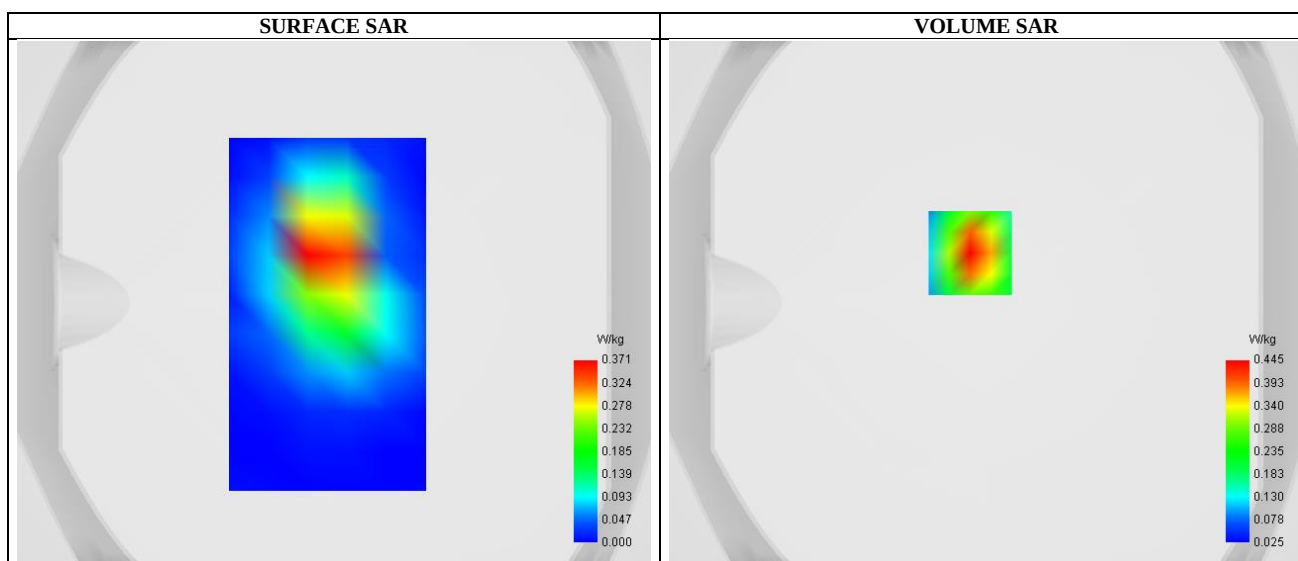


Maximum location: X=-6.00, Y=19.00 ; SAR Peak: 0.54 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.194506
SAR 1g (W/Kg)	0.343179
Variation (%)	0.720000

E. Z Axis Scan

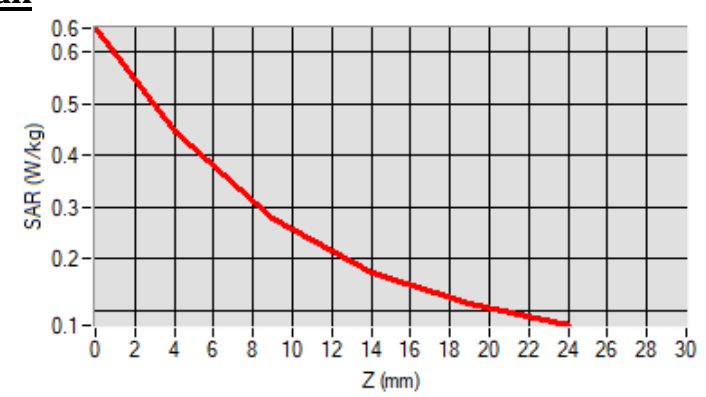

SAR Measurement at LTE band 41 (Body, Validation Plane)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Channels	Middle
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2593.000000
Relative permittivity (real part)	40.672934
Conductivity (S/m)	1.862094

C. SAR Surface and Volume

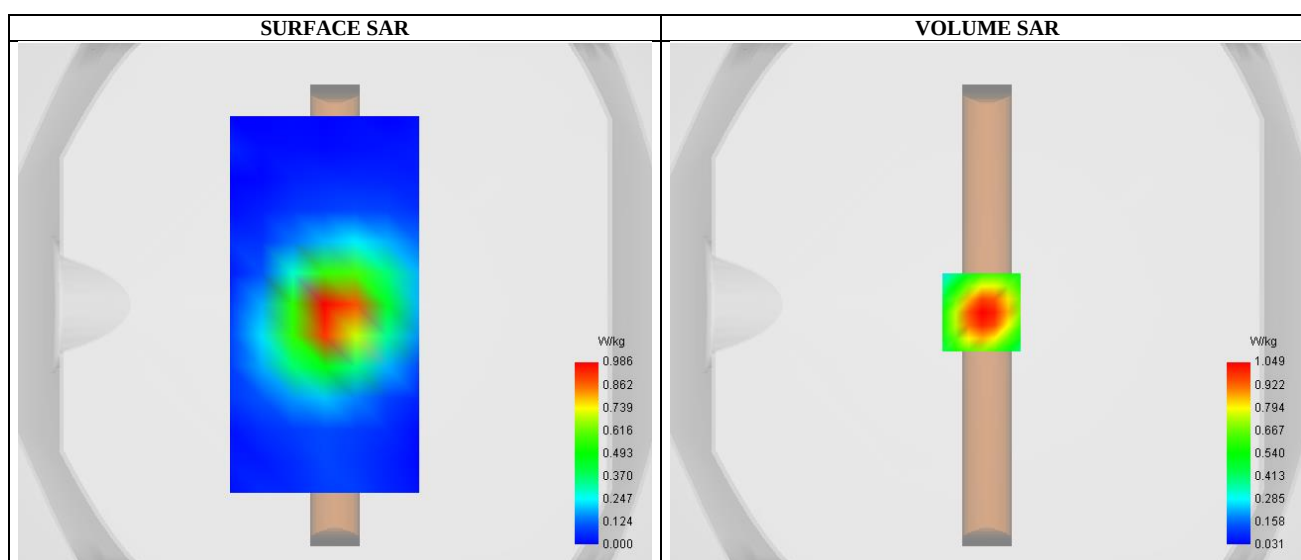


Maximum location: X=-2.00, Y=-3.00 ; SAR Peak: 1.65 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.514996
SAR 1g (W/Kg)	0.967110
Variation (%)	-0.059999

E. Z Axis Scan

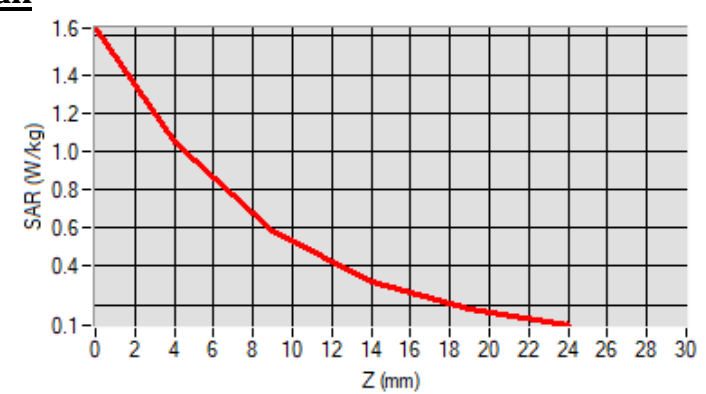

SAR Measurement at CUSTOM (LTE Band 66) (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE Band 66
Channels	Low
Signal	LTE(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.525972
Conductivity (S/m)	1.313927

C. SAR Surface and Volume

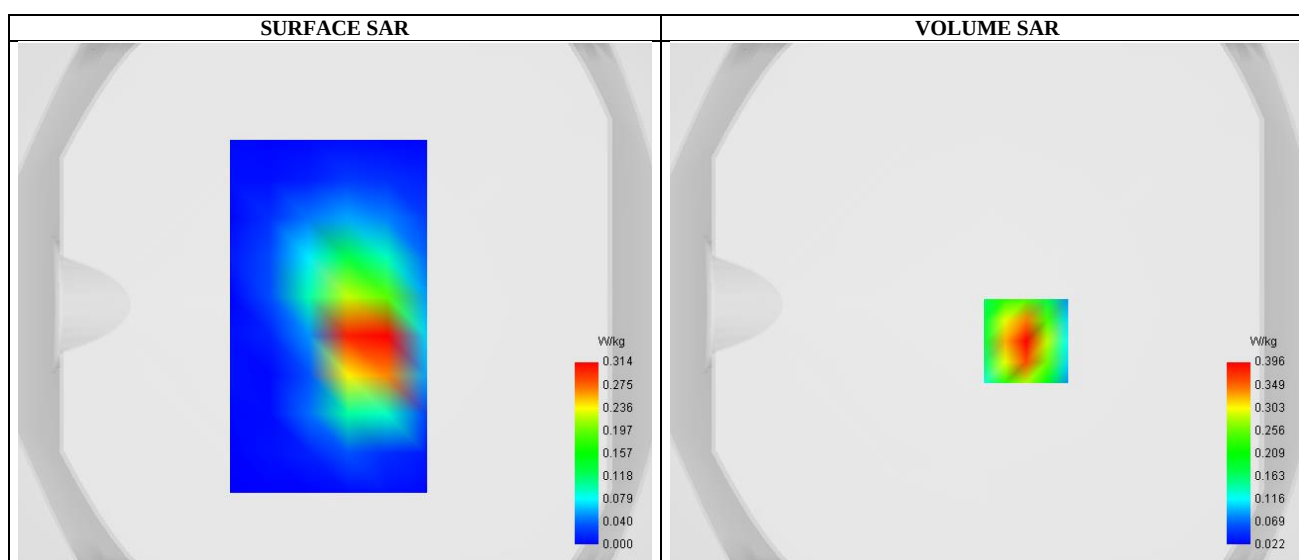


Maximum location: X=15.00, Y=-14.00 ; SAR Peak: 0.57 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.207081
SAR 1g (W/Kg)	0.367529
Variation (%)	0.440000

E. Z Axis Scan

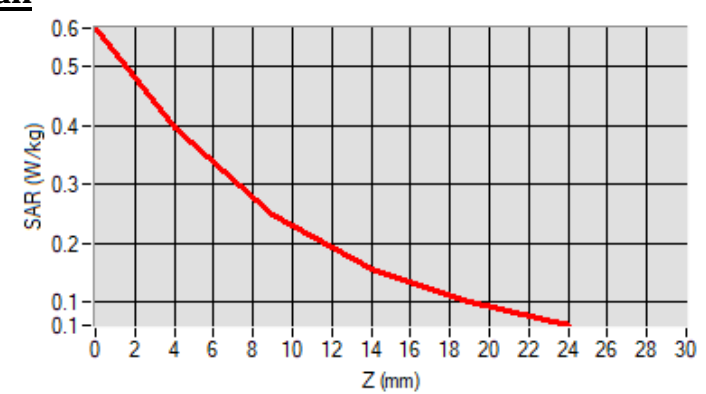

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 6/6/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.300571
Conductivity (S/m)	1.757631

C. SAR Surface and Volume

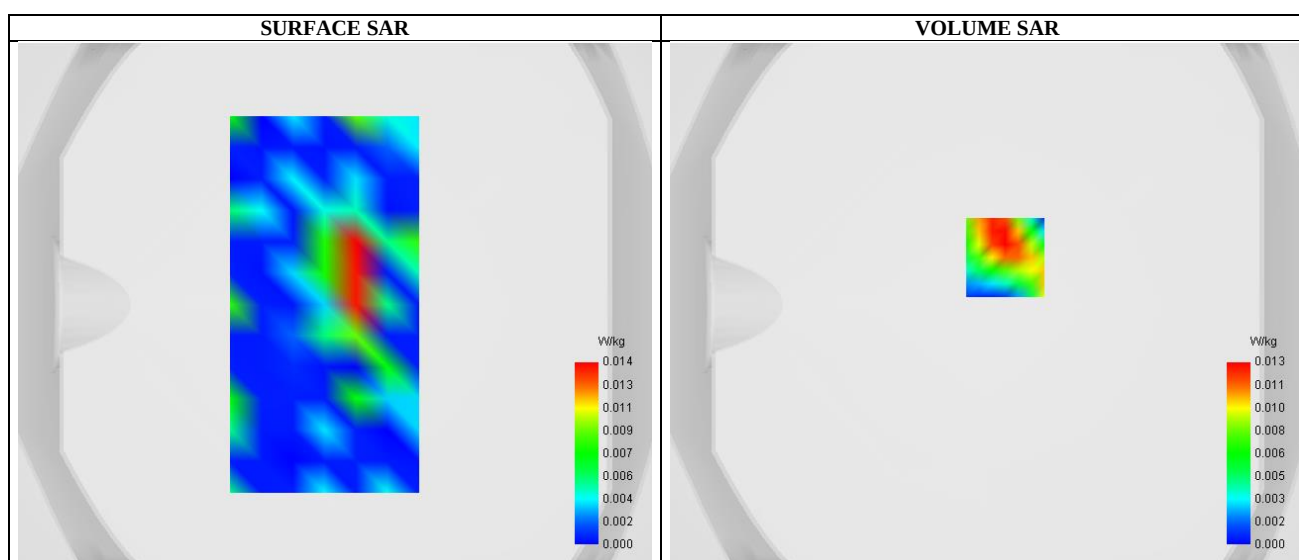


Maximum location: X=7.00, Y=18.00 ; SAR Peak: 0.04 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.005738
SAR 1g (W/Kg)	0.014706
Variation (%)	0.979996

E. Z Axis Scan

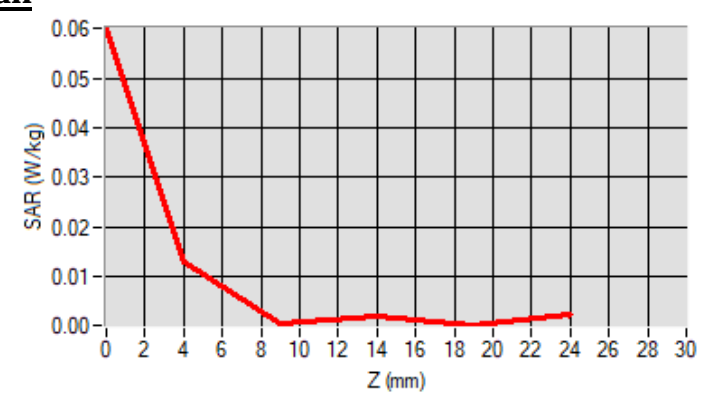

-----End of Report-----