

1. Effective (Isotropic) Radiated Power Output Data

1.1 GSM850_ERP

1.1.1 Test Result

Band: GSM850								
ENV	Mode		Frequency (MHz)	Conducted Power (dBm)	Gain (dbi)	ERP (dBm)		Verdict
	Network	Subset				Result	Limit	
NTNV	GSM	GSM	824.2	31.15	-0.12	28.88	<=38.45	Pass
			836.6	31.29	-0.12	29.02	<=38.45	Pass
			848.8	31.45	-0.12	29.18	<=38.45	Pass
	GPRS	1 TX Slot	824.2	31.17	-0.12	28.90	<=38.45	Pass
		2 TX Slots	824.2	29.29	-0.12	27.02	<=38.45	Pass
		3 TX Slots	824.2	27.36	-0.12	25.09	<=38.45	Pass
		4 TX Slots	824.2	25.18	-0.12	22.91	<=38.45	Pass
		1 TX Slot	836.6	31.23	-0.12	28.96	<=38.45	Pass
		2 TX Slots	836.6	29.21	-0.12	26.94	<=38.45	Pass
		3 TX Slots	836.6	27.30	-0.12	25.03	<=38.45	Pass
		4 TX Slots	836.6	25.13	-0.12	22.86	<=38.45	Pass
		1 TX Slot	848.8	31.42	-0.12	29.15	<=38.45	Pass
		2 TX Slots	848.8	29.20	-0.12	26.93	<=38.45	Pass
		3 TX Slots	848.8	27.25	-0.12	24.98	<=38.45	Pass
		4 TX Slots	848.8	25.06	-0.12	22.79	<=38.45	Pass
	EGPRS	1 TX Slot	824.2	24.12	-0.12	21.85	<=38.45	Pass
		2 TX Slots	824.2	23.11	-0.12	20.84	<=38.45	Pass
		3 TX Slots	824.2	21.00	-0.12	18.73	<=38.45	Pass
		4 TX Slots	824.2	18.61	-0.12	16.34	<=38.45	Pass
		1 TX Slot	836.6	24.10	-0.12	21.83	<=38.45	Pass
		2 TX Slots	836.6	23.16	-0.12	20.89	<=38.45	Pass
		3 TX Slots	836.6	21.00	-0.12	18.73	<=38.45	Pass
		4 TX Slots	836.6	18.38	-0.12	16.11	<=38.45	Pass
		1 TX Slot	848.8	23.83	-0.12	21.56	<=38.45	Pass
		2 TX Slots	848.8	22.82	-0.12	20.55	<=38.45	Pass
		3 TX Slots	848.8	20.65	-0.12	18.38	<=38.45	Pass
		4 TX Slots	848.8	18.15	-0.12	15.88	<=38.45	Pass

Note1: ERP=Conducted Power+Antenna Gain-2.15

2. Frequency Stability

2.1 GSM850

2.1.1 Test Result

Band: GSM850							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	824.2	20	3.23	3.777	0.0046	-2.5 to 2.5	Pass
			3.8	-2.841	-0.0034	-2.5 to 2.5	Pass
			4.37	0.387	0.0005	-2.5 to 2.5	Pass
		-30	3.8	11.591	0.0141	-2.5 to 2.5	Pass
		-20	3.8	4.229	0.0051	-2.5 to 2.5	Pass
		-10	3.8	7.264	0.0088	-2.5 to 2.5	Pass

		0	3.8	5.489	0.0067	-2.5 to 2.5	Pass
		10	3.8	-3.261	-0.0040	-2.5 to 2.5	Pass
		30	3.8	11.752	0.0143	-2.5 to 2.5	Pass
		40	3.8	10.105	0.0123	-2.5 to 2.5	Pass
		50	3.8	6.296	0.0076	-2.5 to 2.5	Pass
	836.6	20	3.23	12.139	0.0145	-2.5 to 2.5	Pass
			3.8	11.558	0.0138	-2.5 to 2.5	Pass
			4.37	6.134	0.0073	-2.5 to 2.5	Pass
		-30	3.8	18.629	0.0223	-2.5 to 2.5	Pass
		-20	3.8	14.464	0.0173	-2.5 to 2.5	Pass
		-10	3.8	10.170	0.0122	-2.5 to 2.5	Pass
		0	3.8	7.361	0.0088	-2.5 to 2.5	Pass
		10	3.8	7.652	0.0091	-2.5 to 2.5	Pass
		30	3.8	5.456	0.0065	-2.5 to 2.5	Pass
		40	3.8	3.648	0.0044	-2.5 to 2.5	Pass
		50	3.8	10.590	0.0127	-2.5 to 2.5	Pass
	848.8	20	3.23	3.745	0.0044	-2.5 to 2.5	Pass
			3.8	7.749	0.0091	-2.5 to 2.5	Pass
			4.37	2.873	0.0034	-2.5 to 2.5	Pass
		-30	3.8	3.455	0.0041	-2.5 to 2.5	Pass
		-20	3.8	5.359	0.0063	-2.5 to 2.5	Pass
		-10	3.8	0.194	0.0002	-2.5 to 2.5	Pass
		0	3.8	6.199	0.0073	-2.5 to 2.5	Pass
		10	3.8	3.067	0.0036	-2.5 to 2.5	Pass
		30	3.8	1.388	0.0016	-2.5 to 2.5	Pass
		40	3.8	8.556	0.0101	-2.5 to 2.5	Pass
		50	3.8	5.069	0.0060	-2.5 to 2.5	Pass
GPRS	824.2	20	3.23	4.585	0.0056	-2.5 to 2.5	Pass
			3.8	-1.937	-0.0024	-2.5 to 2.5	Pass
			4.37	3.390	0.0041	-2.5 to 2.5	Pass
		-30	3.8	-0.549	-0.0007	-2.5 to 2.5	Pass
		-20	3.8	-0.420	-0.0005	-2.5 to 2.5	Pass
		-10	3.8	-3.777	-0.0046	-2.5 to 2.5	Pass
		0	3.8	3.455	0.0042	-2.5 to 2.5	Pass
		10	3.8	0.000	0.0000	-2.5 to 2.5	Pass
		30	3.8	-0.807	-0.0010	-2.5 to 2.5	Pass
		40	3.8	2.486	0.0030	-2.5 to 2.5	Pass
		50	3.8	-2.099	-0.0025	-2.5 to 2.5	Pass
	836.6	20	3.23	6.877	0.0082	-2.5 to 2.5	Pass
			3.8	8.523	0.0102	-2.5 to 2.5	Pass
			4.37	9.105	0.0109	-2.5 to 2.5	Pass
		-30	3.8	10.945	0.0131	-2.5 to 2.5	Pass
		-20	3.8	4.585	0.0055	-2.5 to 2.5	Pass
		-10	3.8	4.746	0.0057	-2.5 to 2.5	Pass
		0	3.8	4.100	0.0049	-2.5 to 2.5	Pass
		10	3.8	2.228	0.0027	-2.5 to 2.5	Pass
		30	3.8	5.585	0.0067	-2.5 to 2.5	Pass
		40	3.8	1.324	0.0016	-2.5 to 2.5	Pass
		50	3.8	4.488	0.0054	-2.5 to 2.5	Pass
	848.8	20	3.23	3.422	0.0040	-2.5 to 2.5	Pass
			3.8	5.779	0.0068	-2.5 to 2.5	Pass
			4.37	2.938	0.0035	-2.5 to 2.5	Pass
		-30	3.8	7.490	0.0088	-2.5 to 2.5	Pass
		-20	3.8	2.228	0.0026	-2.5 to 2.5	Pass
		-10	3.8	3.810	0.0045	-2.5 to 2.5	Pass
		0	3.8	6.812	0.0080	-2.5 to 2.5	Pass
		10	3.8	4.811	0.0057	-2.5 to 2.5	Pass

EGPRS		30	3.8	3.487	0.0041	-2.5 to 2.5	Pass
		40	3.8	5.392	0.0064	-2.5 to 2.5	Pass
		50	3.8	3.713	0.0044	-2.5 to 2.5	Pass
	824.2	20	3.23	4.133	0.0050	-2.5 to 2.5	Pass
			3.8	-0.581	-0.0007	-2.5 to 2.5	Pass
			4.37	3.325	0.0040	-2.5 to 2.5	Pass
		-30	3.8	0.194	0.0002	-2.5 to 2.5	Pass
		-20	3.8	3.455	0.0042	-2.5 to 2.5	Pass
		-10	3.8	3.648	0.0044	-2.5 to 2.5	Pass
		0	3.8	2.841	0.0034	-2.5 to 2.5	Pass
		10	3.8	1.356	0.0016	-2.5 to 2.5	Pass
		30	3.8	1.743	0.0021	-2.5 to 2.5	Pass
		40	3.8	1.453	0.0018	-2.5 to 2.5	Pass
		50	3.8	3.229	0.0039	-2.5 to 2.5	Pass
	836.6	20	3.23	2.163	0.0026	-2.5 to 2.5	Pass
			3.8	-1.776	-0.0021	-2.5 to 2.5	Pass
			4.37	2.712	0.0032	-2.5 to 2.5	Pass
		-30	3.8	-2.357	-0.0028	-2.5 to 2.5	Pass
		-20	3.8	-0.484	-0.0006	-2.5 to 2.5	Pass
		-10	3.8	3.035	0.0036	-2.5 to 2.5	Pass
		0	3.8	5.650	0.0068	-2.5 to 2.5	Pass
		10	3.8	1.421	0.0017	-2.5 to 2.5	Pass
		30	3.8	3.229	0.0039	-2.5 to 2.5	Pass
		40	3.8	2.841	0.0034	-2.5 to 2.5	Pass
		50	3.8	1.195	0.0014	-2.5 to 2.5	Pass
	848.8	20	3.23	0.807	0.0010	-2.5 to 2.5	Pass
			3.8	2.841	0.0033	-2.5 to 2.5	Pass
			4.37	10.977	0.0129	-2.5 to 2.5	Pass
		-30	3.8	-0.291	-0.0003	-2.5 to 2.5	Pass
		-20	3.8	7.716	0.0091	-2.5 to 2.5	Pass
		-10	3.8	5.424	0.0064	-2.5 to 2.5	Pass
		0	3.8	4.391	0.0052	-2.5 to 2.5	Pass
		10	3.8	1.453	0.0017	-2.5 to 2.5	Pass
		30	3.8	6.102	0.0072	-2.5 to 2.5	Pass
		40	3.8	1.743	0.0021	-2.5 to 2.5	Pass
		50	3.8	6.522	0.0077	-2.5 to 2.5	Pass


3. Modulation Characteristics


3.1 GSM850

3.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Modulation Characteristics		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	836.6	Refer To Test Graph		Pass
	GPRS	1 TX Slot	836.6	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	836.6	Refer To Test Graph		Pass

3.1.2 Test Graph

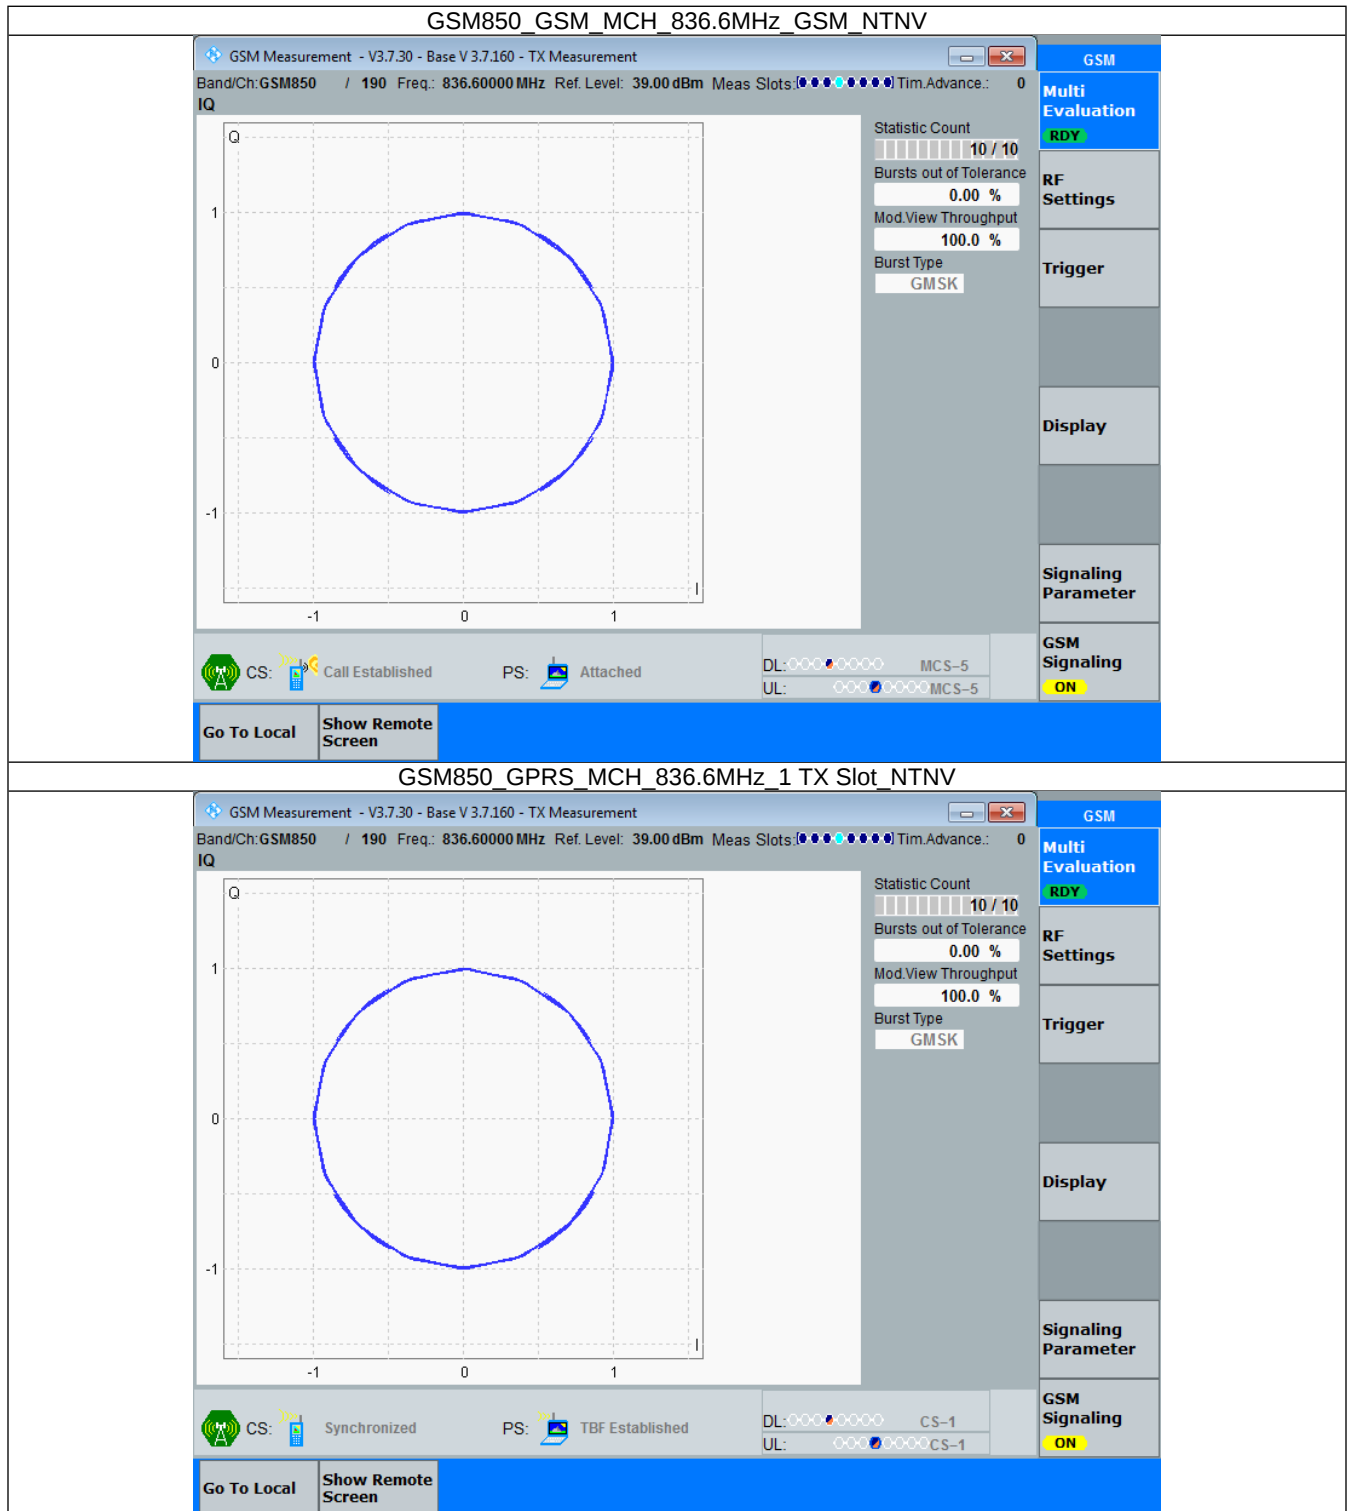

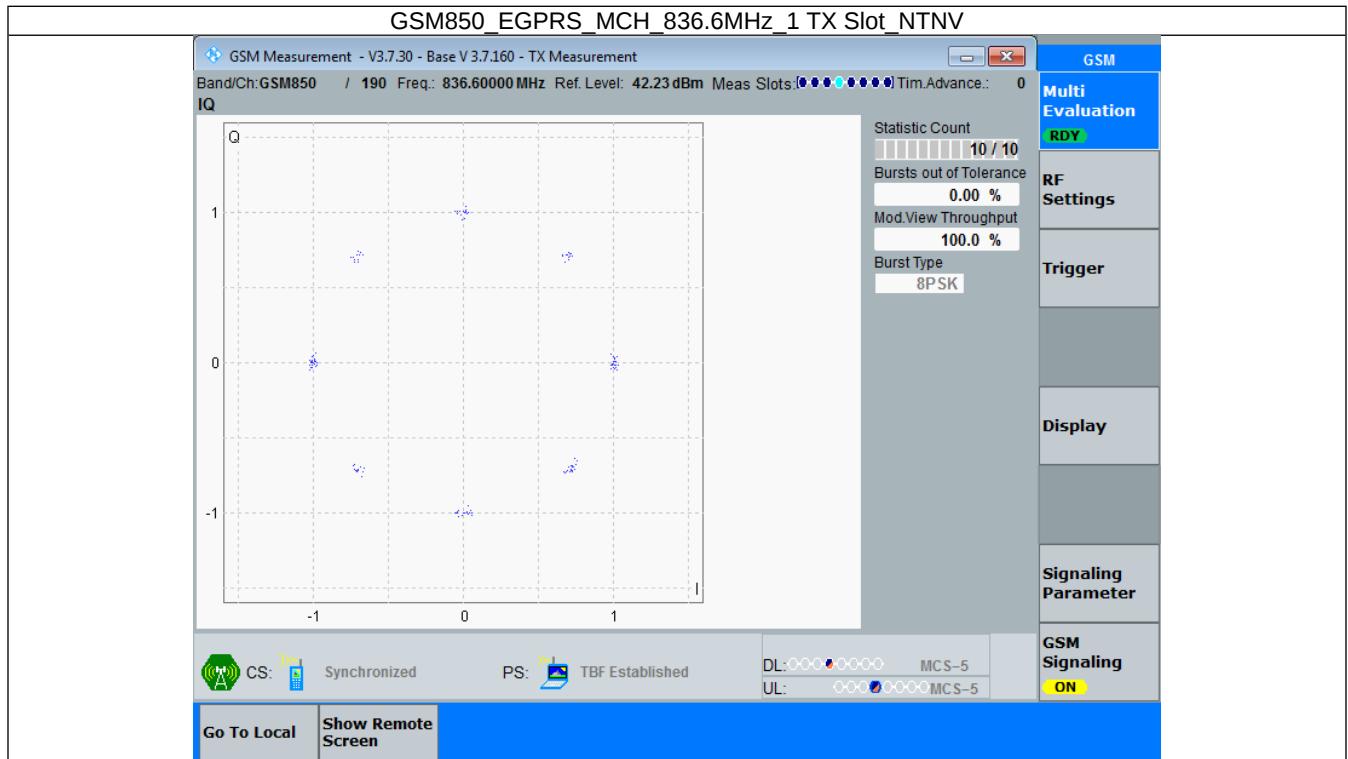


4. 99% & 26dB Bandwidth

4.1 GSM850_OBW


4.1.1 Test Result

Band: GSM850					
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.246	Pass
			836.6	0.249	Pass
			848.8	0.247	Pass
	GPRS	1 TX Slot	824.2	0.245	Pass
			836.6	0.239	Pass
			848.8	0.242	Pass
	EGPRS	1 TX Slot	824.2	0.239	Pass
			836.6	0.245	Pass
			848.8	0.236	Pass


4.1.2 Test Graph

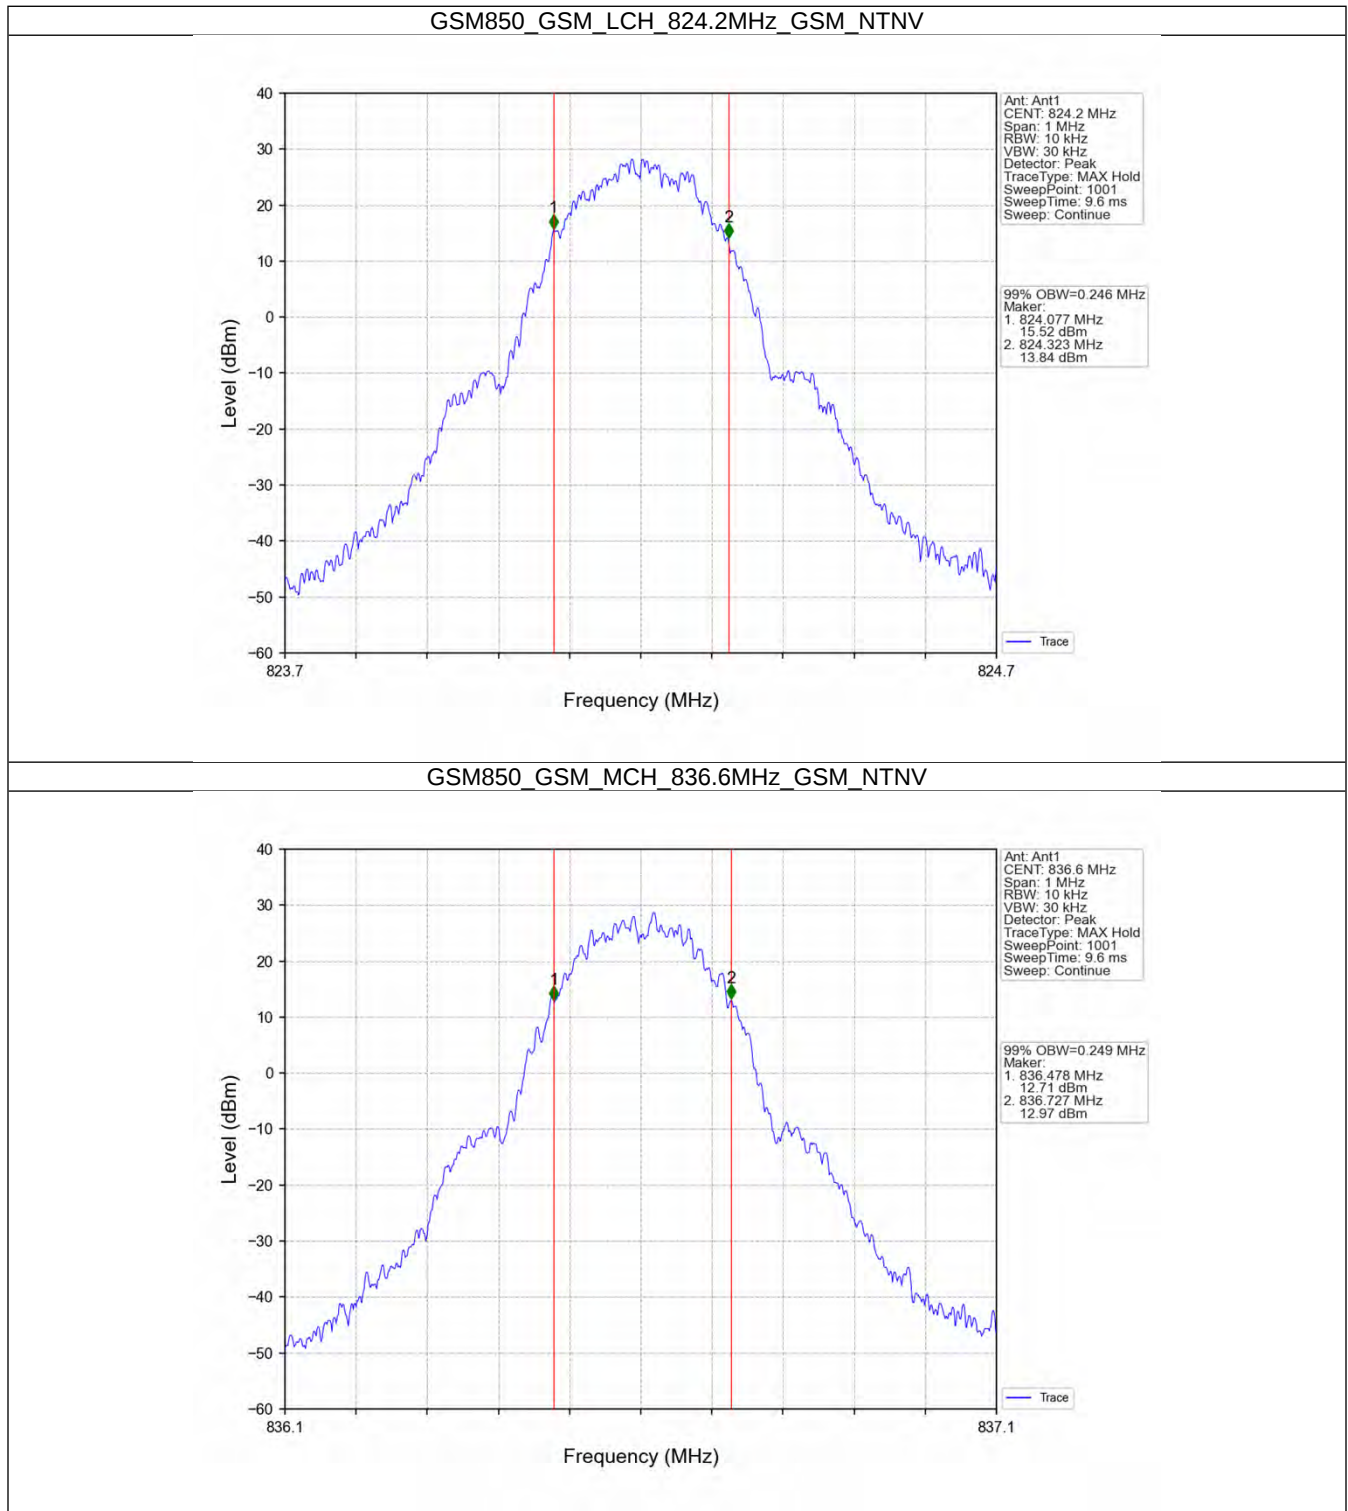


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

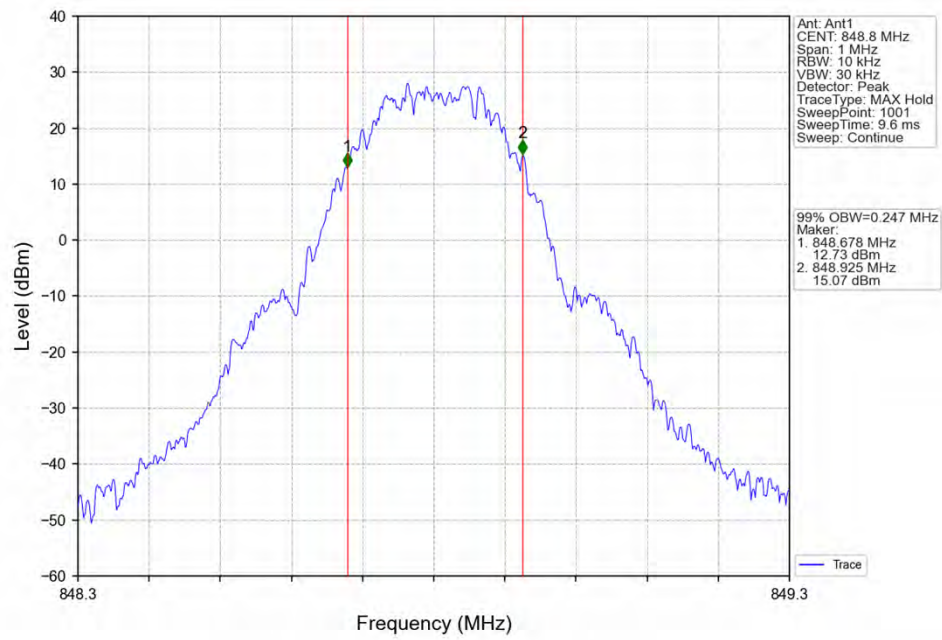


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

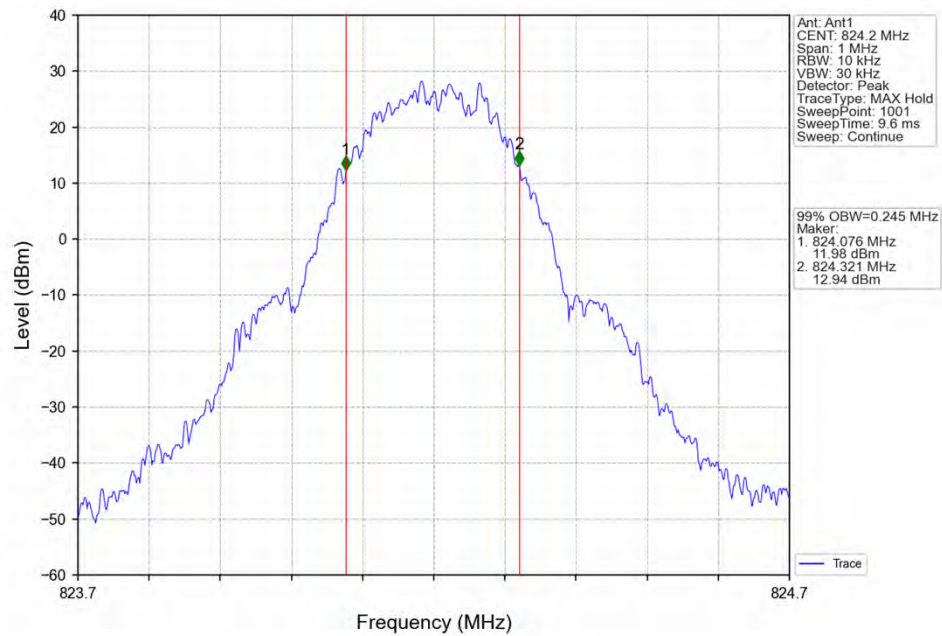


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

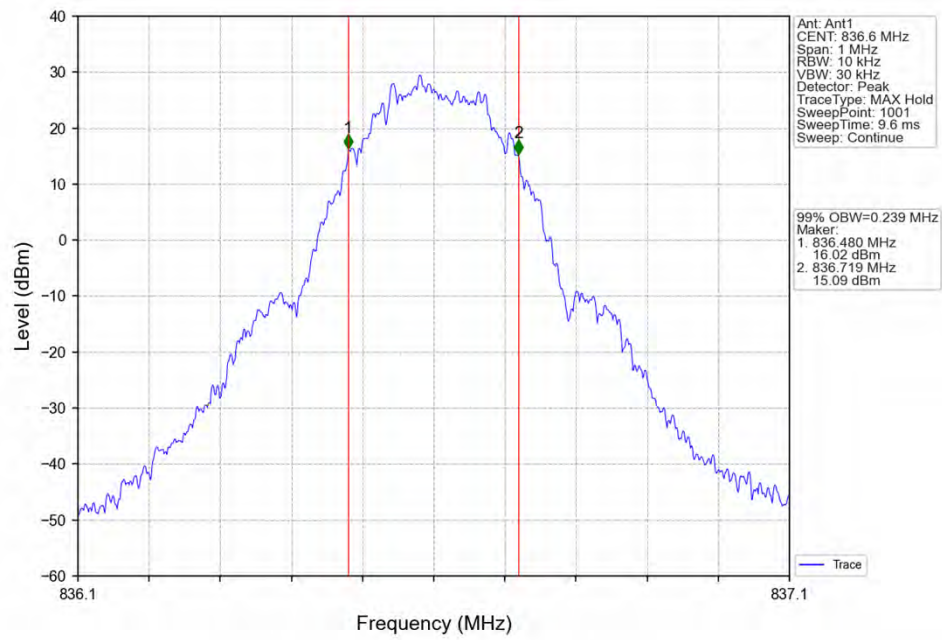


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

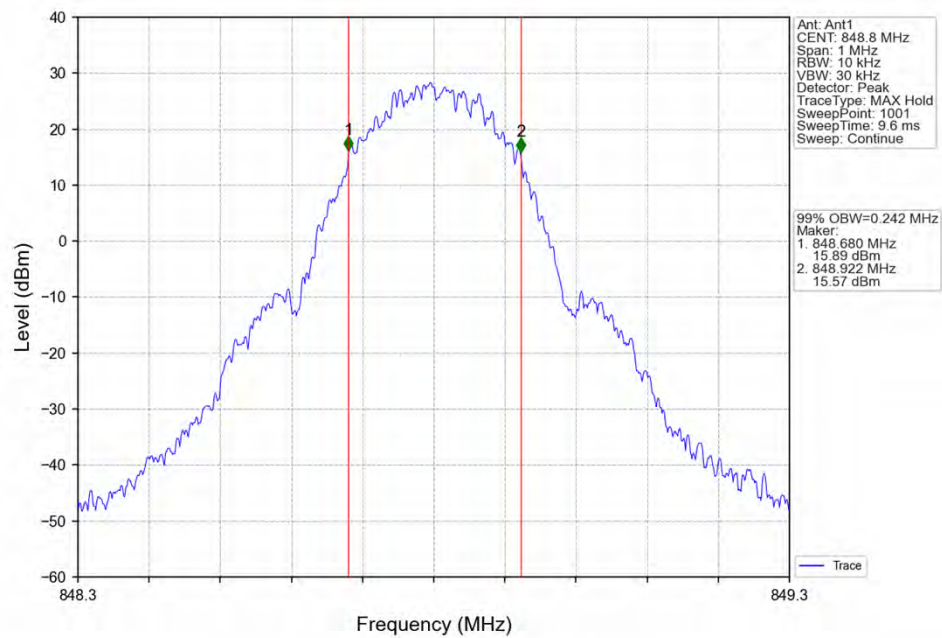


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

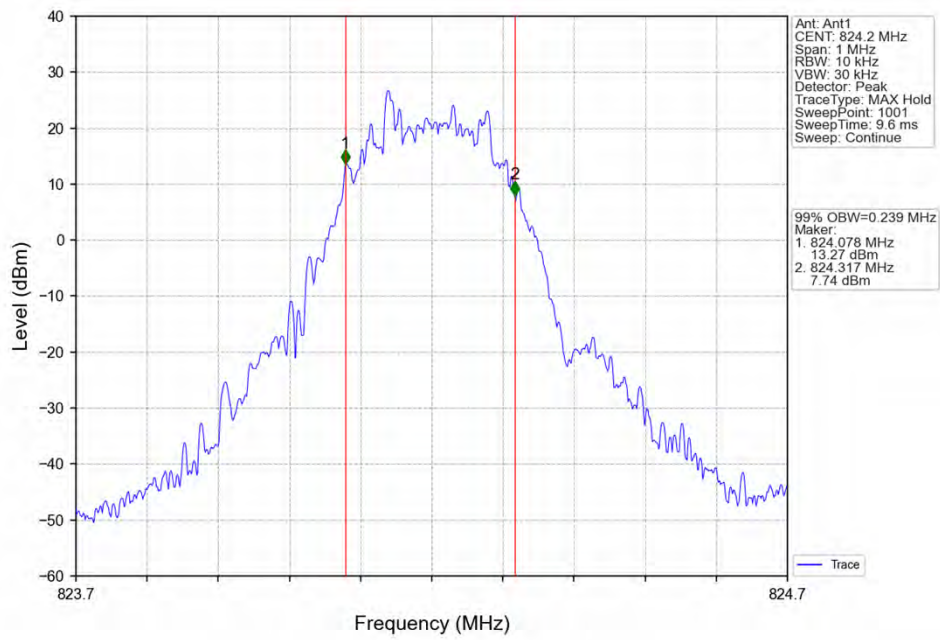

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

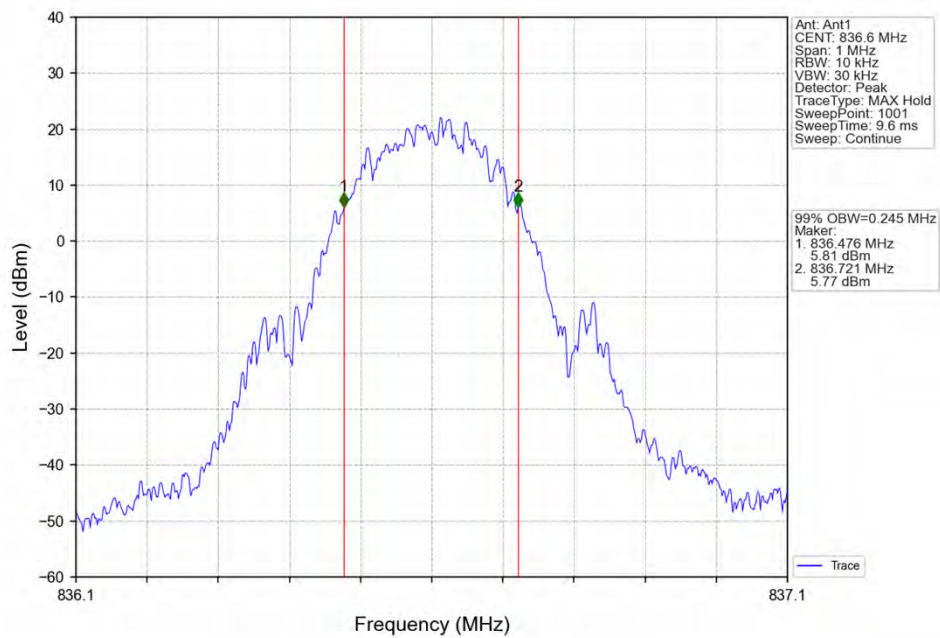

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

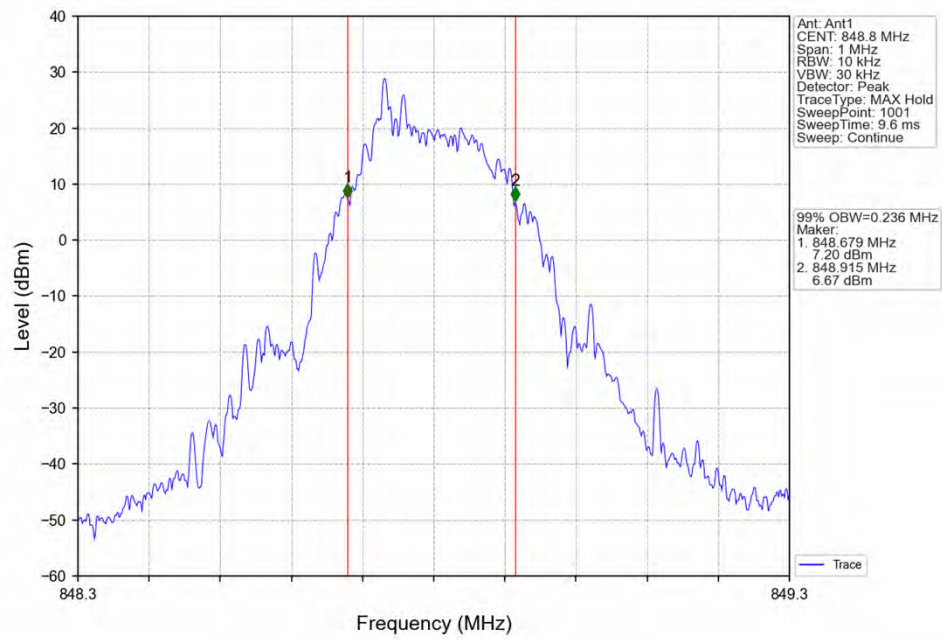


4.2 GSM850_XDB


4.2.1 Test Result

Band: GSM850					
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.317	Pass
			836.6	0.318	Pass
			848.8	0.315	Pass
	GPRS	1 TX Slot	824.2	0.321	Pass
			836.6	0.306	Pass
			848.8	0.318	Pass
	EGPRS	1 TX Slot	824.2	0.290	Pass
			836.6	0.311	Pass
			848.8	0.286	Pass


4.2.2 Test Graph

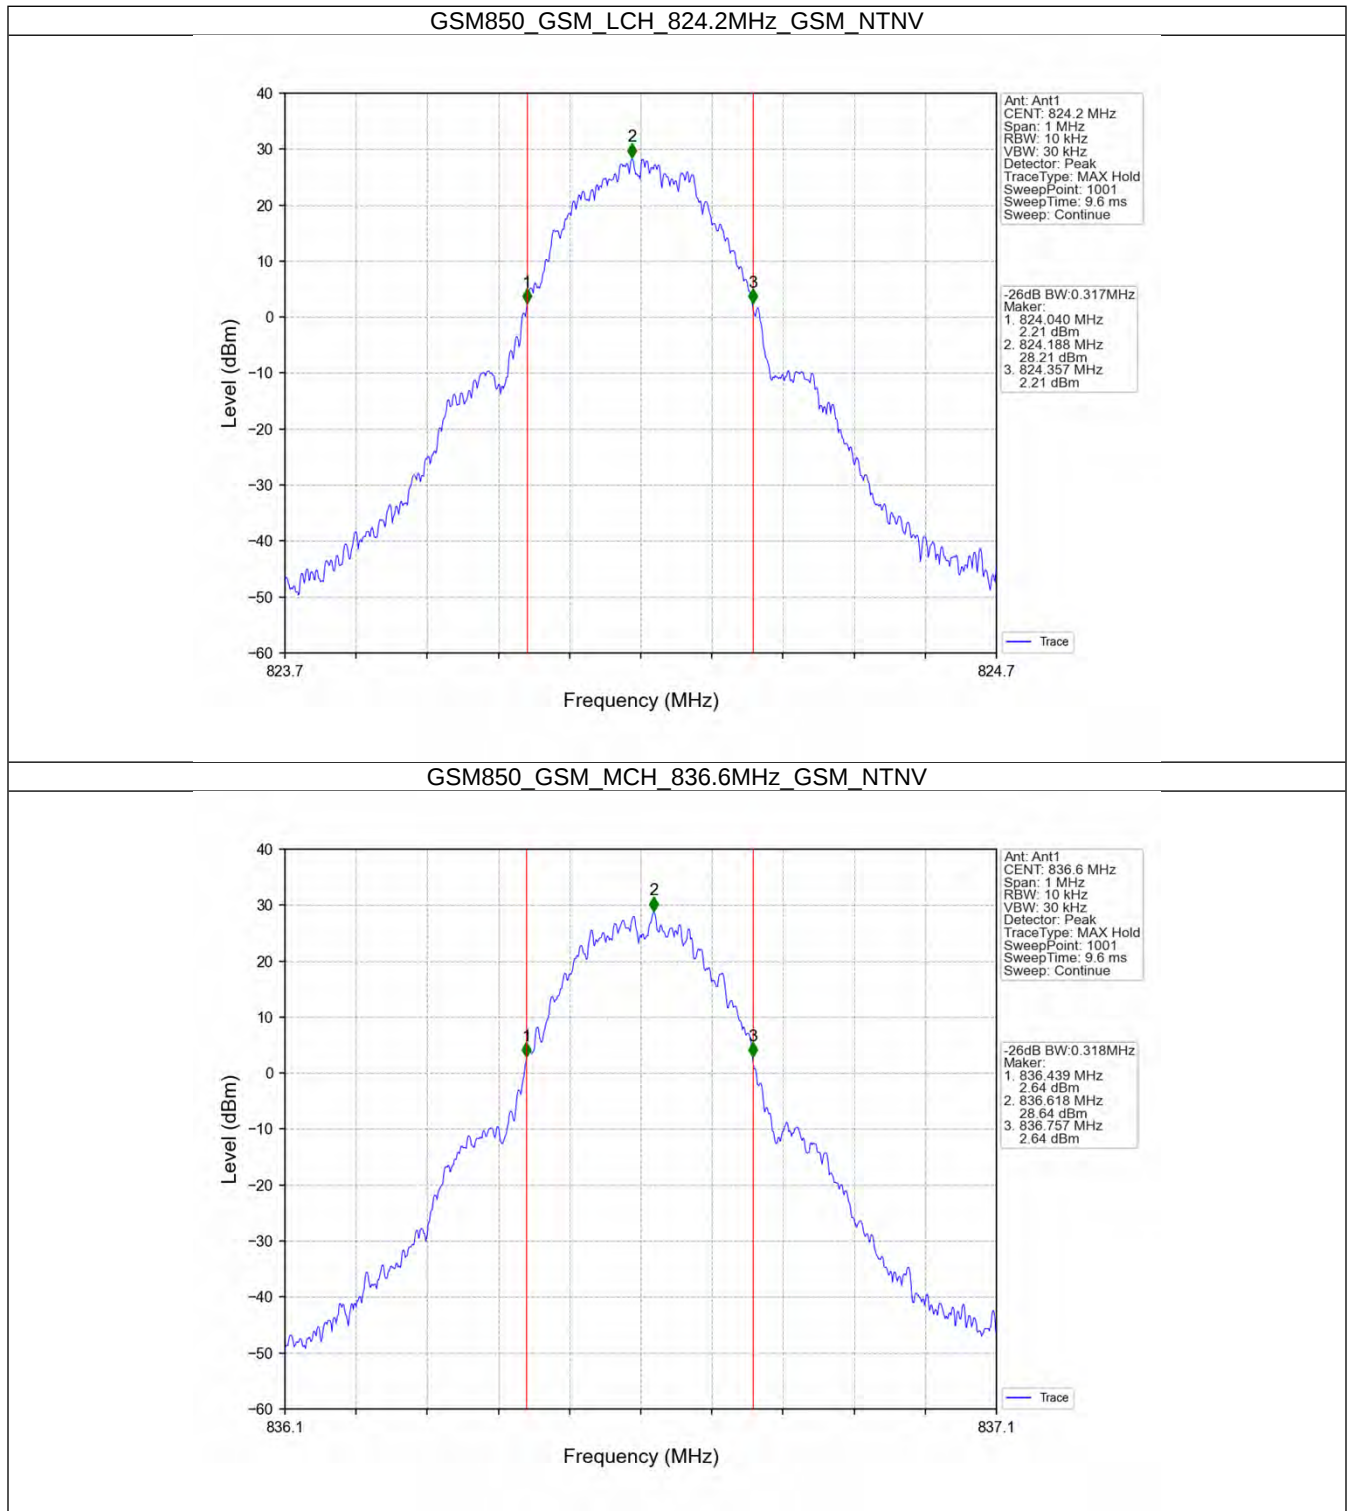


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

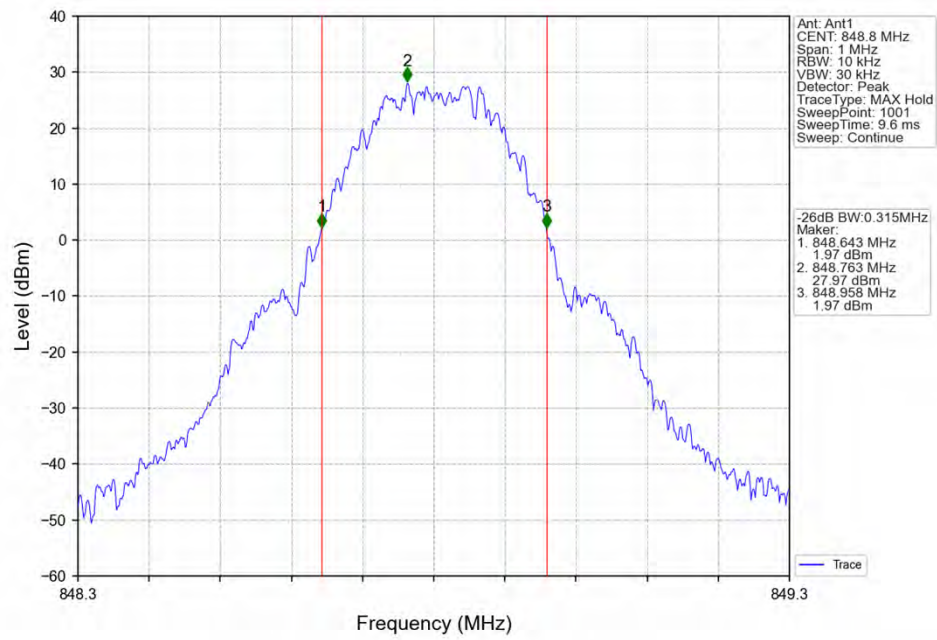


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

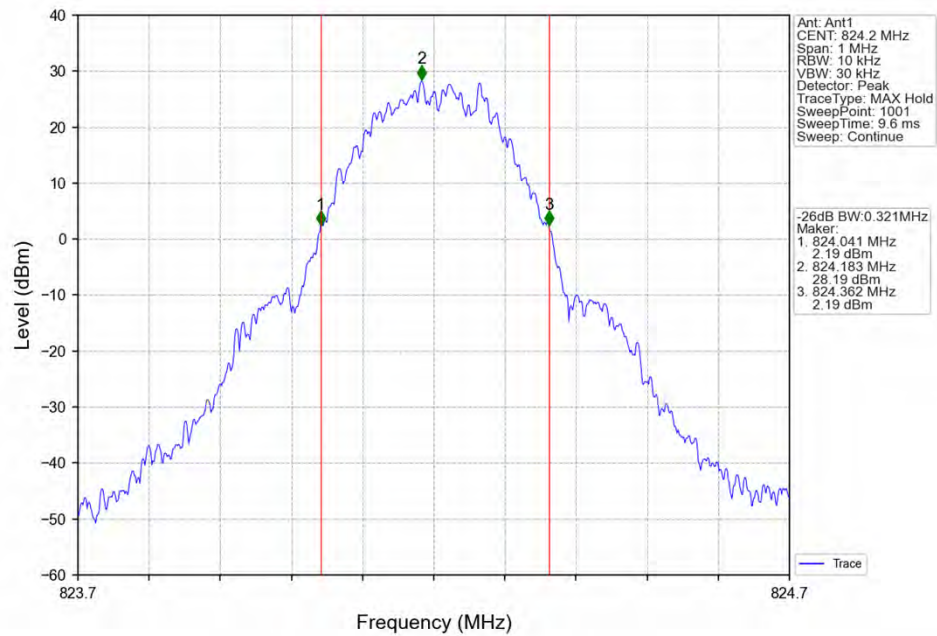


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

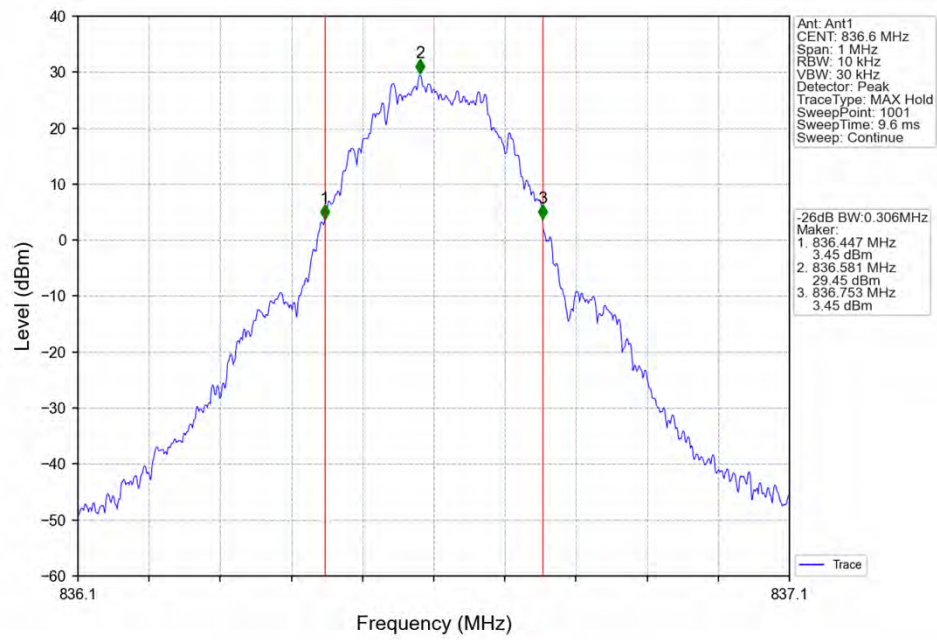


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

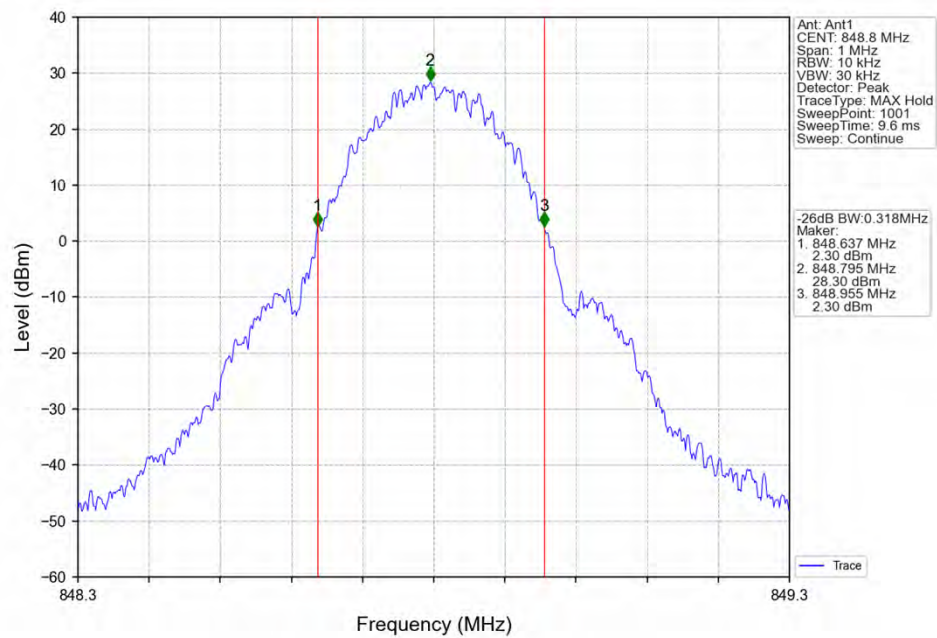


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

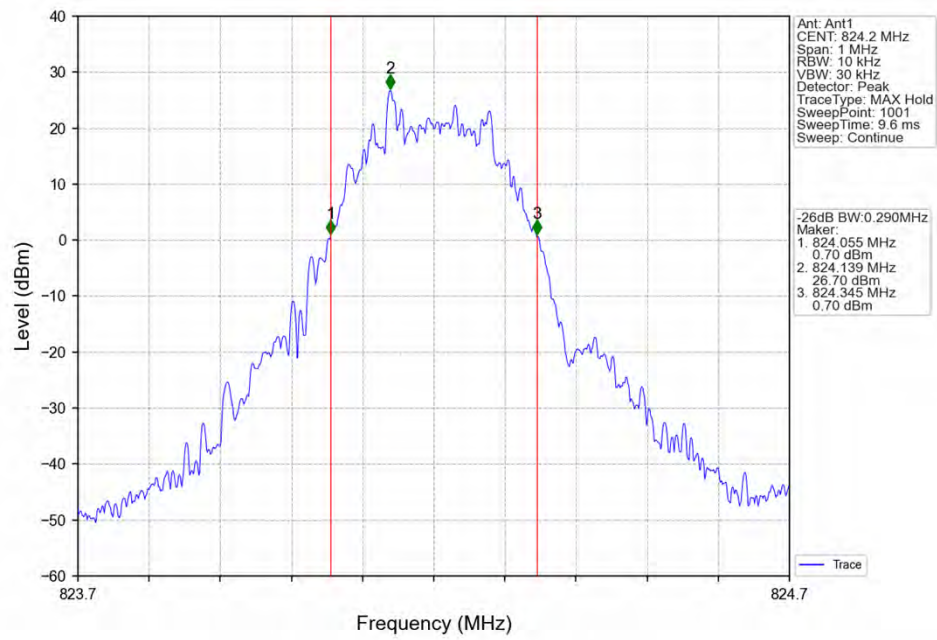

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

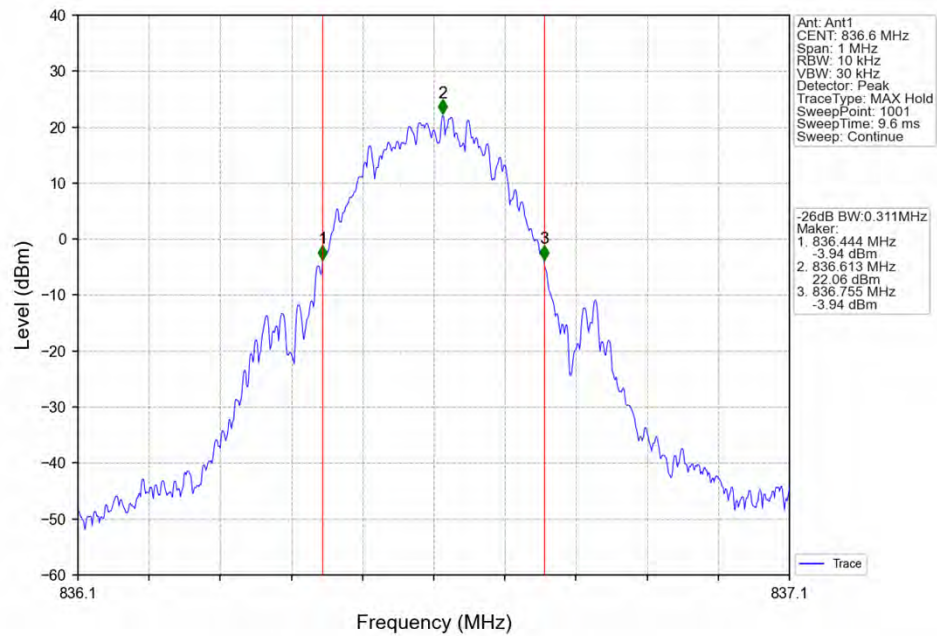

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

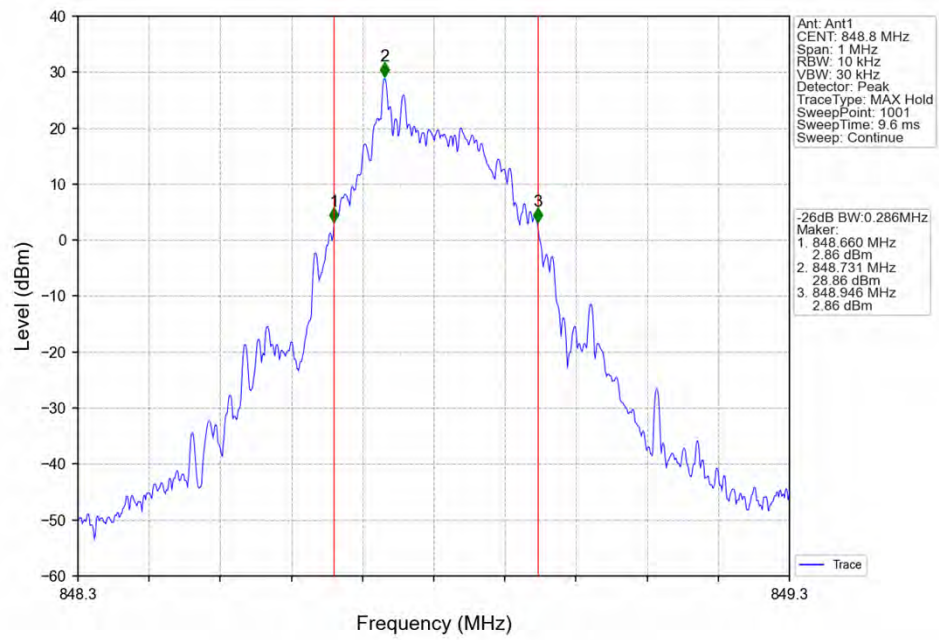


5. Peak-Average Ratio

5.1 GSM850


5.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	8.96	<=13	Pass
			836.6	9.18	<=13	Pass
			848.8	9.11	<=13	Pass
	GPRS	4 TX Slots	824.2	9.13	<=13	Pass
			836.6	3.84	<=13	Pass
			848.8	3.44	<=13	Pass
	EGPRS	4 TX Slots	824.2	12.28	<=13	Pass
			836.6	10.74	<=13	Pass
			848.8	11.31	<=13	Pass


5.1.2 Test Graph

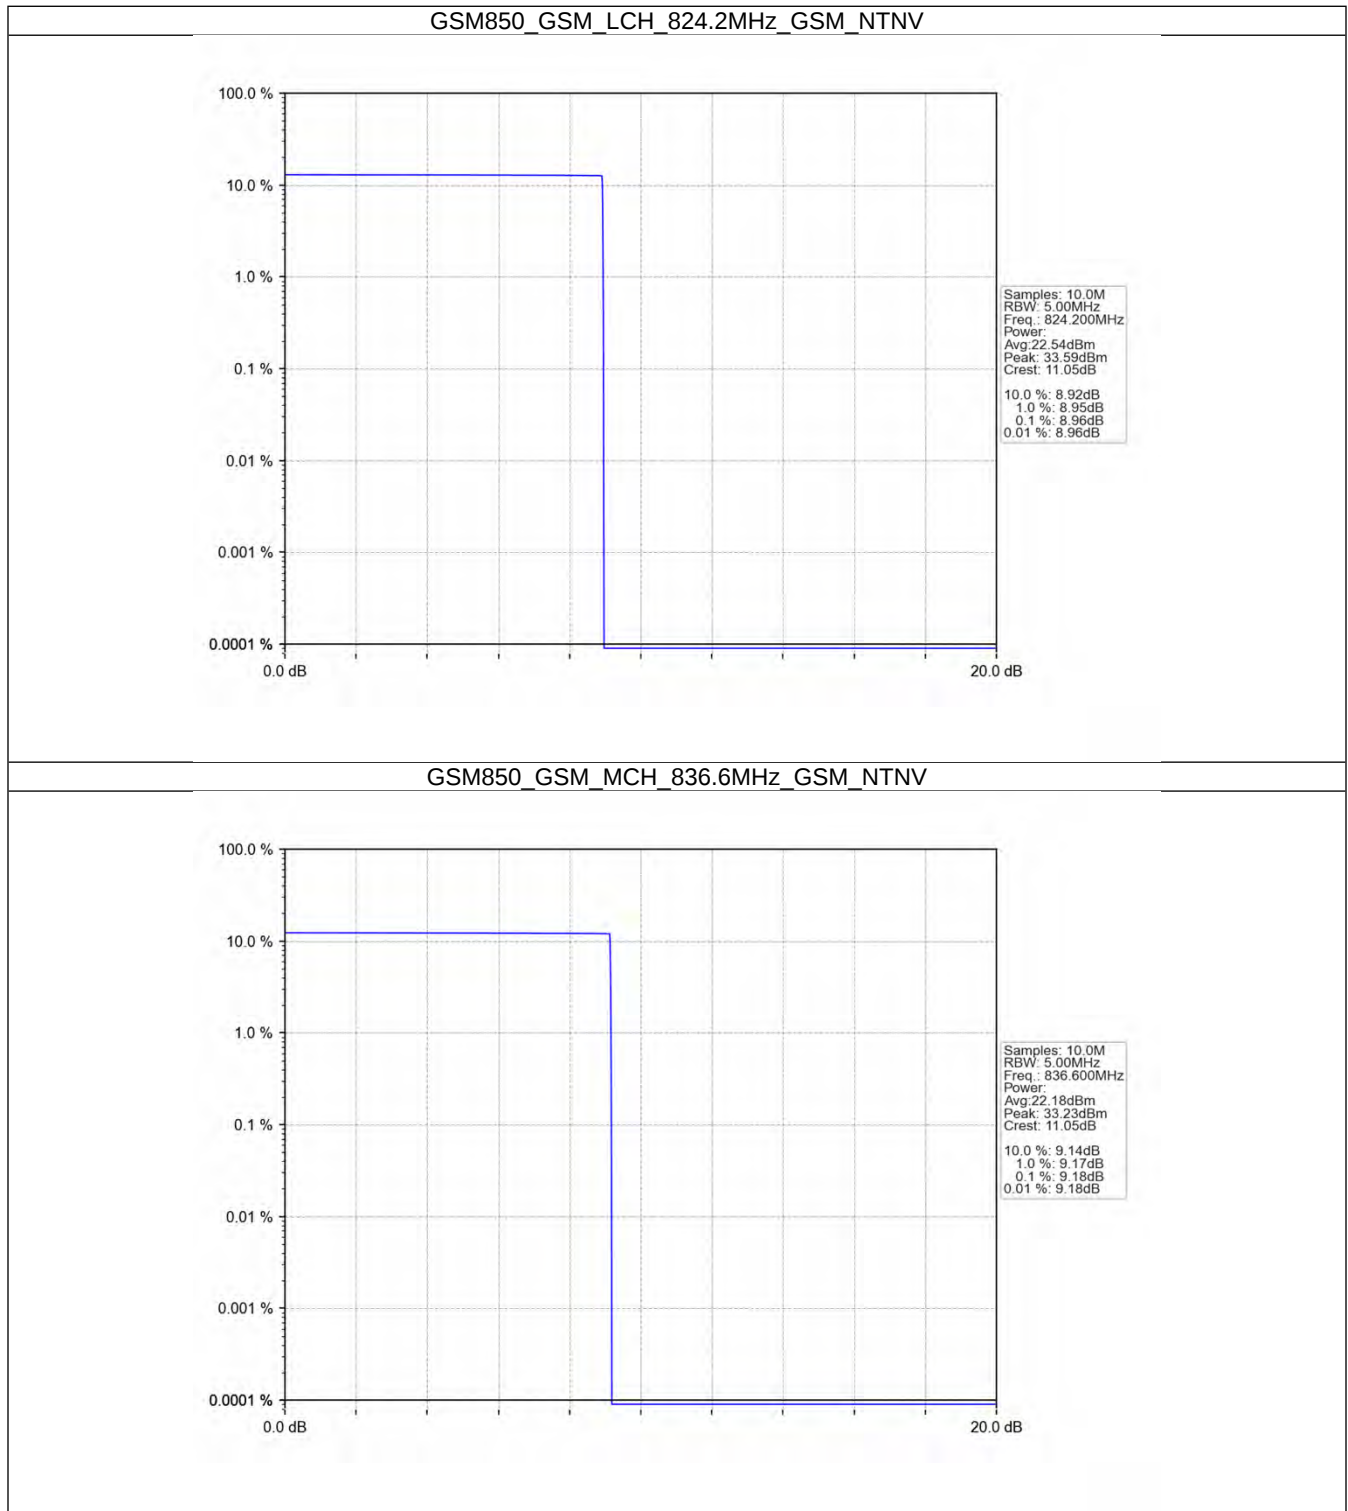


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

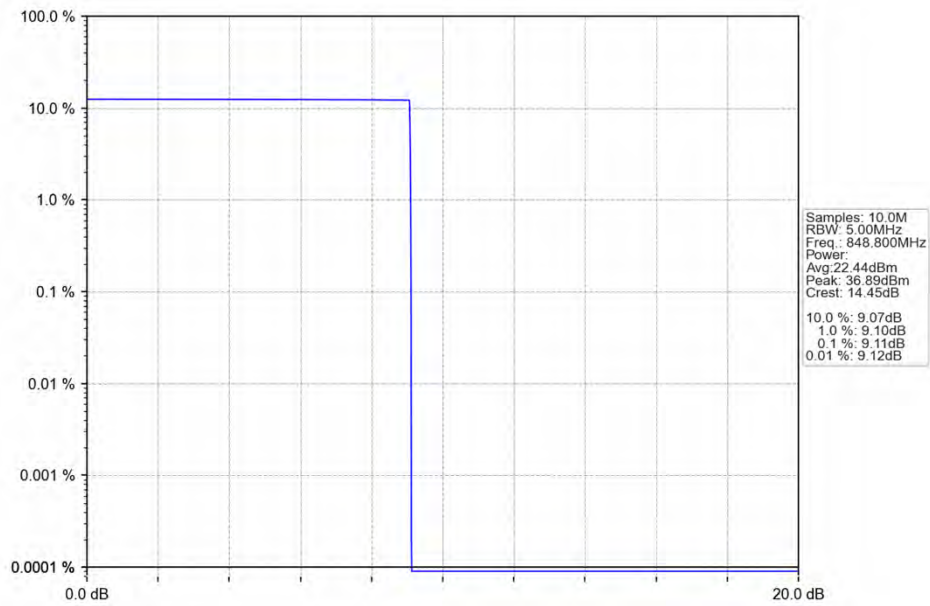


GSM850_GPRS_LCH_824.2MHz_4 TX Slots_NTNV

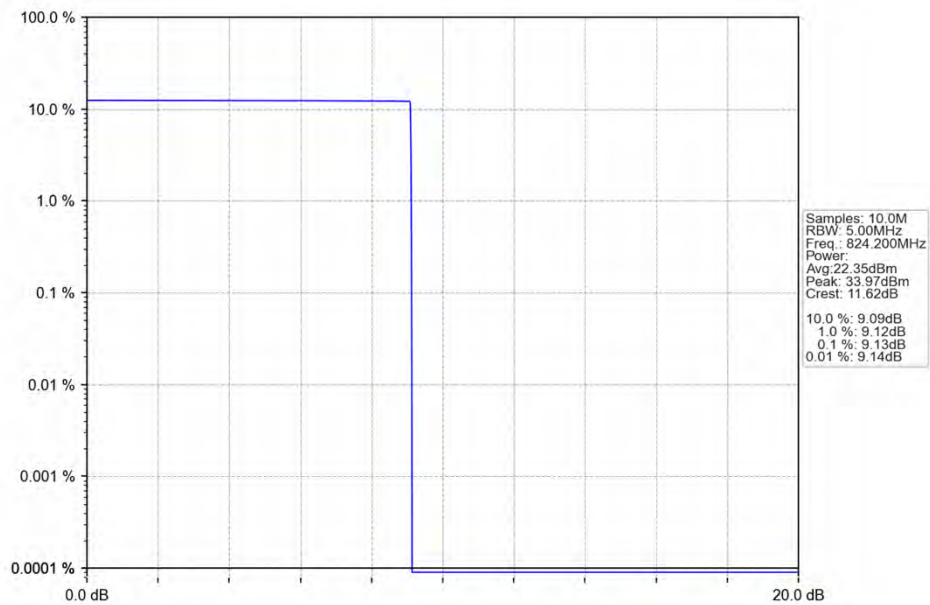


GSM850_GPRS_MCH_836.6MHz_4 TX Slots_NTNV

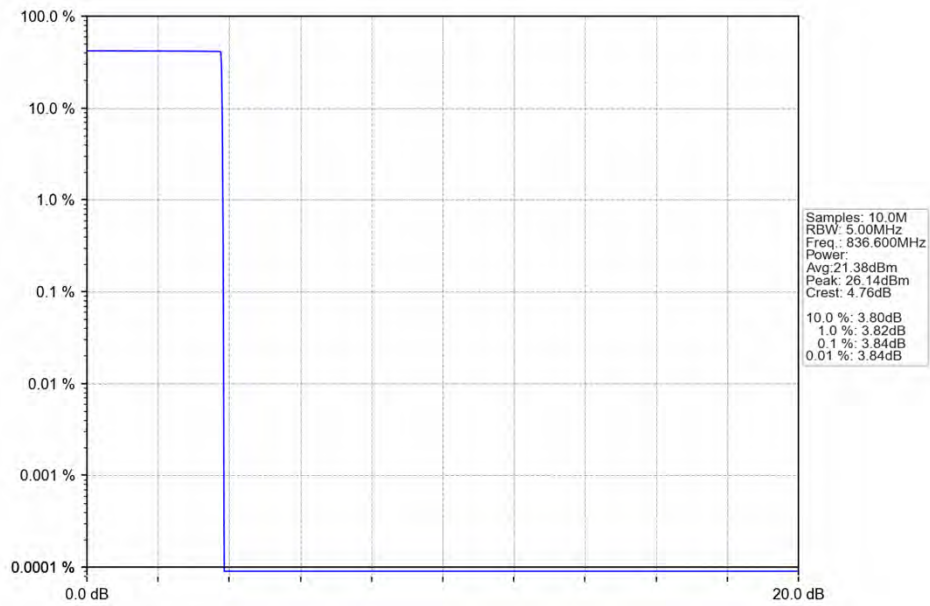


GSM850_GPRS_HCH_848.8MHz_4 TX Slots_NTNV

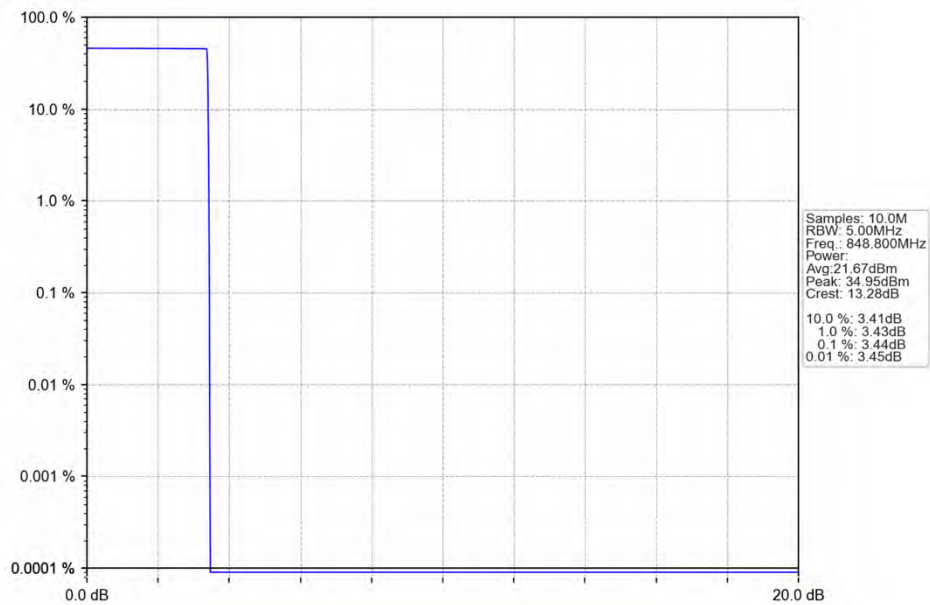

GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

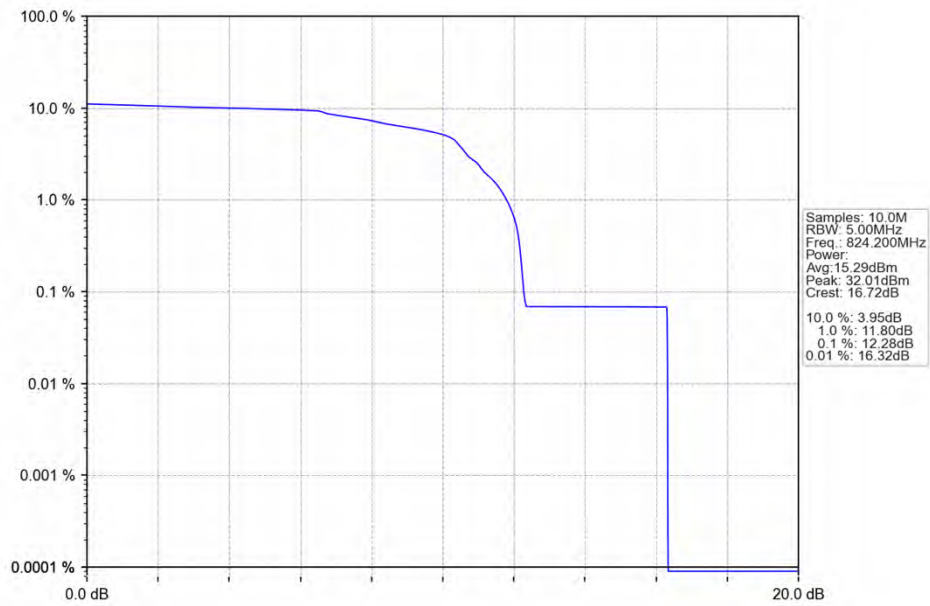

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

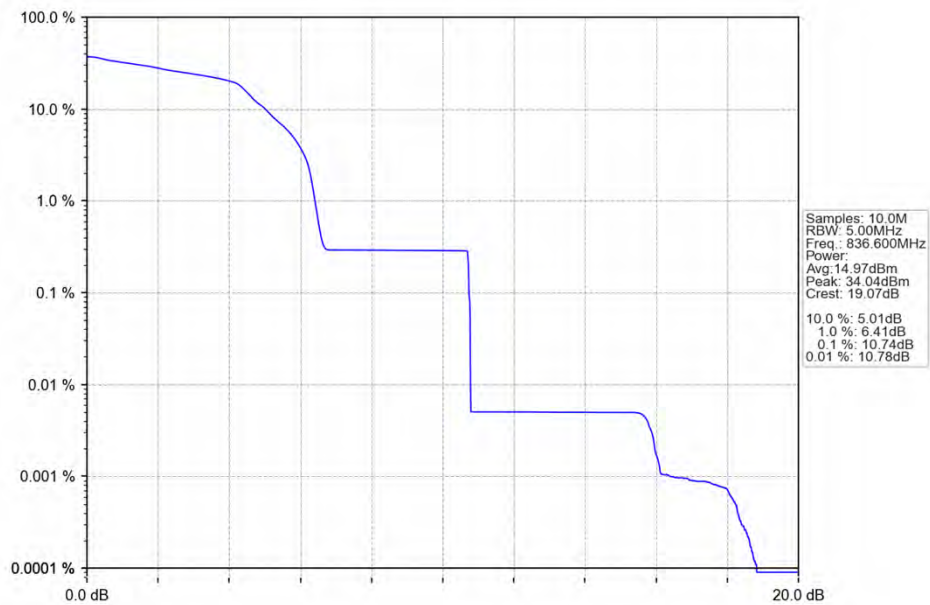




6. Spurious Emission

6.1 GSM850


6.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	GPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass


6.1.2 Test Graph

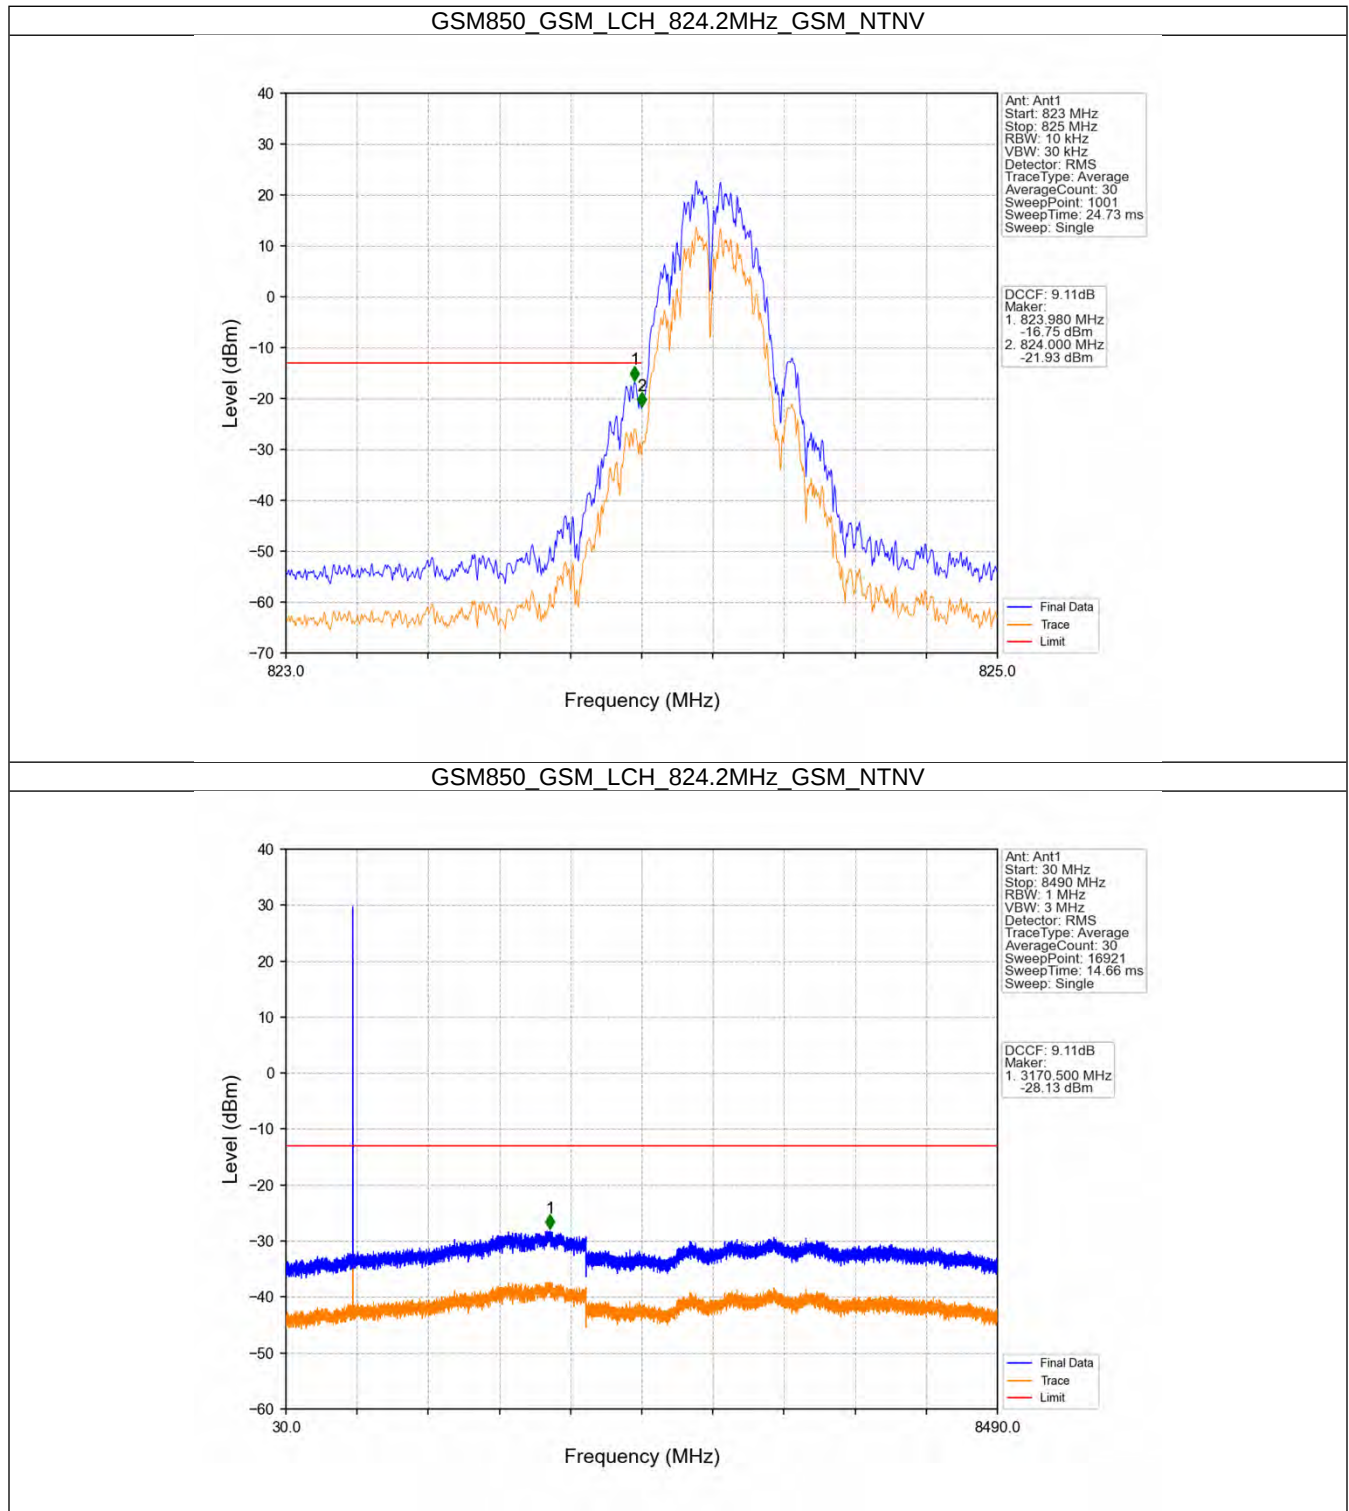


GSM850_GSM_MCH_836.6MHz_GSM_NTNV

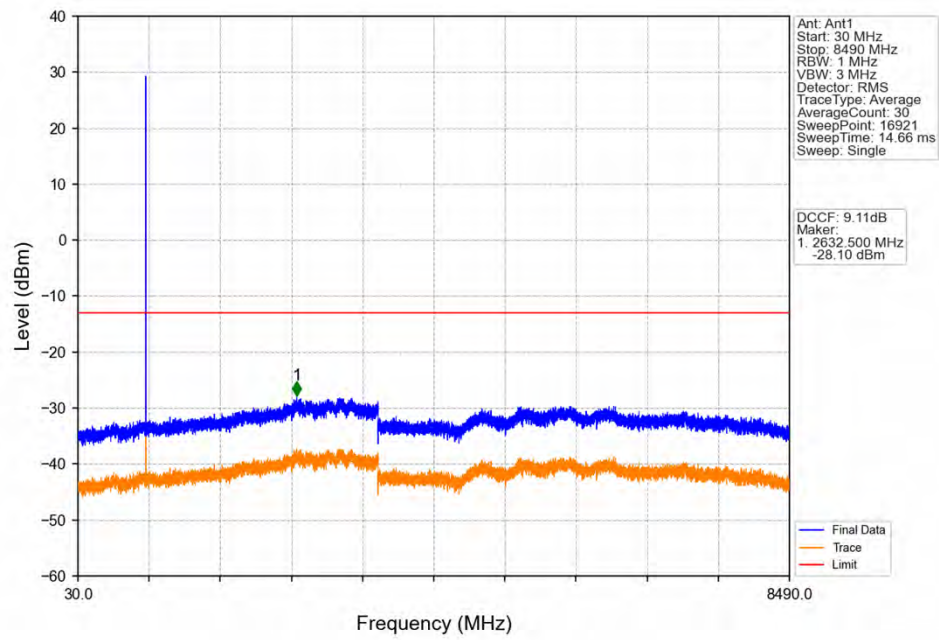


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

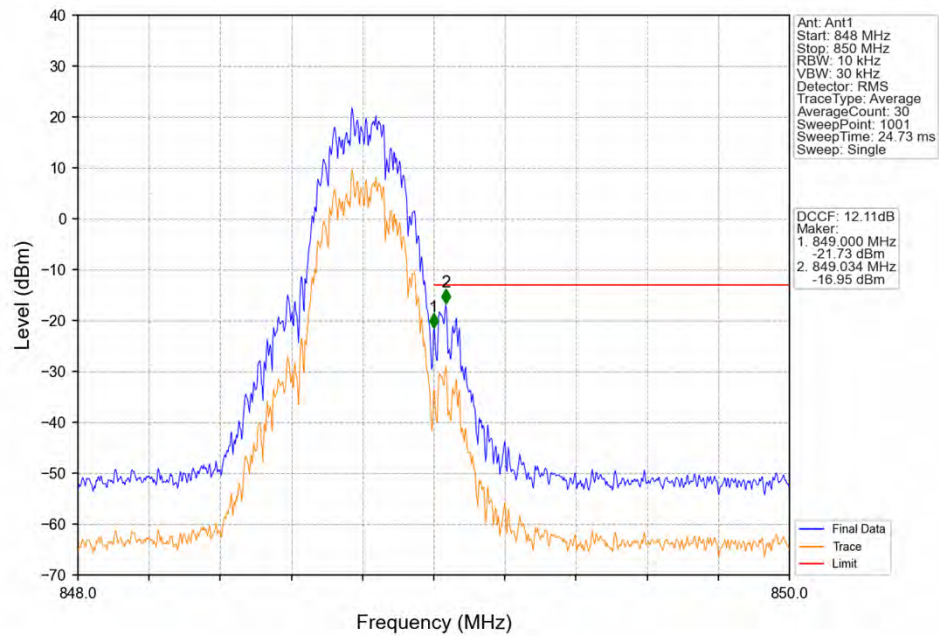


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

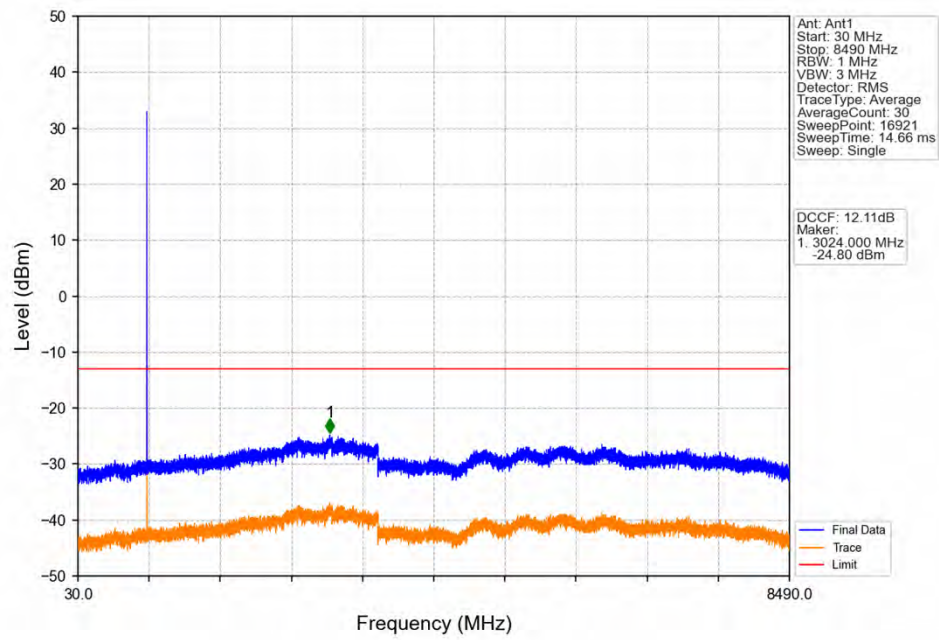


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

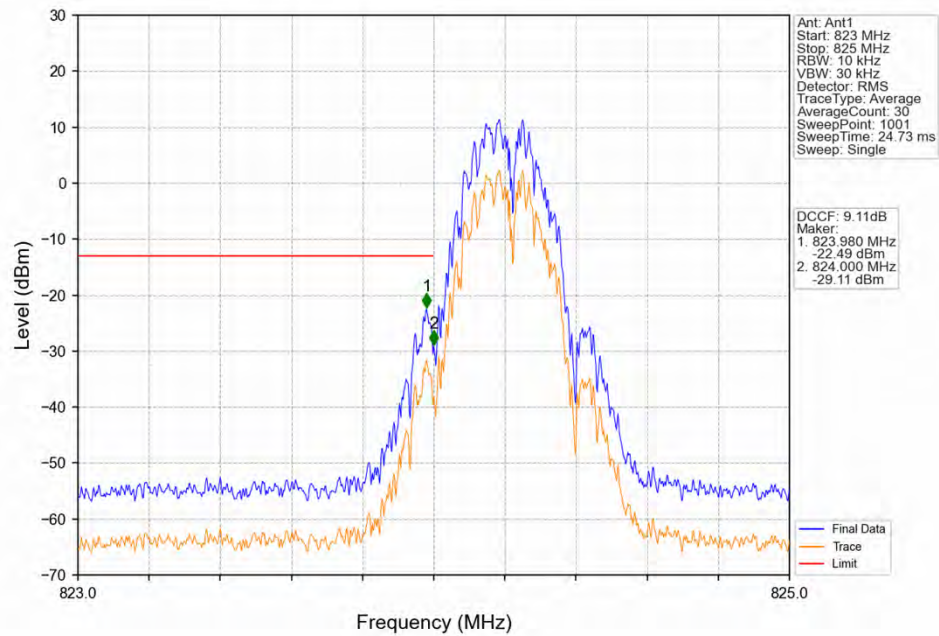


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

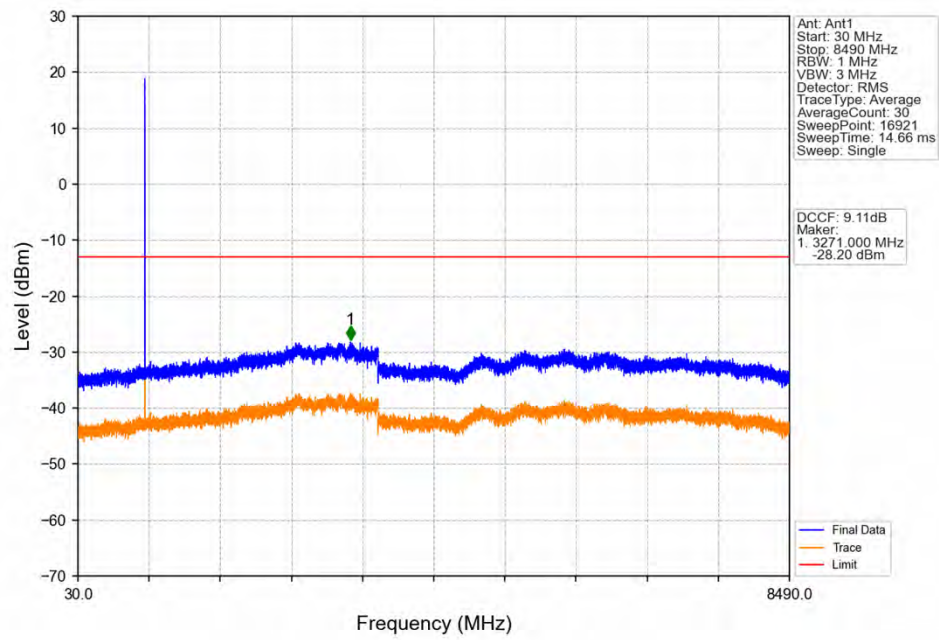


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

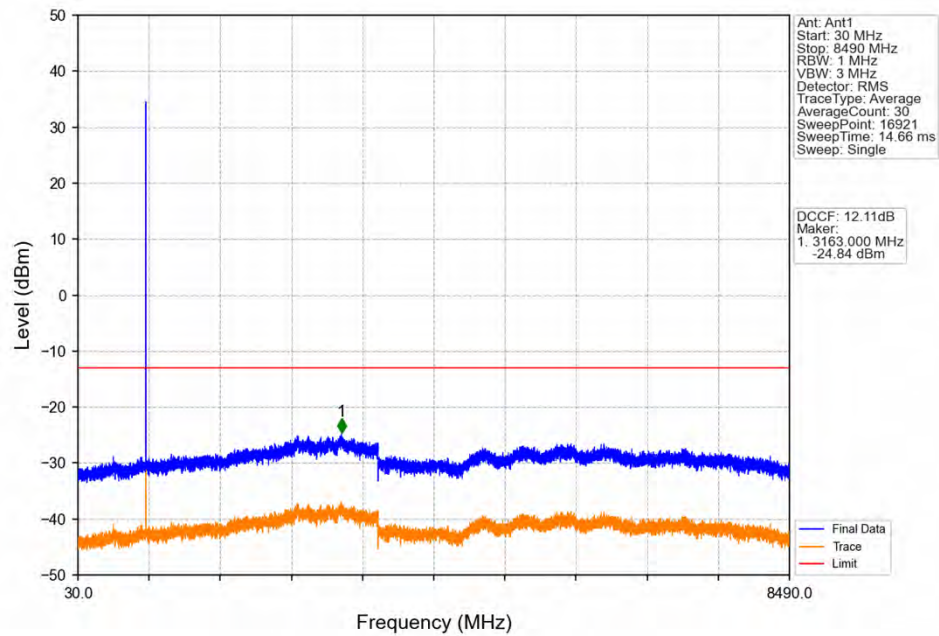


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

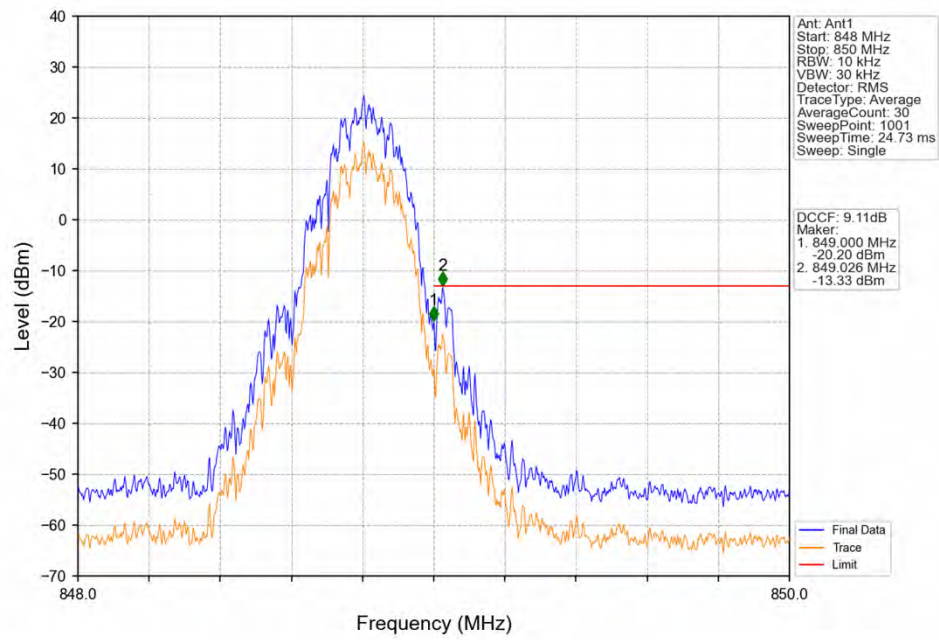


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

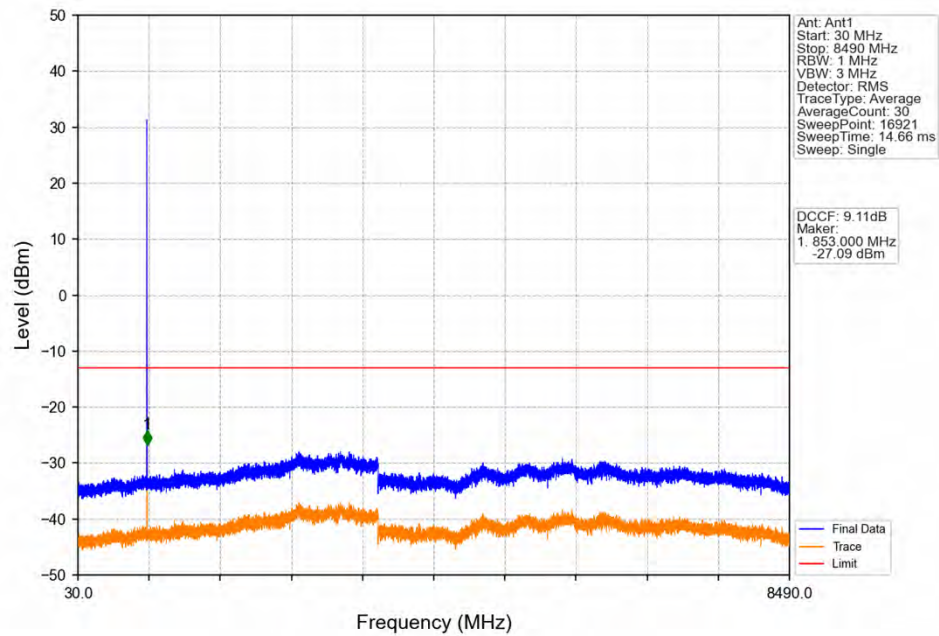


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

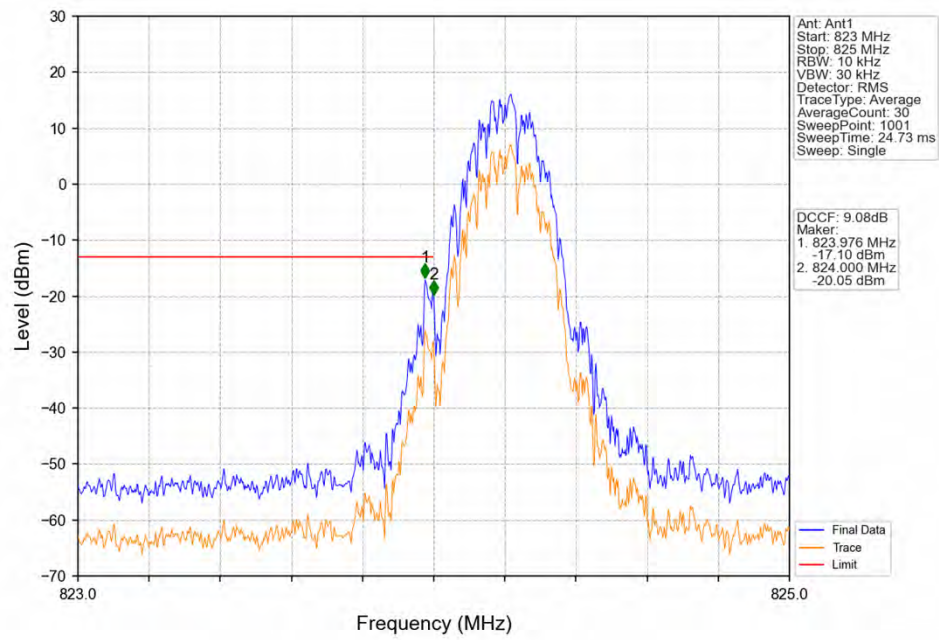


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

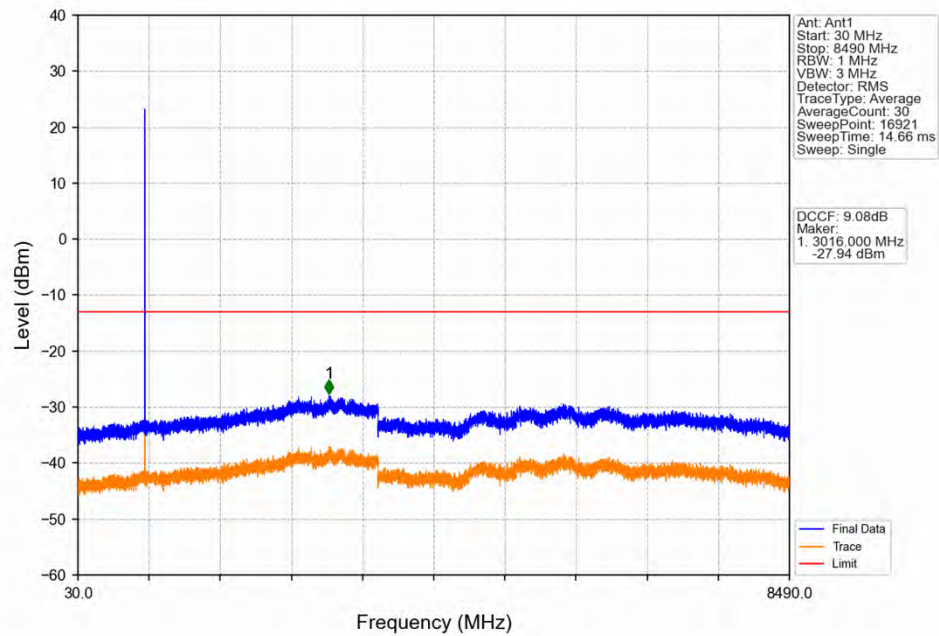


GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

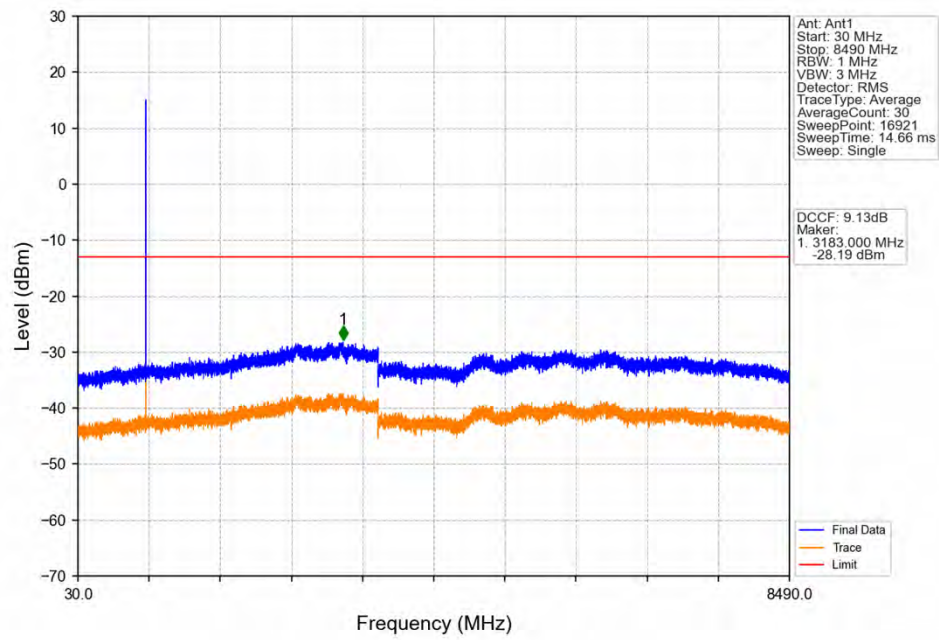

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

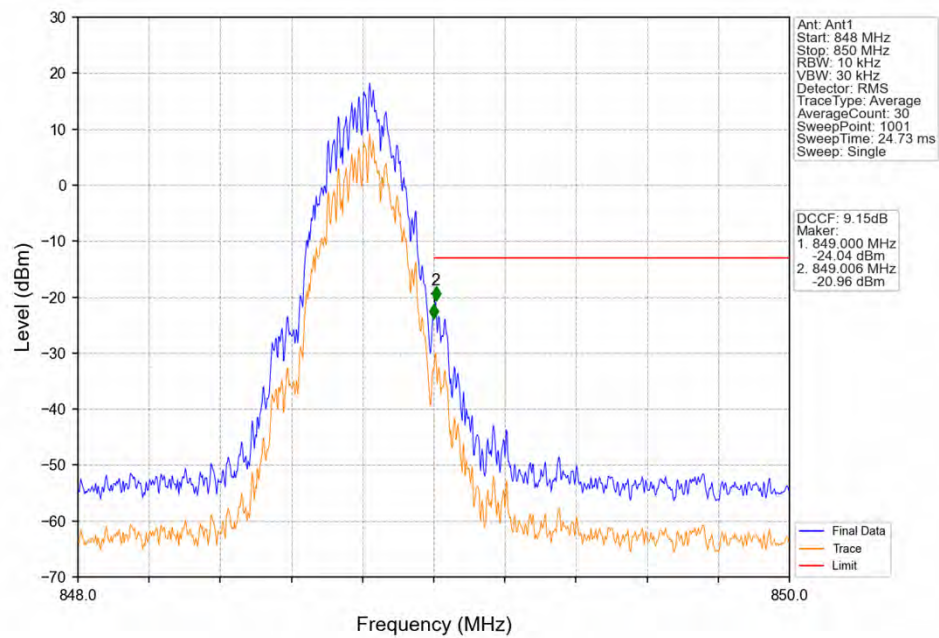

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

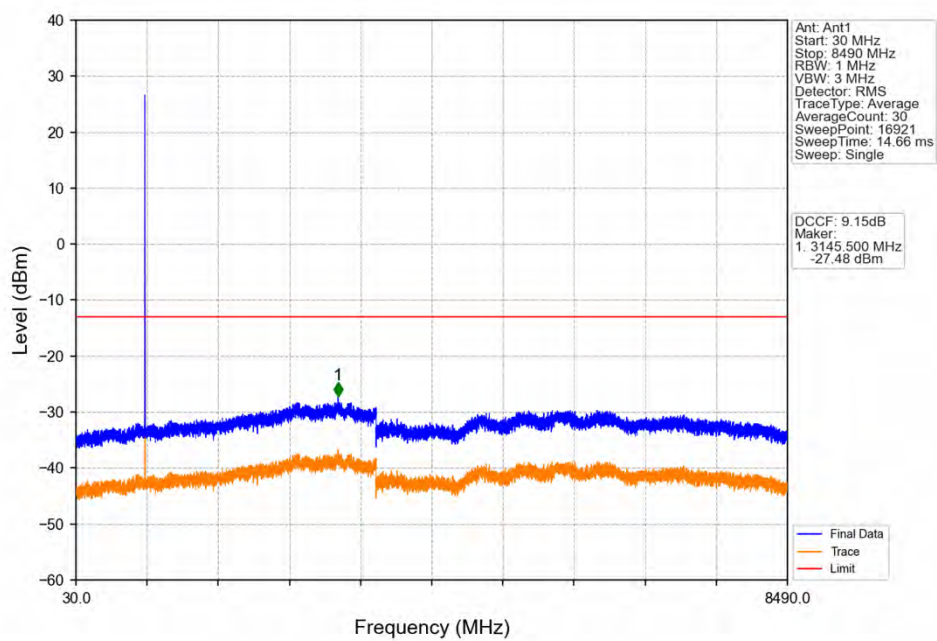

7. Form731

7.1 Form731_Power

7.1.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.3964	0.0223	ppm	249KGXW	22H	31.45
GSM850	0.2	824.2	848.8	0.2582	0.0129	ppm	245KG7W	22H	24.12

7.2 Form731_ERP

7.2.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	0.8279	0.0223	ppm	249KGXW	22H	29.18
GSM850	0.2	824.2	848.8	0.1531	0.0129	ppm	245KG7W	22H	21.85