

RF Test Report

For

Applicant Name: Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address: B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
EUT Name: Tablet
Brand Name: DOOGEE
Model Number: Tab E3+
Series Model Number: Tab E3+ VIP Edition, Tab E3, Tab E3 VIP Edition, Tab E3 Play, Tab E3 Play VIP Edition
FCC ID: 2AX4YTABE3

Issued By

| | |
|--------------------------------|---|
| Company name: | BTF Testing Lab (Shenzhen) Co., Ltd. |
| Address: | 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China |
| Report number: | BTF250514R00605 |
| Test standards: | FCC CFR Title 47 Part 2 FCC CFR Title 47 Part 22 SubPart H FCC CFR Title 47 Part 24 SubPart E FCC CFR Title 47 Part 27 SubPart C FCC CFR Title 47 Part 90 SubPart S |
| Test conclusion: | Pass |
| Date of sample receipt: | 2025-03-03 |
| Test date: | 2025-03-03 to 2025-06-02 |
| Date of issue: | 2025-06-03 |
| Test by: | Song He |

Prepared by:

Sean He / Tester

Sean He / Tester

Chris Liu

Chris
engineer

Liu/Project*

5

A logo consisting of the word "Approved" in black text above a large green letter "B". Below the "B" is the word "LAB" in smaller green text.

Ryan.CJ /EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

| Revision History | | |
|------------------|------------|-------------------|
| Version | Issue date | Revisions content |
| R_V0 | 2025-06-03 | Original |
| | | |

Note:
Once the revision has been made, then previous versions reports are invalid.

Table of Contents

| | | |
|----------|---|-----------|
| 1 | Introduction..... | 5 |
| 1.1 | Laboratory Location | 5 |
| 1.2 | Laboratory Facility | 5 |
| 1.3 | Announcement..... | 5 |
| 2 | Product Information | 6 |
| 2.1 | Application Information | 6 |
| 2.2 | Manufacturer Information..... | 6 |
| 2.3 | Factory Information..... | 6 |
| 2.4 | General Description of Equipment under Test (EUT)..... | 6 |
| 2.5 | Technical Information | 7 |
| 3 | Test Information | 9 |
| 3.1 | Test Standards..... | 9 |
| 3.2 | Summary of Test..... | 9 |
| 3.3 | Uncertainty of Test..... | 11 |
| 3.4 | Additions to, deviations, or exclusions from the method | 11 |
| 3.5 | Test Auxiliary Equipment..... | 11 |
| 3.6 | Test Equipment List | 11 |
| 4 | Test Configuration..... | 13 |
| 4.1 | Environment Condition | 13 |
| 4.2 | Test mode | 13 |
| 4.3 | Test Channel of EUT | 13 |
| 4.4 | Test procedure..... | 18 |
| 4.5 | Test Setup Block..... | 19 |
| 5 | Technical requirements specification | 20 |
| 5.1 | Transmitter Radiated Power (EIRP/ERP)..... | 20 |
| 5.1.1 | Limit | 20 |
| 5.1.2 | Test Setup..... | 20 |
| 5.1.3 | Test Procedure | 20 |
| 5.1.4 | Test Result..... | 21 |
| 5.2 | Peak to Average Ratio..... | 22 |
| 5.2.1 | Limit | 22 |
| 5.2.2 | Test Setup..... | 22 |
| 5.2.3 | Test Procedure | 22 |
| 5.2.4 | Test Result..... | 23 |
| 5.3 | Occupied Bandwidth..... | 24 |
| 5.3.1 | Limit | 24 |
| 5.3.2 | Test Setup..... | 24 |
| 5.3.3 | Test Procedure | 24 |
| 5.3.4 | Test Result..... | 25 |
| 5.4 | Frequency Stability | 26 |
| 5.4.1 | Limit | 26 |
| 5.4.2 | Test Setup..... | 27 |
| 5.4.3 | Test Procedure | 27 |
| 5.4.4 | Test Result..... | 27 |
| 5.5 | Spurious Emission at Antenna Terminals..... | 28 |
| 5.5.1 | Limit | 28 |
| 5.5.2 | Test Setup..... | 30 |
| 5.5.3 | Test Procedure | 30 |
| 5.5.4 | Test Result..... | 31 |
| 5.6 | Band Edge Emission | 32 |
| 5.6.1 | Limit | 32 |
| 5.6.2 | Test Setup..... | 34 |
| 5.6.3 | Test Procedure | 34 |

| | | |
|----------|--|-----------|
| 5.6.4 | Test Result..... | 35 |
| 5.7 | Field Strength of Spurious Radiation | 36 |
| 5.7.1 | Limit | 36 |
| 5.7.2 | Test Setup..... | 38 |
| 5.7.3 | Test Procedure | 38 |
| 5.7.4 | Test Result..... | 40 |
| 6 | Test Setup Photos..... | 69 |
| 7 | EUT Constructional Details (EUT Photos) | 69 |

1 Introduction

1.1 Laboratory Location

| | |
|----------------|---|
| Test location: | BTF Testing Lab (Shenzhen) Co., Ltd. |
| Address: | F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| Phone number: | +86-0755-23146130 |
| Fax number: | +86-0755-23146130 |

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 518915.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in Part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the Part provided by the applicant.

2 Product Information

2.1 Application Information

| | |
|---------------|--|
| Company name: | Shenzhen DOOGEE Hengtong Technology CO.,LTD |
| Address: | B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China |

2.2 Manufacturer Information

| | |
|---------------|--|
| Company name: | Shenzhen DOOGEE Hengtong Technology CO.,LTD |
| Address: | B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China |

2.3 Factory Information

| | |
|---------------|--|
| Company name: | Shenzhen DOOGEE Hengtong Technology CO.,LTD |
| Address: | B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China |

2.4 General Description of Equipment under Test (EUT)

| | |
|---|--|
| EUT name | Tablet |
| Under test model name | Tab E3+ |
| Series model name | Tab E3+ VIP Edition, Tab E3, Tab E3 VIP Edition, Tab E3 Play, Tab E3 Play VIP Edition |
| Description of model name differentiation | There is no difference except the name of the model |
| Hardware Version | WT_G31_Y_6789_BJJ_UFS_MB_V2.1_20241218 |
| Software Version | DOOGEE-Tab E3+-EEA-Android15.0-20250225 |
| Rating: | DC 3.85V from battery or DC 9V from Fast Charger |
| Fast Charger | Manufacturer: Shenzhen Huajin Electronics Co.,LTD Model: HJ-PD18W-US Input: AC100-240V~ 50/60Hz 0.6A Output: 5.0V=3.0A 15.0W OR 9.0V=2.0A 18.0W OR 12.0V=1.5A 18.0W MAX |

2.5 Technical Information

| | | |
|-------------------------|--|--|
| Operation frequency: | GSM/GPRS/EGPRS 850: 824.2 MHz ~ 848.8 MHz GSM/GPRS/EGPRS 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA/HSDPA/HSUPA Band 2: 1852.4 MHz ~ 1907.6 MHz WCDMA/HSDPA/HSUPA Band 4: 1712.4 MHz ~ 1752.6 MHz WCDMA/HSDPA/HSUPA Band 5: 826.4 MHz ~ 846.6 MHz FDD LTE Band 2: 1850MHz ~ 1910MHz, FDD LTE Band 4: 1710MHz ~ 1755MHz FDD LTE Band 5: 824MHz ~ 849MHz, FDD LTE Band 7: 2500MHz ~ 2570MHz FDD LTE Band 19: 830MHz ~ 845MHz, FDD LTE Band 25: 1850MHz ~ 1915MHz FDD LTE Band 26a: 814MHz ~ 824MHz, FDD LTE Band 26b: 824MHz ~ 849MHz TDD LTE Band 38: 2570MHz ~ 2620MHz, TDD LTE Band 41: 2535MHz ~ 2655MHz, FDD LTE Band 66: 1710MHz ~ 1780MHz The LTE Band41 upports frequency is 2535-2655MHz, Due to actual customer needs Using software, the prototype can only operate at 2535-2655 MHZ, other frequencies have been blocked | |
| Modulation Type: | GSM/GPRS | GMSK |
| | EGPRS | 8PSK |
| | WCDMA | QPSK |
| | HSDPA/HSUPA | QPSK |
| | | 16QAM |
| | LTE | QPSK |
| | | 16QAM |
| Antenna type: | PIFA Antenna | |
| Antenna gain: | GSM 850: -2.5dBi PCS 1900: -0.8dBi WCDMA Band 2: -0.8dBi WCDMA Band 4: -1.3dBi WCDMA Band 5: -2.5dBi FDD LTE Band 2: -0.8dBi FDD LTE Band 4: -1.3dBi FDD LTE Band 5: -2.5dBi (declare by Applicant) | FDD LTE Band 7: 2.53dBi FDD LTE Band 19: -2.5dBi FDD LTE Band 25: -0.8dBi FDD LTE Band 26a: -3.45dBi FDD LTE Band 26b: -2.5dBi TDD LTE Band 38: 2.34dBi TDD LTE Band 41: 2.5dBi FDD LTE Band 66: 0.7dBi (declare by Applicant) |
| Power Class | GSM/GPRS 850: 4 GSM/GPRS 1900: 1 EGPRS 850/1900: E2 WCDMA/HSDPA/HSUPA Band 2: 3 WCDMA/HSDPA/HSUPA Band 4: 3 WCDMA/HSDPA/HSUPA Band 5: 3 FDD LTE Band 2: 3 FDD LTE Band 4: 3 FDD LTE Band 5: 3 | FDD LTE Band 7: 3 FDD LTE Band 19: 3 FDD LTE Band 25: 3 FDD LTE Band 26: 3 TDD LTE Band 38: 3 TDD LTE Band 41: 3 FDD LTE Band 66: 3 |
| Maximum conducted power | GSM850: 32.64dBm GSM1900: 30.12dBm WCDMA Band II: 22.96dBm | LTE Band 7: 22.64dBm FDD LTE Band 19: 23.21dBm FDD LTE Band 25: 23.32dBm |

| | | |
|--|---|--|
| | WCDMA Band IV: 23.04dBm WCDMA Band V: 21.89dBm LTE Band 2: 22.84dBm LTE Band 4: 23.28dBm LTE Band 5: 23.35dBm | FDD LTE Band 26: 23.99dBm TDD LTE Band 38: 24.00dBm TDD LTE Band 41: 22.69dBm FDD LTE Band 66: 23.73dBm |
|--|---|--|

3 Test Information

3.1 Test Standards

| Identity | Document Title |
|------------------------------------|---|
| FCC CFR Title 47 Part 2 | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| FCC CFR Title 47 Part 22 SubPart H | Cellular Radiotelephone Service |
| FCC CFR Title 47 Part 24 SubPart E | Broadband PCS |
| FCC CFR Title 47 Part 27 SubPart C | Miscellaneous Wireless Communications Services -Technical Standards |
| FCC CFR Title 47 Part 90 SubPart S | PRIVATE LAND MOBILE RADIO SERVICES |
| ANSI C63.26-2015 | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services |
| ANSI/TIA-603-E-2016 | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards |

3.2 Summary of Test

| Clauses | Test Items | Result |
|---|---|--------|
| FCC Part 22.913(a), FCC Part 24.232(b), FCC Part 27.50(a), FCC Part 2.1046, FCC Part 27.50(b), FCC Part 27.50(c), FCC Part 27.50(d), FCC Part 27.50(h), FCC Part 90.635 | Transmitter Radiated Power (EIRP/ERP) | Pass |
| FCC Part 2.1046, FCC Part 22.913(a), FCC Part 24.232(b), FCC Part 24.232(c), FCC Part 27.50(b), FCC Part 27.50(c), FCC Part 27.50(d), FCC Part 27.50(h), FCC Part 90.635 | RF Output Power | Pass |
| FCC Part 22.913(a), FCC Part 22.913(d), FCC Part 24.232(b), FCC Part 24.232(d), FCC Part 27.50(a), FCC Part 27.50(d)(5) | Peak-to-Average Power Ratio | Pass |
| FCC § 2.1047(d), FCC Part 22H, FCC Part 24E, FCC Part 27 | Modulation Characteristics | Pass |
| FCC Part 2.1049, Part 22.917, Part 24.238, FCC Part 22.913(a), FCC Part 24.232(b), FCC Part 27.53(a), FCC Part 90.209 | 26dB Emission Bandwidth 99% Occupied Bandwidth | Pass |
| FCC Part 22.917 (a), FCC Part 24.238 (a), FCC Part 27.53(g), FCC Part 2.1051, FCC Part 22.917, FCC Part 24.238, FCC Part 27.53(c)(f), FCC Part 27.53(g), FCC Part 27.53(h), FCC Part 27.53(m), FCC Part 90.691 | Out of Band Emission at Antenna Terminals | Pass |

| | | |
|--|--------------------------------------|------|
| FCC Part 2.1053, FCC Part 22.917 (a), FCC Part 24.238 (a), FCC Part 27.53(g), FCC Part 2.1053, FCC Part 22.917, FCC Part 24.238, FCC Part 27.53(c)(f), FCC Part 27.53(g), FCC Part 27.53(h), FCC Part 27.53(m), FCC Part 90.691 | Field Strength of Spurious Radiation | Pass |
| FCC Part 2.1055(a)(1)(b), FCC Part 22.355 FCC Part 24.235, FCC Part 27.54, FCC Part 90.213, FCC Part 2.1055(d)(1)(2) FCC Part 22.355, FCC Part 24.235 FCC Part 27.54, FCC Part 90.213 | Frequency Stability | Pass |

Remark:

1. Pass: met the requirements.
2. N/A: not applicable.

3.3 Uncertainty of Test

| Measurement | Value |
|---|----------|
| Occupied Channel Bandwidth | ±5 % |
| RF output power, conducted | ±1.5 dB |
| Power Spectral Density, conducted | ±3.0 dB |
| Unwanted Emissions, conducted | ±3.0 dB |
| Supply voltages | ±3 % |
| Time | ±5 % |
| Conducted Emission for LISN (9kHz ~ 150kHz) | ±2.97 dB |
| Conducted Emission for LISN (150kHz ~ 30MHz) | ±2.45 dB |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.80 dB |
| Radiated Emission (1GHz ~ 18GHz) | ±4.82 dB |
| The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. | |

3.4 Additions to, deviations, or exclusions from the method

None

3.5 Test Auxiliary Equipment

| Description | Manufacturer | Model | Serial No. | Length | Description |
|--------------|-------------------------------------|-------------|------------|--------|-------------|
| Fast Charger | Shenzhen Huajin Electronics Co.,LTD | HJ-PD18W-US | / | / | / |

3.6 Test Equipment List

| Radiated test method | | | | | |
|-------------------------------------|-----------------|-----------|------------|------------|------------|
| Test Equipment | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
| EMI Receiver | Rohde & Schwarz | ESCI7 | 101032 | 2024/10/25 | 2025/10/24 |
| Signal Analyzer | Rohde & Schwarz | FSQ40 | 100010 | 2024/10/25 | 2025/10/24 |
| Log periodic antenna | Schwarzbeck | VULB 9168 | 01328 | 2024/10/28 | 2025/10/27 |
| Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | 61997 | 2024/10/25 | 2025/10/24 |
| Preamplifier (30MHz ~ 1GHz) | Schwarzbeck | BBV9744 | 00246 | 2024/09/24 | 2025/09/23 |
| Horn Antenna (1GHz ~ 18GHz) | Schwarzbeck | BBHA9120D | 2597 | 2024/10/30 | 2025/10/29 |
| Horn Antenna (15GHz ~ 40GHz) | SCHWARZBECK | BBHA9170 | 1157 | 2024/10/24 | 2025/10/23 |

| | | | | | |
|--------------------------------|------------|--------------------------|----------------------|------------|------------|
| 4G DTU Ant | HAOHAIXING | RG174 | / | / | / |
| Preamplifier (1GHz ~ 40GHz) | TST | LNA10180G45 | 246 | 2024/09/24 | 2025/09/23 |
| RF Cable | / | LMR400UF- NMNM-7.0M | / | 2024/09/24 | 2025/09/23 |
| RF Cable | / | SFT2050PUR- NMNM-7.0M | / | 2024/09/24 | 2025/09/23 |
| Test Software | Frad | EZ_EMCA | Version: FA-03A2 RE+ | | |

| Conducted test method | | | | | |
|-------------------------------------|---------------|-----------|--------------|------------|------------|
| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
| Spectrum Analyzer | Keysight | N9020A | MY50410020 | 2024/10/25 | 2025/10/24 |
| ESG Vector Signal Generator | Agilent | E4438C | MY45094854 | 2024/10/25 | 2025/10/24 |
| MXG Vector Signal Generator | Agilent | N5182A | MY46240163 | 2024/10/25 | 2025/10/24 |
| Wideband Radio Communication Tester | Rohde&Schwarz | CMW500 | 61997 | 2024/10/25 | 2025/10/24 |
| Temperature Humidity Chamber | ZZCKONG | ZZ-K02A | 20210928007 | 2024/10/25 | 2025/10/24 |
| DC Power Supply | Tongmen | etm-6050c | 20211026123 | 2024/10/25 | 2025/10/24 |
| RF Control Unit | Techy | TR1029-1 | / | 2024/10/25 | 2025/10/24 |
| RF Sensor Unit | Techy | TR1029-2 | / | 2024/10/25 | 2025/10/24 |
| Test Software | TST | / | Version: 2.0 | | |

4 Test Configuration

4.1 Environment Condition

| Selected Values During Tests | | |
|------------------------------|-------------------|-------------------|
| Temperature | Relative Humidity | Ambient Pressure |
| Normal: +15°C to +35°C | | |
| Extreme: -10°C to +40°C | 20% to 75% | 86 kPa to 106 kPa |

4.2 Test mode

| | |
|--|---|
| GSM mode: | Keep the EUT communication with simulated station in GSM mode |
| GPRS mode: | Keep the EUT communication with simulated station in GPRS mode |
| EGPRS mode: | Keep the EUT communication with simulated station in EGPRS mode |
| RMC mode: | Keep the EUT communication with simulated station in RMC mode |
| HSDPA mode: | Keep the EUT communication with simulated station in HSDPA mode |
| HSUPA mode: | Keep the EUT communication with simulated station in HSUPA mode |
| QPSK mode: | Keep the EUT communication with simulated station in QPSK mode |
| 16QAM mode: | Keep the EUT communication with simulated station in 16QAM mode |
| Remark: Per-scan all kind of data rate, and report only reflects the test data of worst data rate mode. | |

4.3 Test Channel of EUT

Regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| GSM 850 | | | PCS 1900 | | |
|------------|-------------|-----------------|------------|-------------|-----------------|
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| Lowest | 128 | 824.2 | Lowest | 512 | 1850.2 |
| Middle | 190 | 836.6 | Middle | 661 | 1880.0 |
| Highest | 251 | 848.8 | Highest | 810 | 1909.8 |
| WCDMA 850 | | | WCDMA 1900 | | |
| Lowest | 4132 | 826.4 | Lowest | 9262 | 1852.4 |
| Middle | 4183 | 836.6 | Middle | 9400 | 1880.0 |
| Highest | 4233 | 846.6 | Highest | 9538 | 1907.6 |
| WCDMA 1700 | | | | | |
| Lowest | 1312 | 1712.4 | | | |
| Middle | 1413 | 1732.6 | | | |
| Highest | 1513 | 1752.6 | | | |

| LTE Band 2 | | | | | |
|----------------|-------------|-----------------|---------------|-------------|-----------------|
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 18607 | 1850.7 | Lowest | 18915 | 1851.5 |
| Middle | 18900 | 1880.0 | Middle | 18900 | 1880.0 |
| Highest | 19193 | 1909.3 | Highest | 19185 | 1908.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 18625 | 1852.5 | Lowest | 18650 | 1855.0 |
| Middle | 18900 | 1880.0 | Middle | 18900 | 1880.0 |
| Highest | 19175 | 1907.5 | Highest | 19150 | 1905.0 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 18675 | 1857.5 | Lowest | 18700 | 1860.0 |
| Middle | 18900 | 1880.0 | Middle | 18900 | 1880.0 |
| Highest | 19125 | 1902.5 | Highest | 19100 | 1900.0 |
| LTE Band 4 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 19957 | 1710.7 | Lowest | 19965 | 1711.5 |
| Middle | 20175 | 1732.5 | Middle | 20175 | 1732.5 |
| Highest | 20393 | 1754.3 | Highest | 20385 | 1753.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 19975 | 1712.5 | Lowest | 20000 | 1715.0 |
| Middle | 20175 | 1732.5 | Middle | 20175 | 1732.5 |
| Highest | 20375 | 1752.5 | Highest | 20350 | 1750.0 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 20025 | 1717.5 | Lowest | 20050 | 1720.0 |
| Middle | 20175 | 1732.5 | Middle | 20175 | 1732.5 |
| Highest | 20325 | 1747.5 | Highest | 20300 | 1745.0 |
| LTE Band 5 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 20407 | 824.7 | Lowest | 20415 | 825.5 |
| Middle | 20525 | 836.5 | Middle | 20525 | 836.5 |
| Highest | 20643 | 848.3 | Highest | 20635 | 847.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 20425 | 826.5 | Lowest | 20450 | 829.0 |
| Middle | 20525 | 836.5 | Middle | 20525 | 836.5 |
| Highest | 20625 | 846.5 | Highest | 20600 | 844.0 |

| LTE Band 7 | | | | | |
|----------------|-------------|-----------------|---------------|-------------|-----------------|
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 5 MHz | | | 10 MHz | | |
| Lowest | 20775 | 2502.5 | Lowest | 20800 | 2505.0 |
| Middle | 21100 | 2535.0 | Middle | 21100 | 2535.0 |
| Highest | 21425 | 2567.5 | Highest | 21400 | 2565.0 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 20825 | 2507.5 | Lowest | 20850 | 2510.0 |
| Middle | 21100 | 2535.0 | Middle | 21100 | 2535.0 |
| Highest | 21375 | 2562.5 | Highest | 21350 | 2560.0 |
| LTE Band 19 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 5 MHz | | | 10 MHz | | |
| Lowest | 24025 | 832.5 | Lowest | 24050 | 835 |
| Middle | 24075 | 837.5 | Middle | 24075 | 837.5 |
| Highest | 24125 | 842.5 | Highest | 24100 | 840 |
| LTE Band 25 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 26047 | 1850.70 | Lowest | 26055 | 1851.50 |
| Middle | 26365 | 1882.50 | Middle | 26365 | 1882.50 |
| Highest | 26683 | 1914.30 | Highest | 26675 | 1913.50 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 26065 | 1852.50 | Lowest | 26090 | 1855.00 |
| Middle | 26365 | 1882.50 | Middle | 26365 | 1882.50 |
| Highest | 26665 | 1912.50 | Highest | 26640 | 1910.00 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 26115 | 1857.50 | Lowest | 26140 | 1860.00 |
| Middle | 26365 | 1882.50 | Middle | 26365 | 1882.50 |
| Highest | 26615 | 1907.50 | Highest | 26590 | 1905.00 |

| LTE Band 26(814-824) | | | | | |
|----------------------|-------------|-----------------|---------------|-------------|-----------------|
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 26697 | 814.7 | Lowest | 26705 | 815.5 |
| Middle | 26740 | 819 | Middle | 26740 | 819 |
| Highest | 26783 | 823.3 | Highest | 26775 | 822.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 26715 | 816.5 | Middle | 26740 | 819 |
| Middle | 26740 | 819 | | | |
| Highest | 26765 | 821.5 | | | |
| LTE Band 26(824-849) | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 26797 | 824.7 | Lowest | 26805 | 825.5 |
| Middle | 26915 | 836.5 | Middle | 26915 | 836.5 |
| Highest | 27033 | 848.3 | Highest | 27025 | 847.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 26815 | 826.5 | Lowest | 26840 | 829 |
| Middle | 26915 | 836.5 | Middle | 26915 | 836.5 |
| Highest | 27015 | 846.5 | Highest | 26990 | 844 |
| 15 MHz | | | | | |
| Lowest | 26865 | | | | |
| Middle | 26915 | 836.5 | | | |
| Highest | 26965 | | | | |
| LTE Band 38 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 5 MHz | | | 10MHz | | |
| Lowest | 37775 | 2572.5 | Lowest | 37800 | 2575 |
| Middle | 38000 | 2595 | Middle | 38000 | 2595 |
| Highest | 38225 | 2617.5 | Highest | 38200 | 2612 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 37825 | 2577.5 | Lowest | 37850 | 2580 |
| Middle | 38000 | 2595 | Middle | 38000 | 2595 |
| Highest | 38175 | 2612.5 | Highest | 38150 | 2610 |


| LTE Band 41(2535-2655MHz) | | | | | |
|---------------------------|-------------|-----------------|---------------|-------------|-----------------|
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 5 MHz | | | 10 MHz | | |
| Lowest | 40065 | 2537.5 | Lowest | 40090 | 2540 |
| Middle | 40590 | 2590 | Middle | 40590 | 2590 |
| Highest | 41215 | 2652.5 | Highest | 41190 | 2650 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 40115 | 2542.5 | Lowest | 40140 | 2545 |
| Middle | 40590 | 2590 | Middle | 40590 | 2590 |
| Highest | 41165 | 2647.5 | Highest | 41140 | 2645 |
| LTE Band 66 | | | | | |
| Channels | Channel No. | Frequency (MHz) | Channels | Channel No. | Frequency (MHz) |
| 1.4 MHz | | | 3 MHz | | |
| Lowest | 131979 | 1710.7 | Lowest | 131987 | 1711.5 |
| Middle | 132322 | 1745.0 | Middle | 132322 | 1745.0 |
| Highest | 132665 | 1779.3 | Highest | 132657 | 1778.5 |
| 5 MHz | | | 10 MHz | | |
| Lowest | 131997 | 1712.5 | Lowest | 132022 | 1715.0 |
| Middle | 132322 | 1745.0 | Middle | 132322 | 1745.0 |
| Highest | 132647 | 1777.5 | Highest | 132622 | 1775.0 |
| 15 MHz | | | 20 MHz | | |
| Lowest | 132047 | 1717.5 | Lowest | 132072 | 1720.0 |
| Middle | 132322 | 1745.0 | Middle | 132322 | 1745.0 |
| Highest | 132597 | 1772.5 | Highest | 132572 | 1770.0 |

4.4 Test procedure



| Radiated test method |
|--|
| For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. |
| For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. |
| Conducted test method |
| 1. The GSM/WCDMA/LTE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software. |

4.5 Test Setup Block

1) Conducted test method:

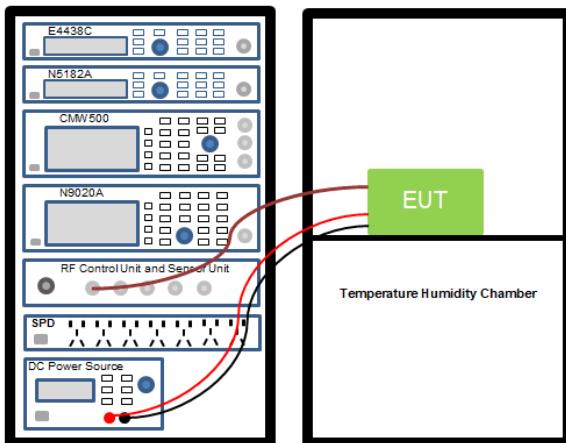

2) Radiated test method:

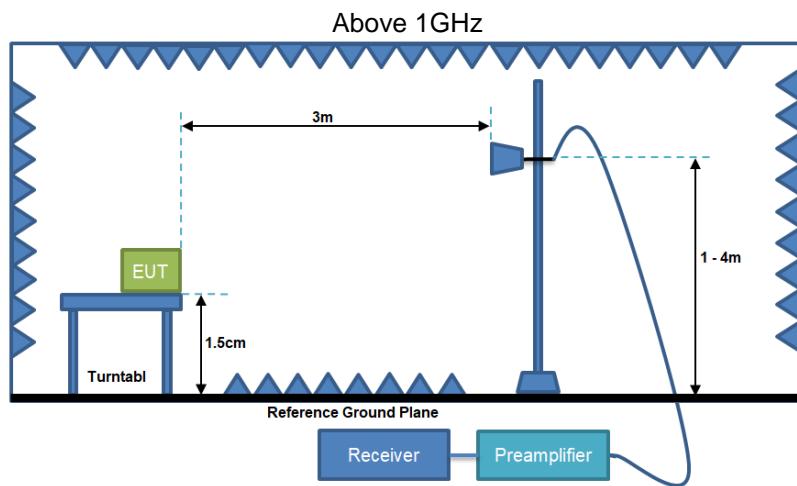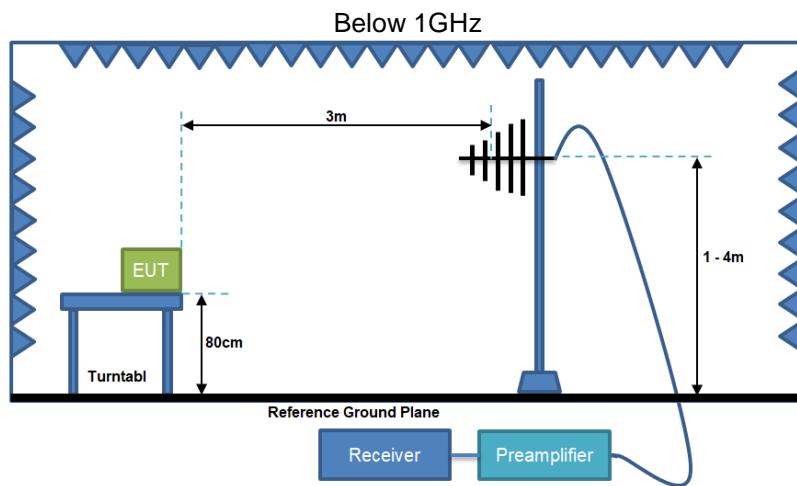

5 Technical requirements specification

5.1 Transmitter Radiated Power (EIRP/ERP)

5.1.1 Limit

GSM850, WCDMA Band V: $\leq 7W$

PCS1900, WCDMA Band II: $\leq 2W$

WCDMA Band IV: $\leq 1W_{sss}$

ERP $\leq 7W(38.45\text{dBm})$ (LTE Band 5, 26(824-849MHz))

EIRP $\leq 2W(33.00\text{dBm})$ (LTE Band 2,25)

EIRP $\leq 1W(30.00\text{dBm})$ (LTE Band 4,66)

EIRP $\leq 2W(33.00\text{dBm})$ (LTE Band 7,38,41)

ERP $\leq 100W(50.00\text{dBm})$ (LTE Band 26(814-824MHz))

5.1.2 Test Setup

The section 4.4 test setup 4 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.1.3 Test Procedure

Description of the Conducted Output Power Measurement

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

$$\text{Conducted Output Power Value (dBm)} = \text{Measured Value (dBm)} + \text{Path Loss (dB)}$$

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;

Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;

Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

For example:

In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is:

$$\text{Conducted Output Power Value (dBm)} = 24.7 \text{ dBm} + 8.5 \text{ dB} = 33.2 \text{ dBm}$$

Description of the Transmitter Radiated Power Measurement

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW; GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP); dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when PMeas value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21 \text{ dBm} + 8 \text{ dB} = 29 \text{ dBm}$$

5.1.4 Test Result

Please refer to the appendix report

5.2 Peak to Average Ratio

5.2.1 Limit

FCC Part 22.913(a), FCC Part 22.913(d), FCC Part 24.232(b), FCC Part 24.232(d), FCC Part 27.50(a), FCC Part 27.50(d)(5)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e)), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5); in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

5.2.2 Test Setup

The section 4.5 test setup 5 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.2.3 Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:

1)for continuous transmissions, set to 1 ms,
2)for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

- e) Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

5.2.4 Test Result

Please refer to the appendix report

5.3 Occupied Bandwidth

5.3.1 Limit

FCC Part 2.1049, Part 22.917, Part 24.238, FCC Part 22.913(a), FCC Part 24.232(b), FCC Part 27.53(a), FCC Part 90.209

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule Parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

5.3.2 Test Setup

The section 4.5 test setup 5 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.3.3 Test Procedure

The following procedure shall be used for measuring power bandwidth.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the anticipated OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) For -26 dB OBW, the dynamic range of the spectrum analyzer at the selected RBW shall be at least 10dB below the target “-X dB down” requirement, e.g. -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be 36dB below the reference value.
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) For 99% OBW, use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) For -26 dB OBW, determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). Determine the “-X dB down amplitude” as equal to (reference value -X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

i) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

j) Change variable modulations, coding, or channel bandwidth settings, then repeat above test procedures.

5.3.4 Test Result

Please refer to the appendix report

5.4 Frequency Stability

5.4.1 Limit

FCC Part 2.1055(a)(1)(b), FCC Part 22.355, FCC Part 24.235, FCC Part 27.54, FCC Part 90.213, FCC Part 2.1055(d)(1)(2), FCC Part 22.355, FCC Part 24.235, sFCC Part 27.54, FCC Part 90.213

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) The temperature is varied from -30°C to +50°C.
- (2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this Part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency range (MHz) | Base, fixed (ppm) | Mobile > 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50 | 20.0 | 20.0 | 50.0 |
| 50 to 450 | 5.0 | 5.0 | 50.0 |
| 450 to 512 | 2.5 | 5.0 | 5.0 |
| 821 to 896 | 1.5 | 2.5 | 2.5 |
| 928 to 929 | 5.0 | n/a | n/a |
| 929 to 960 | 1.5 | n/a | n/a |
| 2110 to 2220 | 10.0 | n/a | n/a |

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

FCC § 90.213

The frequency stability shall not depart from the reference frequency in excess of ±2.5ppm for mobile stations.

5.4.2 Test Setup

The section 4.5 test setup 6 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.4.3 Test Procedure

1. The EUT is placed in a temperature chamber.
2. The temperature is set to 25°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured.
3. The temperature is increased by not more than 10 degrees, allowed to stabilize and soak, and then repeat the frequency error measurement.
4. Repeat procedure 3 until +50°C and -30°C is reached.
5. Change supply voltage, and repeat measurement until extreme voltage is reached.

5.4.4 Test Result

Please refer to the appendix report

5.5 Spurious Emission at Antenna Terminals

5.5.1 Limit

FCC Part 22.917 (a), FCC Part 24.238 (a), FCC Part 27.53(g), FCC Part 2.1051, FCC Part 22.917, FCC Part 24.238, FCC Part 27.53(c)(f), FCC Part 27.53(g), FCC Part 27.53(h), FCC Part 27.53(m), FCC Part 90.691

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

- (1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.
- (2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.
- (3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and

-80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands,

the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power

(P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(m) (4) ,

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or

EBS licensees.

FCC § 90.691

- (a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
 - (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log10}(f/6.1)$ decibels or $50 + 10 \text{ Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
 - (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.
- (b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

- (e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
 - (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \text{ log}(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
 - (2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \text{ log}(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
 - (3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \text{ log}(P)$ dB.
 - (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

5.5.2 Test Setup

The section 4.5 test setup 5 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.5.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \text{ log}(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency blocks a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one

above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.

The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.

Spurious emissions are tested with 0.001MHz RBW for frequency less than 150kHz, 0.01MHz RBW for frequency less than 30MHz, 0.1MHz RBW for frequency less than 1GHz, and 1MHz RBW for frequency above 1GHz. And sweep point number are at least 401, referring to following formula.

Sweep point number = Span/RBW VBW=3*RBW

Detector Mode=mean or average power

Record the frequencies and levels of spurious emissions.

5.5.4 Test Result

Please refer to the appendix report

5.6 Band Edge Emission

5.6.1 Limit

FCC Part 22.917 (a), FCC Part 24.238 (a), FCC Part 27.53(g), FCC Part 2.1051, FCC Part 22.917, FCC Part 24.238, FCC Part 27.53(c)(f), FCC Part 27.53(g), FCC Part 27.53(h), FCC Part 27.53(m), FCC Part 90.691

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

- (1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than 55 + $10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.
- (2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.
- (3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25Hz band segment, for base and fixed stations;

- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 90.691

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
 - (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 dB.

Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

5.6.2 Test Setup

The section 4.5 test setup 5 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.6.3 Test Procedure

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.
2. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. The center of the spectrum analyzer was set to block edge frequency.
5. Band edge are tested with $1\% * cBW$ (RBW), and sweep point number referred to following formula.
Sweep point number = $2 * \text{Span}/\text{RBW}$ $\text{VBW}=3\text{RBW}$
6. Record the frequencies and levels of spurious emissions.

For mobile and portable stations, on all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$10 \log(10 \text{ kHz} / 6.25 \text{ kHz}) = 2.04 \text{ dB}$
Limit Line = -35 dBm + 2.04 dB = -32.96dBm

5.6.4 Test Result

Please refer to the appendix report

5.7 Field Strength of Spurious Radiation

5.7.1 Limit

FCC Part 2.1053, FCC Part 22.917 (a), FCC Part 24.238 (a), FCC Part 27.53(g), FCC Part 2.1053, FCC Part 22.917, FCC Part 24.238, FCC Part 27.53(c)(f), FCC Part 27.53(g), FCC Part 27.53(h), FCC Part 27.53(m), FCC Part 90.691 FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

- (1) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337MHz.
- (2) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log (P)$ dB below 2288MHz.
- (3) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log (P)$ dB above 2365MHz.

FCC § 27.53(c),

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of

measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and

-80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands,

the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power

(P) in watts by at least $43 + 10 \log_{10} (P)$ dB. FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation,

where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

5.7.2 Test Setup

The section 4.5 test setup 4 description is used for conducted test, and the test setup description is used for radiated test. The photo of test setup please refer to Appendix I Test Setup Photos

5.7.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is: ERP/EIRP (dBm) = SA Read Value (dBm) + Correction Factor (dB)

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.7.4 Test Result

| | | | |
|--------------|-----------------------|---------------|---------|
| Temperature | 22.5°C | Humidity | 56% |
| Test voltage | DC 3.85V from battery | Test Engineer | Sean He |

| Test mode: | GSM850 | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1638.35 | Vertical | -31.65 | -13.00 | Pass |
| 2422.17 | V | -30.05 | | |
| 3251.76 | V | -32.76 | | |
| 4287.82 | V | -44.33 | | |
| 5159.71 | V | --- | | |
| 4750.09 | Horizontal | -31.65 | | |
| 2667.26 | H | -38.52 | | |
| 3856.47 | H | -36.38 | | |
| 4425.53 | H | -36.07 | | |
| 5147.74 | H | --- | | |
| Test mode: | GSM850 | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1703.38 | Vertical | -34.60 | -13.00 | Pass |
| 2561.32 | V | -32.99 | | |
| 3420.24 | V | -32.63 | | |
| 4369.94 | V | -44.18 | | |
| 5260.24 | V | --- | | |
| 1751.85 | Horizontal | -32.44 | | |
| 2876.25 | H | -39.12 | | |
| 3440.44 | H | -37.85 | | |
| 4394.90 | H | -36.67 | | |
| 5147.78 | H | --- | | |
| Test mode: | GSM850 | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1614.82 | Vertical | -32.83 | -13.00 | Pass |
| 2445.88 | V | -33.18 | | |
| 3224.45 | V | -33.53 | | |
| 4143.89 | V | -44.17 | | |
| 5073.52 | V | --- | | |
| 1811.86 | Horizontal | -31.43 | | |
| 2504.32 | H | -40.10 | | |
| 3885.42 | H | -35.96 | | |
| 4312.34 | H | -33.75 | | |
| 5147.81 | H | --- | | |

| Test mode: | PCS1900 | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3731.41 | Vertical | -31.57 | -13.00 | Pass |
| 5599.25 | V | -31.55 | | |
| 7429.91 | V | -30.93 | | |
| 9284.75 | V | -42.80 | | |
| 11256.81 | V | --- | | |
| 3732.47 | Horizontal | -32.93 | | |
| 5524.88 | H | -31.94 | | |
| 7406.31 | H | -37.49 | | |
| 9245.35 | H | -42.18 | | |
| 11233.99 | H | --- | | |
| Test mode: | PCS1900 | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3731.30 | Vertical | -30.94 | -13.00 | Pass |
| 5641.62 | V | -31.65 | | |
| 7507.68 | V | -33.11 | | |
| 9485.14 | V | -44.28 | | |
| 11408.52 | V | --- | | |
| 3716.61 | Horizontal | -32.80 | | |
| 5673.48 | H | -32.10 | | |
| 7531.74 | H | -39.66 | | |
| 9426.41 | H | -39.25 | | |
| 11329.99 | H | --- | | |
| Test mode: | PCS1900 | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3832.84 | Vertical | -31.67 | -13.00 | Pass |
| 5744.13 | V | -32.17 | | |
| 7649.38 | V | -33.84 | | |
| 9520.60 | V | -44.28 | | |
| 11606.72 | V | --- | | |
| 3833.90 | Horizontal | -32.74 | | |
| 5746.78 | H | -32.04 | | |
| 7625.18 | H | -38.59 | | |
| 9578.19 | H | -41.65 | | |
| 11531.69 | H | --- | | |

| Test mode: | WCDMA Band V | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1362.61 | Vertical | -31.37 | -13.00 | Pass |
| 2696.45 | V | -34.50 | | |
| 3350.95 | V | -31.70 | | |
| 4220.14 | V | -42.57 | | |
| 5064.94 | V | --- | | |
| 1407.69 | Horizontal | -29.51 | | |
| 2504.96 | H | -38.65 | | |
| 3643.31 | H | -33.12 | | |
| 4328.79 | H | -30.55 | | |
| 5147.37 | H | --- | | |
| Test mode: | WCDMA Band V | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1537.20 | Vertical | -30.15 | -13.00 | Pass |
| 2649.05 | V | -32.80 | | |
| 3450.64 | V | -32.75 | | |
| 4321.58 | V | -43.94 | | |
| 5256.27 | V | --- | | |
| 4845.32 | Horizontal | -29.32 | | |
| 2555.94 | H | -35.23 | | |
| 3956.07 | H | -35.06 | | |
| 4336.71 | H | -34.87 | | |
| 5364.97 | H | --- | | |
| Test mode: | WCDMA Band V | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1526.46 | Vertical | -35.69 | -13.00 | Pass |
| 2318.55 | V | -32.04 | | |
| 3586.30 | V | -33.08 | | |
| 4421.29 | V | -43.41 | | |
| 5404.70 | V | --- | | |
| 1745.04 | Horizontal | -30.76 | | |
| 2867.78 | H | -38.14 | | |
| 3566.79 | H | -36.14 | | |
| 4412.26 | H | -35.56 | | |
| 5147.09 | H | --- | | |

| Test mode: | WCDMA Band II | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3429.10 | Vertical | -31.91 | -13.00 | Pass |
| 5145.70 | V | -28.95 | | |
| 6872.14 | V | -33.28 | | |
| 8541.55 | V | -44.89 | | |
| 10330.24 | V | --- | | |
| 3429.25 | Horizontal | -31.03 | | |
| 5131.50 | H | -39.66 | | |
| 6869.93 | H | -37.21 | | |
| 8604.94 | H | -34.84 | | |
| 10244.54 | H | --- | | |
| Test mode: | WCDMA Band II | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3443.33 | Vertical | -30.91 | -13.00 | Pass |
| 5141.26 | V | -31.00 | | |
| 6980.12 | V | -34.67 | | |
| 8667.13 | V | -43.93 | | |
| 10476.04 | V | --- | | |
| 3472.41 | Horizontal | -32.69 | | |
| 5118.90 | H | -39.18 | | |
| 6965.30 | H | -37.15 | | |
| 8716.96 | H | -35.57 | | |
| 10319.35 | H | --- | | |
| Test mode: | WCDMA Band II | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3515.41 | Vertical | -31.03 | -13.00 | Pass |
| 5223.63 | V | -29.04 | | |
| 7032.26 | V | -31.82 | | |
| 8770.69 | V | -43.65 | | |
| 10666.55 | V | --- | | |
| 3545.38 | Horizontal | -32.47 | | |
| 5251.76 | H | -38.80 | | |
| 7060.07 | H | -36.93 | | |
| 8823.33 | H | -37.25 | | |
| 10547.04 | H | --- | | |

| Test mode: | WCDMA Band IV | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3732.06 | Vertical | -30.92 | -13.00 | Pass |
| 5599.90 | V | -30.90 | | |
| 7430.56 | V | -30.28 | | |
| 9285.40 | V | -42.15 | | |
| 11257.46 | V | --- | | |
| 3733.12 | Horizontal | -32.28 | | |
| 5525.53 | H | -31.29 | | |
| 7406.96 | H | -36.84 | | |
| 9246.00 | H | -41.53 | | |
| 11234.64 | H | --- | | |
| Test mode: | WCDMA Band IV | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3731.46 | Vertical | -30.78 | -13.00 | Pass |
| 5641.78 | V | -31.49 | | |
| 7507.84 | V | -32.95 | | |
| 9485.30 | V | -44.12 | | |
| 11408.68 | V | --- | | |
| 3716.77 | Horizontal | -32.64 | | |
| 5673.64 | H | -31.94 | | |
| 7531.90 | H | -39.50 | | |
| 9426.57 | H | -39.09 | | |
| 11330.15 | H | --- | | |
| Test mode: | WCDMA Band IV | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3833.51 | Vertical | -31.00 | -13.00 | Pass |
| 5744.80 | V | -31.50 | | |
| 7650.05 | V | -33.17 | | |
| 9521.27 | V | -43.61 | | |
| 11607.39 | V | --- | | |
| 3834.57 | Horizontal | -32.07 | | |
| 5747.45 | H | -31.37 | | |
| 7625.85 | H | -37.92 | | |
| 9578.86 | H | -40.98 | | |
| 11532.36 | H | --- | | |

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

QPSK Mode:

| Test mode: | LTE Band 2(1.4MHz) | | Test channel: | Lowest |
|-----------------|--------------------|-------------------|---------------|---------|
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| Polarization | | Level (dBm) | | |
| 3731.97 | Vertical | -31.01 | -13.00 | Pass |
| 5599.81 | V | -30.99 | | |
| 7430.47 | V | -30.37 | | |
| 9285.31 | V | -42.24 | | |
| 11257.37 | V | --- | | |
| 3733.03 | Horizontal | -32.37 | -13.00 | Pass |
| 5525.44 | H | -31.38 | | |
| 7406.87 | H | -36.93 | | |
| 9245.91 | H | -41.62 | | |
| 11234.55 | H | --- | | |
| Test mode: | LTE Band 2(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| Polarization | | Level (dBm) | | |
| 3731.96 | Vertical | -30.28 | -13.00 | Pass |
| 5642.28 | V | -30.99 | | |
| 7508.34 | V | -32.45 | | |
| 9485.80 | V | -43.62 | | |
| 11409.18 | V | --- | | |
| 3717.27 | Horizontal | -32.14 | -13.00 | Pass |
| 5674.14 | H | -31.44 | | |
| 7532.40 | H | -39.00 | | |
| 9427.07 | H | -38.59 | | |
| 11330.65 | H | --- | | |
| Test mode: | LTE Band 2(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| Polarization | | Level (dBm) | | |
| 3833.50 | Vertical | -31.01 | -13.00 | Pass |
| 5744.79 | V | -31.51 | | |
| 7650.04 | V | -33.18 | | |
| 9521.26 | V | -43.62 | | |
| 11607.38 | V | --- | | |
| 3834.56 | Horizontal | -32.08 | -13.00 | Pass |
| 5747.44 | H | -31.38 | | |
| 7625.84 | H | -37.93 | | |
| 9578.85 | H | -40.99 | | |
| 11532.35 | H | --- | | |

| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Lowest |
|-----------------|--------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3428.54 | Vertical | -32.47 | -13.00 | Pass |
| 5146.18 | V | -28.47 | | |
| 6871.80 | V | -33.62 | | |
| 8541.24 | V | -45.20 | | |
| 10329.71 | V | --- | | |
| 3428.76 | Horizontal | -31.52 | | Pass |
| 5131.59 | H | -39.57 | | |
| 6870.00 | H | -37.14 | | |
| 8605.25 | H | -34.53 | | |
| 10244.75 | H | --- | | |
| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3442.77 | Vertical | -31.47 | -13.00 | Pass |
| 5141.74 | V | -30.52 | | |
| 6979.78 | V | -35.01 | | |
| 8666.82 | V | -44.24 | | |
| 10475.51 | V | --- | | |
| 3471.85 | Horizontal | -32.62 | | Pass |
| 5119.38 | H | -38.97 | | |
| 6964.96 | H | -37.49 | | |
| 8716.47 | H | -35.88 | | |
| 10319.56 | H | --- | | |
| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3515.62 | Vertical | -30.96 | -13.00 | Pass |
| 5223.72 | V | -28.73 | | |
| 7031.77 | V | -31.73 | | |
| 8770.76 | V | -44.21 | | |
| 10666.76 | V | --- | | |
| 3545.47 | Horizontal | -32.26 | | Pass |
| 5252.07 | H | -38.73 | | |
| 7060.38 | H | -36.72 | | |
| 8822.77 | H | -37.16 | | |
| 10547.25 | H | --- | | |

| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Lowest |
|-----------------|--------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1614.67 | Vertical | -32.98 | -13.00 | Pass |
| 2445.73 | V | -33.33 | | |
| 3224.30 | V | -33.68 | | |
| 4143.74 | V | -44.32 | | |
| 5073.37 | V | --- | | |
| 1811.71 | Horizontal | -31.58 | | |
| 2504.17 | H | -40.25 | | |
| 3885.27 | H | -36.11 | | |
| 4312.19 | H | -33.90 | | |
| 5147.66 | H | --- | | |
| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1638.48 | Vertical | -31.52 | -13.00 | Pass |
| 2422.30 | V | -29.92 | | |
| 3251.89 | V | -32.63 | | |
| 4287.95 | V | -44.20 | | |
| 5159.84 | V | --- | | |
| 4750.22 | Horizontal | -31.52 | | |
| 2667.39 | H | -38.39 | | |
| 3856.60 | H | -36.25 | | |
| 4425.66 | H | -35.94 | | |
| 5147.87 | H | --- | | |
| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1703.95 | Vertical | -34.03 | -13.00 | Pass |
| 2561.89 | V | -32.42 | | |
| 3420.81 | V | -32.06 | | |
| 4370.51 | V | -43.61 | | |
| 5260.81 | V | --- | | |
| 1752.42 | Horizontal | -31.87 | | |
| 2876.82 | H | -38.55 | | |
| 3441.01 | H | -37.28 | | |
| 4395.47 | H | -36.10 | | |
| 5148.35 | H | --- | | |

| Test mode: | LTE Band 7(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5229.22 | Vertical | -31.38 | -25.00 | Pass |
| 4861.47 | V | -29.59 | | |
| 10095.02 | V | -32.78 | | |
| 13594.35 | V | -44.69 | | |
| 15233.88 | V | --- | | |
| 5138.73 | Horizontal | -31.43 | | |
| 7945.59 | H | -38.86 | | |
| 10155.49 | H | -36.02 | | |
| 12812.64 | H | -36.38 | | |
| 15137.89 | H | --- | | |
| Test mode: | LTE Band 7(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5157.66 | Vertical | -30.59 | -25.00 | Pass |
| 7640.75 | V | -31.82 | | |
| 10224.75 | V | -32.11 | | |
| 13285.21 | V | -44.97 | | |
| 15636.96 | V | --- | | |
| 5130.79 | Horizontal | -34.14 | | |
| 7738.64 | H | -39.17 | | |
| 10278.52 | H | -35.91 | | |
| 13877.91 | H | -33.90 | | |
| 15363.12 | H | --- | | |
| Test mode: | LTE Band 7(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5240.29 | Vertical | -33.62 | -25.00 | Pass |
| 7884.27 | V | -35.11 | | |
| 10348.89 | V | -31.62 | | |
| 12924.22 | V | -45.10 | | |
| 15441.80 | V | --- | | |
| 5226.70 | Horizontal | -32.32 | | |
| 7739.03 | H | -38.91 | | |
| 10357.99 | H | -36.80 | | |
| 12778.57 | H | -36.64 | | |
| 15363.66 | H | --- | | |

| Test mode: | LTE Band 19(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1363.00 | Vertical | -30.98 | -13.00 | Pass |
| 2696.84 | V | -34.11 | | |
| 3351.34 | V | -31.31 | | |
| 4220.53 | V | -42.18 | | |
| 5065.33 | V | --- | | |
| 1408.08 | Horizontal | -29.12 | | |
| 2505.35 | H | -38.26 | | |
| 3643.70 | H | -32.73 | | |
| 4329.18 | H | -30.16 | | |
| 5147.76 | H | --- | | |
| Test mode: | LTE Band 19(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1537.49 | Vertical | -29.86 | -13.00 | Pass |
| 2649.34 | V | -32.51 | | |
| 3450.93 | V | -32.46 | | |
| 4321.87 | V | -43.65 | | |
| 5256.56 | V | --- | | |
| 4845.61 | Horizontal | -29.03 | | |
| 2556.23 | H | -34.94 | | |
| 3956.36 | H | -34.77 | | |
| 4337.00 | H | -34.58 | | |
| 5365.26 | H | --- | | |
| Test mode: | LTE Band 19(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1526.78 | Vertical | -35.37 | -13.00 | Pass |
| 2318.87 | V | -31.72 | | |
| 3586.62 | V | -32.76 | | |
| 4421.61 | V | -43.09 | | |
| 5405.02 | V | --- | | |
| 1745.36 | Horizontal | -30.44 | | |
| 2868.10 | H | -37.82 | | |
| 3567.11 | H | -35.82 | | |
| 4412.58 | H | -35.24 | | |
| 5147.41 | H | --- | | |

| Test mode: | LTE Band 25(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5135.31 | Vertical | -32.31 | -13.00 | Pass |
| 7638.90 | V | -30.38 | | |
| 10125.73 | V | -34.01 | | |
| 12263.42 | V | -40.37 | | |
| 15331.40 | V | --- | | |
| 5049.92 | Horizontal | -33.20 | | |
| 7541.84 | H | -35.12 | | |
| 10560.18 | H | -30.54 | | |
| 12622.74 | H | -32.58 | | |
| 15242.18 | H | --- | | |
| Test mode: | LTE Band 25(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5252.12 | Vertical | -31.23 | -13.00 | Pass |
| 7642.97 | V | -28.95 | | |
| 10226.49 | V | -30.56 | | |
| 12543.01 | V | -41.96 | | |
| 15514.25 | V | --- | | |
| 5220.53 | Horizontal | -28.29 | | |
| 7521.46 | H | -31.80 | | |
| 10266.99 | H | -35.18 | | |
| 13592.48 | H | -35.37 | | |
| 15319.08 | H | --- | | |
| Test mode: | LTE Band 25(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5212.14 | Vertical | -29.61 | -13.00 | Pass |
| 7864.09 | V | -31.19 | | |
| 10013.25 | V | -29.30 | | |
| 12237.41 | V | -43.45 | | |
| 15505.51 | V | --- | | |
| 5308.09 | Horizontal | -33.24 | | |
| 7825.75 | H | -37.73 | | |
| 10405.11 | H | -35.02 | | |
| 12267.57 | H | -33.19 | | |
| 15327.64 | H | --- | | |

| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Lowest |
|-----------------------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3430.60 | Vertical | -31.40 | | |
| 7819.15 | V | -31.51 | | |
| 10131.50 | V | -29.70 | | |
| 12316.83 | V | -43.99 | | |
| 16343.21 | V | --- | | |
| 5193.55 | Horizontal | -27.59 | | |
| 7621.54 | H | -38.80 | | |
| 10263.70 | H | -36.60 | | |
| 12593.02 | H | -33.80 | | |
| 15219.37 | H | --- | | |
| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5131.36 | Vertical | -29.45 | | |
| 7643.71 | V | -28.77 | | |
| 10247.88 | V | -31.49 | | |
| 13279.34 | V | -41.96 | | |
| 15649.97 | V | --- | | |
| 5236.91 | Horizontal | -28.78 | | |
| 7700.41 | H | -33.01 | | |
| 10285.09 | H | -35.62 | | |
| 12661.58 | H | -35.08 | | |
| 15268.37 | H | --- | | |
| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5228.15 | Vertical | -33.48 | | |
| 7827.30 | V | -29.72 | | |
| 10349.41 | V | -33.77 | | |
| 12869.31 | V | -42.23 | | |
| 15444.31 | V | --- | | |
| 5143.24 | Horizontal | -31.83 | | |
| 7824.55 | H | -37.73 | | |
| 10344.06 | H | -34.69 | | |
| 12997.56 | H | -35.35 | | |
| 15270.37 | H | --- | | |

| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Lowest |
|-----------------------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3915.30 | Vertical | -32.48 | -13.00 | Pass |
| 5703.34 | V | -29.09 | | |
| 10251.70 | V | -30.70 | | |
| 12295.16 | V | -44.26 | | |
| 13526.47 | V | --- | | |
| 3845.64 | Horizontal | -34.37 | -13.00 | Pass |
| 7267.97 | H | -36.77 | | |
| 10306.93 | H | -36.17 | | |
| 12122.49 | H | -36.56 | | |
| 13343.16 | H | --- | | |
| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3692.72 | Vertical | -31.41 | -13.00 | Pass |
| 7911.04 | V | -28.19 | | |
| 10452.25 | V | -29.80 | | |
| 12034.25 | V | -42.94 | | |
| 15888.88 | V | --- | | |
| 3846.26 | Horizontal | -30.65 | -13.00 | Pass |
| 7585.56 | H | -38.06 | | |
| 10488.07 | H | -34.36 | | |
| 12534.70 | H | -34.80 | | |
| 15337.08 | H | --- | | |
| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3866.09 | Vertical | -29.20 | -13.00 | Pass |
| 7831.21 | V | -25.87 | | |
| 10451.86 | V | -32.69 | | |
| 12341.45 | V | -44.10 | | |
| 15617.83 | V | --- | | |
| 3904.20 | Horizontal | -29.47 | -13.00 | Pass |
| 7838.87 | H | -35.84 | | |
| 10458.02 | H | -36.01 | | |
| 12384.25 | H | -36.51 | | |
| 15287.59 | H | --- | | |

| Test mode | LTE Band 38(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2629.01 | Vertical | -31.46 | -25.00 | Pass |
| 5256.21 | V | -31.69 | | |
| 10564.69 | V | -31.05 | | |
| 12217.27 | V | -43.96 | | |
| 13697.51 | V | --- | | |
| 2642.84 | Horizontal | -33.67 | -25.00 | Pass |
| 5233.06 | H | -38.55 | | |
| 10852.64 | H | -37.59 | | |
| 12304.44 | H | -37.39 | | |
| 13264.13 | H | --- | | |
| Test mode | LTE Band 38(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2759.24 | Vertical | -28.84 | -25.00 | Pass |
| 5484.84 | V | -32.93 | | |
| 10639.86 | V | -31.12 | | |
| 12867.30 | V | -45.52 | | |
| 15710.07 | V | --- | | |
| 2688.26 | Horizontal | -32.98 | -25.00 | Pass |
| 5437.01 | H | -36.92 | | |
| 10841.10 | H | -36.63 | | |
| 12310.06 | H | -35.95 | | |
| 15331.20 | H | --- | | |
| Test mode | LTE Band 38(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2626.57 | Vertical | -30.79 | -25.00 | Pass |
| 6894.37 | V | -33.04 | | |
| 10439.42 | V | -31.08 | | |
| 12726.69 | V | -43.86 | | |
| 15637.96 | V | --- | | |
| 2689.38 | Horizontal | -28.67 | -25.00 | Pass |
| 5192.20 | H | -37.35 | | |
| 10761.51 | H | -36.31 | | |
| 13307.47 | H | -36.04 | | |
| 16260.34 | H | --- | | |

| Test mode | LTE Band 41(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3675.92 | Vertical | -28.82 | -25.00 | Pass |
| 8634.11 | V | -32.57 | | |
| 10232.49 | V | -34.19 | | |
| 12662.25 | V | -44.11 | | |
| 13375.11 | V | --- | | |
| 3991.43 | Horizontal | -31.57 | | |
| 9810.99 | H | -39.05 | | |
| 10273.48 | H | -37.39 | | |
| 12317.64 | H | -34.70 | | |
| 13164.31 | H | --- | | |
| Test mode | LTE Band 41(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3577.55 | Vertical | -31.59 | -25.00 | Pass |
| 5976.51 | V | -32.34 | | |
| 8944.81 | V | -32.63 | | |
| 10238.85 | V | -43.89 | | |
| 13802.67 | V | --- | | |
| 5870.59 | Horizontal | -29.41 | | |
| 7236.60 | H | -40.82 | | |
| 10342.49 | H | -34.33 | | |
| 12305.45 | H | -26.40 | | |
| 13262.31 | H | --- | | |
| Test mode | LTE Band 41(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3116.85 | Vertical | -33.10 | -25.00 | Pass |
| 5637.10 | V | -32.86 | | |
| 8943.99 | V | -33.60 | | |
| 10362.64 | V | -43.70 | | |
| 12876.76 | V | --- | | |
| 5132.42 | Horizontal | -32.78 | | |
| 8675.81 | H | -38.89 | | |
| 10303.11 | H | -35.61 | | |
| 12711.09 | H | -36.11 | | |
| 13592.56 | H | --- | | |

| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Lowest |
|-----------------|---------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3316.83 | Vertical | -31.60 | -13.00 | Pass |
| 5688.85 | V | -32.47 | | |
| 7306.06 | V | -31.84 | | |
| 8300.51 | V | -44.27 | | |
| 10442.28 | V | --- | | |
| 3335.00 | Horizontal | -32.66 | | |
| 5231.50 | H | -38.59 | | |
| 6952.22 | H | -37.09 | | |
| 8916.42 | H | -37.32 | | |
| 10269.46 | H | --- | | |
| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2887.23 | Vertical | -35.84 | -13.00 | Pass |
| 5371.30 | V | -34.31 | | |
| 7517.27 | V | -34.73 | | |
| 9867.32 | V | -45.38 | | |
| 10368.89 | V | --- | | |
| 3021.79 | Horizontal | -32.66 | | |
| 5235.66 | H | -37.84 | | |
| 7652.10 | H | -36.54 | | |
| 8886.81 | H | -36.06 | | |
| 10401.20 | H | --- | | |
| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3749.75 | Vertical | -31.54 | -13.00 | Pass |
| 5314.89 | V | -27.30 | | |
| 7234.94 | V | -33.14 | | |
| 8632.22 | V | -46.37 | | |
| 10574.89 | V | --- | | |
| 3336.37 | Horizontal | -33.32 | | |
| 5293.01 | H | -41.27 | | |
| 7329.61 | H | -37.35 | | |
| 8880.16 | H | -37.02 | | |
| 10128.76 | H | --- | | |

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst case is reported.
- 2 Remark"---" means that the emission level is too low (20dB lower than the limit) to be measured
- 3 The emission levels of below 1 GHz are very lower (20dB lower than the limit) than the limit and not show in test report.

The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst

16 QAM Mode:

| Test mode: | LTE Band 2 (1.4MHz) | | Test channel: | Lowest |
|-----------------|---------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3731.39 | Vertical | -31.59 | -13.00 | Pass |
| 5599.23 | V | -31.57 | | |
| 7429.89 | V | -30.95 | | |
| 9284.73 | V | -42.82 | | |
| 11256.79 | V | --- | | |
| 3732.45 | Horizontal | -32.95 | | |
| 5524.86 | H | -31.96 | | |
| 7406.29 | H | -37.51 | | |
| 9245.33 | H | -42.20 | | |
| 11233.97 | H | --- | | |
| Test mode: | LTE Band 2 (1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3731.38 | Vertical | -30.86 | -13.00 | Pass |
| 5641.70 | V | -31.57 | | |
| 7507.76 | V | -33.03 | | |
| 9485.22 | V | -44.20 | | |
| 11408.60 | V | --- | | |
| 3716.69 | Horizontal | -32.72 | | |
| 5673.56 | H | -32.02 | | |
| 7531.82 | H | -39.58 | | |
| 9426.49 | H | -39.17 | | |
| 11330.07 | H | --- | | |
| Test mode: | LTE Band 2 (1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3832.92 | Vertical | -31.59 | -13.00 | Pass |
| 5744.21 | V | -32.09 | | |
| 7649.46 | V | -33.76 | | |
| 9520.68 | V | -44.20 | | |
| 11606.80 | V | --- | | |
| 3833.98 | Horizontal | -32.66 | | |
| 5746.86 | H | -31.96 | | |
| 7625.26 | H | -38.51 | | |
| 9578.27 | H | -41.57 | | |
| 11531.77 | H | --- | | |

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst case is reported.
- 2 "Remark"---" means that the emission level is too low (20dB lower than the limit) to be measured
- 3 The emission levels of below 1 GHz are very lower (20dB lower than the limit) than the limit and not show in test report.

| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Lowest |
|-----------------|--------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3429.02 | Vertical | -31.99 | -13.00 | Pass |
| 5146.23 | V | -28.42 | | |
| 6872.55 | V | -32.87 | | |
| 8541.31 | V | -45.13 | | |
| 10330.22 | V | --- | | |
| 3428.76 | Horizontal | -31.52 | | |
| 5131.69 | H | -39.47 | | |
| 6869.78 | H | -37.36 | | |
| 8605.09 | H | -34.69 | | |
| 10244.96 | H | --- | | |
| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3443.25 | Vertical | -30.99 | -13.00 | Pass |
| 5141.79 | V | -30.47 | | |
| 6980.53 | V | -34.26 | | |
| 8666.89 | V | -44.17 | | |
| 10476.02 | V | --- | | |
| 3472.33 | Horizontal | -32.84 | | |
| 5119.43 | H | -38.76 | | |
| 6965.71 | H | -36.74 | | |
| 8716.47 | H | -35.81 | | |
| 10319.77 | H | --- | | |
| Test mode: | LTE Band 4(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3515.83 | Vertical | -31.18 | -13.00 | Pass |
| 5223.82 | V | -28.89 | | |
| 7031.77 | V | -31.63 | | |
| 8770.54 | V | -43.73 | | |
| 10666.97 | V | --- | | |
| 3545.57 | Horizontal | -32.05 | | |
| 5251.91 | H | -38.95 | | |
| 7060.22 | H | -36.51 | | |
| 8823.25 | H | -37.06 | | |
| 10547.46 | H | --- | | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst case is reported.
- 2 "Remark"---" means that the emission level is too low (20dB lower than the limit) to be measured
- 3 The emission levels of below 1 GHz are very lower (20dB lower than the limit) than the limit and not show in test report.

| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Lowest |
|-----------------|--------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1614.88 | Vertical | -32.77 | -13.00 | Pass |
| 2445.94 | V | -33.12 | | |
| 3224.51 | V | -33.47 | | |
| 4143.95 | V | -44.11 | | |
| 5073.58 | V | --- | | |
| 1811.92 | Horizontal | -31.37 | | |
| 2504.38 | H | -40.04 | | |
| 3885.48 | H | -35.90 | | |
| 4312.40 | H | -33.69 | | |
| 5147.87 | H | --- | | |
| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1638.96 | Vertical | -31.04 | -13.00 | Pass |
| 2422.78 | V | -29.44 | | |
| 3252.37 | V | -32.15 | | |
| 4288.43 | V | -43.72 | | |
| 5160.32 | V | --- | | |
| 4750.70 | Horizontal | -31.04 | | |
| 2667.87 | H | -37.91 | | |
| 3857.08 | H | -35.77 | | |
| 4426.14 | H | -35.46 | | |
| 5148.35 | H | --- | | |
| Test mode: | LTE Band 5(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1703.89 | Vertical | -34.09 | -13.00 | Pass |
| 2561.83 | V | -32.48 | | |
| 3420.75 | V | -32.12 | | |
| 4370.45 | V | -43.67 | | |
| 5260.75 | V | --- | | |
| 1752.36 | Horizontal | -31.93 | | |
| 2876.76 | H | -38.61 | | |
| 3440.95 | H | -37.34 | | |
| 4395.41 | H | -36.16 | | |
| 5148.29 | H | --- | | |

| Test mode: | LTE Band 19(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1362.57 | Vertical | -31.41 | -13.00 | Pass |
| 2696.41 | V | -34.54 | | |
| 3350.91 | V | -31.74 | | |
| 4220.10 | V | -42.61 | | |
| 5064.90 | V | --- | | |
| 1407.65 | Horizontal | -29.55 | | |
| 2504.92 | H | -38.69 | | |
| 3643.27 | H | -33.16 | | |
| 4328.75 | H | -30.59 | | |
| 5147.33 | H | --- | | |
| Test mode: | LTE Band 19(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1537.01 | Vertical | -30.34 | -13.00 | Pass |
| 2648.86 | V | -32.99 | | |
| 3450.45 | V | -32.94 | | |
| 4321.39 | V | -44.13 | | |
| 5256.08 | V | --- | | |
| 4845.13 | Horizontal | -29.51 | | |
| 2555.75 | H | -35.42 | | |
| 3955.88 | H | -35.25 | | |
| 4336.52 | H | -35.06 | | |
| 5364.78 | H | --- | | |
| Test mode: | LTE Band19(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1526.52 | Vertical | -35.63 | -13.00 | Pass |
| 2318.61 | V | -31.98 | | |
| 3586.36 | V | -33.02 | | |
| 4421.35 | V | -43.35 | | |
| 5404.76 | V | --- | | |
| 1745.10 | Horizontal | -30.70 | | |
| 2867.84 | H | -38.08 | | |
| 3566.85 | H | -36.08 | | |
| 4412.32 | H | -35.50 | | |
| 5147.15 | H | --- | | |

| Test mode: | LTE Band 7(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5229.81 | Vertical | -30.79 | -25.00 | Pass |
| 4862.06 | V | -29.00 | | |
| 10095.61 | V | -32.19 | | |
| 13594.94 | V | -44.10 | | |
| 15234.47 | V | --- | | |
| 5139.32 | Horizontal | -30.84 | | |
| 7946.18 | H | -38.27 | | |
| 10156.08 | H | -35.43 | | |
| 12813.23 | H | -35.79 | | |
| 15138.48 | H | --- | | |
| Test mode: | LTE Band 7(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5158.36 | Vertical | -29.89 | -25.00 | Pass |
| 7641.45 | V | -31.12 | | |
| 10225.45 | V | -31.41 | | |
| 13285.91 | V | -44.27 | | |
| 15637.66 | V | --- | | |
| 5131.49 | Horizontal | -33.44 | | |
| 7739.34 | H | -38.47 | | |
| 10279.22 | H | -35.21 | | |
| 13878.61 | H | -33.20 | | |
| 15363.82 | H | --- | | |
| Test mode: | LTE Band 7(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5240.80 | Vertical | -33.11 | -25.00 | Pass |
| 7884.78 | V | -34.60 | | |
| 10349.40 | V | -31.11 | | |
| 12924.73 | V | -44.59 | | |
| 15442.31 | V | --- | | |
| 5227.21 | Horizontal | -31.81 | | |
| 7739.54 | H | -38.40 | | |
| 10358.50 | H | -36.29 | | |
| 12779.08 | H | -36.13 | | |
| 15364.17 | H | --- | | |

| Test mode: | LTE Band 25(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------------|---------------|---------|
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| | | Polarization | | |
| 5135.12 | Vertical | -32.50 | -13.00 | Pass |
| 7638.71 | V | -30.57 | | |
| 10125.54 | V | -34.20 | | |
| 12263.23 | V | -40.56 | | |
| 15331.21 | V | --- | | |
| 5049.73 | Horizontal | -33.39 | -13.00 | Pass |
| 7541.65 | H | -35.31 | | |
| 10559.99 | H | -30.73 | | |
| 12622.55 | H | -32.77 | | |
| 15241.99 | H | --- | | |
| Test mode: | LTE Band 25(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| | | Polarization | | |
| 5252.16 | Vertical | -31.19 | -13.00 | Pass |
| 7643.01 | V | -28.91 | | |
| 10226.53 | V | -30.52 | | |
| 12543.05 | V | -41.92 | | |
| 15514.29 | V | --- | | |
| 5220.57 | Horizontal | -28.25 | -13.00 | Pass |
| 7521.50 | H | -31.76 | | |
| 10267.03 | H | -35.14 | | |
| 13592.52 | H | -35.33 | | |
| 15319.12 | H | --- | | |
| Test mode: | LTE Band 25(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | | Spurious Emission | Limit (dBm) | Result |
| | | Polarization | | |
| 5211.87 | Vertical | -29.88 | -13.00 | Pass |
| 7863.82 | V | -31.46 | | |
| 10012.98 | V | -29.57 | | |
| 12237.14 | V | -43.72 | | |
| 15505.24 | V | --- | | |
| 5307.82 | Horizontal | -33.51 | -13.00 | Pass |
| 7825.48 | H | -38.00 | | |
| 10404.84 | H | -35.29 | | |
| 12267.30 | H | -33.46 | | |
| 15327.37 | H | --- | | |

| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Lowest |
|-----------------------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3431.17 | Vertical | -30.83 | -13.00 | Pass |
| 7819.72 | V | -30.94 | | |
| 10132.07 | V | -29.13 | | |
| 12317.40 | V | -43.42 | | |
| 16343.78 | V | --- | | |
| 5194.12 | Horizontal | -27.02 | -13.00 | Pass |
| 7622.11 | H | -38.23 | | |
| 10264.27 | H | -36.03 | | |
| 12593.59 | H | -33.23 | | |
| 15219.94 | H | --- | | |
| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5132.21 | Vertical | -28.60 | -13.00 | Pass |
| 7644.56 | V | -27.92 | | |
| 10248.73 | V | -30.64 | | |
| 13280.19 | V | -41.11 | | |
| 15650.82 | V | --- | | |
| 5237.76 | Horizontal | -27.93 | -13.00 | Pass |
| 7701.26 | H | -32.16 | | |
| 10285.94 | H | -34.77 | | |
| 12662.43 | H | -34.23 | | |
| 15269.22 | H | --- | | |
| Test mode (814-824MHz) : | LTE Band 26(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 5228.85 | Vertical | -32.78 | -13.00 | Pass |
| 7828.00 | V | -29.02 | | |
| 10350.11 | V | -33.07 | | |
| 12870.01 | V | -41.53 | | |
| 15445.01 | V | --- | | |
| 5143.94 | Horizontal | -31.13 | -13.00 | Pass |
| 7825.25 | H | -37.03 | | |
| 10344.76 | H | -33.99 | | |
| 12998.26 | H | -34.65 | | |
| 15271.07 | H | --- | | |

| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Lowest |
|-----------------------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3915.81 | Vertical | -31.97 | -13.00 | Pass |
| 5703.85 | V | -28.58 | | |
| 10252.21 | V | -30.19 | | |
| 12295.67 | V | -43.75 | | |
| 13526.98 | V | --- | | |
| 3846.15 | Horizontal | -33.86 | -13.00 | Pass |
| 7268.48 | H | -36.26 | | |
| 10307.44 | H | -35.66 | | |
| 12123.00 | H | -36.05 | | |
| 13343.67 | H | --- | | |
| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3692.27 | Vertical | -31.86 | -13.00 | Pass |
| 7910.59 | V | -28.64 | | |
| 10451.80 | V | -30.25 | | |
| 12033.80 | V | -43.39 | | |
| 15888.43 | V | --- | | |
| 3845.81 | Horizontal | -31.10 | -13.00 | Pass |
| 7585.11 | H | -38.51 | | |
| 10487.62 | H | -34.81 | | |
| 12534.25 | H | -35.25 | | |
| 15336.63 | H | --- | | |
| Test mode (824-849MHz) : | LTE Band 26(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3865.98 | Vertical | -29.31 | -13.00 | Pass |
| 7831.10 | V | -25.98 | | |
| 10451.75 | V | -32.80 | | |
| 12341.34 | V | -44.21 | | |
| 15617.72 | V | --- | | |
| 3904.09 | Horizontal | -29.58 | -13.00 | Pass |
| 7838.76 | H | -35.95 | | |
| 10457.91 | H | -36.12 | | |
| 12384.14 | H | -36.62 | | |
| 15287.48 | H | --- | | |

| Test mode | LTE Band 38(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2629.63 | Vertical | -30.84 | -25.00 | Pass |
| 5256.83 | V | -31.07 | | |
| 10565.31 | V | -30.43 | | |
| 12217.89 | V | -43.34 | | |
| 13698.13 | V | --- | | |
| 2643.46 | Horizontal | -33.05 | -25.00 | Pass |
| 5233.68 | H | -37.93 | | |
| 10853.26 | H | -36.97 | | |
| 12305.06 | H | -36.77 | | |
| 13264.75 | H | --- | | |
| Test mode | LTE Band 38(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2758.98 | Vertical | -29.10 | -25.00 | Pass |
| 5484.58 | V | -33.19 | | |
| 10639.60 | V | -31.38 | | |
| 12867.04 | V | -45.78 | | |
| 15709.81 | V | --- | | |
| 2688.00 | Horizontal | -33.24 | -25.00 | Pass |
| 5436.75 | H | -37.18 | | |
| 10840.84 | H | -36.89 | | |
| 12309.80 | H | -36.21 | | |
| 15330.94 | H | --- | | |
| Test mode | LTE Band 38(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2627.13 | Vertical | -30.23 | -25.00 | Pass |
| 6894.93 | V | -32.48 | | |
| 10439.98 | V | -30.52 | | |
| 12727.25 | V | -43.30 | | |
| 15638.52 | V | --- | | |
| 2689.94 | Horizontal | -28.71 | -25.00 | Pass |
| 5192.76 | H | -36.73 | | |
| 10762.07 | H | -36.32 | | |
| 13308.03 | H | -36.31 | | |
| 16260.90 | H | --- | | |

| Test mode | LTE Band 41(5MHz) | | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3676.54 | Vertical | -28.02 | -25.00 | Pass |
| 8634.73 | V | -32.92 | | |
| 10233.11 | V | -34.27 | | |
| 12662.87 | V | -43.86 | | |
| 13375.73 | V | --- | | |
| 3992.05 | Horizontal | -31.65 | | |
| 9811.61 | H | -38.77 | | |
| 10274.10 | H | -36.78 | | |
| 12318.26 | H | -34.81 | | |
| 13164.93 | H | --- | | |
| Test mode | LTE Band 41(5MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3577.53 | Vertical | -31.61 | -25.00 | Pass |
| 5976.05 | V | -32.80 | | |
| 8945.06 | V | -32.38 | | |
| 10238.52 | V | -44.22 | | |
| 13802.39 | V | --- | | |
| 5870.27 | Horizontal | -29.78 | | |
| 7236.23 | H | -41.14 | | |
| 10342.12 | H | -34.70 | | |
| 12305.64 | H | -26.21 | | |
| 13262.50 | H | --- | | |
| Test mode | LTE Band 41(5MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3116.82 | Vertical | -33.13 | -25.00 | Pass |
| 5637.93 | V | -32.99 | | |
| 8943.86 | V | -34.25 | | |
| 10362.26 | V | -44.08 | | |
| 12876.54 | V | --- | | |
| 5131.77 | Horizontal | -32.55 | | |
| 8676.04 | H | -38.76 | | |
| 10302.46 | H | -35.99 | | |
| 12710.82 | H | -36.49 | | |
| 13591.87 | H | --- | | |

| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Lowest |
|-----------------|---------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3316.15 | Vertical | -31.67 | -13.00 | Pass |
| 5688.78 | V | -33.03 | | |
| 7306.13 | V | -32.52 | | |
| 8300.12 | V | -44.66 | | |
| 10442.42 | V | --- | | |
| 3334.92 | Horizontal | -33.22 | | |
| 5230.82 | H | -38.98 | | |
| 6951.66 | H | -37.48 | | |
| 8916.35 | H | -37.39 | | |
| 10269.20 | H | --- | | |
| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 2887.34 | Vertical | -35.73 | -13.00 | Pass |
| 5370.62 | V | -34.99 | | |
| 7517.20 | V | -35.12 | | |
| 9866.93 | V | -45.12 | | |
| 10368.81 | V | --- | | |
| 3021.87 | Horizontal | -33.22 | | |
| 5235.92 | H | -38.40 | | |
| 7652.47 | H | -36.93 | | |
| 8886.25 | H | -35.69 | | |
| 10401.34 | H | --- | | |
| Test mode: | LTE Band 66(1.4MHz) | | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3749.72 | Vertical | -31.39 | -13.00 | Pass |
| 5315.04 | V | -27.84 | | |
| 7234.16 | V | -33.19 | | |
| 8632.21 | V | -46.34 | | |
| 10575.36 | V | --- | | |
| 3335.96 | Horizontal | -32.85 | | |
| 5293.16 | H | -40.89 | | |
| 7329.76 | H | -38.13 | | |
| 8880.31 | H | -36.55 | | |
| 10128.91 | H | --- | | |

Remark:

1. The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst case is reported.
2. Remark"---" means that the emission level is too low (20dB lower than the limit) to be measured
3. The emission levels of below 1 GHz are very lower (20dB lower than the limit) than the limit and not show in test report.

6 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

7 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III Internal Photos



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--