

Product Name:Tablet	Report No: ITEZA2-202400365RF4
Product Model: U11, U11 Pro, U11 Max, U11 Plus, U11 Pro Max, U11 KID, U12, U12 Pro, U12 Max, U13, U13 Pro, U13 Max, U14, U14 Pro, U14 Max	Security Classification: Open
Version: V1.0	Total Page:102

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

FCCRadio Test Report

FCC ID: 2AX4YU11

This report concerns:Original Grant

Applicant:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Sample No:	1000040010
Product Name:	Tablet
Brand Name:	DOOGEE
Model No.:	U11, U11 Pro, U11 Max, U11 Plus, U11 Pro Max, U11 KID, U12, U12 Pro, U12 Max, U13, U13 Pro, U13 Max, U14, U14 Pro, U14 Max
Test No.:	U11

Date of Receipt:	2024/10/15
Date of Test:	2024/10/15~2024/10/18
Issued Date:	2024/11/08
Testing Lab:	TIRT

Note: This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	11
2.3 DUTY CYCLE	12
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	23
2.5 SUPPORT UNITS	23
3 .AC POWER LINE CONDUCTED EMISSIONS	24
3.1 LIMIT	24
3.2 TEST PROCEDURE	24
3.3 DEVIATIONFROMTESTSTANDARD	24
3.4 TESTSETUP	25
3.5 EUT OPERATION CONDITIONS	25
3.6 TEST RESULTS	25
4 . RADIATED EMISSIONS	26
4.1 LIMIT	26
4.2 TEST PROCEDURE	26
4.3 DEVIATIONFROMTESTSTANDARD	28
4.4 TESTSETUP	28
4.5 EUT OPERATION CONDITIONS	29
4.6 TEST RESULTS - 9 KHZTO 30MHZ	29
4.7 TEST RESULTS - 30 MHZTO 1000 MHZ	29
4.8 TEST RESULTS - ABOVE1000 MHZ	29
5 .BANDWIDTH	30
5.1 LIMIT	30
5.2 TEST PROCEDURE	30
5.3 DEVIATION FROM STANDARD	30
5.4 TEST SETUP	31
5.5 EUT OPERATION CONDITIONS	31

5.6 TEST RESULTS	31
6 .MAXIMUM OUTPUT POWER	32
6.1 LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32
7 .POWER SPECTRAL DENSITY	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM STANDARD	33
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8 .FREQUENCY STABILITY	35
8.1 LIMIT	35
8.2 TEST PROCEDURE	35
8.3 DEVIATION FROM STANDARD	35
8.4 TEST SETUP	35
8.5 EUT OPERATION CONDITIONS	35
8.6 TEST RESULTS	35
9 . MEASUREMENT INSTRUMENTS LIST	36
10 .EUT TEST PHOTOS	37
11 .EUT PHOTOS	39
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	47
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	49
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	50
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	52
APPENDIXE -BANDWIDTH	64
APPENDIXF -MAXIMUM OUTPUT POWER	75
APPENDIXG - POWER SPECTRAL DENSITY	86
APPENDIX H - Frequency Stability	97

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400365RF4	V1.0	Original Report.	2024.11.08	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐Outdoor access point device
 - ☐Indoor access point device
 - ☐Fixed point-to-point access points device
 - ☒Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).
- (6) Measurement Standard Used:
 - FCC Rules and Regulations Part 15 Subpart E
 - ANSI C63.4:2014, ANSI C63.10:2013

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 5V from adapter	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	DC 3.8V from battery or DC 5V from adapter	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 3.8V from battery or DC 5V from adapter	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	DC 3.8V from battery or DC 5V from adapter	Stone Tang
Bandwidth	25.0°C	56%	DC 3.8V from battery or DC 5V from adapter	Stone Tang
Maximum Output Power	24.9°C	54%	DC 3.8V from battery or DC 5V from adapter	Stone Tang
Power Spectral Density	25.1°C	62%	DC 3.8V from battery or DC 5V from adapter	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet
Brand Name	DOOGEE
Test Model	U11
Series Model	U11, U11 Pro, U11 Max, U11 Plus, U11 Pro Max, U11 KID, U12, U12 Pro, U12 Max, U13, U13 Pro, U13 Max, U14, U14 Pro, U14 Max
Model Difference(s)	There is no difference, except for the appearance color and name. The circuit and principle are the same. All tests were conducted using the U11 model.
Software Version	DOOGEE-U11-EEA-Android14.0-20240919
Hardware Version	T30-T616-V2.0-240311-LU
Power Rating	DC 3.8V from battery or DC 5V from adapter
Operation FrequencyBand(s)	UNII-1: 5180 MHz~5240 MHz UNII-3: 5745 MHz~5825MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Maximum Output Power UNII-1	IEEE 802.11ac(VHT80): 14.80dBm(0.030200W)
Maximum Output Power UNII-3	IEEE 802.11a: 10.02dBm(0.010046W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3. Antenna Specification:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	SHENZHEN HENGXIANGTONGANTENNA TECNOLOGY CO., LTD.	T2	PIFA	N/A	0.97

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing purposes only.

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation
Remark: Per-scan all kind of data rate, and report only reflects the test data of worst data rate mode.	

2.3DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.


The power spectral density = measured power spectral density + duty factor.

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	1.39	1.43	97.20	---	---
		5200	1.39	1.43	97.20	---	---
		5240	1.40	1.43	97.90	---	---
		5745	1.39	1.43	97.20	---	---
		5785	1.39	1.43	97.20	---	---
		5825	1.40	1.43	97.90	---	---
11N20SISO	Ant1	5180	0.17	0.20	85.00	---	---
		5200	0.17	0.20	85.00	---	---
		5240	0.16	0.20	80.00	---	---
		5745	0.17	0.20	85.00	---	---
		5785	0.16	0.20	80.00	---	---
		5825	0.16	0.20	80.00	---	---
11N40SISO	Ant1	5190	0.10	0.14	71.43	---	---
		5230	0.10	0.14	71.43	---	---
		5755	0.10	0.14	71.43	---	---
		5795	0.10	0.14	71.43	---	---
11AC20SISO	Ant1	5180	0.17	0.21	80.95	---	---
		5200	0.17	0.21	80.95	---	---
		5240	0.17	0.20	85.00	---	---
		5745	0.17	0.20	85.00	---	---
		5785	0.17	0.21	80.95	---	---
		5825	0.17	0.21	80.95	---	---
11AC40SISO	Ant1	5190	0.10	0.14	71.43	---	---
		5230	0.10	0.14	71.43	---	---
		5755	0.10	0.14	71.43	---	---
		5795	0.10	0.14	71.43	---	---
11AC80SISO	Ant1	5210	0.07	0.20	35.00	---	---
		5775	0.07	0.13	53.85	---	---


11A_Ant1_5180

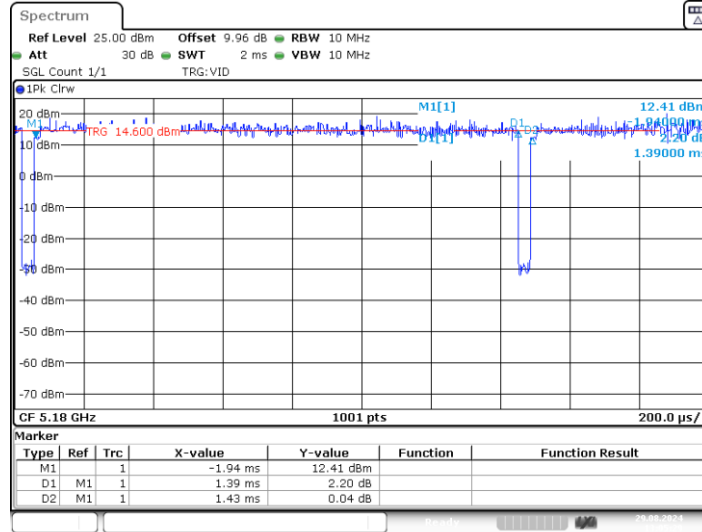



11A_Ant1_5200

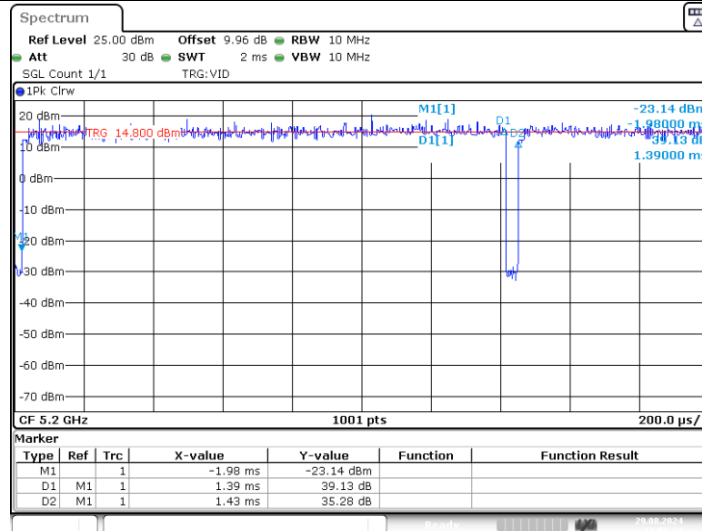

11A_Ant1_5240

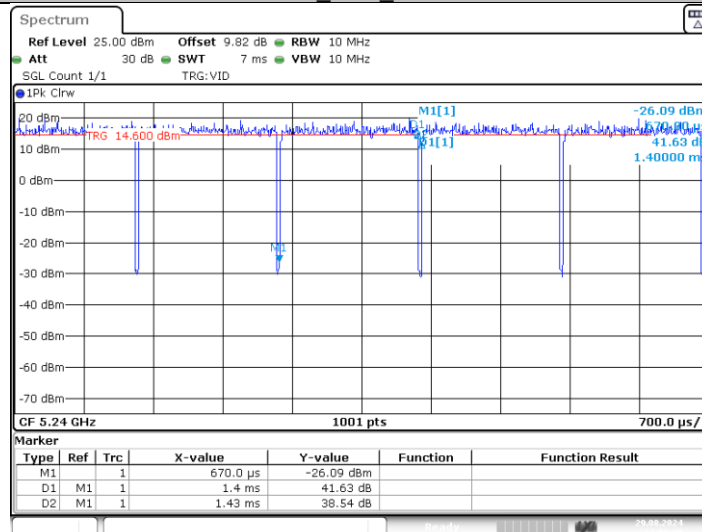

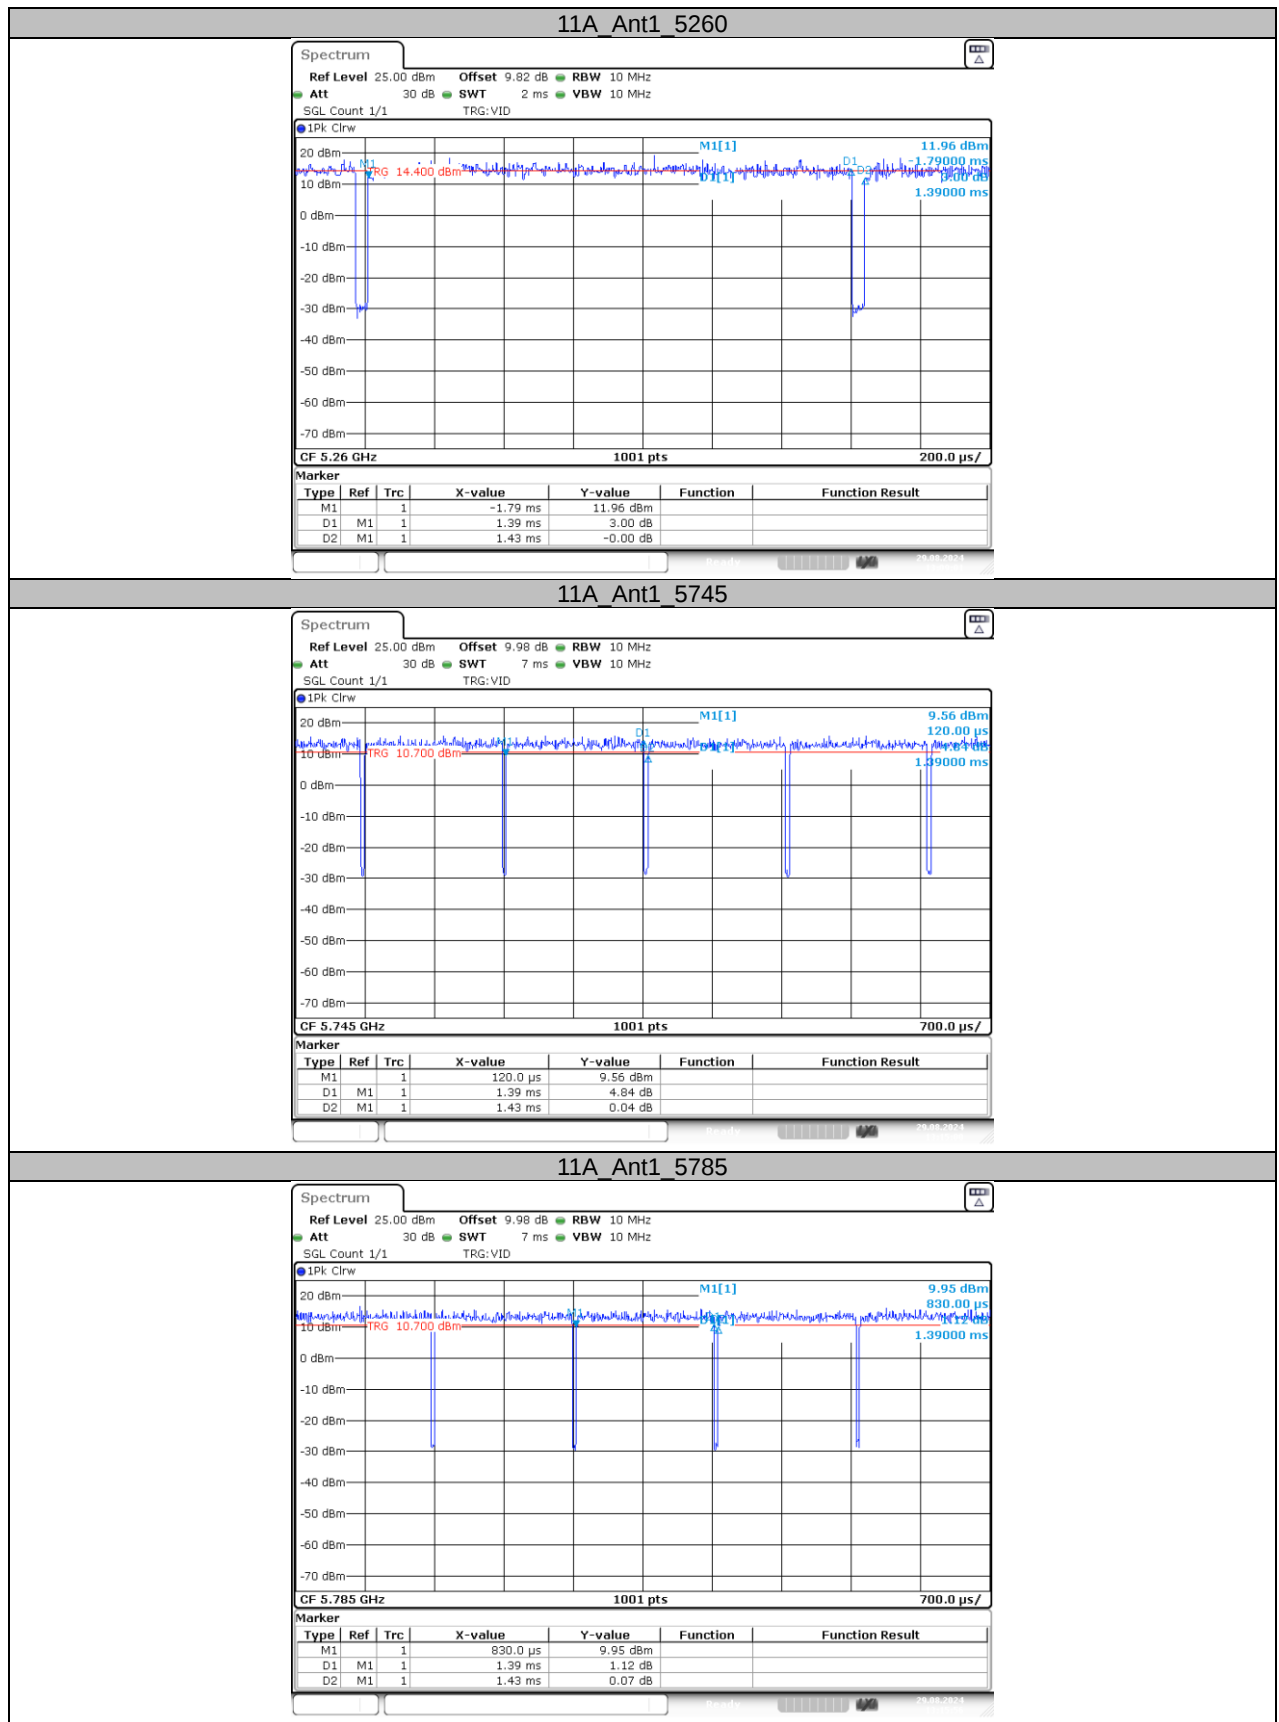


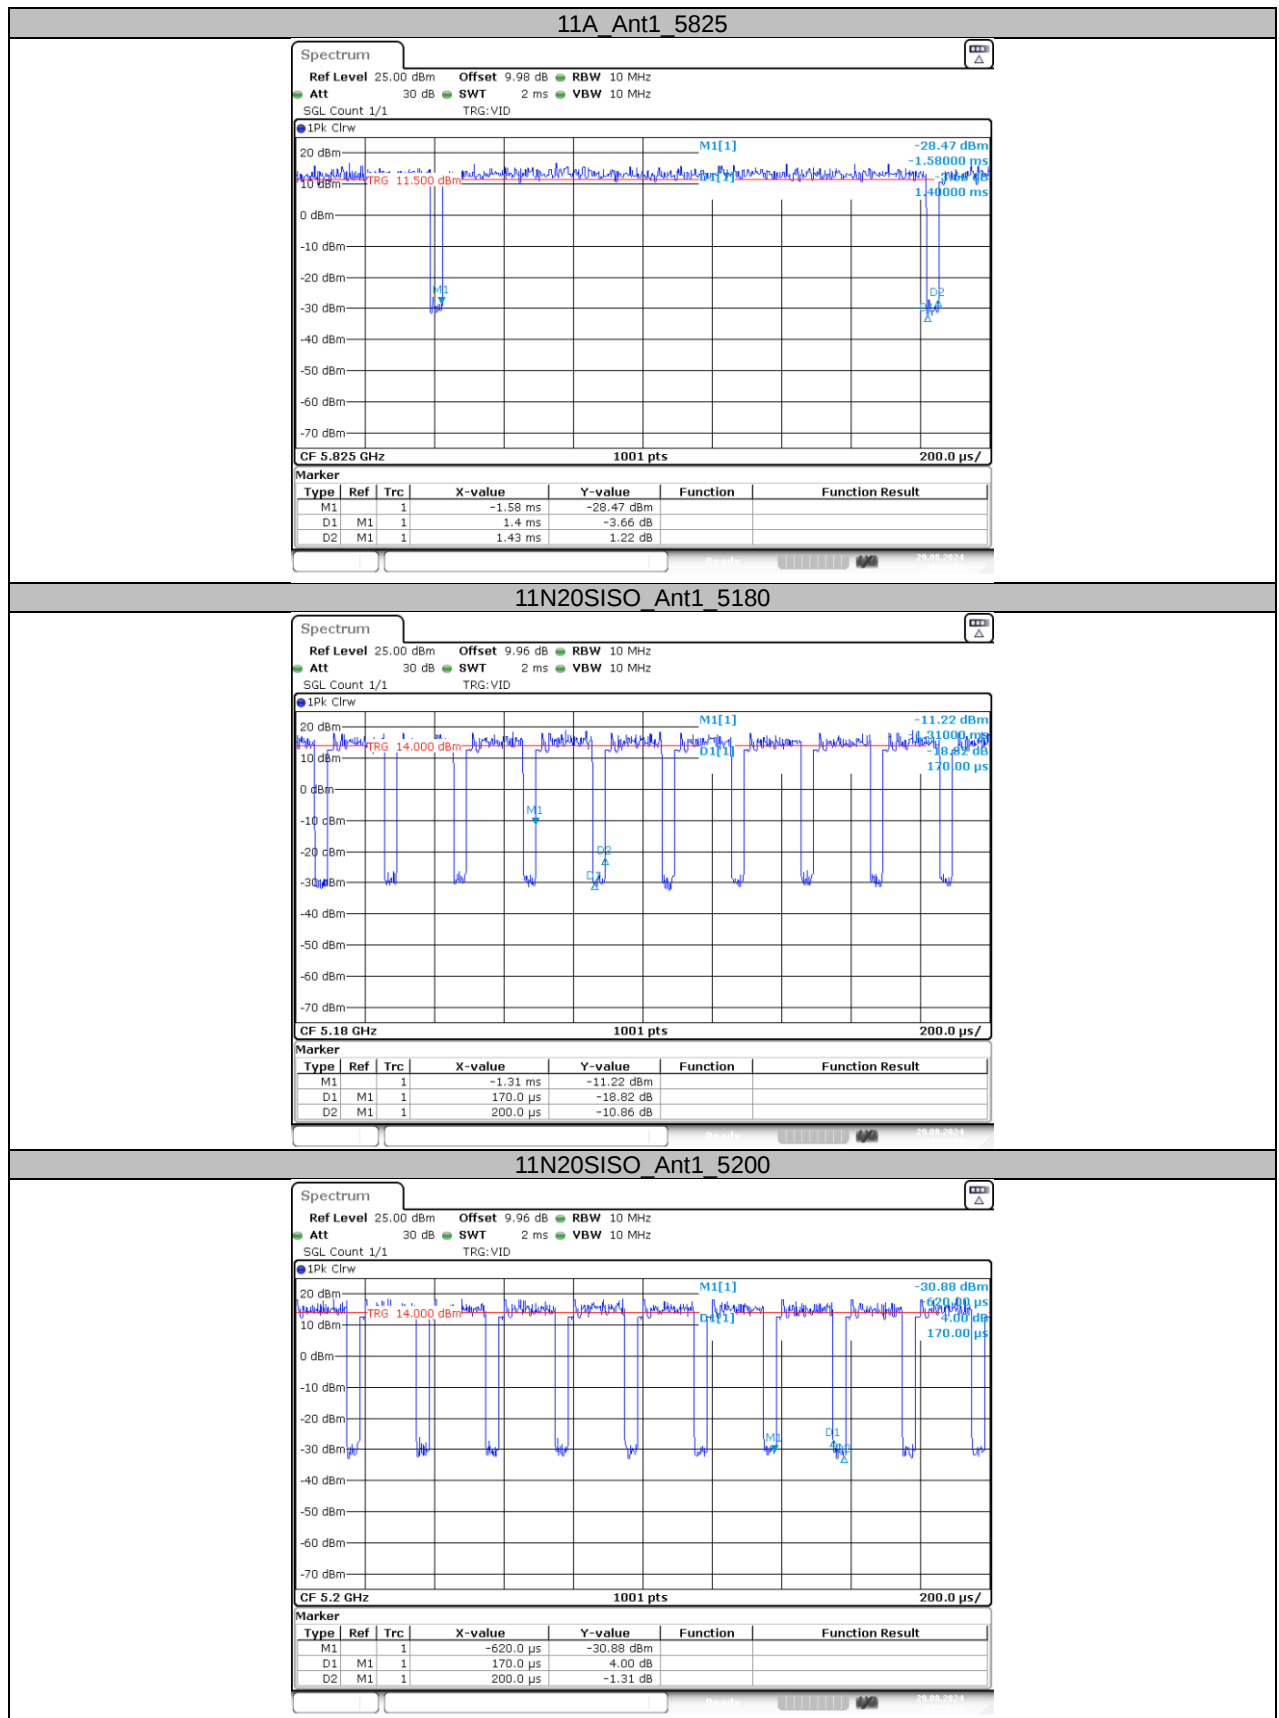









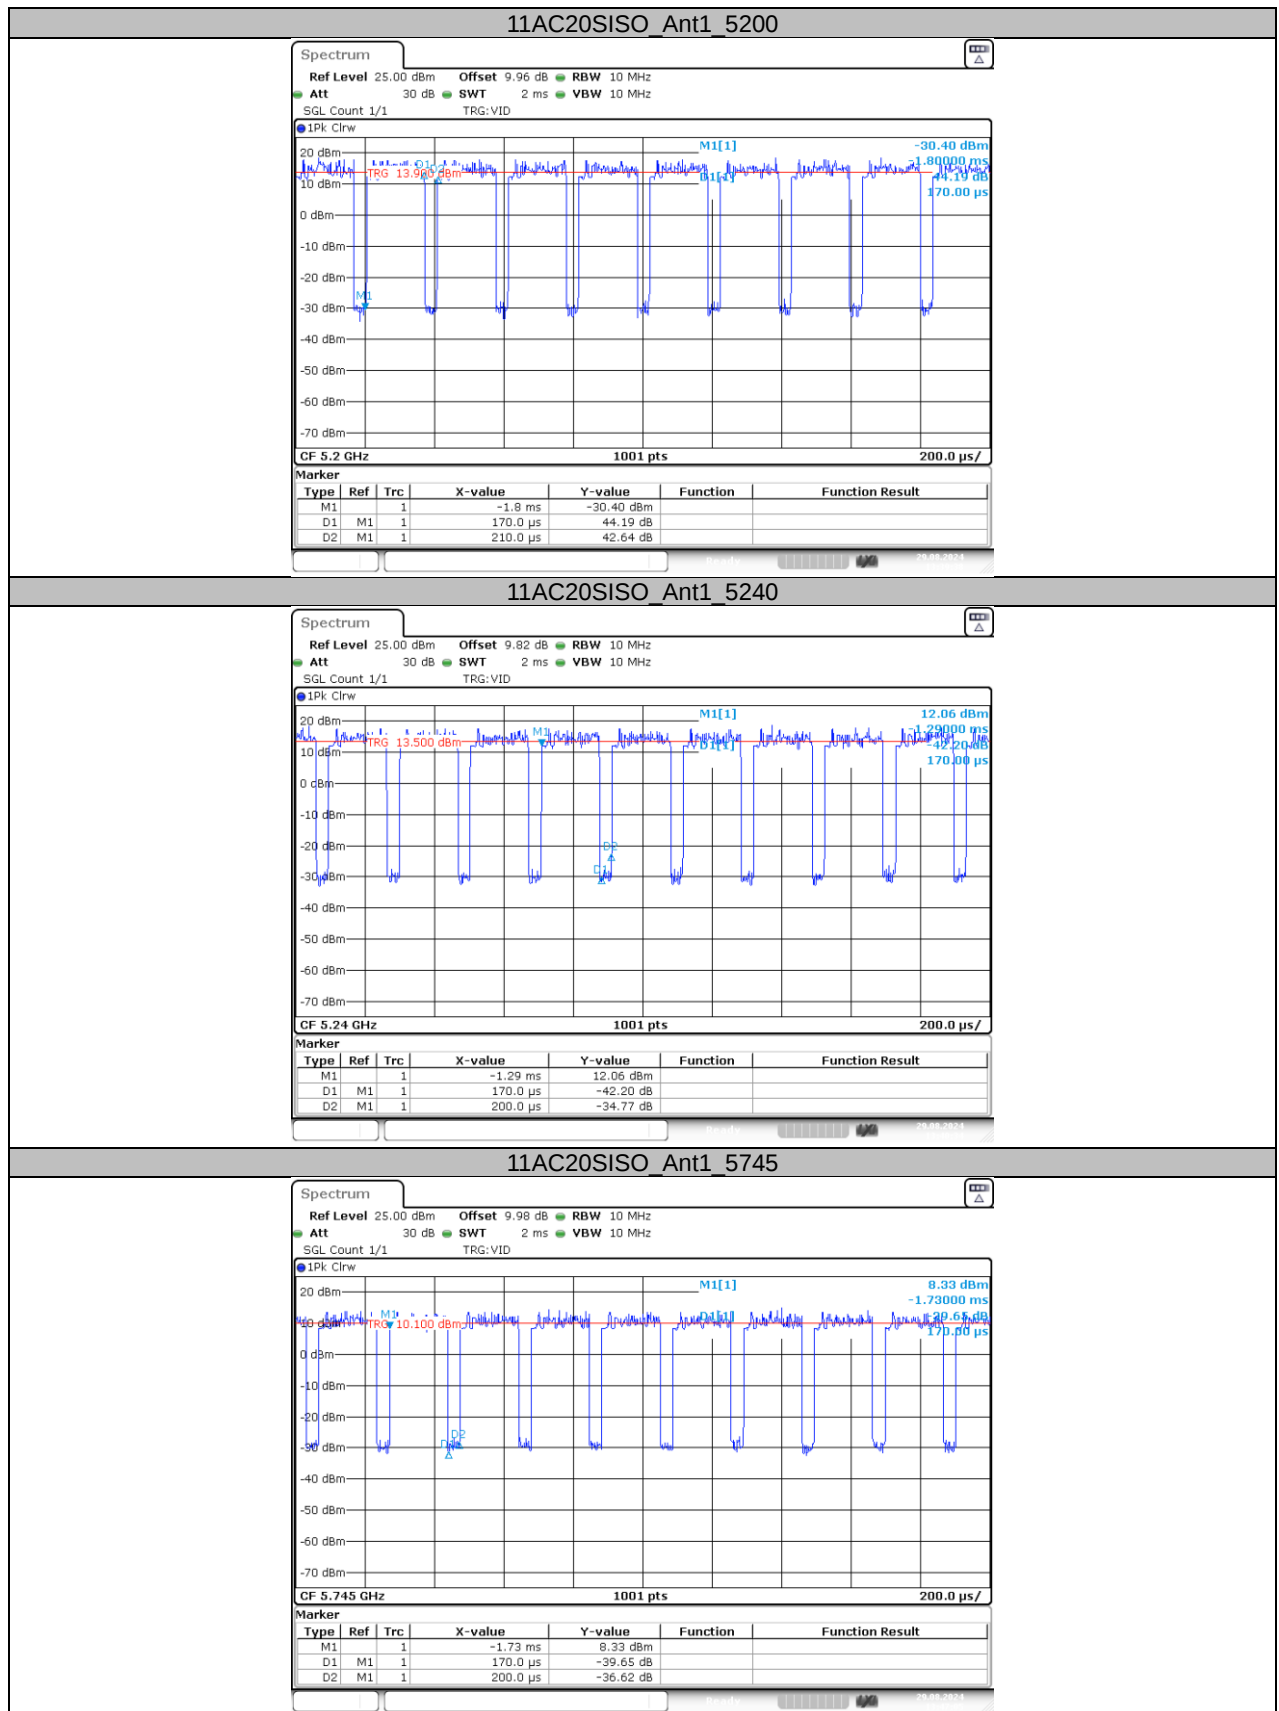


11AC20SISO_Ant1_5785

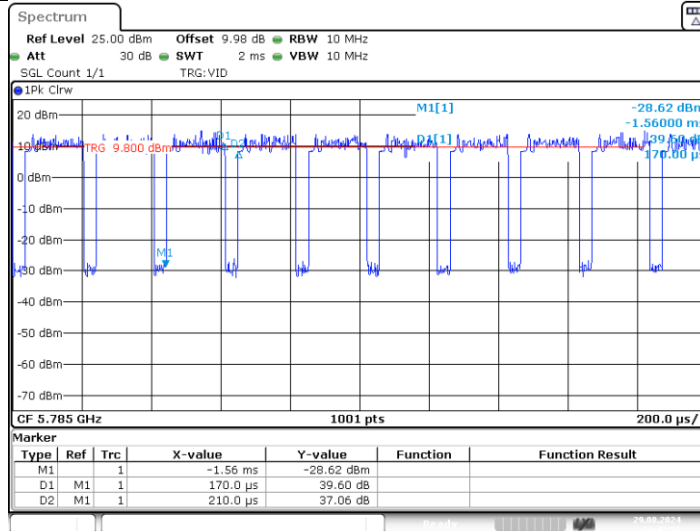



11AC20SISO_Ant1_5825

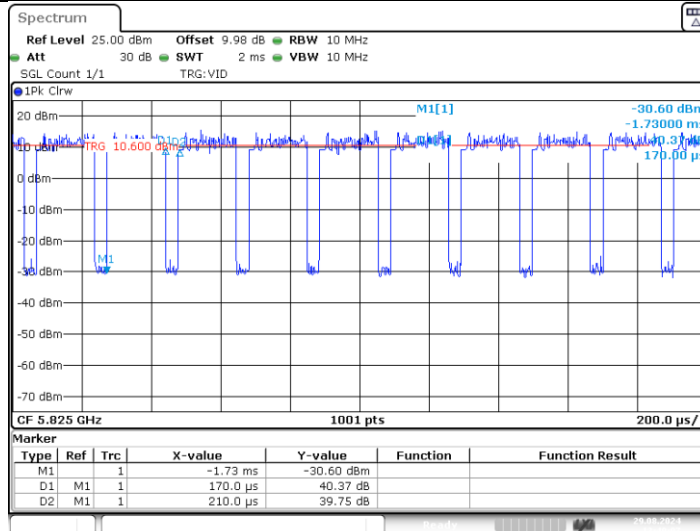

11AC40SISO_Ant1_5190

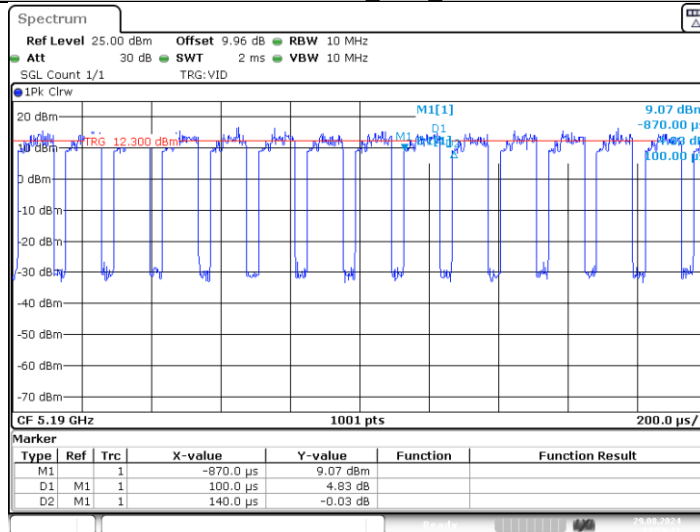

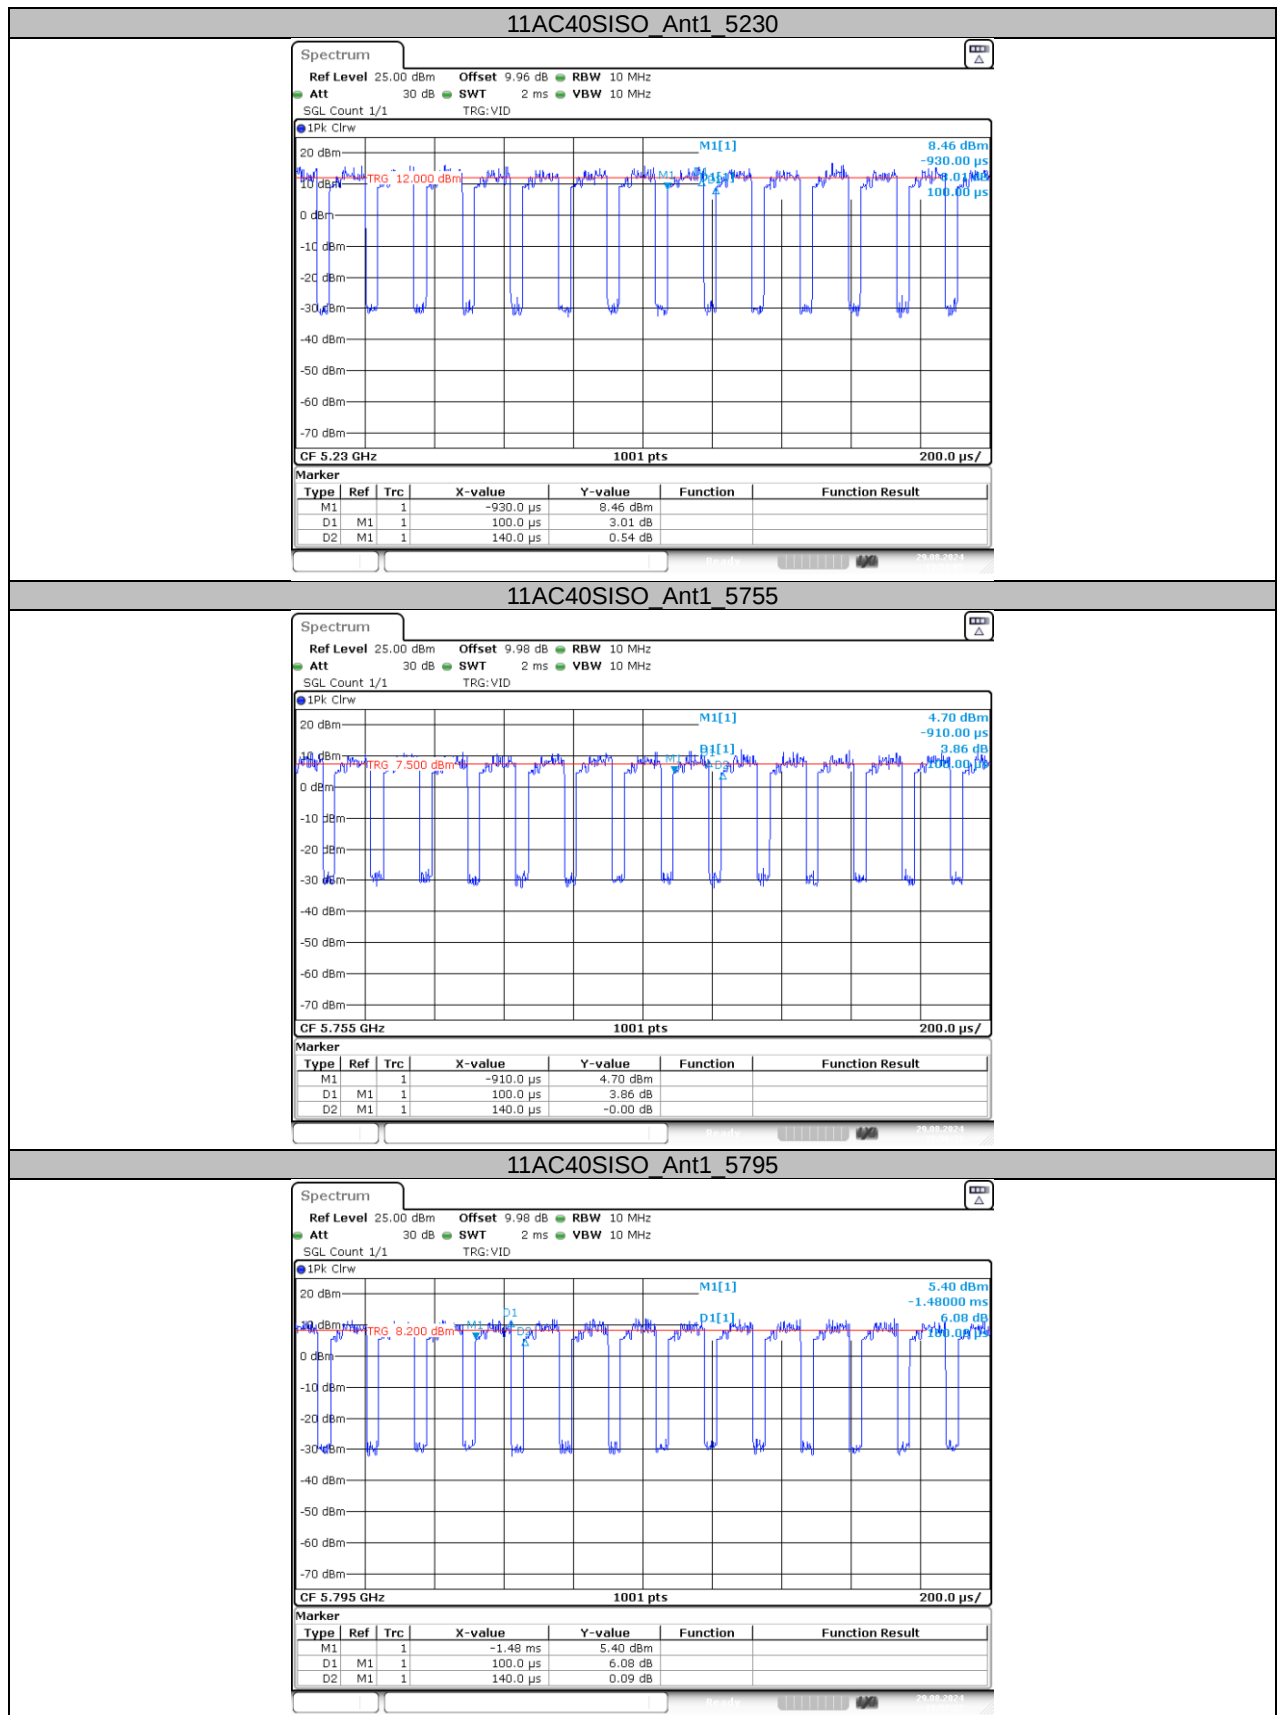

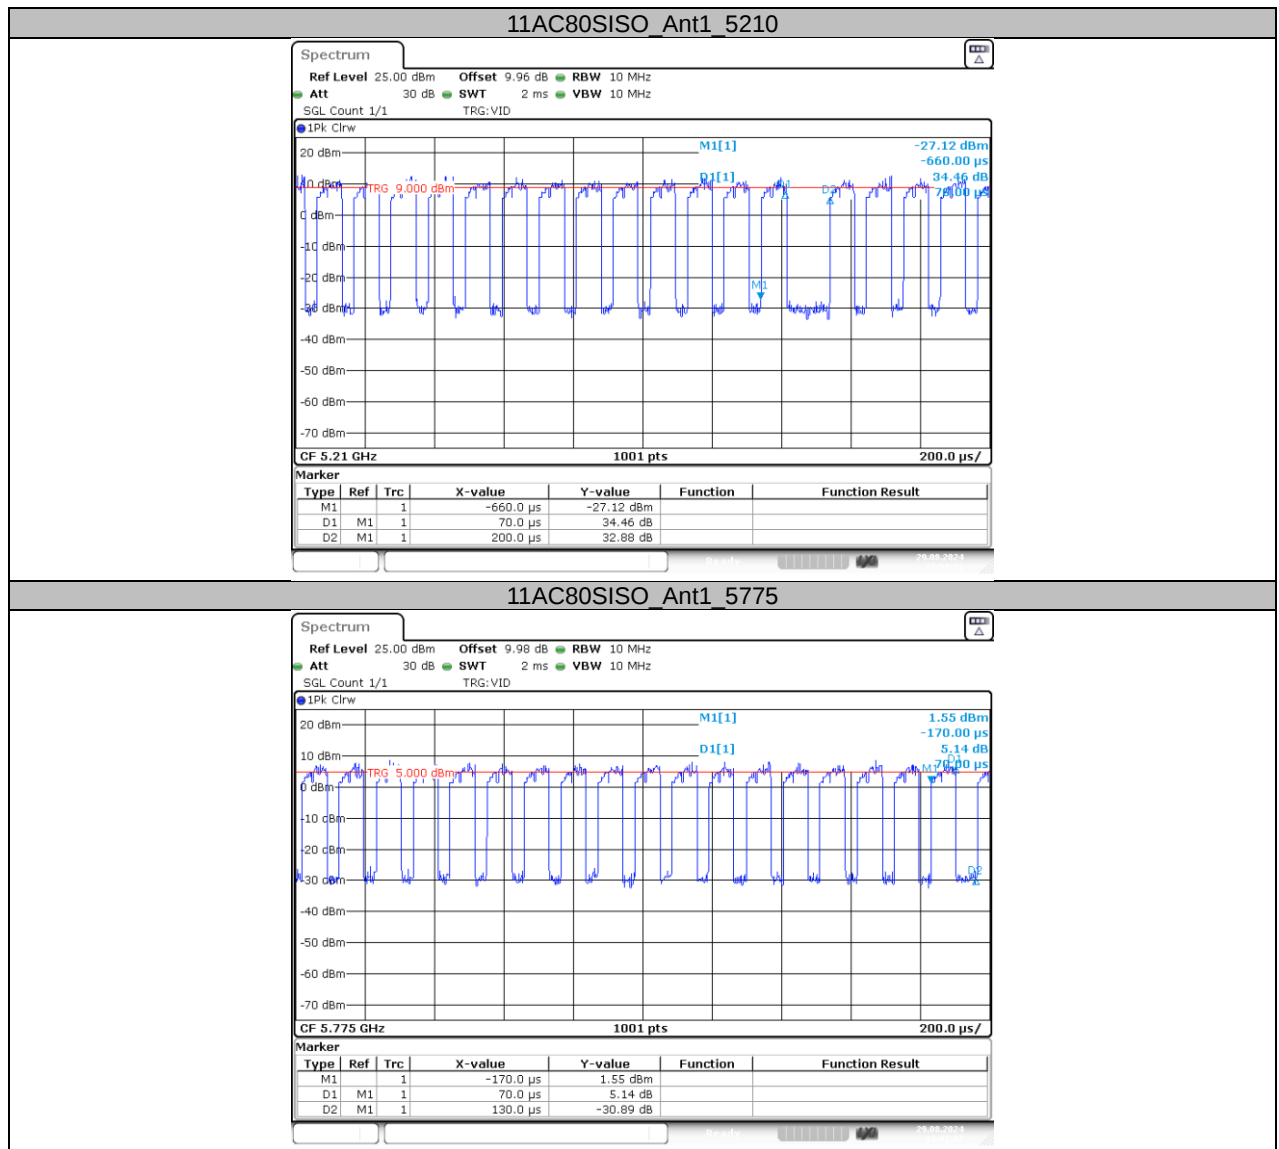

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

EUT

2.5 SUPPORT UNITS

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

3.AC POWER LINE CONDUCTED EMISSIONS

3.1LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3DEVIATIONFROMTESTSTANDARD

No deviation

3.4 TEST SETUP

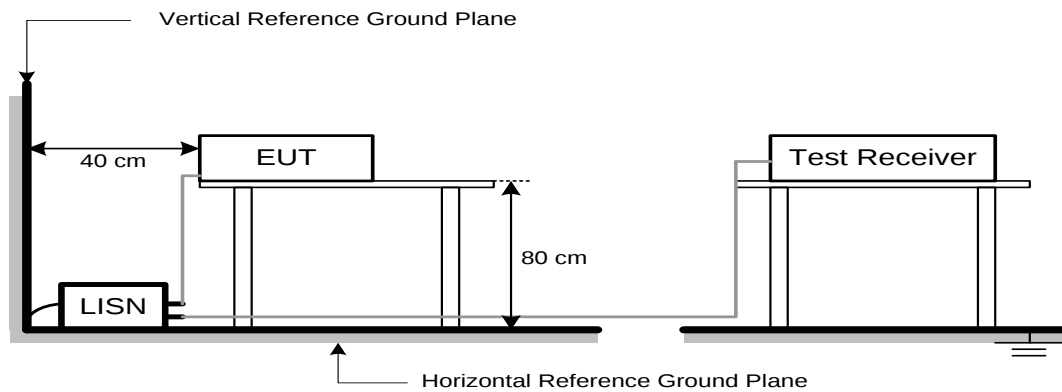

The LISN edge is arranged parallel to the edge of the test table

The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850 NOTE (2)	-27	68.2
	10	105.2
	15.6	110.8
	27	122.2

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~40GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

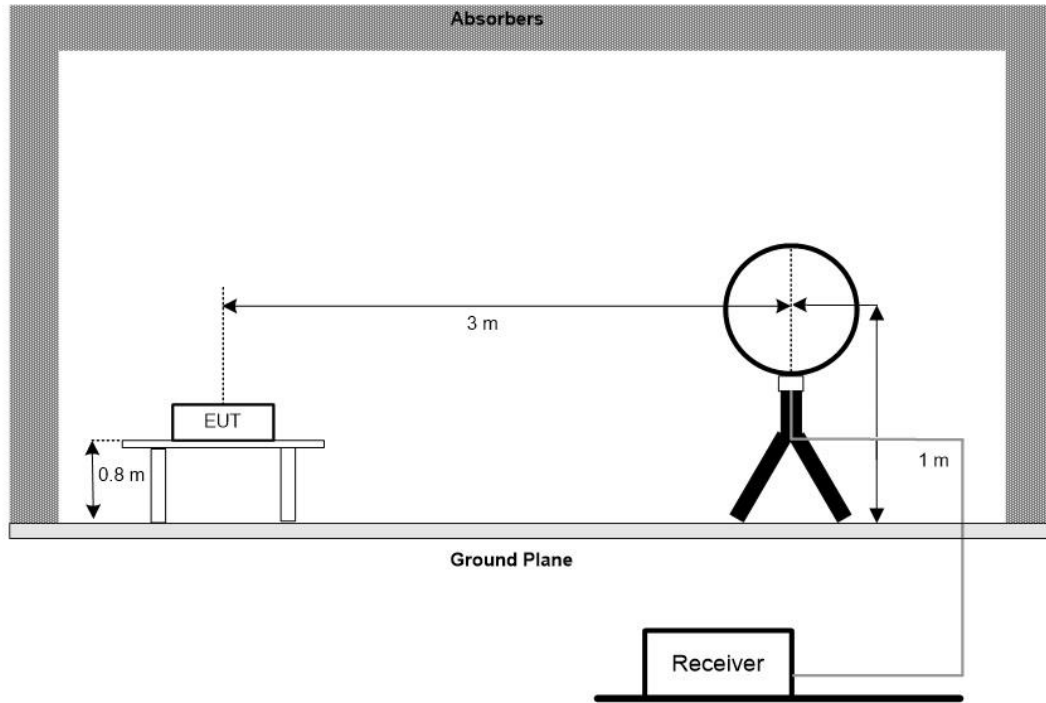

30 MHz to 1 GHz

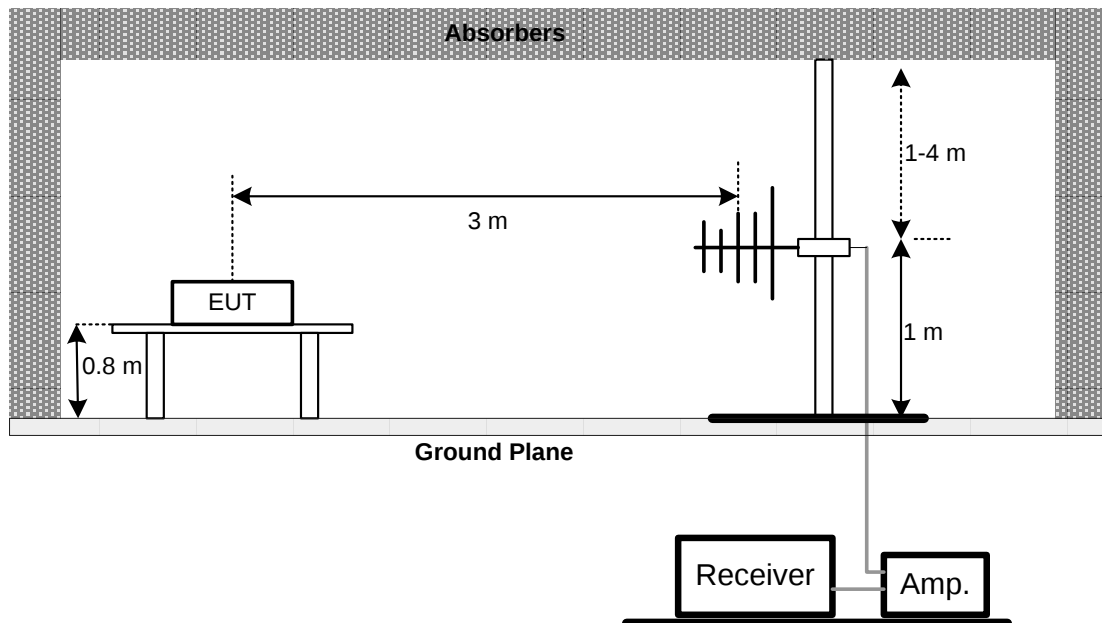

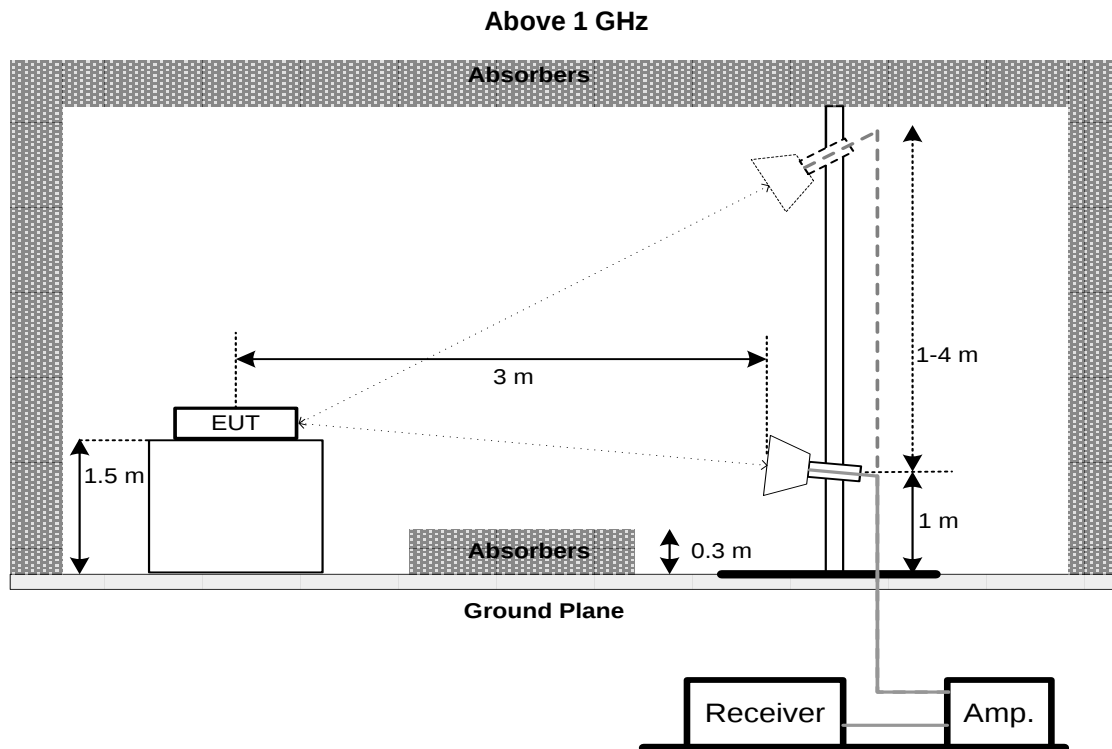

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5.BANDWIDTH

5.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6dB Bandwidth	Minimum 500 kHz	5725-5850

5.2TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

b. Spectrum Setting:

For UNII-1

Spectrum Parameter	Setting
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6dB Bandwidth
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB / 6dB below carrier.

5.3DEVIATION FROM STANDARD

No deviation.

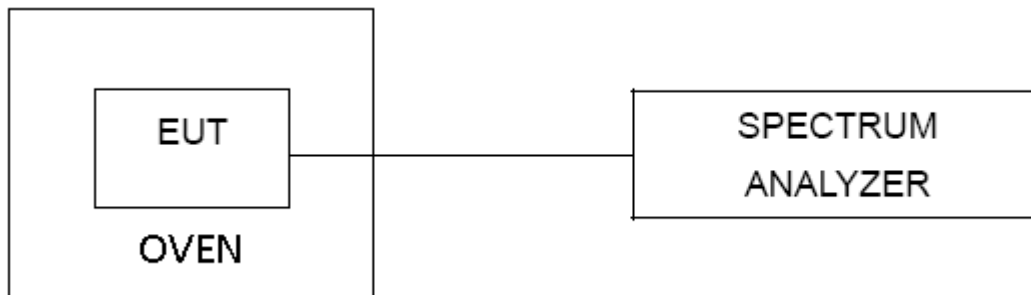5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6.MAXIMUM OUTPUT POWER

6.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	MaximumOutput Power	AP device:1 Watt (30dBm) Client device: 250mW (23.98dBm)	5150-5250
		250mW (23.98dBm)	5250-5350
		250mW (23.98dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


6.2TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3DEVIATION FROM STANDARD

No deviation.

6.4TEST SETUP

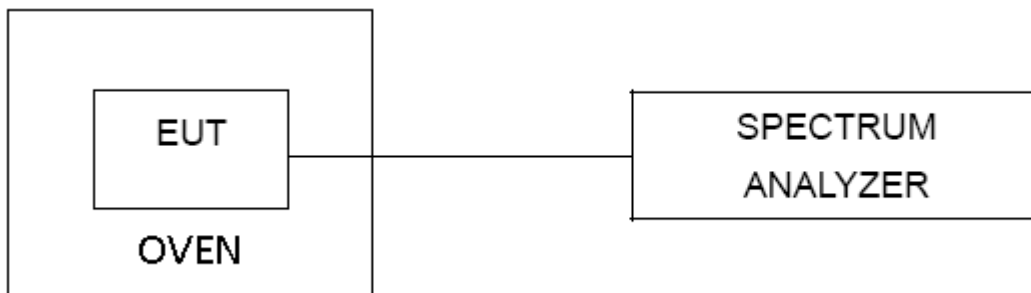

6.5EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7.POWER SPECTRAL DENSITY

7.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device:17dBm/MHz Client device:11dBm/MHz	5150-5250
		11dBm/MHz	5250-5350
		11dBm/MHz	5470-5725
		30dBm/500kHz	5725-5850

7.2TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1


Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz.
VBW	3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz.
VBW	3MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

7.3DEVIATION FROM STANDARD

No deviation.

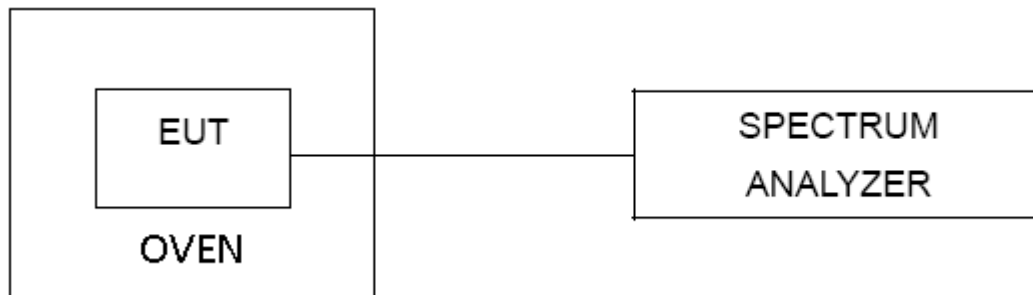7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIXG.

8.FREQUENCY STABILITY

8.1LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

8.2TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissionsbandwidth
RBW	10 kHz
VBW	10kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is -30°C~75°C.

8.3DEVIATION FROM STANDARD

No deviation.

8.4TEST SETUP

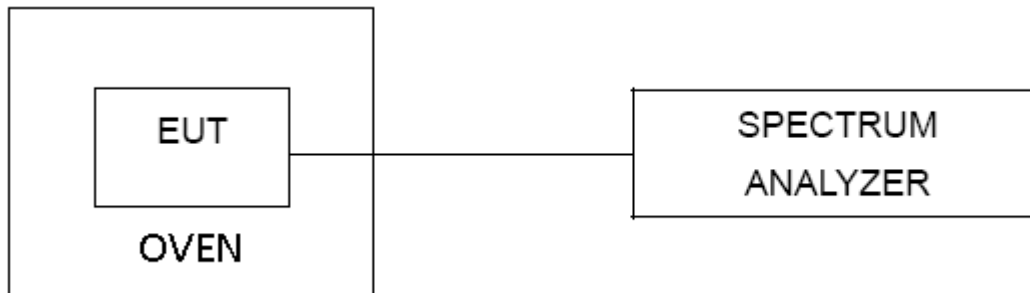

8.5EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.



8.6 TEST RESULTS

N/A.


9. MEASUREMENT INSTRUMENTS LIST

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2024/01/05	2025/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022/12.11	2024/12/10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022/12/11	2024/12/10
Preamplifier	Emtrace	RP01A	'02017	2024/01/05	2025/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2024/01/05	2025/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2024/01/05	2025/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2024/01/05	2025/01/04
RF Cable	/	LMR400UF-NMNM-7.0M	/	2024/01/05	2025/01/04
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2024/01/05	2025/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-102611-mk	2024/11/02	2025/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102915-Bp	2024/11/02	2025/11/01
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2024/01/05	2025/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2024/01/05	2025/01/04



10.EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos****Conducted RF Test Photos**

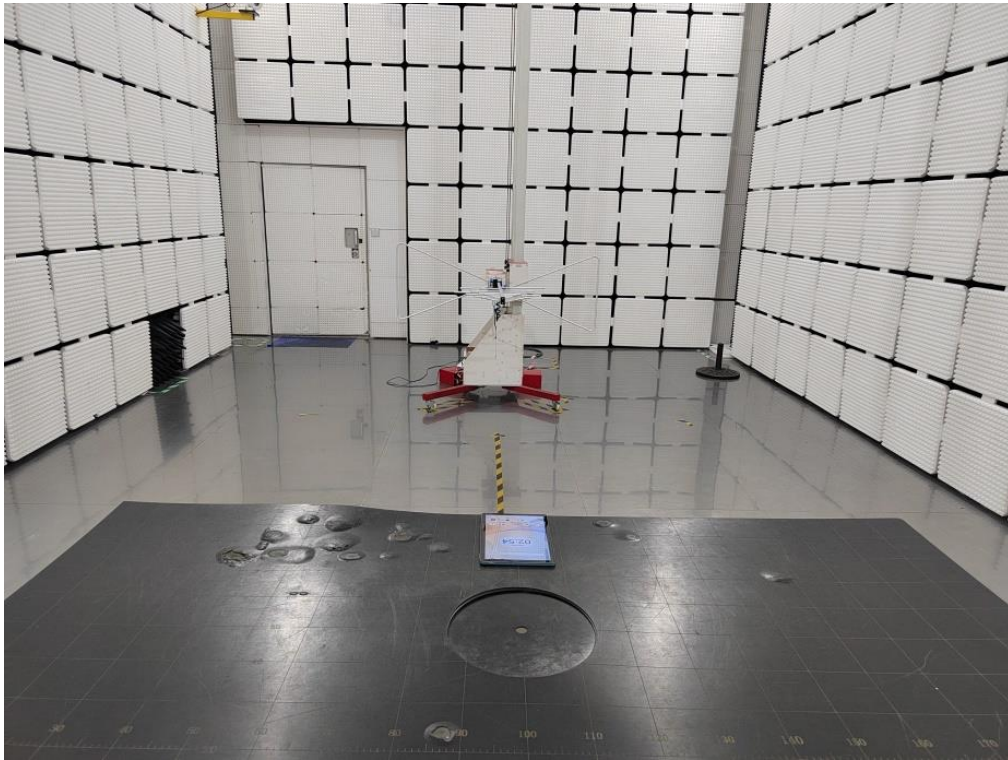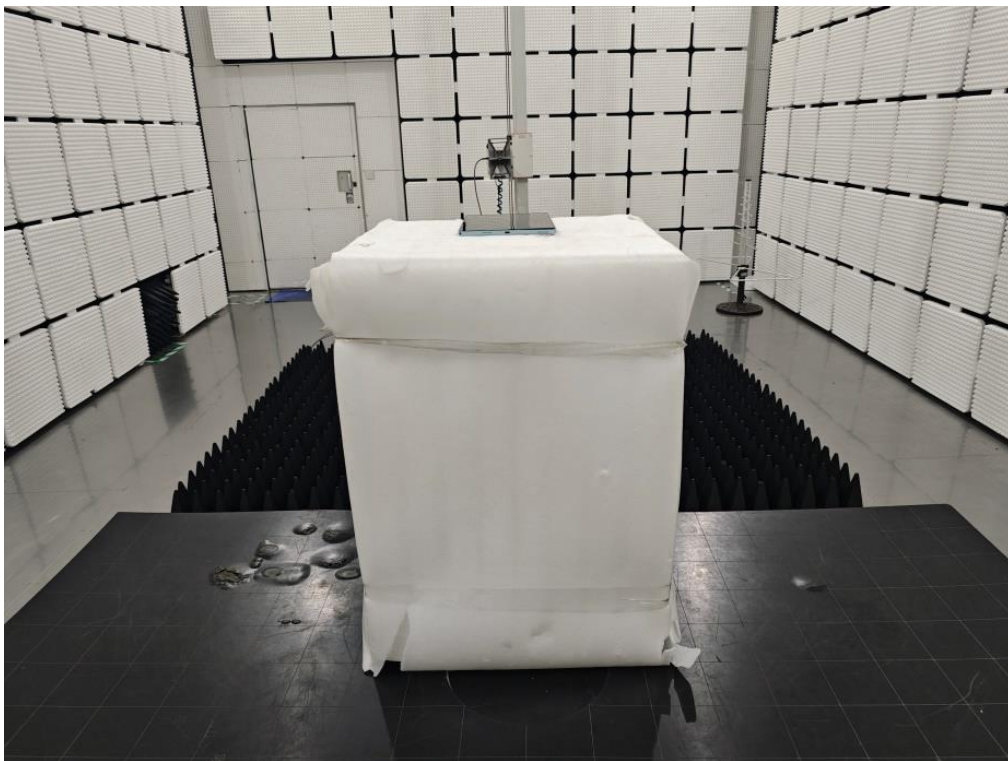Radiated Emissions Test Photos**30 MHz to 1 GHz****Radiated Emissions Test Photos****Above 1 GHz**



11.EUT PHOTOS


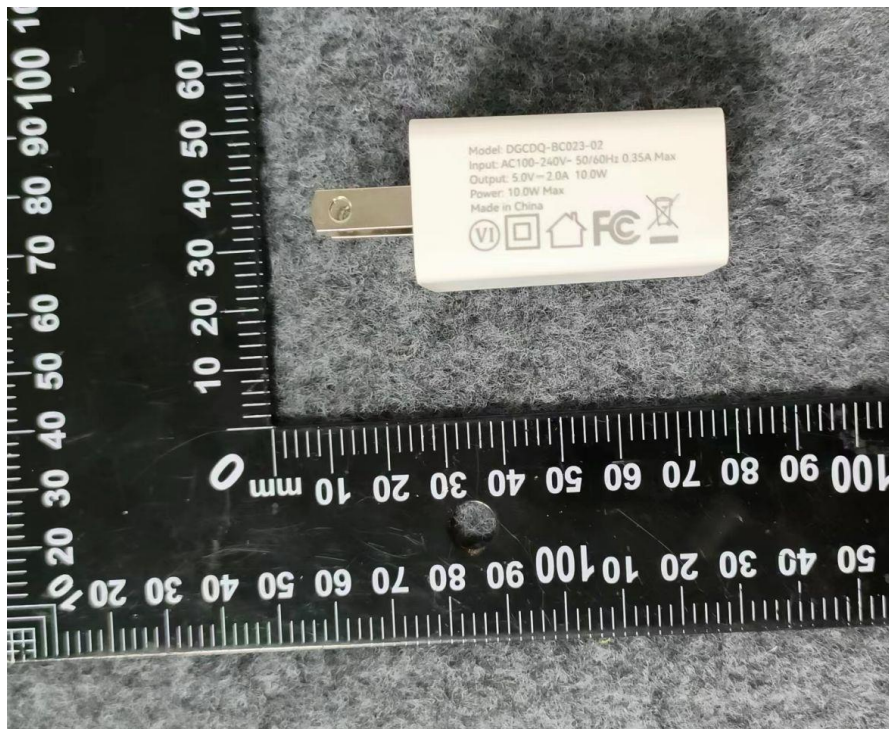






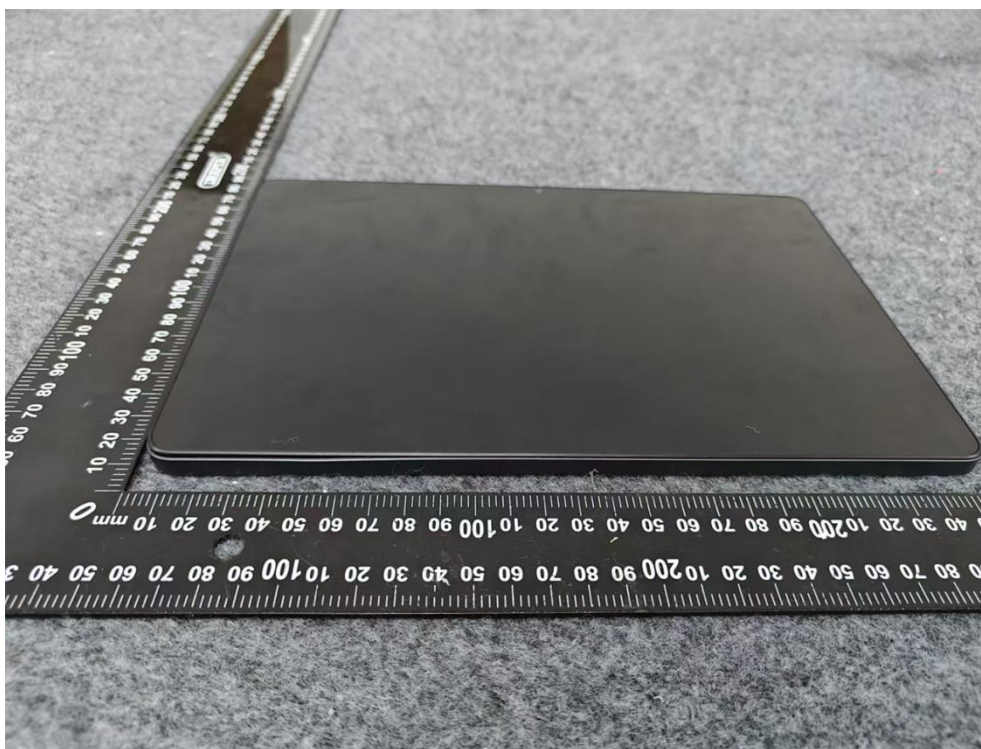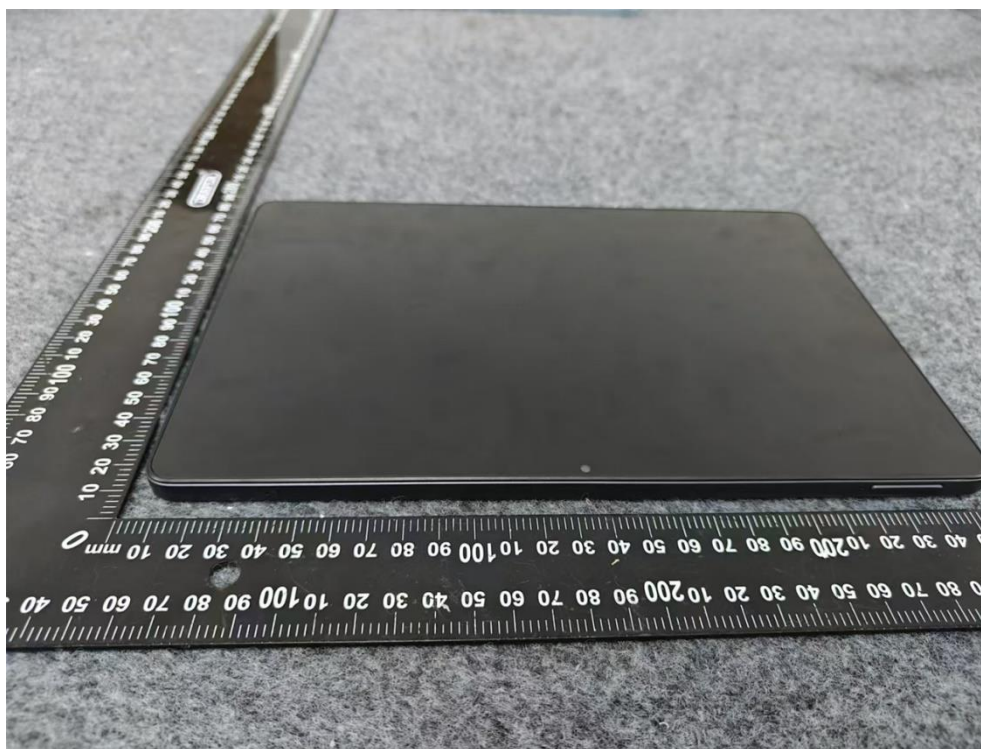



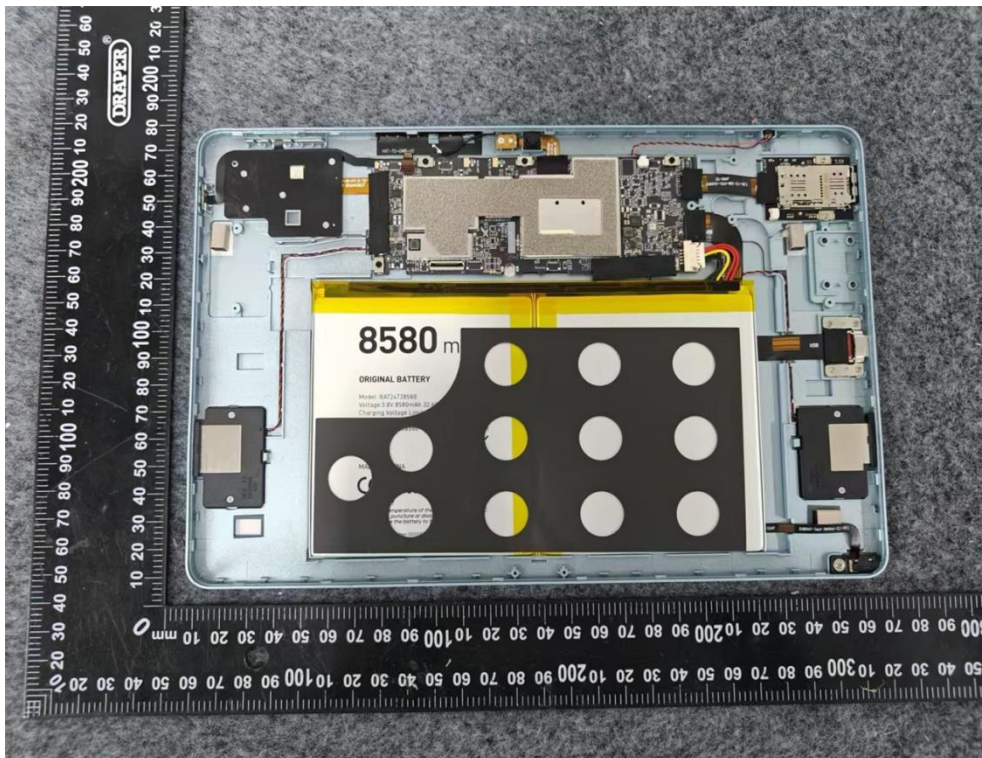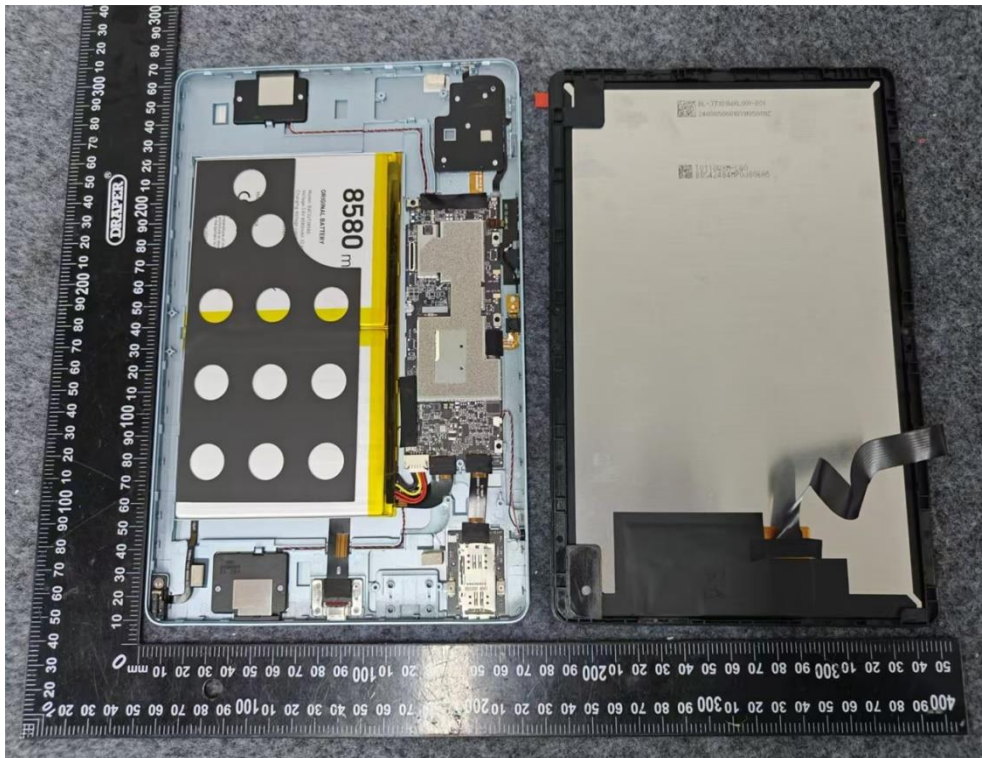

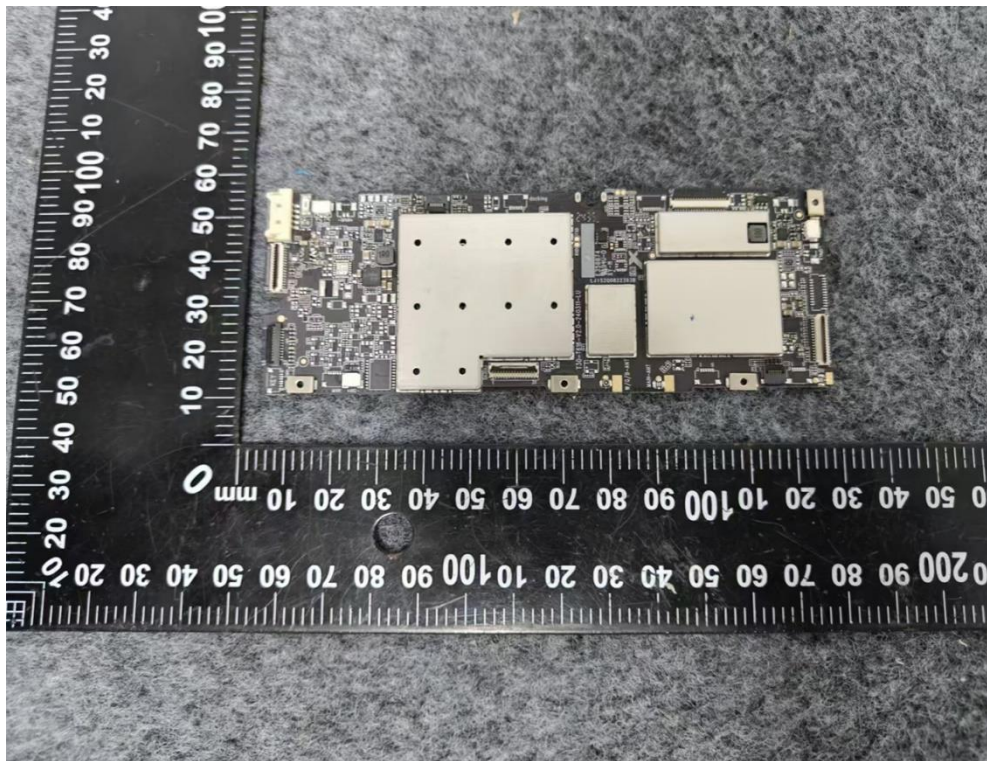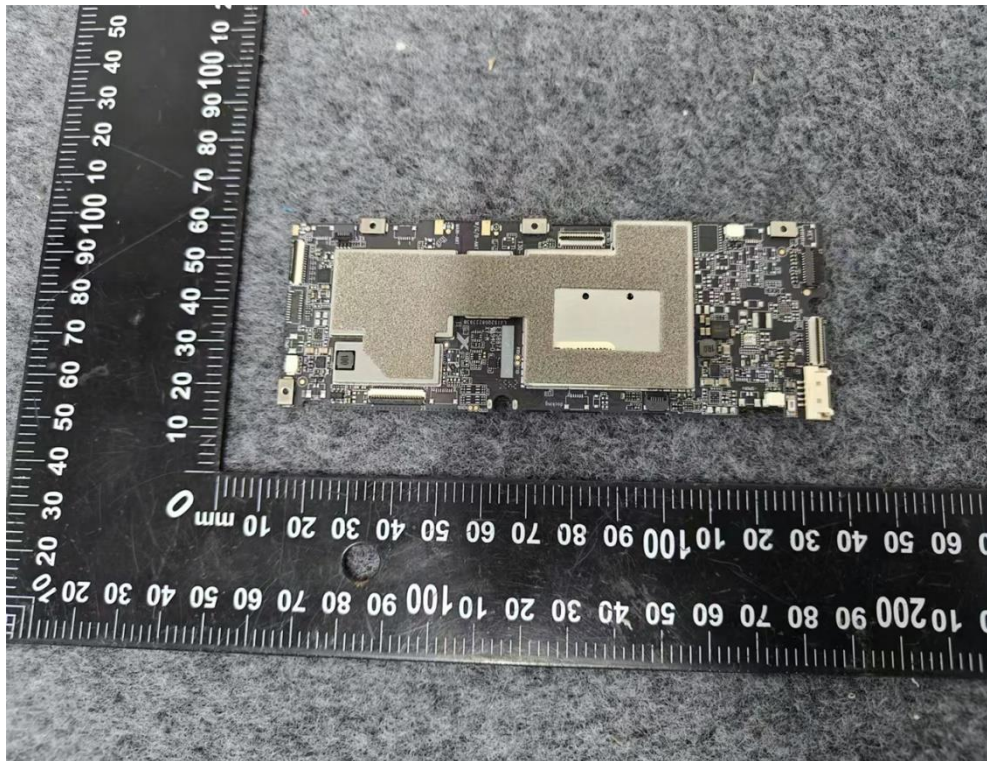


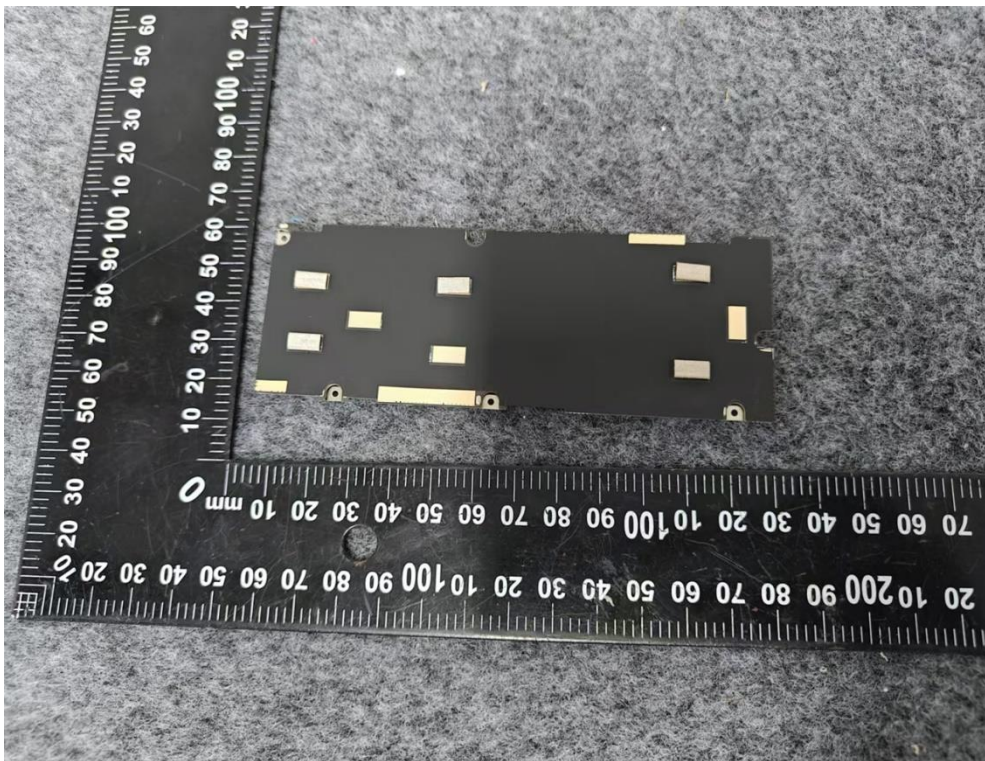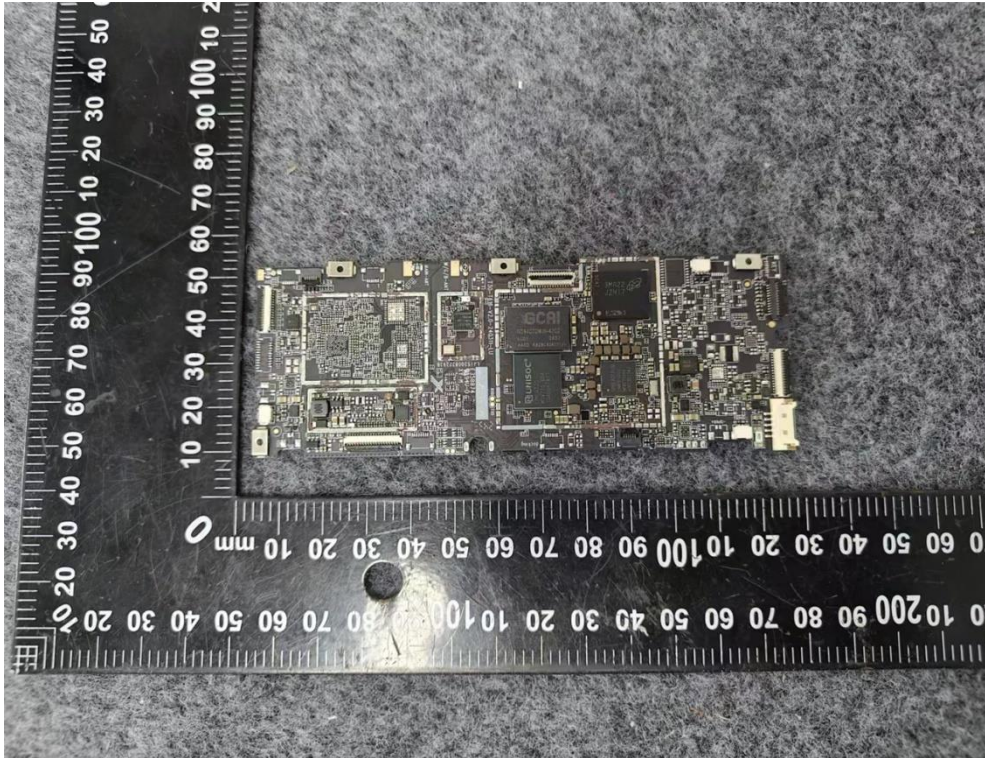



APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS


Test Mode	TX AC(VHT80) Mode Channel 155 (UNII-3)	Phase	Line
-----------	--	-------	------

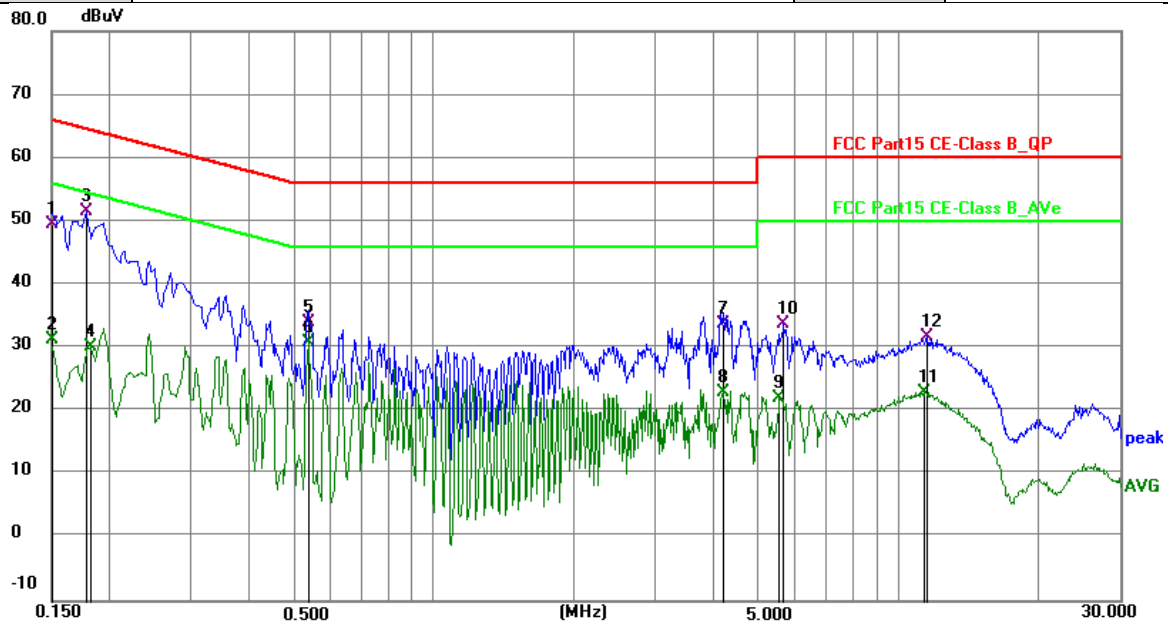

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode	TX AC(VHT80) Mode Channel 155 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

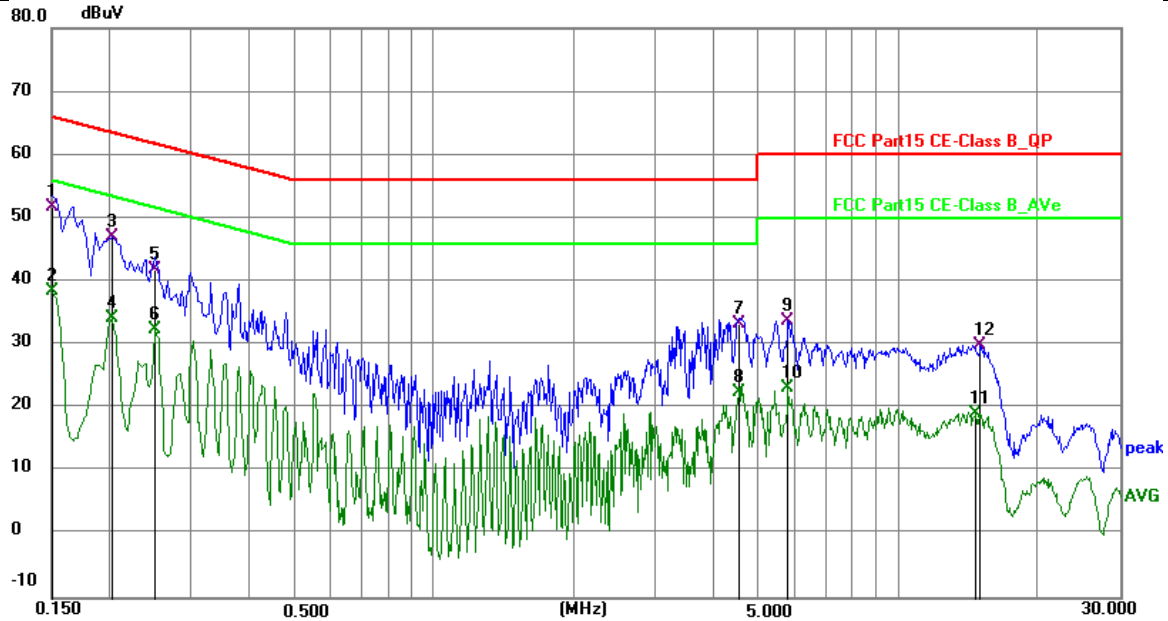

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1500	42.20	9.65	51.85	66.00	-14.15	QP	P	
2	0.1500	28.79	9.65	38.44	56.00	-17.56	AVG	P	
3	0.2020	37.43	9.63	47.06	63.53	-16.47	QP	P	
4	0.2020	24.61	9.63	34.24	53.53	-19.29	AVG	P	
5	0.2500	32.32	9.63	41.95	61.76	-19.81	QP	P	
6	0.2500	22.85	9.63	32.48	51.76	-19.28	AVG	P	
7	4.5380	23.14	10.06	33.20	56.00	-22.80	QP	P	
8	4.5380	12.56	10.06	22.62	46.00	-23.38	AVG	P	
9	5.7980	23.66	10.15	33.81	60.00	-26.19	QP	P	
10	5.7980	13.03	10.15	23.18	50.00	-26.82	AVG	P	
11	14.6780	9.00	10.25	19.25	50.00	-30.75	AVG	P	
12	15.0540	19.72	10.24	29.96	60.00	-30.04	QP	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC(VHT80) Mode Channel 155 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

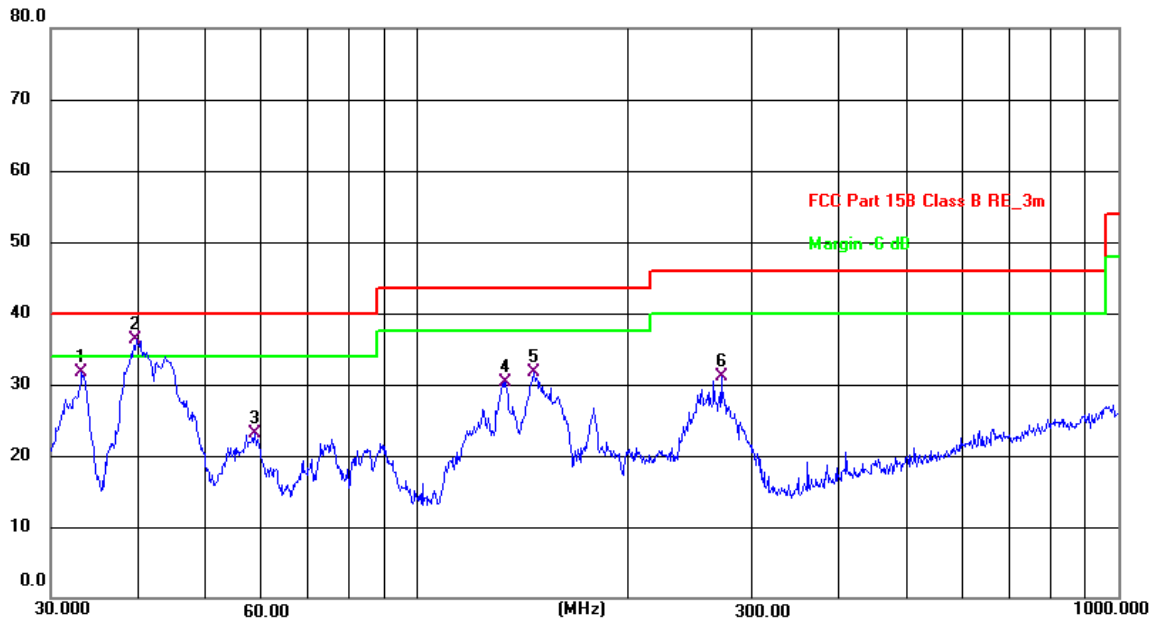


No.	Frequency (MHz)	Reading ()	Factor (dB)	Level ()	Limit ()	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.2112	50.99	-19.35	31.64	40.00	-8.36	QP	100	95	P	
2 *	39.7146	54.77	-18.39	36.38	40.00	-3.62	QP	100	76	P	
3	58.6126	41.93	-18.80	23.13	40.00	-16.87	QP	100	208	P	
4	133.6188	48.58	-18.21	30.37	43.50	-13.13	QP	100	9	P	
5	146.8877	49.24	-17.53	31.71	43.50	-11.79	QP	100	4	P	
6	271.3246	49.27	-18.18	31.09	46.00	-14.91	QP	100	355	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT80) Mode Channel 155 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

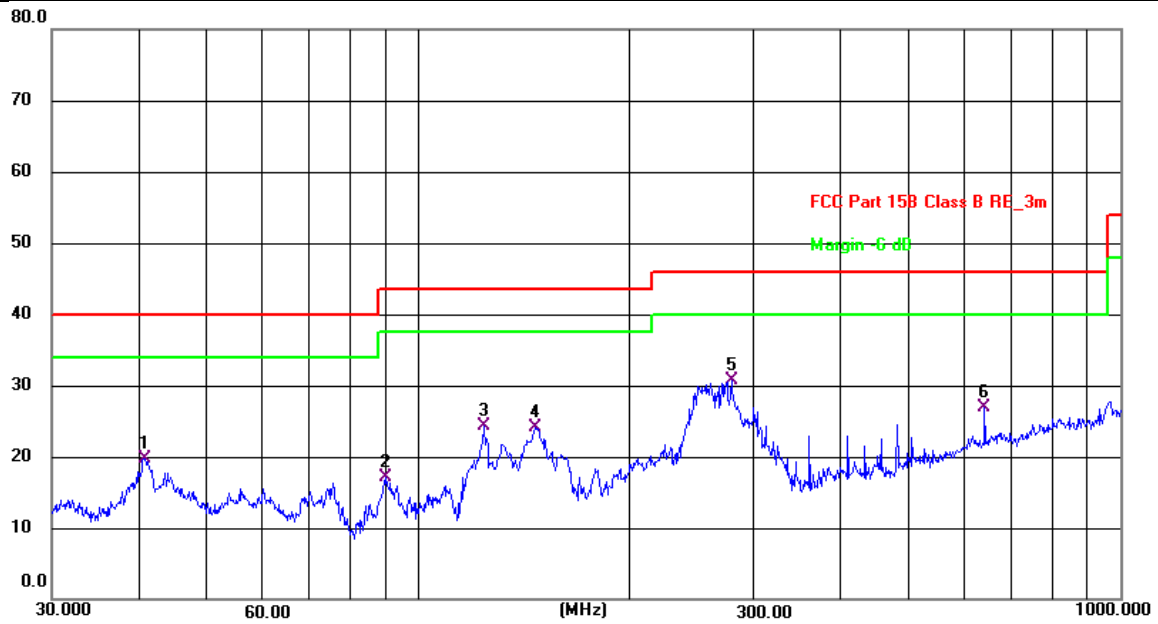

No.	Frequency (MHz)	Reading ()	Factor (dB)	Level ()	Limit ()	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.7016	38.14	-18.35	19.79	40.00	-20.21	QP	200	316	P	
2	89.9046	39.37	-22.36	17.01	43.50	-26.49	QP	200	353	P	
3	123.6984	43.18	-18.94	24.24	43.50	-19.26	QP	200	316	P	
4	146.3734	41.84	-17.65	24.19	43.50	-19.31	QP	200	272	P	
5 *	279.0436	48.60	-17.85	30.75	46.00	-15.25	QP	100	81	P	
6	640.6110	35.67	-8.85	26.82	46.00	-19.18	QP	200	353	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Result B1

TestMode	Antenna	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-40.63	≤ -27	PASS
		High	5240	-45.91	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-42.58	≤ -27	PASS
		High	5240	-45.71	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-37.69	≤ -27	PASS
		High	5230	-46.12	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-44.02	≤ -27	PASS
		High	5240	-45.79	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-38.19	≤ -27	PASS
		High	5230	-45.95	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-45.82	≤ -27	PASS

Test Result B4

TestMode	Antenna	ChName	Freq(MHz)	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5650-5700	-46.32	≤ -22.81	PASS
				5700-5720	-37.2	≤ -15.60	PASS
				5720-5725	-34.56	≤ -18.26	PASS
				5760-5650	-47.8	≤ -27	PASS
		High	5825	5850-5855	-38.95	≤ -26.95	PASS
				5855-5875	-38.42	≤ -10.21	PASS
				5875-5925	-44.65	≤ -21.69	PASS
				5925-5935	-45.4	≤ -27	PASS
11N20SISO	Ant1	Low	5745	5650-5700	-45.7	≤ -3.34	PASS
				5700-5720	-42.84	≤ -15.60	PASS
				5720-5725	-40.7	≤ -27.00	PASS
				5760-5650	-47.02	≤ -27	PASS
		High	5825	5850-5855	-40.8	≤ -16.69	PASS
				5855-5875	-43.38	≤ -11.53	PASS
				5875-5925	-44.42	≤ -21.69	PASS
				5925-5935	-46.4	≤ -27	PASS
11N40SISO	Ant1	Low	5755	5650-5700	-44.53	≤ -9.98	PASS
				5700-5720	-32.62	≤ -15.36	PASS
				5720-5725	-31.1	≤ -22.59	PASS
				5780-5650	-48.05	≤ -27	PASS
		High	5795	5850-5855	-38.16	≤ -19.67	PASS
				5855-5875	-43.62	≤ -10.77	PASS
				5875-5925	-45.18	≤ -12.15	PASS
				5925-5935	-47.12	≤ -27	PASS
11AC20SISO	Ant1	Low	5745	5650-5700	-45.61	≤ -8.89	PASS
				5700-5720	-43.19	≤ -15.41	PASS
				5720-5725	-38.62	≤ -25.48	PASS
				5760-5650	-47.93	≤ -27	PASS
		High	5825	5850-5855	-40.82	≤ -17.58	PASS
				5855-5875	-43.72	≤ -12.19	PASS
				5875-5925	-43.86	≤ -8.57	PASS
				5925-5935	-46.18	≤ -27	PASS
11AC40SISO	Ant1	Low	5755	5650-5700	-45.46	≤ -7.52	PASS
				5700-5720	-37.06	≤ -15.36	PASS
				5720-5725	-35.81	≤ -23.04	PASS
				5780-5650	-47.82	≤ -27	PASS
		High	5795	5850-5855	-42.95	≤ -16.39	PASS

11AC80 SISO	Ant1	Low	5775	5855-5875	-43.69	≤ 15.06	PASS
				5875-5925	-45.48	≤ -4.72	PASS
				5925-5935	-47.33	≤ -27	PASS
				5650-5700	-39.4	≤ 8.03	PASS
				5700-5720	-34.16	≤ 15.04	PASS
				5720-5725	-35.33	≤ 15.67	PASS
		High	5775	5800-5650	-47.1	≤ -27	PASS
				5850-5855	-39.14	≤ 26.62	PASS
				5855-5875	-34.28	≤ 11.45	PASS
				5875-5925	-38.11	≤ -26.45	PASS
				5925-5935	-47.03	≤ -27	PASS