



## FCC Part 15, Subpart B, Class B

QIKCONNEX D/B/A HAE INNOVATIONS

Remote AC Relay

Test Model: LRSM0009C

Prepared for  
Address

: QIKCONNEX D/B/A HAE INNOVATIONS  
: 14 CULNEN DR LOWER LEVEL BRANCHBURG New Jersey 08876 United States

Prepared by  
Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.  
: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
: (+86)755-82591330  
: (+86)755-82591332  
: www.LCS-cert.com  
: webmaster@LCS-cert.com

Tel  
Fax  
Web  
Mail

Date of receipt of test sample : April 17, 2023  
Number of tested samples : 1  
Samples number : A041023090  
Date of Test : April 17, 2023 ~ May 30, 2023  
Date of Report : June 02, 2023



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



**FCC Part 15, Subpart B, Class B**  
**FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014**

**Report Reference No.** : LCSA041023090E

Date Of Issue ..... : June 02, 2023

**Testing Laboratory Name ....** : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address ..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure... : Full application of Harmonised standards  Partial application of Harmonised standards  Other standard testing method

**Applicant's Name** : **QIKCONNEX D/B/A HAE INNOVATIONS**

Address ..... : 14 CULNEN DR LOWER LEVEL BRANCHBURG New Jersey 08876 United States

**Test Specification**

Standard ..... : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No. : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.....** : **Remote AC Relay**

Test Model ..... : LRSM0009C

Trade Mark ..... : N/A

Ratings ..... : Please Refer to Page 7

**Result .....** : **Positive**

**Compiled by:**

*Cindy Nie*

**Supervised by:**

*Baron Wen*

**Approved by:**

*Gavin Liang*

Cindy Nie/ File administrators

Baron Wen/ Technique principal

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT****Test Report No. : LCSA041023090E****June 02, 2023**

Date of issue

Test Model ..... : LRSM0009C

EUT..... : Remote AC Relay

**Applicant..... : QIKCONNEX D/B/A HAE INNOVATIONS**

Address..... : 14 CULNEN DR LOWER LEVEL BRANCHBURG New Jersey 08876 United States

Telephone..... : /

Fax..... : /

**Manufacturer..... : MIOT**

Address..... : Room 2, No.153 north Youyi RD, Zhoushi town, Kunshan city, Jiangsu province, 215300, China.

Telephone..... : /

Fax..... : /

**Factory..... : MIOT**

Address..... : Room 2, No.153 north Youyi RD, Zhoushi town, Kunshan city, Jiangsu province, 215300, China.

Telephone..... : /

Fax..... : /

**Test Result** according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## Revision History

Revision	Issue Date	Revision content	Revised By
000	June 02, 2023	Initial Issue	/



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Support equipment List .....	7
2.3. Description of Test Facility .....	7
2.4. Statement of the Measurement Uncertainty .....	8
2.5. Measurement Uncertainty.....	8
<b>3. TEST RESULTS .....</b>	<b>9</b>
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT .....	9
3.2. Radiated emission Measurement .....	13
<b>4. TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>20</b>
<b>5. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>20</b>
<b>6. INTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>20</b>





## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	---	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	---	PASS
N/A is an abbreviation for Not Applicable.			

#### Test mode:

Mode	Working	Record



Shenzhen LCS Compliance Testing Laboratory Ltd.

Address: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Remote AC Relay

Trade Mark : N/A

Test Model : LRSM0009C

Power Supply : Input: 120V~, 10A, 60Hz

Highest internal frequency : 698.2MHZ-1914.8MHZ  
(Fx)

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 1.705 \text{ MHz}$	30 MHz
$1.705 \text{ MHz} < F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1000 \text{ MHz}$	5 GHz
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 40 GHz

### 2.2. Support equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--

### 2.3. Description of Test Facility

#### Site Description

EMC Lab. : NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U <sub>lab</sub> )	Expanded Uncertainty (U <sub>cispr</sub> )
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



### 3. TEST RESULTS


#### 3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

##### 3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102312	2023-02-25	2024-02-24
3	Artificial Mains	R&S	ENV216	101288	2022-06-16	2023-06-15
4	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2022-08-17	2023-08-16

##### 3.1.2. Block Diagram of Test Setup

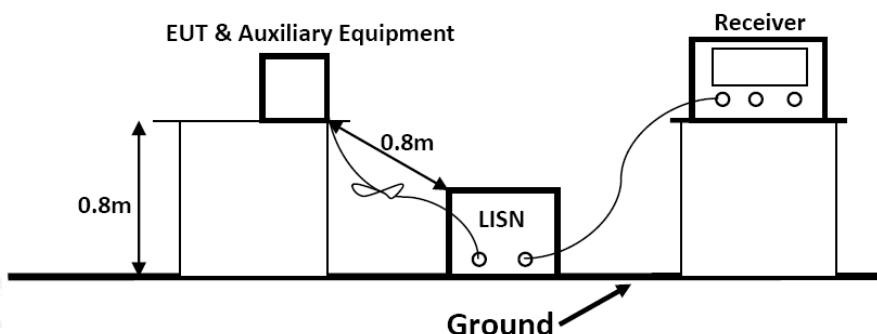

##### 3.1.3. Test Standard

###### Power Line Conducted Emission Limits

Frequency (MHz)			Limit (dB $\mu$ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

##### 3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 3.1.5.Operating Condition of EUT

3.1.5.1.Setup the EUT as shown on Section 3.1.2

3.1.5.2.Turn on the power of all equipments.

3.1.5.3.Let the EUT work in measuring Working and measure it.

### 3.1.6.Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

### 3.1.7.Test Results

**PASS.**

The test result please refer to the next page.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an


District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	LRSM0009C	Test Mode	Working
Environmental Conditions	23.6°C, 53.8% RH	Test Engineer	Paul Xie
Pol	Line	Test Voltage	AC 120V/60Hz

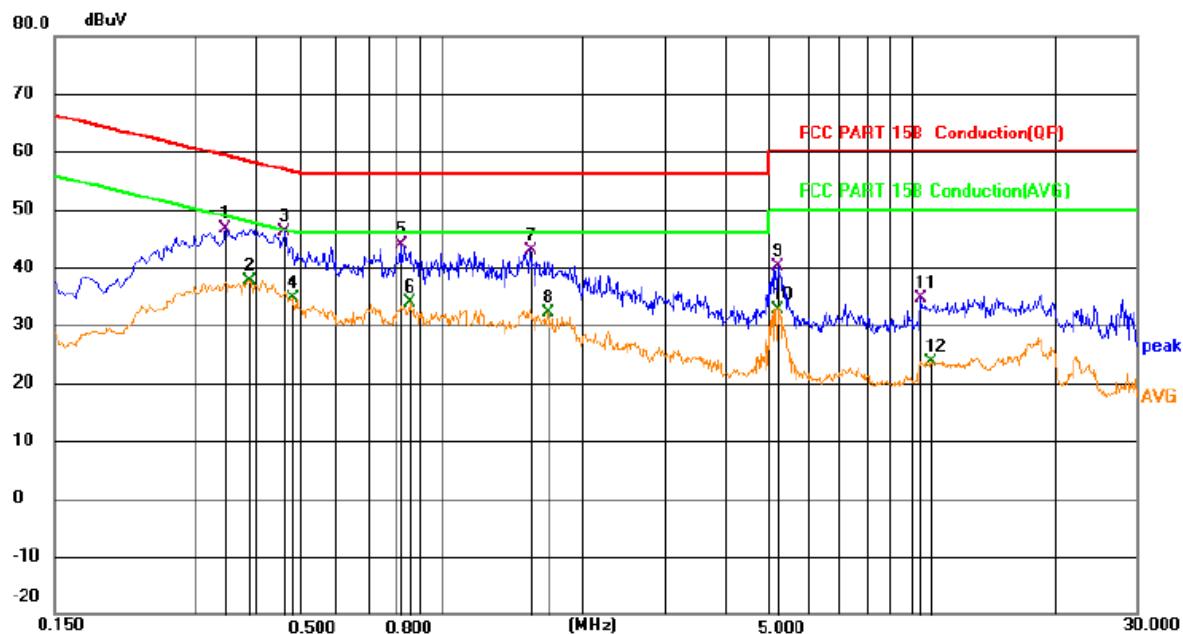


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
1		0.3481	27.03	19.63	46.66	59.01	-12.35	QP
2	*	0.3893	18.03	19.63	37.66	48.08	-10.42	AVG
3		0.4651	26.50	19.64	46.14	56.60	-10.46	QP
4		0.4837	14.92	19.64	34.56	46.28	-11.72	AVG
5		0.8206	24.33	19.64	43.97	56.00	-12.03	QP
6		0.8566	14.28	19.64	33.92	46.00	-12.08	AVG
7		1.5406	23.18	19.67	42.85	56.00	-13.15	QP
8		1.6756	12.39	19.67	32.06	46.00	-13.94	AVG
9		5.1721	20.33	19.70	40.03	60.00	-19.97	QP
10		5.2126	12.98	19.70	32.68	50.00	-17.32	AVG
11		10.4551	14.75	19.85	34.60	60.00	-25.40	QP
12		11.0086	3.80	19.85	23.65	50.00	-26.35	AVG





Test Model	LRSM0009C	Test Mode	Working
Environmental Conditions	23.6°C, 53.8% RH	Test Engineer	Paul Xie
Pol	Neutral	Test Voltage	AC 120V/60Hz

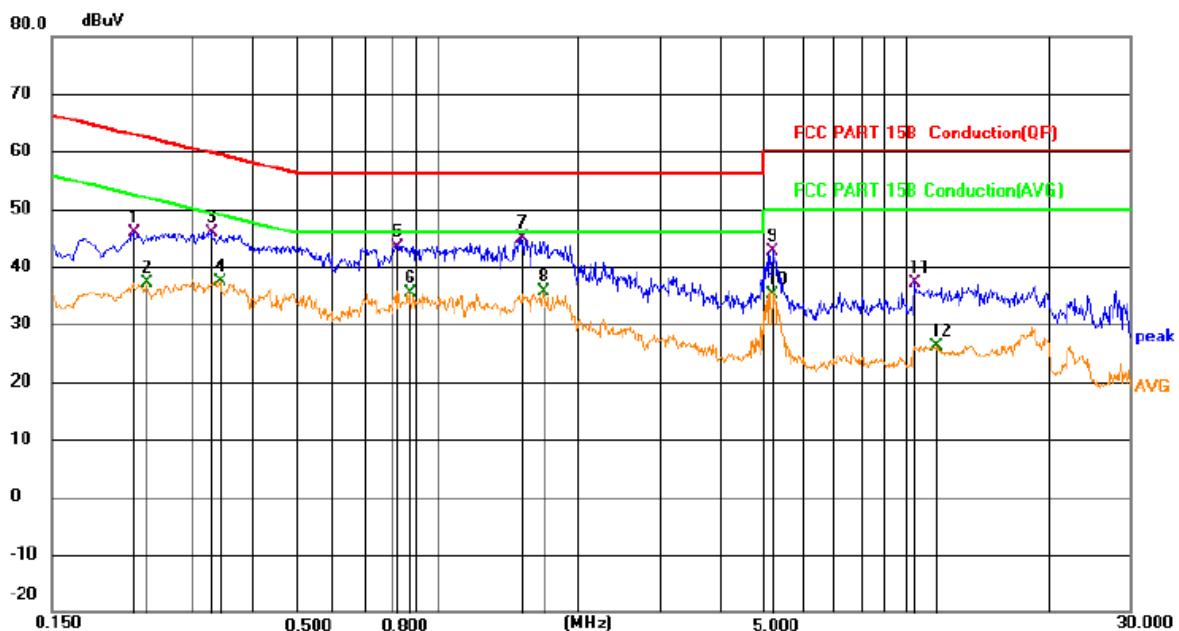

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
1		0.2244	26.33	19.63	45.96	62.65	-16.69	QP
2		0.2401	17.38	19.63	37.01	52.09	-15.08	AVG
3		0.3301	26.20	19.63	45.83	59.45	-13.62	QP
4		0.3436	17.74	19.63	37.37	49.12	-11.75	AVG
5		0.8206	23.83	19.64	43.47	56.00	-12.53	QP
6		0.8746	15.69	19.64	35.33	46.00	-10.67	AVG
7		1.5046	25.19	19.67	44.86	56.00	-11.14	QP
8 *		1.6756	15.89	19.67	35.56	46.00	-10.44	AVG
9		5.1721	22.83	19.70	42.53	60.00	-17.47	QP
10		5.2126	15.48	19.70	35.18	50.00	-14.82	AVG
11		10.4551	17.25	19.85	37.10	60.00	-22.90	QP
12		11.6161	6.34	19.84	26.18	50.00	-23.82	AVG

Note: Pre-Scan all mode, Thus record worse case mode result in this report.




## 3.2. Radiated emission Measurement

### 3.2.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	N/A	N/A
2	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2021-09-12	2024-09-11
3	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
4	EMI Test Receiver	R&S	ESR3	102311	2022-08-17	2023-08-16
5	Broadband Preamplifier	/	BP-01M18G	P190501	2022-06-16	2023-06-15
6	EMI Test Software	Farad	EZ	/	N/A	N/A
7	MXA Signal Analyzer	Agilent	N9020A	MY53290398	2022-06-16	2023-06-15
8	EMI Test Receiver	R&S	ESPI	101940	2022-08-18	2023-08-17

### 3.2.2. Block Diagram of Test Setup

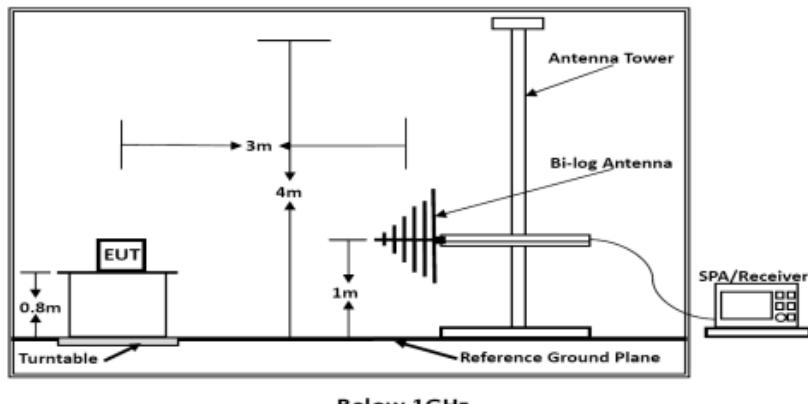

Below 1GHz

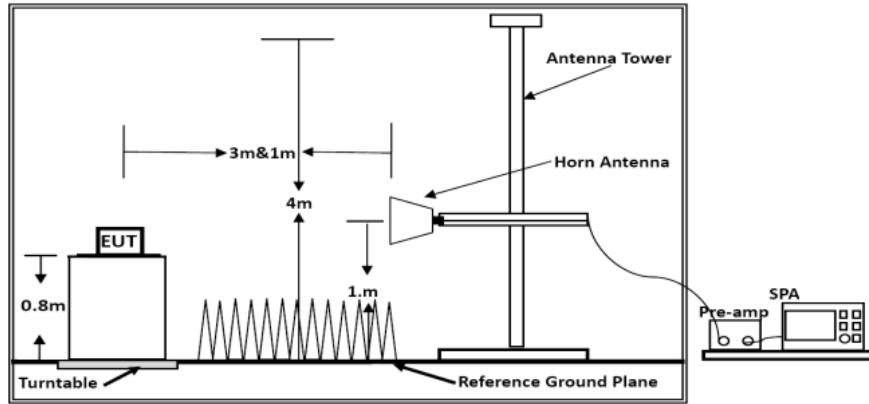

Above 1GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Address: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

### 3.2.3. Radiated Emission Limit

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu$ V/m	dB( $\mu$ V)/m
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m  
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
Above 1000	3	74	54

\*\*\*Note: The lower limit applies at the transition frequency.

### 3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Working and measure it.

### 3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 3.2.7. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

The frequency range from 30MHz to 1000MHz and above 1000MHz is checked.


### 3.2.8. Radiated Emission Noise Measurement Result

**PASS.**

The scanning waveforms please refer to the next page.



<b>Test Model</b>	LRSM0009C	<b>Test Mode</b>	Working
<b>Environmental Conditions</b>	22.3°C, 53.3% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Vertical	<b>Distance</b>	3m
<b>Test Engineer</b>	Paul Xie	<b>Test Voltage</b>	AC 120V/60Hz

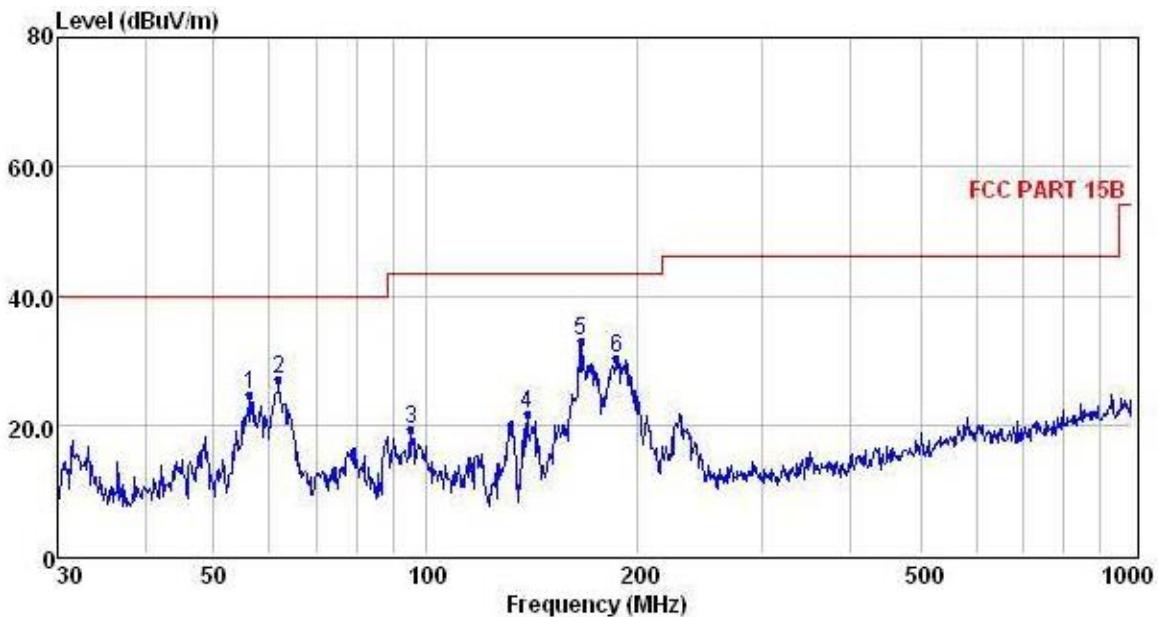


Freq	Reading	CabLoss	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1	56.20	11.53	0.63	12.54	24.70	40.00	-15.30	QP
2	61.78	14.45	0.66	12.06	27.17	40.00	-12.83	QP
3	95.43	8.48	0.79	10.17	19.44	43.50	-24.06	QP
4	139.36	12.11	0.99	8.56	21.66	43.50	-21.84	QP
5	166.07	22.48	1.09	9.51	33.08	43.50	-10.42	QP
6	186.44	18.91	1.16	10.13	30.20	43.50	-13.30	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that are 20db below the official limit are not reported



<b>Test Model</b>	LRSM0009C	<b>Test Mode</b>	Working
<b>Environmental Conditions</b>	22.3°C, 53.3% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Horizontal	<b>Distance</b>	3m
<b>Test Engineer</b>	Paul Xie	<b>Test Voltage</b>	AC 120V/60Hz

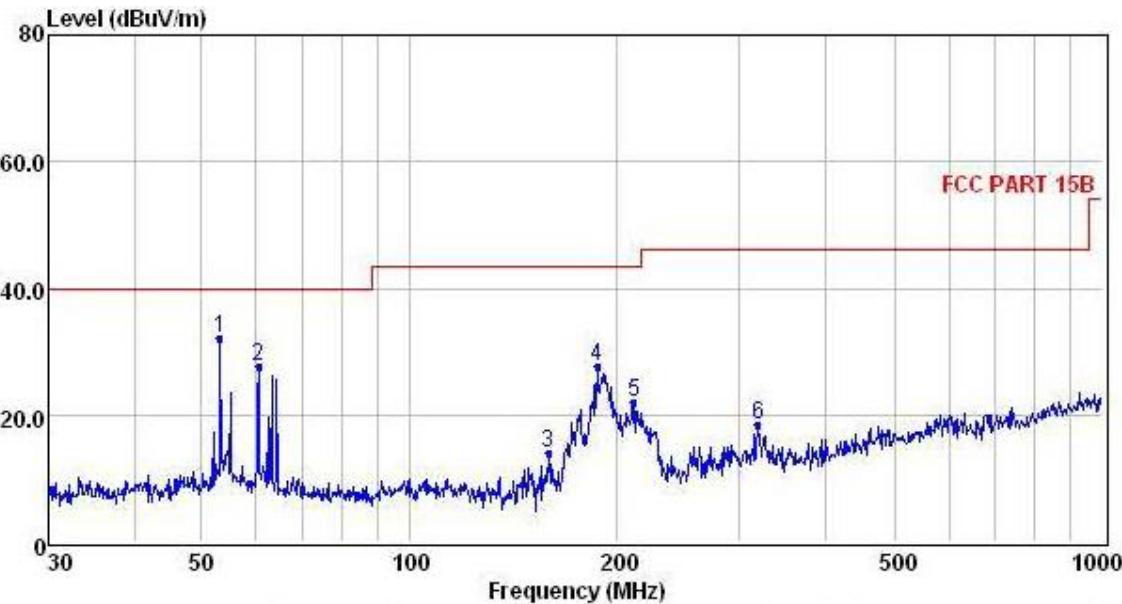


Freq	Reading	CabLoss	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	dBuV/m
1	53.13	19.04	0.62	12.57	32.23	40.00	-7.77	QP
2	60.49	14.53	0.65	12.38	27.56	40.00	-12.44	QP
3	158.67	3.90	1.07	9.14	14.11	43.50	-29.39	QP
4	187.10	16.33	1.16	10.16	27.65	43.50	-15.85	QP
5	211.53	9.54	1.22	11.32	22.08	43.50	-21.42	QP
6	319.94	3.62	1.34	13.54	18.50	46.00	-27.50	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that are 20db below the official limit are not reported



<b>Test Model</b>	LRSM0009C	<b>Test Mode</b>	Working
<b>Environmental Conditions</b>	23.9°C, 52.0% RH	<b>Detector Function</b>	Peak+AV
<b>Pol</b>	Vertical	<b>Distance</b>	3m
<b>Test Engineer</b>	Paul Xie	<b>Test Voltage</b>	AC 120V/60Hz

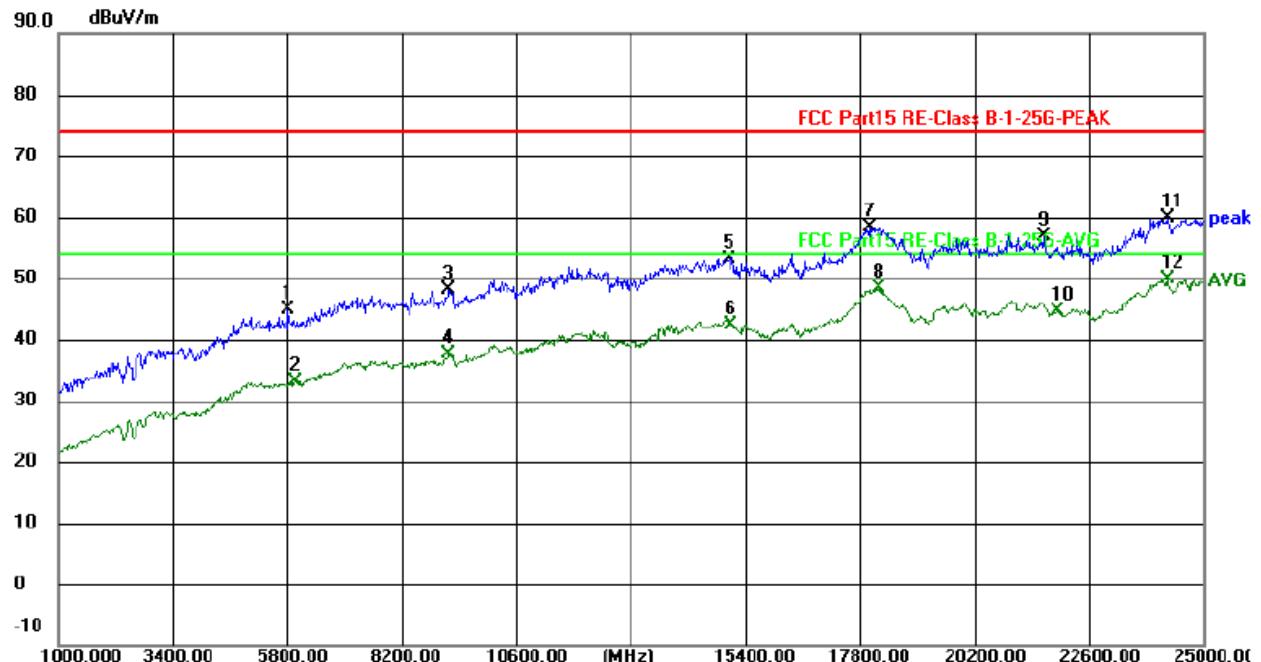


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5824.000	48.46	-3.52	44.94	74.00	-29.06	peak	P	
2	5968.000	36.79	-3.66	33.13	54.00	-20.87	AVG	P	
3	9184.000	45.82	2.19	48.01	74.00	-25.99	peak	P	
4	9184.000	35.44	2.19	37.63	54.00	-16.37	AVG	P	
5	15064.000	43.38	9.83	53.21	74.00	-20.79	peak	P	
6	15088.000	32.68	9.76	42.44	54.00	-11.56	AVG	P	
7	17992.000	40.70	17.61	58.31	74.00	-15.69	peak	P	
8	18184.000	37.86	10.52	48.38	54.00	-5.62	AVG	P	
9	21640.000	44.85	12.11	56.96	74.00	-17.04	peak	P	
10	21928.000	32.47	12.14	44.61	54.00	-9.39	AVG	P	
11	24232.000	46.42	13.34	59.76	74.00	-14.24	peak	P	
12	24232.000	36.61	13.34	49.95	54.00	-4.05	AVG	P	





Test Model	LRSM0009C	Test Mode	Working
Environmental Conditions	23.9°C, 52.0% RH	Detector Function	Peak+AV
Pol	Horizontal	Distance	3m
Test Engineer	Paul Xie	Test Voltage	AC 120V/60Hz

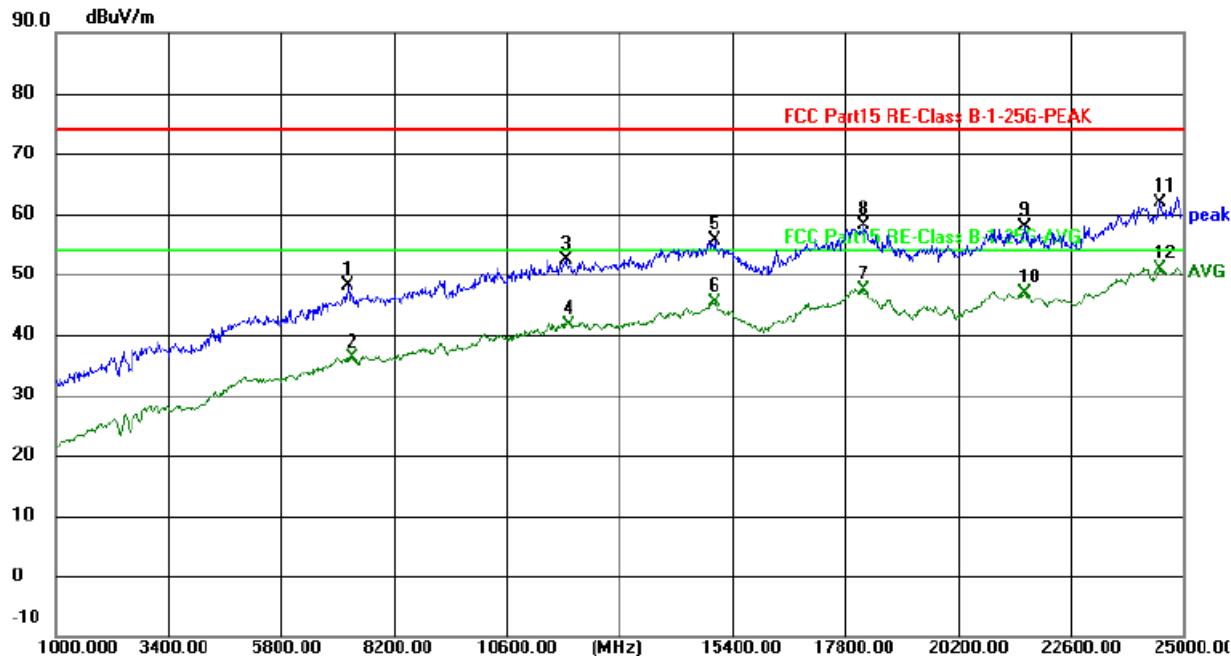

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	7216.000	47.90	0.16	48.06	74.00	-25.94	peak	P	
2	7312.000	35.89	0.32	36.21	54.00	-17.79	AVG	P	
3	11848.000	45.84	6.48	52.32	74.00	-21.68	peak	P	
4	11920.000	35.16	6.57	41.73	54.00	-12.27	AVG	P	
5	15016.000	45.75	9.96	55.71	74.00	-18.29	peak	P	
6	15016.000	35.30	9.96	45.26	54.00	-8.74	AVG	P	
7	18184.000	36.87	10.52	47.39	54.00	-6.61	AVG	P	
8	18208.000	47.51	10.53	58.04	74.00	-15.96	peak	P	
9	21616.000	45.77	12.10	57.87	74.00	-16.13	peak	P	
10	21616.000	34.85	12.10	46.95	54.00	-7.05	AVG	P	
11	24496.000	48.32	13.45	61.77	74.00	-12.23	peak	P	
12	24496.000	37.44	13.45	50.89	54.00	-3.11	AVG	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 5. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity