



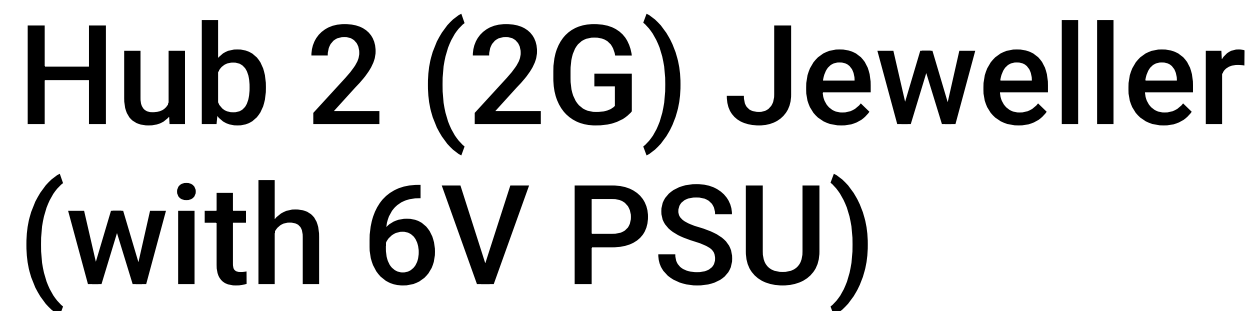

xxx – digits from 0 to 9 indicate the device modification.

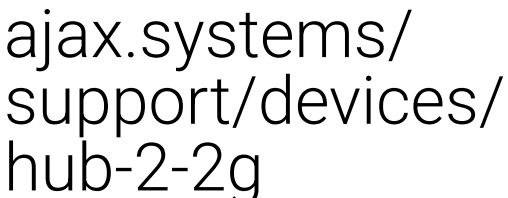

Recomendamos vivamente que consulte o Manual do Utilizador presente no sítio Web antes de utilizar o dispositivo.

Hub 2 (2G) Jeweller (with 6V PSU) is a security control panel with alarm photo verification support.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not

Kit complet: 1. Hub 2 (2G) Jeweller (with 6V PSU); 2. Panneau de montage SmartBracket; 3. Kit d'installation; 4. Carte SIM (selon la région de vente); 5. Guide de démarrage rapide.

	Hub 2 (2G) Jeweller (with 6V PSU) es panel de control de seguridad con soporte para la verificación fotográfica de alarmas.
Banda de frecuencia	905–926,5 MHz FHSS (cumple con la sección 15 de las Normas de la FCC)
Densidad de potencia RF: – SRD technology: – GSM:	0.0005 mW/cm ² (limit 0.60 mW/cm ²) 0.1 mW/cm ² (limit 1.0 mW/cm ²)
Voltaje de entrada	4.2–10 V ⁼⁼⁼
Corriente de entrada máx	2.2 A a 4.2 V ⁼⁼⁼ 0.8 A a 10 V ⁼⁼⁼

Fabricante: «AS Manufacturing» LLC.
Dirección: c/Sklyarenko 5, Kyiv, 04073, Ucrania.
www.ajax.systems/es