

FCC eCFR 47 PART 22H, 24E, 27L CERTIFICATION TEST REPORT FCC ID: 2AX5VHUBPNA1AUX

Product: Security control panel

Trade Mark: AJAX

Model No.: HBP.J-000-NA/AUX

Family Model: HBP.J-001-NA/AUX

Report No.: S25021903007003

Issue Date: May 26, 2025

Prepared for

AJAX SYSTEMS CYPRUS HOLDINGS LTD

Ifigeneias, 17, Strovolos, 2007, Nicosia, Cyprus

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan
District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-2320 0050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : AJAX SYSTEMS CYPRUS HOLDINGS LTD

Address..... : Ifigeneias, 17, Strovolos, 2007, Nicosia, Cyprus

Manufacturer's Name..... : "AJAX SYSTEMS MANUFACTURING" LIMITED LIABILITY COMPANY

Address..... : Sklyarenka, 5, Kyiv, 04073, Ukraine

Factory (1)..... : "AJAX SYSTEMS MANUFACTURING" LIMITED LIABILITY COMPANY

Address..... : Sklyarenka, 5, Kyiv, 04073, Ukraine

Factory (2)..... : "AJAX TURKEY ELEKTRONİK TİCARET" ANONİM ŞİRKETİ

Address..... : Aydınlı Sb Mah. 4.Sk. Desbaş 6 Blok No: 4 İc Kapi No: Z01 Tuzla / İstanbul

Product name..... : Security control panel

Model and/or type reference .. : HBP.J-000-NA/AUX

Family Model..... : HBP.J-001-NA/AUX

Test Sample Number : S250219030007

Date of Test..... : Feb. 20, 2025 ~ May 26, 2025

Standards..... : FCC eCFR 47 Part 22H, Part 24E, Part 27L

Test procedure ANSI C63.26:2015

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Prepared : Gavan Zhang
By : Gavan Zhang
(Project Engineer)

Reviewed : Aaron Cheng
By : Aaron Cheng
(Supervisor)

Approved : Alex Li
By : Alex Li
(Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION.....	7
2.2 EUT EXERCISE	7
2.3 CONFIGURATION OF EUT SYSTEM.....	7
2.4 TEST SETUP	8
3.TEST AND MEASUREMENT EQUIPMENT	9
4. OUTPUT POWER.....	11
4.1 OUTPUT POWER MEASUREMENT	11
6. BANDEDGE AND EMISSION MASK.....	14
7. OUT OF BAND EMISSIONS	16
7.1 MEASUREMENT METHOD	16
8. RADIATED MEASUREMENT	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 LTE BAND 2.....	18
8.3 LTE BAND 4.....	22
8.4 LTE BAND 5.....	26
8.5 LTE BAND 7.....	28
8.6 LTE BAND 12	30

9. SPURIOUS RADIATION EMISSION	32
9.1 LTE BAND 2.....	34
9.2 LTE BAND 4.....	36
9.3 LTE BAND 5.....	38
9.4 LTE BAND 7.....	40
9.5 LTE BAND 12	42
10. FREQUENCY STABILITY	44
10.1 LTE BAND 2	45
10.2 LTE BAND 4	47
10.3 LTE BAND 5	49
10.4 LTE BAND 7	51
10.5 LTE BAND 12	53
11. PEAK-TO-AVERAGE RATIO.....	55
11.1 Description of the PAR Measurement.....	55
11.2 Measuring Instruments	55
11.3 Test Procedures.....	55
11.4 Test Setup.....	56

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Security control panel
Trade Mark	AJAX
Model Name	HBP.J-000-NA/AUX
Family Model	HBP.J-001-NA/AUX
Model Difference	All models are the same circuit and RF module, while additional models are supposed to be sold without casing.
FCC ID:	2AX5VHUBPNA1AUX
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2,4,5,7,12
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz;
Type of Modulation:	QPSK/16QAM/64QAM(Only Downlink)
Power Class	Class 3
Antenna:	Antenna 1: Planar_Multiband Antenna Antenna 2: External Antenna
Antenna gain:	Antenna 1 : -0.55dBi Antenna 2 : 0dBi
Adapter	N/A
Battery	N/A
Power Rating	DC 12V Main input 4.2V-16V DC (MAX 2A) Back-up 4.2V-16V DC (MAX 2A)
Extreme Vol. Limits:	DC 4.2V to DC 16V (Nominal DC 12V) (Note 1)
HW Version	HB2.009.MBR.001v4
FW Version	NA
SW Version	x.xx
** Note1: The High Voltage 16V and Low Voltage 4.2V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AX5VHUBPNA1AUX** filing to comply with the FCC Part 22H&24E&27L.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, Part 22H, Part 24E, Part 27L, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2/4/5/7/12

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Security control panel	HBP.J-000-NA/AUX	FCC ID: 2AX5VHUBPNA1AUX	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

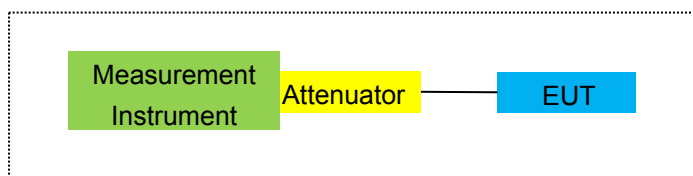

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

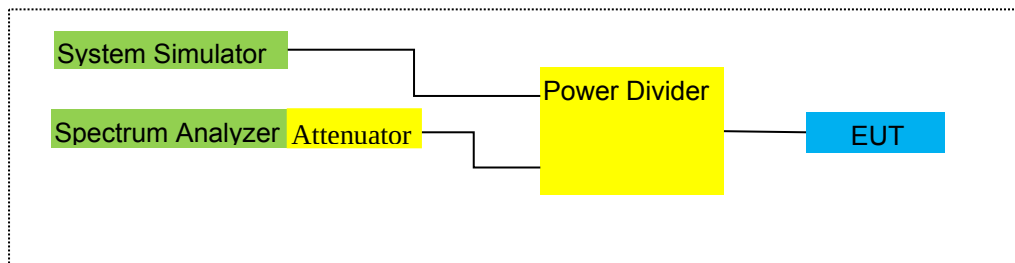

For Frequency Stability

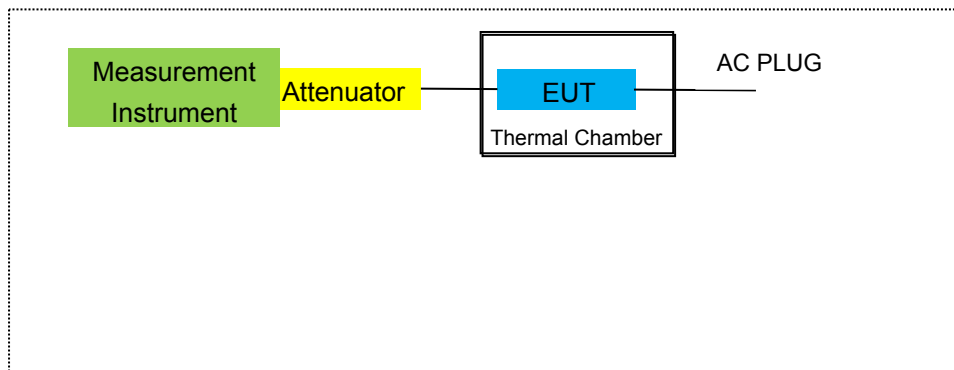

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2025.04.17	2026.04.16	1 year
2	Test Receiver	R&S	ESPI	101318	2025.04.17	2026.04.16	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12 2025.05.11	2025.05.11 2026.05.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9120 D	2816	2024.05.18	2027.05.17	3 year
6	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9120 D	2817	2024.05.12	2027.05.11	3 year
7	Amplifier	EM	EM-30180	060538	2025.04.25	2026.04.24	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2025.03.11	2026.03.10	1 year
9	Power Meter	R&S	NRVS	100696	2025.04.25	2026.04.24	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2025.04.25	2026.04.24	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2025.04.16	2026.04.15	1 year
15	LISN	R&S	ENV216	101313	2025.04.16	2026.04.15	1 year
16	LISN	EMCO	3816/2	00042990	2025.04.25	2026.04.24	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2025.03.11	2026.03.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2025.03.11	2026.03.10	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Spectrum Analyzer	agilent	e4440a	MY41000130	2025.04.24	2026.04.23	1 year
23	test receiver	R&S	ESCI	a0304218	2025.03.11	2026.03.10	1 year
24	Communication Tester	R&S	CMU200	A0304247	2025.03.11	2026.03.10	1 year

25	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2025.03.11	2026.03.10	1 year
26	DC Power Source	N/A	PS-6005D	20170402923	2024.04.25	2027.04.24	3 year
27	Log-Periodic Antenna	SCHWARZBEC K	VULB 9162	584	2025.04.19	2026.04.18	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8200	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".³

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

Band 2/4/5/7/12

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

(c)(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

Band 2/4/5/7/12

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

1. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.
2. The Band 7 emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

Band 2/4/5/7/12

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50

LIMITS:

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

24.232(c) The maximum output power of the transmitter for mobile and portable stations are limited to 2 watts EIRP.

TEST PROCEDURE

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

Band 2/4/5/7/12

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP	Max. EIRP Average (mW)	Polarization Of Max. ERP	
						Average (dBm)			
1.4MHz Band QPSK	1/#Mid	1850.7	-1.77	3.76	28.24	22.71	186.638	Horizontal	Pass
		1880	-1.01	3.91	28.22	23.30	213.796	Horizontal	Pass
		1909.3	-1.00	3.93	28.20	23.27	212.324	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-1.42	3.77	28.23	23.04	201.372	Horizontal	Pass
		1880	-1.08	3.91	28.24	23.25	211.349	Horizontal	Pass
		1908.5	-1.23	3.94	28.25	23.08	203.236	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-1.46	3.77	28.31	23.08	203.236	Horizontal	Pass
		1880	-1.09	3.91	28.22	23.22	209.894	Horizontal	Pass
		1907.5	-1.04	3.94	28.20	23.22	209.894	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-1.30	3.79	28.33	23.24	210.863	Horizontal	Pass
		1880	-0.82	3.95	28.22	23.45	221.309	Horizontal	Pass
		1905	-0.88	3.97	28.19	23.34	215.774	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-1.55	3.79	28.34	23.00	199.526	Horizontal	Pass
		1880	-0.60	3.95	28.22	23.67	232.809	Horizontal	Pass
		1902.5	-0.74	3.97	28.18	23.47	222.331	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-1.31	3.81	28.35	23.23	210.378	Horizontal	Pass
		1880	-0.83	3.96	28.22	23.43	220.293	Horizontal	Pass
		1900	-0.48	4.00	28.16	23.68	233.346	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-2.14	3.76	28.24	22.34	171.396	Vertical	Pass
		1880	-1.36	3.91	28.22	22.95	197.242	Vertical	Pass
		1909.3	-1.71	3.93	28.20	22.56	180.302	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-2.34	3.77	28.23	22.12	162.930	Vertical	Pass
		1880	-2.12	3.91	28.24	22.21	166.341	Vertical	Pass
		1908.5	-1.59	3.94	28.25	22.72	187.068	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.52	3.77	28.31	22.02	159.221	Vertical	Pass
		1880	-1.96	3.91	28.22	22.35	171.791	Vertical	Pass
		1907.5	-1.96	3.94	28.20	22.30	169.824	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-1.98	3.79	28.33	22.56	180.302	Vertical	Pass
		1880	-1.51	3.95	28.22	22.76	188.799	Vertical	Pass
		1905	-1.66	3.97	28.19	22.56	180.302	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-2.48	3.79	28.34	22.07	161.065	Vertical	Pass
		1880	-2.07	3.95	28.22	22.20	165.959	Vertical	Pass
		1902.5	-1.80	3.97	28.18	22.41	174.181	Vertical	Pass

20.0MHz	1/#Mid	1860	-1.74	3.81	28.35	22.80	190.546	Vertical	Pass
Band		1880	-1.54	3.96	28.22	22.72	187.068	Vertical	Pass
QPSK		1900	-2.16	4.00	28.16	22.00	158.489	Vertical	Pass

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.22	3.76	28.24	22.26	168.267	Horizontal	Pass
		1880	-1.88	3.91	28.22	22.43	174.985	Horizontal	Pass
		1909.3	-2.16	3.93	28.20	22.11	162.555	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-2.62	3.77	28.23	21.84	152.757	Horizontal	Pass
		1880	-2.42	3.91	28.24	21.91	155.239	Horizontal	Pass
		1908.5	-2.47	3.94	28.25	21.84	152.757	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.82	3.77	28.31	21.72	148.594	Horizontal	Pass
		1880	-2.46	3.91	28.22	21.85	153.109	Horizontal	Pass
		1907.5	-2.46	3.94	28.20	21.80	151.356	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-2.27	3.79	28.33	22.27	168.655	Horizontal	Pass
		1880	-1.40	3.95	28.22	22.87	193.642	Horizontal	Pass
		1905	-2.19	3.97	28.19	22.03	159.588	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-2.67	3.79	28.34	21.88	154.170	Horizontal	Pass
		1880	-2.35	3.95	28.22	21.92	155.597	Horizontal	Pass
		1902.5	-2.18	3.97	28.18	22.03	159.588	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-2.60	3.81	28.35	21.94	156.315	Horizontal	Pass
		1880	-1.37	3.96	28.22	22.89	194.536	Horizontal	Pass
		1900	-2.07	4.00	28.16	22.09	161.808	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.80	3.76	28.24	21.68	147.231	Vertical	Pass
		1880	-2.82	3.91	28.22	21.49	140.929	Vertical	Pass
		1909.3	-2.32	3.93	28.20	21.95	156.675	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-3.23	3.77	28.23	21.23	132.739	Vertical	Pass
		1880	-2.70	3.91	28.24	21.63	145.546	Vertical	Pass
		1908.5	-2.38	3.94	28.25	21.93	155.955	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.55	3.77	28.31	21.99	158.125	Vertical	Pass
		1880	-2.62	3.91	28.22	21.69	147.571	Vertical	Pass
		1907.5	-3.11	3.94	28.20	21.15	130.317	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-3.51	3.79	28.33	21.03	126.765	Vertical	Pass
		1880	-2.77	3.95	28.22	21.50	141.254	Vertical	Pass
		1905	-2.83	3.97	28.19	21.39	137.721	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-3.23	3.79	28.34	21.32	135.519	Vertical	Pass
		1880	-2.68	3.95	28.22	21.59	144.212	Vertical	Pass
		1902.5	-2.99	3.97	28.18	21.22	132.434	Vertical	Pass

20.0MHz Band 16 QAM	1/#Mid	1860	-3.30	3.81	28.35	21.24	133.045	Vertical	Pass
		1880	-2.96	3.96	28.22	21.30	134.896	Vertical	Pass
		1900	-3.07	4.00	28.16	21.09	128.529	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1710.7	-2.14	3.12	27.58	22.32	170.608	Horizontal	Pass
		1732.5	-2.02	3.27	27.61	22.32	170.608	Horizontal	Pass
		1754.3	-1.82	3.29	27.63	22.52	178.649	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-2.34	3.13	27.61	22.14	163.682	Horizontal	Pass
		1732.5	-2.10	3.27	27.61	22.24	167.494	Horizontal	Pass
		1753.5	-2.06	3.30	27.62	22.26	168.267	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-2.27	3.13	27.63	22.23	167.109	Horizontal	Pass
		1732.5	-2.21	3.27	27.61	22.13	163.305	Horizontal	Pass
		1752.5	-1.98	3.30	27.60	22.32	170.608	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-2.04	3.15	27.64	22.45	175.792	Horizontal	Pass
		1732.5	-2.12	3.31	27.61	22.18	165.196	Horizontal	Pass
		1750	-1.85	3.33	27.59	22.41	174.181	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-2.26	3.15	27.65	22.24	167.494	Horizontal	Pass
		1732.5	-2.13	3.31	27.61	22.17	164.816	Horizontal	Pass
		1747.5	-1.81	3.33	27.57	22.43	174.985	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-2.17	3.17	27.66	22.32	170.608	Horizontal	Pass
		1732.5	-1.85	3.32	27.61	22.44	175.388	Horizontal	Pass
		1745	-1.68	3.36	27.56	22.52	178.649	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-2.54	3.12	27.58	21.92	155.597	Vertical	Pass
		1732.5	-3.30	3.27	27.61	21.04	127.057	Vertical	Pass
		1754.3	-2.52	3.29	27.63	21.82	152.055	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-2.94	3.13	27.61	21.54	142.561	Vertical	Pass
		1732.5	-2.85	3.27	27.61	21.49	140.929	Vertical	Pass
		1753.5	-2.36	3.30	27.62	21.96	157.036	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-2.75	3.13	27.63	21.75	149.624	Vertical	Pass
		1732.5	-3.08	3.27	27.61	21.26	133.660	Vertical	Pass
		1752.5	-2.59	3.30	27.60	21.71	148.252	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1715	-2.84	3.15	27.64	21.65	146.218	Vertical	Pass
		1732.5	-2.87	3.31	27.61	21.43	138.995	Vertical	Pass
		1750	-2.72	3.33	27.59	21.54	142.561	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-3.36	3.15	27.65	21.14	130.017	Vertical	Pass
		1732.5	-3.10	3.31	27.61	21.20	131.826	Vertical	Pass
		1747.5	-2.81	3.33	27.57	21.43	138.995	Vertical	Pass

20.0MHz	1/#Mid	1720	-3.49	3.17	27.66	21.00	125.893	Vertical	Pass
Band		1732.5	-2.49	3.32	27.61	21.80	151.356	Vertical	Pass
QPSK		1745	-2.33	3.36	27.56	21.87	153.815	Vertical	Pass

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-3.45	3.12	27.58	21.01	126.183	Horizontal	Pass
		1732.5	-3.21	3.27	27.61	21.13	129.718	Horizontal	Pass
		1754.3	-3.18	3.29	27.63	21.16	130.617	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.56	3.13	27.61	20.92	123.595	Horizontal	Pass
		1732.5	-3.39	3.27	27.61	20.95	124.451	Horizontal	Pass
		1753.5	-3.47	3.30	27.62	20.85	121.619	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-3.75	3.13	27.63	20.75	118.850	Horizontal	Pass
		1732.5	-3.58	3.27	27.61	20.76	119.124	Horizontal	Pass
		1752.5	-3.43	3.30	27.60	20.87	122.180	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-3.55	3.15	27.64	20.94	124.165	Horizontal	Pass
		1732.5	-2.96	3.31	27.61	21.34	136.144	Horizontal	Pass
		1750	-2.76	3.33	27.59	21.50	141.254	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-3.29	3.15	27.65	21.21	132.130	Horizontal	Pass
		1732.5	-3.45	3.31	27.61	20.85	121.619	Horizontal	Pass
		1747.5	-3.15	3.33	27.57	21.09	128.529	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-3.43	3.17	27.66	21.06	127.644	Horizontal	Pass
		1732.5	-2.71	3.32	27.61	21.58	143.880	Horizontal	Pass
		1745	-3.03	3.36	27.56	21.17	130.918	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-3.99	3.12	27.58	20.47	111.429	Vertical	Pass
		1732.5	-3.35	3.27	27.61	20.99	125.603	Vertical	Pass
		1754.3	-4.27	3.29	27.63	20.07	101.625	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.75	3.13	27.61	20.73	118.304	Vertical	Pass
		1732.5	-3.64	3.27	27.61	20.70	117.490	Vertical	Pass
		1753.5	-3.46	3.30	27.62	20.86	121.899	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-4.45	3.13	27.63	20.05	101.158	Vertical	Pass
		1732.5	-3.95	3.27	27.61	20.39	109.396	Vertical	Pass
		1752.5	-4.24	3.30	27.60	20.06	101.391	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-4.09	3.15	27.64	20.40	109.648	Vertical	Pass
		1732.5	-4.20	3.31	27.61	20.10	102.329	Vertical	Pass
		1750	-3.42	3.33	27.59	20.84	121.339	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-3.75	3.15	27.65	20.75	118.850	Vertical	Pass
		1732.5	-4.14	3.31	27.61	20.16	103.753	Vertical	Pass
		1747.5	-3.78	3.33	27.57	20.46	111.173	Vertical	Pass
20.0MHz	1/#Mid	1720	-4.35	3.17	27.66	20.14	103.276	Vertical	Pass

Band 16 QAM		1732.5	-3.86	3.32	27.61	20.43	110.408	Vertical	Pass
		1745	-3.71	3.36	27.56	20.49	111.944	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	824.7	7.64	2.01	19.68	2.15	23.16	207.014	Horizontal	Pass
		836.5	7.30	2.01	19.77	2.15	22.91	195.434	Horizontal	Pass
		848.3	7.55	2.02	19.82	2.15	23.20	208.930	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	825.5	7.79	2.01	19.70	2.15	23.33	215.278	Horizontal	Pass
		836.5	7.38	2.01	19.77	2.15	22.99	199.067	Horizontal	Pass
		847.5	7.60	2.02	19.81	2.15	23.24	210.863	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	826.5	7.80	2.01	19.71	2.15	23.35	216.272	Horizontal	Pass
		836.5	7.51	2.01	19.77	2.15	23.12	205.116	Horizontal	Pass
		846.5	7.72	2.02	19.79	2.15	23.34	215.774	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	829	8.26	2.01	19.73	2.15	23.83	241.546	Horizontal	Pass
		836.5	7.46	2.01	19.77	2.15	23.07	202.768	Horizontal	Pass
		844	8.38	2.02	19.78	2.15	23.99	250.611	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	824.7	6.88	2.01	19.68	2.15	22.40	173.780	Vertical	Pass
		836.5	7.00	2.01	19.77	2.15	22.61	182.390	Vertical	Pass
		848.3	7.19	2.02	19.82	2.15	22.84	192.309	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	825.5	7.26	2.01	19.70	2.15	22.80	190.546	Vertical	Pass
		836.5	6.40	2.01	19.77	2.15	22.01	158.855	Vertical	Pass
		847.5	7.23	2.02	19.81	2.15	22.87	193.642	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	826.5	7.31	2.01	19.71	2.15	22.86	193.197	Vertical	Pass
		836.5	7.04	2.01	19.77	2.15	22.65	184.077	Vertical	Pass
		846.5	6.48	2.02	19.79	2.15	22.10	162.181	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	829	6.83	2.01	19.73	2.15	22.40	173.780	Vertical	Pass
		836.5	6.50	2.01	19.77	2.15	22.11	162.555	Vertical	Pass
		844	6.97	2.02	19.78	2.15	22.58	181.134	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	824.7	6.71	2.01	19.68	2.15	22.23	167.109	Horizontal	Pass
		836.5	6.79	2.01	19.77	2.15	22.40	173.780	Horizontal	Pass
		848.3	6.37	2.02	19.82	2.15	22.02	159.221	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	6.10	2.01	19.70	2.15	21.64	145.881	Horizontal	Pass
		836.5	6.06	2.01	19.77	2.15	21.67	146.893	Horizontal	Pass
		847.5	6.25	2.02	19.81	2.15	21.89	154.525	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	6.37	2.01	19.71	2.15	21.92	155.597	Horizontal	Pass
		836.5	5.76	2.01	19.77	2.15	21.37	137.088	Horizontal	Pass
		846.5	5.98	2.02	19.79	2.15	21.60	144.544	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	829	6.32	2.01	19.73	2.15	21.89	154.525	Horizontal	Pass
		836.5	6.85	2.01	19.77	2.15	22.46	176.198	Horizontal	Pass
		844	6.36	2.02	19.78	2.15	21.97	157.398	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	824.7	6.41	2.01	19.68	2.15	21.93	155.955	Vertical	Pass
		836.5	5.96	2.01	19.77	2.15	21.57	143.549	Vertical	Pass
		848.3	5.65	2.02	19.82	2.15	21.30	134.896	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	5.90	2.01	19.70	2.15	21.44	139.316	Vertical	Pass
		836.5	6.00	2.01	19.77	2.15	21.61	144.877	Vertical	Pass
		847.5	5.84	2.02	19.81	2.15	21.48	140.605	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	5.67	2.01	19.71	2.15	21.22	132.434	Vertical	Pass
		836.5	6.08	2.01	19.77	2.15	21.69	147.571	Vertical	Pass
		846.5	6.01	2.02	19.79	2.15	21.63	145.546	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	829	5.72	2.01	19.73	2.15	21.29	134.586	Vertical	Pass
		836.5	5.77	2.01	19.77	2.15	21.38	137.404	Vertical	Pass
		844	5.80	2.02	19.78	2.15	21.41	138.357	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	-0.20	4.54	27.75	23.01	199.986	Horizontal	Pass
		2535	0.29	4.69	27.72	23.32	214.783	Horizontal	Pass
		2567.5	0.35	4.71	27.71	23.35	216.272	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	0.22	4.55	27.76	23.43	220.293	Horizontal	Pass
		2535	0.45	4.69	27.72	23.48	222.844	Horizontal	Pass
		2565	0.89	4.72	27.70	23.87	243.781	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-0.02	4.55	27.77	23.20	208.930	Horizontal	Pass
		2535	0.48	4.69	27.72	23.51	224.388	Horizontal	Pass
		2562.5	0.57	4.72	27.69	23.54	225.944	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	0.34	4.57	27.78	23.55	226.464	Horizontal	Pass
		2535	0.92	4.73	27.72	23.91	246.037	Horizontal	Pass
		2560	0.65	4.75	27.68	23.58	228.034	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-0.96	4.54	27.75	22.25	167.880	Vertical	Pass
		2535	-0.93	4.69	27.72	22.10	162.181	Vertical	Pass
		2567.5	-0.64	4.71	27.71	22.36	172.187	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-0.96	4.55	27.76	22.25	167.880	Vertical	Pass
		2535	-0.61	4.69	27.72	22.42	174.582	Vertical	Pass
		2565	-0.79	4.72	27.70	22.19	165.577	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-0.54	4.55	27.77	22.68	185.353	Vertical	Pass
		2535	-0.25	4.69	27.72	22.78	189.671	Vertical	Pass
		2562.5	-0.26	4.72	27.69	22.71	186.638	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-1.03	4.57	27.78	22.18	165.196	Vertical	Pass
		2535	-0.93	4.73	27.72	22.06	160.694	Vertical	Pass
		2560	-0.65	4.75	27.68	22.28	169.044	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	-1.40	4.54	27.75	21.81	151.705	Horizontal	Pass
		2535	-1.09	4.69	27.72	21.94	156.315	Horizontal	Pass
		2567.5	-1.07	4.71	27.71	21.93	155.955	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-0.98	4.55	27.76	22.23	167.109	Horizontal	Pass
		2535	-1.04	4.69	27.72	21.99	158.125	Horizontal	Pass
		2565	-0.50	4.72	27.70	22.48	177.011	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-1.31	4.55	27.77	21.91	155.239	Horizontal	Pass
		2535	-0.92	4.69	27.72	22.11	162.555	Horizontal	Pass
		2562.5	-0.68	4.72	27.69	22.29	169.434	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-0.97	4.57	27.78	22.24	167.494	Horizontal	Pass
		2535	-0.80	4.73	27.72	22.19	165.577	Horizontal	Pass
		2560	-0.43	4.75	27.68	22.50	177.828	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-1.44	4.54	27.75	21.77	150.314	Vertical	Pass
		2535	-1.91	4.69	27.72	21.12	129.420	Vertical	Pass
		2567.5	-1.25	4.71	27.71	21.75	149.624	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-1.95	4.55	27.76	21.26	133.660	Vertical	Pass
		2535	-1.78	4.69	27.72	21.25	133.352	Vertical	Pass
		2565	-1.40	4.72	27.70	21.58	143.880	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-1.68	4.55	27.77	21.54	142.561	Vertical	Pass
		2535	-1.70	4.69	27.72	21.33	135.831	Vertical	Pass
		2562.5	-1.92	4.72	27.69	21.05	127.350	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-1.38	4.57	27.78	21.83	152.405	Vertical	Pass
		2535	-1.75	4.73	27.72	21.24	133.045	Vertical	Pass
		2560	-1.66	4.75	27.68	21.27	133.968	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Antenna Gain	Correction	Max. ERP	Max. ERP	Polarization	
			(dBm)	(dBm)	(dB)	(dB)	Average	Average	Of Max. ERP	
							(dBm)	(mW)		
1.4MHz	1/#Mid	699.7	8.96	1.91	19.21	2.15	24.11	257.632	Horizontal	Pass
Band		707.5	8.98	1.91	19.26	2.15	24.18	261.818	Horizontal	Pass
QPSK		715.3	8.76	1.93	19.34	2.15	24.02	252.348	Horizontal	Pass
3.0MHz	1/#Mid	700.5	8.89	1.91	19.21	2.15	24.04	253.513	Horizontal	Pass
Band		707.5	8.89	1.91	19.26	2.15	24.09	256.448	Horizontal	Pass
QPSK		714.5	8.93	1.93	19.34	2.15	24.19	262.422	Horizontal	Pass
5.0MHz	1/#Mid	701.5	8.86	1.91	19.23	2.15	24.03	252.930	Horizontal	Pass
Band		707.5	8.97	1.91	19.26	2.15	24.17	261.216	Horizontal	Pass
QPSK		713.5	8.87	1.92	19.33	2.15	24.13	258.821	Horizontal	Pass
10.0MHz	1/#Mid	704	8.93	1.91	19.25	2.15	24.12	258.226	Horizontal	Pass
Band		707.5	9.02	1.91	19.26	2.15	24.22	264.241	Horizontal	Pass
QPSK		711	8.81	1.92	19.32	2.15	24.06	254.683	Horizontal	Pass
1.4MHz	1/#Mid	699.7	6.97	1.91	19.21	2.15	22.12	162.930	Vertical	Pass
Band		707.5	7.76	1.91	19.26	2.15	22.96	197.697	Vertical	Pass
QPSK		715.3	7.62	1.93	19.34	2.15	22.88	194.089	Vertical	Pass
3.0MHz	1/#Mid	700.5	7.78	1.91	19.21	2.15	22.93	196.336	Vertical	Pass
Band		707.5	7.68	1.91	19.26	2.15	22.88	194.089	Vertical	Pass
QPSK		714.5	7.15	1.93	19.34	2.15	22.41	174.181	Vertical	Pass
5.0MHz	1/#Mid	701.5	7.77	1.91	19.23	2.15	22.94	196.789	Vertical	Pass
Band		707.5	7.66	1.91	19.26	2.15	22.86	193.197	Vertical	Pass
QPSK		713.5	7.27	1.92	19.33	2.15	22.53	179.061	Vertical	Pass
10.0MHz	1/#Mid	704	7.5	1.91	19.25	2.15	22.69	185.780	Vertical	Pass
Band		707.5	7.3	1.91	19.26	2.15	22.50	177.828	Vertical	Pass
QPSK		711	7.14	1.92	19.32	2.15	22.39	173.380	Vertical	Pass

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz	1/#Mid	699.7	8.15	1.91	19.21	2.15	23.30	213.796	Horizontal	Pass
Band 16		707.5	8.22	1.91	19.26	2.15	23.42	219.786	Horizontal	Pass
QAM		715.3	7.99	1.93	19.34	2.15	23.25	211.349	Horizontal	Pass
3.0MHz	1/#Mid	700.5	8.19	1.91	19.21	2.15	23.34	215.774	Horizontal	Pass
Band 16		707.5	8.15	1.91	19.26	2.15	23.35	216.272	Horizontal	Pass
QAM		714.5	8.04	1.93	19.34	2.15	23.30	213.796	Horizontal	Pass
5.0MHz	1/#Mid	701.5	8.23	1.91	19.23	2.15	23.40	218.776	Horizontal	Pass
Band 16		707.5	8.13	1.91	19.26	2.15	23.33	215.278	Horizontal	Pass
QAM		713.5	8.26	1.92	19.33	2.15	23.52	224.905	Horizontal	Pass
10.0MHz	1/#Mid	704	8.21	1.91	19.25	2.15	23.40	218.776	Horizontal	Pass
Band 16		707.5	8.36	1.91	19.26	2.15	23.56	226.986	Horizontal	Pass
QAM		711	8.05	1.92	19.32	2.15	23.30	213.796	Horizontal	Pass
1.4MHz	1/#Mid	699.7	7.49	1.91	19.21	2.15	22.64	183.654	Vertical	Pass
Band 16		707.5	7.72	1.91	19.26	2.15	22.92	195.884	Vertical	Pass
QAM		715.3	7.03	1.93	19.34	2.15	22.29	169.434	Vertical	Pass
3.0MHz	1/#Mid	700.5	7.5	1.91	19.21	2.15	22.65	184.077	Vertical	Pass
Band 16		707.5	7.03	1.91	19.26	2.15	22.23	167.109	Vertical	Pass
QAM		714.5	7.57	1.93	19.34	2.15	22.83	191.867	Vertical	Pass
5.0MHz	1/#Mid	701.5	7.31	1.91	19.23	2.15	22.48	177.011	Vertical	Pass
Band 16		707.5	7.7	1.91	19.26	2.15	22.90	194.984	Vertical	Pass
QAM		713.5	7.1	1.92	19.33	2.15	22.36	172.187	Vertical	Pass
10.0MHz	1/#Mid	704	7.61	1.91	19.25	2.15	22.80	190.546	Vertical	Pass
Band 16		707.5	7.06	1.91	19.26	2.15	22.26	168.267	Vertical	Pass
QAM		711	7.72	1.92	19.32	2.15	22.97	198.153	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

ERP(dBm)=EIRP-2.15

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53

LIMIT

§22.917 (e) and §24.238 and §90.691 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1

MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 2/4/5/7/12

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-53.04	4.04	33.51	-23.57	-13	-10.57	Horizontal
3701.4	-47.24	4.04	33.51	-17.77	-13	-4.77	Vertical
5552.1	-51.23	5.24	35.84	-20.63	-13	-7.63	Vertical
5552.1	-51.87	5.24	35.84	-21.27	-13	-8.27	Horizontal
200.2	-39.26	1.43	16.02	-24.67	-13	-11.67	Vertical
320.5	-38.99	1.30	17.99	-22.30	-13	-9.30	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-50.57	4.04	33.56	-21.05	-13	-8.05	Horizontal
3760.0	-48.76	4.04	33.56	-19.24	-13	-6.24	Vertical
5640.0	-49.87	5.24	35.91	-19.20	-13	-6.20	Vertical
5640.0	-50.81	5.24	35.91	-20.14	-13	-7.14	Horizontal
183.5	-40.88	1.62	16.97	-25.53	-13	-12.53	Vertical
247.8	-43.71	1.74	15.98	-29.48	-13	-16.48	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-47.94	4.04	34.00	-17.98	-13	-4.98	Horizontal
3818.6	-51.26	4.04	34.00	-21.30	-13	-8.30	Vertical
5727.9	-53.18	5.24	36.04	-22.38	-13	-9.38	Vertical
5727.9	-52.41	5.24	36.04	-21.61	-13	-8.61	Horizontal
198.3	-42.58	1.42	17.29	-26.71	-13	-13.71	Vertical
272.0	-37.84	1.50	17.90	-21.43	-13	-8.43	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-46.35	4.07	33.54	-16.88	-13	-3.88	Horizontal
3720.0	-50.19	4.07	33.54	-20.72	-13	-7.72	Vertical
5580.0	-50.24	5.28	35.86	-19.66	-13	-6.66	Vertical
5580.0	-49.40	5.28	35.86	-18.82	-13	-5.82	Horizontal
204.7	-37.93	1.58	16.89	-22.61	-13	-9.61	Vertical
346.2	-42.37	1.76	17.26	-26.87	-13	-13.87	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-48.84	4.04	33.56	-19.32	-13	-6.32	Horizontal
3760.0	-52.18	4.04	33.56	-22.66	-13	-9.66	Vertical
5640.0	-48.47	5.24	35.91	-17.80	-13	-4.80	Vertical
5640.0	-49.49	5.24	35.91	-18.82	-13	-5.82	Horizontal
179.1	-44.90	1.46	16.27	-30.09	-13	-17.09	Vertical
377.8	-35.95	1.59	15.15	-22.39	-13	-9.39	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-49.63	4.04	34.00	-19.67	-13	-6.67	Horizontal
3800.0	-46.29	4.04	34.00	-16.33	-13	-3.33	Vertical
5700.0	-53.36	5.24	36.04	-22.56	-13	-9.56	Vertical
5700.0	-49.66	5.24	36.04	-18.86	-13	-5.86	Horizontal
207.0	-43.15	1.36	17.39	-27.11	-13	-14.11	Vertical
456.6	-35.40	1.66	15.39	-21.67	-13	-8.67	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

Over Limit= : P_{Mea}(dBm)-Limit(dBm)

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-48.19	4.02	29.80	-22.41	-13	-9.41	Horizontal
3421.4	-48.20	4.02	29.80	-22.42	-13	-9.42	Vertical
5132.1	-52.91	5.24	35.84	-22.31	-13	-9.31	Vertical
5132.1	-50.44	5.24	35.84	-19.84	-13	-6.84	Horizontal
203.9	-35.78	1.68	16.04	-21.42	-13	-8.42	Vertical
346.1	-37.24	1.78	17.74	-21.28	-13	-8.28	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-53.46	4.03	30.00	-27.49	-13	-14.49	Horizontal
3465.0	-44.04	4.03	30.00	-18.07	-13	-5.07	Vertical
5197.5	-50.33	5.25	35.86	-19.72	-13	-6.72	Vertical
5197.5	-53.71	5.25	35.86	-23.10	-13	-10.10	Horizontal
200.4	-39.53	1.72	17.69	-23.56	-13	-10.56	Vertical
403.7	-44.13	1.62	16.02	-29.72	-13	-16.72	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-51.60	4.05	30.01	-25.64	-13	-12.64	Horizontal
3508.6	-47.85	4.05	30.01	-21.89	-13	-8.89	Vertical
5262.9	-53.96	5.26	35.86	-23.36	-13	-10.36	Vertical
5262.9	-52.02	5.26	35.86	-21.42	-13	-8.42	Horizontal
185.2	-35.26	1.80	16.69	-20.37	-13	-7.37	Vertical
389.7	-36.11	1.75	16.66	-21.21	-13	-8.21	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-46.62	4.02	29.80	-20.84	-13	-7.84	Horizontal
3440.0	-50.39	4.02	29.80	-24.61	-13	-11.61	Vertical
5160.0	-44.85	5.24	35.84	-14.25	-13	-1.25	Vertical
5160.0	-52.30	5.24	35.84	-21.70	-13	-8.70	Horizontal
198.4	-39.05	1.57	17.26	-23.36	-13	-10.36	Vertical
365.5	-43.33	1.78	16.35	-28.76	-13	-15.76	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.75	4.03	30.00	-22.78	-13	-9.78	Horizontal
3465.0	-50.17	4.03	30.00	-24.20	-13	-11.20	Vertical
5197.5	-53.21	5.25	35.86	-22.60	-13	-9.60	Vertical
5197.5	-52.81	5.25	35.86	-22.20	-13	-9.20	Horizontal
179.5	-37.02	1.44	17.95	-20.51	-13	-7.51	Vertical
235.5	-44.71	1.65	16.09	-30.27	-13	-17.27	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-44.62	2.91	27.68	-19.85	-13	-6.85	Horizontal
3490.0	-49.37	2.91	27.68	-24.60	-13	-11.60	Vertical
5235.0	-48.74	5.26	35.86	-18.14	-13	-5.14	Vertical
5235.0	-52.58	5.26	35.86	-21.98	-13	-8.98	Horizontal
187.5	-41.24	1.61	16.85	-26.00	-13	-13.00	Vertical
457.8	-39.68	1.61	15.19	-26.10	-13	-13.10	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

Over Limit= : P_{Mea}(dBm)-Limit(dBm)

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-50.18	2.78	27.50	-25.46	-13	-12.46	Horizontal
1649.4	-51.92	2.78	27.50	-27.20	-13	-14.20	Vertical
2474.1	-49.37	2.90	27.80	-24.47	-13	-11.47	Vertical
2474.1	-53.75	2.90	27.80	-28.85	-13	-15.85	Horizontal
213.0	-44.62	1.76	17.59	-28.79	-13	-15.79	Vertical
255.6	-44.60	1.63	15.87	-30.36	-13	-17.36	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-48.68	2.80	27.48	-24.00	-13	-11.00	Horizontal
1673.0	-53.10	2.80	27.48	-28.42	-13	-15.42	Vertical
2509.5	-44.41	2.91	27.70	-19.62	-13	-6.62	Vertical
2509.5	-53.56	2.91	27.70	-28.77	-13	-15.77	Horizontal
199.0	-41.75	1.61	15.68	-27.68	-13	-14.68	Vertical
459.1	-34.48	1.59	17.52	-18.56	-13	-5.56	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-49.27	2.82	27.43	-24.66	-13	-11.66	Horizontal
1696.6	-48.83	2.82	27.43	-24.22	-13	-11.22	Vertical
2544.9	-47.23	2.92	27.74	-22.41	-13	-9.41	Vertical
2544.9	-52.42	2.92	27.74	-27.60	-13	-14.60	Horizontal
196.4	-43.26	1.69	16.67	-28.27	-13	-15.27	Vertical
401.9	-35.83	1.70	17.18	-20.35	-13	-7.35	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-48.12	2.78	27.50	-23.40	-13	-10.40	Horizontal
1658.0	-53.54	2.78	27.50	-28.82	-13	-15.82	Vertical
2487.0	-52.48	2.90	27.80	-27.58	-13	-14.58	Vertical
2487.0	-50.53	2.90	27.80	-25.63	-13	-12.63	Horizontal
202.0	-44.77	1.71	15.57	-30.91	-13	-17.91	Vertical
285.6	-37.90	1.34	16.40	-22.84	-13	-9.84	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-49.43	2.80	27.48	-24.75	-13	-11.75	Horizontal
1673.0	-47.33	2.80	27.48	-22.65	-13	-9.65	Vertical
2509.5	-46.25	2.91	27.70	-21.46	-13	-8.46	Vertical
2509.5	-49.38	2.91	27.70	-24.59	-13	-11.59	Horizontal
206.1	-40.98	1.44	17.04	-25.38	-13	-12.38	Vertical
339.5	-39.41	1.76	17.62	-23.55	-13	-10.55	Horizontal
Test Results for High Channel 844MHz							
1688.0	-44.13	2.82	27.43	-19.52	-13	-6.52	Horizontal
1688.0	-44.52	2.82	27.43	-19.91	-13	-6.91	Vertical
2532.0	-48.22	2.92	27.74	-23.40	-13	-10.40	Vertical
2532.0	-50.47	2.92	27.74	-25.65	-13	-12.65	Horizontal
212.7	-42.89	1.74	17.70	-26.93	-13	-13.93	Vertical
289.5	-42.35	1.41	17.46	-26.29	-13	-13.29	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-64.88	5.23	35.81	-34.30	-25	-9.30	Horizontal
5005.0	-60.45	5.23	35.81	-29.87	-25	-4.87	Vertical
7507.5	-61.55	5.67	36.85	-30.37	-25	-5.37	Vertical
7507.5	-61.39	5.67	36.85	-30.21	-25	-5.21	Horizontal
191.9	-50.14	1.73	17.97	-33.90	-25	-8.90	Vertical
307.1	-45.94	1.38	15.11	-32.21	-25	-7.21	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-61.68	5.23	35.82	-31.09	-25	-6.09	Horizontal
5070.0	-59.91	5.23	35.82	-29.32	-25	-4.32	Vertical
7605.0	-62.08	5.67	36.85	-30.90	-25	-5.90	Vertical
7605.0	-59.57	5.67	36.85	-28.39	-25	-3.39	Horizontal
205.9	-45.64	1.77	16.17	-31.23	-25	-6.23	Vertical
341.7	-49.63	1.63	15.21	-36.05	-25	-11.05	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-59.97	5.24	35.83	-29.38	-25	-4.38	Horizontal
5135.0	-61.85	5.24	35.83	-31.26	-25	-6.26	Vertical
7702.5	-62.55	5.68	36.87	-31.36	-25	-6.36	Vertical
7702.5	-60.97	5.68	36.87	-29.78	-25	-4.78	Horizontal
197.0	-51.89	1.58	17.56	-35.91	-25	-10.91	Vertical
427.2	-48.27	1.45	16.58	-33.14	-25	-8.14	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (10.0MHZ BANDWIDTH)

Test Results for Low Channel 2505MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-64.34	5.23	35.82	-33.75	-25	-8.75	Horizontal
5020.0	-60.35	5.23	35.82	-29.76	-25	-4.76	Vertical
7530.0	-59.32	5.67	36.86	-28.13	-25	-3.13	Vertical
7530.0	-59.22	5.67	36.86	-28.03	-25	-3.03	Horizontal
212.7	-51.42	1.63	15.76	-37.29	-25	-12.29	Vertical
378.5	-49.36	1.71	15.44	-35.63	-25	-10.63	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-60.46	5.23	35.82	-29.87	-25	-4.87	Horizontal
5070.0	-63.40	5.23	35.82	-32.81	-25	-7.81	Vertical
7605.0	-61.54	5.67	36.85	-30.36	-25	-5.36	Vertical
7605.0	-64.05	5.67	36.85	-32.87	-25	-7.87	Horizontal
188.8	-51.42	1.79	16.84	-36.36	-25	-11.36	Vertical
343.4	-47.65	1.71	17.64	-31.72	-25	-6.72	Horizontal
Test Results for High Channel 2565MHz							
5120.0	-60.90	5.24	35.83	-30.31	-25	-5.31	Horizontal
5120.0	-59.09	5.24	35.83	-28.50	-25	-3.50	Vertical
7680.0	-63.36	5.70	36.88	-32.18	-25	-7.18	Vertical
7680.0	-61.10	5.70	36.88	-29.92	-25	-4.92	Horizontal
184.7	-47.84	1.79	16.84	-32.78	-25	-7.78	Vertical
466.8	-49.03	1.71	17.64	-33.10	-25	-8.10	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-48.37	2.60	27.20	-23.77	-13	-10.77	Horizontal
1399.4	-48.75	2.60	27.20	-24.15	-13	-11.15	Vertical
2099.1	-46.10	2.85	27.54	-21.41	-13	-8.41	Vertical
2099.1	-53.82	2.85	27.54	-29.13	-13	-16.13	Horizontal
205.0	-39.67	1.49	17.78	-23.38	-13	-10.38	Vertical
333.2	-34.88	1.36	17.33	-18.91	-13	-5.91	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-52.19	2.61	27.28	-27.52	-13	-14.52	Horizontal
1415.0	-52.99	2.61	27.28	-28.32	-13	-15.32	Vertical
2122.5	-47.22	2.87	27.59	-22.50	-13	-9.50	Vertical
2122.5	-52.21	2.87	27.59	-27.49	-13	-14.49	Horizontal
199.0	-42.14	1.73	15.74	-28.13	-13	-15.13	Vertical
298.7	-37.32	1.62	15.79	-23.15	-13	-10.15	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-47.20	2.63	27.28	-22.55	-13	-9.55	Horizontal
1430.6	-53.54	2.63	27.28	-28.89	-13	-15.89	Vertical
2145.9	-49.28	2.88	27.60	-24.56	-13	-11.56	Vertical
2145.9	-49.38	2.88	27.60	-24.66	-13	-11.66	Horizontal
198.1	-40.14	1.61	18.00	-23.75	-13	-10.75	Vertical
466.6	-34.37	1.45	15.49	-20.34	-13	-7.34	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-46.46	2.61	27.26	-21.81	-13	-8.81	Horizontal
1408.0	-48.64	2.61	27.26	-23.99	-13	-10.99	Vertical
2112.0	-53.41	2.87	27.58	-28.70	-13	-15.70	Vertical
2112.0	-49.15	2.87	27.58	-24.44	-13	-11.44	Horizontal
207.8	-37.35	1.31	16.97	-21.69	-13	-8.69	Vertical
445.8	-41.39	1.65	16.70	-26.34	-13	-13.34	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-50.79	2.61	27.28	-26.12	-13	-13.12	Horizontal
1415.0	-44.08	2.61	27.28	-19.41	-13	-6.41	Vertical
2122.5	-45.18	2.87	27.59	-20.46	-13	-7.46	Vertical
2122.5	-49.73	2.87	27.59	-25.01	-13	-12.01	Horizontal
194.7	-38.34	1.72	17.99	-22.07	-13	-9.07	Vertical
250.2	-39.19	1.73	17.94	-22.98	-13	-9.98	Horizontal
Test Results for High Channel 711MHz							
1422.0	-49.01	2.62	27.28	-24.35	-13	-11.35	Horizontal
1422.0	-44.83	2.62	27.28	-20.17	-13	-7.17	Vertical
2133.0	-52.57	2.87	27.60	-27.84	-13	-14.84	Vertical
2133.0	-51.56	2.87	27.60	-26.83	-13	-13.83	Horizontal
210.1	-44.29	1.58	15.93	-29.94	-13	-16.94	Vertical
461.5	-40.81	1.36	15.59	-26.58	-13	-13.58	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

Over Limit= : P_{Mea}(dBm)-Limit(dBm)

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

4G and SRD can be transmitted simultaneously which is the worst data recorded in the report.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 4.2V, Normal, DC 12V and High voltage, DC 16V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2/4/5/7/12

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	1880	13.1	0.006984	2.5
12	1880	13.7	0.007296	2.5
16	1880	13.5	0.007200	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	13.0	0.006906	2.5
Extreme (50C)	1880	11.3	0.005997	2.5
Extreme (40C)	1880	13.5	0.007181	2.5
Extreme (30C)	1880	13.4	0.007115	2.5
Extreme (10C)	1880	14.4	0.007644	2.5
Extreme (0C)	1880	11.6	0.006178	2.5
Extreme (-10C)	1880	13.5	0.007170	2.5
Extreme (-20C)	1880	14.1	0.007491	2.5
Extreme (-30C)	1880	14.8	0.007881	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	1880	9.5	0.005078	2.5
12	1880	8.6	0.004589	2.5
16	1880	7.9	0.004178	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	9.7	0.005182	2.5
Extreme (50C)	1880	9.3	0.004969	2.5
Extreme (40C)	1880	8.4	0.004474079	2.5
Extreme (30C)	1880	9.1	0.004849245	2.5
Extreme (10C)	1880	8.8	0.004669034	2.5
Extreme (0C)	1880	7.8	0.004137911	2.5
Extreme (-10C)	1880	9.1	0.004816457	2.5
Extreme (-20C)	1880	9.2	0.004887561	2.5
Extreme (-30C)	1880	8.3	0.004400096	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	1732.5	9.1	0.005255	2.5
12	1732.5	9.0	0.005212	2.5
16	1732.5	8.1	0.004678	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	8.4	0.004872	2.5
Extreme (50C)	1732.5	8.6	0.004985	2.5
Extreme (40C)	1732.5	7.3	0.004210	2.5
Extreme (30C)	1732.5	6.1	0.003502	2.5
Extreme (10C)	1732.5	7.4	0.004274	2.5
Extreme (0C)	1732.5	9.9	0.005698	2.5
Extreme (-10C)	1732.5	8.6	0.004975	2.5
Extreme (-20C)	1732.5	6.8	0.003919	2.5
Extreme (-30C)	1732.5	8.8	0.005104	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	1732.5	9.3	0.005381	2.5
12	1732.5	9.1	0.005259	2.5
16	1732.5	8.3	0.004804	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	9.9	0.005701	2.5
Extreme (50C)	1732.5	8.5	0.004921	2.5
Extreme (40C)	1732.5	7.7	0.004451	2.5
Extreme (30C)	1732.5	8.8	0.005055	2.5
Extreme (10C)	1732.5	9.0	0.005182	2.5
Extreme (0C)	1732.5	8.0	0.004589	2.5
Extreme (-10C)	1732.5	8.6	0.004992	2.5
Extreme (-20C)	1732.5	8.5	0.004909	2.5
Extreme (-30C)	1732.5	8.1	0.004685	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	836.5	5.7	0.006796	2.5
12	836.5	6.5	0.007814	2.5
16	836.5	5.3	0.006321	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	5.9	0.007099	2.5
Extreme (50C)	836.5	6.2	0.007451	2.5
Extreme (40C)	836.5	6.4	0.007602	2.5
Extreme (30C)	836.5	5.9	0.007088	2.5
Extreme (10C)	836.5	5.3	0.006305	2.5
Extreme (0C)	836.5	5.3	0.006344	2.5
Extreme (-10C)	836.5	6.0	0.007124	2.5
Extreme (-20C)	836.5	6.0	0.007152	2.5
Extreme (-30C)	836.5	6.0	0.007115	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	836.5	5.7	0.006840	2.5
12	836.5	6.3	0.007474	2.5
16	836.5	4.6	0.005463	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	5.6	0.006732	2.5
Extreme (50C)	836.5	6.3	0.007546	2.5
Extreme (40C)	836.5	5.7	0.006776	2.5
Extreme (30C)	836.5	6.8	0.008107	2.5
Extreme (10C)	836.5	5.8	0.006955	2.5
Extreme (0C)	836.5	5.8	0.006916	2.5
Extreme (-10C)	836.5	5.2	0.006164	2.5
Extreme (-20C)	836.5	5.6	0.006732	2.5
Extreme (-30C)	836.5	6.5	0.007822	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (10MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	2535	10.2	0.004004	2.5
12	2535	8.9	0.003493	2.5
16	2535	8.6	0.003383	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	9.9	0.003890	2.5
Extreme (50C)	2535	9.2	0.003610	2.5
Extreme (40C)	2535	8.7	0.003415	2.5
Extreme (30C)	2535	8.7	0.003442	2.5
Extreme (10C)	2535	7.9	0.003118	2.5
Extreme (0C)	2535	8.8	0.003475	2.5
Extreme (-10C)	2535	9.7	0.003832	2.5
Extreme (-20C)	2535	8.4	0.003317	2.5
Extreme (-30C)	2535	8.5	0.003342	2.5

Band 7 16QAM, (10MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	2535	6.9	0.002722	2.5
12	2535	6.4	0.002524	2.5
16	2535	5.4	0.002145	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	5.9	0.002333	2.5
Extreme (40C)	2535	5.8	0.002293	2.5
Extreme (30C)	2535	6.4	0.002534	2.5
Extreme (10C)	2535	6.1	0.002387	2.5
Extreme (0C)	2535	4.9	0.001946	2.5
Extreme (-10C)	2535	5.5	0.002184	2.5
Extreme (-20C)	2535	6.4	0.002508	2.5
Extreme (-30C)	2535	5.3	0.002093	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

Band 12 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	707.5	8.8	0.012412	2.5
12	707.5	10.4	0.014695	2.5
16	707.5	8.3	0.011669	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	8.7	0.012246	2.5
Extreme (50C)	707.5	7.6	0.010765	2.5
Extreme (40C)	707.5	7.7	0.010921	2.5
Extreme (30C)	707.5	8.7	0.012314	2.5
Extreme (10C)	707.5	7.7	0.010859	2.5
Extreme (0C)	707.5	9.0	0.012679	2.5
Extreme (-10C)	707.5	8.2	0.011531	2.5
Extreme (-20C)	707.5	8.7	0.012261	2.5
Extreme (-30C)	707.5	7.4	0.010466	2.5

Band 12 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
4.2	707.5	6.9	0.009799	2.5
12	707.5	8.8	0.012368	2.5
16	707.5	7.2	0.010233	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	6.5	0.009175	2.5
Extreme (50C)	707.5	5.5	0.007765	2.5
Extreme (40C)	707.5	6.4	0.009110	2.5
Extreme (30C)	707.5	-7.7	-0.010912	2.5
Extreme (10C)	707.5	-8.2	-0.011590	2.5
Extreme (0C)	707.5	2.9	0.004100	2.5
Extreme (-10C)	707.5	-5.2	-0.007292	2.5
Extreme (-20C)	707.5	-8.7	-0.012302	2.5
Extreme (-30C)	707.5	-10.2	-0.014350	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

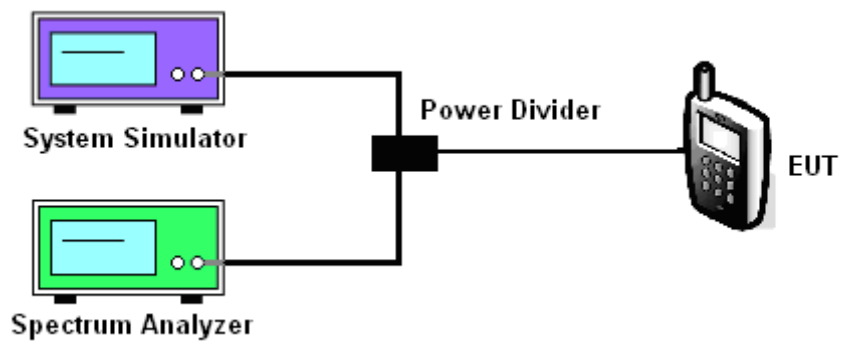

MODES TESTED

LTE Band 2/4/5/7/12

Test data reference attachment.

-----END OF REPORT-----