

FCC - TEST REPORT

Report Number : **60.790.21.075.01R01** Date of Issue : December 29, 2021

Model : QTM-UAR10, QTM-UMR10, QTM-SMR10

Product Type : Quantum RTLS Universal Anchor (for QTM-UAR10)
Quantum RTLS Universal Mobile (for QTM-UMR10)
Quantum RTLS Universal Tag (for QTM-SMR10)

Applicant : ZEROKEY INC.

Address : 3120 12TH ST NE, CALGARY ALBERTA, CANADA T2E 8T3

Production Facility : AUGUST ELECTRONIC INC.

Address : 1810 CENTRE AVE NE CALGARY ALBERTA CANADA T2E 0A6

Test Result : **nPositive** **o Negative**

Total pages
including
Appendices : 62

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

1 Table of Contents.....	2
2 Description of Equipment Under Test	3
3 Summary of Test Standards	4
4 Details about the Test Laboratory	5
4.1 Test Equipment Site List	6
4.2 Measurement System Uncertainty	7
5 Summary of Test Results.....	8
6 General Remarks.....	9
7 Test Setups.....	10
7.1 Radiated test setups Below 1GHz.....	10
7.2 Radiated test setups Above 1GHz	10
7.3 AC Power Line Conducted Emission test setups	11
7.4 Conducted RF test setups.....	11
8 Emission Test Results	12
8.1 Spurious Radiated Emission	12
8.2 Conducted Emission at AC Power line.....	16
8.3 6dB & 99% Bandwidth	18
8.4 Peak Output Power.....	24
8.5 Spurious Emissions at Antenna Terminals.....	30
8.6 100kHz Bandwidth of band edges.....	42
8.7 Power Spectral Density.....	46
8.8 Antenna Requirement.....	52
9 Test setup procedure	53
10 Appendix A - General Product Information	61
11 Appendix B - Declaration Letters	62

2 Description of Equipment Under Test

Description of the Equipment Under Test

Product: Quantum RTLS Universal Anchor (for QTM-UAR10)
 Quantum RTLS Universal Mobile (for QTM-UMR10)
 Quantum RTLS Universal Tag (for QTM-SMR10)

Model no.: QTM-UAR10, QTM-UMR10, QTM-SMR10

FCC ID: **2AX6LQTMUR10**

Rating: 3.7V DC (Form internal rechargeable battery)
 5.0V DC (Form USB port, for charging)

Frequency: Enhanced Shockburst: 2402MHz-2480MHz

Antenna gain: 5.46dBi

Mode: 1Mbps data rate mode, 2Mbps data rate mode

Number of operated channels: 40

Modulation: GFSK

Remark: ---

Auxiliary Equipment and Software Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Computer	Lenovo	X220	0A72168
AC/DC adapter	Apple	A1537	/

Auxiliary Software Used during Test:

DESCRIPTION	SOFTWARE NAME	VERSION	REMARK
RF Test Mode Software	nRF connect	3.7.1	Provided by applicant

3 Summary of Test Standards

Test Standards
FCC Part 15 Subpart C 10-1-20 Edition Federal Communications Commission, PART 15 — Radio Frequency Devices, Subpart C —Intentional Radiators

All the test methods were according to KDB558074 D01 v05r02 DTS Measurement Guidance and ANSI C63.10 (2013).

4 Details about the Test Laboratory

Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
 Building 12&13 Zhiheng Wisdomland Business Park,
 Nantou Checkpoint Road 2,
 Shenzhen 518052, P.R.China
 FCC Registration Number: 514049
 ISED test site number: 10320A

Emission Tests	
Test Item	Test Site
FCC Part 15 Subpart C	
FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission	Site 1
FCC Title 47 Part 15.207 Conduct Emission	Site 1
FCC Title 47 Part 15.247(a)(1) 6dB & 99% Bandwidth	Site 1
FCC Title 47 Part 15.247(b) Peak Output Power	Site 1
FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals	Site 1
FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges	Site 1
FCC Title 47 Part 15.247(e) Power Spectral Density	Site 1
FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement	Site 1

4.1 Test Equipment Site List

Radiated emission Test – Site 1

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2022-6-29
Signal Analyzer	Rohde & Schwarz	FSV40	101031	2022-6-22
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100398	2022-7-7
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2022-8-4
Horn Antenna	Rohde & Schwarz	HF907	102294	2022-7-5
Wideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	12827	2022-6-21
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2022-6-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	100432	2022-7-30
Attenuator	Agilent	8491A	MY39264334	2022-6-21
3m Semi-anechoic chamber	TDK	9X6X6	----	2022-10-28
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

Conducted Emission Test – Site 1

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2022-6-29
LISN	Rohde & Schwarz	ENV4200	100249	2022-6-12
LISN	Rohde & Schwarz	ENV432	101318	2022-6-12
LISN	Rohde & Schwarz	ENV216	100326	2022-6-12
LISN	Rohde & Schwarz	ENV216	102472	2022-6-12
ISN	Rohde & Schwarz	ENY81	100177	2022-6-12
ISN	Rohde & Schwarz	ENY81-CA6	101664	2022-6-12
High Voltage Probe	Schwarzbeck	TK9420(VT9420)	9420-584	2022-6-23
RF Current Probe	Rohde & Schwarz	EZ-17	100816	2022-6-28
Attenuator	Shanghai Huaxiang	TS2-26-3	080928189	2022-6-21
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A
Shielding Room	TDK	CSR #1	----	2022-11-07

20dB & 99% Bandwidth, Peak Output Power, Spurious Emissions at Antenna Terminals, 100kHz Bandwidth of band edges, Power Spectral Density – Site 1

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2022-6-21
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2022-6-21

4.2 Measurement System Uncertainty

Measurement System Uncertainty Emissions

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.66dB
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.68dB; Vertical: 4.65dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-25000MHz	Horizontal: 4.76dB; Vertical: 4.75dB;
Uncertainty for Conducted Emission at AC Power Line 150kHz-30MHz	2.72 dB
Uncertainty for conducted power test	1.27dB
Uncertainty for frequency test	0.6×10^{-7}

Measurement System Uncertainty Immunity

The measurement expanded uncertainties for defined systems are for a 95% confidence level, in accordance with the recommendations of ISO 17025.

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.

5 Summary of Test Results

Emission Tests				
FCC Part 15 Subpart C				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission	12-15	☒	☐	☐
FCC Title 47 Part 15.207 Conduct Emission	16-17	☒	☐	☐
FCC Title 47 Part 15.247(a)(2) 6dB & 99% Bandwidth	18-23	☒	☐	☐
FCC Title 47 Part 15.247(b) Peak Output Power	24-29	☒	☐	☐
FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals	30-41	☒	☐	☐
FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges	42-45	☒	☐	☐
FCC Title 47 Part 15.247(e) Power Spectral Density	46-51	☒	☐	☐
FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement	52	☒	☐	☐

6 General Remarks

Remarks

All mode & voltage has been tested, only worst case has shown.

Client informs that **QTM-UAR10** and, **QTM-UAR10** are in the same enclosure, use the same board and the **QTM-UAR10** model has the MEMS IMU sensors populated. **QTM-SMR10** uses a different enclosure and has a vibrator motor and piezo beeper installed. All other components are the same, and their PCB boards are completely same. (Client's conformation letter shown at Appendix B). All tests were performed on main model **QTM-UAR10**.

This submittal(s) (test report) is intended for **FCC ID: 2AX6LQTMUR10**, complies with Section 15.203, 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules for the DTS grant.

The TX and RX range is 2402MHz-2480MHz.

SUMMARY:

- All tests according to the regulations cited on page 8 were

n - Performed

o - **Not** Performed

- The Equipment Under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: June 21, 2021

Testing Start Date: July 9, 2021



Testing End Date: July 27, 2021

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:




Eric LI
EMC Project Manager

Hosea CHAN
EMC Project Engineer


Louise Liu
EMC Test Engineer

7 Test Setups


7.1 Radiated test setups Below 1GHz

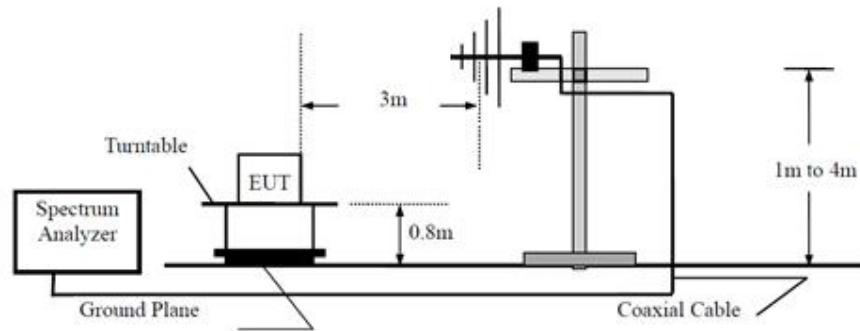


7.2 Radiated test setups Above 1GHz

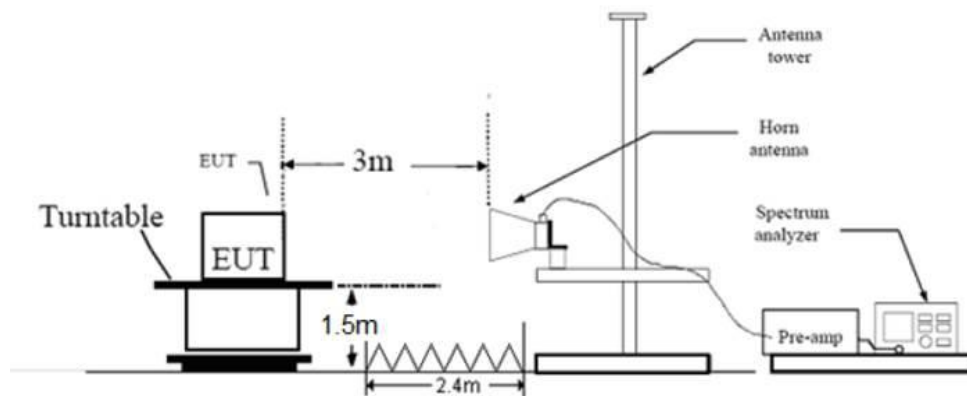

7.3 AC Power Line Conducted Emission test setups

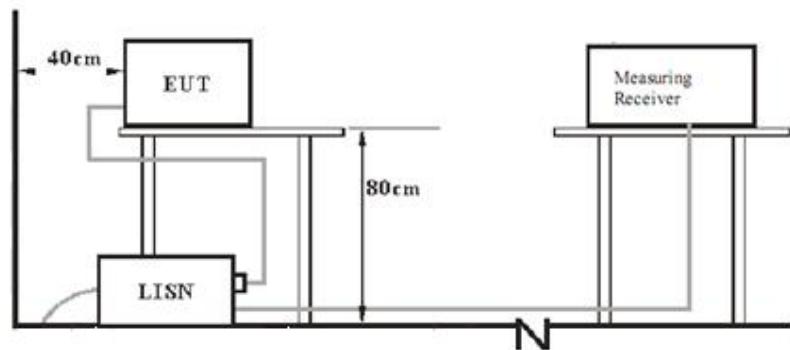

7.4 Conducted RF test setups

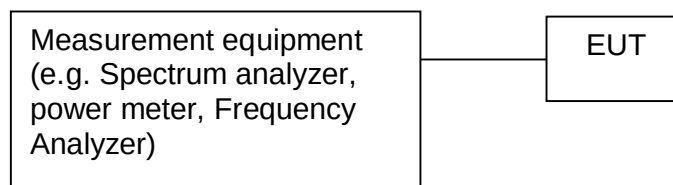

8 Emission Test Results

8.1 Spurious Radiated Emission

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode, 2Mbps Mode
 (Middle channel is the worst case)
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 3.7V DC
 Remark: Below 1GHz

Test Result

☒ Passed☐ Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector PK/QP/AV	Ant. Polarity H/V	Corr. (dB)
48.430000	18.62	40.00	21.38	Peak	H	15.22
99.415625	16.64	43.50	26.86	Peak	H	13.07
202.781250	18.13	43.50	25.37	Peak	H	13.31
309.420625	21.31	46.00	24.69	Peak	H	15.86
442.128750	25.05	46.00	20.95	Peak	H	19.17
702.452500	29.78	46.00	16.22	Peak	H	23.86
35.880625	20.76	40.00	19.24	Peak	V	12.73
56.371875	19.57	40.00	20.43	Peak	V	14.74
76.863125	23.50	40.00	16.50	Peak	V	9.22
199.871250	20.61	43.50	22.89	Peak	V	13.32
392.052500	22.72	46.00	23.28	Peak	V	18.17
948.590000	35.03	46.00	10.97	Peak	V	27.36

Remark:

- As the measured peak value not exceeded the Quasi-peak limit, Quasi-peak value no need to be measured.
- Result Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)
- No obvious difference between 1Mbps mode data and 2Mbps mode data, therefore we shown here 2Mbps mode data.

Spurious Radiated Emission

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 2Mbps Mode
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 3.7V DC
 Remark: 1GHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector PK/QP/AV	Ant. Polarity H/V	Corr. (dB)
2330.000000	45.12	74.00	28.88	Peak	H	-2.09
3268.000000	45.71	74.00	28.29	Peak	H	0.38
4272.500000	48.48	74.00	25.52	Peak	H	3.22
7903.500000	42.26	74.00	31.74	Peak	H	7.88
9867.000000	44.29	74.00	29.71	Peak	H	11.35
12012.000000	46.21	74.00	27.79	Peak	H	10.30
1824.000000	45.45	74.00	28.55	Peak	V	-4.69
2976.500000	44.84	74.00	29.16	Peak	V	-0.11
4520.000000	46.73	74.00	27.27	Peak	V	3.38
7205.500000	45.12	74.00	28.88	Peak	V	6.80
10409.500000	44.75	74.00	29.25	Peak	V	10.44
14598.000000	45.40	74.00	28.60	Peak	V	13.08

Remark:

1. According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
2. Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)
3. No obvious difference between 1Mbps mode data and 2Mbps mode data, therefore we shown here 2Mbps mode data.

Spurious Radiated Emission

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 2Mbps Mode
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 3.7V DC
 Remark: 1GHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector PK/QP/AV	Ant. Polarity H/V	Corr. (dB)
1428.000000	40.89	74.00	33.11	Peak	H	-8.03
2376.500000	44.99	74.00	29.01	Peak	H	-2.11
4294.000000	47.76	74.00	26.24	Peak	H	3.18
7319.000000	41.69	74.00	32.31	Peak	H	7.04
12199.000000	49.30	74.00	24.70	Peak	H	10.20
15964.000000	48.63	74.00	25.37	Peak	H	16.08
3534.500000	46.66	74.00	27.34	Peak	V	0.55
4420.000000	48.41	74.00	25.59	Peak	V	3.26
5225.500000	49.09	74.00	24.91	Peak	V	4.91
7319.000000	43.87	74.00	30.13	Peak	V	7.04
12201.500000	45.38	74.00	28.62	Peak	V	10.21
15916.000000	49.09	74.00	24.91	Peak	V	15.83

Remark:

1. According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
2. Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)
3. No obvious difference between 1Mbps mode data and 2Mbps mode data, therefore we shown here 2Mbps mode data

Spurious Radiated Emission

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2480MHz), 2Mbps Mode
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 3.7V DC
 Remark: 1GHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency	Result	Limit	Margin	Detector	Ant. Polarity	Corr.
MHz	dBμV/m	dBμV/m	dB	PK/QP/AV	H/V	(dB)
2257.000000	43.97	74.00	30.03	Peak	H	-2.54
3078.500000	45.88	74.00	28.12	Peak	H	0.17
5278.500000	48.94	74.00	25.06	Peak	H	4.93
9892.000000	45.22	74.00	28.78	Peak	H	10.88
12402.000000	52.02	74.00	21.98	Peak	H	10.43
12402.000000	51.35	54.00	2.65	Average	H	10.43
15948.000000	48.58	74.00	25.42	Peak	H	16.00
1994.500000	46.10	74.00	27.90	Peak	V	-3.25
2620.500000	44.25	74.00	29.75	Peak	V	-1.32
3638.000000	46.94	74.00	27.06	Peak	V	0.68
7439.500000	46.45	74.00	27.55	Peak	V	7.22
9855.500000	43.87	74.00	30.13	Peak	V	11.37
12958.000000	44.30	74.00	29.70	Peak	V	11.31


Remark:

1. According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
2. Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)
3. No obvious difference between 1Mbps mode data and 2Mbps mode data, therefore we shown here 2Mbps mode data

8.2 Conducted Emission at AC Power line

EUT: QTM-UAR10
 Op Condition: Charging mode
 Test Specification: FCC15.207, AC Mains, L Line
 Comment: 120V AC, 60Hz (supporting adapter input)

Test Result
☒ Passed
☐ Not Passed

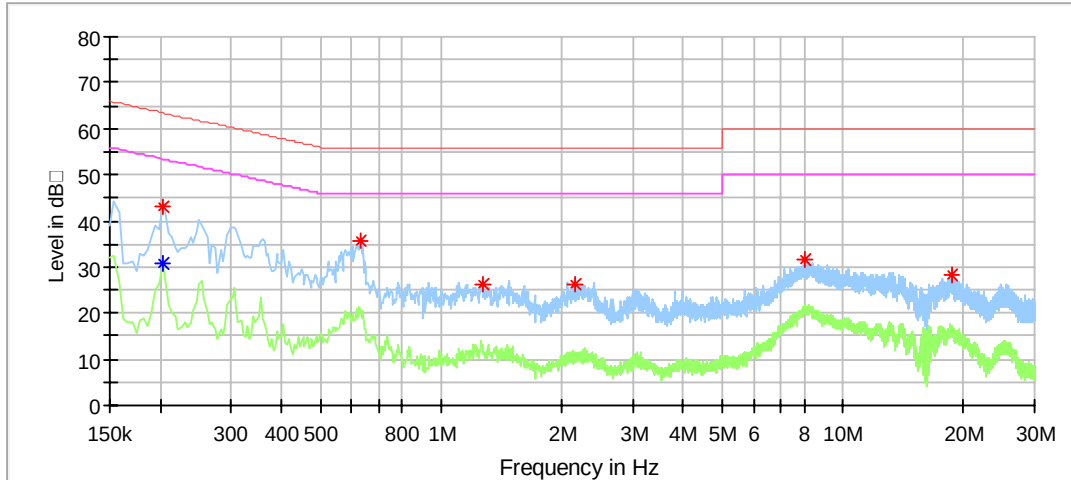

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)
0.202000	42.99	---	63.53	20.54	9.64
0.202000	---	30.90	53.53	22.63	9.64
0.630000	35.52	---	56.00	20.48	9.65
1.266000	26.37	---	56.00	29.63	9.66
2.146000	26.16	---	56.00	29.84	9.69
8.030000	31.55	---	60.00	28.45	9.85
18.586000	28.30	---	60.00	31.70	9.98


Conducted Emission Test

EUT: QTM-UAR10
 Op Condition: Charging mode
 Test Specification: FCC15.207, AC Mains, N Line
 Comment: 120V AC, 60Hz (supporting adapter input)

Test Result

☒ Passed

☐ Not Passed

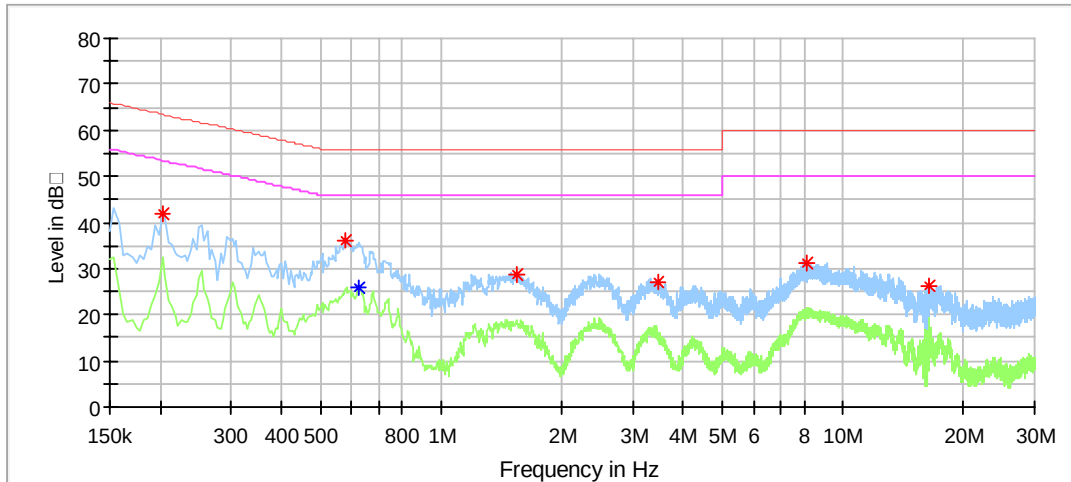


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)
0.202000	41.74	---	63.53	21.79	9.63
0.578000	36.21	---	56.00	19.79	9.65
0.626000	---	26.05	46.00	19.95	9.65
1.538000	28.79	---	56.00	27.21	9.67
3.462000	26.89	---	56.00	29.11	9.71
8.150000	30.99	---	60.00	29.01	9.84
16.458000	26.40	---	60.00	33.60	9.93


8.3 6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

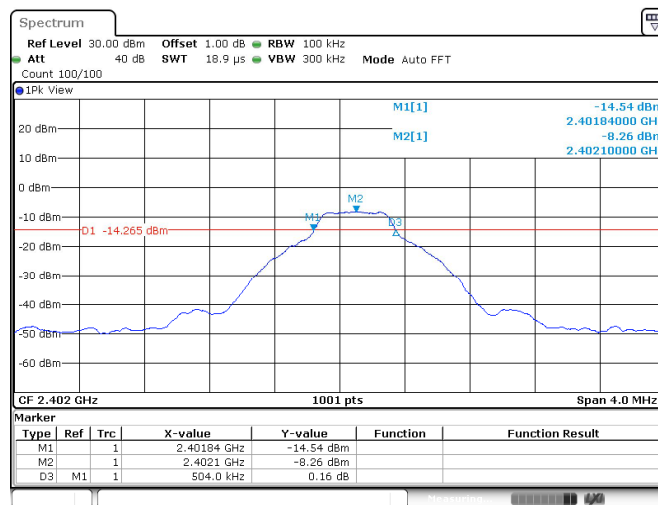

Date: 16.JUL 2021 15:02:07

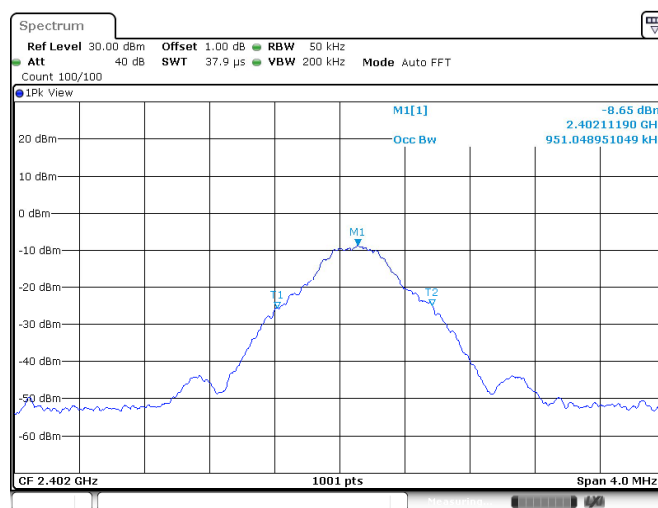


Date: 16.JUL 2021 15:02:18

Bandwidth	Measured Value	Limit
6dB bandwidth	0.504 MHz	> 0.5MHz
99% OCB	0.951 MHz	NA


6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 1Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

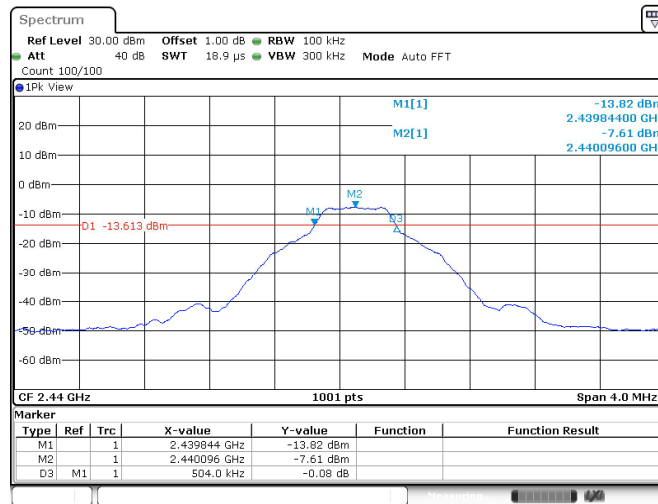

Date: 16 JUL 2021 15:04:41

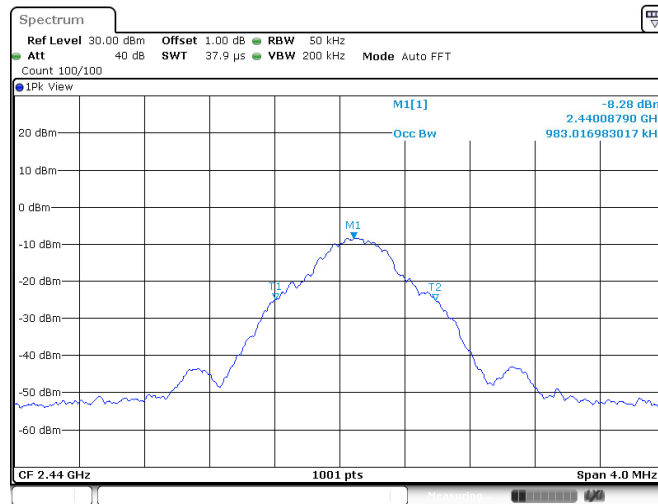



Date: 16 JUL 2021 15:04:52

Bandwidth	Measured Value	Limit
6dB bandwidth	0.504 MHz	> 0.5 MHz
99% OCB	0.983 MHz	NA

6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

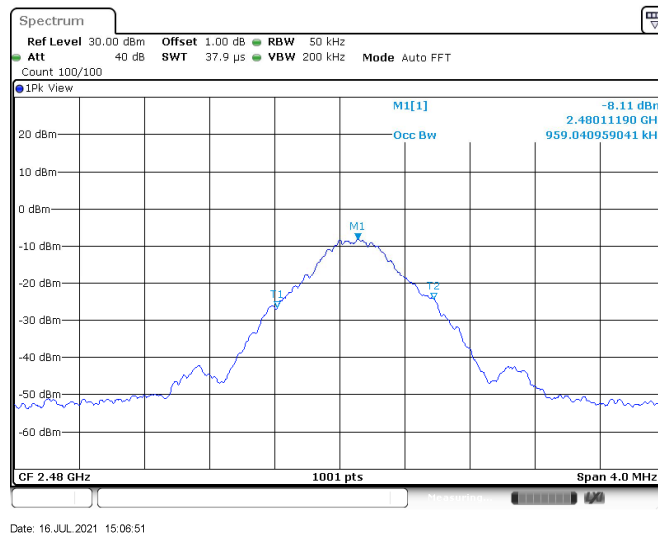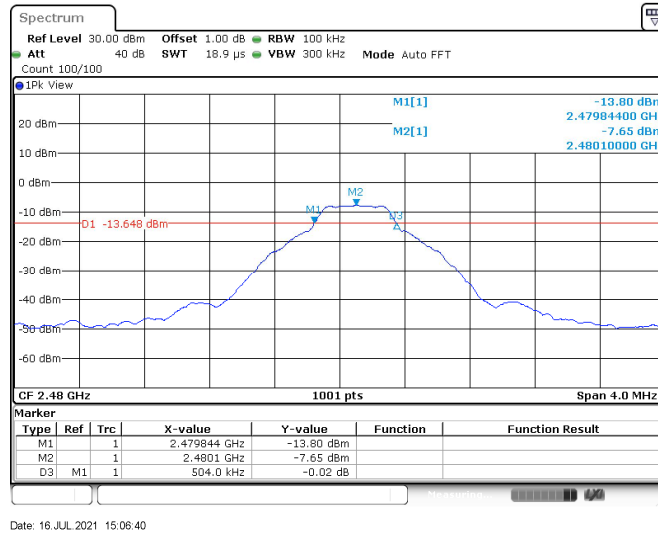


Bandwidth	Measured Value	Limit
6dB bandwidth	0.504 MHz	> 0.5 MHz
99% OCB	0.959 MHz	NA


6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

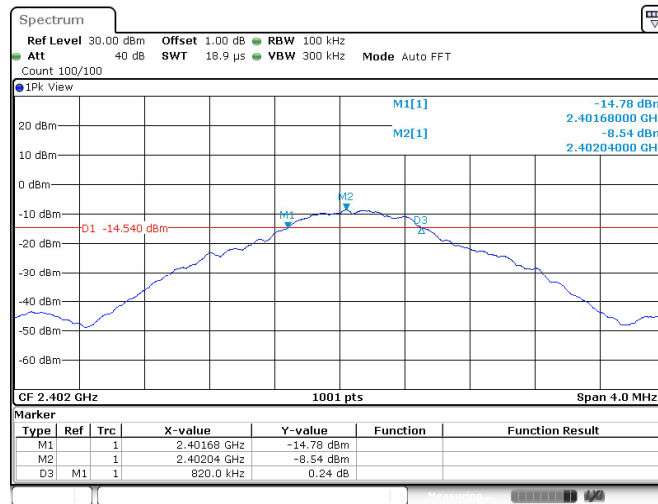

Date: 16 JUL 2021 15:12:34

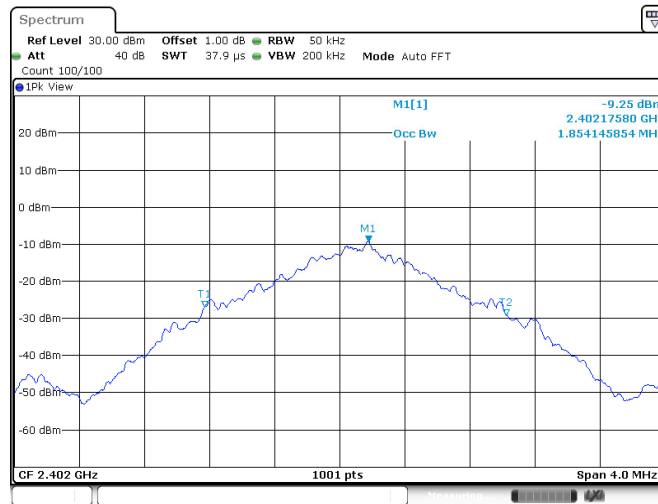


Date: 16 JUL 2021 15:12:45

Bandwidth	Measured Value	Limit
6dB bandwidth	0.820 MHz	> 0.5 MHz
99% OCB	1.854 MHz	NA


6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 2Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

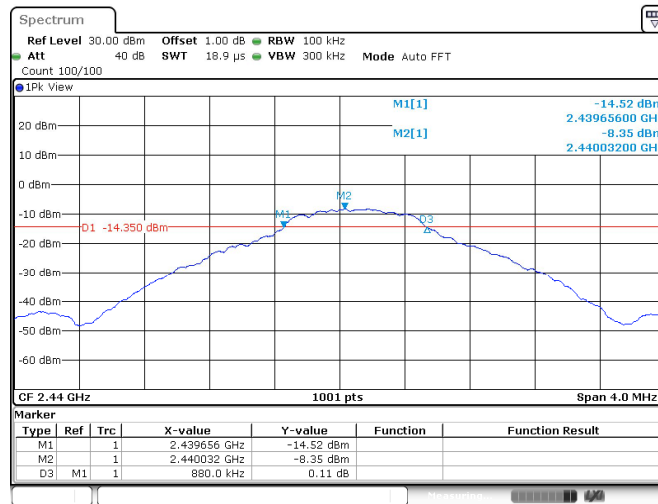

Date: 16 JUL 2021 15:14:14

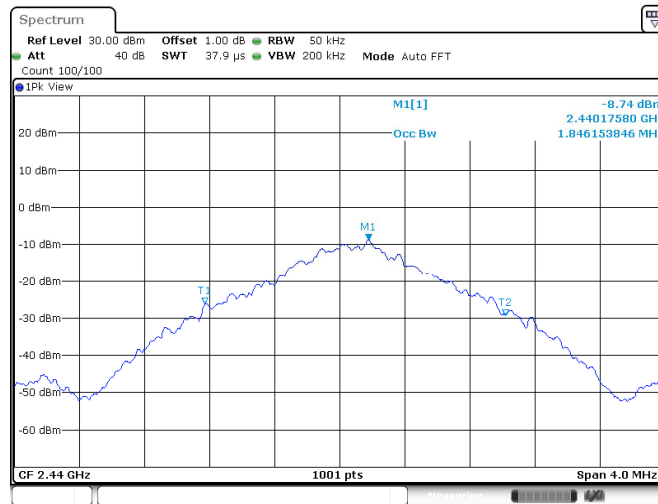


Date: 16 JUL 2021 15:14:25

Bandwidth	Measured Value	Limit
6dB bandwidth	0.880 MHz	> 0.5 MHz
99% OCB	1.846 MHz	NA


6dB & 99% Bandwidth

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2480MHz), 2Mbps mode
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

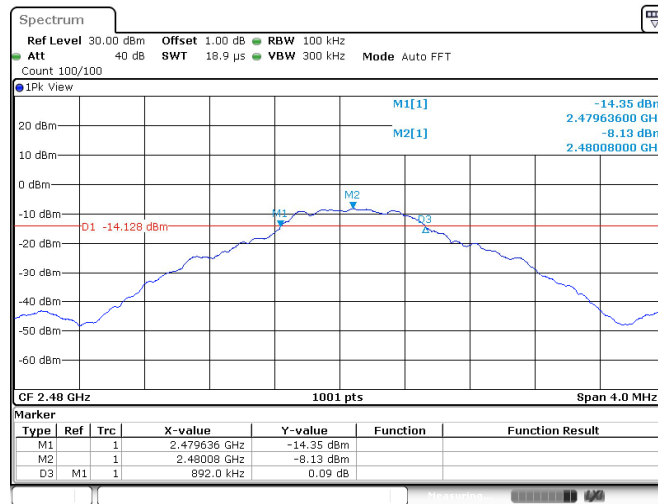

Date: 16 JUL 2021 15:15:40

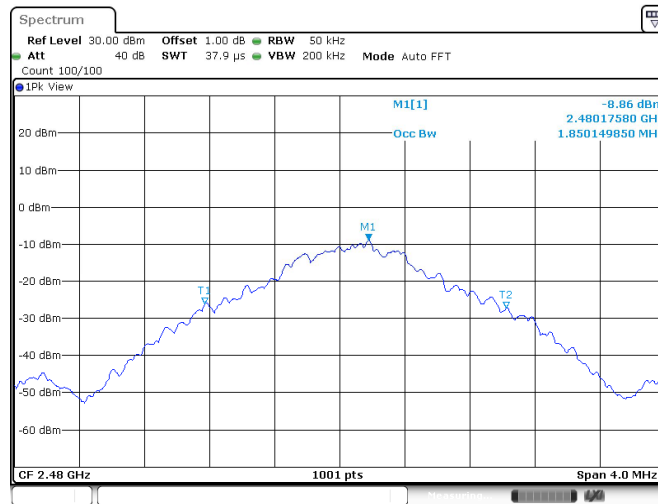


Date: 16 JUL 2021 15:15:50

Bandwidth	Measured Value	Limit
6dB bandwidth	0.892 MHz	> 0.5 MHz
99% OCB	1.850 MHz	NA

8.4 Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

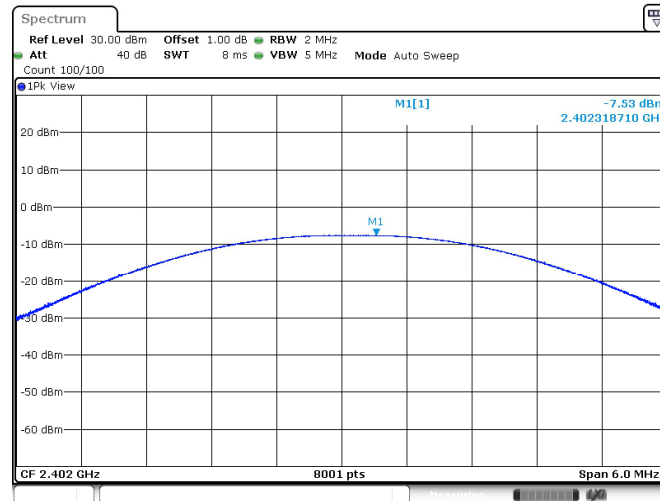


Conducted Output Power	Limit
-7.53 dBm	< 30dBm

Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2440MHz), 1Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

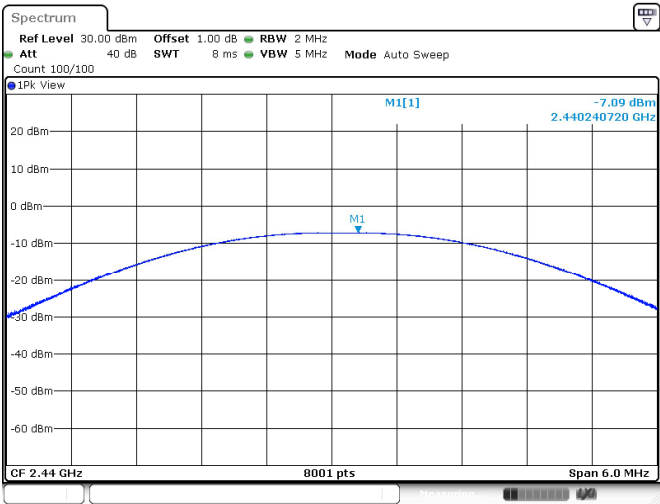


Date: 16 JUL 2021 15:04:58

Conducted Output Power	Limit
-7.07 dBm	< 30dBm

Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

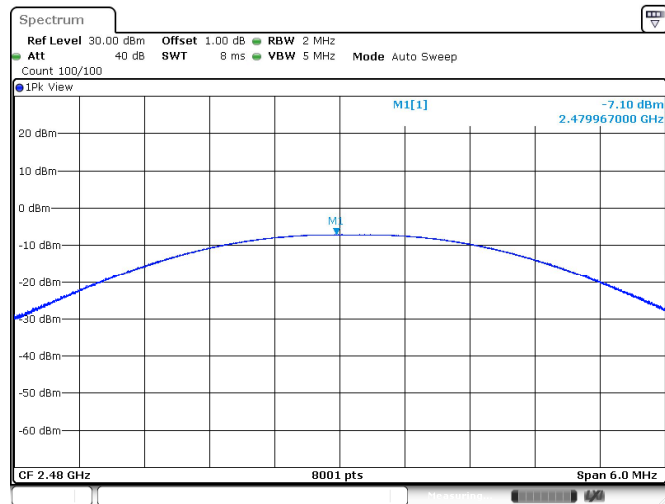


Date: 16 JUL 2021 15:06:57

Conducted Output Power	Limit
-7.10 dBm	< 30dBm

Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

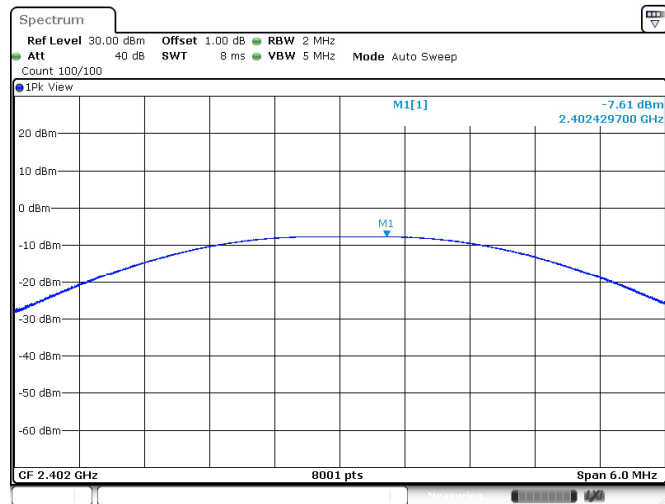


Date: 16.JUL.2021 15:12:51

Conducted Output Power	Limit
-7.61 dBm	< 30dBm

Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2440MHz), 2Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

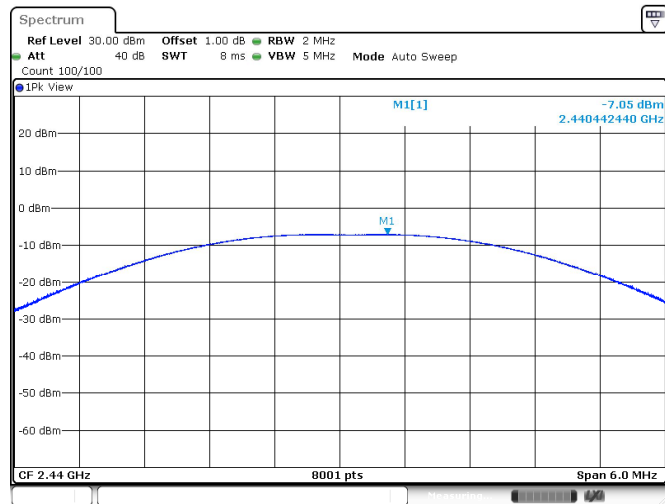


Date: 16 JUL 2021 15:14:31

Conducted Output Power	Limit
-7.05 dBm	< 30dBm

Peak Output Power

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 2Mbps mode
Test Specification: FCC15.247(b)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

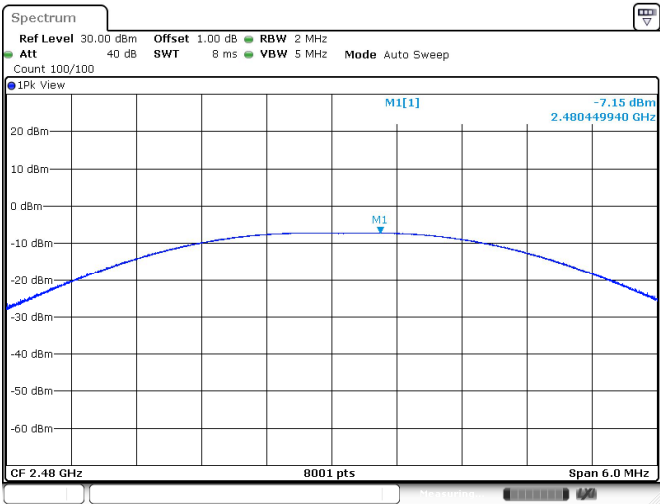

Date: 16 JUL 2021 15:15:57


Conducted Output Power	Limit
-7.15 dBm	< 30dBm

8.5 Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 3.7V DC

Test Result	
☒	Passed
☐	Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2402	2402	-8.36	-8.36	---	PASS
2402	30~1000	-8.36	-47.81	<=-28.36	PASS
2402	1000~26500	-8.36	-52.19	<=-28.36	PASS

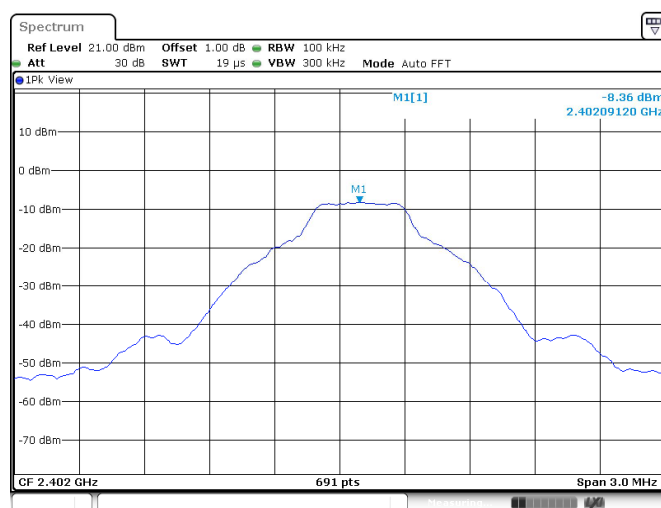


Date: 16 JUL 2021 15:02:45


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

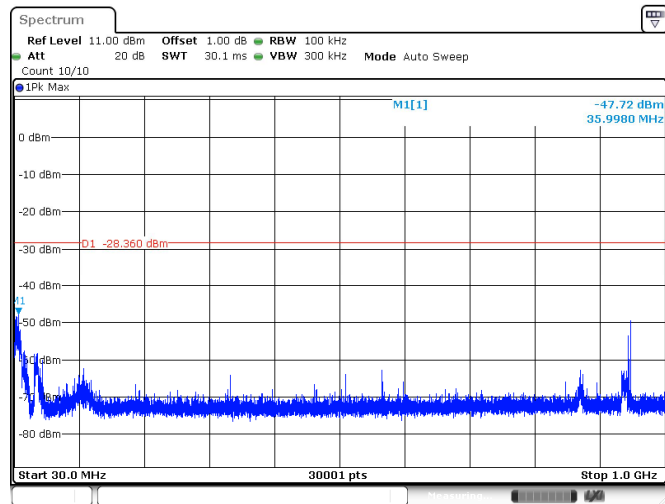

Date: 16 JUL 2021 15:02:51

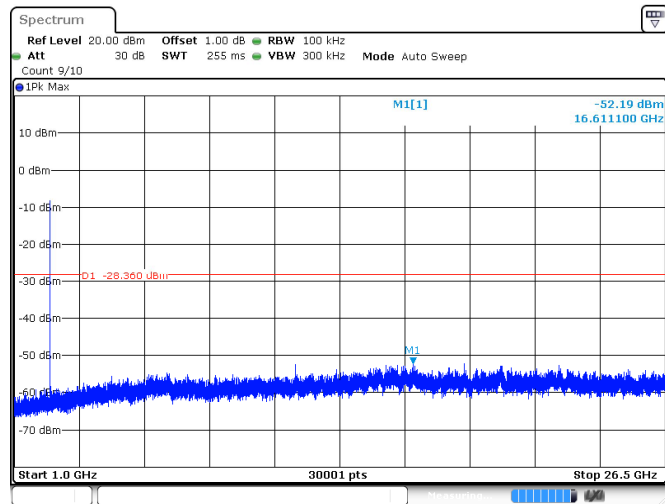


Date: 16 JUL 2021 15:02:59

Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 1Mbps mode
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2440	2440	-7.49	-7.49	---	PASS
2440	30~1000	-7.49	-48.24	<=-27.49	PASS
2440	1000~26500	-7.49	-51.00	<=-27.49	PASS

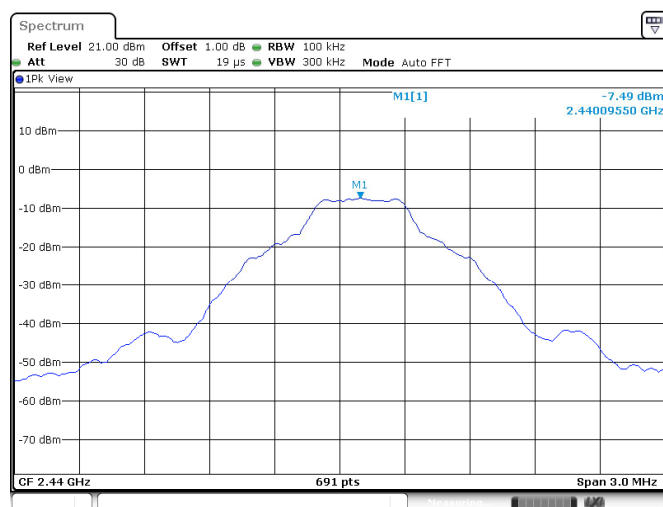


Date: 16.JUL.2021 15:05:09


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2440MHz), 1Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

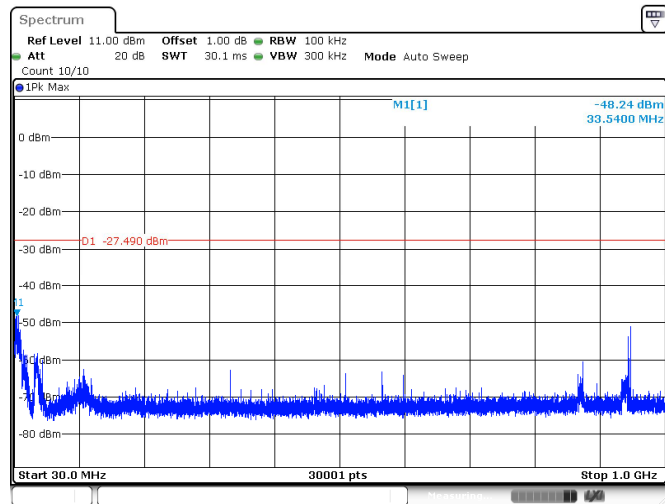

Date: 16 JUL 2021 15:05:15

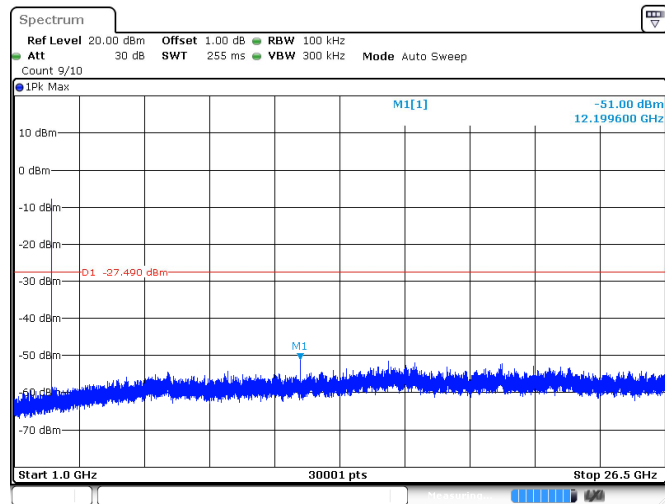


Date: 16 JUL 2021 15:05:23

Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2480	2480	-7.82	-7.82	---	PASS
2480	30~1000	-7.82	-47.68	<=-27.82	PASS
2480	1000~26500	-7.82	-51.67	<=-27.82	PASS

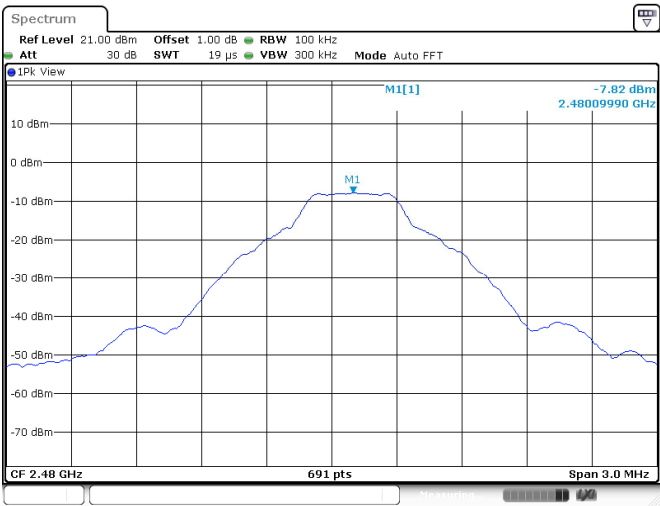


Date: 16 JUL 2021 15:07:17


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

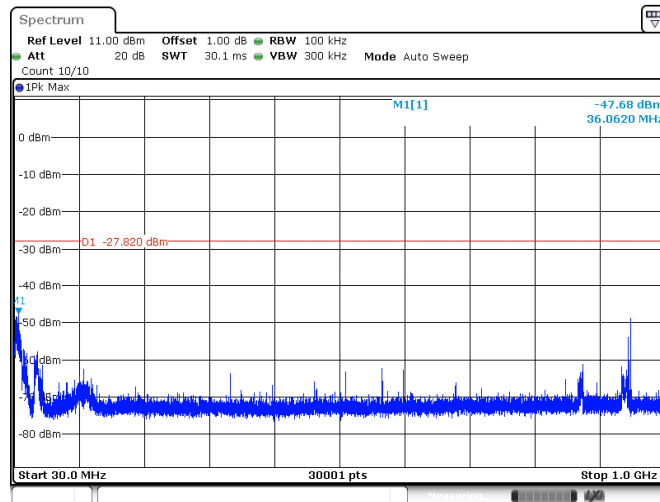

Date: 16 JUL 2021 15:07:23

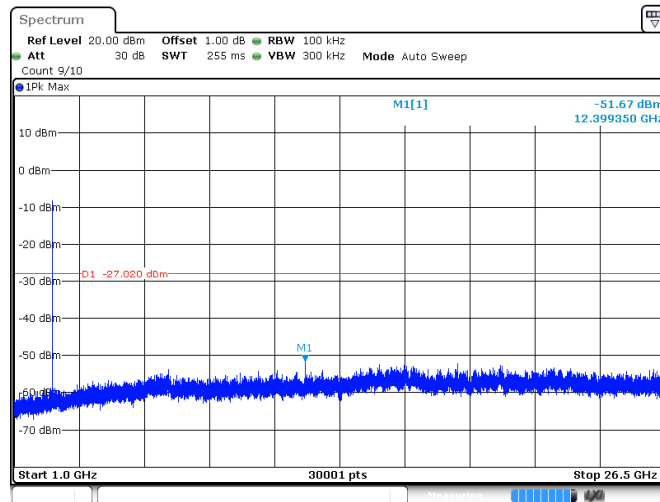


Date: 16 JUL 2021 15:07:31

Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2402	2402	-8.60	-8.60	---	PASS
2402	30~1000	-8.60	-48.03	<=-28.6	PASS
2402	1000~26500	-8.60	-43.84	<=-28.6	PASS

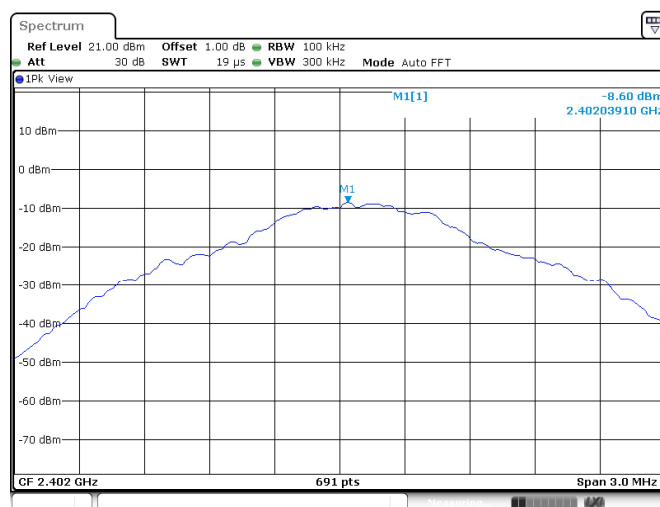


Date: 16.JUL.2021 15:13:11


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

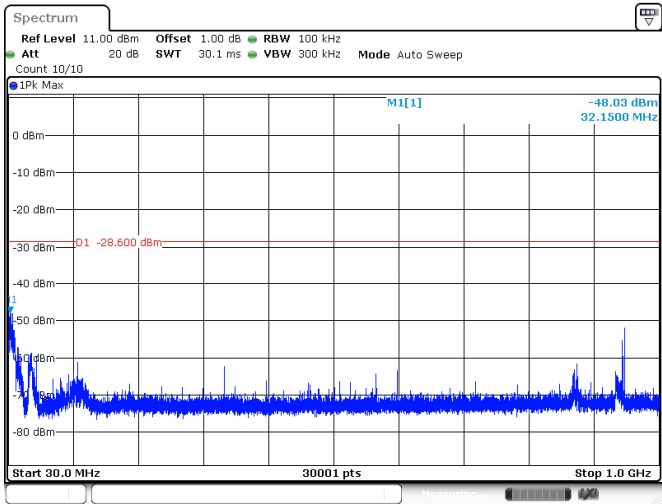

Date: 16 JUL 2021 15:13:17

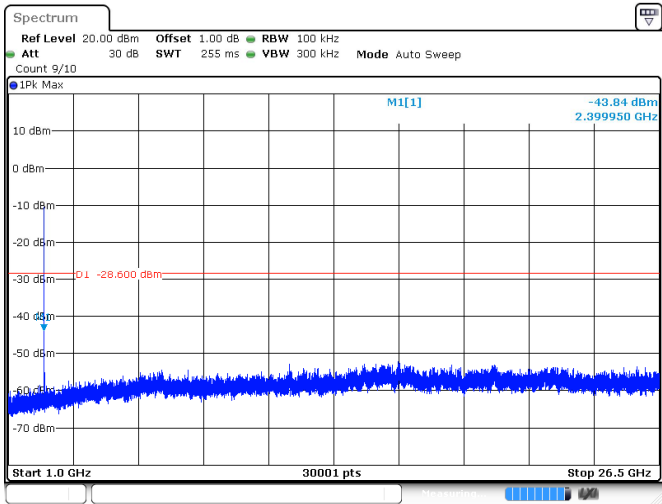


Date: 16 JUL 2021 15:13:25

Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 2Mbps mode
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2440	2440	-8.28	-8.28	---	PASS
2440	30~1000	-8.28	-47.69	<=-28.28	PASS
2440	1000~26500	-8.28	-52.01	<=-28.28	PASS

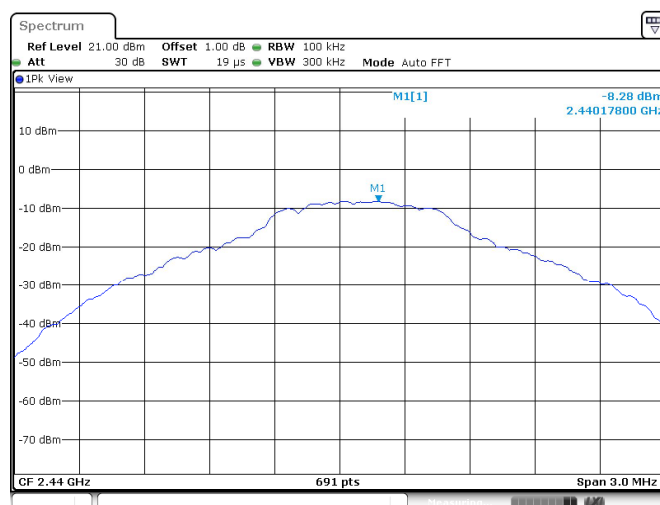


Date: 16.JUL.2021 15:14:42


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2440MHz), 2Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

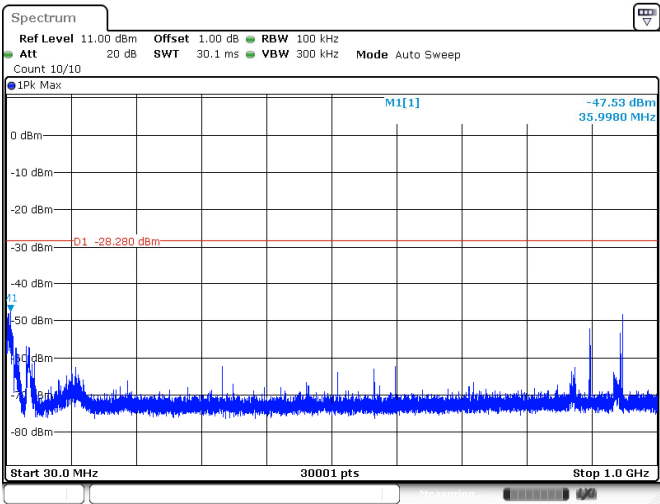

Date: 16 JUL 2021 15:14:48

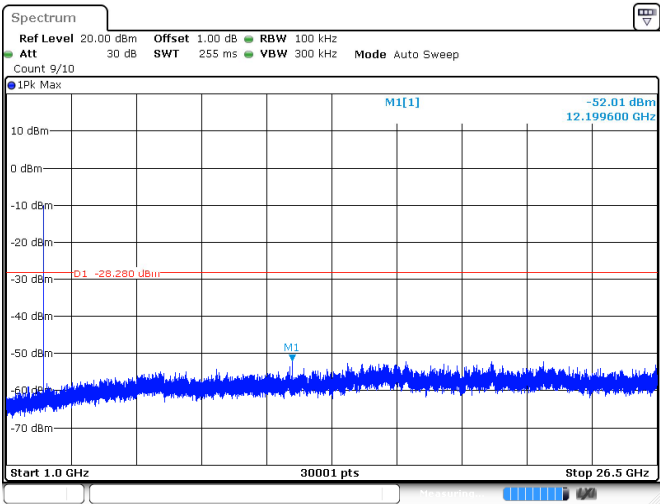


Date: 16 JUL 2021 15:14:56

Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (24480MHz), 2Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

Channel	FreqRange MHz	RefLevel dBm	Result dBm	Limit dBm	Verdict
2480	2480	-8.29	-8.29	---	PASS
2480	30~1000	-8.29	-38.93	<=-28.29	PASS
2480	1000~26500	-8.29	-52.1	<=-28.29	PASS

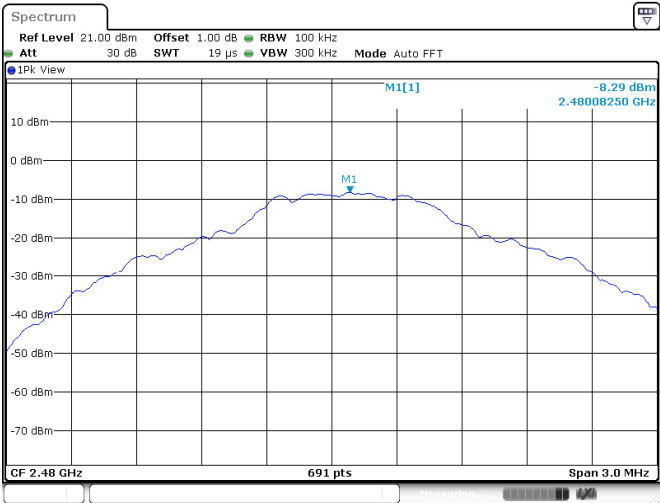


Date: 16.JUL.2021 15:16:17


Spurious Emissions at Antenna Terminals

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
Test Specification: FCC2.1051 & 15.247(d)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

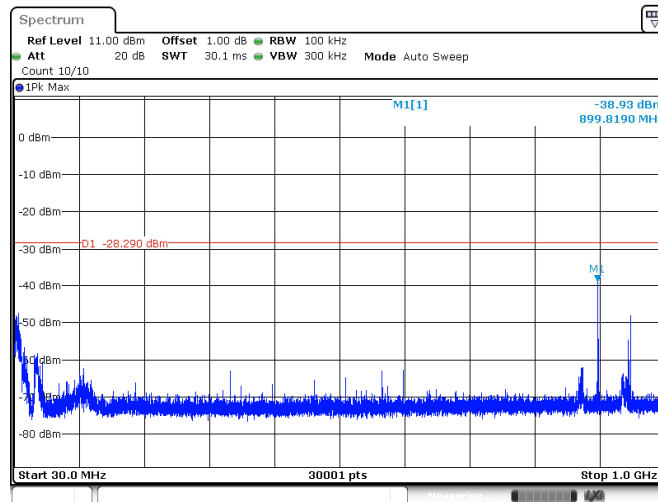

Date: 16 JUL 2021 15:16:23

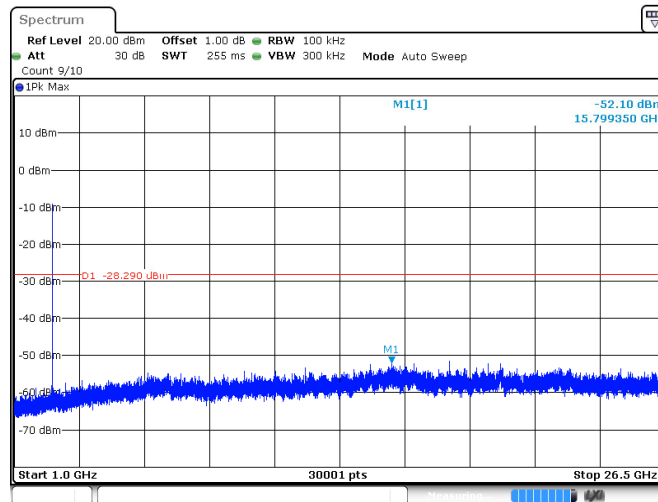


Date: 16 JUL 2021 15:16:31

8.6 100kHz Bandwidth of band edges

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
 Test Specification: FCC15.247(d), Conducted
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

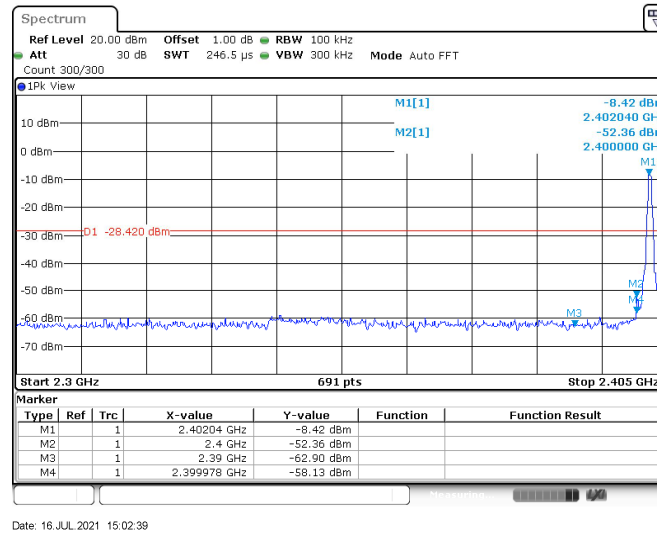


Band edges	Limit
43.94 dB	> 20dB

100kHz Bandwidth of band edges

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
Test Specification: FCC15.247(d), Conducted
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

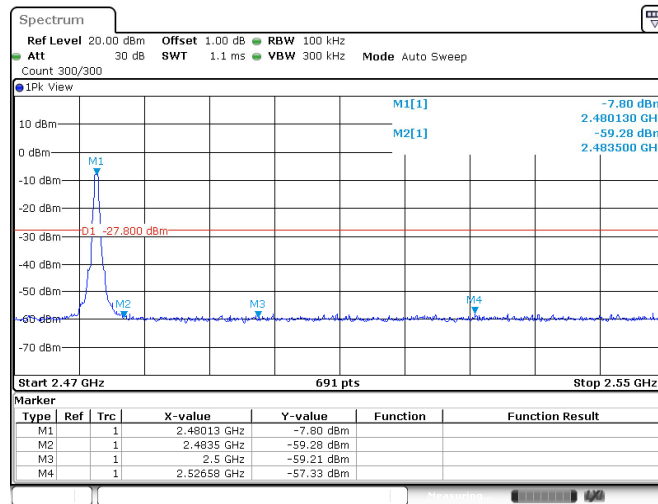


Date: 16 JUL 2021 15:07:12

Band edges	Limit
51.48 dB	> 20dB

100kHz Bandwidth of band edges

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
 Test Specification: FCC15.247(d), Conducted
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

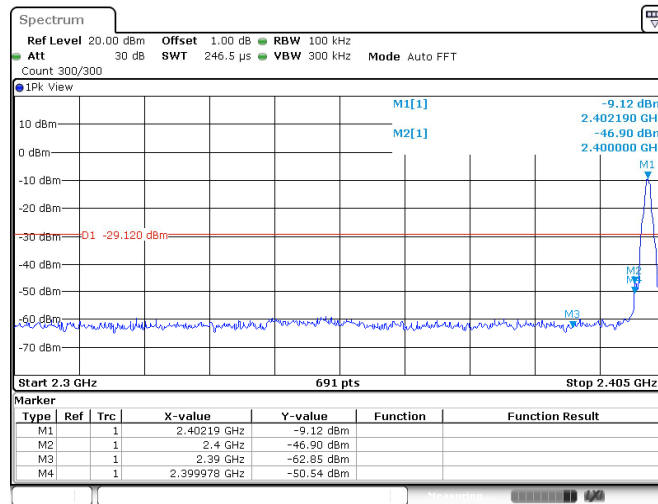


Date: 16 JUL 2021 15:13:06

Band edges	Limit
37.78 dB	> 20dB

100kHz Bandwidth of band edges

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2480MHz), 2Mbps mode
 Test Specification: FCC15.247(d), Conducted
 Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

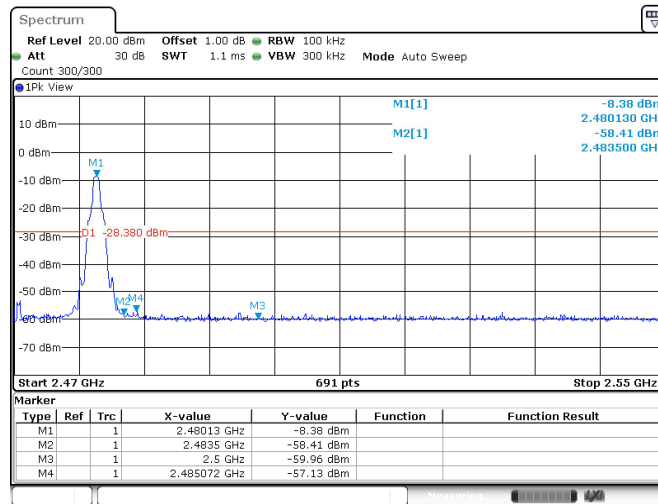


Date: 16 JUL 2021 15:16:11

Band edges	Limit
50.03 dB	> 20dB

8.7 Power Spectral Density

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 1Mbps mode
Test Specification: FCC15.247(e)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

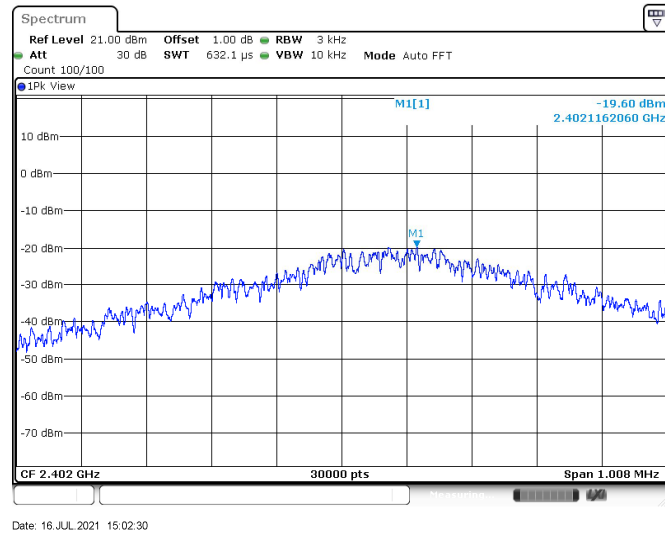


PSD	Limit
-19.60 dBm/3kHz	< 8 dBm/3kHz

Power Spectral Density

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 1Mbps mode
 Test Specification: FCC15.247(e)
 Comment: 3.7V DC

Test Result	
☒	Passed
☐	Not Passed

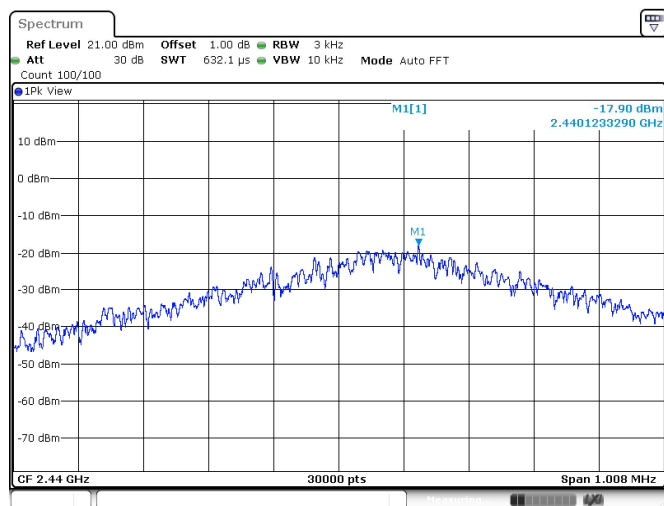


Date: 16 JUL 2021 15:05:04

PSD	Limit
-17.9 dBm/3kHz	< 8 dBm/3kHz

Power Spectral Density

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2480MHz), 1Mbps mode
 Test Specification: FCC15.247(e)
 Comment: 3.7V DC

Test Result	
☒	Passed
☐	Not Passed

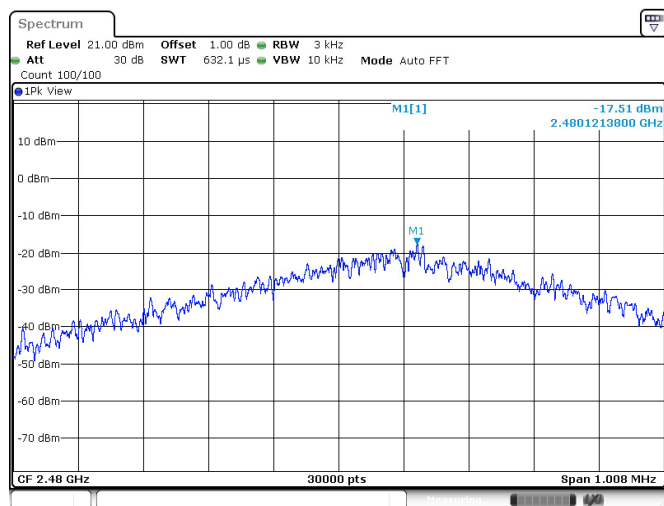


Date: 16 JUL 2021 15:07:03

PSD	Limit
-17.51 dBm/3kHz	< 8 dBm/3kHz

Power Spectral Density

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2402MHz), 2Mbps mode
Test Specification: FCC15.247(e)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

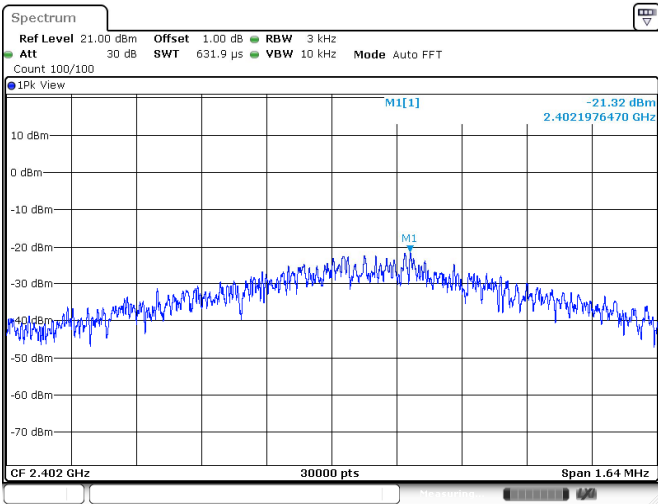


Date: 16 JUL 2021 15:12:57

PSD	Limit
-21.32 dBm/3kHz	< 8 dBm/3kHz

Power Spectral Density

EUT: QTM-UAR10
 Op Condition: Operated, TX Mode (2440MHz), 2Mbps mode
 Test Specification: FCC15.247(e)
 Comment: 3.7V DC

Test Result	
☒	Passed
☐	Not Passed

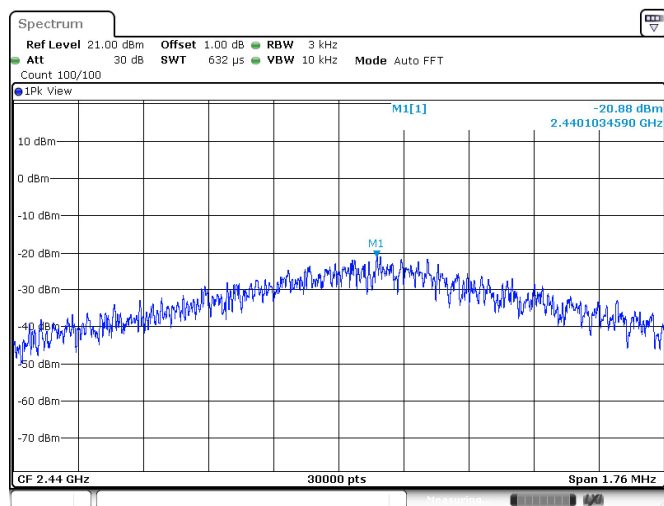


Date: 16 JUL 2021 15:14:37

PSD	Limit
-20.88 dBm/3kHz	< 8 dBm/3kHz

Power Spectral Density

EUT: QTM-UAR10
Op Condition: Operated, TX Mode (2480MHz), 2Mbps mode
Test Specification: FCC15.247(e)
Comment: 3.7V DC

Test Result
☒ Passed
☐ Not Passed

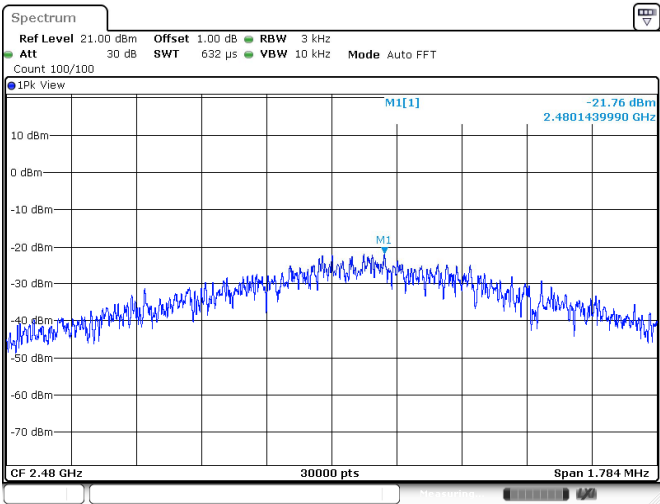

Date: 16 JUL 2021 15:16:02

PSD	Limit
-21.76 dBm/3kHz	< 8 dBm/3kHz

8.8 Antenna Requirement

EUT: QTM-UAR10
Op Condition: Operated, TX Mode
Test Specification: FCC15.203 & 15.247(b)
Comment: 3.7V DC

Test Result	
☒	Passed
☐	Not Passed

Limit

For intentional device, according to FCC Title 47 Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC Title 47 Part 15.247(b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The antenna used in this product is a ceramic chip antenna welded on PCB, and the maximum gain of this antenna is 5.46 dBi.

9 Test setup procedure

9.1 Spurious Radiated Emission

Test Method

1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.

3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector

function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) $VBW \leq [3 \times RBW]$.

c) Detector = RMS (power averaging), if $[span / (\# \text{ of points in sweep})] \leq RBW / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section RSS-GEN 8.10, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBuV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

9.2 Conducted Emission at AC Power line

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Remark: “*” Decreasing linearly with logarithm of the frequency

9.3 6dB & 99% Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]

≥ 500

9.4 Peak Output Power

Test Method

1. Connect the spectrum analyzer to the EUT
 - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - b) At all times the EUT is transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Limits

According to §15.247 (b) (1) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

For e.i r.p:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 30

9.5 Spurious Emissions at Antenna Terminals

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

9.6 100kHz Bandwidth of band edges

Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

9.7 Power Spectral Density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3KHz]

≤ 8

10 Appendix A - General Product Information

Radiofrequency radiation exposure evaluation

This exposure evaluation is intended for **FCC ID: 2AX6LQTMUR10**

According to KDB 447498 D01v06 section 4.3.1, For frequencies between 100 MHz to 6GHz and test separation distances ≤ 50 mm, the Numeric threshold is determined as:

Step a)

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

>> The fundamental frequency of the EUT is 2402-2480MHz,
the test separation distance is ≤ 50 mm.
(Here calculated it as the worst-case, define the distance is 5mm)

Step b)

>> Numeric threshold (2402MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.402\text{GHz}} \leq 3.0$
Numeric threshold (2402MHz) $\leq 9.678\text{mW}$

>> Numeric threshold (2440MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.440\text{GHz}} \leq 3.0$
Numeric threshold (2440MHz) $\leq 9.602\text{mW}$

>> Numeric threshold (2480MHz), $\text{mW} / 5\text{mm} \cdot \sqrt{2.480\text{GHz}} \leq 3.0$
Numeric threshold (2480MHz) $\leq 9.525\text{mW}$

>> The power (measured + tune up tolerance) of EUT at 2402MHz is: $-7.53\text{dBm} = 0.177\text{mW}$
The power (measured + tune up tolerance) of EUT at 2440MHz is: $-7.05\text{dBm} = 0.197\text{mW}$
The power (measured + tune up tolerance) of EUT at 2480MHz is: $-7.10\text{dBm} = 0.195\text{mW}$

Which is smaller than the Numeric threshold.

Therefore, the device is exempt from stand-alone SAR test requirements.


Reviewed by:



Eric LI
EMC Project Manager



Prepared by:



Hosea CHAN
EMC Project Engineer

11 Appendix B - Declaration Letters

Declaration Letter of Model Difference

ZEROKEY
SPATIAL INTELLIGENCE

3120-12 St NE
Calgary, Alberta, Canada
T2E 8T3
PH: (403) 536-0775
Web: www.zerokey.com

To: TÜV SÜD Hong Kong Limited

Attention: Eric Li

From: Matthew Lowe

Fax No:

Project No.: 5503655

Date: November 25, 2021

Total Page (Cover Included): 1

Subject: Declaration letter of model difference

We: ZEROKEY INC.

3120 12TH ST NE, CALGARY ALBERTA, CANADA T2E 8T3

Officially notify TÜV SÜV Hong Kong Limited that the <<Model A>> have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with <<PRODUCT>>, <<Model B>>. The difference between them is showing in the following table.

<<Model A>>: QTM-UMR10, QTM-SMR10

<<Model B>>: QTM-UAR10

<<Product>>: Quantum RTLS Universal Anchor/Mobile/Tag

The following table show the details of the difference between these three models.

Model		Differences	Similarities
QTM-UAR10	Anchor unit	Universal node case with basic PCB population	All these three models use exactly the same PCB board with same components and component layout. QTM-UAR10 and QTM-UMR10 have same enclosure. QTM-SMR10 has a different enclosure.
QTM-UMR10	Mobile unit	Universal node case with added MEMS sensors	
QTM-SMR10	Clip-on Tag	Orange case with clip, vibrator and, beeper comparing with QTM-UAR10	

Applicant:

Matthew Lowe

November 25, 2021
(Date)



(Applicant's authorized signature and company Chop)