

**APPLICATION FOR VERIFICATION**  
On Behalf of  
Shenzhen Jihezaowu Technology Co., Ltd.

Wireless Charger  
Model No.: CW305, CW306, CW307

FCC ID: 2AX6N-CW305

Prepared for : Shenzhen Jihezaowu Technology Co., Ltd.  
Address : Room 208, Building 5, Nanke Chuangyuan Valley, Gaofeng  
Community, Dalang Street, Longhua District, Shenzhen

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science &  
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.  
China

Tel: +86-755-26503290  
Fax: +86-755-26503396

Report No. : RTZ201110004-RF  
Date of Test : Nov. 25, 2020 to Dec. 04, 2020  
Date of Report : Dec. 07, 2020

## TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. TEST RESULTS SUMMARY .....	4
2. GENERAL INFORMATION .....	5
2.1. Description of Device (EUT) .....	5
2.2. Special Accessory and Auxiliary Equipment .....	5
2.3. Description of Test Facility.....	6
2.4. Measurement Uncertainty.....	6
3. MEASURING DEVICE AND TEST EQUIPMENT .....	7
4. POWER LINE CONDUCTED MEASUREMENT .....	8
4.1. Block Diagram of Test Setup .....	8
4.2. Power Line Conducted Emission Measurement Limits .....	8
4.3. Configuration of EUT on Measurement.....	8
4.4. Operating Condition of EUT .....	8
4.5. Test Procedure .....	9
4.6. Data Sample.....	9
4.7. Power Line Conducted Emission Measurement Results.....	9
5. RADIATED EMISSION MEASUREMENT .....	12
5.1. Block Diagram of Test .....	12
5.2. Radiated Emission Limit (Class B) .....	13
5.3. EUT Configuration on Measurement .....	13
5.4. Operating Condition of EUT .....	13
5.5. Test Procedure .....	14
5.6. Data Sample.....	15
5.7. Radiated Emission Measurement Result .....	16
6. ANTENNA REQUIREMENT .....	19
6.1. The Requirement .....	19
6.2. Antenna Construction .....	19

## Test Report Declaration

Applicant : Shenzhen Jihezaowu Technology Co., Ltd.  
Address : Room 208, Building 5, Nanke Chuangyuan Valley, Gaofeng Community, Dalang Street, Longhua District, Shenzhen  
Manufacturer : Shenzhen Jihezaowu Technology Co., Ltd.  
Address : Room 208, Building 5, Nanke Chuangyuan Valley, Gaofeng Community, Dalang Street, Longhua District, Shenzhen  
Product : Wireless Charger  
Model No. : CW305, CW306, CW307  
Note:  
1. The difference between CW305 and CW306 is structural appearance and model name.  
2. The only difference between CW305 and CW307 is model name  
So just CW305 is tested.  
Trade name : n.a.

## Measurement Procedure Used:

**FCC CFR47 Part 15 Subpart C Section 15.205, 15.207 and 15.209  
ANSI C63.10: 2013**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : \_\_\_\_\_ Nov. 25, 2020 to Dec. 04, 2020  
Date of Report : \_\_\_\_\_ Dec. 07, 2020

Prepared by : \_\_\_\_\_  
(Black Ding, Engineer )

Approved & Authorized Signer : \_\_\_\_\_  
( Candy Li, RF Engineer )

## 1. TEST RESULTS SUMMARY

Test Items	Test Standard	Test Results
Power Line Conducted Emission	FCC Part 15.207	Pass
Radiated Emission	FCC Part 15.205, 15.209	Pass

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name	:	Wireless Charger
Frequency	:	110-205kHz
Modulation Type	:	ASK
Type of Antenna	:	Coil Antenna
Rating	:	DC 5V or 9V
Antenna Gain	:	0dBi

### 2.2. Special Accessory and Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
Unknown	Wireless Load	Unknown	WirelessLoad01
Unknown	Wireless Load	Unknown	WirelessLoad02
Unknown	Resistor	Unknown	Unknown
HUAWEI	Adapter	HW-059200CHQ	Unknown

### 2.3.Description of Test Facility

EMC Lab : Recognition of accreditation by Federal Communications Commission (FCC)  
The Designation Number is CN1189  
The Registration Number is 708358

Listed by Innovation, Science and Economic Development Canada (ISED)  
The Registration Number is 5077A-2

Accredited by China National Accreditation Service for Conformity Assessment (CNAS)  
The Registration Number is CNAS L3193

Accredited by American Association for Laboratory Accreditation (A2LA)  
The Certificate Number is 4297.01

Name of Firm : Shenzhen Accurate Technology Co., Ltd  
Site Location : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Subcontracted Items: Maximum Permissible Exposure(MPE)

Subcontractor: Bay Area Compliance Labs Corp.(Shenzhen)

Site Location: 6/F, the 3rd Phase of Wan Li Industrial Bldg., Shihua Rd., FuTian Free Trade Zone, Shenzhen, China

### 2.4.Measurement Uncertainty

Conducted emission expanded uncertainty :  $U=2.72\text{dB, } k=2$   
(Mains ports, 9kHz-30MHz)

Radiated emission expanded uncertainty :  $U=2.66\text{dB, } k=2$   
(9kHz-30MHz)

Radiated emission expanded uncertainty :  $U=4.28\text{dB, } k=2$   
(30MHz-1000MHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### Conducted Emissions Test/ RF Conducted Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	100307	Jan.04, 2020	1 Year
2.	L.I.S.N.	Schwarzbeck	NSLK8126	8126431	Jan.04, 2020	1 Year
3.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100305	Jan.04, 2020	1 Year
4.	50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283936	Jan.04, 2020	1 Year
5	RF Coaxial Cable	Schwarzbeck	N-2m	No.2	Jan. 04, 2020	1 Year

Conducted Emission Measurement Software: ES-K1 V1.71

#### Radiated Emissions Test


Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
Test Receiver	Rohde&Schwarz	ESR	101817	Jan. 04, 2020	Jan. 03, 2021
Pre-Amplifier	Agilent	8447D	294A10619	Jan. 04, 2020	Jan. 03, 2021
LOOP ANTENNA	SCHWARZBECK	FMZB1516	1516131	Jan. 05, 2020	Jan. 04, 2021
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 05, 2020	Jan. 04, 2021
RF Coaxial Cable	Schwarzbeck	N-5m	No.1	Jan. 04, 2020	Jan. 03, 2021
RF Coaxial Cable	Schwarzbeck	N-1m	No.6	Jan. 04, 2020	Jan. 03, 2021
RF Coaxial Cable	SUHNER	N-6m	No.10	Jan. 04, 2020	Jan. 03, 2021
RF Coaxial Cable	SUHNER	N-0.5m	No.15	Jan. 04, 2020	Jan. 03, 2021

Radiated Test Software: EZ\_EMCA V1.1.4.2

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## 4. POWER LINE CONDUCTED MEASUREMENT

### 4.1. Block Diagram of Test Setup

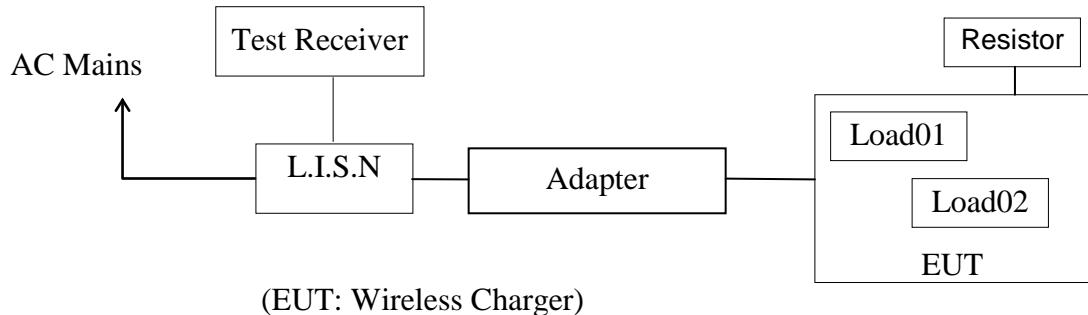

### 4.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in test mode and measure it.

#### 4.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 4.6. Data Sample

Frequency (MHz)	QuasiPeak Level (dB $\mu$ V)	Average Level (dB $\mu$ V)	Transducer value (dB)	QuasiPeak Result (dB $\mu$ V)	Average Result (dB $\mu$ V)	QuasiPeak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	29.4	18.3	11.1	40.5	29.4	56.0	56.0	15.5	16.6	Pass

Transducer value = Insertion loss of LISN + Cable Loss

Result = Quasi-peak Level/Average Level + Transducer value

Limit = Limit stated in standard

Calculation Formula:

Margin = Limit – Reading level value – Transducer value

#### 4.7. Power Line Conducted Emission Measurement Results

**PASS.**


Test Lab: Shielding room

The frequency range from 150kHz to 30MHz is checked.

Emissions attenuated more than 20 dB below the permissible value are not reported. Worst case (Full Load) was recorded in the report.

The spectral diagrams are attached as below.

EUT Operation mode: Full load (worst case)

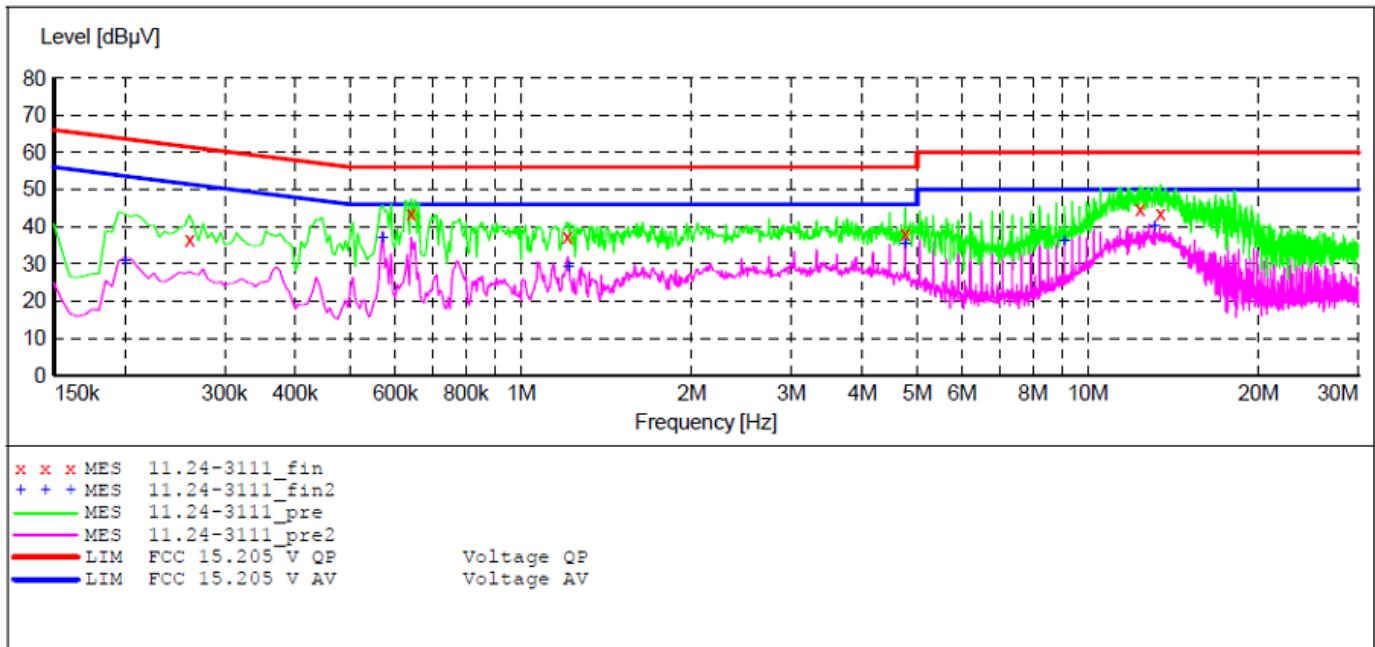**MEASUREMENT RESULT: "11.24-3111\_fin"**


11/25/2020 3:56PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.260000	36.40	10.4	61	25.6	QP	N	GND
0.640000	43.50	10.5	56	12.5	QP	N	GND
1.205000	37.20	10.6	56	18.8	QP	N	GND
4.760000	37.90	10.7	56	18.1	QP	N	GND
12.355000	44.60	10.8	60	15.4	QP	N	GND
13.435000	43.40	10.8	60	16.6	QP	N	GND

**MEASUREMENT RESULT: "11.24-3111\_fin2"**

11/25/2020 3:56PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.200000	30.80	10.4	54	23.1	AV	N	GND
0.570000	36.80	10.5	46	9.2	AV	N	GND
1.210000	28.90	10.6	46	17.1	AV	N	GND
4.760000	35.50	10.7	46	10.5	AV	N	GND
9.090000	36.00	10.8	50	14.0	AV	N	GND
13.120000	39.90	10.8	50	10.1	AV	N	GND

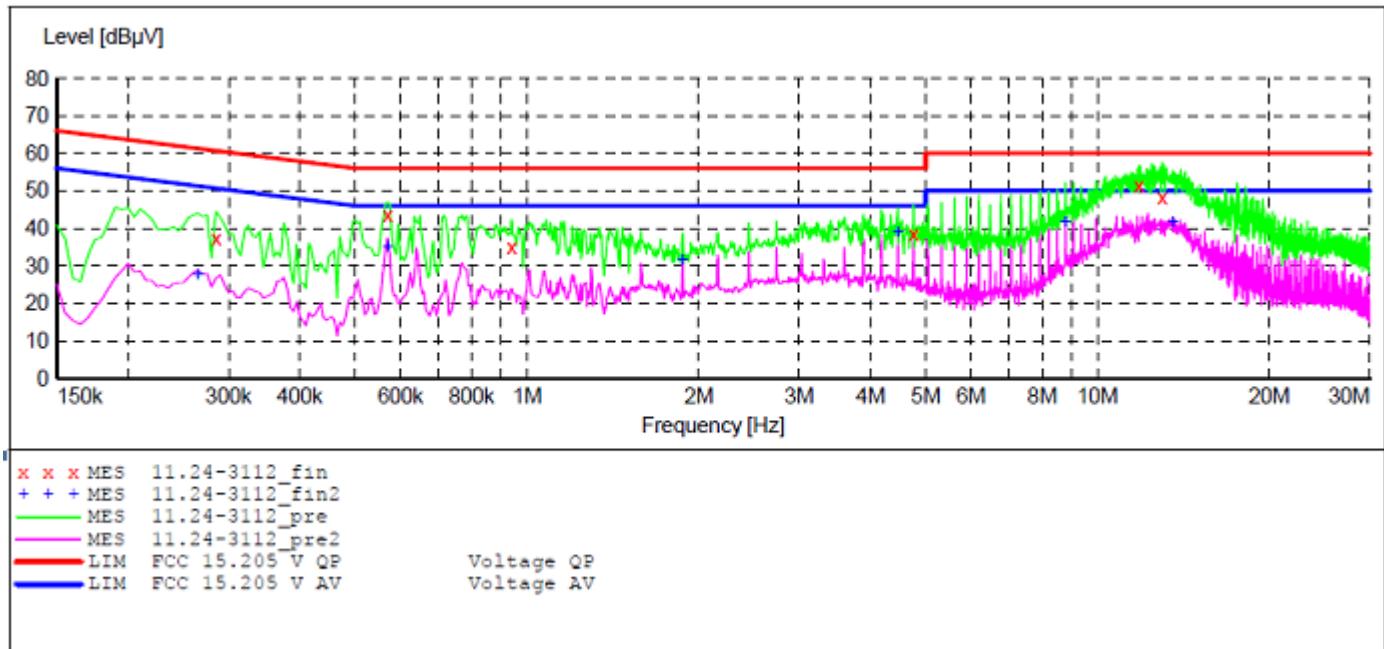

### MEASUREMENT RESULT: "11.24-3112\_fin"

11/25/2020 4:00PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.285000	37.40	10.5	61	23.6	QP	L1	GND
0.570000	43.50	10.5	56	12.5	QP	L1	GND
0.940000	34.90	10.6	56	21.1	QP	L1	GND
4.760000	38.50	10.7	56	17.5	QP	L1	GND
11.830000	51.20	10.8	60	8.8	QP	L1	GND
12.985000	48.10	10.8	60	11.9	QP	L1	GND

### MEASUREMENT RESULT: "11.24-3112\_fin2"


11/25/2020 4:00PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.265000	27.60	10.4	51	23.4	AV	L1	GND
0.570000	35.10	10.5	46	10.9	AV	L1	GND
1.875000	31.60	10.6	46	14.4	AV	L1	GND
4.470000	38.80	10.7	46	7.2	AV	L1	GND
8.790000	41.70	10.8	50	8.3	AV	L1	GND
13.540000	41.60	10.8	50	8.4	AV	L1	GND

## 5. RADIATED EMISSION MEASUREMENT


### 5.1. Block Diagram of Test

#### 5.1.1. Block diagram of connection between the EUT and simulators

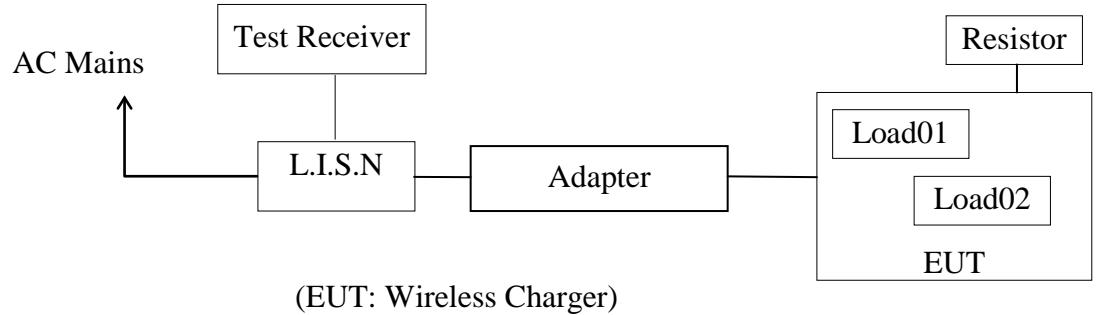


#### 5.1.2. Block diagram of test setup (In chamber)

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

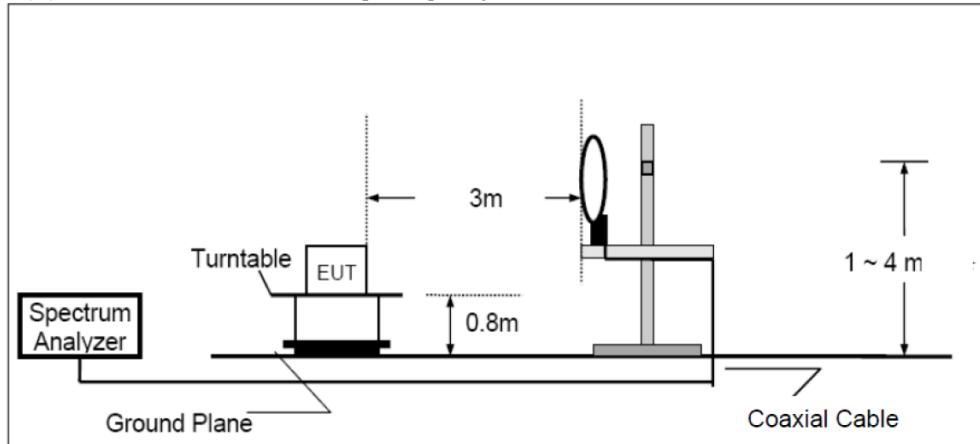

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

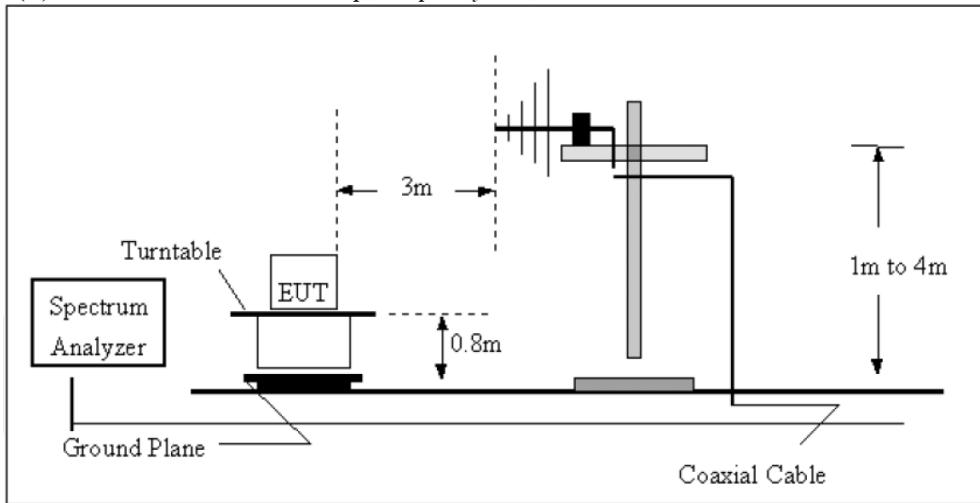

## 5.1.3.Radiated Emission Limit {FCC Part 15.209(a) }

Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

For Example:

Limit: [2400/125=19.2uV/m@300m](https://www.google.com/search?q=2400/125=19.2uV/m@300m)

Distance Correction Factor =  $40\log(\text{test distance}/\text{specific distance})$

## 5.2.EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 5.2.1.Wireless Charger (EUT)

Model Number : CW305

Manufacturer : Shenzhen Jihezaowu Technology Co., Ltd.

## 5.3.Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 5.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in test mode and measure it.

#### 5.4. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement.

From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

From 30MHz to 1000MHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector for the frequency bands 9kHz to 90kHz and 110 kHz to 490 kHz where an average detector will be used according to Section 15.209(d)(2).

The final level, expressed in dBuV/m, is arrived at by taking the reading from the EMI receiver(Level dBuV) and adding the antenna correction factor and cable loss factor(Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9kHz – 150kHz: ResBW: 200Hz

150kHz – 30MHz: ResBW: 9kHz

The bandwidth of the EMI test receiver is set at 120kHz from 30MHz to 1000MHz.

### 5.5.Data Sample

Frequency( MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	49.83	-22.03	27.80	43.50	15.70	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m)= Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading + Factor

Limit (dB $\mu$ v/m)= Limit stated in standard

Margin (dB) = Limit (dB $\mu$ v/m) - Result(dB $\mu$ v/m)

Calculation Formula:

Margin (dB) = Limit (dB $\mu$ v/m) - Result(dB $\mu$ v/m)

Result(dB $\mu$ v/m)= Reading(dB $\mu$ v)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit.


## 5.6.Radiated Emission Measurement Result

**PASS.**

Test Lab: 3m Anechoic chamber

From 9kHz to 30MHz

We pretest all the mode and worst case (Full load, X) was recorded in the report.

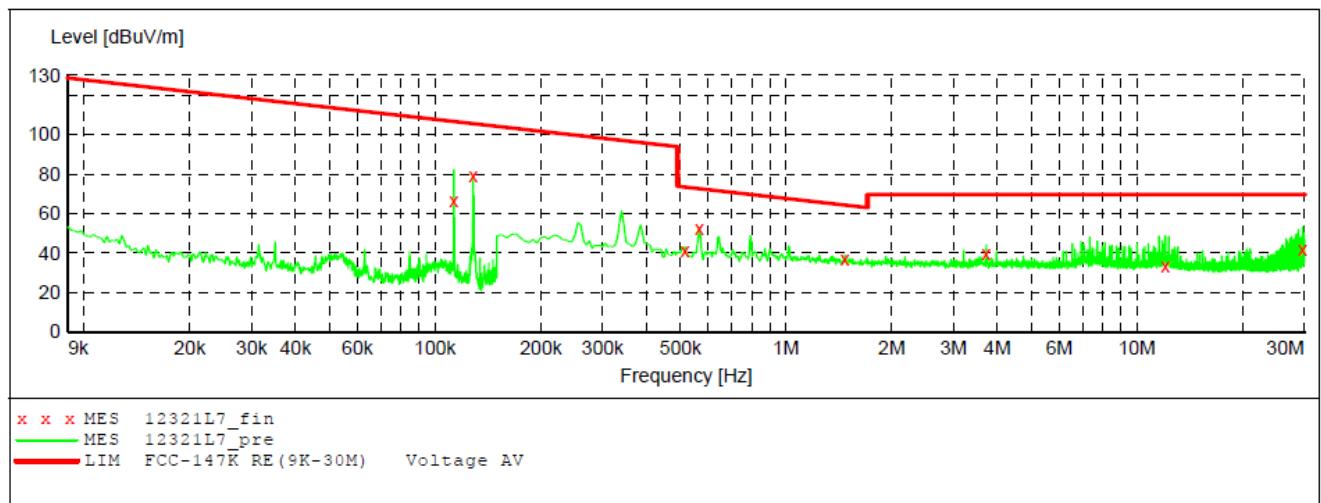

### MEASUREMENT RESULT: "12321L7\_fin"

2020-12-4 12:01


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
0.113000	66.50	20.1	106.5	40.0	QP	105.0	0.00	X
0.128200	79.20	20.1	105.4	26.2	QP	105.0	0.00	X
0.515000	40.80	20.3	73.4	32.6	QP	105.0	0.00	X
0.565000	52.50	20.3	72.6	20.1	QP	105.0	0.00	X
1.470000	37.20	20.4	64.3	27.1	QP	105.0	0.00	X
3.720000	39.90	20.5	69.5	29.6	QP	105.0	0.00	X
12.030000	33.60	20.8	69.5	35.9	QP	105.0	0.00	X
29.625000	41.90	21.9	69.5	27.6	QP	105.0	0.00	X

Part 15 Section 15.31(f)(2) (9kHz-30MHz)


Limit at 3m=Limit at 300m-40\*log(3(m)/300(m))

Limit at 3m=Limit at 30m-40\*log(3(m)/30(m))

From 30MHz to 1000MHz  
Worst case (Full Load 113.2kHz) recorder in the report.  
Horizontal

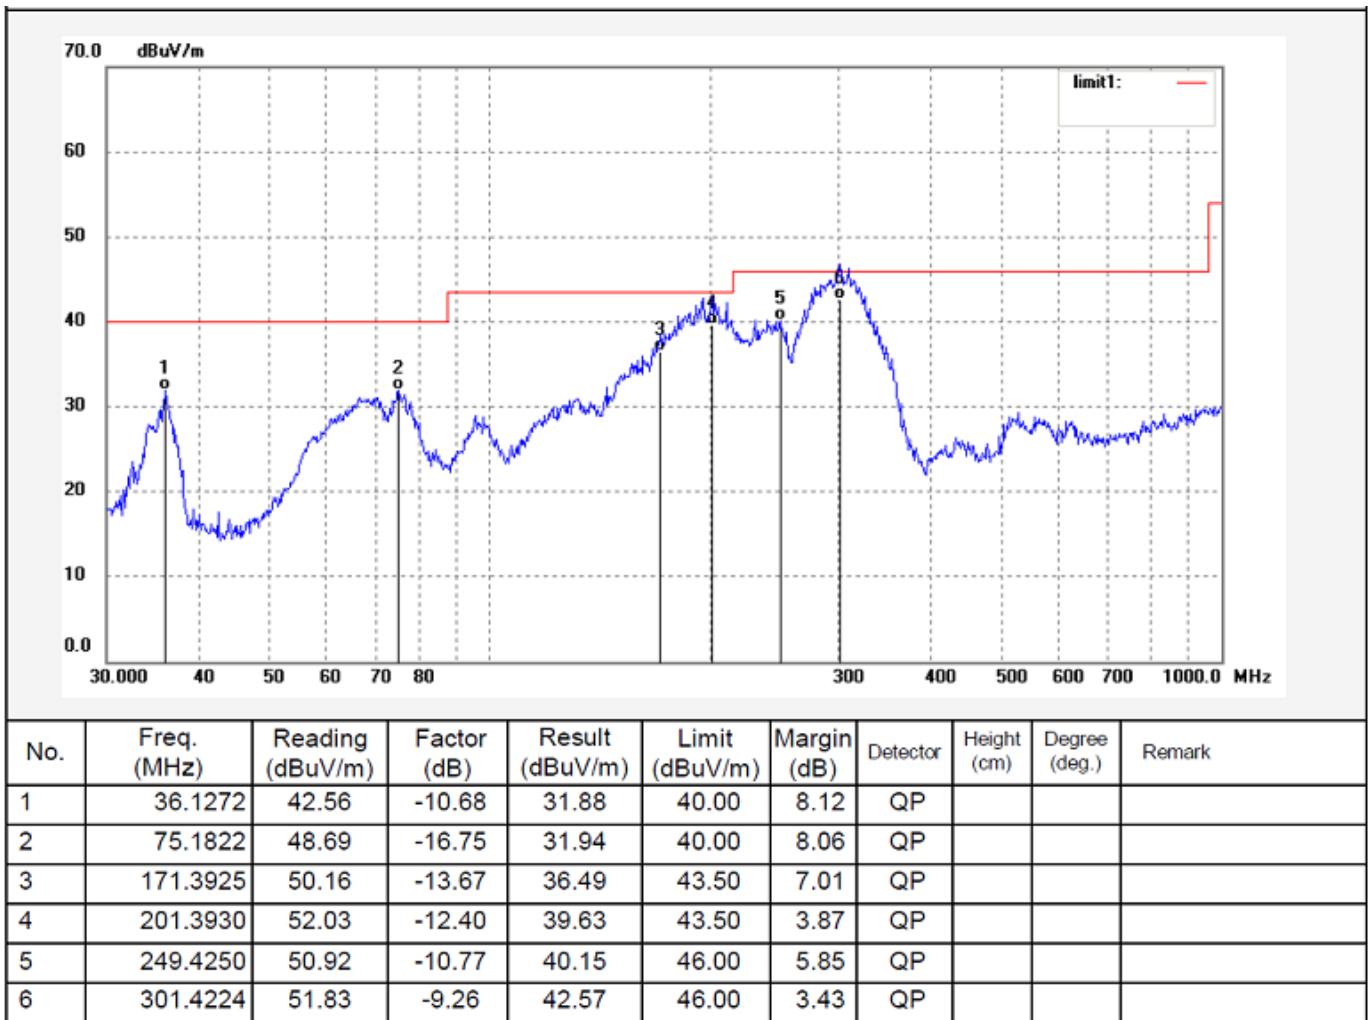

## Vertical

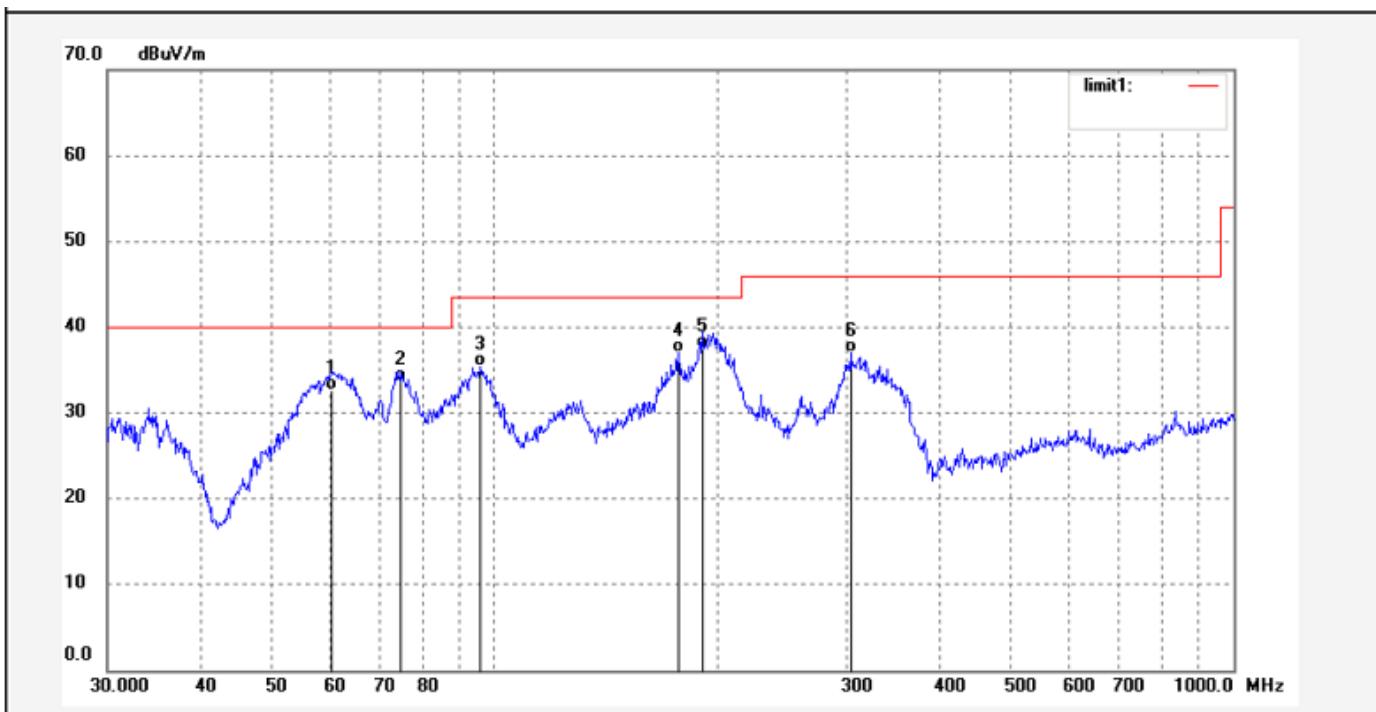

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	60.2801	46.73	-14.04	32.69	40.00	7.31	QP			
2	74.9191	50.41	-16.75	33.66	40.00	6.34	QP			
3	95.7622	49.96	-14.55	35.41	43.50	8.09	QP			
4	177.5091	50.59	-13.56	37.03	43.50	6.47	QP			
5	191.0738	50.13	-12.61	37.52	43.50	5.98	QP			
6	303.5437	46.23	-9.24	36.99	46.00	9.01	QP			


## 6. ANTENNA REQUIREMENT

### 6.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.2. Antenna Construction

Device is equipped with permanent attached two coil antennas, which are not displaced by other antenna. The max Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

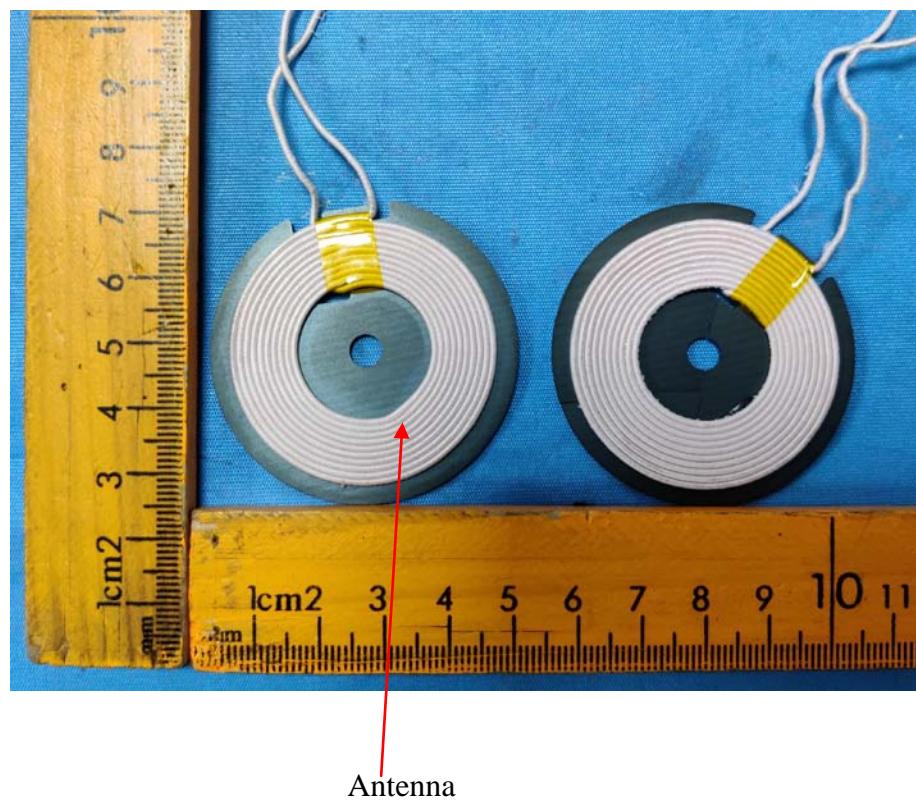

\*\*\*\*\* END OF REPORT \*\*\*\*\*