



# FCC TEST REPORT

## FCC ID: 2AX73-102

|            |   |                      |
|------------|---|----------------------|
| Product    | : | Miiibo Drink Mini    |
| Model Name | : | 102MB                |
| Brand      | : | N/A                  |
| Report No. | : | PTC20110505301E-FC01 |

### Prepared for

Shenzhen Miiibo Innovation Technology Co.,Ltd

Qianhai Complex A201, Qianwan Road 1, Qianhai Shenzhen-Hong Kong  
Cooperation Zone, Shenzhen, P.R.China

### Prepared by

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China



## 1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Miiibo Innovation Technology Co.,Ltd  
Address : Qianhai Complex A201, Qianwan Road 1, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, P.R.China  
Manufacturer's name : Shenzhen Miiibo Innovation Technology Co.,Ltd  
Address : Qianhai Complex A201, Qianwan Road 1, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, P.R.China  
Product name : Miiibo Drink Mini  
Model name : 102MB  
Standards : FCC Part15 Subpart C  
Test procedure : ANSI C63.10:2013  
Test Date : Nov 12, 2020 to Nov 27, 2020  
Date of Issue : Nov 27, 2020  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang'.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that reads 'Chris Du'.

Chris Du / Manager



## Contents

|  | <b>Page</b> |
|--|-------------|
| <b>1 TEST RESULT CERTIFICATION</b> .....                 | 2           |
| <b>2 TEST SUMMARY</b> .....                              | 4           |
| <b>3 GENERAL INFORMATION</b> .....                       | 5           |
| 3.1 GENERAL DESCRIPTION OF E.U.T.....                    | 5           |
| 3.2 DESCRIPTION OF TEST MODES.....                       | 6           |
| 3.3 TEST SITE.....                                       | 7           |
| <b>4 EQUIPMENT DURING TEST</b> .....                     | 8           |
| 4.1 EQUIPMENTS LIST.....                                 | 8           |
| 4.2 MEASUREMENT UNCERTAINTY.....                         | 9           |
| <b>5 TEST STANDARD AND LIMIT</b> .....                   | 10          |
| 5.1 TEST SETUP.....                                      | 10          |
| 5.2 TEST PROCEDURE.....                                  | 10          |
| 5.3. TEST DATA.....                                      | 11          |
| <b>6 RADIATION SPURIOUS EMISSION AND BAND EDGE</b> ..... | 13          |
| 6.1 TEST STANDARD AND LIMIT.....                         | 13          |
| 6.2 TEST SETUP.....                                      | 14          |
| 6.3 TEST PROCEDURE.....                                  | 15          |
| 6.4 TEST DATA.....                                       | 15          |
| <b>7 ANTENNA REQUIREMENT</b> .....                       | 19          |
| 7.1 TEST STANDARD AND REQUIREMENT.....                   | 19          |
| 7.2 ANTENNA CONNECTED CONSTRUCTION.....                  | 19          |
| <b>APPENDIX I -- TEST SETUP PHOTOGRAPH</b> .....         | 20          |
| <b>APPENDIX II -- EXTERNAL PHOTOGRAPH</b> .....          | 22          |



## 2 Test Summary

| Standard Section                    | Test Item               | Result |
|-------------------------------------|-------------------------|--------|
| FCC Part 15, Paragraph 15.207       | Conducted Emission Test | PASS   |
| FCC Part 15, Paragraph 15.209(a)(f) | Spurious Emission       | PASS   |
| Part 15.203                         | Antenna Requirement     | PASS   |



### 3 General Information

#### 3.1 General Description of E.U.T.

|                      |   |   |
|----------------------|---|---|
| Product Name         | : | Miiibo Drink Mini                       |
| Model Name           | : | 102MB                                   |
| Operation Frequency  | : | 110-205KHz                              |
| Type of Modulation   | : | ASK                                     |
| Antenna installation | : | Inductive loop coil Antenna             |
| Antenna Gain         | : | 0 dBi                                   |
| Power supply         | : | Input: 100-240V~ 50/60Hz,<br>Output: 2W |
| Hardware Version     | : | N/A                                     |
| Software Version     | : | N/A                                     |



### 3.2 Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                        |
|--------------|------------------------------------|
| Mode 1       | Full load, Wireless charger module |

| For Conducted Emission |                                    |
|------------------------|------------------------------------|
| Final Test Mode        | Description                        |
| Mode 1                 | Full load, Wireless charger module |

| For Radiated Emission |                                    |
|-----------------------|------------------------------------|
| Final Test Mode       | Description                        |
| Mode 1                | Full load, Wireless charger module |

Note: (1)Test channel is 0.1250MHz.

(2)All the situation(full load, half load and empty load) has been tested,only the worst situation (full load) was recorded in the report.

(3)2W All modes have been tested. This report only show the test result of the worst case(Full load 2W).



Report No.: PTC20110505301E-FC01

### 3.3 Test Site

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

| Name of Equipment   | Manufacturer | Model  | Serial No. | Characteristics | Calibration Due |
|---------------------|--------------|--------|------------|-----------------|-----------------|
| MXG Signal Analyzer | Agilent      | N9020A | MY56070279 | 10Hz-30GHz      | Aug. 21, 2021   |
| Coaxial Cable       | CDS          | 79254  | 46107086   | 10Hz-30GHz      | Aug. 21, 2021   |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

| Name of Equipment            | Manufacturer  | Model      | Serial No.   | Characteristics | Calibration Due |
|------------------------------|---------------|------------|--------------|-----------------|-----------------|
| EMI Test Receiver            | Rohde&Schwarz | ESCI       | 101417       | 9KHz-3GHz       | Aug 19, 2021    |
| Loop Antenna                 | Schwarzbeck   | FMZB 1519  | 012          | 9 KHz -30MHz    | Aug. 21, 2021   |
| Bilog Antenna                | SCHWARZBECK   | VULB9160   | 9160-3355    | 25MHz-2GHz      | Aug. 21, 2021   |
| Preamplifier (low frequency) | SCHWARZBECK   | BBV 9475   | 9745-0013    | 1MHz-1GHz       | Aug 19, 2021    |
| Cable                        | Schwarzbeck   | PLF-100    | 549489       | 9KHz-3GHz       | Aug. 19, 2021   |
| Spectrum Analyzer            | Agilent       | E4407B     | MY45109572   | 9KHz-40GHz      | Aug. 19, 2021   |
| Horn Antenna                 | SCHWARZBECK   | 9120D      | 9120D-1246   | 1GHz-18GHz      | Aug. 21, 2021   |
| Power Amplifier              | LUNAR EM      | LNA1G18-40 | J10100000081 | 1GHz-26.5GHz    | Aug. 21, 2021   |
| Cable                        | H+S           | CBL-26     | N/A          | 1GHz-26.5GHz    | Aug. 21, 2021   |

Conducted Emissions

| Name of Equipment        | Manufacturer  | Model  | Serial No. | Characteristics | Calibration Due |
|--------------------------|---------------|--------|------------|-----------------|-----------------|
| EMI Test Receiver        | Rohde&Schwarz | ESCI   | 101417     | 9KHz-3GHz       | Aug. 19, 2021   |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 102453     | 9KHz-300MHz     | Aug. 19, 2021   |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101342     | 9KHz-300MHz     | Aug. 19, 2021   |



#### 4.2 Measurement Uncertainty

|                        |   |                          |
|------------------------|---|--------------------------|
| Radiation Uncertainty  | : | Ur = 3.9 dB (Horizontal) |
|                        |   | Ur = 3.8 dB (Vertical)   |
| Conduction Uncertainty | : | Uc = 3.4 dB              |


#### 4.3 Description of Support Units

| Equipment | Model No. | Series No. |
|-----------|-----------|------------|
| Motor     | Input:2W  | N/A        |

## 5 Test Standard and Limit

| Test Standard | FCC Part15 Section 15.207 |                                |               |
|---------------|---------------------------|--------------------------------|---------------|
| Test Limit    | Frequency                 | Maximum RF Line Voltage (dBuV) |               |
|               |                           | Quasi-peak Level               | Average Level |
|               | 150kHz~500kHz             | 66 ~ 56 *                      | 56 ~ 46 *     |
|               | 500kHz~5MHz               | 56                             | 46            |
|               | 5MHz~30MHz                | 60                             | 50            |

## 5.1 Test Setup

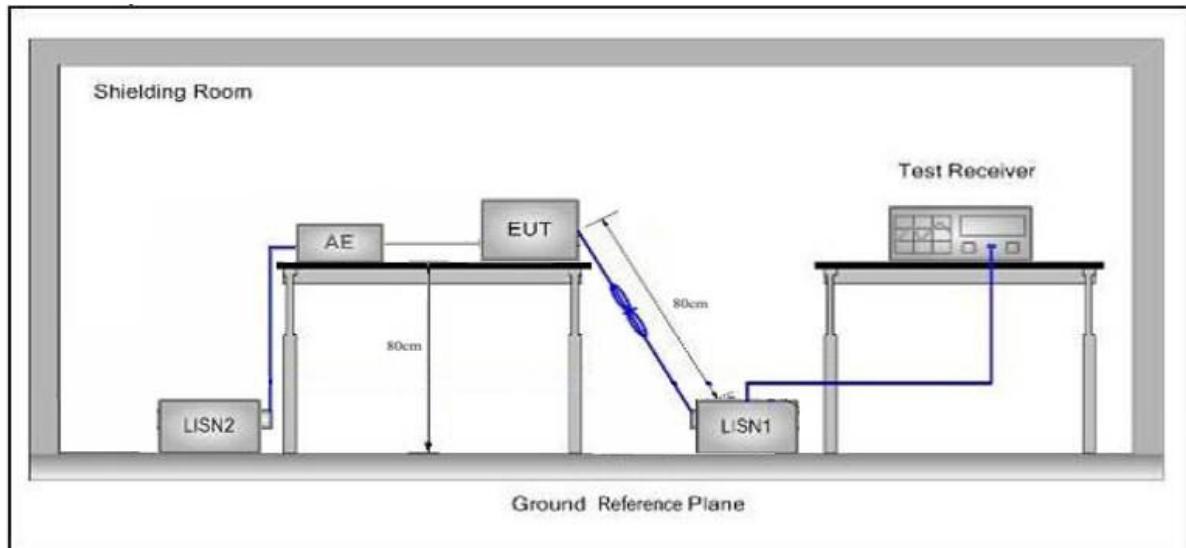

## 5.2 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.



### 5.3. Test Data

Please see the following pages

Note: During the test, pre-scan 120Vac/60Hz and 240Vac/60Hz of the Power supply, found 120Vac/60Hz was worse case, mode, the report only reflects the worst mode.


#### Conducted Emission Test Data

Operating Condition: Mode 1

Test Specification: AC 120V, 60Hz for adapter

Comment: Live Line

Tem.: 22°C Hum.: 51%

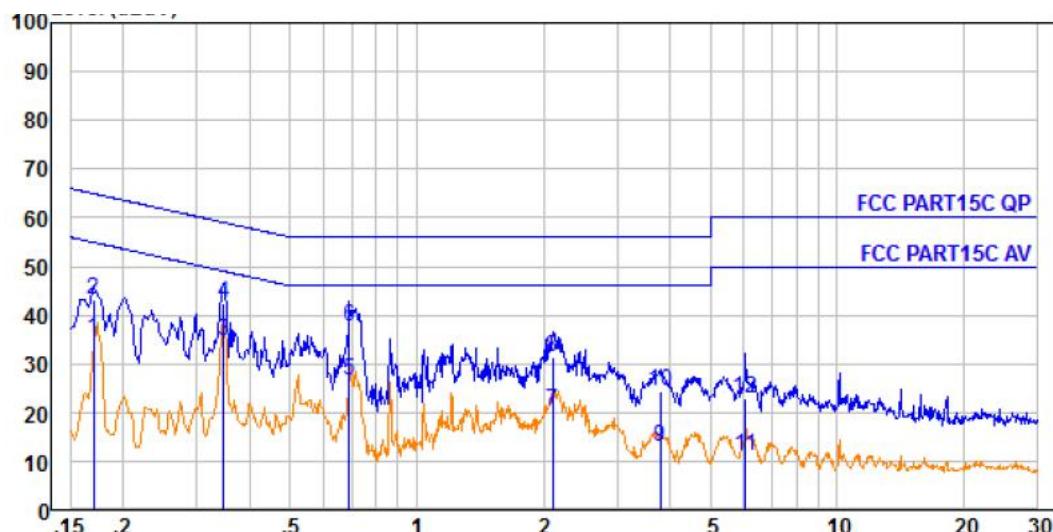

| No. | Freq<br>MHz | Cable<br>Loss<br>dB | AMN<br>Factor<br>dB | Receiver<br>Reading<br>dB $\mu$ V | Emission<br>Level<br>dB $\mu$ V | Over<br>Limit<br>dB | Remark |
|-----|-------------|---------------------|---------------------|-----------------------------------|---------------------------------|---------------------|--------|
| 1.  | 0.170       | 0.24                | 9.59                | 25.23                             | 35.06                           | 54.94               | -19.88 |
| 2.  | 0.170       | 0.24                | 9.59                | 33.22                             | 43.05                           | 64.94               | -21.89 |
| 3.  | 0.346       | 0.39                | 9.60                | 24.53                             | 34.52                           | 49.05               | -14.53 |
| 4.  | 0.346       | 0.39                | 9.60                | 32.48                             | 42.47                           | 59.05               | -16.58 |
| 5.  | 0.690       | 0.44                | 9.61                | 16.64                             | 26.69                           | 46.00               | -19.31 |
| 6.  | 0.690       | 0.44                | 9.61                | 27.71                             | 37.76                           | 56.00               | -18.24 |
| 7.  | 2.110       | 0.47                | 9.61                | 10.33                             | 20.41                           | 46.00               | -25.59 |
| 8.  | 2.110       | 0.47                | 9.61                | 21.42                             | 31.50                           | 56.00               | -24.50 |
| 9.  | 3.799       | 0.47                | 9.65                | 2.81                              | 12.93                           | 46.00               | -33.07 |
| 10. | 3.799       | 0.47                | 9.65                | 14.08                             | 24.20                           | 56.00               | -31.80 |
| 11. | 6.056       | 0.53                | 9.70                | 0.94                              | 11.17                           | 50.00               | -38.83 |
| 12. | 6.056       | 0.53                | 9.70                | 12.80                             | 23.03                           | 60.00               | -36.97 |


**Conducted Emission Test Data**

Operating Condition: Mode 1

Test Specification: AC 120V, 60Hz for adapter

Comment: Neutral Line

Tem.: 22°C Hum.: 51%

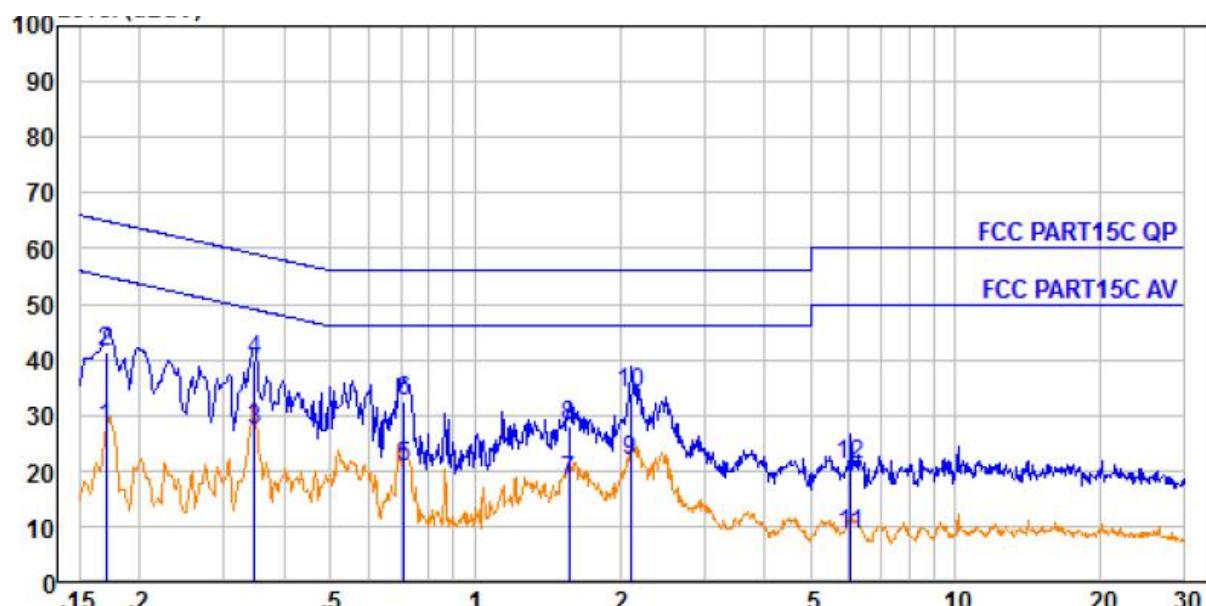

| No. | Freq<br>MHz | Cable<br>Loss<br>dB | AMN<br>Factor<br>dB | Receiver<br>Reading<br>dB $\mu$ V | Emission<br>Level<br>dB $\mu$ V | Limit<br>dB $\mu$ V | Over<br>Limit<br>dB | Remark  |
|-----|-------------|---------------------|---------------------|-----------------------------------|---------------------------------|---------------------|---------------------|---------|
| 1.  | 0.170       | 0.24                | 9.60                | 17.79                             | 27.63                           | 54.94               | -27.31              | Average |
| 2.  | 0.170       | 0.24                | 9.60                | 31.62                             | 41.46                           | 64.94               | -23.48              | QP      |
| 3.  | 0.346       | 0.39                | 9.62                | 17.17                             | 27.18                           | 49.05               | -21.87              | Average |
| 4.  | 0.346       | 0.39                | 9.62                | 29.90                             | 39.91                           | 59.05               | -19.14              | QP      |
| 5.  | 0.712       | 0.44                | 9.64                | 10.73                             | 20.81                           | 46.00               | -25.19              | Average |
| 6.  | 0.712       | 0.44                | 9.64                | 22.49                             | 32.57                           | 56.00               | -23.43              | QP      |
| 7.  | 1.568       | 0.47                | 9.64                | 7.84                              | 17.95                           | 46.00               | -28.05              | Average |
| 8.  | 1.568       | 0.47                | 9.64                | 17.87                             | 27.98                           | 56.00               | -28.02              | QP      |
| 9.  | 2.110       | 0.47                | 9.64                | 11.61                             | 21.72                           | 46.00               | -24.28              | Average |
| 10. | 2.110       | 0.47                | 9.64                | 23.72                             | 33.83                           | 56.00               | -22.17              | QP      |
| 11. | 6.056       | 0.53                | 9.73                | -1.66                             | 8.60                            | 50.00               | -41.40              | Average |
| 12. | 6.056       | 0.53                | 9.73                | 10.69                             | 20.95                           | 60.00               | -39.05              | QP      |



## 6 Radiation Spurious Emission and Band Edge

### 6.1 Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209 and 15.205 |                                     |                   |            |                             |
|---------------|--|-------------------------------------|-------------------|------------|-----------------------------|
| Test Limit    | Frequency<br>(MHz)                     | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|               | 0.009MHz~0.490MHz                      | 2400/F(kHz)                         | -                 | -          | 300                         |
|               | 0.490MHz~1.705MHz                      | 24000/F(kHz)                        | -                 | -          | 30                          |
|               | 1.705MHz~30MHz                         | 30                                  | -                 | -          | 30                          |
|               | 30MHz~88MHz                            | 100                                 | 40.0              | Quasi-peak | 3                           |
|               | 88MHz~216MHz                           | 150                                 | 43.5              | Quasi-peak | 3                           |
|               | 216MHz~960MHz                          | 200                                 | 46.0              | Quasi-peak | 3                           |
|               | 960MHz~1000MHz                         | 500                                 | 54.0              | Quasi-peak | 3                           |
|               | Above 1000MHz                          | 500                                 | 54.0              | Average    | 3                           |
|               |  | -                                   | 74.0              | Peak       | 3                           |

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

## 6.2 Test Setup

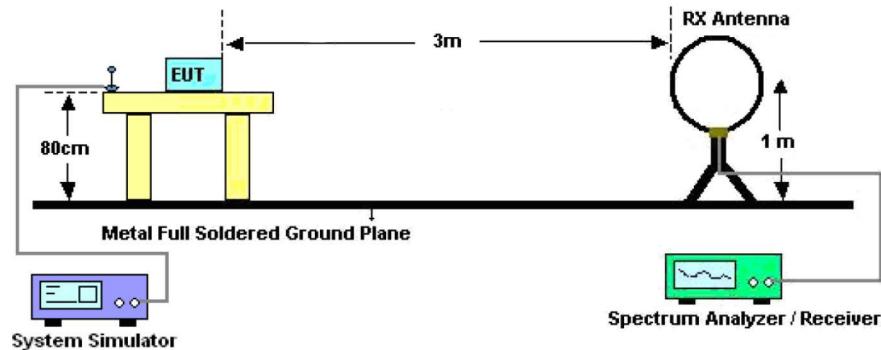


Figure 1. Below 30MHz

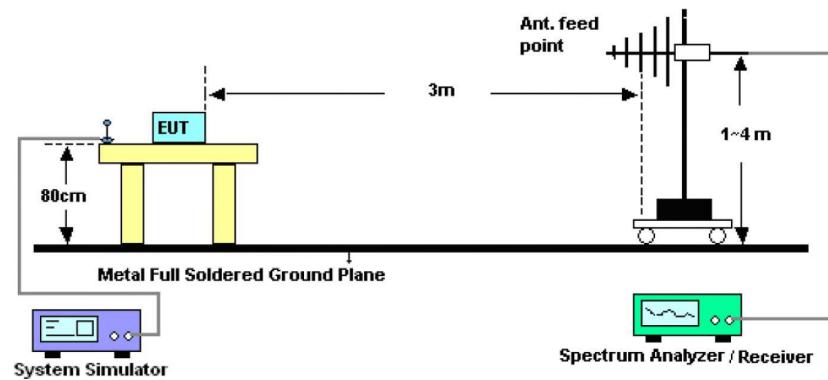


Figure 2. 30MHz to 1GHz

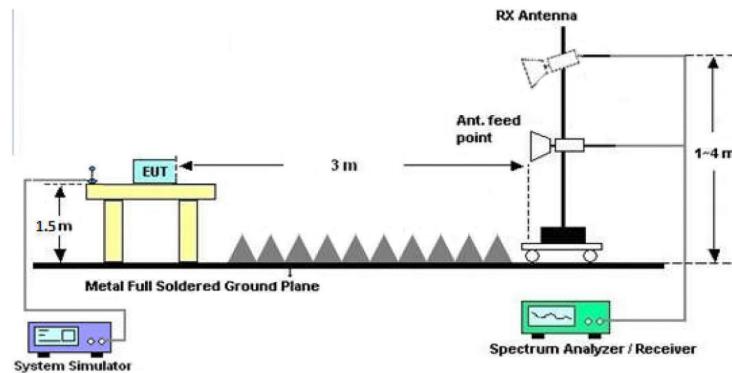


Figure 3. Above 1 GHz



### 6.3 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


### 6.4 Test Data

**PASS**

Note: The data is in TX mode, and this is the worst mode.

**Test Results (9K~30MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Temp.(°C)/Hum.(%RH): 24.7°C/51%RH  
 Distance: 3m

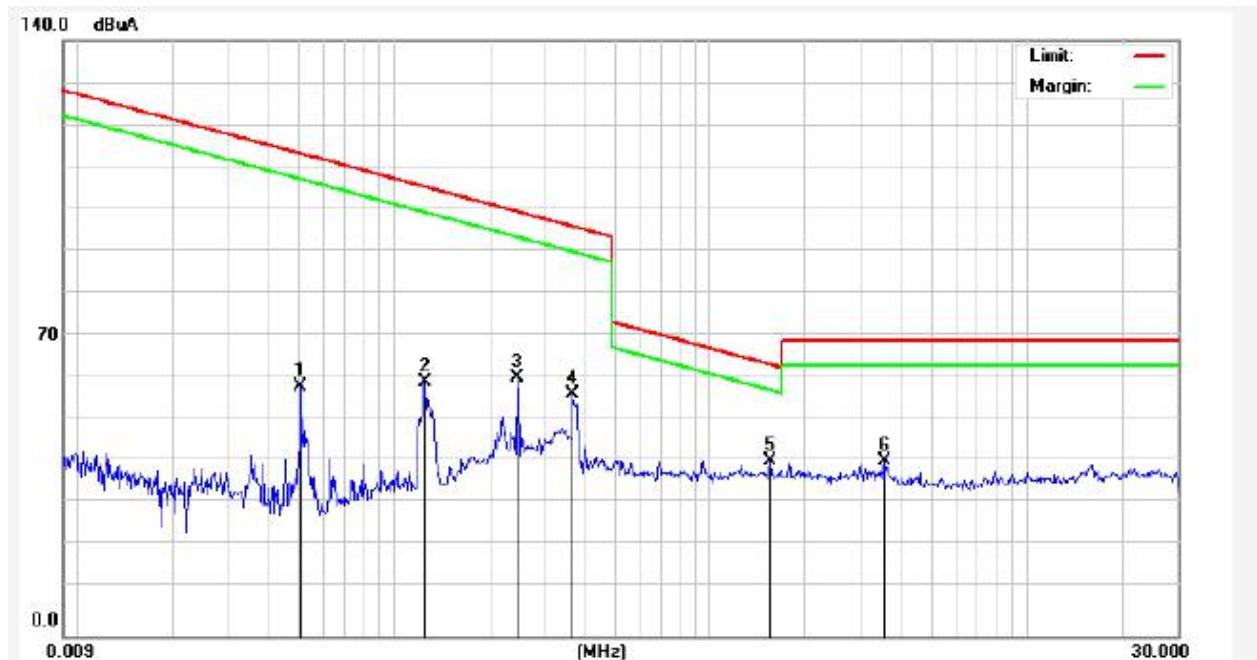


| No. | Freq. (MHz) | Reading (dBuA) | Factor (dB) | Result (dBuA) | Limit dBuA | Over Limit (dB) | Detector |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|
| 1   | 0.0509      | 19.80          | 38.92       | 58.72         | 113.36     | -54.64          | QP       |
| 2   | 0.1250      | 26.56          | 33.01       | 59.57         | 105.60     | -46.03          | QP       |
| 3   | 0.2459      | 21.01          | 39.55       | 60.56         | 99.75      | -39.19          | QP       |
| 4   | 0.3664      | 19.89          | 37.02       | 56.91         | 96.31      | -39.40          | QP       |
| 5   | 1.5420      | 11.61          | 29.47       | 41.08         | 63.84      | -22.76          | QP       |
| 6   | 3.5659      | 11.45          | 29.74       | 41.19         | 69.54      | -28.35          | QP       |

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

**Test Results (30~1000MHz)**


Test Mode: Mode 1  
Power Source: AC 120V, 60Hz for adapter  
Polarization: Vertical  
Temp.(°C)/Hum.(%RH): 24.3°C/54%RH  
Distance: 3m

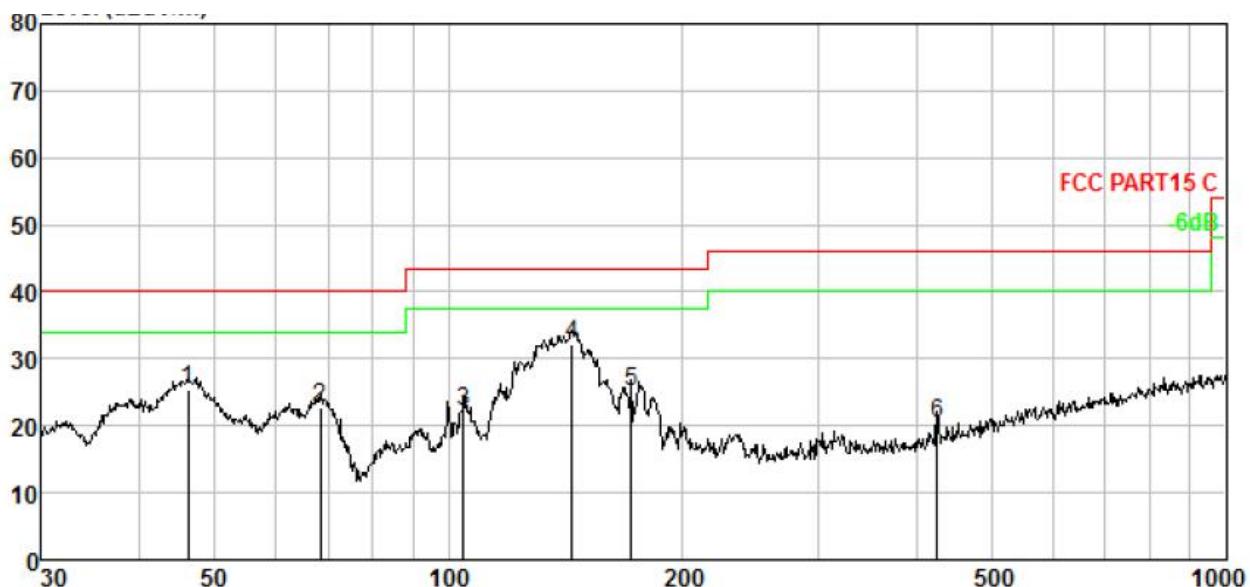

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1.  | 46.340   | 1.95          | 12.24           | 41.02                 | 29.92            | 25.29                 | 40.00        | -14.71        | QP     |
| 2.  | 68.391   | 2.62          | 10.38           | 39.61                 | 29.95            | 22.66                 | 40.00        | -17.34        | QP     |
| 3.  | 104.536  | 3.35          | 10.16           | 38.67                 | 29.99            | 22.19                 | 43.50        | -21.31        | QP     |
| 4.  | 144.335  | 3.90          | 13.48           | 44.84                 | 30.02            | 32.20                 | 43.50        | -11.30        | QP     |
| 5.  | 171.995  | 4.20          | 13.12           | 37.72                 | 30.03            | 25.01                 | 43.50        | -18.49        | QP     |
| 6.  | 425.028  | 5.76          | 15.37           | 29.84                 | 30.75            | 20.22                 | 46.00        | -25.78        | QP     |

**Test Results (30~1000MHz)**

Test Mode: Mode 1  
Power Source: AC 120V, 60Hz for adapter  
Polarization: Horizontal  
Temp.(°C)/Hum.(%RH): 24.3°C/54%RH  
Distance: 3m

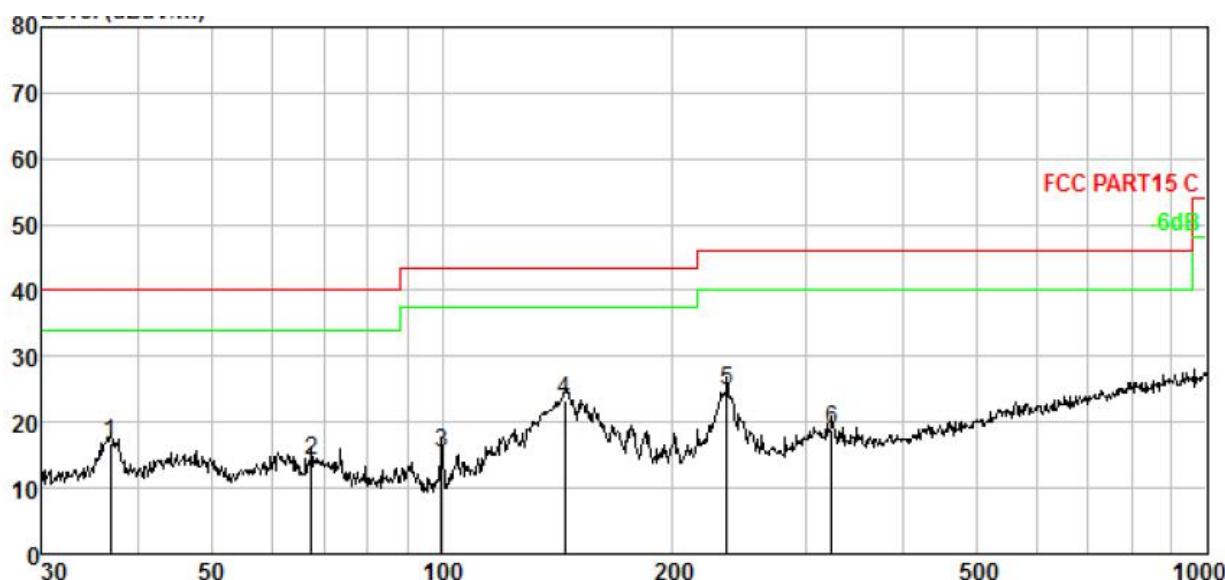

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1.  | 36.895   | 1.56          | 12.16           | 32.87                 | 29.90            | 16.69                 | 40.00        | -23.31        | QP     |
| 2.  | 67.438   | 2.59          | 10.55           | 31.06                 | 29.95            | 14.25                 | 40.00        | -25.75        | QP     |
| 3.  | 99.878   | 3.27          | 9.59            | 32.47                 | 29.99            | 15.34                 | 43.50        | -28.16        | QP     |
| 4.  | 144.842  | 3.91          | 13.50           | 35.92                 | 30.02            | 23.31                 | 43.50        | -20.19        | QP     |
| 5.  | 235.816  | 4.74          | 12.11           | 38.21                 | 30.15            | 24.91                 | 46.00        | -21.09        | QP     |
| 6.  | 323.320  | 5.29          | 13.78           | 30.17                 | 30.42            | 18.82                 | 46.00        | -27.18        | QP     |


## 7 Antenna Requirement

### 7.1 Test Standard and Requirement

|               |  |
|---------------|--|
| Test Standard | FCC Part15 Section 15.203  |
| Requirement   | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |

### 7.2 Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

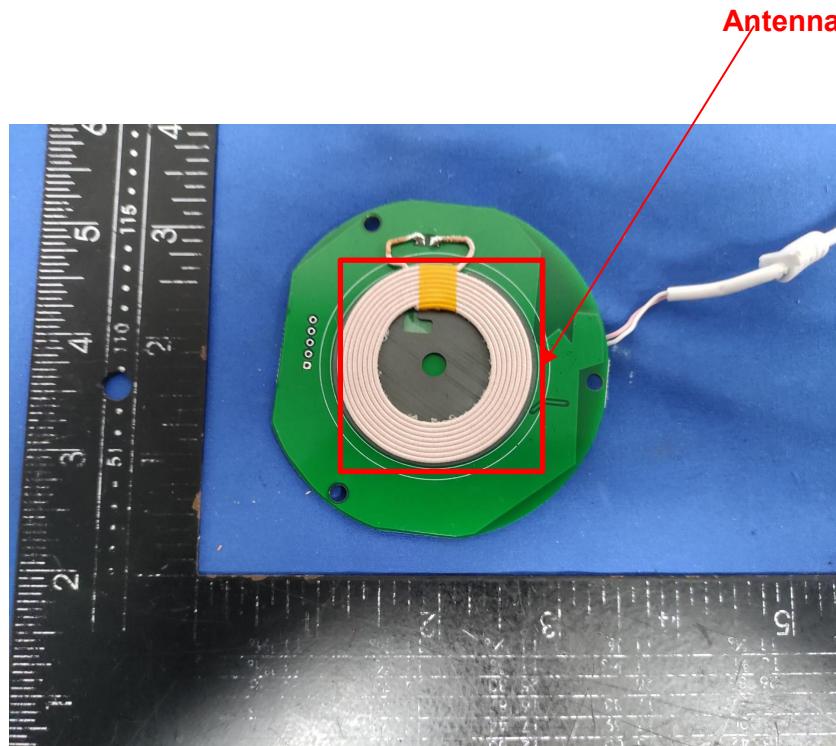


## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test


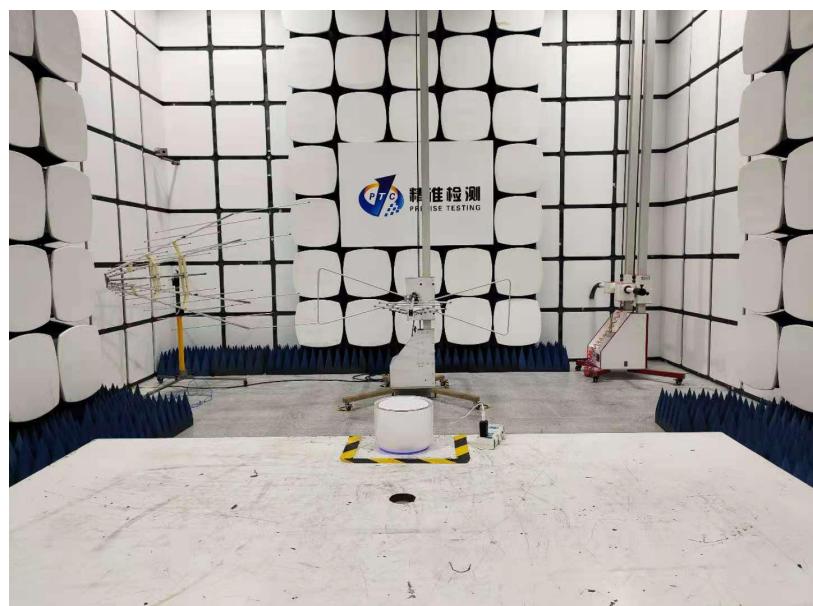







## APPENDIX II -- EXTERNAL PHOTOGRAPH


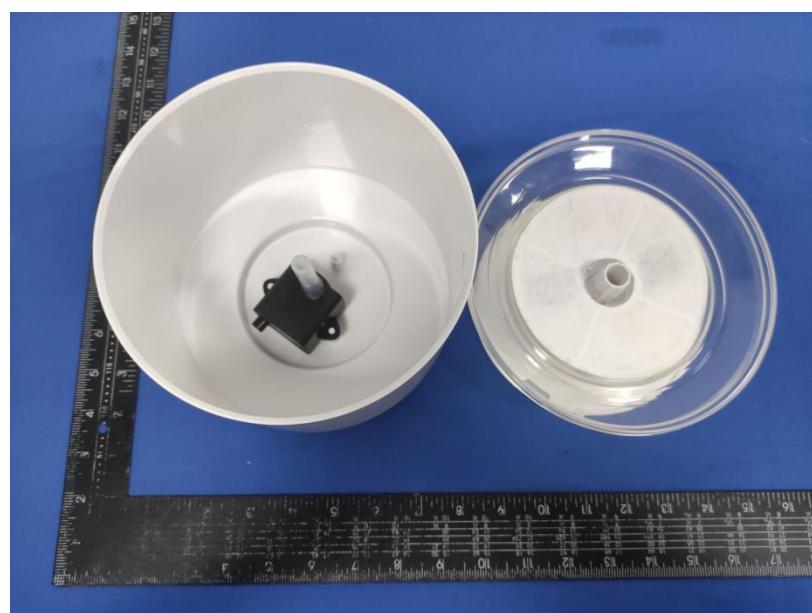




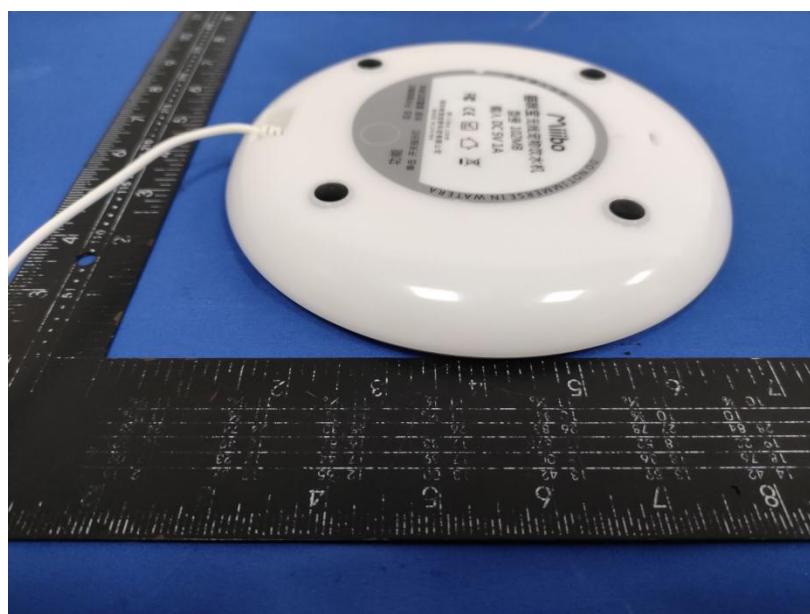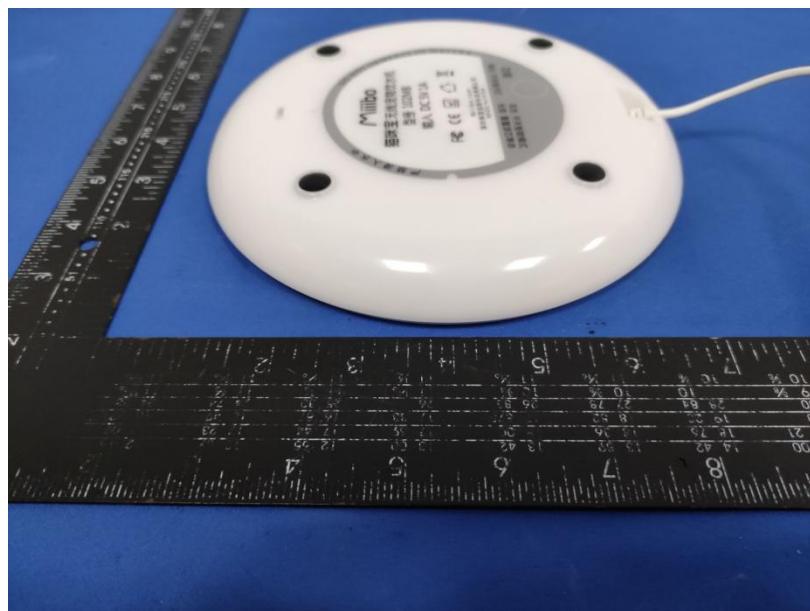

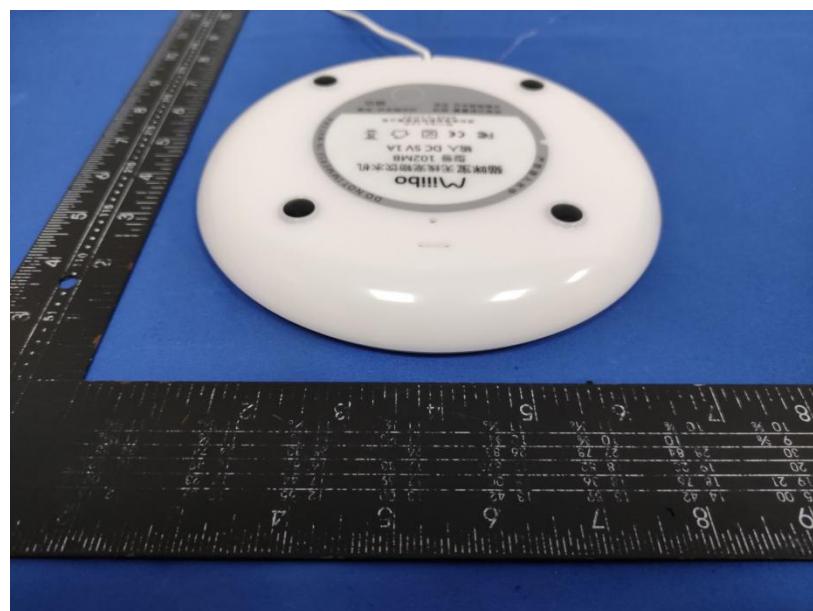

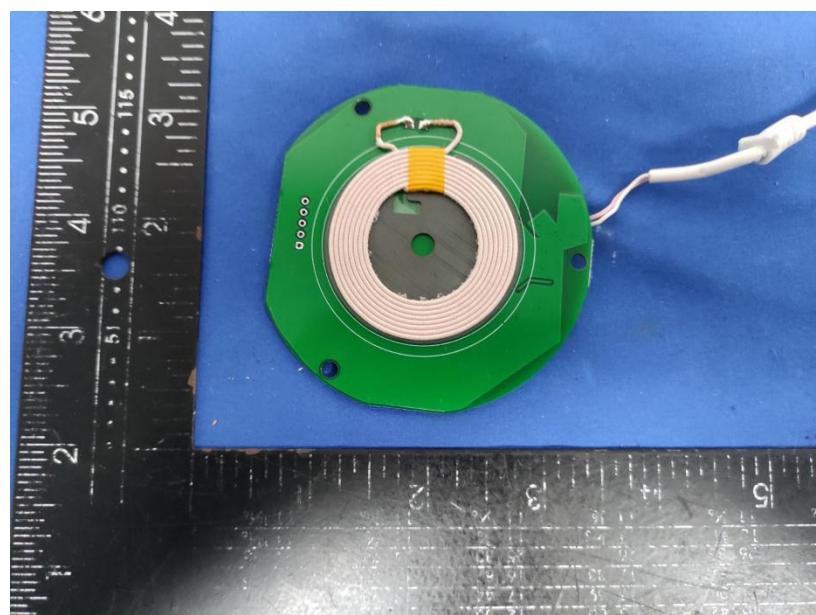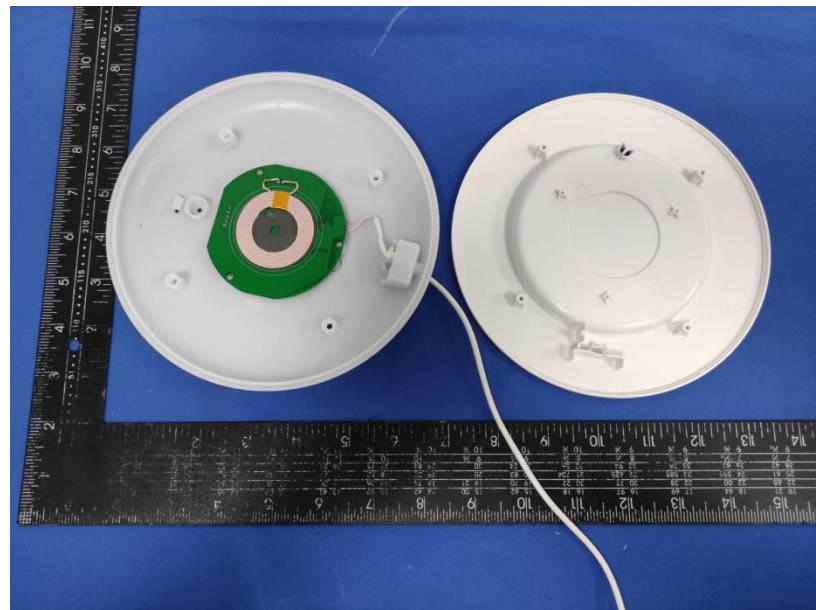

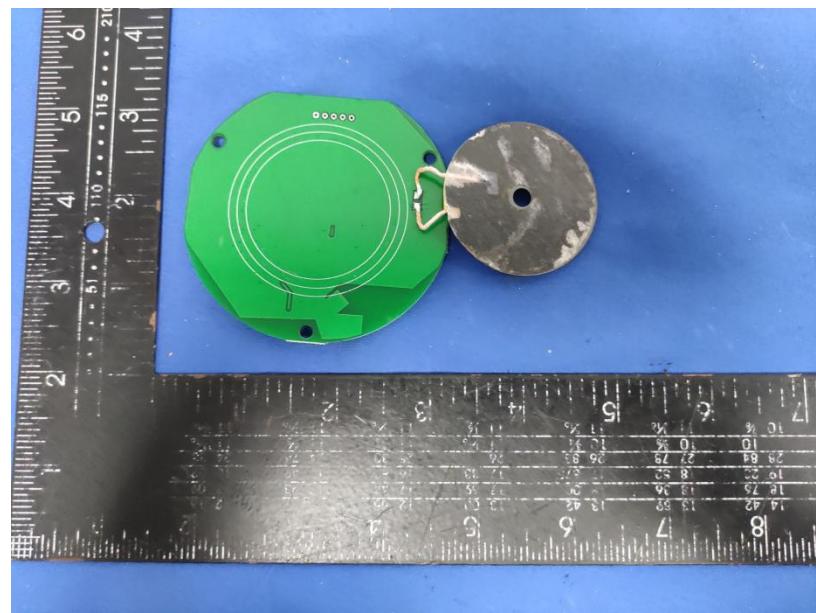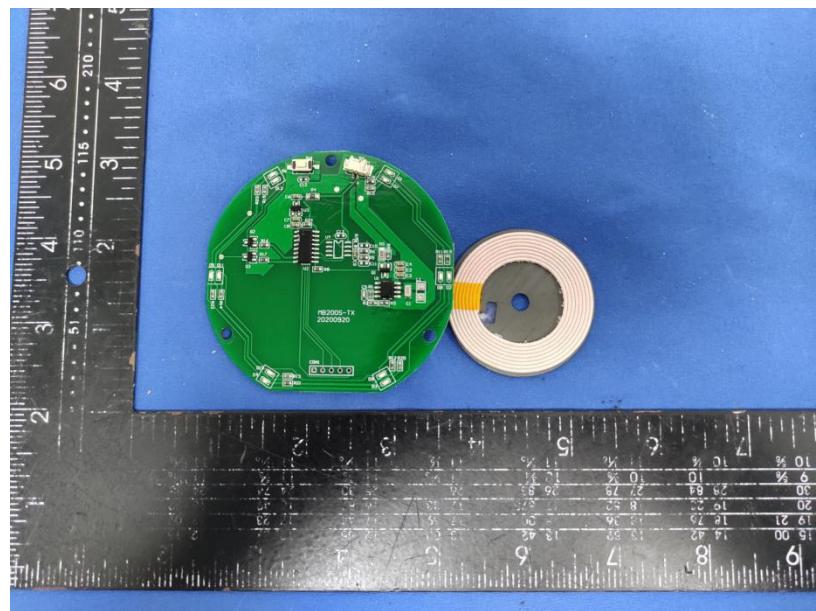

\*\*\*\*\*THE END REPORT\*\*\*\*\*