



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.407

Report Reference No......: **GTS20200907014-1-13**

FCC ID.....: **2AX7EWCUBE-1000**

Compiled by

(position+printed name+signature) .: File administrators Peter Xiao

Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Moon Tan

Moon Tan

Approved by

(position+printed name+signature) .: Manager Simon Hu

Simon Hu

Date of issue: Dec.04, 2020

Representative Laboratory Name.: **Shenzhen Global Test Service Co.,Ltd.**

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China

Applicant's name.....: **Donica Aviation Engineering Co., Ltd.**

Address: 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Test specification

Standard: **FCC Part 15.407: UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: **Wireless Cube (abbreviated as wCube, also called AirCinema Cube)**

Trade Mark: DONICA

Manufacturer: Donica Aviation Engineering Co., Ltd.

Model/Type reference: wCube-1000

Listed Models: N/A

Operation Frequency.....: From 5180MHz to 5240MHz/ 5745MHz to 5825MHz

Hardware Version: V1.0

Software Version: V1.0

Rating: DC 28.0V

Result: **PASS**

TEST REPORT

Test Report No. : GTS20200907014-1-13	Dec.04, 2020
	Date of issue

Equipment under Test : Wireless Cube (abbreviated as wCube, also called AirCinema Cube)

Model /Type : wCube-1000

List Models : N/A

Applicant : **Donica Aviation Engineering Co., Ltd.**

Address : 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Manufacturer : **Donica Aviation Engineering Co., Ltd.**

Address : 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	7
2.4. Short description of the Equipment under Test (EUT)	7
2.5. EUT operation mode	7
2.6. Block Diagram of Test Setup	8
2.7. Related Submittal(s) / Grant (s)	8
2.8. EUT Exercise Software	8
2.9. Special Accessories	8
2.10. External I/O Cable	8
2.11. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Test Description	10
3.6. Equipments Used during the Test	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	14
4.3. Duty Cycle	31
4.4. Maximum Average Output Power	54
4.5. Power Spectral Density	64
4.6. 6dB Bandwidth	119
4.7. 26dBc Bandwidth	162
4.8. Band Edge Compliance	205
4.9. Frequency Stability	245
4.10. Antenna Requirement	257
5. TEST SETUP PHOTOS OF THE EUT	258
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	258

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02 General U-NII Test Procedures New Rules v02r01](#): UNII, U-NII, U-NII Test Procedures

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep.24, 2020
	:	
Testing commenced on	:	Sep.24, 2020
	:	
Testing concluded on	:	Dec.04, 2020

2.2. Product Description

Product Name	Wireless Cube (abbreviated as wCube, also called AirCinema Cube)
Trade Mark	DONICA
Model/Type reference	wCube-1000
List Model	N/A
Model Declaration	N/A
Hardware version	V1.0
Software version	V1.0
Power supply:	DC 28.0V
Sample ID	GTS20200907014-1-1#& GTS20200907014-1-2#
2G	
Support Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
Release Version	R99
GPRS Class	Class 12
EGPRS Class	Class 12
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Type Of Modulation	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description	Internal Antenna; 0dBi (max.) For GSM 850; 0dBi (max.) For DCS 1900;
3G	
UMTS Operation Frequency Band	UMTS FDD Band 2(1850 MHz -1910MHz) UMTS FDD Band 4(1710 MHz -1755MHz) UMTS FDD Band 5(824 MHz -849MHz)
WCDMA Release Version	R6
HSDPA Release Version	Release 6
Modulation Type	QPSK for UMTS
Antenna Description	Internal Antenna; 1.0dBi (max.) For WCDMA Band 2, 4,5;
LTE	
LTE Operation Frequency Band	E-UTRA Band 2(1850 MHz -1910MHz) E-UTRA Band 4(1710 MHz -1755MHz) E-UTRA Band 5(824 MHz -849MHz) E-UTRA Band 7(2500 MHz -2570MHz) E-UTRA Band 12(699 MHz -716MHz) E-UTRA Band 13(777 MHz -787MHz) E-UTRA Band 25(1850 MHz -1915MHz)

	E-UTRA Band 26(814 MHz -824MHz) E-UTRA Band 26(824 MHz -849MHz) E-UTRA Band 38(2570 MHz -2620MHz) E-UTRA Band 41(2496 MHz -2690MHz)
LTE Release Version	R9
Type Of Modulation	QPSK/16QAM
Antenna Description	External&Internal Antenna; 2.0dBi (max.) For LTE Band 2, 4, 5, 7, 12, 13, 25, 26, 38, 41
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	802.11b: DSSS; 802.11g/n/ax: OFDM
Antenna Description	Four same Internal Antenna, support 4*4MIMO technology ANT9 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT10 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT11 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT12 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band
WIFI(5.2G Band)	
Frequency Range	5180MHz ~ 5240MHz
Channel Number	4 Channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	802.11a/n/ac/ax: OFDM
Antenna Description	Four Internal Antennas; support 4*4MIMO technology ANT5 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT6 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT7 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT8 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac/ax: OFDM
Antenna Description	Four Internal Antennas; support 4*4MIMO technology ANT1 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT2 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT3 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT4 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐	230V / 50 Hz	☐	120V / 60Hz
		☐	12 V DC	☐	24 V DC
		☒	Other (specified in blank below)		

DC 28V

2.4. Short description of the Equipment under Test (EUT)

This is a Portable computer.

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX.

Antenna	Chain5			Chain6			Chain7			Chain8			Simultaneously
Bandwidth Mode	20M Hz	40M Hz	80M Hz	20M Hz	40M Hz	80M Hz	20M Hz	40 MHz	80 MHz	20 MHz	40 MHz	80M Hz	/
IEEE 802.11a	☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☒	☒	☐	☒	☒	☐	☒	☒	☐	☒
IEEE 802.11ac	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
IEEE 802.11ax	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

Antenna	Chain1			Chain2			Chain3			Chain4			Simultaneously
Bandwidth Mode	20M Hz	40M Hz	80M Hz	20M Hz	40M Hz	80M Hz	20M Hz	40 MHz	80 MHz	20 MHz	40 MHz	80M Hz	/
IEEE 802.11a	☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☒	☒	☐	☒	☒	☐	☒	☒	☐	☒
IEEE 802.11ac	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
IEEE 802.11ax	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

IEEE 802.11a/ac20/ac40/ac80/n20/n40/ax20/ax40/ax80:


UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position. AC main conducted emission pre-test voltage at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case; AC main conducted emission pre-test at charge from PC modes, recorded worst case; Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11ac VHT20 mode (HCH).

2.6. Block Diagram of Test Setup

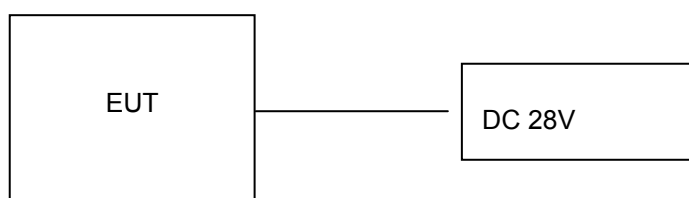

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AX7EWCUBE-1000** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (FTP Server) provided by application.

2.9. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
PHILIPS	Displayer	203V5L	/	SDOC
MEAN WELL ENTERPRISES CO.,LTD.	Adapter	LPV-60-24	/	SDOC

Note: The Displayer is only used for auxiliary testing.

2.10. External I/O Cable

I/O Port Description	Quantity	Cable
VGA Port	1	1.0m, Unscreened Cable
USB Port	1	N/A
LAN Port	1	1.0m, Unscreened Cable
DC IN Port	1	1.0m, Unscreened Cable

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is 165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Applied Standard: FCC Part 15 Subpart E				
FCC Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	GTS20200907014-1-1#	Compliant	Note 1
§15.407(a)	Maximum Conducted Output Power	GTS20200907014-1-1#	Compliant	Note 1
§15.407(a)	Power Spectral Density	GTS20200907014-1-1#	Compliant	Note 1
§15.407(a)	26dB&6dB Bandwidth and 99% Bandwidth	GTS20200907014-1-1#	Compliant	Note 1
§15.209, §15.407(b)	Radiated Emissions	GTS20200907014-1-1# GTS20200907014-1-2#	Compliant	Note 1
§15.209, §15.407(b)	Emissions at Restricted Band	GTS20200907014-1-1# GTS20200907014-1-2#	Compliant	Note 1
§15.407(g)	Frequency Stability	GTS20200907014-1-1#	Compliant	Note 1
§15.207(a)	AC Mians Line Conducted Emissions	GTS20200907014-1-2#	Compliant	Note 1
§15.203	Antenna Requirements	GTS20200907014-1-1#	Compliant	Note 1
§15.407 §2.1091	RF Exposure	GTS20200907014-1-1#	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (SAR Report).
5. We tested all test mode and recorded worst case in report

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	802.11a	6 Mbps
Power Spectral Density	802.11ac20/ac40/ac80 802.11n HT20/40/ ax20/ax40/ax80	MCS0
6dB Bandwidth		
26dB Bandwidth		
Radiated Emission30M~1GHz&	802.11a	6 Mbps
Radiated Emission 1GHz~10 th Harmonic		
Band Edge	802.11ac20/ac40/ac80 802.11n HT20/40/ ax20/ax40/ax80	MCS0

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2020/09/19	2021/09/18
LISN	R&S	ESH2-Z5	893606/008	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESCI7	101102	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2020/09/19	2021/09/18
Spectrum Analyzer	R&S	FSV40	100019	2020/09/19	2021/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2020/09/19	2021/09/18
Signal generator	Agilent	E4421B	3610AO1069	2020/09/19	2021/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2020/09/19	2021/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2020/09/22	2021/09/21
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2020/10/12	2021/10/11
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/26	2021/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2020/09/19	2021/09/18
Amplifier	EMCI	EMC051845B	980355	2020/09/19	2021/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/09/19	2021/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2020/09/19	2021/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2020/09/19	2021/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2020/09/19	2021/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2020/09/19	2021/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2020/09/19	2021/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2020/09/19	2021/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/20	2021/06/19
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/20	2021/06/19
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

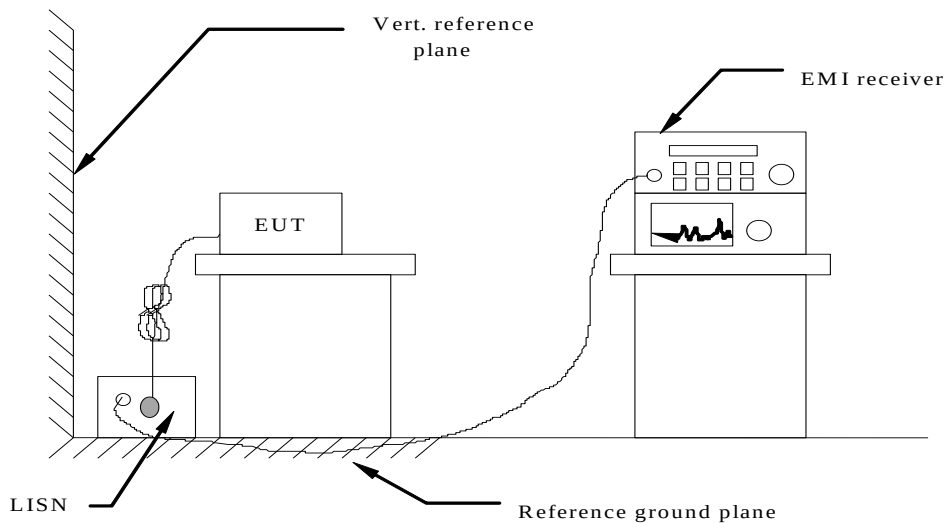

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 28V power from Computer, the PC received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at all mode in AC 120V/60Hz, the worst case was recorded .

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	IEEE 802.11ac20 HCH


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

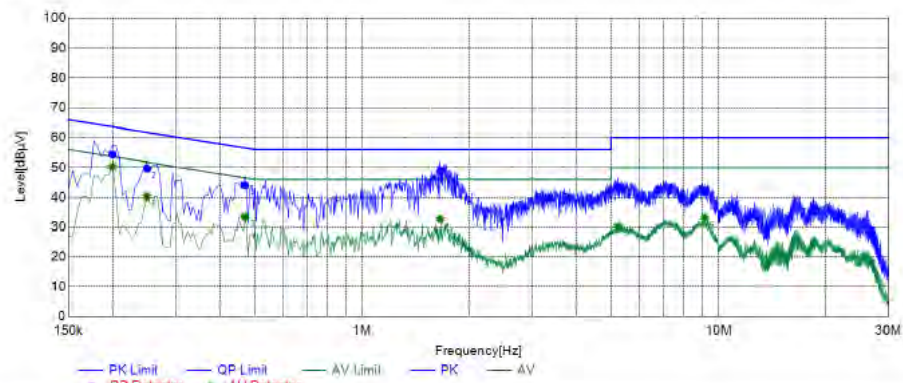

Final Data List

NO	Frequency [MHz]	QP Reading [dBμV]	AVG Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG Result [dBμV]	QP Limit [dBμV]	AVG Limit [dBμV]	QP Margin [dB]	AVG Margin [dB]	Line	Remark
1	0.1995	44.26	40.26	10.06	54.32	50.31	63.63	53.63	9.31	3.32	L1	PASS
2	0.2490	39.68	30.19	10.02	49.70	40.21	61.79	51.79	12.09	11.58	L1	PASS
3	0.4695	33.88	23.43	10.05	43.93	33.48	56.52	46.52	12.59	13.04	L1	PASS
4	1.6575	38.82	22.57	10.13	48.95	32.70	56.00	46.00	7.05	13.30	L1	PASS
5	5.2395	32.89	19.69	10.49	43.38	30.18	60.00	50.00	16.62	19.82	L1	PASS
6	9.1230	31.02	22.40	10.67	41.69	33.07	60.00	50.00	18.31	16.93	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

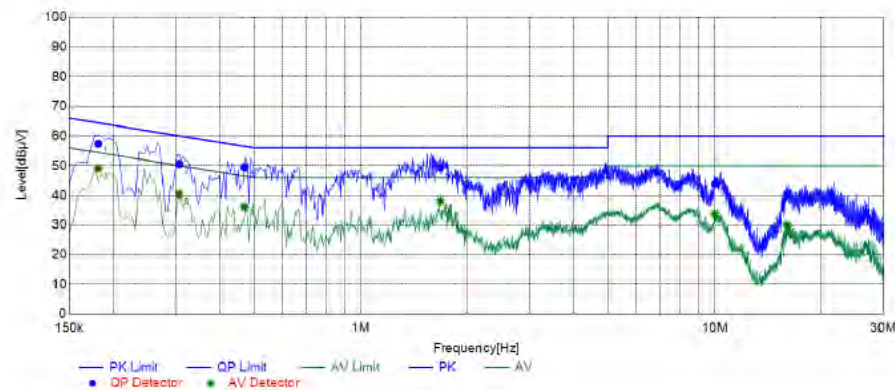

Final Data List

NO	Frequency [MHz]	QP Reading [dBμV]	AVG Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG Result [dBμV]	QP Limit [dBμV]	AVG Limit [dBμV]	QP Margin [dB]	AVG Margin [dB]	Line	Remark
1	0.1815	47.31	39.03	10.06	57.37	49.09	64.42	54.42	7.05	5.33	N	PASS
2	0.3075	40.62	30.33	9.98	50.60	40.31	60.04	50.04	9.44	9.73	N	PASS
3	0.4695	39.47	26.11	10.05	49.52	36.16	56.52	46.52	7.00	10.36	N	PASS
4	1.6800	39.28	28.06	10.13	49.41	38.19	56.00	46.00	6.59	7.81	N	PASS
5	10.0095	33.07	22.99	10.69	43.76	33.68	60.00	50.00	16.24	16.32	N	PASS
6	16.0260	29.36	18.84	11.12	40.48	29.96	60.00	50.00	19.52	20.04	N	PASS


Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

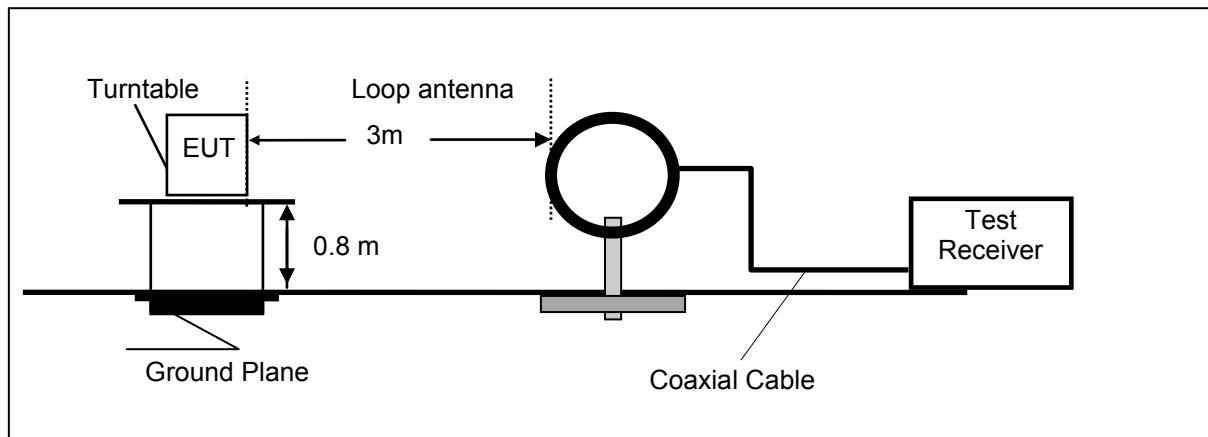

Frequency range 30MHz – 1000MHz

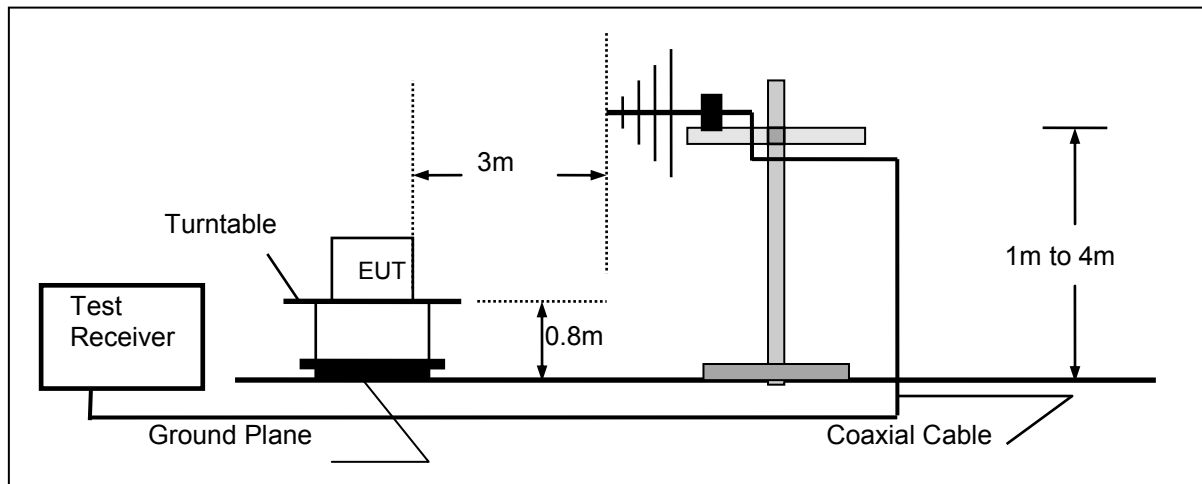

Frequency range above 1GHz

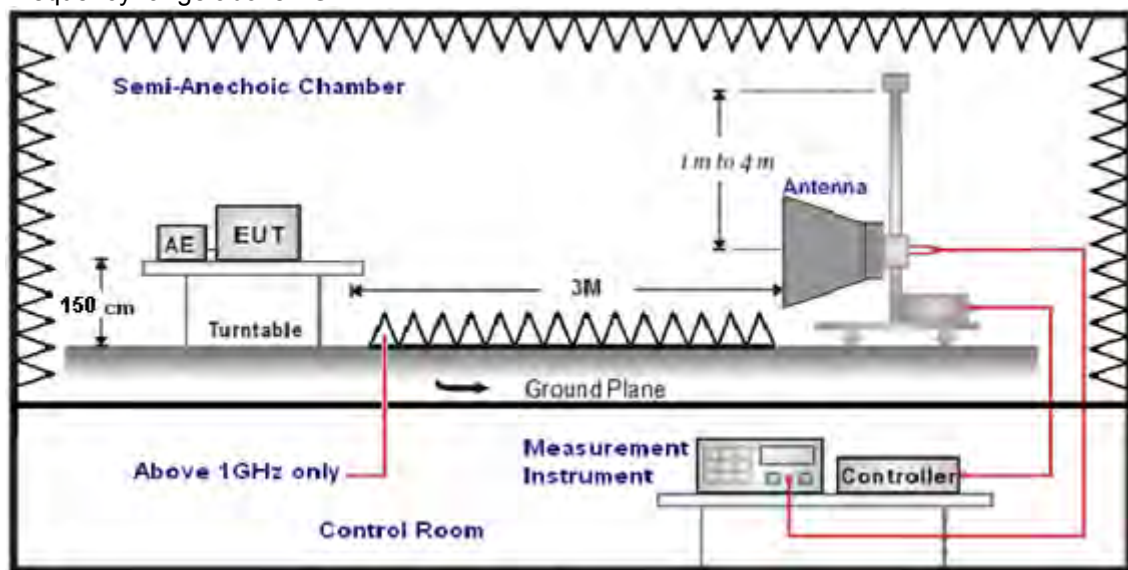

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 24MHz and maximum operation frequency was 5825MHz.so radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits


Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at all mode from 30MHz to 25GHz in AC 120V/60Hz and the worst case was recorded.


Temperature	23.4°C	Humidity	54.5%
Test Engineer	Moon Tan	Configurations	IEEE 802.11ac20 HCH

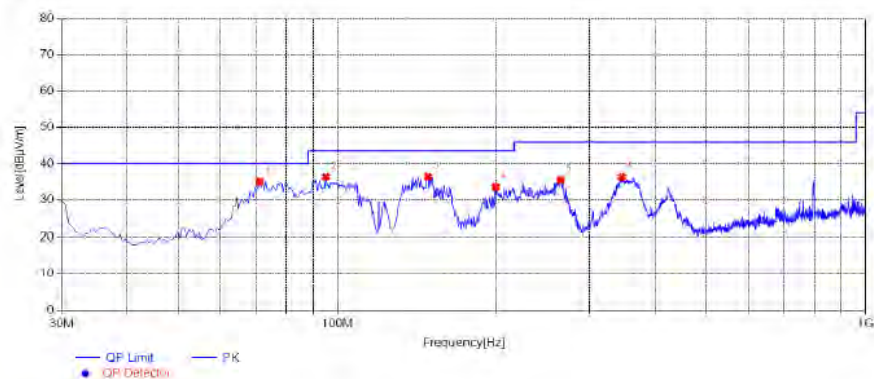For 30MHz-1GHz**Horizontal****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	71.2250	46.14	-11.10	35.04	40.00	4.96	100	344	PK	Horizontal	PASS
2	94.9900	45.79	-9.38	36.41	43.50	7.09	100	132	PK	Horizontal	PASS
3	148.3400	49.38	-12.91	36.47	43.50	7.03	100	248	PK	Horizontal	PASS
4	199.2650	42.57	-8.99	33.58	43.50	9.92	100	211	PK	Horizontal	PASS
5	264.7400	43.32	-7.83	35.49	46.00	10.51	100	293	PK	Horizontal	PASS
6	345.2500	41.92	-5.53	36.39	46.00	9.61	100	358	PK	Horizontal	PASS

Note: 1. Result (dBµV/m) = Reading (dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

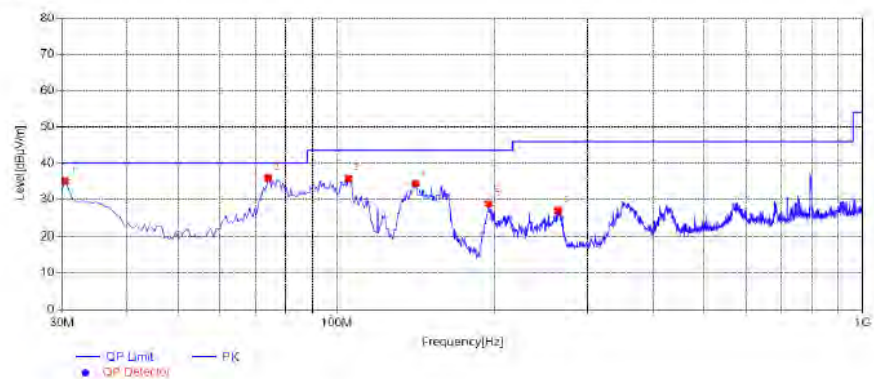Vertical**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.4850	46.44	-11.42	35.02	40.00	4.98	100	280	PK	Vertical	PASS
2	74.1350	48.74	-12.75	35.99	40.00	4.01	100	260	PK	Vertical	PASS
3	105.1750	43.96	-8.20	35.76	43.50	7.74	100	21	PK	Vertical	PASS
4	141.0650	46.61	-12.22	34.39	43.50	9.11	100	13	PK	Vertical	PASS
5	194.9000	38.23	-9.41	28.82	43.50	14.68	100	240	PK	Vertical	PASS
6	263.7700	34.67	-7.82	26.85	46.00	19.15	100	348	PK	Vertical	PASS

Note: 1. Result (dBµV/m) = Reading (dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 40GHz
5150-5250MHz:

802.11a Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.70	38.55	33.13	11.26	57.38	68.20	-10.82	Peak	Horizontal
1	10360	31.74	38.55	33.13	11.26	48.42	54.00	-5.58	AV	Horizontal
1	10360	41.78	38.55	33.13	11.26	58.46	68.20	-9.74	Peak	Vertical
1	10360	28.66	38.55	33.13	11.26	45.34	54.00	-8.66	AV	Vertical

802.11a Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.47	38.55	33.13	11.26	56.15	68.20	-12.05	Peak	Horizontal
1	10400	31.63	38.55	33.13	11.26	48.31	54.00	-5.69	AV	Horizontal
1	10400	41.37	38.55	33.13	11.26	58.05	68.20	-10.15	Peak	Vertical
1	10400	28.29	38.55	33.13	11.26	44.97	54.00	-9.03	AV	Vertical

802.11a Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	40.02	38.55	33.13	11.26	56.70	68.20	-11.50	Peak	Horizontal
1	10480	31.93	38.55	33.13	11.26	48.61	54.00	-5.39	AV	Horizontal
1	10480	41.49	38.55	33.13	11.26	58.17	68.20	-10.03	Peak	Vertical
1	10480	28.47	38.55	33.13	11.26	45.15	54.00	-8.85	AV	Vertical

802.11n20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.68	38.55	33.13	11.26	57.36	68.20	-10.84	Peak	Horizontal
1	10360	31.26	38.55	33.13	11.26	47.94	54.00	-6.06	AV	Horizontal
1	10360	40.61	38.55	33.13	11.26	57.29	68.20	-10.91	Peak	Vertical
1	10360	29.31	38.55	33.13	11.26	45.99	54.00	-8.01	AV	Vertical

802.11n20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	40.92	38.55	33.13	11.26	57.60	68.20	-10.60	Peak	Horizontal
1	10400	31.02	38.55	33.13	11.26	47.70	54.00	-6.30	AV	Horizontal
1	10400	41.17	38.55	33.13	11.26	57.85	68.20	-10.35	Peak	Vertical
1	10400	29.91	38.55	33.13	11.26	46.59	54.00	-7.41	AV	Vertical

802.11n20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.71	38.55	33.13	11.26	56.39	68.20	-11.81	Peak	Horizontal
1	10480	31.43	38.55	33.13	11.26	48.11	54.00	-5.89	AV	Horizontal
1	10480	41.14	38.55	33.13	11.26	57.82	68.20	-10.38	Peak	Vertical
1	10480	29.30	38.55	33.13	11.26	45.98	54.00	-8.02	AV	Vertical

802.11n40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.89	38.55	33.13	11.26	57.57	68.20	-10.63	Peak	Horizontal
1	10380	31.45	38.55	33.13	11.26	48.13	54.00	-5.87	AV	Horizontal
1	10380	41.21	38.55	33.13	11.26	57.89	68.20	-10.31	Peak	Vertical
1	10380	29.91	38.55	33.13	11.26	46.59	54.00	-7.41	AV	Vertical

802.11n40 Mode Channel 46 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	39.68	38.55	33.13	11.26	56.36	68.20	-11.84	Peak	Horizontal
1	10460	30.74	38.55	33.13	11.26	47.42	54.00	-6.58	AV	Horizontal
1	10460	40.80	38.55	33.13	11.26	57.48	68.20	-10.72	Peak	Vertical
1	10460	28.95	38.55	33.13	11.26	45.63	54.00	-8.37	AV	Vertical

802.11ac20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.32	38.55	33.13	11.26	57.00	68.20	-11.20	Peak	Horizontal
1	10360	31.59	38.55	33.13	11.26	48.27	54.00	-5.73	AV	Horizontal
1	10360	41.31	38.55	33.13	11.26	57.99	68.20	-10.21	Peak	Vertical
1	10360	28.27	38.55	33.13	11.26	44.95	54.00	-9.05	AV	Vertical

802.11ac20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.85	38.55	33.13	11.26	56.53	68.20	-11.67	Peak	Horizontal
1	10400	31.89	38.55	33.13	11.26	48.57	54.00	-5.43	AV	Horizontal
1	10400	41.14	38.55	33.13	11.26	57.82	68.20	-10.38	Peak	Vertical
1	10400	28.40	38.55	33.13	11.26	45.08	54.00	-8.92	AV	Vertical

802.11ac20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.03	38.55	33.13	11.26	55.71	68.20	-12.49	Peak	Horizontal
1	10480	30.29	38.55	33.13	11.26	46.97	54.00	-7.03	AV	Horizontal
1	10480	40.69	38.55	33.13	11.26	57.37	68.20	-10.83	Peak	Vertical
1	10480	29.26	38.55	33.13	11.26	45.94	54.00	-8.06	AV	Vertical

802.11ac40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.63	38.55	33.13	11.26	57.31	68.20	-10.89	Peak	Horizontal
1	10380	30.49	38.55	33.13	11.26	47.17	54.00	-6.83	AV	Horizontal
1	10380	41.48	38.55	33.13	11.26	58.16	68.20	-10.04	Peak	Vertical
1	10380	28.88	38.55	33.13	11.26	45.56	54.00	-8.44	AV	Vertical

802.11ac40 Mode_Channel 46_ 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.00	38.55	33.13	11.26	56.68	68.20	-11.52	Peak	Horizontal
1	10460	30.86	38.55	33.13	11.26	47.54	54.00	-6.46	AV	Horizontal
1	10460	40.32	38.55	33.13	11.26	57.00	68.20	-11.20	Peak	Vertical
1	10460	29.93	38.55	33.13	11.26	46.61	54.00	-7.39	AV	Vertical

802.11ac80 Mode_Channel 42_ 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	39.14	38.55	33.13	11.26	55.82	68.20	-12.38	Peak	Horizontal
1	10420	31.68	38.55	33.13	11.26	48.36	54.00	-5.64	AV	Horizontal
1	10420	41.85	38.55	33.13	11.26	58.53	68.20	-9.67	Peak	Vertical
1	10420	28.47	38.55	33.13	11.26	45.15	54.00	-8.85	AV	Vertical

802.11ax20 Mode_Channel 36_ 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.53	38.55	33.13	11.26	56.21	68.20	-11.99	Peak	Horizontal
1	10360	31.84	38.55	33.13	11.26	48.52	54.00	-5.48	AV	Horizontal
1	10360	40.98	38.55	33.13	11.26	57.66	68.20	-10.54	Peak	Vertical
1	10360	28.55	38.55	33.13	11.26	45.23	54.00	-8.77	AV	Vertical

802.11ax20 Mode_Channel 40_ 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	40.77	38.55	33.13	11.26	57.45	68.20	-10.75	Peak	Horizontal
1	10400	30.41	38.55	33.13	11.26	47.09	54.00	-6.91	AV	Horizontal
1	10400	40.60	38.55	33.13	11.26	57.28	68.20	-10.92	Peak	Vertical
1	10400	28.76	38.55	33.13	11.26	45.44	54.00	-8.56	AV	Vertical

802.11ax20 Mode_Channel 48_ 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	40.68	38.55	33.13	11.26	57.36	68.20	-10.84	Peak	Horizontal
1	10480	31.52	38.55	33.13	11.26	48.20	54.00	-5.80	AV	Horizontal
1	10480	40.51	38.55	33.13	11.26	57.19	68.20	-11.01	Peak	Vertical
1	10480	29.25	38.55	33.13	11.26	45.93	54.00	-8.07	AV	Vertical

802.11ax40 Mode_Channel 38_ 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	39.57	38.55	33.13	11.26	56.25	68.20	-11.95	Peak	Horizontal
1	10380	30.59	38.55	33.13	11.26	47.27	54.00	-6.73	AV	Horizontal
1	10380	40.81	38.55	33.13	11.26	57.49	68.20	-10.71	Peak	Vertical
1	10380	29.00	38.55	33.13	11.26	45.68	54.00	-8.32	AV	Vertical

802.11ax40 Mode_Channel 46_ 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	39.21	38.55	33.13	11.26	55.89	68.20	-12.31	Peak	Horizontal
1	10460	31.26	38.55	33.13	11.26	47.94	54.00	-6.06	AV	Horizontal
1	10460	40.46	38.55	33.13	11.26	57.14	68.20	-11.06	Peak	Vertical
1	10460	28.88	38.55	33.13	11.26	45.56	54.00	-8.44	AV	Vertical

802.11ax80 Mode_Channel 42_ 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	40.66	38.55	33.13	11.26	57.34	68.20	-10.86	Peak	Horizontal
1	10420	30.17	38.55	33.13	11.26	46.85	54.00	-7.15	AV	Horizontal
1	10420	41.09	38.55	33.13	11.26	57.77	68.20	-10.43	Peak	Vertical
1	10420	28.30	38.55	33.13	11.26	44.98	54.00	-9.02	AV	Vertical

NOTE: We measured Radiated Emission at Antenna 5 & Antenna 6& Antenna 7& Antenna 8 mode from 1GHz to 25GHz and the worst case was recorded.

5725-5850MHz:

802.11a Mode_Channel 149_ 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.57	38.55	33.13	11.26	57.25	68.20	-10.95	Peak	Horizontal
1	11490	30.05	38.55	33.13	11.26	46.73	54.00	-7.27	AV	Horizontal
1	11490	41.64	38.55	33.13	11.26	58.32	68.20	-9.88	Peak	Vertical
1	11490	28.39	38.55	33.13	11.26	45.07	54.00	-8.93	AV	Vertical

802.11a Mode_Channel 157_ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.03	38.55	33.13	11.26	56.71	68.20	-11.49	Peak	Horizontal
1	11570	30.40	38.55	33.13	11.26	47.08	54.00	-6.92	AV	Horizontal
1	11570	40.88	38.55	33.13	11.26	57.56	68.20	-10.64	Peak	Vertical
1	11570	29.28	38.55	33.13	11.26	45.96	54.00	-8.04	AV	Vertical

802.11a Mode_Channel 165_ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.02	38.55	33.13	11.26	55.70	68.20	-12.50	Peak	Horizontal
1	11650	30.20	38.55	33.13	11.26	46.88	54.00	-7.12	AV	Horizontal
1	11650	40.54	38.55	33.13	11.26	57.22	68.20	-10.98	Peak	Vertical
1	11650	29.44	38.55	33.13	11.26	46.12	54.00	-7.88	AV	Vertical

802.11n20 Mode_Channel 149_ 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.35	38.55	33.13	11.26	57.03	68.20	-11.17	Peak	Horizontal
1	11490	30.55	38.55	33.13	11.26	47.23	54.00	-6.77	AV	Horizontal
1	11490	40.45	38.55	33.13	11.26	57.13	68.20	-11.07	Peak	Vertical
1	11490	29.10	38.55	33.13	11.26	45.78	54.00	-8.22	AV	Vertical

802.11n20 Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.90	38.55	33.13	11.26	57.58	68.20	-10.62	Peak	Horizontal
1	11570	31.14	38.55	33.13	11.26	47.82	54.00	-6.18	AV	Horizontal
1	11570	40.48	38.55	33.13	11.26	57.16	68.20	-11.04	Peak	Vertical
1	11570	28.79	38.55	33.13	11.26	45.47	54.00	-8.53	AV	Vertical

802.11n20 Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.15	38.55	33.13	11.26	55.83	68.20	-12.37	Peak	Horizontal
1	11650	31.36	38.55	33.13	11.26	48.04	54.00	-5.96	AV	Horizontal
1	11650	40.88	38.55	33.13	11.26	57.56	68.20	-10.64	Peak	Vertical
1	11650	28.43	38.55	33.13	11.26	45.11	54.00	-8.89	AV	Vertical

802.11n40 Mode Channel 151 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.37	38.55	33.13	11.26	56.05	68.20	-12.15	Peak	Horizontal
1	11510	30.50	38.55	33.13	11.26	47.18	54.00	-6.82	AV	Horizontal
1	11510	40.96	38.55	33.13	11.26	57.64	68.20	-10.56	Peak	Vertical
1	11510	29.06	38.55	33.13	11.26	45.74	54.00	-8.26	AV	Vertical

802.11n40 Mode Channel 159 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	39.26	38.55	33.13	11.26	55.94	68.20	-12.26	Peak	Horizontal
1	11590	31.35	38.55	33.13	11.26	48.03	54.00	-5.97	AV	Horizontal
1	11590	40.58	38.55	33.13	11.26	57.26	68.20	-10.94	Peak	Vertical
1	11590	29.88	38.55	33.13	11.26	46.56	54.00	-7.44	AV	Vertical

802.11ac20 Mode Channel 149 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.20	38.55	33.13	11.26	55.88	68.20	-12.32	Peak	Horizontal
1	11490	30.55	38.55	33.13	11.26	47.23	54.00	-6.77	AV	Horizontal
1	11490	41.48	38.55	33.13	11.26	58.16	68.20	-10.04	Peak	Vertical
1	11490	28.40	38.55	33.13	11.26	45.08	54.00	-8.92	AV	Vertical

802.11ac20 Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.59	38.55	33.13	11.26	57.27	68.20	-10.93	Peak	Horizontal
1	11570	31.11	38.55	33.13	11.26	47.79	54.00	-6.21	AV	Horizontal
1	11570	40.57	38.55	33.13	11.26	57.25	68.20	-10.95	Peak	Vertical
1	11570	29.65	38.55	33.13	11.26	46.33	54.00	-7.67	AV	Vertical

802.11ac20 Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.93	38.55	33.13	11.26	56.61	68.20	-11.59	Peak	Horizontal
1	11650	31.21	38.55	33.13	11.26	47.89	54.00	-6.11	AV	Horizontal
1	11650	40.51	38.55	33.13	11.26	57.19	68.20	-11.01	Peak	Vertical
1	11650	29.24	38.55	33.13	11.26	45.92	54.00	-8.08	AV	Vertical

802.11ac40 Mode Channel 151 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	40.63	38.55	33.13	11.26	57.31	68.20	-10.89	Peak	Horizontal
1	11510	30.60	38.55	33.13	11.26	47.28	54.00	-6.72	AV	Horizontal
1	11510	41.59	38.55	33.13	11.26	58.27	68.20	-9.93	Peak	Vertical
1	11510	28.37	38.55	33.13	11.26	45.05	54.00	-8.95	AV	Vertical

802.11ac40 Mode Channel 159 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.42	38.55	33.13	11.26	57.10	68.20	-11.10	Peak	Horizontal
1	11590	30.61	38.55	33.13	11.26	47.29	54.00	-6.71	AV	Horizontal
1	11590	40.76	38.55	33.13	11.26	57.44	68.20	-10.76	Peak	Vertical
1	11590	28.25	38.55	33.13	11.26	44.93	54.00	-9.07	AV	Vertical

802.11ac80 Mode Channel 155 5775 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	40.16	38.55	33.13	11.26	56.84	68.20	-11.36	Peak	Horizontal
1	11550	30.30	38.55	33.13	11.26	46.98	54.00	-7.02	AV	Horizontal
1	11550	40.23	38.55	33.13	11.26	56.91	68.20	-11.29	Peak	Vertical
1	11550	29.66	38.55	33.13	11.26	46.34	54.00	-7.66	AV	Vertical

802.11ax20 Mode Channel 149 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.13	38.55	33.13	11.26	55.81	68.20	-12.39	Peak	Horizontal
1	11490	31.28	38.55	33.13	11.26	47.96	54.00	-6.04	AV	Horizontal
1	11490	40.36	38.55	33.13	11.26	57.04	68.20	-11.16	Peak	Vertical
1	11490	29.67	38.55	33.13	11.26	46.35	54.00	-7.65	AV	Vertical

802.11ax20 Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.62	38.55	33.13	11.26	57.30	68.20	-10.90	Peak	Horizontal
1	11570	30.49	38.55	33.13	11.26	47.17	54.00	-6.83	AV	Horizontal
1	11570	40.42	38.55	33.13	11.26	57.10	68.20	-11.10	Peak	Vertical
1	11570	28.83	38.55	33.13	11.26	45.51	54.00	-8.49	AV	Vertical

802.11ax20 Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.62	38.55	33.13	11.26	57.30	68.20	-10.90	Peak	Horizontal
1	11650	31.94	38.55	33.13	11.26	48.62	54.00	-5.38	AV	Horizontal
1	11650	41.27	38.55	33.13	11.26	57.95	68.20	-10.25	Peak	Vertical
1	11650	29.73	38.55	33.13	11.26	46.41	54.00	-7.59	AV	Vertical

802.11ax40 Mode Channel 151 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	40.12	38.55	33.13	11.26	56.80	68.20	-11.40	Peak	Horizontal
1	11510	30.84	38.55	33.13	11.26	47.52	54.00	-6.48	AV	Horizontal
1	11510	41.22	38.55	33.13	11.26	57.90	68.20	-10.30	Peak	Vertical
1	11510	29.98	38.55	33.13	11.26	46.66	54.00	-7.34	AV	Vertical

802.11ax40 Mode Channel 159 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	39.80	38.55	33.13	11.26	56.48	68.20	-11.72	Peak	Horizontal
1	11590	30.96	38.55	33.13	11.26	47.64	54.00	-6.36	AV	Horizontal
1	11590	41.19	38.55	33.13	11.26	57.87	68.20	-10.33	Peak	Vertical
1	11590	28.08	38.55	33.13	11.26	44.76	54.00	-9.24	AV	Vertical

802.11ax80 Mode Channel 155 5775 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	39.15	38.55	33.13	11.26	55.83	68.20	-12.37	Peak	Horizontal
1	11550	31.95	38.55	33.13	11.26	48.63	54.00	-5.37	AV	Horizontal
1	11550	41.92	38.55	33.13	11.26	58.60	68.20	-9.60	Peak	Vertical
1	11550	29.57	38.55	33.13	11.26	46.25	54.00	-7.75	AV	Vertical

NOTE: We measured Radiated Emission at Antenna 1 & Antenna 2& Antenna 3& Antenna 4 mode from 1GHz to 25GHz and the worst case was recorded.

4*4MIMO:

For 1GHz to 40GHz

5150-5250MHz:

802.11a Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.44	38.55	33.13	11.26	56.12	68.20	-12.08	Peak	Horizontal
1	10360	31.09	38.55	33.13	11.26	47.77	54.00	-6.23	AV	Horizontal
1	10360	40.00	38.55	33.13	11.26	56.68	68.20	-11.52	Peak	Vertical
1	10360	28.44	38.55	33.13	11.26	45.12	54.00	-8.88	AV	Vertical

802.11a Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.86	38.55	33.13	11.26	56.54	68.20	-11.66	Peak	Horizontal
1	10400	30.31	38.55	33.13	11.26	46.99	54.00	-7.01	AV	Horizontal
1	10400	40.35	38.55	33.13	11.26	57.03	68.20	-11.17	Peak	Vertical
1	10400	29.40	38.55	33.13	11.26	46.08	54.00	-7.92	AV	Vertical

802.11a Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.66	38.55	33.13	11.26	56.34	68.20	-11.86	Peak	Horizontal
1	10480	30.59	38.55	33.13	11.26	47.27	54.00	-6.73	AV	Horizontal
1	10480	41.55	38.55	33.13	11.26	58.23	68.20	-9.97	Peak	Vertical
1	10480	28.02	38.55	33.13	11.26	44.70	54.00	-9.30	AV	Vertical

802.11n20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.03	38.55	33.13	11.26	56.71	68.20	-11.49	Peak	Horizontal
1	10360	30.69	38.55	33.13	11.26	47.37	54.00	-6.63	AV	Horizontal
1	10360	40.14	38.55	33.13	11.26	56.82	68.20	-11.38	Peak	Vertical
1	10360	28.65	38.55	33.13	11.26	45.33	54.00	-8.67	AV	Vertical

802.11n20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.33	38.55	33.13	11.26	56.01	68.20	-12.19	Peak	Horizontal
1	10400	31.88	38.55	33.13	11.26	48.56	54.00	-5.44	AV	Horizontal
1	10400	41.24	38.55	33.13	11.26	57.92	68.20	-10.28	Peak	Vertical
1	10400	29.89	38.55	33.13	11.26	46.57	54.00	-7.43	AV	Vertical

802.11n20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.91	38.55	33.13	11.26	56.59	68.20	-11.61	Peak	Horizontal
1	10480	30.63	38.55	33.13	11.26	47.31	54.00	-6.69	AV	Horizontal
1	10480	41.98	38.55	33.13	11.26	58.66	68.20	-9.54	Peak	Vertical
1	10480	29.19	38.55	33.13	11.26	45.87	54.00	-8.13	AV	Vertical

802.11n40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	39.15	38.55	33.13	11.26	55.83	68.20	-12.37	Peak	Horizontal
1	10380	30.82	38.55	33.13	11.26	47.50	54.00	-6.50	AV	Horizontal
1	10380	40.50	38.55	33.13	11.26	57.18	68.20	-11.02	Peak	Vertical
1	10380	29.17	38.55	33.13	11.26	45.85	54.00	-8.15	AV	Vertical

802.11n40 Mode Channel 46 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	39.46	38.55	33.13	11.26	56.14	68.20	-12.06	Peak	Horizontal
1	10460	30.62	38.55	33.13	11.26	47.30	54.00	-6.70	AV	Horizontal
1	10460	41.32	38.55	33.13	11.26	58.00	68.20	-10.20	Peak	Vertical
1	10460	29.42	38.55	33.13	11.26	46.10	54.00	-7.90	AV	Vertical

802.11ac20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.02	38.55	33.13	11.26	55.70	68.20	-12.50	Peak	Horizontal
1	10360	30.73	38.55	33.13	11.26	47.41	54.00	-6.59	AV	Horizontal
1	10360	41.53	38.55	33.13	11.26	58.21	68.20	-9.99	Peak	Vertical
1	10360	29.64	38.55	33.13	11.26	46.32	54.00	-7.68	AV	Vertical

802.11ac20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Margin (dB)	Detector	Polarization
-------------	------------	------------	----------------	------------	------------	--------------	------------	-------------	----------	--------------

		(dBμV)	(dB/m)	dB	(dB)	(dBμV/m)	(dBμV/m)			
1	10400	39.26	38.55	33.13	11.26	55.94	68.20	-12.26	Peak	Horizontal
1	10400	30.71	38.55	33.13	11.26	47.39	54.00	-6.61	AV	Horizontal
1	10400	41.16	38.55	33.13	11.26	57.84	68.20	-10.36	Peak	Vertical
1	10400	28.27	38.55	33.13	11.26	44.95	54.00	-9.05	AV	Vertical

802.11ac20 Mode_Channel 48_ 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.31	38.55	33.13	11.26	55.99	68.20	-12.21	Peak	Horizontal
1	10480	31.51	38.55	33.13	11.26	48.19	54.00	-5.81	AV	Horizontal
1	10480	41.68	38.55	33.13	11.26	58.36	68.20	-9.84	Peak	Vertical
1	10480	29.96	38.55	33.13	11.26	46.64	54.00	-7.36	AV	Vertical

802.11ac40 Mode_Channel 38_ 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	39.49	38.55	33.13	11.26	56.17	68.20	-12.03	Peak	Horizontal
1	10380	31.19	38.55	33.13	11.26	47.87	54.00	-6.13	AV	Horizontal
1	10380	41.75	38.55	33.13	11.26	58.43	68.20	-9.77	Peak	Vertical
1	10380	29.56	38.55	33.13	11.26	46.24	54.00	-7.76	AV	Vertical

802.11ac40 Mode_Channel 46_ 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.51	38.55	33.13	11.26	57.19	68.20	-11.01	Peak	Horizontal
1	10460	30.78	38.55	33.13	11.26	47.46	54.00	-6.54	AV	Horizontal
1	10460	41.60	38.55	33.13	11.26	58.28	68.20	-9.92	Peak	Vertical
1	10460	28.73	38.55	33.13	11.26	45.41	54.00	-8.59	AV	Vertical

802.11ac80 Mode_Channel 42_ 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	40.38	38.55	33.13	11.26	57.06	68.20	-11.14	Peak	Horizontal
1	10420	31.15	38.55	33.13	11.26	47.83	54.00	-6.17	AV	Horizontal
1	10420	41.06	38.55	33.13	11.26	57.74	68.20	-10.46	Peak	Vertical
1	10420	28.85	38.55	33.13	11.26	45.53	54.00	-8.47	AV	Vertical

802.11ax20 Mode_Channel 36_ 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.47	38.55	33.13	11.26	56.15	68.20	-12.05	Peak	Horizontal
1	10360	30.87	38.55	33.13	11.26	47.55	54.00	-6.45	AV	Horizontal
1	10360	40.80	38.55	33.13	11.26	57.48	68.20	-10.72	Peak	Vertical
1	10360	29.41	38.55	33.13	11.26	46.09	54.00	-7.91	AV	Vertical

802.11ax20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.51	38.55	33.13	11.26	56.19	68.20	-12.01	Peak	Horizontal
1	10400	30.18	38.55	33.13	11.26	46.86	54.00	-7.14	AV	Horizontal
1	10400	41.23	38.55	33.13	11.26	57.91	68.20	-10.29	Peak	Vertical
1	10400	28.94	38.55	33.13	11.26	45.62	54.00	-8.38	AV	Vertical

802.11ax20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.88	38.55	33.13	11.26	56.56	68.20	-11.64	Peak	Horizontal
1	10480	30.27	38.55	33.13	11.26	46.95	54.00	-7.05	AV	Horizontal
1	10480	41.40	38.55	33.13	11.26	58.08	68.20	-10.12	Peak	Vertical
1	10480	28.41	38.55	33.13	11.26	45.09	54.00	-8.91	AV	Vertical

802.11ax40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.36	38.55	33.13	11.26	57.04	68.20	-11.16	Peak	Horizontal
1	10380	31.73	38.55	33.13	11.26	48.41	54.00	-5.59	AV	Horizontal
1	10380	40.37	38.55	33.13	11.26	57.05	68.20	-11.15	Peak	Vertical
1	10380	28.73	38.55	33.13	11.26	45.41	54.00	-8.59	AV	Vertical

802.11ax40 Mode Channel 46 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.07	38.55	33.13	11.26	56.75	68.20	-11.45	Peak	Horizontal
1	10460	31.36	38.55	33.13	11.26	48.04	54.00	-5.96	AV	Horizontal
1	10460	41.28	38.55	33.13	11.26	57.96	68.20	-10.24	Peak	Vertical
1	10460	28.95	38.55	33.13	11.26	45.63	54.00	-8.37	AV	Vertical

802.11ax80 Mode Channel 42 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	39.01	38.55	33.13	11.26	55.69	68.20	-12.51	Peak	Horizontal
1	10420	31.75	38.55	33.13	11.26	48.43	54.00	-5.57	AV	Horizontal
1	10420	40.37	38.55	33.13	11.26	57.05	68.20	-11.15	Peak	Vertical
1	10420	29.62	38.55	33.13	11.26	46.30	54.00	-7.70	AV	Vertical

5725-5850MHz:**802.11a Mode_Channel 149_5745 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.76	38.55	33.13	11.26	56.44	68.20	-11.76	Peak	Horizontal
1	11490	31.25	38.55	33.13	11.26	47.93	54.00	-6.07	AV	Horizontal
1	11490	41.93	38.55	33.13	11.26	58.61	68.20	-9.59	Peak	Vertical
1	11490	28.17	38.55	33.13	11.26	44.85	54.00	-9.15	AV	Vertical

802.11a Mode_Channel 157_5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.61	38.55	33.13	11.26	57.29	68.20	-10.91	Peak	Horizontal
1	11570	30.77	38.55	33.13	11.26	47.45	54.00	-6.55	AV	Horizontal
1	11570	40.78	38.55	33.13	11.26	57.46	68.20	-10.74	Peak	Vertical
1	11570	28.28	38.55	33.13	11.26	44.96	54.00	-9.04	AV	Vertical

802.11a Mode_Channel 165_5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.94	38.55	33.13	11.26	56.62	68.20	-11.58	Peak	Horizontal
1	11650	30.50	38.55	33.13	11.26	47.18	54.00	-6.82	AV	Horizontal
1	11650	40.34	38.55	33.13	11.26	57.02	68.20	-11.18	Peak	Vertical
1	11650	28.00	38.55	33.13	11.26	44.68	54.00	-9.32	AV	Vertical

802.11n20 Mode_Channel 149_5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.31	38.55	33.13	11.26	55.99	68.20	-12.21	Peak	Horizontal
1	11490	30.96	38.55	33.13	11.26	47.64	54.00	-6.36	AV	Horizontal
1	11490	41.11	38.55	33.13	11.26	57.79	68.20	-10.41	Peak	Vertical
1	11490	29.41	38.55	33.13	11.26	46.09	54.00	-7.91	AV	Vertical

802.11n20 Mode_Channel 157_5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.79	38.55	33.13	11.26	57.47	68.20	-10.73	Peak	Horizontal
1	11570	30.31	38.55	33.13	11.26	46.99	54.00	-7.01	AV	Horizontal
1	11570	40.53	38.55	33.13	11.26	57.21	68.20	-10.99	Peak	Vertical
1	11570	28.13	38.55	33.13	11.26	44.81	54.00	-9.19	AV	Vertical

802.11n20 Mode_Channel 165_5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.81	38.55	33.13	11.26	57.49	68.20	-10.71	Peak	Horizontal
1	11650	30.97	38.55	33.13	11.26	47.65	54.00	-6.35	AV	Horizontal
1	11650	40.34	38.55	33.13	11.26	57.02	68.20	-11.18	Peak	Vertical
1	11650	29.41	38.55	33.13	11.26	46.09	54.00	-7.91	AV	Vertical

802.11n40 Mode Channel 151 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.04	38.55	33.13	11.26	55.72	68.20	-12.48	Peak	Horizontal
1	11510	31.74	38.55	33.13	11.26	48.42	54.00	-5.58	AV	Horizontal
1	11510	41.33	38.55	33.13	11.26	58.01	68.20	-10.19	Peak	Vertical
1	11510	28.02	38.55	33.13	11.26	44.70	54.00	-9.30	AV	Vertical

802.11n40 Mode Channel 159 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.39	38.55	33.13	11.26	57.07	68.20	-11.13	Peak	Horizontal
1	11590	31.78	38.55	33.13	11.26	48.46	54.00	-5.54	AV	Horizontal
1	11590	40.87	38.55	33.13	11.26	57.55	68.20	-10.65	Peak	Vertical
1	11590	28.63	38.55	33.13	11.26	45.31	54.00	-8.69	AV	Vertical

802.11ac20 Mode Channel 149 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.55	38.55	33.13	11.26	57.23	68.20	-10.97	Peak	Horizontal
1	11490	30.36	38.55	33.13	11.26	47.04	54.00	-6.96	AV	Horizontal
1	11490	41.14	38.55	33.13	11.26	57.82	68.20	-10.38	Peak	Vertical
1	11490	28.19	38.55	33.13	11.26	44.87	54.00	-9.13	AV	Vertical

802.11ac20 Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.77	38.55	33.13	11.26	56.45	68.20	-11.75	Peak	Horizontal
1	11570	30.89	38.55	33.13	11.26	47.57	54.00	-6.43	AV	Horizontal
1	11570	40.50	38.55	33.13	11.26	57.18	68.20	-11.02	Peak	Vertical
1	11570	29.12	38.55	33.13	11.26	45.80	54.00	-8.20	AV	Vertical

802.11ac20 Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.52	38.55	33.13	11.26	57.20	68.20	-11.00	Peak	Horizontal
1	11650	30.85	38.55	33.13	11.26	47.53	54.00	-6.47	AV	Horizontal
1	11650	40.23	38.55	33.13	11.26	56.91	68.20	-11.29	Peak	Vertical
1	11650	28.37	38.55	33.13	11.26	45.05	54.00	-8.95	AV	Vertical

802.11ac40 Mode Channel 151 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.53	38.55	33.13	11.26	56.21	68.20	-11.99	Peak	Horizontal
1	11510	31.63	38.55	33.13	11.26	48.31	54.00	-5.69	AV	Horizontal
1	11510	41.13	38.55	33.13	11.26	57.81	68.20	-10.39	Peak	Vertical
1	11510	29.90	38.55	33.13	11.26	46.58	54.00	-7.42	AV	Vertical

802.11ac40 Mode Channel 159 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	39.95	38.55	33.13	11.26	56.63	68.20	-11.57	Peak	Horizontal
1	11590	30.63	38.55	33.13	11.26	47.31	54.00	-6.69	AV	Horizontal
1	11590	41.38	38.55	33.13	11.26	58.06	68.20	-10.14	Peak	Vertical
1	11590	28.38	38.55	33.13	11.26	45.06	54.00	-8.94	AV	Vertical

802.11ac80 Mode Channel 155 _5775 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	39.83	38.55	33.13	11.26	56.51	68.20	-11.69	Peak	Horizontal
1	11550	31.40	38.55	33.13	11.26	48.08	54.00	-5.92	AV	Horizontal
1	11550	41.07	38.55	33.13	11.26	57.75	68.20	-10.45	Peak	Vertical
1	11550	29.71	38.55	33.13	11.26	46.39	54.00	-7.61	AV	Vertical

802.11ax20 Mode Channel 149 _5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.74	38.55	33.13	11.26	57.42	68.20	-10.78	Peak	Horizontal
1	11490	31.34	38.55	33.13	11.26	48.02	54.00	-5.98	AV	Horizontal
1	11490	41.33	38.55	33.13	11.26	58.01	68.20	-10.19	Peak	Vertical
1	11490	29.35	38.55	33.13	11.26	46.03	54.00	-7.97	AV	Vertical

802.11ax20 Mode Channel 157 _5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.82	38.55	33.13	11.26	56.50	68.20	-11.70	Peak	Horizontal
1	11570	30.84	38.55	33.13	11.26	47.52	54.00	-6.48	AV	Horizontal
1	11570	41.79	38.55	33.13	11.26	58.47	68.20	-9.73	Peak	Vertical
1	11570	28.23	38.55	33.13	11.26	44.91	54.00	-9.09	AV	Vertical

802.11ax20 Mode Channel 165 _5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.97	38.55	33.13	11.26	56.65	68.20	-11.55	Peak	Horizontal
1	11650	30.14	38.55	33.13	11.26	46.82	54.00	-7.18	AV	Horizontal
1	11650	41.31	38.55	33.13	11.26	57.99	68.20	-10.21	Peak	Vertical
1	11650	28.18	38.55	33.13	11.26	44.86	54.00	-9.14	AV	Vertical

802.11ax40 Mode Channel 151 _5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	40.20	38.55	33.13	11.26	56.88	68.20	-11.32	Peak	Horizontal
1	11510	30.52	38.55	33.13	11.26	47.20	54.00	-6.80	AV	Horizontal
1	11510	40.47	38.55	33.13	11.26	57.15	68.20	-11.05	Peak	Vertical
1	11510	29.89	38.55	33.13	11.26	46.57	54.00	-7.43	AV	Vertical

802.11ax40 Mode Channel 159 _5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.37	38.55	33.13	11.26	57.05	68.20	-11.15	Peak	Horizontal
1	11590	30.90	38.55	33.13	11.26	47.58	54.00	-6.42	AV	Horizontal
1	11590	41.98	38.55	33.13	11.26	58.66	68.20	-9.54	Peak	Vertical
1	11590	28.71	38.55	33.13	11.26	45.39	54.00	-8.61	AV	Vertical

802.11ax80 Mode Channel 155 5775 MHz


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	39.89	38.55	33.13	11.26	56.57	68.20	-11.63	Peak	Horizontal
1	11550	30.96	38.55	33.13	11.26	47.64	54.00	-6.36	AV	Horizontal
1	11550	40.92	38.55	33.13	11.26	57.60	68.20	-10.60	Peak	Vertical
1	11550	28.96	38.55	33.13	11.26	45.64	54.00	-8.36	AV	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. Margin = Result Level - Limit
3. The other emission levels were very low against the limit.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

4.3. Duty Cycle

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 B Duty Cycle (x), Transmission Duration (T):

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal
- The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zerospan measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

Temperature	23.6°C	Humidity	55.7%
Test Engineer	Moon Tan	Configurations	IEEE 802.11a/n/ac

Antenna 5:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.84	0.76

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.69	1.61

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.87	0.60

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.72	1.43

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.76	1.19

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.60	2.22

Antenna 1:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.89	0.51

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.96	0.18

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.96	0.18

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.96	0.18

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.76	1.19

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.96	0.18

Antenna 6:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.87	0.60

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.74	1.31

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.84	0.76

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.84	0.76

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.82	0.86

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.88	0.56

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.60	2.22

Antenna 2:

5725-5850MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.96	0.18

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.96	0.18

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.96	0.18

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.96	0.18

**Antenna 7:
5150-5250MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.97	0.13

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.84	0.76

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.77	1.14

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.82	0.86

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.72	1.43

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.77	1.14

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.85	0.71

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.84	0.76

Antenna 3:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.97	0.13

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.96	0.18

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.96	0.18

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.95	0.22

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.95	0.22

Antenna 8:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.97	0.13

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.78	1.08

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.89	0.51

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.71	1.49

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	0.89	0.51

802.11ax40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	0.73	1.37

802.11ax80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	0.68	1.67

Antenna 4:

5725-5850MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.97	0.13

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.95	0.22

802.11ax20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	0.95	0.22


802.11ax40 Test Mode




Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	0.95	0.22

802.11ax80 Test Mode


Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	0.95	0.22


Antenna 5:
5150-5250MHz:

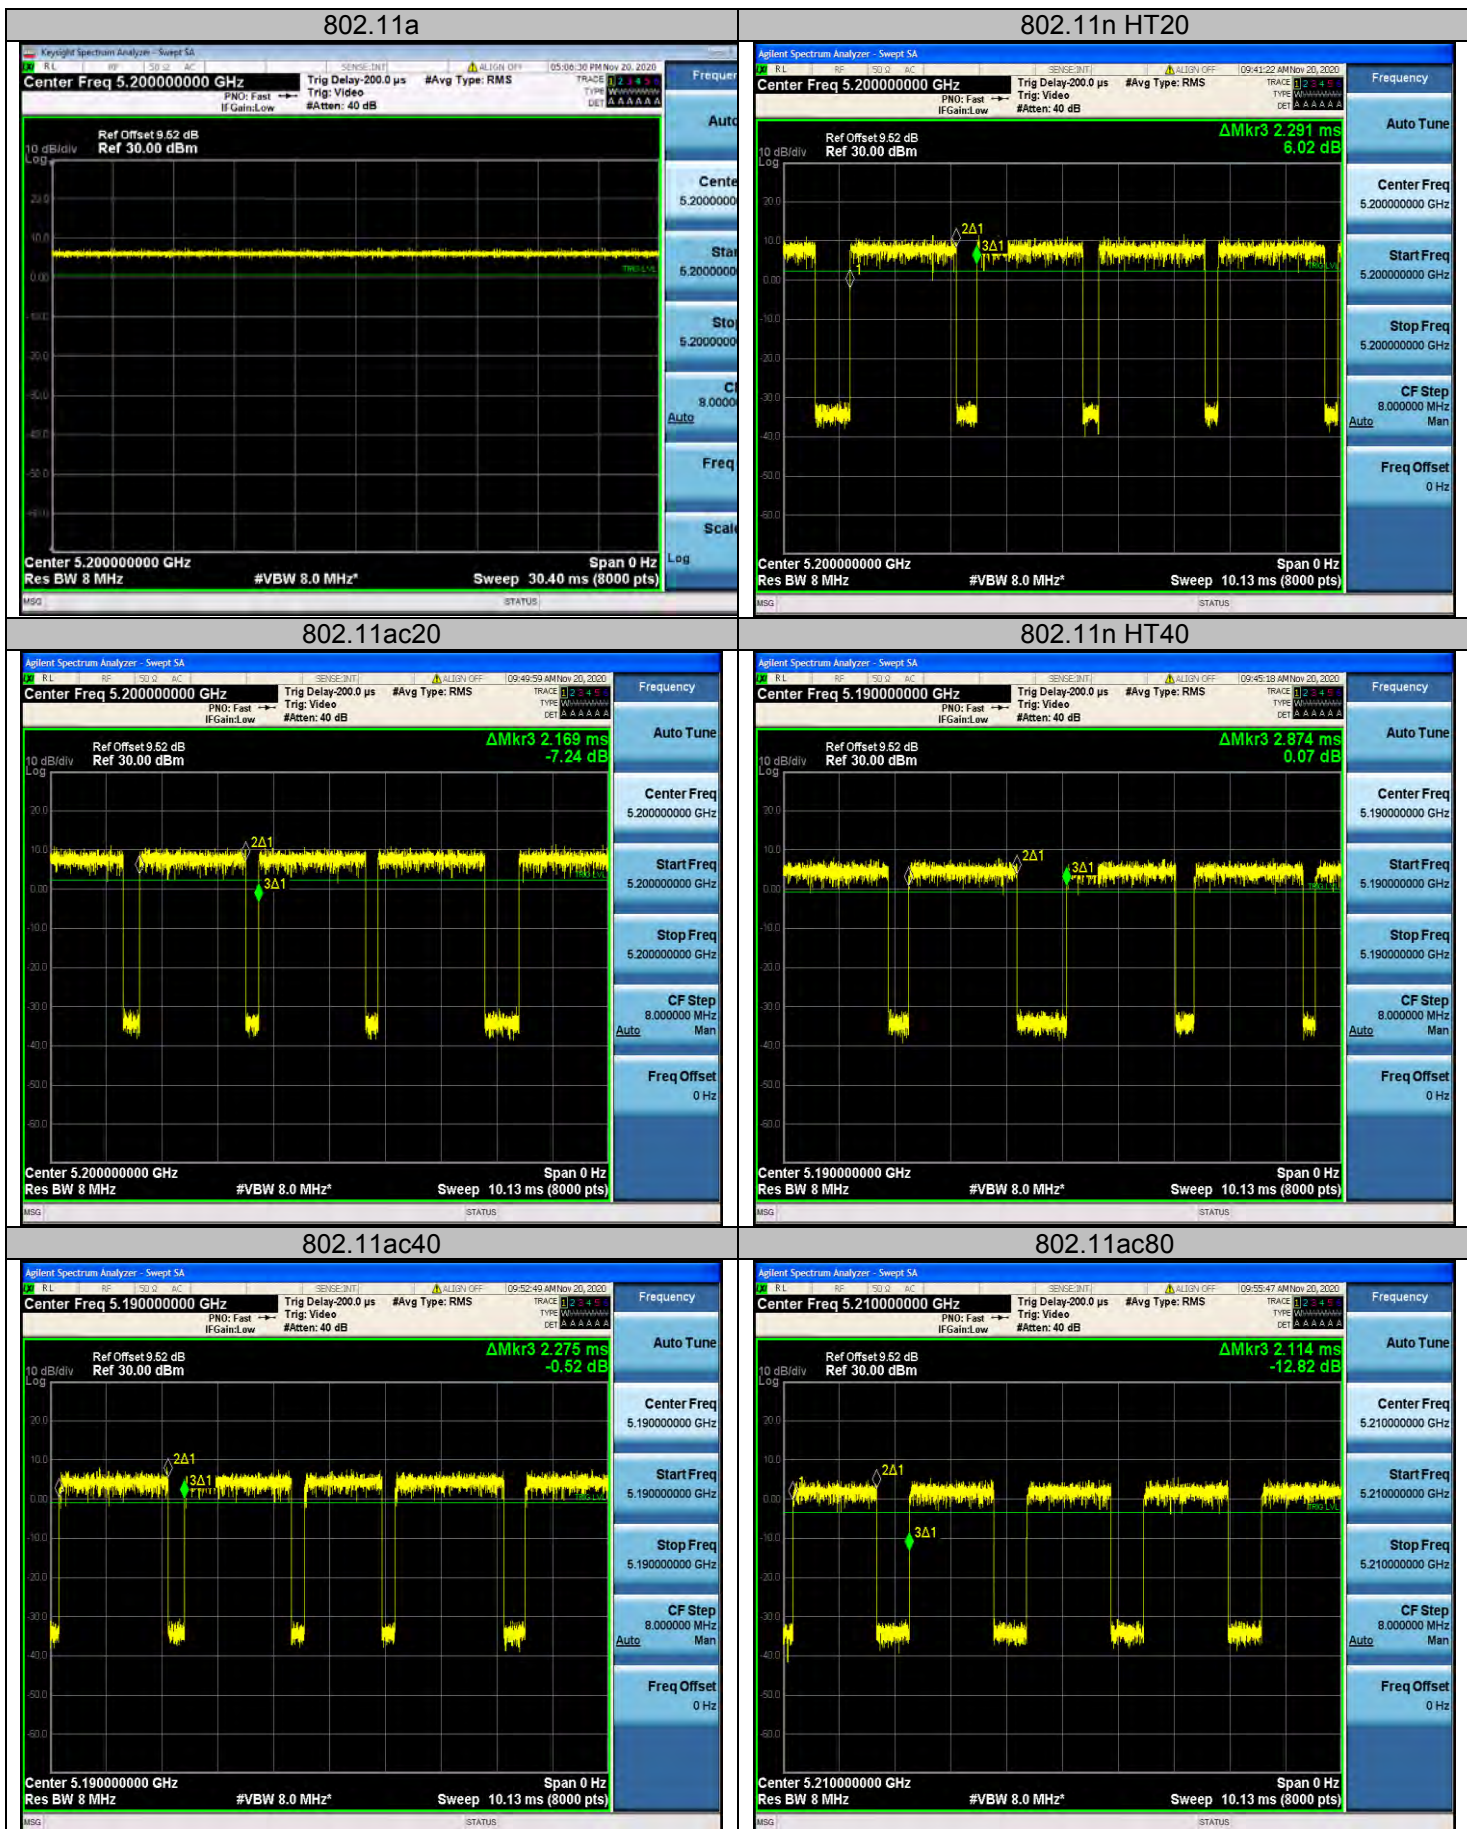

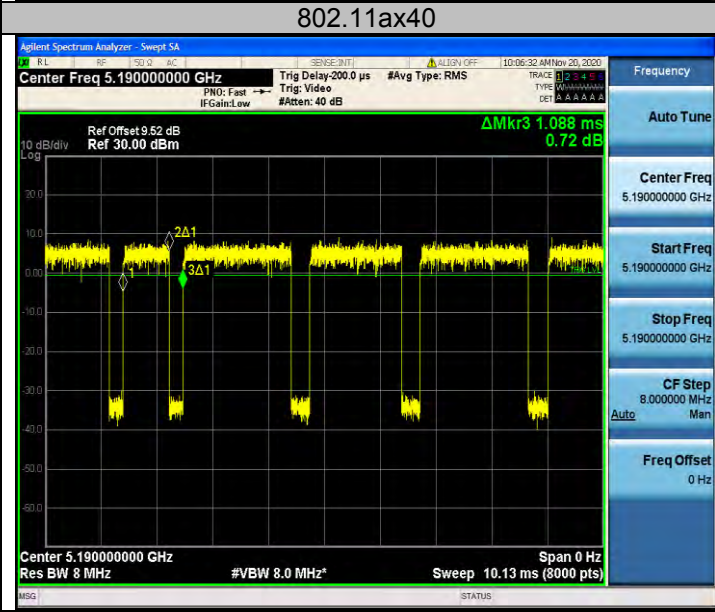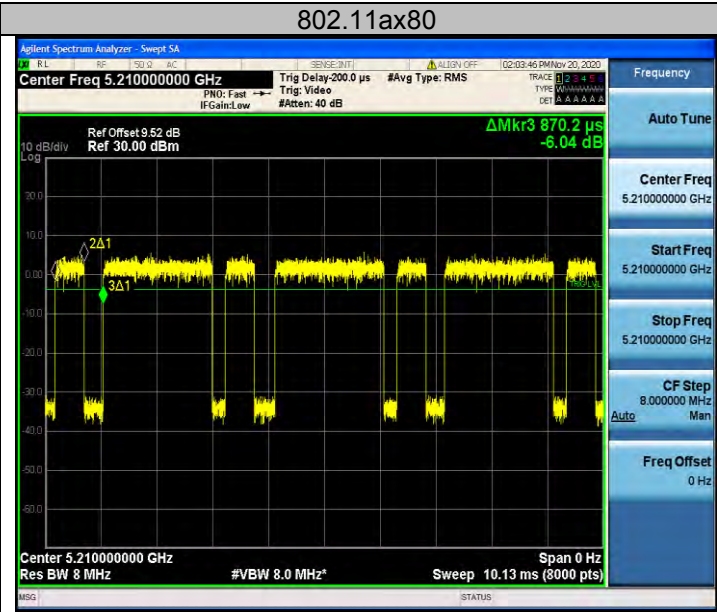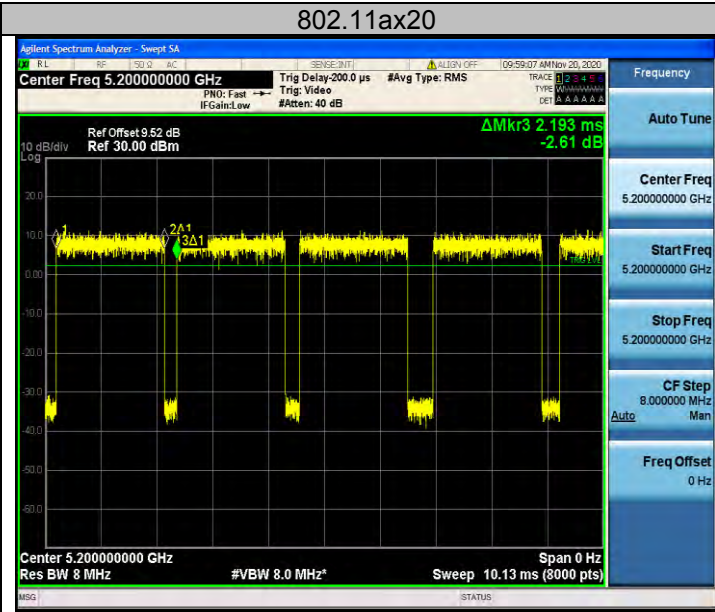



Antenna 1:
5725-5850MHz:

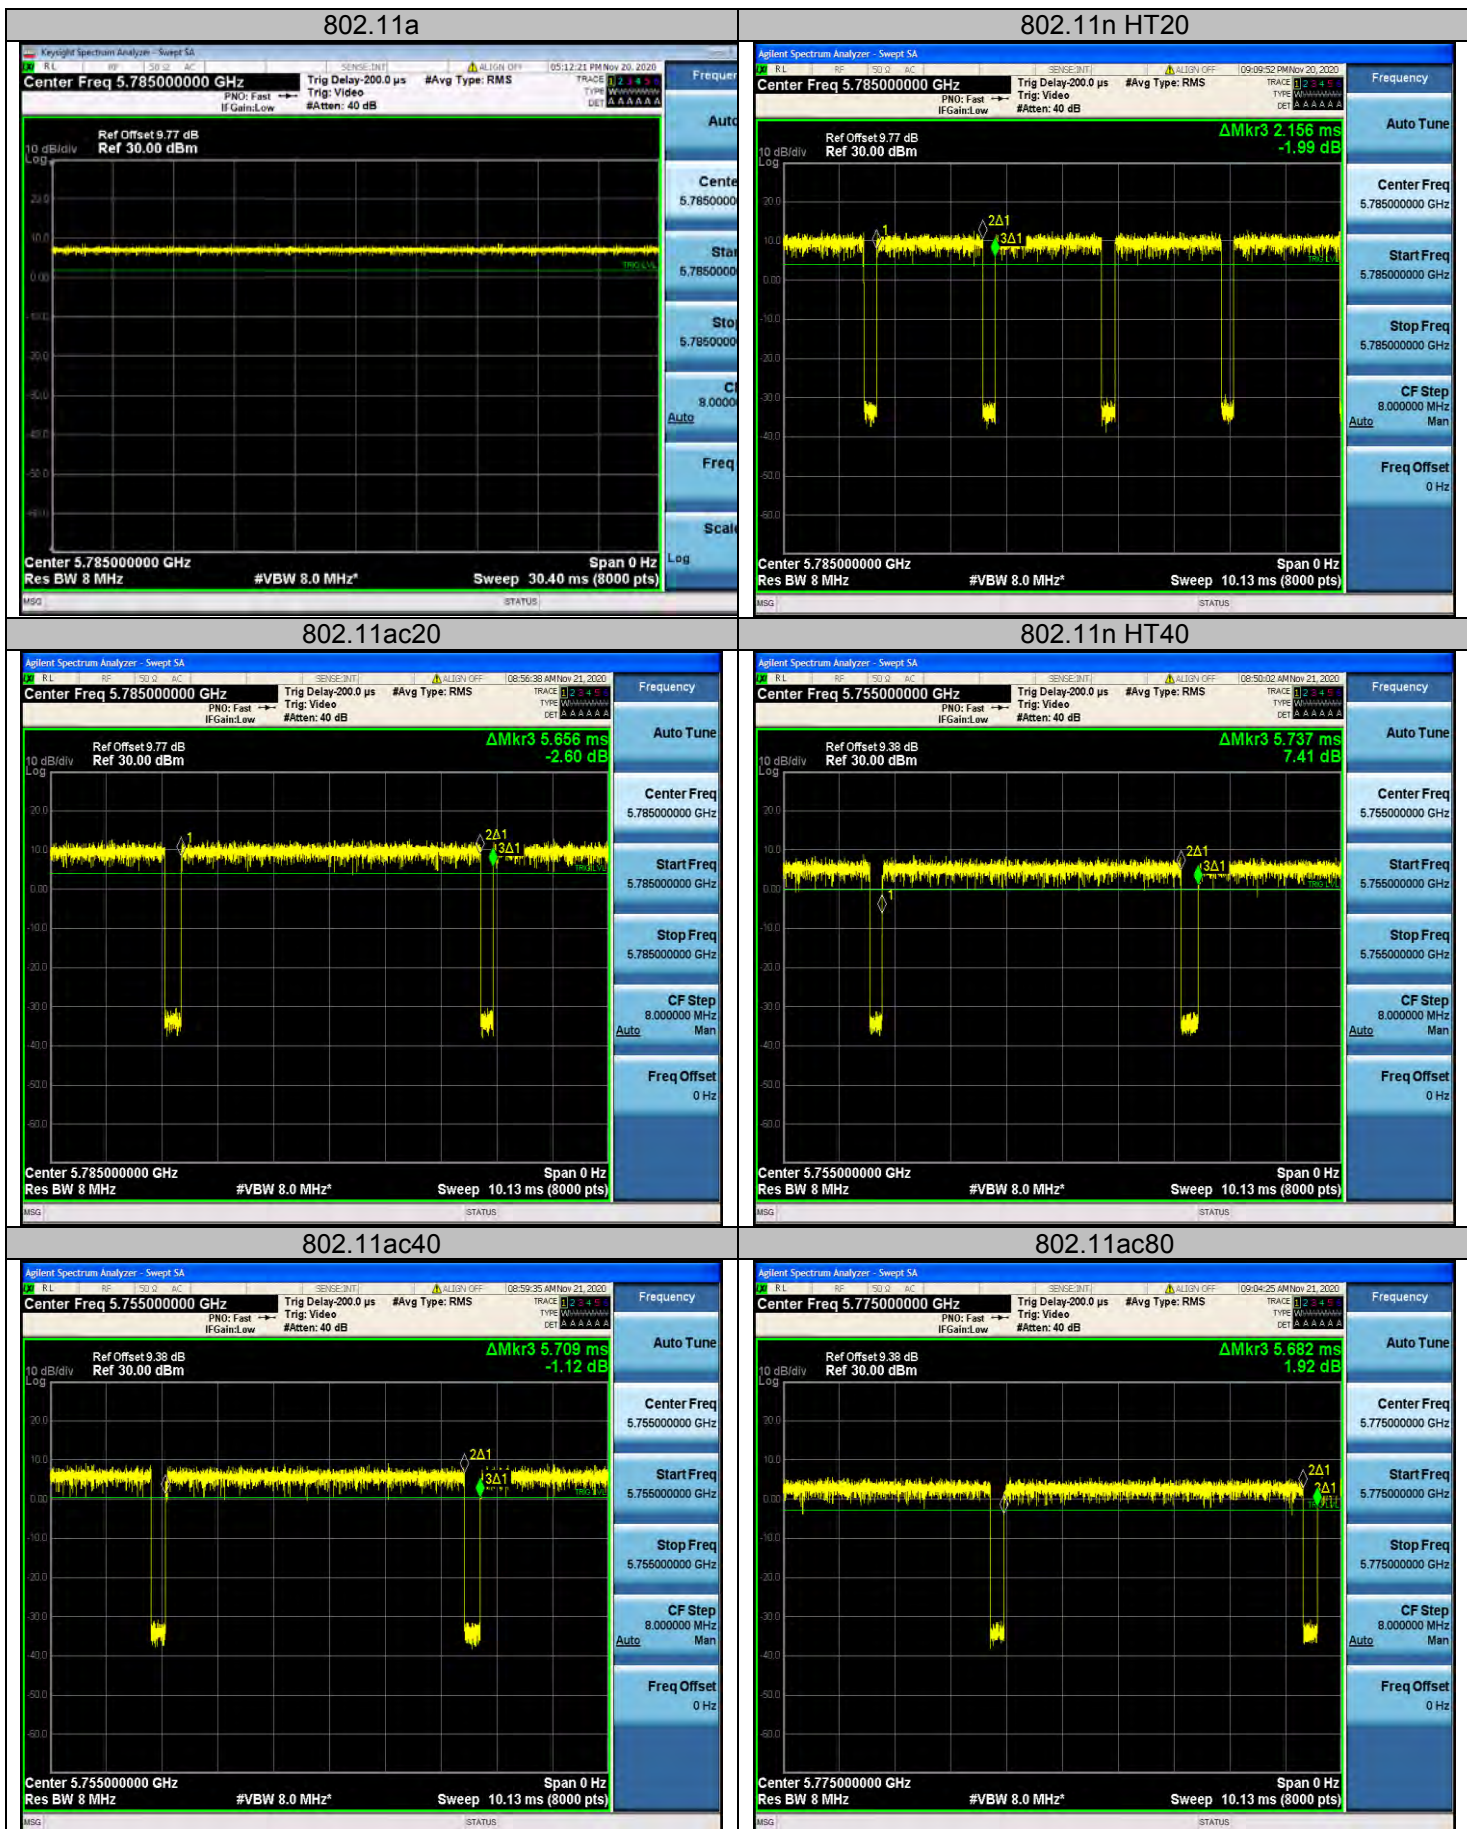

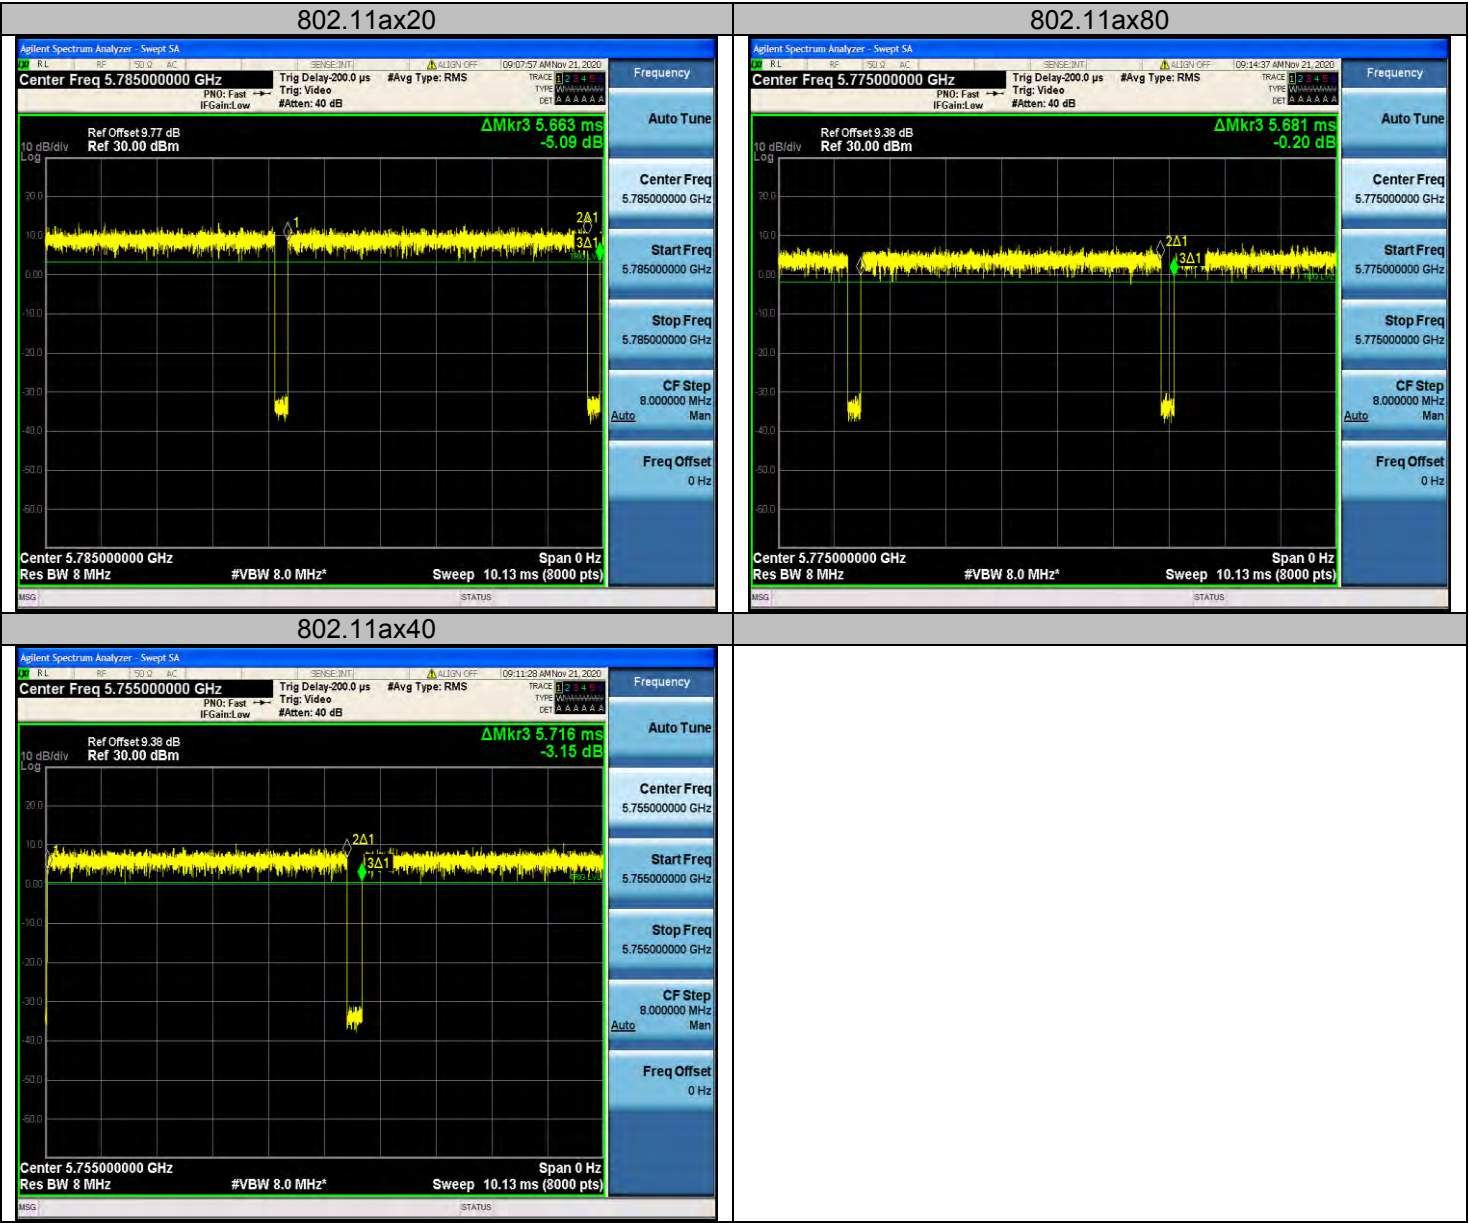



Antenna 6:
5150-5250MHz:

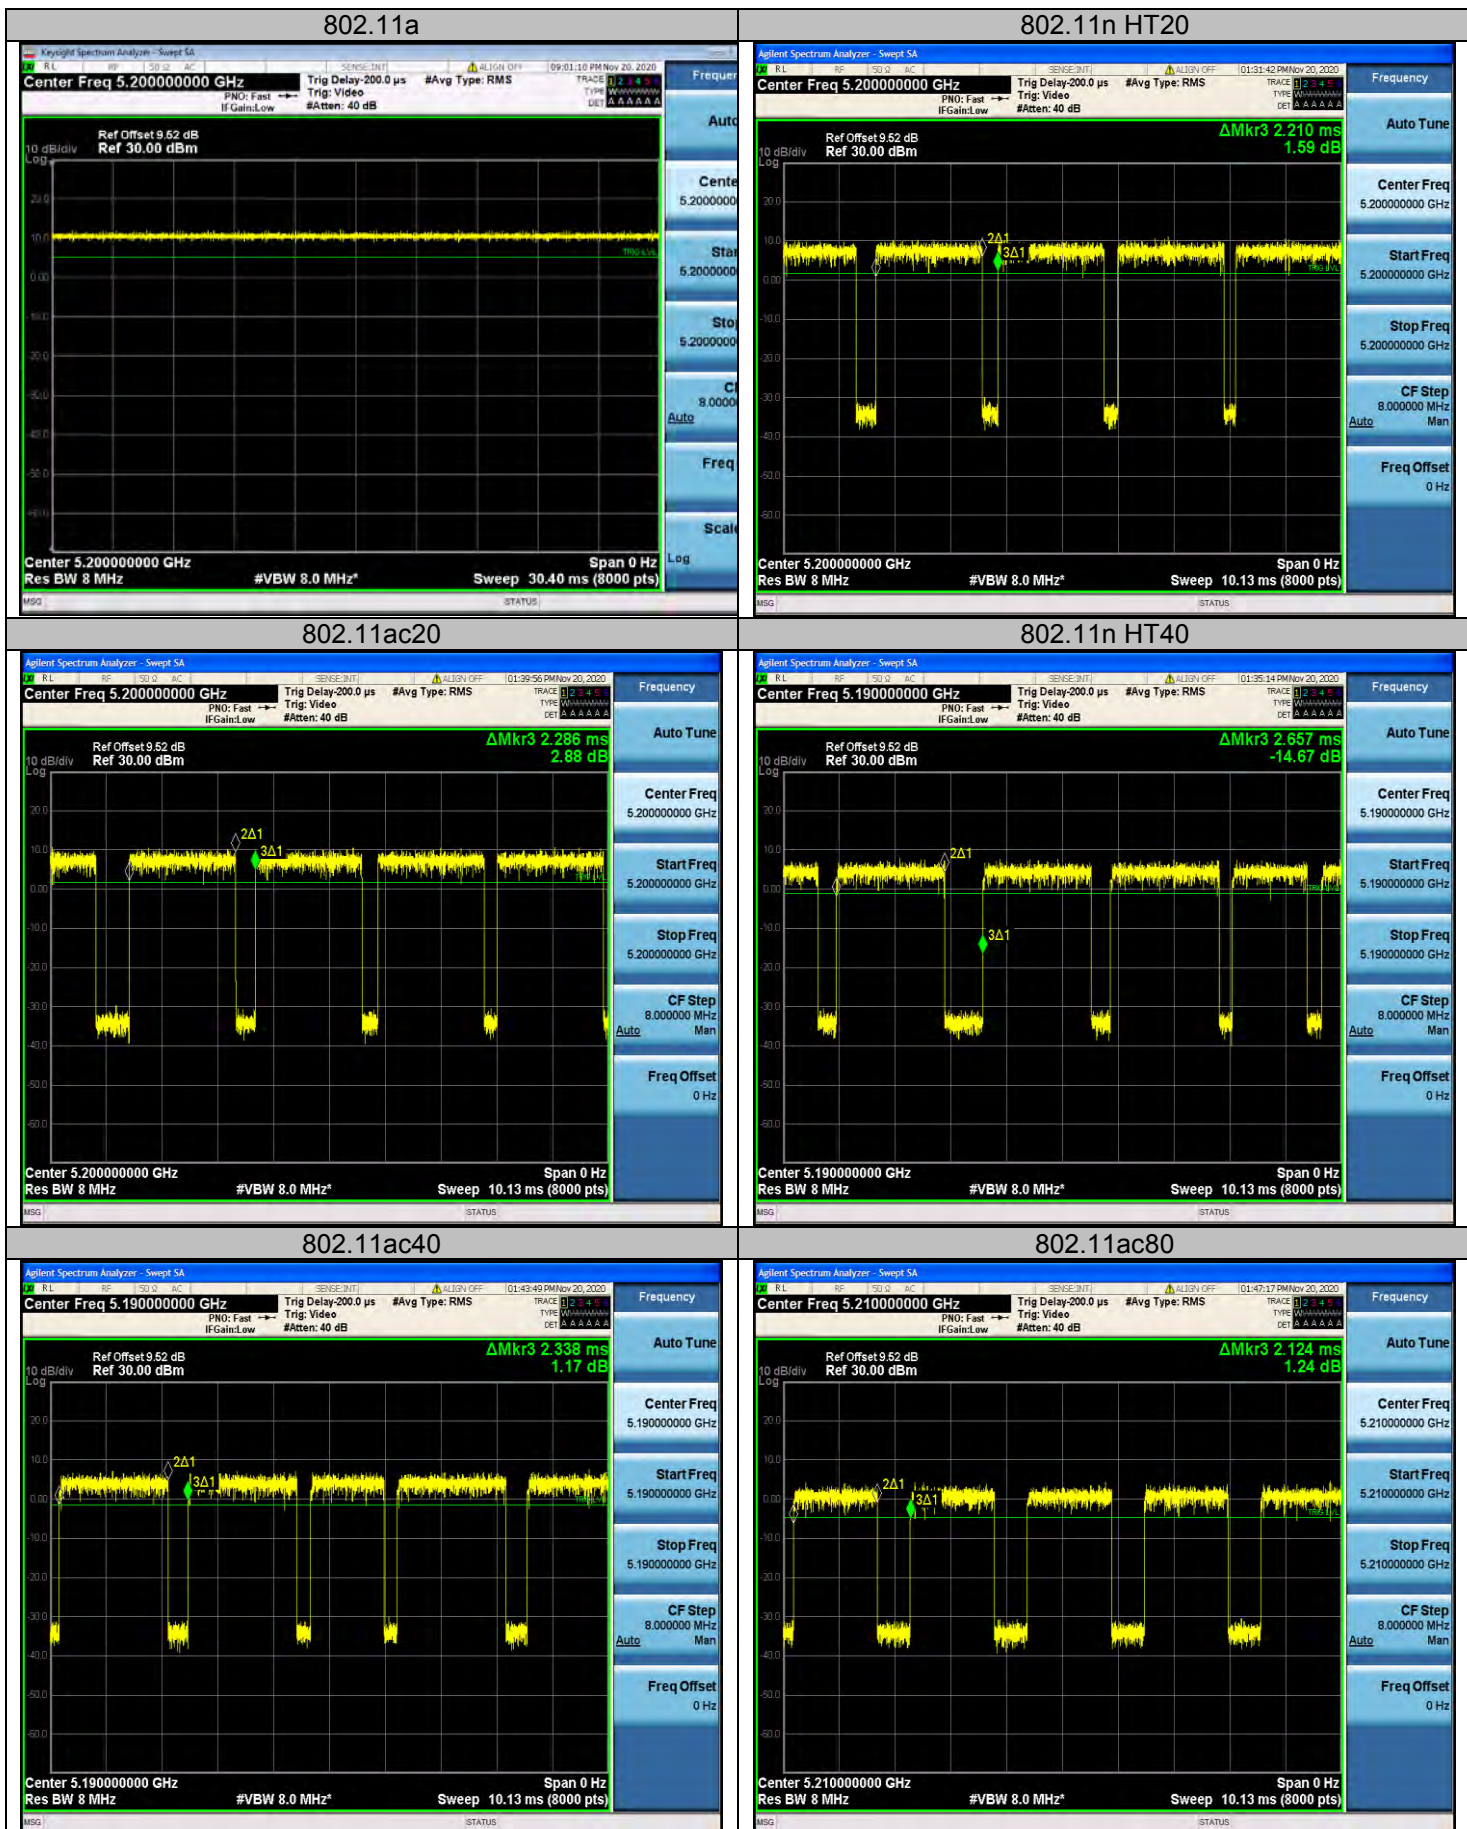




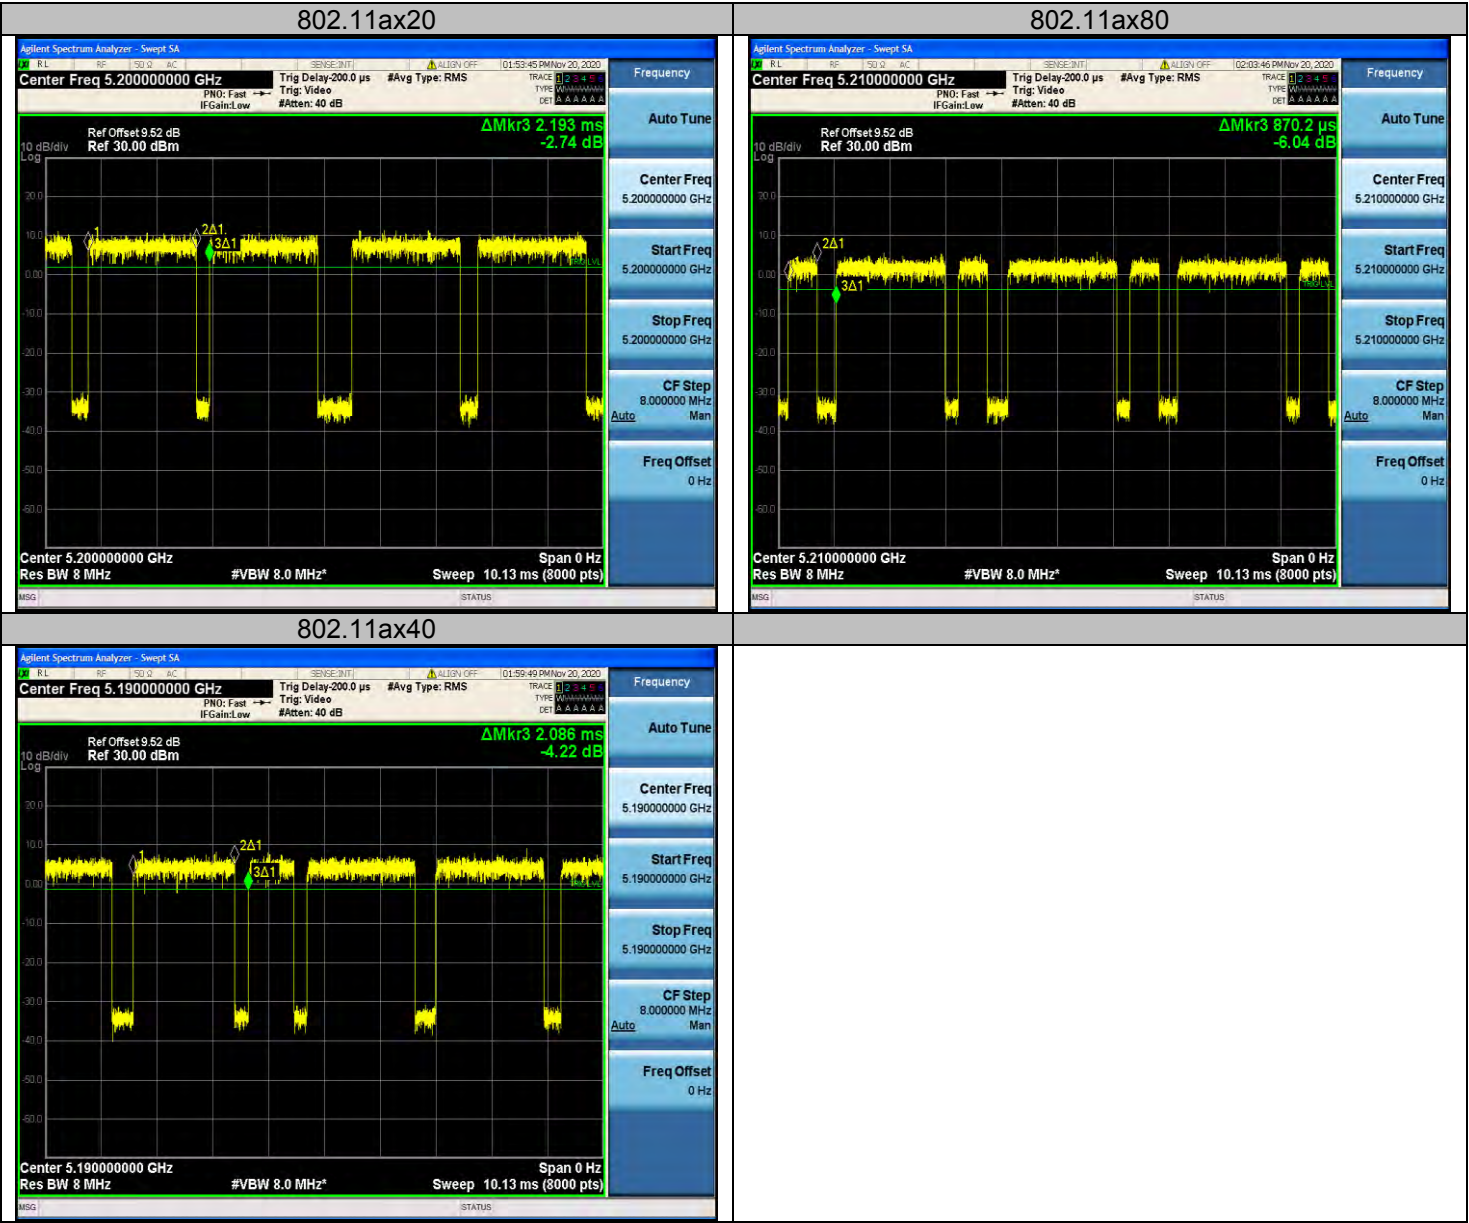


Antenna 2:
5725-5850MHz:

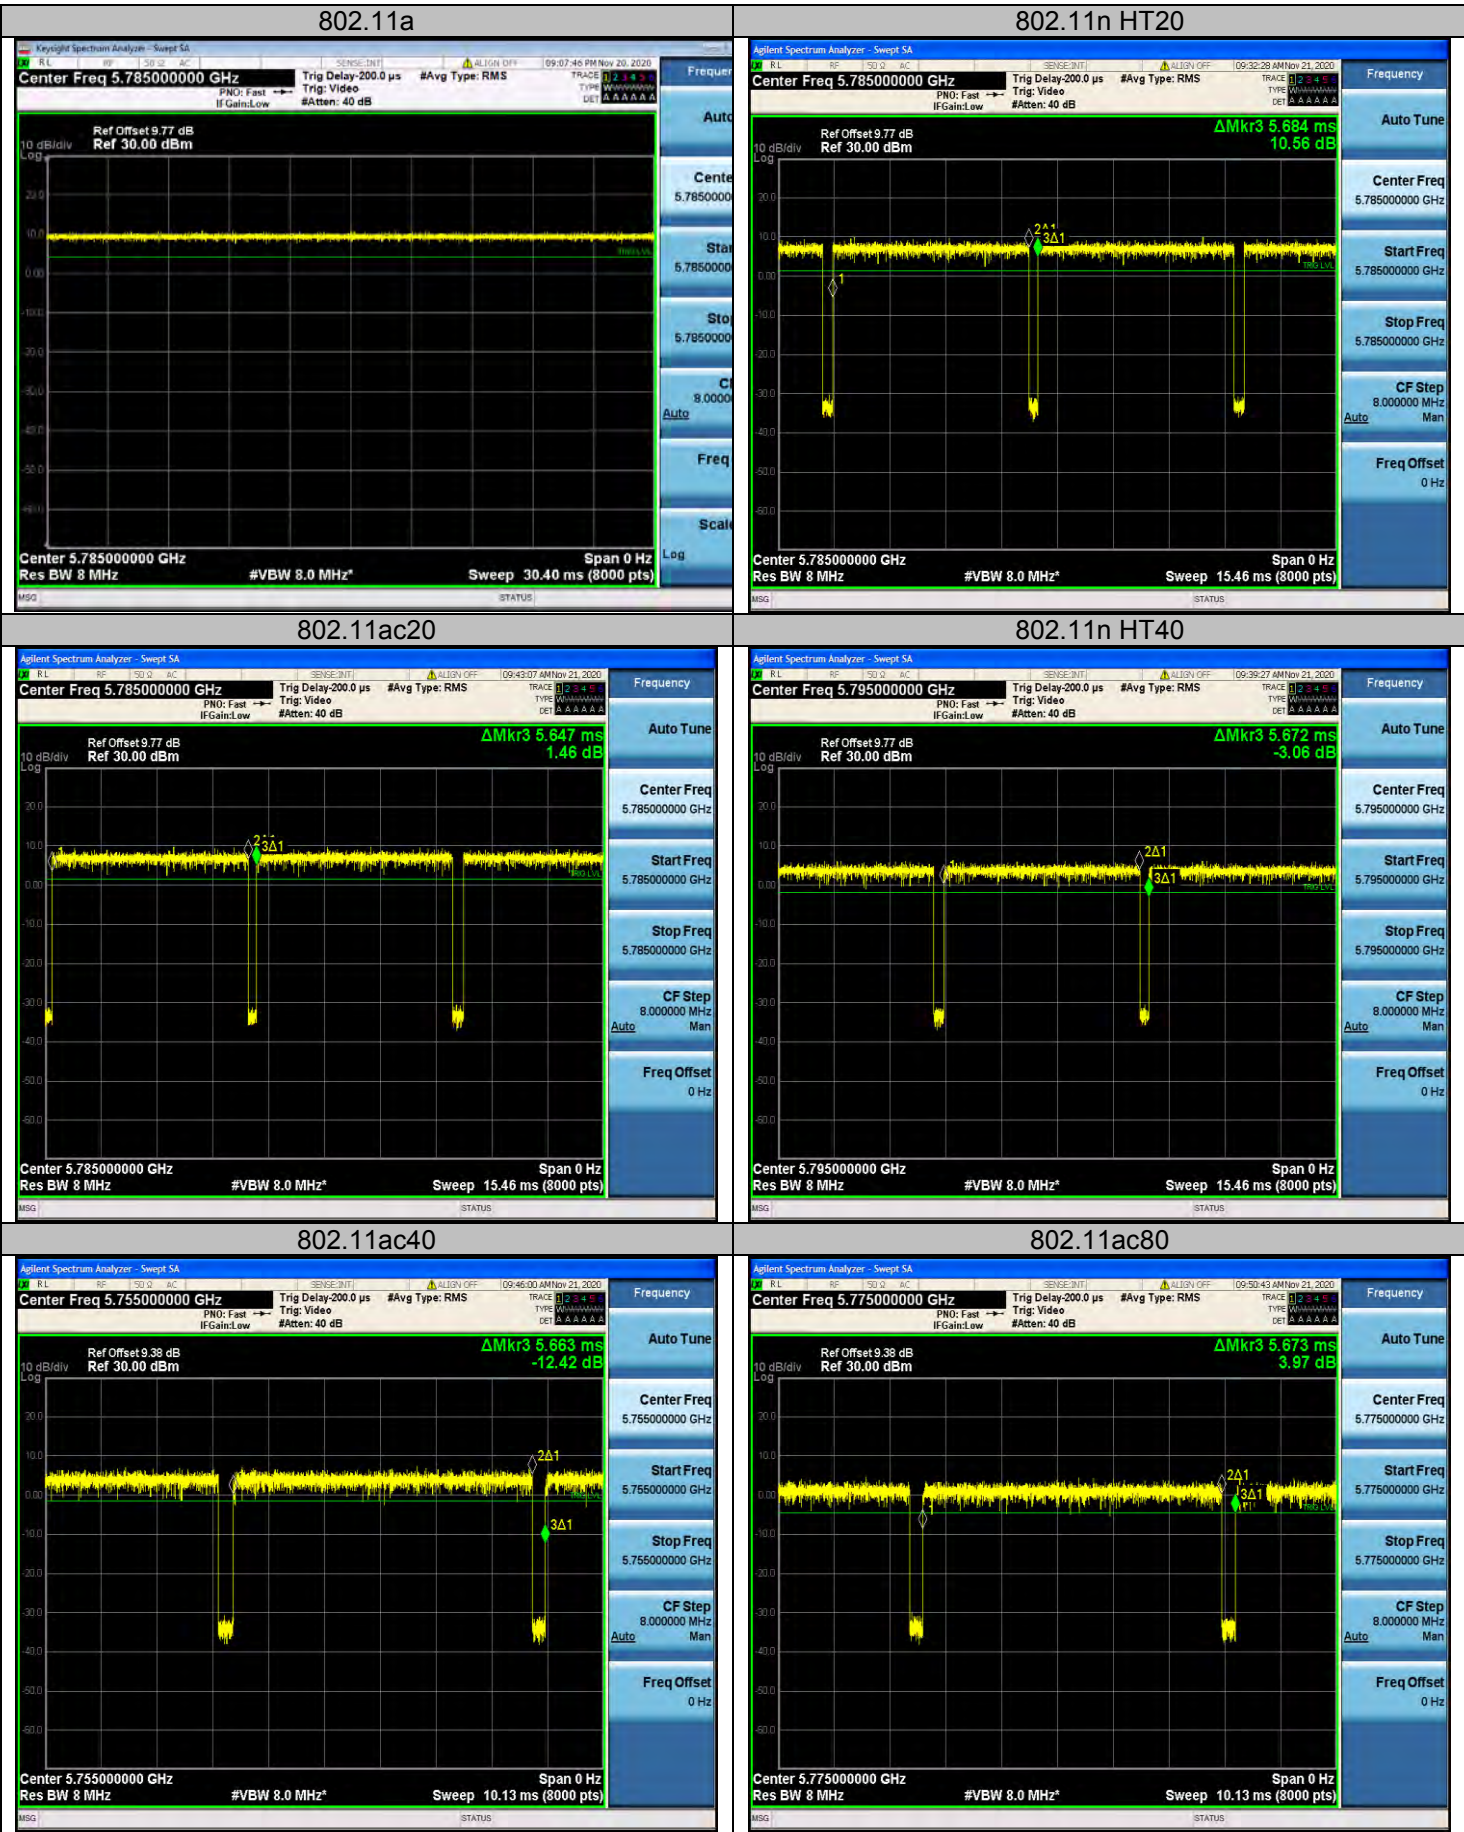


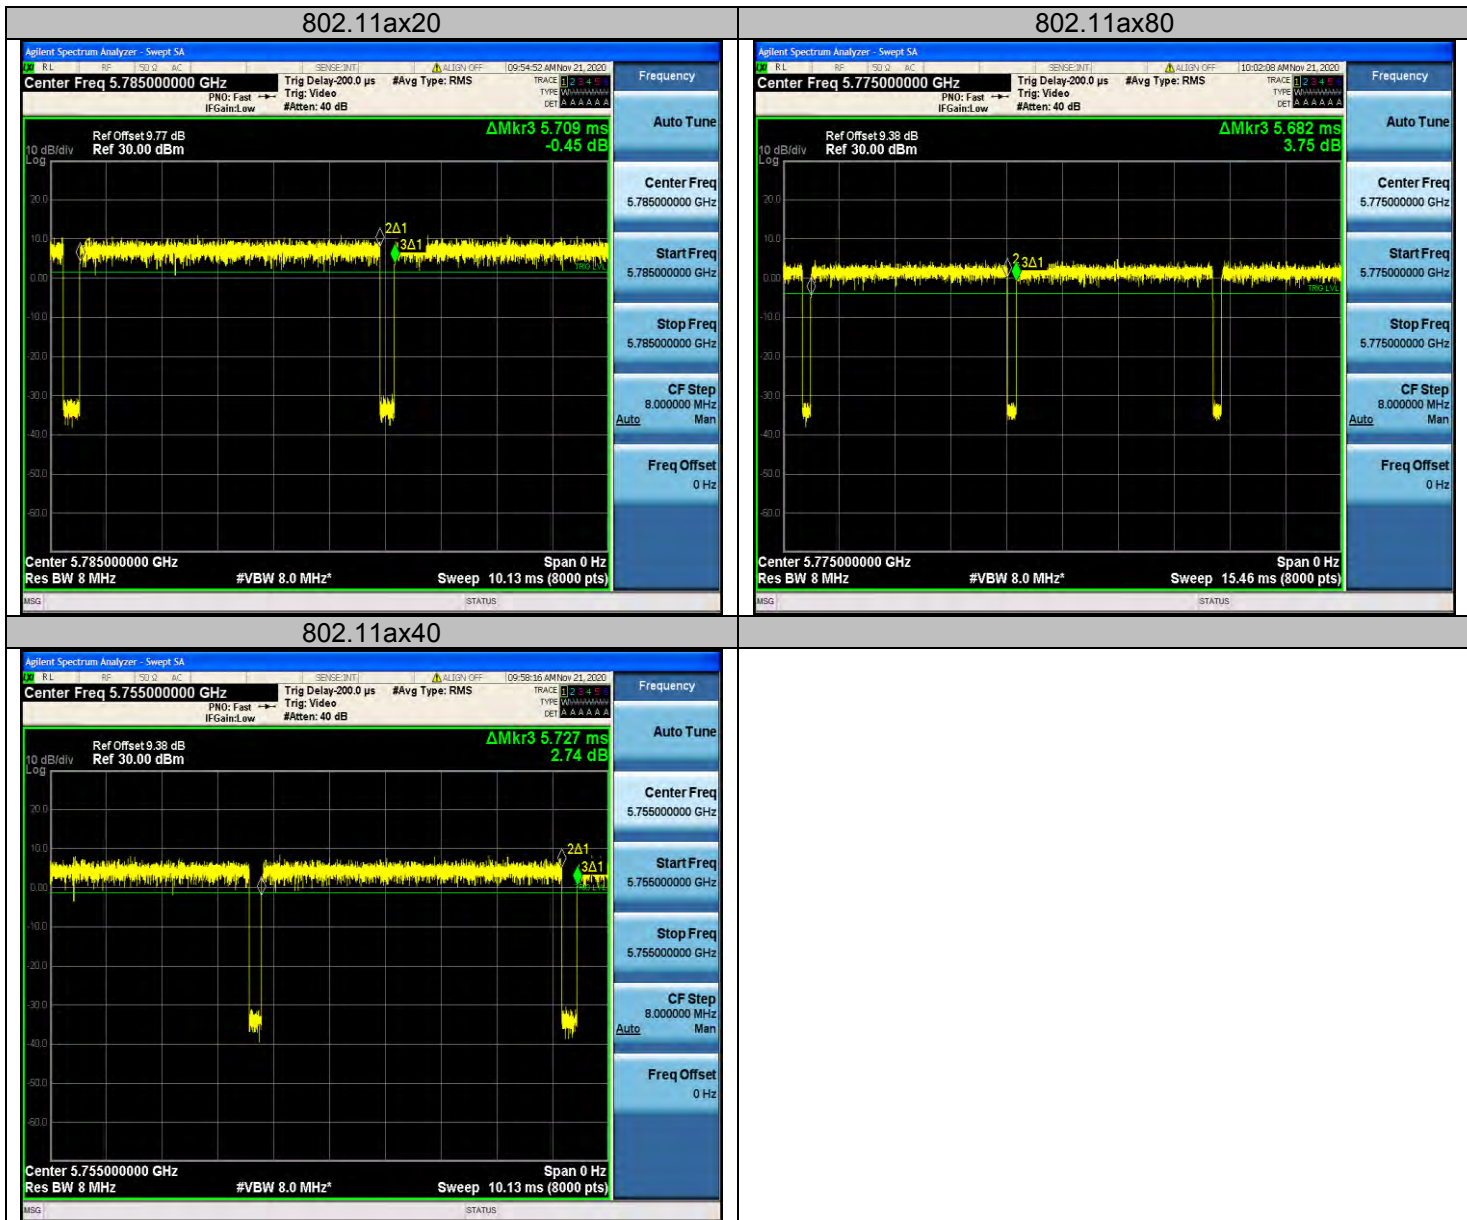


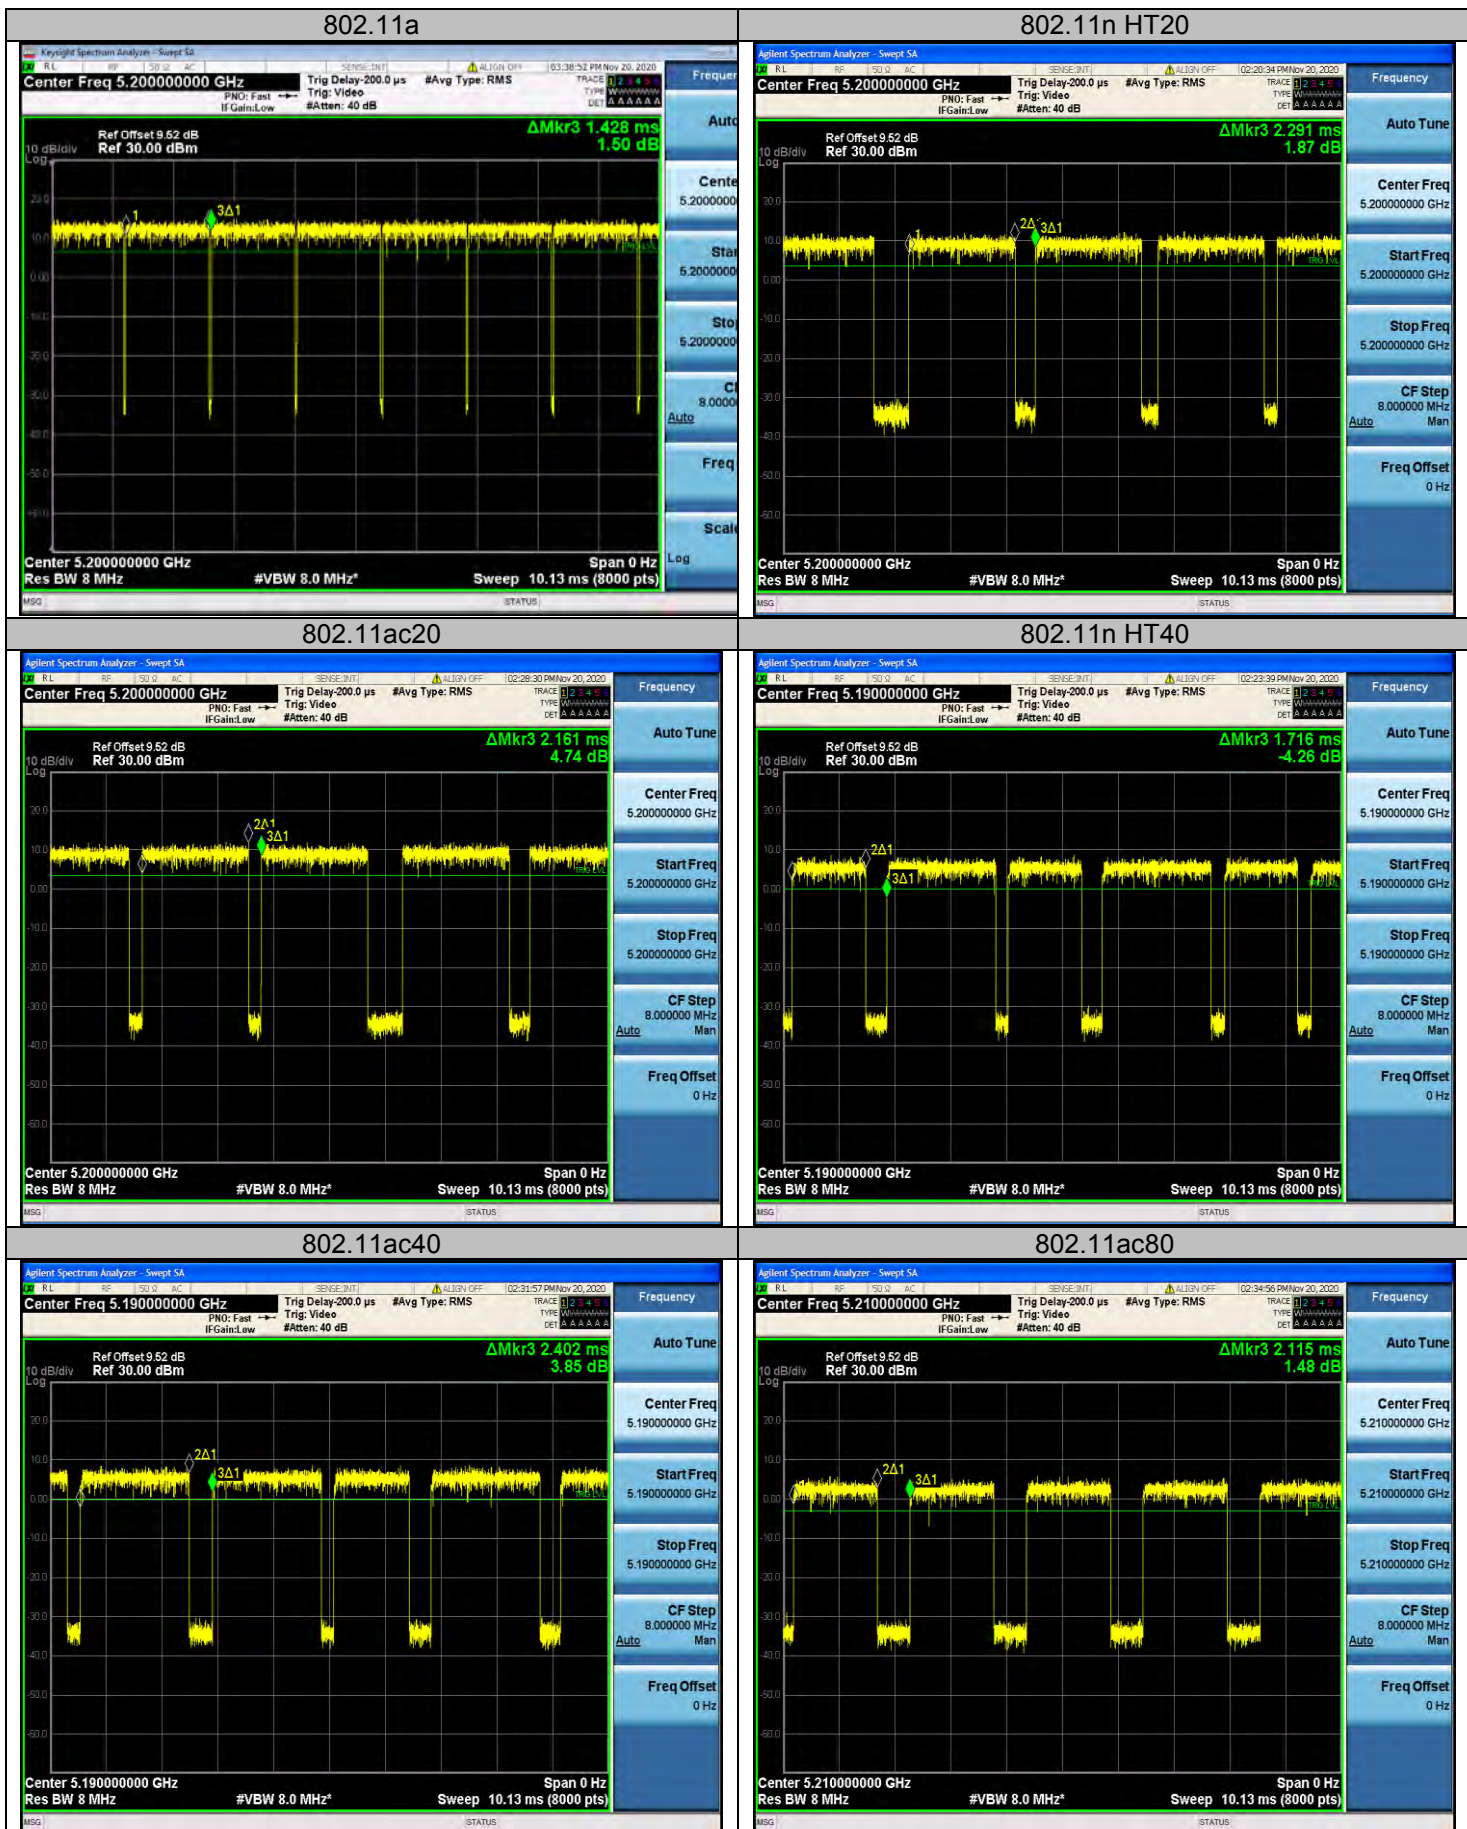Antenna 7:
5150-5250MHz:

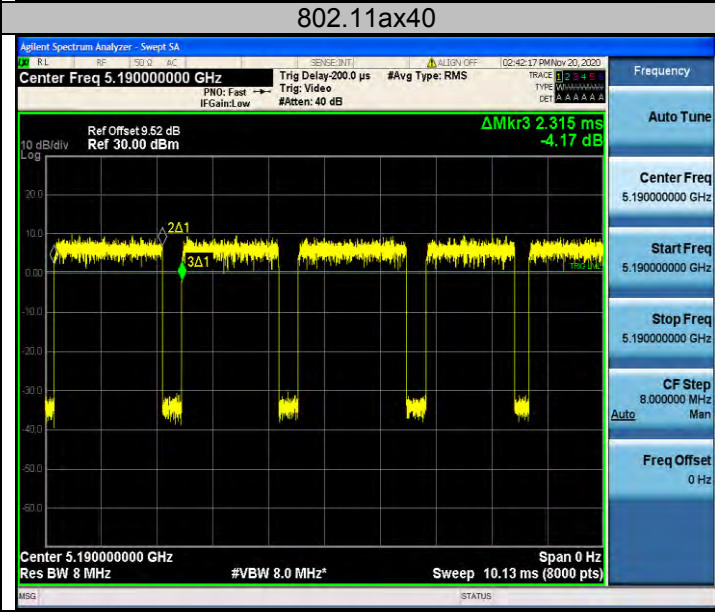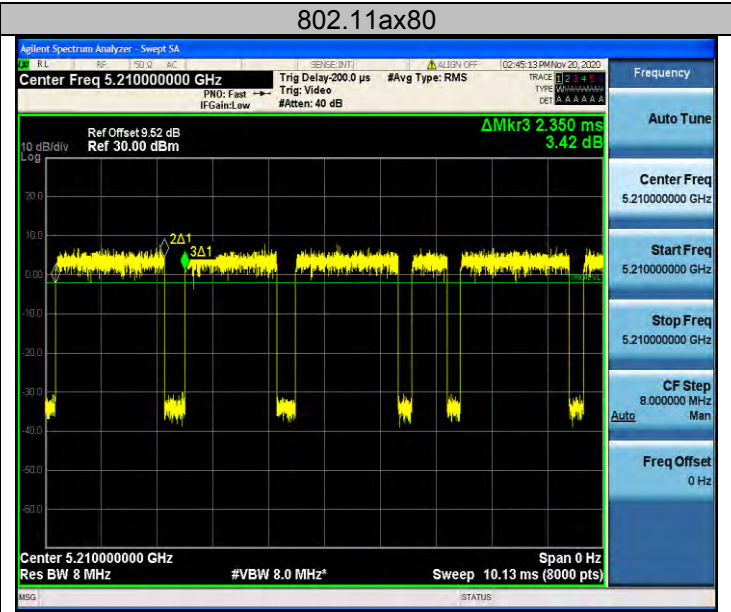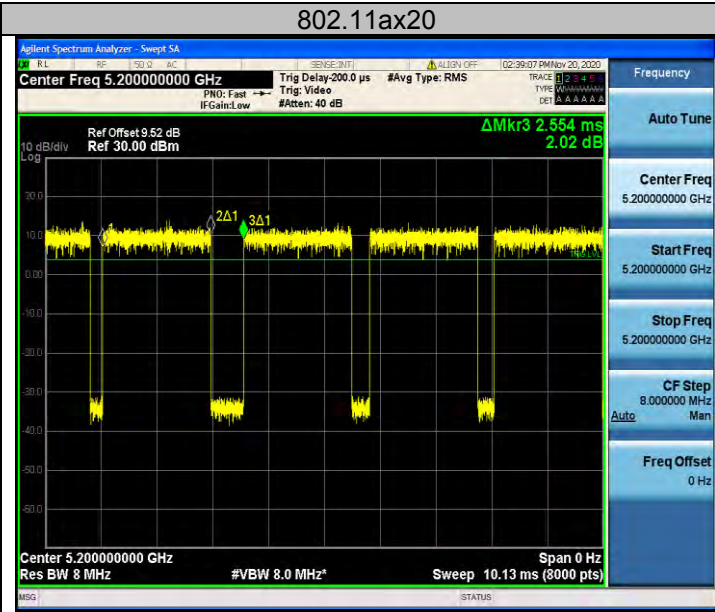



Antenna 3:
5725-5850MHz:

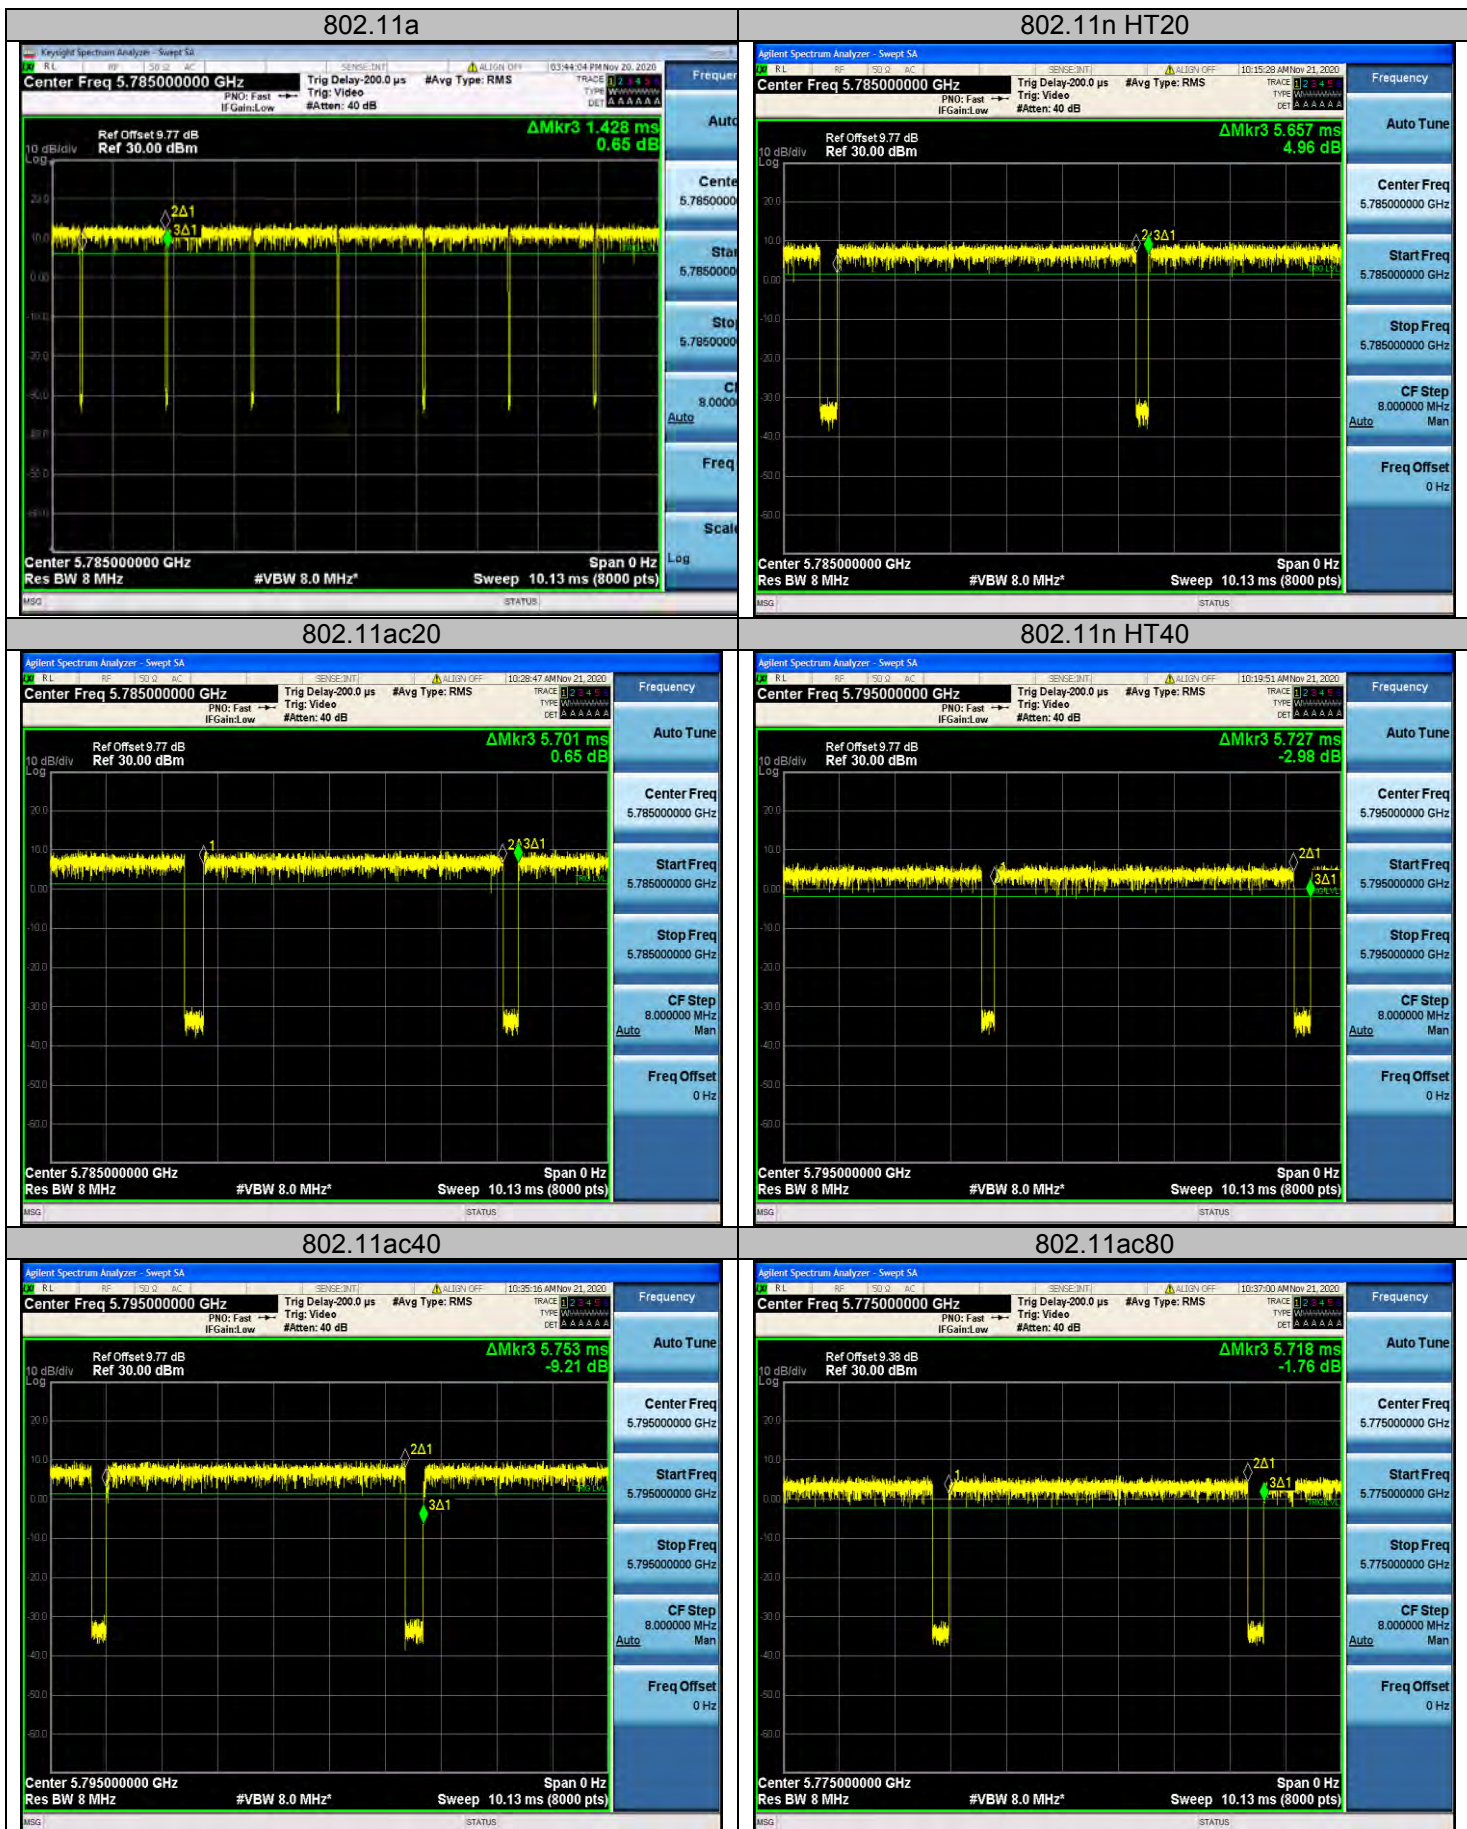

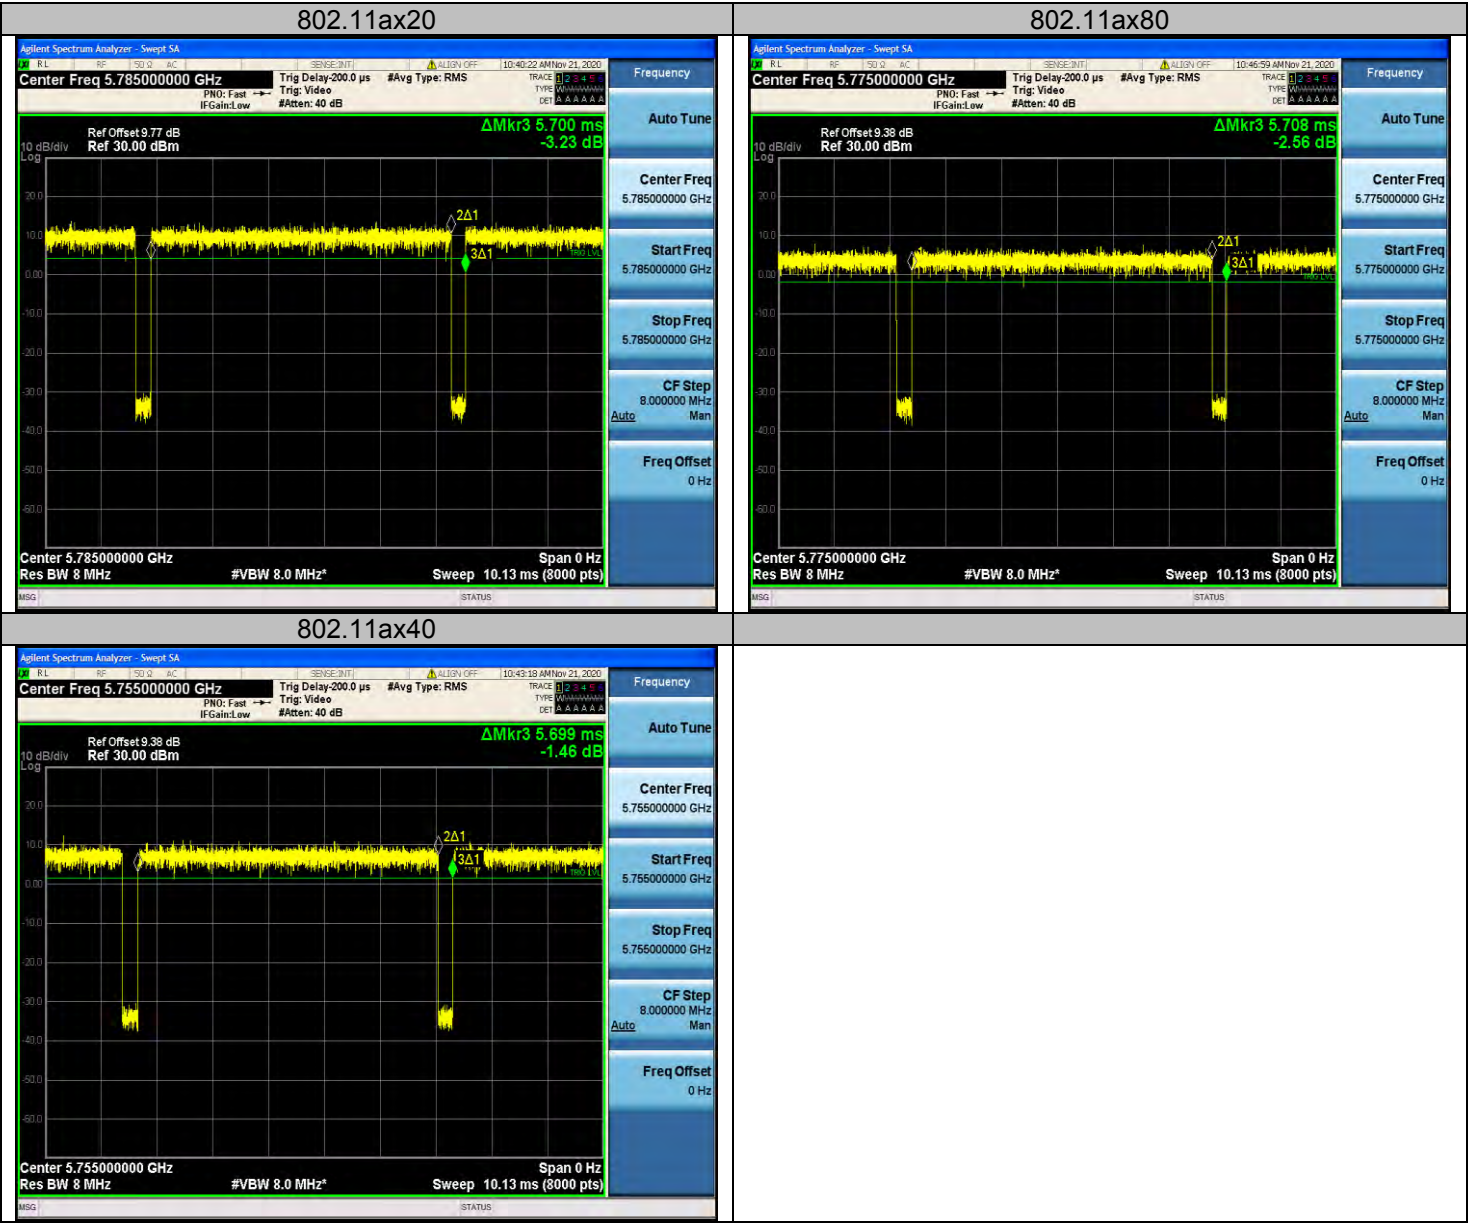

Antenna 8:
5150-5250MHz:

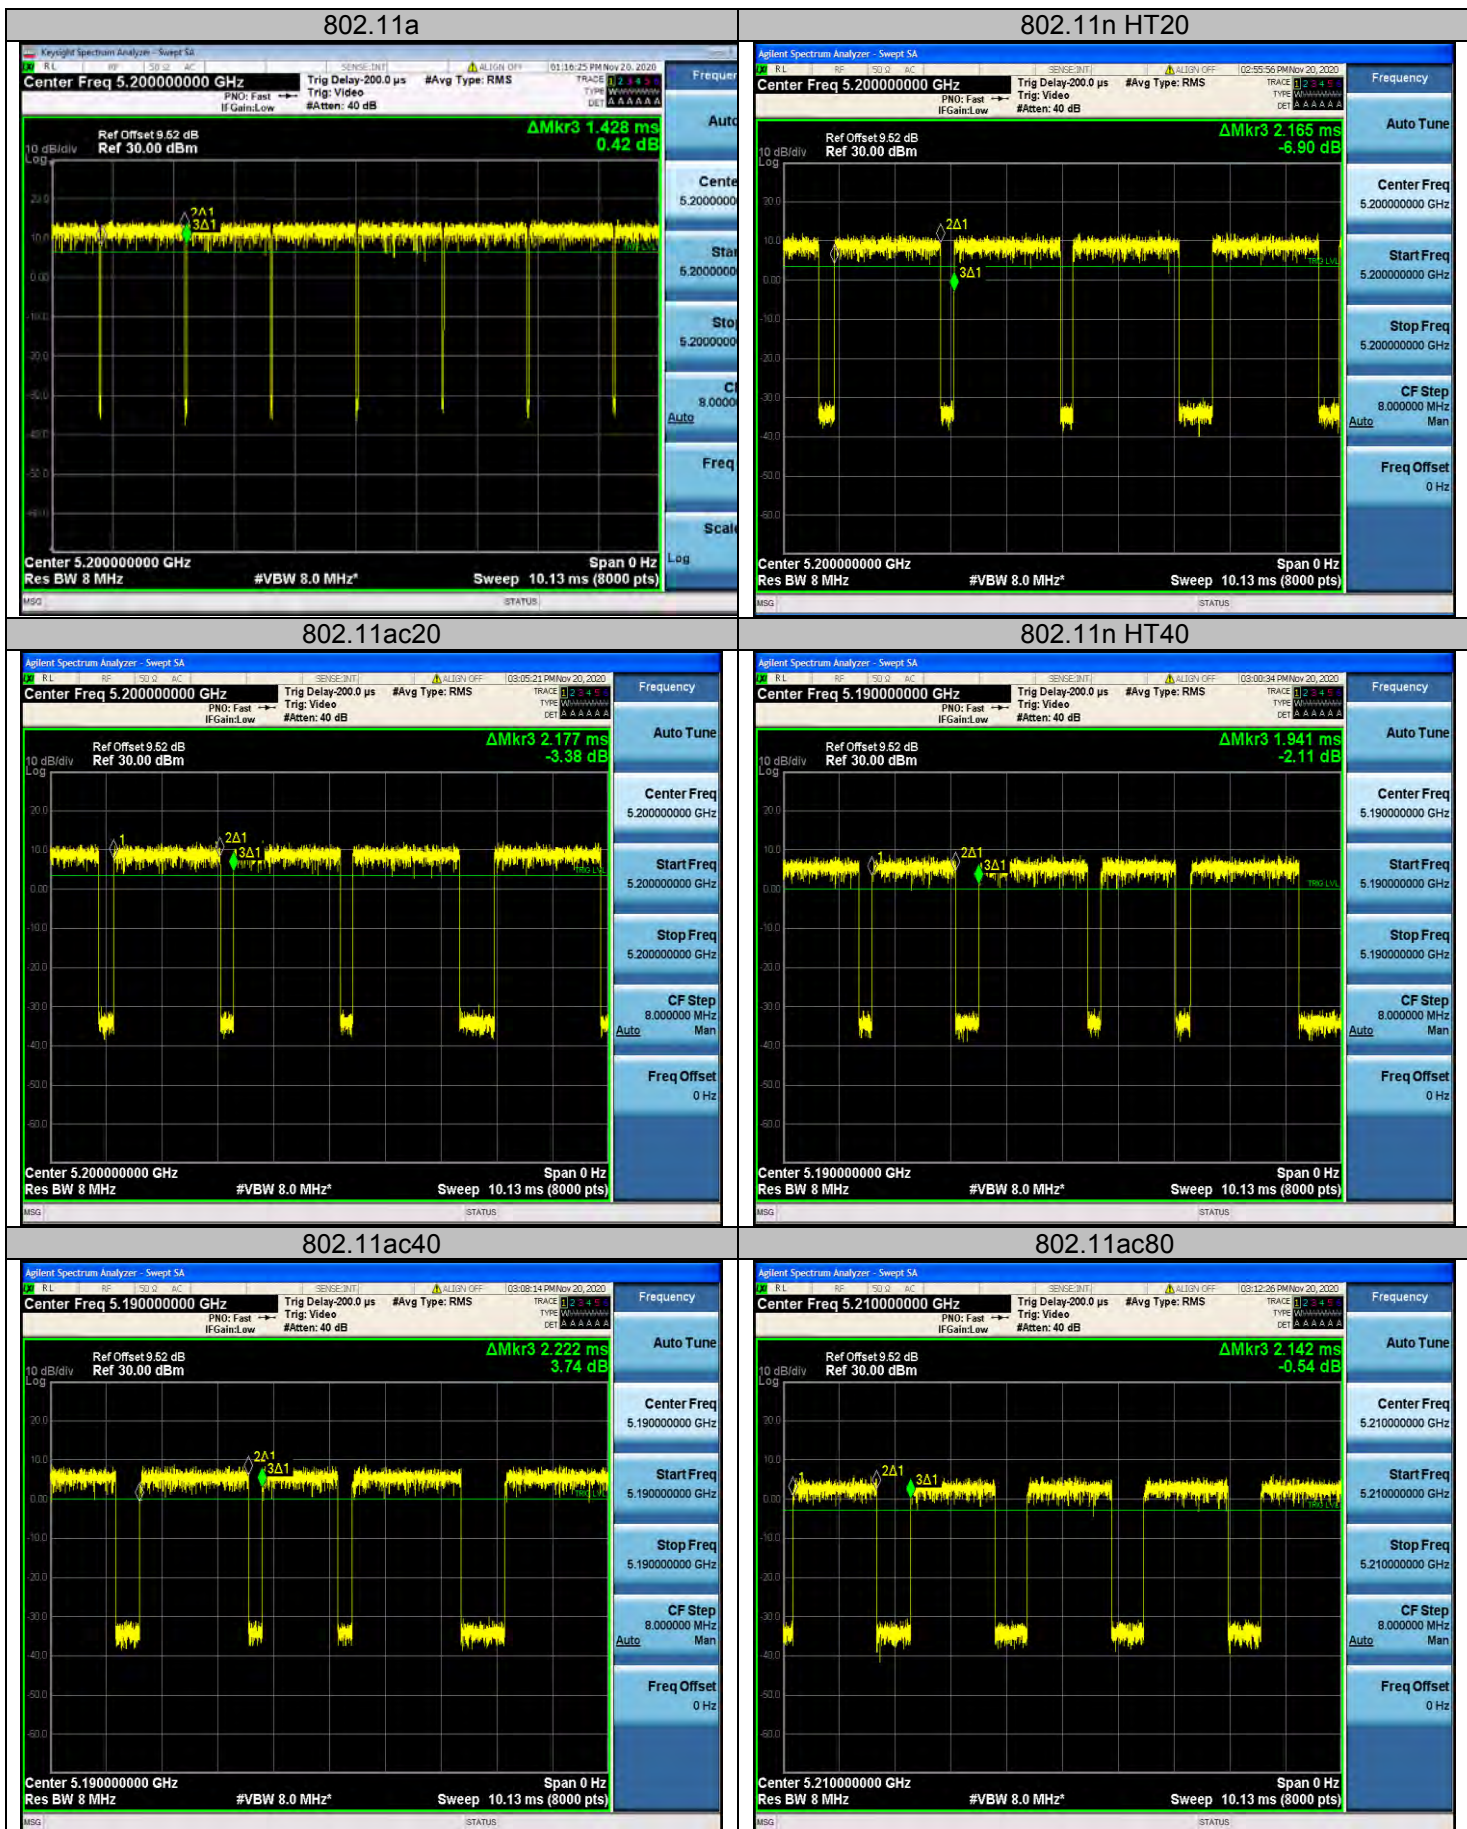

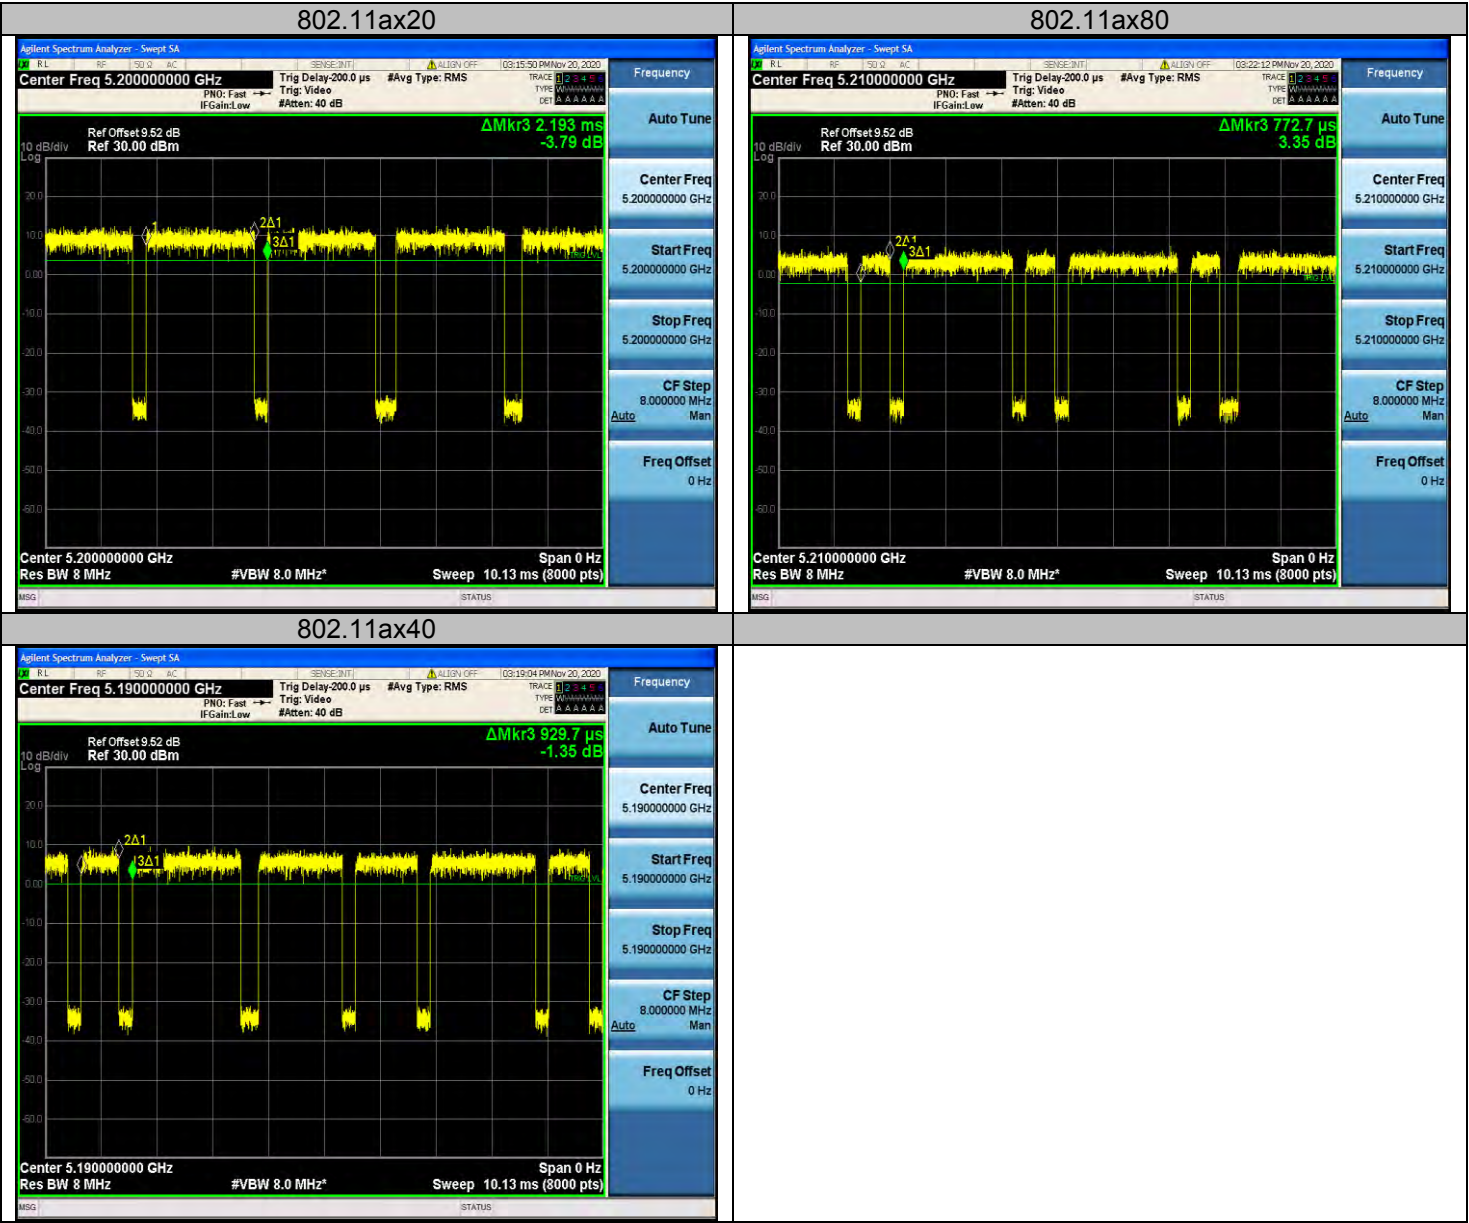

802.11a

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.785000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.77 dB

Ref 30.00 dBm

Δ Mkr3 1.428 ms

1.98 dB

Center 5.78500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.13 ms (8000 pts)

802.11n HT20

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.785000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.77 dB

Ref 30.00 dBm

Δ Mkr3 5.701 ms

2.35 dB

Center 5.78500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 15.46 ms (8000 pts)

802.11ac20

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.785000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.77 dB

Ref 30.00 dBm

Δ Mkr3 5.691 ms

-9.61 dB

Center 5.78500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.13 ms (8000 pts)

802.11n HT40

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.755000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.38 dB

Ref 30.00 dBm

Δ Mkr3 5.709 ms

-11.44 dB

Center 5.75500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.13 ms (8000 pts)

802.11ac40

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.755000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.38 dB

Ref 30.00 dBm

Δ Mkr3 5.719 ms

2.36 dB

Center 5.75500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 15.46 ms (8000 pts)

802.11ac80

Agilent Spectrum Analyzer - Sweep SA

Center Freq 5.775000000 GHz

Trig Delay: 200.0 μ s

#Avg Type: RMS

Ref Offset: 9.38 dB

Ref 30.00 dBm

Δ Mkr3 5.709 ms




-1.45 dB

Center 5.77500000 GHz

Res BW 8 MHz


#VBW 8.0 MHz

Sweep 10.13 ms (8000 pts)

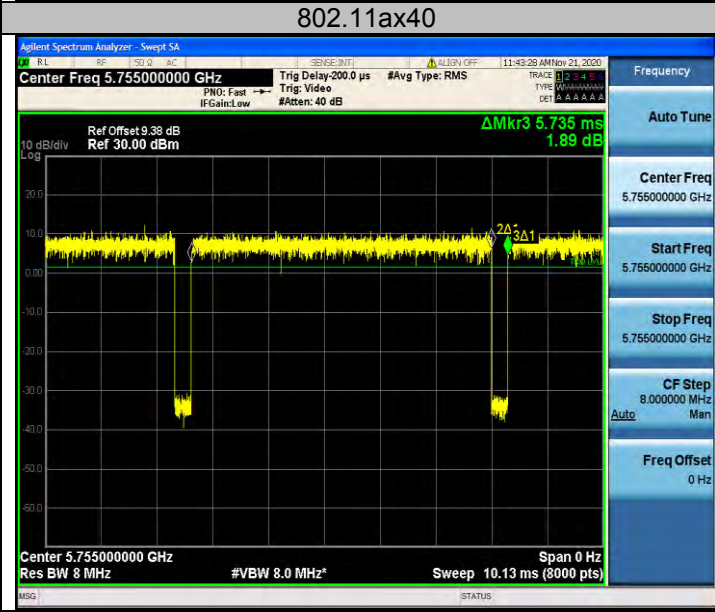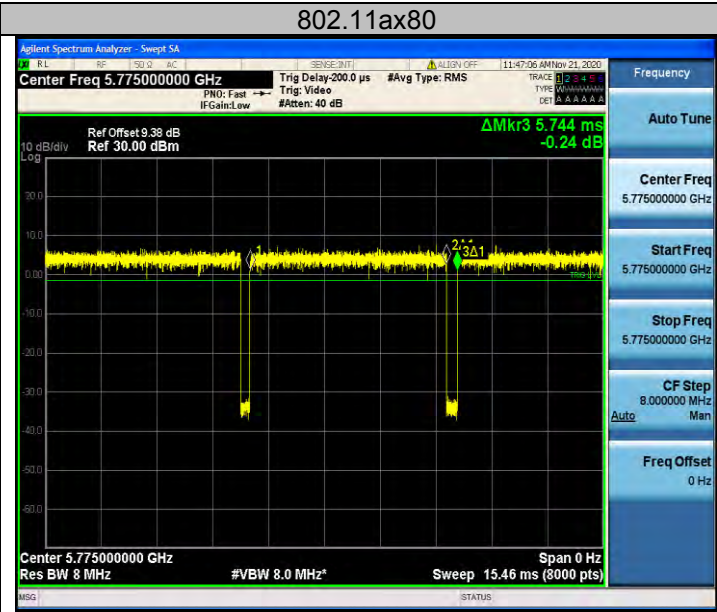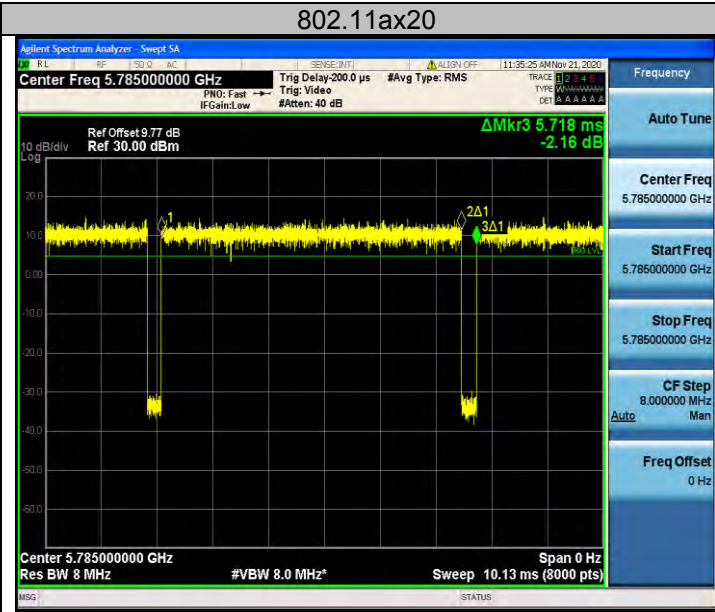

4.4. Maximum Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 Section E3 Measurement using a Power Meter (PM):

- a. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 1. The EUT is configured to transmit continuously or to transmit with a constant duty cycle
 2. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B
- c. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Fixed: 1 Watt (30dBm) Mobile and portable: 250mW (24dBm)
5250-5350	250mW (24dBm)
5470-5725	250mW (24dBm)
5725-5850	1 Watt (30dBm)

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)

TEST RESULTS

Temperature	23.6°C	Humidity	55.7%
Test Engineer	Moon Tan	Configurations	IEEE 802.11a/n/ac

Antenna 5:
5150-5250MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
36	5180	14.78	0	14.78	24.00	PASS
40	5200	14.38	0	14.38	24.00	PASS
48	5240	14.86	0	14.86	24.00	PASS
802.11n20						
36	5180	12.92	0.76	13.68	24.00	PASS
40	5200	12.70	0.76	13.46	24.00	PASS
48	5240	12.95	0.76	13.71	24.00	PASS
802.11ac20						
36	5180	12.82	0.51	13.33	24.00	PASS
40	5200	13.12	0.51	13.63	24.00	PASS
48	5240	12.73	0.51	13.24	24.00	PASS
802.11n40						
38	5190	11.75	1.61	13.36	24.00	PASS
46	5230	12.25	1.61	13.86	24.00	PASS
802.11ac40						
38	5190	12.98	0.60	13.58	24.00	PASS
46	5230	12.63	0.60	13.23	24.00	PASS
802.11ac80						
42	5210	11.81	1.43	13.24	24.00	PASS
802.11ax20						
36	5180	13.45	0.51	13.96	24.00	PASS
40	5200	12.67	0.51	13.18	24.00	PASS
48	5240	12.77	0.51	13.28	24.00	PASS
802.11ax40						
38	5190	12.11	1.19	13.30	24.00	PASS
46	5230	12.56	1.19	13.75	24.00	PASS
802.11ax80						
42	5210	11.32	2.22	13.54	24.00	PASS

Antenna 1:
5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
149	5745	14.65	0	14.65	30.00	PASS
157	5785	14.39	0	14.39	30.00	PASS
165	5825	14.04	0	14.04	30.00	PASS
802.11n20						
129	5745	12.59	0.51	13.10	30.00	PASS
157	5785	13.31	0.51	13.82	30.00	PASS
165	5825	12.98	0.51	13.49	30.00	PASS
802.11ac20						
149	5745	13.80	0.18	13.98	30.00	PASS
157	5785	13.03	0.18	13.21	30.00	PASS
165	5825	13.28	0.18	13.46	30.00	PASS
802.11n40						
151	5755	13.27	0.22	13.49	30.00	PASS
159	5795	13.32	0.22	13.54	30.00	PASS
802.11ac40						
151	5755	13.27	0.22	13.49	30.00	PASS
159	5795	13.14	0.22	13.36	30.00	PASS
802.11ac80						
155	5775	13.07	0.18	13.25	30.00	PASS
802.11ax20						
149	5745	12.86	0.18	13.04	30.00	PASS
157	5785	13.11	0.18	13.29	30.00	PASS
165	5825	13.66	0.18	13.84	30.00	PASS
802.11ax40						
151	5755	12.10	1.19	13.29	30.00	PASS
159	5795	12.18	1.19	13.37	30.00	PASS
802.11ax80						
155	5775	13.36	0.18	13.54	30.00	PASS

Antenna 6:
5150-5250MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
36	5180	14.18	0	14.18	24.00	PASS
40	5200	14.17	0	14.17	24.00	PASS
48	5240	14.59	0	14.59	24.00	PASS
802.11n20						
36	5180	12.60	0.60	13.20	24.00	PASS
40	5200	12.91	0.60	13.51	24.00	PASS
48	5240	13.03	0.60	13.63	24.00	PASS
802.11ac20						
36	5180	12.51	0.76	13.27	24.00	PASS
40	5200	12.26	0.76	13.02	24.00	PASS
48	5240	13.02	0.76	13.78	24.00	PASS
802.11n40						
38	5190	12.12	1.31	13.43	24.00	PASS
46	5230	12.43	1.31	13.74	24.00	PASS
802.11ac40						
38	5190	12.29	0.76	13.05	24.00	PASS
46	5230	12.32	0.76	13.08	24.00	PASS
802.11ac80						
42	5210		0.86	13.44	24.00	PASS
802.11ax20						
36	5180	12.76	0.51	13.27	24.00	PASS
40	5200	12.63	0.51	13.14	24.00	PASS
48	5240	12.65	0.51	13.16	24.00	PASS
802.11ax40						
38	5190	12.99	0.56	13.55	24.00	PASS
46	5230	13.03	0.56	13.59	24.00	PASS
802.11ax80						
42	5210	11.33	2.22	13.55	24.00	PASS

Antenna 2:
5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
149	5745	14.96	0	14.96	30.00	PASS
157	5785	14.62	0	14.62	30.00	PASS
165	5825	14.57	0	14.57	30.00	PASS
802.11n20						
129	5745	13.68	0.22	13.90	30.00	PASS
157	5785	13.69	0.22	13.91	30.00	PASS
165	5825	13.18	0.22	13.40	30.00	PASS
802.11ac20						
149	5745	13.25	0.18	13.43	30.00	PASS
157	5785	13.46	0.18	13.64	30.00	PASS
165	5825	13.65	0.18	13.83	30.00	PASS
802.11n40						
151	5755	13.53	0.22	13.75	30.00	PASS
159	5795	13.27	0.22	13.49	30.00	PASS
802.11ac40						
151	5755	13.12	0.18	13.30	30.00	PASS
159	5795	13.14	0.18	13.32	30.00	PASS
802.11ac80						
155	5775	13.35	0.18	13.53	30.00	PASS
802.11ax20						
149	5745	13.11	0.22	13.33	30.00	PASS
157	5785	12.87	0.22	13.09	30.00	PASS
165	5825	13.18	0.22	13.40	30.00	PASS
802.11ax40						
151	5755	13.57	0.22	13.79	30.00	PASS
159	5795	13.54	0.22	13.76	30.00	PASS
802.11ax80						
155	5775	13.49	0.18	13.67	30.00	PASS

Antenna 7:
5150-5250MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
36	5180	14.71	0.13	14.84	24.00	PASS
40	5200	14.10	0.13	14.23	24.00	PASS
48	5240	14.03	0.13	14.16	24.00	PASS
802.11n20						
36	5180	12.90	0.76	13.66	24.00	PASS
40	5200	12.48	0.76	13.24	24.00	PASS
48	5240	12.83	0.76	13.59	24.00	PASS
802.11ac20						
36	5180	13.43	0.51	13.94	24.00	PASS
40	5200	13.00	0.51	13.51	24.00	PASS
48	5240	12.93	0.51	13.44	24.00	PASS
802.11n40						
38	5190	12.35	1.14	13.49	24.00	PASS
46	5230	12.29	1.14	13.43	24.00	PASS
802.11ac40						
38	5190	12.30	0.86	13.16	24.00	PASS
46	5230	12.90	0.86	13.76	24.00	PASS
802.11ac80						
42	5210	12.19	1.43	13.62	24.00	PASS
802.11ax20						
36	5180	12.51	1.14	13.65	24.00	PASS
40	5200	12.54	1.14	13.68	24.00	PASS
48	5240	12.57	1.14	13.71	24.00	PASS
802.11ax40						
38	5190	12.95	0.71	13.66	24.00	PASS
46	5230	13.06	0.71	13.77	24.00	PASS
802.11ax80						
42	5210	12.98	0.76	13.74	24.00	PASS

Antenna 3:
5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
149	5745	14.79	0.13	14.92	30.00	PASS
157	5785	14.73	0.13	14.86	30.00	PASS
165	5825	14.44	0.13	14.57	30.00	PASS
802.11n20						
129	5745	13.68	0.18	13.86	30.00	PASS
157	5785	13.67	0.18	13.85	30.00	PASS
165	5825	13.33	0.18	13.51	30.00	PASS
802.11ac20						
149	5745	13.11	0.22	13.33	30.00	PASS
157	5785	13.72	0.22	13.94	30.00	PASS
165	5825	13.60	0.22	13.82	30.00	PASS
802.11n40						
151	5755	13.75	0.22	13.97	30.00	PASS
159	5795	13.15	0.22	13.37	30.00	PASS
802.11ac40						
151	5755	13.61	0.18	13.79	30.00	PASS
159	5795	12.93	0.18	13.11	30.00	PASS
802.11ac80						
155	5775	13.52	0.22	13.74	30.00	PASS
802.11ax20						
149	5745	13.73	0.22	13.95	30.00	PASS
157	5785	13.66	0.22	13.88	30.00	PASS
165	5825	12.82	0.22	13.04	30.00	PASS
802.11ax40						
151	5755	13.61	0.22	13.83	30.00	PASS
159	5795	12.90	0.22	13.12	30.00	PASS
802.11ax80						
155	5775	13.37	0.22	13.59	30.00	PASS

Antenna 8:
5150-5250MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
36	5180	14.80	0.13	14.93	24.00	PASS
40	5200	14.30	0.13	14.43	24.00	PASS
48	5240	14.91	0.13	15.04	24.00	PASS
802.11n20						
36	5180	13.01	0.51	13.52	24.00	PASS
40	5200	12.97	0.51	13.48	24.00	PASS
48	5240	12.81	0.51	13.32	24.00	PASS
802.11ac20						
36	5180	13.09	0.51	13.60	24.00	PASS
40	5200	13.18	0.51	13.69	24.00	PASS
48	5240	12.97	0.51	13.48	24.00	PASS
802.11n40						
38	5190	12.62	1.08	13.70	24.00	PASS
46	5230	12.69	1.08	13.77	24.00	PASS
802.11ac40						
38	5190	12.87	0.51	13.38	24.00	PASS
46	5230	12.79	0.51	13.30	24.00	PASS
802.11ac80						
42	5210	12.17	1.49	13.66	24.00	PASS
802.11ax20						
36	5180	12.57	0.51	13.08	24.00	PASS
40	5200	13.20	0.51	13.71	24.00	PASS
48	5240	13.00	0.51	13.51	24.00	PASS
802.11ax40						
38	5190	12.45	1.37	13.82	24.00	PASS
46	5230	12.25	1.37	13.62	24.00	PASS
802.11ax80						
42	5210	11.80	1.67	13.47	24.00	PASS

Antenna 4:
5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
149	5745	14.36	0.13	14.49	30.00	PASS
157	5785	14.59	0.13	14.72	30.00	PASS
165	5825	14.40	0.13	14.53	30.00	PASS
802.11n20						
129	5745	12.82	0.22	13.04	30.00	PASS
157	5785	13.44	0.22	13.66	30.00	PASS
165	5825	13.05	0.22	13.27	30.00	PASS
802.11ac20						
149	5745	13.09	0.22	13.31	30.00	PASS
157	5785	12.81	0.22	13.03	30.00	PASS
165	5825	12.83	0.22	13.05	30.00	PASS
802.11n40						
151	5755	13.70	0.22	13.92	30.00	PASS
159	5795	12.88	0.22	13.10	30.00	PASS
802.11ac40						
151	5755	13.05	0.22	13.27	30.00	PASS
159	5795	13.15	0.22	13.37	30.00	PASS
802.11ac80						
155	5775	13.32	0.22	13.54	30.00	PASS
802.11ax20						
149	5745	13.60	0.22	13.82	30.00	PASS
157	5785	13.56	0.22	13.78	30.00	PASS
165	5825	13.45	0.22	13.67	30.00	PASS
802.11ax40						
151	5755	13.33	0.22	13.55	30.00	PASS
159	5795	13.43	0.22	13.65	30.00	PASS
802.11ax80						
155	5775	13.25	0.22	13.47	30.00	PASS

MIMO*4
5150-5250MHz:


Type	Channel	Power (dBm) ANT5	Power (dBm) ANT6	Power (dBm) ANT7	Power (dBm) ANT8	Total (dBm)	Limit (dBm)	Result
802.11n HT20	36	13.68	13.20	13.66	13.52	19.54	24.00	Pass
	40	13.46	13.51	13.24	13.48	19.44		
	48	13.71	13.63	13.59	13.32	19.59		
802.11ac20	36	13.33	13.27	13.94	13.60	19.56	24.00	Pass
	40	13.63	13.02	13.51	13.69	19.49		
	48	13.24	13.78	13.44	13.48	19.51		
802.11n HT40	38	13.36	13.43	13.49	13.70	19.52	24.00	Pass
	46	13.86	13.74	13.43	13.77	19.72		
802.11ac40	38	13.58	13.05	13.16	13.38	19.32	24.00	Pass
	46	13.23	13.08	13.76	13.30	19.37		
802.11ac80	42	13.24	13.44	13.62	13.66	19.51	24.00	Pass
802.11ax20	36	13.96	13.27	13.65	13.08	19.52	24.00	Pass
	40	13.18	13.14	13.68	13.71	19.46		
	48	13.28	13.16	13.71	13.51	19.44		
802.11ax40	38	13.3	13.55	13.66	13.82	19.61	24.00	Pass
	46	13.75	13.59	13.77	13.62	19.70		
802.11ax80	42	13.54	13.55	13.74	13.47	19.60	24.00	Pass

5725-5850MHz:

Type	Channel	Power (dBm) ANT0	Power (dBm) ANT0	Power (dBm) ANT0	Power (dBm) ANT1	Total (dBm)	Limit (dBm)	Result
802.11n HT20	149	13.10	13.90	13.86	13.04	19.51	30.00	Pass
	157	13.82	13.91	13.85	13.66	19.83		
	165	13.49	13.40	13.51	13.27	19.44		
802.11ac20	149	13.98	13.43	13.33	13.31	19.54	30.00	Pass
	157	13.21	13.64	13.94	13.03	19.49		
	165	13.46	13.83	13.82	13.05	19.57		
802.11n HT40	151	13.49	13.75	13.97	13.92	19.81	30.00	Pass
	159	13.54	13.49	13.37	13.10	19.40		
802.11ac40	151	13.49	13.30	13.79	13.27	19.49	30.00	Pass
	159	13.36	13.32	13.11	13.37	19.31		
802.11ac80	155	13.25	13.53	13.74	13.54	19.54	30.00	Pass
802.11ax20	149	13.04	13.33	13.95	13.82	19.57	30.00	Pass
	157	13.29	13.09	13.88	13.78	19.54		
	165	13.84	13.40	13.04	13.67	19.52		
802.11ax40	151	13.29	13.79	13.83	13.55	19.64	30.00	Pass
	159	13.37	13.76	13.12	13.65	19.50		
802.11ax80	155	13.54	13.67	13.59	13.47	19.59	30.00	Pass

4.5. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 789033 D02 General UNII Test Procedures New Rules v01 F: The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission

- a. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- b. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- c. Make the following adjustments to the peak value of the spectrum, if applicable:
 1. If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 2.) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d. The result is the Maximum PSD over 1 MHz reference bandwidth.
- e. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
 1. Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
 2. Set $VBW \geq 3 \text{ RBW}$.
 3. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 4. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 5. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100 \text{ KHz}$ is available on nearly all spectrum analyzers.
- f. Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

TEST RESULTS

Temperature	23.6°C	Humidity	55.7%
Test Engineer	Moon Tan	Configurations	IEEE 802.11a/n/ac

Antenna 5:
5150-5250MHz:
802.11a Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	2.33	0	0	2.33	11	PASS
40	5200	2.86	0	0	2.86	11	PASS
48	5240	-2.46	0	0	-2.46	11	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-7.56	0.76	0	-6.80	11	PASS
40	5200	-6.36	0.76	0	-5.60	11	PASS
48	5240	-6.19	0.76	0	-5.43	11	PASS

802.11n40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-4.90	1.61	0	-3.29	11	PASS
46	5230	-6.09	1.61	0	-4.48	11	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-3.66	0.51	0	-3.15	11	PASS
40	5200	-2.24	0.51	0	-1.73	11	PASS
48	5240	-2.74	0.51	0	-2.23	11	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-6.26	0.60	0	-5.66	11	PASS
46	5230	-4.97	0.60	0	-4.37	11	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-7.80	1.43	0	-6.37	11	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.32	0.51	0	-1.81	11	PASS
40	5200	-2.07	0.51	0	-1.56	11	PASS
48	5240	-2.76	0.51	0	-2.25	11	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.88	1.19	0	-4.69	11	PASS
46	5230	-6.07	1.19	0	-4.88	11	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-9.21	2.22	0	-6.99	11	PASS

Antenna 1:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	8.11	0	2.2	10.31	30	PASS
157	5785	7.55	0	2.2	9.75	30	PASS
165	5825	9.07	0	2.2	11.27	30	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	2.52	0.51	2.2	5.23	30	PASS
157	5785	3.89	0.51	2.2	6.60	30	PASS
165	5825	3.72	0.51	2.2	6.43	30	PASS

802.11n40Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-0.21	0.22	2.2	2.21	30	PASS
157	5795	-0.35	0.22	2.2	2.07	30	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	2.63	0.18	2.2	5.01	30	PASS
157	5785	3.47	0.18	2.2	5.85	30	PASS
165	5825	3.98	0.18	2.2	6.36	30	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	0.16	0.22	2.2	2.58	30	PASS
157	5795	0.43	0.22	2.2	2.85	30	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-3.41	0.18	2.2	-1.03	30	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	3.89	0.18	2.2	6.27	30	PASS
157	5785	4.22	0.18	2.2	6.60	30	PASS
165	5825	4.27	0.18	2.2	6.65	30	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	0.53	1.19	2.2	3.92	30	PASS
157	5795	1.32	1.19	2.2	4.71	30	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-2.61	0.18	2.2	-0.23	30	PASS

Antenna 6:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.80	0	0	-2.80	11	PASS
40	5200	2.94	0	0	2.94	11	PASS
48	5240	2.64	0	0	2.64	11	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-4.50	0.60	0	-3.90	11	PASS
40	5200	-3.36	0.60	0	-2.76	11	PASS
48	5240	-2.41	0.60	0	-1.81	11	PASS

802.11n40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.80	1.31	0	-4.49	11	PASS
46	5230	-5.42	1.31	0	-4.11	11	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-6.56	0.76	0	-5.80	11	PASS
40	5200	-4.32	0.76	0	-3.56	11	PASS
48	5240	-3.79	0.76	0	-3.03	11	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-6.54	0.76	0	-5.78	11	PASS
46	5230	-6.54	0.76	0	-5.78	11	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	1.31	0.86	0	2.17	11	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.48	0.51	0	-1.97	11	PASS
40	5200	-2.24	0.51	0	-1.73	11	PASS
48	5240	-1.25	0.51	0	-0.74	11	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.64	0.56	0	-5.08	11	PASS
46	5230	-4.59	0.56	0	-4.03	11	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-6.51	2.22	0	-4.29	11	PASS

Antenna 2:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	8.94	0	2.2	11.14	30	PASS
157	5785	11.82	0	2.2	14.02	30	PASS
165	5825	9.76	0	2.2	11.96	30	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	0.90	0.22	2.2	3.32	30	PASS
157	5785	0.54	0.22	2.2	2.96	30	PASS
165	5825	0.84	0.22	2.2	3.26	30	PASS

802.11n40Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-1.82	0.22	2.2	0.60	30	PASS
157	5795	-1.29	0.22	2.2	1.13	30	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	1.04	0.18	2.2	3.42	30	PASS
157	5785	0.77	0.18	2.2	3.15	30	PASS
165	5825	1.00	0.18	2.2	3.38	30	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-1.51	0.18	2.2	0.87	30	PASS
157	5795	-1.89	0.18	2.2	0.49	30	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-5.19	0.18	2.2	-2.81	30	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	2.01	0.22	2.2	4.43	30	PASS
157	5785	2.50	0.22	2.2	4.92	30	PASS
165	5825	2.62	0.22	2.2	5.04	30	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-0.77	0.22	2.2	1.65	30	PASS
157	5795	0.82	0.22	2.2	3.24	30	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-4.23	0.18	2.2	-1.85	30	PASS

Antenna 7:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.90	0.13	0	-2.77	11	PASS
40	5200	-3.12	0.13	0	-2.99	11	PASS
48	5240	-2.46	0.13	0	-2.33	11	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-1.62	0.76	0	-0.86	11	PASS
40	5200	-2.00	0.76	0	-1.24	11	PASS
48	5240	-1.27	0.76	0	-0.51	11	PASS

802.11n40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-4.55	1.14	0	-3.41	11	PASS
46	5230	-4.89	1.14	0	-3.75	11	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.29	0.51	0	-1.78	11	PASS
40	5200	-2.61	0.51	0	-2.10	11	PASS
48	5240	-1.86	0.51	0	-1.35	11	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.18	0.86	0	-4.32	11	PASS
46	5230	-3.44	0.86	0	-2.58	11	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-7.54	1.43	0	-6.11	11	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-3.11	1.14	0	-1.97	11	PASS
40	5200	-2.29	1.14	0	-1.15	11	PASS
48	5240	-1.56	1.14	0	-0.42	11	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.73	0.71	0	-5.02	11	PASS
46	5230	-4.78	0.71	0	-4.07	11	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-8.00	0.76	0	-7.24	11	PASS

Antenna 3:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	6.61	0.13	2.2	8.94	30	PASS
157	5785	6.73	0.13	2.2	9.06	30	PASS
165	5825	7.39	0.13	2.2	9.72	30	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	0.55	0.18	2.2	2.93	30	PASS
157	5785	1.04	0.18	2.2	3.42	30	PASS
165	5825	0.95	0.18	2.2	3.33	30	PASS

802.11n40Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-1.40	0.22	2.2	1.02	30	PASS
157	5795	-0.53	0.22	2.2	1.89	30	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	1.85	0.22	2.2	4.27	30	PASS
157	5785	1.47	0.22	2.2	3.89	30	PASS
165	5825	1.90	0.22	2.2	4.32	30	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	0.09	0.18	2.2	2.47	30	PASS
157	5795	2.61	0.18	2.2	4.99	30	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-2.62	0.22	2.2	-0.20	30	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	6.59	0.22	2.2	9.01	30	PASS
157	5785	5.47	0.22	2.2	7.89	30	PASS
165	5825	7.00	0.22	2.2	9.42	30	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	3.19	0.22	2.2	5.61	30	PASS
157	5795	3.10	0.22	2.2	5.52	30	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-1.16	0.22	2.2	1.26	30	PASS

Antenna 8:
5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.40	0.13	0	-2.27	11	PASS
40	5200	-2.10	0.13	0	-1.97	11	PASS
48	5240	2.99	0.13	0	3.12	11	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.94	0.51	0	-2.43	11	PASS
40	5200	-2.84	0.51	0	-2.33	11	PASS
48	5240	-0.89	0.51	0	-0.38	11	PASS

802.11n40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-4.80	1.08	0	-3.72	11	PASS
46	5230	-4.54	1.08	0	-3.46	11	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-1.74	0.51	0	-1.23	11	PASS
40	5200	-2.03	0.51	0	-1.52	11	PASS
48	5240	0.22	0.51	0	0.73	11	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-5.10	0.51	0	-4.59	11	PASS
46	5230	-3.56	0.51	0	-3.05	11	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-6.41	1.49	0	-4.92	11	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-2.07	0.51	0	-1.56	11	PASS
40	5200	-2.12	0.51	0	-1.61	11	PASS
48	5240	-1.17	0.51	0	-0.66	11	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-3.20	1.37	0	-1.83	11	PASS
46	5230	-3.63	1.37	0	-2.26	11	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-6.53	1.67	0	-4.86	11	PASS

Antenna 4:**5725-5850MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	8.57	0.13	2.2	10.90	30	PASS
157	5785	9.94	0.13	2.2	12.27	30	PASS
165	5825	10.28	0.13	2.2	12.61	30	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	3.49	0.22	2.2	5.91	30	PASS
157	5785	4.81	0.22	2.2	7.23	30	PASS
165	5825	3.71	0.22	2.2	6.13	30	PASS

802.11n40Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	1.25	0.22	2.2	3.67	30	PASS
157	5795	2.18	0.22	2.2	4.60	30	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	4.19	0.22	2.2	6.61	30	PASS
157	5785	4.85	0.22	2.2	7.27	30	PASS
165	5825	5.17	0.22	2.2	7.59	30	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	1.09	0.22	2.2	3.51	30	PASS
157	5795	1.51	0.22	2.2	3.93	30	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-1.90	0.22	2.2	0.52	30	PASS

802.11ax20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	5.70	0.22	2.2	8.12	30	PASS
157	5785	6.54	0.22	2.2	8.96	30	PASS
165	5825	6.71	0.22	2.2	9.13	30	PASS

802.11ax40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	3.20	0.22	2.2	5.62	30	PASS
157	5795	2.84	0.22	2.2	5.26	30	PASS

802.11ax80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-0.94	0.22	2.2	1.48	30	PASS

Note:

1. The test results including the cable lose.

MIMO*4**5150-5250MHz:**

Type	Channel	PSD (dBm/1M Hz) ANT5	PSD (dBm/1M Hz) ANT6	PSD (dBm/1M Hz) ANT7	PSD (dBm/1M Hz) ANT8	Total (dBm/1M Hz)	Limit (dBm/1M Hz)	Result
802.11 n HT20	36	-6.80	-3.90	-0.86	-2.43	3.03	8.98	Pass
	40	-5.60	-2.76	-1.24	-2.33	3.31		
	48	-5.43	-1.81	-0.51	-0.38	4.39		
802.11 n HT40	38	-3.29	-4.49	-3.41	-3.72	2.32	8.98	Pass
	46	-4.48	-4.11	-3.75	-3.46	2.09		
802.11 ac20	36	-3.15	-5.80	-1.78	-1.23	3.35	8.98	Pass
	40	-1.73	-3.56	-2.10	-1.52	3.86		
	48	-2.23	-3.03	-1.35	0.73	4.79		
802.11 ac40	38	-5.66	-5.78	-4.32	-4.59	0.98	8.98	Pass
	46	-4.37	-5.78	-2.58	-3.05	2.25		
802.11 ac80	42	-6.37	2.17	-6.11	-4.92	3.88	8.98	Pass
802.11 ax20	36	-1.81	-1.97	-1.97	-1.56	4.20	8.98	Pass
	40	-1.56	-1.73	-1.15	-1.61	4.51		
	48	-2.25	-0.74	-0.42	-0.66	5.06		
802.11 ax40	38	-4.69	-5.08	-5.02	-1.83	2.10	8.98	Pass
	46	-4.88	-4.03	-4.07	-2.26	2.32		
802.11 ax80	42	-6.99	-4.29	-7.24	-4.86	0.37	8.98	Pass

MIMO*4

5725-5850MHz:

Type	Channel	PSD (dBm/500 KHz) ANT1	PSD (dBm/500 KHz) ANT2	PSD (dBm/500 KHz) ANT3	PSD (dBm/500K Hz) ANT4	Total (dBm/500K Hz)	Limit (dBm/500K Hz)	Result
802.11 n HT20	149	5.23	3.32	2.93	5.91	10.55	27.98	Pass
	157	6.60	2.96	3.42	7.23	11.47		
	165	6.43	3.26	3.33	6.13	11.06		
802.11 n HT40	151	2.21	0.60	1.02	3.67	8.06	27.98	Pass
	159	2.07	1.13	1.89	4.60	8.66		
802.11 ac20	149	5.01	3.42	4.27	6.61	11.01	27.98	Pass
	157	5.85	3.15	3.89	7.27	11.37		
	165	6.36	3.38	4.32	7.59	11.75		
802.11 ac40	151	2.58	0.87	2.47	3.51	8.48	27.98	Pass
	159	2.85	0.49	4.99	3.93	9.38		
802.11 ac80	155	-1.03	-2.81	-0.20	0.52	5.31	27.98	Pass
802.11 ax20	149	6.27	4.43	9.01	8.12	13.32	27.98	Pass
	157	6.60	4.92	7.89	8.96	13.36		
	165	6.65	5.04	9.42	9.13	13.94		
802.11 ax40	151	3.92	1.65	5.61	5.62	10.50	27.98	Pass
	159	4.71	3.24	5.52	5.26	10.79		
802.11 ax80	155	-0.23	-1.85	1.26	1.48	6.38	27.98	Pass

Remark:

The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;
 Array gain = $10 \log(N_{ant})$, where N_{ant} is the number of transmit antennas
 Directional Gain=8.02 dBi