

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.66, 7.12) @ 2480 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Bluetooth_DH5_Ch78/Edge 4_0mm/Area Scan (8x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.281 W/kg

Tablet/Bluetooth_DH5_Ch78/Edge 4_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.546 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.292 W/kg

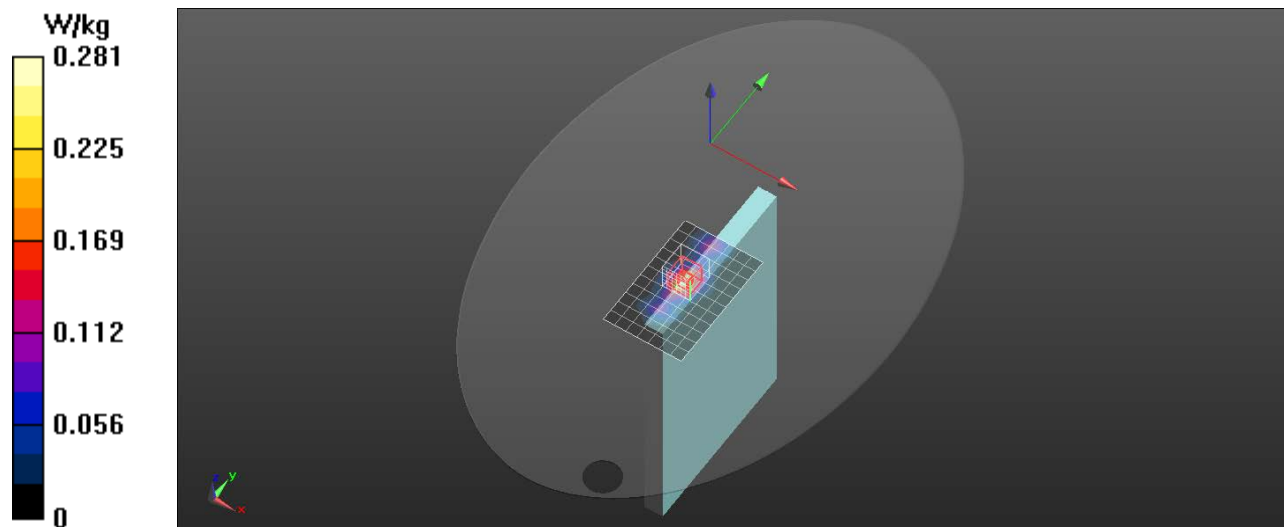

Bluetooth Low Energy

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.66, 7.12) @ 2480 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/BLE_1M_Ch39/Edge 4_0mm/Area Scan (8x12x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.225 W/kg

Tablet/BLE_1M_Ch39/Edge 4_0mm/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.054 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.255 W/kg

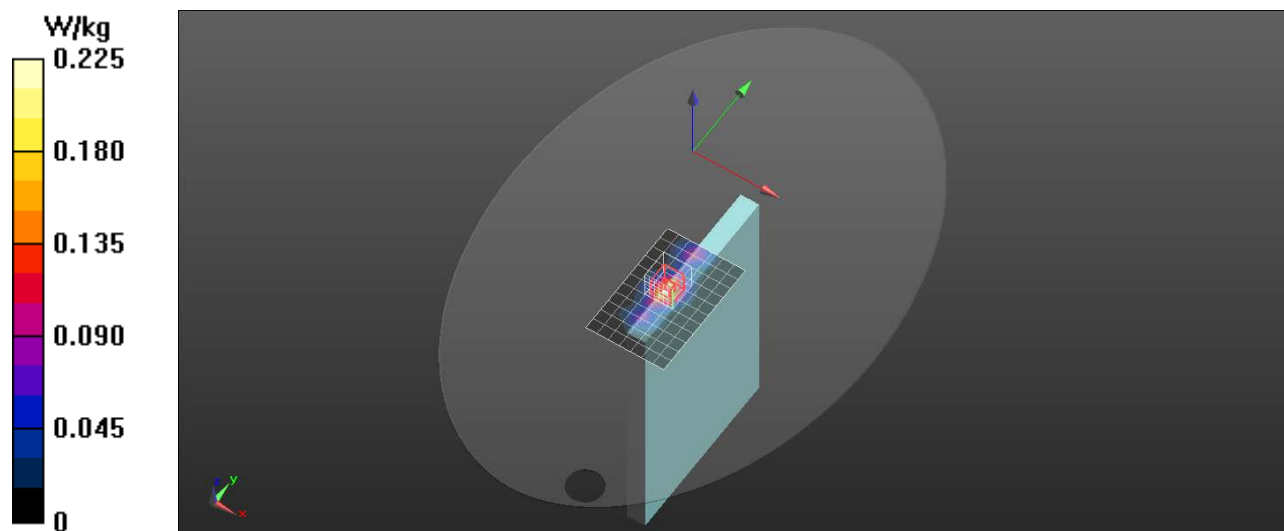

WIFI-2.4GHz

Frequency: 2422 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 38.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.66, 7.12) @ 2422 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/802.11 n40_Ch3/Edge 4_0mm/Area Scan (8x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.34 W/kg

Tablet /Main Ant/802.11 n40_Ch3/Edge 4_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.22 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.61 W/kg

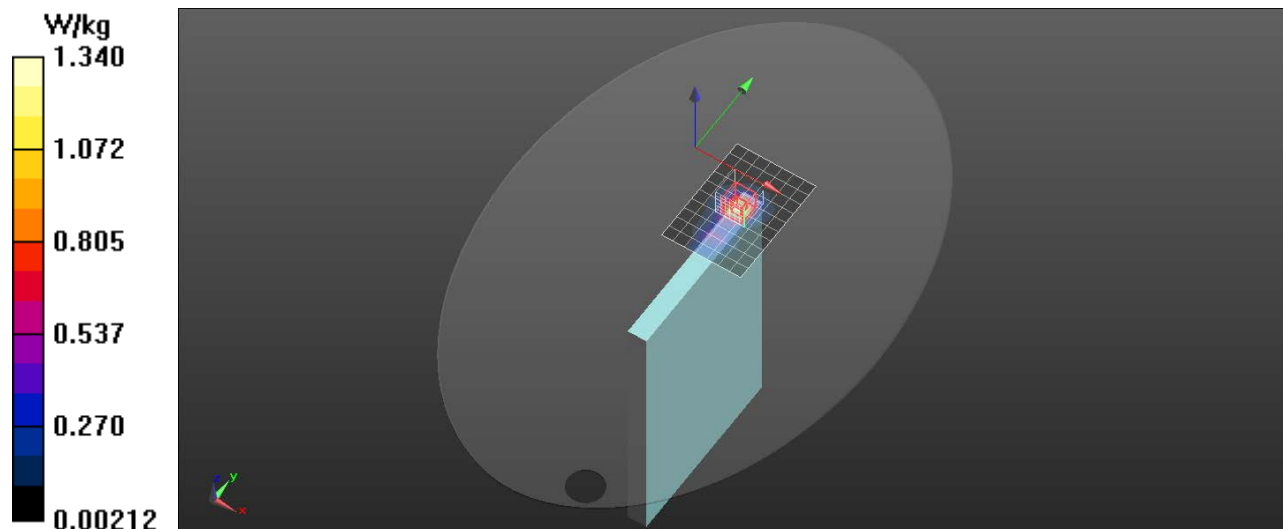

WIFI-2.4GHz

Frequency: 2452 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2452$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 37.985$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.66, 7.12) @ 2452 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/802.11 n40_Ch9/Edge 4_0mm/Area Scan (8x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg

Tablet/Aux Ant/802.11 n40_Ch9/Edge 4_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 1.37 W/kg

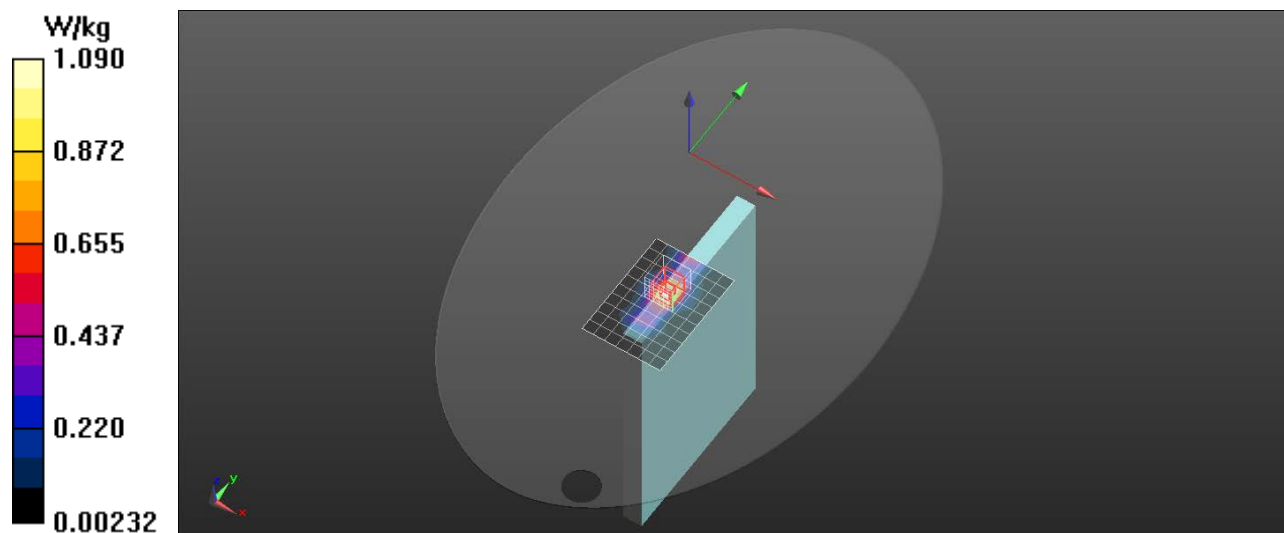

WIFI-5GHz

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.785$ S/m; $\epsilon_r = 35.77$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(5.36, 5.44, 4.91) @ 5250 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/802.11 ac160_Band 1&2_Ch50/Edge 4_0mm/Area Scan (9x9x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.29 W/kg

Tablet/Main Ant/802.11 ac160_Band 1&2_Ch50/Edge 4_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.897 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 2.35 W/kg

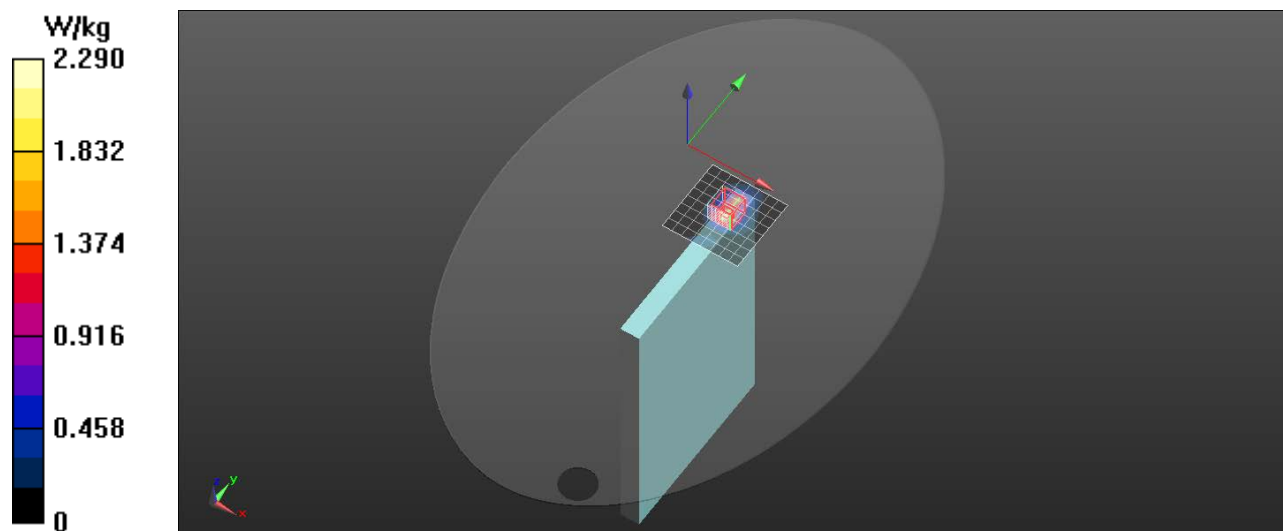

WIFI-5GHz

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.785$ S/m; $\epsilon_r = 35.77$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(5.36, 5.44, 4.91) @ 5250 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/802.11 ac160_Band 1&2_Ch50/Edge 4_0mm/Area Scan (9x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.25 W/kg

Tablet/Aux Ant/802.11 ac160_Band 1&2_Ch50/Edge 4_0mm /Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.898 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 2.30 W/kg

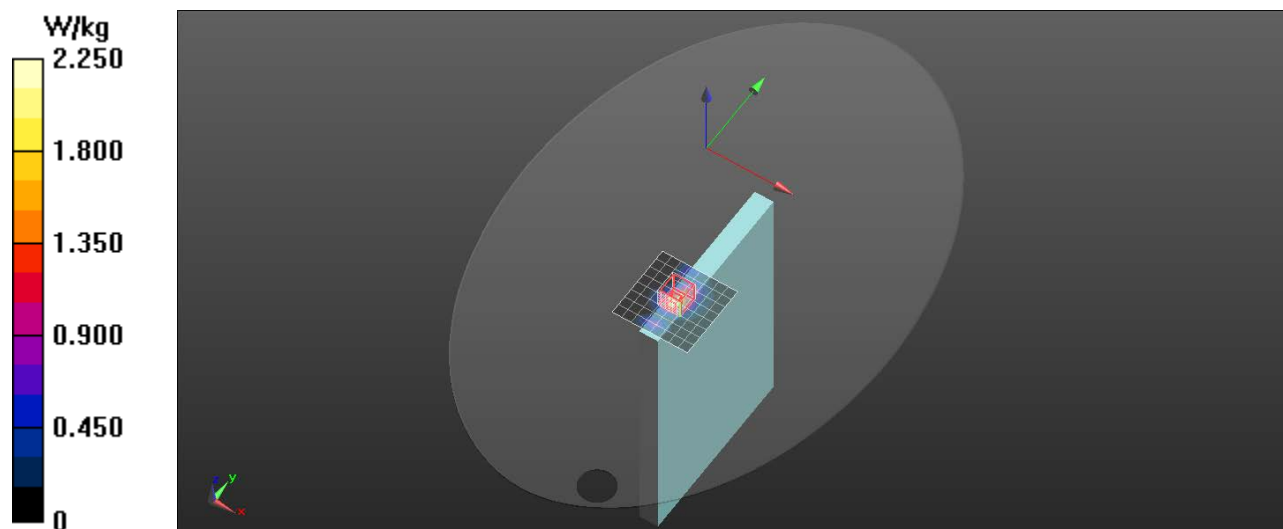

WIFI-5GHz

Frequency: 5570 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5570$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 34.977$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(4.57, 4.65, 4.21) @ 5570 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/802.11 ac160_Band 3_Ch114/Edge 4_0mm /Area Scan (9x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.39 W/kg

Tablet/Main Ant/802.11 ac160_Band 3_Ch114/Edge 4_0mm /Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.839 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 4.37 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 2.55 W/kg

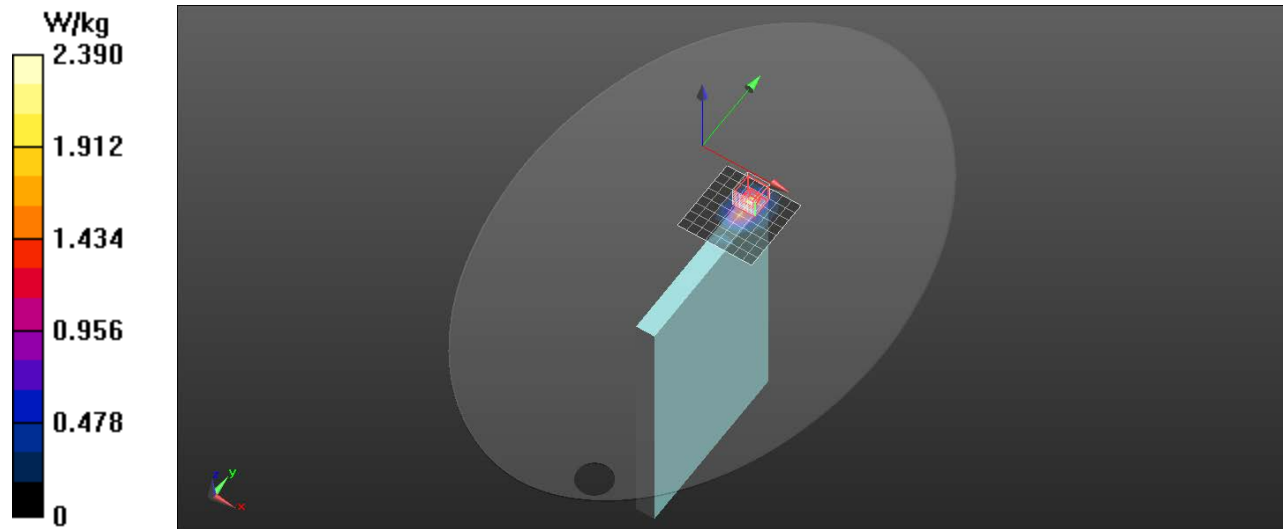

WIFI-5GHz

Frequency: 5570 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5570$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 34.977$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(4.57, 4.65, 4.21) @ 5570 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/802.11 ac160_Band 3_Ch114/Edge 4_0mm/Area Scan (9x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.46 W/kg

Tablet/Aux Ant/802.11 ac160_Band 3_Ch114/Edge 4_0mm /Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.72 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.393 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 2.58 W/kg

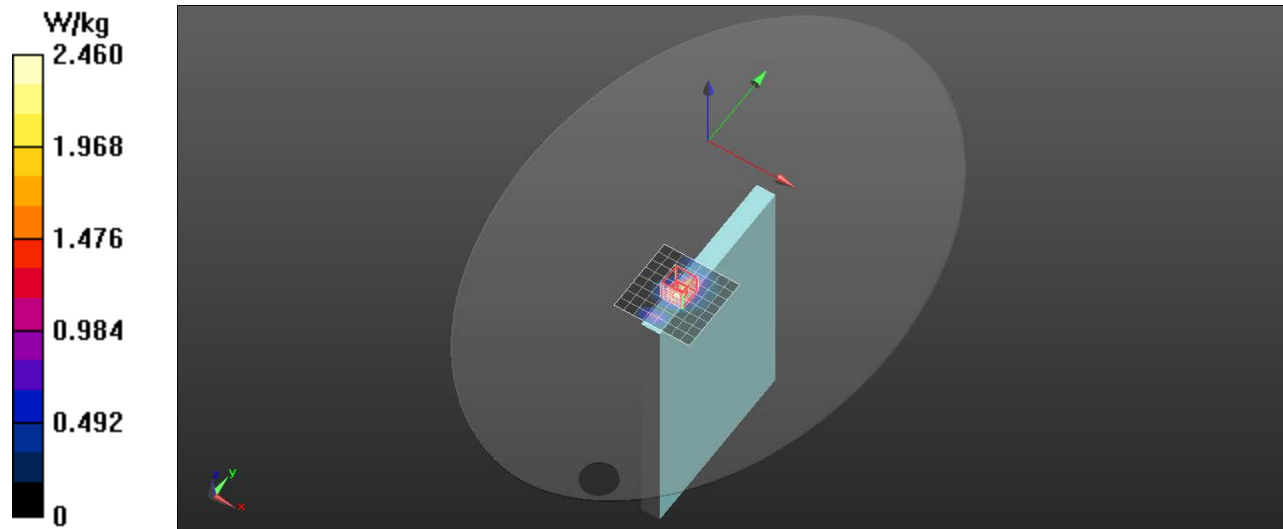

WIFI-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.401$ S/m; $\epsilon_r = 34.477$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(4.67, 4.76, 4.28) @ 5775 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/802.11 ac80_Band 4_Ch155/Edge 4_0mm/Area Scan (9x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.03 W/kg

Tablet/Main Ant/802.11 ac80_Band 4_Ch155/Edge 4_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.941 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 4.02 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 2.24 W/kg

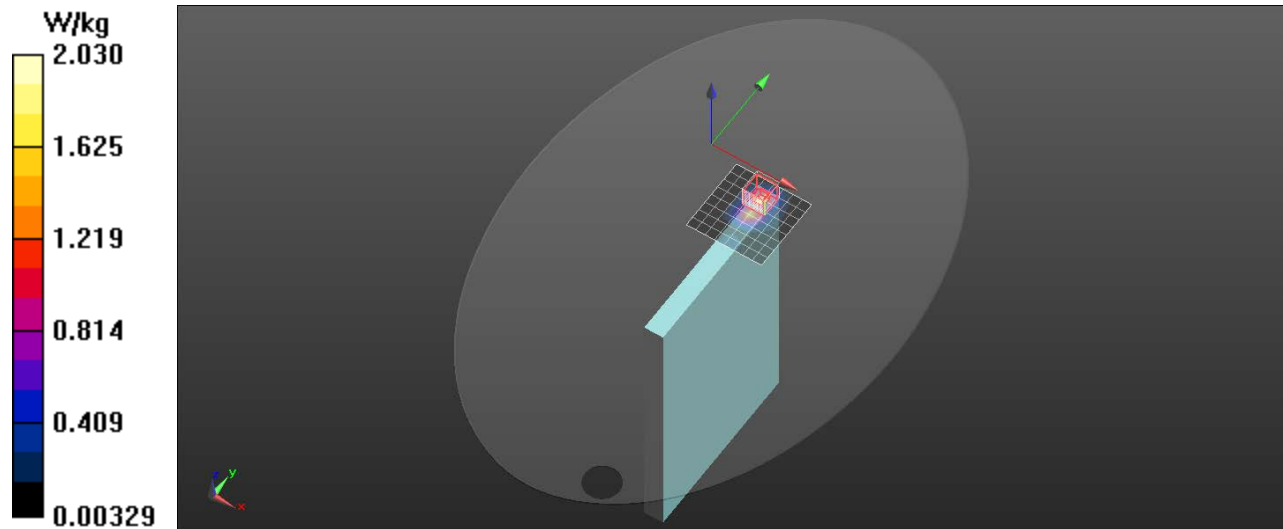

WIFI-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.401$ S/m; $\epsilon_r = 34.477$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(4.67, 4.76, 4.28) @ 5775 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/802.11 ac80_Band 4_Ch155/Edge 4_0mm/Area Scan (9x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.28 W/kg

Tablet/Aux Ant/802.11 ac80_Band 4_Ch155/Edge 4_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.86 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 4.41 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 2.51 W/kg

