

TEST REPORT**Report Number: 20110474HKG-001**

Application for Original Grant of 47 CFR Part 15 Certification

Single New of RSS-247 Issue 2 Equipment

FCC ID: 2AX9X-PMP10072420**IC: 26722-PMP10072420**

This report contains data of Bluetooth BLE only

Prepared and Checked by:**Approved by:**

Signed On File

Wong Cheuk Ho, Herbert
Lead EngineerWong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: November 27, 2020

TEST REPORT

GENERAL INFORMATION

| | |
|------------------------------------|---|
| Applicant Name: | PM STUDIO PARIS |
| Applicant Address: | 37 rue Marcel Dassault 92100 Boulogne-Billancourt France |
| FCC Specification Standard: | FCC Part 15, October 1, 2019 Edition |
| FCC ID: | 2AX9X-PMP10072420 |
| FCC Model(s): | BT-6055 |
| IC Specification Standard: | RSS-247 Issue 2, February 2017 RSS-Gen Issue 5 Amendment 1, March 2019 |
| IC: | 26722-PMP10072420 |
| PMN: | BT-6055 |
| HVIN: | BT-6055 |
| Type of EUT: | Spread Spectrum Transmitter |
| Description of EUT: | Azzaro Wanted By Night Headphones 2021 |
| Serial Number: | N/A |
| Sample Receipt Date: | November 11, 2020 |
| Date of Test: | November 11, 2020 to November 25, 2020 |
| Report Date: | November 27, 2020 |
| Environmental Conditions: | Temperature: +10 to 40°C Humidity: 10 to 90% |
| Conclusion: | Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification. |

TEST REPORT**TABLE OF CONTENTS**

| | |
|--|-----------|
| 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE | 4 |
| 1.1 Summary of Test Results..... | 4 |
| 1.2 Statement of Compliance..... | 4 |
| 2.0 GENERAL DESCRIPTION..... | 5 |
| 2.1 Product Description | 5 |
| 2.2 Test Methodology | 5 |
| 2.3 Test Facility | 5 |
| 2.4 Related Submittal(s) Grants | 5 |
| 3.0 SYSTEM TEST CONFIGURATION..... | 6 |
| 3.1 Justification | 6 |
| 3.2 EUT Exercising Software | 7 |
| 3.3 Details of EUT and Description of Accessories..... | 8 |
| 3.4 Measurement Uncertainty..... | 8 |
| 4.0 TEST RESULTS | 9 |
| 4.1 Maximum Conducted Output Power at Antenna Terminals | 9 |
| 4.2 Minimum 6dB RF Bandwidth..... | 10 |
| 4.3 Maximum Power Spectral Density | 13 |
| 4.4 Out of Band Conducted Emissions | 16 |
| 4.5 Field Strength Calculation..... | 21 |
| 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions..... | 22 |
| 4.6.1 Radiated Emission Configuration Photograph | 22 |
| 4.6.2 Radiated Emission Data..... | 22 |
| 4.6.3 Radiated Emission Test Setup..... | 27 |
| 4.6.4 Transmitter Duty Cycle Calculation | 28 |
| 4.7 AC Power Line Conducted Emission | 29 |
| 4.7.1 AC Power Line Conducted Emission Configuration Photograph | 29 |
| 4.7.2 AC Power Line Conducted Emission Data..... | 29 |
| 4.7.3 Conducted Emission Test Setup | 30 |
| 4.8 Occupied Bandwidth | 31 |
| 5.0 EQUIPMENT LIST | 32 |

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

| Test Items | FCC Part 15 Section | RSS-247/ RSS-Gen# Section | Results | Details See Section |
|--|----------------------------|---------------------------------|---------|---------------------------|
| Antenna Requirement | 15.203 | 7.1.2# | Pass | 2.1 |
| Max. Conducted Output Power (Peak) | 15.247(b)(3)&(4) | 5.4(4) | Pass | 4.1 |
| Min. 6dB RF Bandwidth | 15.247(a)(2) | 5.2(1) | Pass | 4.2 |
| Max. Power Density (average) | 15.247(e) | 5.2(2) | Pass | 4.3 |
| Out of Band Antenna Conducted Emission | 15.247(d) | 5.5 | Pass | 4.4 |
| Radiated Emission in Restricted Bands and Spurious Emissions | 15.247(d), 15.209 & 15.109 | 5.5 | Pass | 4.6 |
| AC Power Line Conducted Emission | 15.207 & 15.107 | 7.2.4# | Pass | 4.7 |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2019 Edition

RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 Amendment 1, March 2019

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) is a Azzaro Wanted By Night Headphones 2021 with Bluetooth audio playback feature, which occupies a frequency range of 2402MHz to 2480MHz. The EUT supports Bluetooth 3.0 and BLE. The EUT is powered by 3.7V internal rechargeable battery (3.7VDC).

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

This report contains data of Bluetooth BLE only

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 + Amendment 1, March 2019).

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Intertek Testing Services Hong Kong Ltd., which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with FCC and Industry Canada No. 2042H.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (Bluetooth portion).

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 3.7VDC (1X 3.7V fully charged internal rechargeable battery).

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

TEST REPORT

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes and data rates have been tested, and the worst-case data is included in this report.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

(1) The EUT is powered by DC 3.7V (1X 3.7V fully charged internal rechargeable battery)

Description of Accessories:

(1) N/A

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


TEST REPORT

4.0 TEST RESULTS

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

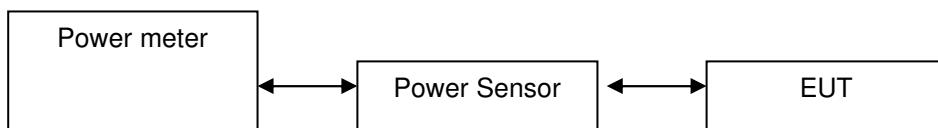

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

| Bluetooth 1 Mbps, Antenna Gain = 0 dBi | | | |
|--|---------------|-----------------|--|
| Frequency (MHz) | Output in dBm | Output in mWatt | |
| Low Channel: 2402 | -0.52 | 0.89 | |
| Middle Channel: 2440 | -0.62 | 0.87 | |
| High Channel: 2480 | -0.88 | 0.82 | |

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: included in OFFSET function
 added to SA raw reading

Bluetooth 1 Mbps

max. conducted (peak) output level = -0.52 dBm

Limits:

1W (30dBm) for antennas with gains of 6dBi or less

 W (dBm) for antennas with gains more than 6dBi

TEST REPORT**4.2 Minimum 6dB RF Bandwidth**

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

| Bluetooth 1 Mbps | |
|------------------|---------------------|
| Frequency (MHz) | 6dB Bandwidth (MHz) |
| Low Channel: | 2402 |
| Middle Channel: | 2440 |
| High Channel: | 2480 |

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

Bluetooth 1 Mbps, Lowest Channel

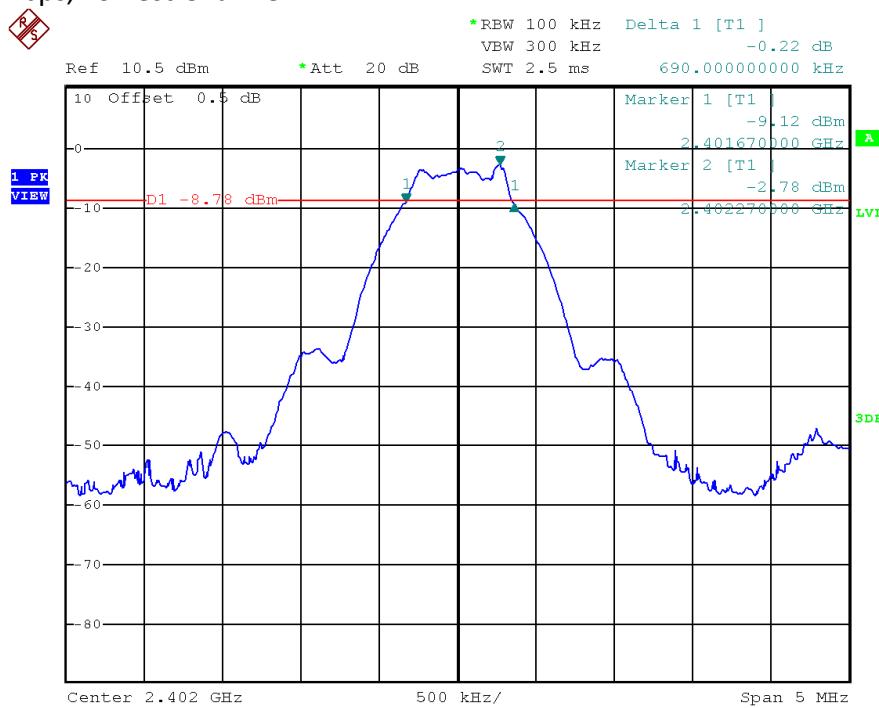


Bluetooth 1 Mbps, Middle Channel

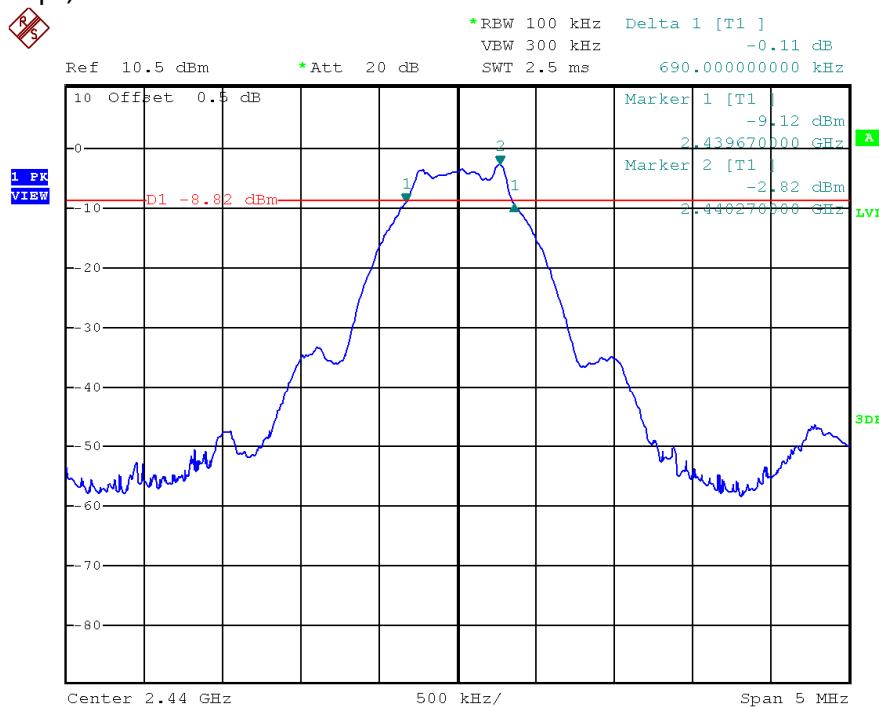

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

Bluetooth 1 Mbps, Highest Channel

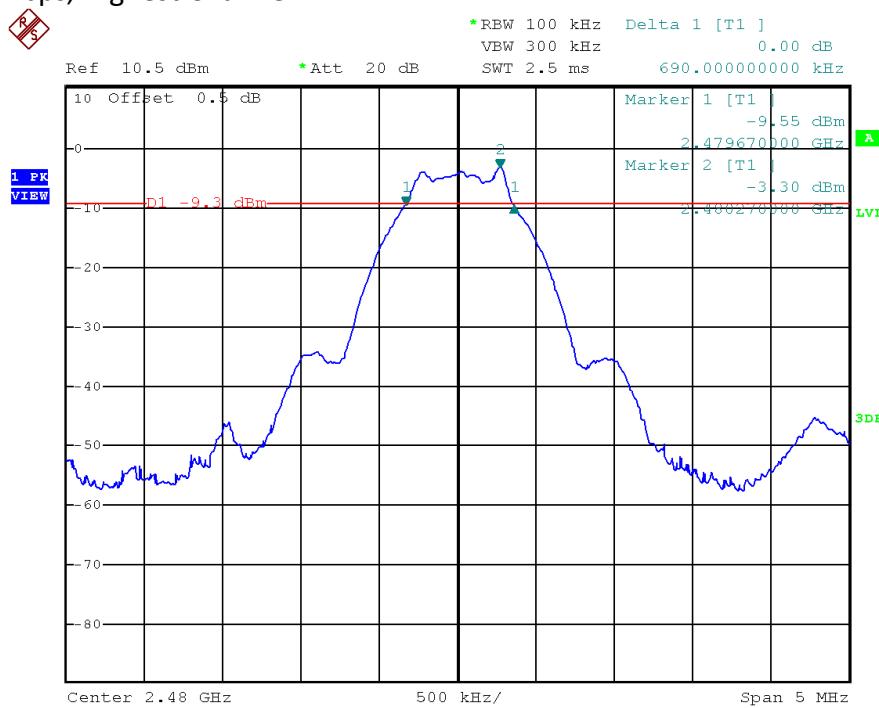

TEST REPORT**4.3 Maximum Power Spectral Density**

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

| Bluetooth 1 Mbps | | |
|----------------------|---------------------|-------|
| Frequency (MHz) | PSD in 100kHz (dBm) | |
| Low Channel: 2402 | | -2.70 |
| Middle Channel: 2440 | | -2.80 |
| High Channel: 2480 | | -3.28 |

Cable Loss: 0.5 dB


Limit:
8dBm

The plots of power spectral density are as below.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

Bluetooth 1 Mbps, Lowest channel

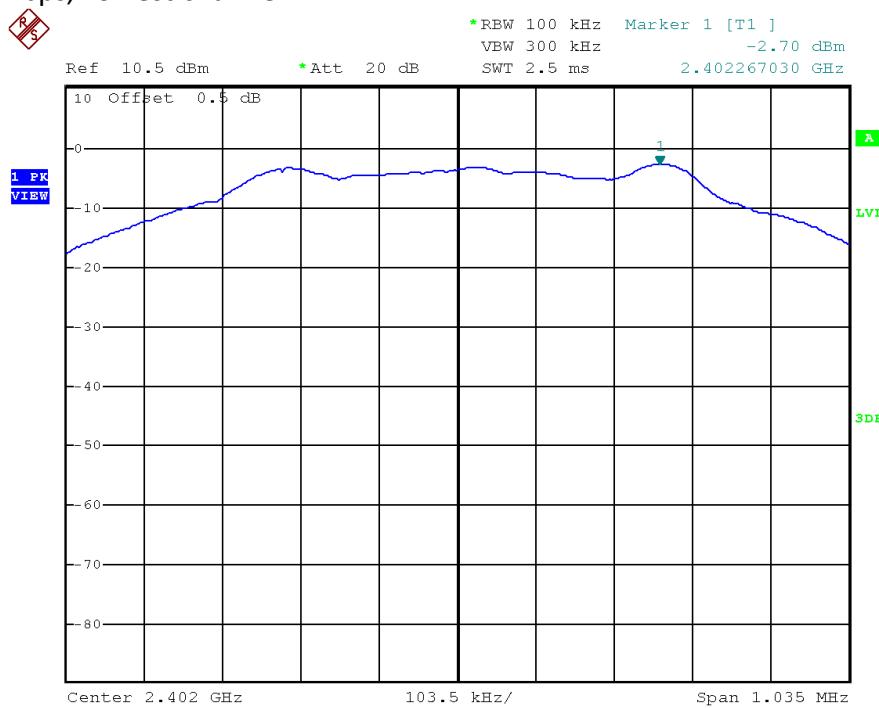


Bluetooth 1 Mbps, Middle channel

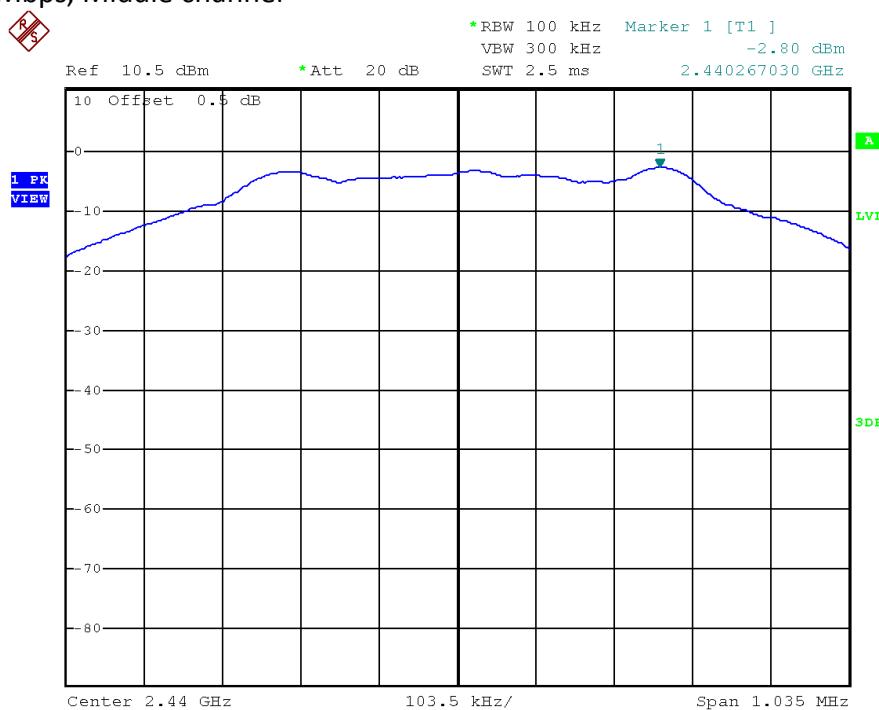

TEST REPORT**PLOTS OF POWER SPECTRAL DENSITY**

Bluetooth 1 Mbps, Highest channel

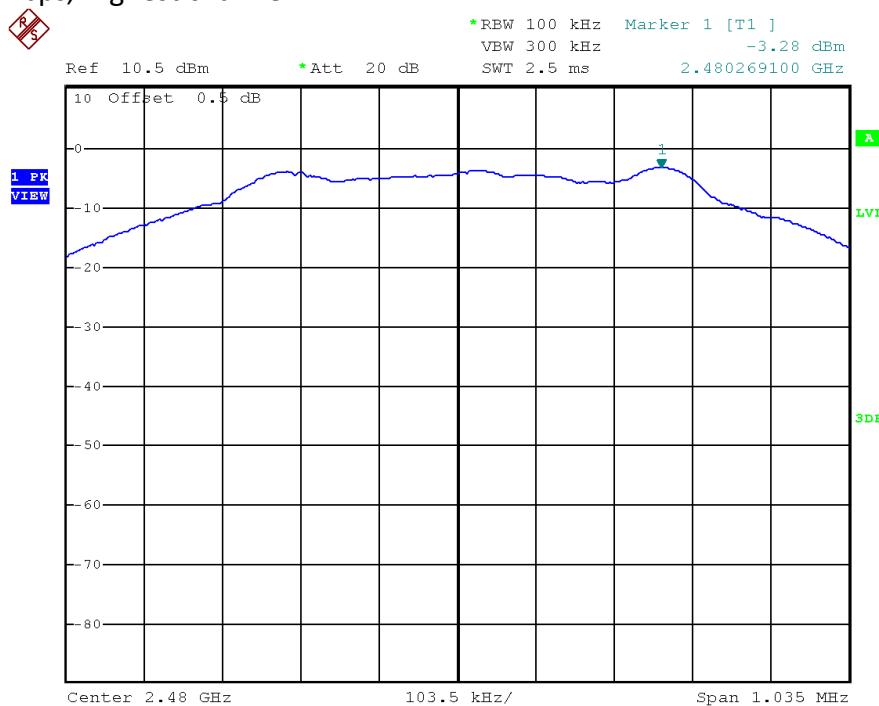

TEST REPORT

4.4 Out of Band Conducted Emissions

For Bluetooth 1 Mbps, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for Bluetooth 1 Mbps.

The measurement procedures under sections 11 of KDB No.558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Bluetooth 1 Mbps, Lowest Channel, Bandedge

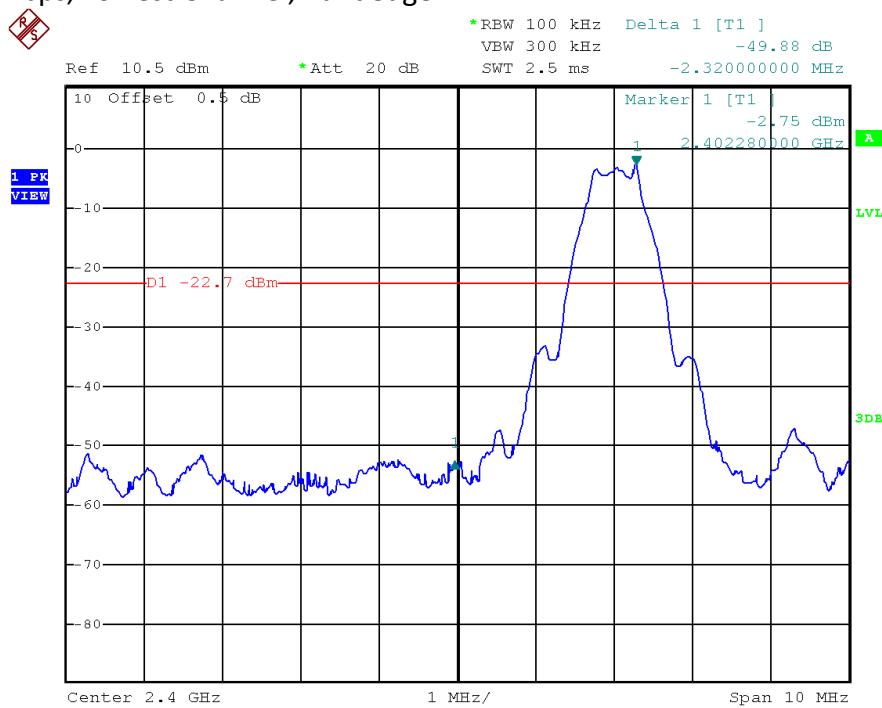


Bluetooth 1 Mbps, Highest Channel, Bandedge

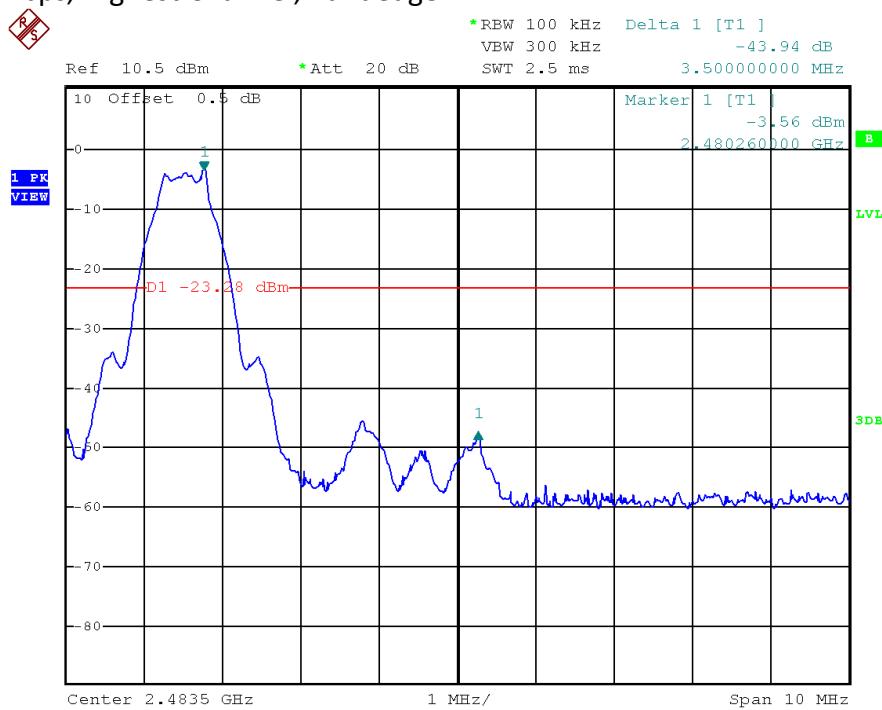


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Bluetooth 1 Mbps, Lowest Channel, Plot A

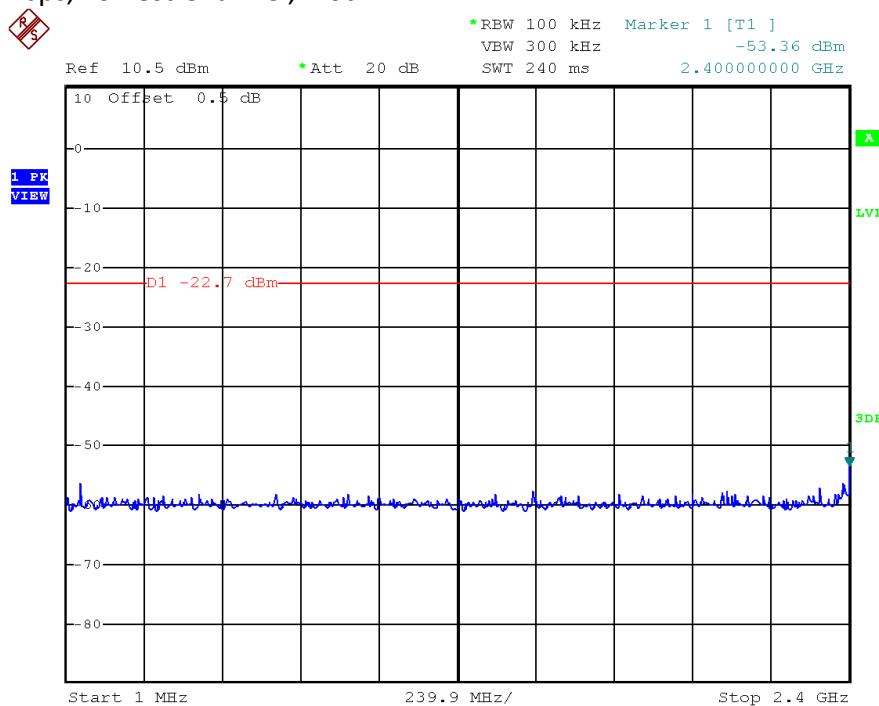


Bluetooth 1 Mbps, Lowest Channel, Plot B

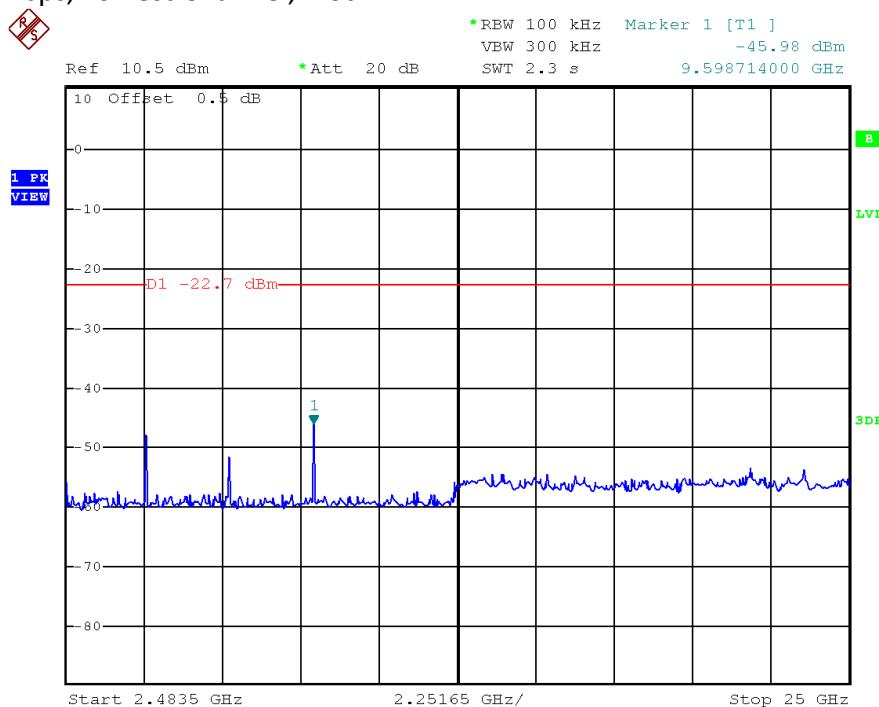


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Bluetooth 1 Mbps, Middle Channel, Plot A

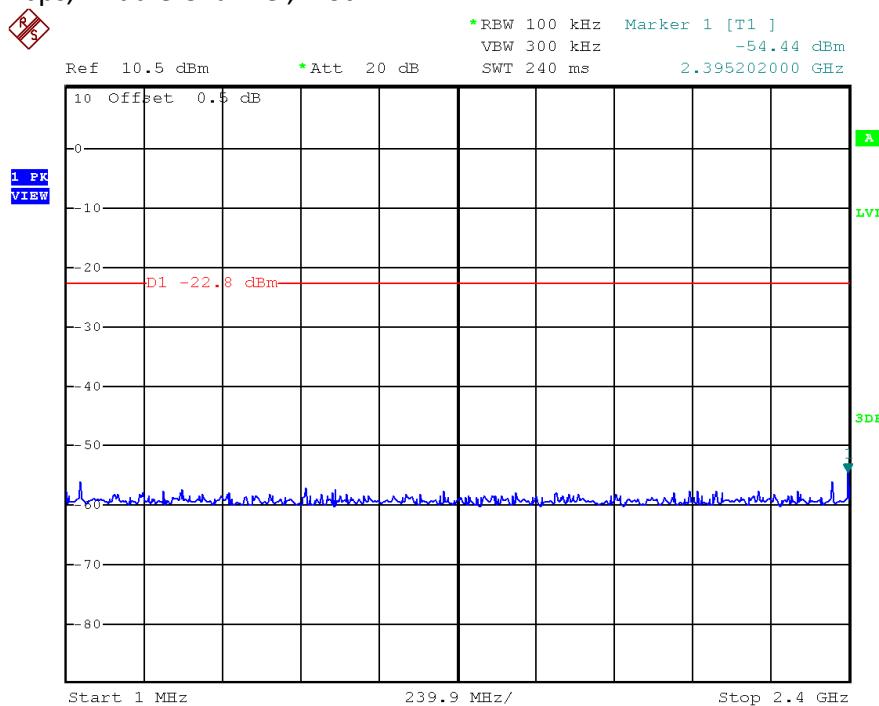


Bluetooth 1 Mbps, Middle Channel, Plot B

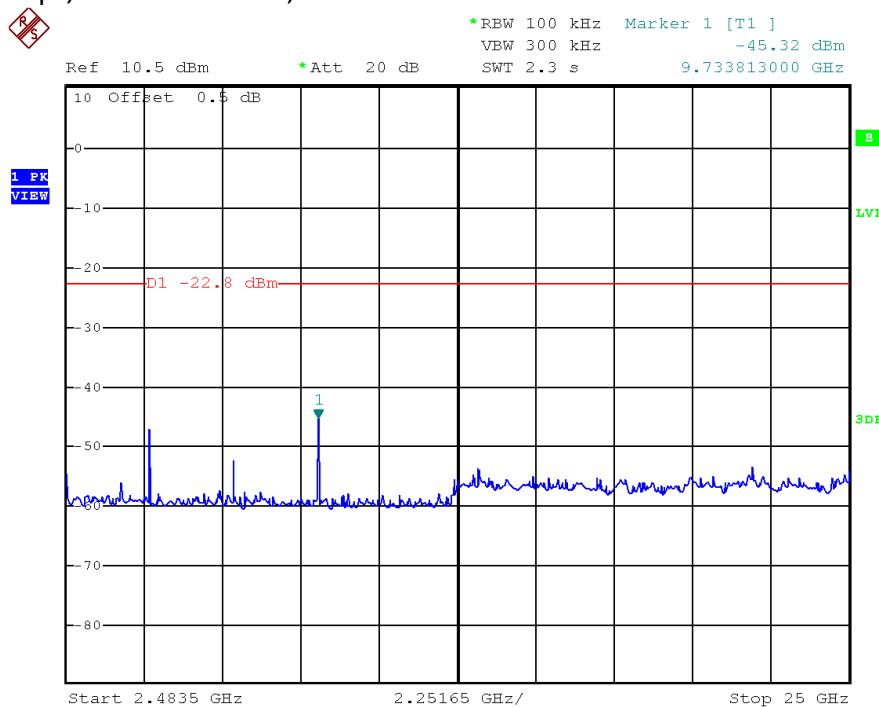


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Bluetooth 1 Mbps, Highest Channel, Plot A

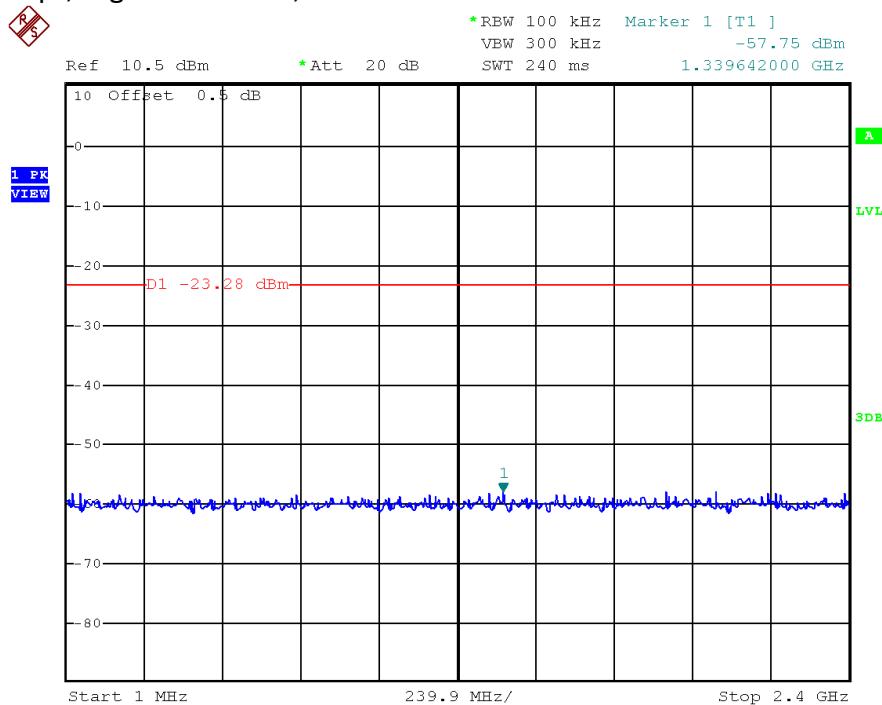

Bluetooth 1 Mbps, Highest Channel, Plot B

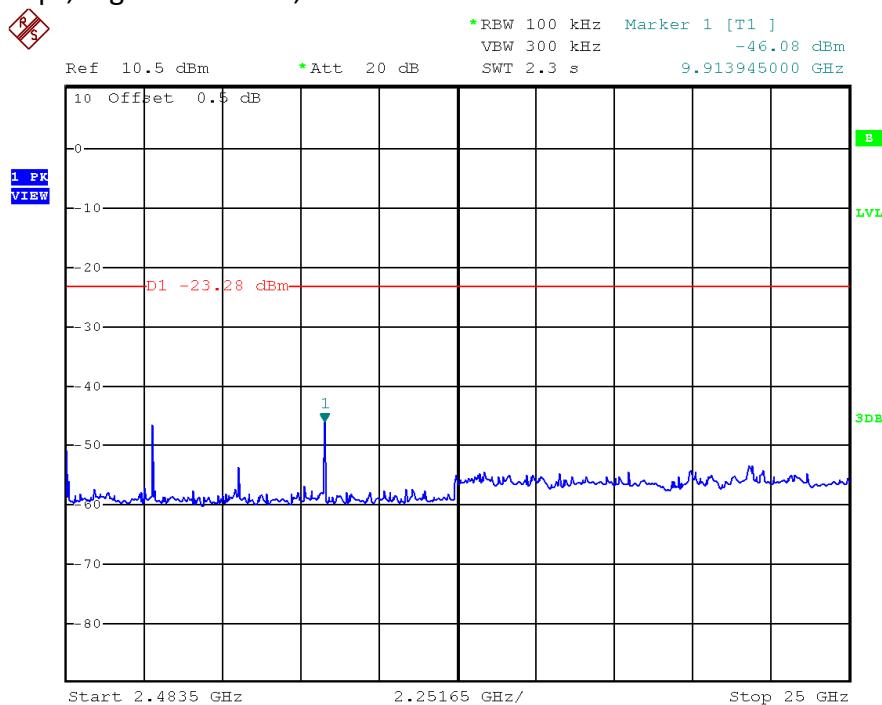

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ is converted to its corresponding level in $\mu\text{V}/\text{m}$.

RA = 62.0 $\text{dB}\mu\text{V}$

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2390 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 11.2 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1
 Bluetooth 1 Mbps

| Polari-zation | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dB μ V/m) | Average Limit at 3m (dB μ V/m) | Margin (dB) |
|---------------|------------------|----------------------|-------------------|---------------------|------------------------------------|------------------------------------|--------------|
| V | 2390.000 | 46.4 | 33 | 29.4 | 42.8 | 54.0 | -11.2 |
| V | 4804.000 | 28.9 | 33 | 34.9 | 30.8 | 54.0 | -23.2 |
| V | 12010.000 | 29.7 | 33 | 40.5 | 37.2 | 54.0 | -16.8 |

| Polari-zation | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB μ V/m) | Peak Limit at 3m (dB μ V/m) | Margin (dB) |
|---------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| V | 2390.000 | 58.2 | 33 | 29.4 | 54.6 | 74.0 | -19.4 |
| V | 4804.000 | 42.5 | 33 | 34.9 | 44.4 | 74.0 | -29.6 |
| V | 12010.000 | 43.3 | 33 | 40.5 | 50.8 | 74.0 | -23.2 |

NOTES:

1. Peak detector is used for the emission measurement.
2. Average measurement is according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 06

 Table 2
 Bluetooth 1 Mbps

| Polari-zation | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dB μ V/m) | Average Limit at 3m (dB μ V/m) | Margin (dB) |
|---------------|------------------|----------------------|-------------------|---------------------|------------------------------------|------------------------------------|--------------|
| V | 4880.000 | 27.9 | 33 | 34.9 | 29.8 | 54.0 | -24.2 |
| H | 7320.000 | 27.7 | 33 | 37.9 | 32.6 | 54.0 | -21.4 |
| V | 12200.000 | 29.4 | 33 | 40.5 | 36.9 | 54.0 | -17.2 |

| Polari-zation | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB μ V/m) | Peak Limit at 3m (dB μ V/m) | Margin (dB) |
|---------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| V | 4880.000 | 41.6 | 33 | 34.9 | 43.5 | 74.0 | -30.5 |
| H | 7320.000 | 40.9 | 33 | 37.9 | 45.8 | 74.0 | -28.2 |
| V | 12200.000 | 42.9 | 33 | 40.5 | 50.4 | 74.0 | -23.6 |

NOTES:

1. Peak detector is used for the emission measurement.
2. Average measurement is according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: TX-Channel 11

 Table 3
 Bluetooth 1 Mbps

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Average (dB μ V/m) | Average Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|------------------|----------------------|-------------------|---------------------|------------------------------------|------------------------------------|--------------|
| V | 2483.500 | 46.2 | 33 | 29.4 | 42.6 | 54.0 | -11.4 |
| V | 4960.000 | 30.5 | 33 | 34.9 | 32.4 | 54.0 | -21.6 |
| H | 7440.000 | 28.3 | 33 | 37.9 | 33.2 | 54.0 | -20.8 |
| V | 12400.000 | 26.5 | 33 | 40.5 | 34.0 | 54.0 | -20.0 |

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB μ V/m) | Peak Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| V | 2483.500 | 59.8 | 33 | 29.4 | 56.2 | 74.0 | -17.8 |
| V | 4960.000 | 43.9 | 33 | 34.9 | 45.8 | 74.0 | -28.2 |
| H | 7440.000 | 41.3 | 33 | 37.9 | 46.2 | 74.0 | -27.8 |
| V | 12400.000 | 43.1 | 33 | 40.5 | 50.6 | 74.0 | -23.4 |

NOTES:

1. Peak detector is used for the emission measurement.
2. Average measurement is according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

TEST REPORT

Mode: Normal

Table 4

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB μ V/m) | Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|--------------|
| V | 74.116 | 31.4 | 16 | 6.0 | 21.4 | 40.0 | -18.6 |
| V | 131.522 | 25.2 | 16 | 14.0 | 23.2 | 43.5 | -20.3 |
| V | 159.552 | 27.2 | 16 | 16.0 | 27.2 | 43.5 | -16.3 |
| H | 161.504 | 32.2 | 16 | 16.0 | 32.2 | 43.5 | -11.3 |
| H | 191.974 | 27.8 | 16 | 16.0 | 27.8 | 43.5 | -15.7 |
| V | 360.402 | 20.6 | 16 | 24.0 | 28.6 | 46.0 | -17.4 |


NOTES:

1. Quasi-Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

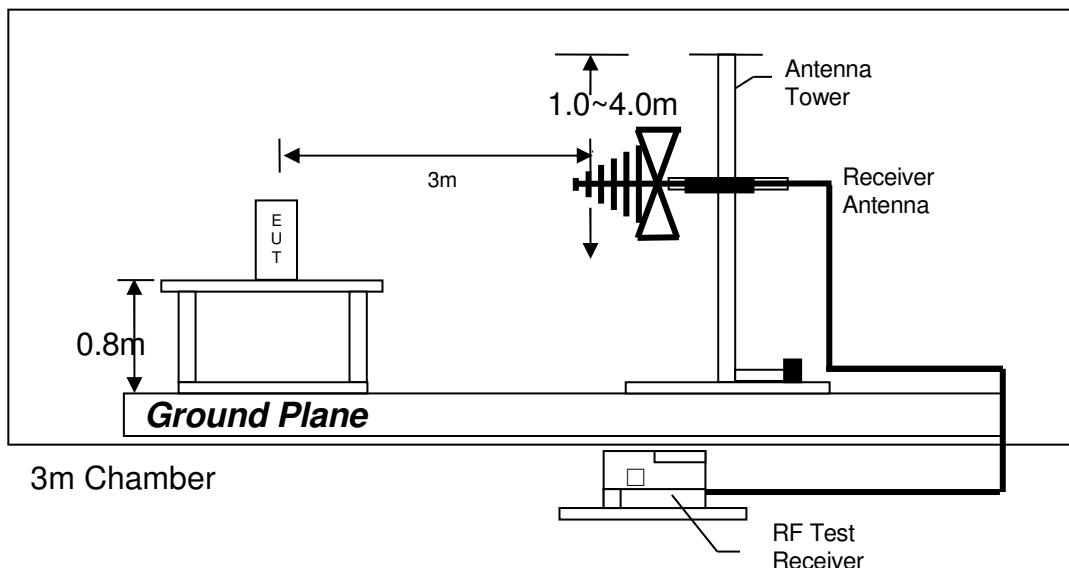

Test setup of radiated emissions up to 1GHz

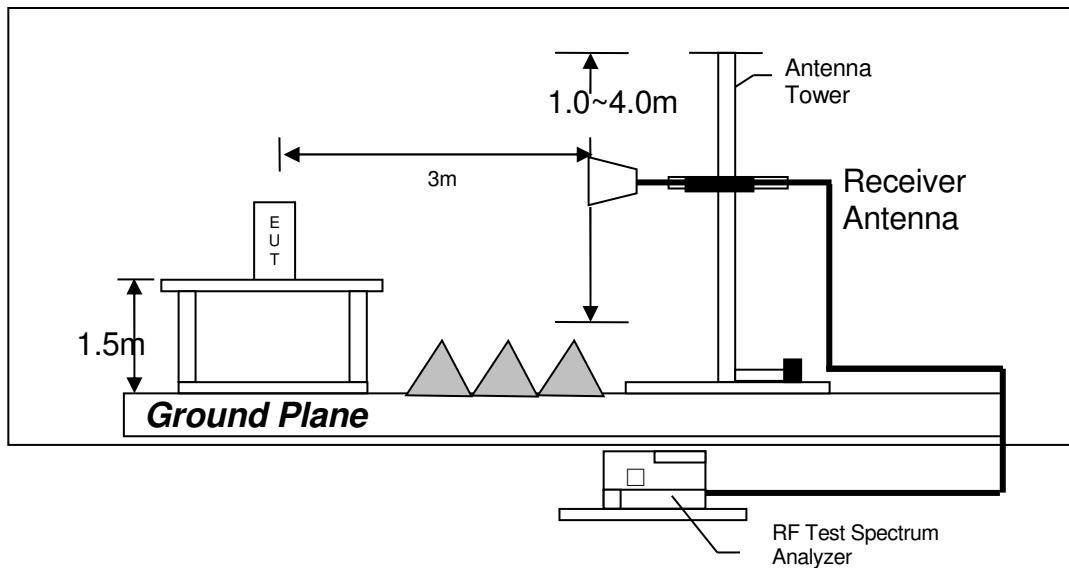

Test setup of radiated emissions above 1GHz

TEST REPORT

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

TEST REPORT**4.7 AC Power Line Conducted Emission**

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.


4.7.1 AC Power Line Conducted Emission Configuration Photograph

N/A

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

N/A

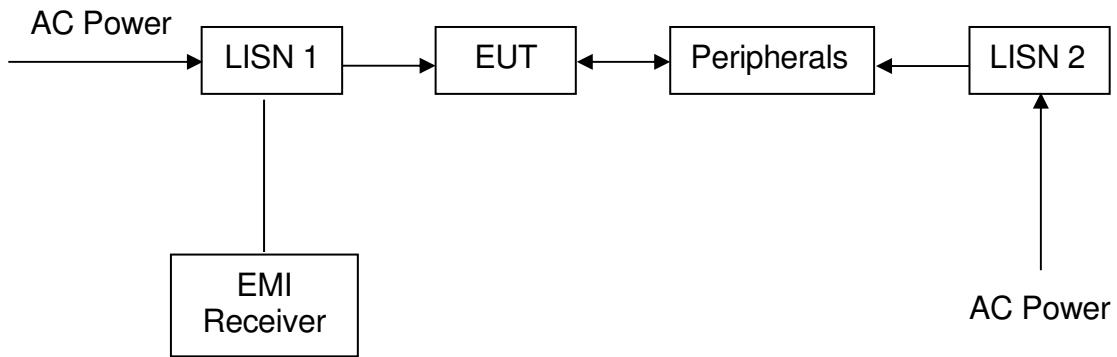TEST REPORT**4.7.3 Conducted Emission Test Setup**


TEST REPORT

4.8 Occupied Bandwidth

Occupied Bandwidth Results: (Bluetooth 1Mbps)

| Bluetooth 1Mbps | Occupied Bandwidth (MHz) |
|----------------------|--------------------------|
| Low Channel: 2402 | 1.032 |
| Middle Channel: 2440 | 1.032 |
| High Channel: 2480 | 1.032 |

The worst case is shown as below

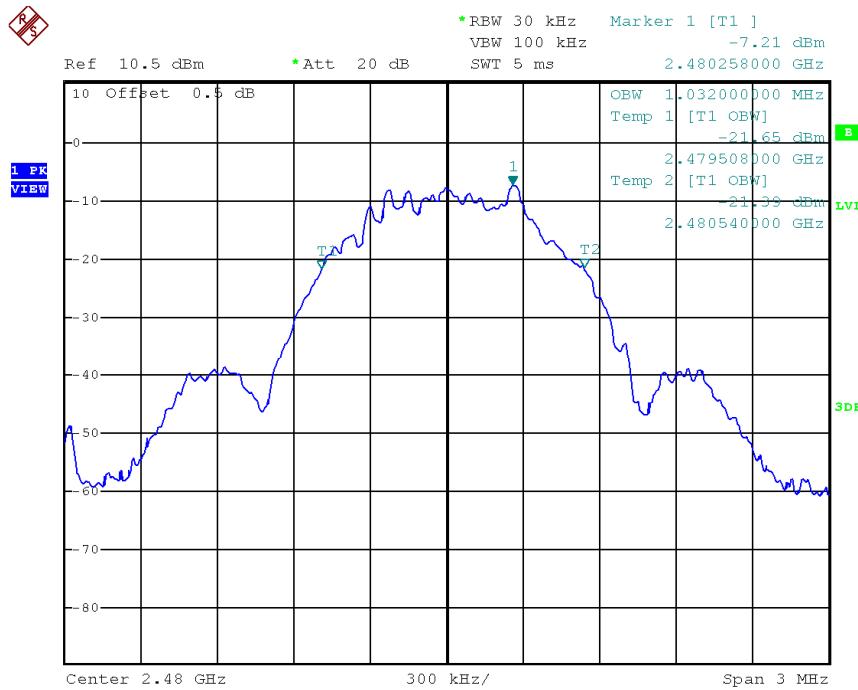

TEST REPORT

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

| Equipment | EMI Test Receiver (9kHz to 3GHz) | Spectrum Analyzer | Biconical Antenna |
|----------------------|---|--------------------------------------|-----------------------------------|
| Registration No. | EW-2500 | EW-2466 | EW-0571 |
| Manufacturer | ROHDE SCHWARZ | ROHDE SCHWARZ | EMCO |
| Model No. | ESCI | FSP30 | 3104C |
| Calibration Date | January 09, 2020 | September 05, 2020 | July 23, 2019 |
| Calibration Due Date | January 09, 2021 | September 05, 2021 | January 23, 2021 |
| Equipment | Log Periodic Antenna | Double Ridged Guide Antenna | RF Cable 14m (1GHz to 26.5GHz) |
| Registration No. | EW-0447 | EW-0194 | EW-3151 |
| Manufacturer | EMCO | EMCO | GREATBILLION |
| Model No. | 3146 | 3115 | SMA m/SHF5MPU /SMA m ra14m,26G |
| Calibration Date | September 25, 2019 | September 26, 2019 | March 04, 2020 |
| Calibration Due Date | March 25, 2021 | March 26, 2021 | March 04, 2021 |
| Equipment | Active Loop H-field (9kHz to 30MHz) | RF Preamplifier (9kHz to 6000MHz) | Pyramidal Horn Antenna |
| Registration No. | EW-2313 | EW-3006b | EW-0905 |
| Manufacturer | ELECTROMETRI | SCHWARZBECK | EMCO |
| Model No. | EM-6876 | BBV9718 | 3160-09 |
| Calibration Date | December 17, 2019 | November 25, 2019 | July 23, 2019 |
| Calibration Due Date | June 17, 2021 | November 25, 2020 | January 23, 2021 |
| Equipment | 14m Double Shield RF Cable (20MHz To 6GHz) | | |
| Registration No. | EW-2074 | | |
| Manufacturer | RADIALL | | |
| Model No. | nm / RG142 / sma 14m | | |
| Calibration Date | August 29, 2020 | | |
| Calibration Due Date | August 29, 2021 | | |

TEST REPORT

2) Conducted Emissions Test

| Equipment | RF Cable 80cm (RG142) (9kHz to 30MHz) | Artificial Mains Network | EMI Test Receiver (9kHz to 3GHz) |
|----------------------|---|--------------------------|-------------------------------------|
| Registration No. | EW-2451 | EW-2501 | EW-2500 |
| Manufacturer | RADIALL | ROHDE SCHWARZ | ROHDE SCHWARZ |
| Model No. | RF Cable 80cm (RG142) (9kHz to 30MHz) | ENV-216 | ESCI |
| Calibration Date | December 08, 2019 | September 15, 2020 | January 09, 2020 |
| Calibration Due Date | December 08, 2020 | September 15, 2021 | January 09, 2021 |

3) Conductive Measurement Test

| Equipment | Spectrum Analyzer | RF Cable (up to 40GHz) 1.5m length | RF Power Meter with Power Sensor |
|----------------------|--------------------|---------------------------------------|-------------------------------------|
| Registration No. | EW-2466 | EW-2774 | EW-3309 |
| Manufacturer | ROHDE SCHWARZ | N/A | ROHDE SCHWARZ |
| Model No. | FSP30 | SMA-M to SMA-M | NRP-Z81 |
| Calibration Date | September 05, 2020 | September 12, 2020 | May 18, 2020 |
| Calibration Due Date | September 05, 2021 | September 12, 2021 | May 18, 2021 |

4) Bandwidth/Bandedge Measurement Test

| Equipment | RF Cable (up to 40GHz) 1.5m length | Spectrum Analyzer |
|----------------------|---------------------------------------|--------------------|
| Registration No. | EW-2774 | EW-2466 |
| Manufacturer | N/A | ROHDE SCHWARZ |
| Model No. | SMA-M to SMA-M | FSP30 |
| Calibration Date | September 12, 2020 | September 05, 2020 |
| Calibration Due Date | September 12, 2021 | September 05, 2021 |

END OF TEST REPORT