

# TEST REPORT

Product Name : 12inch PORTABEL ABS SPEAKER  
Model Number : BP20-12A, K-PRO12  
FCC ID : 2AXAO-K-PRO12

Prepared for : NINGBO RIXING ELECTRONICS CO., LTD.  
Address : No.495, Shidai Road, Wuxiang Town, Ningbo, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ES200707030W  
Date(s) of Tests : July 07, 2020 to September 16, 2020  
Date of issue : September 17, 2020

## Table of Contents

<b>1 TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2 EUT TECHNICAL DESCRIPTION .....</b>	<b>4</b>
<b>3 SUMMARY OF TEST RESULT .....</b>	<b>5</b>
<b>4 TEST METHODOLOGY .....</b>	<b>6</b>
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
4.2 MEASUREMENT EQUIPMENT USED.....	6
4.3 DESCRIPTION OF TEST MODES .....	7
<b>5 FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1 FACILITIES.....	8
5.2 LABORATORY ACCREDITATIONS AND LISTINGS.....	8
<b>6 TEST SYSTEM UNCERTAINTY .....</b>	<b>8</b>
<b>7 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>9</b>
7.1 RADIO FREQUENCY TEST SETUP 1 .....	9
7.2 RADIO FREQUENCY TEST SETUP 2 .....	9
7.3 CONDUCTED EMISSION TEST SETUP .....	10
7.4 SUPPORT EQUIPMENT .....	11
<b>8 FREQUENCY HOPPING SYSTEM REQUIREMENTS.....</b>	<b>12</b>
8.1 STANDARD APPLICABLE .....	12
8.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	12
8.3 EQUAL HOPPING FREQUENCY USE .....	13
8.4 FREQUENCY HOPPING SYSTEM .....	13
<b>9 TEST REQUIREMENTS .....</b>	<b>14</b>
9.1 20DB BANDWIDTH .....	14
9.2 CARRIER FREQUENCY SEPARATION .....	20
9.3 NUMBER OF HOPPING FREQUENCIES .....	26
9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME).....	28
9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	31
9.6 CONDUCTED SPURIOUS EMISSION .....	37
9.7 RADIATED SPURIOUS EMISSION.....	44
9.8 CONDUCTED EMISSION TEST .....	57
9.9 ANTENNA APPLICATION .....	60

## 1 TEST RESULT CERTIFICATION

Applicant : NINGBO RIXING ELECTRONICS CO., LTD.  
 Address : No.495, Shidai Road, Wuxiang Town, Ningbo, China  
 Manufacturer : NINGBO RIXING ELECTRONICS CO., LTD.  
 Address : No.495, Shidai Road, Wuxiang Town, Ningbo, China  
 EUT : 12inch PORTABEL ABS SPEAKER  
 Model Name : BP20-12A, K-PRO12  
 Trademark : BLG, KONEX

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2018, Subpart J	
FCC 47 CFR Part 15 2018, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 07, 2020 to September 16, 2020

Prepared by : Sewen Guo /Editor  


Reviewer : Joe Xia/Editor  
  


Approve & Authorized Signer : Lisa Wang/Manager  


## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Product Name</b>	12inch PORTABEL ABS SPEAKER
<b>Model number</b>	BP20-12A, K-PRO12 (Note:Two models are the same except the model name. We prepared model BP20-12A for EMC test.)
<b>Sample number</b>	1#
<b>Device Type</b>	Bluetooth V5.0
<b>Data Rate</b>	1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation
<b>Modulation</b>	GFSK pi/4-DQPSK 8DPSK
<b>Operating Frequency Range</b>	2402-2480MHz
<b>Number of Channels</b>	79 channels
<b>Max Transmit Power</b>	1.958dBm
<b>Antenna Type</b>	PCB Antenna
<b>Gain</b>	0.58 dBi
<b>Power supply</b>	AC 100~240V, 50/60Hz
<b>Temperature Range</b>	-10°C to +40°C

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(1)	20 dB Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	PASS	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d)	Radiated Spurious Emissions	PASS	
15.209			
15.207	Conducted Emission	PASS	
15.203	Antenna Application	PASS	
NOTE1:N/A (Not Applicable)			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AXAO-K-PRO12 filing to comply with Section 15.247 of the FCC Part 15, Subpart C.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

558074 D01 15.247 Meas Guidance V05r02

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 18, 2020	May 17, 2021
Pre-Amplifier	HP	8447F	2944A07999	May 17, 2020	May 16, 2021
Bilog Antenna	Schwarzbeck	VULB9163	142	May 17, 2020	May 16, 2021
Loop Antenna	ARA	PLA-1030/B	1029	May 17, 2020	May 16, 2021
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 18, 2020	May 17, 2021
Cable	Schwarzbeck	AK9513	ACRX1	May 18, 2020	May 17, 2021
Cable	Rosenberger	N/A	FP2RX2	May 18, 2020	May 17, 2021
Cable	Schwarzbeck	AK9513	CRPX1	May 18, 2020	May 17, 2021
Cable	Schwarzbeck	AK9513	CRRX2	May 18, 2020	May 17, 2021

#### 4.2.2 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 18, 2020	May 17, 2021

#### 4.2.3 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 18, 2020	May 17, 2021
L.I.S.N.	Schwarzbeck	NNLK8129	8129-203	May 18, 2020	May 17, 2021
50Ω Coaxial Switch	Anritsu	MP59B	M20531	May 18, 2020	May 17, 2021

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth GFSK modulation; 2Mbps for Bluetooth pi/4-DQPSK modulation; 3Mbps for Bluetooth 8DPSK) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V5.0

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480

Note:  $fc = 2402\text{MHz} + (k-1) \times 1\text{MHz}$  k=1 to 79

Test Frequency and Channel for Bluetooth V5.0

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 32.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab. : Accredited by CNAS, 2018.11.30  
 The certificate is valid until 2022.10.28  
 The Laboratory has been assessed and proved to be in compliance with  
 CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)  
 The Certificate Registration Number is L2291.

Accredited by FCC  
 Designation Number: CN1204  
 Test Firm Registration Number: 882943

Accredited by A2LA, August 25, 2020  
 The Certificate Number is 4321.01.  
 Accredited by Industry Canada  
 The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.  
 Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
 Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

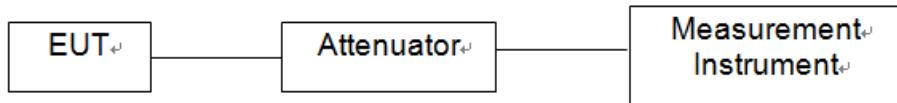

### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

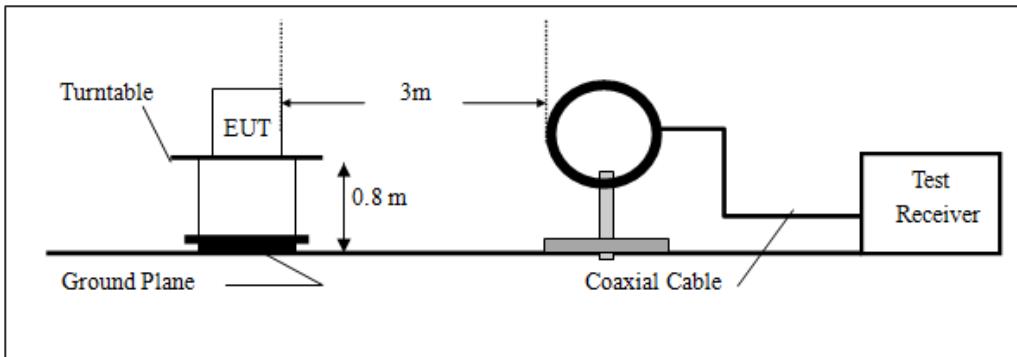

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

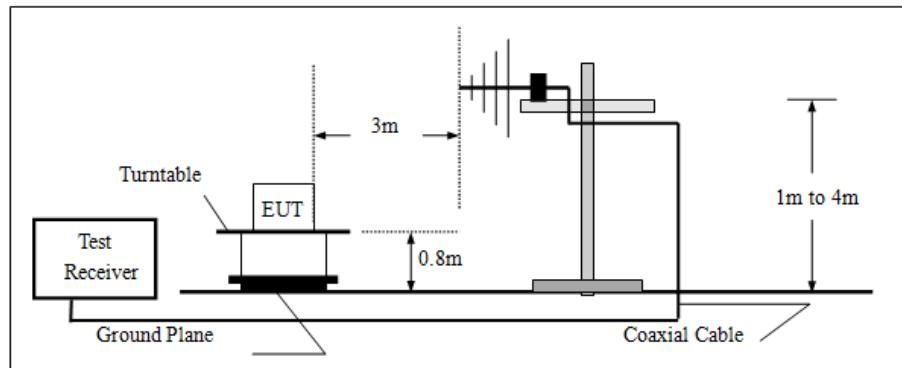

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

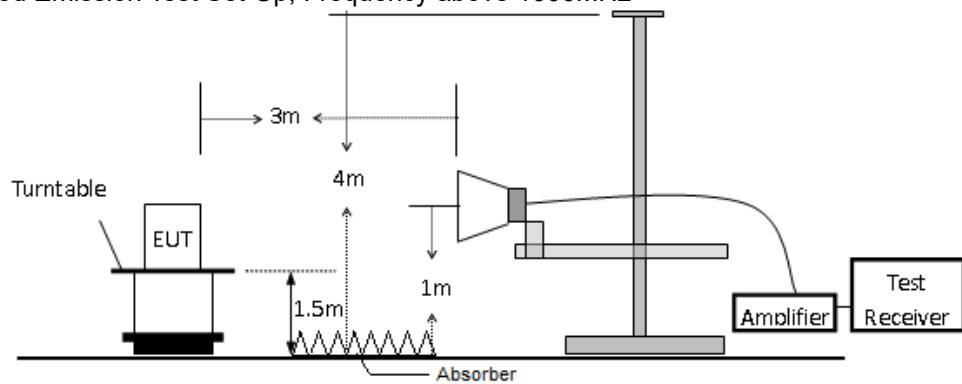


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Game fitness board) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

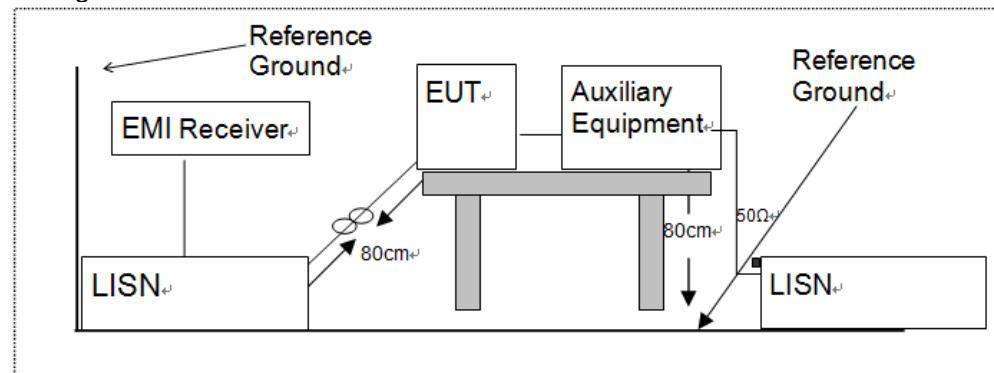

#### 7.4 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

### 8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels.

The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 524$  bits

Longest sequence of zeros: 8 (non-inverted signal)

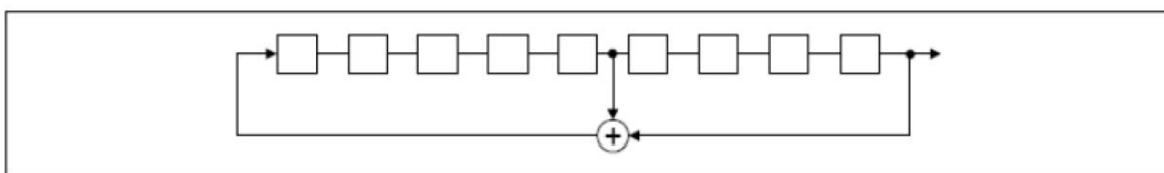

*Linear Feedback Shift Register for Generation of the PRBS sequence*

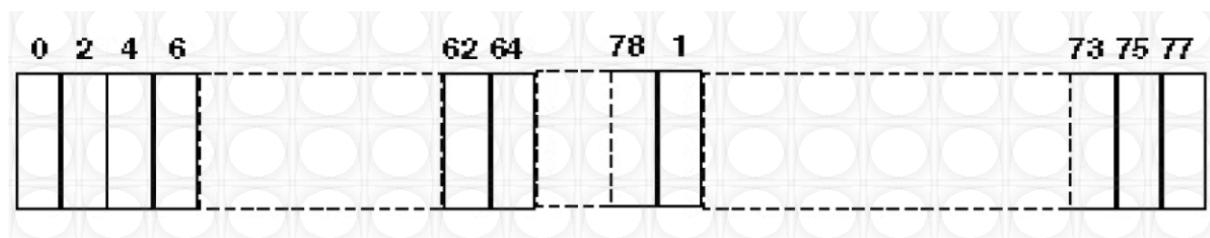

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

### 8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

## 9 TEST REQUIREMENTS

### 9.1 20DB BANDWIDTH

#### 9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

#### 9.1.2 Conformance Limit

No limit requirement.

#### 9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.1.4 Test Procedure

The EUT was operating in Bluetooth V5.0 and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdeltafunction, and move the marker to the other side of the emission, until it is (asclose as possible to) even with the reference marker level. The marker-delta reading atthis point is the 20 dB bandwidth of the emission.


If this value varies with differentmodes of operation (e.g., data rate, modulation format, etc.), repeat this test for eachvariation.



Measure and record the results in the test report.


### Test Results



Temperature:	25°C	Test Date:	August 12, 2020
Humidity:	45%	Test By:	XW


Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Bandwidth (kHz)
GFSK	0	2402	884.340
	39	2441	946.245
	78	2480	947.437
pi/4-DQPSK	0	2402	1317.000
	39	2441	1367.000
	78	2480	1397.000
8DPSK	0	2402	1266.000
	39	2441	1320.000
	78	2480	1376.000

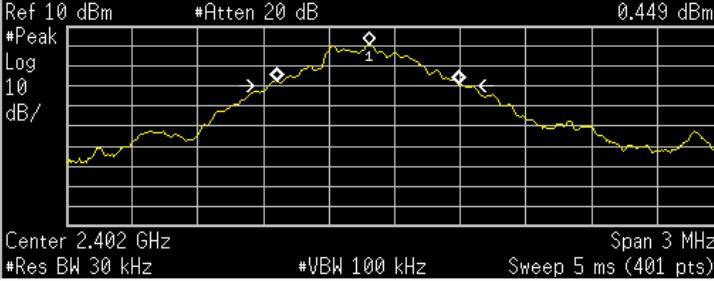Test Model	20dB Bandwidth	
	Channel 0: 2402MHz	GFSK Modulation
	<b>Agilent</b> Ch Freq 2.402 GHz Trig Free Occupied Bandwidth <b>Center 2.402000000 GHz</b>  Ref 10 dBm *Atten 20 dB Mkr1 2.4018800 GHz 0.449 dBm *Peak Log 10 dB/ Center 2.402 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts) <b>Occupied Bandwidth</b> 836.7476 kHz <b>Occ BW % Pwr</b> 99.00 % <b>x dB Bandwidth</b> 884.340 kHz <b>x dB</b> -20.00 dB <b>Transmit Freq Error</b> -124.181 kHz	<b>Freq/Channel</b> <b>Center Freq</b> 2.402000000 GHz <b>Start Freq</b> 2.400500000 GHz <b>Stop Freq</b> 2.403500000 GHz <b>CF Step</b> 300.0000000 kHz Auto Man <b>Freq Offset</b> 0.000000000 Hz <b>Signal Track</b> On Off <b>Scale Type</b> Log Lin
	20dB Bandwidth	
	Channel 39: 2441MHz	GFSK Modulation
	<b>Agilent</b> Ch Freq 2.441 GHz Trig Free Occupied Bandwidth <b>Center 2.441000000 GHz</b>  Ref 10 dBm *Atten 20 dB Mkr1 2.4407150 GHz 0.825 dBm *Peak Log 10 dB/ Center 2.441 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts) <b>Occupied Bandwidth</b> 855.7451 kHz <b>Occ BW % Pwr</b> 99.00 % <b>x dB Bandwidth</b> 946.245 kHz <b>x dB</b> -20.00 dB <b>Transmit Freq Error</b> -126.554 kHz	<b>Freq/Channel</b> <b>Center Freq</b> 2.441000000 GHz <b>Start Freq</b> 2.439500000 GHz <b>Stop Freq</b> 2.442500000 GHz <b>CF Step</b> 300.0000000 kHz Auto Man <b>Freq Offset</b> 0.000000000 Hz <b>Signal Track</b> On Off <b>Scale Type</b> Log Lin

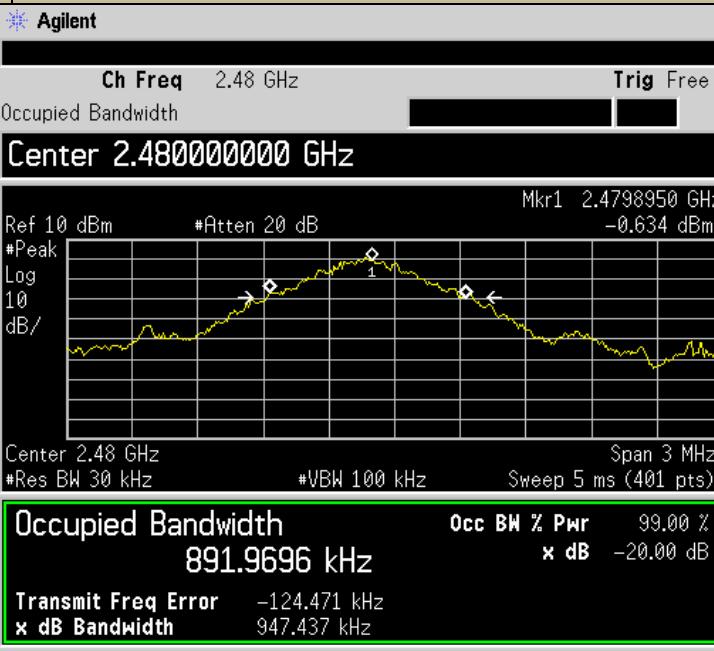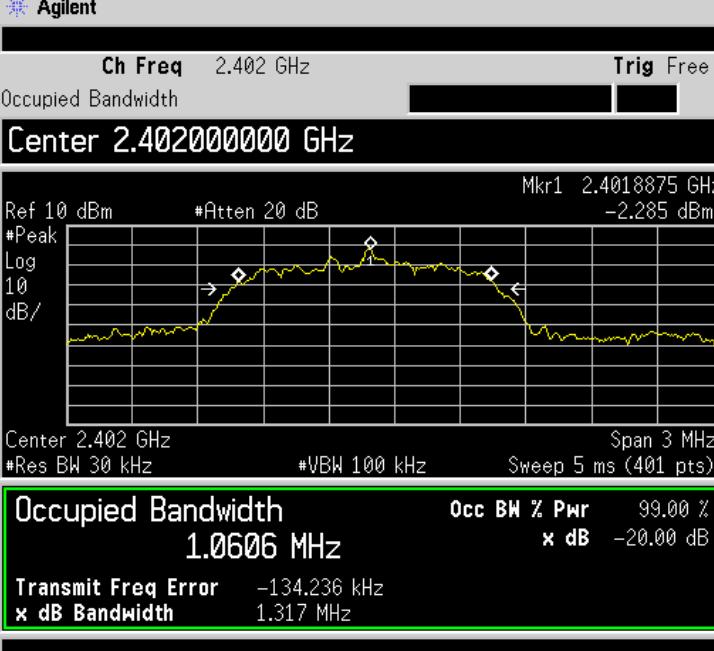Test Model	20dB Bandwidth	
	Channel 78: 2480MHz	GFSK Modulation
	 <p>Agilent</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.480000000 GHz</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4798950 GHz -0.634 dBm</p> <p>*Peak Log 10 dB/</p> <p>Center 2.48 GHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 891.9696 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -124.471 kHz x dB Bandwidth 947.437 kHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.48000000 GHz</p> <p><b>Start Freq</b> 2.47850000 GHz</p> <p><b>Stop Freq</b> 2.48150000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>
	20dB Bandwidth	
	Channel 0: 2402MHz	pi/4-DQPSK Modulation
	 <p>Agilent</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.402000000 GHz</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 2.4018875 GHz -2.285 dBm</p> <p>*Peak Log 10 dB/</p> <p>Center 2.402 GHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.0606 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -134.236 kHz x dB Bandwidth 1.317 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40050000 GHz</p> <p><b>Stop Freq</b> 2.40350000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>

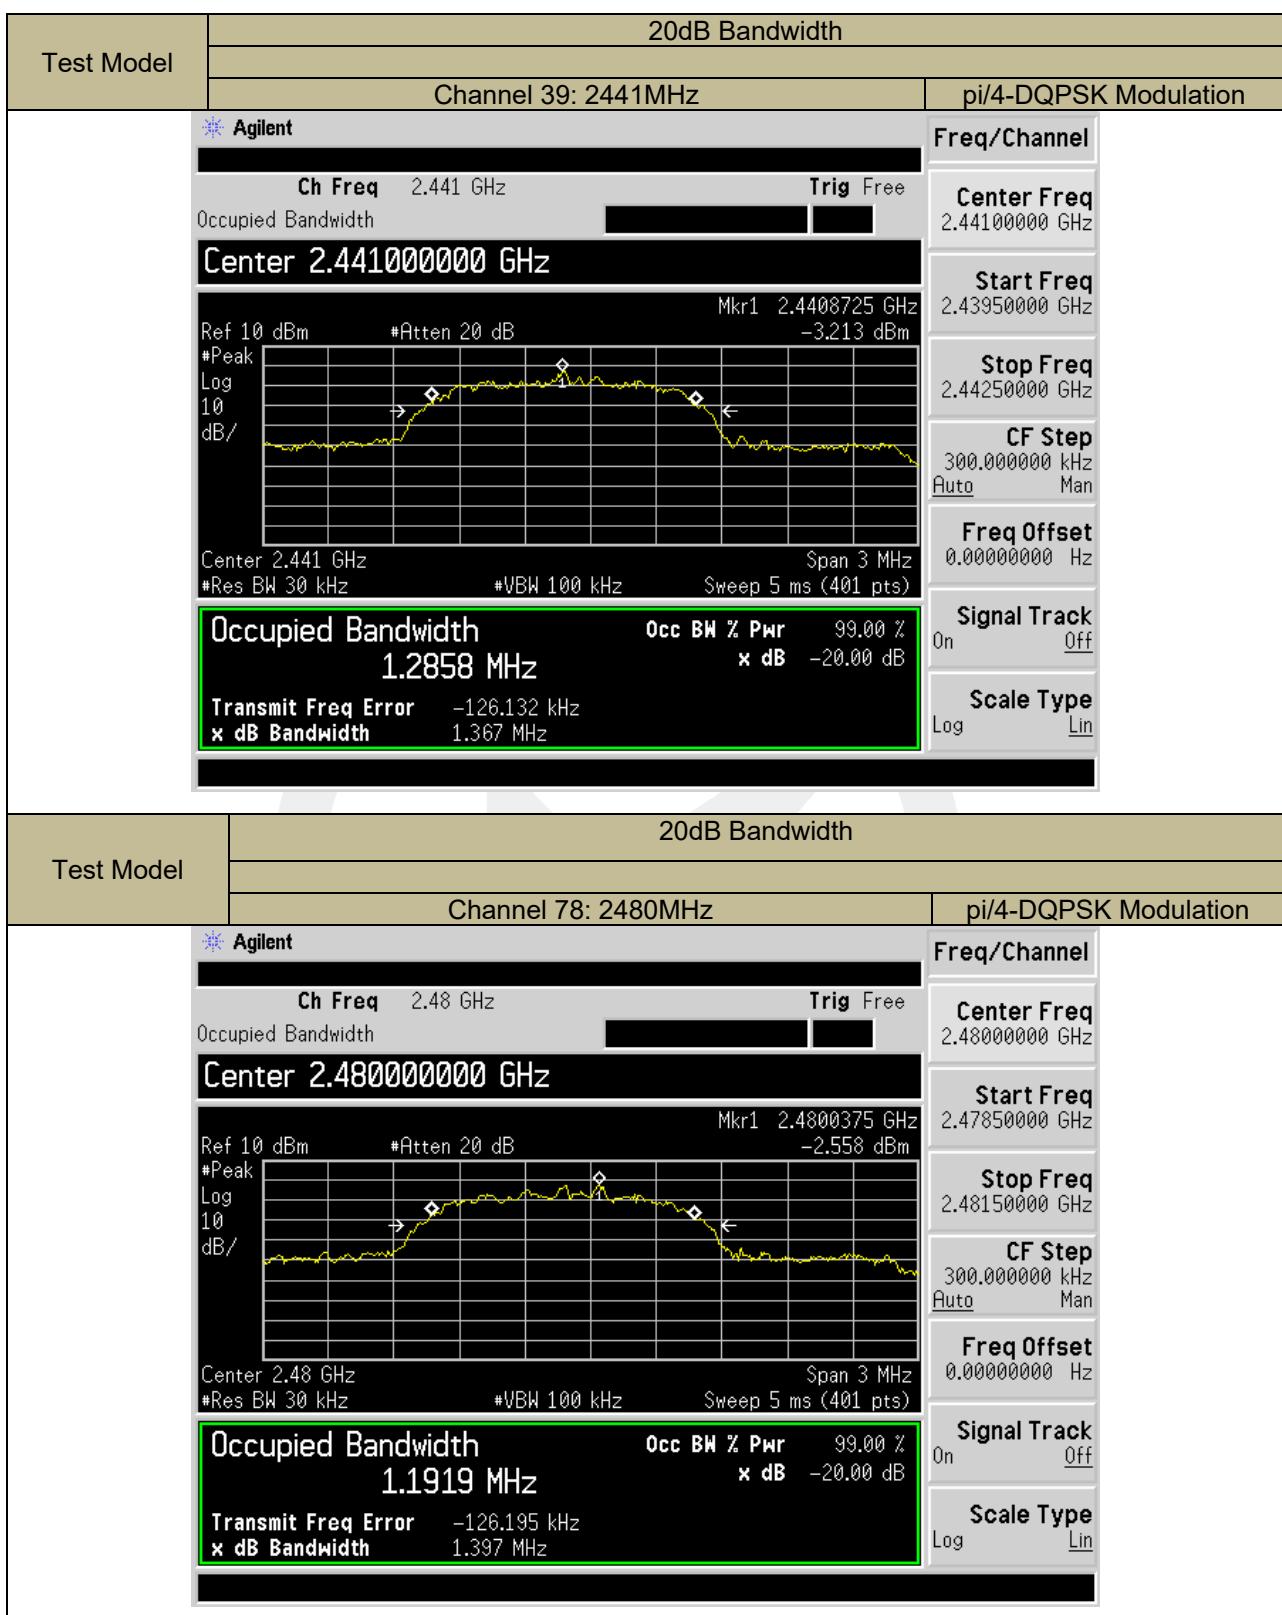

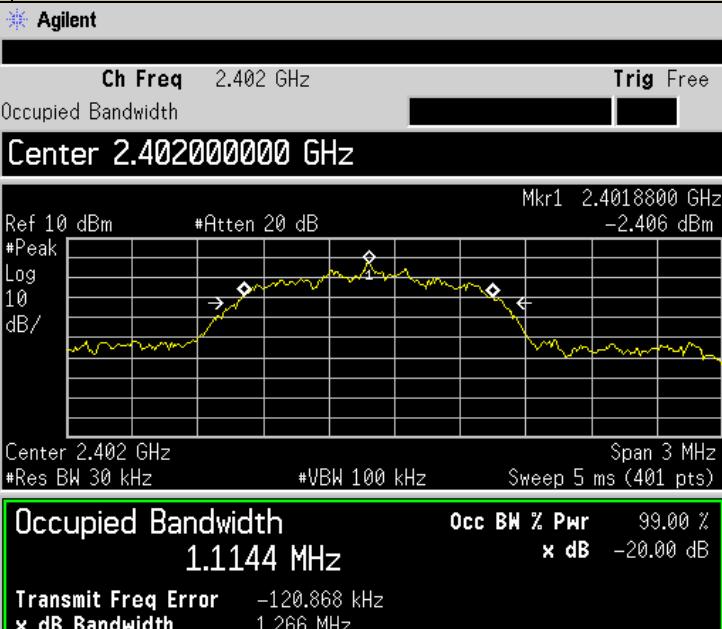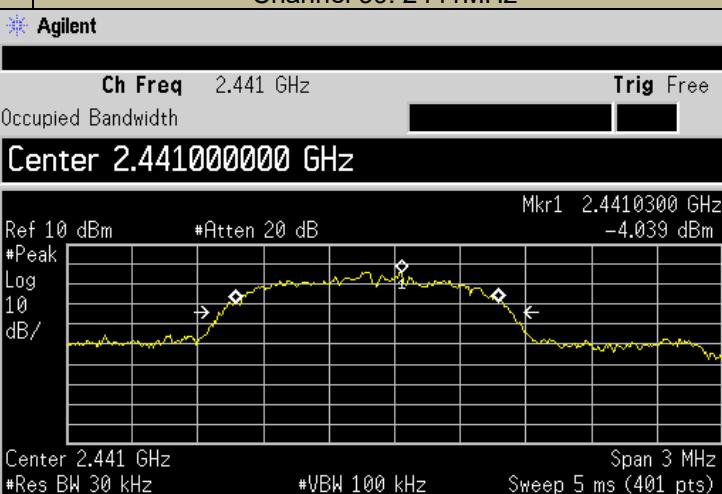Test Model	20dB Bandwidth	
	Channel 0: 2402MHz	8DPSK Modulation
	<b>Agilent</b>  <div style="border: 1px solid green; padding: 5px; display: inline-block;"> <b>Occupied Bandwidth</b> 1.1144 MHz  <b>Transmit Freq Error</b> -120.868 kHz  <b>x dB Bandwidth</b> 1.266 MHz         </div>	<b>Freq/Channel</b> <b>Center Freq</b> 2.40200000 GHz <b>Start Freq</b> 2.40050000 GHz <b>Stop Freq</b> 2.40350000 GHz <b>CF Step</b> 300.000000 kHz <b>Freq Offset</b> 0.00000000 Hz <b>Signal Track</b> Off <b>Scale Type</b> Lin
	20dB Bandwidth	
	Channel 39: 2441MHz	8DPSK Modulation
	<b>Agilent</b>  <div style="border: 1px solid green; padding: 5px; display: inline-block;"> <b>Occupied Bandwidth</b> 1.2343 MHz  <b>Transmit Freq Error</b> -129.006 kHz  <b>x dB Bandwidth</b> 1.320 MHz         </div>	<b>Freq/Channel</b> <b>Center Freq</b> 2.44100000 GHz <b>Start Freq</b> 2.43950000 GHz <b>Stop Freq</b> 2.44250000 GHz <b>CF Step</b> 300.000000 kHz <b>Freq Offset</b> 0.00000000 Hz <b>Signal Track</b> Off <b>Scale Type</b> Lin

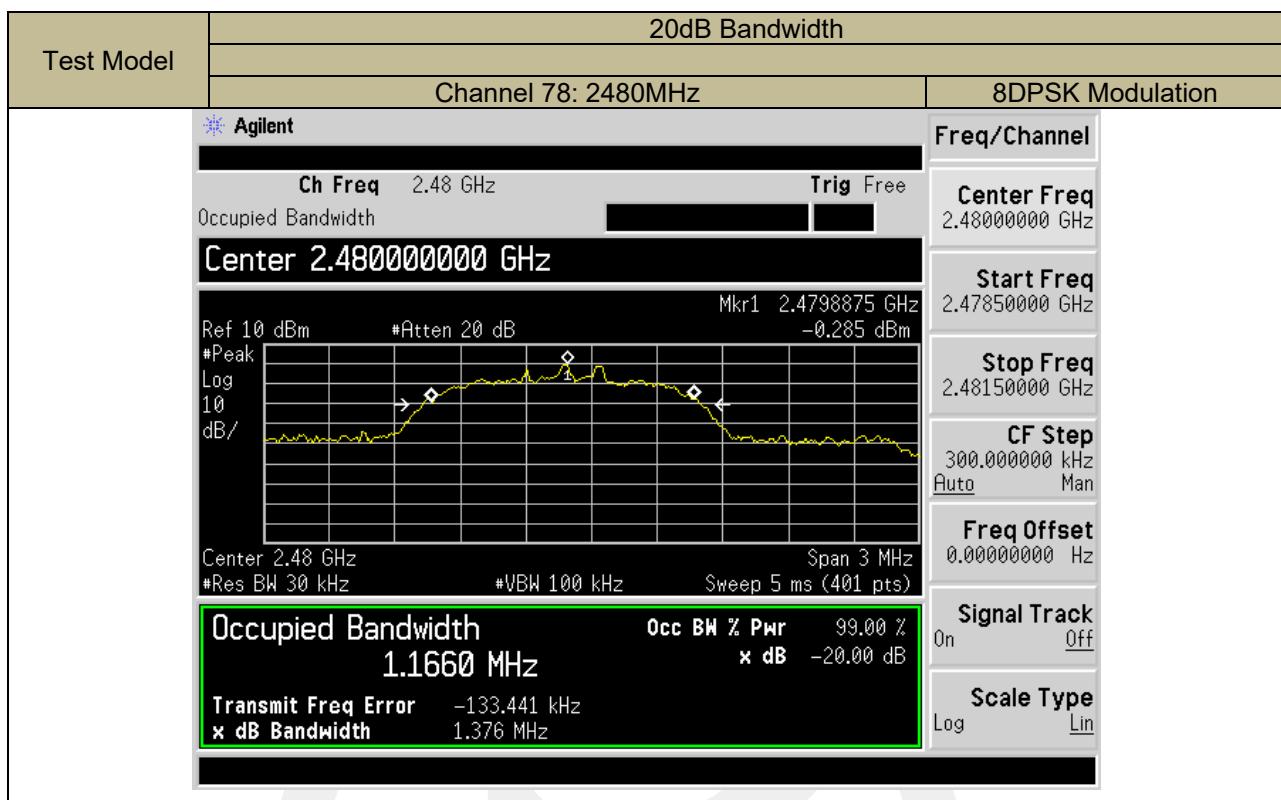

## 9.2 CARRIER FREQUENCY SEPARATION

### 9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

### 9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.2.4 Test Procedure

■ According to FCC Part 15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Set the RBW = 100kHz. Set VBW = 300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

## Test Results

Temperature:

25°C

Humidity:

45%

Test Date:



August 12, 2020



Test By:


XW


Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
GFSK	0	2402	1098.0	>589.56	PASS
	39	2441	1012.0	>630.83	PASS
	78	2480	1015.0	>631.62	PASS
pi/4-DQPSK	0	2402	1052.0	>878.00	PASS
	39	2441	1018.0	>911.33	PASS
	78	2480	1055.0	>931.33	PASS
8DPSK	0	2402	1032.0	>844.00	PASS
	39	2441	1088.0	>880.00	PASS
	78	2480	1021.0	>917.33	PASS


Note: Limit = 20dB bandwidth \* 2/3, if it is greater than 25kHz and the output power is less than 125mW (21dBm).

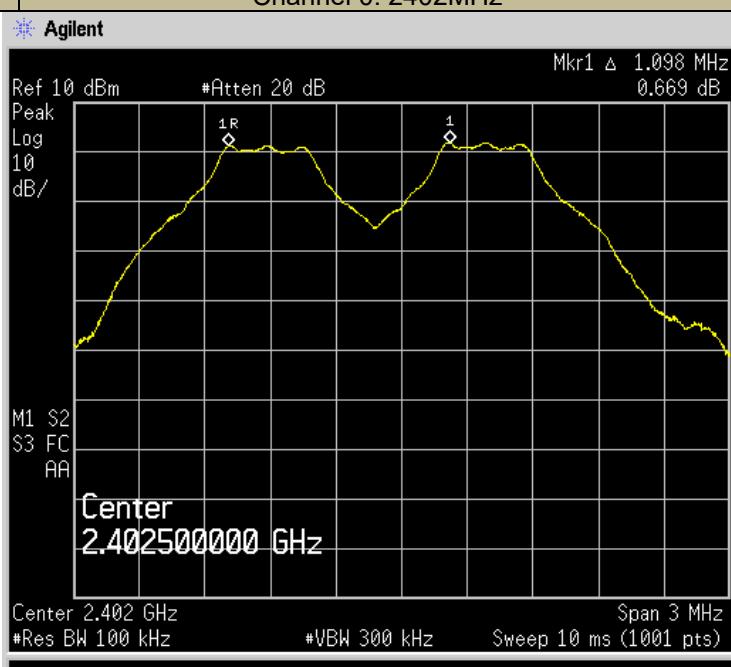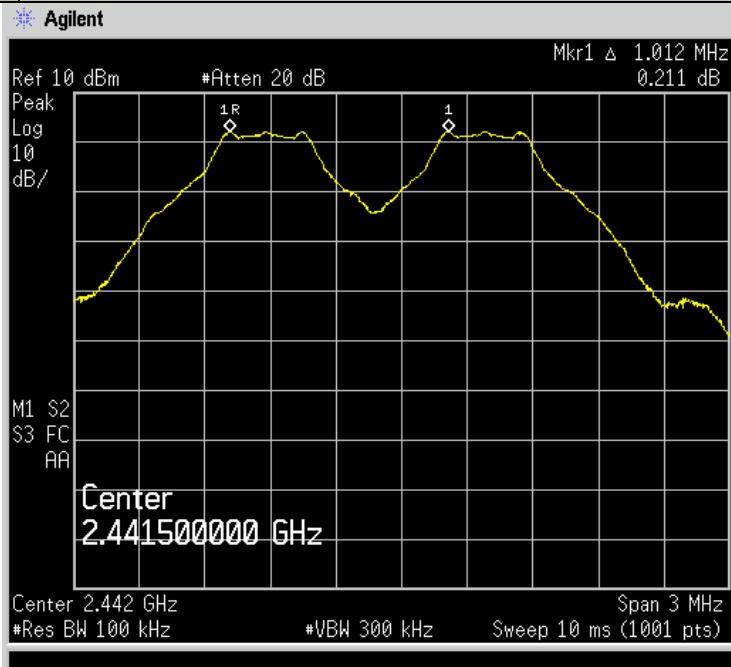Test Model	Carrier Frequency Separation		GFSK Modulation	
	Channel 0: 2402MHz			
	 <p>Agilent</p> <p>Ref 10 dBm      #Atten 20 dB      Mkr1 <math>\Delta</math> 1,098 MHz Peak Log 0.669 dB</p> <p>1R      1</p> <p>10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz      #Res BW 100 kHz      #VBW 300 kHz      Span 3 MHz      Sweep 10 ms (1001 pts)</p>	<b>Freq/Channel</b> <b>Center Freq</b> <b>Start Freq</b> <b>Stop Freq</b> <b>CF Step</b> <b>Freq Offset</b> <b>Signal Track</b> <b>Scale Type</b>		
	 <p>Agilent</p> <p>Ref 10 dBm      #Atten 20 dB      Mkr1 <math>\Delta</math> 1,012 MHz Peak Log 0.211 dB</p> <p>1R      1</p> <p>10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.4415 GHz      #Res BW 100 kHz      #VBW 300 kHz      Span 3 MHz      Sweep 10 ms (1001 pts)</p>	<b>Freq/Channel</b> <b>Center Freq</b> <b>Start Freq</b> <b>Stop Freq</b> <b>CF Step</b> <b>Freq Offset</b> <b>Signal Track</b> <b>Scale Type</b>		

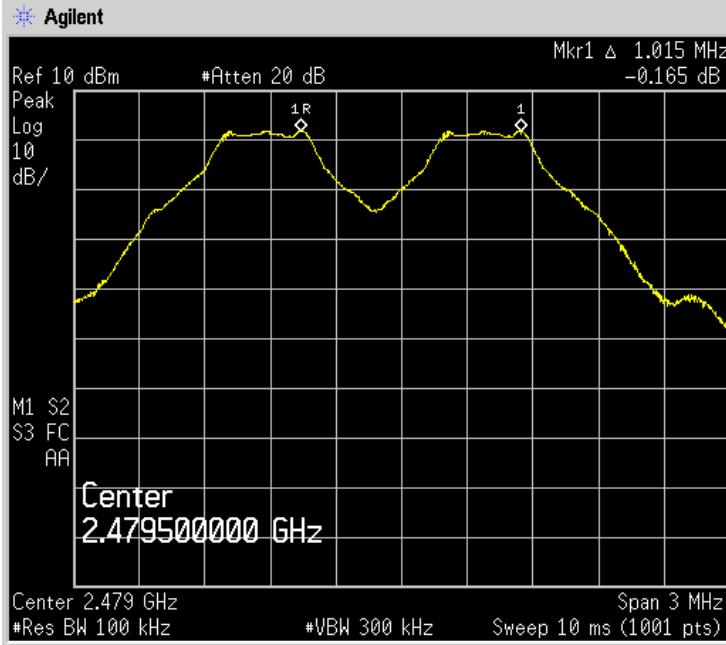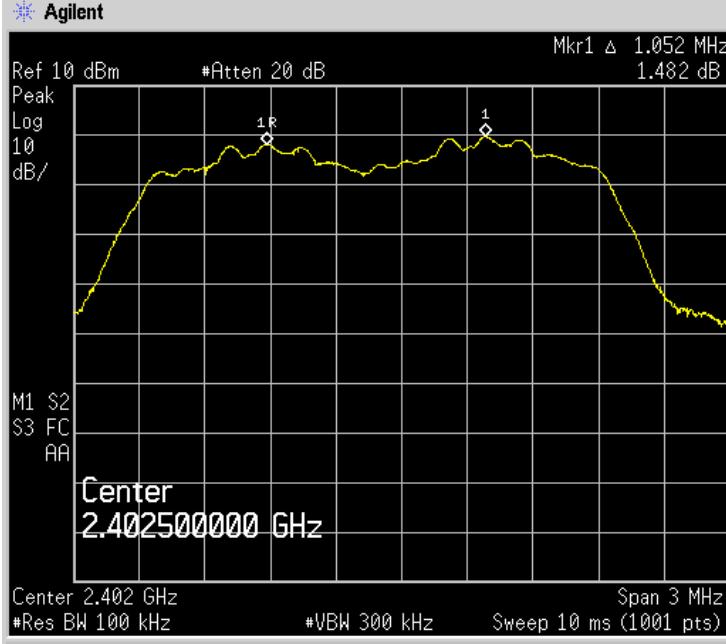Test Model	Carrier Frequency Separation	
	Channel 78: 2480MHz	
	GFSK Modulation	
	 <p>Agilent Spectrum Analyzer Plot for Channel 78. The plot shows a GFSK modulated signal with two peaks. The left peak is labeled '1R' and the right peak is labeled '1'. The plot includes the following parameters:</p> <ul style="list-style-type: none"> <li>Ref 10 dBm</li> <li>#Atten 20 dB</li> <li>Mkr1 <math>\Delta</math> 1.015 MHz</li> <li>-0.165 dB</li> <li>Peak Log 10 dB/</li> <li>10 dB/</li> <li>M1 S2 S3 FC AA</li> <li>Center 2.479500000 GHz</li> <li>Center 2.479 GHz</li> <li>#Res BW 100 kHz</li> <li>#VBW 300 kHz</li> <li>Span 3 MHz</li> <li>Sweep 10 ms (1001 pts)</li> </ul>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.479500000 GHz</p> <p><b>Start Freq</b> 2.478000000 GHz</p> <p><b>Stop Freq</b> 2.481000000 GHz</p> <p><b>CF Step</b> 300.0000000 kHz</p> <p><b>Auto</b> <input checked="" type="checkbox"/> <b>Man</b> <input type="checkbox"/></p> <p><b>Freq Offset</b> 0.000000000 Hz</p> <p><b>Signal Track</b> <b>On</b> <input checked="" type="checkbox"/> <b>Off</b> <input type="checkbox"/></p> <p><b>Scale Type</b> <b>Log</b> <input type="checkbox"/> <b>Lin</b> <input checked="" type="checkbox"/></p>
	 <p>Agilent Spectrum Analyzer Plot for Channel 0. The plot shows a pi/4-DQPSK modulated signal with two peaks. The left peak is labeled '1R' and the right peak is labeled '1'. The plot includes the following parameters:</p> <ul style="list-style-type: none"> <li>Ref 10 dBm</li> <li>#Atten 20 dB</li> <li>Mkr1 <math>\Delta</math> 1.052 MHz</li> <li>1.482 dB</li> <li>Peak Log 10 dB/</li> <li>10 dB/</li> <li>M1 S2 S3 FC AA</li> <li>Center 2.402500000 GHz</li> <li>Center 2.402 GHz</li> <li>#Res BW 100 kHz</li> <li>#VBW 300 kHz</li> <li>Span 3 MHz</li> <li>Sweep 10 ms (1001 pts)</li> </ul>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.402500000 GHz</p> <p><b>Start Freq</b> 2.401000000 GHz</p> <p><b>Stop Freq</b> 2.404000000 GHz</p> <p><b>CF Step</b> 300.0000000 kHz</p> <p><b>Auto</b> <input checked="" type="checkbox"/> <b>Man</b> <input type="checkbox"/></p> <p><b>Freq Offset</b> 0.000000000 Hz</p> <p><b>Signal Track</b> <b>On</b> <input checked="" type="checkbox"/> <b>Off</b> <input type="checkbox"/></p> <p><b>Scale Type</b> <b>Log</b> <input type="checkbox"/> <b>Lin</b> <input checked="" type="checkbox"/></p>

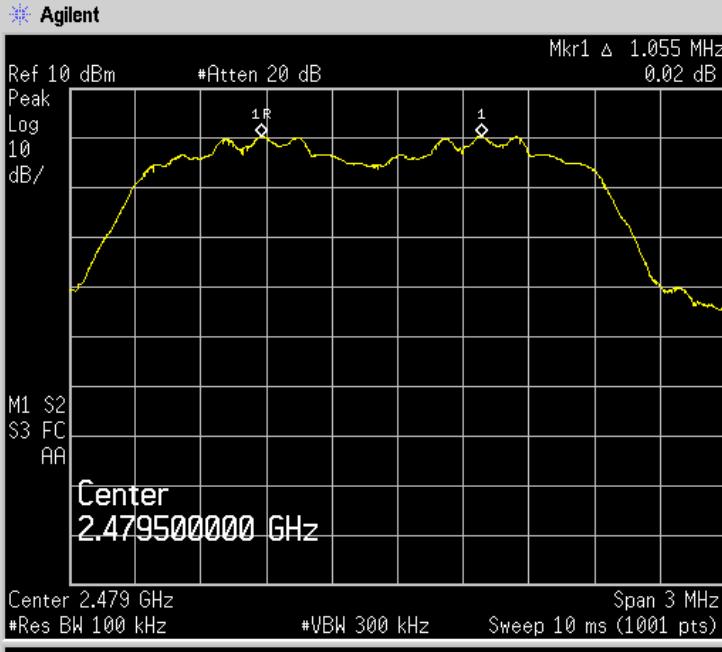Test Model	Carrier Frequency Separation	
	Channel 39: 2441MHz	
	pi/4-DQPSK Modulation	
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 39. The plot shows a signal with two markers: Mkr1 at 2.441500000 GHz and Mkr2 at 2.443000000 GHz. The center frequency is 2.441500000 GHz. The plot includes labels for Ref 10 dBm, #Atten 20 dB, Mkr1 Δ 1.018 MHz, -0.118 dB, M1 S2 S3 FC AA, and Center 2.441500000 GHz. The x-axis is labeled Center 2.442 GHz, #Res BW 100 kHz, and Sweep 10 ms (1001 pts). The y-axis is labeled Peak Log 10 dB/.</p>	<b>Freq/Channel</b> <b>Center Freq</b> 2.44150000 GHz <b>Start Freq</b> 2.44000000 GHz <b>Stop Freq</b> 2.44300000 GHz <b>CF Step</b> 300.000000 kHz Auto Man <b>Freq Offset</b> 0.00000000 Hz <b>Signal Track</b> On Off <b>Scale Type</b> Log Lin
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 78. The plot shows a signal with two markers: Mkr1 at 2.479500000 GHz and Mkr2 at 2.481000000 GHz. The center frequency is 2.479500000 GHz. The plot includes labels for Ref 10 dBm, #Atten 20 dB, Mkr1 Δ 1.055 MHz, 0.02 dB, M1 S2 S3 FC AA, and Center 2.479500000 GHz. The x-axis is labeled Center 2.479 GHz, #Res BW 100 kHz, and Sweep 10 ms (1001 pts). The y-axis is labeled Peak Log 10 dB/.</p>	<b>Freq/Channel</b> <b>Center Freq</b> 2.47950000 GHz <b>Start Freq</b> 2.47800000 GHz <b>Stop Freq</b> 2.48100000 GHz <b>CF Step</b> 300.000000 kHz Auto Man <b>Freq Offset</b> 0.00000000 Hz <b>Signal Track</b> On Off <b>Scale Type</b> Log Lin

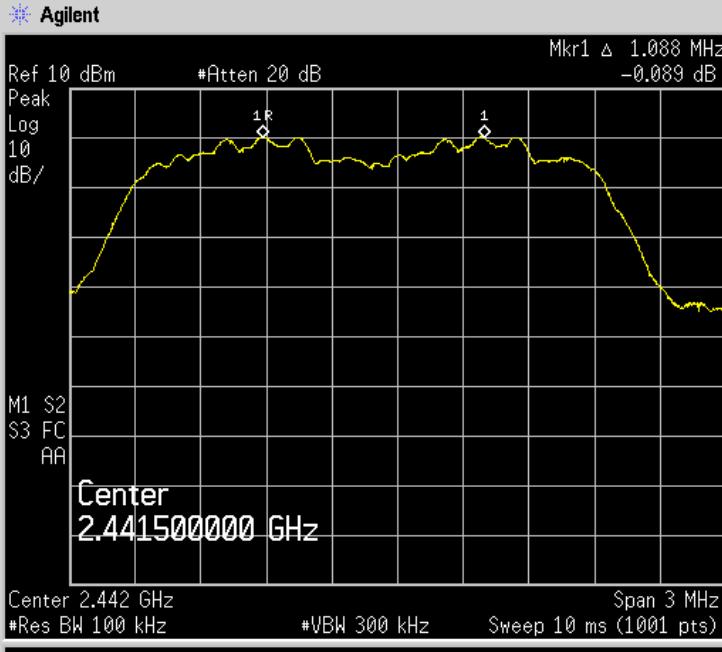Test Model	Carrier Frequency Separation	
	Channel 0: 2402MHz	
	8DPSK Modulation	
	 <p>Agilent Spectrum Analyzer Plot for Channel 0. The plot shows a signal centered at 2.402500000 GHz with a span of 3 MHz. The plot includes markers for M1, S2, S3, FC, and AA. The center frequency is explicitly labeled as 2.402500000 GHz.</p> <p>Agilent</p> <p>Ref 10 dBm      #Atten 20 dB      Mkr1 <math>\Delta</math> 1.032 MHz      1.423 dB</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402500000 GHz</p> <p>Center 2.402 GHz      #Res BW 100 kHz      #VBW 300 kHz      Sweep 10 ms (1001 pts)      Span 3 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40250000 GHz</p> <p><b>Start Freq</b> 2.40100000 GHz</p> <p><b>Stop Freq</b> 2.40400000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>
	 <p>Agilent Spectrum Analyzer Plot for Channel 39. The plot shows a signal centered at 2.441500000 GHz with a span of 3 MHz. The plot includes markers for M1, S2, S3, FC, and AA. The center frequency is explicitly labeled as 2.441500000 GHz.</p> <p>Agilent</p> <p>Ref 10 dBm      #Atten 20 dB      Mkr1 <math>\Delta</math> 1.088 MHz      -0.089 dB</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.441500000 GHz</p> <p>Center 2.442 GHz      #Res BW 100 kHz      #VBW 300 kHz      Sweep 10 ms (1001 pts)      Span 3 MHz</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.44150000 GHz</p> <p><b>Start Freq</b> 2.44000000 GHz</p> <p><b>Stop Freq</b> 2.44300000 GHz</p> <p><b>CF Step</b> 300.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>

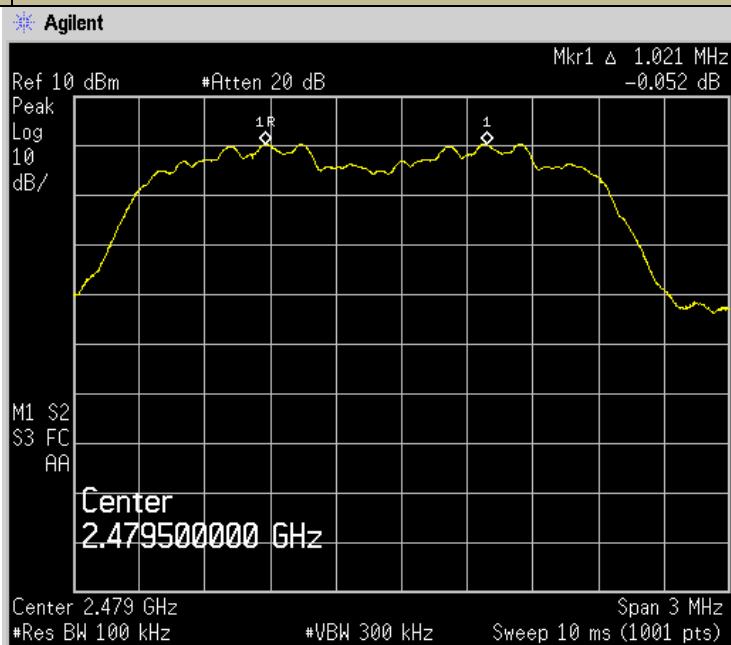Test Model	Carrier Frequency Separation	
	Channel 78: 2480MHz	
	8DPSK Modulation	
	 <p>The screenshot shows a spectrum analysis plot with a yellow line representing the signal. The plot includes markers for '1R' and '1'. Text on the screen includes:</p> <ul style="list-style-type: none"> <li>Ref 10 dBm</li> <li>#Atten 20 dB</li> <li>Mkr1 <math>\Delta</math> 1.021 MHz</li> <li>-0.052 dB</li> <li>Peak Log 10 dB/</li> <li>M1 S2 S3 FC AA</li> <li>Center 2.479500000 GHz</li> <li>Center 2.479 GHz</li> <li>#Res BW 100 kHz</li> <li>#VBW 300 kHz</li> <li>Span 3 MHz</li> <li>Sweep 10 ms (1001 pts)</li> </ul>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.479500000 GHz</p> <p><b>Start Freq</b> 2.478000000 GHz</p> <p><b>Stop Freq</b> 2.481000000 GHz</p> <p><b>CF Step</b> 300.0000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.000000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>

### 9.3 NUMBER OF HOPPING FREQUENCIES

#### 9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and 558074 D01 15.247 Meas Guidance V05r02

#### 9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

#### 9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 9.3.4 Test Procedure

- According to FCC Part 15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.


#### Test Results

Temperature: 25°C  
Humidity: 45 %

Test Date: August 12, 2020  
Test By: XW

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480 (GFSK)	79	>15

Note: Both BR & EDR mode has same result.

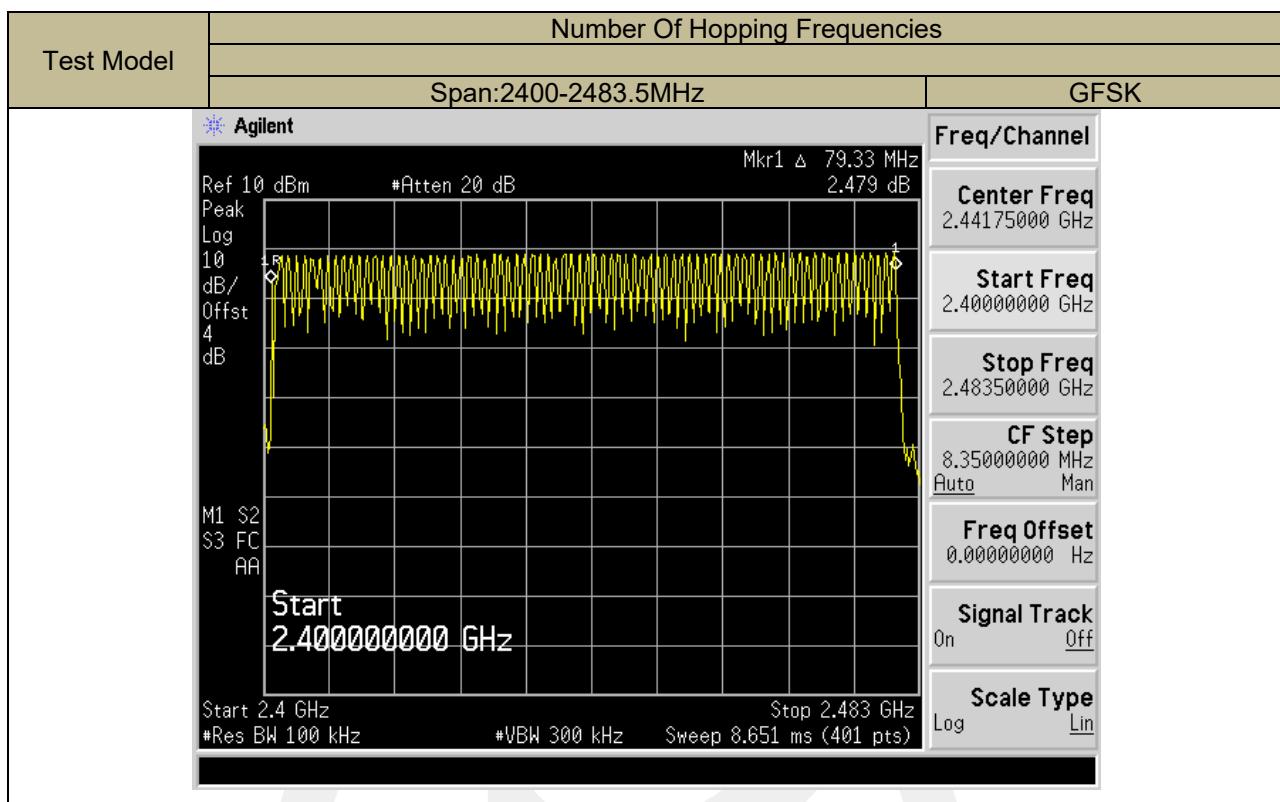

## 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

### 9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and 558074 D01 15.247 Meas Guidance V05r02

### 9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

### 9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.4.4 Test Procedure

- According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

### 9.4.5 Test Results

Temperature: 25°C  
Humidity: 45 %

Test Date: August 12, 2020  
Test By: XW



Modulation Mode	Channel Number	Packet type	Pluse width (ms)	DwellTime (ms)	Limit (ms)	Verdict
GFSK	0	DH1	0.41	131.20	<400	PASS
	0	DH3	1.68	268.80	<400	PASS
	0	DH5	2.84	302.93	<400	PASS


Note1: DwellTime(DH1)=PW\*(1600/2/79)\*31.6

DwellTime(DH3)=PW\*(1600/4/79)\*31.6

DwellTime(DH5)=PW\*(1600/6/79)\*31.6

Note2: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK)mode have been tested, and the worst results has been recorded on the follow page.

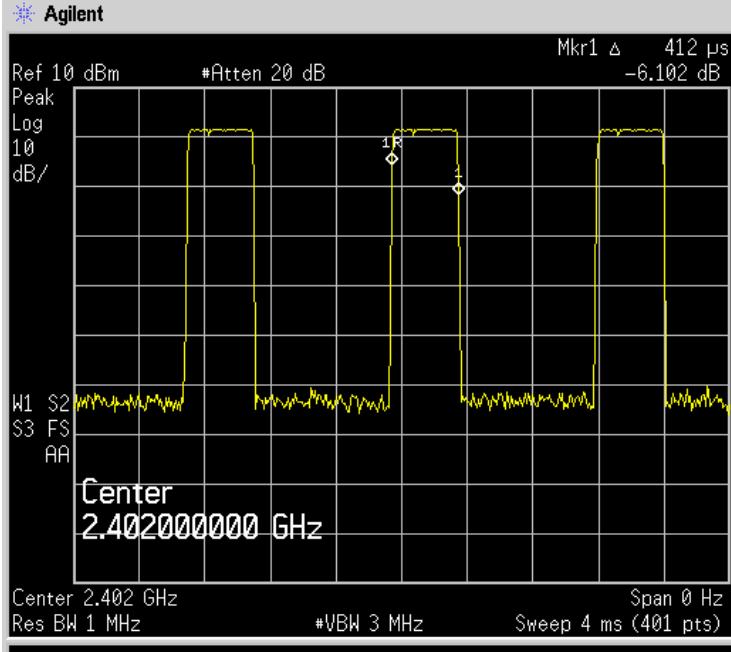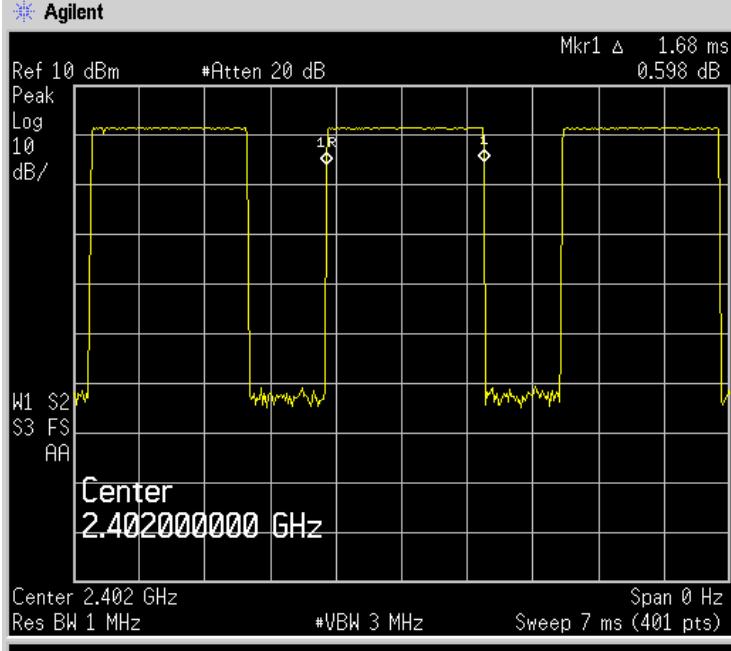Test Model	Average Time Of Occupancy (Dwell Time)	
	CH 0: 2402MHz	
	GFSK	DH1
	 <p>Agilent</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 <math>\Delta</math> 412 <math>\mu</math>s Peak Log 10 dB/ -6.102 dB</p> <p>W1 S2 1R Mkr1 S3 FS AA</p> <p>Center 2.402000000 GHz</p> <p>Center 2.402 GHz Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40200000 GHz</p> <p><b>Stop Freq</b> 2.40200000 GHz</p> <p><b>CF Step</b> 1.00000000 MHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>
Test Model	Average Time Of Occupancy (Dwell Time)	
	CH 0: 2402MHz	
	GFSK	DH3
	 <p>Agilent</p> <p>Ref 10 dBm #Atten 20 dB Mkr1 <math>\Delta</math> 1.68 ms 0.598 dB Peak Log 10 dB/ 0.598 dB</p> <p>W1 S2 1R Mkr1 S3 FS AA</p> <p>Center 2.402000000 GHz</p> <p>Center 2.402 GHz Res BW 1 MHz #VBW 3 MHz Sweep 7 ms (401 pts)</p>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.40200000 GHz</p> <p><b>Stop Freq</b> 2.40200000 GHz</p> <p><b>CF Step</b> 1.00000000 MHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p>

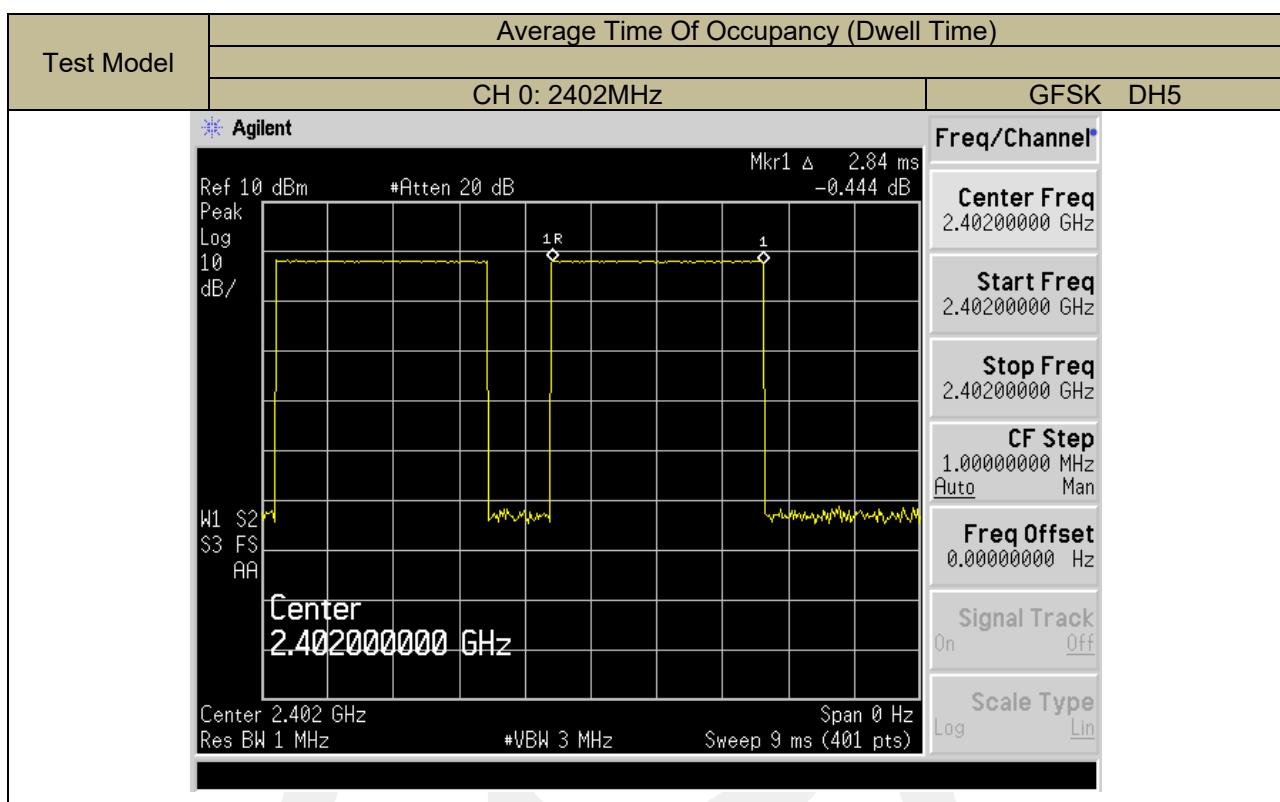

## 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and 558074 D01 15.247 Meas Guidance V05r02

### 9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.5.4 Test Procedure

■ According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW  $\geq$  RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emissionto determine the peak amplitude level.

## Test Results



Temperature: 25°C  
Humidity: 45 %



Test Date: August 12, 2020  
Test By: XW



Operation Mode	Channel Number	Channel Frequency (MHz)	MeasurementLevel (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	1.425	21	PASS
	39	2441	1.567	21	PASS
	78	2480	1.958	21	PASS
pi/4-DQPSK	0	2402	0.844	21	PASS
	39	2441	1.127	21	PASS
	78	2480	1.409	21	PASS
8DPSK	0	2402	1.222	21	PASS
	39	2441	1.462	21	PASS
	78	2480	1.637	21	PASS


Note:N/A

Test Model	Maximum PeakConducted Output Power	
	Channel 0: 2402MHz	GFSK
	<b>Agilent</b> <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Ref 10 dBm      #Atten 20 dB</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402000000 GHz</p> <p>Center 2.402 GHz      #Res BW 3 MHz      #VBW 3 MHz      Span 10 MHz      Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid black; padding: 10px; margin-left: 20px;"> <p>Mkr1 2.402150 GHz 1.425 dBm</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.40200000 GHz</p> <p><b>Start Freq</b> 2.39700000 GHz</p> <p><b>Stop Freq</b> 2.40700000 GHz</p> <p><b>CF Step</b> 1.00000000 MHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p> </div> </div>	
	<b>Agilent</b> <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Ref 10 dBm      #Atten 20 dB</p> <p>Peak Log 10 dB/</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.441000000 GHz</p> <p>Center 2.441 GHz      #Res BW 3 MHz      #VBW 3 MHz      Span 10 MHz      Sweep 4 ms (401 pts)</p> </div> <div style="flex: 1; border: 1px solid black; padding: 10px; margin-left: 20px;"> <p>Mkr1 2.441125 GHz 1.567 dBm</p> <p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 2.44100000 GHz</p> <p><b>Start Freq</b> 2.43600000 GHz</p> <p><b>Stop Freq</b> 2.44600000 GHz</p> <p><b>CF Step</b> 1.00000000 MHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p> <p><b>Scale Type</b> Log Lin</p> </div> </div>	

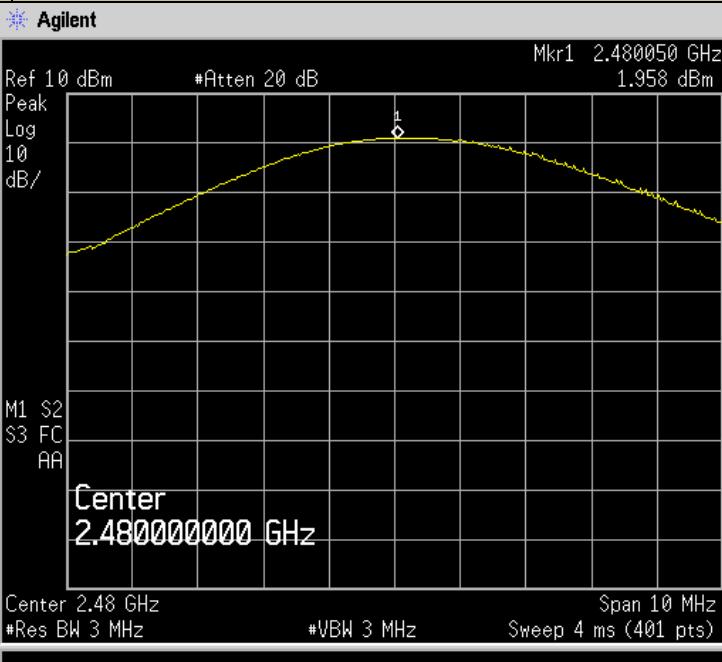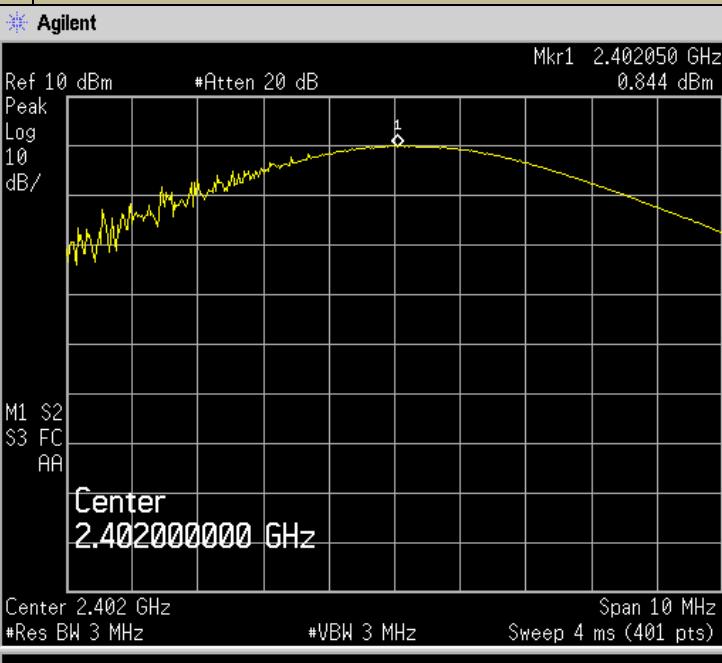Test Model	Maximum PeakConducted Output Power																			
	Channel 78: 2480MHz																			
	GFSK																			
	 <p>Agilent Spectrum Analyzer Plot for Channel 78. The plot shows a single peak at 2.480000000 GHz with a power of 1.958 dBm. The plot includes a grid, frequency markers (M1, S2, S3, FC, AA), and measurement parameters: Center 2.48 GHz, #Res BW 3 MHz, #VBW 3 MHz, Span 10 MHz, Sweep 4 ms (401 pts). The right side of the plot shows the following parameters:</p> <table border="1"> <tr><td>Freq/Channel</td><td></td></tr> <tr><td>Center Freq</td><td>2.48000000 GHz</td></tr> <tr><td>Start Freq</td><td>2.47500000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.48500000 GHz</td></tr> <tr><td>CF Step</td><td>1.00000000 MHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	2.48000000 GHz	Start Freq	2.47500000 GHz	Stop Freq	2.48500000 GHz	CF Step	1.00000000 MHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log	
Freq/Channel																				
Center Freq	2.48000000 GHz																			
Start Freq	2.47500000 GHz																			
Stop Freq	2.48500000 GHz																			
CF Step	1.00000000 MHz																			
Auto	Man																			
Freq Offset	0.00000000 Hz																			
Signal Track	On																			
Scale Type	Log																			
	 <p>Agilent Spectrum Analyzer Plot for Channel 0. The plot shows a single peak at 2.402000000 GHz with a power of 0.844 dBm. The plot includes a grid, frequency markers (M1, S2, S3, FC, AA), and measurement parameters: Center 2.402 GHz, #Res BW 3 MHz, #VBW 3 MHz, Span 10 MHz, Sweep 4 ms (401 pts). The right side of the plot shows the following parameters:</p> <table border="1"> <tr><td>Freq/Channel</td><td></td></tr> <tr><td>Center Freq</td><td>2.40200000 GHz</td></tr> <tr><td>Start Freq</td><td>2.39700000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.40700000 GHz</td></tr> <tr><td>CF Step</td><td>1.00000000 MHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	2.40200000 GHz	Start Freq	2.39700000 GHz	Stop Freq	2.40700000 GHz	CF Step	1.00000000 MHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log	pi/4-DQPSK
Freq/Channel																				
Center Freq	2.40200000 GHz																			
Start Freq	2.39700000 GHz																			
Stop Freq	2.40700000 GHz																			
CF Step	1.00000000 MHz																			
Auto	Man																			
Freq Offset	0.00000000 Hz																			
Signal Track	On																			
Scale Type	Log																			

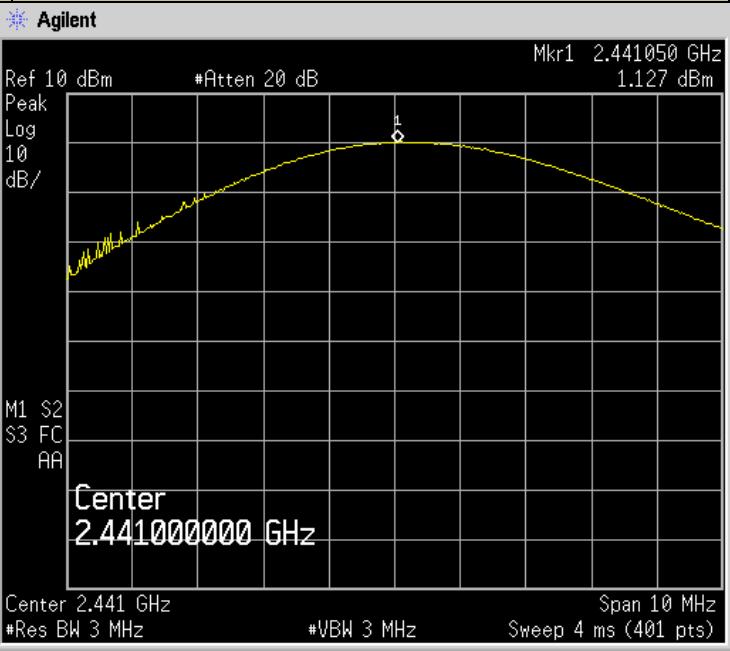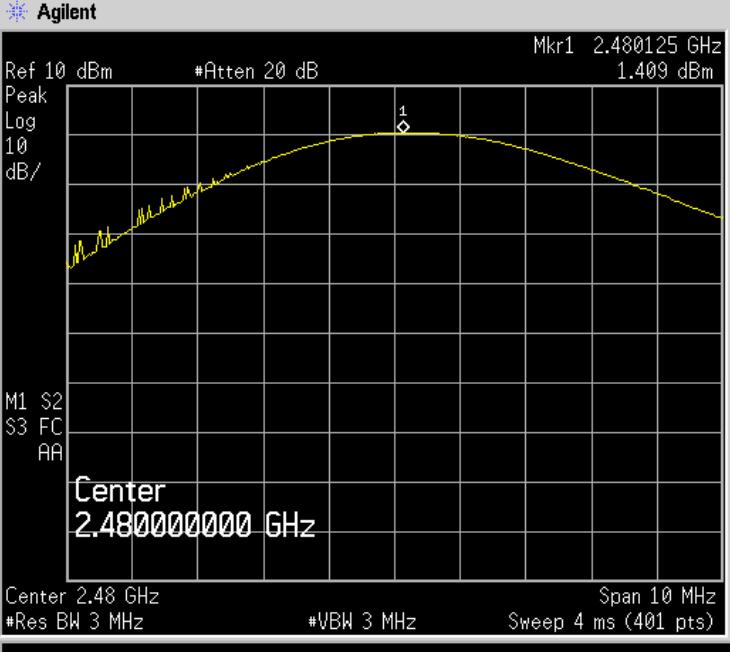Test Model	Maximum PeakConducted Output Power		pi/4-DQPSK	
	Channel 39: 2441MHz			
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 39 at 2441MHz. The plot shows a single peak at 2.441050 GHz with a power of 1.127 dBm. The graph has a logarithmic y-axis (10 dB/10 dB) and a linear x-axis (Span 10 MHz, Sweep 4 ms, 401 pts). The center frequency is 2.44100000 GHz. The plot includes markers for M1, S2, S3, FC, and AA. The legend indicates: Ref 10 dBm, #Atten 20 dB, Mkr1 2.441050 GHz, 1.127 dBm, Center 2.44100000 GHz, Center 2.441 GHz, #Res BW 3 MHz, #VBW 3 MHz, and Sweep 4 ms (401 pts).</p>	<b>Freq/Channel</b> <b>Center Freq</b> <b>Start Freq</b> <b>Stop Freq</b> <b>CF Step</b> <b>Freq Offset</b> <b>Signal Track</b> <b>Scale Type</b>	2.44100000 GHz 2.43600000 GHz 2.44600000 GHz 1.00000000 MHz Auto Man 0.00000000 Hz On Off Log Lin	
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 78 at 2480MHz. The plot shows a single peak at 2.480125 GHz with a power of 1.409 dBm. The graph has a logarithmic y-axis (10 dB/10 dB) and a linear x-axis (Span 10 MHz, Sweep 4 ms, 401 pts). The center frequency is 2.48000000 GHz. The plot includes markers for M1, S2, S3, FC, and AA. The legend indicates: Ref 10 dBm, #Atten 20 dB, Mkr1 2.480125 GHz, 1.409 dBm, Center 2.48000000 GHz, Center 2.48 GHz, #Res BW 3 MHz, #VBW 3 MHz, and Sweep 4 ms (401 pts).</p>	<b>Freq/Channel</b> <b>Center Freq</b> <b>Start Freq</b> <b>Stop Freq</b> <b>CF Step</b> <b>Freq Offset</b> <b>Signal Track</b> <b>Scale Type</b>	2.48000000 GHz 2.47500000 GHz 2.48500000 GHz 1.00000000 MHz Auto Man 0.00000000 Hz On Off Log Lin	

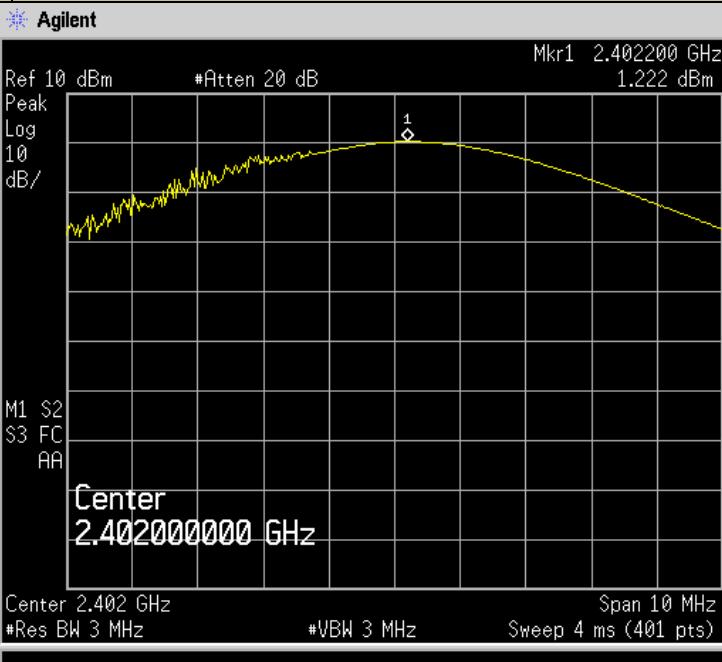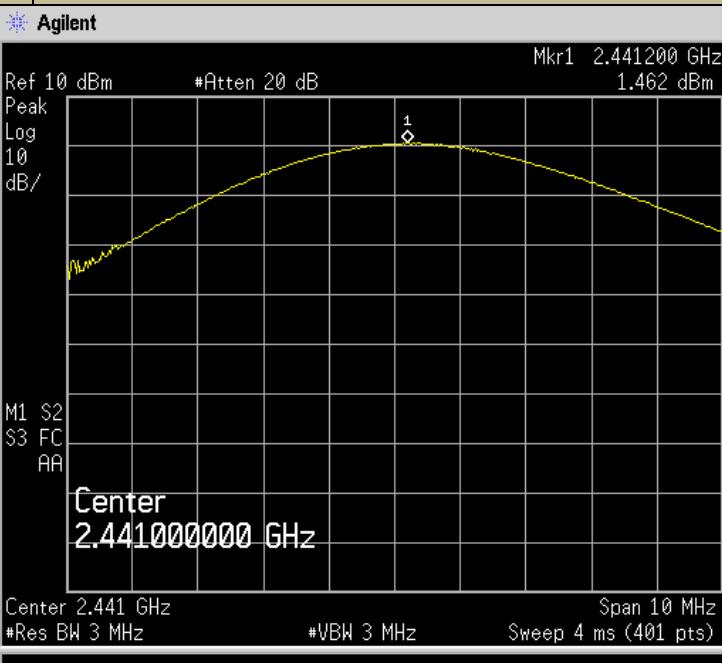Test Model	Maximum PeakConducted Output Power	
	Channel 0: 2402MHz	
	8DPSK	
	 <p>Agilent Spectrum Analyzer Screenshot showing the power spectrum for Channel 0 at 2.402GHz. The plot shows a single peak at 2.402200 GHz with a power of 1.222 dBm. The x-axis is labeled 'Center 2.402 GHz' and 'Span 10 MHz'. The y-axis is labeled '10 dB/Log'. The plot includes markers for M1, S2, S3, FC, and AA. The center frequency is explicitly labeled as 2.402000000 GHz.</p>	<div style="display: flex; justify-content: space-between;"> <div style="flex: 1;"> <b>Freq/Channel</b>  <b>Center Freq</b>  2.40200000 GHz    <b>Start Freq</b>  2.39700000 GHz    <b>Stop Freq</b>  2.40700000 GHz    <b>CF Step</b>  1.00000000 MHz  Auto Man    <b>Freq Offset</b>  0.00000000 Hz    <b>Signal Track</b>  On Off    <b>Scale Type</b>  Log Lin </div> </div>
	 <p>Agilent Spectrum Analyzer Screenshot showing the power spectrum for Channel 39 at 2.441GHz. The plot shows a single peak at 2.441200 GHz with a power of 1.462 dBm. The x-axis is labeled 'Center 2.441 GHz' and 'Span 10 MHz'. The y-axis is labeled '10 dB/Log'. The plot includes markers for M1, S2, S3, FC, and AA. The center frequency is explicitly labeled as 2.441000000 GHz.</p>	<div style="display: flex; justify-content: space-between;"> <div style="flex: 1;"> <b>Freq/Channel</b>  <b>Center Freq</b>  2.44100000 GHz    <b>Start Freq</b>  2.43600000 GHz    <b>Stop Freq</b>  2.44600000 GHz    <b>CF Step</b>  1.00000000 MHz  Auto Man    <b>Freq Offset</b>  0.00000000 Hz    <b>Signal Track</b>  On Off    <b>Scale Type</b>  Log Lin </div> </div>

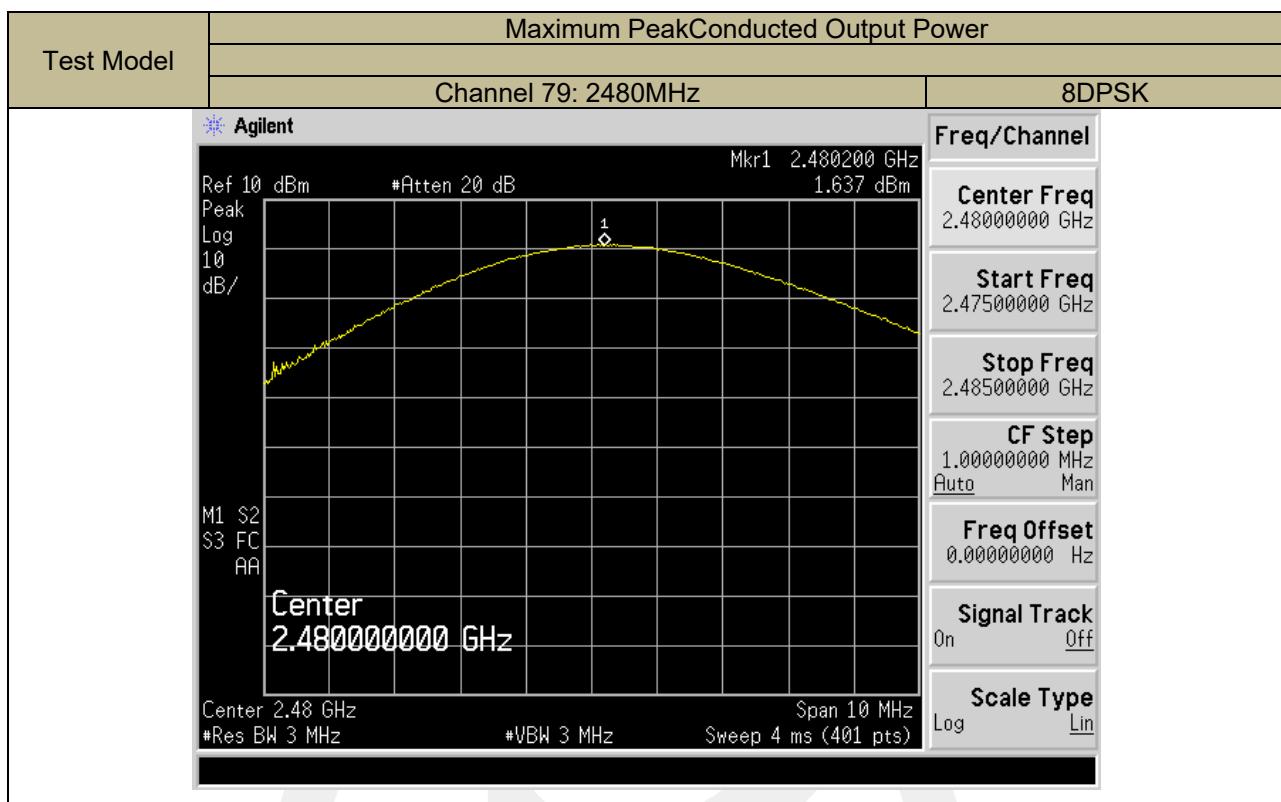

## 9.6 CONDUCTED SUPRIOUS EMISSION

### 9.6.1 Applicable Standard

According to FCC Part 15.247(d) and 558074 D01 15.247 Meas Guidance V05r02

### 9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW  $\geq$  3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconductedlevel.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq$  1% of the span=100kHzSet VBW  $\geq$  RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ ConductedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW $\geq$  RBW


Set Sweep = autoSetDetector function = peakSetTrace = max hold



Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


### 9.6.5 Test Results


Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK)was report as below:

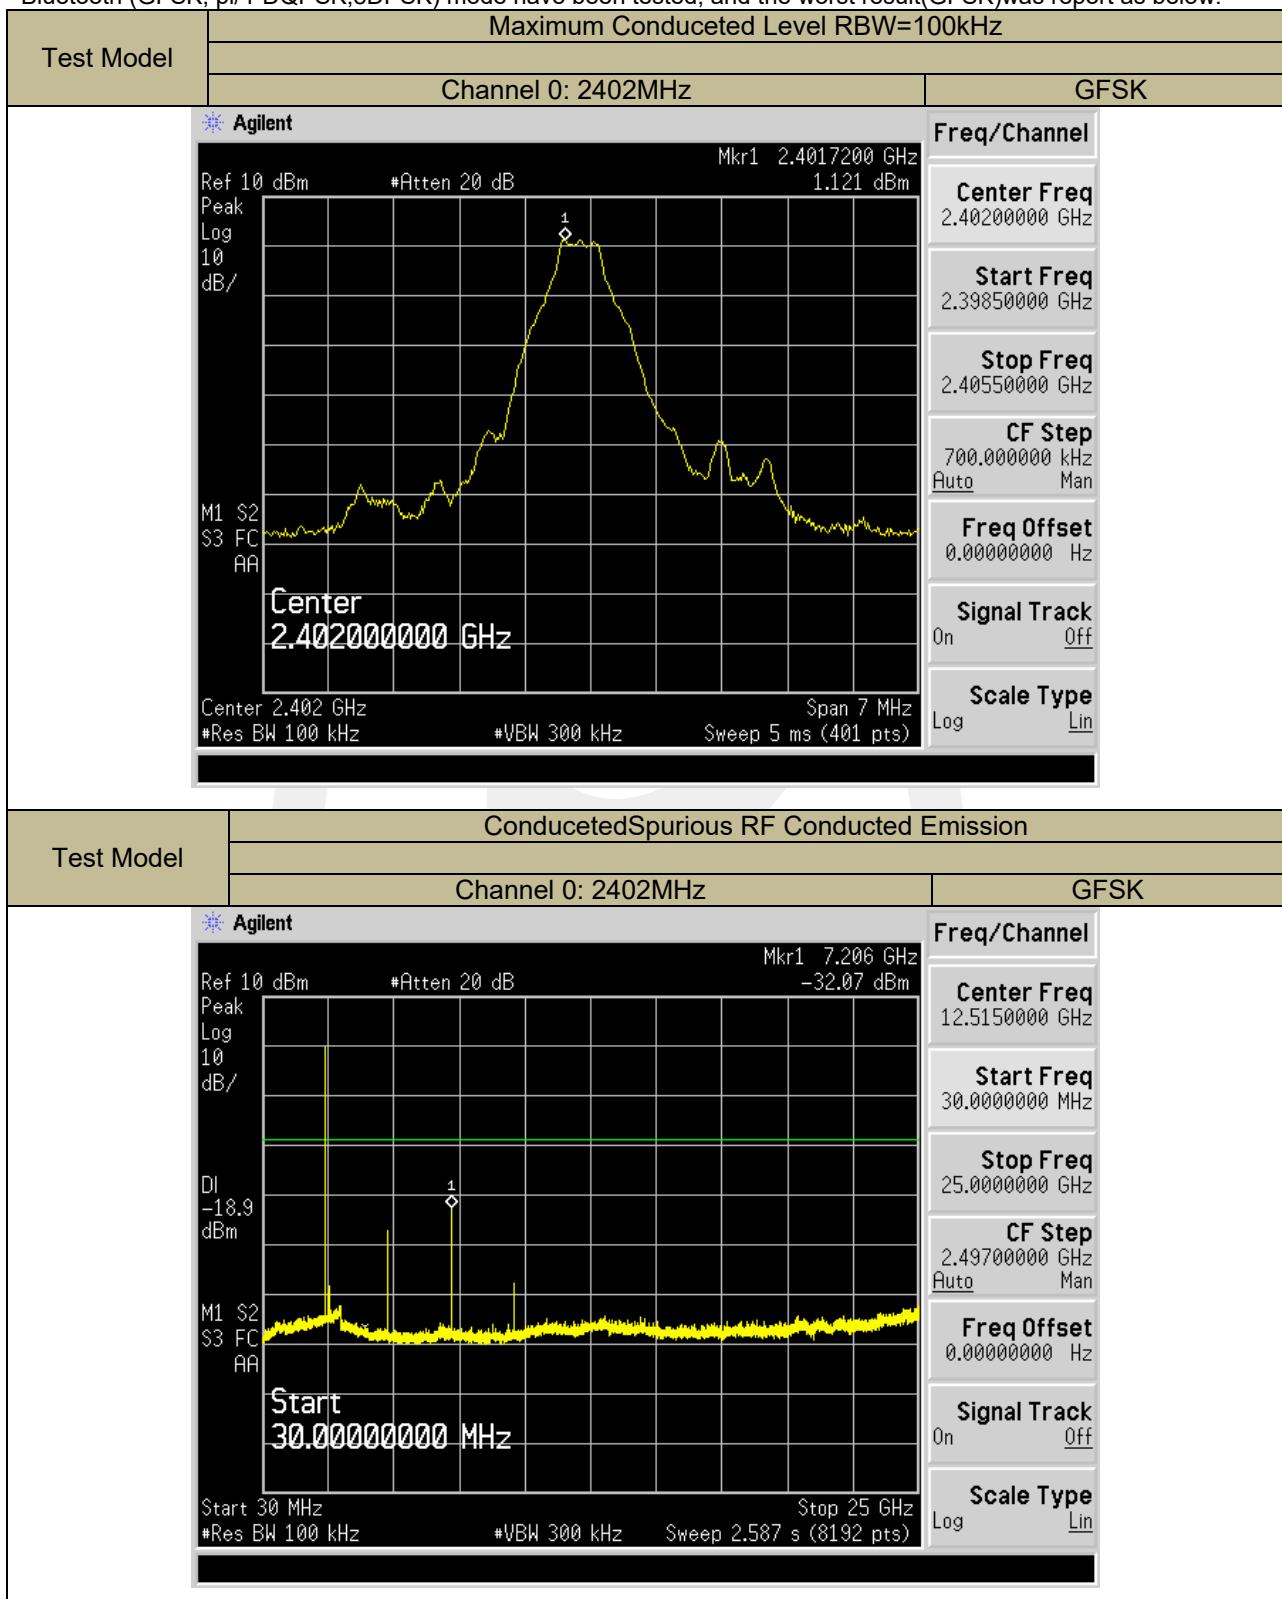


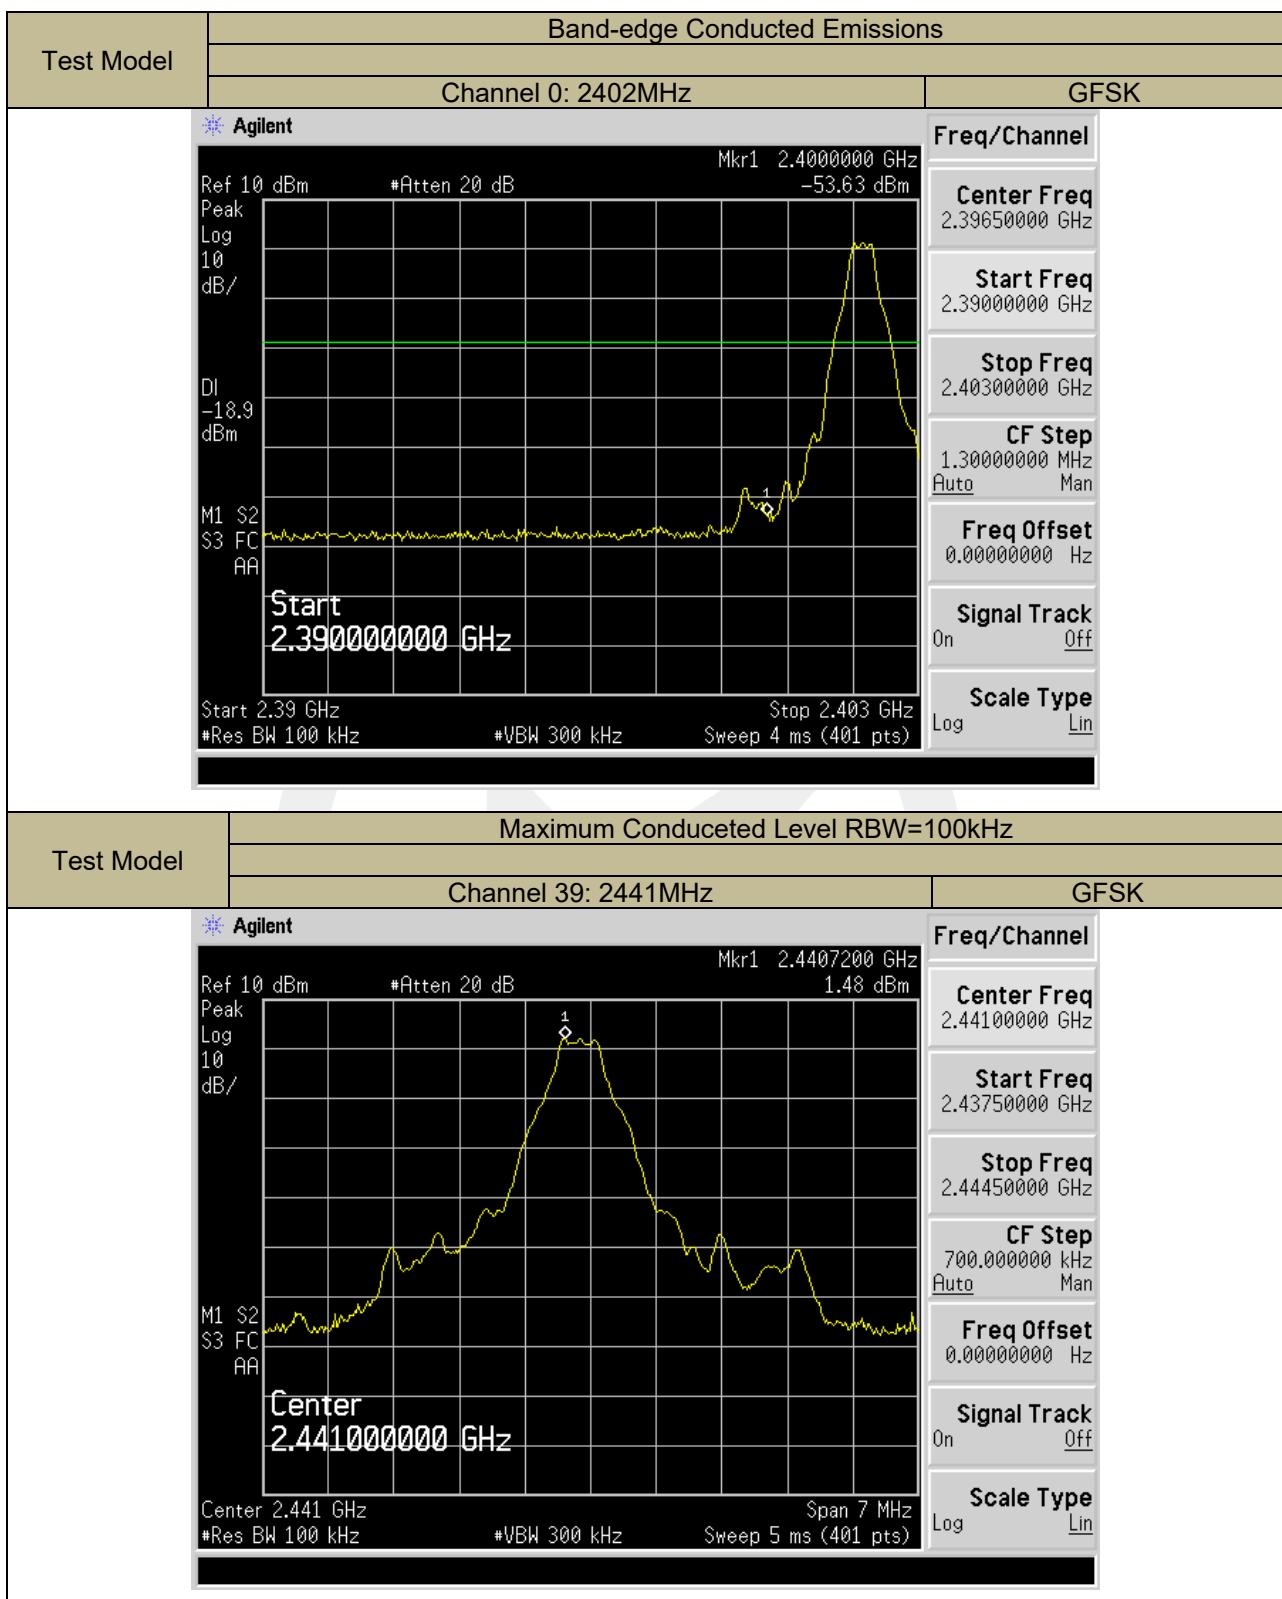

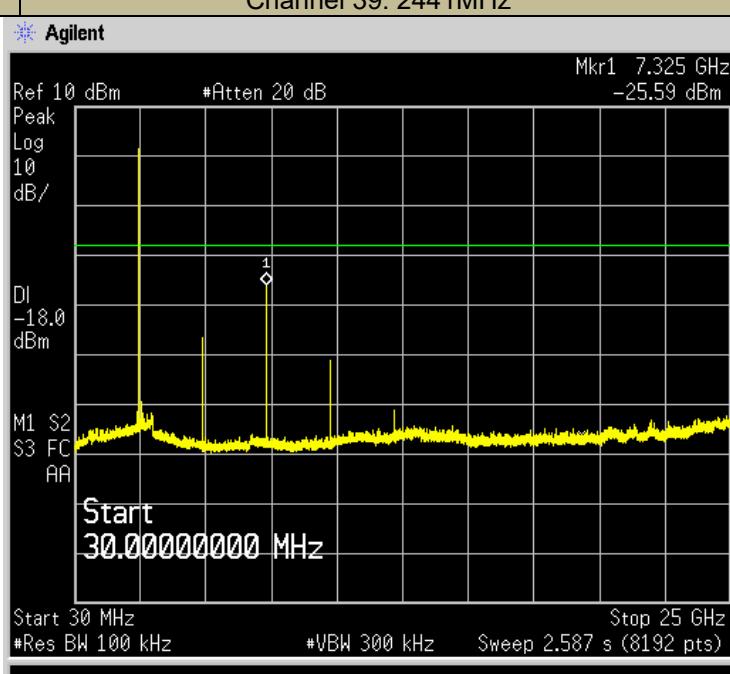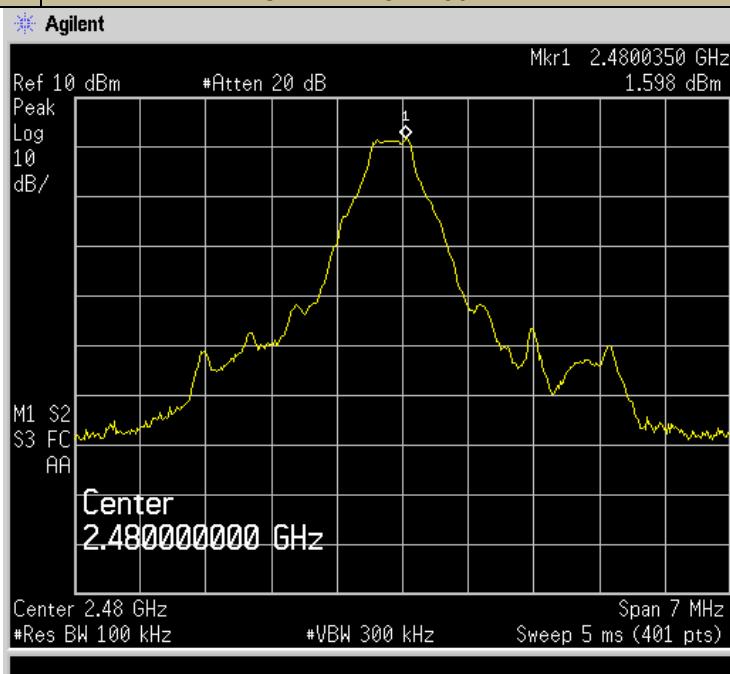Test Model	Conducted Spurious RF Conducted Emission		GFSK																	
	Channel 39: 2441MHz																			
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 39. The plot shows a single sharp peak at 2441 MHz. The Y-axis is Peak Log 10 dB/ and the X-axis is Start 30 MHz to Stop 25 GHz. The right panel shows the following parameters:</p> <table border="1"> <tr><td>Freq/Channel</td><td></td></tr> <tr><td>Center Freq</td><td>12.5150000 GHz</td></tr> <tr><td>Start Freq</td><td>30.0000000 MHz</td></tr> <tr><td>Stop Freq</td><td>25.0000000 GHz</td></tr> <tr><td>CF Step</td><td>2.49700000 GHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	12.5150000 GHz	Start Freq	30.0000000 MHz	Stop Freq	25.0000000 GHz	CF Step	2.49700000 GHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log	
Freq/Channel																				
Center Freq	12.5150000 GHz																			
Start Freq	30.0000000 MHz																			
Stop Freq	25.0000000 GHz																			
CF Step	2.49700000 GHz																			
Auto	Man																			
Freq Offset	0.00000000 Hz																			
Signal Track	On																			
Scale Type	Log																			
	 <p>Agilent Spectrum Analyzer Screenshot for Channel 78. The plot shows a broad emission centered at 2480 MHz. The Y-axis is Peak Log 10 dB/ and the X-axis is Center 2.48 GHz to Stop 25 GHz. The right panel shows the following parameters:</p> <table border="1"> <tr><td>Freq/Channel</td><td></td></tr> <tr><td>Center Freq</td><td>2.48000000 GHz</td></tr> <tr><td>Start Freq</td><td>2.47650000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.48350000 GHz</td></tr> <tr><td>CF Step</td><td>700.000000 kHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	2.48000000 GHz	Start Freq	2.47650000 GHz	Stop Freq	2.48350000 GHz	CF Step	700.000000 kHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log	
Freq/Channel																				
Center Freq	2.48000000 GHz																			
Start Freq	2.47650000 GHz																			
Stop Freq	2.48350000 GHz																			
CF Step	700.000000 kHz																			
Auto	Man																			
Freq Offset	0.00000000 Hz																			
Signal Track	On																			
Scale Type	Log																			

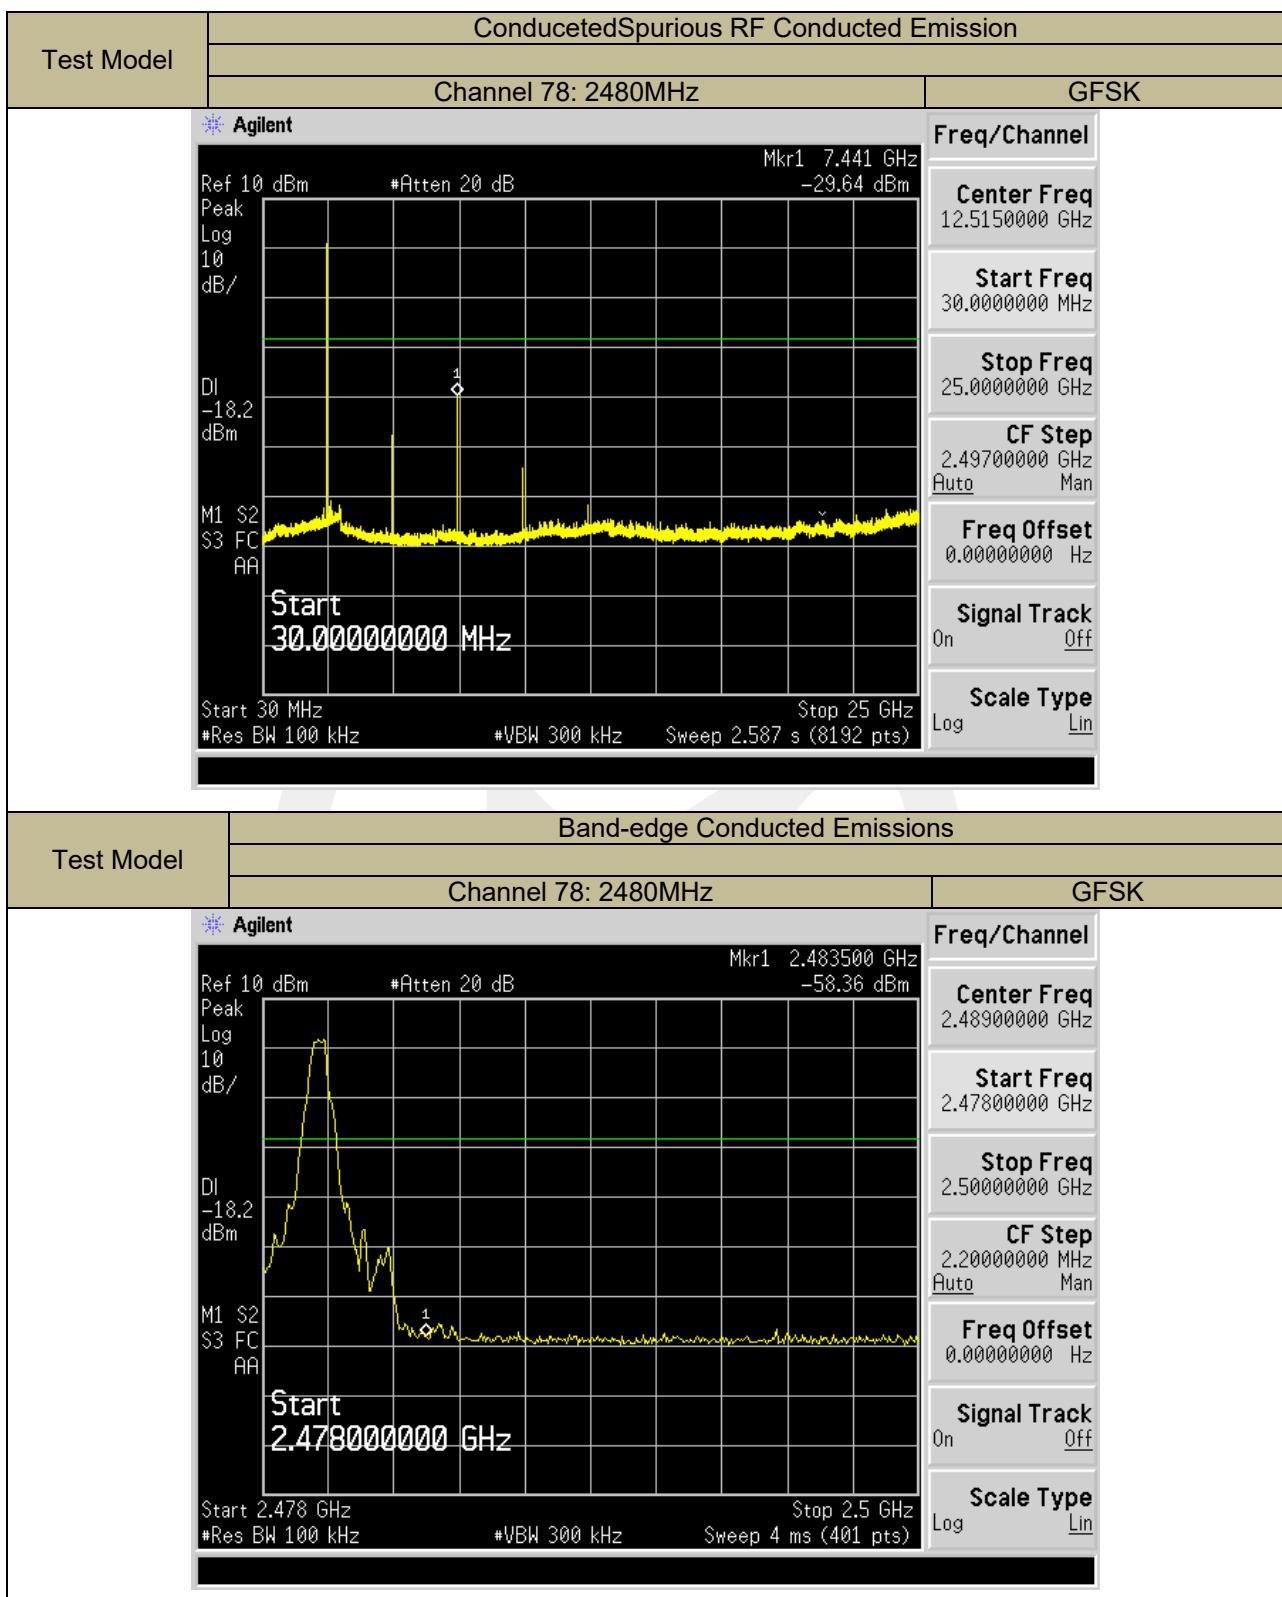

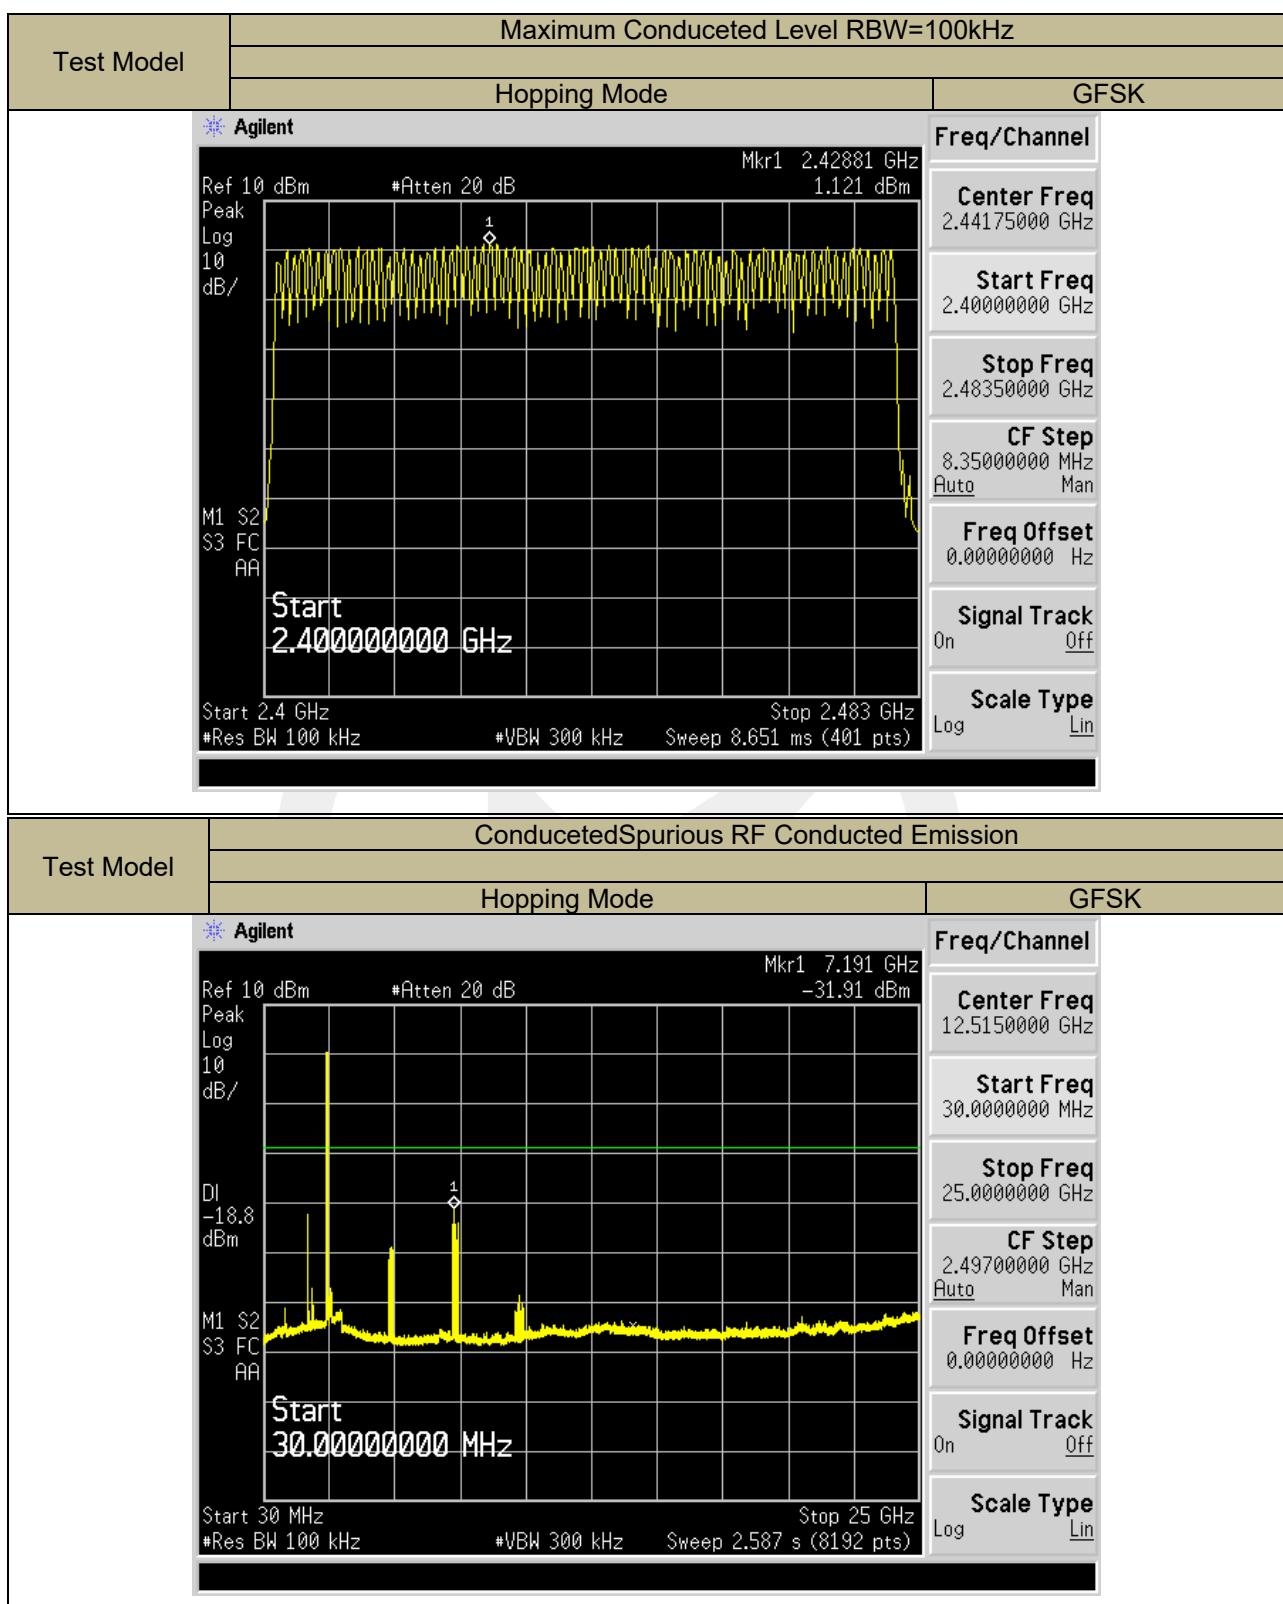

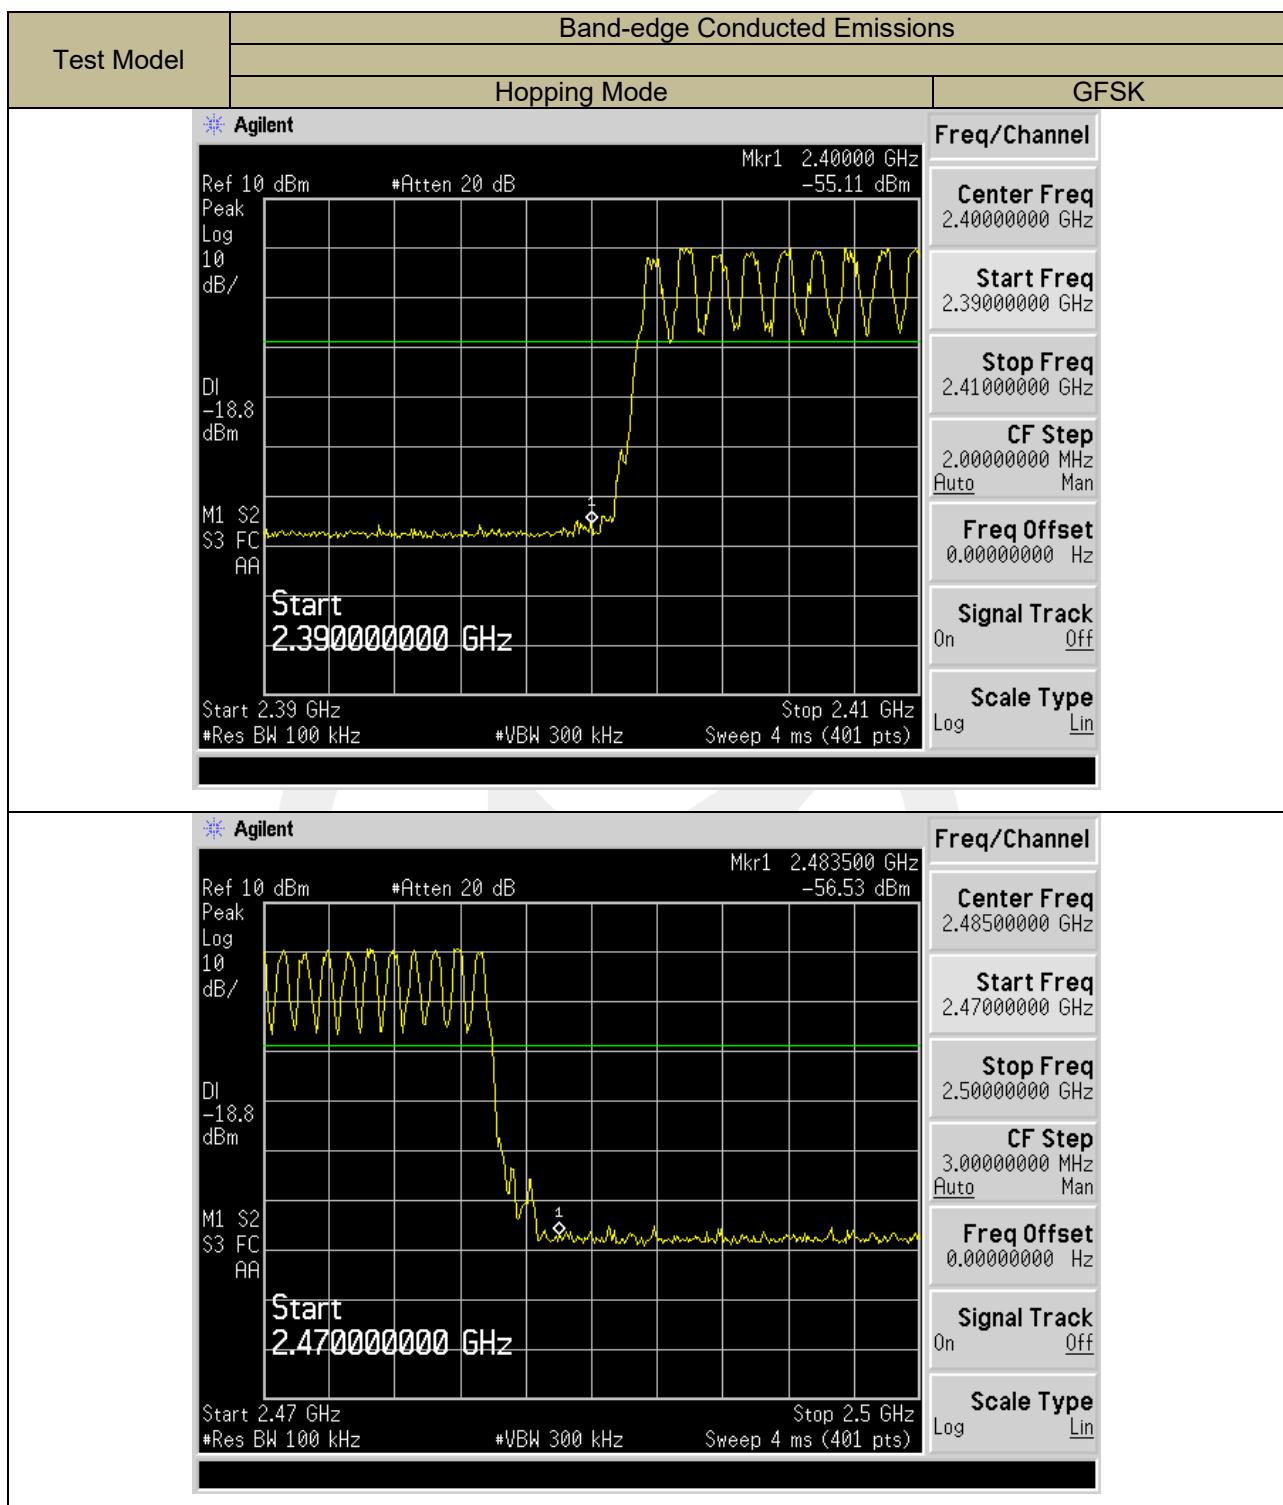

## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $dB\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490-1.705	24000/F(KHz)	20 log ( $\mu$ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz (1GHz to 25GHz), 100 kHz for  $f < 1$  GHz (30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 9.7.5 Test Results

#### ■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	24 °C	Test Date:	August 17, 2020
Humidity:	55 %	Test By:	XW
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})(\text{dB})$ ;  
Limit line=Specific limits(dBuV) + distance extrapolation factor

#### ■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK,8DPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Temperature:	24 °C	Test Date:	August 17, 2020
Humidity:	55 %	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
8077.260	V	52.88	43.85	74.00	54.00	-21.12	-10.15
11004.82	V	53.78	43.78	74.00	54.00	-20.22	-10.22
17015.74	V	59.92	49.53	74.00	54.00	-14.08	-4.47
2675.339	H	43.80	34.75	74.00	54.00	-30.20	-19.25
10973.92	H	53.58	44.12	74.00	54.00	-20.42	-9.88
17063.65	H	57.66	45.37	74.00	54.00	-16.34	-8.63

Temperature: 24°C  
 Humidity: 55 %  
 Test mode: GFSK

Test Date: August 17, 2020  
 Test By: XW  
 Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7279.206	V	48.74	40.12	74.00	54.00	-25.26	-13.88
10851.19	V	53.84	44.85	74.00	54.00	-20.16	-9.15
18000.00	V	58.49	45.69	74.00	54.00	-15.51	-8.31
7678.645	H	49.34	41.87	74.00	54.00	-24.66	-12.13
11004.82	H	54.86	41.25	74.00	54.00	-19.14	-12.75
13588.27	H	54.60	43.25	74.00	54.00	-19.40	-10.75

Temperature: 24°C  
 Humidity: 55 %  
 Test mode: GFSK

Test Date: August 17, 2020  
 Test By: XW  
 Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
11478.87	V	53.40	44.75	74.00	54.00	-20.60	-9.25
16967.96	V	57.77	46.35	74.00	54.00	-16.23	-7.65
17899.06	V	59.06	49.12	74.00	54.00	-14.94	-4.88
6823.37	H	49.01	40.23	74.00	54.00	-24.99	-13.77
10729.84	H	53.06	41.78	74.00	54.00	-20.94	-12.22
13936.51	H	53.13	41.56	74.00	54.00	-20.87	-12.44

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Temperature:	24°C	Test Date:	August 17, 2020
Humidity:	55%	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2387.476	H	38.41	74.00	-35.59	31.78	54.00	-22.22
2336.082	V	38.56	74.00	-35.44	34.63	54.00	-19.37

Temperature:	24°C	Test Date:	August 17, 2020
Humidity:	55%	Test By:	XW
Test mode:	GFSK	Frequency:	Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2483.520	H	38.57	74.00	-35.43	32.98	54.00	-21.02
2485.064	V	38.60	74.00	-35.40	33.45	54.00	-20.55

Temperature:	24°C	Test Date:	August 17, 2020
Humidity:	55%	Test By:	XW
Test mode:	GFSK	Frequency:	Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2390.000	H	50.42	74.00	-23.58	40.42	54.00	-13.58
2483.500	H	59.15	74.00	-14.85	49.63	54.00	-4.37
2390.000	V	46.52	74.00	-27.48	40.52	54.00	-13.48
2483.500	V	66.46	74.00	-7.54	50.26	54.00	-3.74


**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

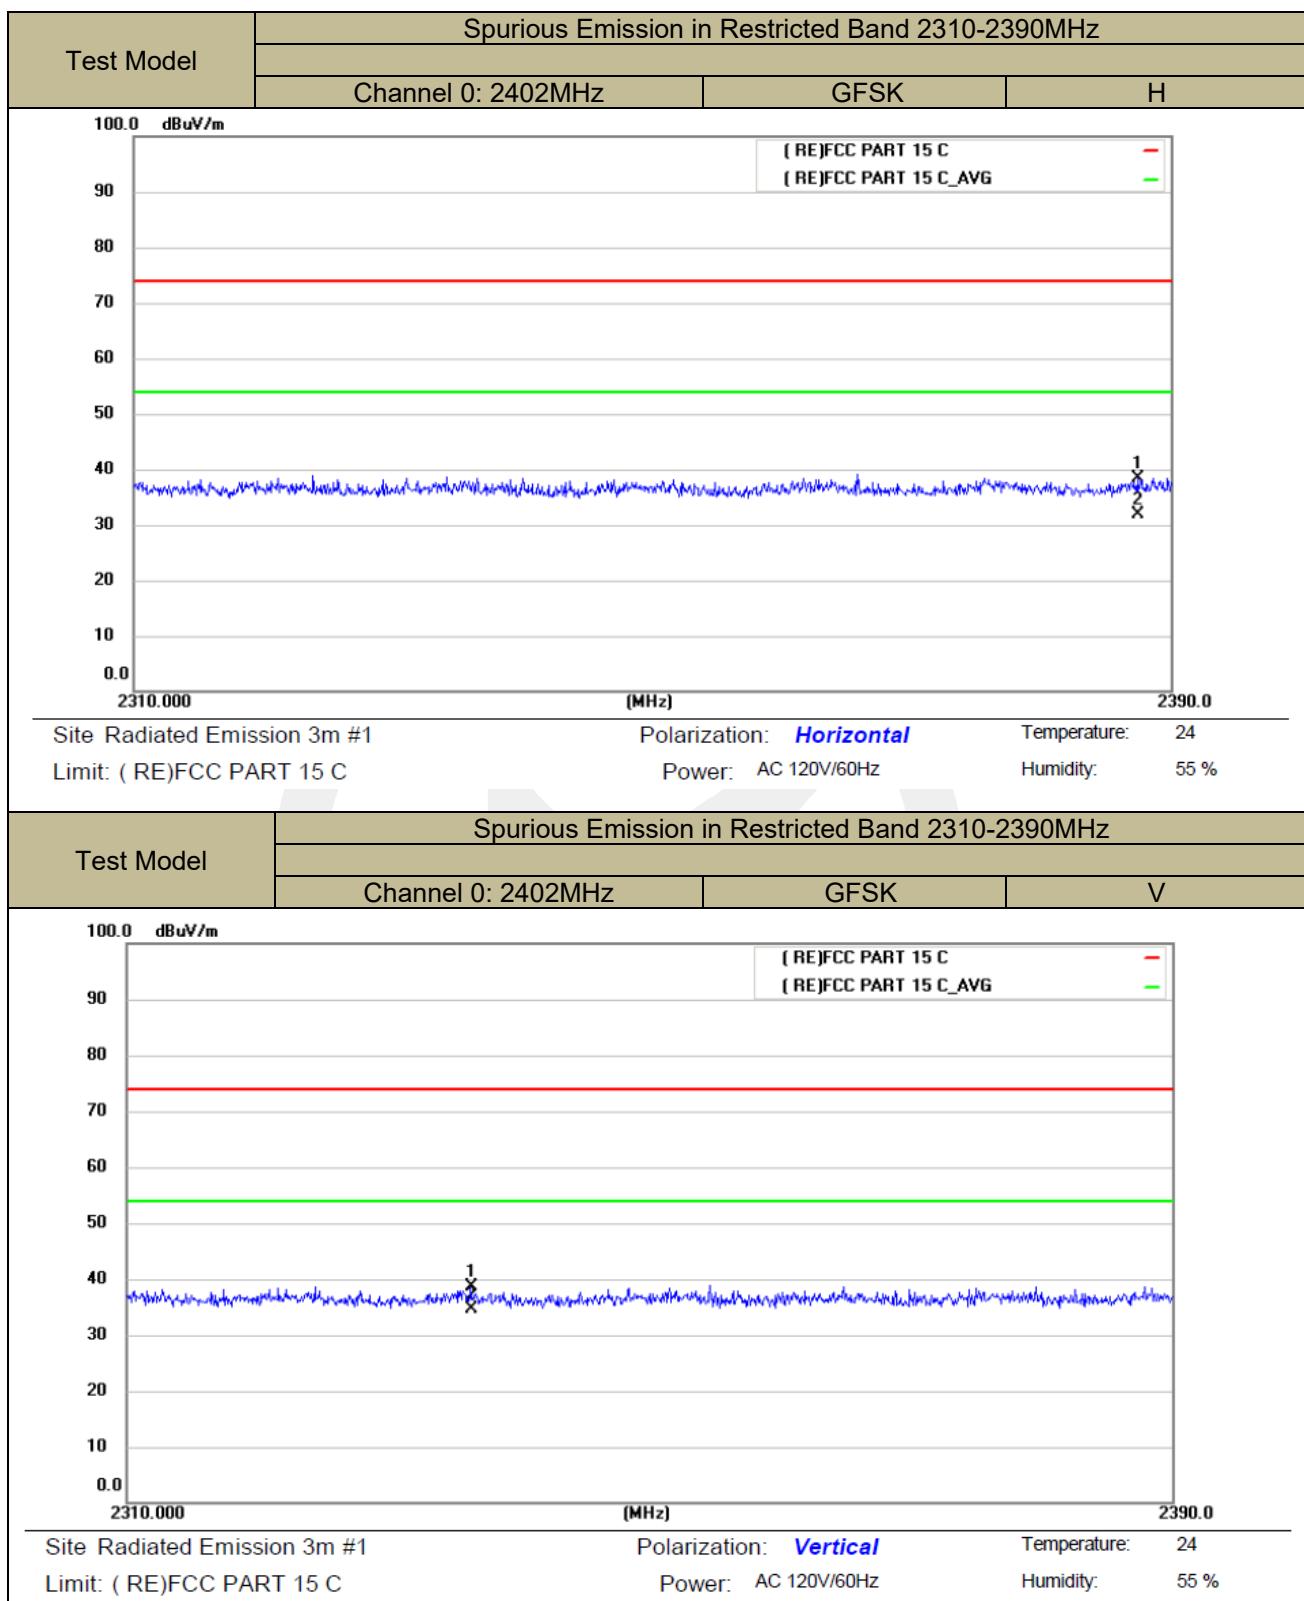


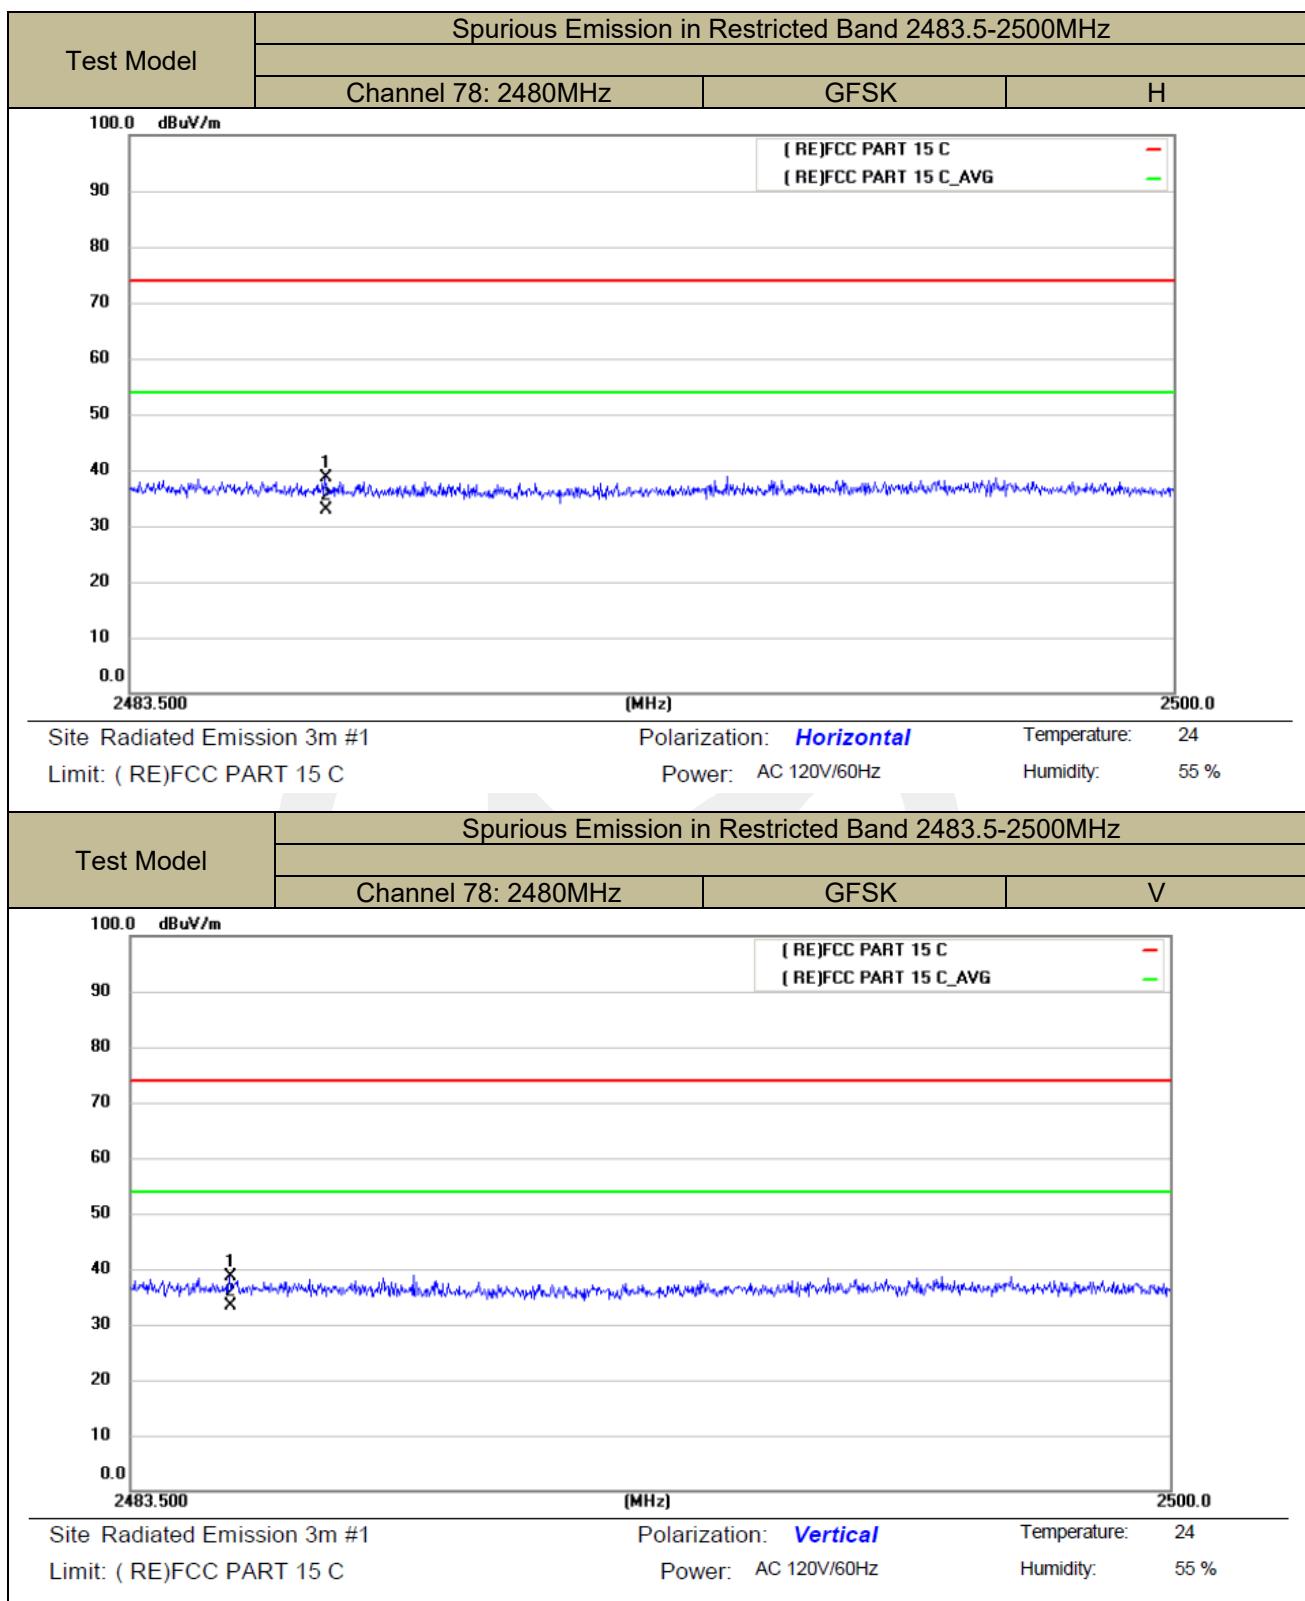


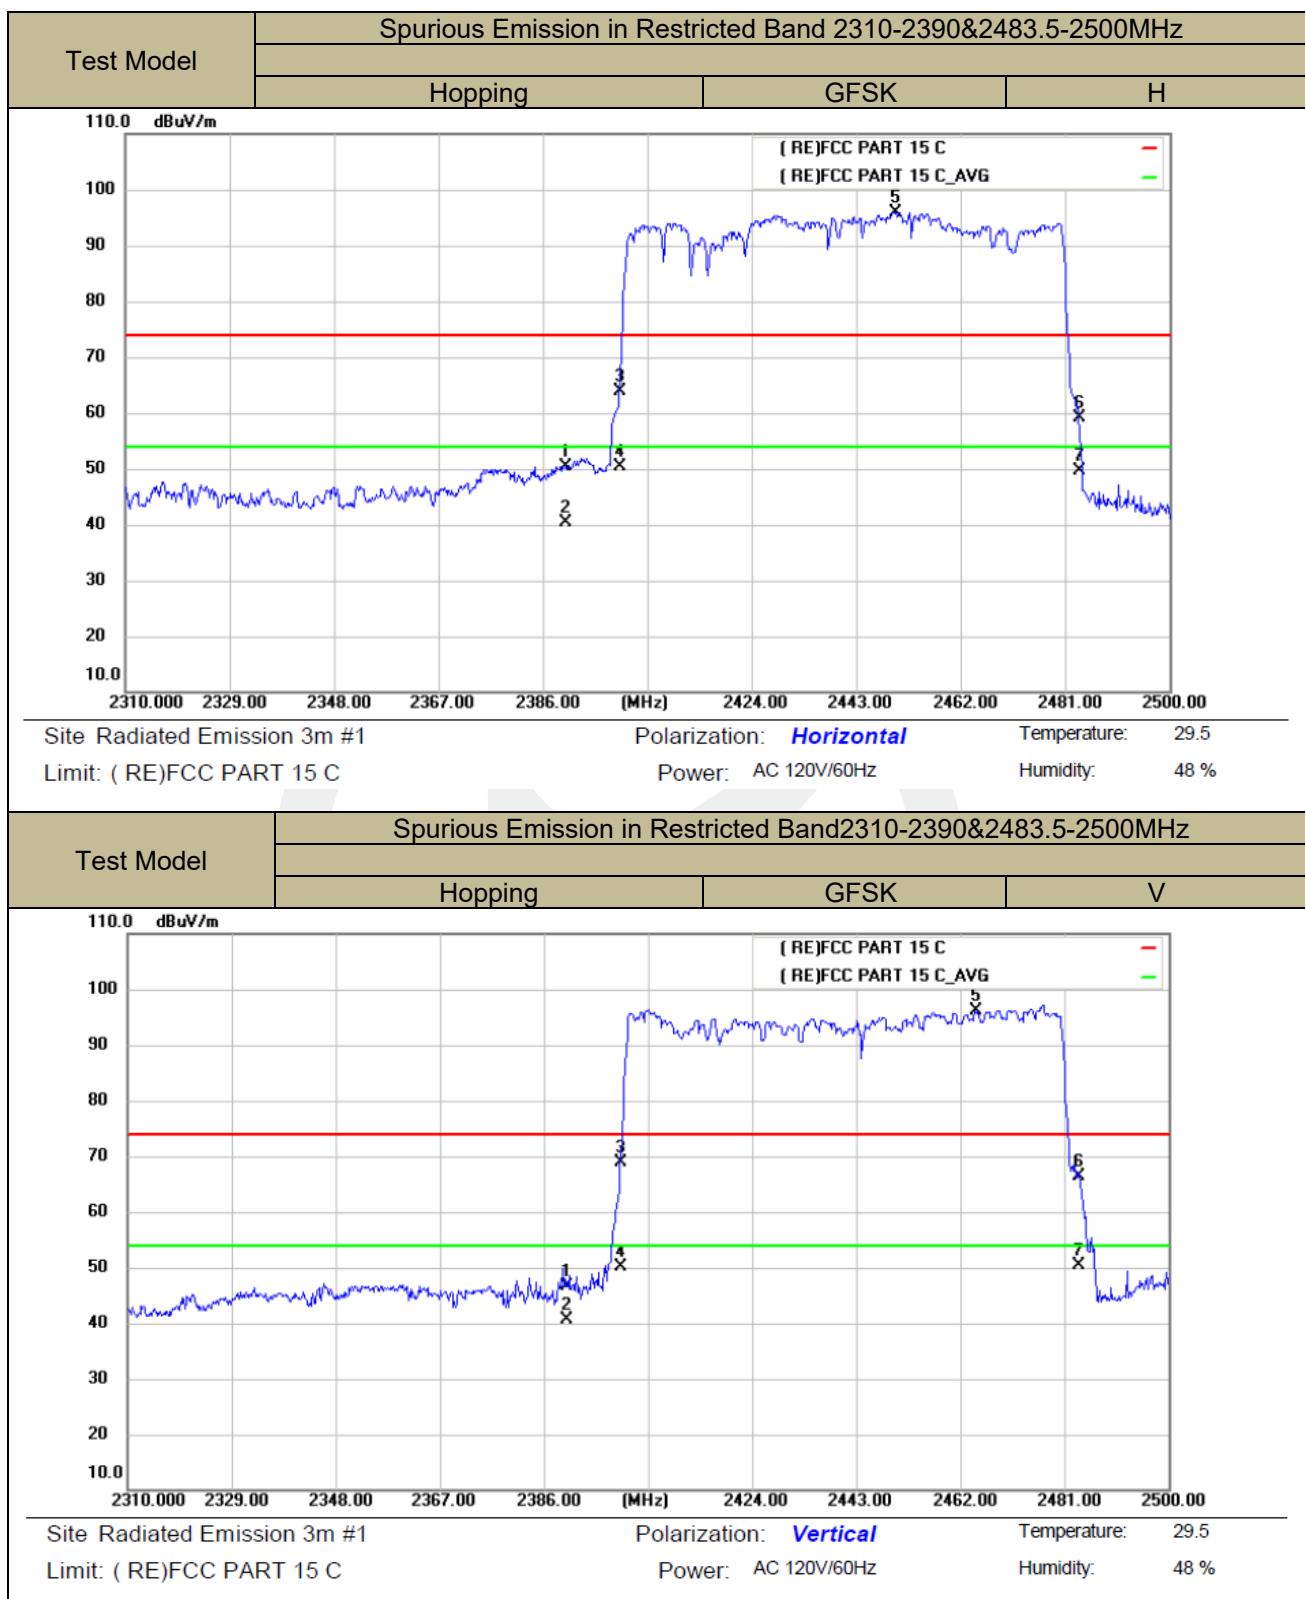



■ Spurious Emission below 1GHz(30MHz to 1GHz)


Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK) recorded was report as below:

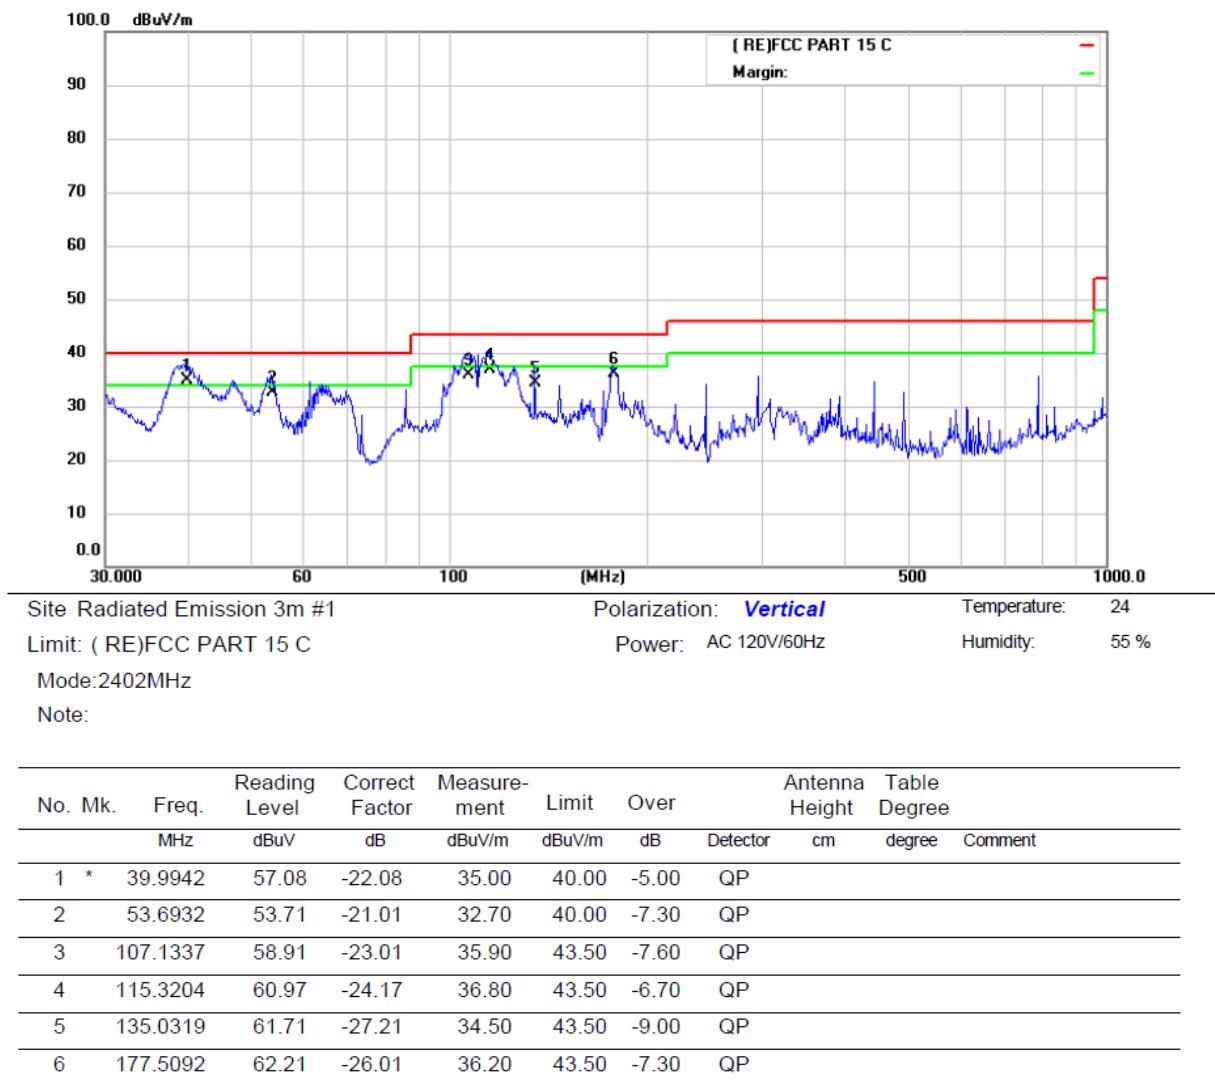


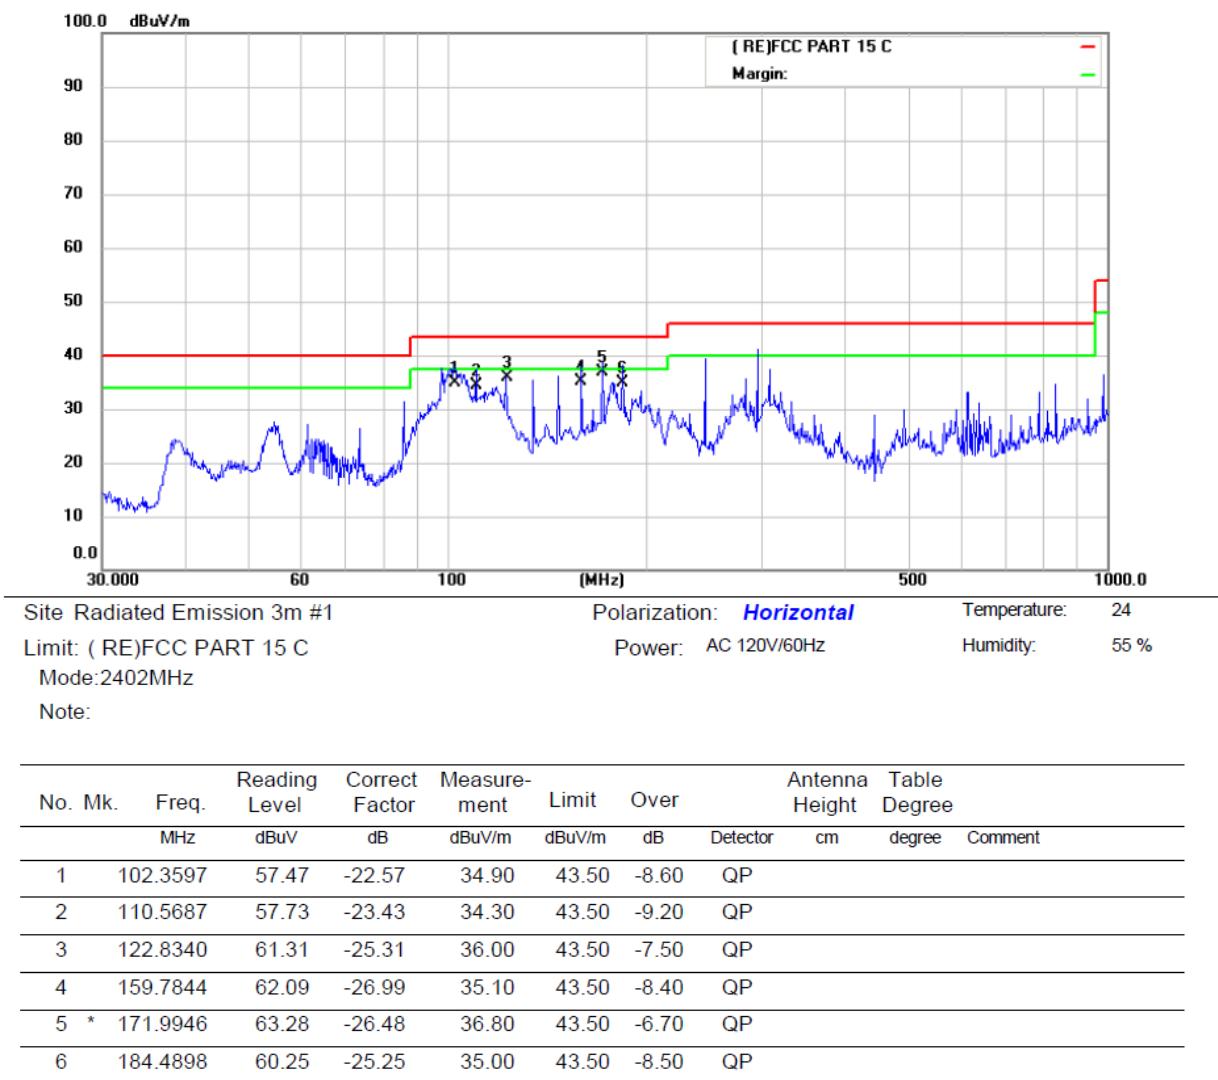

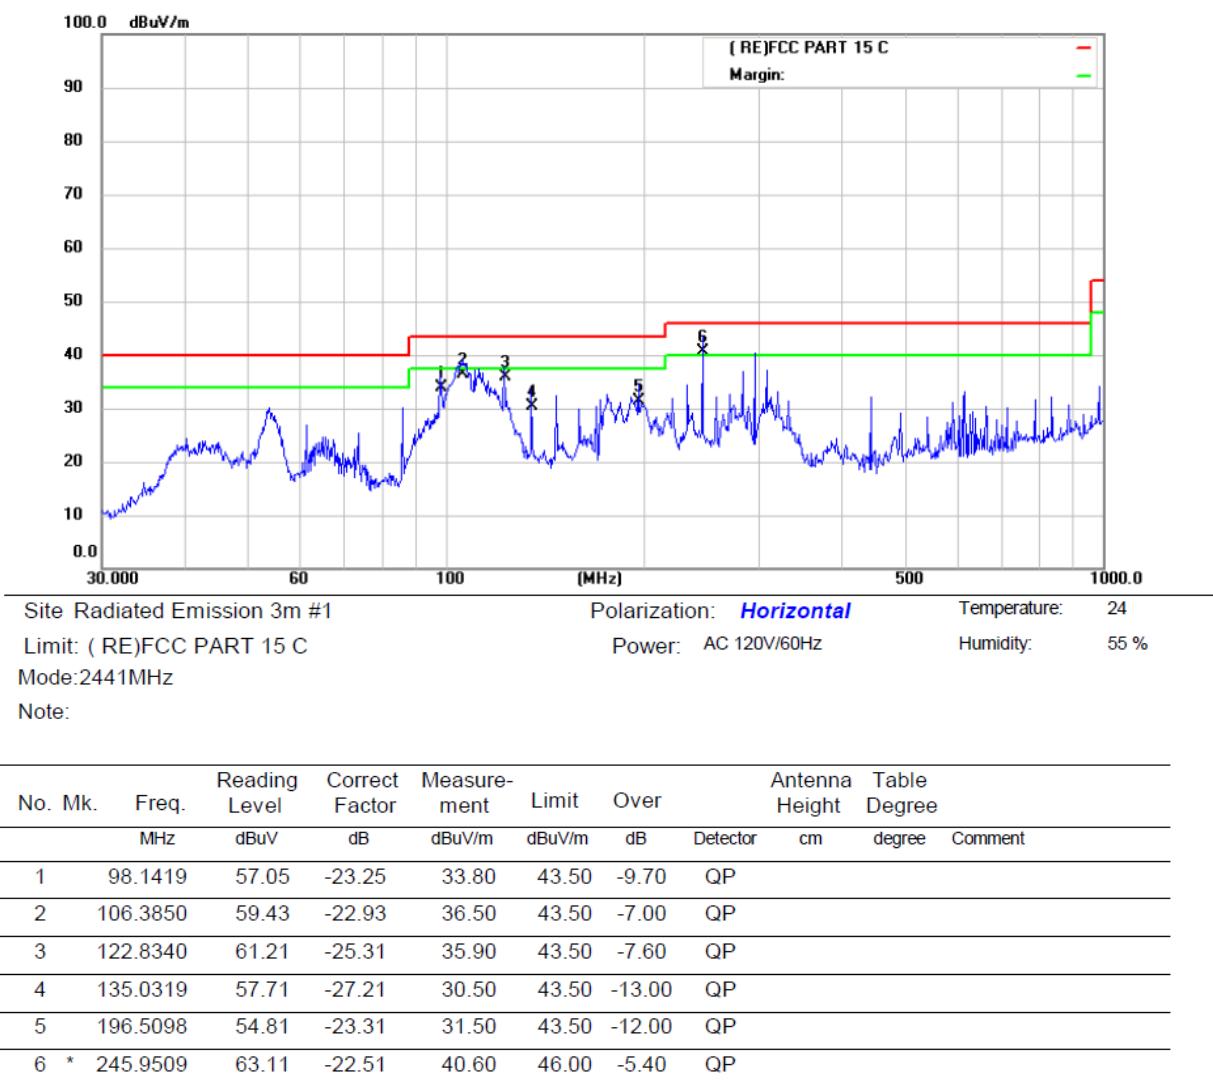

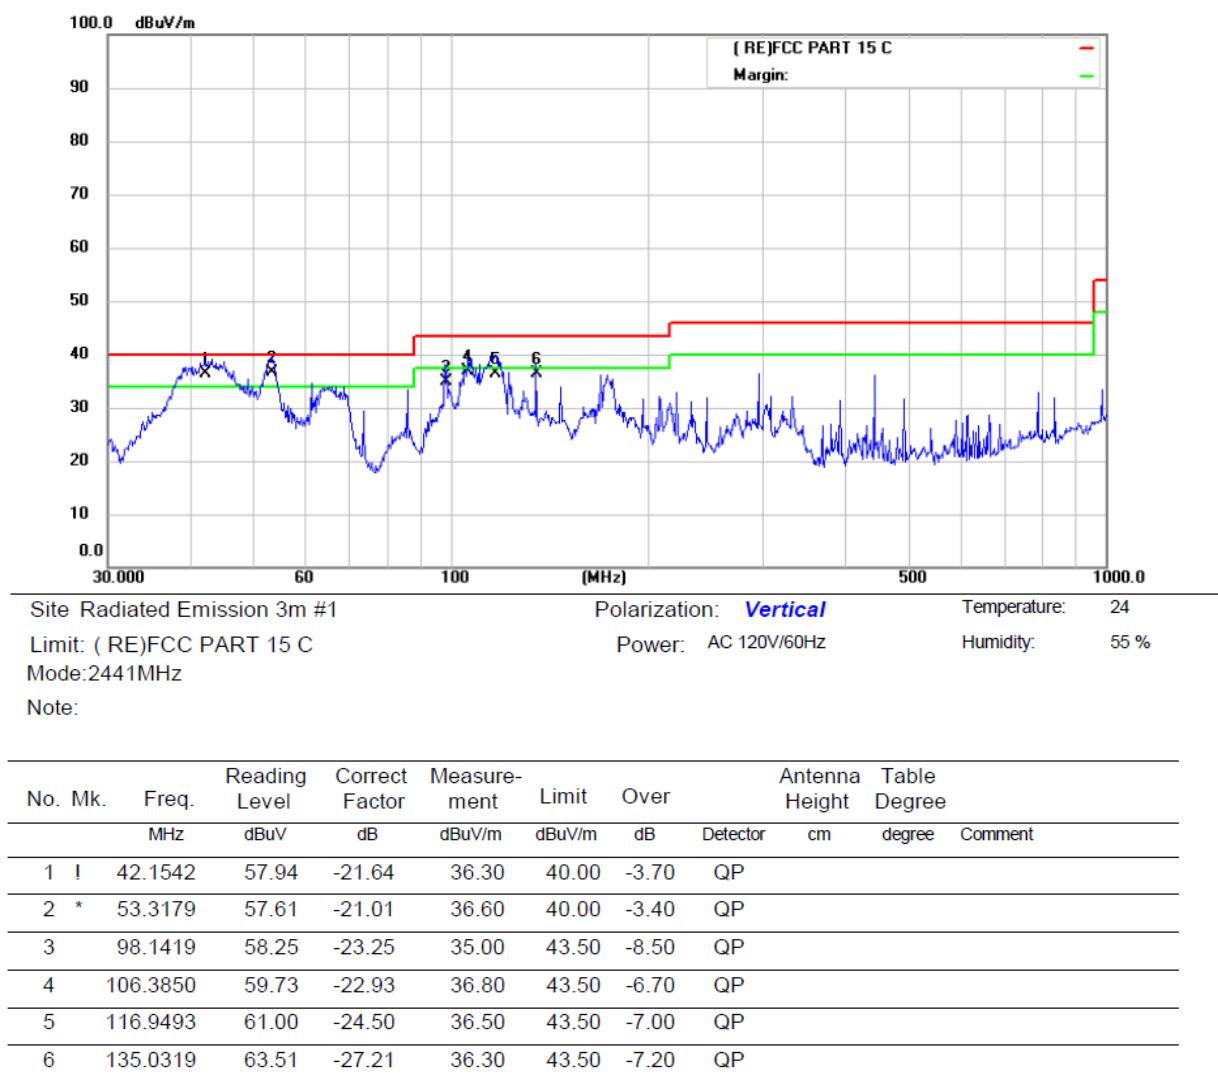

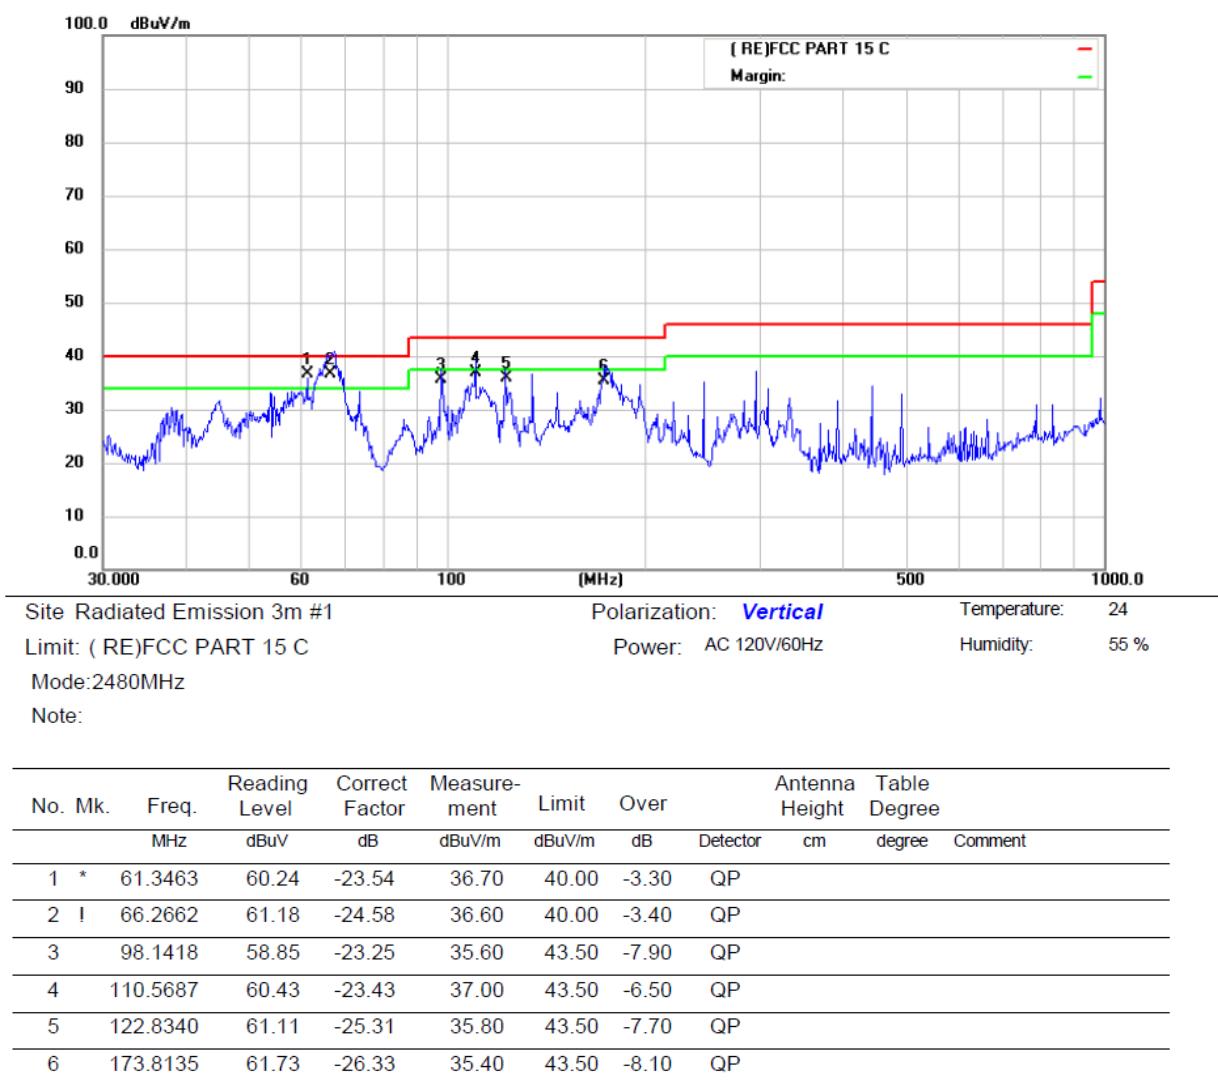

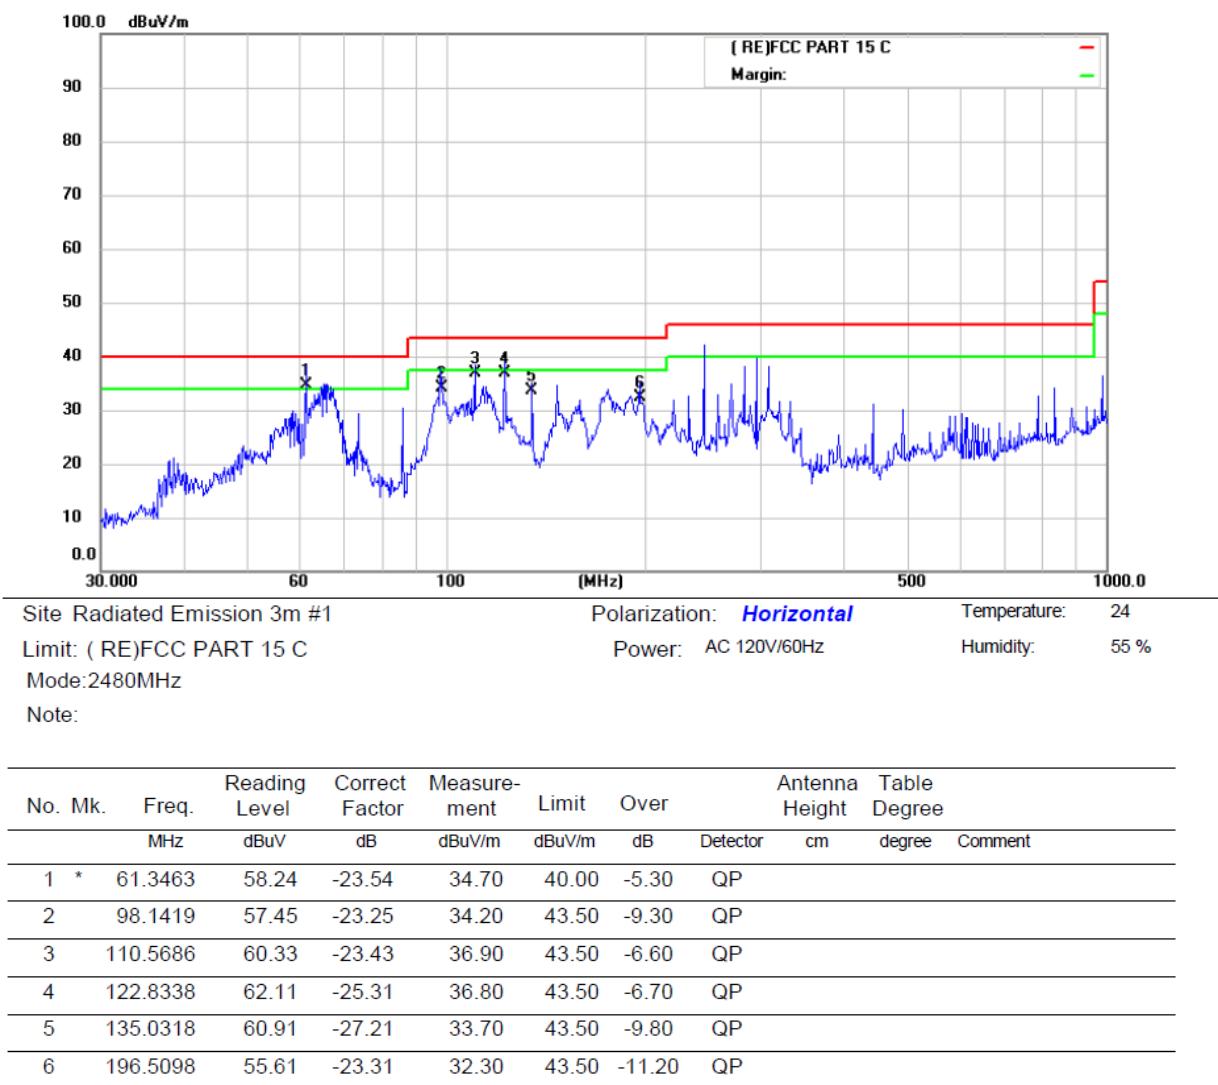

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 9.8.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit		Average
	Quasi-peak		
0.15-0.5	66-56		56-46
0.5-5.0	56		46
5.0-30.0	60		50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


### 9.8.4 Test Procedure

The EUT was placed on a table which is 0.1m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results


**Pass.**

The 120V &240V voltagehave been tested, and the worst result recorded was report as below:

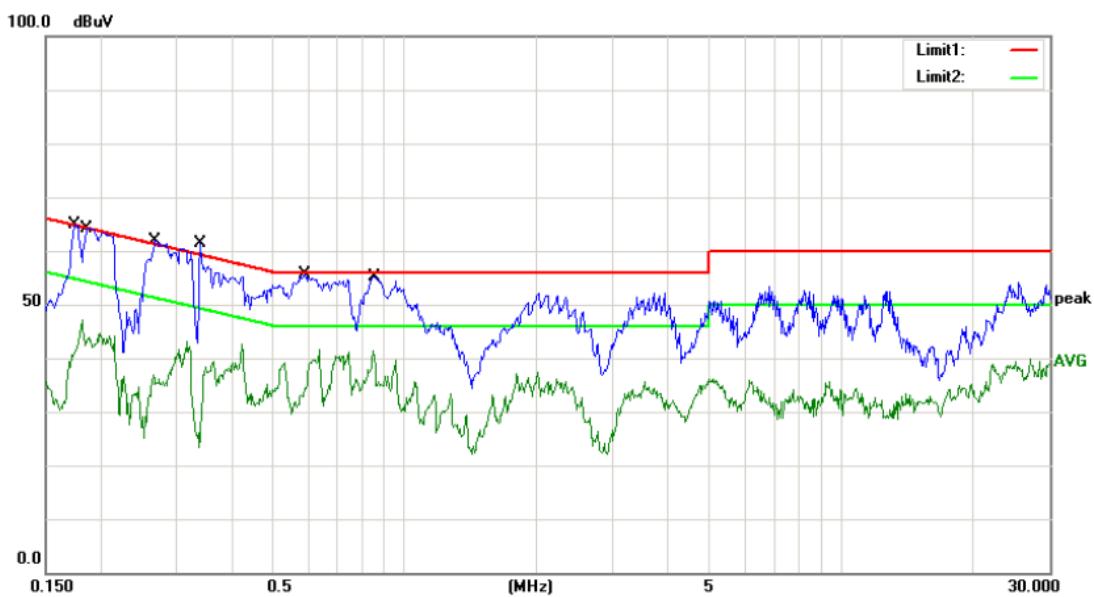

Site site #1 Phase: **L1** Temperature: 24  
 Limit: (CE)FCC PART 15.207\_QP Power: AC 120V/60Hz Humidity: 50 %  
 Mode: TX  
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1750	50.60	10.08	60.68	64.72	-4.04	QP	
2		0.1750	30.40	10.08	40.48	54.72	-14.24	AVG	
3		0.1862	49.10	10.08	59.18	64.20	-5.02	QP	
4		0.1862	33.00	10.08	43.08	54.20	-11.12	AVG	
5	*	0.2671	47.60	10.09	57.69	61.21	-3.52	QP	
6		0.2671	25.00	10.09	35.09	51.21	-16.12	AVG	
7		0.3392	44.20	10.09	54.29	59.22	-4.93	QP	
8		0.3392	14.70	10.09	24.79	49.22	-24.43	AVG	
9		0.5900	41.40	10.06	51.46	56.00	-4.54	QP	
10		0.5900	24.30	10.06	34.36	46.00	-11.64	AVG	
11		0.8460	41.20	9.94	51.14	56.00	-4.86	QP	
12		0.8460	31.30	9.94	41.24	46.00	-4.76	AVG	

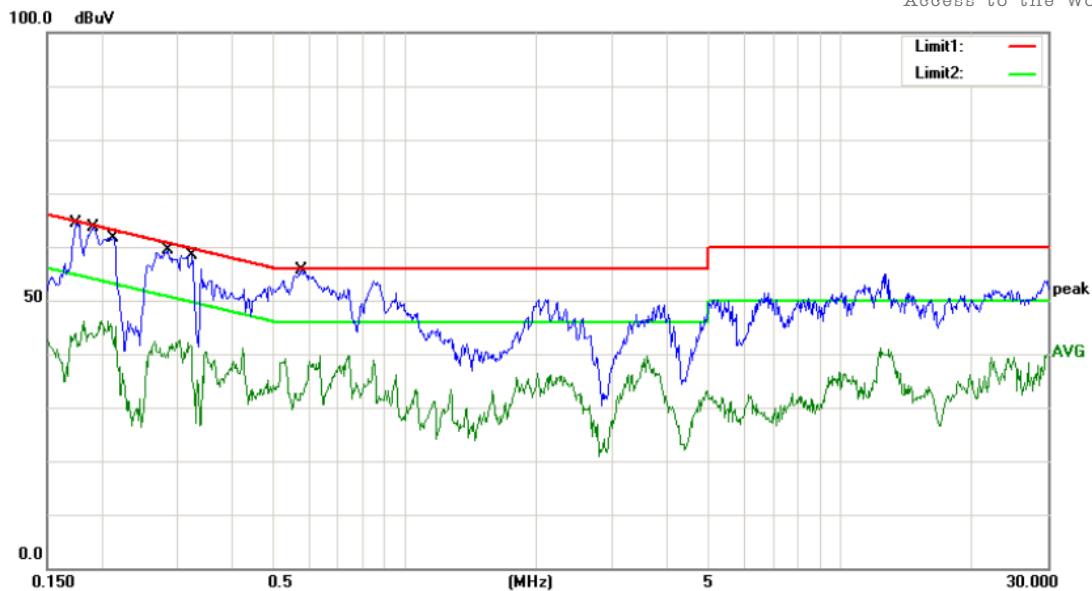

Site site #1

 Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15.207\_QP

Power: AC 120V/60Hz

Humidity: 50 %

Mode: TX

Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		Freq.	Level	Factor				
		MHz	dBuV	dB	dBuV	dB		
1		0.1740	50.20	10.08	60.28	64.77 -4.49	QP	
2		0.1740	33.50	10.08	43.58	54.77 -11.19	AVG	
3		0.1912	49.40	10.08	59.48	63.98 -4.50	QP	
4		0.1912	33.10	10.08	43.18	53.98 -10.80	AVG	
5		0.2127	47.60	10.08	57.68	63.10 -5.42	QP	
6		0.2127	32.10	10.08	42.18	53.10 -10.92	AVG	
7		0.2860	45.20	10.09	55.29	60.64 -5.35	QP	
8		0.2860	29.20	10.09	39.29	50.64 -11.35	AVG	
9		0.3234	44.30	10.09	54.39	59.62 -5.23	QP	
10		0.3234	25.90	10.09	35.99	49.62 -13.63	AVG	
11	*	0.5780	41.60	10.07	51.67	56.00 -4.33	QP	
12		0.5780	22.50	10.07	32.57	46.00 -13.43	AVG	

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

Pass.

The EUT has 1 PCB Antenna: The PCB Antenna Gain is 0.58 dBi;

Note:  Antenna use a permanently attached antenna which is not replaceable.  
 Not using a standard antenna jack or electrical connector for antenna replacement  
 The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

\*\*\* End of Report \*\*\*

# 声 明

## Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效；

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.