

FCC TEST REPORT

Client Name : Jye Wang Enterprise Co.,Ltd.
Address : 7F.-6, No.20, Wu Chuan 2nd Rd., Hsin-Chuang Dist.,
New Taipei City 24892, Taiwan (R.O.C.)
Product Name : Wireless Keyboard
Date : Apr. 02, 2022



Shenzhen Anbotech Compliance Laboratory Limited

* Approved *



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	10
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Maximum Peak Output Power Test.....	25
5.1. Test Standard and Limit.....	25
5.2. Test Setup.....	25
5.3. Test Procedure.....	25
5.4. Test Data.....	25
6. 20DB Occupy Bandwidth Test.....	26
6.1. Test Standard.....	26
6.2. Test Setup.....	26
6.3. Test Procedure.....	26
6.4. Test Data.....	26
7. Carrier Frequency Separation Test.....	27
7.1. Test Standard and Limit.....	27
7.2. Test Setup.....	27
7.3. Test Procedure.....	27
7.4. Test Data.....	27
8. Number of Hopping Channel Test.....	28
8.1. Test Standard and Limit.....	28



8.2. Test Setup.....	28
8.3. Test Procedure.....	28
8.4. Test Data.....	28
9. Dwell Time Test.....	29
9.1. Test Standard and Limit.....	29
9.2. Test Setup.....	29
9.3. Test Procedure.....	29
9.4. Test Data.....	29
10. 100kHz Bandwidth of Frequency Band Edge Requirement.....	30
10.1. Test Standard and Limit.....	30
10.2. Test Setup.....	30
10.3. Test Procedure.....	30
10.4. Test Data.....	30
11. Antenna Requirement.....	31
11.1. Test Standard and Requirement.....	31
11.2. Antenna Connected Construction.....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	34
APPENDIX III -- INTERNAL PHOTOGRAPH.....	38
APPENDIX IV -- Appendix Test Data.....	41



TEST REPORT

Applicant : Jye Wang Enterprise Co.,Ltd.
Manufacturer : Dongguan You Hong Plastic and Electrics Co., LTD
Product Name : Wireless Keyboard
Model No. : RF425F
Trade Mark : POWZAN / B.FRIENDIT
Rating(s) : Input: DC 5V, 1A(with DC 3.7V, 1500mAh battery inside)

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of receipt

Mar. 24, 2022

Date of Test

Mar. 24~31, 2022

Prepared by

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Jye Wang Enterprise Co.,Ltd.
Address	:	7F.-6, No.20, Wu Chuan 2nd Rd., Hsin-Chuang Dist., New Taipei City 24892, Taiwan (R.O.C.)
Manufacturer	:	Dongguan You Hong Plastic and Electrics Co., LTD
Address	:	Zhen Hua Road, Tie Lu Keng Village, Qi Shi Town, Dong Gang City, Guang Dong
Factory	:	Dongguan You Hong Plastic and Electrics Co., LTD
Address	:	Zhen Hua Road, Tie Lu Keng Village, Qi Shi Town, Dong Gang City, Guang Dong

1.2. Description of Device (EUT)

Product Name	:	Wireless Keyboard	
Model No.	:	RF425F	
Trade Mark	:	POWZAN / B.FRIENDIT	
Test Power Supply	:	AC 120V, 60Hz for adapter/DC 3.7V Battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2408-2474MHz
		Number of Channel:	34 Channels
		Modulation Type:	FSK
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	-2 dBi (Provided by customer)
		Adapter:	N/A

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2013 Input: AC 100-240V, 0.7A, 50-60Hz Output: 3.6-5.5V---3A/ 6.5-9V---2A/ 9-12V---1.5A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH17
Mode 3	CH34

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH17
Mode 3	CH34

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH17
Mode 3	CH34

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

1.5. List of channels



Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2408	10	2426	19	2444	28	2462
2	2410	11	2428	20	2446	29	2464
3	2412	12	2430	21	2448	30	2466
4	2414	13	2432	22	2450	31	2468
5	2416	14	2434	23	2452	32	2470
6	2418	15	2436	24	2454	33	2472
7	2420	16	2438	25	2456	34	2474
8	2422	17	2440	26	2458		
9	2424	18	2442	27	2460		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.



1.6. Description Of Test Setup

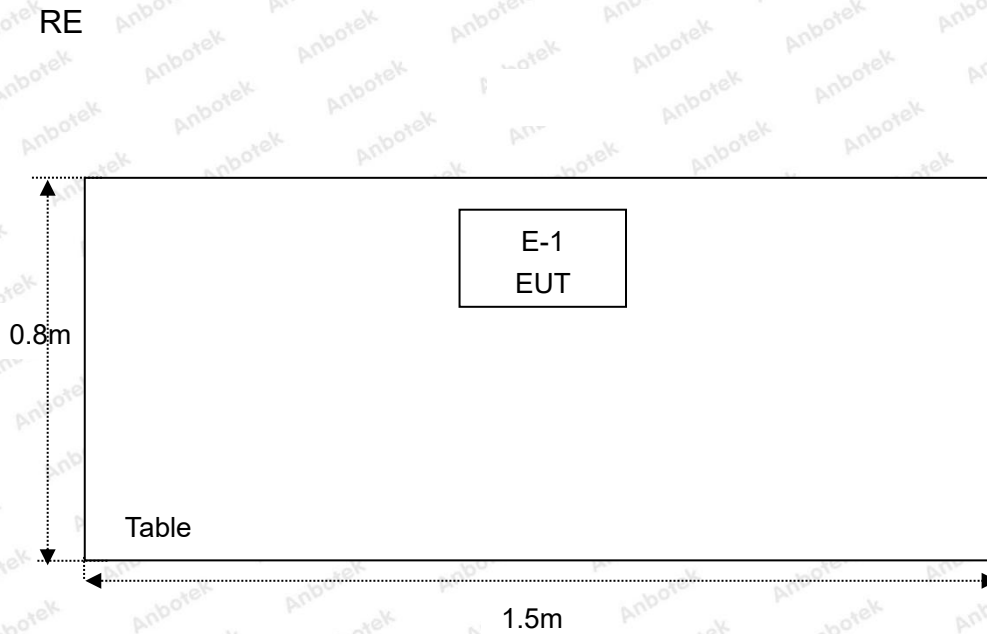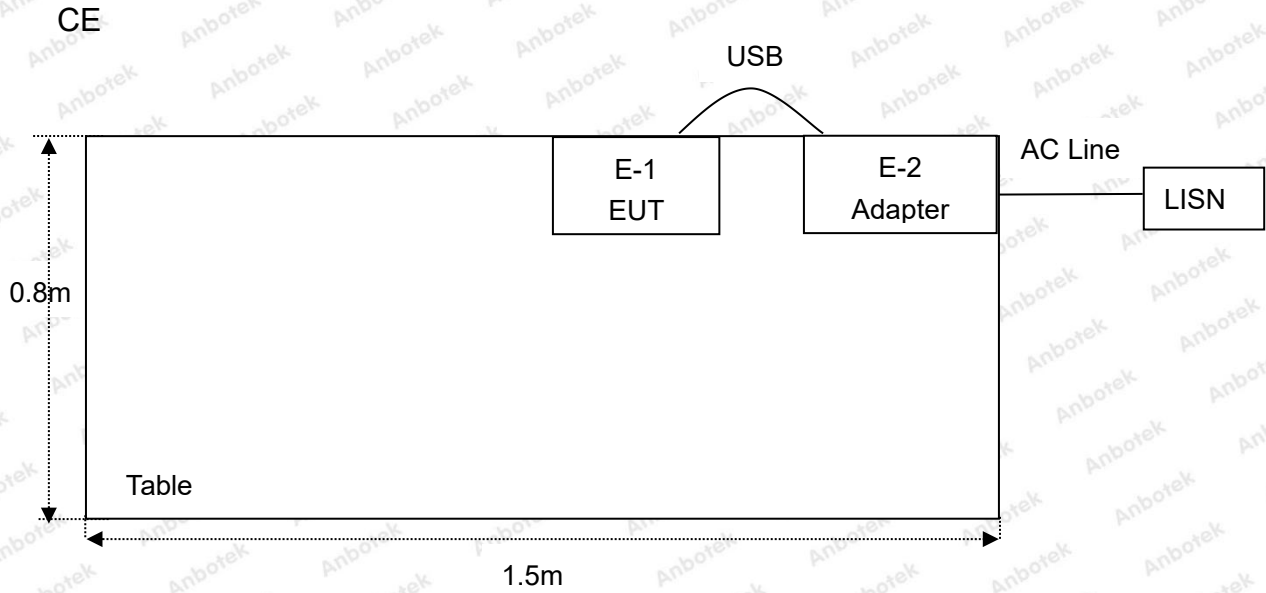

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results


Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

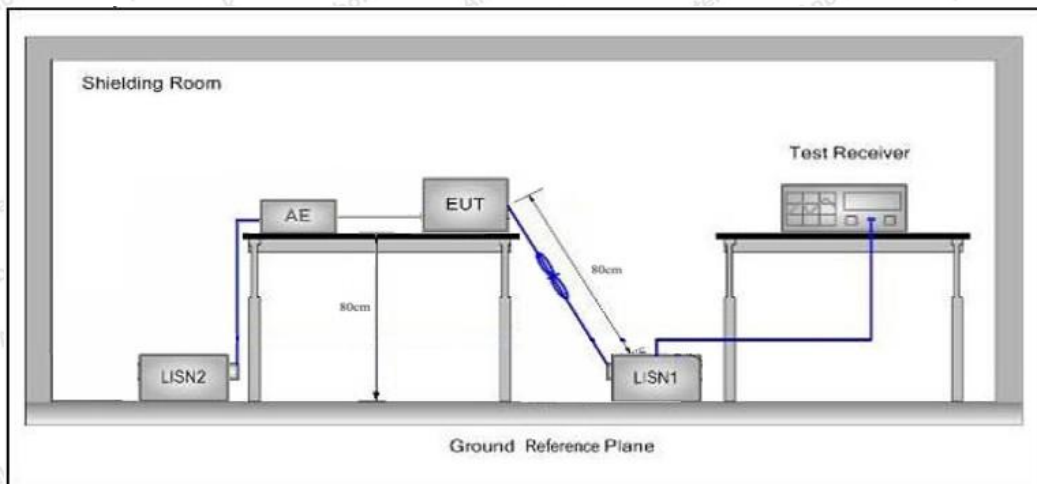

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all the modes, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 22.8°C Hum.: 51%

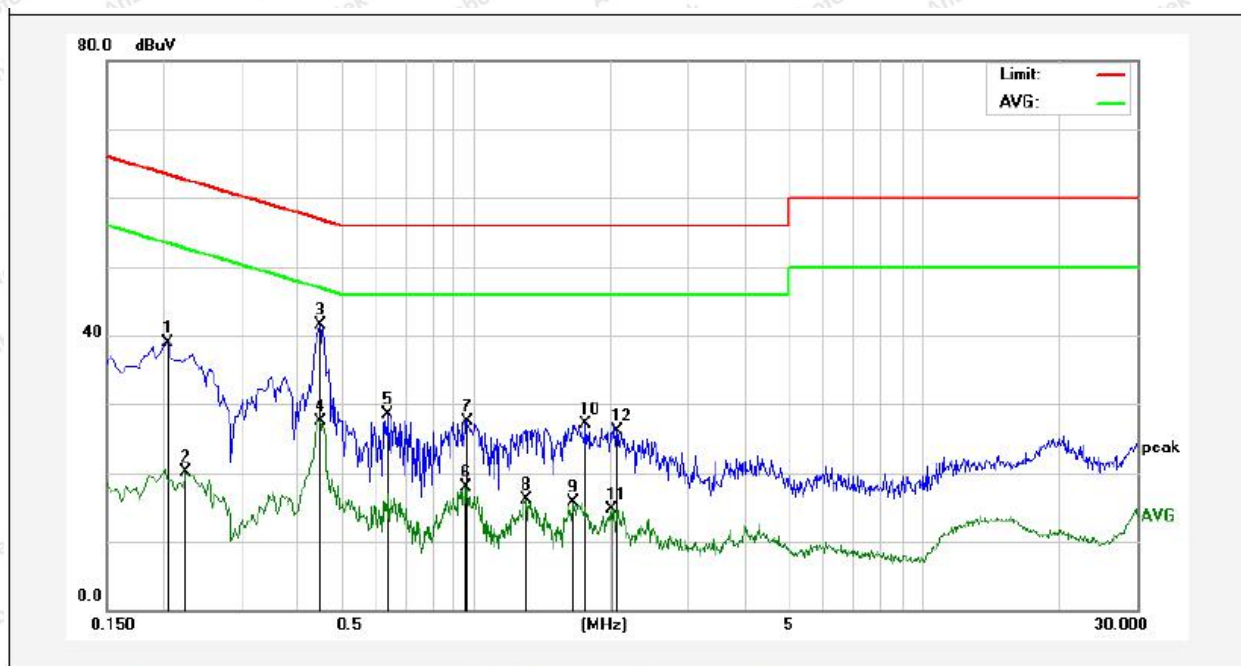

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2060	38.71	0.12	38.83	63.36	-24.53	QP	
2	0.2260	19.92	0.12	20.04	52.59	-32.55	AVG	
3	0.4500	41.45	0.13	41.58	56.87	-15.29	QP	
4	0.4500	27.46	0.13	27.59	46.87	-19.28	AVG	
5	0.6380	28.34	0.15	28.49	56.00	-27.51	QP	
6	0.9540	17.66	0.15	17.81	46.00	-28.19	AVG	
7	0.9620	27.41	0.15	27.56	56.00	-28.44	QP	
8	1.3020	16.06	0.14	16.20	46.00	-29.80	AVG	
9	1.6580	15.62	0.13	15.75	46.00	-30.25	AVG	
10	1.7660	27.00	0.13	27.13	56.00	-28.87	QP	
11	2.0220	14.64	0.12	14.76	46.00	-31.24	AVG	
12	2.0740	25.91	0.12	26.03	56.00	-29.97	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.8℃ Hum.: 51%

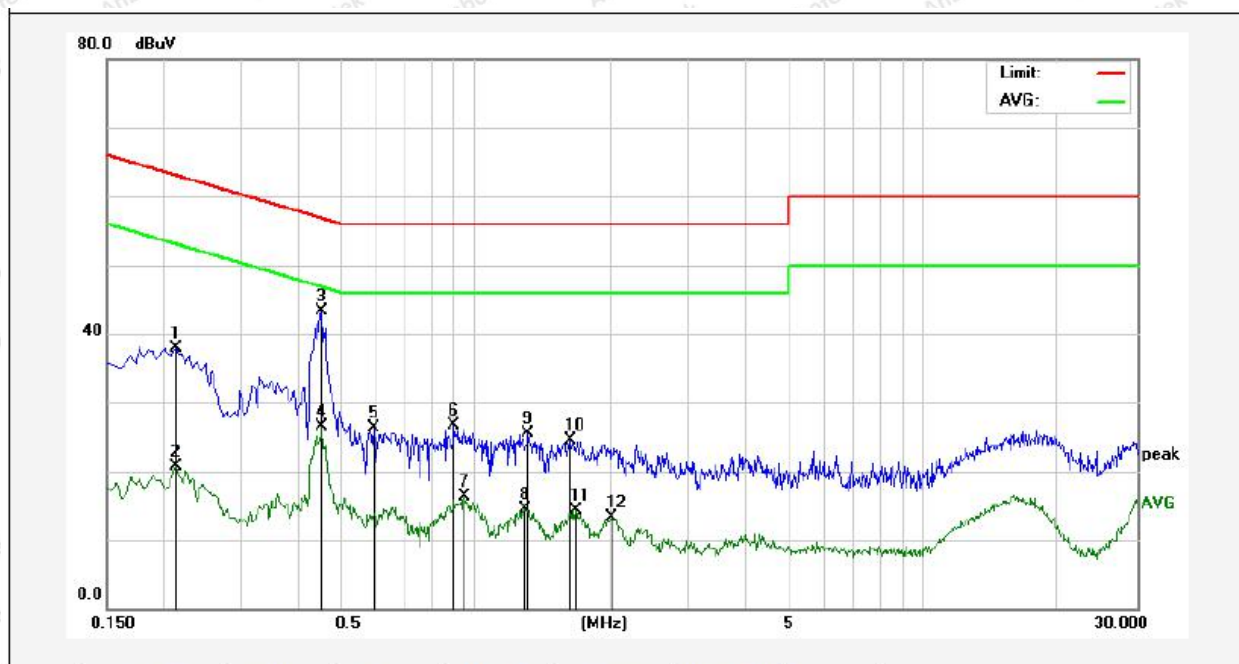

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2140	37.73	0.12	37.85	63.04	-25.19	QP	
2	0.2140	20.67	0.12	20.79	53.04	-32.25	AVG	
3	0.4540	43.13	0.13	43.26	56.80	-13.54	QP	
4	0.4540	26.38	0.13	26.51	46.80	-20.29	AVG	
5	0.5940	26.11	0.15	26.26	56.00	-29.74	QP	
6	0.8980	26.47	0.15	26.62	56.00	-29.38	QP	
7	0.9460	16.20	0.15	16.35	46.00	-29.65	AVG	
8	1.2900	14.34	0.14	14.48	46.00	-31.52	AVG	
9	1.3099	25.42	0.14	25.56	56.00	-30.44	QP	
10	1.6340	24.30	0.13	24.43	56.00	-31.57	QP	
11	1.6780	14.11	0.13	14.24	46.00	-31.76	AVG	
12	2.0180	13.17	0.12	13.29	46.00	-32.71	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

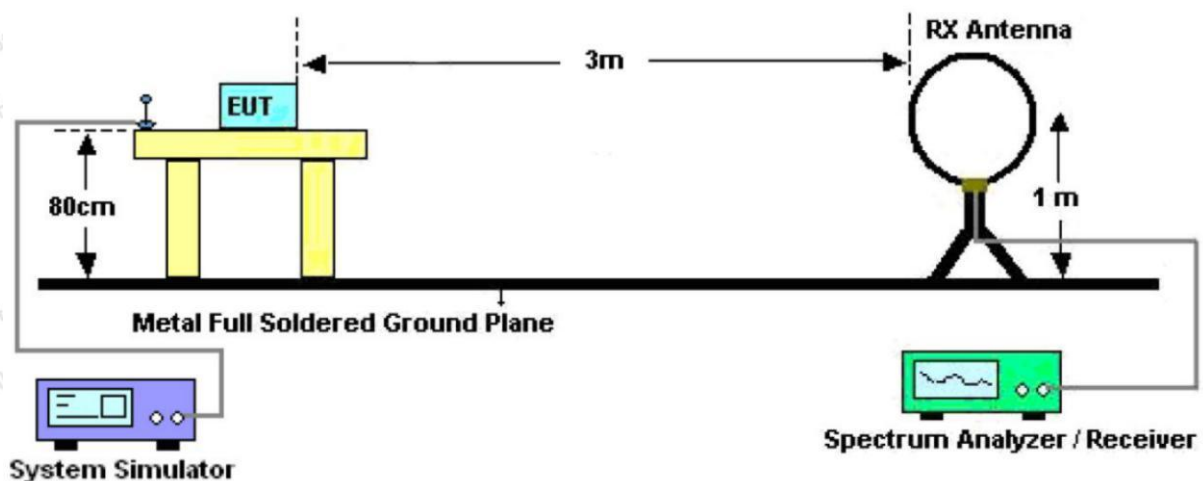


Figure 1. Below 30MHz

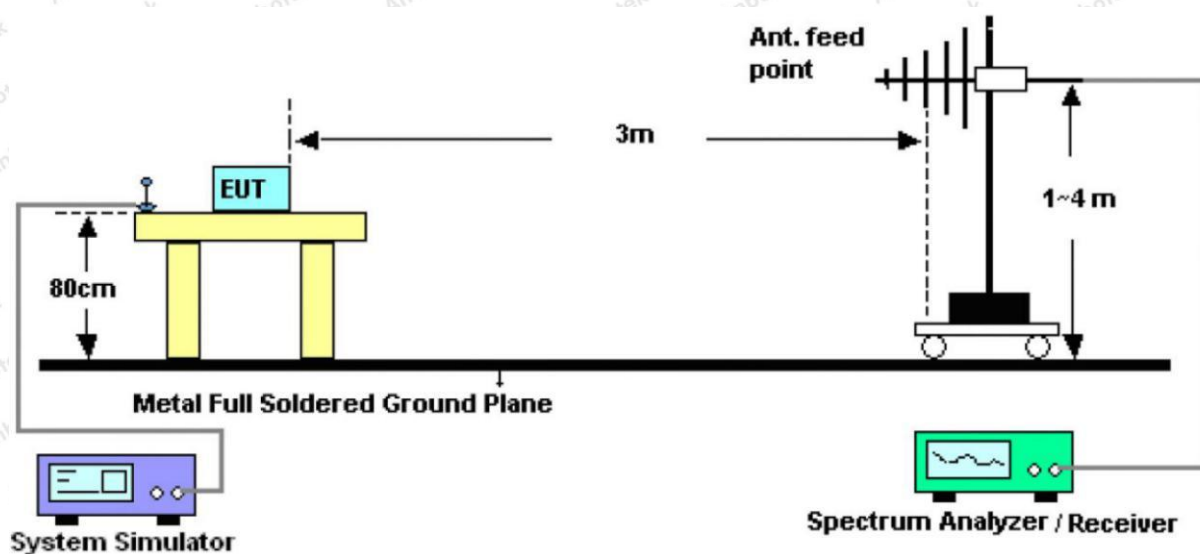


Figure 2. 30MHz to 1GHz

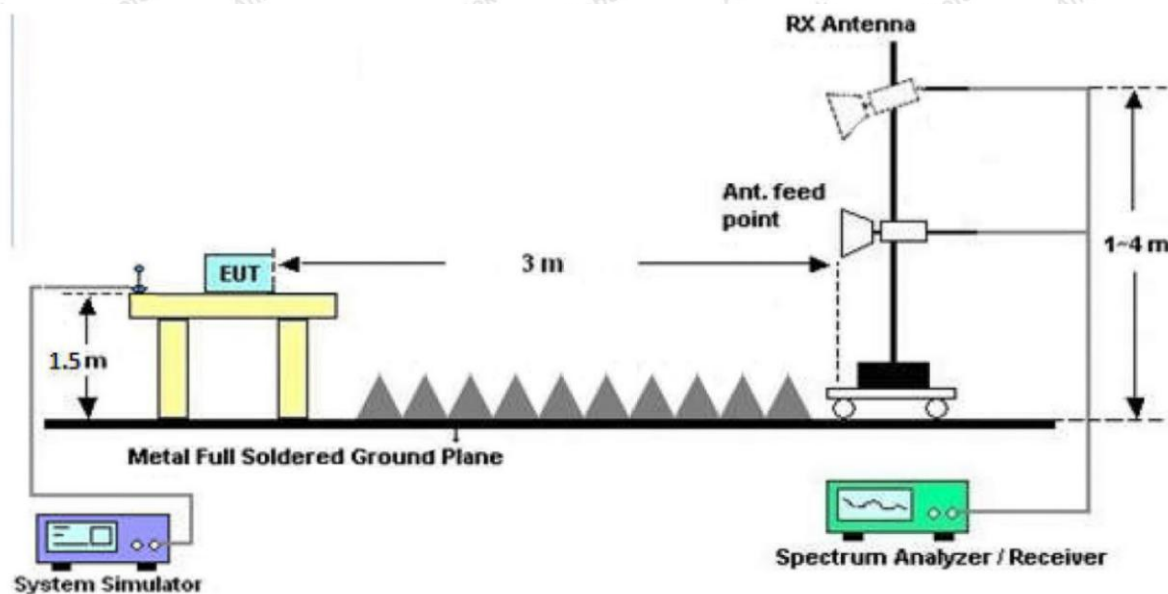


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement: use duty cycle correction factor method (DCCF)

Average level = Peak level + DCCF

4.4. Test Data

PASS


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, only the worst case is recorded in the report



Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: DC 3.7V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.5°C/47%RH

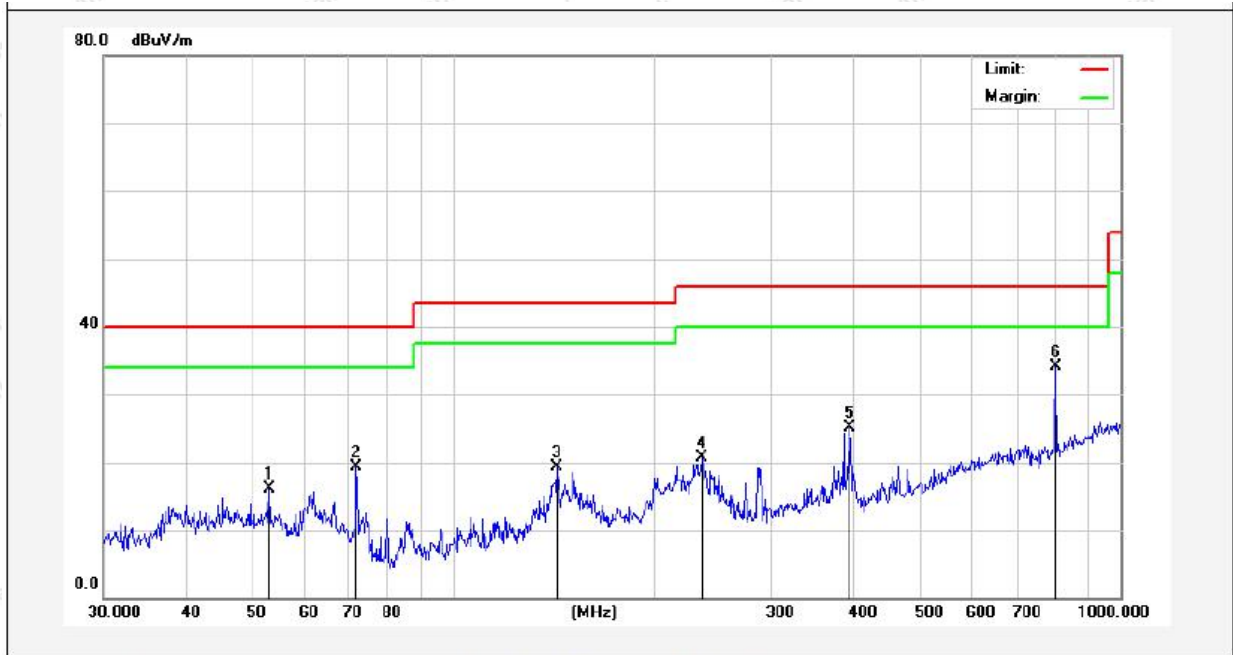

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.1313	33.13	-16.93	16.20	40.00	-23.80	QP			
2	71.8320	39.23	-19.94	19.29	40.00	-20.71	QP			
3	143.3261	41.38	-22.16	19.22	43.50	-24.28	QP			
4	236.6447	39.03	-18.39	20.64	46.00	-25.36	QP			
5	393.4723	39.52	-14.51	25.01	46.00	-20.99	QP			
6	798.9797	42.39	-8.27	34.12	46.00	-11.88	QP			



Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: DC 3.7V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.5°C/47%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	31.87	-17.22	14.65	40.00	-25.35	QP			
2	71.8320	41.12	-22.16	18.96	40.00	-21.04	QP			
3	155.9101	44.20	-23.54	20.66	43.50	-22.84	QP			
4	233.3487	52.35	-21.77	30.58	46.00	-15.42	QP			
5	382.5879	41.65	-16.09	25.56	46.00	-20.44	QP			
6	801.7863	38.92	-8.24	30.68	46.00	-15.32	QP			

Test Results (1GHz-25GHz)

Test channel: Lowest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4816.00	28.29	15.30	43.59	74.00	-30.41	Vertical
7224.00	29.26	18.08	47.34	74.00	-26.66	Vertical
9632.00	30.46	23.77	54.23	74.00	-19.77	Vertical
9632.00	*			74.00		Vertical
12040.00	*			74.00		Vertical
4816.00	28.57	15.30	43.87	74.00	-30.13	Horizontal
7224.00	29.84	18.08	47.92	74.00	-26.08	Horizontal
9632.00	28.71	23.77	52.48	74.00	-21.52	Horizontal
9632.00	*			74.00		Horizontal
12040.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4816.00	17.67	15.30	32.97	54.00	-21.03	Vertical
7224.00	18.29	18.08	36.37	54.00	-17.63	Vertical
9632.00	19.48	23.77	43.25	54.00	-10.75	Vertical
9632.00	*			54.00		Vertical
12040.00	*			54.00		Vertical
4816.00	16.92	15.30	32.22	54.00	-21.78	Horizontal
7224.00	18.90	18.08	36.98	54.00	-17.02	Horizontal
9632.00	18.02	23.77	41.79	54.00	-12.21	Horizontal
9632.00	*			54.00		Horizontal
12040.00	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test channel: Middle

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	28.31	15.42	43.73	74.00	-30.27	Vertical
7320.00	29.11	18.02	47.13	74.00	-26.87	Vertical
9760.00	29.47	23.80	53.27	74.00	-20.73	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	28.27	15.42	43.69	74.00	-30.31	Horizontal
7320.00	29.83	18.02	47.85	74.00	-26.15	Horizontal
9760.00	28.41	23.80	52.21	74.00	-21.79	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	17.40	15.42	32.82	54.00	-21.18	Vertical
7320.00	18.39	18.02	36.41	54.00	-17.59	Vertical
9760.00	19.34	23.80	43.14	54.00	-10.86	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	16.83	15.42	32.25	54.00	-21.75	Horizontal
7320.00	18.46	18.02	36.48	54.00	-17.52	Horizontal
9760.00	18.53	23.80	42.33	54.00	-11.67	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Highest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4948.00	28.58	15.56	44.14	74.00	-29.86	Vertical
7422.00	29.12	17.95	47.07	74.00	-26.93	Vertical
9896.00	30.02	23.83	53.85	74.00	-20.15	Vertical
9896.00	*			74.00		Vertical
12370.00	*			74.00		Vertical
4948.00	28.34	15.56	43.90	74.00	-30.10	Horizontal
7422.00	29.86	17.95	47.81	74.00	-26.19	Horizontal
9896.00	29.09	23.83	52.92	74.00	-21.08	Horizontal
9896.00	*			74.00		Horizontal
12370.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4948.00	18.52	15.56	34.08	54.00	-19.92	Vertical
7422.00	19.40	17.95	37.35	54.00	-16.65	Vertical
9896.00	19.89	23.83	43.72	54.00	-10.28	Vertical
9896.00	*			54.00		Vertical
12370.00	*			54.00		Vertical
4948.00	18.27	15.56	33.83	54.00	-20.17	Horizontal
7422.00	19.83	17.95	37.78	54.00	-16.22	Horizontal
9896.00	18.43	23.83	42.26	54.00	-11.74	Horizontal
9896.00	*			54.00		Horizontal
12370.00	*			54.00		Horizontal


Remark:


1. Result = Reading + Factor

2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

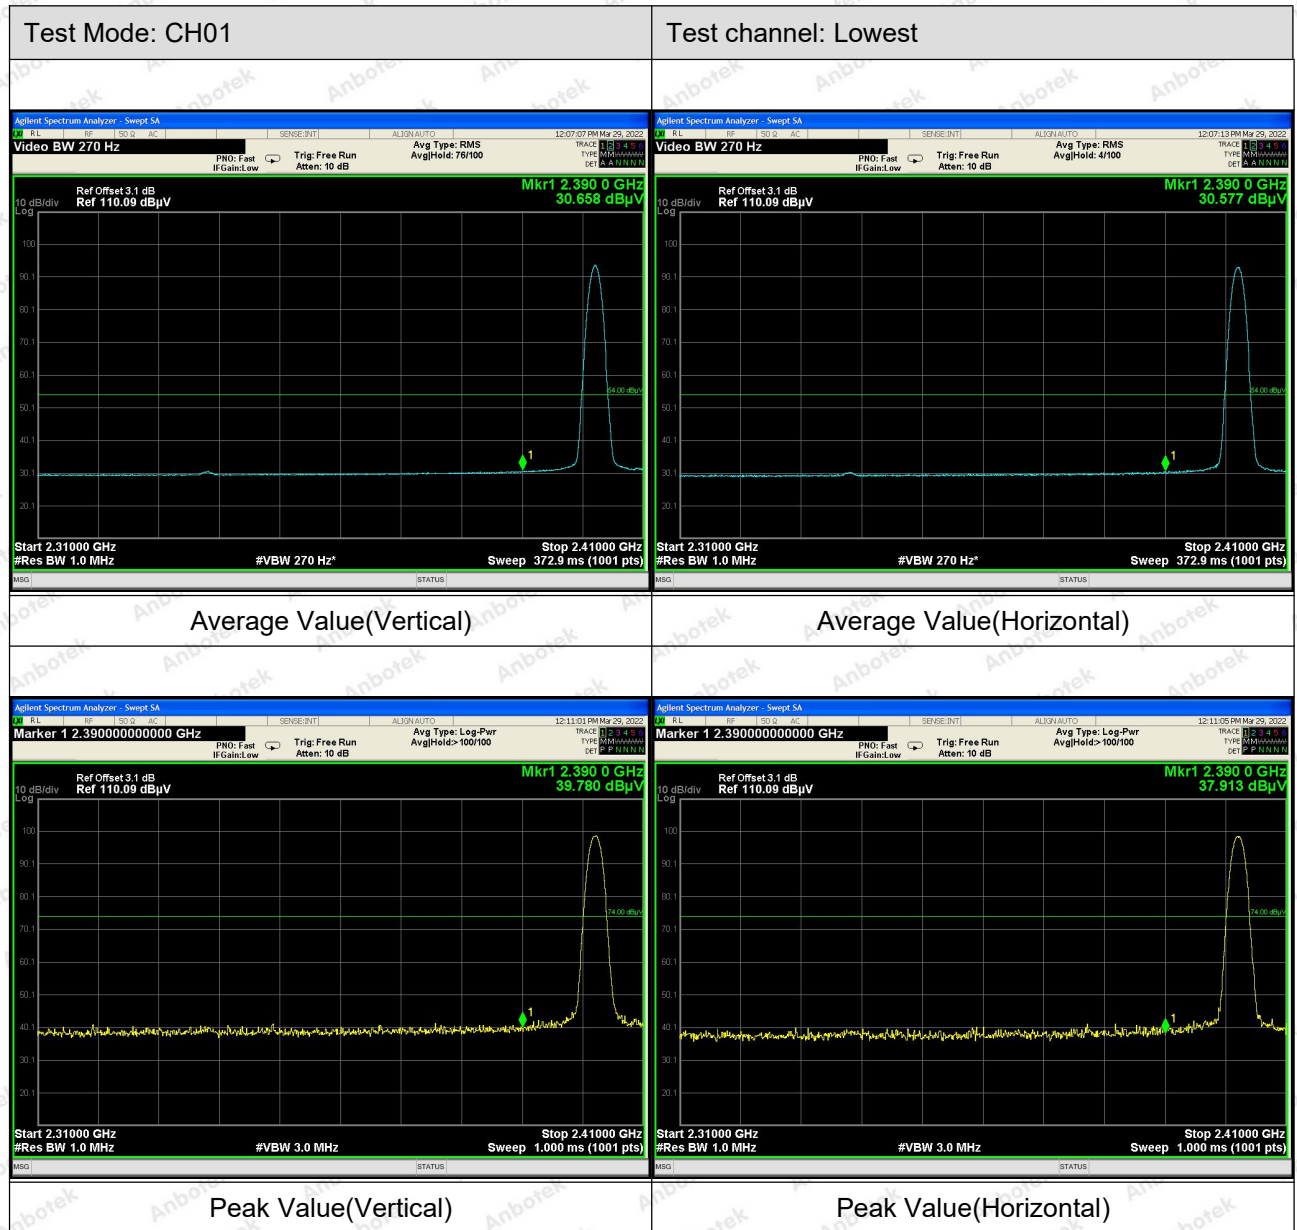

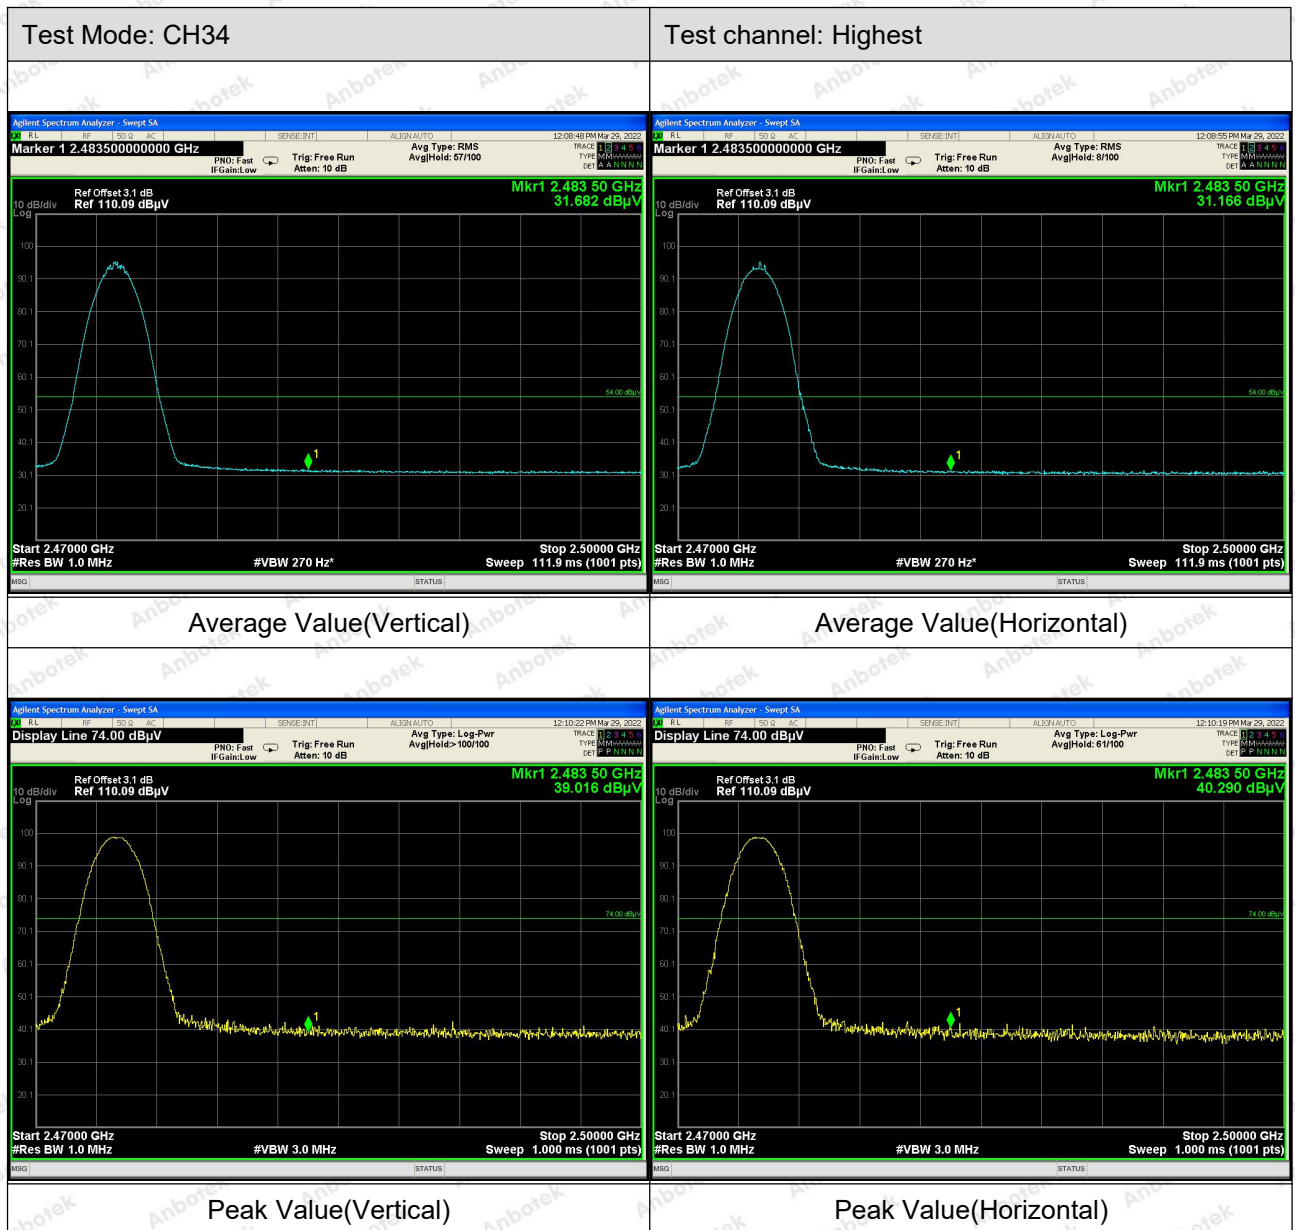

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	According to §15.247(b) (1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.2. Test Setup



5.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.



6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW $\geq 1\%$ of the 20 dB bandwidth.
3. Set the VBW $\geq$ RBW
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data

Pass


Please refer to Appendix A of the Appendix Test Data.

7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Pass


Please refer to Appendix D of the Appendix Test Data.

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.



9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.



10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data

Pass

Please refer to Appendix G & Appendix H of the Appendix Test Data.

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction


The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is -2 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiation Emission Test

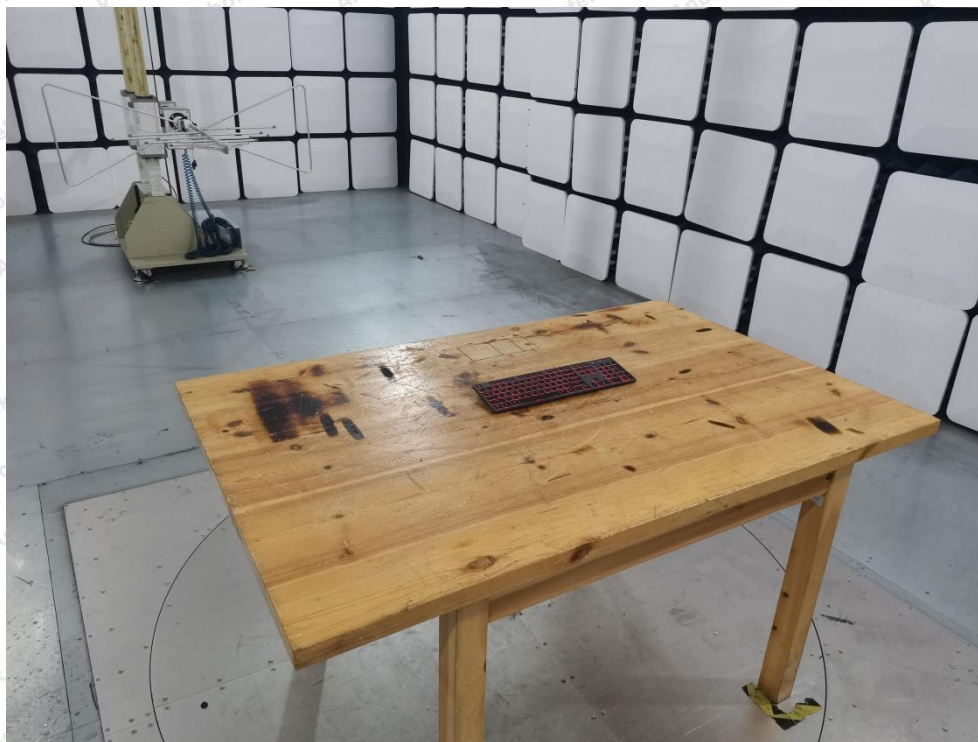



APPENDIX II -- EXTERNAL PHOTOGRAPH

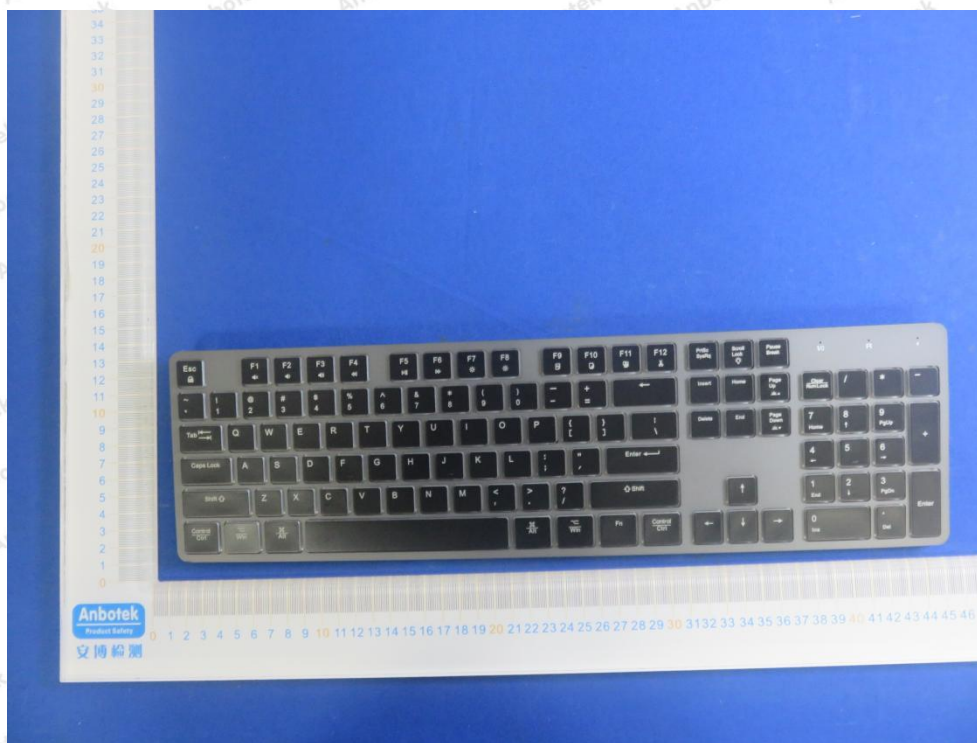
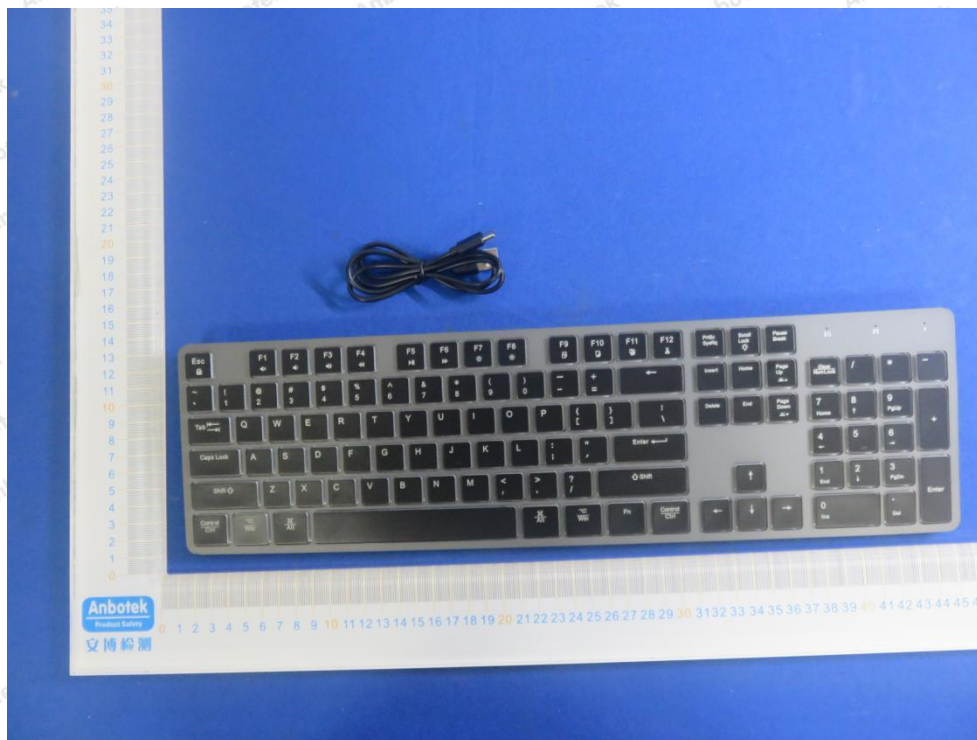











APPENDIX III -- INTERNAL PHOTOGRAPH

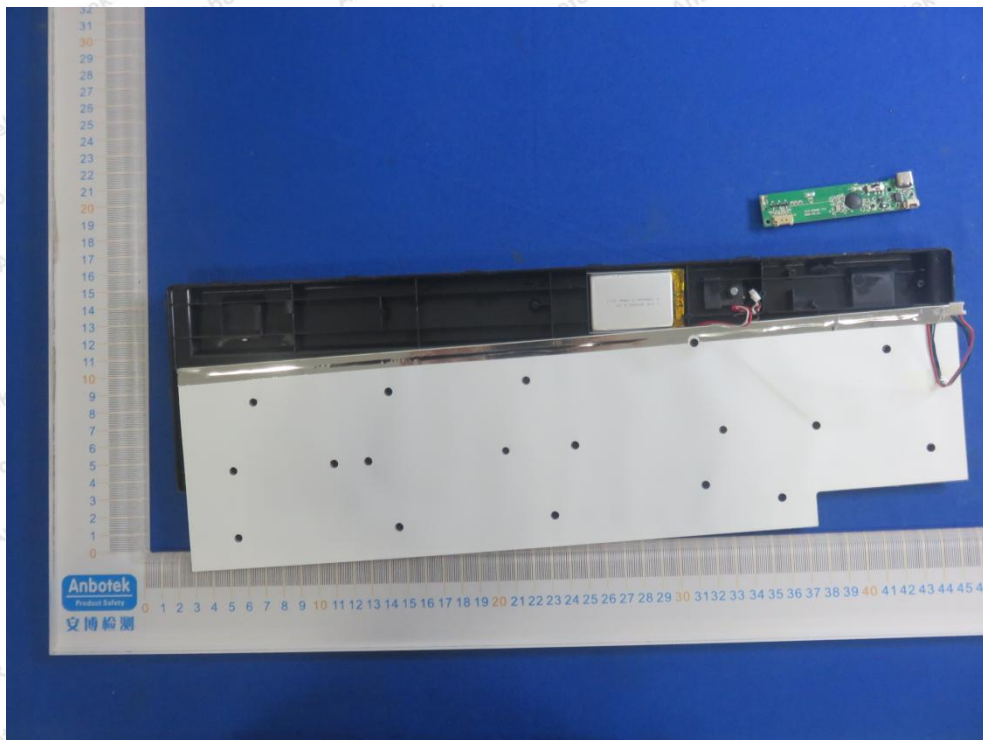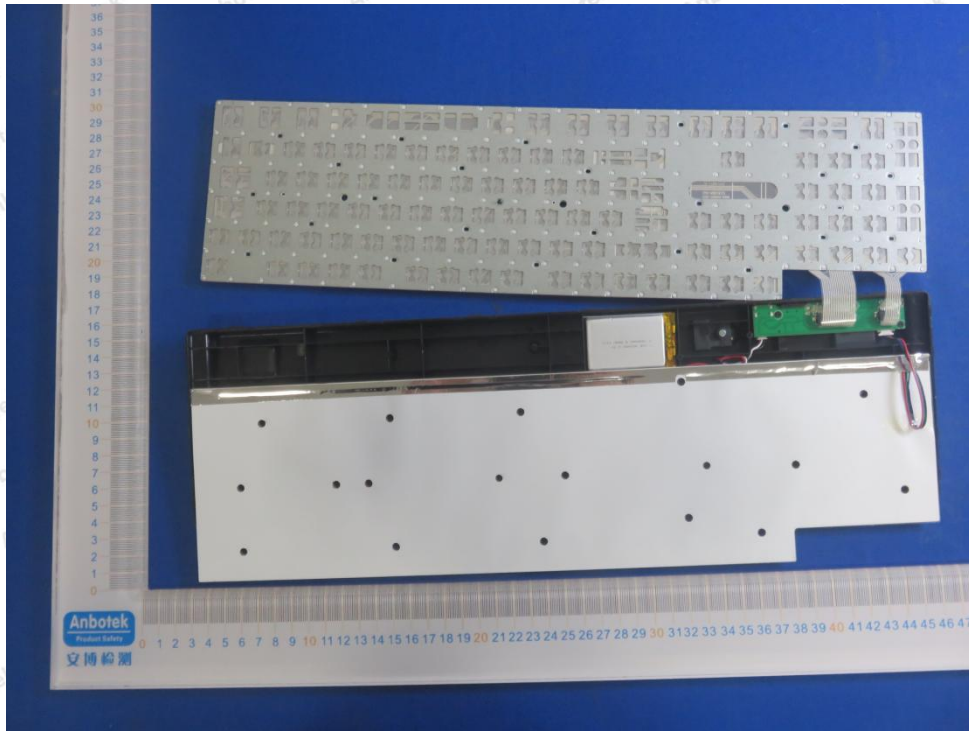

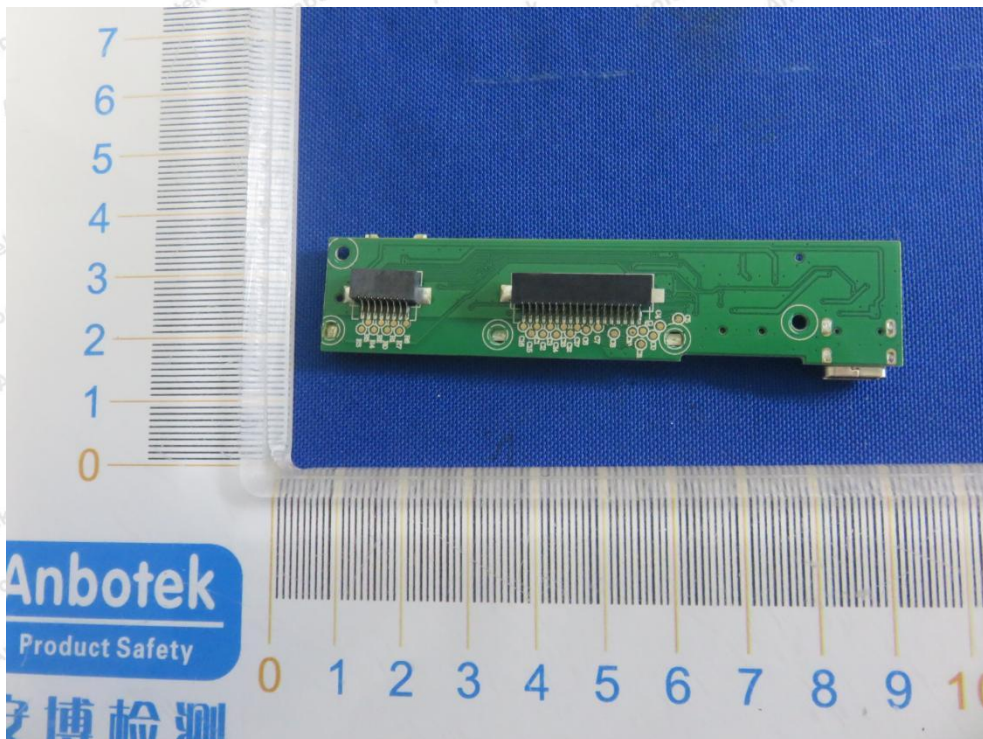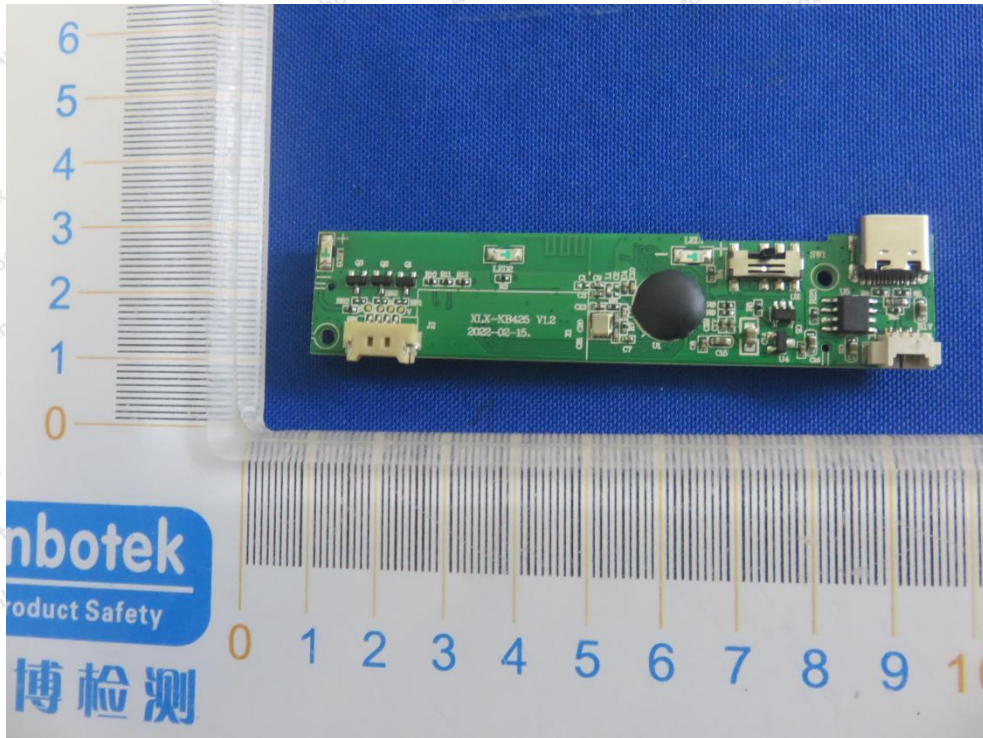

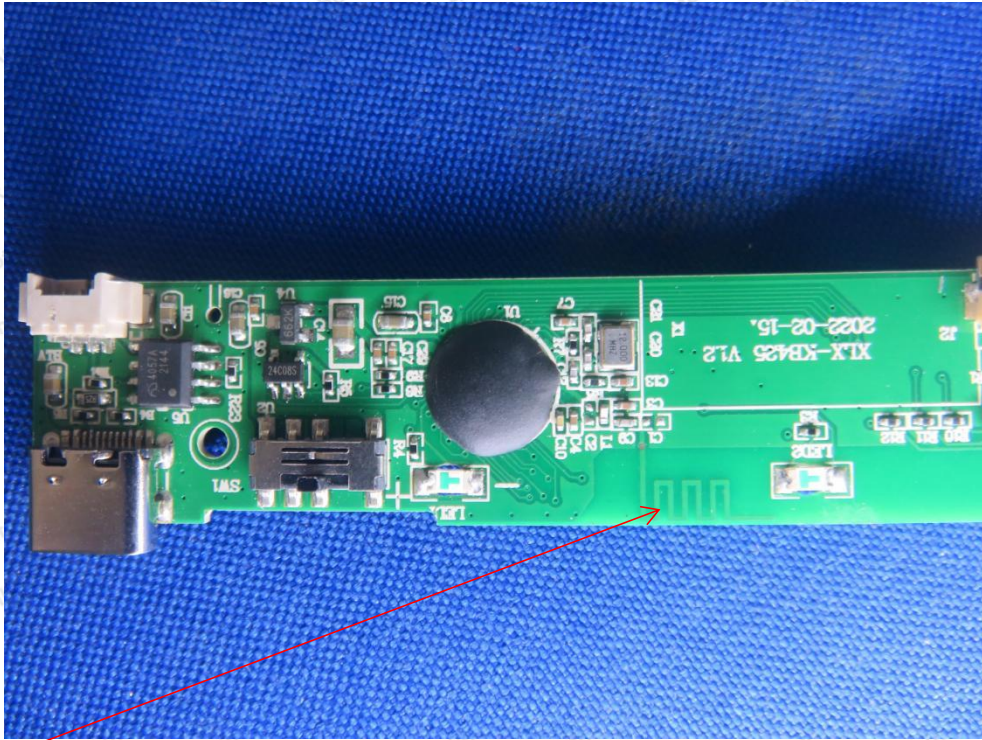

ANT



APPENDIX IV – Appendix Test Data

