



FCC TEST REPORT

FCC ID: 2AXCUMOMENTM

Product	:	Sport DV
Model Name	:	Moment 5M
Additional Model Number	:	DB32S Brave 1
Brand	:	N/A
Report No.	:	PTC20080705201E-FC01
Prepared for		
DeBen Technology (shenzhen) Co.,Ltd		
5th Floor, 12 Buildings, Xinxintian Industrial Zone, Xinsha Road, Shaer Community, Shajing Street, Baoan District, Shenzhen 518101		
Prepared by		
Precise Testing & Certification (Guangdong) Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.		



1 TEST RESULT CERTIFICATION

Applicant's name : DeBen Technology (shenzhen) Co.,Ltd
Address : 5th Floor, 12 Buildings, Xinxintian Industrial Zone, Xinsha Road, Shaer Community, Shajing Street, Baoan District, Shenzhen 518101
Manufacture's name : DeBen Technology (shenzhen) Co.,Ltd
Address : 5th Floor, 12 Buildings, Xinxintian Industrial Zone, Xinsha Road, Shaer Community, Shajing Street, Baoan District, Shenzhen 518101
Product name : Sport DV
Model name : Moment 5M
Additional Model Number : DB32S Brave 1
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Sept. 1 , 2020 ~ Sept. 7, 2020
Date of Issue : Sept. 8, 2020
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang'.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read 'Chris Du'.

Chris Du / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST.....	7
3.3 TEST SITE.....	11
4 EQUIPMENT DURING TEST.....	12
4.1 EQUIPMENTS LIST.....	12
4.2 MEASUREMENT UNCERTAINTY.....	14
4.3 DESCRIPTION OF SUPPORT UNITS.....	15
5 CONDUCTED EMISSION.....	16
5.1 E.U.T. OPERATION.....	16
5.2 EUT SETUP.....	16
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
5.4 MEASUREMENT PROCEDURE.....	17
5.5 CONDUCTED EMISSION LIMIT.....	17
5.6 MEASUREMENT DESCRIPTION.....	17
5.7 CONDUCTED EMISSION TEST RESULT.....	17
6 RADIATED SPURIOUS EMISSIONS.....	20
6.1 EUT OPERATION.....	20
6.2 TEST SETUP.....	21
6.3 SPECTRUM ANALYZER SETUP.....	22
6.4 TEST PROCEDURE.....	23
6.5 SUMMARY OF TEST RESULTS.....	24
7 CONDUCTED SPURIOUS EMISSION.....	29
7.1 TEST PROCEDURE.....	29
7.2 TEST RESULT.....	29
8 BAND EDGE MEASUREMENT.....	36
8.1 TEST PROCEDURE.....	36



8.2	TEST RESULT.....	37
9	6DB BANDWIDTH MEASUREMENT.....	41
9.1	TEST PROCEDURE.....	41
9.2	TEST RESULT.....	41
10	MAXIMUM PEAK OUTPUT POWER.....	48
10.1	TEST PROCEDURE.....	48
10.2	TEST RESULT.....	48
11	POWER SPECTRAL DENSITY.....	49
11.1	TEST PROCEDURE.....	49
11.2	TEST RESULT.....	49
12	ANTENNA APPLICATION.....	55
12.1	ANTENNA REQUIREMENT.....	55
12.2	RESULT	56



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



3 General Information

3.1 General Description of E.U.T.

Product Name	: Sport DV
Model Name	: Moment 5M
Additional Model Number	: DB32S Brave 1
Specification	: 802.11b/g/n HT20/HT40
Operation Frequency	: 2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
Number of Channel	: 11 channels for 802.11b/g/n(HT20) 7 channels for 802.11b/g/n(HT40)
Type of Modulation	: DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation	: FPC Antenna
Antenna Gain	: 0 dBi
Power supply	: DC 3.7V 1050mAh
Hardware Version	: N/A
Software Version	: N/A



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list :

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	1	--
2	2417	2	--
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	10	--
11	2462	11	--



Report No.: PTC20080705201E-FC01

3.3 Test Site

Precise Testing & Certification (Guangdong) Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	10Hz-30GHz	Sep.18, 2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Sep.18, 2020
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Sep.18, 2020
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Sep.18, 2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep.18, 2020
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Sep.18, 2020
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Sep.18, 2020
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Sep.18, 2020
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Sep.18, 2020
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Sep.18, 2020
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Sep.18, 2020
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Sep.18, 2020
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Sep.18, 2020
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Sep.18, 2020
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Sep.18, 2020
RF Cable	R&S	R204	R21X	1GHz-40GHz	Sep.18, 2020



Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep.18, 2020
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	9KHz-300MHz	Sep.18, 2020
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Sep.18, 2020



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$



Report No.: PTC20080705201E-FC01

4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	Model: XED-3C050100CC Input: AC120V, 50/60Hz, Output: DC 5V, 1A	N/A

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 25.5 °C
Humidity	: 51 % RH
Atmospheric Pressure	: 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

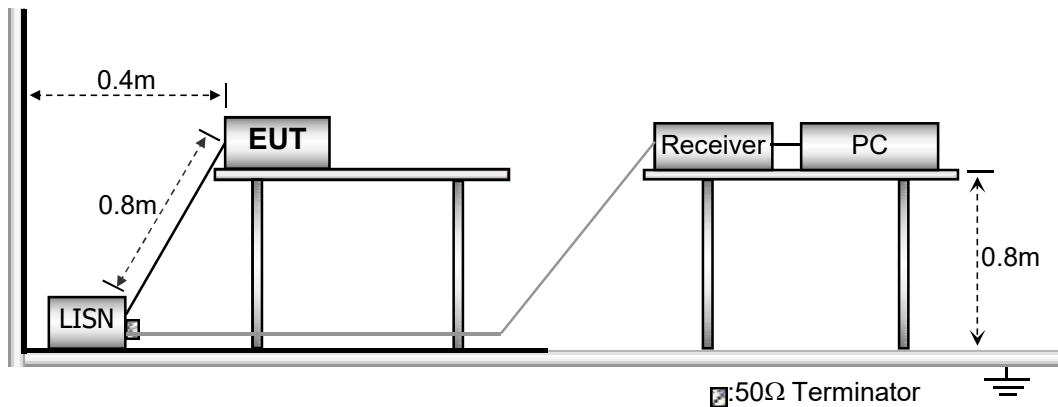

5.3 Test SET-UP (Block Diagram of Configuration)

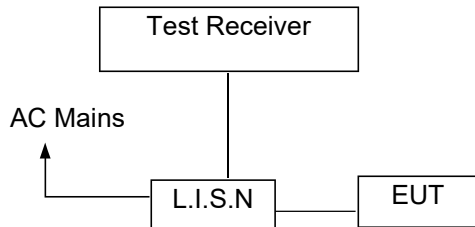

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Pass.


Please refer to the following pages.

Line-AC 120V/60Hz

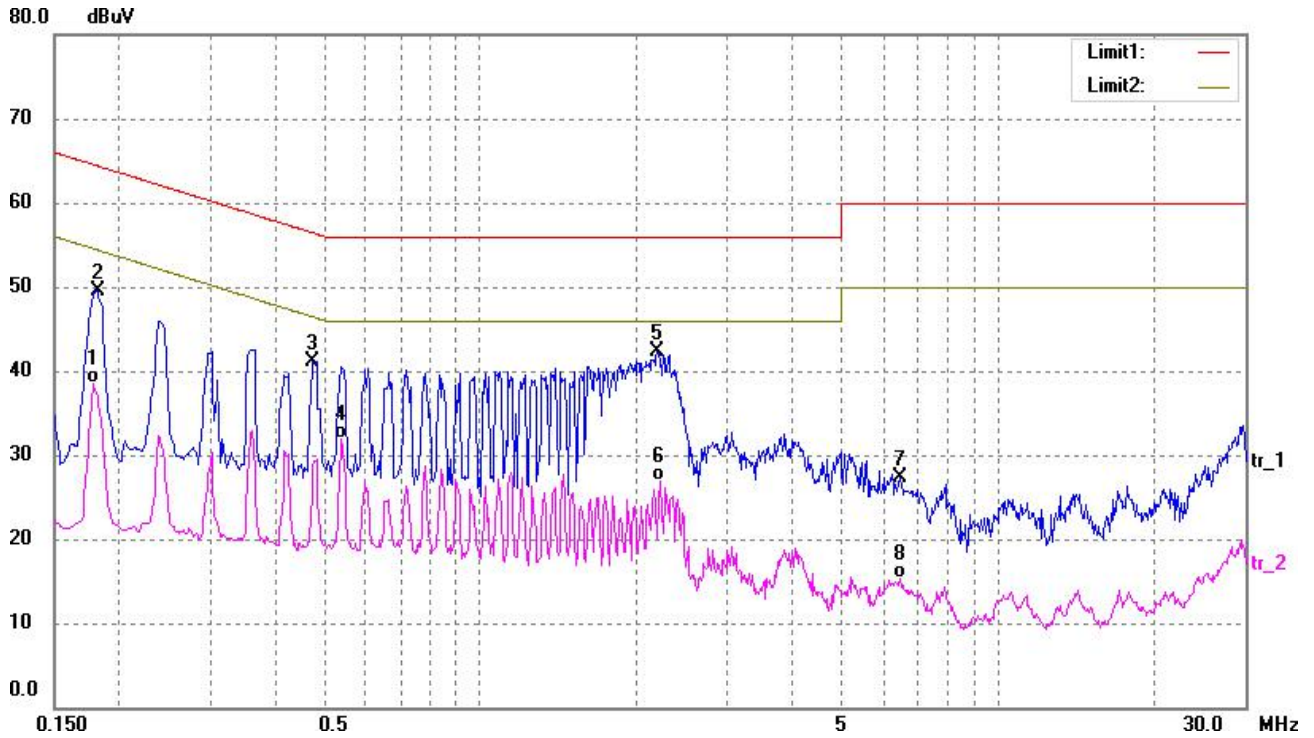

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	28.91	9.50	38.41	54.58	-16.17	AVG
2	0.1820	39.98	9.50	49.48	64.39	-14.91	peak
3	0.4740	31.56	9.50	41.06	56.44	-15.38	peak
4	0.5380	22.39	9.54	31.93	46.00	-14.07	AVG
5	2.1980	32.27	10.00	42.27	56.00	-13.73	peak
6	2.2220	16.86	10.00	26.86	46.00	-19.14	AVG
7	6.4820	17.30	10.00	27.30	60.00	-32.70	peak
8	6.4820	5.29	10.00	15.29	50.00	-34.71	AVG

Neutral-AC 120V/60Hz

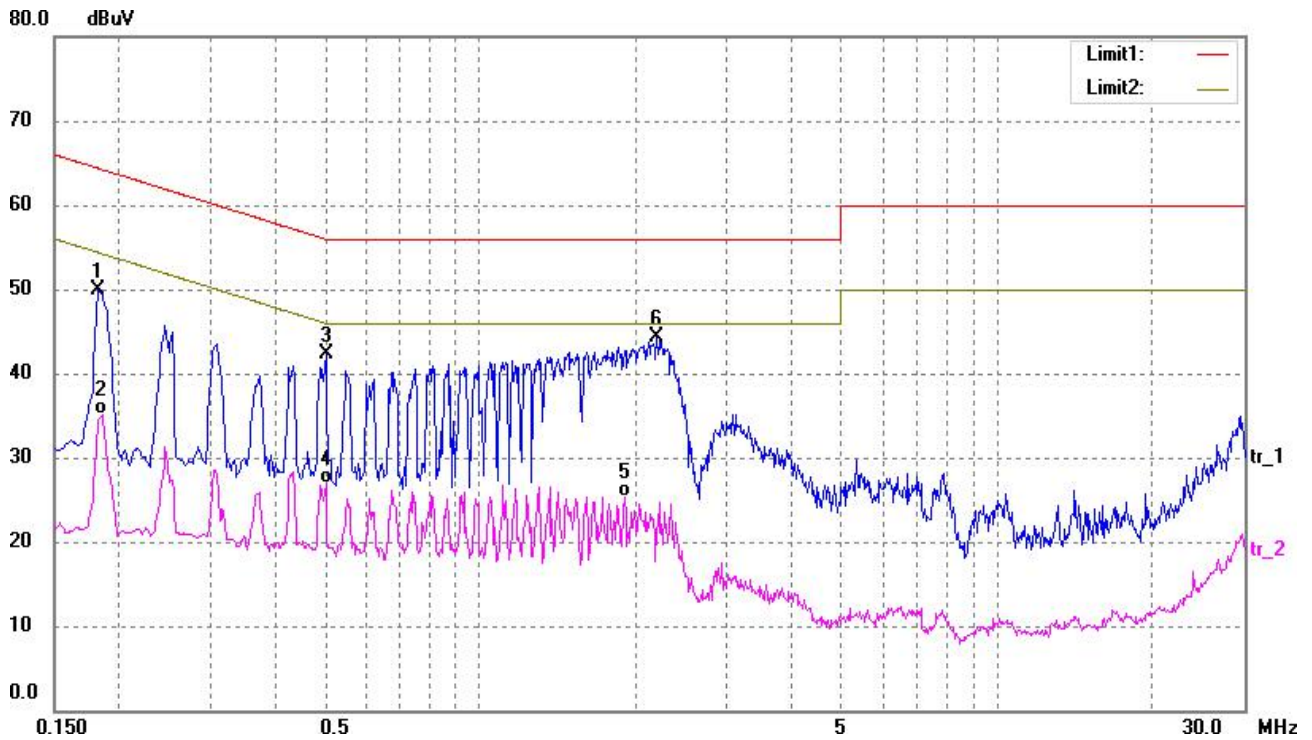

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1820	40.48	9.50	49.98	64.39	-14.41	peak
2	0.1860	25.60	9.50	35.10	54.21	-19.11	AVG
3	0.5020	32.79	9.50	42.29	56.00	-13.71	peak
4	0.5020	17.48	9.50	26.98	46.00	-19.02	AVG
5	1.9060	15.22	10.00	25.22	46.00	-20.78	AVG
6	2.1980	34.31	10.00	44.31	56.00	-11.69	peak



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

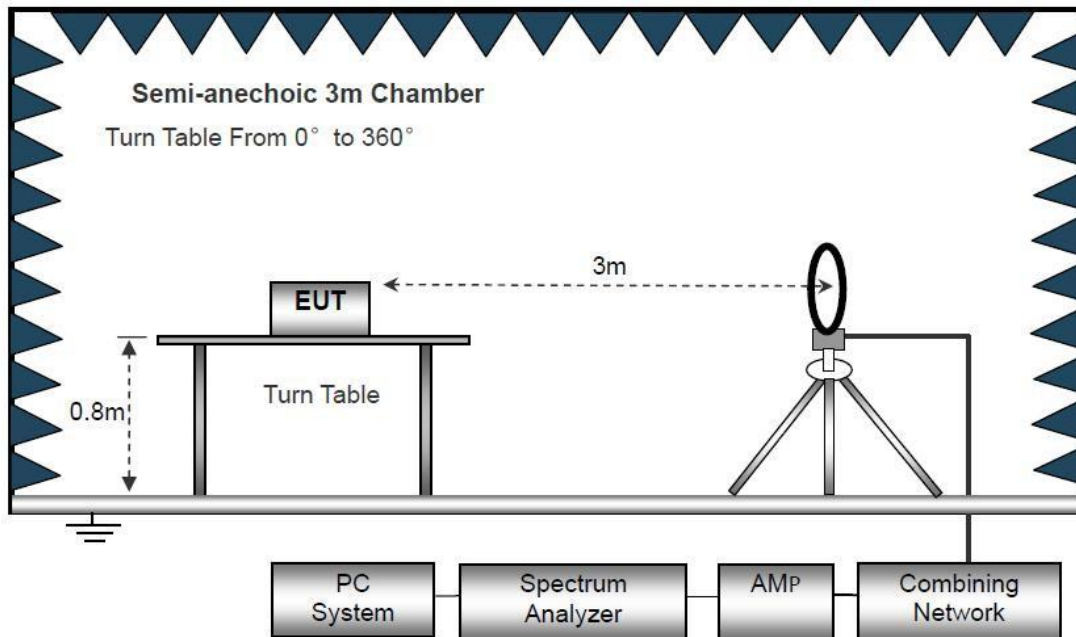

The test setup for emission measurement from 30 MHz to 1 GHz.

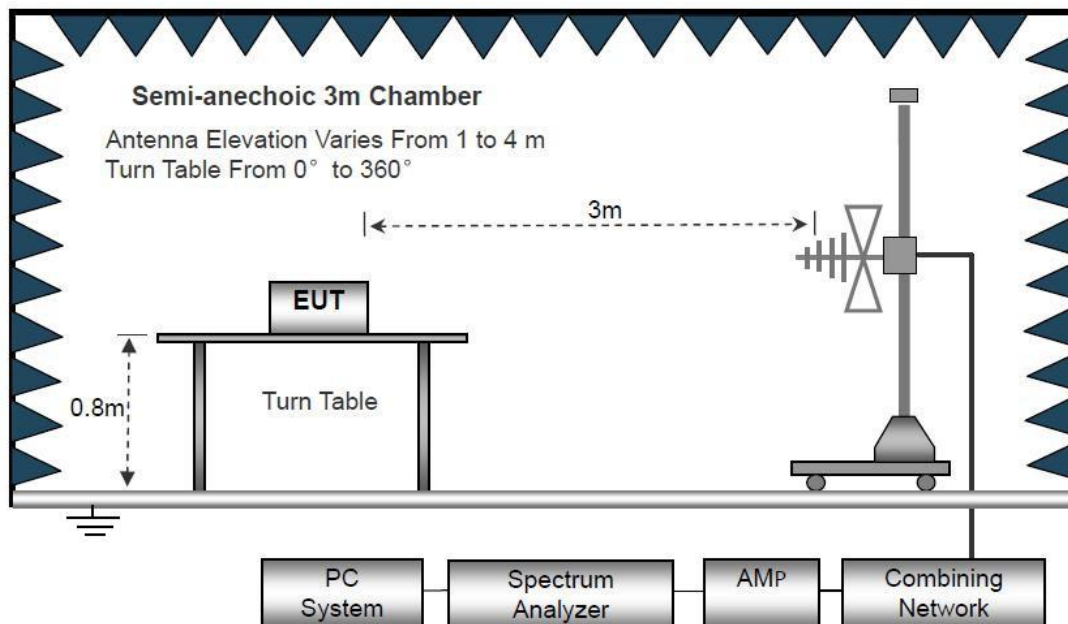

The test setup for emission measurement above 1 GHz

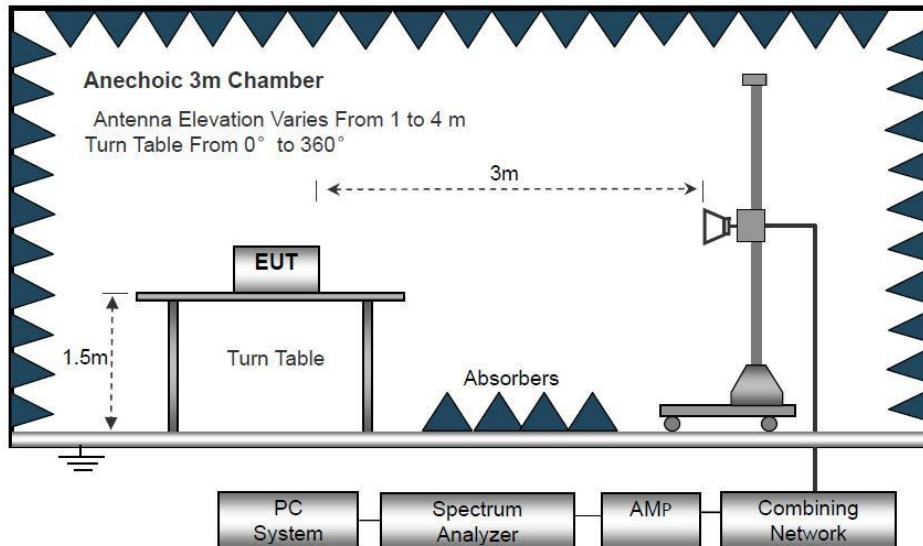

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:




Antenna Polarization: Horizontal

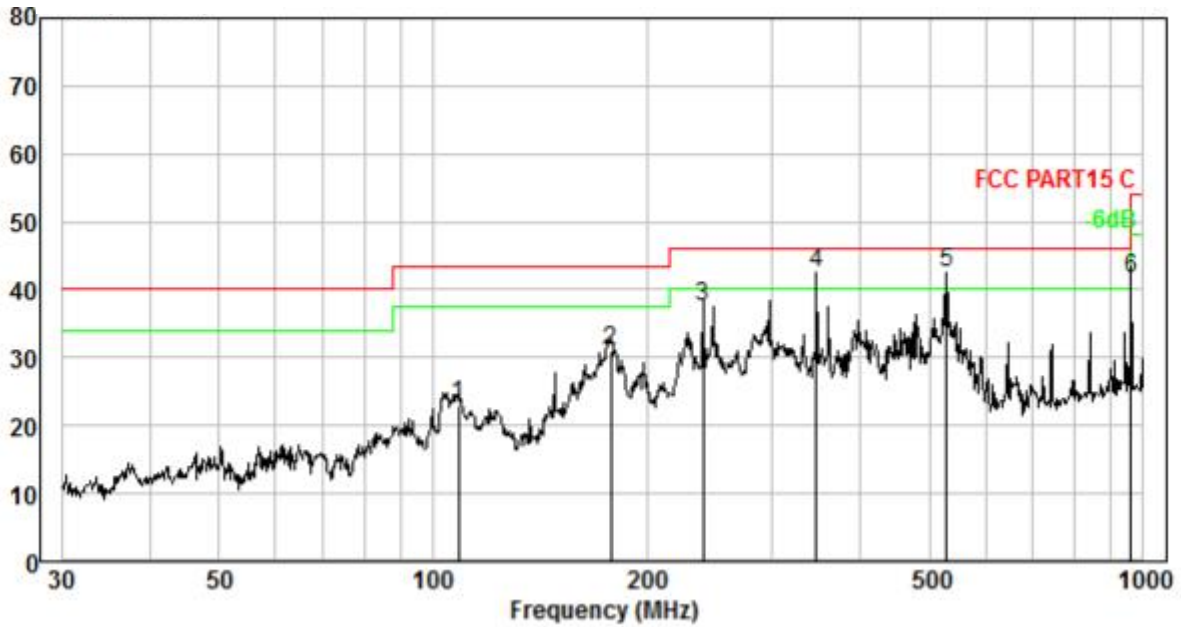

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	108.647	3.42	10.64	39.08	30.00	23.14	43.50	-20.36	QP
2.	178.133	4.26	12.64	44.00	30.03	30.87	43.50	-12.63	QP
3.	239.987	4.77	12.23	50.63	30.17	37.46	46.00	-8.54	QP
4.	346.809	5.41	14.33	53.19	30.51	42.42	46.00	-3.58	QP
5.	528.246	6.13	17.91	49.30	30.93	42.41	46.00	-3.59	QP
6.	962.162	7.16	22.50	42.93	31.05	41.54	54.00	-12.46	QP

Antenna Polarization: Vertical

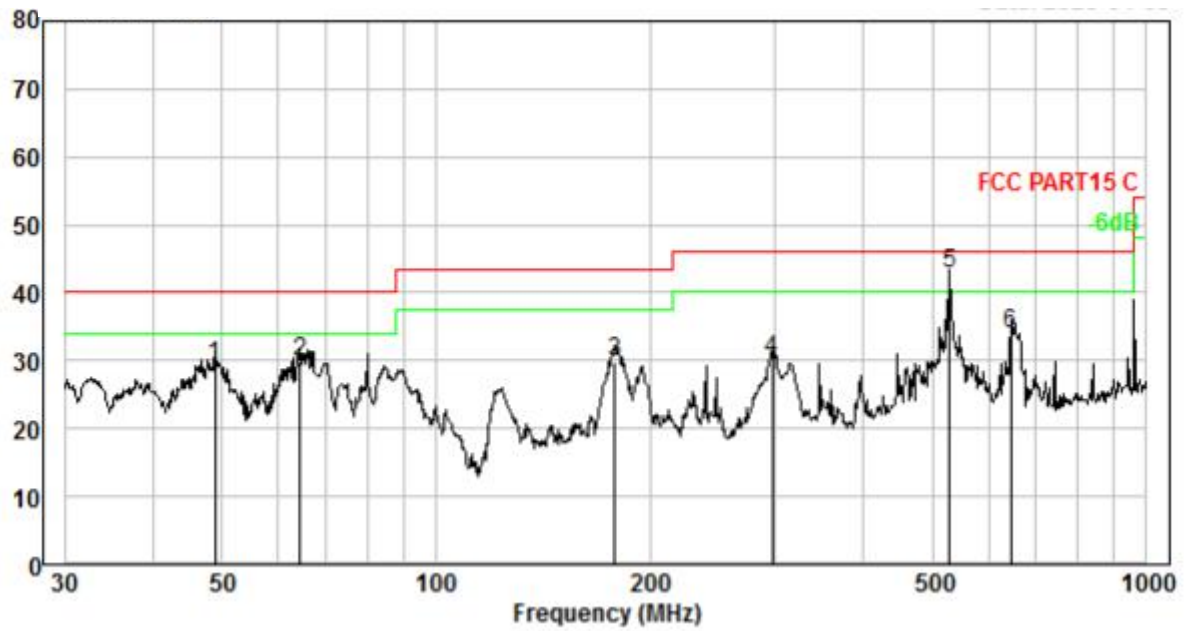

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	48.843	2.04	12.14	45.07	29.92	29.33	40.00	-10.67	QP
2.	64.433	2.51	11.08	46.29	29.95	29.93	40.00	-10.07	QP
3.	178.758	4.27	12.59	43.12	30.03	29.95	43.50	-13.55	QP
4.	297.224	5.14	13.16	42.25	30.31	30.24	46.00	-15.76	QP
5.	528.246	6.13	17.91	49.70	30.93	42.81	46.00	-3.19	QP
6.	645.120	6.48	19.52	39.13	31.04	34.09	46.00	-11.91	QP



Test Frequency: From 1GHz to 18GHz

802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	42.70	0.57	43.27	74.00	-30.73	H	PK
4824.000	31.72	0.57	32.29	54.00	-21.71	H	AV
7236.000	33.79	3.69	37.48	74.00	-36.52	H	PK
7236.000	21.16	3.69	24.85	54.00	-29.15	H	AV
4824.000	42.92	0.57	43.49	74.00	-30.51	V	PK
4824.000	32.36	0.62	32.98	54.00	-21.02	V	AV
7236.000	36.21	3.76	39.97	74.00	-34.03	V	PK
7236.000	24.65	3.76	28.41	54.00	-25.59	V	AV
Middle Channel-2437MHz							
4874.000	43.15	0.66	43.81	74.00	-30.19	H	PK
4874.000	31.83	0.66	32.49	54.00	-21.51	H	AV
7326.000	37.03	3.76	40.79	74.00	-33.21	H	PK
7326.000	25.97	3.76	29.73	54.00	-24.27	H	AV
4874.000	43.23	0.60	43.83	74.00	-30.17	V	PK
4874.000	31.95	0.60	32.55	54.00	-21.45	V	AV
7326.000	36.44	3.76	40.20	74.00	-33.80	V	PK
7326.000	25.33	3.76	29.09	54.00	-24.91	V	AV
High Channel-2462MHz							
4924.000	44.59	0.75	45.34	74.00	-28.66	H	PK
4924.000	31.45	0.75	32.20	54.00	-21.80	H	AV
7386.000	38.58	3.83	42.41	74.00	-31.59	H	PK
7386.000	26.46	3.83	30.29	54.00	-23.71	H	AV
4924.000	42.82	0.75	43.57	74.00	-30.43	V	PK
4924.000	31.49	0.75	32.24	54.00	-21.76	V	AV
7386.000	38.46	3.83	42.29	74.00	-31.71	V	PK
7386.000	25.96	3.83	29.79	54.00	-24.21	V	AV



802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	42.16	0.57	42.73	74.00	-31.27	H	PK
4824.000	31.48	0.57	32.05	54.00	-21.95	H	AV
7236.000	33.13	3.69	36.82	74.00	-37.18	H	PK
7236.000	22.52	3.69	26.21	54.00	-27.79	H	AV
4824.000	42.92	0.57	43.49	74.00	-30.51	V	PK
4824.000	31.19	0.57	31.76	54.00	-22.24	V	AV
7236.000	33.81	3.69	37.50	74.00	-36.50	V	PK
7236.000	21.74	3.69	25.43	54.00	-28.57	V	AV
Middle Channel-2437MHz							
4874.000	42.66	0.66	43.32	74.00	-30.68	H	PK
4874.000	31.36	0.66	32.02	54.00	-21.98	H	AV
7326.000	35.92	3.76	39.68	74.00	-34.32	H	PK
7326.000	24.81	3.76	28.57	54.00	-25.43	H	AV
4874.000	42.88	0.66	43.54	74.00	-30.46	V	PK
4874.000	31.72	0.66	32.38	54.00	-21.62	V	AV
7326.000	36.62	3.76	40.38	74.00	-33.62	V	PK
7326.000	25.27	3.76	29.03	54.00	-24.97	V	AV
High Channel-2462MHz							
4924.000	42.22	0.82	43.04	74.00	-30.96	H	PK
4924.000	30.78	0.82	31.60	54.00	-22.40	H	AV
7386.000	36.83	3.83	40.66	74.00	-33.34	H	PK
7386.000	25.60	3.83	29.43	54.00	-24.57	H	AV
4924.000	42.13	0.82	42.95	74.00	-31.05	V	PK
4924.000	30.83	0.82	31.65	54.00	-22.35	V	AV
7386.000	37.58	3.83	41.41	74.00	-32.59	V	PK
7386.000	25.77	3.83	29.60	54.00	-24.40	V	AV

802.11n (HT20)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	42.53	0.57	43.10	74.00	-30.90	H	PK
4824.000	31.16	0.57	31.73	54.00	-22.27	H	AV
7236.000	33.42	3.69	37.11	74.00	-36.89	H	PK
7236.000	21.55	3.69	25.24	54.00	-28.76	H	AV
4824.000	41.63	0.57	42.20	74.00	-31.80	V	PK
4824.000	31.46	0.57	32.03	54.00	-21.97	V	AV
7236.000	32.59	3.69	36.28	74.00	-37.72	V	PK
7236.000	22.28	3.69	25.97	54.00	-28.03	V	AV
Middle Channel- 2437MHz							
4874.000	43.49	0.66	44.15	74.00	-29.85	H	PK
4874.000	31.38	0.66	32.04	54.00	-21.96	H	AV
7326.000	35.65	3.76	39.41	74.00	-34.59	H	PK
7326.000	25.61	3.76	29.37	54.00	-24.63	H	AV
4874.000	42.11	0.66	42.77	74.00	-31.23	V	PK
4874.000	31.53	0.66	32.19	54.00	-21.81	V	AV
7326.000	36.08	3.76	39.84	74.00	-34.16	V	PK
7326.000	24.85	3.76	28.61	54.00	-25.39	V	AV
High Channel-2462MHz							
4924.000	42.34	0.75	43.09	74.00	-30.91	H	PK
4924.000	31.02	0.75	31.77	54.00	-22.23	H	AV
7386.000	37.08	3.83	40.91	74.00	-33.09	H	PK
7386.000	25.71	3.83	29.54	54.00	-24.46	H	AV
4924.000	41.63	0.82	42.45	74.00	-31.55	V	PK
4924.000	30.90	0.82	31.72	54.00	-22.28	V	AV
7386.000	37.45	3.83	41.28	74.00	-32.72	V	PK
7386.000	25.63	3.83	29.46	54.00	-24.54	V	AV

802.11n (HT40)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.000	43.14	0.60	43.74	74.00	-30.26	H	PK
4844.000	31.09	0.60	31.69	54.00	-22.31	H	AV
7266.000	33.78	3.72	37.50	74.00	-36.50	H	PK
7266.000	22.24	3.72	25.96	54.00	-28.04	H	AV
4844.000	42.77	0.60	43.37	74.00	-30.63	V	PK
4844.000	31.29	0.60	31.89	54.00	-22.11	V	AV
7266.000	34.00	3.72	37.72	74.00	-36.28	V	PK
7266.000	24.83	3.72	28.55	54.00	-25.45	V	AV
Middle Channel-2437MHz							
4874.000	42.42	0.66	43.08	74.00	-30.92	H	PK
4874.000	31.73	0.66	32.39	54.00	-21.61	H	AV
7326.000	36.10	3.76	39.86	74.00	-34.14	H	PK
7326.000	24.84	3.76	28.60	54.00	-25.40	H	AV
4874.000	4874.000	41.78	0.66	42.44	74.00	V	PK
4874.000	4874.000	31.66	0.66	32.32	54.00	V	AV
7326.000	7326.000	36.93	3.76	40.69	74.00	V	PK
7326.000	7326.000	25.66	3.76	29.42	54.00	V	AV
High Channel-2452MHz							
4904.000	43.31	0.72	44.03	74.00	-29.97	H	PK
4904.000	31.38	0.72	32.10	54.00	-21.90	H	AV
7356.000	36.97	3.81	40.78	74.00	-33.22	H	PK
7356.000	25.77	3.81	29.58	54.00	-24.42	H	AV
4904.000	42.39	0.72	43.11	74.00	-30.89	V	PK
4904.000	30.99	0.72	31.71	54.00	-22.29	V	AV
7356.000	36.83	3.81	40.64	74.00	-33.36	V	PK
7356.000	25.62	3.81	29.43	54.00	-24.57	V	AV

Note:

1. The testing has been conformed to $10 \times 2462\text{MHz} = 24620\text{MHz}$.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

2.4G WiFi (802.11b/g/n)mode have been tested, and the worst result(802.11g) was report as below

Test Mode: 802.11g Low Channel 2412MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2310.00	29.22	27.27	6.62	0	63.11	74	-10.89	V	Peak
2390.00	27.14	27.53	6.75	0	61.42	74	-12.58	V	
2310.00	28.98	27.27	6.62	0	62.87	74	-11.13	H	
2390.00	27.55	27.53	6.75	0	61.83	74	-12.17	H	
2310.00	12.32	27.27	6.62	0	46.21	54	-7.79	V	Average
2390.00	13.07	27.53	6.75	0	47.35	54	-6.65	V	
2310.00	12.14	27.27	6.62	0	46.03	54	-7.97	H	
2390.00	11.56	27.53	6.75	0	45.84	54	-8.16	H	

Test Mode: 802.11g High Channel 2462MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2483.50	28.25	27.85	6.83	0	62.93	74	-11.07	V	Peak
2500.00	26.21	27.9	6.84	0	60.95	74	-13.05	V	
2483.50	26.89	27.85	6.83	0	61.57	74	-12.43	H	
2500.00	29.22	27.9	6.84	0	63.96	74	-10.04	H	
2483.50	13.12	27.85	6.83	0	47.80	54	-6.20	V	Average
2500.00	11.34	27.9	6.84	0	46.08	54	-7.92	V	
2483.50	13.08	27.85	6.83	0	47.76	54	-6.24	H	
2500.00	10.74	27.9	6.84	0	45.48	54	-8.52	H	

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.



7 Conducted Spurious Emission and Band Edge Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value

measured RBW = 1MHz, VBW = 10Hz for

average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

2. the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.




7.2 Test Result

Please refer to the test plots as below.


802.11 b Low Channel

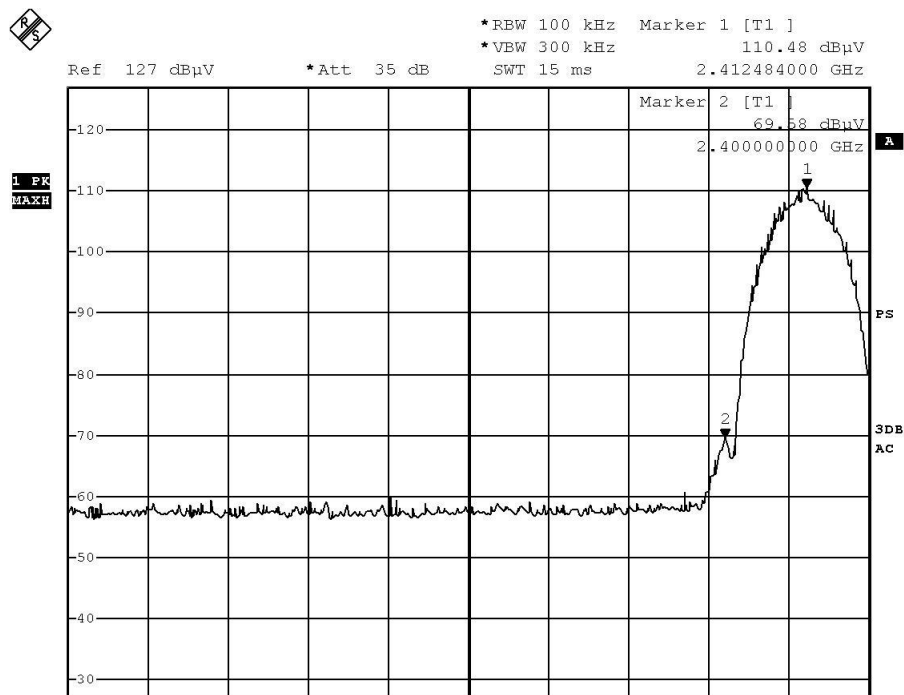

802.11b-Highest

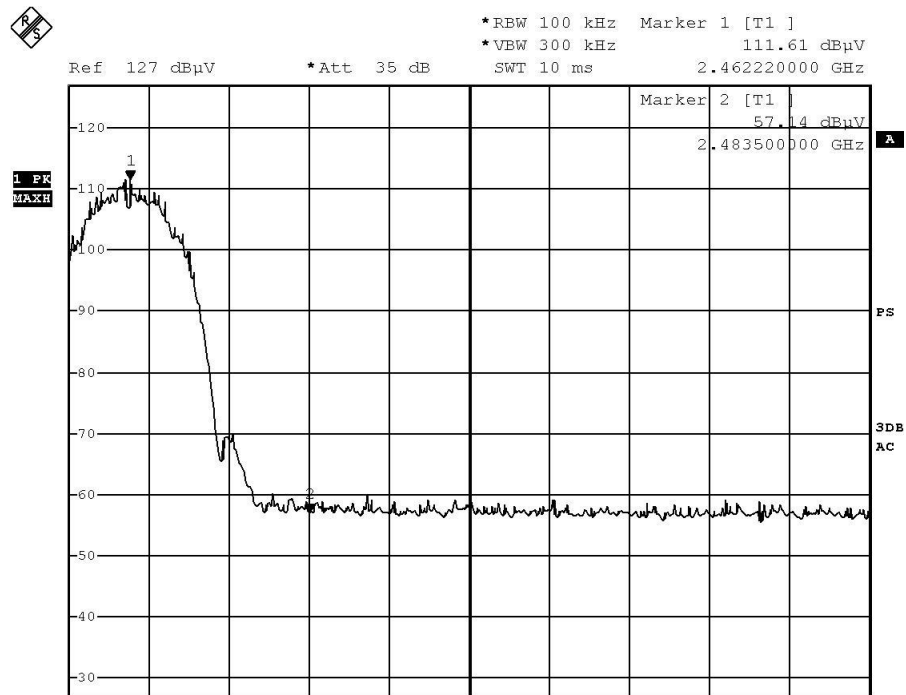


802.11g-Lowest

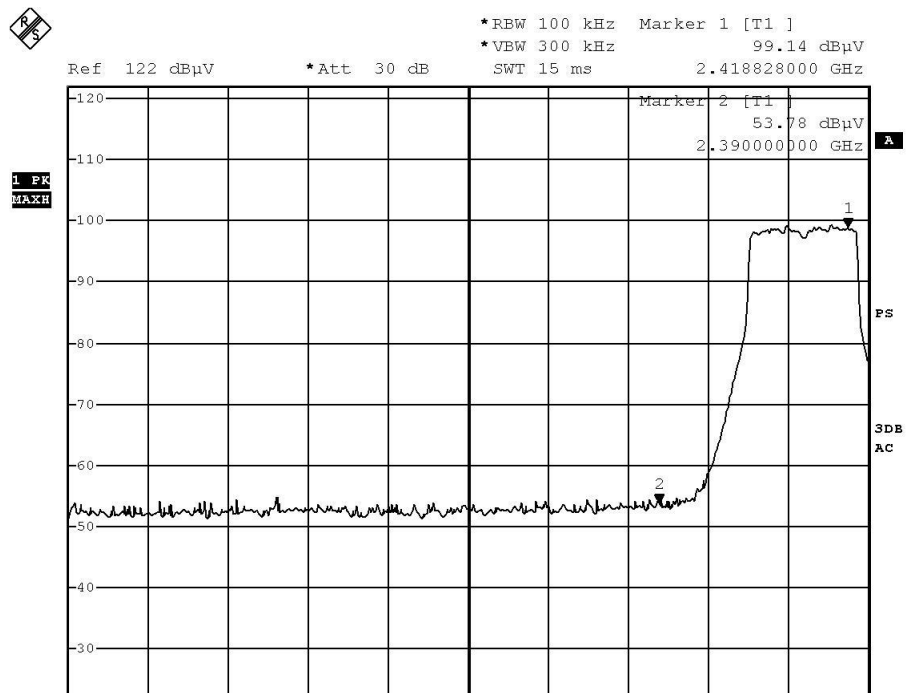




802.11g-Highest

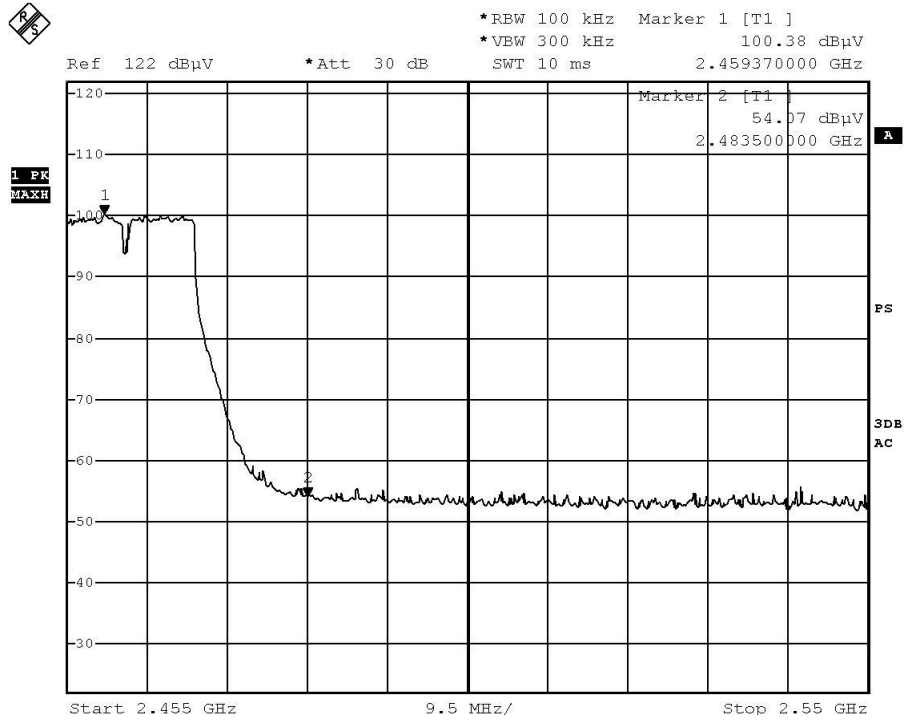


802.11n-HT20-Lowest

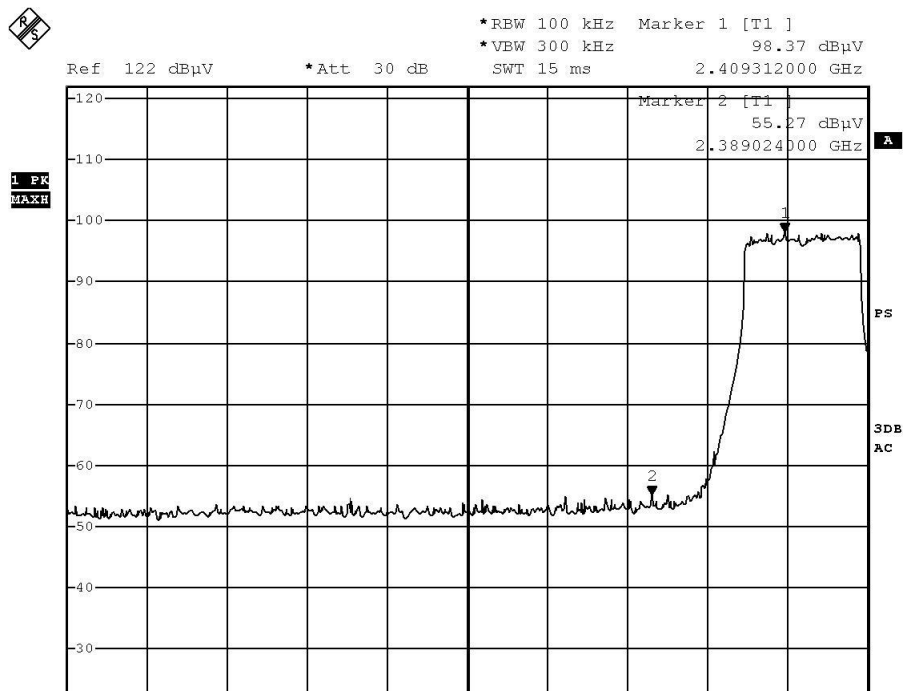




802.11n-HT20-Highest

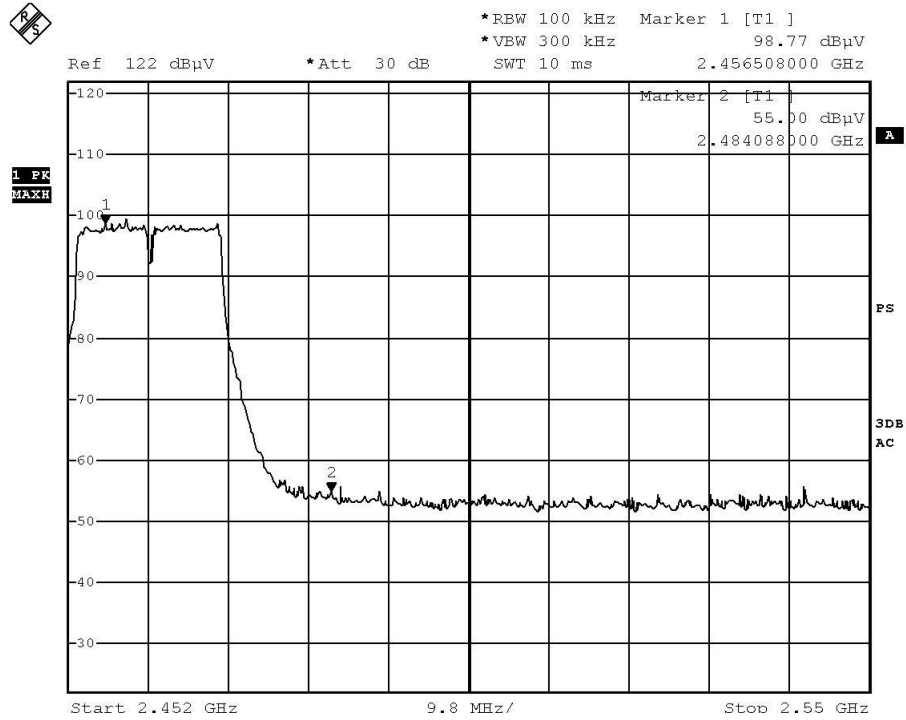


802.11n-HT40-Lowest

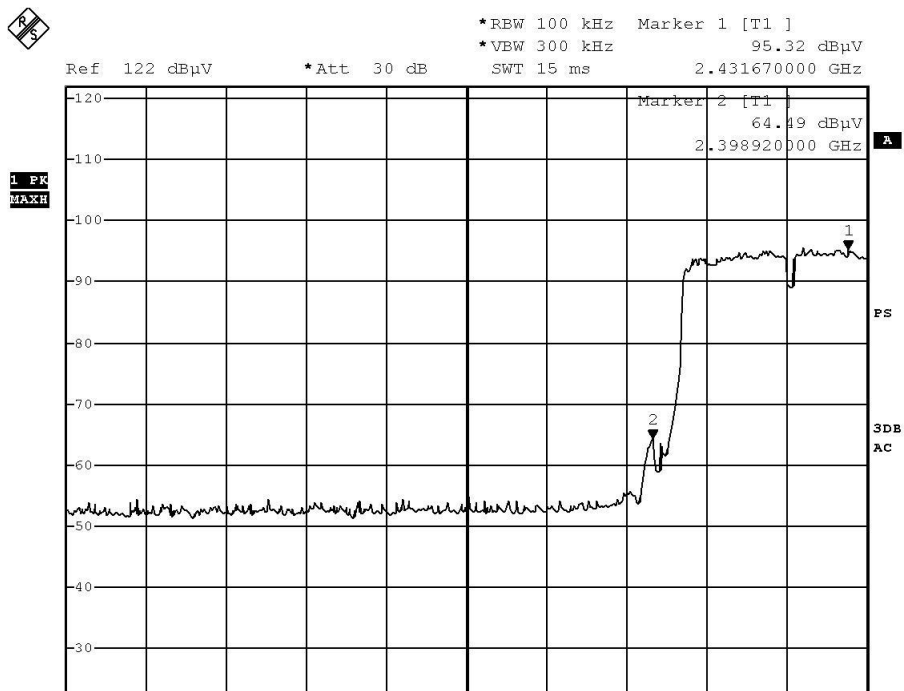



802.11n-HT40-Highest

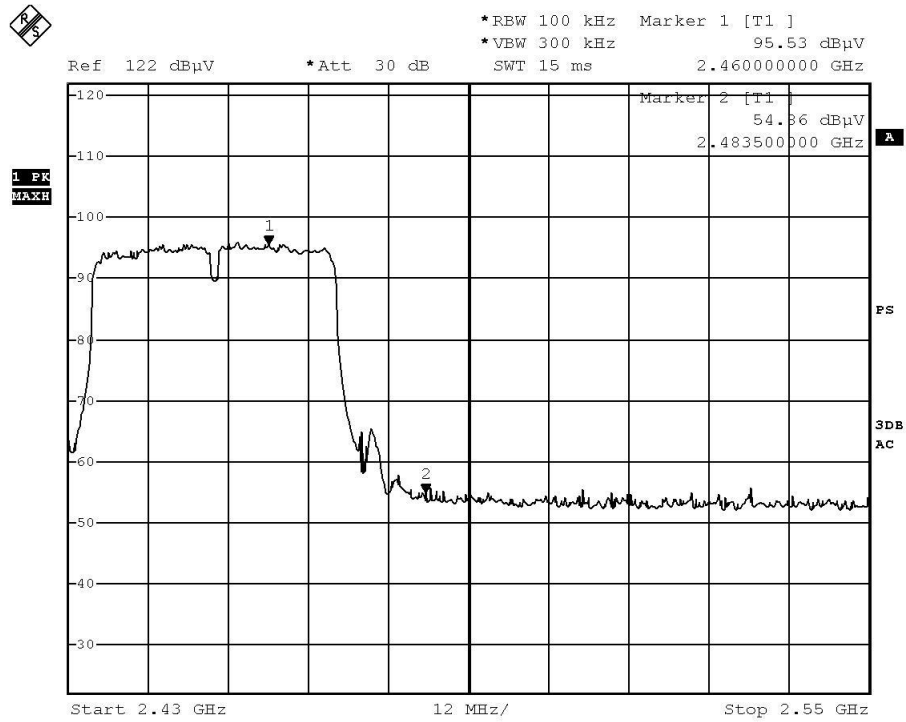



8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


8.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	6.66	7.14	7.08	≥500kHz
802.11g	16.45	16.55	16.525	≥500kHz
802.11n-HT20	17.70	17.675	17.675	≥500kHz
802.11n-HT40	36.36	36.36	36.36	≥500kHz


Please refer to the following test plots:



802.11b Low Channel

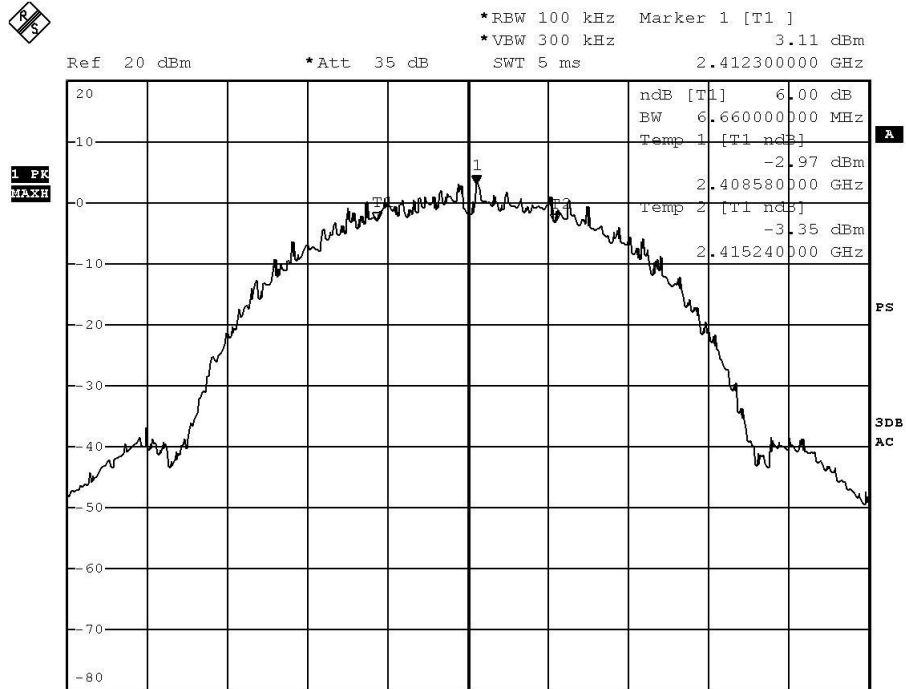


802.11b Middle Channel

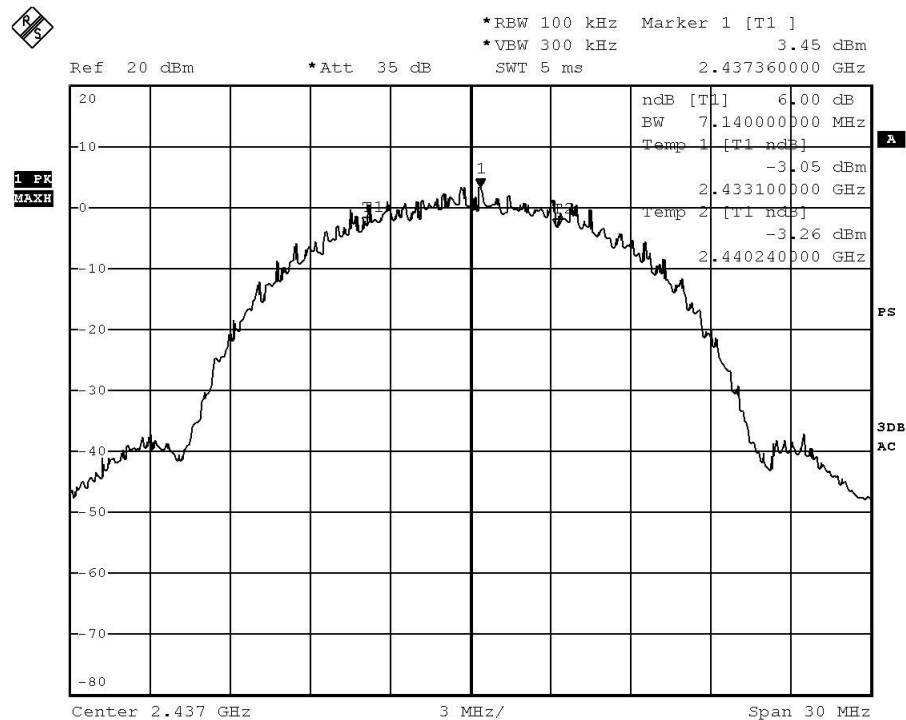




802.11b High Channel

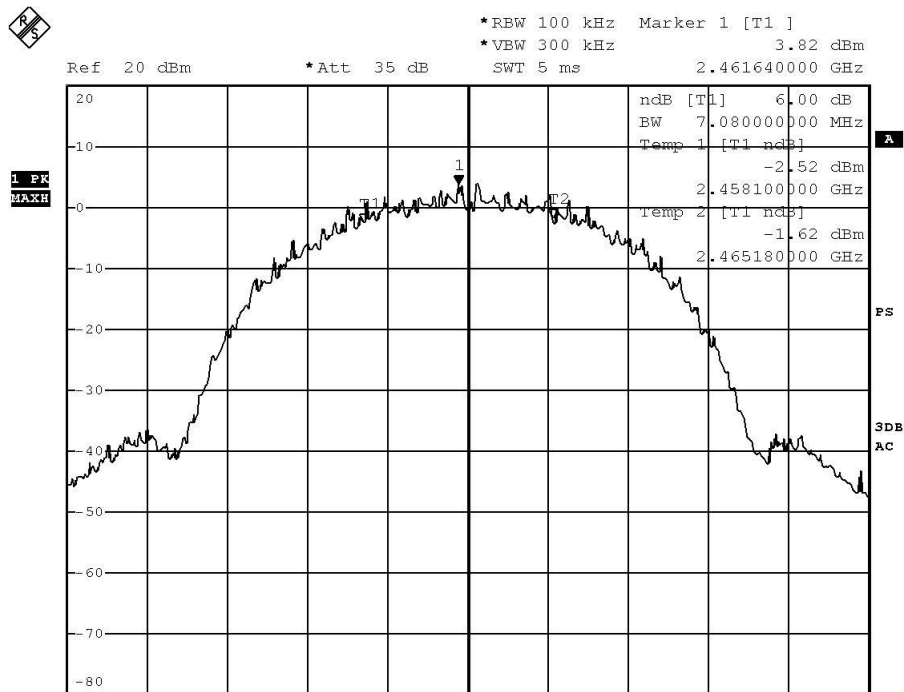


802.11g Low Channel

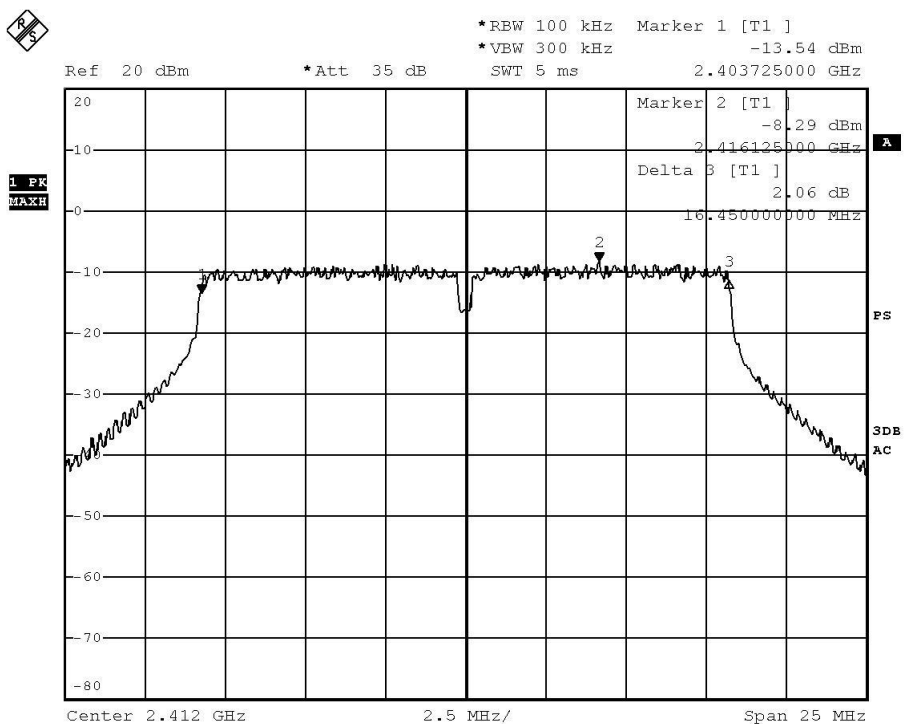




802.11g Middle Channel

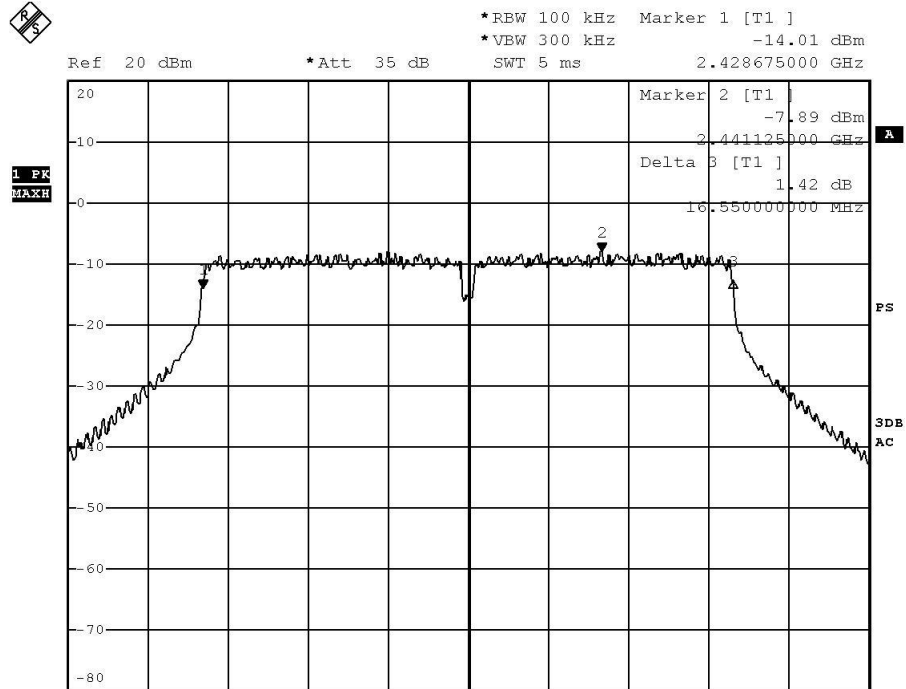


802.11g High Channel

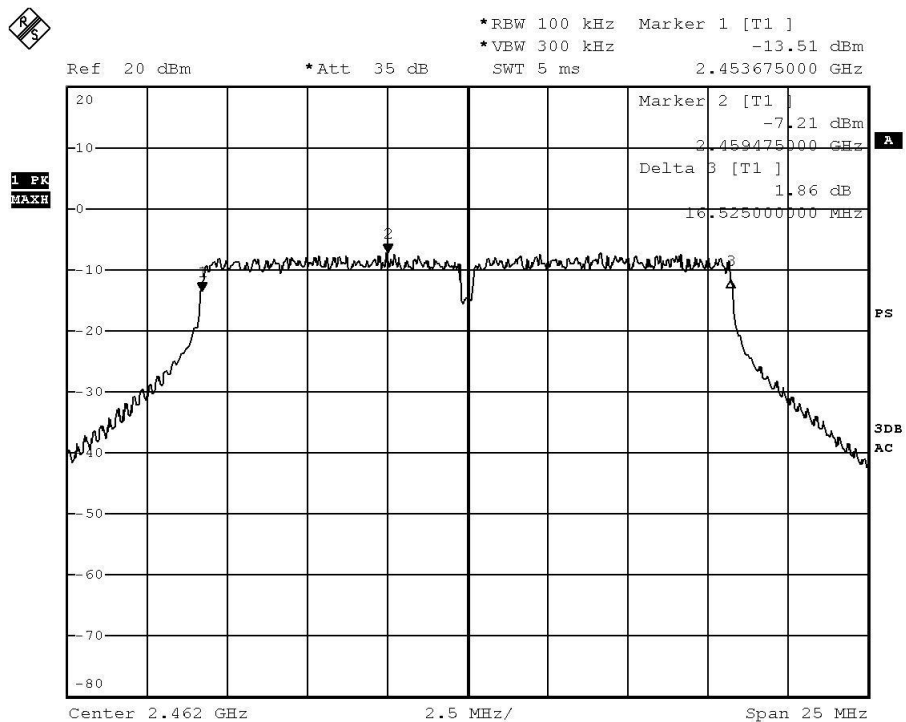




802.11n-HT20 Low Channel

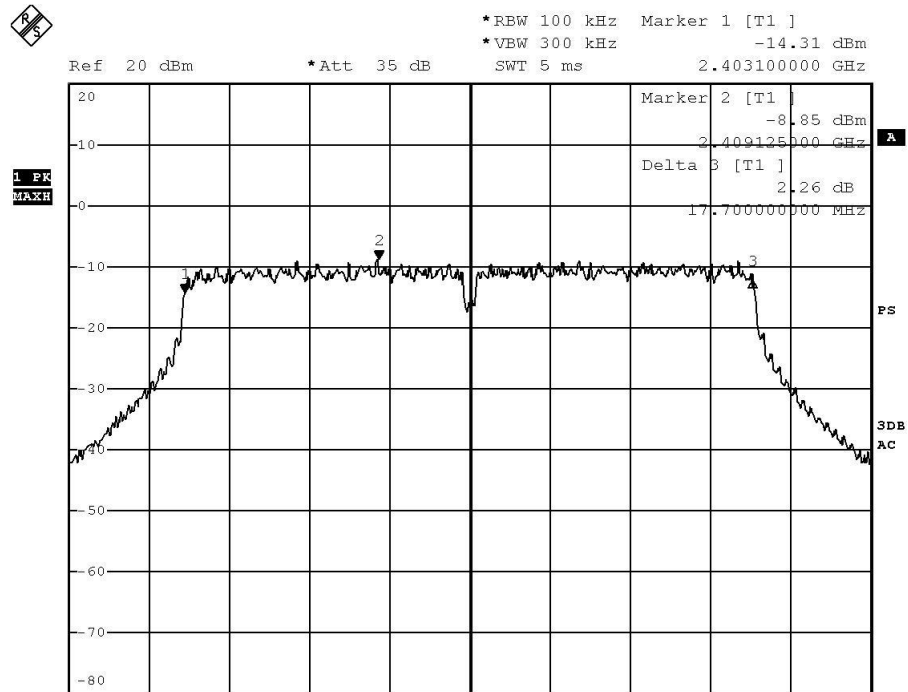


802.11n-HT20 Middle Channel

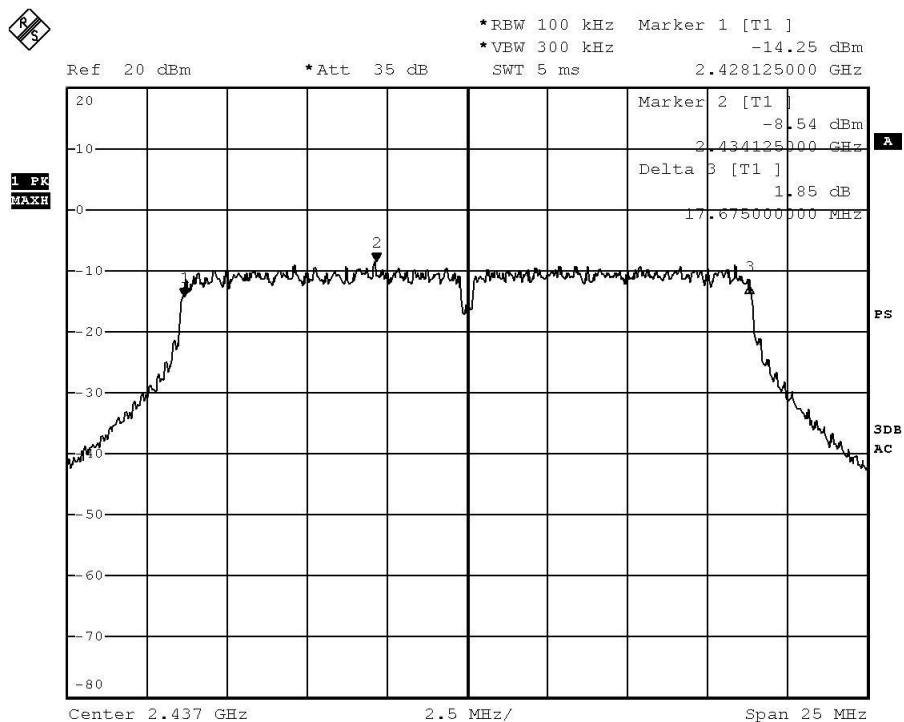




802.11n-HT20 High Channel

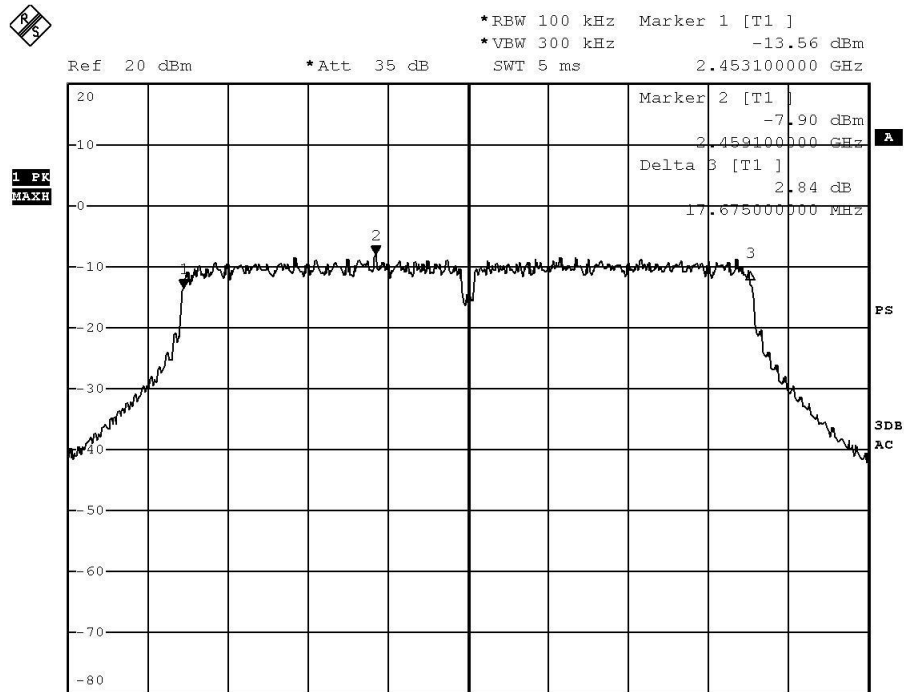


802.11n-HT40 Low Channel

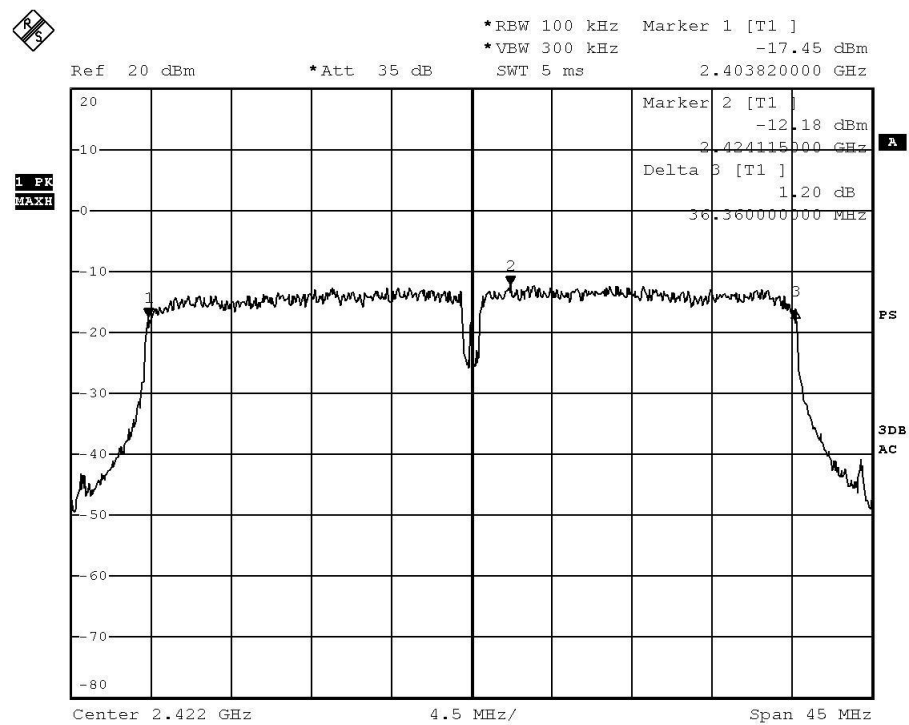




802.11n-HT40 Middle Channel

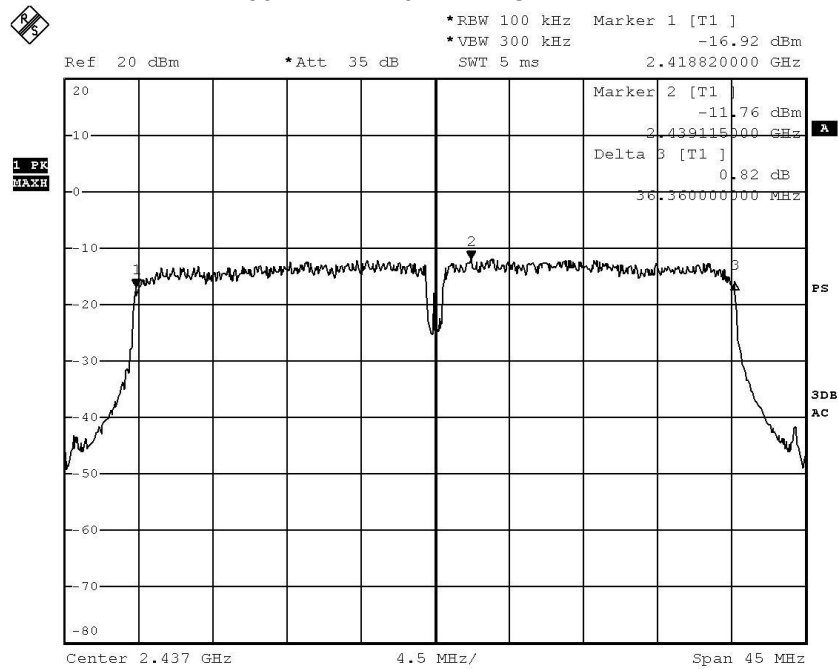

802.11n-HT40 High Channel

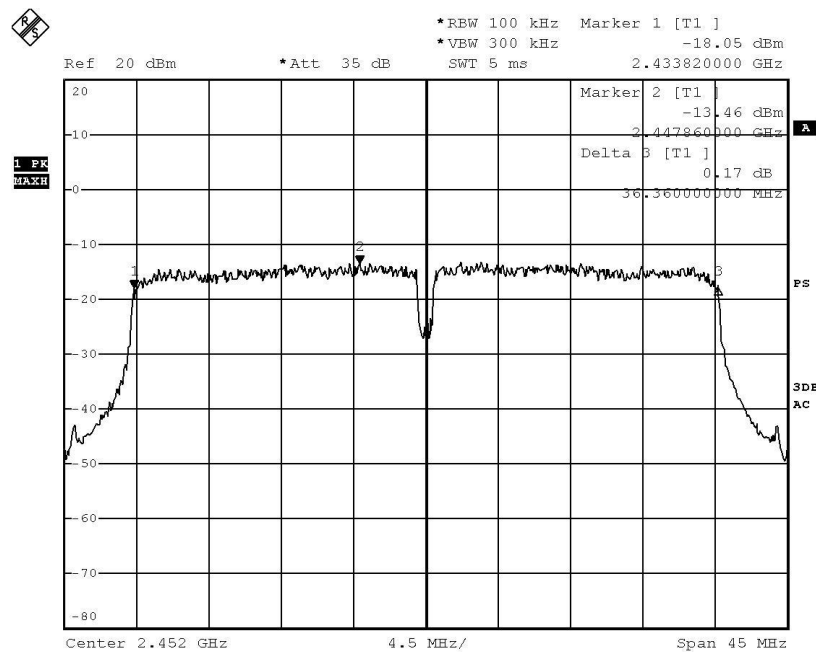



9 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

9.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v05 section 9.1.2 PKPM1 Peak Power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

9.2 Test Result

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	9.22	8.3560	1000
	2437	9.35	8.6099	1000
	2462	9.27	8.4528	1000
802.11g_54Mbps	2412	8.84	7.6560	1000
	2437	8.86	7.6913	1000
	2462	8.87	7.7090	1000
802.11n HT20_MCS7	2412	8.86	7.6913	1000
	2437	9.01	7.9616	1000
	2462	9.03	7.9983	1000
802.11n HT40_MCS7	2422	8.66	7.3451	1000
	2437	8.58	7.2111	1000
	2452	8.87	7.7090	1000



10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.1 Test Procedure

10. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

11. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.

12. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


10.2 Test Result

Modulation	Power Spectral density (dBm/3kHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	-9.93	-10.28	-10.19	8dBm/3kHz
802.11g	-21.71	-21.08	-20.99	8dBm/3kHz
802.11n-HT20	-22.52	-22.24	-22.18	8dBm/3kHz
802.11n-HT40	-24.69	-24.00	-24.71	8dBm/3kHz


Please refer to the following test plots:



802.11b Low Channel

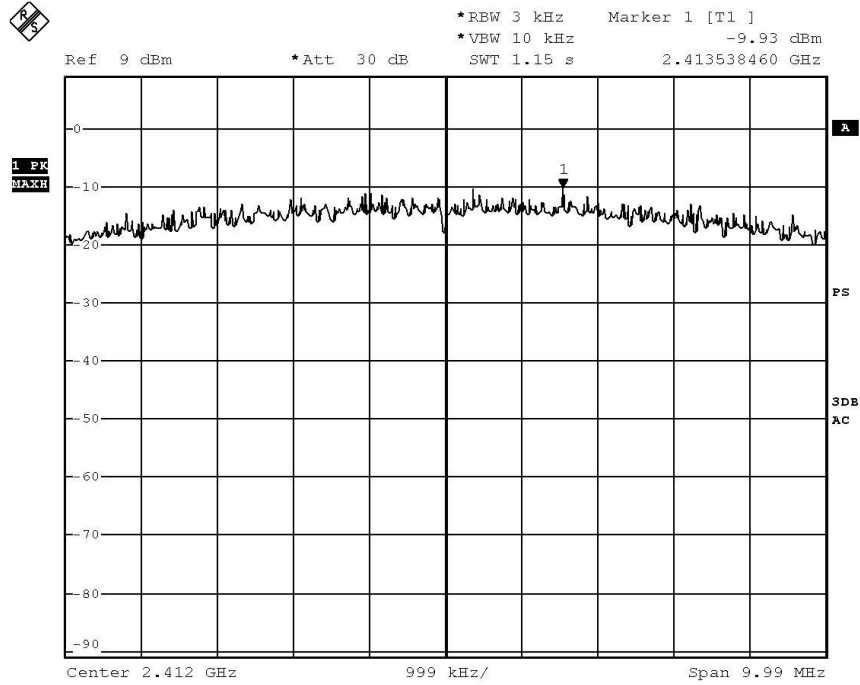


802.11b Middle Channel

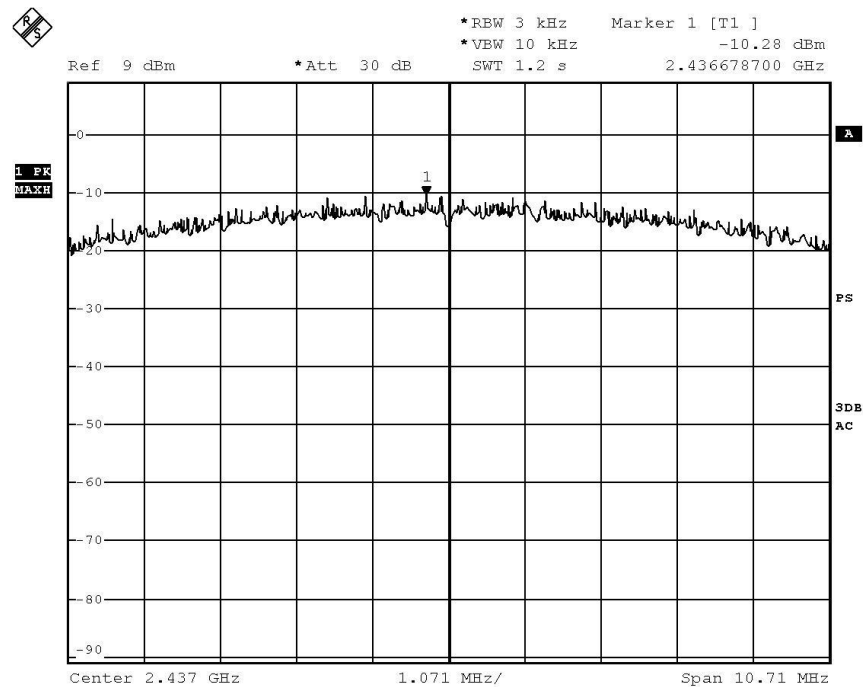




802.11b High Channel

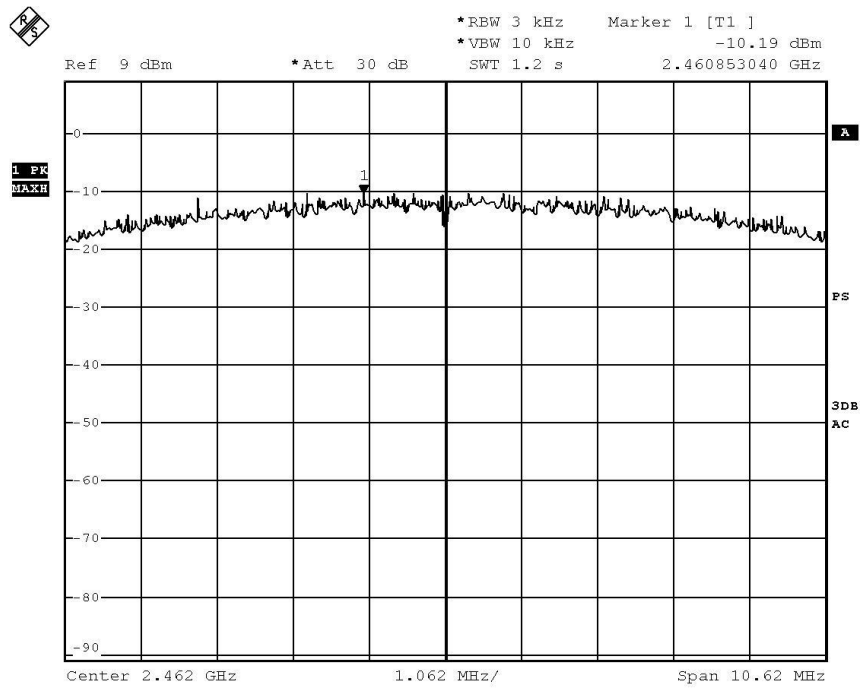


802.11g Low Channel

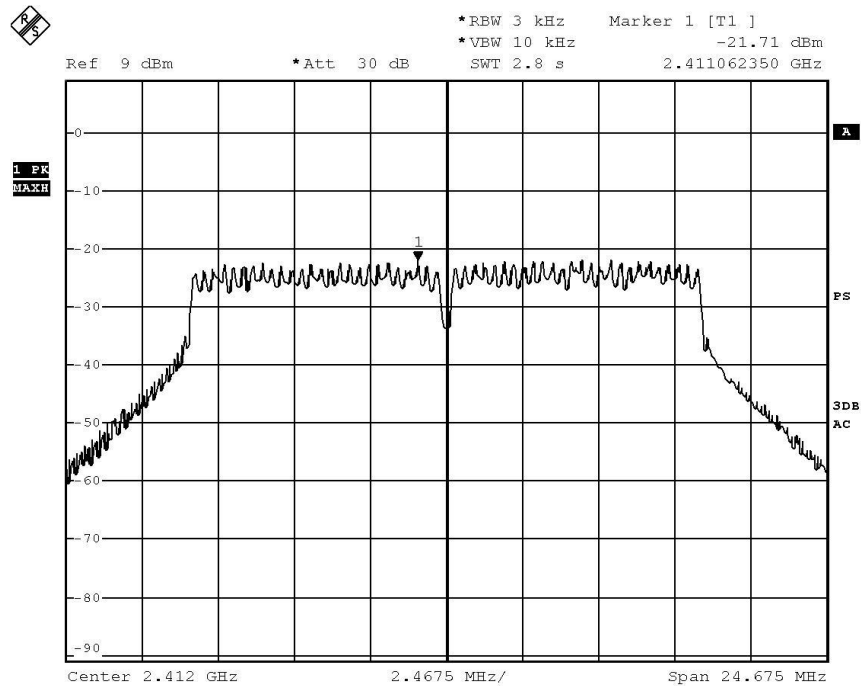




802.11g Middle Channel

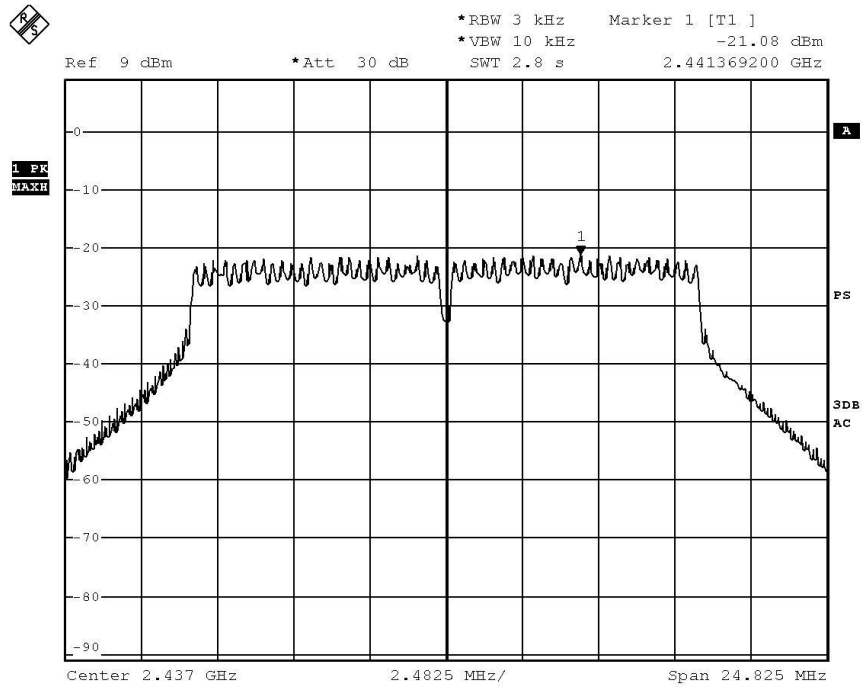


802.11g High Channel

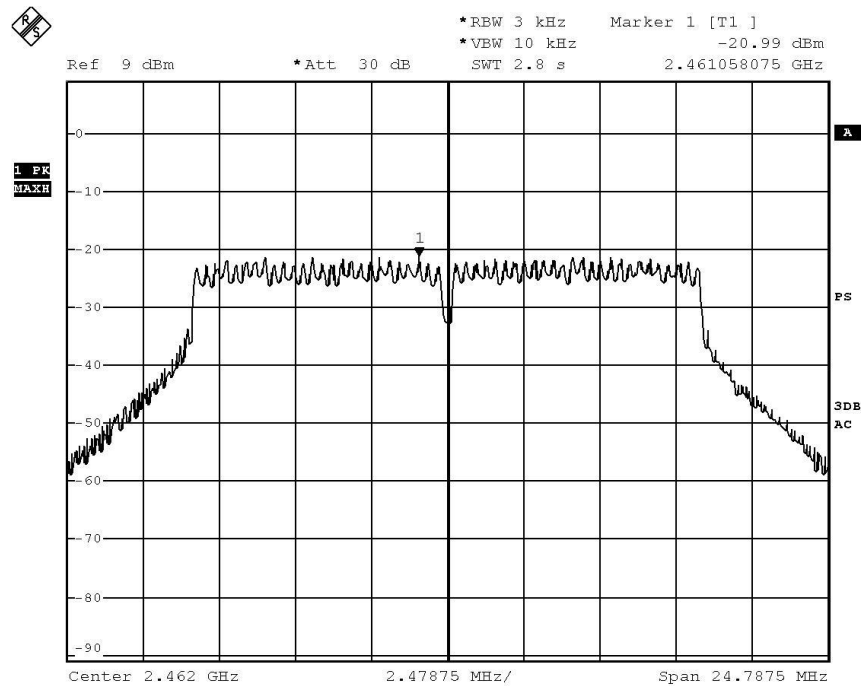




802.11n-HT20 Low Channel

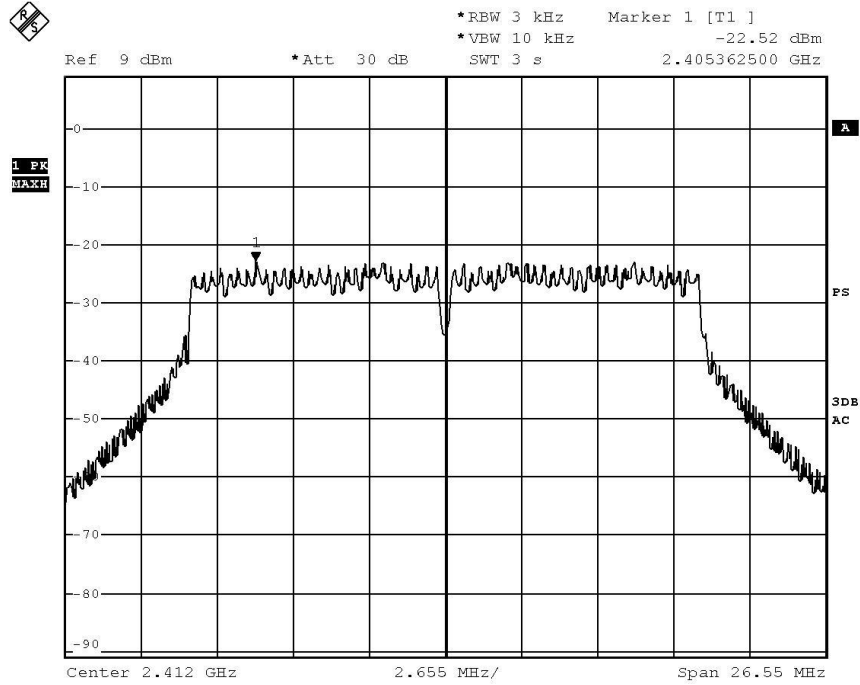


802.11n-HT20 Middle Channel

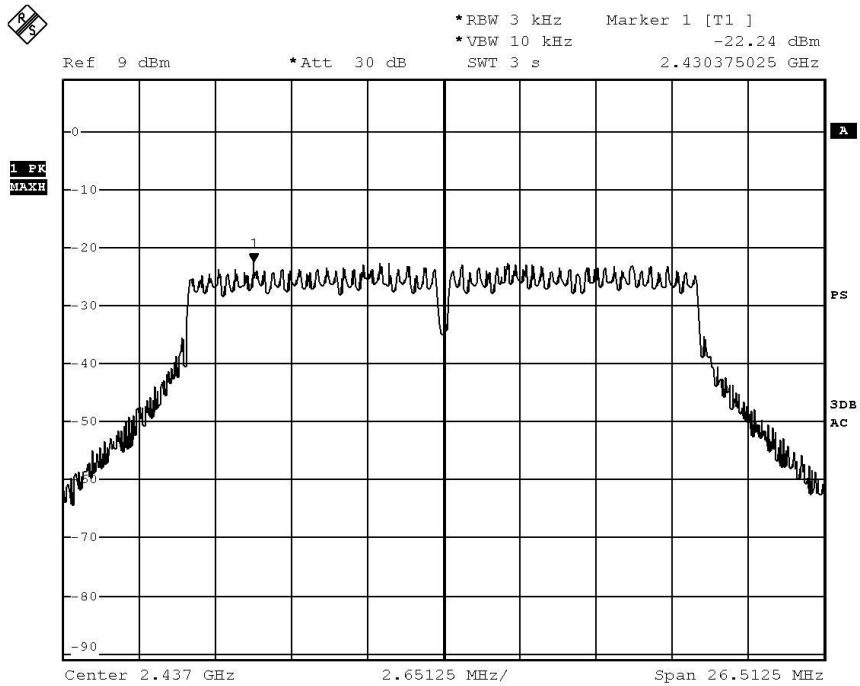




802.11n-HT20 High Channel

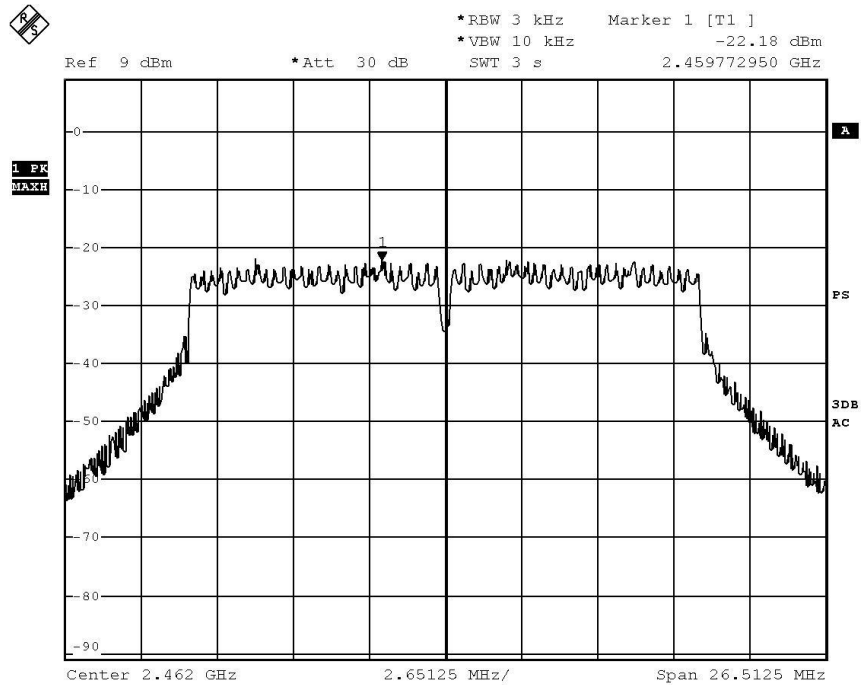


802.11n-HT40 Low Channel

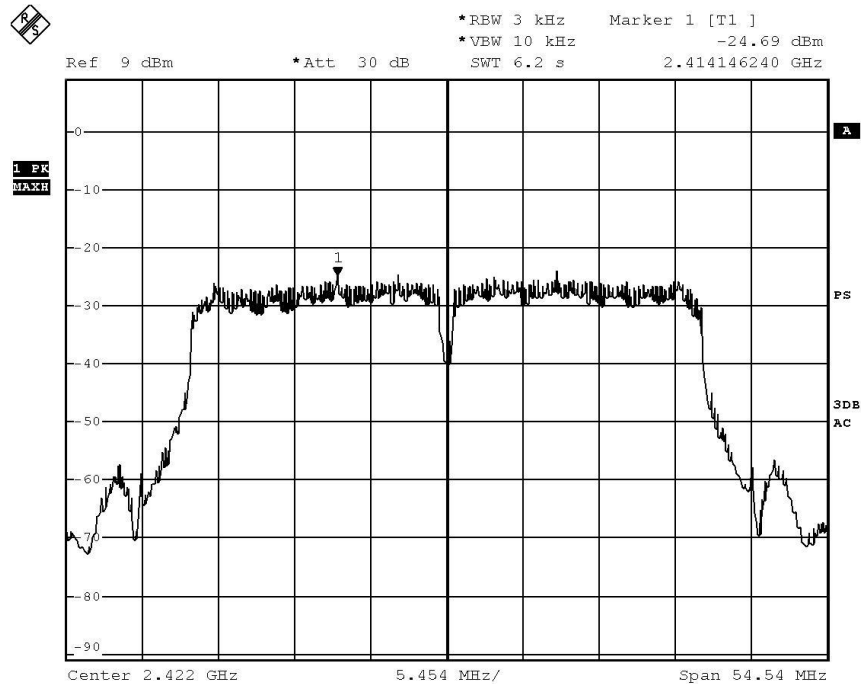




802.11n-HT40 Middle Channel

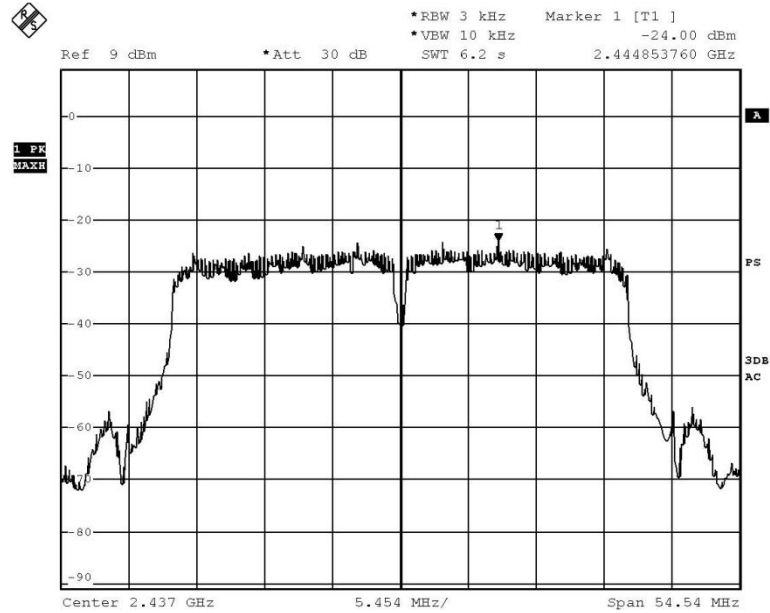

802.11n-HT40 High Channel

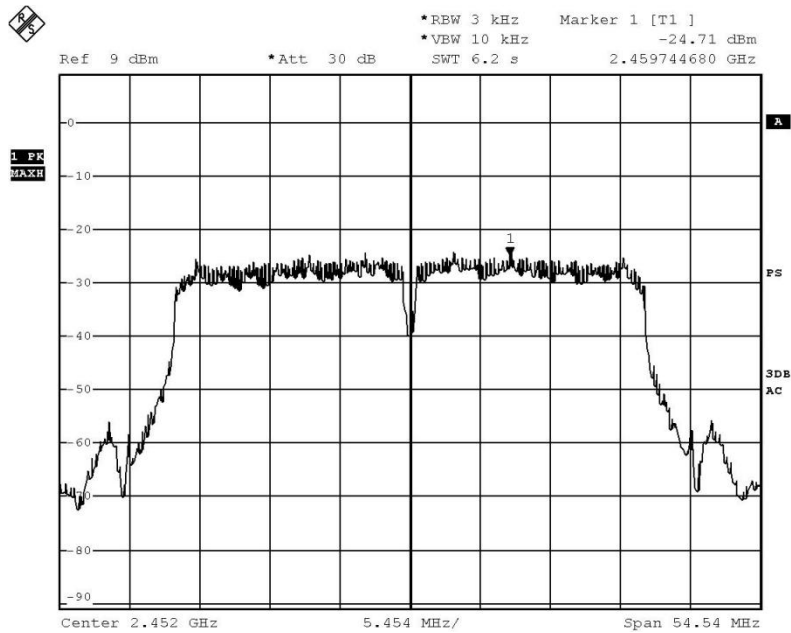



11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The EUT'S antenna, permanent attached antenna, is FPC Antennaa. The antenna's gain is 0dBi and meets the requirement.

******* End of test report *******