



TEST REPORT

Eurofins KCTL Co.,Ltd.
 65, Sinwon-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Korea
 TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
 KR22-SRF0064-B
 Page (1) of (169)



1. Client

- Name : Kaonbroadband CO., LTD.
- Address : 884-3, Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2022-02-10

2. Use of Report : Certification

3. Name of Product / Model : DOCSIS3.1 Gateway (IT) / CG3000BM

4. Manufacturer / Country of Origin : Kaonbroadband CO., LTD. / Korea

5. FCC ID : 2AXCW-CG3000BM

6. Date of Test : 2022-02-17 to 2022-04-28

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 15 Subpart C, 15.247

9. Test Result : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Euijung Kim  (Signature)	 (Signature)

2022-08-26

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SRF0064-B Page (2) of (169)	
--	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2022-05-12	Originally issued	-
2022-07-15	Updated	4, 5
2022-08-26	Updated	10

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR22-SRF0064-A is superseded by the report No. KR22-SRF0064-B.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Information about derivative model.....	5
2.2.	Accessory information	5
2.3.	Simultaneous Tx Condition	5
2.4.	Frequency/channel operations.....	6
2.5.	RF power setting in TEST SW	6
2.6.	Duty Cycle Factor	7
3.	Antenna requirement	9
3.1.	Antenna information.....	9
3.2.	Directional Gain Calculations.....	9
4.	Summary of tests.....	10
5.	Measurement uncertainty	11
6.	Measurement results explanation example	12
7.	Test results	13
7.1.	Maximum peak output power.....	13
7.2.	Peak Power Spectral Density	17
7.3.	6 dB Bandwidth(DTS Channel Bandwidth)	32
7.4.	Spurious Emission, Band Edge and Restricted bands.....	47
7.5.	Conducted Spurious Emission.....	142
7.6.	AC Conducted emission	167
8.	Measurement equipment.....	169

1. General information

Client : Kaonbroadband CO., LTD.
 Address : 884-3, Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Manufacturer : Kaonbroadband CO., LTD.
 Address : 884-3, Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : DOCSIS3.1 Gateway (IT)
 Model : CG3000BM
 Derivative Model : CG3000B
 Frequency range : 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
 2 422 MHz ~ 2 452 MHz (802.11n_H40)
 UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n/ac_HT20/VHT20)
 UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n/ac_HT40/VHT40)
 UNII-1: 5 210 MHz (802.11ac_VHT80)
 UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n/ac_HT20/VHT20)
 UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n/ac_HT40/VHT40)
 UNII-2A: 5 290 MHz (802.11ac_VHT80)
 UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n/ac_HT20/VHT20)
 UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n/ac_HT40/VHT40)
 UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80)
 UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n/ac_HT20/VHT20)
 UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n/ac_HT40/VHT40)
 UNII-3: 5 775 MHz (802.11ac_VHT80)
 Modulation technique : WIFI(802.11a/b/g/n/ac)_DSSS, OFDM
 Number of channels : 802.11b/g/n_HT20 : 11 ch (20 MHz), 7 ch (40 MHz),
 UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
 UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
 UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
 UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
 Power source : DC 12 V
 Antenna specification : PCB Antenna (33.5mm_150mm): 2.4 GHz ANT 0,1 / 5 GHz ANT 0,2,3
 PCB Antenna (33.5mm_200mm): 2.4 GHz ANT 2 / 5 GHz ANT 1

Antenna gain : 2.4 GHz band : ANT 0: 1.90 dBi, ANT 1: 1.90 dBi, ANT 2: 1.90 dBi
 UNII-1 ANT 0: 1.50 dBi, ANT 1: 1.60 dBi, ANT 2: 1.50 dBi, ANT 3: 1.50 dBi
 UNII-2A ANT 0: 1.60 dBi, ANT 1: 1.60 dBi, ANT 2: 1.60 dBi, ANT 3: 1.60 dBi
 UNII-2C ANT 0: 1.80 dBi, ANT 1: 2.00 dBi, ANT 2: 1.80 dBi, ANT 3: 1.80 dBi
 UNII-3 ANT 0: 2.00 dBi, ANT 1: 1.70 dBi, ANT 2: 2.00 dBi, ANT 3: 2.00 dBi

Software version : v1.01.12

Hardware version : REV1.0

Test device serial No. : N/A

Operation temperature : -20 °C ~ 50 °C

Note. The Product equality letter includes detailed information about the differences between basic and derivative model.

2.1. Information about derivative model

The difference between basic model and derivative models is:
 The basic and derivative model are the same mechanically, electrically.
 All models are made up by same H/W, F/W.

The support card is different for each model.
 Please refer to the below list.

	CG3000BM	CG3000B
DC DC location	Top side	Same as G3000BM, but with or without Polymer cap 1point
Docsis DX FILTER	No shield can	Shielded
DDR	1G	512M
Nand flash	512M	256M
Bottom heatsink	No Bottom heatsink	Bottom heatsink
ETH port TVS diode	TVS Diode	No TVS Diode

Both models were pre-investigated before testing, and the worst case among them was tested.
 Worst case model: CG3000BM (Basic model)

2.2. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
AC Adapter	MASS POWER	S042-1A120333VU	N/A	Input: 100-240 V, 50/60Hz/1.0 A Output: 12 V/3.33A

2.3. Simultaneous Tx Condition

For Simultaneous mode, please refer to
 Test report No.KR22-SRF0065 issued on 12 May, 2022 by KCTL Inc.

2.4. Frequency/channel operations

This device contains the following capabilities:

2.4 GHz WIFI: WLAN 802.11b/g/n(HT20/HT40)

5 GHz WIFI: WLAN 802.11a/n(HT20/HT40)/ac(VHT20/VHT40/VHT80)

Ch.	Frequency (MHz)
01	2 412
⋮	⋮
06	2 437
⋮	⋮
11	2 462

Table 2.4.1. 802.11b/g/n_HT20 mode

Ch.	Frequency (MHz)
03	2 422
⋮	⋮
06	2 437
⋮	⋮
09	2 452

Table 2.4.2. 802.11n_HT40 mode

2.5. RF power setting in TEST SW

Mode	Frequency(MHz)	RF Power setting value			
		ANT 0	ANT 1	ANT 2	MIMO
802.11b_ANT 2	2 412	27	27	27	23
	2 437	33	33	33	30
	2 462	36	36	36	33
802.11g	2 412	22	22	22	30
	2 437	28	28	28	30
	2 462	31	31	31	32
802.11n_HT20	2 412	23	23	23	30
	2 437	27	27	27	30
	2 462	31	31	31	32
802.11n_HT40	2 422	29	29	29	32
	2 437	24	24	24	32
	2 452	33	33	33	32


2.6. Duty Cycle Factor

SISO

Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11b	9.051 7	8.404 9	0.928 5	92.85	0.32
802.11g	0.234 2	0.128 1	0.547 0	54.70	2.62
802.11n_HT20	0.242 1	0.144 1	0.595 2	59.52	2.25
802.11n_HT40	0.218 0	0.120 0	0.550 5	55.05	2.59

Notes.

1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to Average result if duty cycle is more than 98%

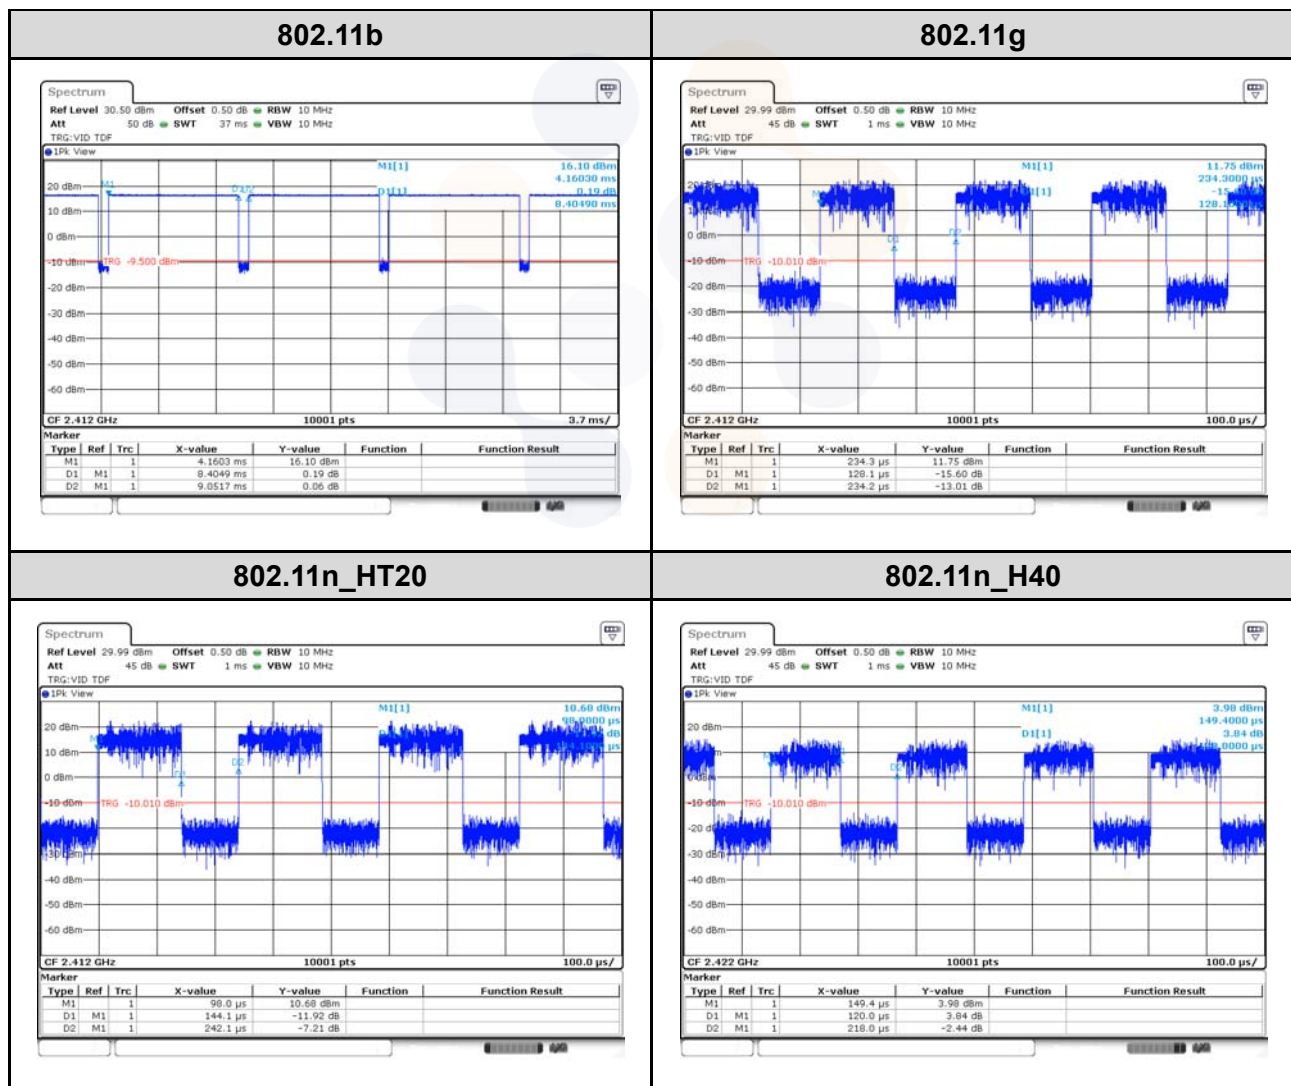


MIMO

Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11b	9.051 7	8.404 9	0.928 5	92.85	0.32
802.11g	0.234 2	0.128 1	0.547 0	54.70	2.62
802.11n_HT20	0.242 2	0.144 1	0.595 0	59.50	2.26
802.11n_HT40	0.218 0	0.120 0	0.550 5	55.05	2.59

Notes.

1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to Average result if duty cycle is more than 98%

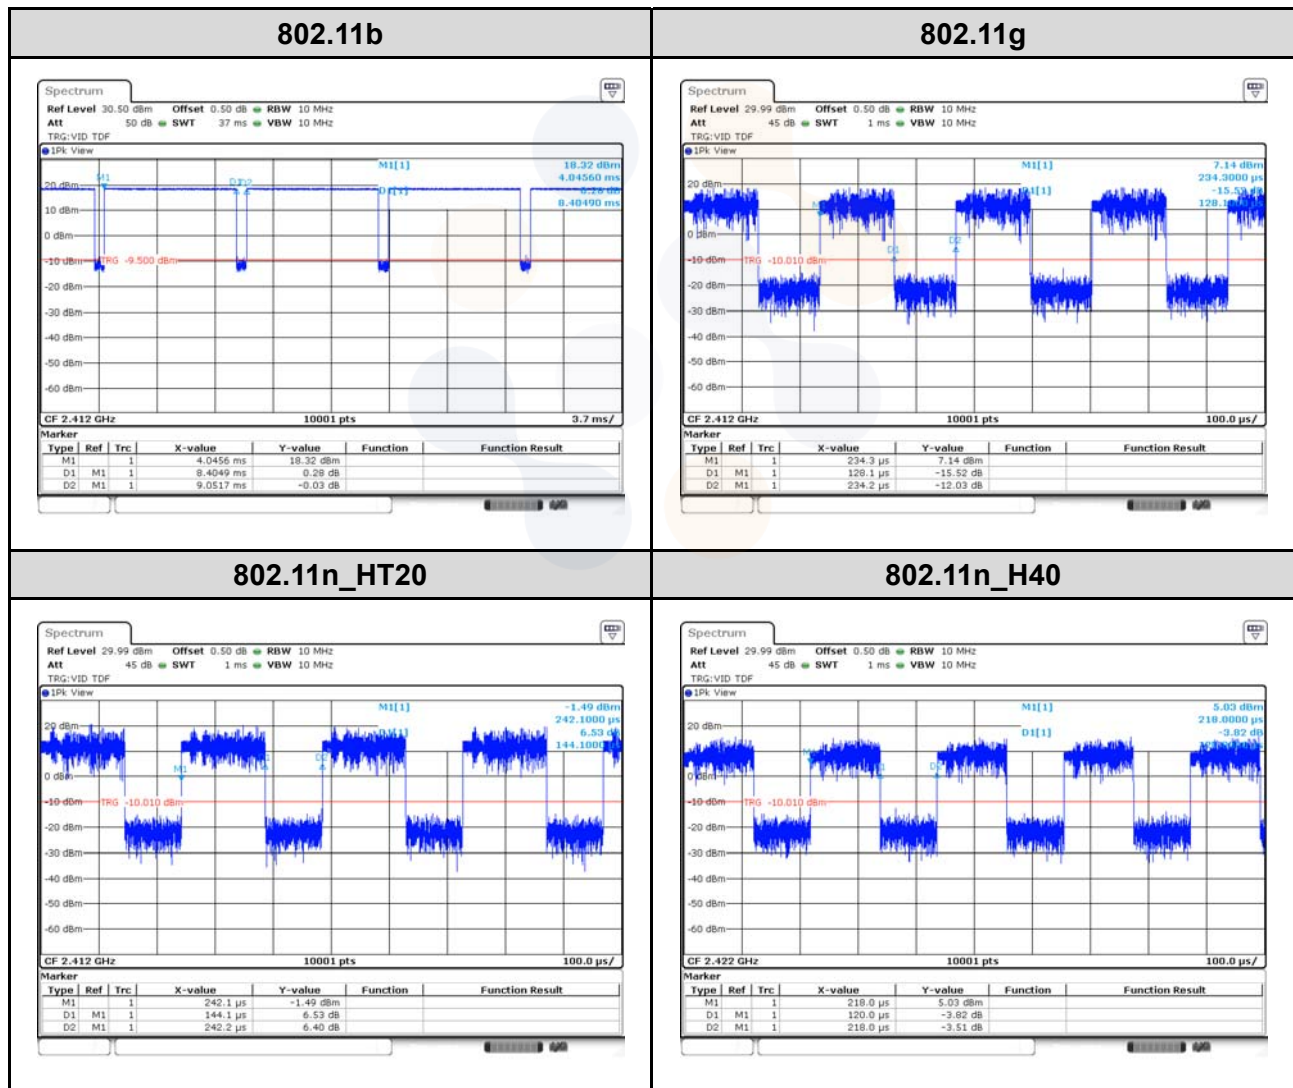

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached PCB Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

3.1. Antenna information

Mode	SISO			CDD	MIMO
	ANT 0	ANT 1	ANT 2	ANT 0 + 1 + 2	ANT 0 + 1 + 2
802.11b	√	√	√	√	X
802.11g	√	√	√	√	X
802.11n HT20	√	√	√	√	√
802.11n HT40	√	√	√	√	√

√ = Support, X = Not support

Note.

1. This device employs SISO and CDD, MIMO technology output power as ANT 0 and ANT 1 and ANT 2.

3.2. Directional Gain Calculations

According to clause F), 2), f), (iii) of KDB 662911 D01 Multiple Transmitter Output, Directional gain may be calculated by using the formulas as below.

3.2.1. Directional Antenna Gain with equal gain

ANT 0 Gain (dBi)	ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	PSD Directional Gain (dBi)	Power Directional Gain (dBi)
1.90	1.90	1.90	6.67	1.90

Note.

1. If all transmit signals are completely correlated, then

Directional gain = $G_{ANT\ MAX}$ + Array Gain.

- For PSD measurements on all devices Array gain = $10 \log (N_{ANT} / N_{ss})$ dB
- For Power measurements on IEEE 802.11 devices Array gain = 0 dB For $N_{ANT} \leq 4$.

4. Summary of tests

FCC Part section(s)	Parameter	Test Condition	Test results
15.247(b)(3)	Maximum Peak Output Power	Conducted	Pass
15.247(e)	Peak Power Spectral Density		Pass
15.247(a)(2)	6 dB Channel Bandwidth		Pass
15.207(a)	AC Conducted Emissions		Pass
15.247(d)	Conducted Spurious Emissions		Pass
15.205(a), 15.209(a)	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- According to ANSI C63.10 6.3.1, the fundamental of the EUT was investigated in two orthogonal orientations X, Y. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation.
(EUT: wireless access points)
- The EUT supports SISO and MIMO modes
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 558074 D01 V05r02
- The worst-case data rate were:
 - 802.11b mode: 1Mbps
 - 802.11g mode: 6Mbps
 - 802.11n_HT20 mode: MCS0
 - 802.11n_HT40 mode: MCS0

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	Below 30 MHz:	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 MHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	10.01	9 000	11.61
50	10.03	10 000	11.79
100	10.08	11 000	11.76
200	10.16	12 000	11.87
300	10.22	13 000	12.22
400	10.26	14 000	12.06
500	10.32	15 000	12.16
600	10.35	16 000	12.19
700	10.39	17 000	12.29
800	10.42	18 000	12.41
900	10.46	19 000	12.49
1 000	10.42	20 000	12.43
2 000	10.67	21 000	12.65
3 000	10.85	22 000	12.84
4 000	11.06	23 000	12.75
5 000	11.20	24 000	12.67
6 000	11.30	25 000	12.92
7 000	11.41	26 000	12.99
8 000	11.49	26 500	12.84


Note :

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

ANSI C63.10 - Section 11.9

Used test method is section 11.9.1.3 and 11.9.2.3.1

Test settings

General

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

11.9.1. Maximum peak conducted output power

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

11.9.1.1. RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

11.9.1.3. PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR22-SRF0064-B Page (15) of (169)	
---	--	---

11.9.2.3.1. Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

- a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding $[10 \log(1/D)]$, where D is the duty cycle

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

SISO

Test mode	Frequency (MHz)	Conducted output power (dBm)						Limit (dBm)
		ANT 0		ANT 1		ANT 2		
		Peak	Average	Peak	Average	Peak	Average	
802.11b	2 412	17.37	13.45	17.57	13.77	18.38	14.40	30
	2 437	15.17	11.25	14.77	10.88	15.57	11.67	
	2 462	13.57	9.65	14.07	10.17	12.86	8.87	
802.11g	2 412	26.59	16.11	26.69	16.42	27.09	16.93	
	2 437	25.39	13.92	24.59	13.68	25.59	14.29	
	2 462	24.19	12.31	24.29	13.10	23.09	11.80	
802.11n HT20	2 412	26.79	16.02	26.99	16.11	27.39	16.79	
	2 437	25.99	14.76	26.29	14.39	26.19	15.15	
	2 462	24.19	12.52	25.29	13.23	23.49	11.71	
802.11n HT40	2 422	25.39	12.41	24.59	12.28	25.79	13.39	
	2 437	26.99	15.71	27.39	15.69	27.59	16.10	
	2 452	23.89	11.30	23.99	11.56	22.98	10.69	

MIMO


Test mode	Frequency (MHz)	Conducted output power (dBm)								Limit (dBm)
		ANT 0		ANT 1		ANT 2		MIMO		
		Peak	Average	Peak	Average	Peak	Average	Peak	Average	
802.11b	2 412	19.48	15.36	19.58	15.53	20.38	16.34	24.60	20.54	30
	2 437	16.47	12.41	16.27	12.25	16.47	12.44	21.18	17.14	
	2 462	14.57	10.47	14.47	10.57	13.77	9.70	19.06	15.04	
802.11g	2 412	22.48	11.32	23.09	11.83	23.49	12.60	27.81	16.72	
	2 437	23.69	12.50	23.49	12.37	23.89	12.79	28.46	17.33	
	2 462	22.28	11.33	22.88	11.99	21.08	10.55	26.91	16.10	
802.11n HT20	2 412	23.49	11.80	23.69	12.01	23.89	12.61	28.46	16.92	
	2 437	24.29	12.63	23.99	12.53	24.39	12.93	29.00	17.47	
	2 462	23.09	11.63	23.49	12.23	22.28	10.75	27.75	16.34	
802.11n HT40	2 422	23.19	10.62	23.19	10.38	23.69	11.39	28.13	15.59	
	2 437	23.99	11.32	23.89	11.19	23.59	11.48	28.60	16.11	
	2 452	23.79	11.55	24.09	11.66	22.98	10.66	28.42	16.09	

Notes:

- Conducted output power(Average) = reading value of average power + D.C.F
- $MIMO = 10\log(10^{(ANT0/10)} + 10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dB m)

7.2. Peak Power Spectral Density

Test setup



Limit

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure

ANSI C63.10 - Section 11.10.2

Test settings

Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4) Set the VBW $\geq 3 \times \text{RBW}$.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


Test results

SISO


Test mode	Frequency (MHz)	Power Spectral Density			Limit (dBm/3 kHz)
		Result (dBm/3 kHz)			
		ANT 0	ANT 1	ANT 2	
802.11b	2 412	-8.58	-8.28	-7.47	8.00
	2 437	-11.43	-9.36	-10.43	
	2 462	-12.62	-10.90	-13.22	
802.11g	2 412	-11.17	-10.54	-9.77	
	2 437	-12.97	-11.57	-9.82	
	2 462	-14.58	-13.71	-15.38	
802.11n HT20	2 412	-8.97	-9.46	-9.78	
	2 437	-12.08	-11.86	-11.06	
	2 462	-14.35	-12.40	-15.58	
802.11n HT40	2 422	-16.72	-17.01	-14.87	
	2 437	-13.95	-13.65	-13.06	
	2 452	-17.30	-18.52	-18.37	




SISO(ANT0)

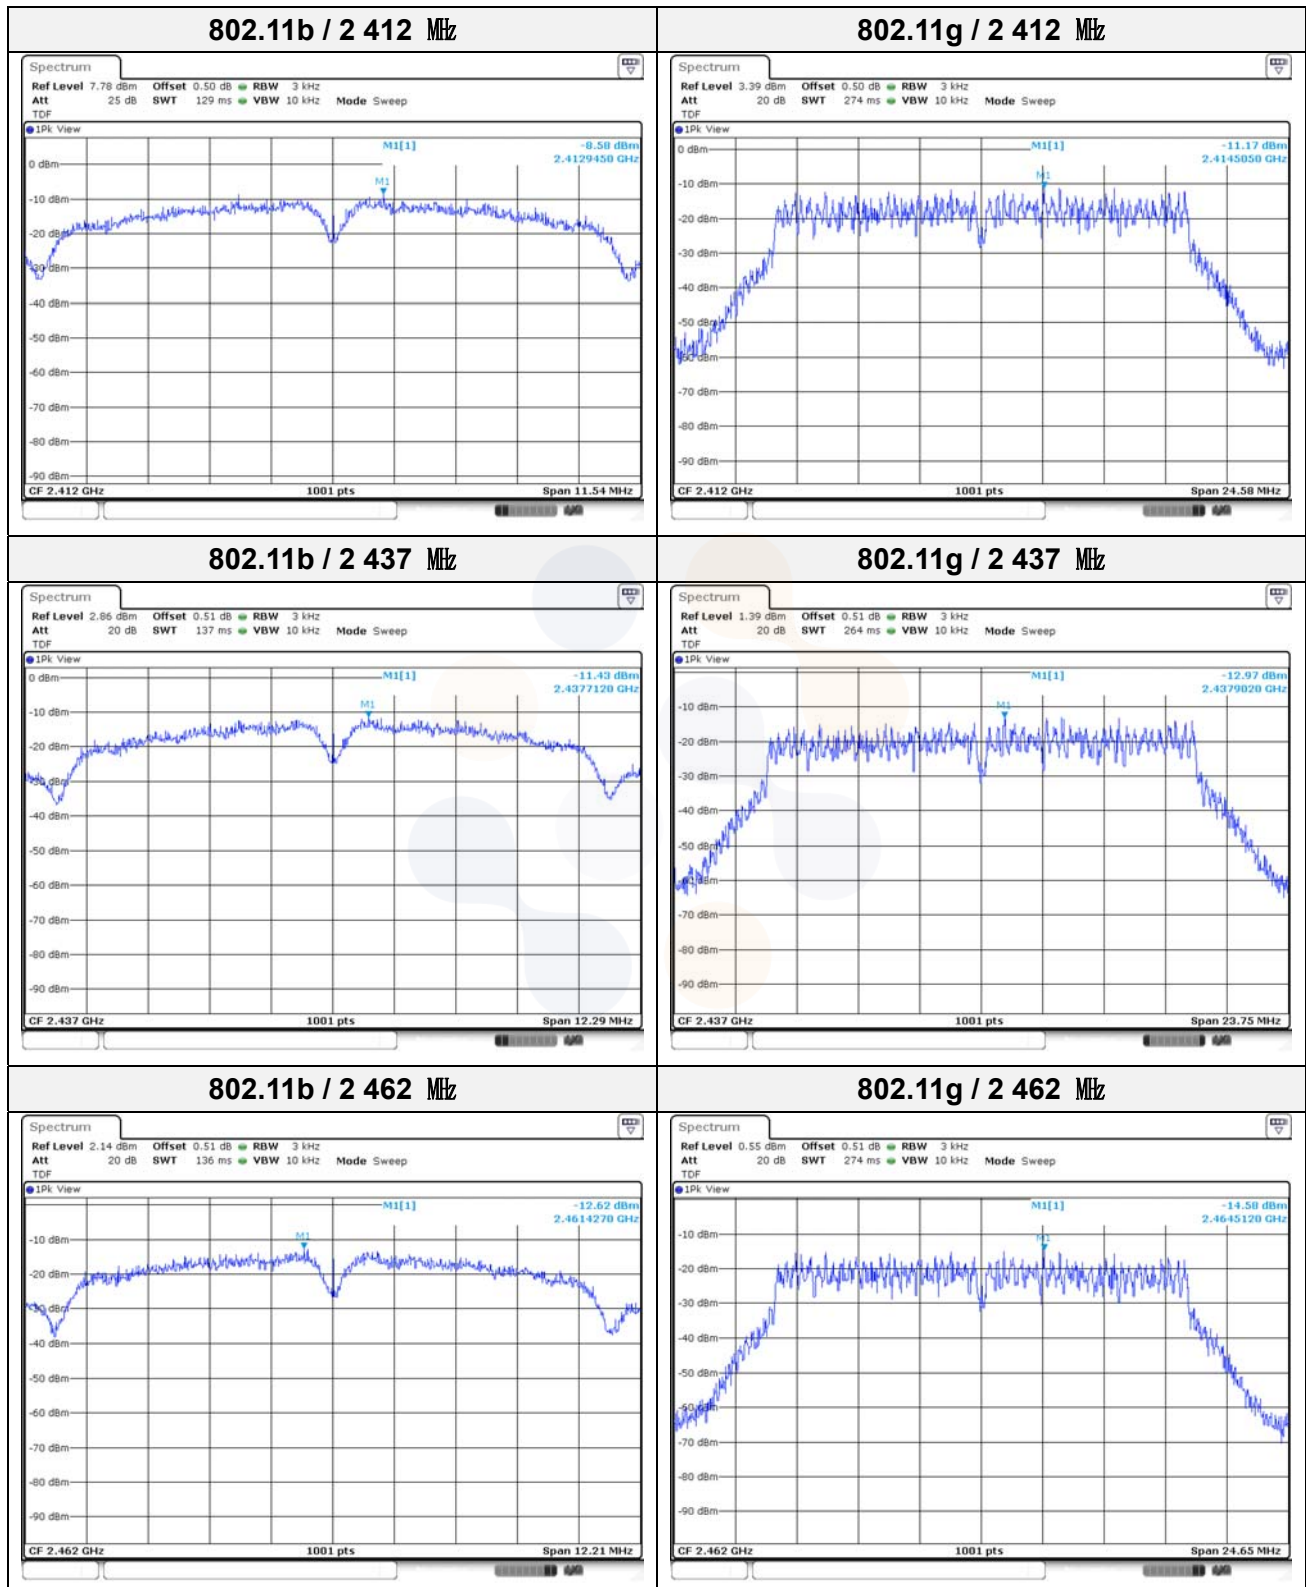


802.11n_HT20 / 2 412 MHz

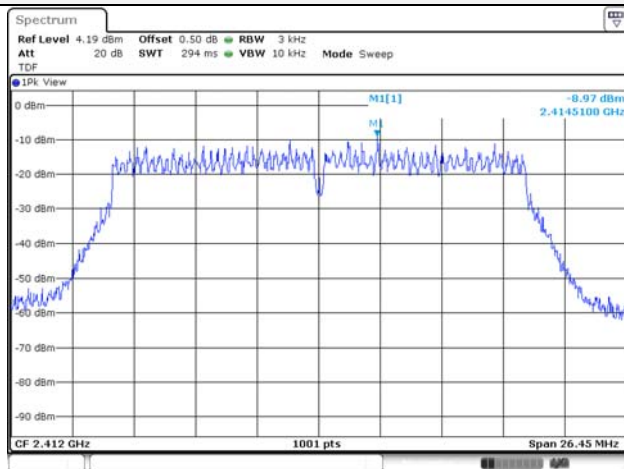


802.11n_HT40 / 2 422 MHz

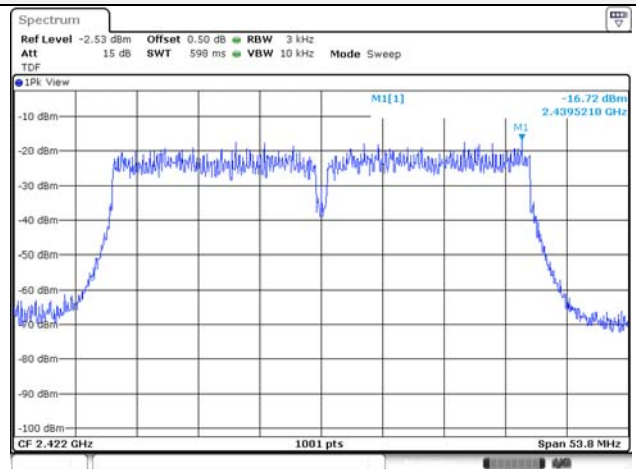


802.11n_HT20 / 2 437 MHz

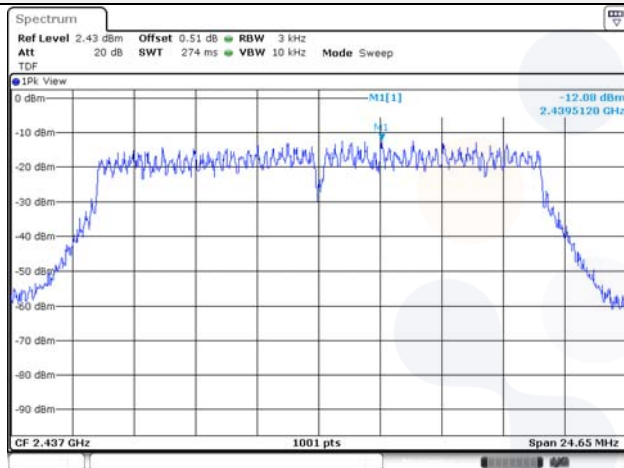


802.11n_HT40 / 2 437 MHz

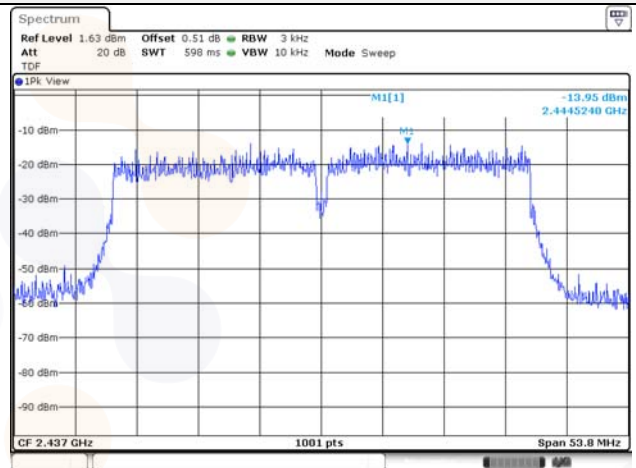


802.11n_HT20 / 2 462 MHz

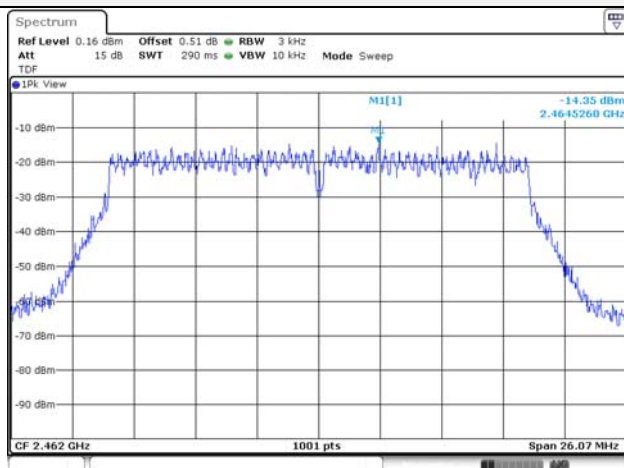


802.11n_HT40 / 2 452 MHz

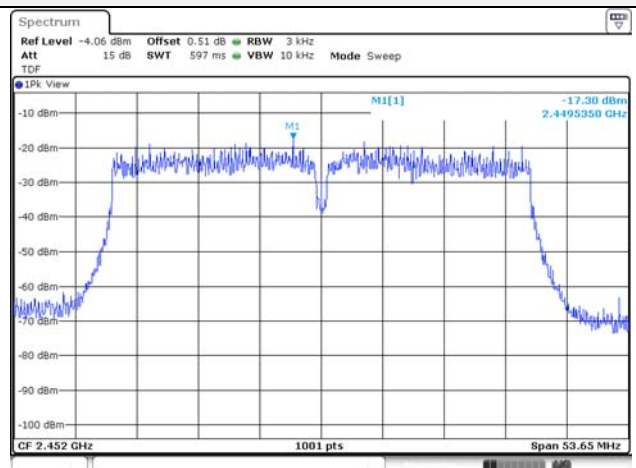


SISO(ANT1)

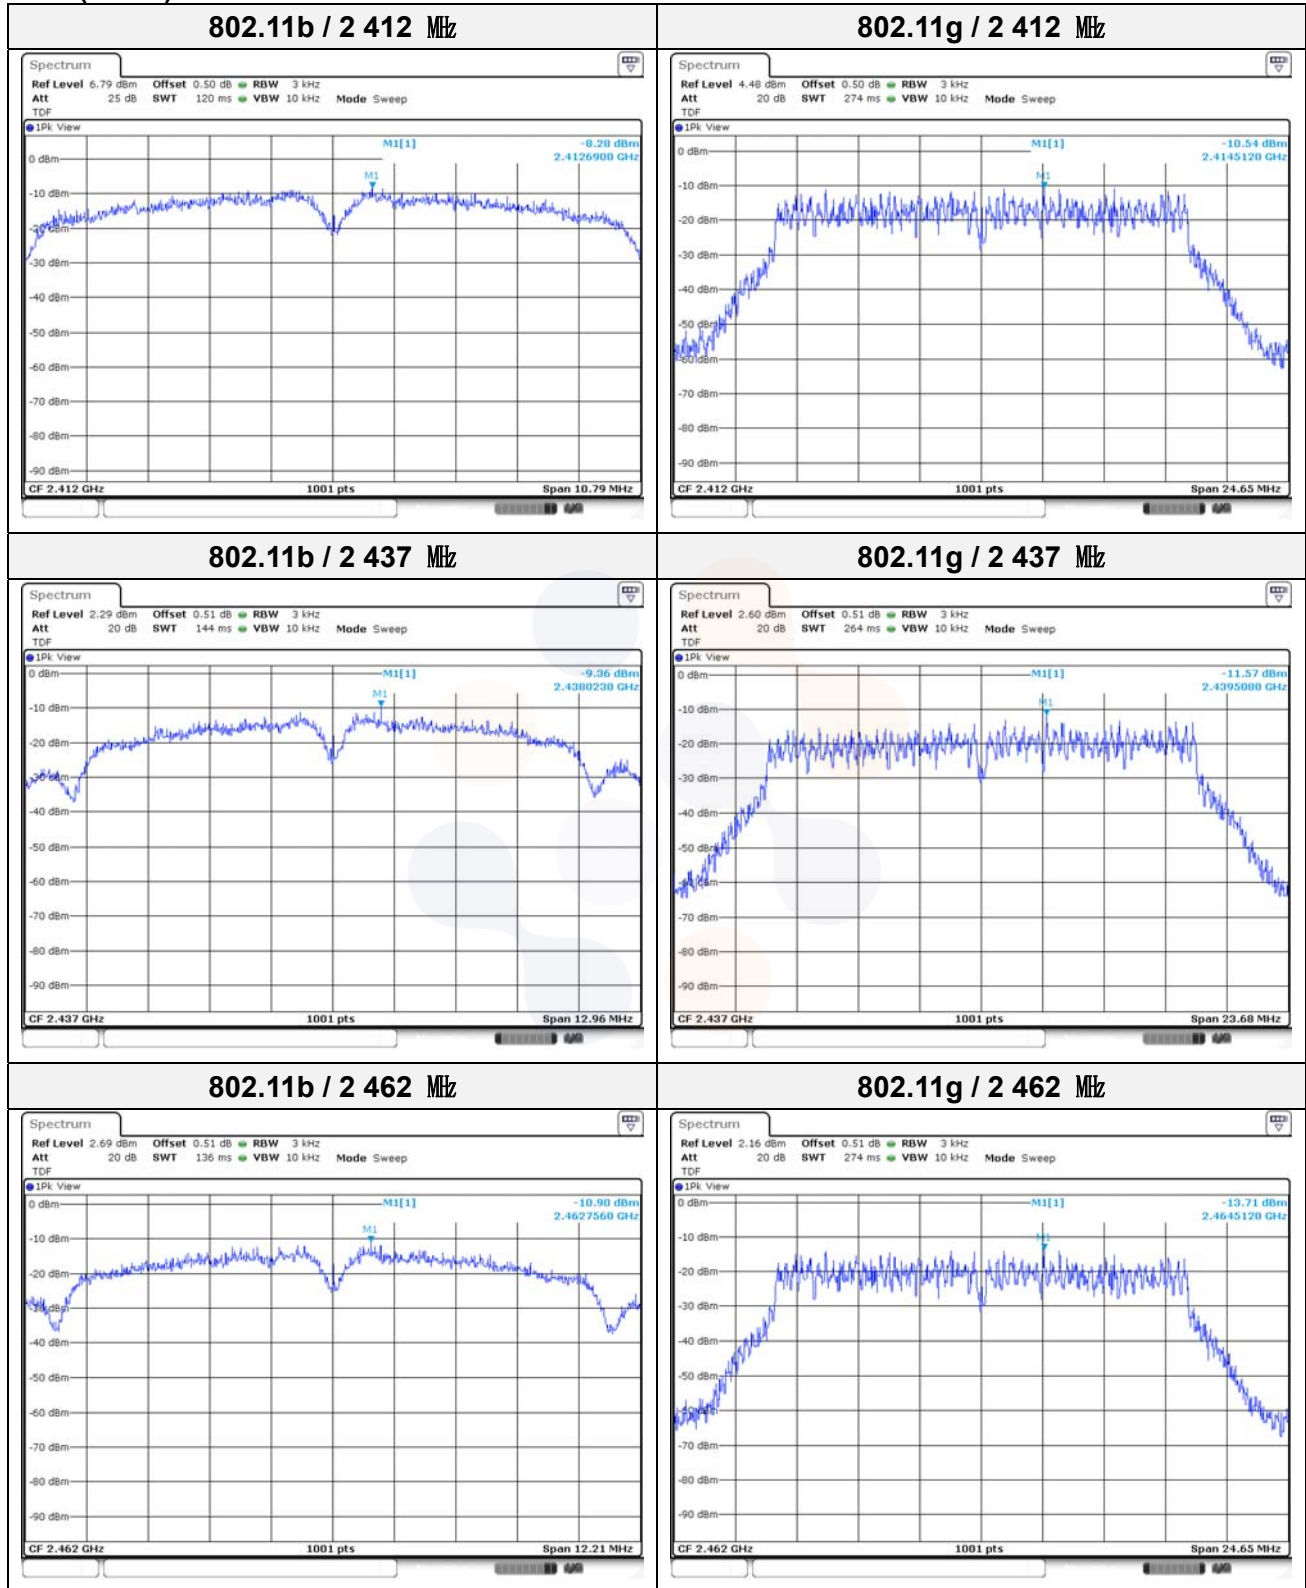


802.11n_HT20 / 2 412 MHz

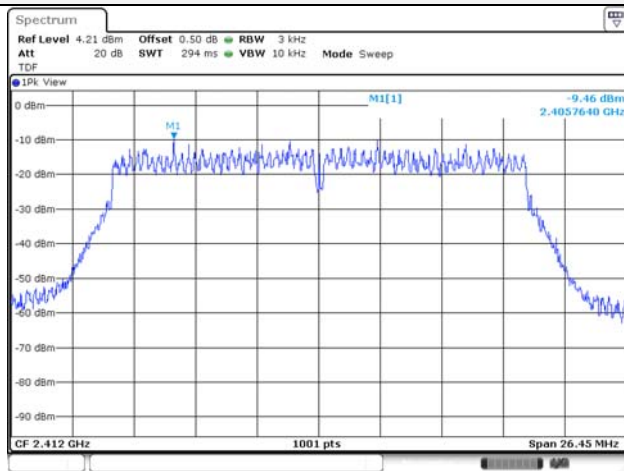


802.11n_HT40 / 2 422 MHz

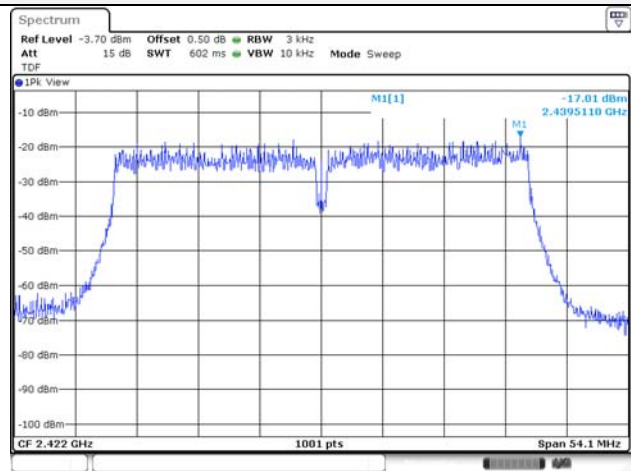


802.11n_HT20 / 2 437 MHz

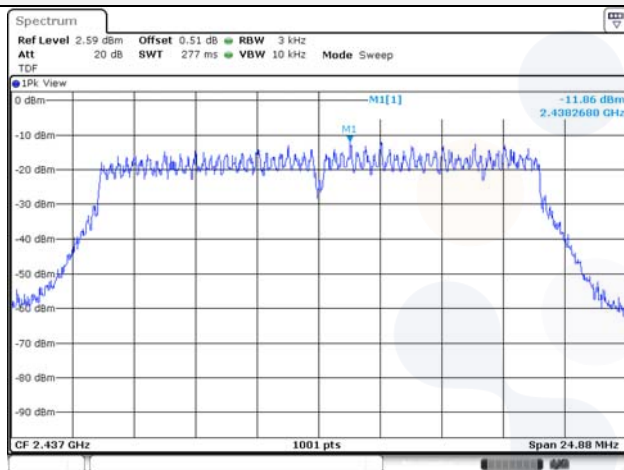


802.11n_HT40 / 2 437 MHz

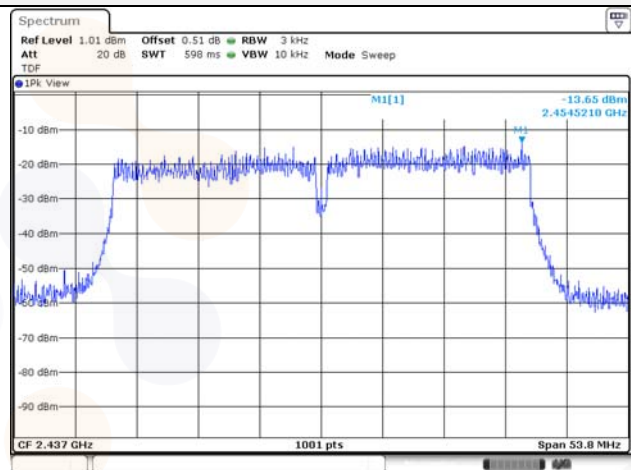


802.11n_HT20 / 2 462 MHz

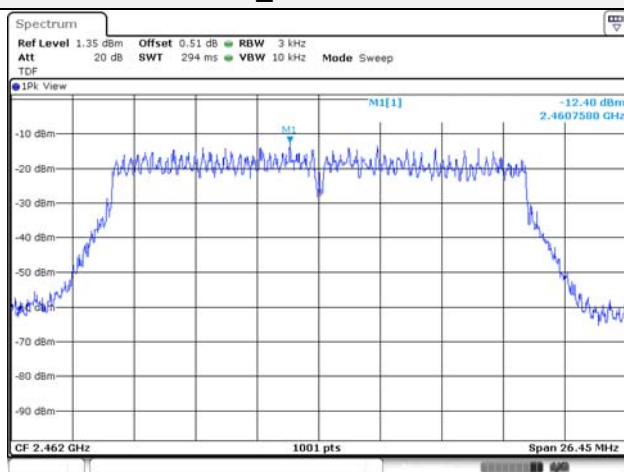


802.11n_HT40 / 2 452 MHz

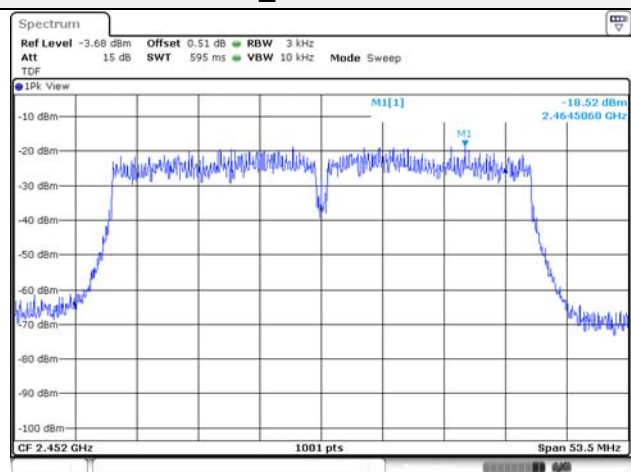


SISO(ANT2)

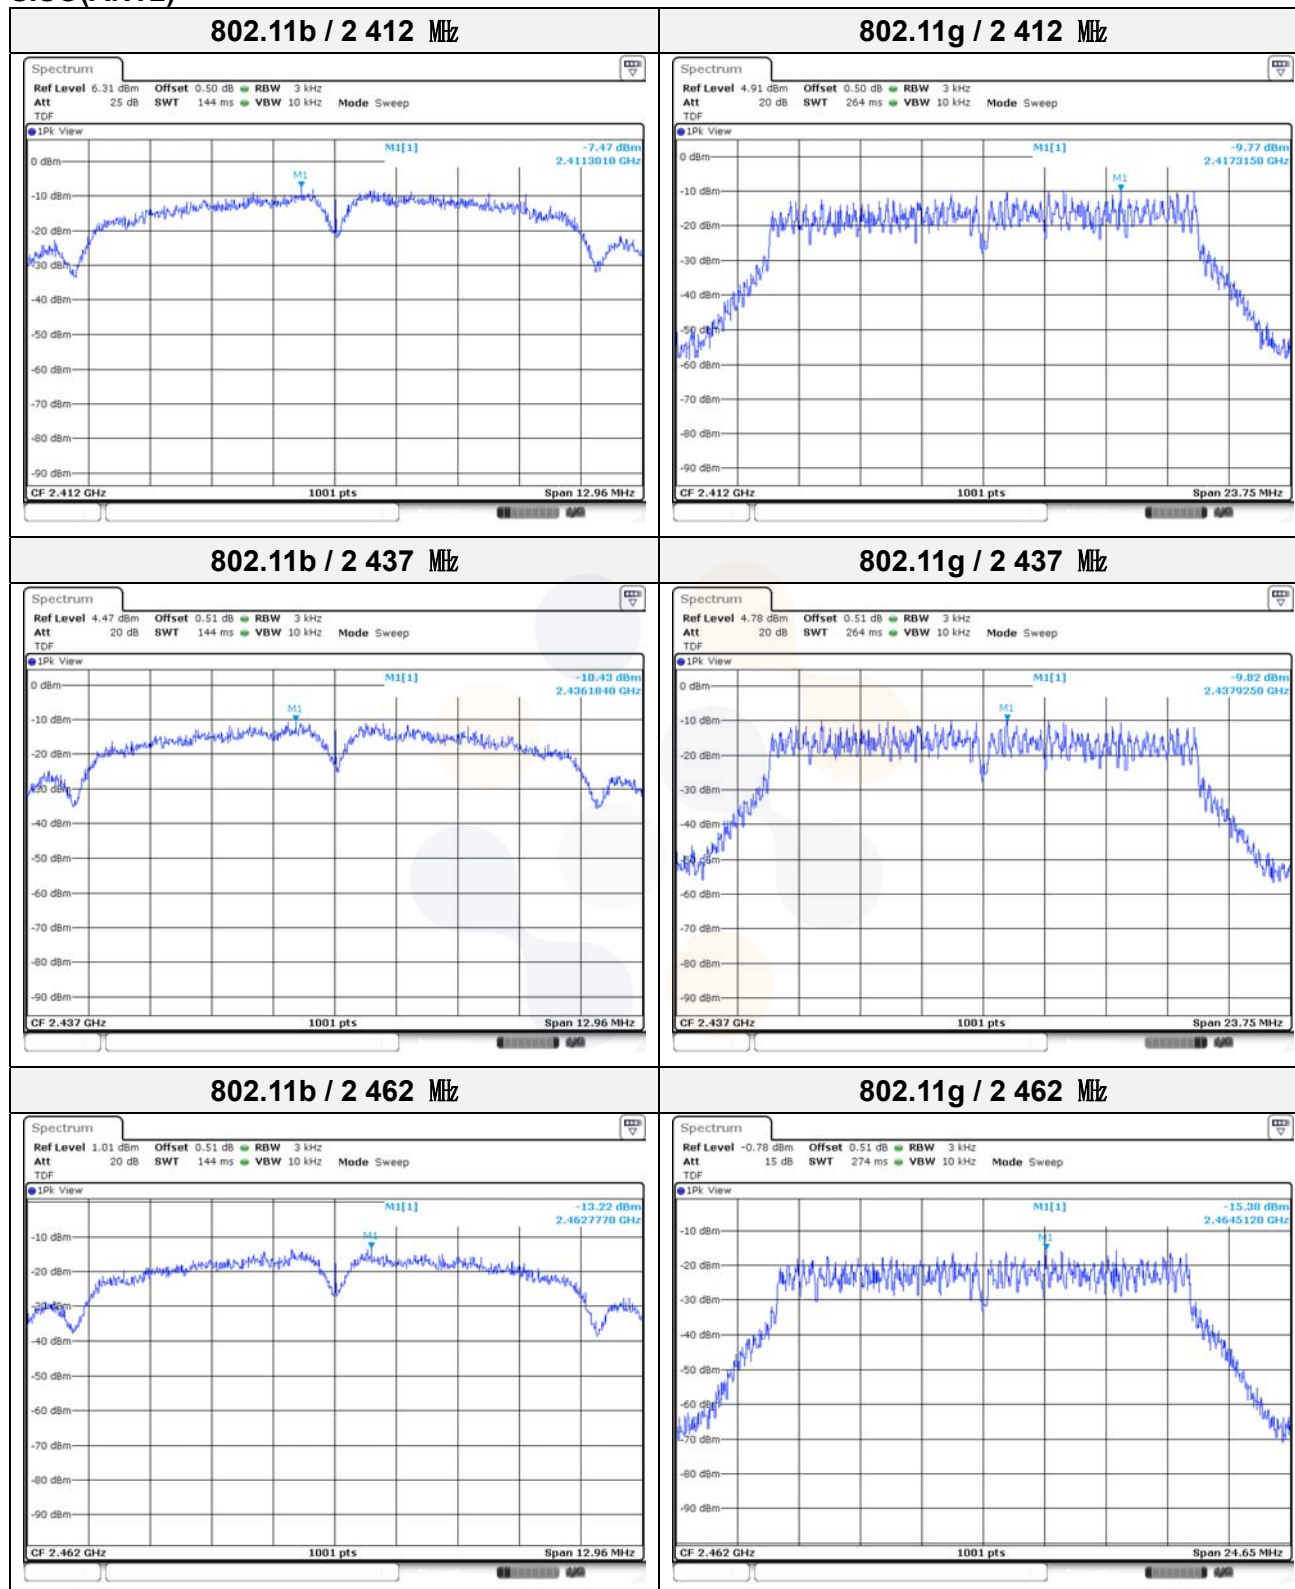


802.11n_HT20 / 2 412 MHz

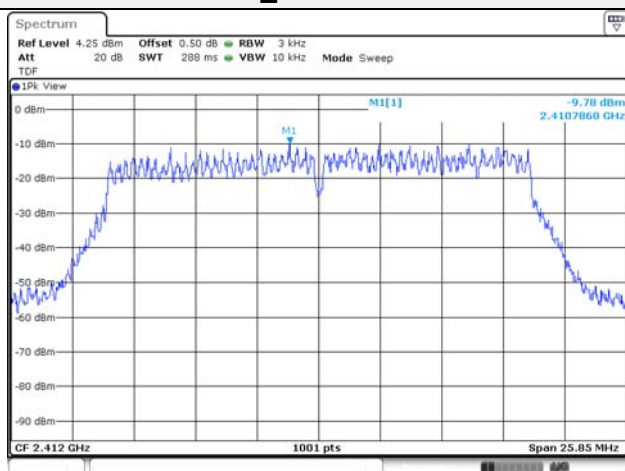


802.11n_HT40 / 2 422 MHz

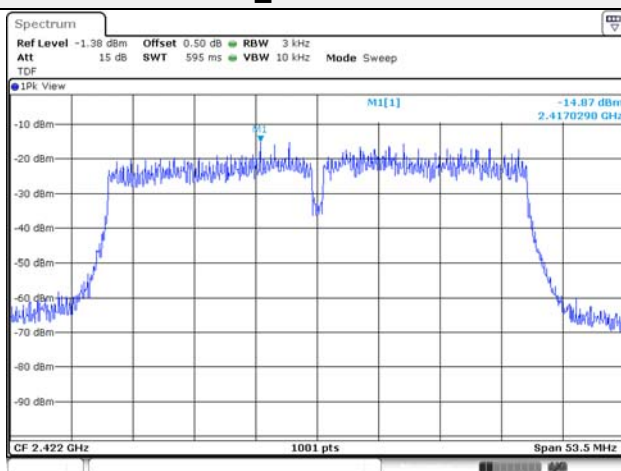


802.11n_HT20 / 2 437 MHz

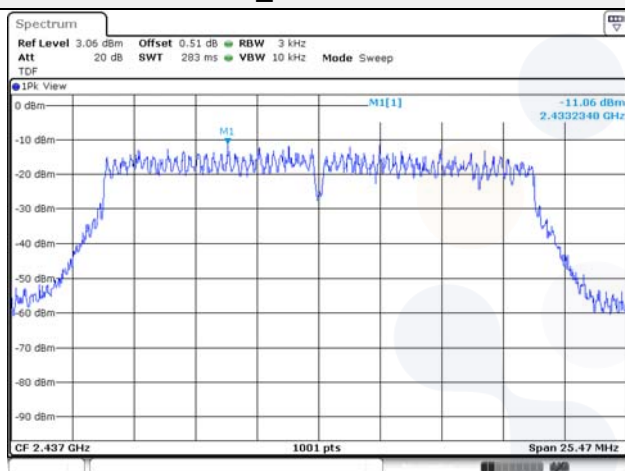


802.11n_HT40 / 2 437 MHz

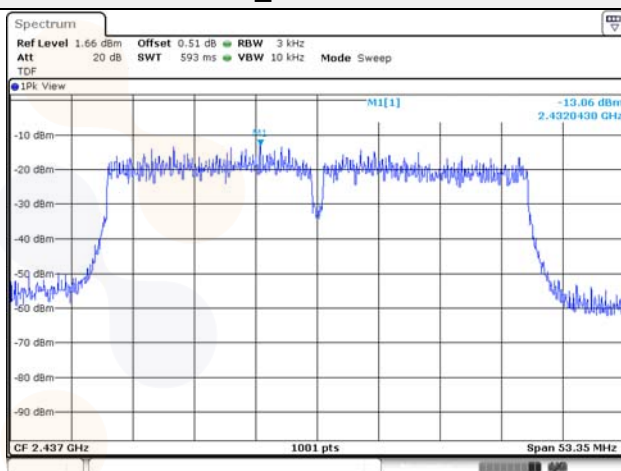

802.11n_HT20 / 2 462 MHz

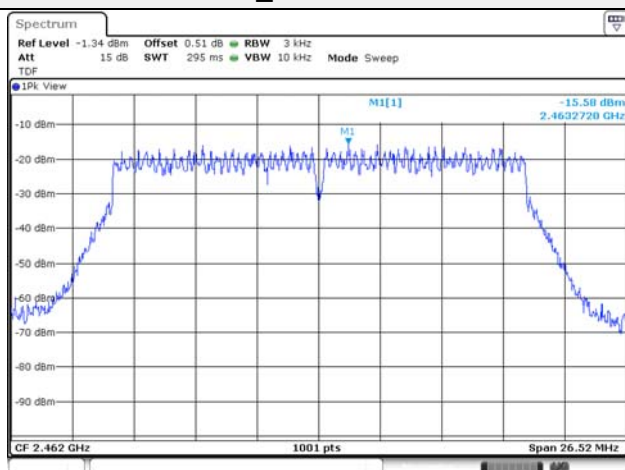

802.11n_HT40 / 2 452 MHz

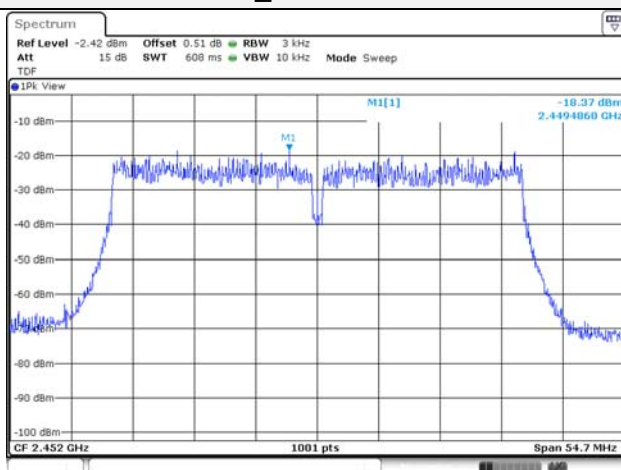


MIMO

Test mode	Frequency (MHz)	Power Spectral Density				Limit (dBm/3 kHz)
		Result (dBm/3 kHz)				
		ANT 0	ANT 1	ANT 2	MIMO	
802.11b	2 412	-7.10	-7.23	-5.56	-1.79	7.33
	2 437	-10.33	-10.52	-9.65	-5.38	
	2 462	-11.26	-10.14	-12.89	-6.52	
802.11g	2 412	-14.50	-14.29	-12.65	-8.96	
	2 437	-13.08	-13.43	-13.05	-8.41	
	2 462	-15.68	-14.92	-16.16	-10.79	
802.11n HT20	2 412	-13.19	-13.40	-12.81	-8.36	
	2 437	-11.36	-12.76	-12.26	-7.32	
	2 462	-15.07	-12.74	-16.25	-9.66	
802.11n HT40	2 422	-17.04	-17.44	-14.80	-11.49	
	2 437	-15.51	-15.42	-15.93	-10.84	
	2 452	-16.43	-15.27	-17.09	-11.43	


Notes:

1. MIMO = $10\log(10^{(Ant0/10)} + 10^{(ant1/10)} + 10^{(ant2/10)})$ (dB m)


MIMO(ANT0)

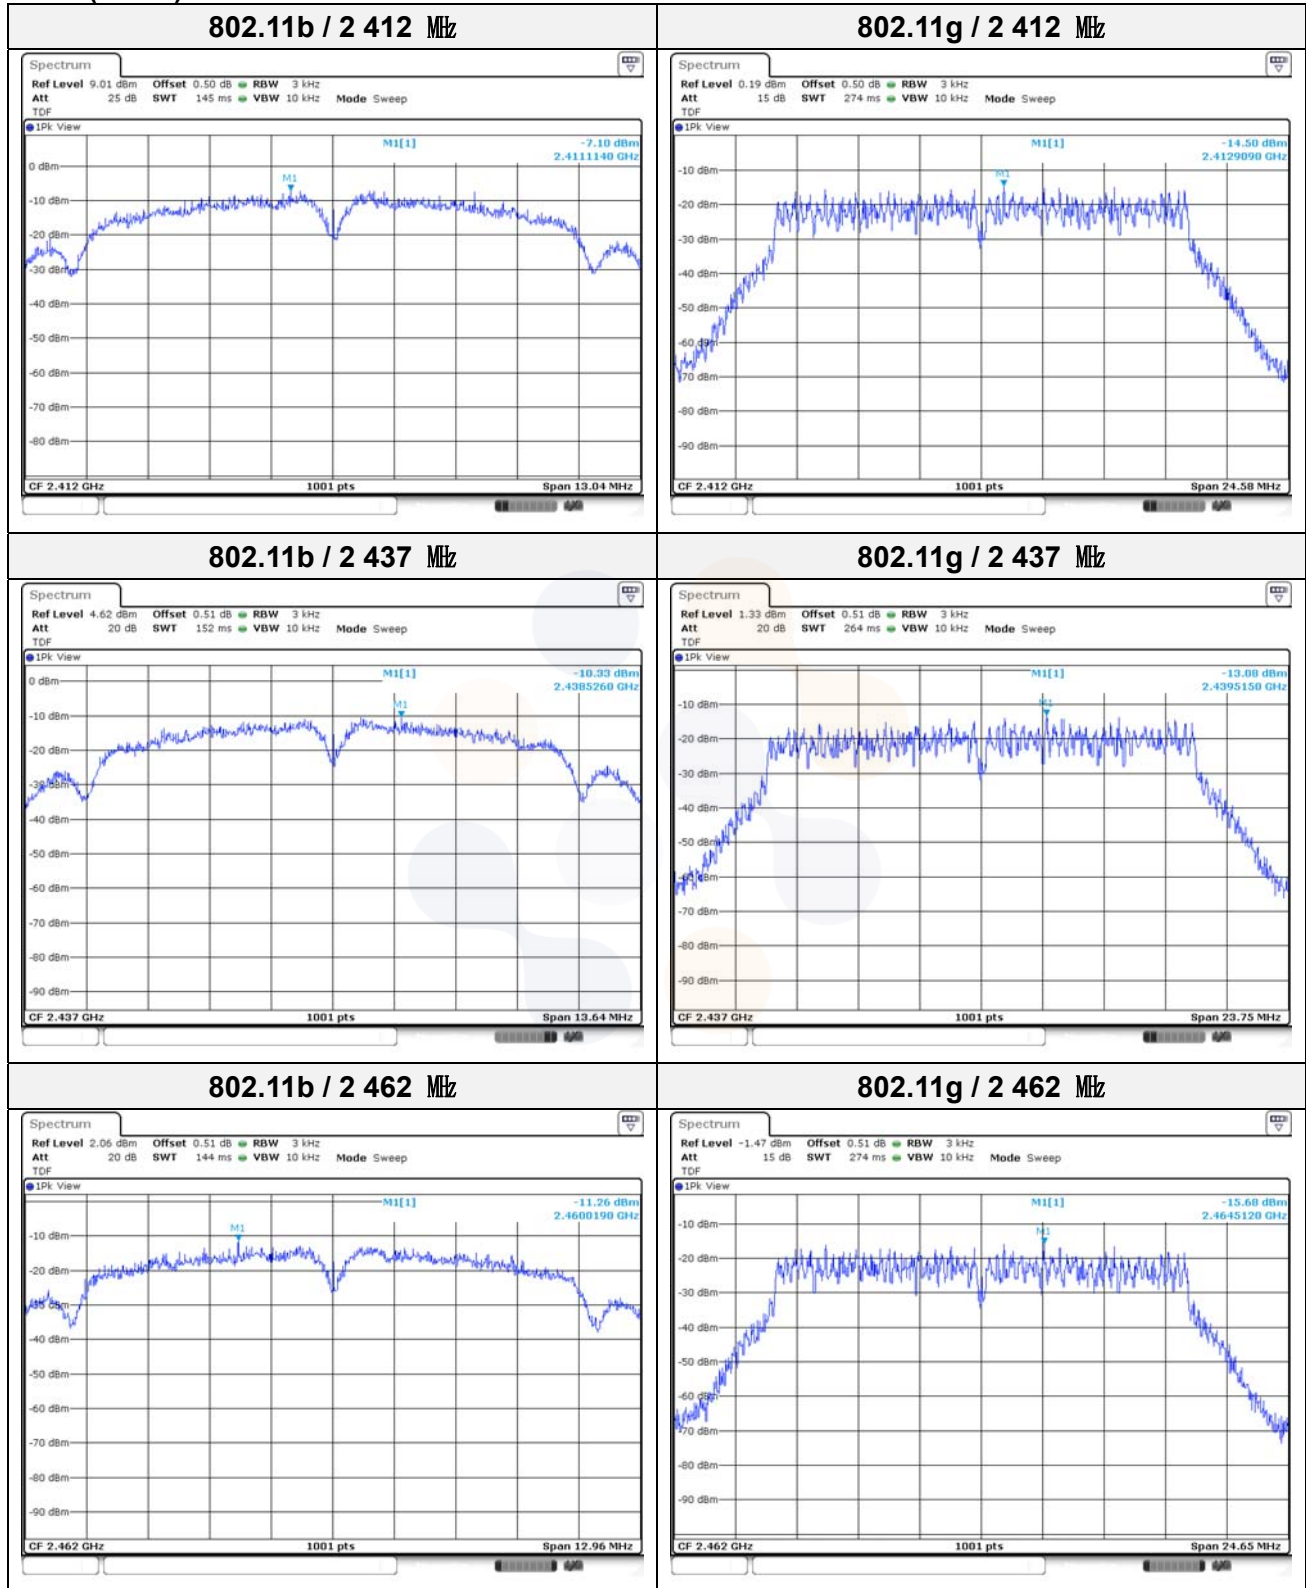

802.11n_HT20 / 2 412 MHz

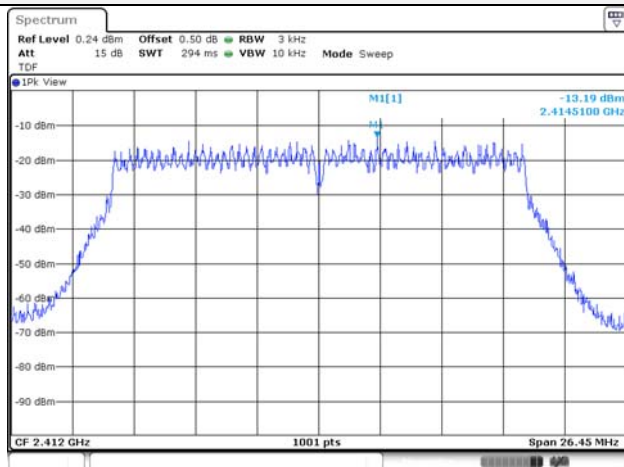


802.11n_HT40 / 2 422 MHz

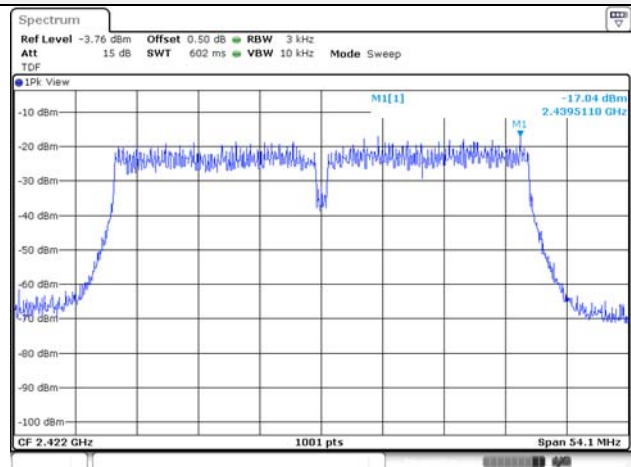


802.11n_HT20 / 2 437 MHz




802.11n_HT40 / 2 437 MHz

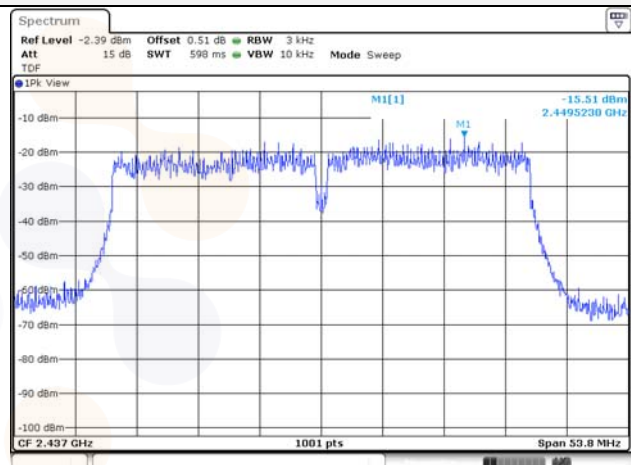


802.11n_HT20 / 2 462 MHz

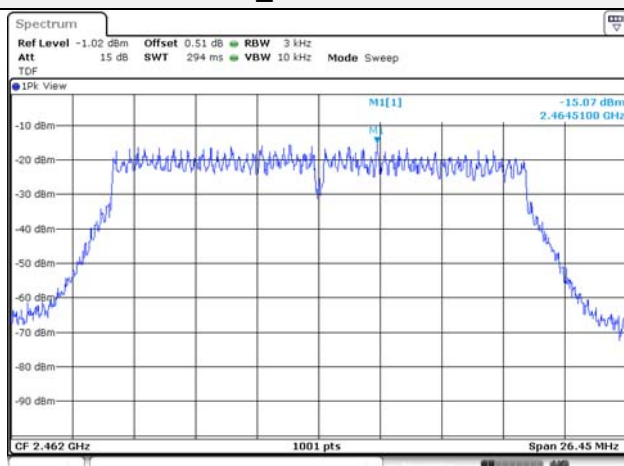


802.11n_HT40 / 2 452 MHz

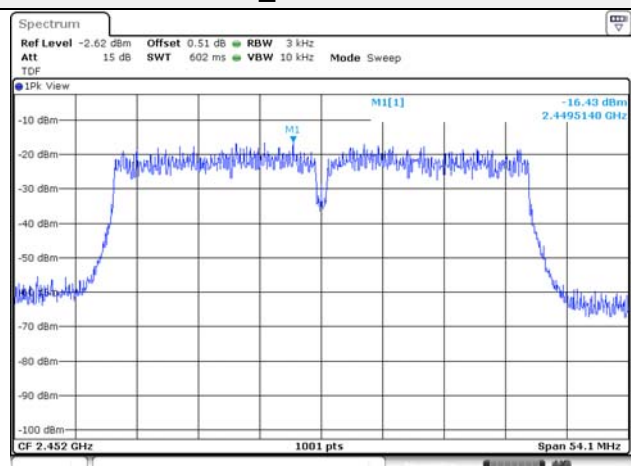


MIMO(ANT1)

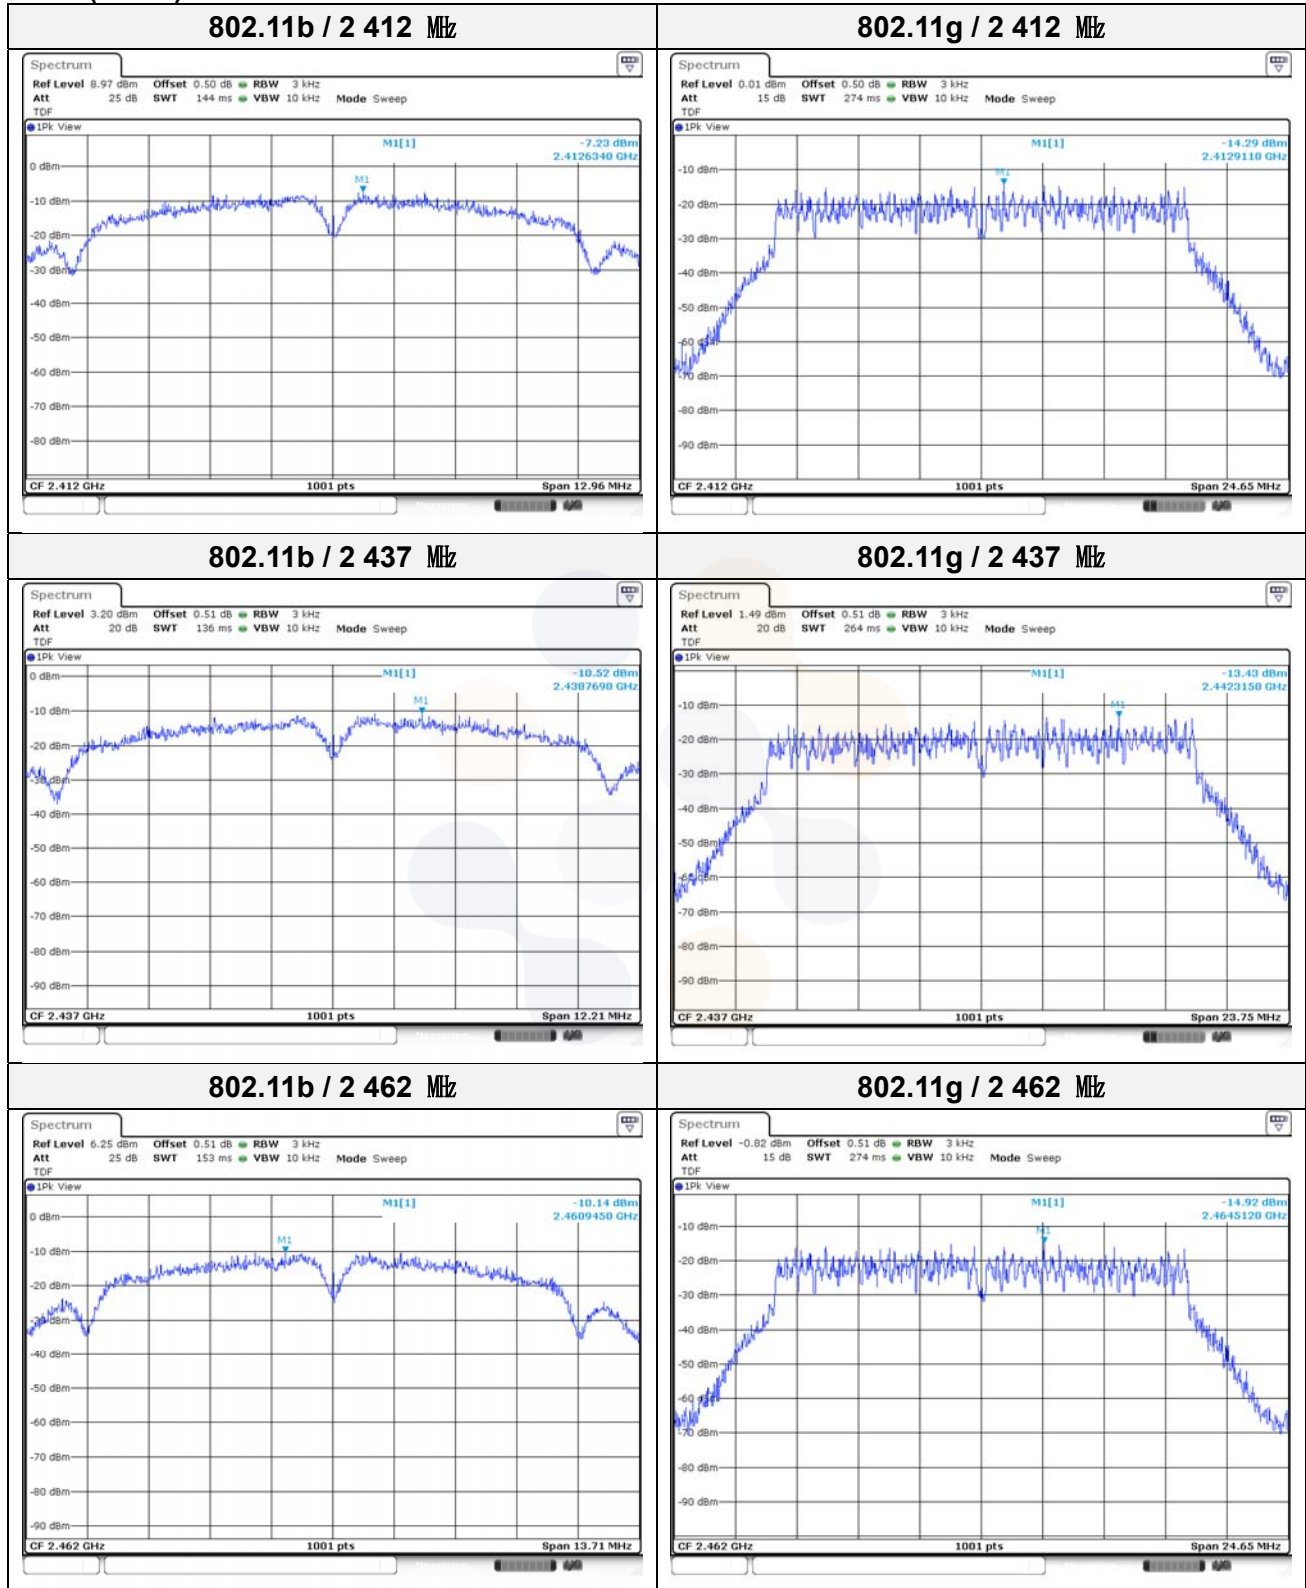


802.11n_HT20 / 2 412 MHz

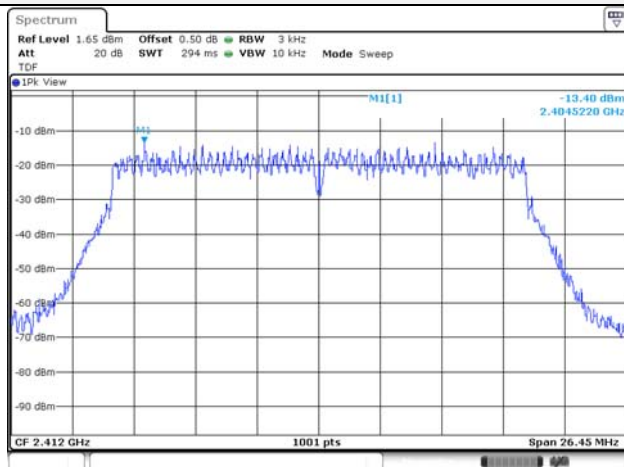


802.11n_HT40 / 2 422 MHz

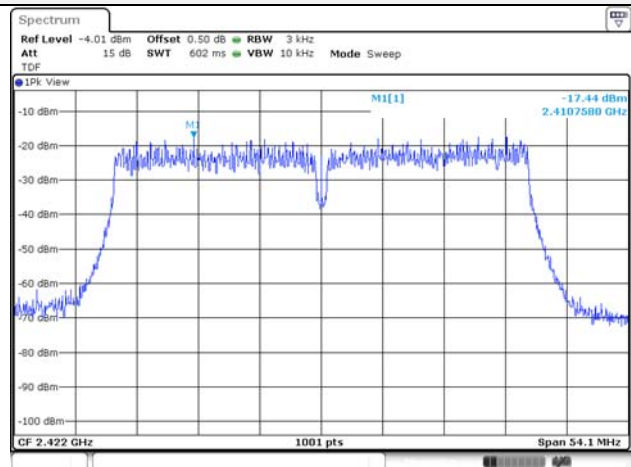


802.11n_HT20 / 2 437 MHz

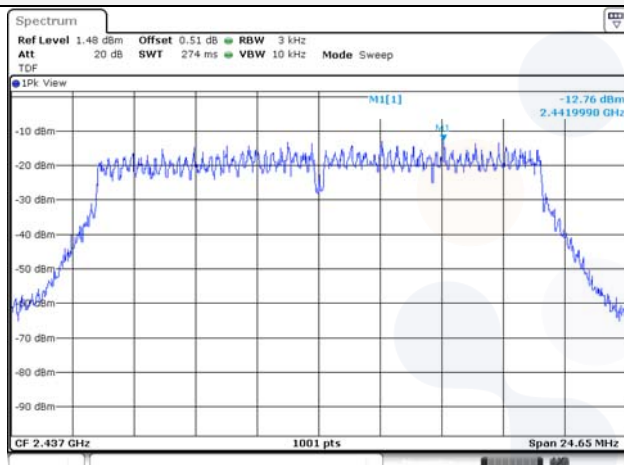


802.11n_HT40 / 2 437 MHz

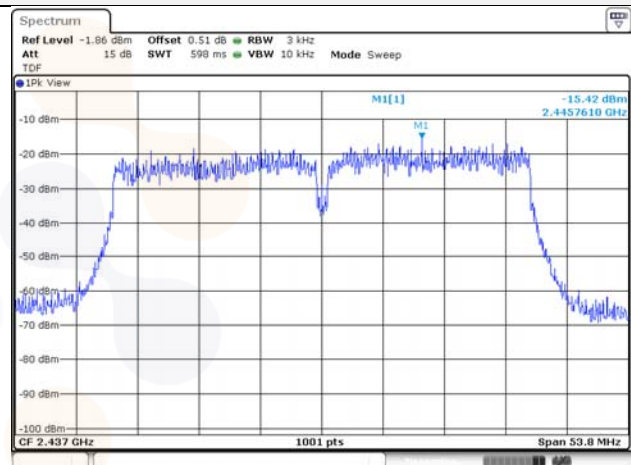


802.11n_HT20 / 2 462 MHz

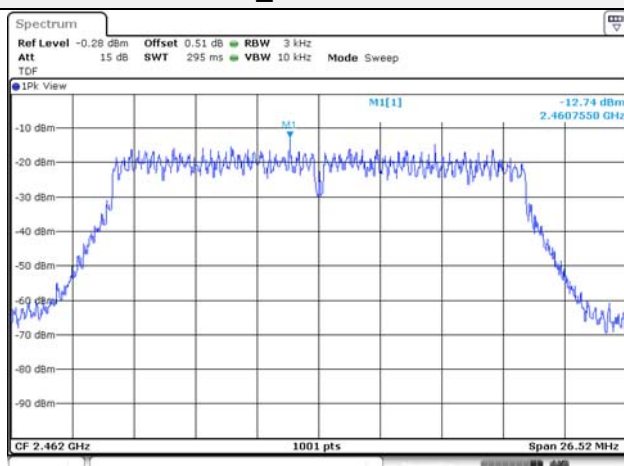


802.11n_HT40 / 2 452 MHz

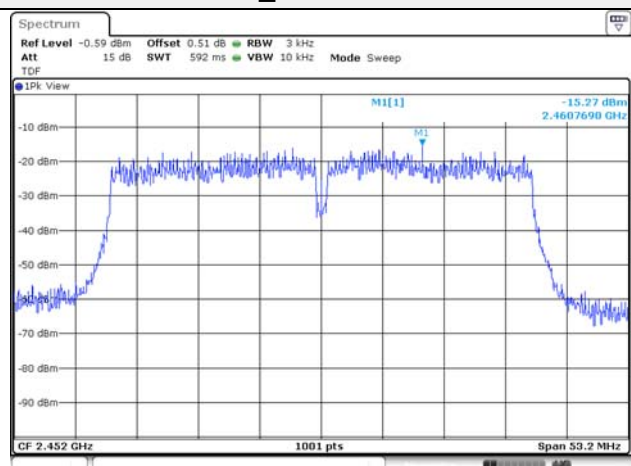


MIMO(ANT2)

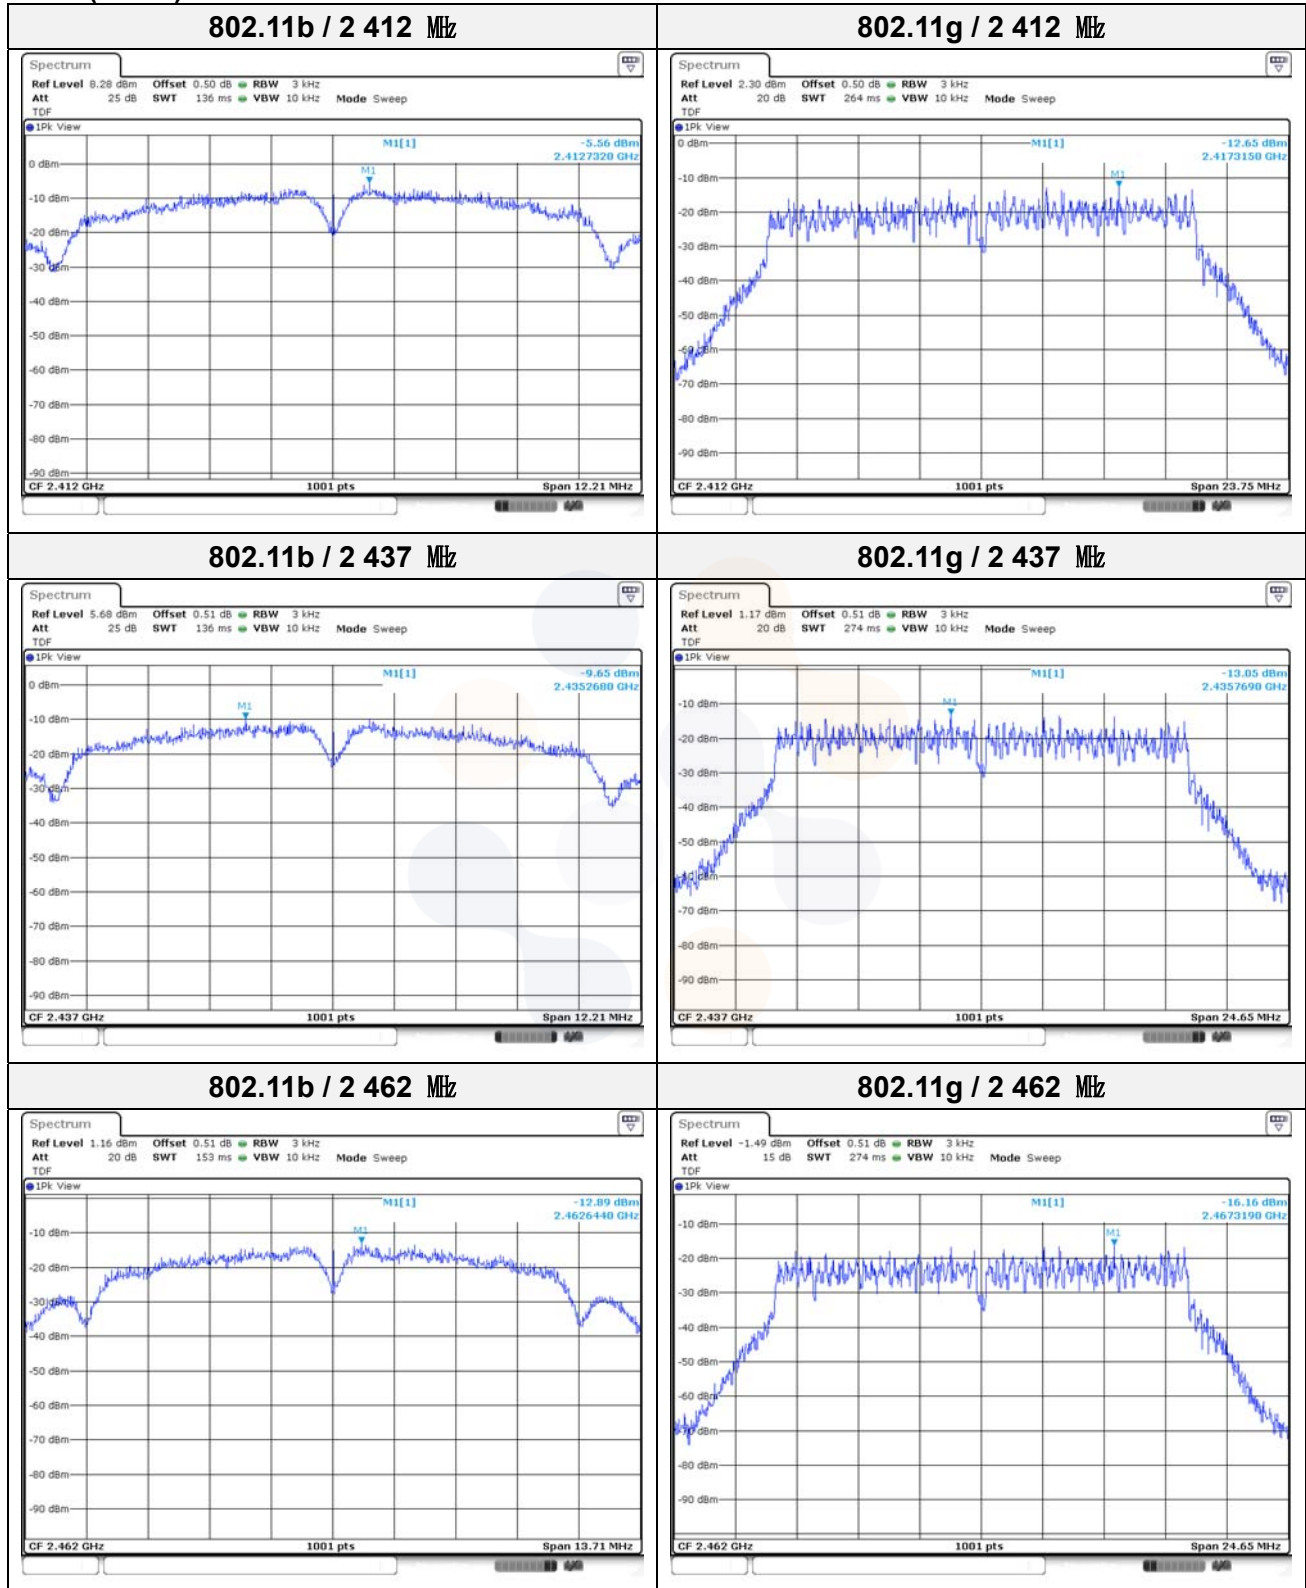


802.11n_HT20 / 2 412 MHz

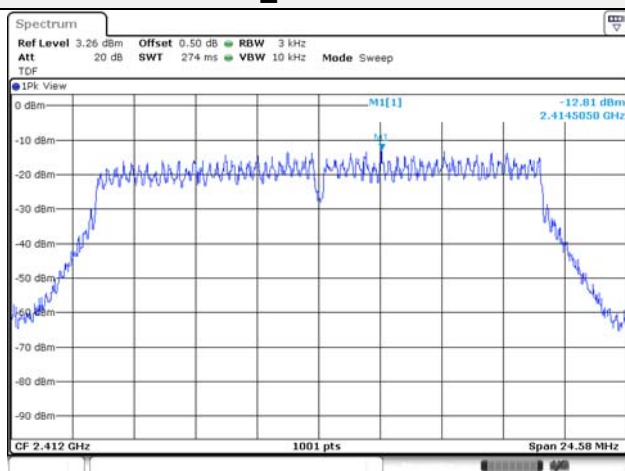


802.11n_HT40 / 2 422 MHz

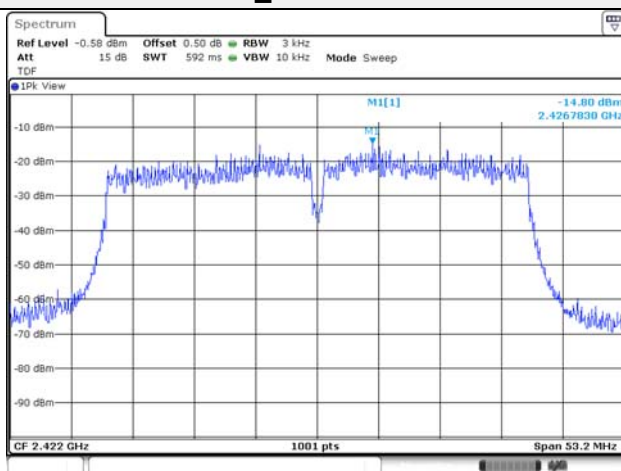


802.11n_HT20 / 2 437 MHz

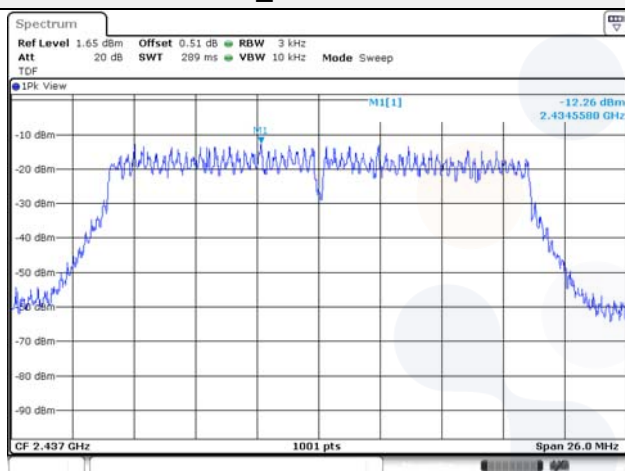


802.11n_HT40 / 2 437 MHz

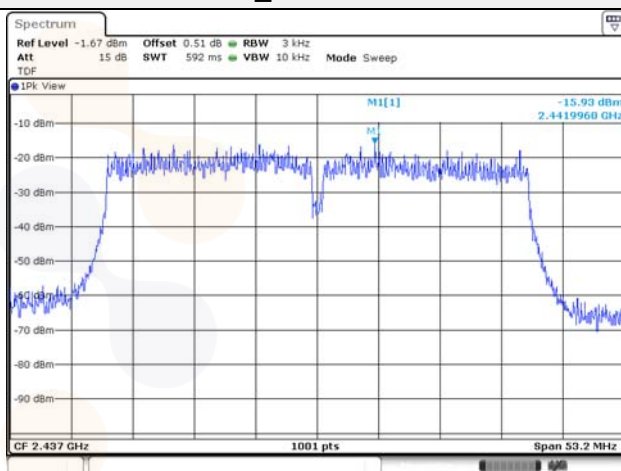

802.11n_HT20 / 2 462 MHz

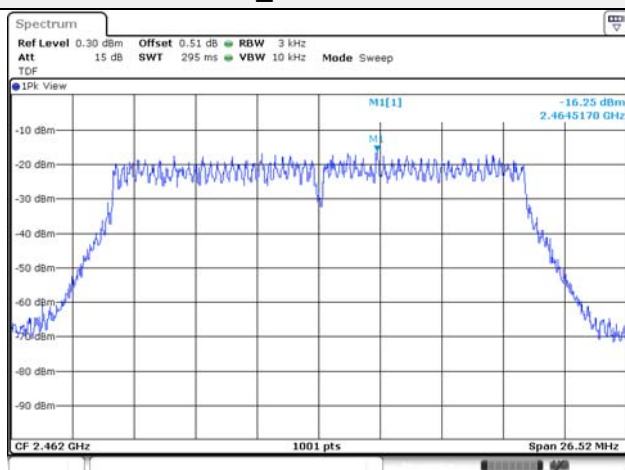


802.11n_HT40 / 2 452 MHz

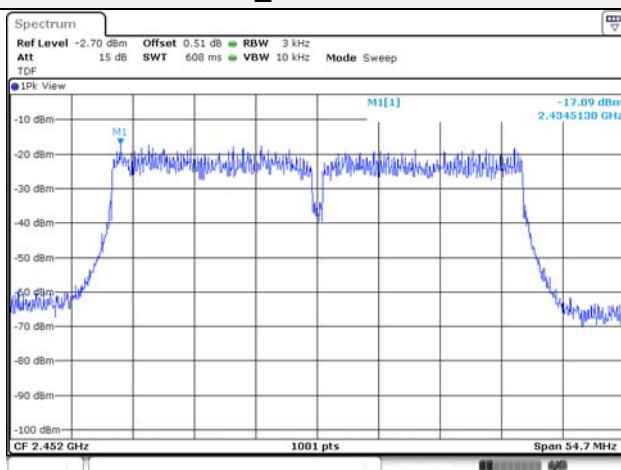

7.3. 6 dB Bandwidth(DTS Channel Bandwidth)

Test setup



Limit

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

ANSI C63.10 - Section 11.8.2

Test settings

DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


Test results

SISO


Test mode	Frequency(MHz)	6 dB bandwidth(MHz)		
		ANT 0	ANT 1	ANT 2
802.11b	2 412	7.69	7.19	8.64
	2 437	8.19	8.64	8.64
	2 462	8.14	8.14	8.64
802.11g	2 412	16.38	16.43	15.83
	2 437	15.83	15.78	15.83
	2 462	16.43	16.43	16.43
802.11n HT20	2 412	17.63	17.63	17.23
	2 437	16.43	16.58	16.98
	2 462	17.38	17.63	17.68
802.11n HT40	2 422	35.86	36.06	35.66
	2 437	35.86	35.86	35.56
	2 452	35.76	35.66	36.46

SISO(ANT0)


802.11b / 2 412 MHz

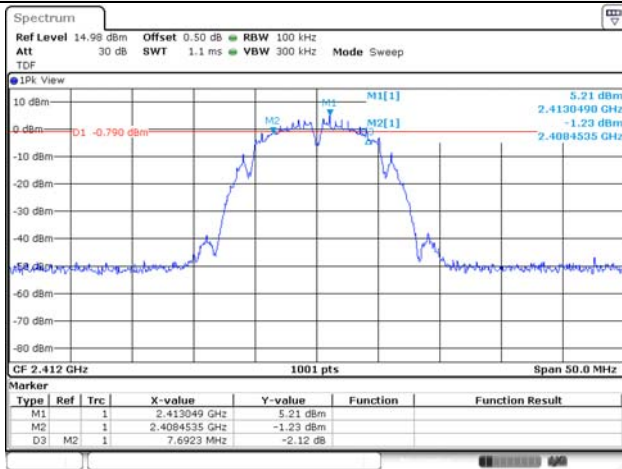


802.11g / 2 412 MHz

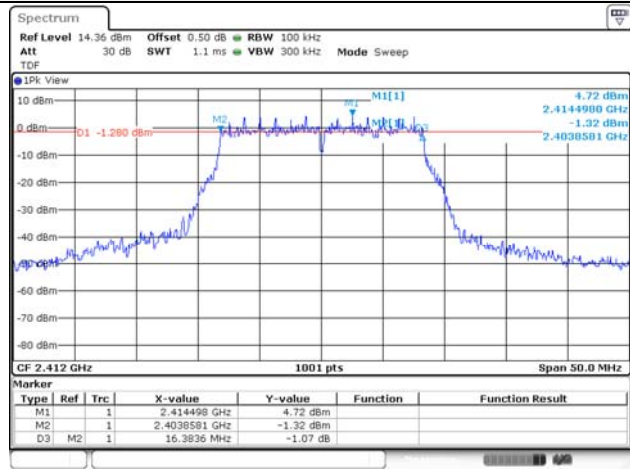


802.11b / 2 437 MHz

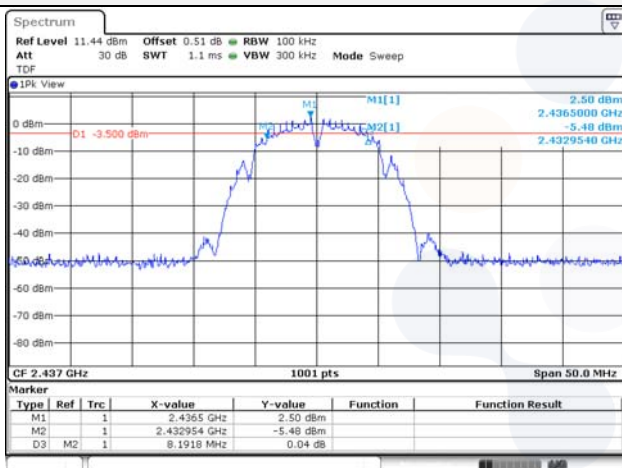


802.11g / 2 437 MHz

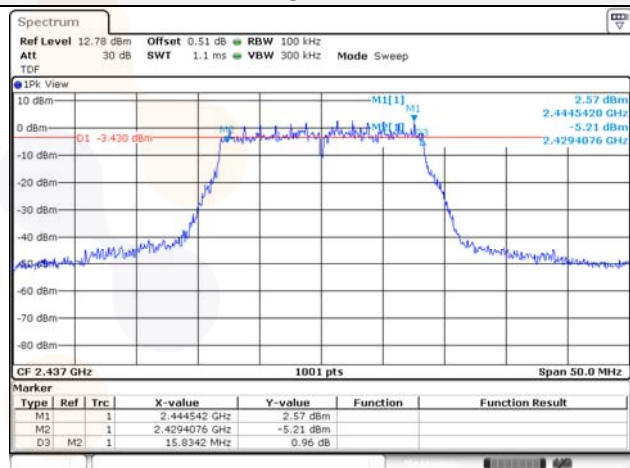


802.11b / 2 462 MHz

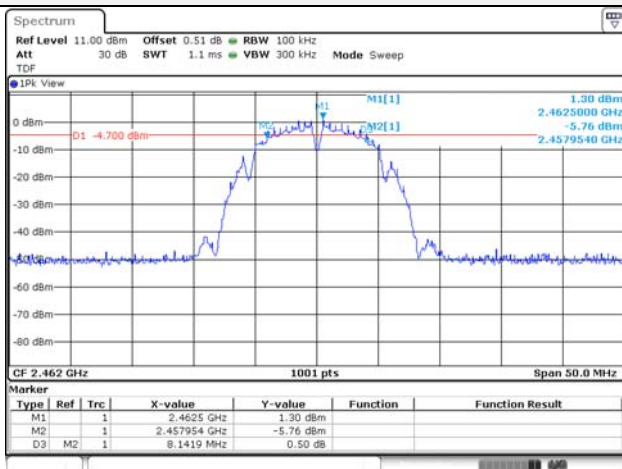


802.11g / 2 462 MHz

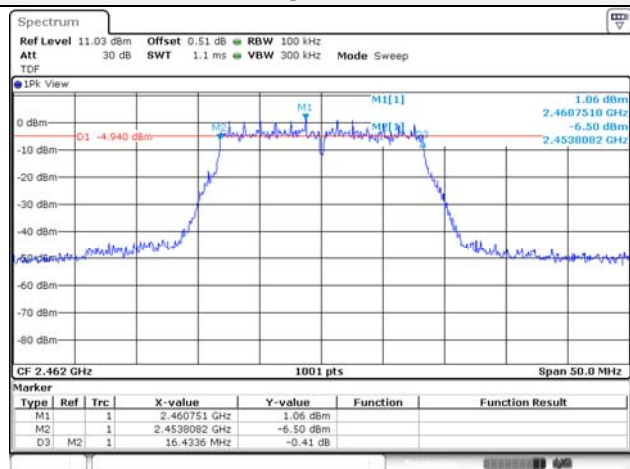


802.11n_HT20 / 2 412 MHz

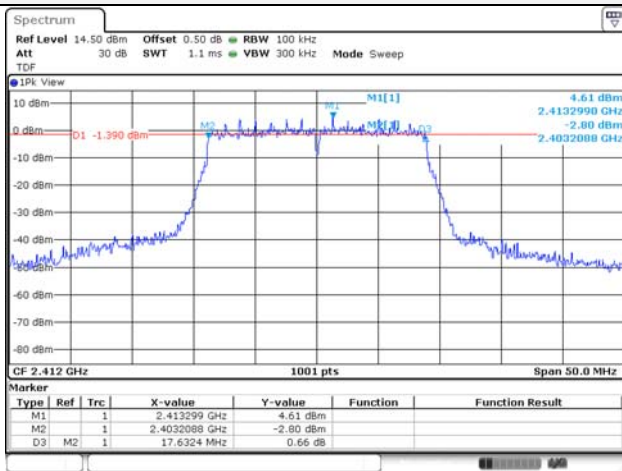


802.11n_HT40 / 2 422 MHz

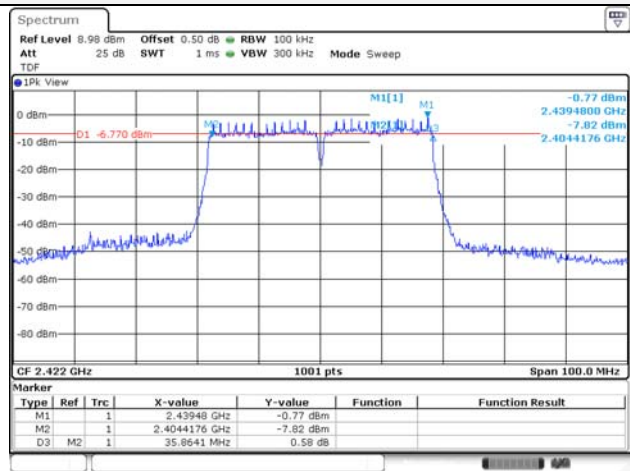


802.11n_HT20 / 2 437 MHz

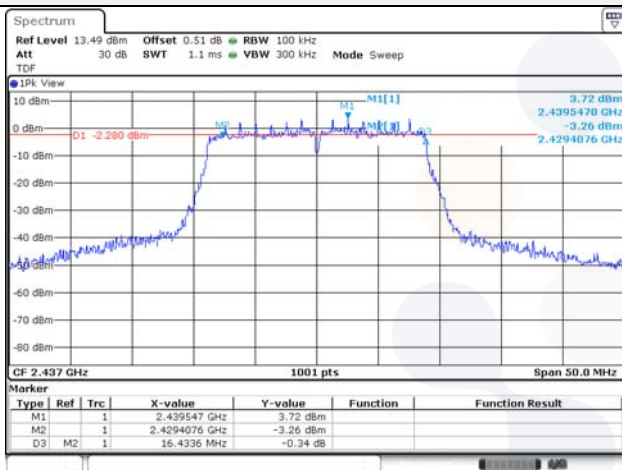


802.11n_HT40 / 2 437 MHz

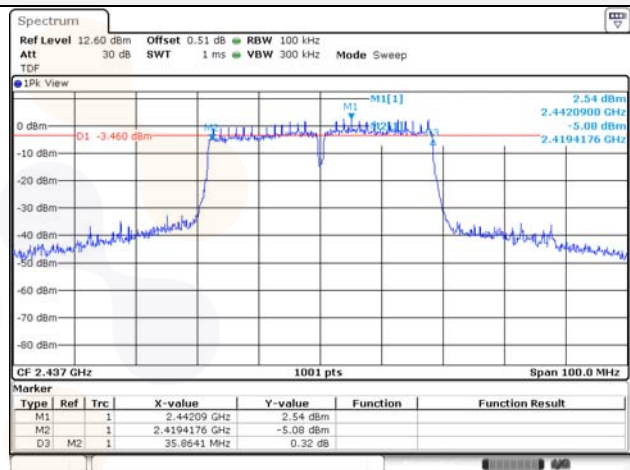

802.11n_HT20 / 2 462 MHz

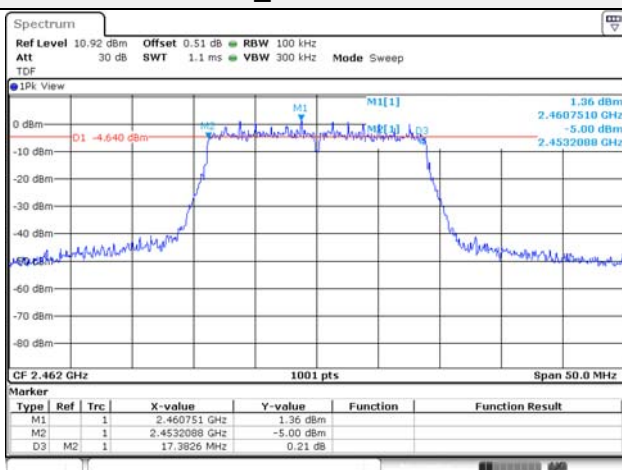


802.11n_HT40 / 2 452 MHz

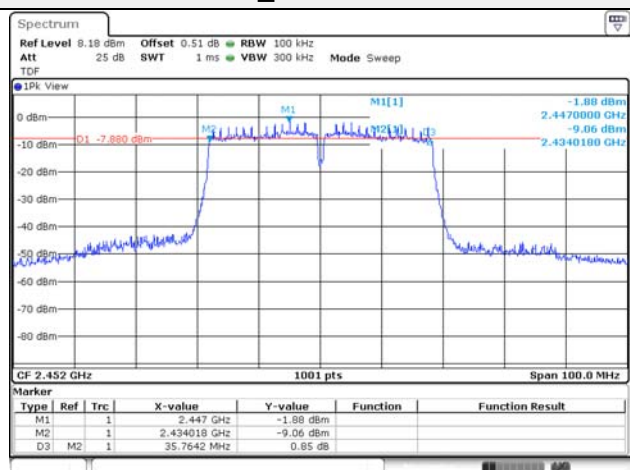


SISO(ANT1)

802.11b / 2 412 MHz

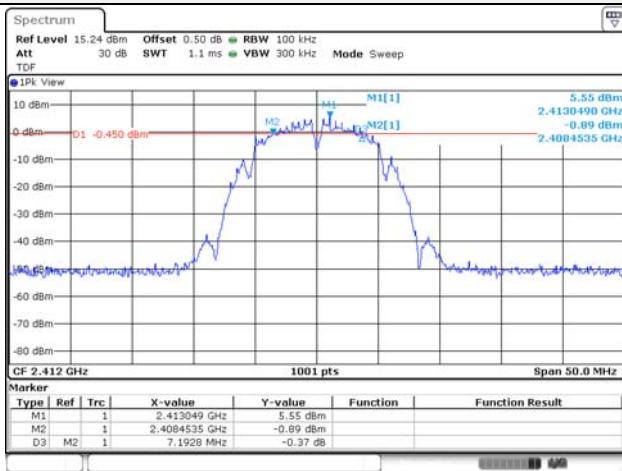


802.11g / 2 412 MHz

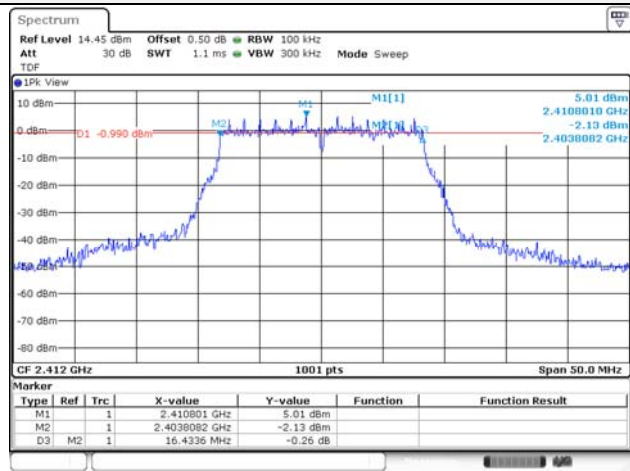


802.11b / 2 437 MHz




802.11g / 2 437 MHz

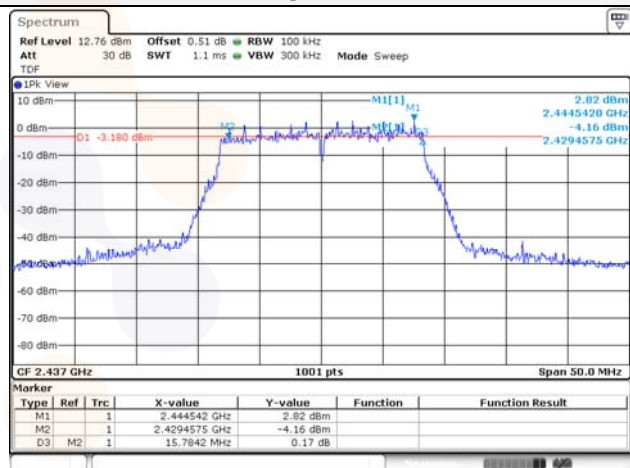


802.11b / 2 462 MHz

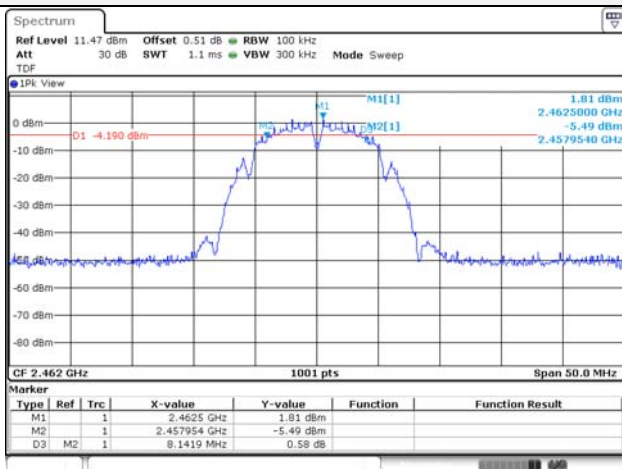


802.11g / 2 462 MHz

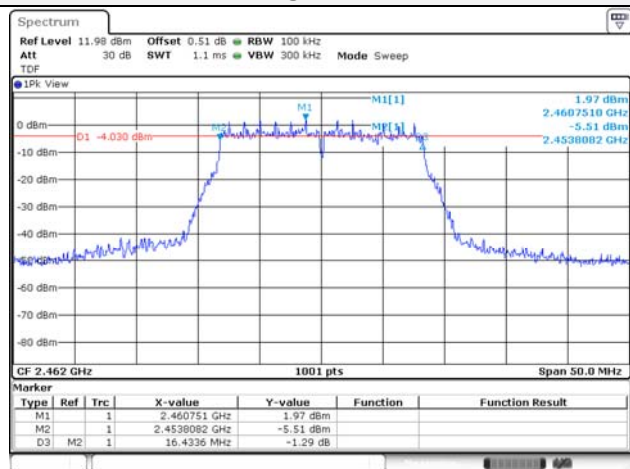


802.11n_HT20 / 2 412 MHz

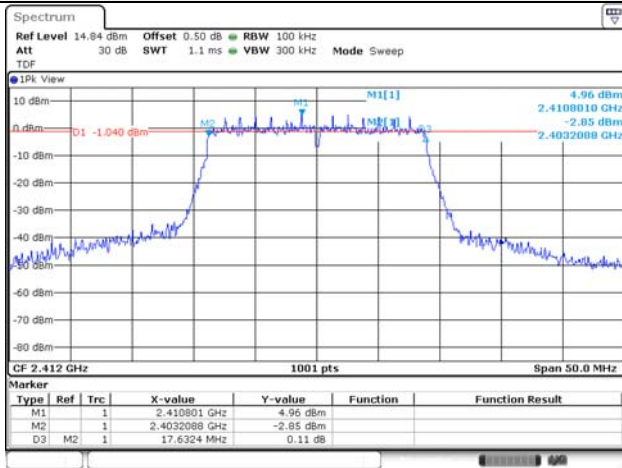


802.11n_HT40 / 2 422 MHz

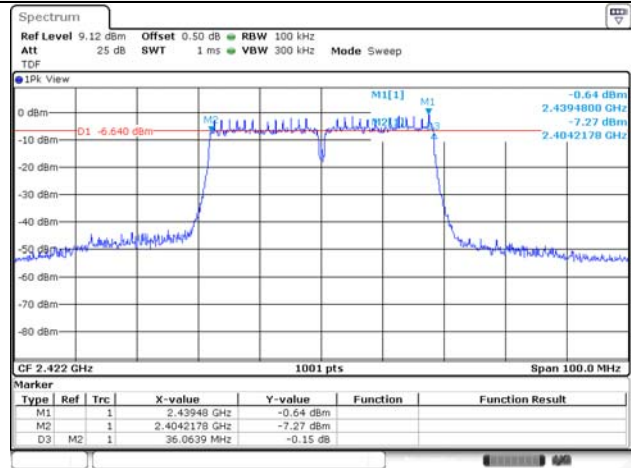


802.11n_HT20 / 2 437 MHz

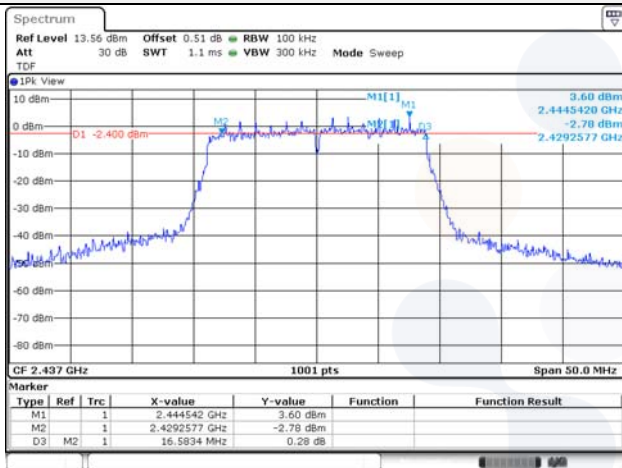


802.11n_HT40 / 2 437 MHz

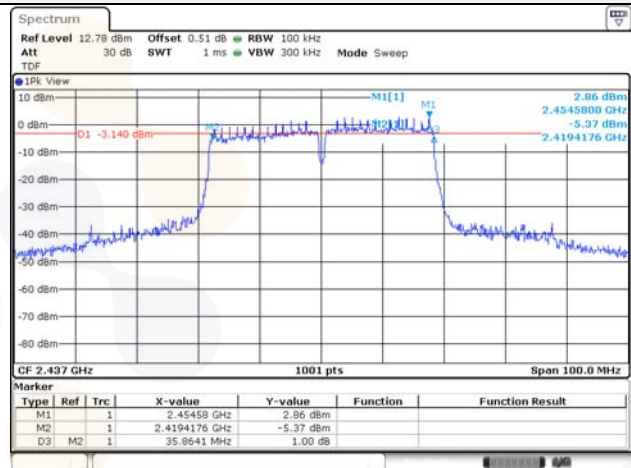

802.11n_HT20 / 2 462 MHz

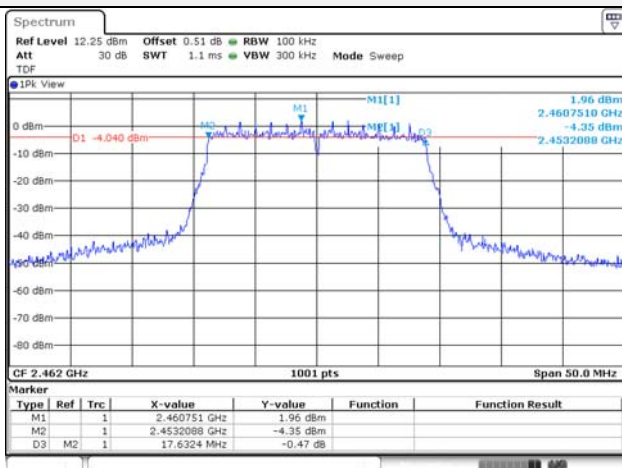


802.11n_HT40 / 2 452 MHz

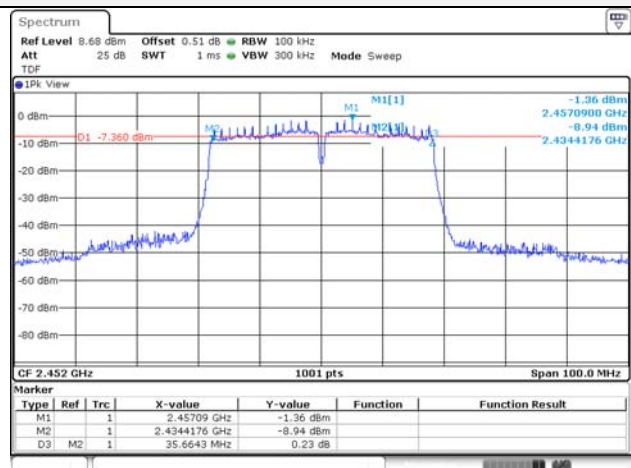


SISO(ANT2)


802.11b / 2 412 MHz

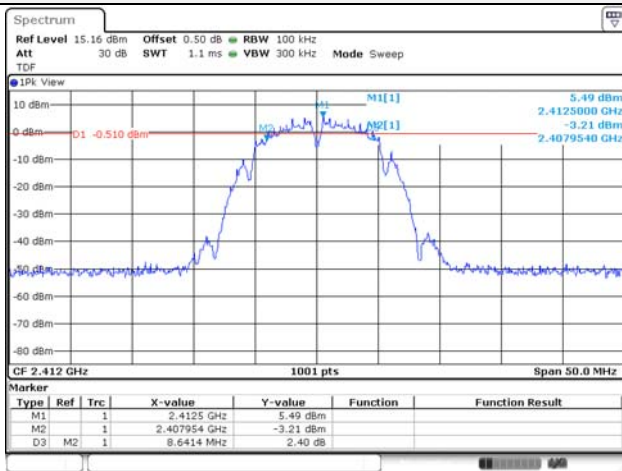


802.11g / 2 412 MHz

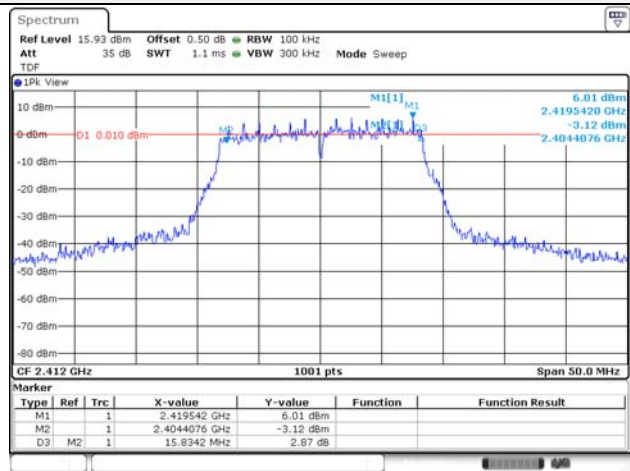


802.11b / 2 437 MHz

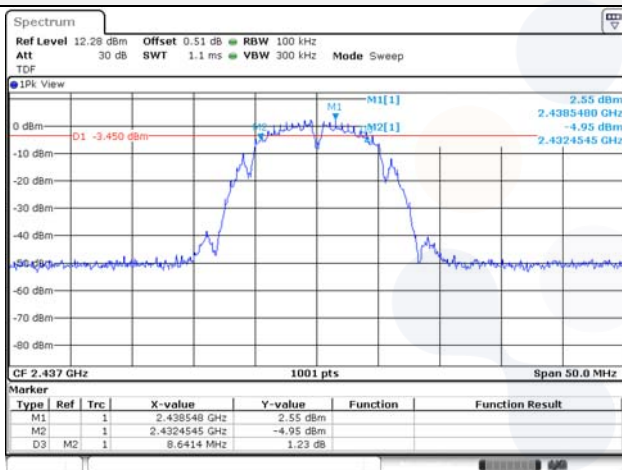


802.11g / 2 437 MHz

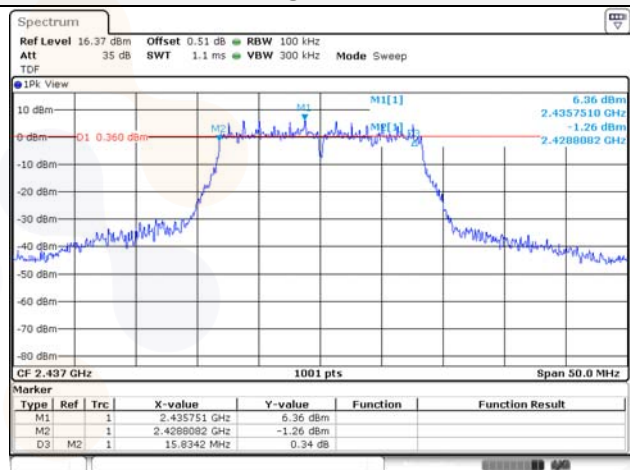


802.11b / 2 462 MHz

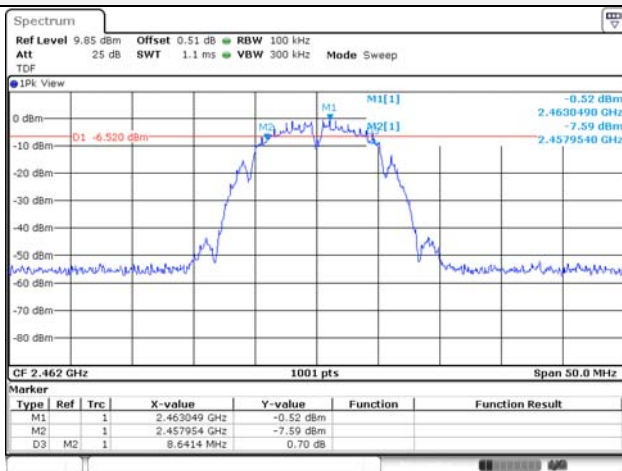


802.11g / 2 462 MHz

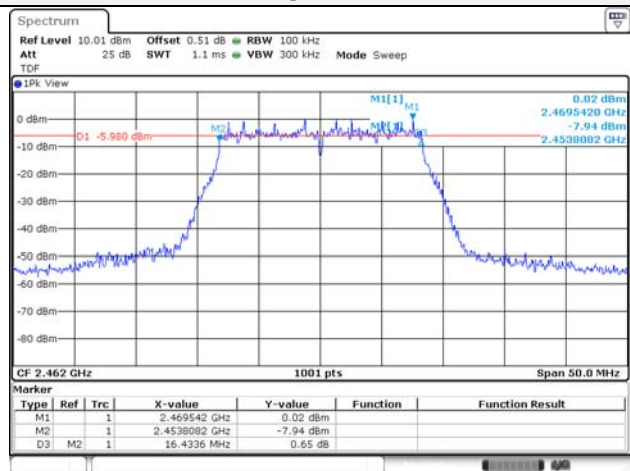


802.11n_HT20 / 2 412 MHz

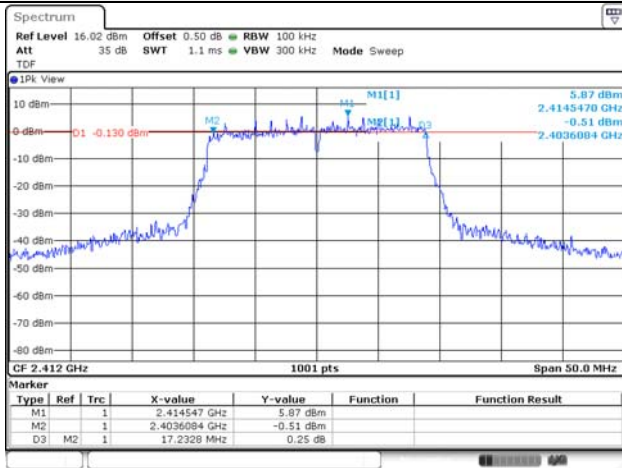


802.11n_HT40 / 2 422 MHz

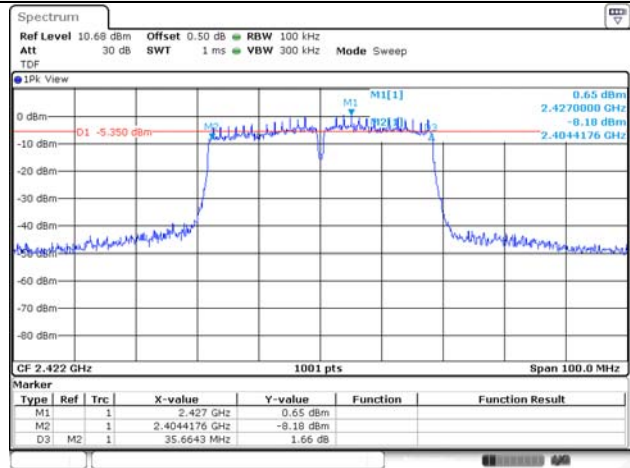


802.11n_HT20 / 2 437 MHz

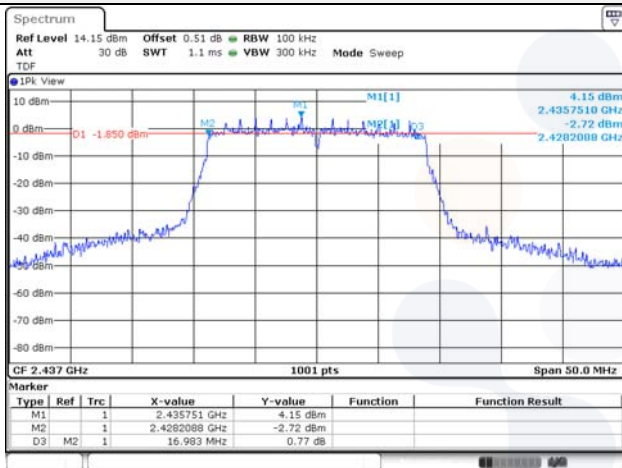


802.11n_HT40 / 2 437 MHz

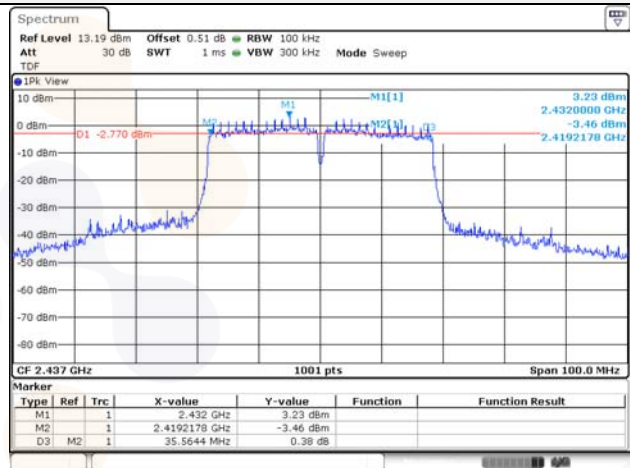

802.11n_HT20 / 2 462 MHz

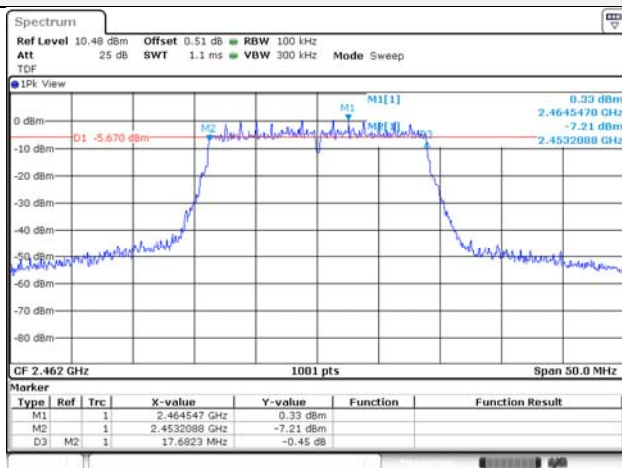

802.11n_HT40 / 2 452 MHz

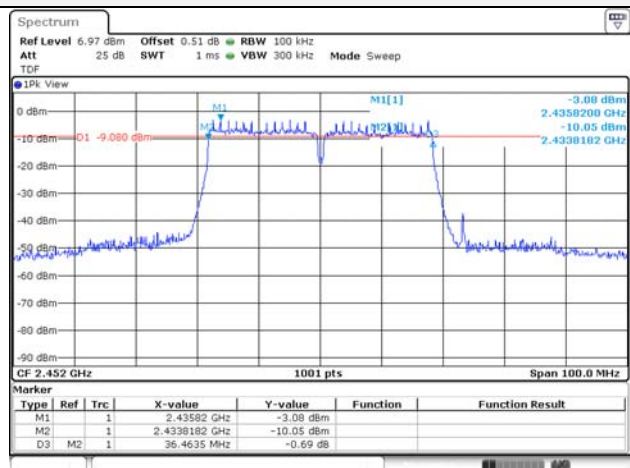


MIMO


Test mode	Frequency(MHz)	6 dB bandwidth(MHz)		
		ANT 0	ANT 1	ANT 2
802.11b	2 412	8.69	8.64	8.14
	2 437	9.09	8.14	8.14
	2 462	8.64	9.14	9.14
802.11g	2 412	16.38	16.43	15.83
	2 437	15.83	15.83	16.43
	2 462	16.43	16.43	16.43
802.11n HT20	2 412	17.63	17.63	16.38
	2 437	16.98	16.43	17.33
	2 462	17.63	17.68	17.68
802.11n HT40	2 422	36.06	36.06	35.46
	2 437	35.86	35.86	35.46
	2 452	36.06	35.46	36.46

MIMO(ANT0)


802.11b / 2 412 MHz

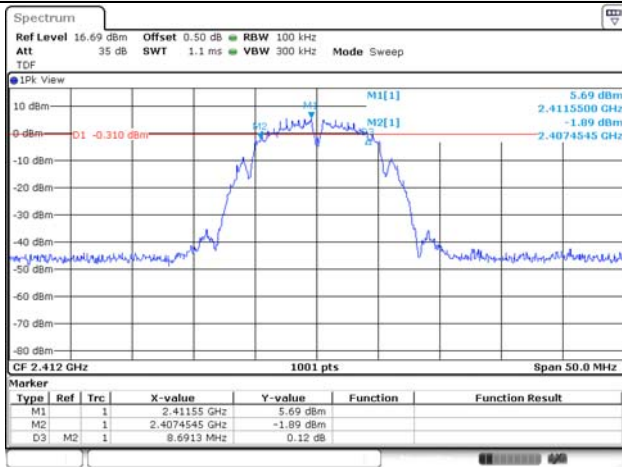


802.11g / 2 412 MHz

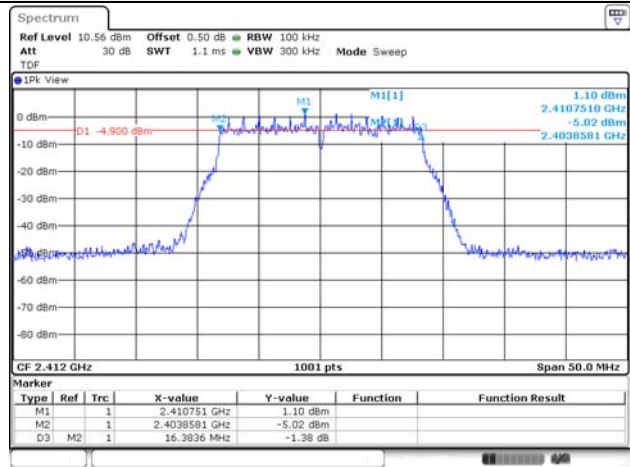


802.11b / 2 437 MHz

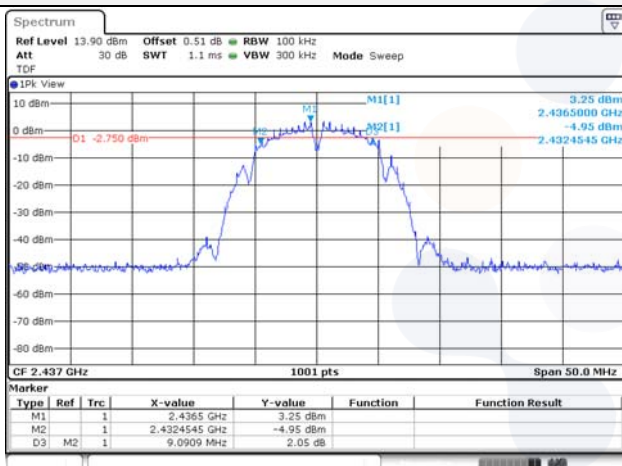

802.11g / 2 437 MHz

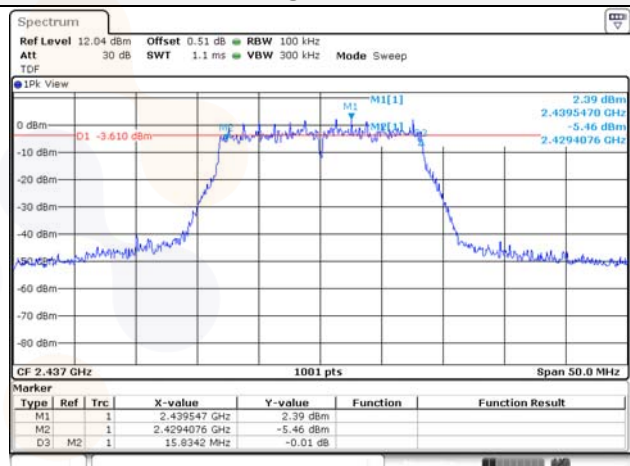

802.11b / 2 462 MHz

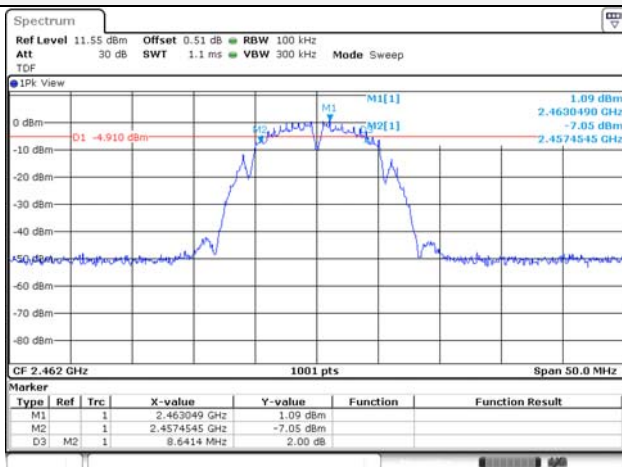

802.11g / 2 462 MHz

