






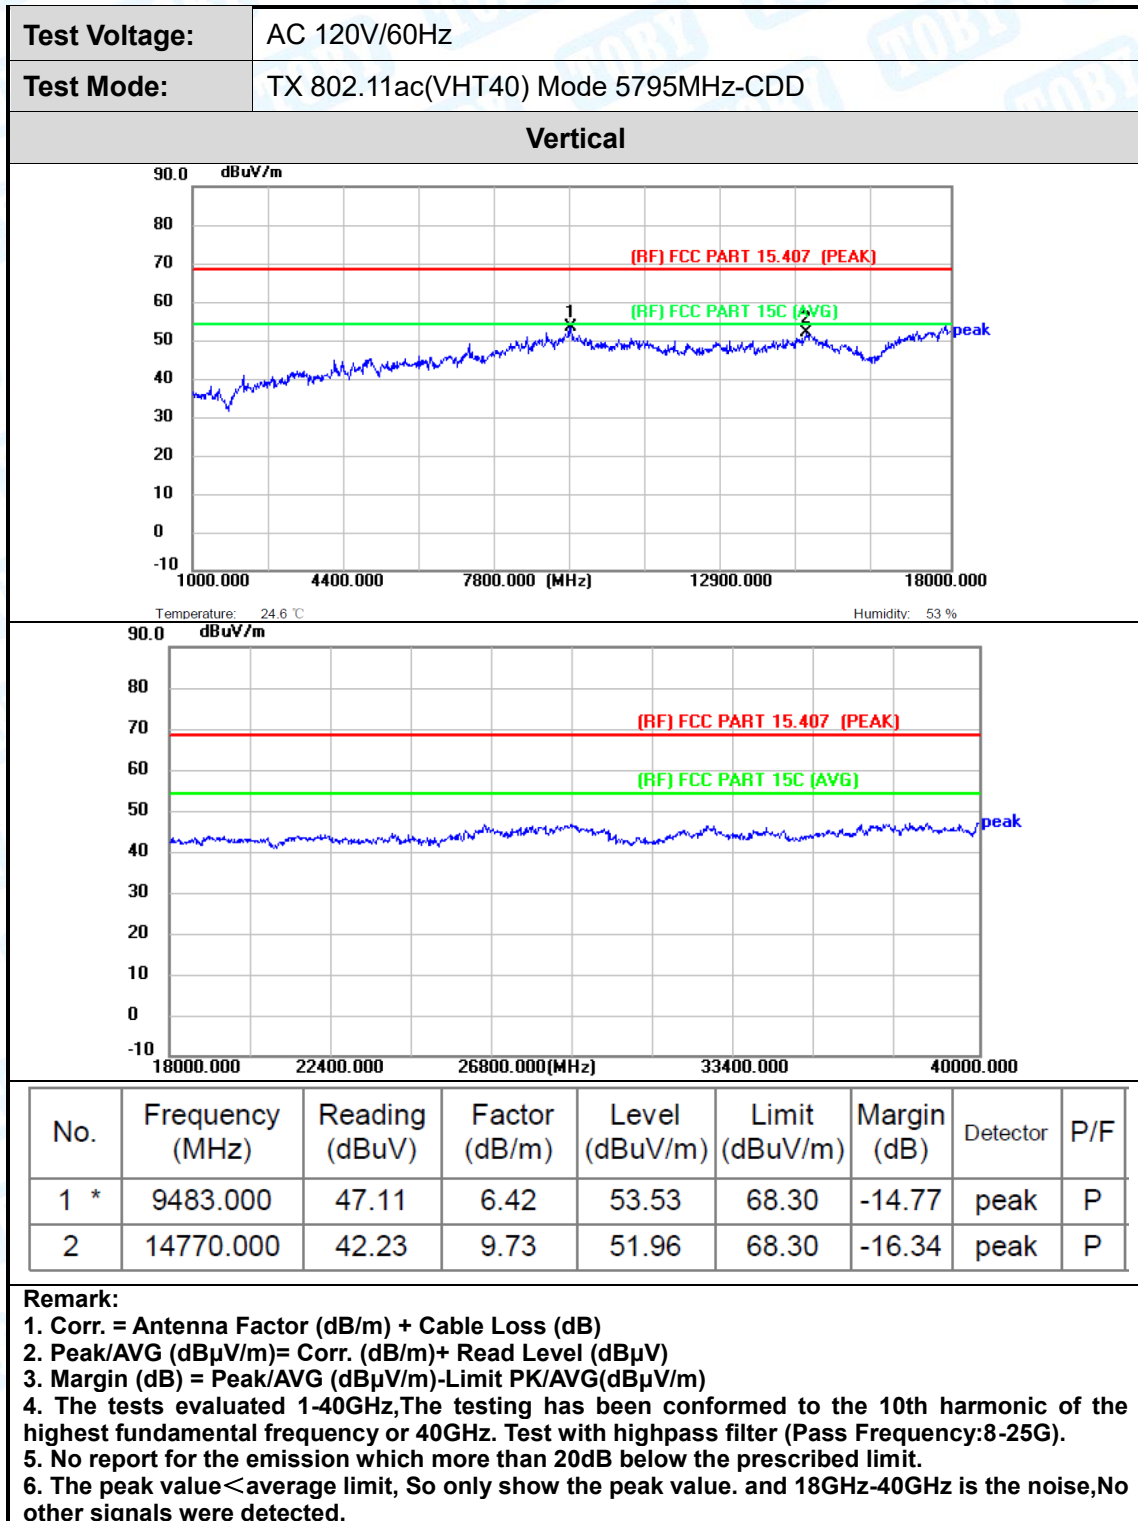


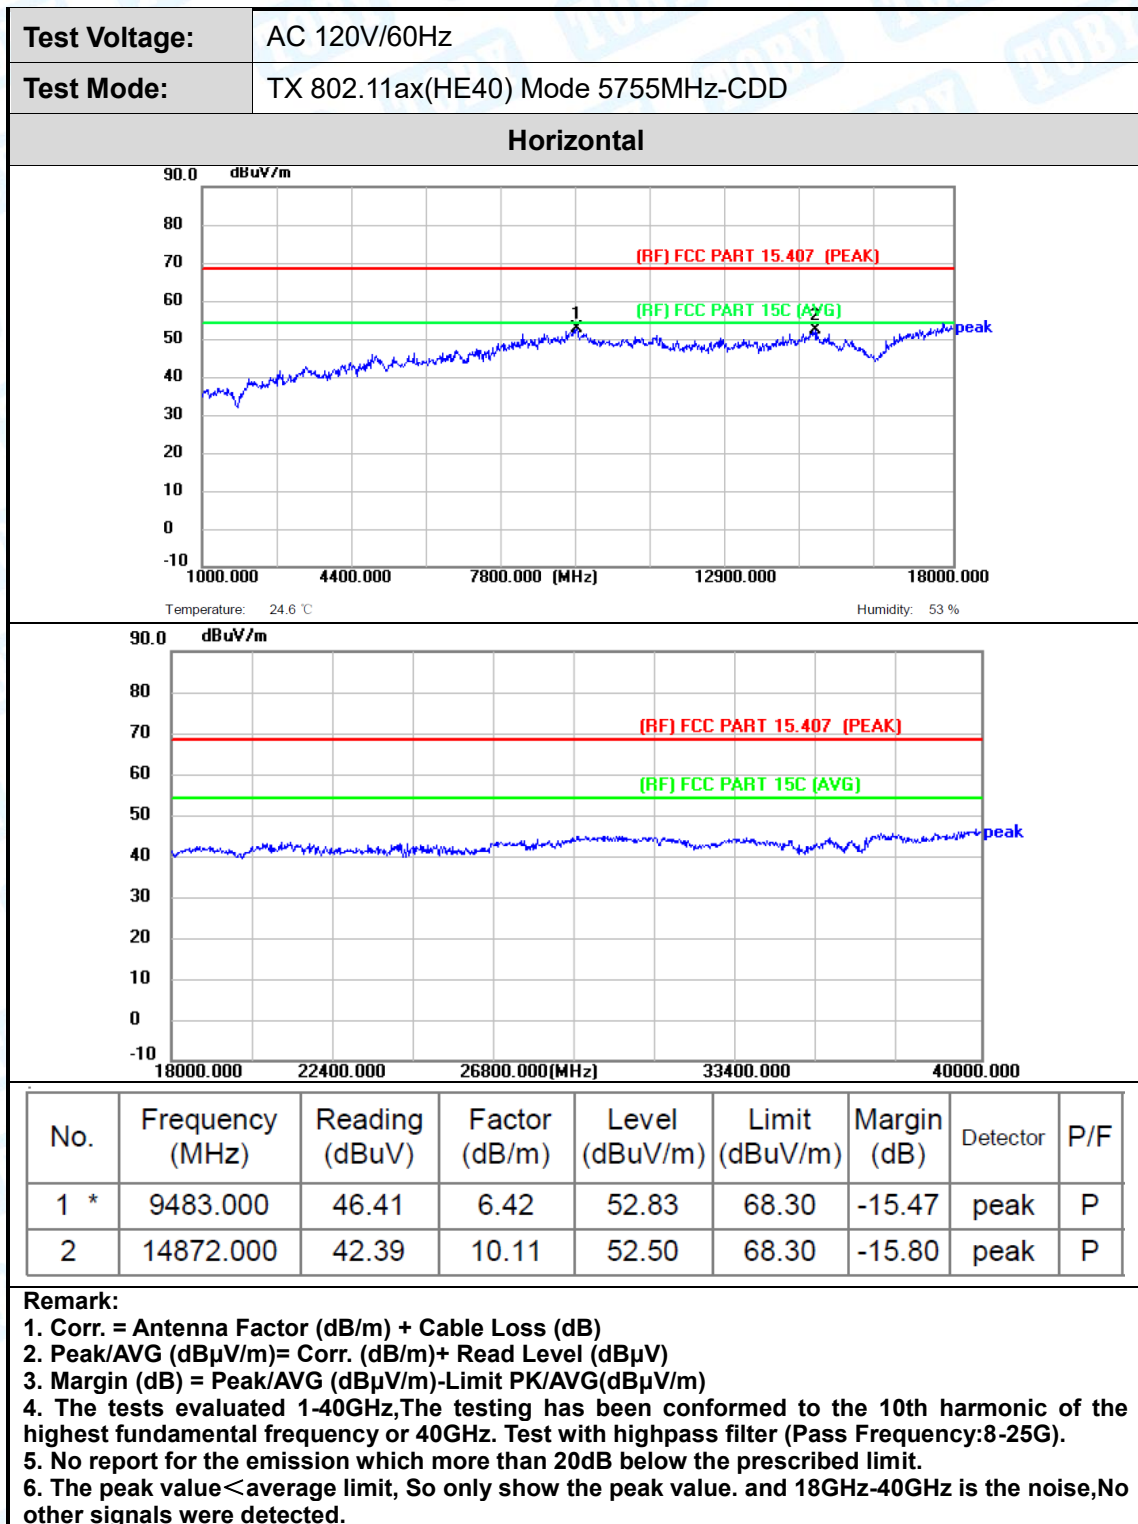


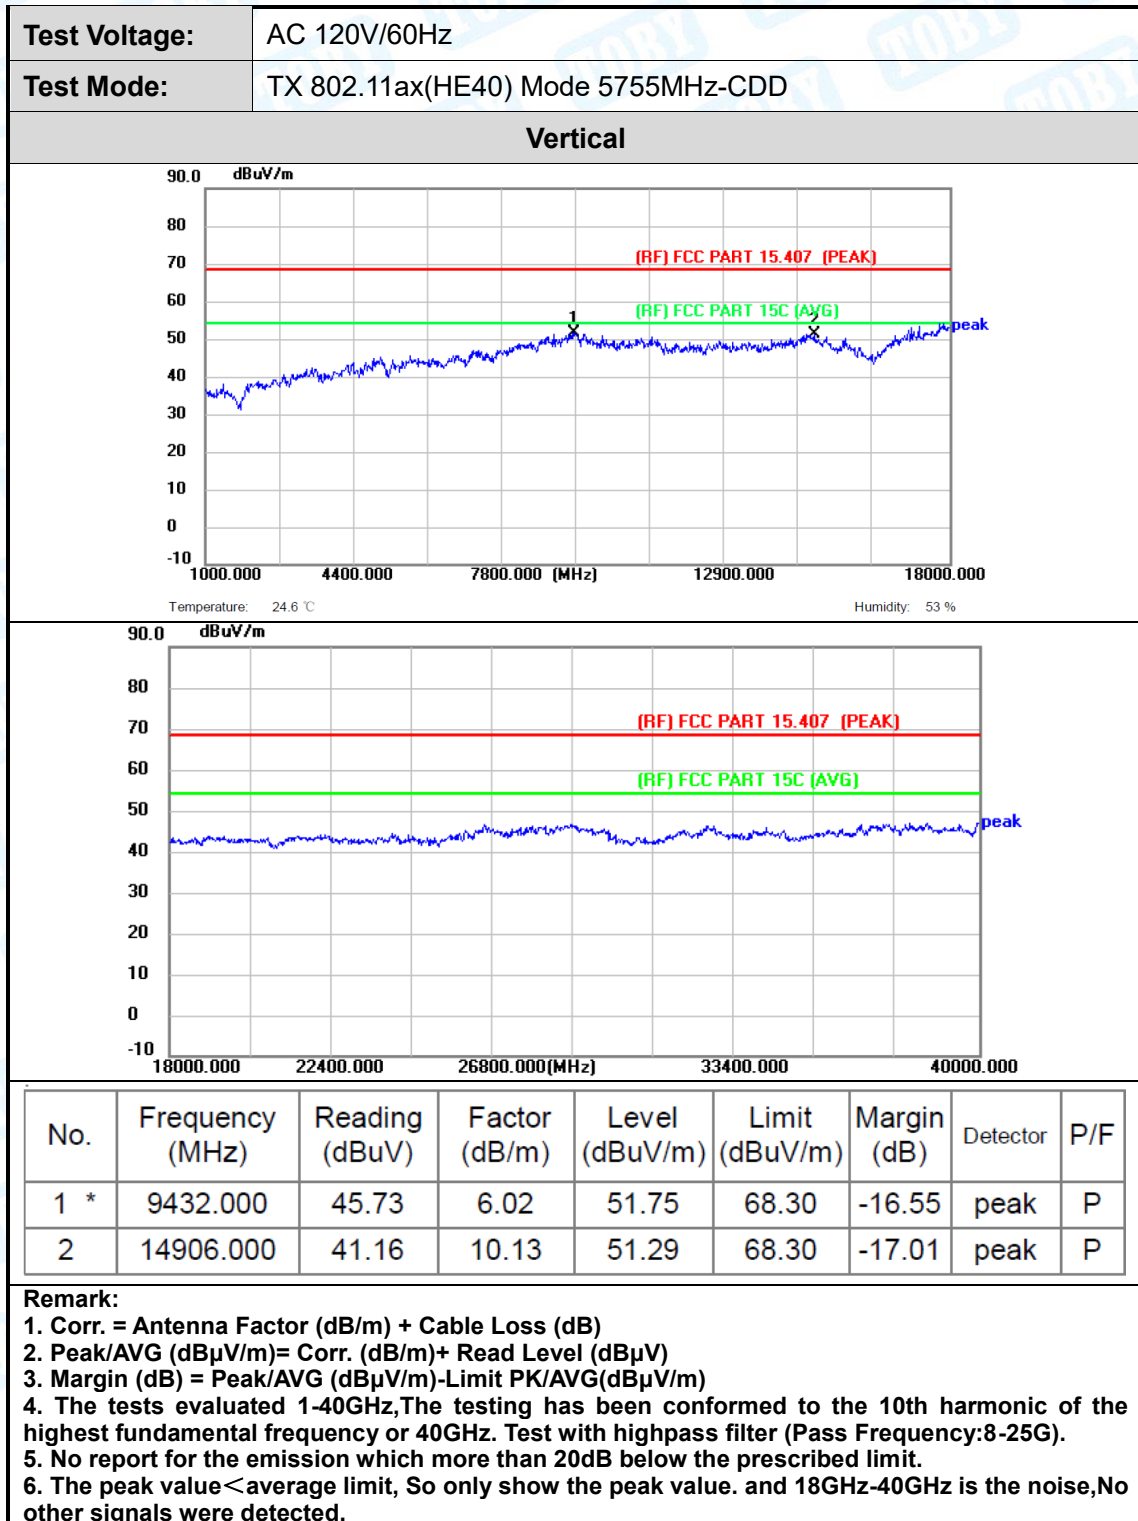


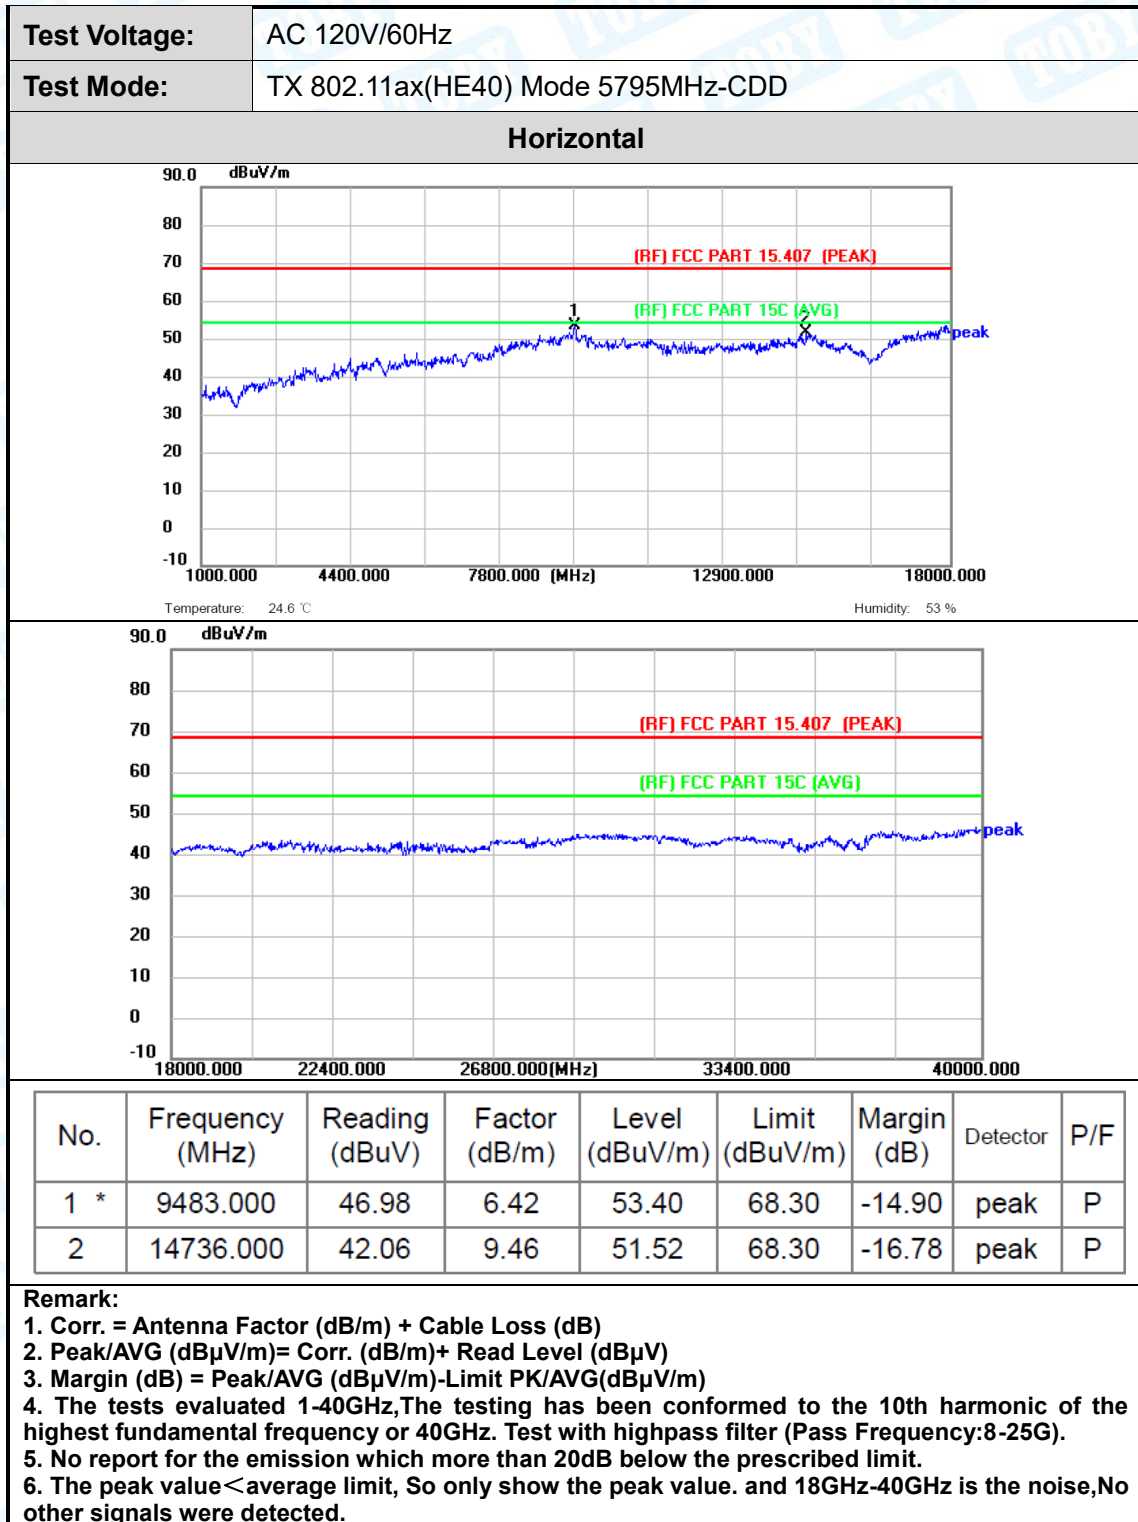


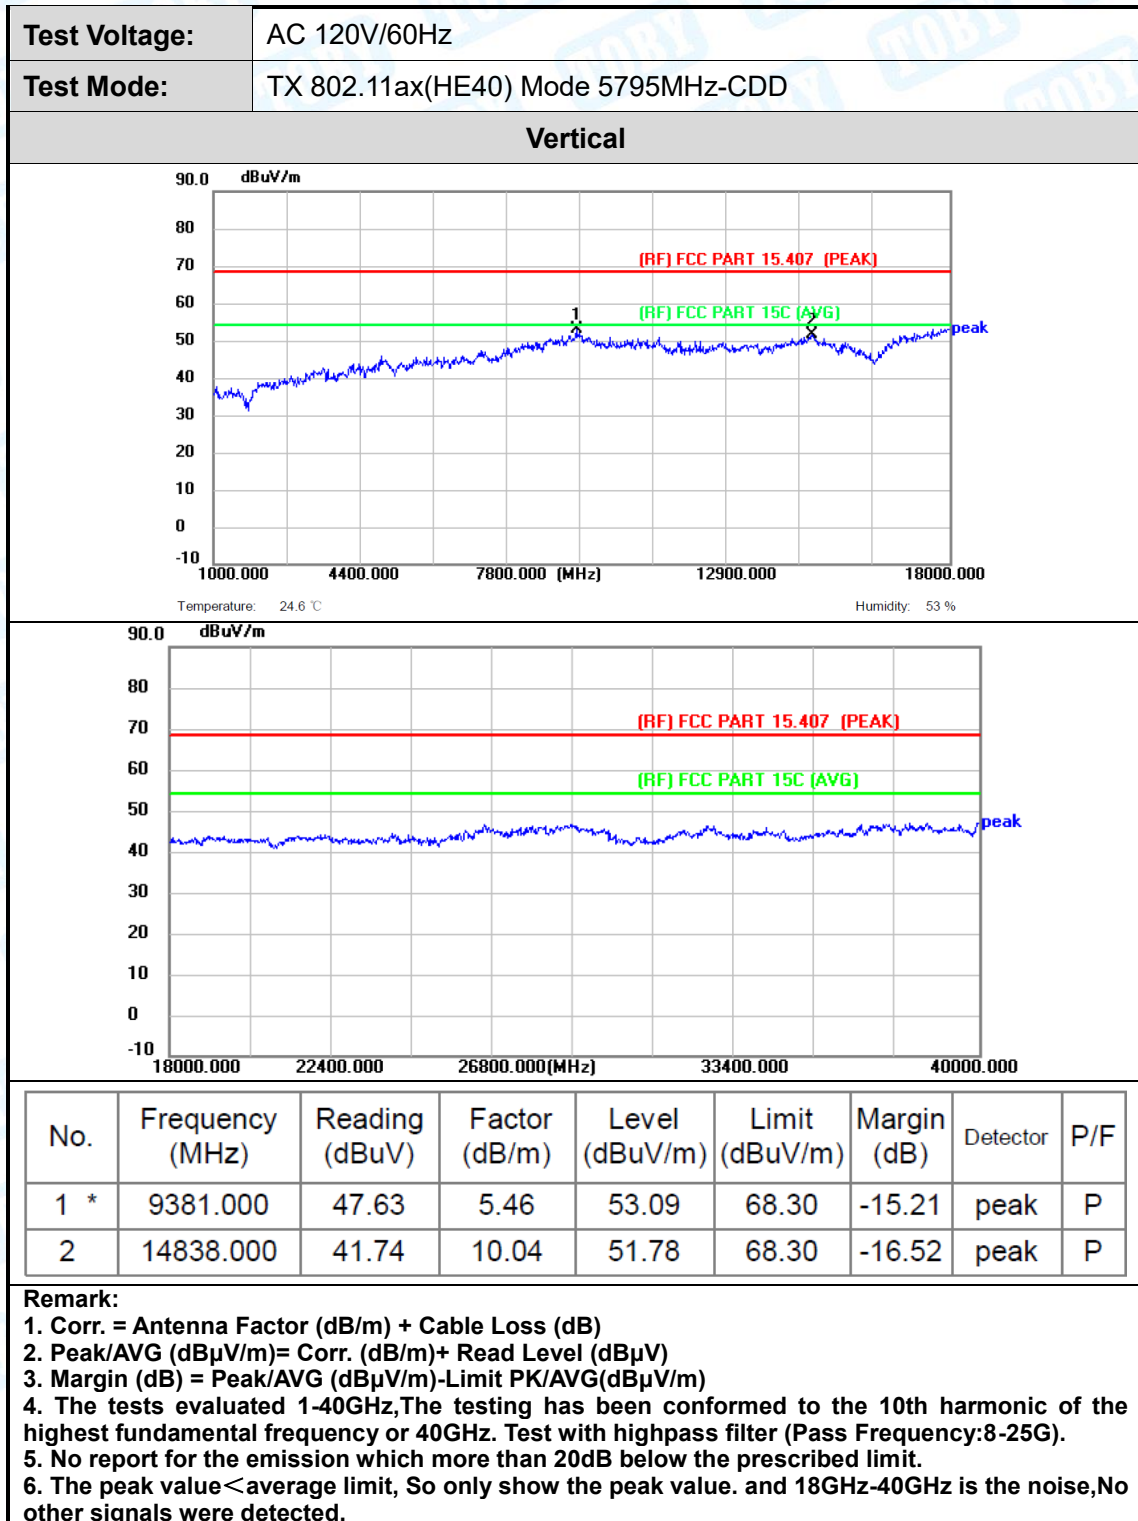

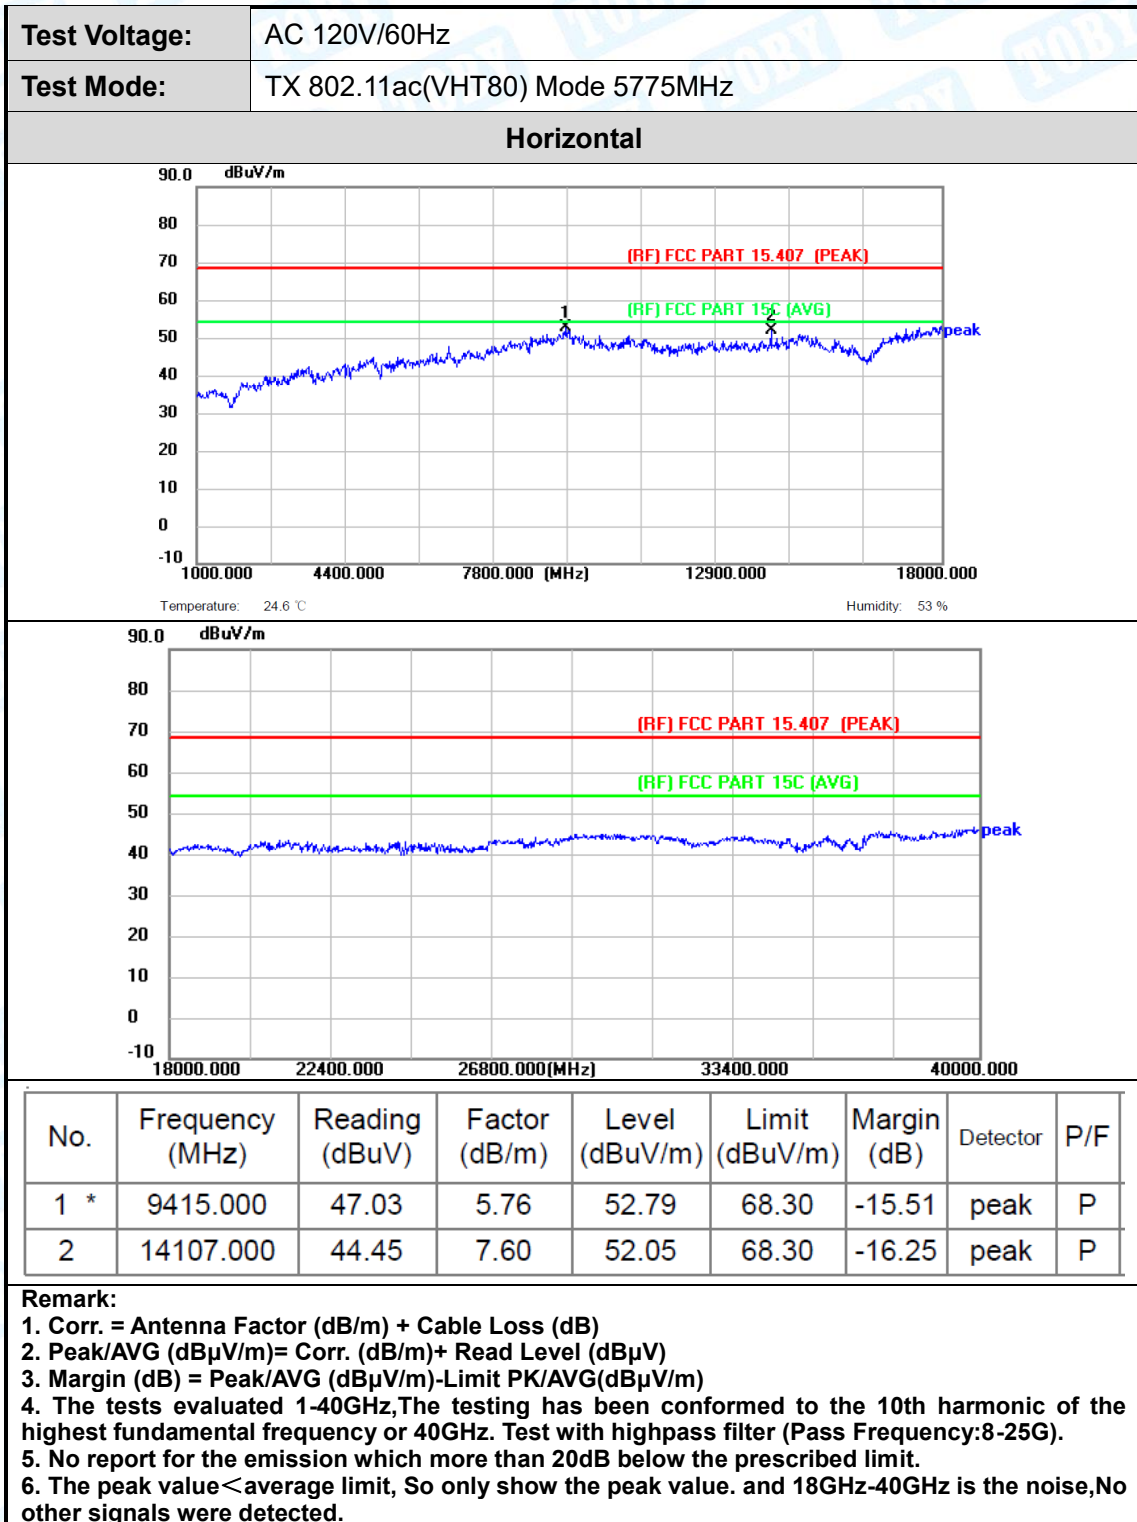

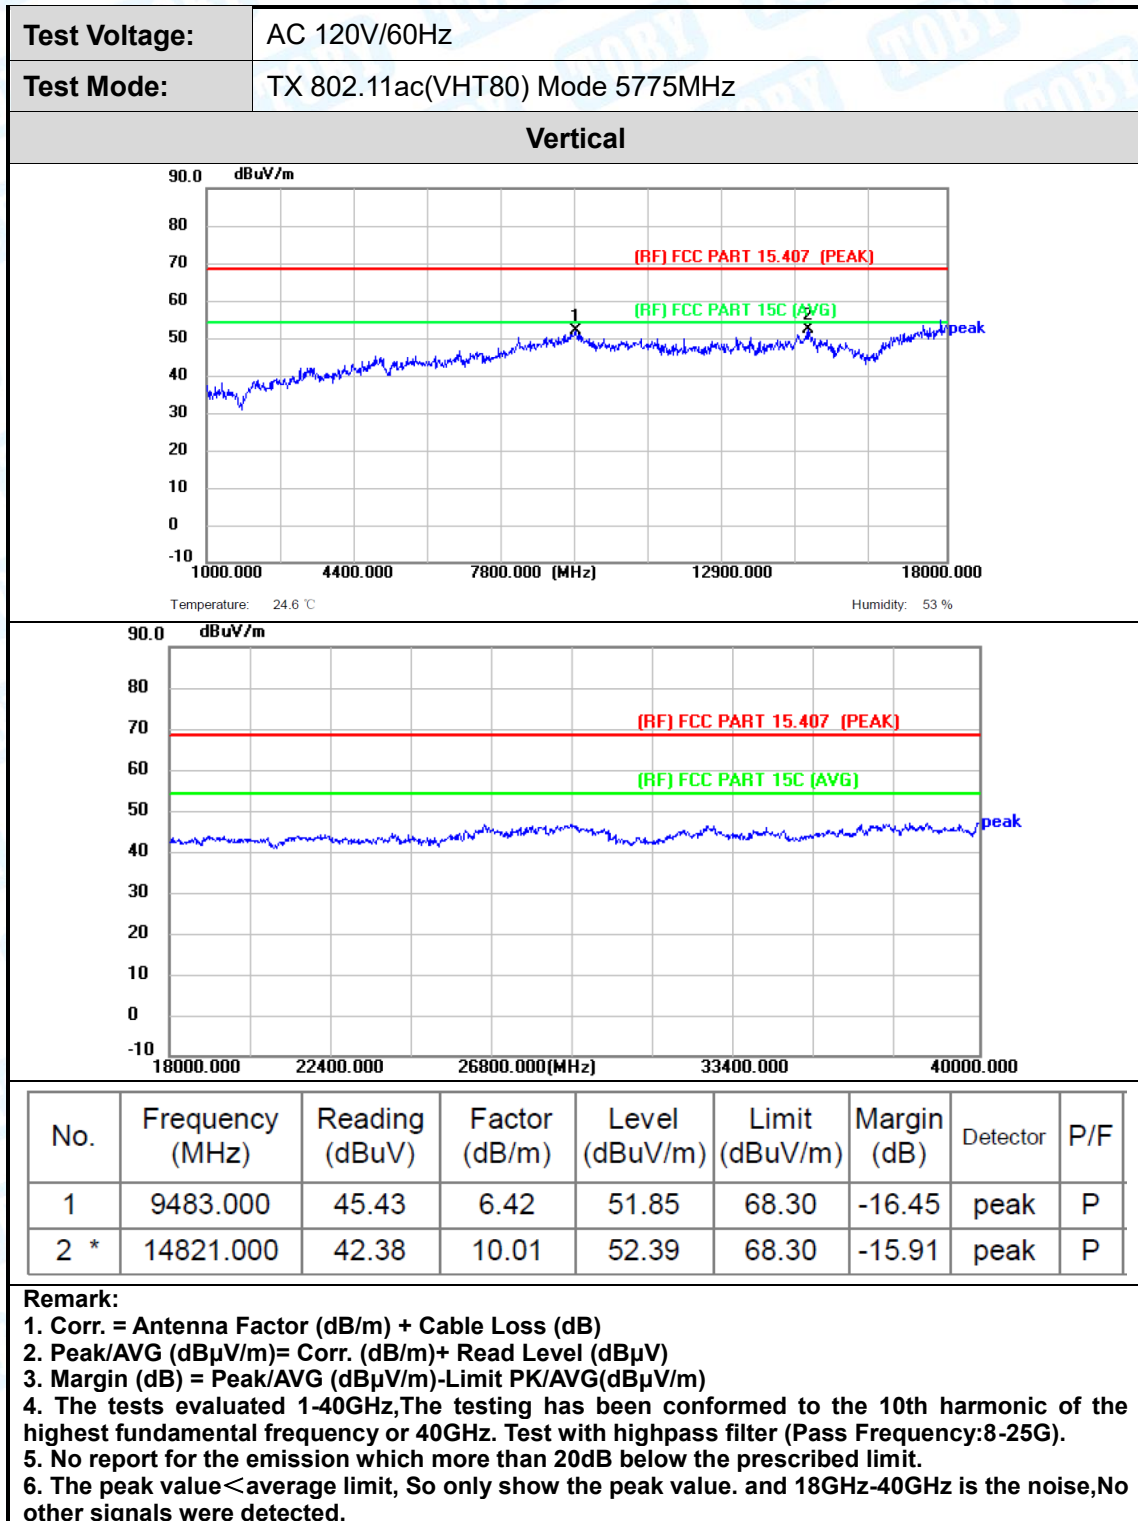

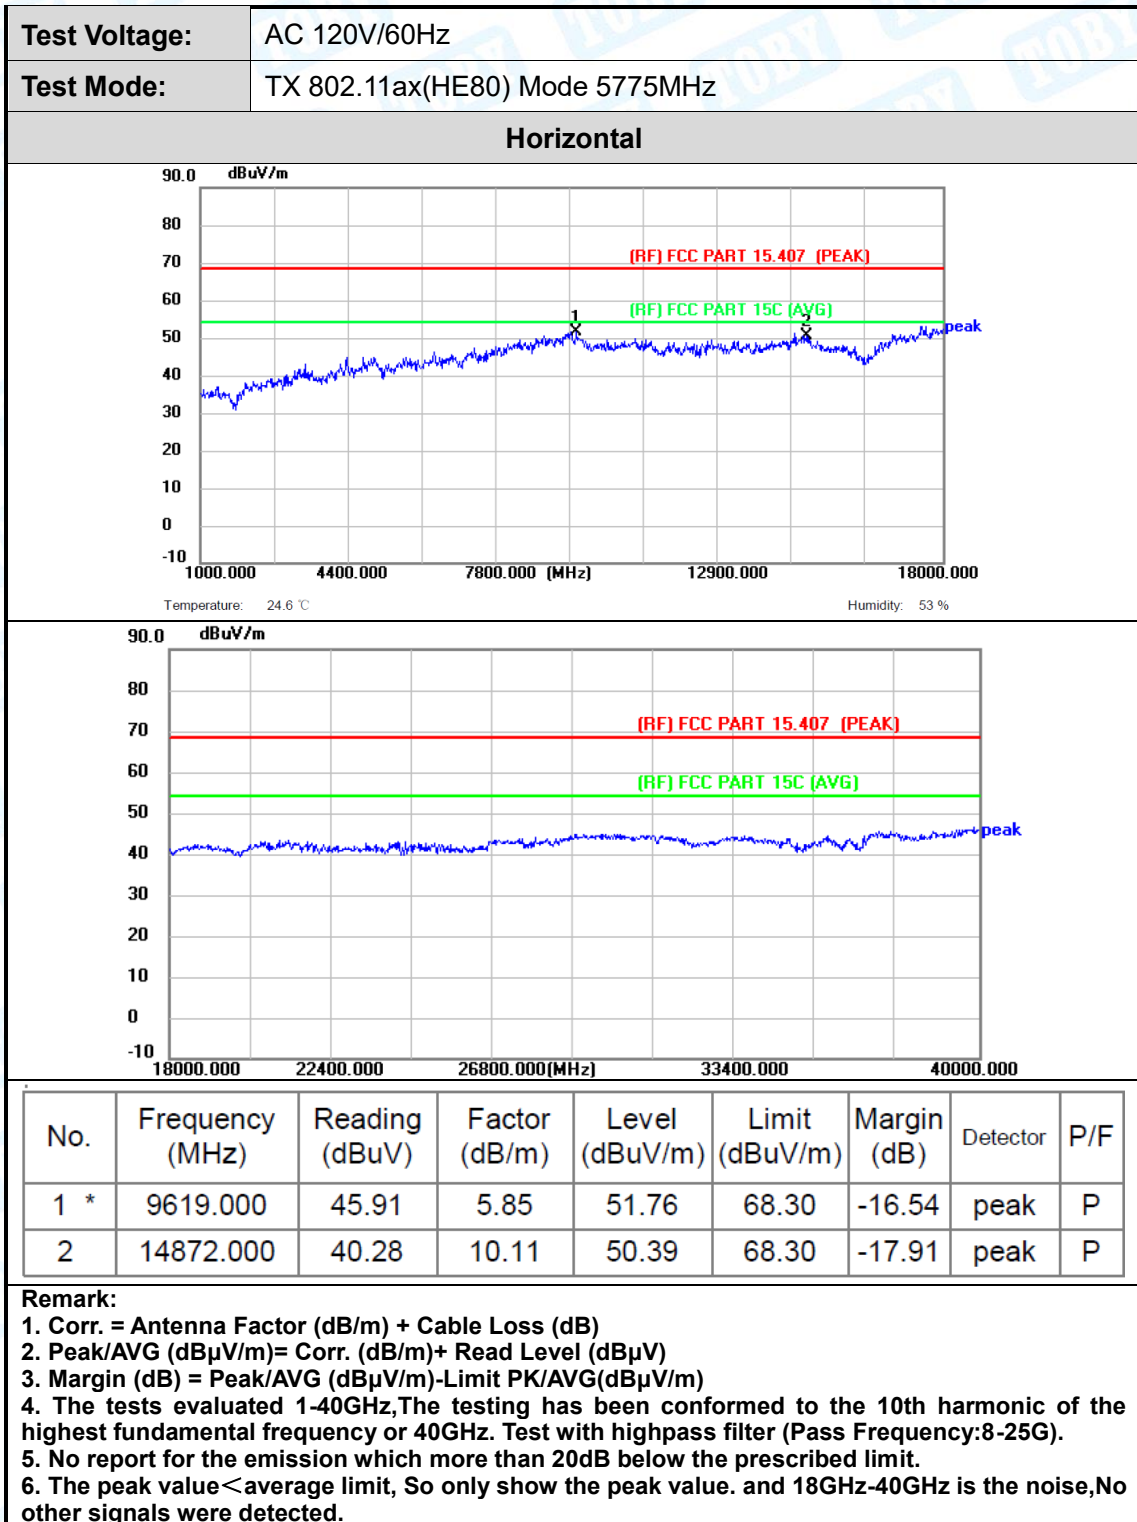


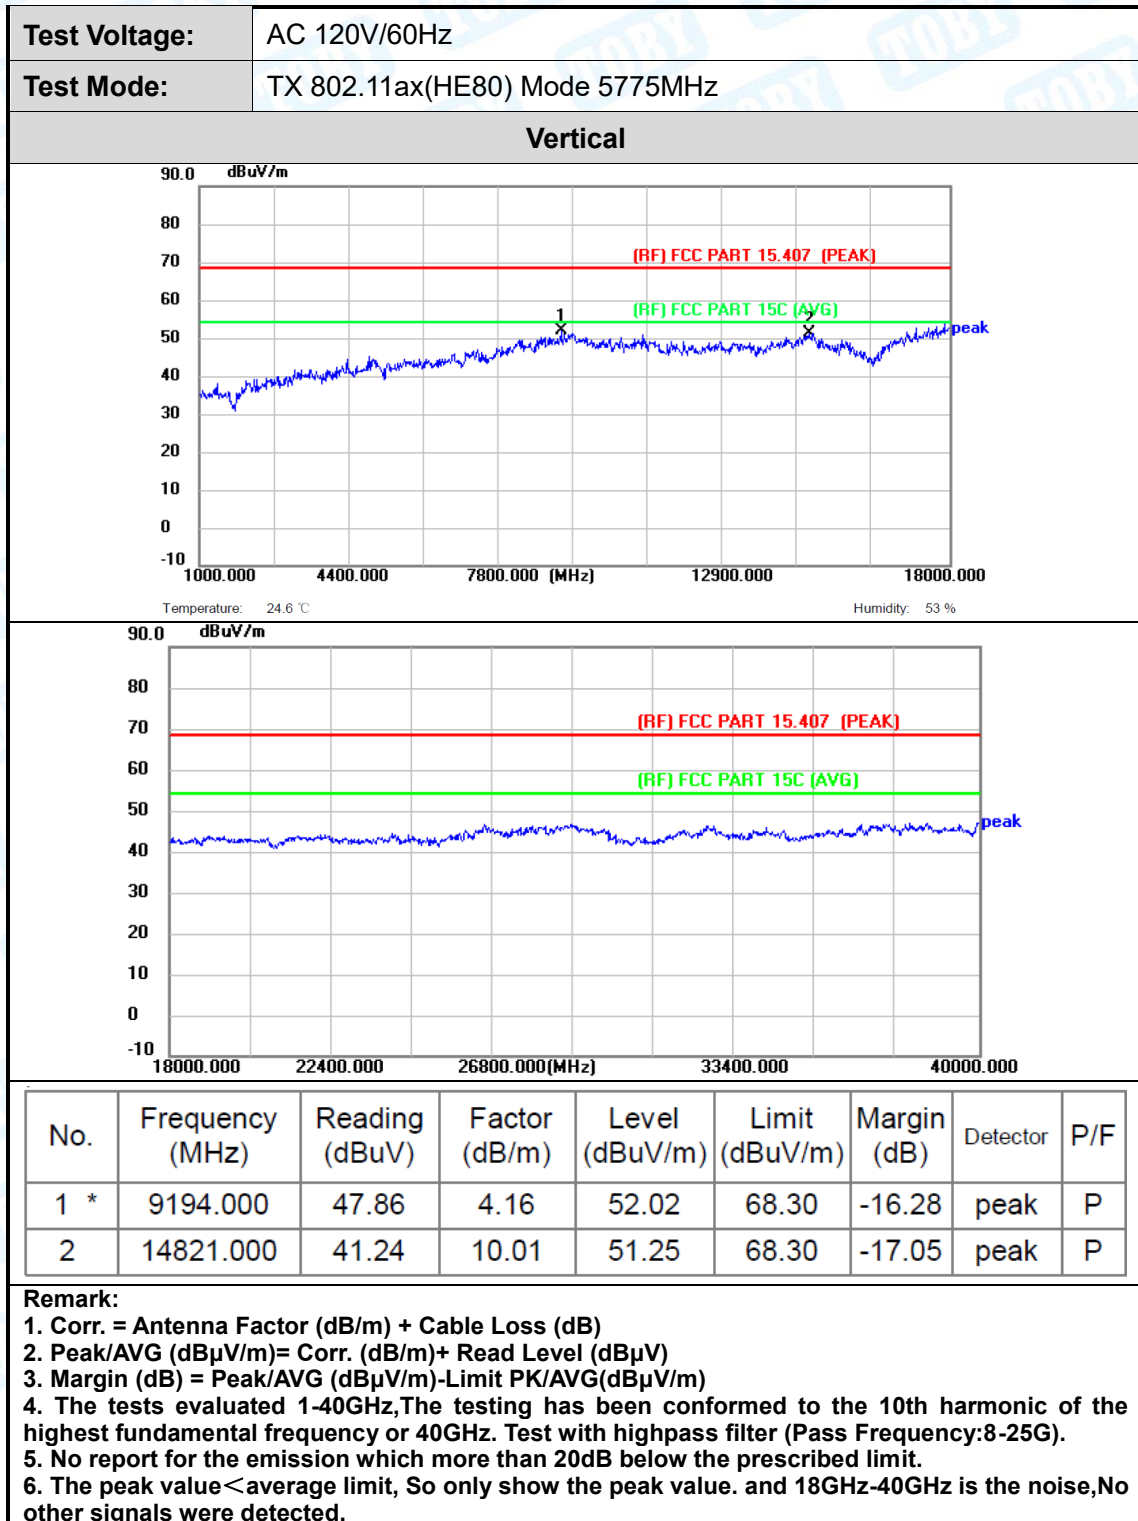

Attachment C-- Restricted Bands Requirement Test Data

Radiation Test (only show the worst case data)

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)-CDD		
Remark:			

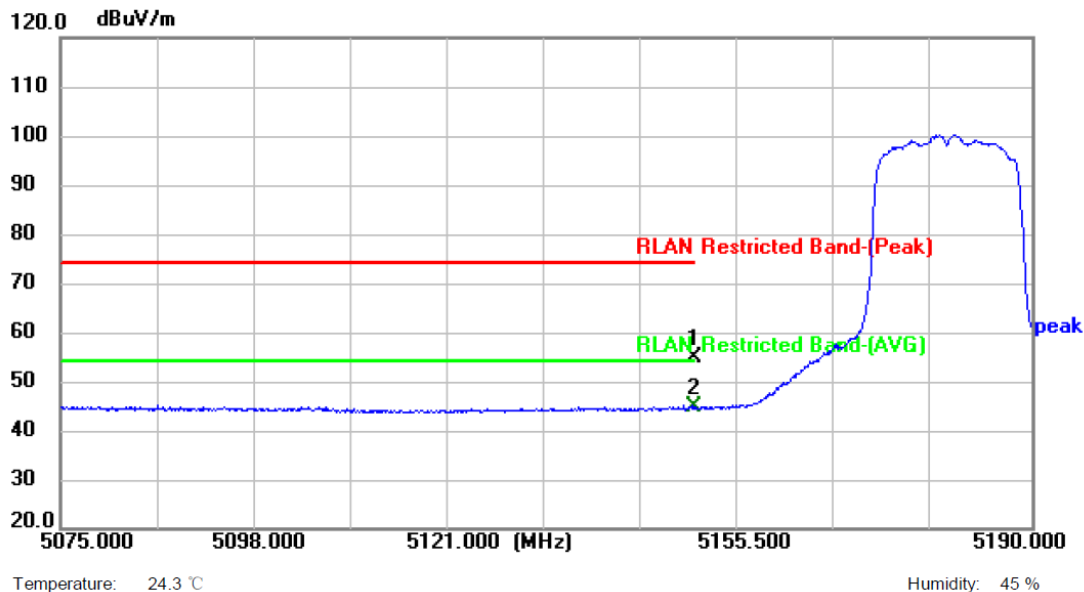

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	35.10	19.66	54.76	74.00	-19.24	peak	P
2 *	5150.000	25.17	19.66	44.83	54.00	-9.17	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1) –CDD		
Remark:			

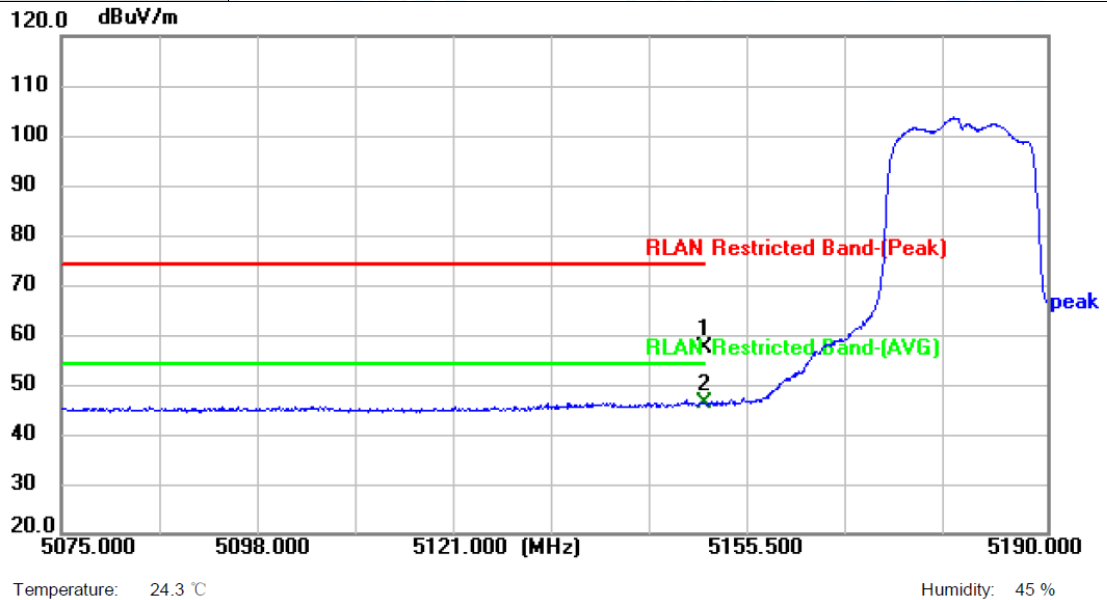


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	37.73	19.66	57.39	74.00	-16.61	peak	P
2 *	5150.000	26.62	19.66	46.28	54.00	-7.72	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A) –CDD		
Remark:			

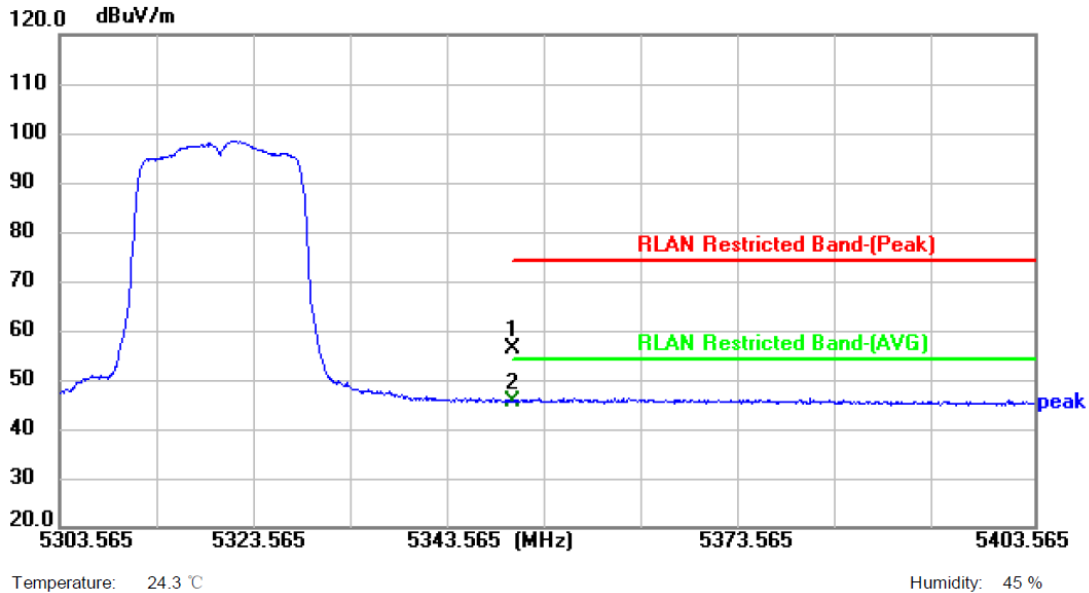


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	36.09	20.07	56.16	74.00	-17.84	peak	P
2 *	5350.000	25.51	20.07	45.58	54.00	-8.42	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A) –CDD		
Remark:			

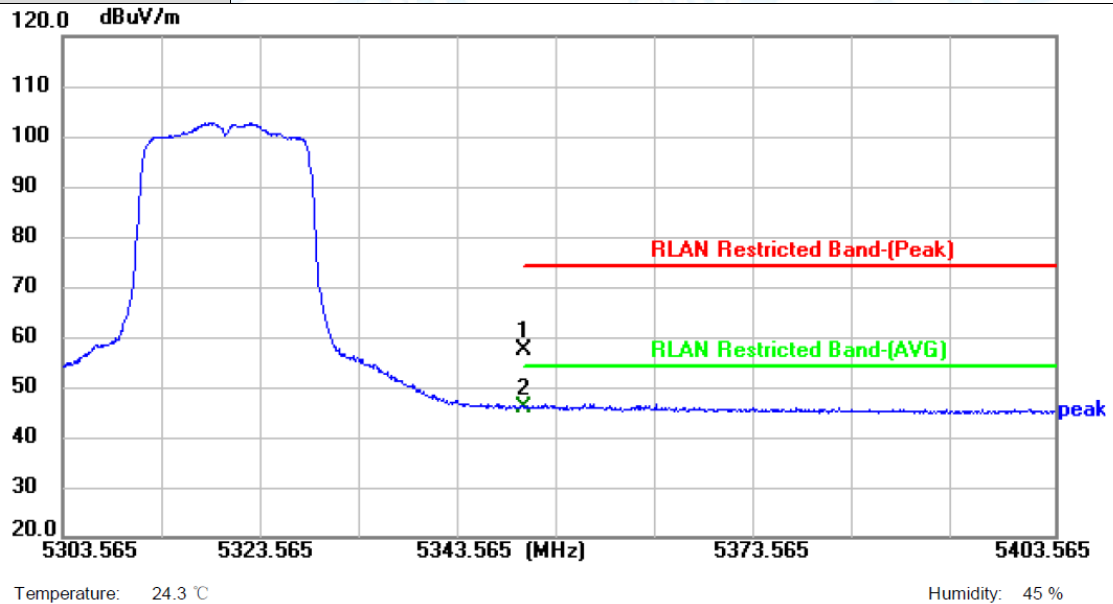


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	37.40	20.07	57.47	74.00	-16.53	peak	P
2 *	5350.000	25.67	20.07	45.74	54.00	-8.26	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)-CDD		
Remark:			

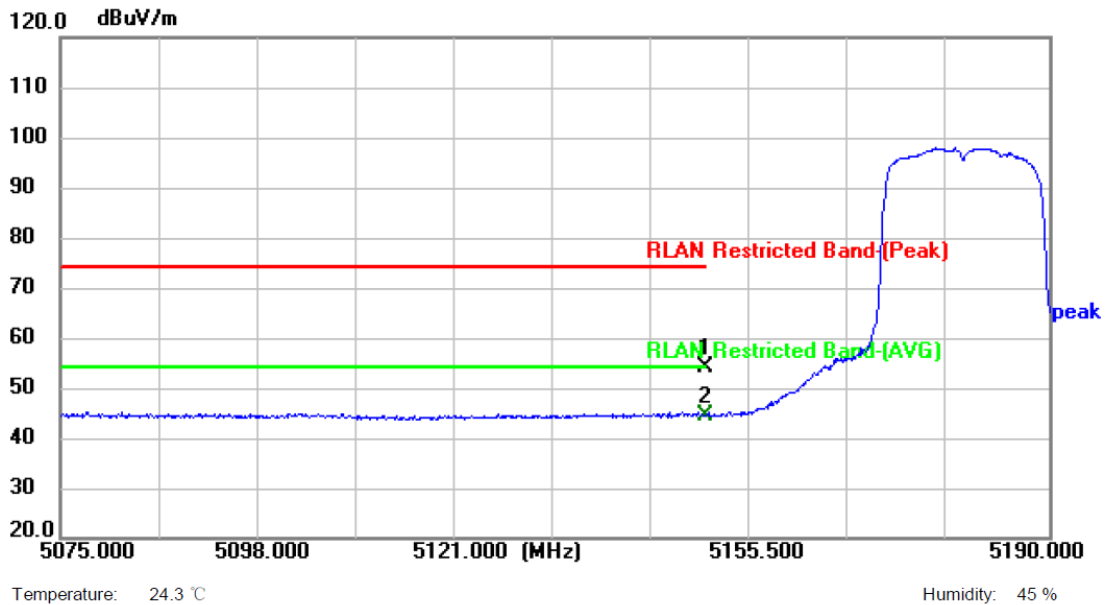


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	34.48	19.66	54.14	74.00	-19.86	peak	P
2 *	5150.000	24.93	19.66	44.59	54.00	-9.41	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -CDD		
Remark:			

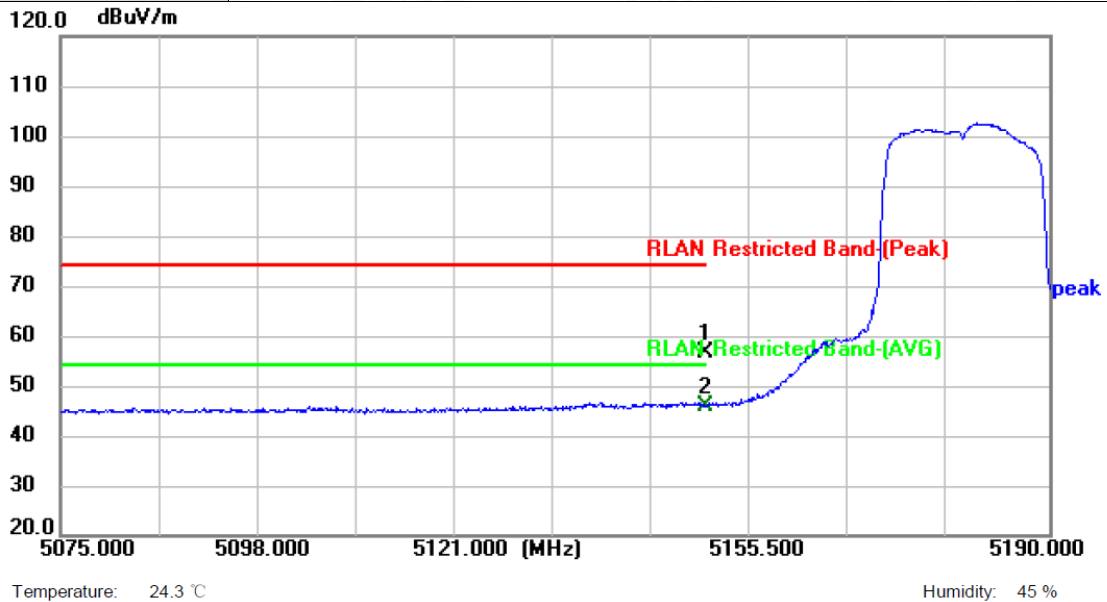


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	36.89	19.66	56.55	74.00	-17.45	peak	P
2 *	5150.000	26.38	19.66	46.04	54.00	-7.96	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -CDD		
Remark:			

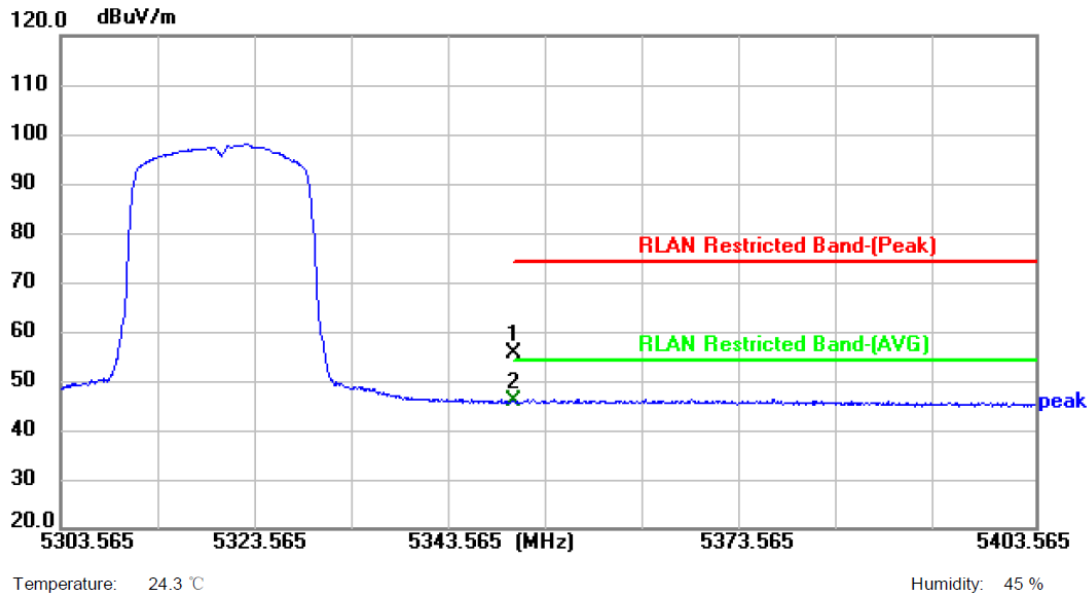


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	35.33	20.07	55.40	74.00	-18.60	peak	P
2 *	5350.000	25.74	20.07	45.81	54.00	-8.19	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) -CDD		
Remark:			

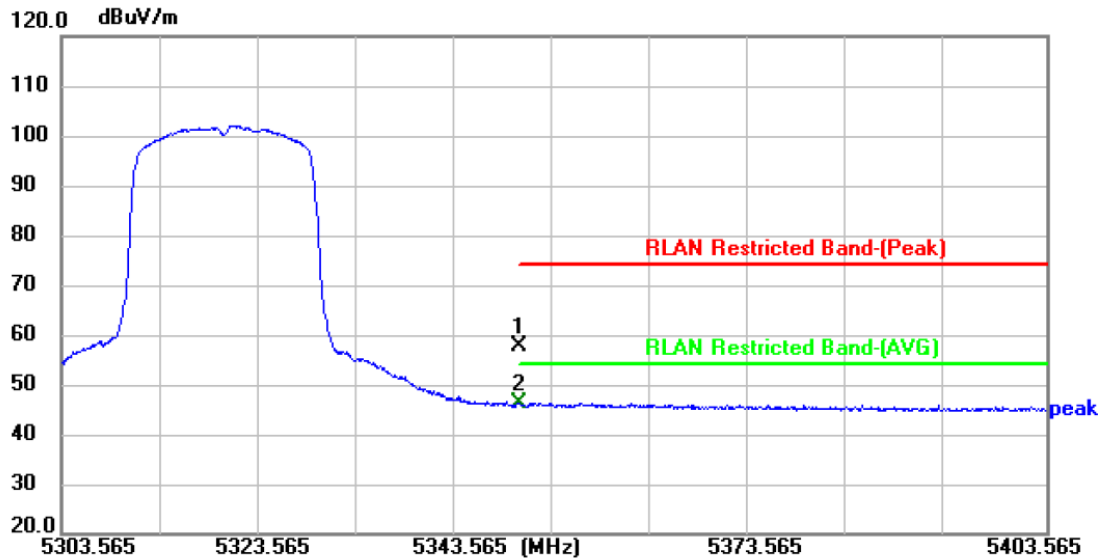

Temperature: 24.3 °C

Humidity: 45 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	37.61	20.07	57.68	74.00	-16.32	peak	P
2 *	5350.000	26.34	20.07	46.41	54.00	-7.59	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD		
Remark:			

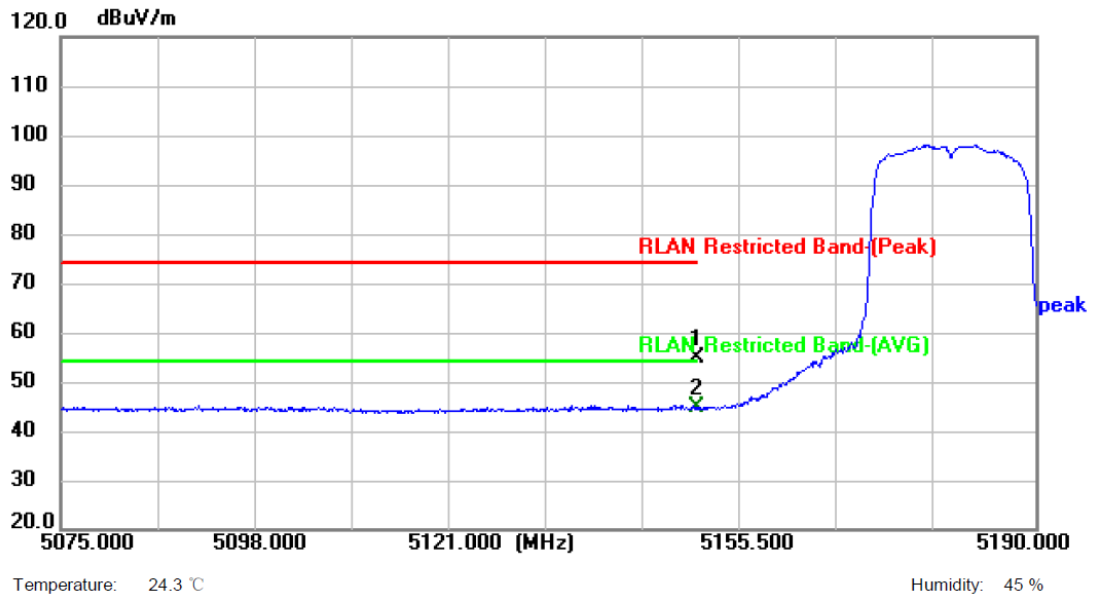


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	35.34	19.66	55.00	74.00	-19.00	peak	P
2 *	5150.000	25.11	19.66	44.77	54.00	-9.23	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD		
Remark:			

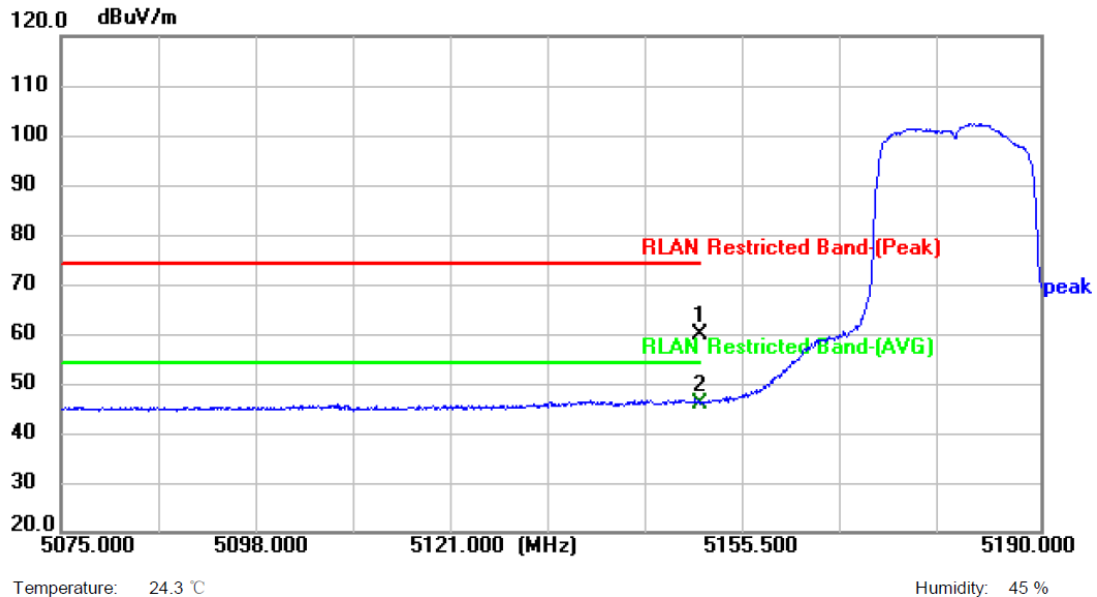


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	40.12	19.66	59.78	74.00	-14.22	peak	P
2 *	5150.000	26.32	19.66	45.98	54.00	-8.02	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD		
Remark:			

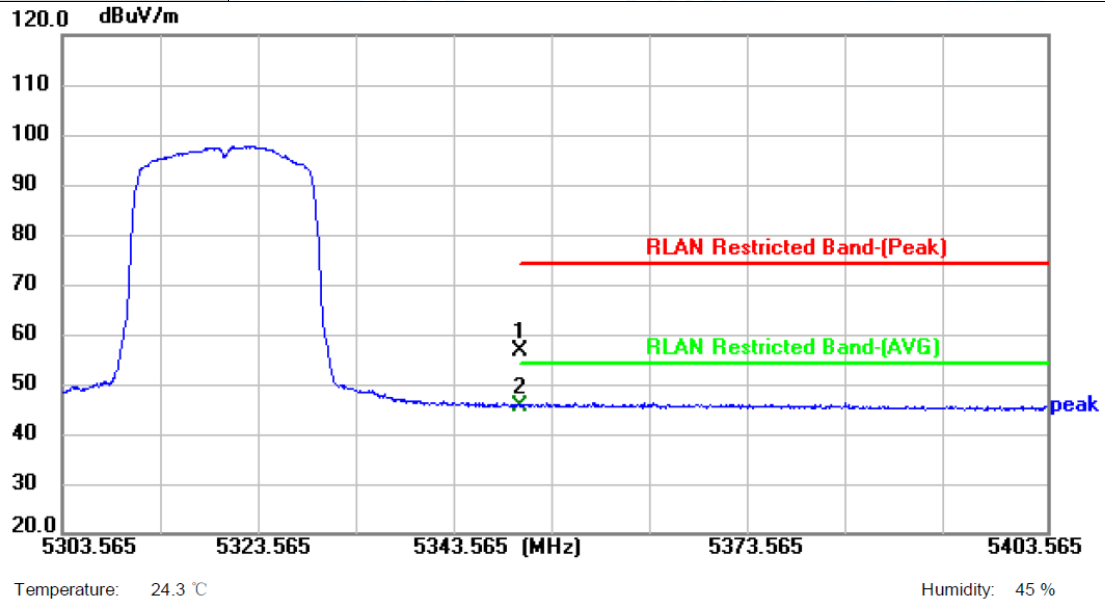


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	36.42	20.07	56.49	74.00	-17.51	peak	P
2 *	5350.000	25.61	20.07	45.68	54.00	-8.32	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD		
Remark:			

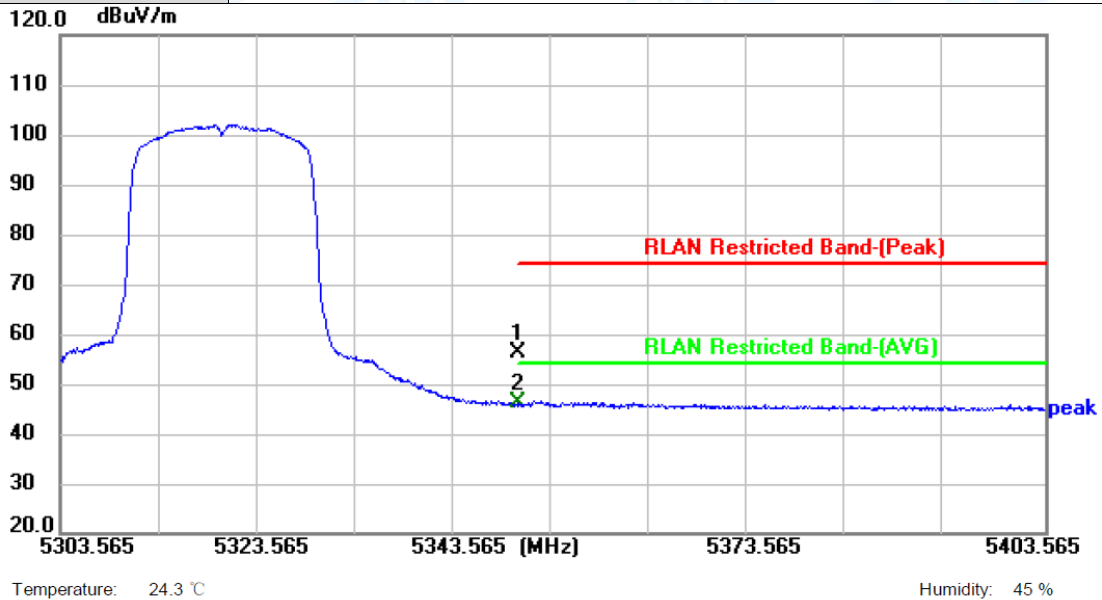


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	36.29	20.07	56.36	74.00	-17.64	peak	P
2 *	5350.000	26.13	20.07	46.20	54.00	-7.80	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD		
Remark:			

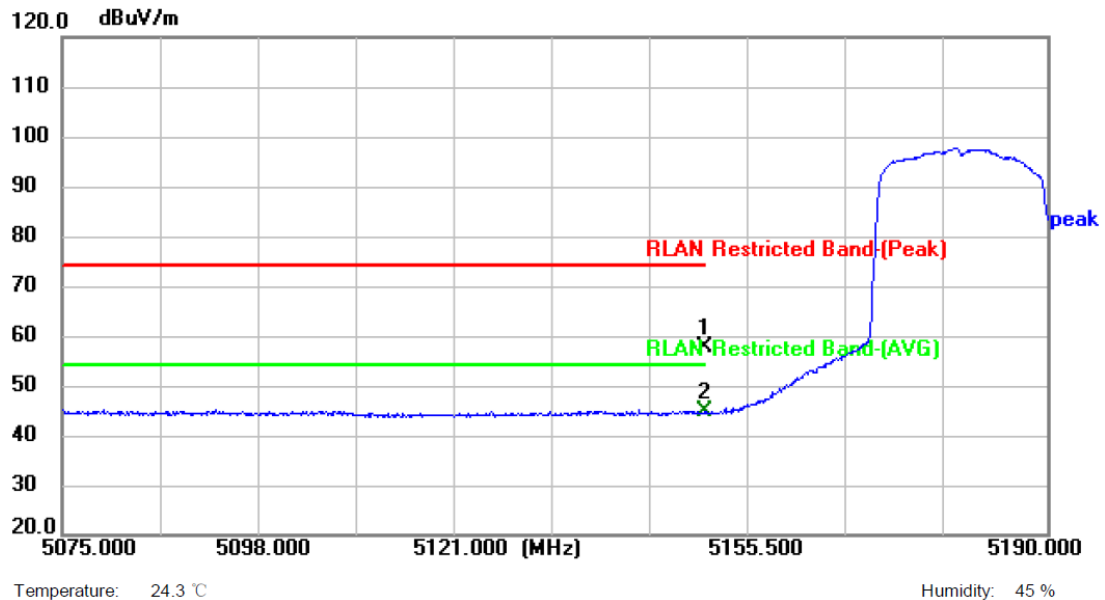


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	37.90	19.66	57.56	74.00	-16.44	peak	P
2 *	5150.000	25.07	19.66	44.73	54.00	-9.27	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) -CDD		
Remark:			

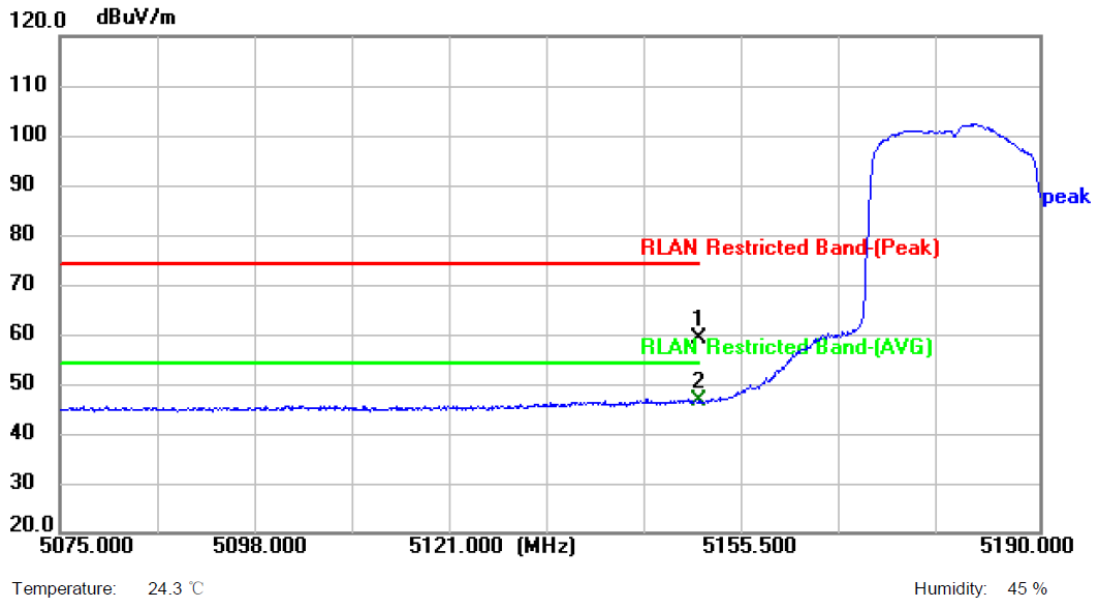

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	39.30	19.66	58.96	74.00	-15.04	peak	P
2 *	5150.000	26.87	19.66	46.53	54.00	-7.47	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -CDD		
Remark:			

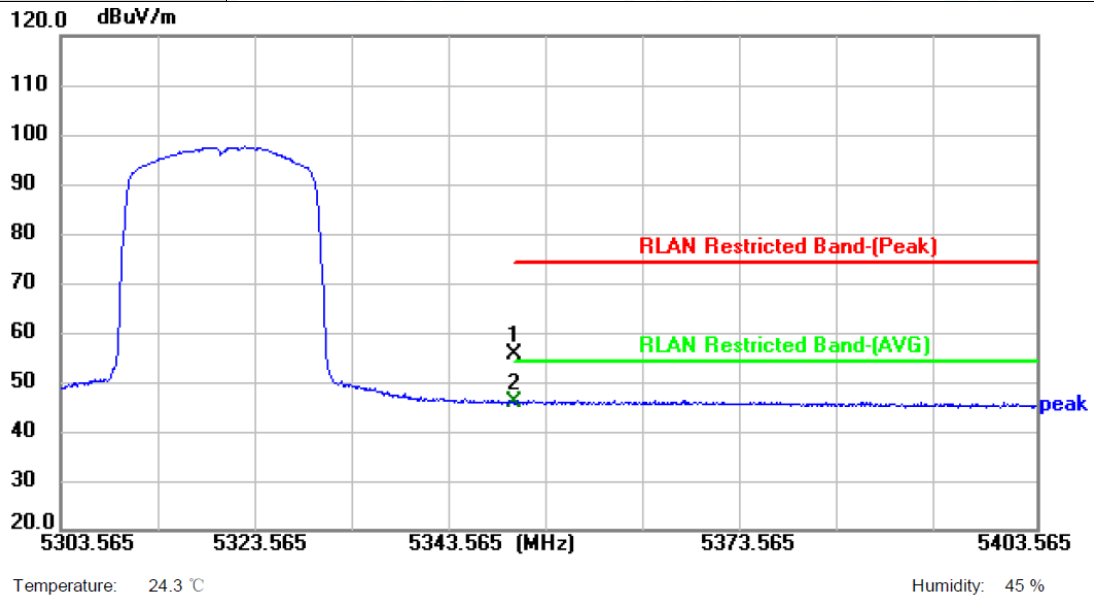


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	35.62	20.07	55.69	74.00	-18.31	peak	P
2 *	5350.000	25.82	20.07	45.89	54.00	-8.11	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) -CDD		
Remark:			

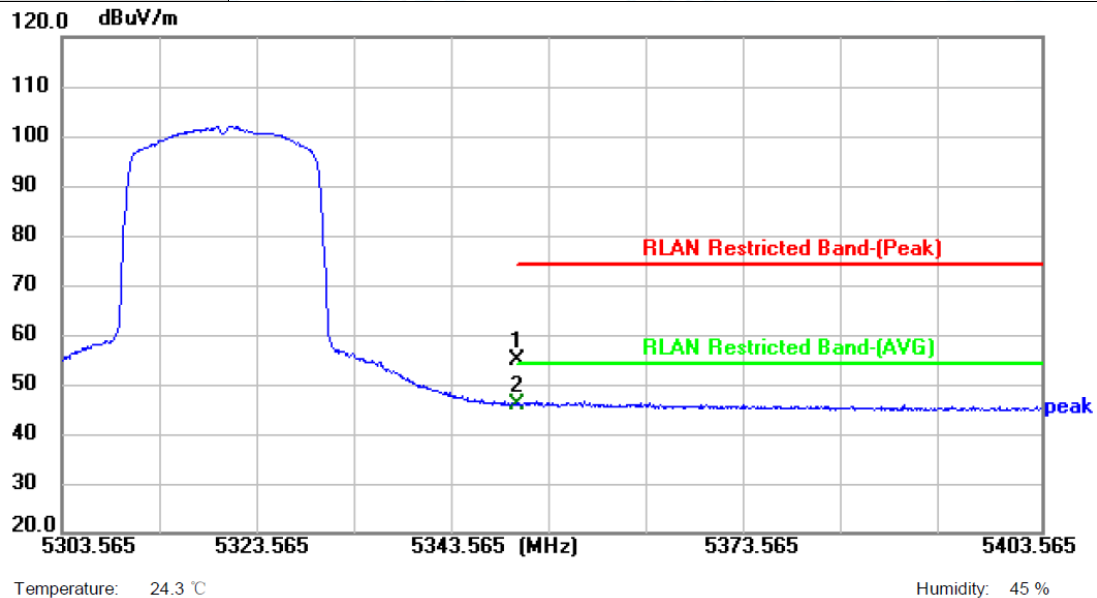


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	34.90	20.07	54.97	74.00	-19.03	peak	P
2 *	5350.000	25.94	20.07	46.01	54.00	-7.99	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

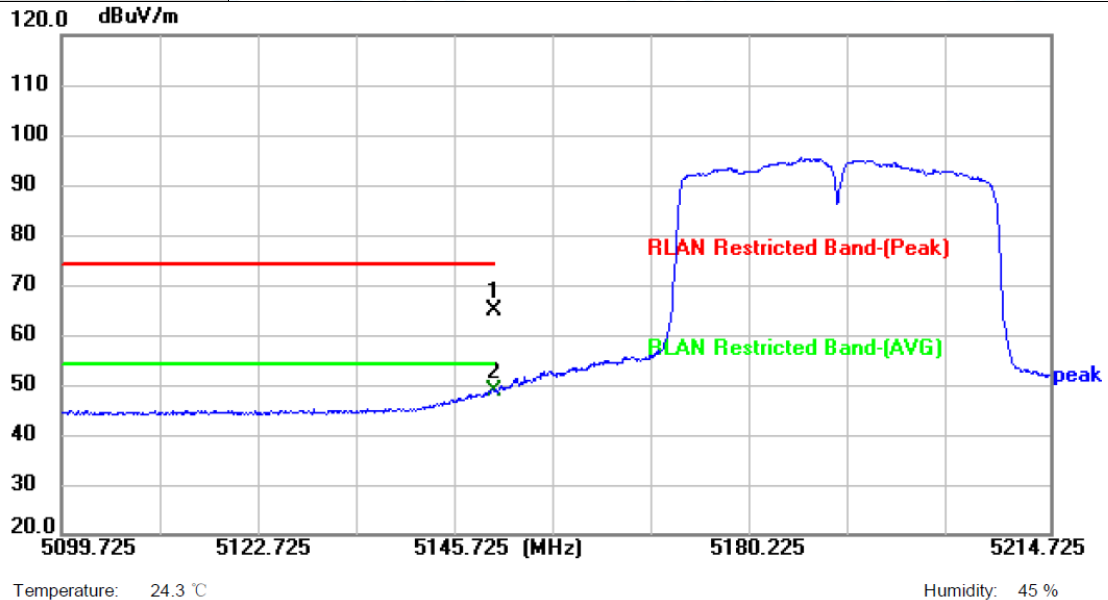


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.02	19.66	64.68	74.00	-9.32	peak	P
2 *	5150.000	28.96	19.66	48.62	54.00	-5.38	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

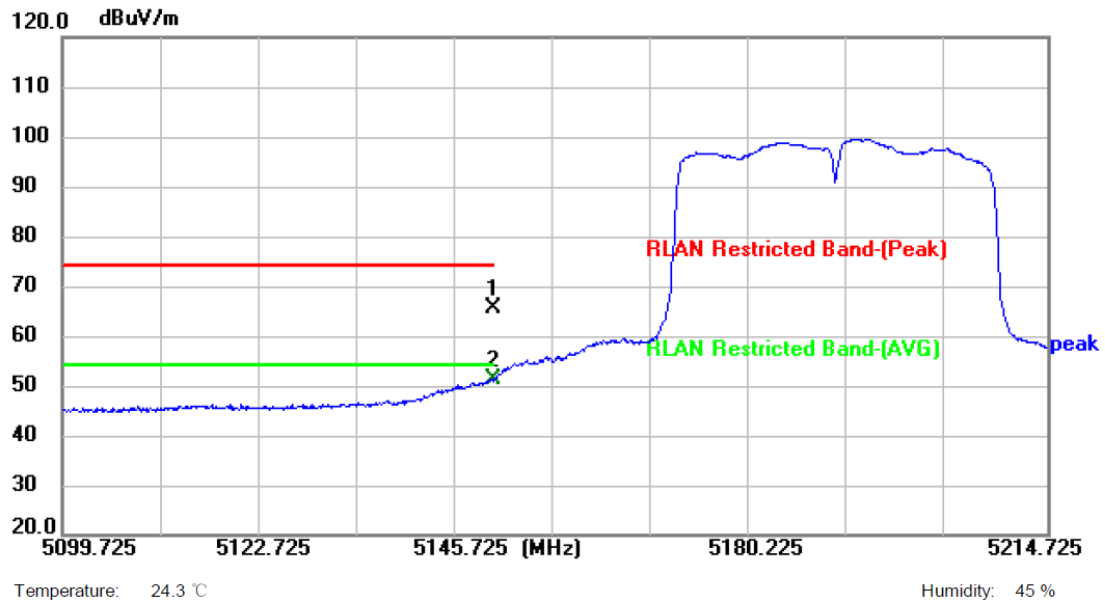


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.82	19.66	65.48	74.00	-8.52	peak	P
2 *	5150.000	31.69	19.66	51.35	54.00	-2.65	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

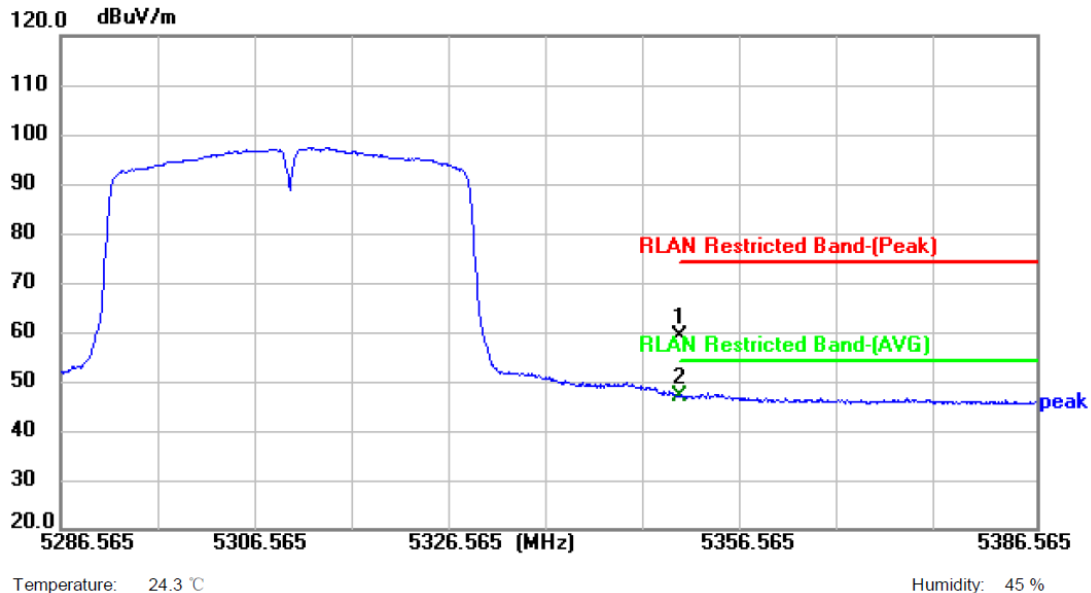


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	38.99	20.07	59.06	74.00	-14.94	peak	P
2 *	5350.000	27.05	20.07	47.12	54.00	-6.88	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

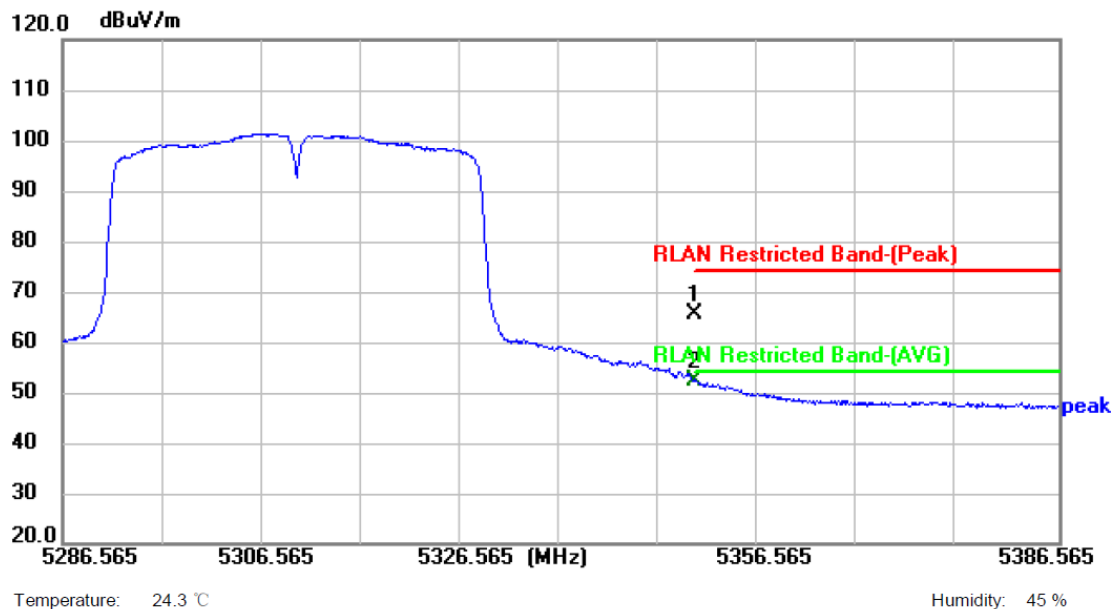


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	45.62	20.07	65.69	74.00	-8.31	peak	P
2 *	5350.000	32.23	20.07	52.30	54.00	-1.70	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

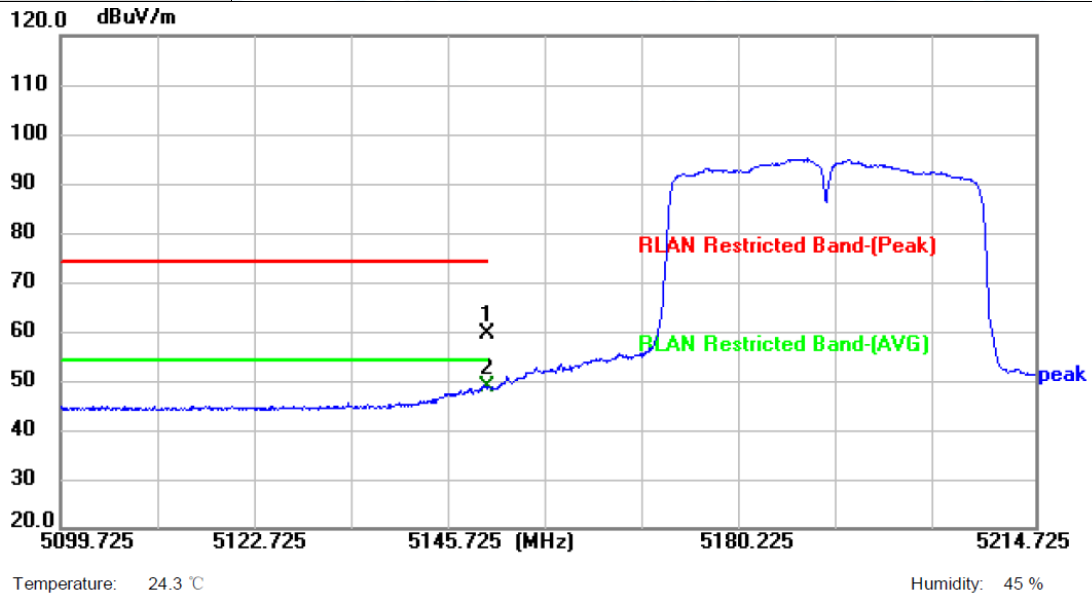


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	39.78	19.66	59.44	74.00	-14.56	peak	P
2 *	5150.000	29.22	19.66	48.88	54.00	-5.12	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

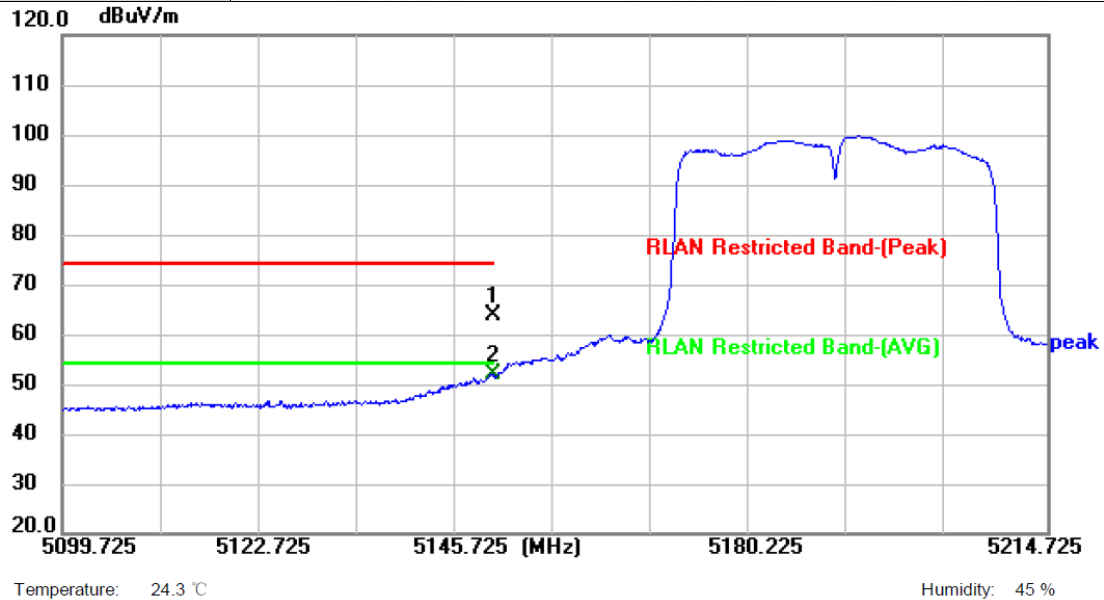


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.00	19.66	63.66	74.00	-10.34	peak	P
2 *	5150.000	32.17	19.66	51.83	54.00	-2.17	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

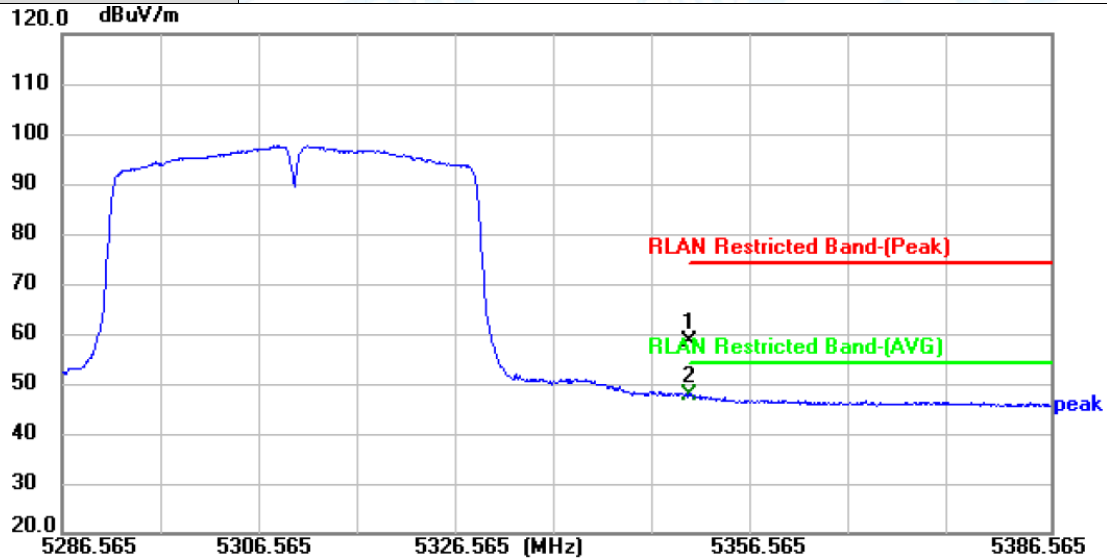

Temperature: 24.3 °C

Humidity: 45 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	38.28	20.07	58.35	74.00	-15.65	peak	P
2 *	5350.000	27.49	20.07	47.56	54.00	-6.44	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

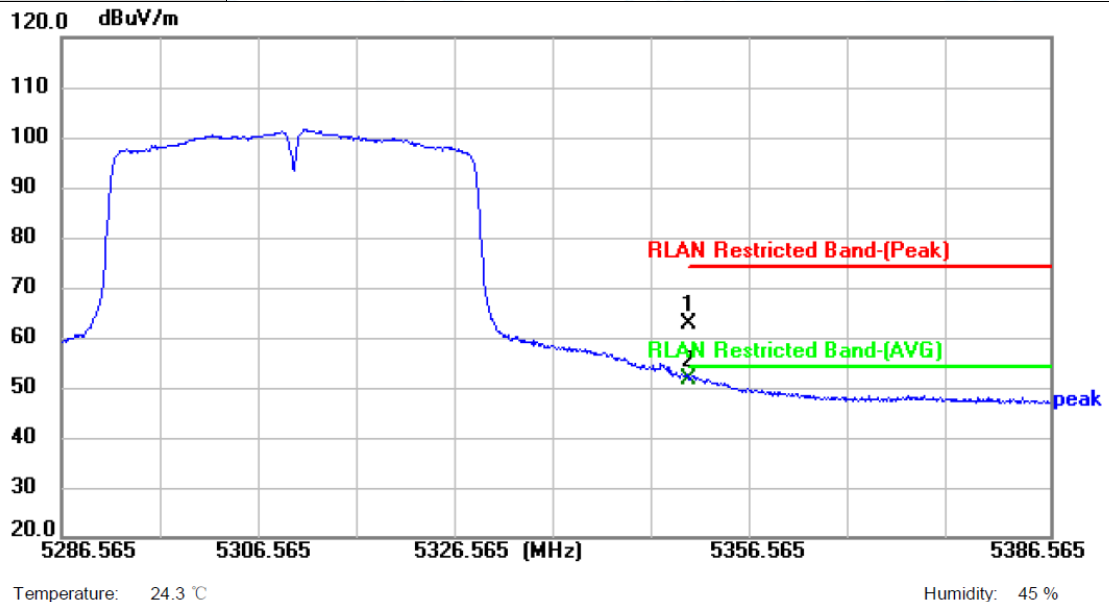


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.54	20.07	62.61	74.00	-11.39	peak	P
2 *	5350.000	31.64	20.07	51.71	54.00	-2.29	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

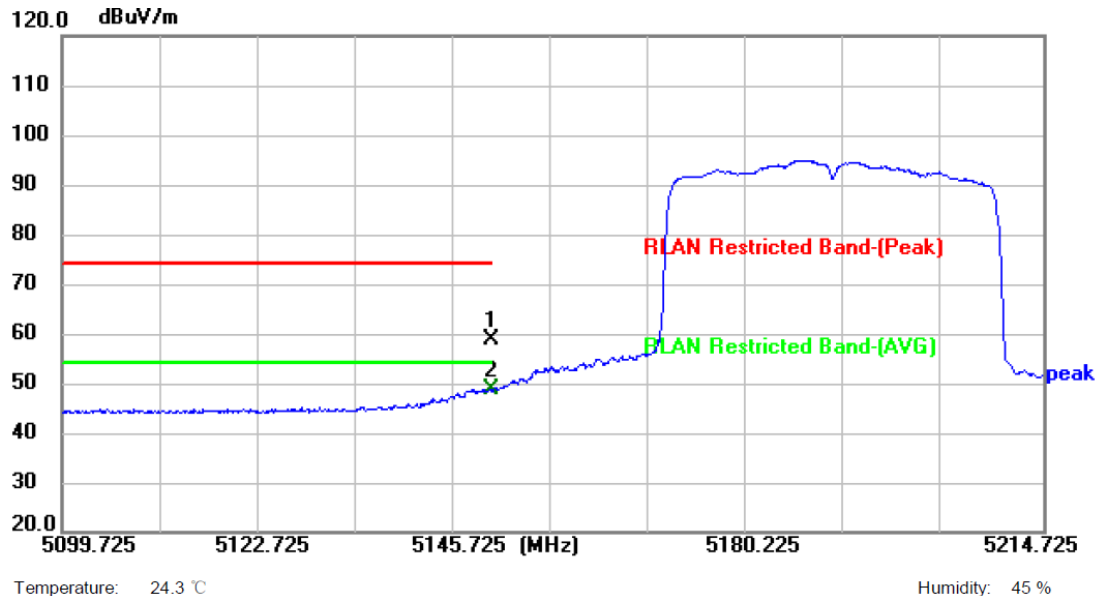


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	39.23	19.66	58.89	74.00	-15.11	peak	P
2 *	5150.000	29.04	19.66	48.70	54.00	-5.30	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) -CDD		
Remark:			

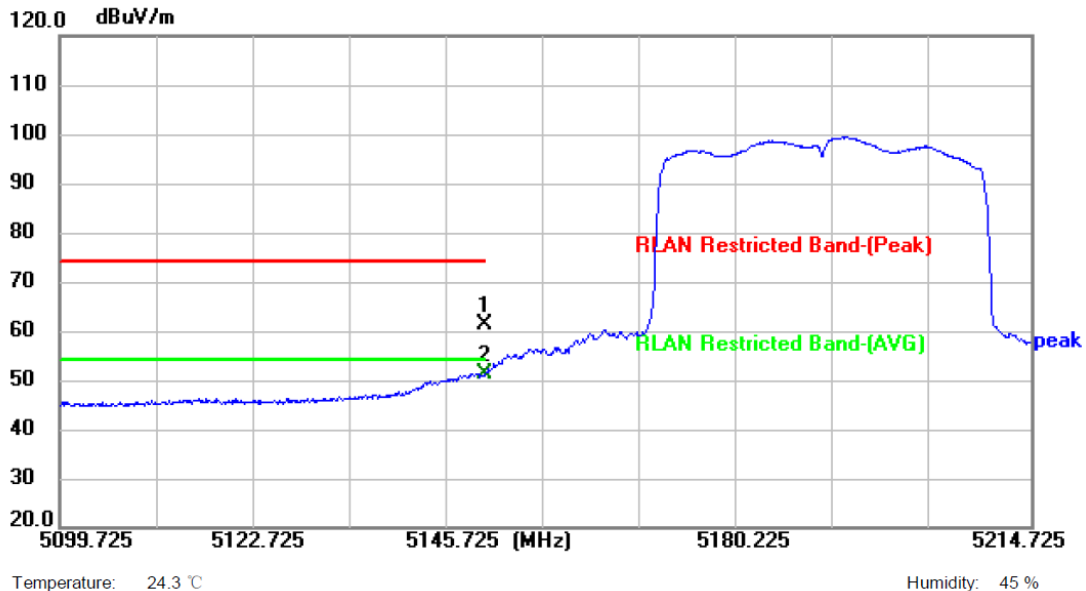


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	41.73	19.66	61.39	74.00	-12.61	peak	P
2 *	5150.000	31.53	19.66	51.19	54.00	-2.81	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

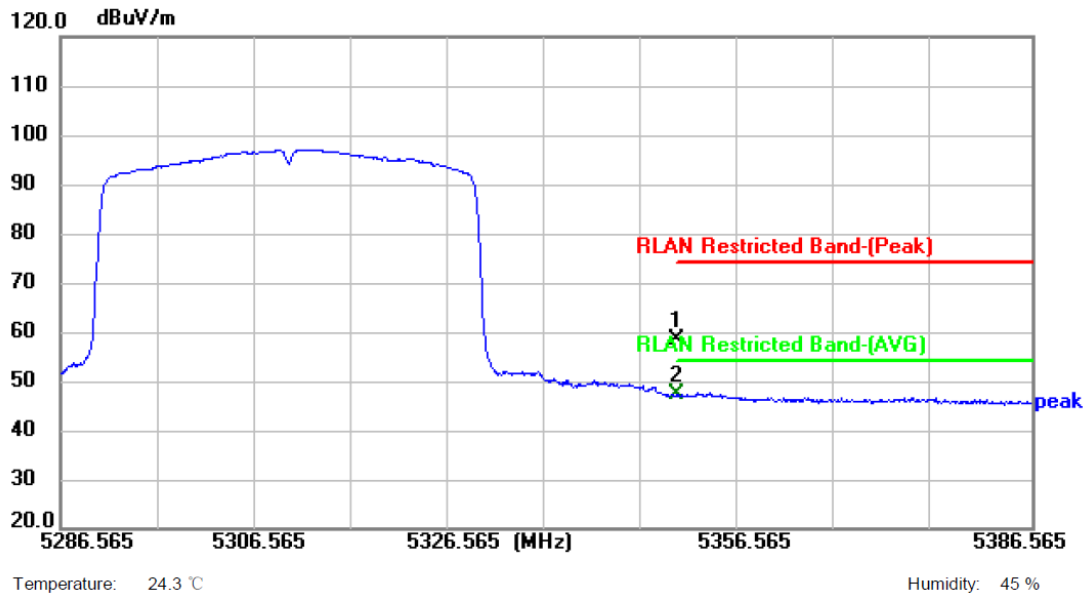


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	38.18	20.07	58.25	74.00	-15.75	peak	P
2 *	5350.000	27.15	20.07	47.22	54.00	-6.78	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) -CDD		
Remark:			

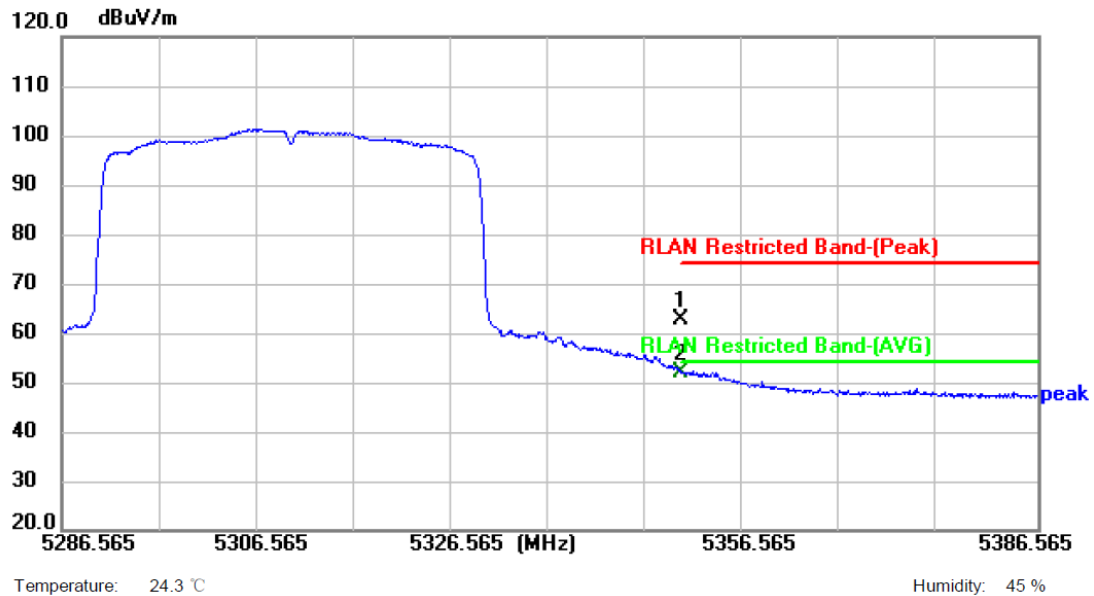


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.55	20.07	62.62	74.00	-11.38	peak	P
2 *	5350.000	31.99	20.07	52.06	54.00	-1.94	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD		
Remark:			

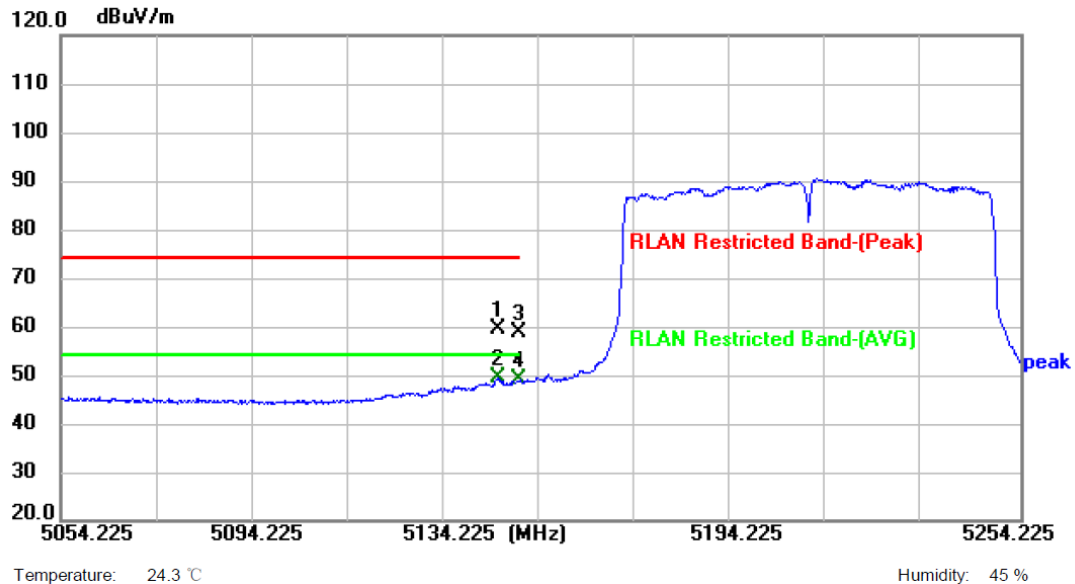


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5145.425	39.76	19.65	59.41	74.00	-14.59	peak	P
2 *	5145.425	29.85	19.65	49.50	54.00	-4.50	AVG	P
3	5150.000	38.94	19.66	58.60	74.00	-15.40	peak	P
4	5150.000	29.42	19.66	49.08	54.00	-4.92	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD		
Remark:			

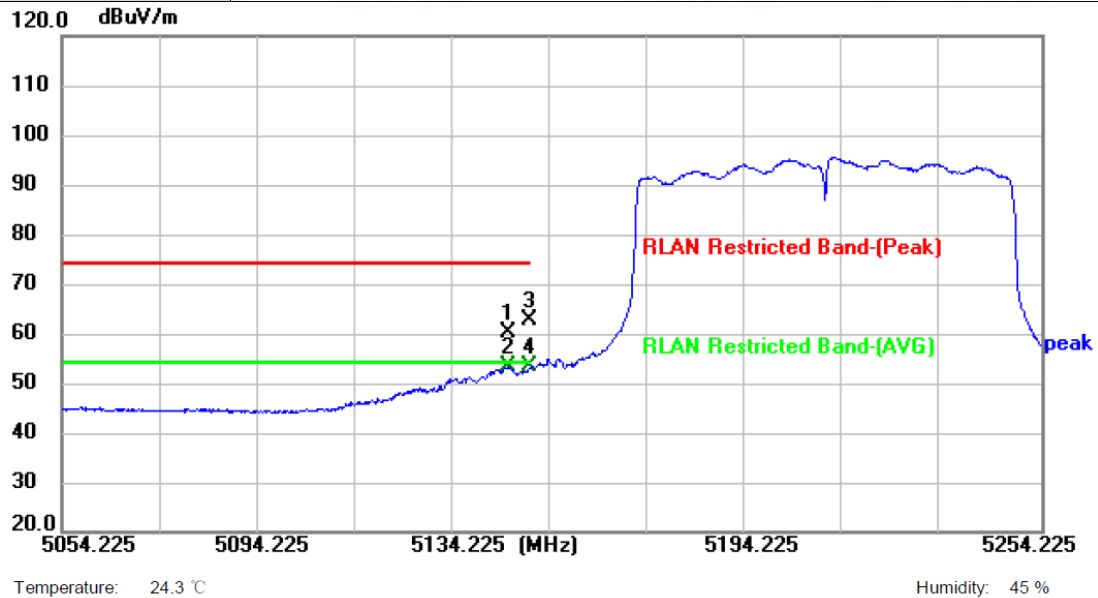


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5145.425	40.59	19.65	60.24	74.00	-13.76	peak	P
2 *	5145.425	33.57	19.65	53.22	54.00	-0.78	AVG	P
3	5150.000	43.18	19.66	62.84	74.00	-11.16	peak	P
4	5150.000	33.56	19.66	53.22	54.00	-0.78	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD		
Remark:			

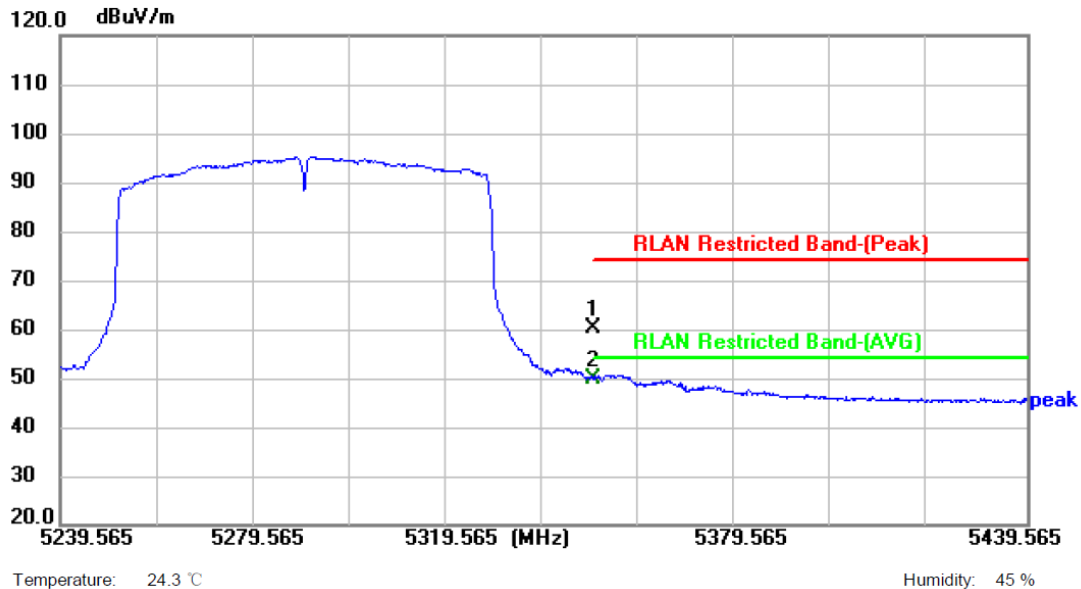


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	40.15	20.07	60.22	74.00	-13.78	peak	P
2 *	5350.000	29.65	20.07	49.72	54.00	-4.28	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD		
Remark:			

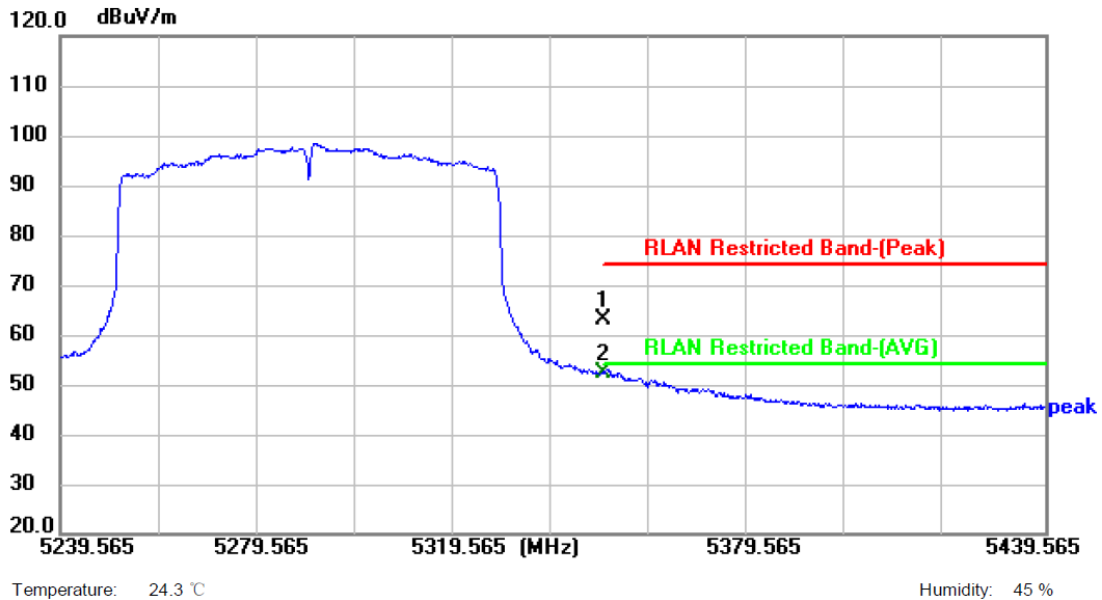


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.09	20.07	63.16	74.00	-10.84	peak	P
2 *	5350.000	32.41	20.07	52.48	54.00	-1.52	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD		
Remark:			

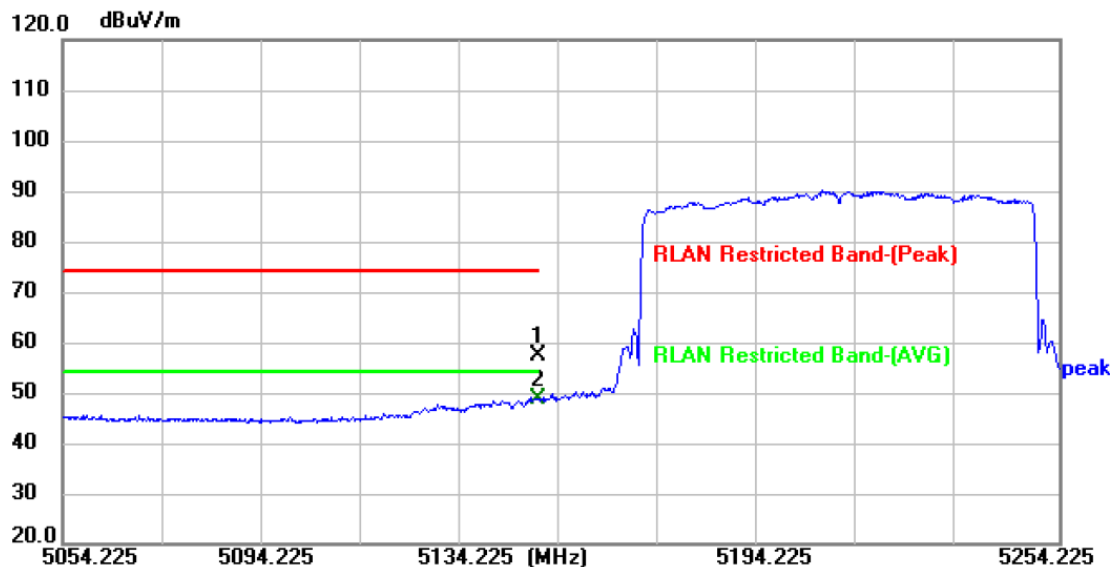

Temperature: 24.3 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	37.51	19.66	57.17	74.00	-16.83	peak	P
2 *	5150.000	29.26	19.66	48.92	54.00	-5.08	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) -CDD		
Remark:			

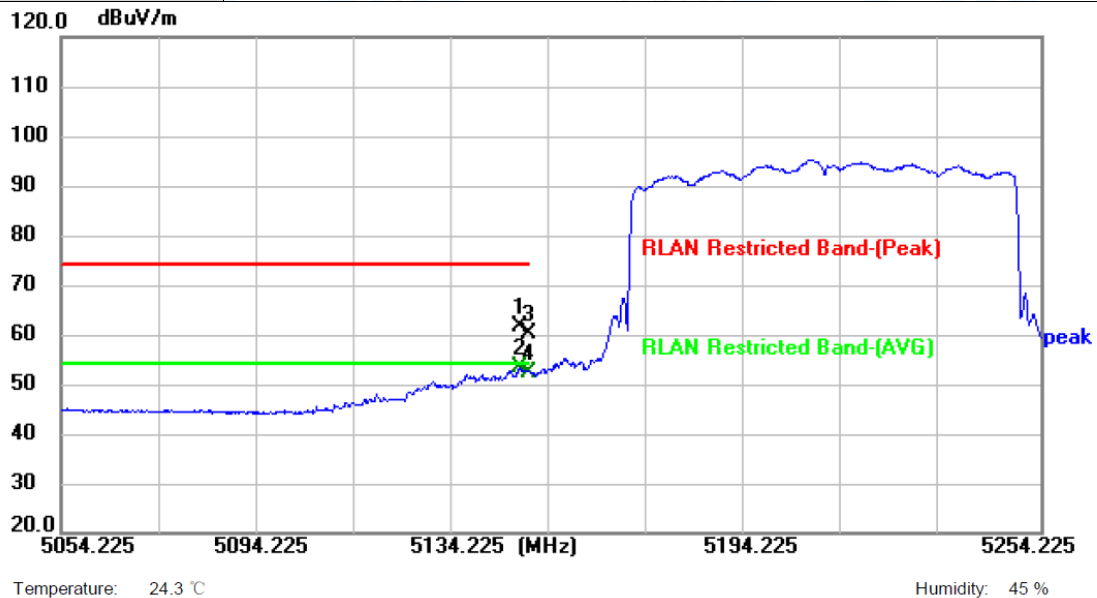


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5148.025	41.81	19.66	61.47	74.00	-12.53	peak	P
2 *	5148.025	33.69	19.66	53.35	54.00	-0.65	AVG	P
3	5150.000	40.66	19.66	60.32	74.00	-13.68	peak	P
4	5150.000	32.82	19.66	52.48	54.00	-1.52	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -CDD		
Remark:			

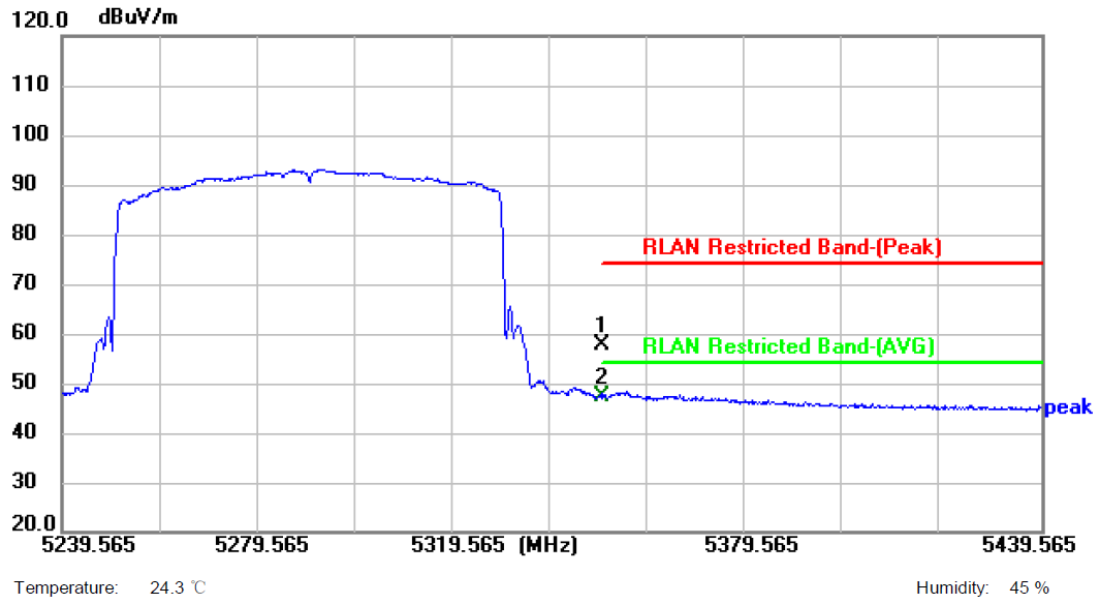


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	37.55	20.07	57.62	74.00	-16.38	peak	P
2 *	5350.000	27.17	20.07	47.24	54.00	-6.76	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) -CDD		
Remark:			

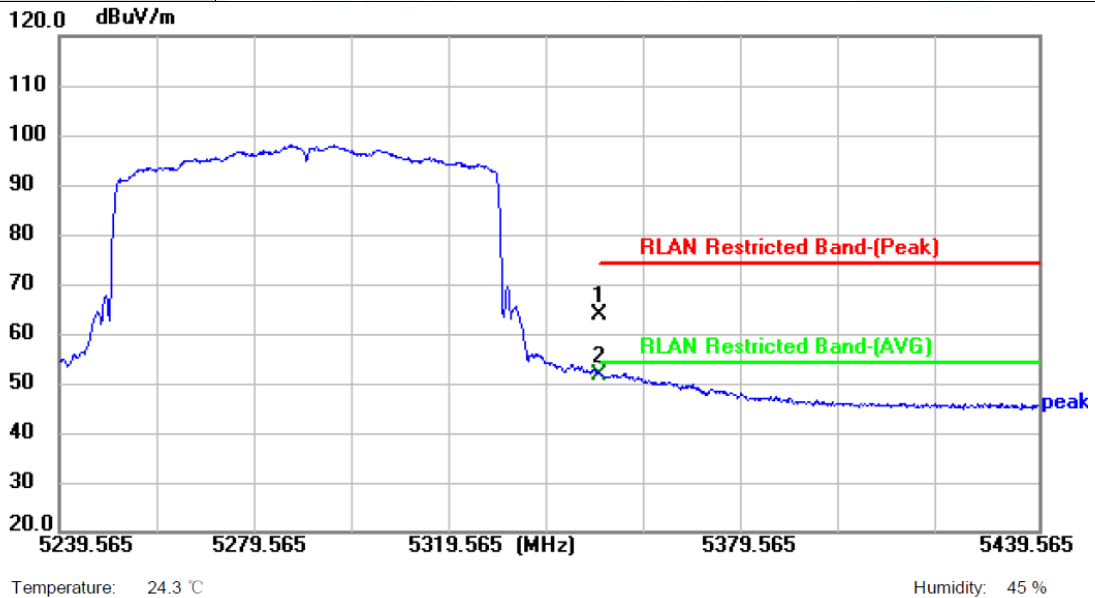


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.81	20.07	63.88	74.00	-10.12	peak	P
2 *	5350.000	31.43	20.07	51.50	54.00	-2.50	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD		
Remark:			

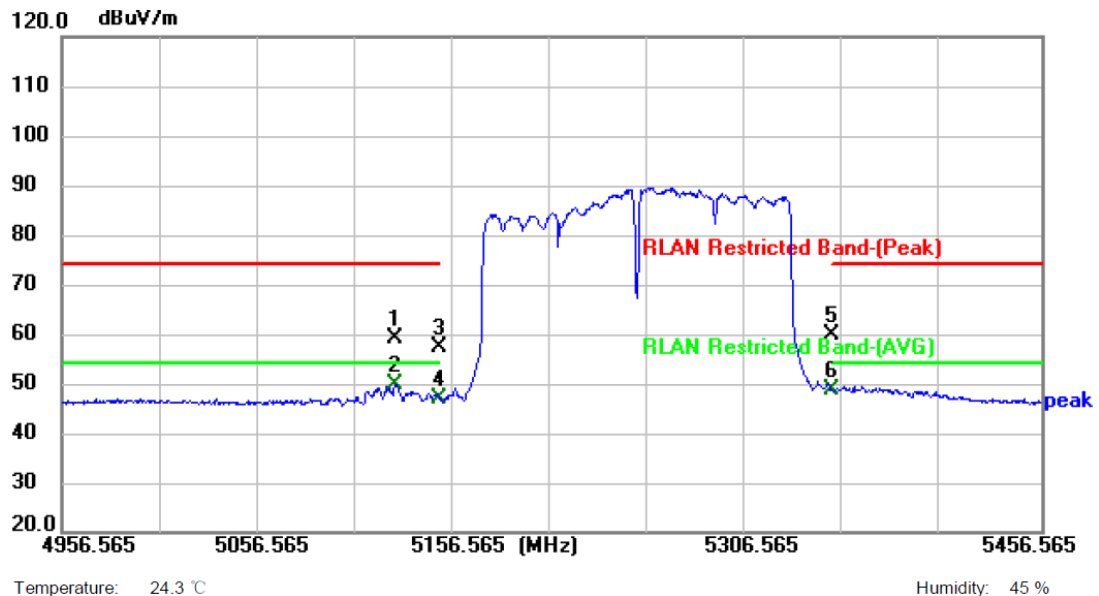


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5127.065	39.68	19.60	59.28	74.00	-14.72	peak	P
2 *	5127.065	30.33	19.60	49.93	54.00	-4.07	AVG	P
3	5150.000	37.61	19.66	57.27	74.00	-16.73	peak	P
4	5150.000	27.47	19.66	47.13	54.00	-6.87	AVG	P
5	5350.000	39.74	20.07	59.81	74.00	-14.19	peak	P
6	5350.000	28.54	20.07	48.61	54.00	-5.39	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) -CDD		
Remark:			

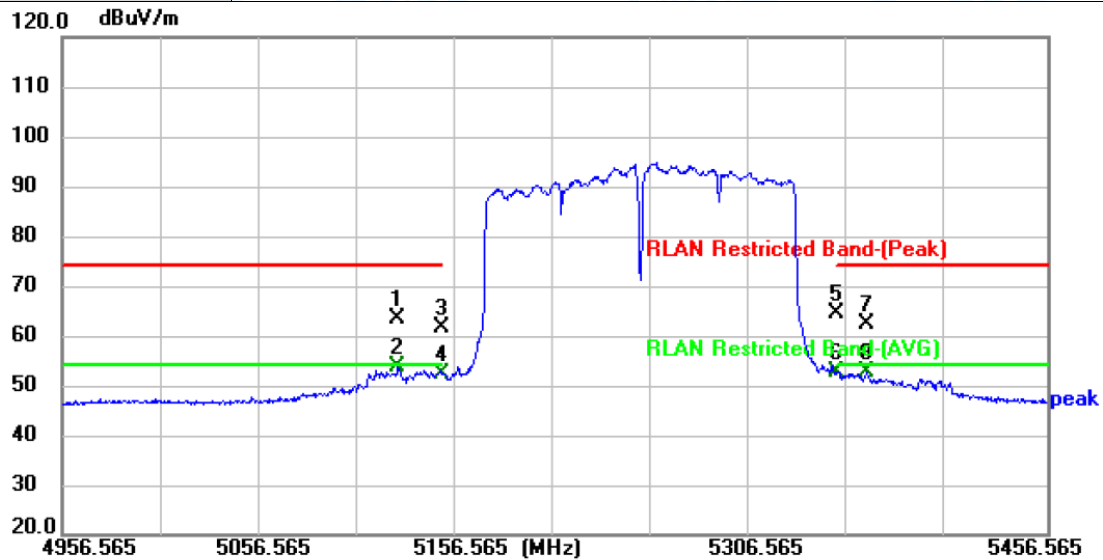

Temperature: 24.3 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5127.065	43.72	19.60	63.32	74.00	-10.68	peak	P
2 *	5127.065	34.19	19.60	53.79	54.00	-0.21	AVG	P
3	5150.000	41.96	19.66	61.62	74.00	-12.38	peak	P
4	5150.000	32.80	19.66	52.46	54.00	-1.54	AVG	P
5	5350.000	44.25	20.07	64.32	74.00	-9.68	peak	P
6	5350.000	32.52	20.07	52.59	54.00	-1.41	AVG	P
7	5364.565	42.23	20.02	62.25	74.00	-11.75	peak	P
8	5364.565	32.81	20.02	52.83	54.00	-1.17	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD		
Remark:			

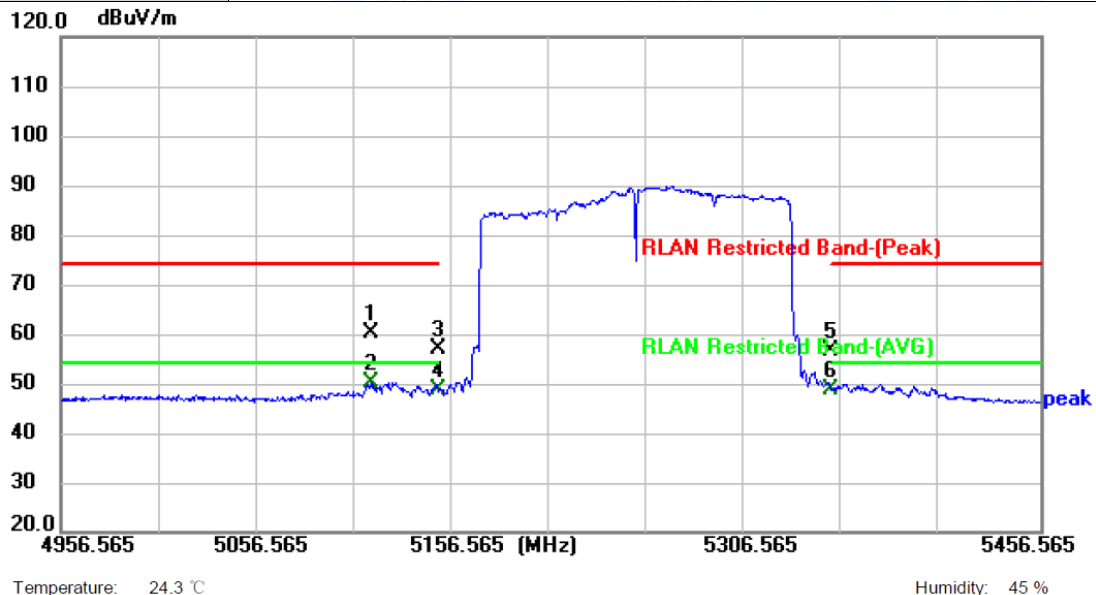


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5114.565	40.59	19.56	60.15	74.00	-13.85	peak	P
2 *	5114.565	30.69	19.56	50.25	54.00	-3.75	AVG	P
3	5150.000	37.39	19.66	57.05	74.00	-16.95	peak	P
4	5150.000	29.14	19.66	48.80	54.00	-5.20	AVG	P
5	5350.000	36.71	20.07	56.78	74.00	-17.22	peak	P
6	5350.000	28.83	20.07	48.90	54.00	-5.10	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) -CDD		
Remark:			

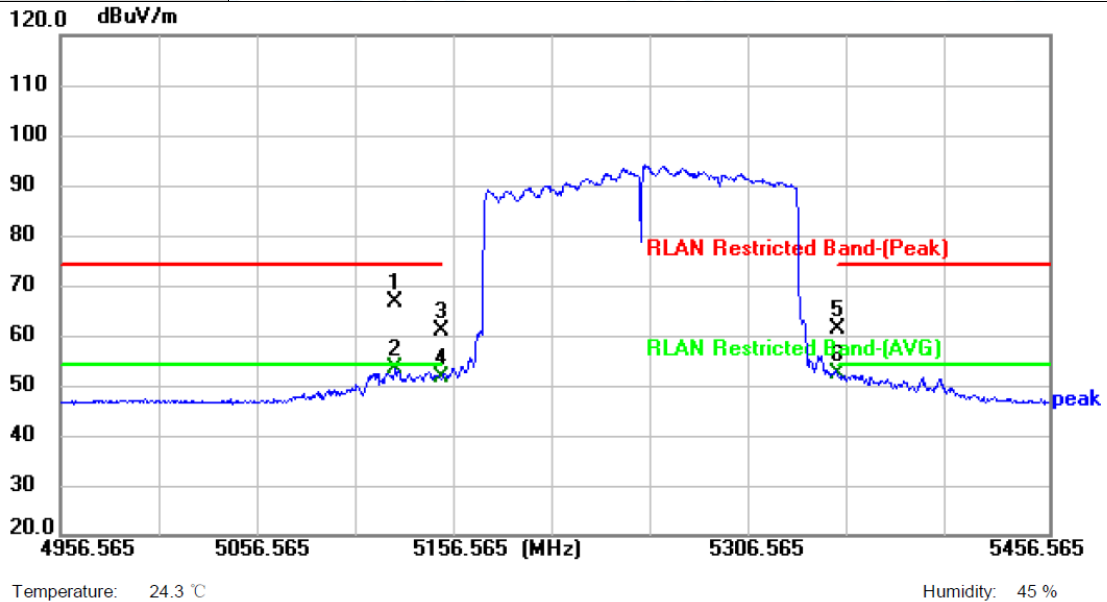

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5126.065	47.12	19.59	66.71	74.00	-7.29	peak	P
2 *	5126.065	33.83	19.59	53.42	54.00	-0.58	AVG	P
3	5150.000	41.17	19.66	60.83	74.00	-13.17	peak	P
4	5150.000	31.97	19.66	51.63	54.00	-2.37	AVG	P
5	5350.000	41.26	20.07	61.33	74.00	-12.67	peak	P
6	5350.000	32.30	20.07	52.37	54.00	-1.63	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)-CDD		
Remark:			

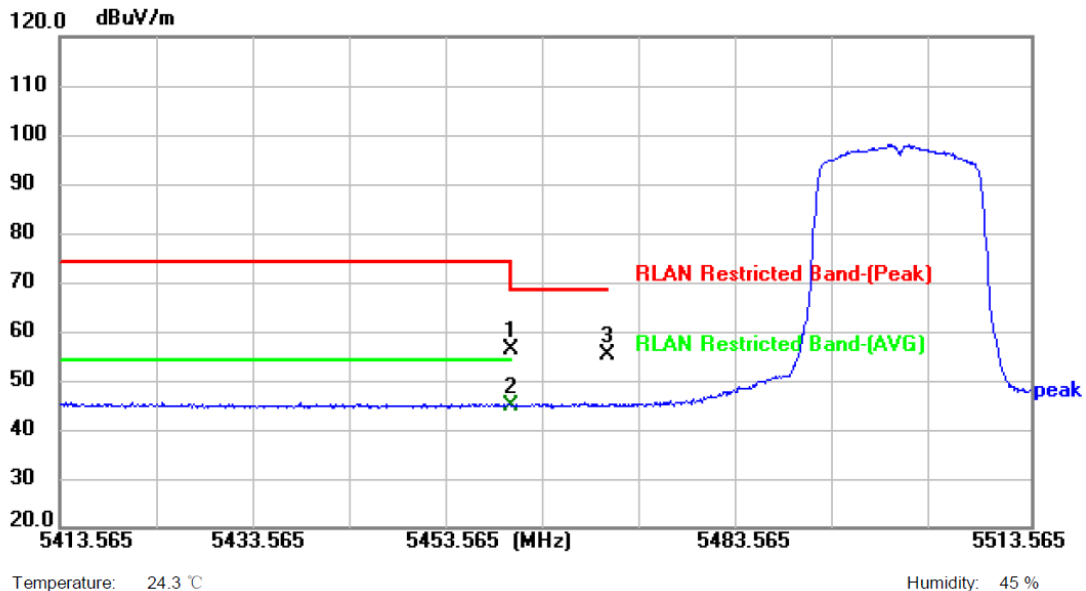


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.98	20.12	56.10	68.30	-12.20	peak	P
2 *	5460.000	24.83	20.12	44.95	54.00	-9.05	AVG	P
3	5470.000	34.94	20.07	55.01	68.30	-13.29	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C) –CDD		
Remark:			

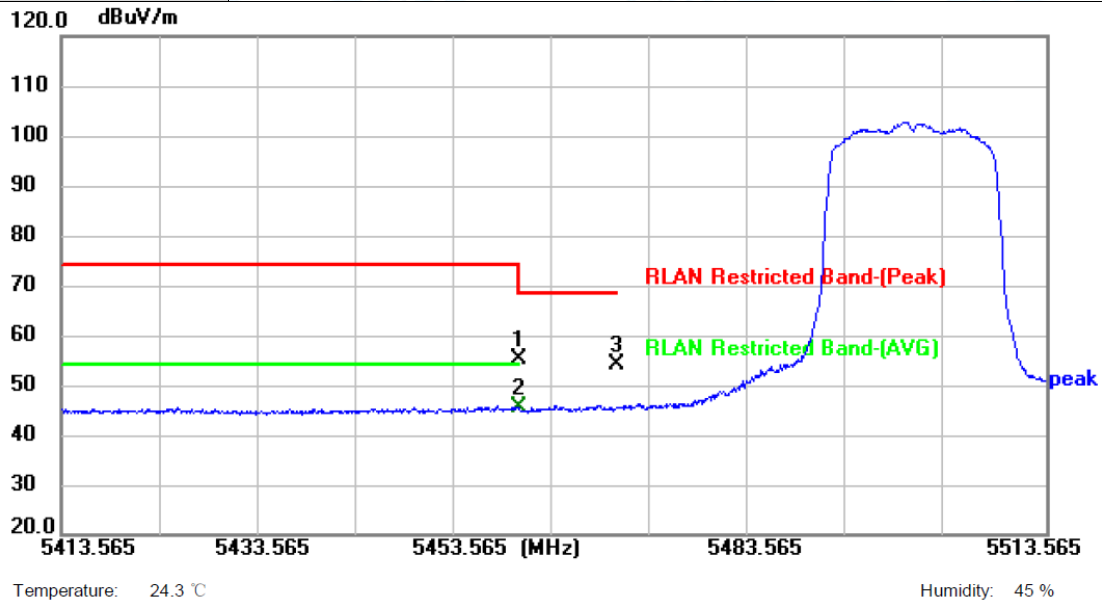


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.13	20.12	55.25	68.30	-13.05	peak	P
2 *	5460.000	25.34	20.12	45.46	54.00	-8.54	AVG	P
3	5470.000	34.18	20.07	54.25	68.30	-14.05	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)-CDD		
Remark:			

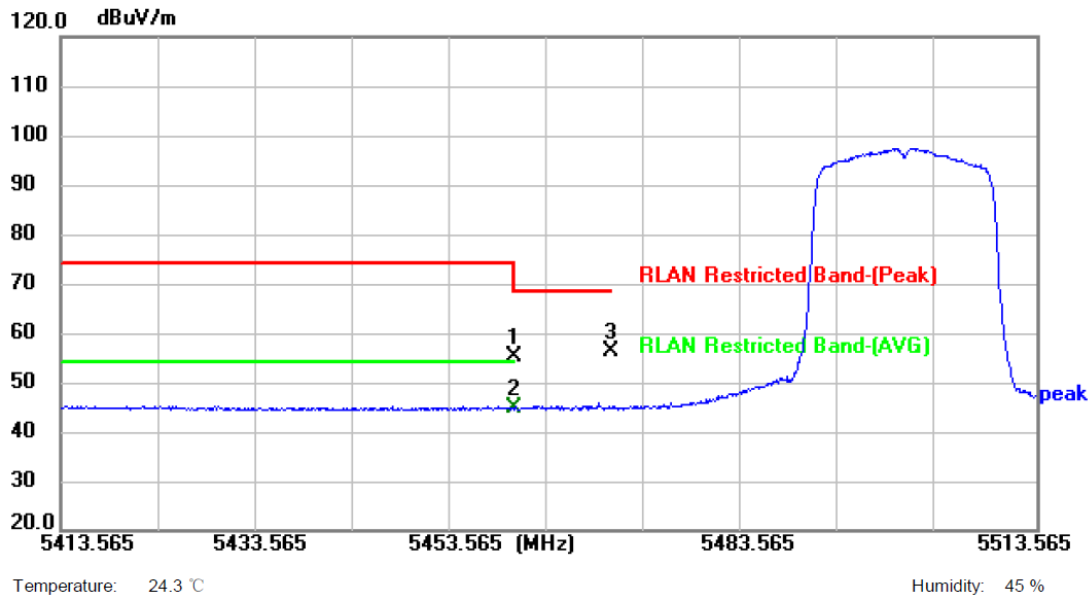


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.14	20.12	55.26	68.30	-13.04	peak	P
2 *	5460.000	24.71	20.12	44.83	54.00	-9.17	AVG	P
3	5470.000	36.32	20.07	56.39	68.30	-11.91	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -CDD		
Remark:			

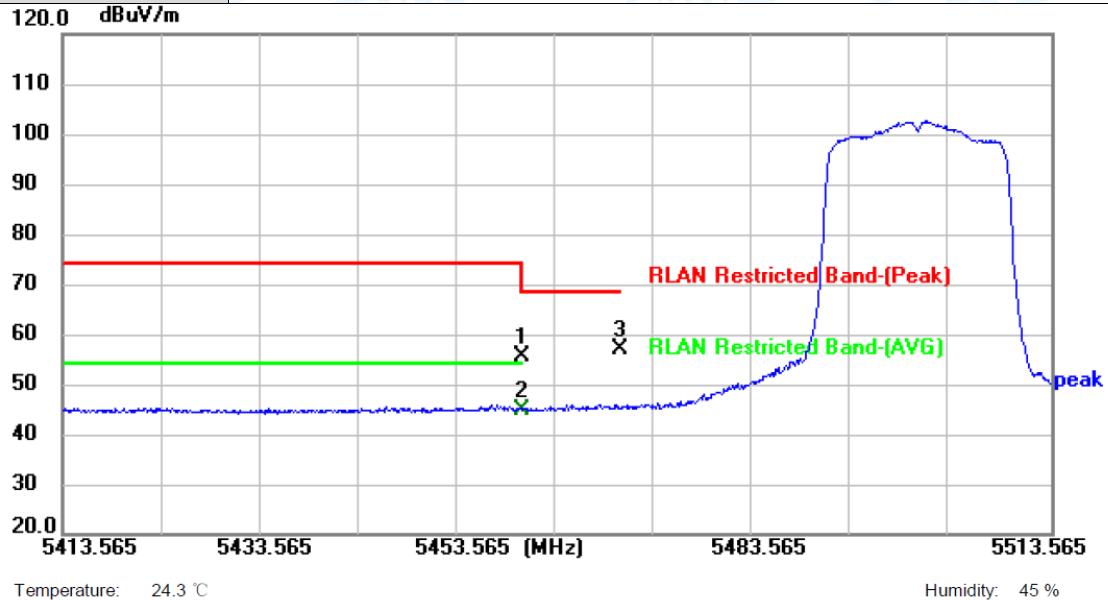

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.57	20.12	55.69	68.30	-12.61	peak	P
2 *	5460.000	24.82	20.12	44.94	54.00	-9.06	AVG	P
3	5470.000	36.95	20.07	57.02	68.30	-11.28	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD		
Remark:			

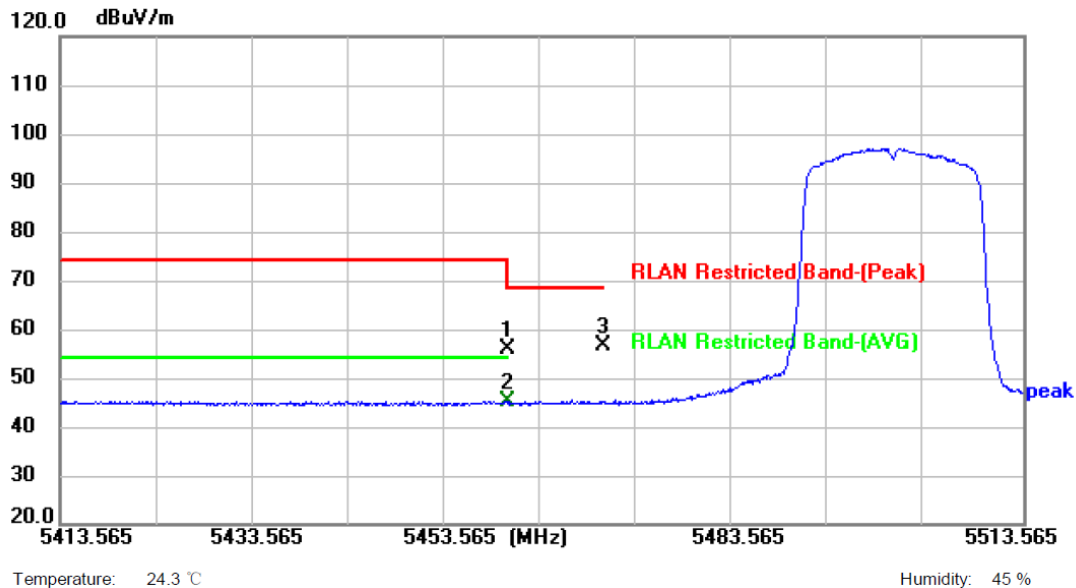

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.70	20.12	55.82	68.30	-12.48	peak	P
2 *	5460.000	24.93	20.12	45.05	54.00	-8.95	AVG	P
3	5470.000	36.45	20.07	56.52	68.30	-11.78	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD		
Remark:			

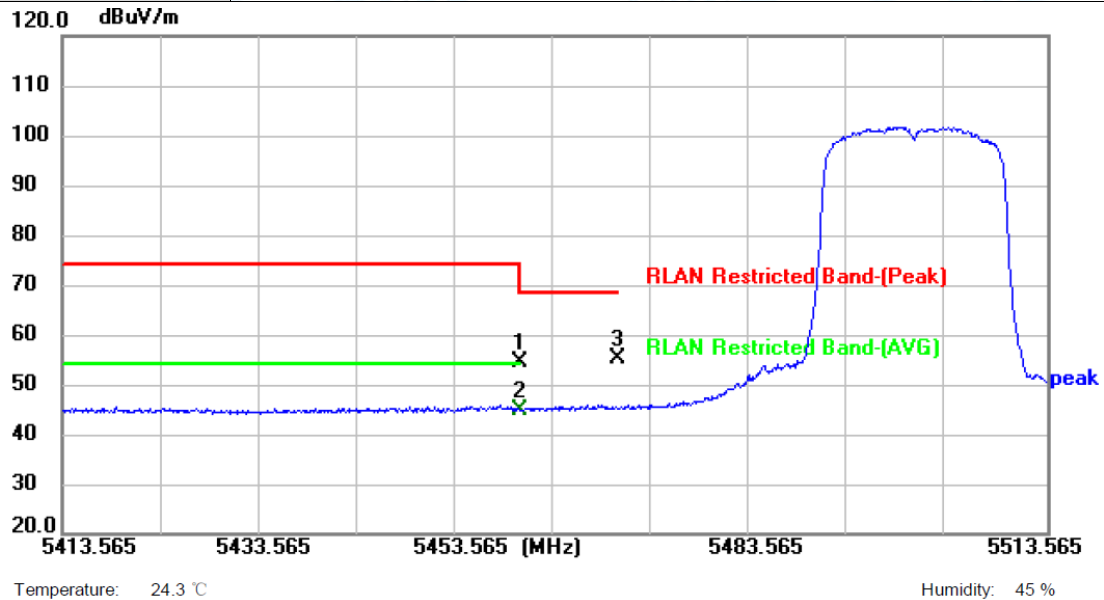


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	34.24	20.12	54.36	68.30	-13.94	peak	P
2 *	5460.000	24.64	20.12	44.76	54.00	-9.24	AVG	P
3	5470.000	35.07	20.07	55.14	68.30	-13.16	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD		
Remark:			

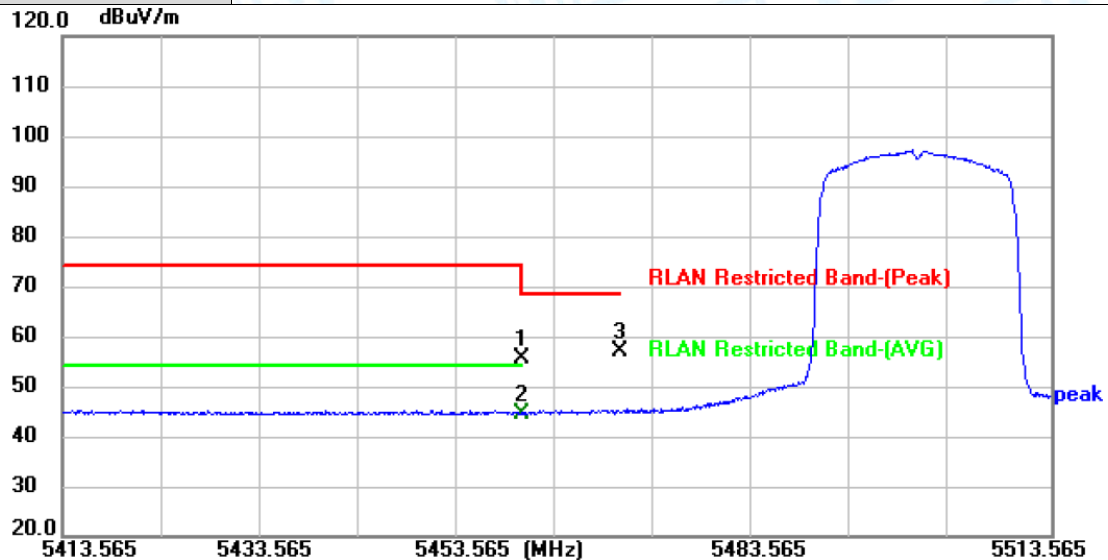

Temperature: 24.3 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.51	20.12	55.63	68.30	-12.67	peak	P
2 *	5460.000	24.50	20.12	44.62	54.00	-9.38	AVG	P
3	5470.000	36.78	20.07	56.85	68.30	-11.45	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) -CDD		
Remark:			

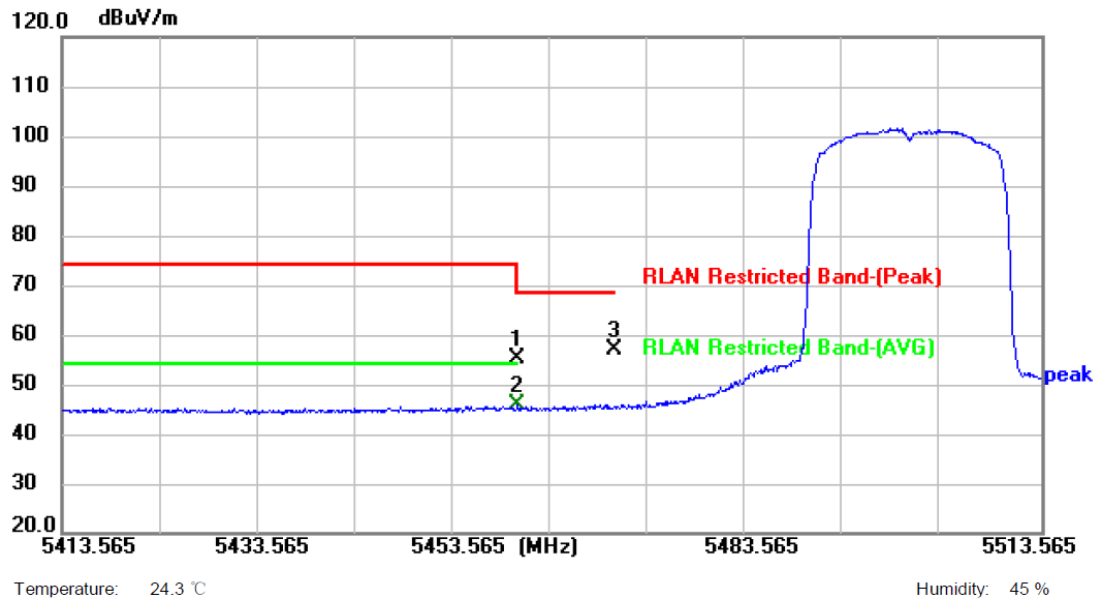

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	34.90	20.12	55.02	68.30	-13.28	peak	P
2 *	5460.000	25.90	20.12	46.02	54.00	-7.98	AVG	P
3	5470.000	36.99	20.07	57.06	68.30	-11.24	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

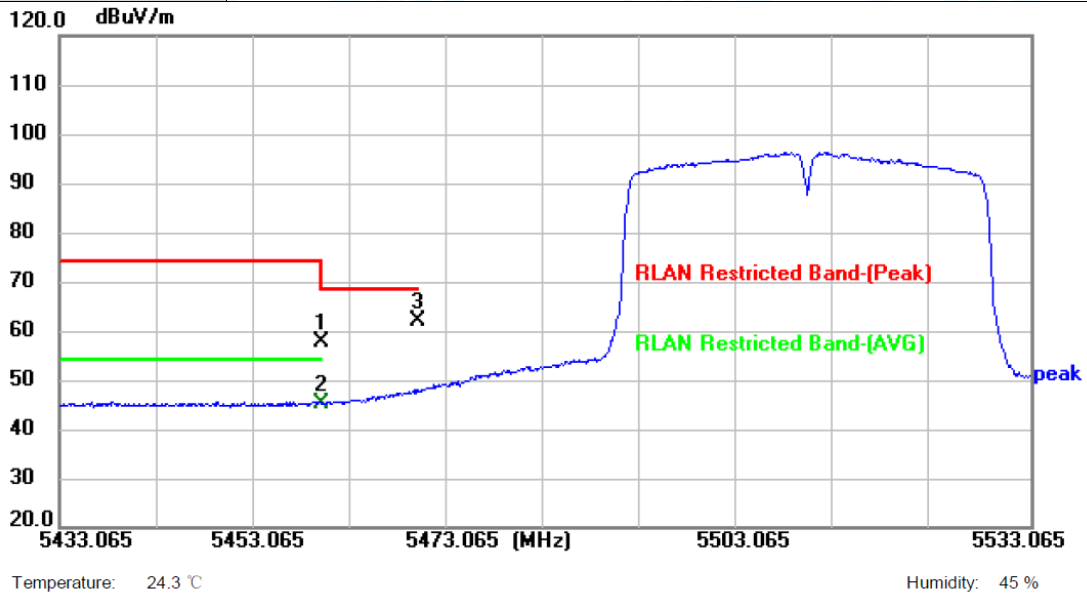


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	37.47	20.12	57.59	68.30	-10.71	peak	P
2	5460.000	25.03	20.12	45.15	54.00	-8.85	AVG	P
3 *	5470.000	41.80	20.07	61.87	68.30	-6.43	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

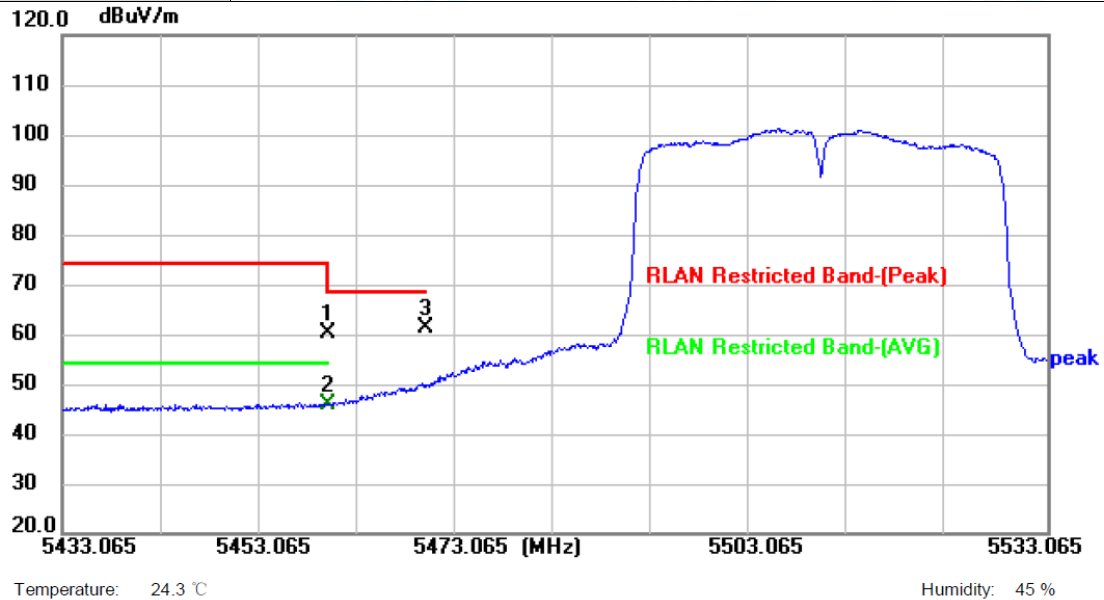


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.02	20.12	60.14	68.30	-8.16	peak	P
2	5460.000	25.84	20.12	45.96	54.00	-8.04	AVG	P
3 *	5470.000	41.05	20.07	61.12	68.30	-7.18	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

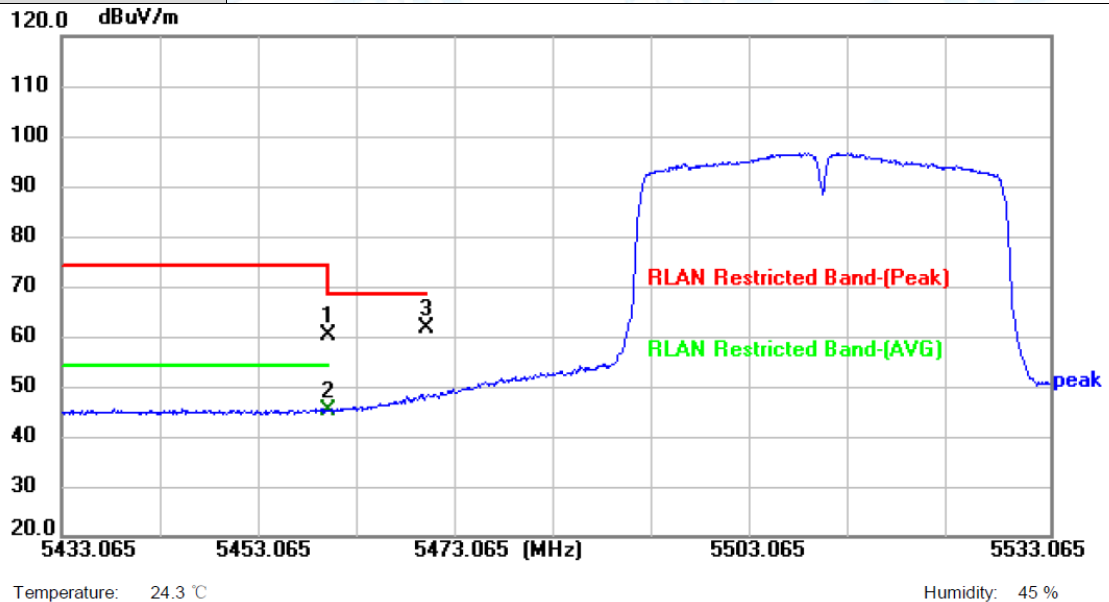

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.13	20.12	60.25	68.30	-8.05	peak	P
2	5460.000	25.18	20.12	45.30	54.00	-8.70	AVG	P
3 *	5470.000	41.45	20.07	61.52	68.30	-6.78	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

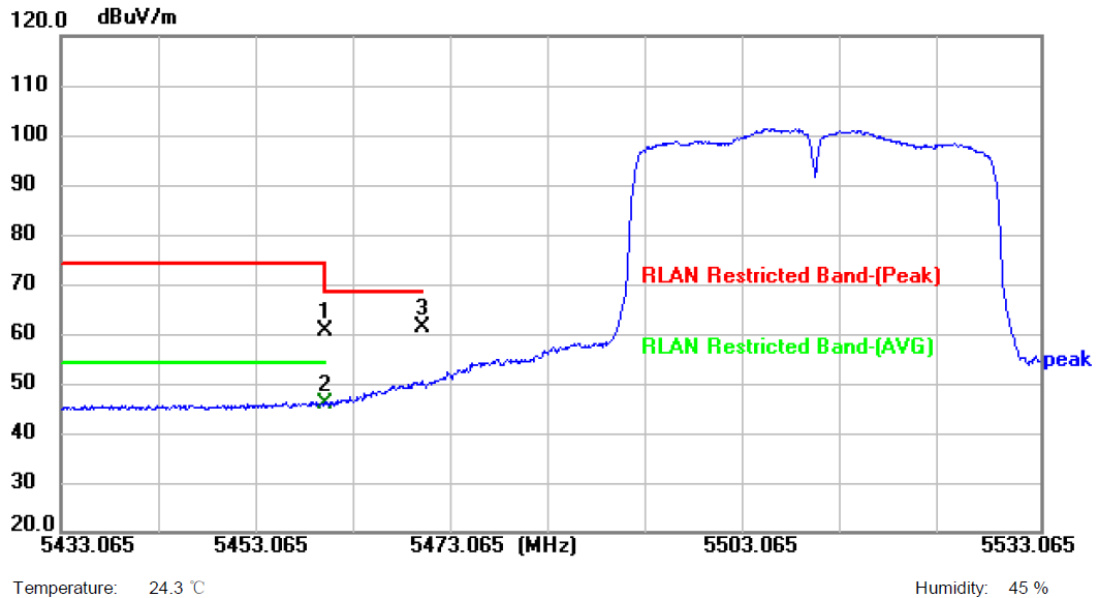


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.26	20.12	60.38	68.30	-7.92	peak	P
2	5460.000	25.76	20.12	45.88	54.00	-8.12	AVG	P
3 *	5470.000	41.20	20.07	61.27	68.30	-7.03	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

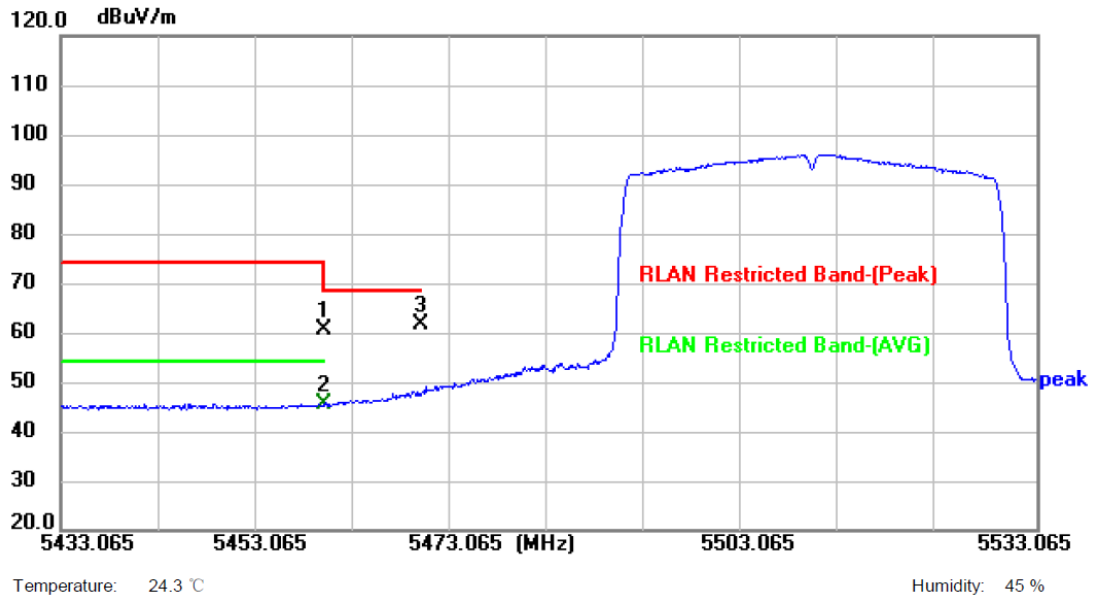

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.42	20.12	60.54	68.30	-7.76	peak	P
2	5460.000	25.51	20.12	45.63	54.00	-8.37	AVG	P
3 *	5470.000	41.41	20.07	61.48	68.30	-6.82	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

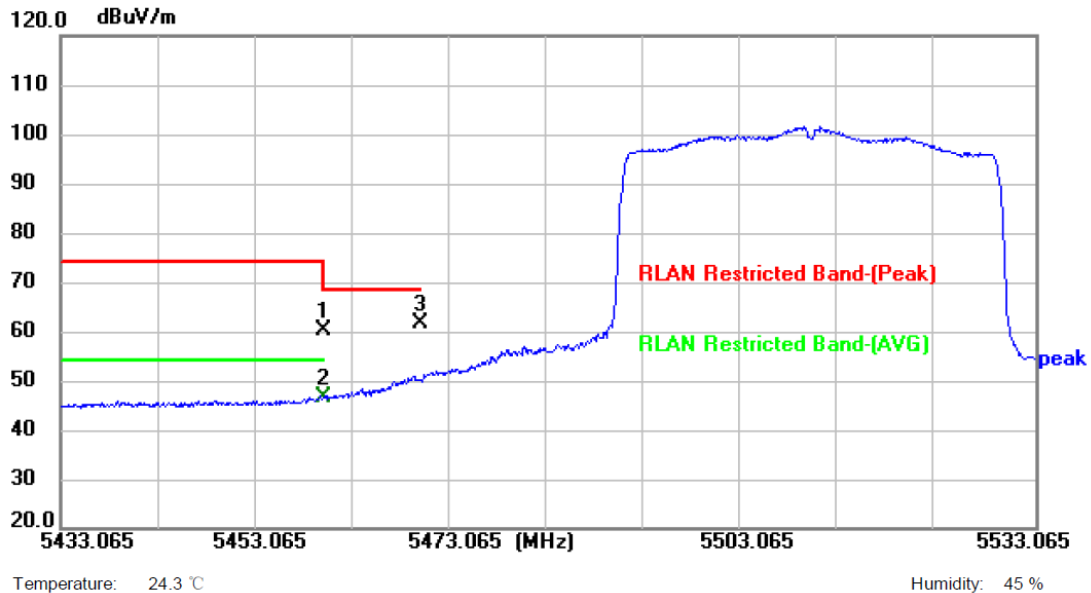


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.05	20.12	60.17	68.30	-8.13	peak	P
2	5460.000	26.43	20.12	46.55	54.00	-7.45	AVG	P
3 *	5470.000	41.49	20.07	61.56	68.30	-6.74	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD		
Remark:			

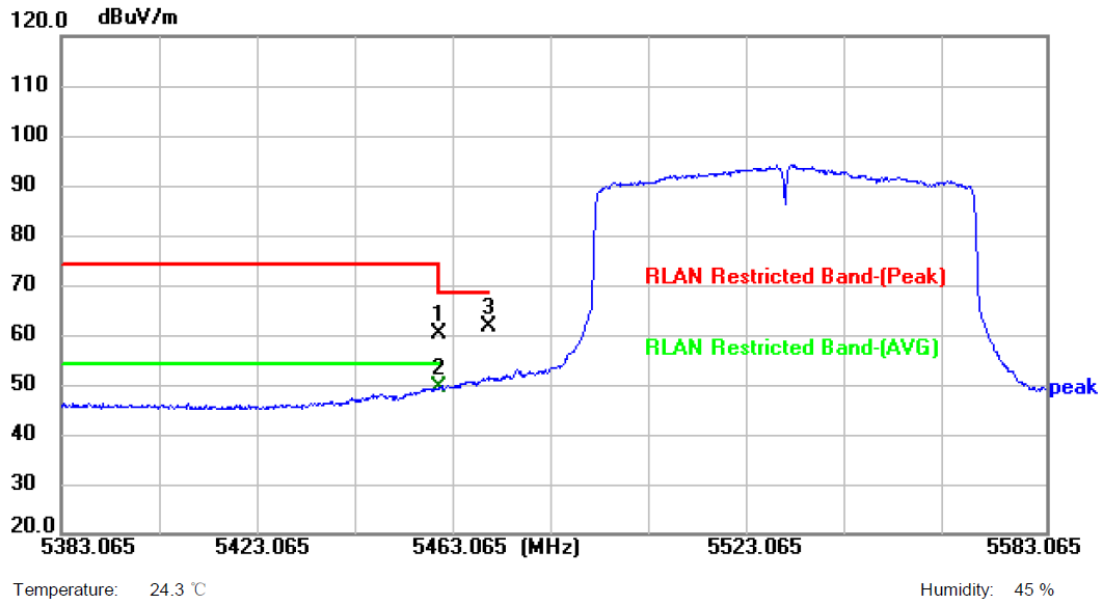


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.21	20.12	60.33	68.30	-7.97	peak	P
2 *	5460.000	29.35	20.12	49.47	54.00	-4.53	AVG	P
3	5470.000	41.58	20.07	61.65	68.30	-6.65	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD		
Remark:			

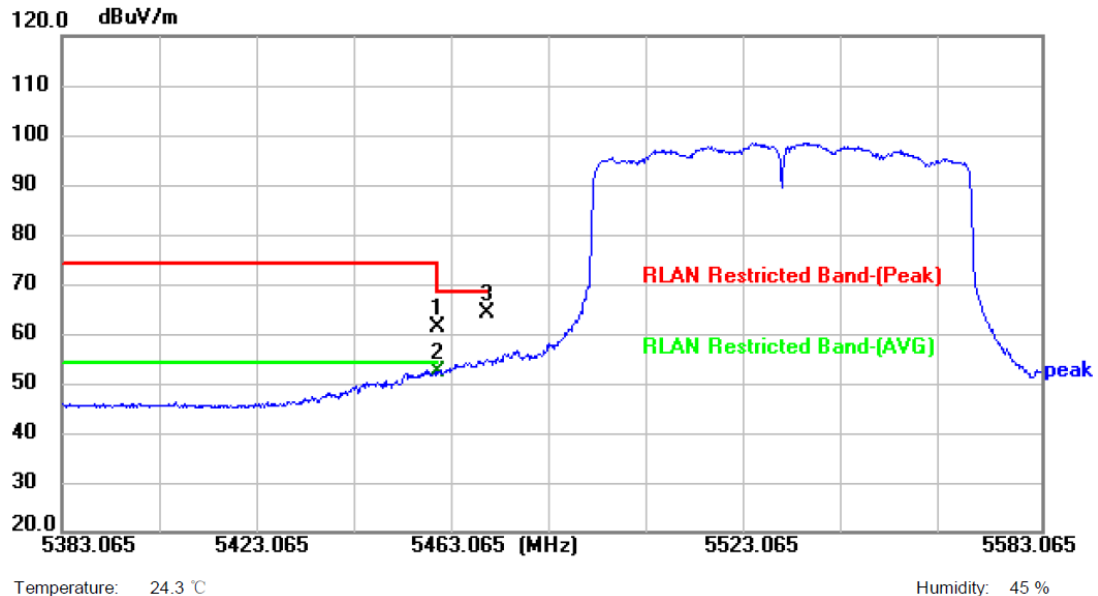


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.14	20.12	61.26	68.30	-7.04	peak	P
2 *	5460.000	32.32	20.12	52.44	54.00	-1.56	AVG	P
3	5470.000	44.01	20.07	64.08	68.30	-4.22	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD		
Remark:			

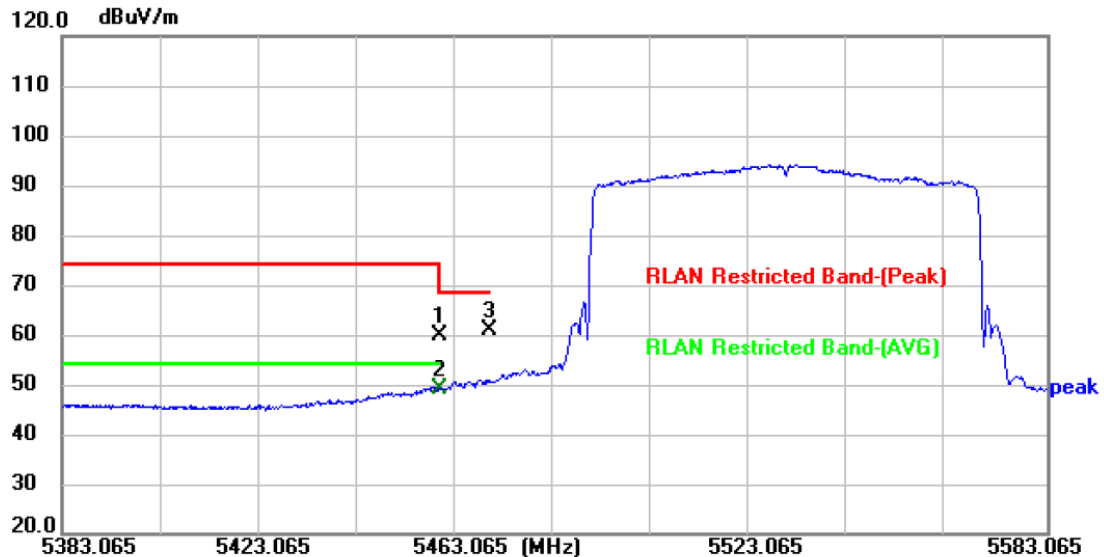

Temperature: 24.3 °C

Humidity: 45 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	39.74	20.12	59.86	68.30	-8.44	peak	P
2 *	5460.000	29.05	20.12	49.17	54.00	-4.83	AVG	P
3	5470.000	40.92	20.07	60.99	68.30	-7.31	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD		
Remark:			

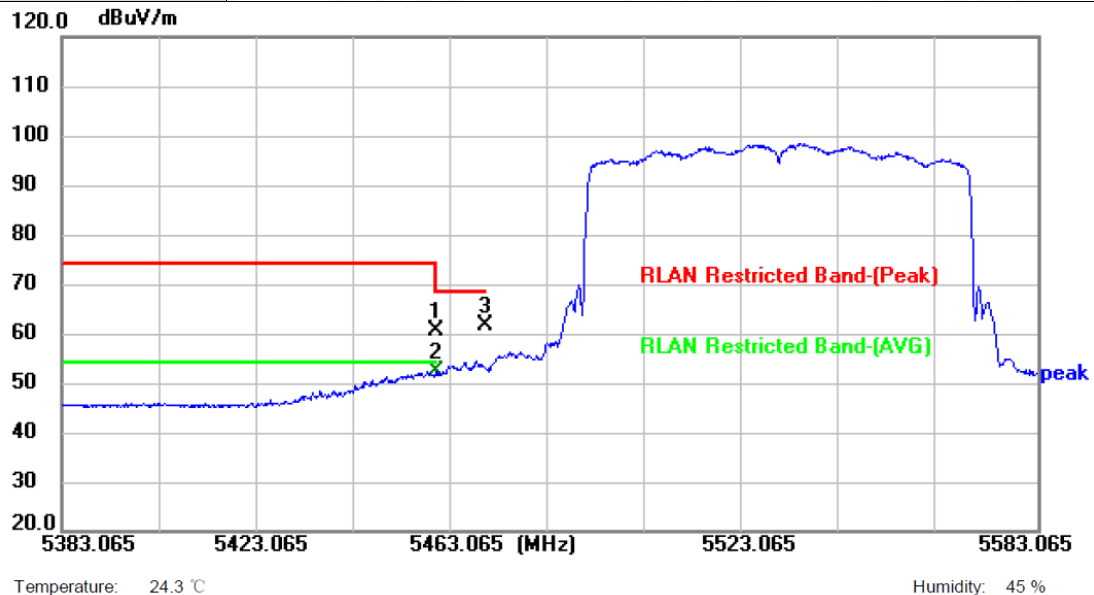


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.24	20.12	60.36	68.30	-7.94	peak	P
2 *	5460.000	32.04	20.12	52.16	54.00	-1.84	AVG	P
3	5470.000	41.48	20.07	61.55	68.30	-6.75	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD		
Remark:			

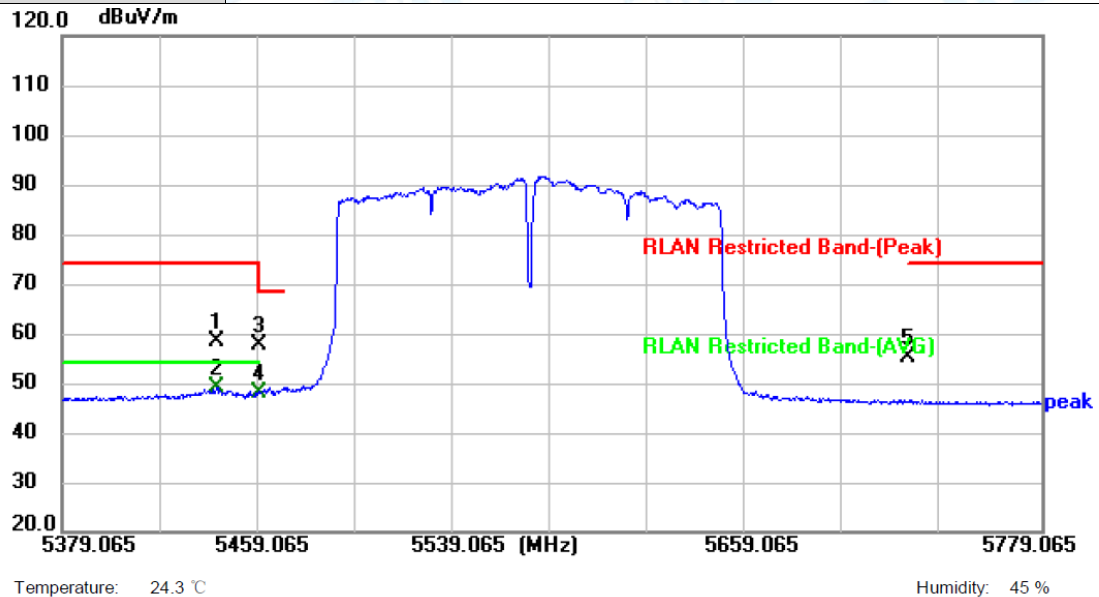

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5442.265	38.32	20.14	58.46	74.00	-15.54	peak	P
2 *	5442.265	28.93	20.14	49.07	54.00	-4.93	AVG	P
3	5460.000	37.73	20.12	57.85	68.30	-10.45	peak	P
4	5460.000	27.88	20.12	48.00	54.00	-6.00	AVG	P
5	5725.000	33.75	21.59	55.34	74.00	-18.66	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD		
Remark:			

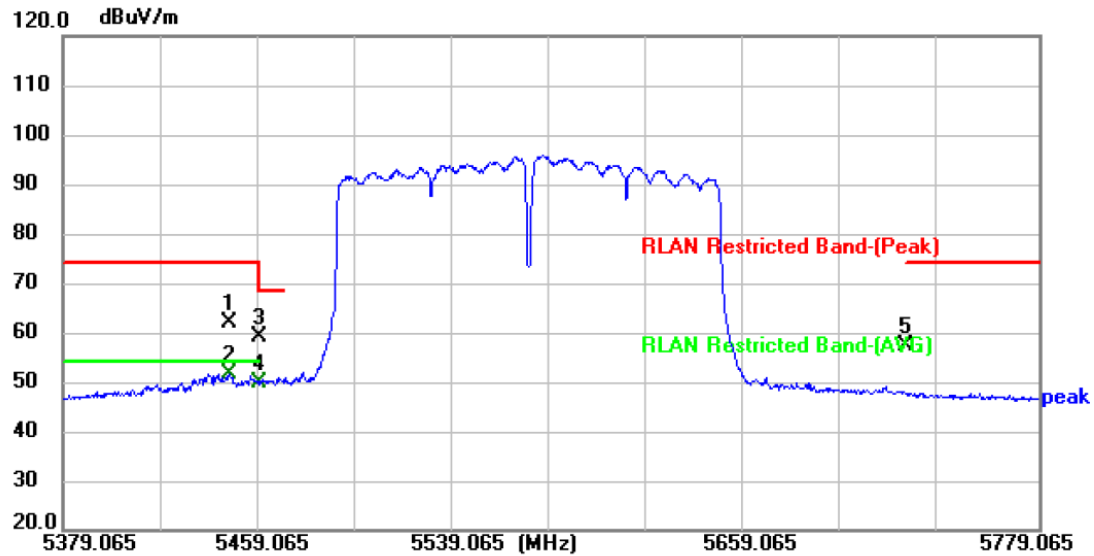

Temperature: 24.3 °C

Humidity: 45 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5447.065	41.78	20.16	61.94	74.00	-12.06	peak	P
2 *	5447.065	31.54	20.16	51.70	54.00	-2.30	AVG	P
3	5460.000	38.91	20.12	59.03	68.30	-9.27	peak	P
4	5460.000	29.61	20.12	49.73	54.00	-4.27	AVG	P
5	5725.000	35.65	21.59	57.24	74.00	-16.76	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)

3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

