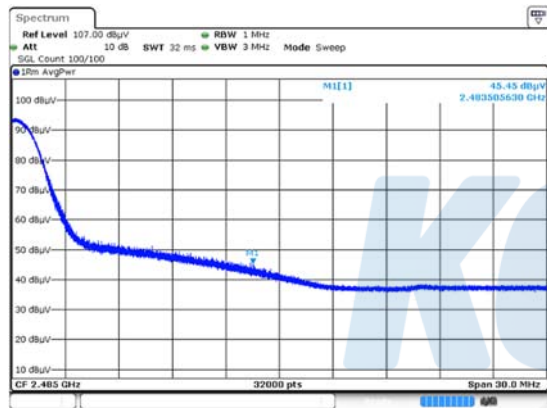
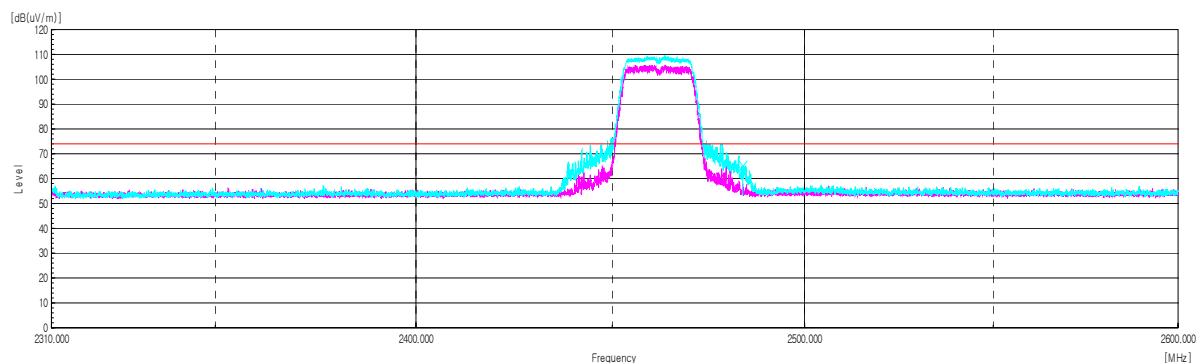


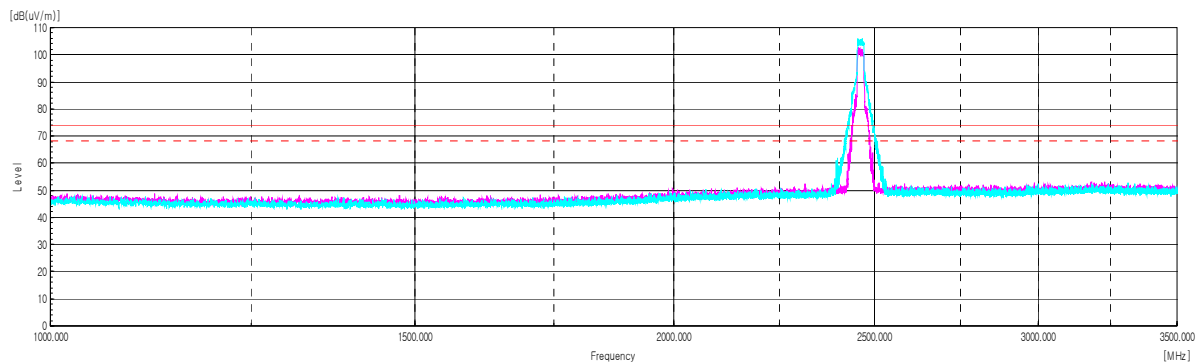
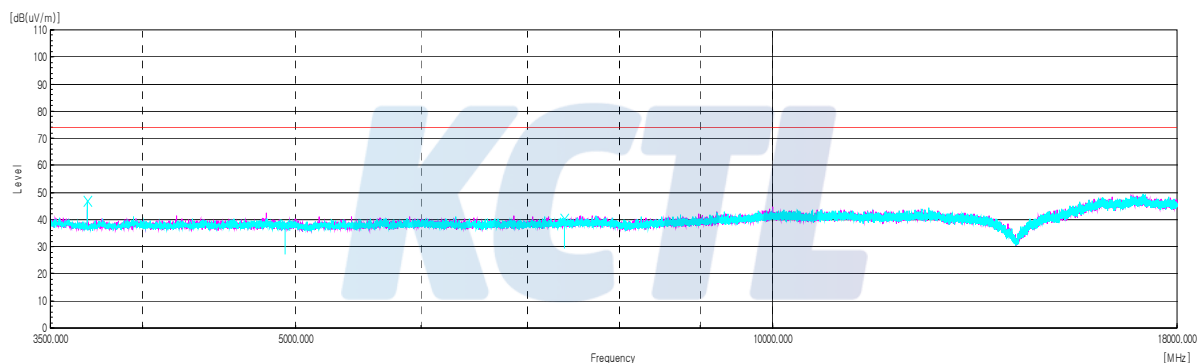
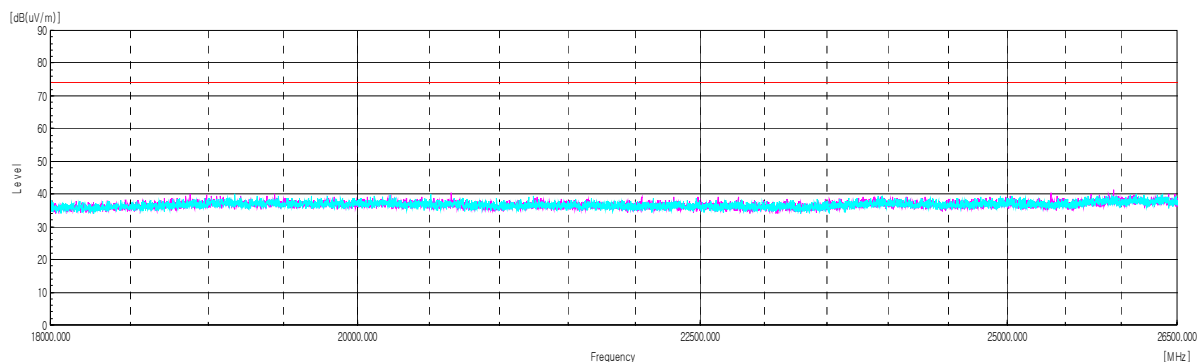
Highest Channel (2 462 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.51 ¹⁾	V	58.61	32.25	-25.46	-	65.40	74.00	8.60
3 692.54 ¹⁾	V	67.08	33.15	-53.23	-	47.00	74.00	27.00
4 925.11 ¹⁾	V	56.25	34.11	-52.06	-	38.30	74.00	35.70
7 383.80 ¹⁾	V	54.96	35.68	-50.24	-	40.40	74.00	33.60
Average Data								
2 483.51 ¹⁾	V	45.45	32.25	-25.46	0.22	52.46	54.00	1.54

Average data (2 483.51 MHz)

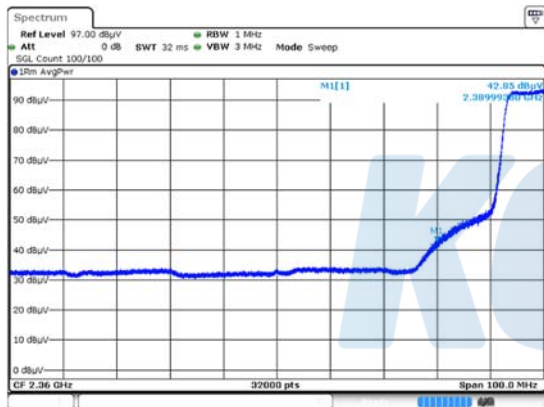
Blank

Horizontal/Vertical for Band-edge

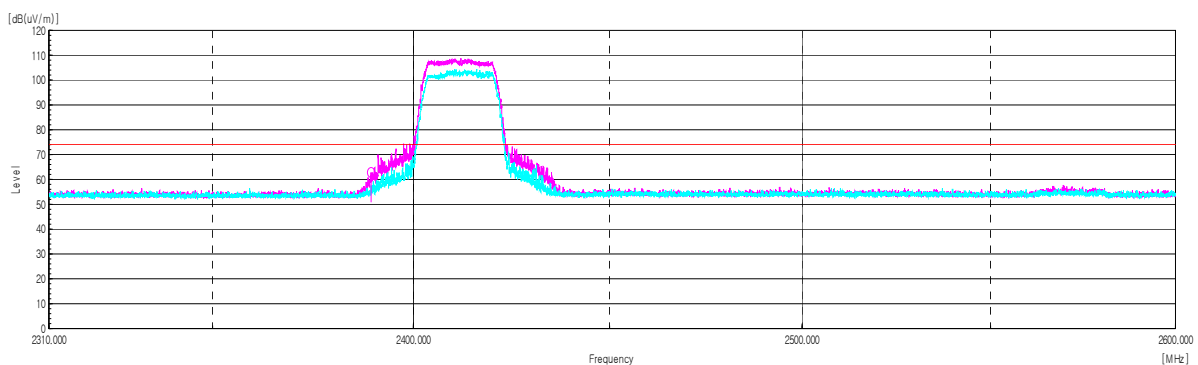
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

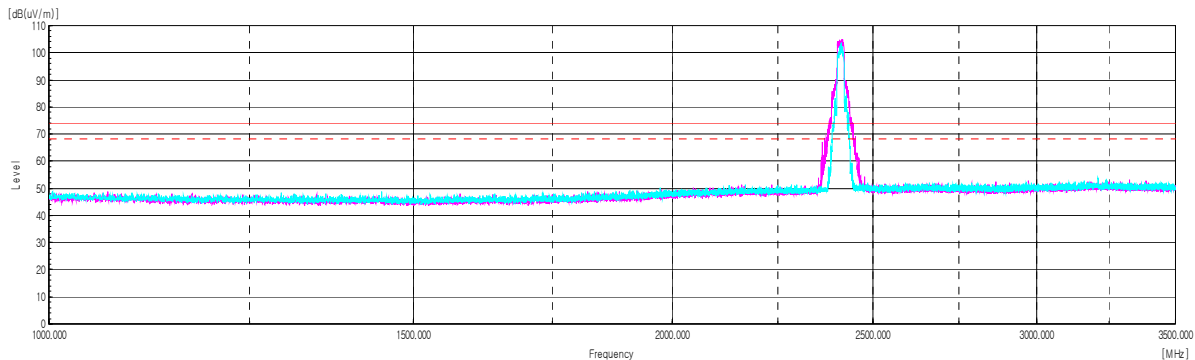
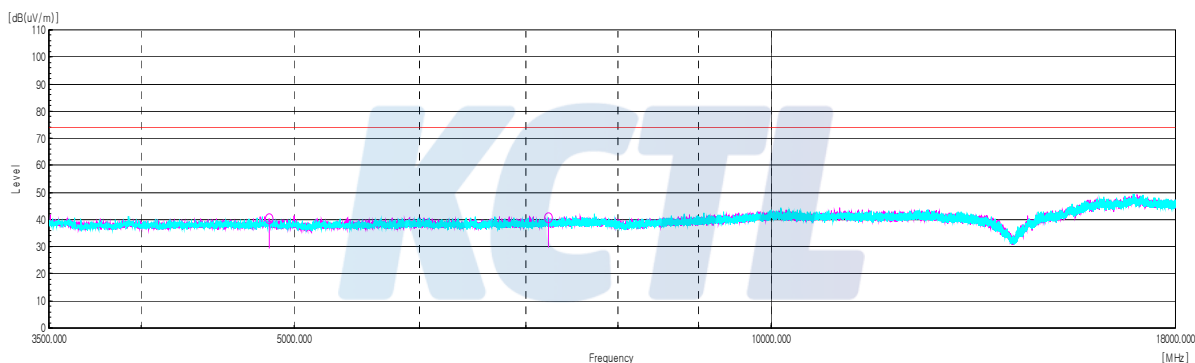
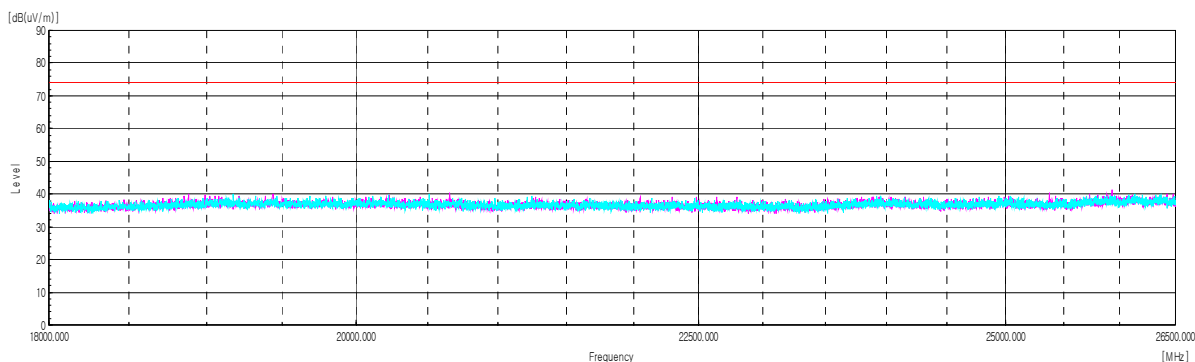
802.11n HT20 ANT 1**Lowest Channel (2 412 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.99 ¹⁾	H	56.48	31.97	-25.55	-	62.90	74.00	11.10
4 821.19 ¹⁾	H	58.01	34.14	-51.95	-	40.20	74.00	33.80
7 235.57	H	55.66	35.65	-50.51	-	40.80	74.00	33.20
Average Data								
2 389.99 ¹⁾	H	42.85	31.97	-25.55	0.22	49.49	54.00	4.51

Average data (2 389.99 MHz)

Blank

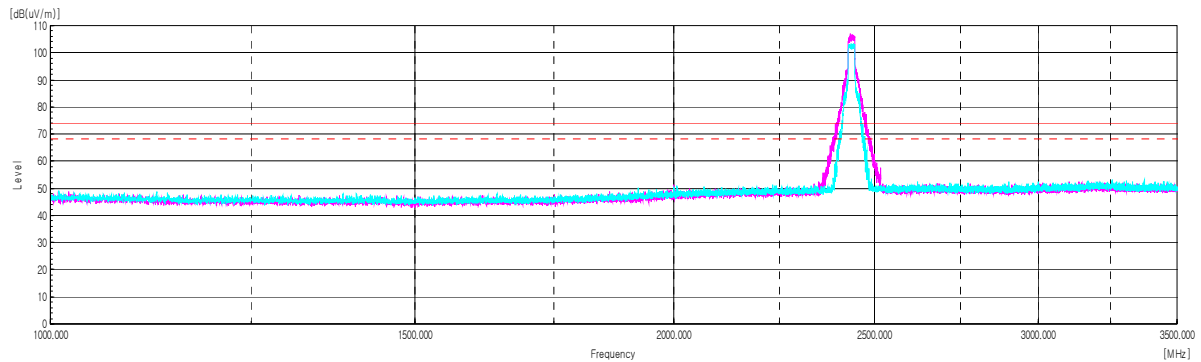
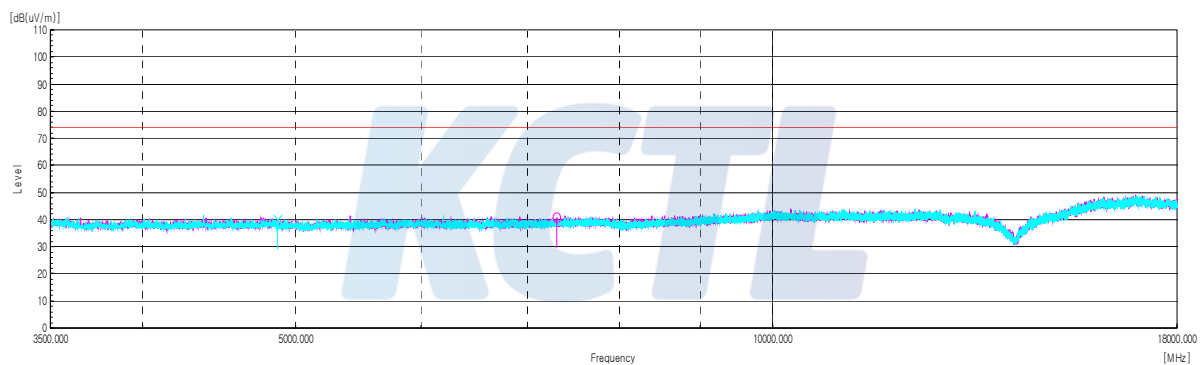
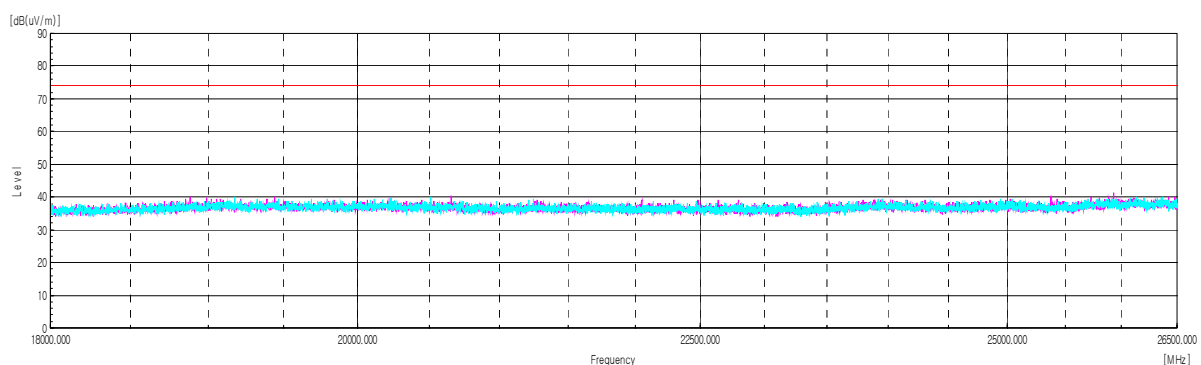
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

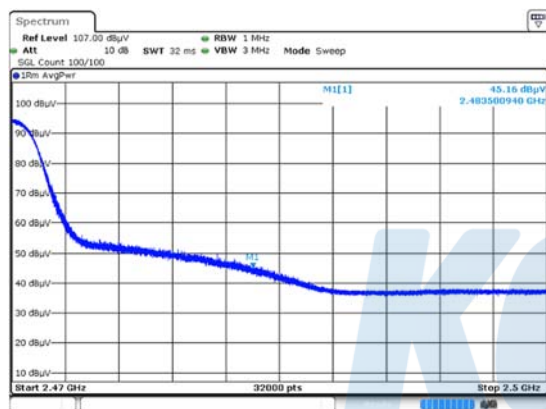
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 868.71 ¹⁾	V	57.66	34.13	-51.99	-	39.80	74.00	34.20
7 307.27 ¹⁾	H	55.22	35.66	-50.38	-	40.50	74.00	33.50
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



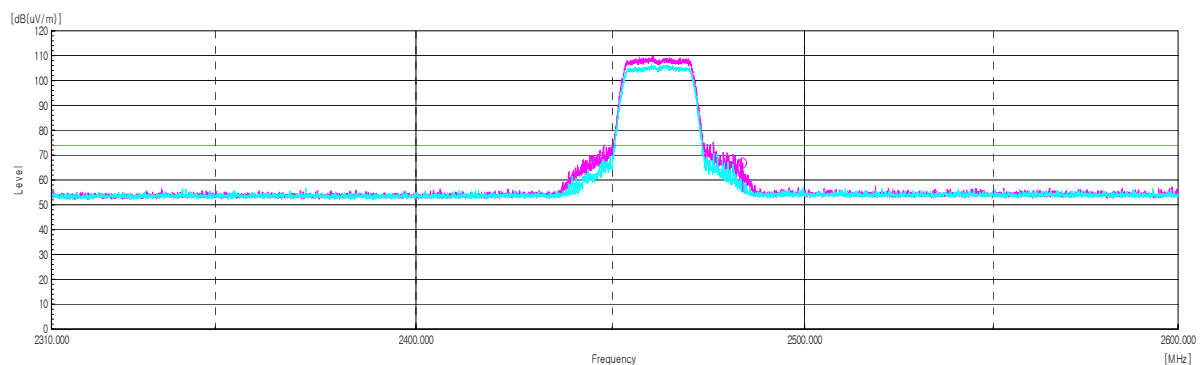
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

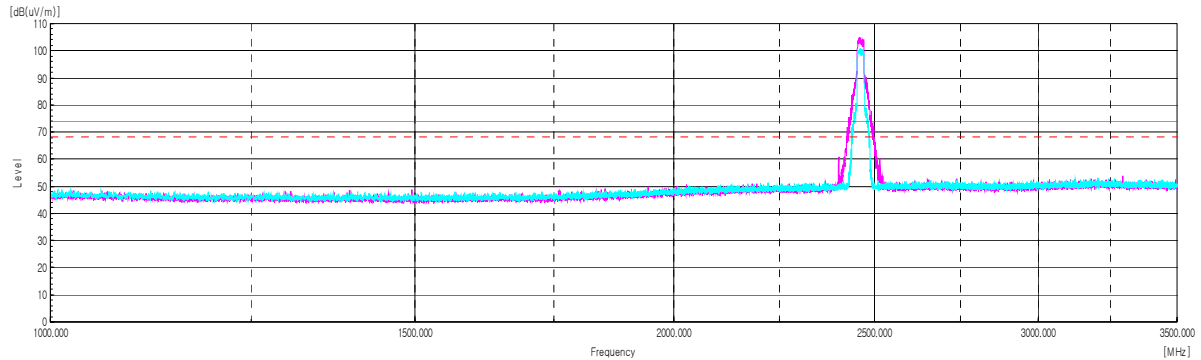
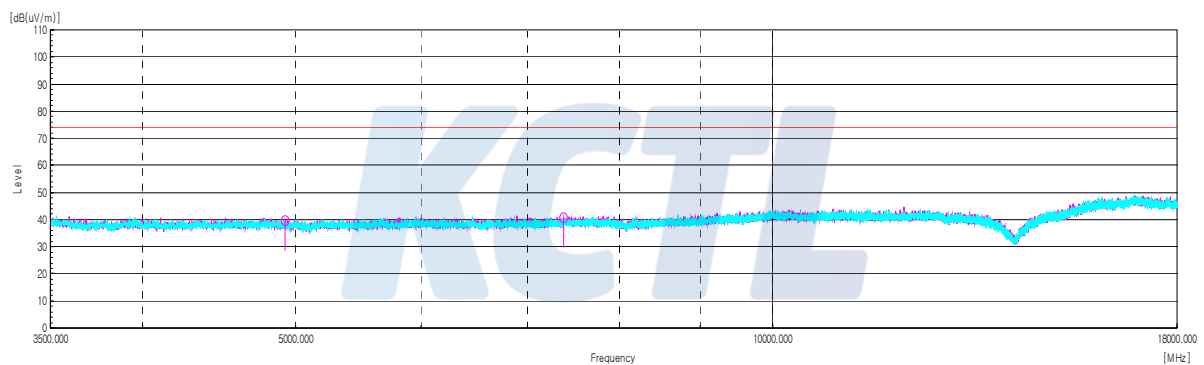
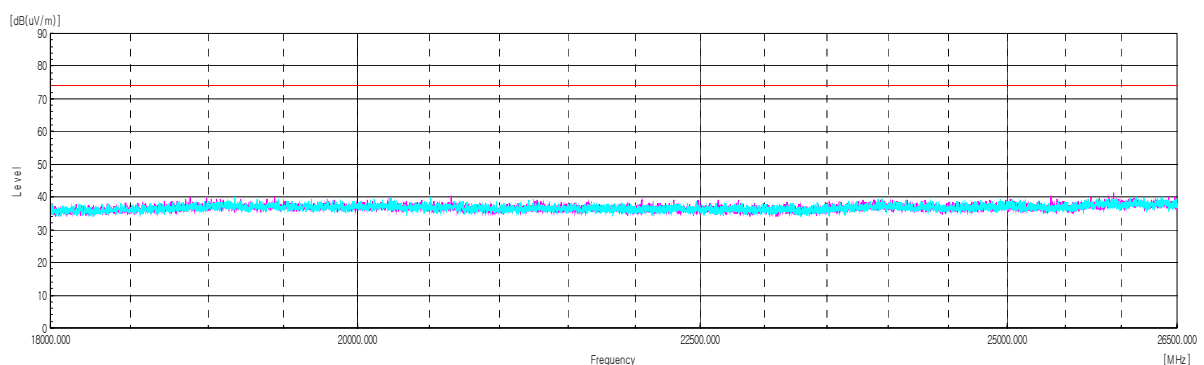
Highest Channel (2 462 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.75 ¹⁾	H	59.91	32.25	-25.46	-	66.70	74.00	7.30
4 922.69 ¹⁾	H	57.73	34.12	-52.05	-	39.80	74.00	34.20
7 382.19 ¹⁾	H	55.36	35.68	-50.24	-	40.80	74.00	33.20
Average Data								
2 483.75 ¹⁾	H	45.16	32.25	-25.46	0.22	52.17	54.00	1.83

Average data (2 483.75 MHz)

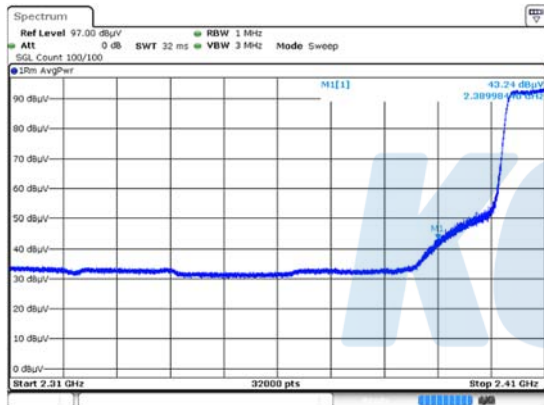
Blank

Horizontal/Vertical for Band-edge

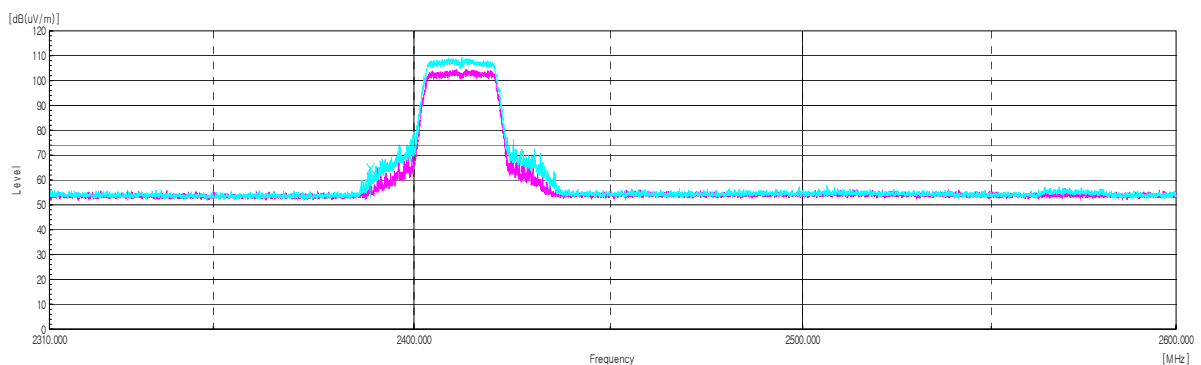
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

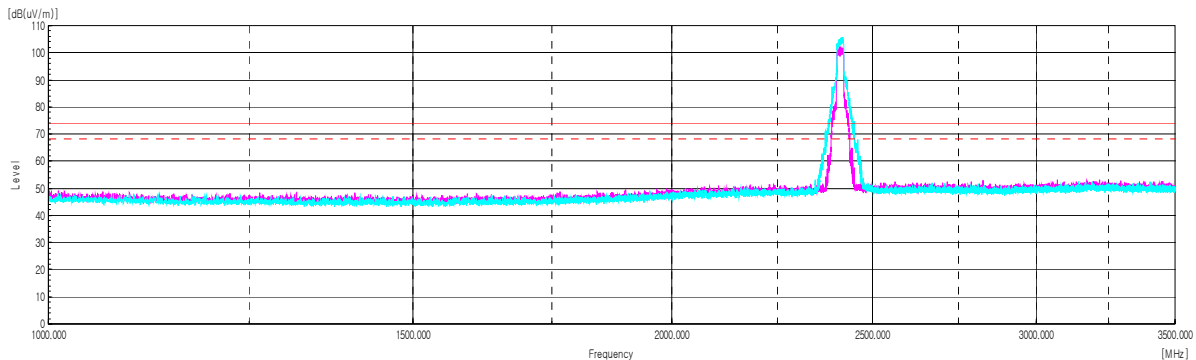
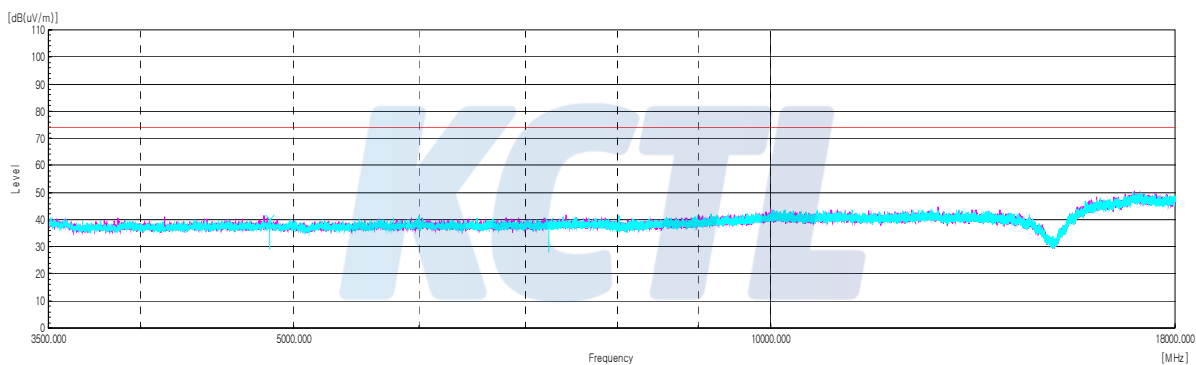
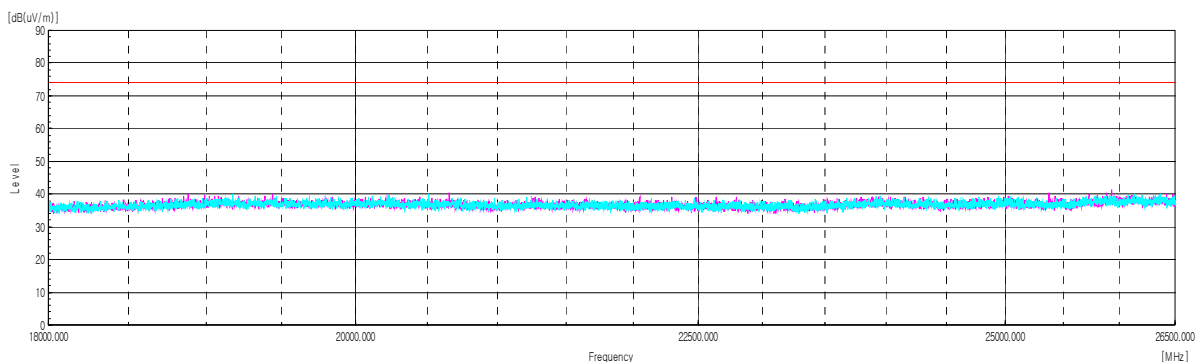
802.11n HT20 ANT 2**Lowest Channel (2 412 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.98 ¹⁾	V	58.58	31.97	-25.55	-	65.00	74.00	9.00
4 824.41 ¹⁾	V	57.61	34.14	-51.95	-	39.80	74.00	34.20
7 240.40	V	53.75	35.65	-50.50	-	38.90	74.00	35.10
Average Data								
2 389.98 ¹⁾	V	43.24	31.97	-25.55	0.22	49.88	54.00	4.12

Average data (2 389.98 MHz)

Blank

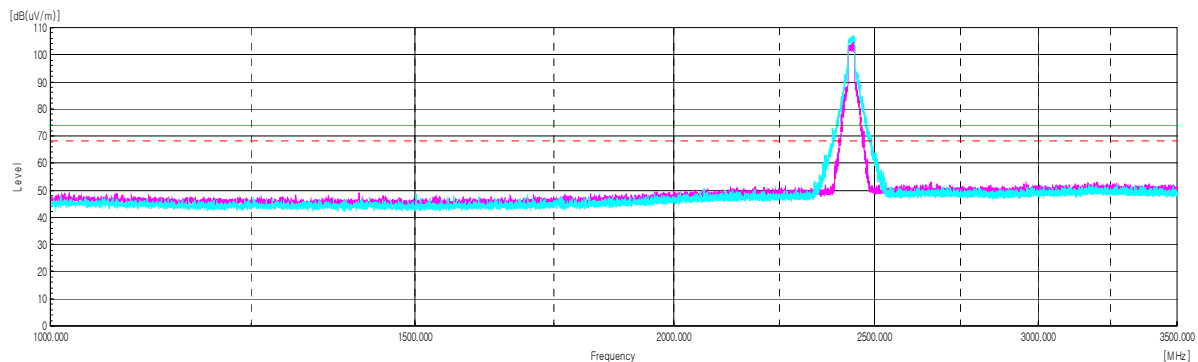
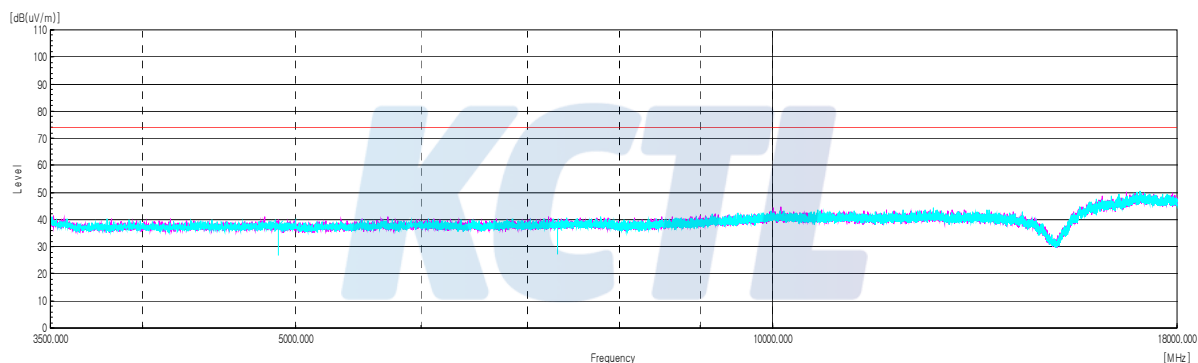
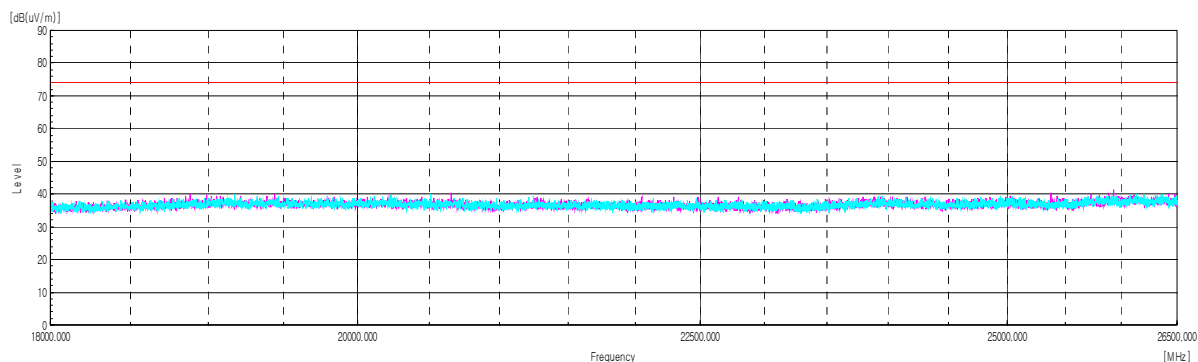
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

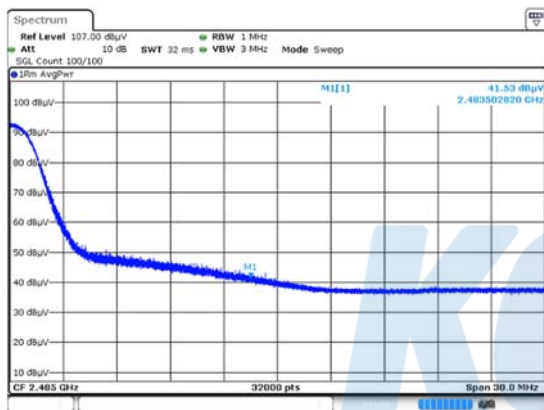
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 874.35 ¹⁾	V	55.77	34.13	-52.00	-	37.90	74.00	36.10
7 312.10 ¹⁾	V	53.01	35.66	-50.37	-	38.30	74.00	35.70
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



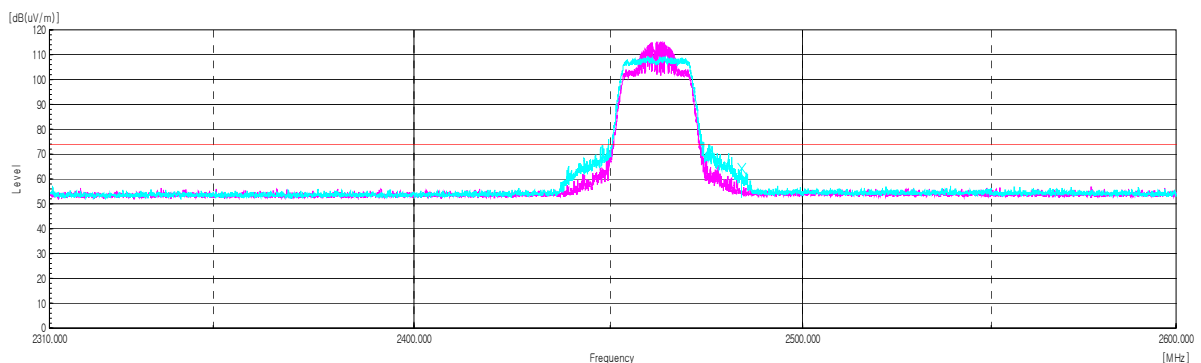
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

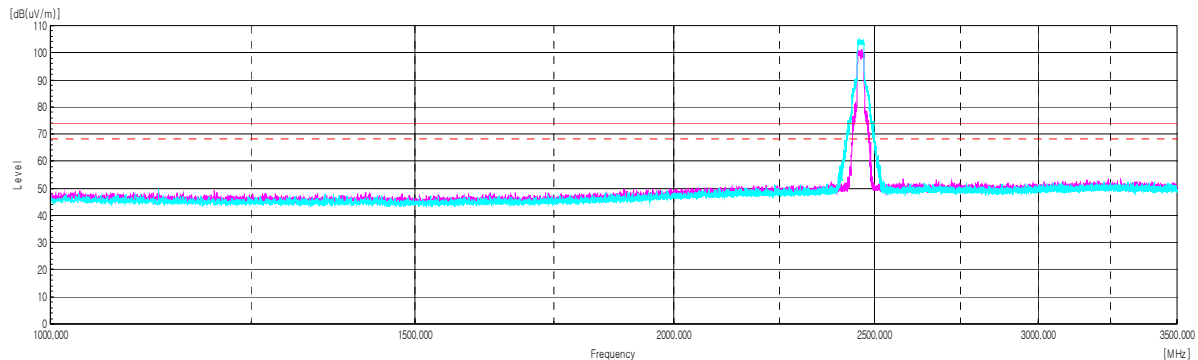
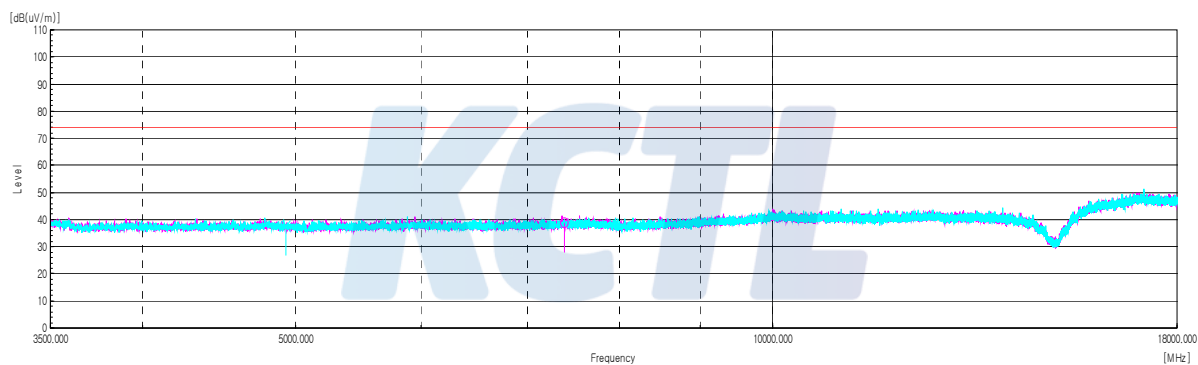
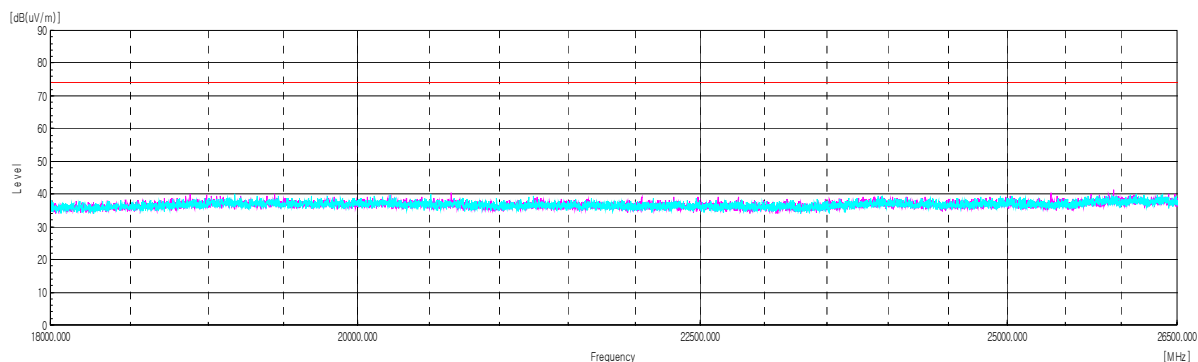
Highest Channel (2 462 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.50 ¹⁾	V	57.81	32.25	-25.46	-	64.60	74.00	9.40
4 926.72 ¹⁾	V	55.65	34.11	-52.06	-	37.70	74.00	36.30
7 387.02 ¹⁾	H	53.36	35.68	-50.24	-	38.80	74.00	35.20
Average Data								
2 483.50 ¹⁾	V	41.53	32.25	-25.46	0.22	48.54	54.00	5.46

Average data (2 483.50 MHz)

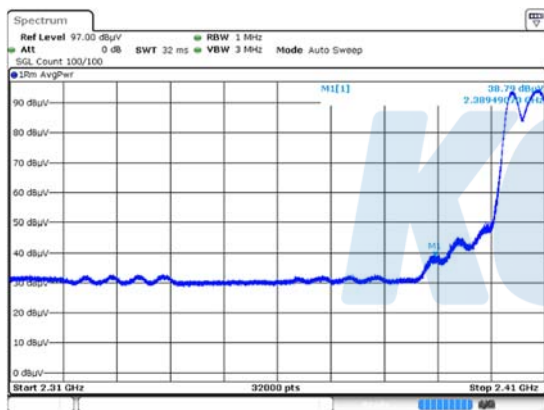
Blank

Horizontal/Vertical for Band-edge

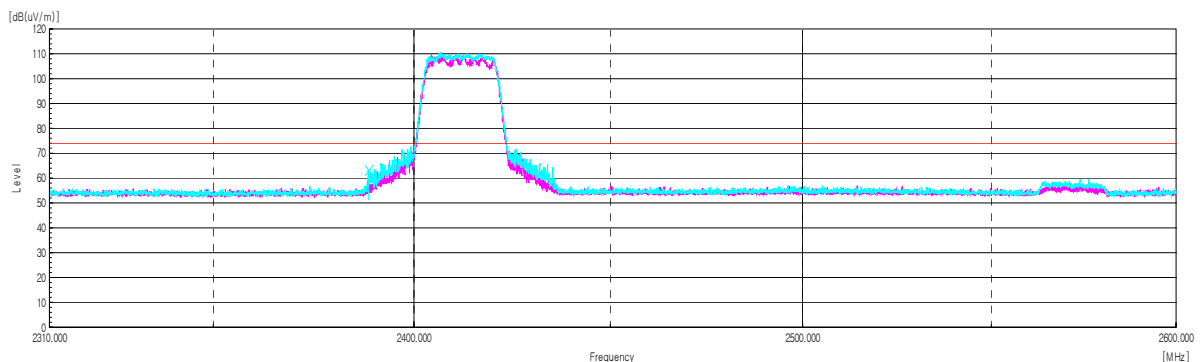
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

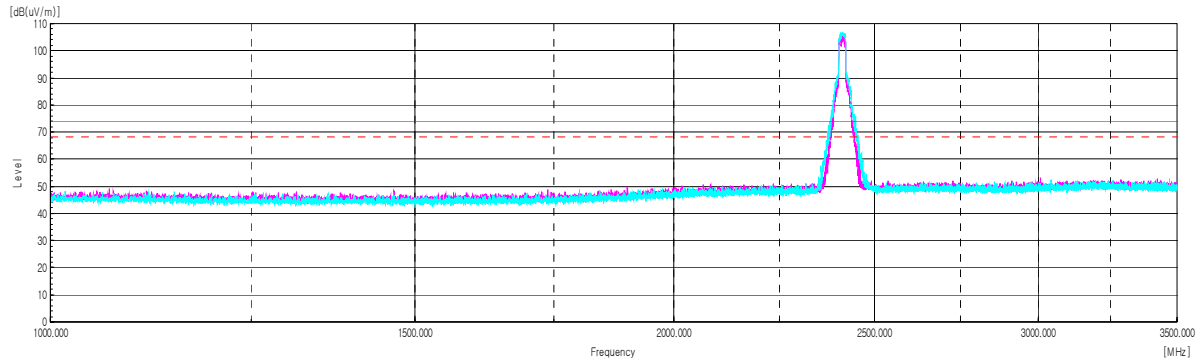
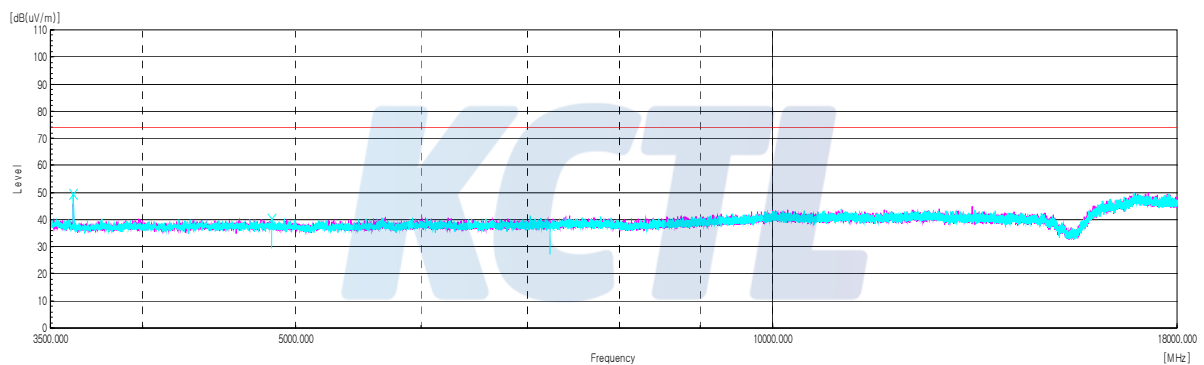
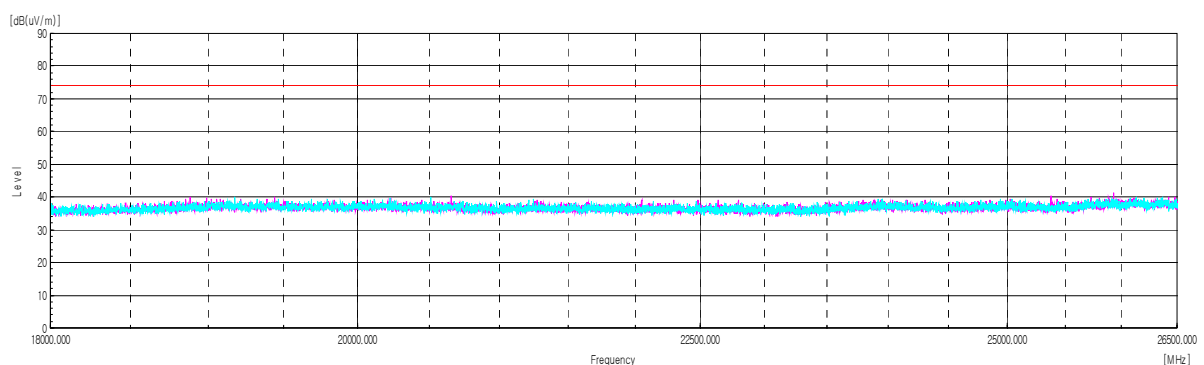
802.11n HT20 3TX MIMO**Lowest Channel (2 412 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 489.49 ¹⁾	V	56.49	32.27	-25.46	-	63.30	74.00	10.70
3 617.62 ¹⁾	V	69.91	33.09	-53.50	-	49.50	74.00	24.50
4 826.02 ¹⁾	V	58.02	34.13	-51.95	-	40.20	74.00	33.80
7 233.96	V	53.06	35.65	-50.51	-	38.20	74.00	35.80
Average Data								
2 489.49 ¹⁾	V	38.79	32.27	-25.46	0.22	45.82	54.00	8.18

Average data (2 489.49 MHz)

Blank

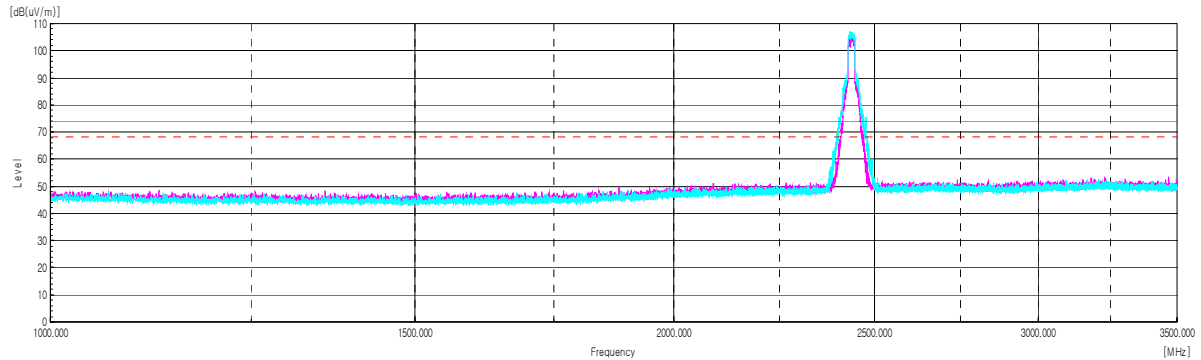
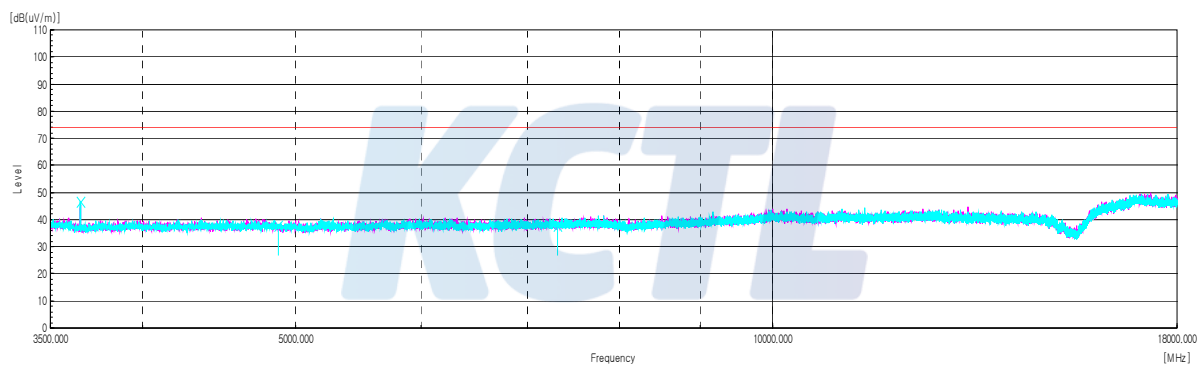
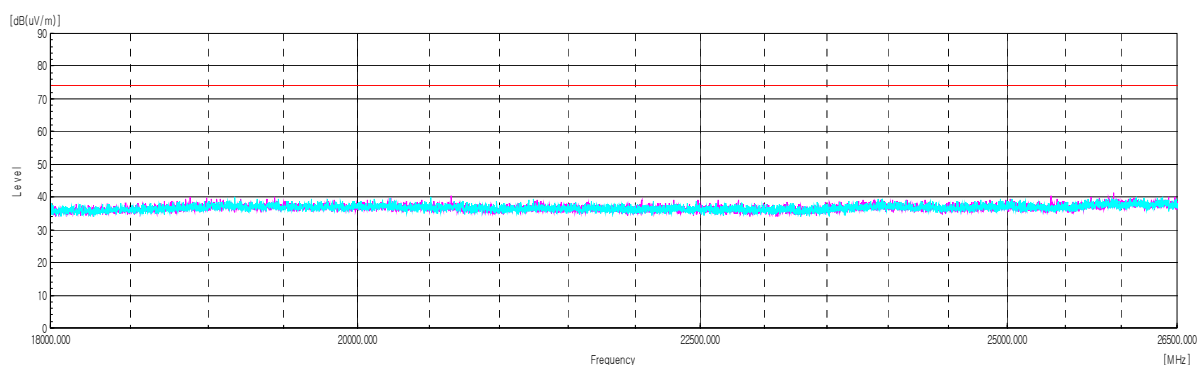
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

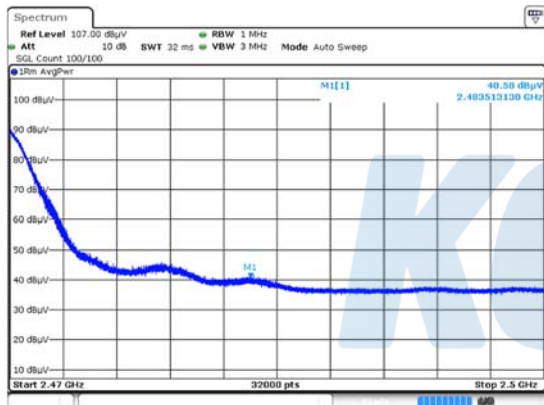
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
3 655.48 ¹⁾	V	66.74	33.12	-53.36	-	46.50	74.00	27.50
4 876.77 ¹⁾	V	55.58	34.12	-52.00	-	37.70	74.00	36.30
7 311.29 ¹⁾	V	52.61	35.66	-50.37	-	37.90	74.00	36.10
Average Data								
No spurious emissions were detected within 20 dB of the limit								



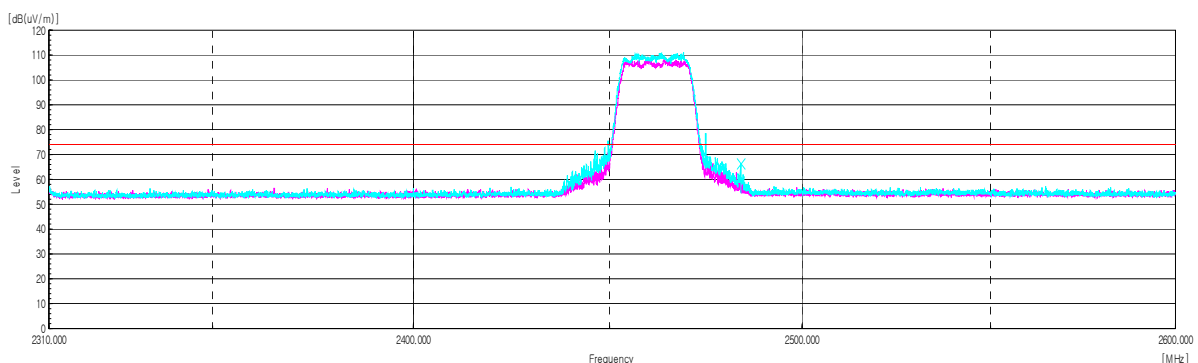
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

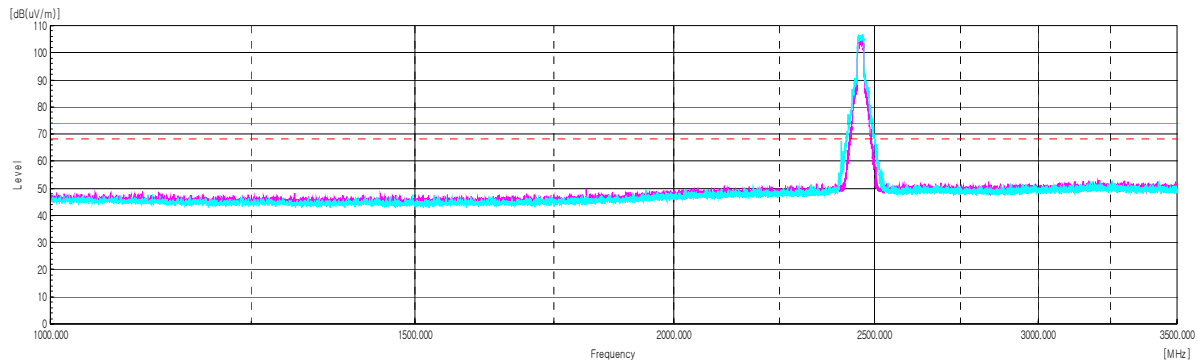
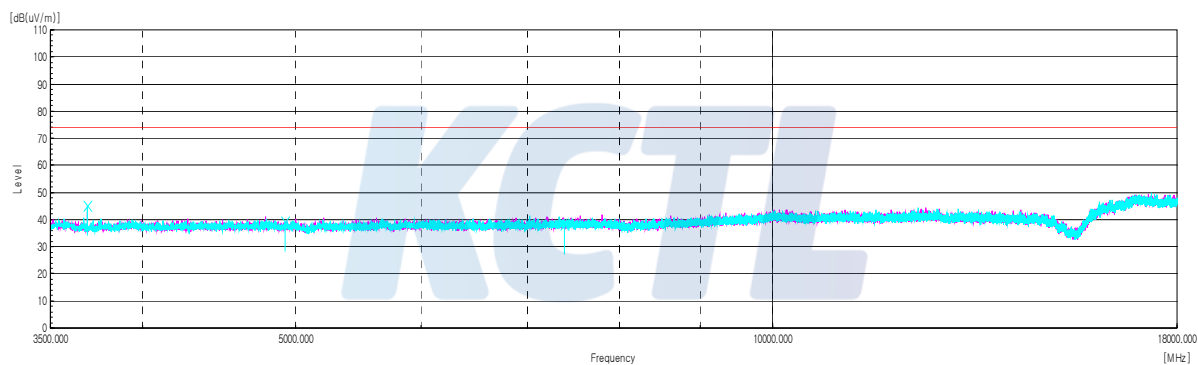
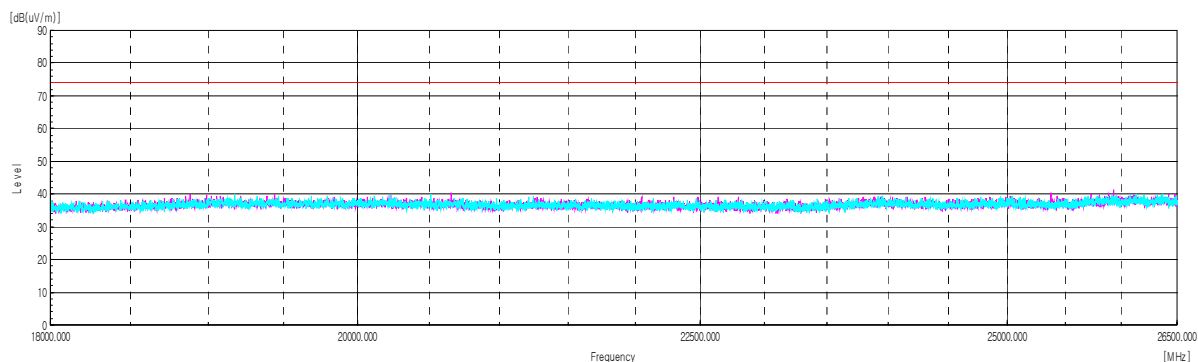
Highest Channel (2 462 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.51 ¹⁾	V	59.71	32.25	-25.46	-	66.50	74.00	7.50
3 692.54 ¹⁾	V	65.28	33.15	-53.23	-	45.20	74.00	28.80
4 924.30 ¹⁾	V	57.34	34.12	-52.06	-	39.40	74.00	34.60
7 386.22 ¹⁾	V	52.76	35.68	-50.24	-	38.20	74.00	35.80
Average Data								
2 483.51 ¹⁾	V	40.58	32.25	-25.46	0.22	47.59	54.00	6.41

Average data (2 483.51 MHz)

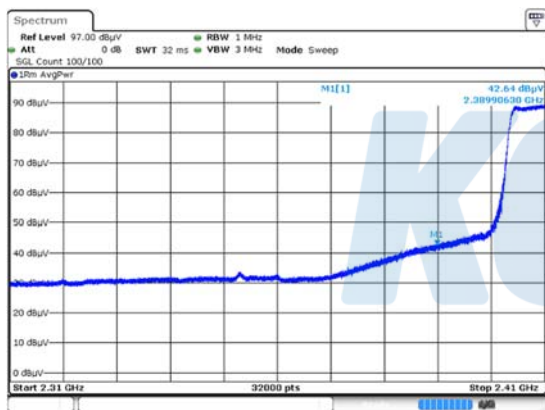
Blank

Horizontal/Vertical for Band-edge

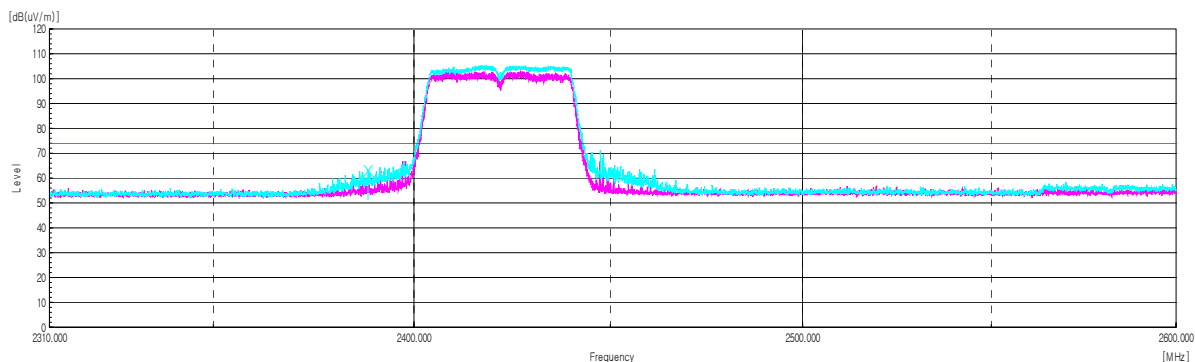
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

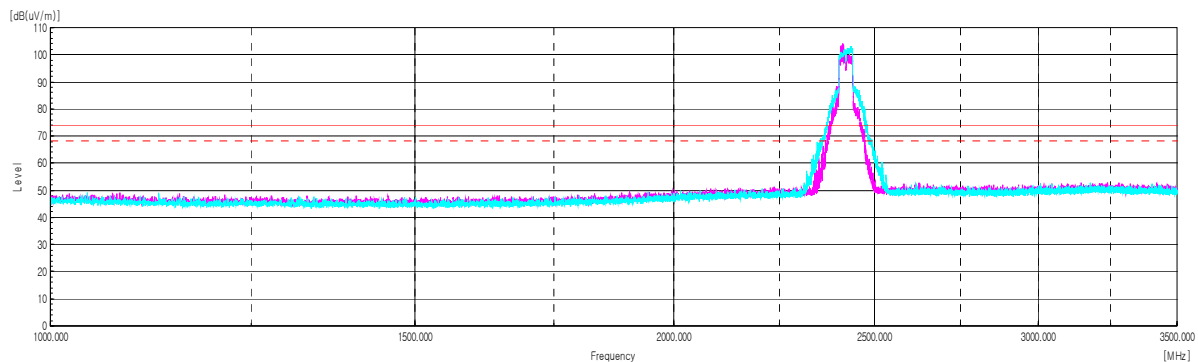
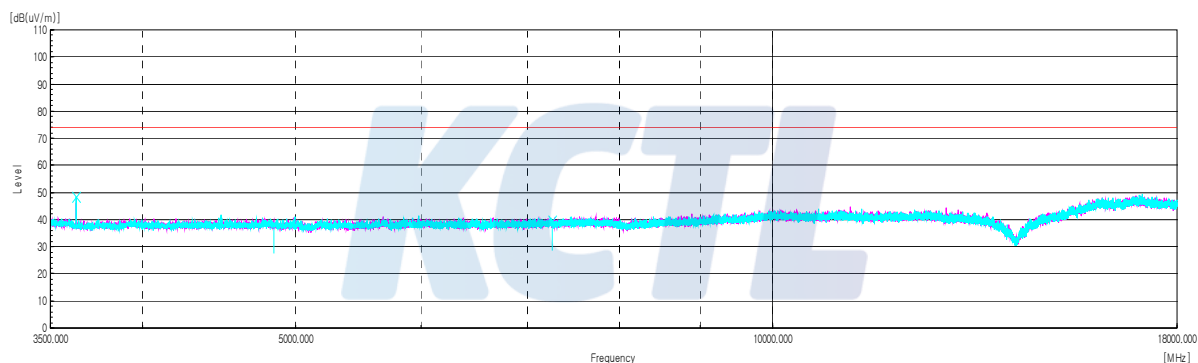
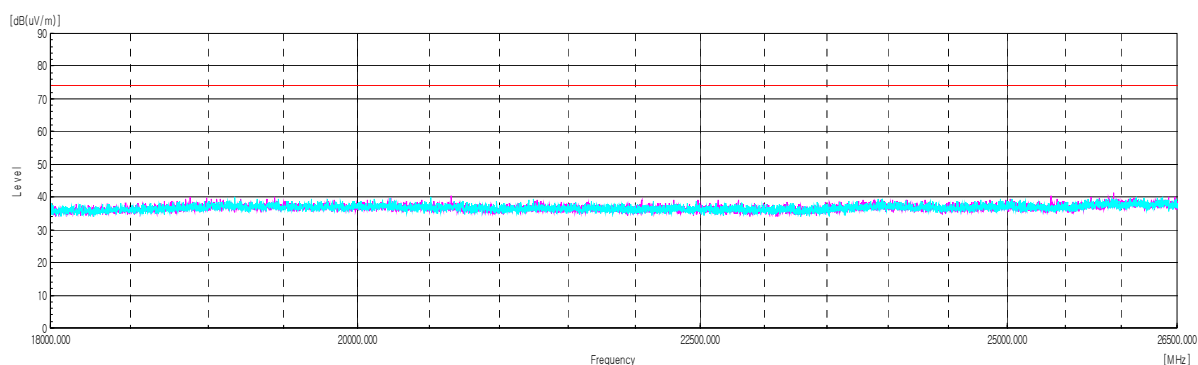
802.11n HT40 ANT 0**Lowest Channel (2 422 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.91 ¹⁾	V	56.68	31.97	-25.55	-	63.10	74.00	10.90
3 632.92 ¹⁾	V	68.73	33.11	-53.44	-	48.40	74.00	25.60
4 844.55 ¹⁾	V	56.24	34.13	-51.97	-	38.40	74.00	35.60
7 262.15 ¹⁾	V	54.41	35.65	-50.46	-	39.60	74.00	34.40
Average Data								
2 389.91 ¹⁾	V	42.64	31.97	-25.55	0.43	49.49	54.00	4.51

Average data (2 389.91 MHz)

Blank

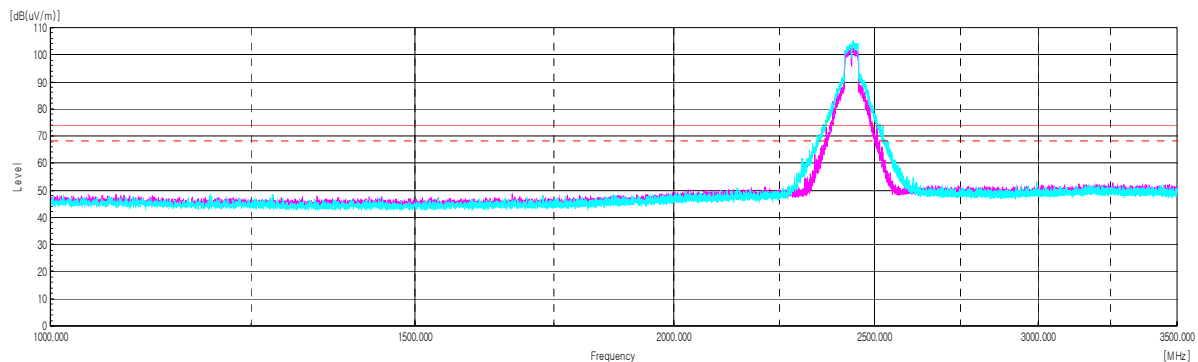
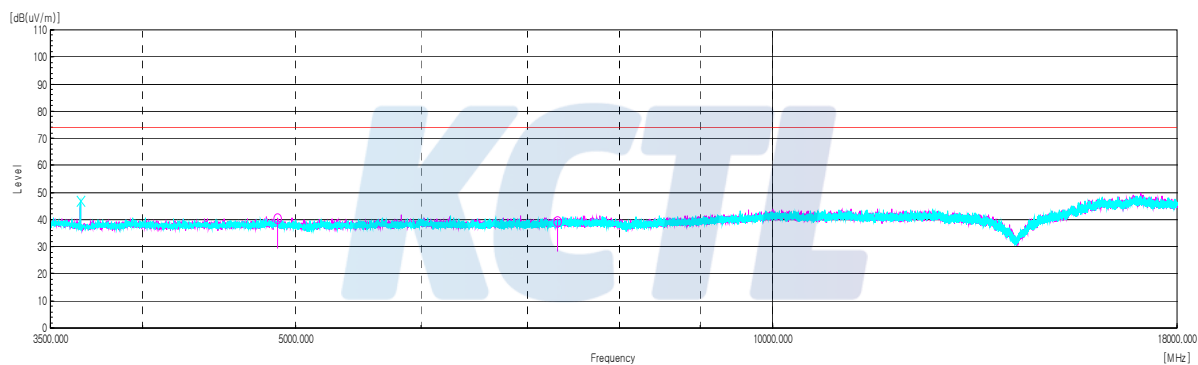
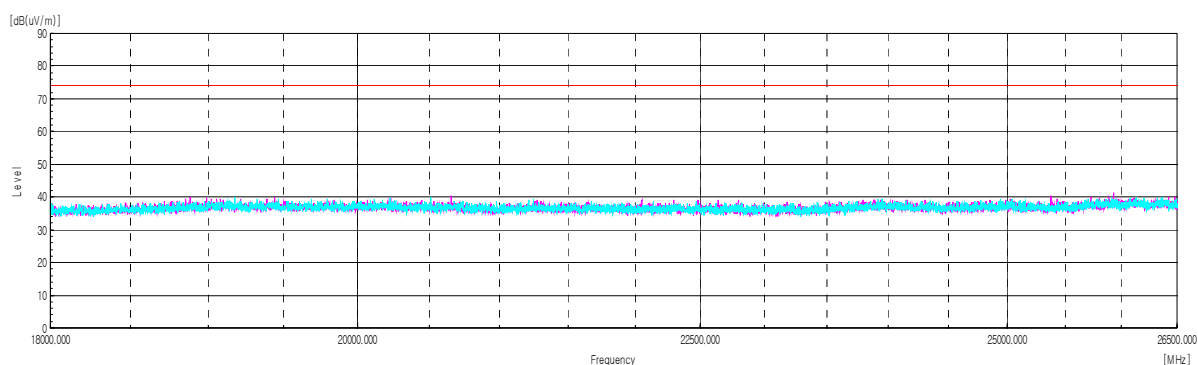
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

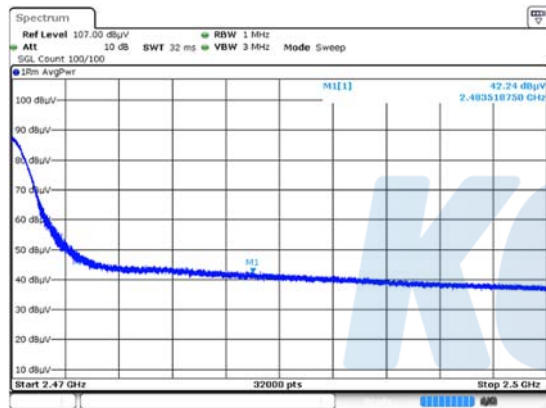
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
3 655.48 ¹⁾	V	67.24	33.12	-53.36	-	47.00	74.00	27.00
4 871.13 ¹⁾	H	58.26	34.13	-51.99	-	40.40	74.00	33.60
7 311.29 ¹⁾	H	54.01	35.66	-50.37	-	39.30	74.00	34.70
Average Data								
No spurious emissions were detected within 20 dB of the limit								

KCTL

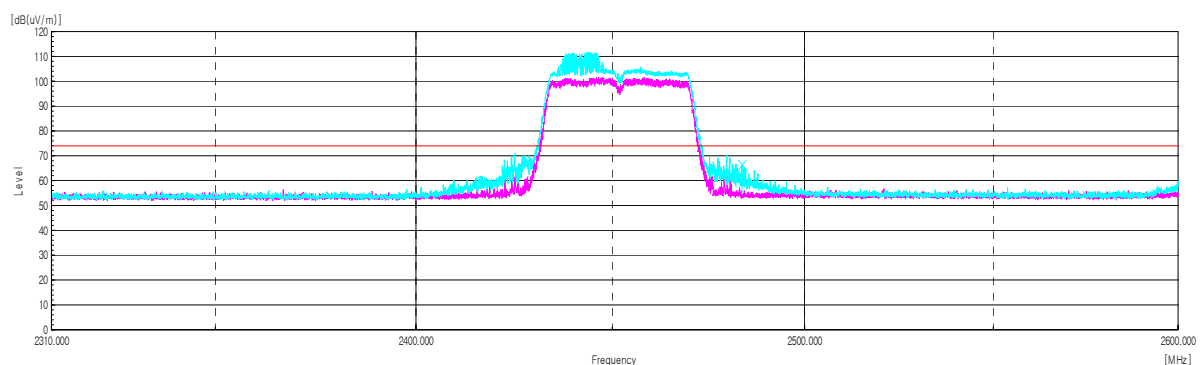
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

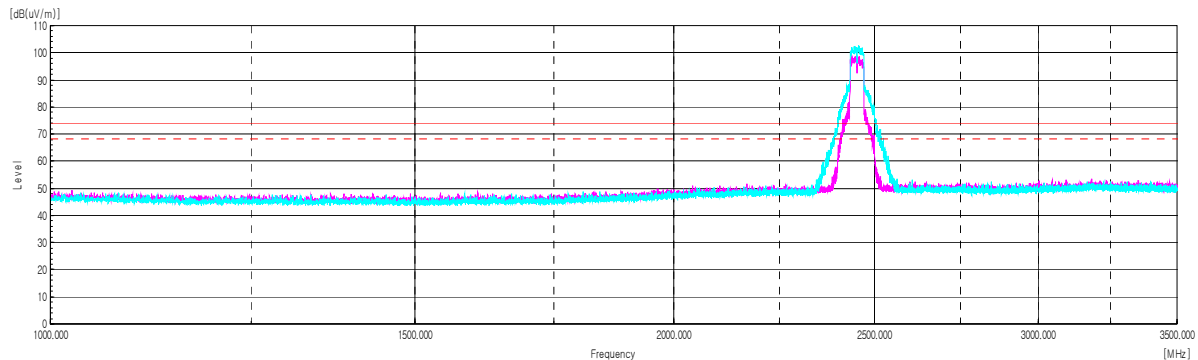
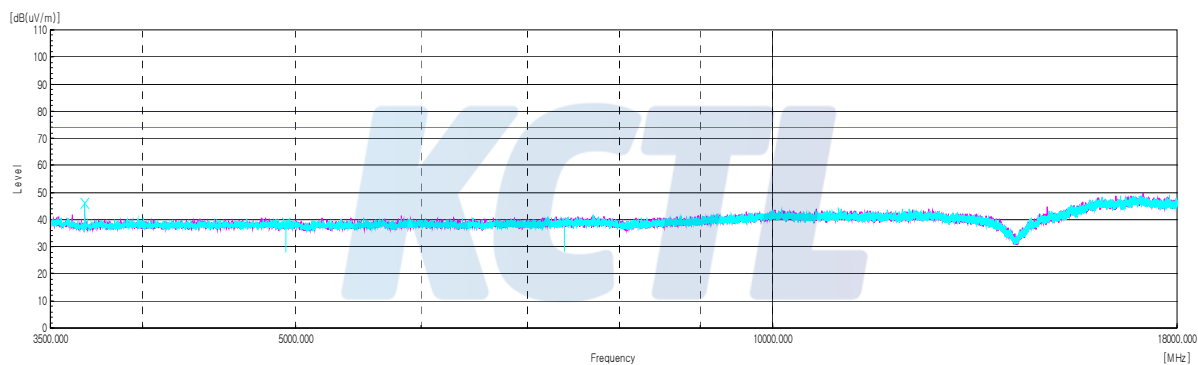
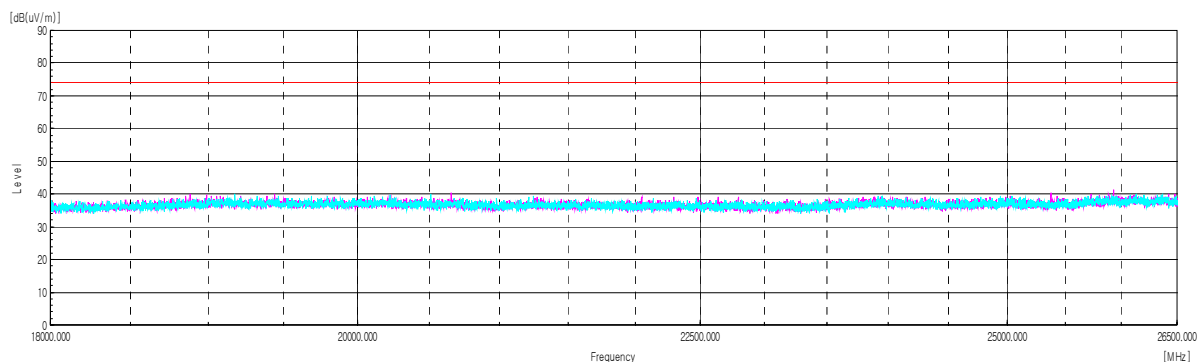
Highest Channel (2 452 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.52 ¹⁾	V	59.51	32.25	-25.46	-	66.30	74.00	7.70
3 678.04 ¹⁾	V	66.34	33.14	-53.28	-	46.20	74.00	27.80
4 925.91 ¹⁾	V	56.65	34.11	-52.06	-	38.70	74.00	35.30
7 387.83 ¹⁾	V	53.75	35.68	-50.23	-	39.20	74.00	34.80
Average Data								
2 483.52 ¹⁾	V	42.24	32.25	-25.46	0.43	49.46	54.00	4.54

Average data (2 483.52 MHz)

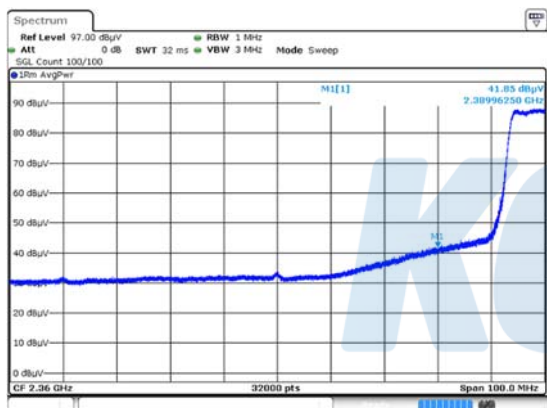
Blank

Horizontal/Vertical for Band-edge

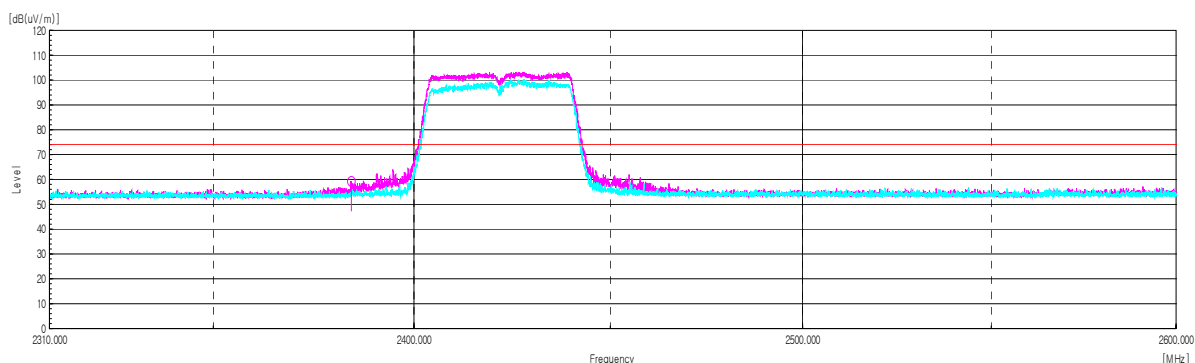
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

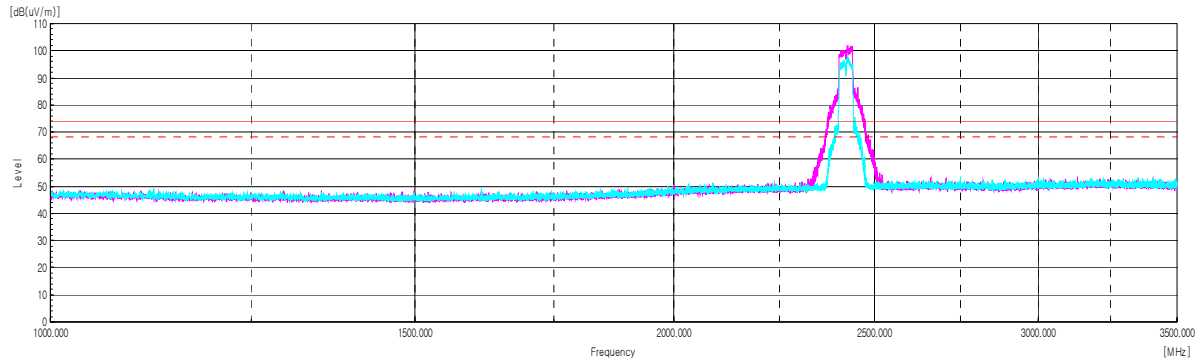
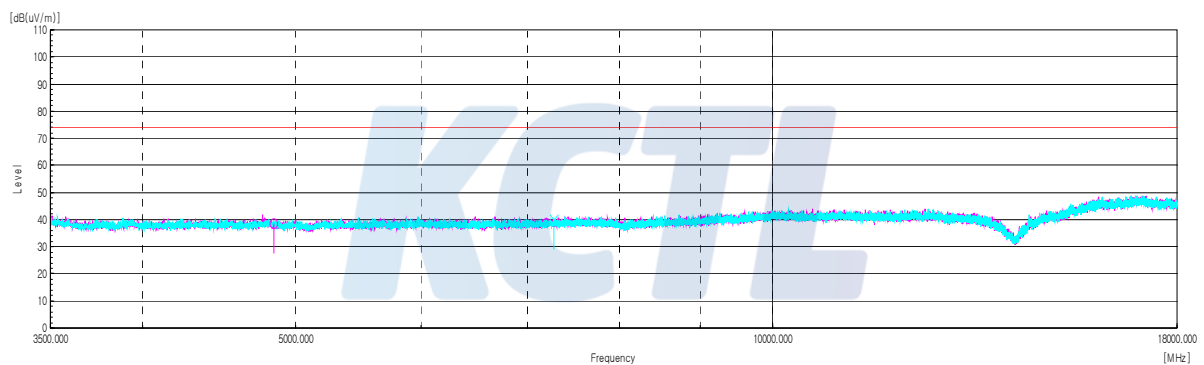
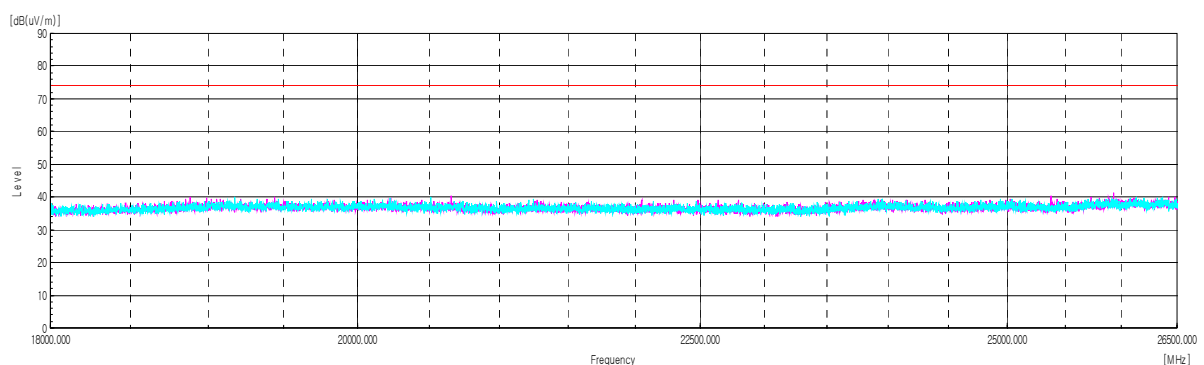
802.11n HT40 ANT 1**Lowest Channel (2 422 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.96 ¹⁾	H	52.88	31.97	-25.55	-	59.30	74.00	14.70
4 842.94 ¹⁾	H	56.44	34.13	-51.97	-	38.60	74.00	35.40
7 271.82 ¹⁾	V	54.60	35.65	-50.45	-	39.80	74.00	34.20
Average Data								
2 389.96 ¹⁾	H	41.85	31.97	-25.55	0.43	48.70	54.00	5.30

Average data (2 389.96 MHz)

Blank

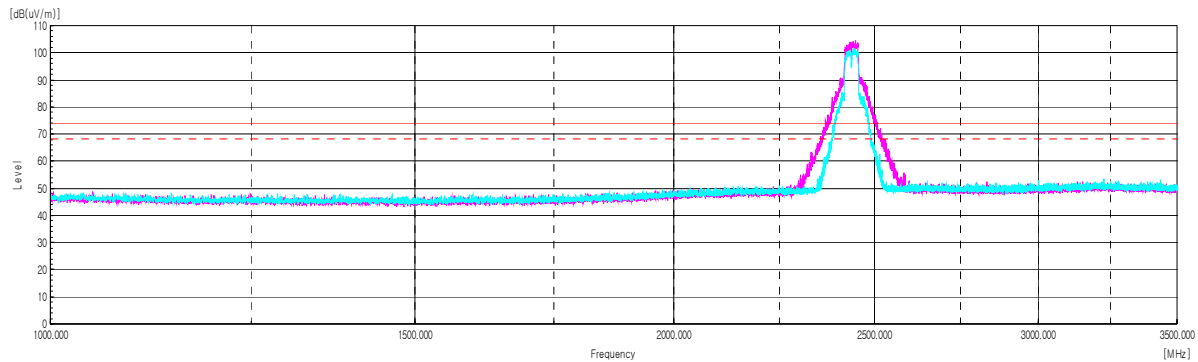
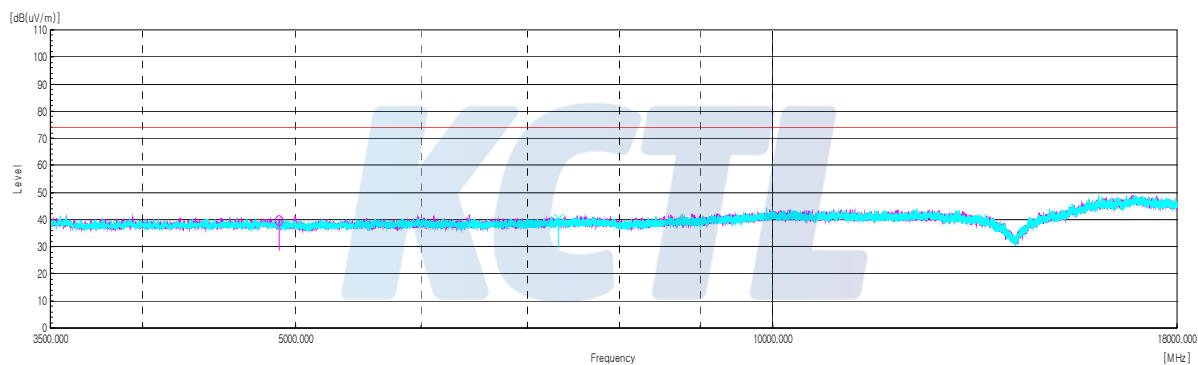
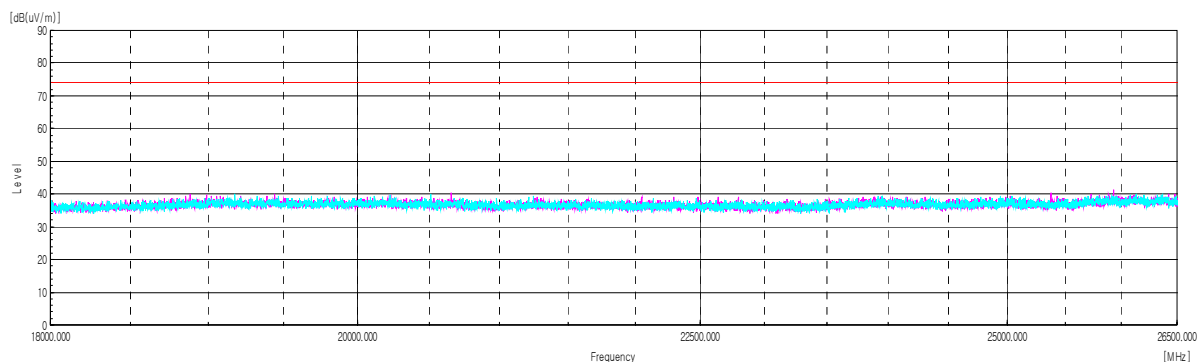
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

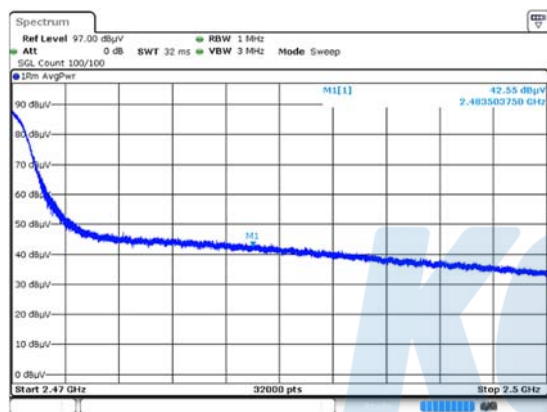
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 877.58 ¹⁾	H	57.58	34.12	-52.00	-	39.70	74.00	34.30
7 319.35 ¹⁾	V	55.20	35.66	-50.36	-	40.50	74.00	33.50
Average Data								
No spurious emissions were detected within 20 dB of the limit								



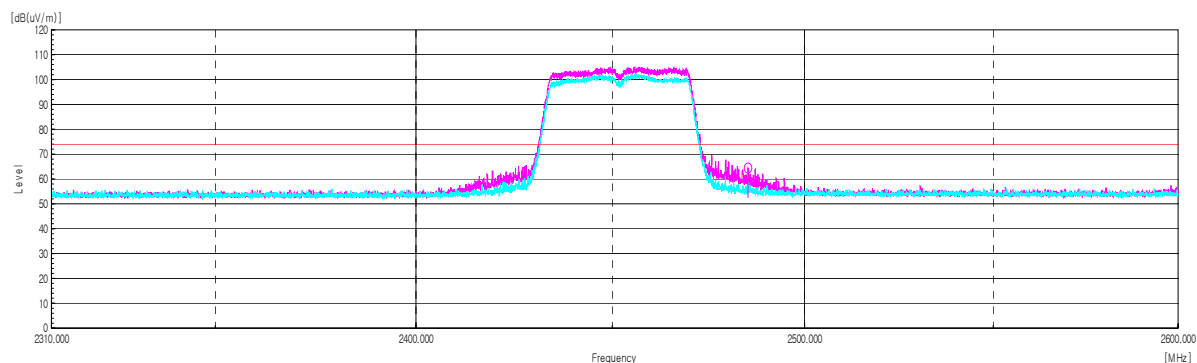
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

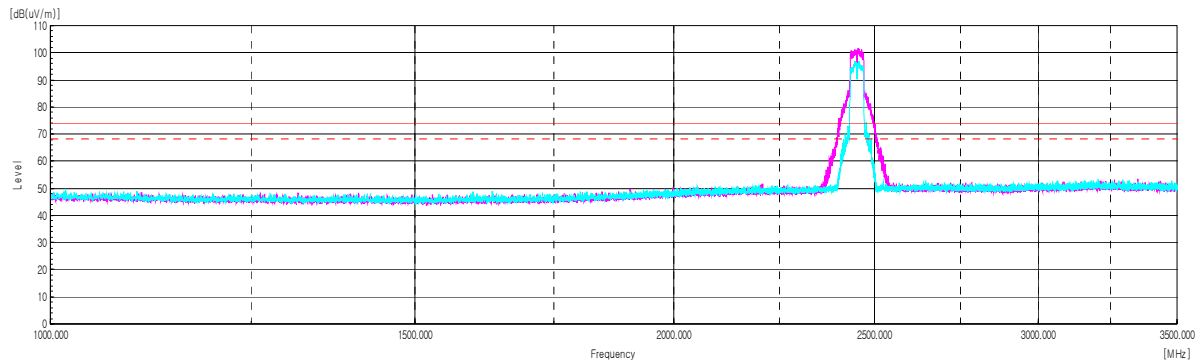
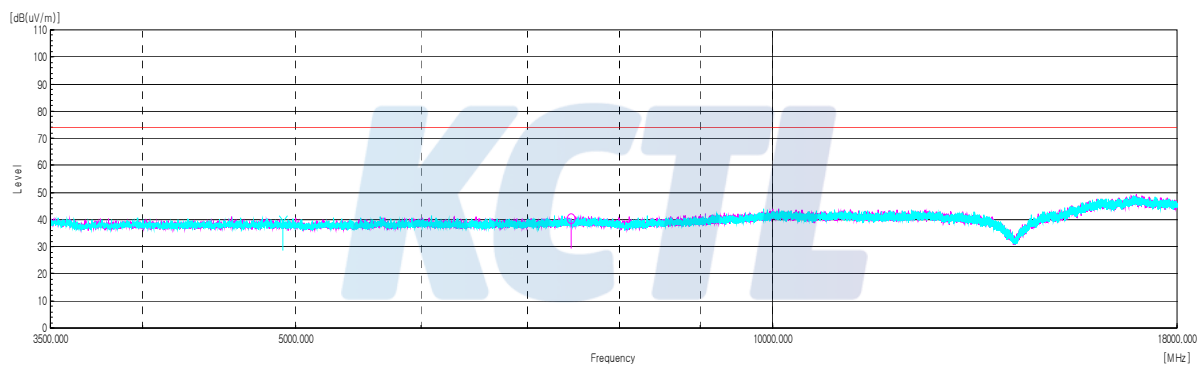
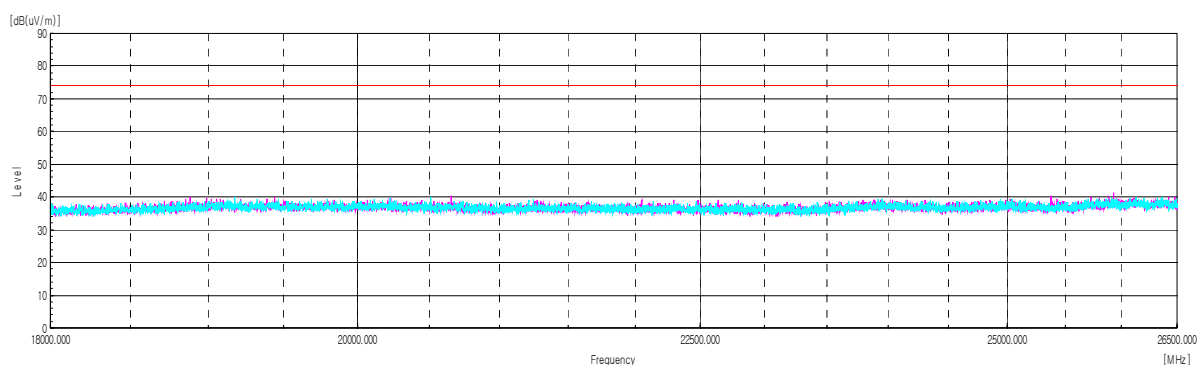
Highest Channel (2 452 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.50 ¹⁾	H	57.81	32.25	-25.46	-	64.60	74.00	9.40
4 908.19 ¹⁾	V	57.41	34.12	-52.03	-	39.50	74.00	34.50
7 461.14 ¹⁾	H	54.91	35.69	-50.10	-	40.50	74.00	33.50
Average Data								
2 483.50 ¹⁾	H	42.55	32.25	-25.46	0.43	49.77	54.00	4.23

Average data (2 483.50 MHz)

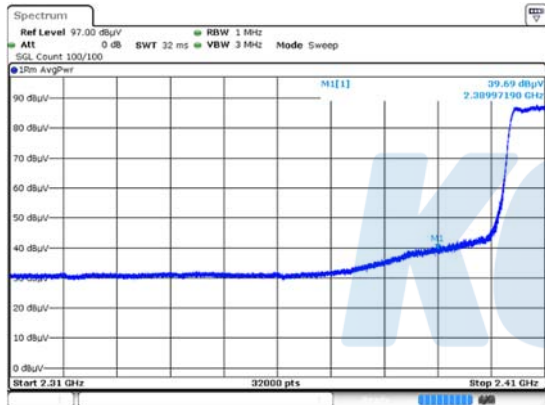
Blank

Horizontal/Vertical for Band-edge

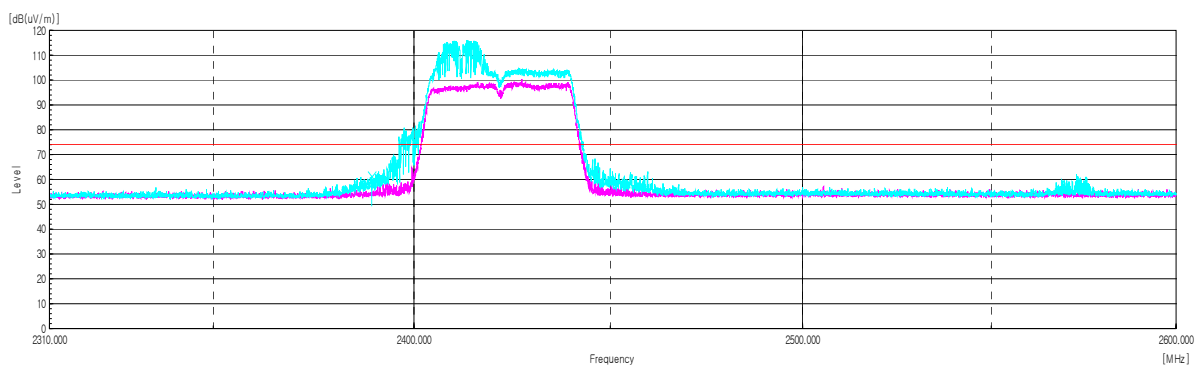
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

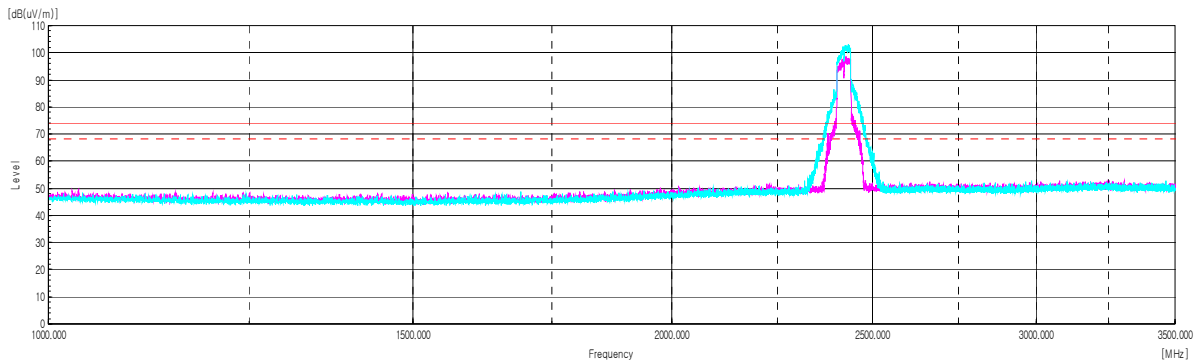
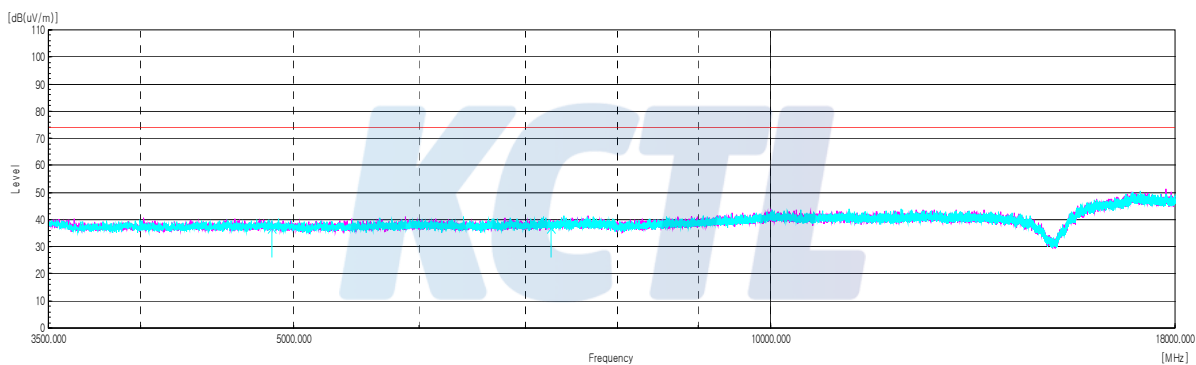
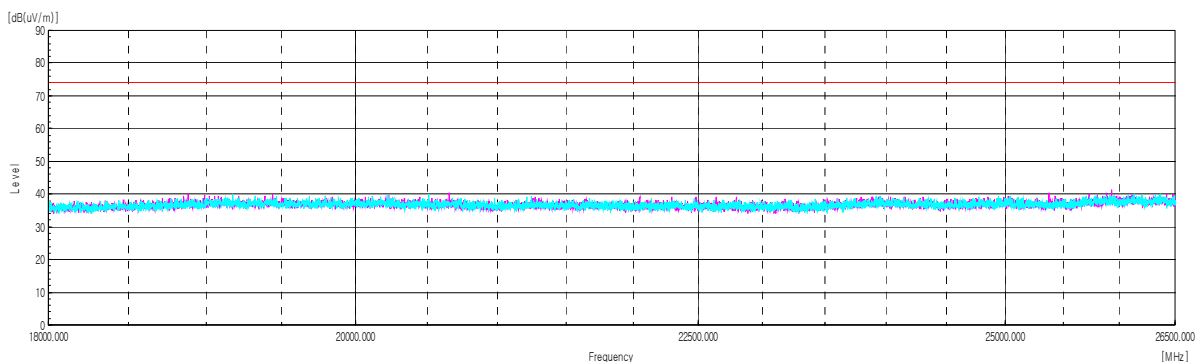
802.11n HT40 ANT 2**Lowest Channel (2 422 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.97 ¹⁾	V	54.68	31.97	-25.55	-	61.10	74.00	12.90
4 843.74 ¹⁾	V	54.74	34.13	-51.97	-	36.90	74.00	37.10
7 266.99 ¹⁾	V	51.90	35.65	-50.45	-	37.10	74.00	36.90
Average Data								
2 389.97 ¹⁾	V	39.69	31.97	-25.55	0.22	46.33	54.00	7.67

Average data (2 389.97 MHz)

Blank

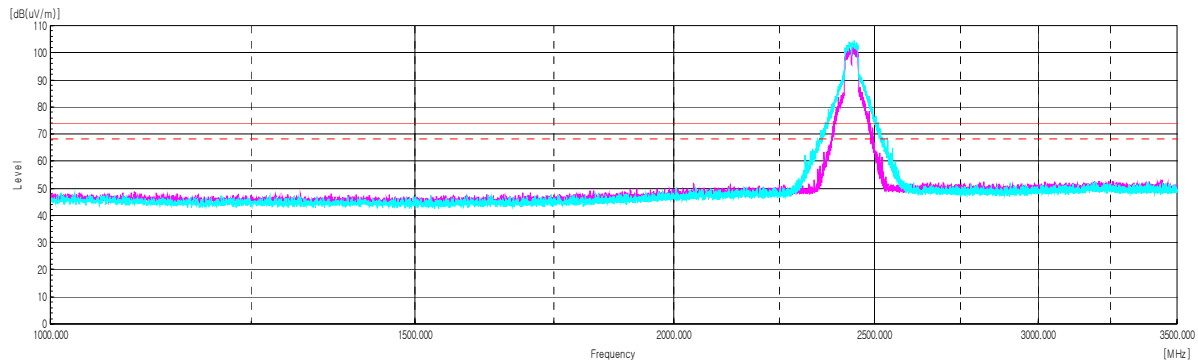
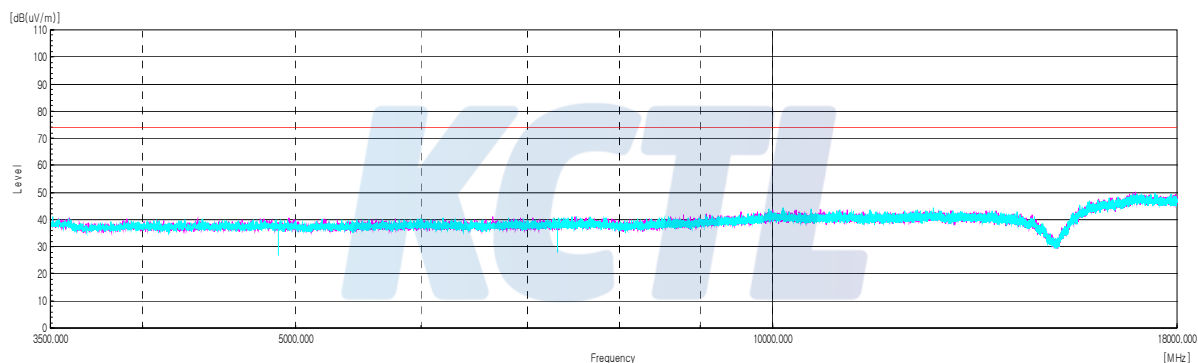
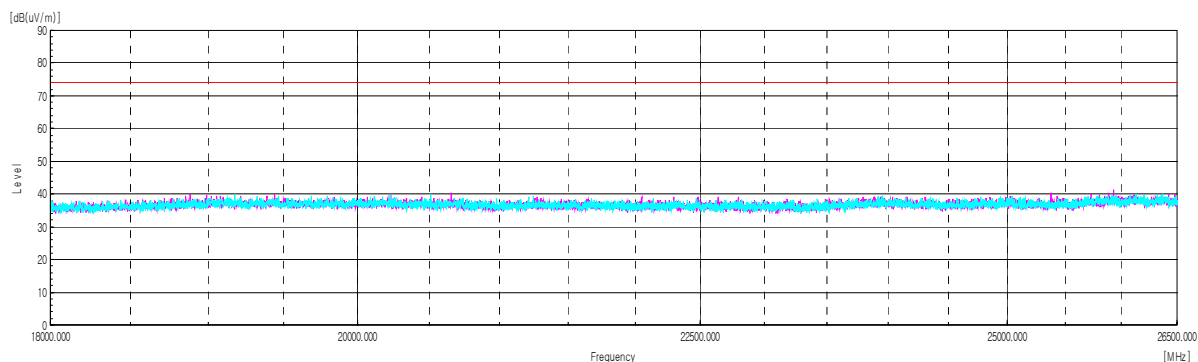
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

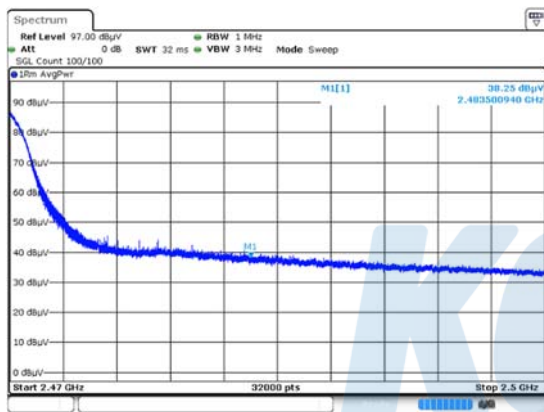
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
4 876.77 ¹⁾	V	55.78	34.12	-52.00	-	37.90	74.00	36.10
7 311.29 ¹⁾	V	53.51	35.66	-50.37	-	38.80	74.00	35.20
Average Data								
No spurious emissions were detected within 20 dB of the limit								



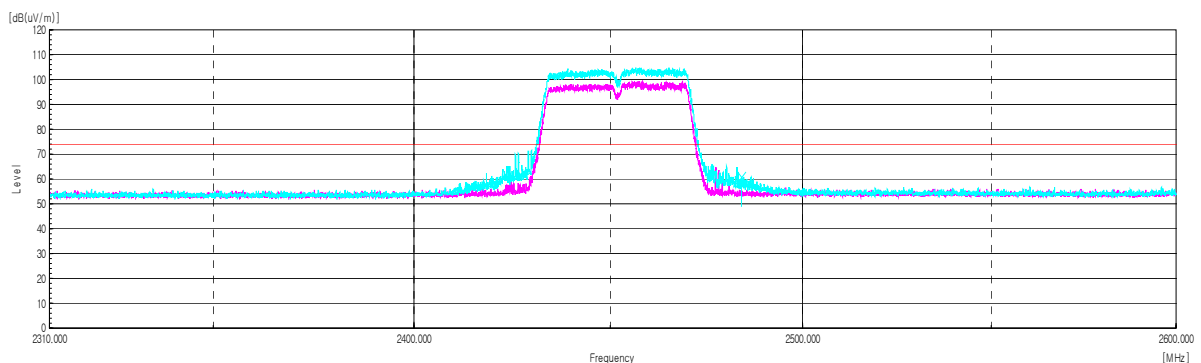
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

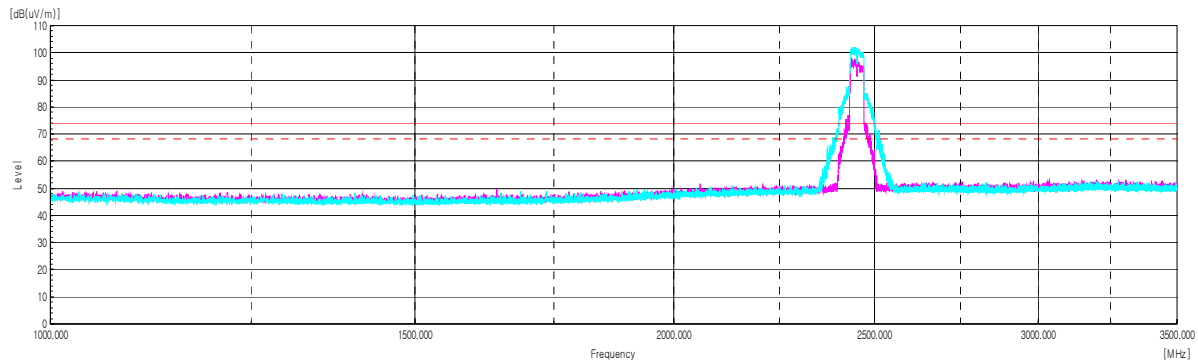
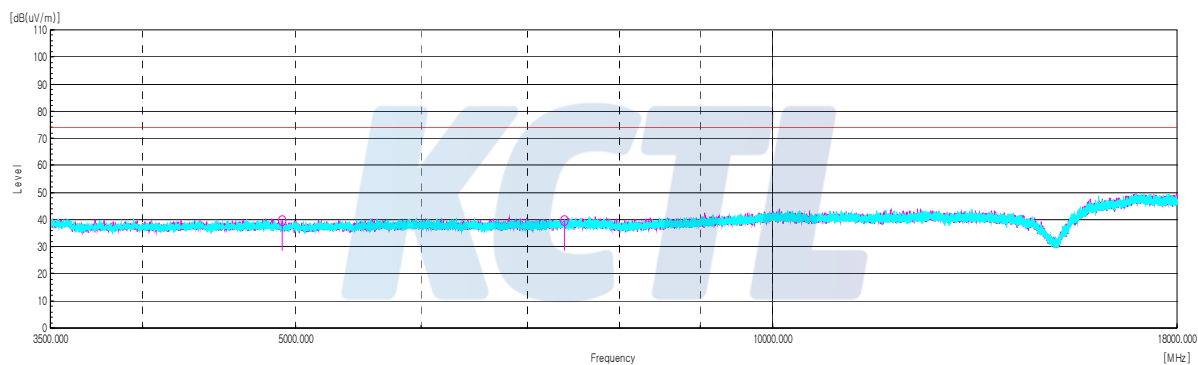
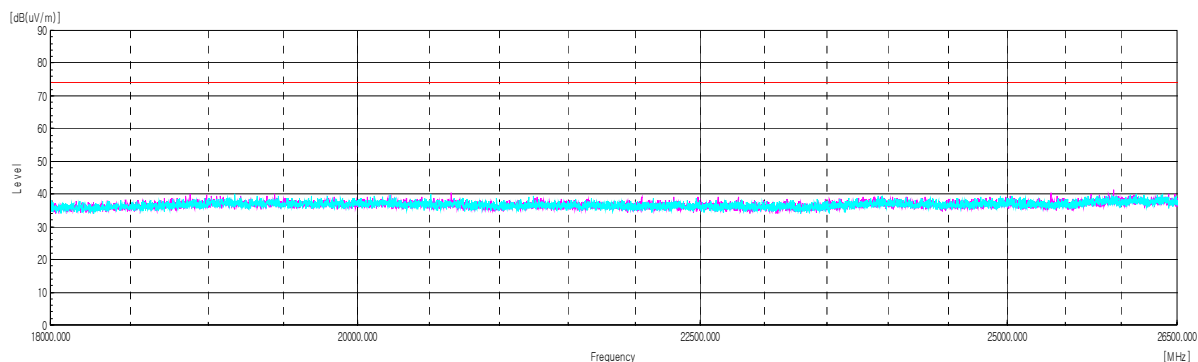
Highest Channel (2 452 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 483.50 ¹⁾	V	54.21	32.25	-25.46	-	61.00	74.00	13.00
4 902.55 ¹⁾	H	57.40	34.12	-52.02	-	39.50	74.00	34.50
7 382.99 ¹⁾	H	54.16	35.68	-50.24	-	39.60	74.00	34.40
Average Data								
2 483.50 ¹⁾	V	38.25	32.25	-25.46	0.43	45.47	54.00	8.53

Average data (2 483.50 MHz)

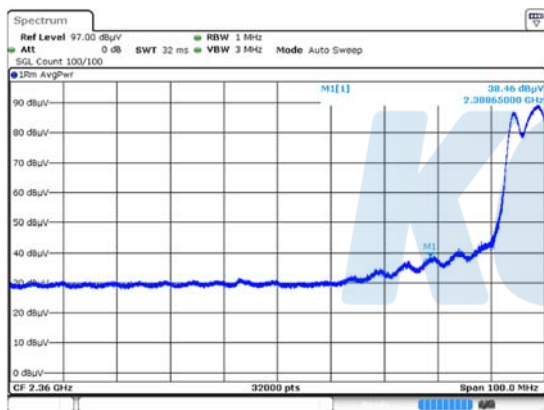
Blank

Horizontal/Vertical for Band-edge

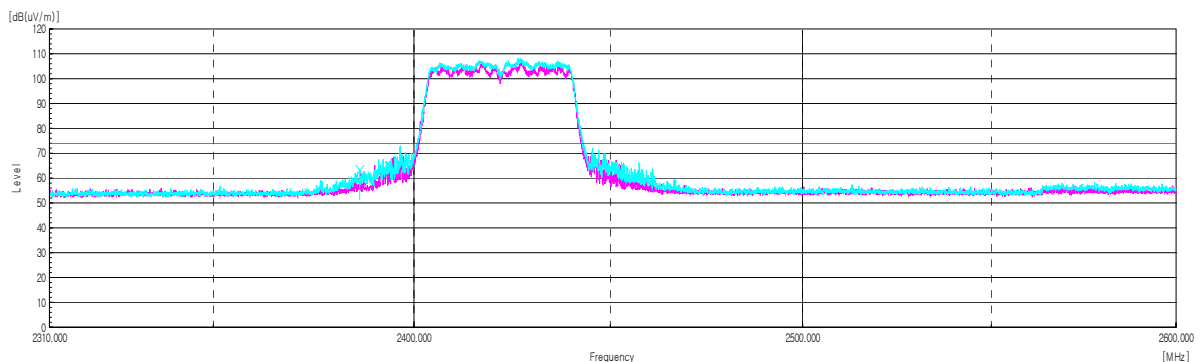
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

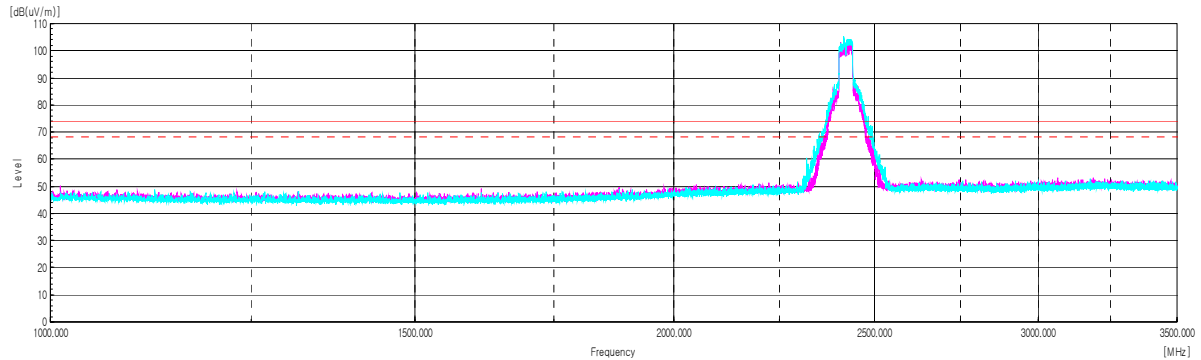
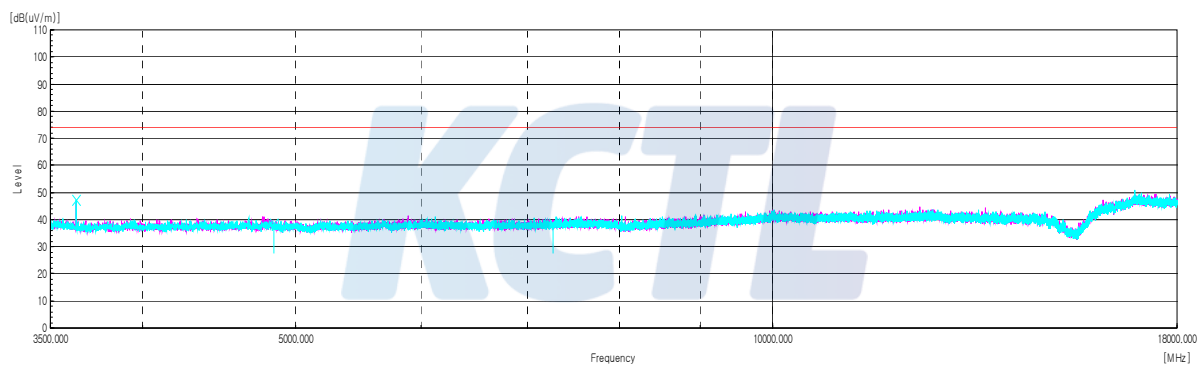
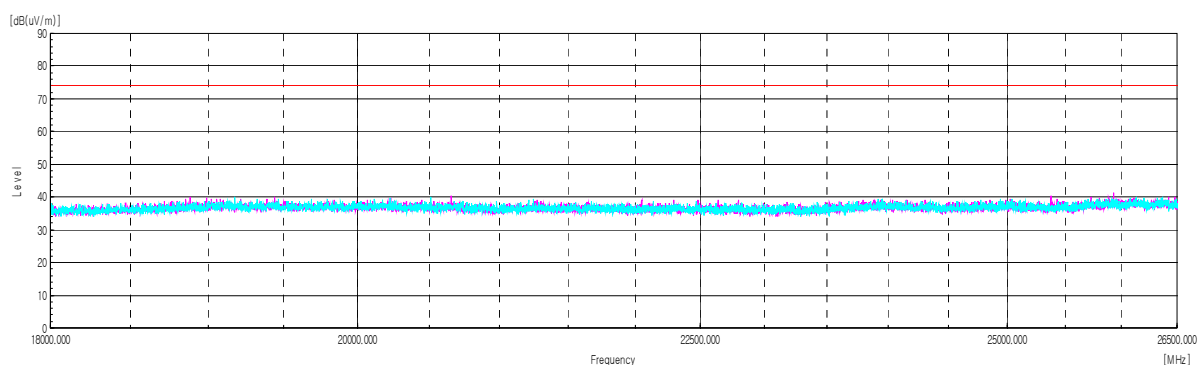
802.11n HT40 3TX MIMO**Lowest Channel (2 422 MHz)**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 388.65 ¹⁾	V	56.97	31.97	-25.54	-	63.40	74.00	10.60
3 632.92 ¹⁾	V	67.73	33.11	-53.44	-	47.40	74.00	26.60
4 844.55 ¹⁾	V	56.44	34.13	-51.97	-	38.60	74.00	35.40
7 265.38 ¹⁾	V	53.21	35.65	-50.46	-	38.40	74.00	35.60
Average Data								
2 388.65 ¹⁾	V	38.46	31.97	-25.54	0.43	45.32	54.00	8.68

Average data (2 388.65 MHz)

Blank

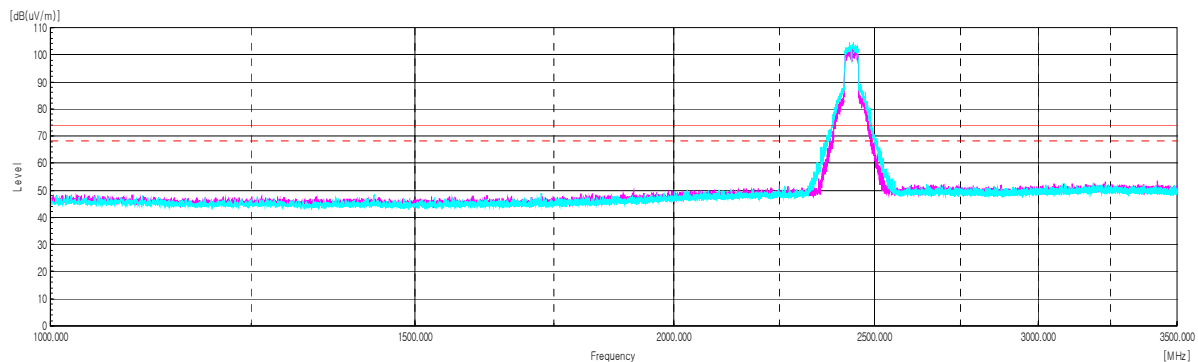
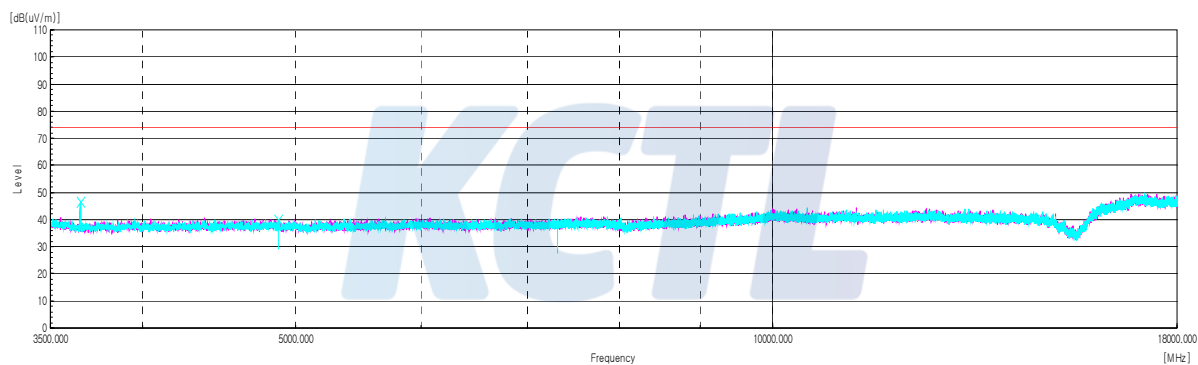
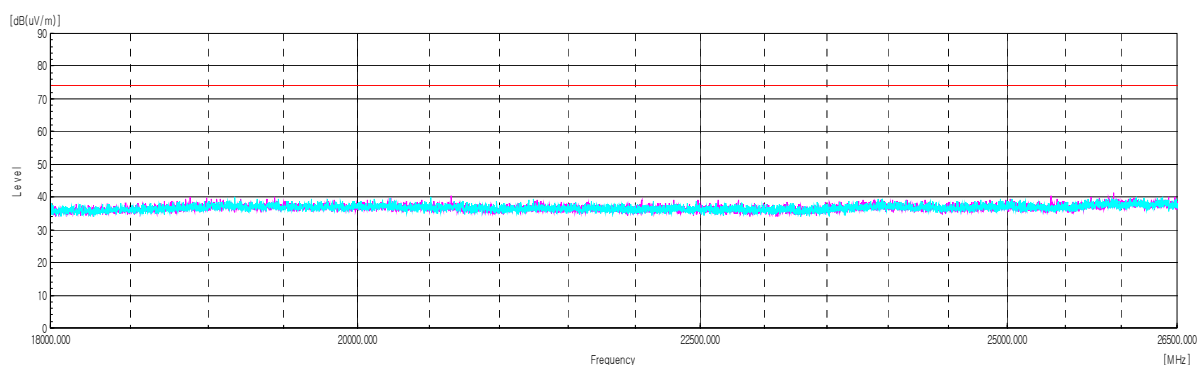
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel (2 437 MHz)

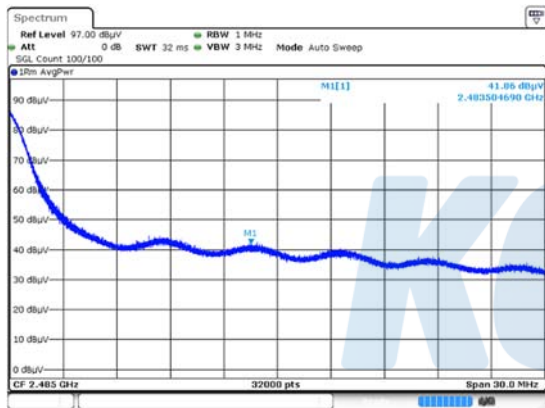
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
3 655.48 ¹⁾	V	66.84	33.12	-53.36	-	46.60	74.00	27.40
4 874.35 ¹⁾	V	57.67	34.13	-52.00	-	39.80	74.00	34.20
7 312.91 ¹⁾	V	53.41	35.66	-50.37	-	38.70	74.00	35.30
Average Data								
No spurious emissions were detected within 20 dB of the limit								



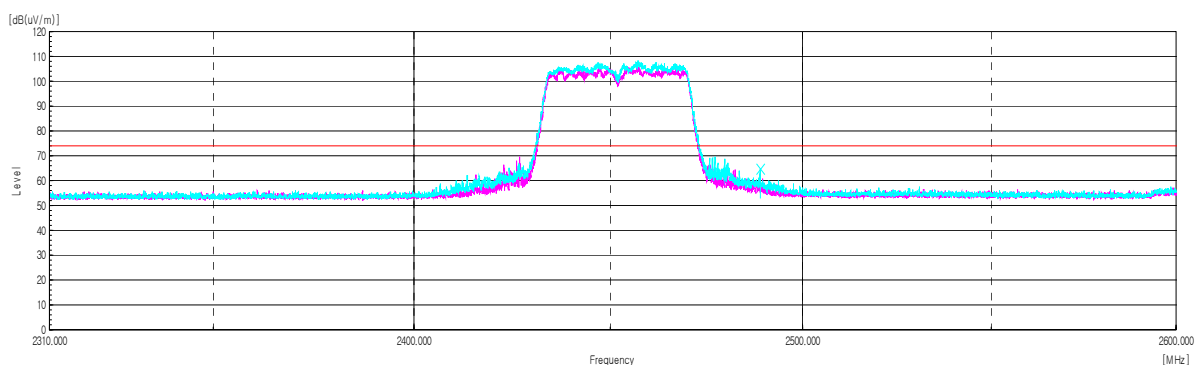
Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

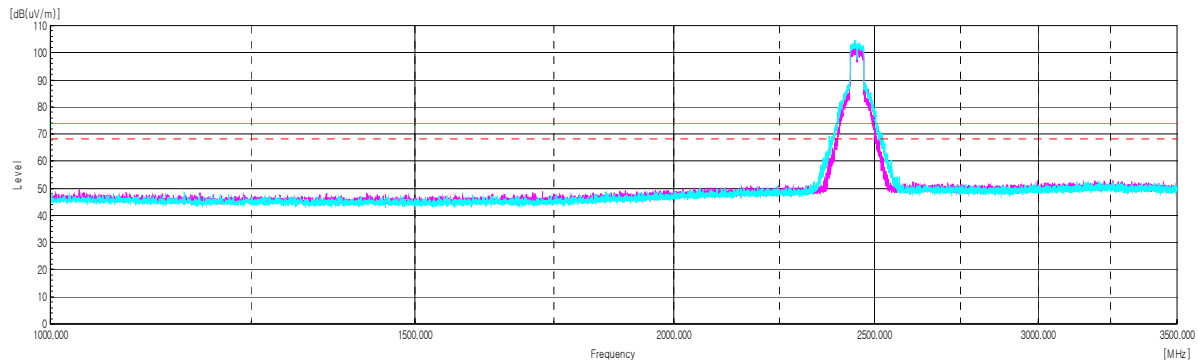
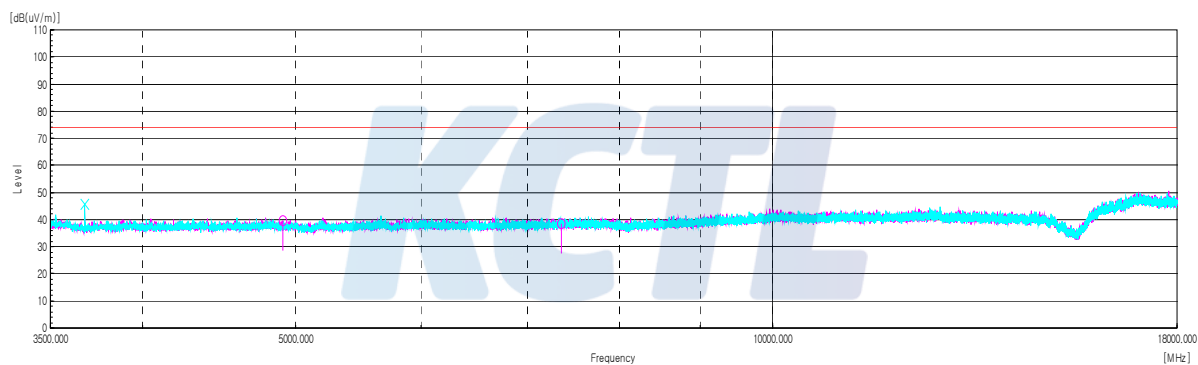
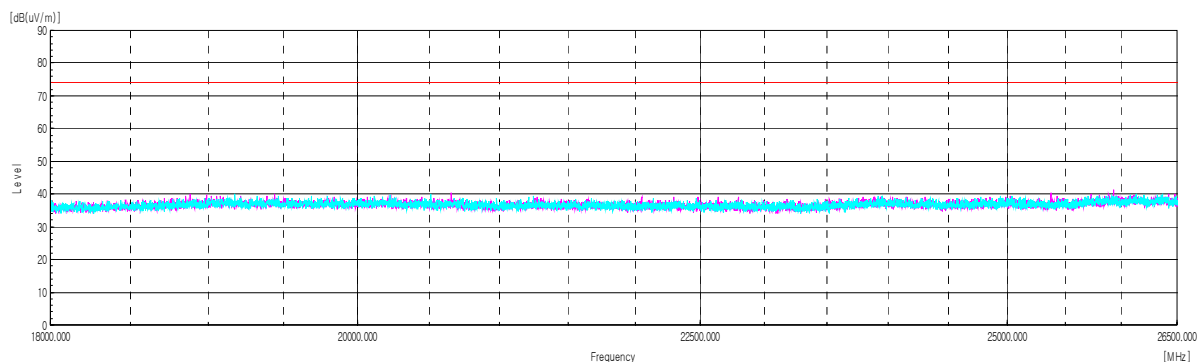
Highest Channel (2 452 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 483.50 ¹⁾	V	58.11	32.25	-25.46	-	64.90	74.00	9.10
3 678.04 ¹⁾	V	65.94	33.14	-53.28	-	45.80	74.00	28.20
4 904.97 ¹⁾	H	57.31	34.12	-52.03	-	39.40	74.00	34.60
7 357.21 ¹⁾	H	53.22	35.67	-50.29	-	38.60	74.00	35.40
Average Data								
2 483.50 ¹⁾	V	41.86	32.25	-25.46	0.43	49.08	54.00	4.92

Average data (2 483.50 MHz)

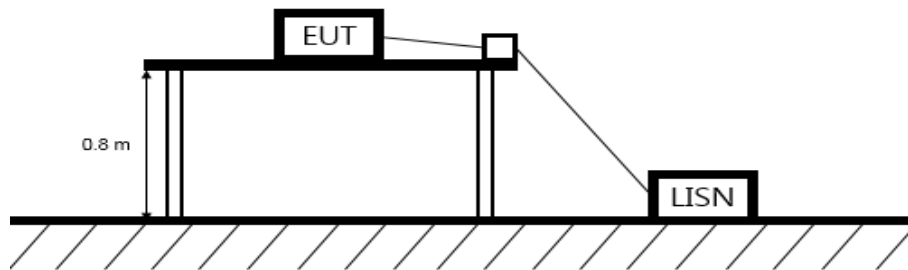
Blank

Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7.7. AC Conducted emission

Test setup



Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

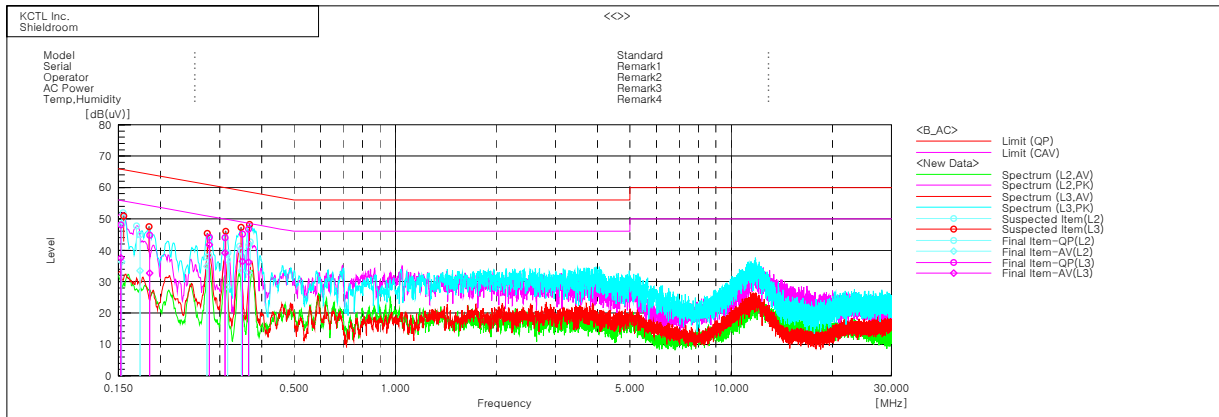
Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Test procedure

ANSI C63.10-2013 - Section 6.2

Test settings

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results**Worst case: 802.11n HT40 / MIMO / 2 422 MHz****Final Result**

--- L2 Phase ---

No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.15347	38.2	26.3	10.1	48.3	36.4	65.8	55.8	17.5	19.4
2	0.17393	34.6	23.2	10.3	44.9	33.5	64.8	54.8	19.9	21.3
3	0.27496	27.9	25.0	9.9	37.8	34.9	61.0	51.0	23.2	16.1
4	0.31681	27.0	18.2	10.0	37.0	28.2	59.8	49.8	22.8	21.6
5	0.34832	29.7	23.4	10.1	39.8	33.5	59.0	49.0	19.2	15.5
6	0.36658	31.7	22.8	10.1	41.8	32.9	58.6	48.6	16.8	15.7

--- L3 Phase ---

No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.15263	38.0	27.5	10.1	48.1	37.6	65.9	55.9	17.8	18.3
2	0.18578	34.5	22.4	10.3	44.8	32.7	64.2	54.2	19.4	21.5
3	0.2796	34.2	31.8	9.9	44.1	41.7	60.8	50.8	16.7	9.1
4	0.31173	34.0	29.1	10.0	44.0	39.1	59.9	49.9	15.9	10.8
5	0.3507	35.1	26.3	10.1	45.2	36.4	58.9	48.9	13.7	12.5
6	0.3658	36.7	26.1	10.1	46.8	36.2	58.6	48.6	11.8	12.4

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100914	20.10.14
Spectrum Analyzer	R&S	FSV40	100988	21.01.03
Power Sensor	R&S	NRP-Z81	1137.9009.02-106223-bB	21.05.21*
Pulse Power Meter	ANRITSU	ML2495A	1608009	21.07.29
Pulse Power Sensor	ANRITSU	MA2411B	1726174	21.07.29
EMI TEST RECEIVER	R&S	ESCI7	100732	20.08.22
Bi-Log Antenna	TESEQ	CBL 6112D	37876	20.07.20
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
ATTENUATOR	Agilent	8491B	MY39270292	20.07.20
Horn antenna	ETS.lindgren	3116	00086632	21.02.17
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Attenuator	API Inmet	40AH2W-10	12	21.05.12*
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2031196	21.02.12
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	21.01.22
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	maturo GmbH	TT 3.0 3T	-	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	21.05.11*
TWO-LINE V - NETWORK	R&S	ENV216	101358	20.10.02
EMI TEST RECEIVER	R&S	ESCI	100001	20.08.22
Vector Signal Generator	R&S	SMBV100A	257566	20.07.16
Signal Generator	R&S	SMR40	100007	21.04.08

* Tests related to this equipment were progressed after the calibration was completed.

End of test report