

RF TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Puductor 2 Robot

ISSUED TO
SHENZHEN PUDU TECHNOLOGY CO., LTD.

Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China



Tested by: Ye Hongji
Ye Hongji

Date: Sep. 23, 2021

Approved by: Liao Jianming
Liao Jianming
(Technical Director)

Date: Sep. 23, 2021

Report No.: BL-SZ2160056-601
EUT Name: Puductor 2 Robot
Model Name: PJ2
Brand Name: PUDU
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 2
FCC ID: 2AXDW-PJ2
ISED Number: 26126-PJ2

Test conclusion: Pass
Test Date: Jun. 23, 2021 ~ Jul. 08, 2021
Date of Issue: Sep. 23, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Sep. 14, 2021</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Sep. 23, 2021</u>	<u>Updated the information and remarks in section 2.5</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information.....	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS.....	11
3.1	Test Standards	11
3.2	Verdict	12
4	GENERAL TEST CONFIGURATIONS.....	13
4.1	Test Environments	13
4.2	Test Equipment List.....	13
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz).....	16
4.5	Measurement Results Explanation Example.....	17

4.5.1	For conducted test items:	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Frequency Hopping Systems	19
5.2.1	Relevant Standards	19
5.2.2	Description of the systems	19
5.3	Number of Hopping Frequencies	21
5.3.1	Limit.....	21
5.3.2	Test Setup	21
5.3.3	Test Procedure	21
5.3.4	Test Result	21
5.4	Peak Output Power and E.I.R.P.....	22
5.4.1	Test Limit.....	22
5.4.2	Test Setup	22
5.4.3	Test Procedure	22
5.4.4	Test Result	22
5.5	Occupied Bandwidth	23
5.5.1	Limit.....	23
5.5.2	Test Setup	23
5.5.3	Test Procedure	23
5.5.4	Test Result	23
5.6	Carrier Frequency Separation	24
5.6.1	Limit.....	24
5.6.2	Test Setup	24
5.6.3	Test Procedure	24
5.6.4	Test Result	24
5.7	Time of Occupancy (Dwell time)	25
5.7.1	Limit.....	25
5.7.2	Test Setup	25
5.7.3	Test Procedure	25

5.7.4	Test Result	26
5.8	Conducted Spurious Emission & Authorized-band band-edge	27
5.8.1	Limit.....	27
5.8.2	Test Setup	27
5.8.3	Test Procedure	27
5.8.4	Test Result	27
5.9	Conducted Emission	28
5.9.1	Limit.....	28
5.9.2	Test Setup	28
5.9.3	Test Procedure	28
5.9.4	Test Result	28
5.10	Radiated Spurious Emission	29
5.10.1	Limit.....	29
5.10.2	Test Setup	29
5.10.3	Test Procedure	29
5.10.4	Test Result	30
5.11	Band Edge (Restricted-band band-edge).....	31
5.11.1	Limit.....	31
5.11.2	Test Setup	31
5.11.3	Test Procedure	31
5.11.4	Test Result	31
ANNEX A	TEST RESULT	32
A.1	Number of Hopping Frequency	32
A.2	Peak Output Power and E.I.R.P.....	34
A.3	20 dB and 99% bandwidth	40
A.4	Hopping Frequency Separation.....	49
A.5	Average Time of Occupancy	50
A.6	Conducted Spurious Emissions & Authorized-band band-edge	55
A.7	Conducted Emissions.....	69
A.8	Radiated Spurious Emission	73
A.9	Band Edge (Restricted-band band-edge).....	109
ANNEX B	TEST SETUP PHOTOS	114
ANNEX C	EUT EXTERNAL PHOTOS	114

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China

2.3 Factory Information

Factory	Dongguan Legion Electronic Technology Co., Ltd.
Address	Room 101, No.88, Pingshan Industrial Road, Tangxia No. 135 Dongkeng Road, Dongkeng Town, Dongguan, P. R. China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Puductor 2 Robot
Model Name Under Test	PJ2
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	65001611310007
Hardware Version	V3
Software Version	V7.1.1.22
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/2A/2C/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology		FHSS
Modulation Type		GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type		☒ Mobile ☐ Portable ☐ Fix Location
Transfer Rate		DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range		The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel		79 (at intervals of 1 MHz)
Tested Channel		0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	AP module	FPC Antenna
	ESP module	
Antenna Gain	AP module	1.88 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
	ESP module	
Antenna Impedance		50 Ω
Antenna System (MIMO Smart Antenna)		N/A
Note: This report reflects the test data of two EUT Module, One is Ap module and the other is ESP Module. AP Module has Main Antenna, Aux. Antenna, and MIMO Antenna. ESP Module only single Antenna. Two modules cannot fire at the same time.		

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.6 Additional Instructions

AP module

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	AMPAK		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 0
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:



ESP module


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	EspRFtestTool		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 6
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

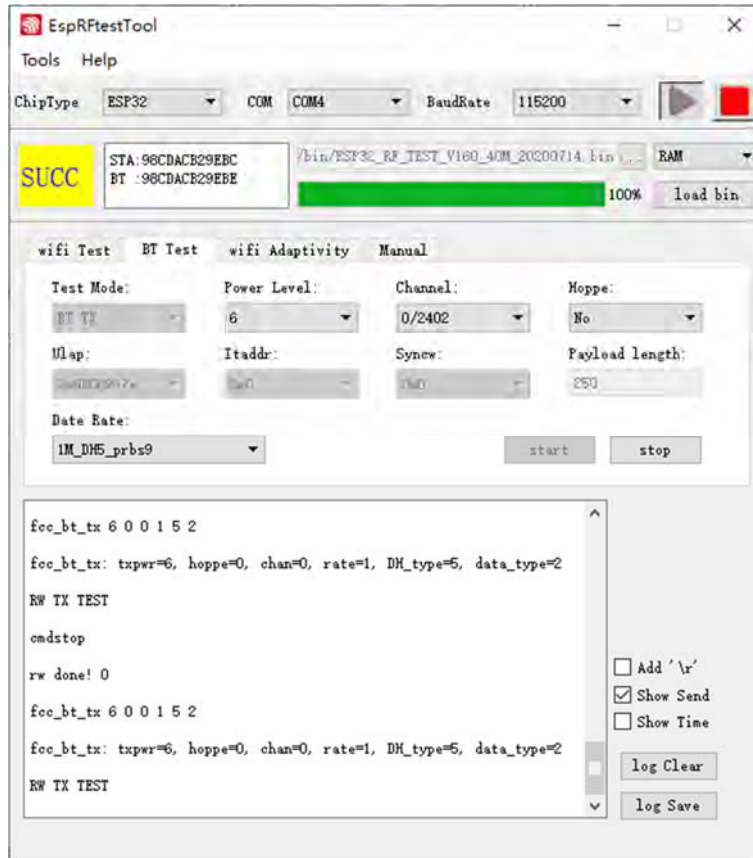

The screenshot displays the EspRFtestTool application. At the top, there are dropdown menus for ChipType (ESP32), COM (COM4), and BaudRate (115200). Below these, a yellow 'SUCC' box indicates a successful connection. The main configuration area includes fields for STA (98CDACB29EBC) and BT (98CDACB29EBC) addresses, a file path for the test binary, and a 'load bin.' button. The 'Test Mode' is set to 'BT TX', 'Power Level' is 6, 'Channel' is 0/2402, and 'Hoppe' is No. The 'Data Rate' is set to '1M_DH5_prbs9'. The bottom section shows a log of commands and responses, including 'foc_bt_tx 6 0 0 1 5 2' and 'RW TX TEST'. There are checkboxes for 'Add \'\'', 'Show Send', and 'Show Time', along with 'log Clear' and 'log Save' buttons.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (b)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	26 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2019.08.08	2022.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±2.8%
RF output power, conducted	±1.28 dB
Power Spectral Density, conducted	±1.30 dB
Unwanted Emissions, conducted	±1.84 dB
All emissions, radiated	±5.36 dB
Temperature	±0.82°C
Humidity	±4.1%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

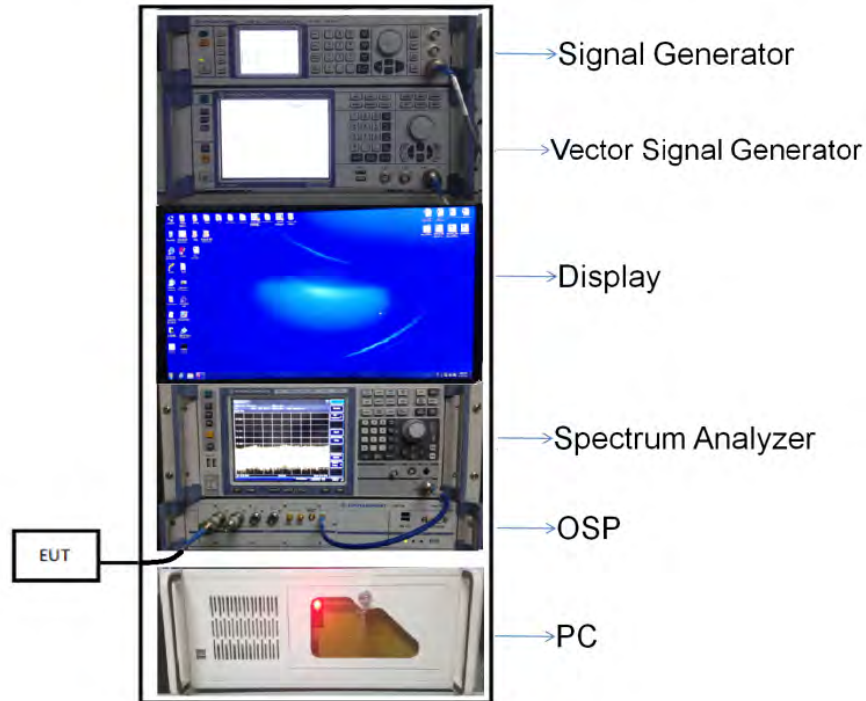


(Diagram 1)

4.4.2 For AC Power Supply Port Test

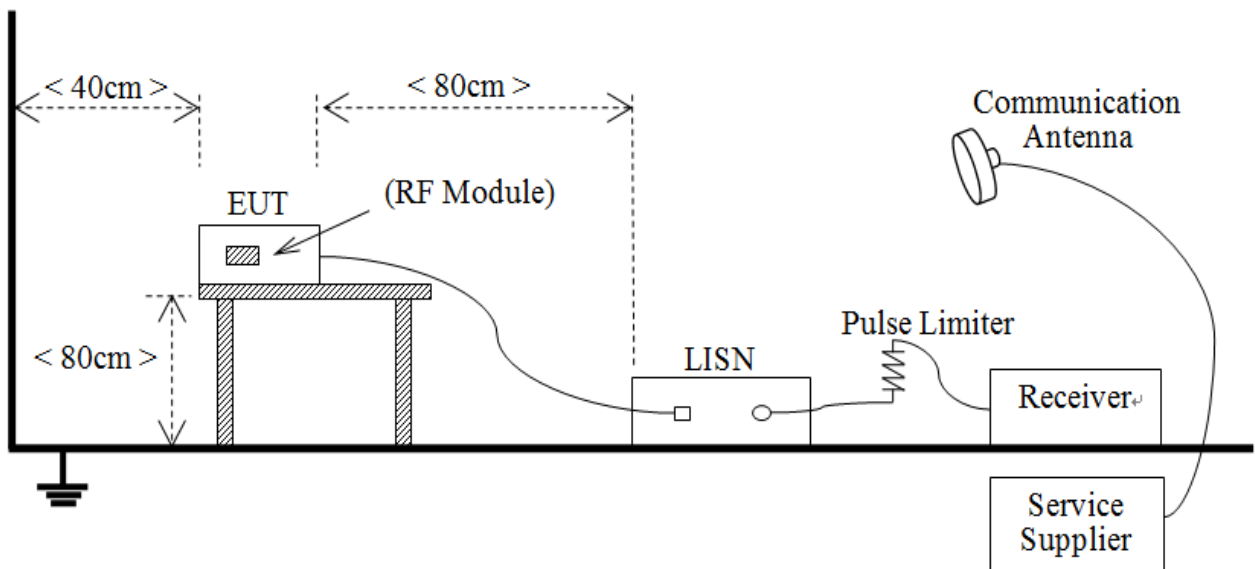


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

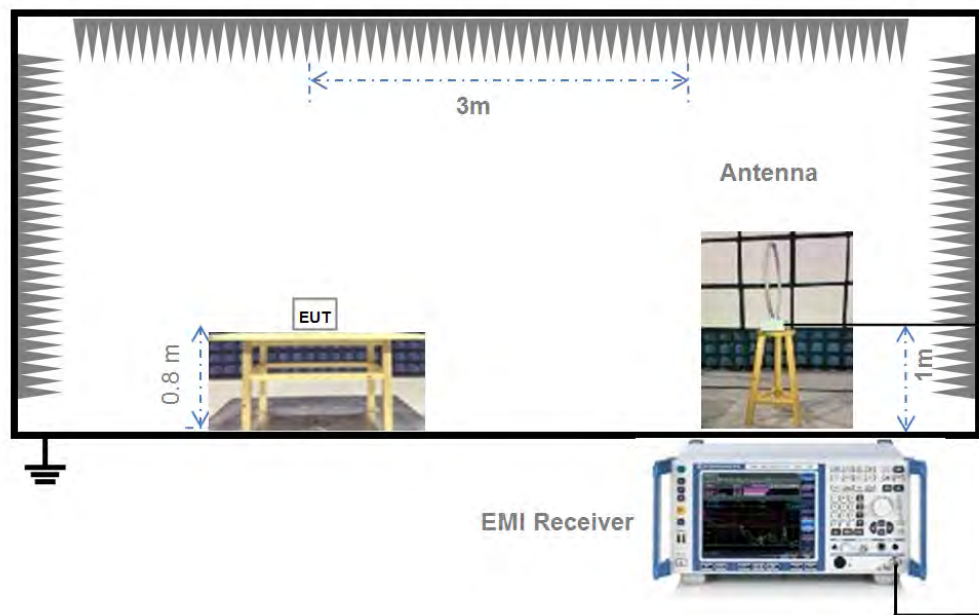


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

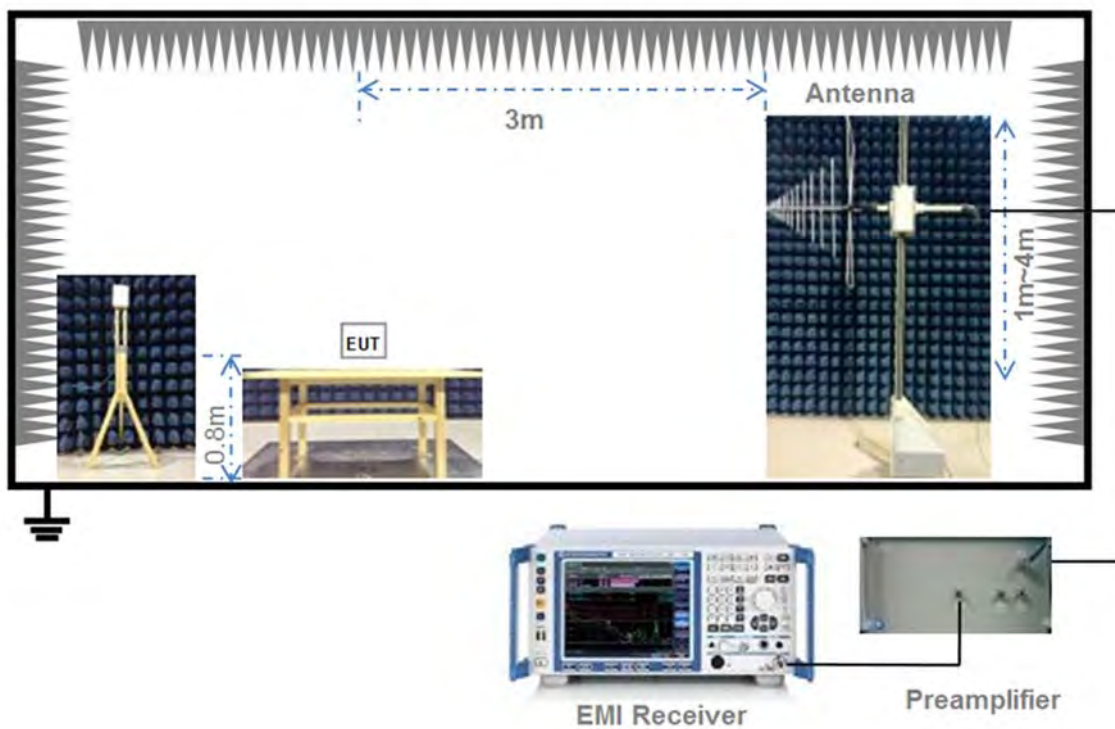

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

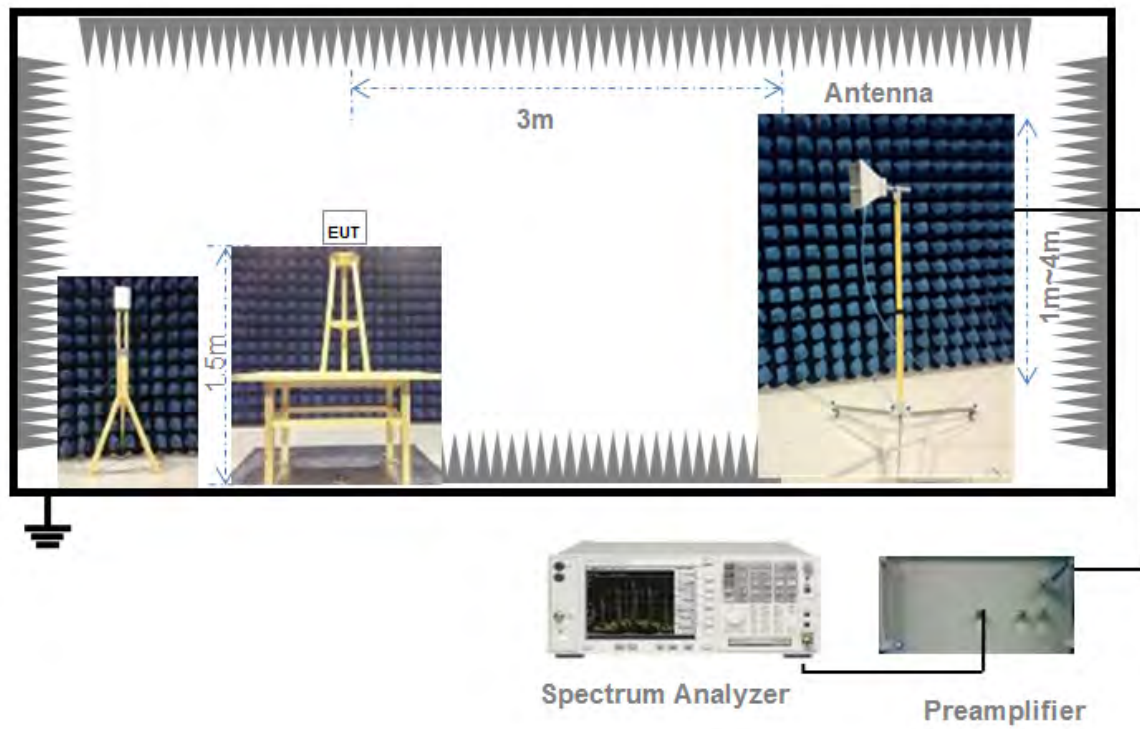

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems


1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

AP module

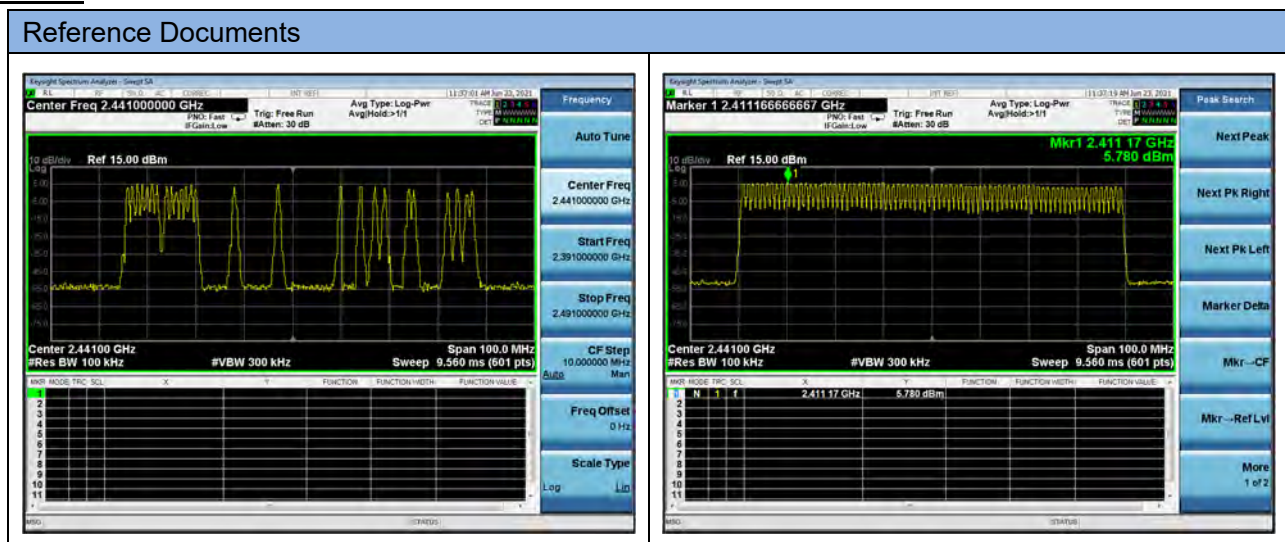

ESP module

Reference Documents

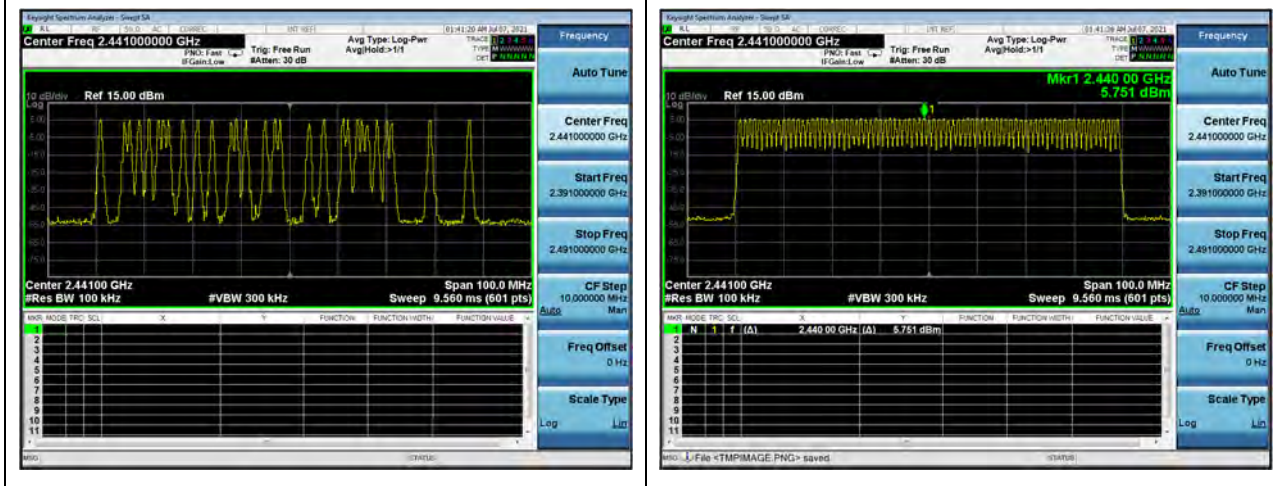

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency

Test Data

AP module

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


ESP module

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


Test plots

AP module

GFSK 2.4 GHz ~ 2.4415 GHz

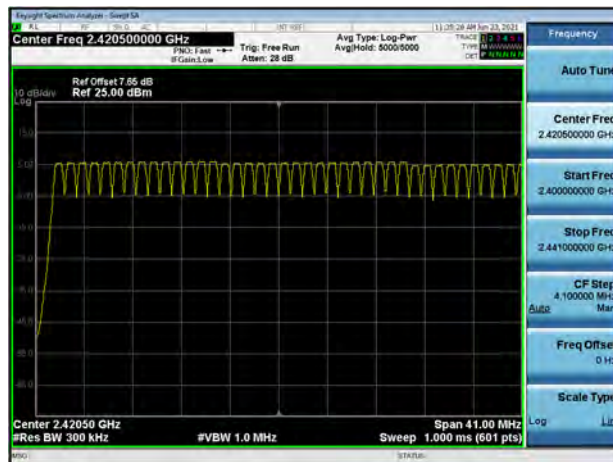


GFSK 2.4415 GHz ~ 2.4835 GHz

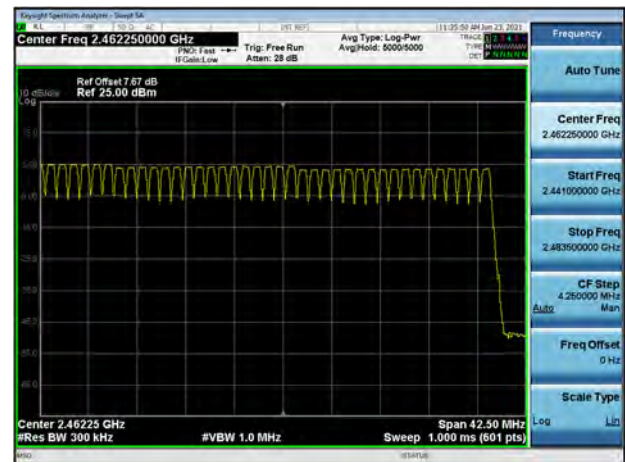

8-DPSK 2.4 GHz ~ 2.4415 GHz




8-DPSK 2.4415 GHz ~ 2.4835 GHz

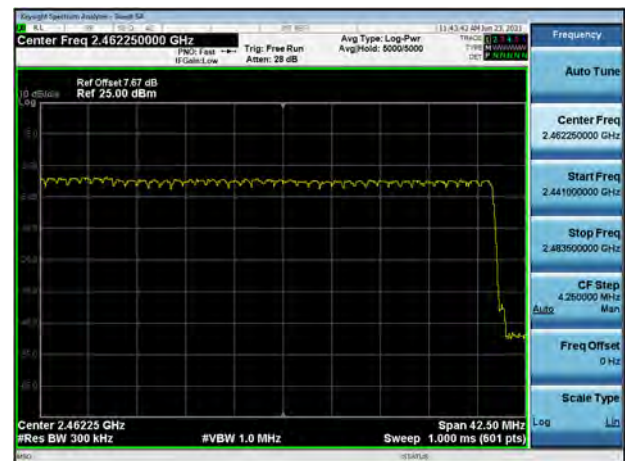


ESP module


GFSK 2.4 GHz ~ 2.4415 GHz

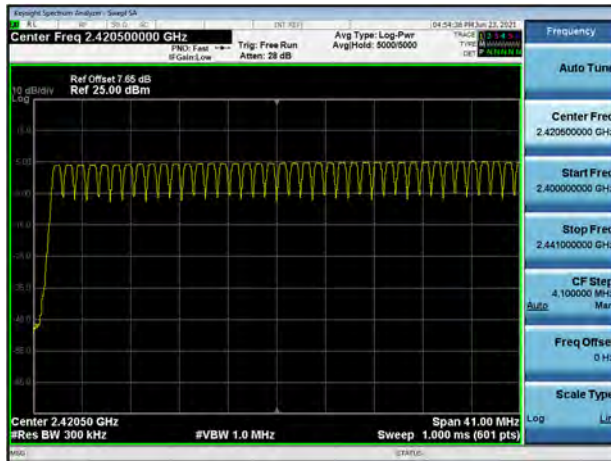


GFSK 2.4415 GHz ~ 2.4835 GHz

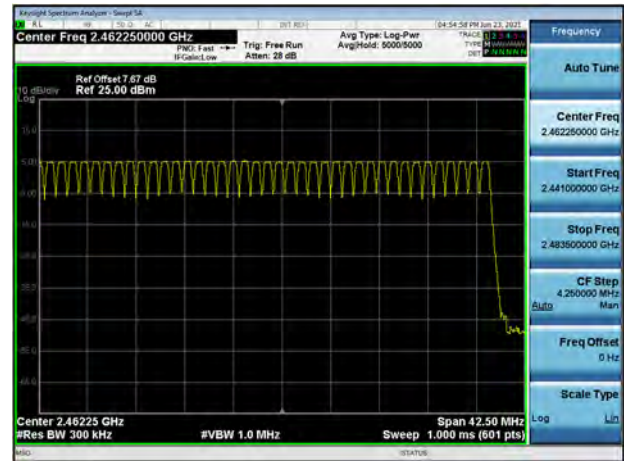

8-DPSK 2.4 GHz ~ 2.4415 GHz

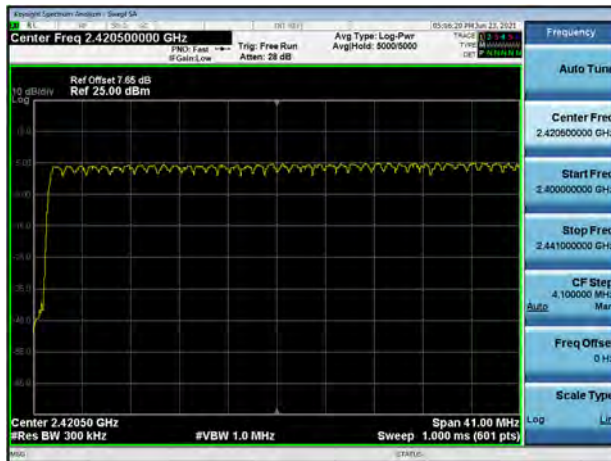

8-DPSK 2.4415 GHz ~ 2.4835 GHz

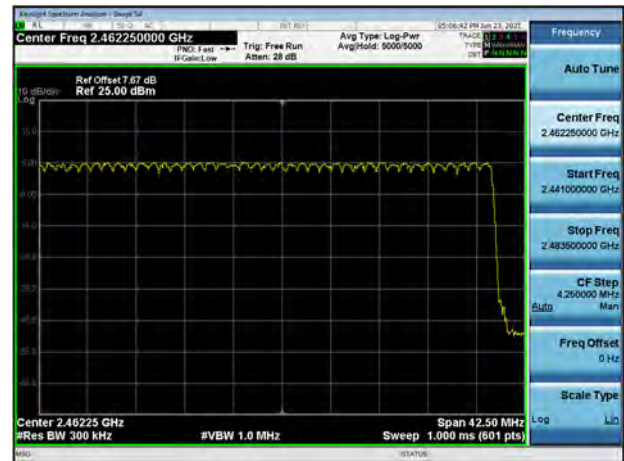

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

AP module

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	5.63	3.65	21	125	Pass
Middle	5.26	3.35			Pass
High	3.86	2.43			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	3.86	2.43	4.33	2.71	21	125	Pass
Middle	3.70	2.34	4.10	2.57			Pass
High	2.79	1.90	3.12	2.05			Pass

ESP module

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	4.42	2.77	21	125	Pass
Middle	5.37	3.44			Pass
High	5.38	3.45			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	6.54	4.51	6.96	4.96	21	125	Pass
Middle	7.50	5.62	7.92	6.19			Pass
High	7.55	5.69	7.99	6.29			Pass

E.I.R.P Test Data (For ISED)

AP module

Channel	E.I.R.P						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	7.51	5.64	5.74	3.75	6.21	4.18	36	4000	Pass
Middle	7.14	5.18	5.58	3.61	5.98	3.96			Pass
High	5.74	3.75	4.67	2.93	5.00	3.16			Pass

ESP module

Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	6.30	4.27	8.42	6.95	8.84	7.66	36	4000	Pass
Middle	7.25	5.31	9.38	8.67	9.80	9.55			Pass
High	7.26	5.32	9.43	8.77	9.87	9.71			Pass

Test plots

AP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL




$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL

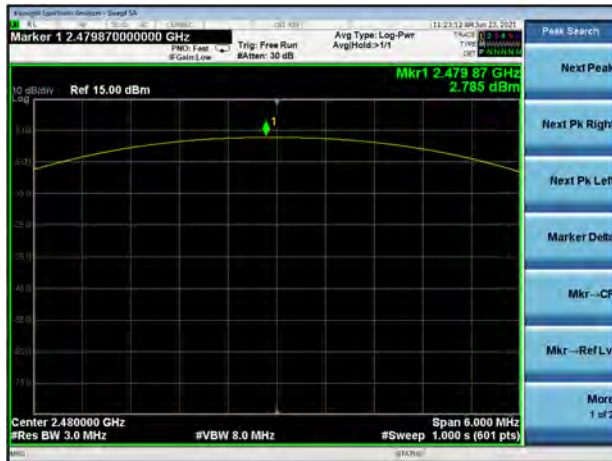

8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



ESP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

AP module

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.970000	0.909510
Middle	0.970000	0.909590
High	0.975000	0.910910
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.360000	1.204500
Middle	1.360000	1.203500
High	1.360000	1.203400
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.315000	1.202800
Middle	1.335000	1.202500
High	1.330000	1.202000

ESP module

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.945000	0.830870
Middle	0.950000	0.831030
High	0.950000	0.831560
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.330000	1.177400
Middle	1.330000	1.177900
High	1.330000	1.179200
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.310000	1.176700
Middle	1.315000	1.177700
High	1.315000	1.179800

Test plots

20 dB Bandwidth

AP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



ESP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



99% Bandwidth

AP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



ESP module

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.4 Hopping Frequency Separation

Test Data

AP module

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.003	0.650000	Pass
8-DPSK	1.003	0.890000	Pass


ESP module

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.003	0.633333	Pass
8-DPSK	1.003	0.876667	Pass

Test Plots

AP module

GFSK

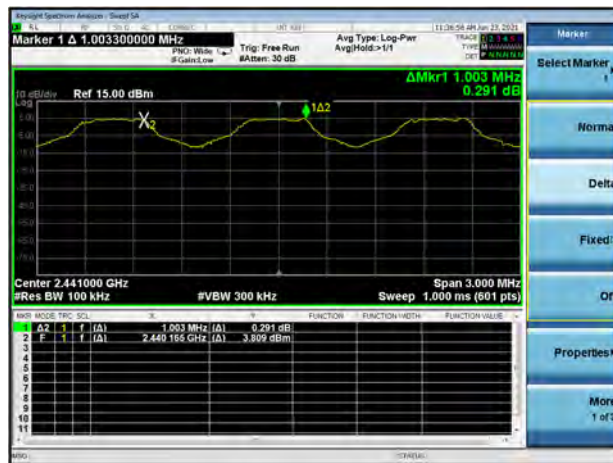


8-DPSK




ESP module

GFSK

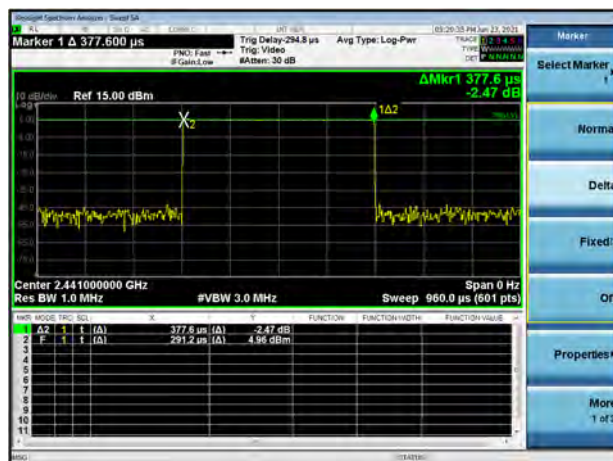

8-DPSK

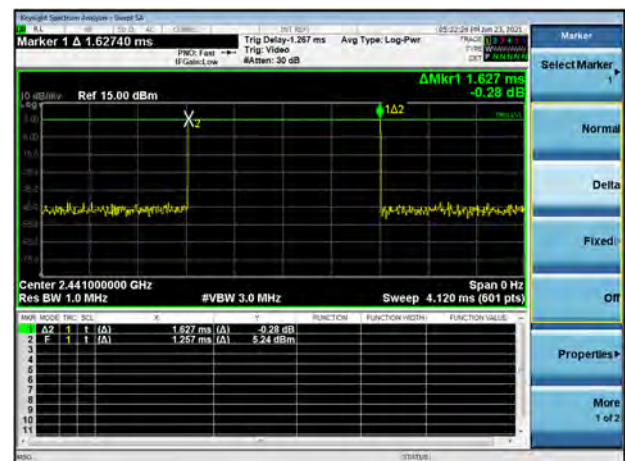

A.5 Average Time of Occupancy

Test Data

AP module

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38240	122.368	0.4	Pass
DH 3	1.63400	261.440	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38880	124.416	0.4	Pass
DH 3	1.64100	262.560	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38240	61.184	0.4	Pass
DH 3	1.63400	130.720	0.4	Pass
DH 5	2.88800	154.027	0.4	Pass


ESP module

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37760	120.832	0.4	Pass
DH 3	1.62700	260.320	0.4	Pass
DH 5	2.88400	307.627	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38720	123.904	0.4	Pass
DH 3	1.64100	262.560	0.4	Pass
DH 5	2.89500	308.800	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37600	60.160	0.4	Pass
DH 3	1.23600	98.880	0.4	Pass
DH 5	2.88400	153.813	0.4	Pass


Test Plots

AP module


GFSK DH1

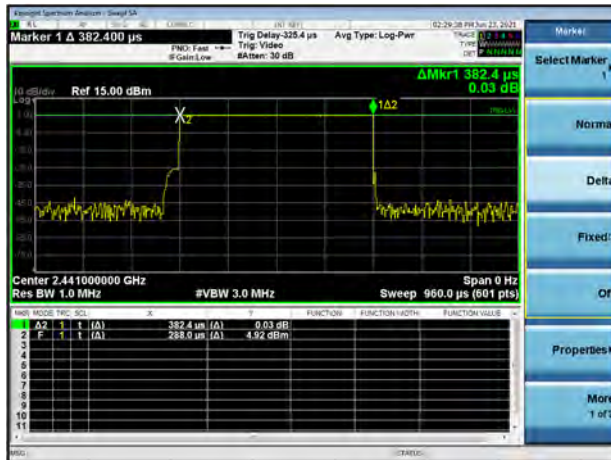


GFSK DH3

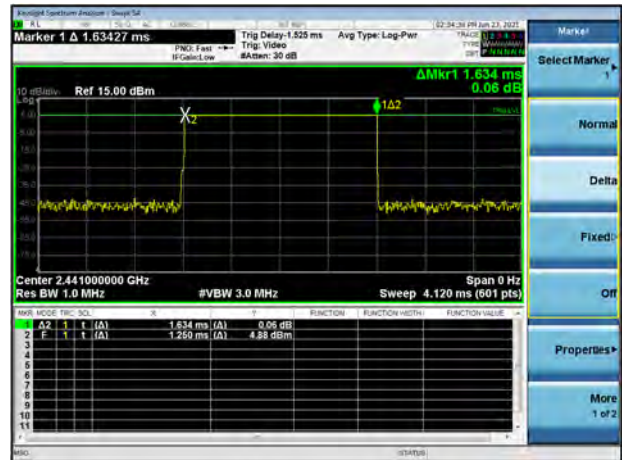


GFSK DH5

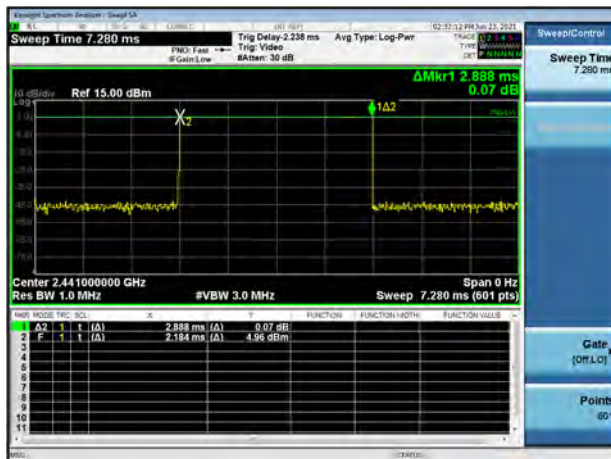


8-DPSK DH1

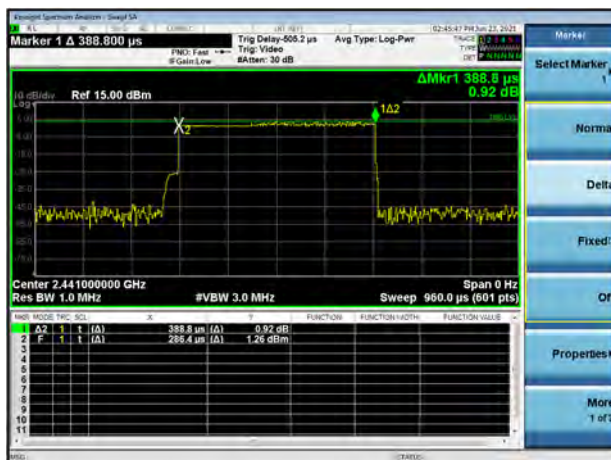


8-DPSK DH3

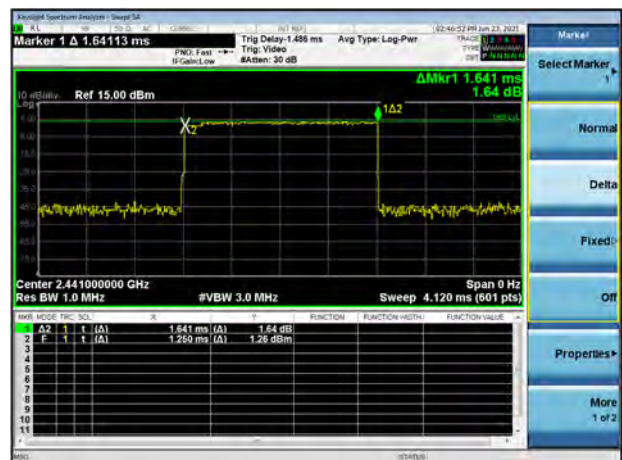


8-DPSK DH5

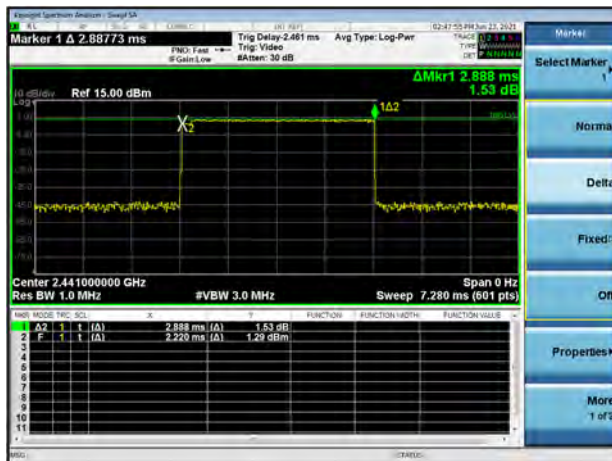


AFH Mode DH1

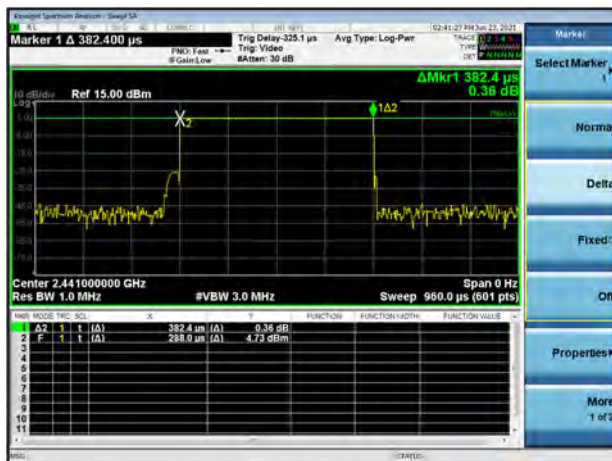

AFH Mode DH3

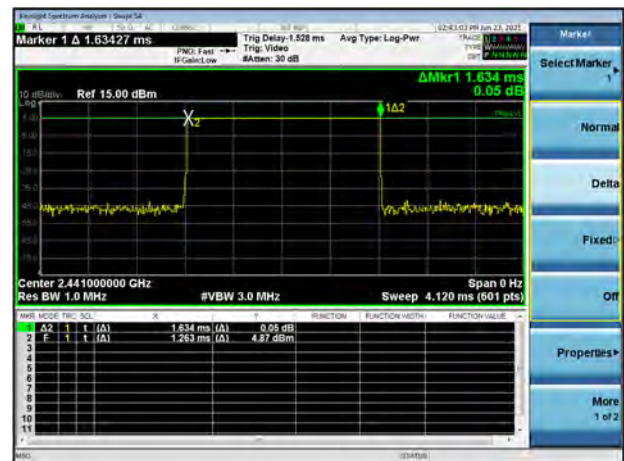


AFH Mode DH5

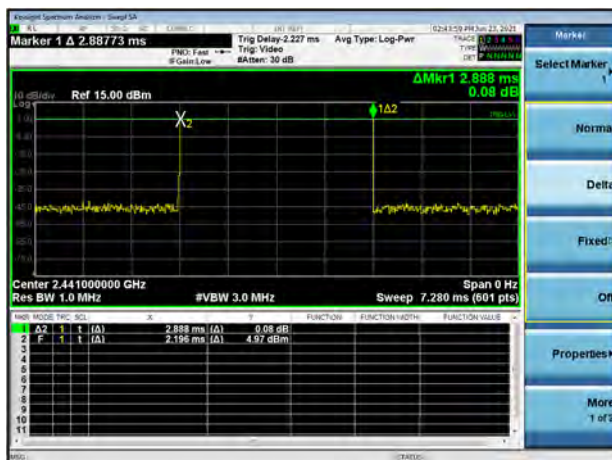


ESP module


GFSK DH1

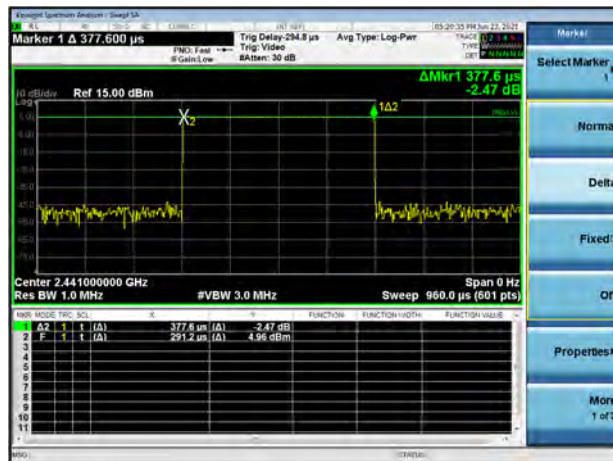


GFSK DH3

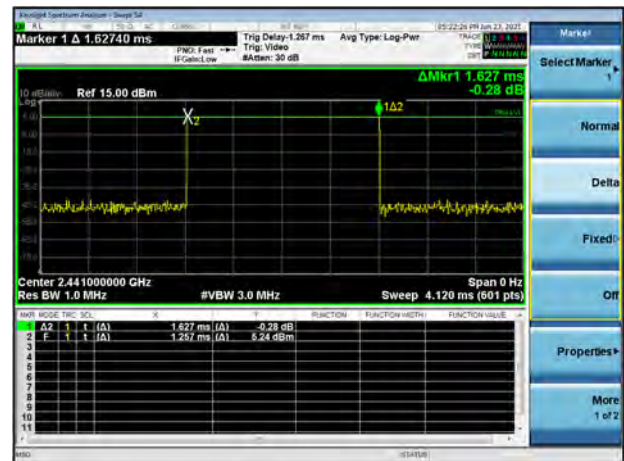


GFSK DH5

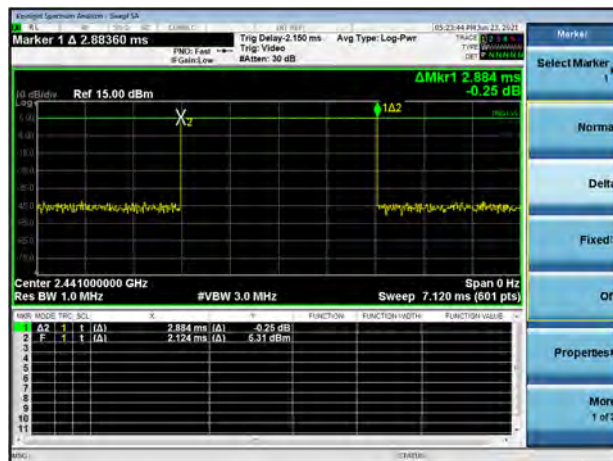


8-DPSK DH1

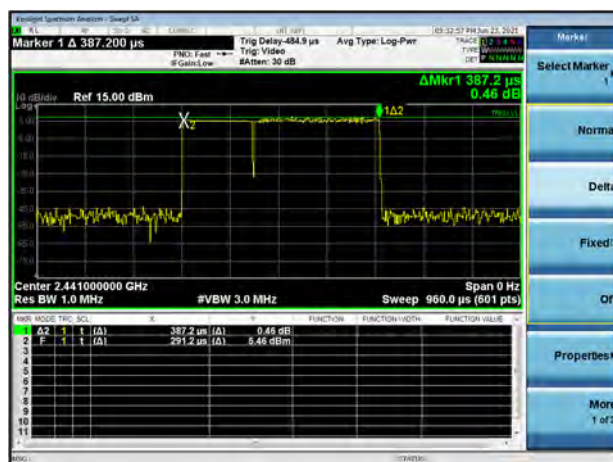


8-DPSK DH3

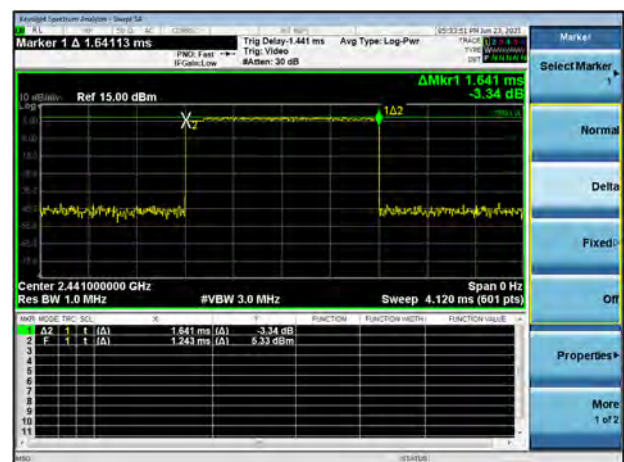


8-DPSK DH5

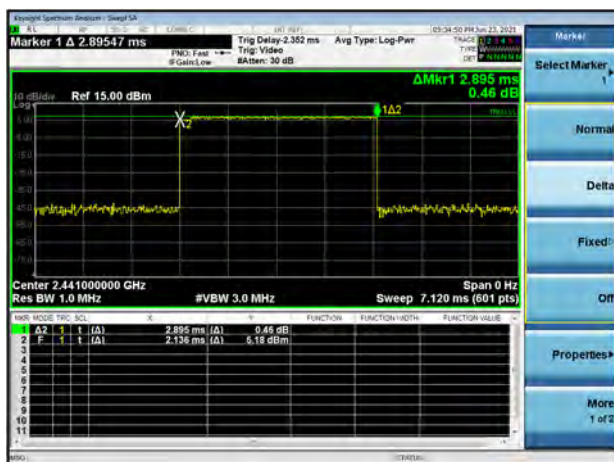


AFH Mode DH1

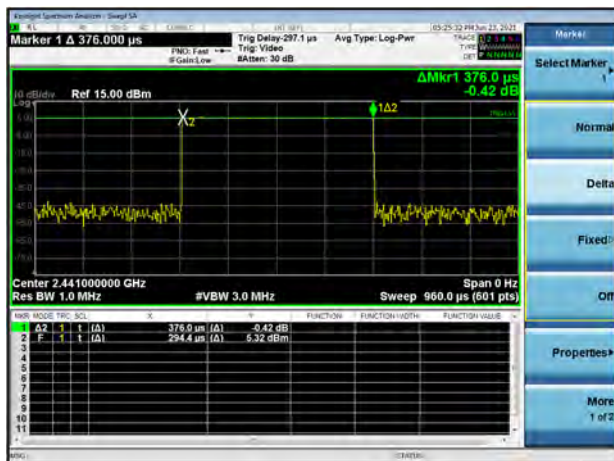

AFH Mode DH3

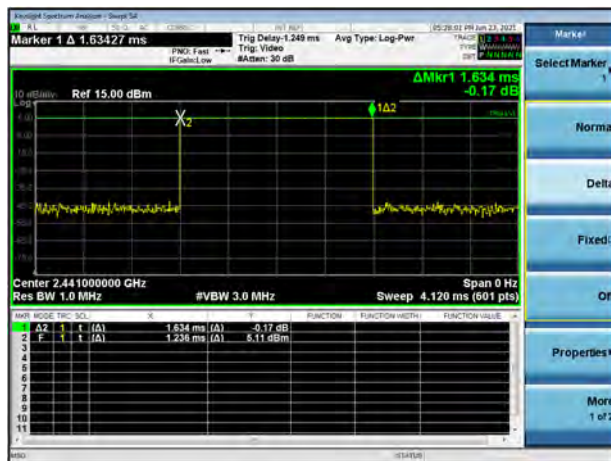

AFH Mode DH5

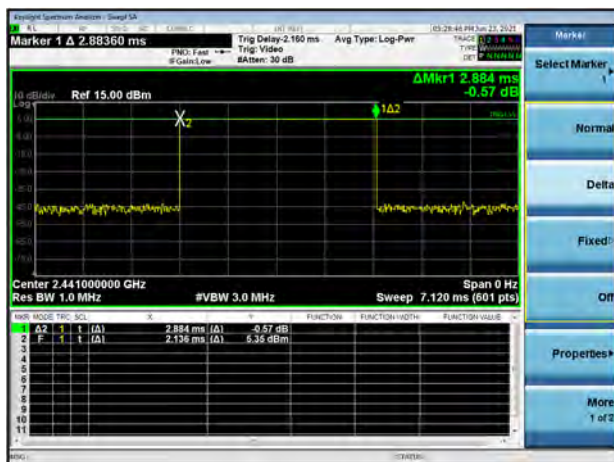

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

AP module

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.80	5.51	-14.49	Pass
Middle	-34.98	5.15	-14.85	Pass
High	-36.30	3.76	-16.24	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.66	1.31	-18.69	Pass
Middle	-36.08	1.14	-18.86	Pass
High	-35.27	0.21	-19.79	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-35.62	5.78	-14.22	Pass
8-DPSK	-35.16	1.91	-18.09	Pass

ESP module

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.04	4.17	-15.84	Pass
Middle	-35.43	4.96	-15.04	Pass
High	-36.40	5.19	-14.81	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.46	4.10	-15.90	Pass
Middle	-36.52	5.10	-14.90	Pass
High	-34.48	5.23	-14.77	Pass

Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.04	5.39	-14.61	Pass
8-DPSK	-35.62	5.42	-14.58	Pass

Test Plots

AP module


GFSK LOW CHANNEL, CARRIER LEVEL



GFSK LOW CHANNEL, BAND EDGE




GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

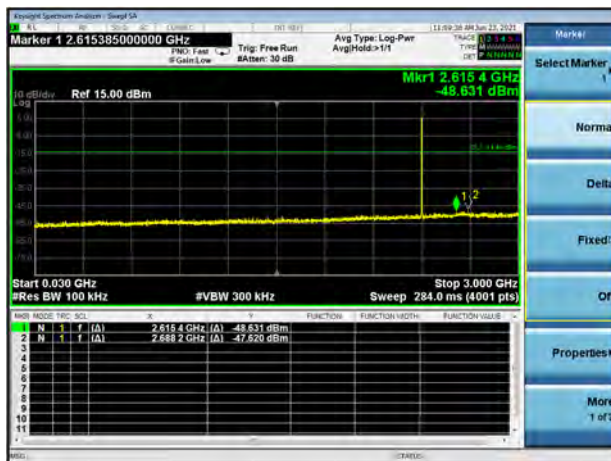


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




GFSK MIDDLE CHANNEL, CARRIER LEVEL

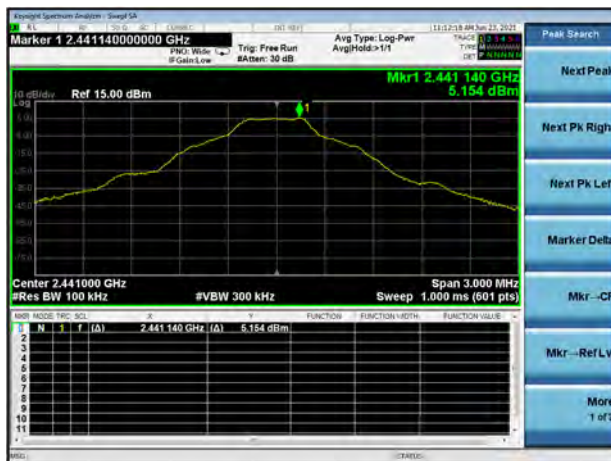

GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

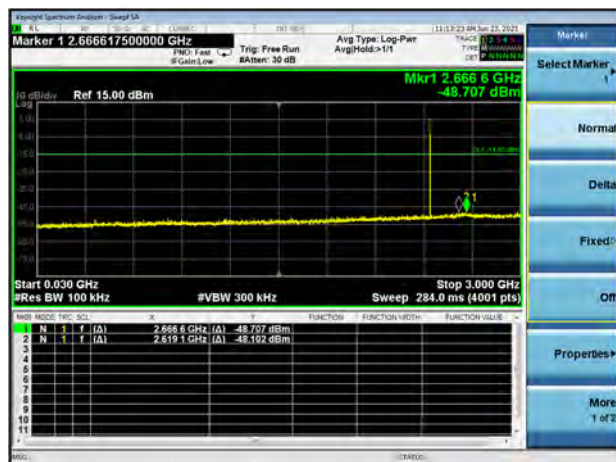


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

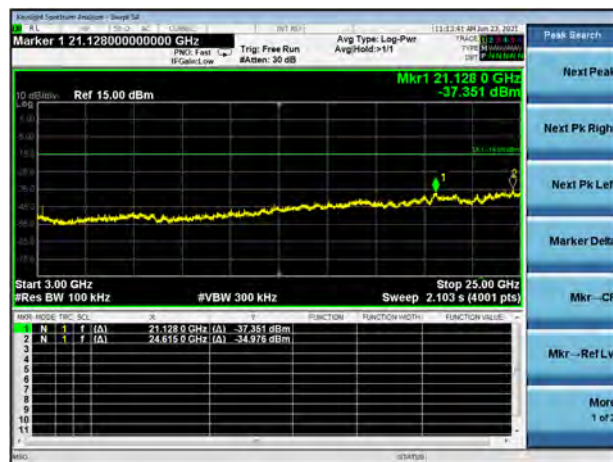


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE

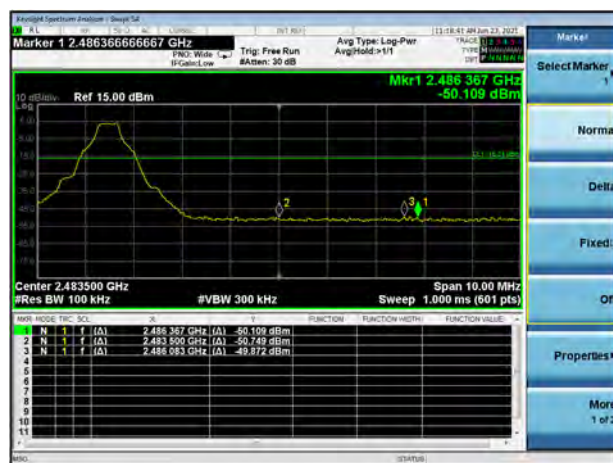


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

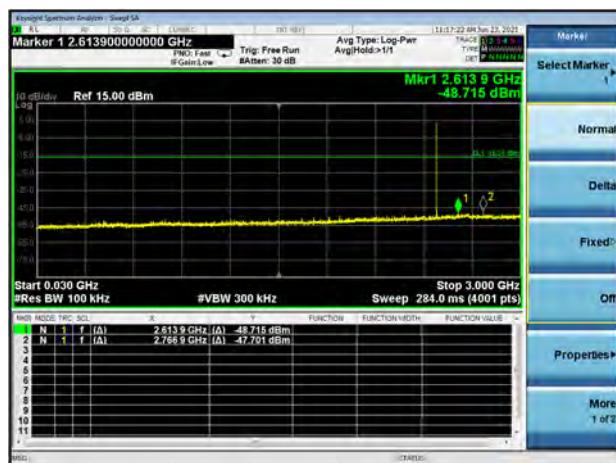

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

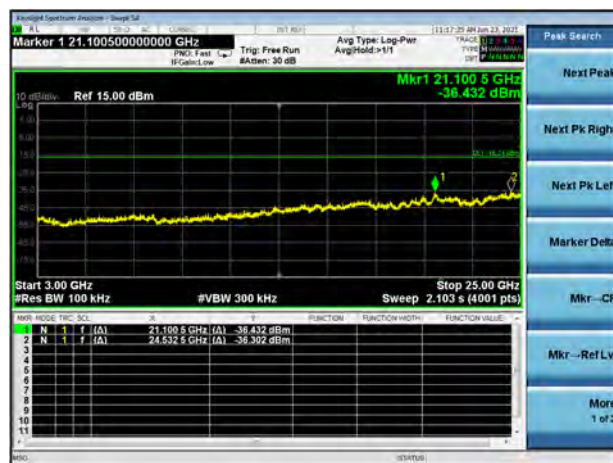


8-DPSK LOW CHANNEL, CARRIER LEVEL

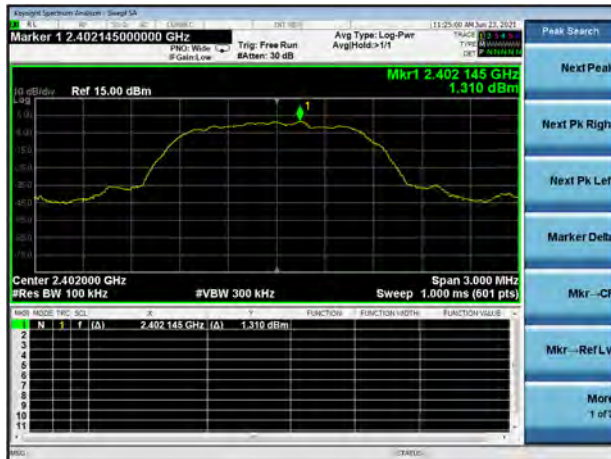


8-DPSK LOW CHANNEL, BAND EDGE




8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

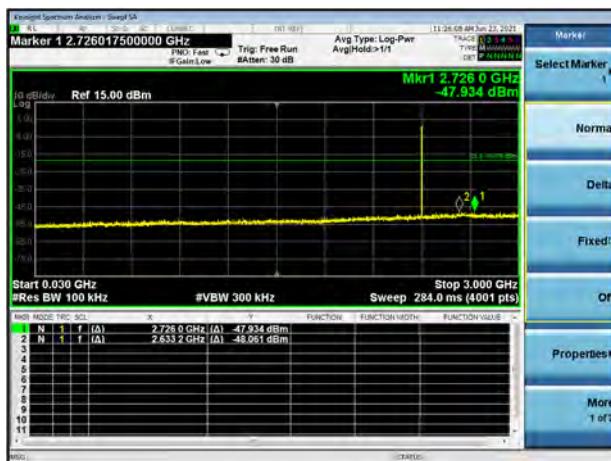


8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

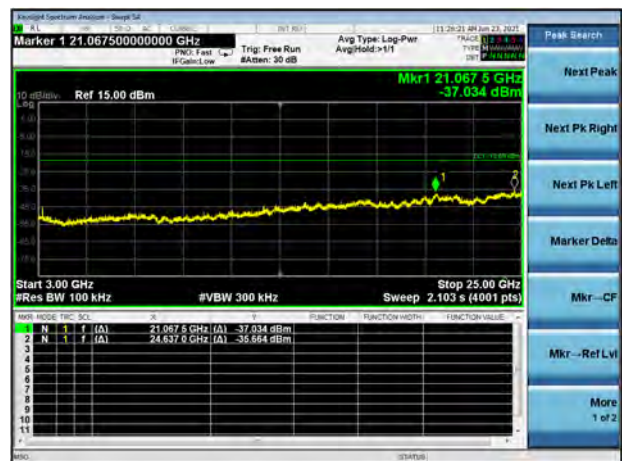

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

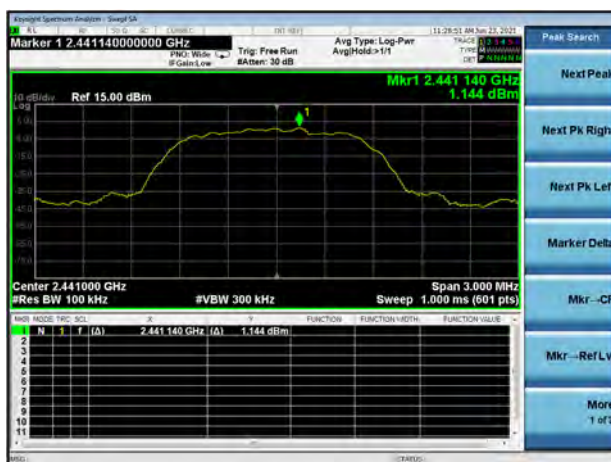


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

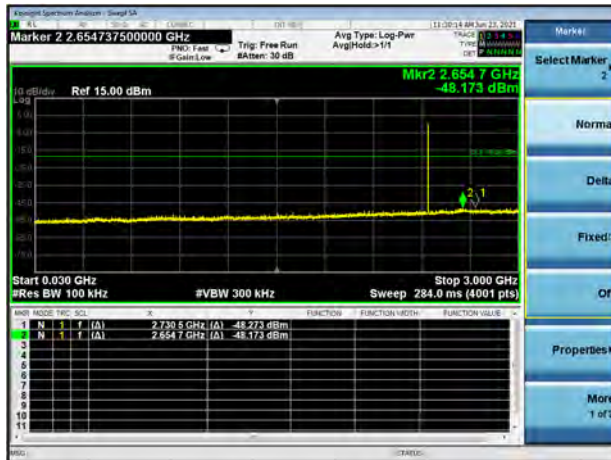


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




8-DPSK HIGH CHANNEL, CARRIER LEVEL

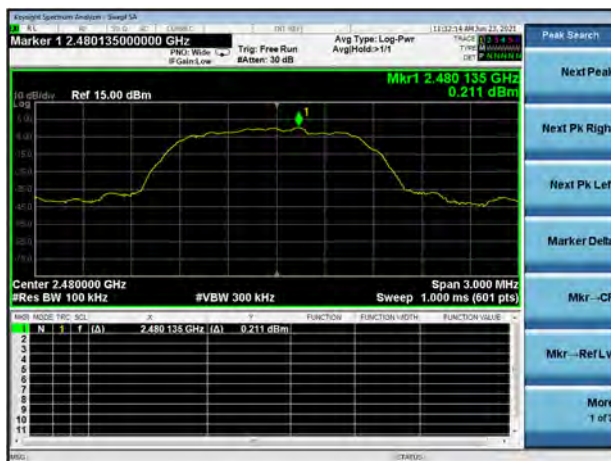

8-DPSK HIGH CHANNEL, BAND EDGE

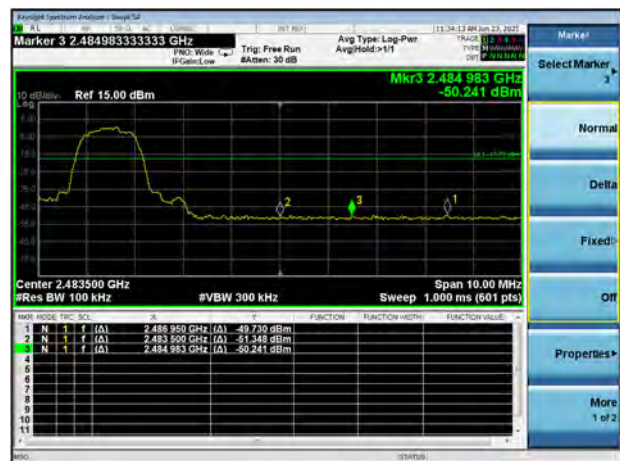


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

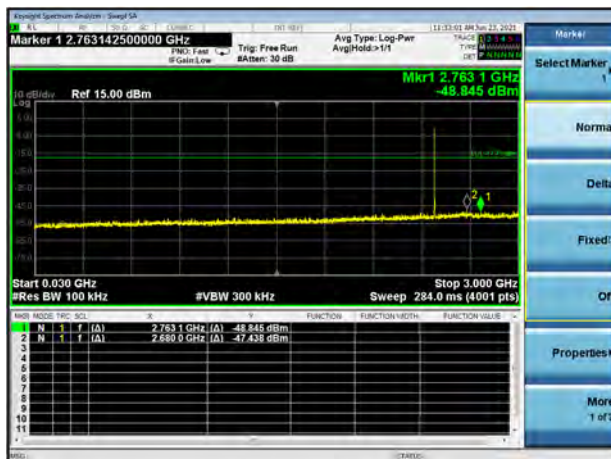

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




GFSK HOPPING, CARRIER LEVEL

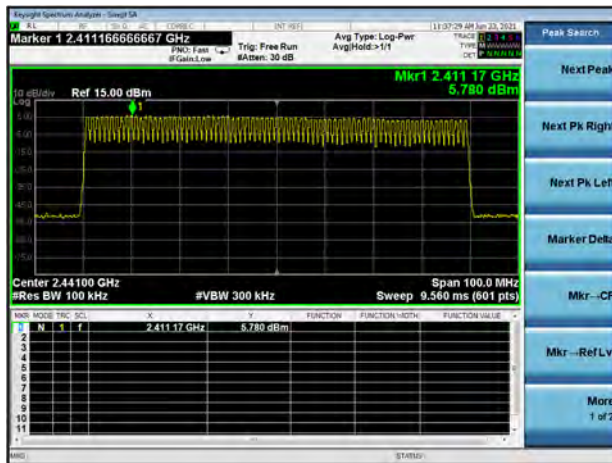


GFSK HOPPING BAND EDGE (LOW)




GFSK HOPPING BAND EDGE (HIGH)

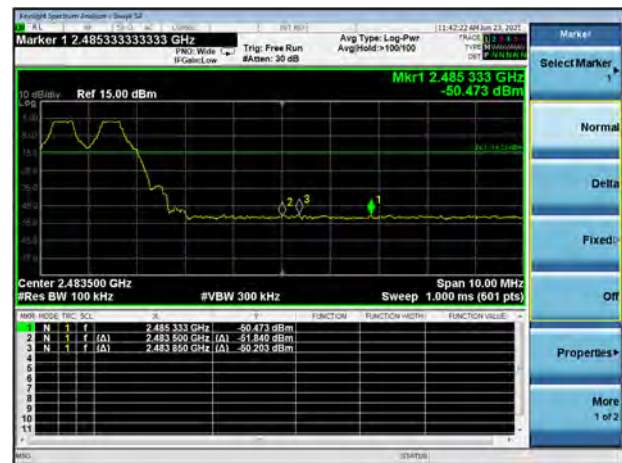


GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

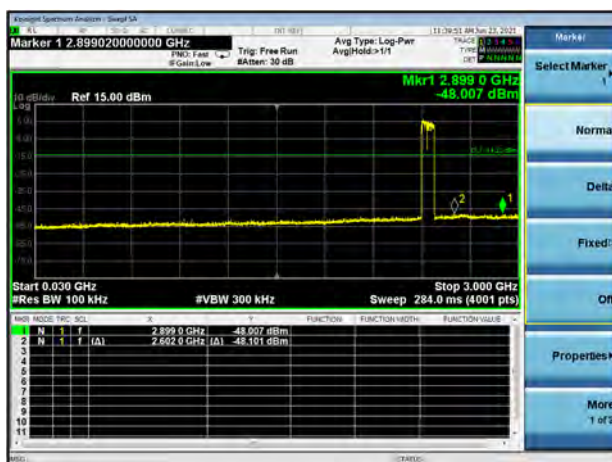

GFSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

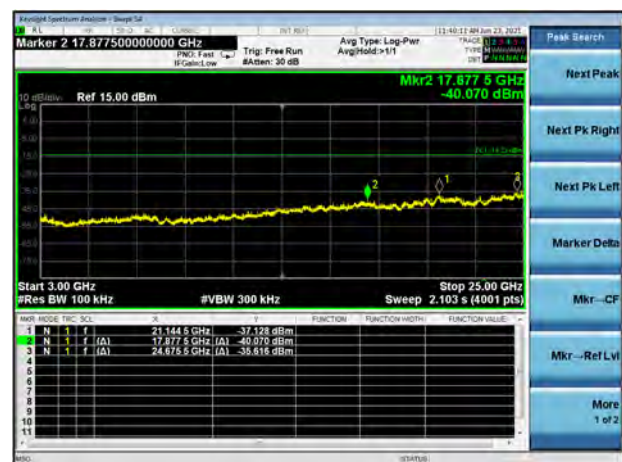


8-DPSK HOPPING, CARRIER LEVEL

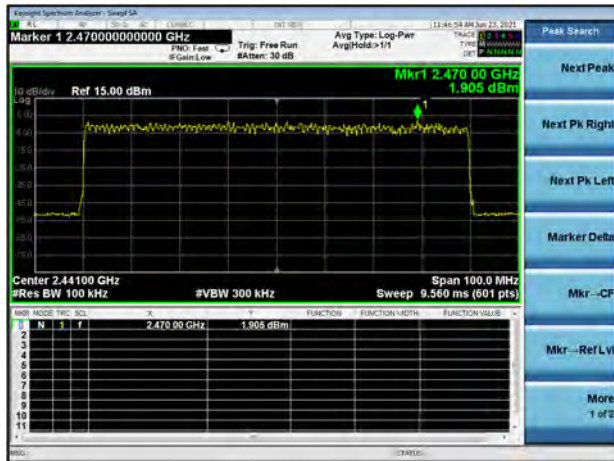


8-DPSK Hopping BAND EDGE (LOW)




8-DPSK Hopping BAND EDGE (HIGH)

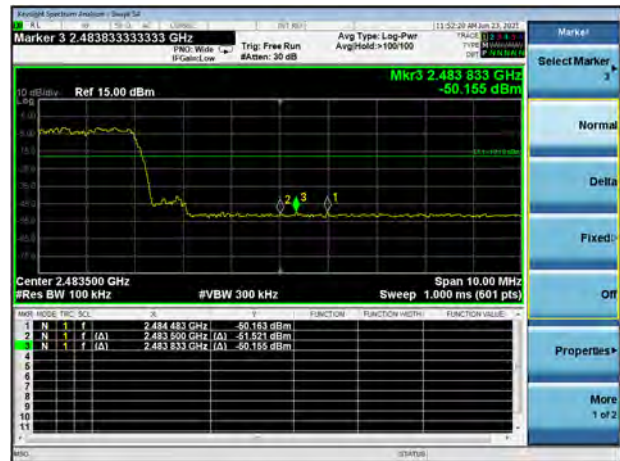

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

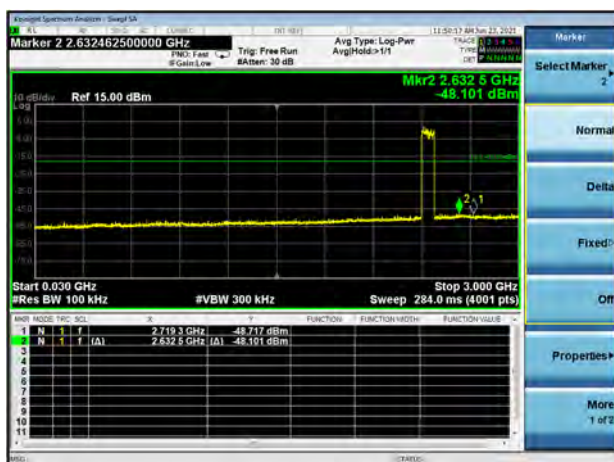

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

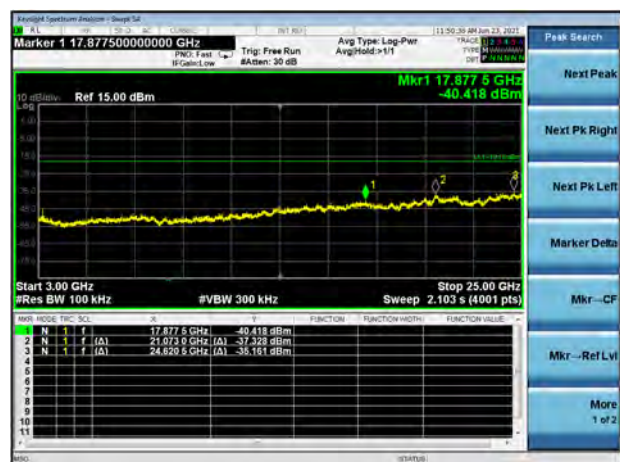


ESP module

GFSK LOW CHANNEL, CARRIER LEVEL



GFSK LOW CHANNEL, BAND EDGE

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

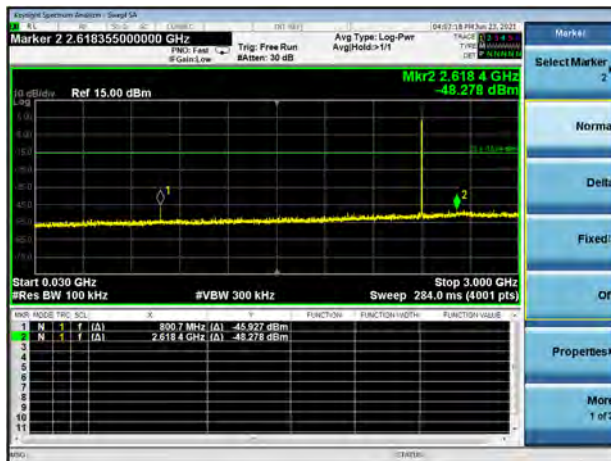


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

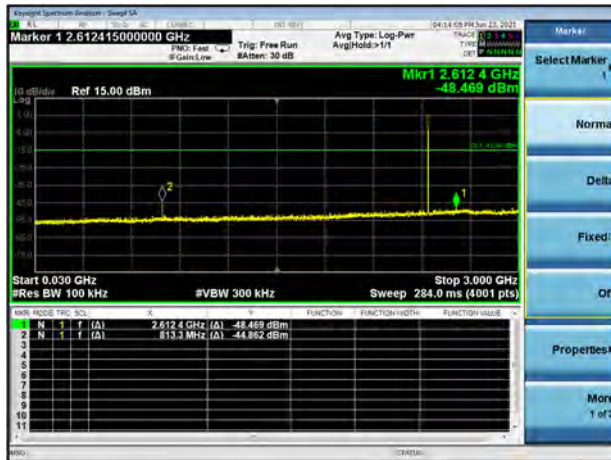

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE



GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

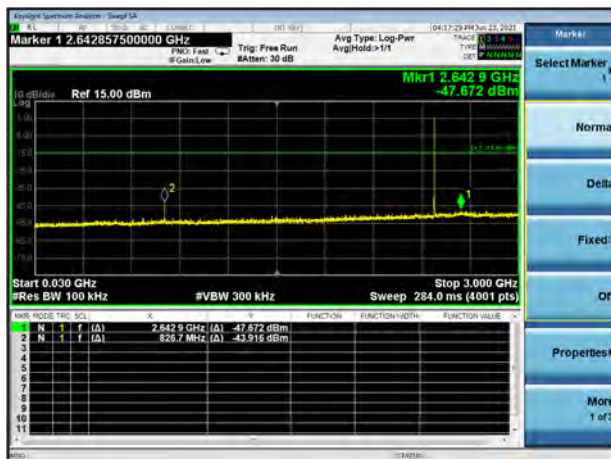

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

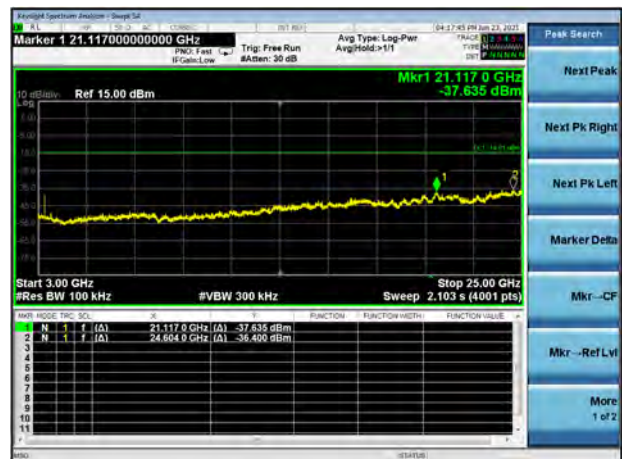


8-DPSK LOW CHANNEL, CARRIER LEVEL




8-DPSK LOW CHANNEL, BAND EDGE



8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

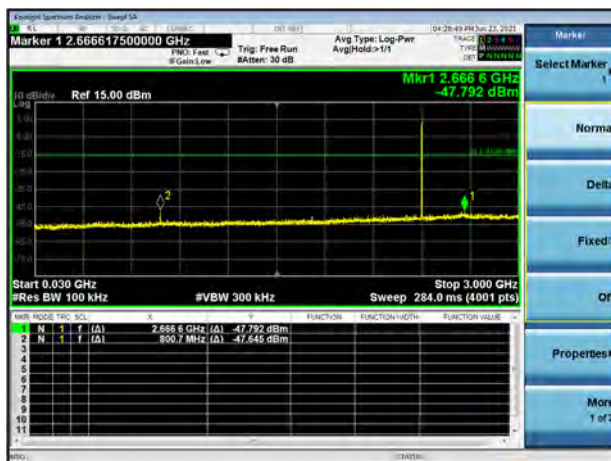


8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

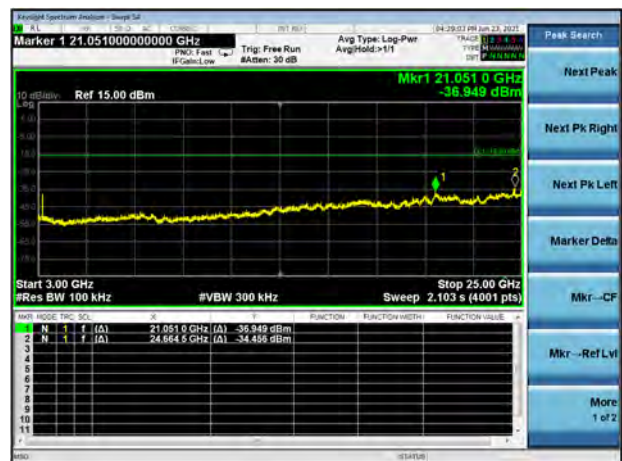

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL



8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

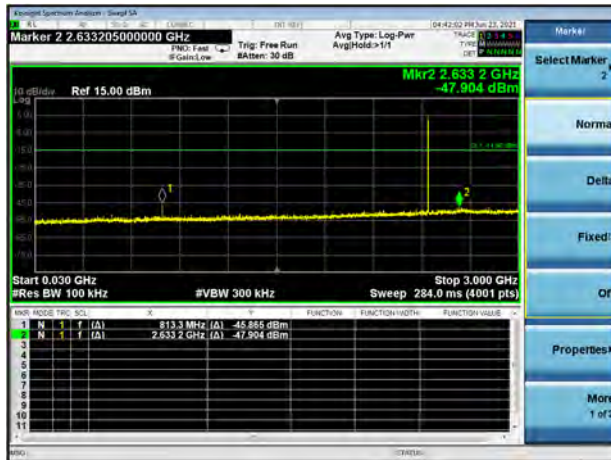

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




8-DPSK HIGH CHANNEL, CARRIER LEVEL



8-DPSK HIGH CHANNEL, BAND EDGE




8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

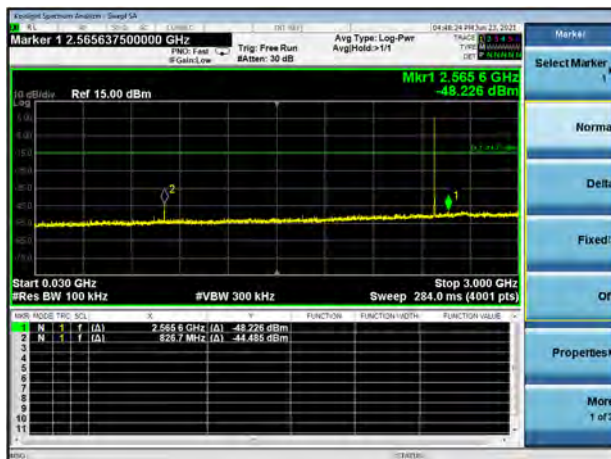

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK HOPPING, CARRIER LEVEL

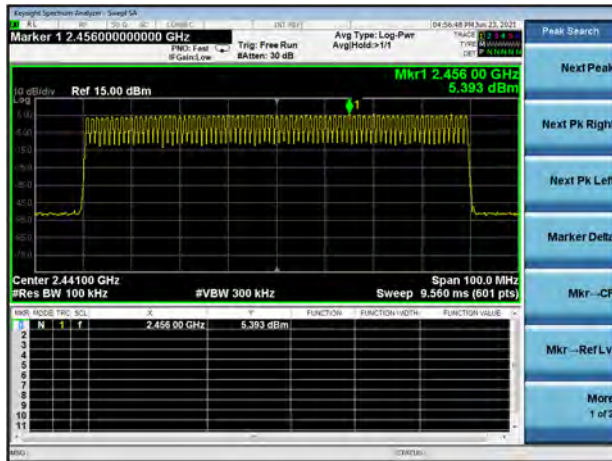


GFSK HOPPING BAND EDGE (LOW)


GFSK HOPPING BAND EDGE (HIGH)

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

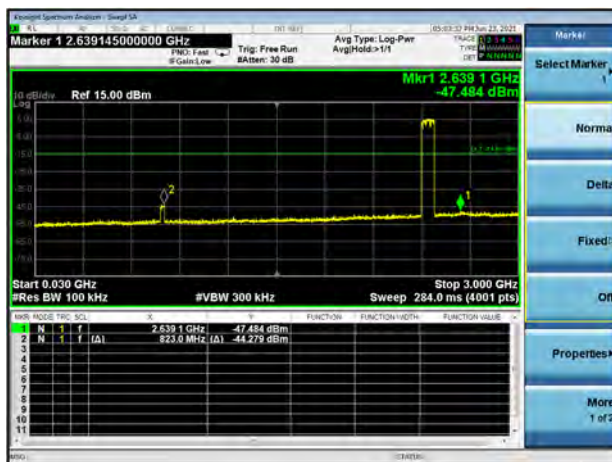

8-DPSK HOPPING, CARRIER LEVEL

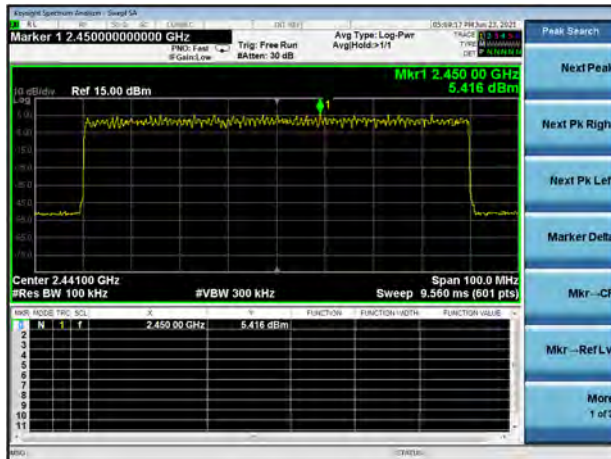


8-DPSK Hopping BAND EDGE (LOW)

8-DPSK Hopping BAND EDGE (HIGH)

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

8-DPSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

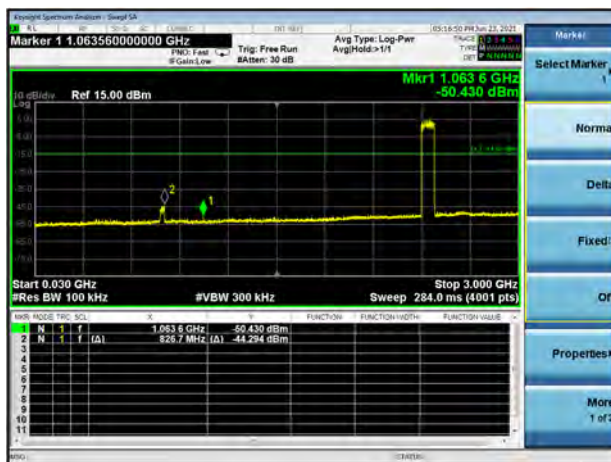

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.
 Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

AP module

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

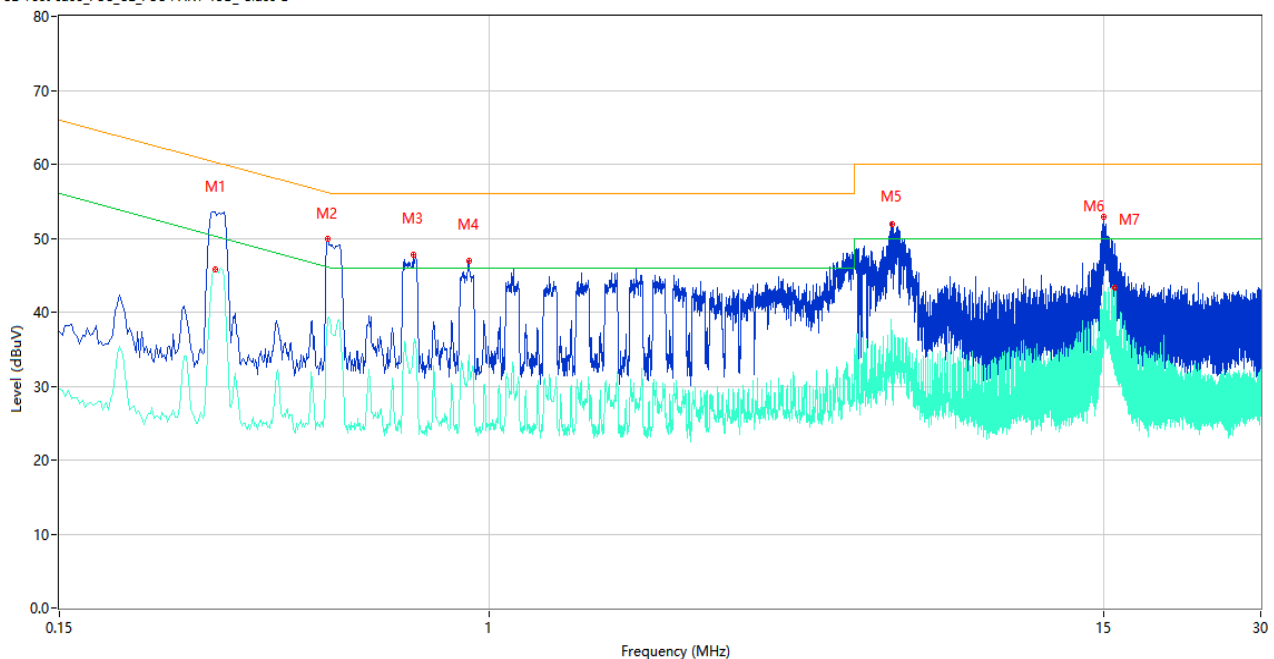

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.298	53.50	10.33	60.30	-6.80	Peak	L	Pass
1**	0.298	45.75	10.33	50.30	-4.55	AV	L	Pass
2	0.490	49.90	10.29	56.17	-6.27	Peak	L	Pass
2**	0.490	38.98	10.29	46.17	-7.19	AV	L	Pass
3	0.716	47.70	10.27	56.00	-8.30	Peak	L	Pass
3**	0.716	35.80	10.27	46.00	-10.20	AV	L	Pass
4	0.912	46.91	10.24	56.00	-9.09	Peak	L	Pass
4**	0.912	34.28	10.24	46.00	-11.72	AV	L	Pass
5	5.892	51.92	10.32	60.00	-8.08	Peak	L	Pass
5**	5.892	37.46	10.32	50.00	-12.54	AV	L	Pass
6	15.048	52.94	10.41	60.00	-7.06	Peak	L	Pass
6**	15.048	38.38	10.41	50.00	-11.62	AV	L	Pass
7	15.732	48.53	10.42	60.00	-11.47	Peak	L	Pass
7**	15.732	43.25	10.42	50.00	-6.75	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

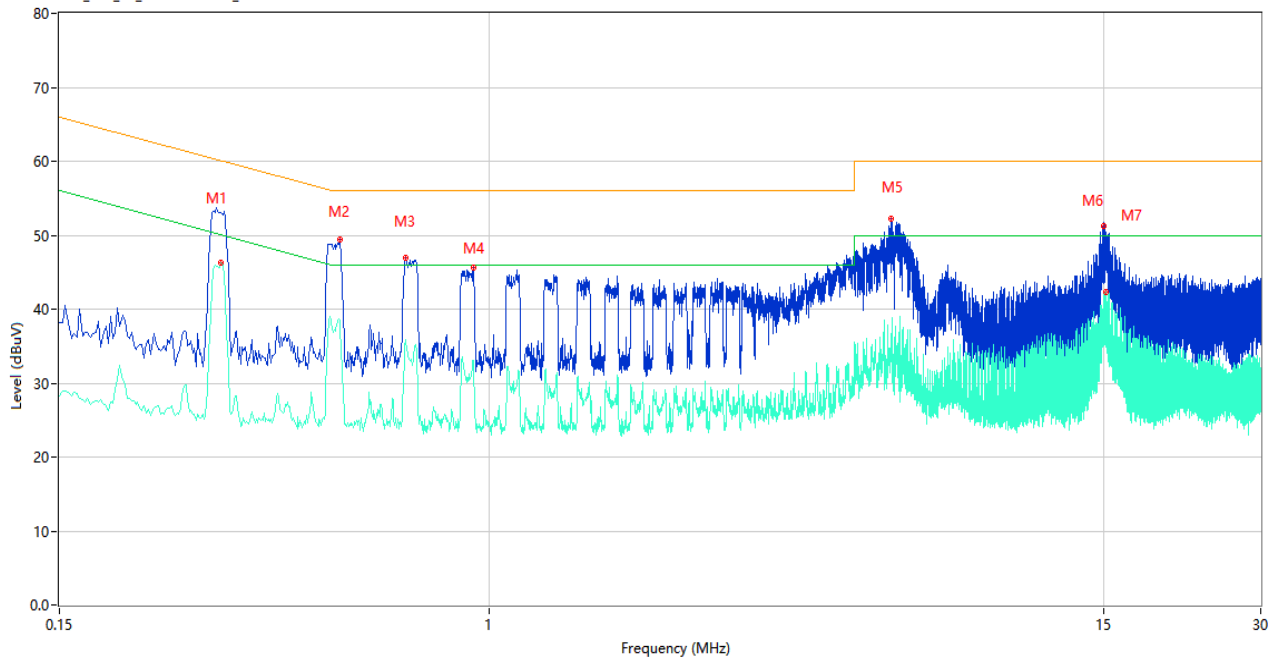


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.306	53.09	10.33	60.08	-6.99	Peak	N	Pass
1**	0.306	46.22	10.33	50.08	-3.86	AV	N	Pass
2	0.516	49.50	10.30	56.00	-6.50	Peak	N	Pass
2**	0.516	38.49	10.30	46.00	-7.51	AV	N	Pass
3	0.692	46.98	10.27	56.00	-9.02	Peak	N	Pass
3**	0.692	35.49	10.27	46.00	-10.51	AV	N	Pass
4	0.932	45.60	10.24	56.00	-10.40	Peak	N	Pass
4**	0.932	32.61	10.24	46.00	-13.39	AV	N	Pass
5	5.880	52.21	10.32	60.00	-7.79	Peak	N	Pass
5**	5.880	34.29	10.32	50.00	-15.71	AV	N	Pass
6	15.026	51.27	10.41	60.00	-8.73	Peak	N	Pass
6**	15.026	38.97	10.41	50.00	-11.03	AV	N	Pass
7	15.194	49.28	10.41	60.00	-10.72	Peak	N	Pass
7**	15.194	42.31	10.41	50.00	-7.69	AV	N	Pass

ESP module

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

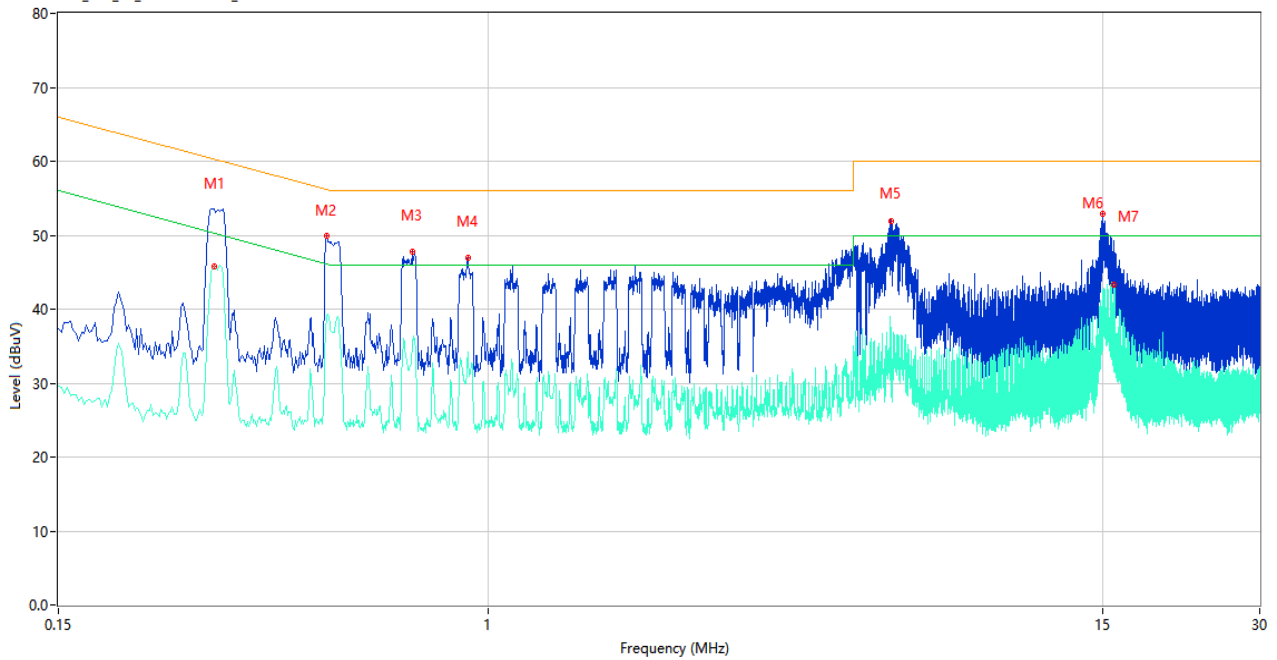

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.298	53.50	10.33	60.30	-6.80	Peak	L	Pass
1**	0.298	45.75	10.33	50.30	-4.55	AV	L	Pass
2	0.490	49.90	10.29	56.17	-6.27	Peak	L	Pass
2**	0.490	38.98	10.29	46.17	-7.19	AV	L	Pass
3	0.716	47.70	10.27	56.00	-8.30	Peak	L	Pass
3**	0.716	35.80	10.27	46.00	-10.20	AV	L	Pass
4	0.912	46.91	10.24	56.00	-9.09	Peak	L	Pass
4**	0.912	34.28	10.24	46.00	-11.72	AV	L	Pass
5	5.892	51.92	10.32	60.00	-8.08	Peak	L	Pass
5**	5.892	37.46	10.32	50.00	-12.54	AV	L	Pass
6	15.048	52.94	10.41	60.00	-7.06	Peak	L	Pass
6**	15.048	38.38	10.41	50.00	-11.62	AV	L	Pass
7	15.732	48.53	10.42	60.00	-11.47	Peak	L	Pass
7**	15.732	43.25	10.42	50.00	-6.75	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

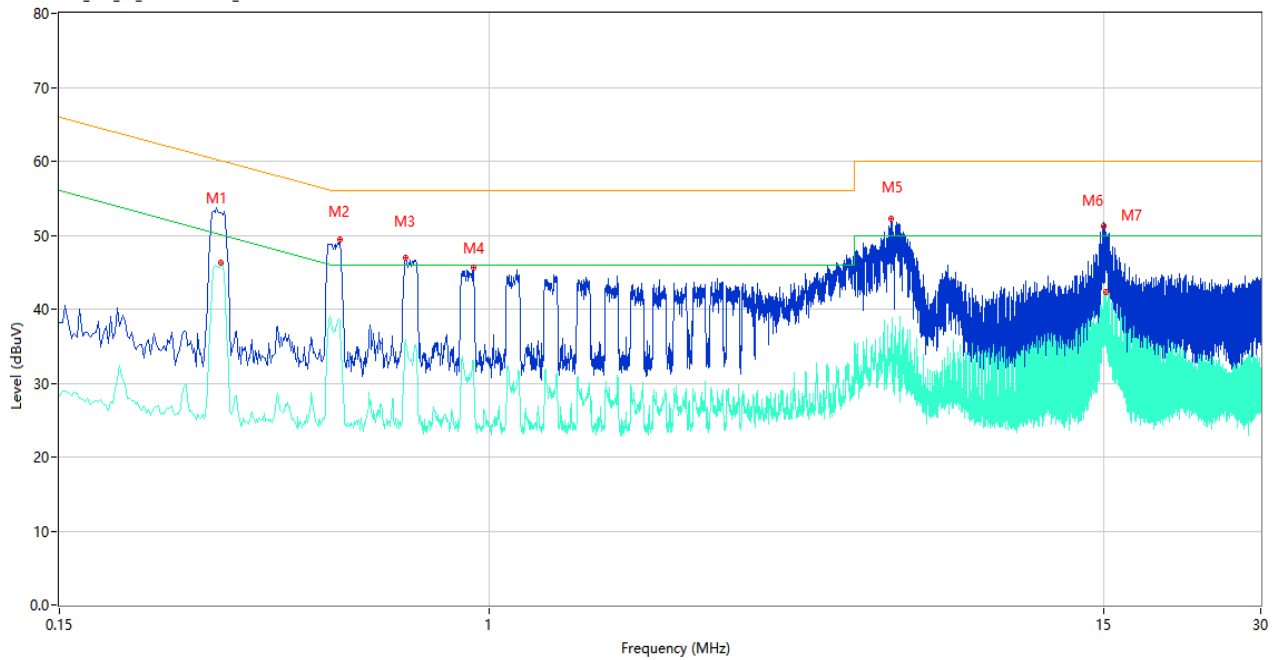

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.306	53.09	10.33	60.08	-6.99	Peak	N	Pass
1**	0.306	46.22	10.33	50.08	-3.86	AV	N	Pass
2	0.516	49.50	10.30	56.00	-6.50	Peak	N	Pass
2**	0.516	38.49	10.30	46.00	-7.51	AV	N	Pass
3	0.692	46.98	10.27	56.00	-9.02	Peak	N	Pass
3**	0.692	35.49	10.27	46.00	-10.51	AV	N	Pass
4	0.932	45.60	10.24	56.00	-10.40	Peak	N	Pass
4**	0.932	32.61	10.24	46.00	-13.39	AV	N	Pass
5	5.880	52.21	10.32	60.00	-7.79	Peak	N	Pass
5**	5.880	34.29	10.32	50.00	-15.71	AV	N	Pass
6	15.026	51.27	10.41	60.00	-8.73	Peak	N	Pass
6**	15.026	38.97	10.41	50.00	-11.03	AV	N	Pass
7	15.194	49.28	10.41	60.00	-10.72	Peak	N	Pass
7**	15.194	42.31	10.41	50.00	-7.69	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


AP module

30 MHz to 1 GHz, ANT H

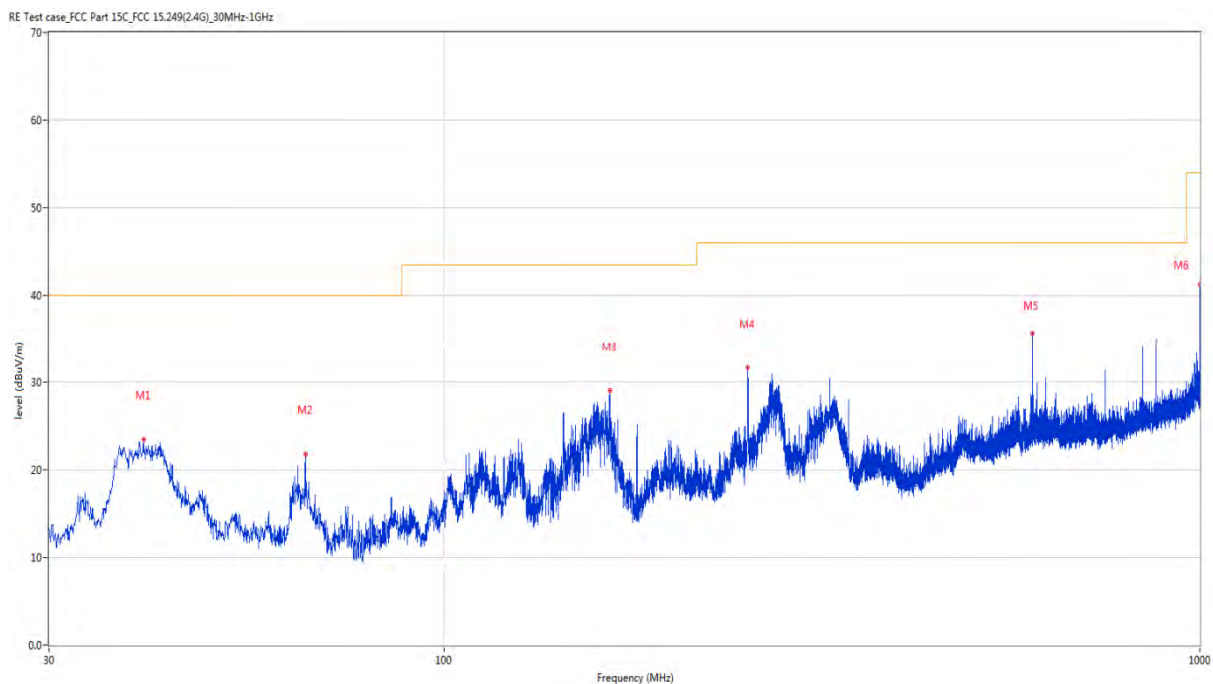

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.991	23.50	-24.17	40.0	-16.50	Peak	245.20	200	Horizontal	Pass
2	65.502	21.83	-25.08	40.0	-18.17	Peak	344.40	100	Horizontal	Pass
3	165.557	29.06	-26.74	43.5	-14.44	Peak	98.10	100	Horizontal	Pass
4	252.178	31.73	-22.80	46.0	-14.27	Peak	98.10	100	Horizontal	Pass
5	600.020	35.73	-14.57	46.0	-10.27	Peak	361.00	200	Horizontal	Pass
6	1000.000	41.27	-9.26	54.0	-12.73	Peak	276.10	100	Horizontal	Pass


30 MHz to 1 GHz, ANT V

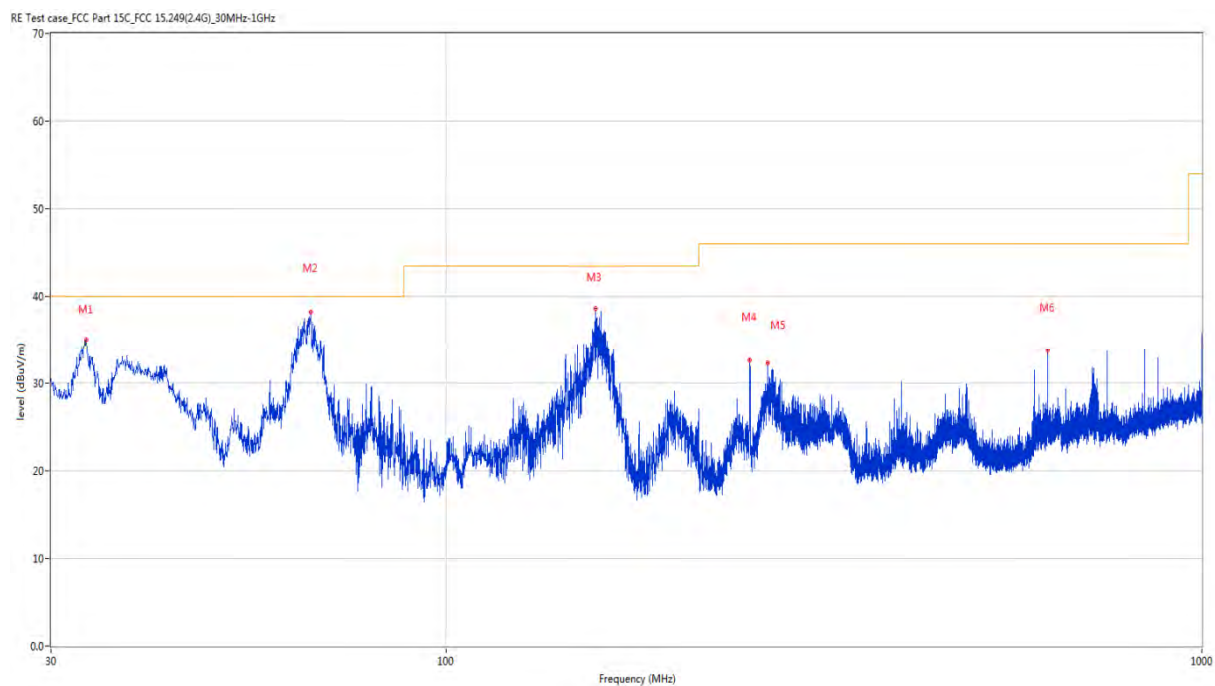

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.395	35.02	-26.23	40.0	-4.98	Peak	310.20	100	Vertical	Pass
2	66.132	38.16	-25.16	40.0	-1.84	Peak	258.60	100	Vertical	Pass
3	157.604	38.61	-27.63	43.5	-4.89	Peak	165.80	100	Vertical	Pass
4	252.324	32.60	-22.79	46.0	-13.40	Peak	201.80	200	Vertical	Pass
5	266.486	32.33	-22.29	46.0	-13.67	Peak	178.20	100	Vertical	Pass
6	625.047	33.79	-13.50	46.0	-12.21	Peak	360.00	200	Vertical	Pass


ESP module

30 MHz to 1 GHz, ANT H

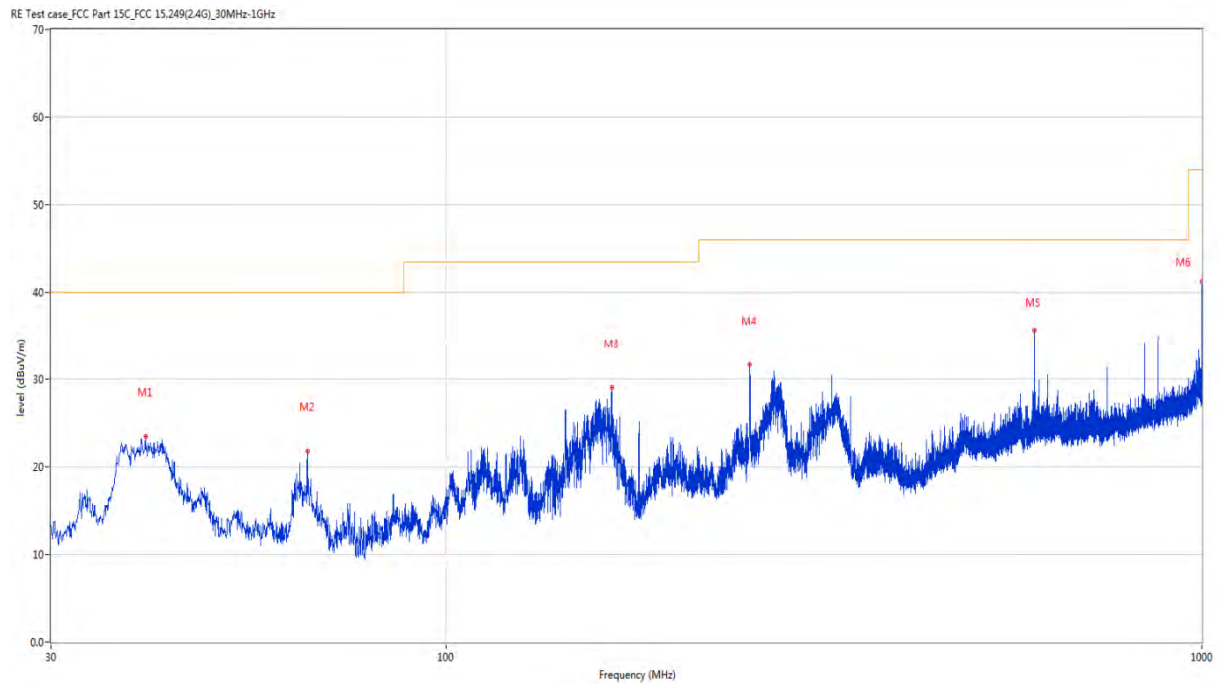

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.991	23.50	-24.17	40.0	-16.50	Peak	245.20	200	Horizontal	Pass
2	65.502	21.83	-25.08	40.0	-18.17	Peak	344.40	100	Horizontal	Pass
3	165.557	29.06	-26.74	43.5	-14.44	Peak	98.10	100	Horizontal	Pass
4	252.178	31.73	-22.80	46.0	-14.27	Peak	98.10	100	Horizontal	Pass
5	600.020	35.73	-14.57	46.0	-10.27	Peak	361.00	200	Horizontal	Pass
6	1000.000	41.27	-9.26	54.0	-12.73	Peak	276.10	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

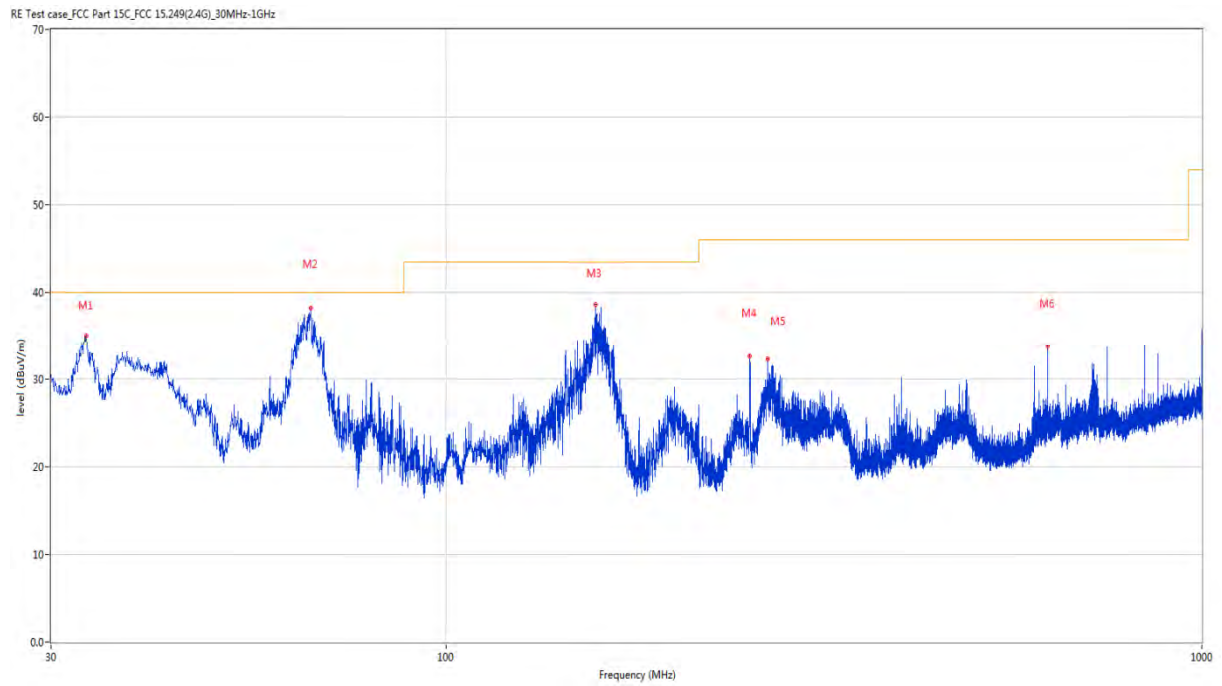

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.395	35.02	-26.23	40.0	-4.98	Peak	310.20	100	Vertical	Pass
2	66.132	38.16	-25.16	40.0	-1.84	Peak	258.60	100	Vertical	Pass
3	157.604	38.61	-27.63	43.5	-4.89	Peak	165.80	100	Vertical	Pass
4	252.324	32.60	-22.79	46.0	-13.40	Peak	201.80	200	Vertical	Pass
5	266.486	32.33	-22.29	46.0	-13.67	Peak	178.20	100	Vertical	Pass
6	625.047	33.79	-13.50	46.0	-12.21	Peak	360.00	200	Vertical	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

Note 3: All spurious emissions are tested both vertically and horizontally and only the worst orientation are recorded in this test report.

AP module


GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

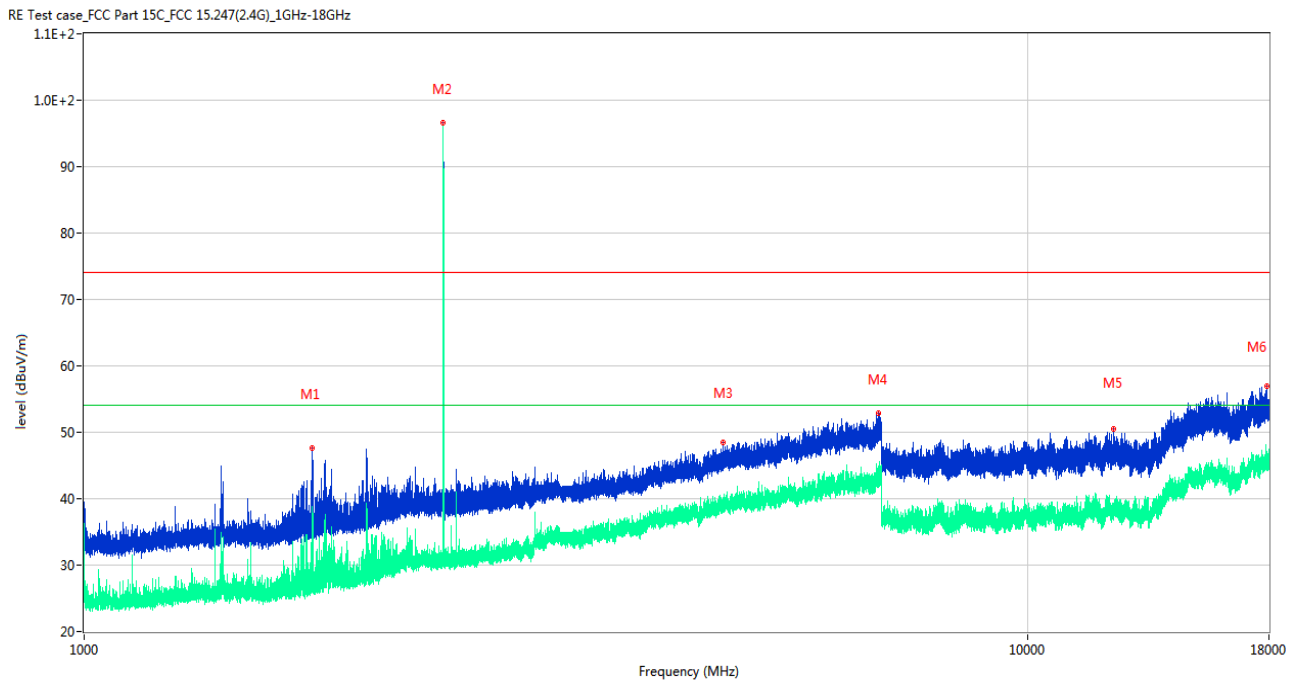

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1744.600	47.67	-14.92	74.0	-26.33	Peak	204.00	150	Horizontal	Pass
1**	1744.600	32.82	-14.92	54.0	-21.18	AV	204.00	150	Horizontal	Pass
2	2401.900	96.57	-10.74	74.0	22.57	Peak	259.00	150	Horizontal	N/A
2**	2401.900	95.46	-10.74	54.0	41.46	AV	259.00	150	Horizontal	N/A
3	4751.200	48.44	-1.93	74.0	-25.56	Peak	282.00	150	Horizontal	Pass
3**	4751.200	39.11	-1.93	54.0	-14.89	AV	282.00	150	Horizontal	Pass
4	6947.000	52.96	4.32	74.0	-21.04	Peak	0.00	150	Horizontal	Pass
4**	6947.000	43.97	4.32	54.0	-10.03	AV	0.00	150	Horizontal	Pass
5	12326.799	50.48	19.88	74.0	-23.52	Peak	197.00	150	Horizontal	Pass
5**	12326.799	38.67	19.88	54.0	-15.33	AV	197.00	150	Horizontal	Pass
6	17920.463	56.90	24.47	74.0	-17.10	Peak	362.00	150	Horizontal	Pass
6**	17920.463	45.95	24.47	54.0	-8.05	AV	362.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

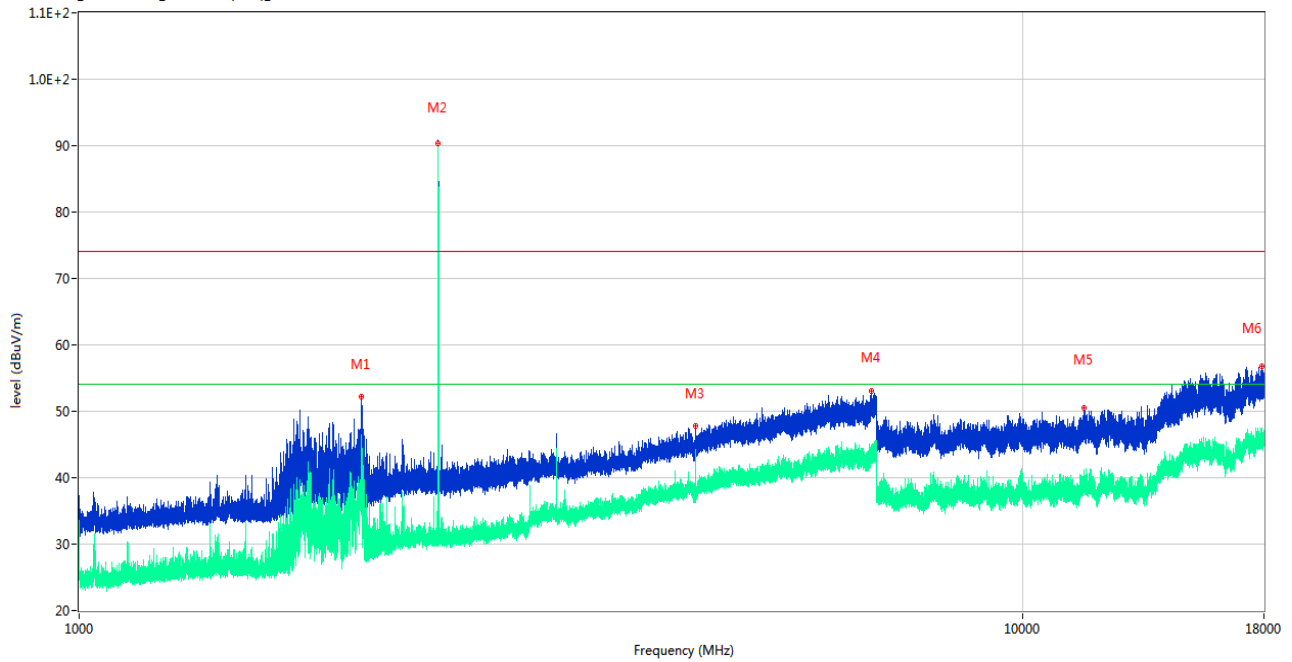

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.200	52.19	-13.44	74.0	-21.81	Peak	-2.00	150	Vertical	Pass
1**	1992.200	42.94	-13.44	54.0	-11.06	AV	-2.00	150	Vertical	Pass
2	2402.200	90.78	-10.73	74.0	16.78	Peak	69.00	150	Vertical	N/A
2**	2402.200	90.03	-10.73	54.0	36.03	AV	69.00	150	Vertical	N/A
3	4500.000	47.72	-2.62	74.0	-26.28	Peak	213.00	150	Vertical	Pass
3**	4500.000	44.20	-2.62	54.0	-9.80	AV	213.00	150	Vertical	Pass
4	6903.200	53.13	4.57	74.0	-20.87	Peak	185.00	150	Vertical	Pass
4**	6903.200	43.30	4.57	54.0	-10.70	AV	185.00	150	Vertical	Pass
5	11610.350	50.48	20.19	74.0	-23.52	Peak	-2.00	150	Vertical	Pass
5**	11610.350	39.37	20.19	54.0	-14.63	AV	-2.00	150	Vertical	Pass
6	17912.324	56.83	24.51	74.0	-17.17	Peak	228.00	150	Vertical	Pass
6**	17912.324	46.46	24.51	54.0	-7.54	AV	228.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

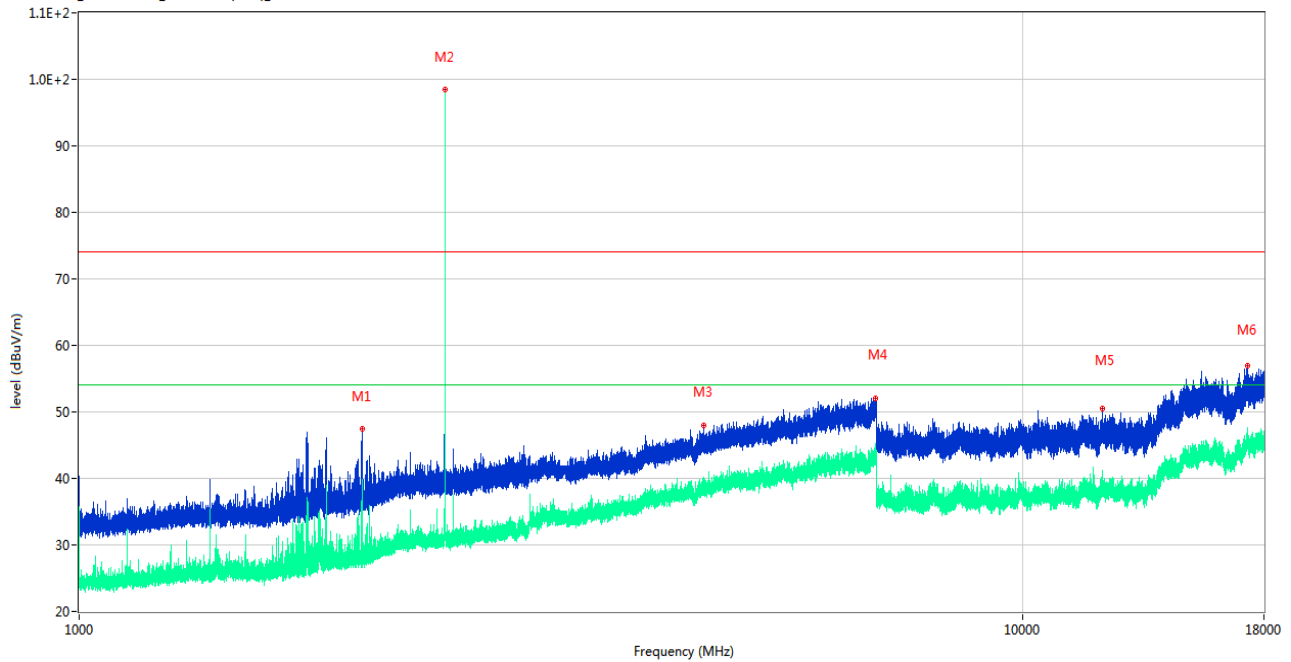

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1993.900	47.38	-13.43	74.0	-26.62	Peak	188.00	150	Horizontal	Pass
1**	1993.900	29.57	-13.43	54.0	-24.43	AV	188.00	150	Horizontal	Pass
2	2440.800	98.44	-10.52	74.0	24.44	Peak	246.00	150	Horizontal	N/A
2**	2440.800	97.31	-10.52	54.0	43.31	AV	246.00	150	Horizontal	N/A
3	4586.800	47.89	-2.36	74.0	-26.11	Peak	136.00	150	Horizontal	Pass
3**	4586.800	37.94	-2.36	54.0	-16.06	AV	136.00	150	Horizontal	Pass
4	6974.800	52.06	5.18	74.0	-21.94	Peak	0.00	150	Horizontal	Pass
4**	6974.800	42.61	5.18	54.0	-11.39	AV	0.00	150	Horizontal	Pass
5	12147.112	50.55	19.90	74.0	-23.45	Peak	47.00	150	Horizontal	Pass
5**	12147.112	38.39	19.90	54.0	-15.61	AV	47.00	150	Horizontal	Pass
6	17298.864	56.96	24.59	74.0	-17.04	Peak	362.00	150	Horizontal	Pass
6**	17298.864	45.45	24.59	54.0	-8.55	AV	362.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

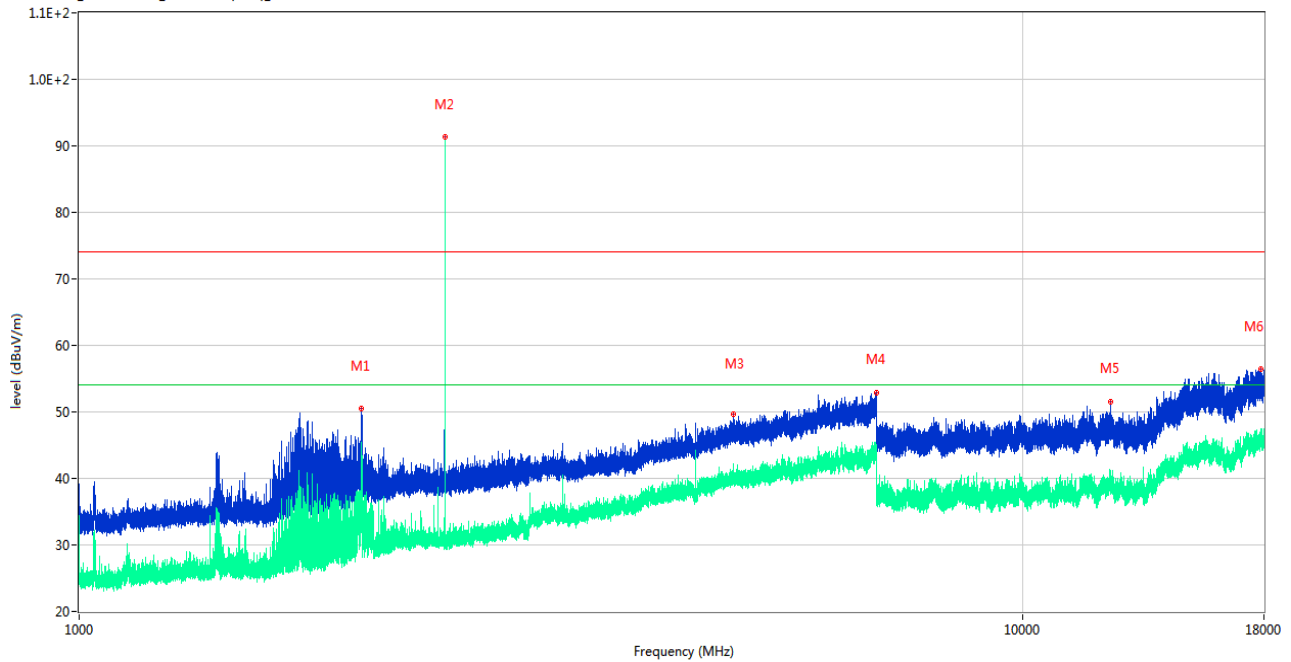

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.500	50.57	-13.42	74.0	-23.43	Peak	347.00	150	Vertical	Pass
1**	1991.500	43.47	-13.42	54.0	-10.53	AV	347.00	150	Vertical	Pass
2	2440.800	91.30	-10.52	74.0	17.30	Peak	53.00	150	Vertical	N/A
2**	2440.800	89.96	-10.52	54.0	35.96	AV	53.00	150	Vertical	N/A
3	4932.200	49.71	-1.09	74.0	-24.29	Peak	314.00	150	Vertical	Pass
3**	4932.200	40.98	-1.09	54.0	-13.02	AV	314.00	150	Vertical	Pass
4	6994.600	52.83	4.05	74.0	-21.17	Peak	219.00	150	Vertical	Pass
4**	6994.600	44.05	4.05	54.0	-9.95	AV	219.00	150	Vertical	Pass
5	12386.600	51.51	19.33	74.0	-22.49	Peak	187.00	150	Vertical	Pass
5**	12386.600	38.03	19.33	54.0	-15.97	AV	187.00	150	Vertical	Pass
6	17878.725	56.36	24.42	74.0	-17.64	Peak	335.00	150	Vertical	Pass
6**	17878.725	47.36	24.42	54.0	-6.64	AV	335.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

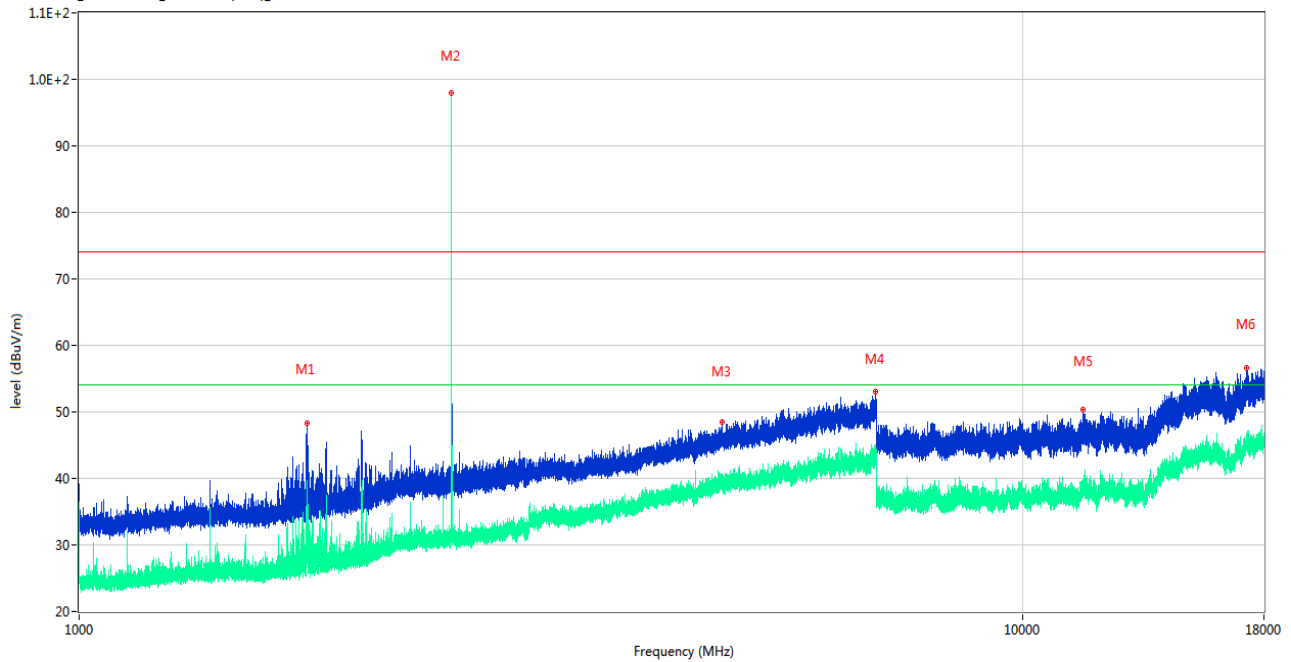

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1743.500	48.32	-14.97	74.0	-25.68	Peak	226.00	150	Horizontal	Pass
1**	1743.500	31.20	-14.97	54.0	-22.80	AV	226.00	150	Horizontal	Pass
2	2480.200	98.35	-10.32	74.0	24.35	Peak	18.00	150	Horizontal	N/A
2**	2480.200	97.85	-10.32	54.0	43.85	AV	18.00	150	Horizontal	N/A
3	4797.200	48.49	-1.63	74.0	-25.51	Peak	187.00	150	Horizontal	Pass
3**	4797.200	39.92	-1.63	54.0	-14.08	AV	187.00	150	Horizontal	Pass
4	6983.400	53.00	4.67	74.0	-21.00	Peak	72.00	150	Horizontal	Pass
4**	6983.400	43.28	4.67	54.0	-10.72	AV	72.00	150	Horizontal	Pass
5	11590.225	50.35	20.01	74.0	-23.65	Peak	308.00	150	Horizontal	Pass
5**	11590.225	39.58	20.01	54.0	-14.42	AV	308.00	150	Horizontal	Pass
6	17269.987	56.57	24.37	74.0	-17.43	Peak	20.00	150	Horizontal	Pass
6**	17269.987	45.04	24.37	54.0	-8.96	AV	20.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

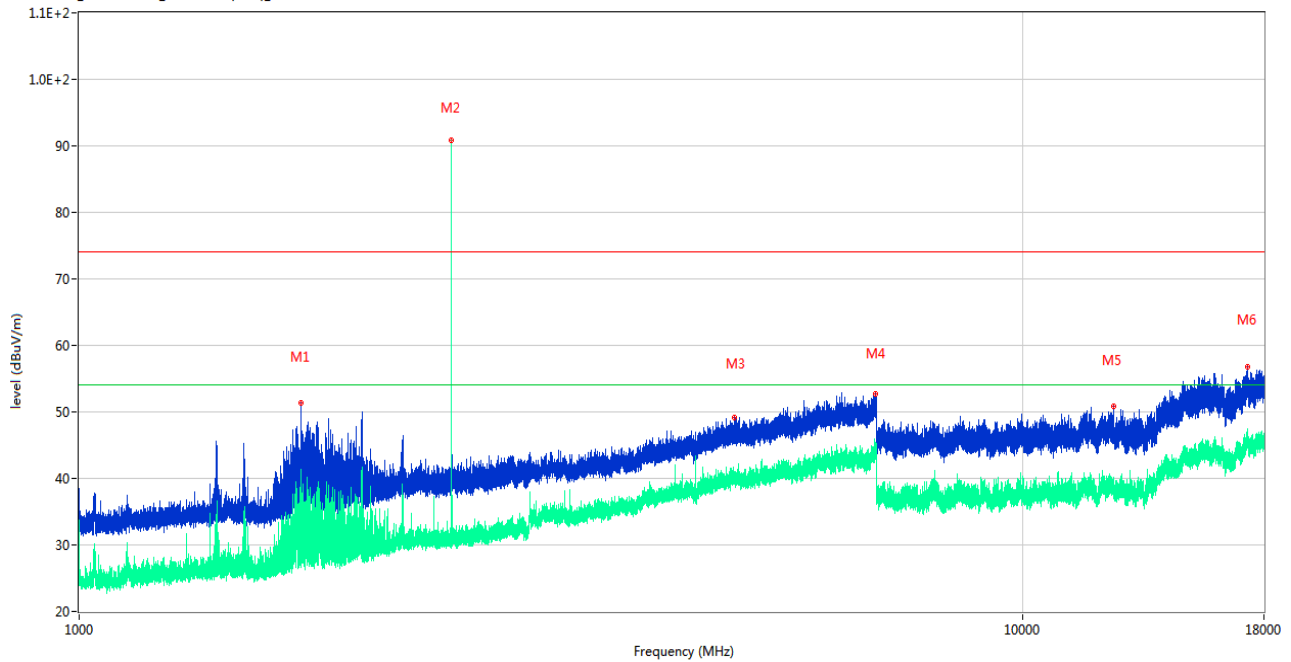

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1718.500	51.34	-14.87	74.0	-22.66	Peak	258.00	150	Vertical	Pass
1**	1718.500	30.56	-14.87	54.0	-23.44	AV	258.00	150	Vertical	Pass
2	2479.900	91.11	-10.36	74.0	17.11	Peak	127.00	150	Vertical	N/A
2**	2479.900	90.13	-10.36	54.0	36.13	AV	127.00	150	Vertical	N/A
3	4942.200	49.12	-1.46	74.0	-24.88	Peak	290.00	150	Vertical	Pass
3**	4942.200	40.61	-1.46	54.0	-13.39	AV	290.00	150	Vertical	Pass
4	6977.000	52.79	5.12	74.0	-21.21	Peak	202.00	150	Vertical	Pass
4**	6977.000	44.50	5.12	54.0	-9.50	AV	202.00	150	Vertical	Pass
5	12465.950	50.84	18.61	74.0	-23.16	Peak	203.00	150	Vertical	Pass
5**	12465.950	39.28	18.61	54.0	-14.72	AV	203.00	150	Vertical	Pass
6	17302.012	56.76	24.57	74.0	-17.24	Peak	161.00	150	Vertical	Pass
6**	17302.012	45.74	24.57	54.0	-8.26	AV	161.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

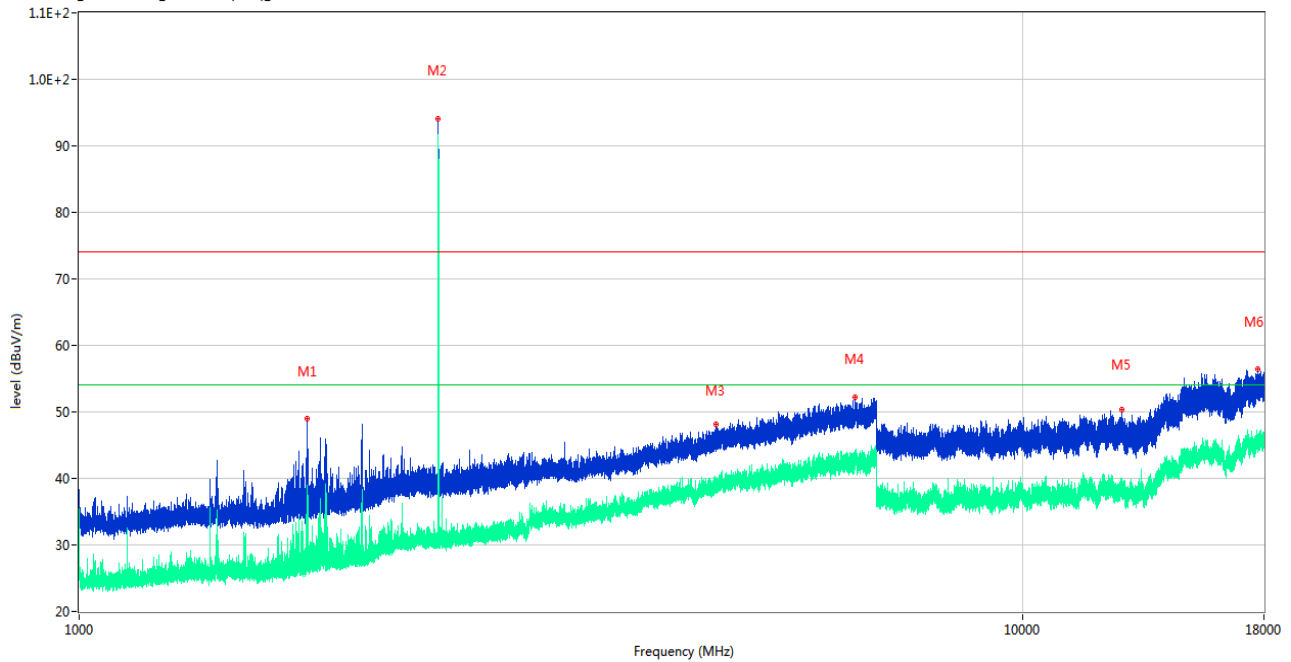

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1742.300	48.93	-15.01	74.0	-25.07	Peak	237.00	150	Horizontal	Pass
1**	1742.300	37.68	-15.01	54.0	-16.32	AV	237.00	150	Horizontal	Pass
2	2401.900	94.01	-10.74	74.0	20.01	Peak	263.00	150	Horizontal	N/A
2**	2401.900	91.12	-10.74	54.0	37.12	AV	263.00	150	Horizontal	N/A
3	4734.600	48.09	-2.00	74.0	-25.91	Peak	118.00	150	Horizontal	Pass
3**	4734.600	38.74	-2.00	54.0	-15.26	AV	118.00	150	Horizontal	Pass
4	6644.800	52.25	4.29	74.0	-21.75	Peak	159.00	150	Horizontal	Pass
4**	6644.800	42.87	4.29	54.0	-11.13	AV	159.00	150	Horizontal	Pass
5	12733.612	50.42	18.90	74.0	-23.58	Peak	306.00	150	Horizontal	Pass
5**	12733.612	37.99	18.90	54.0	-16.01	AV	306.00	150	Horizontal	Pass
6	17733.562	56.44	24.01	74.0	-17.56	Peak	275.00	150	Horizontal	Pass
6**	17733.562	44.67	24.01	54.0	-9.33	AV	275.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

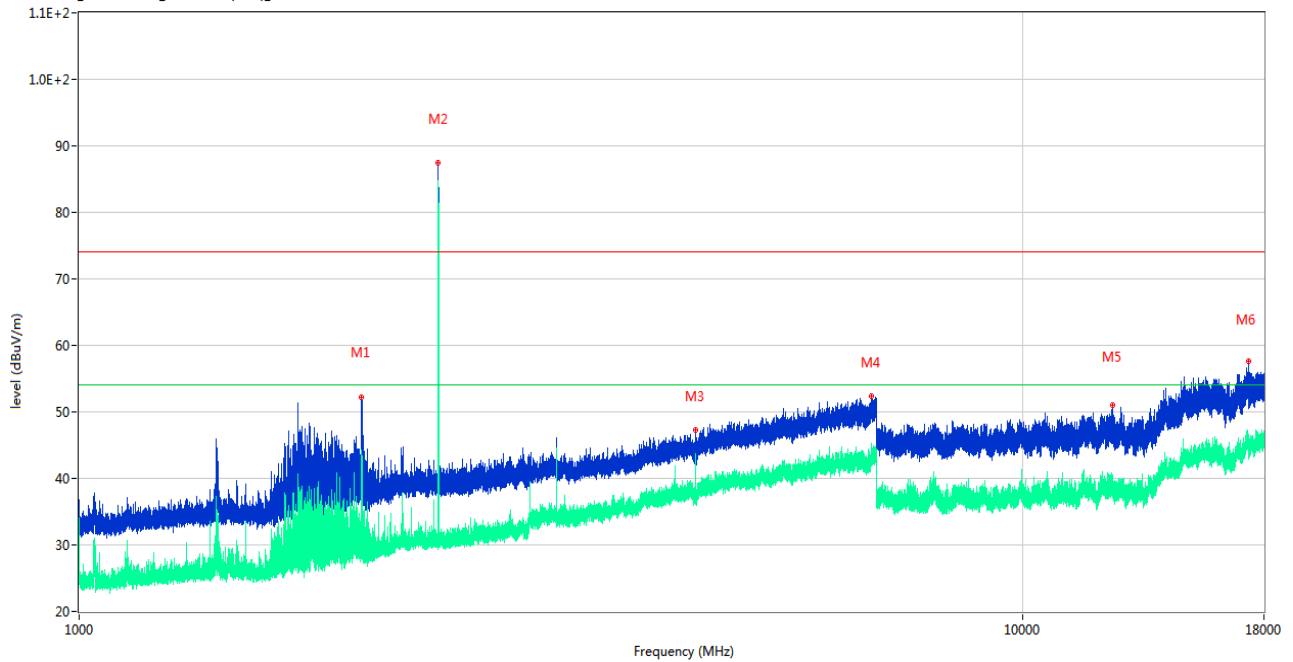

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.200	52.24	-13.44	74.0	-21.76	Peak	346.00	150	Vertical	Pass
1**	1992.200	30.06	-13.44	54.0	-23.94	AV	346.00	150	Vertical	Pass
2	2401.800	87.39	-10.75	74.0	13.39	Peak	68.00	150	Vertical	N/A
2**	2401.800	83.86	-10.75	54.0	29.86	AV	68.00	150	Vertical	N/A
3	4499.800	47.34	-2.61	74.0	-26.66	Peak	216.00	150	Vertical	Pass
3**	4499.800	42.67	-2.61	54.0	-11.33	AV	216.00	150	Vertical	Pass
4	6912.400	52.40	4.72	74.0	-21.60	Peak	147.00	150	Vertical	Pass
4**	6912.400	43.27	4.72	54.0	-10.73	AV	147.00	150	Vertical	Pass
5	12446.687	50.99	18.68	74.0	-23.01	Peak	74.00	150	Vertical	Pass
5**	12446.687	38.71	18.68	54.0	-15.29	AV	74.00	150	Vertical	Pass
6	17327.475	57.58	24.18	74.0	-16.42	Peak	351.00	150	Vertical	Pass
6**	17327.475	44.98	24.18	54.0	-9.02	AV	351.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

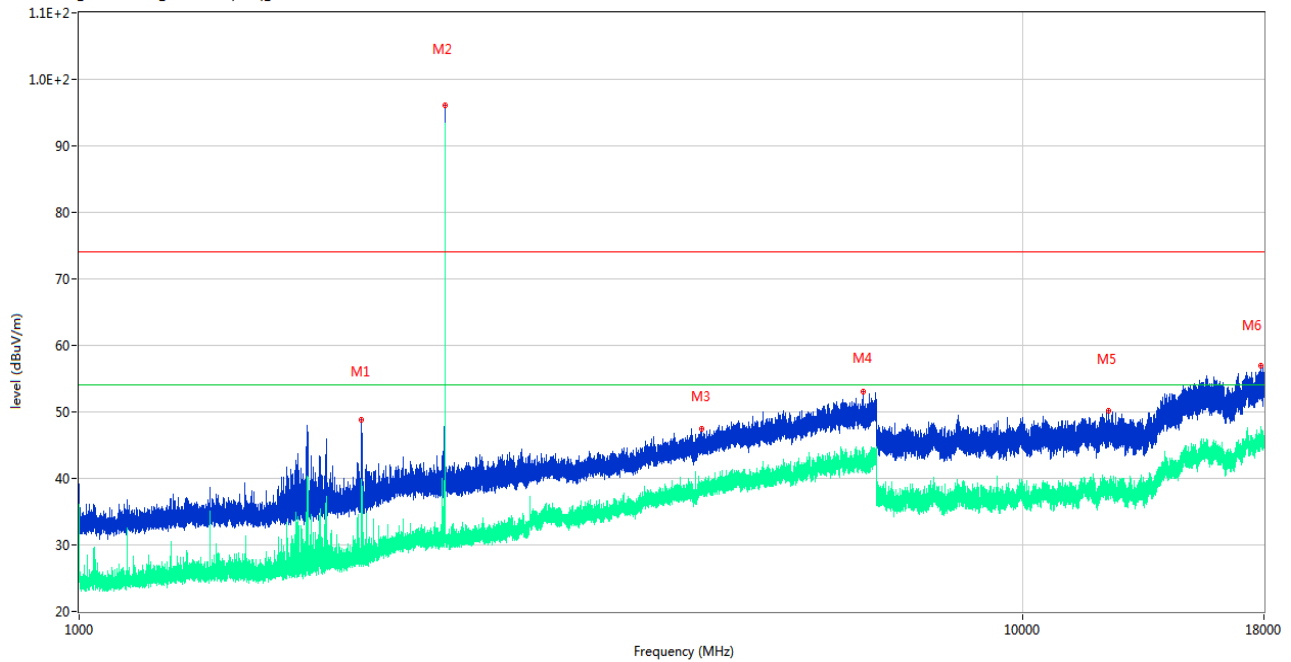

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.600	48.75	-13.42	74.0	-25.25	Peak	210.00	150	Horizontal	Pass
1**	1991.600	39.90	-13.42	54.0	-14.10	AV	210.00	150	Horizontal	Pass
2	2441.000	96.03	-10.52	74.0	22.03	Peak	260.00	150	Horizontal	N/A
2**	2441.000	92.53	-10.52	54.0	38.53	AV	260.00	150	Horizontal	N/A
3	4561.600	47.39	-2.56	74.0	-26.61	Peak	93.00	150	Horizontal	Pass
3**	4561.600	39.06	-2.56	54.0	-14.94	AV	93.00	150	Horizontal	Pass
4	6766.000	52.98	3.97	74.0	-21.02	Peak	132.00	150	Horizontal	Pass
4**	6766.000	44.71	3.97	54.0	-9.29	AV	132.00	150	Horizontal	Pass
5	12312.424	50.17	19.94	74.0	-23.83	Peak	257.00	150	Horizontal	Pass
5**	12312.424	37.76	19.94	54.0	-16.24	AV	257.00	150	Horizontal	Pass
6	17884.500	56.93	24.46	74.0	-17.07	Peak	0.00	150	Horizontal	Pass
6**	17884.500	46.23	24.46	54.0	-7.77	AV	0.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

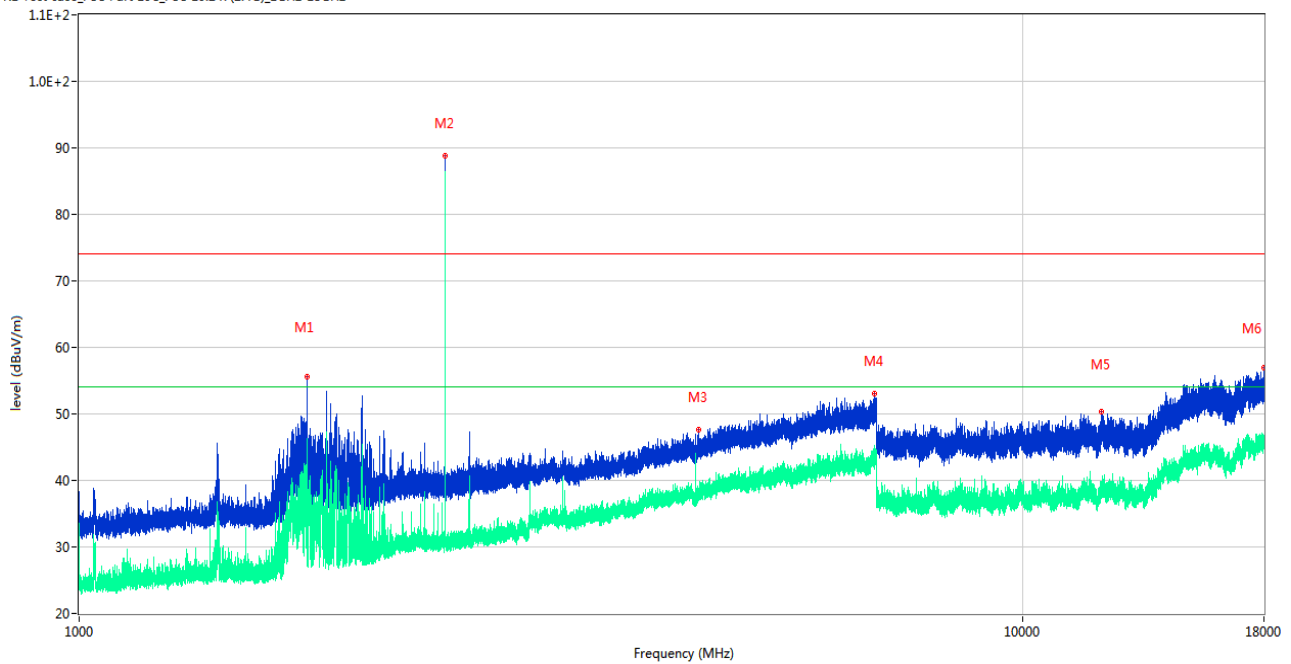

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1742.700	55.51	-15.00	74.0	-18.49	Peak	268.00	150	Vertical	Pass
1**	1742.700	33.04	-15.00	54.0	-20.96	AV	268.00	150	Vertical	Pass
2	2441.000	88.76	-10.52	74.0	14.76	Peak	294.00	150	Vertical	N/A
2**	2441.000	85.99	-10.52	54.0	31.99	AV	294.00	150	Vertical	N/A
3	4533.200	47.61	-2.42	74.0	-26.39	Peak	232.00	150	Vertical	Pass
3**	4533.200	38.04	-2.42	54.0	-15.96	AV	232.00	150	Vertical	Pass
4	6953.600	53.00	4.37	74.0	-21.00	Peak	149.00	150	Vertical	Pass
4**	6953.600	43.08	4.37	54.0	-10.92	AV	149.00	150	Vertical	Pass
5	12104.275	50.39	19.45	74.0	-23.61	Peak	118.00	150	Vertical	Pass
5**	12104.275	37.62	19.45	54.0	-16.38	AV	118.00	150	Vertical	Pass
6	17989.501	56.94	24.81	74.0	-17.06	Peak	42.00	150	Vertical	Pass
6**	17989.501	44.87	24.81	54.0	-9.13	AV	42.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

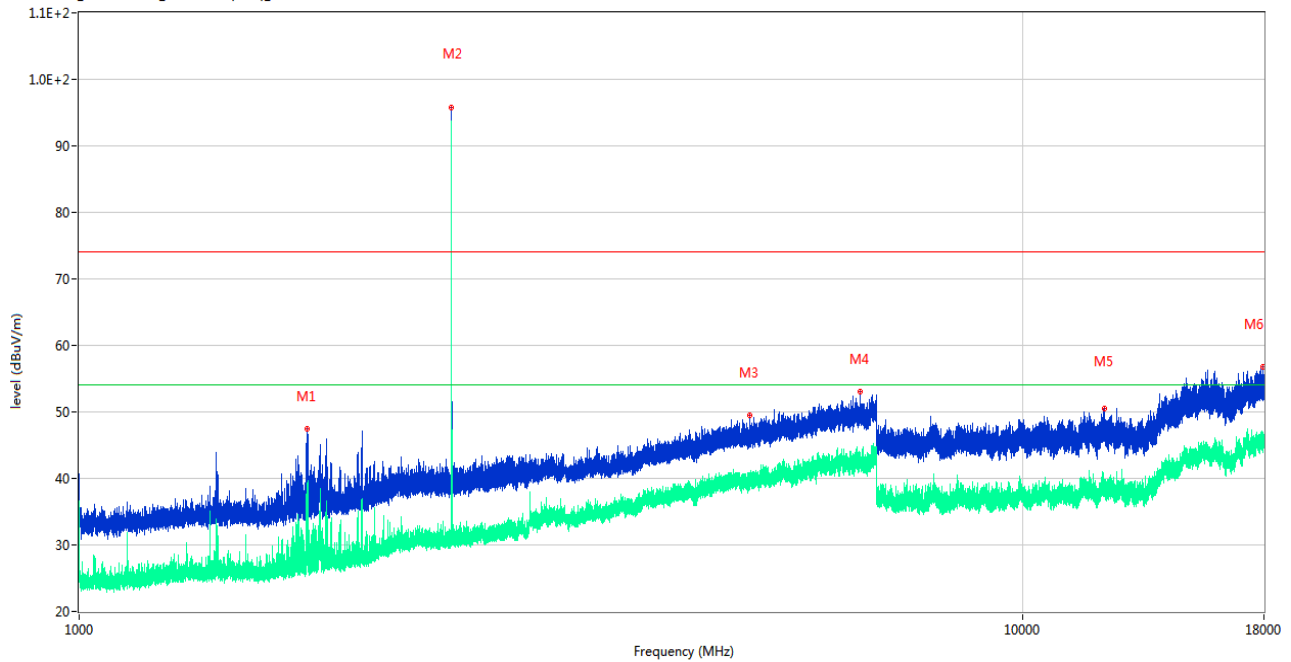

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1744.100	47.53	-14.94	74.0	-26.47	Peak	208.00	150	Horizontal	Pass
1**	1744.100	34.39	-14.94	54.0	-19.61	AV	208.00	150	Horizontal	Pass
2	2480.000	95.80	-10.35	74.0	21.80	Peak	-1.00	150	Horizontal	N/A
2**	2480.000	93.72	-10.35	54.0	39.72	AV	-1.00	150	Horizontal	N/A
3	5136.200	49.53	-0.45	74.0	-24.47	Peak	56.00	150	Horizontal	Pass
3**	5136.200	39.19	-0.45	54.0	-14.81	AV	56.00	150	Horizontal	Pass
4	6720.400	53.02	3.70	74.0	-20.98	Peak	164.00	150	Horizontal	Pass
4**	6720.400	43.18	3.70	54.0	-10.82	AV	164.00	150	Horizontal	Pass
5	12184.776	50.44	20.30	74.0	-23.56	Peak	-2.00	150	Horizontal	Pass
5**	12184.776	37.95	20.30	54.0	-16.05	AV	-2.00	150	Horizontal	Pass
6	17944.875	56.81	24.31	74.0	-17.19	Peak	194.00	150	Horizontal	Pass
6**	17944.875	45.49	24.31	54.0	-8.51	AV	194.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

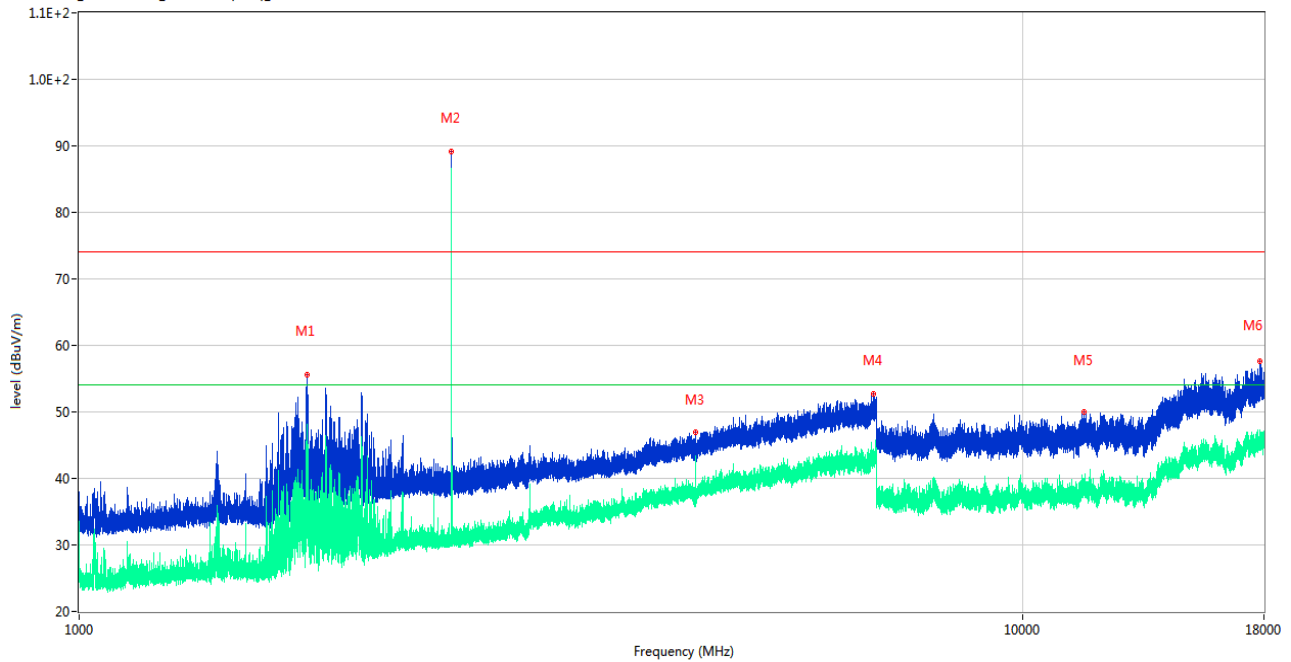


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1742.500	55.55	-15.01	74.0	-18.45	Peak	262.00	150	Vertical	Pass
1**	1742.500	36.96	-15.01	54.0	-17.04	AV	262.00	150	Vertical	Pass
2	2479.900	89.18	-10.36	74.0	15.18	Peak	35.00	150	Vertical	N/A
2**	2479.900	86.42	-10.36	54.0	32.42	AV	35.00	150	Vertical	N/A
3	4499.800	46.99	-2.61	74.0	-27.01	Peak	207.00	150	Vertical	Pass
3**	4499.800	43.32	-2.61	54.0	-10.68	AV	207.00	150	Vertical	Pass
4	6943.800	52.69	4.36	74.0	-21.31	Peak	98.00	150	Vertical	Pass
4**	6943.800	42.96	4.36	54.0	-11.04	AV	98.00	150	Vertical	Pass
5	11594.250	50.06	20.06	74.0	-23.94	Peak	130.00	150	Vertical	Pass
5**	11594.250	38.07	20.06	54.0	-15.93	AV	130.00	150	Vertical	Pass
6	17843.288	57.59	24.08	74.0	-16.41	Peak	285.00	150	Vertical	Pass
6**	17843.288	45.76	24.08	54.0	-8.24	AV	285.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

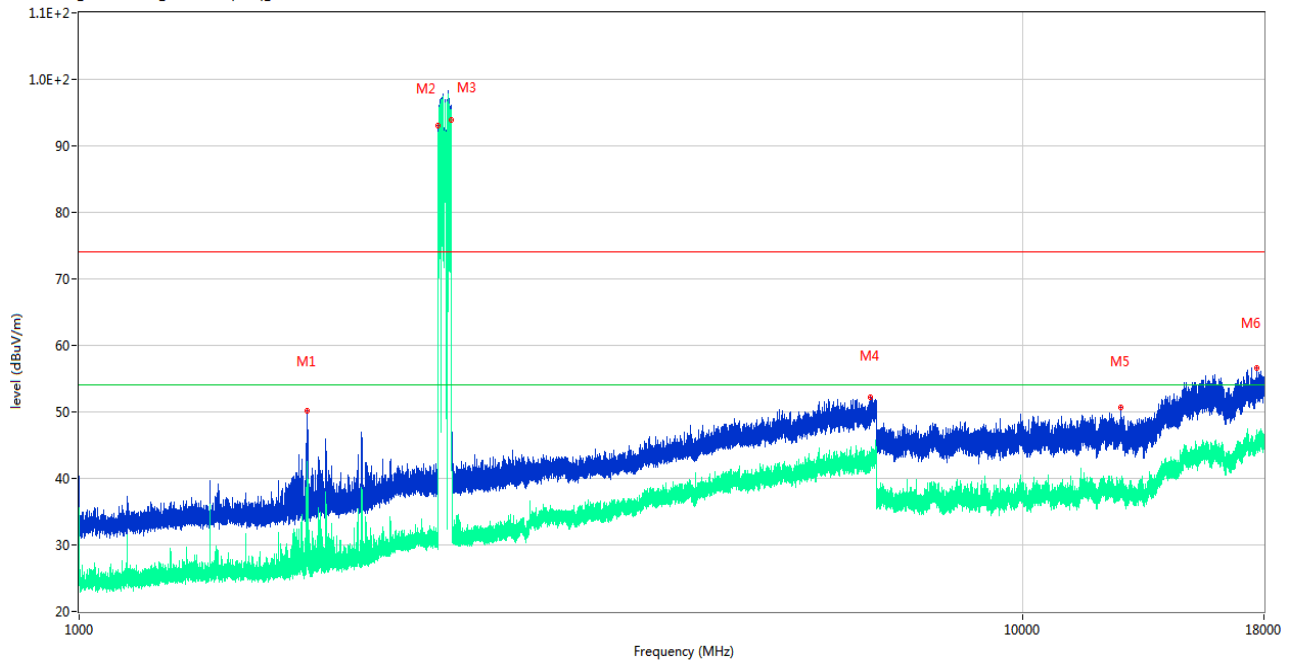

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1744.900	50.16	-14.92	74.0	-23.84	Peak	217.00	150	Horizontal	Pass
1**	1744.900	33.03	-14.92	54.0	-20.97	AV	217.00	150	Horizontal	Pass
2	2402.600	93.13	-10.71	74.0	19.13	Peak	302.00	150	Horizontal	N/A
2**	2402.600	90.60	-10.71	54.0	36.60	AV	302.00	150	Horizontal	N/A
3	2480.300	93.90	-10.31	74.0	19.90	Peak	82.00	150	Horizontal	N/A
3**	2480.300	93.15	-10.31	54.0	39.15	AV	82.00	150	Horizontal	N/A
4	6895.200	52.19	4.45	74.0	-21.81	Peak	0.00	150	Horizontal	Pass
4**	6895.200	42.42	4.45	54.0	-11.58	AV	0.00	150	Horizontal	Pass
5	12697.962	50.62	18.98	74.0	-23.38	Peak	173.00	150	Horizontal	Pass
5**	12697.962	37.82	18.98	54.0	-16.18	AV	173.00	150	Horizontal	Pass
6	17683.950	56.57	24.45	74.0	-17.43	Peak	362.00	150	Horizontal	Pass
6**	17683.950	44.95	24.45	54.0	-9.05	AV	362.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

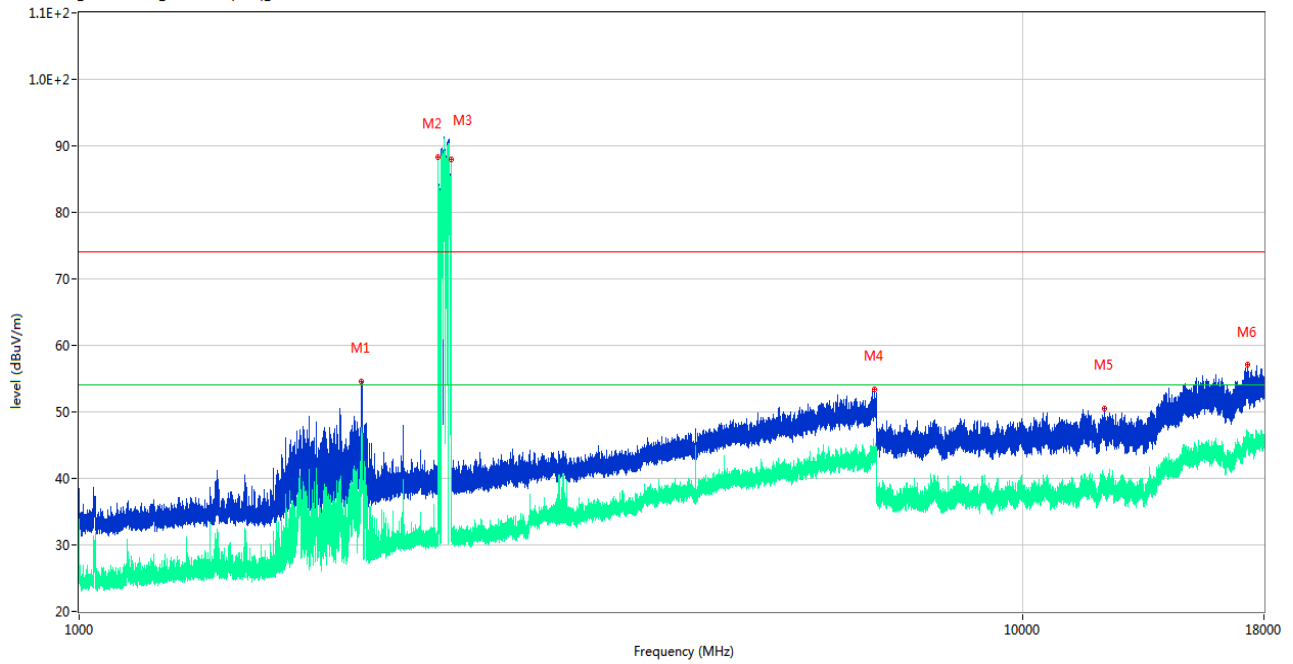

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.100	54.63	-13.42	74.0	-19.37	Peak	361.00	150	Vertical	Pass
1**	1991.100	37.27	-13.42	54.0	-16.73	AV	361.00	150	Vertical	Pass
2	2401.800	88.32	-10.75	74.0	14.32	Peak	123.00	150	Vertical	N/A
2**	2401.800	86.02	-10.75	54.0	32.02	AV	123.00	150	Vertical	N/A
3	2477.100	88.00	-10.47	74.0	14.00	Peak	123.00	150	Vertical	N/A
3**	2477.100	87.56	-10.47	54.0	33.56	AV	123.00	150	Vertical	N/A
4	6963.800	53.33	4.78	74.0	-20.67	Peak	338.00	150	Vertical	Pass
4**	6963.800	43.63	4.78	54.0	-10.37	AV	338.00	150	Vertical	Pass
5	12189.950	50.56	20.35	74.0	-23.44	Peak	-2.00	150	Vertical	Pass
5**	12189.950	38.63	20.35	54.0	-15.37	AV	-2.00	150	Vertical	Pass
6	17282.324	57.16	24.51	74.0	-16.84	Peak	245.00	150	Vertical	Pass
6**	17282.324	45.04	24.51	54.0	-8.96	AV	245.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

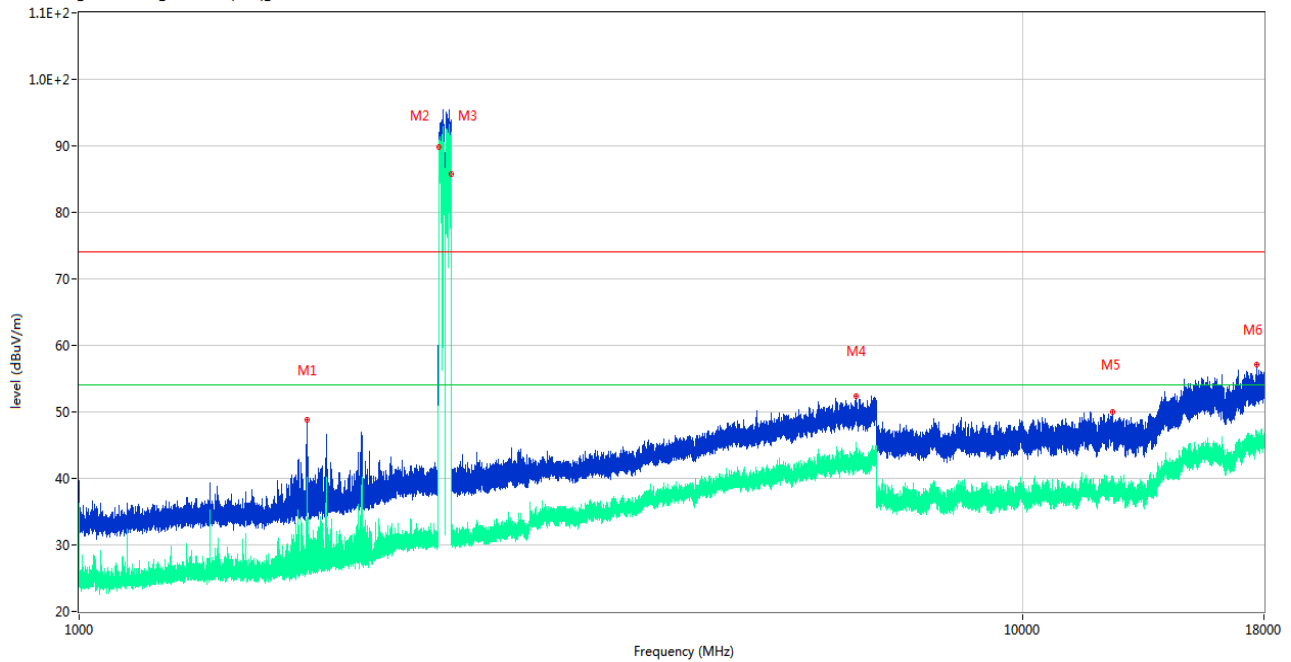

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1743.700	48.79	-14.96	74.0	-25.21	Peak	222.00	150	Horizontal	Pass
1**	1743.700	36.07	-14.96	54.0	-17.93	AV	222.00	150	Horizontal	Pass
2	2406.800	89.16	-10.68	74.0	15.16	Peak	294.00	150	Horizontal	N/A
2**	2406.800	89.84	-10.68	54.0	35.84	AV	294.00	150	Horizontal	N/A
3	2479.700	85.79	-10.37	74.0	11.79	Peak	29.00	150	Horizontal	N/A
3**	2479.700	83.28	-10.37	54.0	29.28	AV	29.00	150	Horizontal	N/A
4	6661.200	52.42	4.29	74.0	-21.58	Peak	64.00	150	Horizontal	Pass
4**	6661.200	41.98	4.29	54.0	-12.02	AV	64.00	150	Horizontal	Pass
5	12436.912	50.02	18.79	74.0	-23.98	Peak	360.00	150	Horizontal	Pass
5**	12436.912	37.70	18.79	54.0	-16.30	AV	360.00	150	Horizontal	Pass
6	17677.912	57.16	24.43	74.0	-16.84	Peak	207.00	150	Horizontal	Pass
6**	17677.912	45.99	24.43	54.0	-8.01	AV	207.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

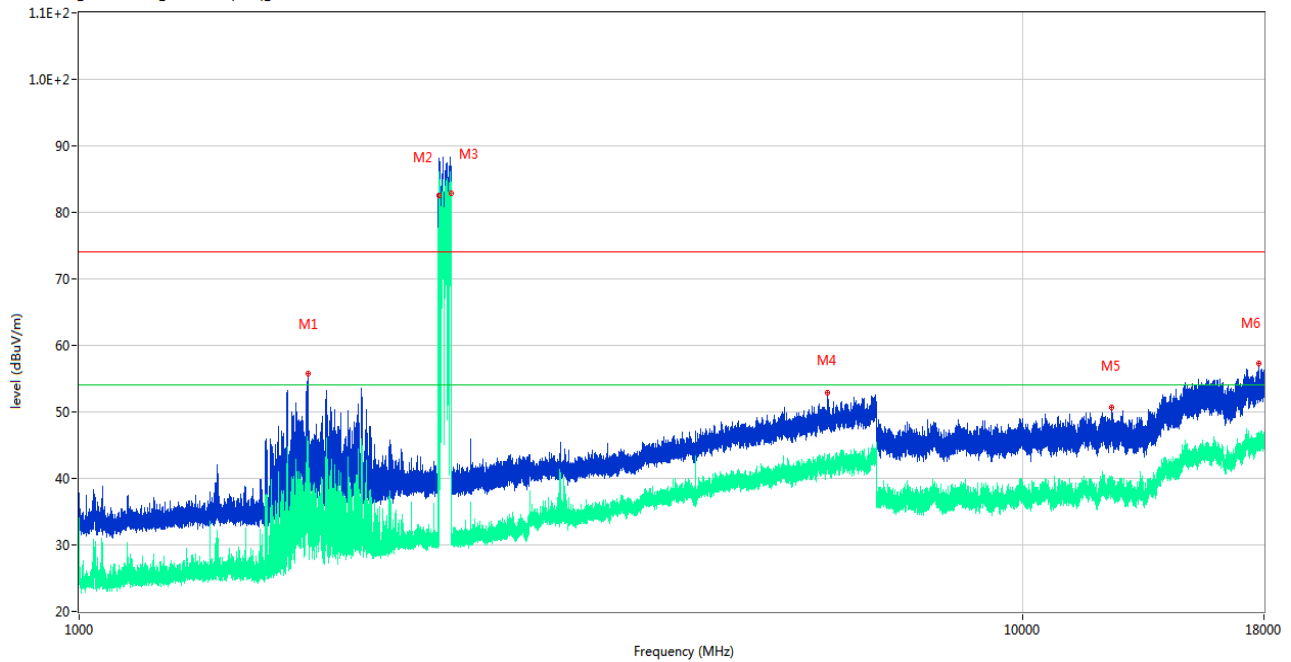


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1746.100	55.80	-14.93	74.0	-18.20	Peak	244.00	150	Vertical	Pass
1**	1746.100	36.24	-14.93	54.0	-17.76	AV	244.00	150	Vertical	Pass
2	2403.400	84.37	-10.68	74.0	10.37	Peak	61.00	150	Vertical	N/A
2**	2403.400	82.62	-10.68	54.0	28.62	AV	61.00	150	Vertical	N/A
3	2477.400	85.52	-10.47	74.0	11.52	Peak	61.00	150	Vertical	N/A
3**	2477.400	82.91	-10.47	54.0	28.91	AV	61.00	150	Vertical	N/A
4	6210.000	52.92	2.61	74.0	-21.08	Peak	139.00	150	Vertical	Pass
4**	6210.000	42.36	2.61	54.0	-11.64	AV	139.00	150	Vertical	Pass
5	12423.687	50.62	18.91	74.0	-23.38	Peak	82.00	150	Vertical	Pass
5**	12423.687	38.14	18.91	54.0	-15.86	AV	82.00	150	Vertical	Pass
6	17760.864	57.21	23.78	74.0	-16.79	Peak	362.00	150	Vertical	Pass
6**	17760.864	44.95	23.78	54.0	-9.05	AV	362.00	150	Vertical	Pass

ESP module

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

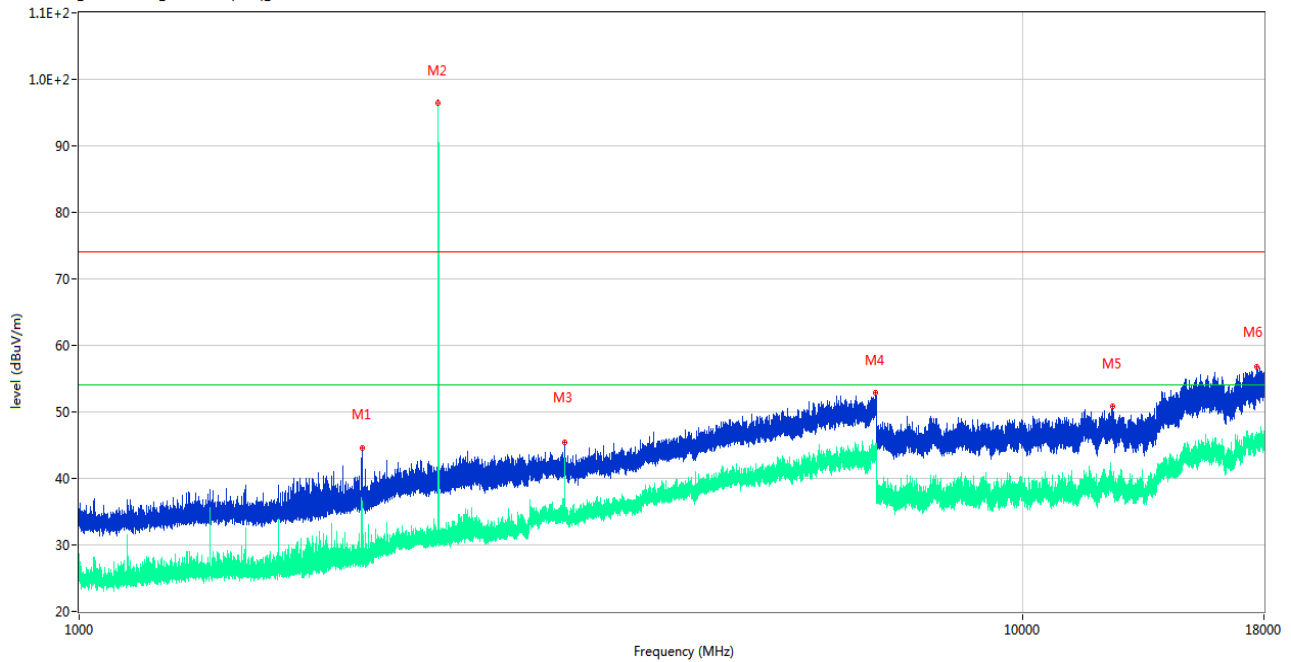

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1995.600	44.61	-13.35	74.0	-29.39	Peak	28.00	150	Horizontal	Pass
1**	1995.600	35.41	-13.35	54.0	-18.59	AV	28.00	150	Horizontal	Pass
2	2402.100	96.90	-10.74	74.0	22.90	Peak	114.00	150	Horizontal	N/A
2**	2402.100	96.35	-10.74	54.0	42.35	AV	114.00	150	Horizontal	N/A
3	3269.200	45.44	-5.85	74.0	-28.56	Peak	283.00	150	Horizontal	Pass
3**	3269.200	39.31	-5.85	54.0	-14.69	AV	283.00	150	Horizontal	Pass
4	6976.000	52.80	5.17	74.0	-21.20	Peak	44.00	150	Horizontal	Pass
4**	6976.000	44.37	5.17	54.0	-9.63	AV	44.00	150	Horizontal	Pass
5	12442.087	50.78	18.74	74.0	-23.22	Peak	296.00	150	Horizontal	Pass
5**	12442.087	38.54	18.74	54.0	-15.46	AV	296.00	150	Horizontal	Pass
6	17668.198	56.74	24.32	74.0	-17.26	Peak	-1.00	150	Horizontal	Pass
6**	17668.198	46.11	24.32	54.0	-7.89	AV	-1.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

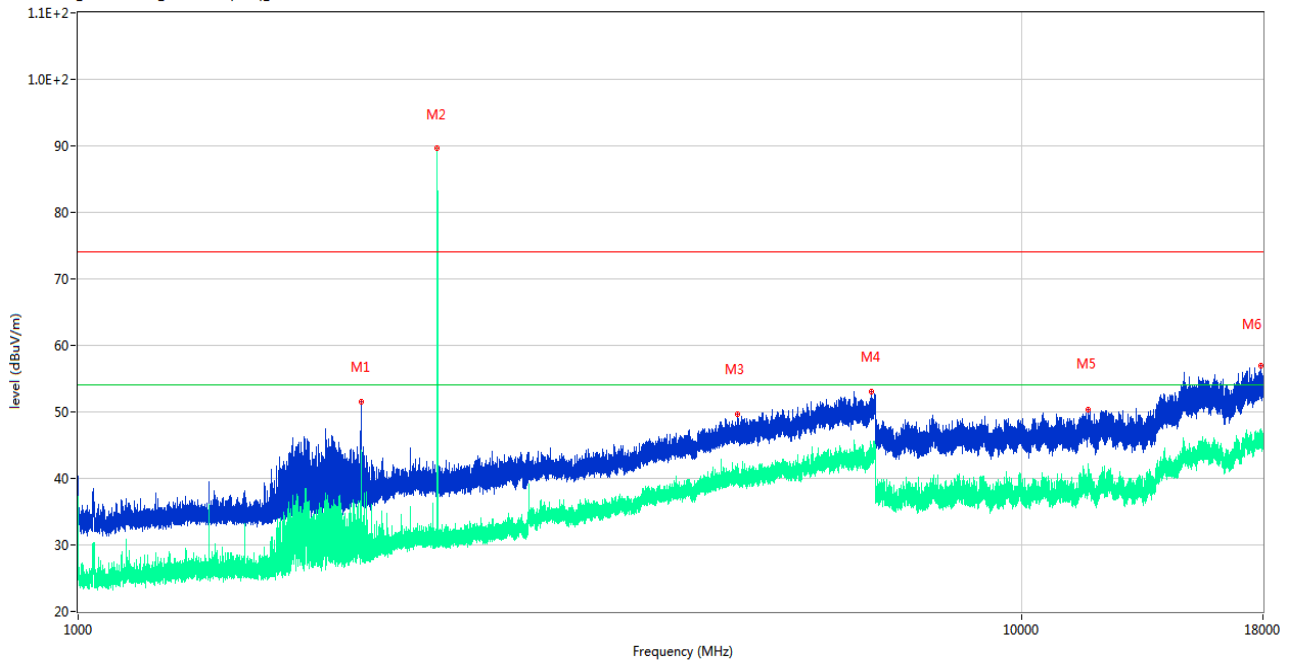

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1993.200	51.47	-13.45	74.0	-22.53	Peak	360.00	150	Vertical	Pass
1**	1993.200	42.06	-13.45	54.0	-11.94	AV	360.00	150	Vertical	Pass
2	2401.900	89.98	-10.74	74.0	15.98	Peak	131.00	150	Vertical	N/A
2**	2401.900	89.09	-10.74	54.0	35.09	AV	131.00	150	Vertical	N/A
3	4992.000	49.68	-1.00	74.0	-24.32	Peak	271.00	150	Vertical	Pass
3**	4992.000	40.36	-1.00	54.0	-13.64	AV	271.00	150	Vertical	Pass
4	6924.800	53.08	4.20	74.0	-20.92	Peak	236.00	150	Vertical	Pass
4**	6924.800	43.46	4.20	54.0	-10.54	AV	236.00	150	Vertical	Pass
5	11748.350	50.40	18.97	74.0	-23.60	Peak	360.00	150	Vertical	Pass
5**	11748.350	38.82	18.97	54.0	-15.18	AV	360.00	150	Vertical	Pass
6	17923.088	56.90	24.45	74.0	-17.10	Peak	280.00	150	Vertical	Pass
6**	17923.088	45.55	24.45	54.0	-8.45	AV	280.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

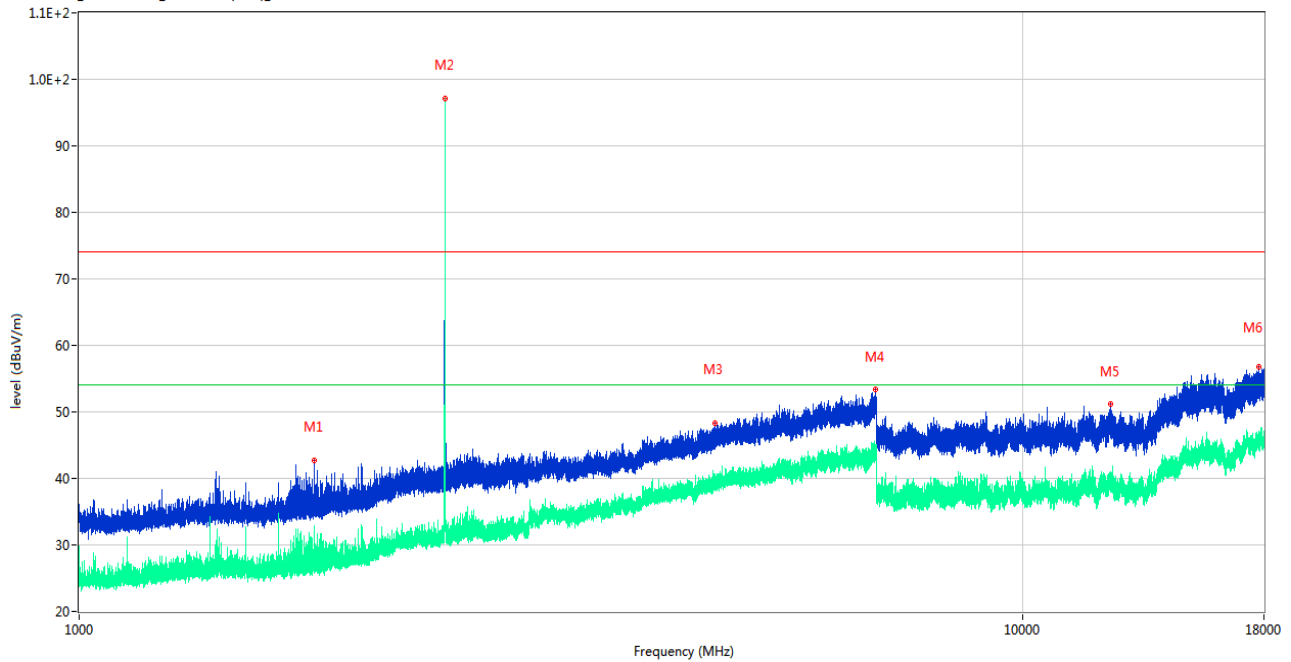

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1773.200	42.70	-14.57	74.0	-31.30	Peak	199.00	150	Horizontal	Pass
1**	1773.200	28.66	-14.57	54.0	-25.34	AV	199.00	150	Horizontal	Pass
2	2440.900	97.47	-10.52	74.0	23.47	Peak	106.00	150	Horizontal	N/A
2**	2440.900	96.75	-10.52	54.0	42.75	AV	106.00	150	Horizontal	N/A
3	4714.000	48.25	-2.44	74.0	-25.75	Peak	64.00	150	Horizontal	Pass
3**	4714.000	39.57	-2.44	54.0	-14.43	AV	64.00	150	Horizontal	Pass
4	6985.600	53.46	4.59	74.0	-20.54	Peak	74.00	150	Horizontal	Pass
4**	6985.600	43.93	4.59	54.0	-10.07	AV	74.00	150	Horizontal	Pass
5	12383.725	51.14	19.36	74.0	-22.86	Peak	131.00	150	Horizontal	Pass
5**	12383.725	39.05	19.36	54.0	-14.95	AV	131.00	150	Horizontal	Pass
6	17795.250	56.70	23.84	74.0	-17.30	Peak	260.00	150	Horizontal	Pass
6**	17795.250	45.34	23.84	54.0	-8.66	AV	260.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

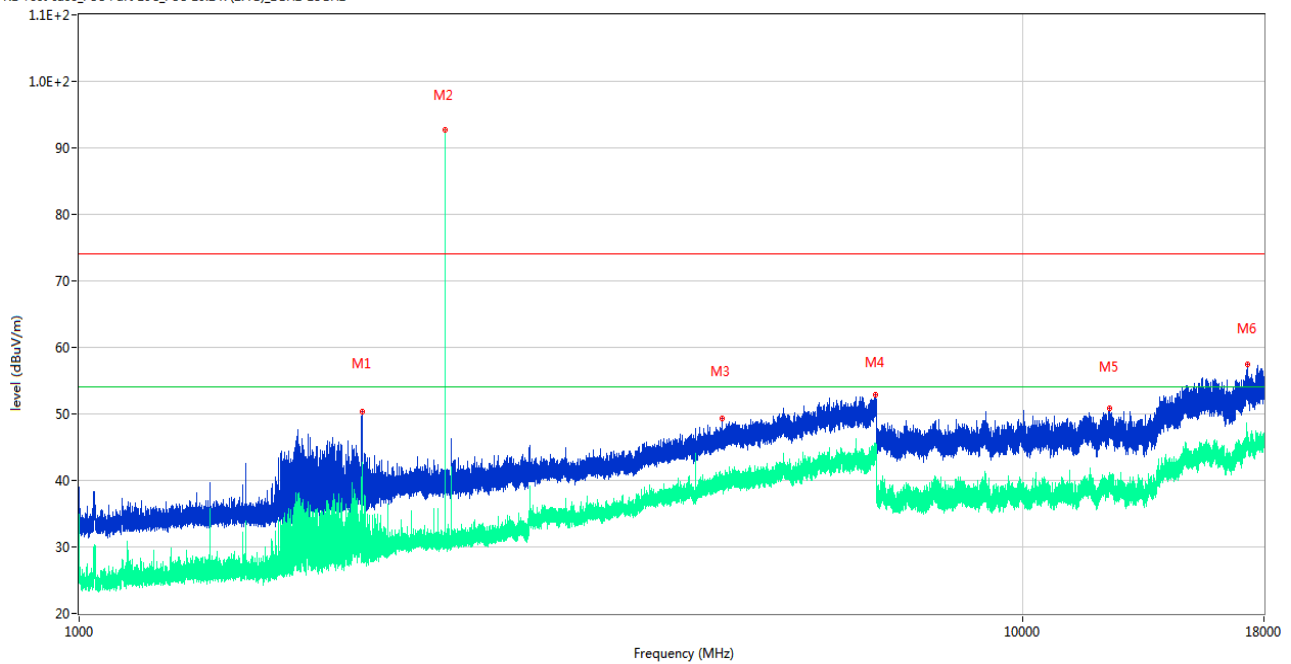

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.900	50.32	-13.45	74.0	-23.68	Peak	360.00	150	Vertical	Pass
1**	1992.900	36.12	-13.45	54.0	-17.88	AV	360.00	150	Vertical	Pass
2	2440.900	93.07	-10.52	74.0	19.07	Peak	128.00	150	Vertical	N/A
2**	2440.900	91.63	-10.52	54.0	37.63	AV	128.00	150	Vertical	N/A
3	4801.400	49.34	-1.34	74.0	-24.66	Peak	127.00	150	Vertical	Pass
3**	4801.400	39.44	-1.34	54.0	-14.56	AV	127.00	150	Vertical	Pass
4	6980.600	52.84	4.86	74.0	-21.16	Peak	300.00	150	Vertical	Pass
4**	6980.600	43.89	4.86	54.0	-10.11	AV	300.00	150	Vertical	Pass
5	12339.450	50.93	19.79	74.0	-23.07	Peak	258.00	150	Vertical	Pass
5**	12339.450	38.35	19.79	54.0	-15.65	AV	258.00	150	Vertical	Pass
6	17303.063	57.50	24.55	74.0	-16.50	Peak	267.00	150	Vertical	Pass
6**	17303.063	45.45	24.55	54.0	-8.55	AV	267.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

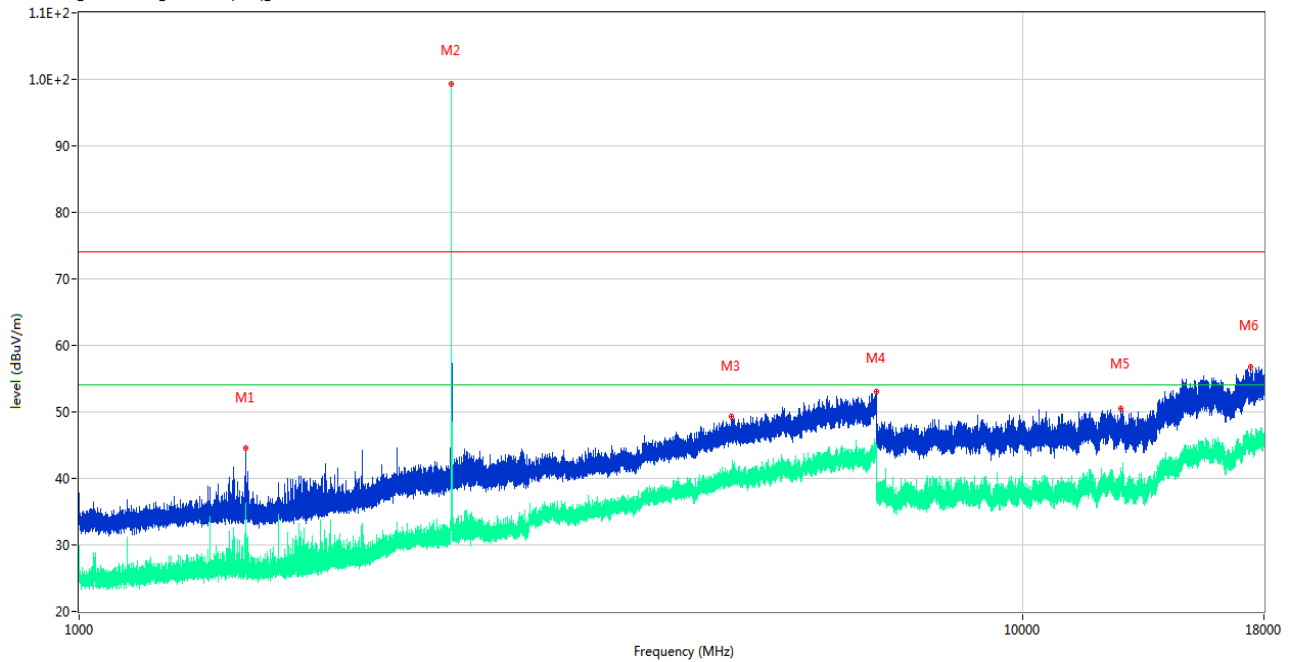

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.900	44.53	-15.19	74.0	-29.47	Peak	151.00	150	Horizontal	Pass
1**	1499.900	33.70	-15.19	54.0	-20.30	AV	151.00	150	Horizontal	Pass
2	2479.800	99.27	-10.36	74.0	25.27	Peak	37.00	150	Horizontal	N/A
2**	2479.800	98.00	-10.36	54.0	44.00	AV	37.00	150	Horizontal	N/A
3	4905.800	49.34	-0.81	74.0	-24.66	Peak	208.00	150	Horizontal	Pass
3**	4905.800	39.79	-0.81	54.0	-14.21	AV	208.00	150	Horizontal	Pass
4	6997.000	52.98	4.06	74.0	-21.02	Peak	360.00	150	Horizontal	Pass
4**	6997.000	44.61	4.06	54.0	-9.39	AV	360.00	150	Horizontal	Pass
5	12685.025	50.48	19.00	74.0	-23.52	Peak	92.00	150	Horizontal	Pass
5**	12685.025	39.41	19.00	54.0	-14.59	AV	92.00	150	Horizontal	Pass
6	17424.599	56.72	23.64	74.0	-17.28	Peak	281.00	150	Horizontal	Pass
6**	17424.599	45.11	23.64	54.0	-8.89	AV	281.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

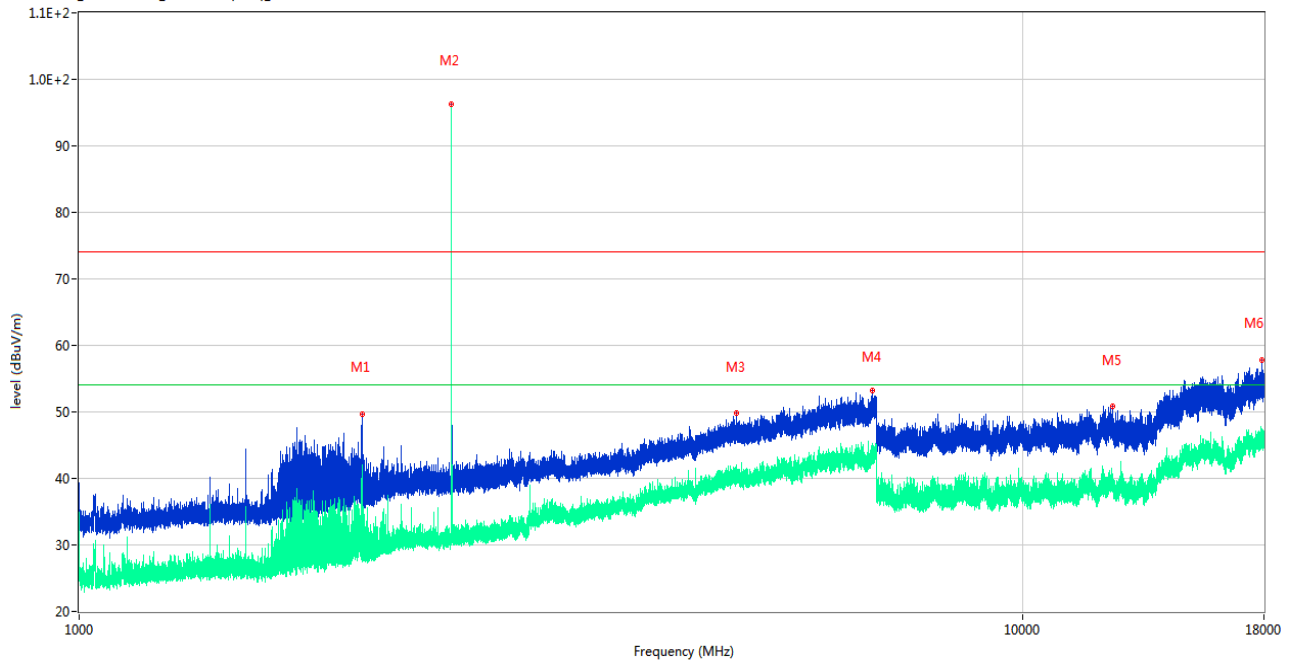

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1995.300	49.74	-13.35	74.0	-24.26	Peak	-1.00	150	Vertical	Pass
1**	1995.300	33.75	-13.35	54.0	-20.25	AV	-1.00	150	Vertical	Pass
2	2480.200	96.22	-10.32	74.0	22.22	Peak	126.00	150	Vertical	N/A
2**	2480.200	95.44	-10.32	54.0	41.44	AV	126.00	150	Vertical	N/A
3	4970.000	49.85	-1.51	74.0	-24.15	Peak	46.00	150	Vertical	Pass
3**	4970.000	39.59	-1.51	54.0	-14.41	AV	46.00	150	Vertical	Pass
4	6919.600	53.20	4.51	74.0	-20.80	Peak	320.00	150	Vertical	Pass
4**	6919.600	43.86	4.51	54.0	-10.14	AV	320.00	150	Vertical	Pass
5	12452.437	50.85	18.64	74.0	-23.15	Peak	360.00	150	Vertical	Pass
5**	12452.437	38.28	18.64	54.0	-15.72	AV	360.00	150	Vertical	Pass
6	17899.198	57.75	24.55	74.0	-16.25	Peak	246.00	150	Vertical	Pass
6**	17899.198	45.24	24.55	54.0	-8.76	AV	246.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

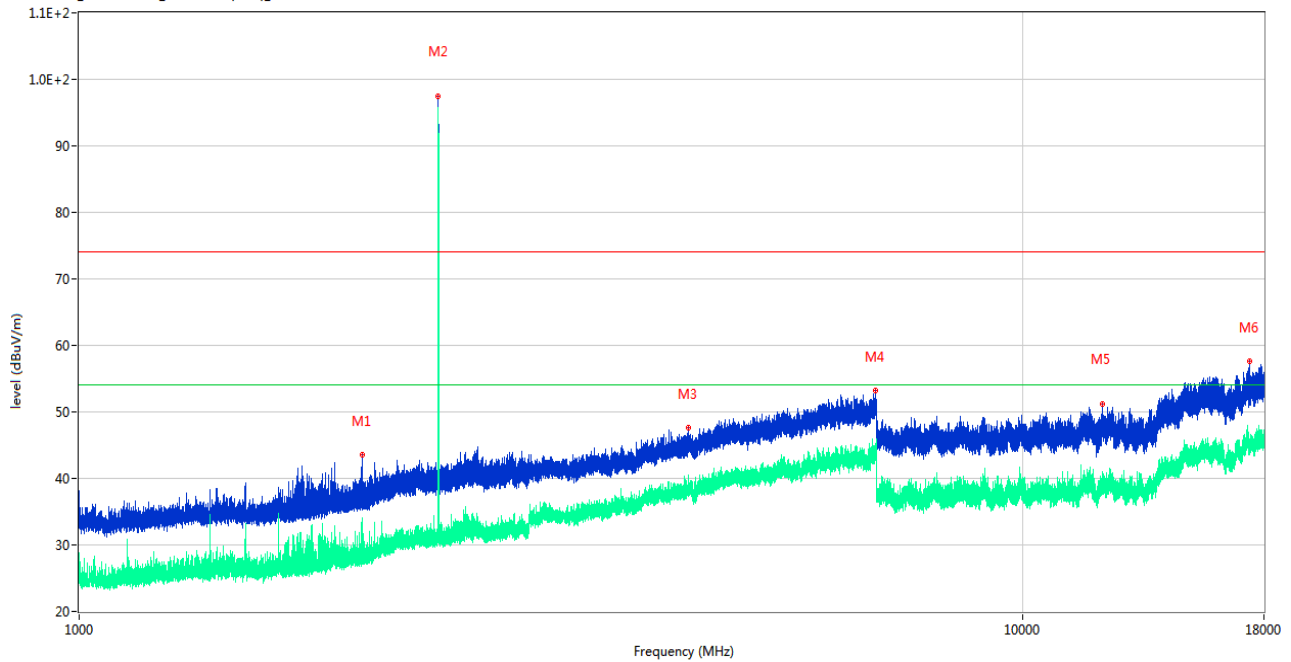

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1993.500	43.62	-13.45	74.0	-30.38	Peak	185.00	150	Horizontal	Pass
1**	1993.500	28.12	-13.45	54.0	-25.88	AV	185.00	150	Horizontal	Pass
2	2401.800	97.42	-10.75	74.0	23.42	Peak	108.00	150	Horizontal	N/A
2**	2401.800	94.39	-10.75	54.0	40.39	AV	108.00	150	Horizontal	N/A
3	4416.400	47.55	-2.81	74.0	-26.45	Peak	177.00	150	Horizontal	Pass
3**	4416.400	38.57	-2.81	54.0	-15.43	AV	177.00	150	Horizontal	Pass
4	6976.800	53.17	5.13	74.0	-20.83	Peak	191.00	150	Horizontal	Pass
4**	6976.800	43.37	5.13	54.0	-10.63	AV	191.00	150	Horizontal	Pass
5	12150.275	51.23	19.92	74.0	-22.77	Peak	360.00	150	Horizontal	Pass
5**	12150.275	38.87	19.92	54.0	-15.13	AV	360.00	150	Horizontal	Pass
6	17395.724	57.70	23.66	74.0	-16.30	Peak	99.00	150	Horizontal	Pass
6**	17395.724	44.56	23.66	54.0	-9.44	AV	99.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

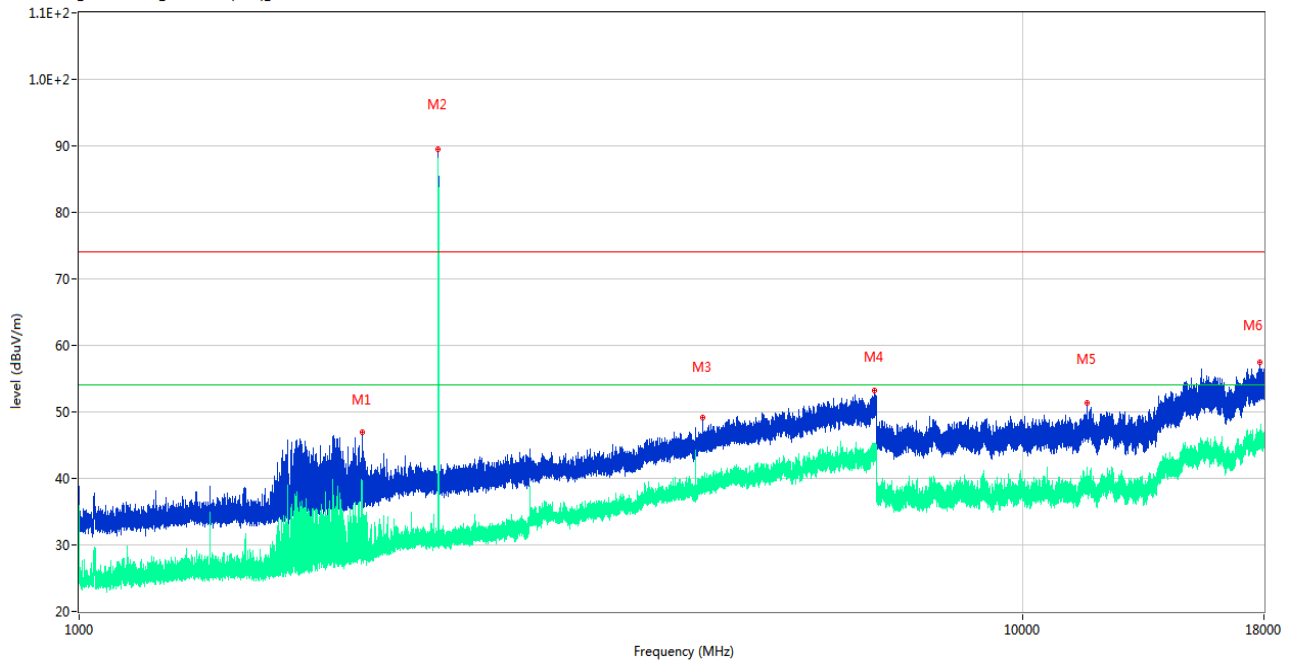

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1993.700	46.96	-13.44	74.0	-27.04	Peak	360.00	150	Vertical	Pass
1**	1993.700	31.49	-13.44	54.0	-22.51	AV	360.00	150	Vertical	Pass
2	2402.100	89.54	-10.74	74.0	15.54	Peak	132.00	150	Vertical	N/A
2**	2402.100	88.14	-10.74	54.0	34.14	AV	132.00	150	Vertical	N/A
3	4583.600	49.16	-2.41	74.0	-24.84	Peak	146.00	150	Vertical	Pass
3**	4583.600	39.59	-2.41	54.0	-14.41	AV	146.00	150	Vertical	Pass
4	6961.200	53.28	4.72	74.0	-20.72	Peak	124.00	150	Vertical	Pass
4**	6961.200	44.02	4.72	54.0	-9.98	AV	124.00	150	Vertical	Pass
5	11700.338	51.29	19.82	74.0	-22.71	Peak	12.00	150	Vertical	Pass
5**	11700.338	37.62	19.82	54.0	-16.38	AV	12.00	150	Vertical	Pass
6	17813.625	57.43	23.89	74.0	-16.57	Peak	308.00	150	Vertical	Pass
6**	17813.625	44.96	23.89	54.0	-9.04	AV	308.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

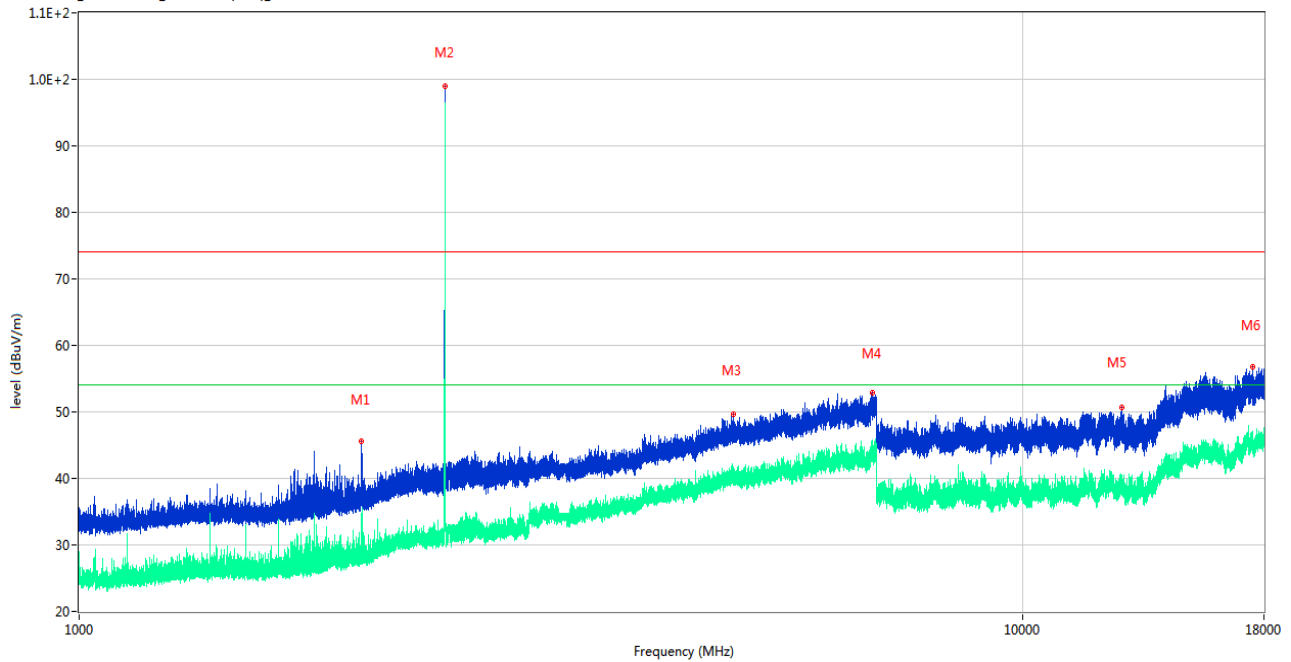

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.800	45.53	-13.45	74.0	-28.47	Peak	216.00	150	Horizontal	Pass
1**	1992.800	28.24	-13.45	54.0	-25.76	AV	216.00	150	Horizontal	Pass
2	2440.900	99.06	-10.52	74.0	25.06	Peak	119.00	150	Horizontal	N/A
2**	2440.900	95.74	-10.52	54.0	41.74	AV	119.00	150	Horizontal	N/A
3	4934.800	49.64	-1.18	74.0	-24.36	Peak	287.00	150	Horizontal	Pass
3**	4934.800	40.90	-1.18	54.0	-13.10	AV	287.00	150	Horizontal	Pass
4	6919.600	52.86	4.51	74.0	-21.14	Peak	188.00	150	Horizontal	Pass
4**	6919.600	43.88	4.51	54.0	-10.12	AV	188.00	150	Horizontal	Pass
5	12716.937	50.65	18.92	74.0	-23.35	Peak	263.00	150	Horizontal	Pass
5**	12716.937	39.18	18.92	54.0	-14.82	AV	263.00	150	Horizontal	Pass
6	17525.137	56.71	24.11	74.0	-17.29	Peak	45.00	150	Horizontal	Pass
6**	17525.137	45.08	24.11	54.0	-8.92	AV	45.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

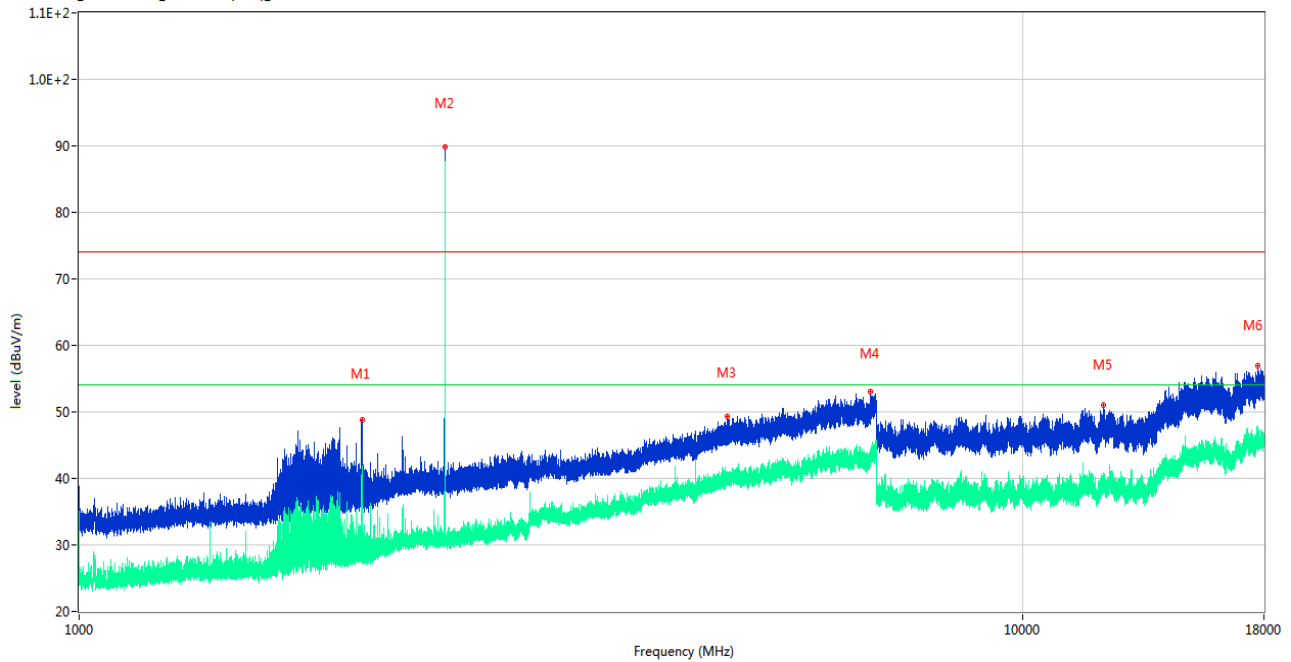

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.200	48.77	-13.41	74.0	-25.23	Peak	0.00	150	Vertical	Pass
1**	1994.200	35.31	-13.41	54.0	-18.69	AV	0.00	150	Vertical	Pass
2	2441.000	89.85	-10.52	74.0	15.85	Peak	130.00	150	Vertical	N/A
2**	2441.000	87.22	-10.52	54.0	33.22	AV	130.00	150	Vertical	N/A
3	4864.200	49.28	-1.48	74.0	-24.72	Peak	107.00	150	Vertical	Pass
3**	4864.200	39.94	-1.48	54.0	-14.06	AV	107.00	150	Vertical	Pass
4	6899.200	52.98	4.73	74.0	-21.02	Peak	13.00	150	Vertical	Pass
4**	6899.200	42.64	4.73	54.0	-11.36	AV	13.00	150	Vertical	Pass
5	12166.375	51.08	20.11	74.0	-22.92	Peak	319.00	150	Vertical	Pass
5**	12166.375	39.15	20.11	54.0	-14.85	AV	319.00	150	Vertical	Pass
6	17714.137	56.89	24.23	74.0	-17.11	Peak	172.00	150	Vertical	Pass
6**	17714.137	46.30	24.23	54.0	-7.70	AV	172.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

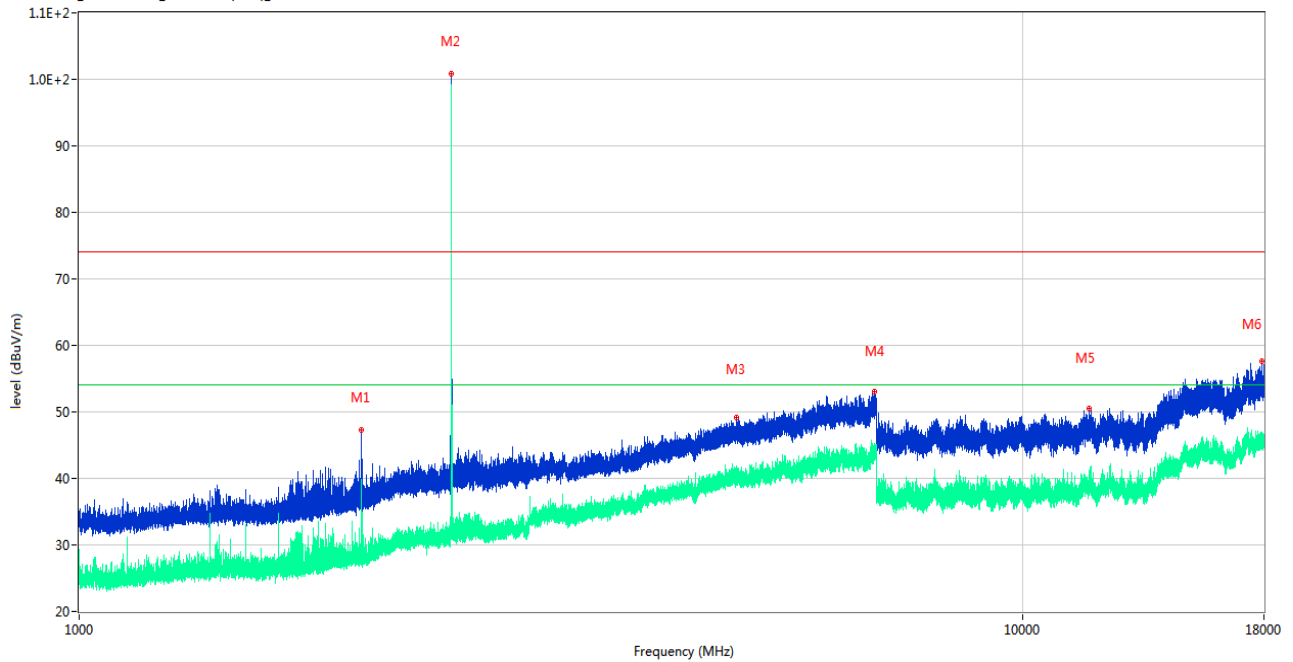

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.800	47.28	-13.43	74.0	-26.72	Peak	226.00	150	Horizontal	Pass
1**	1991.800	27.34	-13.43	54.0	-26.66	AV	226.00	150	Horizontal	Pass
2	2480.100	100.82	-10.33	74.0	26.82	Peak	46.00	150	Horizontal	N/A
2**	2480.100	99.16	-10.33	54.0	45.16	AV	46.00	150	Horizontal	N/A
3	4970.000	49.17	-1.51	74.0	-24.83	Peak	190.00	150	Horizontal	Pass
3**	4970.000	40.10	-1.51	54.0	-13.90	AV	190.00	150	Horizontal	Pass
4	6953.200	53.10	4.31	74.0	-20.90	Peak	285.00	150	Horizontal	Pass
4**	6953.200	43.13	4.31	54.0	-10.87	AV	285.00	150	Horizontal	Pass
5	11748.350	50.49	18.97	74.0	-23.51	Peak	123.00	150	Horizontal	Pass
5**	11748.350	38.73	18.97	54.0	-15.27	AV	123.00	150	Horizontal	Pass
6	17891.062	57.60	24.50	74.0	-16.40	Peak	80.00	150	Horizontal	Pass
6**	17891.062	45.17	24.50	54.0	-8.83	AV	80.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

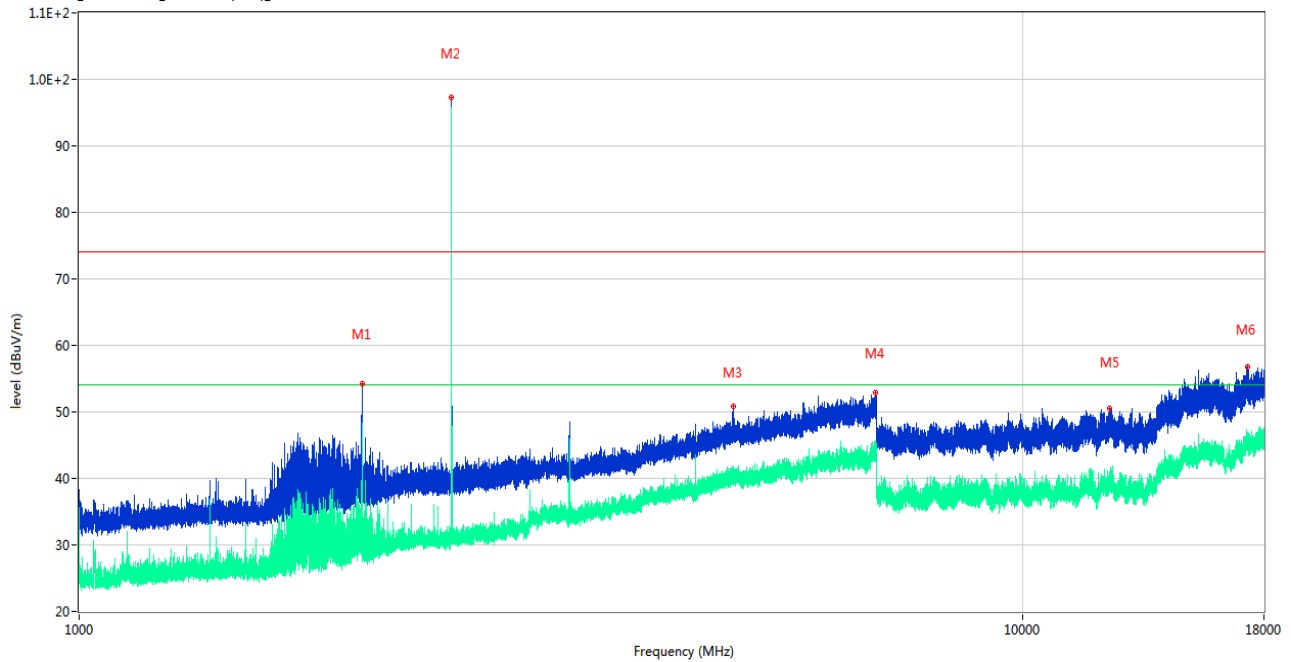


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1993.000	54.18	-13.45	74.0	-19.82	Peak	360.00	150	Vertical	Pass
1**	1993.000	40.41	-13.45	54.0	-13.59	AV	360.00	150	Vertical	Pass
2	2479.900	97.21	-10.36	74.0	23.21	Peak	136.00	150	Vertical	N/A
2**	2479.900	95.28	-10.36	54.0	41.28	AV	136.00	150	Vertical	N/A
3	4928.200	50.79	-1.23	74.0	-23.21	Peak	125.00	150	Vertical	Pass
3**	4928.200	40.84	-1.23	54.0	-13.16	AV	125.00	150	Vertical	Pass
4	6978.600	52.82	4.98	74.0	-21.18	Peak	352.00	150	Vertical	Pass
4**	6978.600	44.38	4.98	54.0	-9.62	AV	352.00	150	Vertical	Pass
5	12347.787	50.50	19.73	74.0	-23.50	Peak	270.00	150	Vertical	Pass
5**	12347.787	40.19	19.73	54.0	-13.81	AV	270.00	150	Vertical	Pass
6	17296.761	56.72	24.58	74.0	-17.28	Peak	232.00	150	Vertical	Pass
6**	17296.761	45.82	24.58	54.0	-8.18	AV	232.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

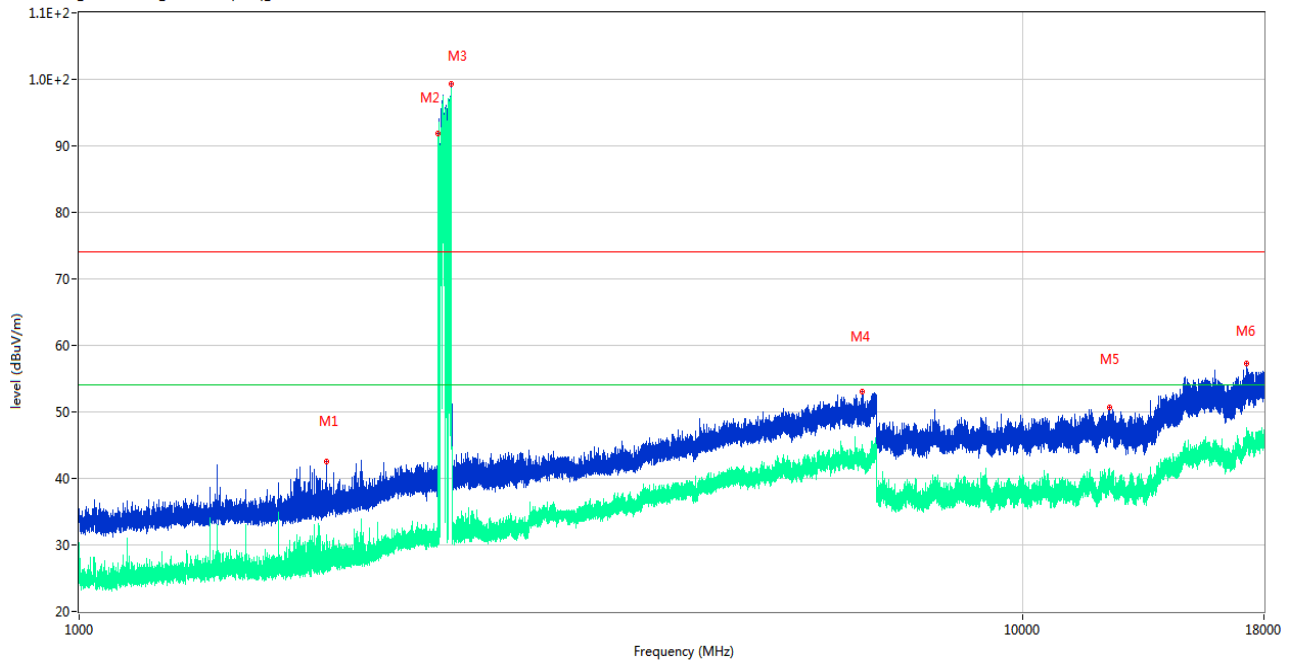

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1829.200	42.50	-14.54	74.0	-31.50	Peak	182.00	150	Horizontal	Pass
1**	1829.200	30.31	-14.54	54.0	-23.69	AV	182.00	150	Horizontal	Pass
2	2402.000	91.86	-10.74	74.0	17.86	Peak	0.00	150	Horizontal	N/A
2**	2402.000	90.93	-10.74	54.0	36.93	AV	0.00	150	Horizontal	N/A
3	2479.800	99.27	-10.36	74.0	25.27	Peak	74.00	150	Horizontal	N/A
3**	2479.800	96.98	-10.36	54.0	42.98	AV	74.00	150	Horizontal	N/A
4	6756.000	53.03	4.37	74.0	-20.97	Peak	232.00	150	Horizontal	Pass
4**	6756.000	42.45	4.37	54.0	-11.55	AV	232.00	150	Horizontal	Pass
5	12366.474	50.68	19.56	74.0	-23.32	Peak	282.00	150	Horizontal	Pass
5**	12366.474	39.32	19.56	54.0	-14.68	AV	282.00	150	Horizontal	Pass
6	17257.912	57.21	24.23	74.0	-16.79	Peak	23.00	150	Horizontal	Pass
6**	17257.912	45.36	24.23	54.0	-8.64	AV	23.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

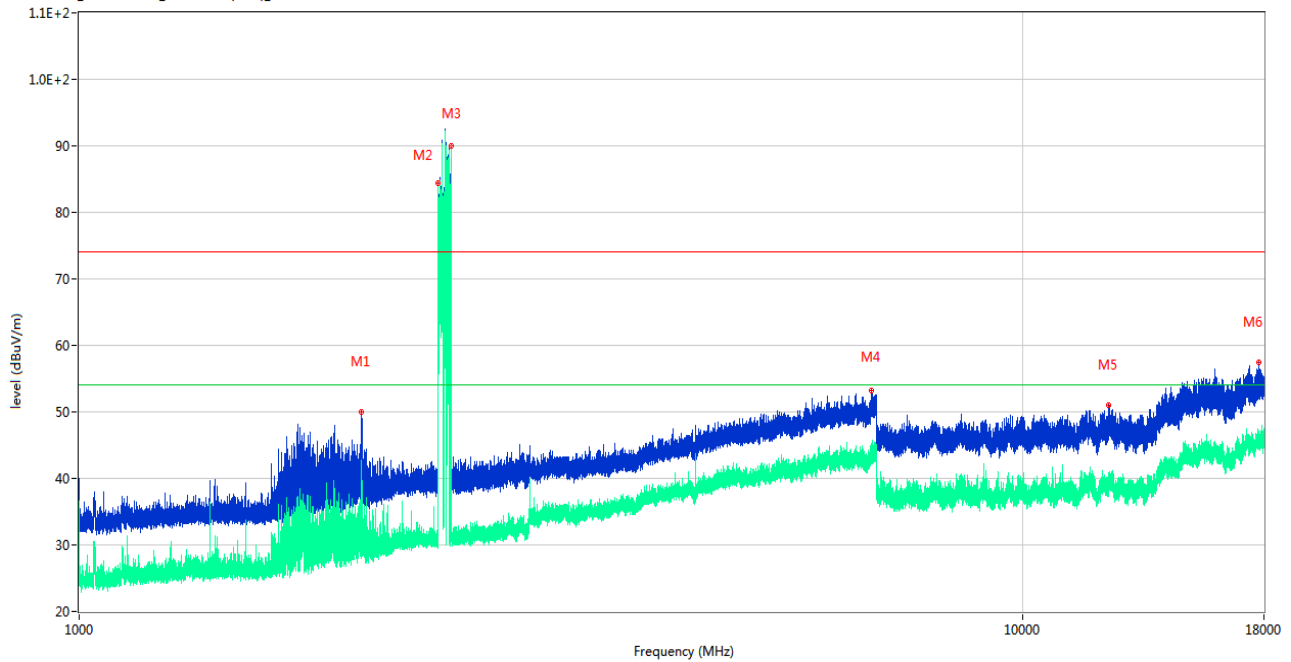

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.700	49.97	-13.45	74.0	-24.03	Peak	-1.00	150	Vertical	Pass
1**	1992.700	39.65	-13.45	54.0	-14.35	AV	-1.00	150	Vertical	Pass
2	2401.900	84.37	-10.74	74.0	10.37	Peak	152.00	150	Vertical	N/A
2**	2401.900	81.86	-10.74	54.0	27.86	AV	152.00	150	Vertical	N/A
3	2479.100	89.92	-10.40	74.0	15.92	Peak	206.00	150	Vertical	N/A
3**	2479.100	89.95	-10.40	54.0	35.95	AV	206.00	150	Vertical	N/A
4	6913.800	53.24	4.78	74.0	-20.76	Peak	208.00	150	Vertical	Pass
4**	6913.800	44.66	4.78	54.0	-9.34	AV	208.00	150	Vertical	Pass
5	12314.724	50.95	19.94	74.0	-23.05	Peak	102.00	150	Vertical	Pass
5**	12314.724	39.32	19.94	54.0	-14.68	AV	102.00	150	Vertical	Pass
6	17797.087	57.39	23.85	74.0	-16.61	Peak	0.00	150	Vertical	Pass
6**	17797.087	46.53	23.85	54.0	-7.47	AV	0.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

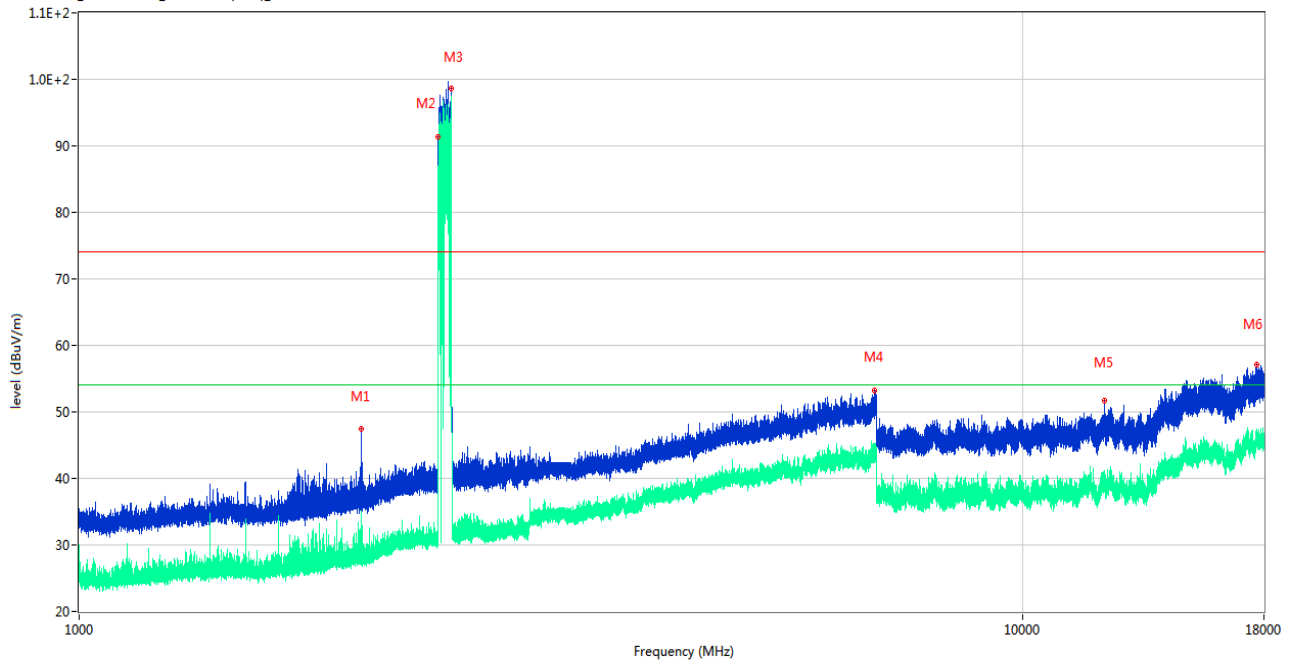

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1991.900	47.41	-13.43	74.0	-26.59	Peak	225.00	150	Horizontal	Pass
1**	1991.900	35.03	-13.43	54.0	-18.97	AV	225.00	150	Horizontal	Pass
2	2402.600	91.41	-10.71	74.0	17.41	Peak	125.00	150	Horizontal	N/A
2**	2402.600	86.17	-10.71	54.0	32.17	AV	125.00	150	Horizontal	N/A
3	2480.000	98.56	-10.35	74.0	24.56	Peak	140.00	150	Horizontal	N/A
3**	2480.000	96.92	-10.35	54.0	42.92	AV	140.00	150	Horizontal	N/A
4	6966.400	53.19	4.94	74.0	-20.81	Peak	163.00	150	Horizontal	Pass
4**	6966.400	43.68	4.94	54.0	-10.32	AV	163.00	150	Horizontal	Pass
5	12200.875	51.69	20.43	74.0	-22.31	Peak	196.00	150	Horizontal	Pass
5**	12200.875	38.84	20.43	54.0	-15.16	AV	196.00	150	Horizontal	Pass
6	17674.762	57.18	24.39	74.0	-16.82	Peak	192.00	150	Horizontal	Pass
6**	17674.762	45.45	24.39	54.0	-8.55	AV	192.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

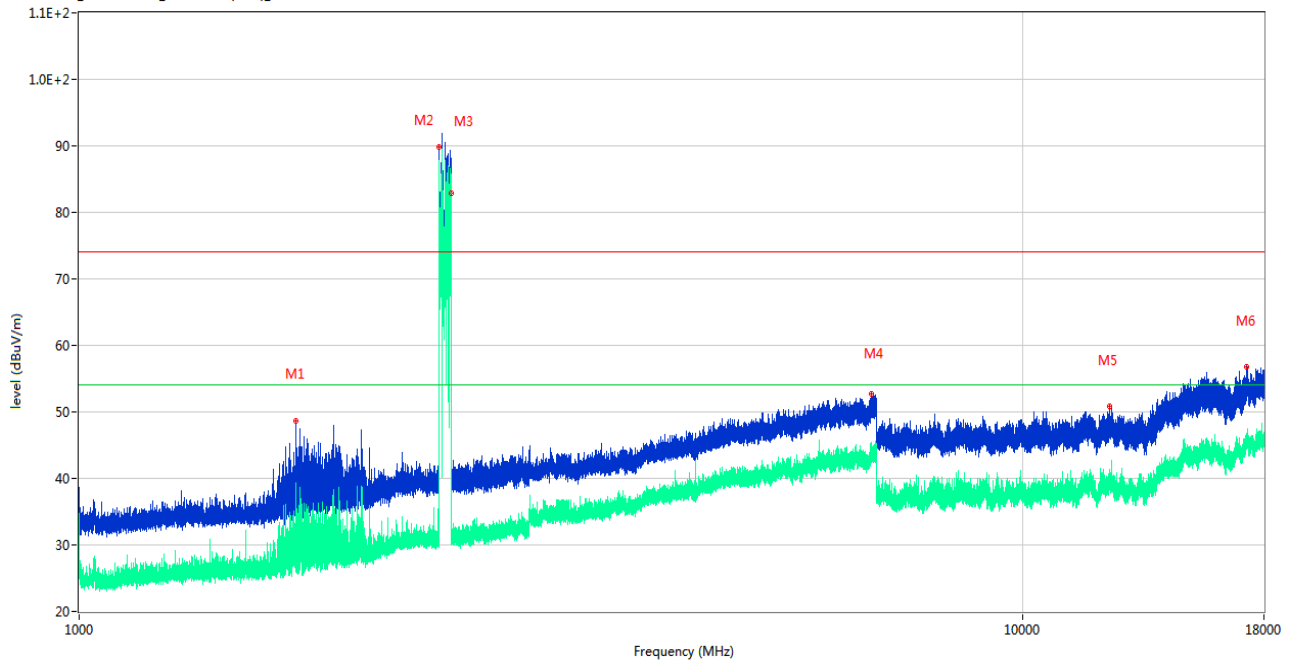

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1698.300	48.57	-15.19	74.0	-25.43	Peak	261.00	150	Vertical	Pass
1**	1698.300	39.29	-15.19	54.0	-14.71	AV	261.00	150	Vertical	Pass
2	2404.900	89.89	-10.76	74.0	15.89	Peak	131.00	150	Vertical	N/A
2**	2404.900	86.51	-10.76	54.0	32.51	AV	131.00	150	Vertical	N/A
3	2479.000	83.27	-10.40	74.0	9.27	Peak	319.00	150	Vertical	N/A
3**	2479.000	82.91	-10.40	54.0	28.91	AV	319.00	150	Vertical	N/A
4	6907.600	52.77	4.68	74.0	-21.23	Peak	-1.00	150	Vertical	Pass
4**	6907.600	43.64	4.68	54.0	-10.36	AV	-1.00	150	Vertical	Pass
5	12358.425	50.93	19.65	74.0	-23.07	Peak	191.00	150	Vertical	Pass
5**	12358.425	39.29	19.65	54.0	-14.71	AV	191.00	150	Vertical	Pass
6	17252.401	56.82	24.21	74.0	-17.18	Peak	43.00	150	Vertical	Pass
6**	17252.401	45.83	24.21	54.0	-8.17	AV	43.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

AP module

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	53.148	31.47	74	20.852	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	52.836	31.40	74	21.164	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	53.414	31.47	74	20.586	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	52.736	31.40	74	21.264	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	52.336	31.47	74	21.664	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	52.69	31.40	74	21.310	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	52.726	31.47	74	21.274	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	53.259	31.40	74	20.741	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass


ESP module

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	52.585	31.470	74	21.415	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	53.541	31.400	74	20.459	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	53.953	31.470	74	20.047	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	55.852	31.400	74	18.148	PEAK	Pass
		2483.50	43.488	31.400	54	10.512	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	52.873	31.470	74	21.127	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	52.157	31.400	74	21.843	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	53.316	31.470	74	20.684	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	53.356	53.953	74	20.644	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots

AP module

GFSK LOW CHANNEL, PEAK

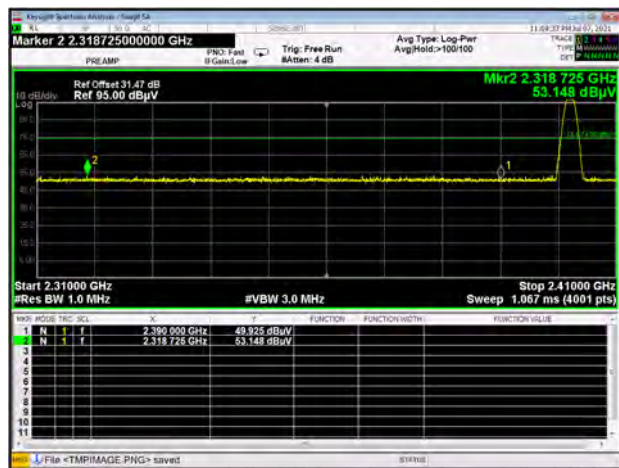


GFSK HIGH CHANNEL, PEAK



8-DPSK LOW CHANNEL, PEAK




8-DPSK HIGH CHANNEL, PEAK

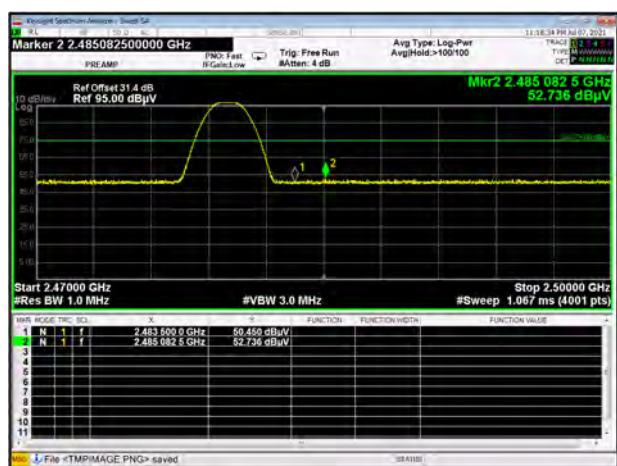

Hopping Mode:


GFSK LOW FREQUENCY BAND, PEAK

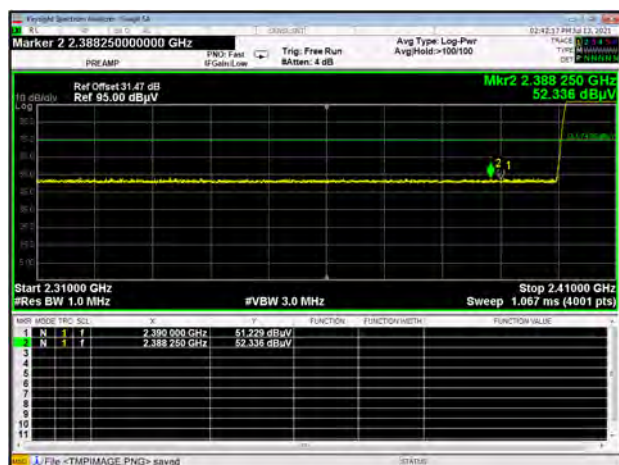

GFSK HIGH FREQUENCY BAND, PEAK



8-DPSK LOW FREQUENCY BAND, PEAK

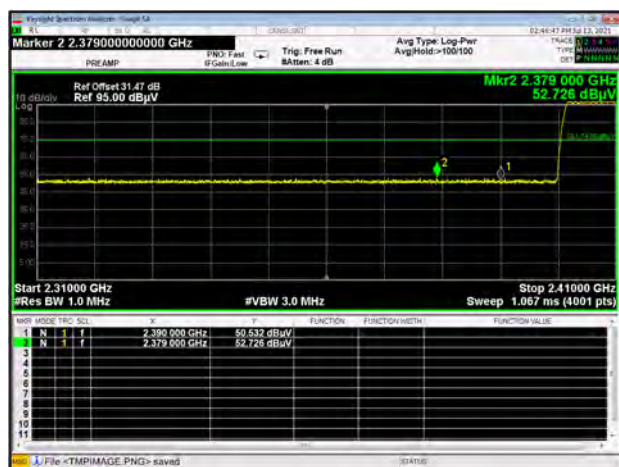


8-DPSK HIGH FREQUENCY BAND, PEAK




ESP module

GFSK LOW CHANNEL, PEAK

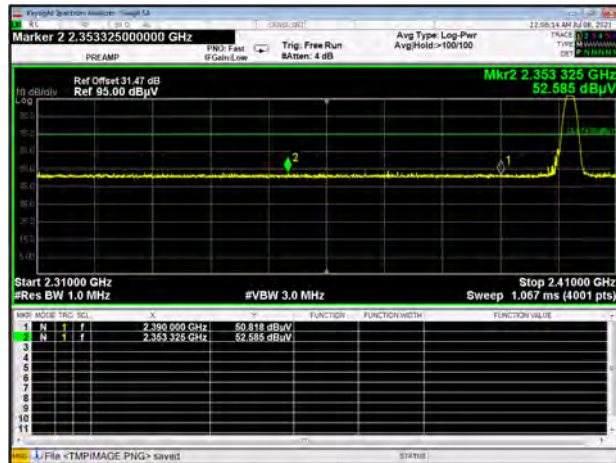


GFSK HIGH CHANNEL, PEAK

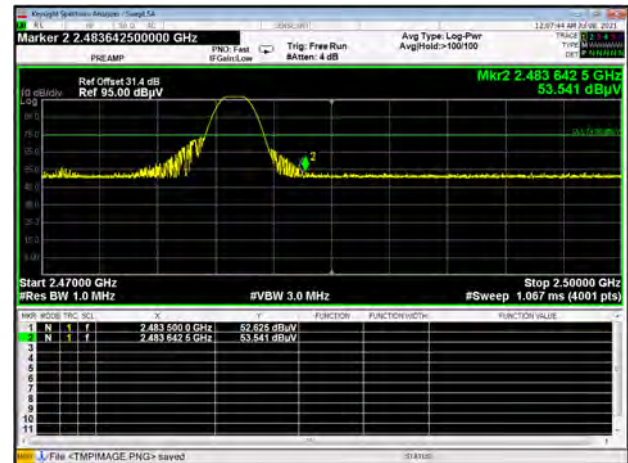

8-DPSK LOW CHANNEL, PEAK



8-DPSK HIGH CHANNEL, PEAK

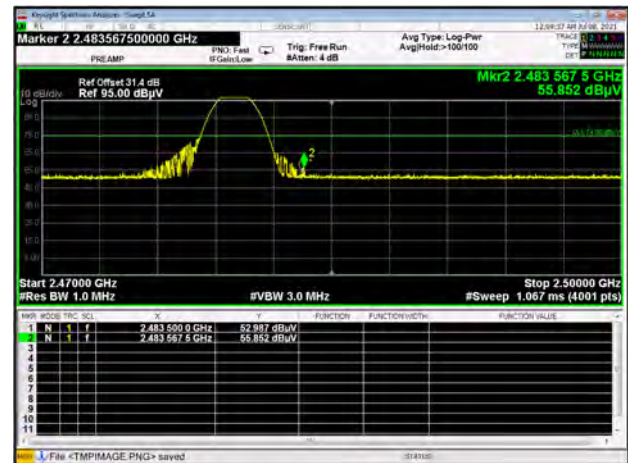

8-DPSK HIGH CHANNEL, AV1




8-DPSK HIGH CHANNEL, AV2



Hopping Mode:


GFSK LOW FREQUENCY BAND, PEAK

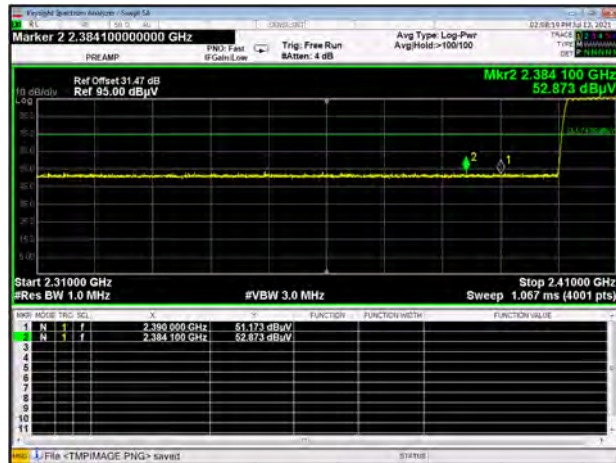

GFSK HIGH FREQUENCY BAND, PEAK



8-DPSK LOW FREQUENCY BAND, PEAK

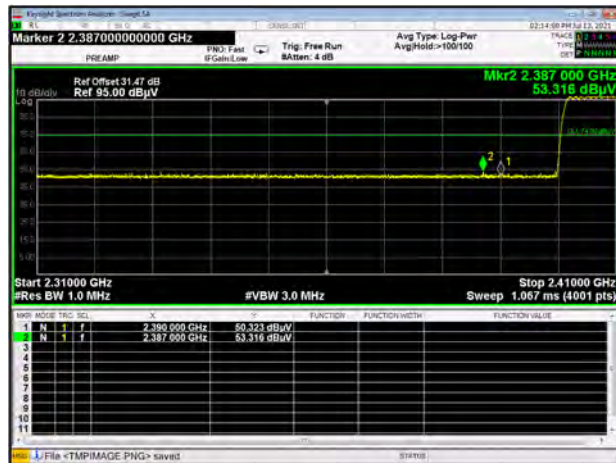

8-DPSK HIGH FREQUENCY BAND, PEAK



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2160056-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2160056-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2160056-AI.PDF".

--END OF REPORT--