



RF Exposure Evaluation Report

APPLICANT	Rider Alert Technology, LLC
ADDRESS	114 Holly Avenue Staten Island NY 10308
FCC ID	2AXDXRAT143
MODEL NUMBER	RAT143
PRODUCT DESCRIPTION	DTS MODULE
DATE SAMPLE RECEIVED	8/20/2020
FINAL TEST DATE	8/20/2020
PREPARED BY	Tim Royer
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
3045-20 MPETestReport_	Rev1	Initial Issue	9/11/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
ANTENNA INFORMATION	3
MPE CALCULATION.....	4
MPE LIMITS.....	4
MPE TABLE	5
GENERAL UNCONTROLLED EXPOSURE.....	5
GENERAL CONTROLLED EXPOSURE	6

GENERAL REMARKS

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Prepared by:




Name and Title	Tim Royer, Project Manager / EMC Engineer
Date	9/11/2019

GENERAL INFORMATION

EUT Description	Rider Alert		
Model Number	RAT143		
EUT Power Source	<input type="checkbox"/> 110-120Vac, 50-60Hz	<input type="checkbox"/> DC Power (13.8 VDC)	<input checked="" type="checkbox"/> Battery Operated
Test Item	<input type="checkbox"/> Engineering Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input checked="" type="checkbox"/> Mobile	<input type="checkbox"/> Portable
Antenna Connector	None		
Test Conditions	The temperature was 26°C Relative humidity of 50%.		
Modification to the EUT	No Modification to EUT.		
Applicable Standards	FCC CFR 47 Part 2.1091		
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070		

ANTENNA INFORMATION

Antenna is Provided	Type	Max Gain (dBi)
No	n/a	0.0

RF POWER OUTPUT

Tuned Frequency (MHz)	Power Output (dBm)
915	21.42

Maximum Power Output: 0.1386 W.

MPE CALCULATION

The minimum separation distance is calculated as follows:


$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power density: } P_d(mW/cm^2) = \frac{E^2}{3770}$$

MPE LIMITS

Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)

Plane-wave Equivalent Power Density

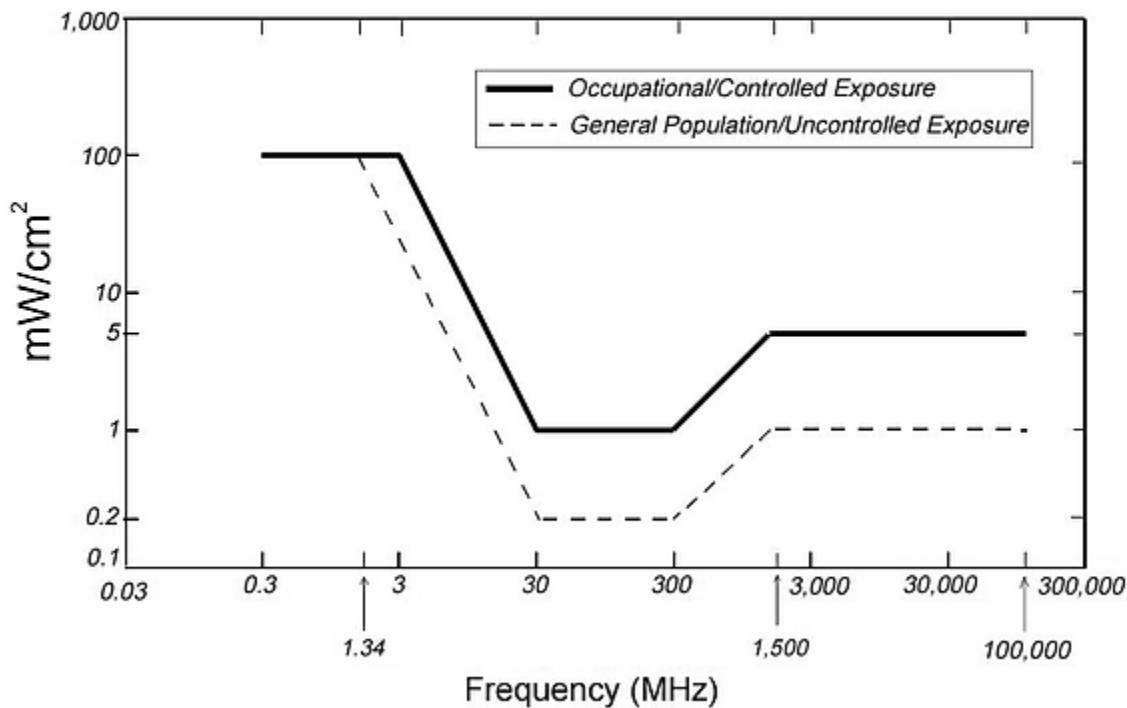


MPE Table

General Uncontrolled Exposure

The limit for General Uncontrolled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table B:

Variable	Value
Max Power	0.1386 W
Frequency Range	915 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	0.61 mW/cm ²
Minimum Separation Distance	4.25 cm

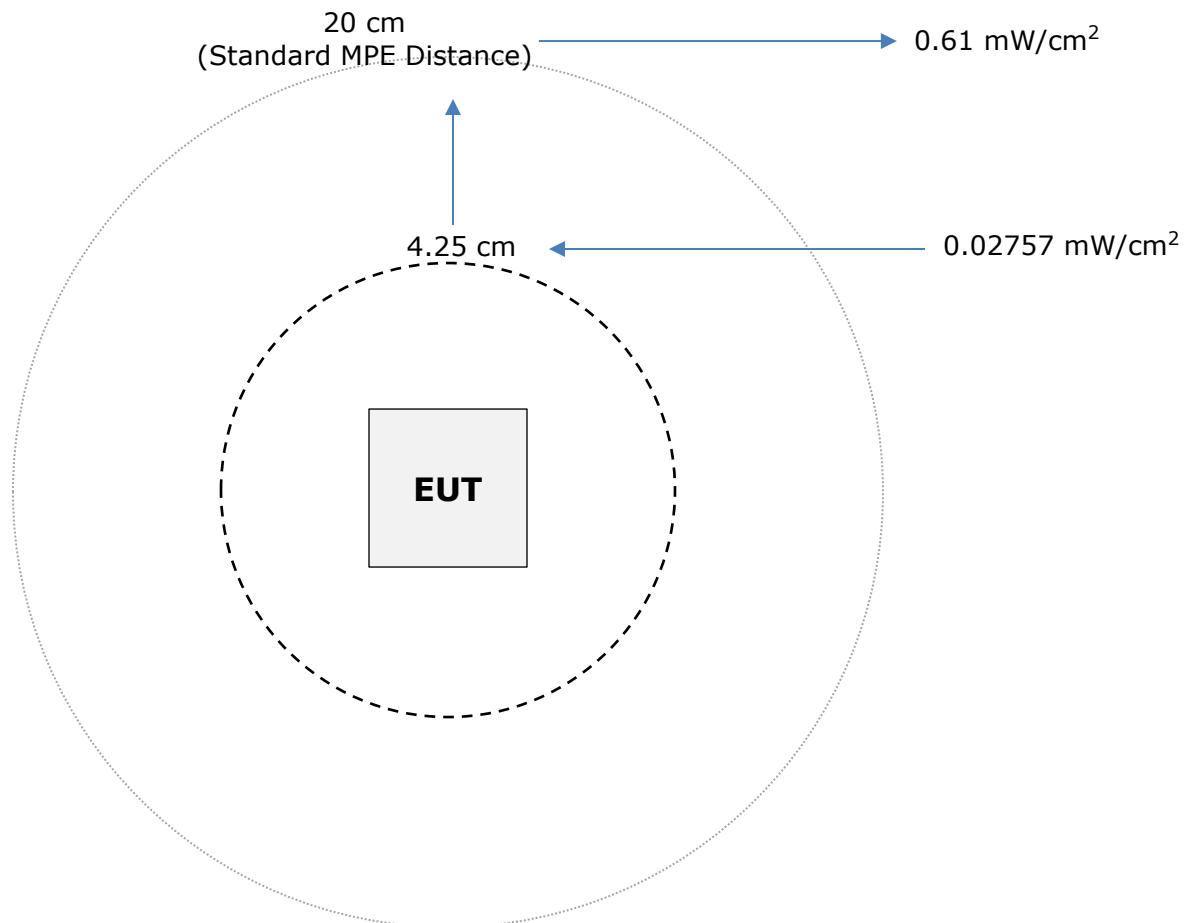

General Controlled Exposure

The limit for General Controlled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table A:

Variable	Value
Max Power	0.1386 W
Frequency Range	915 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	3.05 W/cm ²
Minimum Separation Distance	1.9 cm

