



Report No.: EA2008257F08001

1 of 83

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

WIFI module

Model No.: ZTK7628P-core-board

FCC ID: 2AXEE-ZTK7628P

Trademark: Jotale

Report No.: EA2008257F08001

Issue Date: September 04, 2020

Prepared for

Hangzhou Jotale Technology Co., Ltd

**Room 427, Zhuoxin Building, 3820 Nanhuan Road, Puyan Street,
Binjiang District, Hangzhou City, Zhejiang Province, China**

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake
Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr.,
China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE


Applicant:	Hangzhou Jotale Technology Co., Ltd Room 427, Zhuoxin Building, 3820 Nanhuan Road, Puyan Street, Binjiang District, Hangzhou City, Zhejiang Province, China
Manufacturer:	Hangzhou Jotale Technology Co., Ltd Room 427, Zhuoxin Building, 3820 Nanhuan Road, Puyan Street, Binjiang District, Hangzhou City, Zhejiang Province, China
Product Description:	WIFI module
Model Number:	ZTK7628P-core-board

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2019).

Date of Test :

August 20, 2020 to September 02, 2020



Prepared by :

Tomas Yang/Supervisor

Reviewer & Authorized
Signer :



Alan He/Manager



Report No.: EA2008257F08001

3 of 83

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	EA2008257F08001

Table of Contents

1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION.....	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE	7
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
3. DESCRIPTION OF TEST MODES	9
4. SUMMARY OF TEST RESULTS	12
5. TEST METHODOLOGY	12
6. TEST FACILITY.....	13
7. TEST SYSTEM UNCERTAINTY.....	14
8. CONDUCTED EMISSIONS TEST.....	15
8.1 MEASUREMENT PROCEDURE	15
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
8.3 MEASUREMENT EQUIPMENT USED.....	15
8.4 CONDUCTED EMISSION LIMIT	15
8.5 MEASUREMENT RESULT	16
9. RADIATED EMISSION TEST.....	18
9.1 MEASUREMENT PROCEDURE	18
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	19
9.3 MEASUREMENT EQUIPMENT USED.....	20
9.4 RADIATED EMISSION LIMIT.....	21
9.5 MEASUREMENT RESULT	22
10. 6DB BANDWIDTH TEST.....	27
10.1 MEASUREMENT PROCEDURE	27
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
10.3 MEASUREMENT EQUIPMENT USED	27
10.4 MEASUREMENT RESULTS	27
11. MAXIMUM PEAK OUTPUT POWER TEST	44
11.1 MEASUREMENT PROCEDURE.....	44
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	44
11.3 MEASUREMENT EQUIPMENT USED.....	44
11.4 PEAK POWER OUTPUT LIMIT	44
11.5 MEASUREMENT RESULTS	45
12. BAND EDGE TEST	46
12.1 MEASUREMENT PROCEDURE	46
12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	47
12.3 MEASUREMENT EQUIPMENT USED	47
12.4 MEASUREMENT RESULTS	47
13. MAXIMUM POWER SPECTRAL DENSITY	56
13.1 TEST EQUIPMENT	56
13.2 MEASURING INSTRUMENTS AND SETTING.....	56
13.3 TEST PROCEDURES.....	56
13.4 BLOCK DIAGRAM OF TEST SETUP.....	56

13.5 LIMIT	57
13.6 TEST RESULT	57
14. ANTENNA PORT EMISSION.....	73
14.1 TEST EQUIPMENT	73
14.2 MEASURING INSTRUMENTS AND SETTING.....	73
14.3 TEST PROCEDURES	73
14.4 BLOCK DIAGRAM OF TEST SETUP.....	73
14.5 TEST RESULT	73
15. ANTENNA APPLICATION.....	83
15.1 ANTENNA REQUIREMENT	83
15.2 RESULT	83
16. PHOTOS OF EUT	83

1. General Information

1.1 Product Description

Characteristics	Description
Product Name	WIFI module
Model number	ZTK7628P-core-board
Power Supply	DC 3.3V
Test Power Supply	DC 5V from Adapter
IEEE 802.11 WLAN Mode Supported	☒ 802.11b(20MHz channel bandwidth) ☒ 802.11g(20MHz channel bandwidth) ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth)
MIMO Mode	802.11n(HT20), 802.11n(HT40)
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Transmit Power Max	20.89dBm for 802.11b; 19.07dBm for 802.11g; 21.219dBm for 802.11n(HT20); 21.925 dBm for 802.11n(HT40);
Antenna Type	2TX2RX
Antenna Port	☒ Ant1; ☒ Ant2;
Smart system	☒ SISO for 802.11b/g ☒ MIMO for 802.11n
Antenna Gain	5dBi (for per antenna port Max) 8dBi for MIMO(Ant1+Ant2 Directional Gain)
Antenna Type	Dipole antenna
Antenna Connector	IPEX ANT Connector

Note: for more details, please refer to the User's manual of the EUT.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

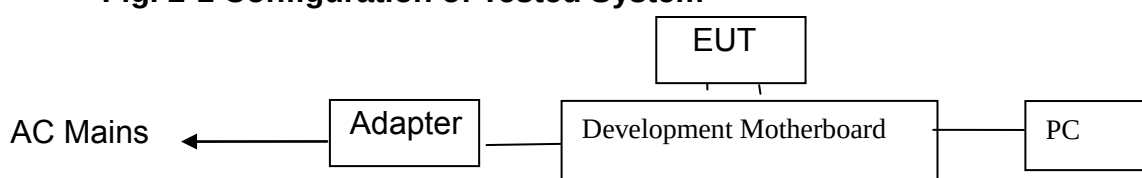


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	WIFI module	Jotale	ZTK7628P-core-board	2AXEE-ZTK7628P	EUT
2.	Adapter	N/A	GA-0502000	N/A	<i>Support Equipment</i>
3.	Development Motherboard	Jotale	JS7628_base_board_v1.5.1	N/A	<i>Support Equipment</i>
4.	PC	DELL	LATITUDE E5440	N/A	<i>Support Equipment</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting mode is programmed. EUT is connected by com port, and transmit the control instruction via test software(QATool_Dbg.exe).

Frequency and Channel list for 802.11 b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11 n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

Report No.: EA2008257F08001


10 of 83

Operated Mode for Worst Duty cycle:


We tested antenna A and antenna B. The test results are similar, the worst test data for Antenna A:
Duty Cycle:

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
802.11b	2412	99.96	0
802.11b	2437	99.93	0
802.11b	2462	99.96	0
802.11g	2412	99.48	0.02
802.11g	2437	99.54	0.02
802.11g	2462	99.75	0.01
802.11n(HT20)	2412	99.74	0.01
802.11n(HT20)	2437	99.66	0.01
802.11n(HT20)	2462	99.71	0.01
802.11n(HT40)	2422	99.38	0.03
802.11n(HT40)	2437	99.22	0.03
802.11n(HT40)	2452	99.32	0.03

All the modulation modes were tested the data of the worst mode (TX 802.11n HT40) are recorded in the following pages:

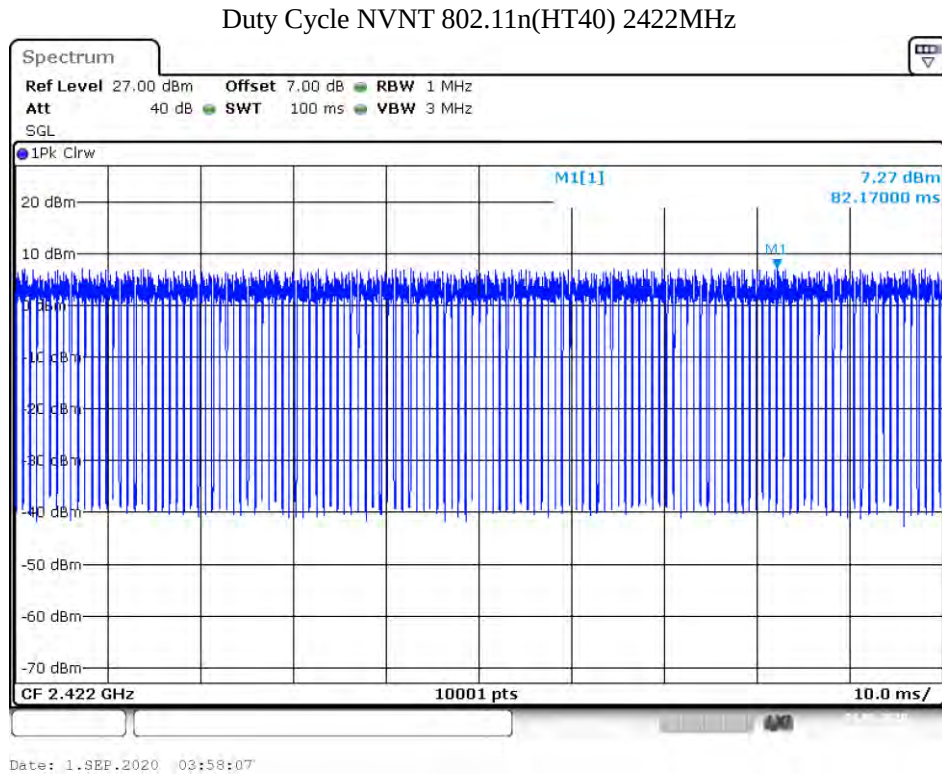


Duty Cycle NVNT 802.11n(HT40) 2437MHz

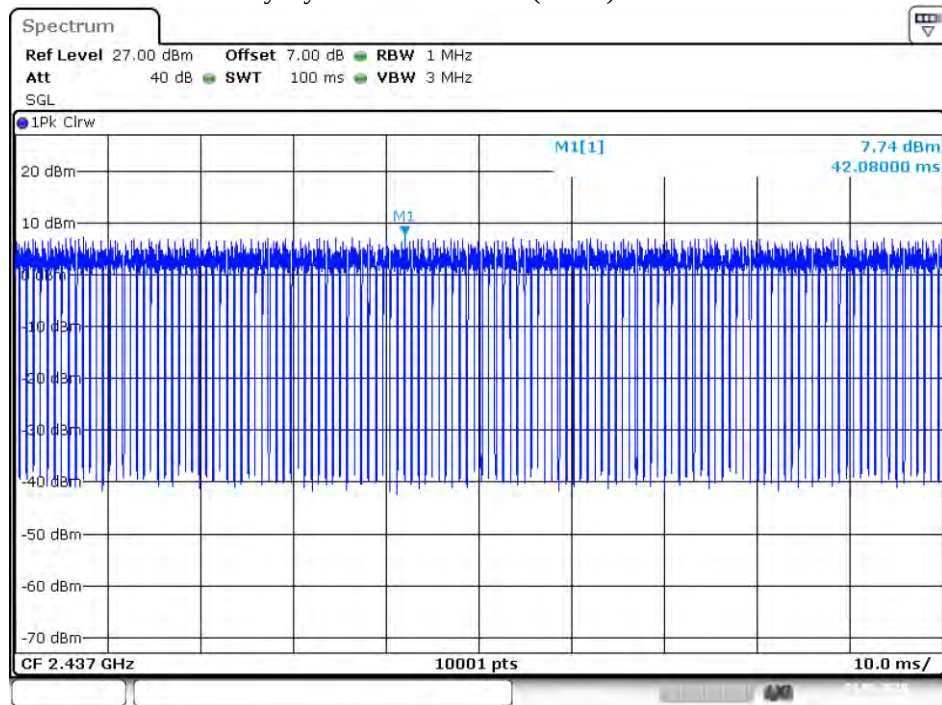

Date: 1.SEP.2020 04:12:05

Duty Cycle NVNT 802.11n(HT40) 2452MHz

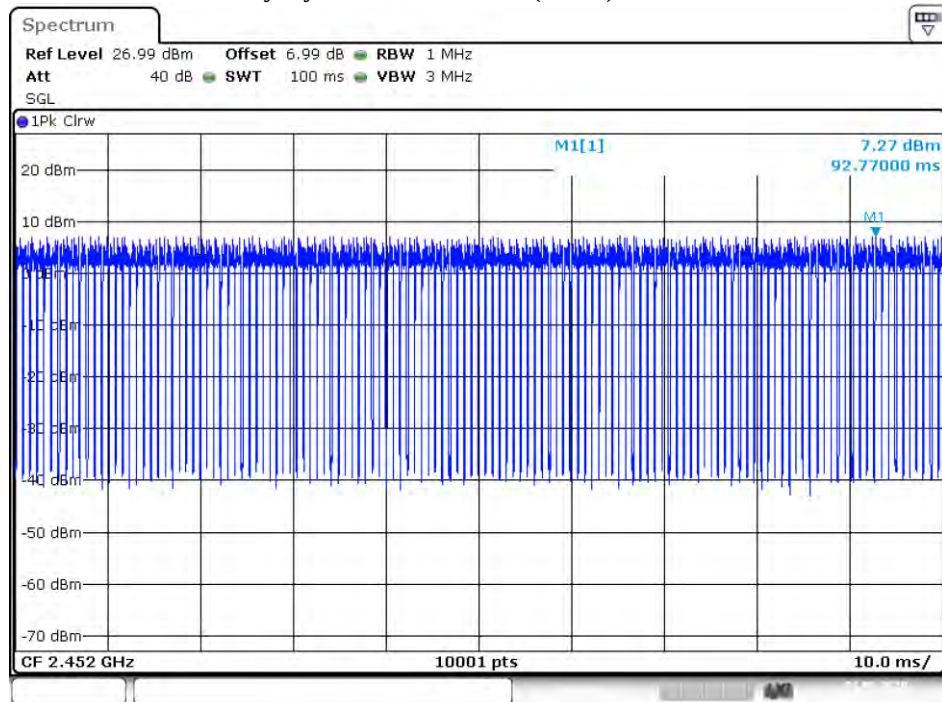

Date: 1.SEP.2020 04:17:53

4. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	Pass
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AXEE-ZTK7628P filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

5. Test Methodology

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

6. Test Facility

Site Description

EMC Lab : Accredited by CNAS, 2017.06.26
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be
in compliance with CNAS-CL01:2006 (identical to
ISO/IEC 17025:2005)
The Certificate Registration Number is L6214.

Accredited by A2LA, 2018.03.15
The Certificate Number is 4422.01.

Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.
1-2 Floor, Building A, No.11, Headquarters 2 Road,
Songshan, Lake Hi-tech Industrial Development
Zone, Dongguan City, Guangdong Pr., China.

7. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%

8. Conducted Emissions Test

8.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

8.2 Test SET-UP (Block Diagram of Configuration)

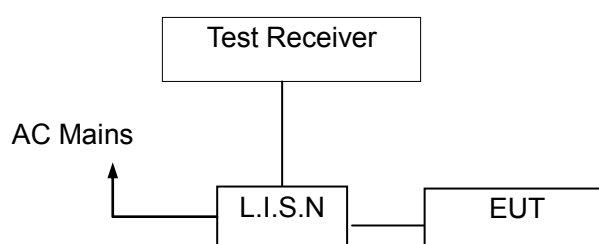

8.3 Measurement Equipment Used

Conducted Emission Test Site				
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2021-05-18
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2021-05-18
RF Cable	N/A	N/A	2#	2021-05-18
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2021-05-18
Shielded Room	chengyu	8m*4m*3m	N/A	2021-05-18
Test Software	Farad	EZ-EMC Ver:ANCI-8A1	N/A	N/A

8.4 Conducted Emission Limit

**Conducted Emission
Frequency(MHz)**

0.15-0.5

0.5-5.0

5.0-30.0

Quasi-peak

66-56

56

60

Average

56-46

46


50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.5 Measurement Result


All the modulation modes were tested the data of the worst mode (TX 802.11n HT40 MIMO 2452MHz) are recorded in the following pages and the others modulation methods do not exceed the limits. Please refer to following pages.

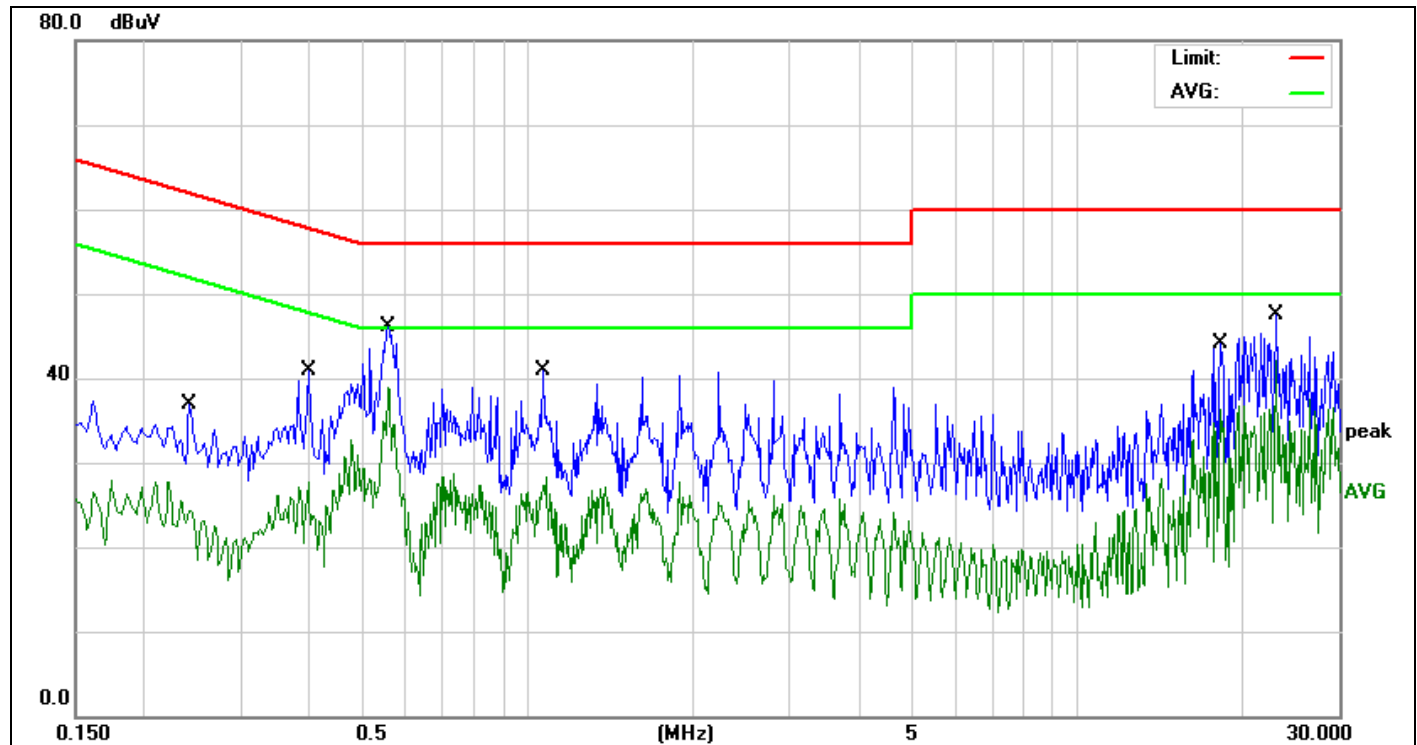

Site:	843	Phase:	L1	Temperature(C):	26(C)
Limit:	FCC PART 15C Conduction(QP)	Test Time:	2020-08-20	Humidity(%):	60%
EUT:	WIFI module	Power Rating:	AC 120V/60Hz	Test Engineer:	Sunshine
M/N.:	ZTK7628P-core-board				
Mode:	WIFI TX2452				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.2420	20.85	10.11	30.96	62.02	-31.06	QP	
2	0.2420	12.57	10.11	22.68	52.02	-29.34	AVG	
3	0.3980	23.80	10.11	33.91	57.89	-23.98	QP	
4	0.3980	14.65	10.11	24.76	47.89	-23.13	AVG	
5	0.5580	34.73	10.12	44.85	56.00	-11.15	QP	
6 *	0.5580	28.70	10.12	38.82	46.00	-7.18	AVG	
7	1.0660	22.92	10.14	33.06	56.00	-22.94	QP	
8	1.0660	12.89	10.14	23.03	46.00	-22.97	AVG	
9	18.2420	31.85	11.12	42.97	60.00	-17.03	QP	
10	18.2420	24.69	11.12	35.81	50.00	-14.19	AVG	
11	23.1299	34.32	11.29	45.61	60.00	-14.39	QP	
12	23.1299	30.88	11.29	42.17	50.00	-7.83	AVG	

*:Maximum data x:Over limit !:over margin

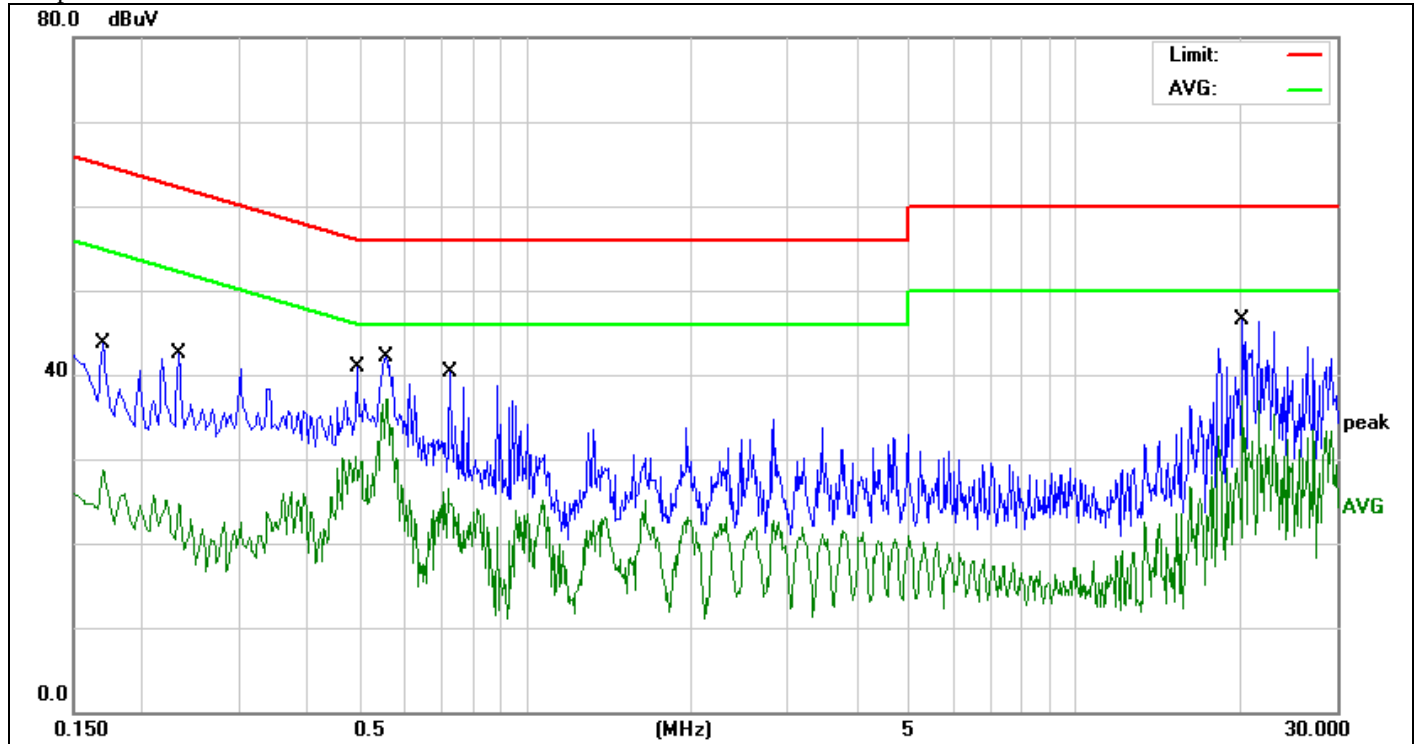

Site:	843	Phase:	N	Temperature(C):	26(C)
Limit:	FCC PART 15C Conduction(QP)	Test Time:	2020-08-20	Humidity(%):	60%
EUT:	WIFI module	Power Rating:	AC 120V/60Hz	Test Engineer:	Sunshine
M/N.:	ZTK7628P-core-board				
Mode:	WIFI TX2452				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1700	22.44	10.11	32.55	64.96	-32.41	QP	
2	0.1700	10.90	10.11	21.01	54.96	-33.95	AVG	
3	0.2340	24.56	10.11	34.67	62.30	-27.63	QP	
4	0.2340	12.62	10.11	22.73	52.30	-29.57	AVG	
5	0.4940	21.81	10.12	31.93	56.10	-24.17	QP	
6	0.4940	16.15	10.12	26.27	46.10	-19.83	AVG	
7	0.5580	30.74	10.12	40.86	56.00	-15.14	QP	
8 *	0.5580	26.99	10.12	37.11	46.00	-8.89	AVG	
9	0.7300	22.39	10.13	32.52	56.00	-23.48	QP	
10	0.7300	12.09	10.13	22.22	46.00	-23.78	AVG	
11	20.2580	32.07	11.24	43.31	60.00	-16.69	QP	
12	20.2580	25.67	11.24	36.91	50.00	-13.09	AVG	

*:Maximum data x:Over limit !:over margin

9. Radiated Emission Test

9.1 Measurement Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	120KHz
VBW	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	10Hz
Detector	Peak
Trace	Max hold

9.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

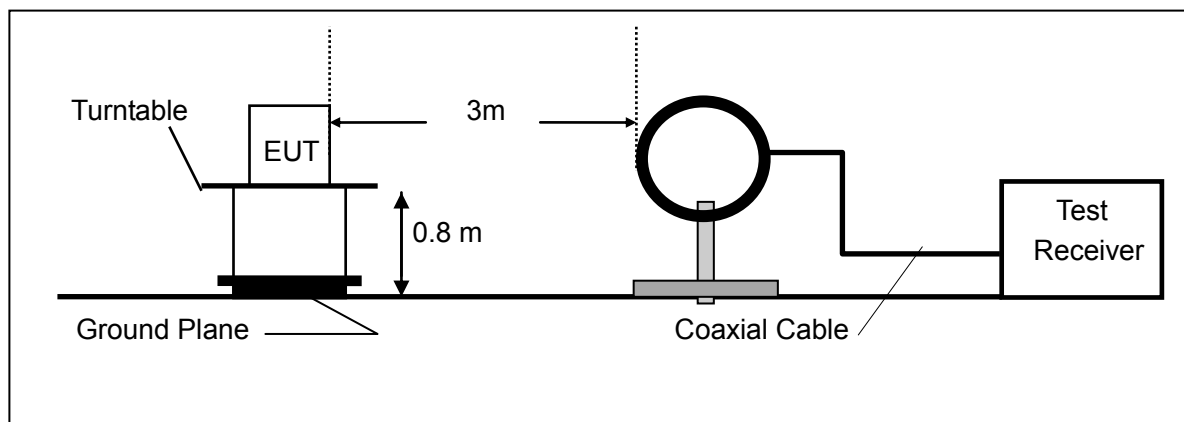

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

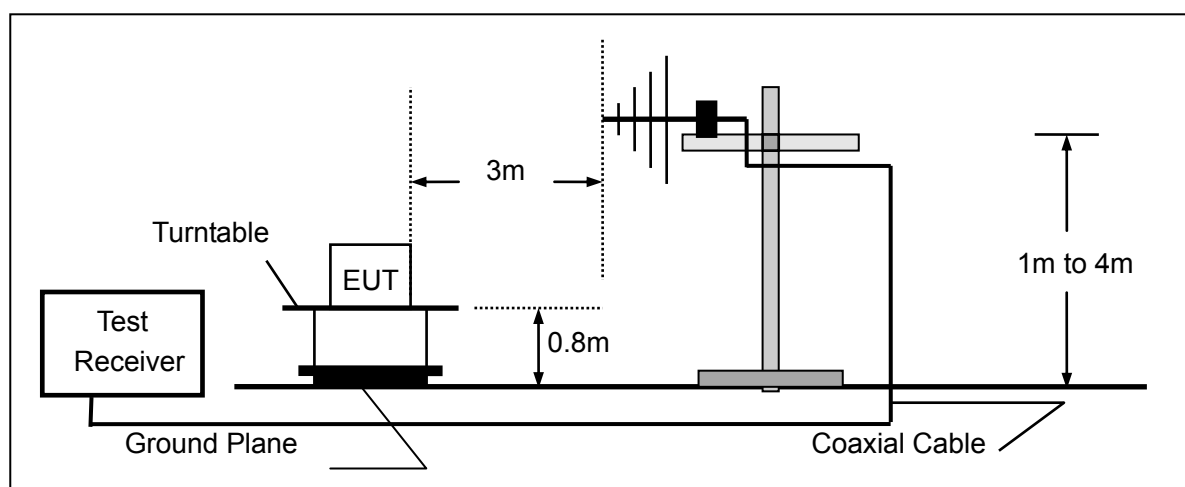

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

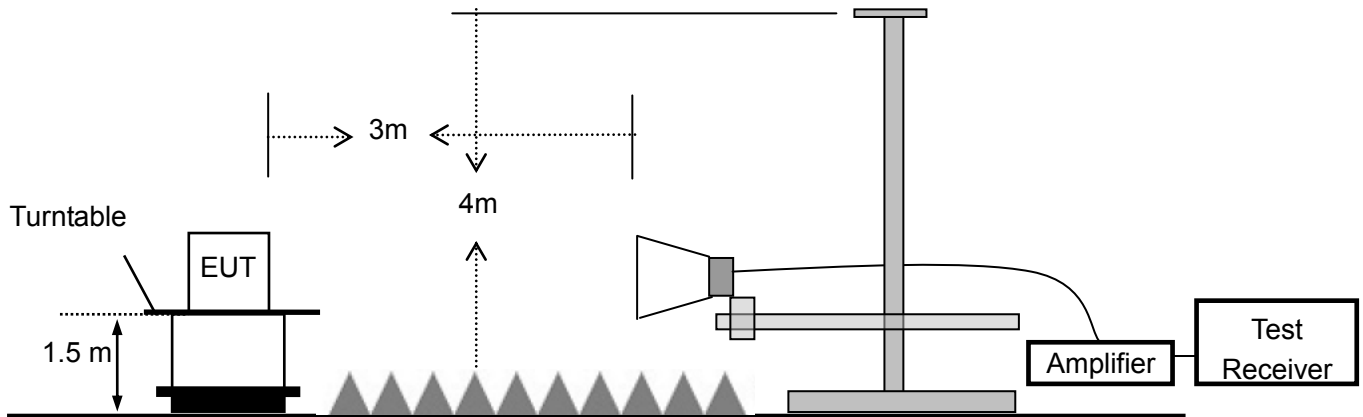

9.3 Measurement Equipment Used

tem	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2020-11-28
2.	Pre-Amplifier	HP	8447D	2727A06172	2021-05-18
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2021-05-18
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2020-11-28
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
6.	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2021-05-18
7.	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2021-05-18
8.	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX10 0KHz-40GHz	J101313052400 1	2020-11-28
9.	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J203109061212 3	2020-11-28
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-2m	N/A	2020-11-28
11.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-0.3m	N/A	2020-11-28
12.	RF Cable	N/A	N/A	6#	2021-05-18
13.	RF Cable	N/A	N/A	1-1#	2021-05-18
14.	RF Cable	N/A	N/A	1-2#	2021-05-18
15.	RF Cable	N/A	N/A	7#	2021-05-18
16.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2021-05-18
17.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

9.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

9.5 Measurement Result

Below 30MHz:

All the modulation modes were tested the data of the test mode are recorded in the following pages.

Operation Mode:	TX Mode	Test Date :	2020-08-25
Frequency Range:	9KHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	60 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Below 1000MHz:

All the modulation modes were tested the data of the worst mode (ANT1: 802.11b 2412MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following test plots:

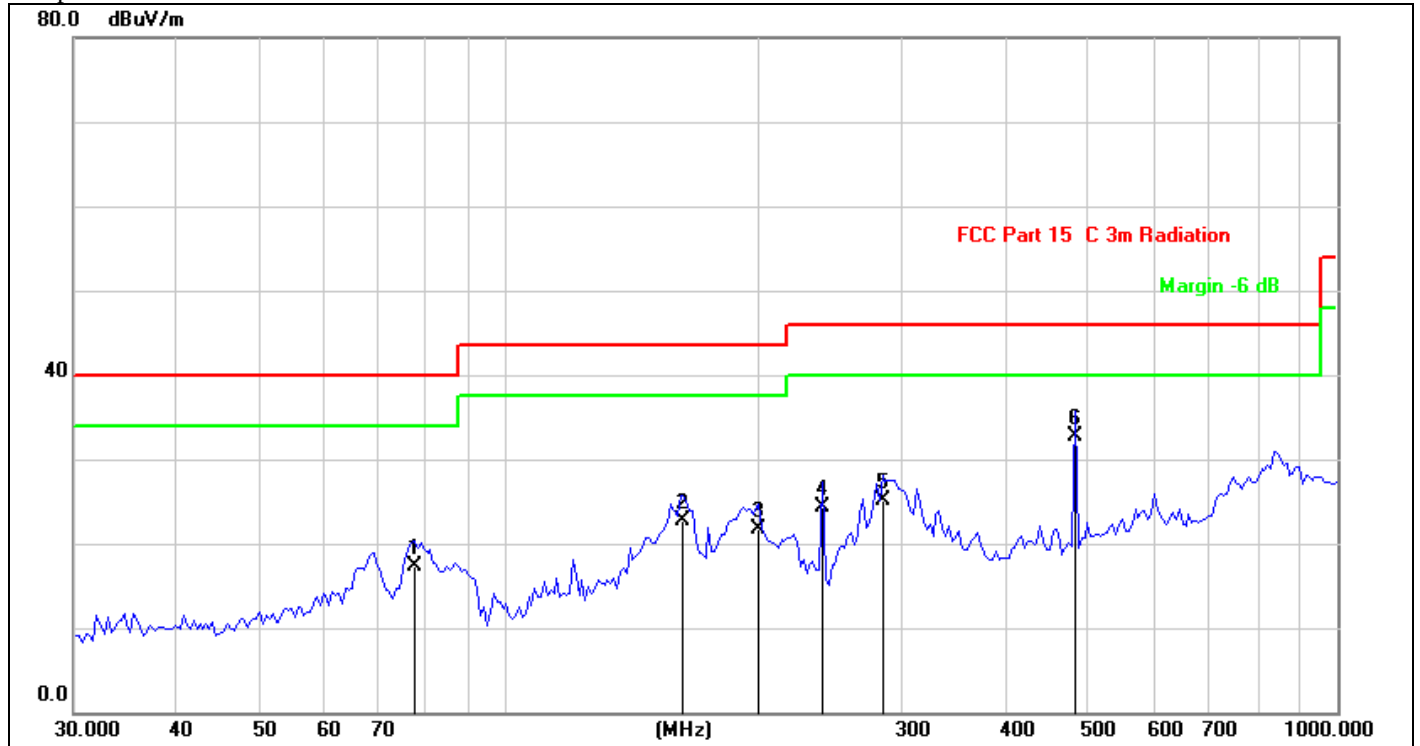

Site:	LAB	Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part 15 C 3m Radiation		Humidity(%):60%
EUT:	WIFI module	Test Time:	2020/08/36
M/N.:	ZTK7628P-core-board	Power Rating:	AC 120V/60Hz
Mode:	TX2412	Test Engineer:	Dyson
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	77.3212	35.24	-18.03	17.21	40.00	-22.79	QP	
2	162.8959	40.59	-17.82	22.77	43.50	-20.73	QP	
3	201.0402	37.73	-16.00	21.73	43.50	-21.77	QP	
4	239.5670	38.88	-14.51	24.37	46.00	-21.63	QP	
5	282.9852	38.20	-13.16	25.04	46.00	-20.96	QP	
6 *	483.0618	42.25	-9.58	32.67	46.00	-13.33	QP	

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

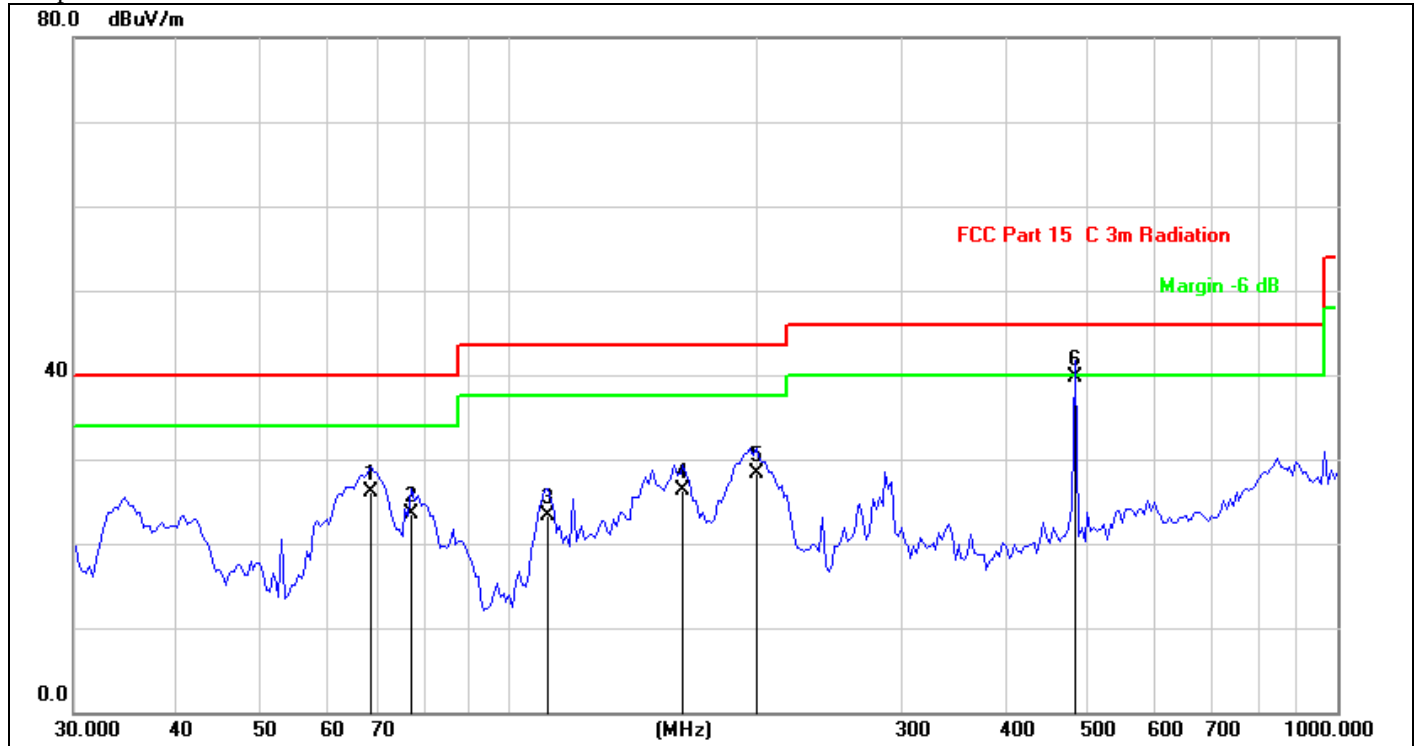

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation			Humidity(%):	60%
EUT:	WIFI module	Test Time:			2020/08/36
M/N.:	ZTK7628P-core-board	Power Rating:			AC 120V/60Hz
Mode:	TX2412	Test Engineer:			Dyson
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	68.3908	43.58	-17.48	26.10	40.00	-13.90	QP	
2	76.6463	41.47	-18.02	23.45	40.00	-16.55	QP	
3	110.7627	39.50	-16.24	23.26	43.50	-20.24	QP	
4	162.8959	44.19	-17.82	26.37	43.50	-17.13	QP	
5	199.2855	44.42	-16.11	28.31	43.50	-15.19	QP	
6 *	483.0618	49.28	-9.58	39.70	46.00	-6.30	QP	

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor



Report No.: EA2008257F08001

25 of 83

Above 1000MHz:

Operation Mode: 802.11b Lowest

Test Date : 2020-08-25

Test Voltage: AC 120V/60Hz

Test by: Andy

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4824	V	95.88	77.07	-32.3	63.58	44.77	74	54	-10.42	-9.23
7236	V	99.69	81.32	-37.2	62.49	44.12	74	54	-11.51	-9.88
9648	V	103.36	83.83	-39.8	63.56	44.03	74	54	-10.44	-9.97
12060	V	103.64	84.09	-40.5	63.14	43.59	74	54	-10.86	-10.41
14472	V	105.75	84.82	-41.7	64.05	43.12	74	54	-9.95	-10.88
16884	V	102.49	83.88	-40	62.49	43.88	74	54	-11.51	-10.12
4824	H	93.73	74.57	-31.6	62.13	42.97	74	54	-11.87	-11.03
7236	H	98.17	78.11	-35.5	62.67	42.61	74	54	-11.33	-11.39
9648	H	99.85	80.77	-38.3	61.55	42.47	74	54	-12.45	-11.53
12060	H	100.94	80.59	-39	61.94	41.59	74	54	-12.06	-12.41
14472	H	102.85	83.67	-42	60.85	41.67	74	54	-13.15	-12.33
16884	H	100.24	79.63	-39.3	60.94	40.33	74	54	-13.06	-13.67

Operation Mode: 802.11b Middle

Test Date : 2020-08-25

Test Voltage: AC 120V/60Hz

Test by: Andy

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4874	V	96.32	75.89	-32.3	64.02	43.59	74	54	-9.98	-10.41
7311	V	101.31	80.84	-37.2	64.11	43.64	74	54	-9.89	-10.36
9688	V	103.39	83.01	-39.8	63.59	43.21	74	54	-10.41	-10.79
12185	V	103.83	82.68	-40.5	63.33	42.18	74	54	-10.67	-11.82
14622	V	103.69	83.16	-41	62.69	42.16	74	54	-11.31	-11.84
17059	V	104.58	83.25	-41.1	63.48	42.15	74	54	-10.52	-11.85
4874	H	93.74	72.17	-31.6	62.14	40.57	74	54	-11.86	-13.43
7311	H	96.59	75.61	-35.5	61.09	40.11	74	54	-12.91	-13.89
9688	H	101.72	77.89	-38.3	63.42	39.59	74	54	-10.58	-14.41
12185	H	99.34	78.87	-39	60.34	39.87	74	54	-13.66	-14.13
14622	H	102.59	81.12	-42	60.59	39.12	74	54	-13.41	-14.88
17059	H	101.37	79.66	-41.5	59.87	38.16	74	54	-14.13	-15.84

Operation Mode: 802.11b Highest

Test Date : 2020-08-25

Test Voltage: AC 120V/60Hz

Test by: Andy

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4924	V	95.96	76.46	-32.3	63.66	44.16	74	54	-10.34	-9.84
7386	V	100.35	80.84	-37.2	63.15	43.64	74	54	-10.85	-10.36
9848	V	103.85	82.95	-39.8	64.05	43.15	74	54	-9.95	-10.85
12310	V	104.61	83.76	-40.5	64.11	43.26	74	54	-9.89	-10.74
14772	V	104.94	83.55	-41	63.94	42.55	74	54	-10.06	-11.45
17234	V	104.22	83.26	-41.1	63.12	42.16	74	54	-10.88	-11.84
4924	H	91.71	73.77	-31.6	60.11	42.17	74	54	-13.89	-11.83
7386	H	97.38	77.19	-35.5	61.88	41.69	74	54	-12.12	-12.31
9848	H	99.43	78.64	-38.3	61.13	40.34	74	54	-12.87	-13.66
12310	H	99.32	79.22	-39	60.32	40.22	74	54	-13.68	-13.78
14772	H	101.58	83.19	-42	59.58	41.19	74	54	-14.42	-12.81
17234	H	100.29	82.39	-41.5	58.79	40.89	74	54	-15.21	-13.11

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
- (3) Data of measurement within this frequency range shown “ – ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


10. 6dB Bandwidth Test

10.1 Measurement Procedure

The EUT was operating in IEEE 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequency) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results

6 Bandwidth Test Data Chart:

Refer to attached data chart.


Report No.: EA2008257F08001



28 of 83

Spectrum Detector: PK
 Test By: Andy
 Humidity : 60%


Test Date : September 01, 2020
 Temperature : 28°C



IEEE 802.11b SISO Ant1			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	9.860	>500	Pass
2437	9.064	>500	
2462	9.848	>500	

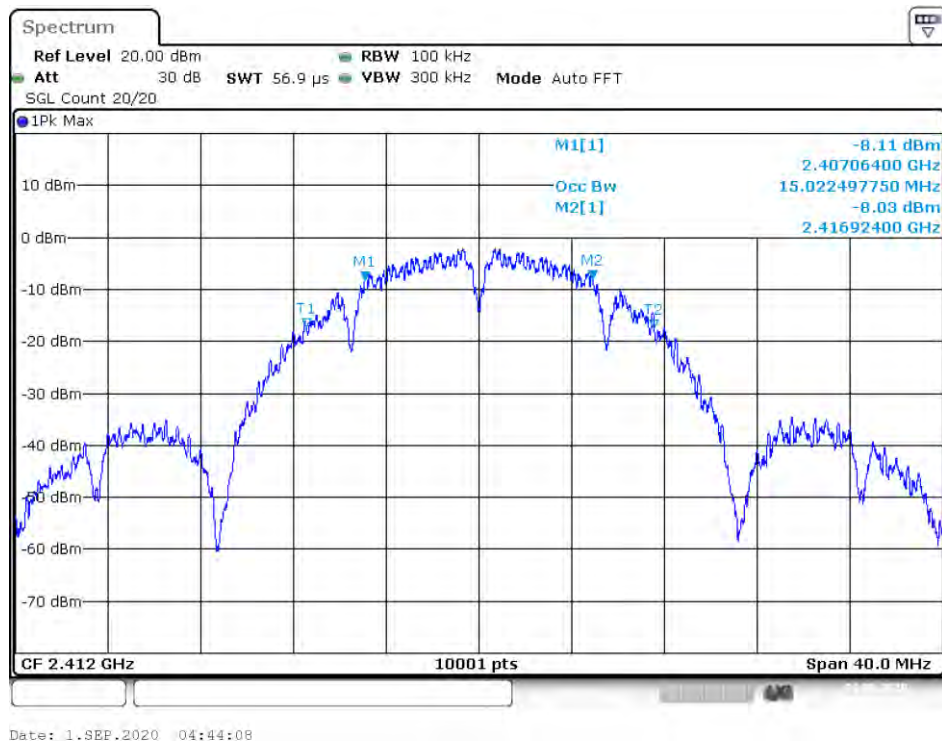

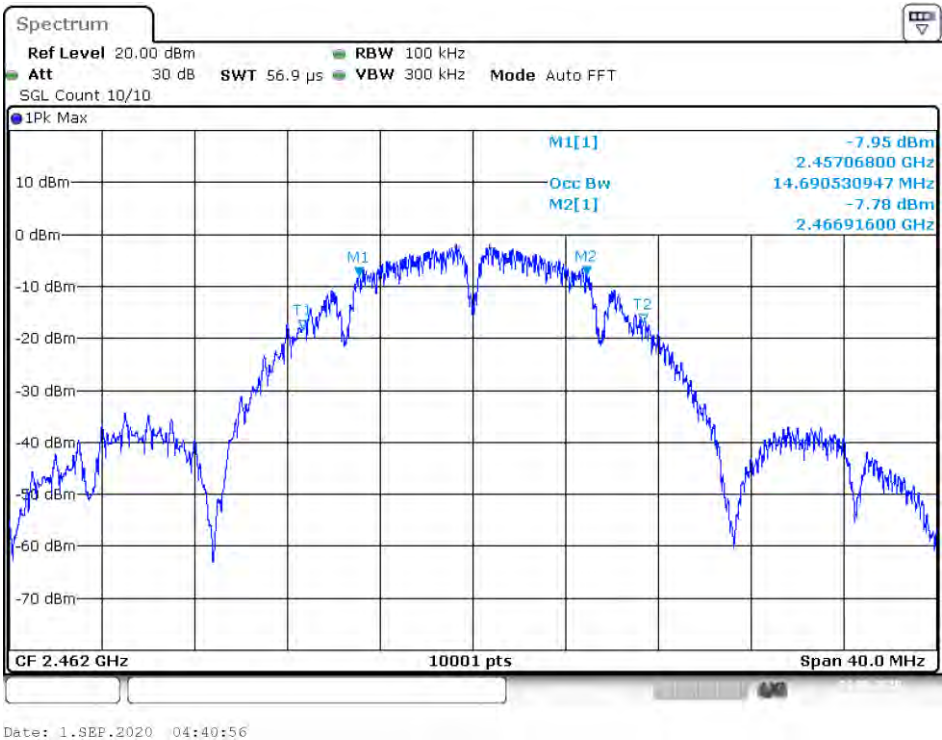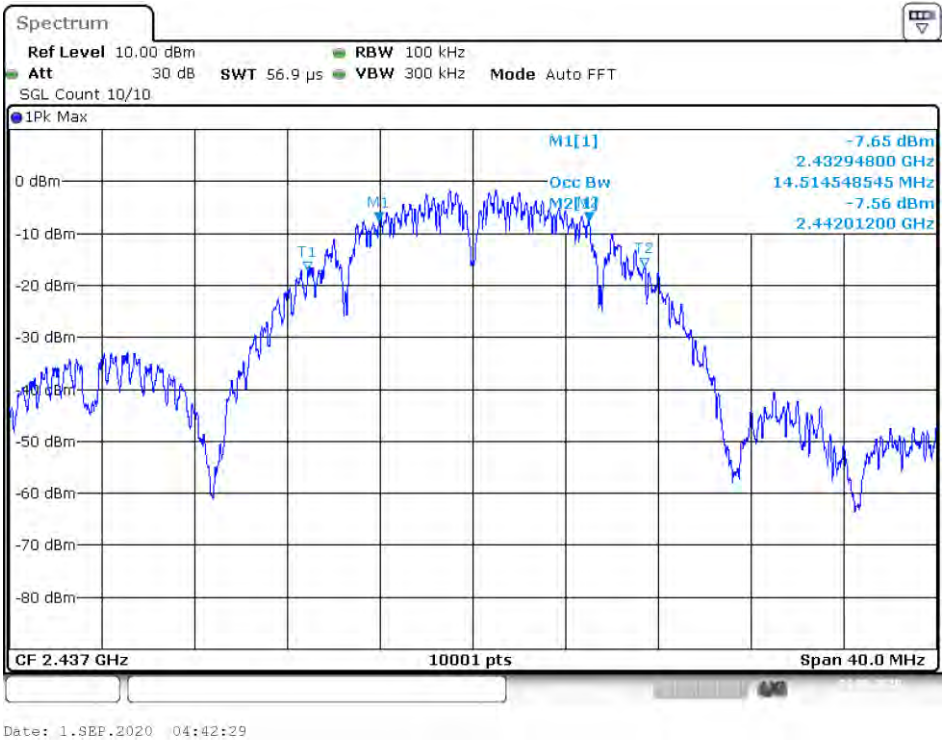

IEEE 802.11b SISO Ant2			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	10.052	>500	Pass
2437	9.720	>500	
2462	9.644	>500	

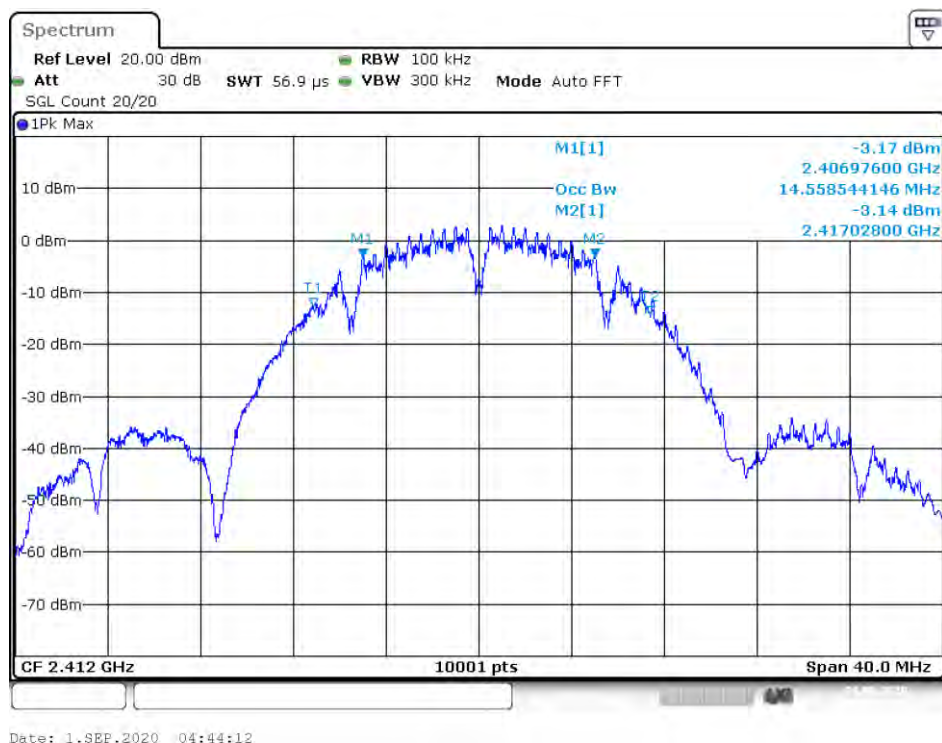


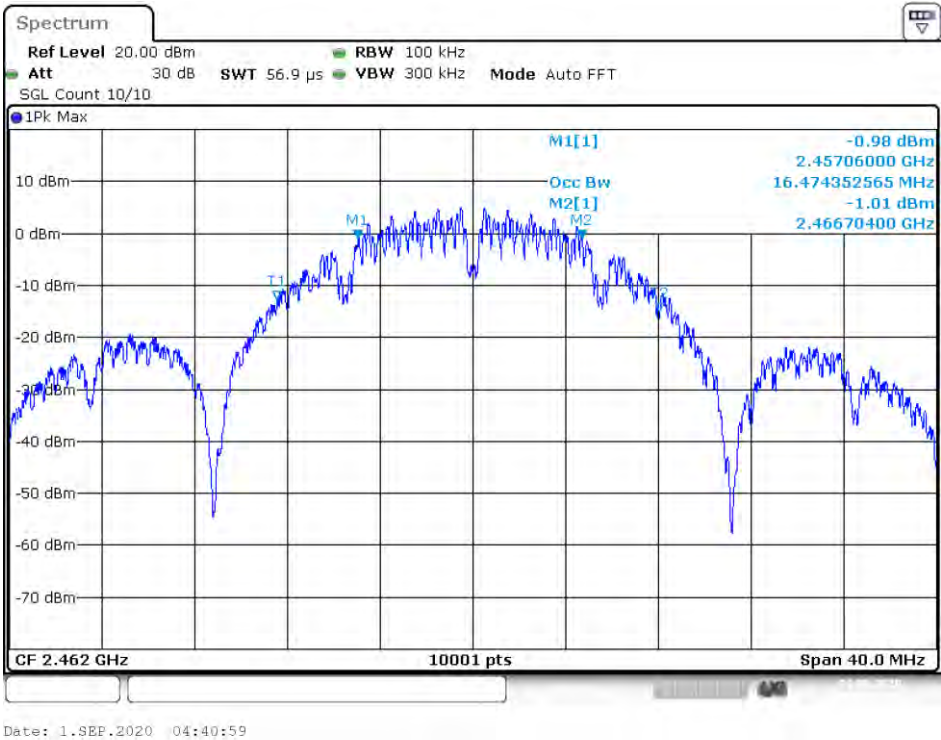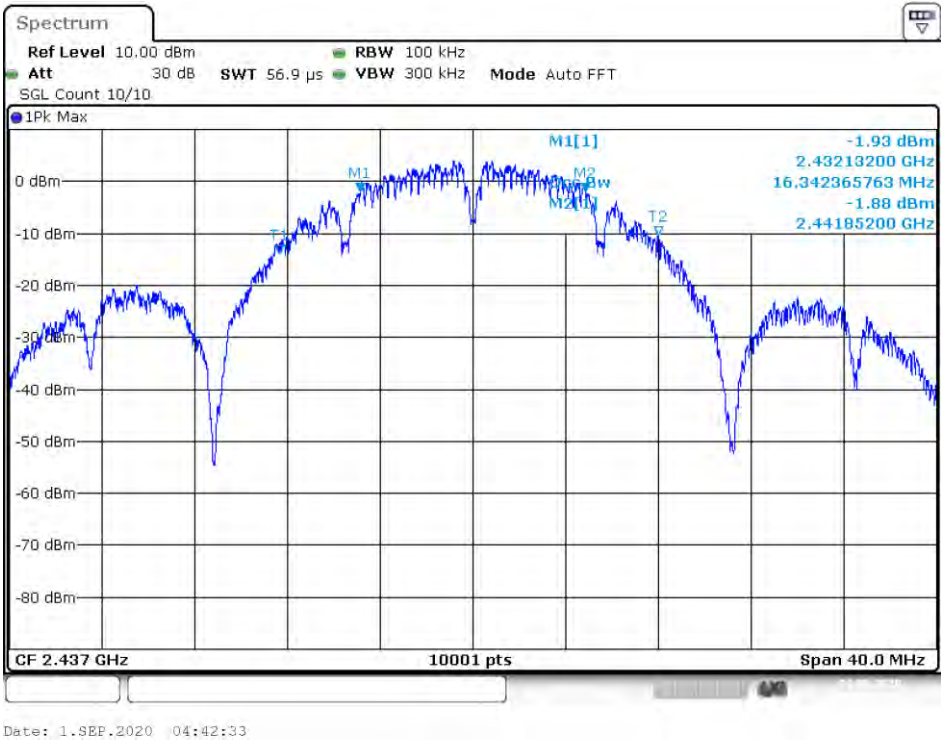



Report No.: EA2008257F08001

32 of 83

IEEE 802.11g SISO Ant1			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	16.164	>500	Pass
2437	16.296	>500	
2462	15.32	>500	

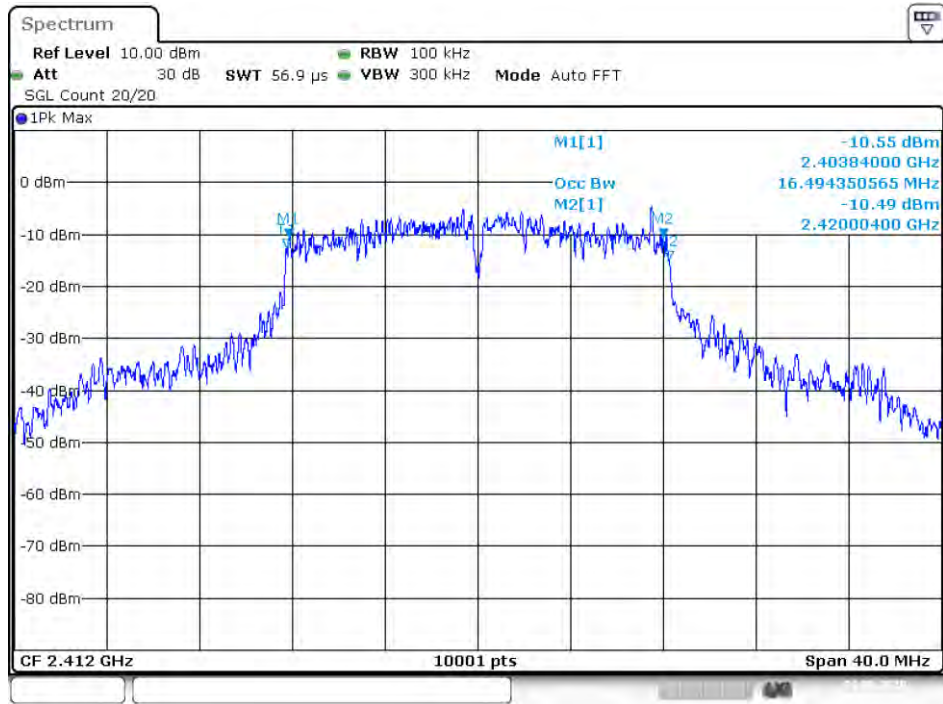


Date: 1.SEP.2020 04:38:10

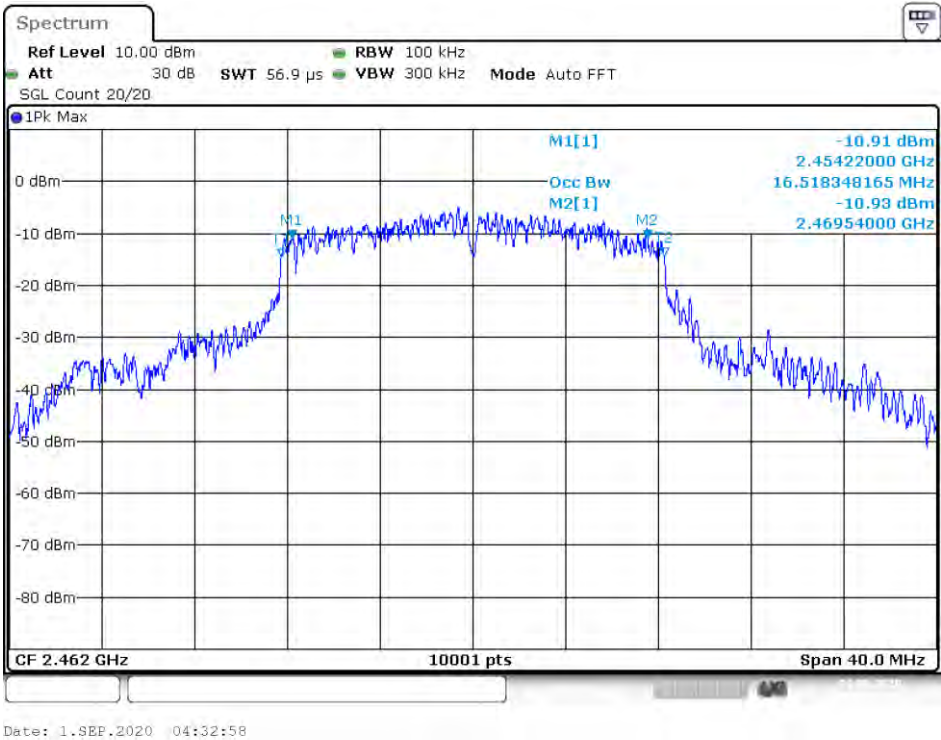
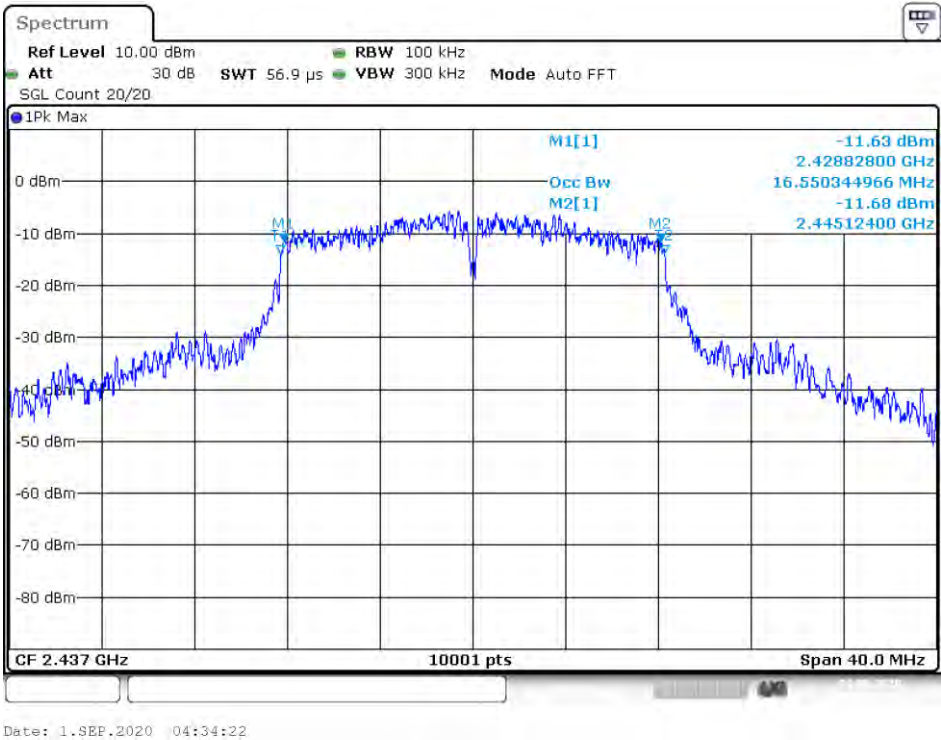


34 of 83

IEEE 802.11g SISO Ant2			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	15.724	>500	Pass
2437	16.324	>500	
2462	16.340	>500	

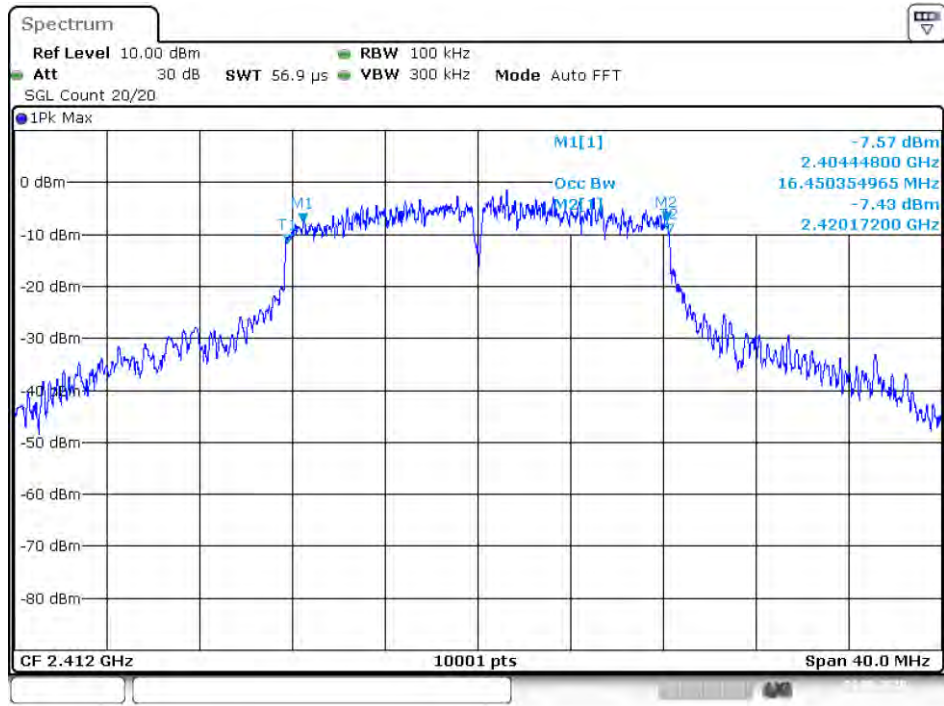




Date: 1.SEP.2020 04:38:14

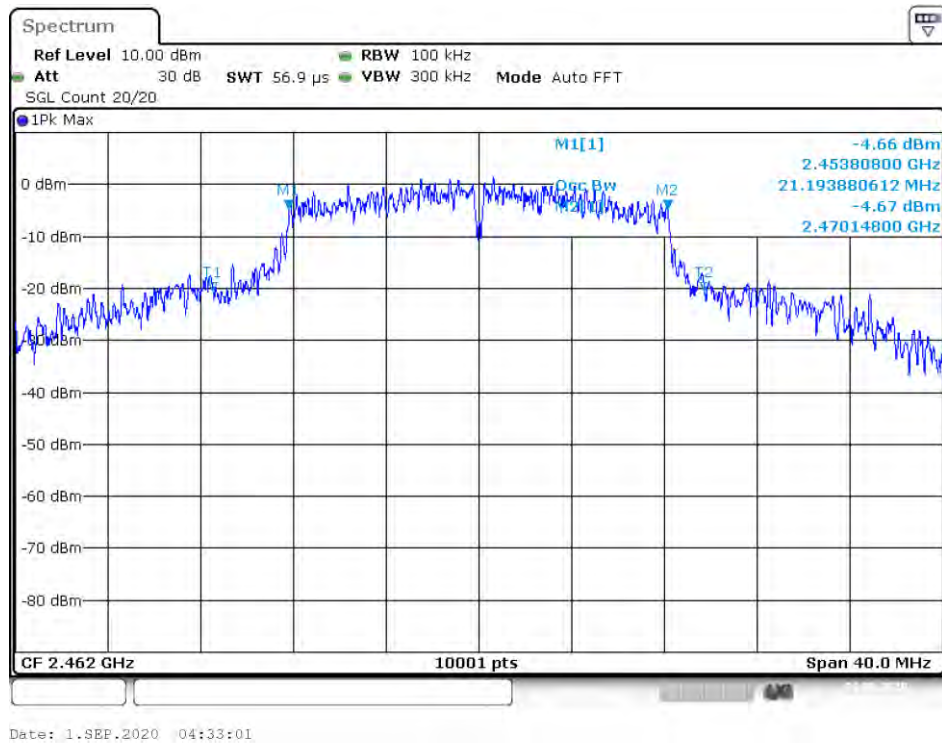
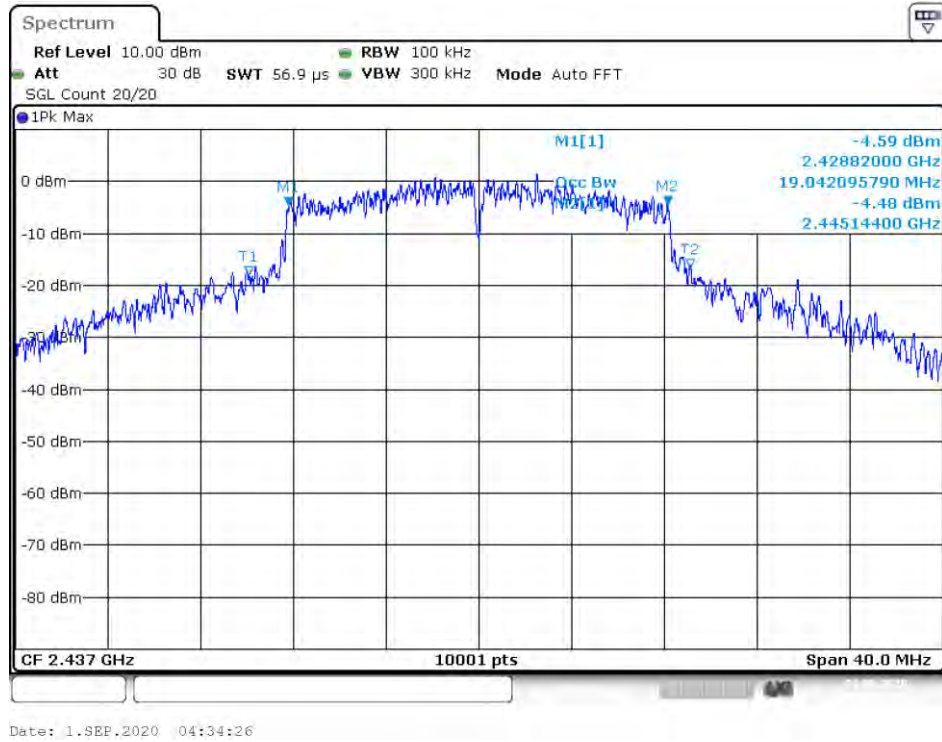



IEEE 802.11n(HT20) MIMO				
Channel frequency (MHz)	Measurement level (MHz)		Required Limit (KHz)	Result
	Ant1	Ant2		
2412	17.540	17.552	>500	Pass
2437	17.304	17.560	>500	
2462	17.560	17.252	>500	

Ant1

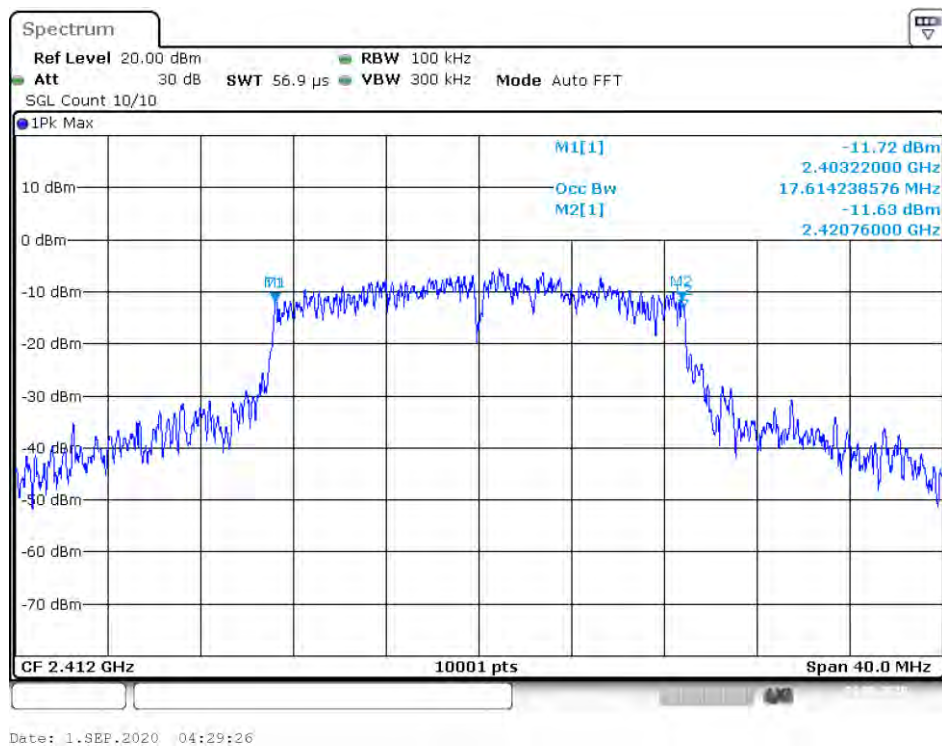

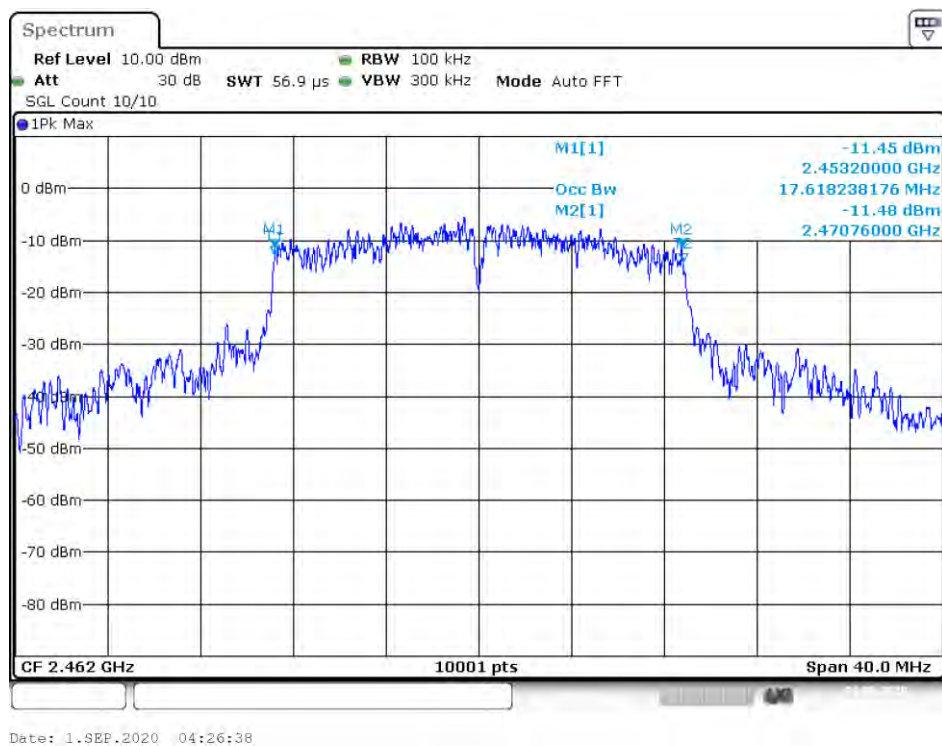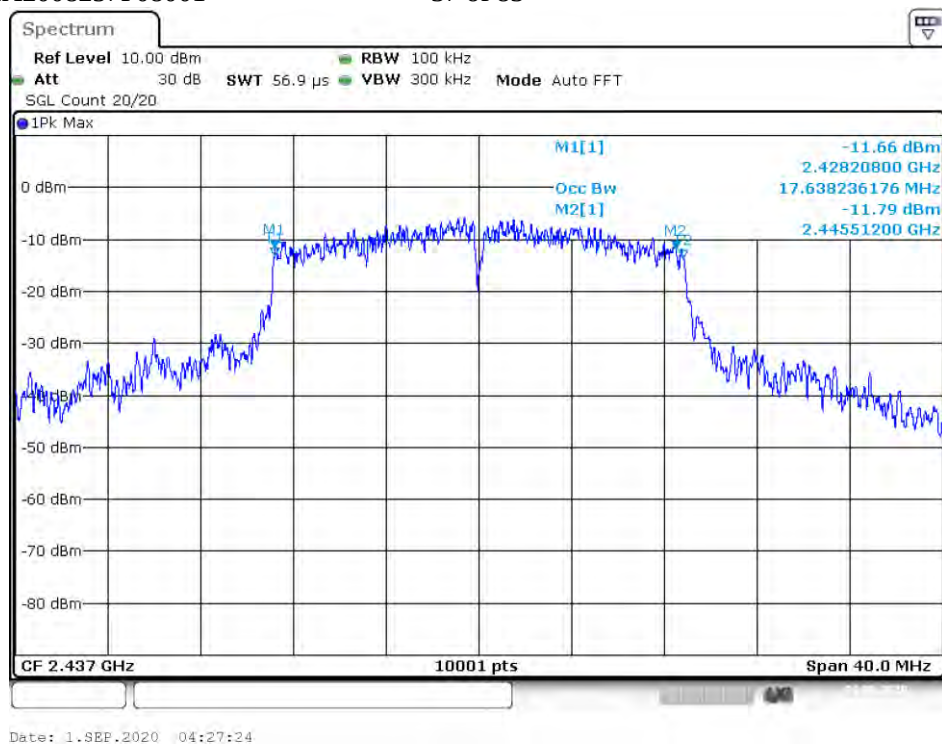

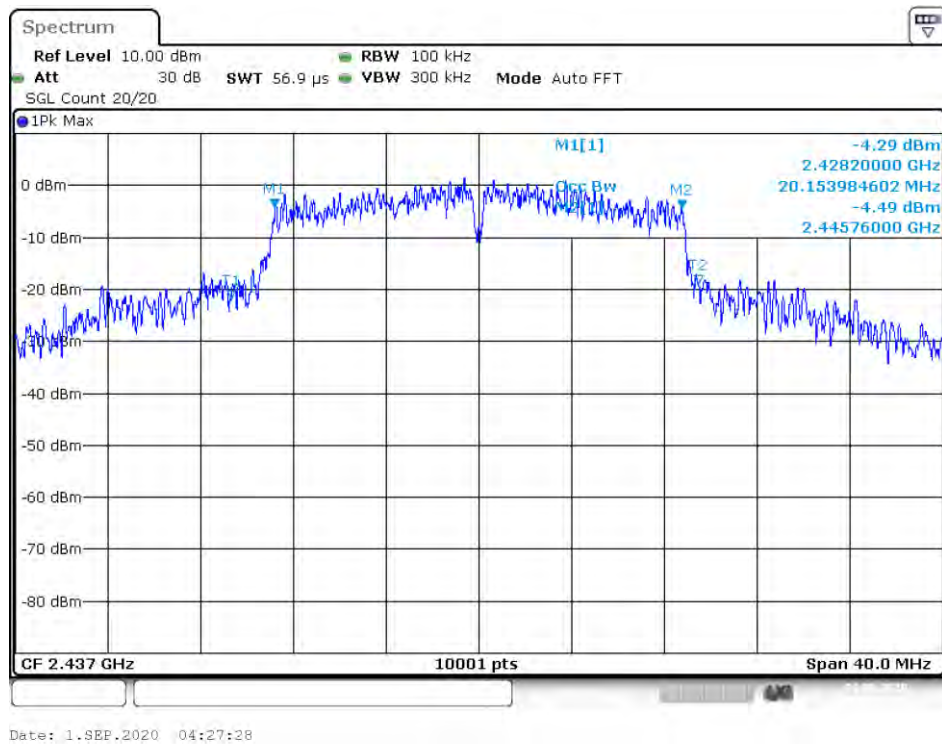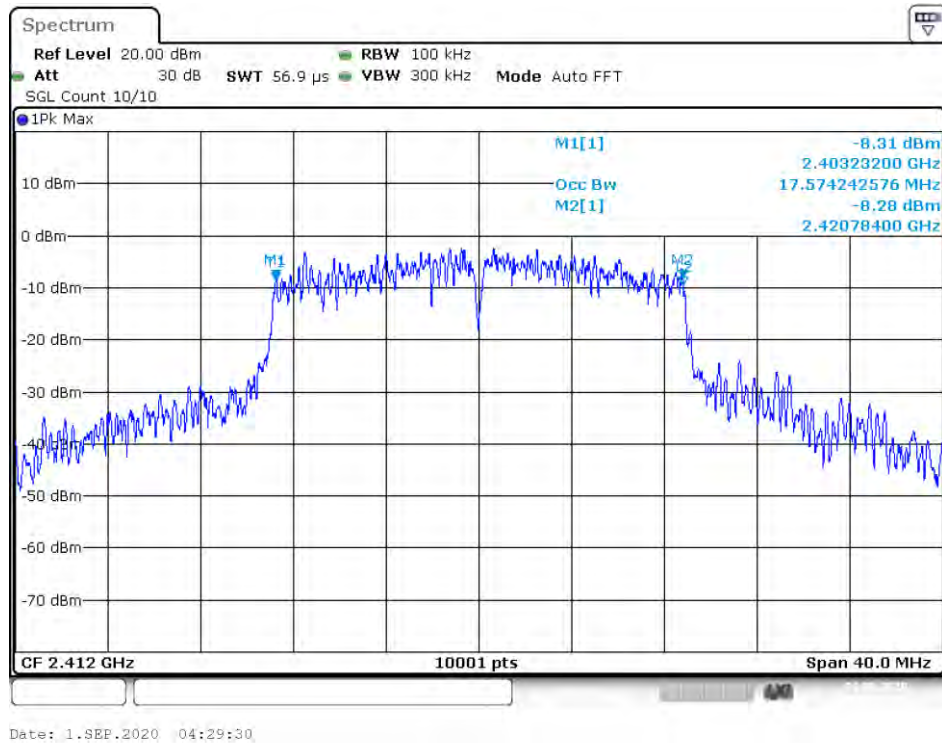



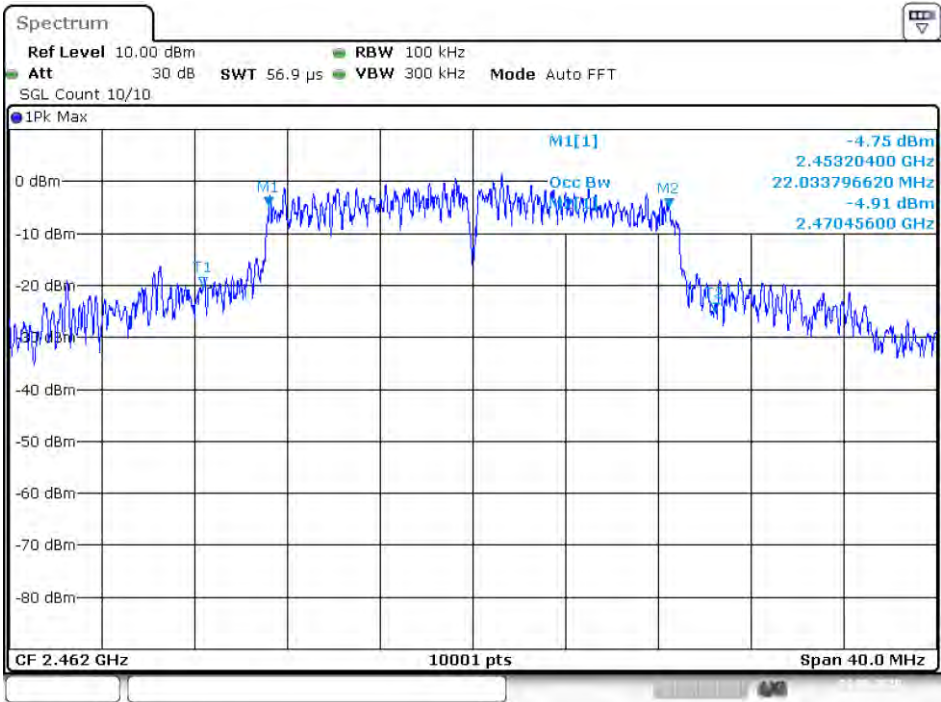



Date: 1.SEP.2020 04:26:42

IEEE 802.11n (HT40) MIMO				
Channel frequency (MHz)	Measurement level (MHz)		Required Limit (KHz)	Result
	Ant1	Ant2		
2422	31.776	31.648	>500	Pass
2437	33.056	30.752	>500	
2452	33.824	35.640	>500	


Ant1

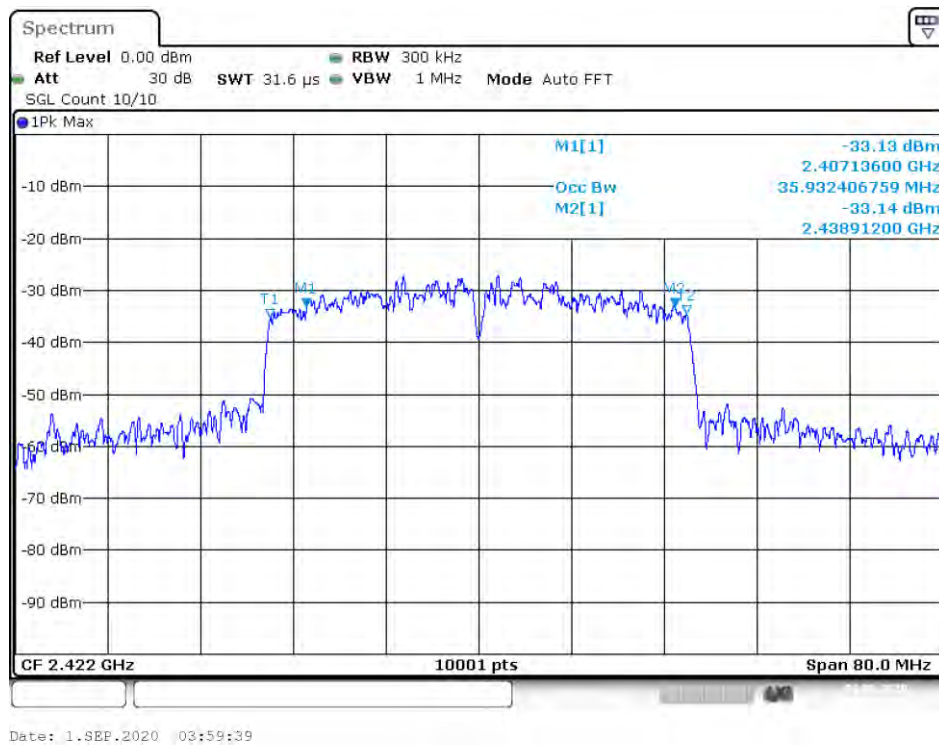

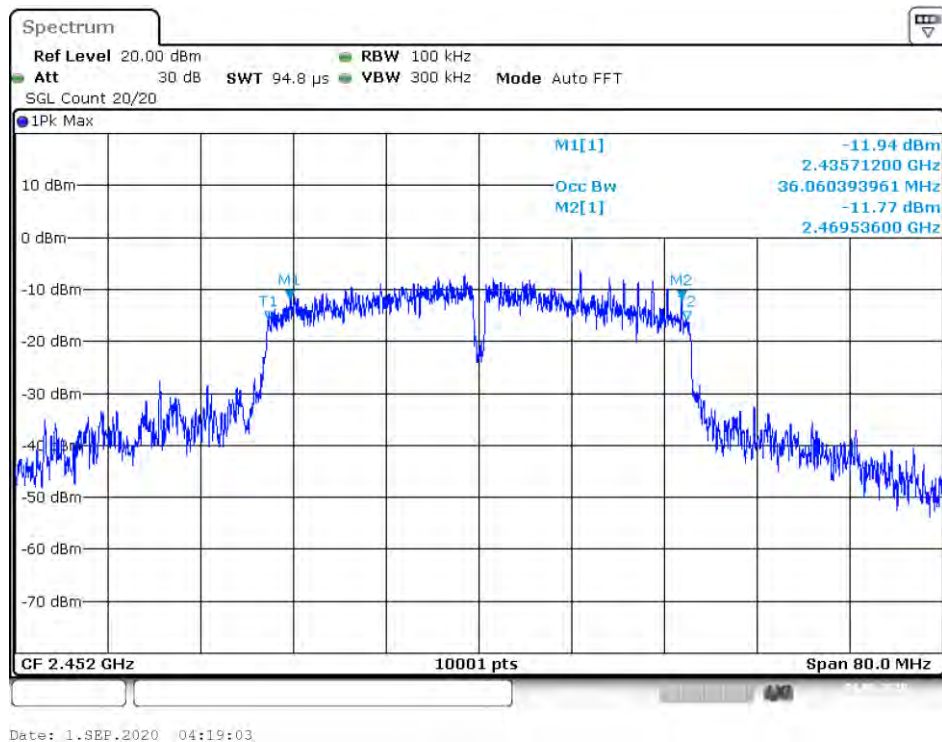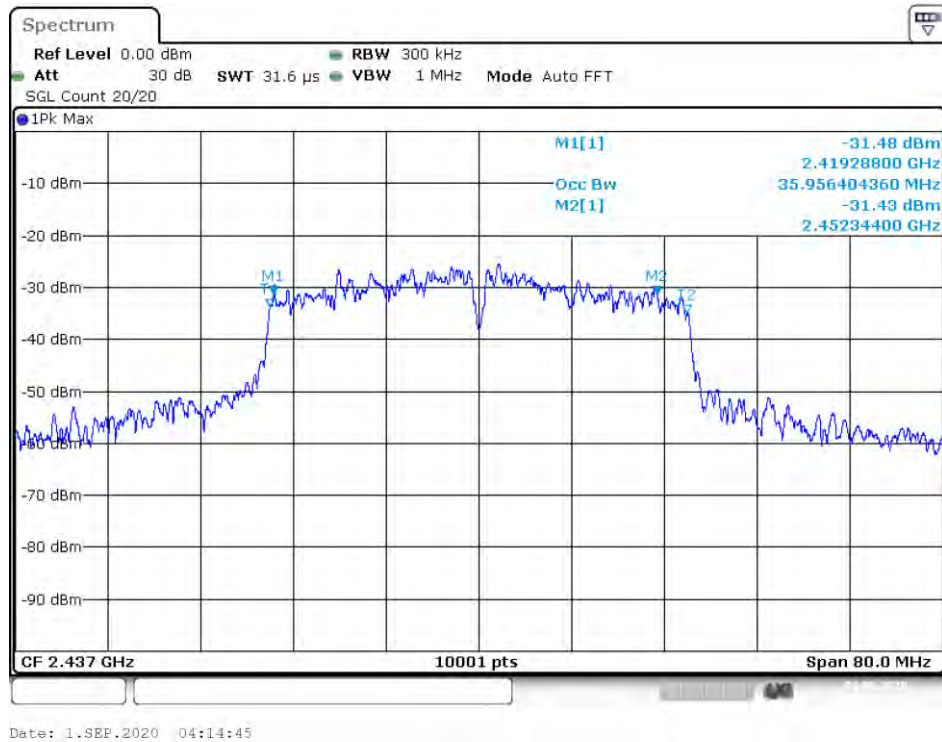


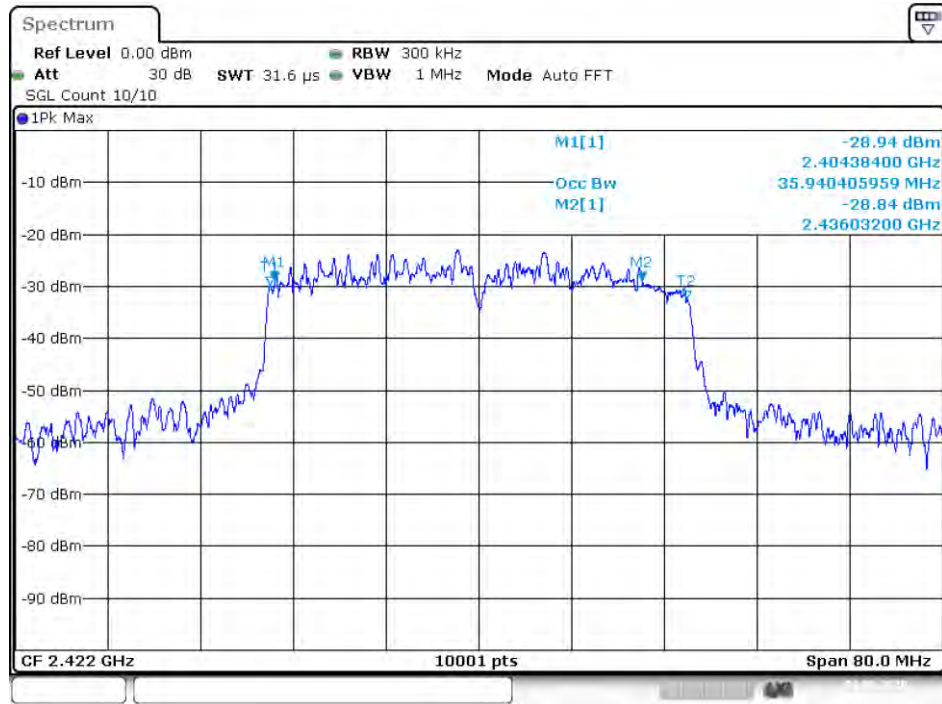

Date: 1.SEP.2020 03:59:42

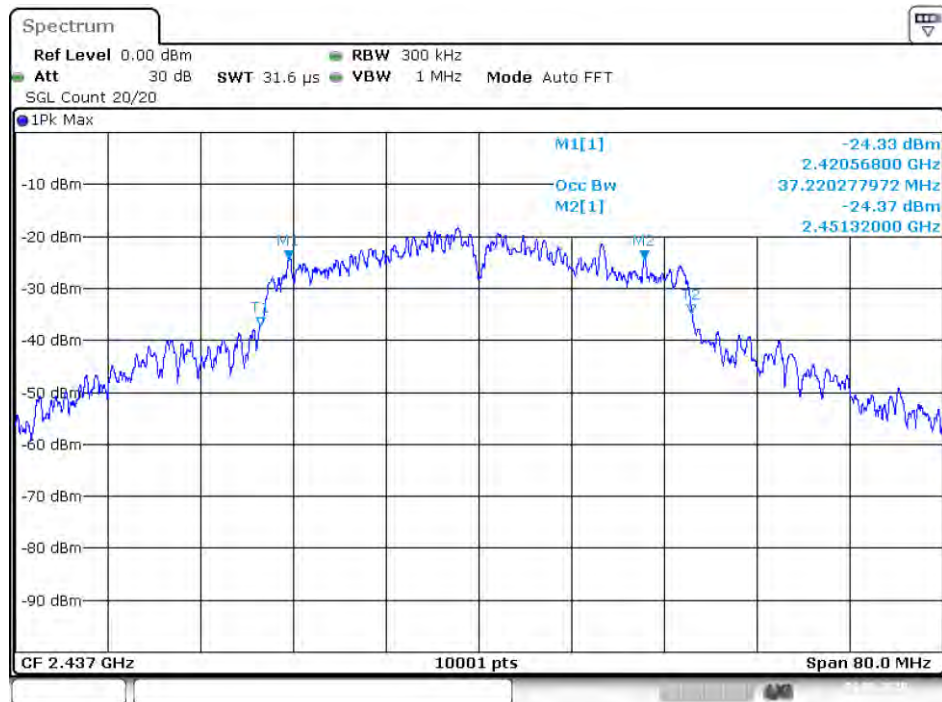

Date: 1.SEP.2020 04:14:49

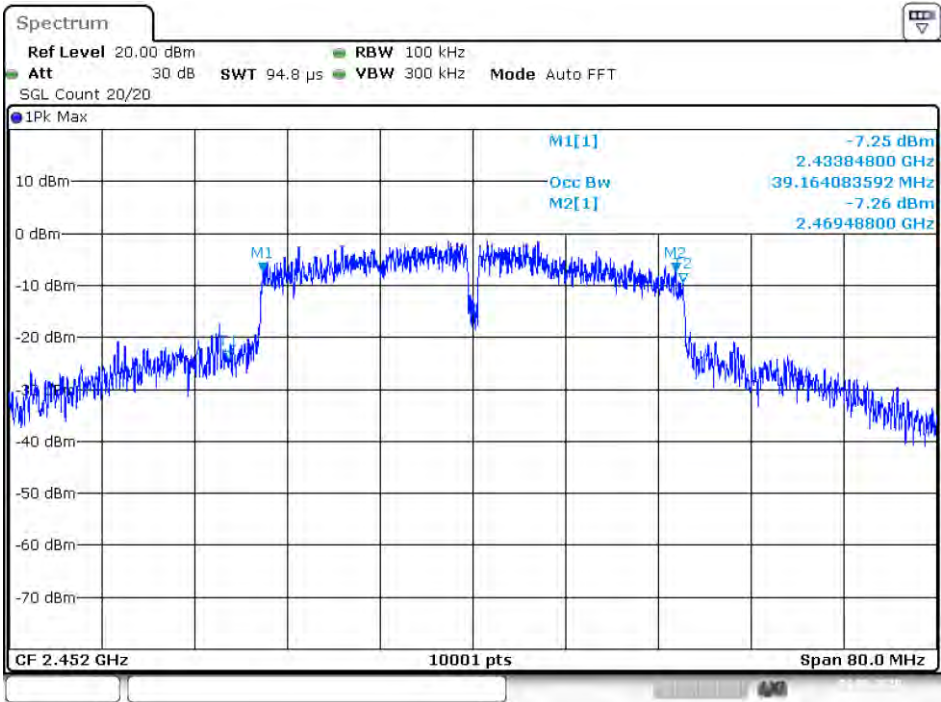

Date: 1.SEP.2020 04:19:06

11. Maximum Peak Output Power Test

11.1 Measurement Procedure

(1) According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

(2) According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit = $30 - (\text{Gain} - 6)$

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used

EQUIPMENT TYPE	Manufacturer	Model No.	Serial Number	Calibrated until.
USB RF Power sensor	RadiPower	RPR3006W	17I00015SNO88	2020-11-28
RF Test Software	MAIWEI	MTS 8310	N/A	N/A

11.4 Peak Power output limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

11.5 Measurement Results

Spectrum Detector:	PK	Test Date :	September 01, 2020
Test By:	Andy	Temperature :	28°C
Test Result:	PASS	Humidity :	60%

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Sum		
802.11b	1	2412	20.89	20.46	--	30	PASS
	6	2437	18.79	18.20	--	30	PASS
	11	2462	18.84	18.52	--	30	PASS
802.11g	1	2412	17.61	17.24	--	30	PASS
	6	2437	16.81	18.96	--	30	PASS
	11	2462	16.83	19.07	--	30	PASS
802.11n (HT20)	1	2412	16.59	15.96	19.297	28	PASS
	6	2437	17.07	19.11	21.219	28	PASS
	11	2462	16.76	18.34	20.632	28	PASS
802.11n (HT40)	3	2422	17.22	16.92	20.083	28	PASS
	6	2437	17.32	20.07	21.919	28	PASS
	9	2452	17.22	20.13	21.925	28	PASS

Note:

1. For MIMO System of 802.11n(HT20) and 802.11n(HT40), total power is calculated by combining the output power of each antenna according to KDB662911.
2. Antenna 1 Gain: 5dBi, Antenna 2 Gain: 5dBi. For antennas with gains of 6dBi or less, maximum allowed Transmitter output watt(+30dBm)
3. In MIMO, $\text{Ant1} + \text{Ant2 Directional Gain} = G_{\text{ANT}} + 10\log(N)\text{dBi} = 5 + 10\log(2) = 8\text{dBi}$.

12. Band Edge Test

12.1 Measurement Procedure

For Conducted Test

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Radiated emission Test

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Repeat above procedures until all frequency measured were complete.


When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	10Hz
Detector	Peak
Trace	Max hold

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

12.4 Measurement Results

1. Conducted Test

Please refer to the following pages.



Test Mode: IEEE 802.11b SISO Ant1


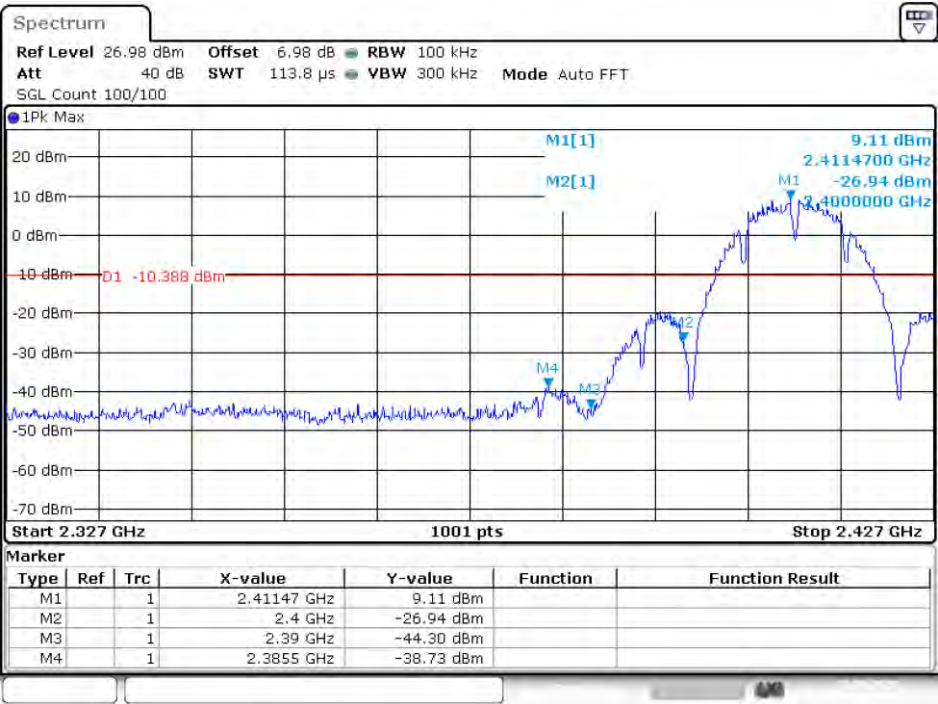


Date: 29.AUG.2020 05:10:33





Date: 29.AUG.2020 05:41:06

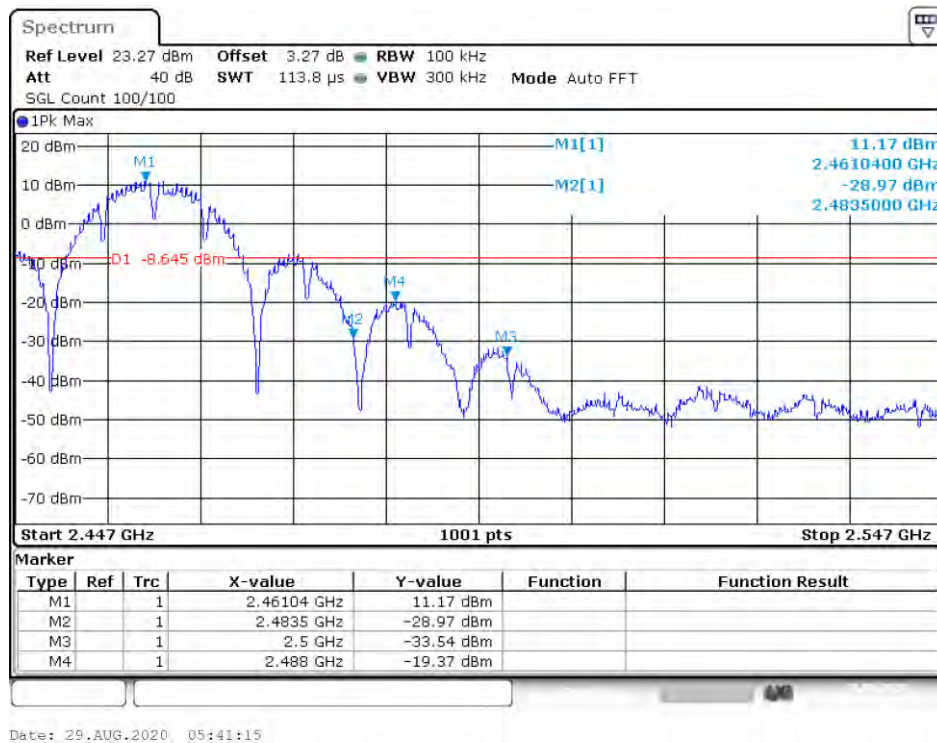
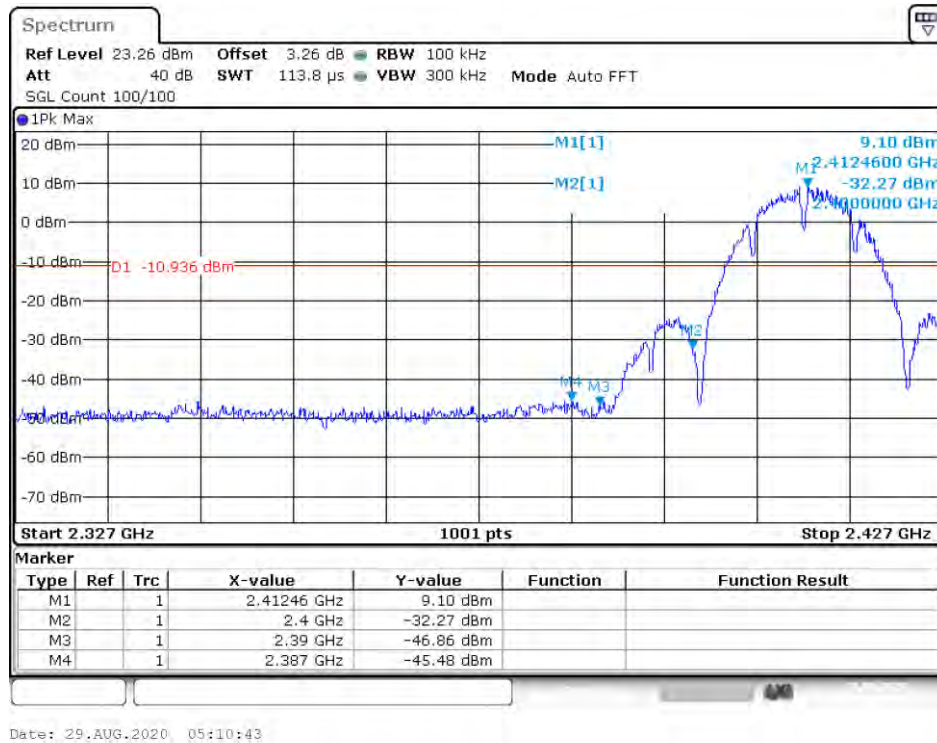


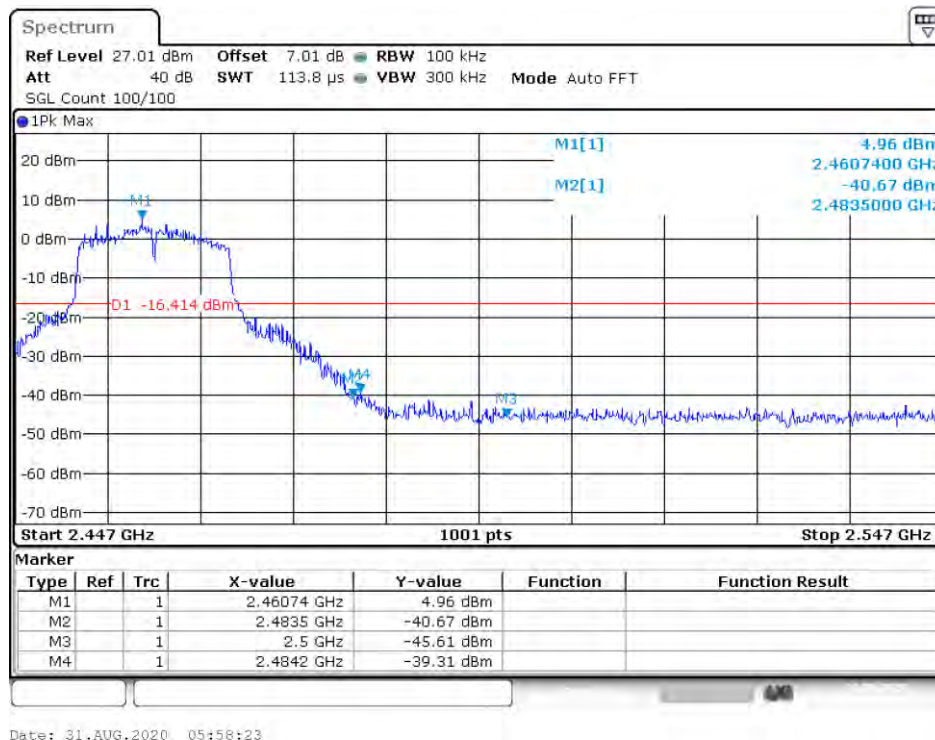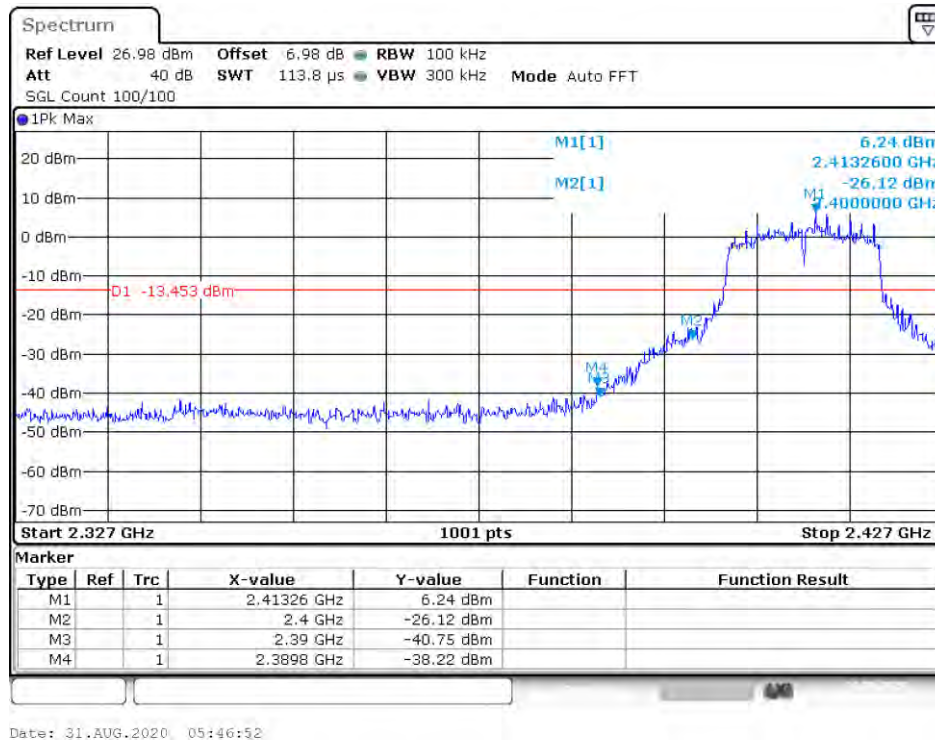



Test Mode: IEEE 802.11g SISO Ant2

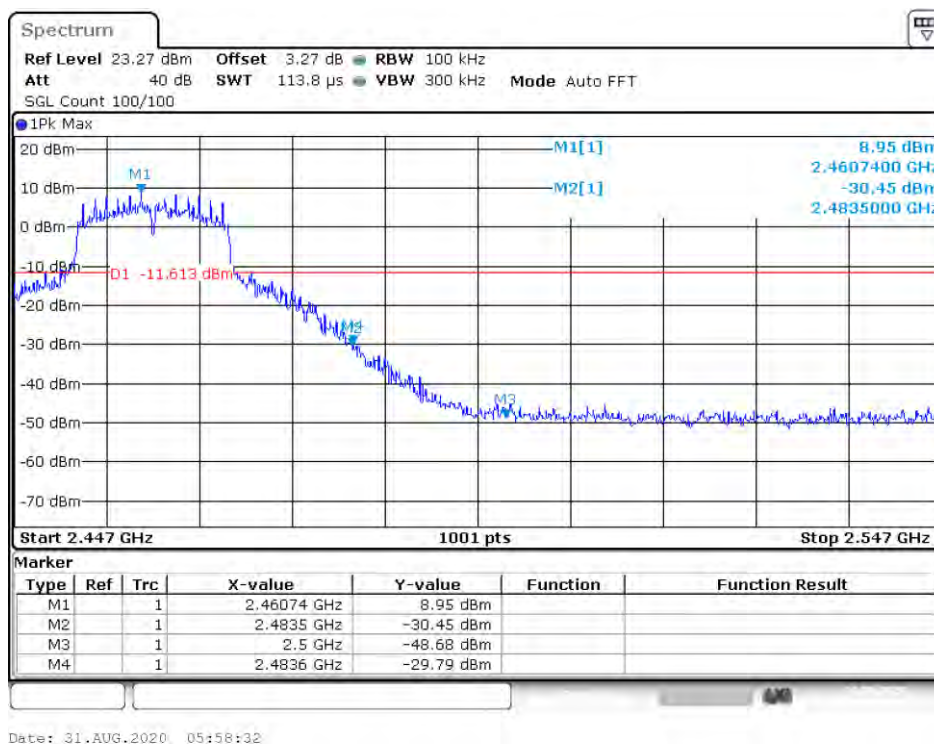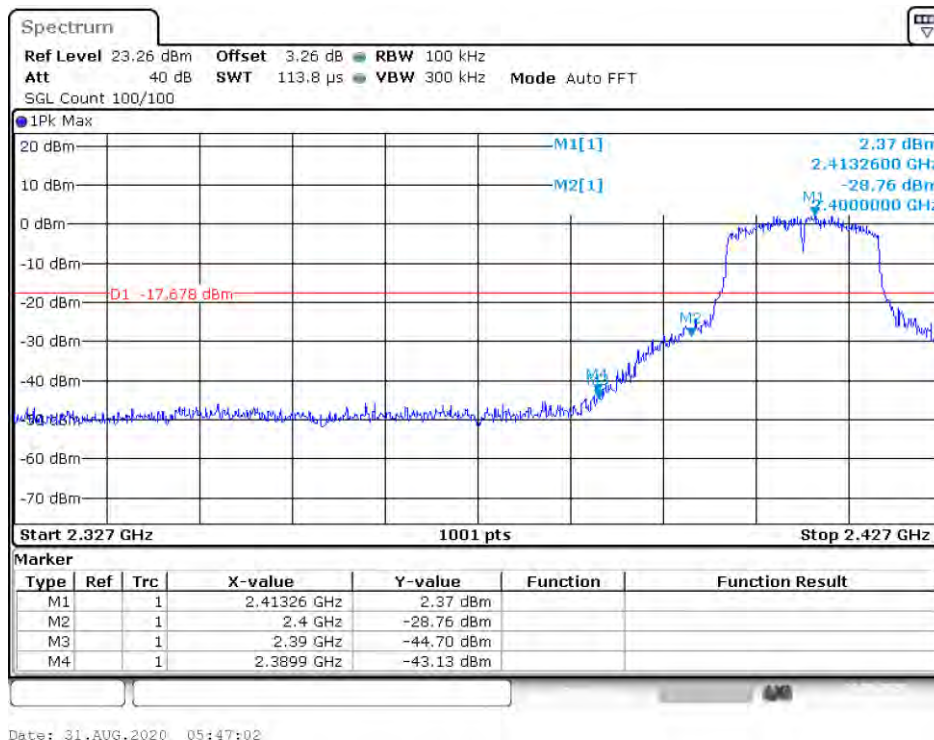

Test Mode: IEEE 802.11n(HT20) MIMO

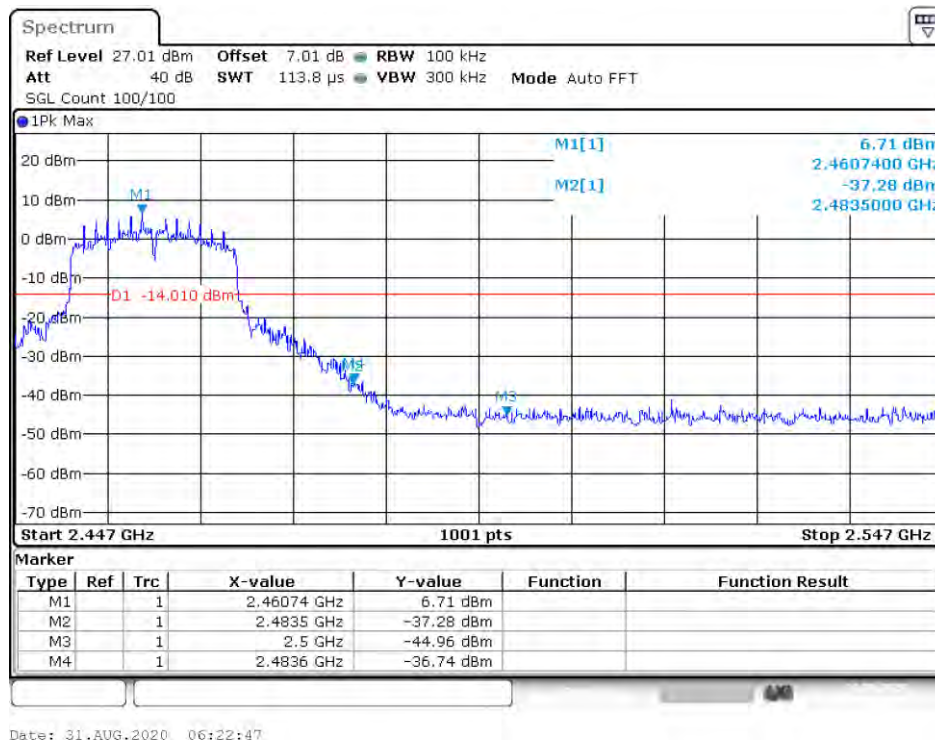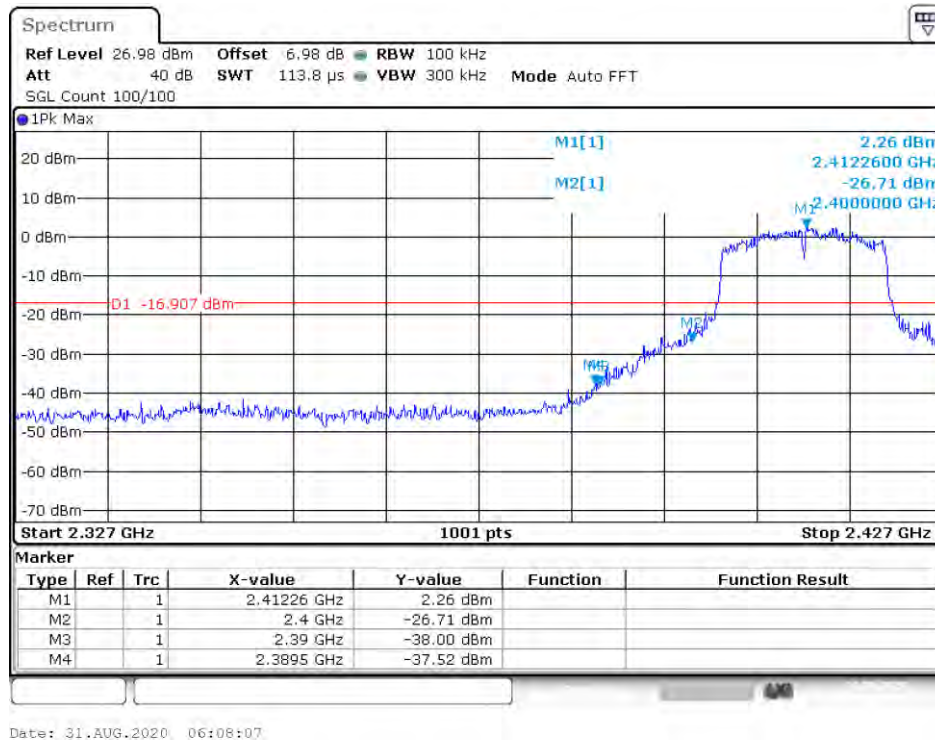

Test Mode: IEEE 802.11n(HT40) MIMO

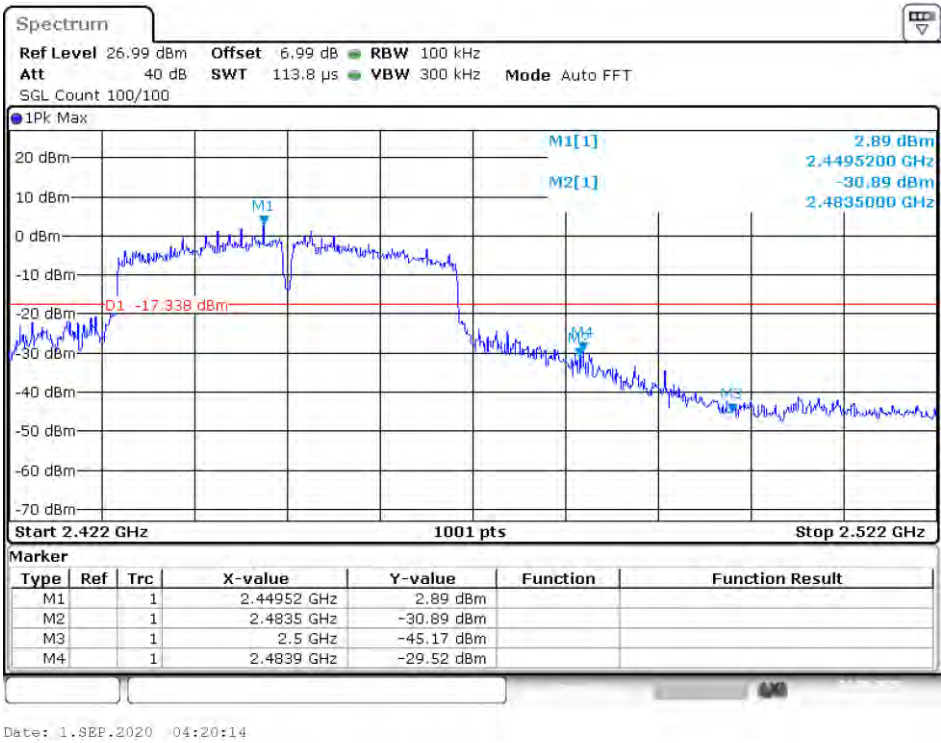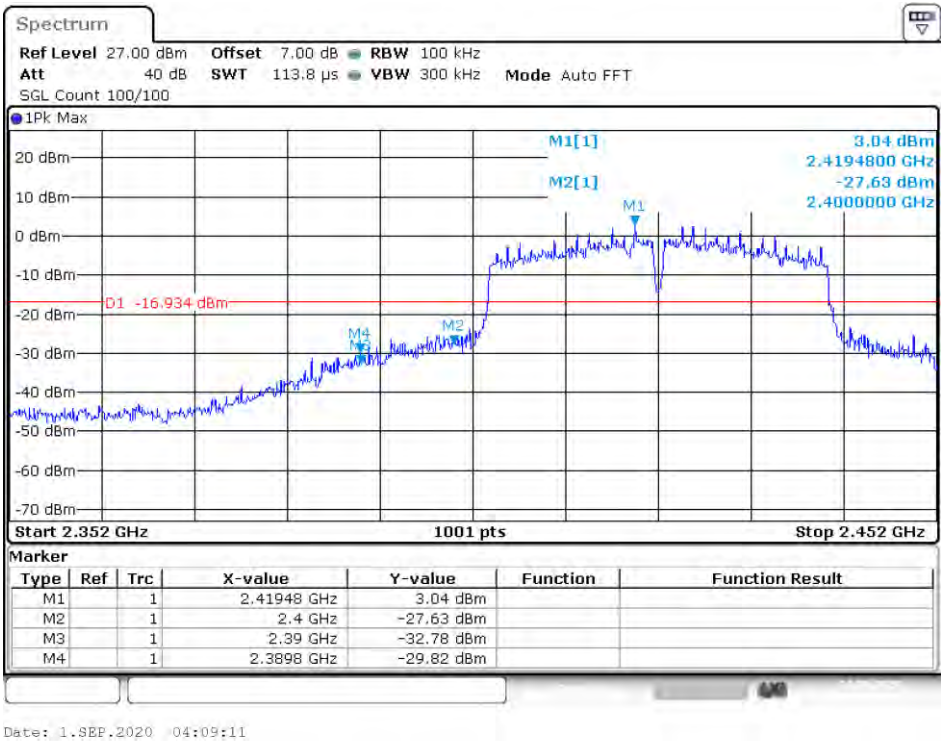

2. Radiated emission Test



Report No.: EA2008257F08001

54 of 83

Spectrum Detector:

PK/AV

Test Date :

2020-08-25

Test By:

Andy

Temperature :

28 °C

Humidity :

65 %

IEEE 802.11b SISO Ant1										
Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
<2400	H	86.65	68.41	-26.3	60.35	42.11	74	54	-13.65	-11.89
<2400	V	85.65	65.59	-26.1	59.55	39.49	74	54	-14.45	-14.51
>2483.5	H	88.09	67.52	-26.3	61.79	41.22	74	54	-12.21	-12.78
>2483.5	V	86.46	65.18	-26.1	60.36	39.08	74	54	-13.64	-14.92

IEEE 802.11b SISO Ant2										
Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
<2400	H	89.84	69.84	-26.3	63.54	43.54	74	54	-10.46	-10.46
<2400	V	88.21	68.29	-26.1	62.11	42.19	74	54	-11.89	-11.81
>2483.5	H	88.35	68.99	-26.3	62.05	42.69	74	54	-11.95	-11.31
>2483.5	V	86.79	65.99	-26.1	60.69	39.89	74	54	-13.31	-14.11

IEEE 802.11g SISO Ant1										
Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
<2400	H	90.45	70.55	-26.3	64.15	44.25	74	54	-9.85	-9.75
<2400	V	86.79	66.79	-26.1	60.69	40.69	74	54	-13.31	-13.31
>2483.5	H	87.89	67.78	-26.3	61.59	41.48	74	54	-12.41	-12.52
>2483.5	V	86.43	68.89	-26.1	60.33	42.79	74	54	-13.67	-11.21

IEEE 802.11g SISO Ant2										
Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
<2400	H	90.88	68.79	-26.3	64.58	42.49	74	54	-9.42	-11.51
<2400	V	88.21	65.97	-26.1	62.11	39.87	74	54	-11.89	-14.13
>2483.5	H	86.89	67.88	-26.3	60.59	41.58	74	54	-13.41	-12.42
>2483.5	V	85.97	66.74	-26.1	59.87	40.64	74	54	-14.13	-13.36



IEEE 802.11n (HT20) M M O

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	89.27	70.32	-26.3	62.97	44.02	74	54	-11.03	-9.98
<2400	V	86.21	68.25	-26.1	60.11	42.15	74	54	-13.89	-11.85
>2483.5	H	88.76	68.64	-26.3	62.46	42.34	74	54	-11.54	-11.66
>2483.5	V	87.46	67.74	-26.1	61.36	41.64	74	54	-12.64	-12.36

IEEE 802.11n (HT40) M M O

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	89.99	69.84	-26.3	63.69	43.54	74	54	-10.31	-10.46
<2400	V	86.26	68.21	-26.1	60.16	42.11	74	54	-13.84	-11.89
>2483.5	H	87.25	66.99	-26.3	60.95	40.69	74	54	-13.05	-13.31
>2483.5	V	85.98	66.35	-26.1	59.88	40.25	74	54	-14.12	-13.75

13. Maximum Power Spectral Density

13.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

13.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RBW	3KHz
VBW	10KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

13.3 Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set analyzer center frequency to DTS channel center frequency.
- Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- Set the RBW=3KHz. Set the VBW=10KHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

13.4 Block Diagram of Test Setup




13.5 Limit


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

13.6 Test Result


Spectrum Detector:	PK	Test Date :	September 01, 2020
Test By:	Andy	Temperature :	28°C
Humidity :	60%		

IEEE 802.11b SISO Ant1			
Channel frequency (MHz)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
2412	-12.12	8	Pass
2437	-9.11		
2462	-9.03		

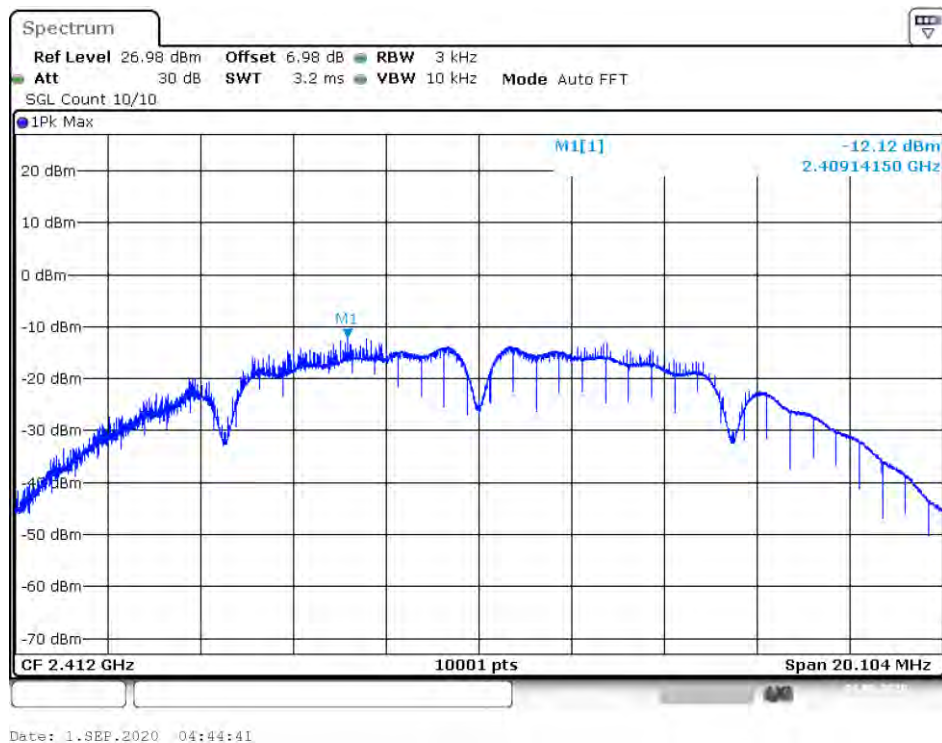

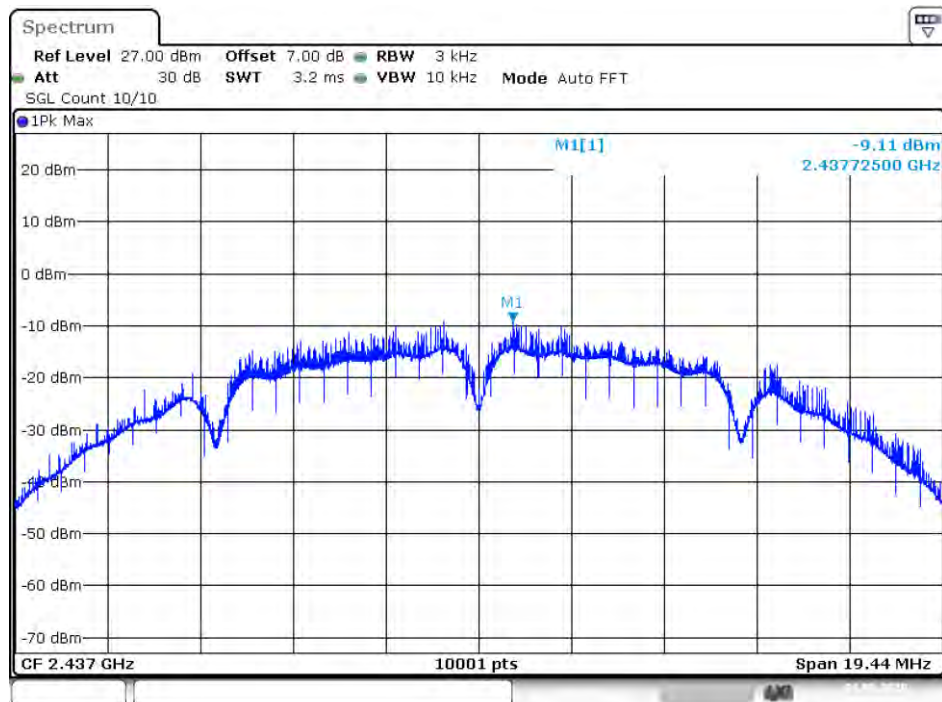




Date: 1.SEP.2020 04:42:47

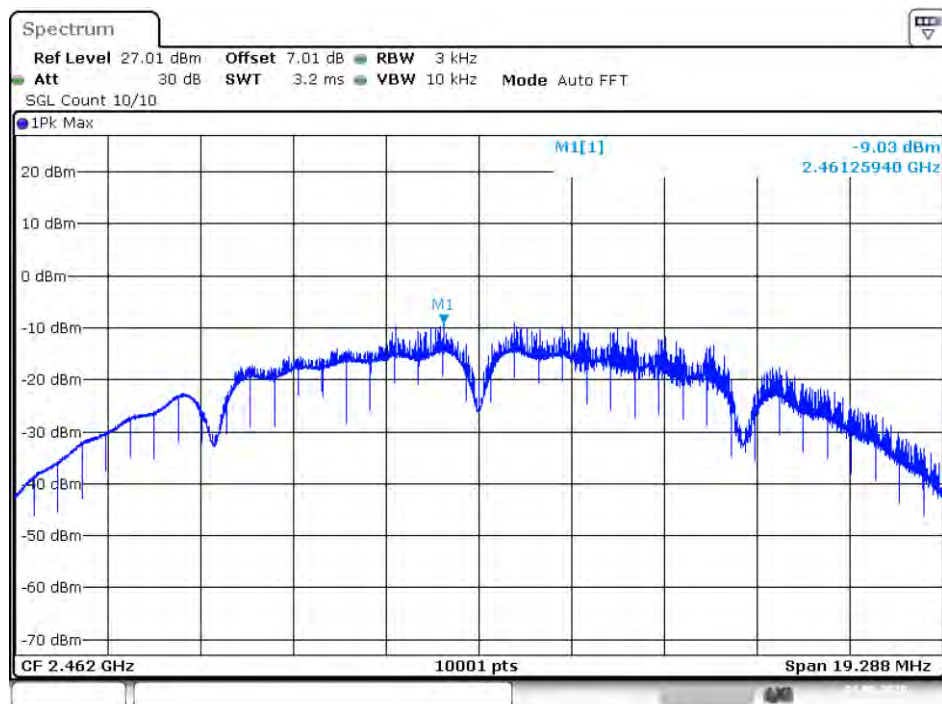


Date: 1.SEP.2020 04:41:11



IEEE 802.11b SISO Ant2			
Channel frequency (MHz)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
2412	-9.72	8	Pass
2437	-7.09		
2462	-6.81		

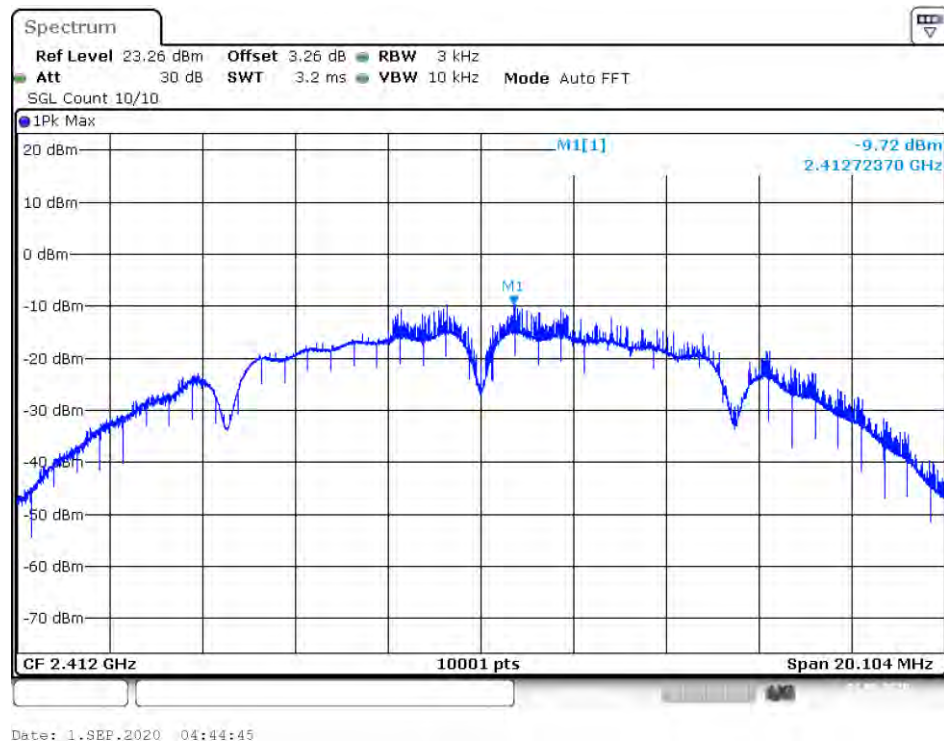

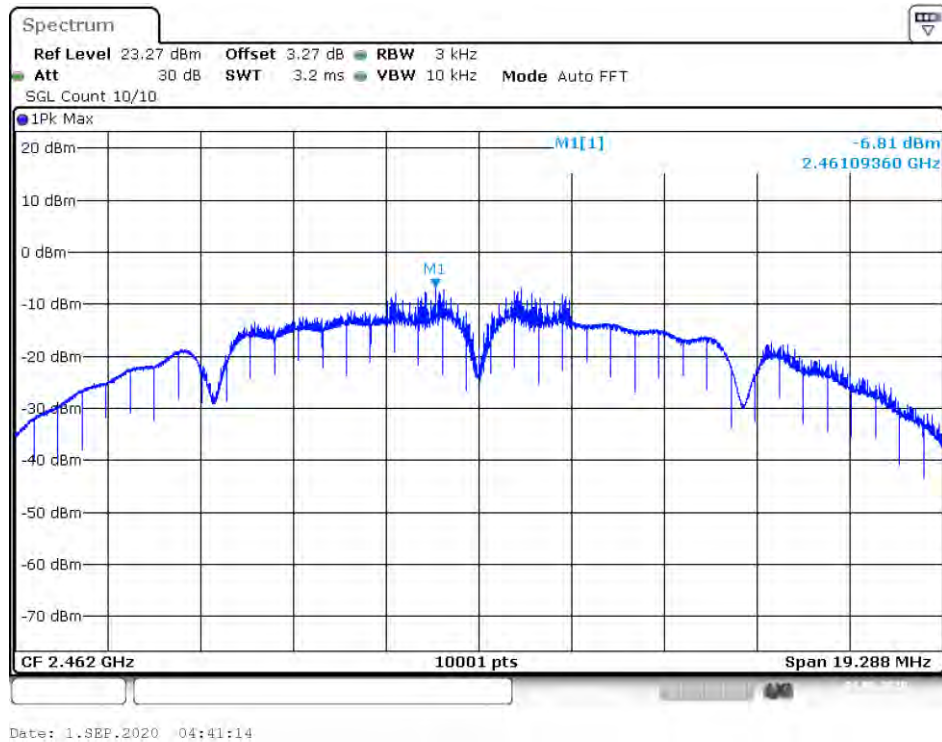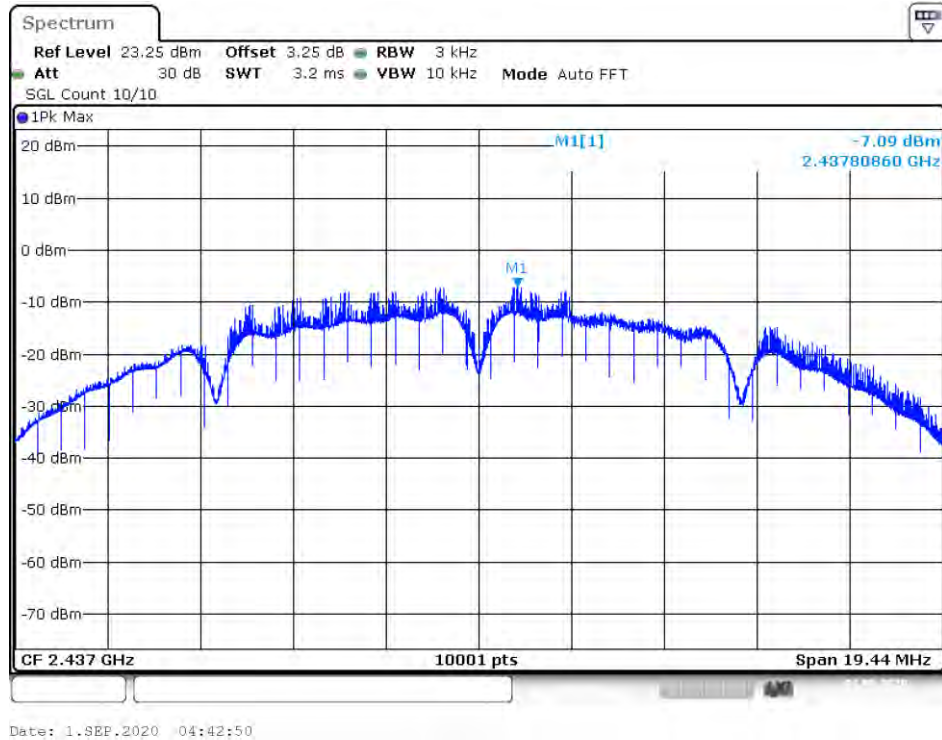

IEEE 802.11g(SISO) Ant 1			
Channel frequency (MHz)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
2412	-10.72	8	Pass
2437	-11.16		
2462	-12.18		

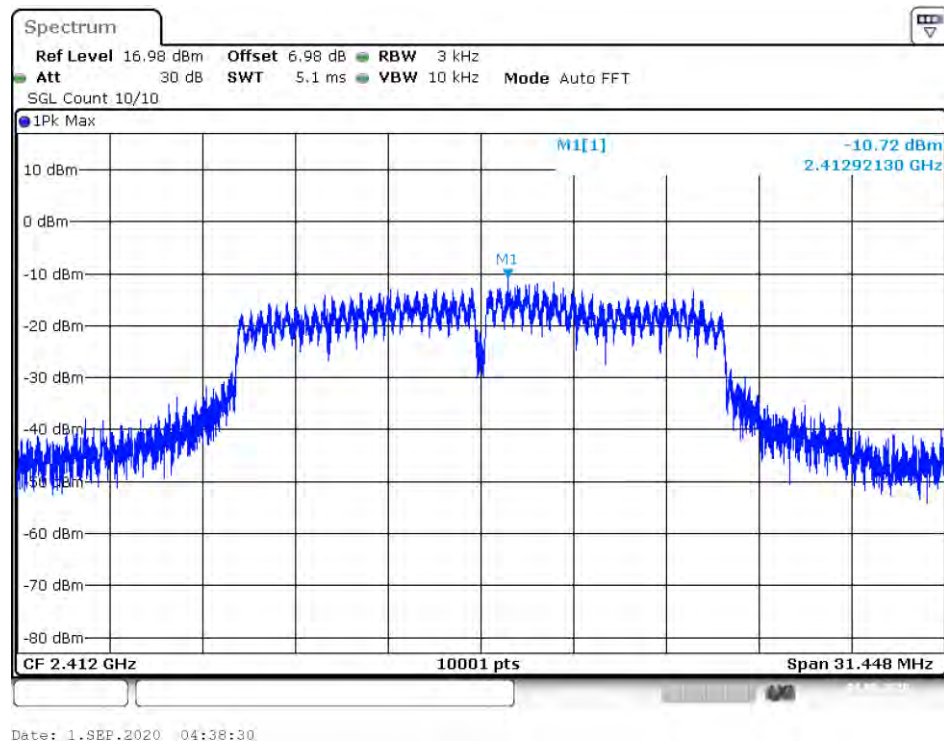


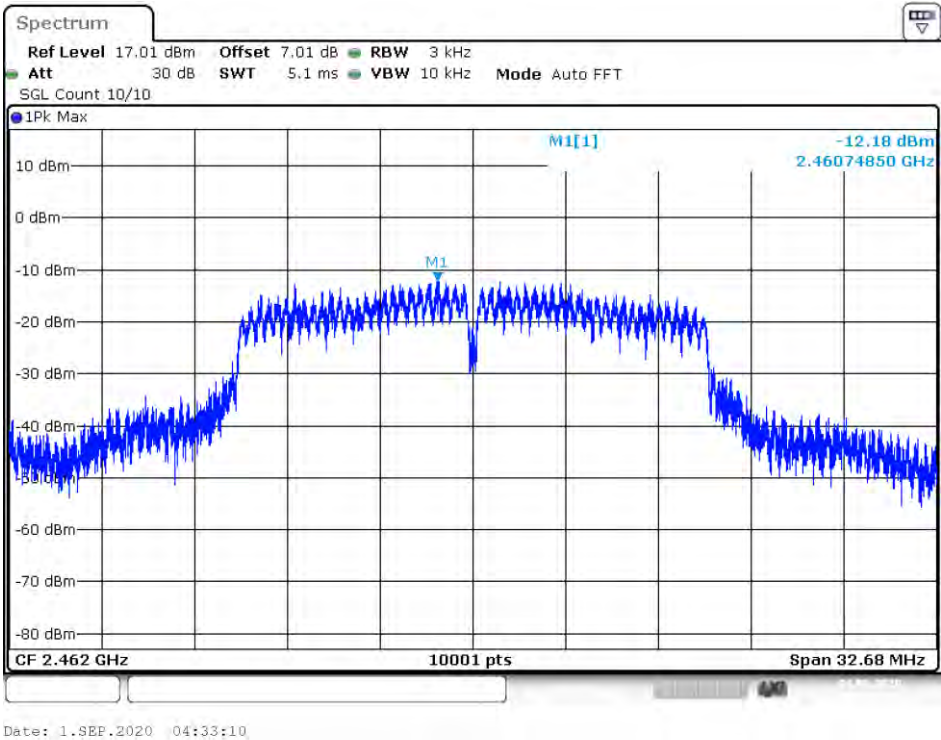
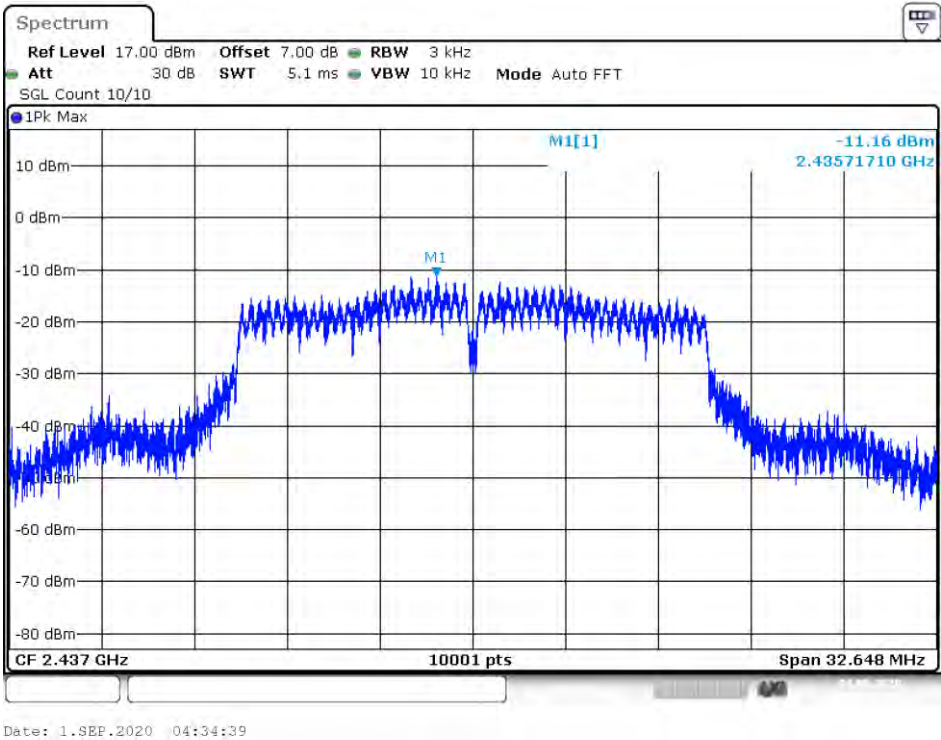


Report No.: EA2008257F08001

63 of 83


IEEE 802.11g(SISO) Ant2			
Channel frequency (MHz)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
2412	-11.84	8	Pass
2437	-9.01		
2462	-9.77		

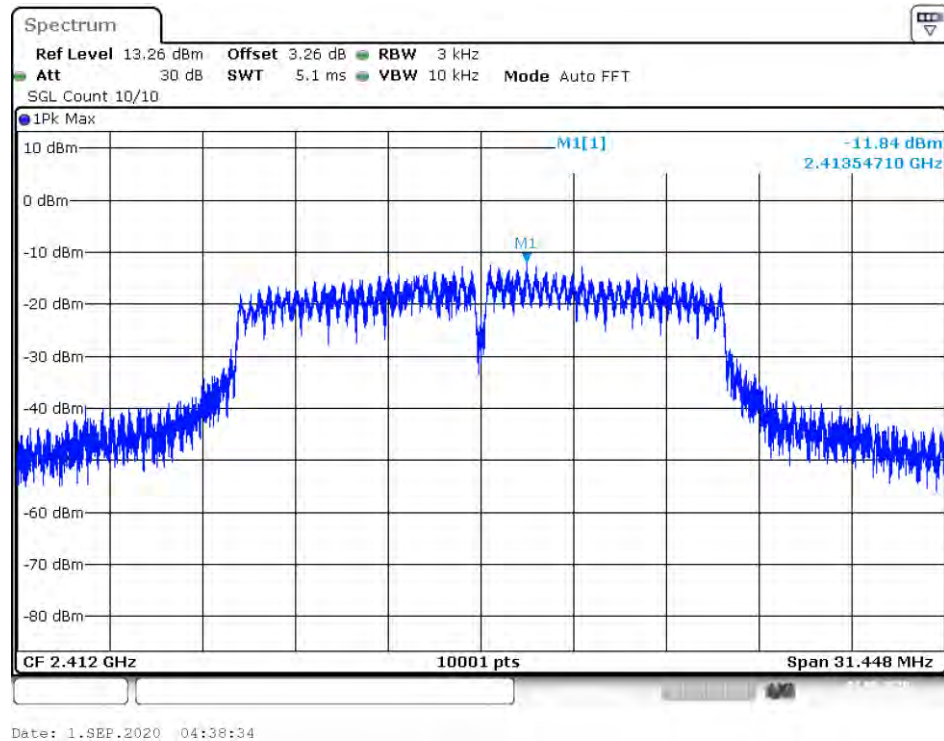


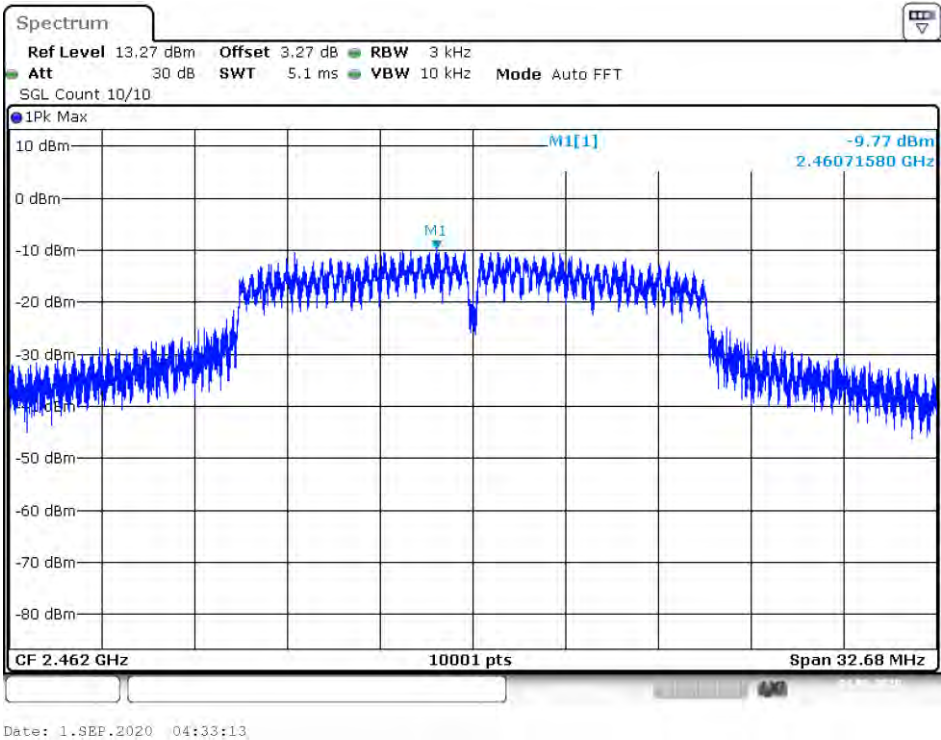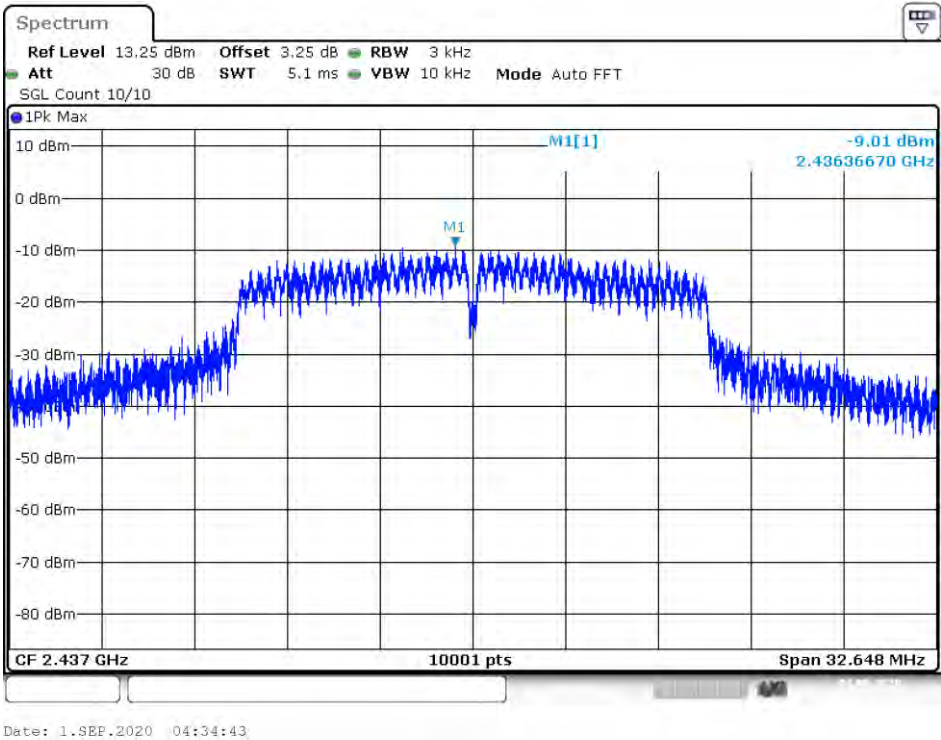


IEEE 802.11n(HT20) MIMO(Antenna Gain=8dBi)					
Channel frequency (MHz)	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
	Ant1	Ant2	Total		
2412	-11.97	-12.75	-9.33	6	Pass
2437	-11.80	-8.85	-7.07		
2462	-10.71	-7.70	-5.94		
Remark: In MIMO, Ant1+Ant2 Directional Gain= $G_{ant}+10\text{Log}(N)\text{dBi}=5+10\text{Log}(2)=8\text{dBi}$. Directional Gain was according to KDB662911.					

Ant1

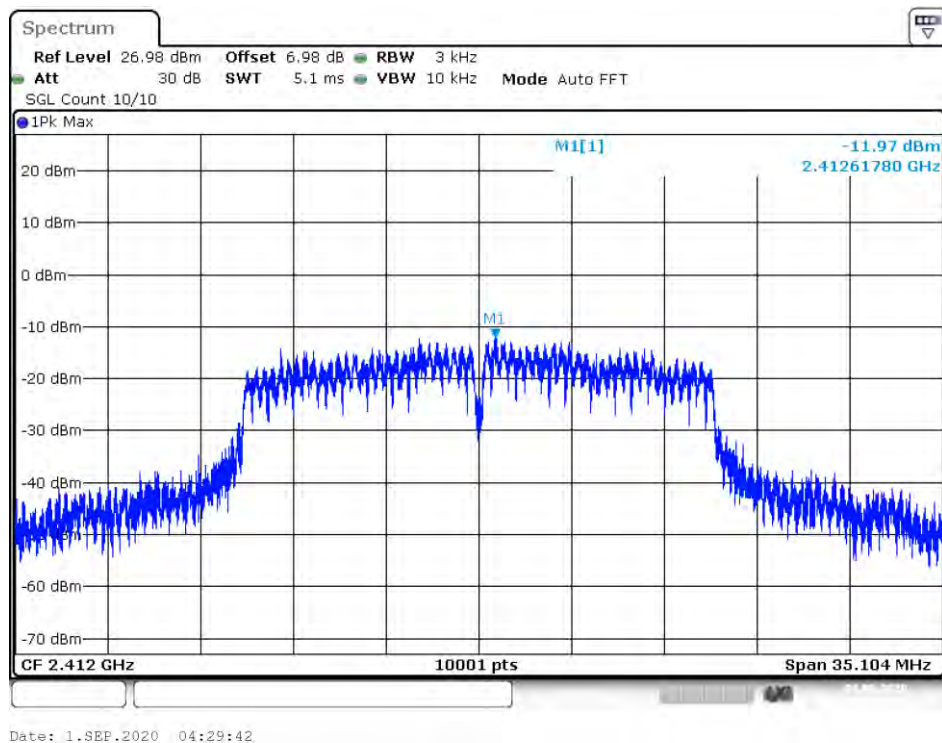


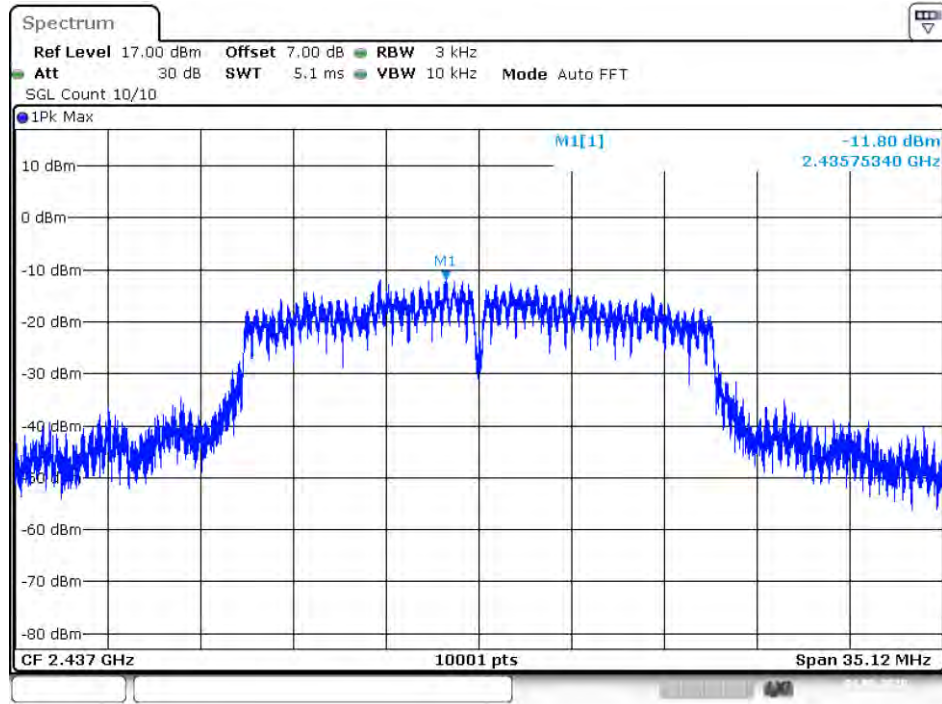


Date: 1.SEP.2020 04:27:39

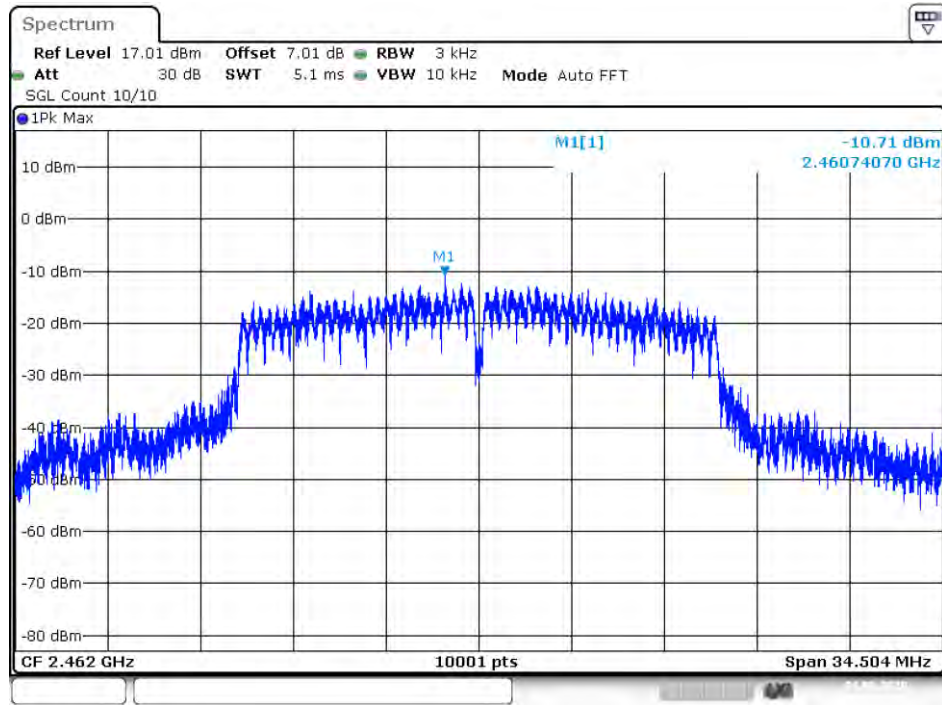


Date: 1.SEP.2020 04:26:53

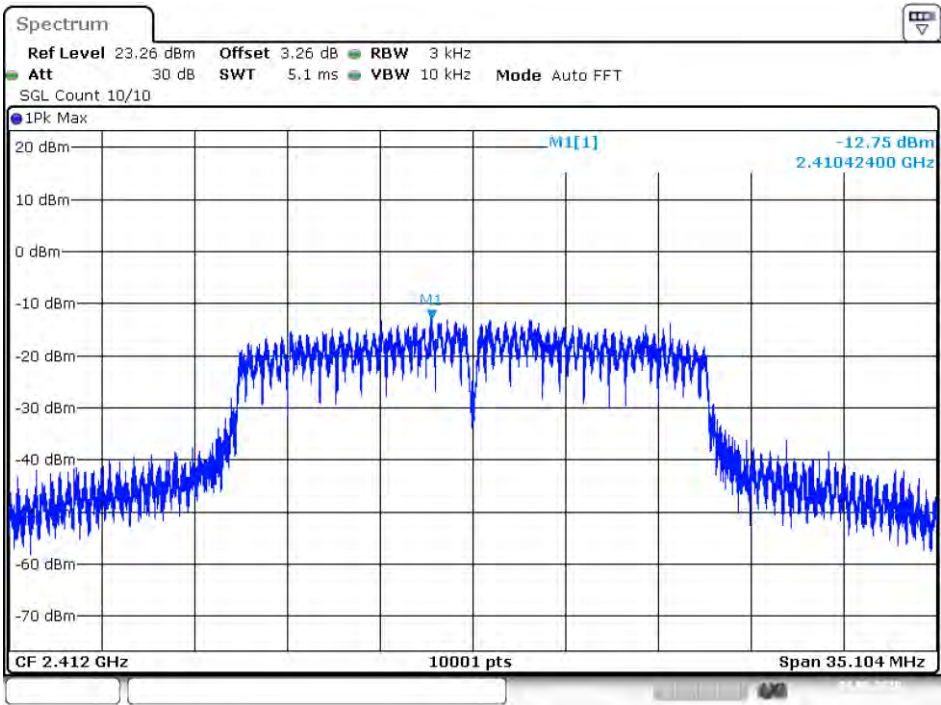

Date: 1.SEP.2020 04:29:45

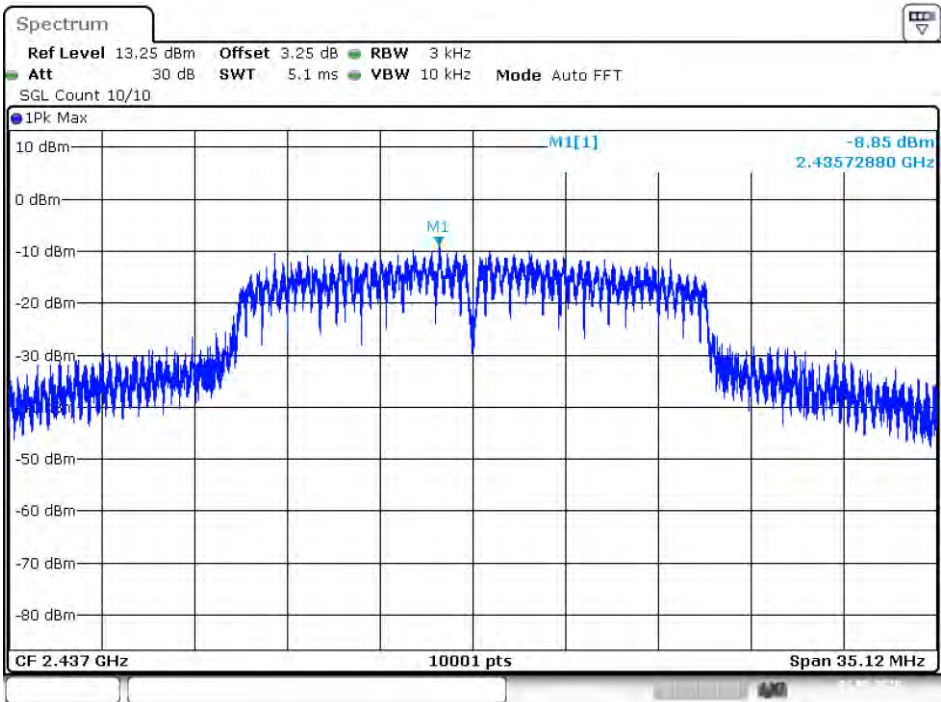


Date: 1.SEP.2020 04:27:42


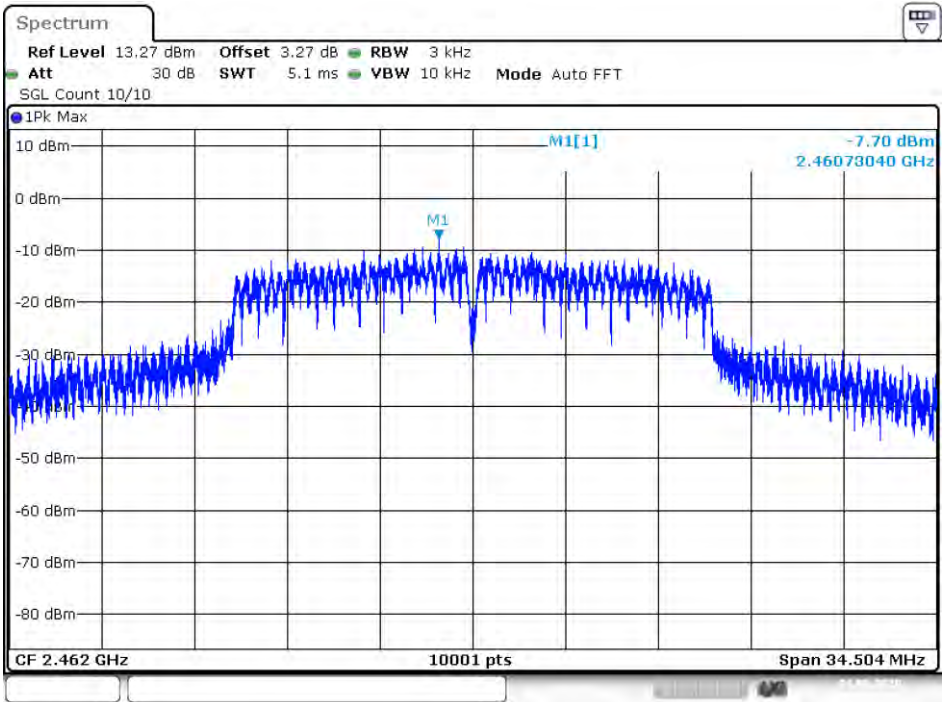



Date: 1.SEP.2020 04:26:57

IEEE 802.11n(HT40) MIMO(Antenna Gain=8dBi)					
Channel frequency (MHz)	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
	Ant 1	Ant 2	Total		
2422	-13.32	-13.95	-10.61	6	Pass
2437	-13.44	-9.99	-8.37		
2452	-13.08	-11.03	-8.93		
Remark: In MIMO, Ant1+Ant2 Directional Gain= $G_{ant}+10\text{Log}(N)\text{dBi}=5+10\text{Log}(2)=8\text{dBi}$. Directional Gain was according to KDB662911.					


Ant1

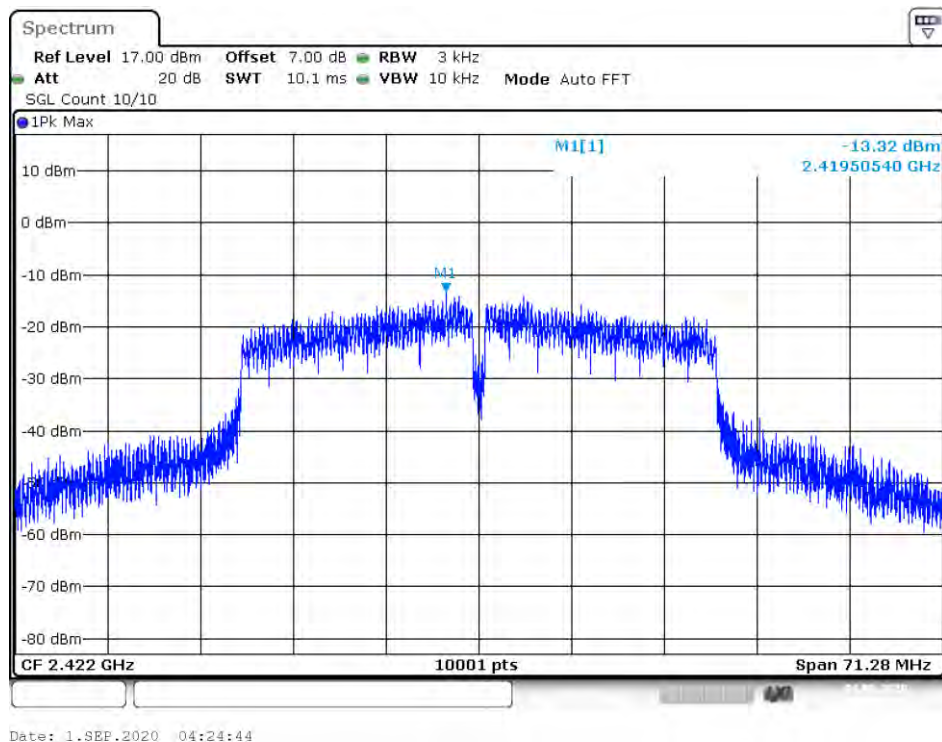

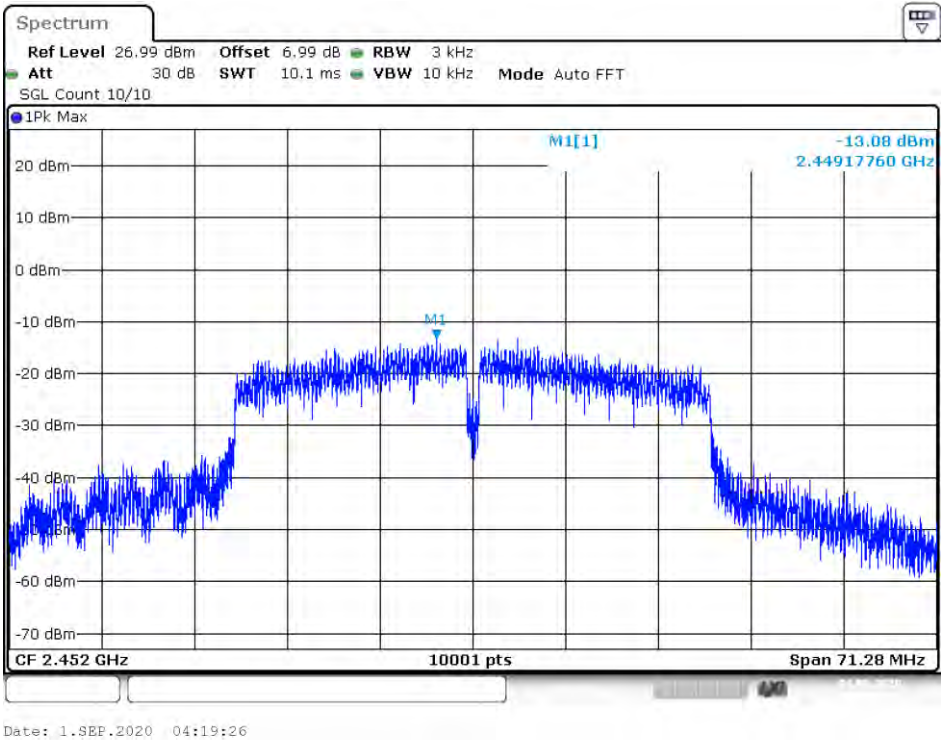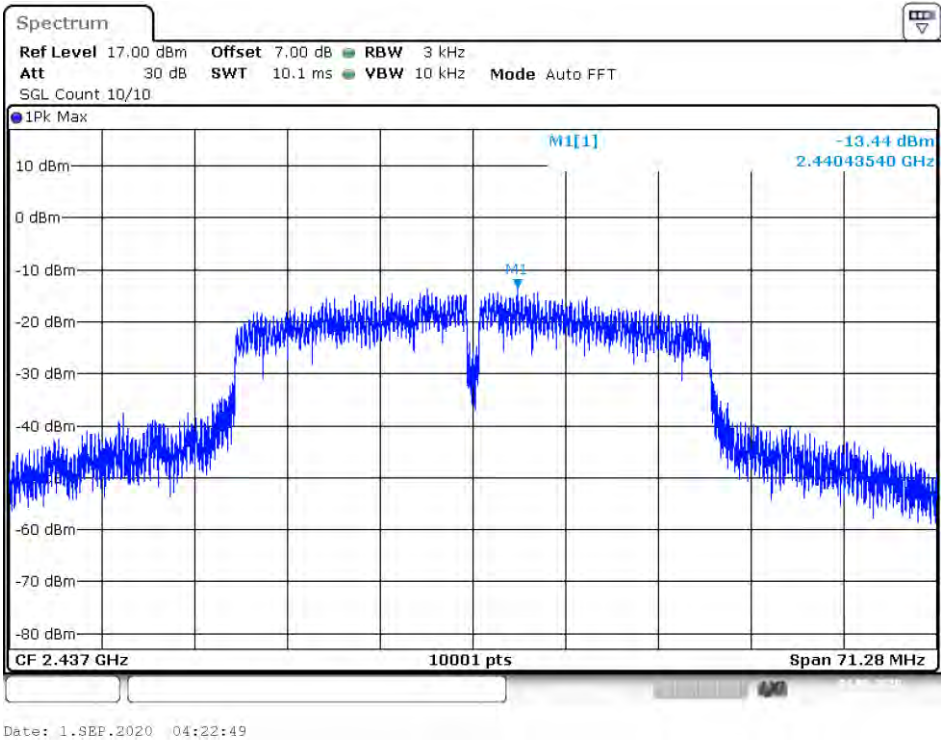


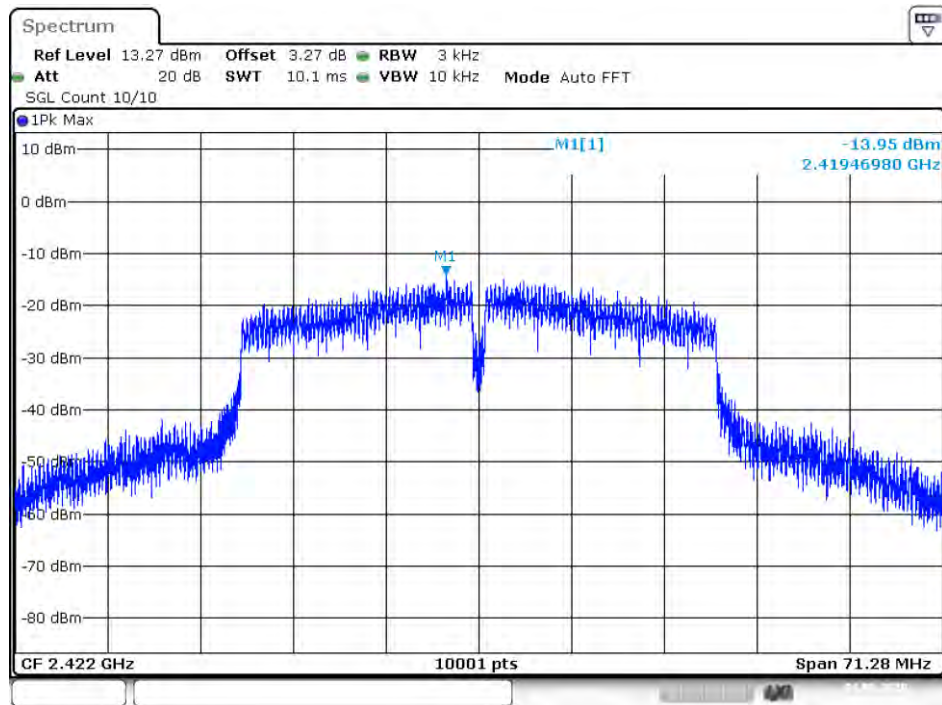

Date: 1.SEP.2020 04:24:48

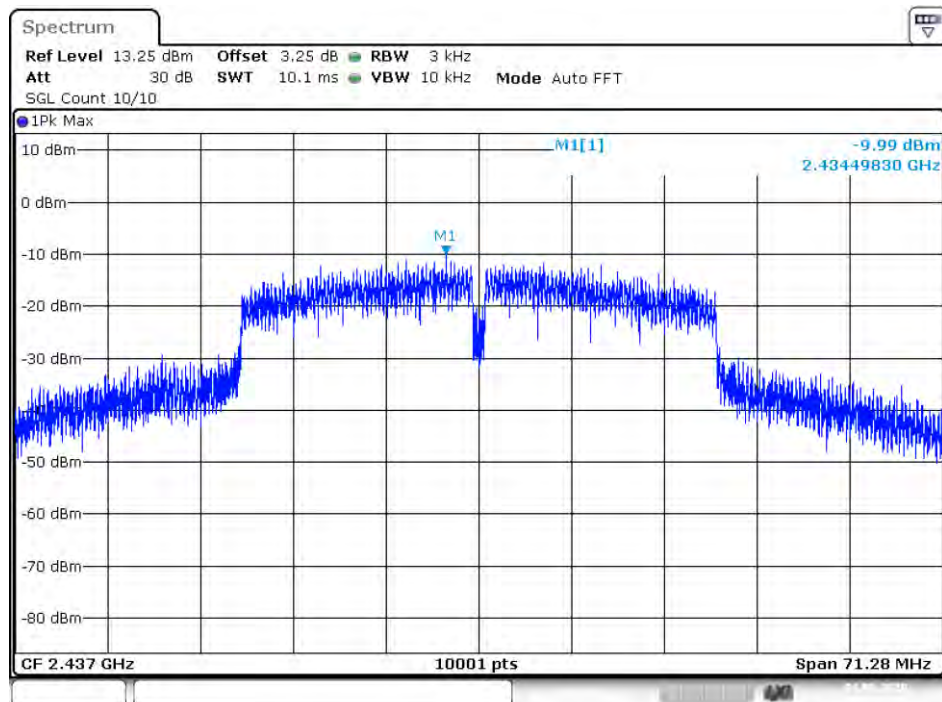

Date: 1.SEP.2020 04:22:53

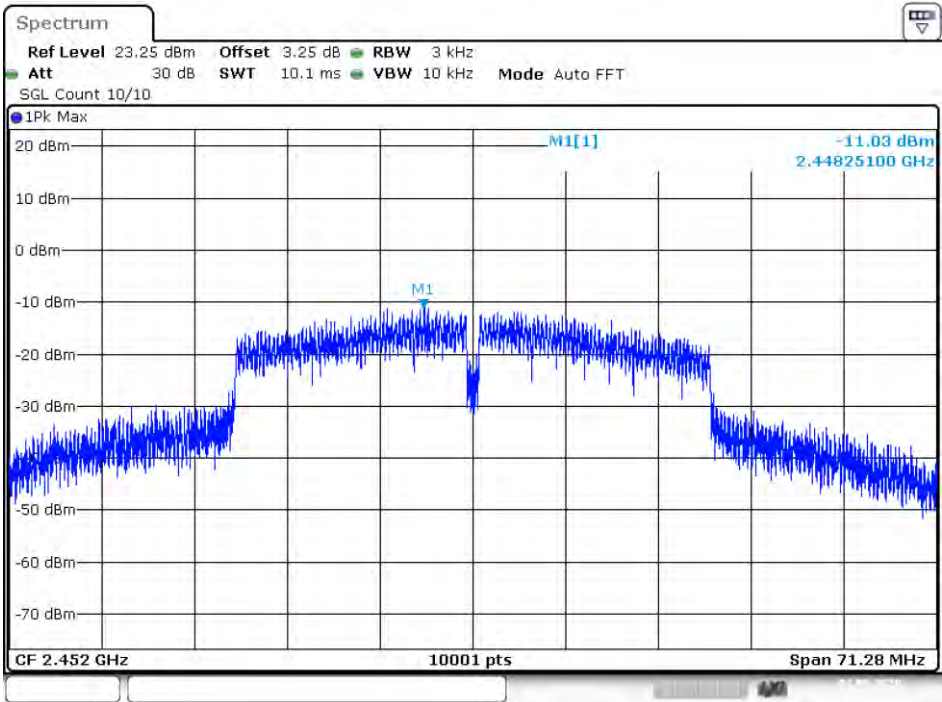

Date: 1.SEP.2020 04:19:30

14. Antenna Port Emission

14.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

14.2 Measuring Instruments and Setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RBW	100kHz
VBW	300kHz
Detector	Peak
Trace	Max hold

14.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.

14.4 Block Diagram of Test setup




14.5 Test Result


PASS.

Please refer to the following pages.


Tx. Spurious 802.11b 2412MHz Ant1 Emission

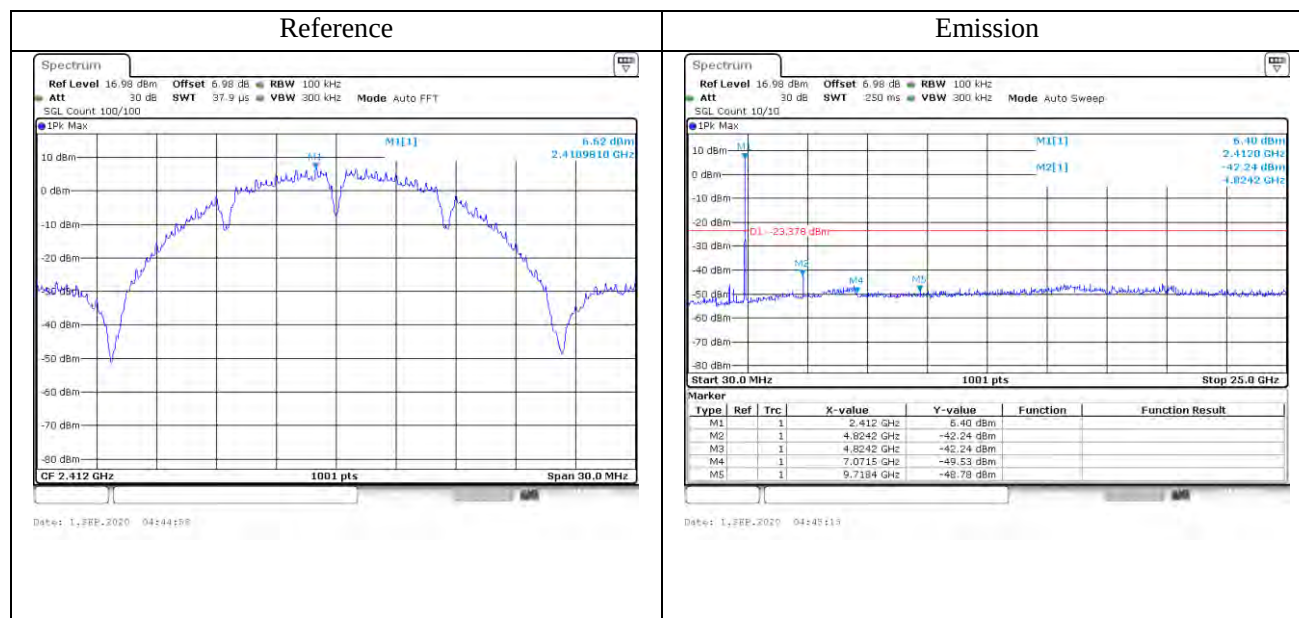


Tx. Spurious 802.11b 2437MHz Ant1 Emission

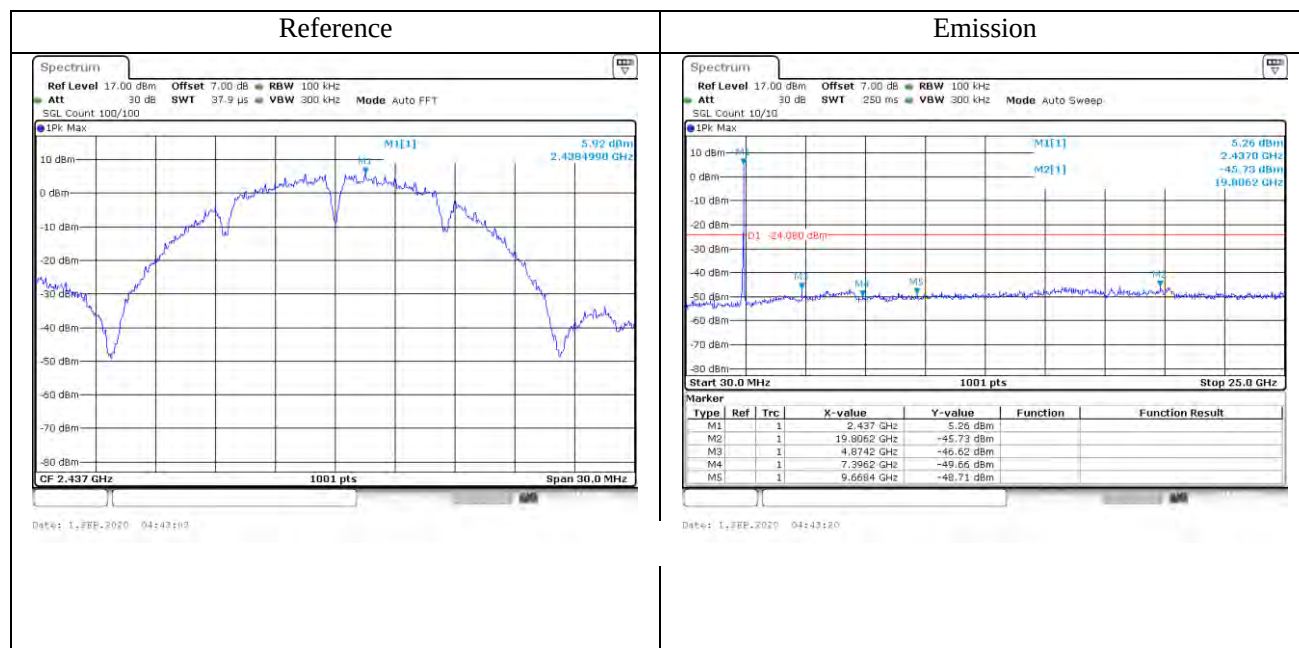


Tx. Spurious 802.11b 2462MHz Ant1 Emission

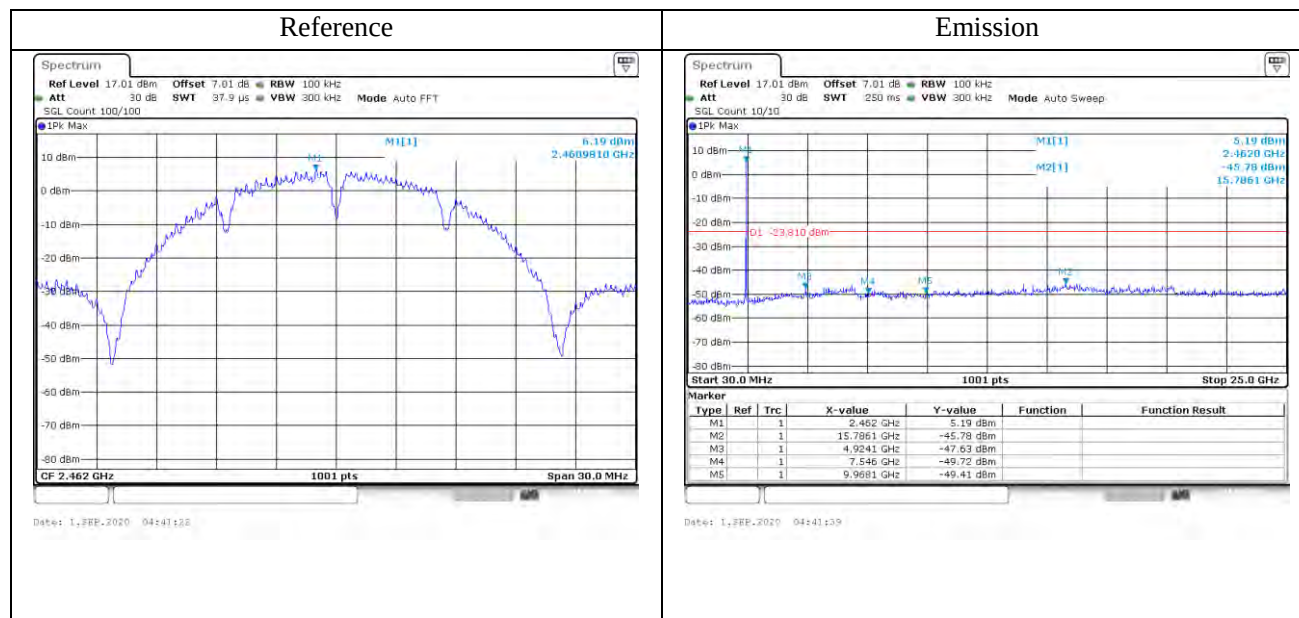


Tx. Spurious 802.11b 2412MHz Ant2 Emission

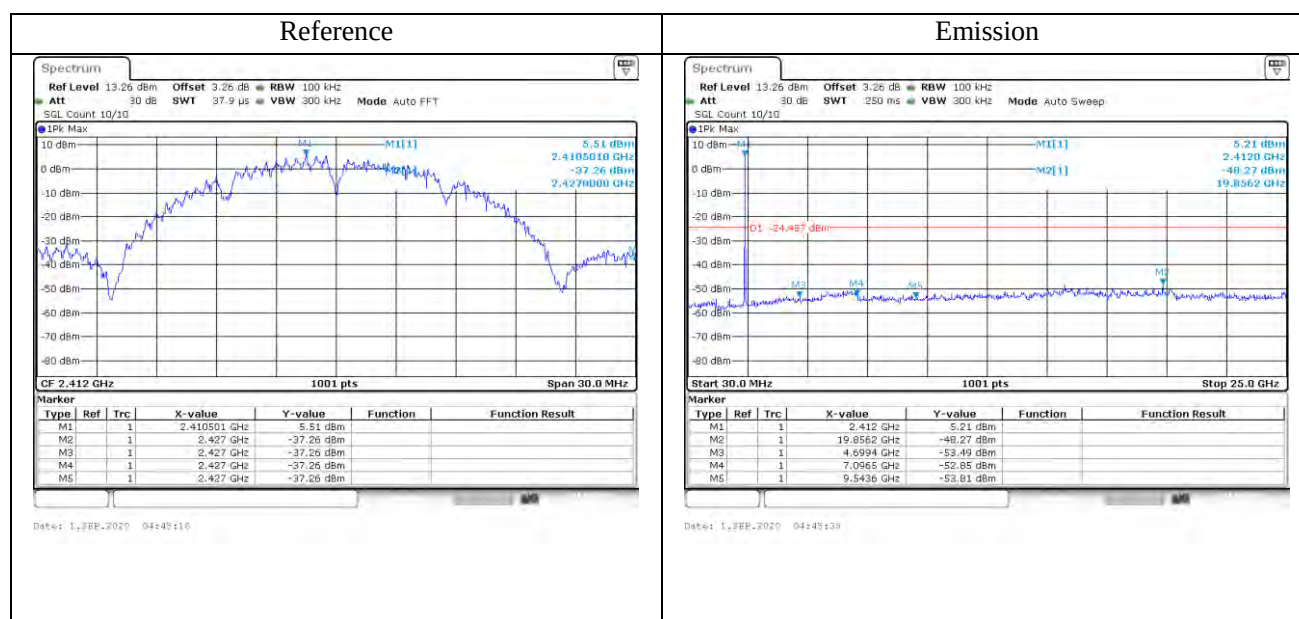


Tx. Spurious 802.11b 2437MHz Ant2 Emission

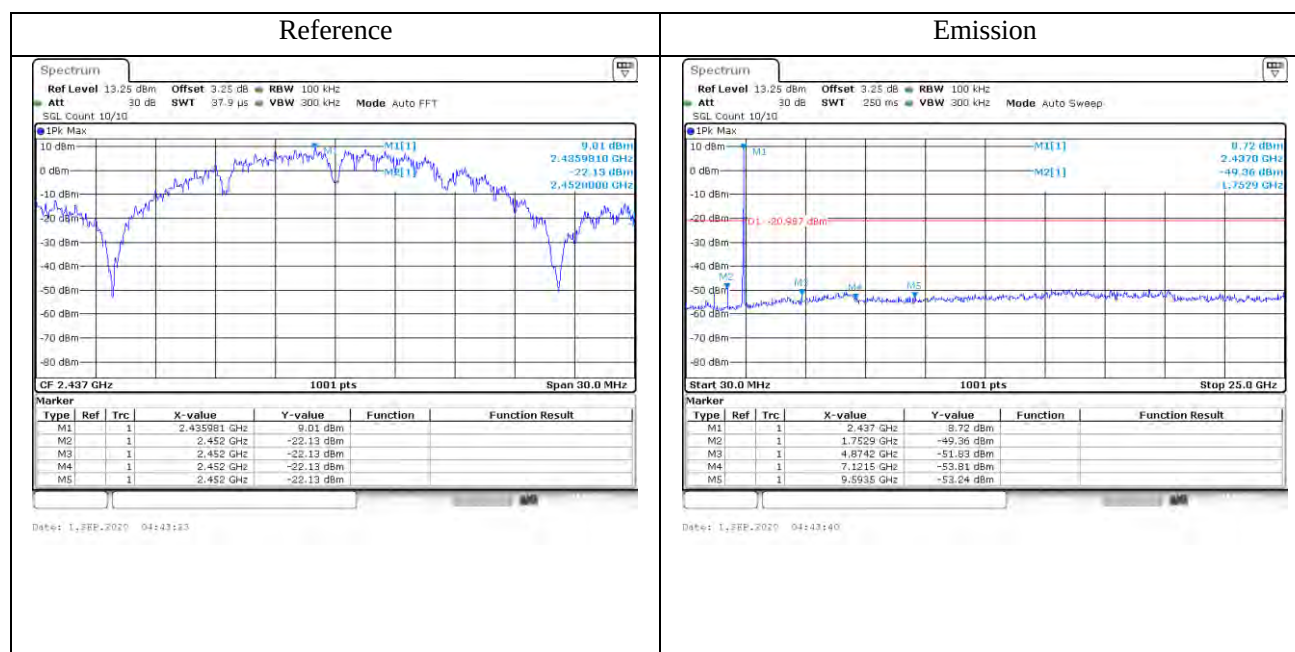


Tx. Spurious 802.11b 2462MHz Ant2 Emission

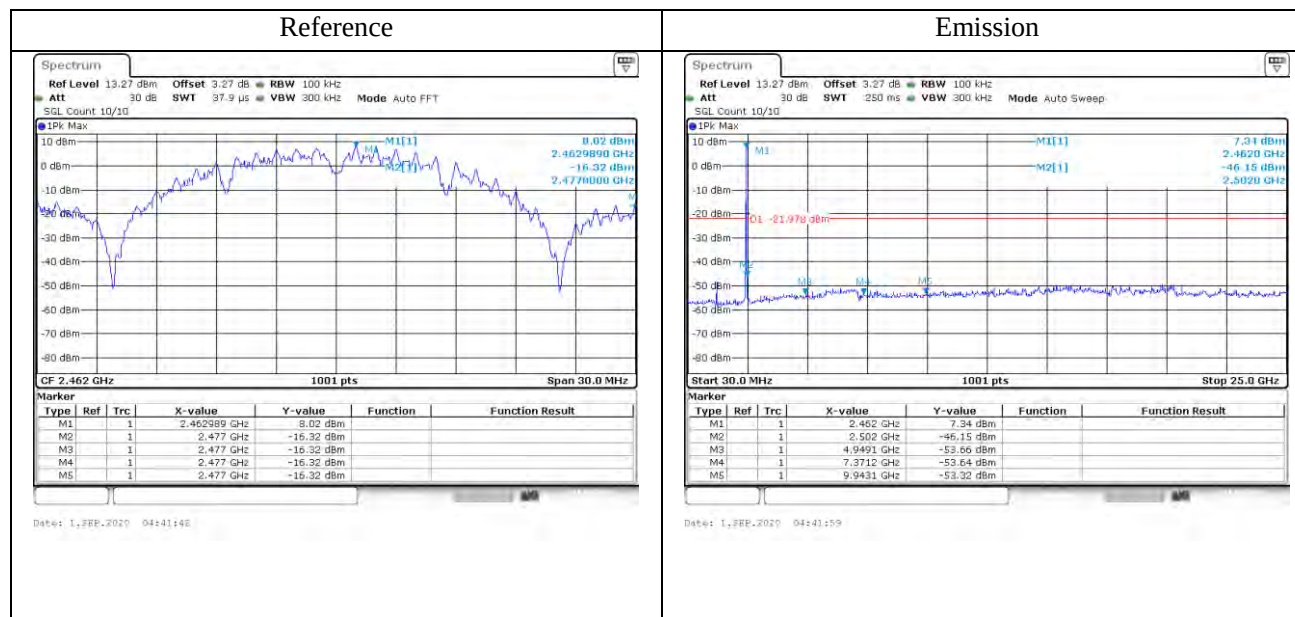


Tx. Spurious 802.11g 2412MHz Ant1 Emission

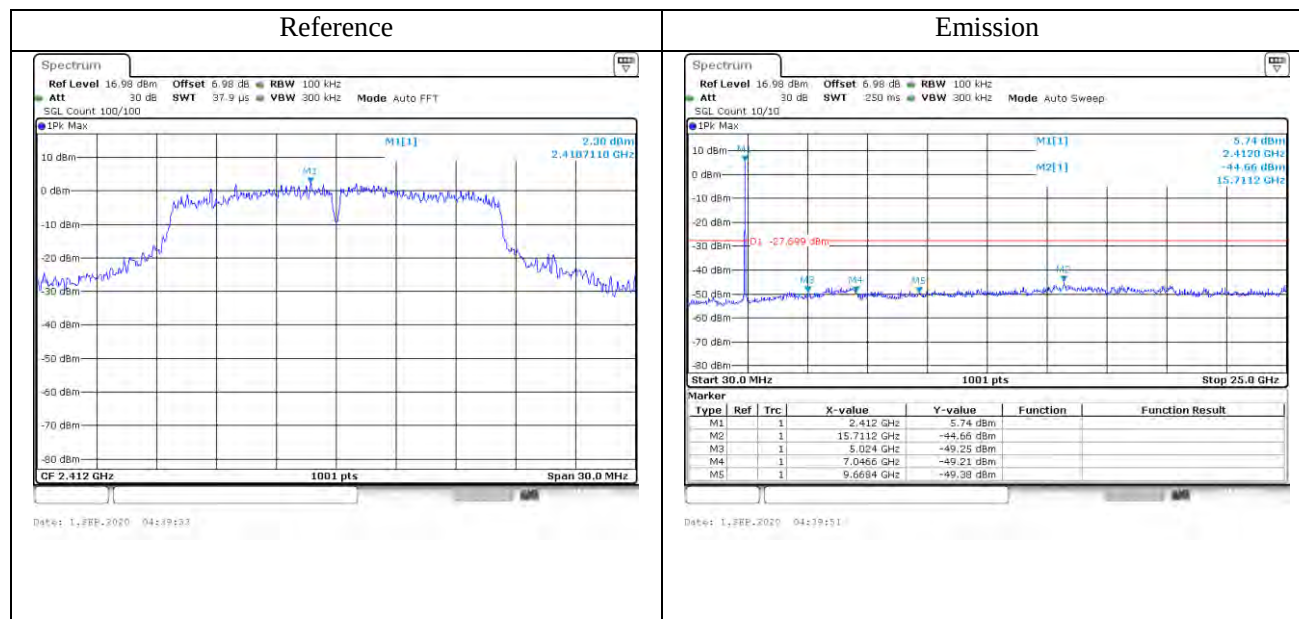


Tx. Spurious 802.11g 2437MHz Ant1 Emission


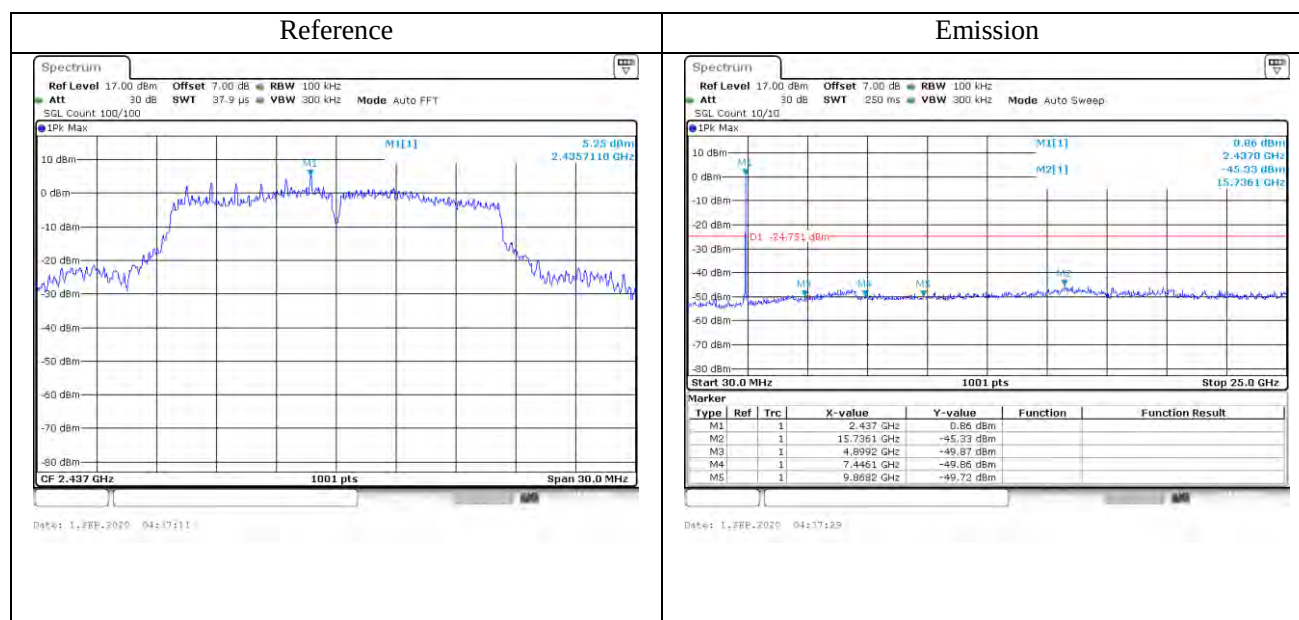




Tx. Spurious 802.11g 2462MHz Ant1 Emission


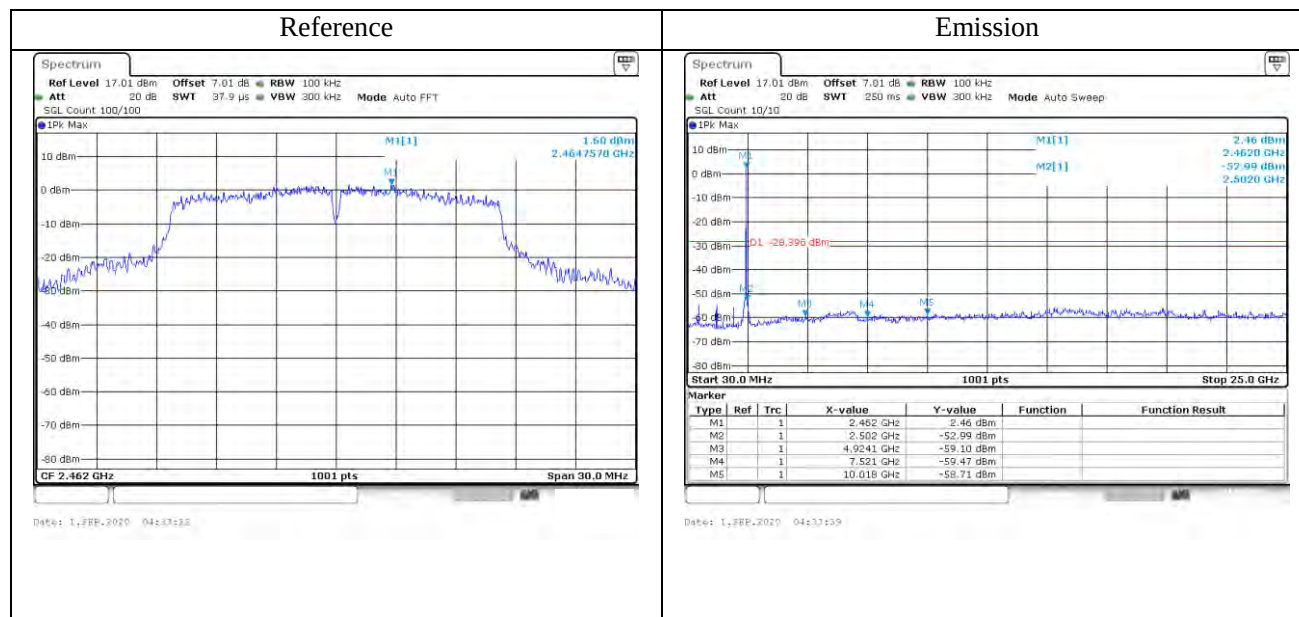




Tx. Spurious 802.11g 2412MHz Ant2 Emission

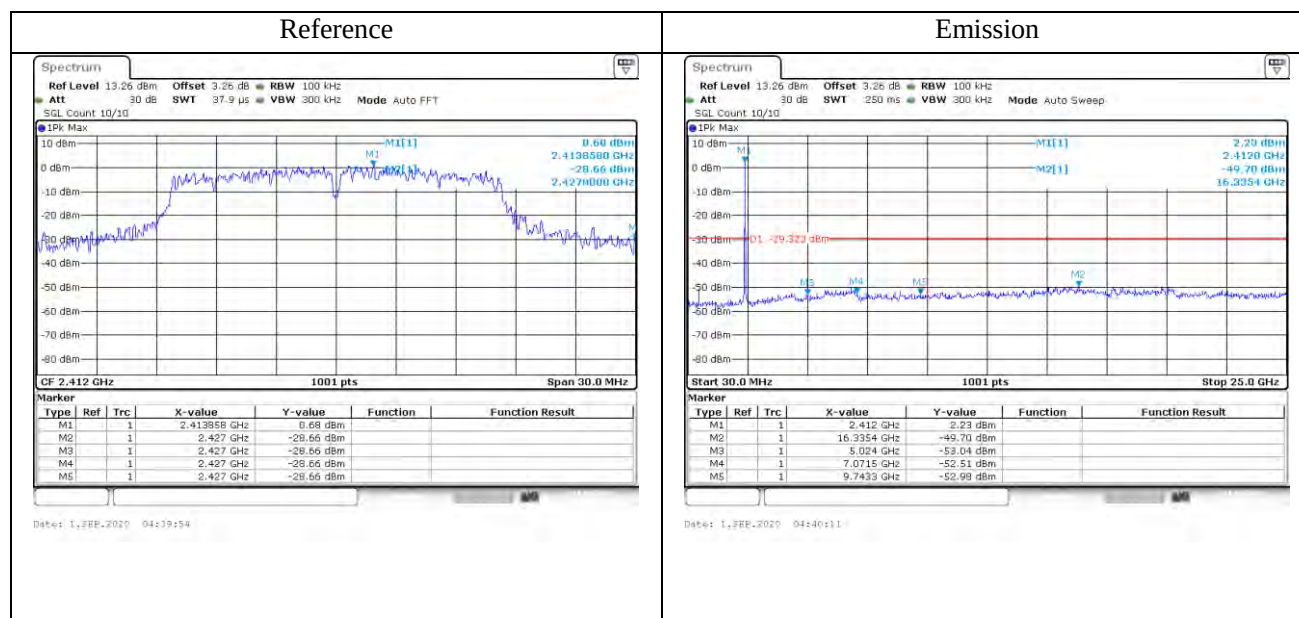

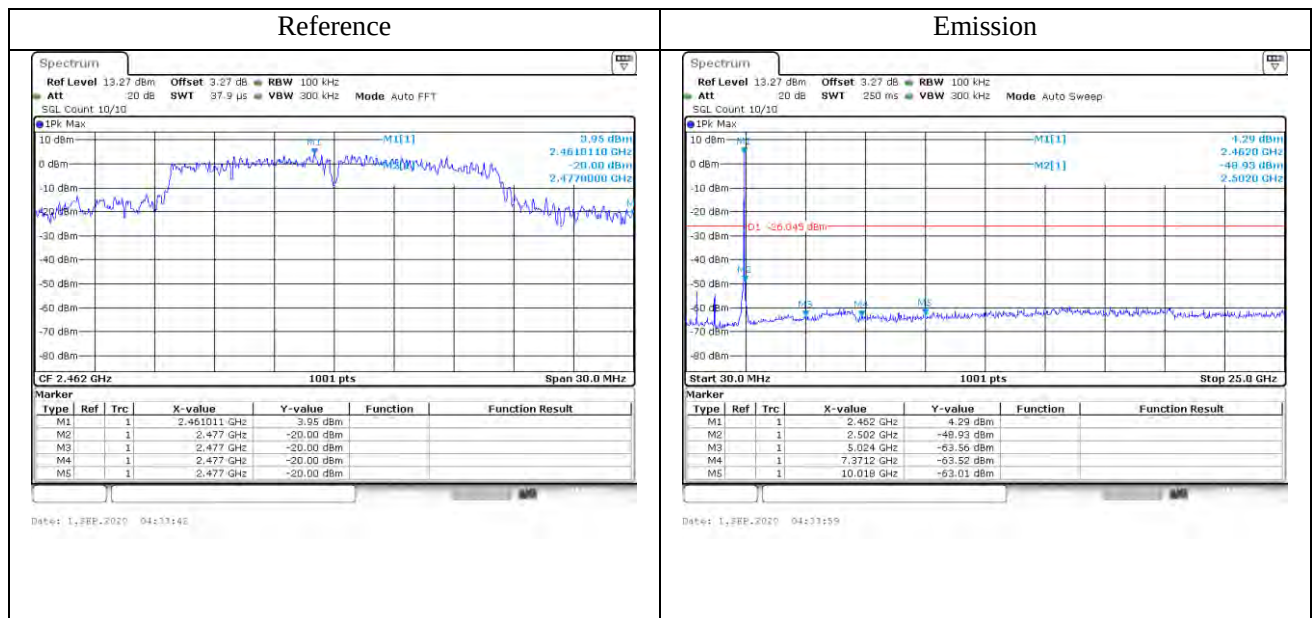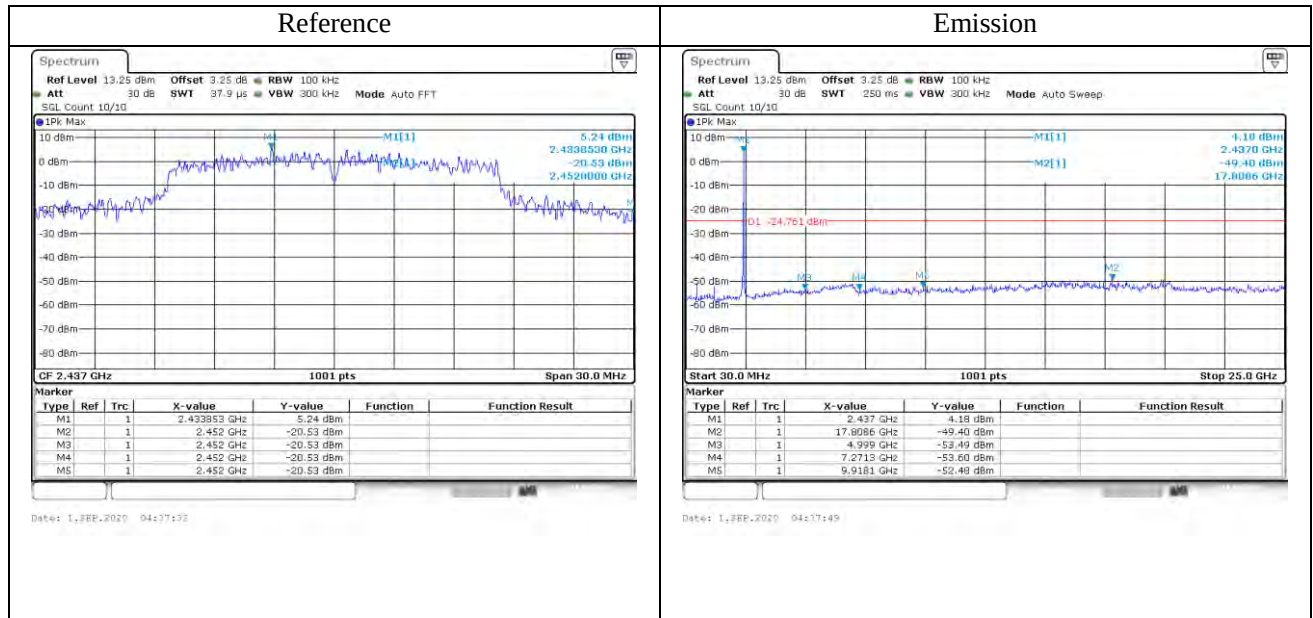

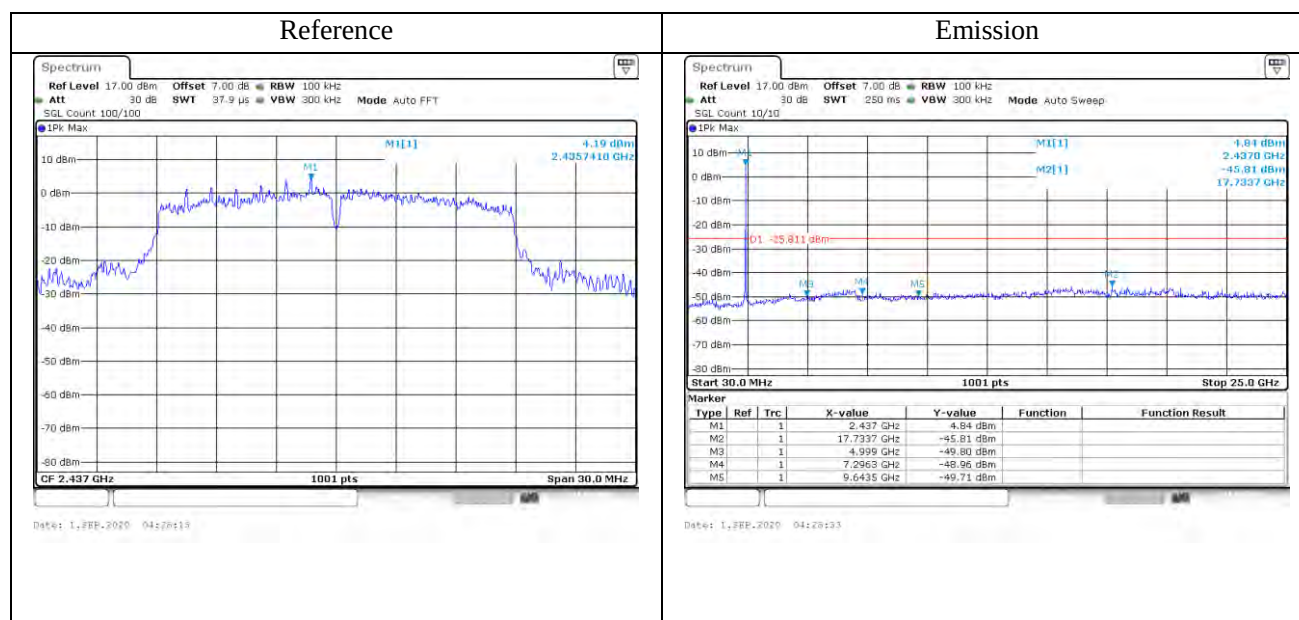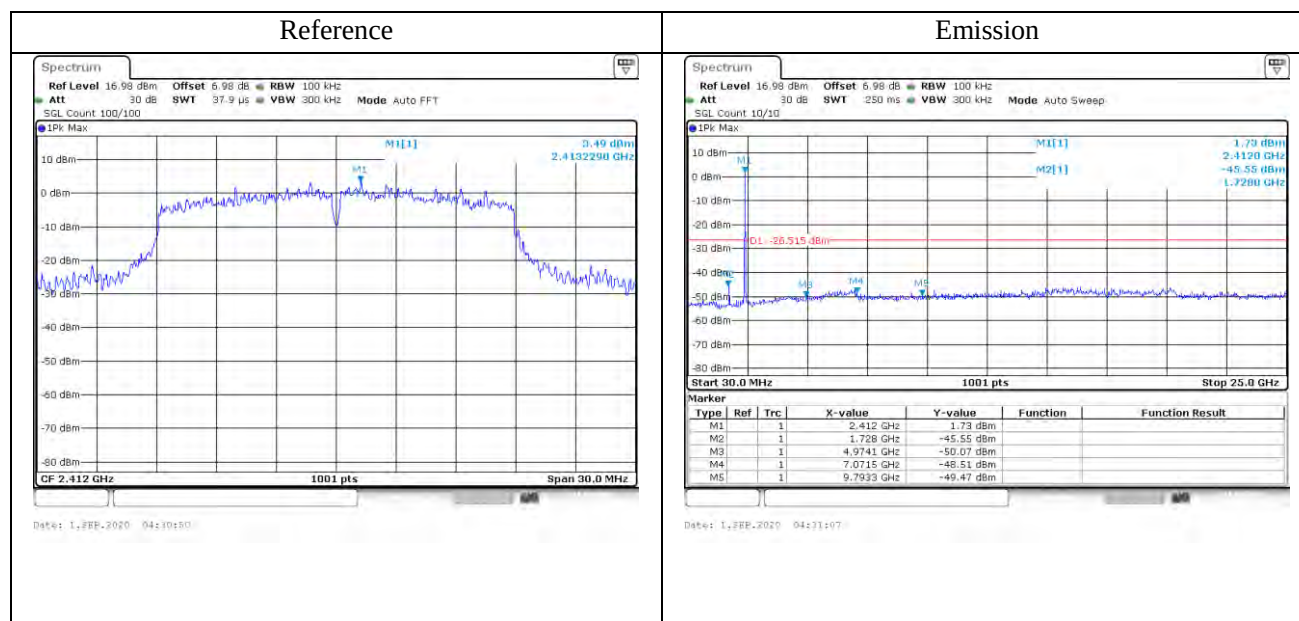

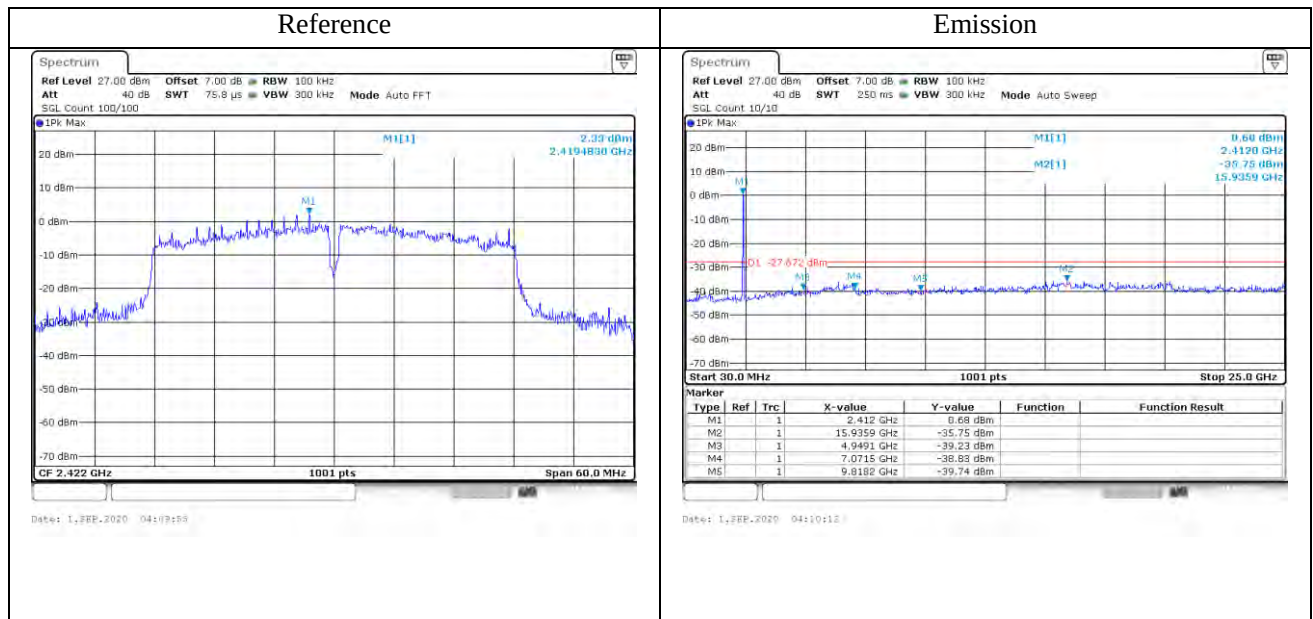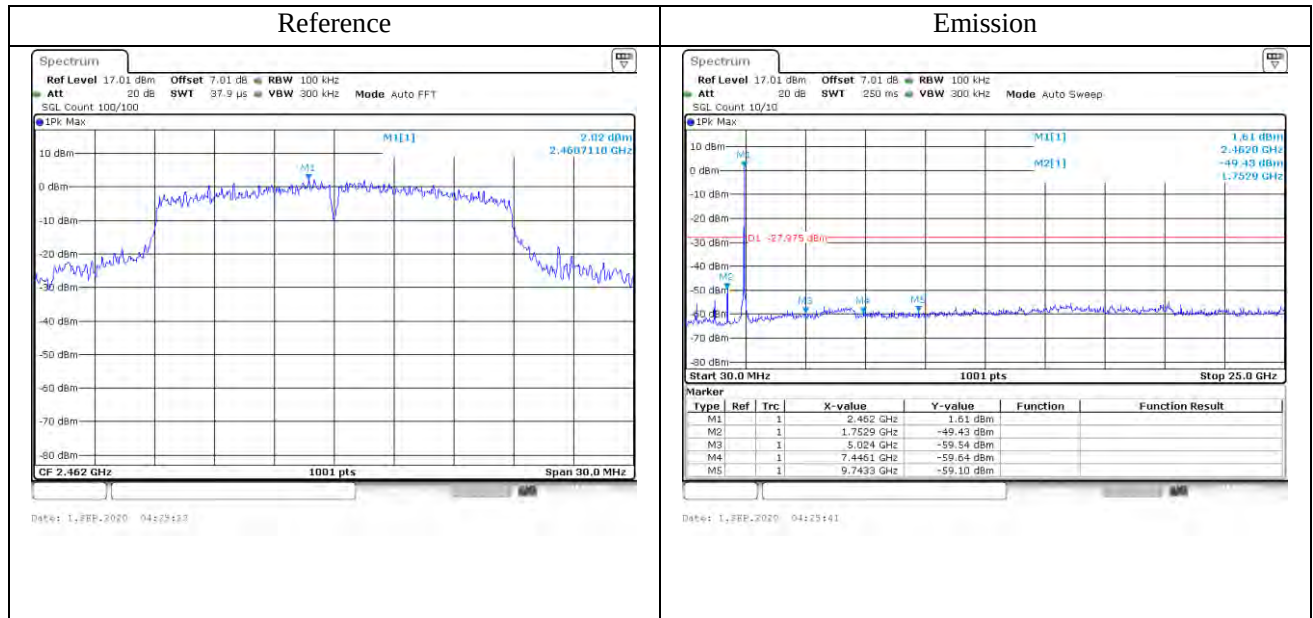

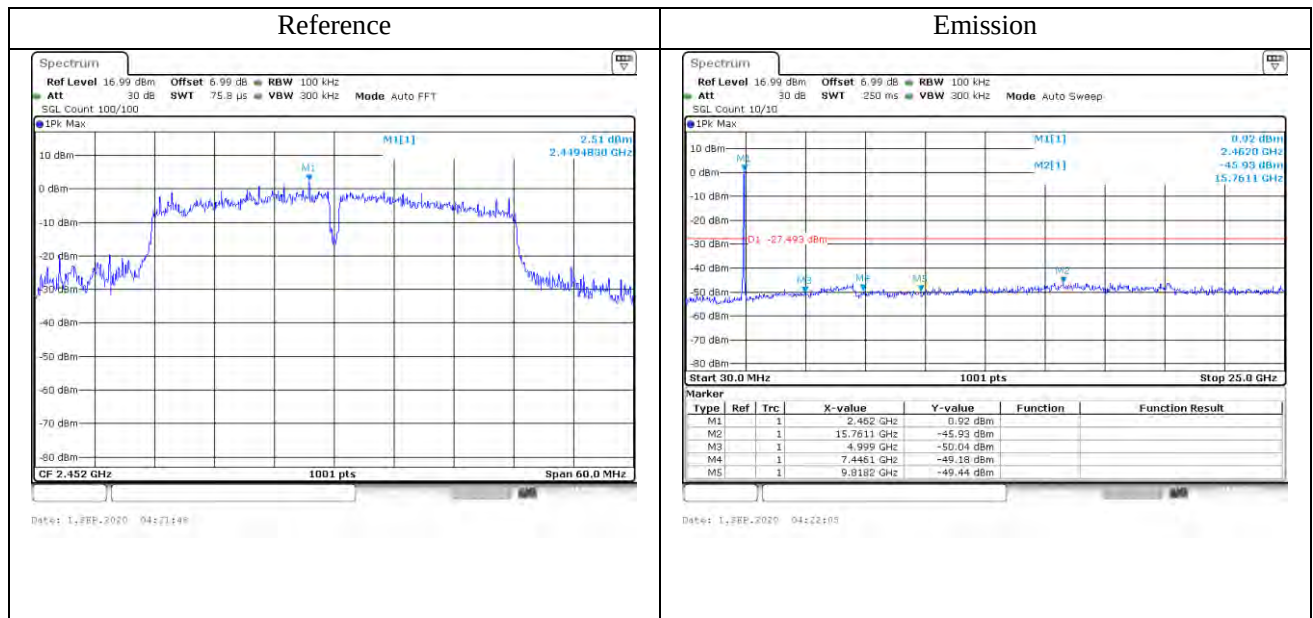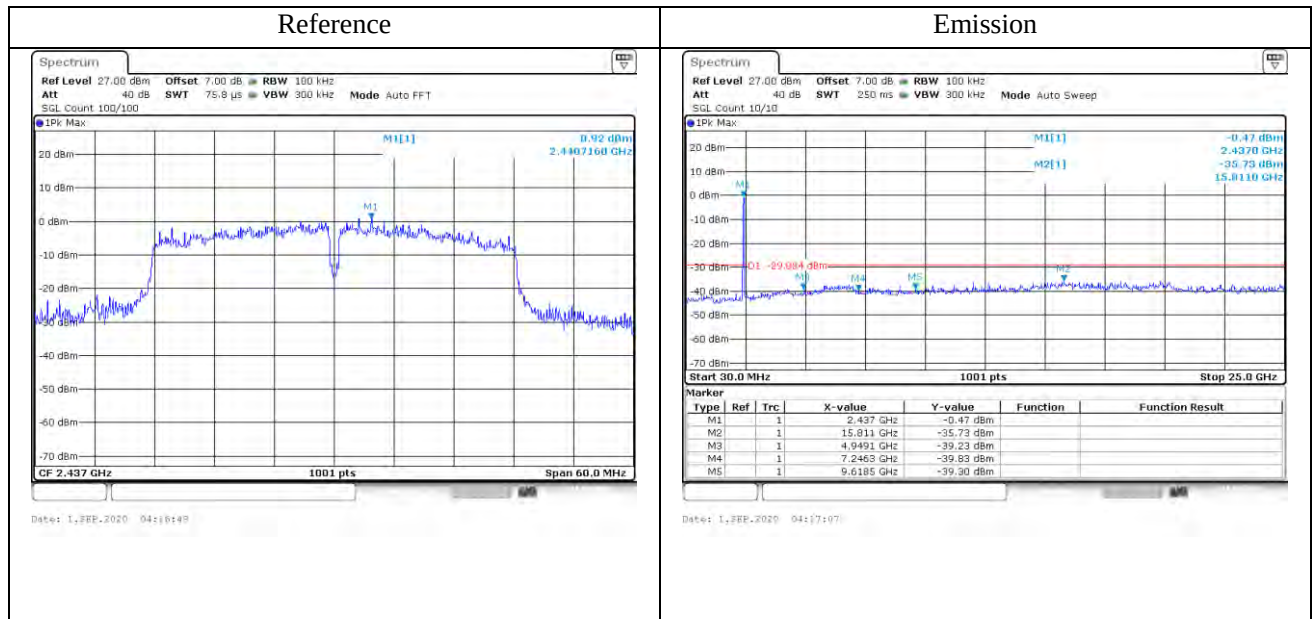

15. Antenna Application

15.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

15.2 Result

The EUT'S antenna is an Dipole antenna. The antenna's gain is 5.0dBi and meets the requirement. The antenna Connector is IPEX ANT Connector.

16. Photos of EUT

Please refer to external photos.pdf and internal photos.pdf.