




30MHz-1GHz

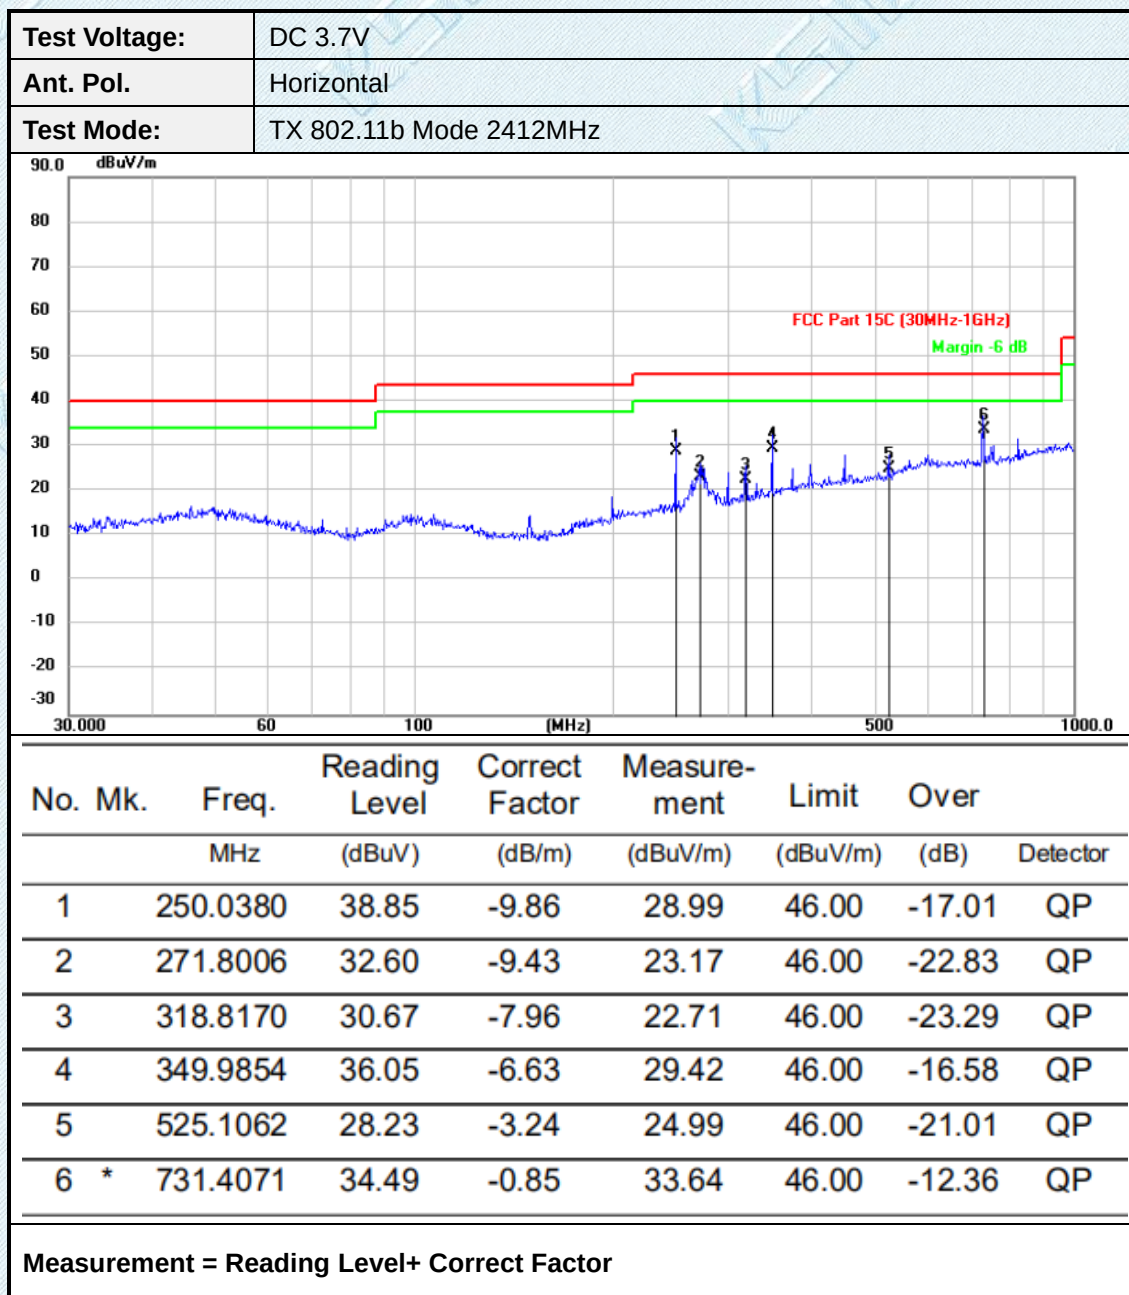

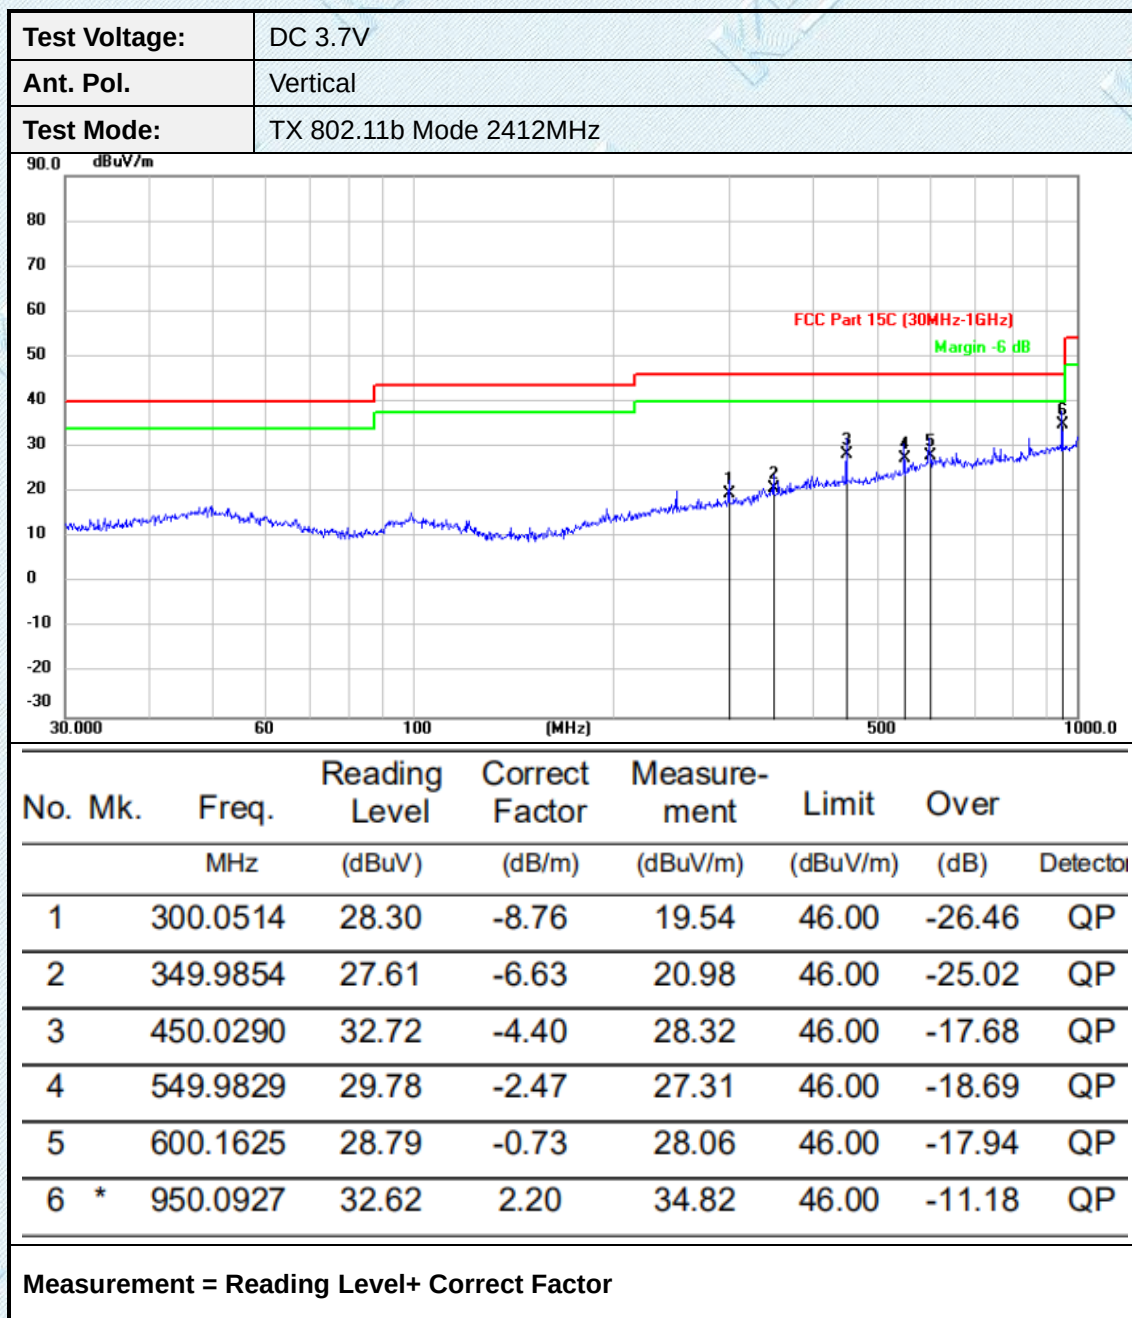


Adobe 1GHz

Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

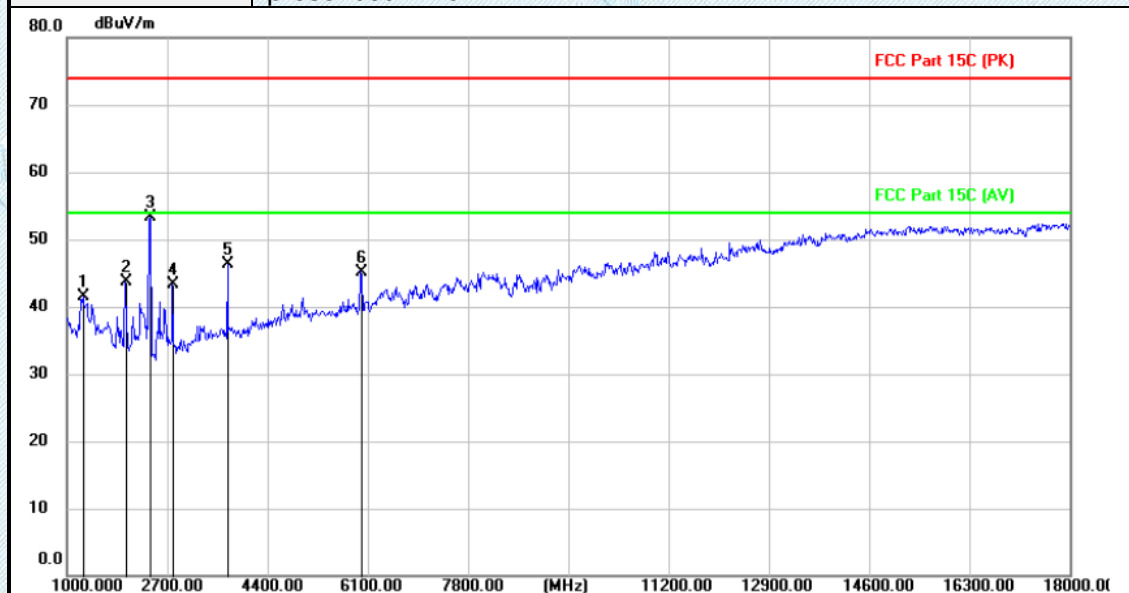


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1287.300	53.51	-11.99	41.52	74.00	-32.48	peak
2		1997.900	54.85	-11.06	43.79	74.00	-30.21	peak
3	*	2411.000	64.18	-10.91	53.27	74.00	-20.73	peak
4		2796.900	53.96	-10.71	43.25	74.00	-30.75	peak
5		3721.700	55.49	-9.12	46.37	74.00	-27.63	peak
6		5994.600	49.01	-3.81	45.20	74.00	-28.80	peak

Measurement = Reading level + Correct Factor

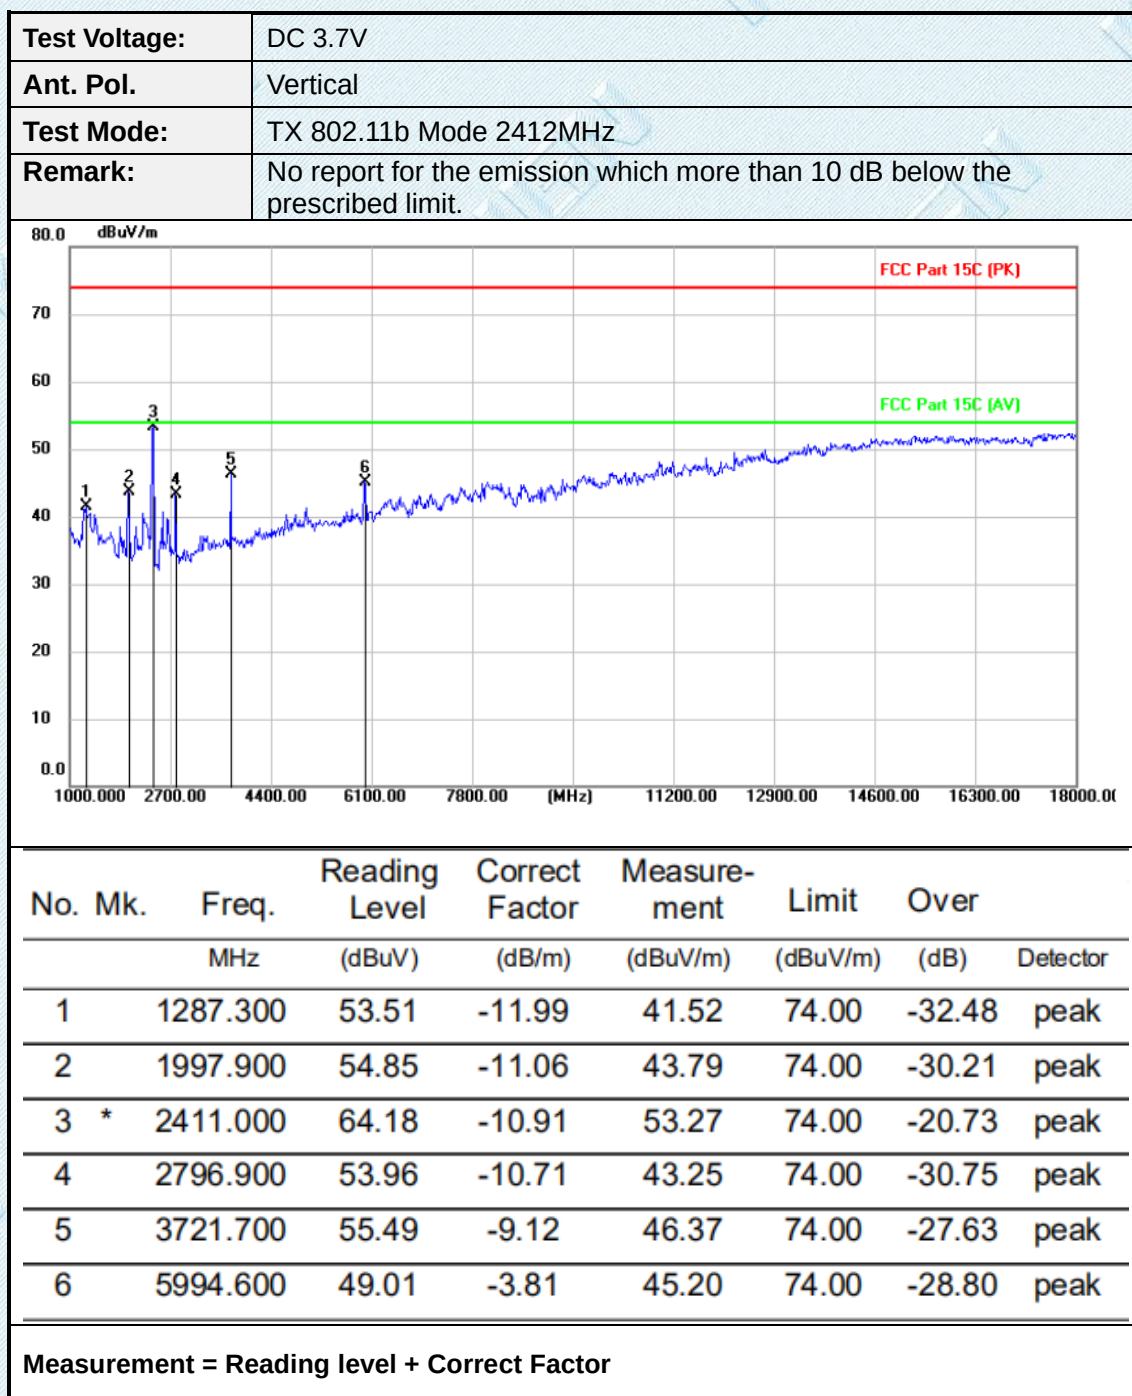


Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

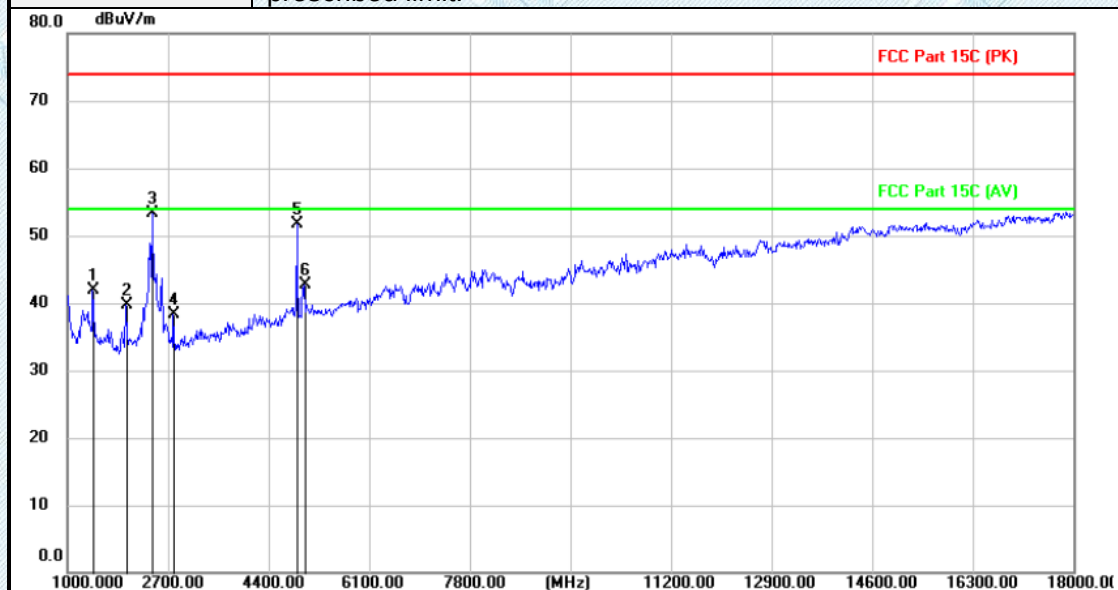

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1440.300	53.81	-11.84	41.97	74.00	-32.03	peak
2		1996.200	50.68	-11.06	39.62	74.00	-34.38	peak
3	*	2439.900	64.20	-10.90	53.30	74.00	-20.70	peak
4		2796.900	49.01	-10.71	38.30	74.00	-35.70	peak
5		4884.500	57.47	-5.70	51.77	74.00	-22.23	peak
6		5000.100	48.04	-5.39	42.65	74.00	-31.35	peak

Measurement = Reading level + Correct Factor


Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

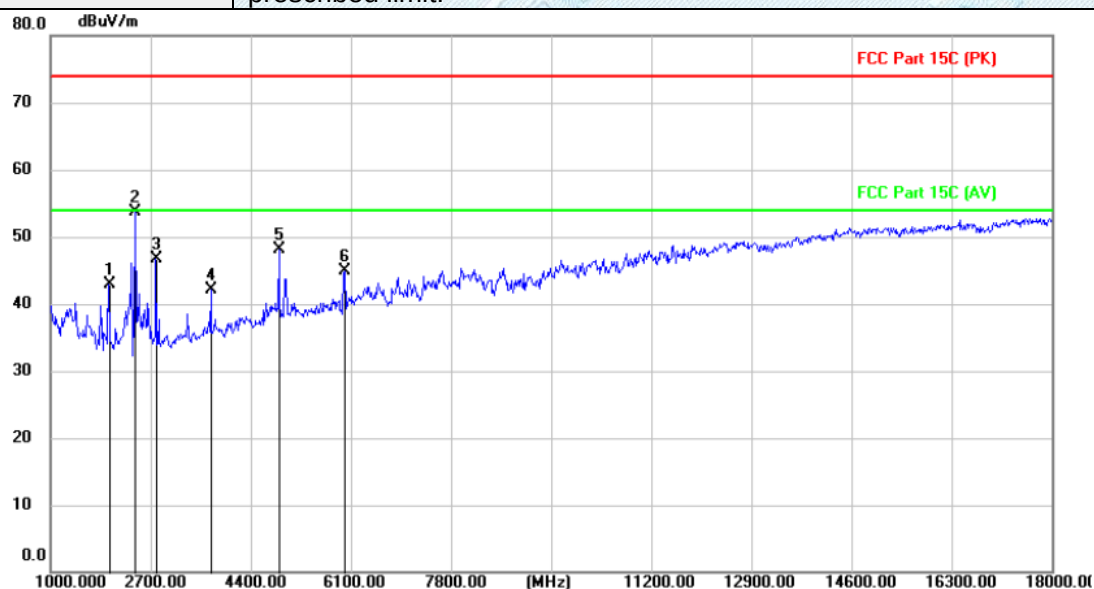

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1997.900	53.88	-11.06	42.82	74.00	-31.18	peak
2	*	2441.600	64.54	-10.90	53.64	74.00	-20.36	peak
3		2796.900	57.47	-10.71	46.76	74.00	-27.24	peak
4		3723.400	51.29	-9.12	42.17	74.00	-31.83	peak
5		4884.500	53.83	-5.70	48.13	74.00	-25.87	peak
6		5998.000	48.70	-3.81	44.89	74.00	-29.11	peak

Measurement = Reading level + Correct Factor


Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

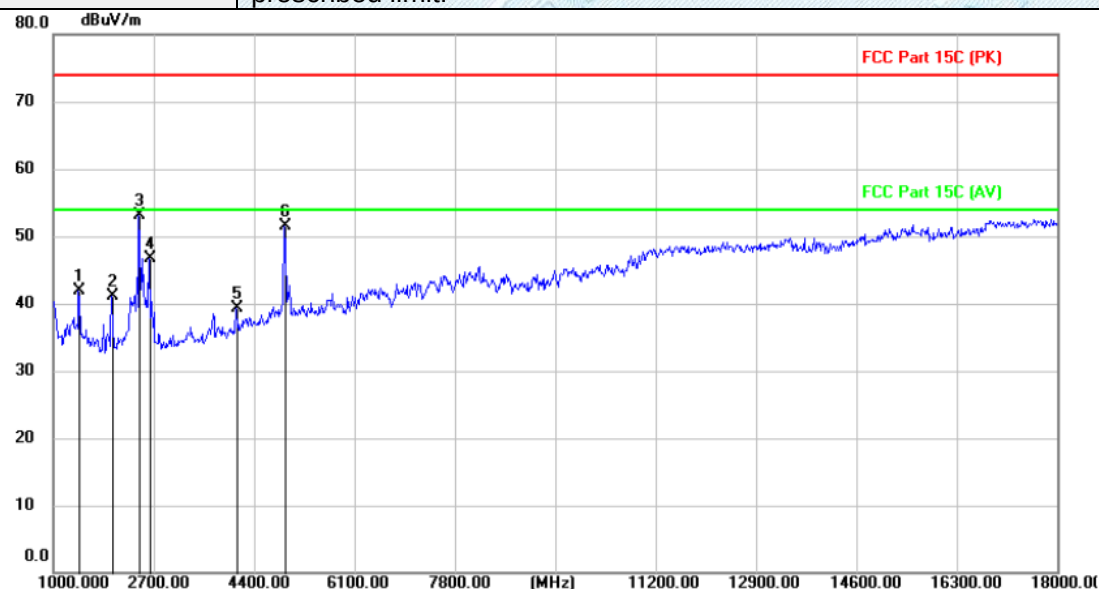

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	1436.900	53.81	-11.85	41.96	74.00	-32.04	peak
2	1992.800	52.17	-11.07	41.10	74.00	-32.90	peak
3 *	2458.600	63.99	-10.90	53.09	74.00	-20.91	peak
4	2618.400	57.50	-10.81	46.69	74.00	-27.31	peak
5	4105.900	47.41	-8.07	39.34	74.00	-34.66	peak
6	4923.600	57.18	-5.60	51.58	74.00	-22.42	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

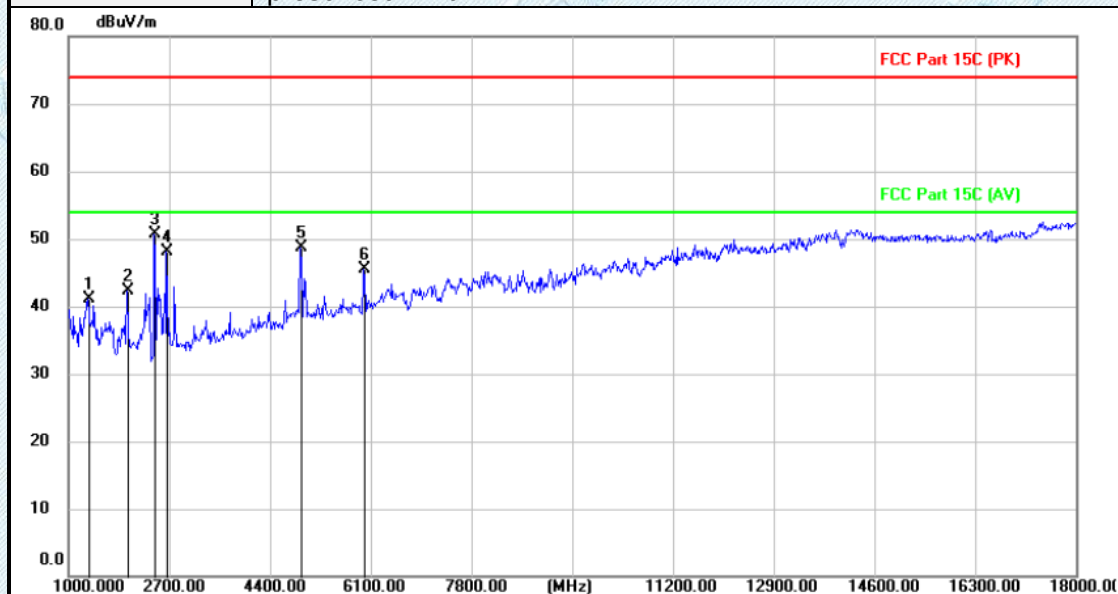

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1324.700	52.99	-11.96	41.03	74.00	-32.97	peak
2		1999.600	53.28	-11.06	42.22	74.00	-31.78	peak
3	*	2458.600	61.69	-10.90	50.79	74.00	-23.21	peak
4		2662.600	58.87	-10.79	48.08	74.00	-25.92	peak
5		4923.600	54.29	-5.60	48.69	74.00	-25.31	peak
6		5994.600	49.35	-3.81	45.54	74.00	-28.46	peak

Measurement = Reading level + Correct Factor

4.EUT TEST PHOTOS

Reference to the document No.: Test Photos.

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Reference to the document No.: External Photos and Internal Photos.

*****THE END*****