



MEASUREMENT REPORT

FCC PART 15.407/ WLAN 802.11a/n/ac/ax

FCC ID: 2AXJ4AX55V2

Applicant: TP-Link Corporation Limited

Application Type: Certification

Product: AX3000 Gigabit Wi-Fi 6 Router

Model No.: Archer AX55

Brand Name: tp-link

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01
KDB 662911 D01v02r01

Test Date: April 28 ~ July 16, 2020

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported here in relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2104RSU075-U2	Rev. 01	Initial Report	08-01-2021	Valid

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification	6
1.6. Working Frequencies.....	7
1.7. Antenna Details	8
1.8. Test Mode	8
1.9. Test System Connection Diagram.....	9
1.10. Test System Details.....	9
1.11. Description of Test Software	9
1.12. Duty Cycle	10
1.13. Test Environment Condition	12
2. ANTENNA REQUIREMENTS.....	13
3. TEST EQUIPMENT CALIBRATION DATE	14
4. MEASUREMENT UNCERTAINTY.....	18
5. TEST RESULT	19
5.1. Summary	19
5.2. 26dB Bandwidth Measurement.....	20
5.2.1. Test Limit	20
5.2.2. Test ProcedureUsed	20
5.2.3. Test Setting.....	20
5.2.4. Test Setup	20
5.2.5. Test Result.....	21
5.3. 6dB Bandwidth Measurement.....	36
5.3.1. Test Limit	36
5.3.2. Test Procedure Used	36
5.3.3. Test Setting.....	36
5.3.4. Test Setup	36
5.3.5. Test Result.....	37
5.4. Output Power Measurement	42
5.4.1. Test Limit	42
5.4.2. Test Procedure Used	42
5.4.3. Test Setting.....	42

5.4.4. Test Setup	42
5.4.5. Test Result.....	43
5.5. Transmit Power Control	46
5.5.1. Test Limit	46
5.5.2. Test Procedure Used	46
5.5.3. Test Setting.....	46
5.5.4. Test Setup	46
5.5.5. Test Result.....	46
5.6. Power Spectral Density Measurement	47
5.6.1. Test Limit	47
5.6.2. Test Procedure Used	47
5.6.3. Test Setting.....	47
5.6.4. Test Setup	48
5.6.5. Test Result.....	49
5.7. Radiated Spurious Emission Measurement	81
5.7.1. Test Limit	81
5.7.2. Test Procedure Used	81
5.7.3. Test Setting.....	81
5.7.4. Test Setup	83
5.7.5. Test Result.....	84
5.8. Radiated Restricted Band Edge Measurement	161
5.8.1. Test Limit	161
5.8.2. Test Procedure Used	162
5.8.3. Test Setting.....	163
5.8.4. Test Setup	164
5.8.5. Test Result.....	165
5.9. AC Conducted Emissions Measurement.....	303
5.9.1. Test Limit	303
5.9.2. Test Setup	303
5.9.3. Test Result.....	304
6. CONCLUSION.....	306
Appendix A - Test Setup Photograph	307
Appendix B - EUT Photograph.....	308

1. General Information

1.1. Applicant

TP-Link Corporation Limited

Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong

1.2. Manufacturer

TP-Link Corporation Limited

Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou – Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou – SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: R-20025, G-20034, C-20020, T-20020
☒	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	AX3000 Gigabit Wi-Fi 6 Router
Model No.	Archer AX55
Brand Name	tp-link
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Antenna Specification	Refer to section 1.7
Serial No.	FY09151528 (Conducted) FY09151538 (Radiated & AC conducted emission)
Power Supply	AC/DC Adapter
Accessories	
AC/DC Adapter	Model No.: T120150-2B1 Input: 100-240V, 50/60Hz, 0.6A Output: 12V, 1.5A
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690 MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.4Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	T _x Paths	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Dipole Antenna	2412 ~ 2462	2	3.82	6.83	3.82	6.83
	5150 ~ 5250	2	2.17	5.18	2.17	5.18
	5250 ~ 5350	2	2.25	5.26	2.25	5.26
	5470 ~ 5725	2	2.80	5.81	2.80	5.81
	5725 ~ 5850	2	2.94	5.95	2.94	5.95

Note 1: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

Note 2: The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain = $G_{ANT} + 10 \log (N_{ANT})$.

1.8. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps) (CDD mode)
	Mode 2: Transmit by 802.11ac-VHT20 (MCS0) (CDD mode)
	Mode 3: Transmit by 802.11ac-VHT40 (MCS0) (CDD mode)
	Mode 4: Transmit by 802.11ac-VHT80 (MCS0) (CDD mode)
	Mode 5: Transmit by 802.11ac-VHT160 (MCS0) (CDD mode)
	Mode 6: Transmit by 802.11ax-HE20 (MCS0) (CDD mode)
	Mode 7: Transmit by 802.11ax-HE40 (MCS0) (CDD mode)
	Mode 8: Transmit by 802.11ax-HE80 (MCS0) (CDD mode)
	Mode 9: Transmit by 802.11ax-HE160 (MCS0) (CDD mode)
	Mode 10: Transmit by 802.11ac-VHT20 (MCS0) (Beamforming mode)
	Mode 11: Transmit by 802.11ac-VHT40 (MCS0) (Beamforming mode)
	Mode 12: Transmit by 802.11ac-VHT80 (MCS0) (Beamforming mode)
	Mode 13: Transmit by 802.11ac-VHT160 (MCS0) (Beamforming mode)
	Mode 14: Transmit by 802.11ax-HE20 (MCS0) (Beamforming mode)


	Mode 15: Transmit by 802.11ax-HE40 (MCS0) (Beamforming mode)
	Mode 16: Transmit by 802.11ax-HE80 (MCS0) (Beamforming mode)
	Mode 17: Transmit by 802.11ax-HE160 (MCS0) (Beamforming mode)

Note 1: Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, meanwhile, power setting for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.

Note 2: Due to CDD mode was the worst mode, so all test items were evaluated in this report. The beamforming mode only evaluated the RF output power.

1.9. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

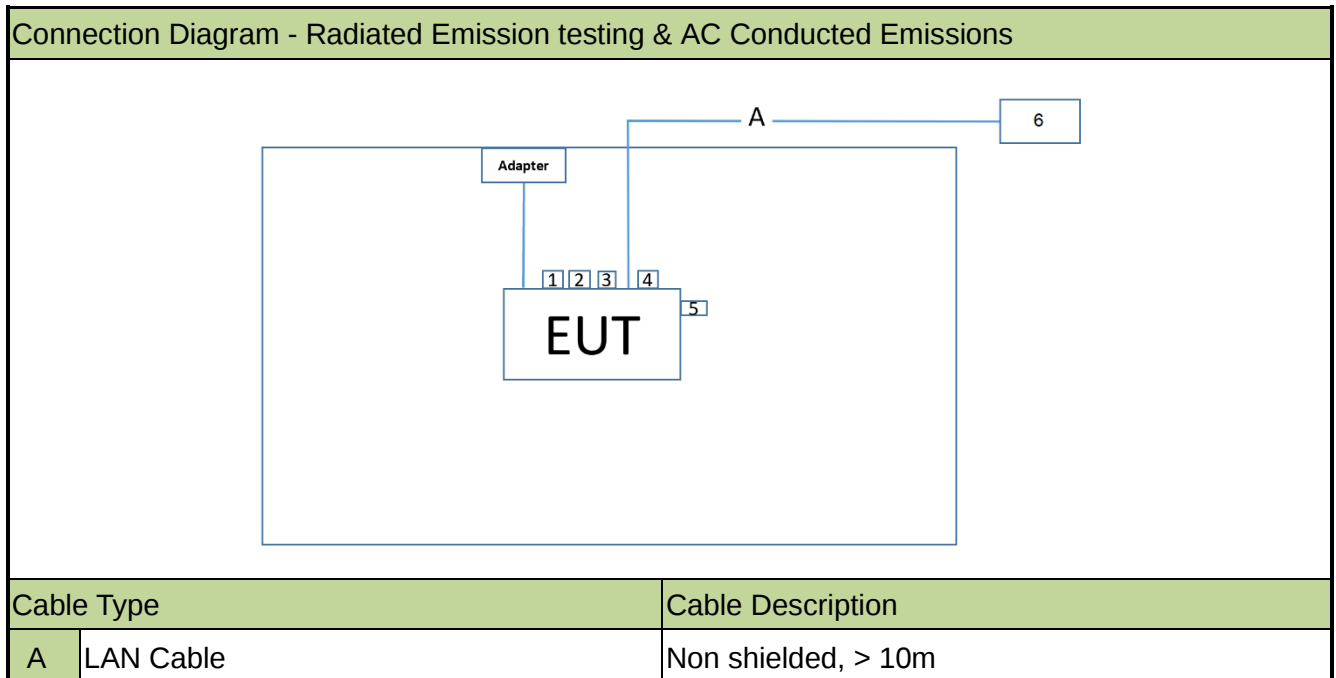

1.10. Test System Details

Product	Manufacturer	Model No.
1~4	Simulated load	N/A
5	USB flash disk	SanDisk
6	Notebook	Lenovo

1.11. Description of Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.0.0.5.



Note: Final power setting please refer to operational description.

1.12. Duty Cycle

5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	94.89%
802.11ac-VHT20	98.26%
802.11ac-VHT40	96.88%
802.11ac-VHT80	93.79%
802.11ac-VHT160	89.20%
802.11ax-HE20	97.50%
802.11ax-HE40	95.79%
802.11ax-HE80	92.24%
802.11ax-HE160	87.64%

Duty Cycle (T = Transmission Duration)	
802.11a (T = 2.060ms)	802.11ac-VHT20 (T = 1.923ms)

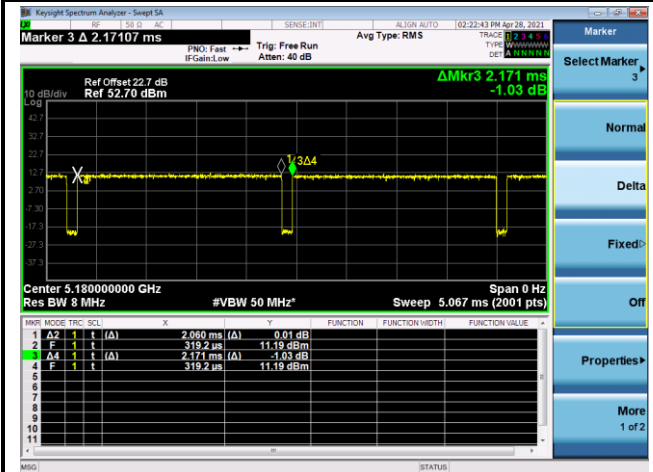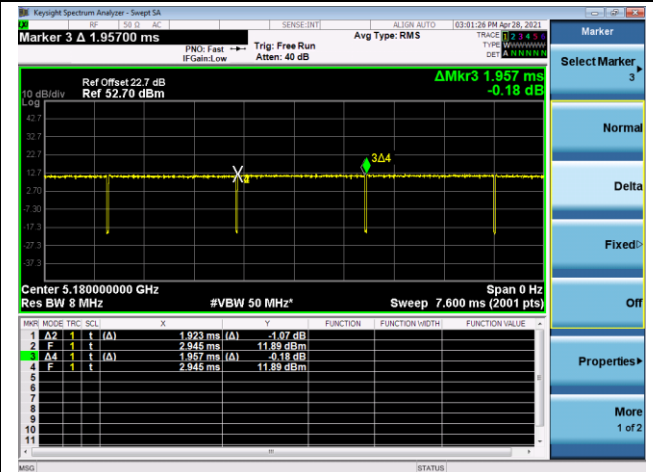



Duty Cycle (T = Transmission Duration)


802.11ac-VHT40 (T = 950.7us)

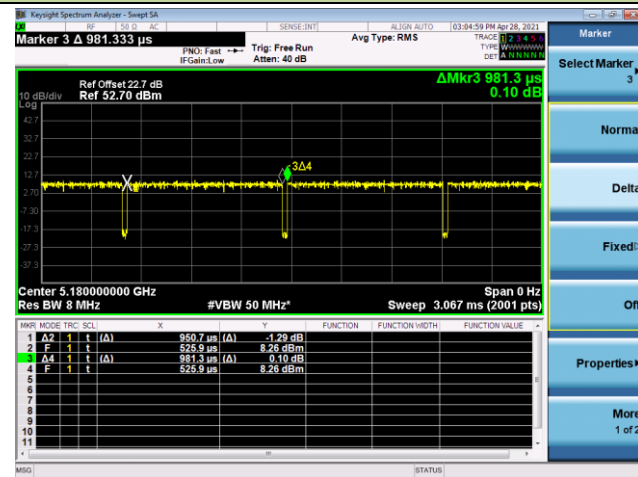


802.11ac-VHT80 (T = 459.2us)

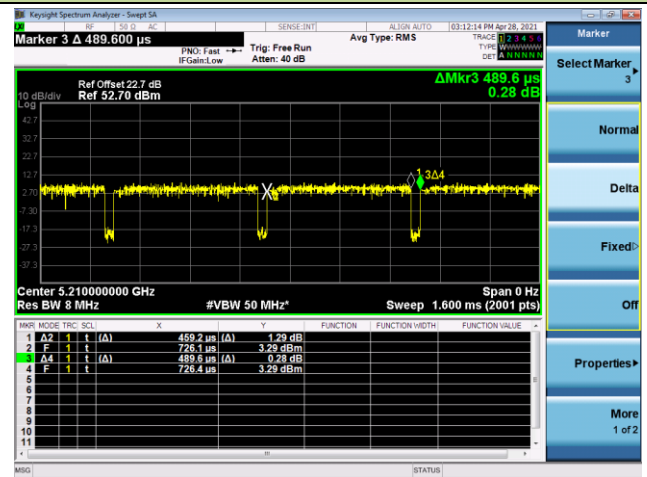


802.11ac-VHT160 (T = 251.2us)

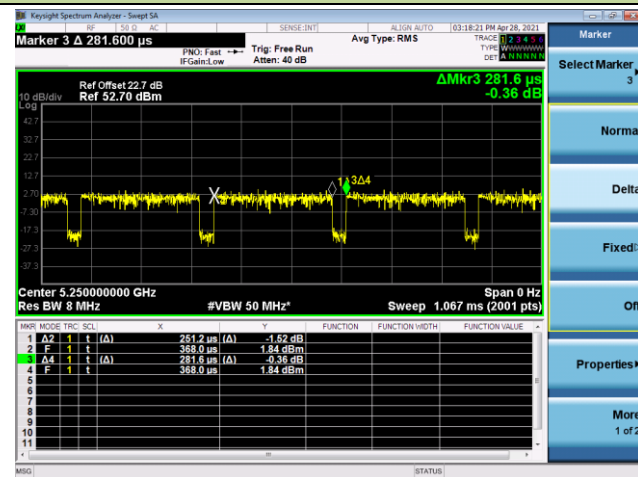


802.11ax-HE20 (T = 1.482ms)

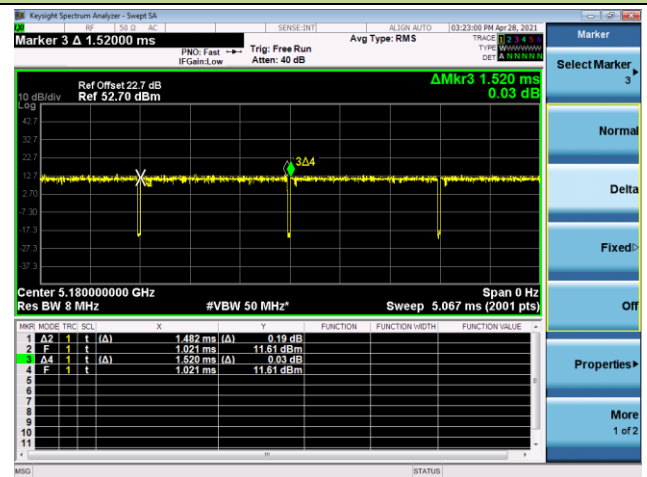

802.11ax-HE40 (T = 769.7us)

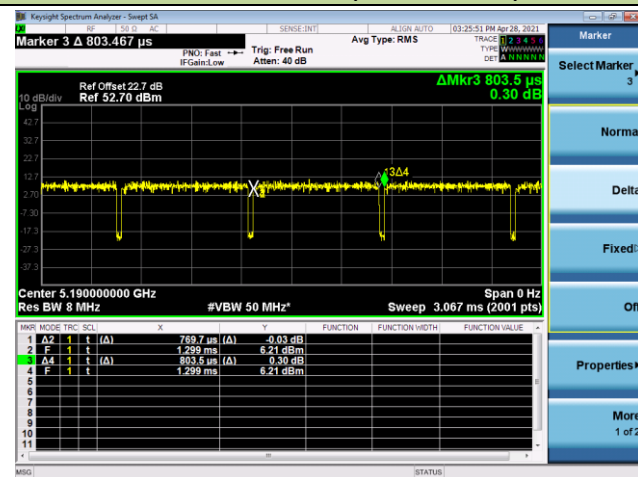


802.11ax-HE80 (T = 399.2us)

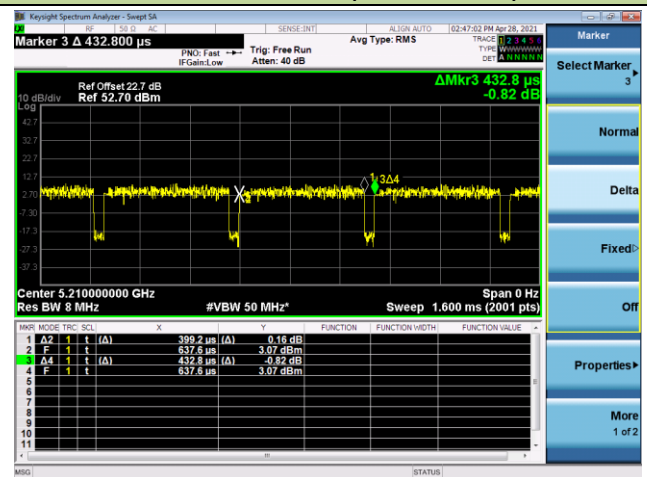

Duty Cycle (T = Transmission Duration)

802.11ax-HE160 (T = 230.4us)

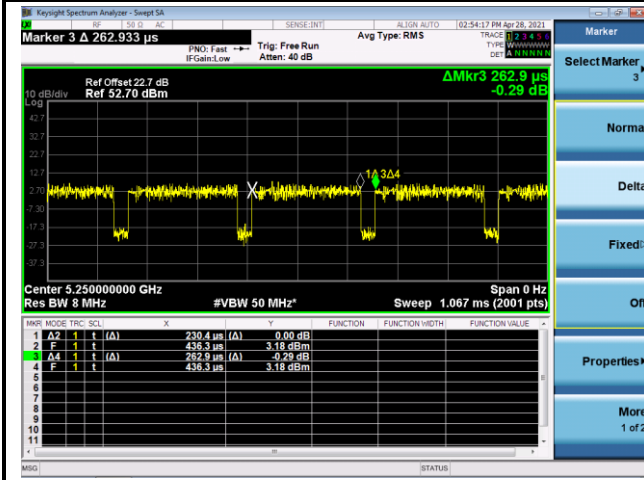

1.13. Test Environment Condition

Ambient Temperature	15°C~35°C
Relative Humidity	20%RH ~75%RH

2. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

3. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2021/11/22
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2022/06/28
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2022/06/28
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/05/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/09
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/09
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/12
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/14
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/13
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/06
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2022/06/08
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2022/06/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2022/06/08
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Attenuator	MVE	3dB	MRTSUE06529	1 year	2021/12/12
Attenuator	MVE	6dB	MRTSUE06534	1 year	2021/12/12
Attenuator	MVE	10dB	MRTSUE06540	1 year	2021/12/12
Attenuator	MVE	20dB	MRTSUE06547	1 year	2021/12/12
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/21
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2022/06/28

Conducted Test Equipment (SIP-TR1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Attenuator	MVE	3dB	MRTSUE06530	1 year	2021/12/12
Attenuator	MVE	6dB	MRTSUE06535	1 year	2021/12/12
Attenuator	MVE	10dB	MRTSUE06541	1 year	2021/12/12
Attenuator	MVE	20dB	MRTSUE06548	1 year	2021/12/12
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2022/02/23
Thermal Hygrometer	testo	608-H1	MRTSUE11022	1 year	2021/11/25

Conducted Test Equipment (NS-TR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Thermal Hygrometer	DELI	No.8813	MRTSUE06783	1 year	2022/05/09
EXA Signal Analyzer	Keysight	N9010A	MRTSUE06195	1 year	2022/03/17
Temperature/Humidity Chamber	OK	OUKE INSTRUMENT	MRTSUE06899	1 year	2021/11/27
USB wideband power sensor	Keysight	U2021XA	MRTSUE06581	1 year	2021/08/20

Transmitter Spurious Emissions and Receiver Spurious Emissions (NS-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cal. Due Date
EXA Signal Analyzer	Keysight	N9010A	MRTSUE06195	1 year	2022/03/17
EXA Signal Analyzer	Keysight	N9020A-526	MRTSUE10065	1 year	2022/06/17
EMI Test Receiver	ROHDE&SCH WARZ	ESR3	MRTSUE06575	1 year	2022/06/27
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2021/10/24
Broad-Band Horn Antenna	Schwarzbeck	9120D	MRTSUE06572	1 year	2022/03/14
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2022/06/29
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2022/07/12
Temperature/Humidity Meter	DELI	NO.8813	MRTSUE06588	1 year	2022/06/30
Anechoic Chamber	BOOMWAVE	AC1	MRTSUE06496	1 year	2022/07/24

Software	Version	Function
EMI Software	V3	EMI Test Software

4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

5. TEST RESULT

5.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 5.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 5.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to Section 5.4		Pass	Section 5.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{dBm}$		Pass	Section 5.5
15.407(a)(1)(ii), (2), (3)	Power Spectral Density	U-NII-1&U-NII-2: $\leq 11\text{dBm/MHz}$ U-NII-3: $\leq 30\text{dBm}/500\text{kHz}$		Pass	Section 5.6
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 5.8	Radiated	Pass	Section 5.7 Section 5.8
15.205, 15.209 15.407(b)(7), (8), (9)	General Field Strength (Restricted Bands and Radiated Emission)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz-30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 5.9

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- Test Items "26dB Bandwidth" & "6dB Bandwidth" showed the worst test data in this report.
- EUT supports one configuration only in 802.11ax full RU mode, i.e. 242 tone in 11ax-HE20, 484 tone in 11ax-HE40, 996 tone in 11ax-HE80 and 2 x 996 tone in 11ax-HE160.

5.2. 26dB Bandwidth Measurement

5.2.1. Test Limit

N/A


5.2.2. Test Procedure Used

KDB 789033 D02v02r01 -Section C.1

5.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

5.2.4. Test Setup

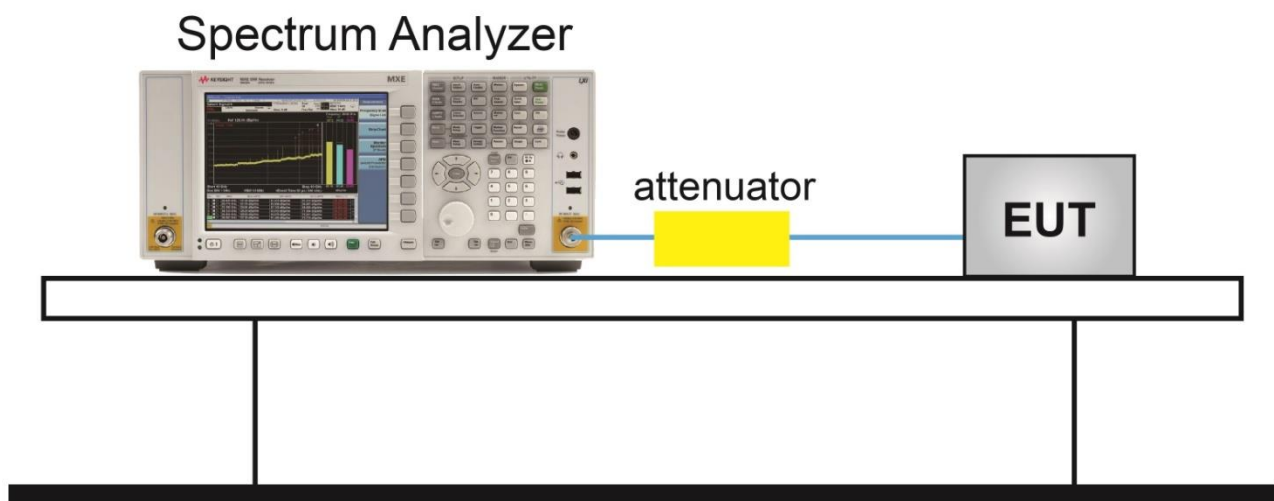

5.2.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/05/10		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)
802.11a	6Mbps	36	5180	21.12
802.11a	6Mbps	44	5220	20.99
802.11a	6Mbps	48	5240	21.02
802.11a	6Mbps	52	5260	21.09
802.11a	6Mbps	60	5300	20.89
802.11a	6Mbps	64	5320	20.99
802.11a	6Mbps	100	5500	21.13
802.11a	6Mbps	116	5580	21.17
802.11a	6Mbps	140	5700	20.91
802.11a	6Mbps	144	5720	21.05
802.11a	6Mbps	149	5745	20.90
802.11a	6Mbps	157	5785	21.48
802.11a	6Mbps	165	5825	20.99
802.11ac-VHT20	MCS0	36	5180	21.33
802.11ac-VHT20	MCS0	44	5220	21.35
802.11ac-VHT20	MCS0	48	5240	21.27
802.11ac-VHT20	MCS0	52	5260	21.28
802.11ac-VHT20	MCS0	60	5300	21.35
802.11ac-VHT20	MCS0	64	5320	21.24
802.11ac-VHT20	MCS0	100	5500	21.25
802.11ac-VHT20	MCS0	116	5580	21.29
802.11ac-VHT20	MCS0	140	5700	21.33
802.11ac-VHT20	MCS0	144	5720	21.28
802.11ac-VHT20	MCS0	149	5745	21.59
802.11ac-VHT20	MCS0	157	5785	21.65
802.11ac-VHT20	MCS0	165	5825	21.53

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)
802.11ac-VHT40	MCS0	38	5190	39.69
802.11ac-VHT40	MCS0	46	5230	39.86
802.11ac-VHT40	MCS0	54	5270	39.67
802.11ac-VHT40	MCS0	62	5310	39.60
802.11ac-VHT40	MCS0	102	5510	39.44
802.11ac-VHT40	MCS0	110	5550	39.71
802.11ac-VHT40	MCS0	134	5670	39.55
802.11ac-VHT40	MCS0	142	5710	39.23
802.11ac-VHT40	MCS0	151	5755	72.01
802.11ac-VHT40	MCS0	159	5795	74.84
802.11ac-VHT80	MCS0	42	5210	80.75
802.11ac-VHT80	MCS0	58	5290	80.70
802.11ac-VHT80	MCS0	106	5530	80.72
802.11ac-VHT80	MCS0	122	5610	80.51
802.11ac-VHT80	MCS0	138	5690	80.94
802.11ac-VHT80	MCS0	155	5775	80.54
802.11ac-VHT160	MCS0	50	5250	161.80
802.11ac-VHT160	MCS0	114	5570	162.80


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)
802.11ax-HE20	MCS0	36	5180	21.40
802.11ax-HE20	MCS0	44	5220	21.42
802.11ax-HE20	MCS0	48	5240	21.36
802.11ax-HE20	MCS0	52	5260	21.42
802.11ax-HE20	MCS0	60	5300	21.46
802.11ax-HE20	MCS0	64	5320	21.53
802.11ax-HE20	MCS0	100	5500	21.45
802.11ax-HE20	MCS0	116	5580	21.36
802.11ax-HE20	MCS0	140	5700	21.56
802.11ax-HE20	MCS0	144	5720	21.55
802.11ax-HE20	MCS0	149	5745	32.98
802.11ax-HE20	MCS0	157	5785	40.00
802.11ax-HE20	MCS0	165	5825	40.00
802.11ax-HE40	MCS0	38	5190	39.73
802.11ax-HE40	MCS0	46	5230	39.72
802.11ax-HE40	MCS0	54	5270	39.51
802.11ax-HE40	MCS0	62	5310	39.51
802.11ax-HE40	MCS0	102	5510	39.88
802.11ax-HE40	MCS0	110	5550	39.88
802.11ax-HE40	MCS0	134	5670	39.44
802.11ax-HE40	MCS0	142	5710	39.33
802.11ax-HE40	MCS0	151	5755	44.21
802.11ax-HE40	MCS0	159	5795	67.94
802.11ax-HE80	MCS0	42	5210	81.10
802.11ax-HE80	MCS0	58	5290	81.16
802.11ax-HE80	MCS0	106	5530	80.88
802.11ax-HE80	MCS0	122	5610	81.27
802.11ax-HE80	MCS0	138	5690	81.36
802.11ax-HE80	MCS0	155	5775	80.77
802.11ax-HE160	MCS0	50	5250	164.0
802.11ax-HE160	MCS0	114	5570	163.6

802.11a 26dB Bandwidth


Channel 36 (5180MHz)

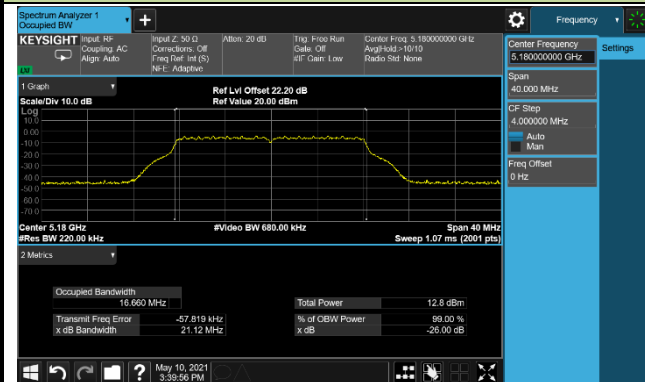


Channel 44 (5220MHz)

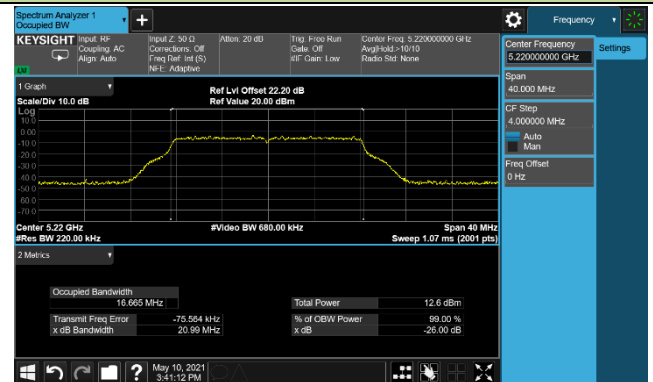


Channel 48 (5240MHz)

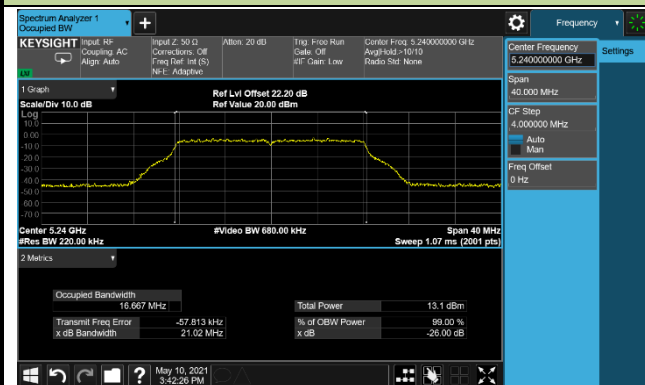


Channel 52 (5260MHz)

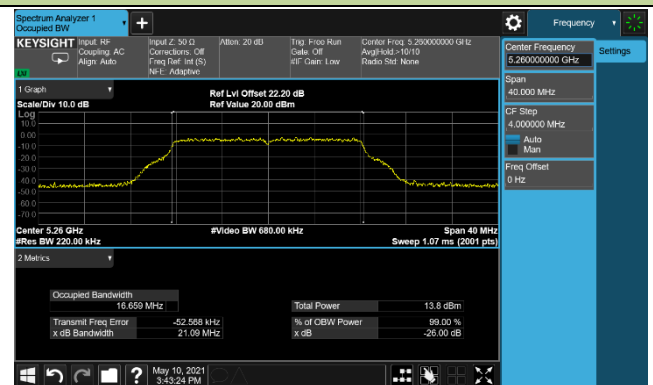


Channel 60 (5300MHz)

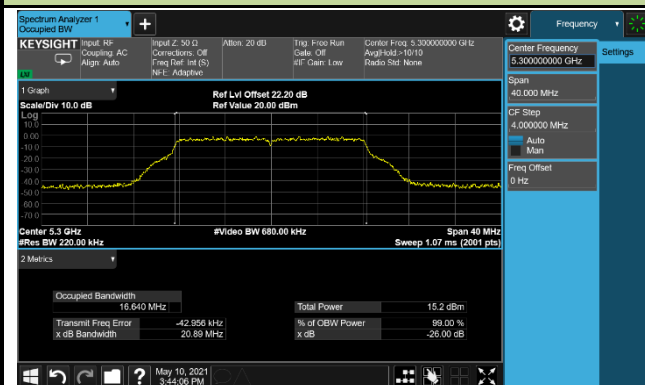


Channel 64 (5320MHz)

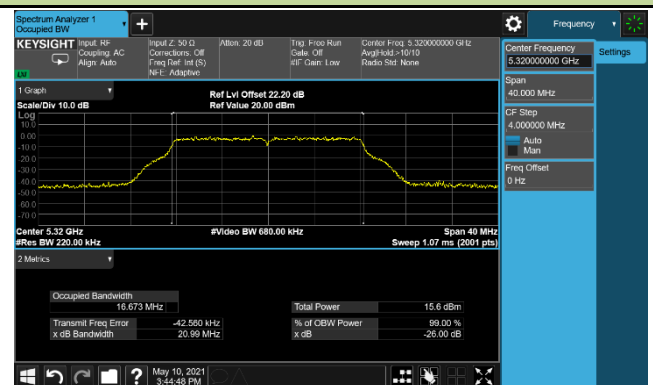

Channel 100 (5500MHz)

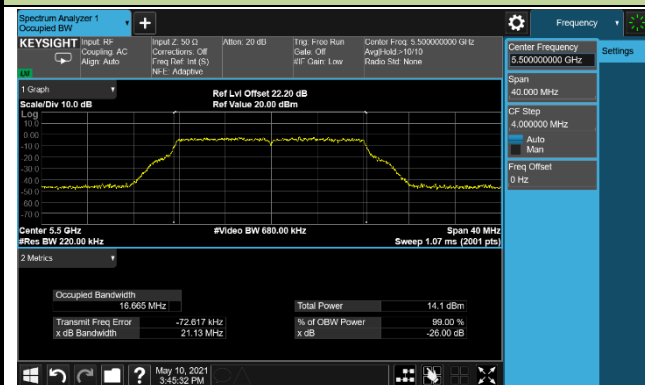


Channel 116 (5580MHz)

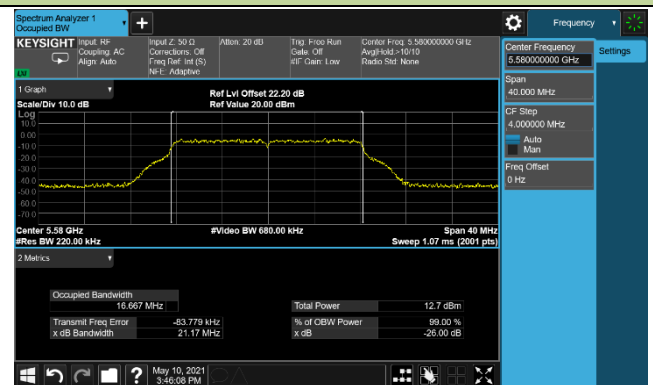


802.11a 26dB Bandwidth


Channel 140 (5700MHz)

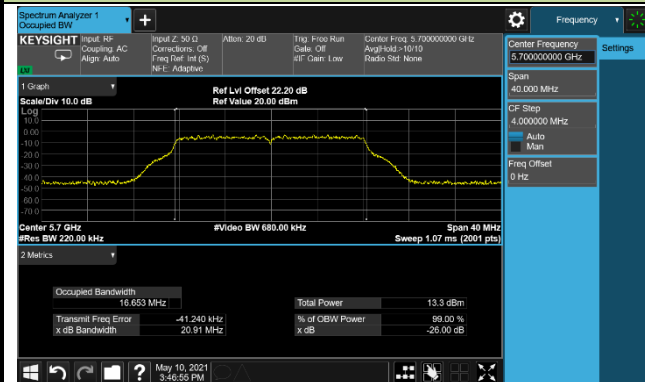


Channel 144 (5720MHz)

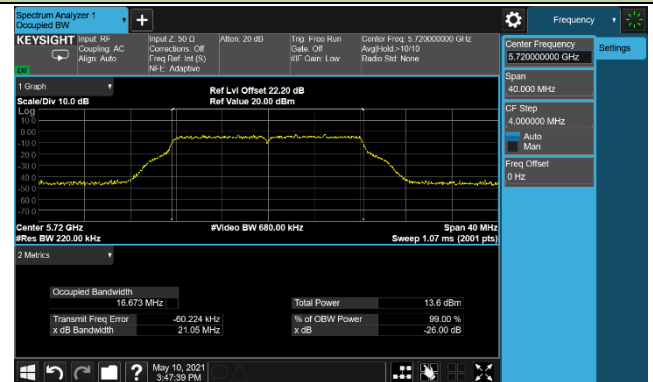


Channel 149 (5745MHz)

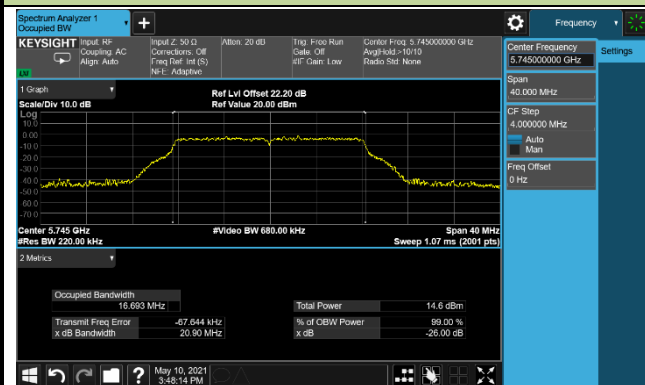

Channel 157 (5785MHz)

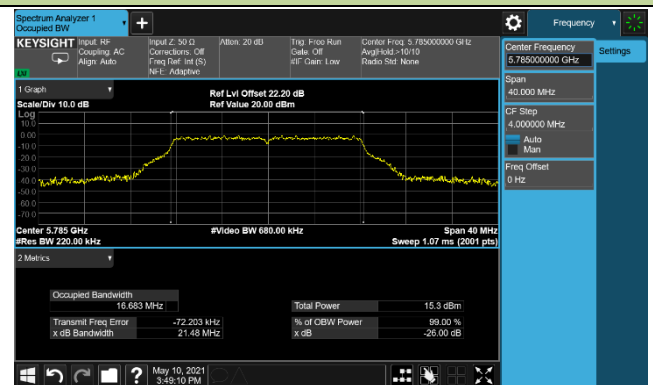


Channel 165 (5825MHz)

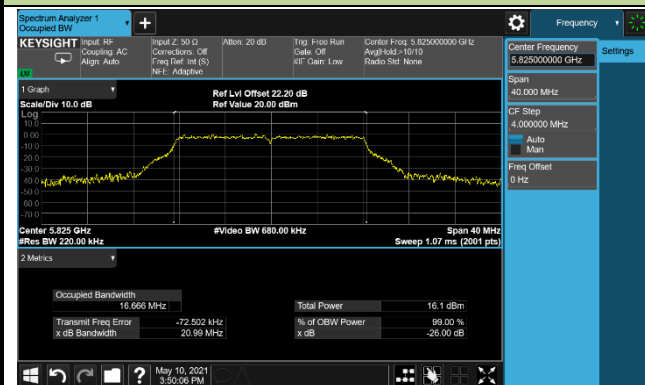


802.11ac-VHT20 26dB Bandwidth


Channel 36 (5180MHz)

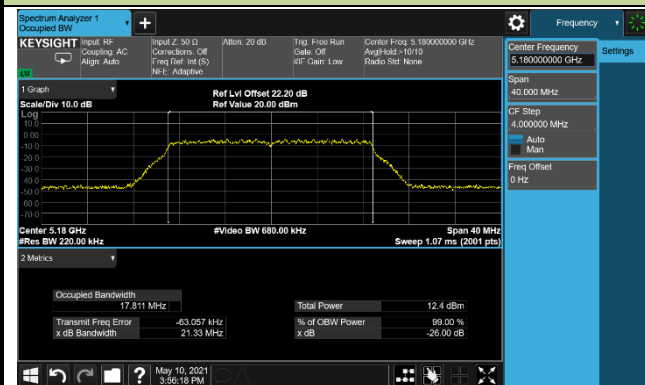


Channel 44 (5220MHz)

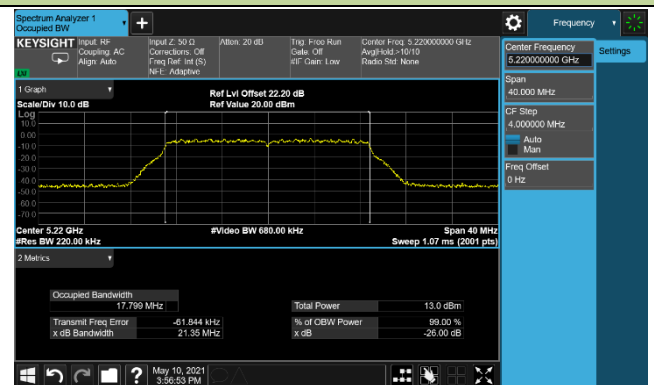


Channel 48 (5240MHz)

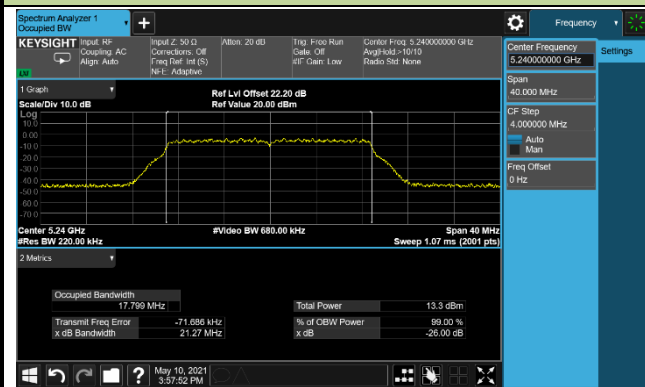


Channel 52 (5260MHz)

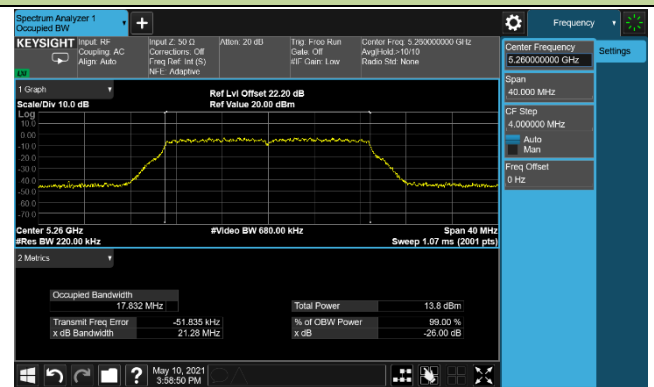


Channel 60 (5300MHz)

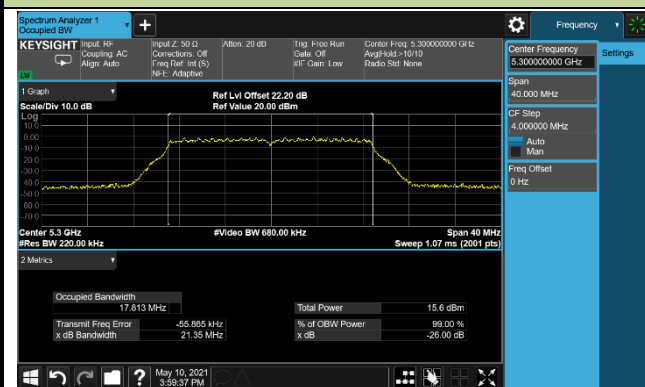


Channel 64 (5320MHz)

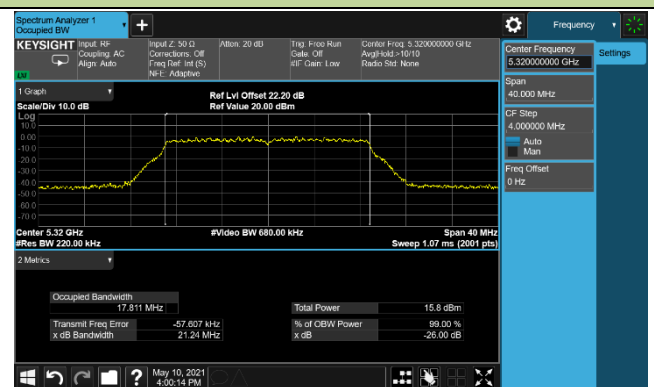

Channel 100 (5500MHz)

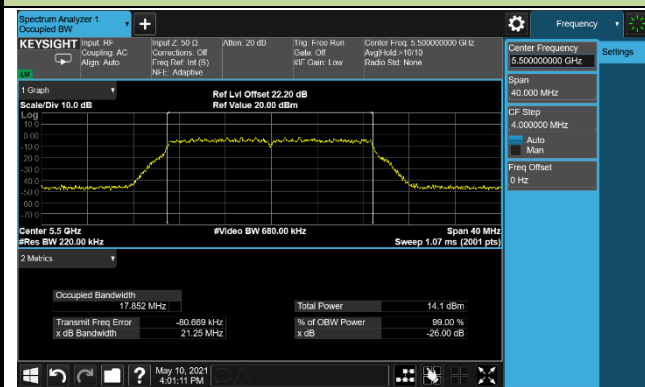


Channel 116 (5580MHz)

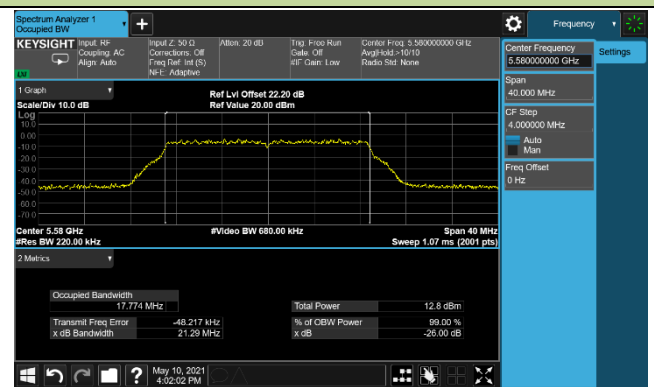


802.11ac-VHT20 26dB Bandwidth


Channel 140 (5700MHz)

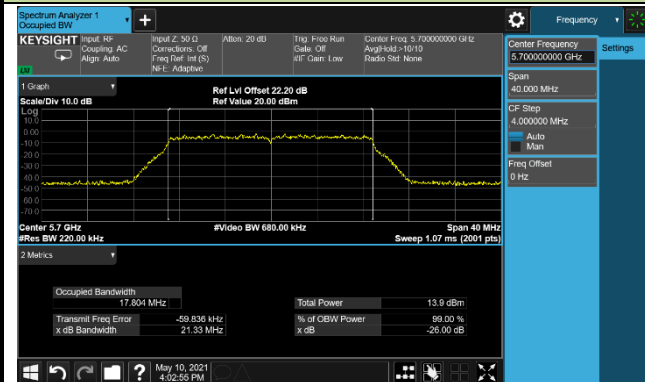


Channel 144 (5720MHz)

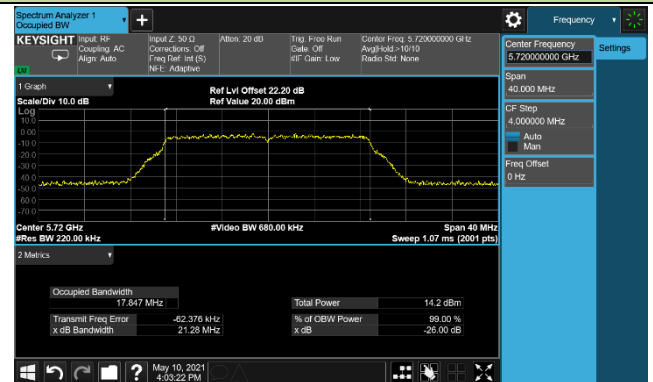


Channel 149 (5745MHz)

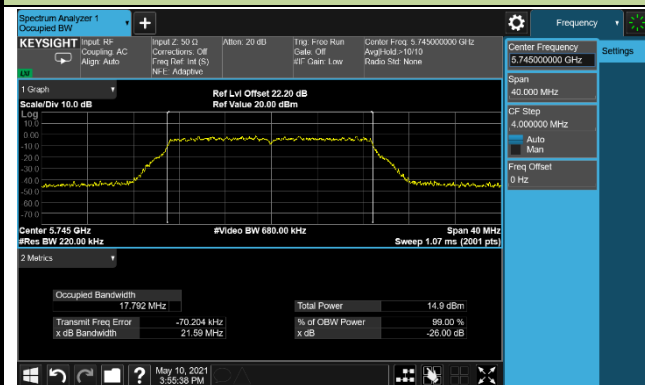

Channel 157 (5785MHz)

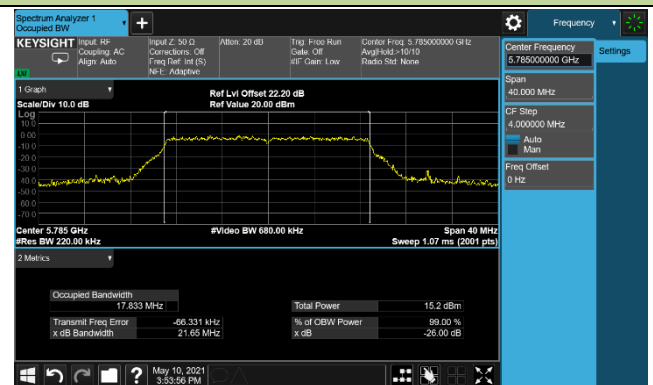


Channel 165 (5825MHz)

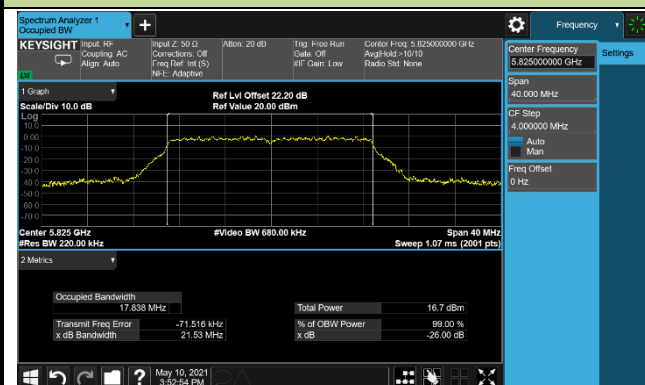


802.11ac-VHT40 26dB Bandwidth


Channel 38 (5190MHz)

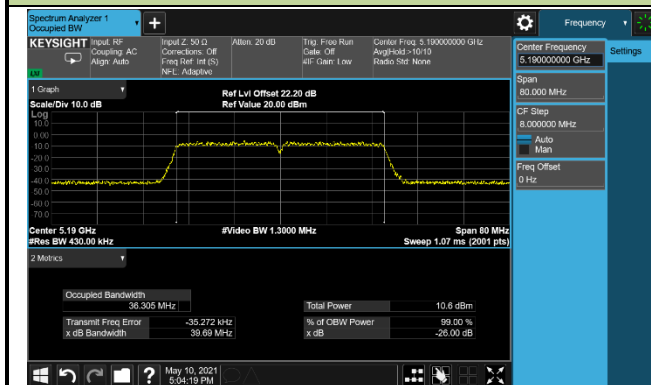


Channel 46 (5230MHz)

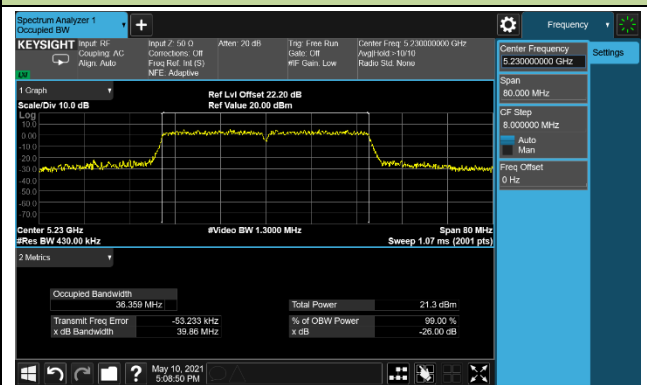


Channel 54 (5270MHz)

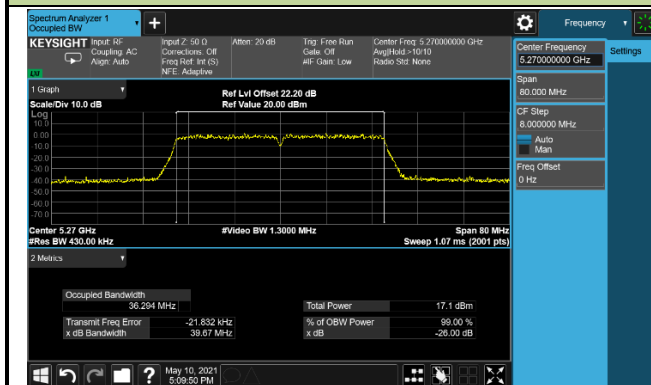


Channel 62 (5310MHz)

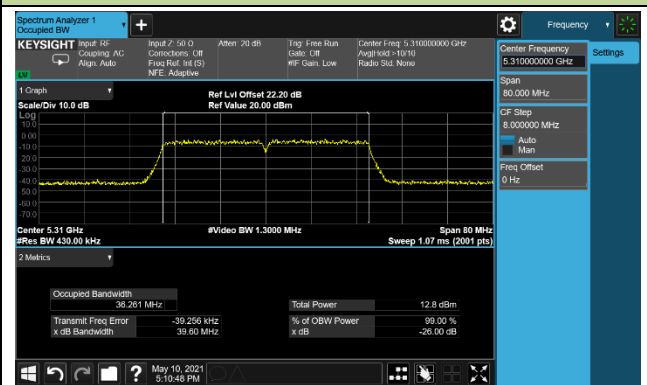

Channel 102 (5510MHz)

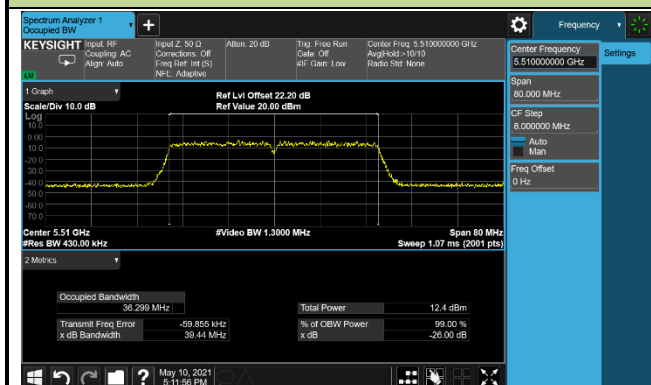


Channel 110 (5550MHz)

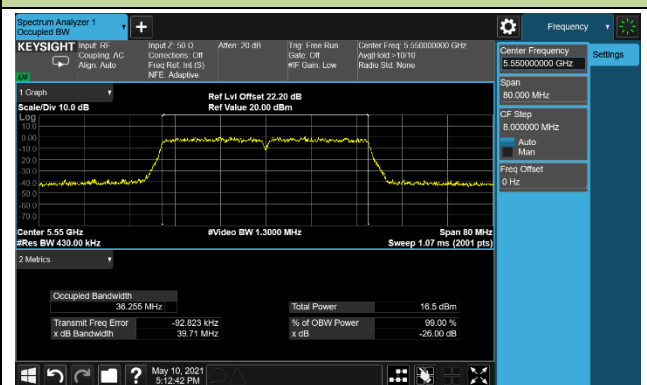


802.11ac-VHT40 26dB Bandwidth


Channel 134 (5670MHz)

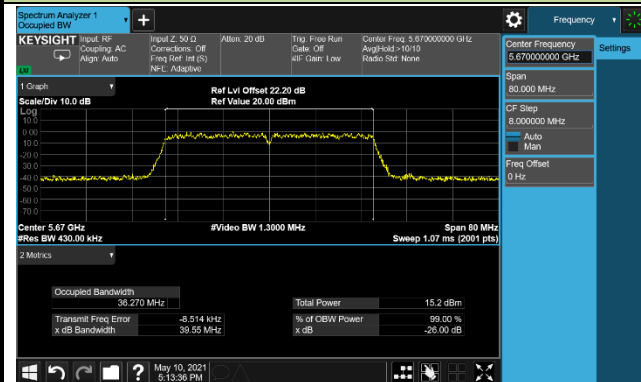


Channel 142 (5710MHz)

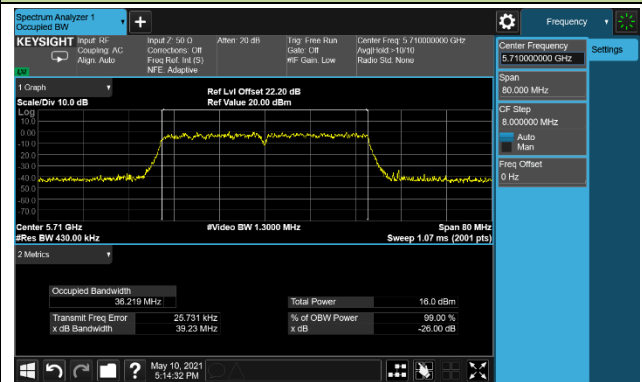

Channel 151 (5755MHz)

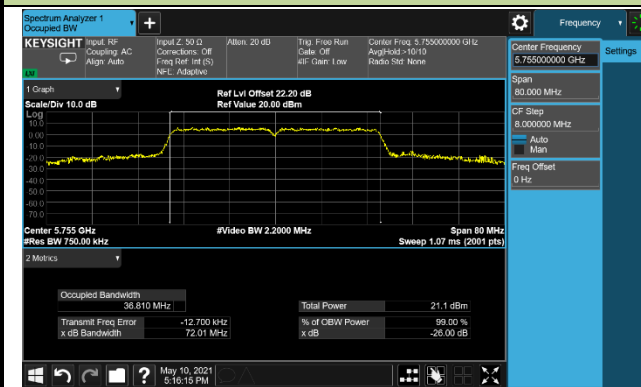


Channel 159 (5795MHz)

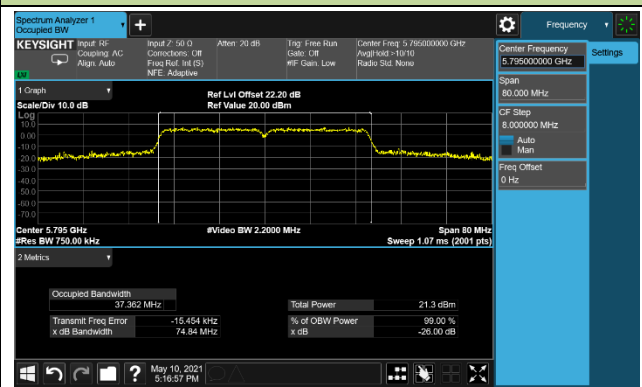


802.11ac-VHT80 26dB Bandwidth


Channel 42 (5210MHz)

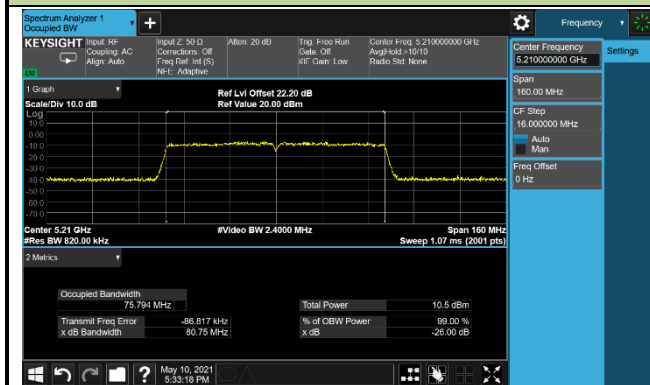


Channel 58 (5290MHz)

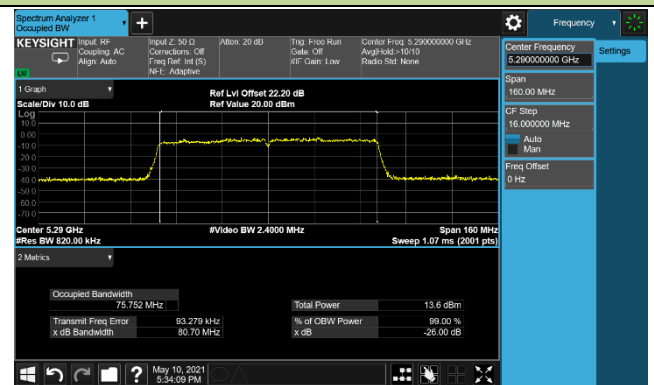


Channel 106 (5530MHz)

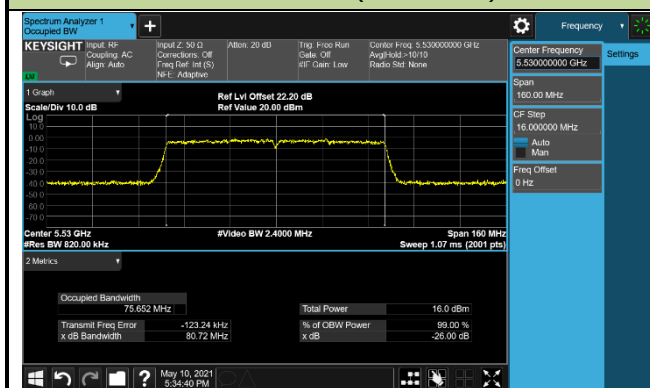


Channel 122 (5610MHz)

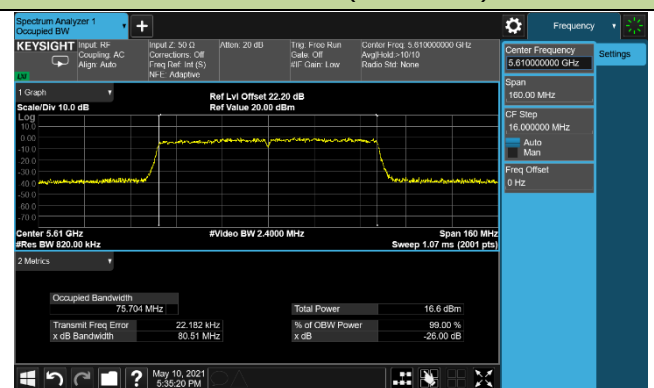

Channel 138 (5690MHz)

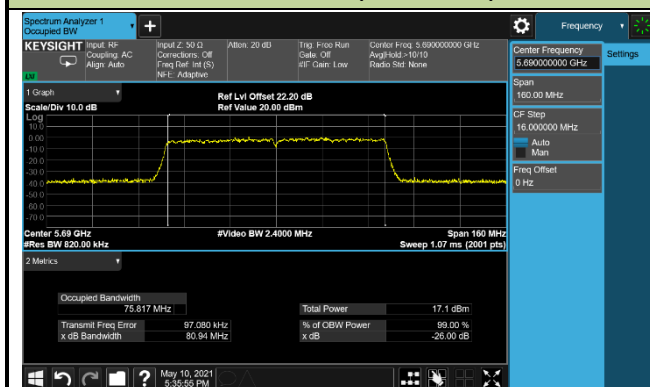


Channel 155 (5775MHz)

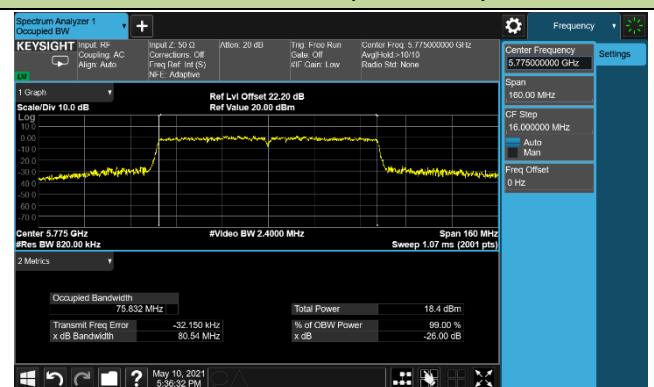


802.11ac-VHT160 26dB Bandwidth

Channel 50 (5250MHz)

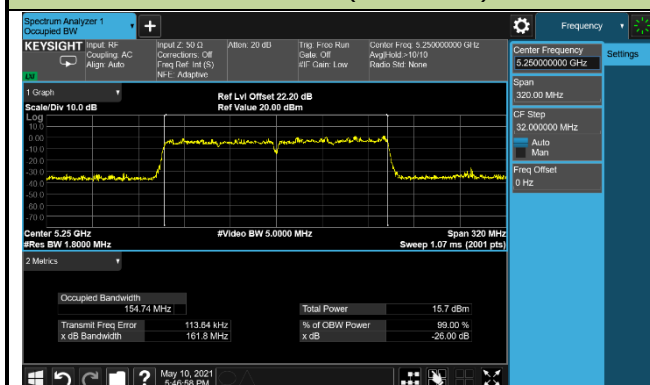


Channel 114 (5570MHz)

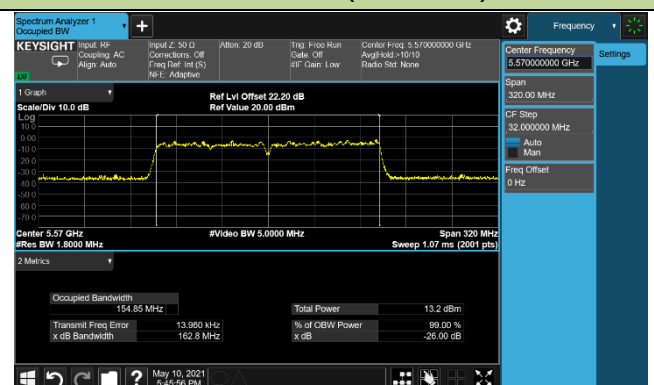


802.11ax-HE20 26dB Bandwidth


Channel 36 (5180MHz)

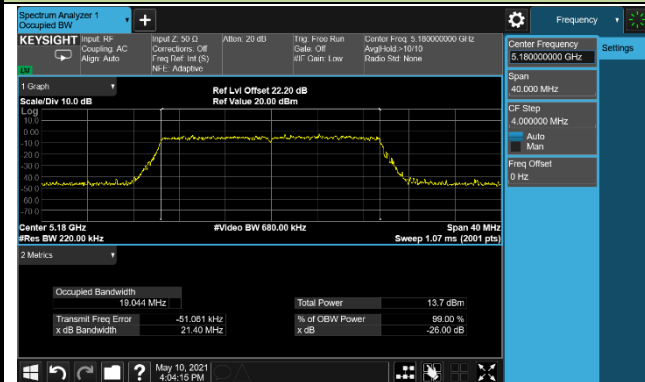


Channel 44 (5220MHz)

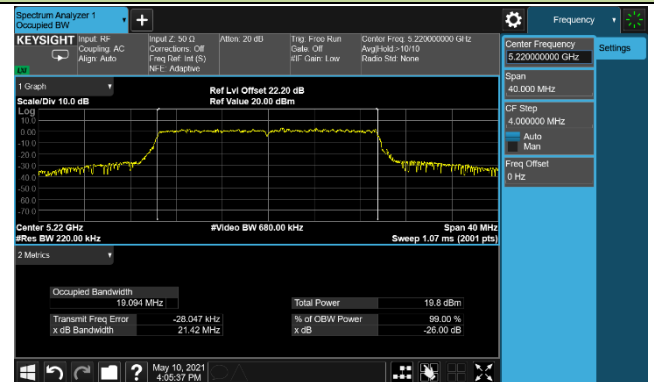


Channel 48 (5240MHz)

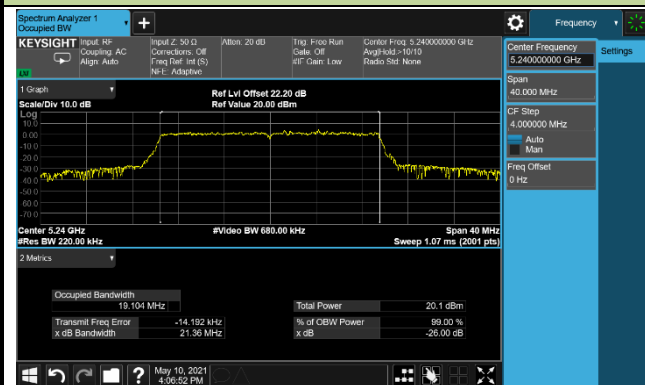


Channel 52 (5260MHz)

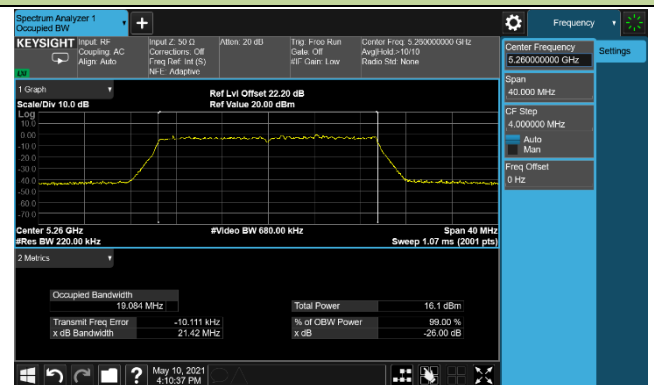


Channel 60 (5300MHz)

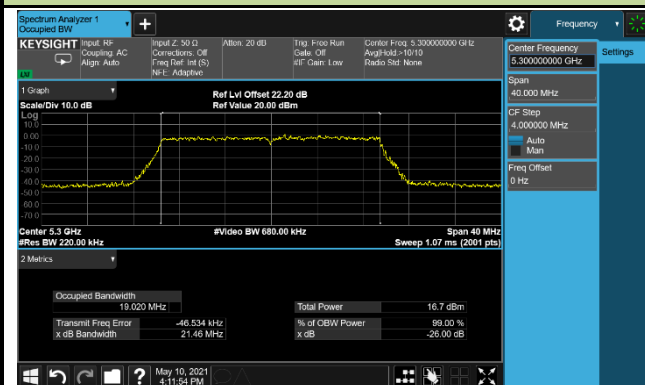


Channel 64 (5320MHz)

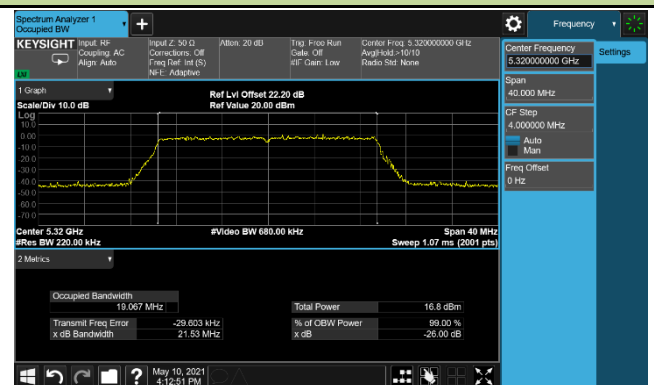

Channel 100 (5500MHz)

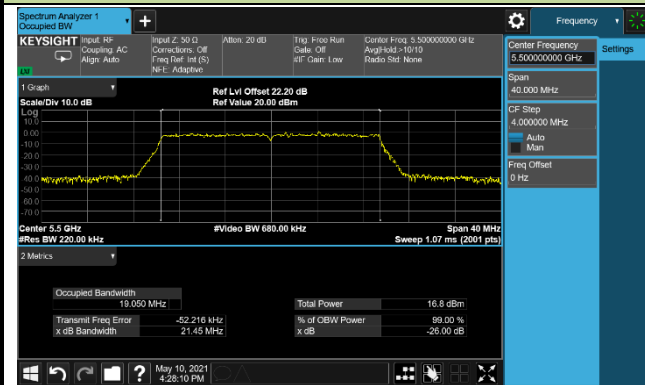


Channel 116 (5580MHz)

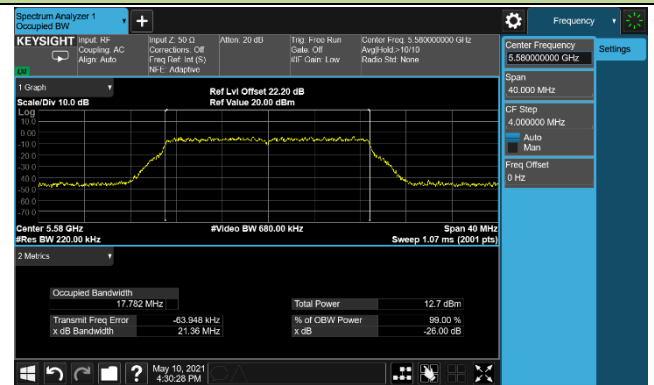


802.11ax-HE20 26dB Bandwidth


Channel 140 (5700MHz)

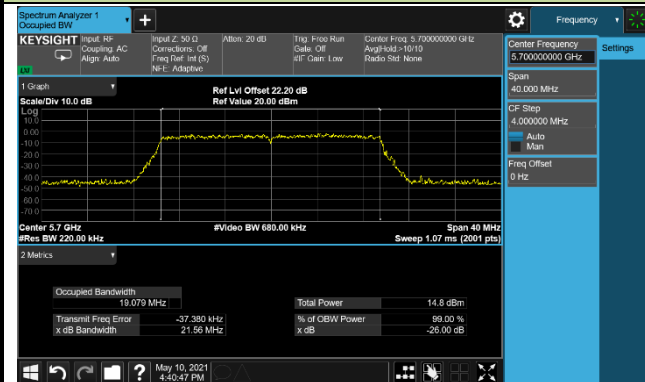


Channel 144 (5720MHz)

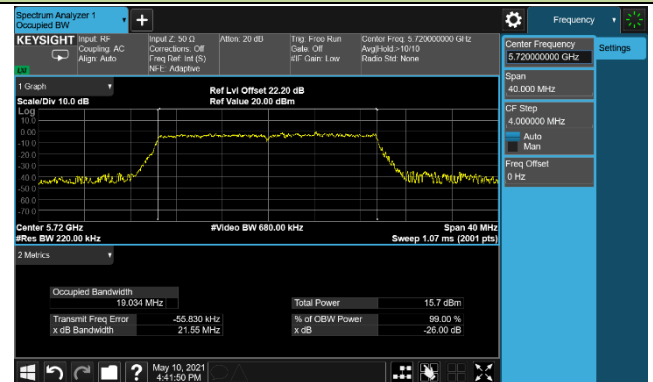


Channel 149 (5745MHz)

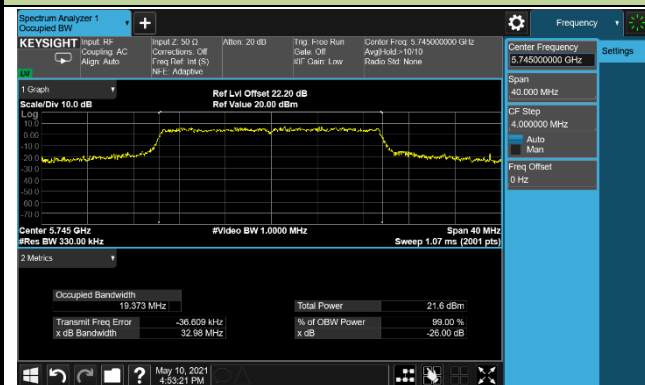

Channel 157 (5785MHz)

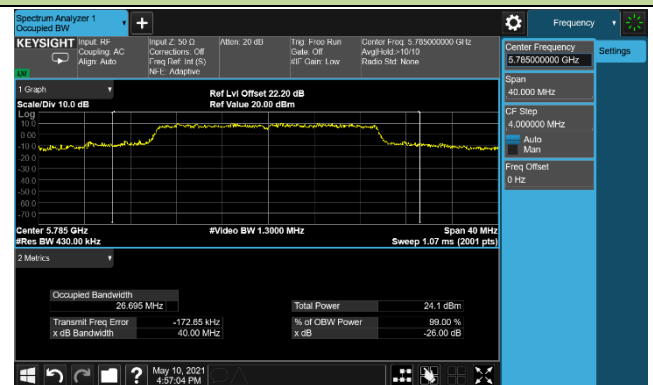


Channel 165 (5825MHz)

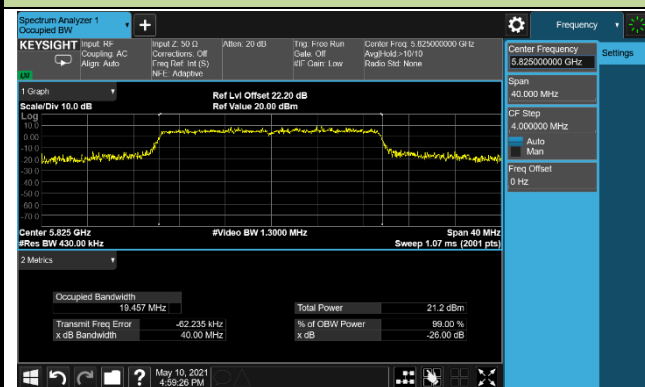


802.11ax-HE40 26dB Bandwidth


Channel 38 (5190MHz)

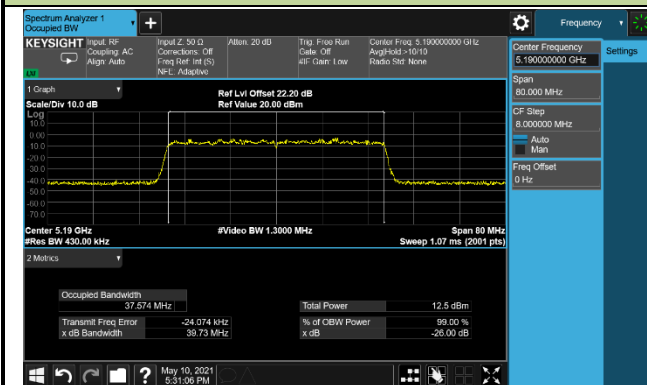


Channel 46 (5230MHz)

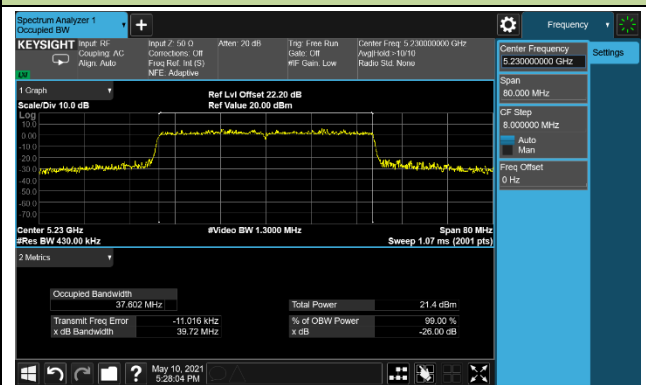


Channel 54 (5270MHz)

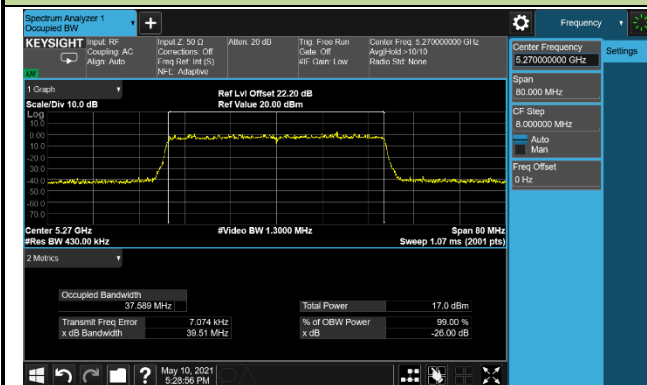


Channel 62 (5310MHz)

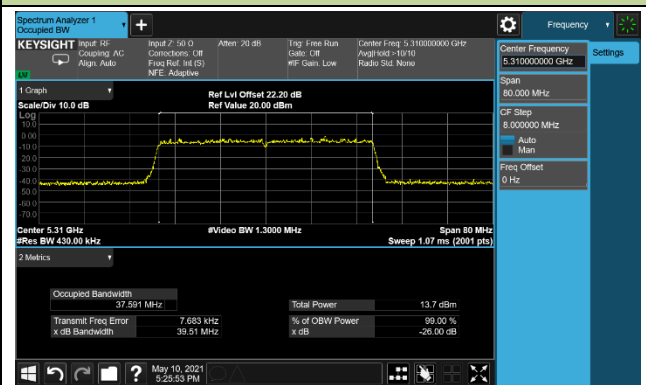

Channel 102 (5510MHz)

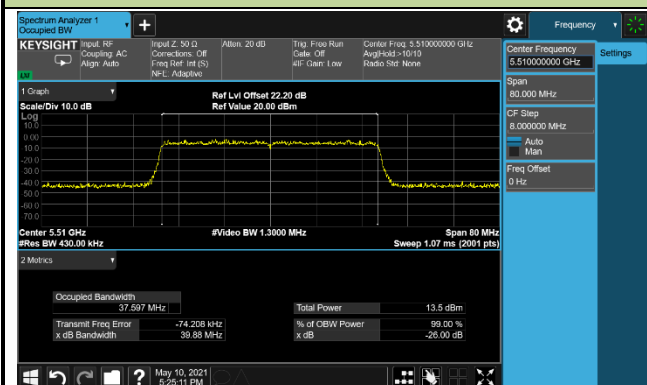


Channel 110 (5550MHz)

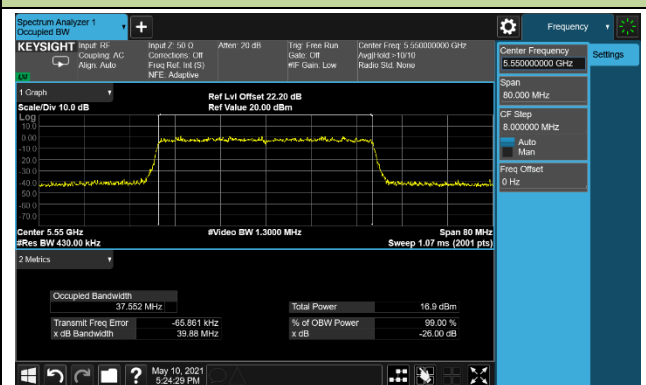


802.11ax-HE40 26dB Bandwidth


Channel 134 (5670MHz)

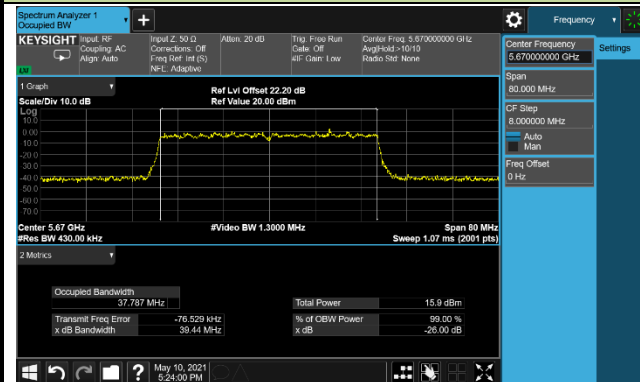

Channel 142 (5710MHz)

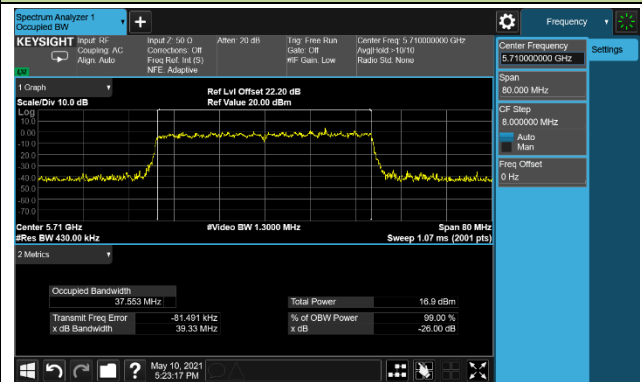

Channel 151 (5755MHz)

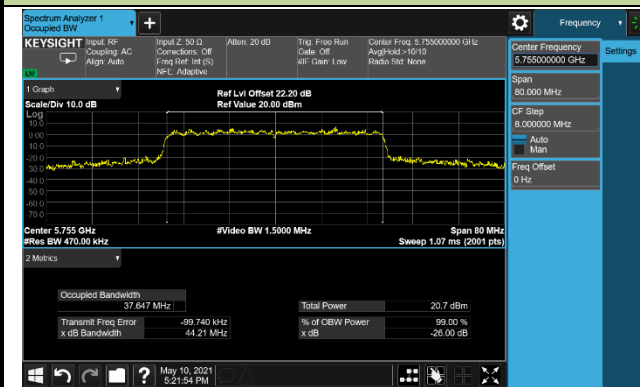

Channel 159 (5795MHz)

