





802.11ax-HE40 Power Spectral Density - Ant 1 / Ant 0 + 1


Channel 38 (5190MHz)

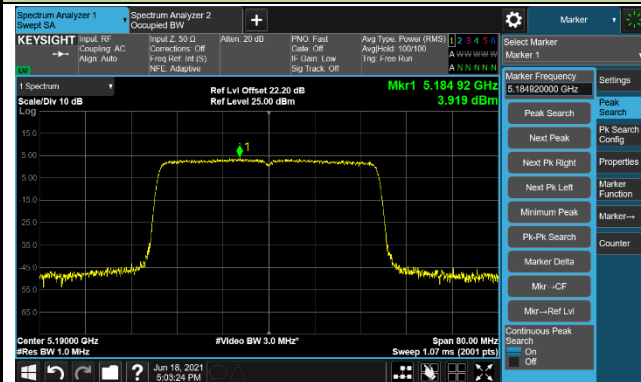


Channel 46 (5230MHz)

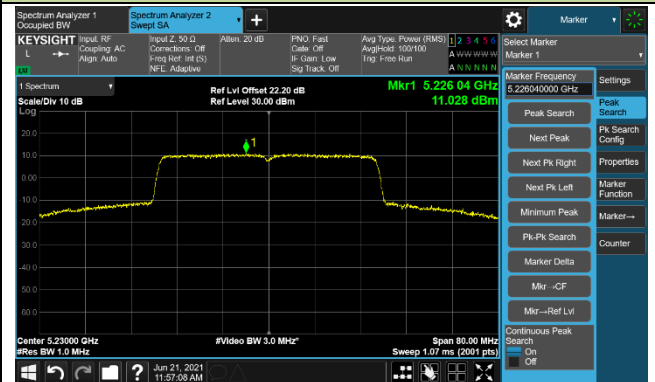


Channel 54 (5270MHz)

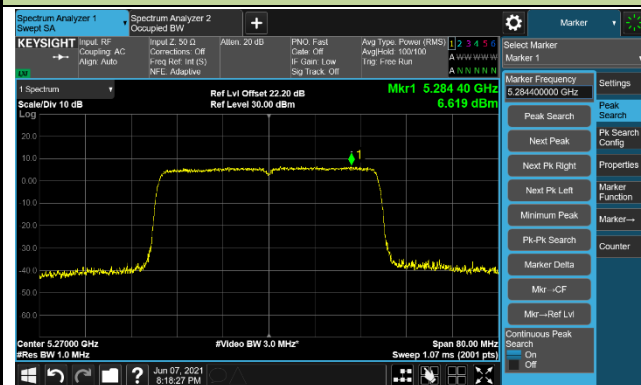


Channel 62 (5310MHz)

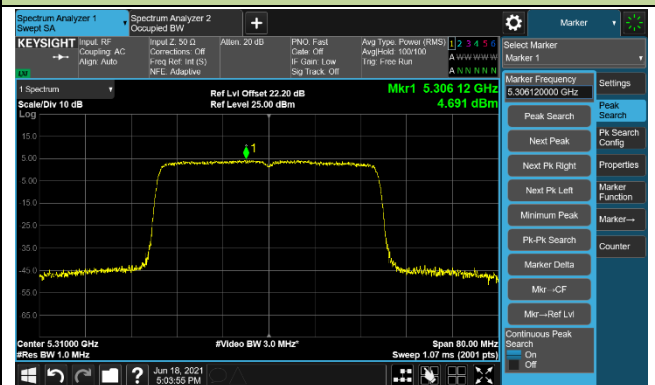


Channel 102 (5510MHz)

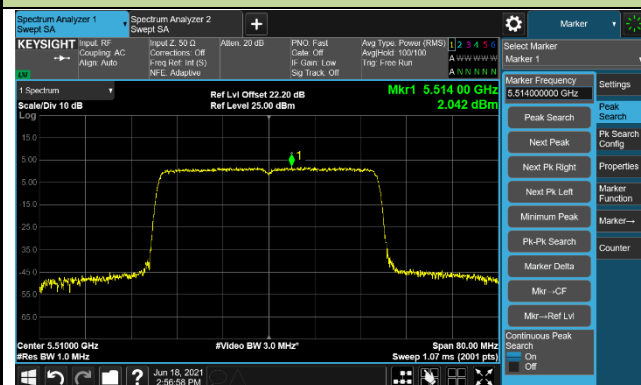


Channel 110 (5550MHz)

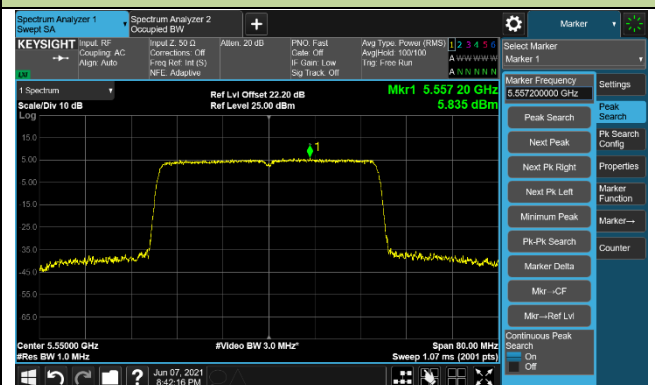

Channel 134 (5670MHz)

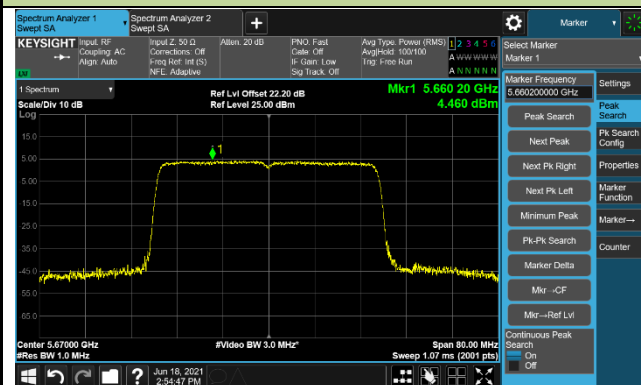


Channel 142 (5710MHz)

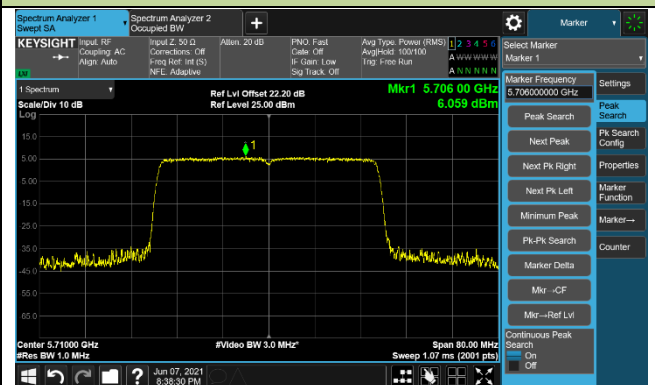




802.11ax-HE80 Power Spectral Density - Ant 1 / Ant 0 + 1


Channel 42 (5210MHz)

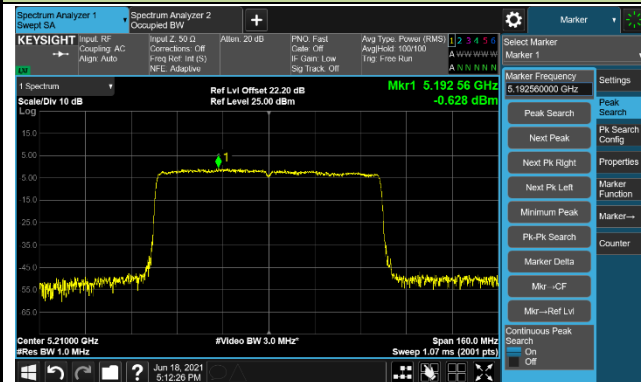


Channel 58 (5290MHz)

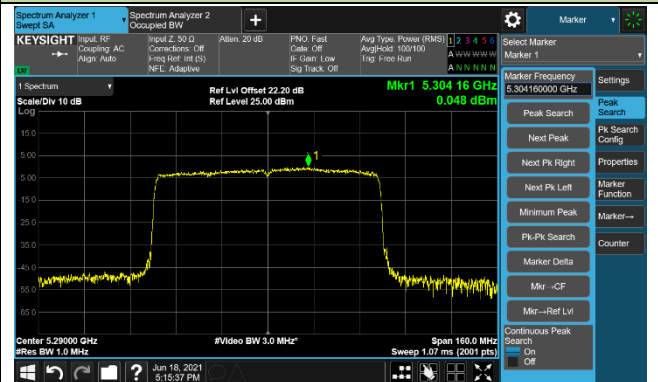


Channel 106 (5530MHz)

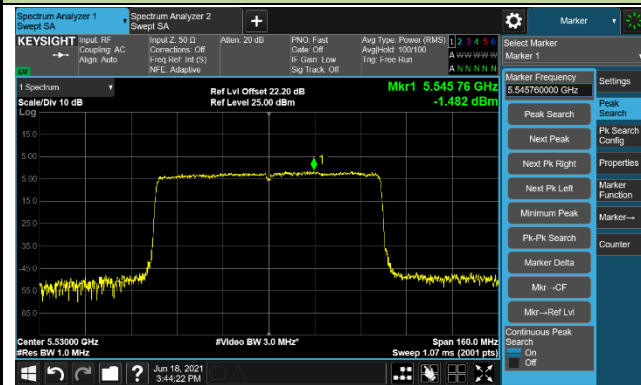

Channel 122 (5610MHz)

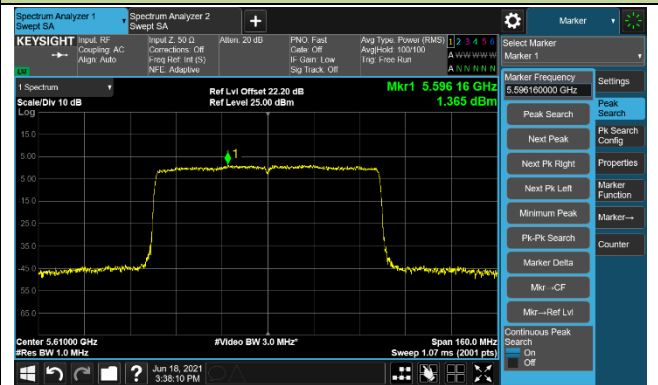

Channel 138 (5690MHz)

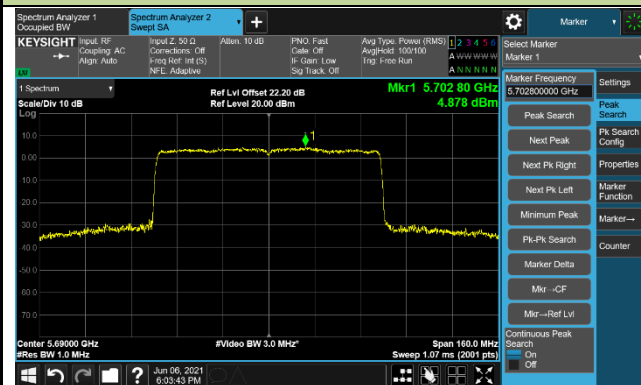


Channel 155 (5775MHz)




802.11ax-HE160 Power Spectral Density - Ant 1 / Ant 0 + 1

Channel 50 (5250MHz)

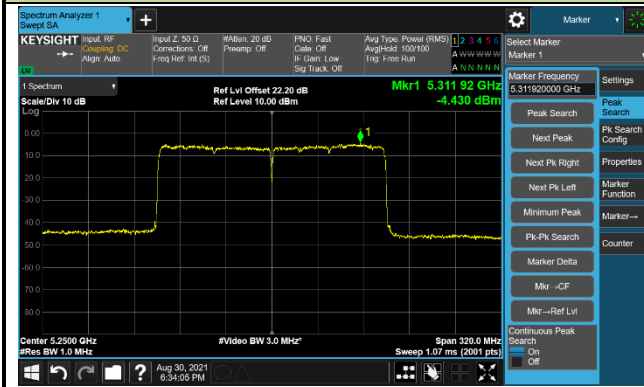

Channel 114 (5570MHz)

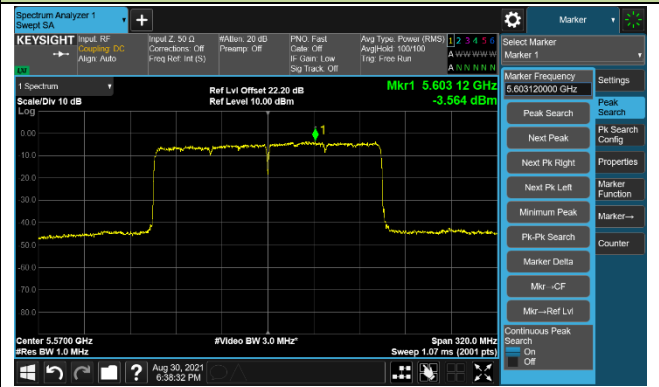

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3.Test Setup

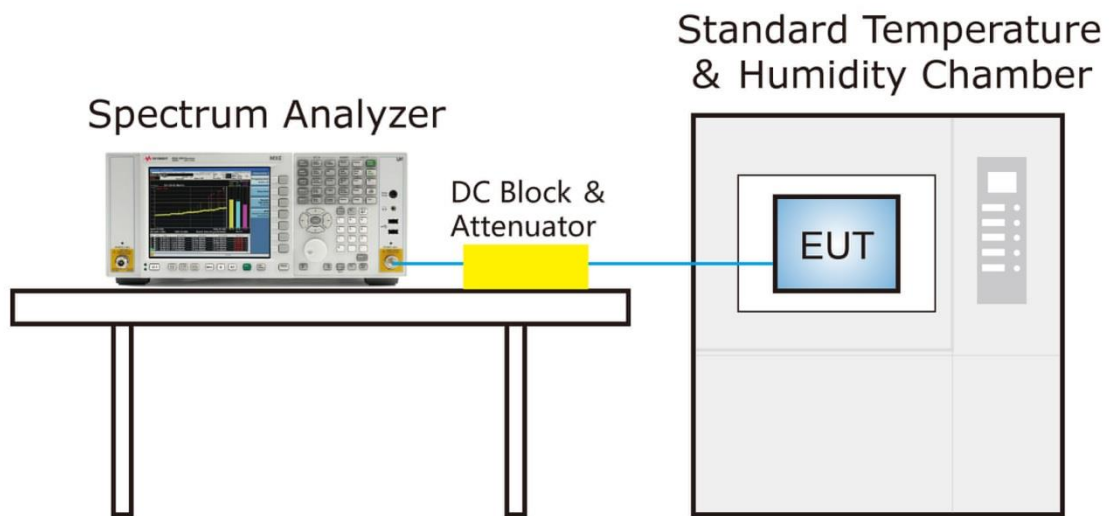

7.7.4.Test Result

Product	AX5400 Tri-Band Wi-Fi 6 Router	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2021/07/16
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	-10.96	-11.26	-11.55	-11.61
		- 20	-11.08	-11.26	-11.55	-11.61
		- 10	-11.10	-11.27	-11.56	-11.63
		0	-11.13	-11.28	-11.56	-11.63
		+ 10	-11.15	-11.32	-11.57	-11.63
		+ 20 (Ref)	-11.17	-11.38	-11.58	-11.64
		+ 30	-11.18	-11.39	-11.59	-11.64
		+ 40	-11.20	-11.51	-11.59	-11.65
		+ 50	-11.22	-11.52	-11.60	-11.64
115%	138	+ 20	-11.23	-11.53	-11.60	-11.65
85%	102	+ 20	-11.24	-11.53	-11.61	-11.66

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

7.8. Radiated Spurious Emission Measurement

7.8.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3.Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4.Test Setup

Below 1GHz Test Setup:

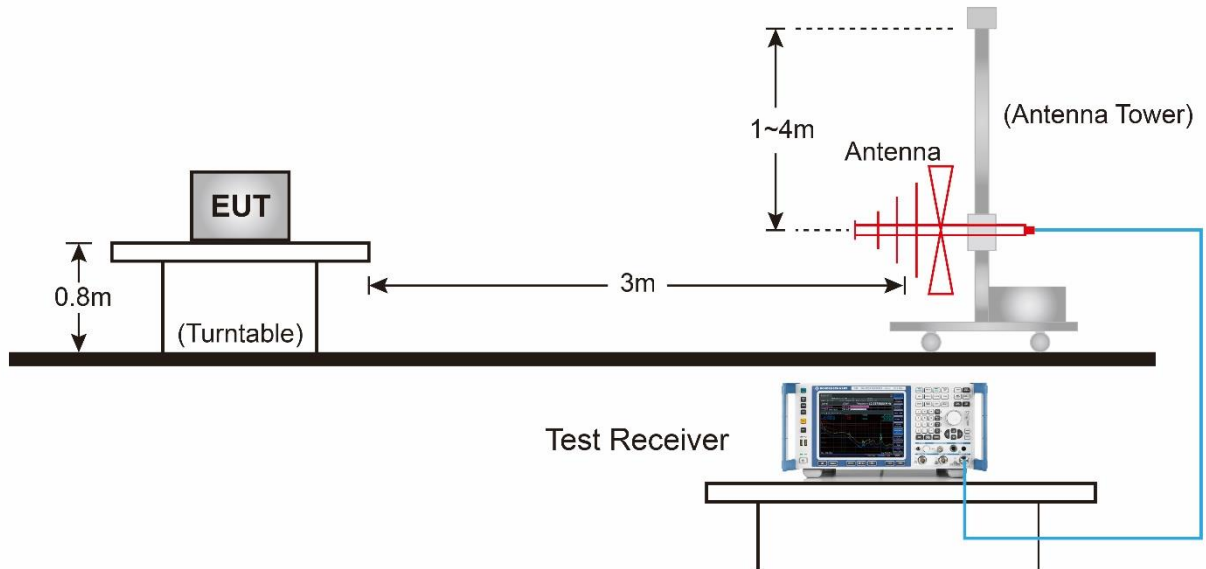


Above 1GHz Test Setup:

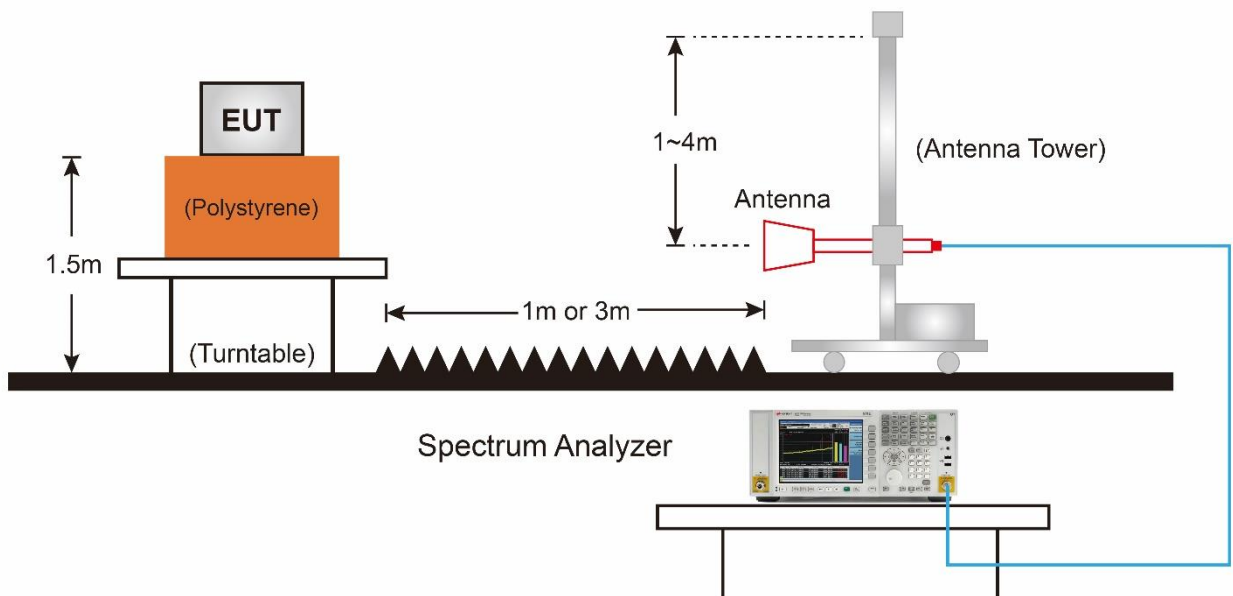

7.8.5.Test Result

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

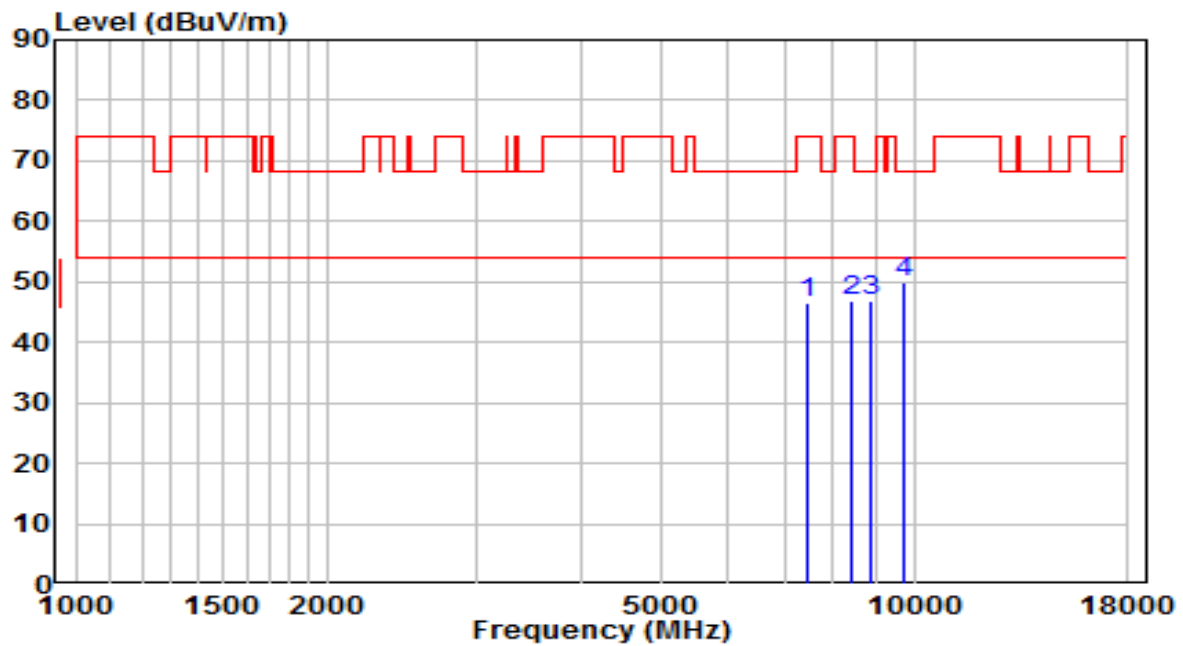


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7451.500	33.70	12.80	46.50	-27.50	74.00	Peak
2	8403.500	33.21	13.61	46.82	-27.18	74.00	Peak
3	8854.000	32.37	14.52	46.89	-21.31	68.20	Peak
4	* 9721.000	33.80	16.09	49.89	-18.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

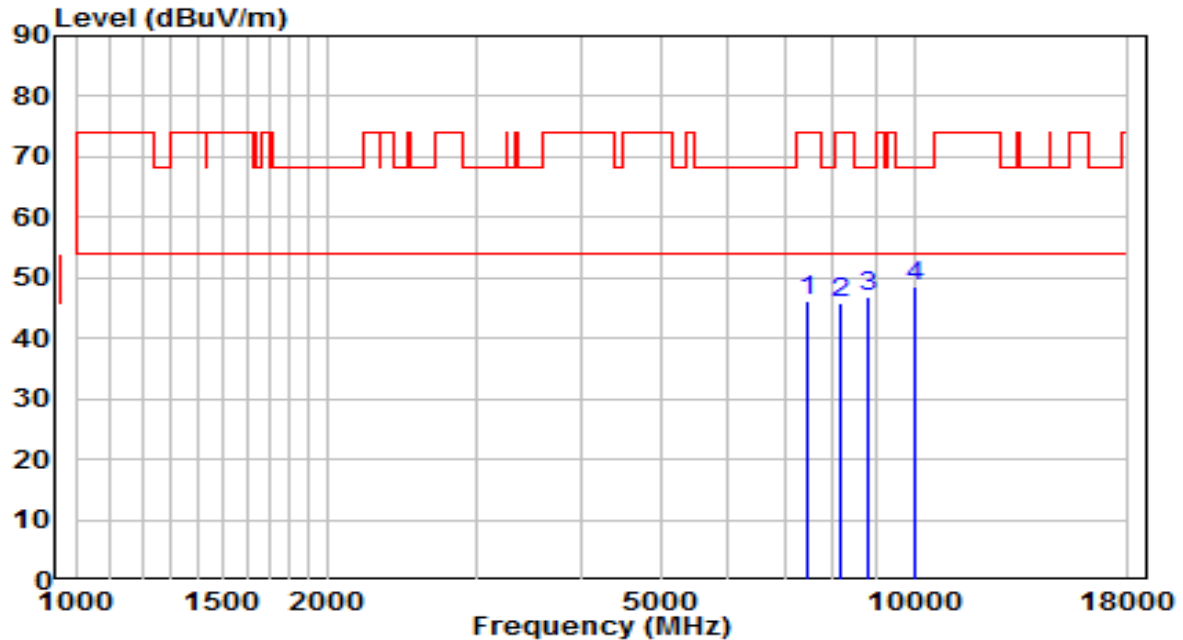


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7468.500	33.46	12.88	46.33	-27.67	74.00	Peak
2	8191.000	32.21	13.52	45.73	-28.27	74.00	Peak
3	8820.000	32.36	14.44	46.80	-21.40	68.20	Peak
4	* 10035.500	31.90	16.70	48.60	-19.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

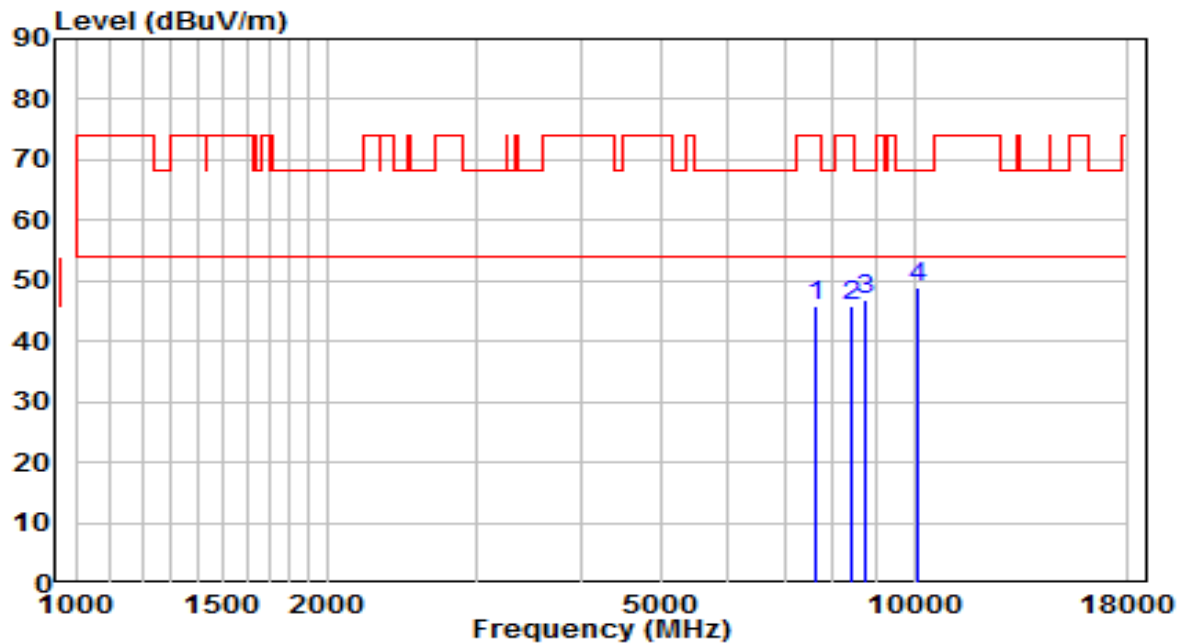


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7604.500	32.73	13.10	45.83	-28.17	74.00	Peak
2	8412.000	32.22	13.62	45.83	-28.17	74.00	Peak
3	8760.500	32.55	14.29	46.85	-21.35	68.20	Peak
4	* 10129.000	31.80	17.08	48.88	-19.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

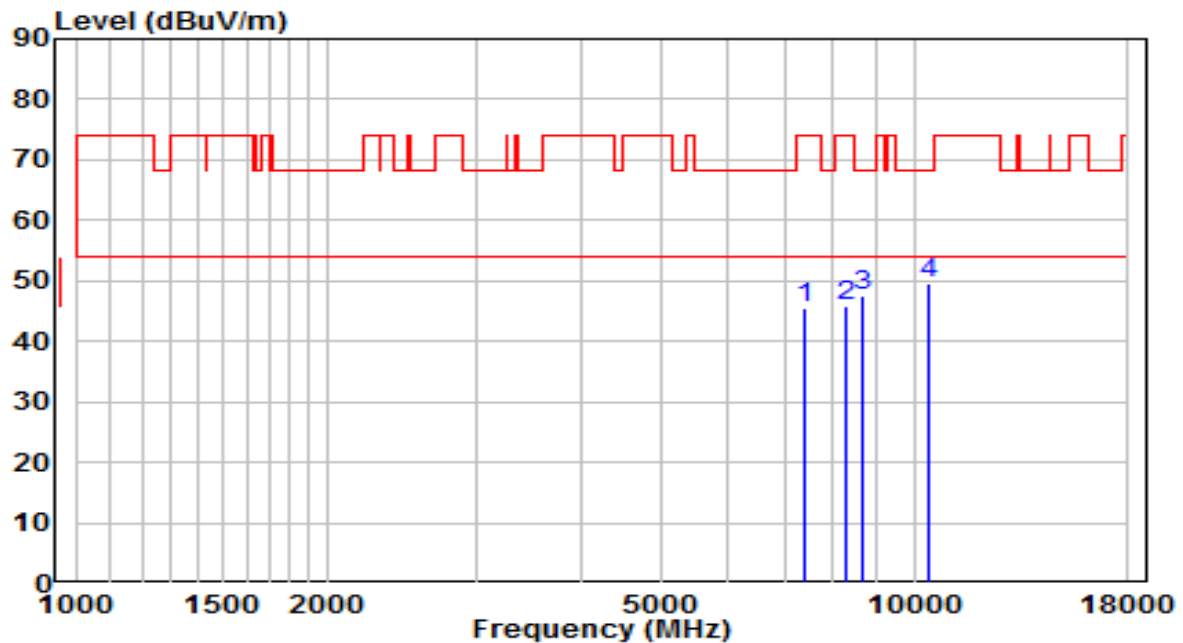


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7409.000	32.86	12.61	45.47	-28.53	74.00	Peak
2	8293.000	32.12	13.56	45.69	-28.31	74.00	Peak
3	8709.500	33.37	14.17	47.53	-20.67	68.20	Peak
4	* 10443.500	31.33	18.34	49.68	-18.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

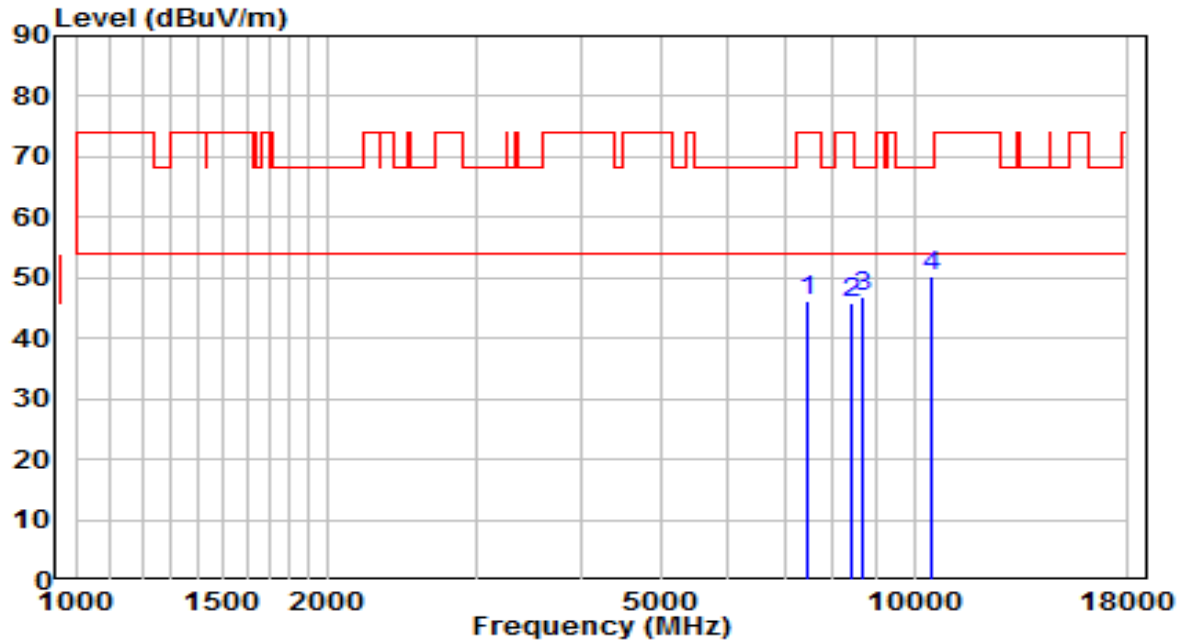


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	33.49	12.84	46.33	-27.67	74.00	Peak
2	8429.000	32.33	13.62	45.95	-28.05	74.00	Peak
3	8684.000	32.71	14.11	46.82	-21.38	68.20	Peak
4	* 10503.000	31.53	18.57	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

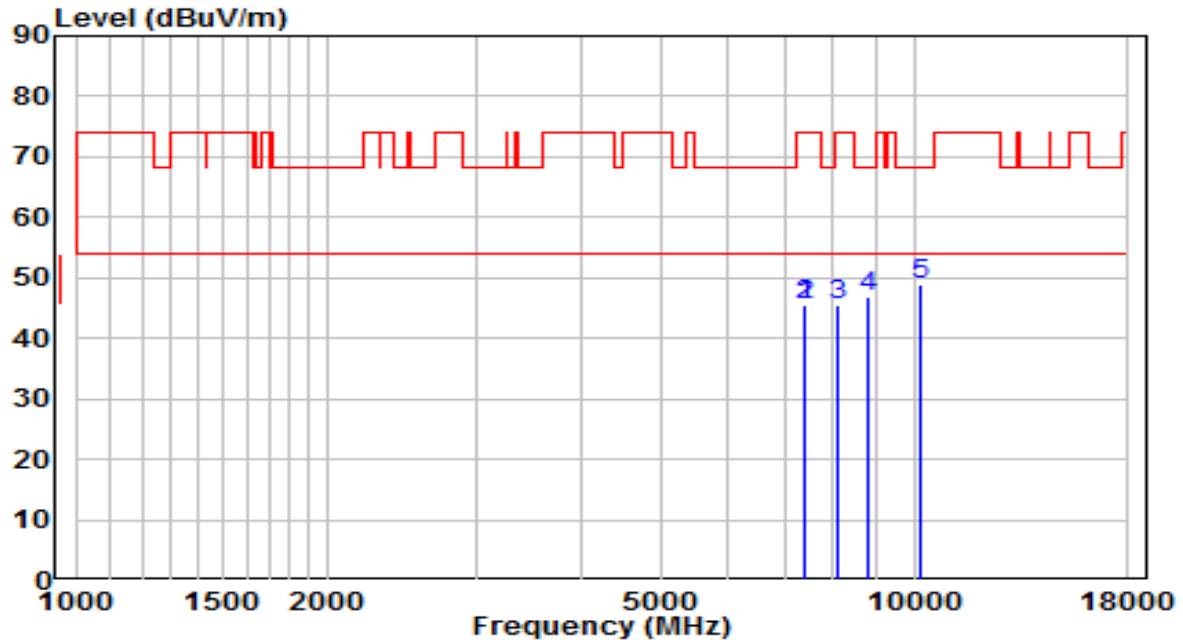


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	32.84	12.61	45.45	-28.55	74.00	Peak
2	7409.000	32.84	12.61	45.45	-28.55	74.00	Peak
3	8106.000	32.03	13.48	45.50	-28.50	74.00	Peak
4	8820.000	32.29	14.44	46.73	-21.47	68.20	Peak
5	* 10205.500	31.56	17.39	48.95	-19.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	AC 120V/60Hz

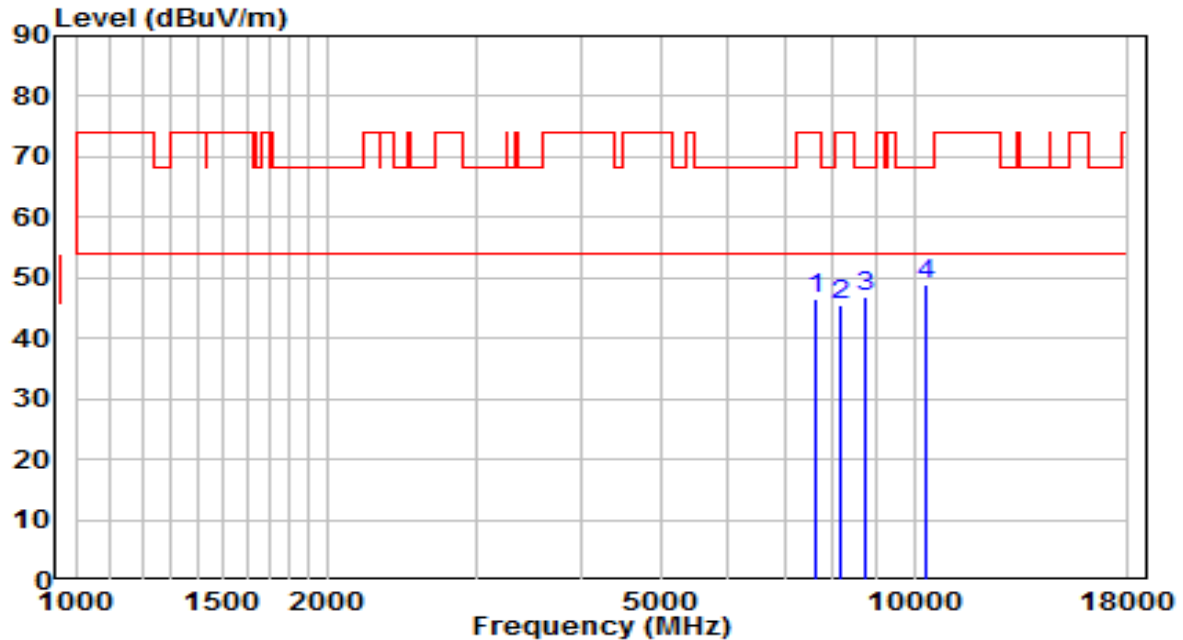


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.30	13.14	46.45	-27.55	74.00	Peak
2	8174.000	31.87	13.51	45.38	-28.62	74.00	Peak
3	8760.500	32.64	14.29	46.94	-21.26	68.20	Peak
4	* 10350.000	31.04	17.97	49.01	-19.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	AC 120V/60Hz

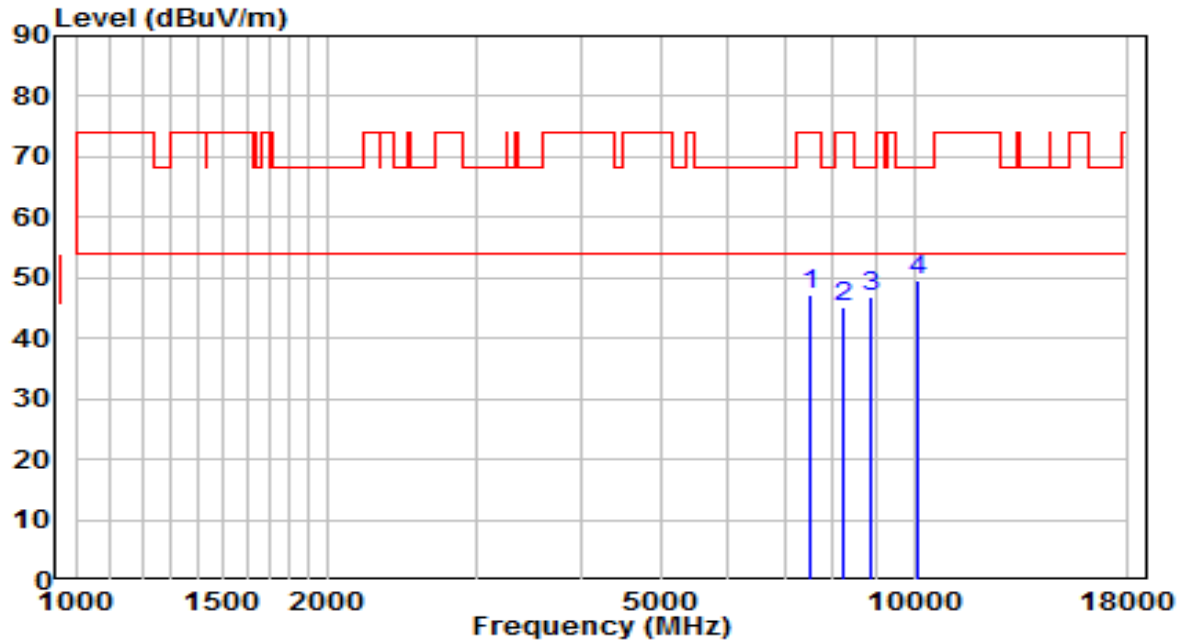


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	34.19	13.02	47.22	-26.78	74.00	Peak
2	8250.500	31.79	13.54	45.34	-28.66	74.00	Peak
3	8854.000	32.25	14.52	46.77	-21.43	68.20	Peak
4	* 10129.000	32.59	17.08	49.67	-18.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	AC 120V/60Hz

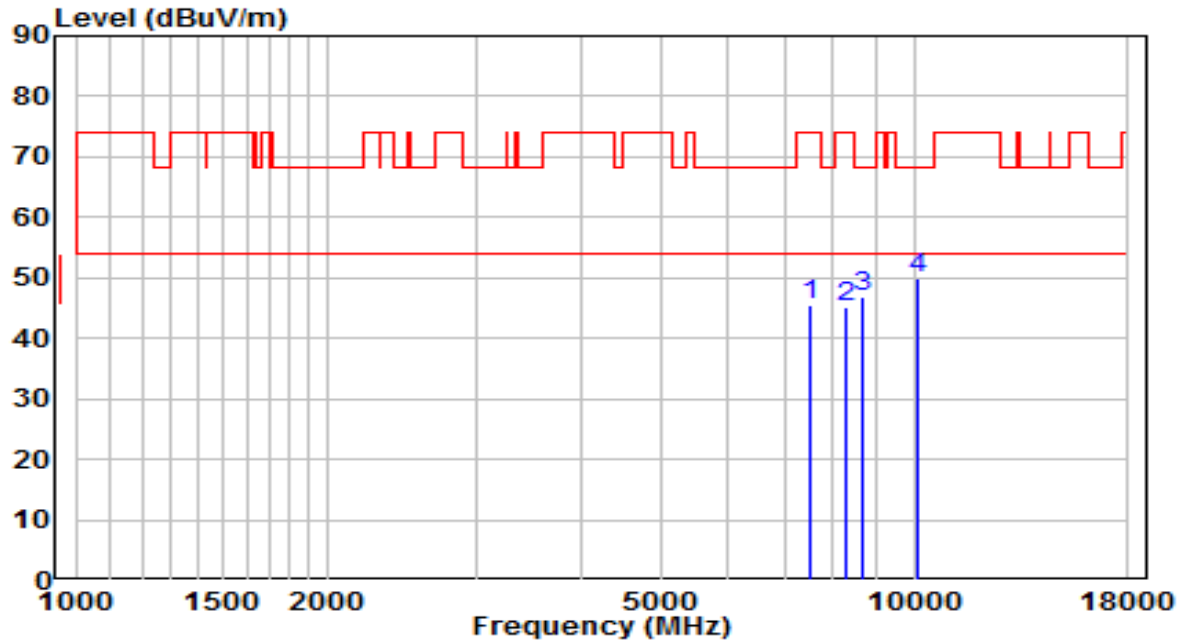


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	32.45	12.99	45.44	-28.56	74.00	Peak
2	8267.500	31.70	13.55	45.25	-28.75	74.00	Peak
3	8709.500	32.68	14.17	46.85	-21.35	68.20	Peak
4	* 10129.000	32.74	17.08	49.81	-18.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	AC 120V/60Hz

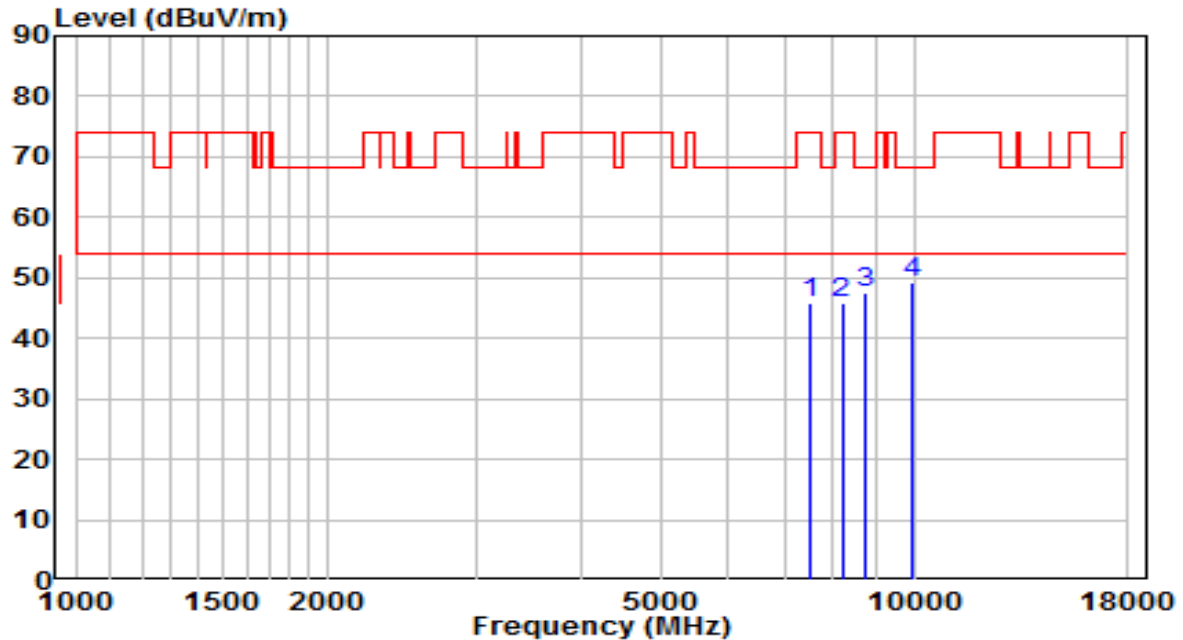


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7511.000	32.86	13.02	45.88	-28.12	74.00	Peak
2	8199.500	32.34	13.52	45.86	-28.14	74.00	Peak
3	8726.500	33.41	14.21	47.62	-20.58	68.20	Peak
4	* 9976.000	32.78	16.52	49.30	-18.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	AC 120V/60Hz

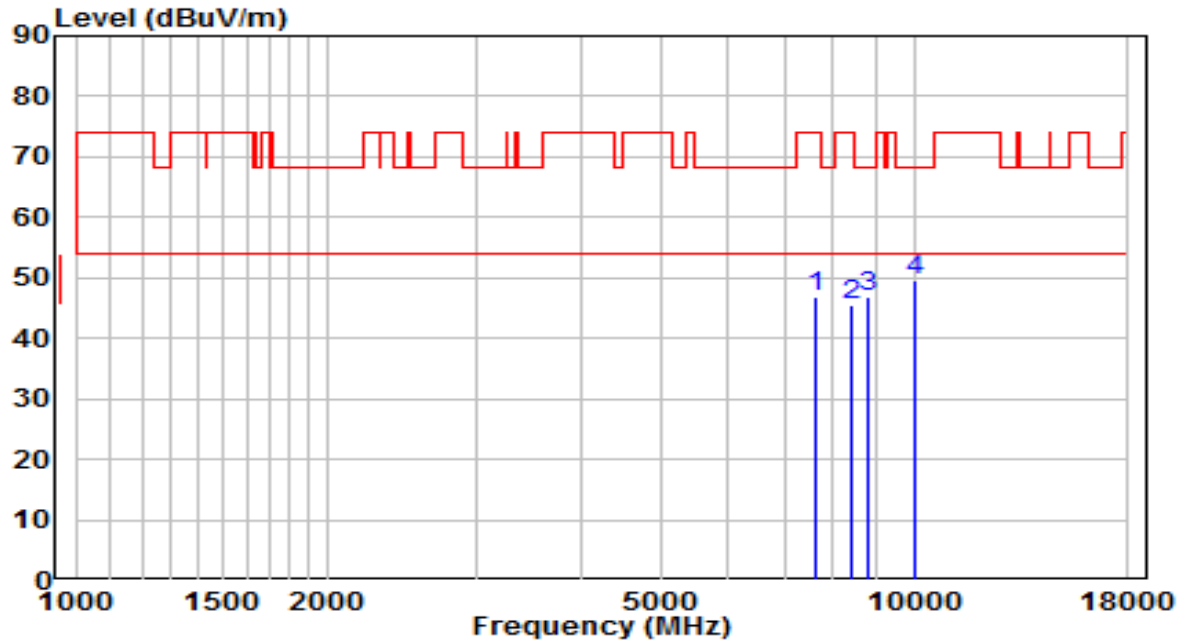


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7647.000	33.84	13.14	46.98	-27.02	74.00	Peak
2	8412.000	31.91	13.62	45.52	-28.48	74.00	Peak
3	8820.000	32.41	14.44	46.85	-21.35	68.20	Peak
4	* 10044.000	32.69	16.74	49.43	-18.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	AC 120V/60Hz

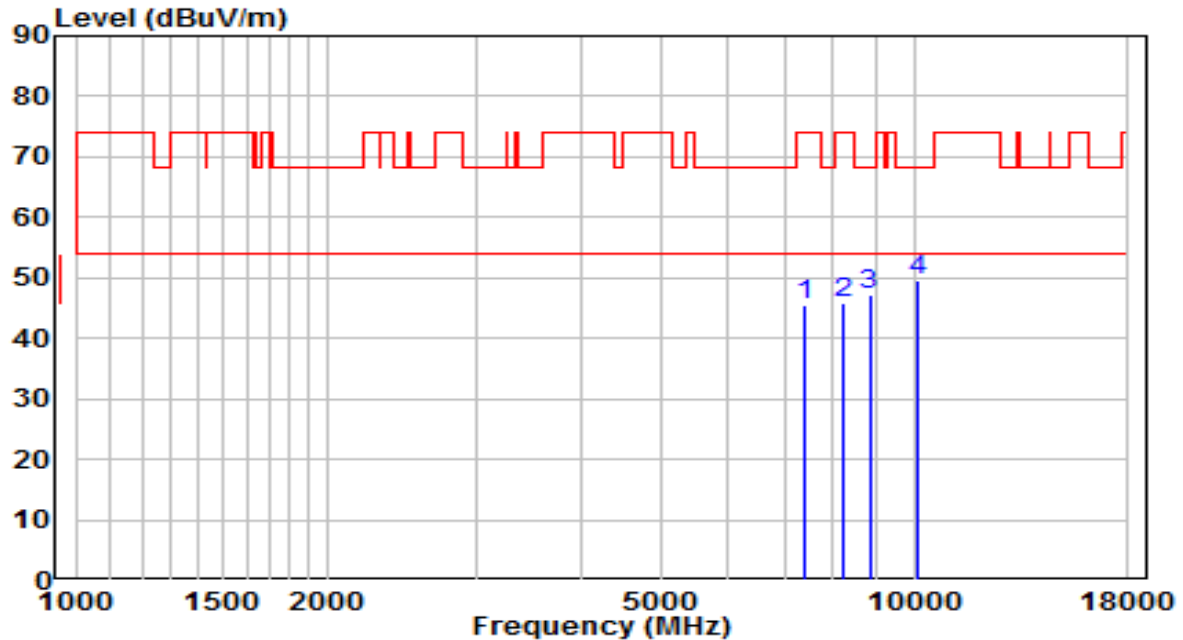


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	32.99	12.57	45.56	-28.44	74.00	Peak
2	8250.500	32.47	13.54	46.01	-27.99	74.00	Peak
3	8845.500	32.83	14.50	47.34	-20.86	68.20	Peak
4	* 10129.000	32.62	17.08	49.70	-18.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	AC 120V/60Hz

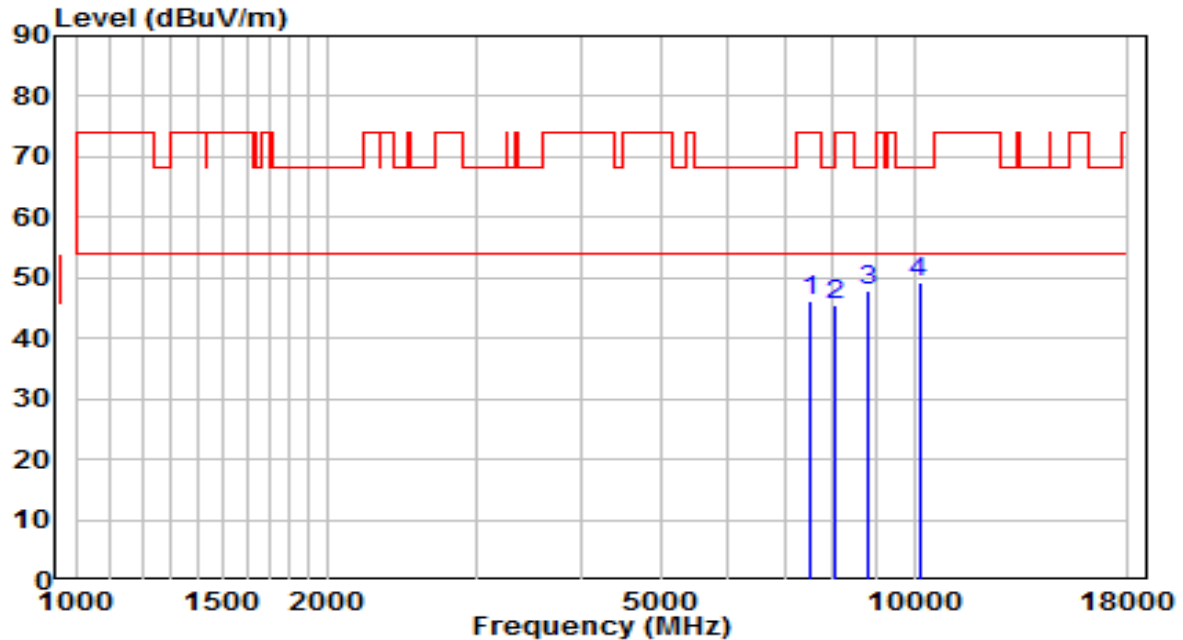


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	33.11	12.99	46.10	-27.90	74.00	Peak
2	8046.500	32.19	13.45	45.64	-28.36	74.00	Peak
3	8820.000	33.57	14.44	48.01	-20.19	68.20	Peak
4	* 10137.500	32.12	17.11	49.24	-18.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	AC 120V/60Hz

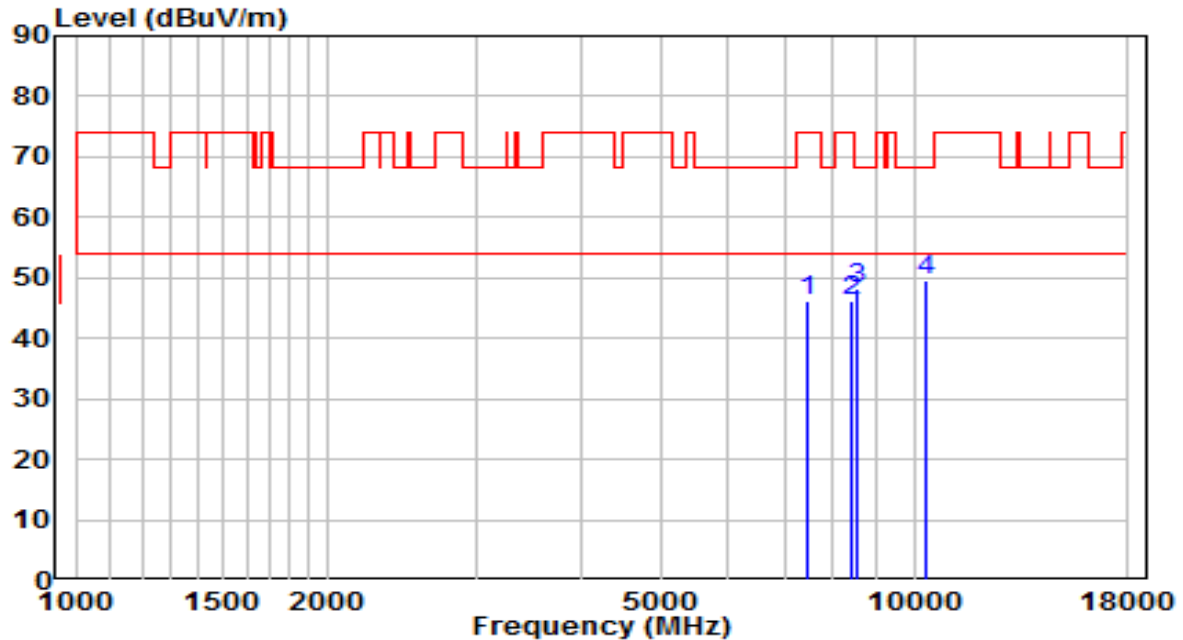


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7468.500	33.21	12.88	46.08	-27.92	74.00	Peak
2	8412.000	32.41	13.62	46.02	-27.98	74.00	Peak
3	8573.500	34.25	13.84	48.08	-20.12	68.20	Peak
4	* 10341.500	31.70	17.93	49.63	-18.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580MHz	Test Voltage	AC 120V/60Hz

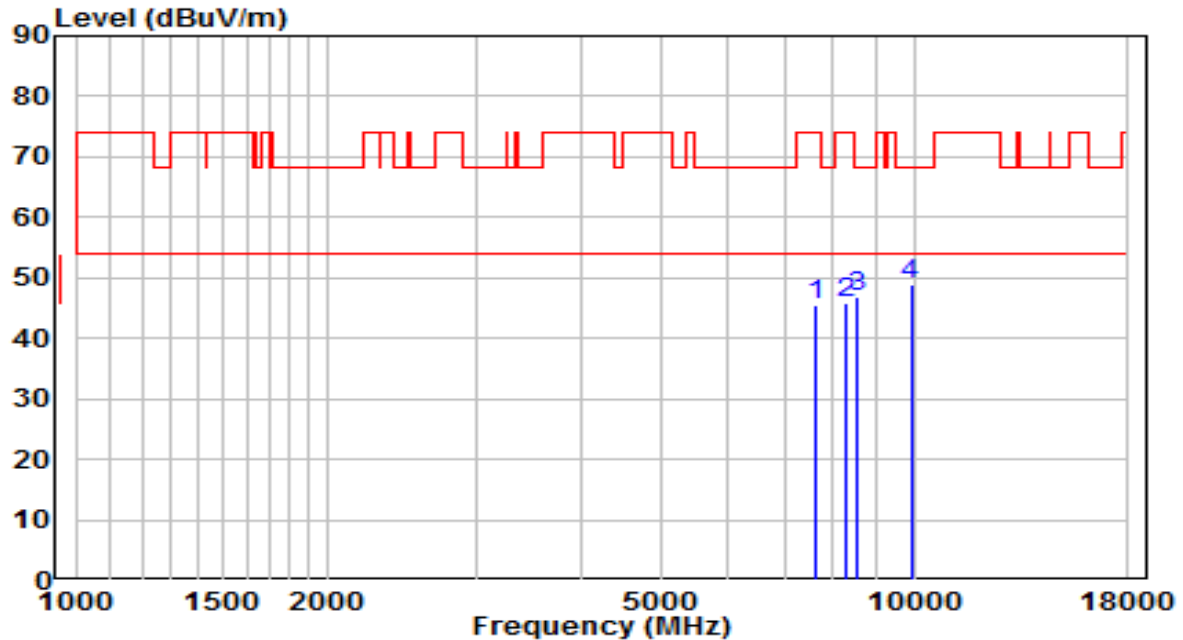


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7647.000	32.32	13.14	45.46	-28.54	74.00	Peak
2	8267.500	32.42	13.55	45.97	-28.03	74.00	Peak
3	8548.000	33.25	13.77	47.02	-21.18	68.20	Peak
4	* 9908.000	32.67	16.41	49.07	-19.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580MHz	Test Voltage	AC 120V/60Hz

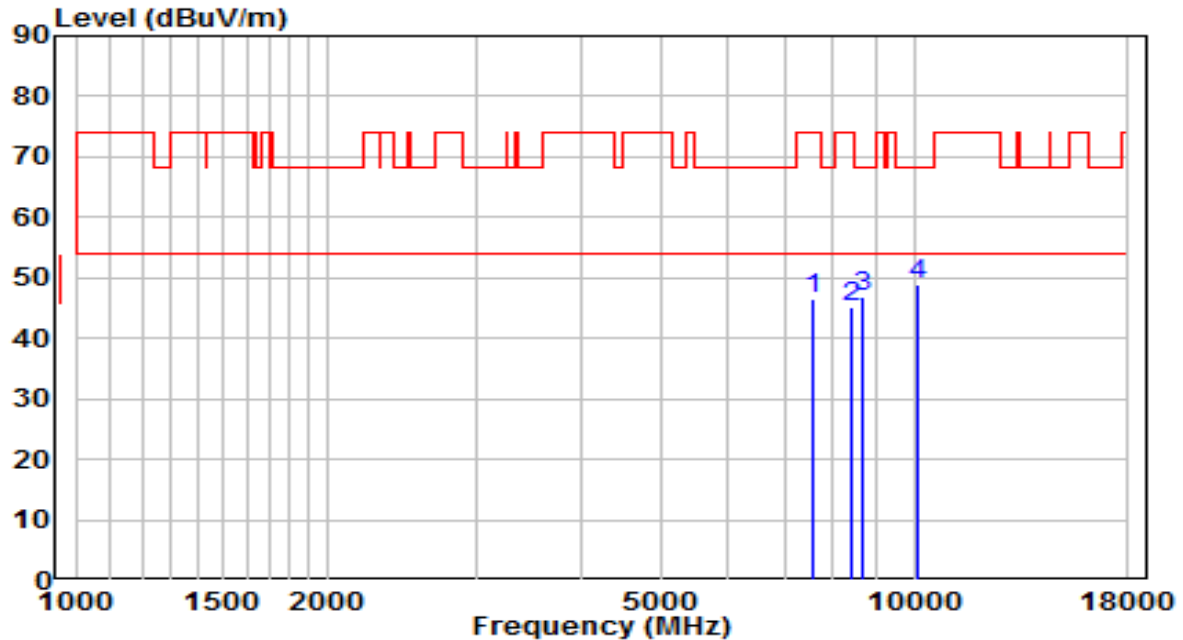


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7562.000	33.50	13.07	46.56	-27.44	74.00	Peak
2	8429.000	31.56	13.62	45.18	-28.82	74.00	Peak
3	8701.000	32.60	14.15	46.75	-21.45	68.20	Peak
4	* 10129.000	31.78	17.08	48.86	-19.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	AC 120V/60Hz

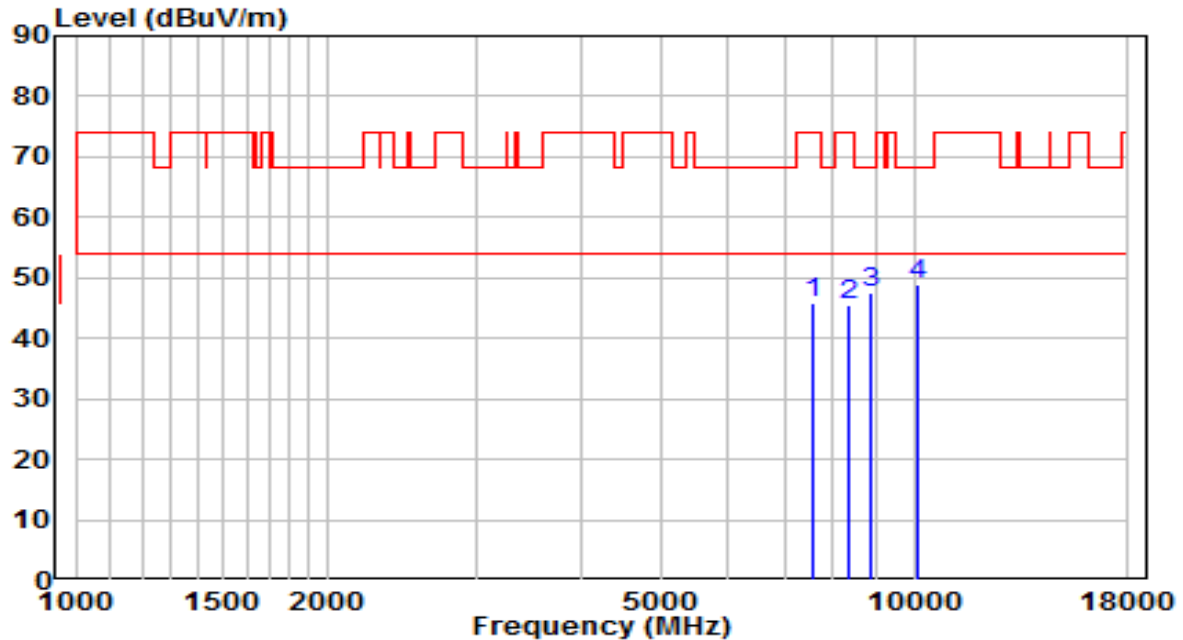


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7562.000	32.93	13.07	45.99	-28.01	74.00	Peak
2	8386.500	32.06	13.60	45.66	-28.34	74.00	Peak
3	8862.500	32.86	14.54	47.40	-20.80	68.20	Peak
4	* 10129.000	31.66	17.08	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	AC 120V/60Hz

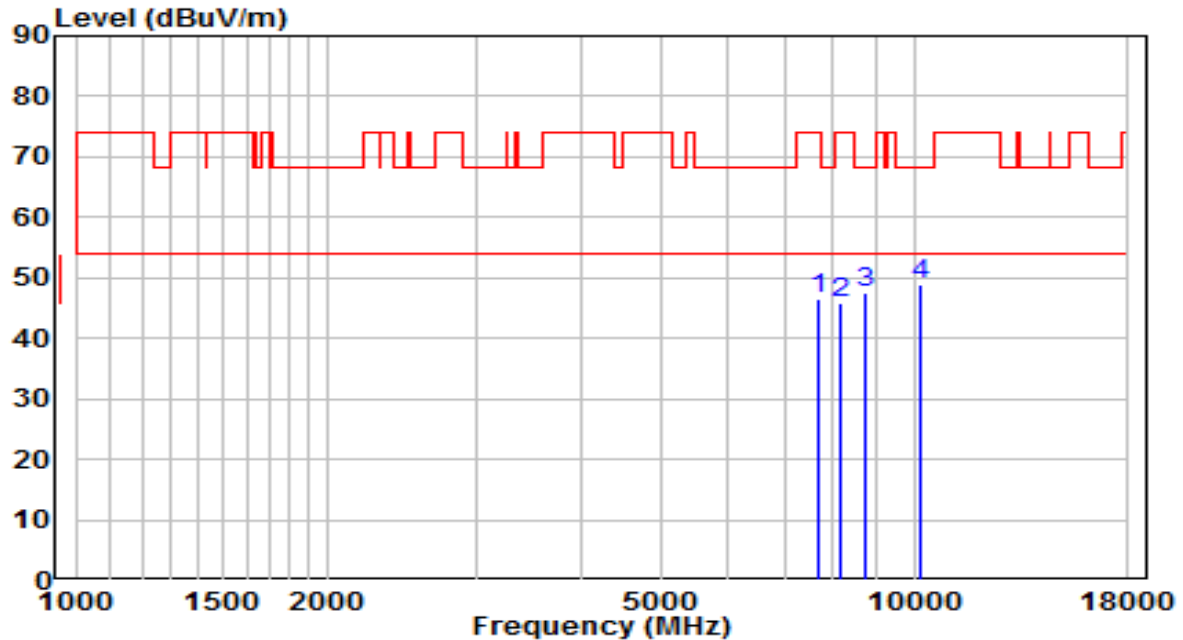


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	33.20	13.17	46.36	-27.64	74.00	Peak
2	8140.000	32.41	13.49	45.90	-28.10	74.00	Peak
3	8752.000	33.23	14.27	47.50	-20.70	68.20	Peak
4	* 10154.500	31.86	17.18	49.04	-19.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	AC 120V/60Hz

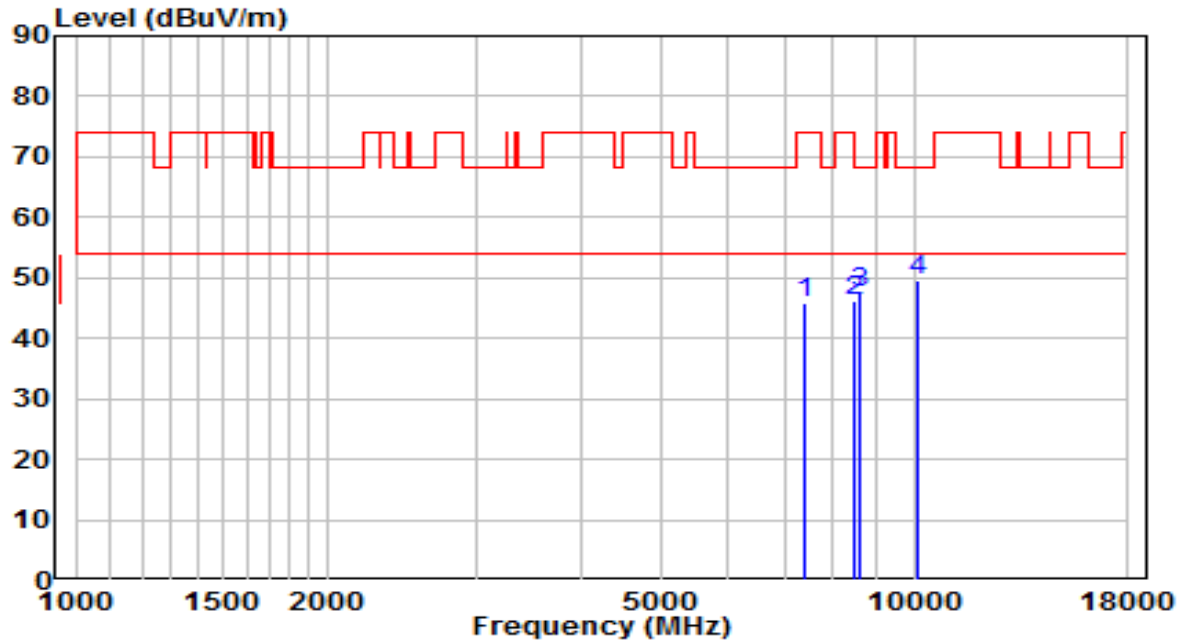


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7409.000	33.31	12.61	45.92	-28.08	74.00	Peak
2	8471.500	32.58	13.64	46.23	-27.77	74.00	Peak
3	8624.500	33.65	13.96	47.61	-20.59	68.20	Peak
4	* 10120.500	32.48	17.04	49.53	-18.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	AC 120V/60Hz

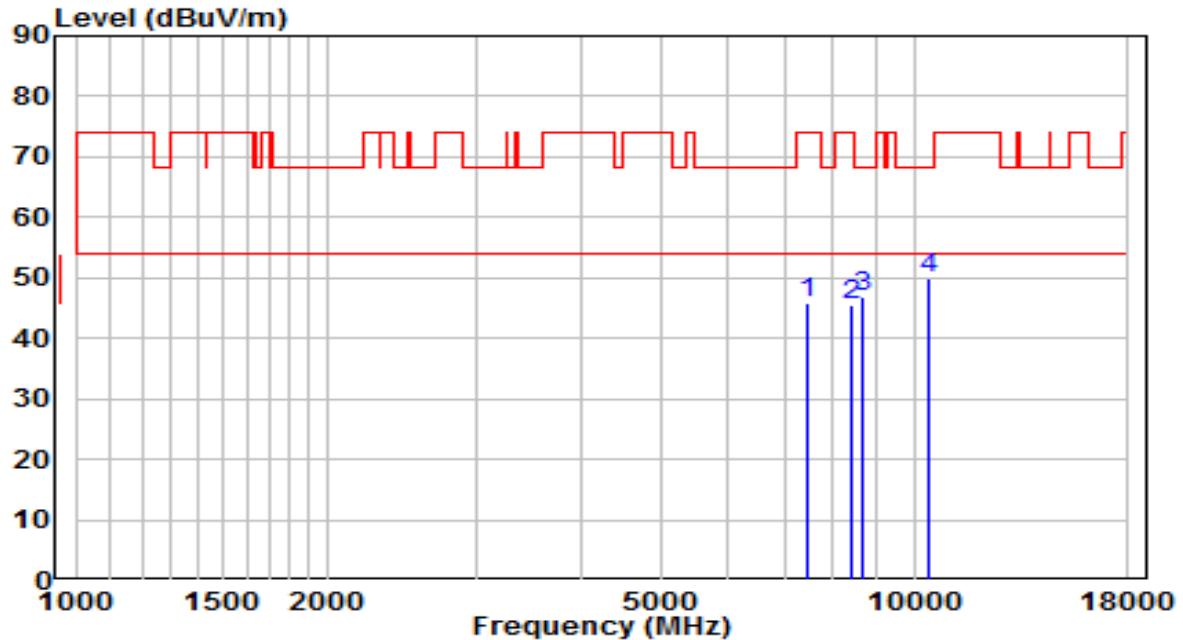


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	33.16	12.84	46.00	-28.00	74.00	Peak
2	8437.500	31.98	13.63	45.61	-28.39	74.00	Peak
3	8709.500	32.73	14.17	46.89	-21.31	68.20	Peak
4	* 10384.000	31.66	18.10	49.76	-18.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

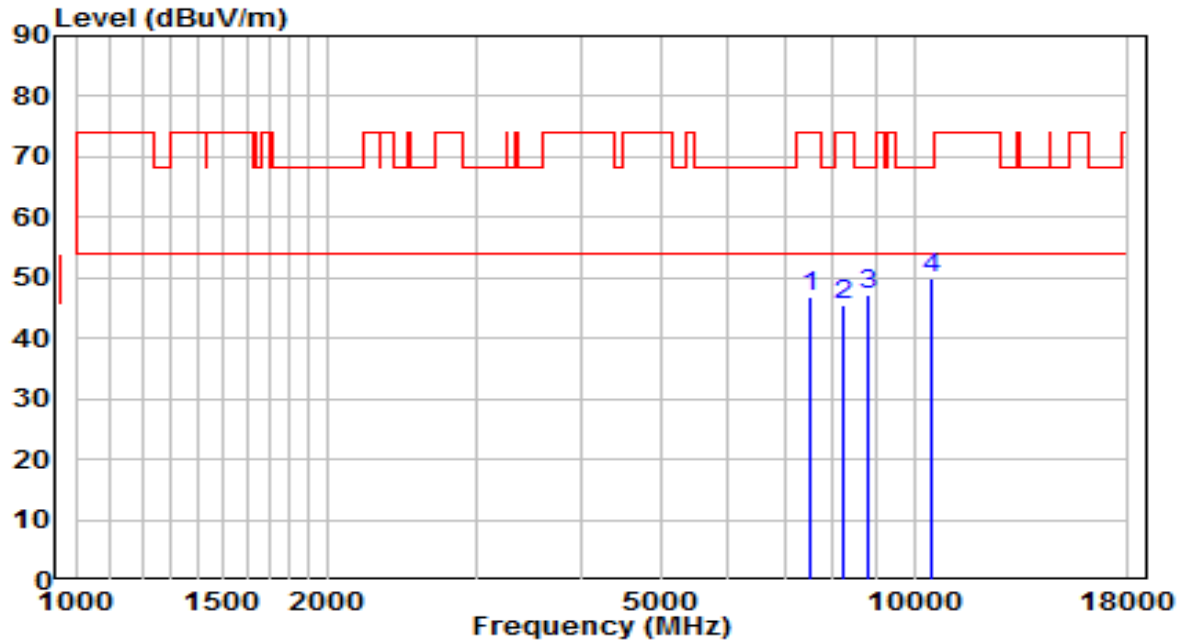


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	33.74	13.02	46.76	-27.24	74.00	Peak
2	8250.500	31.88	13.54	45.42	-28.58	74.00	Peak
3	8786.000	32.76	14.36	47.12	-21.08	68.20	Peak
4	* 10460.500	31.57	18.41	49.98	-18.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

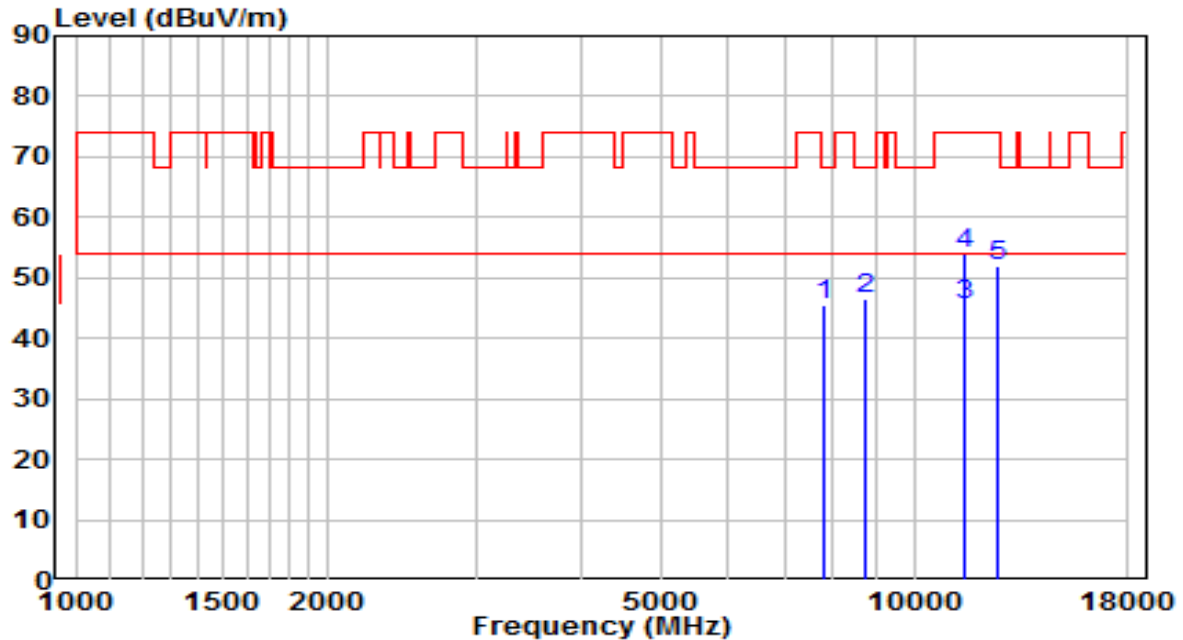


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7834.000	32.30	13.29	45.59	-22.61	68.20	Peak
2	8743.500	32.29	14.25	46.54	-21.66	68.20	Peak
3	* 11487.830	25.64	20.03	45.67	-8.33	54.00	Average
4	11489.000	33.96	20.03	53.99	-20.01	74.00	Peak
5	12611.000	33.38	18.73	52.11	-21.89	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

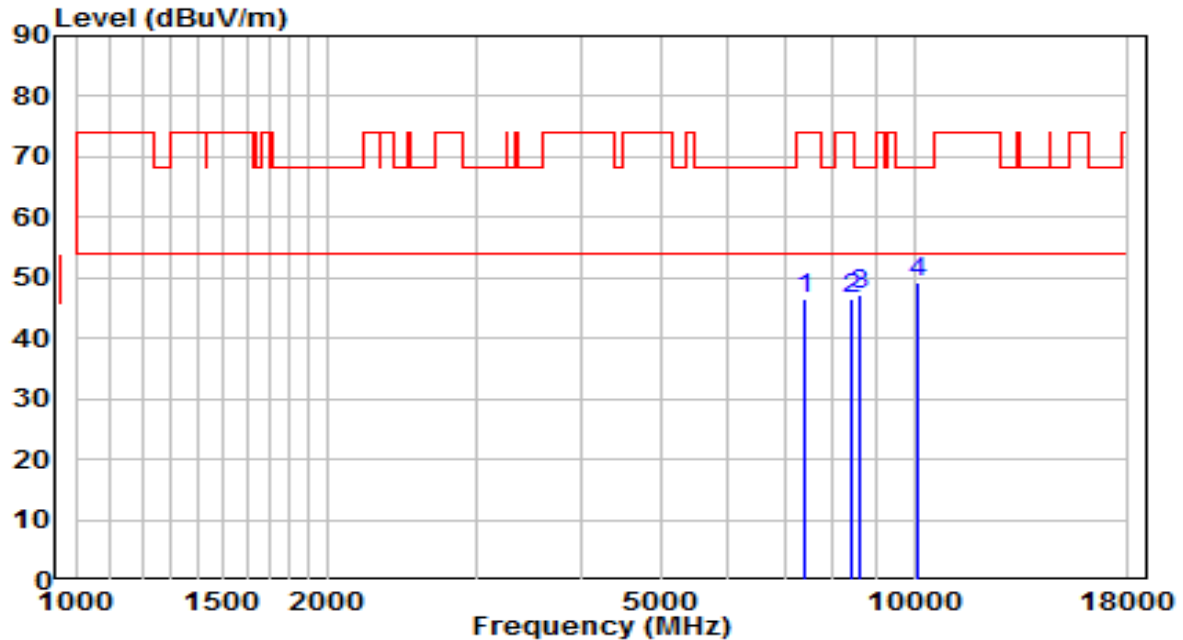


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7392.000	34.13	12.54	46.66	-27.34	74.00	Peak
2	8403.500	32.85	13.61	46.46	-27.54	74.00	Peak
3	8599.000	33.22	13.90	47.11	-21.09	68.20	Peak
4	* 10129.000	32.03	17.08	49.11	-19.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

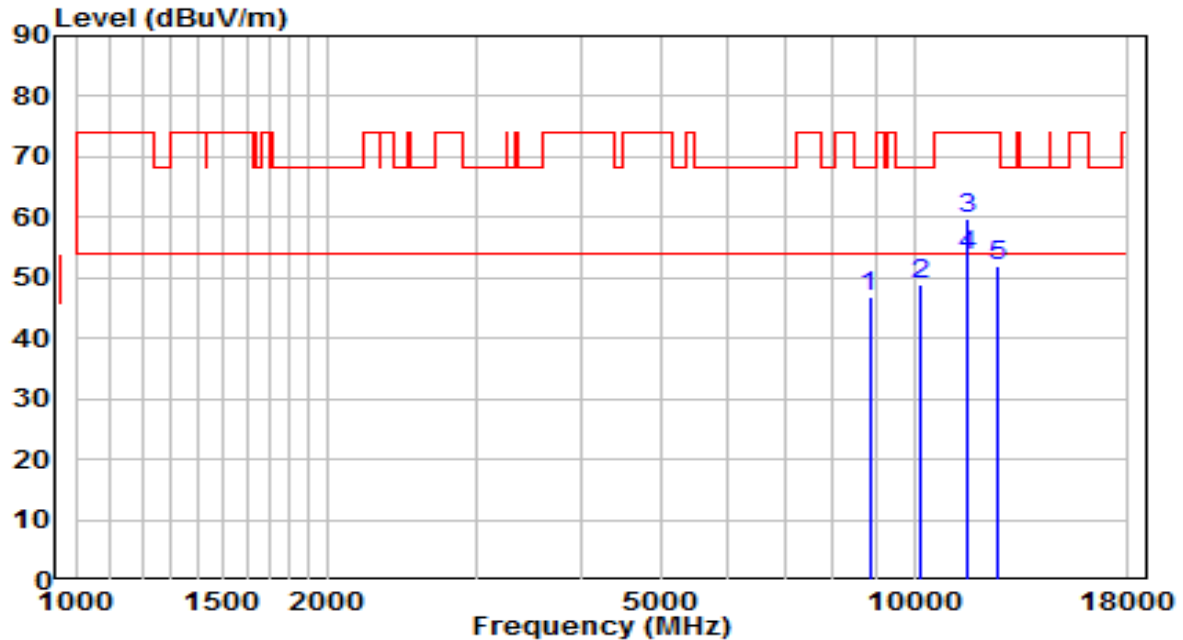


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8845.500	32.53	14.50	47.03	-21.17	68.20	Peak
2	10154.500	31.65	17.18	48.83	-19.37	68.20	Peak
3	11565.500	40.00	19.90	59.90	-14.10	74.00	Peak
4	* 11568.000	33.63	19.90	53.53	-0.47	54.00	Average
5	12577.000	33.20	18.63	51.83	-22.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

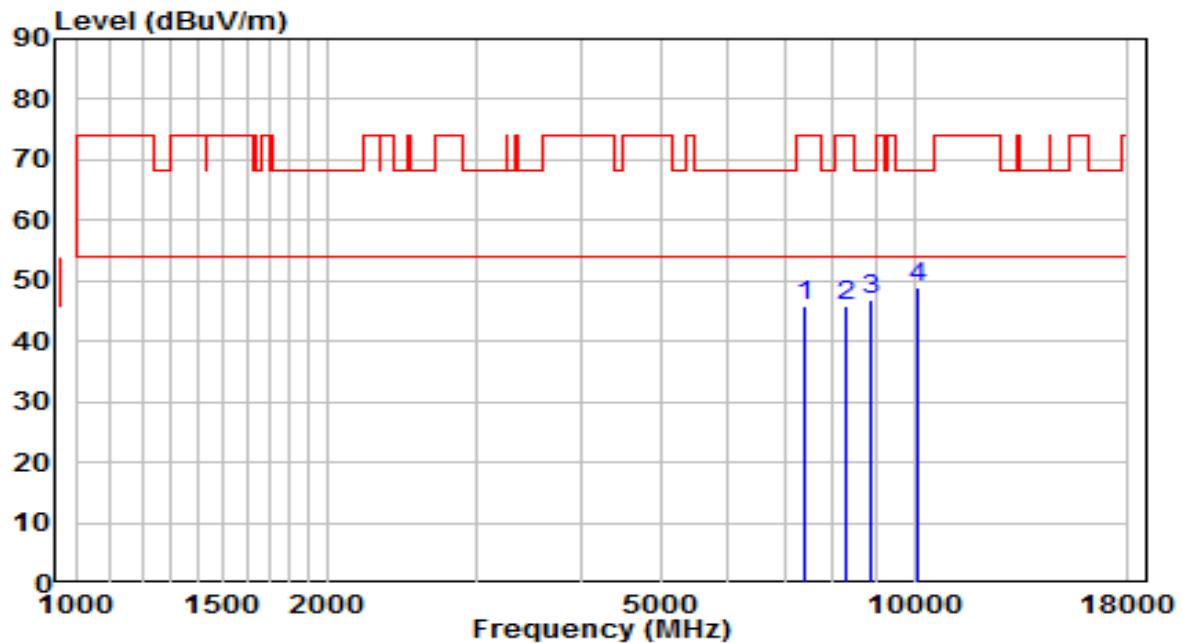


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7417.500	33.10	12.65	45.75	-28.25	74.00	Peak
2	8267.500	32.44	13.55	45.99	-28.01	74.00	Peak
3	8854.000	32.26	14.52	46.78	-21.42	68.20	Peak
4	* 10095.000	32.01	16.94	48.95	-19.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

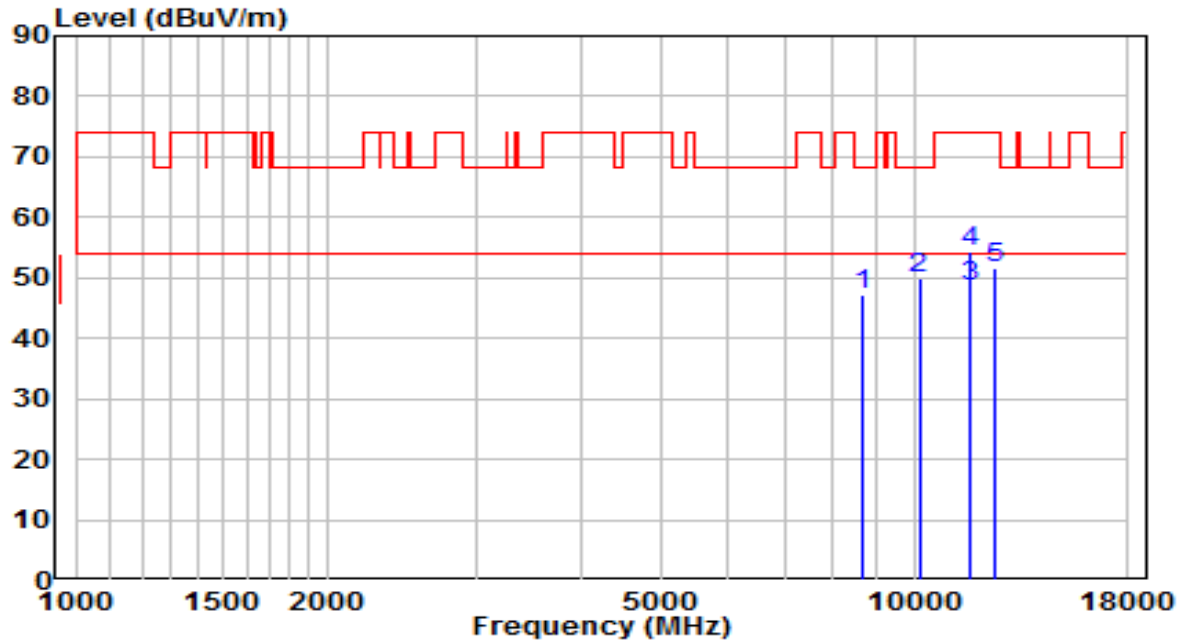


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8684.000	33.17	14.11	47.28	-20.92	68.20	Peak
2	10137.500	32.73	17.11	49.84	-18.36	68.20	Peak
3	* 11647.540	28.76	19.72	48.48	-5.52	54.00	Average
4	11650.500	34.55	19.71	54.25	-19.75	74.00	Peak
5	12458.000	33.33	18.45	51.78	-22.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

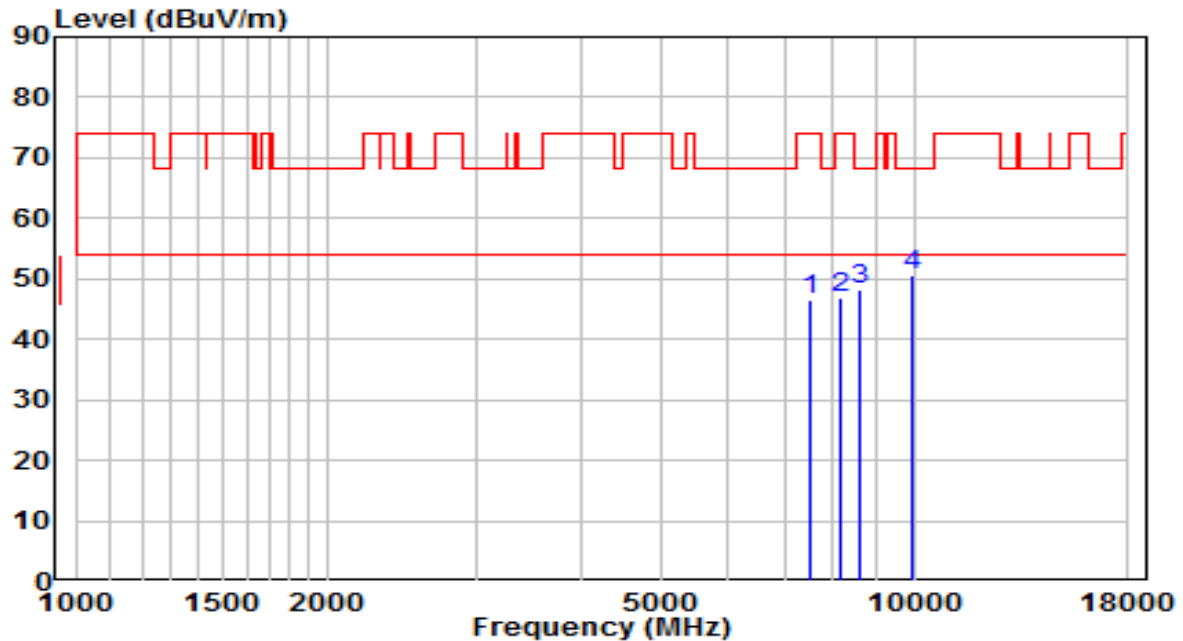


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	33.59	13.04	46.63	-27.37	74.00	Peak
2	8174.000	33.45	13.51	46.96	-27.04	74.00	Peak
3	8641.500	34.06	14.00	48.06	-20.14	68.20	Peak
4	* 9916.500	34.10	16.42	50.52	-17.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

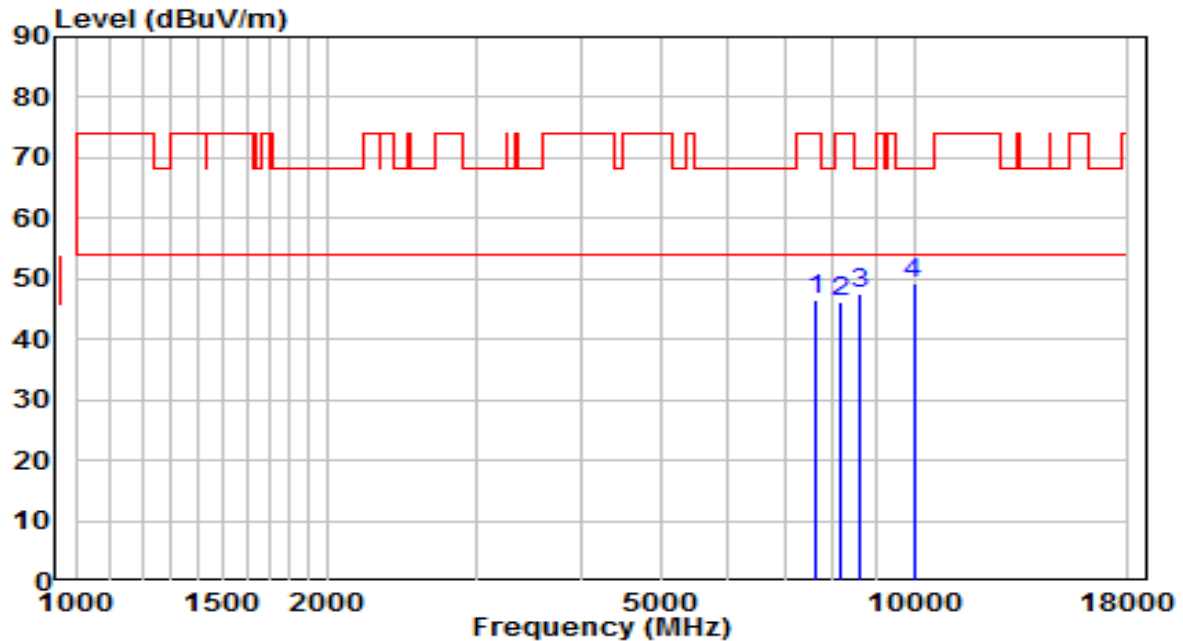


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7613.000	33.37	13.11	46.48	-27.52	74.00	Peak
2	8174.000	32.76	13.51	46.27	-27.73	74.00	Peak
3	8633.000	33.60	13.98	47.58	-20.62	68.20	Peak
4	* 9984.500	32.82	16.53	49.36	-18.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

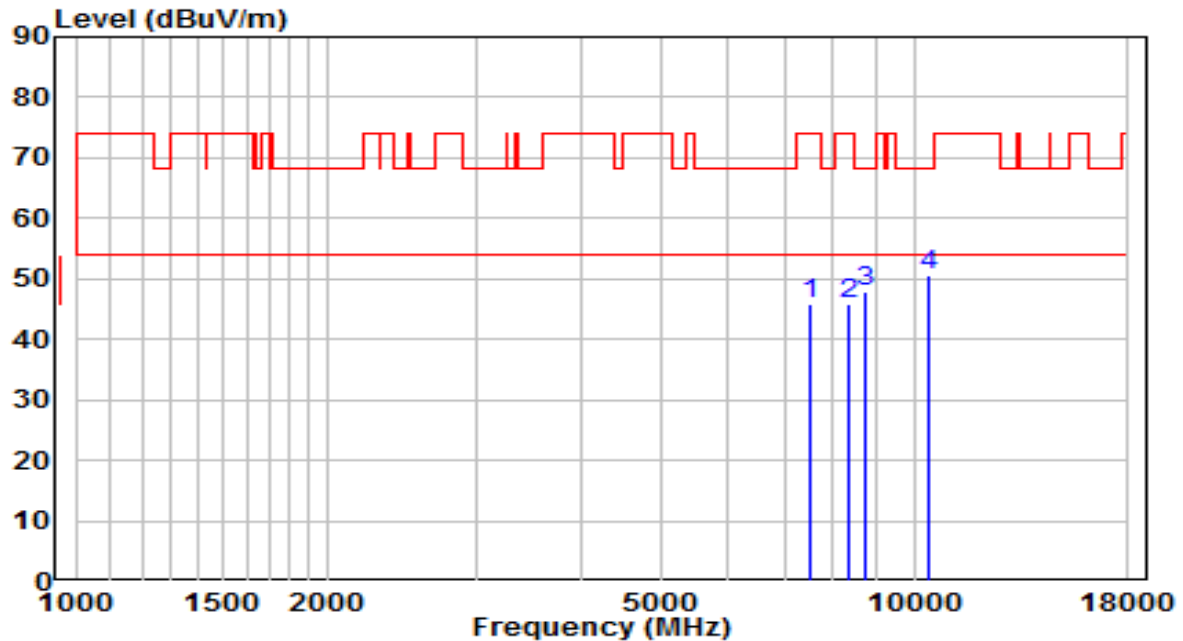


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	32.82	13.05	45.86	-28.14	74.00	Peak
2	8344.000	32.21	13.58	45.80	-28.20	74.00	Peak
3	8760.500	33.64	14.29	47.93	-20.27	68.20	Peak
4	* 10435.000	32.28	18.31	50.59	-17.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

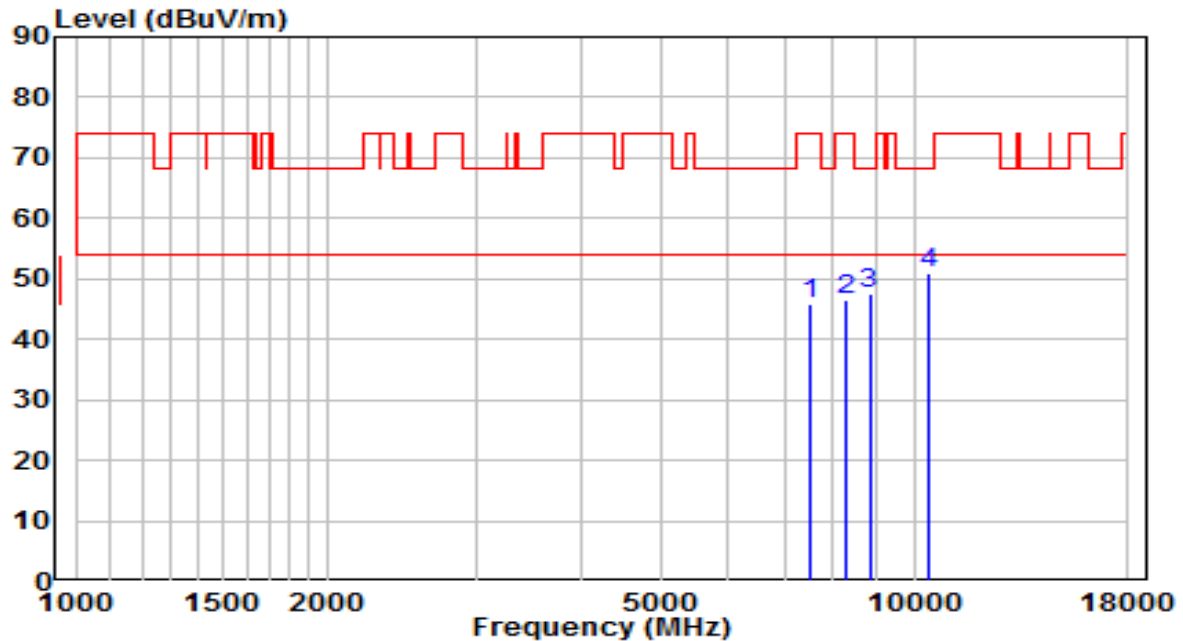


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7511.000	32.77	13.02	45.79	-28.21	74.00	Peak
2	8310.000	32.95	13.57	46.52	-27.48	74.00	Peak
3	8845.500	32.88	14.50	47.38	-20.82	68.20	Peak
4	* 10443.500	32.64	18.34	50.99	-17.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

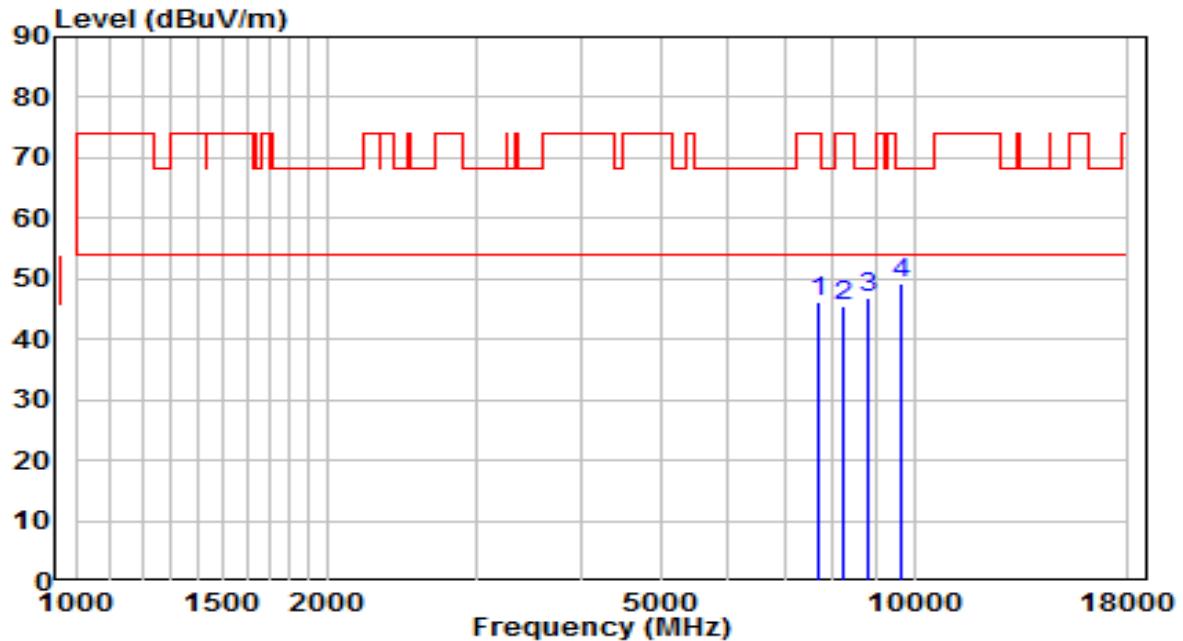


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7706.500	33.12	13.19	46.31	-27.69	74.00	Peak
2	8259.000	32.01	13.55	45.56	-28.44	74.00	Peak
3	8803.000	32.49	14.40	46.89	-21.31	68.20	Peak
4	* 9619.000	33.25	15.92	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

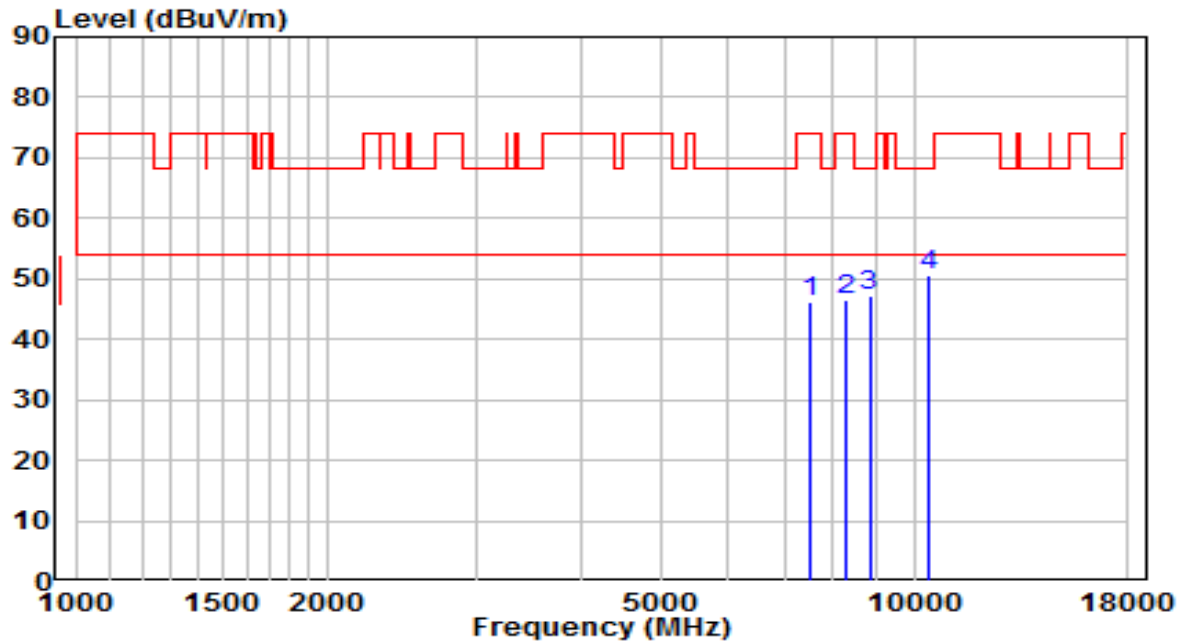


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7528.000	33.19	13.04	46.23	-27.77	74.00	Peak
2	8267.500	32.97	13.55	46.52	-27.48	74.00	Peak
3	8845.500	32.54	14.50	47.04	-21.16	68.20	Peak
4	* 10401.000	32.29	18.17	50.46	-17.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

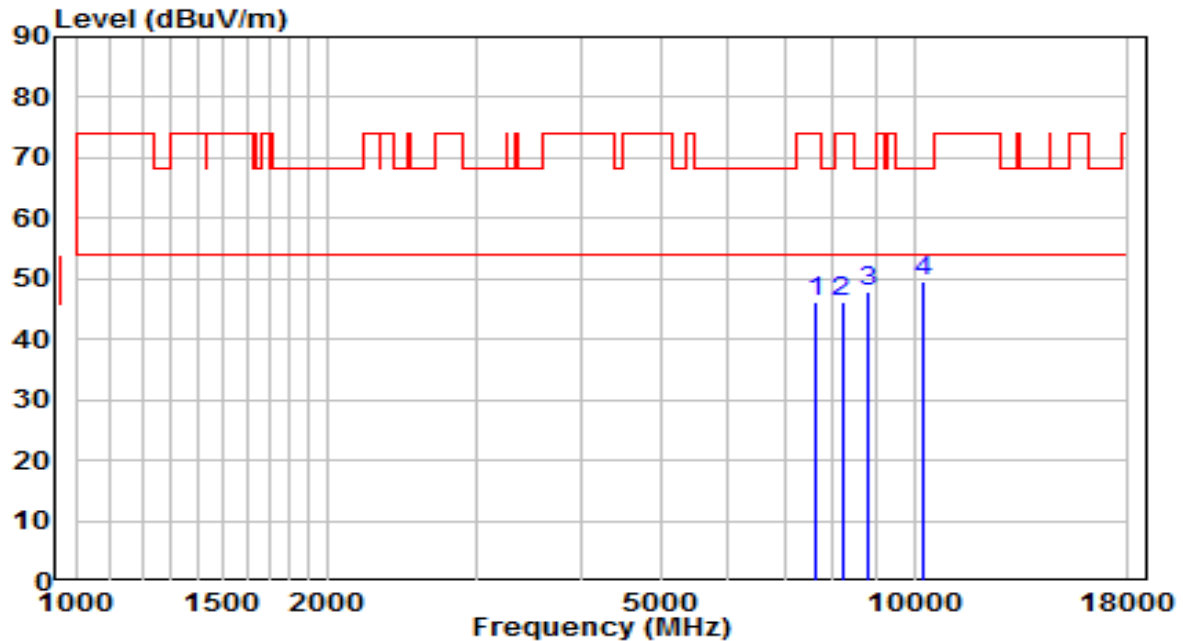


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	32.94	13.12	46.06	-27.94	74.00	Peak
2	8199.500	32.60	13.52	46.12	-27.88	74.00	Peak
3	8786.000	33.43	14.36	47.78	-20.42	68.20	Peak
4	* 10222.500	31.97	17.45	49.43	-18.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

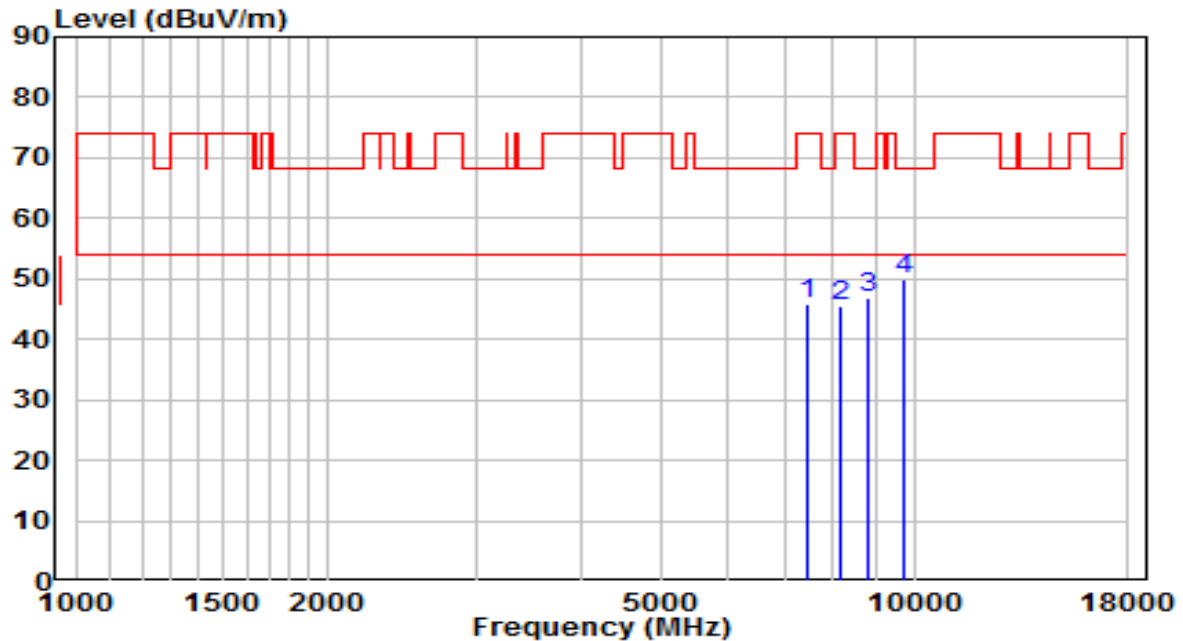


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.08	12.91	45.99	-28.01	74.00	Peak
2	8165.500	32.13	13.50	45.63	-28.37	74.00	Peak
3	8837.000	32.41	14.48	46.89	-21.31	68.20	Peak
4	* 9746.500	33.87	16.13	50.00	-18.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

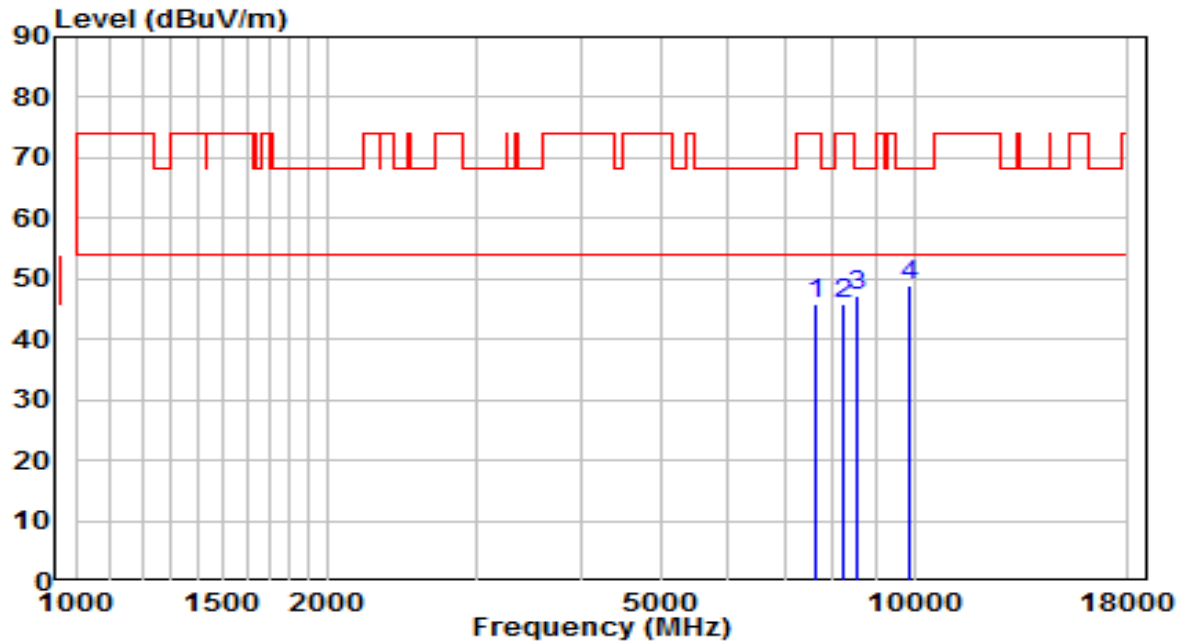


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	32.74	13.12	45.87	-28.13	74.00	Peak
2	8242.000	32.36	13.54	45.89	-28.11	74.00	Peak
3	8556.500	33.33	13.79	47.12	-21.08	68.20	Peak
4	* 9891.000	32.53	16.38	48.91	-19.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

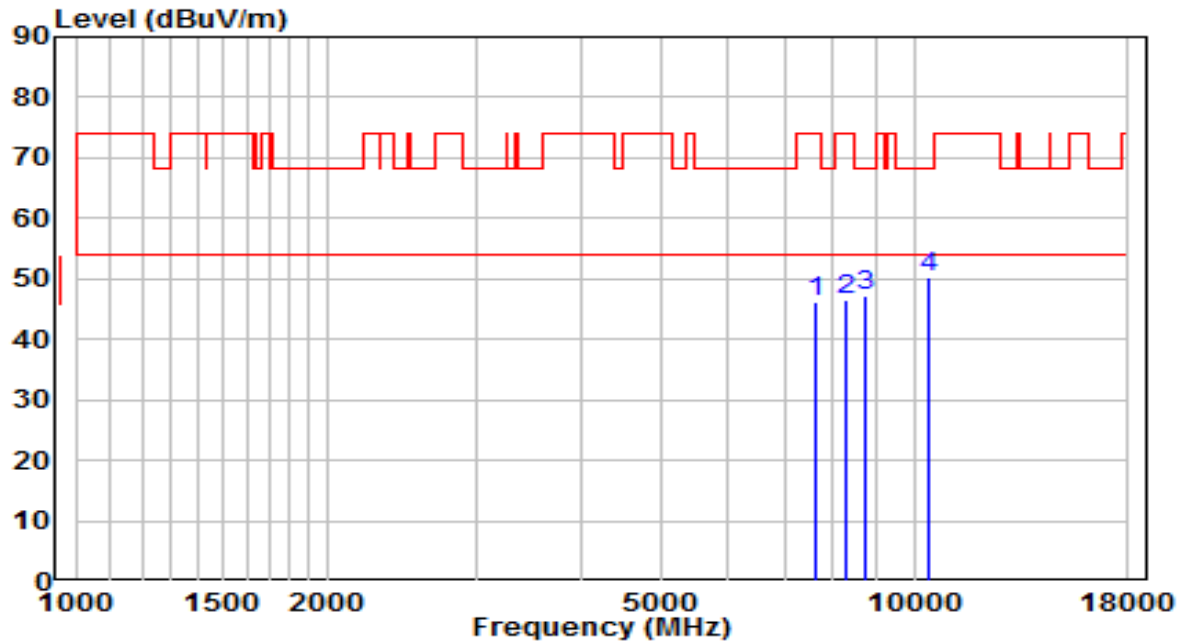


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.01	13.14	46.15	-27.85	74.00	Peak
2	8301.500	32.84	13.57	46.40	-27.60	74.00	Peak
3	8752.000	32.82	14.27	47.10	-21.10	68.20	Peak
4	* 10443.500	31.76	18.34	50.10	-18.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

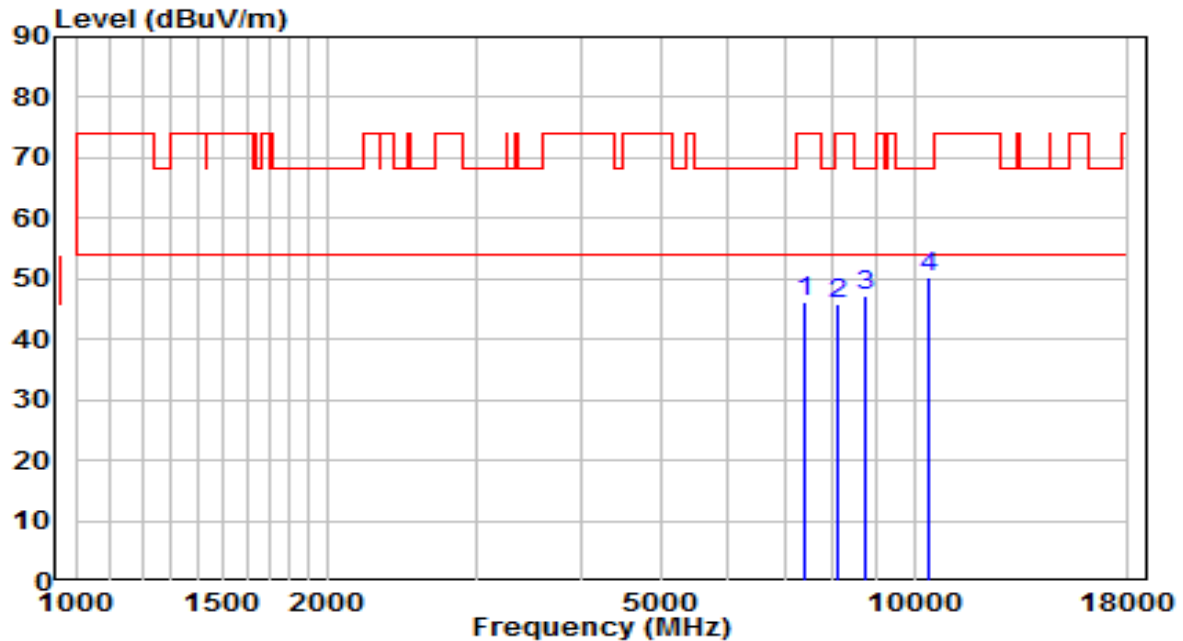


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7426.000	33.60	12.69	46.29	-27.71	74.00	Peak
2	8123.000	32.29	13.49	45.77	-28.23	74.00	Peak
3	8726.500	32.89	14.21	47.10	-21.10	68.20	Peak
4	* 10384.000	32.00	18.10	50.10	-18.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

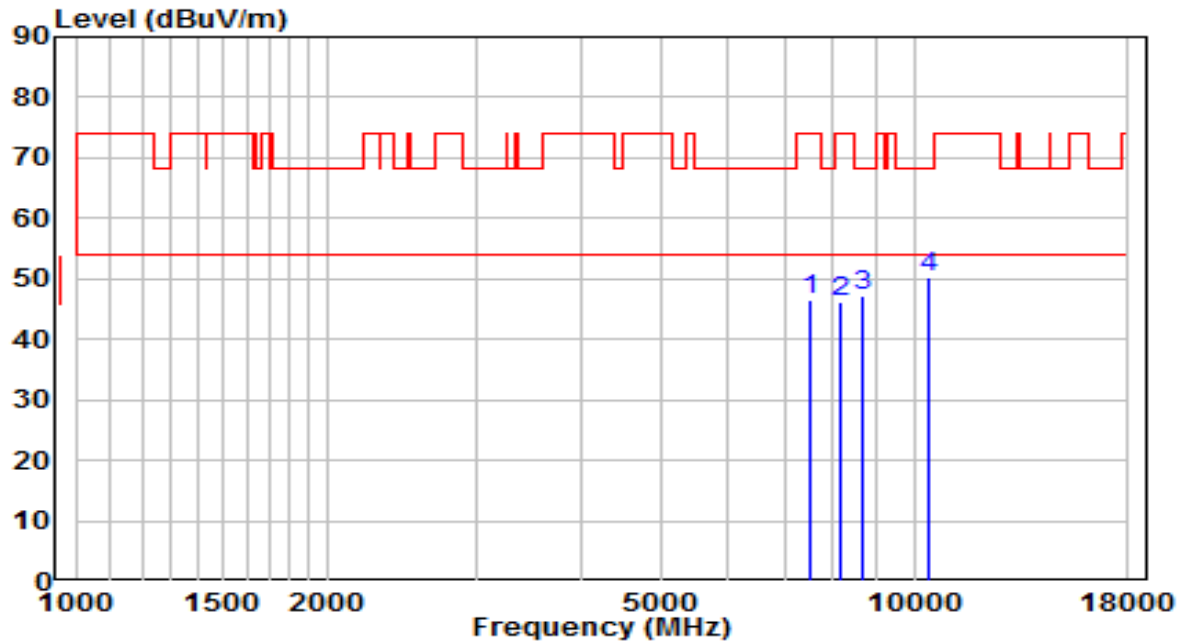


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7519.500	33.66	13.03	46.69	-27.31	74.00	Peak
2	8157.000	32.58	13.50	46.08	-27.92	74.00	Peak
3	8701.000	33.02	14.15	47.17	-21.03	68.20	Peak
4	* 10426.500	32.15	18.27	50.42	-17.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

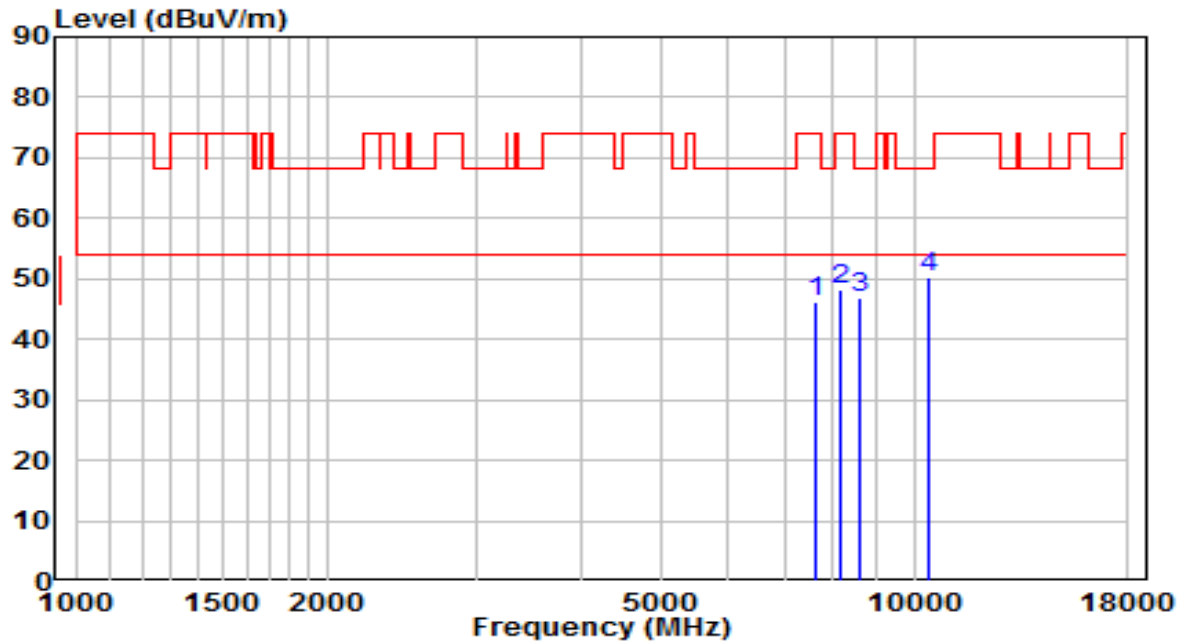


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	33.16	13.13	46.29	-27.71	74.00	Peak
2	8174.000	34.58	13.51	48.08	-25.92	74.00	Peak
3	8599.000	32.93	13.90	46.83	-21.37	68.20	Peak
4	* 10392.500	31.99	18.14	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

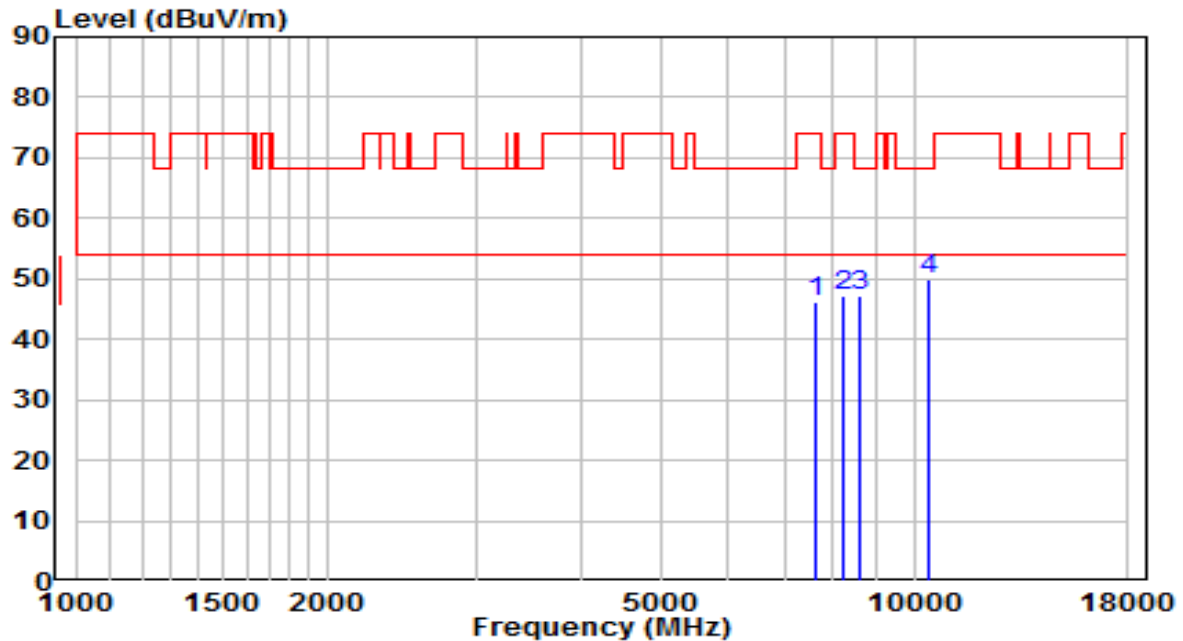


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.13	13.14	46.27	-27.73	74.00	Peak
2	8259.000	33.52	13.55	47.07	-26.93	74.00	Peak
3	8641.500	33.11	14.00	47.11	-21.09	68.20	Peak
4	* 10409.500	31.59	18.21	49.80	-18.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

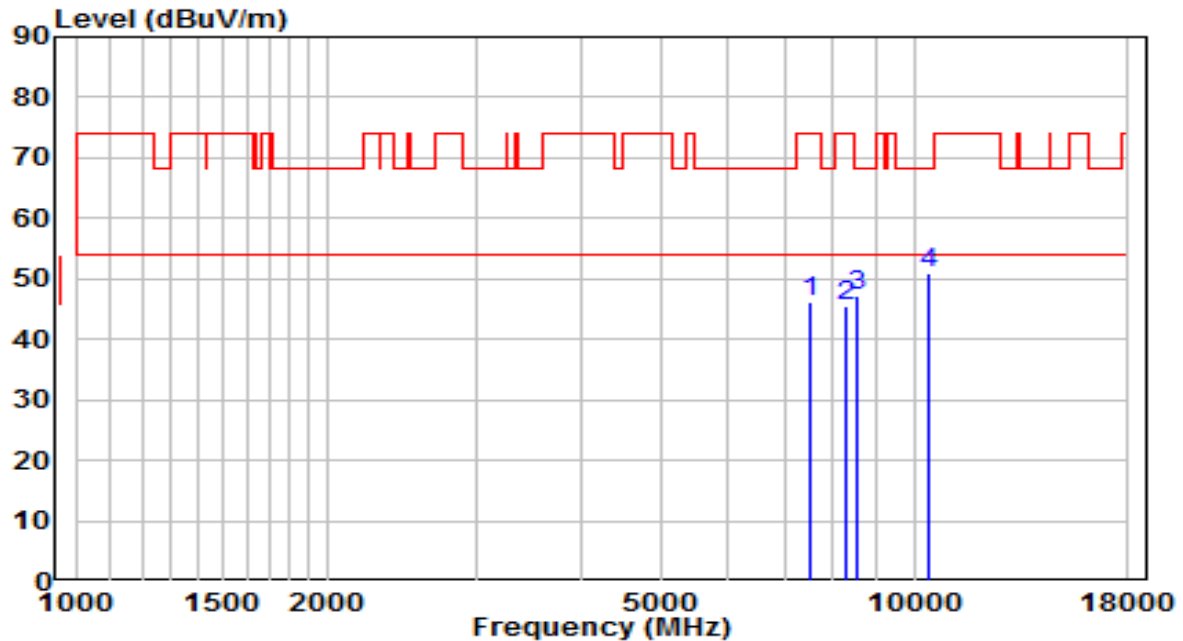


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7536.500	33.04	13.05	46.08	-27.92	74.00	Peak
2	8276.000	32.01	13.55	45.56	-28.44	74.00	Peak
3	8548.000	33.39	13.77	47.16	-21.04	68.20	Peak
4	* 10443.500	32.45	18.34	50.80	-17.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

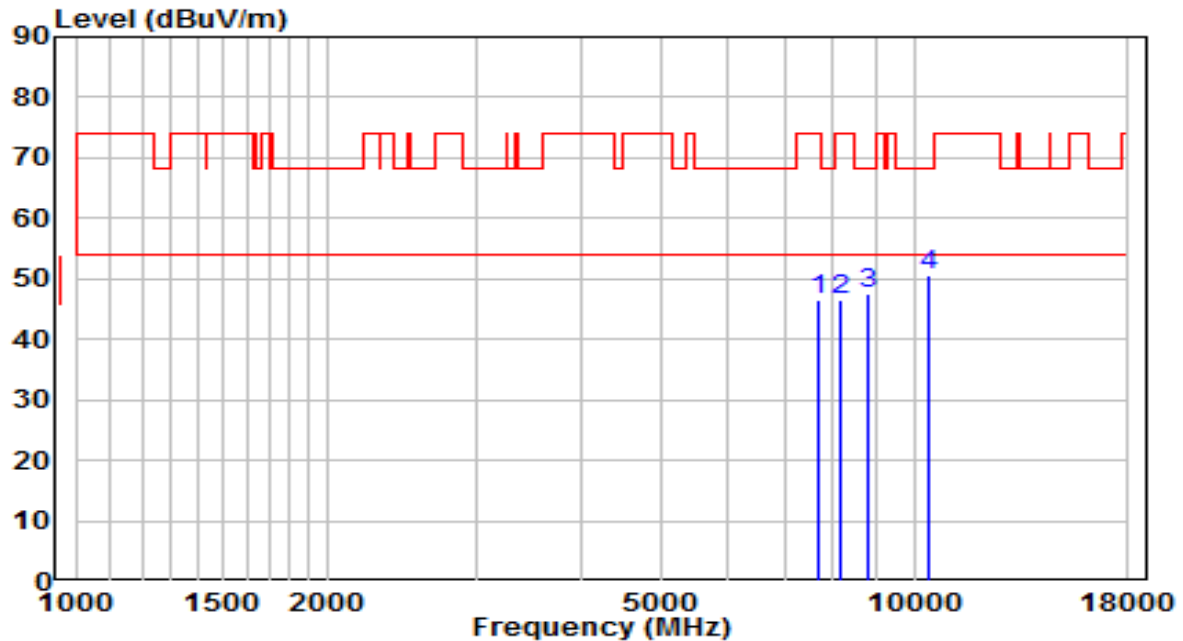


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	33.43	13.16	46.59	-27.41	74.00	Peak
2	8174.000	32.90	13.51	46.41	-27.59	74.00	Peak
3	8837.000	33.14	14.48	47.63	-20.57	68.20	Peak
4	* 10418.000	32.30	18.24	50.54	-17.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

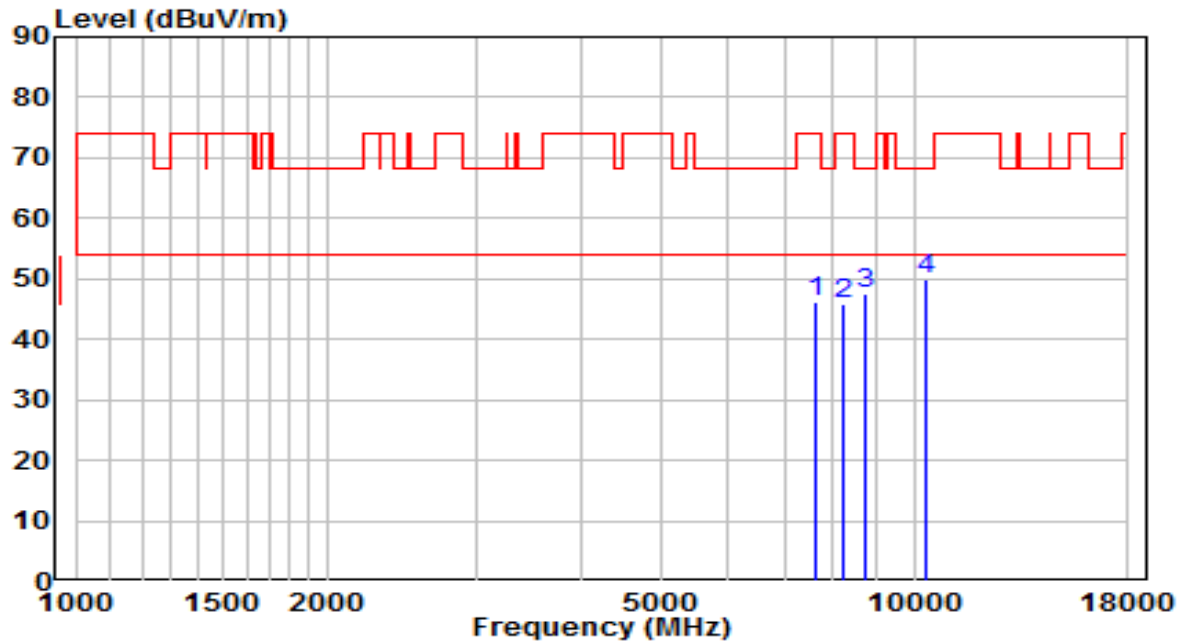


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	32.91	13.14	46.05	-27.95	74.00	Peak
2	8259.000	32.14	13.55	45.69	-28.31	74.00	Peak
3	8760.500	33.31	14.29	47.61	-20.59	68.20	Peak
4	* 10341.500	31.95	17.93	49.88	-18.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

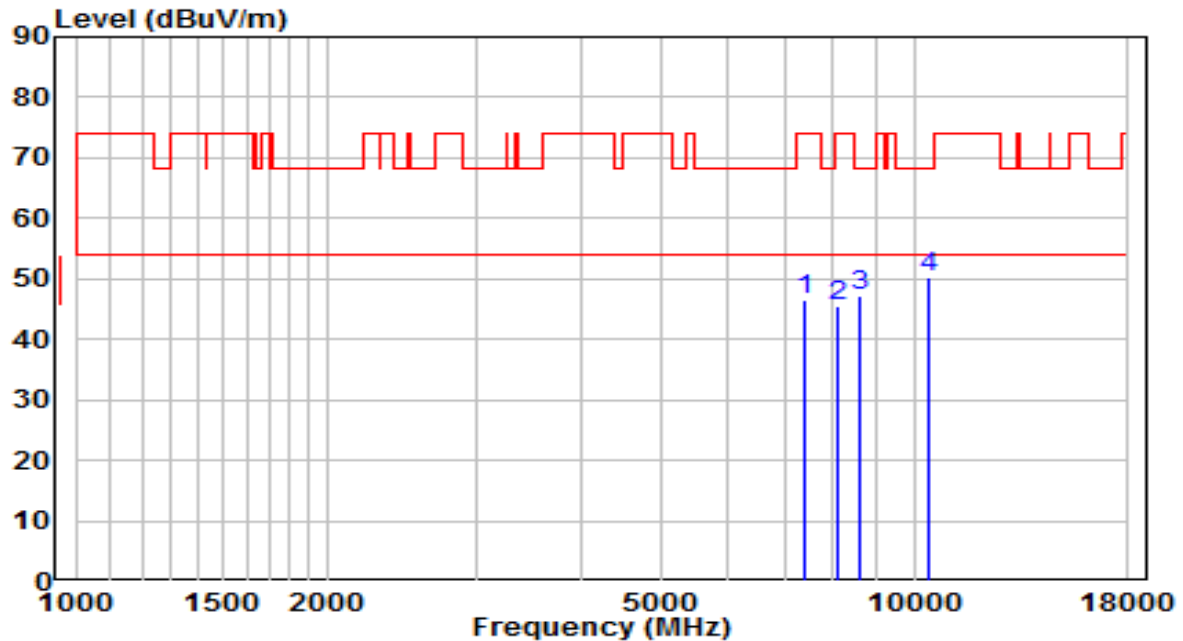


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	33.81	12.61	46.43	-27.57	74.00	Peak
2	8097.500	32.15	13.47	45.62	-28.38	74.00	Peak
3	8616.000	33.39	13.94	47.33	-20.87	68.20	Peak
4	* 10409.500	31.90	18.21	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

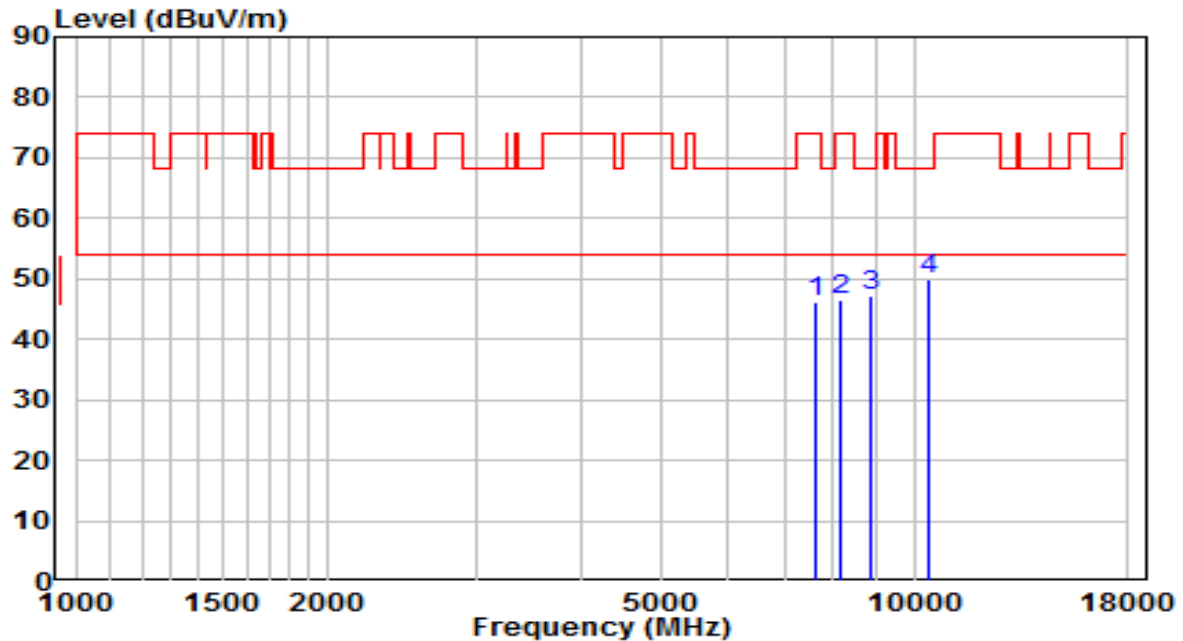


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	33.14	13.13	46.27	-27.73	74.00	Peak
2	8182.500	33.00	13.51	46.51	-27.49	74.00	Peak
3	8888.000	32.45	14.61	47.06	-21.14	68.20	Peak
4	* 10384.000	31.74	18.10	49.84	-18.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

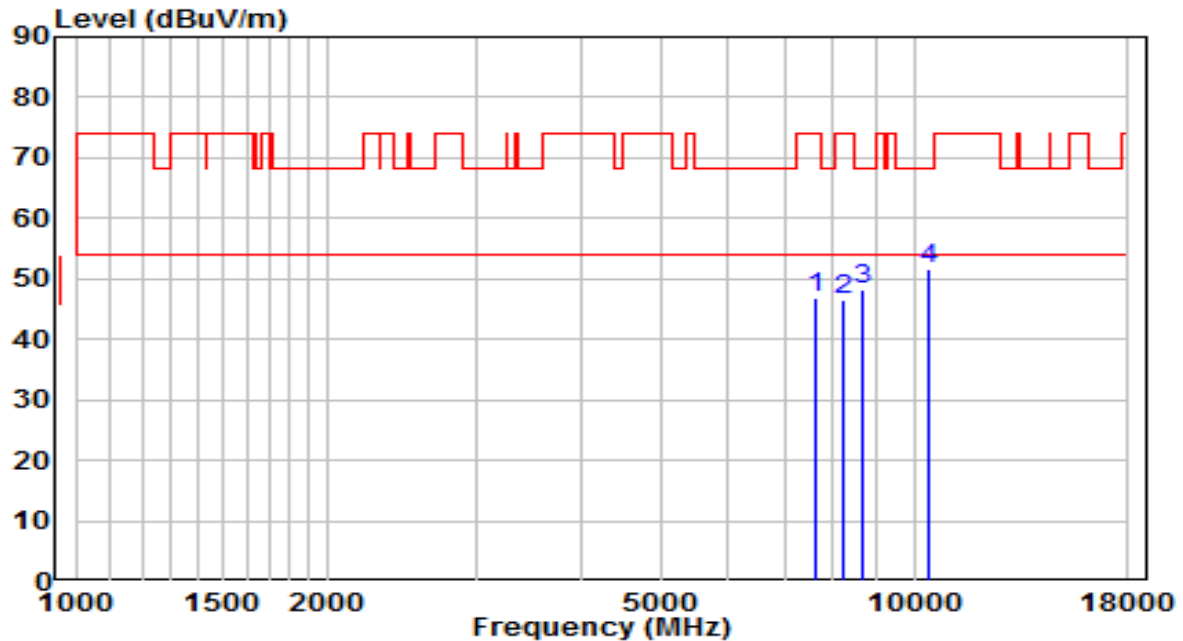


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7647.000	33.78	13.14	46.92	-27.08	74.00	Peak
2	8208.000	33.05	13.52	46.57	-27.43	74.00	Peak
3	8701.000	34.20	14.15	48.35	-19.85	68.20	Peak
4	* 10409.500	33.45	18.21	51.66	-16.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

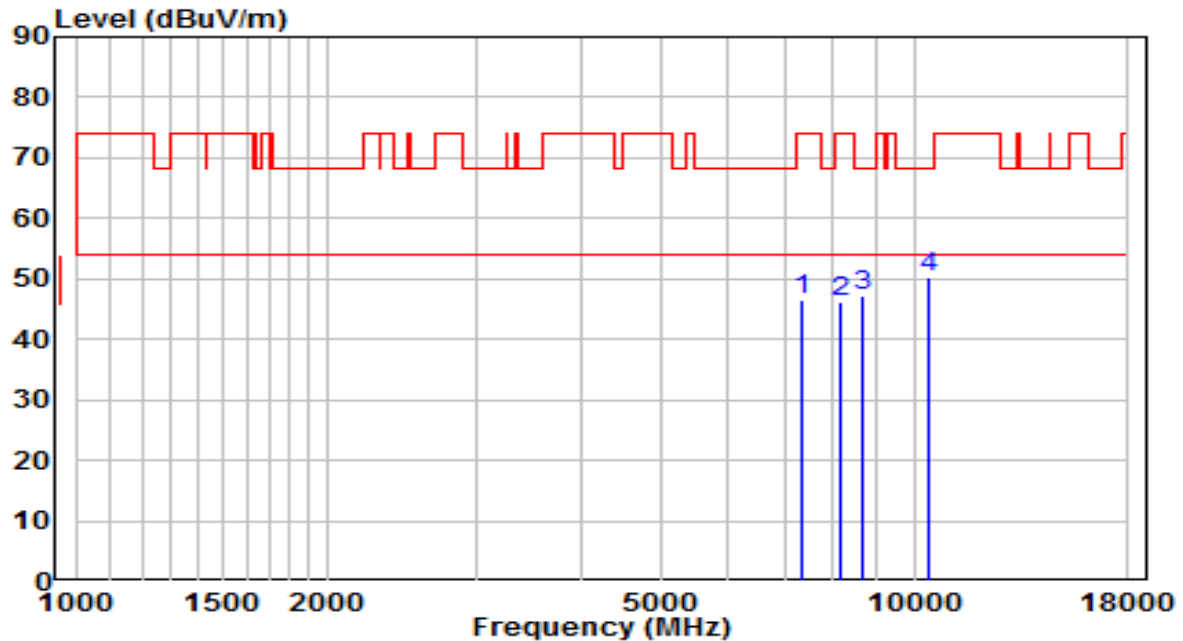


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7358.000	34.17	12.39	46.56	-27.44	74.00	Peak
2	8182.500	32.53	13.51	46.04	-27.96	74.00	Peak
3	8701.000	33.16	14.15	47.31	-20.89	68.20	Peak
4	* 10409.500	32.17	18.21	50.38	-17.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

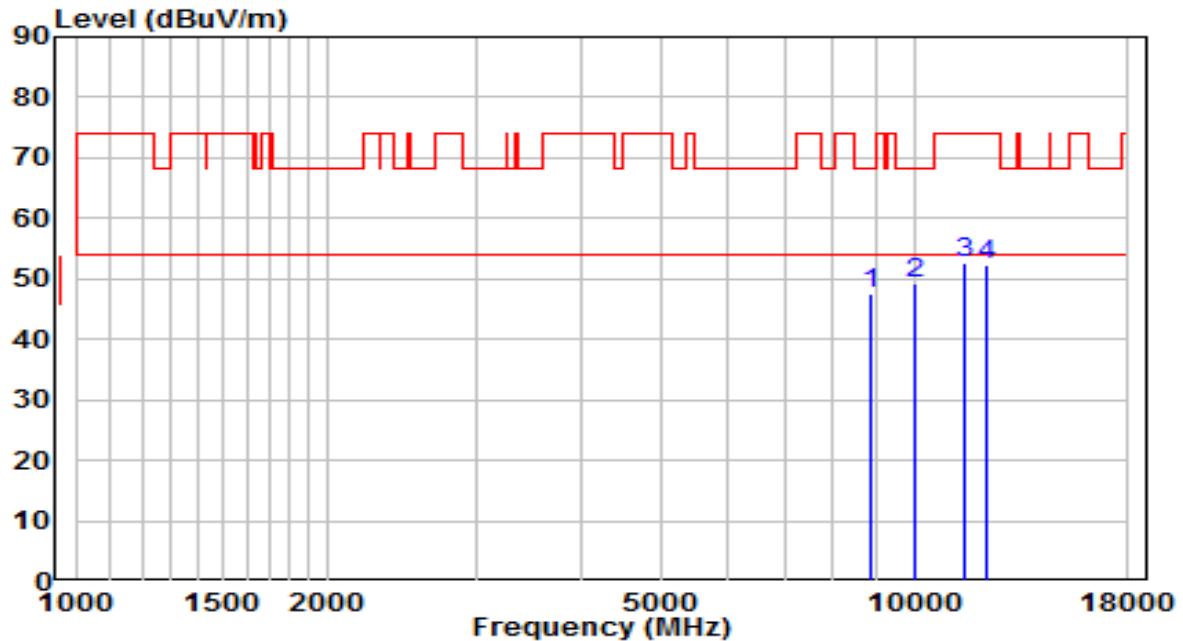


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8854.000	33.01	14.52	47.53	-20.67	68.20	Peak
2	* 10018.500	32.68	16.63	49.32	-18.88	68.20	Peak
3	11497.500	32.67	20.05	52.72	-21.28	74.00	Peak
4	12211.500	33.51	18.70	52.21	-21.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

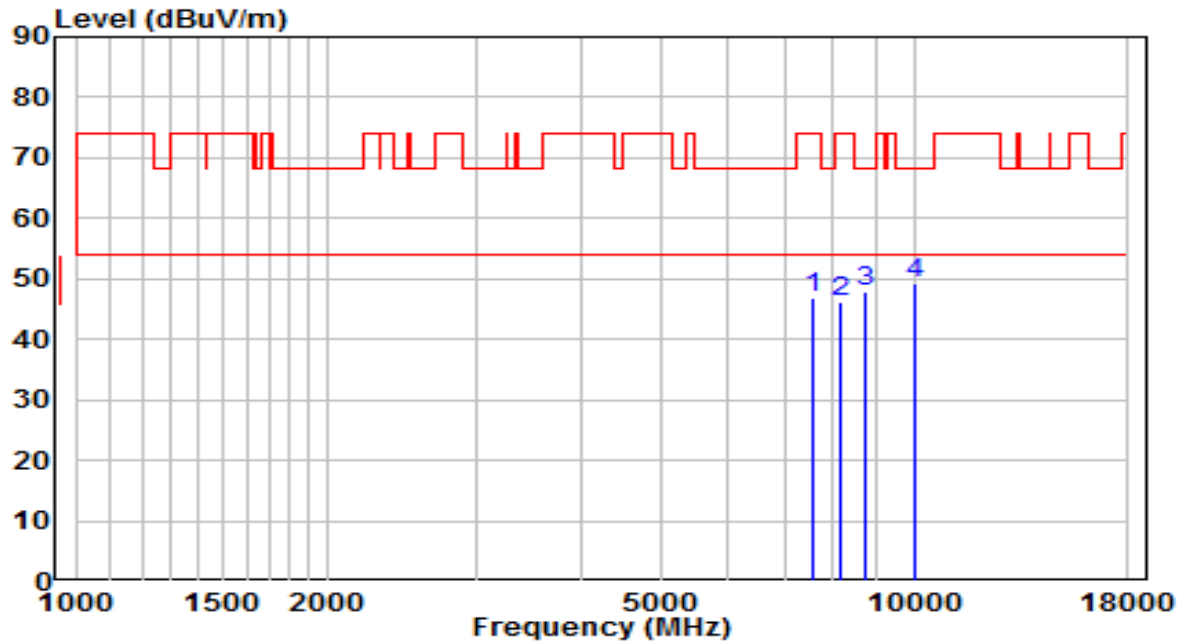


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7579.000	33.64	13.08	46.72	-27.28	74.00	Peak
2	8165.500	32.69	13.50	46.19	-27.81	74.00	Peak
3	8769.000	33.72	14.31	48.03	-20.17	68.20	Peak
4	* 10035.500	32.70	16.70	49.41	-18.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

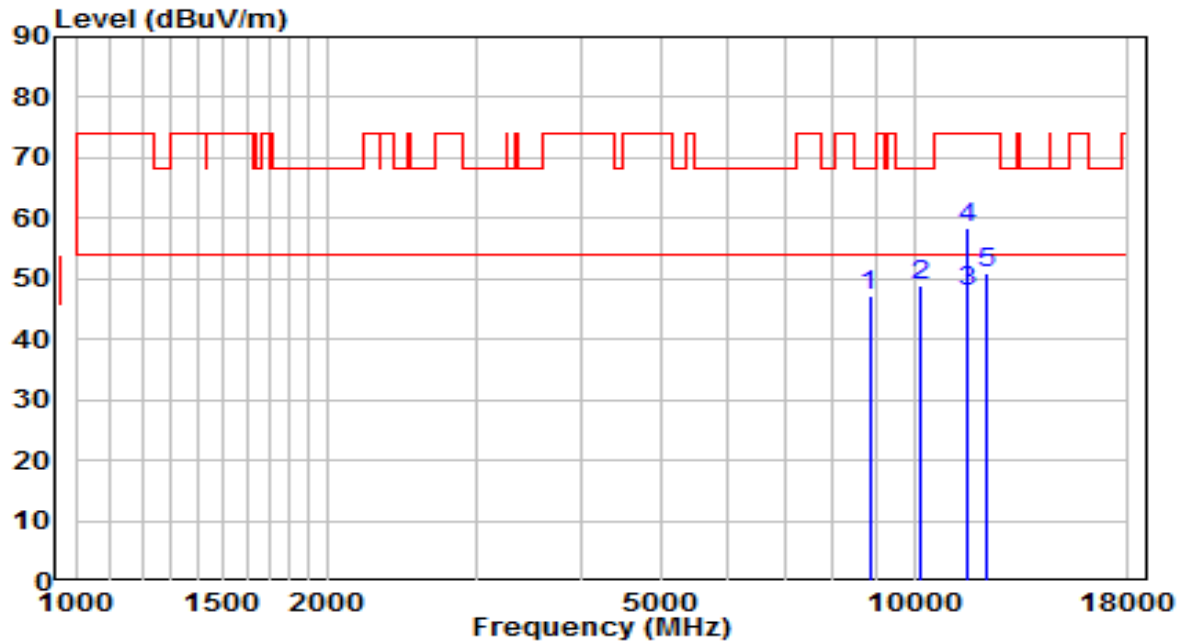


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8845.500	32.62	14.50	47.13	-21.07	68.20	Peak
2	10188.500	31.44	17.32	48.76	-19.44	68.20	Peak
3	* 11571.410	27.88	19.89	47.77	-6.23	54.00	Average
4	11574.000	38.40	19.88	58.28	-15.72	74.00	Peak
5	12211.500	32.35	18.70	51.05	-22.95	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

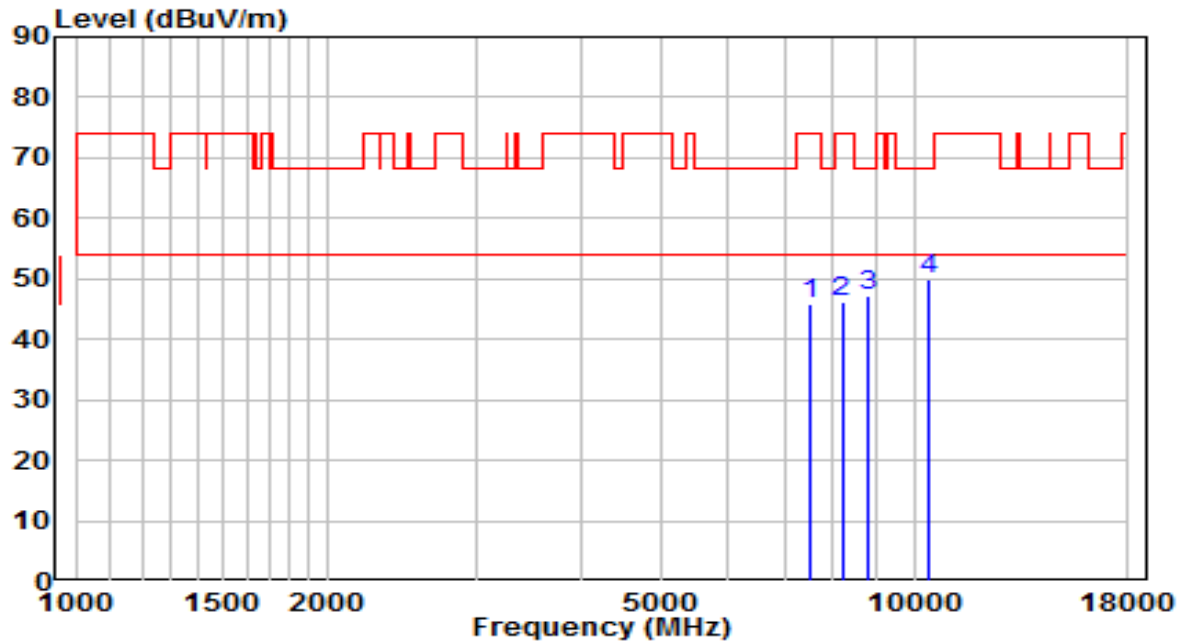


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	32.97	13.02	45.99	-28.01	74.00	Peak
2	8199.500	32.77	13.52	46.29	-27.71	74.00	Peak
3	8820.000	32.90	14.44	47.34	-20.86	68.20	Peak
4	* 10375.500	31.72	18.07	49.79	-18.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

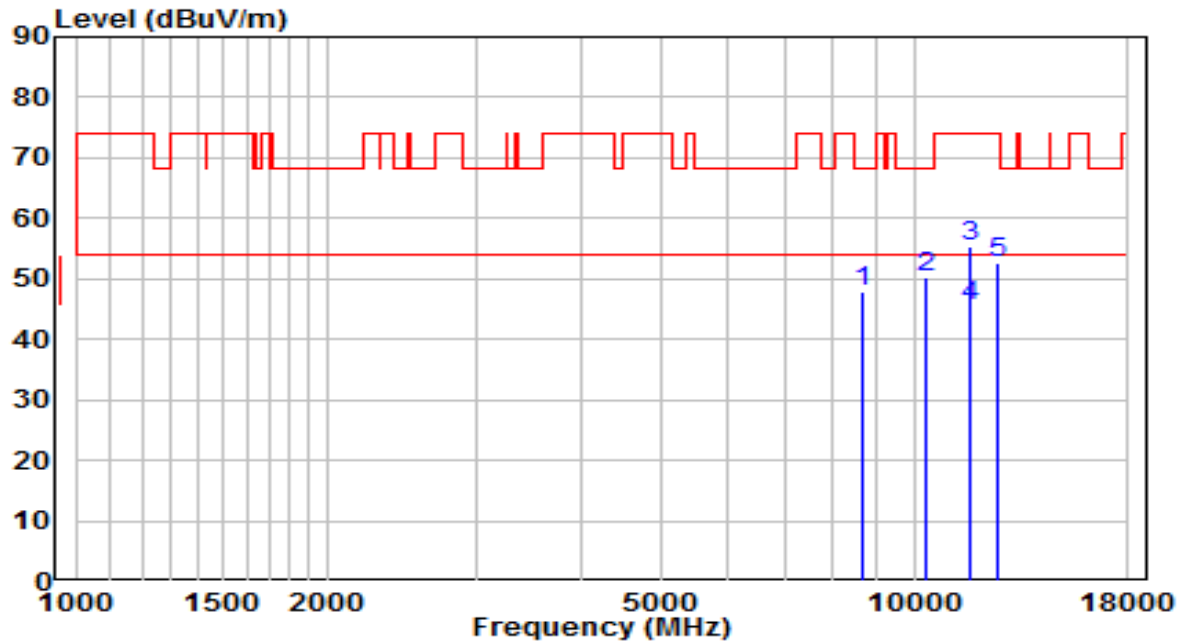


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8675.500	33.74	14.08	47.82	-20.38	68.20	Peak
2	10350.000	32.35	17.97	50.32	-17.88	68.20	Peak
3	11642.000	35.73	19.73	55.45	-18.55	74.00	Peak
4	* 11643.850	25.90	19.72	45.62	-8.38	54.00	Average
5	12619.500	33.87	18.76	52.63	-21.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

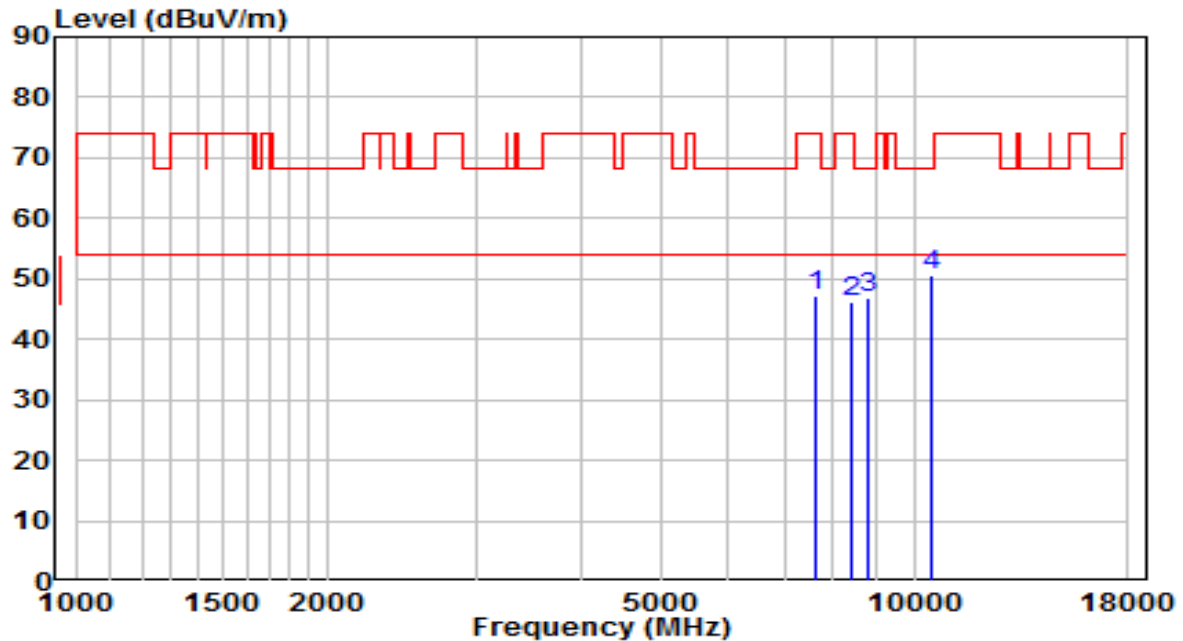


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	34.12	13.14	47.27	-26.73	74.00	Peak
2	8429.000	32.70	13.62	46.33	-27.67	74.00	Peak
3	8786.000	32.50	14.36	46.86	-21.34	68.20	Peak
4	* 10452.000	32.24	18.38	50.62	-17.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

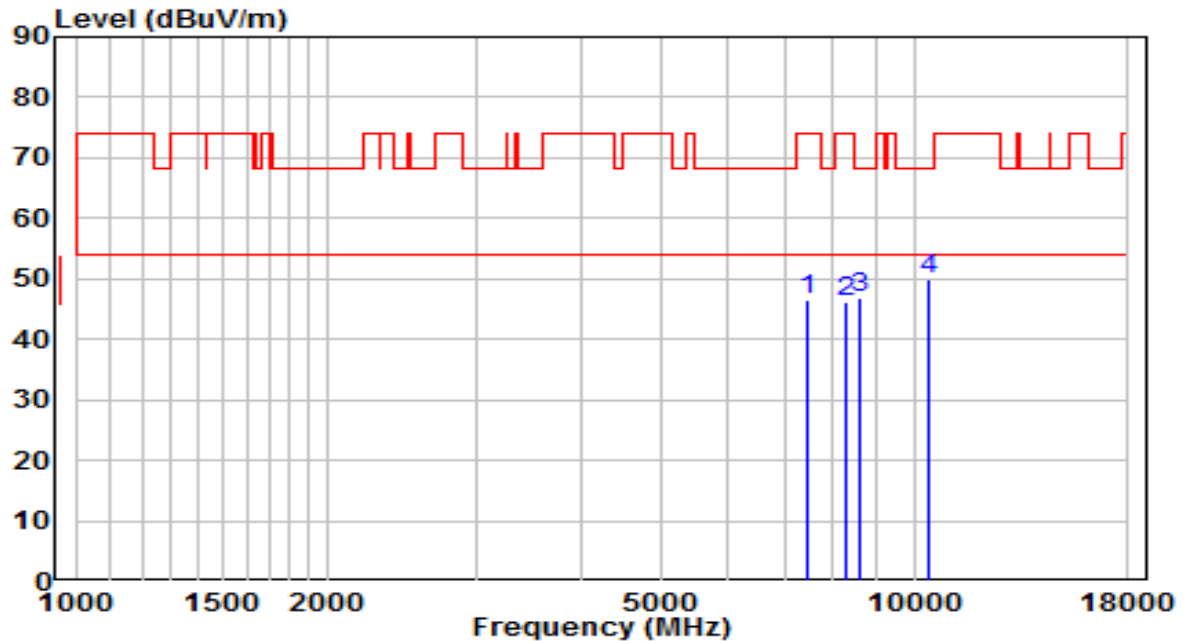


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	33.75	12.84	46.59	-27.41	74.00	Peak
2	8293.000	32.61	13.56	46.17	-27.83	74.00	Peak
3	8599.000	33.13	13.90	47.02	-21.18	68.20	Peak
4	* 10435.000	31.76	18.31	50.07	-18.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

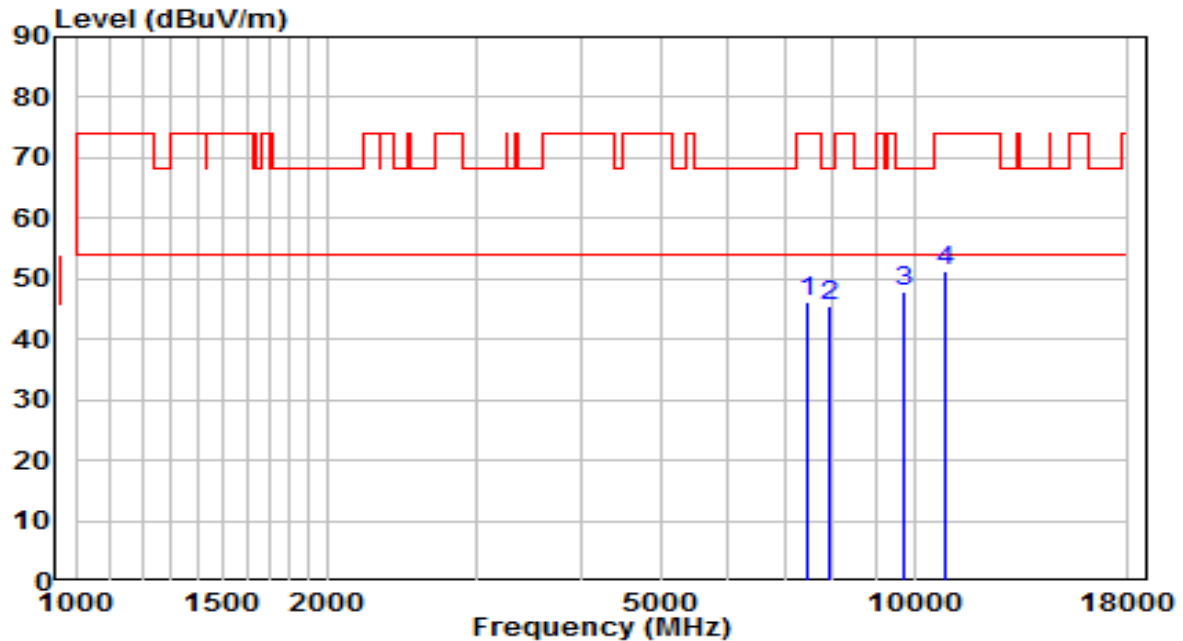


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	33.13	12.91	46.05	-27.95	74.00	Peak
2	7919.000	32.19	13.36	45.55	-22.65	68.20	Peak
3	* 9738.000	31.81	16.12	47.93	-20.27	68.20	Peak
4	10868.500	32.20	19.09	51.30	-22.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

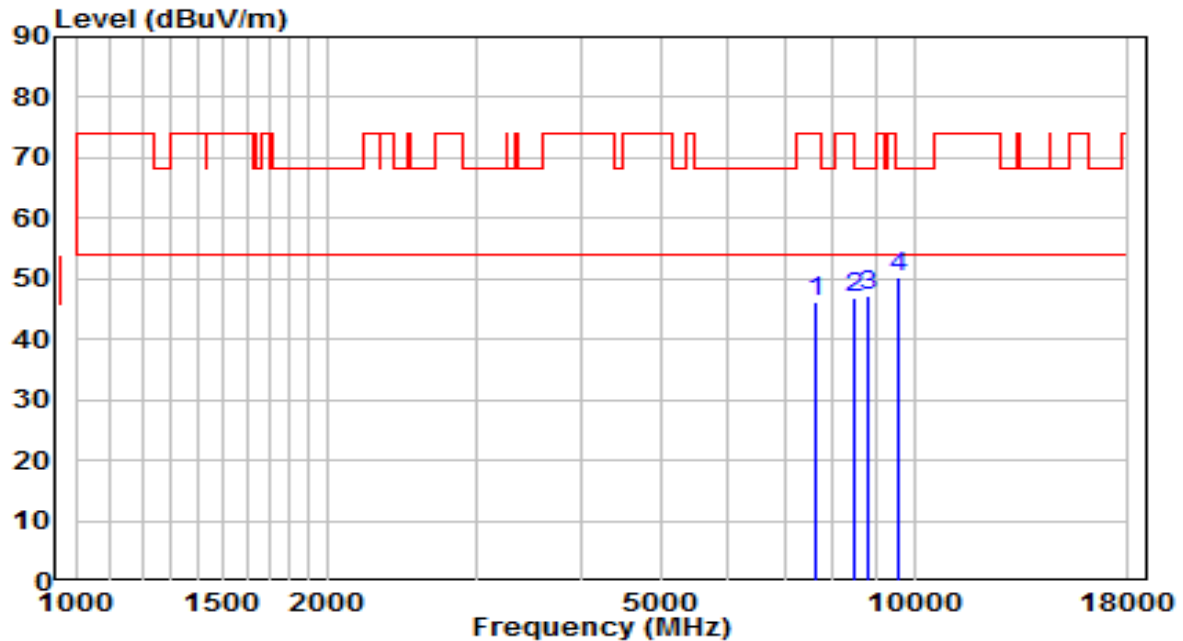


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	32.98	13.14	46.13	-27.87	74.00	Peak
2	8463.000	33.09	13.64	46.73	-27.27	74.00	Peak
3	8811.500	32.84	14.42	47.26	-20.94	68.20	Peak
4	* 9585.000	34.38	15.86	50.24	-17.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

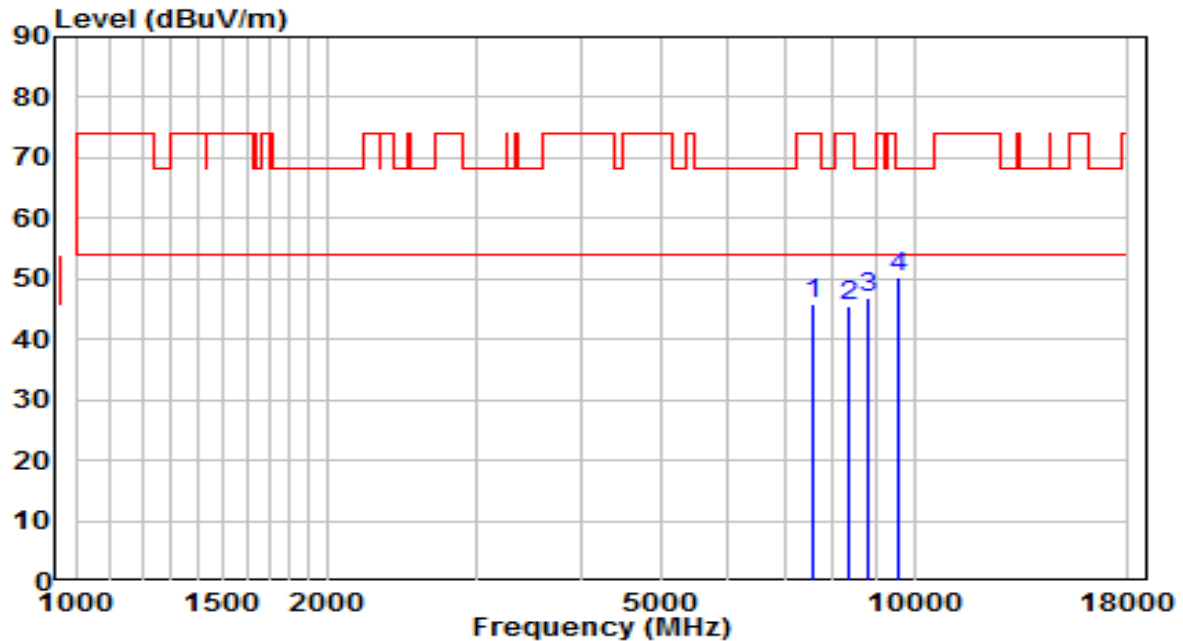


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	32.77	13.07	45.84	-28.16	74.00	Peak
2	8335.500	31.96	13.58	45.54	-28.46	74.00	Peak
3	8828.500	32.53	14.46	46.99	-21.21	68.20	Peak
4	* 9585.000	34.55	15.86	50.41	-17.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

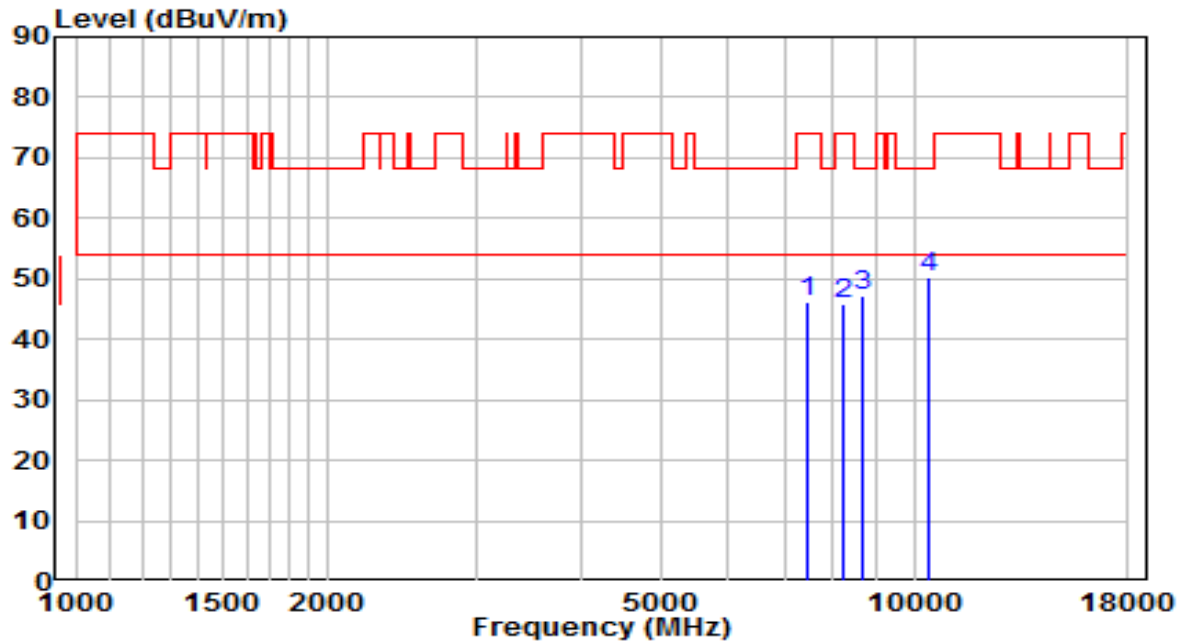


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7468.500	33.35	12.88	46.23	-27.77	74.00	Peak
2	8233.500	32.37	13.54	45.91	-28.09	74.00	Peak
3	8684.000	33.09	14.11	47.20	-21.00	68.20	Peak
4	* 10443.500	32.05	18.34	50.39	-17.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

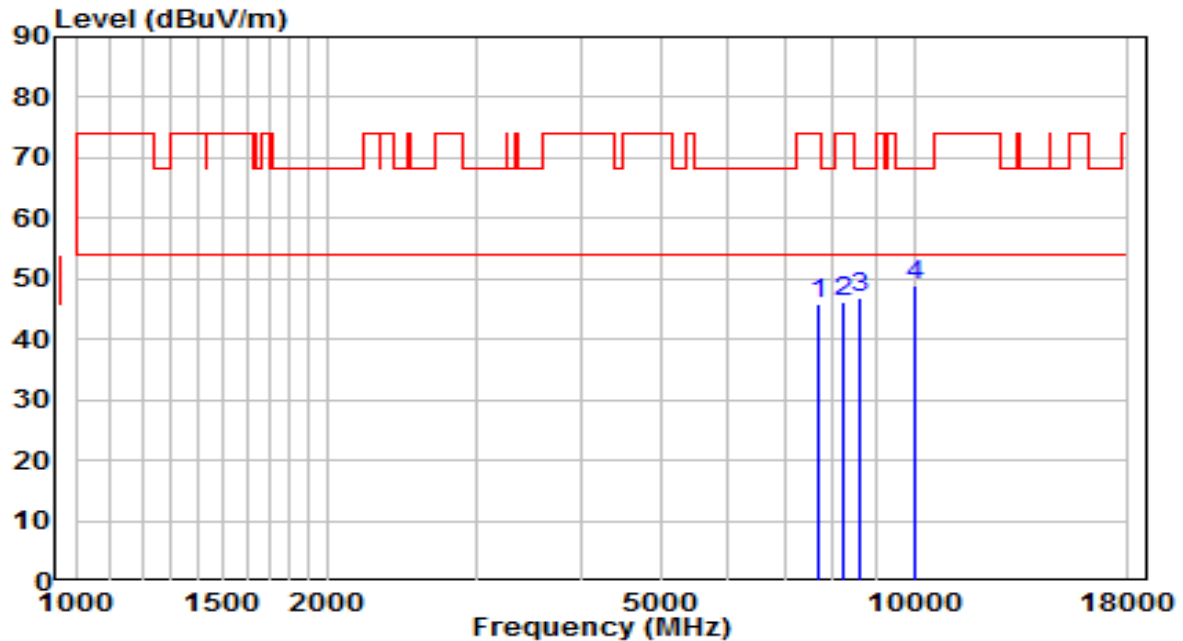


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7664.000	32.70	13.15	45.85	-28.15	74.00	Peak
2	8242.000	32.66	13.54	46.20	-27.80	74.00	Peak
3	8599.000	33.00	13.90	46.90	-21.30	68.20	Peak
4	* 10001.500	32.37	16.57	48.94	-19.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

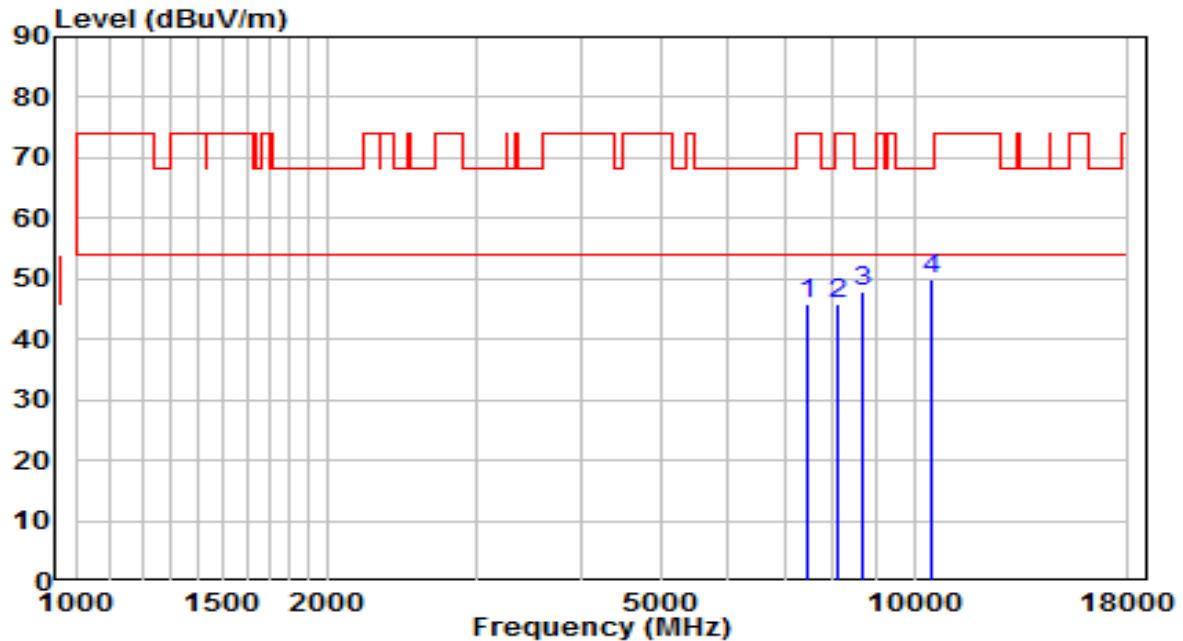


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7485.500	32.97	12.95	45.92	-28.08	74.00	Peak
2	8123.000	32.38	13.49	45.87	-28.13	74.00	Peak
3	8675.500	33.74	14.08	47.83	-20.37	68.20	Peak
4	* 10452.000	31.65	18.38	50.02	-18.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

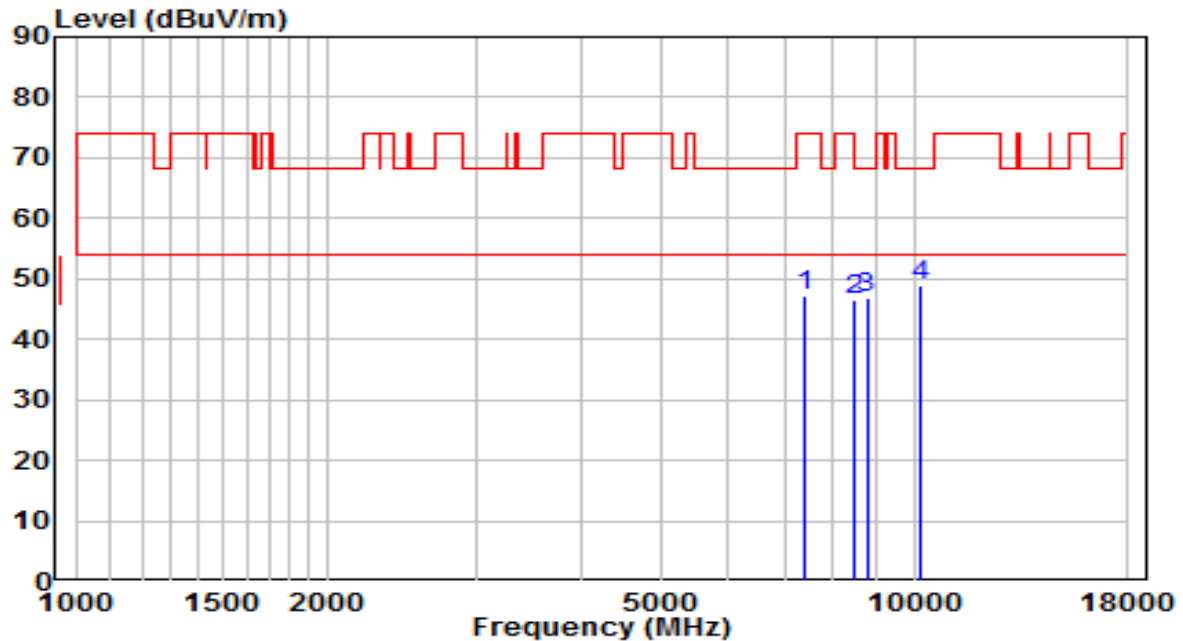


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7417.500	34.40	12.65	47.05	-26.95	74.00	Peak
2	8480.000	33.03	13.65	46.67	-27.33	74.00	Peak
3	8777.500	32.53	14.33	46.87	-21.33	68.20	Peak
4	* 10146.000	31.73	17.15	48.88	-19.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

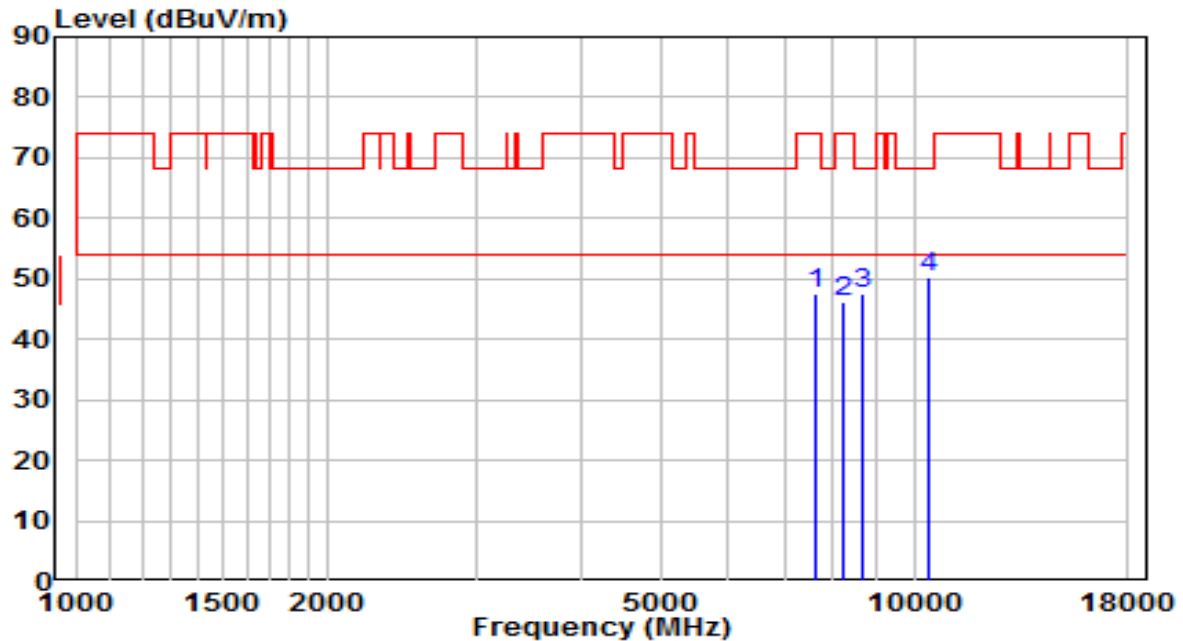


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	34.28	13.14	47.42	-26.58	74.00	Peak
2	8242.000	32.57	13.54	46.11	-27.89	74.00	Peak
3	8675.500	33.48	14.08	47.56	-20.64	68.20	Peak
4	* 10418.000	32.09	18.24	50.33	-17.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

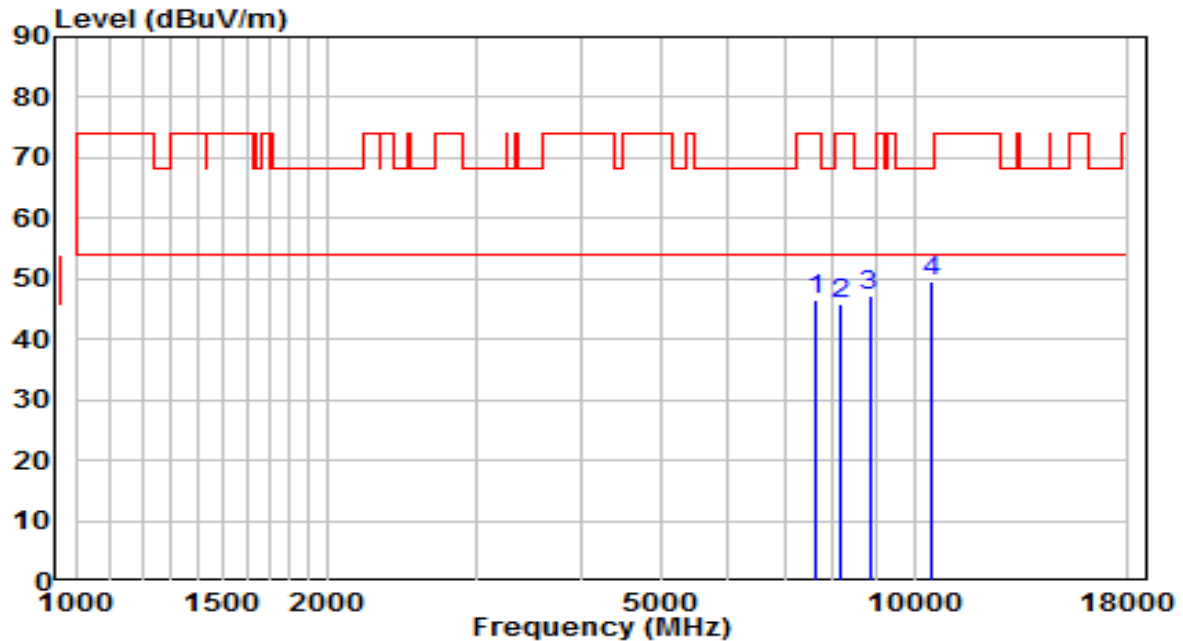


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.41	13.14	46.55	-27.45	74.00	Peak
2	8174.000	32.49	13.51	46.00	-28.00	74.00	Peak
3	8845.500	32.73	14.50	47.23	-20.97	68.20	Peak
4	* 10460.500	31.07	18.41	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

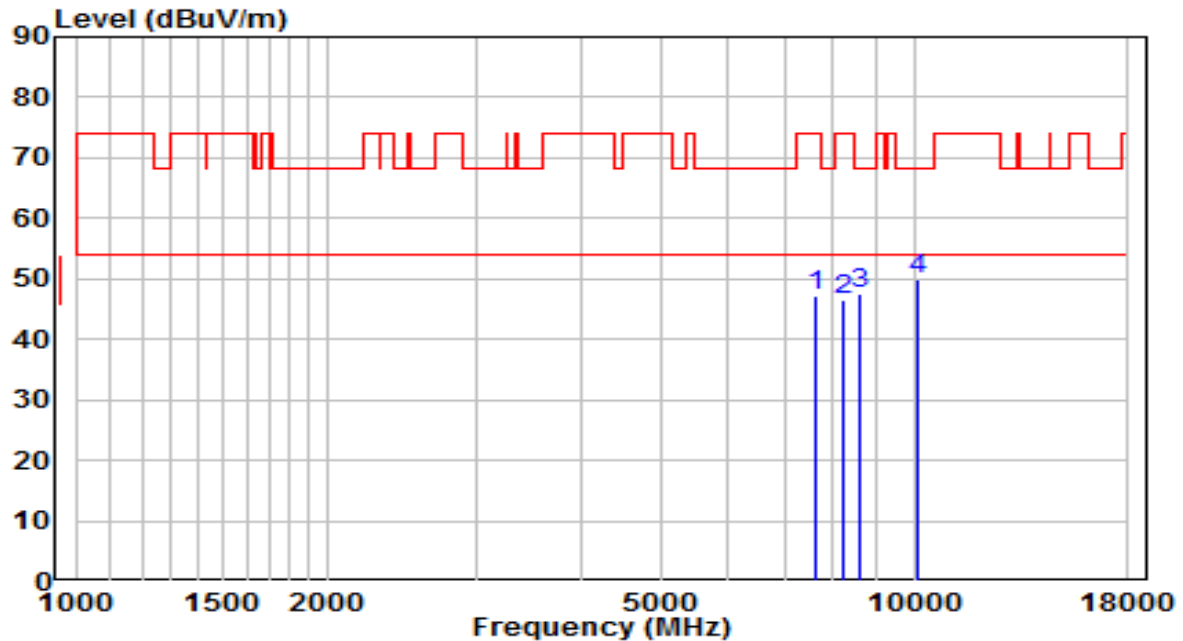


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	34.11	13.14	47.26	-26.74	74.00	Peak
2	8250.500	33.11	13.54	46.65	-27.35	74.00	Peak
3	8633.000	33.53	13.98	47.51	-20.69	68.20	Peak
4	* 10120.500	32.83	17.04	49.87	-18.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

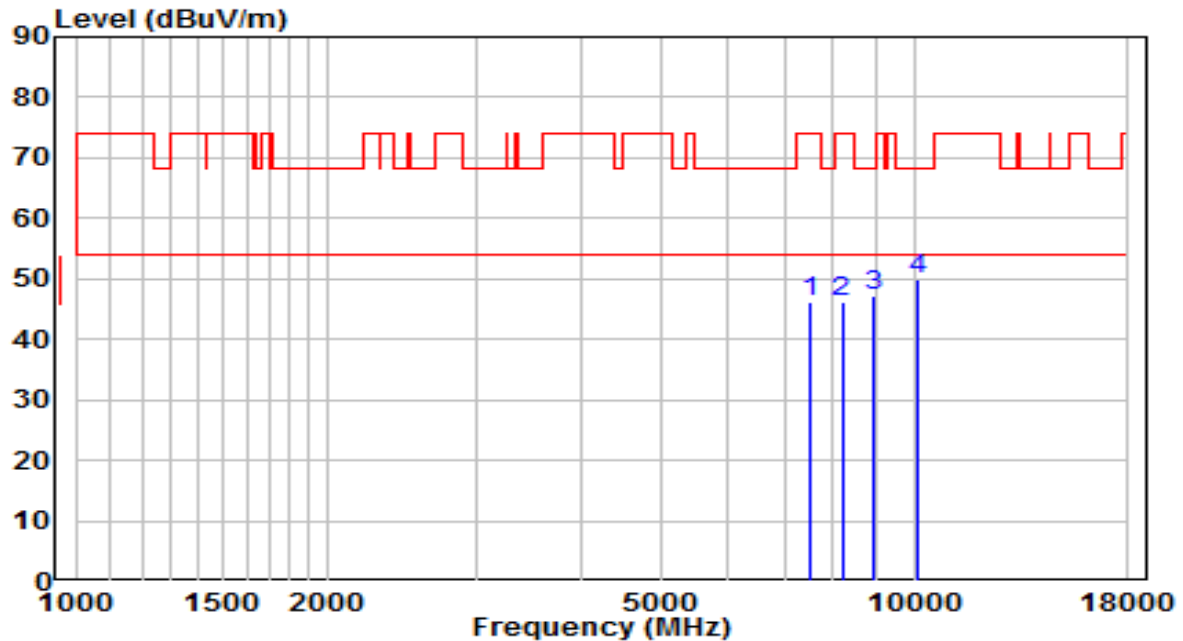


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	33.15	13.03	46.18	-27.82	74.00	Peak
2	8199.500	32.62	13.52	46.14	-27.86	74.00	Peak
3	8956.000	32.40	14.77	47.17	-21.03	68.20	Peak
4	* 10120.500	32.88	17.04	49.92	-18.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

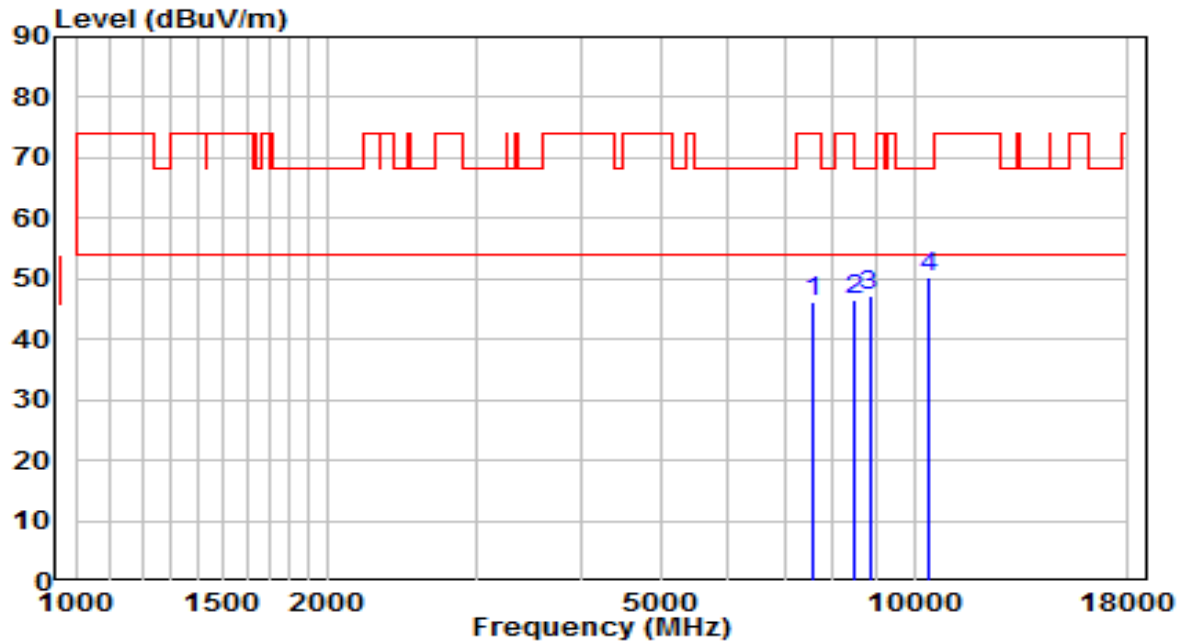


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7553.500	33.21	13.06	46.26	-27.74	74.00	Peak
2	8463.000	32.86	13.64	46.50	-27.50	74.00	Peak
3	8845.500	32.69	14.50	47.19	-21.01	68.20	Peak
4	* 10409.500	32.14	18.21	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

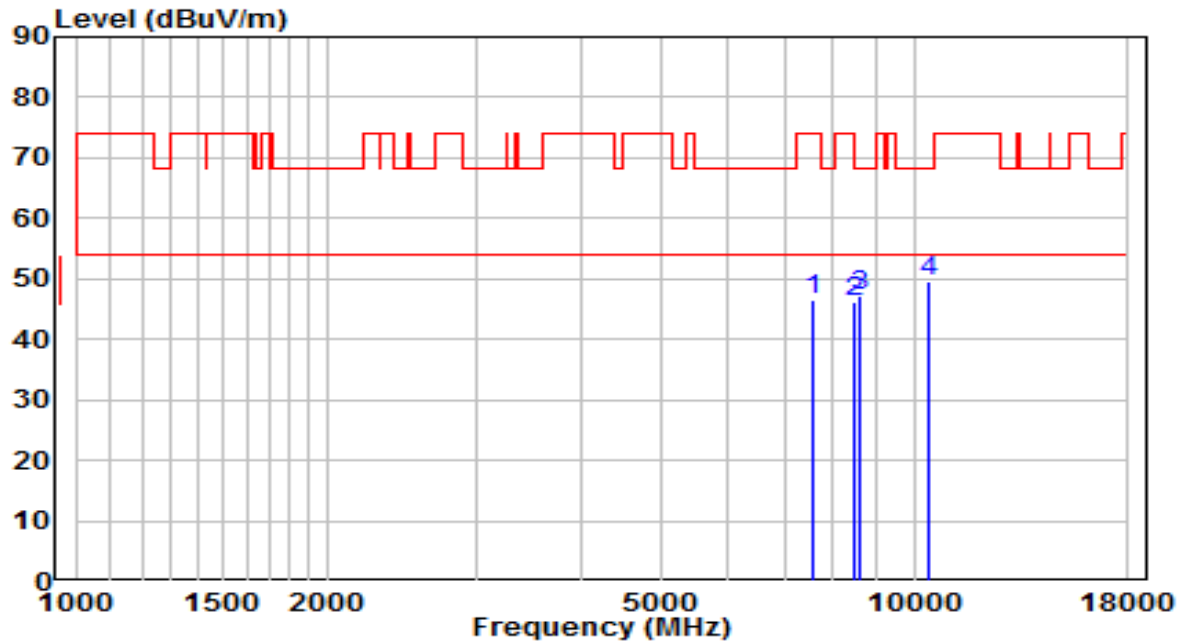


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7579.000	33.34	13.08	46.42	-27.58	74.00	Peak
2	8463.000	32.59	13.64	46.23	-27.77	74.00	Peak
3	8607.500	33.28	13.92	47.20	-21.00	68.20	Peak
4	* 10401.000	31.52	18.17	49.69	-18.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

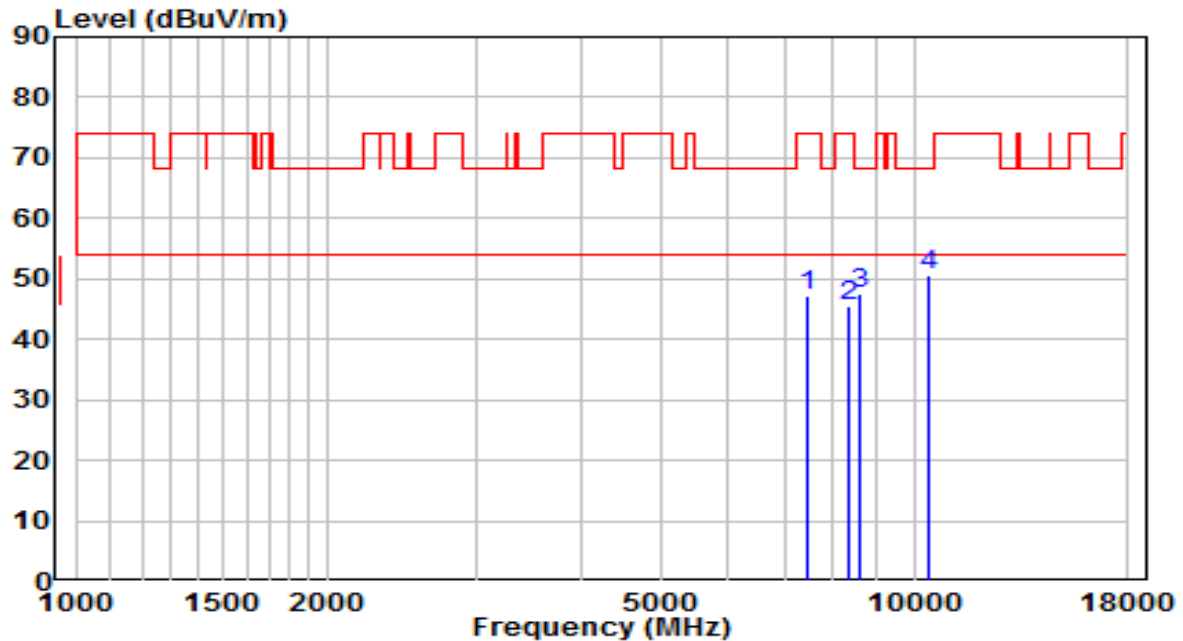


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	34.27	12.95	47.22	-26.78	74.00	Peak
2	8369.500	32.08	13.60	45.68	-28.32	74.00	Peak
3	8607.500	33.70	13.92	47.62	-20.58	68.20	Peak
4	* 10392.500	32.57	18.14	50.71	-17.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

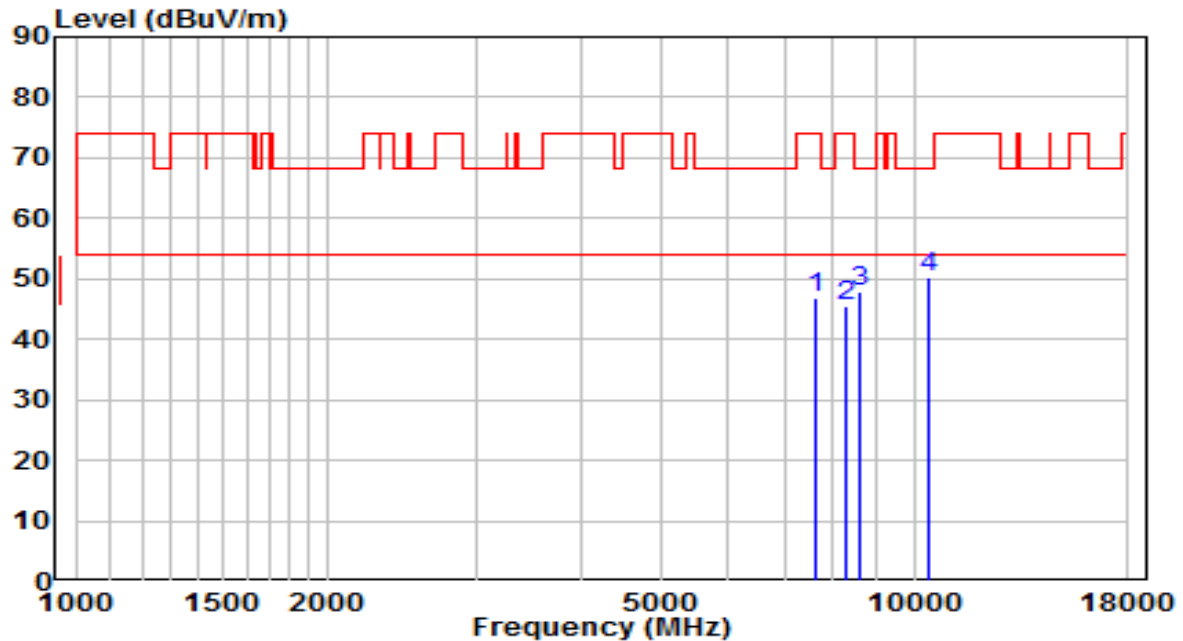


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.81	13.14	46.95	-27.05	74.00	Peak
2	8276.000	31.89	13.55	45.44	-28.56	74.00	Peak
3	8641.500	33.83	14.00	47.83	-20.37	68.20	Peak
4	* 10384.000	32.16	18.10	50.27	-17.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

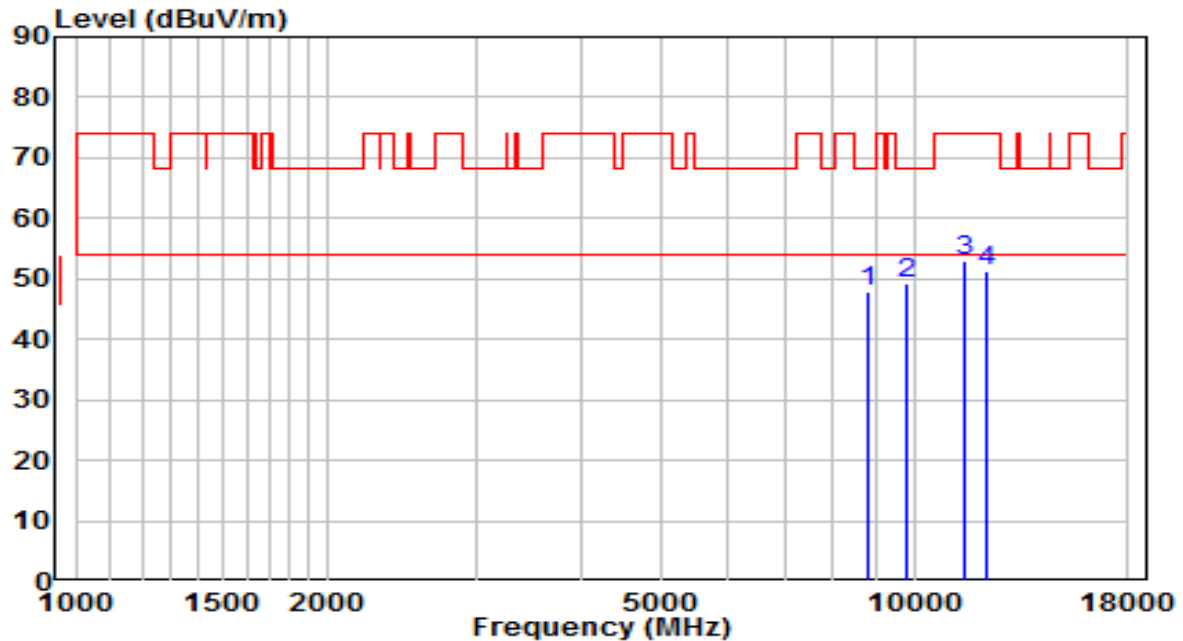


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8828.500	33.53	14.46	47.99	-20.21	68.20	Peak
2	* 9814.500	32.84	16.25	49.08	-19.12	68.20	Peak
3	11514.500	32.86	20.02	52.88	-21.12	74.00	Peak
4	12211.500	32.61	18.70	51.32	-22.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

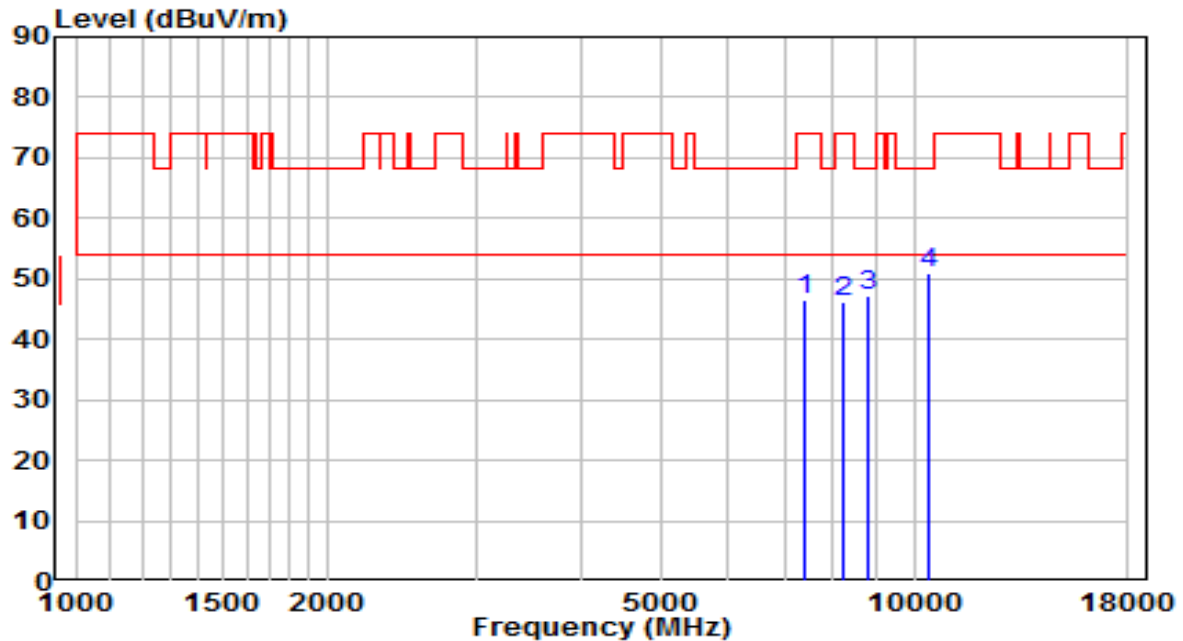


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	33.95	12.61	46.56	-27.44	74.00	Peak
2	8216.500	32.73	13.53	46.26	-27.74	74.00	Peak
3	8786.000	32.70	14.36	47.06	-21.14	68.20	Peak
4	* 10443.500	32.58	18.34	50.93	-17.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

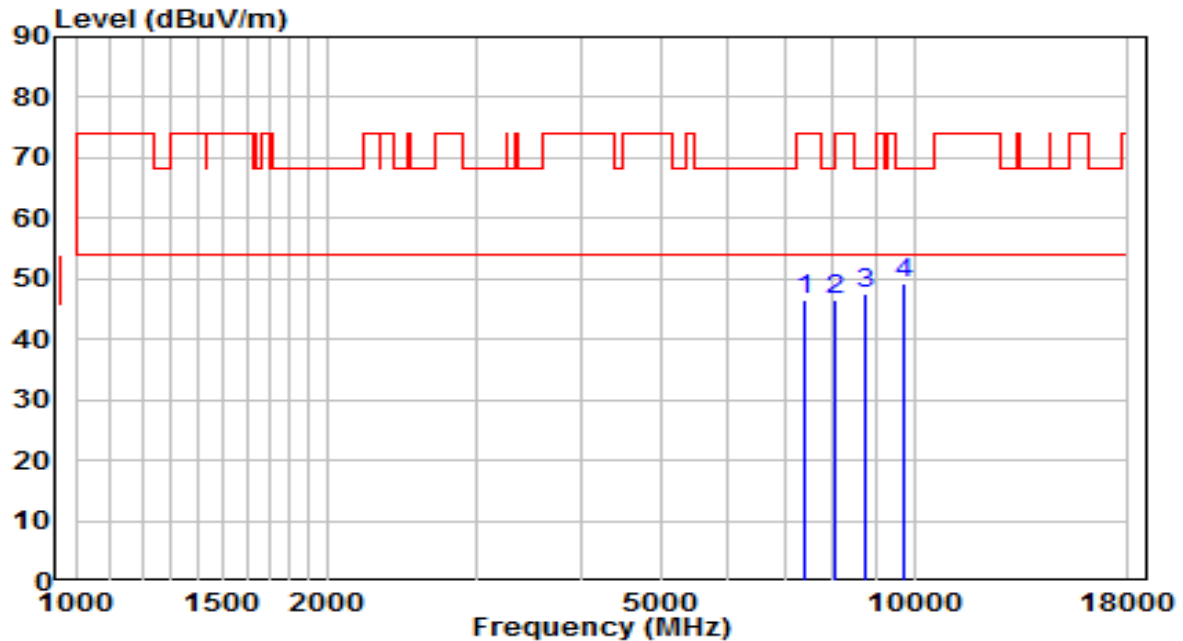


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7409.000	34.07	12.61	46.68	-27.32	74.00	Peak
2	8046.500	32.97	13.45	46.42	-27.58	74.00	Peak
3	8726.500	33.37	14.21	47.58	-20.62	68.20	Peak
4	* 9738.000	33.07	16.12	49.19	-19.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

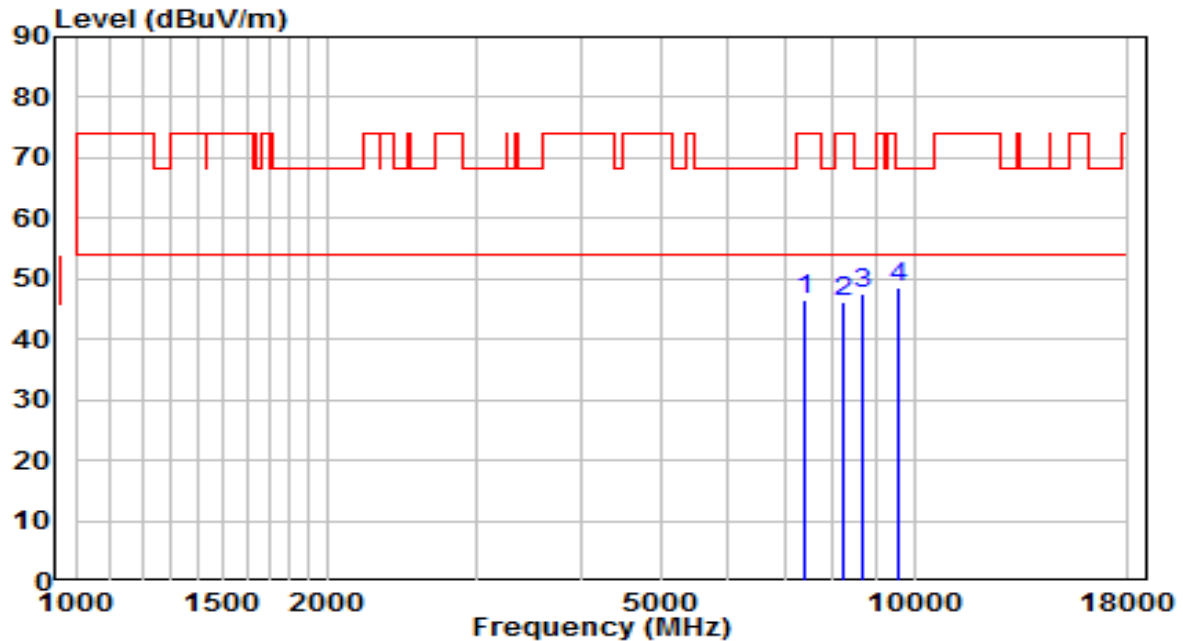


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7426.000	33.75	12.69	46.44	-27.56	74.00	Peak
2	8259.000	32.62	13.55	46.16	-27.84	74.00	Peak
3	8684.000	33.34	14.11	47.44	-20.76	68.20	Peak
4	* 9593.500	32.70	15.88	48.57	-19.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

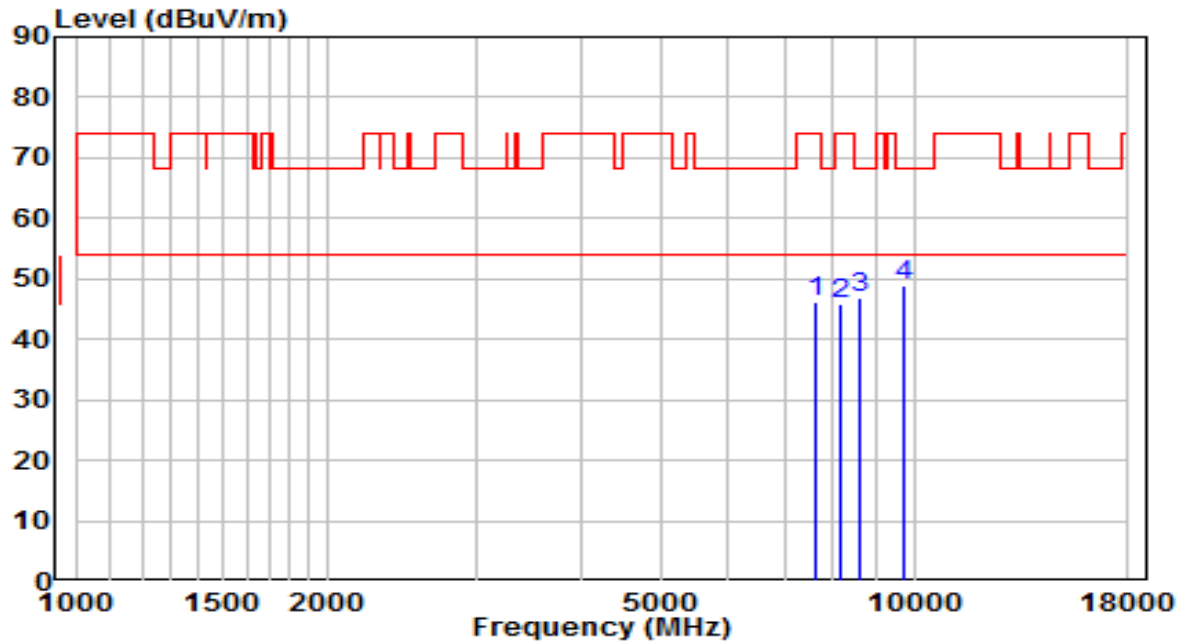


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	33.01	13.13	46.14	-27.86	74.00	Peak
2	8157.000	32.30	13.50	45.80	-28.20	74.00	Peak
3	8616.000	32.79	13.94	46.72	-21.48	68.20	Peak
4	* 9746.500	32.82	16.13	48.95	-19.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

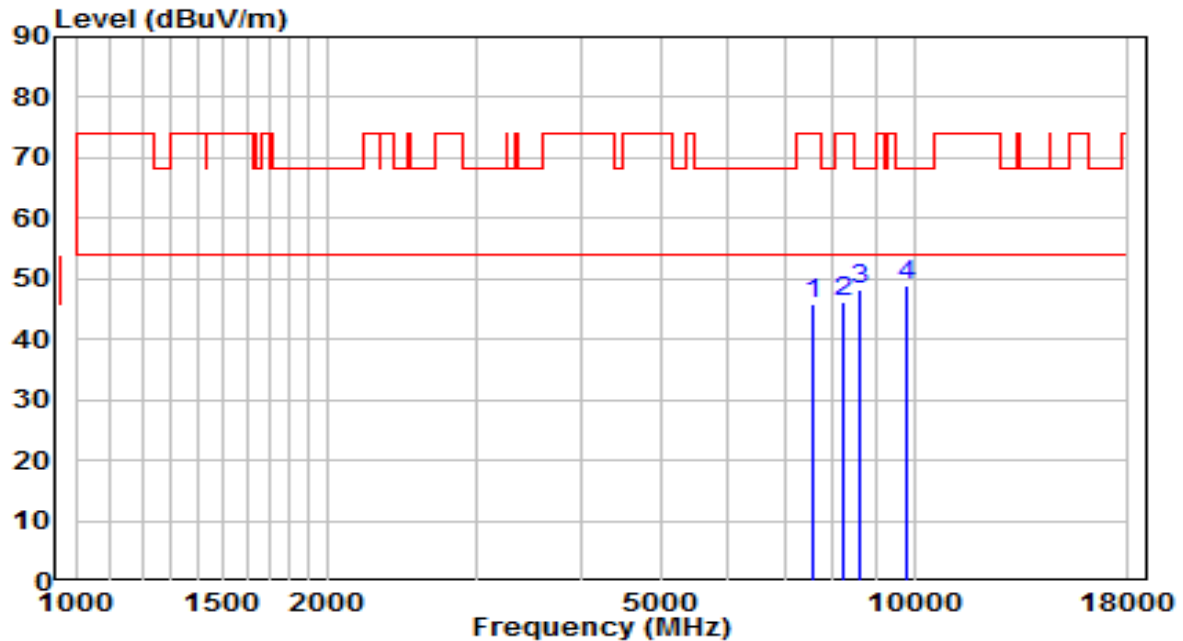


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	32.59	13.09	45.69	-28.31	74.00	Peak
2	8250.500	32.60	13.54	46.14	-27.86	74.00	Peak
3	8633.000	34.20	13.98	48.18	-20.02	68.20	Peak
4	* 9763.500	32.86	16.16	49.02	-19.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

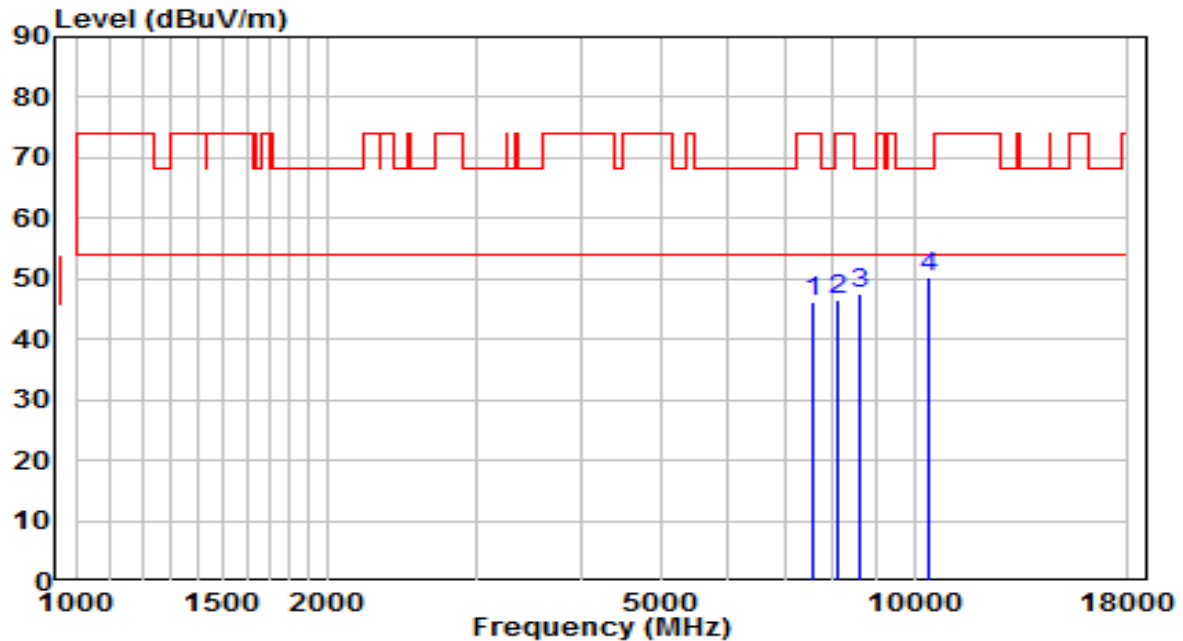


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7596.000	33.15	13.09	46.24	-27.76	74.00	Peak
2	8123.000	32.92	13.49	46.40	-27.60	74.00	Peak
3	8607.500	33.76	13.92	47.68	-20.52	68.20	Peak
4	* 10401.000	31.92	18.17	50.10	-18.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

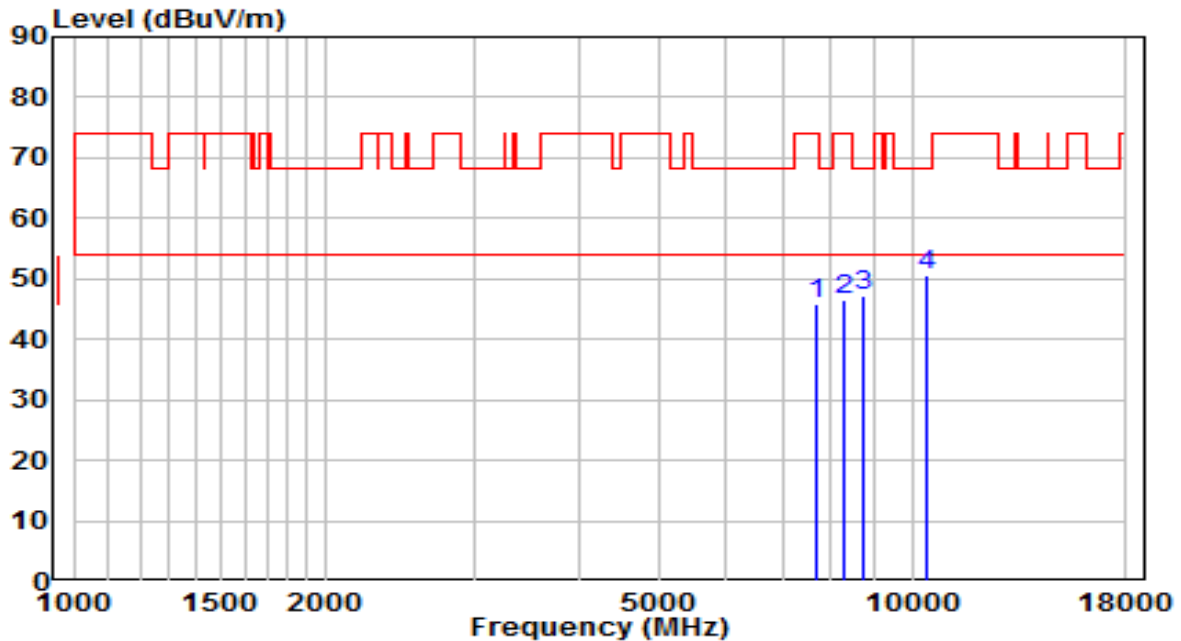


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	32.55	13.17	45.71	-28.29	74.00	Peak
2	8267.500	32.96	13.55	46.51	-27.49	74.00	Peak
3	8769.000	32.95	14.31	47.26	-20.94	68.20	Peak
4	* 10418.000	32.45	18.24	50.69	-17.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

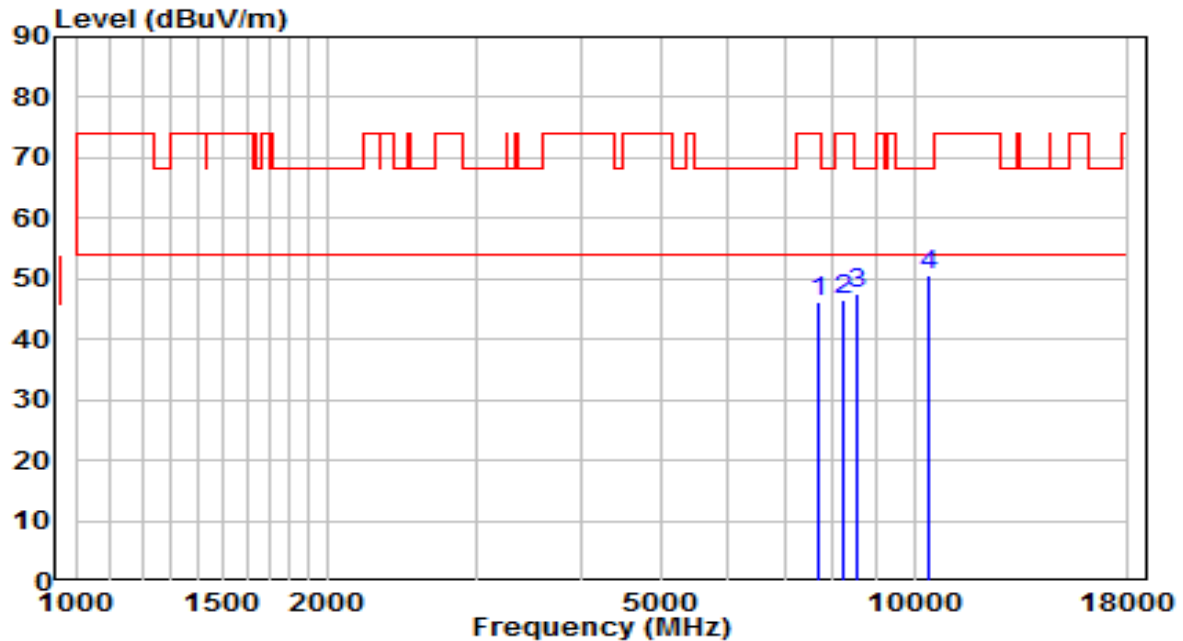


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7681.000	32.99	13.17	46.16	-27.84	74.00	Peak
2	8259.000	32.86	13.55	46.40	-27.60	74.00	Peak
3	8556.500	33.59	13.79	47.38	-20.82	68.20	Peak
4	* 10426.500	32.31	18.27	50.58	-17.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

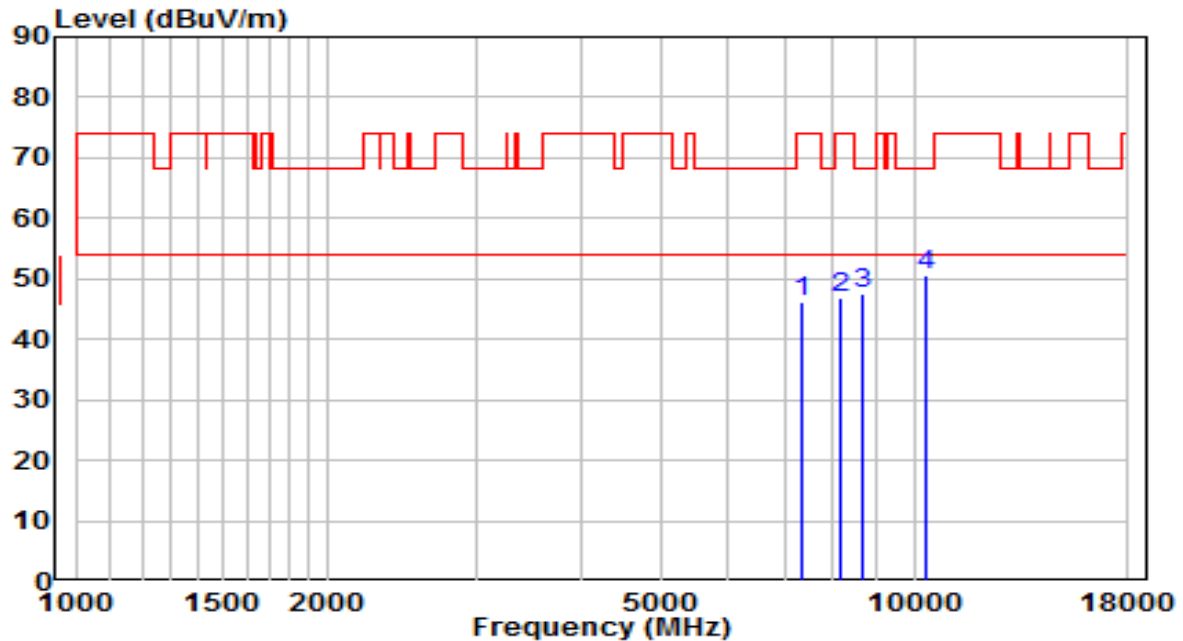


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7349.500	33.81	12.35	46.16	-27.84	74.00	Peak
2	8140.000	33.51	13.49	47.00	-27.00	74.00	Peak
3	8684.000	33.30	14.11	47.40	-20.80	68.20	Peak
4	* 10350.000	32.67	17.97	50.64	-17.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

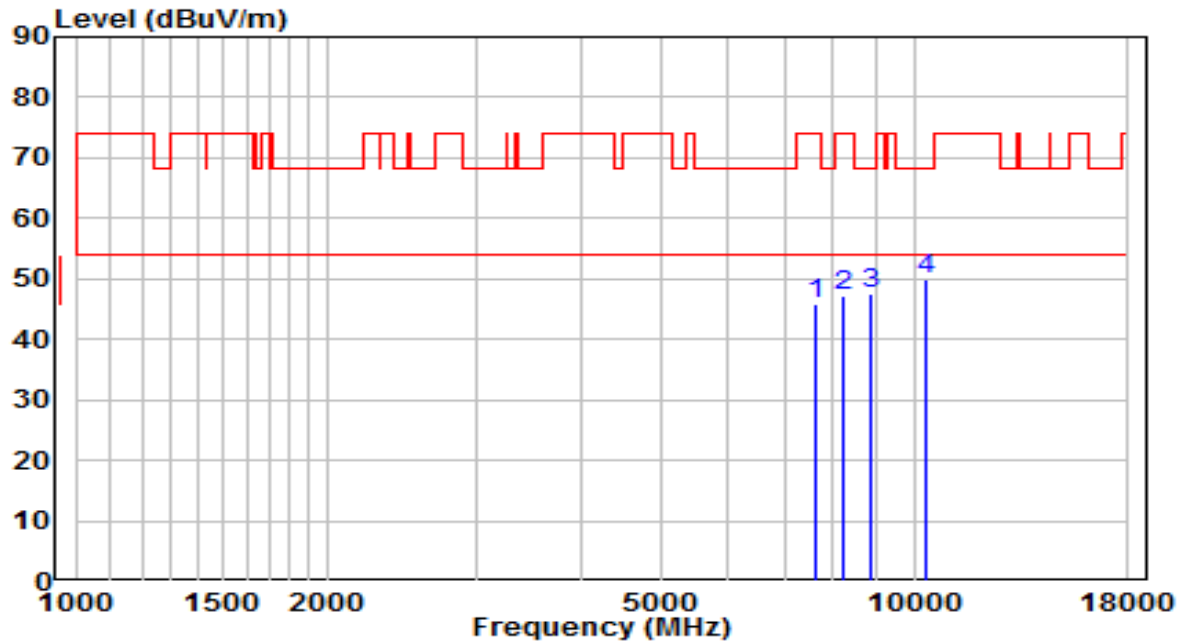


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	32.84	13.14	45.98	-28.02	74.00	Peak
2	8242.000	33.56	13.54	47.09	-26.91	74.00	Peak
3	8879.500	33.04	14.58	47.62	-20.58	68.20	Peak
4	* 10358.500	31.86	18.00	49.86	-18.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

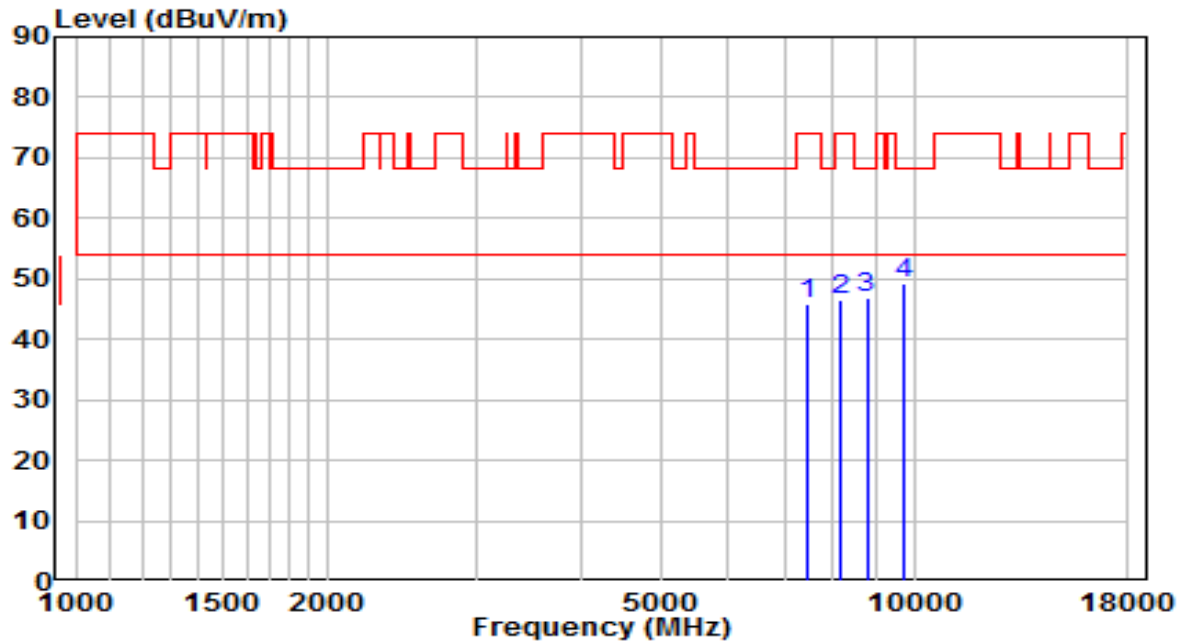


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7468.500	33.12	12.88	45.99	-28.01	74.00	Peak
2	8165.500	33.18	13.50	46.69	-27.31	74.00	Peak
3	8777.500	32.67	14.33	47.00	-21.20	68.20	Peak
4	* 9755.000	33.05	16.15	49.20	-19.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

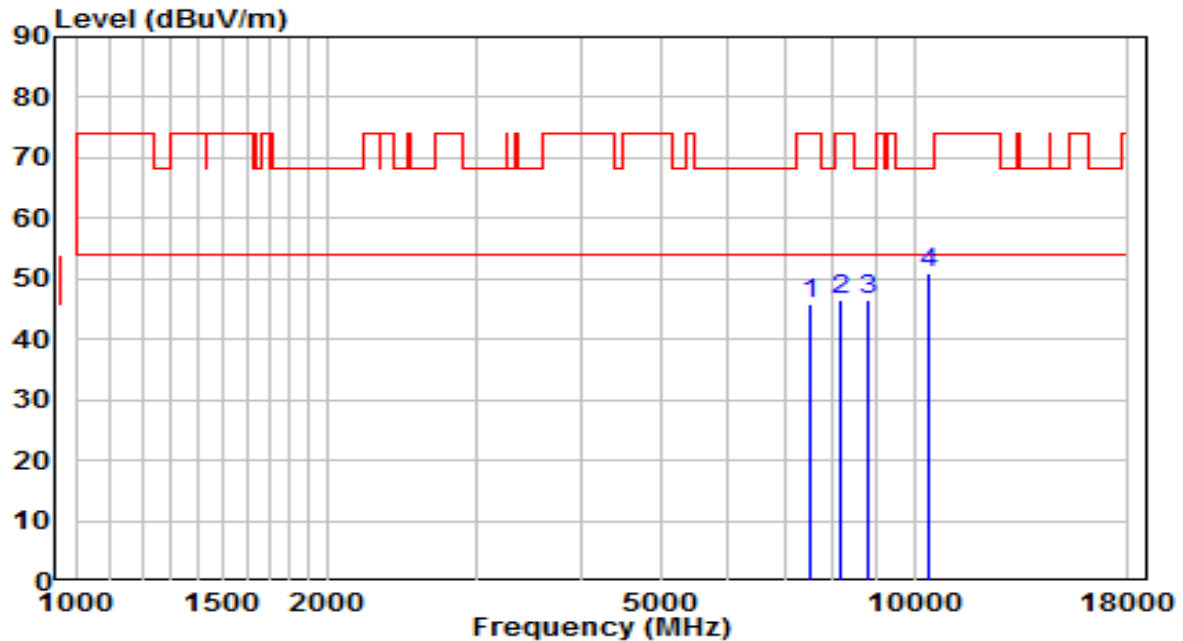


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	32.97	13.02	45.98	-28.02	74.00	Peak
2	8182.500	32.99	13.51	46.50	-27.50	74.00	Peak
3	8794.500	32.30	14.38	46.68	-21.52	68.20	Peak
4	* 10409.500	32.72	18.21	50.93	-17.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

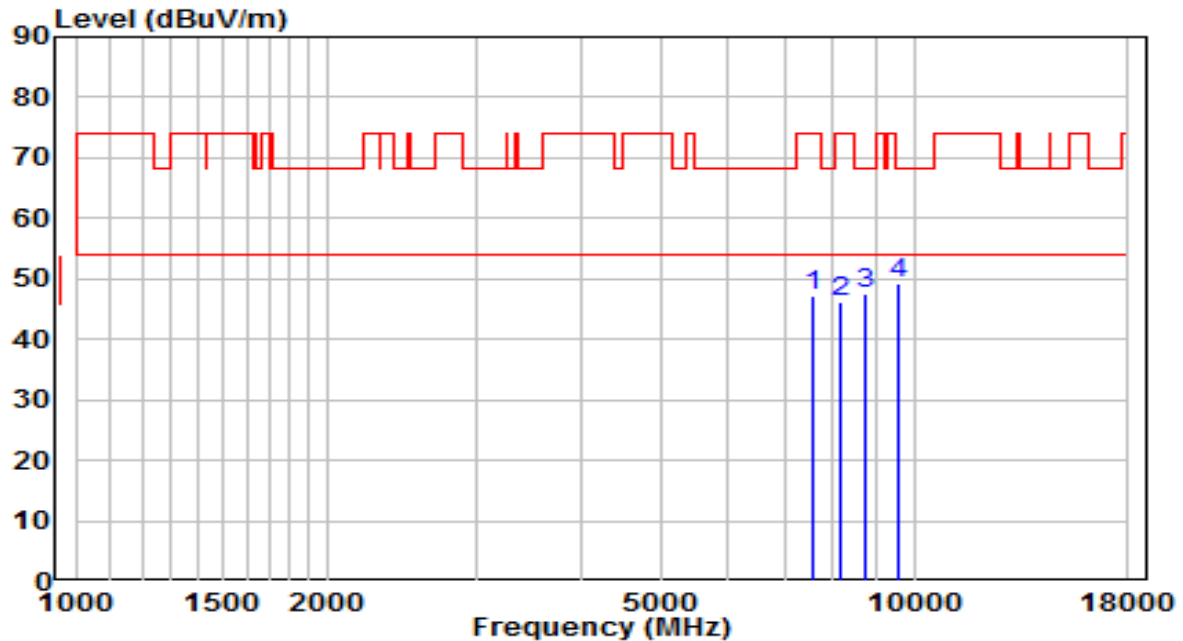


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7579.000	34.11	13.08	47.19	-26.81	74.00	Peak
2	8148.500	32.81	13.50	46.31	-27.69	74.00	Peak
3	8752.000	33.29	14.27	47.56	-20.64	68.20	Peak
4	* 9610.500	33.44	15.91	49.35	-18.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

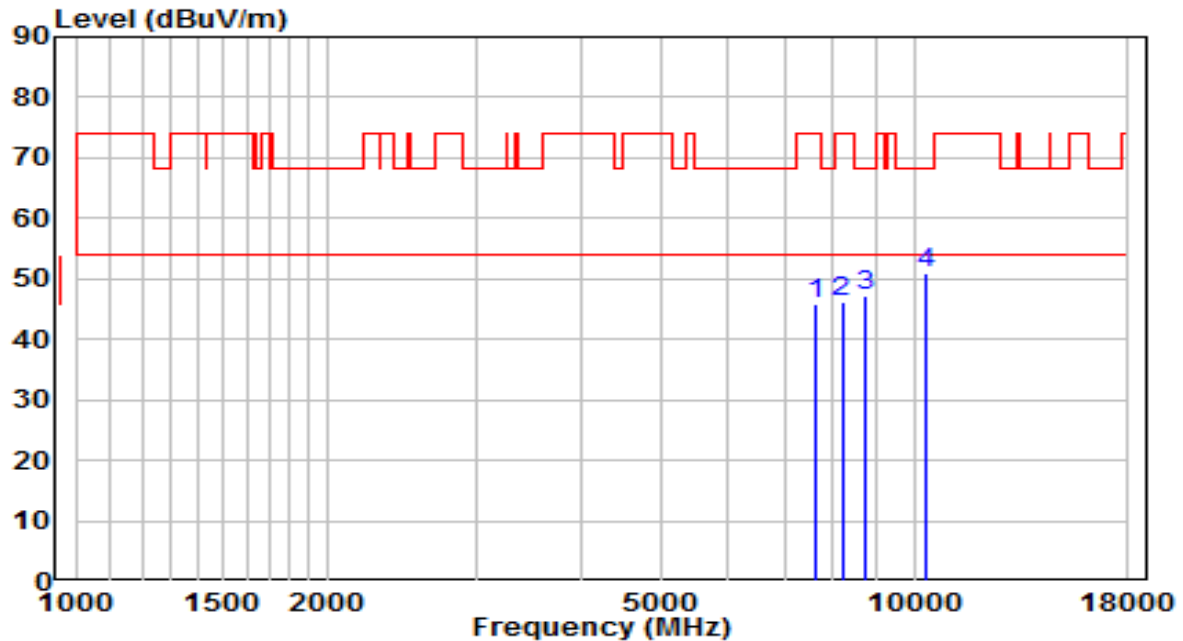


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	32.81	13.12	45.94	-28.06	74.00	Peak
2	8199.500	32.72	13.52	46.24	-27.76	74.00	Peak
3	8769.000	32.86	14.31	47.18	-21.02	68.20	Peak
4	* 10358.500	32.91	18.00	50.91	-17.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	AC 120V/60Hz

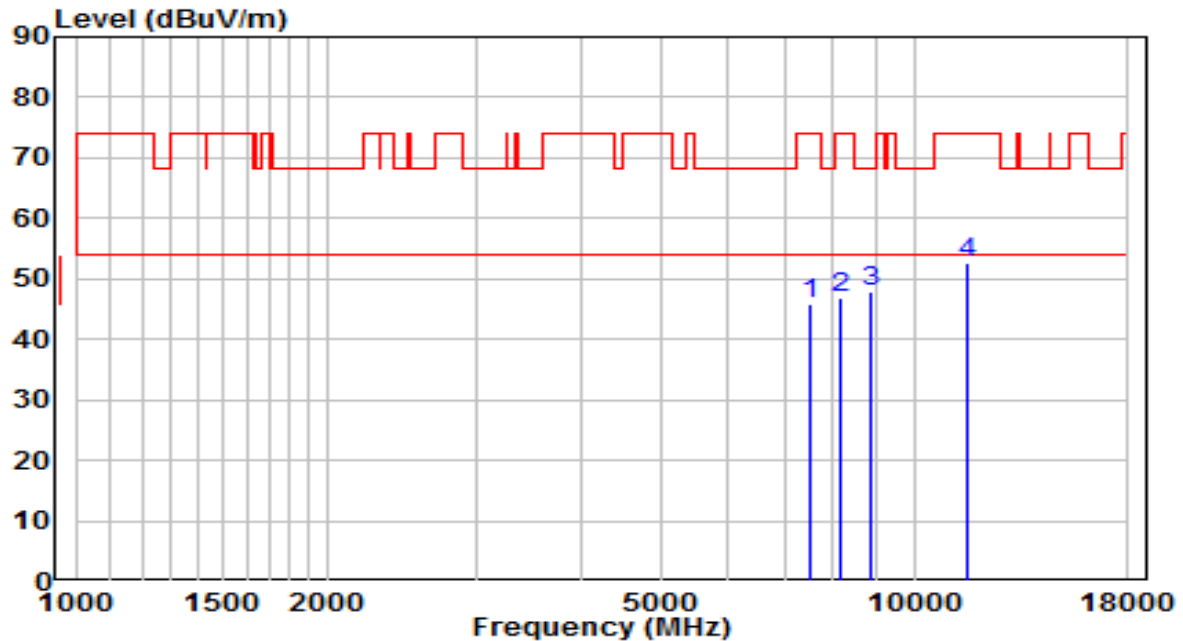


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7502.500	32.96	13.02	45.97	-28.03	74.00	Peak
2	8174.000	33.53	13.51	47.03	-26.97	74.00	Peak
3	* 8854.000	33.45	14.52	47.97	-20.23	68.20	Peak
4	11582.500	32.86	19.86	52.72	-21.28	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	AC 120V/60Hz

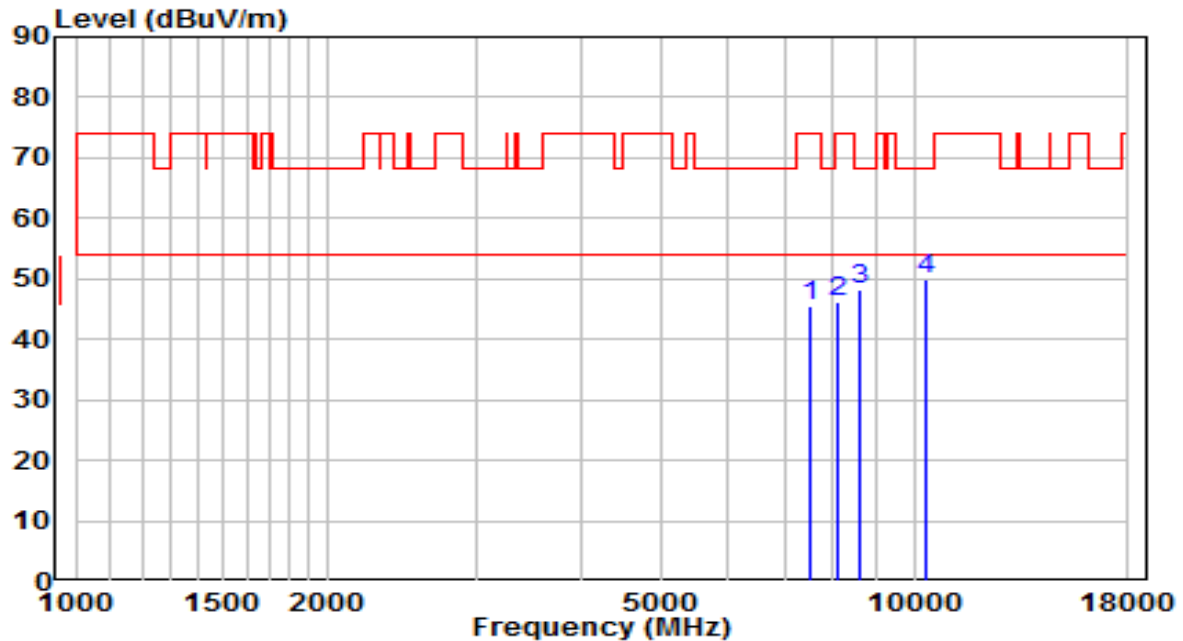


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	32.67	12.99	45.66	-28.34	74.00	Peak
2	8114.500	32.80	13.48	46.28	-27.72	74.00	Peak
3	8599.000	34.23	13.90	48.13	-20.07	68.20	Peak
4	* 10367.000	31.82	18.04	49.85	-18.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	AC 120V/60Hz

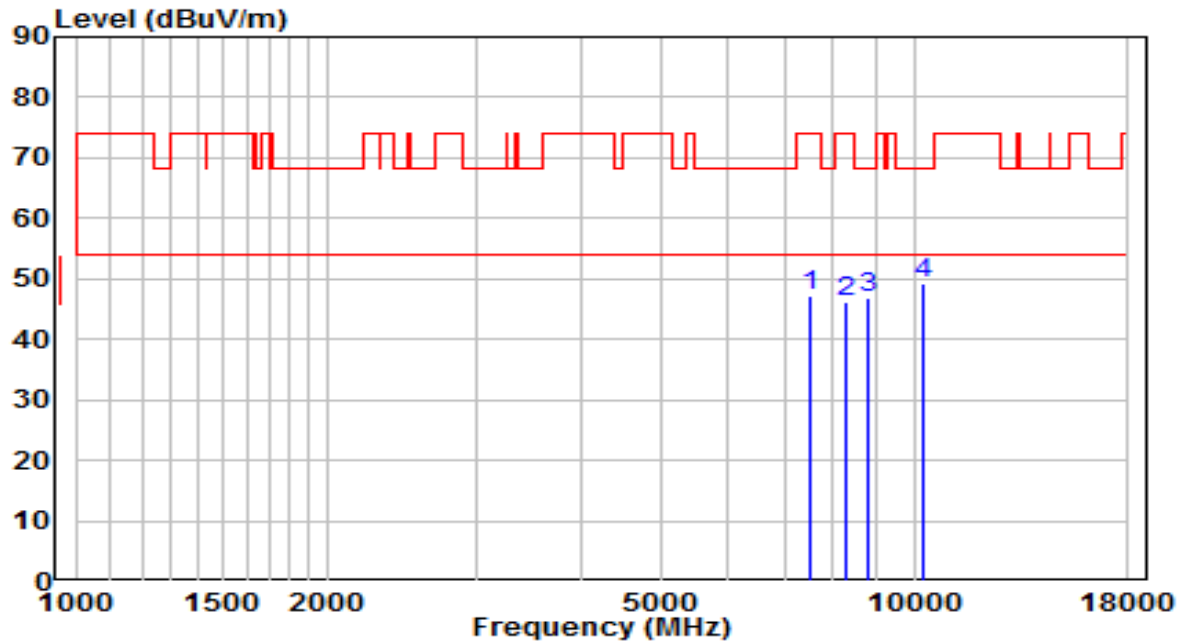


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	34.19	13.05	47.24	-26.76	74.00	Peak
2	8267.500	32.60	13.55	46.15	-27.85	74.00	Peak
3	8820.000	32.49	14.44	46.93	-21.27	68.20	Peak
4	* 10256.500	31.62	17.59	49.21	-18.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	AC 120V/60Hz

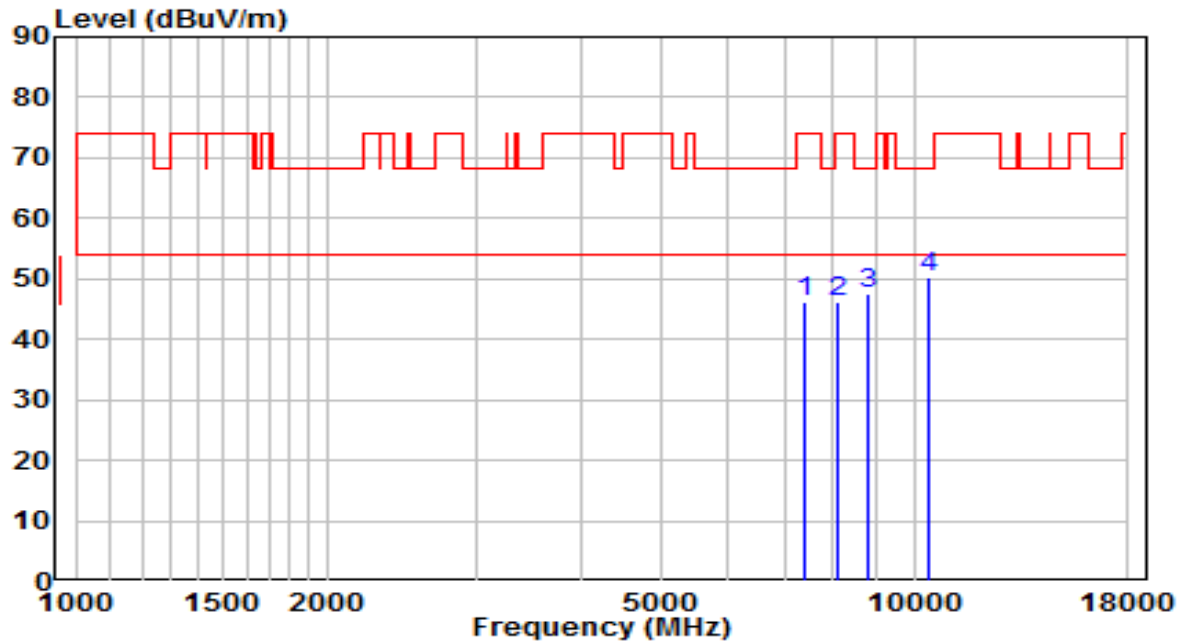


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7417.500	33.56	12.65	46.21	-27.79	74.00	Peak
2	8131.500	32.73	13.49	46.22	-27.78	74.00	Peak
3	8837.000	33.00	14.48	47.49	-20.71	68.20	Peak
4	* 10392.500	32.25	18.14	50.39	-17.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

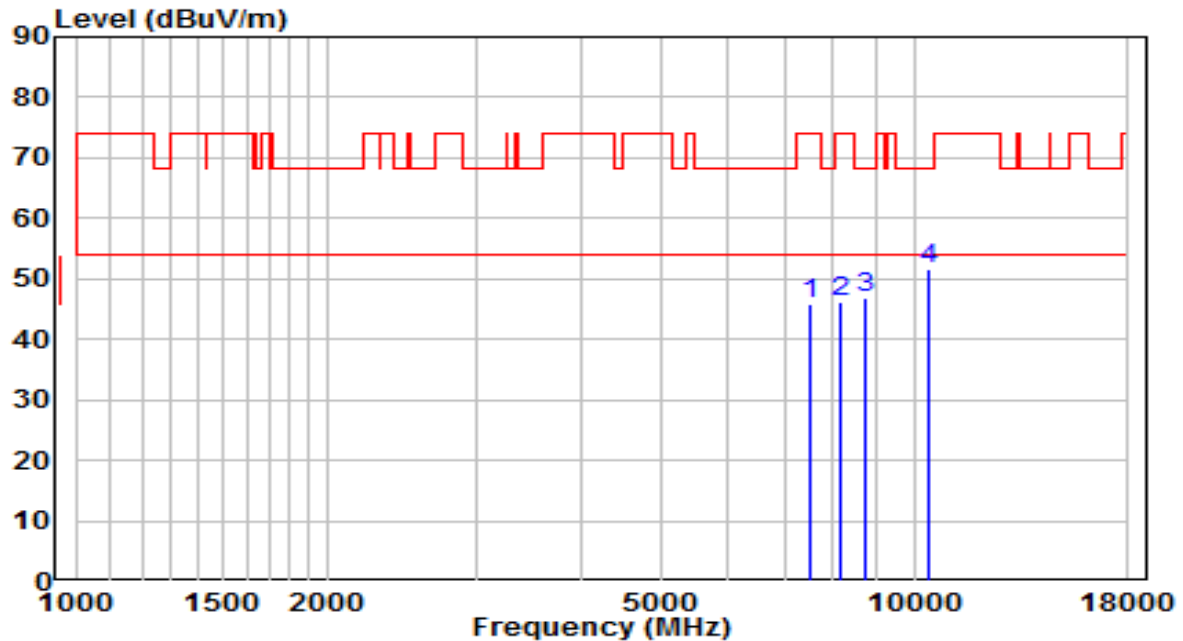


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	32.92	12.99	45.90	-28.10	74.00	Peak
2	8165.500	32.71	13.50	46.22	-27.78	74.00	Peak
3	8743.500	32.57	14.25	46.82	-21.38	68.20	Peak
4	* 10435.000	33.18	18.31	51.49	-16.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

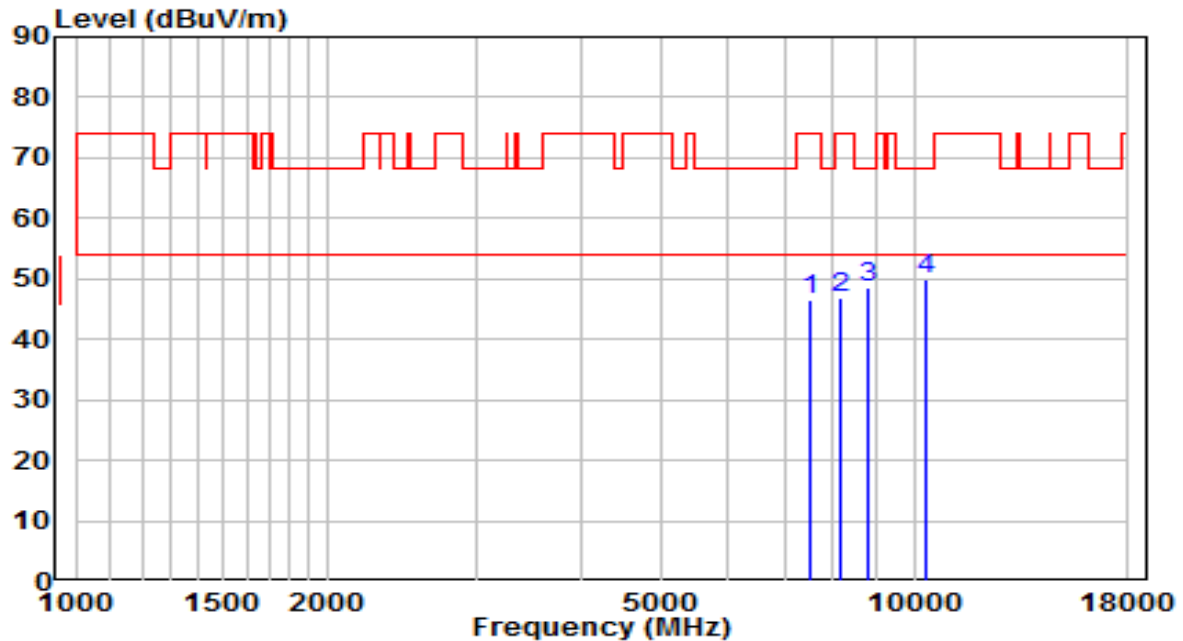


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	33.69	12.99	46.67	-27.33	74.00	Peak
2	8157.000	33.47	13.50	46.97	-27.03	74.00	Peak
3	8794.500	34.24	14.38	48.62	-19.58	68.20	Peak
4	* 10358.500	31.92	18.00	49.92	-18.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

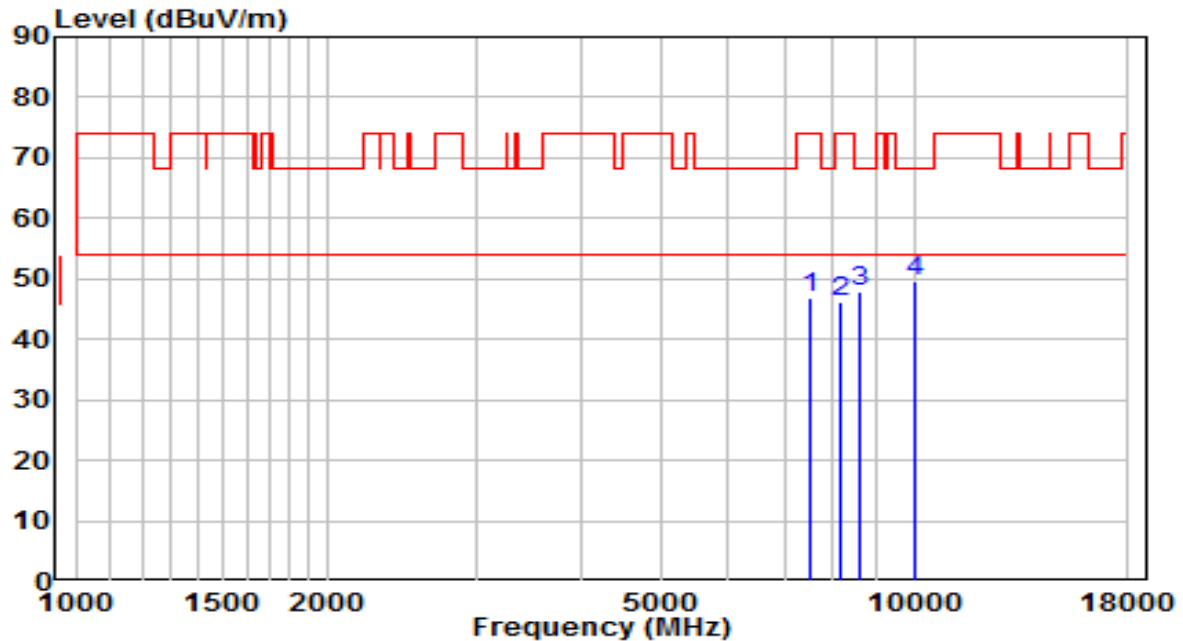


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7528.000	33.85	13.04	46.89	-27.11	74.00	Peak
2	8174.000	32.79	13.51	46.30	-27.70	74.00	Peak
3	8616.000	34.11	13.94	48.05	-20.15	68.20	Peak
4	* 10001.500	33.12	16.57	49.68	-18.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

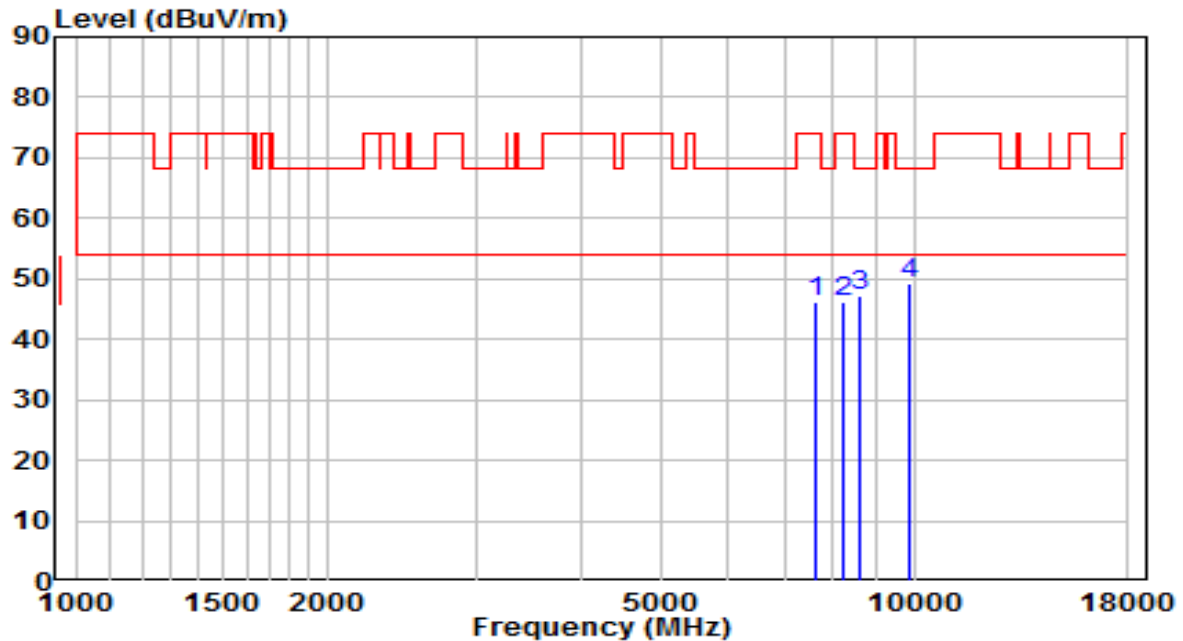


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.14	13.14	46.29	-27.71	74.00	Peak
2	8233.500	32.63	13.54	46.16	-27.84	74.00	Peak
3	8607.500	33.36	13.92	47.28	-20.92	68.20	Peak
4	* 9882.500	33.05	16.36	49.41	-18.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

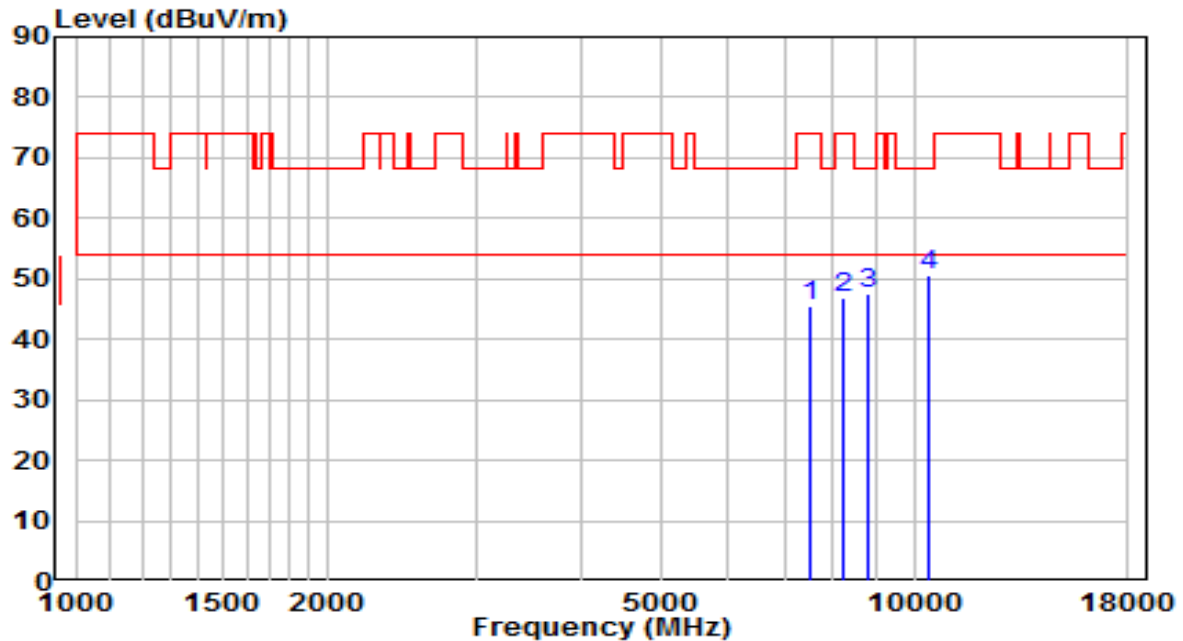


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7528.000	32.63	13.04	45.67	-28.33	74.00	Peak
2	8242.000	33.37	13.54	46.91	-27.09	74.00	Peak
3	8803.000	33.03	14.40	47.43	-20.77	68.20	Peak
4	* 10409.500	32.51	18.21	50.71	-17.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

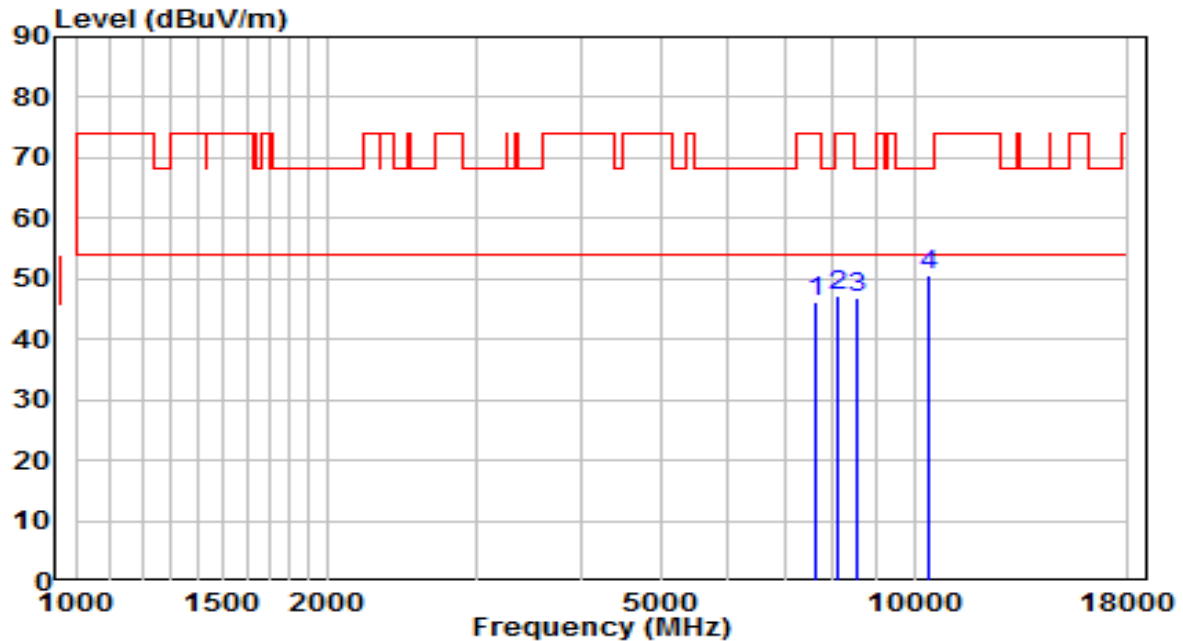


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	33.10	13.14	46.24	-27.76	74.00	Peak
2	8114.500	33.57	13.48	47.06	-26.94	74.00	Peak
3	8548.000	33.26	13.77	47.04	-21.16	68.20	Peak
4	* 10384.000	32.40	18.10	50.50	-17.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

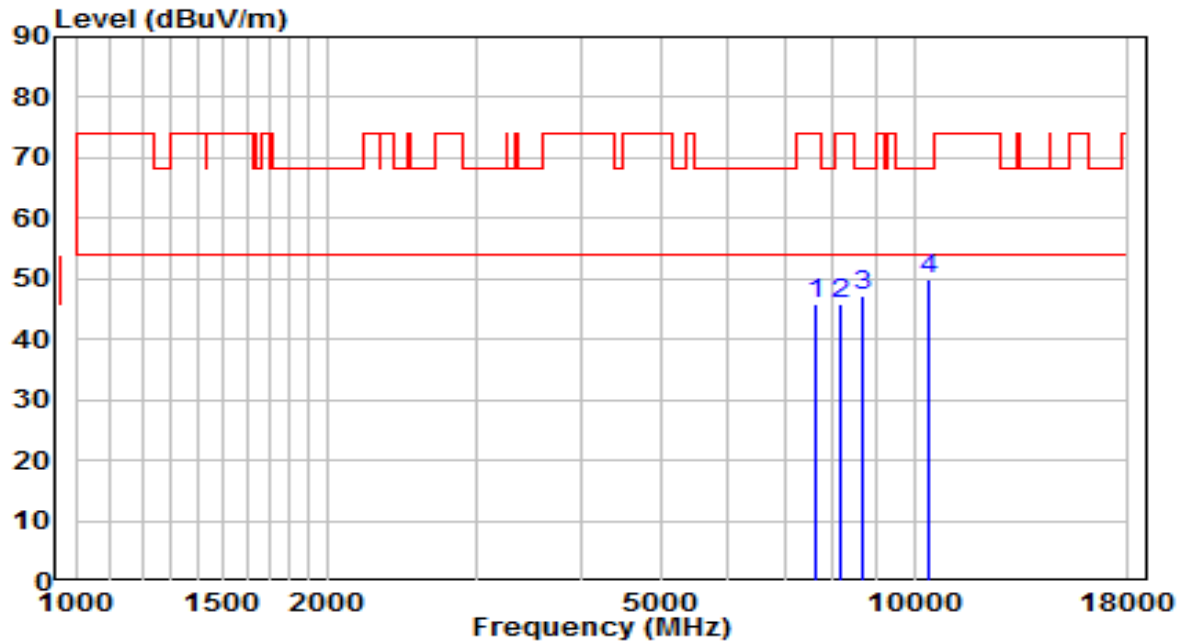


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	32.87	13.13	46.00	-28.00	74.00	Peak
2	8174.000	32.48	13.51	45.99	-28.01	74.00	Peak
3	8709.500	33.10	14.17	47.27	-20.93	68.20	Peak
4	* 10443.500	31.57	18.34	49.92	-18.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

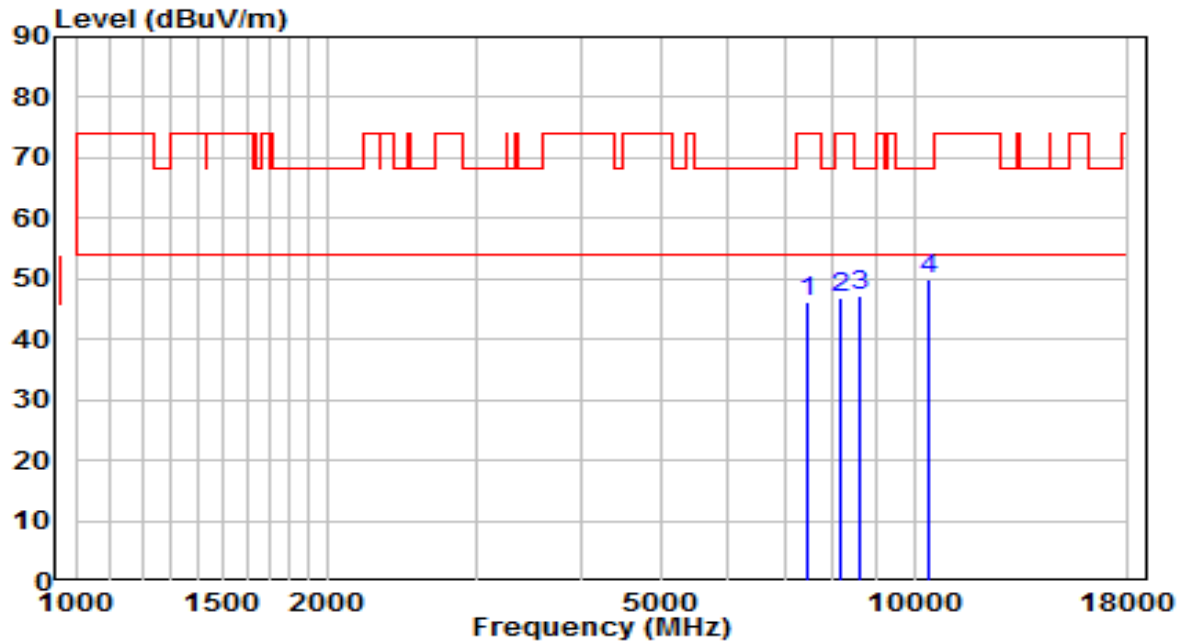


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	33.16	12.91	46.07	-27.93	74.00	Peak
2	8174.000	33.49	13.51	46.99	-27.01	74.00	Peak
3	8633.000	33.26	13.98	47.24	-20.96	68.20	Peak
4	* 10384.000	31.96	18.10	50.06	-18.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

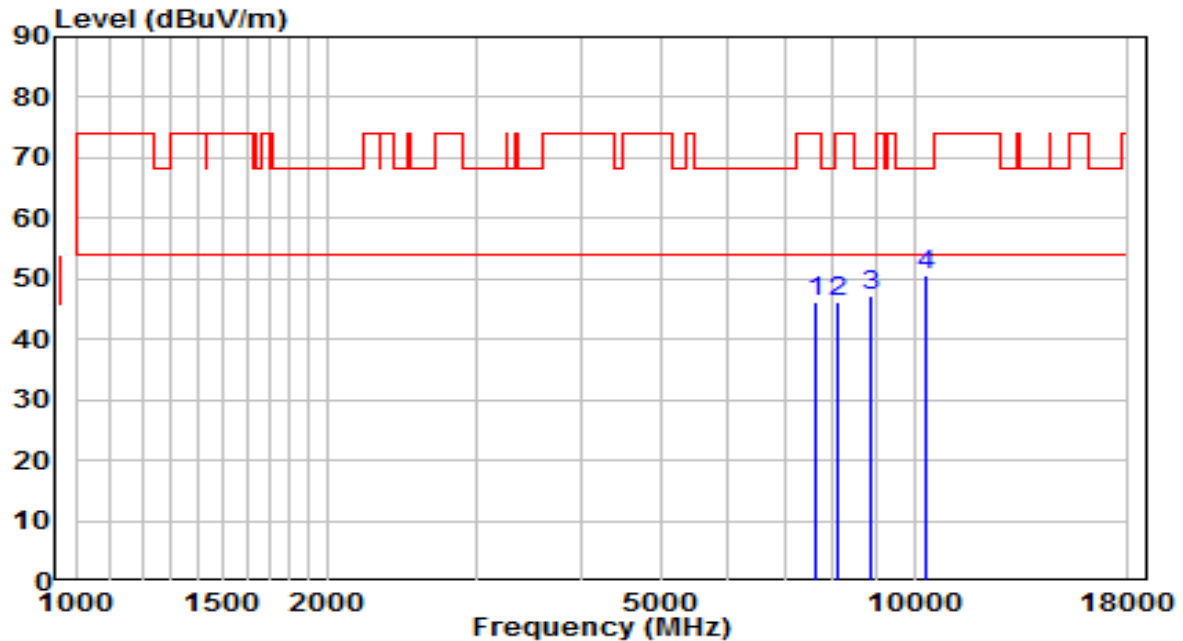


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	32.90	13.12	46.02	-27.98	74.00	Peak
2	8106.000	32.84	13.48	46.32	-27.68	74.00	Peak
3	8854.000	32.81	14.52	47.33	-20.87	68.20	Peak
4	* 10299.000	32.72	17.76	50.48	-17.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

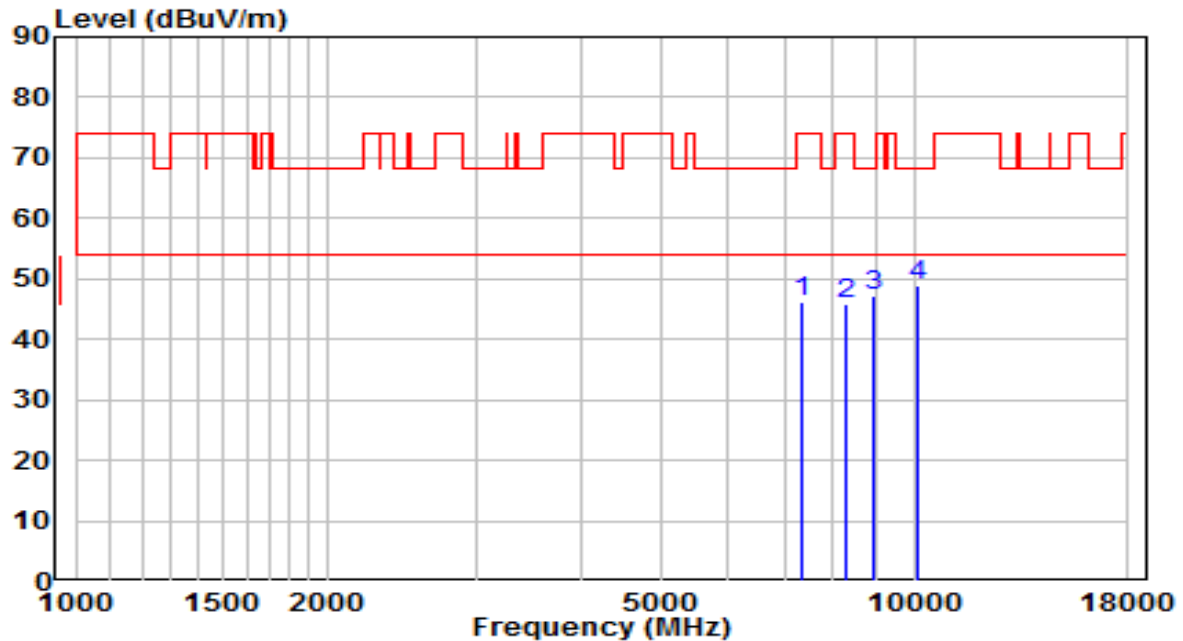


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7366.500	33.92	12.42	46.34	-27.66	74.00	Peak
2	8310.000	32.26	13.57	45.83	-28.17	74.00	Peak
3	8930.500	32.65	14.71	47.36	-20.84	68.20	Peak
4	* 10120.500	31.80	17.04	48.85	-19.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

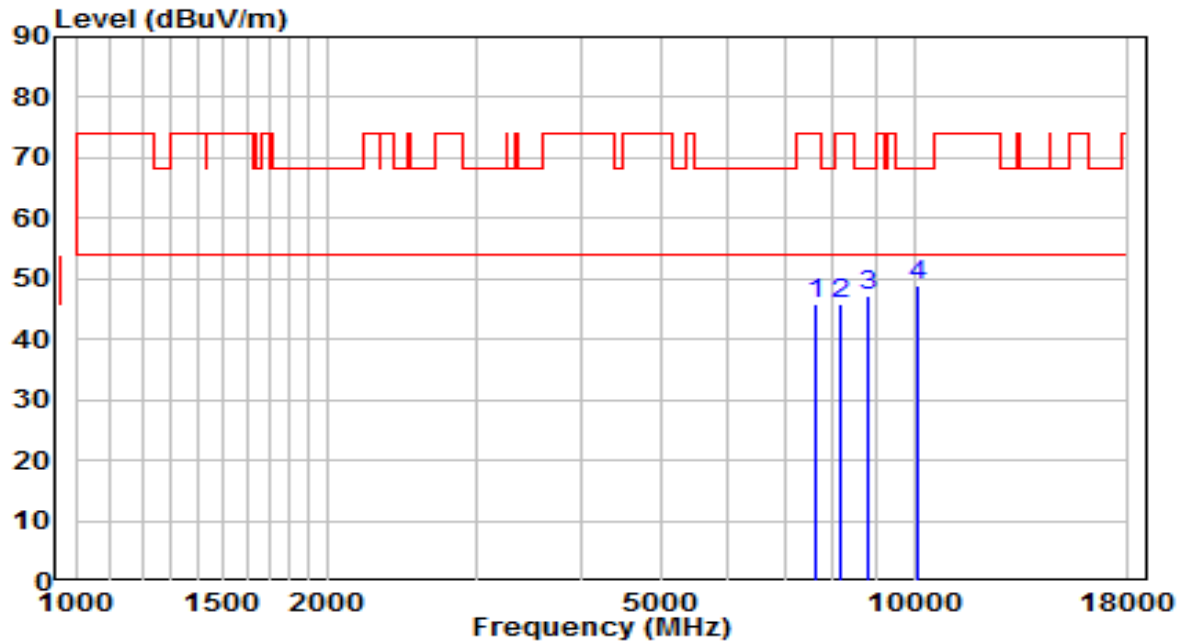


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	32.75	13.12	45.87	-28.13	74.00	Peak
2	8174.000	32.49	13.51	45.99	-28.01	74.00	Peak
3	8786.000	33.01	14.36	47.36	-20.84	68.20	Peak
4	* 10095.000	32.06	16.94	49.01	-19.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

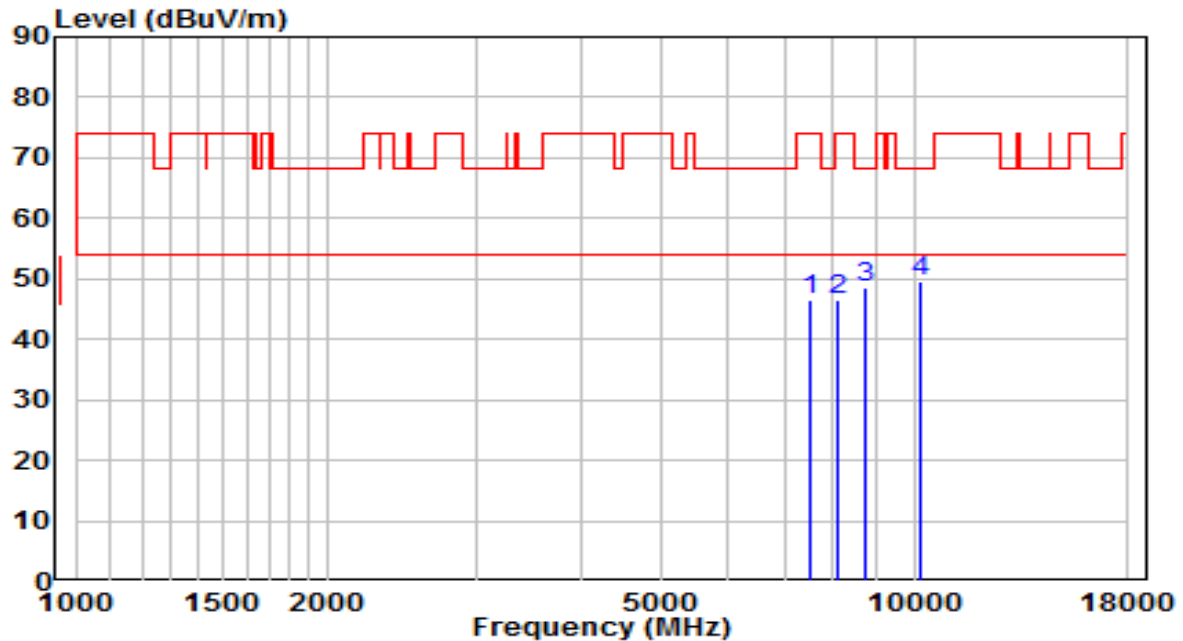


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	33.54	13.05	46.59	-27.41	74.00	Peak
2	8097.500	33.10	13.47	46.58	-27.42	74.00	Peak
3	8760.500	34.30	14.29	48.59	-19.61	68.20	Peak
4	* 10205.500	32.31	17.39	49.69	-18.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

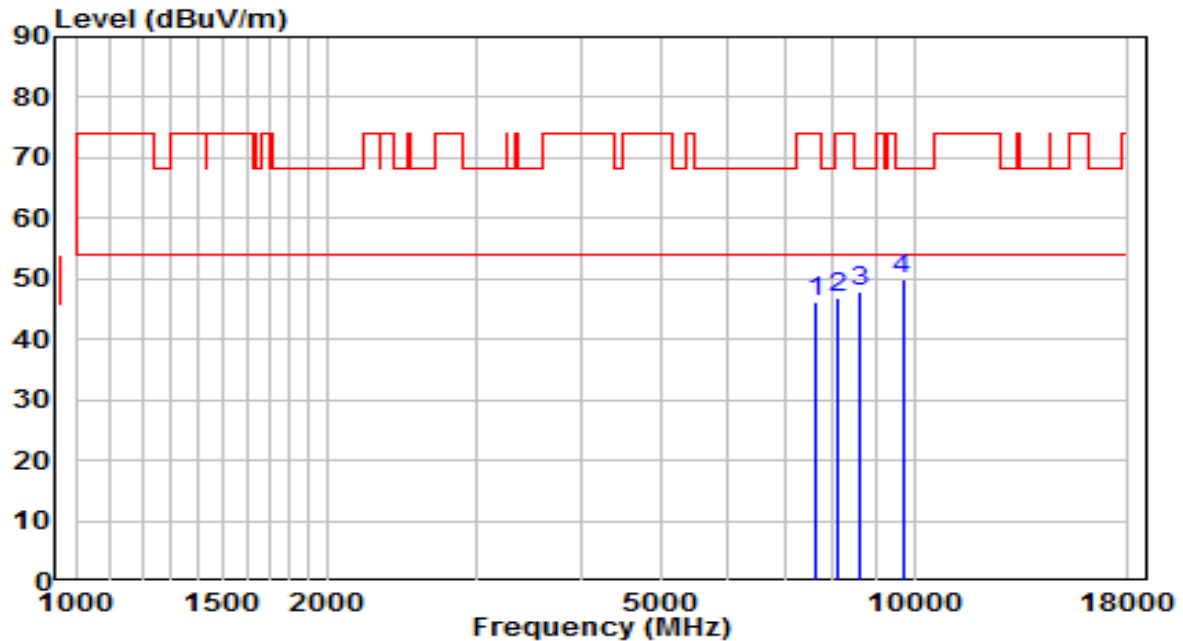


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7621.500	33.00	13.12	46.11	-27.89	74.00	Peak
2	8097.500	33.31	13.47	46.78	-27.22	74.00	Peak
3	8624.500	33.79	13.96	47.75	-20.45	68.20	Peak
4	* 9687.000	33.85	16.03	49.88	-18.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

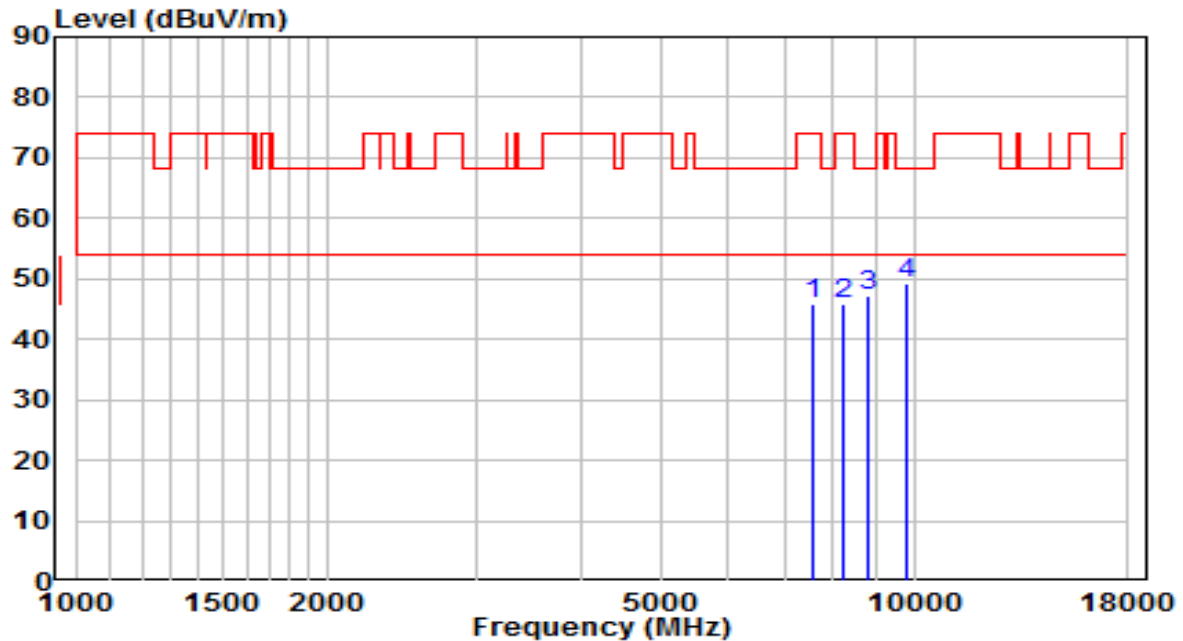


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7579.000	32.84	13.08	45.92	-28.08	74.00	Peak
2	8233.500	32.31	13.54	45.85	-28.15	74.00	Peak
3	8794.500	32.80	14.38	47.18	-21.02	68.20	Peak
4	* 9831.500	32.88	16.28	49.16	-19.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

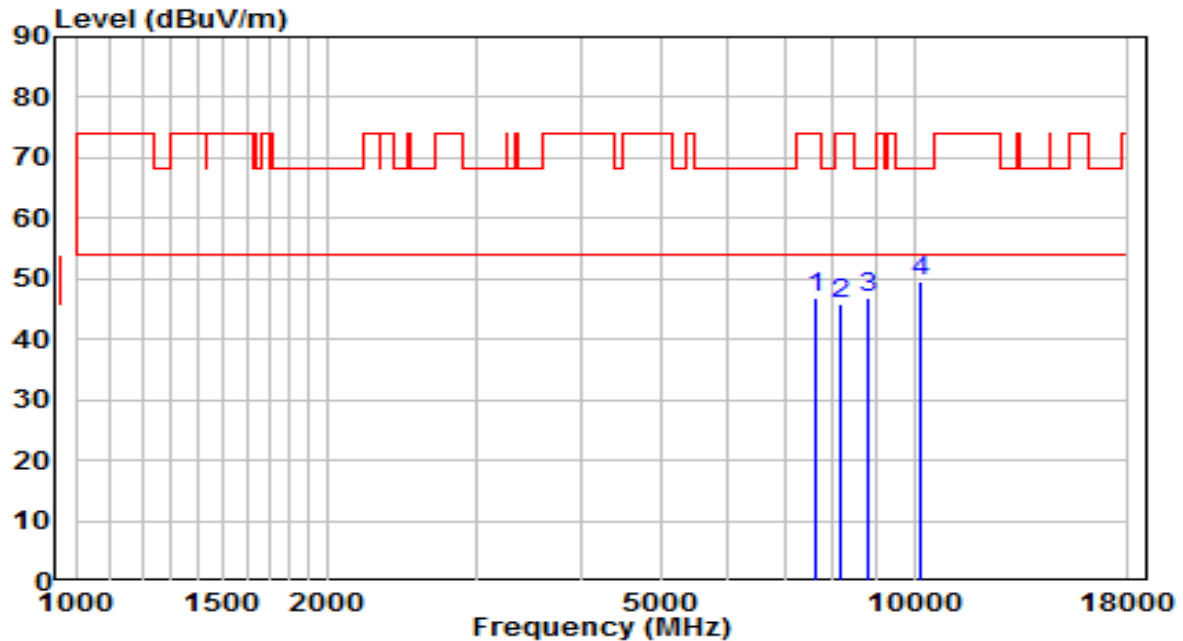


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7621.500	33.74	13.12	46.85	-27.15	74.00	Peak
2	8191.000	32.42	13.52	45.93	-28.07	74.00	Peak
3	8837.000	32.54	14.48	47.02	-21.18	68.20	Peak
4	* 10146.000	32.34	17.15	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

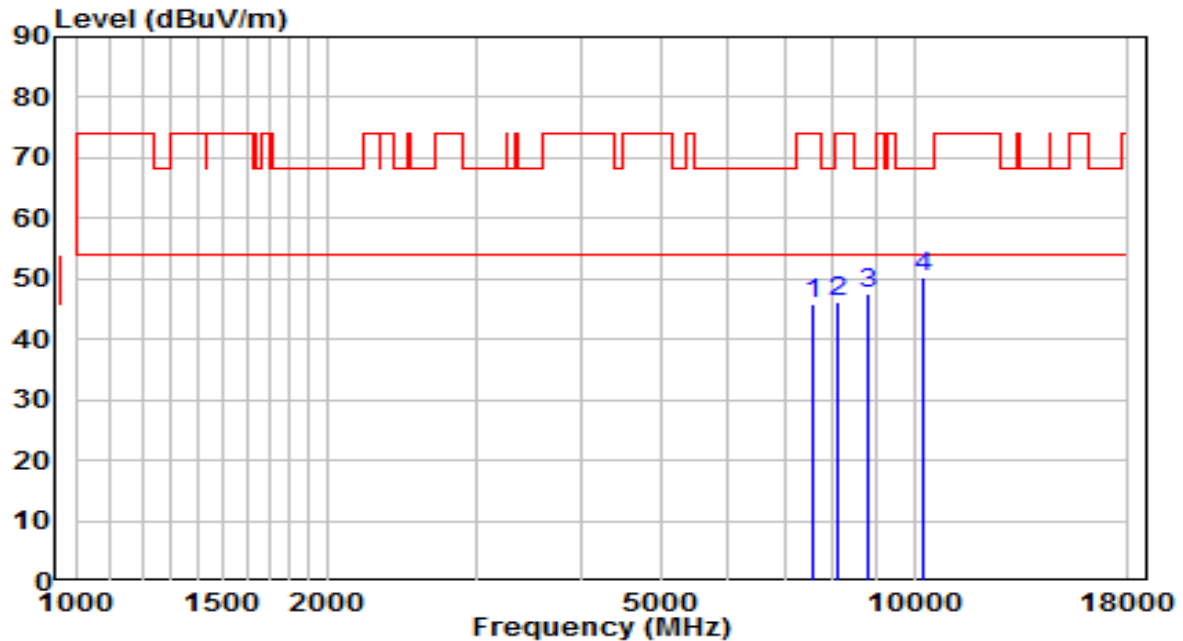


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7553.500	32.70	13.06	45.76	-28.24	74.00	Peak
2	8131.500	32.78	13.49	46.27	-27.73	74.00	Peak
3	8794.500	33.06	14.38	47.43	-20.77	68.20	Peak
4	* 10265.000	32.59	17.63	50.22	-17.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

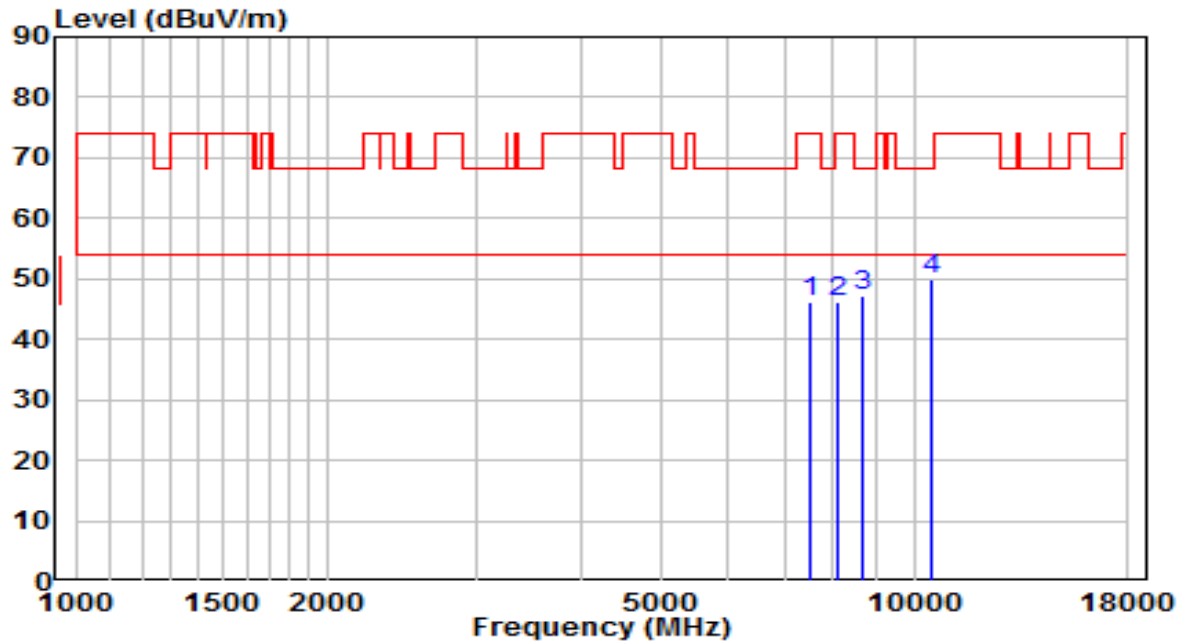


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	33.08	13.02	46.10	-27.90	74.00	Peak
2	8106.000	32.81	13.48	46.28	-27.72	74.00	Peak
3	8650.000	33.17	14.02	47.19	-21.01	68.20	Peak
4	* 10511.500	31.46	18.59	50.04	-18.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

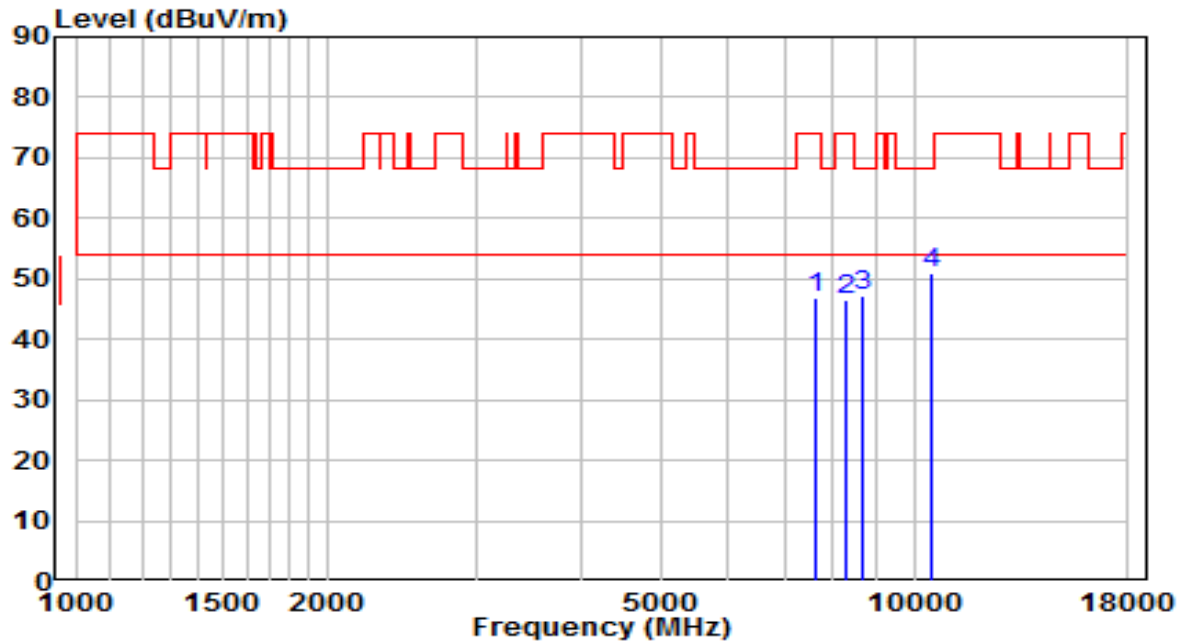


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	33.71	13.14	46.86	-27.14	74.00	Peak
2	8284.500	33.08	13.56	46.63	-27.37	74.00	Peak
3	8650.000	33.04	14.02	47.06	-21.14	68.20	Peak
4	* 10520.000	32.32	18.60	50.91	-17.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

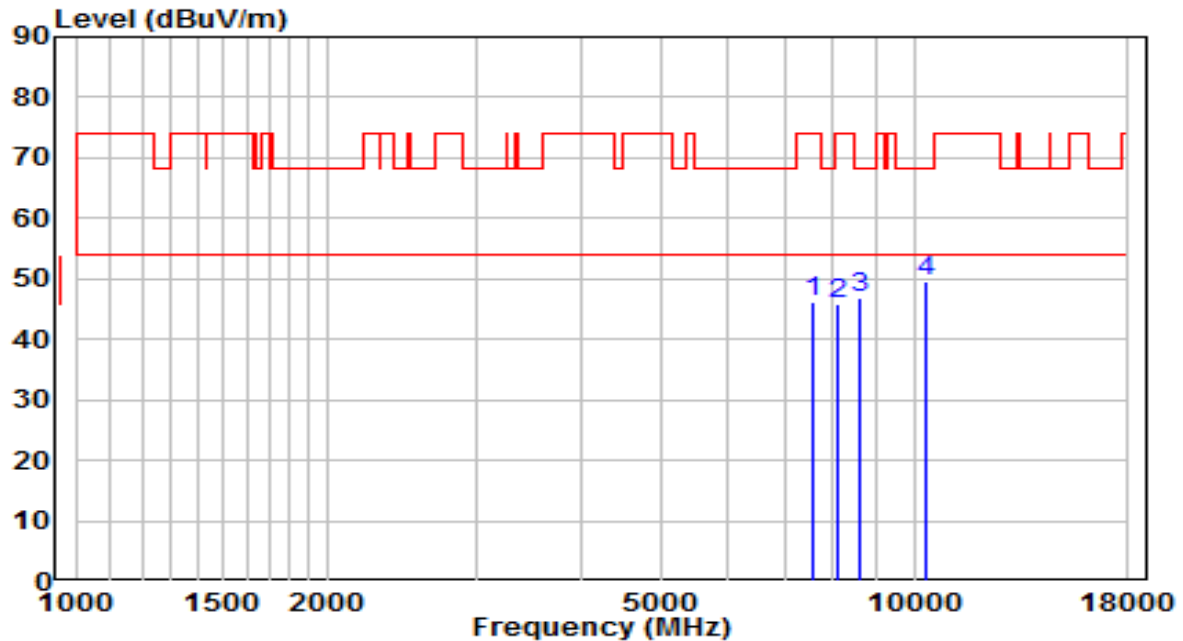


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7579.000	32.99	13.08	46.07	-27.93	74.00	Peak
2	8106.000	32.53	13.48	46.01	-27.99	74.00	Peak
3	8590.500	33.12	13.88	47.00	-21.20	68.20	Peak
4	* 10316.000	31.66	17.83	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

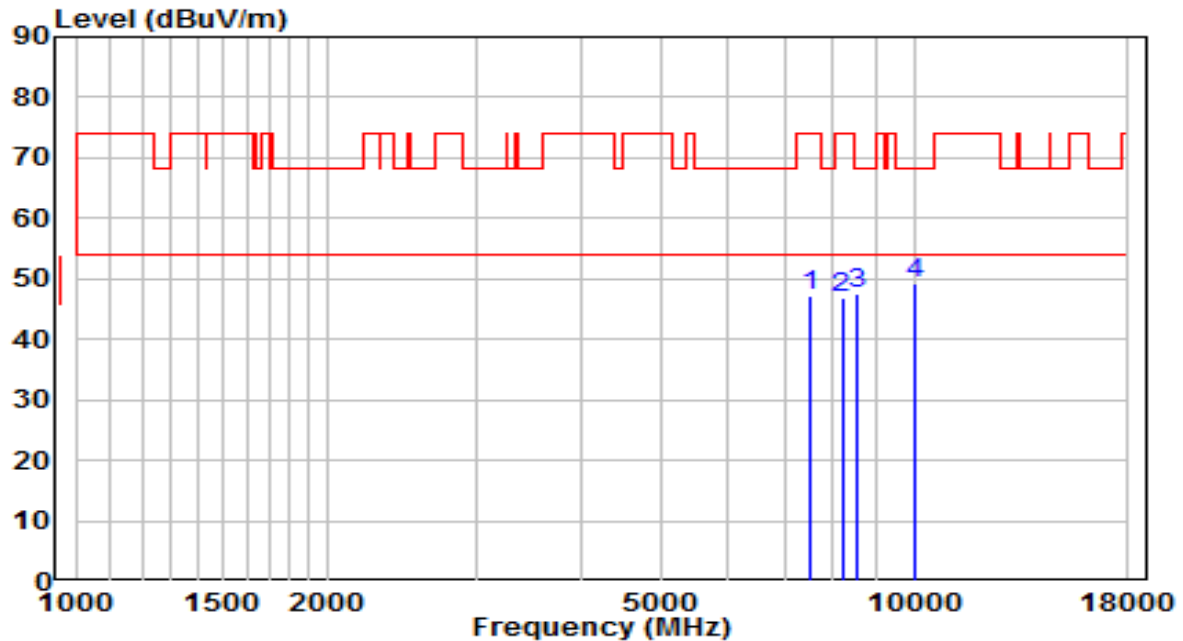


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7511.000	34.32	13.02	47.34	-26.66	74.00	Peak
2	8199.500	33.37	13.52	46.89	-27.11	74.00	Peak
3	8548.000	33.66	13.77	47.43	-20.77	68.20	Peak
4	* 10052.500	32.48	16.77	49.25	-18.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

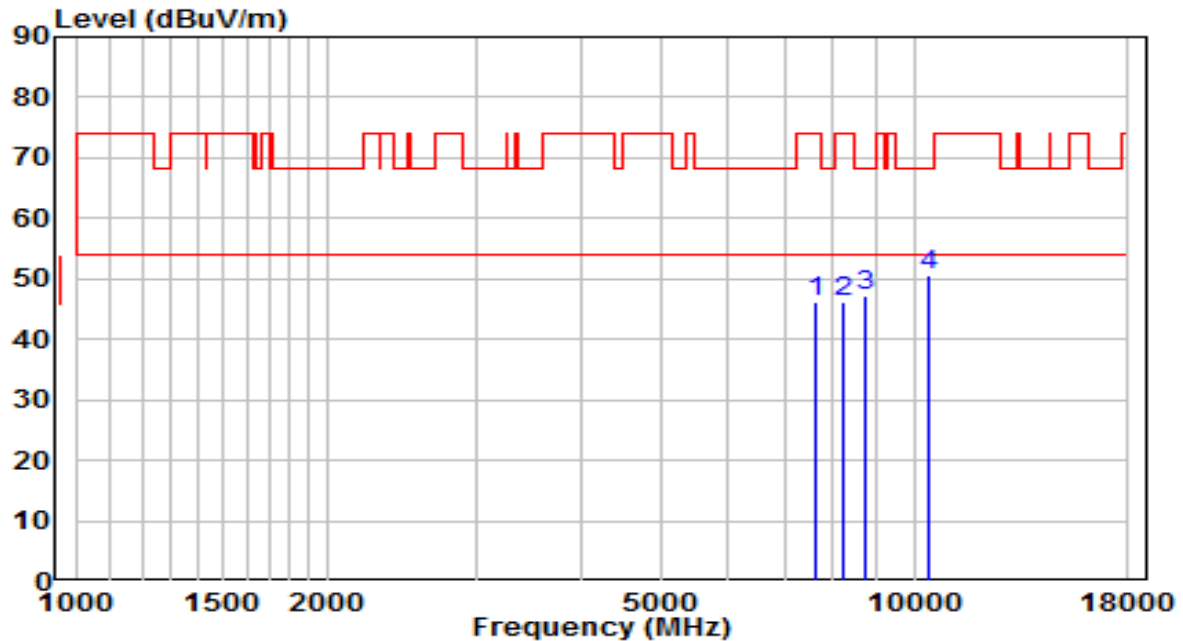


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	33.17	13.12	46.29	-27.71	74.00	Peak
2	8225.000	32.81	13.53	46.34	-27.66	74.00	Peak
3	8743.500	33.06	14.25	47.31	-20.89	68.20	Peak
4	* 10392.500	32.30	18.14	50.44	-17.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

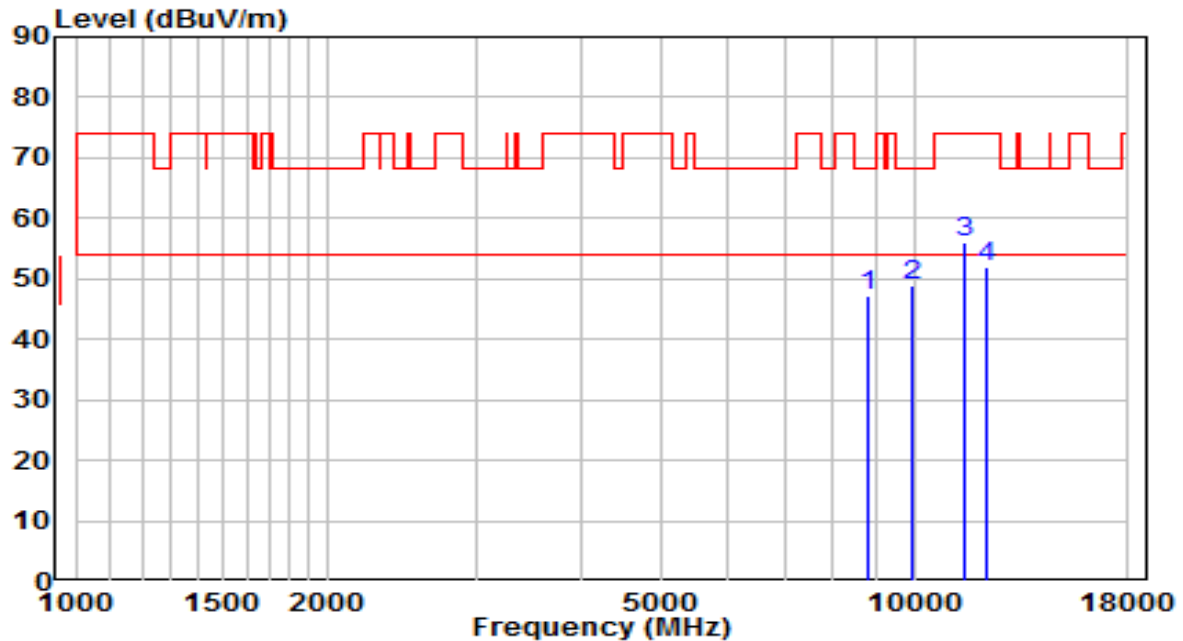


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8837.000	32.78	14.48	47.26	-20.94	68.20	Peak
2	9950.500	32.53	16.48	49.00	-19.20	68.20	Peak
3	* 11497.500	36.09	20.05	56.14	-17.86	74.00	Peak
4	12228.500	33.17	18.68	51.85	-22.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

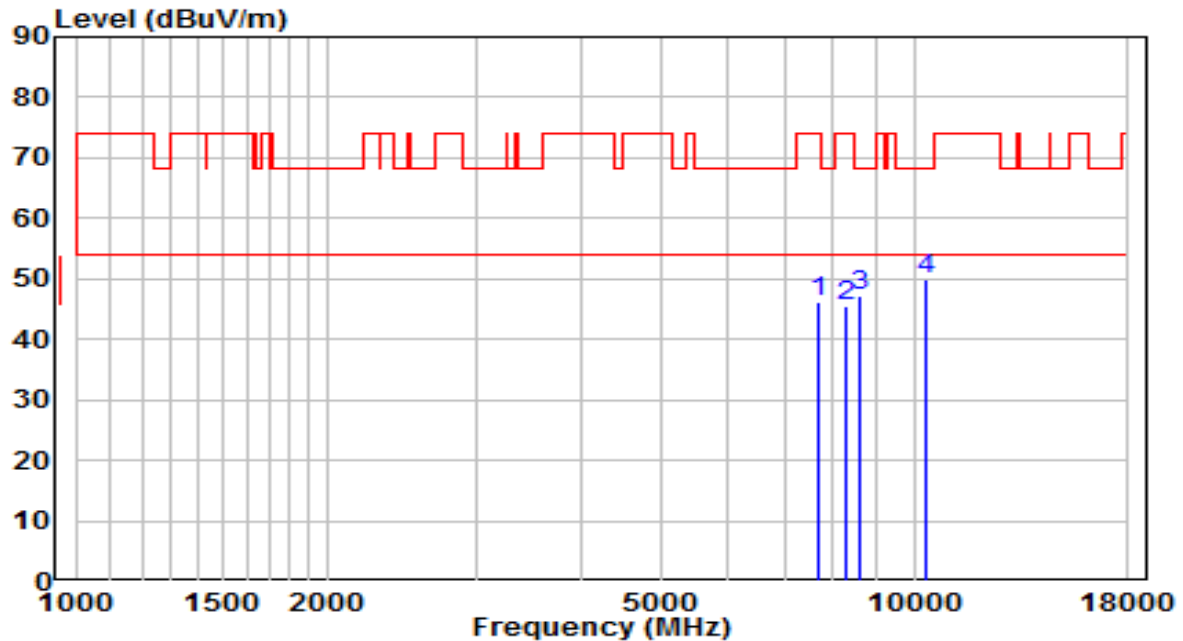


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7689.500	32.89	13.17	46.07	-27.93	74.00	Peak
2	8267.500	32.09	13.55	45.64	-28.36	74.00	Peak
3	8641.500	33.14	14.00	47.14	-21.06	68.20	Peak
4	* 10367.000	31.96	18.04	50.00	-18.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

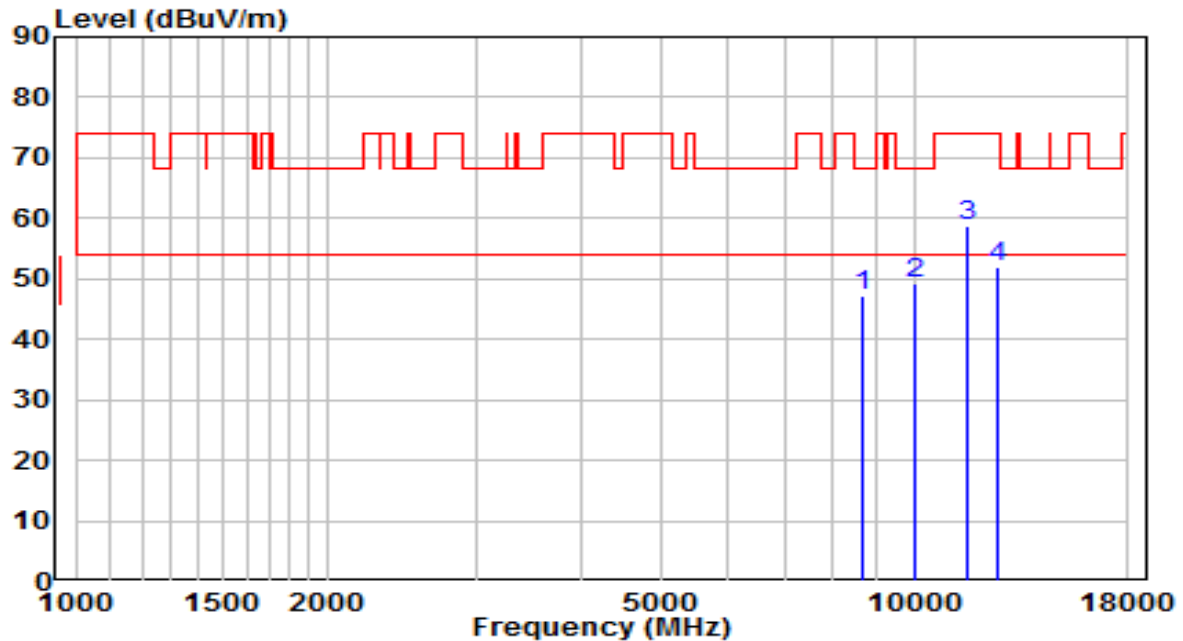


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8709.500	33.21	14.17	47.38	-20.82	68.20	Peak
2	10035.500	32.41	16.70	49.12	-19.08	68.20	Peak
3	* 11565.500	38.88	19.90	58.79	-15.21	74.00	Peak
4	12602.500	33.12	18.71	51.83	-22.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

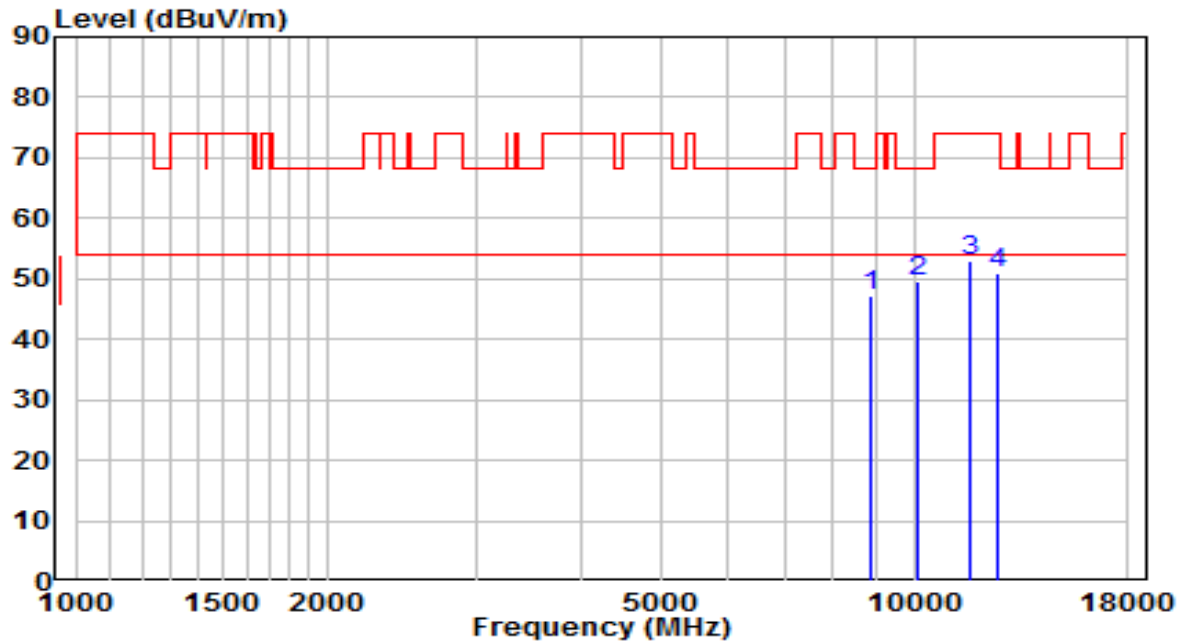


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8854.000	32.58	14.52	47.10	-21.10	68.20	Peak
2	* 10120.500	32.49	17.04	49.54	-18.66	68.20	Peak
3	11642.000	33.24	19.73	52.97	-21.03	74.00	Peak
4	12543.000	32.55	18.53	51.08	-22.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

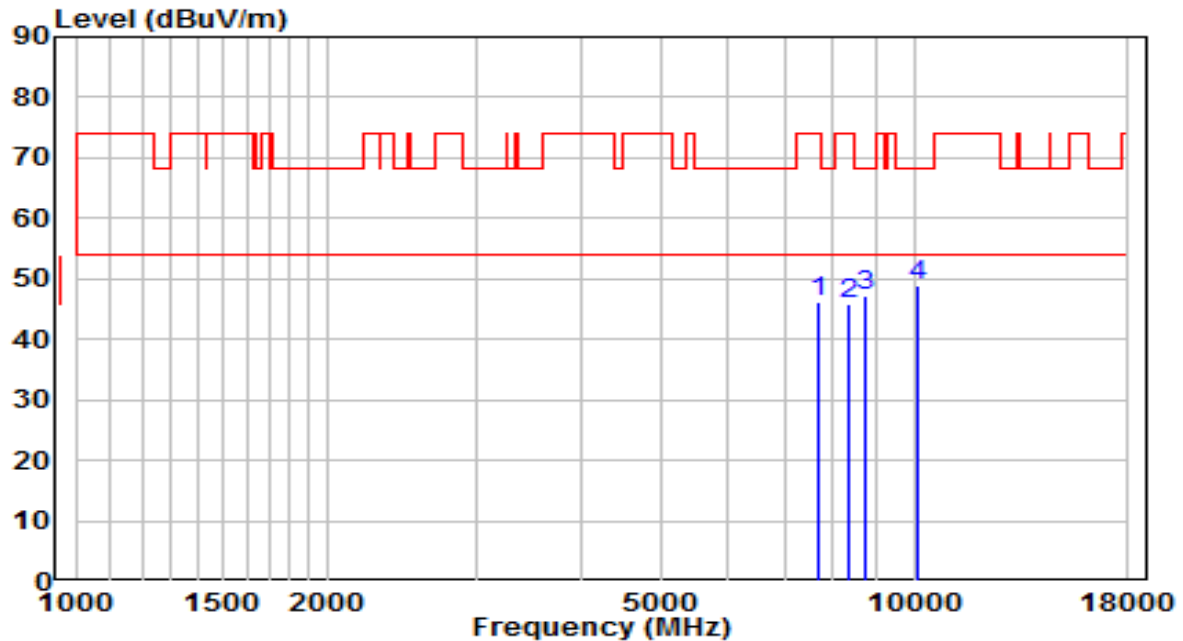


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7664.000	33.17	13.15	46.32	-27.68	74.00	Peak
2	8335.500	32.16	13.58	45.74	-28.26	74.00	Peak
3	8769.000	32.79	14.31	47.10	-21.10	68.20	Peak
4	* 10103.500	31.98	16.98	48.95	-19.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

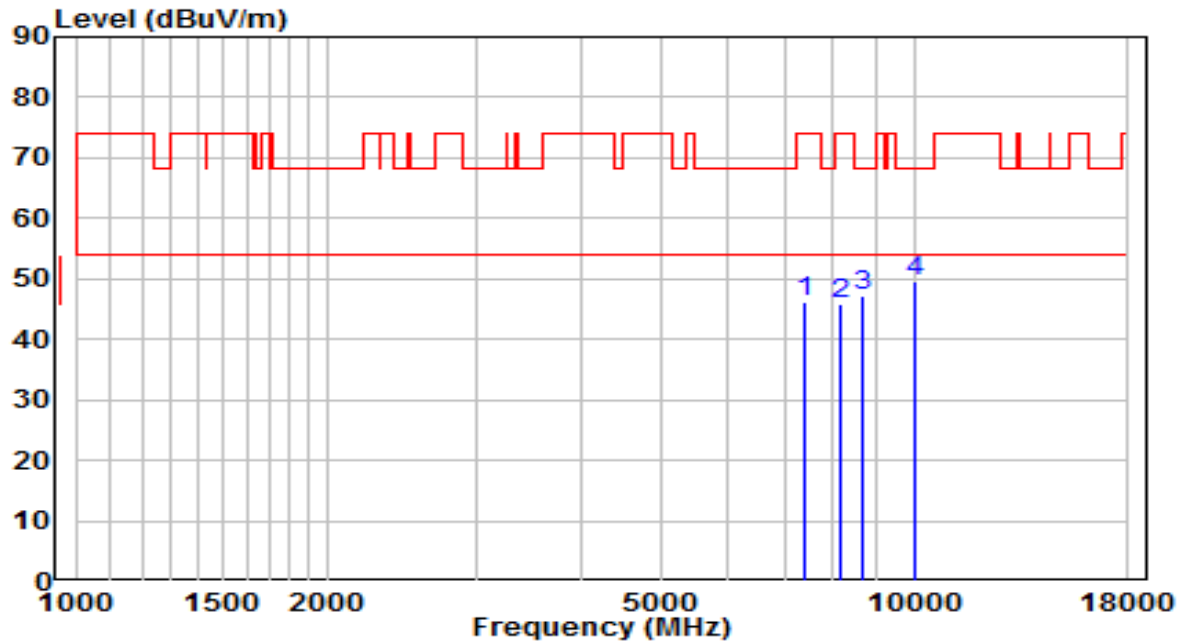


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	33.54	12.69	46.23	-27.77	74.00	Peak
2	8174.000	32.43	13.51	45.94	-28.06	74.00	Peak
3	8692.500	33.25	14.13	47.37	-20.83	68.20	Peak
4	* 10044.000	32.74	16.74	49.47	-18.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

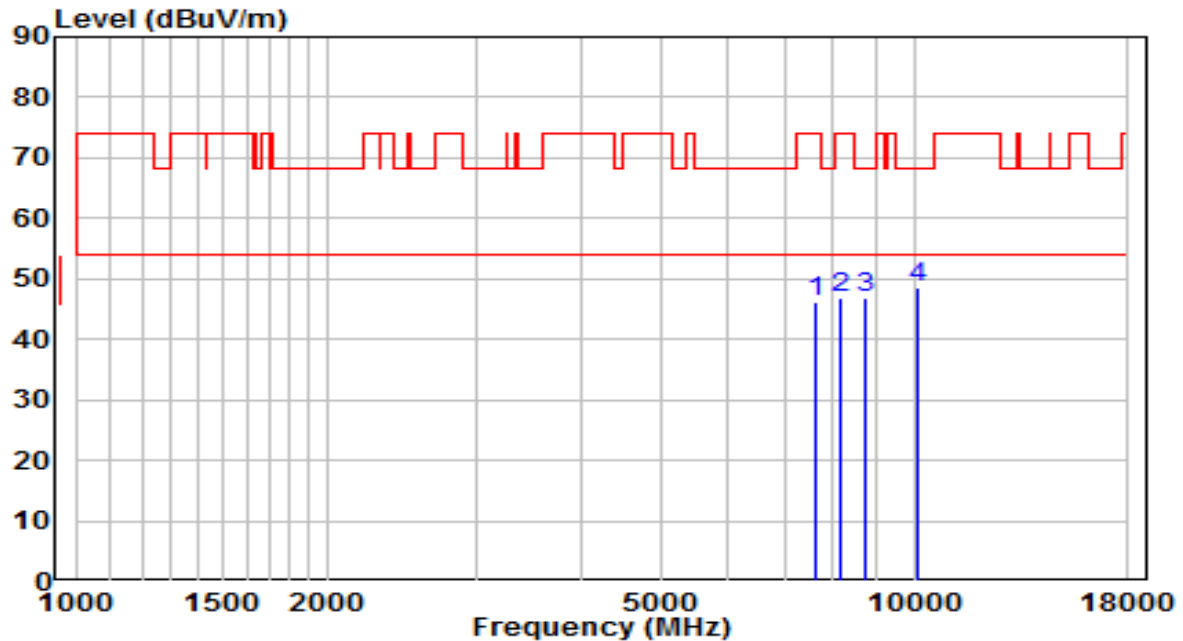


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7604.500	33.15	13.10	46.25	-27.75	74.00	Peak
2	8165.500	33.36	13.50	46.86	-27.14	74.00	Peak
3	8769.000	32.53	14.31	46.84	-21.36	68.20	Peak
4	* 10086.500	31.81	16.91	48.72	-19.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

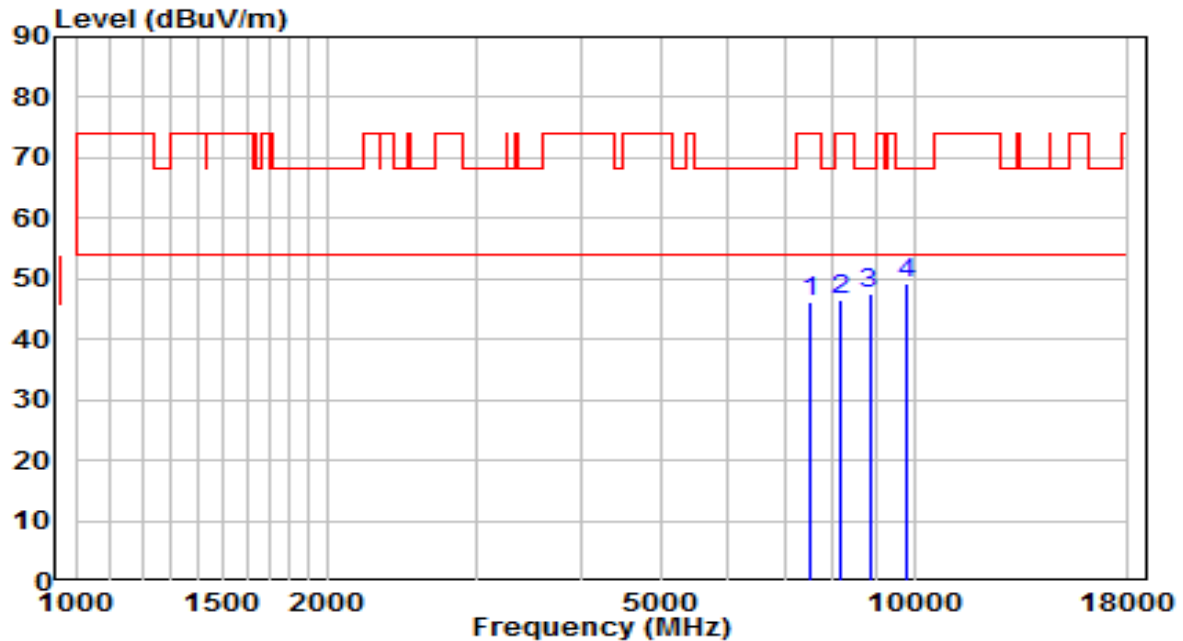


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7494.000	33.11	12.99	46.10	-27.90	74.00	Peak
2	8182.500	32.87	13.51	46.38	-27.62	74.00	Peak
3	8845.500	33.03	14.50	47.54	-20.66	68.20	Peak
4	* 9806.000	33.06	16.23	49.29	-18.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

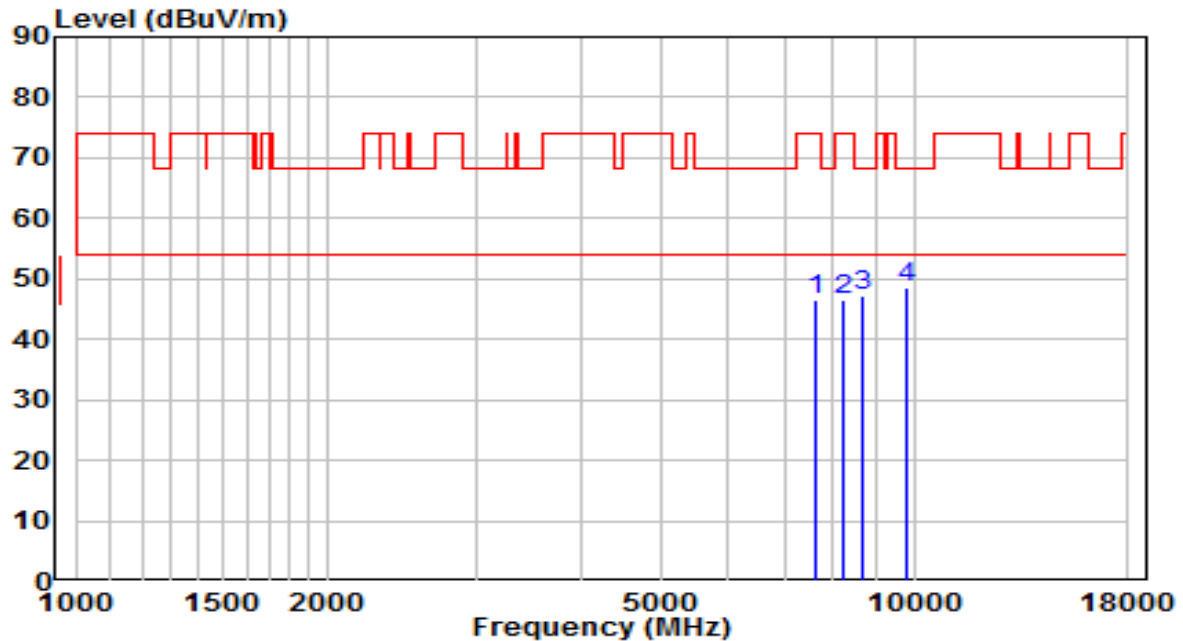


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7655.500	33.46	13.14	46.60	-27.40	74.00	Peak
2	8250.500	33.06	13.54	46.60	-27.40	74.00	Peak
3	8692.500	32.92	14.13	47.05	-21.15	68.20	Peak
4	* 9797.500	32.40	16.22	48.62	-19.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

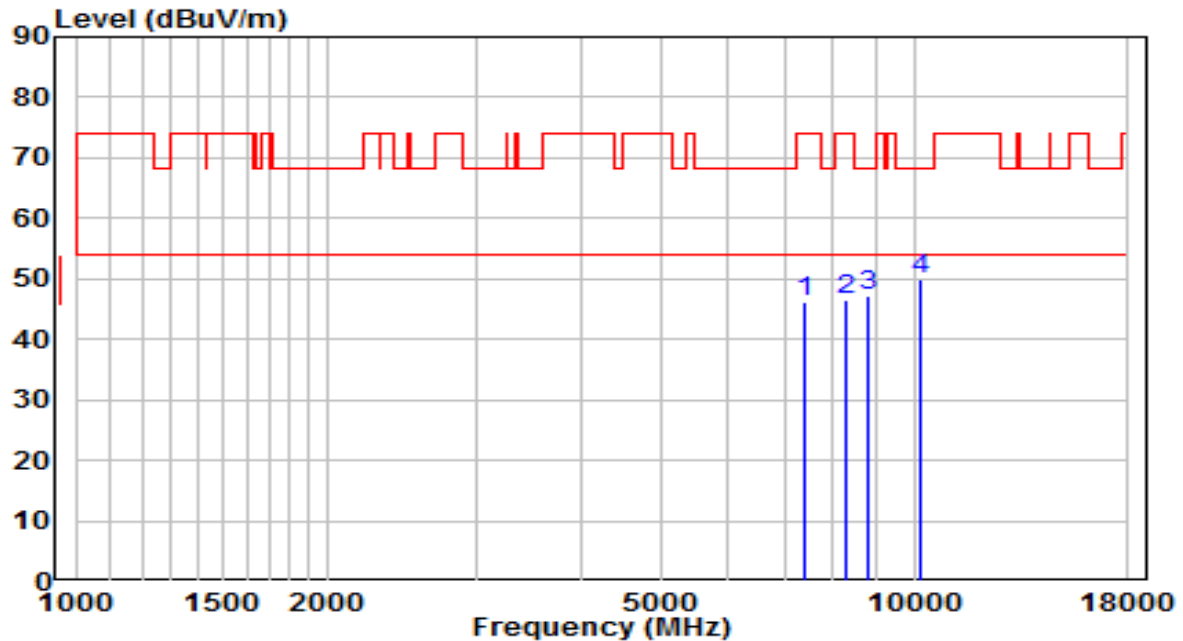


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7417.500	33.40	12.65	46.05	-27.95	74.00	Peak
2	8267.500	32.86	13.55	46.41	-27.59	74.00	Peak
3	8811.500	32.80	14.42	47.22	-20.98	68.20	Peak
4	* 10146.000	32.65	17.15	49.79	-18.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

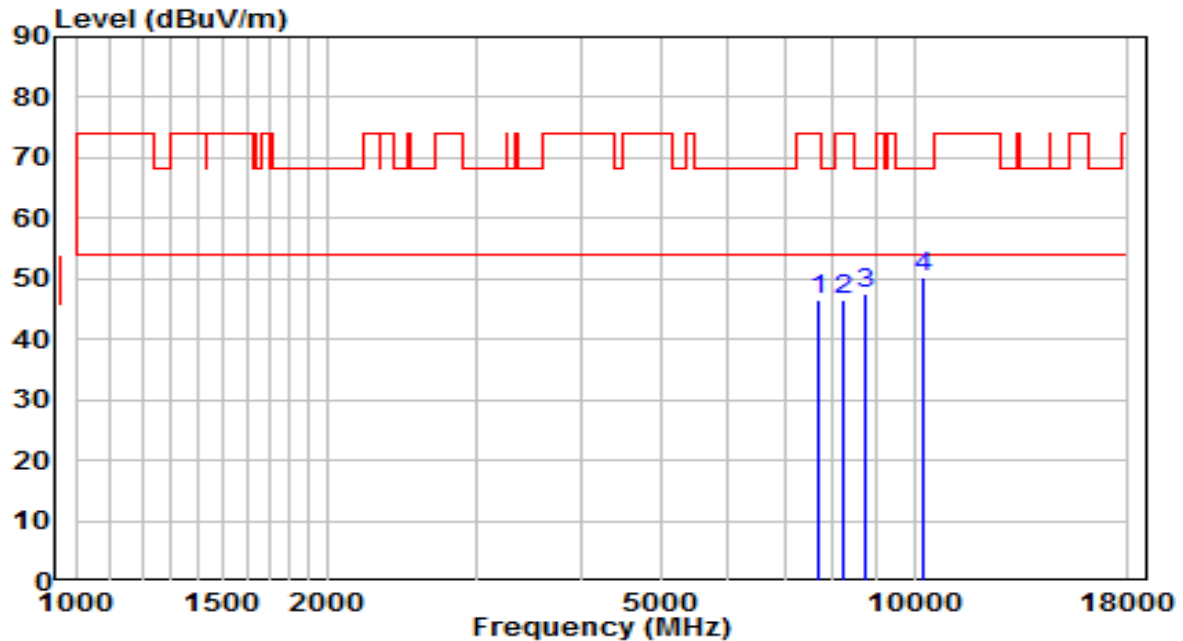


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	33.21	13.15	46.36	-27.64	74.00	Peak
2	8216.500	32.89	13.53	46.41	-27.59	74.00	Peak
3	8769.000	33.23	14.31	47.54	-20.66	68.20	Peak
4	* 10265.000	32.48	17.63	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

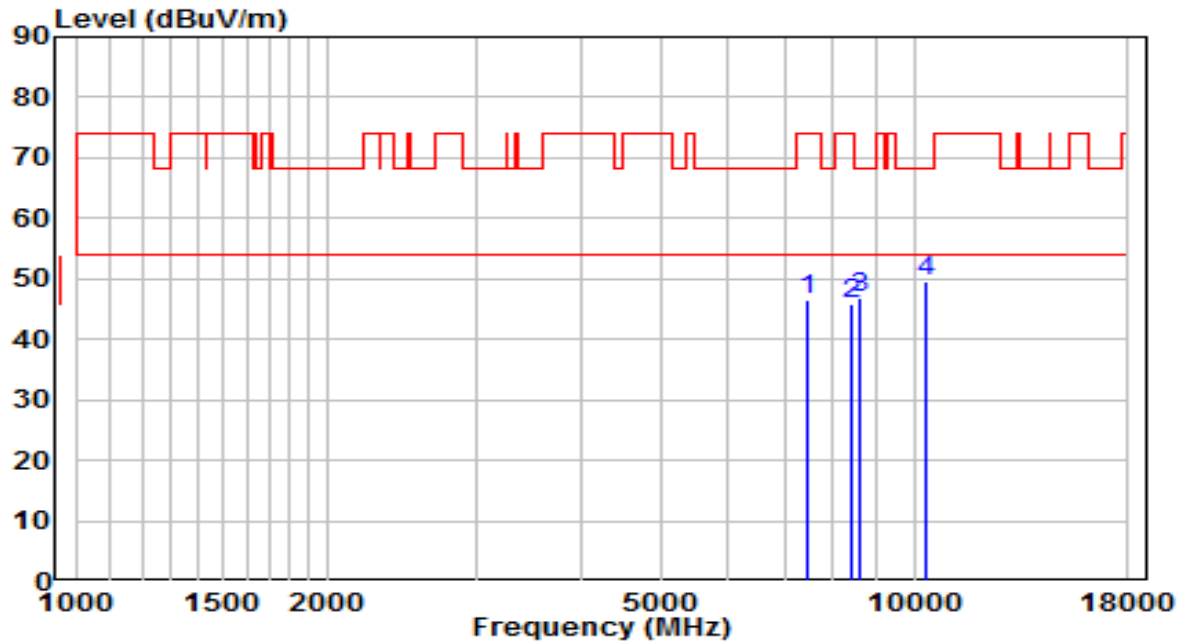


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.61	12.91	46.52	-27.48	74.00	Peak
2	8403.500	32.28	13.61	45.89	-28.11	74.00	Peak
3	8616.000	33.01	13.94	46.95	-21.25	68.20	Peak
4	* 10316.000	31.66	17.83	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

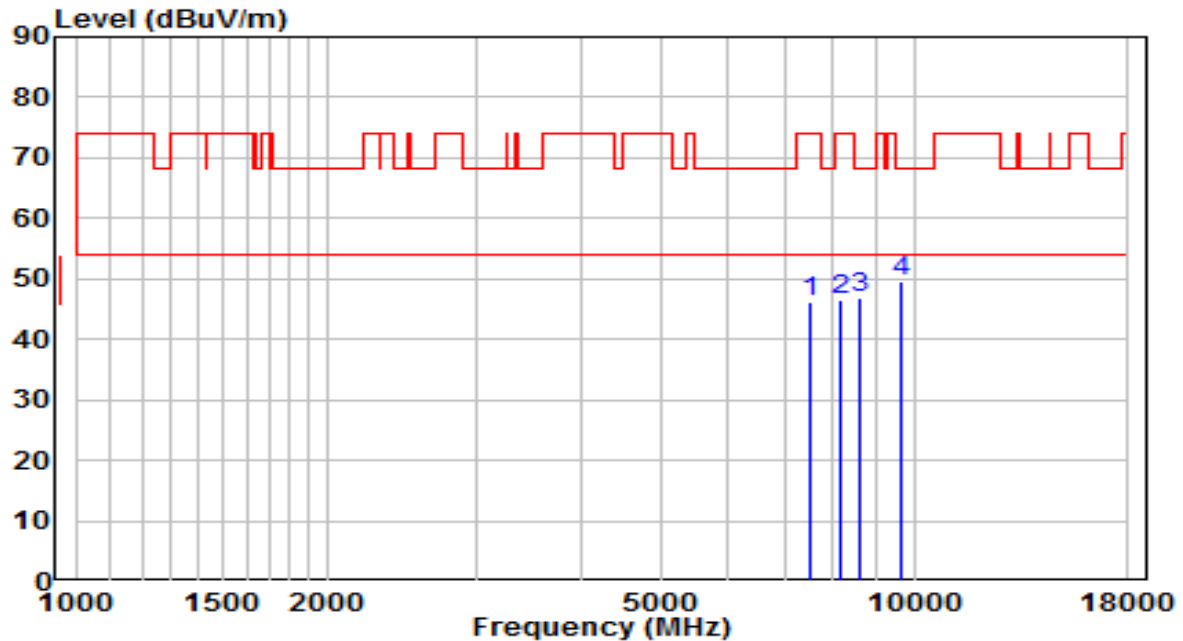


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7502.500	33.30	13.02	46.31	-27.69	74.00	Peak
2	8191.000	32.98	13.52	46.49	-27.51	74.00	Peak
3	8607.500	33.09	13.92	47.01	-21.19	68.20	Peak
4	* 9678.500	33.46	16.02	49.48	-18.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

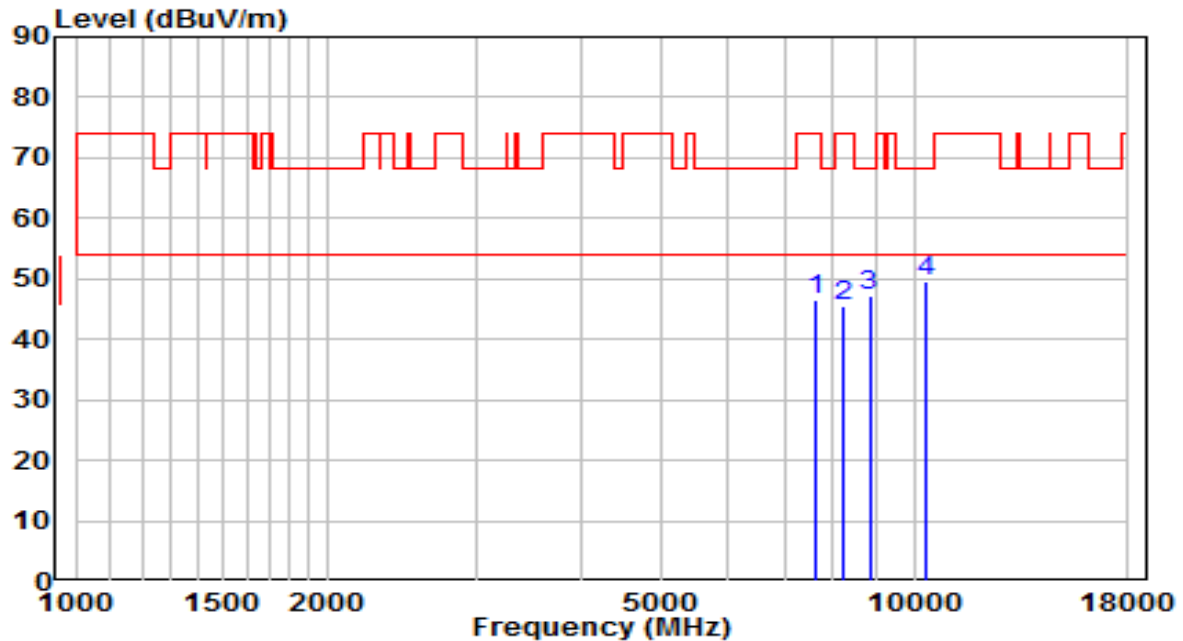


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	33.28	13.13	46.41	-27.59	74.00	Peak
2	8242.000	32.13	13.54	45.67	-28.33	74.00	Peak
3	8845.500	32.81	14.50	47.31	-20.89	68.20	Peak
4	* 10341.500	31.54	17.93	49.47	-18.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

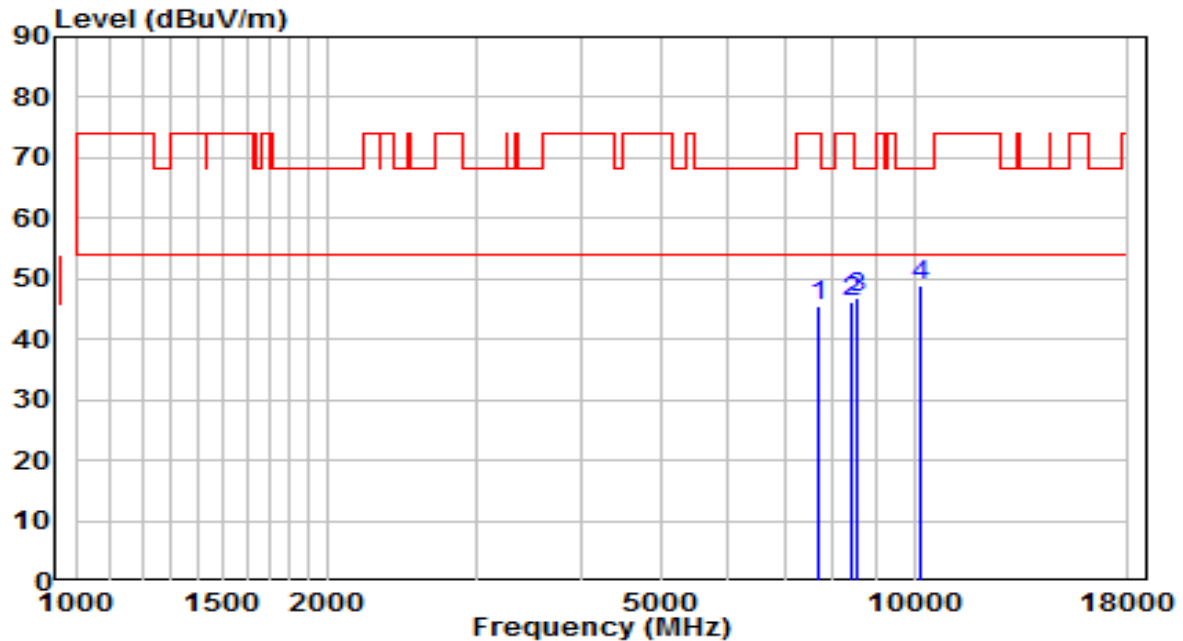


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7681.000	32.43	13.17	45.59	-28.41	74.00	Peak
2	8412.000	32.53	13.62	46.15	-27.85	74.00	Peak
3	8539.500	33.13	13.75	46.88	-21.32	68.20	Peak
4	* 10163.000	31.70	17.22	48.92	-19.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

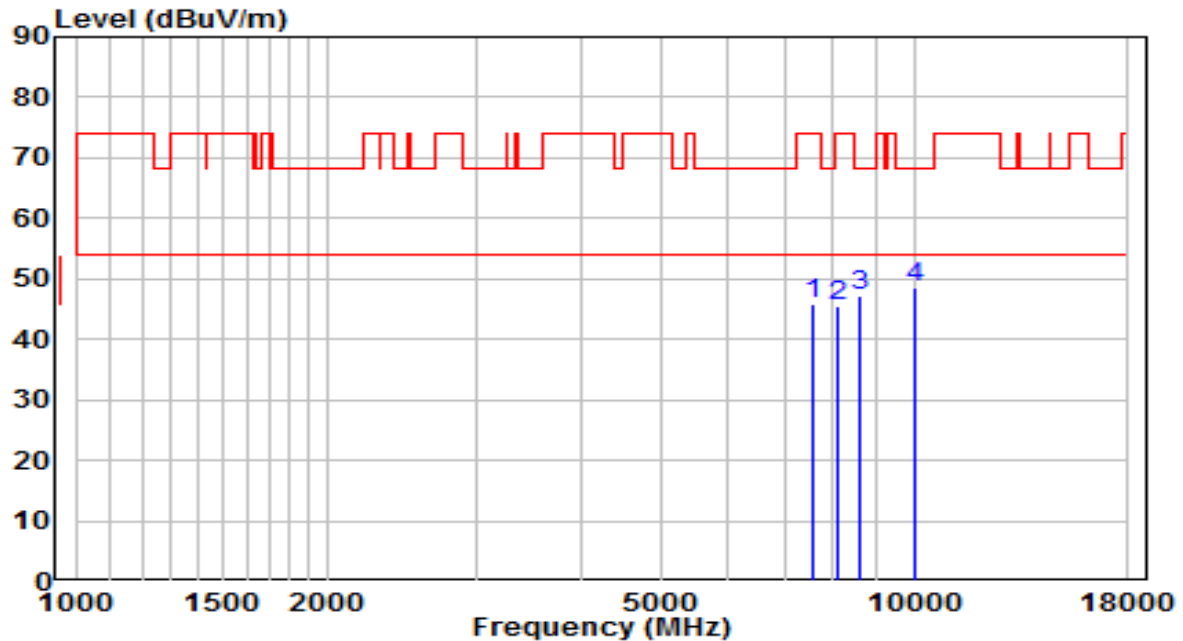


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	32.80	13.09	45.90	-28.10	74.00	Peak
2	8089.000	32.12	13.47	45.59	-28.41	74.00	Peak
3	8616.000	33.13	13.94	47.07	-21.13	68.20	Peak
4	* 10027.000	31.95	16.67	48.62	-19.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

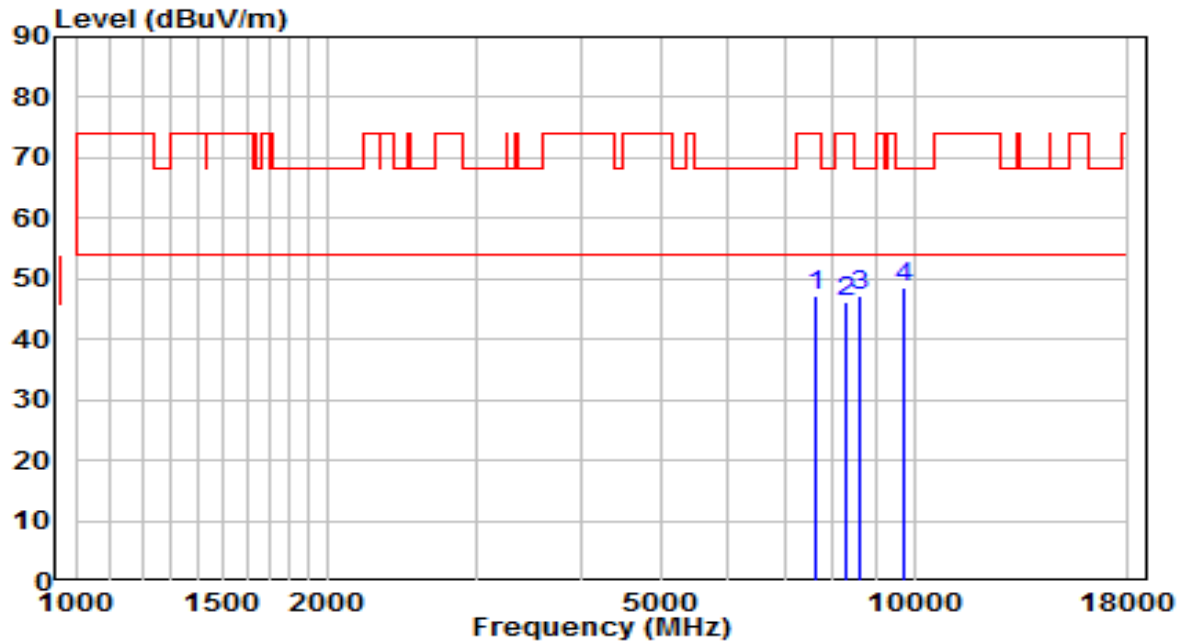


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7613.000	34.07	13.11	47.18	-26.82	74.00	Peak
2	8276.000	32.74	13.55	46.29	-27.71	74.00	Peak
3	8616.000	33.25	13.94	47.19	-21.01	68.20	Peak
4	* 9755.000	32.57	16.15	48.72	-19.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

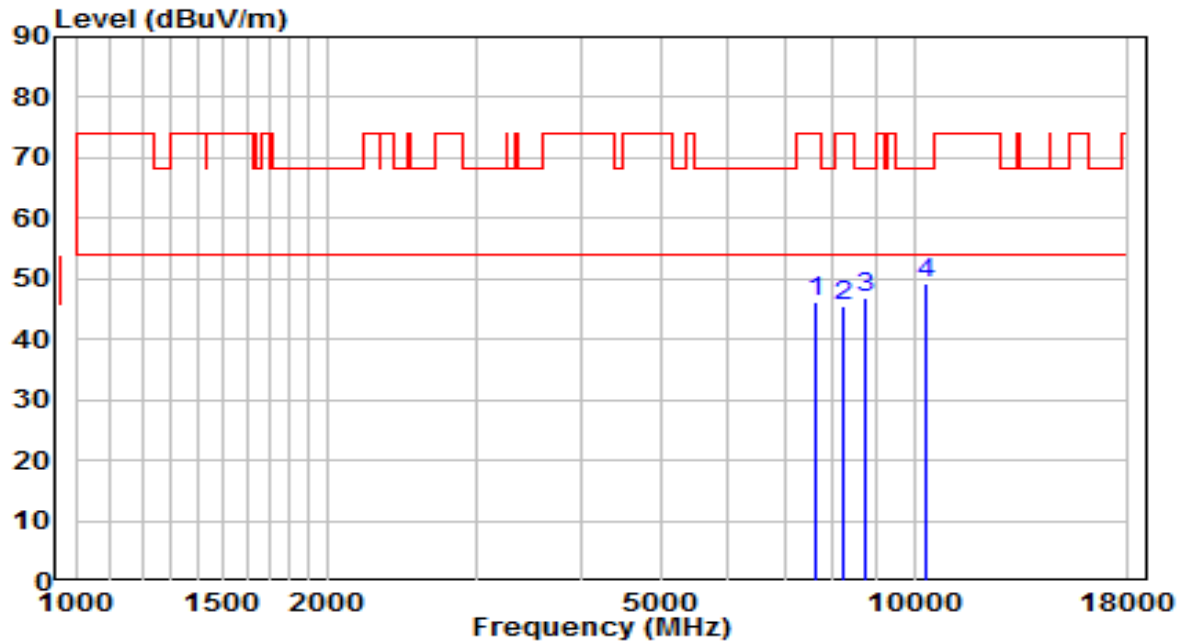


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7613.000	33.25	13.11	46.35	-27.65	74.00	Peak
2	8242.000	32.09	13.54	45.62	-28.38	74.00	Peak
3	8760.500	32.51	14.29	46.81	-21.39	68.20	Peak
4	* 10358.500	31.36	18.00	49.36	-18.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

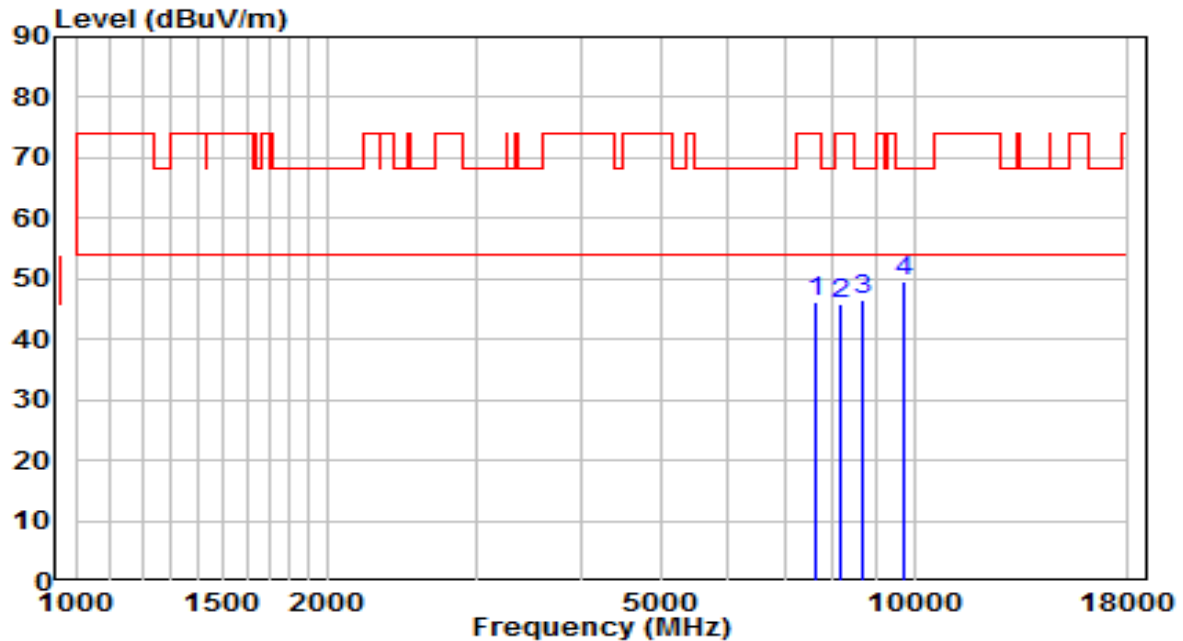


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	33.15	13.11	46.26	-27.74	74.00	Peak
2	8191.000	32.30	13.52	45.82	-28.18	74.00	Peak
3	8692.500	32.45	14.13	46.58	-21.62	68.20	Peak
4	* 9738.000	33.34	16.12	49.46	-18.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

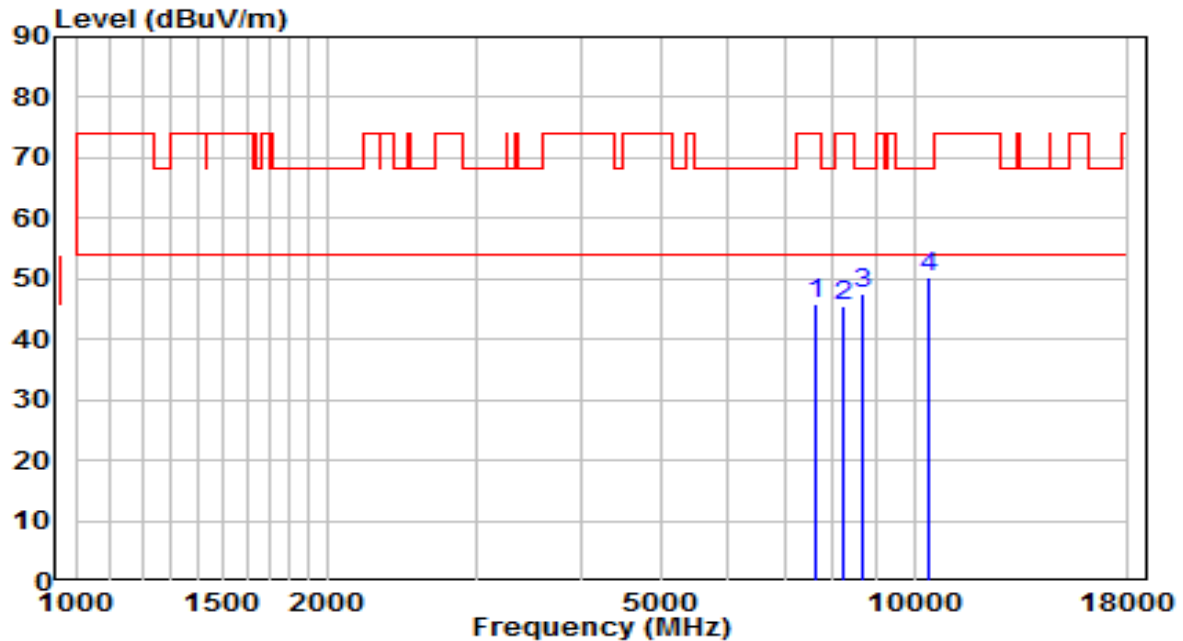


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	32.74	13.13	45.87	-28.13	74.00	Peak
2	8233.500	32.01	13.54	45.55	-28.45	74.00	Peak
3	8684.000	33.46	14.11	47.56	-20.64	68.20	Peak
4	* 10418.000	32.06	18.24	50.30	-17.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

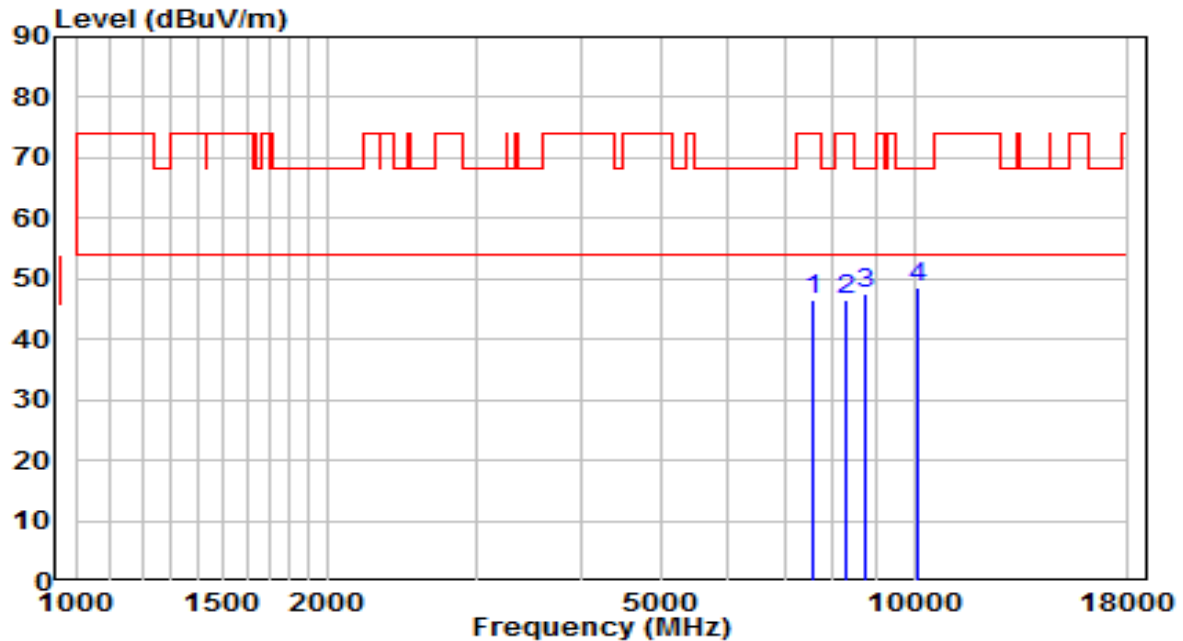


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7579.000	33.54	13.08	46.62	-27.38	74.00	Peak
2	8267.500	32.95	13.55	46.50	-27.50	74.00	Peak
3	8769.000	33.20	14.31	47.51	-20.69	68.20	Peak
4	* 10129.000	31.57	17.08	48.65	-19.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

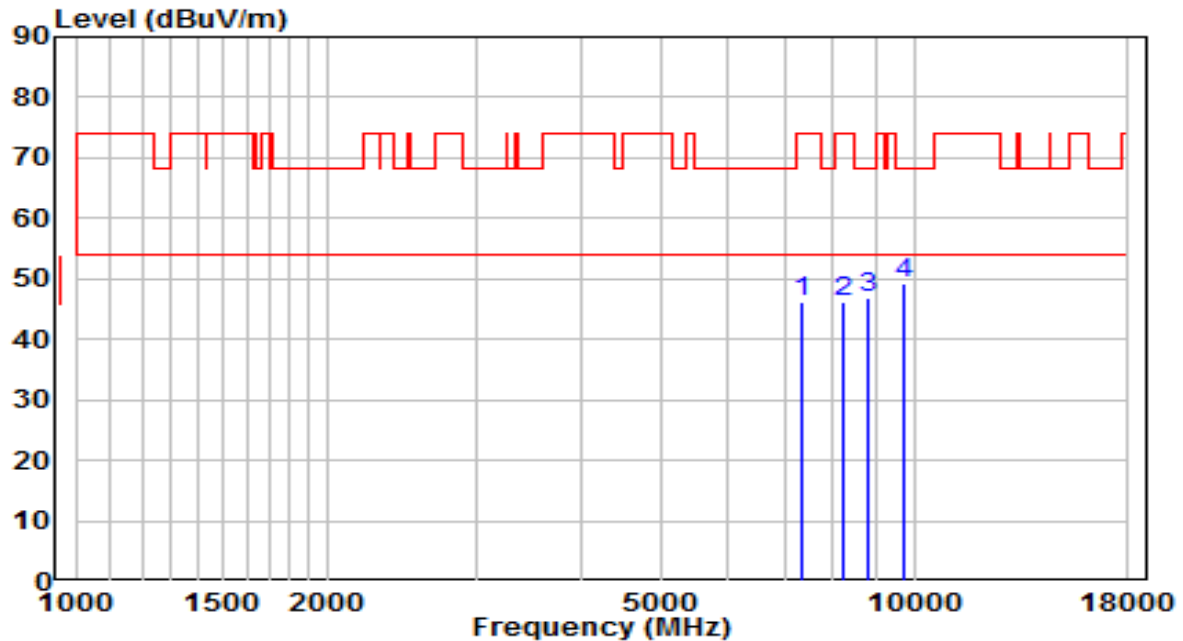


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7349.500	33.98	12.35	46.33	-27.67	74.00	Peak
2	8208.000	32.83	13.52	46.35	-27.65	74.00	Peak
3	8828.500	32.53	14.46	46.99	-21.21	68.20	Peak
4	* 9746.500	33.10	16.13	49.23	-18.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

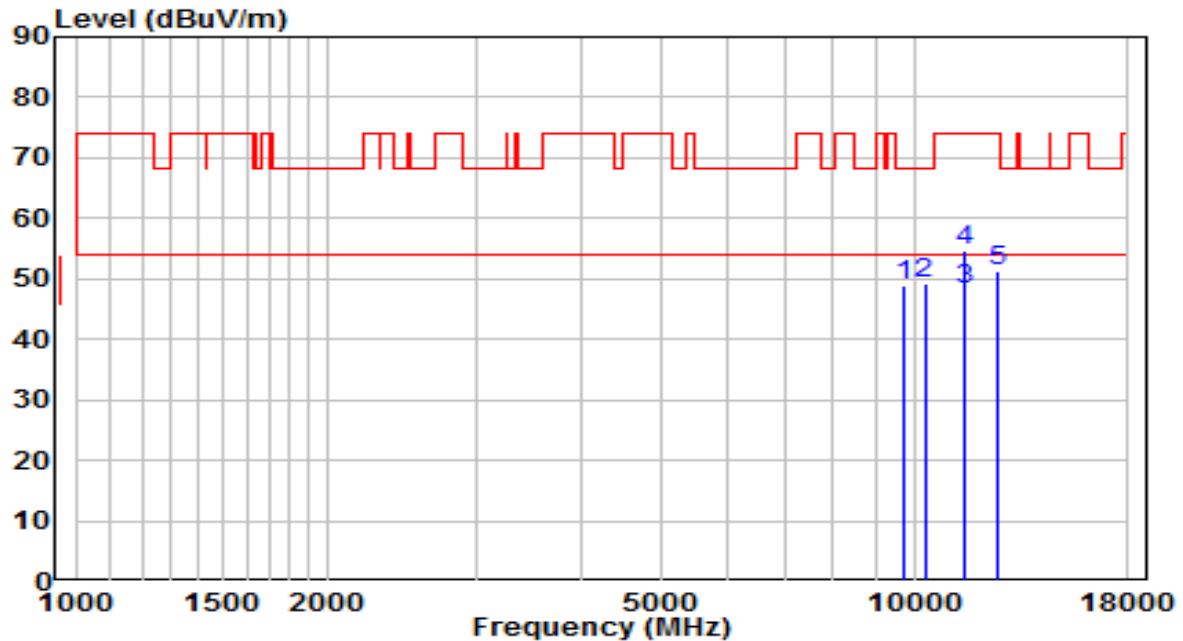


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9755.000	32.80	16.15	48.95	-19.25	68.20	Peak
2	10290.500	31.49	17.73	49.22	-18.98	68.20	Peak
3	* 11511.570	28.24	20.02	48.26	-5.74	54.00	Average
4	11514.500	34.70	20.02	54.72	-19.28	74.00	Peak
5	12611.000	32.57	18.73	51.30	-22.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

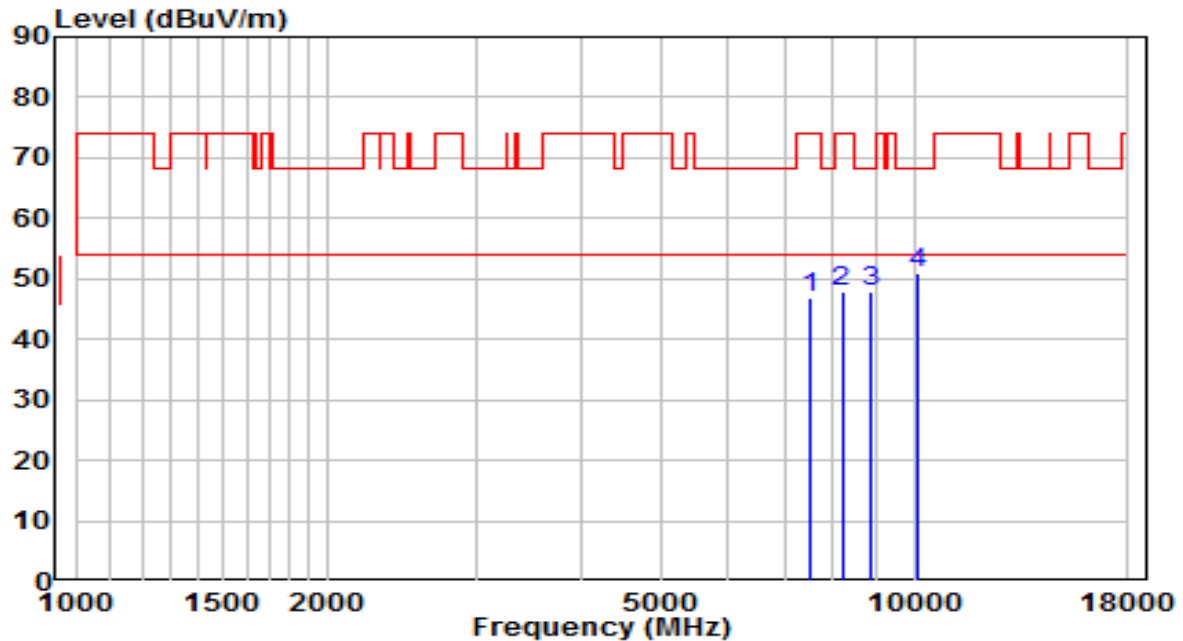


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7511.000	33.96	13.02	46.98	-27.02	74.00	Peak
2	8199.500	34.41	13.52	47.93	-26.07	74.00	Peak
3	8888.000	33.34	14.61	47.94	-20.26	68.20	Peak
4	* 10120.500	33.82	17.04	50.86	-17.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

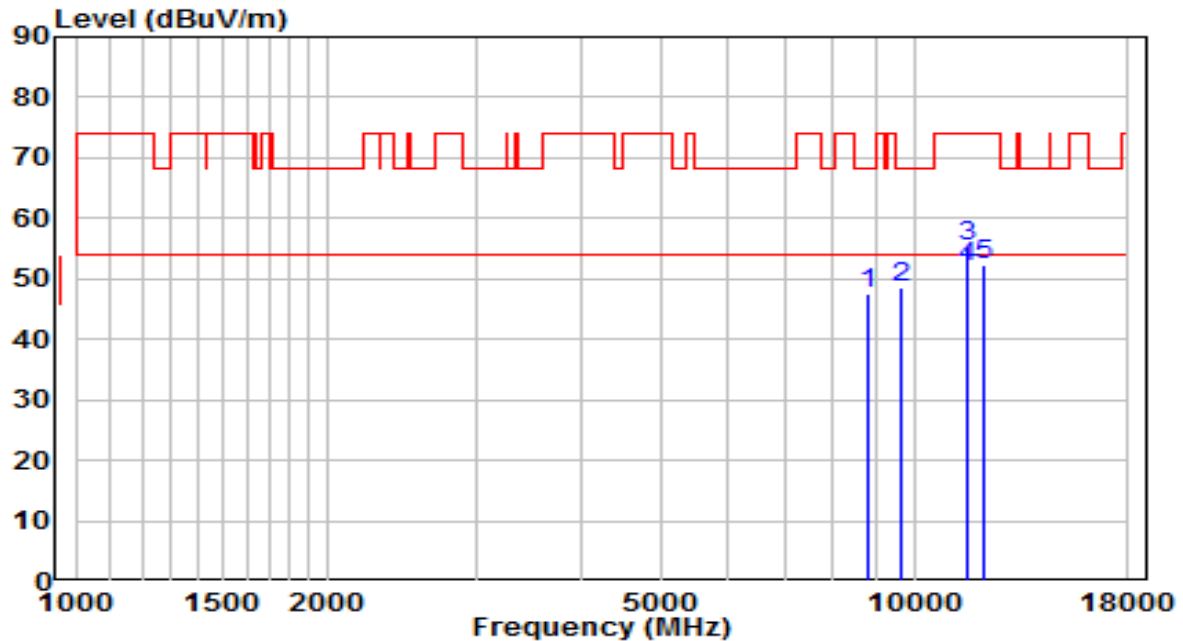


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8837.000	33.09	14.48	47.57	-20.63	68.20	Peak
2	9644.500	32.54	15.96	48.50	-19.70	68.20	Peak
3	11582.500	35.46	19.86	55.32	-18.68	74.00	Peak
4	* 11588.850	32.03	19.85	51.88	-2.12	54.00	Average
5	12152.000	33.62	18.76	52.38	-21.62	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

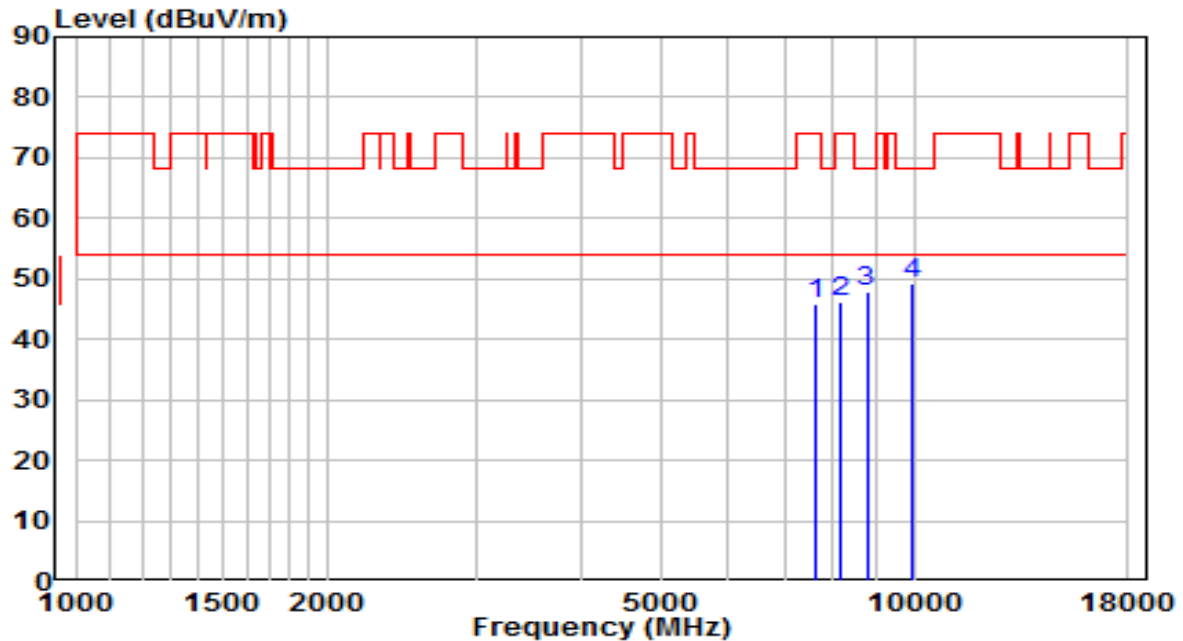


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	32.82	13.14	45.95	-28.05	74.00	Peak
2	8191.000	32.83	13.52	46.35	-27.65	74.00	Peak
3	8777.500	33.42	14.33	47.76	-20.44	68.20	Peak
4	* 9976.000	32.84	16.52	49.36	-18.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

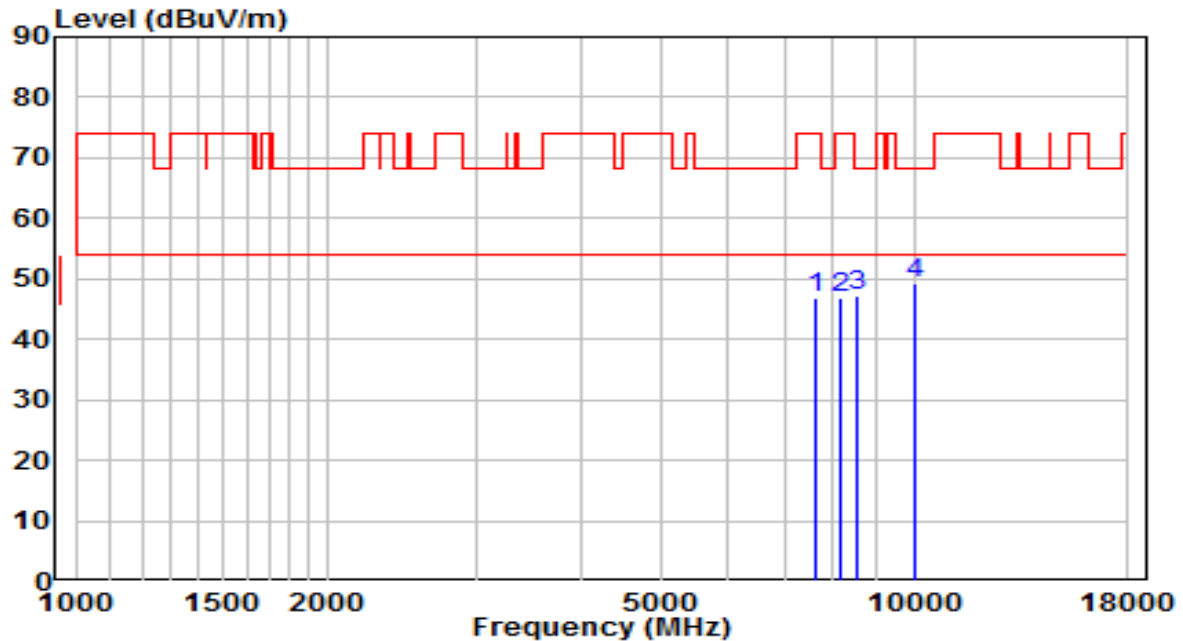


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7621.500	33.87	13.12	46.99	-27.01	74.00	Peak
2	8157.000	33.23	13.50	46.73	-27.27	74.00	Peak
3	8573.500	33.51	13.84	47.34	-20.86	68.20	Peak
4	* 10044.000	32.41	16.74	49.15	-19.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

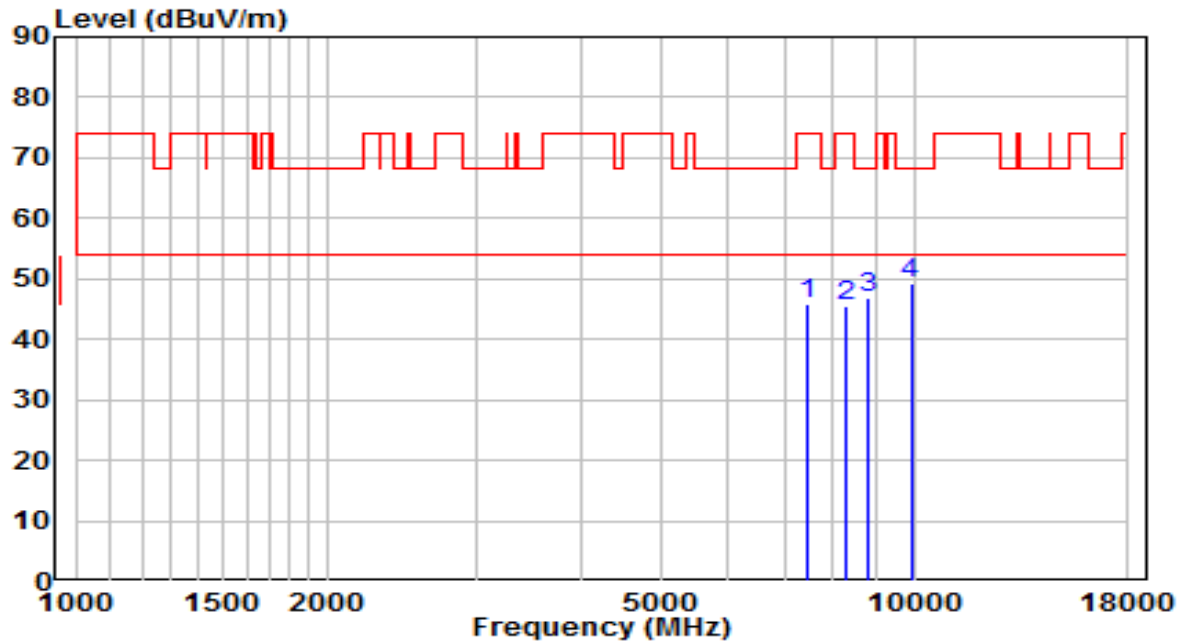


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7443.000	33.12	12.76	45.89	-28.11	74.00	Peak
2	8318.500	32.02	13.57	45.59	-28.41	74.00	Peak
3	8837.000	32.42	14.48	46.91	-21.29	68.20	Peak
4	* 9908.000	32.97	16.41	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

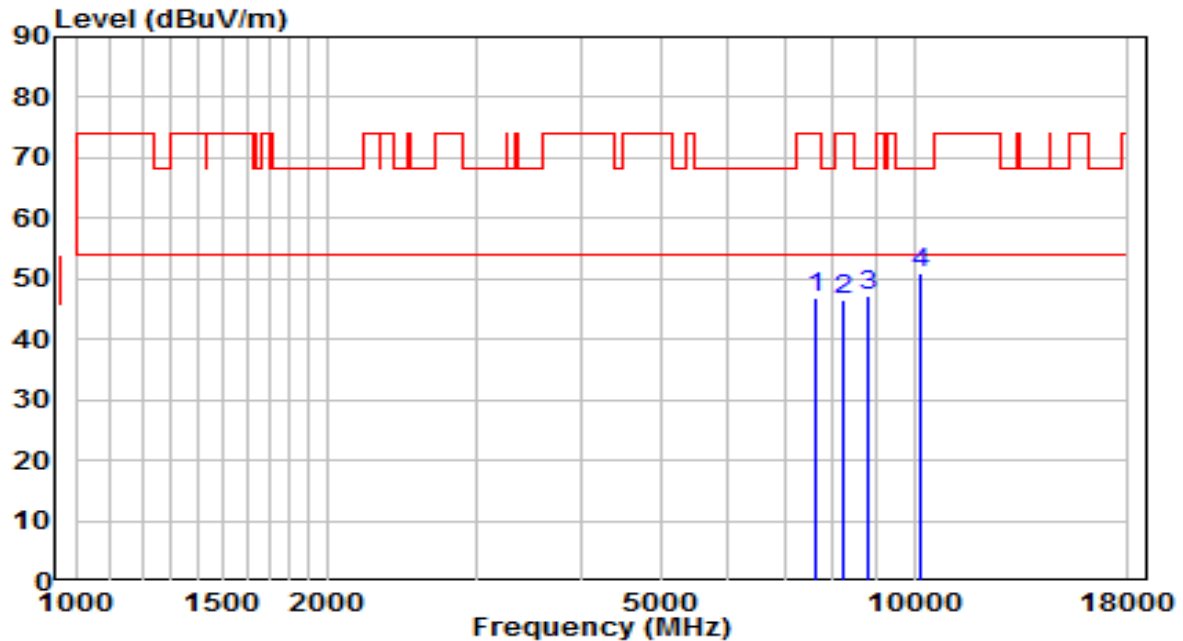


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	33.75	13.12	46.87	-27.13	74.00	Peak
2	8242.000	32.98	13.54	46.52	-27.48	74.00	Peak
3	8837.000	32.86	14.48	47.34	-20.86	68.20	Peak
4	* 10197.000	33.57	17.35	50.93	-17.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

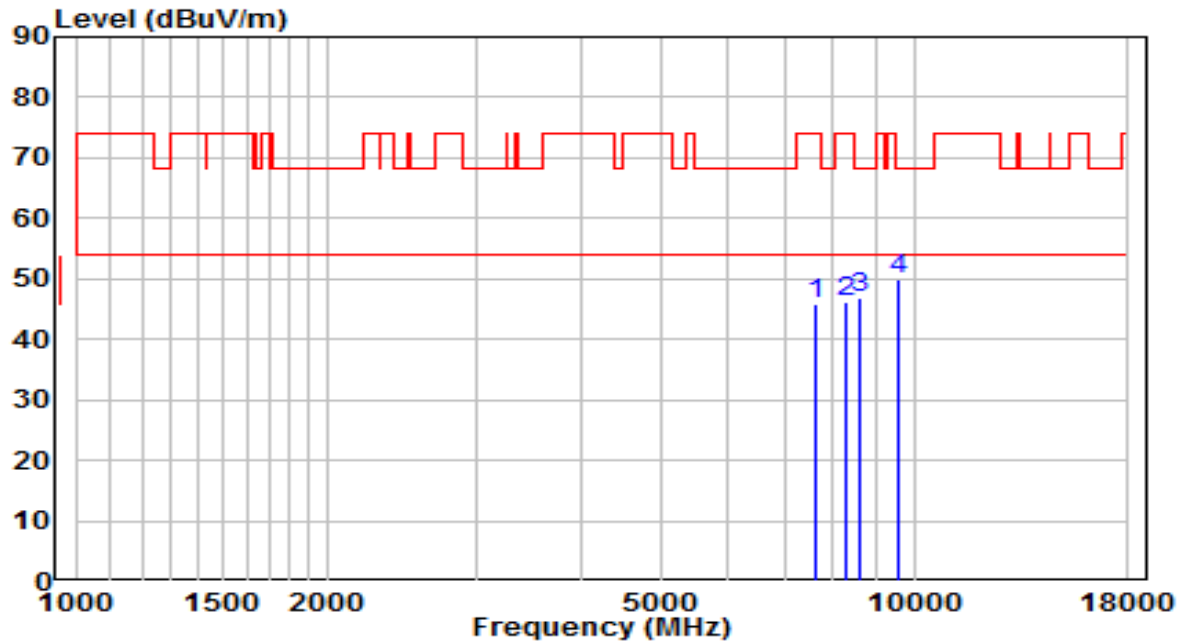


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	32.88	13.13	46.01	-27.99	74.00	Peak
2	8267.500	32.47	13.55	46.02	-27.98	74.00	Peak
3	8641.500	32.91	14.00	46.91	-21.29	68.20	Peak
4	* 9576.500	34.21	15.85	50.06	-18.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

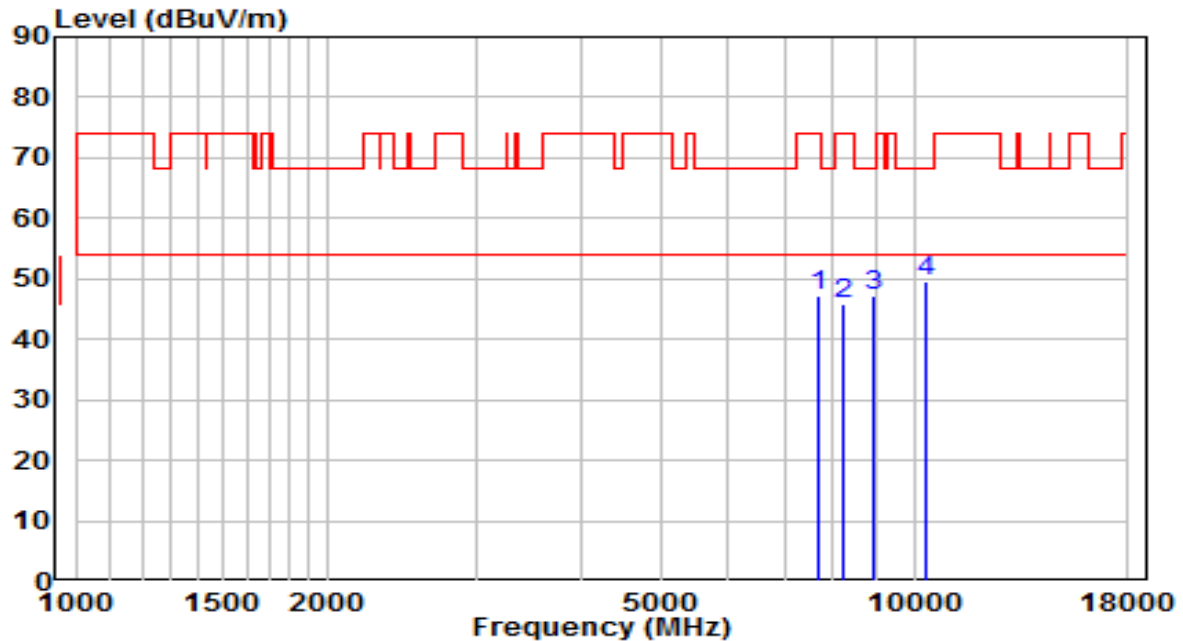


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	34.20	13.16	47.36	-26.64	74.00	Peak
2	8250.500	32.27	13.54	45.81	-28.19	74.00	Peak
3	8913.500	32.70	14.67	47.37	-20.83	68.20	Peak
4	* 10307.500	31.91	17.80	49.71	-18.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

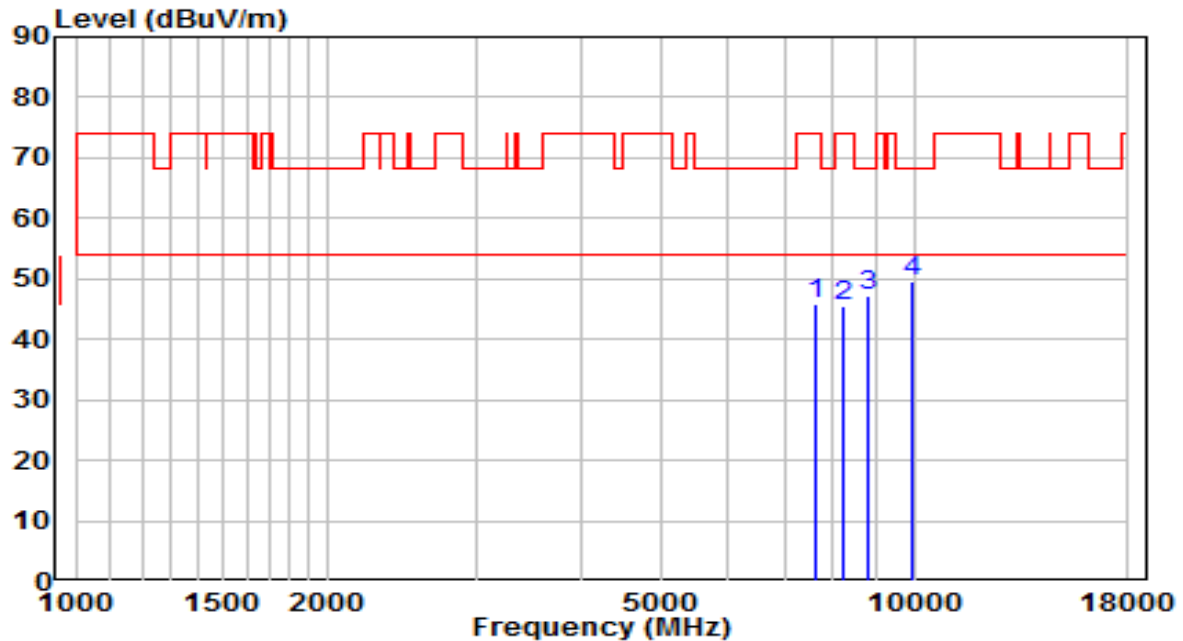


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	32.86	13.13	45.99	-28.01	74.00	Peak
2	8250.500	32.02	13.54	45.57	-28.43	74.00	Peak
3	8828.500	32.82	14.46	47.28	-20.92	68.20	Peak
4	* 9967.500	33.00	16.51	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

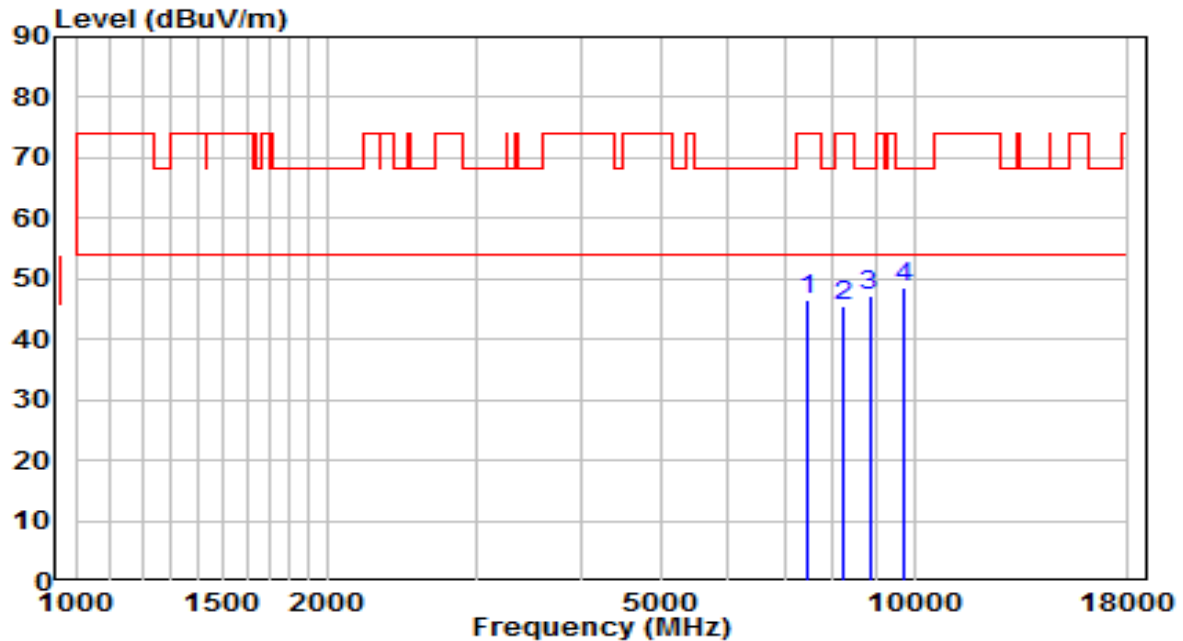


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7434.500	33.65	12.72	46.37	-27.63	74.00	Peak
2	8259.000	32.00	13.55	45.55	-28.45	74.00	Peak
3	8845.500	32.62	14.50	47.12	-21.08	68.20	Peak
4	* 9704.000	32.58	16.06	48.64	-19.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

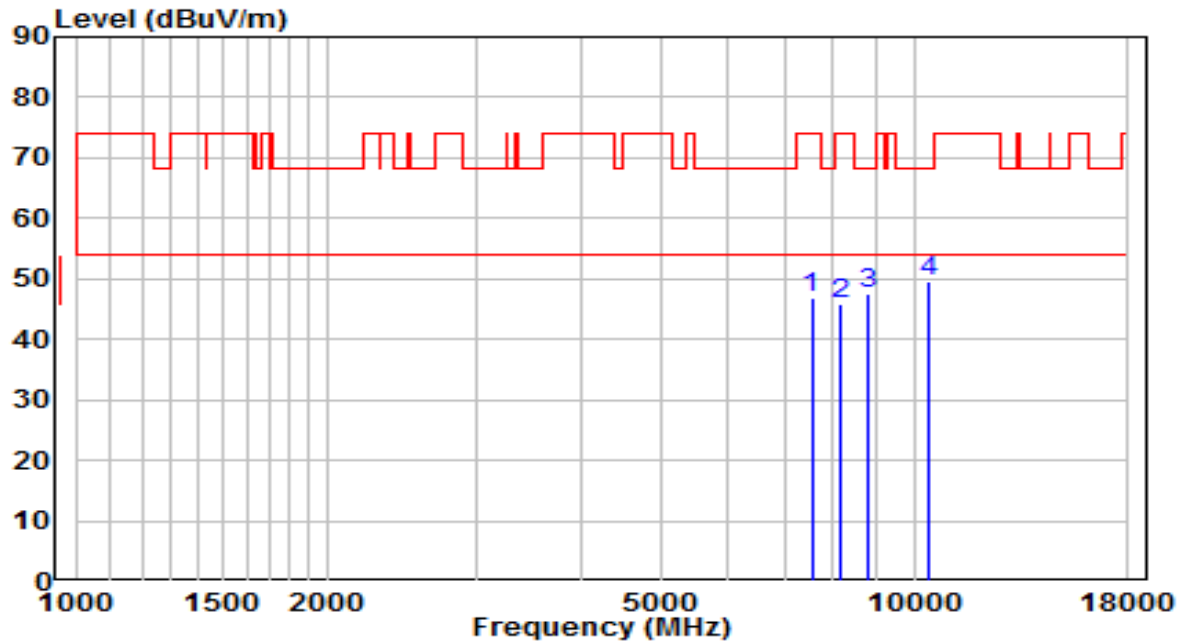


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.75	13.05	46.80	-27.20	74.00	Peak
2	8165.500	32.31	13.50	45.81	-28.19	74.00	Peak
3	8803.000	33.02	14.40	47.41	-20.79	68.20	Peak
4	* 10418.000	31.32	18.24	49.56	-18.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

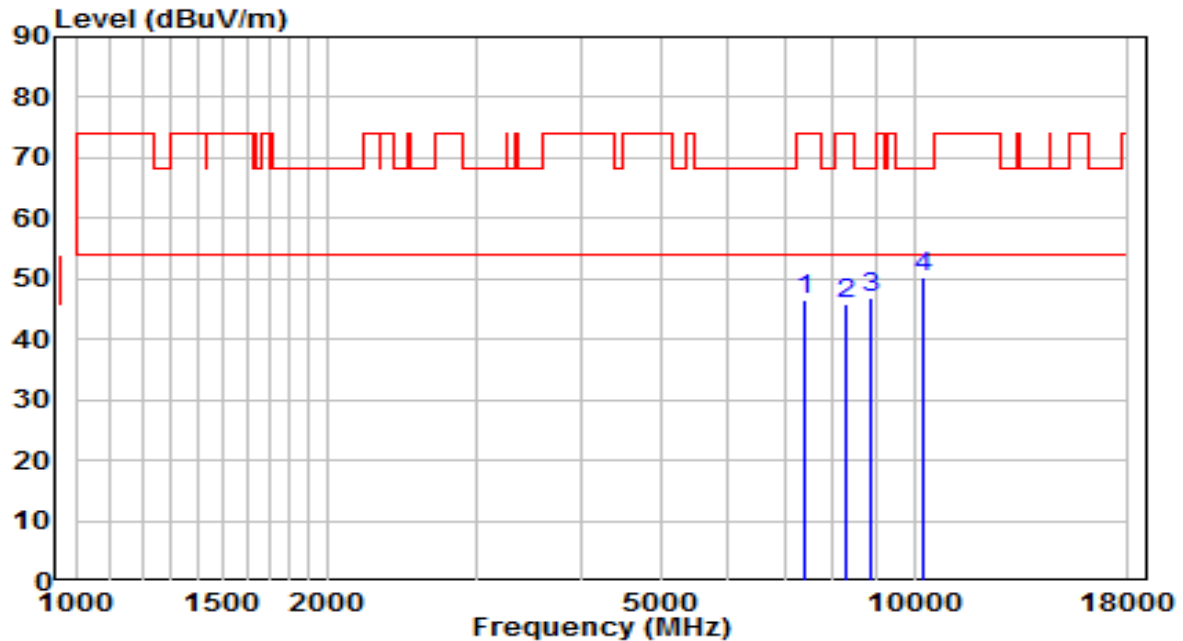


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7417.500	33.71	12.65	46.36	-27.64	74.00	Peak
2	8284.500	32.42	13.56	45.97	-28.03	74.00	Peak
3	8862.500	32.45	14.54	46.99	-21.21	68.20	Peak
4	* 10265.000	32.78	17.63	50.40	-17.80	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

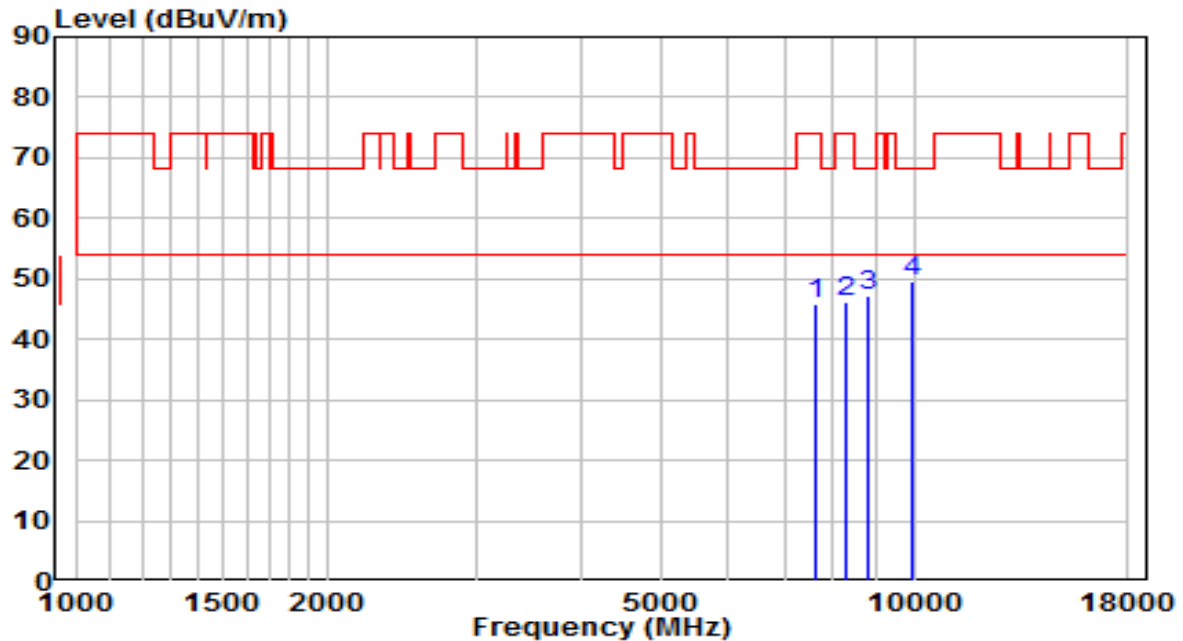


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7638.500	32.56	13.13	45.69	-28.31	74.00	Peak
2	8267.500	32.62	13.55	46.17	-27.83	74.00	Peak
3	8820.000	32.87	14.44	47.31	-20.89	68.20	Peak
4	* 9976.000	33.01	16.52	49.53	-18.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

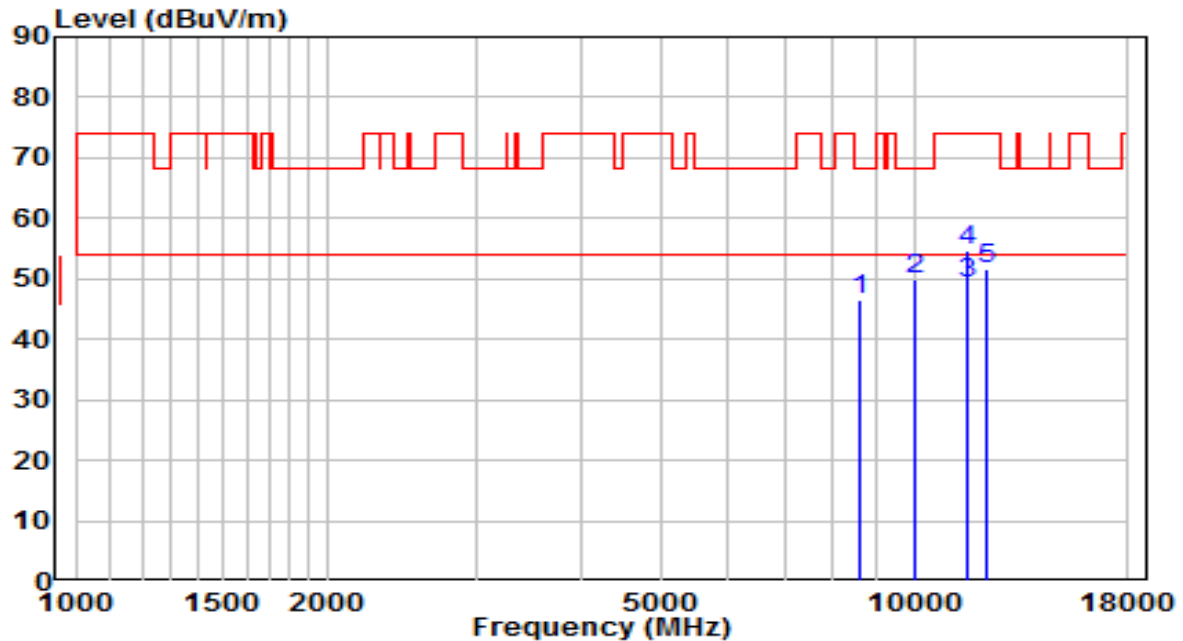


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8624.500	32.68	13.96	46.64	-21.56	68.20	Peak
2	10035.500	33.39	16.70	50.09	-18.11	68.20	Peak
3	* 11560.540	29.37	19.91	49.28	-4.72	54.00	Average
4	11565.500	34.83	19.90	54.73	-19.27	74.00	Peak
5	12186.000	32.75	18.73	51.48	-22.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 120V/60Hz

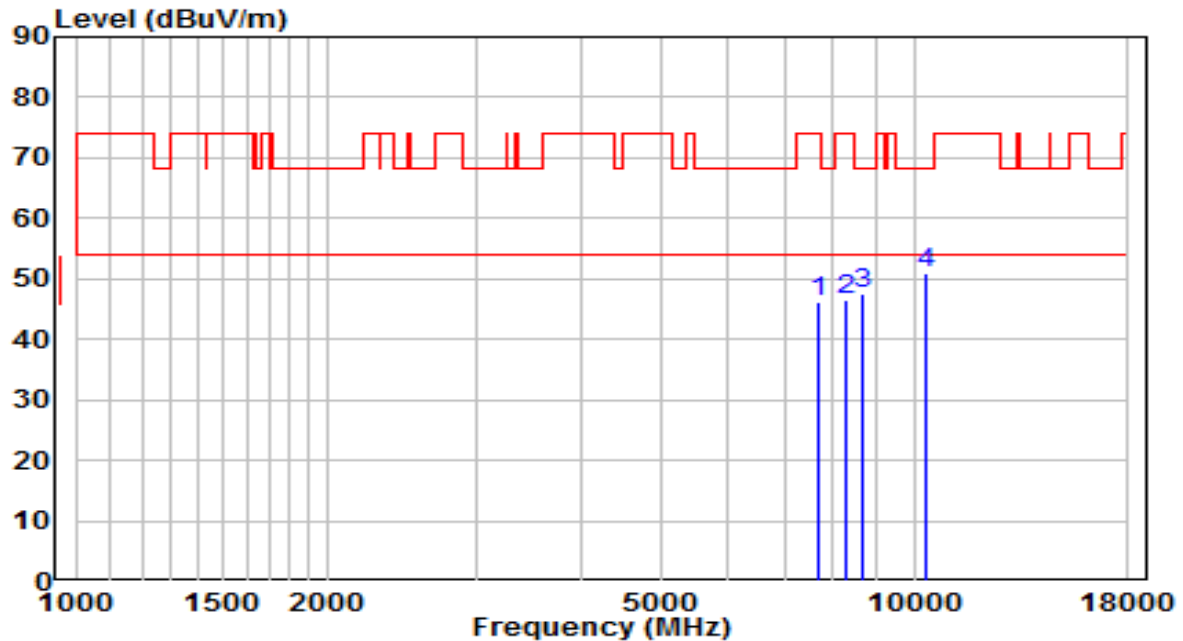


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	32.88	13.16	46.04	-27.96	74.00	Peak
2	8318.500	32.80	13.57	46.37	-27.63	74.00	Peak
3	8675.500	33.60	14.08	47.69	-20.51	68.20	Peak
4	* 10367.000	32.83	18.04	50.86	-17.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 120V/60Hz

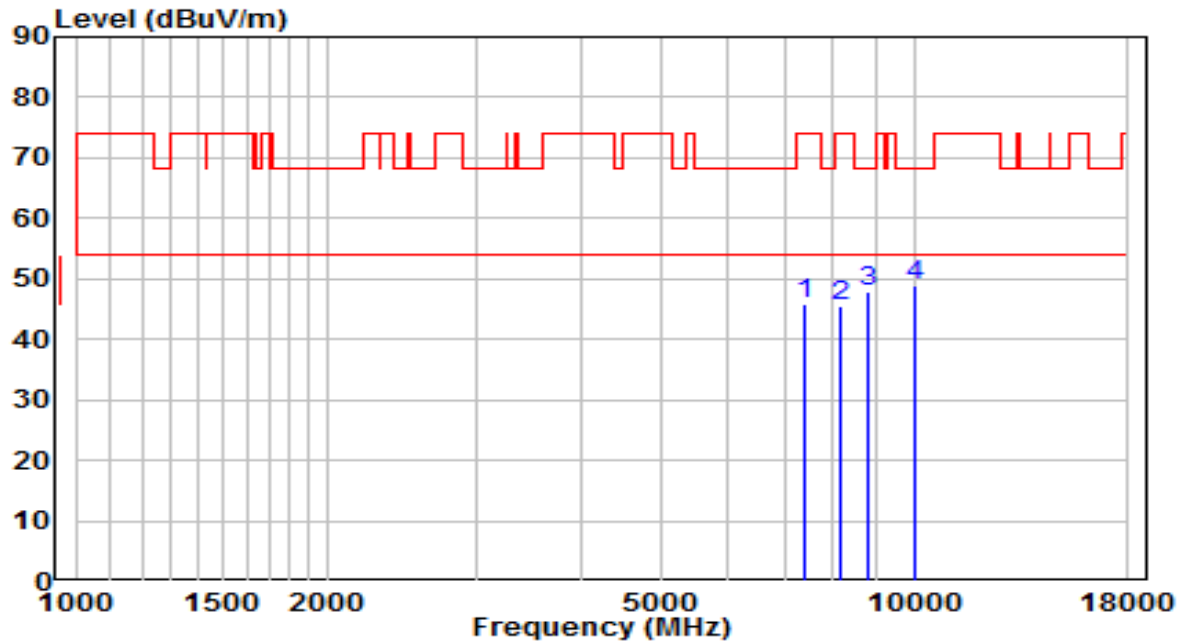


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7392.000	33.32	12.54	45.86	-28.14	74.00	Peak
2	8182.500	31.90	13.51	45.42	-28.58	74.00	Peak
3	8820.000	33.53	14.44	47.97	-20.23	68.20	Peak
4	* 10035.500	32.30	16.70	49.00	-19.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 120V/60Hz

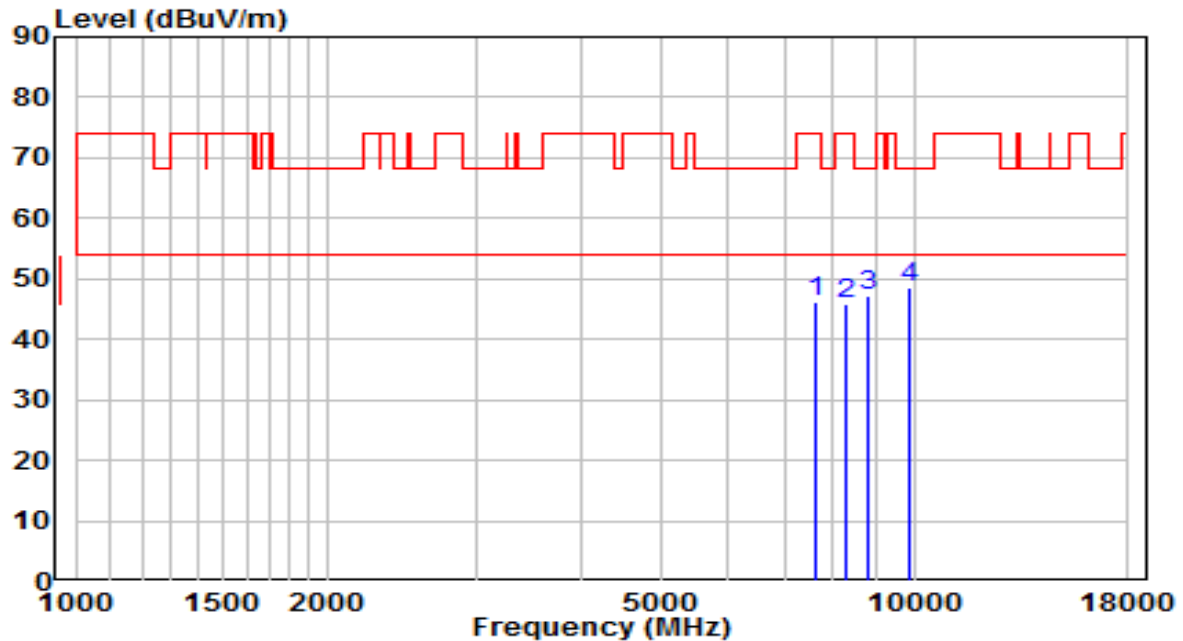


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	32.99	13.12	46.11	-27.89	74.00	Peak
2	8284.500	32.30	13.56	45.86	-28.14	74.00	Peak
3	8794.500	32.78	14.38	47.16	-21.04	68.20	Peak
4	* 9899.500	32.18	16.39	48.57	-19.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 120V/60Hz

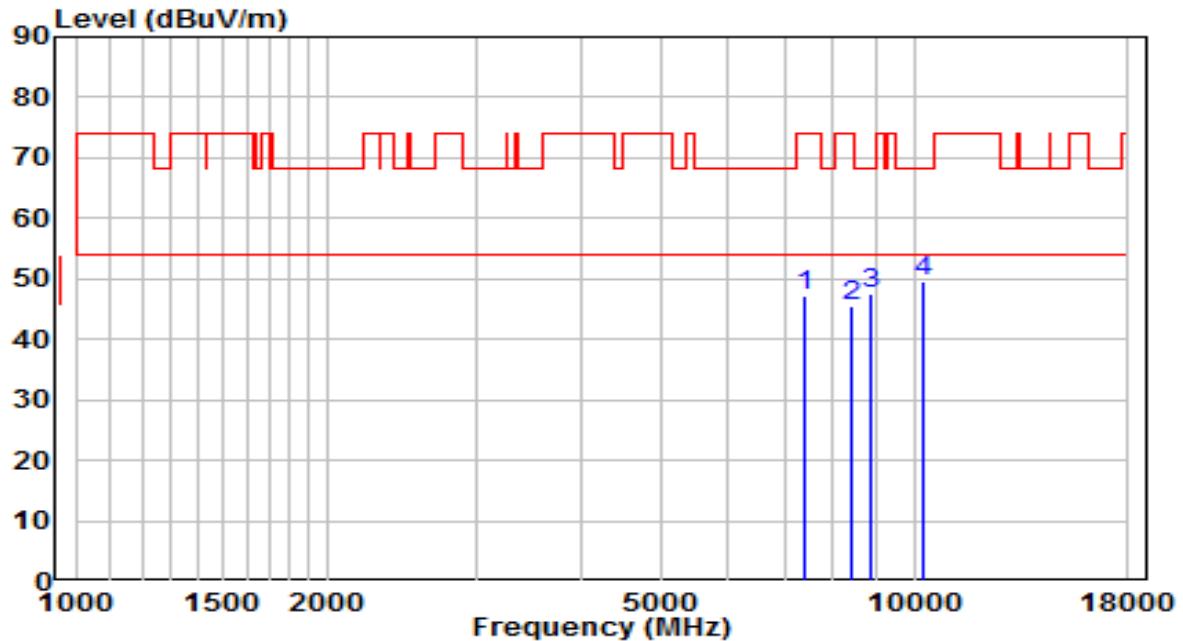


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7426.000	34.61	12.69	47.30	-26.70	74.00	Peak
2	8437.500	31.86	13.63	45.49	-28.51	74.00	Peak
3	8862.500	32.94	14.54	47.49	-20.71	68.20	Peak
4	* 10248.000	31.92	17.56	49.47	-18.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Worst Case of Radiated Emission below 1GHz:

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	VULB 9162	Temp. / Humidity	25.2°C /40%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	120V/60Hz

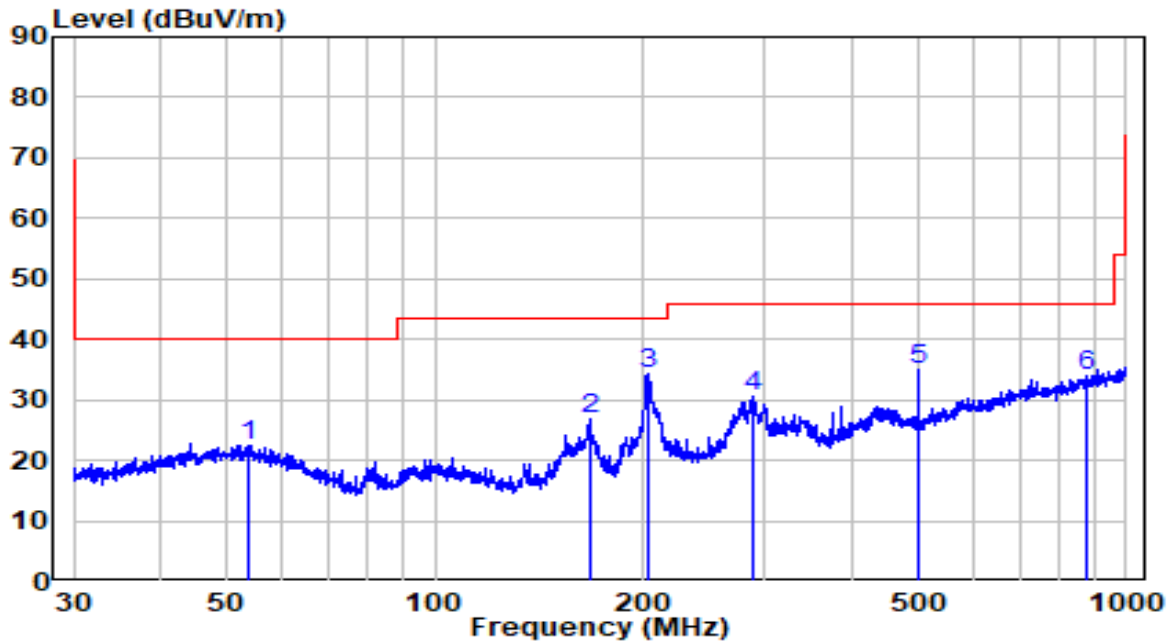


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	53.787	1.13	21.35	22.48	-17.52	40.00	Peak
2	167.237	10.22	16.56	26.78	-16.72	43.50	Peak
3	* 203.880	15.16	19.07	34.23	-9.27	43.50	Peak
4	287.486	9.36	21.21	30.57	-15.43	46.00	Peak
5	500.301	8.81	26.22	35.03	-10.97	46.00	Peak
6	876.783	2.38	31.64	34.02	-11.98	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	VULB 9162	Temp. / Humidity	25.2°C /40%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	120V/60Hz

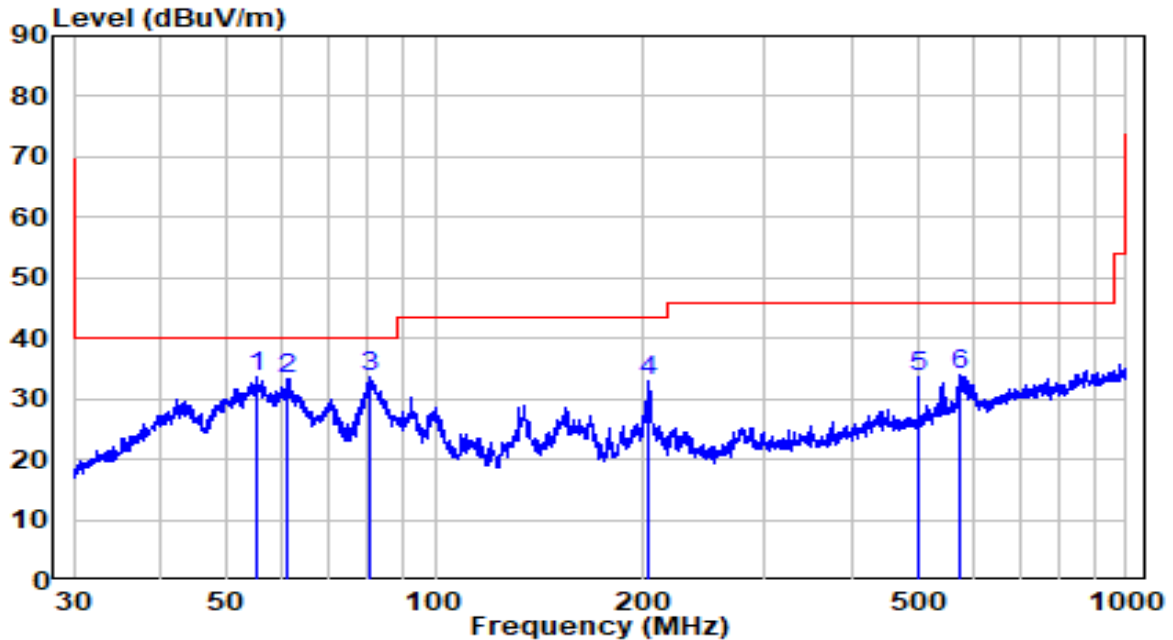

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	55.124	12.44	21.11	33.55	-6.45	40.00	Peak
2	61.239	13.40	19.81	33.21	-6.79	40.00	Peak
3	* 80.362	19.25	14.44	33.69	-6.31	40.00	Peak
4	203.523	13.78	19.09	32.87	-10.63	43.50	Peak
5	500.301	7.25	26.22	33.47	-12.53	46.00	Peak
6	573.619	6.74	27.28	34.02	-11.98	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBWIf the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4.Test Setup

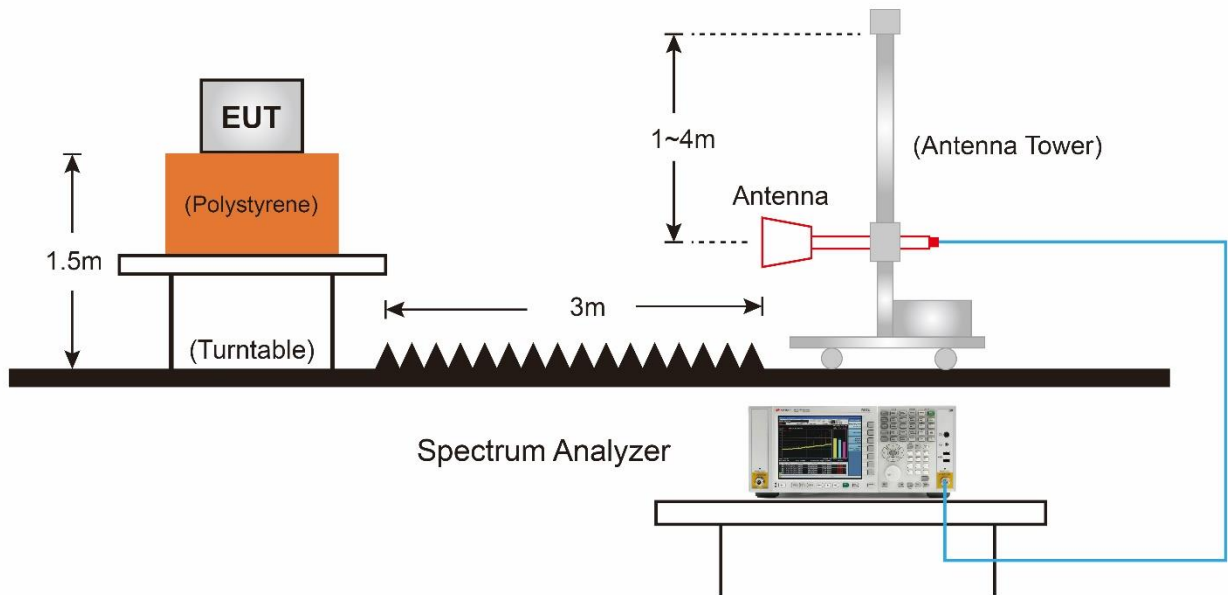

7.9.5.Test Result

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

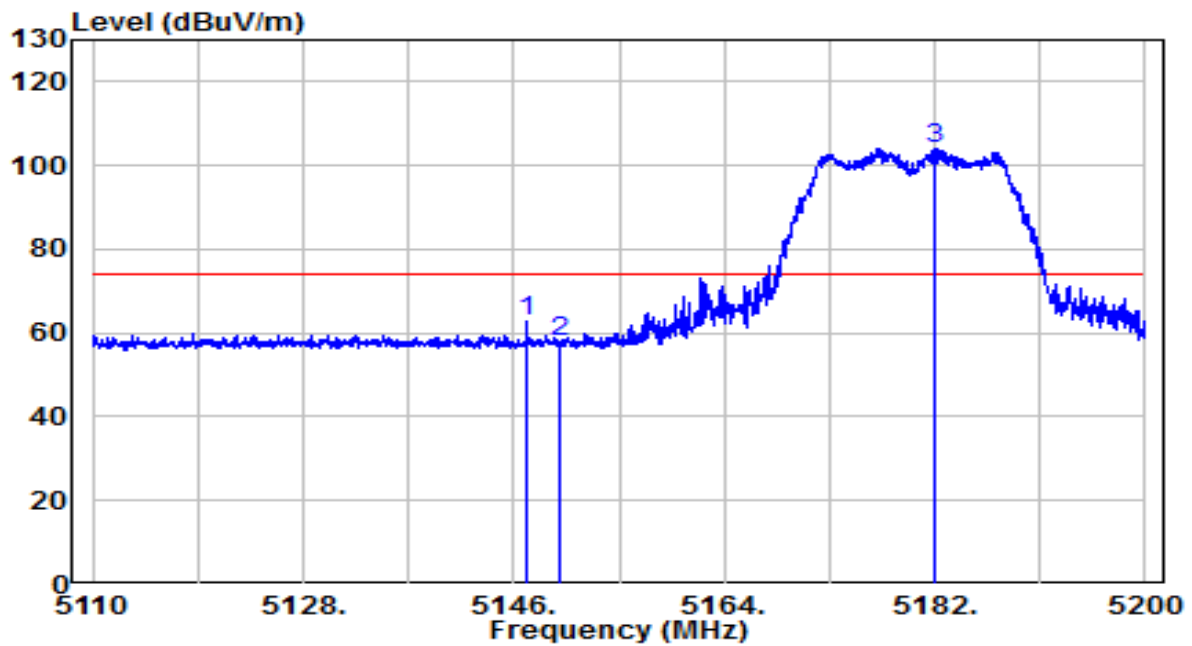


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.170	42.70	20.19	62.89	-11.11	74.00	Peak
2	5150.000	37.78	20.20	57.97	-16.03	74.00	Peak
3	* 5182.045	83.83	20.25	104.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

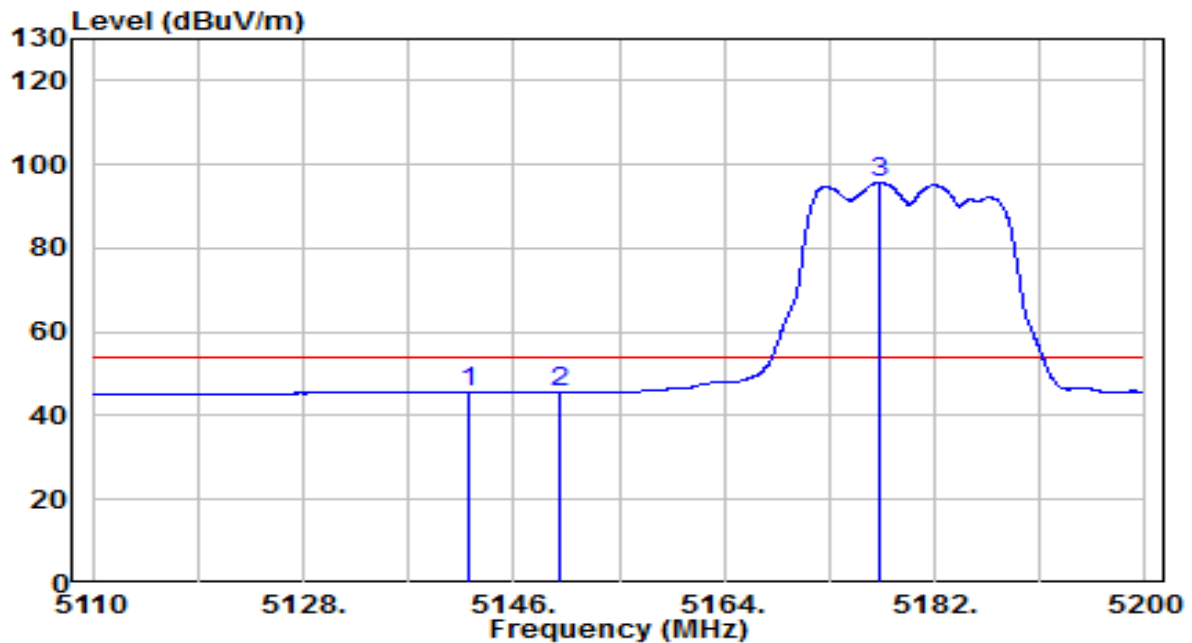


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.220	25.34	20.18	45.53	-8.47	54.00	Average
2	5150.000	25.20	20.20	45.40	-8.60	54.00	Average
3	* 5177.185	75.52	20.24	95.76	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

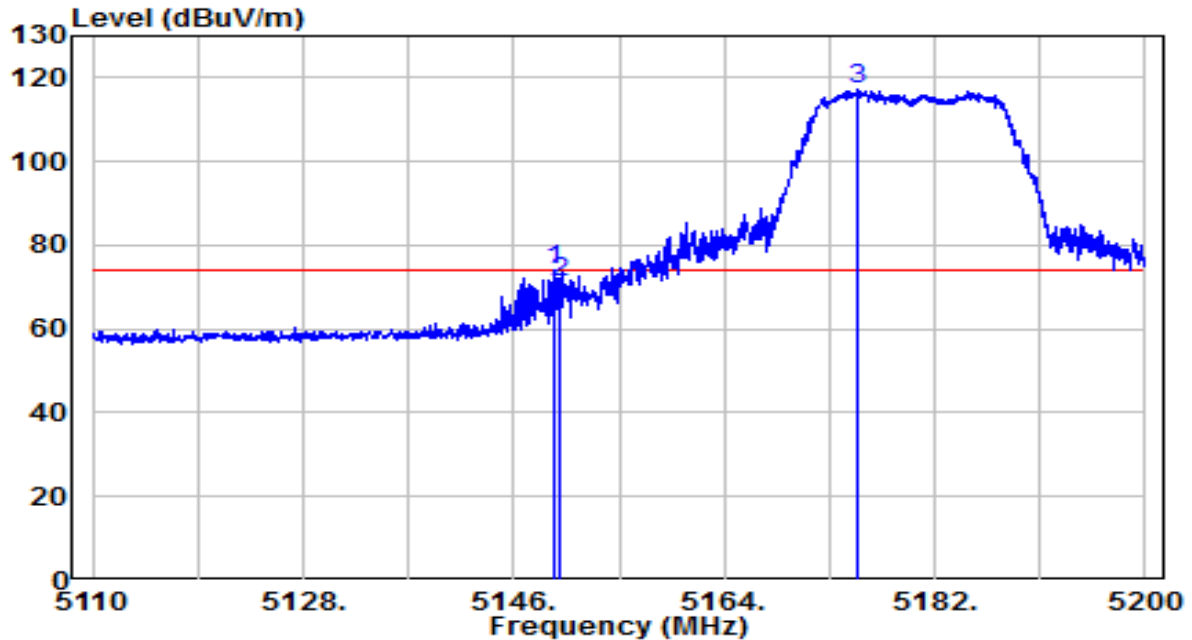


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.420	53.76	20.20	73.95	-0.05	74.00	Peak
2	5150.005	50.89	20.20	71.09	-2.91	74.00	Peak
3	* 5175.475	97.01	20.24	117.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

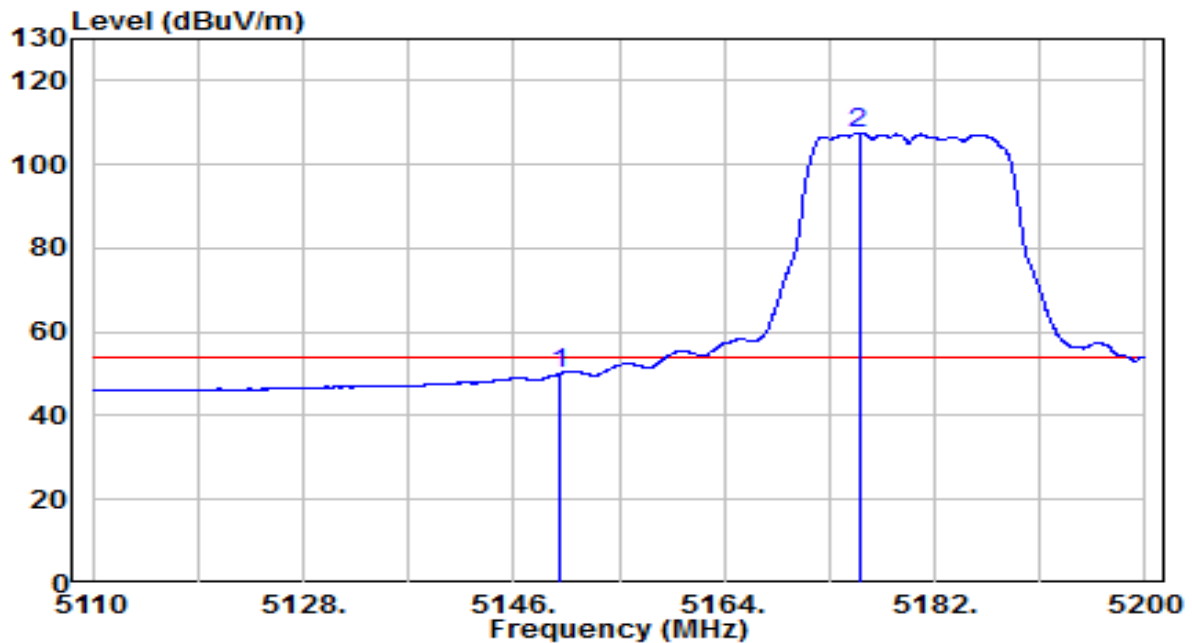


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5150.005	29.83	20.20	50.03	-3.97	54.00	Average
2	*	5175.520	87.32	20.24	107.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

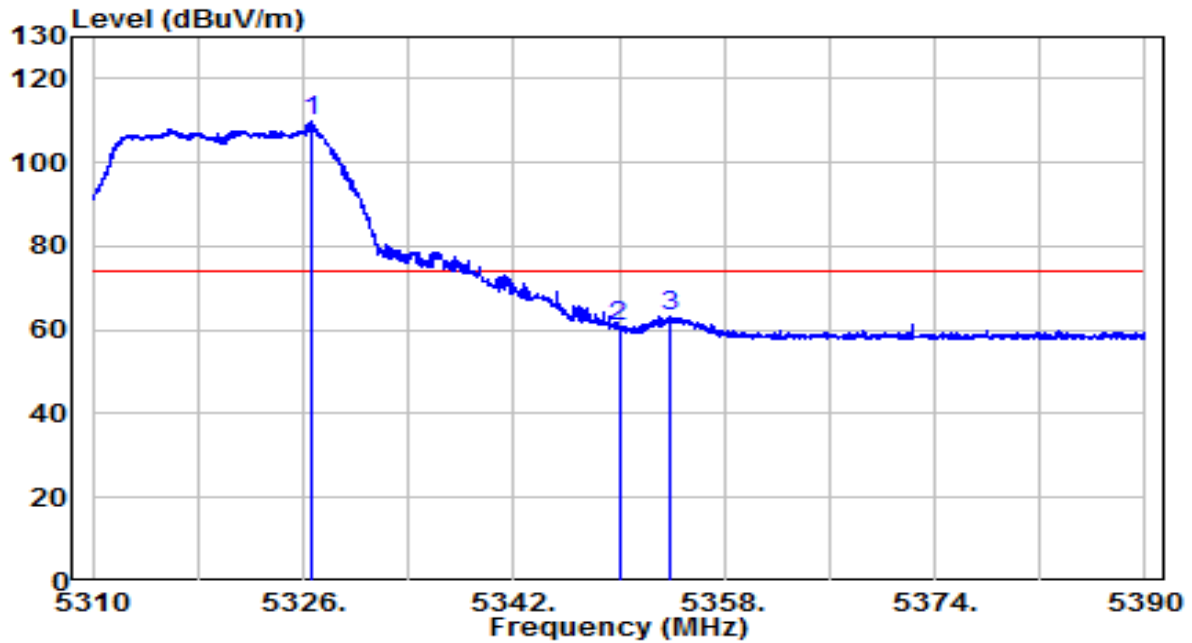


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5326.640	89.20	20.49	109.68	N/A	N/A	Peak
2		5350.000	40.34	20.52	60.87	-13.13	74.00	Peak
3		5353.840	42.66	20.53	63.19	-10.81	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

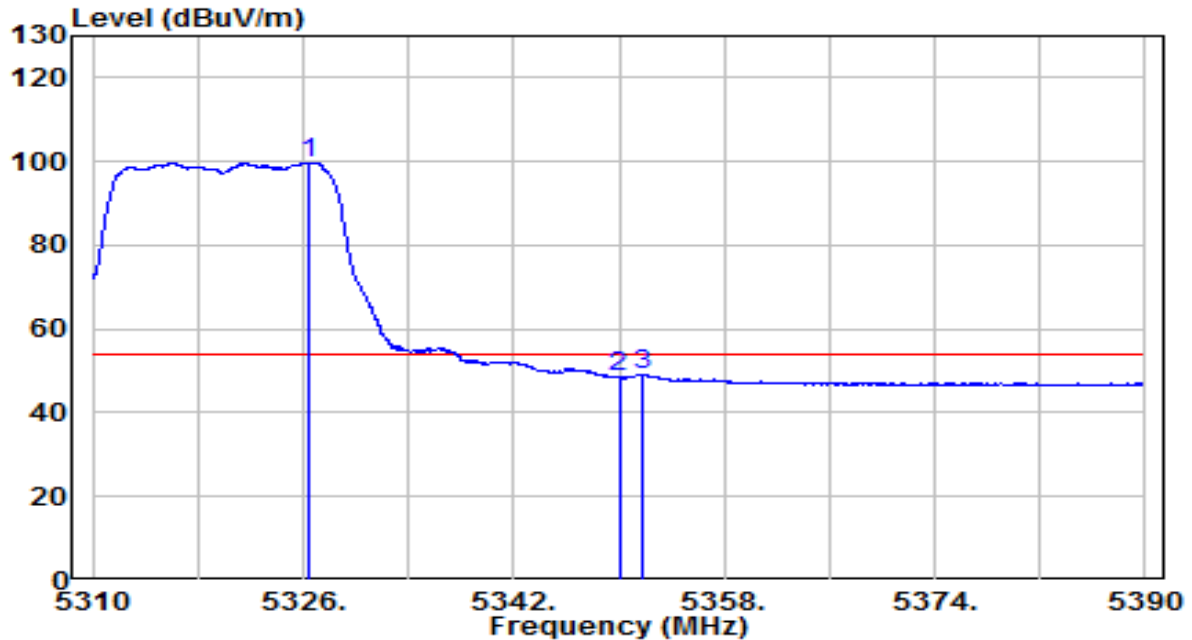


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5326.360	79.33	20.49	99.82	N/A	N/A	Average
2		5350.000	28.10	20.52	48.62	-5.38	54.00	Average
3		5351.760	28.60	20.53	49.12	-4.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

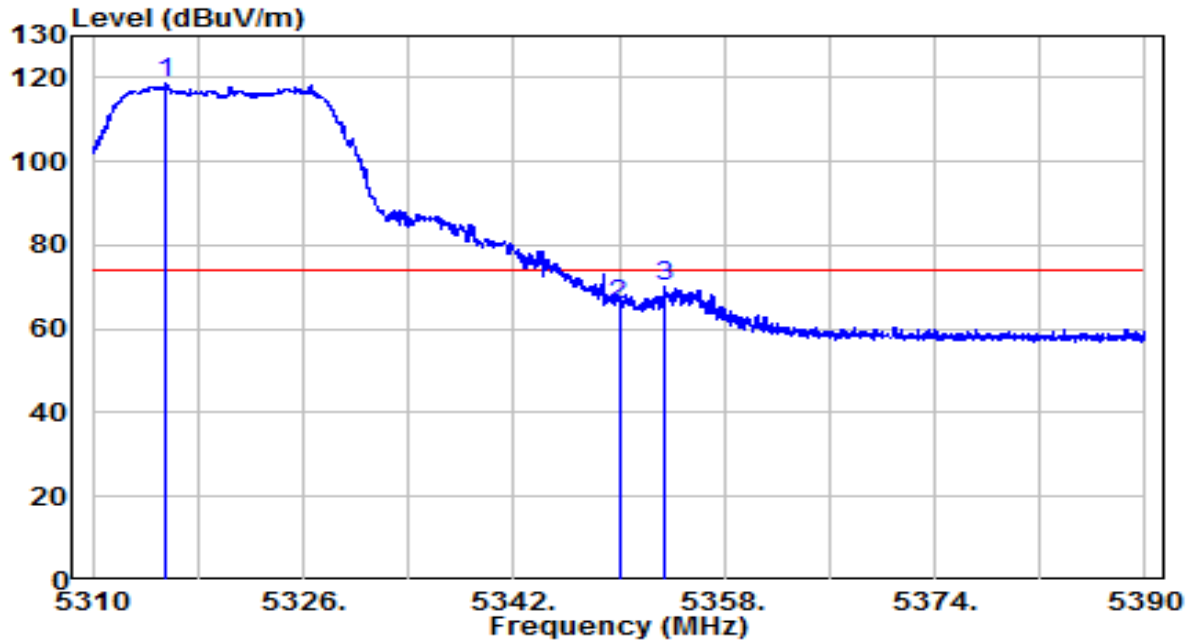


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5315.600	98.08	20.47	118.55	N/A	N/A	Peak
2		5350.000	45.29	20.52	65.81	-8.19	74.00	Peak
3		5353.560	49.53	20.53	70.06	-3.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

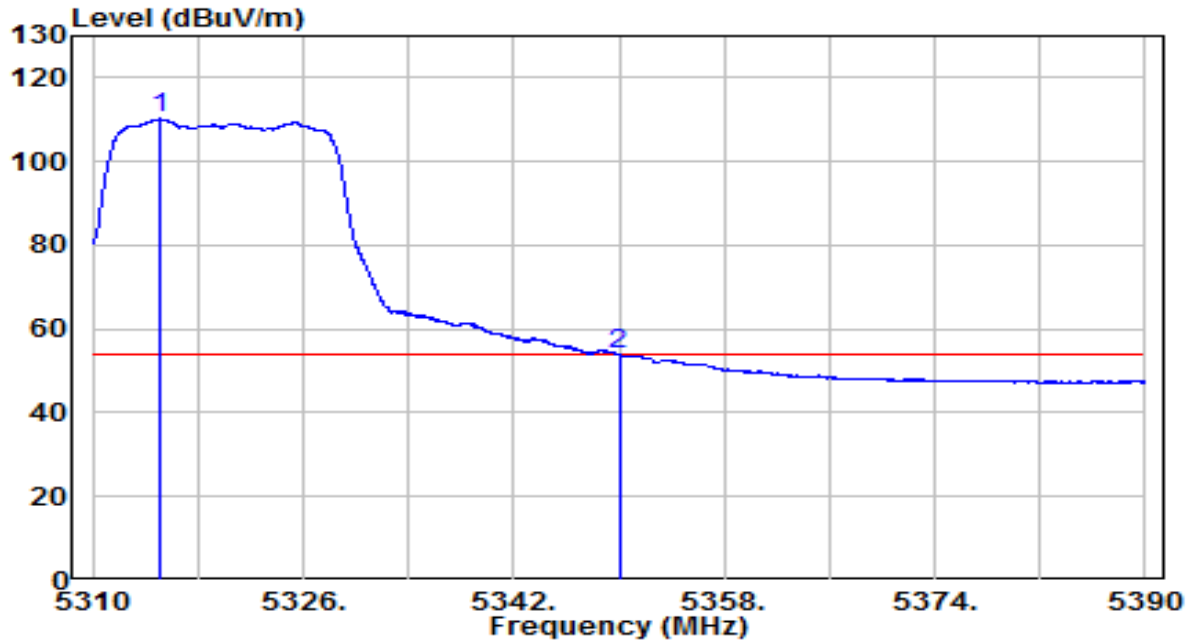


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5315.040	89.69	20.47	110.16	N/A	N/A	Average
2		5350.000	33.30	20.52	53.82	-0.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

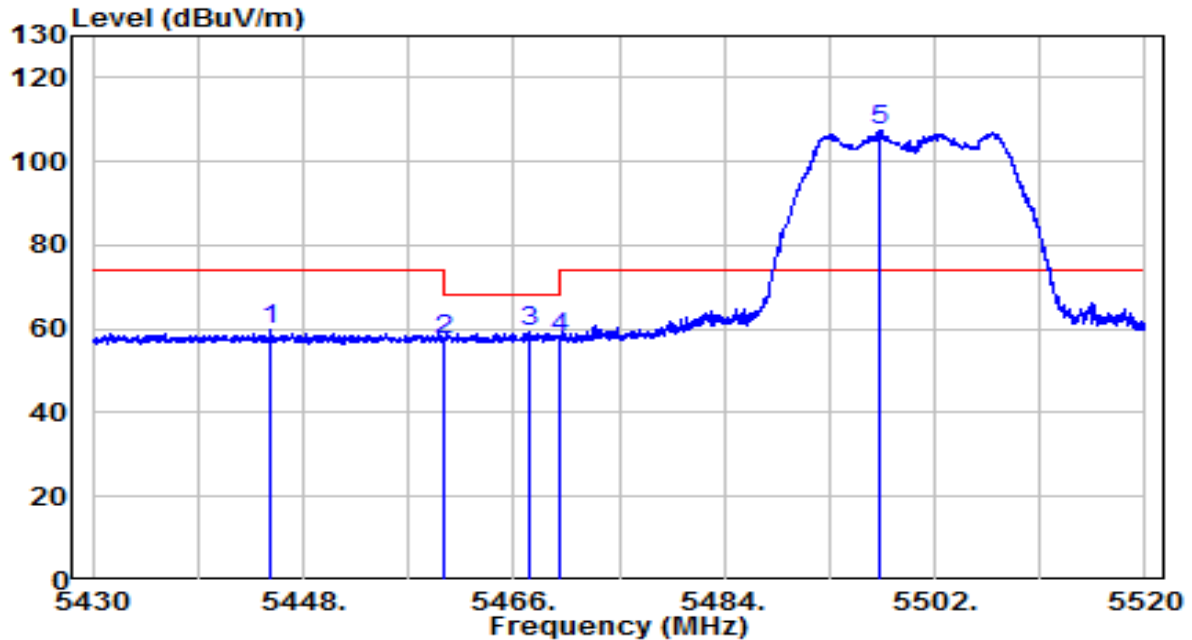


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5445.120	38.99	20.68	59.67	-14.33	74.00	Peak
2	5460.000	36.91	20.70	57.62	-10.58	68.20	Peak
3	5467.350	38.60	20.72	59.32	-8.88	68.20	Peak
4	5470.000	37.00	20.72	57.72	-10.48	68.20	Peak
5	* 5497.365	86.66	20.77	107.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

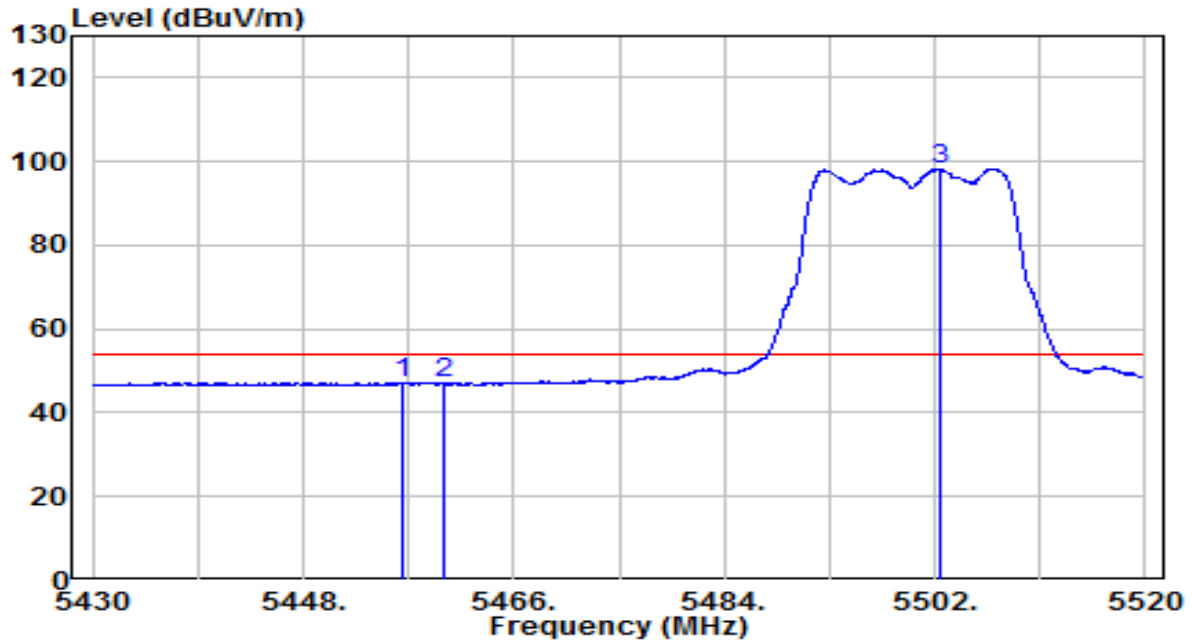


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.505	26.50	20.70	47.20	-6.80	54.00	Average
2	5460.015	26.26	20.70	46.96	-7.04	54.00	Average
3	* 5502.405	77.49	20.78	98.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

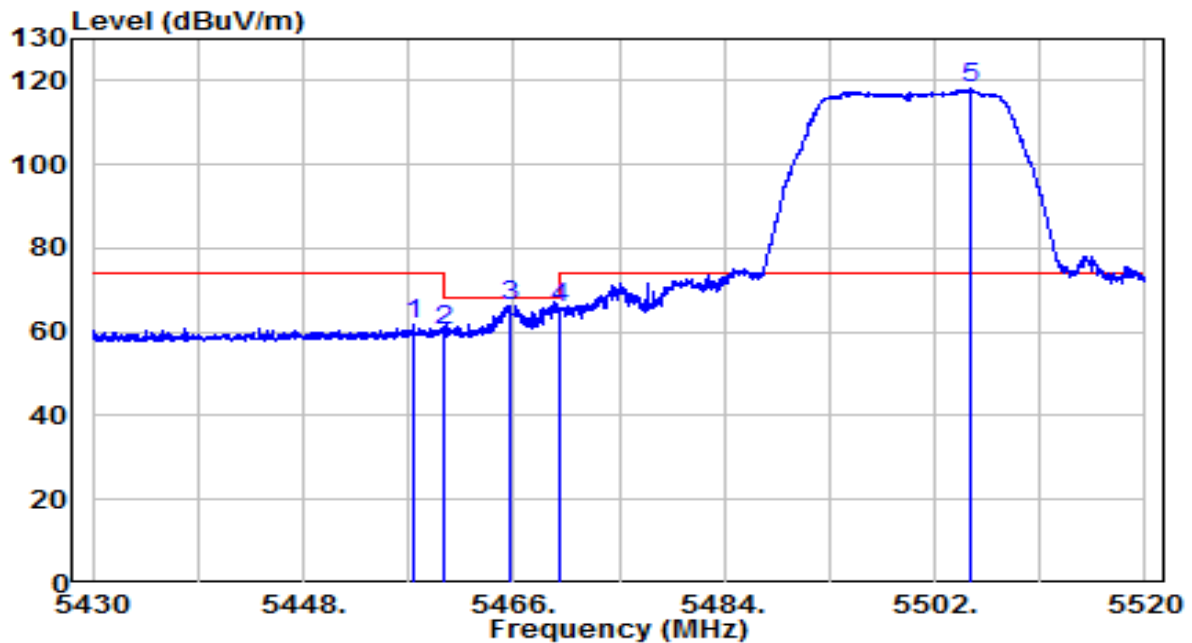


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5457.450	41.12	20.70	61.82	-12.18	74.00	Peak
2	5460.000	39.59	20.70	60.30	-7.90	68.20	Peak
3	5465.595	45.38	20.71	66.10	-2.10	68.20	Peak
4	5470.000	44.83	20.72	65.55	-2.65	68.20	Peak
5	* 5504.970	97.30	20.79	118.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

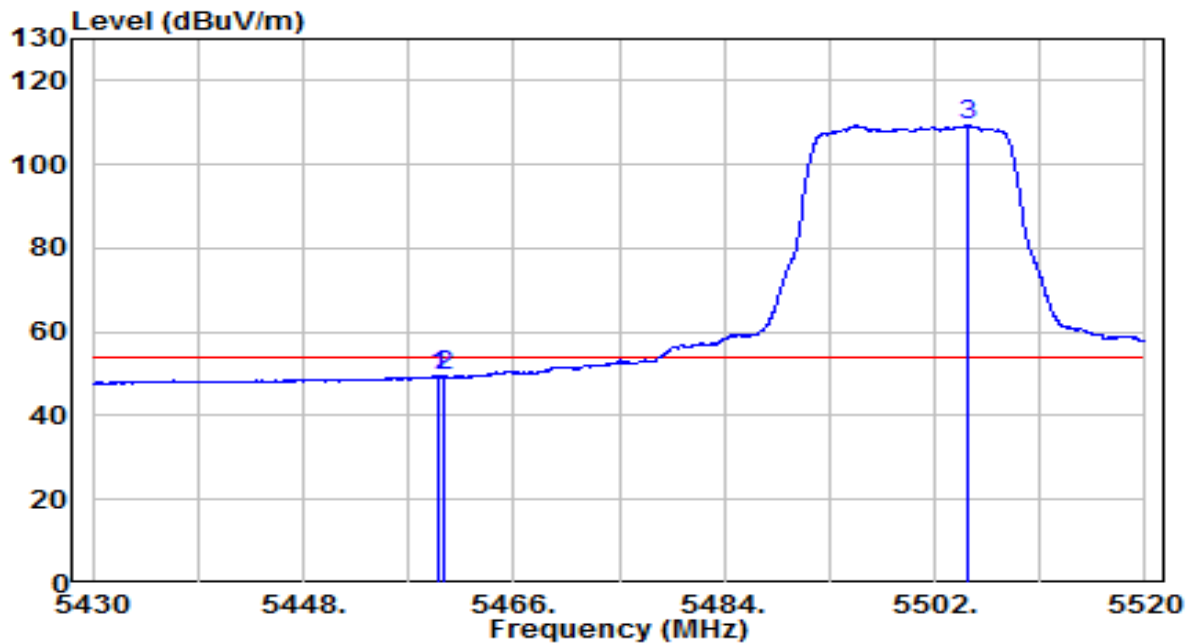


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.655	28.79	20.70	49.50	-4.50	54.00	Average
2	5460.015	28.60	20.70	49.30	-4.70	54.00	Average
3	* 5504.835	88.51	20.79	109.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	120V/60Hz

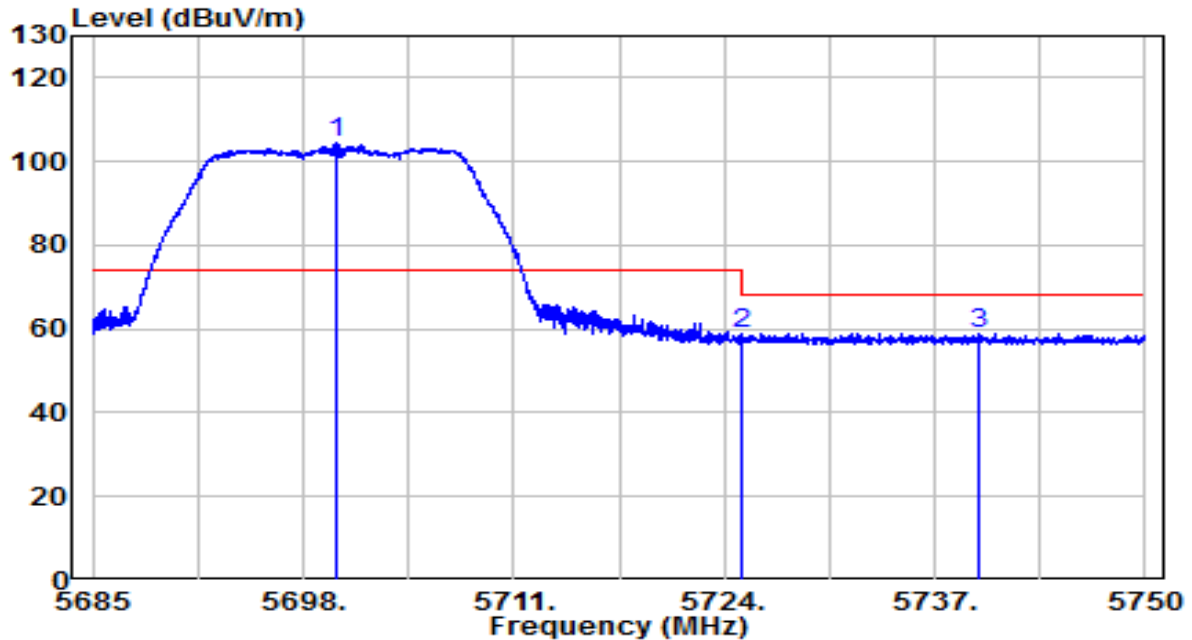


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5700.015	82.75	21.50	104.25	N/A	N/A	Peak
2		5725.000	37.08	21.59	58.67	-9.53	68.20	Peak
3		5739.665	37.40	21.64	59.04	-9.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	120V/60Hz

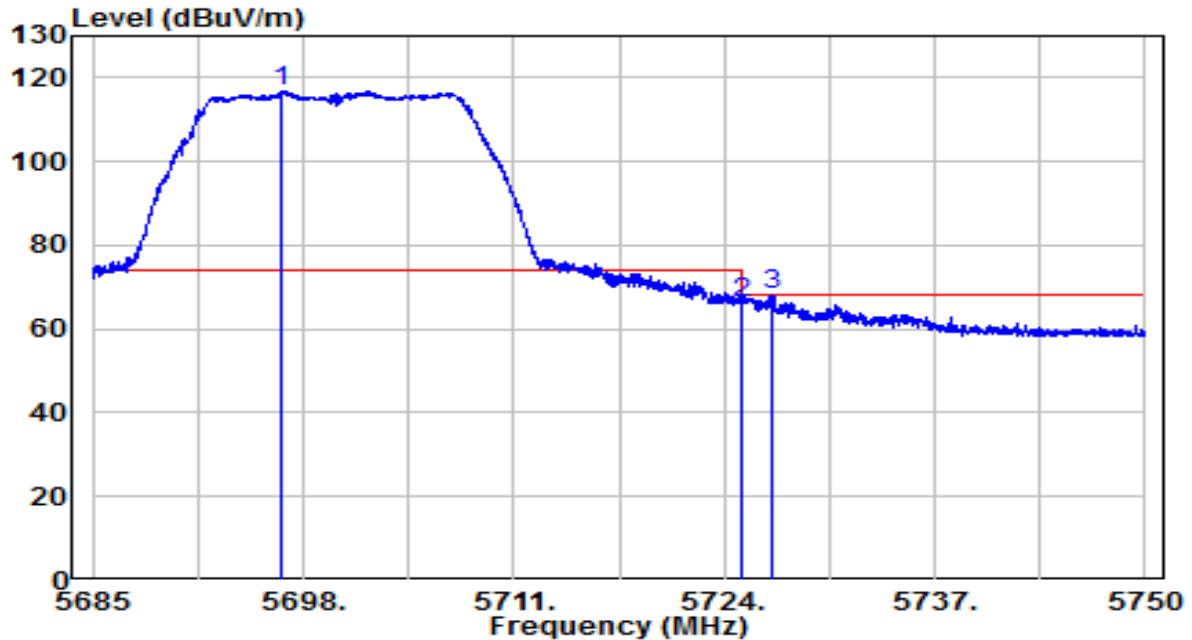


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5696.667	95.25	21.49	116.74	N/A	N/A	Peak
2		5725.000	44.53	21.59	66.12	-2.08	68.20	Peak
3		5726.893	46.43	21.60	68.03	-0.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

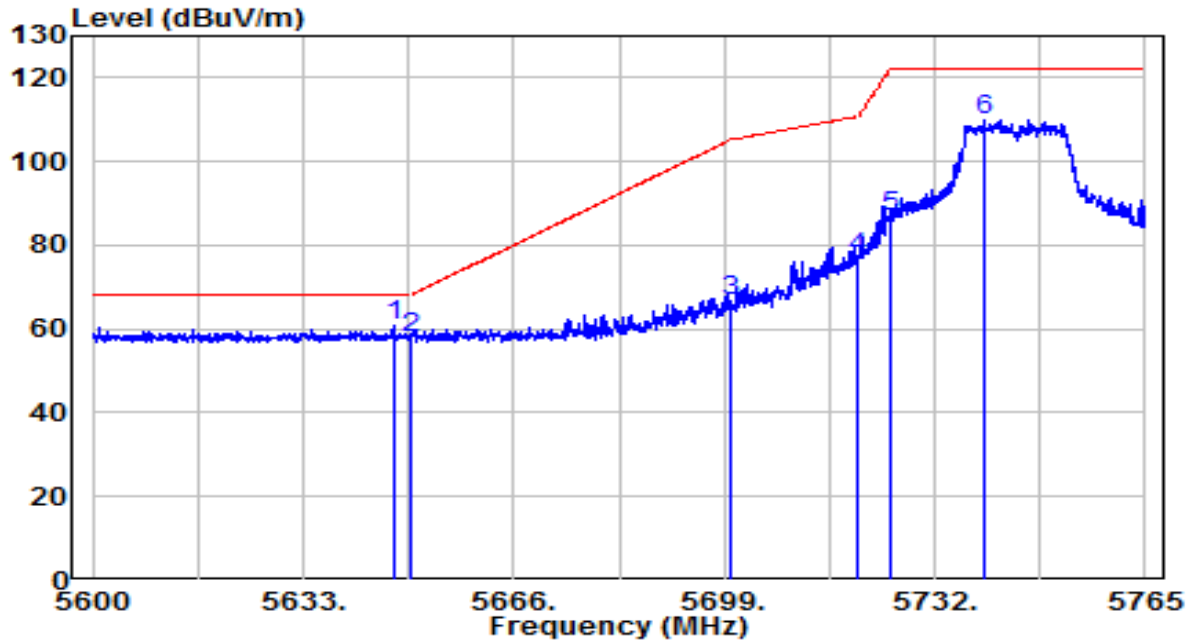


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5647.107	39.41	21.31	60.72	-7.48	68.20	Peak
2		5650.000	36.72	21.32	58.03	-10.17	68.20	Peak
3		5700.000	45.32	21.50	66.82	-38.38	105.20	Peak
4		5720.000	55.44	21.57	77.01	-33.79	110.80	Peak
5		5725.000	65.08	21.59	86.67	-35.53	122.20	Peak
6		5739.755	88.44	21.64	110.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

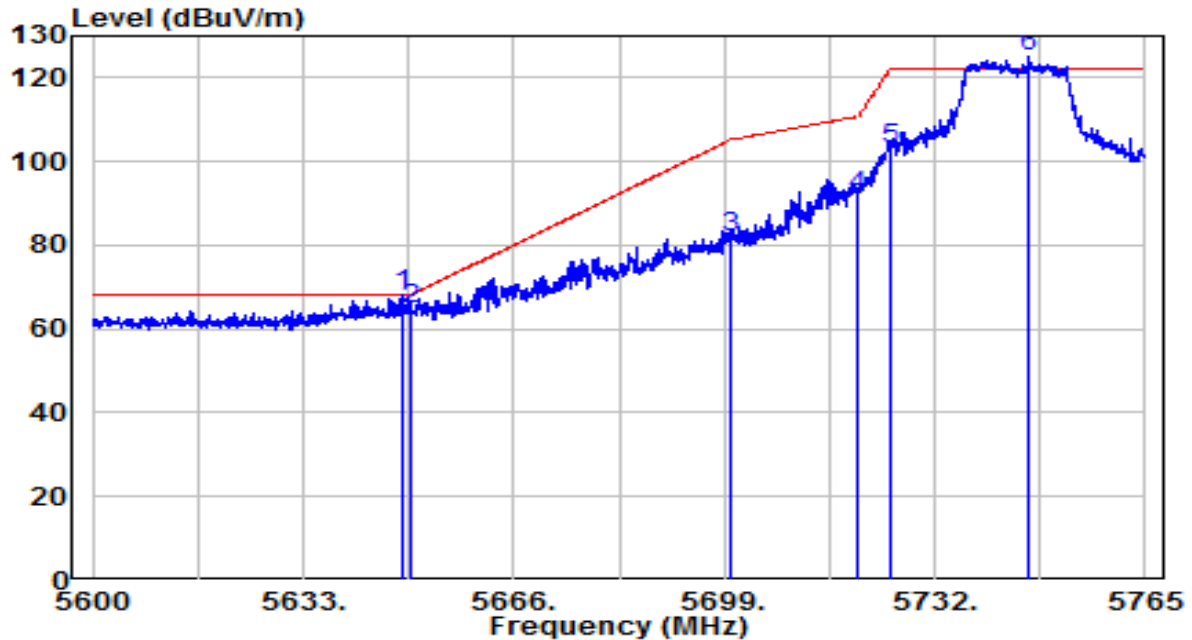


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5648.675	46.72	21.31	68.03	-0.17	68.20	Peak
2	5650.000	43.28	21.32	64.59	-3.61	68.20	Peak
3	5700.000	60.29	21.50	81.79	-23.41	105.20	Peak
4	5720.000	69.95	21.57	91.52	-19.28	110.80	Peak
5	5725.000	81.58	21.59	103.17	-19.03	122.20	Peak
6	* 5746.768	103.23	21.67	124.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

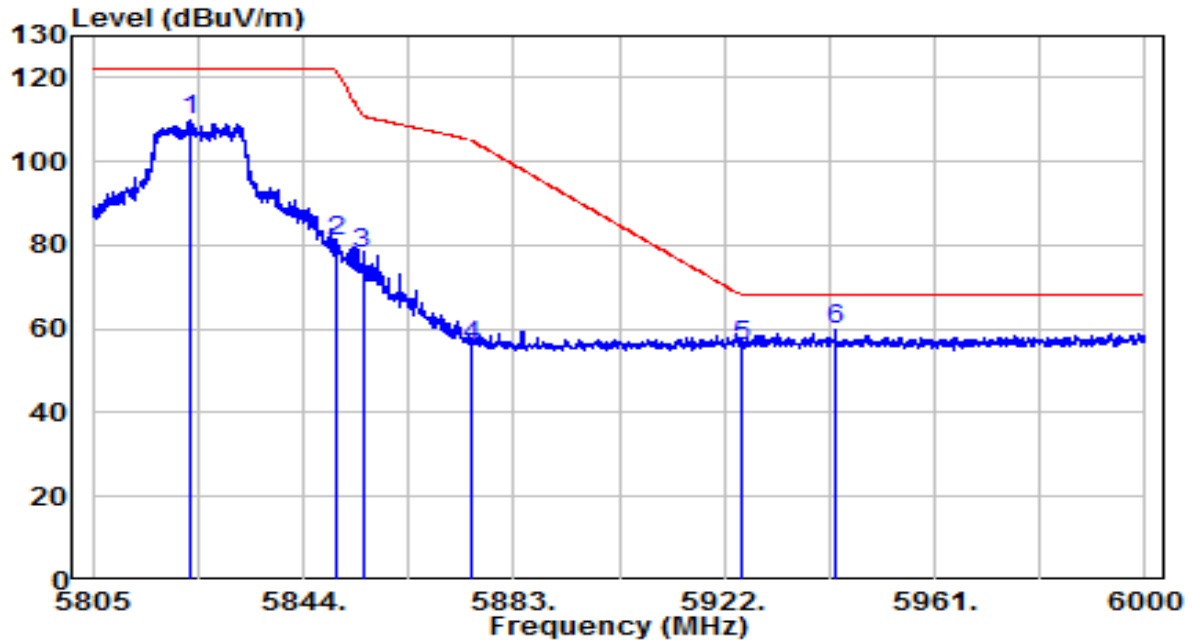


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5822.842	87.73	21.95	109.67	N/A	N/A	Peak
2	5850.000	58.92	22.04	80.96	-41.24	122.20	Peak
3	5855.000	56.05	22.06	78.11	-32.69	110.80	Peak
4	5875.000	34.00	22.14	56.13	-49.07	105.20	Peak
5	5925.000	33.59	22.32	55.91	-12.29	68.20	Peak
6	* 5942.475	37.35	22.38	59.73	-8.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

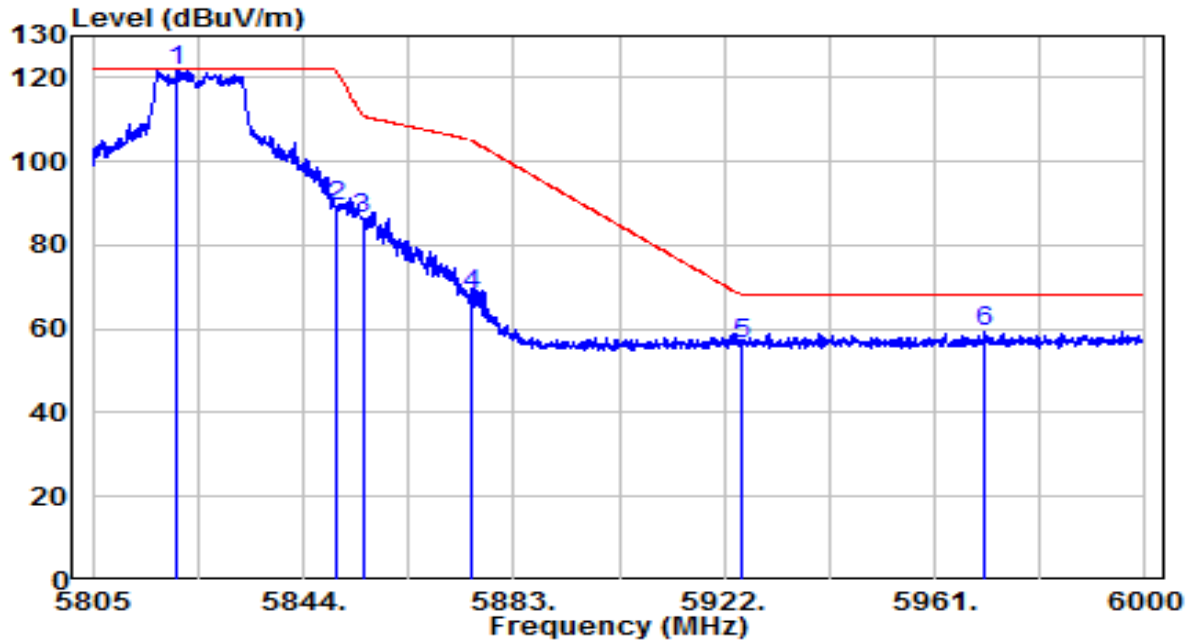


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5820.697	99.83	21.94	121.77	N/A	N/A	Peak
2		5850.045	67.39	22.04	89.44	-32.66	122.10	Peak
3		5855.000	64.47	22.06	86.53	-24.27	110.80	Peak
4		5875.000	45.92	22.14	68.05	-37.15	105.20	Peak
5		5925.000	34.03	22.32	56.35	-11.85	68.20	Peak
6		5970.360	37.12	22.48	59.60	-8.60	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

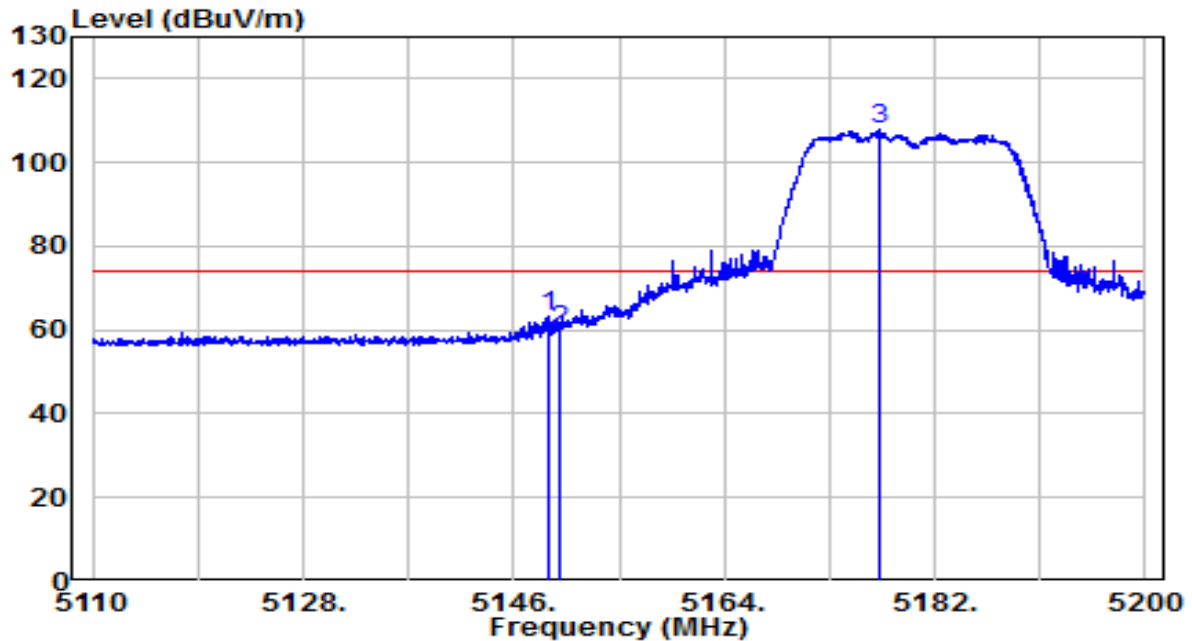


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.105	42.87	20.19	63.06	-10.94	74.00	Peak
2	5150.000	39.84	20.20	60.03	-13.97	74.00	Peak
3	* 5177.365	87.68	20.24	107.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

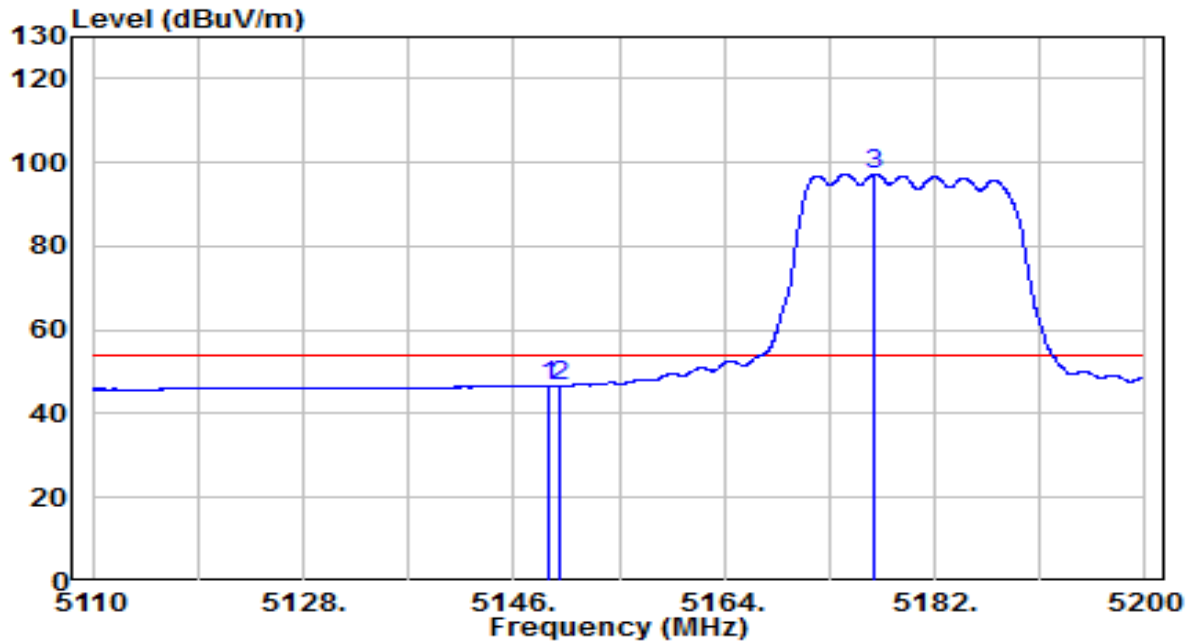


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.970	26.57	20.19	46.76	-7.24	54.00	Average
2	5150.000	26.44	20.20	46.64	-7.36	54.00	Average
3	* 5176.915	77.03	20.24	97.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

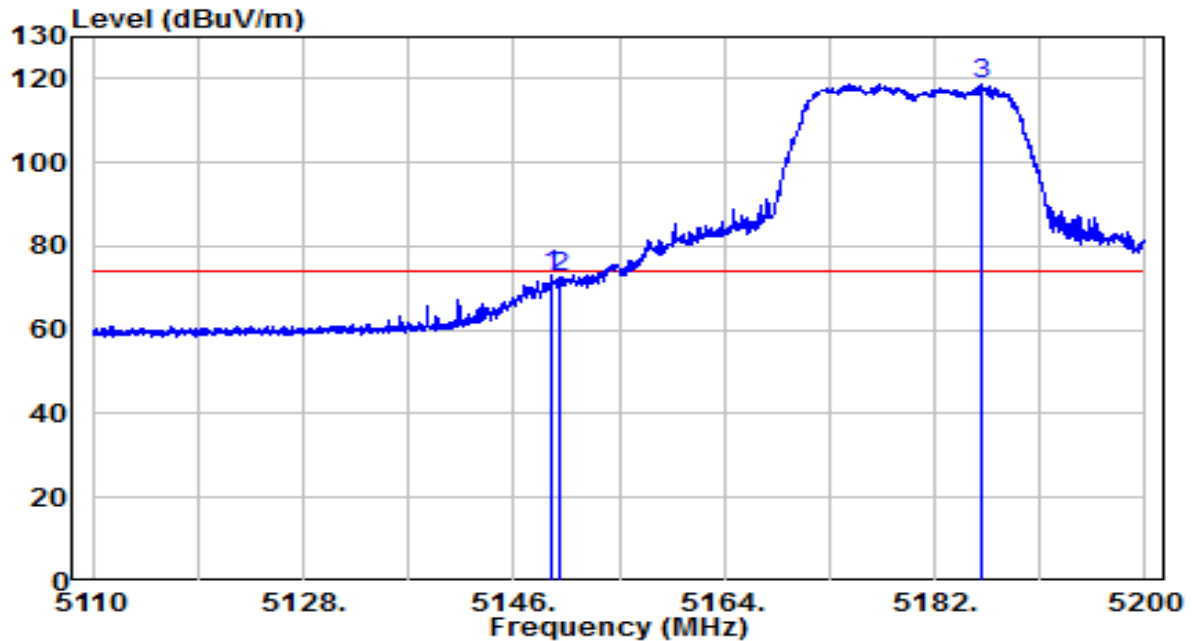


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.240	52.84	20.19	73.04	-0.96	74.00	Peak
2	5150.000	52.30	20.20	72.49	-1.51	74.00	Peak
3	* 5186.050	98.63	20.26	118.88	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

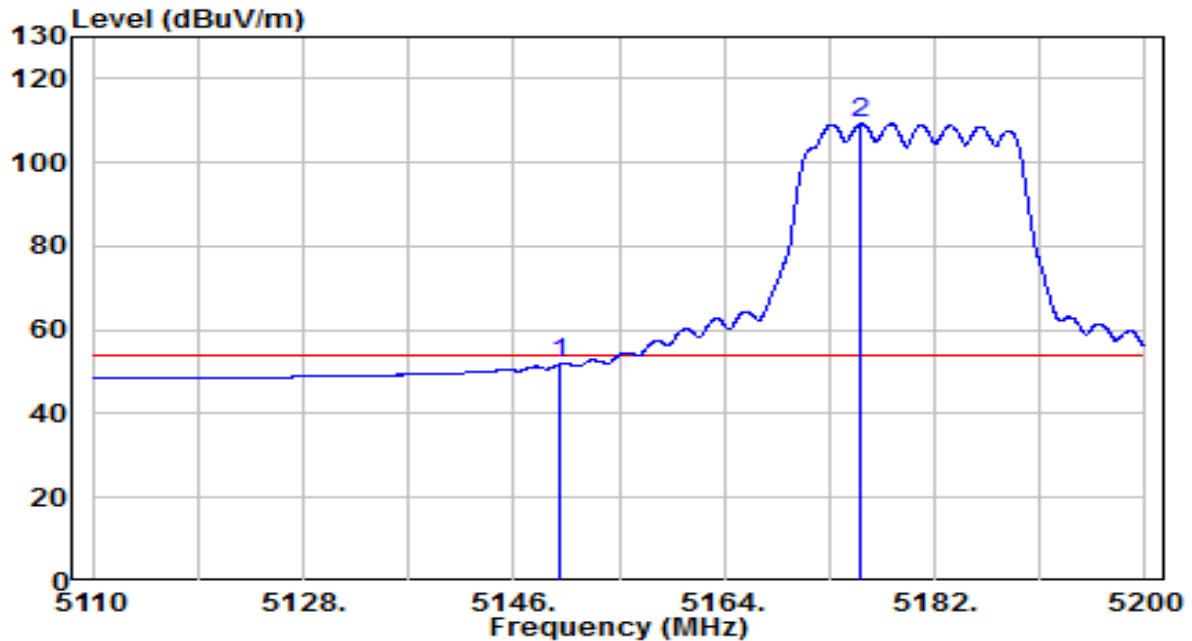


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.005	31.61	20.20	51.81	-2.19	54.00	Average
2	* 5175.745	89.00	20.24	109.24	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

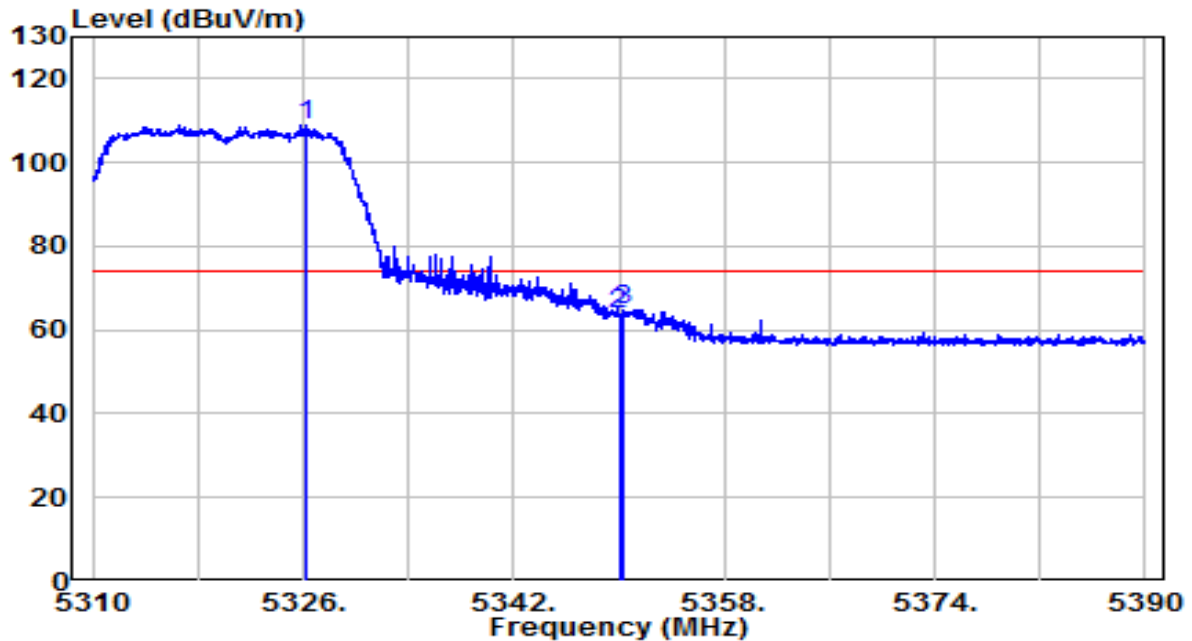


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5326.120	88.50	20.48	108.99	N/A	N/A	Peak
2		5350.000	43.26	20.52	63.78	-10.22	74.00	Peak
3		5350.320	44.35	20.52	64.87	-9.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

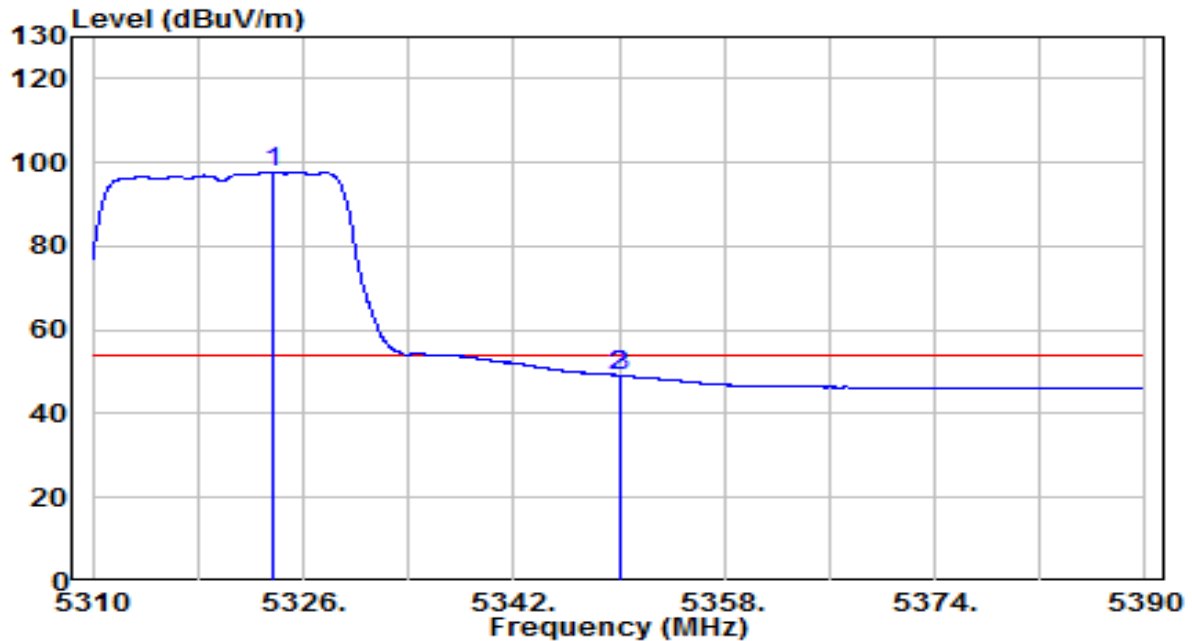


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5323.720	77.15	20.48	97.63	N/A	N/A	Average
2		5350.000	28.69	20.52	49.22	-4.78	54.00	Average
3		5350.080	28.73	20.52	49.25	-4.75	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

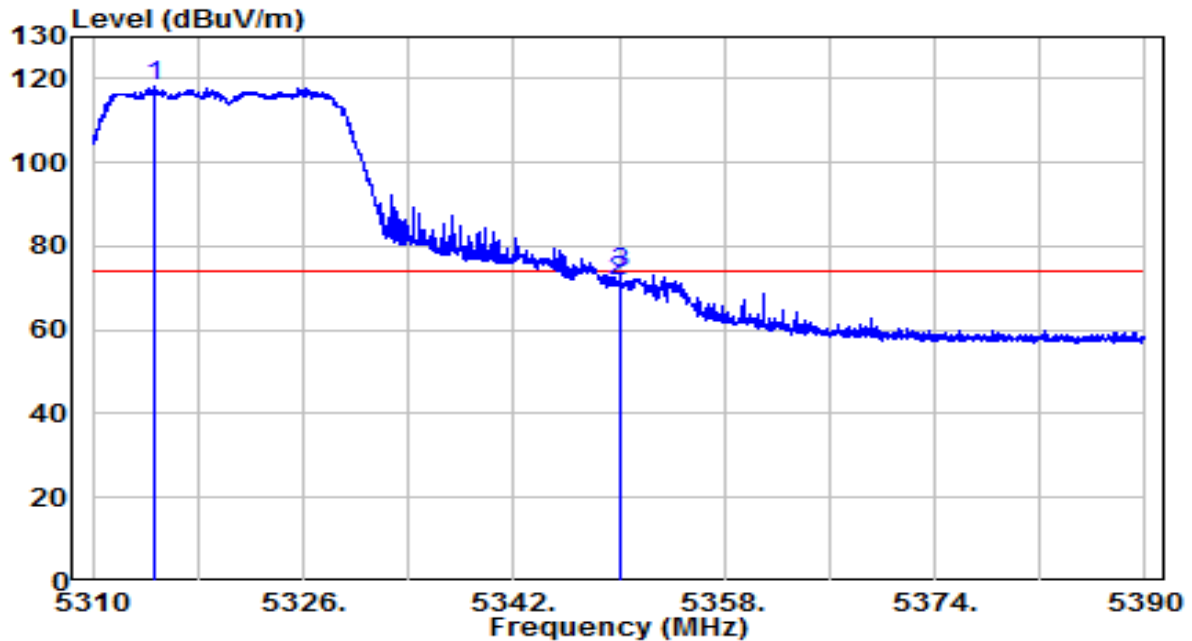


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5314.640	97.64	20.47	118.11	N/A	N/A	Peak
2		5350.000	51.23	20.52	71.75	-2.25	74.00	Peak
3		5350.160	52.82	20.52	73.34	-0.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

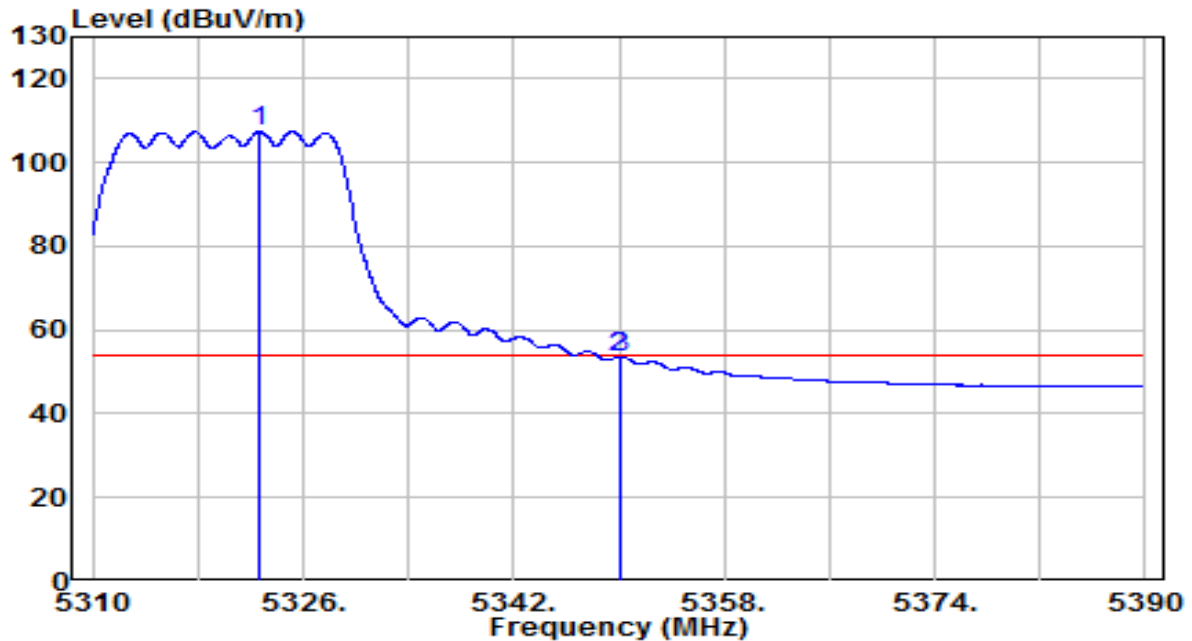


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.720	86.88	20.48	107.36	N/A	N/A	Average
2		5350.000	33.13	20.52	53.66	-0.34	54.00	Average
3		5350.200	33.18	20.52	53.70	-0.30	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

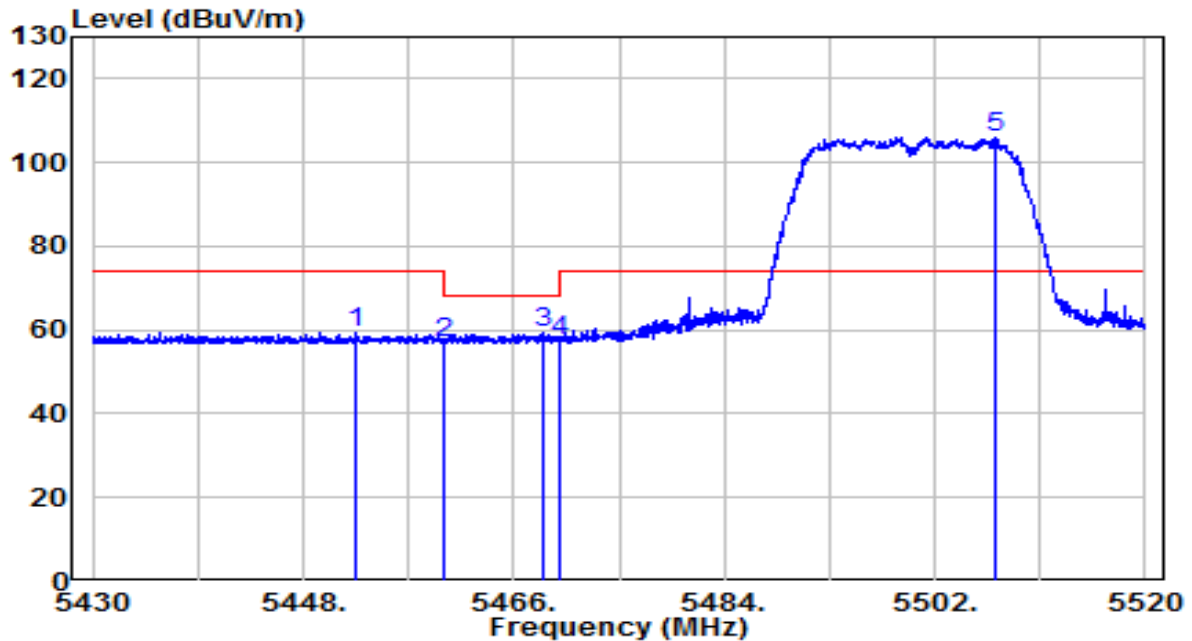


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.590	38.65	20.69	59.34	-14.66	74.00	Peak
2	5460.015	36.39	20.70	57.10	-11.10	68.20	Peak
3	5468.610	38.59	20.72	59.31	-8.89	68.20	Peak
4	5470.000	36.65	20.72	57.37	-10.83	68.20	Peak
5	* 5507.130	85.28	20.80	106.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

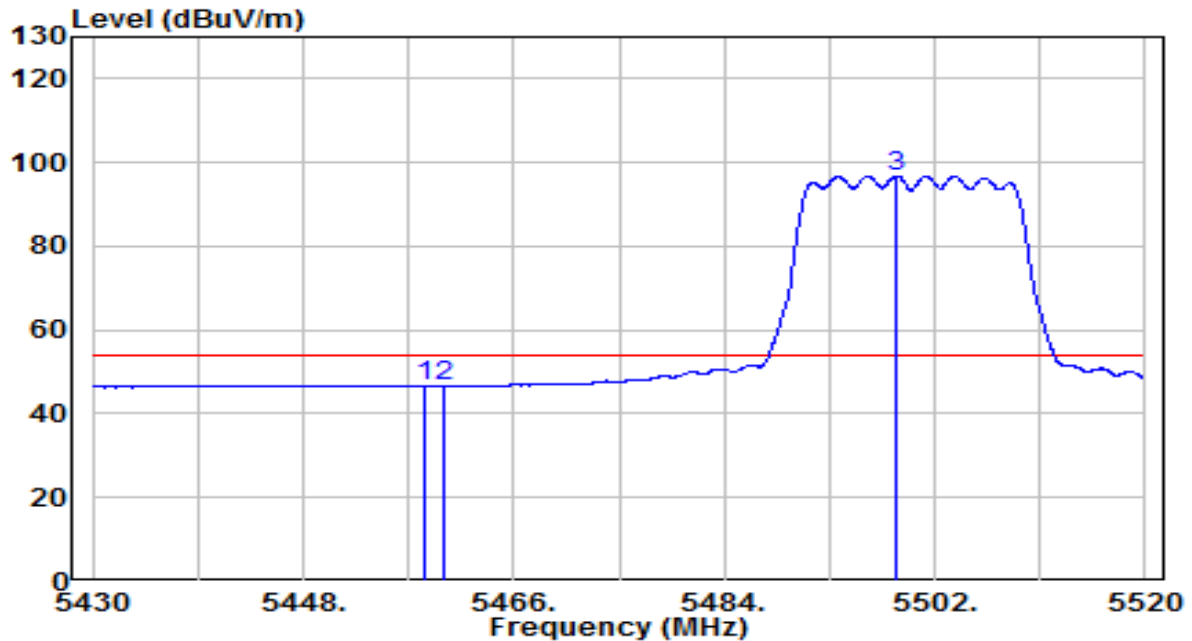


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.350	25.96	20.70	46.66	-7.34	54.00	Average
2	5460.015	25.92	20.70	46.62	-7.38	54.00	Average
3	* 5498.715	76.00	20.77	96.77	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

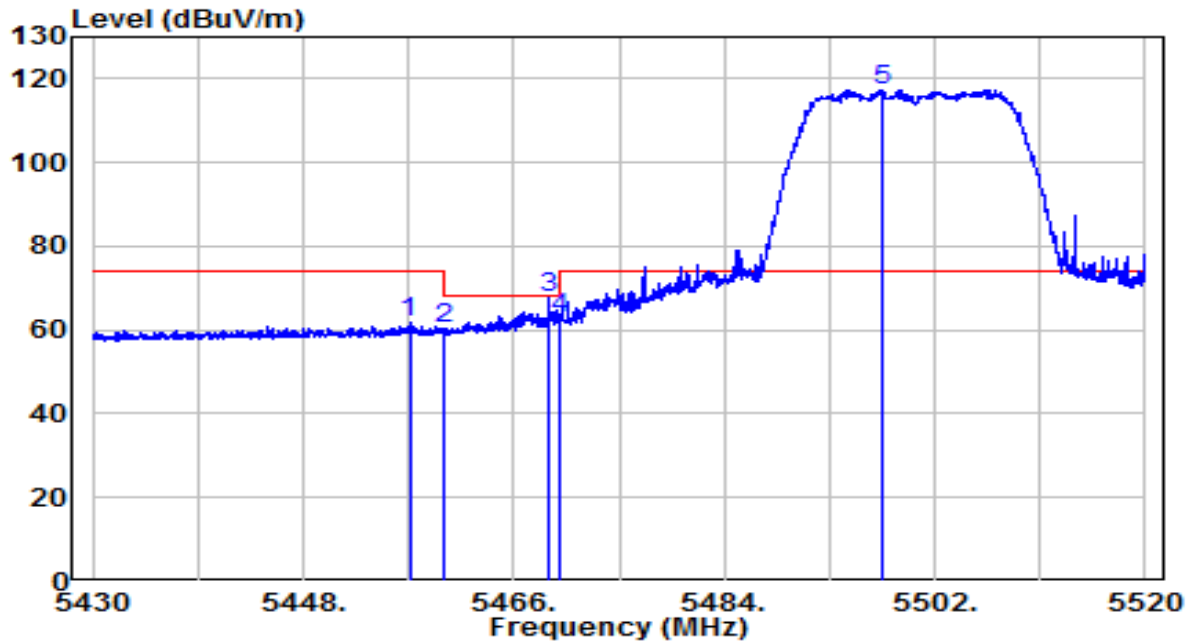


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.090	40.97	20.70	61.67	-12.33	74.00	Peak
2	5460.000	39.75	20.70	60.45	-7.75	68.20	Peak
3	5469.060	46.96	20.72	67.68	-0.52	68.20	Peak
4	5470.000	41.85	20.72	62.57	-5.63	68.20	Peak
5	* 5497.410	96.70	20.77	117.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

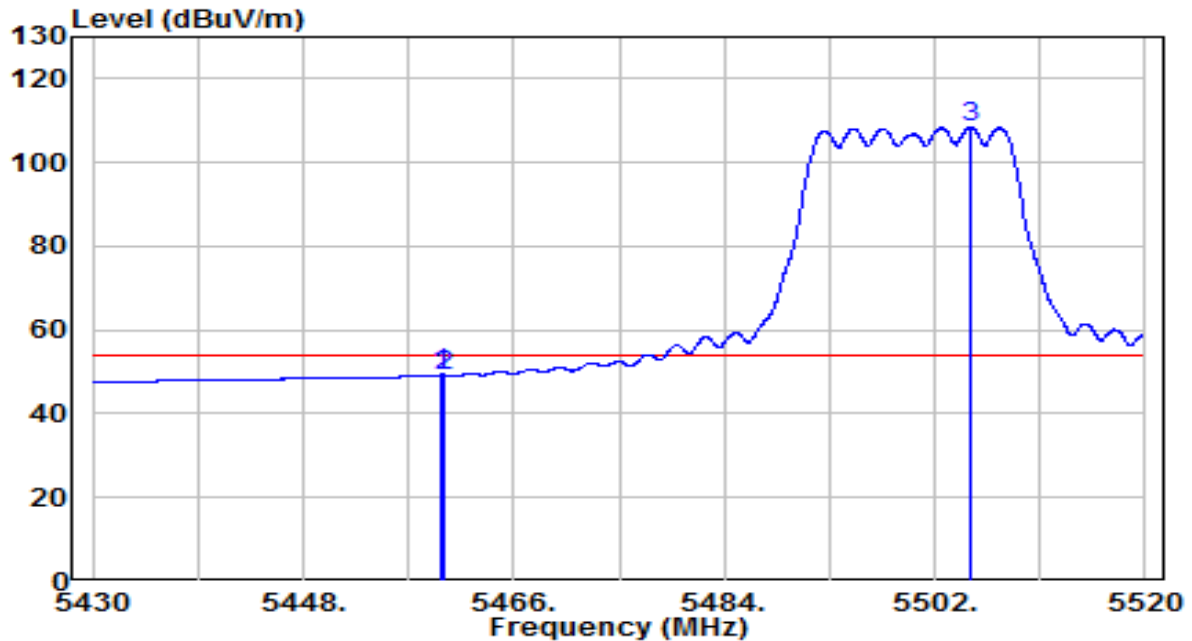


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.880	28.61	20.70	49.31	-4.69	54.00	Average
2	5460.000	28.55	20.70	49.25	-4.75	54.00	Average
3	* 5505.015	87.68	20.79	108.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120V/60Hz

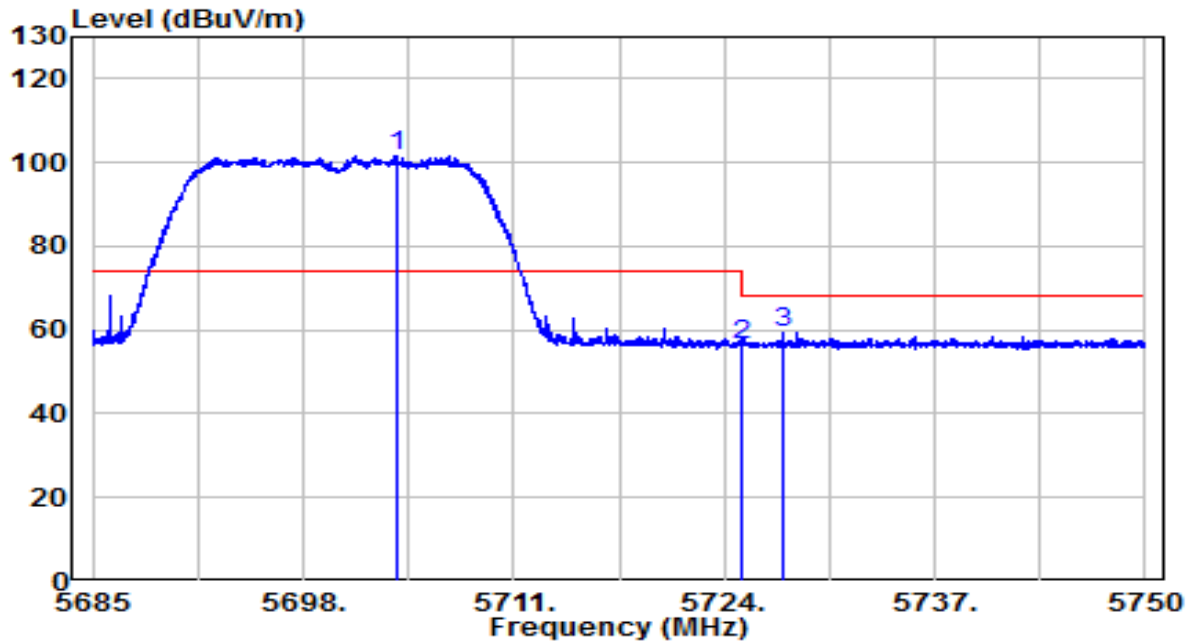


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5703.817	80.08	21.51	101.60	N/A	N/A	Peak
2		5725.000	34.95	21.59	56.54	-11.66	68.20	Peak
3		5727.672	37.62	21.60	59.22	-8.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120V/60Hz

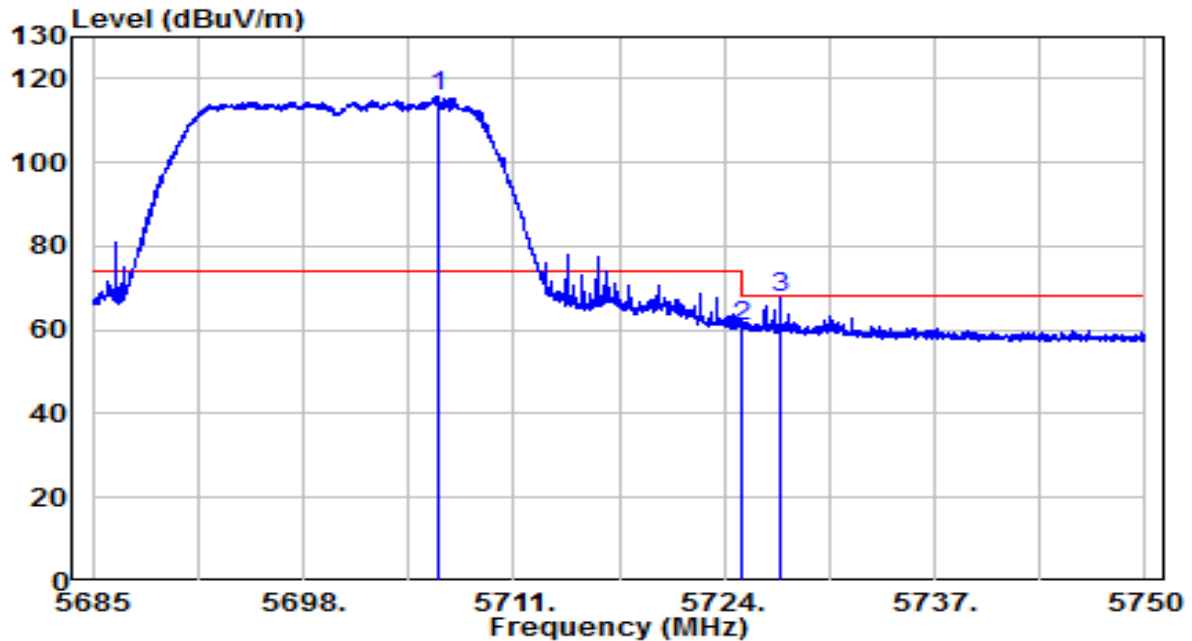


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.288	94.40	21.52	115.93	N/A	N/A	Peak
2		5725.000	39.15	21.59	60.74	-7.46	68.20	Peak
3		5727.478	46.12	21.60	67.72	-0.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

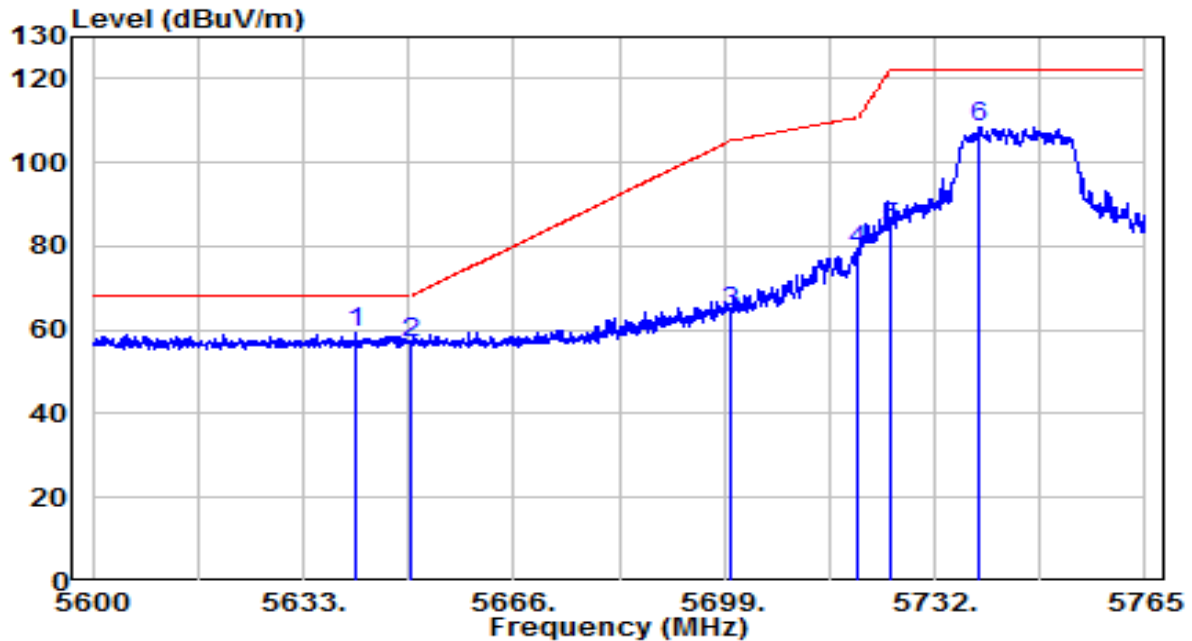


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5641.333	38.17	21.28	59.46	-8.74	68.20	Peak
2		5649.995	35.61	21.32	56.92	-11.28	68.20	Peak
3		5700.000	42.98	21.50	64.47	-40.73	105.20	Peak
4		5720.000	57.28	21.57	78.85	-31.95	110.80	Peak
5		5725.000	63.01	21.59	84.60	-37.60	122.20	Peak
6		5738.848	86.95	21.64	108.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

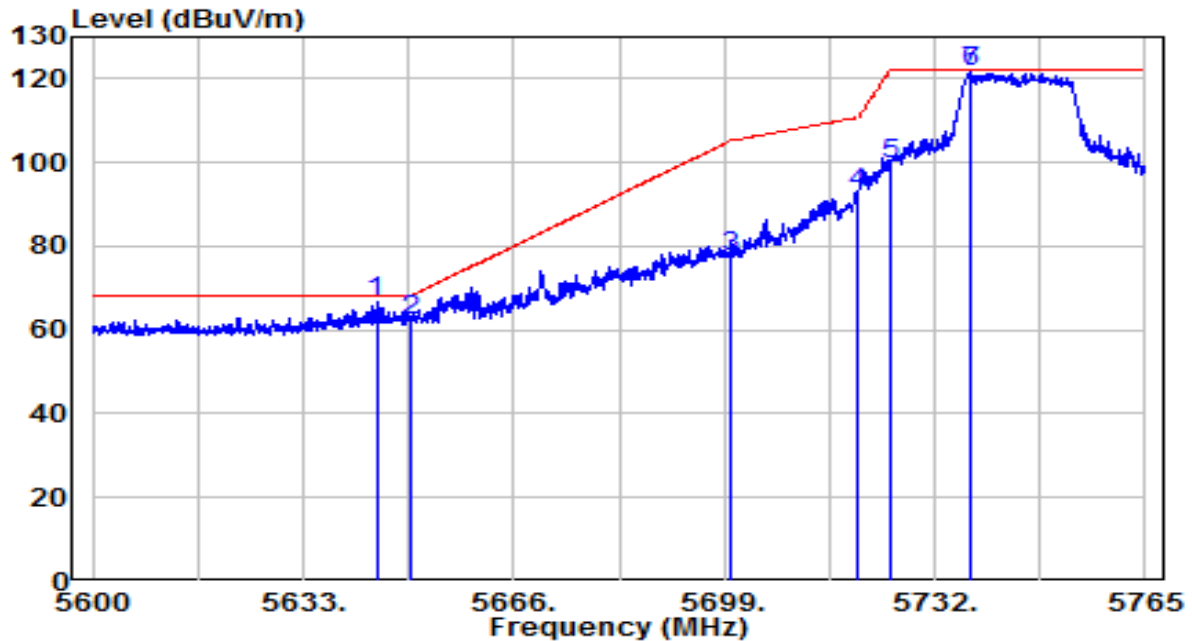


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5644.467	45.52	21.30	66.81	-1.39	68.20	Peak
2	5649.995	41.05	21.32	62.36	-5.84	68.20	Peak
3	5700.000	56.24	21.50	77.73	-27.47	105.20	Peak
4	5720.000	71.03	21.57	92.61	-18.20	110.80	Peak
5	5725.000	77.91	21.59	99.50	-22.70	122.20	Peak
6	* 5737.692	99.78	21.64	121.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

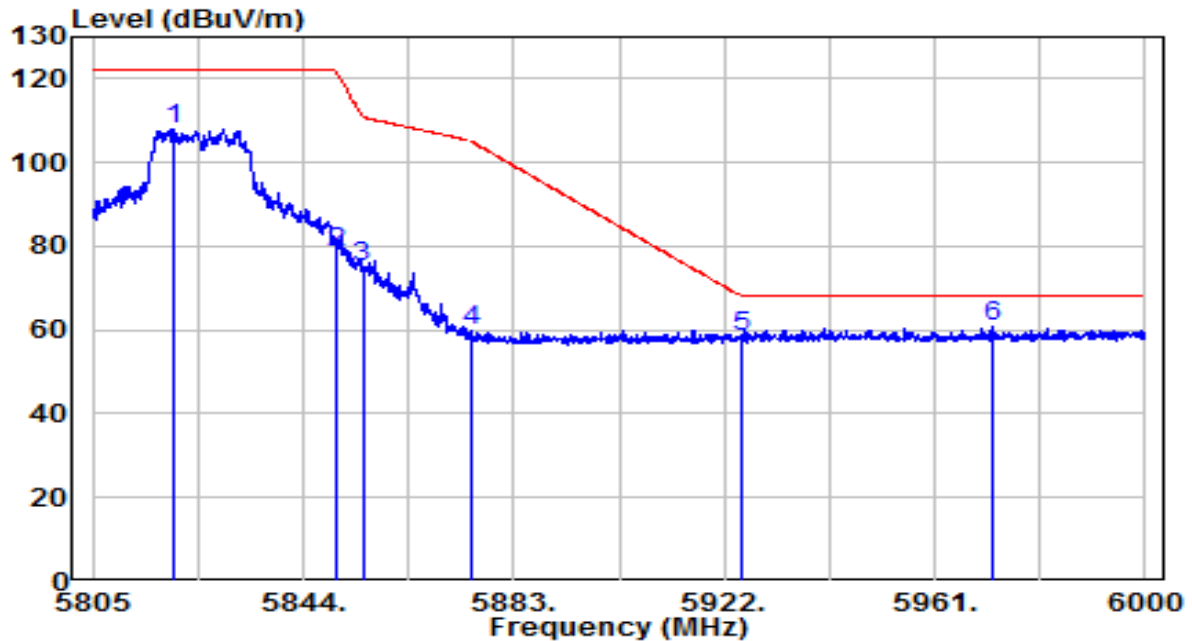


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5819.917	85.94	21.93	107.88	N/A	N/A	Peak
2	5850.045	56.63	22.04	78.67	-43.43	122.10	Peak
3	5855.000	52.99	22.06	75.05	-35.75	110.80	Peak
4	5875.000	37.63	22.14	59.76	-45.44	105.20	Peak
5	5925.000	35.93	22.32	58.25	-9.95	68.20	Peak
6	* 5971.530	38.13	22.49	60.62	-7.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

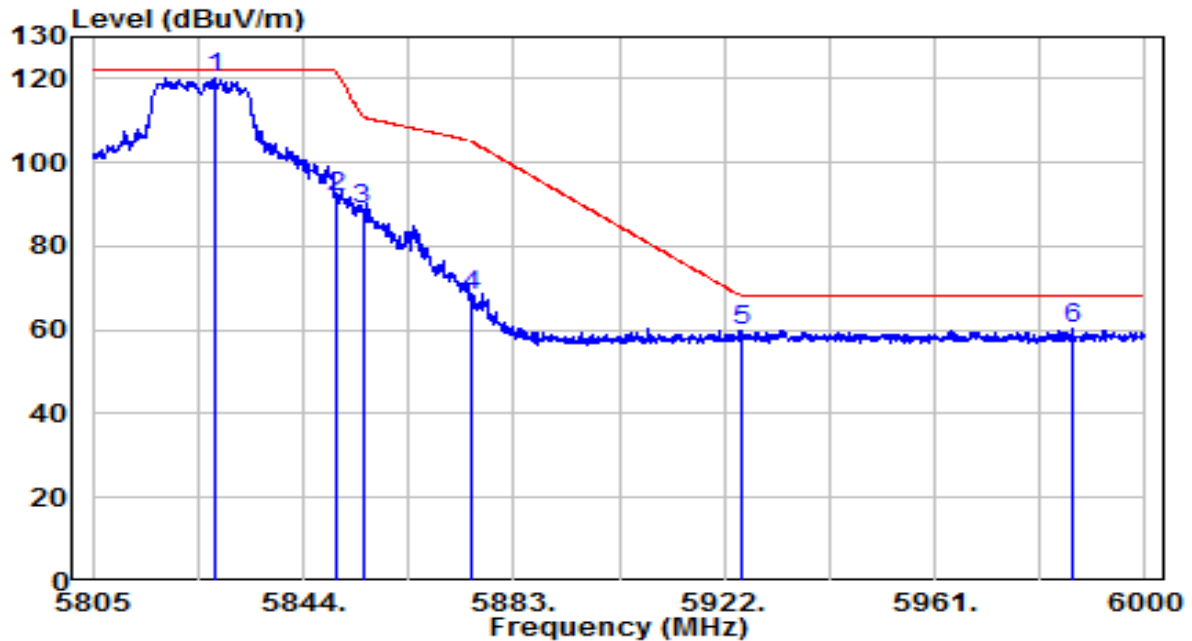


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5827.522	98.17	21.96	120.13	N/A	N/A	Peak
2		5850.045	69.66	22.04	91.70	-30.40	122.10	Peak
3		5855.000	66.89	22.06	88.95	-21.85	110.80	Peak
4		5875.000	46.29	22.14	68.42	-36.78	105.20	Peak
5		5925.000	37.41	22.32	59.72	-8.48	68.20	Peak
6		5986.643	37.57	22.54	60.11	-8.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

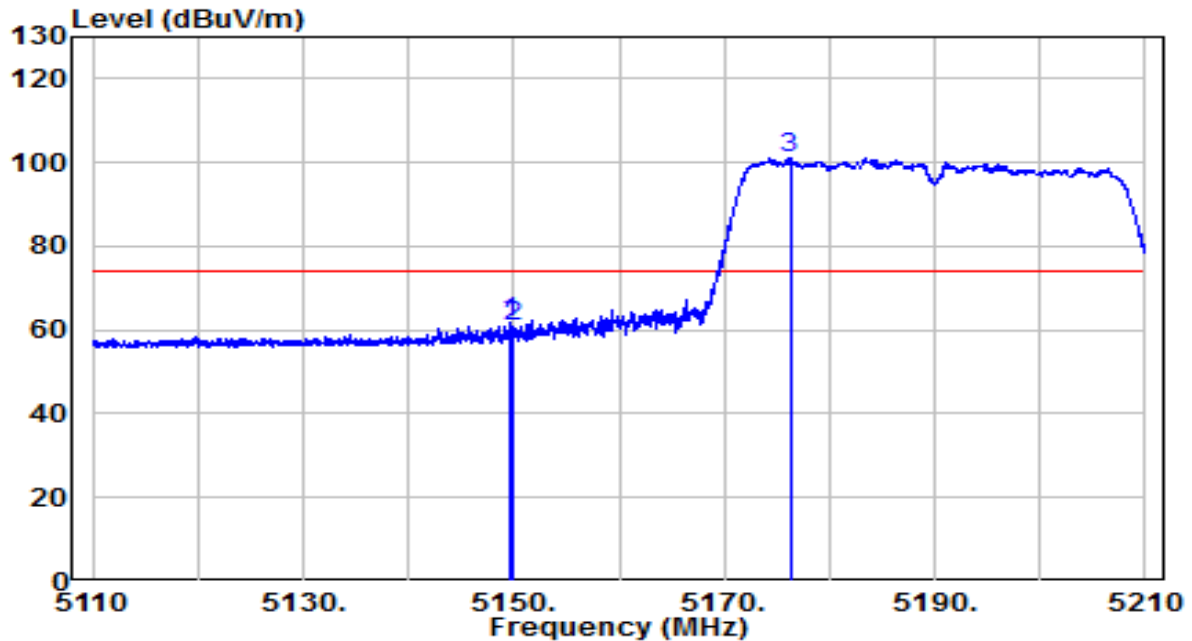


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.700	41.76	20.20	61.95	-12.05	74.00	Peak
2	5150.000	40.58	20.20	60.77	-13.23	74.00	Peak
3	* 5176.250	80.98	20.24	101.22	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

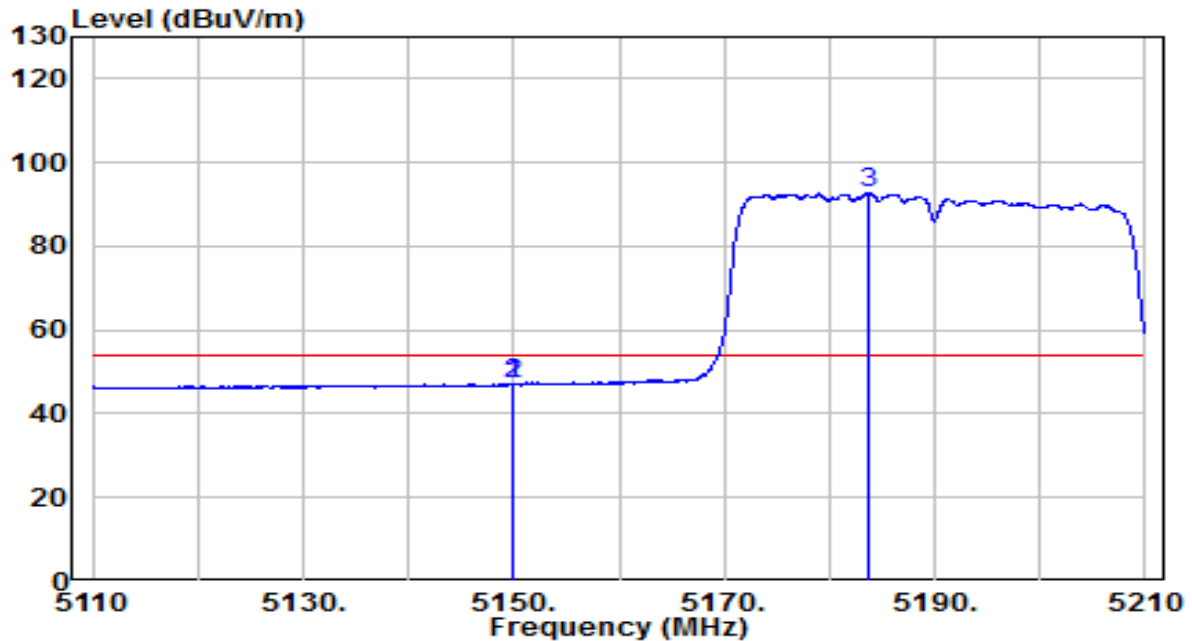


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.800	26.92	20.20	47.11	-6.89	54.00	Average
2	5150.000	26.78	20.20	46.98	-7.02	54.00	Average
3	* 5183.700	72.42	20.25	92.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

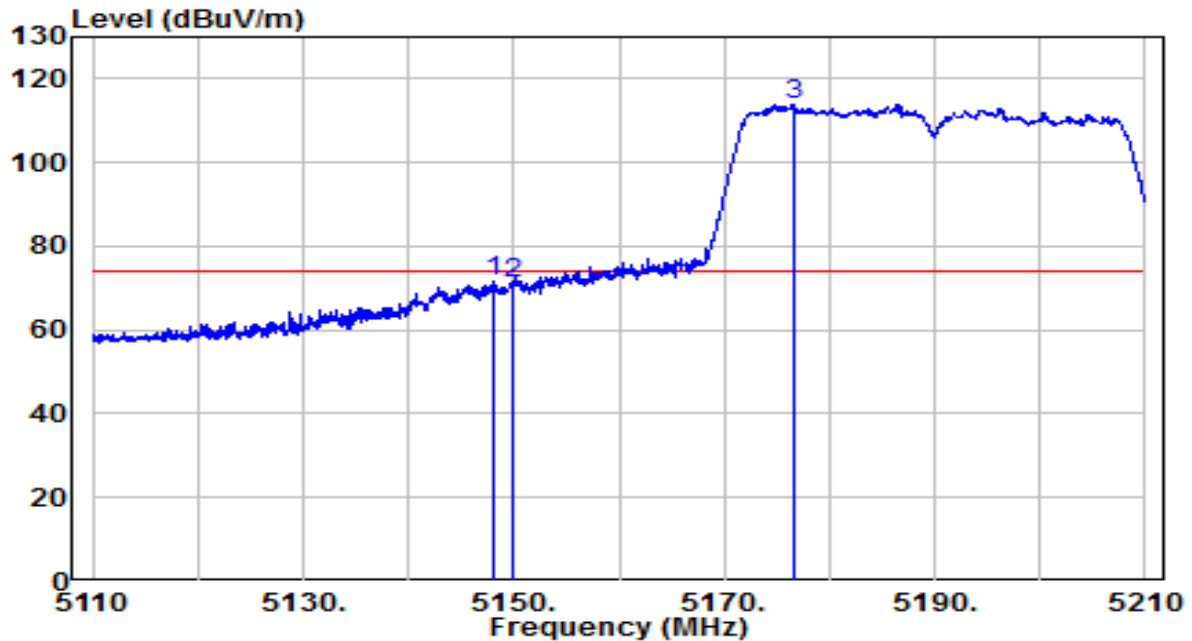


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.050	51.25	20.19	71.45	-2.55	74.00	Peak
2	5150.000	51.10	20.20	71.29	-2.71	74.00	Peak
3	* 5176.600	93.65	20.24	113.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

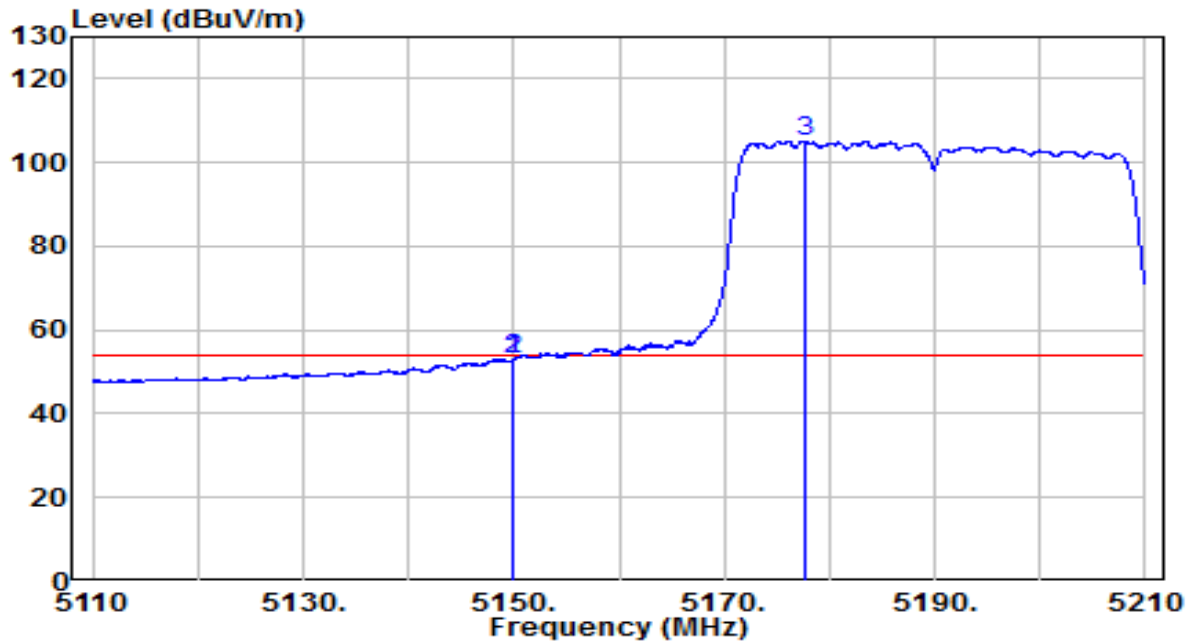


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.950	32.82	20.20	53.02	-0.98	54.00	Average
2	5150.000	32.81	20.20	53.00	-1.00	54.00	Average
3	* 5177.600	84.97	20.24	105.21	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

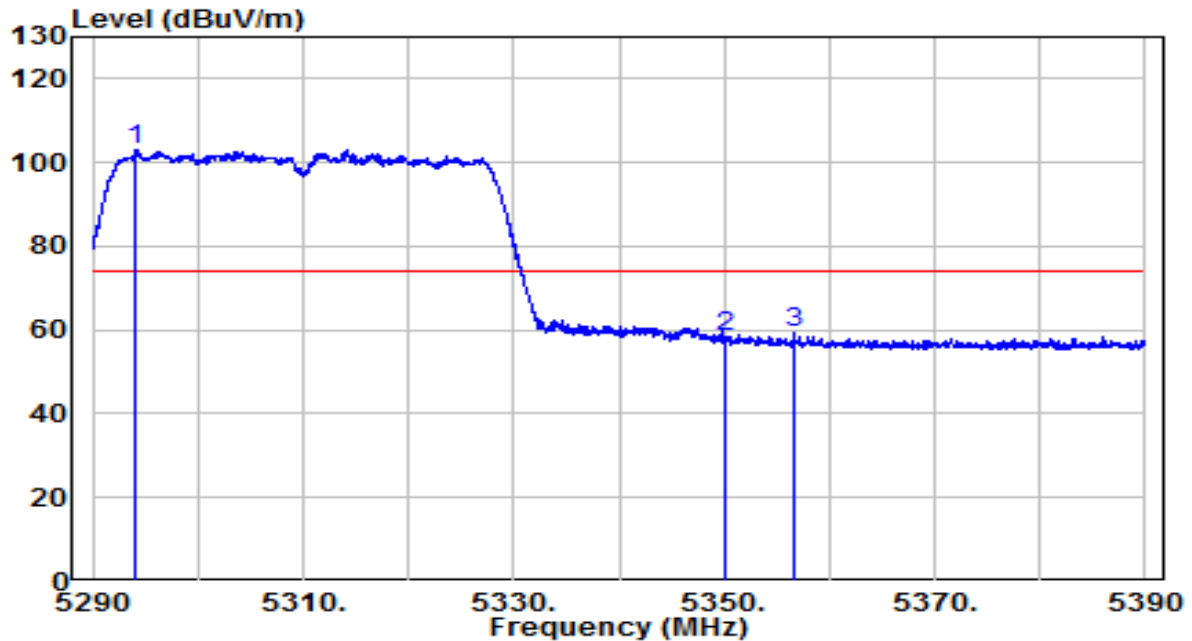


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5294.150	82.60	20.43	103.03	N/A	N/A	Peak
2		5350.000	37.82	20.52	58.34	-15.66	74.00	Peak
3		5356.650	38.92	20.53	59.45	-14.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

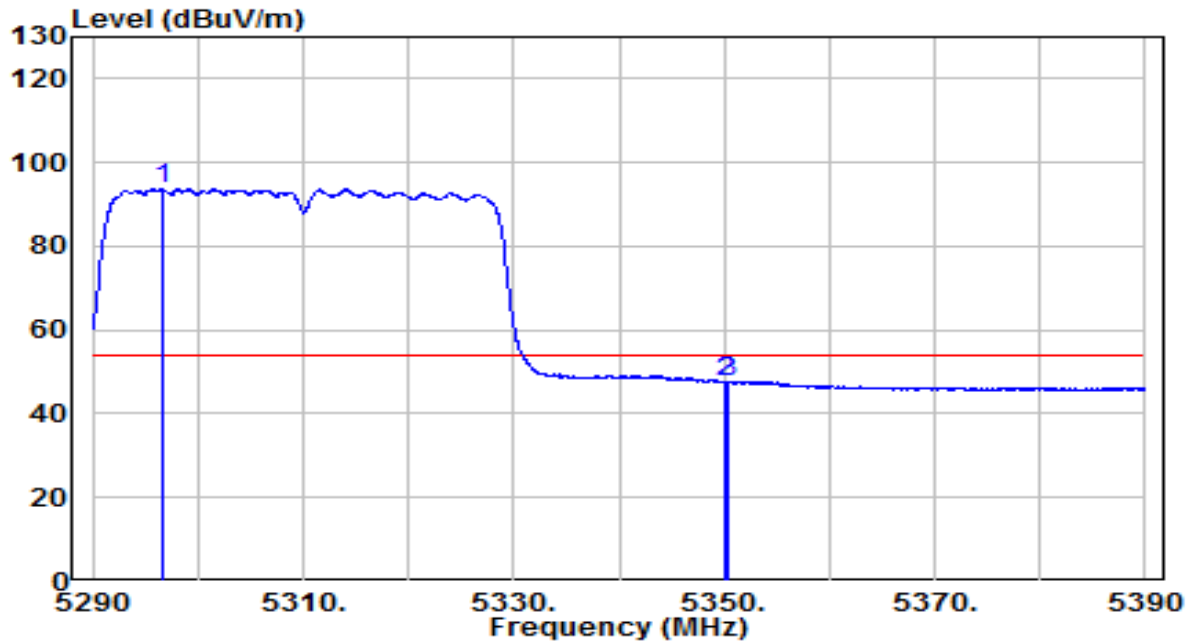


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.550	73.20	20.44	93.64	N/A	N/A	Average
2		5350.000	27.08	20.52	47.60	-6.40	54.00	Average
3		5350.350	27.14	20.52	47.66	-6.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

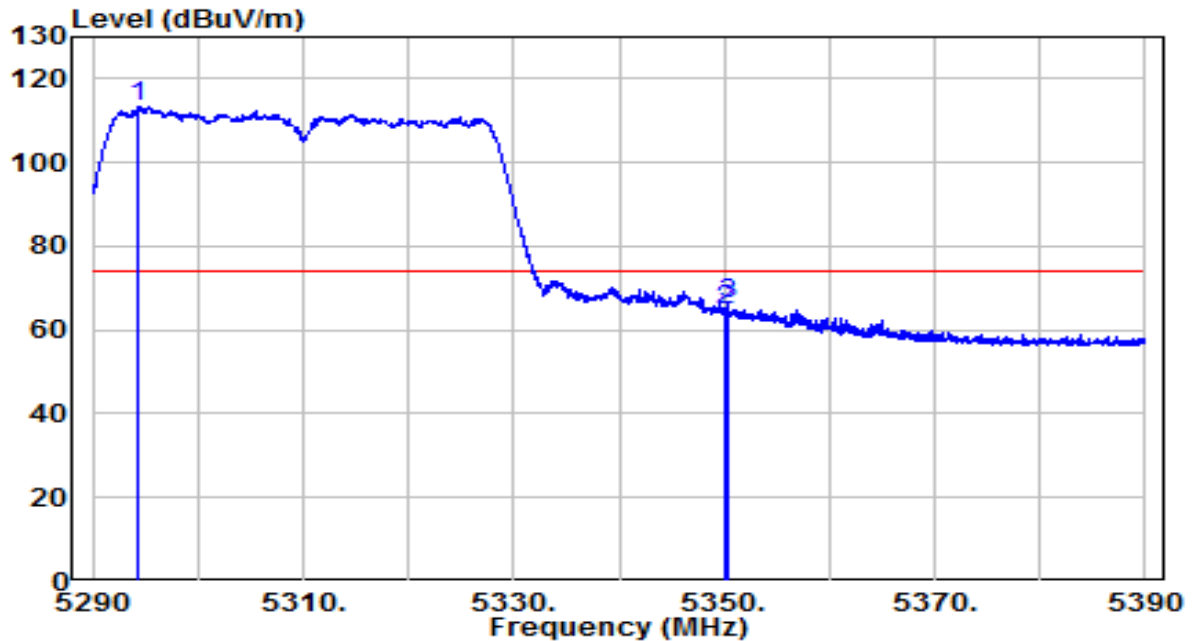


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5294.400	93.02	20.43	113.45	N/A	N/A	Peak
2		5350.000	44.16	20.52	64.68	-9.32	74.00	Peak
3		5350.300	45.67	20.52	66.20	-7.80	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

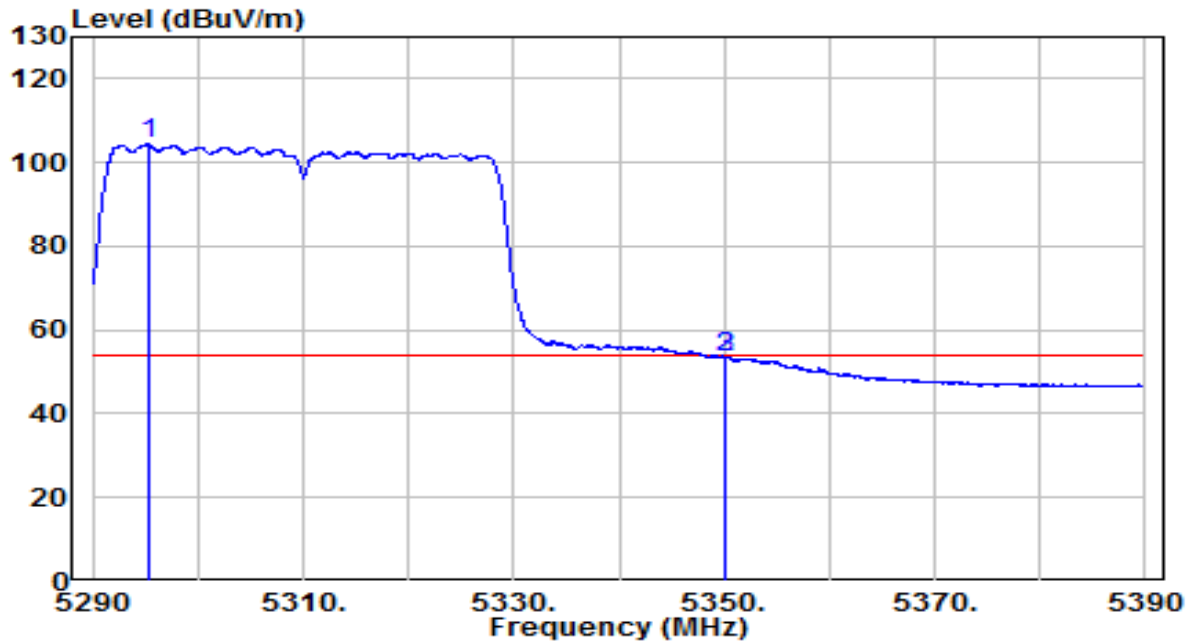


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5295.300	83.95	20.43	104.38	N/A	N/A	Average
2		5350.000	33.07	20.52	53.59	-0.41	54.00	Average
3		5350.050	33.10	20.52	53.62	-0.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

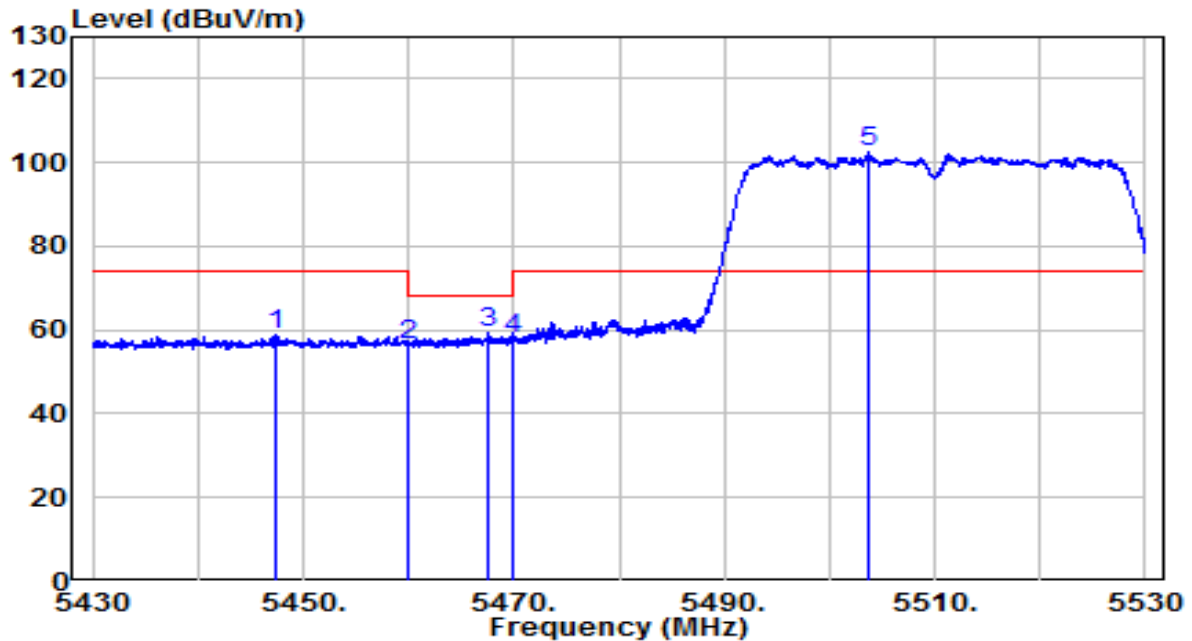


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5447.500	38.07	20.68	58.75	-15.25	74.00	Peak
2	5460.000	35.77	20.70	56.47	-11.73	68.20	Peak
3	5467.650	38.56	20.72	59.28	-8.92	68.20	Peak
4	5470.000	37.04	20.72	57.76	-10.44	68.20	Peak
5	* 5503.650	81.59	20.78	102.37	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

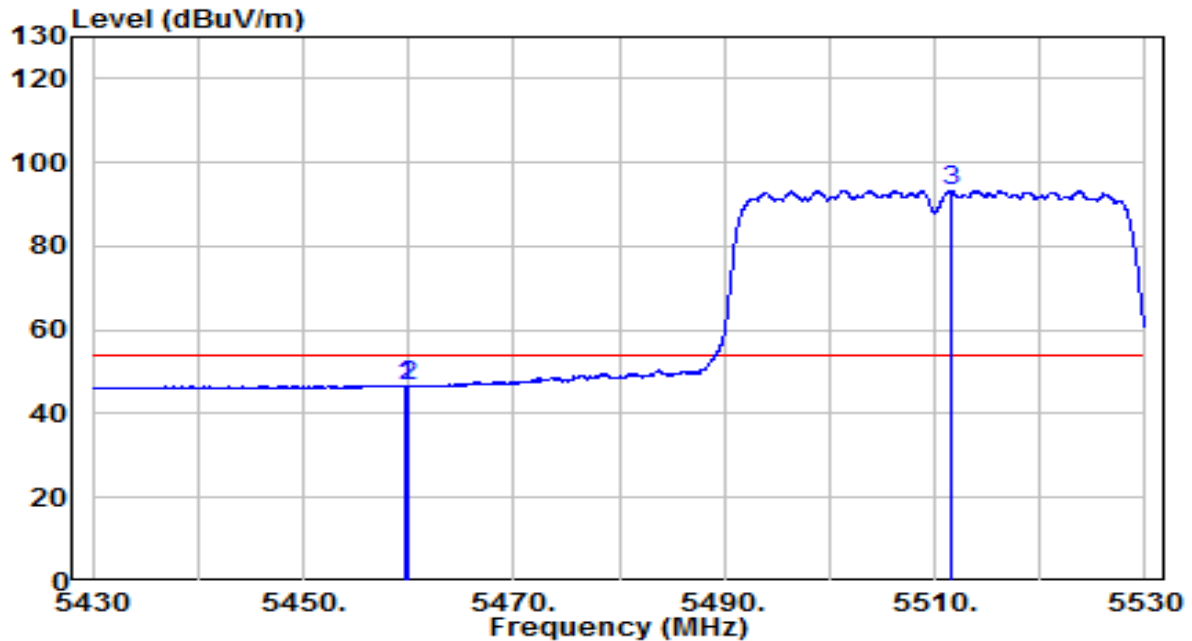


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.800	26.05	20.70	46.75	-7.25	54.00	Average
2	5460.000	25.86	20.70	46.56	-7.44	54.00	Average
3	* 5511.500	72.45	20.81	93.26	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

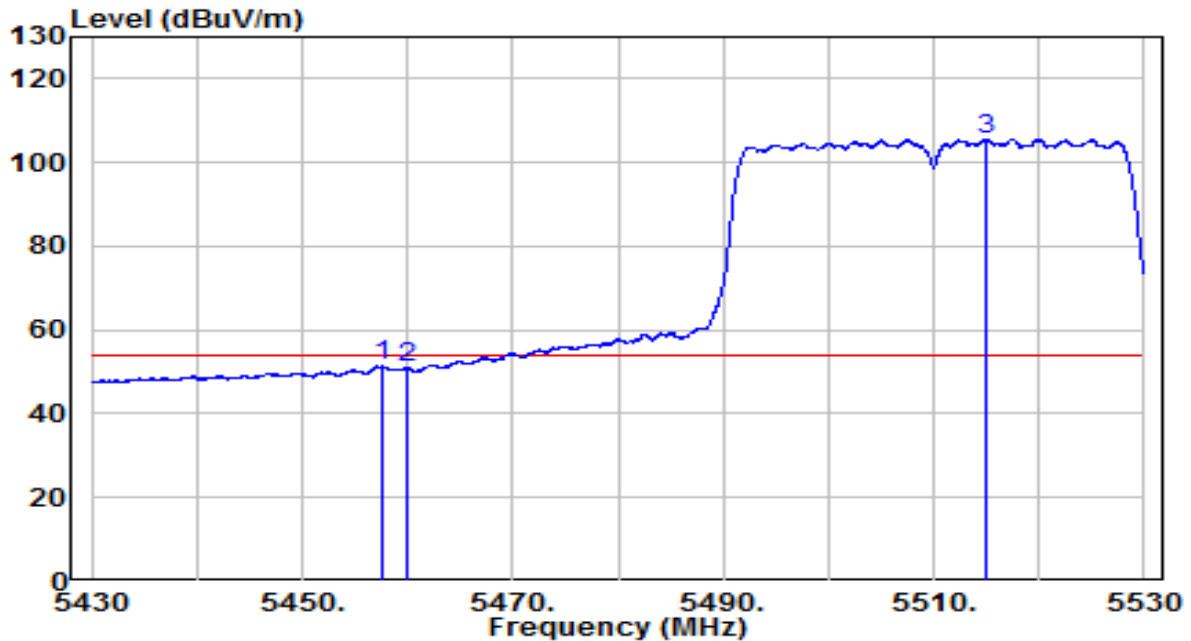


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.550	30.75	20.70	51.45	-2.55	54.00	Average
2	5460.000	30.30	20.70	51.00	-3.00	54.00	Average
3	* 5514.950	84.75	20.82	105.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

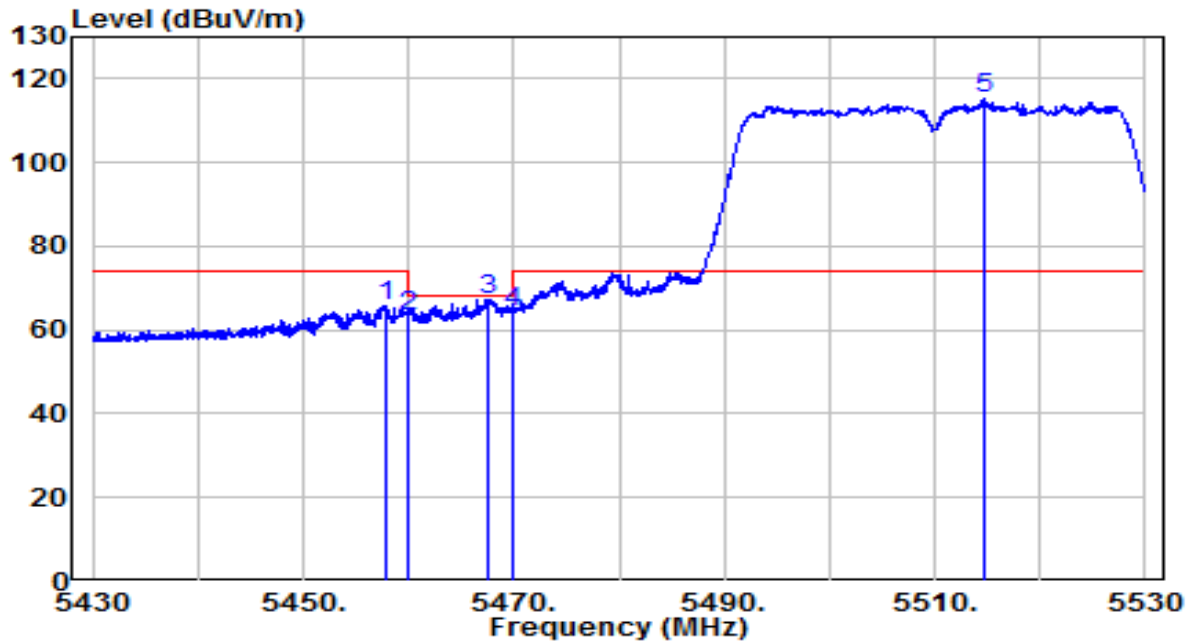


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.750	44.99	20.70	65.69	-8.31	74.00	Peak
2	5460.000	42.81	20.70	63.51	-4.69	68.20	Peak
3	5467.650	46.69	20.72	67.40	-0.80	68.20	Peak
4	5470.000	43.77	20.72	64.49	-3.71	68.20	Peak
5	* 5514.650	94.25	20.82	115.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

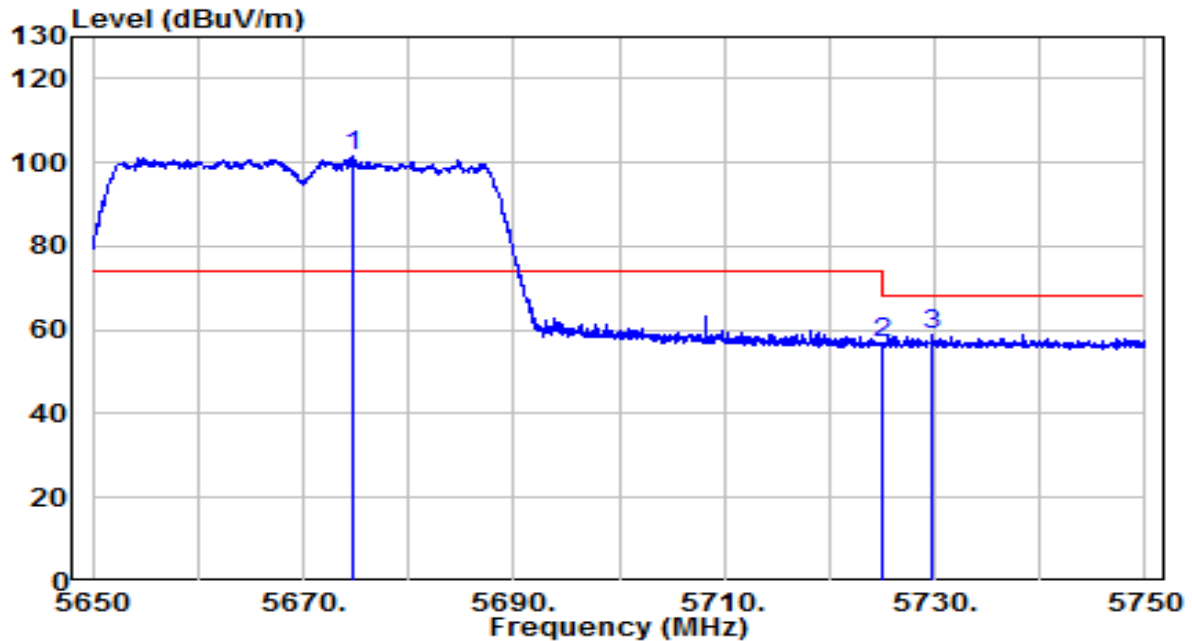


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5674.700	80.05	21.41	101.46	N/A	N/A	Peak
2		5725.000	35.15	21.59	56.74	-11.46	68.20	Peak
3		5729.850	37.16	21.61	58.76	-9.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

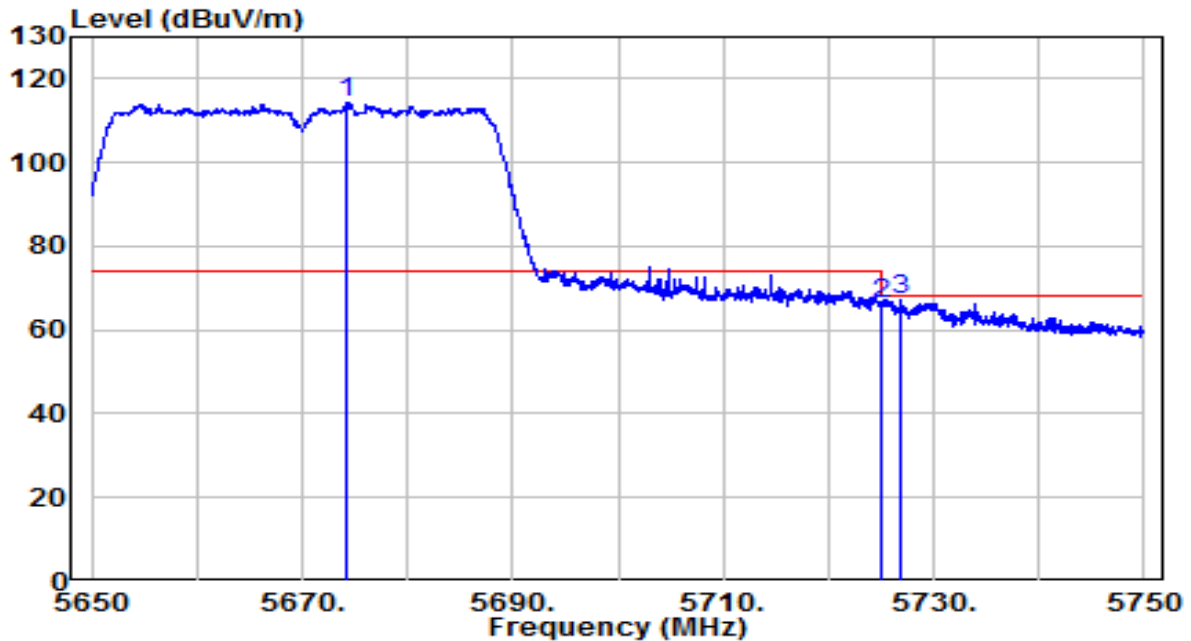


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5674.300	92.75	21.40	114.15	N/A	N/A	Peak
2		5725.000	44.67	21.59	66.26	-1.94	68.20	Peak
3		5726.900	45.57	21.60	67.17	-1.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

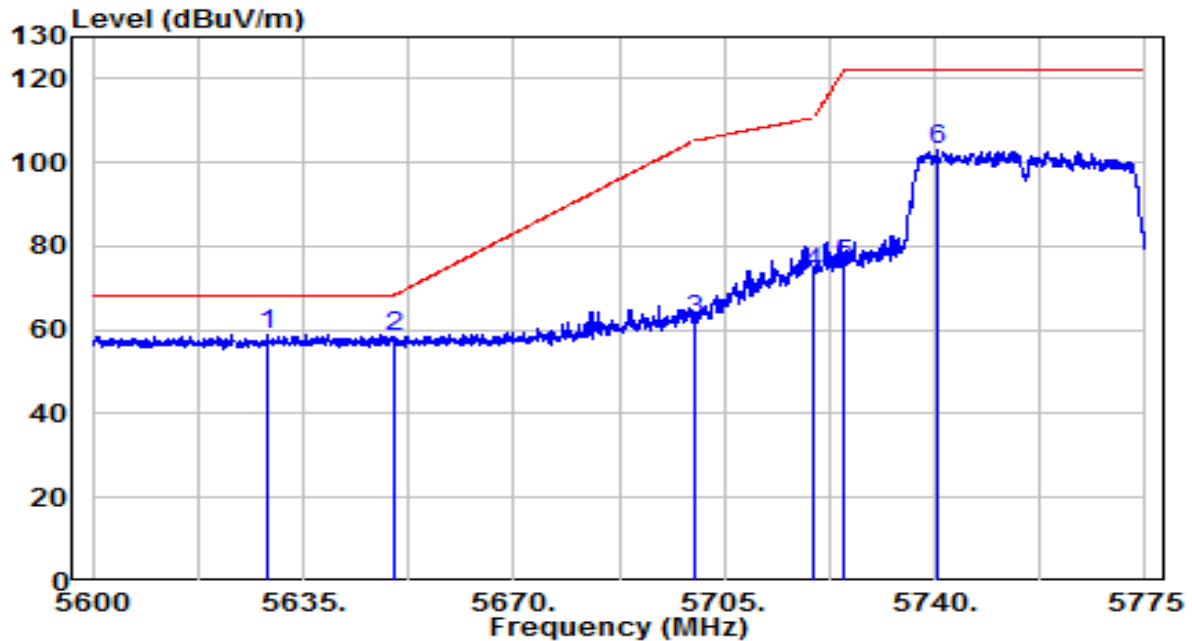


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5628.962	37.76	21.24	59.00	-9.20	68.20	Peak
2		5649.962	37.01	21.32	58.33	-9.87	68.20	Peak
3		5700.000	40.67	21.50	62.17	-43.03	105.20	Peak
4		5720.000	52.03	21.57	73.60	-37.20	110.80	Peak
5		5725.000	53.87	21.59	75.46	-46.74	122.20	Peak
6		5740.263	81.18	21.64	102.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

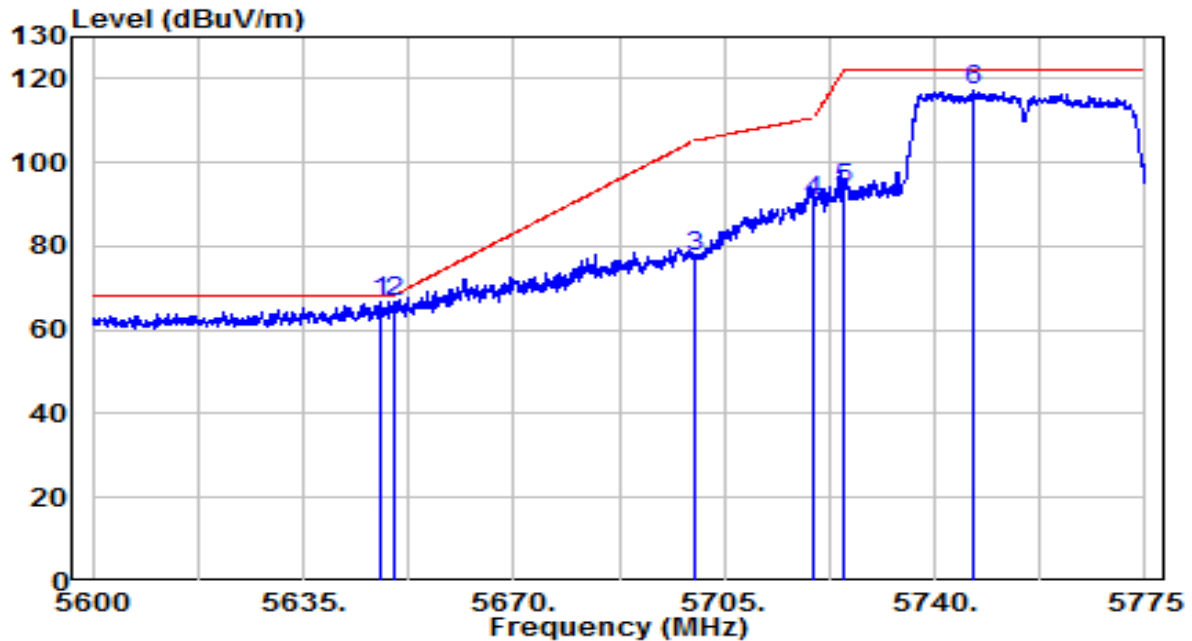


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.688	45.56	21.31	66.87	-1.33	68.20	Peak
2		5649.962	45.50	21.32	66.82	-1.38	68.20	Peak
3		5700.000	55.81	21.50	77.31	-27.89	105.20	Peak
4		5720.000	69.35	21.57	90.92	-19.88	110.80	Peak
5		5725.000	72.30	21.59	93.89	-28.31	122.20	Peak
6		5746.563	95.39	21.67	117.06	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

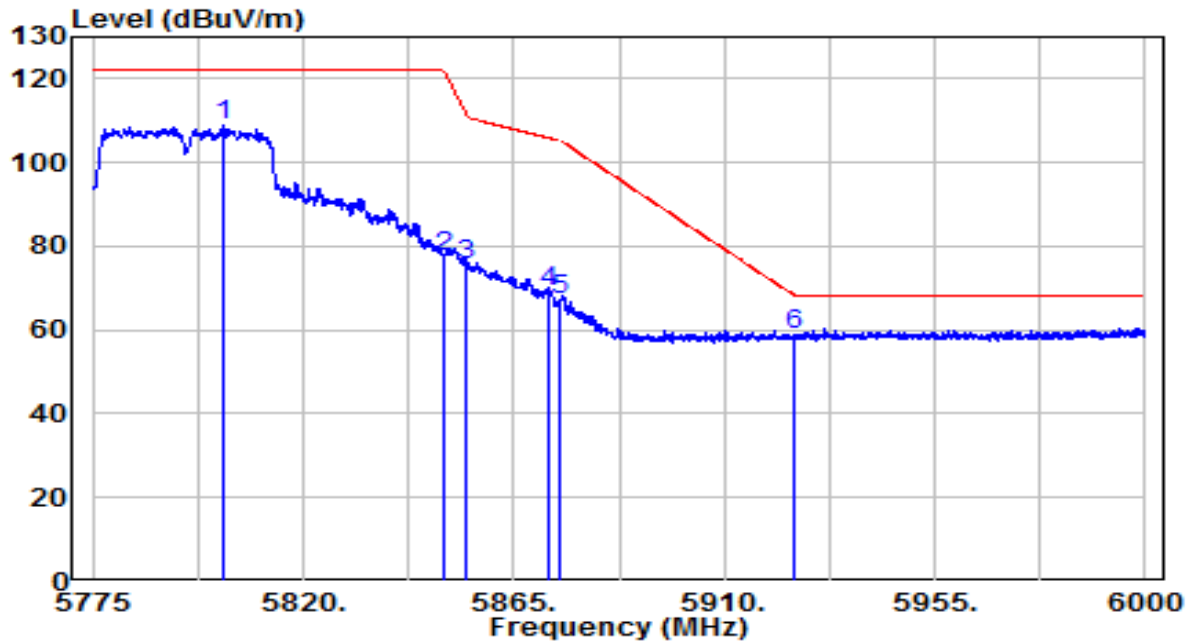


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5802.788	86.85	21.87	108.72	N/A	N/A	Peak
2	5850.000	55.24	22.04	77.29	-44.91	122.20	Peak
3	5855.000	53.71	22.06	75.77	-35.03	110.80	Peak
4	5872.763	47.24	22.13	69.37	-36.45	105.83	Peak
5	5875.000	45.10	22.14	67.23	-37.97	105.20	Peak
6	* 5925.000	36.39	22.32	58.71	-9.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

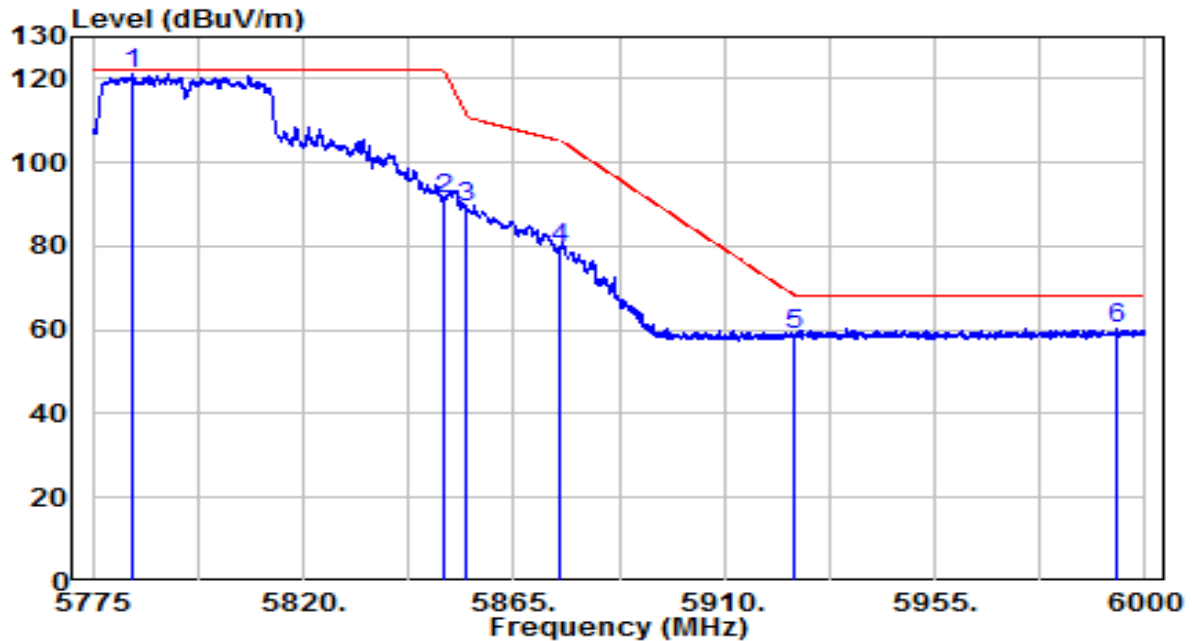


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5783.550	99.37	21.80	121.17	N/A	N/A	Peak
2		5850.000	69.15	22.04	91.19	-31.01	122.20	Peak
3		5855.000	67.28	22.06	89.35	-21.45	110.80	Peak
4		5875.000	57.52	22.14	79.66	-25.54	105.20	Peak
5		5925.000	36.70	22.32	59.02	-9.18	68.20	Peak
6		5994.038	38.00	22.57	60.57	-7.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

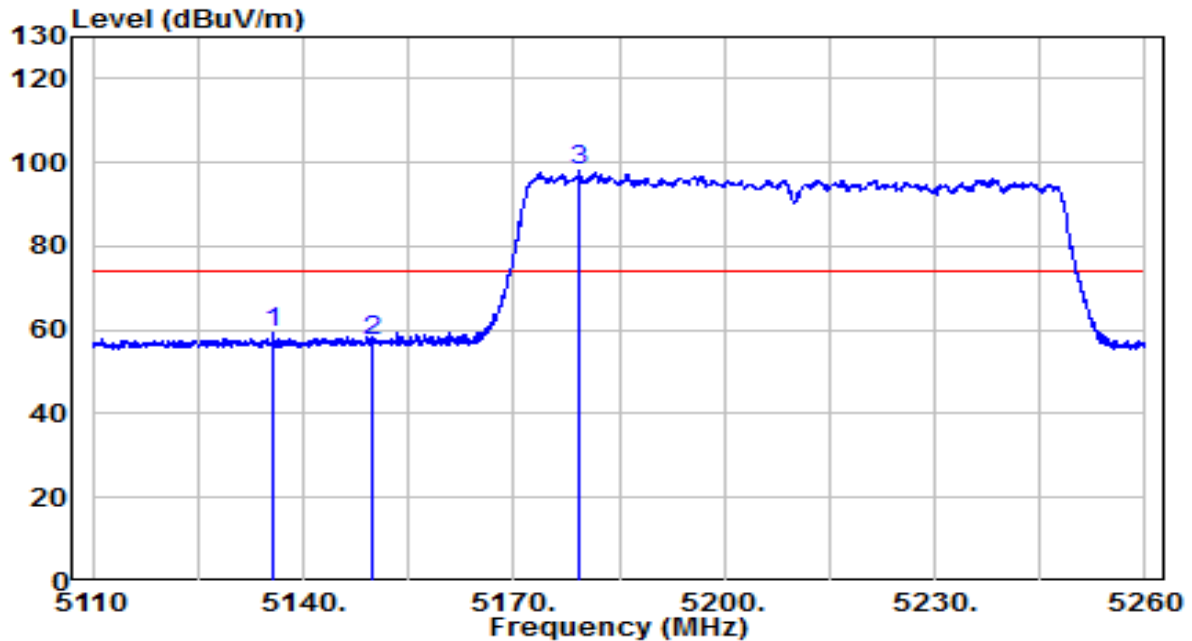


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.800	39.19	20.17	59.36	-14.64	74.00	Peak
2	5150.000	36.98	20.20	57.17	-16.83	74.00	Peak
3	* 5179.375	77.97	20.24	98.22	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

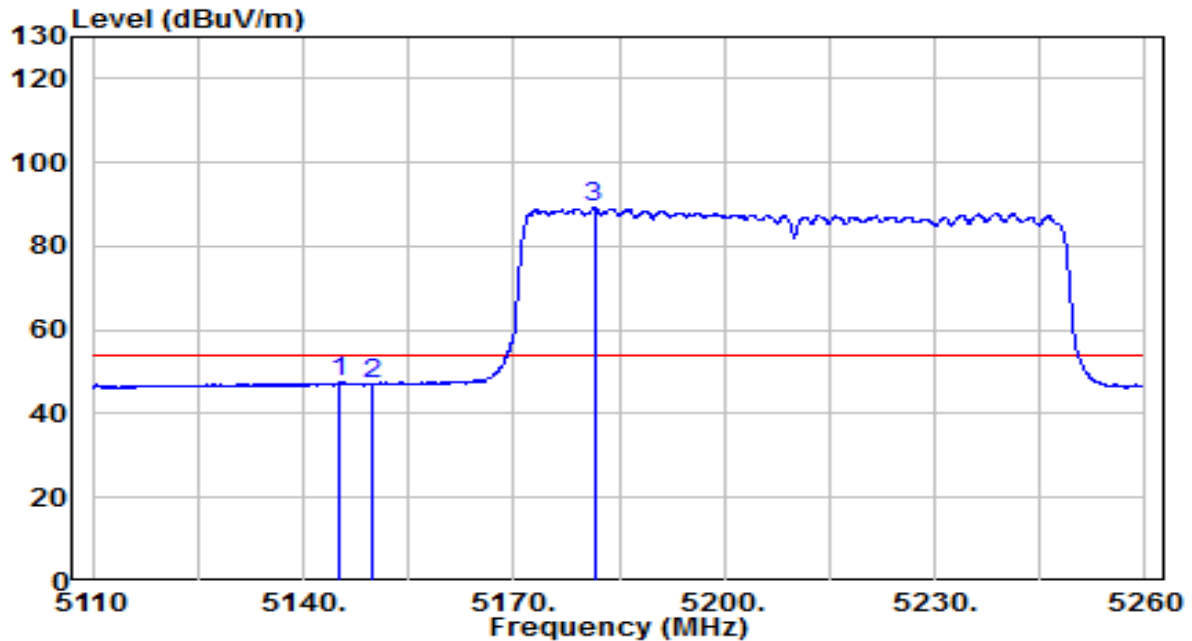


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.175	27.22	20.19	47.40	-6.60	54.00	Average
2	5150.000	27.13	20.20	47.33	-6.67	54.00	Average
3	* 5181.475	69.08	20.25	89.32	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

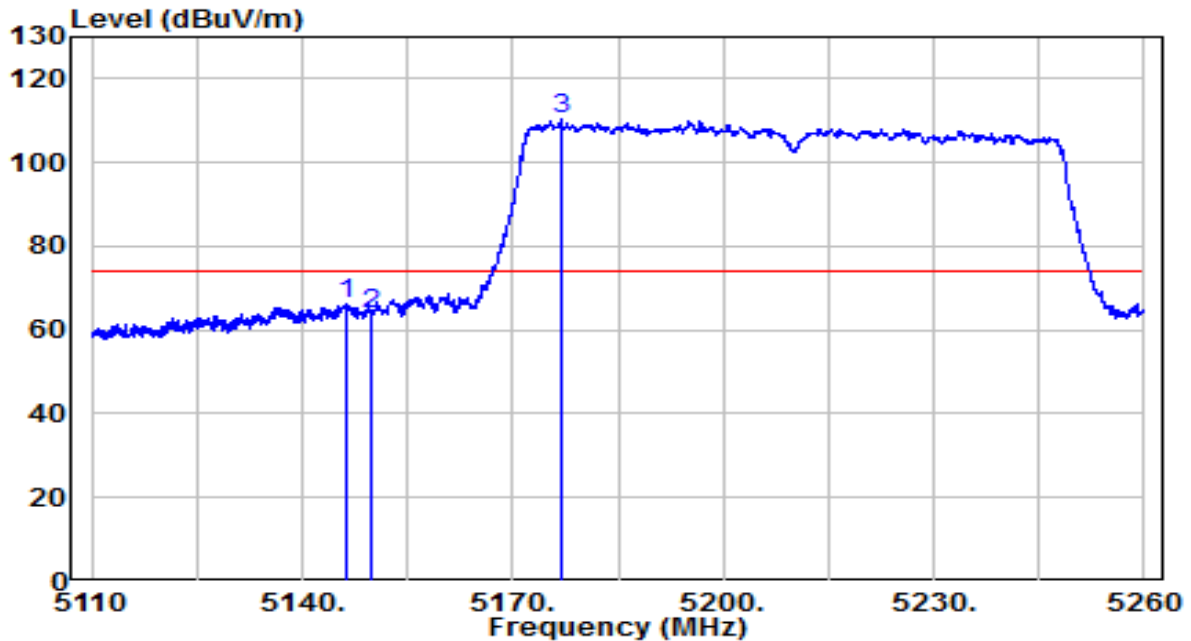


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.300	46.24	20.19	66.43	-7.57	74.00	Peak
2	5150.000	43.67	20.20	63.87	-10.13	74.00	Peak
3	* 5176.825	90.01	20.24	110.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

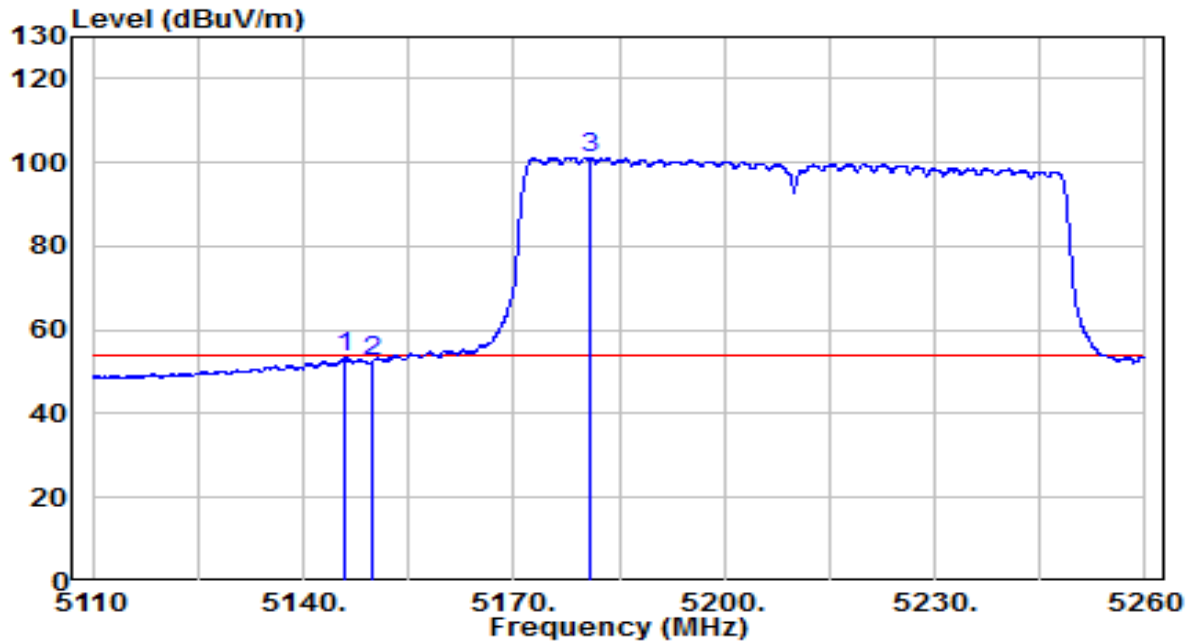


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.925	33.31	20.19	53.50	-0.50	54.00	Average
2	5150.000	32.43	20.20	52.63	-1.37	54.00	Average
3	* 5181.025	80.99	20.25	101.24	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

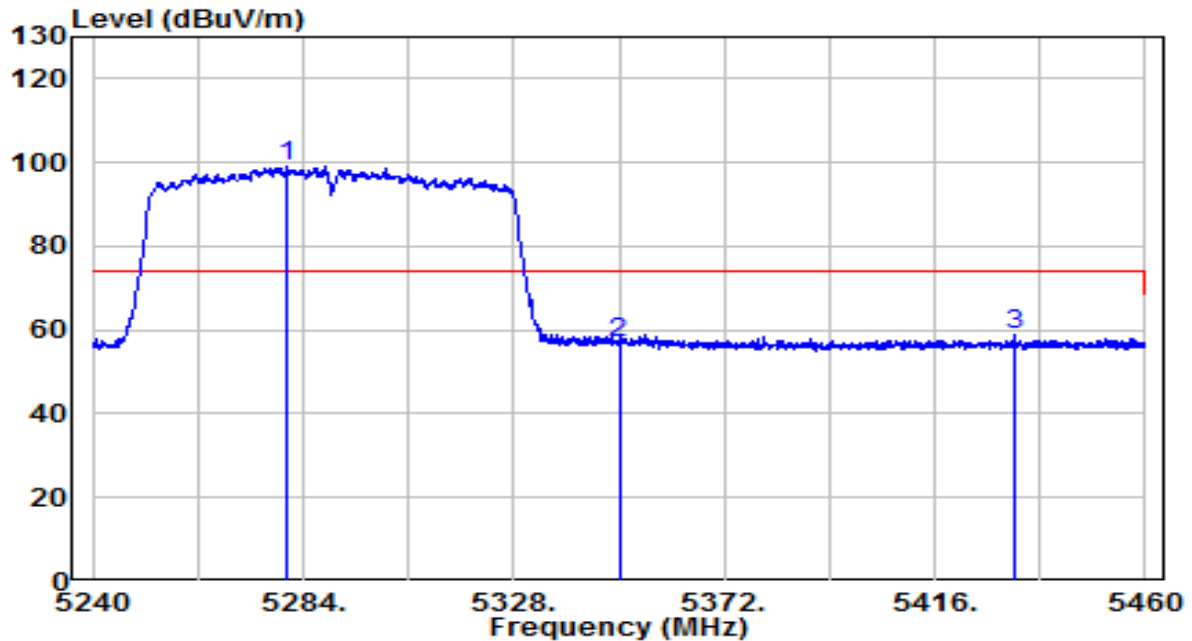


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5280.480	78.71	20.41	99.12	N/A	N/A	Peak
2		5350.000	36.27	20.52	56.80	-17.20	74.00	Peak
3		5432.500	38.03	20.66	58.68	-15.32	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

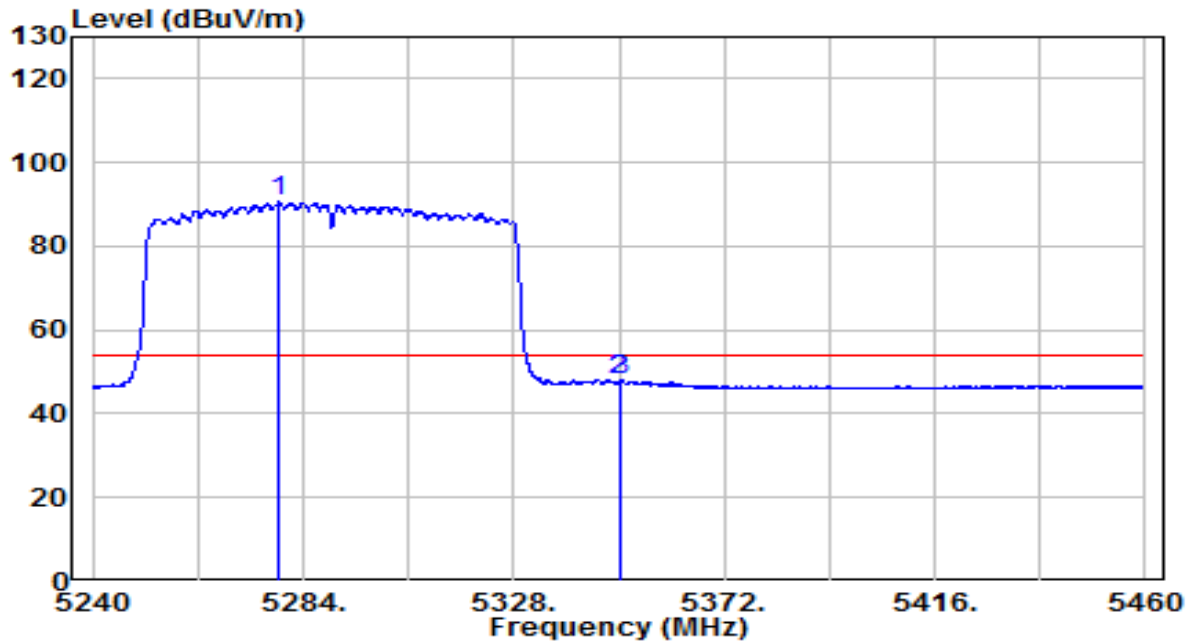


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5278.830	70.21	20.41	90.62	N/A	N/A	Average
2		5350.000	27.62	20.52	48.15	-5.85	54.00	Average
3		5350.220	27.68	20.52	48.20	-5.80	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

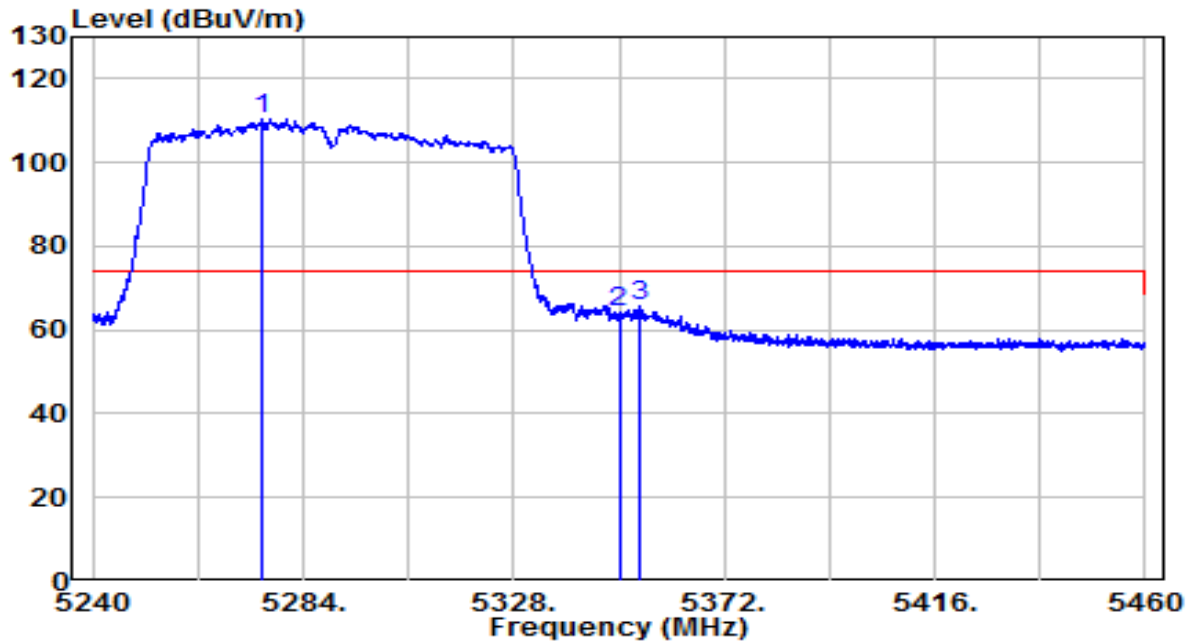


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5275.310	89.92	20.40	110.33	N/A	N/A	Peak
2		5350.000	43.51	20.52	64.03	-9.97	74.00	Peak
3		5354.400	45.04	20.53	65.57	-8.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

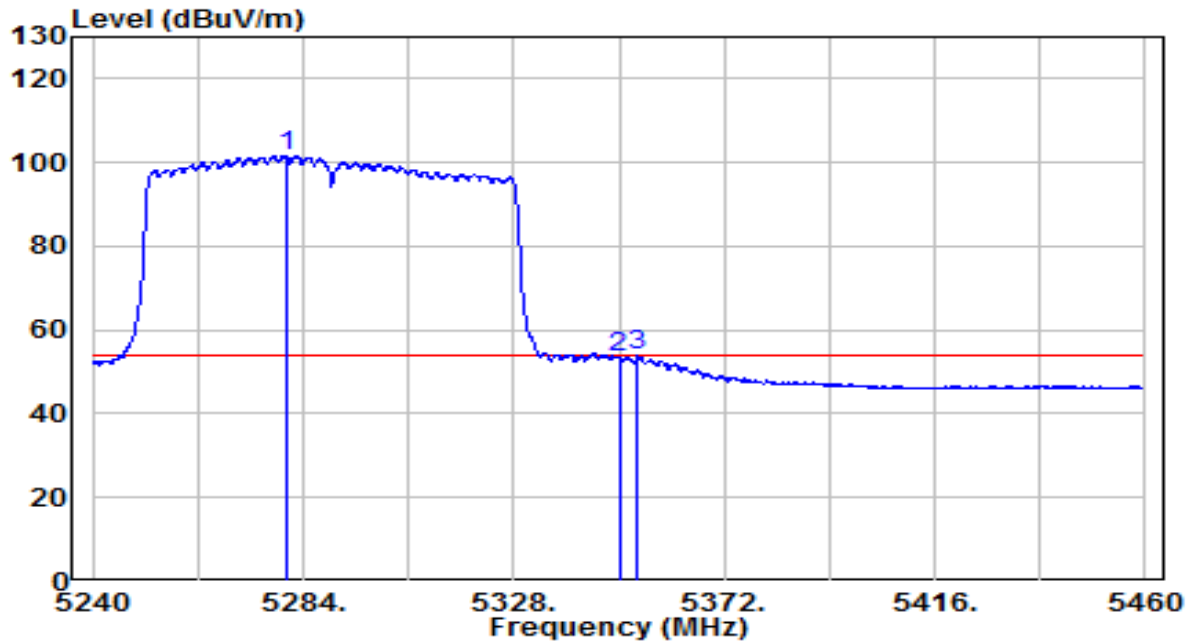


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5280.480	81.14	20.41	101.55	N/A	N/A	Average
2		5350.000	32.95	20.52	53.47	-0.53	54.00	Average
3		5353.960	33.29	20.53	53.82	-0.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

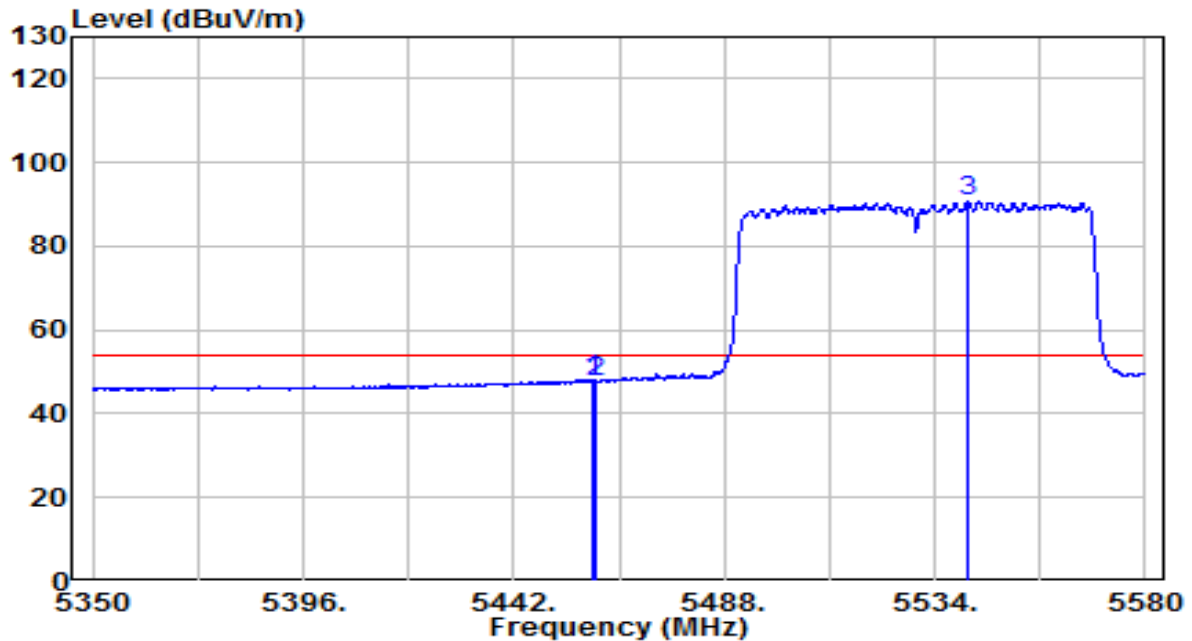


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.135	27.49	20.70	48.20	-5.80	54.00	Average
2	5460.055	26.88	20.70	47.58	-6.42	54.00	Average
3	* 5541.130	69.77	20.92	90.69	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

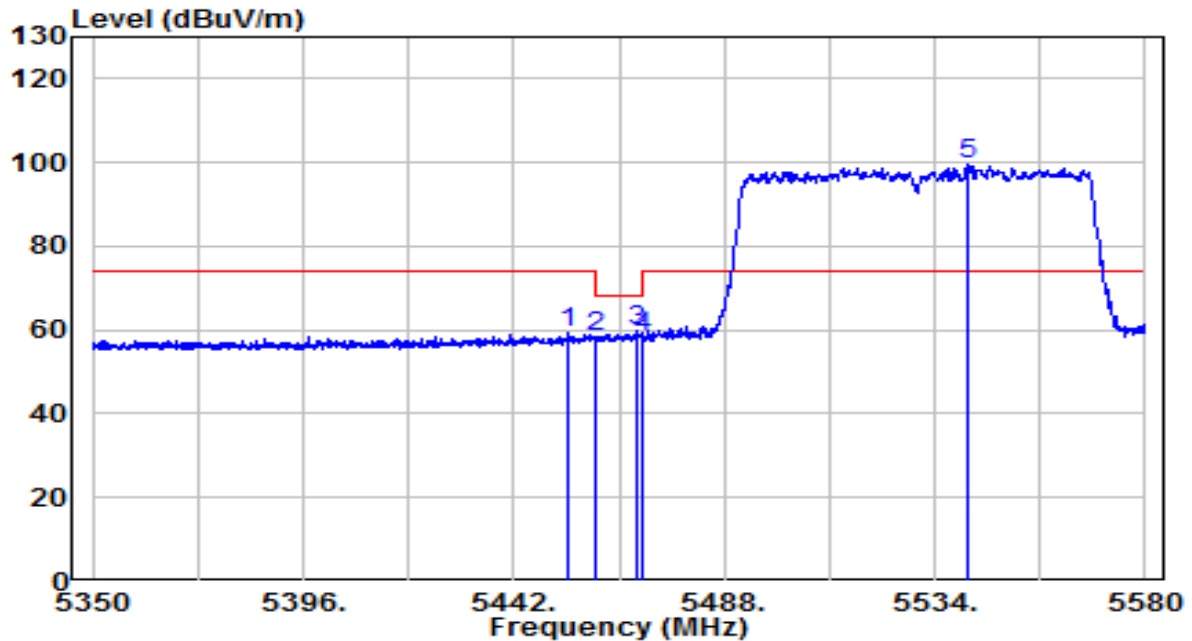


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.075	38.84	20.69	59.53	-14.47	74.00	Peak
2	5460.000	37.83	20.70	58.54	-9.66	68.20	Peak
3	5469.140	39.09	20.72	59.81	-8.39	68.20	Peak
4	5470.000	37.60	20.72	58.32	-9.88	68.20	Peak
5	* 5541.245	78.75	20.92	99.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

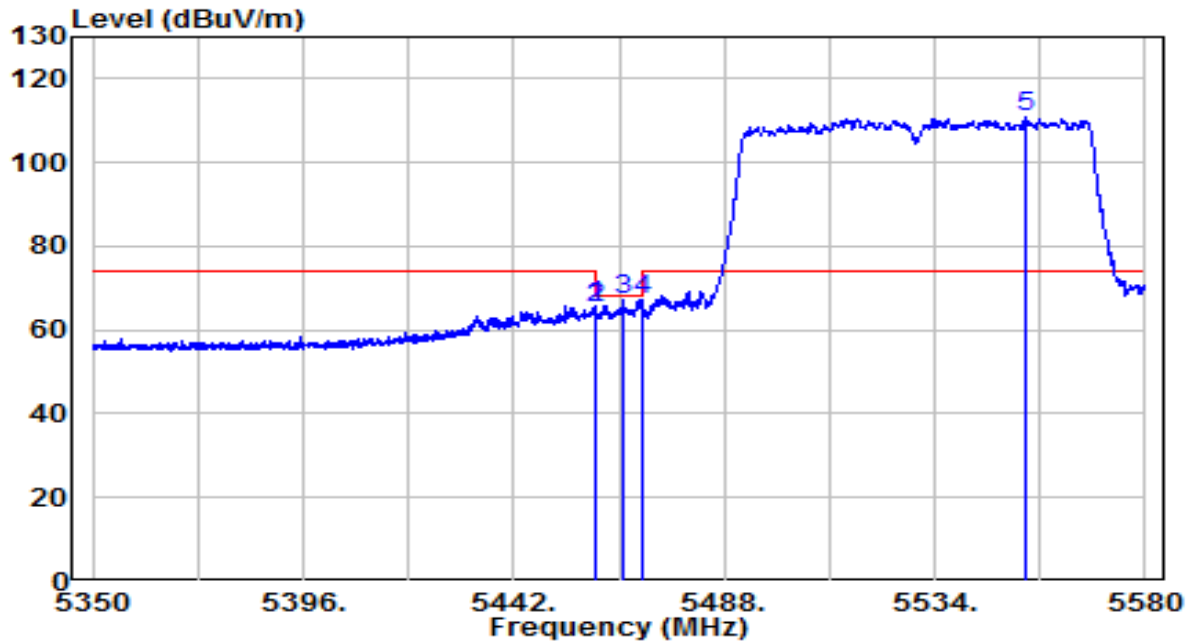


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.710	45.05	20.70	65.76	-8.24	74.00	Peak
2	5460.000	44.35	20.70	65.06	-3.14	68.20	Peak
3	5466.035	46.53	20.71	67.25	-0.95	68.20	Peak
4	5470.000	46.60	20.72	67.32	-0.88	68.20	Peak
5	* 5553.895	89.84	20.97	110.80	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

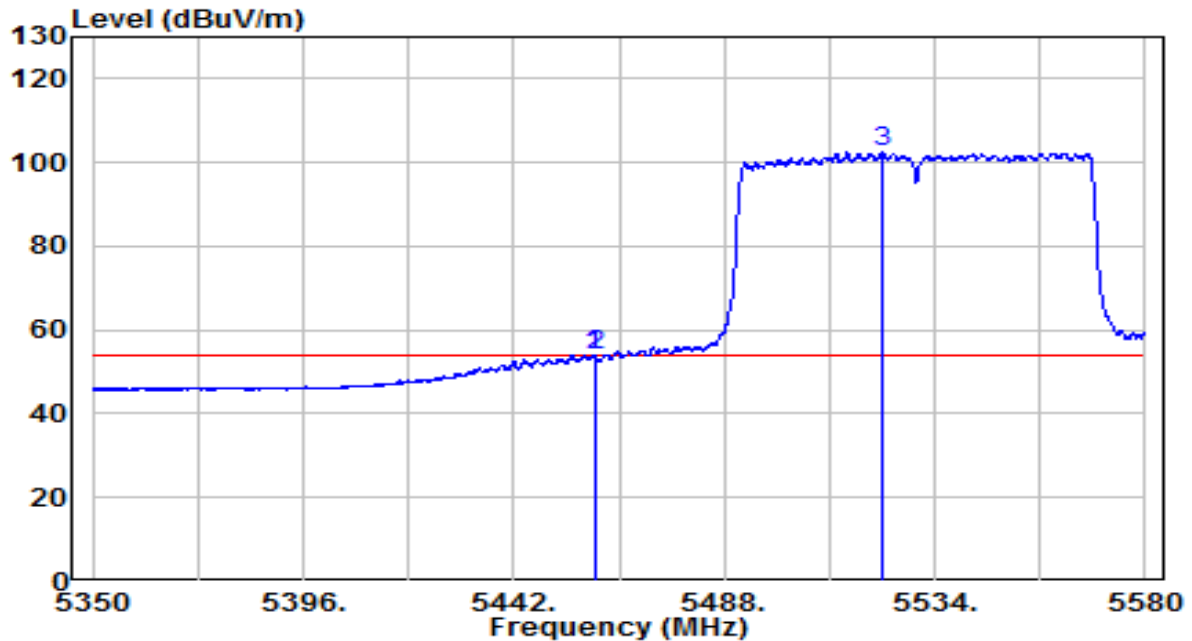


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.595	33.46	20.70	54.17	0.17	54.00	Average
2	5460.000	33.11	20.70	53.81	-0.19	54.00	Average
3	* 5522.500	81.68	20.85	102.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

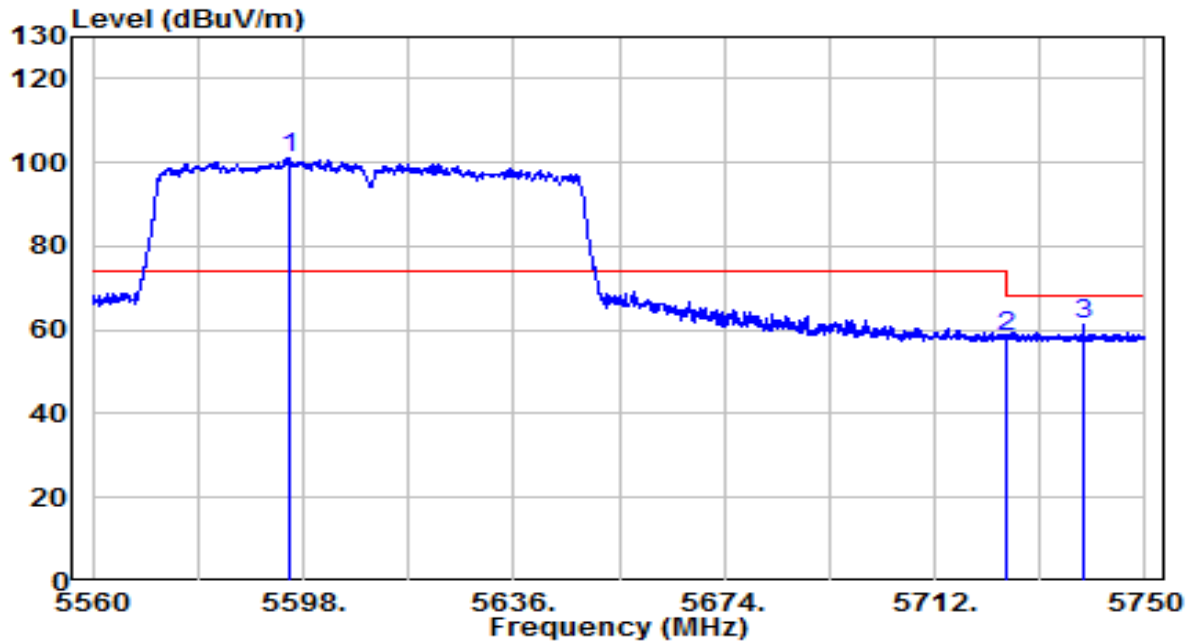


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5595.340	79.93	21.12	101.05	N/A	N/A	Peak
2		5725.000	36.98	21.59	58.56	-9.64	68.20	Peak
3		5738.980	39.49	21.64	61.13	-7.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

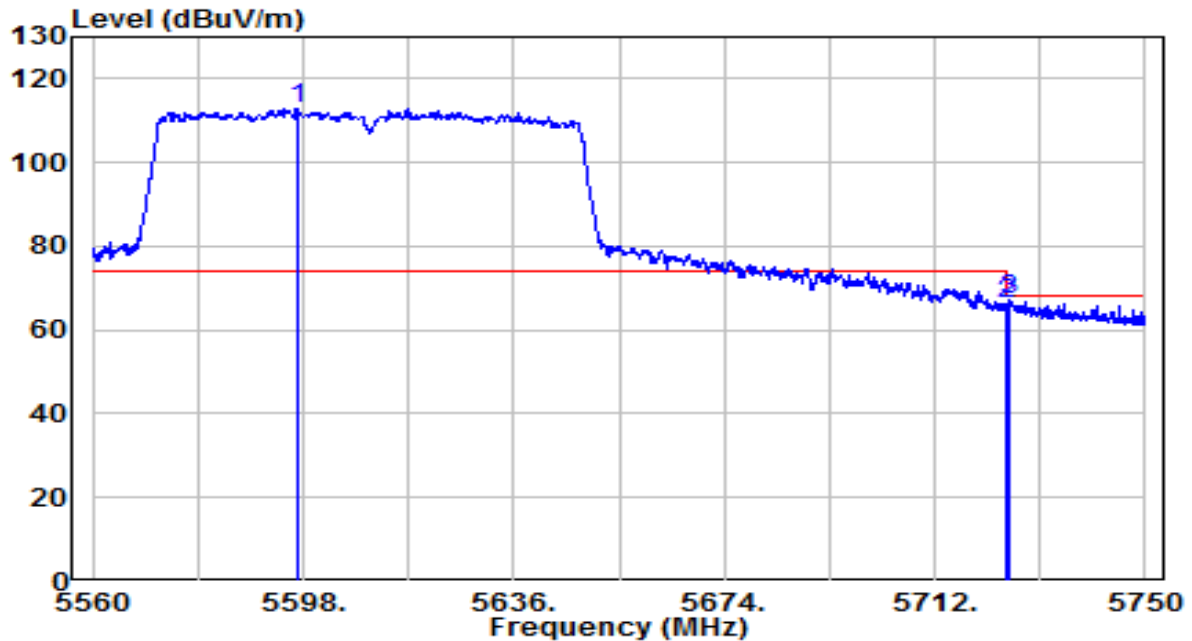


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5597.050	91.56	21.12	112.69	N/A	N/A	Peak
2		5725.000	44.61	21.59	66.20	-2.00	68.20	Peak
3		5725.205	45.84	21.59	67.43	-0.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

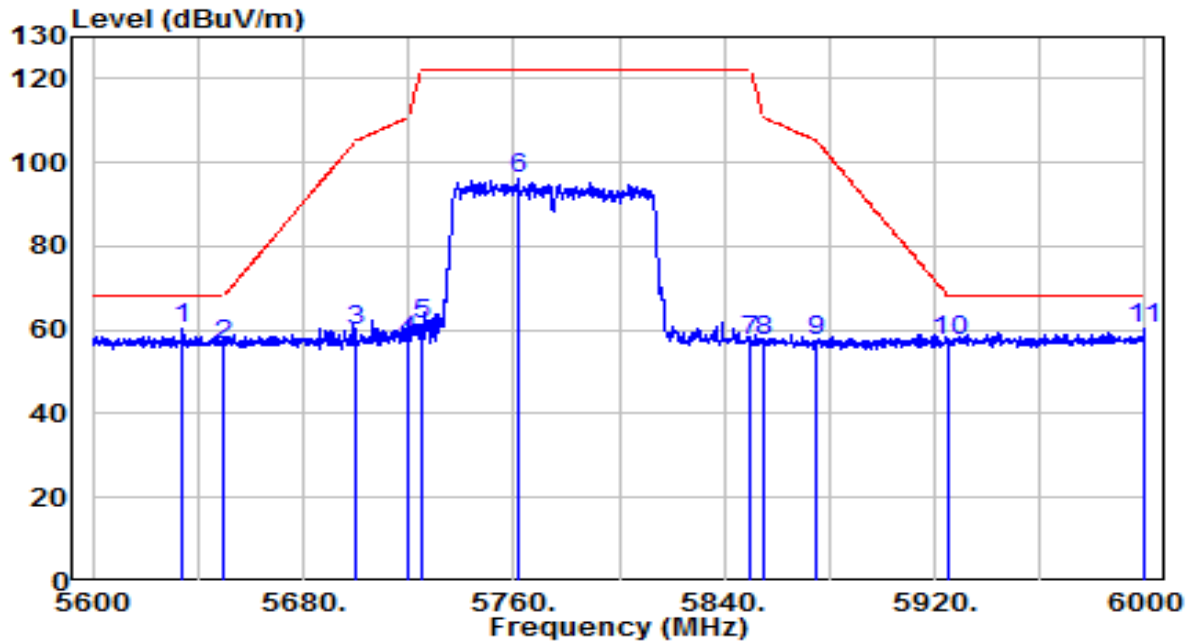

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5634.400	39.08	21.26	60.34	-7.86	68.20	Peak
2		5650.000	35.21	21.32	56.52	-11.68	68.20	Peak
3		5700.000	38.53	21.50	60.02	-45.18	105.20	Peak
4		5720.000	36.02	21.57	57.59	-53.21	110.80	Peak
5		5725.000	39.85	21.59	61.44	-60.76	122.20	Peak
6		5761.600	74.35	21.72	96.07	N/A	N/A	Peak
7		5850.000	35.48	22.04	57.52	-64.68	122.20	Peak
8		5855.000	35.16	22.06	57.22	-53.58	110.80	Peak
9		5875.000	35.06	22.14	57.20	-48.00	105.20	Peak
10		5925.000	35.05	22.32	57.36	-10.84	68.20	Peak
11		5999.600	37.69	22.59	60.28	-7.92	68.20	Peak


Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

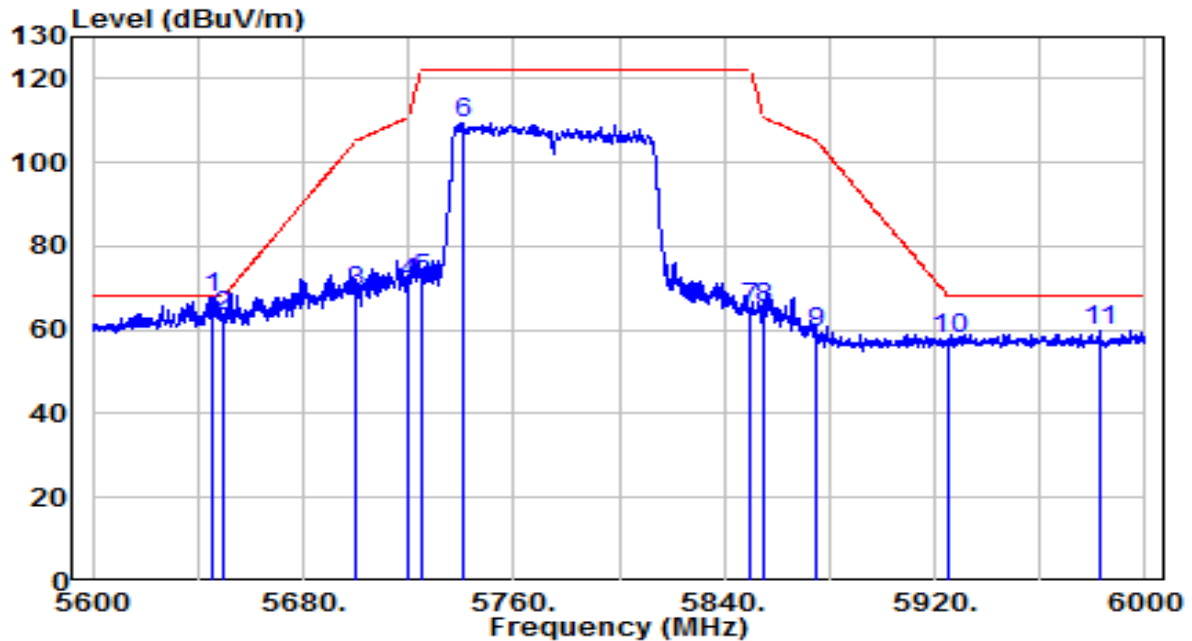

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5645.600	46.54	21.30	67.84	-0.36	68.20	Peak
2		5650.000	42.04	21.32	63.36	-4.84	68.20	Peak
3		5700.000	47.58	21.50	69.08	-36.12	105.20	Peak
4		5720.000	49.40	21.57	70.97	-39.83	110.80	Peak
5		5725.000	50.38	21.59	71.97	-50.23	122.20	Peak
6		5740.800	87.88	21.65	109.53	N/A	N/A	Peak
7		5850.000	43.04	22.04	65.08	-57.12	122.20	Peak
8		5855.000	43.28	22.06	65.34	-45.46	110.80	Peak
9		5875.000	37.05	22.14	59.18	-46.02	105.20	Peak
10		5925.000	35.48	22.32	57.80	-10.40	68.20	Peak
11		5982.800	37.29	22.53	59.82	-8.38	68.20	Peak


Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

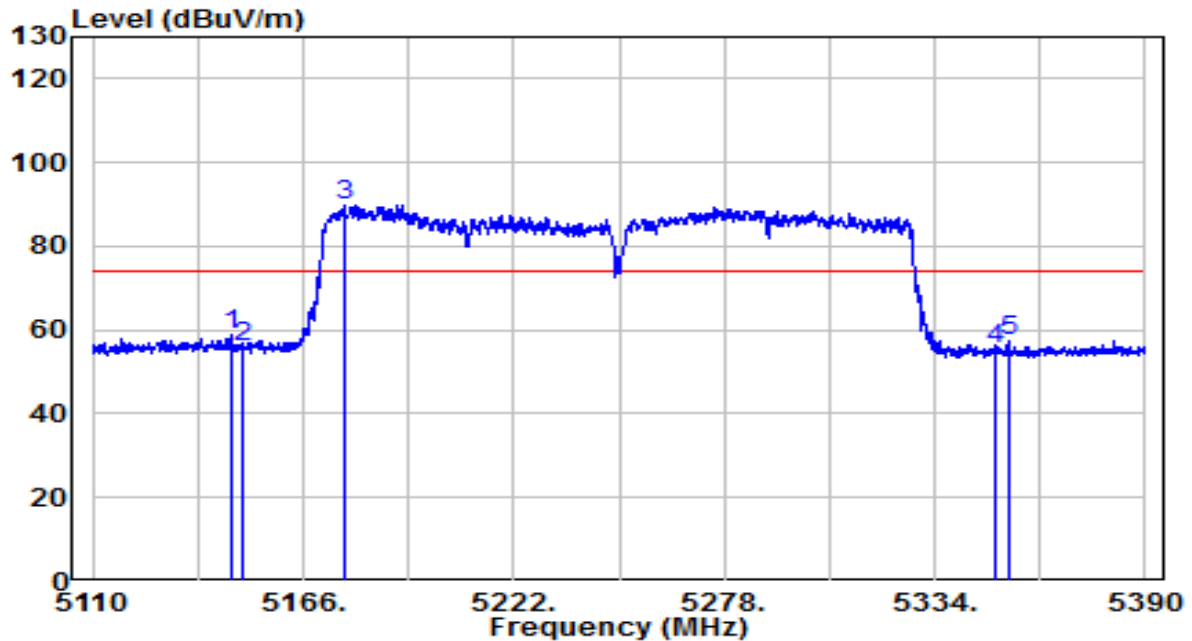


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.100	38.72	20.19	58.91	-15.09	74.00	Peak
2	5150.040	35.71	20.20	55.90	-18.10	74.00	Peak
3	* 5176.920	69.62	20.24	89.86	N/A	N/A	Peak
4	5350.000	35.07	20.52	55.59	-18.41	74.00	Peak
5	5353.740	36.88	20.53	57.41	-16.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

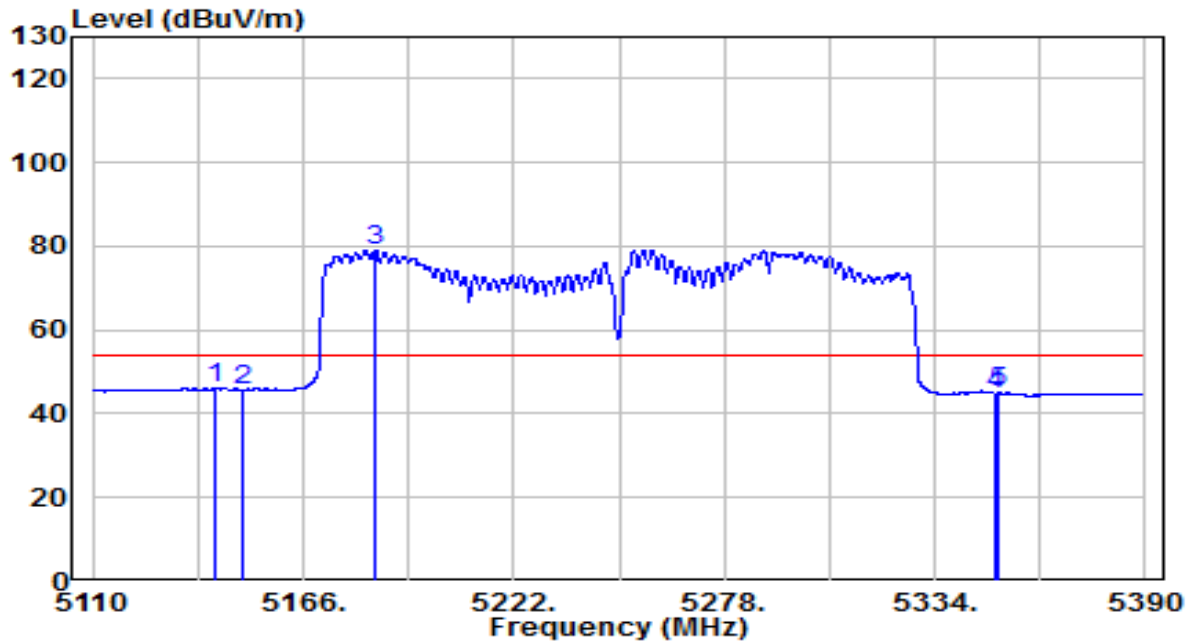


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.620	25.84	20.18	46.02	-7.98	54.00	Average
2	5150.000	25.56	20.20	45.76	-8.24	54.00	Average
3	* 5185.040	58.90	20.25	79.15	N/A	N/A	Average
4	5350.000	24.26	20.52	44.78	-9.22	54.00	Average
5	5351.220	24.56	20.53	45.08	-8.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

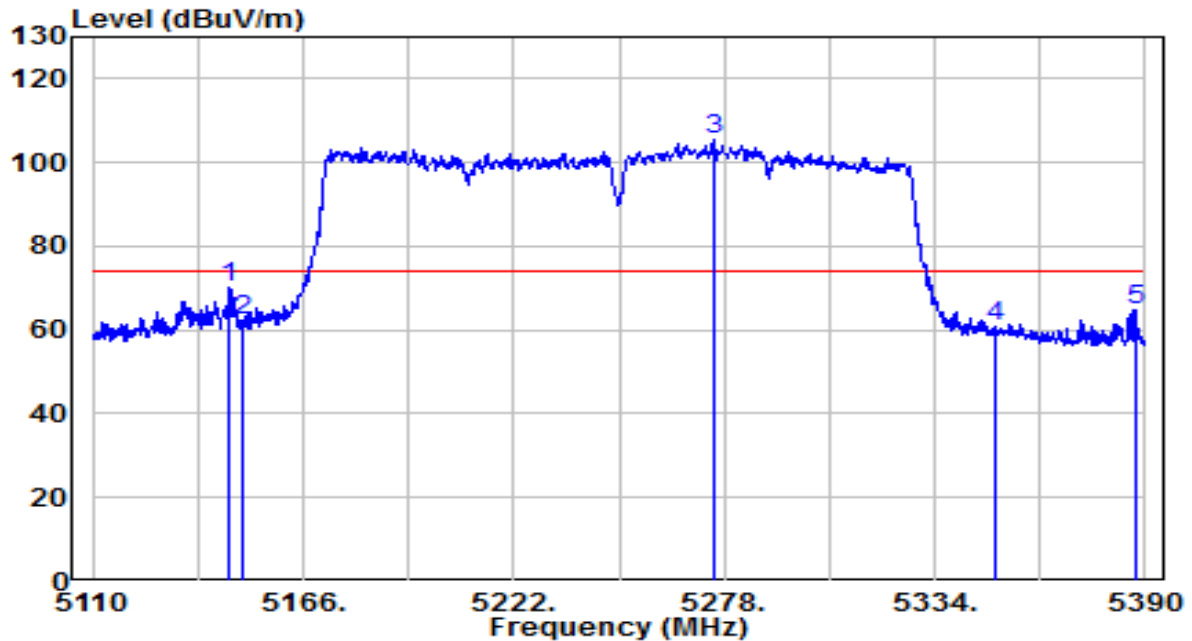


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.260	49.82	20.19	70.01	-3.99	74.00	Peak
2	5150.000	42.33	20.20	62.52	-11.48	74.00	Peak
3	* 5275.200	85.26	20.40	105.66	N/A	N/A	Peak
4	5350.000	40.51	20.52	61.03	-12.97	74.00	Peak
5	5387.480	44.14	20.59	64.73	-9.27	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

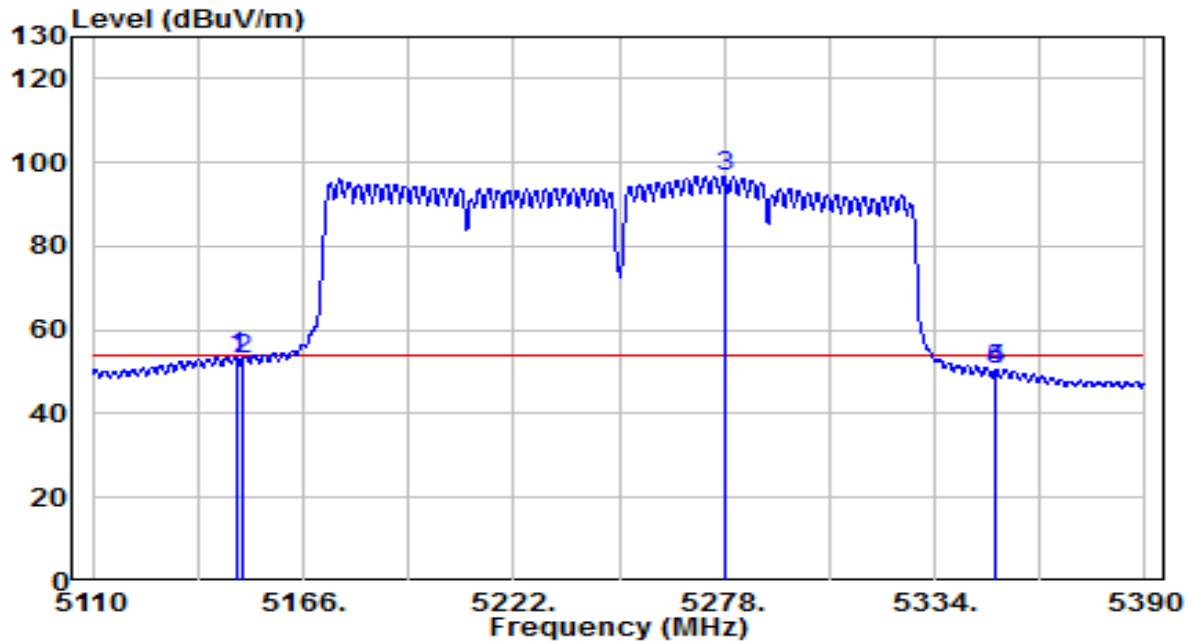


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.080	33.39	20.19	53.59	-0.41	54.00	Peak
2	5150.000	32.82	20.20	53.02	-0.98	54.00	Peak
3	* 5278.000	76.27	20.41	96.67	N/A	N/A	Peak
4	5350.000	29.83	20.52	50.35	-3.65	54.00	Peak
5	5350.240	29.99	20.52	50.51	-3.49	54.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

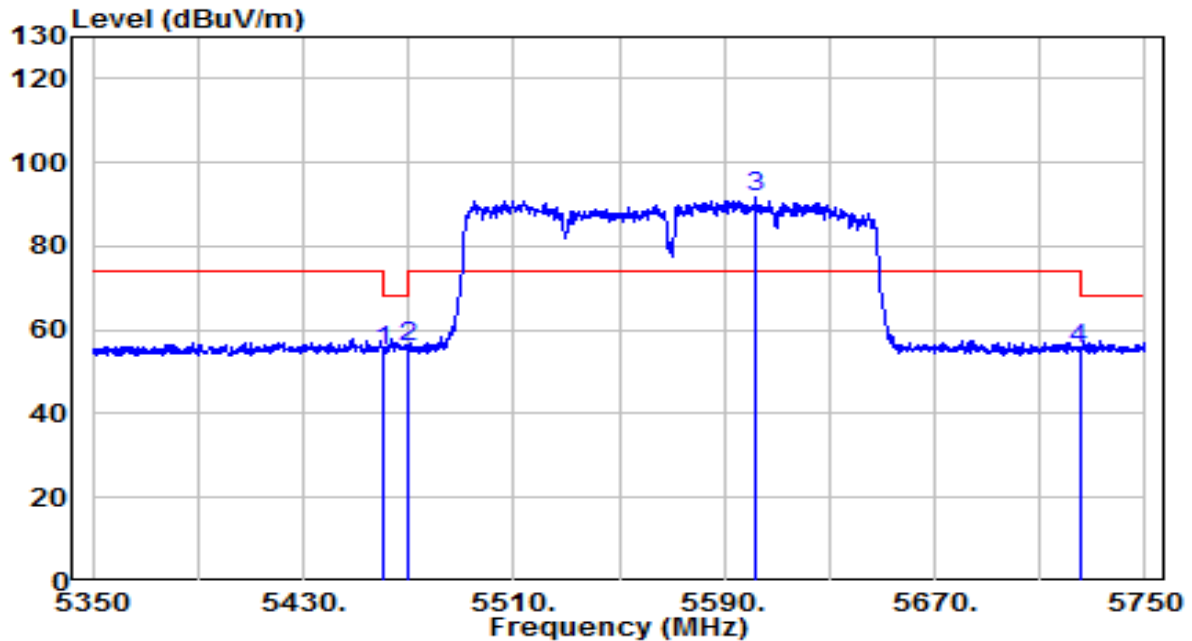


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	34.39	20.70	55.09	-13.11	68.20	Peak
2	5470.000	35.04	20.72	55.76	-12.44	68.20	Peak
3	* 5602.200	70.62	21.14	91.77	N/A	N/A	Peak
4	5725.000	33.74	21.59	55.33	-12.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

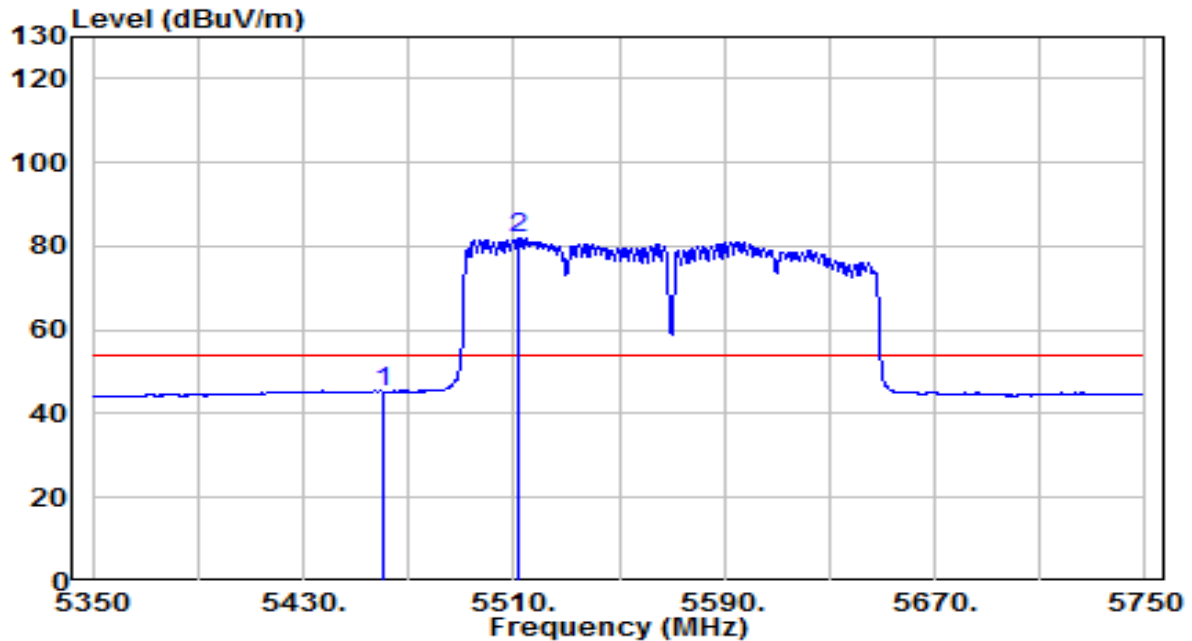


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5460.000	24.67	20.70	45.37	-8.63	54.00	Average
2	* 5512.200	61.31	20.81	82.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

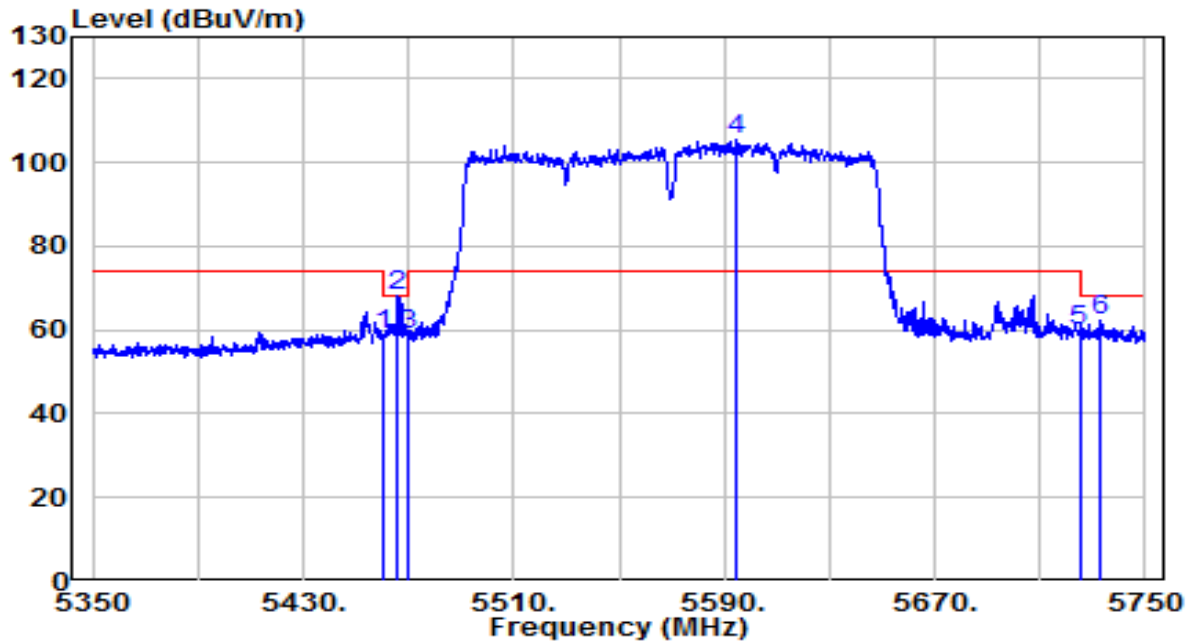


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.12	20.70	58.83	-9.37	68.20	Peak
2	5466.000	47.29	20.71	68.00	-0.20	68.20	Peak
3	5470.000	37.95	20.72	58.67	-9.53	68.20	Peak
4	* 5594.600	84.35	21.11	105.46	N/A	N/A	Peak
5	5725.000	38.44	21.59	60.03	-8.17	68.20	Peak
6	5733.200	40.82	21.62	62.44	-5.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

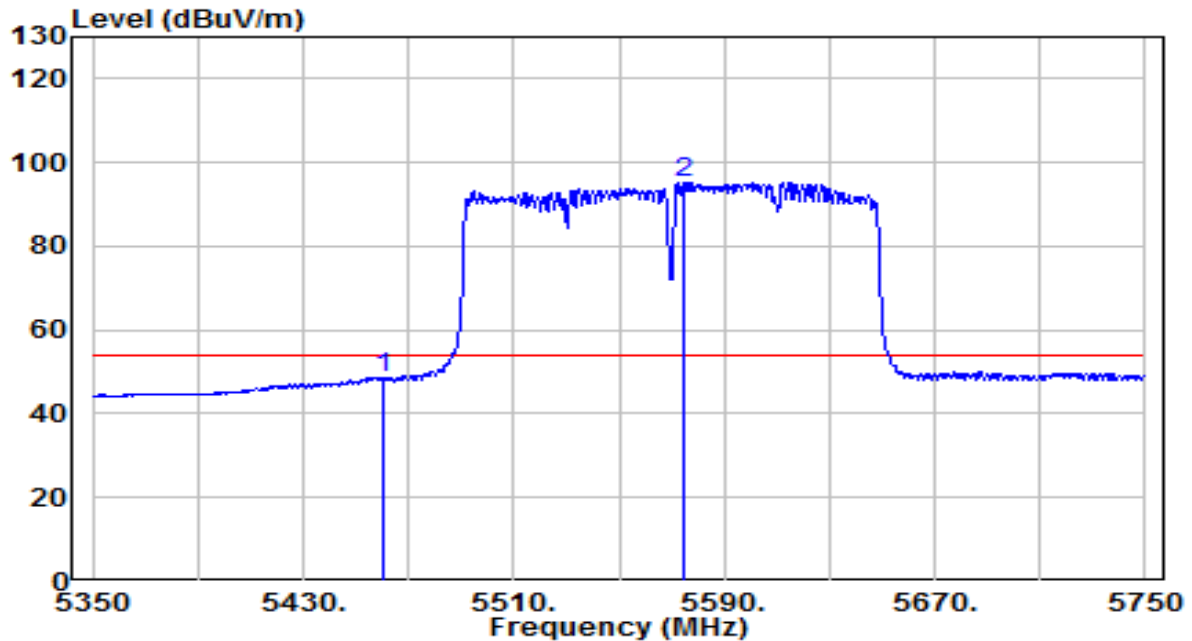


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.83	20.70	48.53	-5.47	54.00	Average
2	* 5574.800	74.30	21.04	95.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

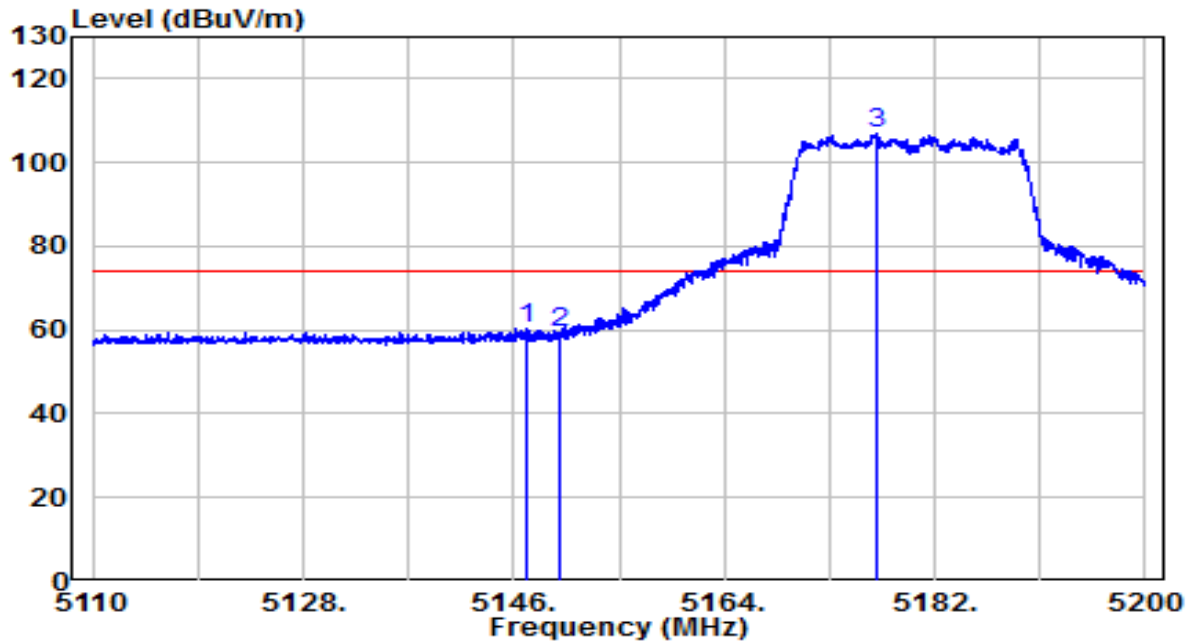


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.170	40.19	20.19	60.38	-13.62	74.00	Peak
2	5150.000	38.97	20.20	59.16	-14.84	74.00	Peak
3	* 5177.005	86.57	20.24	106.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

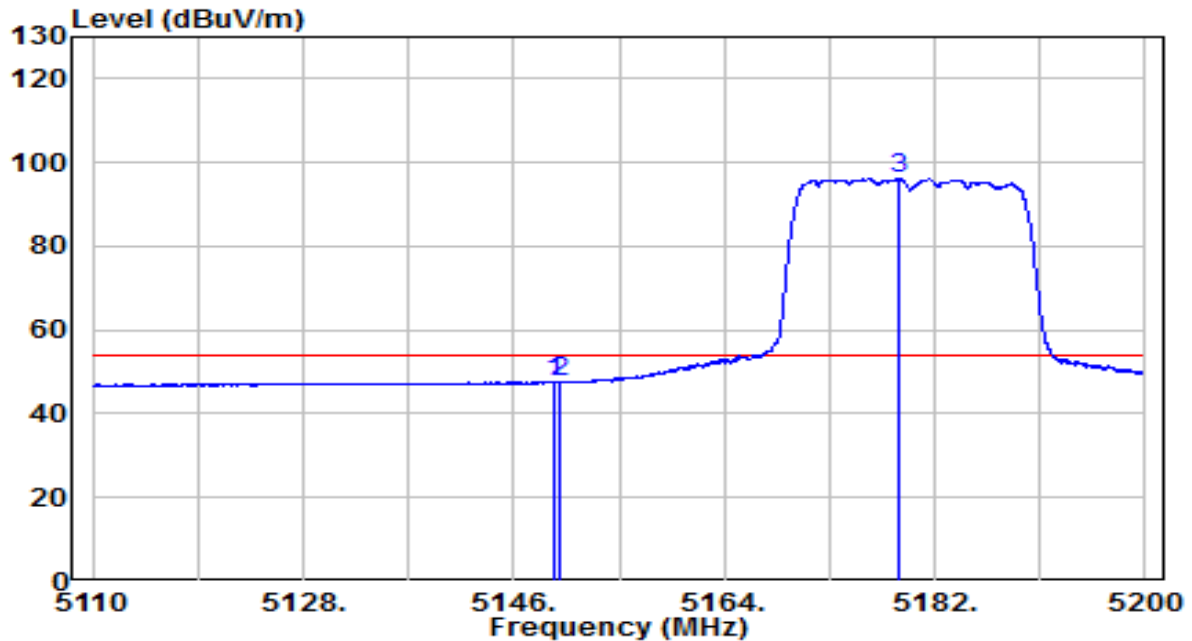


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.375	27.50	20.19	47.70	-6.30	54.00	Average
2	5150.000	27.20	20.20	47.40	-6.60	54.00	Average
3	* 5178.895	75.92	20.24	96.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

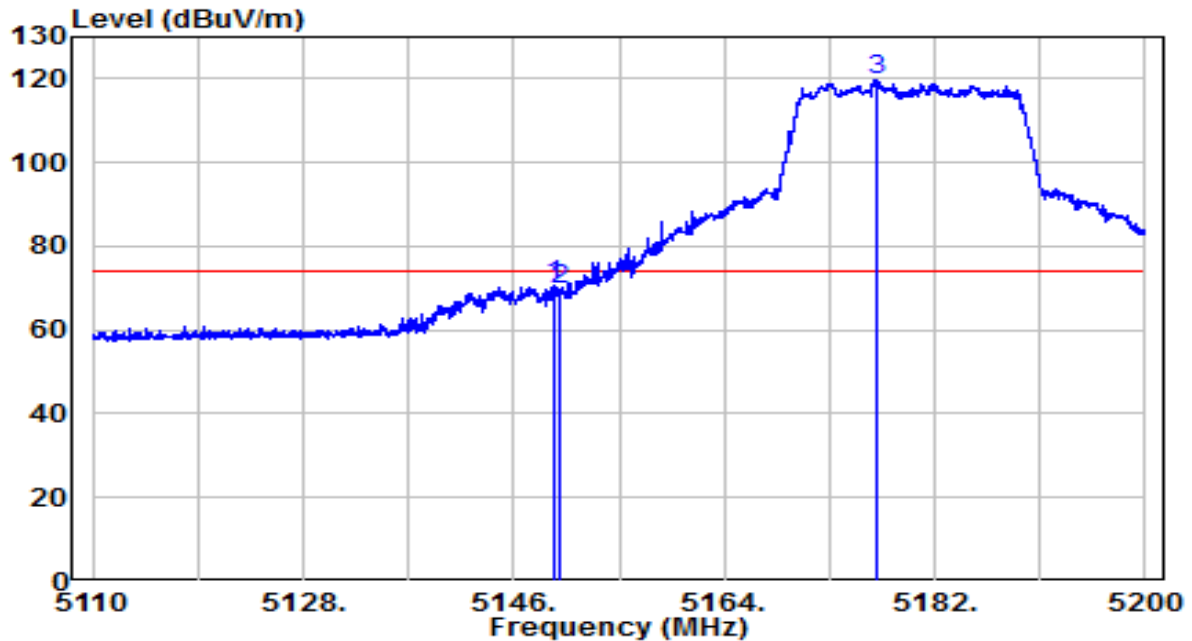


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.375	50.69	20.19	70.88	-3.12	74.00	Peak
2	5150.000	49.41	20.20	69.61	-4.39	74.00	Peak
3	* 5177.095	99.57	20.24	119.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

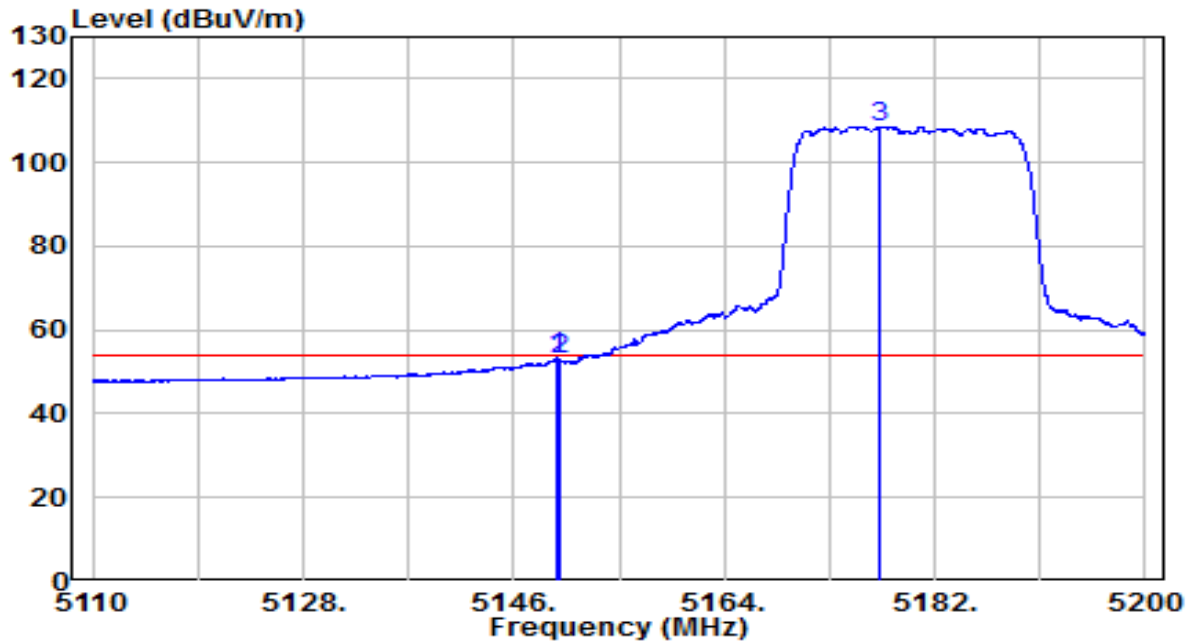


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.735	33.10	20.20	53.30	-0.70	54.00	Average
2	5150.000	32.62	20.20	52.82	-1.18	54.00	Average
3	* 5177.320	88.37	20.24	108.61	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

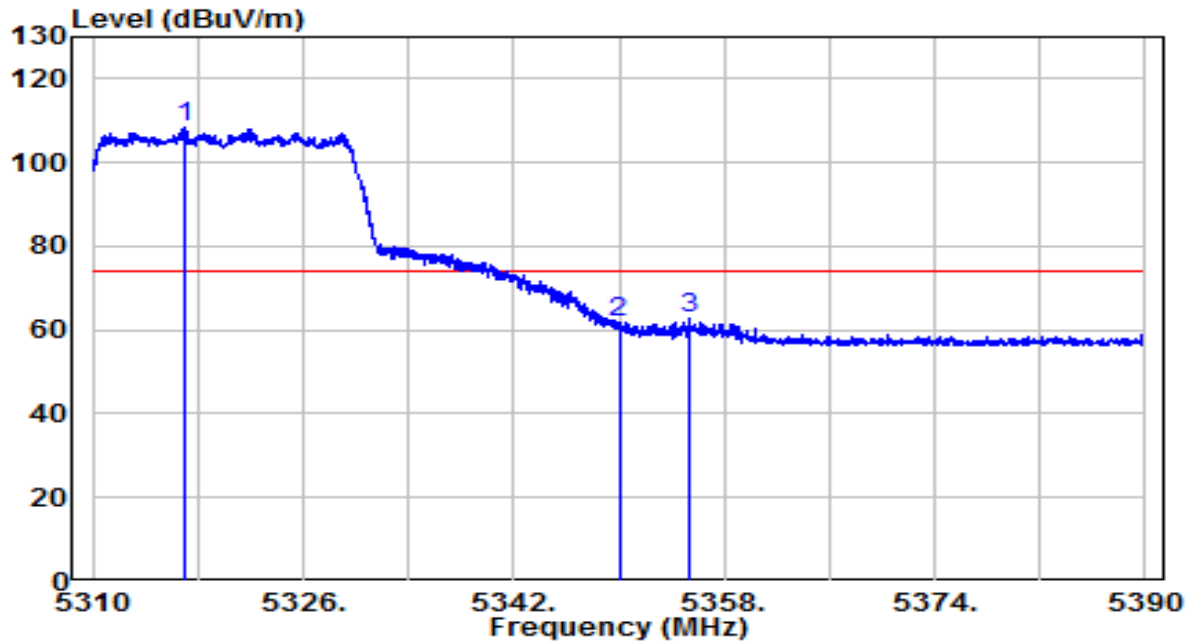


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.960	87.92	20.47	108.39	N/A	N/A	Peak
2		5350.000	41.06	20.52	61.58	-12.42	74.00	Peak
3		5355.280	42.23	20.53	62.76	-11.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

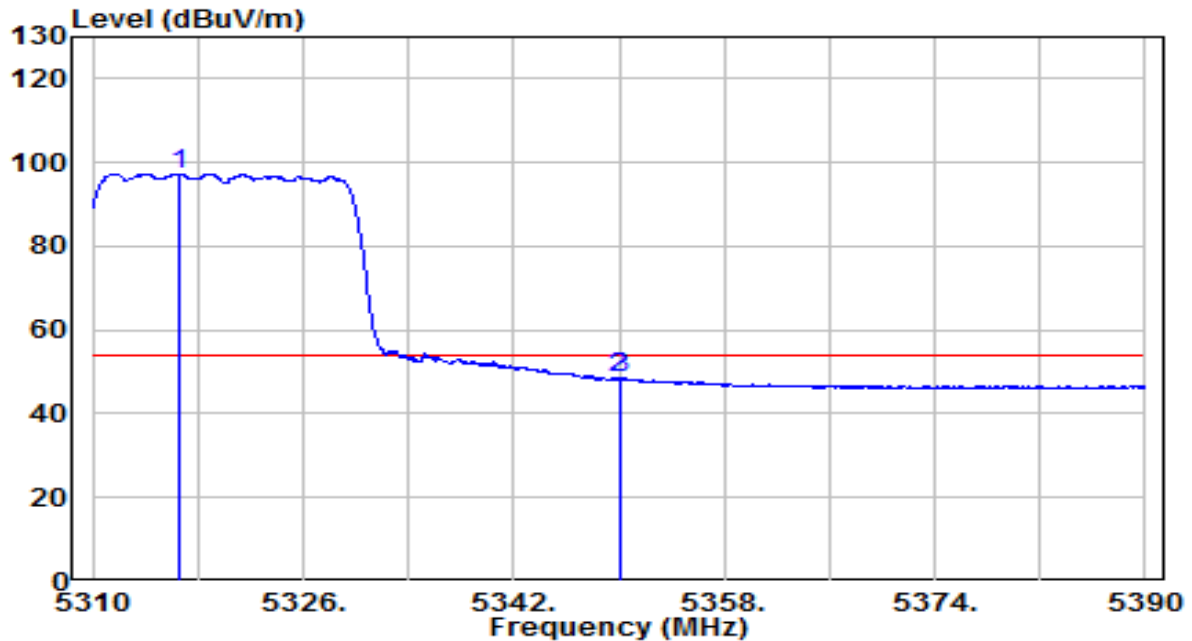


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.600	76.87	20.47	97.34	N/A	N/A	Average
2		5350.000	27.87	20.52	48.40	-5.60	54.00	Average
3		5350.040	27.95	20.52	48.47	-5.53	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

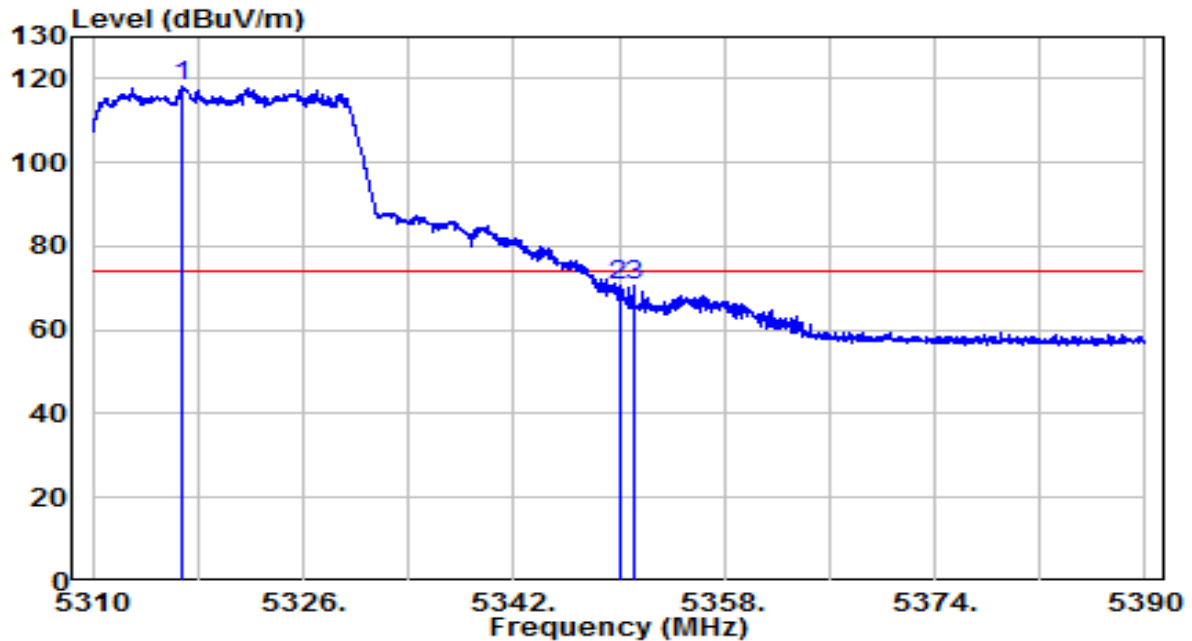


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.840	97.78	20.47	118.25	N/A	N/A	Peak
2		5350.000	50.01	20.52	70.54	-3.46	74.00	Peak
3		5351.120	50.33	20.53	70.86	-3.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

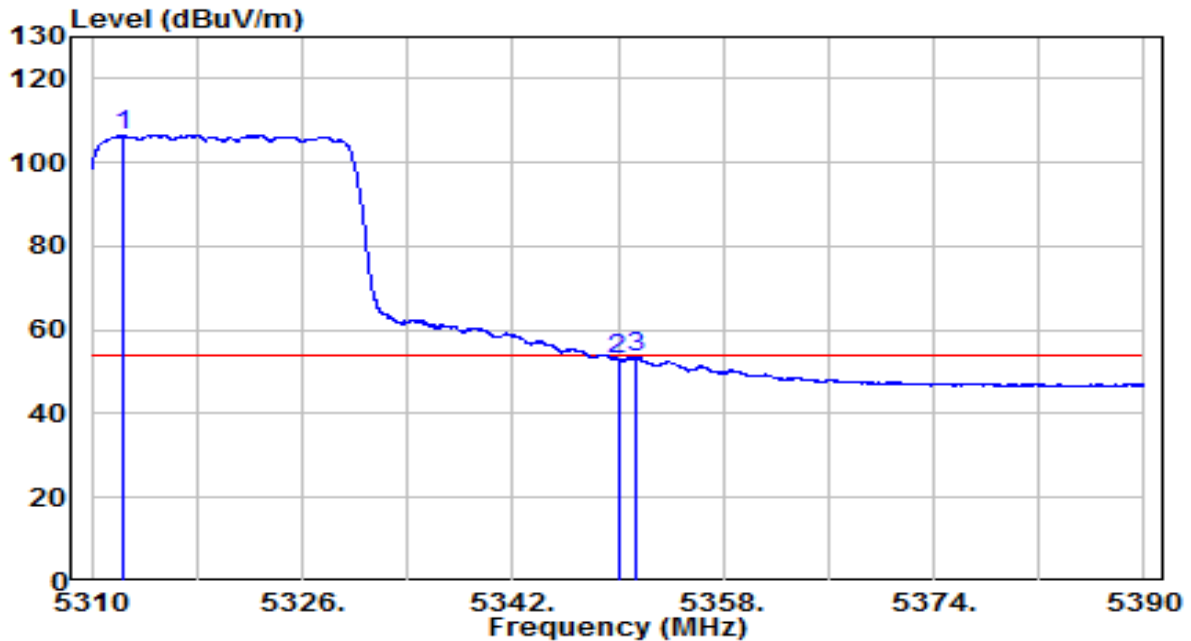


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5312.440	86.04	20.46	106.50	N/A	N/A	Average
2		5350.000	32.67	20.52	53.20	-0.80	54.00	Average
3		5351.280	33.12	20.53	53.65	-0.35	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

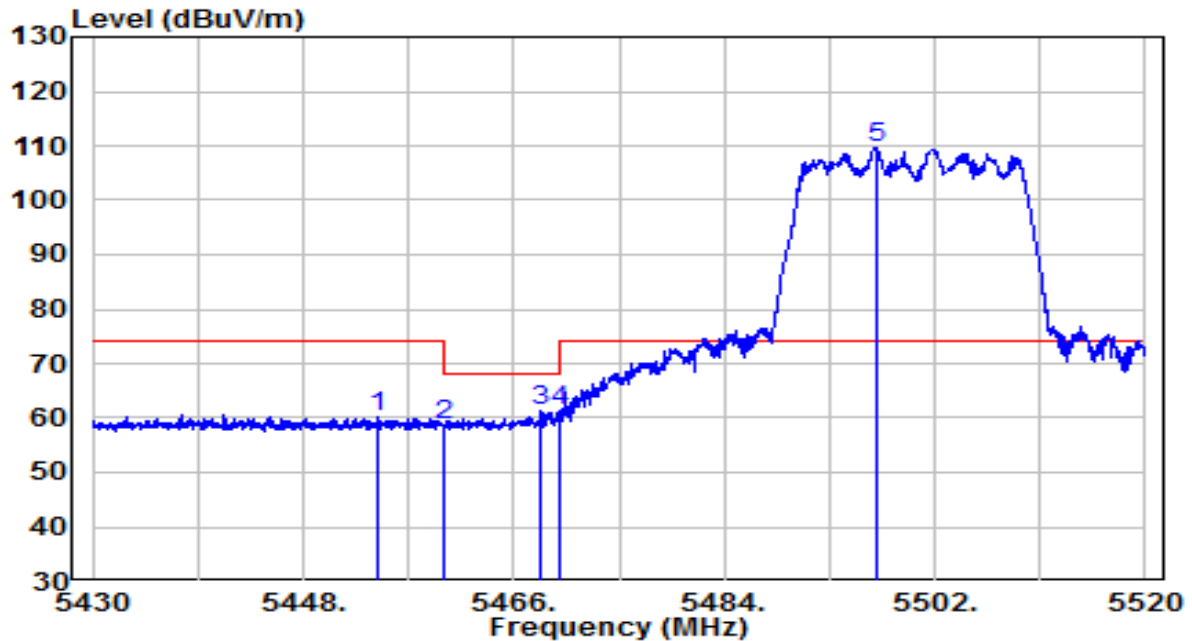


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.390	39.49	20.70	60.18	-13.82	74.00	Peak
2	5460.000	37.96	20.70	58.67	-9.53	68.20	Peak
3	5468.295	40.48	20.72	61.20	-7.00	68.20	Peak
4	5470.000	40.65	20.72	61.37	-6.83	68.20	Peak
5	* 5496.960	88.81	20.77	109.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

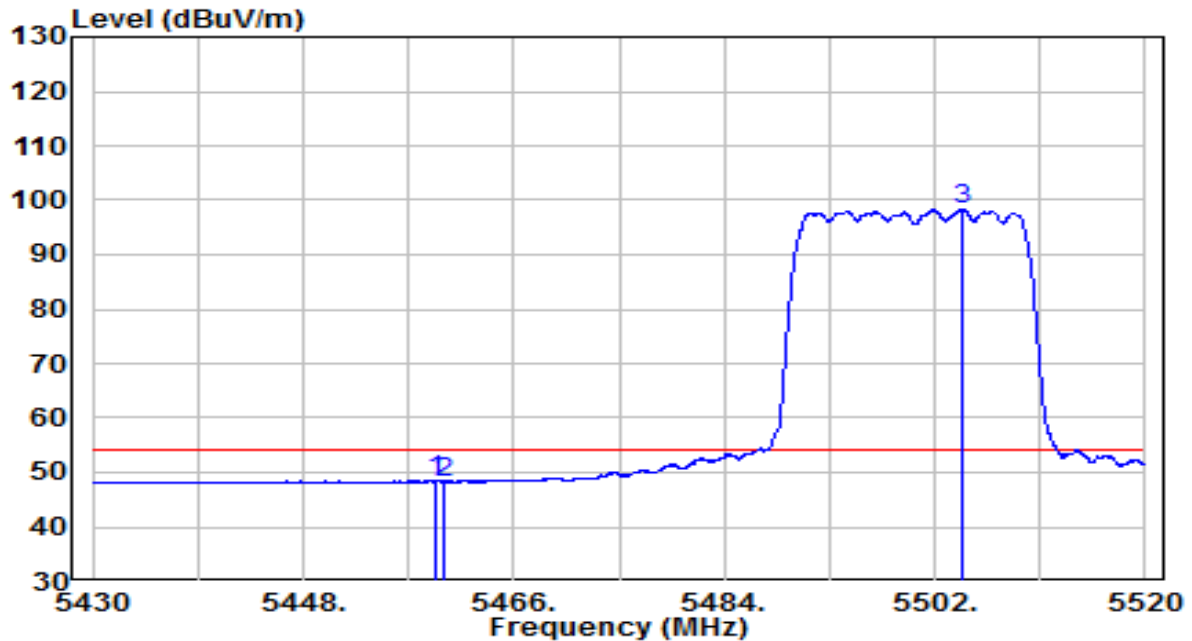


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.430	27.73	20.70	48.44	-5.56	54.00	Average
2	5460.000	27.56	20.70	48.26	-5.74	54.00	Average
3	* 5504.250	77.44	20.79	98.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

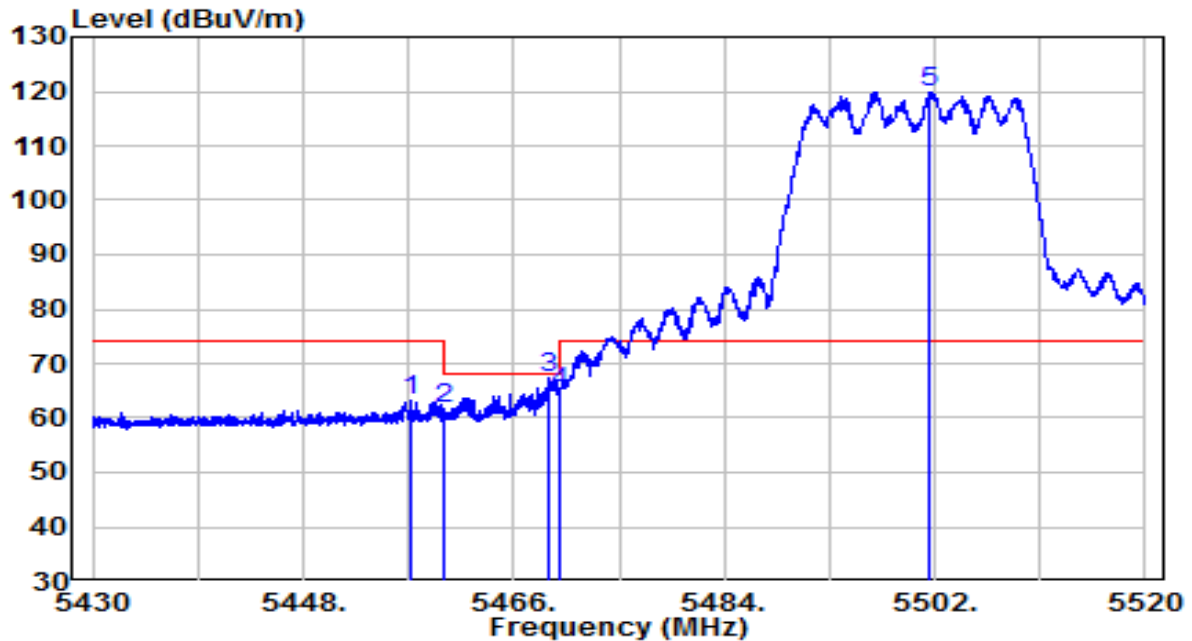


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5457.270	42.41	20.70	63.11	-10.89	74.00	Peak
2	5460.000	41.15	20.70	61.85	-6.35	68.20	Peak
3	5468.925	46.47	20.72	67.19	-1.01	68.20	Peak
4	5470.000	43.88	20.72	64.60	-3.60	68.20	Peak
5	* 5501.640	99.16	20.78	119.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

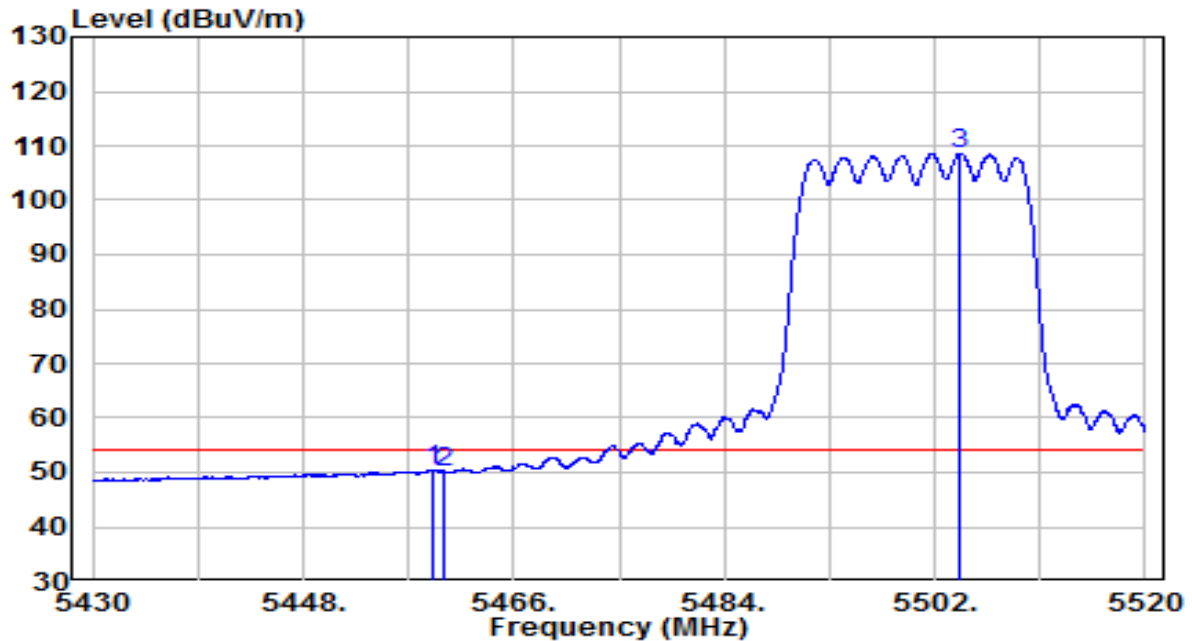


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.070	29.76	20.70	50.46	-3.54	54.00	Average
2	5460.000	29.37	20.70	50.07	-3.93	54.00	Average
3	* 5504.205	87.70	20.79	108.49	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

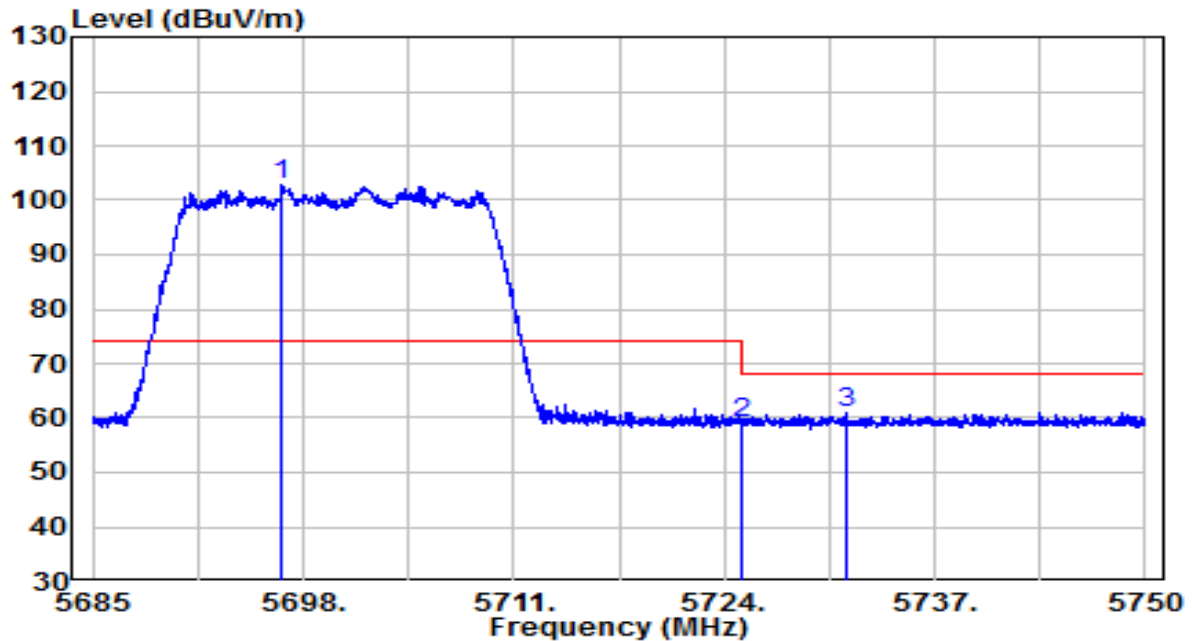


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5696.667	81.21	21.49	102.70	N/A	N/A	Peak
2		5725.000	37.49	21.59	59.08	-9.12	68.20	Peak
3		5731.540	39.19	21.61	60.80	-7.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

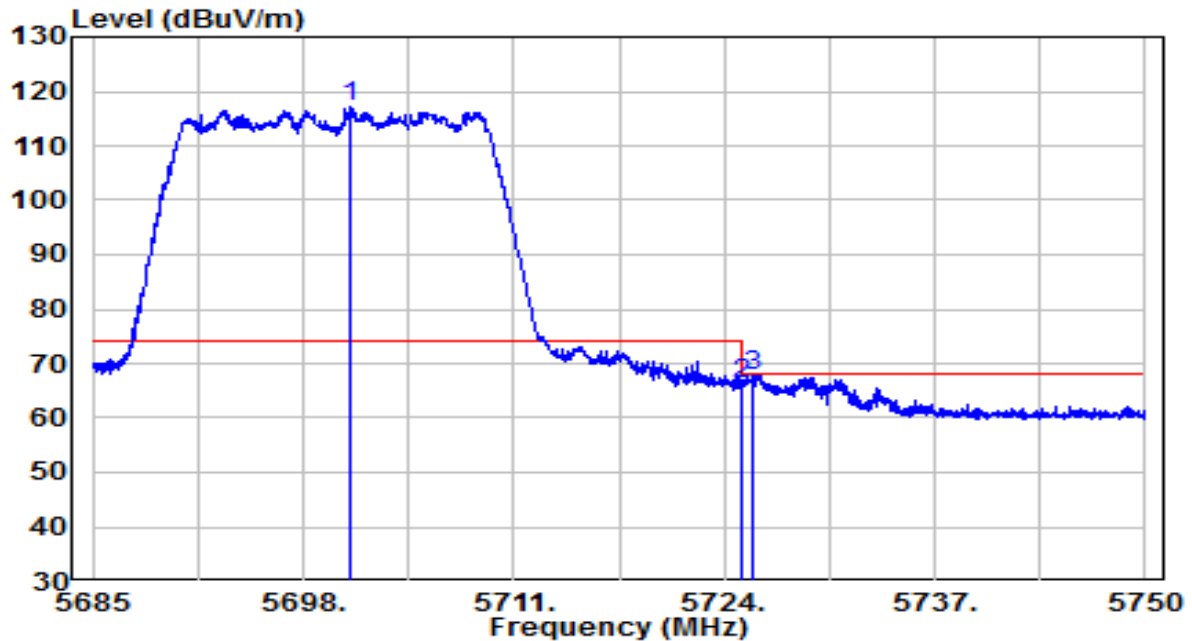


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5700.893	95.74	21.50	117.24	N/A	N/A	Peak
2		5725.000	44.51	21.59	66.10	-2.10	68.20	Peak
3		5725.723	46.23	21.59	67.82	-0.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

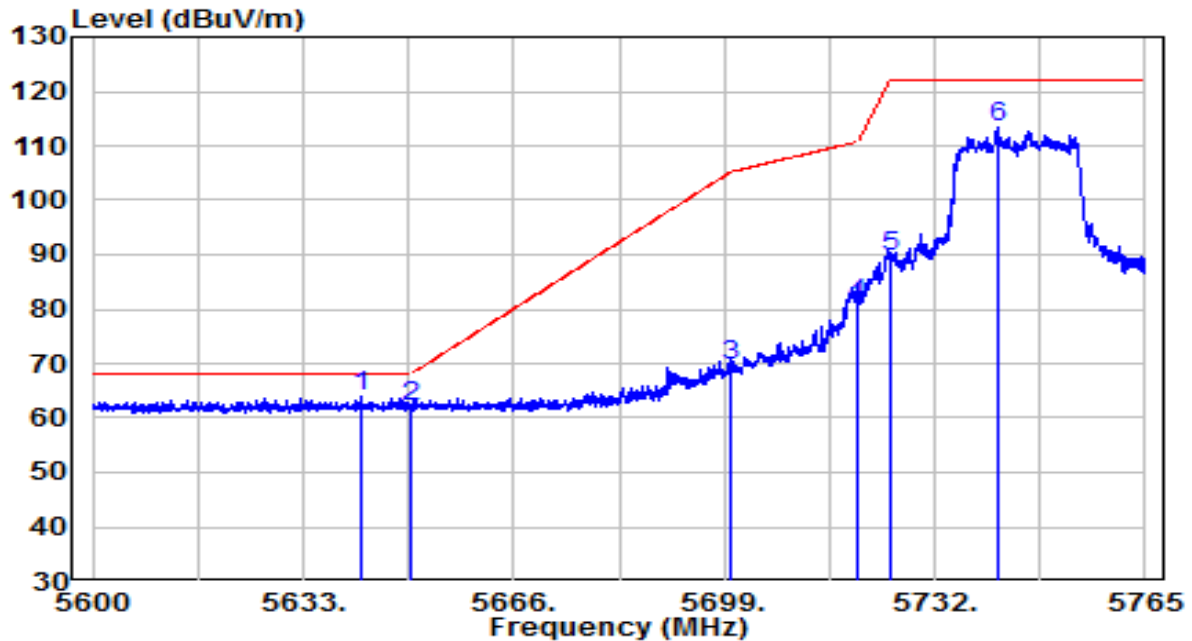


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5641.993	42.63	21.29	63.91	-4.29	68.20	Peak
2		5650.000	40.64	21.32	61.96	-6.24	68.20	Peak
3		5700.000	48.23	21.50	69.72	-35.48	105.20	Peak
4		5720.000	59.51	21.57	81.08	-29.72	110.80	Peak
5		5725.000	68.00	21.59	89.59	-32.61	122.20	Peak
6		5741.817	91.87	21.65	113.52	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

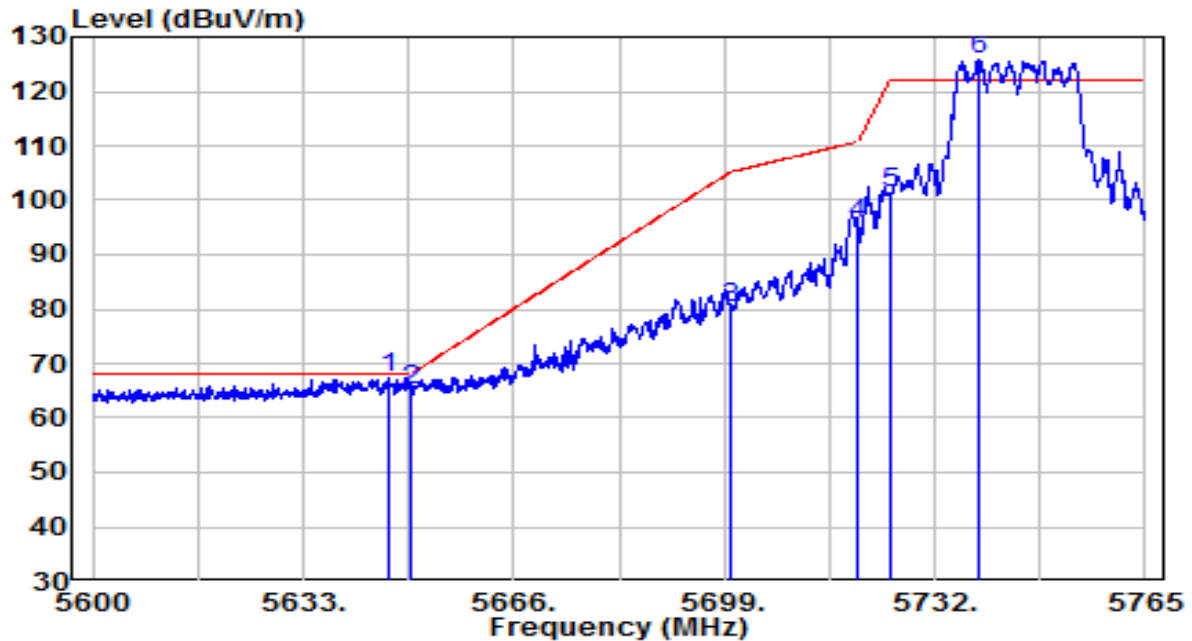


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5646.283	46.22	21.30	67.53	-0.67	68.20	Peak
2	5650.000	43.91	21.32	65.22	-2.98	68.20	Peak
3	5700.000	58.81	21.50	80.31	-24.89	105.20	Peak
4	5720.000	74.06	21.57	95.63	-15.17	110.80	Peak
5	5725.000	79.78	21.59	101.37	-20.83	122.20	Peak
6	* 5739.095	104.25	21.64	125.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

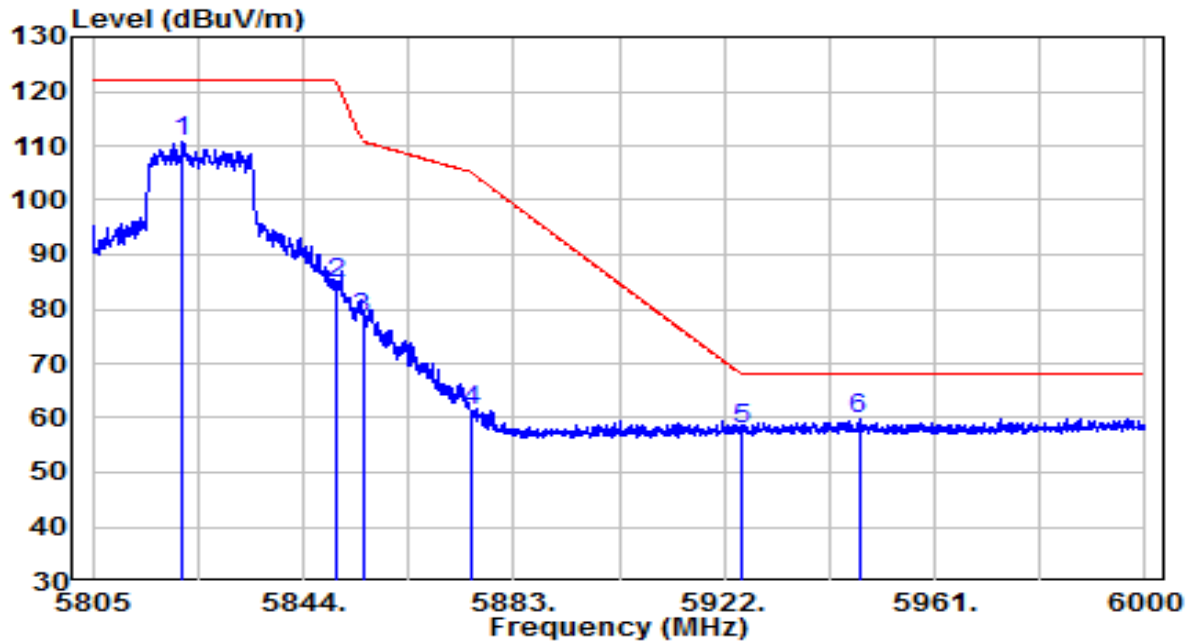


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5821.672	88.66	21.94	110.61	N/A	N/A	Peak
2	5850.000	62.51	22.04	84.55	-37.65	122.20	Peak
3	5855.000	56.39	22.06	78.45	-32.35	110.80	Peak
4	5875.000	39.22	22.14	61.36	-43.84	105.20	Peak
5	5925.000	35.43	22.32	57.74	-10.46	68.20	Peak
6	* 5946.960	37.26	22.40	59.66	-8.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

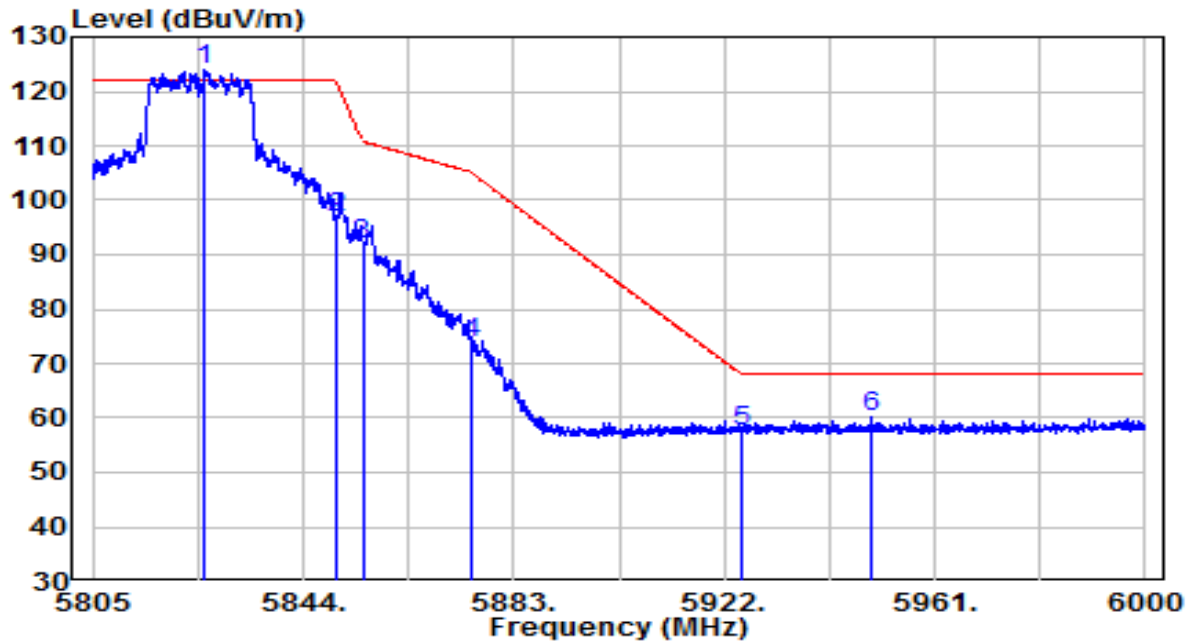


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5825.865	101.94	21.96	123.89	N/A	N/A	Peak
2		5850.000	74.68	22.04	96.73	-25.47	122.20	Peak
3		5855.000	69.82	22.06	91.88	-18.92	110.80	Peak
4		5875.000	51.80	22.14	73.94	-31.26	105.20	Peak
5		5925.000	35.17	22.32	57.49	-10.71	68.20	Peak
6		5949.105	37.73	22.40	60.14	-8.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

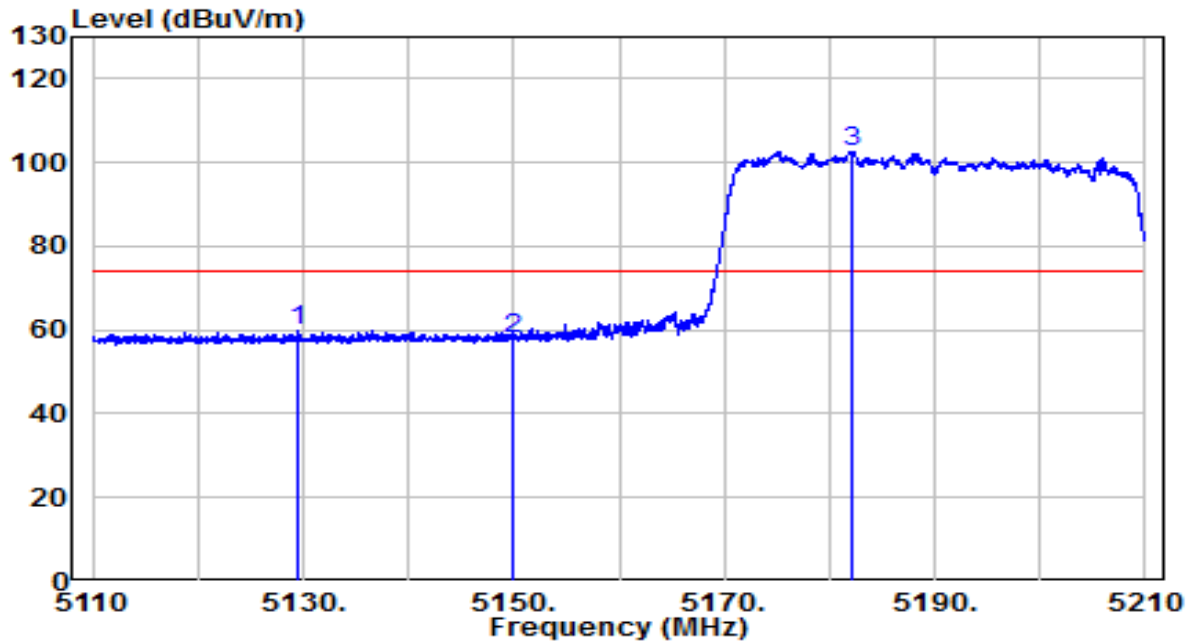


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.600	39.81	20.16	59.97	-14.03	74.00	Peak
2	5150.000	37.87	20.20	58.06	-15.94	74.00	Peak
3	* 5182.050	82.35	20.25	102.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

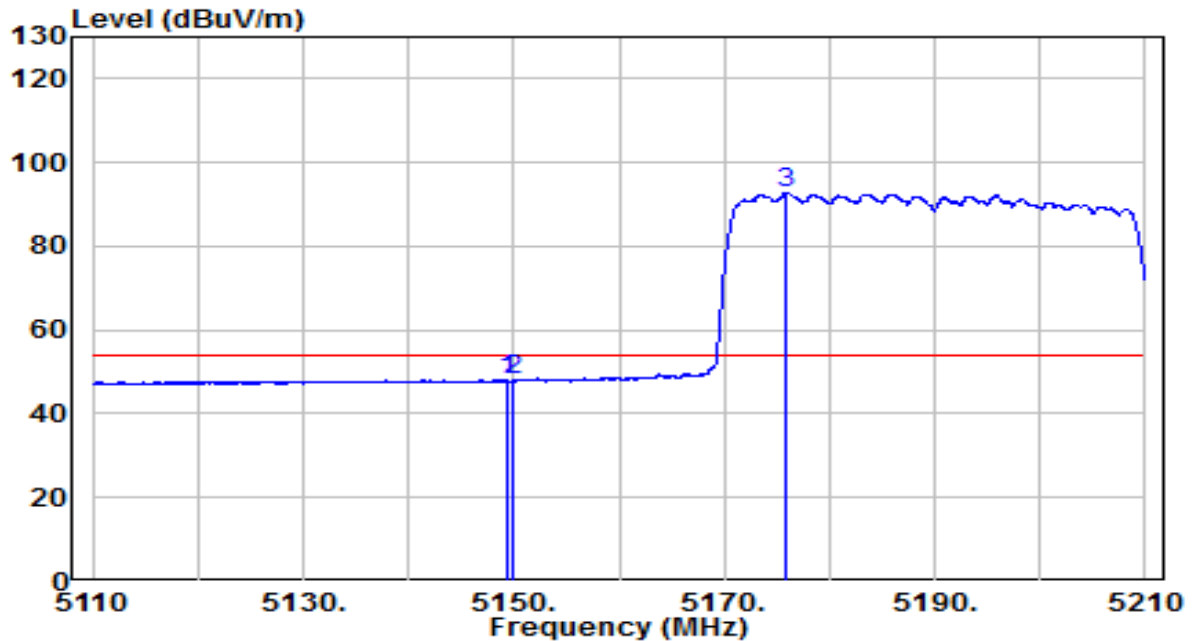


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.300	27.82	20.19	48.01	-5.99	54.00	Average
2	5150.000	27.74	20.20	47.93	-6.07	54.00	Average
3	* 5175.900	72.50	20.24	92.74	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

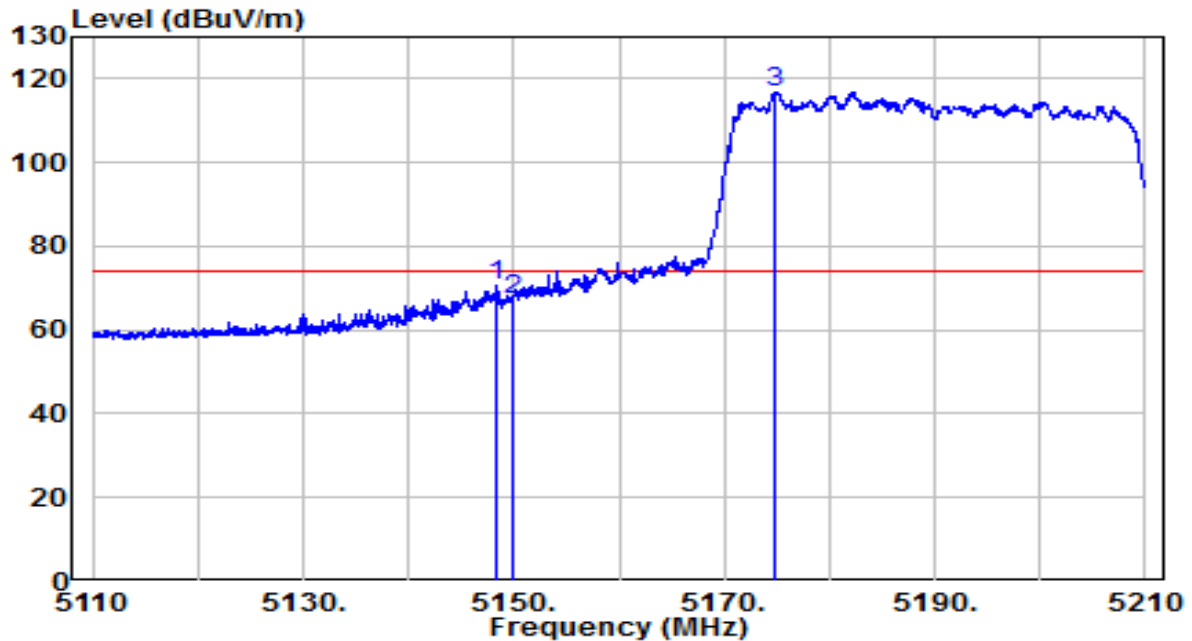


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.350	50.22	20.19	70.41	-3.59	74.00	Peak
2	5150.000	46.97	20.20	67.17	-6.83	74.00	Peak
3	* 5174.900	96.60	20.24	116.84	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

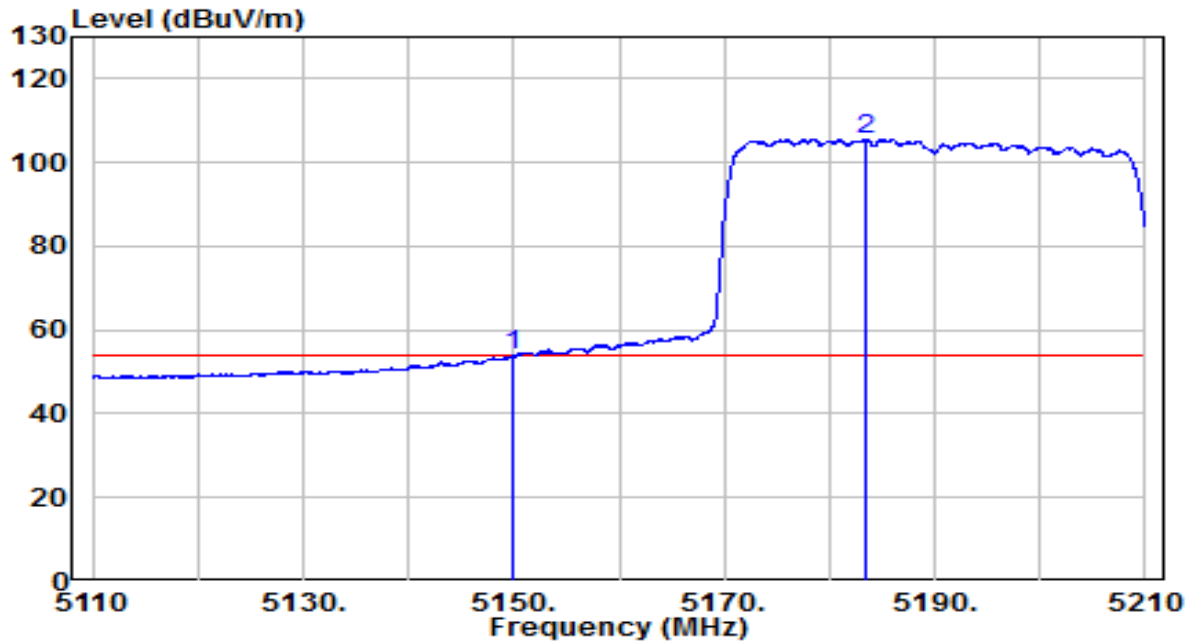


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.59	20.20	53.79	-0.21	54.00	Average
2	* 5183.450	85.27	20.25	105.52	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

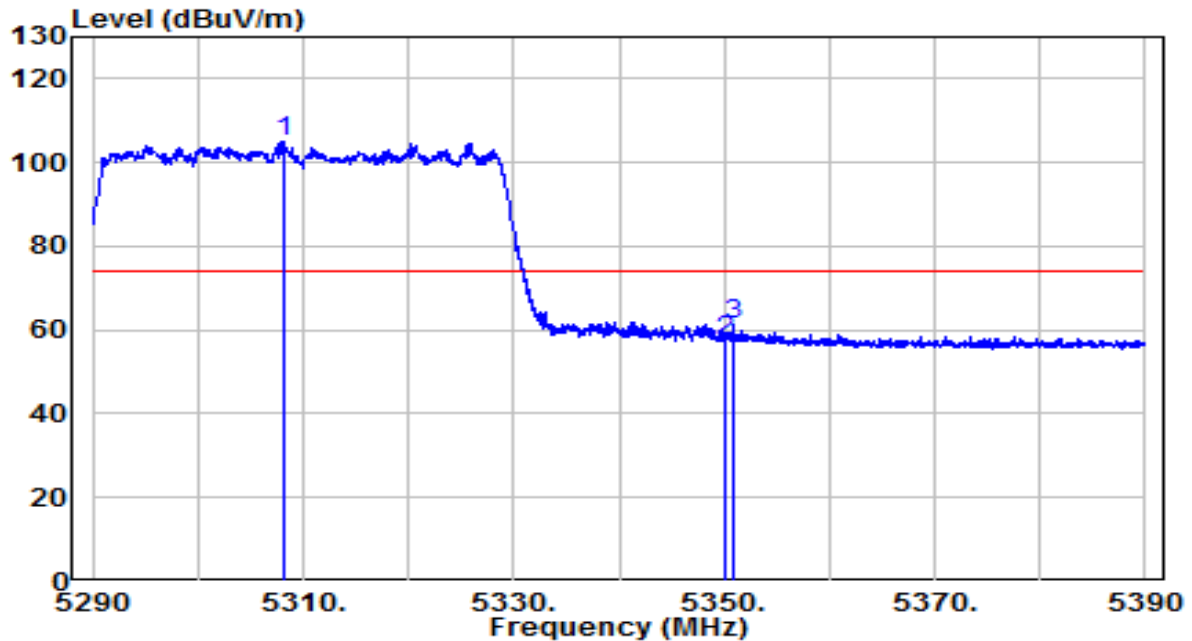


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5308.150	84.65	20.46	105.10	N/A	N/A	Peak
2		5350.000	37.04	20.52	57.57	-16.43	74.00	Peak
3		5350.900	40.73	20.53	61.26	-12.74	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

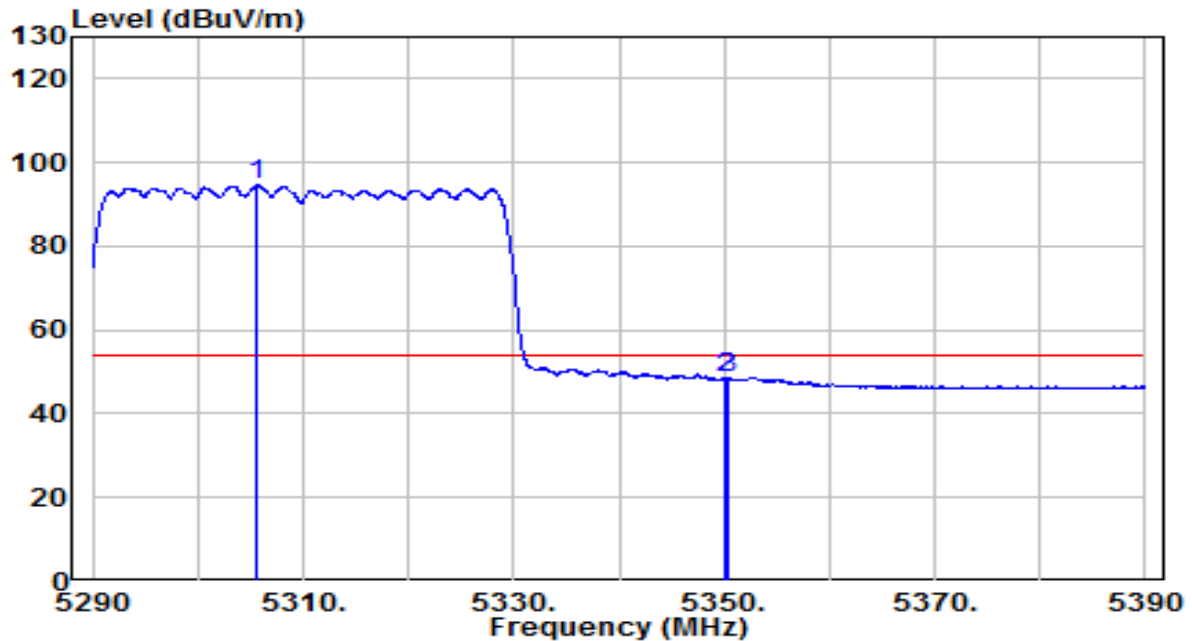


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5305.650	74.08	20.45	94.53	N/A	N/A	Average
2		5350.000	28.01	20.52	48.53	-5.47	54.00	Average
3		5350.450	28.05	20.52	48.58	-5.42	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

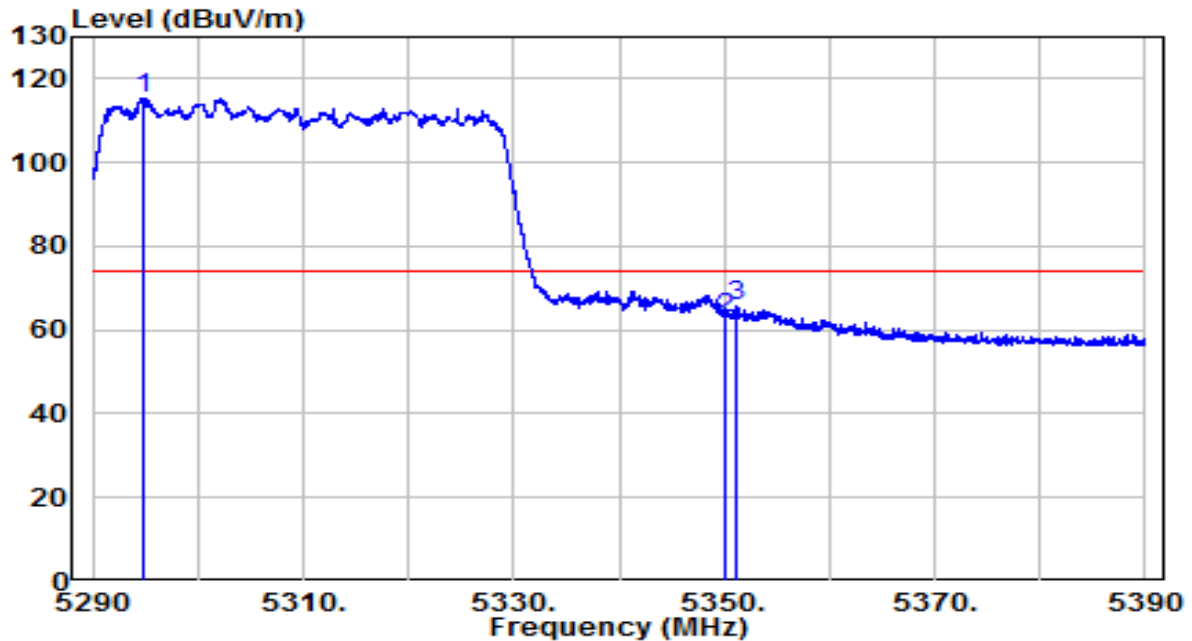


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5294.900	94.79	20.43	115.22	N/A	N/A	Peak
2		5350.000	42.27	20.52	62.80	-11.20	74.00	Peak
3		5351.100	45.30	20.53	65.83	-8.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

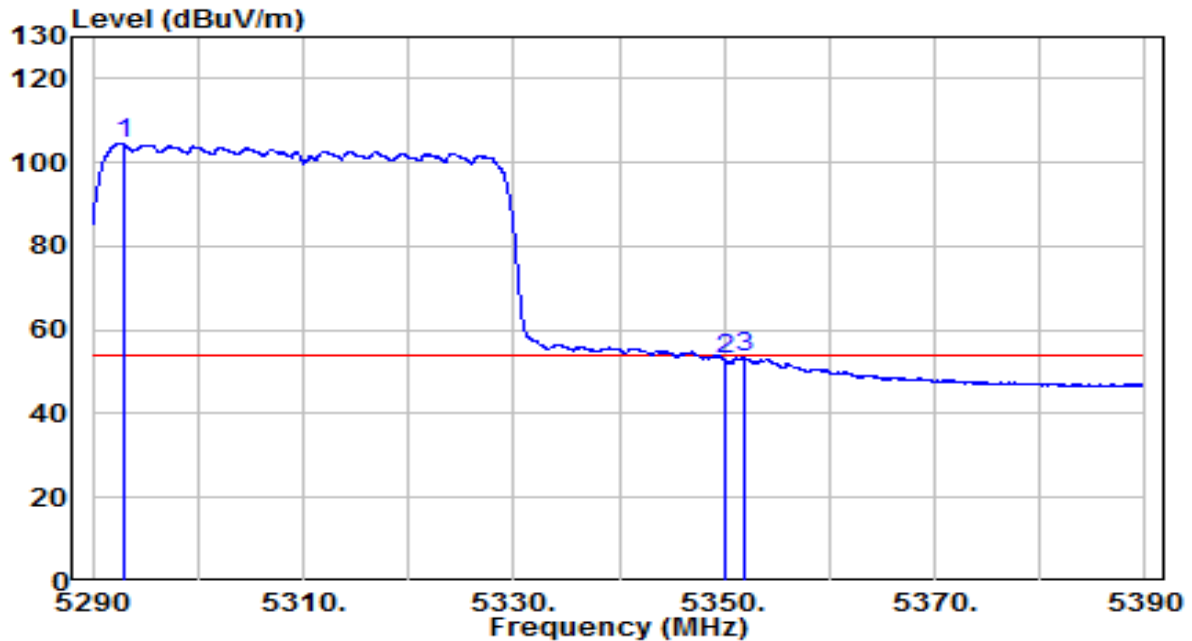


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5292.950	83.97	20.43	104.40	N/A	N/A	Average
2		5350.000	32.24	20.52	52.77	-1.23	54.00	Average
3		5351.800	32.89	20.53	53.41	-0.59	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

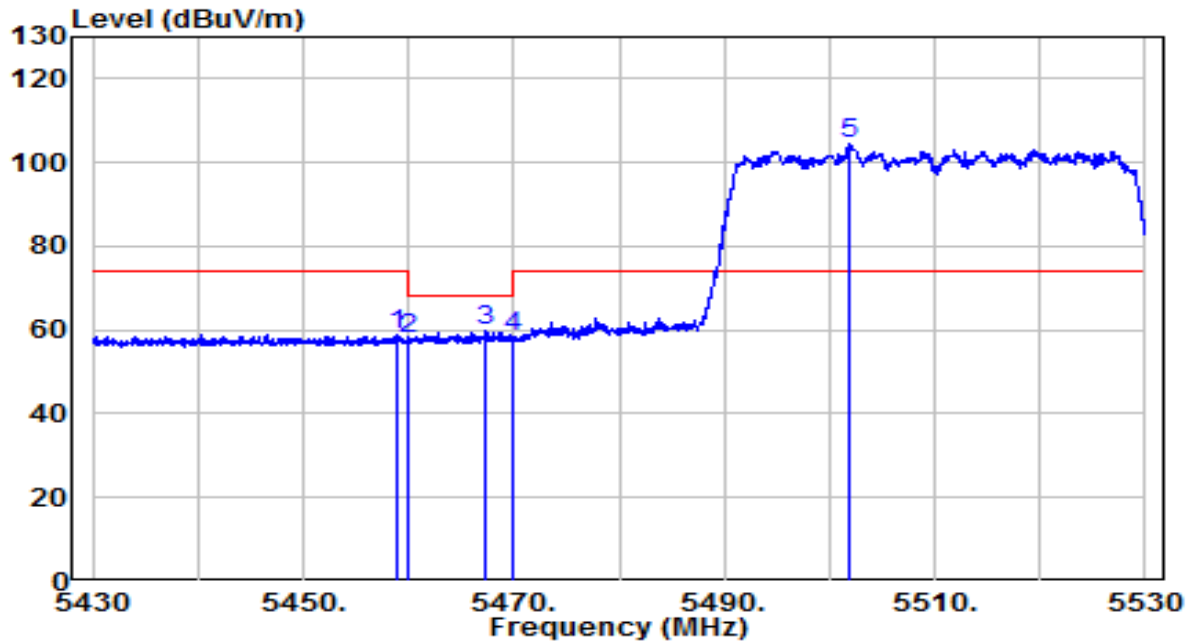


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.000	38.27	20.70	58.98	-15.02	74.00	Peak
2	5460.000	37.25	20.70	57.96	-10.24	68.20	Peak
3	5467.250	38.89	20.72	59.61	-8.59	68.20	Peak
4	5470.000	37.44	20.72	58.16	-10.04	68.20	Peak
5	* 5501.950	83.89	20.78	104.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

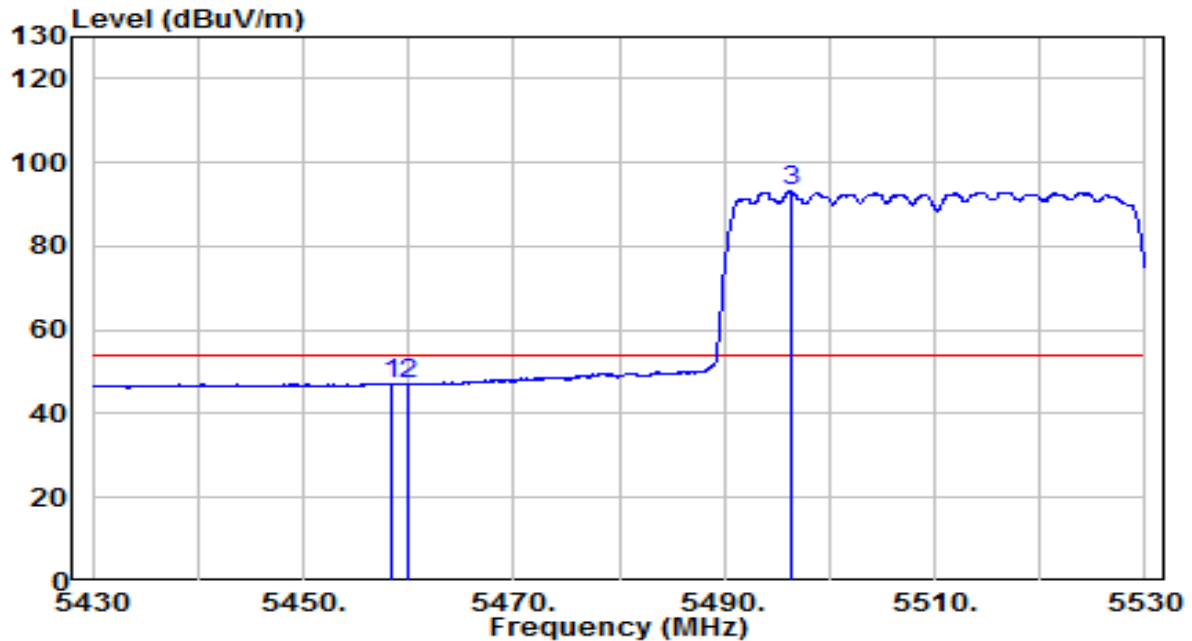


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.450	26.56	20.70	47.26	-6.74	54.00	Average
2	5460.000	26.37	20.70	47.08	-6.92	54.00	Average
3	* 5496.300	72.30	20.76	93.07	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

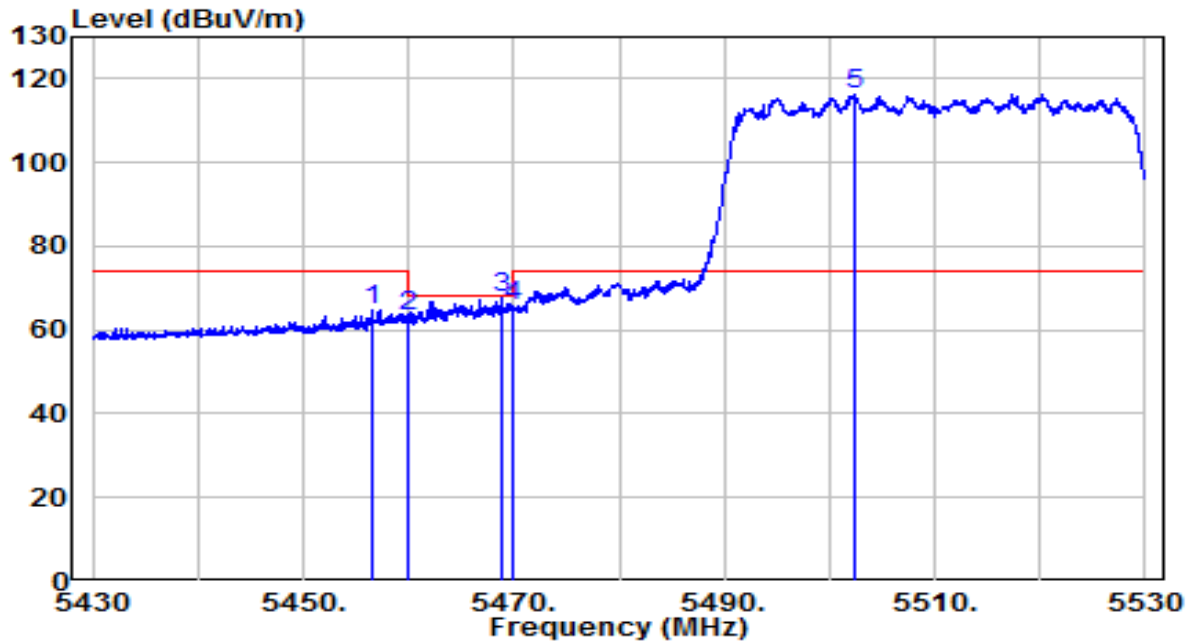


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.550	44.29	20.70	64.99	-9.01	74.00	Peak
2	5460.000	42.62	20.70	63.33	-4.87	68.20	Peak
3	5468.750	47.18	20.72	67.90	-0.30	68.20	Peak
4	5470.000	45.00	20.72	65.72	-2.48	68.20	Peak
5	* 5502.350	95.53	20.78	116.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

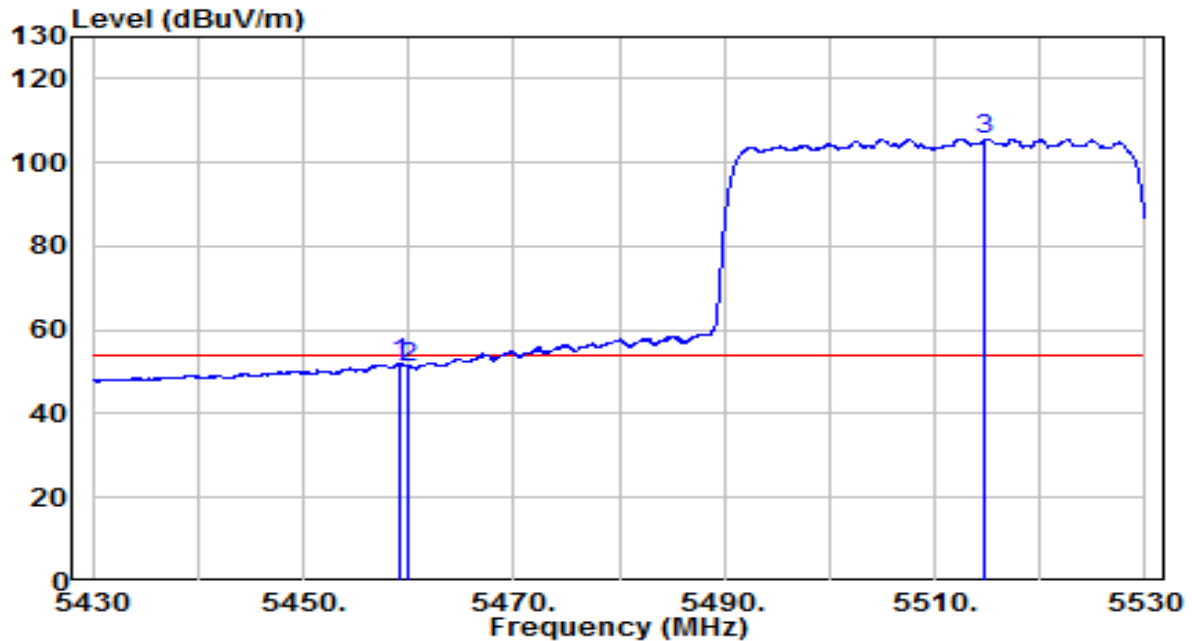


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.100	31.33	20.70	52.04	-1.96	54.00	Average
2	5460.000	30.56	20.70	51.26	-2.74	54.00	Average
3	* 5514.800	84.83	20.82	105.66	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

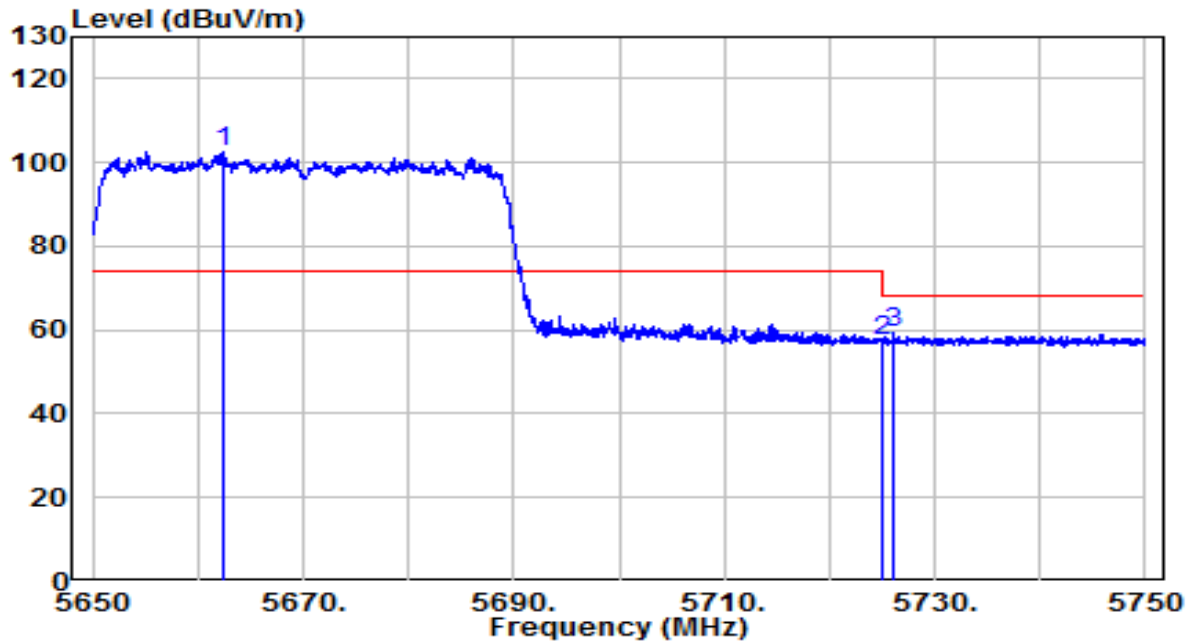


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.300	81.28	21.36	102.64	N/A	N/A	Peak
2		5725.000	35.57	21.59	57.15	-11.05	68.20	Peak
3		5726.100	37.66	21.59	59.26	-8.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

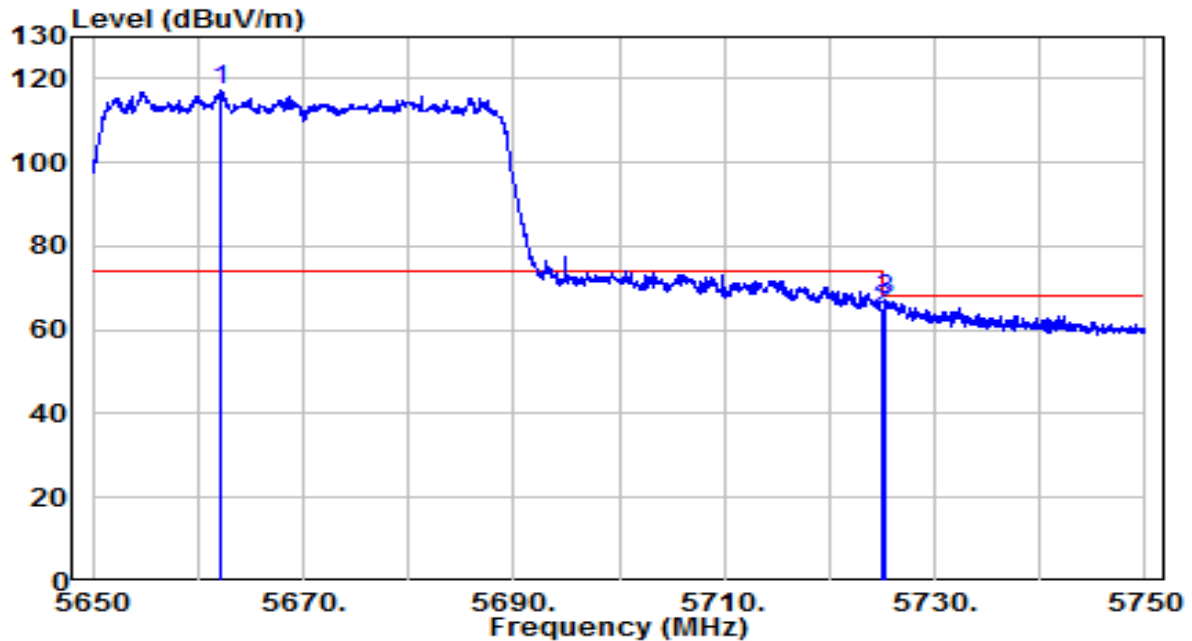


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.150	95.79	21.36	117.15	N/A	N/A	Peak
2		5725.000	43.39	21.59	64.98	-3.22	68.20	Peak
3		5725.200	45.70	21.59	67.29	-0.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

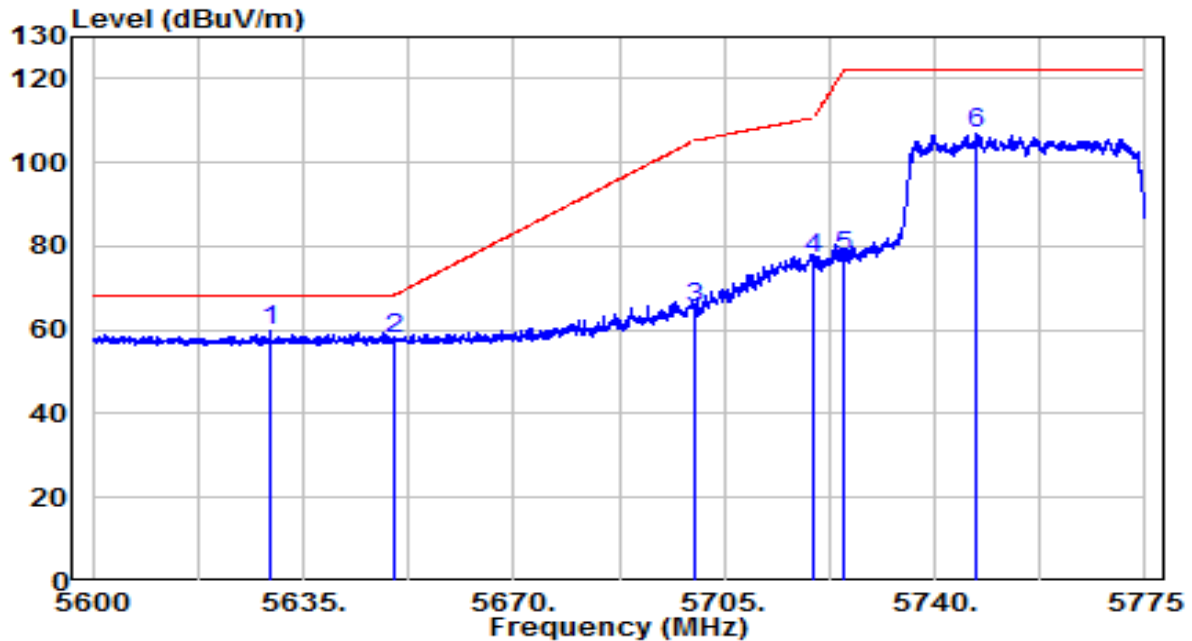


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5629.575	38.47	21.24	59.71	-8.49	68.20	Peak
2		5650.000	36.37	21.32	57.68	-10.52	68.20	Peak
3		5700.000	43.72	21.50	65.22	-39.98	105.20	Peak
4		5720.000	55.27	21.57	76.84	-33.96	110.80	Peak
5		5725.000	55.99	21.59	77.58	-44.62	122.20	Peak
6		5746.913	85.46	21.67	107.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

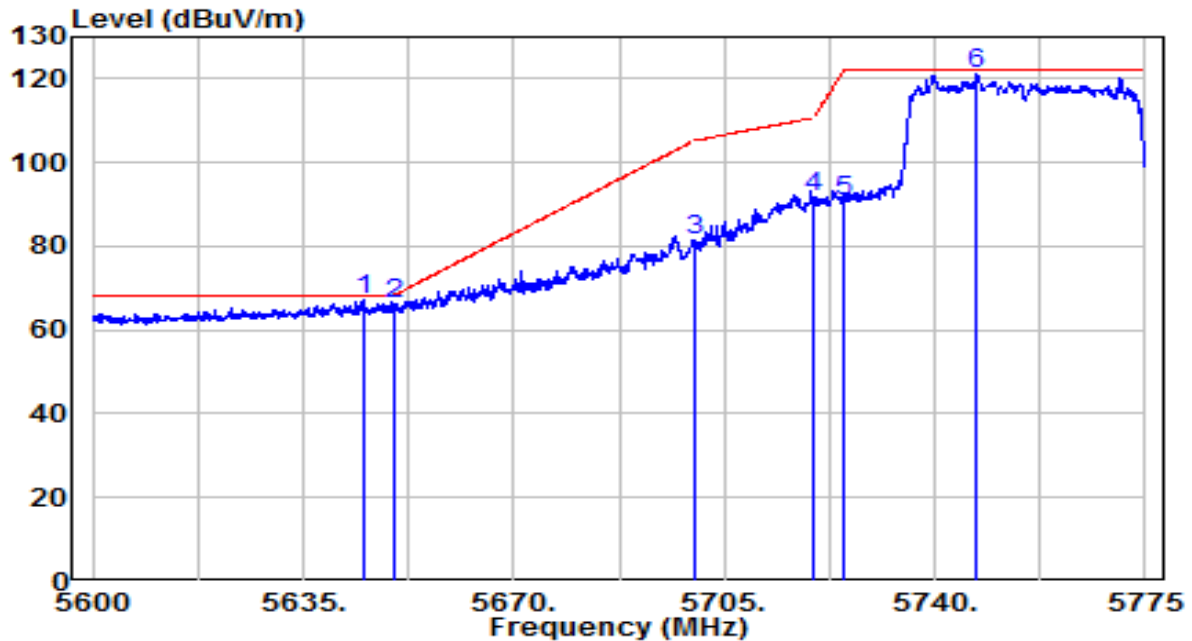


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5645.063	46.12	21.30	67.42	-0.78	68.20	Peak
2		5649.962	44.86	21.32	66.17	-2.03	68.20	Peak
3		5700.000	59.71	21.50	81.21	-23.99	105.20	Peak
4		5720.000	70.16	21.57	91.73	-19.07	110.80	Peak
5		5725.000	69.24	21.59	90.83	-31.37	122.20	Peak
6		5747.087	99.32	21.67	120.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

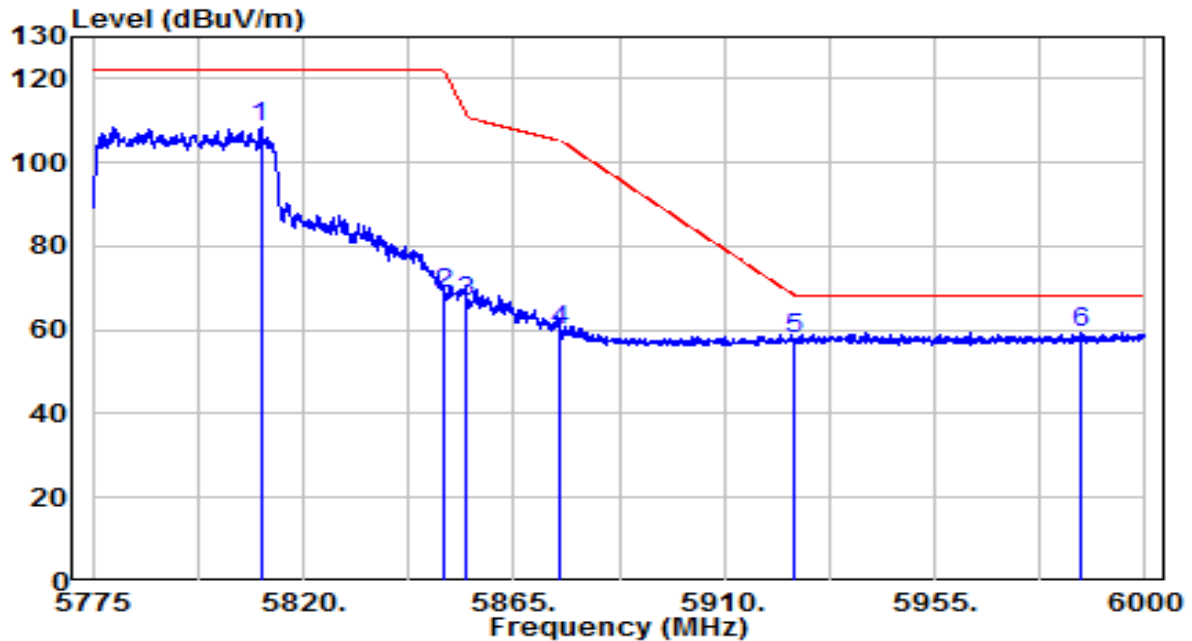


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5810.888	86.51	21.90	108.41	N/A	N/A	Peak
2	5850.000	46.40	22.04	68.45	-53.75	122.20	Peak
3	5855.000	44.81	22.06	66.88	-43.92	110.80	Peak
4	5875.000	37.88	22.14	60.01	-45.19	105.20	Peak
5	5925.000	35.51	22.32	57.82	-10.38	68.20	Peak
6	* 5986.388	37.00	22.54	59.54	-8.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

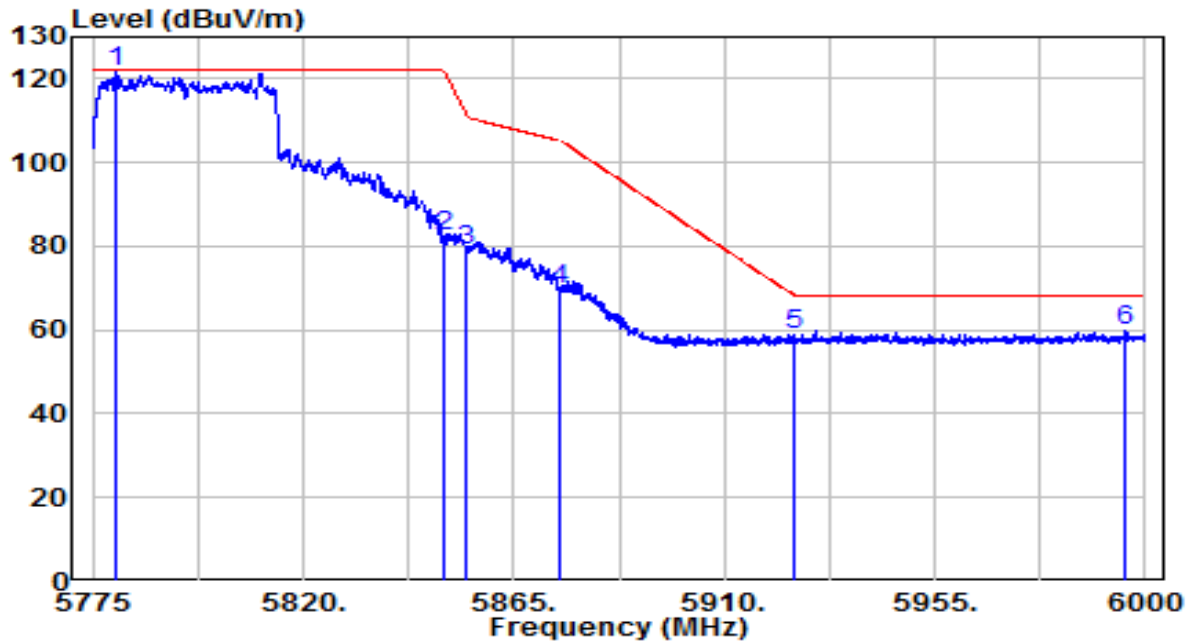


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5780.063	99.66	21.79	121.45	N/A	N/A	Peak
2		5850.000	60.26	22.04	82.30	-39.90	122.20	Peak
3		5855.000	56.82	22.06	78.88	-31.92	110.80	Peak
4		5875.000	47.45	22.14	69.59	-35.61	105.20	Peak
5		5925.000	36.53	22.32	58.84	-9.36	68.20	Peak
6		5995.950	37.27	22.58	59.85	-8.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

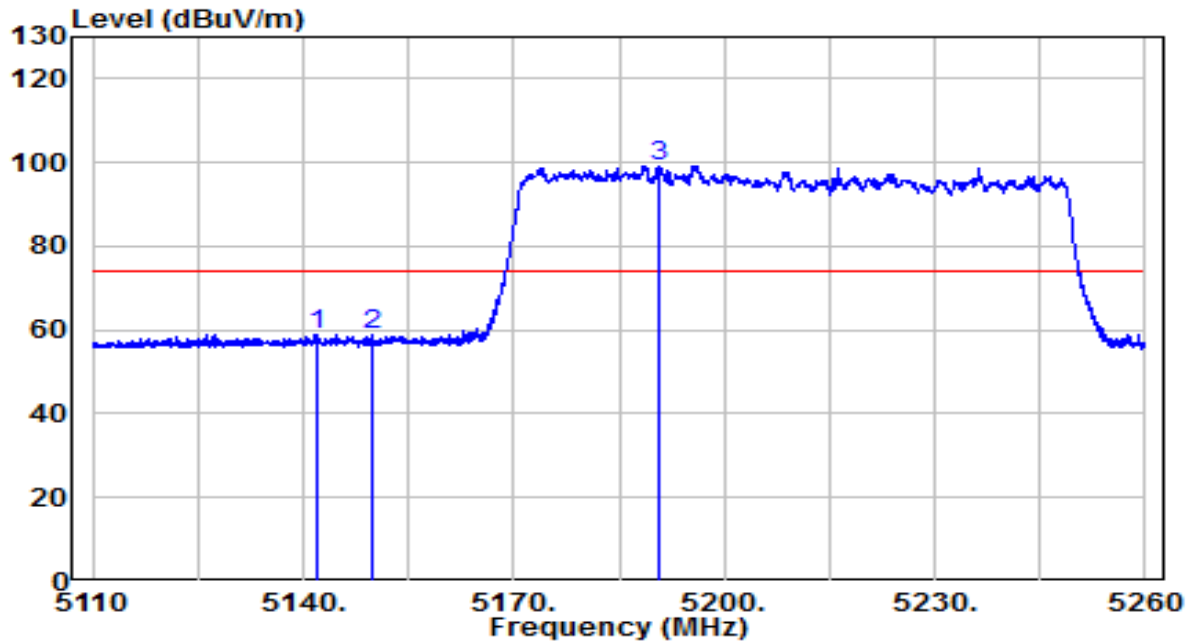


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.950	38.80	20.18	58.98	-15.02	74.00	Peak
2	5150.000	38.65	20.20	58.85	-15.15	74.00	Peak
3	* 5190.775	79.03	20.26	99.29	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

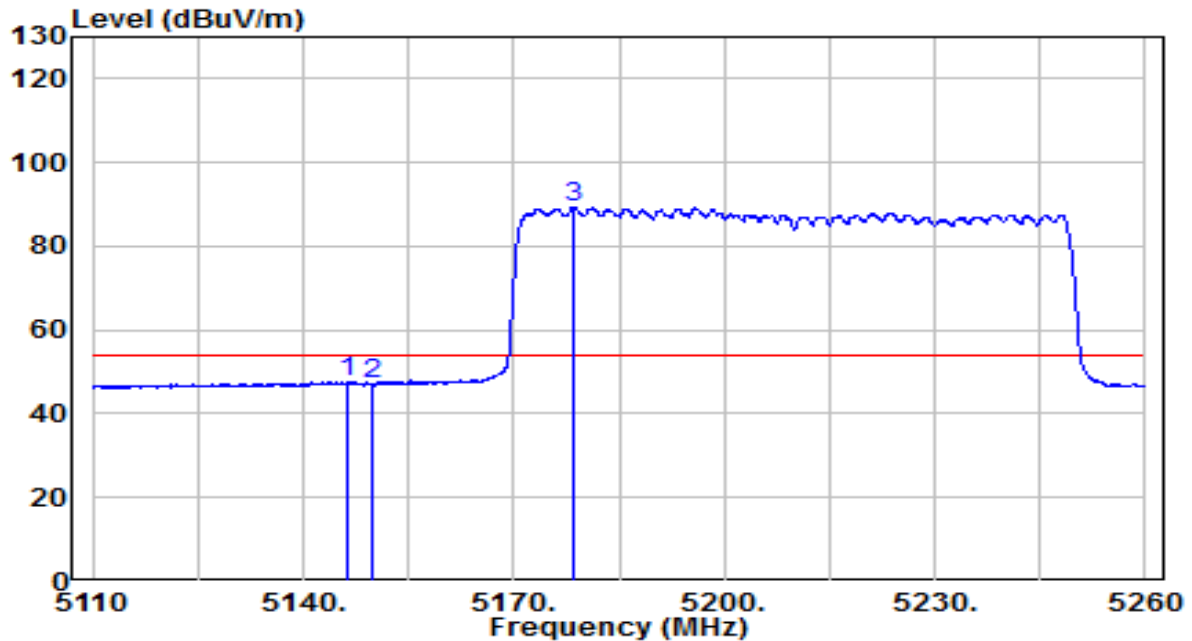


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.225	27.34	20.19	47.53	-6.47	54.00	Average
2	5150.000	26.71	20.20	46.91	-7.09	54.00	Average
3	* 5178.475	69.15	20.24	89.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

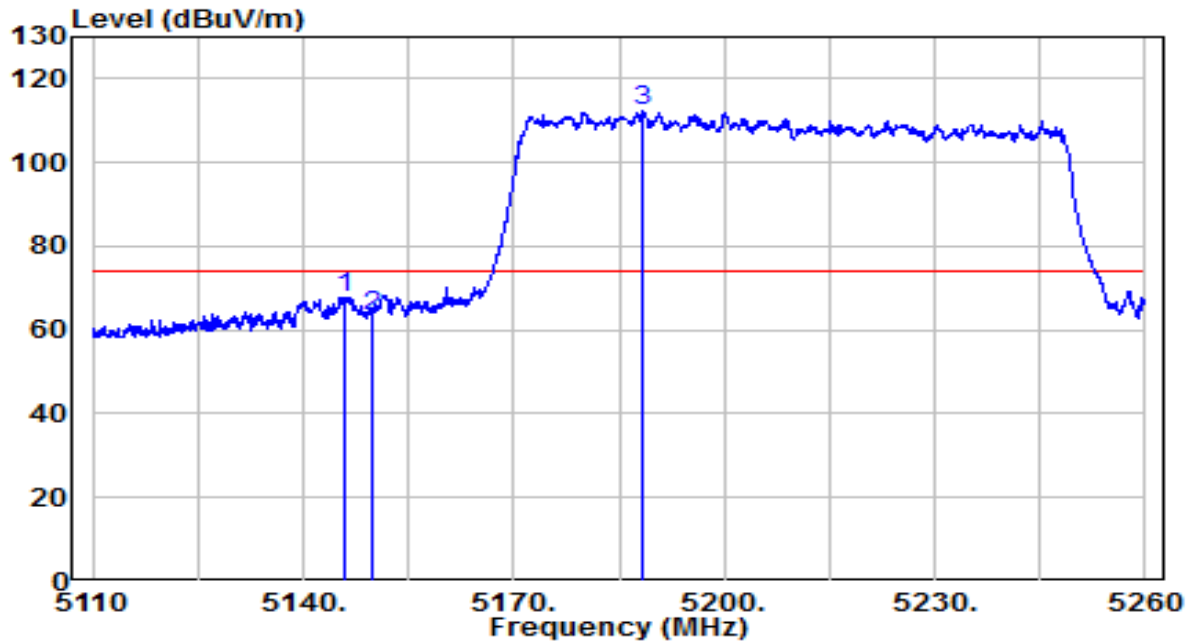


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.925	47.73	20.19	67.92	-6.08	74.00	Peak
2	5150.000	43.27	20.20	63.47	-10.53	74.00	Peak
3	* 5188.525	91.97	20.26	112.23	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

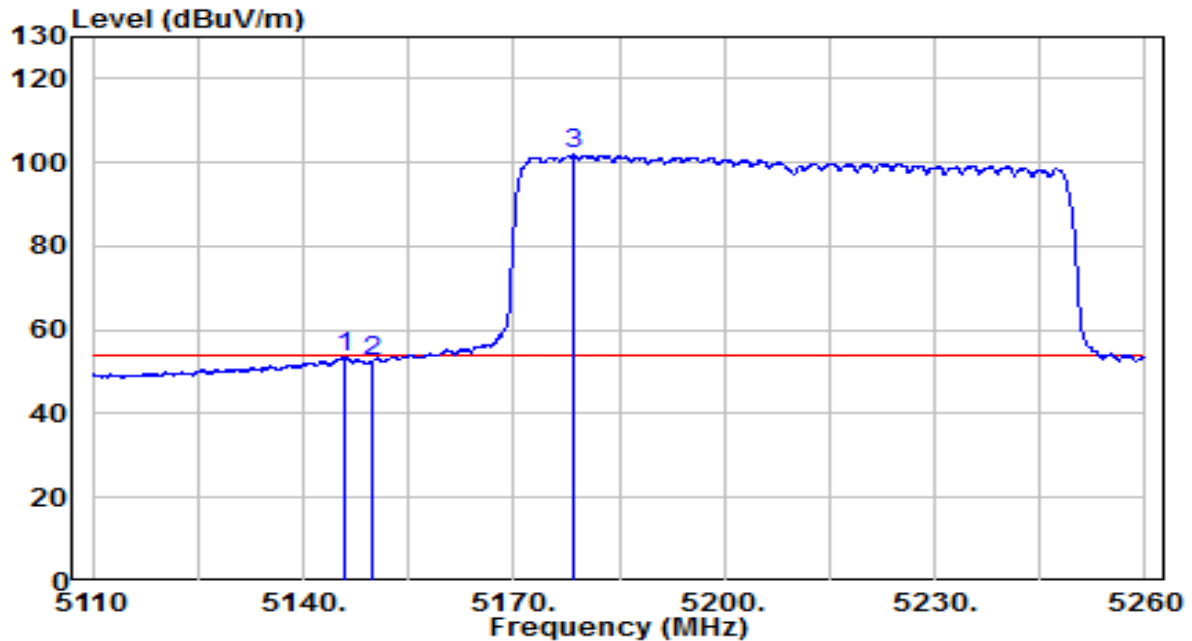


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.850	33.38	20.19	53.57	-0.43	54.00	Average
2	5150.000	32.47	20.20	52.66	-1.34	54.00	Average
3	* 5178.400	81.60	20.24	101.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

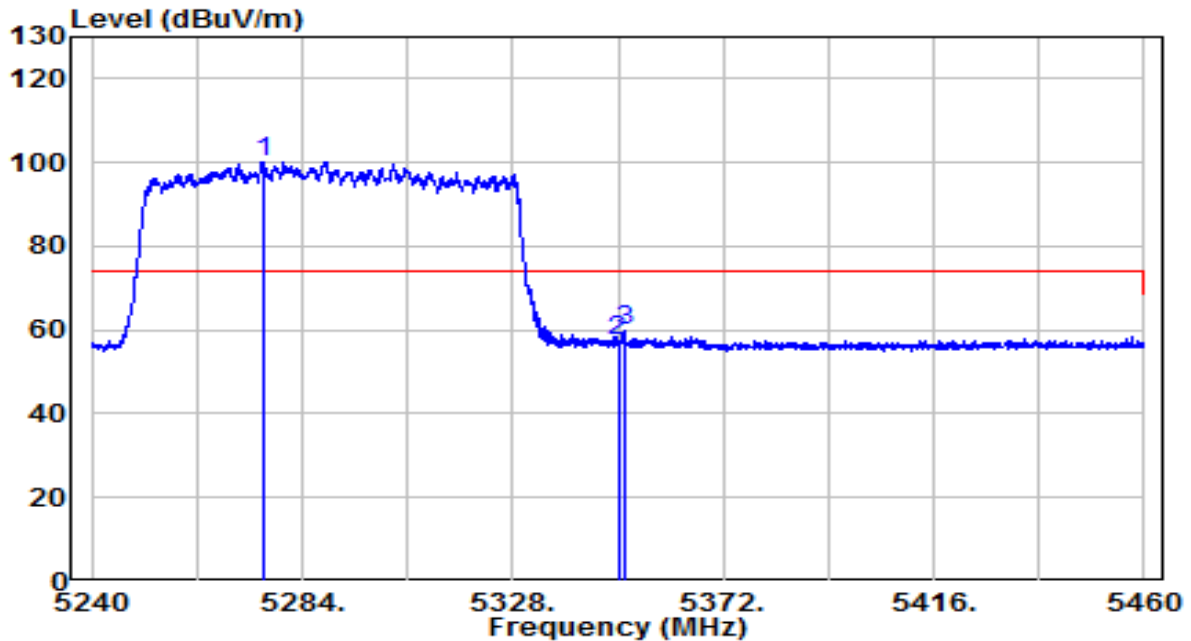


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5275.750	79.88	20.40	100.29	N/A	N/A	Peak
2		5350.000	37.01	20.52	57.54	-16.46	74.00	Peak
3		5351.210	39.39	20.53	59.92	-14.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

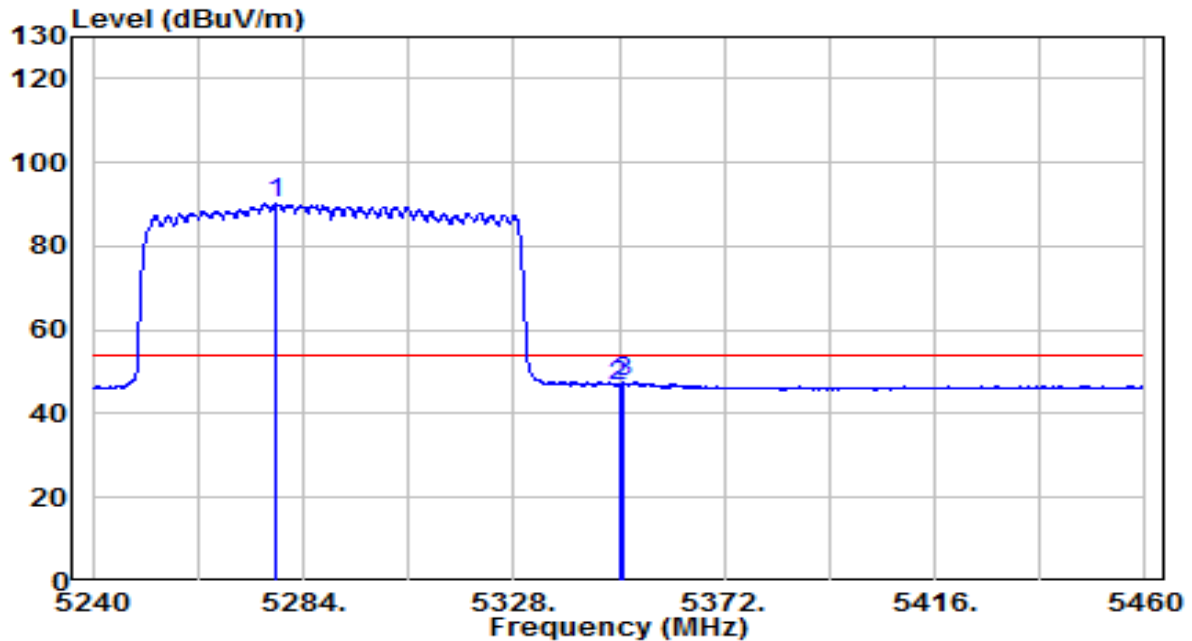


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5278.170	69.86	20.41	90.27	N/A	N/A	Average
2		5350.000	26.22	20.52	46.74	-7.26	54.00	Average
3		5351.100	27.13	20.53	47.66	-6.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

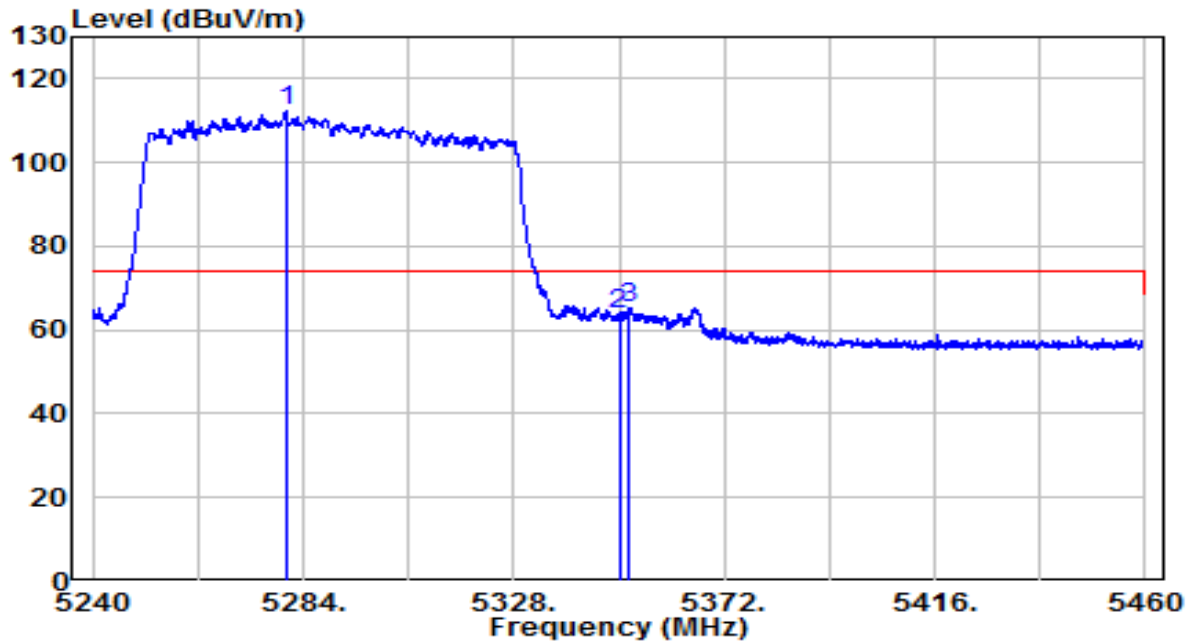


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5280.370	91.85	20.41	112.26	N/A	N/A	Peak
2		5350.000	43.02	20.52	63.54	-10.46	74.00	Peak
3		5352.090	44.86	20.53	65.39	-8.61	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

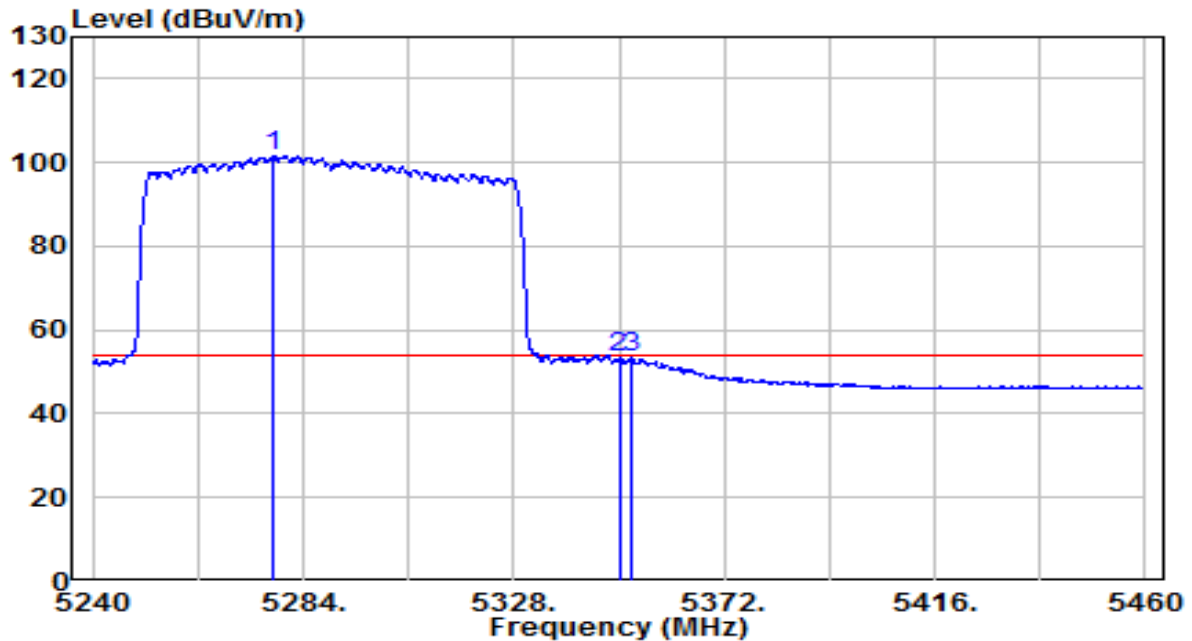


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5277.840	81.18	20.41	101.59	N/A	N/A	Average
2		5350.000	32.72	20.52	53.25	-0.75	54.00	Average
3		5352.530	33.01	20.53	53.54	-0.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

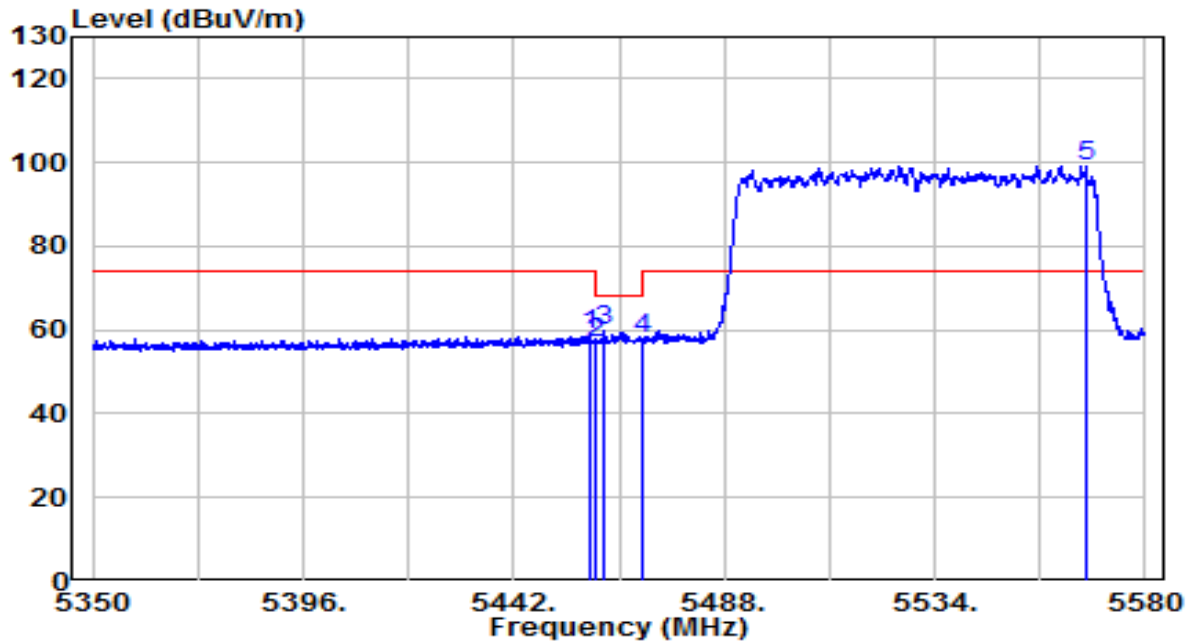


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.790	38.34	20.70	59.04	-14.96	74.00	Peak
2	5460.000	36.16	20.70	56.86	-11.34	68.20	Peak
3	5461.895	38.96	20.71	59.66	-8.54	68.20	Peak
4	5470.000	37.09	20.72	57.81	-10.39	68.20	Peak
5	* 5567.005	78.29	21.01	99.30	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

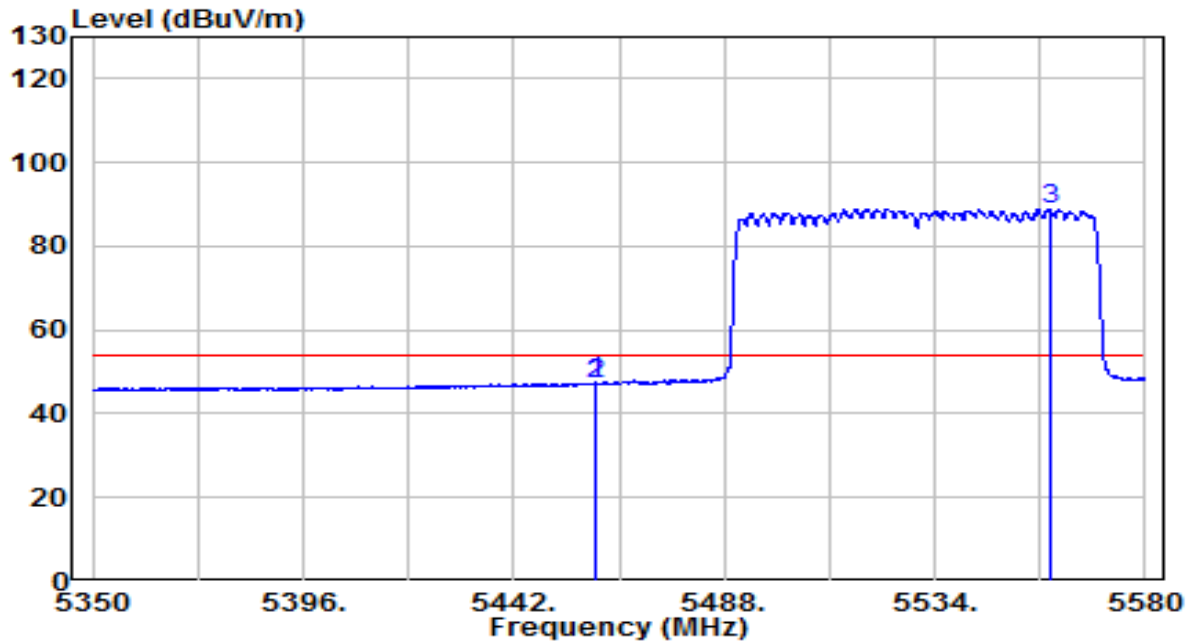


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.710	26.74	20.70	47.44	-6.56	54.00	Average
2	5460.055	26.32	20.70	47.03	-6.97	54.00	Average
3	* 5559.185	67.84	20.99	88.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

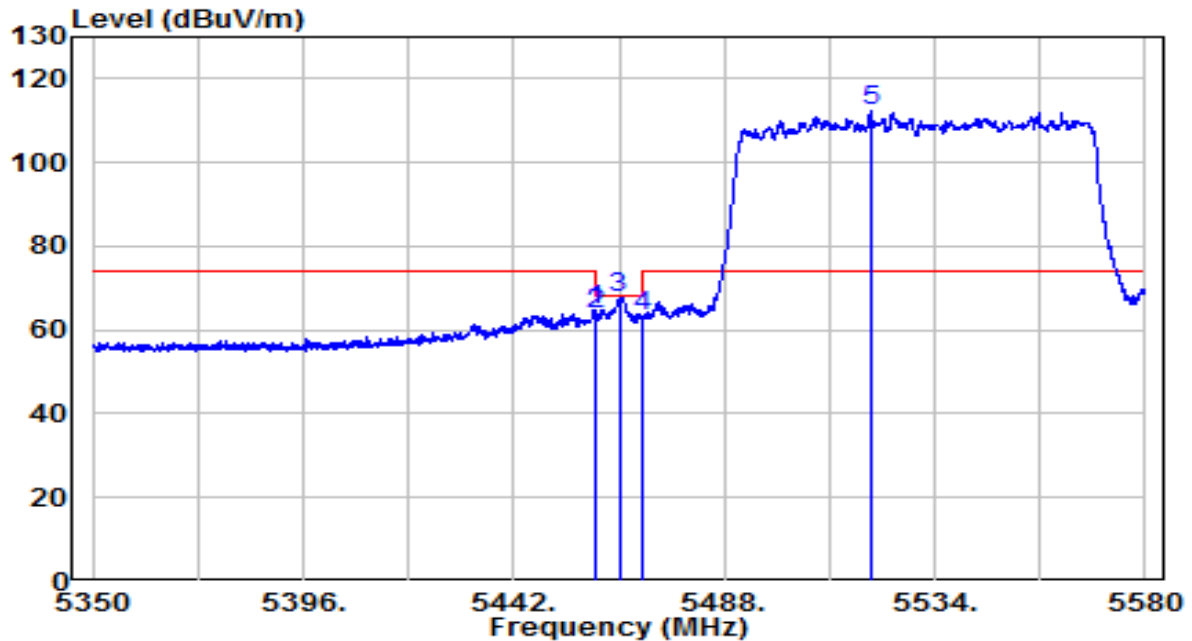


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.940	44.02	20.70	64.72	-9.28	74.00	Peak
2	5460.000	42.96	20.70	63.66	-4.54	68.20	Peak
3	5465.000	47.18	20.71	67.89	-0.31	68.20	Peak
4	5470.000	42.79	20.72	63.51	-4.69	68.20	Peak
5	* 5520.085	91.32	20.84	112.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

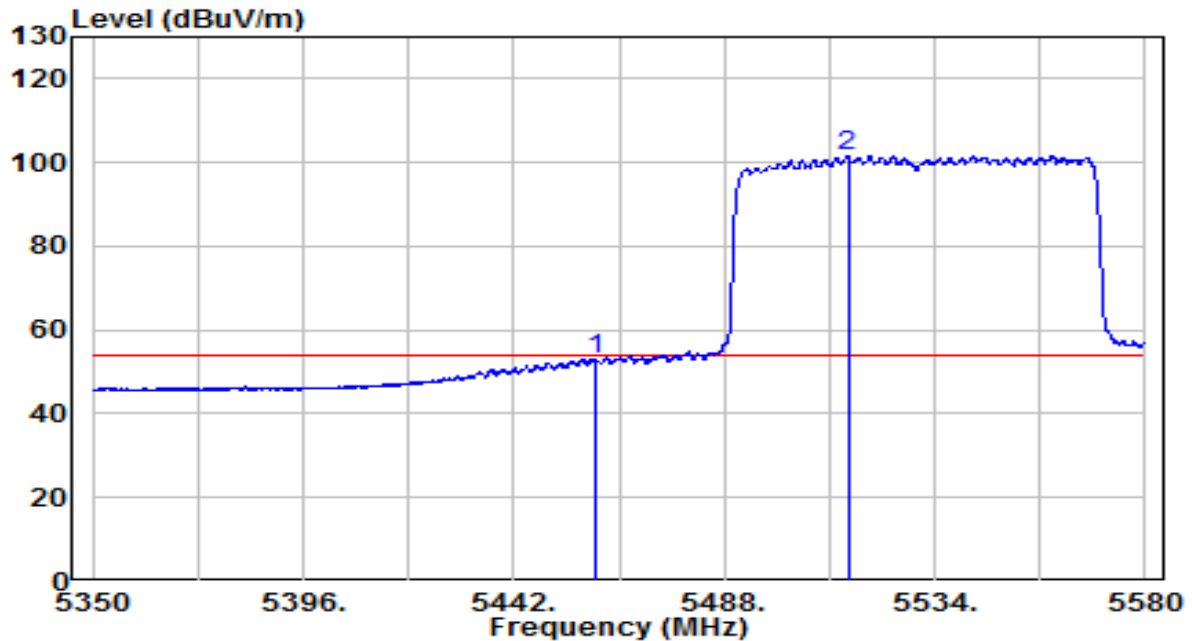


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	32.14	20.70	52.84	-1.16	54.00	Average
2	* 5515.025	80.85	20.82	101.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

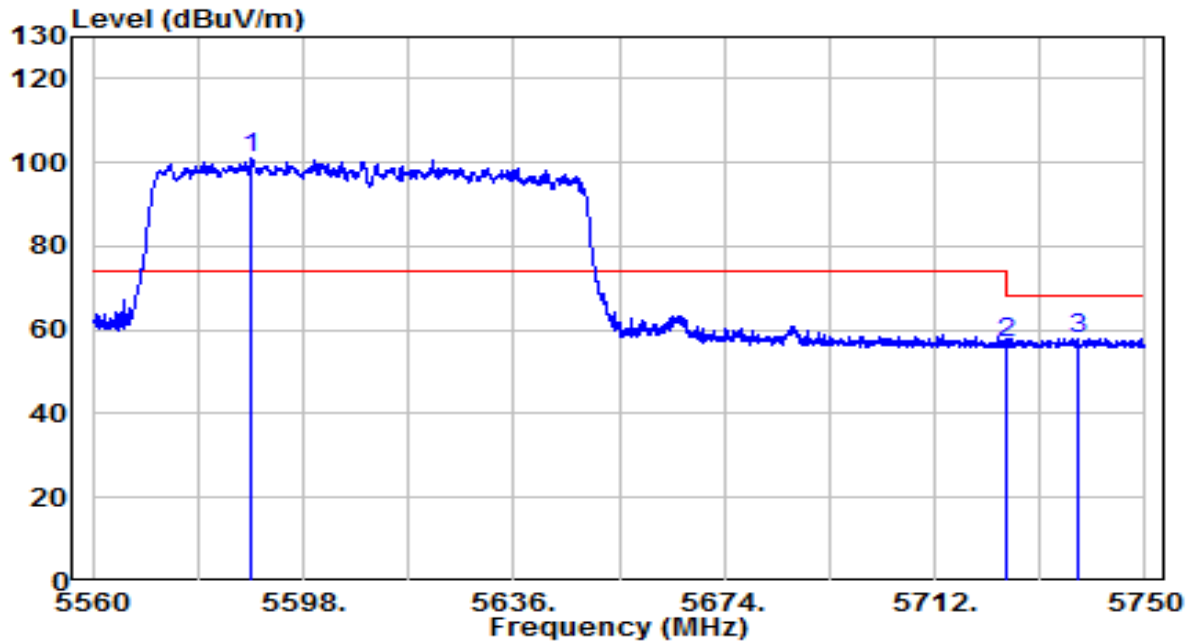


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5588.595	79.79	21.09	100.89	N/A	N/A	Peak
2		5725.000	35.16	21.59	56.75	-11.45	68.20	Peak
3		5737.650	36.38	21.64	58.02	-10.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

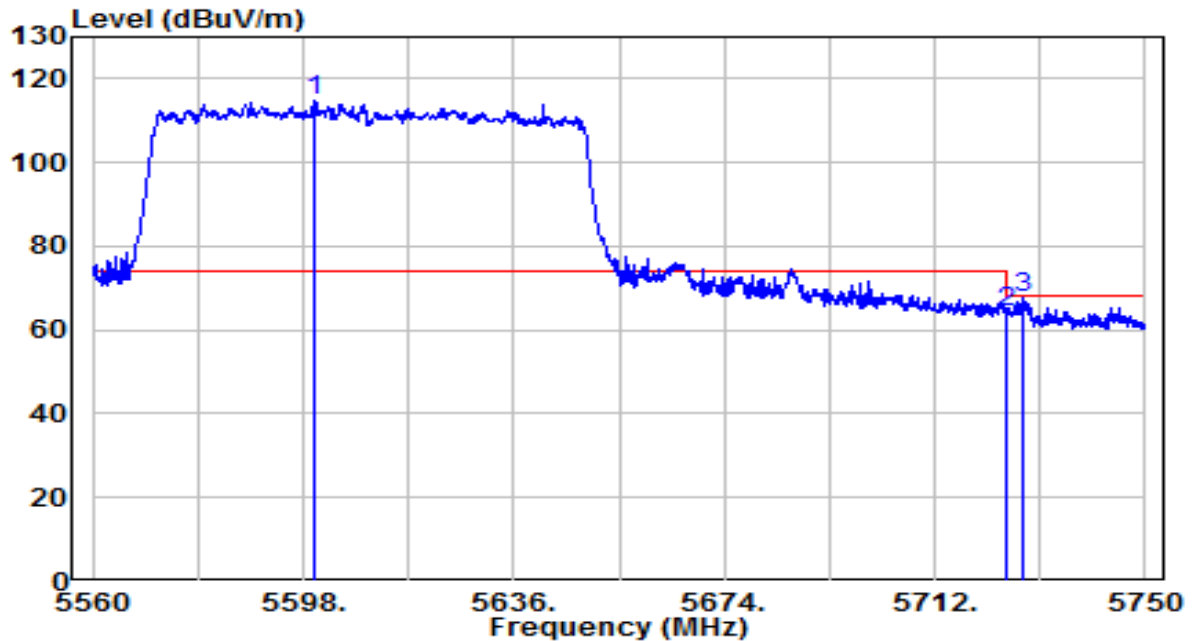


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5599.995	93.65	21.13	114.78	N/A	N/A	Peak
2		5725.000	42.65	21.59	64.24	-3.96	68.20	Peak
3		5728.150	46.04	21.60	67.64	-0.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

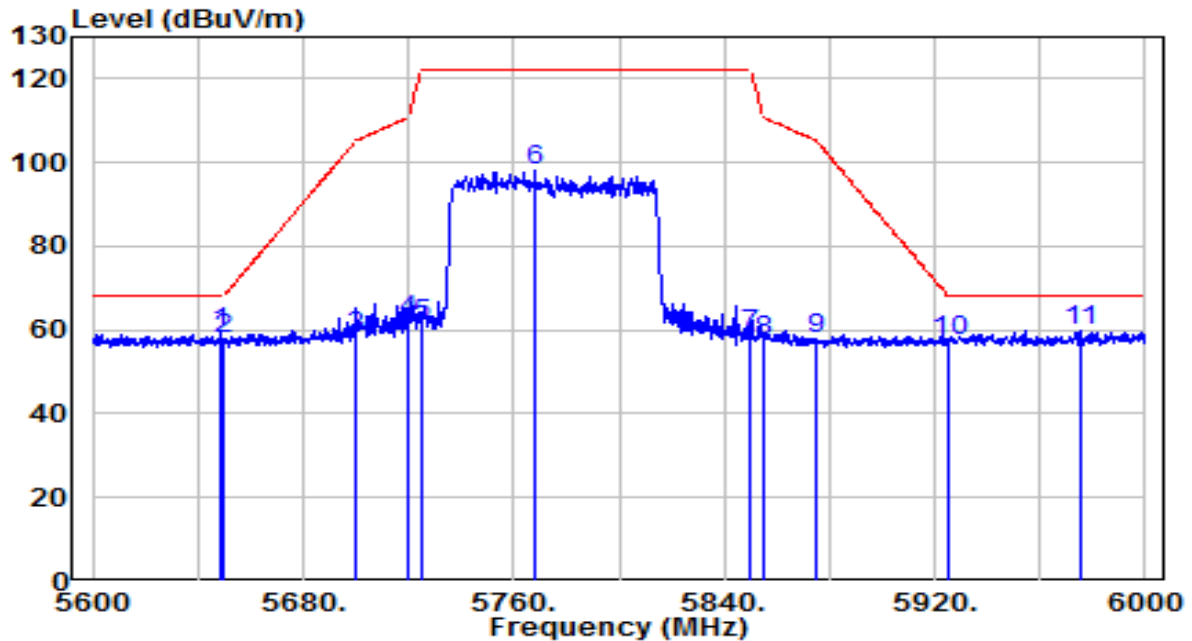

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5648.400	37.82	21.31	59.13	-9.07	68.20	Peak
2	5650.000	36.70	21.32	58.02	-10.18	68.20	Peak
3	5700.000	36.79	21.50	58.29	-46.91	105.20	Peak
4	5720.000	40.94	21.57	62.51	-48.29	110.80	Peak
5	5725.000	39.87	21.59	61.46	-60.74	122.20	Peak
6	5767.800	76.17	21.74	97.92	N/A	N/A	Peak
7	5850.000	36.67	22.04	58.71	-63.49	122.20	Peak
8	5855.000	35.17	22.06	57.24	-53.56	110.80	Peak
9	5875.000	35.87	22.14	58.00	-47.20	105.20	Peak
10	5925.000	35.02	22.32	57.34	-10.86	68.20	Peak
11	* 5975.000	37.24	22.50	59.74	-8.46	68.20	Peak


Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.1°C/43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

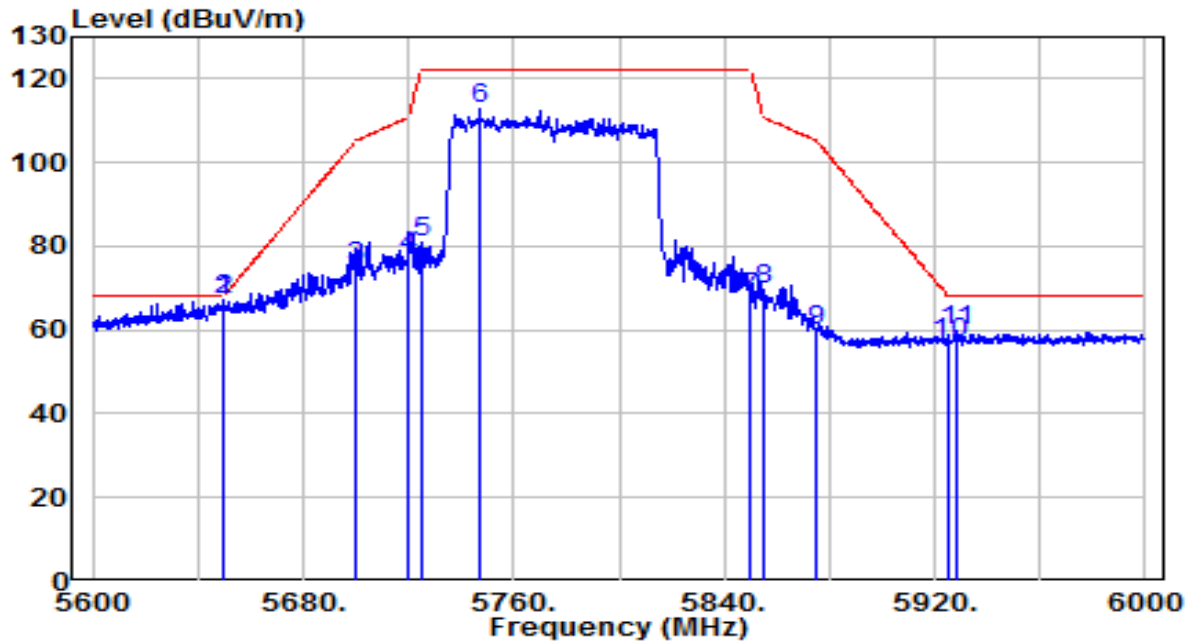

No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5649.800	45.73	21.32	67.05	-1.15	68.20	Peak
2		5650.000	45.68	21.32	67.00	-1.20	68.20	Peak
3		5700.000	53.78	21.50	75.28	-29.92	105.20	Peak
4		5720.000	56.12	21.57	77.69	-33.11	110.80	Peak
5		5725.000	59.49	21.59	81.08	-41.12	122.20	Peak
6		5747.200	90.99	21.67	112.66	N/A	N/A	Peak
7		5850.000	45.50	22.04	67.54	-54.66	122.20	Peak
8		5855.000	47.46	22.06	69.52	-41.28	110.80	Peak
9		5875.000	37.84	22.14	59.97	-45.23	105.20	Peak
10		5925.000	34.55	22.32	56.87	-11.33	68.20	Peak
11		5928.000	37.56	22.33	59.89	-8.31	68.20	Peak


Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

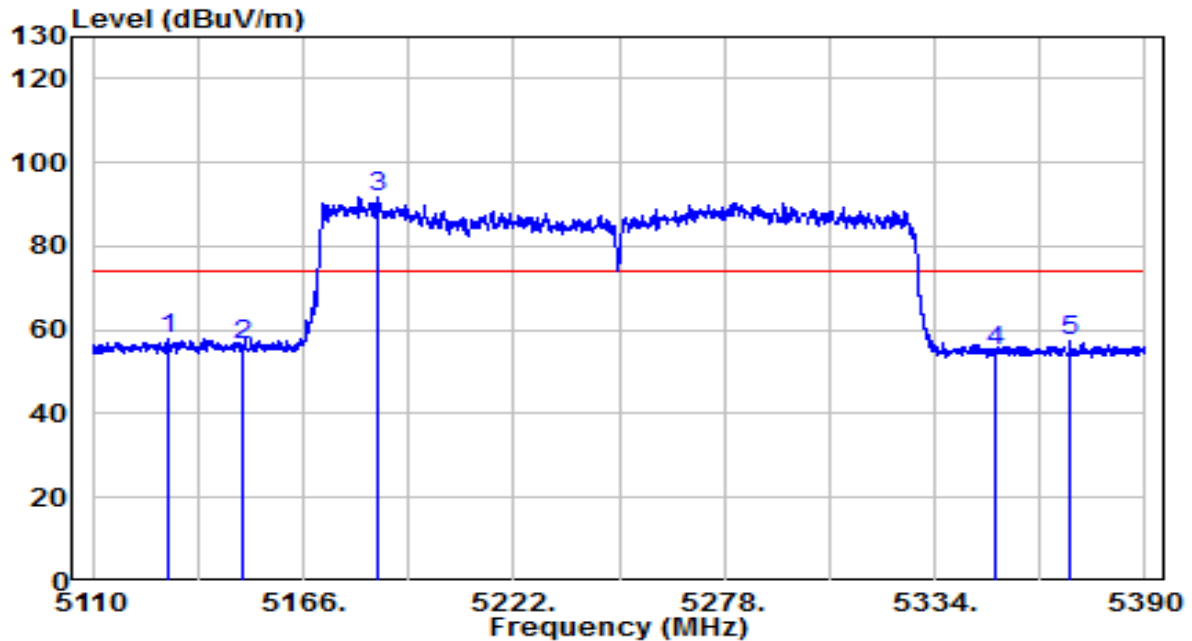


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.740	37.69	20.16	57.85	-16.15	74.00	Peak
2	5150.040	36.35	20.20	56.55	-17.45	74.00	Peak
3	* 5185.740	71.57	20.25	91.83	N/A	N/A	Peak
4	5350.000	34.21	20.52	54.73	-19.27	74.00	Peak
5	5369.980	36.81	20.56	57.37	-16.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

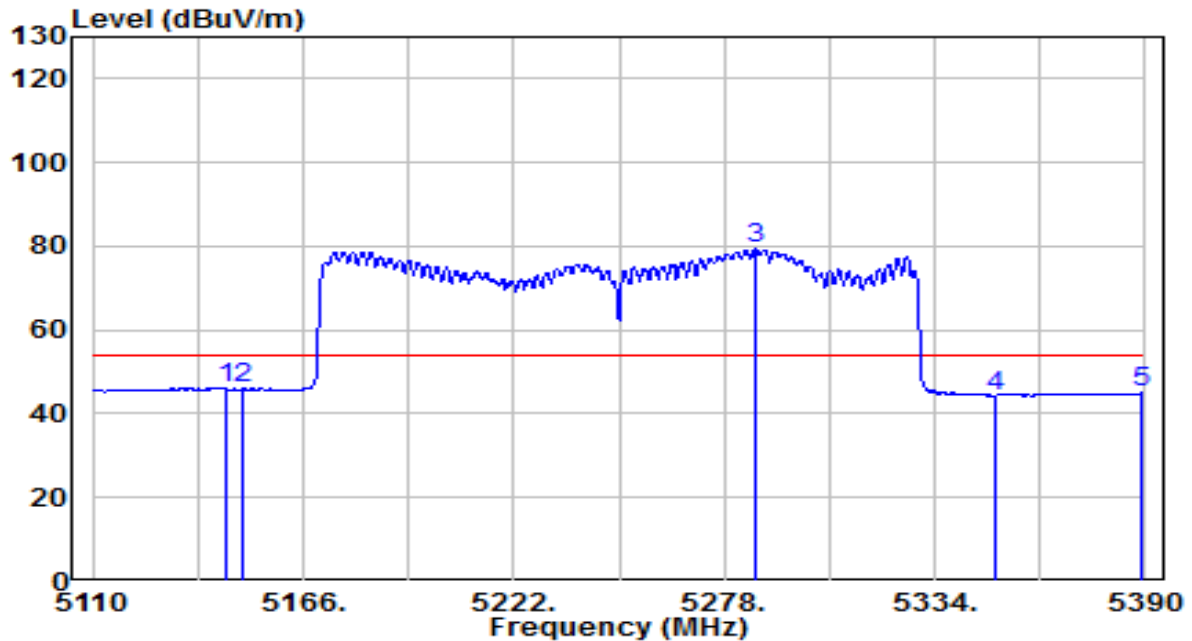


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.420	25.86	20.19	46.05	-7.95	54.00	Average
2	5150.040	25.73	20.20	45.93	-8.07	54.00	Average
3	* 5286.260	58.85	20.42	79.27	N/A	N/A	Average
4	5350.000	23.78	20.52	44.31	-9.69	54.00	Average
5	5388.880	24.33	20.59	44.92	-9.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

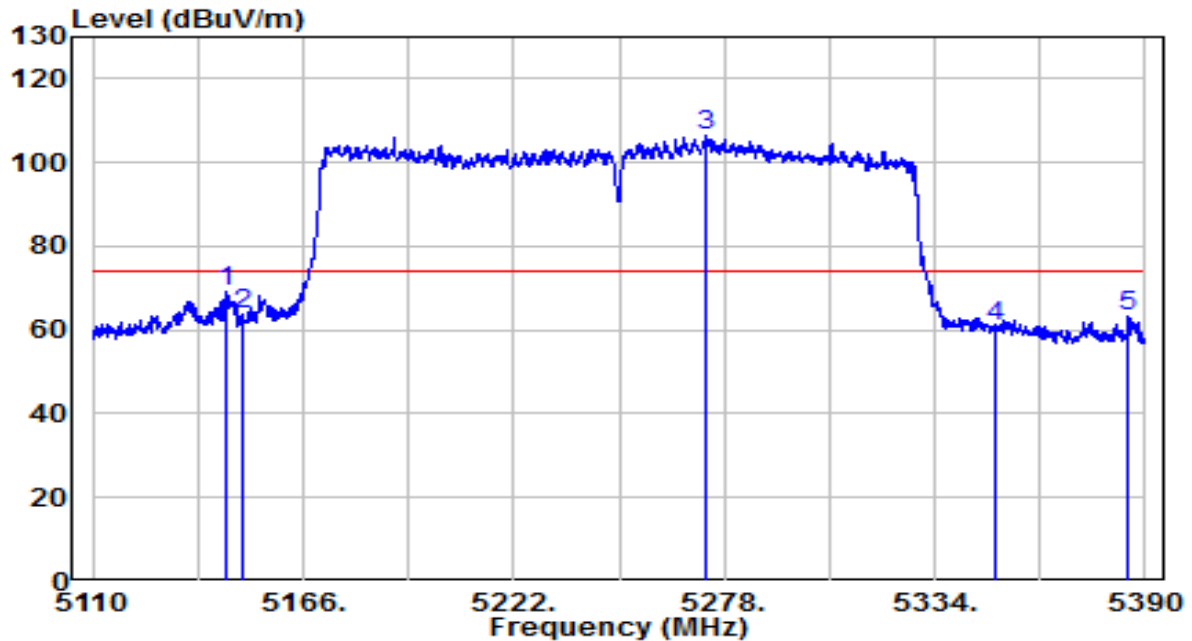


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.280	49.04	20.19	69.22	-4.78	74.00	Peak
2	5150.040	43.51	20.20	63.71	-10.29	74.00	Peak
3	* 5272.960	86.17	20.40	106.57	N/A	N/A	Peak
4	5350.000	40.53	20.52	61.05	-12.95	74.00	Peak
5	5385.240	42.94	20.58	63.52	-10.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

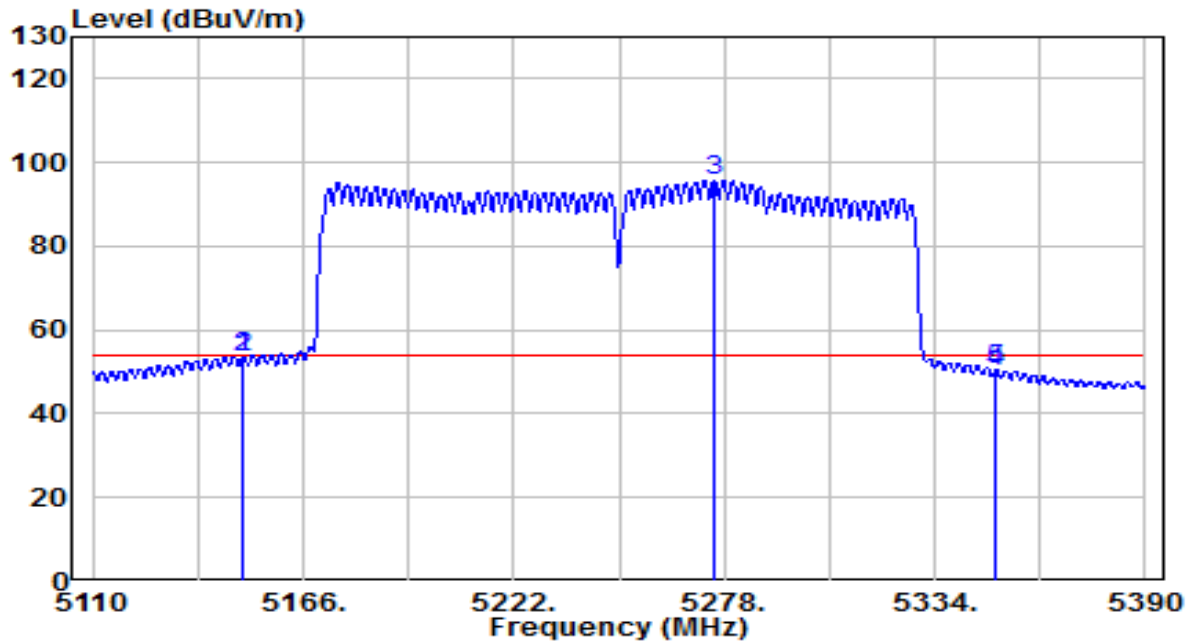


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.43	20.20	53.63	-0.37	54.00	Average
2	5150.040	33.43	20.20	53.63	-0.37	54.00	Average
3	* 5275.340	75.44	20.40	95.84	N/A	N/A	Average
4	5350.000	29.67	20.52	50.20	-3.80	54.00	Average
5	5350.380	29.98	20.52	50.51	-3.49	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

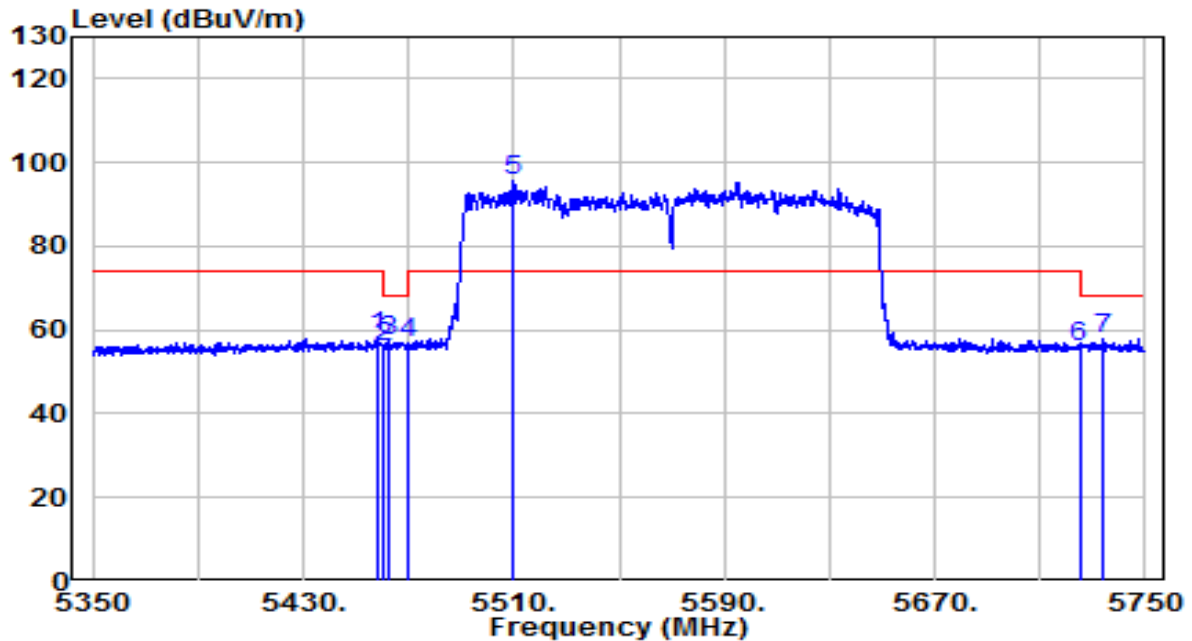


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.000	37.58	20.70	58.28	-15.72	74.00	Peak
2	5460.000	35.18	20.70	55.89	-12.31	68.20	Peak
3	5462.200	36.76	20.71	57.47	-10.73	68.20	Peak
4	5470.000	36.02	20.72	56.74	-11.46	68.20	Peak
5	* 5509.800	74.97	20.81	95.78	N/A	N/A	Peak
6	5725.000	34.26	21.59	55.84	-12.36	68.20	Peak
7	5733.600	36.19	21.62	57.81	-10.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Tri-Band Wi-Fi 6 Router	Date of Test	2021-09-15
Factor	BBHA 9120D	Temp. / Humidity	24.6°C/47%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

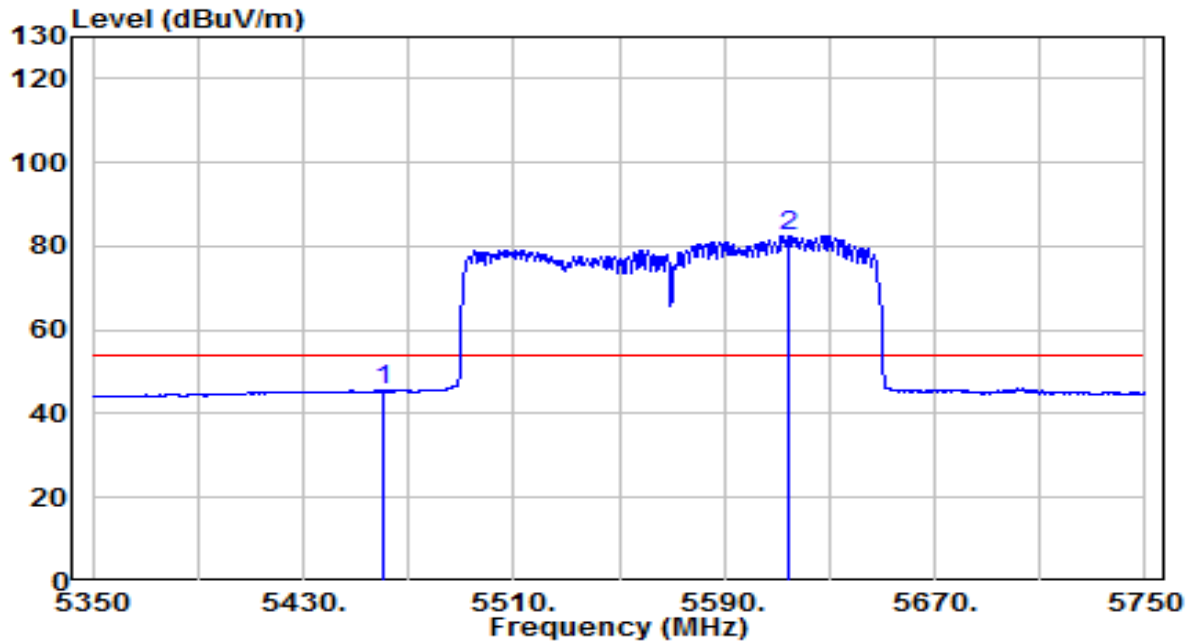

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	24.73	20.70	45.44	-8.56	54.00	Average
2	* 5614.600	61.37	21.19	82.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.