



802.11ax-HE20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3_N_{SS} = 4


Channel 36 (5180MHz)

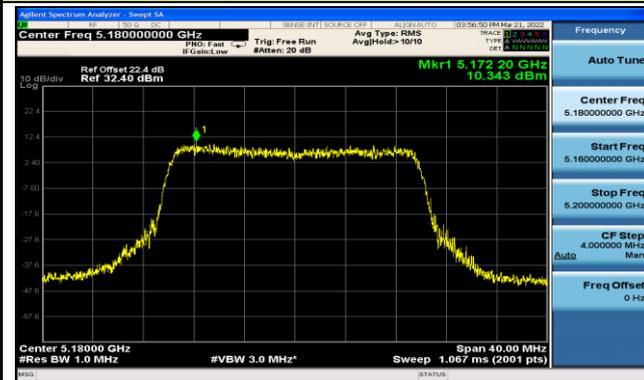


Channel 44 (5220MHz)

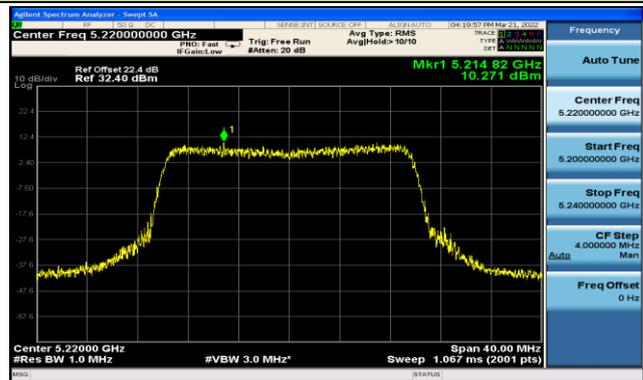


Channel 48 (5240MHz)

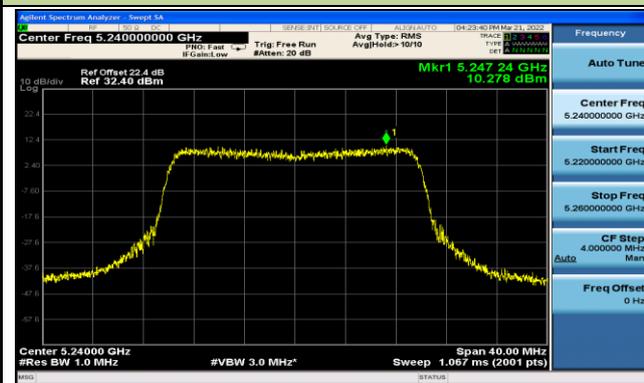


Channel 52 (5260MHz)

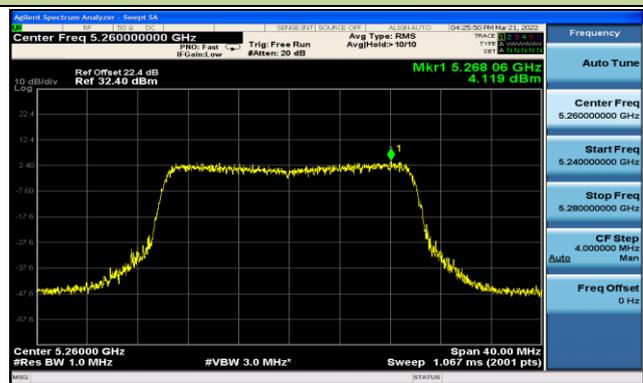


Channel 60 (5300MHz)

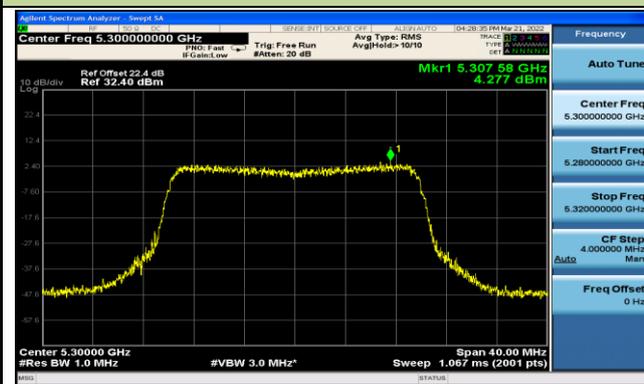


Channel 64 (5320MHz)

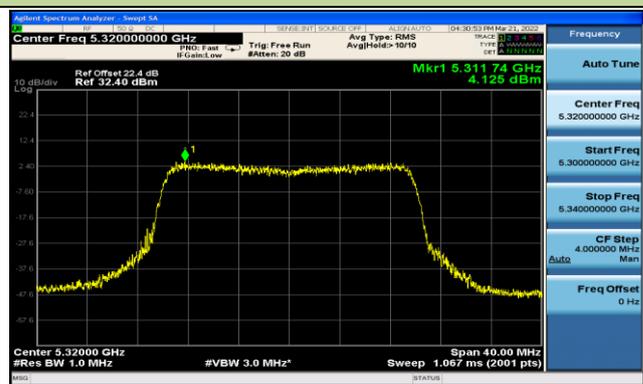


Channel 100 (5500MHz)

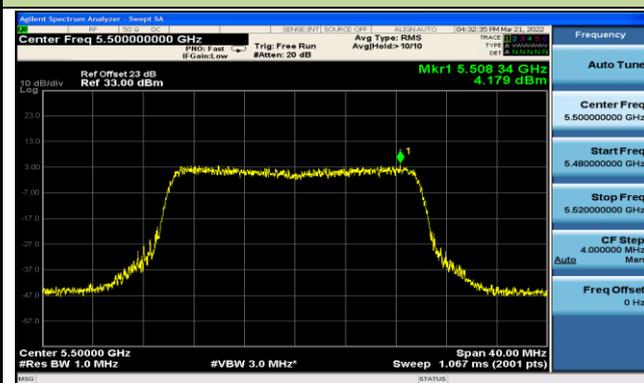


Channel 116 (5580MHz)

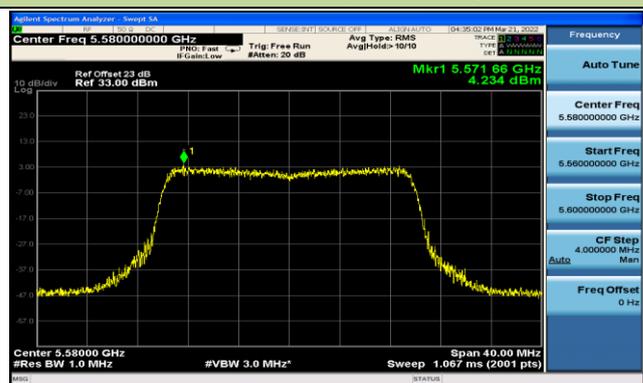

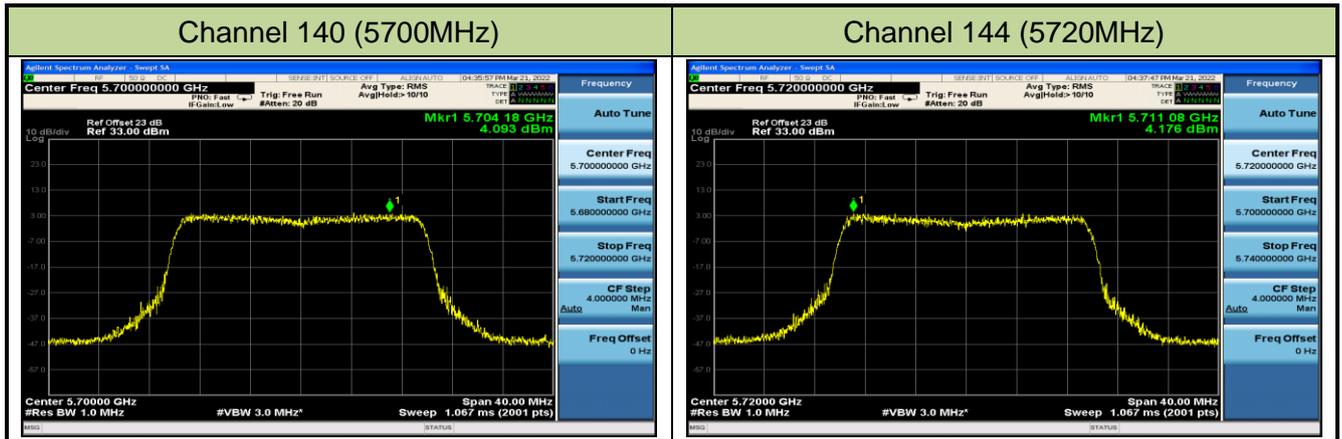


802.11ax-HE40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3_N_{SS} = 4


Channel 38 (5190MHz)

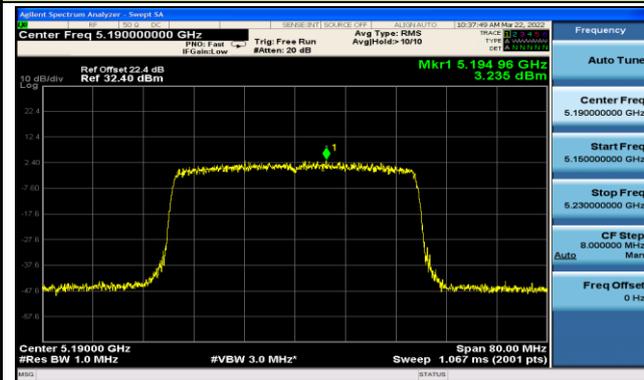


Channel 46 (5230MHz)

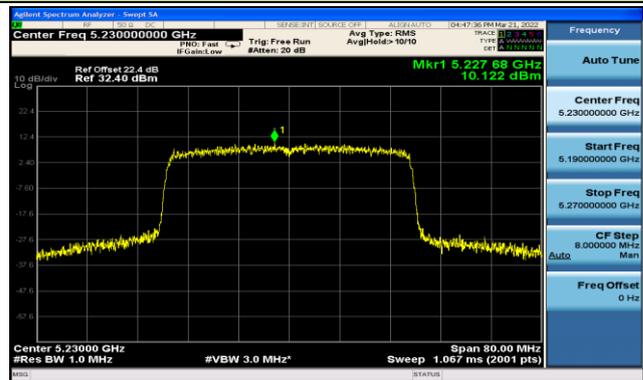


Channel 54 (5270MHz)

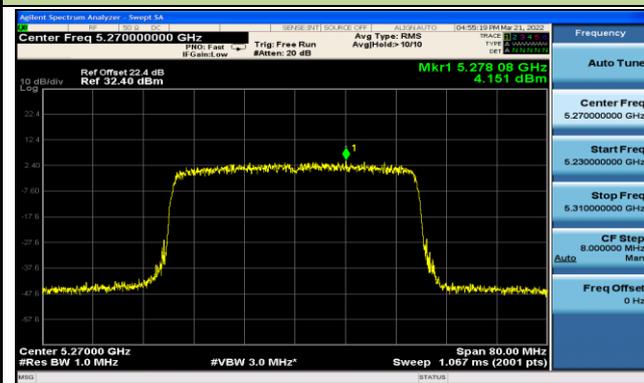


Channel 62 (5310MHz)

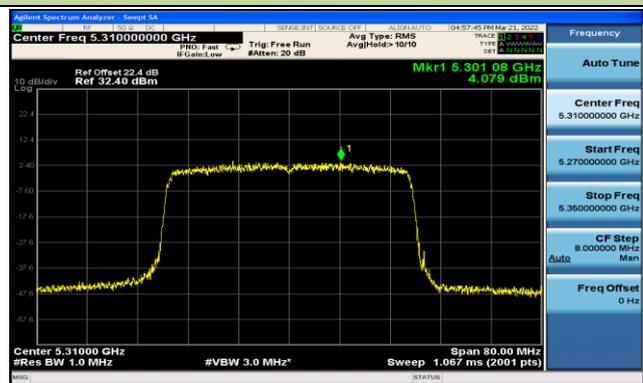


Channel 102 (5510MHz)

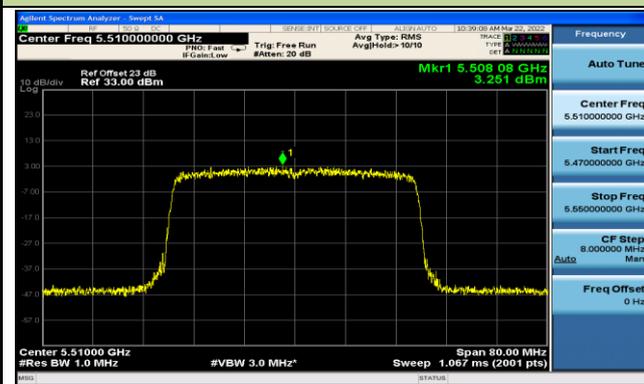


Channel 110 (5550MHz)

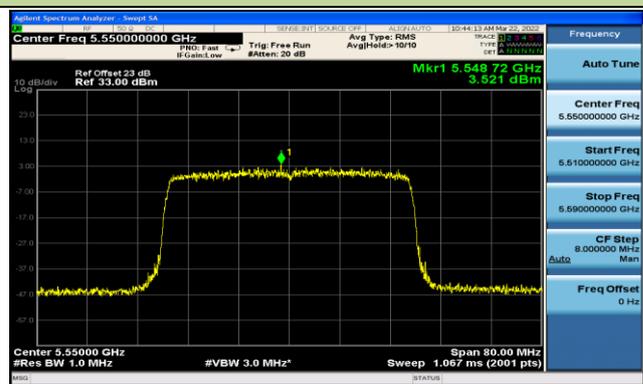

Channel 134 (5670MHz)

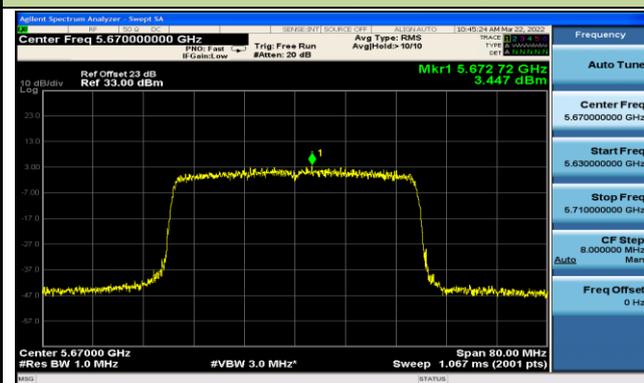


Channel 142 (5710MHz)

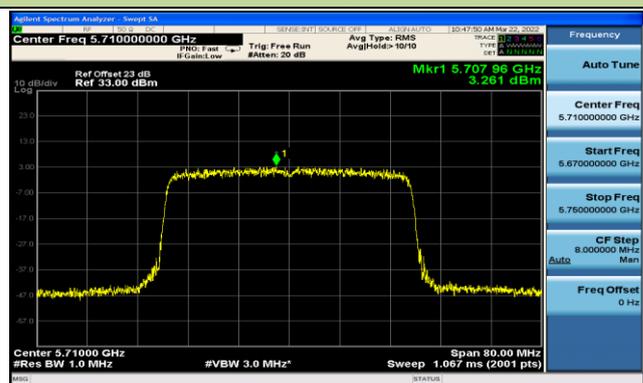


802.11ax-HE80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3_Nss = 4


Channel 42 (5210MHz)

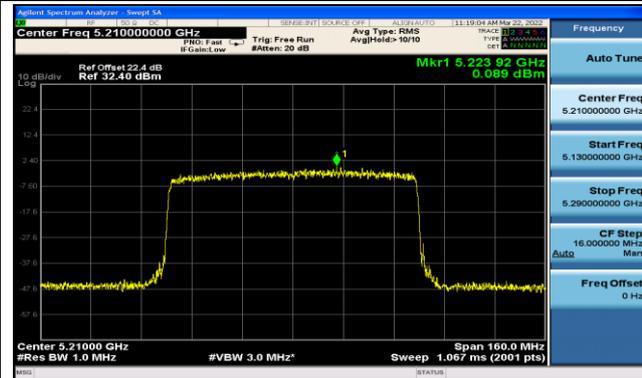


Channel 58 (5290MHz)

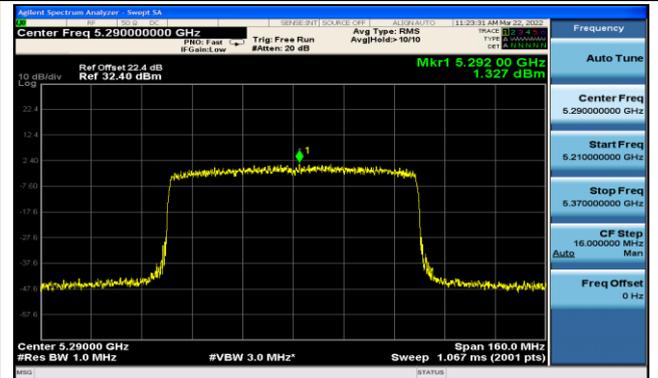


Channel 106 (5530MHz)

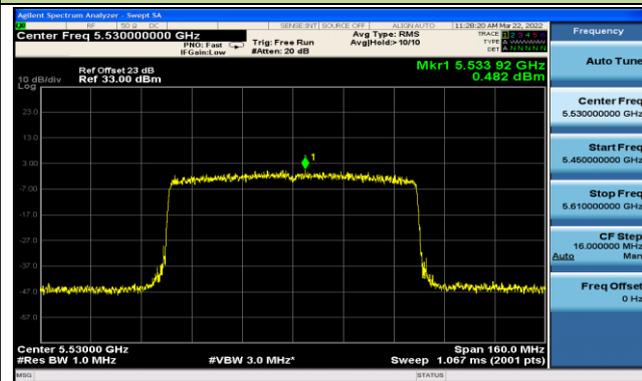

Channel 122 (5610MHz)

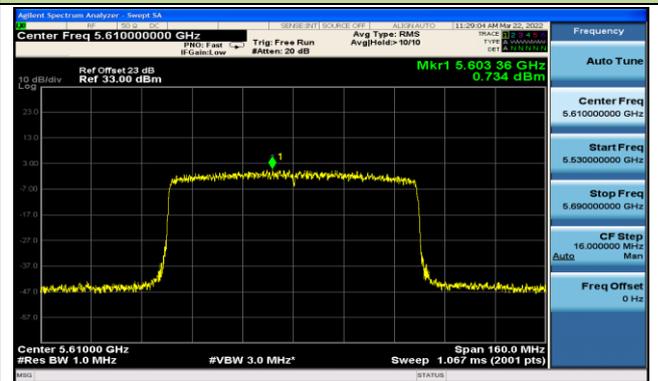



Channel 138 (5690MHz)

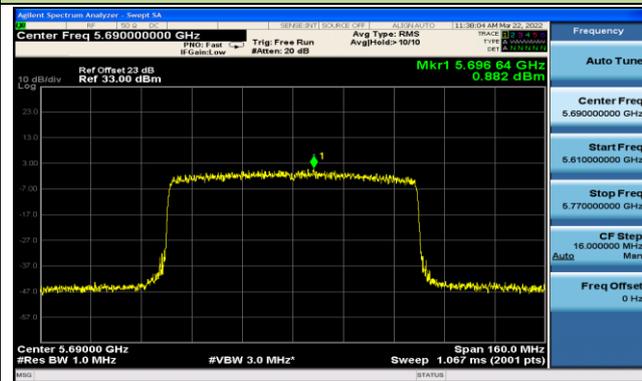

802.11ax-HE160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2+ 3_Nss = 4

Channel 50 (5250MHz)

Channel 114 (5570MHz)

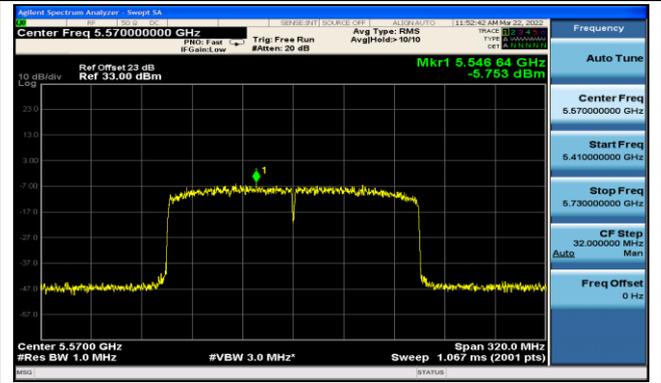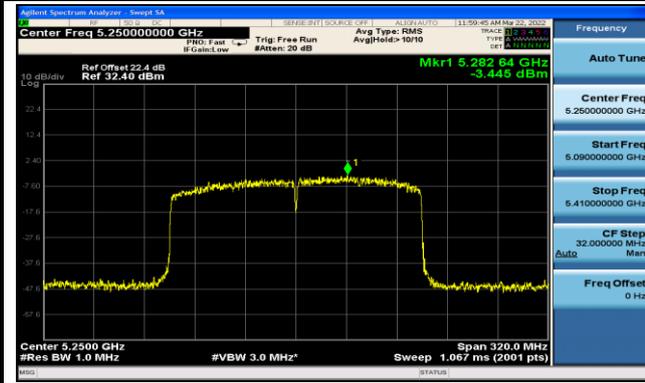

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5GHz band (IEEE 802.11 specification).

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

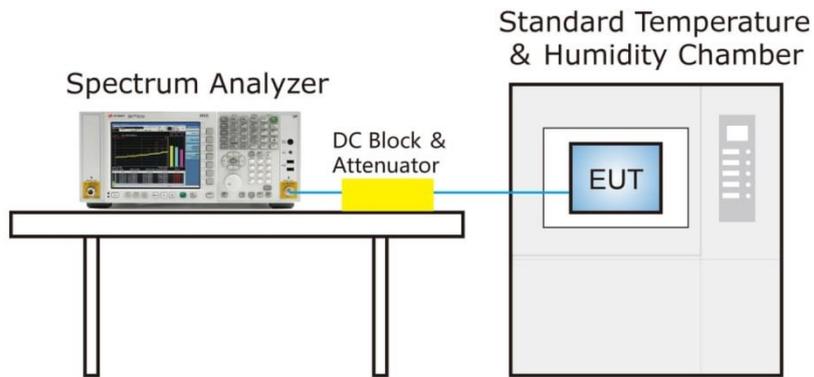

7.7.4. Test Result

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Eric
Test Site	SR3	Test Time	2022/3/23
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)
100%	120	- 30	18.92
		- 20	19.85
		- 10	18.22
		0	13.61
		+ 10	9.79
		+ 20	4.83
		+ 30	0.46
		+ 40	-3.44
		+ 50	-6.08
115%	138	+ 20	4.34
85%	102	+ 20	4.13

Note: Frequency Tolerance (ppm) = $\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}] / \text{Declared Frequency (Hz)}\} * 10^6$.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section II) G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

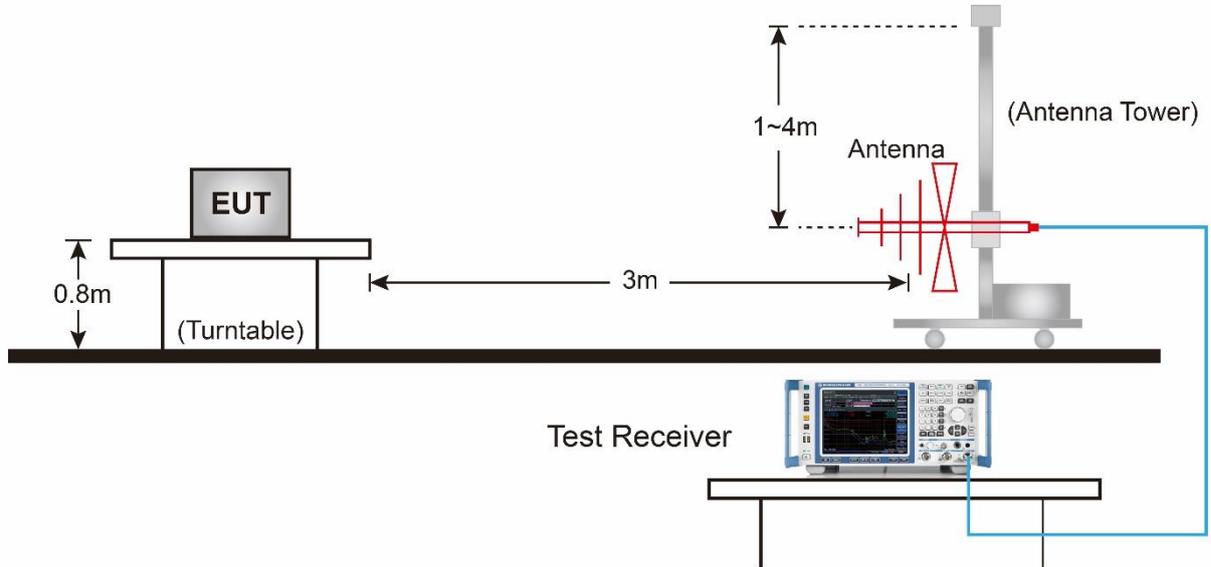


Above 1GHz Test Setup:

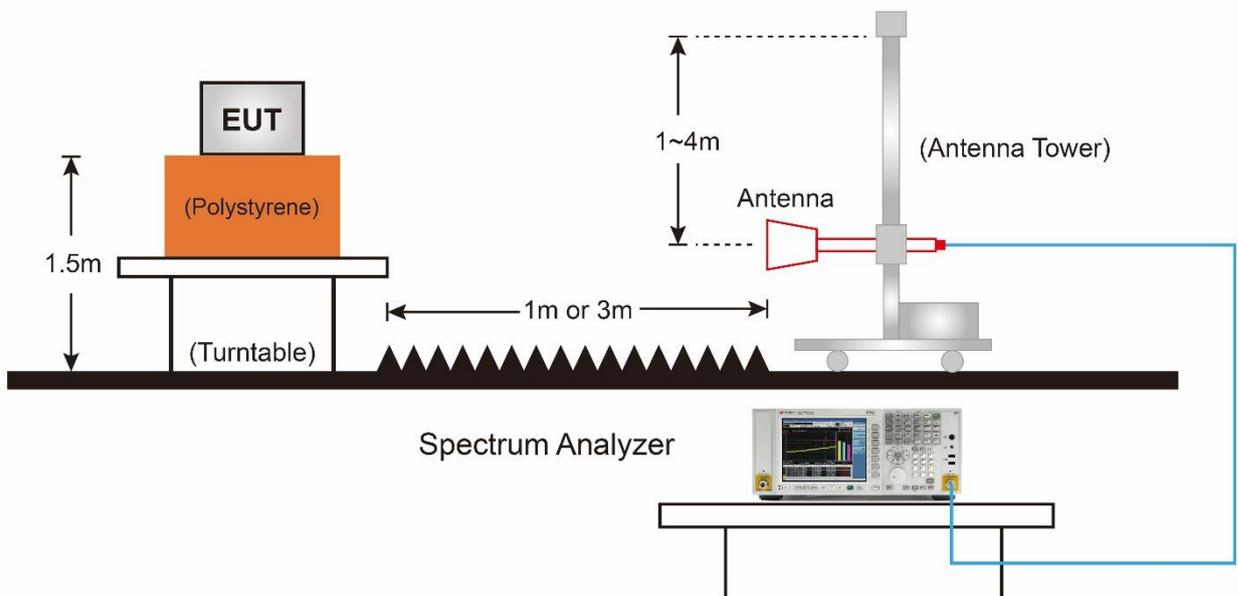

7.8.5. Test Result

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	VULB 9162	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

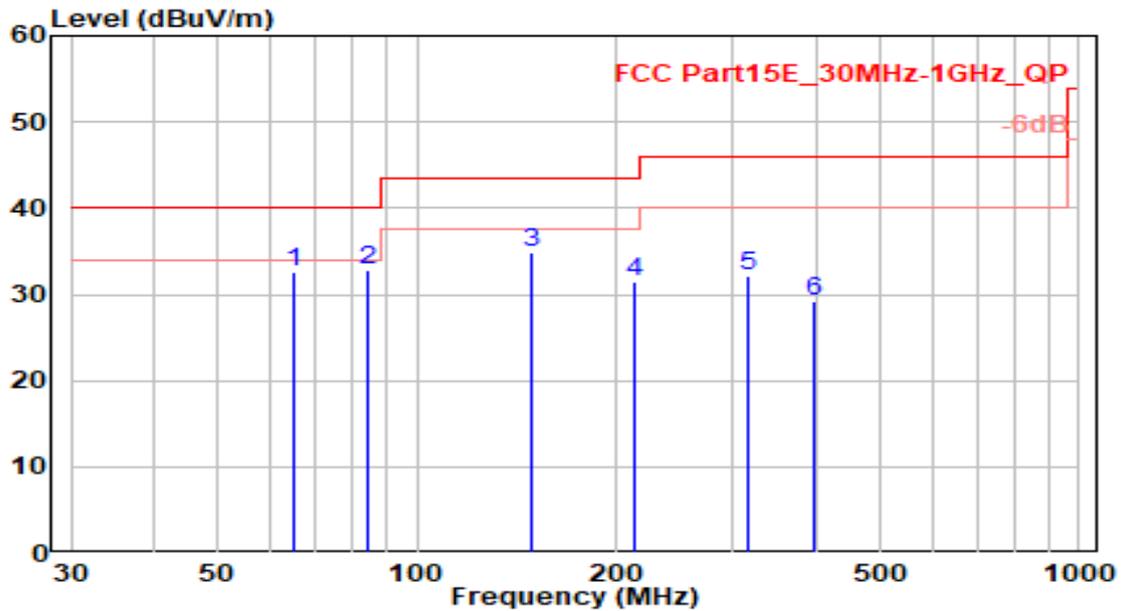


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	64.920	14.33	18.20	32.53	-7.47	40.00	200	100	QP
2	* 84.320	16.98	15.74	32.72	-7.28	40.00	200	90	QP
3	148.340	19.21	15.73	34.94	-8.56	43.50	150	265	QP
4	212.360	12.69	18.73	31.43	-12.07	43.50	150	270	QP
5	316.150	10.29	21.87	32.16	-13.84	46.00	100	290	QP
6	399.570	5.29	24.03	29.32	-16.68	46.00	100	290	QP

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	VULB 9162	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

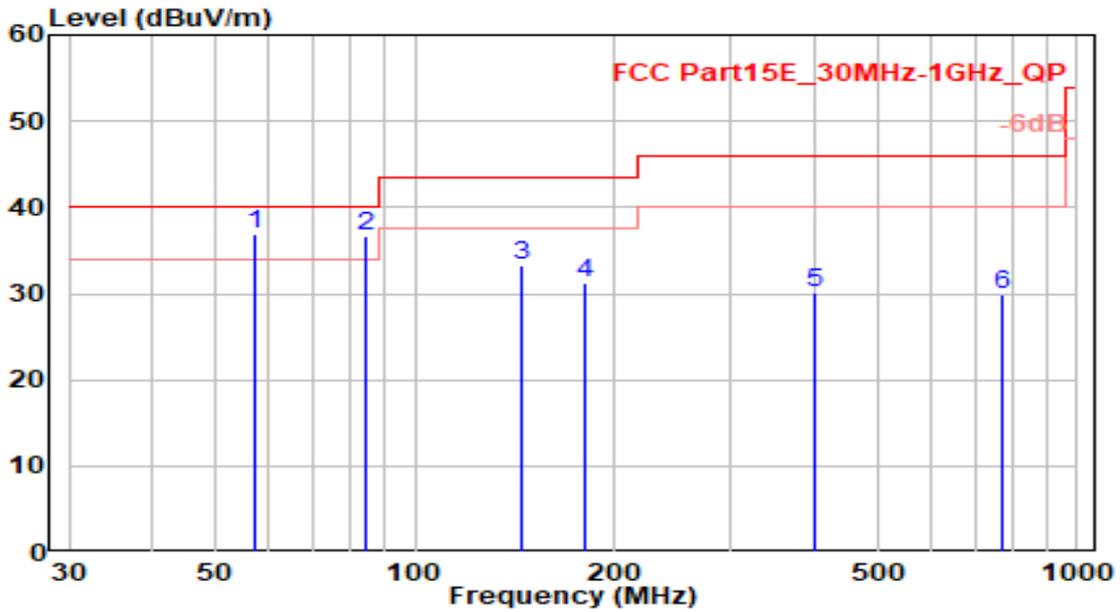


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 57.160	16.50	20.49	36.99	-3.01	40.00	100	60	QP
2	84.320	21.01	15.74	36.75	-3.25	40.00	100	215	QP
3	144.460	17.66	15.64	33.30	-10.20	43.50	100	235	QP
4	181.320	13.89	17.32	31.21	-12.29	43.50	100	290	QP
5	400.540	5.97	24.04	30.01	-15.99	46.00	150	85	QP
6	771.080	0.21	29.73	29.93	-16.07	46.00	200	300	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	VULB 9162	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

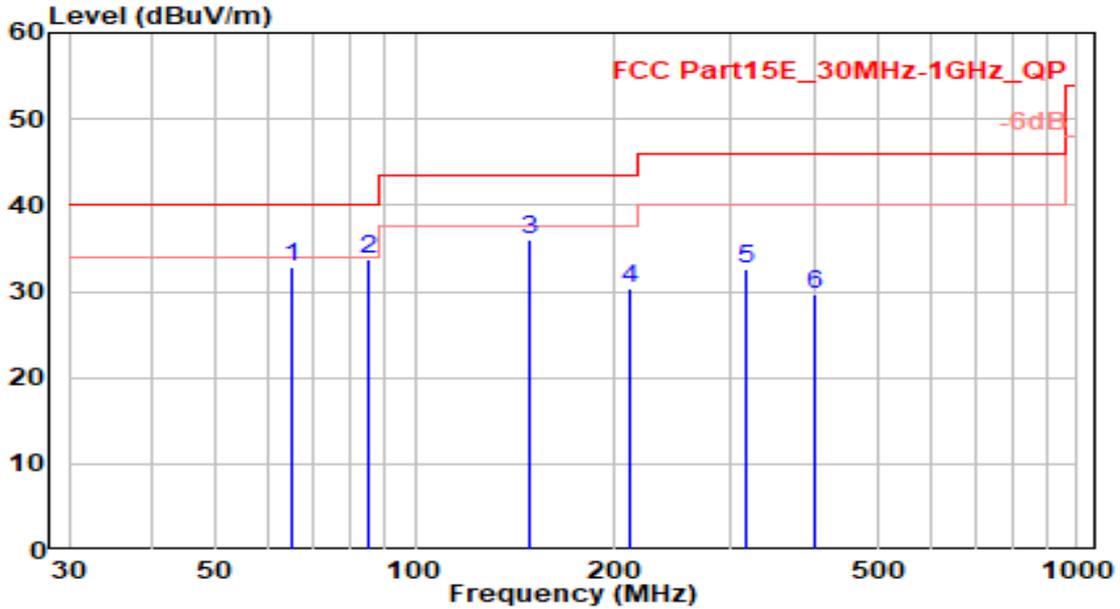


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	64.950	14.63	18.19	32.82	-7.18	40.00	210	150	QP
2	* 84.660	17.87	15.85	33.72	-6.28	40.00	200	75	QP
3	149.120	20.19	15.75	35.94	-7.56	43.50	150	270	QP
4	211.000	11.75	18.68	30.43	-13.07	43.50	150	270	QP
5	316.660	10.67	21.89	32.56	-13.44	46.00	100	290	QP
6	399.800	5.69	24.04	29.72	-16.28	46.00	100	290	QP

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	VULB 9162	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

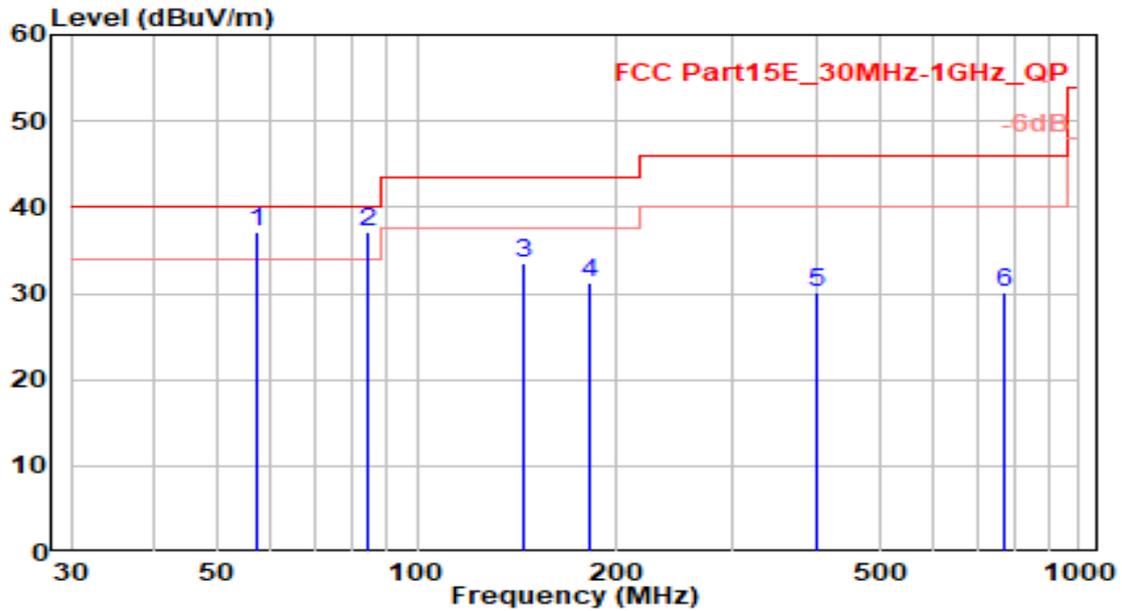


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	57.300	16.65	20.47	37.12	-2.88	40.00	100	35	QP
2	* 84.600	21.31	15.83	37.15	-2.85	40.00	105	215	QP
3	144.600	17.86	15.65	33.51	-9.99	43.50	100	240	QP
4	181.600	13.91	17.36	31.26	-12.24	43.50	100	295	QP
5	400.800	6.12	24.05	30.17	-15.83	46.00	150	85	QP
6	771.360	0.29	29.73	30.02	-15.98	46.00	200	300	QP

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

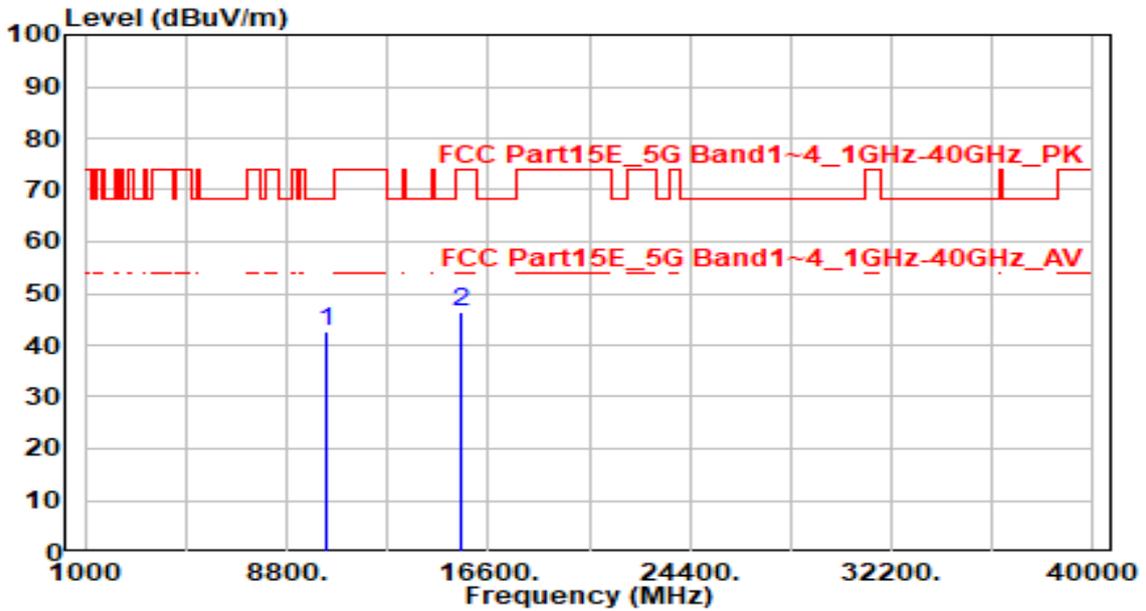


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	38.20	4.62	42.82	-25.38	68.20	300	20	Peak
2	15540.000	40.57	5.91	46.49	-27.51	74.00	300	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

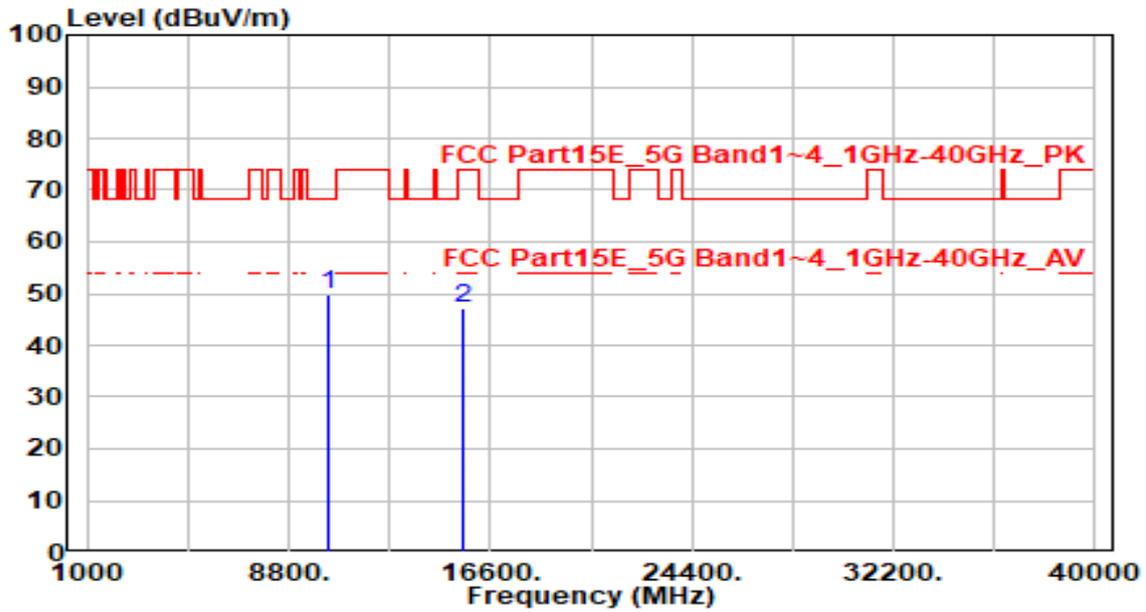


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	45.01	4.62	49.63	-18.57	68.20	300	160	Peak
2	15540.000	41.26	5.91	47.17	-26.83	74.00	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

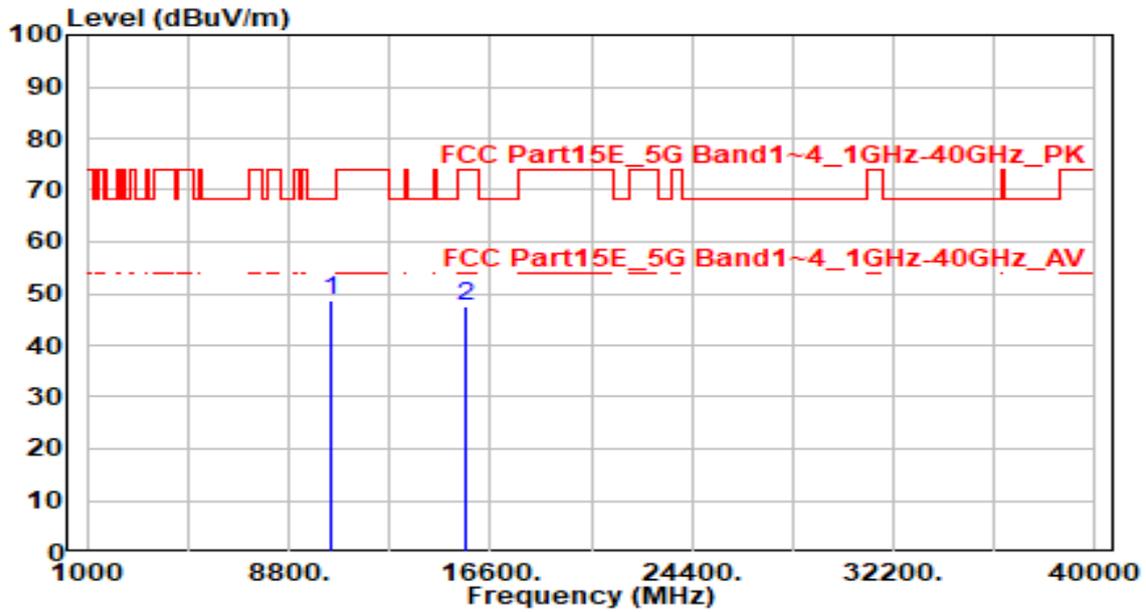


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	44.01	4.62	48.63	-19.57	68.20	300	275	Peak
2	15660.000	41.70	5.98	47.68	-26.32	74.00	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

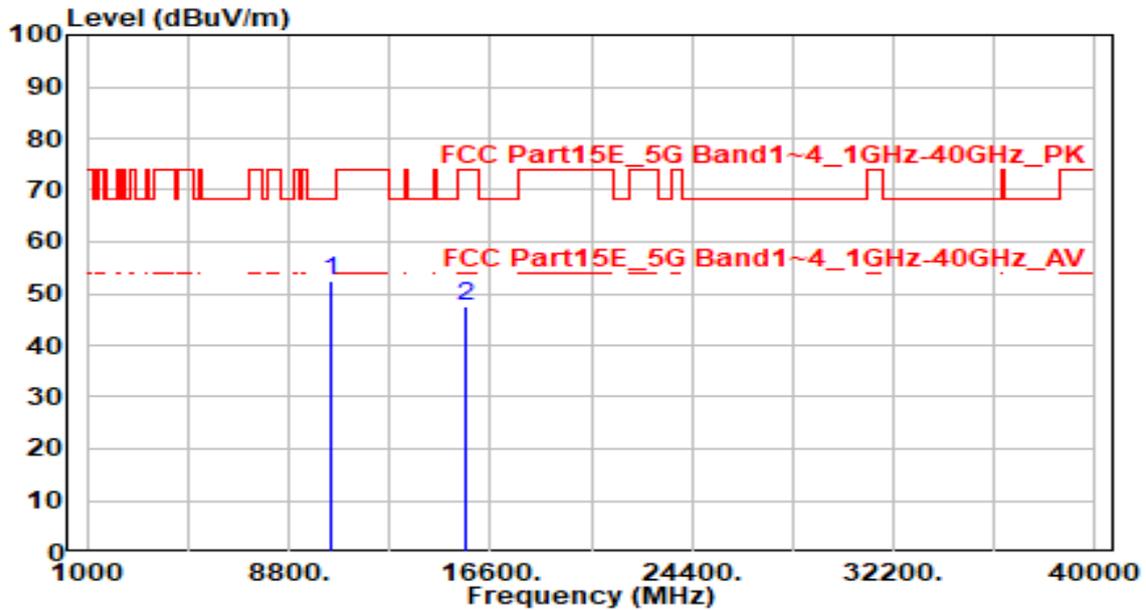


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	47.71	4.62	52.33	-15.87	68.20	200	235	Peak
2	15660.000	41.47	5.98	47.45	-26.55	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

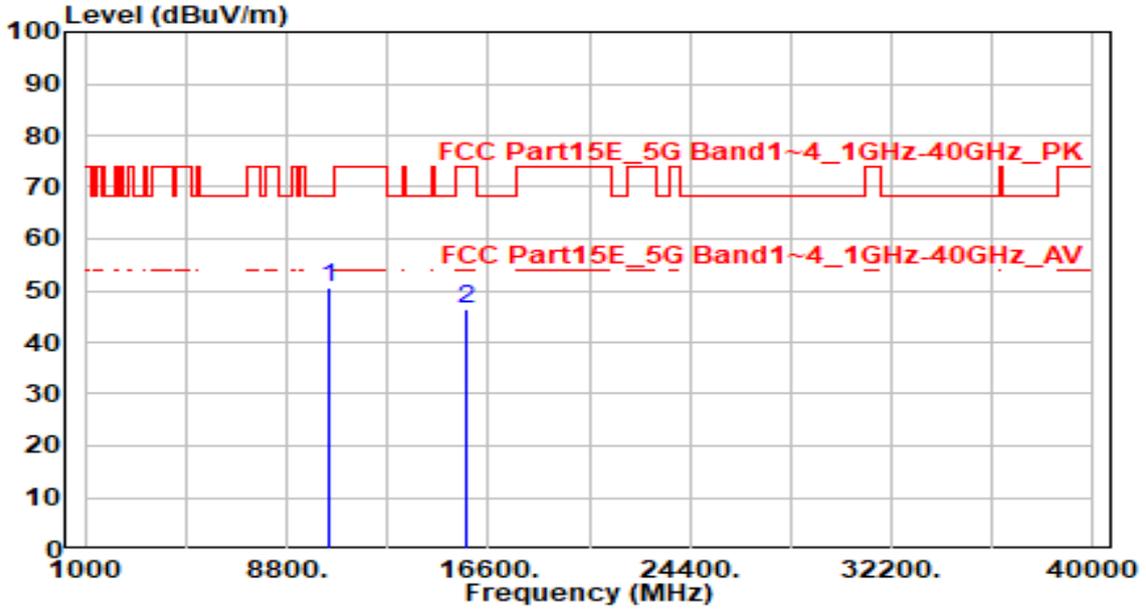


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	45.78	4.63	50.41	-17.79	68.20	300	200	Peak
2	15720.000	40.22	6.03	46.25	-27.75	74.00	300	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

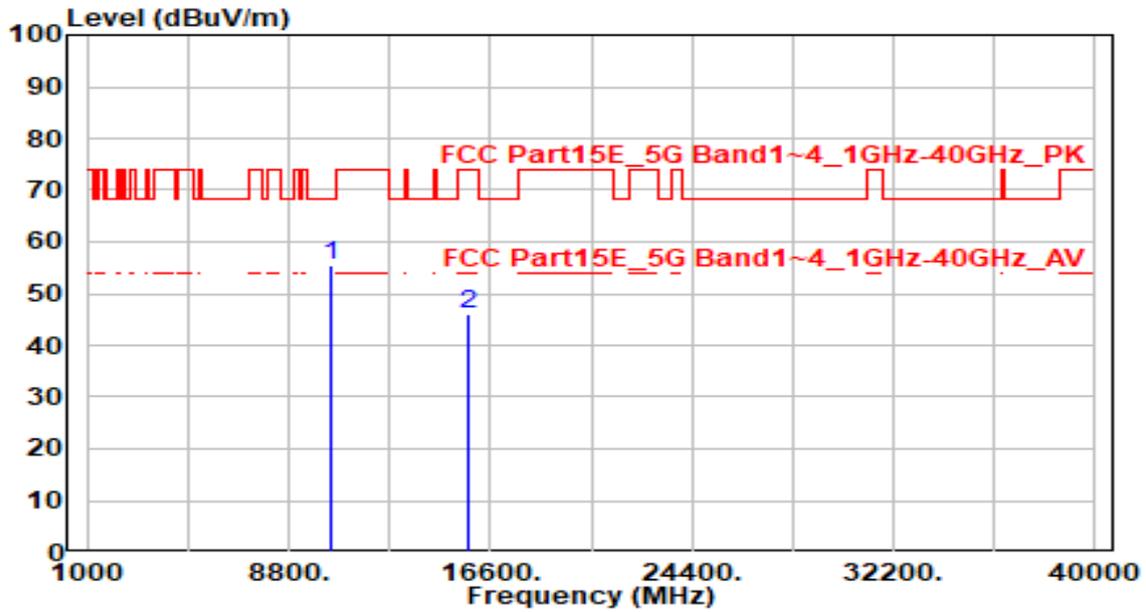


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	50.95	4.63	55.58	-12.62	68.20	200	155	Peak
2		40.04	6.03	46.07	-27.93	74.00	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

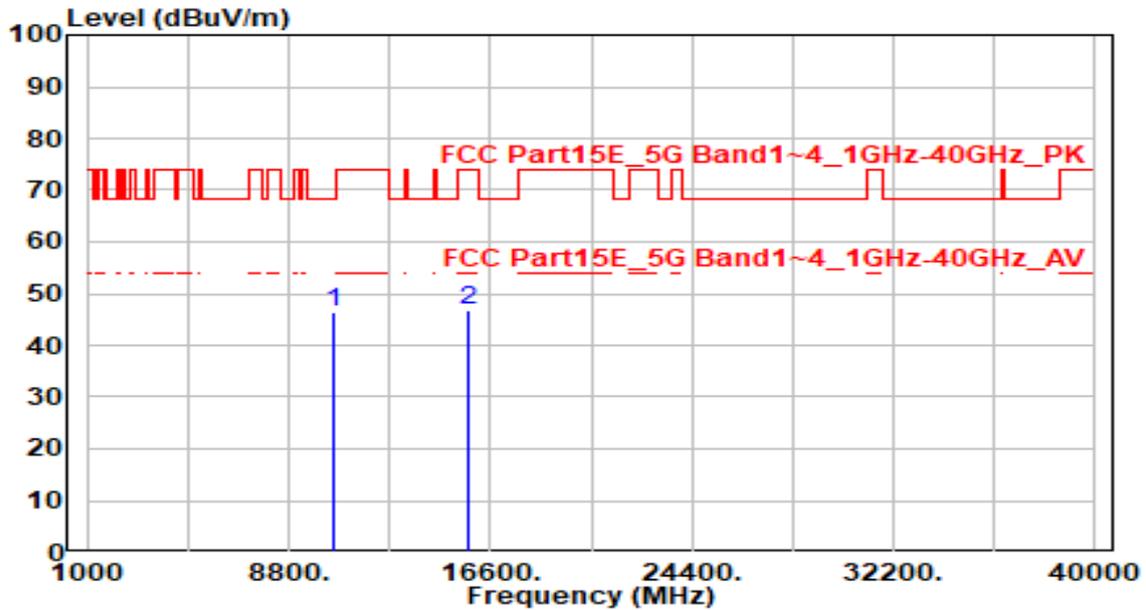


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	41.78	4.64	46.42	-21.78	68.20	200	170	Peak
2	15780.000	40.78	6.08	46.86	-27.14	74.00	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

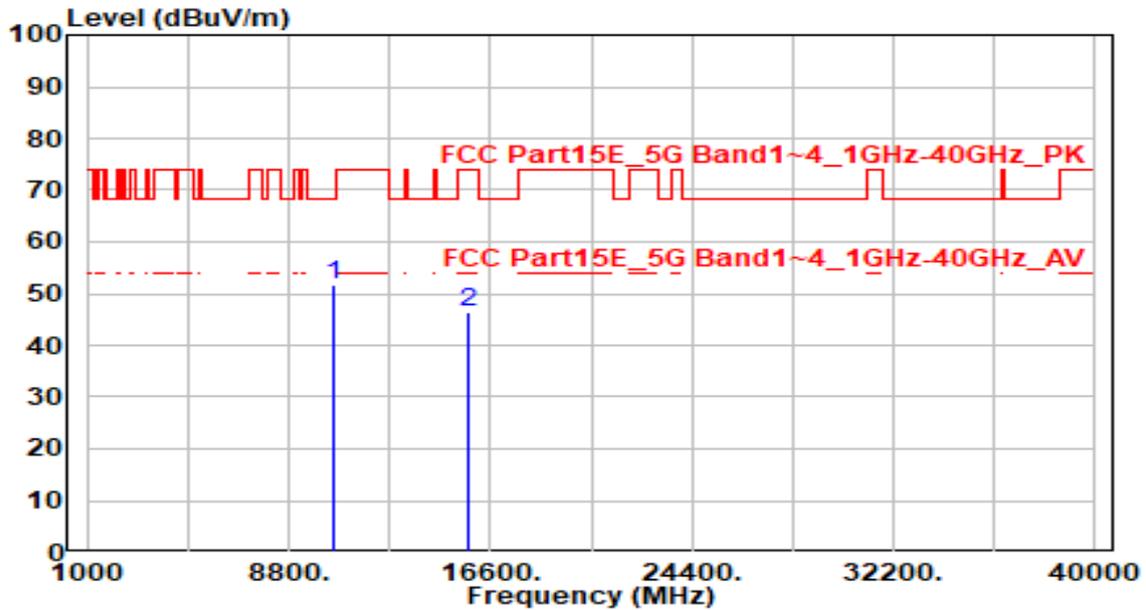


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	46.99	4.64	51.64	-16.56	68.20	200	170	Peak
2	15780.000	40.45	6.08	46.53	-27.47	74.00	300	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

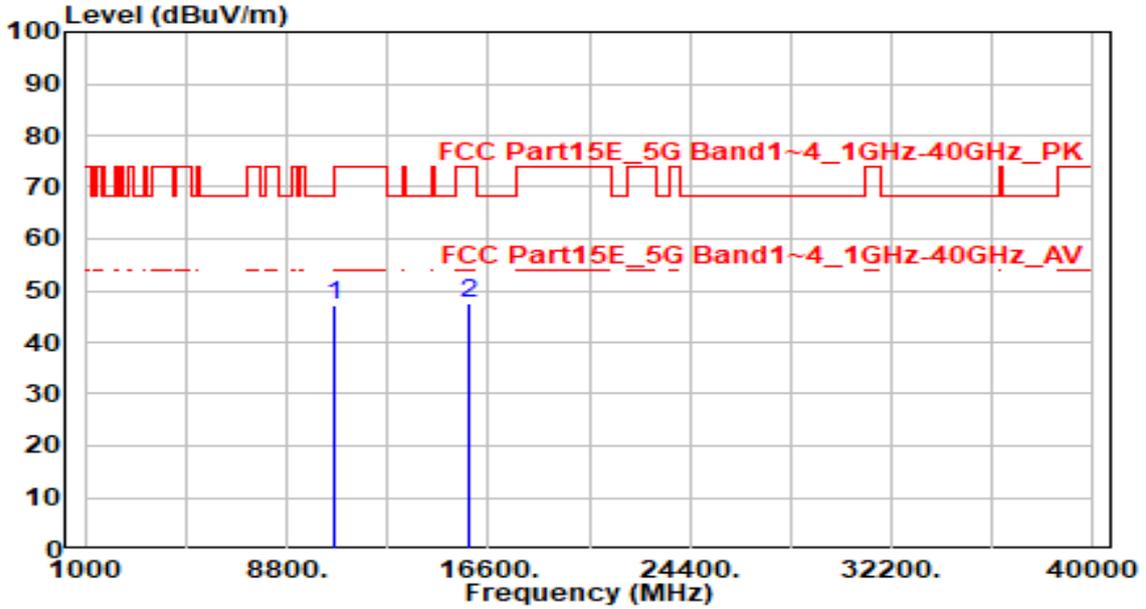


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	42.57	4.66	47.24	-20.96	68.20	300	5	Peak
2	15900.000	41.37	6.24	47.61	-26.39	74.00	300	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

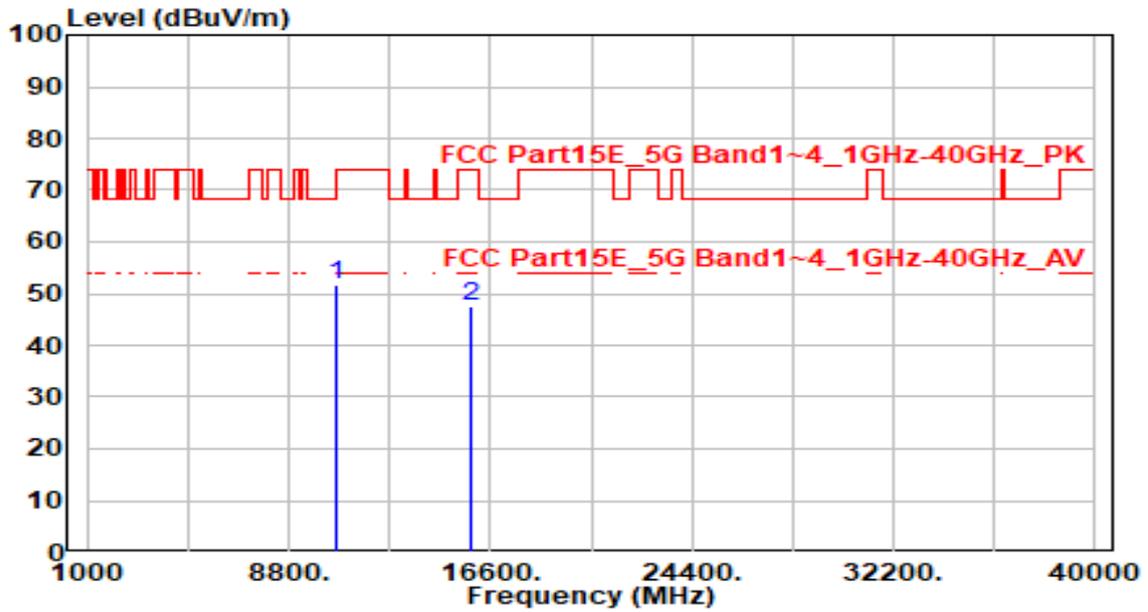


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10597.000	46.86	4.66	51.52	-16.68	68.20	200	50	Peak
2	15900.000	41.28	6.24	47.51	-26.49	74.00	240	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

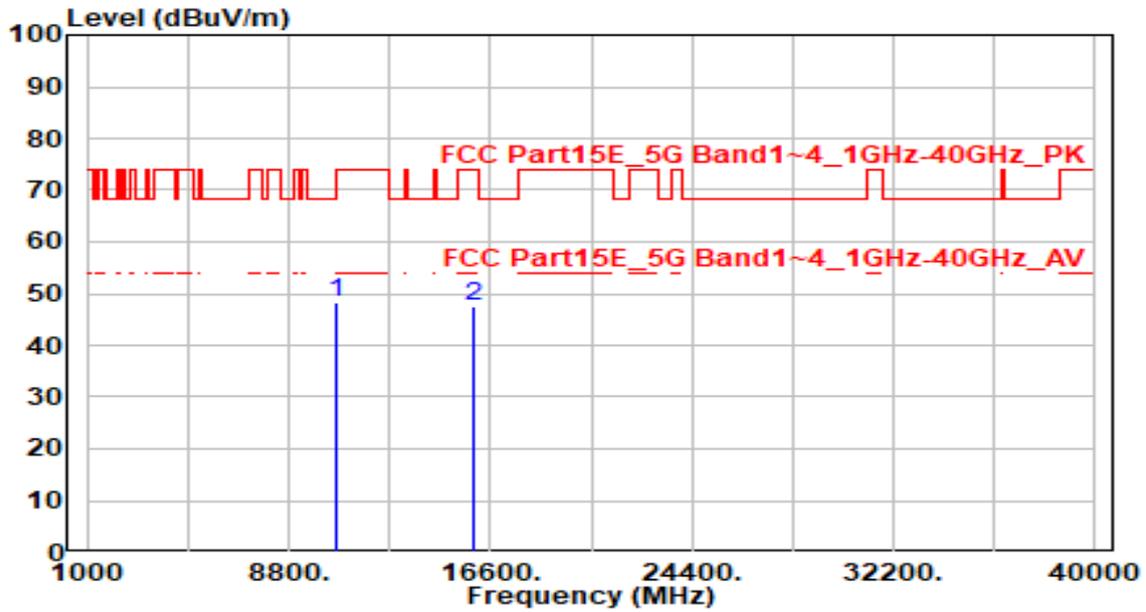


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10640.000	43.55	4.65	48.20	-25.80	74.00	200	210	Peak
2	15960.000	41.26	6.32	47.58	-26.42	74.00	300	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

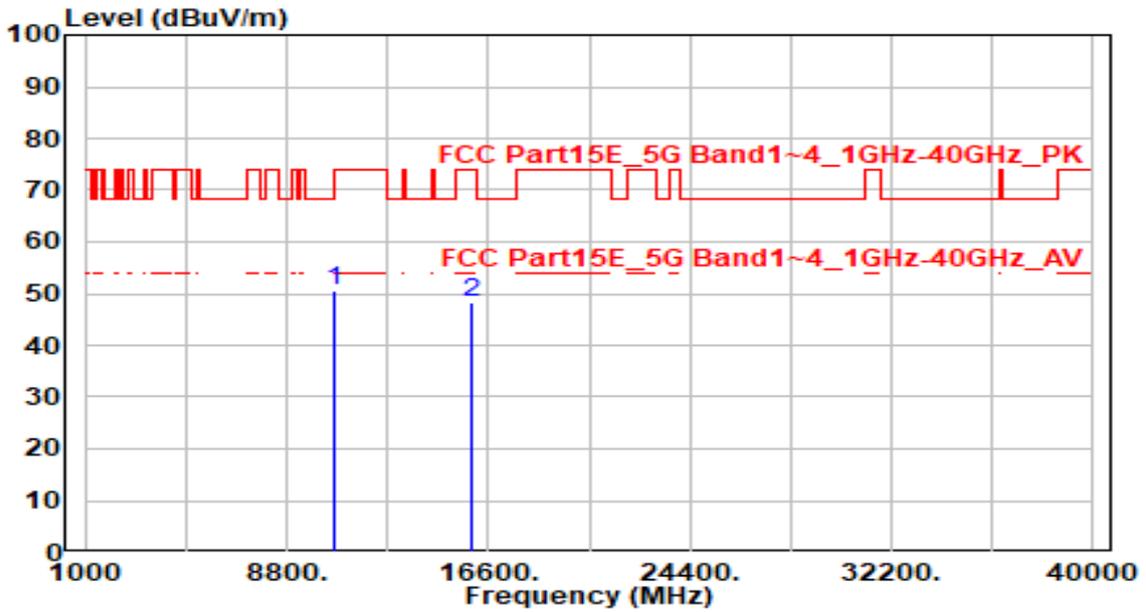


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10640.000	46.06	4.65	50.72	-23.28	74.00	200	135	Peak
2	15960.000	42.13	6.32	48.45	-25.55	74.00	200	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

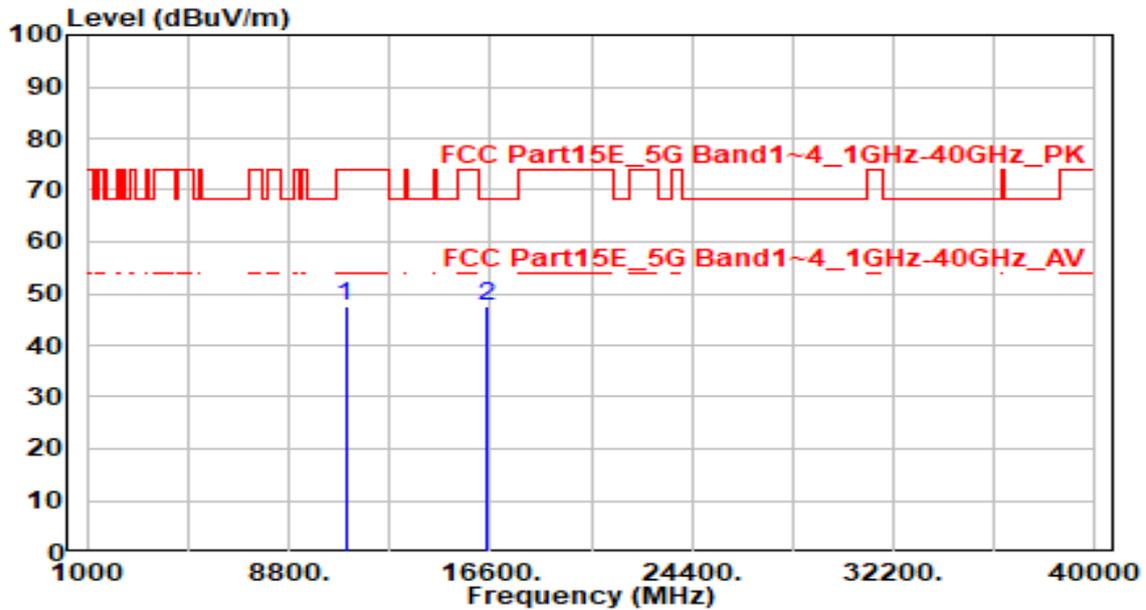


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.81	4.74	47.55	-26.45	74.00	300	0	Peak
2	* 16500.000	40.53	6.86	47.39	-20.81	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

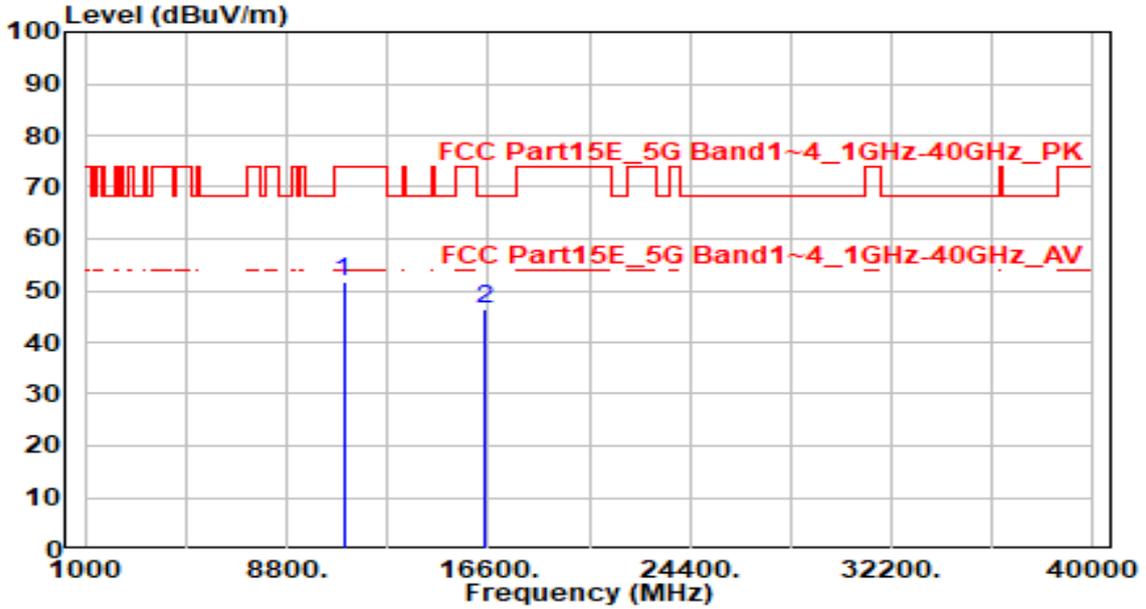


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	46.93	4.74	51.67	-22.33	74.00	200	155	Peak
2	* 16500.000	39.73	6.86	46.59	-21.61	68.20	300	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

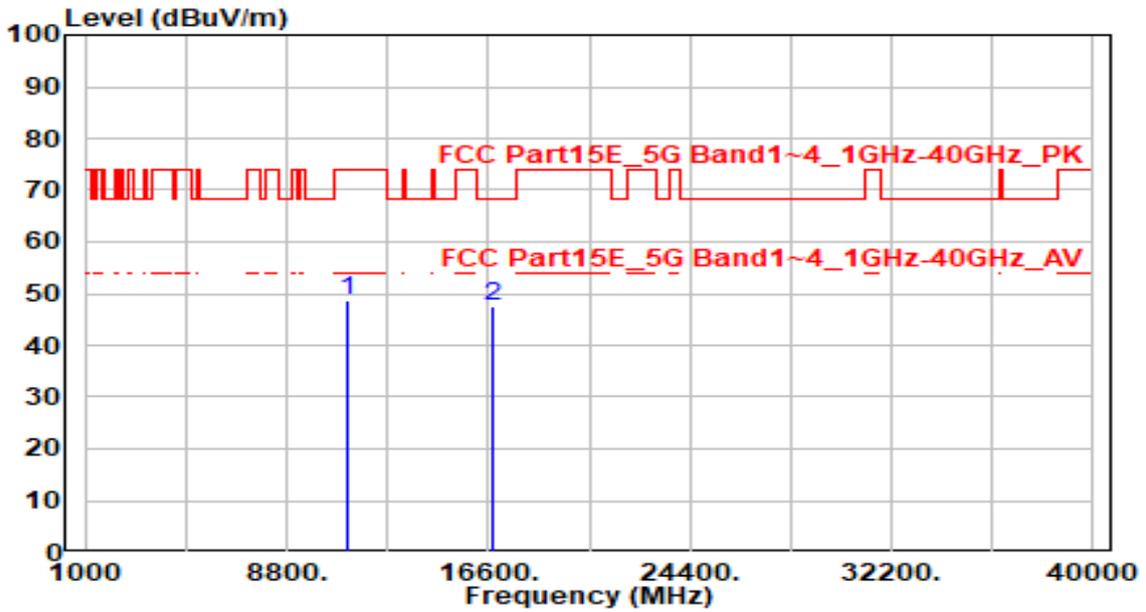


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.68	5.00	48.68	-25.32	74.00	300	0	Peak
2	* 16740.000	40.26	7.19	47.45	-20.75	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

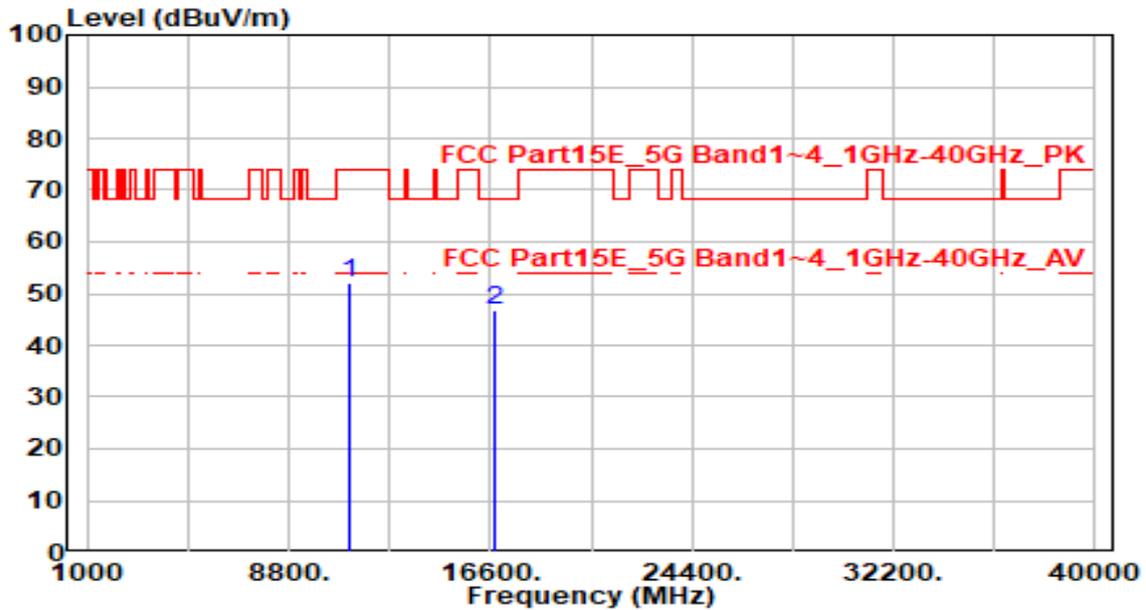


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	47.01	5.00	52.00	-22.00	74.00	200	35	Peak
2	* 16740.000	39.43	7.19	46.62	-21.58	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

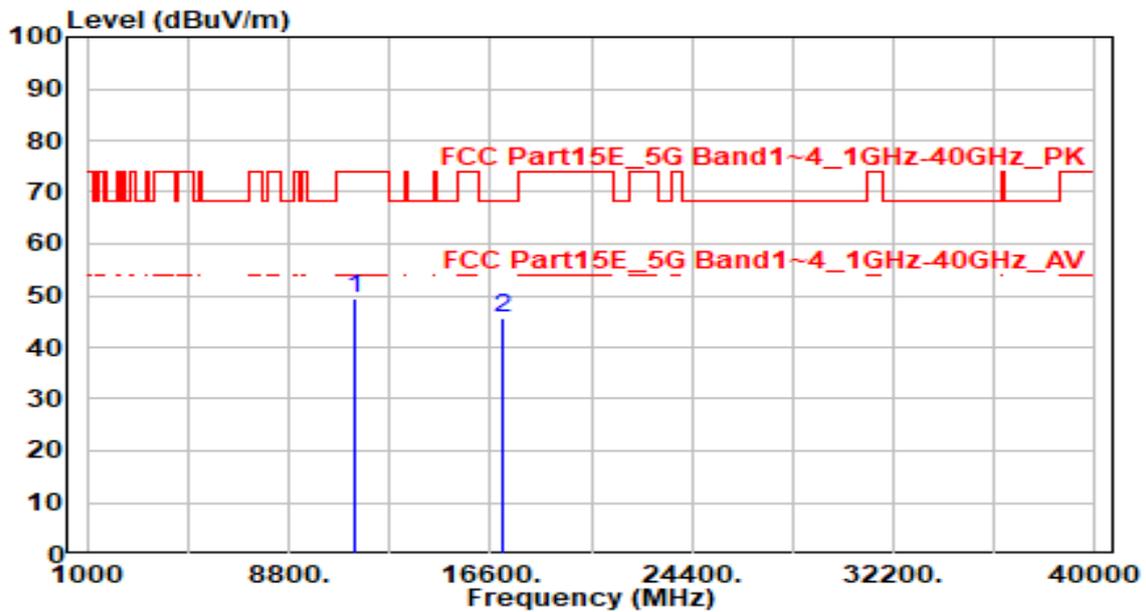


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	44.21	5.18	49.39	-24.61	74.00	300	185	Peak
2	* 17100.000	40.31	5.41	45.72	-22.48	68.20	255	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

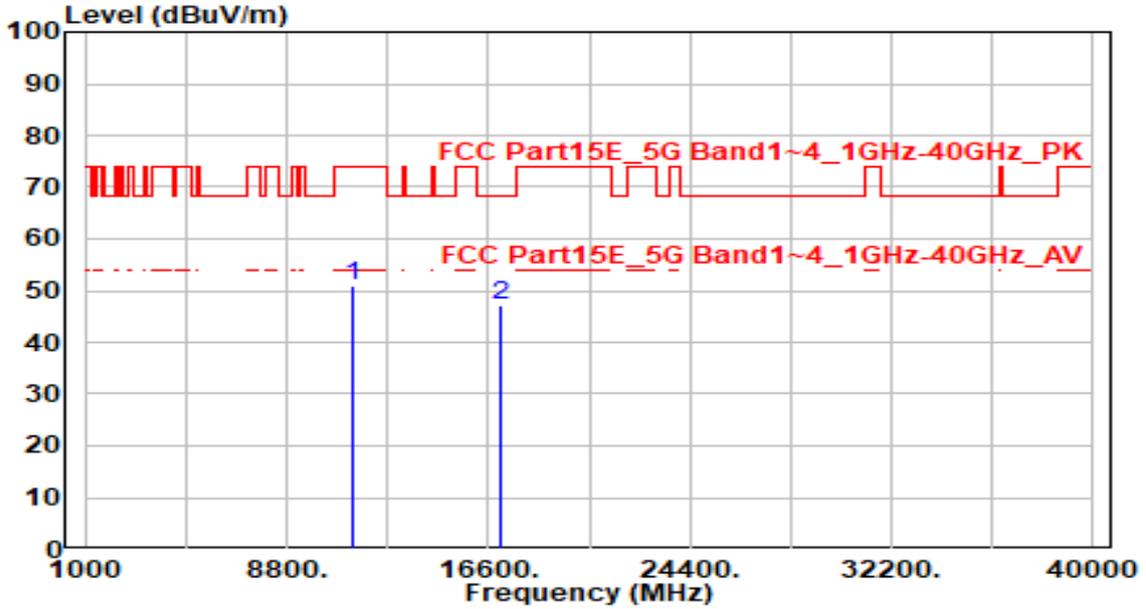


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	45.74	5.18	50.92	-23.08	74.00	200	360	Peak
2	* 17100.000	41.90	5.41	47.31	-20.89	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

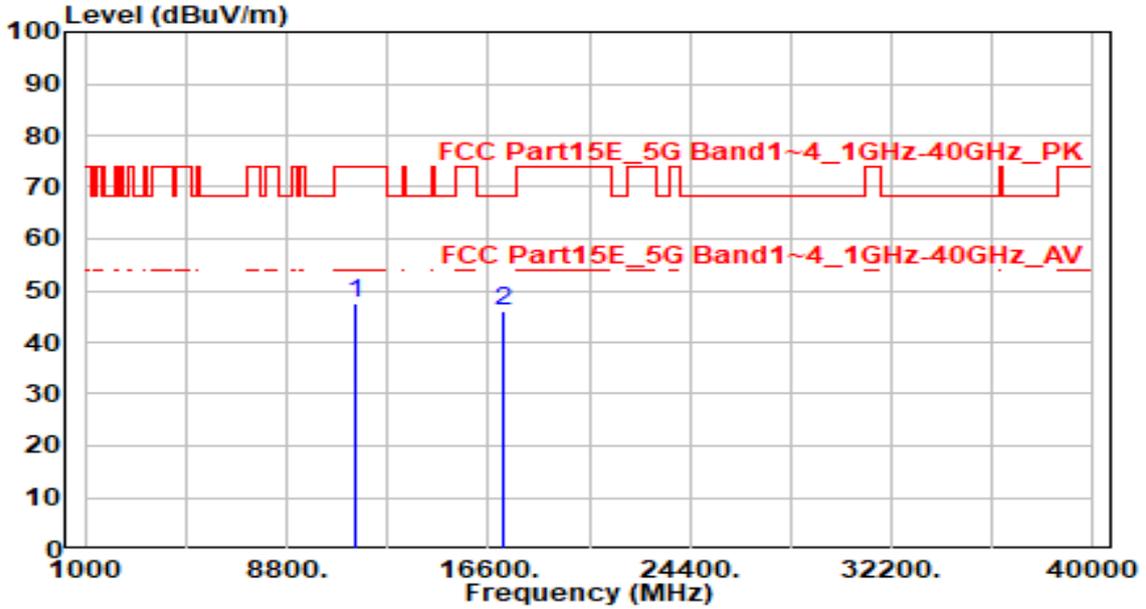


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.25	5.17	47.42	-26.58	74.00	300	275	Peak
2	* 17160.000	40.73	5.28	46.02	-22.18	68.20	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

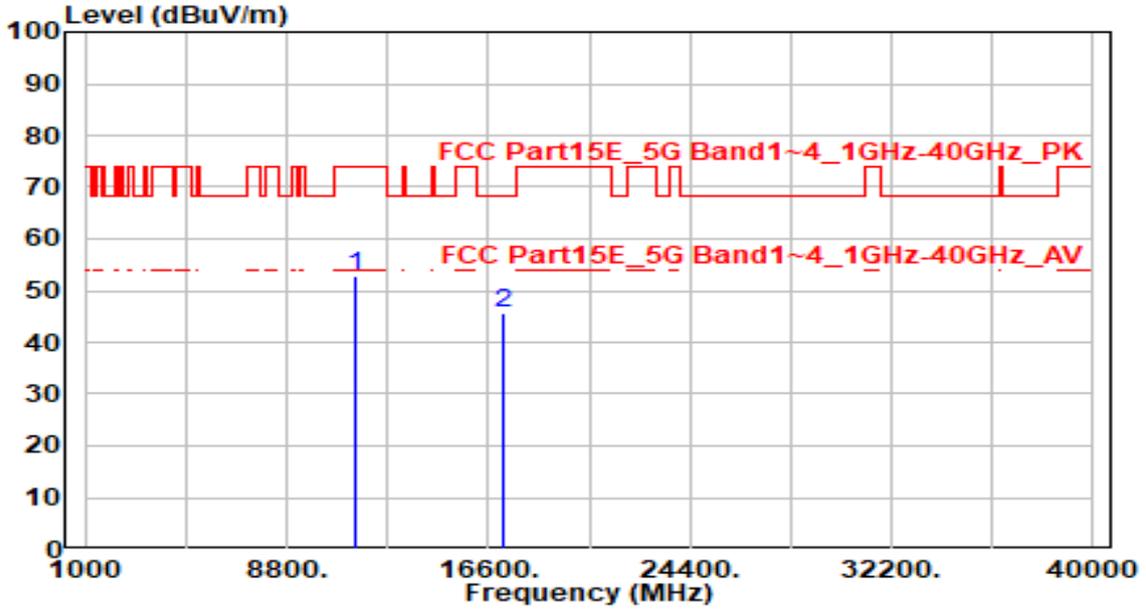


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11440.000	47.58	5.17	52.75	-21.25	74.00	300	355	Peak
2	17160.000	40.21	5.28	45.50	-22.70	68.20	300	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

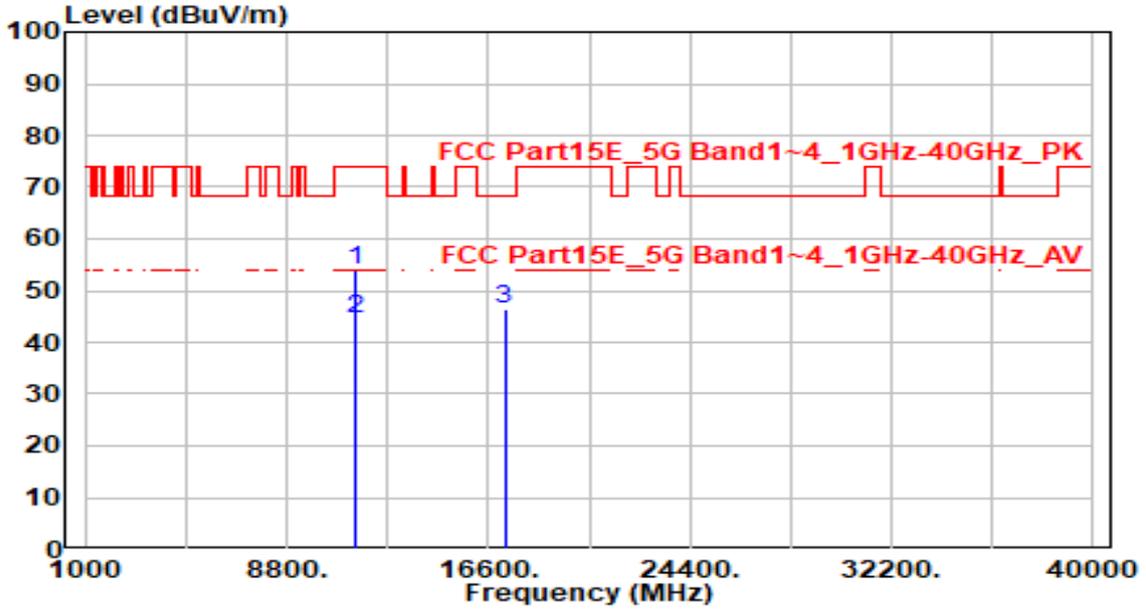


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	48.93	5.15	54.09	-19.91	74.00	210	190	Peak
2	* 11490.000	39.44	5.15	44.59	-9.41	54.00	210	190	Average
3	17235.000	41.39	5.17	46.56	-21.64	68.20	300	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

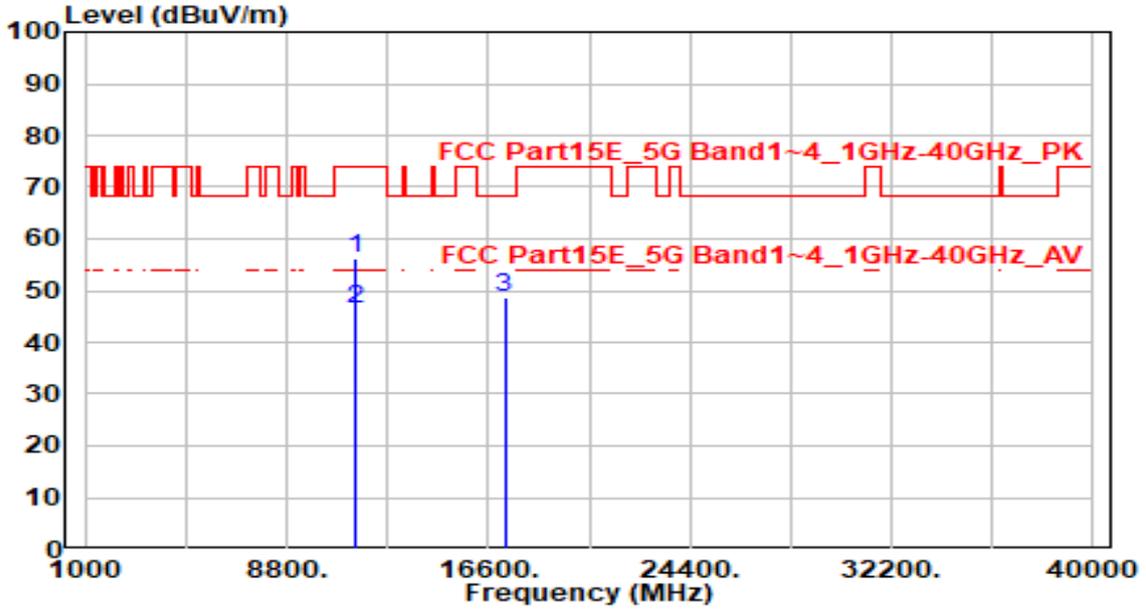


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	51.18	5.15	56.33	-17.67	74.00	280	195	Peak
2	* 11490.000	41.14	5.15	46.29	-7.71	54.00	280	195	Average
3	17235.000	43.62	5.17	48.79	-19.41	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

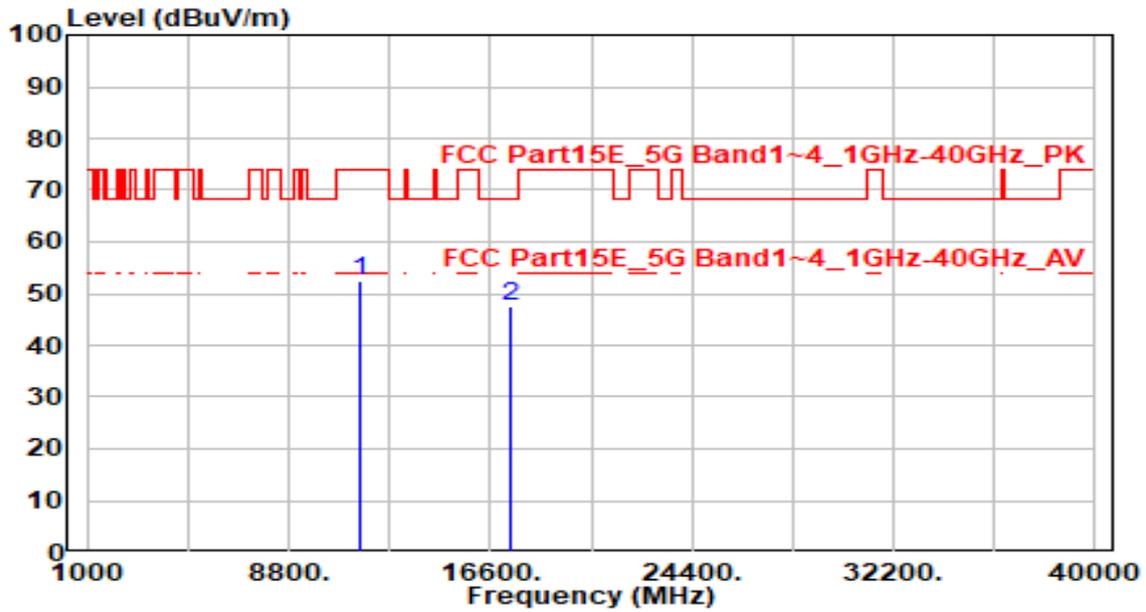


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	47.18	5.14	52.31	-21.69	74.00	300	175	Peak
2	* 17355.000	42.37	5.09	47.46	-20.74	68.20	300	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

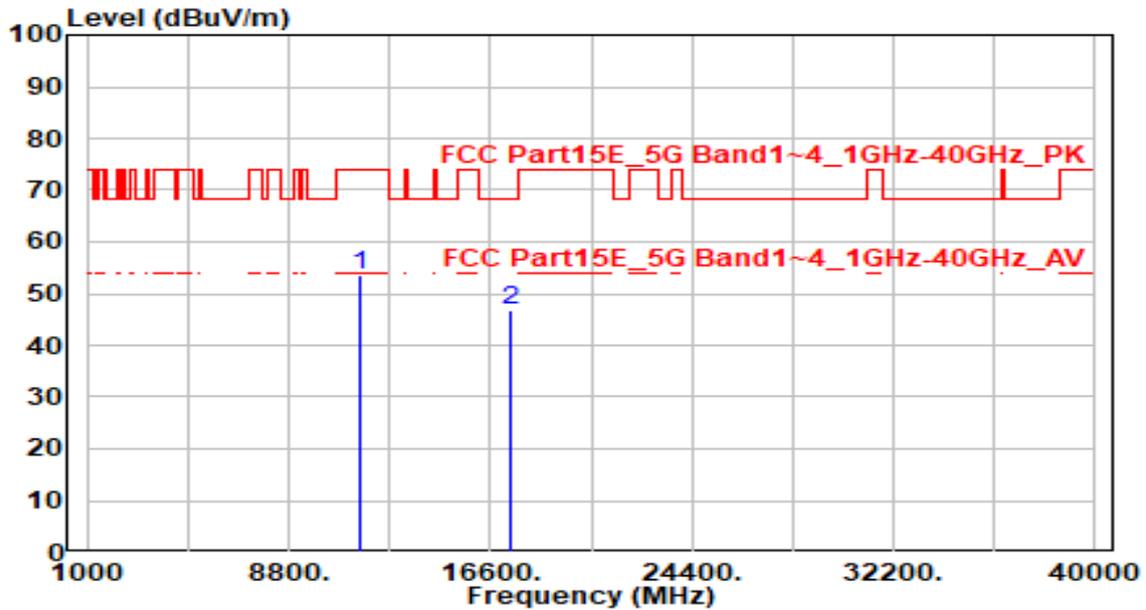


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11570.000	48.27	5.14	53.40	-20.60	74.00	200	190	Peak
2	17355.000	41.66	5.09	46.75	-21.45	68.20	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

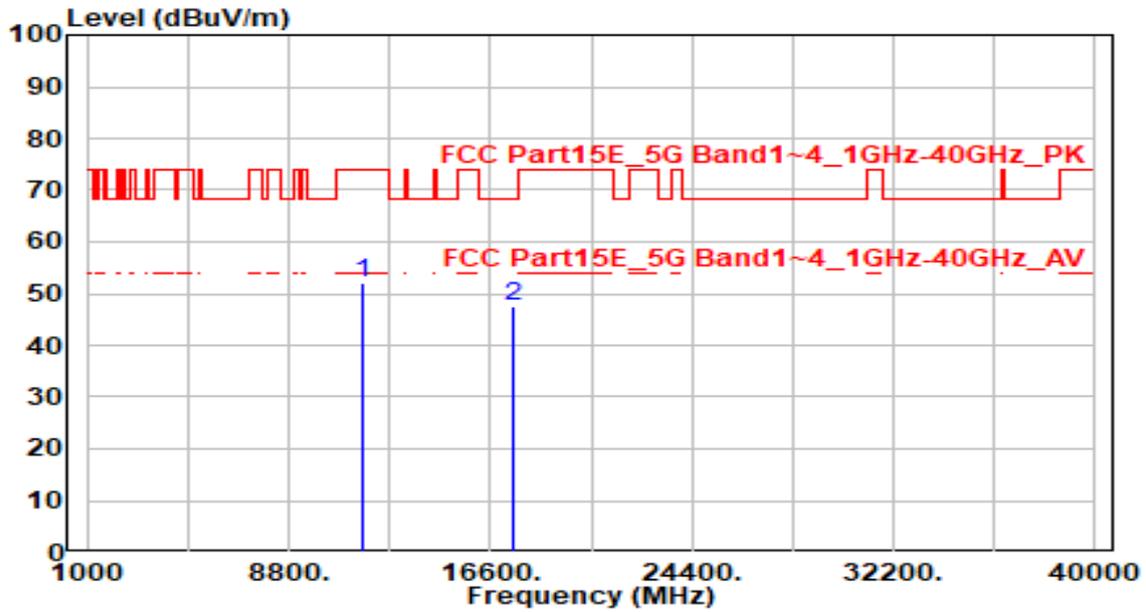


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	46.97	5.12	52.09	-21.91	74.00	200	195	Peak
2	* 17475.000	42.29	5.10	47.39	-20.81	68.20	300	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

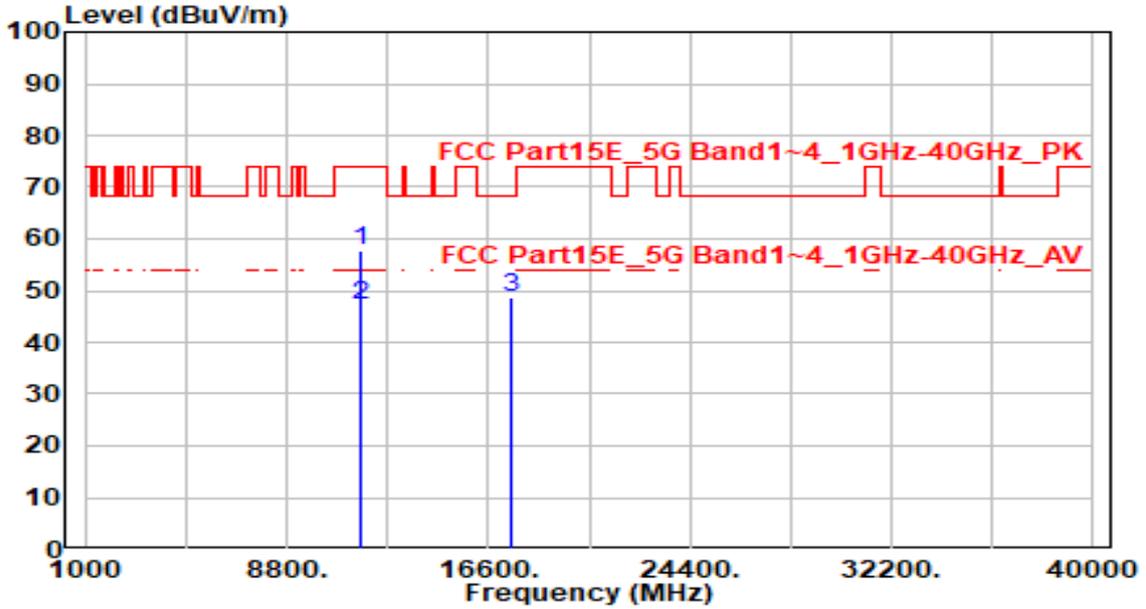


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	52.55	5.12	57.67	-16.33	74.00	190	200	Peak
2	* 11650.000	42.00	5.12	47.12	-6.88	54.00	190	200	Average
3	17475.000	43.67	5.10	48.77	-19.43	68.20	200	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

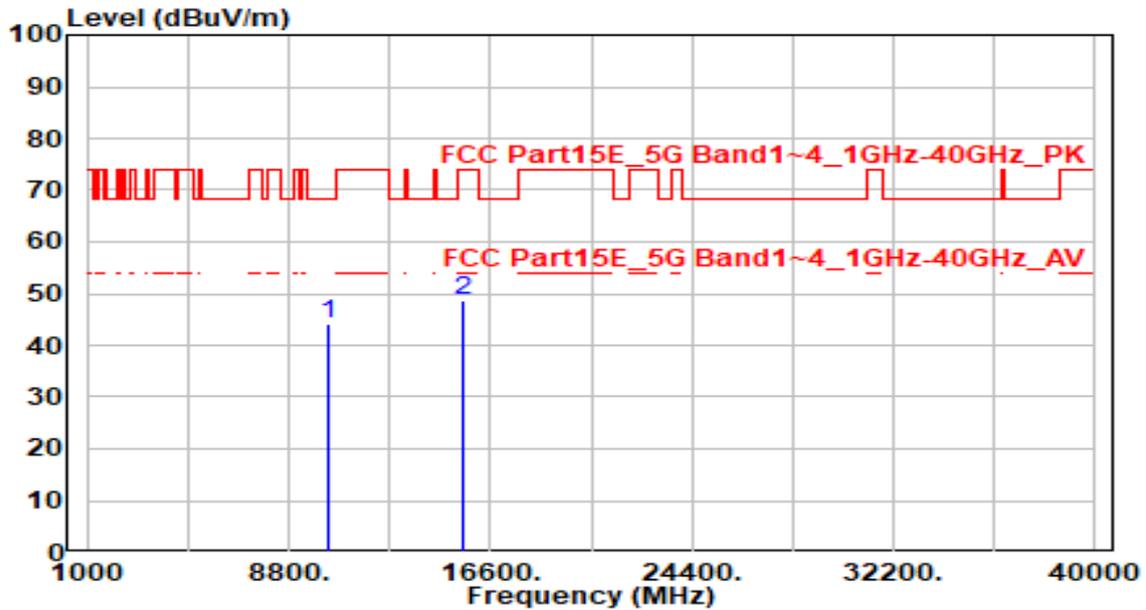


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	39.36	4.62	43.98	-24.22	68.20	200	165	Peak
2	15540.000	42.89	5.91	48.80	-25.20	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

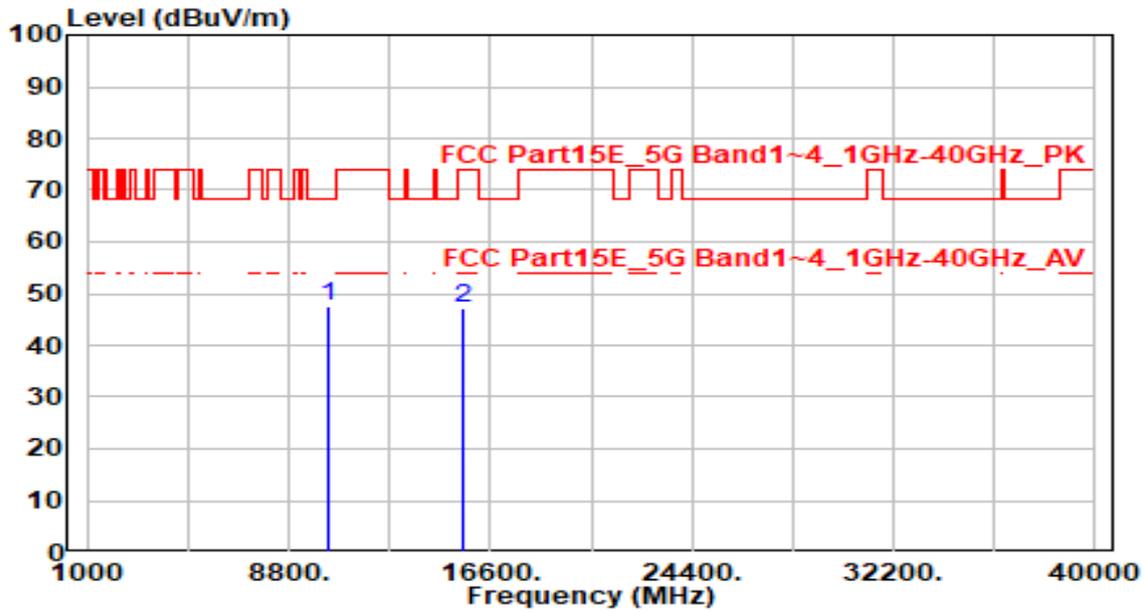


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.83	4.62	47.45	-20.75	68.20	200	345	Peak
2	15540.000	41.37	5.91	47.29	-26.71	74.00	300	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

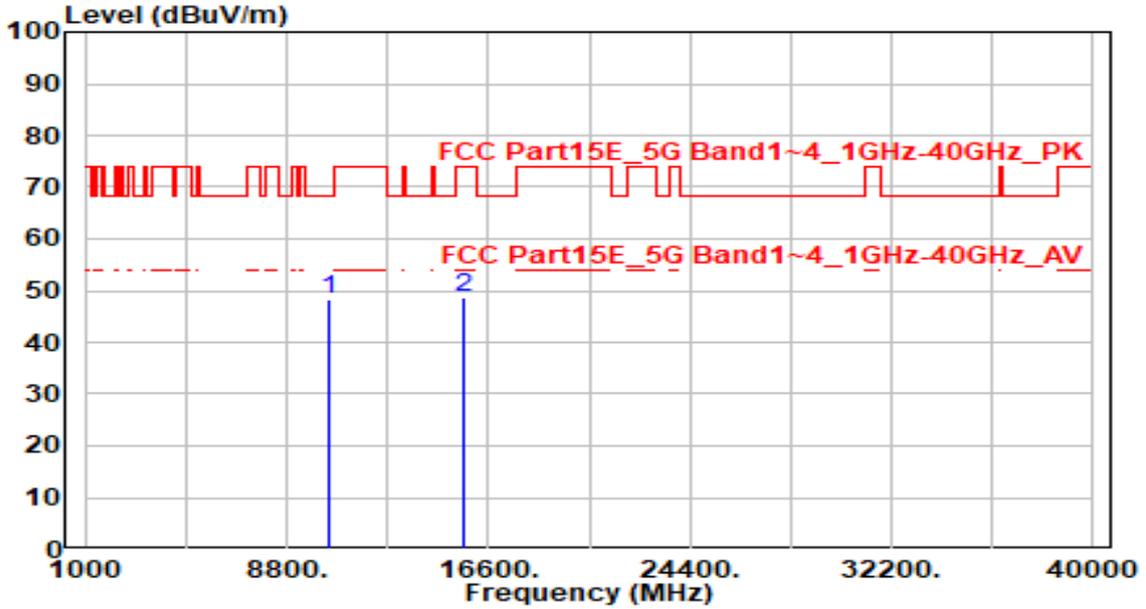


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	43.56	4.62	48.18	-20.02	68.20	200	180	Peak
2	15660.000	42.55	5.98	48.53	-25.47	74.00	200	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

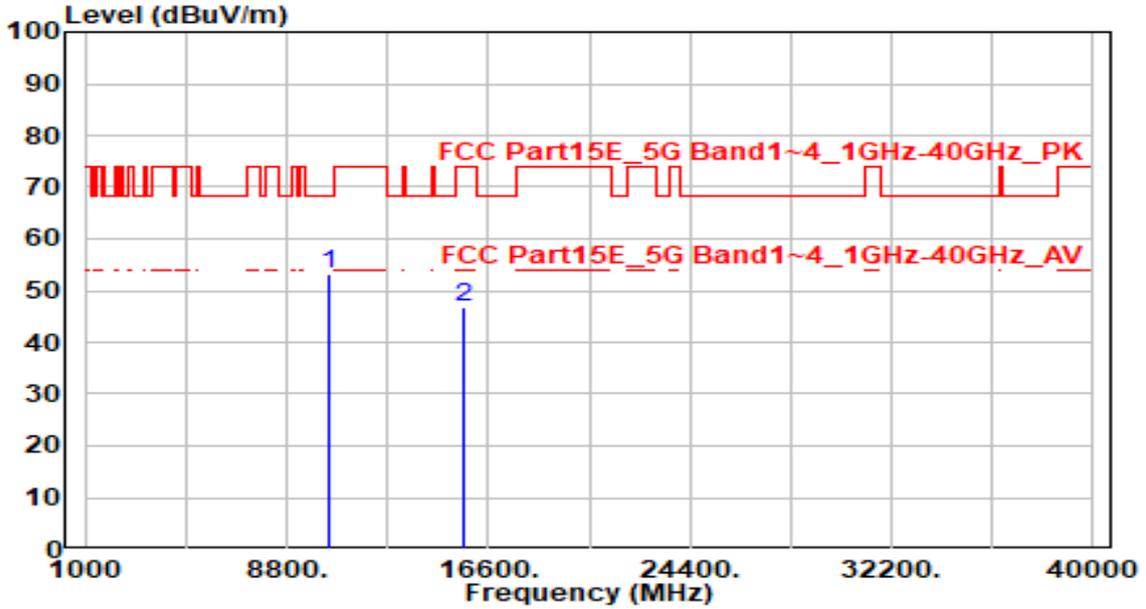


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	48.73	4.62	53.35	-14.85	68.20	200	50	Peak
2	15660.000	40.89	5.98	46.86	-27.14	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

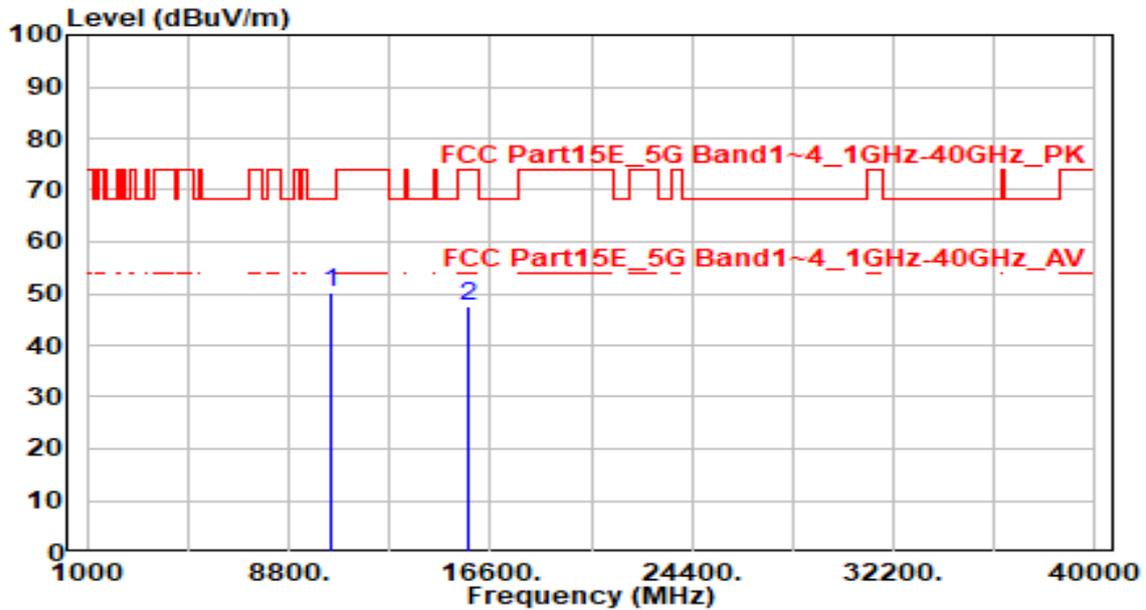


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	45.66	4.63	50.29	-17.91	68.20	200	175	Peak
2		41.36	6.03	47.38	-26.62	74.00	300	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

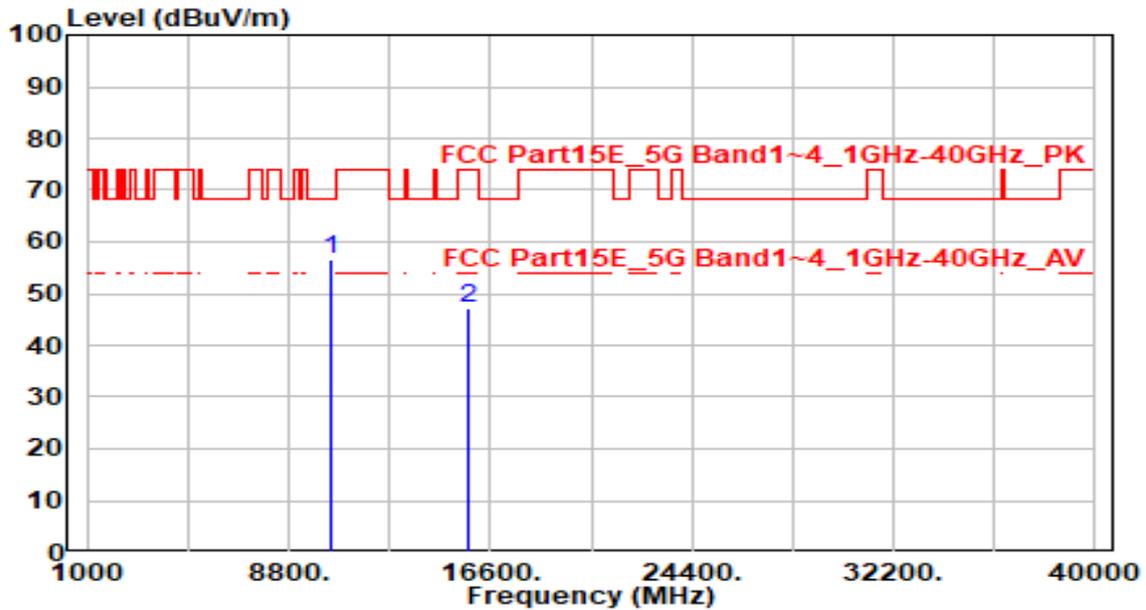


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	51.81	4.63	56.44	-11.76	68.20	200	130	Peak
2	15720.000	41.16	6.03	47.19	-26.81	74.00	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

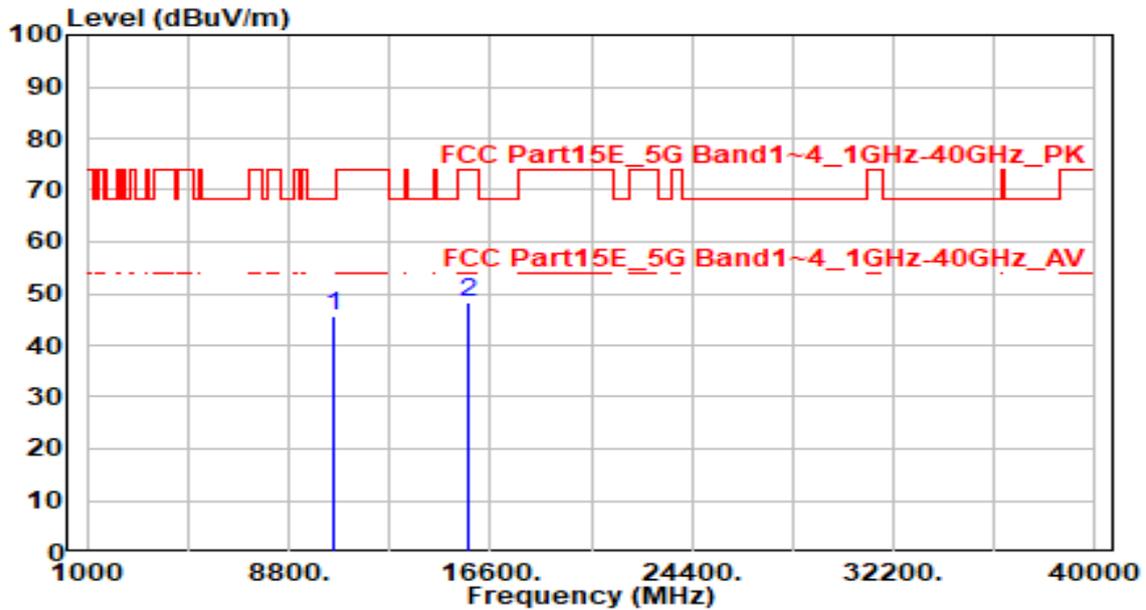


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	41.15	4.64	45.79	-22.41	68.20	300	10	Peak
2	15780.000	42.30	6.08	48.38	-25.62	74.00	215	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

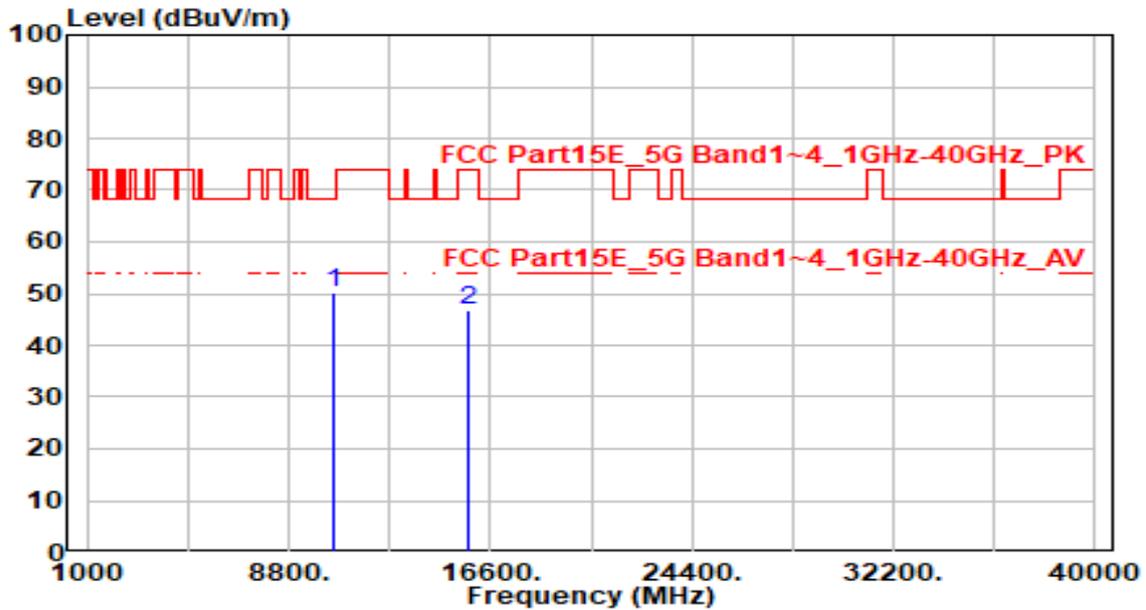


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	45.43	4.64	50.07	-18.13	68.20	200	210	Peak
2	15780.000	40.83	6.08	46.91	-27.09	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

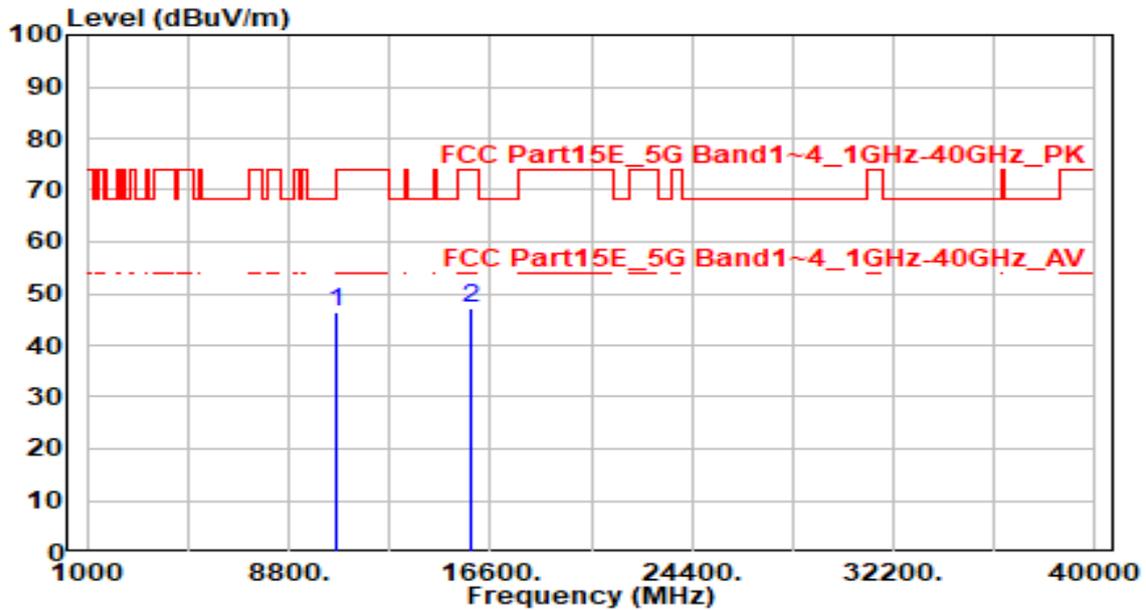


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.65	4.66	46.31	-21.89	68.20	200	180	Peak
2		41.07	6.24	47.31	-26.69	74.00	200	170	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

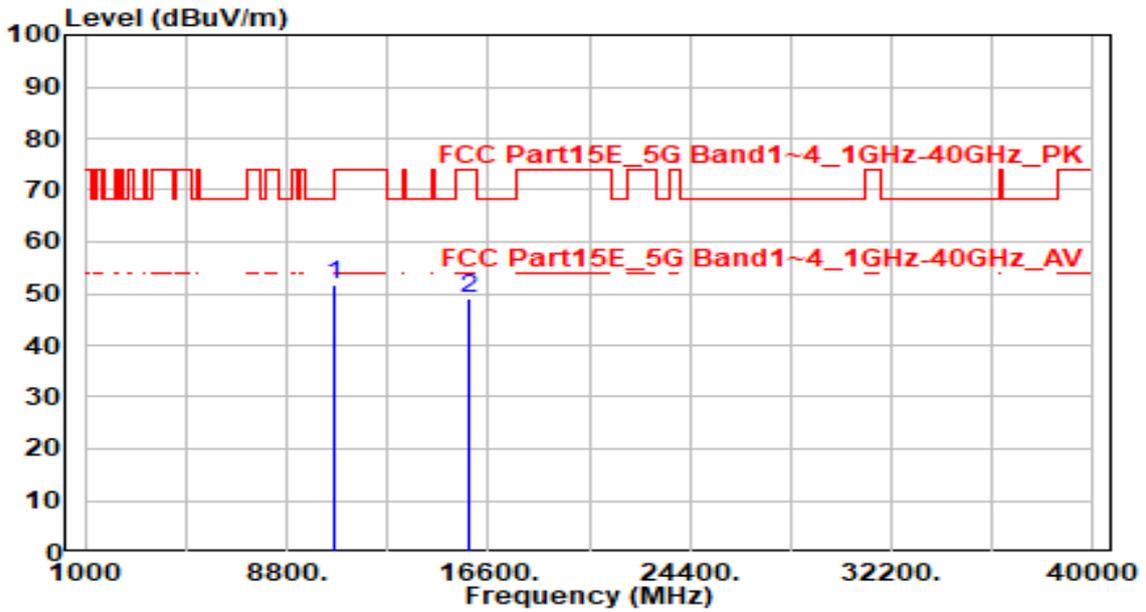


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	46.85	4.66	51.52	-16.68	68.20	200	175	Peak
2	15900.000	42.69	6.24	48.93	-25.07	74.00	200	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

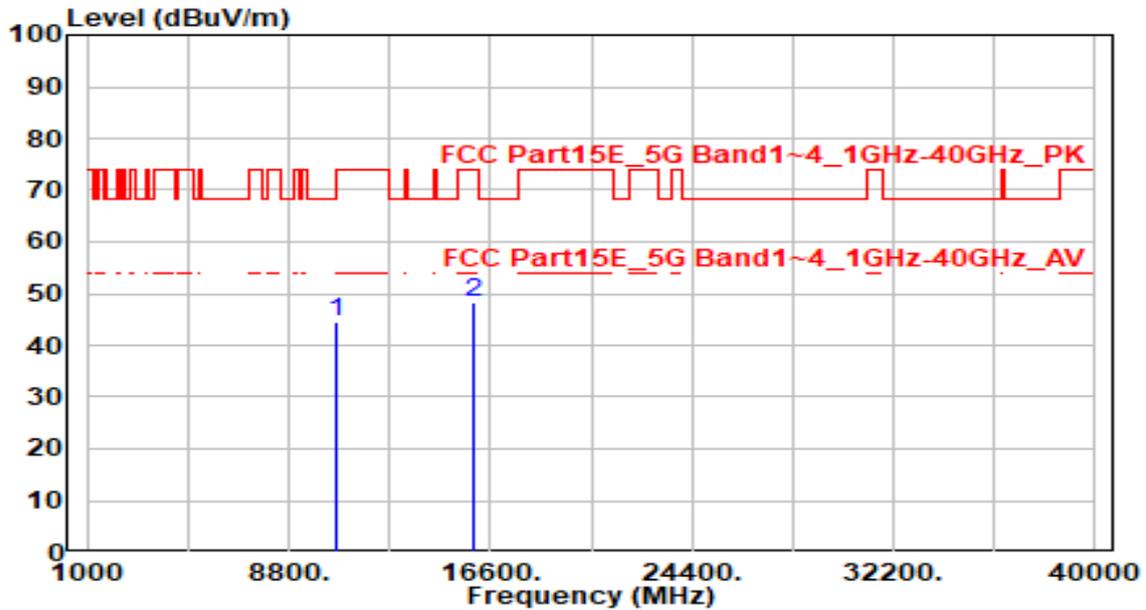


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.77	4.65	44.43	-29.57	74.00	300	90	Peak
2	* 15960.000	41.93	6.32	48.26	-25.74	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

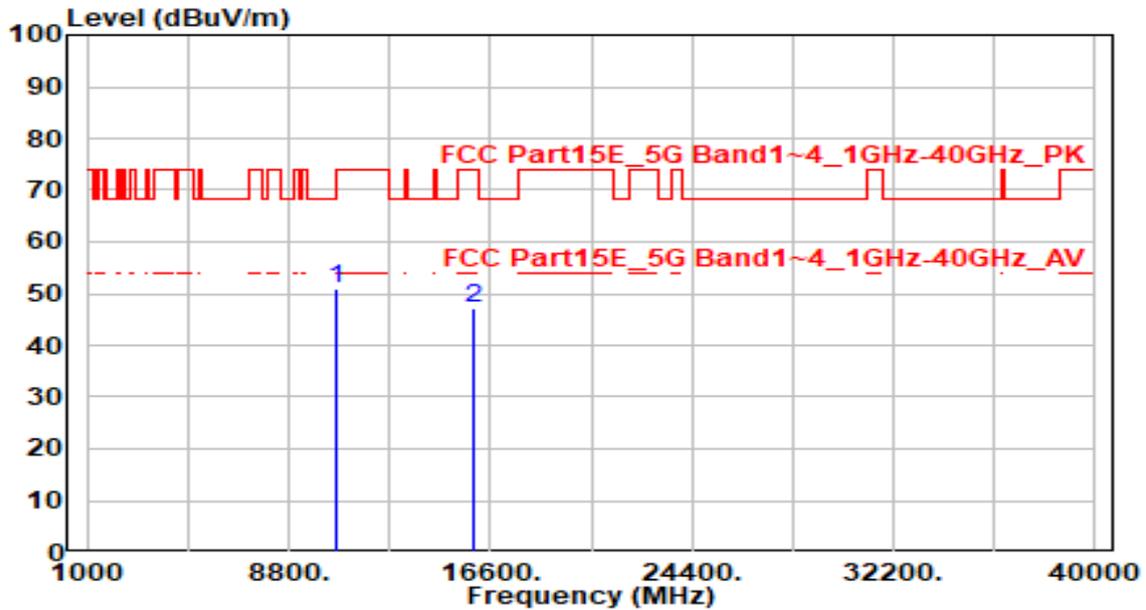


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	46.26	4.65	50.91	-23.09	74.00	200	145	Peak
2		40.72	6.32	47.04	-26.96	74.00	240	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

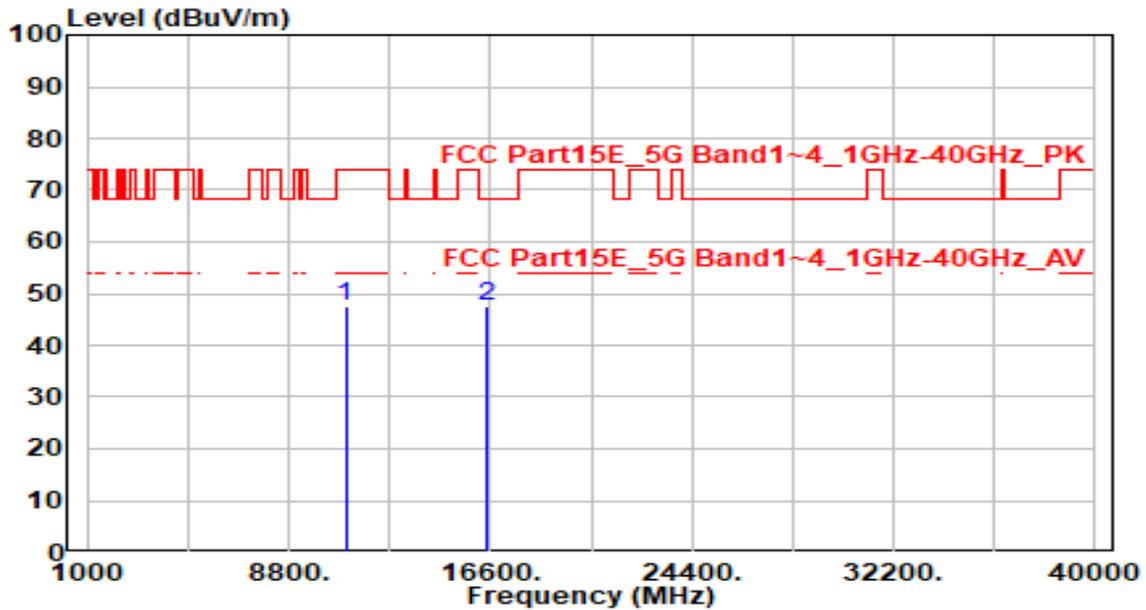


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.83	4.74	47.58	-26.42	74.00	300	360	Peak
2	* 16500.000	40.60	6.86	47.46	-20.74	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

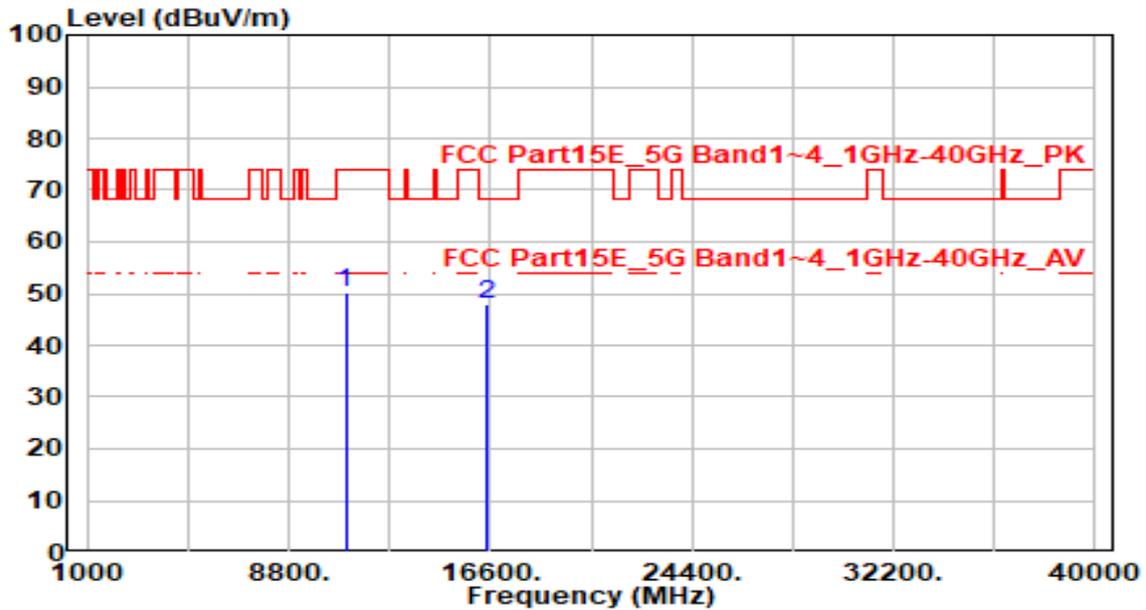


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	45.37	4.74	50.11	-23.89	74.00	300	5	Peak
2	* 16500.000	41.01	6.86	47.87	-20.33	68.20	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

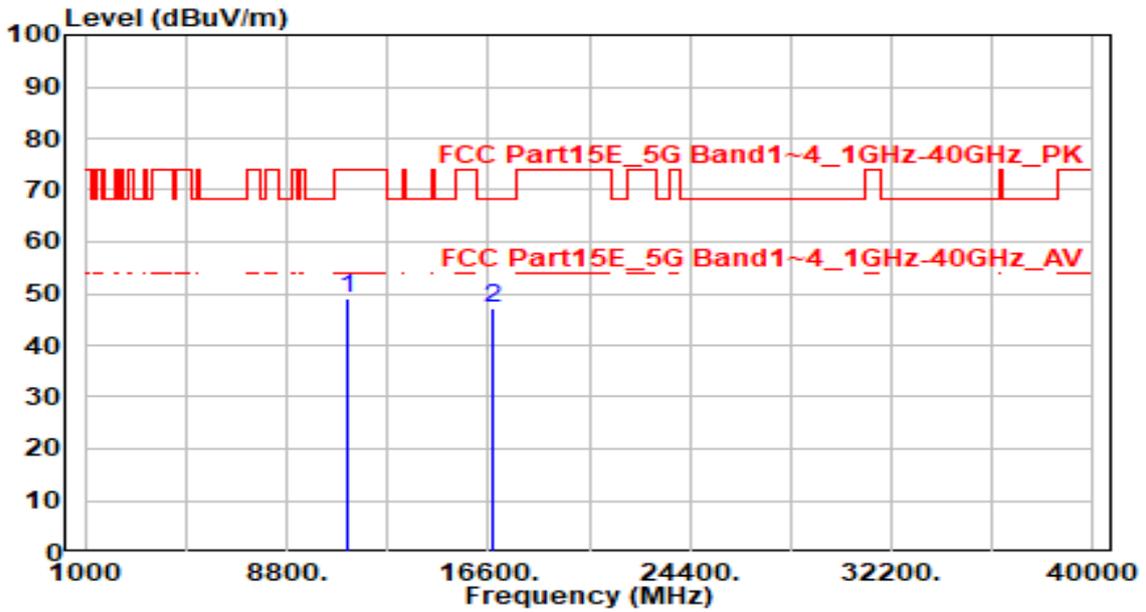


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.96	5.00	48.96	-25.04	74.00	200	215	Peak
2	* 16740.000	40.14	7.19	47.33	-20.87	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

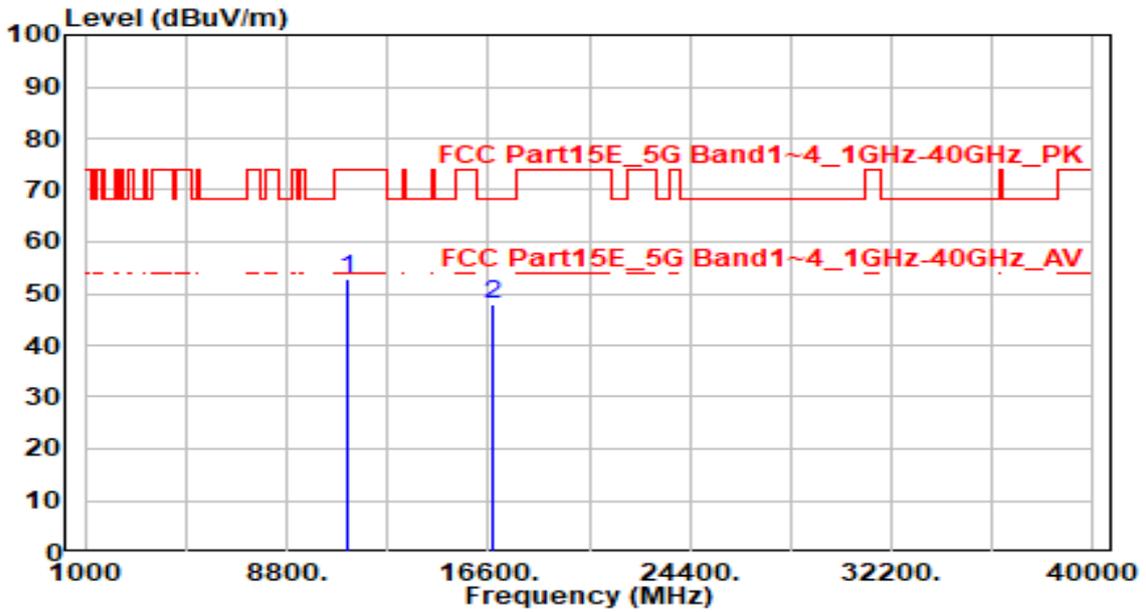


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	47.69	5.00	52.69	-21.31	74.00	300	160	Peak
2	* 16740.000	40.64	7.19	47.82	-20.38	68.20	300	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

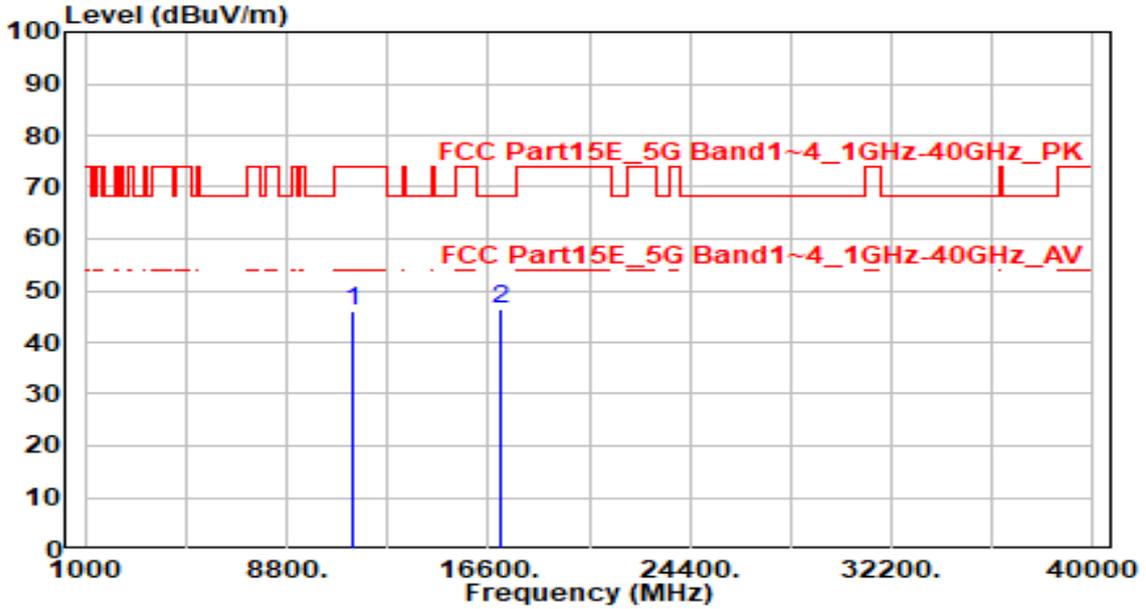


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.02	5.18	46.20	-27.80	74.00	300	0	Peak
2	* 17100.000	41.03	5.41	46.44	-21.76	68.20	300	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

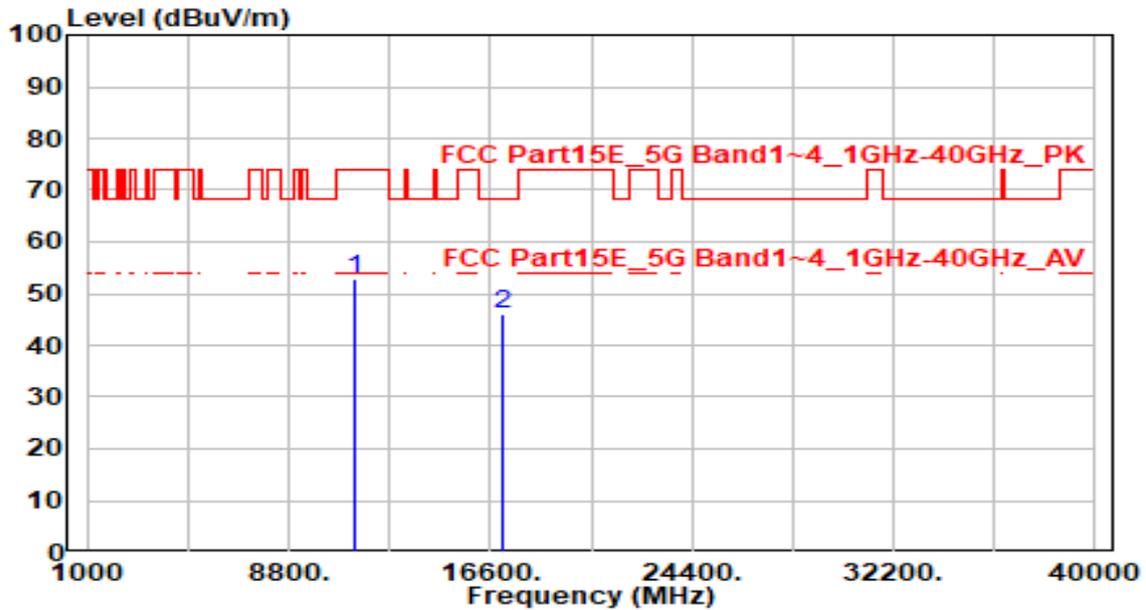


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11400.000	47.54	5.18	52.73	-21.27	74.00	200	165	Peak
2	17100.000	40.55	5.41	45.96	-22.24	68.20	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

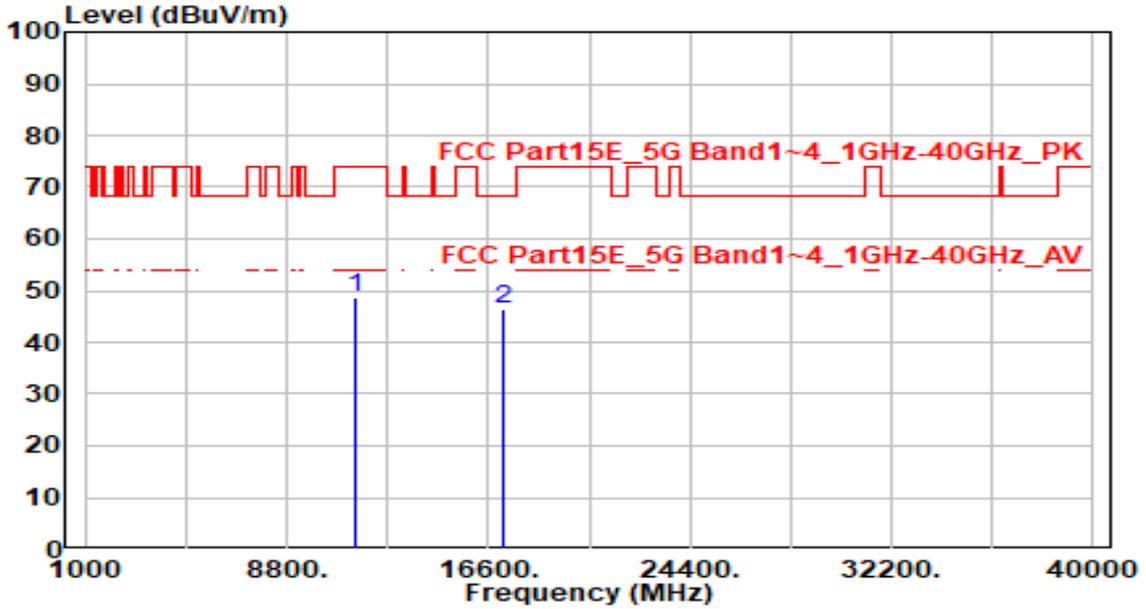


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.60	5.17	48.77	-25.23	74.00	300	265	Peak
2	* 17160.000	41.30	5.28	46.58	-21.62	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

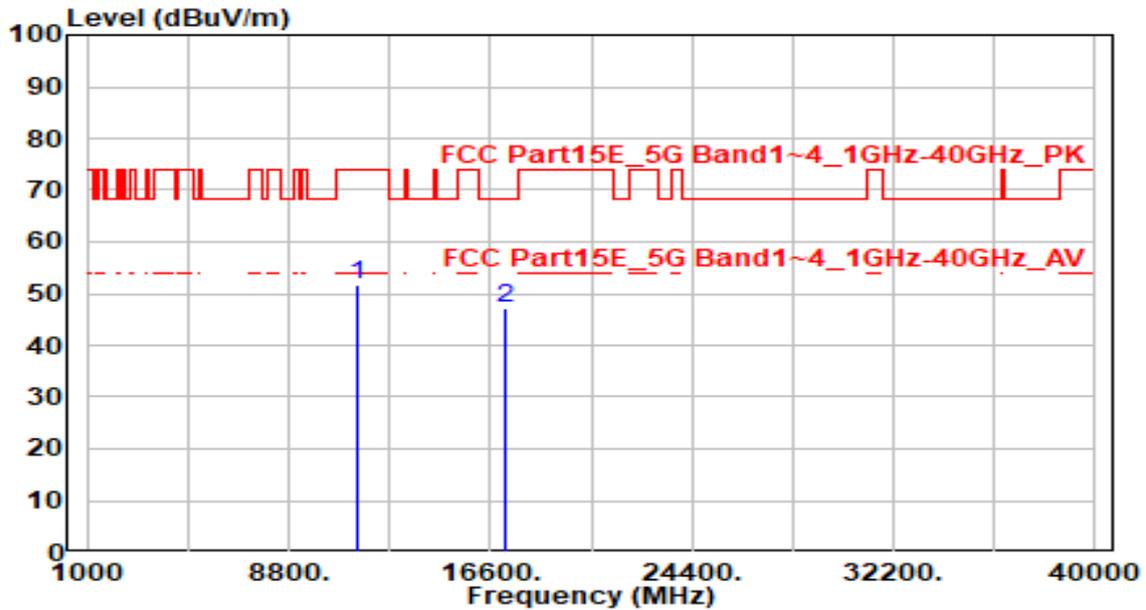


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	46.65	5.17	51.82	-22.18	74.00	200	200	Peak
2	* 17160.000	42.00	5.28	47.28	-20.92	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

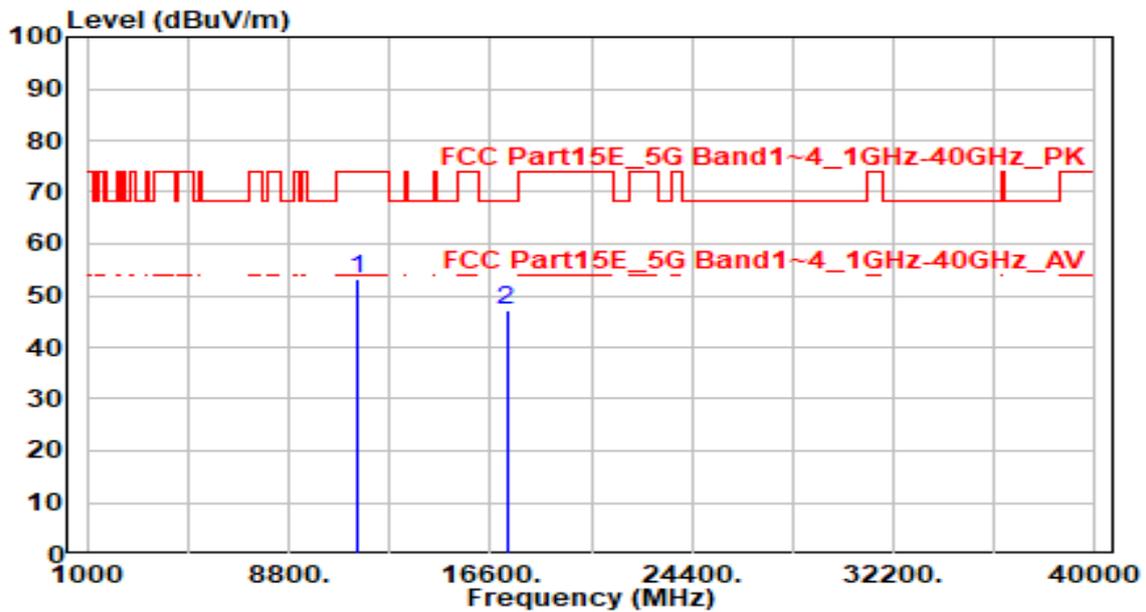


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	48.20	5.15	53.36	-20.64	74.00	200	225	Peak
2	17235.000	42.05	5.17	47.22	-20.98	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

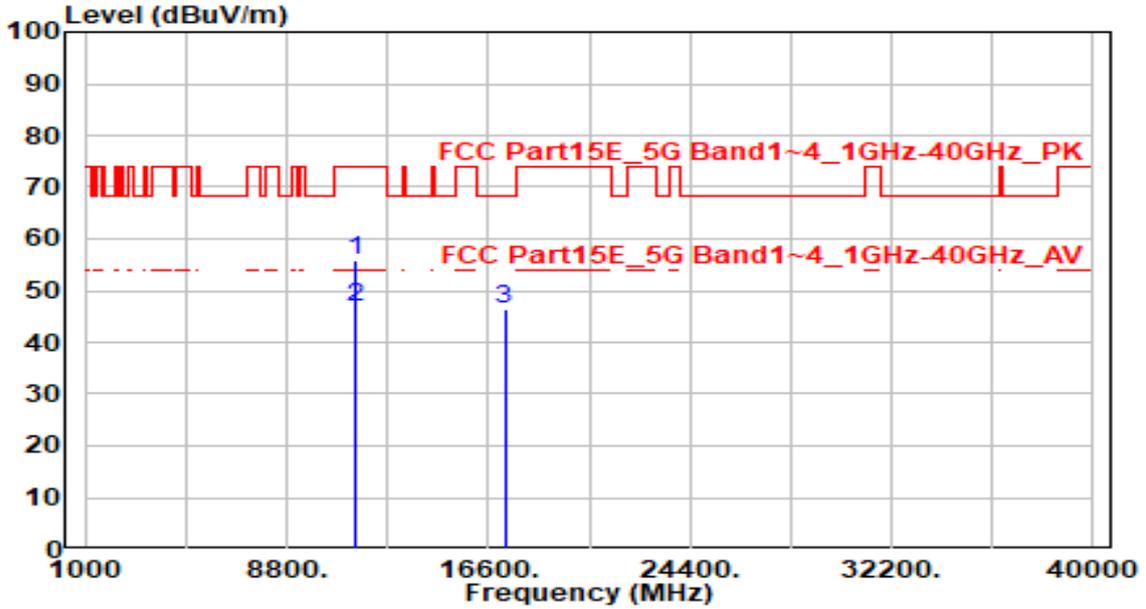


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	50.72	5.15	55.87	-18.13	74.00	200	200	Peak
2	* 11490.000	41.78	5.15	46.93	-7.07	54.00	200	200	Average
3	17235.000	41.24	5.17	46.41	-21.79	68.20	300	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

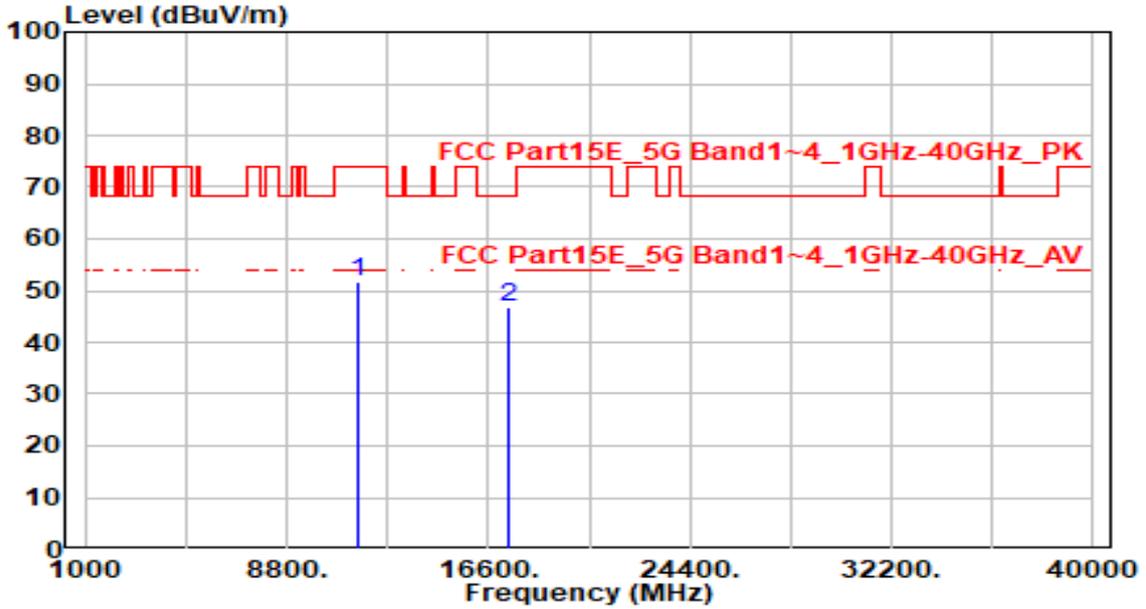


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.67	5.14	51.80	-22.20	74.00	200	210	Peak
2	* 17355.000	41.73	5.09	46.82	-21.38	68.20	200	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

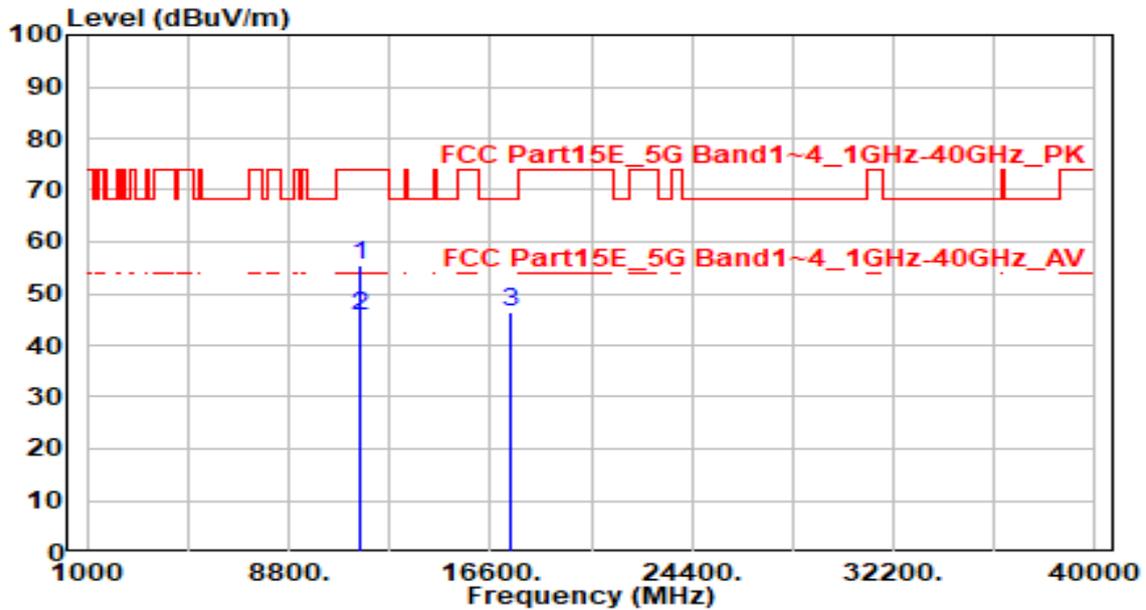


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11570.000	50.43	5.14	55.57	-18.43	74.00	230	165	Peak
2	* 11570.000	40.62	5.14	45.76	-8.24	54.00	230	165	Average
3	17355.000	41.22	5.09	46.31	-21.89	68.20	285	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

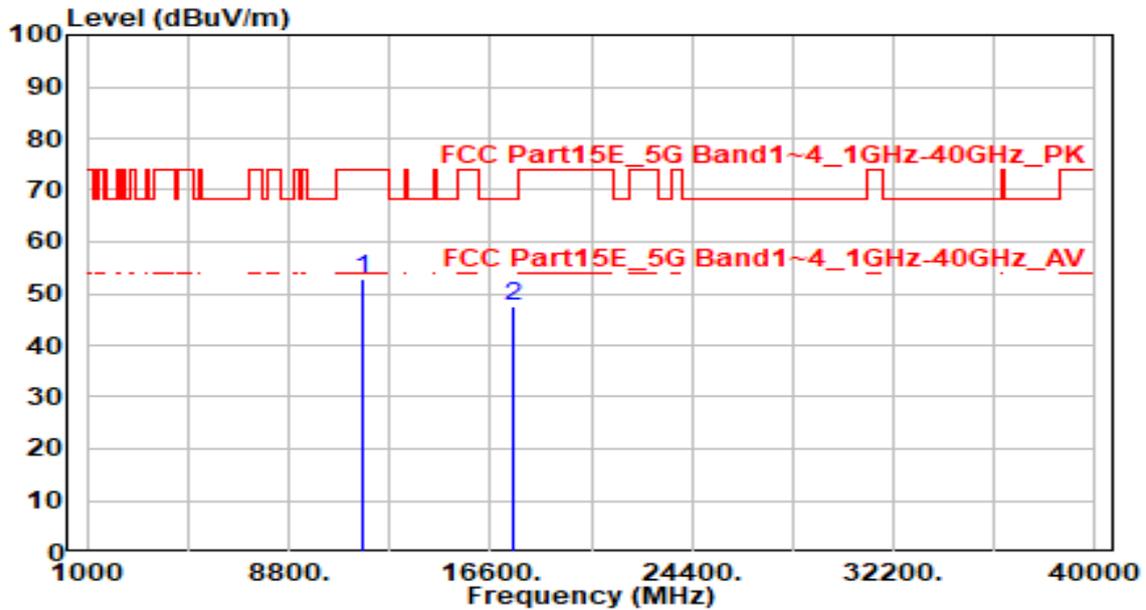


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	47.55	5.12	52.67	-21.33	74.00	200	230	Peak
2	* 17475.000	42.53	5.10	47.63	-20.57	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

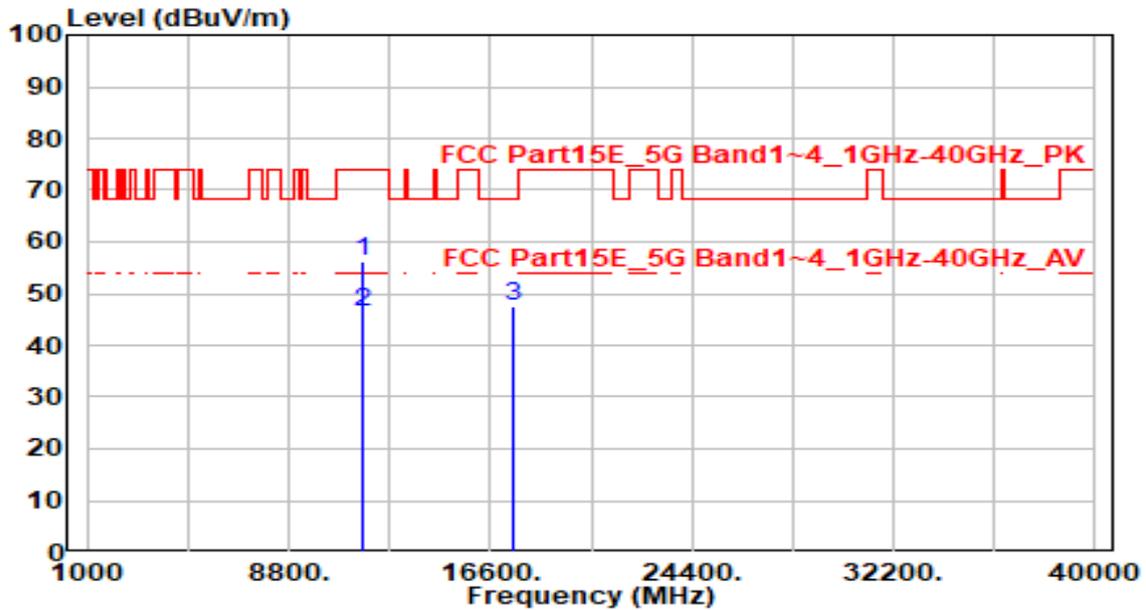


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	51.28	5.12	56.40	-17.60	74.00	205	200	Peak
2	* 11650.000	41.41	5.12	46.53	-7.47	54.00	205	200	Average
3	17475.000	42.42	5.10	47.51	-20.69	68.20	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

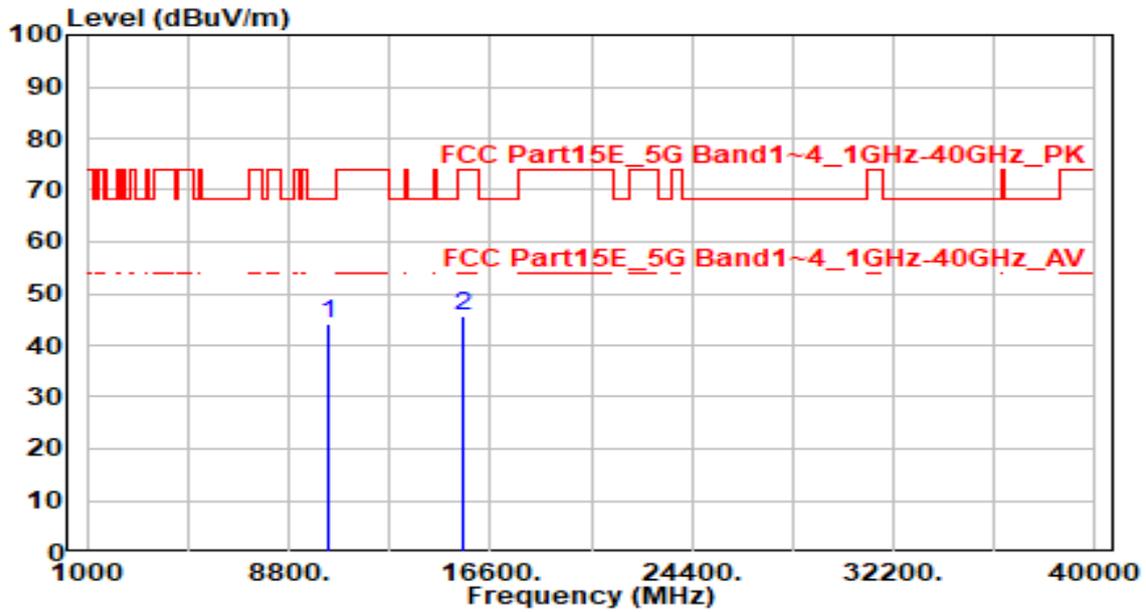


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	39.68	4.61	44.30	-23.90	68.20	300	260	Peak
2	15570.000	39.72	5.92	45.64	-28.36	74.00	300	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

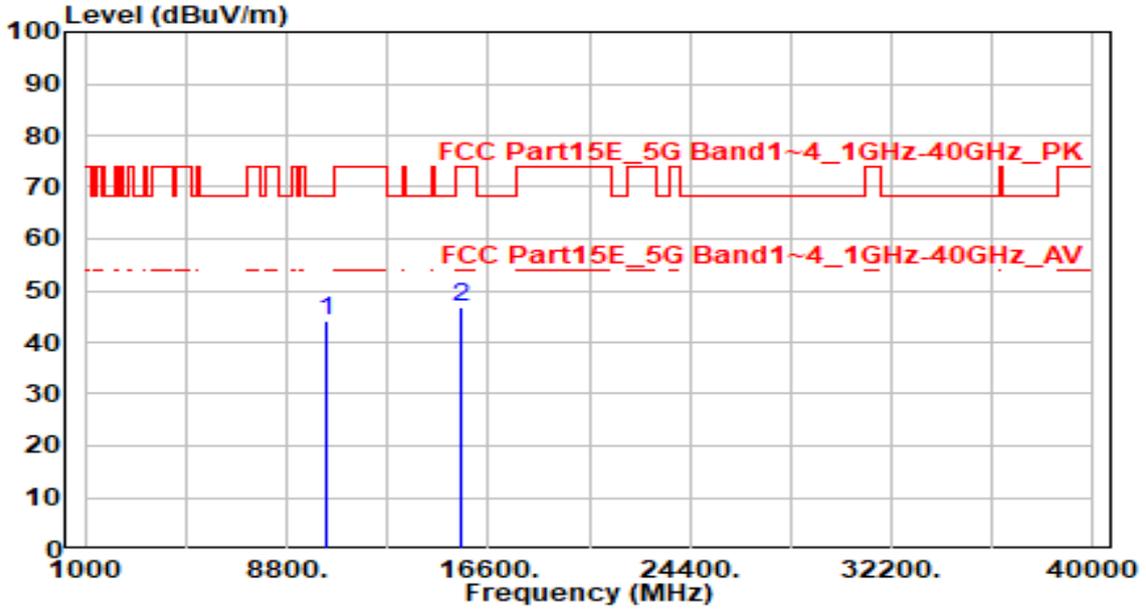


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	39.47	4.61	44.09	-24.11	68.20	200	85	Peak
2	15570.000	40.83	5.92	46.75	-27.25	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

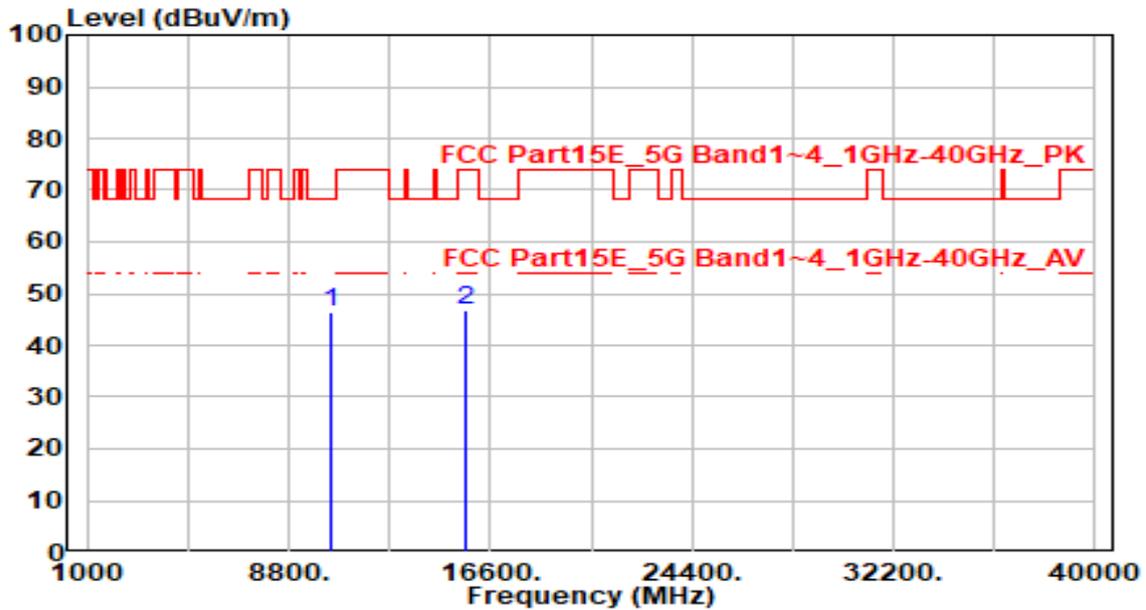


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	41.89	4.63	46.51	-21.69	68.20	300	0	Peak
2	15690.000	40.75	6.00	46.75	-27.25	74.00	300	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

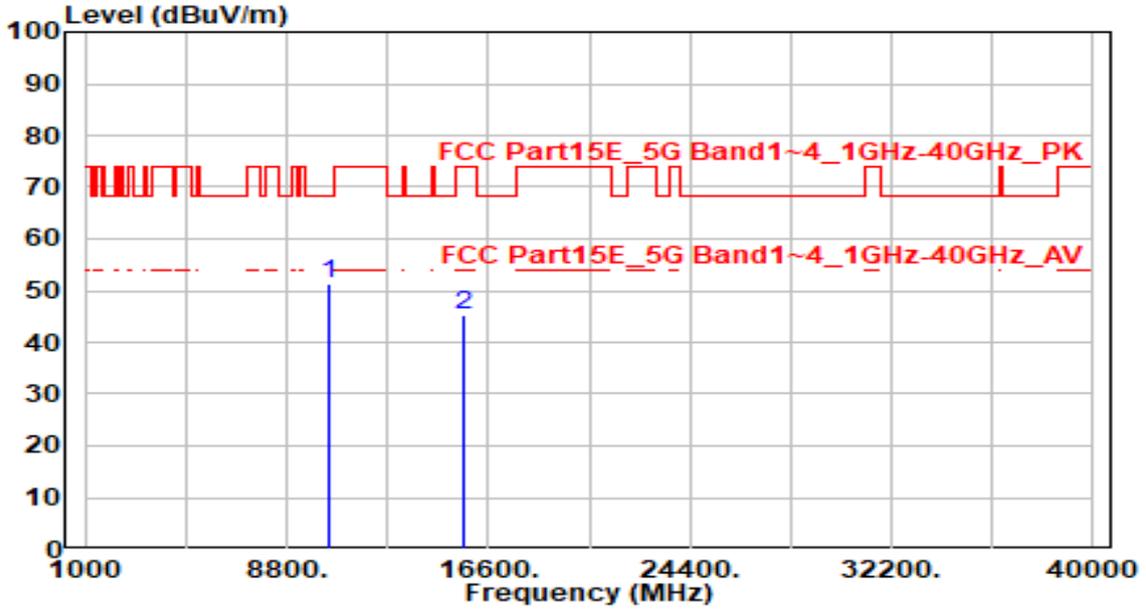


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	46.81	4.63	51.43	-16.77	68.20	200	210	Peak
2	15690.000	39.46	6.00	45.47	-28.53	74.00	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

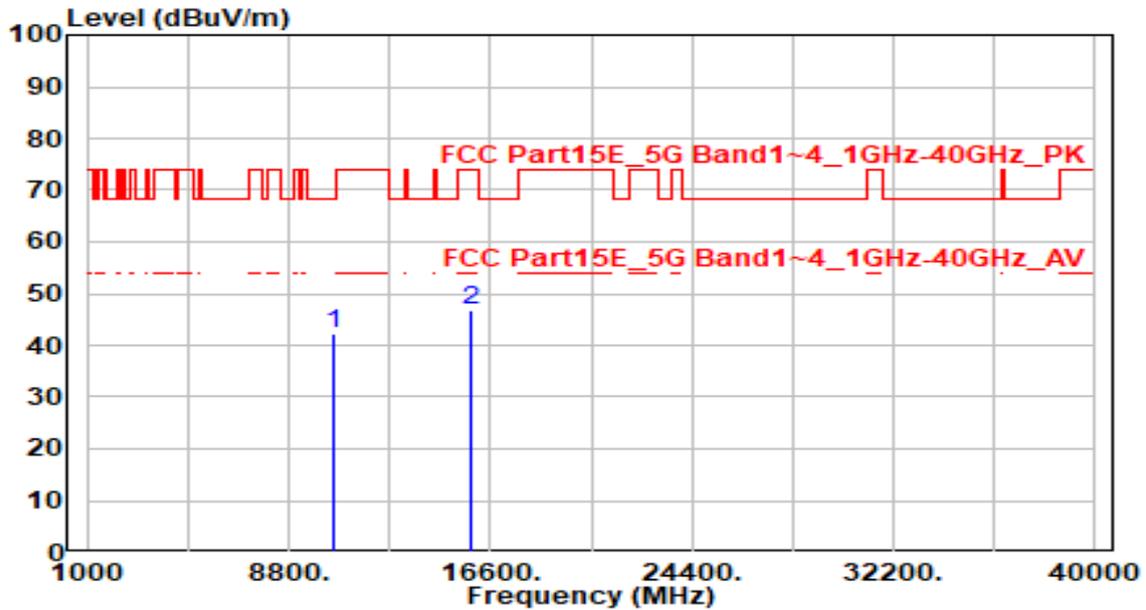


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	37.49	4.65	42.14	-26.06	68.20	295	0	Peak
2	15810.000	40.63	6.11	46.74	-27.26	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

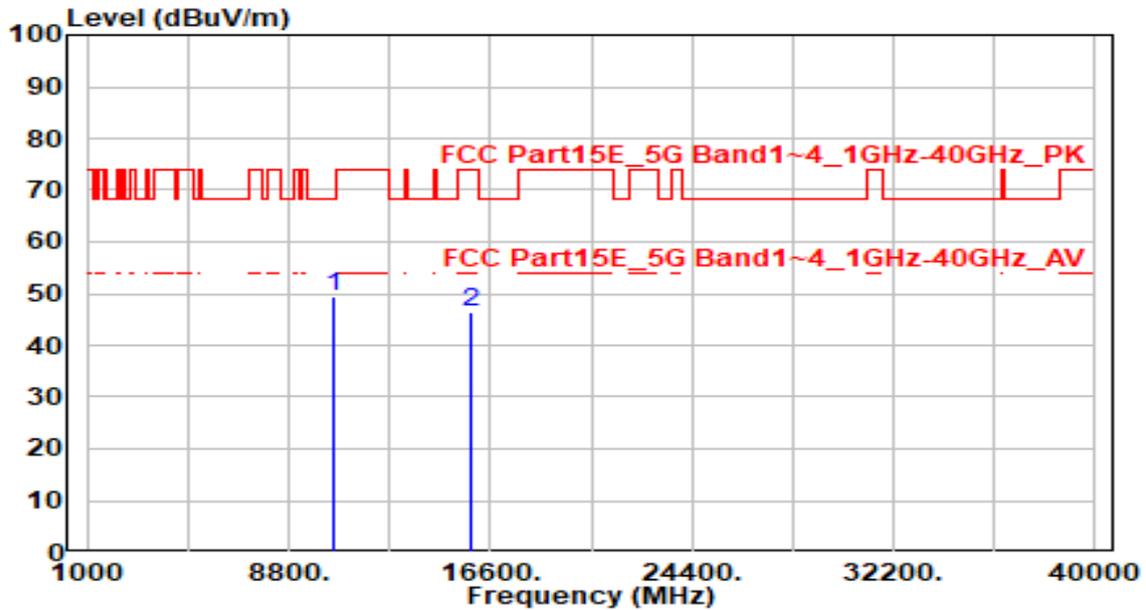


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	44.76	4.65	49.41	-18.79	68.20	200	115	Peak
2	15810.000	40.26	6.11	46.37	-27.63	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

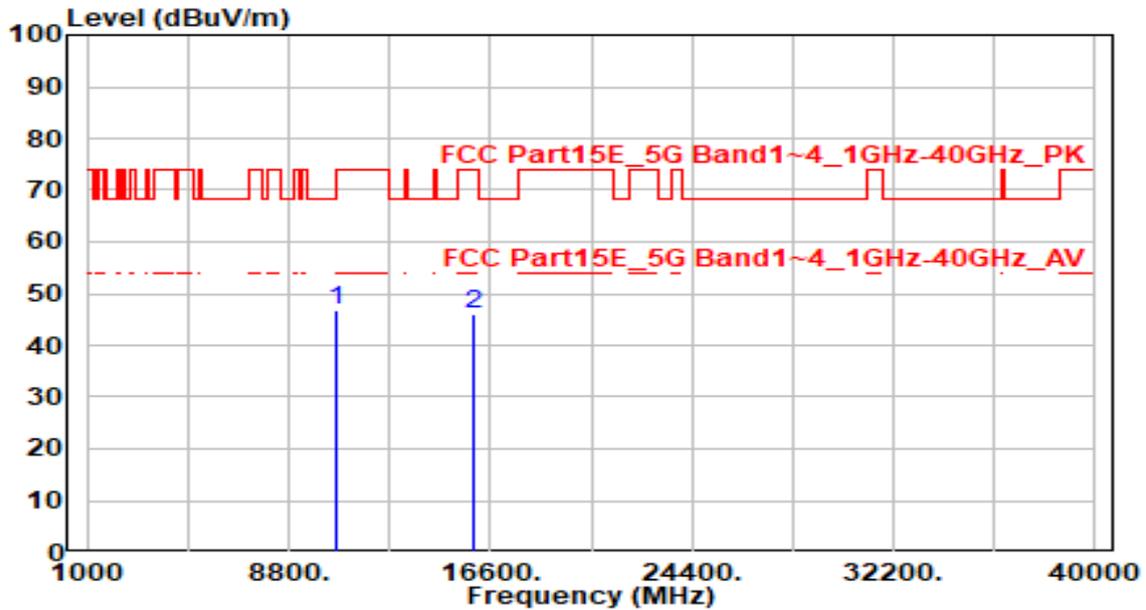


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.96	4.66	46.61	-27.39	74.00	300	360	Peak
2		39.75	6.28	46.03	-27.97	74.00	205	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

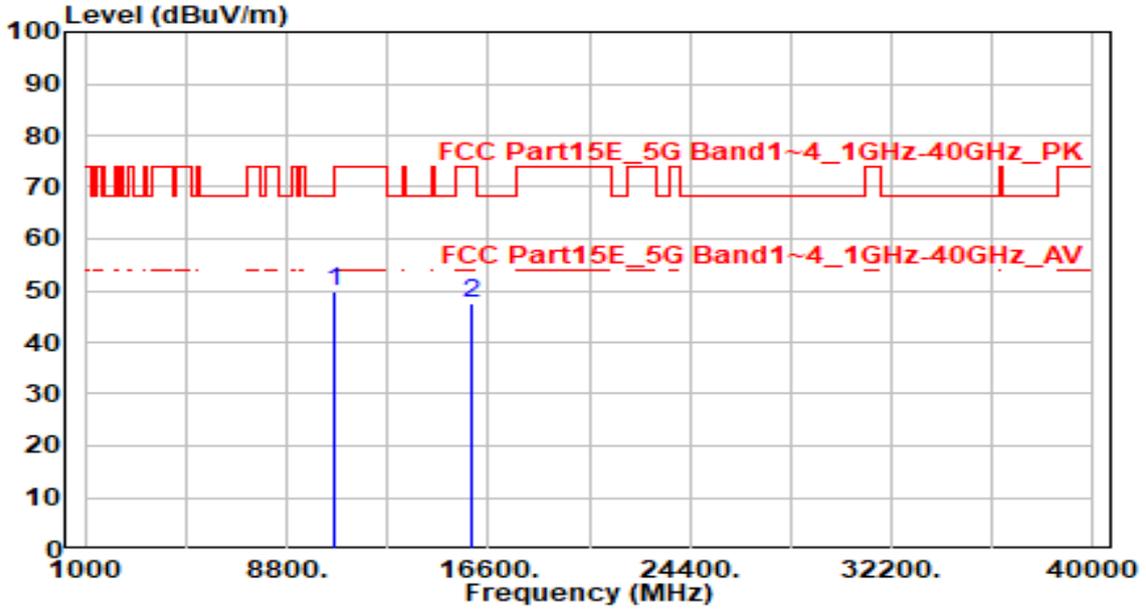


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10620.000	45.15	4.66	49.81	-24.19	74.00	200	190	Peak
2	15930.000	41.14	6.28	47.42	-26.58	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

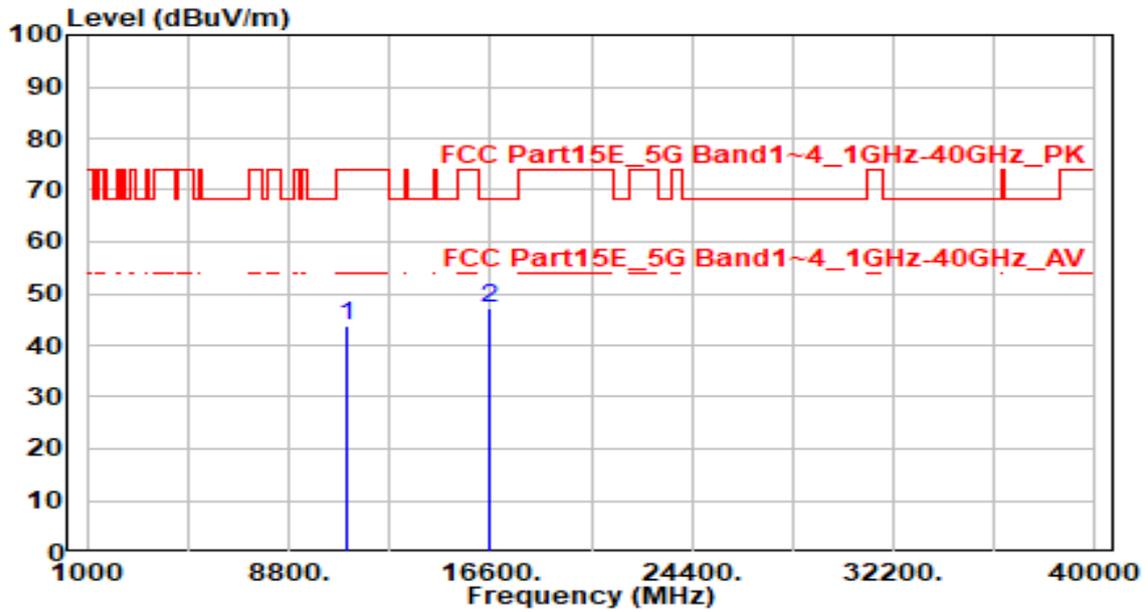


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	38.87	4.77	43.64	-30.36	74.00	200	170	Peak
2	* 16530.000	40.22	6.90	47.12	-21.08	68.20	200	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

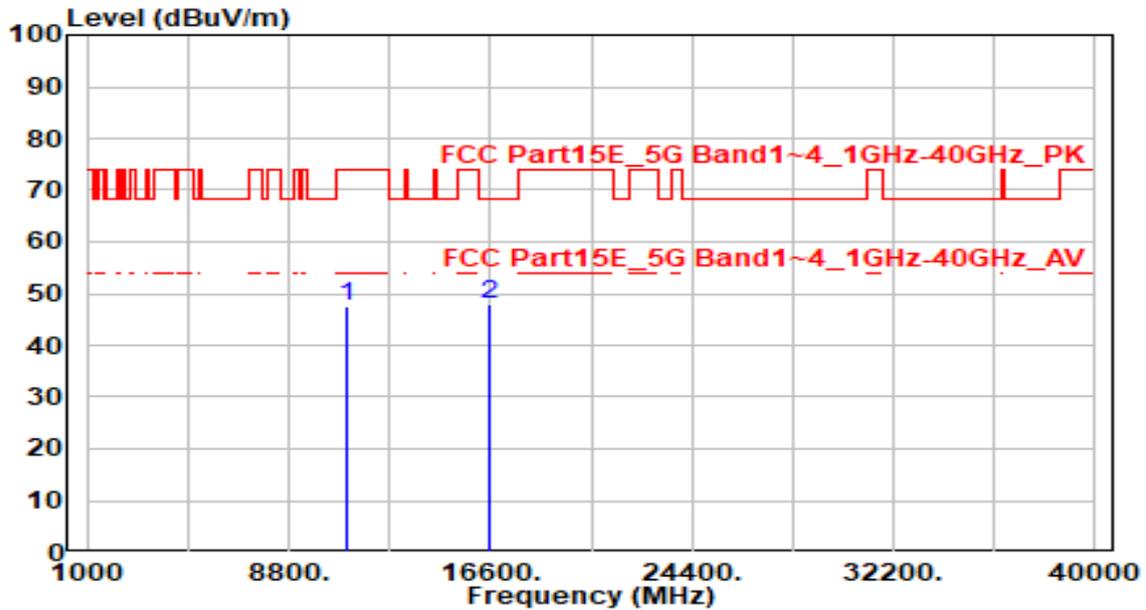


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.95	4.77	47.73	-26.27	74.00	200	200	Peak
2	* 16530.000	40.94	6.90	47.84	-20.36	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

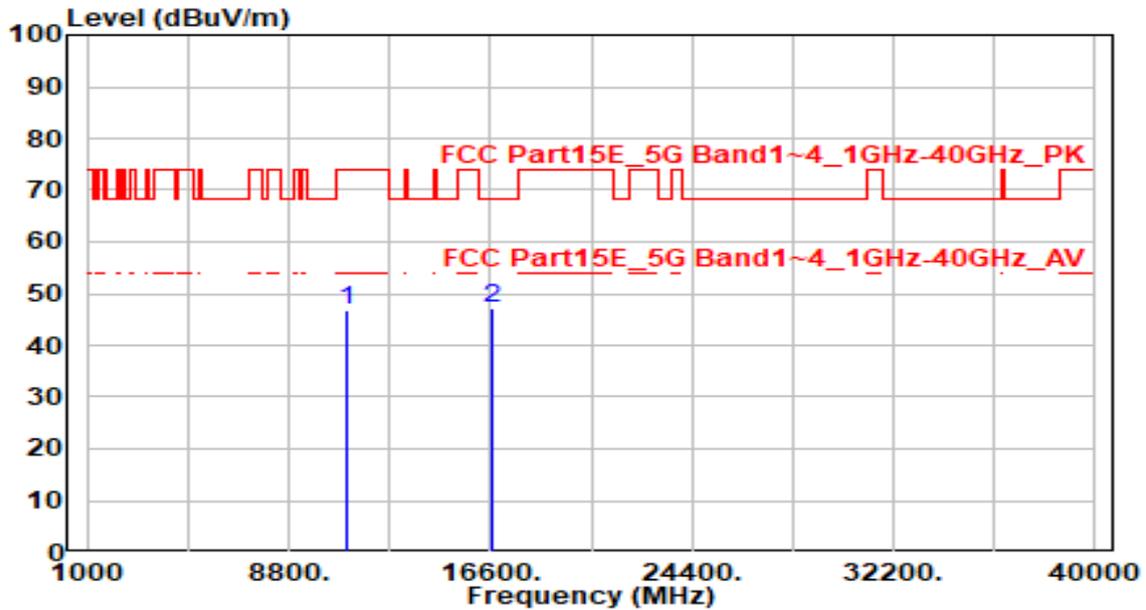


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.78	4.90	46.68	-27.32	74.00	200	200	Peak
2	* 16650.000	40.00	7.06	47.06	-21.14	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

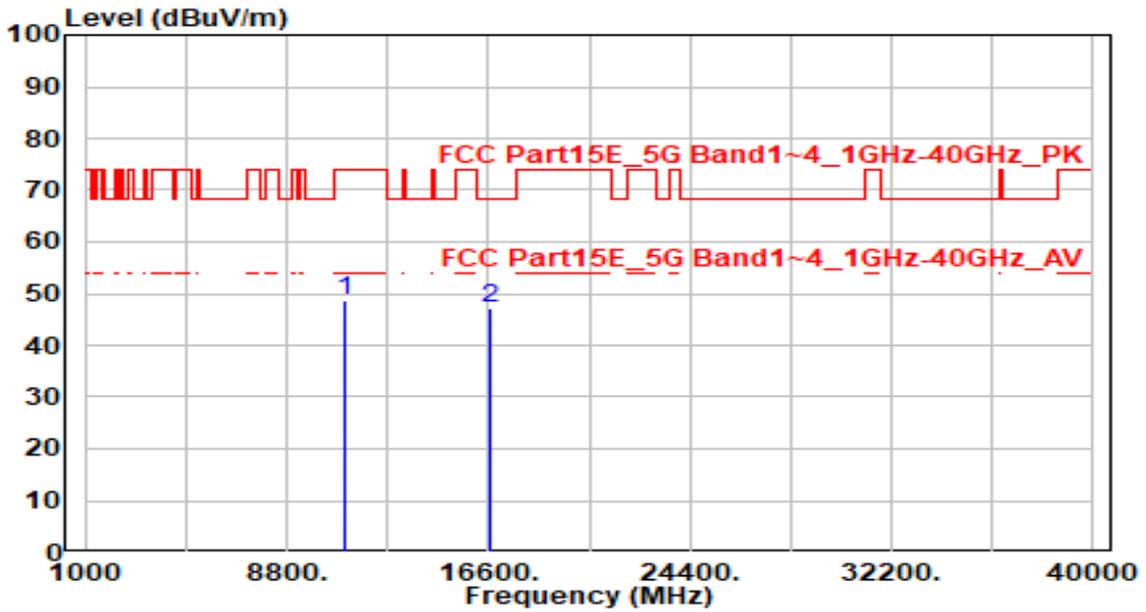


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.85	4.90	48.75	-25.25	74.00	200	200	Peak
2	* 16650.000	40.30	7.06	47.36	-20.84	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

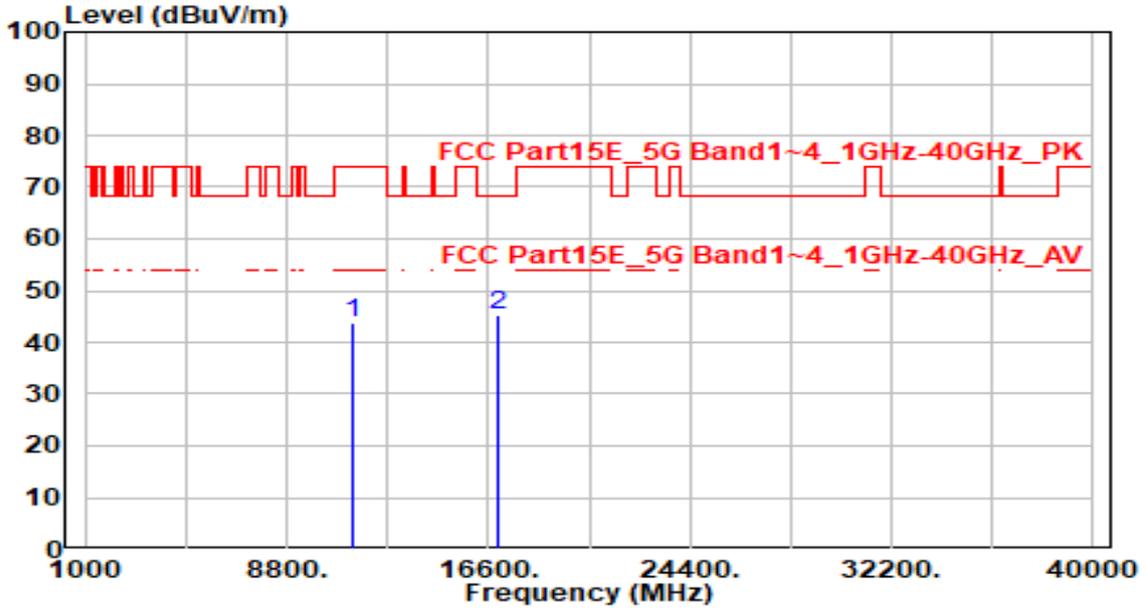


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	38.64	5.14	43.78	-30.22	74.00	200	220	Peak
2	* 17010.000	39.66	5.59	45.25	-22.95	68.20	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

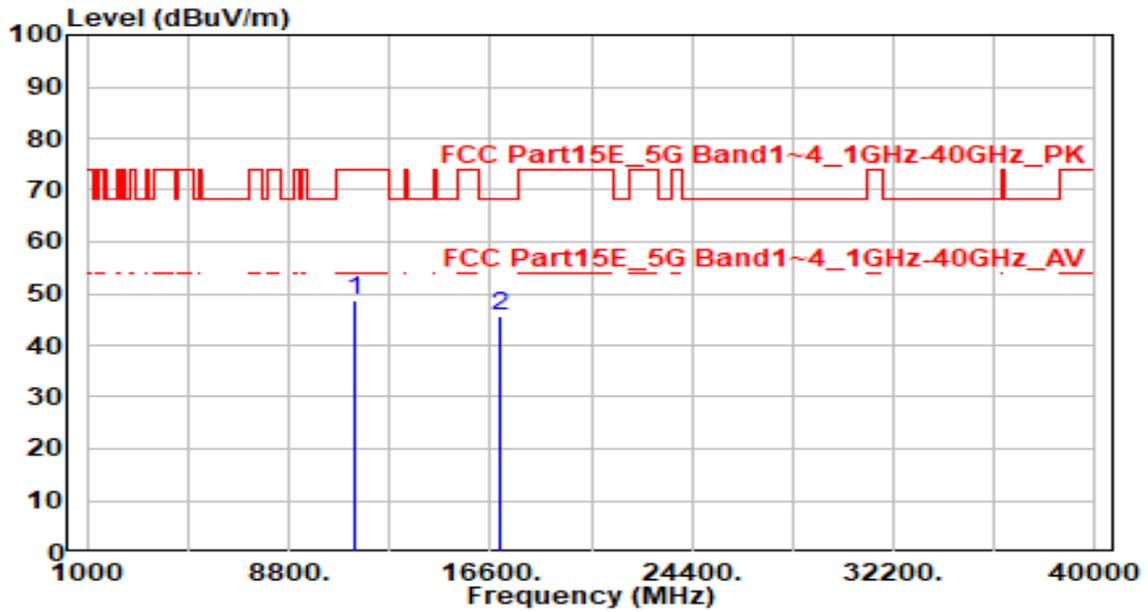


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	43.67	5.14	48.81	-25.19	74.00	200	120	Peak
2	* 17010.000	39.91	5.59	45.50	-22.70	68.20	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

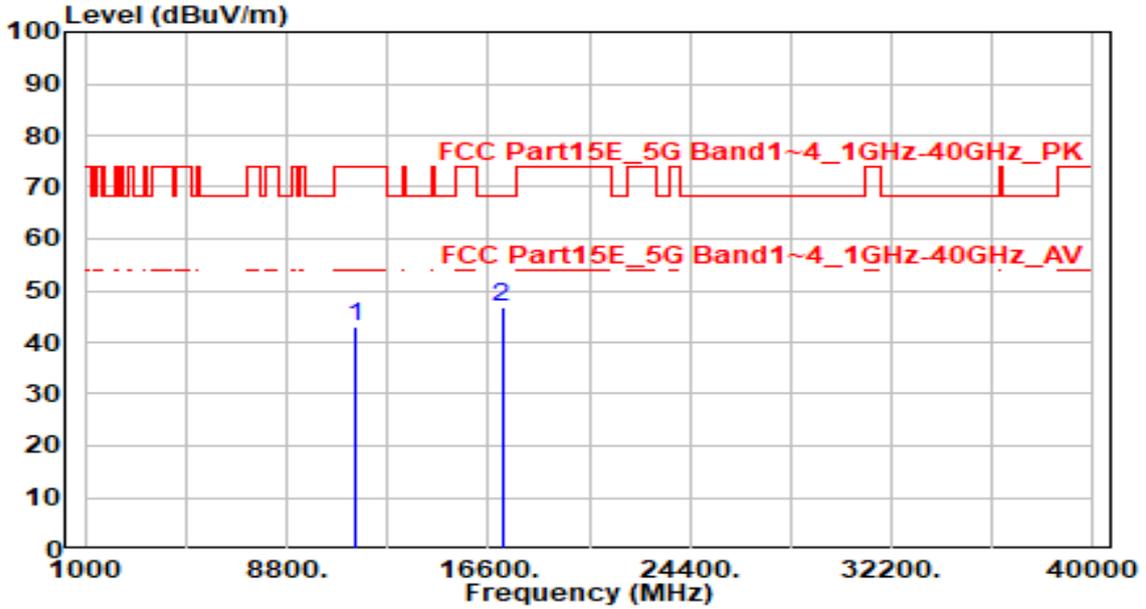


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	37.92	5.18	43.10	-30.90	74.00	200	225	Peak
2	* 17130.000	41.49	5.35	46.84	-21.36	68.20	200	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

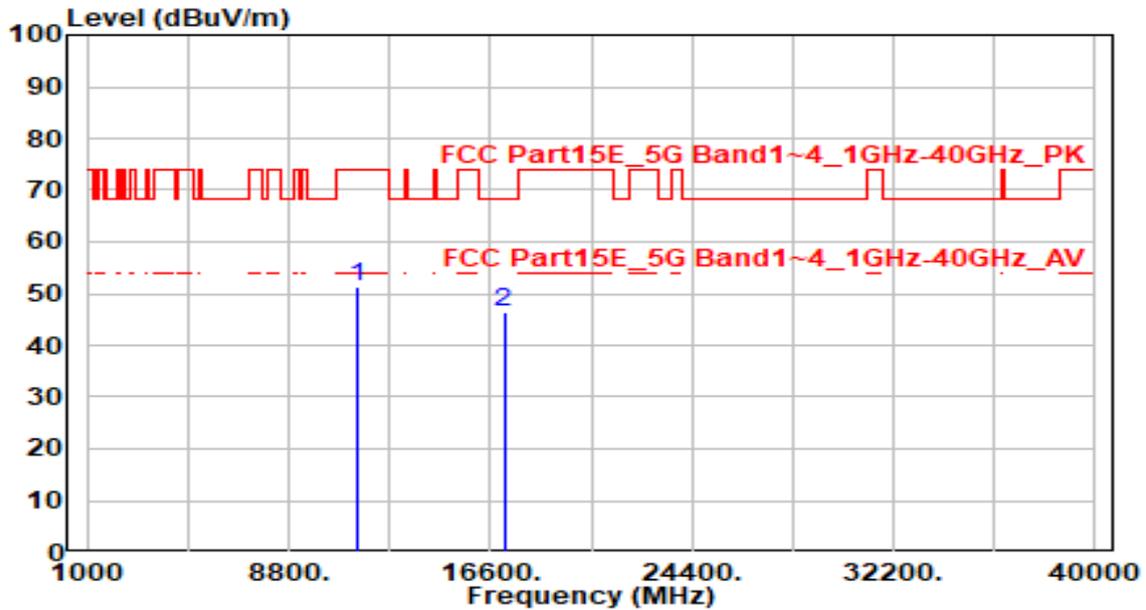


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	46.17	5.18	51.34	-22.66	74.00	200	205	Peak
2	* 17130.000	41.15	5.35	46.50	-21.70	68.20	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac_40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

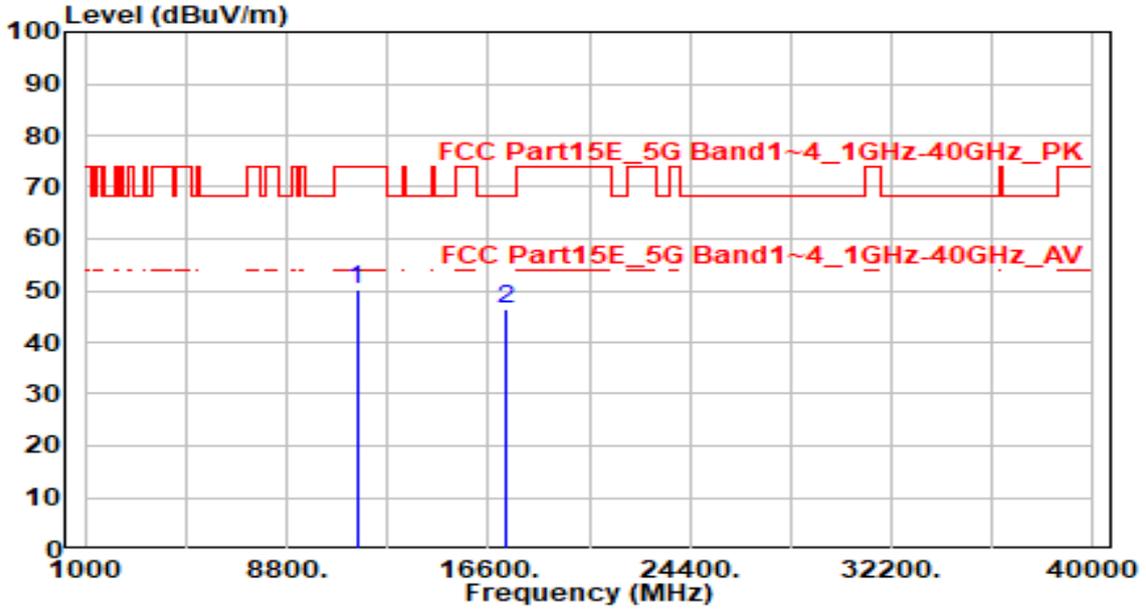


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	44.99	5.15	50.14	-23.86	74.00	200	205	Peak
2	* 17265.000	41.17	5.15	46.32	-21.88	68.20	275	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac_40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

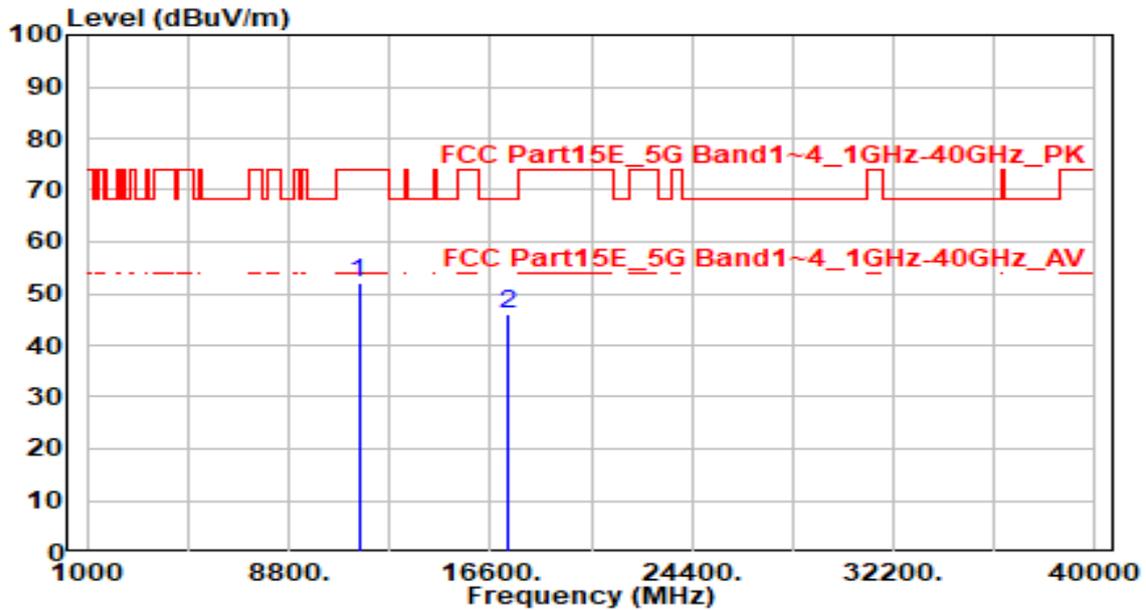


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11510.000	46.98	5.15	52.13	-21.87	74.00	200	40	Peak
2	17265.000	40.84	5.15	45.99	-22.21	68.20	200	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac_40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

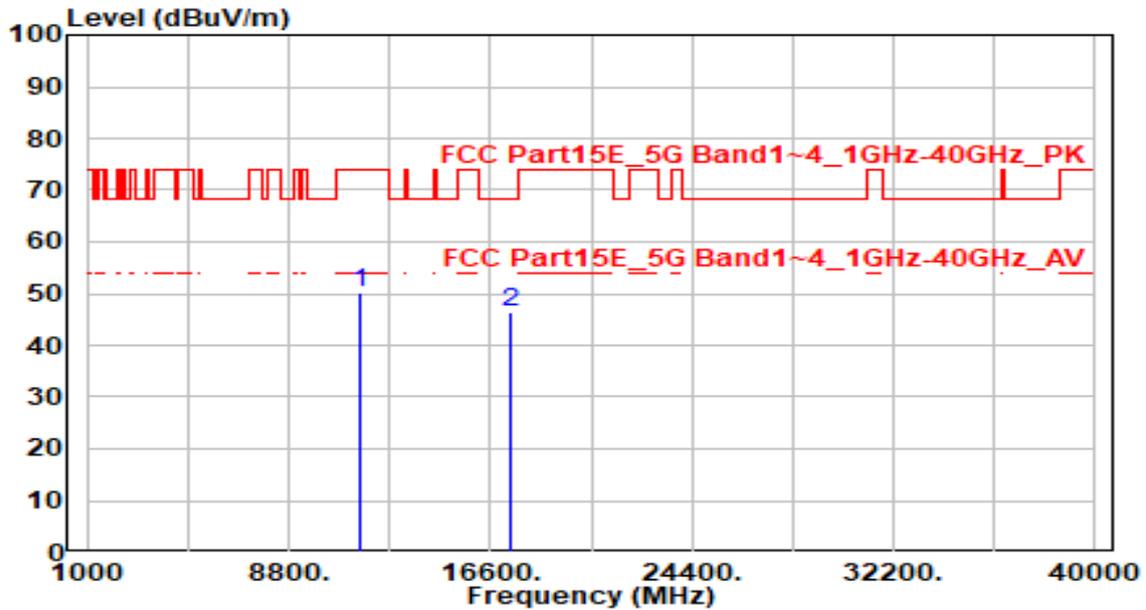


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	44.96	5.13	50.09	-23.91	74.00	200	190	Peak
2	* 17385.000	41.41	5.07	46.48	-21.72	68.20	200	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac_40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

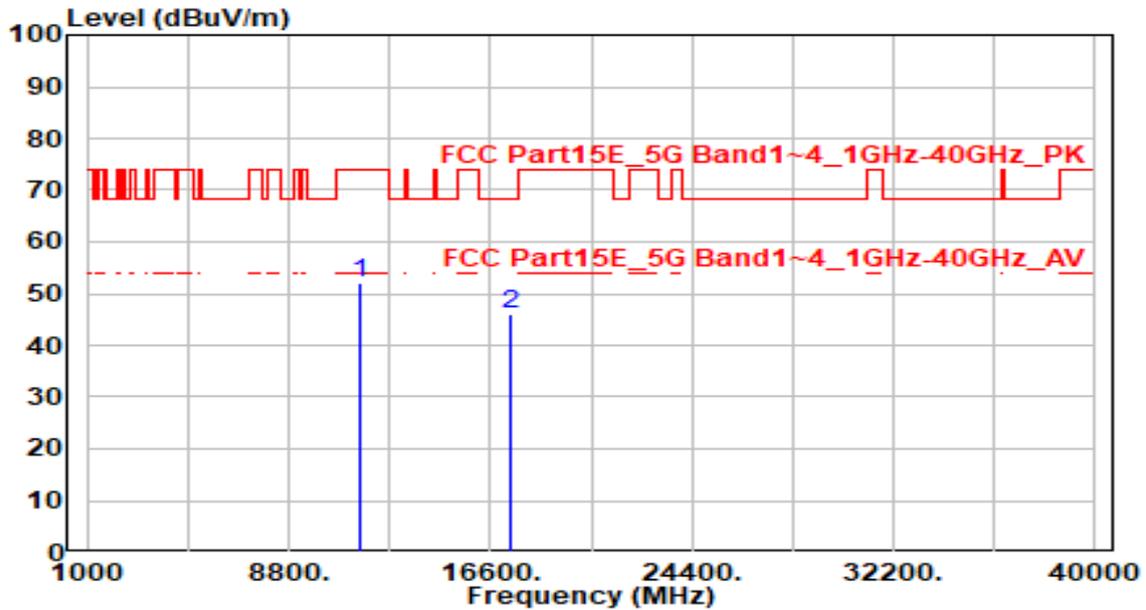


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11590.000	47.04	5.13	52.17	-21.83	74.00	200	360	Peak
2	17385.000	41.02	5.07	46.09	-22.11	68.20	200	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

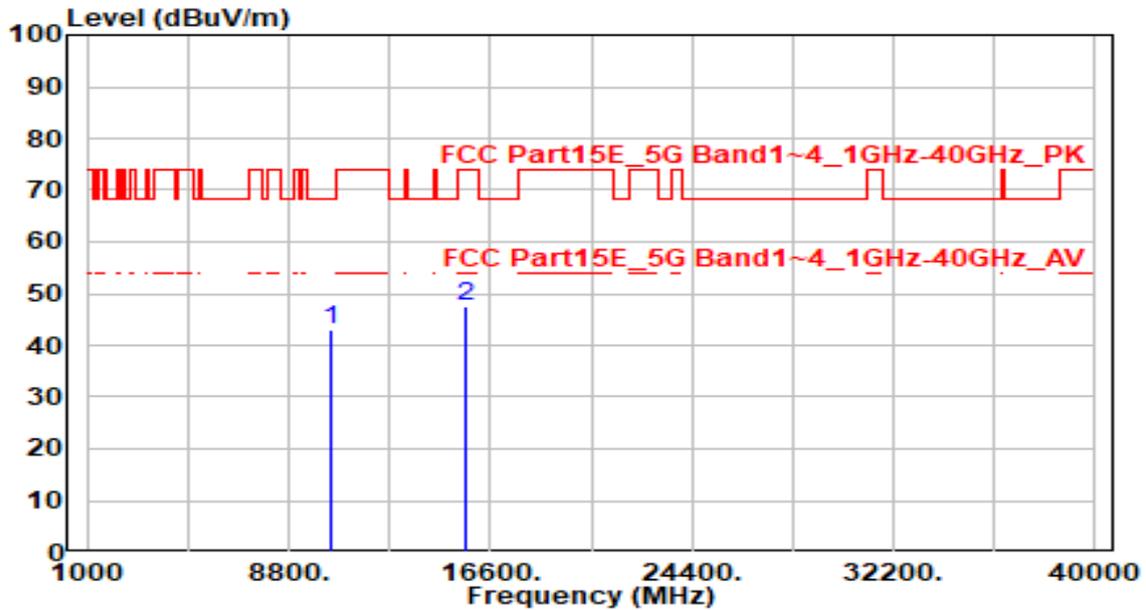


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	38.31	4.61	42.92	-25.28	68.20	100	10	Peak
2	15630.000	41.75	5.95	47.71	-26.29	74.00	170	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

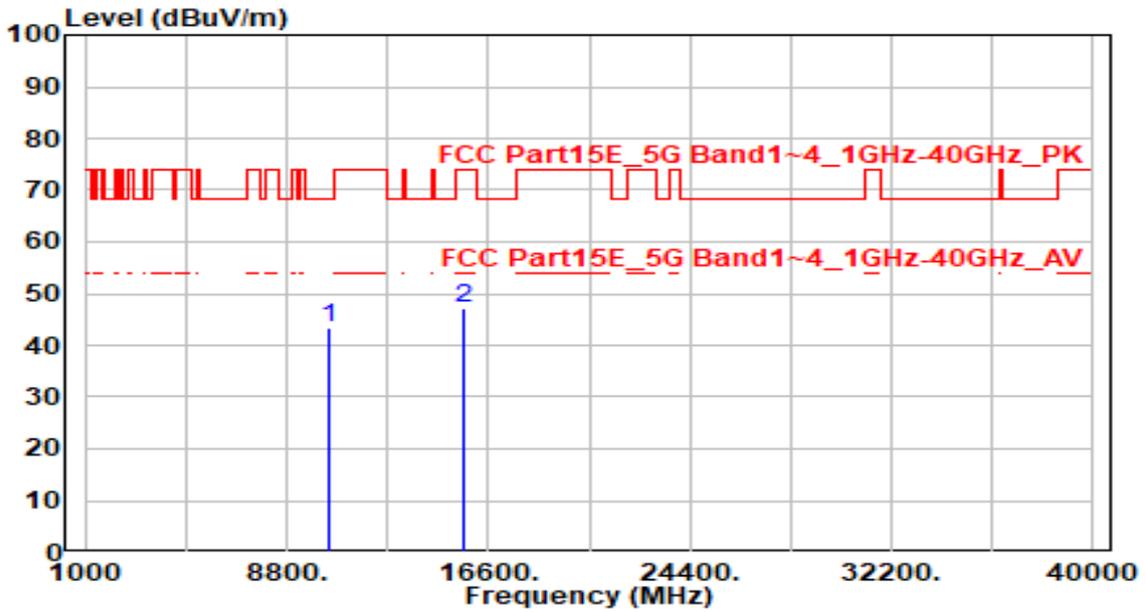


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	38.89	4.61	43.51	-24.69	68.20	200	45	Peak
2	15630.000	41.34	5.95	47.29	-26.71	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

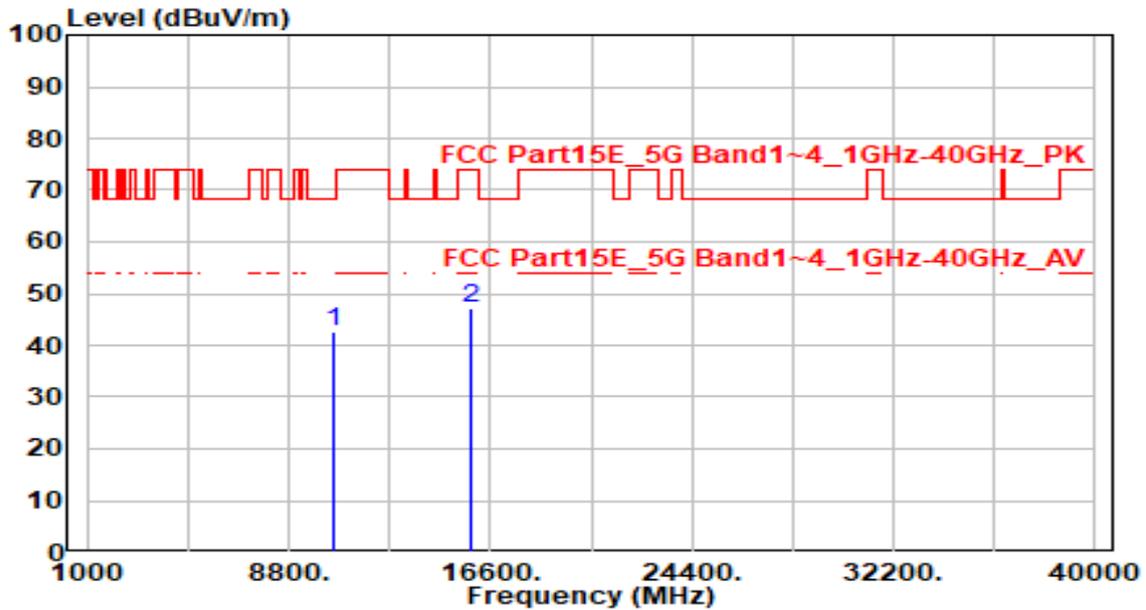


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	38.10	4.66	42.76	-25.44	68.20	200	185	Peak
2	15870.000	41.11	6.20	47.31	-26.69	74.00	200	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

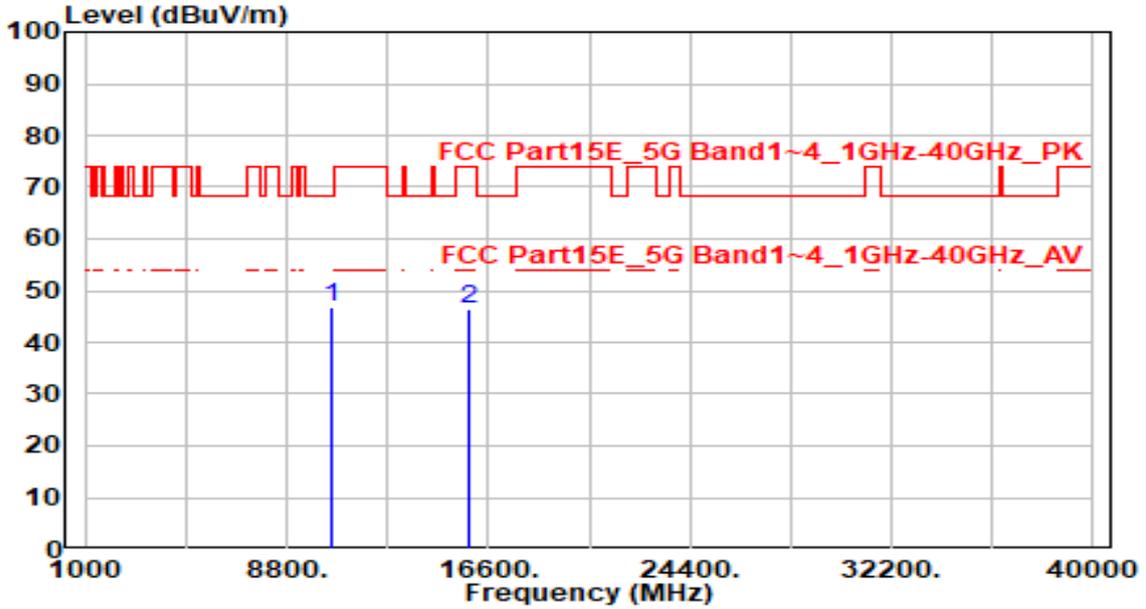


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	42.07	4.66	46.73	-21.47	68.20	200	0	Peak
2	15870.000	40.34	6.20	46.54	-27.46	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

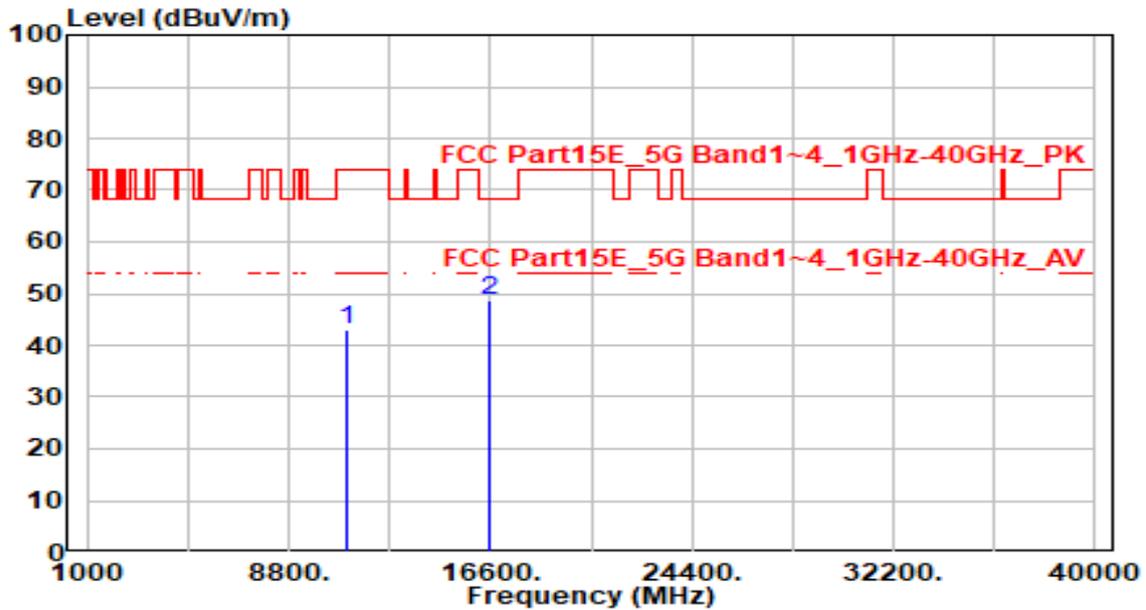


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	38.17	4.84	43.00	-31.00	74.00	200	120	Peak
2	* 16590.000	41.54	6.97	48.51	-19.69	68.20	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

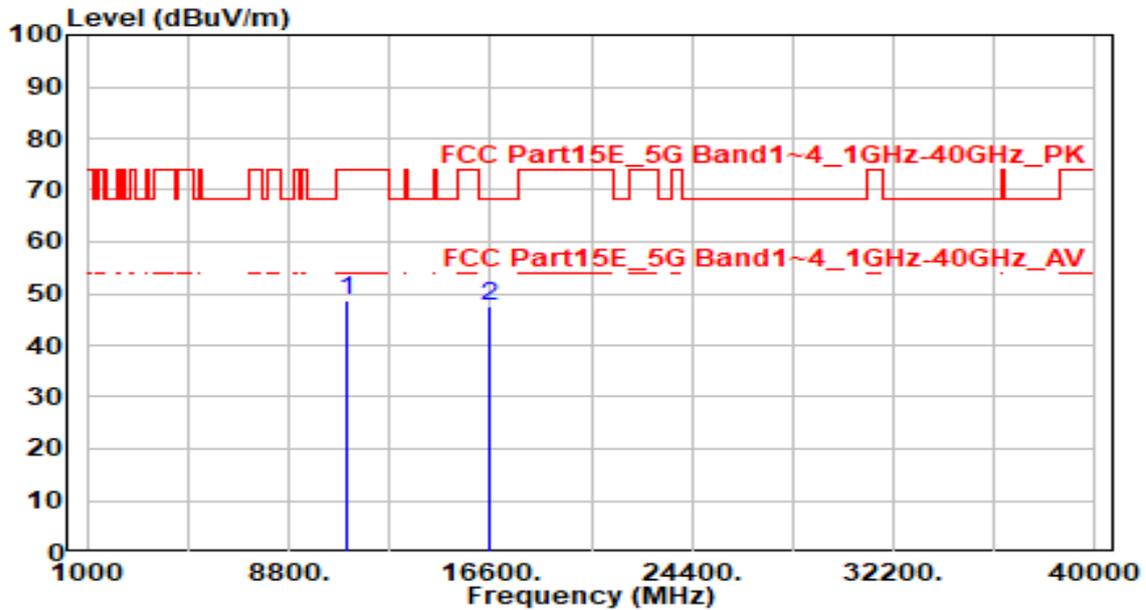


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	43.89	4.84	48.72	-25.28	74.00	300	30	Peak
2	* 16590.000	40.53	6.97	47.50	-20.70	68.20	200	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

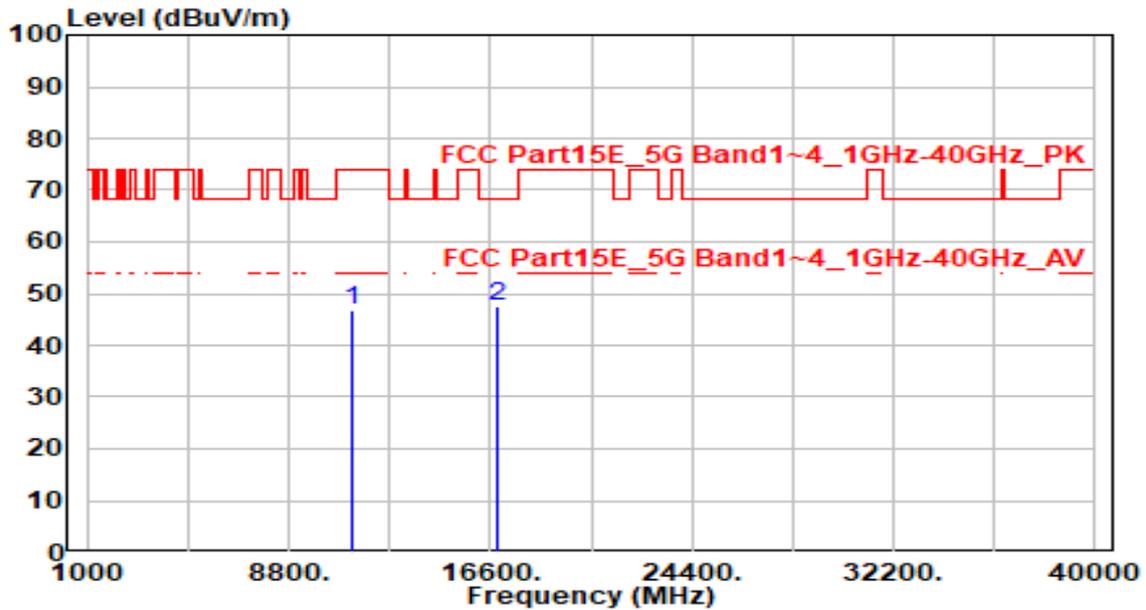


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.61	5.07	46.68	-27.32	74.00	300	280	Peak
2	* 16830.000	41.08	6.58	47.67	-20.53	68.20	300	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

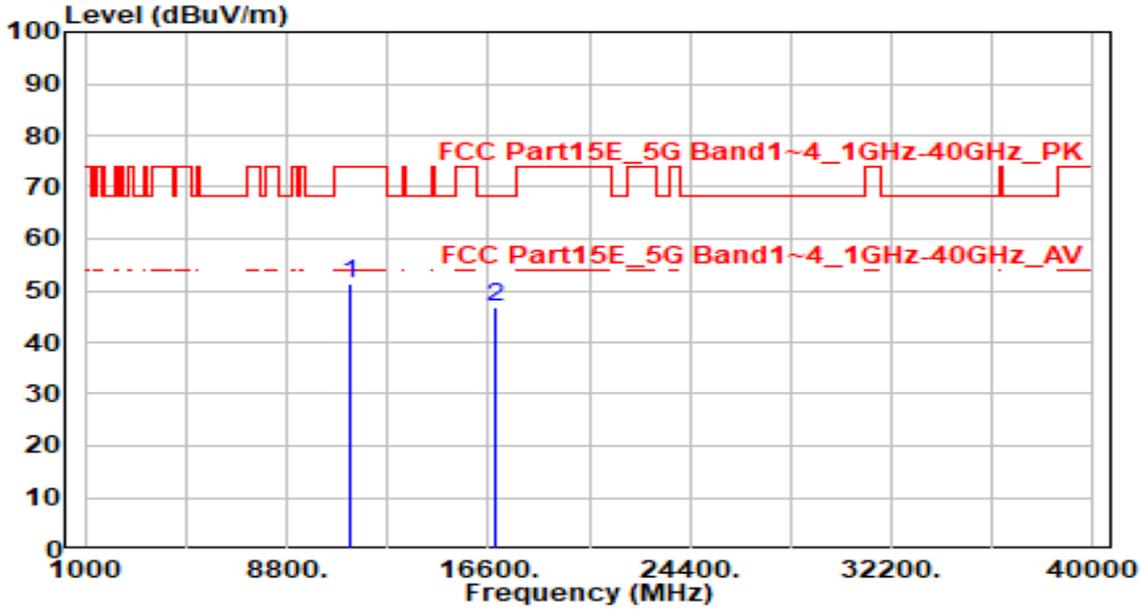


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	46.17	5.07	51.24	-22.76	74.00	300	5	Peak
2	* 16830.000	40.26	6.58	46.84	-21.36	68.20	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

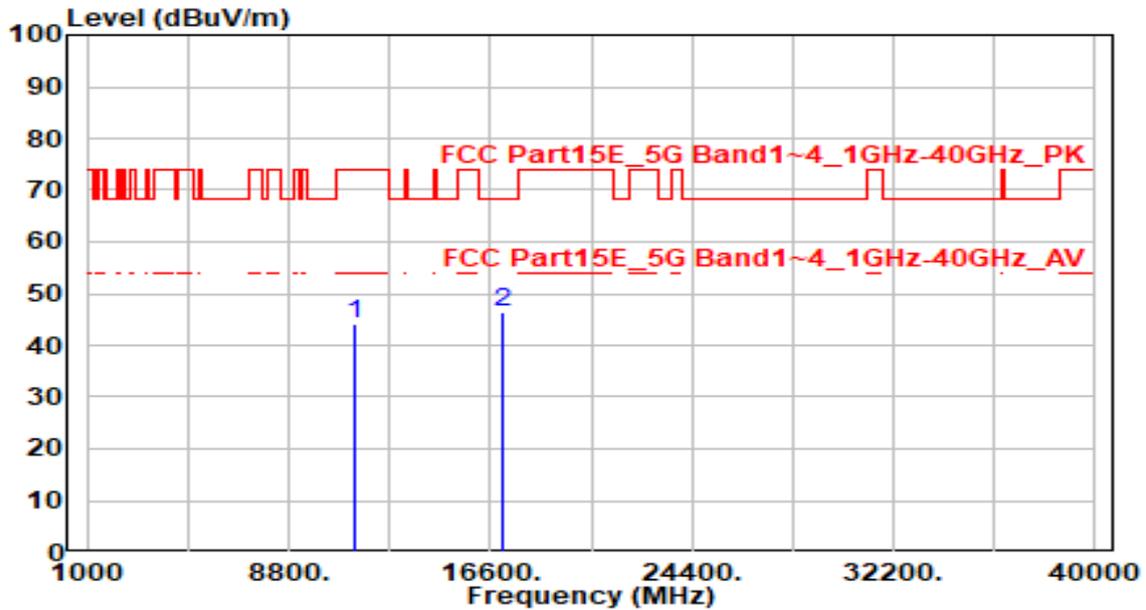


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	38.95	5.17	44.12	-29.88	74.00	300	200	Peak
2	* 17070.000	41.00	5.47	46.48	-21.72	68.20	300	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

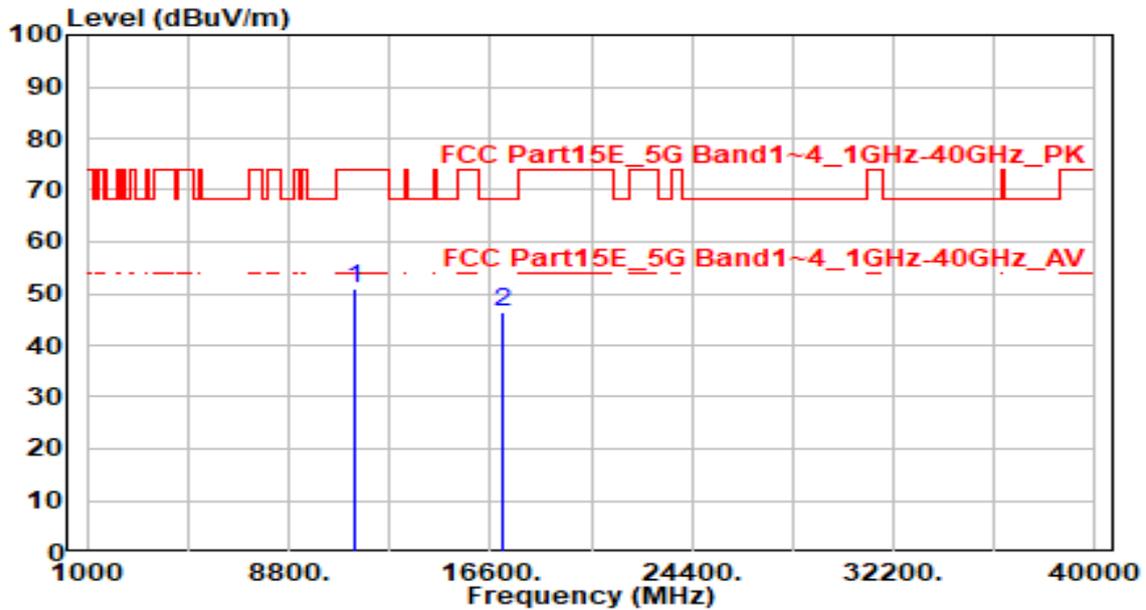


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	45.78	5.17	50.95	-23.05	74.00	200	205	Peak
2	* 17070.000	40.91	5.47	46.38	-21.82	68.20	300	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

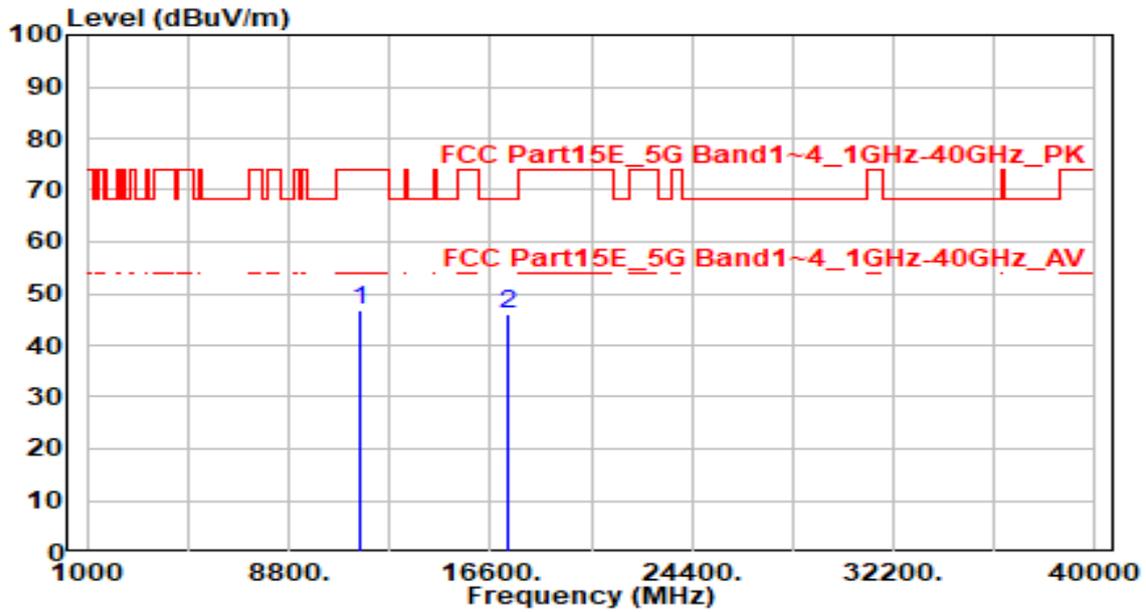


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.70	5.14	46.84	-27.16	74.00	200	185	Peak
2	* 17325.000	41.05	5.11	46.16	-22.04	68.20	300	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

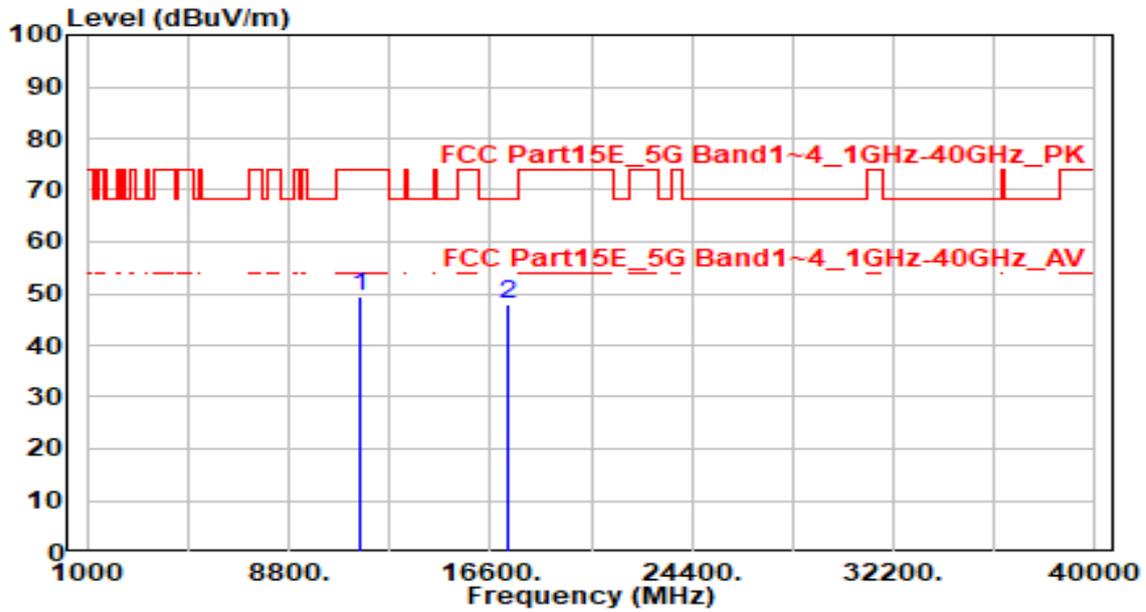


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	44.20	5.14	49.34	-24.66	74.00	300	60	Peak
2	* 17325.000	42.89	5.11	48.00	-20.20	68.20	200	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-160MHz_TX_Band1&2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

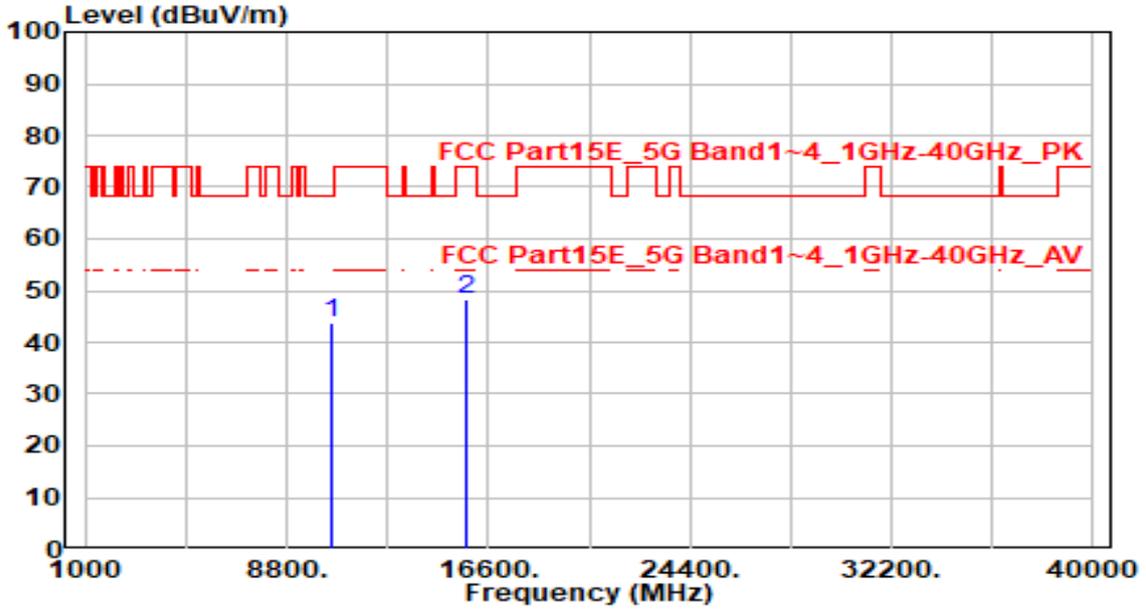


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	38.97	4.64	43.61	-24.59	68.20	300	235	Peak
2	15750.000	42.07	6.05	48.13	-25.87	74.00	300	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-160MHz_TX_Band1&2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

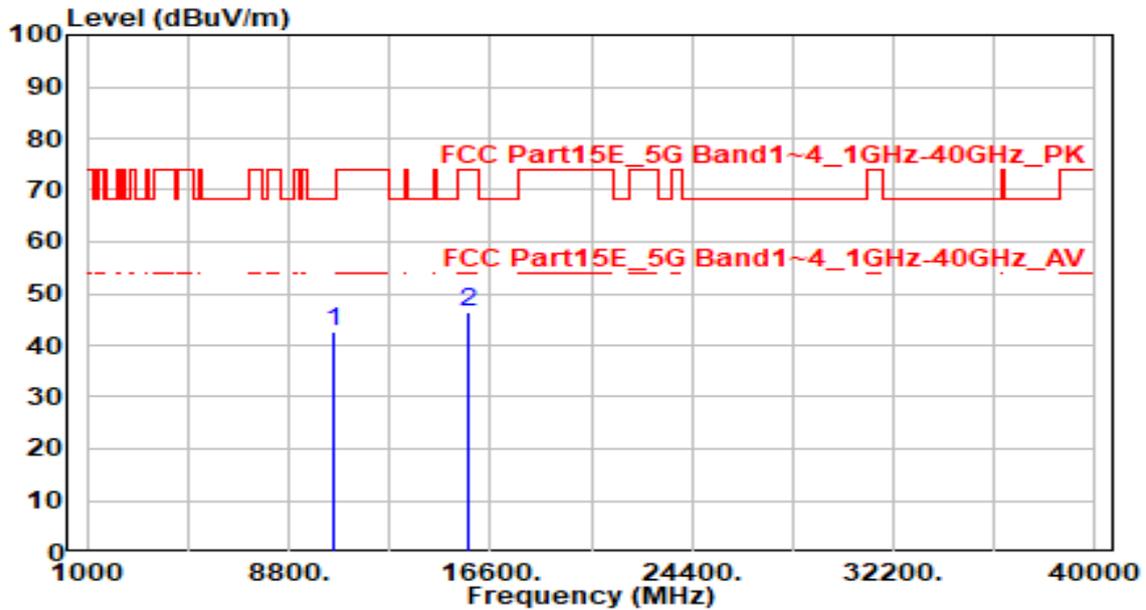


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	38.18	4.64	42.81	-25.39	68.20	300	140	Peak
2		40.54	6.05	46.59	-27.41	74.00	300	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

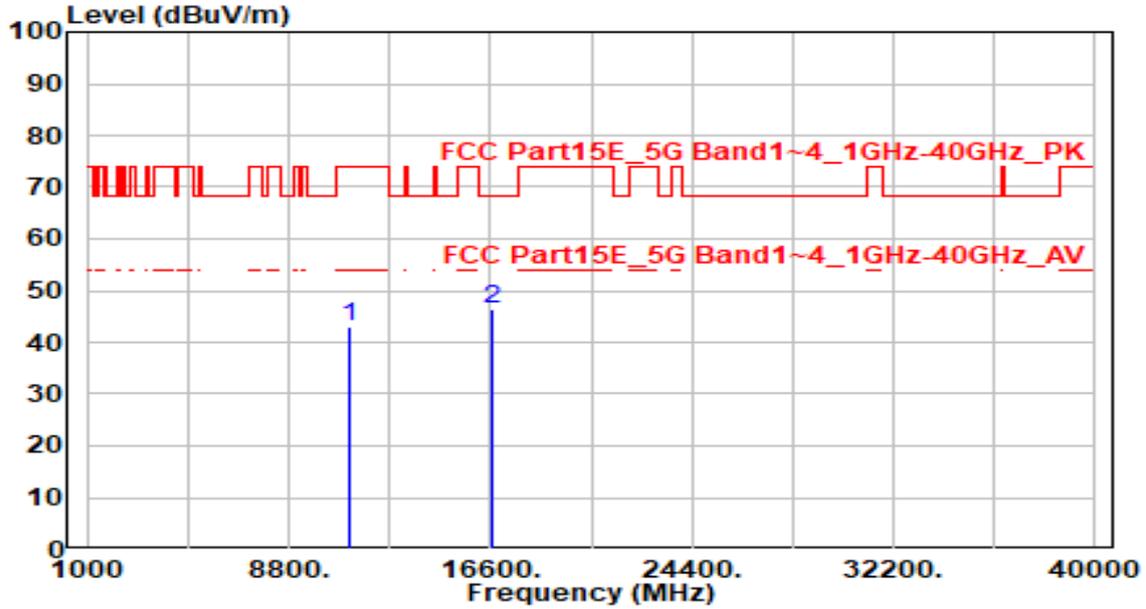


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	37.92	4.97	42.88	-31.12	74.00	300	305	Peak
2	* 16710.000	39.44	7.15	46.59	-21.61	68.20	300	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

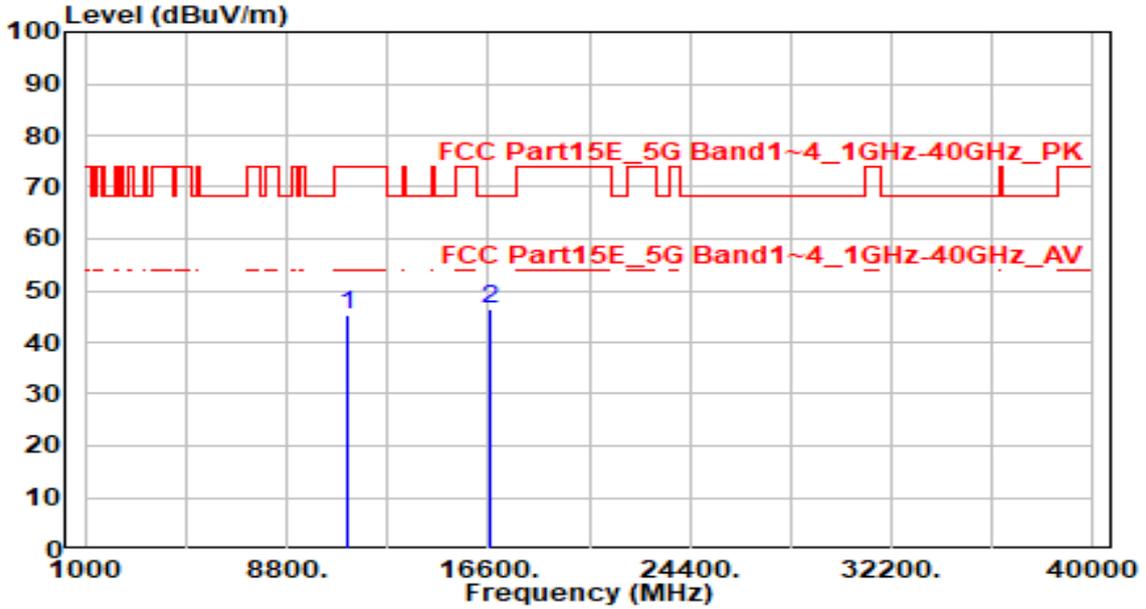


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.34	4.97	45.30	-28.70	74.00	300	260	Peak
2	* 16710.000	39.38	7.15	46.53	-21.67	68.20	300	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

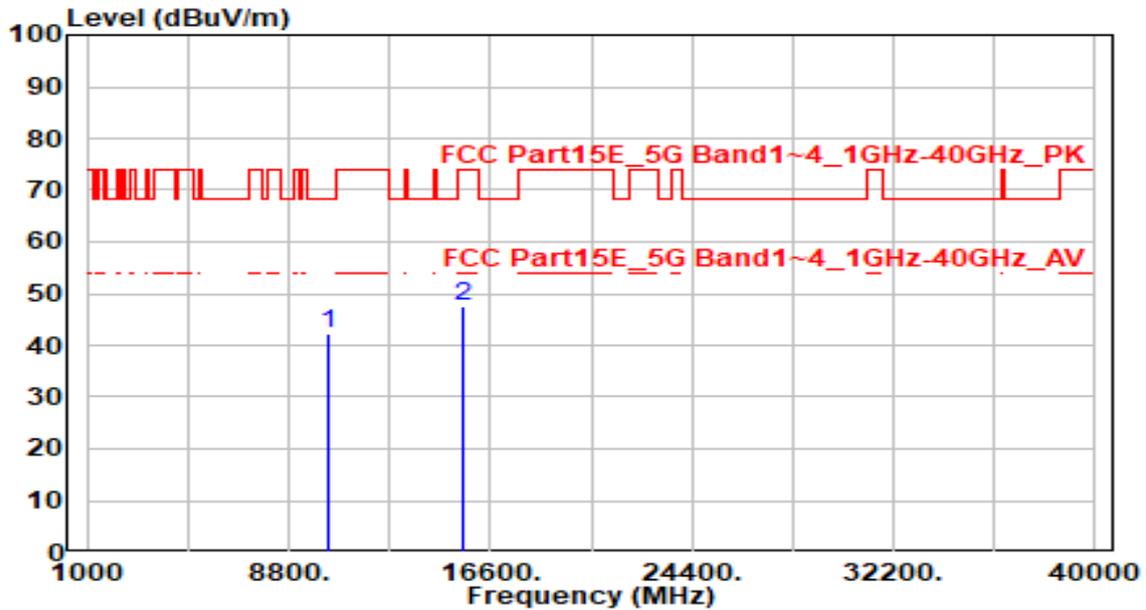


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	37.81	4.62	42.43	-25.77	68.20	300	360	Peak
2	15540.000	41.70	5.91	47.61	-26.39	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

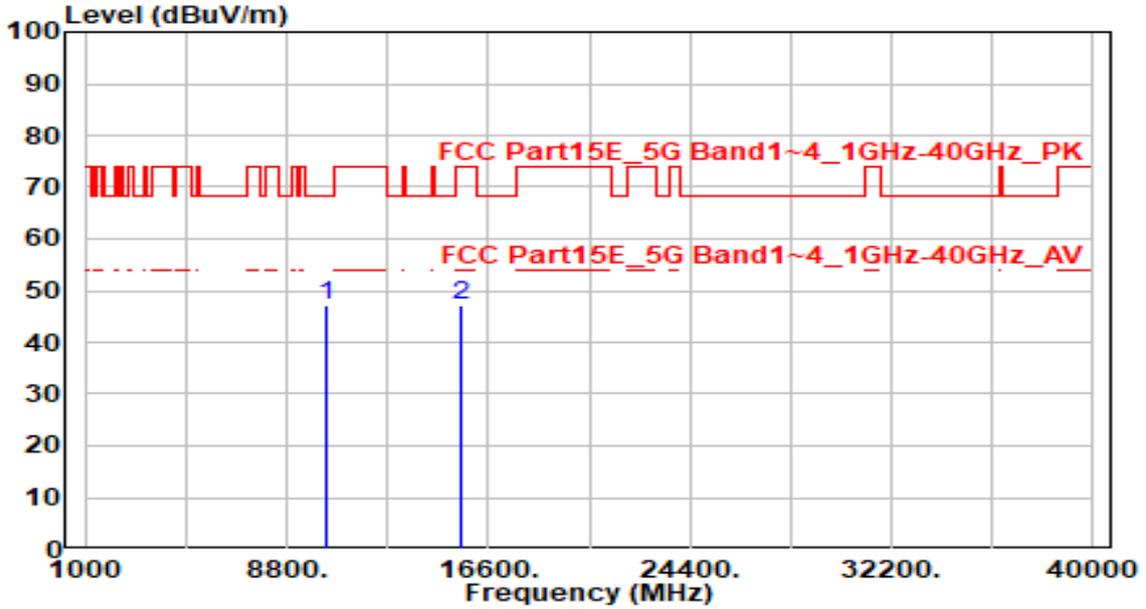


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.60	4.62	47.22	-20.98	68.20	200	150	Peak
2	15540.000	41.10	5.91	47.02	-26.98	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

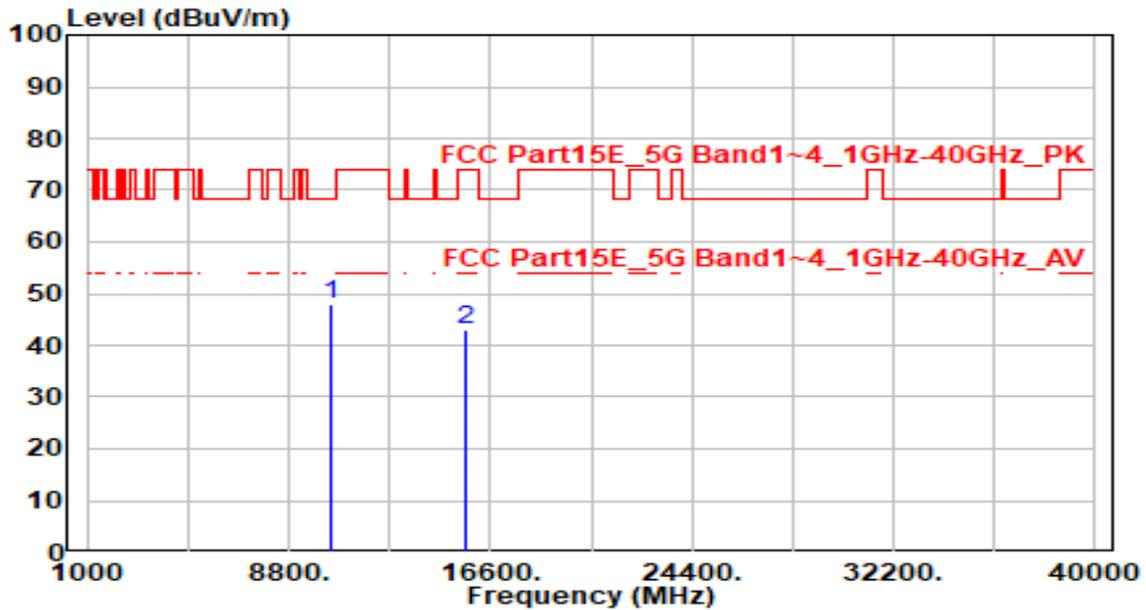


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	43.40	4.62	48.02	-20.18	68.20	300	80	Peak
2	15660.000	37.16	5.98	43.14	-30.86	74.00	285	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

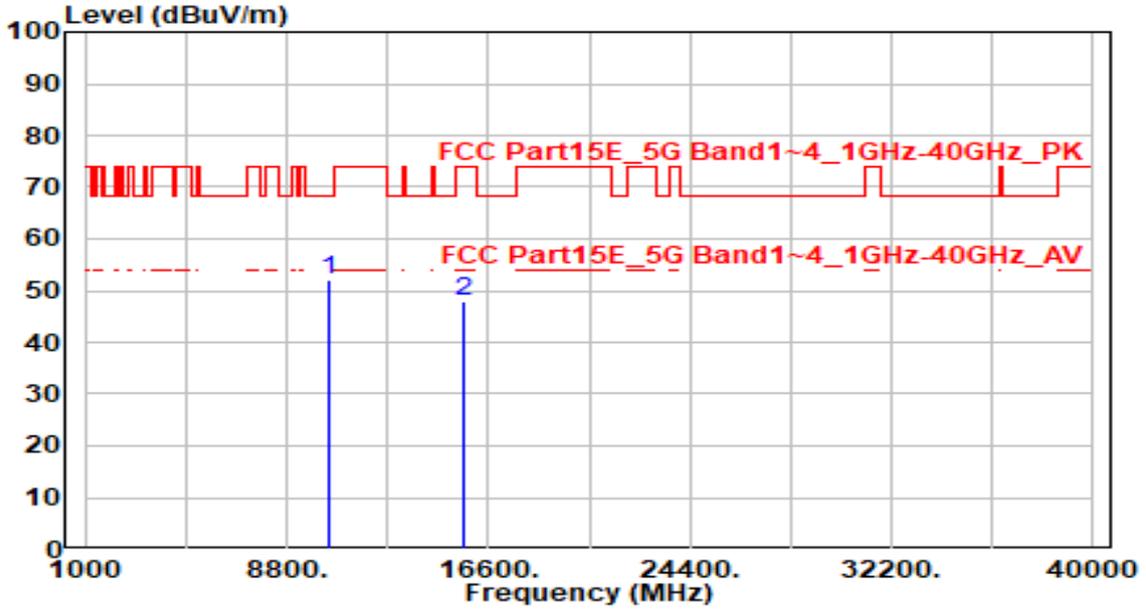


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	47.62	4.62	52.24	-15.96	68.20	200	50	Peak
2	15660.000	41.93	5.98	47.90	-26.10	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

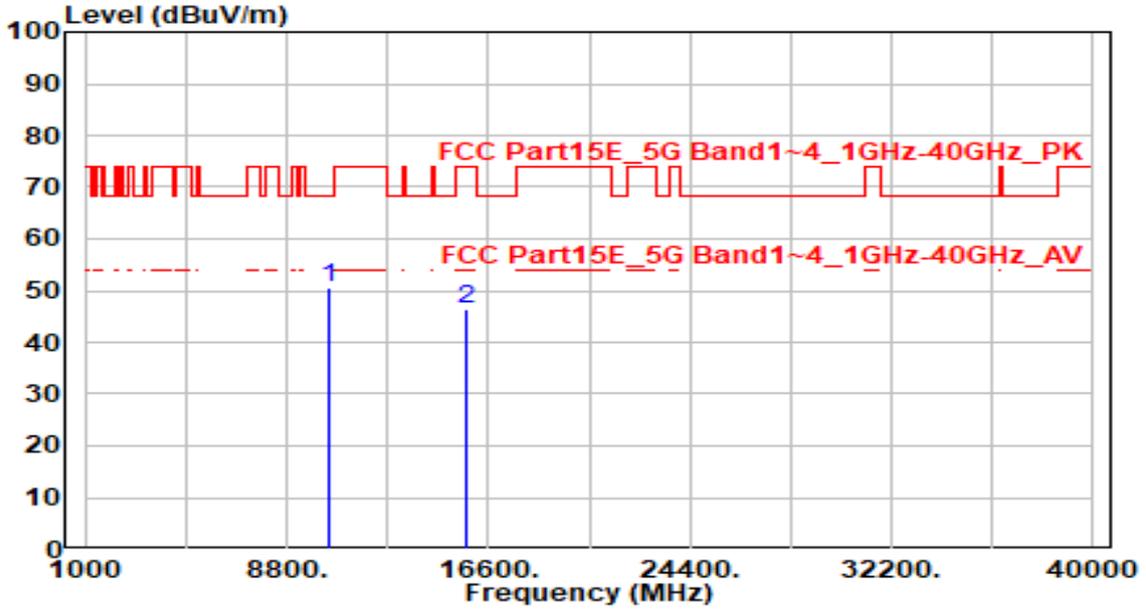


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	45.86	4.63	50.49	-17.71	68.20	300	195	Peak
2	15720.000	40.25	6.03	46.27	-27.73	74.00	300	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

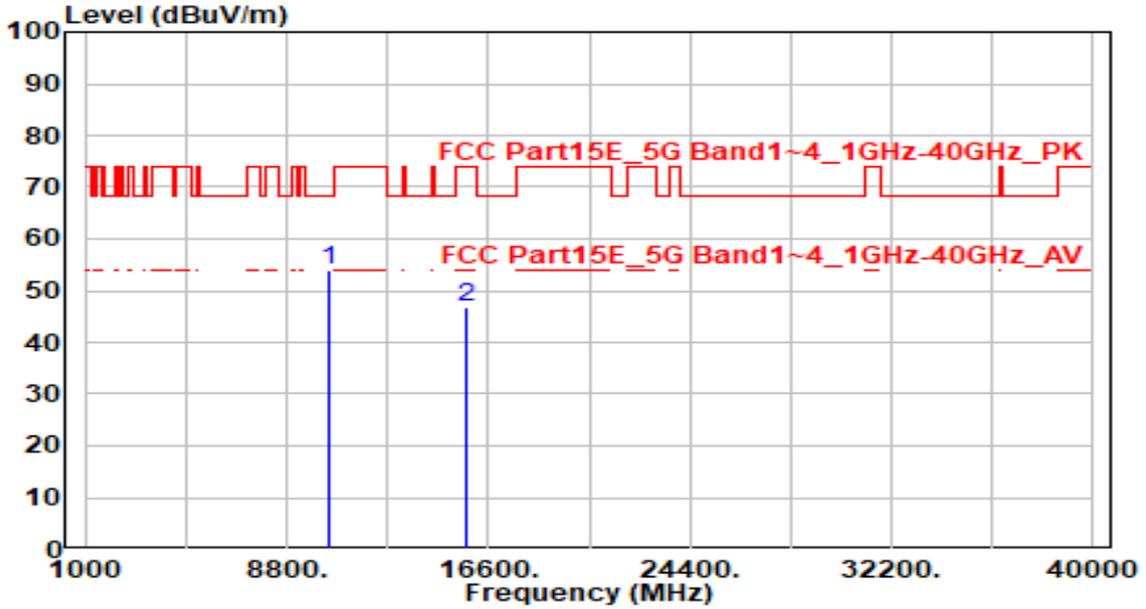


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	49.17	4.63	53.80	-14.40	68.20	200	170	Peak
2	15720.000	40.59	6.03	46.62	-27.38	74.00	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

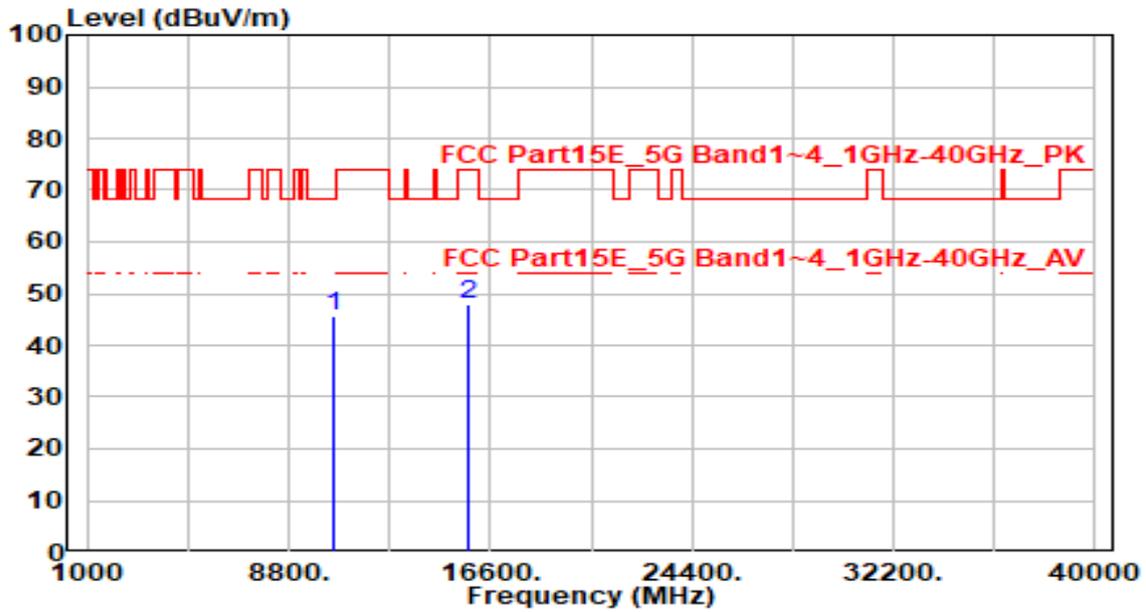


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	40.83	4.64	45.47	-22.73	68.20	300	90	Peak
2	15780.000	41.82	6.08	47.90	-26.10	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

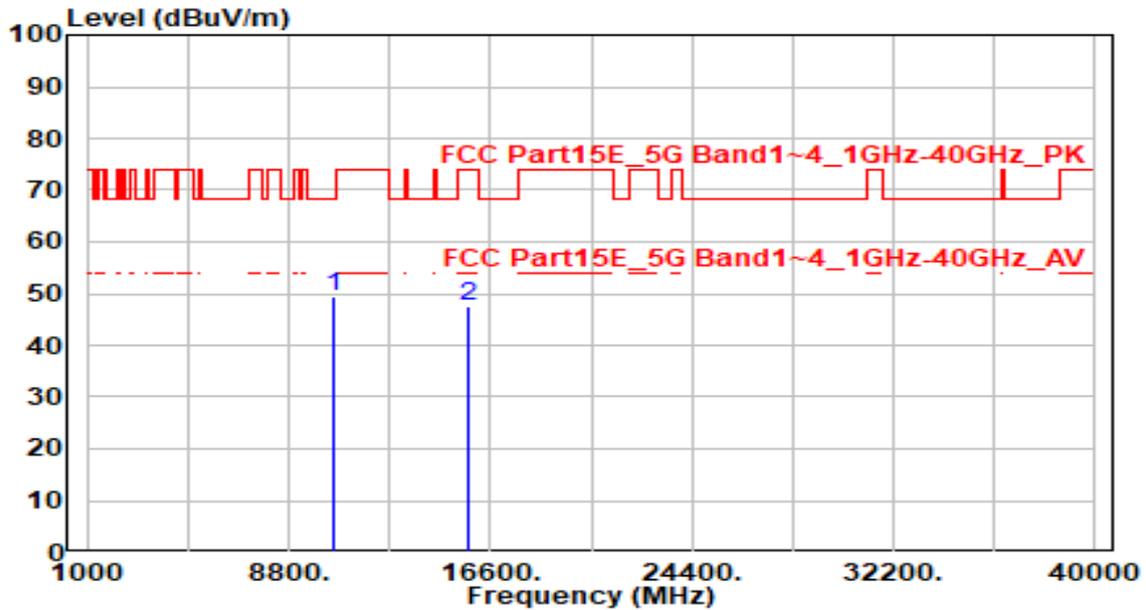


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	44.64	4.64	49.29	-18.91	68.20	300	175	Peak
2	15780.000	41.62	6.08	47.70	-26.30	74.00	300	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

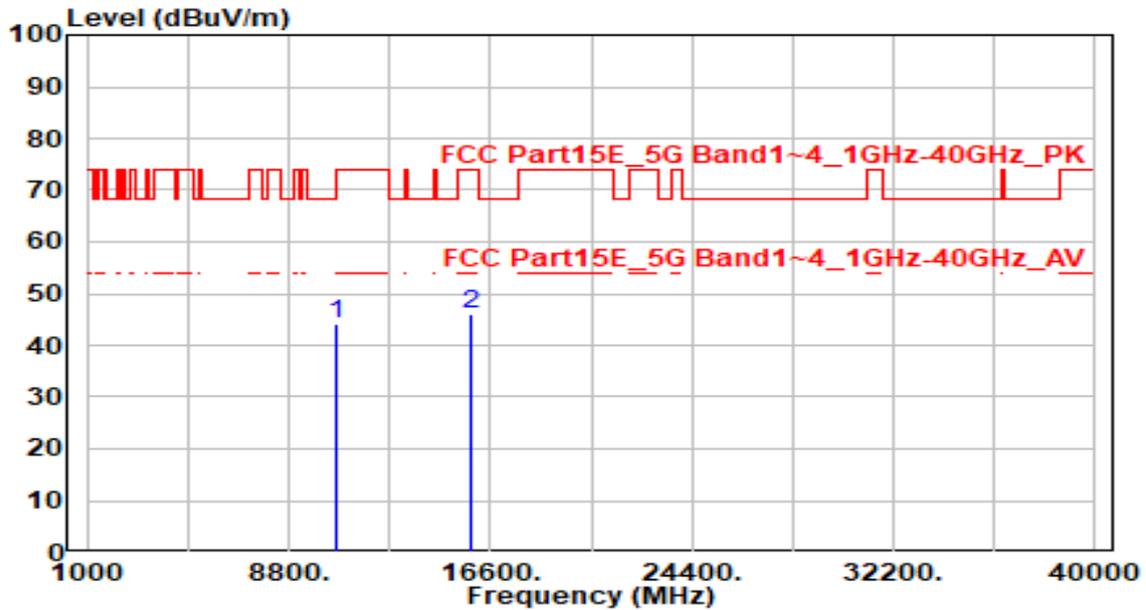


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39.57	4.66	44.23	-23.97	68.20	300	0	Peak
2		39.86	6.24	46.09	-27.91	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

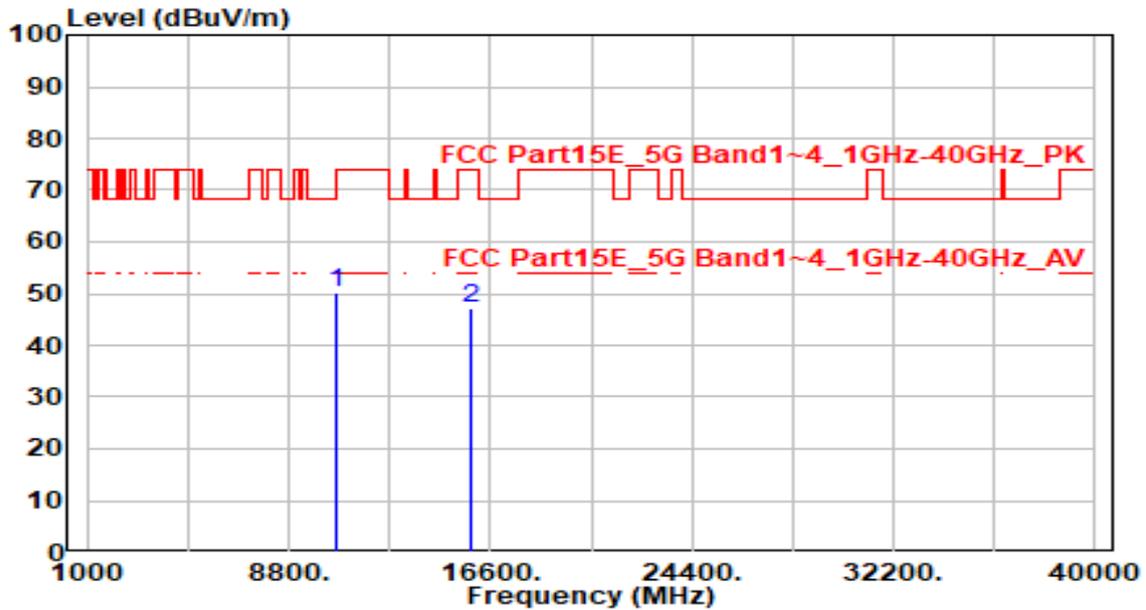


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	45.61	4.66	50.27	-17.93	68.20	200	190	Peak
2	15900.000	41.11	6.24	47.35	-26.65	74.00	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

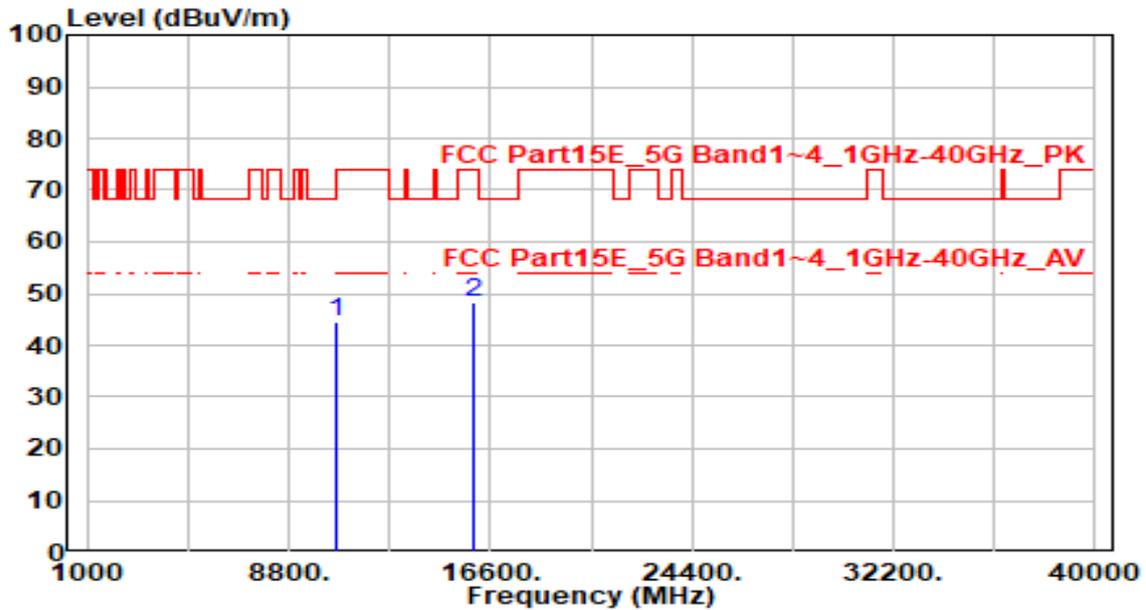


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.74	4.65	44.39	-29.61	74.00	300	20	Peak
2	* 15960.000	42.15	6.32	48.47	-25.53	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

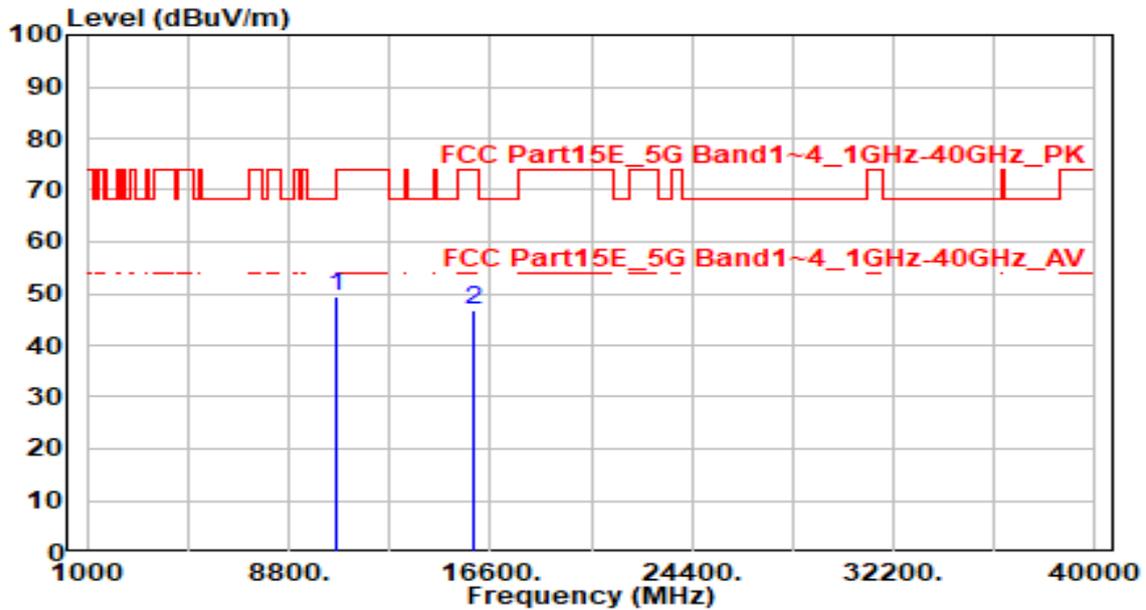


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10640.000	44.87	4.65	49.52	-24.48	74.00	200	335	Peak
2		15960.000	40.52	6.32	46.85	-27.15	74.00	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

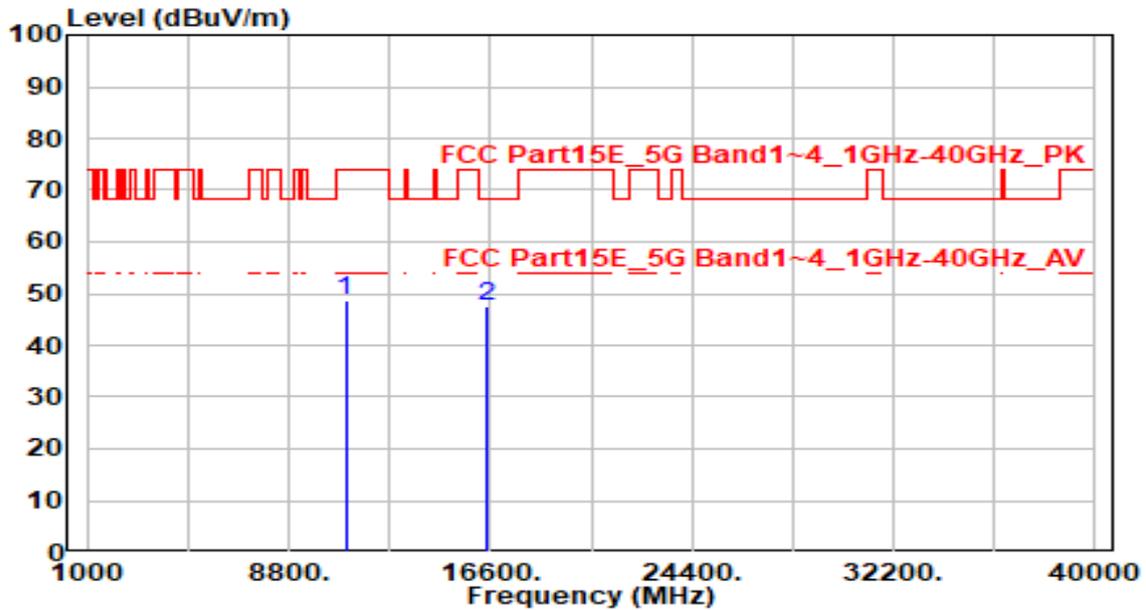


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.99	4.74	48.73	-25.27	74.00	300	0	Peak
2	* 16500.000	40.55	6.86	47.41	-20.79	68.20	300	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

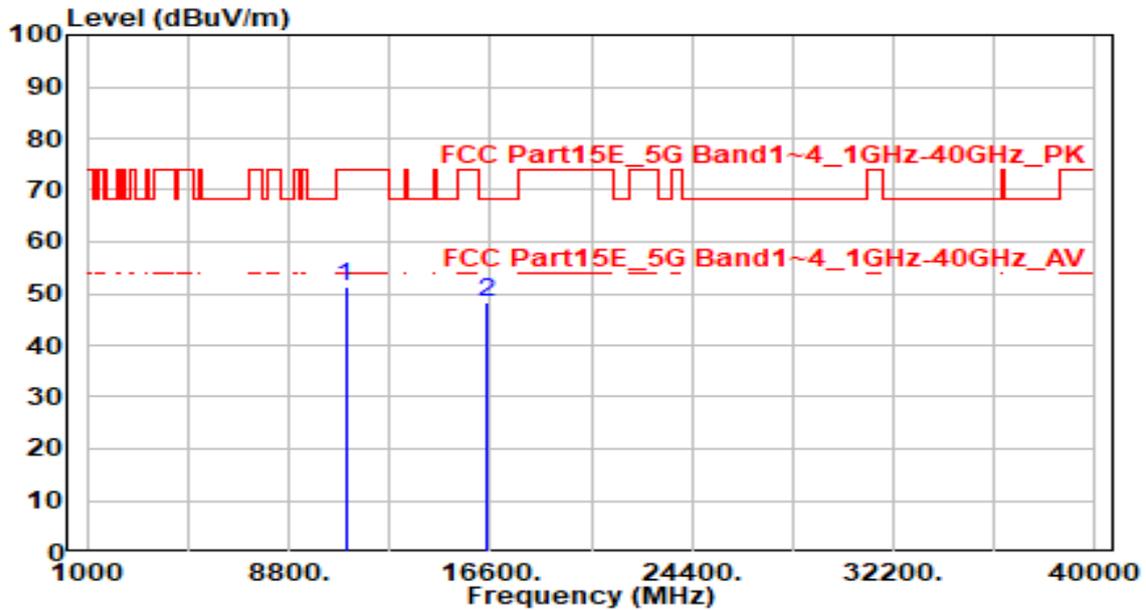


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	46.76	4.74	51.50	-22.50	74.00	200	65	Peak
2	* 16500.000	41.54	6.86	48.40	-19.80	68.20	300	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

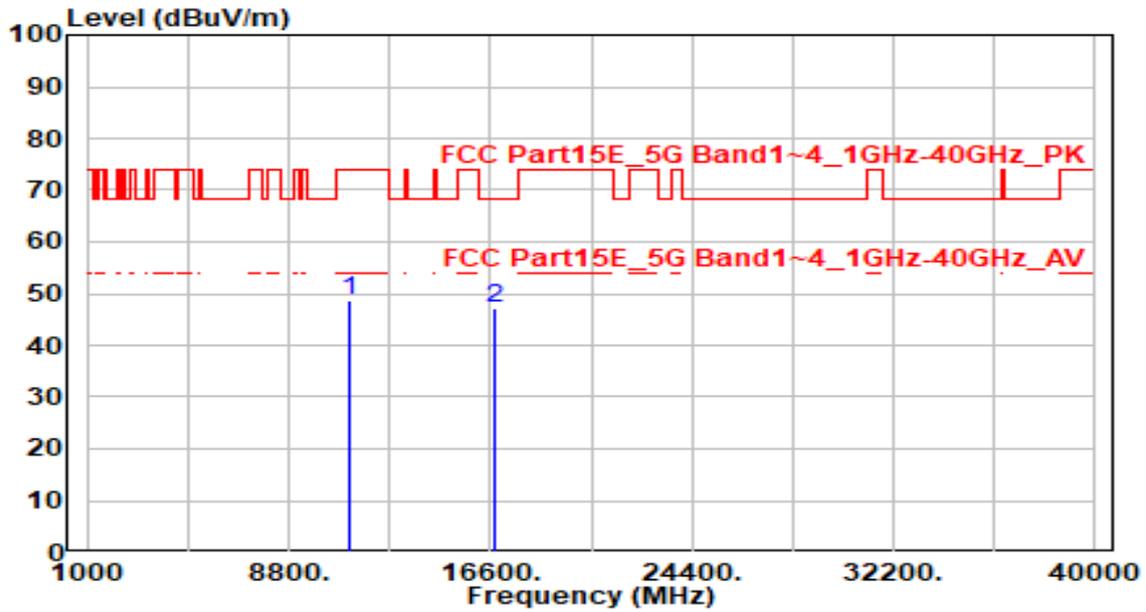


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.78	5.00	48.78	-25.22	74.00	300	0	Peak
2	* 16740.000	40.05	7.19	47.23	-20.97	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

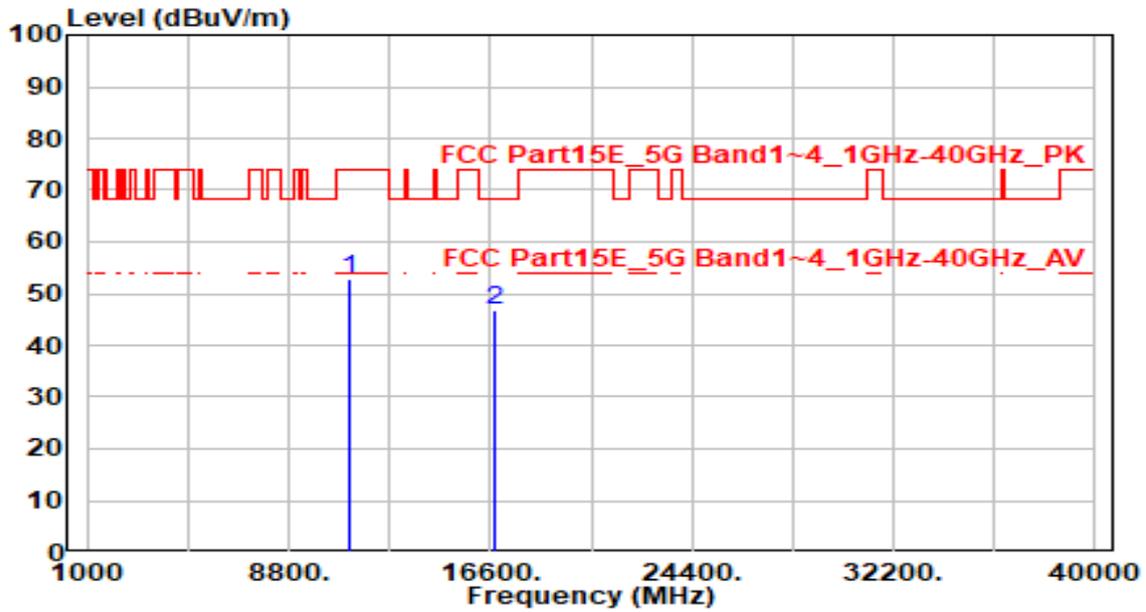


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11160.000	47.96	5.00	52.96	-21.04	74.00	200	165	Peak
2	16740.000	39.75	7.19	46.94	-21.26	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

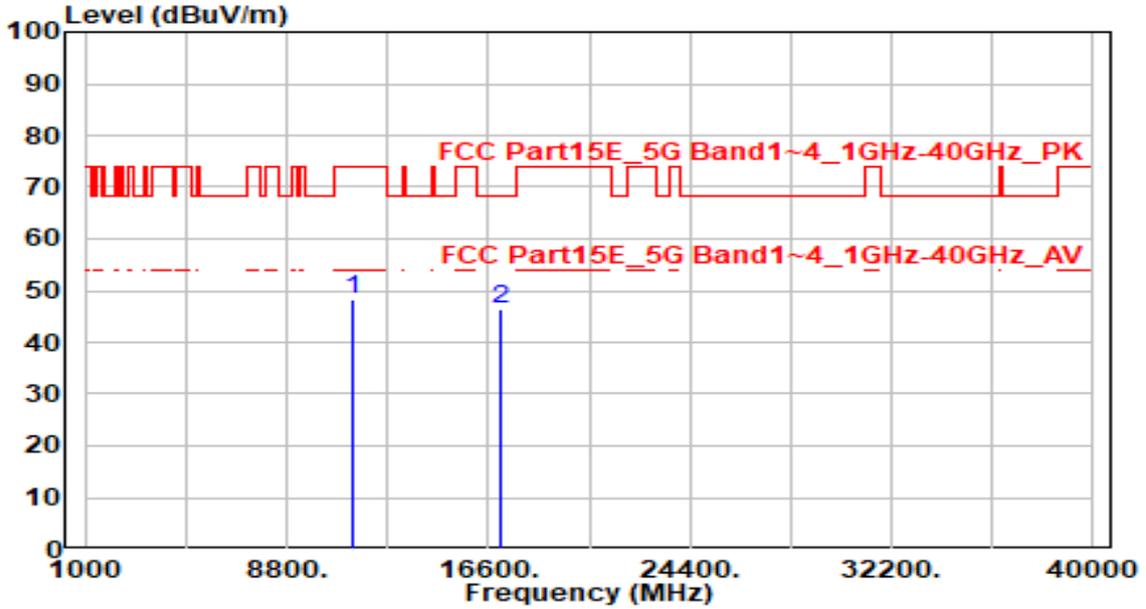


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.20	5.18	48.38	-25.62	74.00	300	95	Peak
2	* 17100.000	41.18	5.41	46.59	-21.61	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

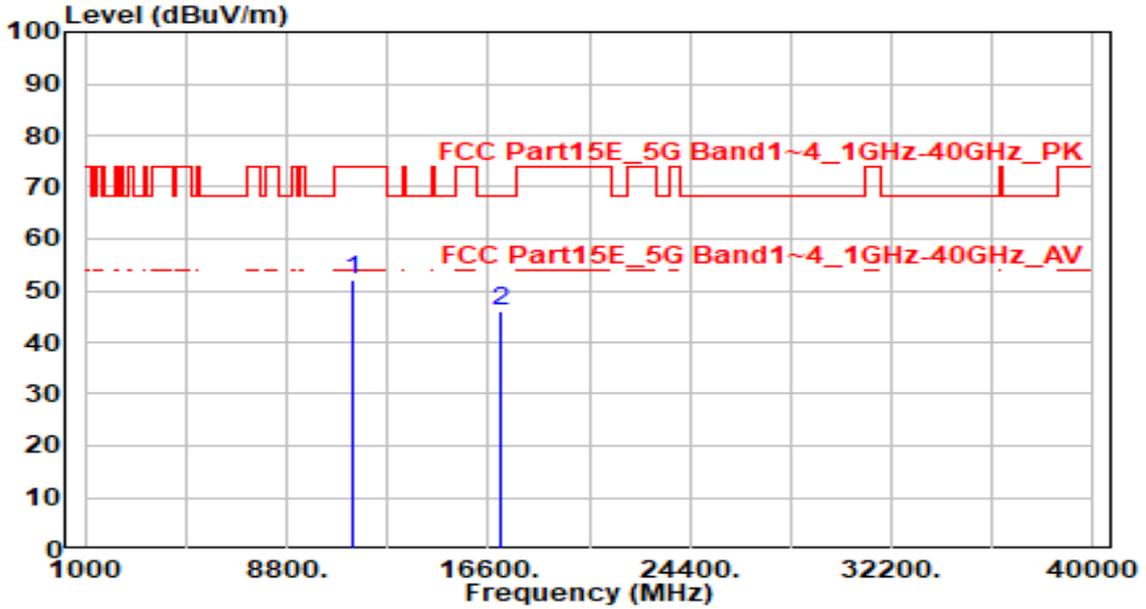


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11400.000	47.05	5.18	52.23	-21.77	74.00	200	200	Peak
2	17100.000	40.55	5.41	45.96	-22.24	68.20	200	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

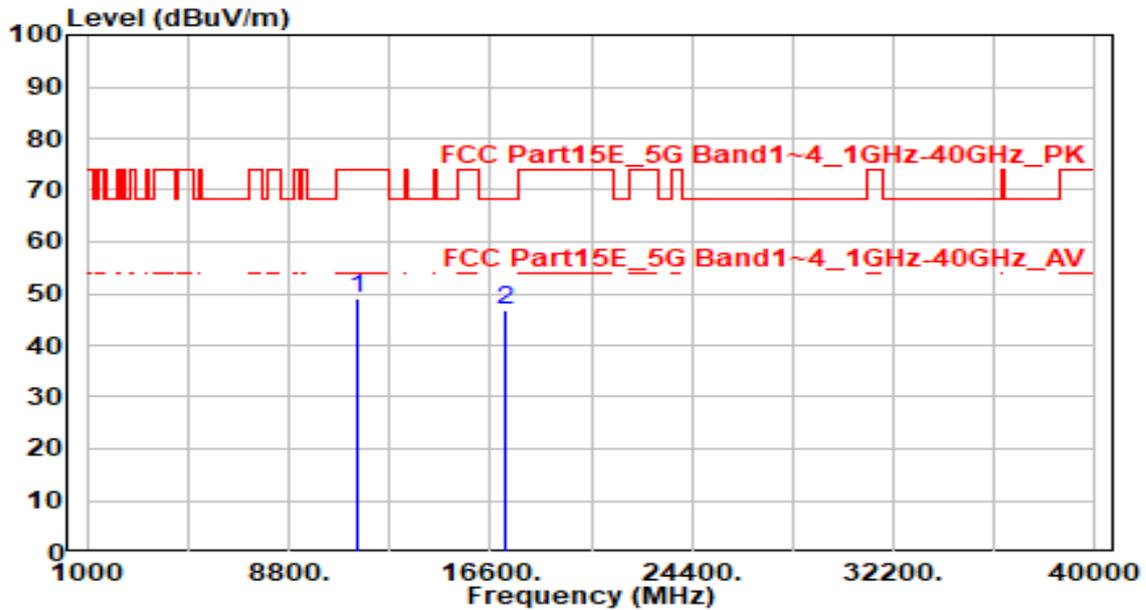


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.85	5.17	49.02	-24.98	74.00	300	95	Peak
2	* 17160.000	41.40	5.28	46.68	-21.52	68.20	300	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

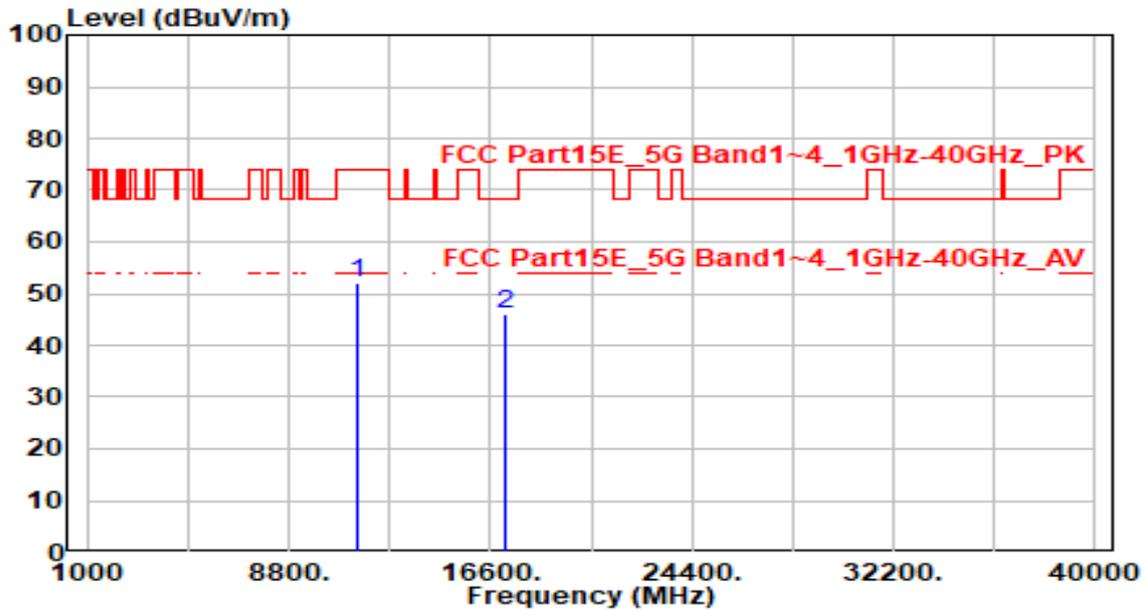


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11440.000	47.03	5.17	52.20	-21.80	74.00	300	205	Peak
2	17160.000	40.67	5.28	45.95	-22.25	68.20	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

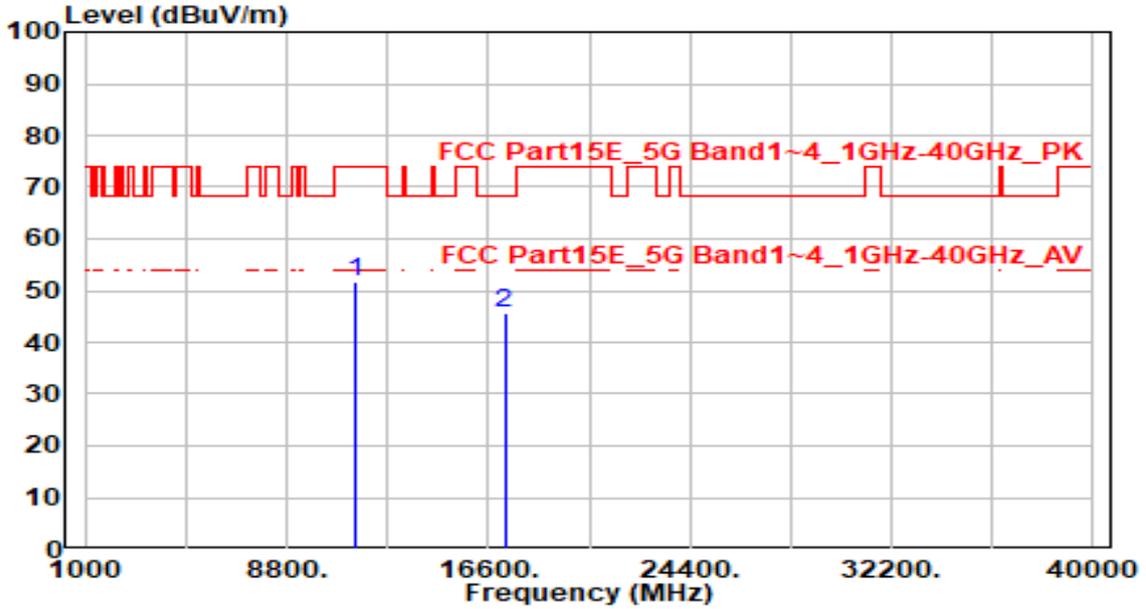


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	46.52	5.15	51.68	-22.32	74.00	300	170	Peak
2	17235.000	40.62	5.17	45.79	-22.41	68.20	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

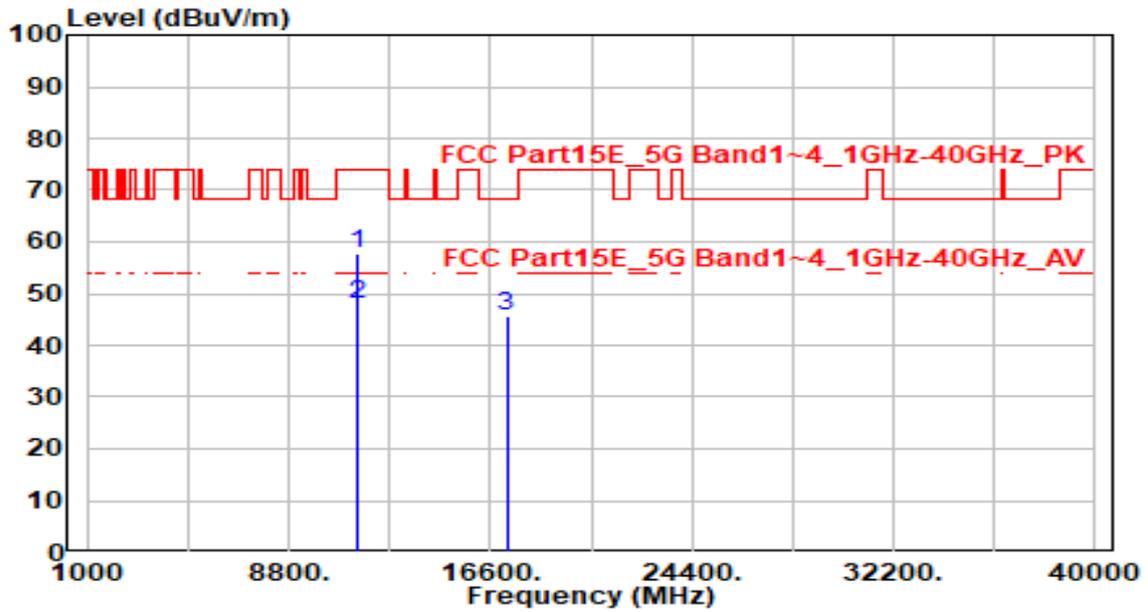


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	52.74	5.15	57.89	-16.11	74.00	245	185	Peak
2	* 11490.000	42.63	5.15	47.78	-6.22	54.00	245	185	Average
3	17235.000	40.53	5.17	45.70	-22.50	68.20	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

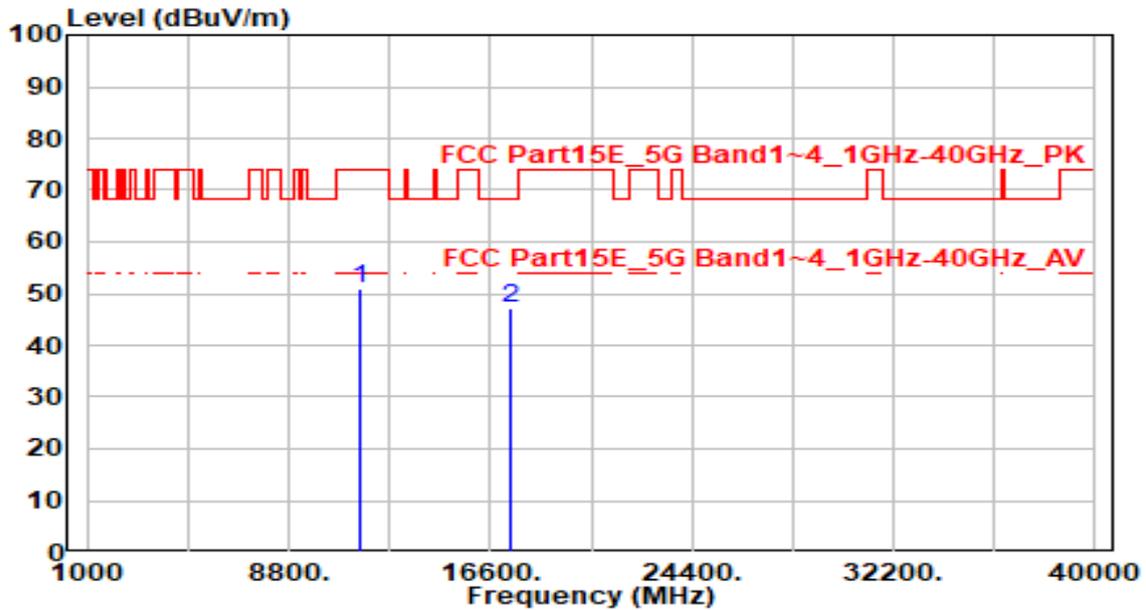


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.70	5.14	50.83	-23.17	74.00	300	0	Peak
2	* 17355.000	42.05	5.09	47.14	-21.06	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

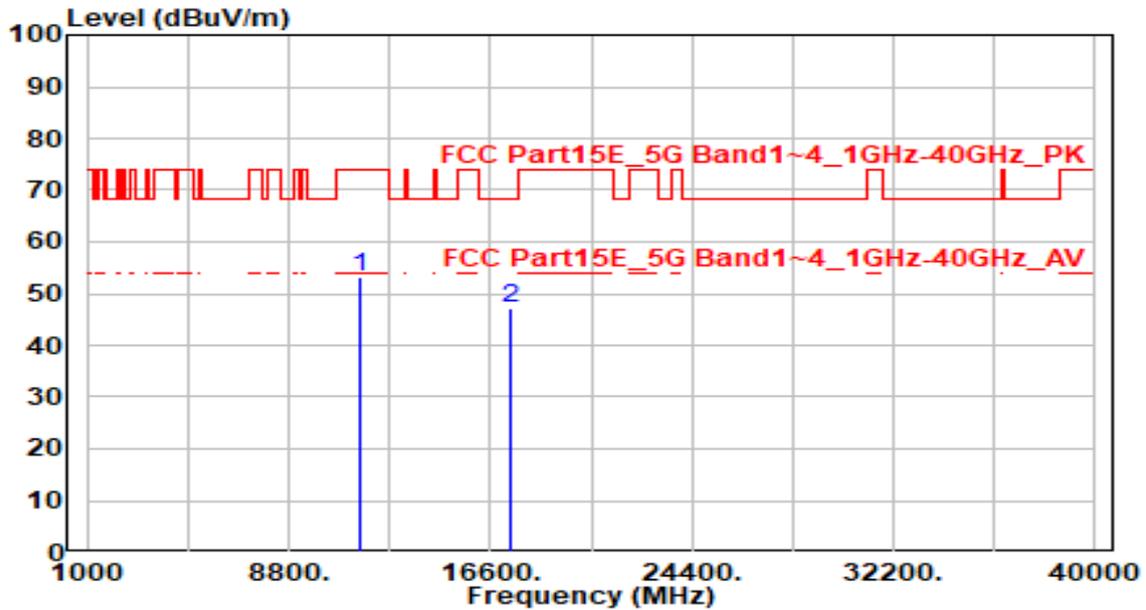


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	48.00	5.14	53.14	-20.86	74.00	200	0	Peak
2		42.19	5.09	47.29	-20.92	68.20	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

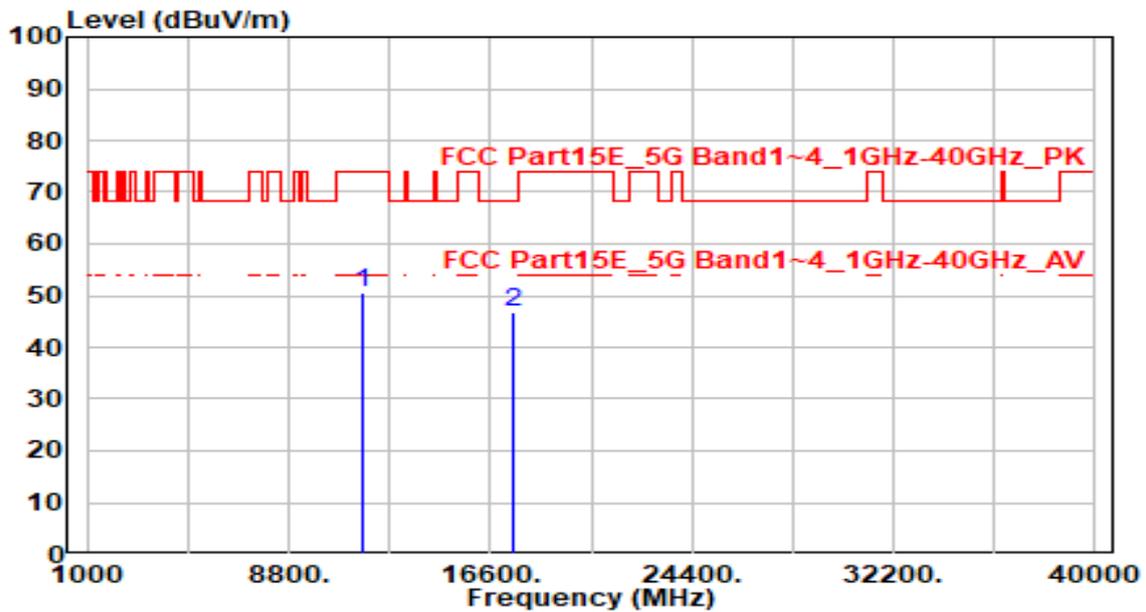


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.50	5.12	50.63	-23.37	74.00	300	180	Peak
2	* 17475.000	41.74	5.10	46.84	-21.36	68.20	300	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

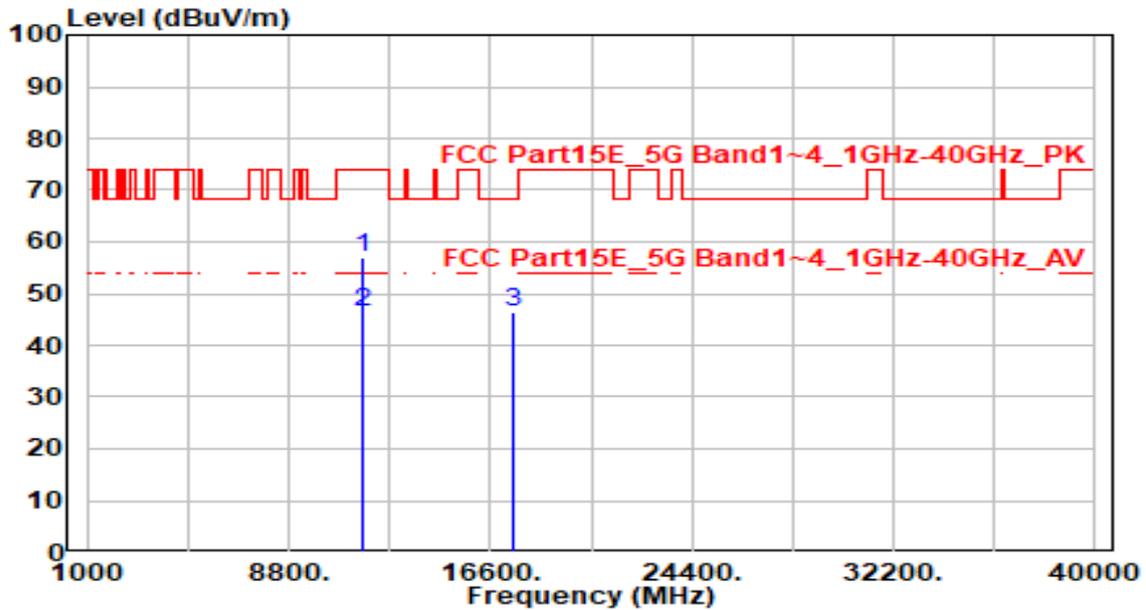


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	51.95	5.12	57.07	-16.93	74.00	205	200	Peak
2	* 11650.000	41.45	5.12	46.57	-7.43	54.00	205	200	Average
3	17475.000	41.37	5.10	46.47	-21.73	68.20	240	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

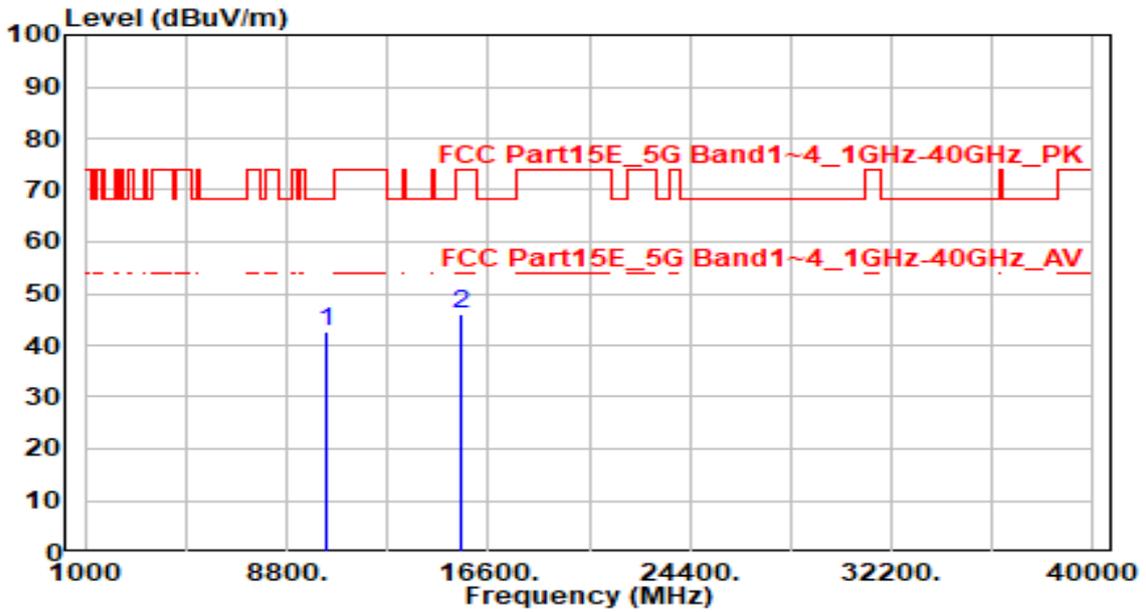


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	37.99	4.61	42.60	-25.60	68.20	200	225	Peak
2	15570.000	39.97	5.92	45.89	-28.11	74.00	200	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

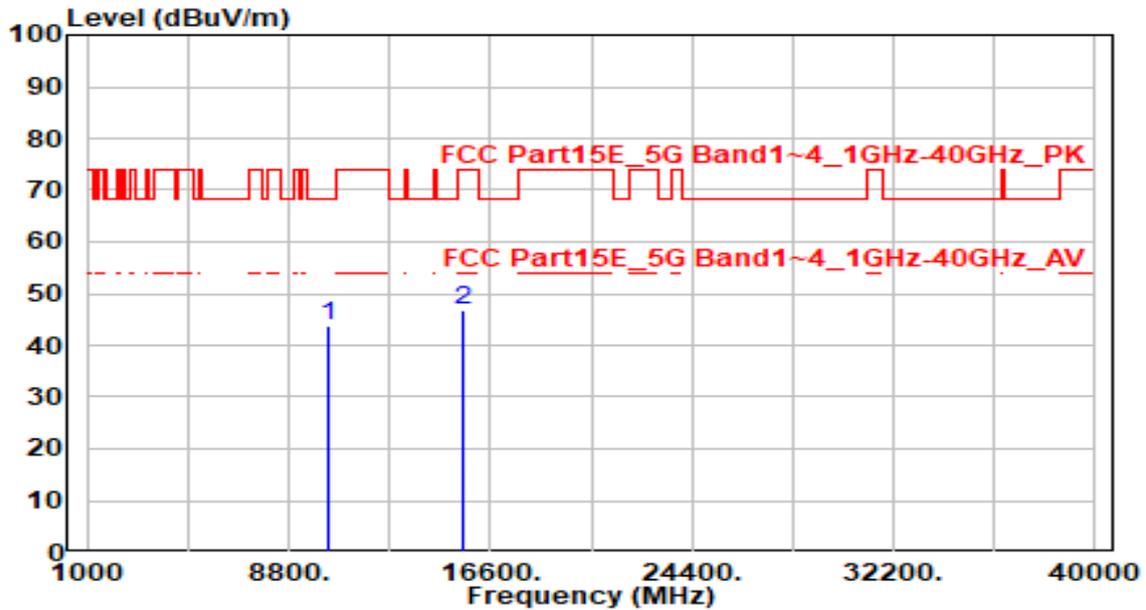


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	39.08	4.61	43.70	-24.50	68.20	200	135	Peak
2	15570.000	40.69	5.92	46.61	-27.39	74.00	200	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

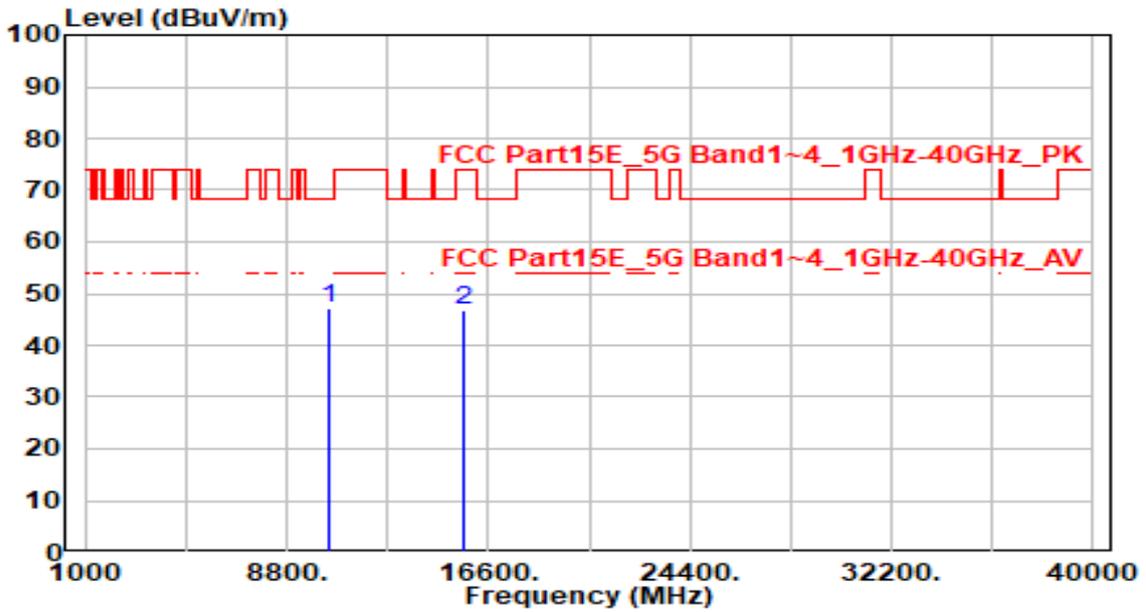


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	42.65	4.63	47.28	-20.92	68.20	200	180	Peak
2	15690.000	40.78	6.00	46.79	-27.21	74.00	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

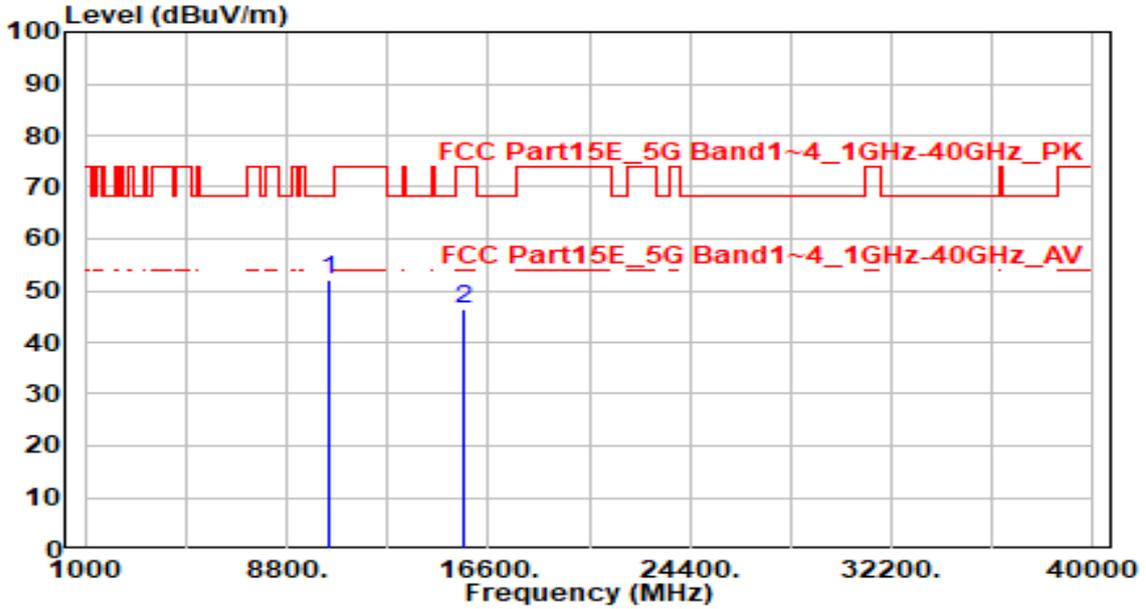


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	47.55	4.63	52.17	-16.03	68.20	200	260	Peak
2	15690.000	40.57	6.00	46.57	-27.43	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

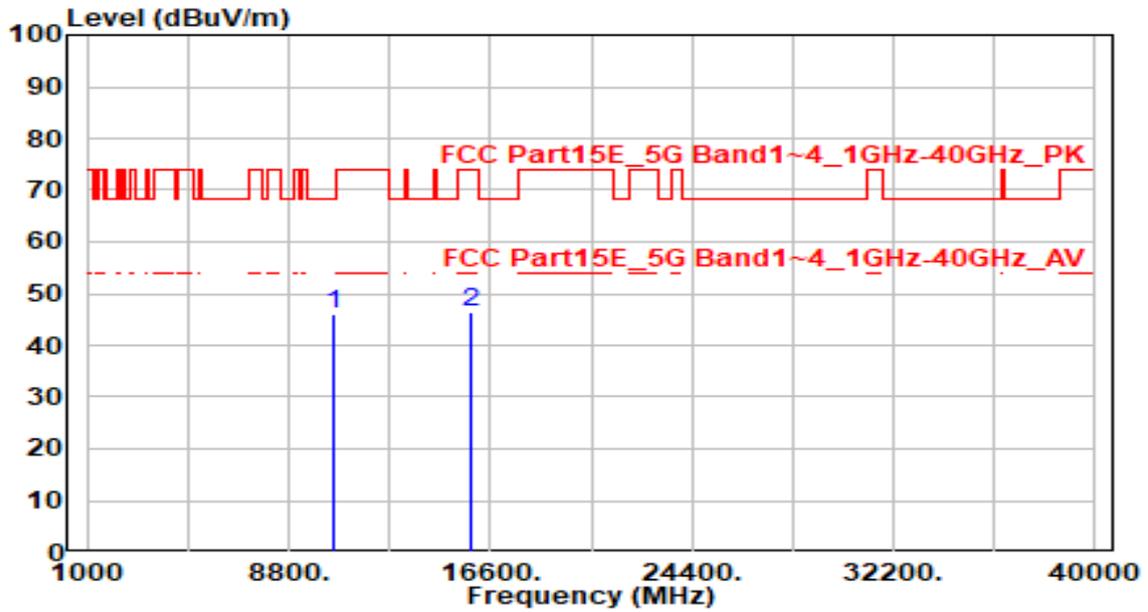


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	41.41	4.65	46.06	-22.14	68.20	200	200	Peak
2	15810.000	40.28	6.11	46.40	-27.60	74.00	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

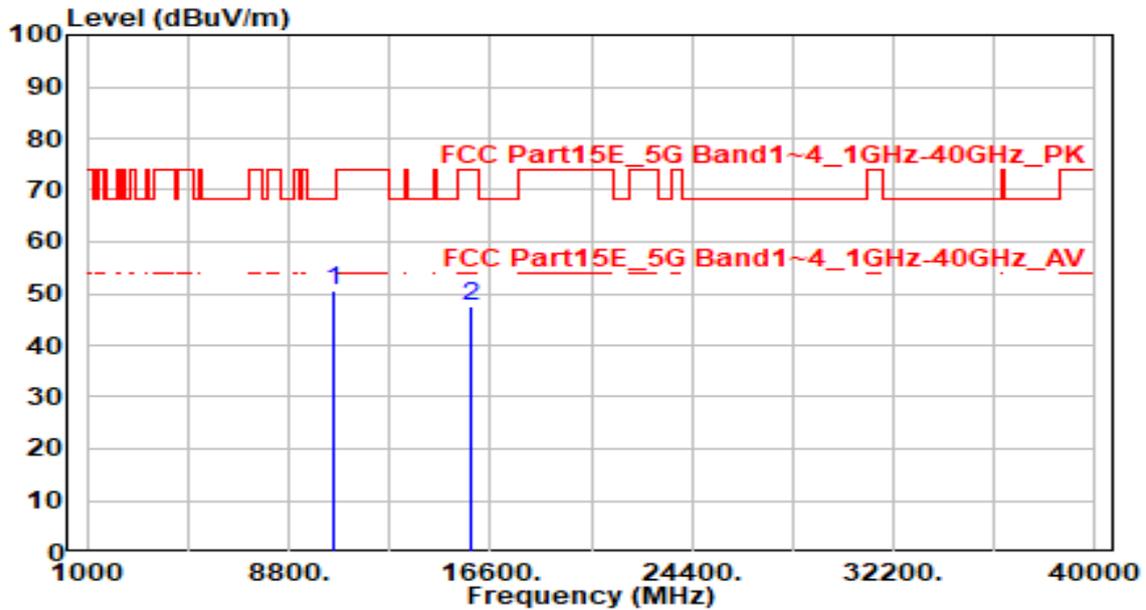


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	46.10	4.65	50.75	-17.45	68.20	200	200	Peak
2	15810.000	41.38	6.11	47.50	-26.50	74.00	200	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

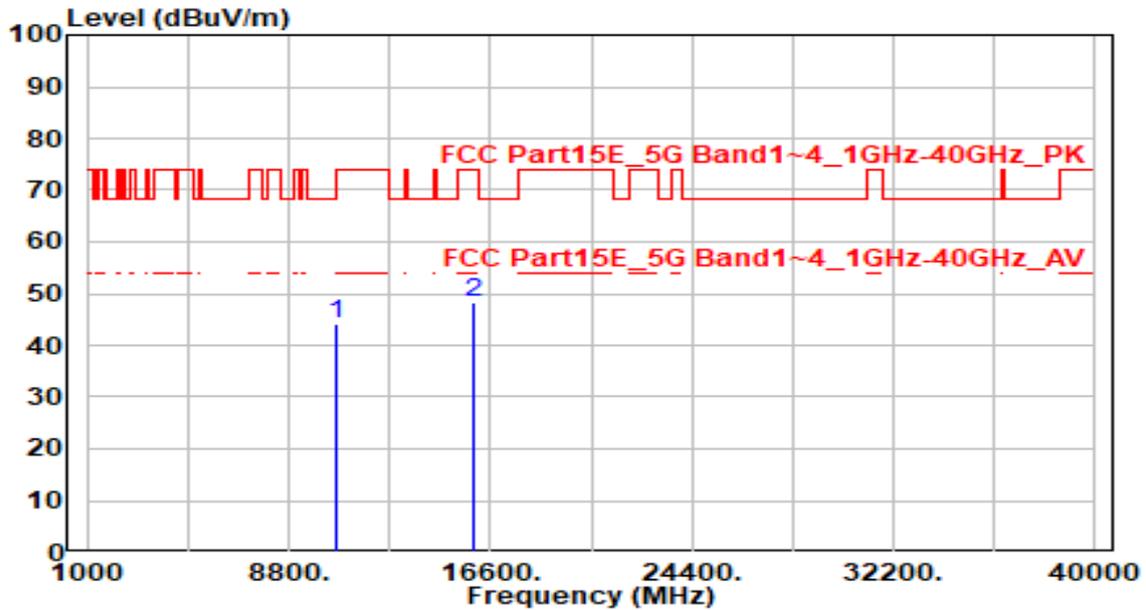


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	39.61	4.66	44.26	-29.74	74.00	200	90	Peak
2	* 15930.000	41.86	6.28	48.15	-25.85	74.00	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

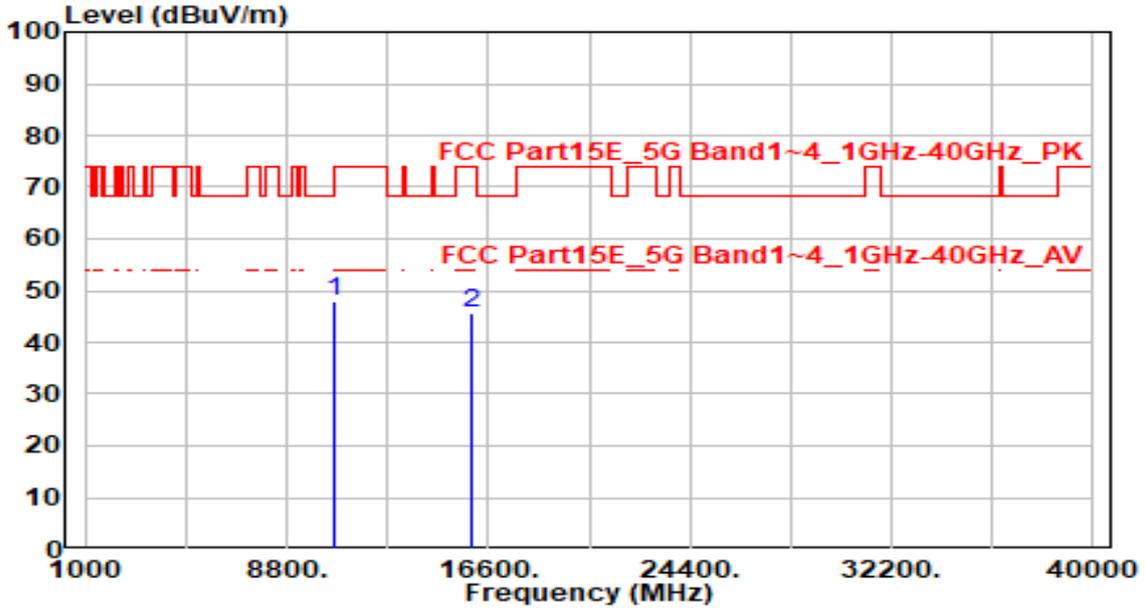


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10620.000	43.27	4.66	47.93	-26.07	74.00	200	200	Peak
2	15930.000	39.53	6.28	45.81	-28.19	74.00	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

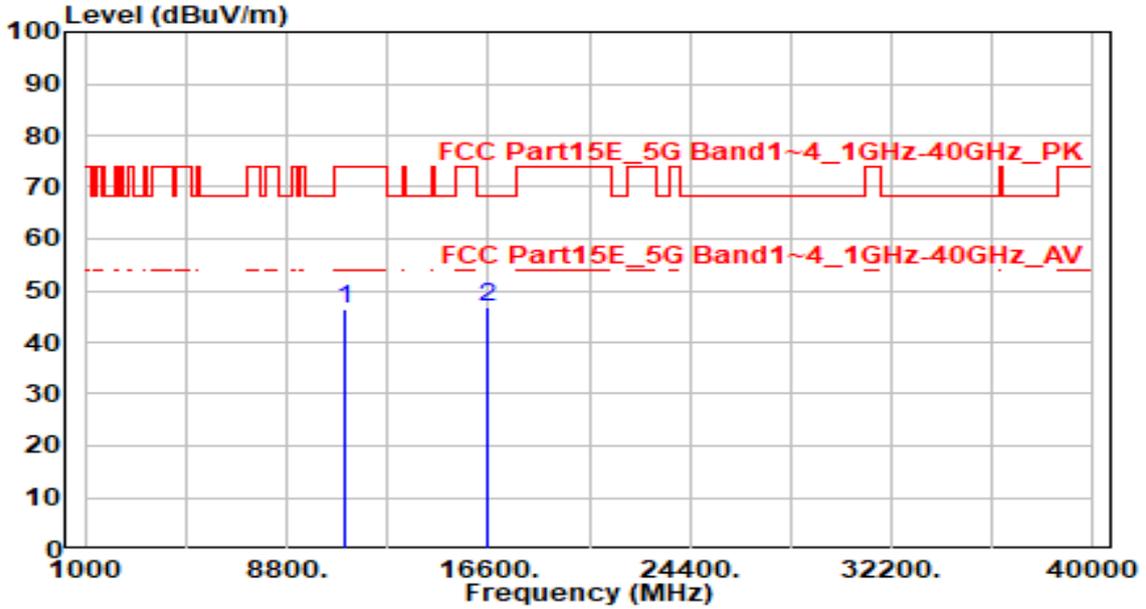


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.46	4.77	46.23	-27.77	74.00	200	235	Peak
2	* 16530.000	39.95	6.90	46.85	-21.35	68.20	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

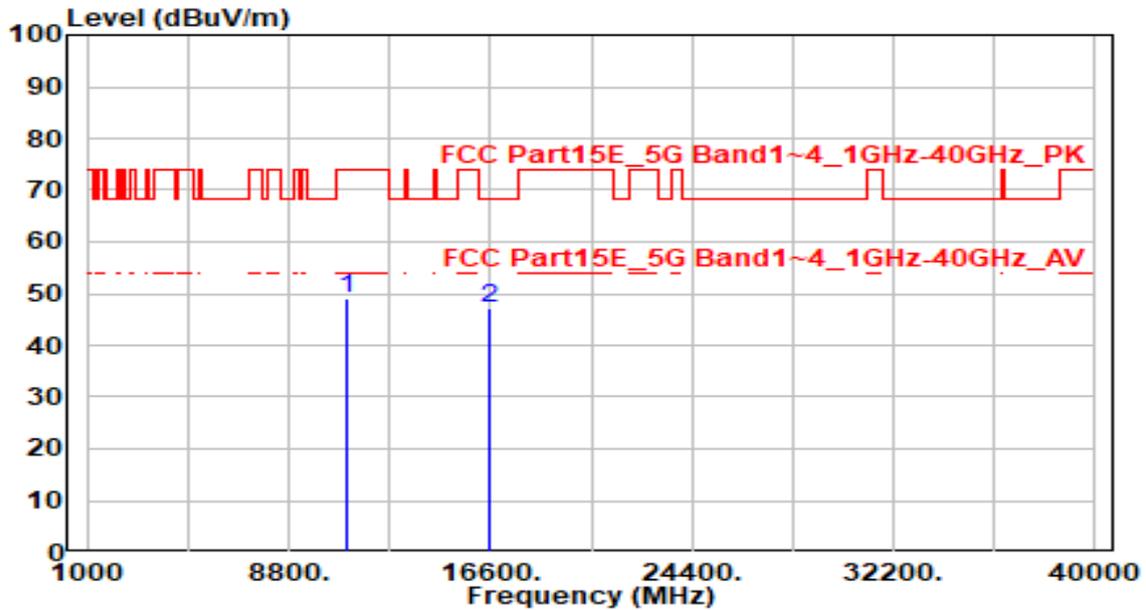


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	44.40	4.77	49.18	-24.82	74.00	200	125	Peak
2	* 16530.000	40.44	6.90	47.34	-20.86	68.20	200	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

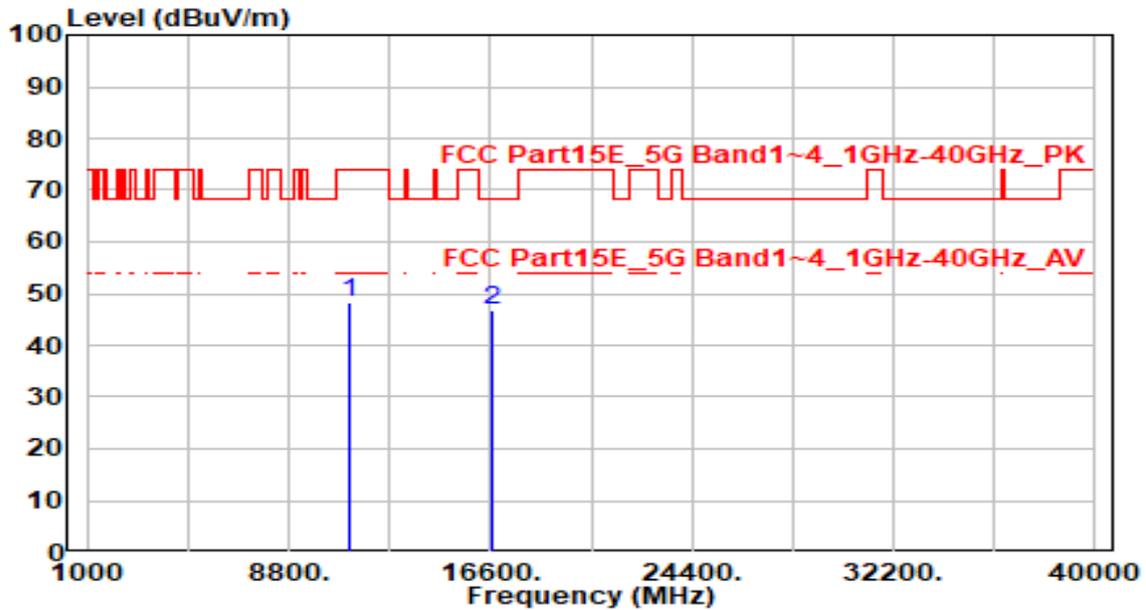


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11110.000	43.42	4.92	48.34	-25.66	74.00	200	205	Peak
2	* 16650.000	39.80	7.06	46.86	-21.34	68.20	200	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

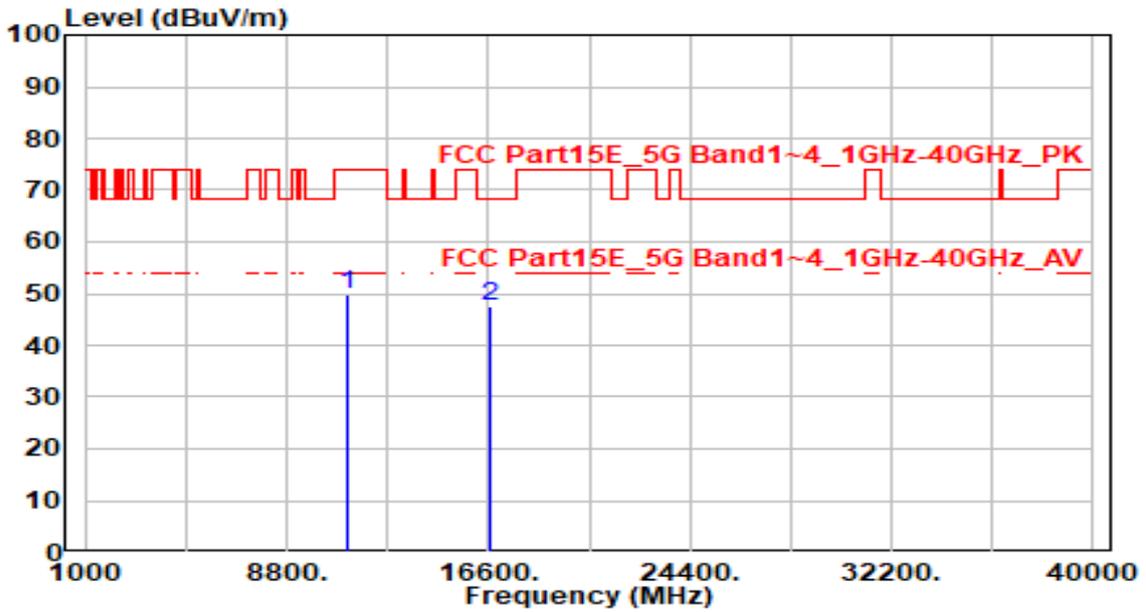


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11110.000	44.83	4.92	49.74	-24.26	74.00	200	130	Peak
2	* 16650.000	40.46	7.06	47.52	-20.68	68.20	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

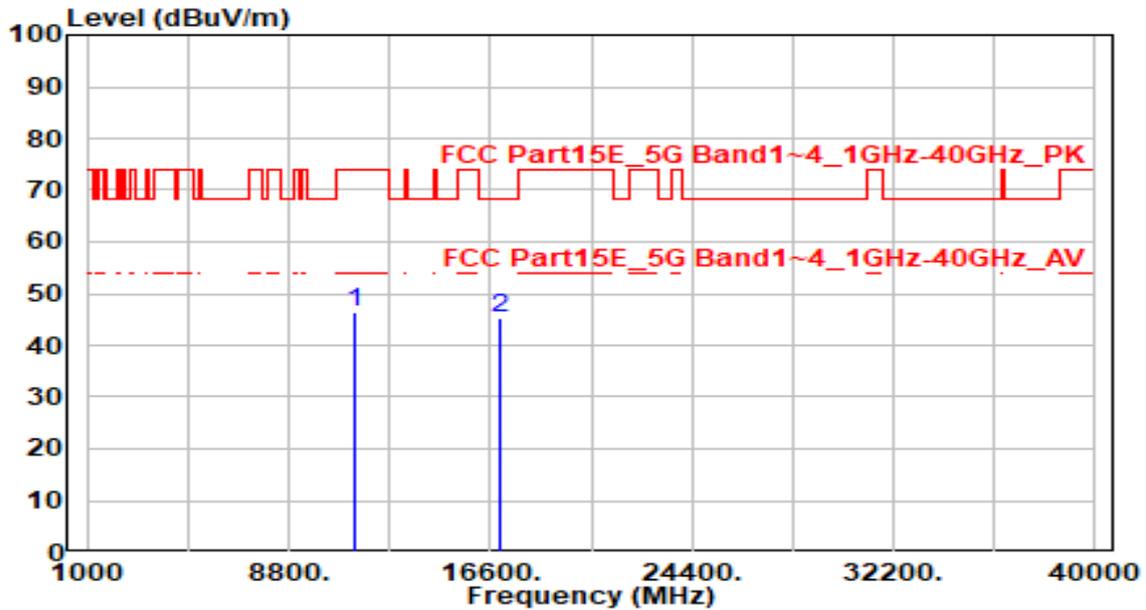


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.28	5.14	46.43	-27.57	74.00	200	65	Peak
2	* 17010.000	39.60	5.59	45.19	-23.01	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

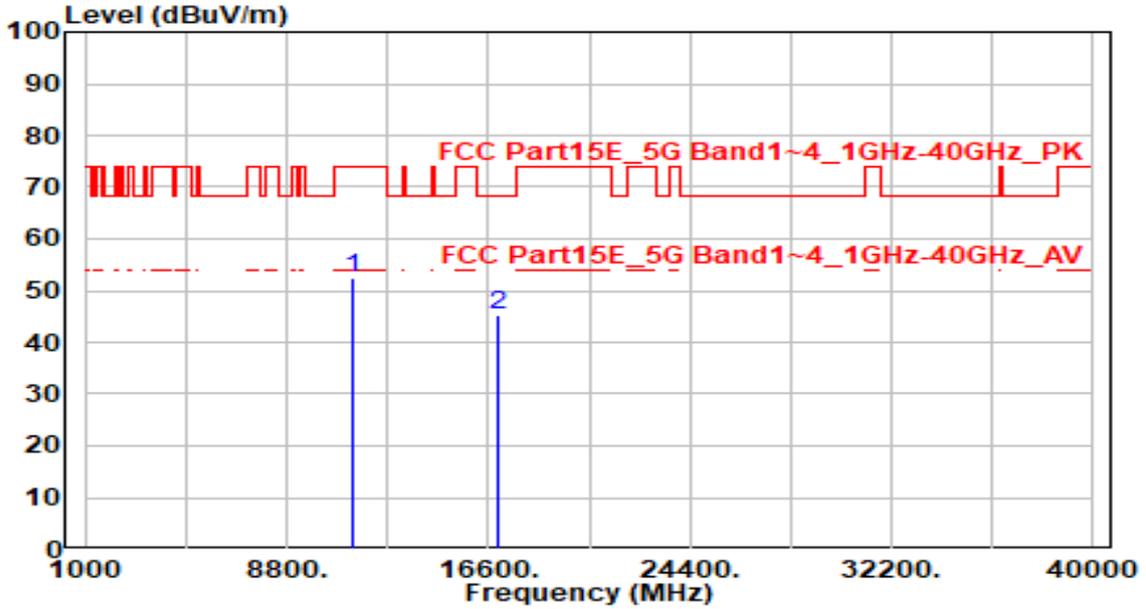


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11340.000	47.13	5.14	52.27	-21.73	74.00	200	205	Peak
2	17010.000	39.76	5.59	45.35	-22.85	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

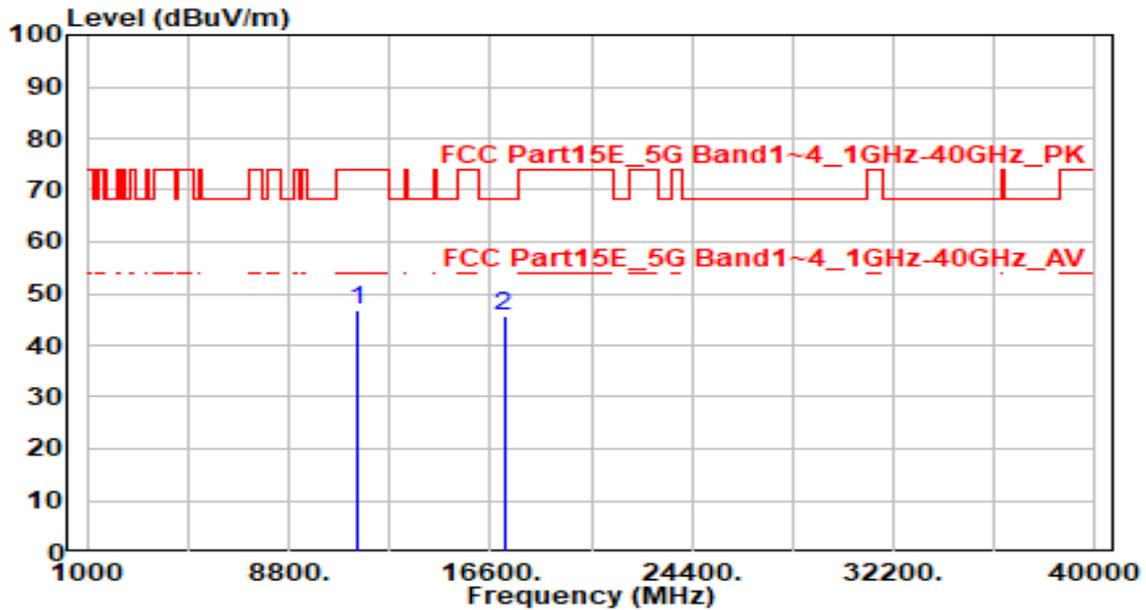


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.56	5.18	46.73	-27.27	74.00	200	190	Peak
2	* 17130.000	40.41	5.35	45.76	-22.44	68.20	200	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

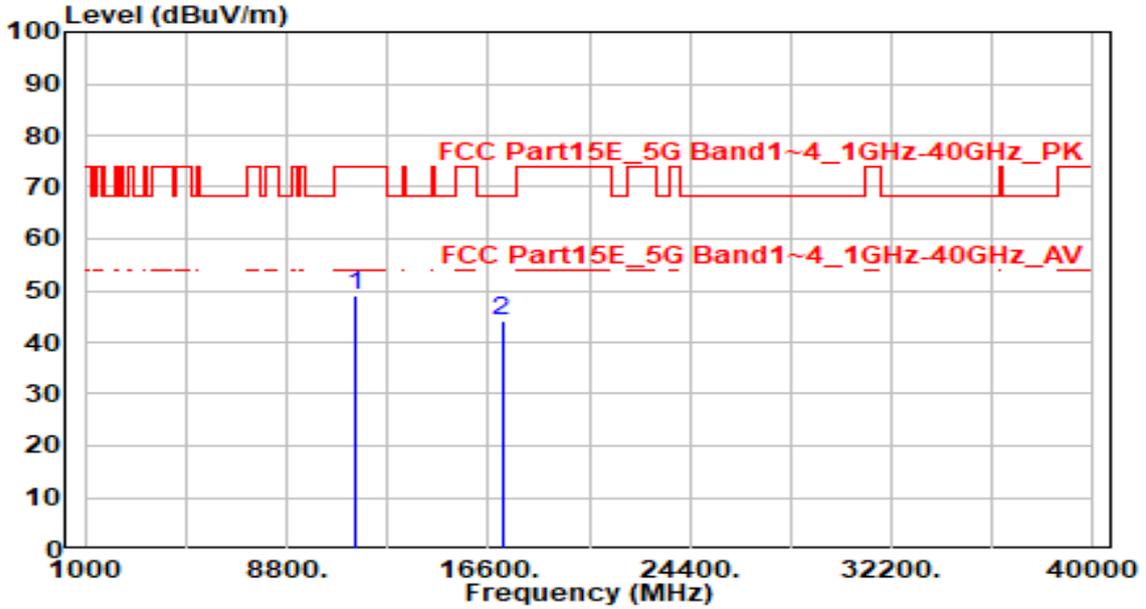


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	43.91	5.18	49.08	-24.92	74.00	200	175	Peak
2	* 17130.000	38.78	5.35	44.13	-24.07	68.20	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

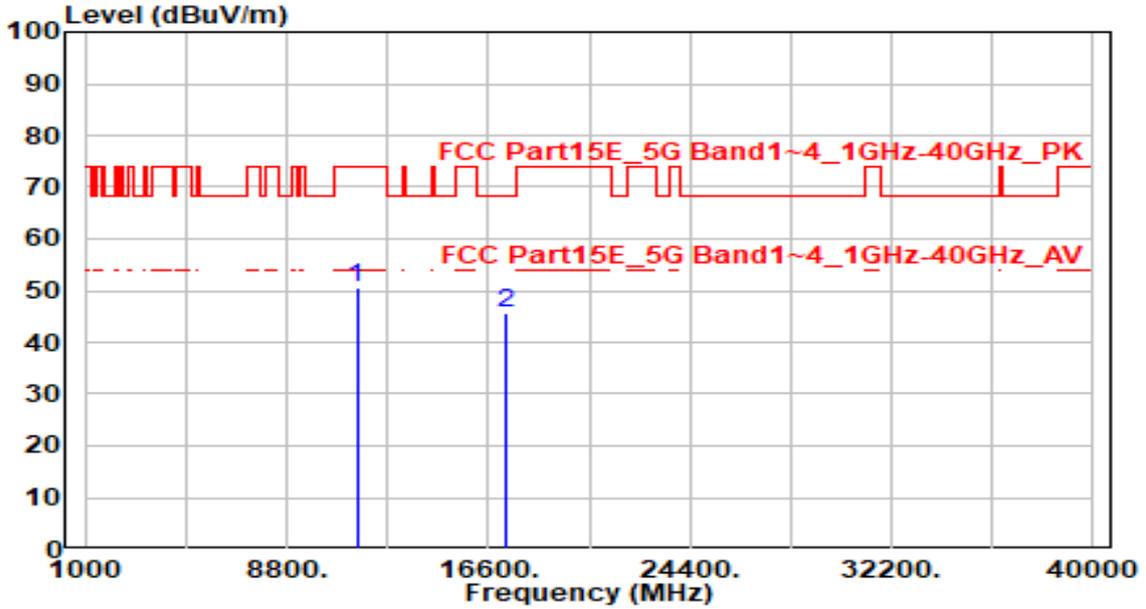


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	45.52	5.15	50.67	-23.33	74.00	200	205	Peak
2	* 17265.000	40.40	5.15	45.55	-22.65	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

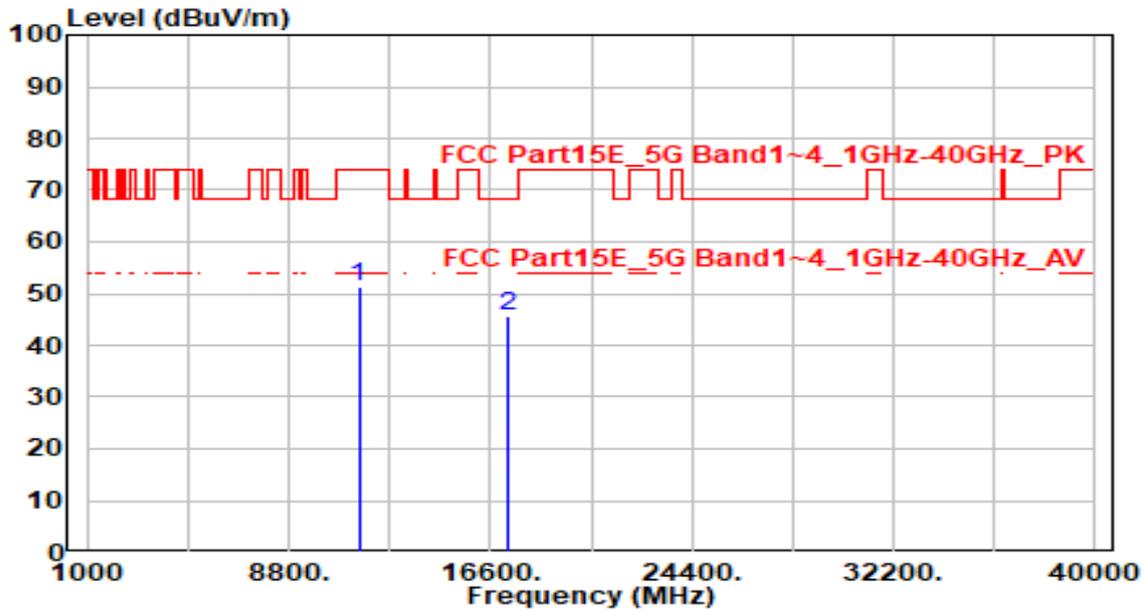


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.14	5.15	51.29	-22.71	74.00	200	50	Peak
2	* 17265.000	40.34	5.15	45.49	-22.71	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

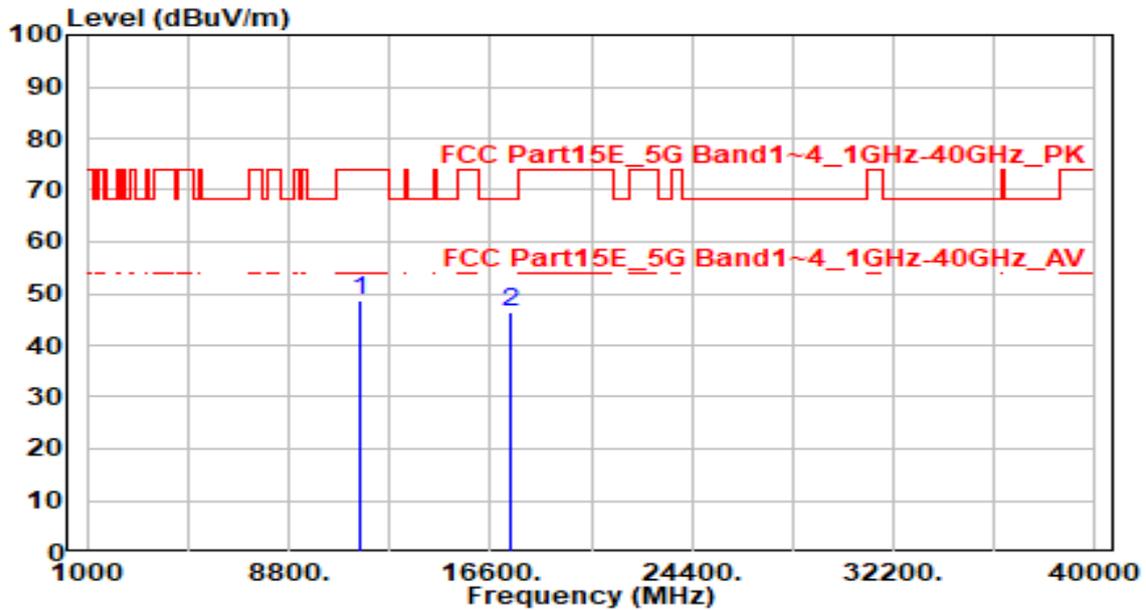


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.56	5.13	48.69	-25.31	74.00	200	185	Peak
2	* 17385.000	41.48	5.07	46.55	-21.65	68.20	200	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

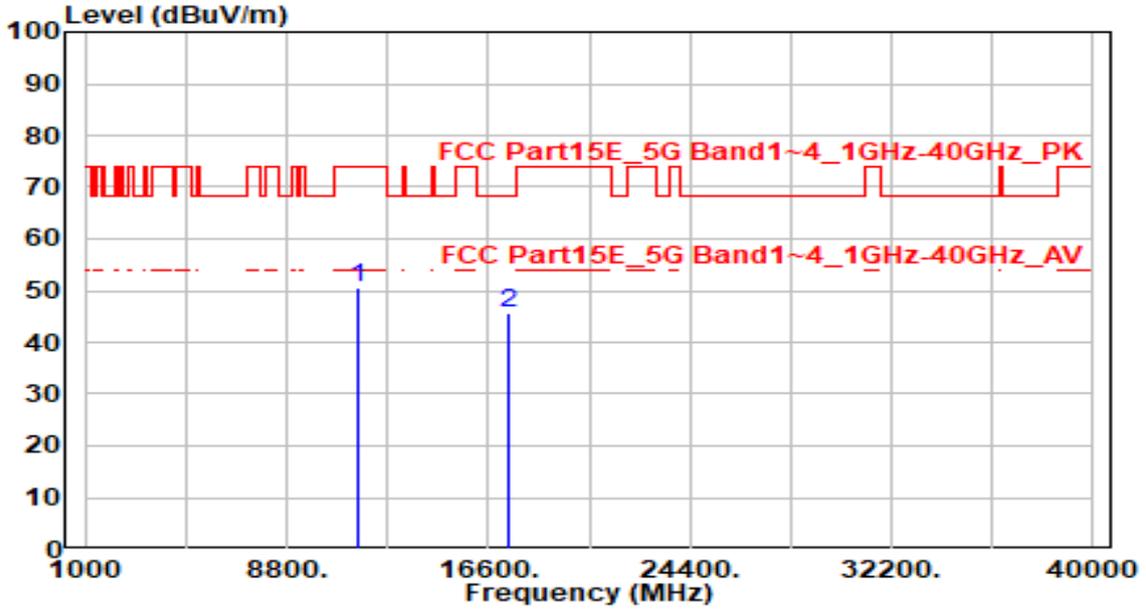


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	45.45	5.13	50.58	-23.42	74.00	200	205	Peak
2	* 17385.000	40.53	5.07	45.60	-22.60	68.20	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

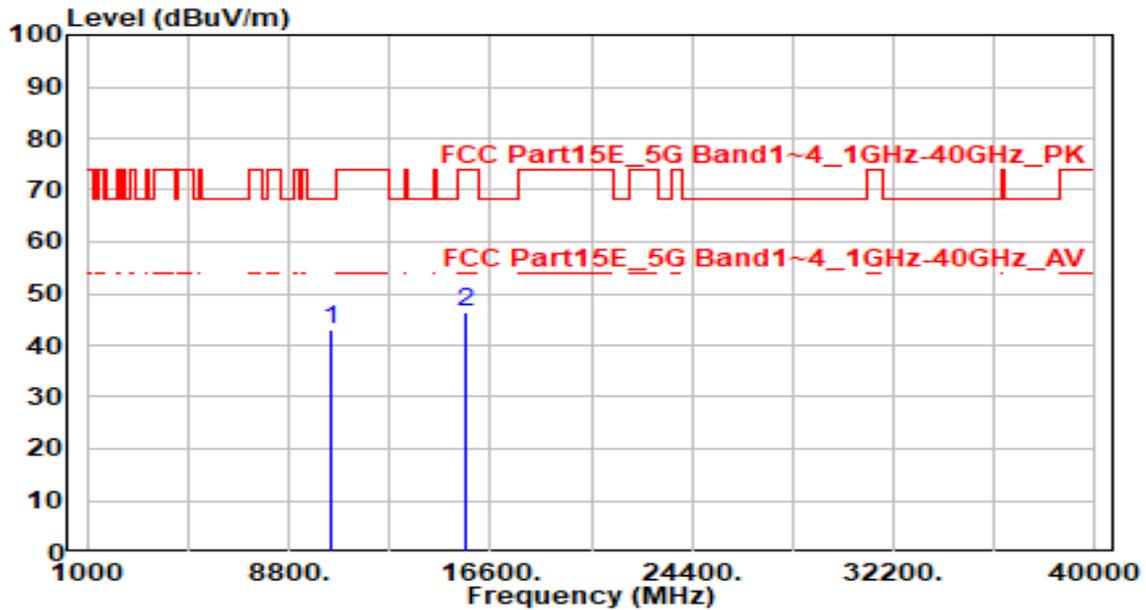


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	38.22	4.61	42.83	-25.37	68.20	200	0	Peak
2	15630.000	40.46	5.95	46.41	-27.59	74.00	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

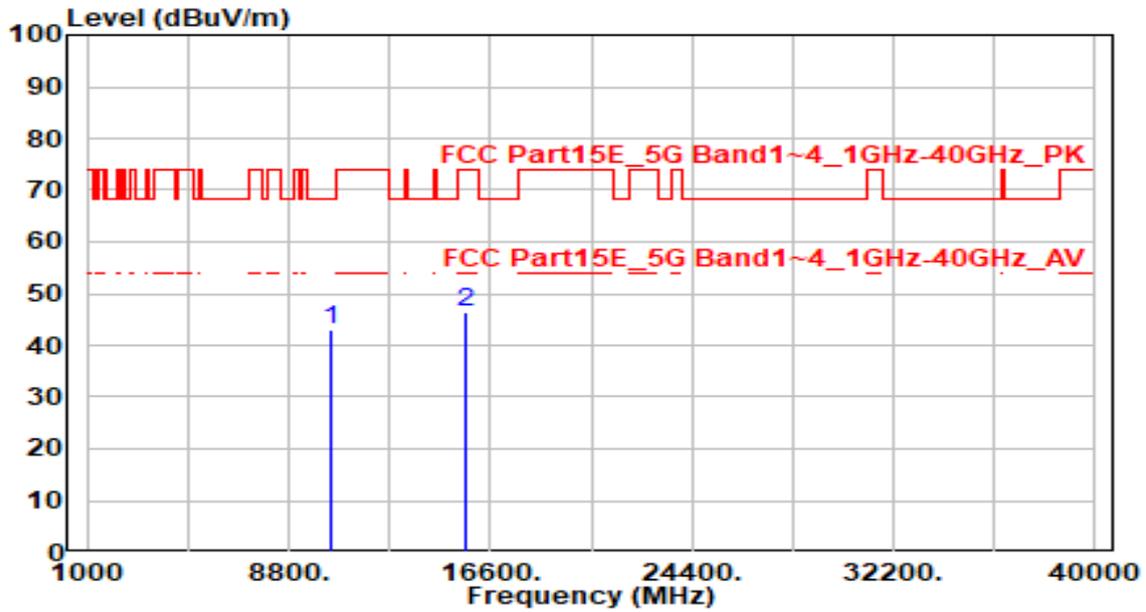


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	38.45	4.61	43.06	-25.14	68.20	200	350	Peak
2	15630.000	40.57	5.95	46.52	-27.48	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

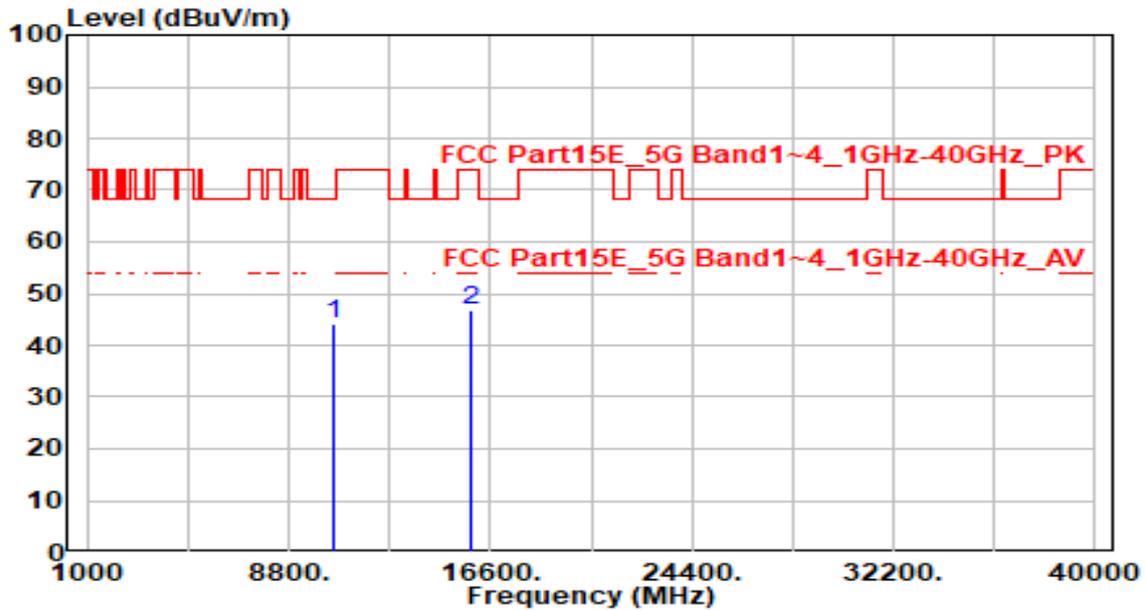


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	39.67	4.66	44.32	-23.88	68.20	300	200	Peak
2	15870.000	40.53	6.20	46.73	-27.27	74.00	300	110	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

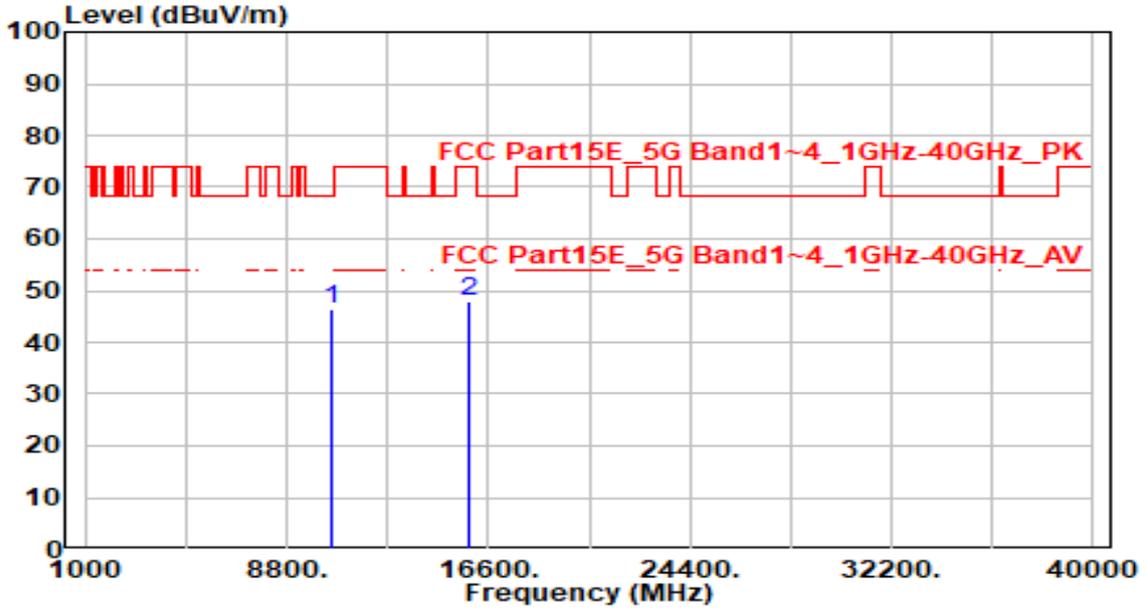


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.72	4.66	46.38	-21.82	68.20	200	0	Peak
2	15870.000	41.72	6.20	47.91	-26.09	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

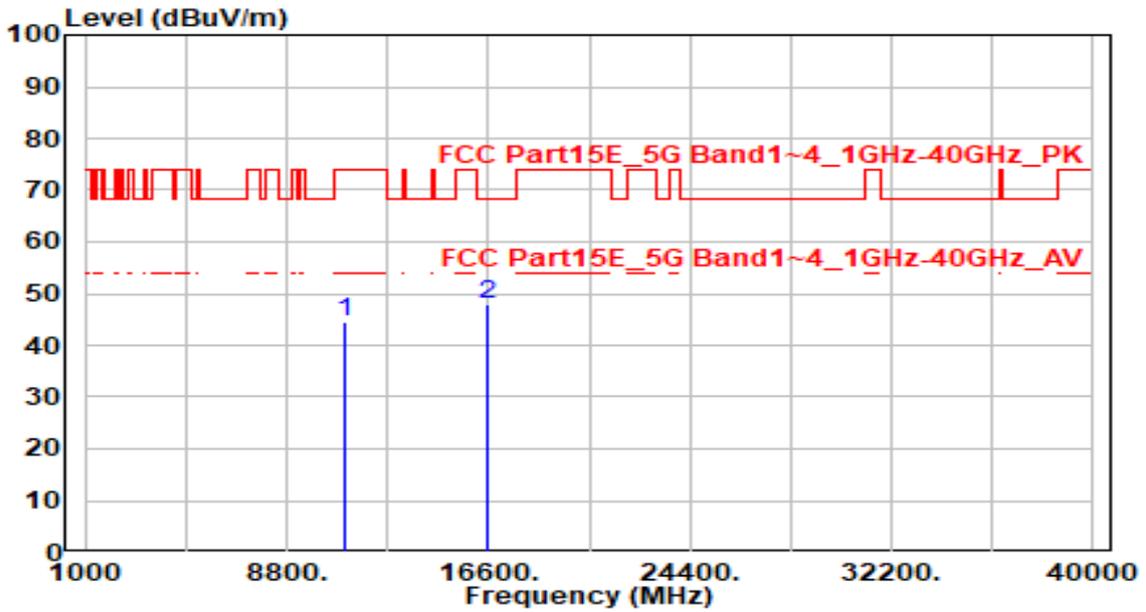


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	39.83	4.84	44.67	-29.33	74.00	300	185	Peak
2	* 16590.000	40.94	6.97	47.91	-20.29	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

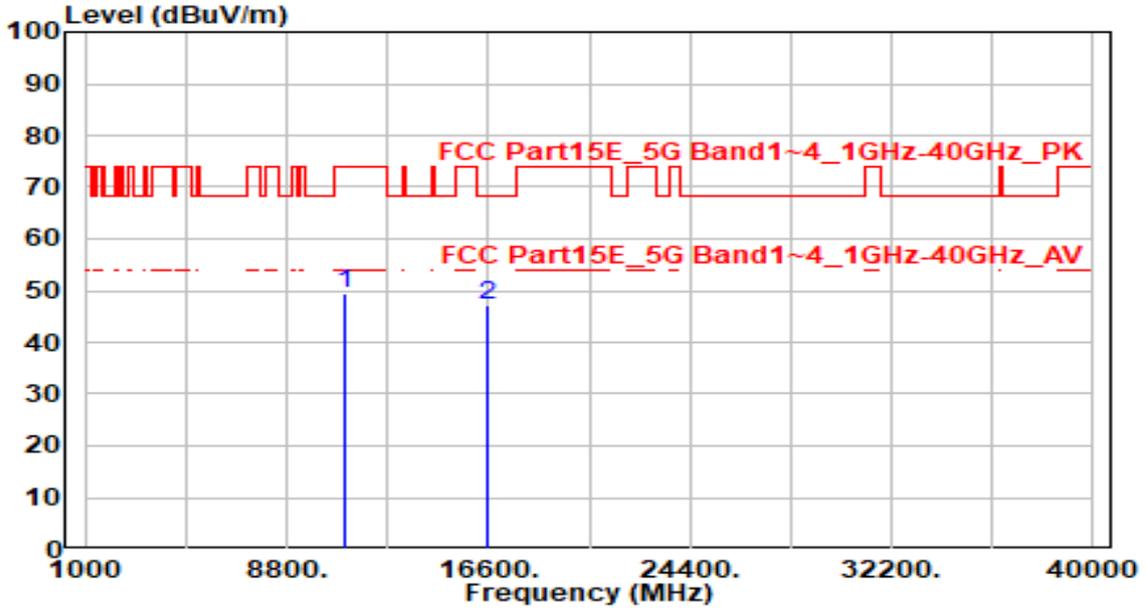


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	44.62	4.84	49.46	-24.54	74.00	235	360	Peak
2	* 16590.000	40.33	6.97	47.30	-20.90	68.20	300	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

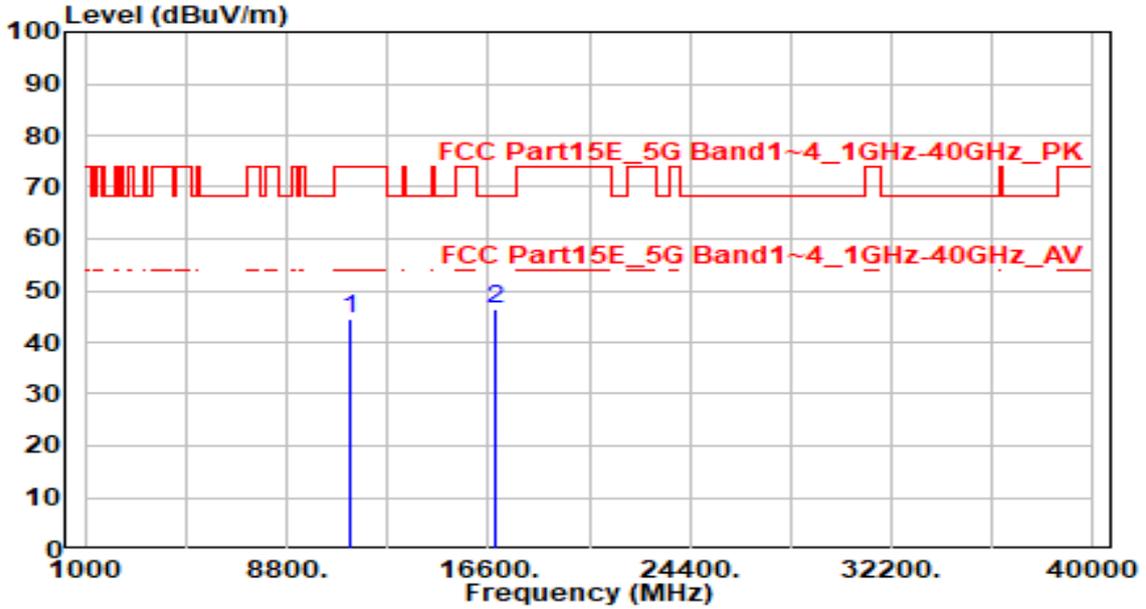


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	39.39	5.07	44.47	-29.53	74.00	200	205	Peak
2	* 16830.000	39.78	6.58	46.36	-21.84	68.20	200	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

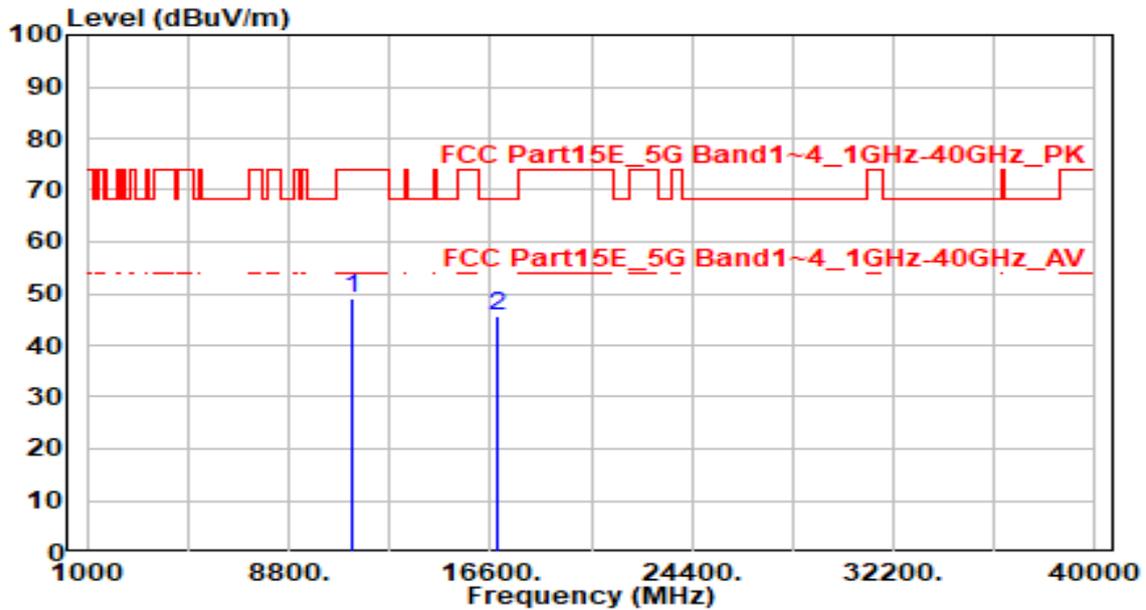


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	44.06	5.07	49.13	-24.87	74.00	200	40	Peak
2	* 16830.000	39.01	6.58	45.60	-22.60	68.20	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

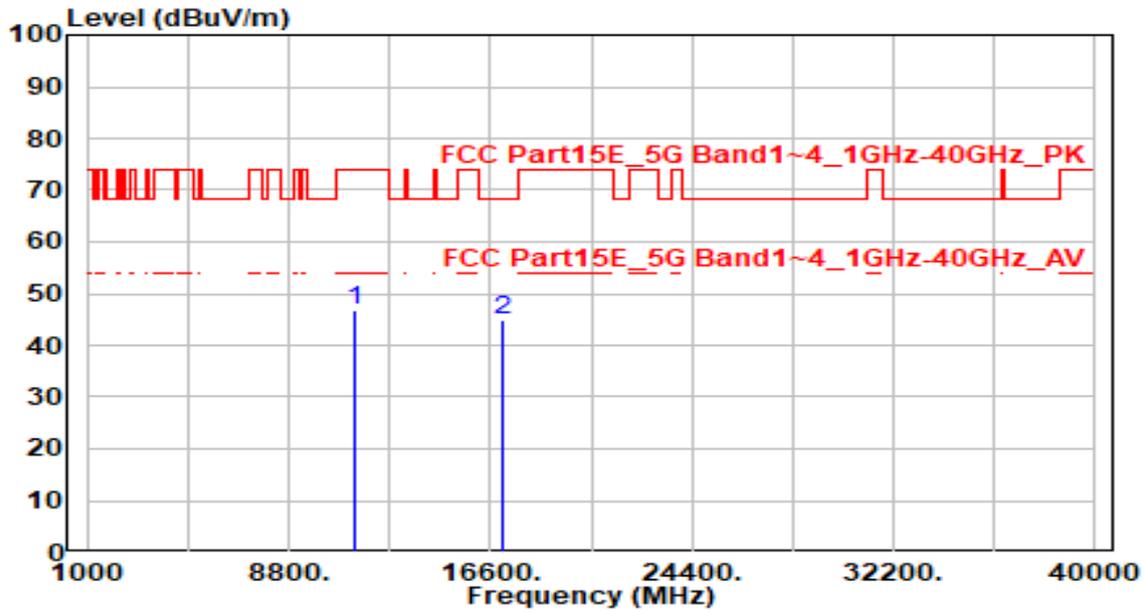


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.58	5.17	46.75	-27.25	74.00	200	185	Peak
2	* 17070.000	39.55	5.47	45.02	-23.18	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

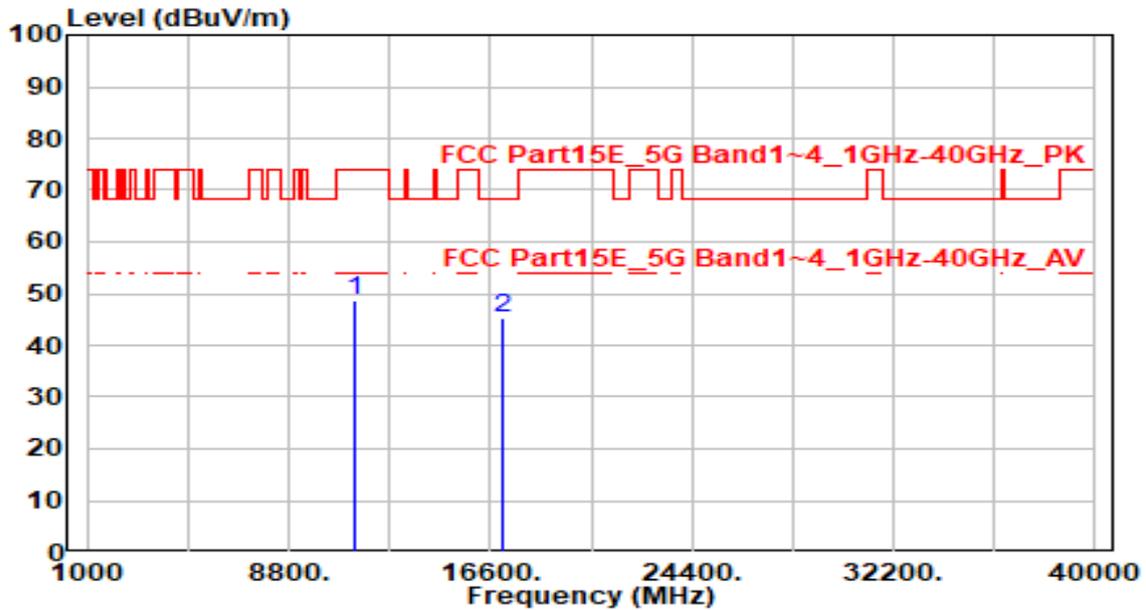


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	43.62	5.17	48.79	-25.21	74.00	200	115	Peak
2	* 17070.000	39.77	5.47	45.24	-22.96	68.20	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

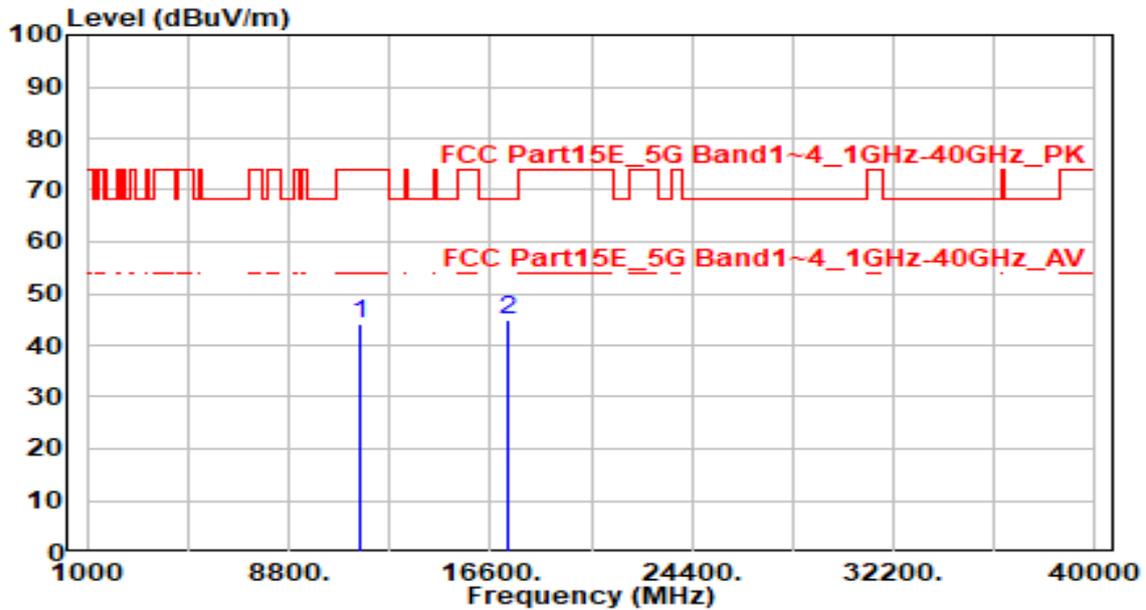


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	39.05	5.14	44.18	-29.82	74.00	200	195	Peak
2	* 17325.000	39.88	5.11	44.99	-23.21	68.20	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

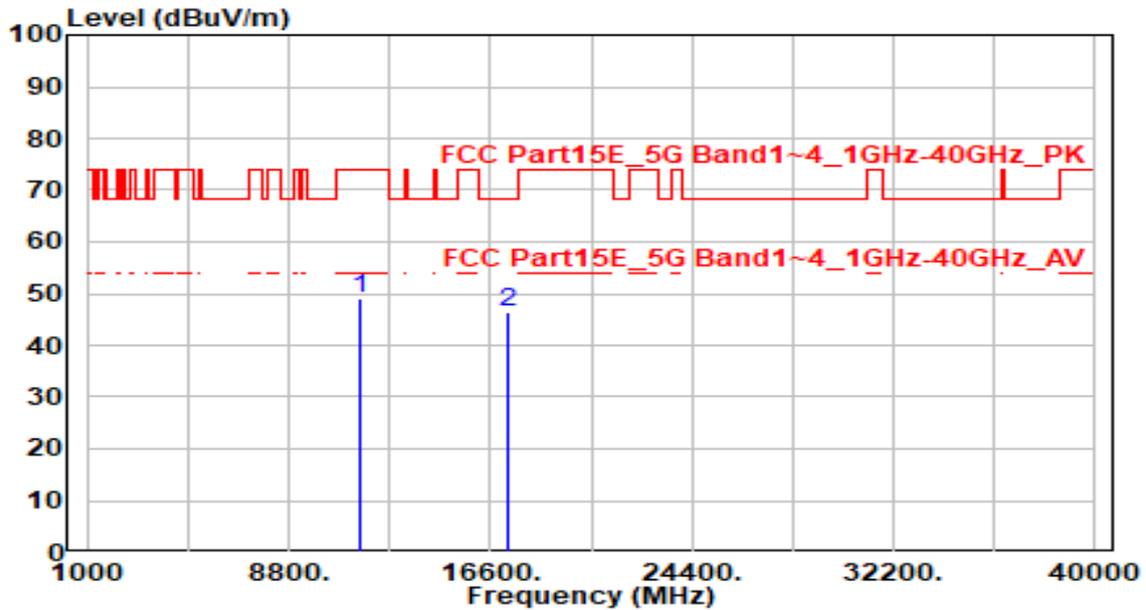


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	43.92	5.14	49.06	-24.94	74.00	200	355	Peak
2	* 17325.000	41.16	5.11	46.27	-21.93	68.20	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_TX_Band1&2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

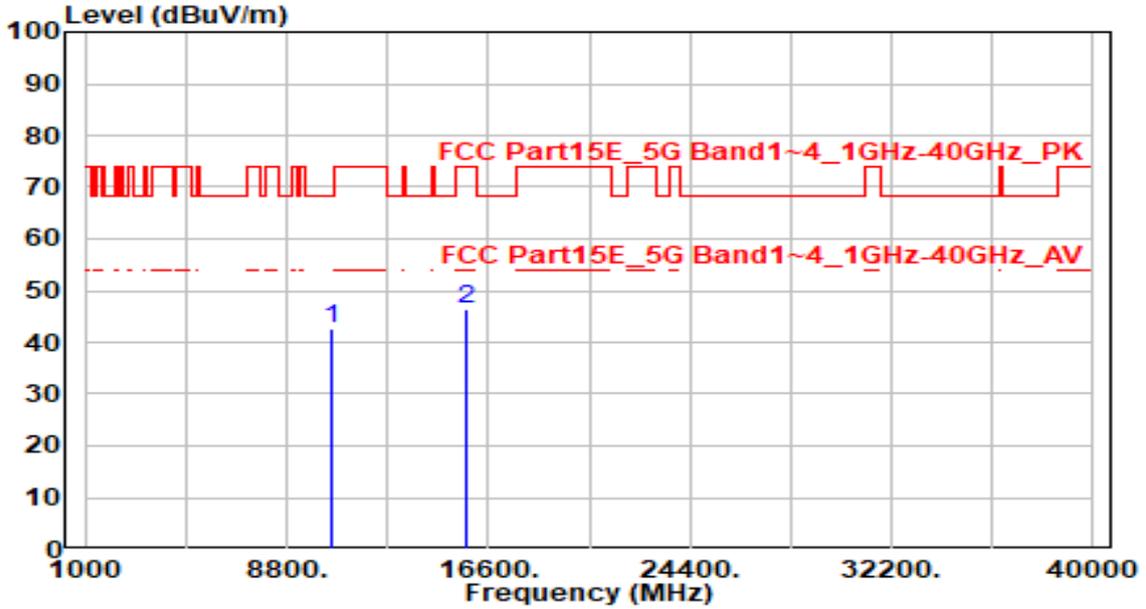


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	37.98	4.64	42.62	-25.58	68.20	300	325	Peak
2	15750.000	40.35	6.05	46.41	-27.59	74.00	300	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_TX_Band1&2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

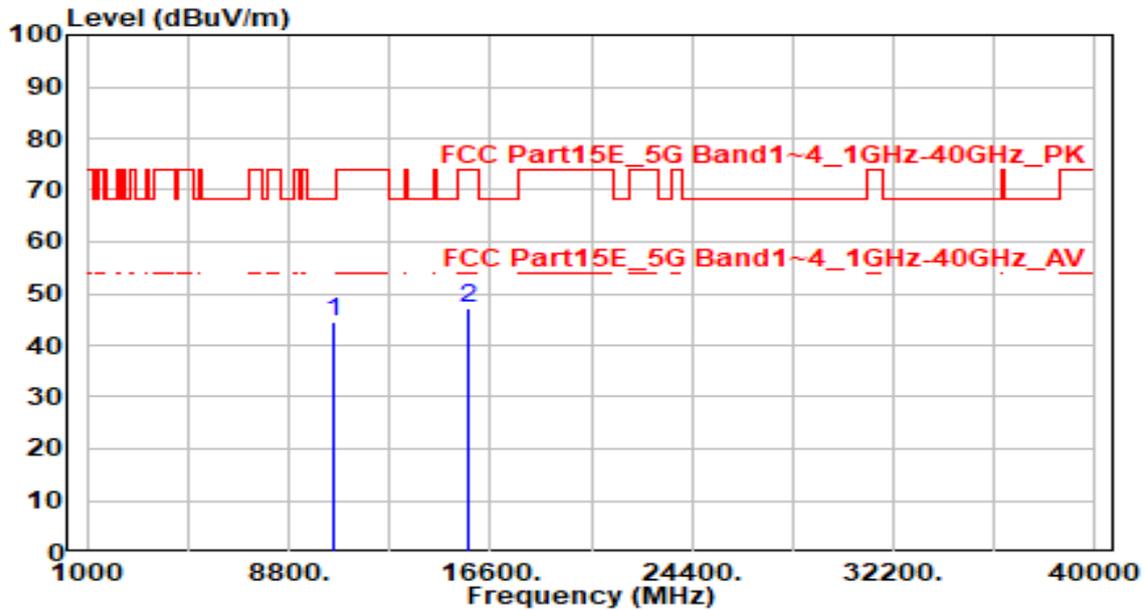


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	39.87	4.64	44.50	-23.70	68.20	300	155	Peak
2	15750.000	40.97	6.05	47.03	-26.97	74.00	300	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

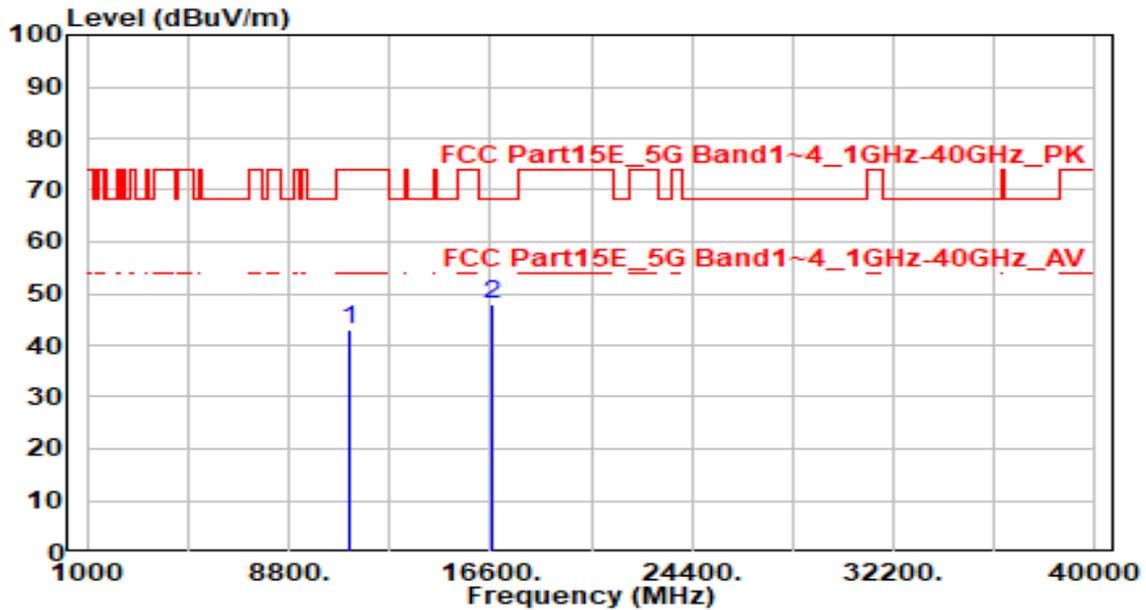


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	38.02	4.97	42.99	-31.01	74.00	300	275	Peak
2	* 16710.000	40.69	7.15	47.83	-20.37	68.20	300	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-02-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

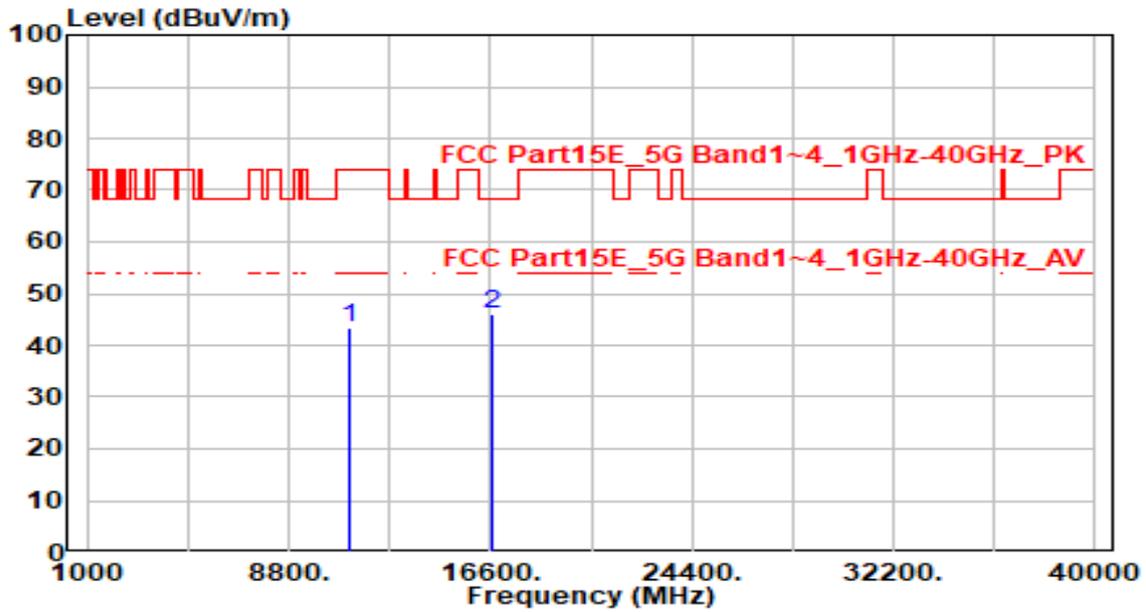


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	38.57	4.97	43.54	-30.46	74.00	300	100	Peak
2	* 16710.000	38.91	7.15	46.06	-22.14	68.20	300	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

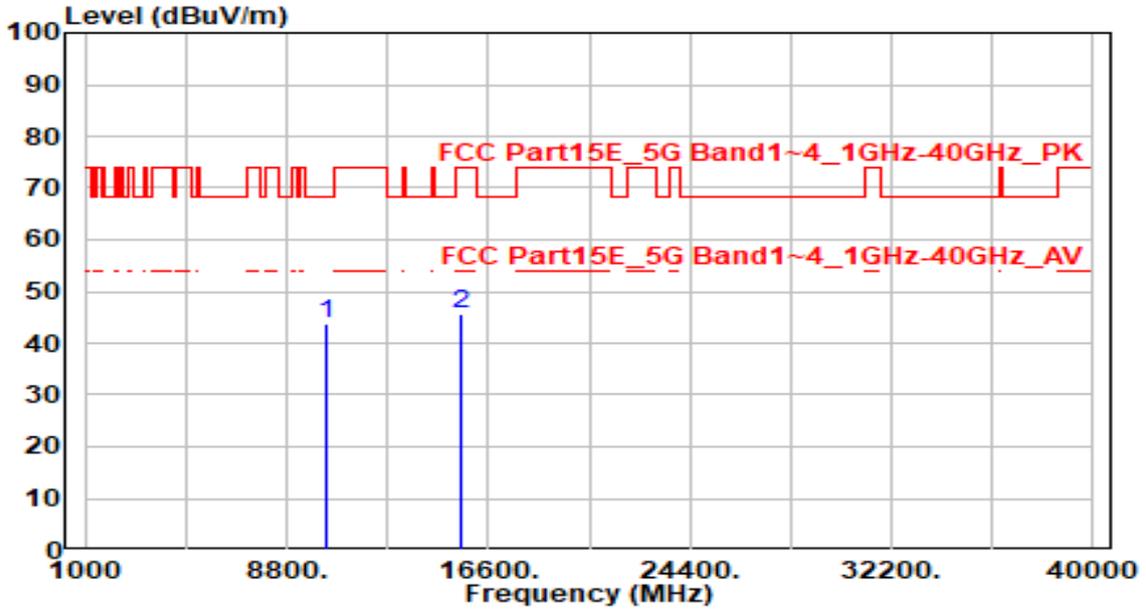


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10360.000	39.20	4.62	43.82	-24.38	68.20	300	20	Peak
2		15540.000	39.57	5.91	45.49	-28.51	74.00	300	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

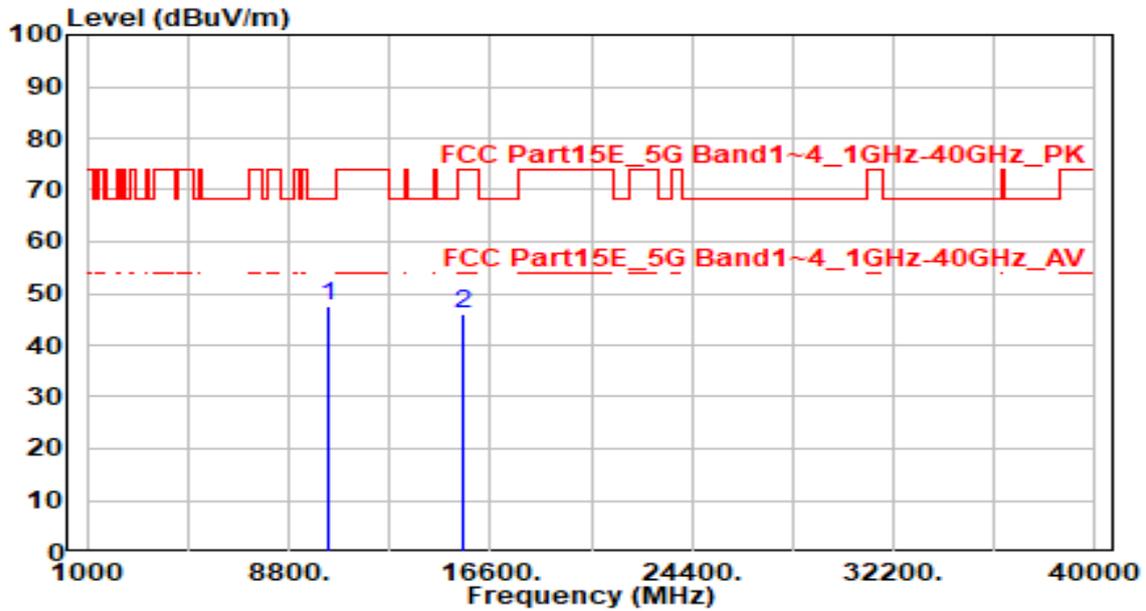


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	43.01	4.62	47.63	-20.57	68.20	300	155	Peak
2		40.26	5.91	46.17	-27.83	74.00	300	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

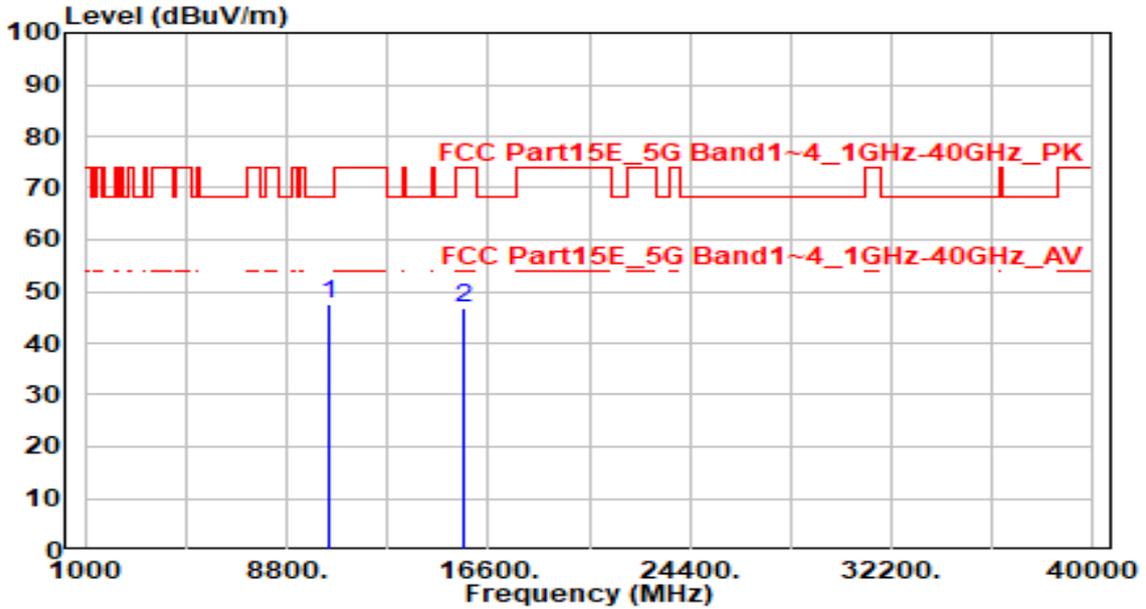


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	43.01	4.62	47.63	-20.57	68.20	300	275	Peak
2	15660.000	40.70	5.98	46.68	-27.32	74.00	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

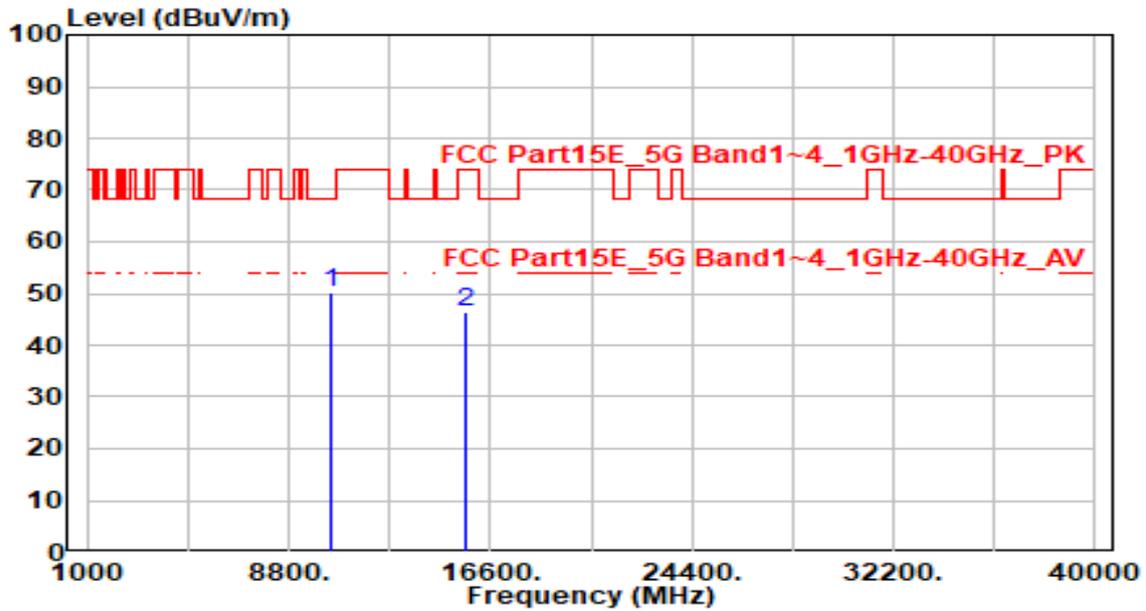


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	45.71	4.62	50.33	-17.87	68.20	200	255	Peak
2	15660.000	40.47	5.98	46.45	-27.55	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

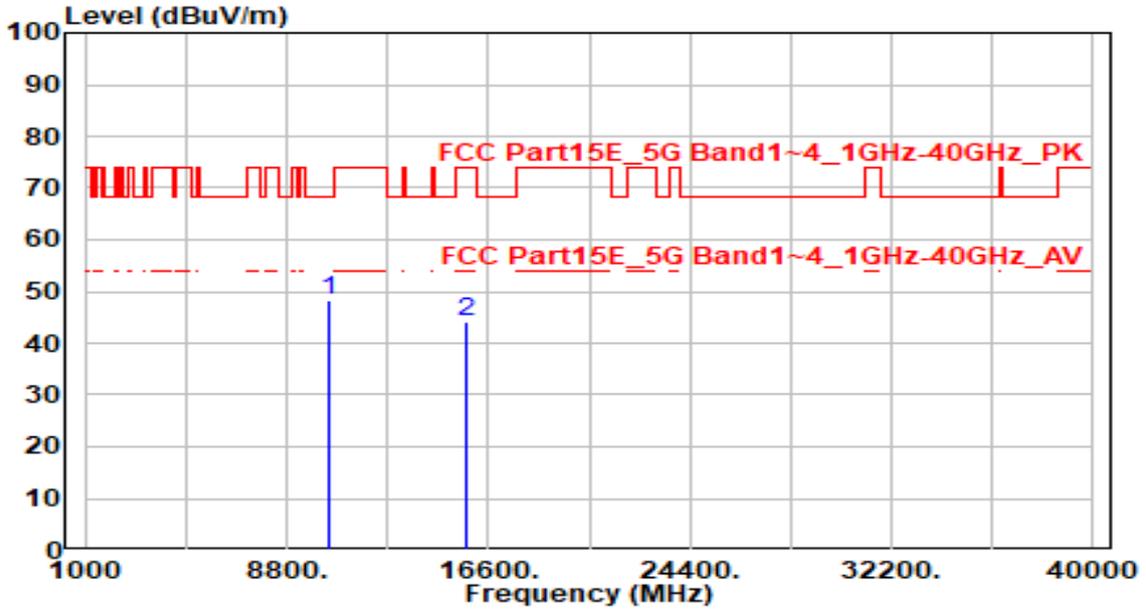


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	43.78	4.63	48.41	-19.79	68.20	300	200	Peak
2	15720.000	38.22	6.03	44.25	-29.75	74.00	300	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

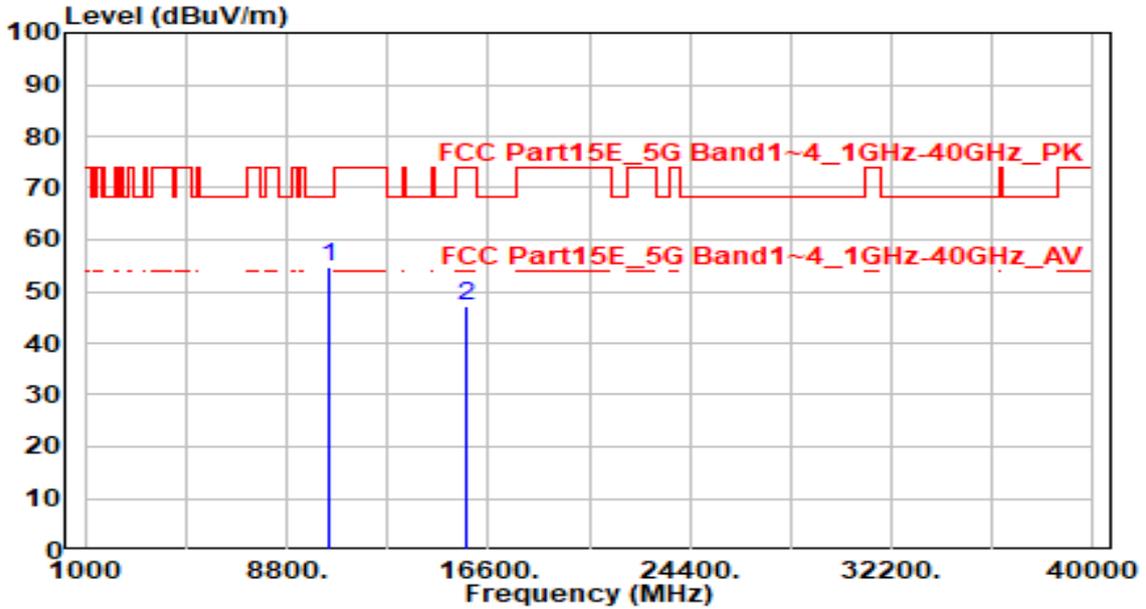


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10480.000	49.95	4.63	54.58	-13.62	68.20	300	155	Peak
2		15720.000	41.04	6.03	47.07	-26.93	74.00	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

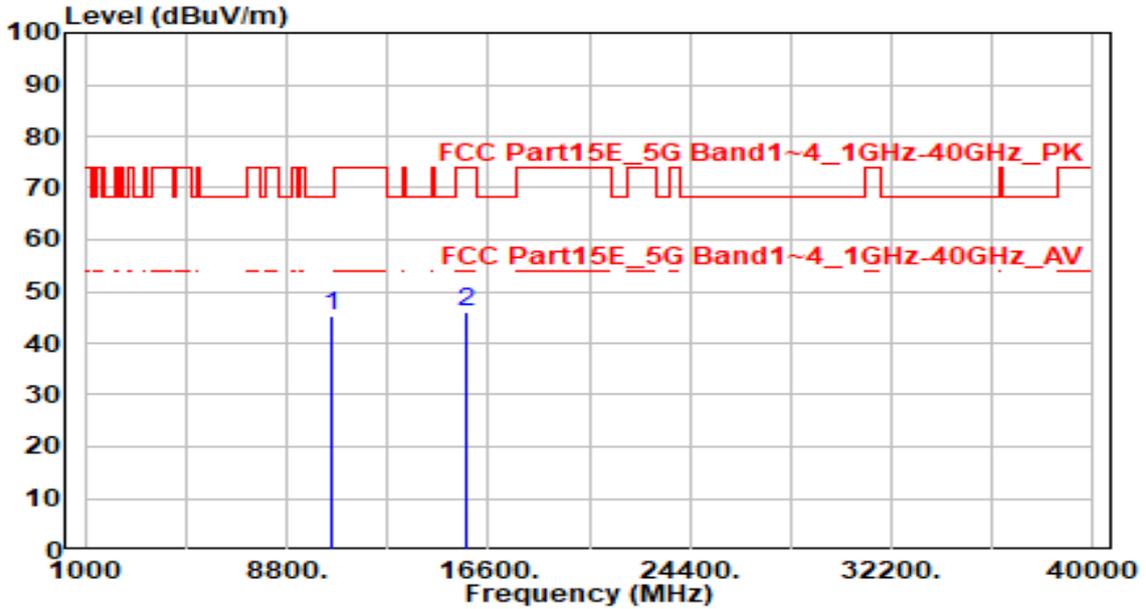


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	40.78	4.64	45.42	-22.78	68.20	200	170	Peak
2	15780.000	39.78	6.08	45.86	-28.14	74.00	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

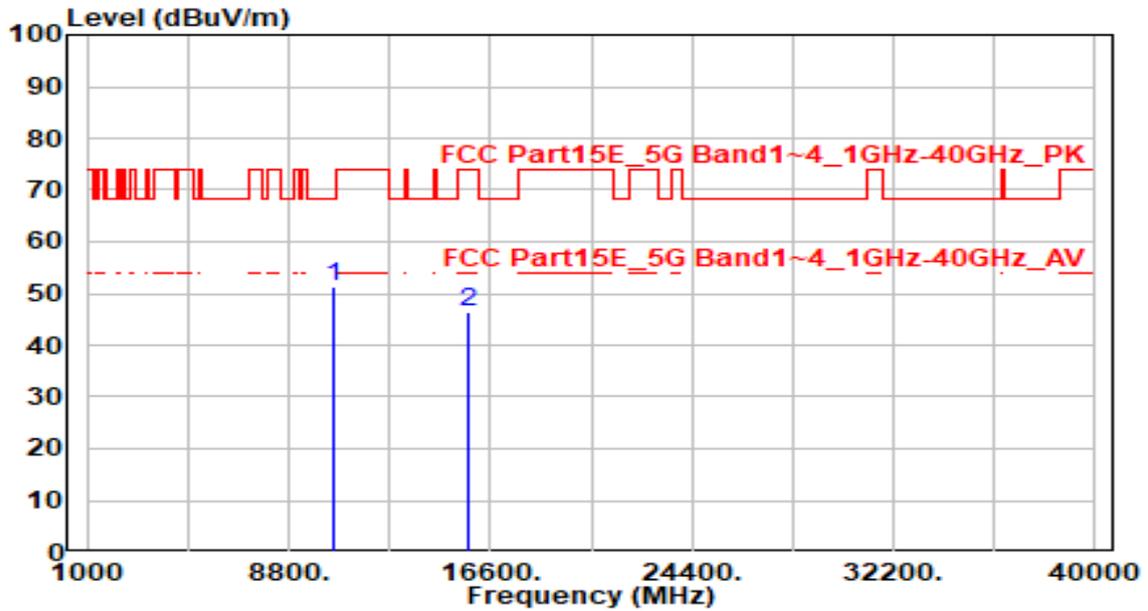


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	46.55	4.64	51.19	-17.01	68.20	200	170	Peak
2		40.36	6.08	46.44	-27.56	74.00	320	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

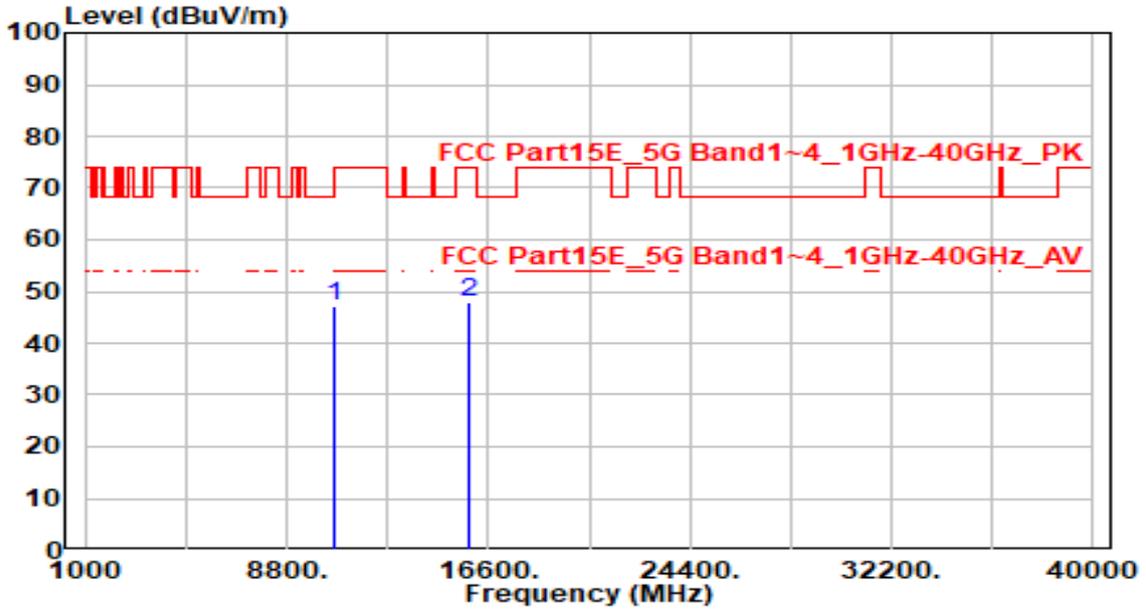


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	42.41	4.66	47.07	-21.13	68.20	300	10	Peak
2	15900.000	41.66	6.24	47.90	-26.10	74.00	300	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

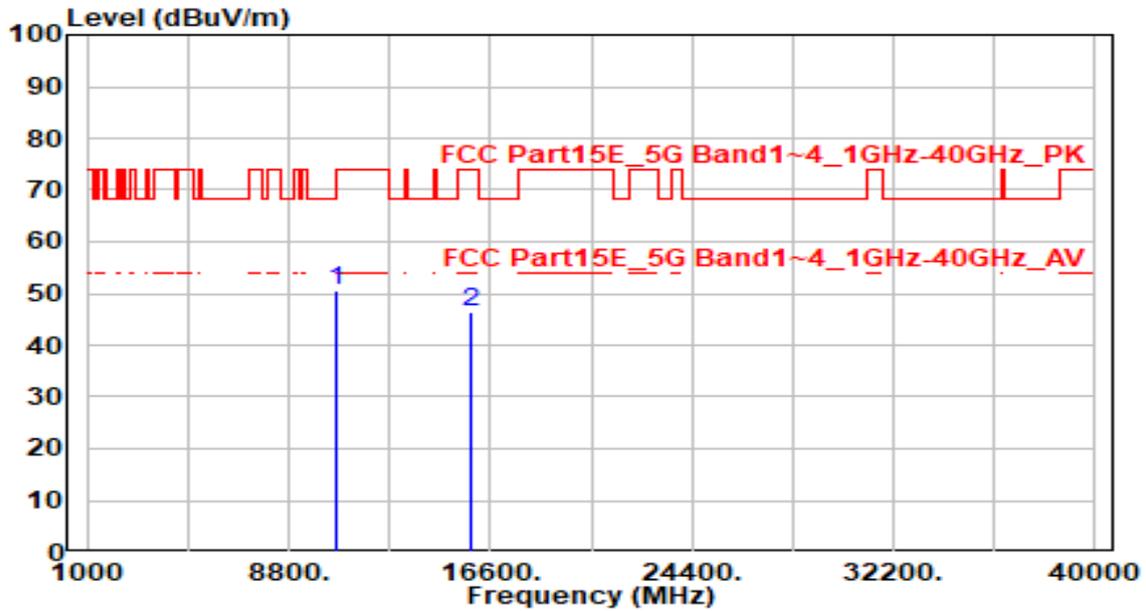


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	45.86	4.66	50.52	-17.68	68.20	200	50	Peak
2		40.28	6.24	46.51	-27.49	74.00	240	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

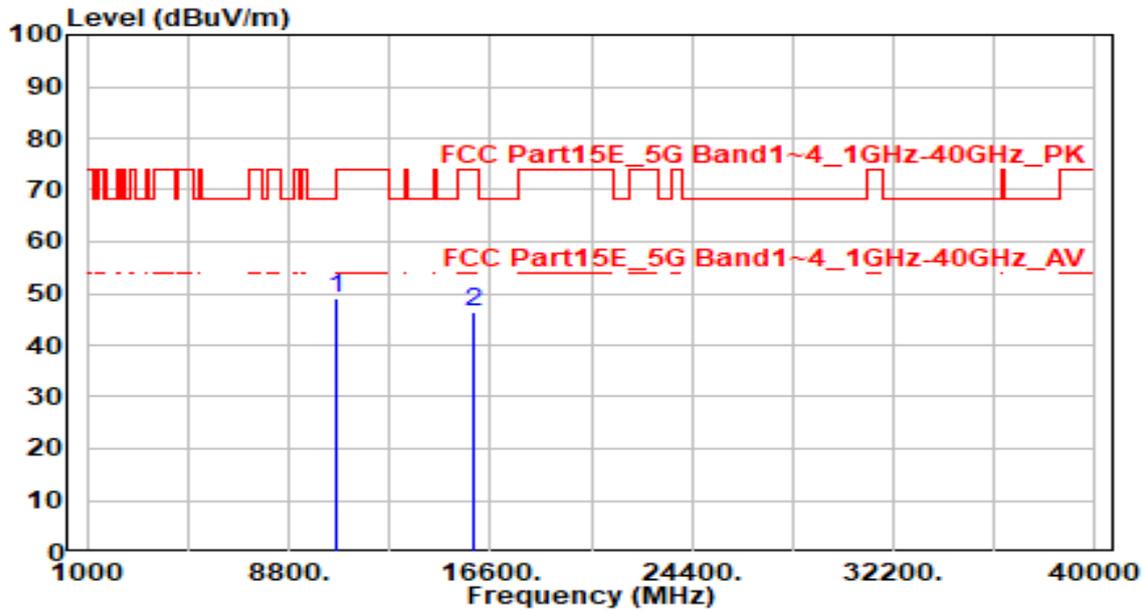


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10640.000	44.55	4.65	49.20	-24.80	74.00	200	210	Peak
2		15960.000	40.26	6.32	46.58	-27.42	74.00	300	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

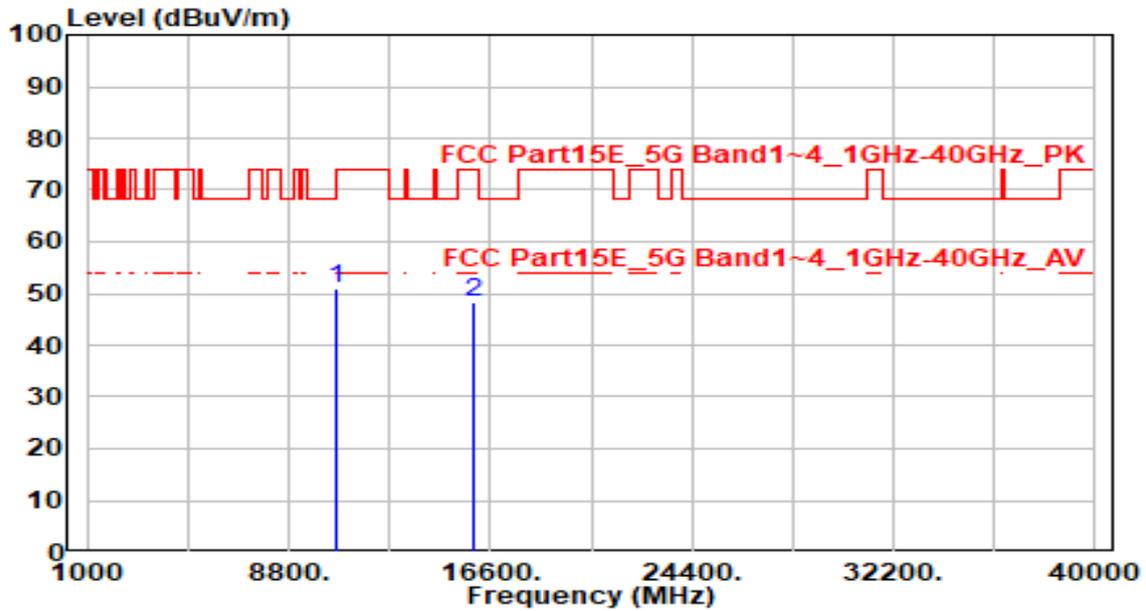


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	46.30	4.65	50.95	-23.05	74.00	200	160	Peak
2		42.00	6.32	48.32	-25.68	74.00	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

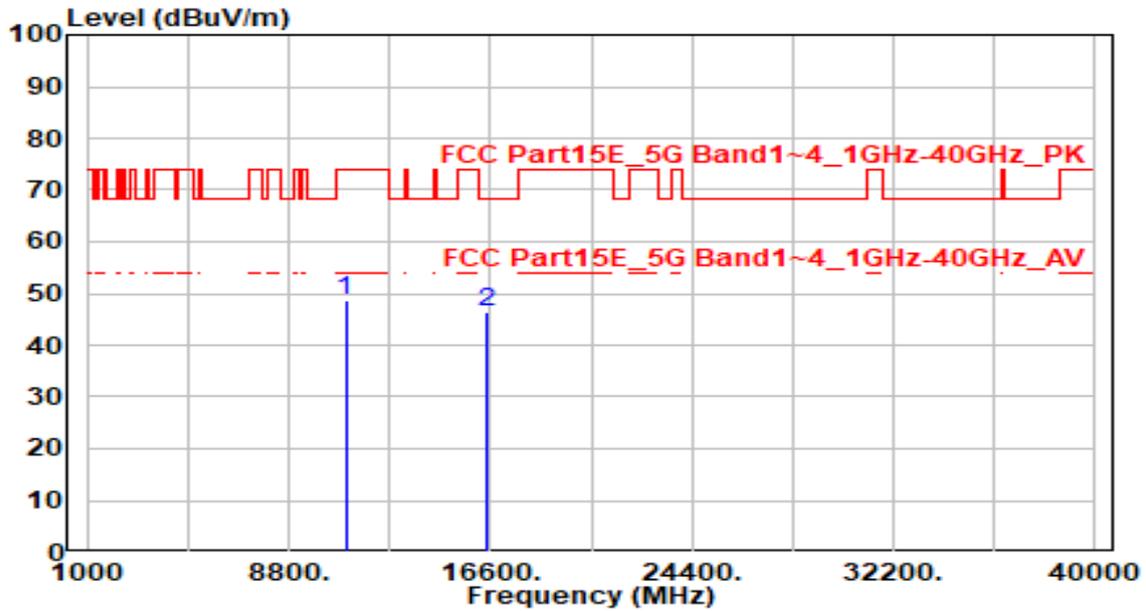


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.81	4.74	48.55	-25.45	74.00	300	0	Peak
2	* 16500.000	39.53	6.86	46.39	-21.81	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

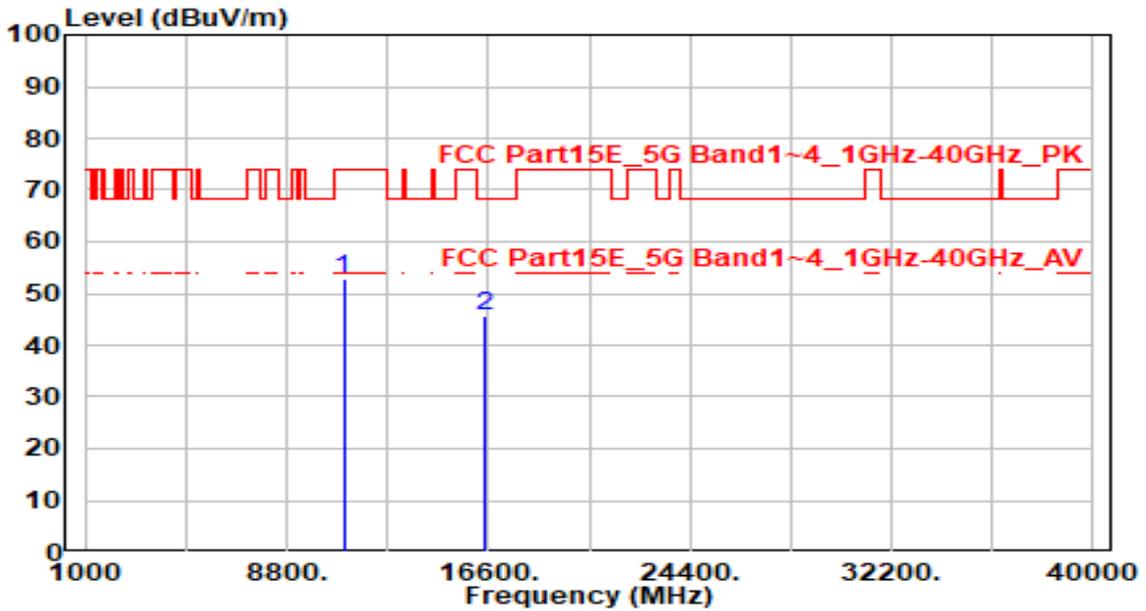


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11000.000	47.93	4.74	52.67	-21.33	74.00	200	155	Peak
2	16500.000	38.73	6.86	45.59	-22.61	68.20	300	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

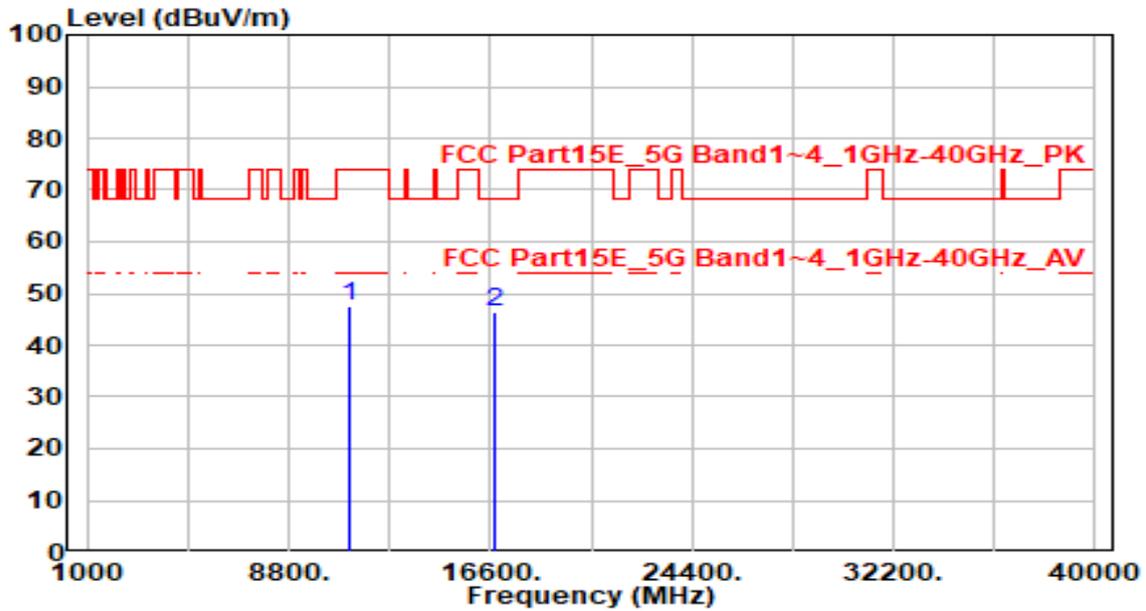


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.68	5.00	47.68	-26.32	74.00	300	0	Peak
2	* 16740.000	39.26	7.19	46.45	-21.75	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

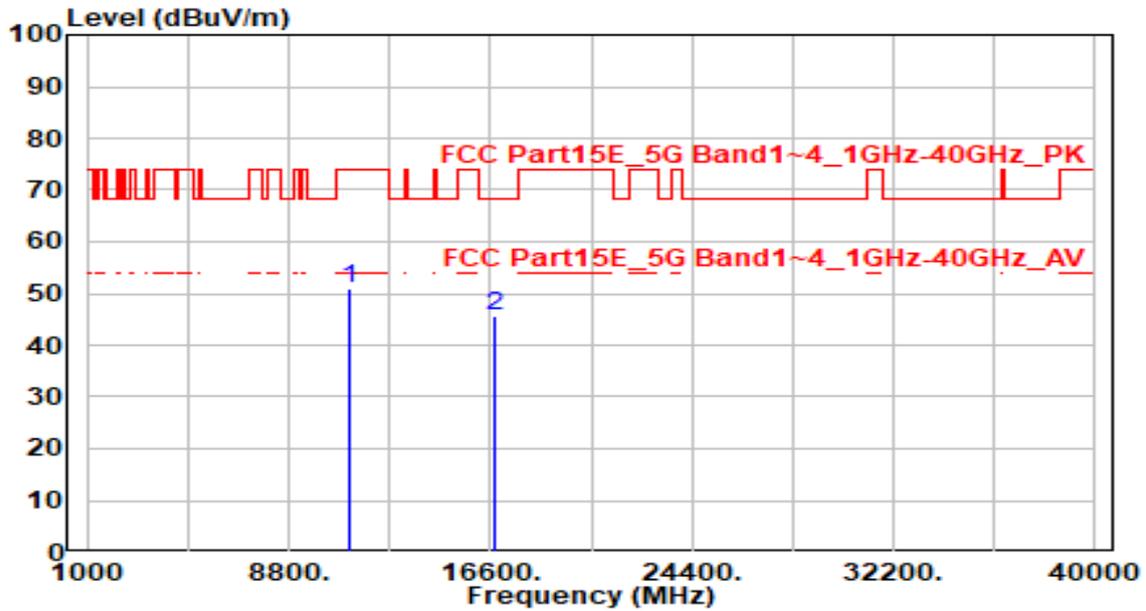


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	46.01	5.00	51.00	-23.00	74.00	200	45	Peak
2	* 16740.000	38.43	7.19	45.62	-22.58	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

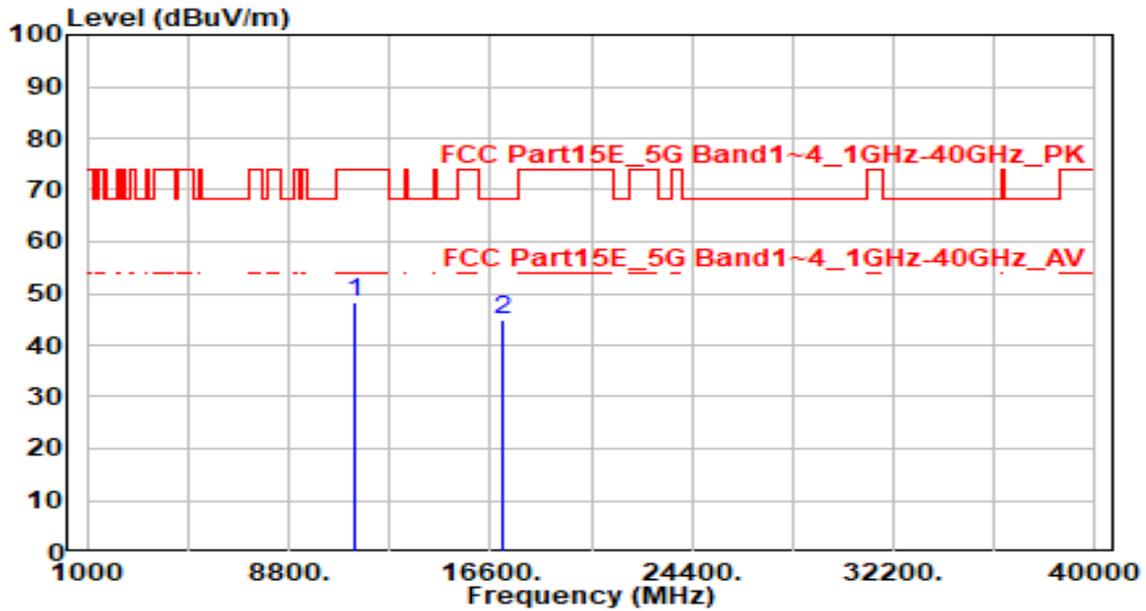


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.21	5.18	48.39	-25.61	74.00	300	190	Peak
2	* 17100.000	39.31	5.41	44.72	-23.48	68.20	255	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

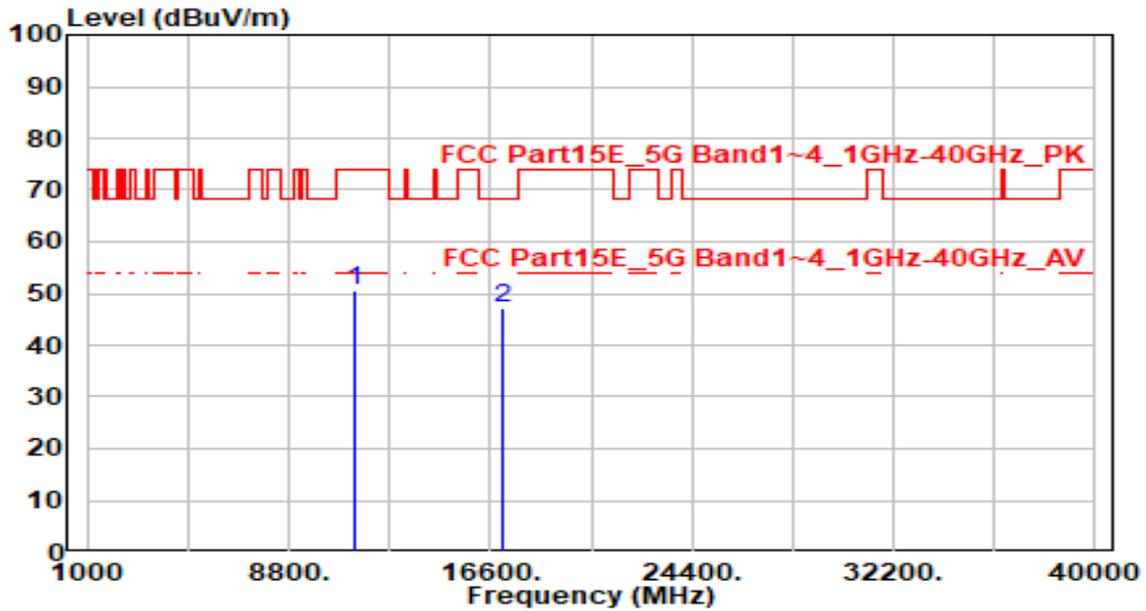


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	45.24	5.18	50.42	-23.58	74.00	250	360	Peak
2	* 17100.000	41.60	5.41	47.01	-21.19	68.20	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

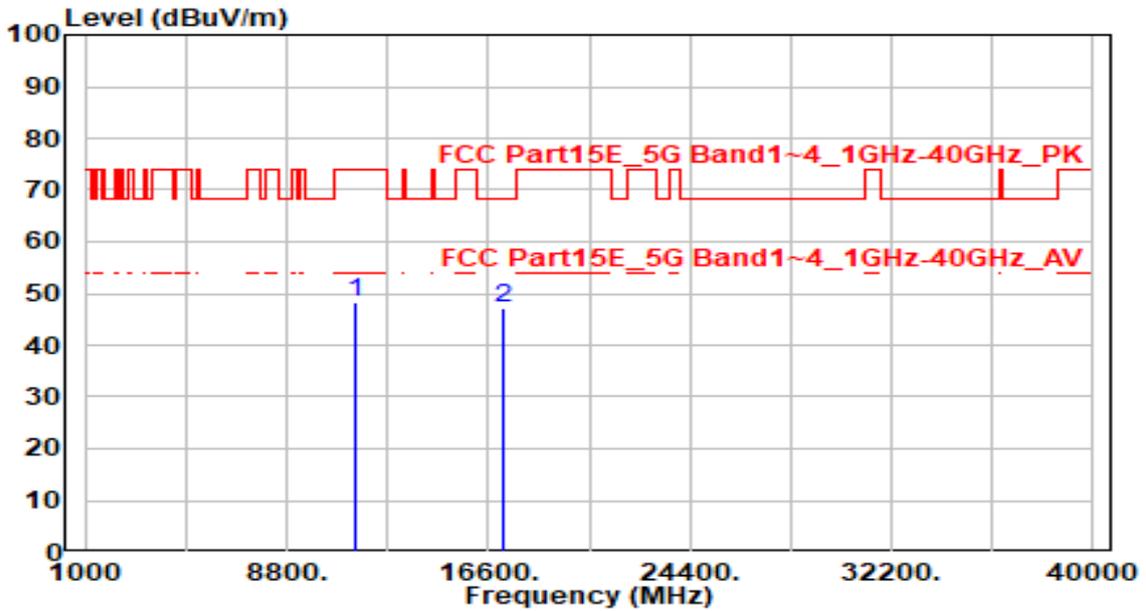


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.25	5.17	48.42	-25.58	74.00	300	275	Peak
2	* 17160.000	41.73	5.28	47.02	-21.18	68.20	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

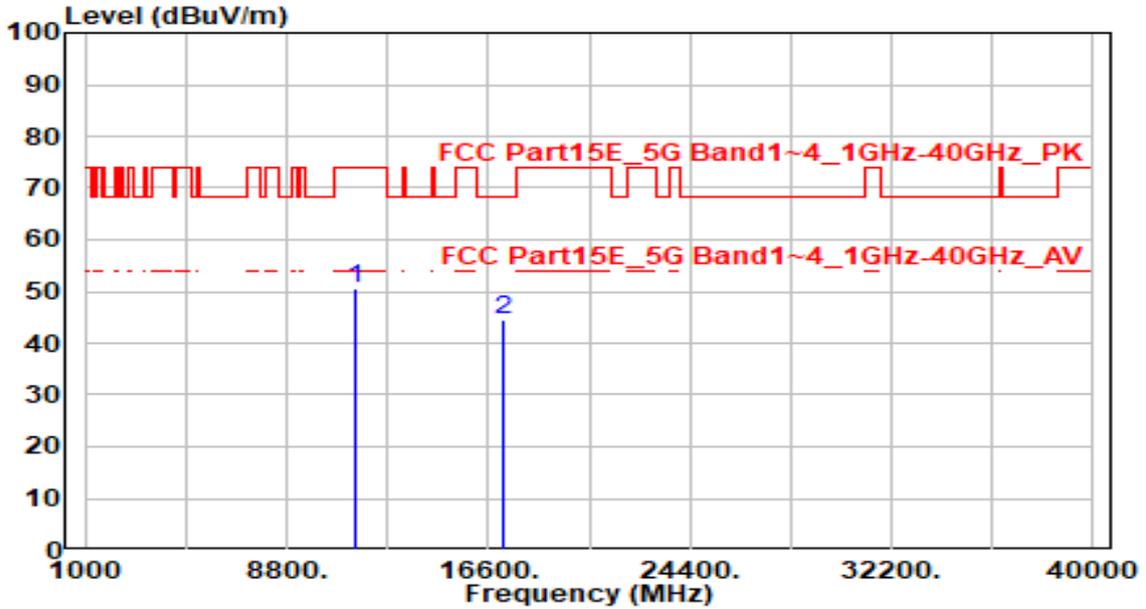


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11440.000	45.58	5.17	50.75	-23.25	74.00	300	355	Peak
2	17160.000	39.21	5.28	44.50	-23.70	68.20	300	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 36_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

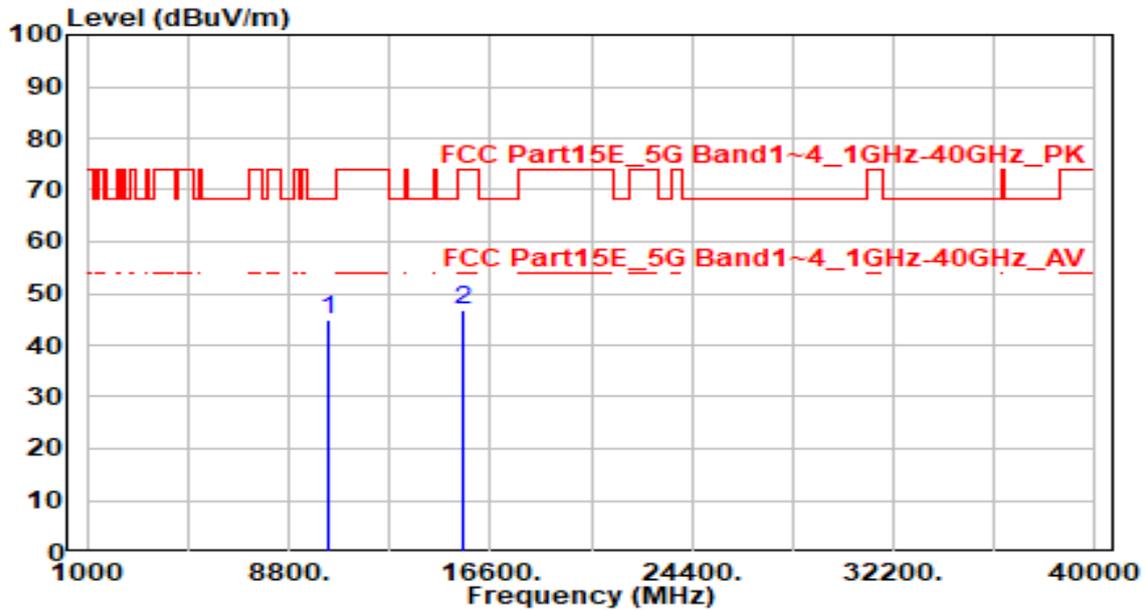


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10360.000	40.36	4.62	44.98	-23.22	68.20	200	165	Peak
2		15540.000	40.89	5.91	46.80	-27.20	74.00	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 36_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

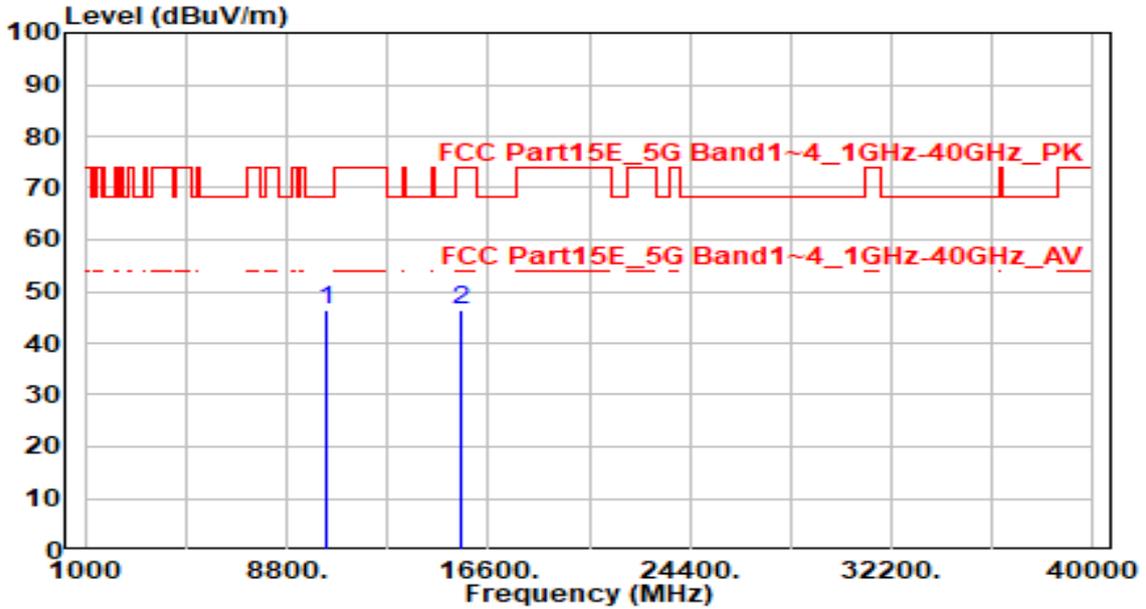


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	41.83	4.62	46.45	-21.75	68.20	200	345	Peak
2	15540.000	40.37	5.91	46.29	-27.71	74.00	300	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

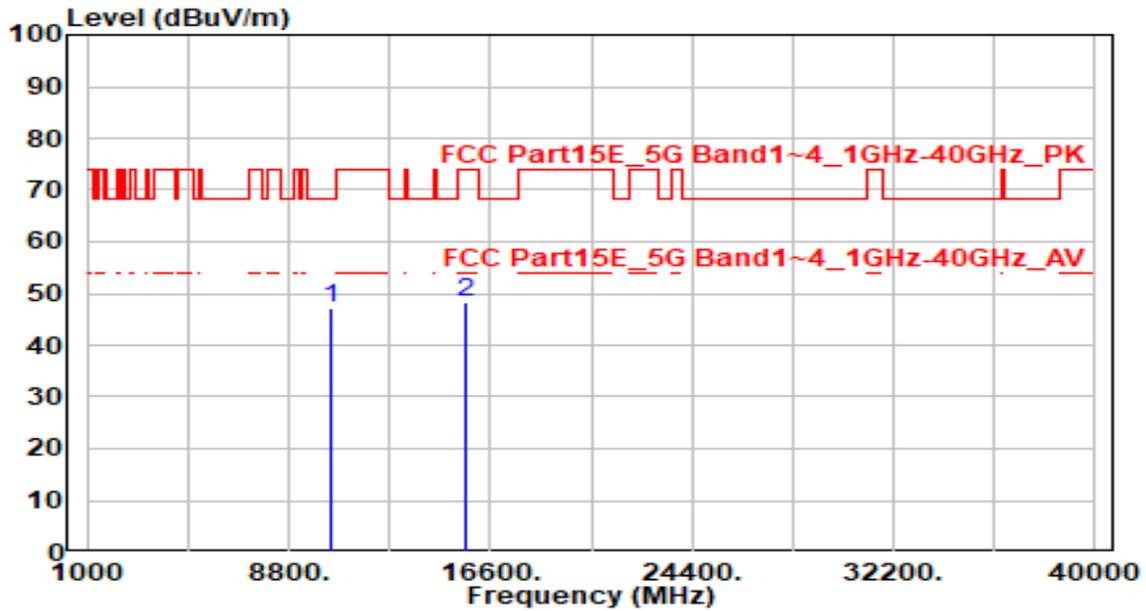


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	42.56	4.62	47.18	-21.02	68.20	200	180	Peak
2	15660.000	42.35	5.98	48.33	-25.67	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 44_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

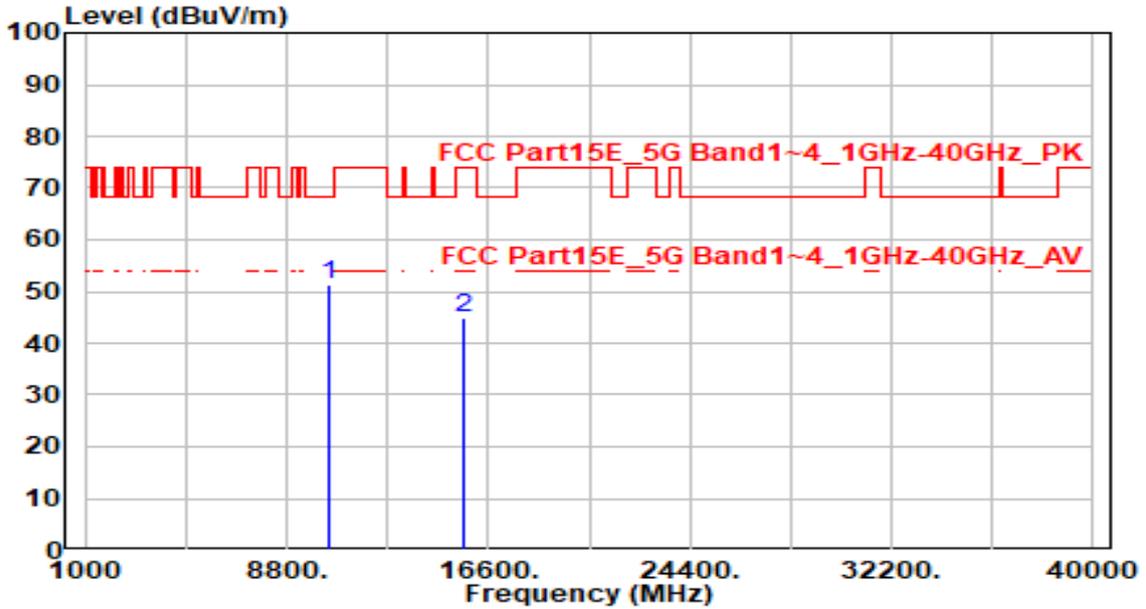


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	46.73	4.62	51.35	-16.85	68.20	200	65	Peak
2	15660.000	38.89	5.98	44.86	-29.14	74.00	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 48_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

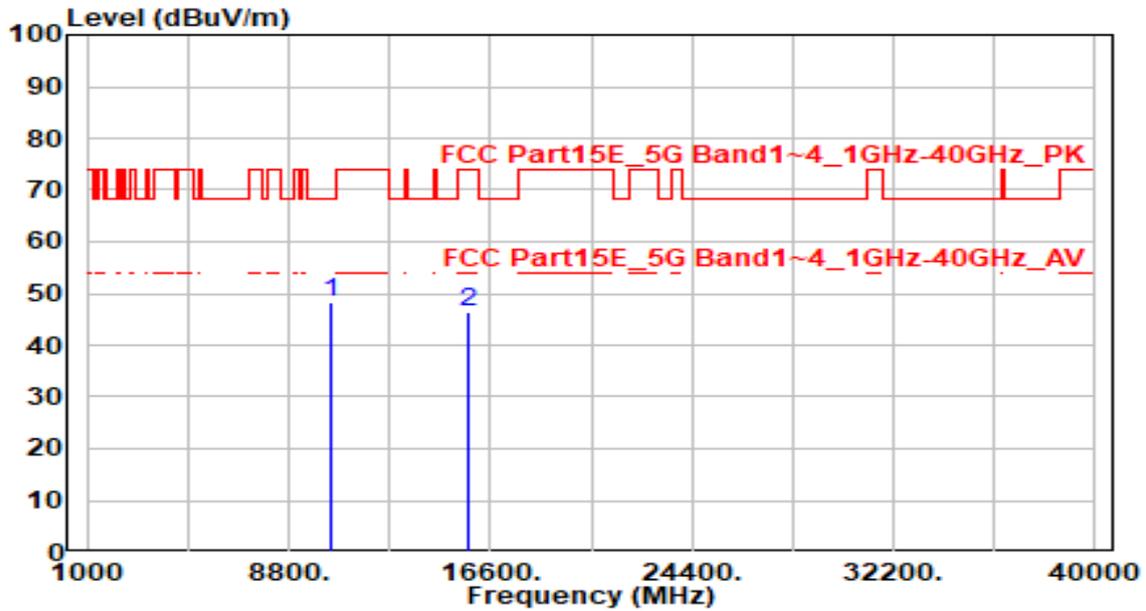


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	43.66	4.63	48.29	-19.91	68.20	300	175	Peak
2		40.36	6.03	46.38	-27.62	74.00	300	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band1_CH 48_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

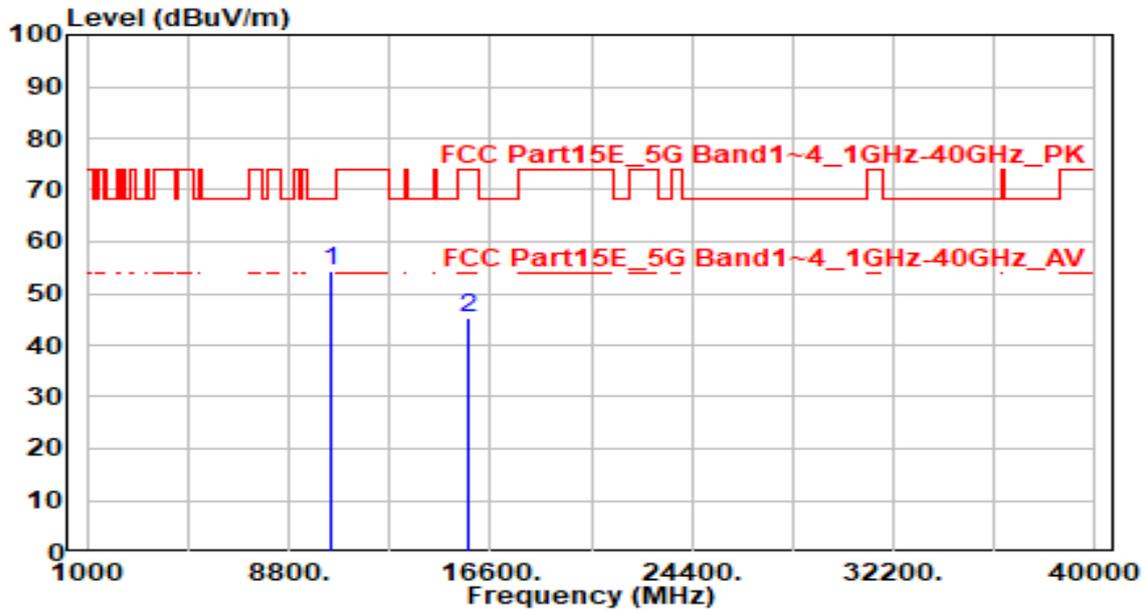


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10480.000	49.71	4.63	54.34	-13.86	68.20	200	155	Peak
2		15720.000	39.16	6.03	45.19	-28.81	74.00	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 52_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

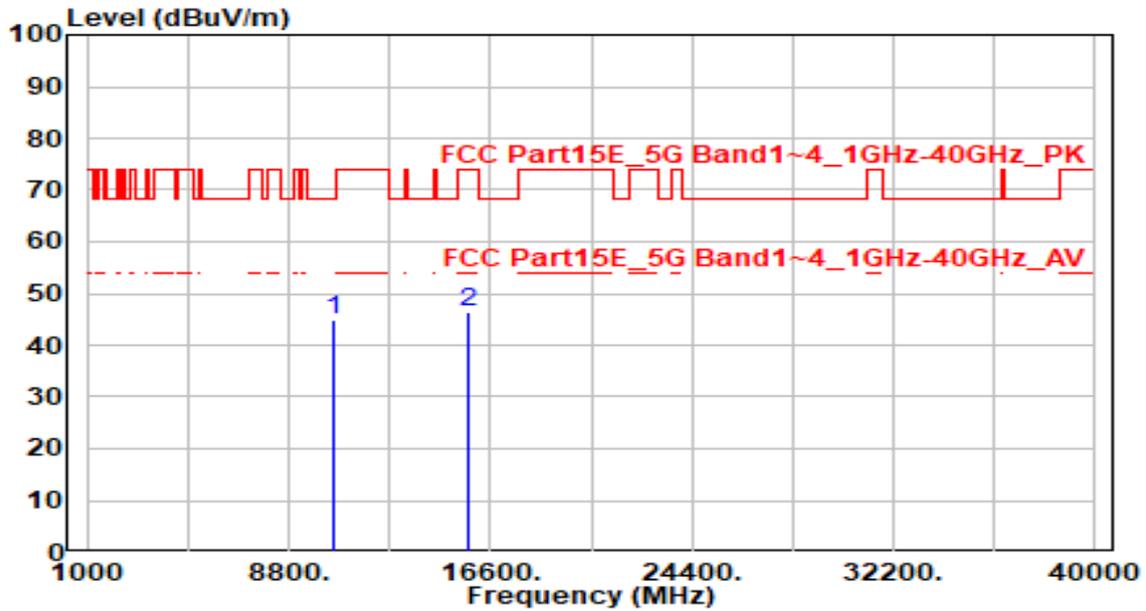


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10520.000	40.15	4.64	44.79	-23.41	68.20	280	10	Peak
2		15780.000	40.30	6.08	46.38	-27.62	74.00	205	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 52_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

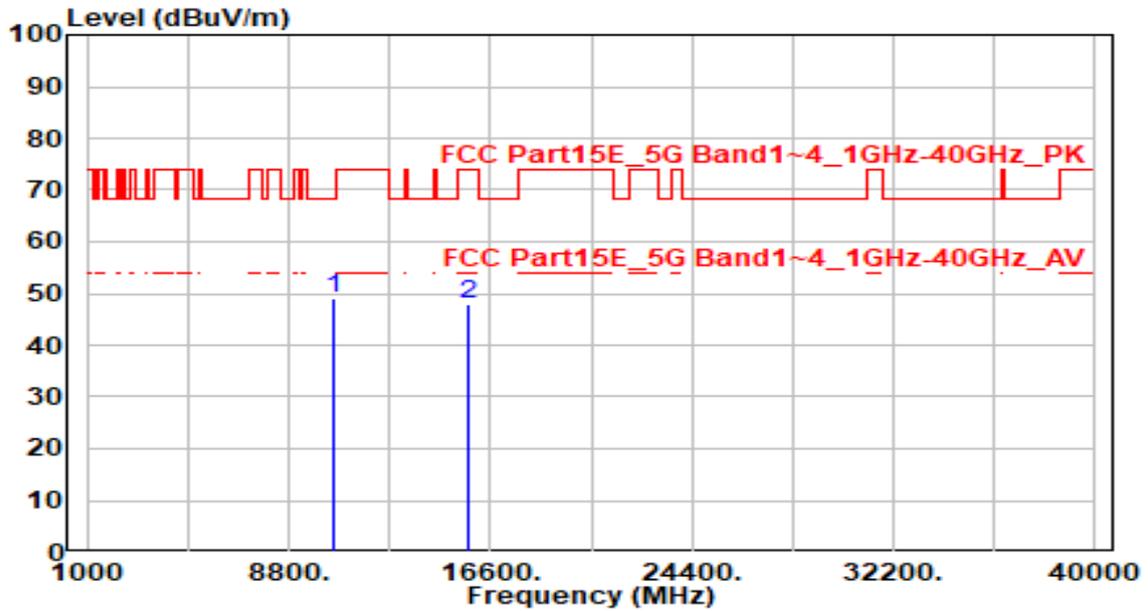


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	44.43	4.64	49.07	-19.13	68.20	200	210	Peak
2	15780.000	41.83	6.08	47.91	-26.09	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 60_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

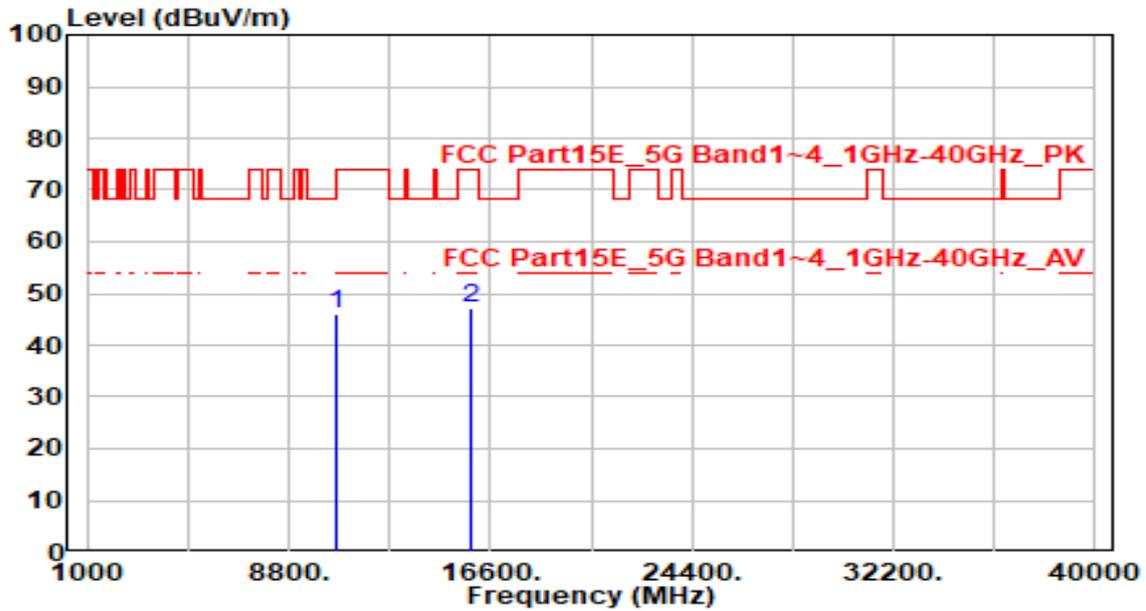


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.35	4.66	46.01	-22.19	68.20	200	175	Peak
2		41.07	6.24	47.31	-26.69	74.00	205	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 60_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

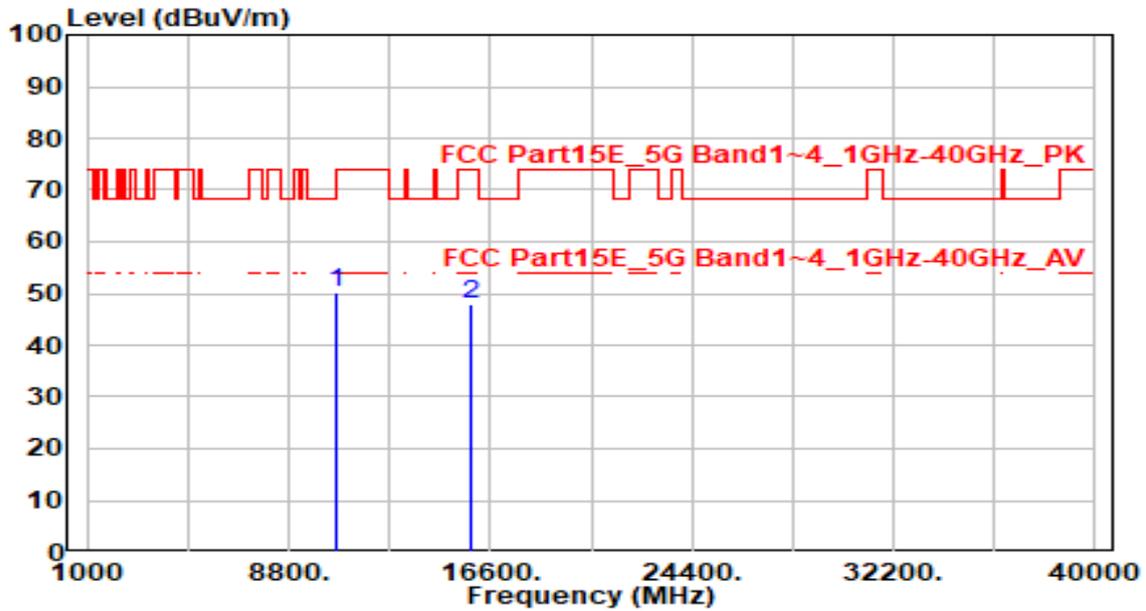


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10600.000	45.36	4.66	50.02	-18.18	68.20	205	175	Peak
2		15900.000	41.69	6.24	47.93	-26.07	74.00	200	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 64_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

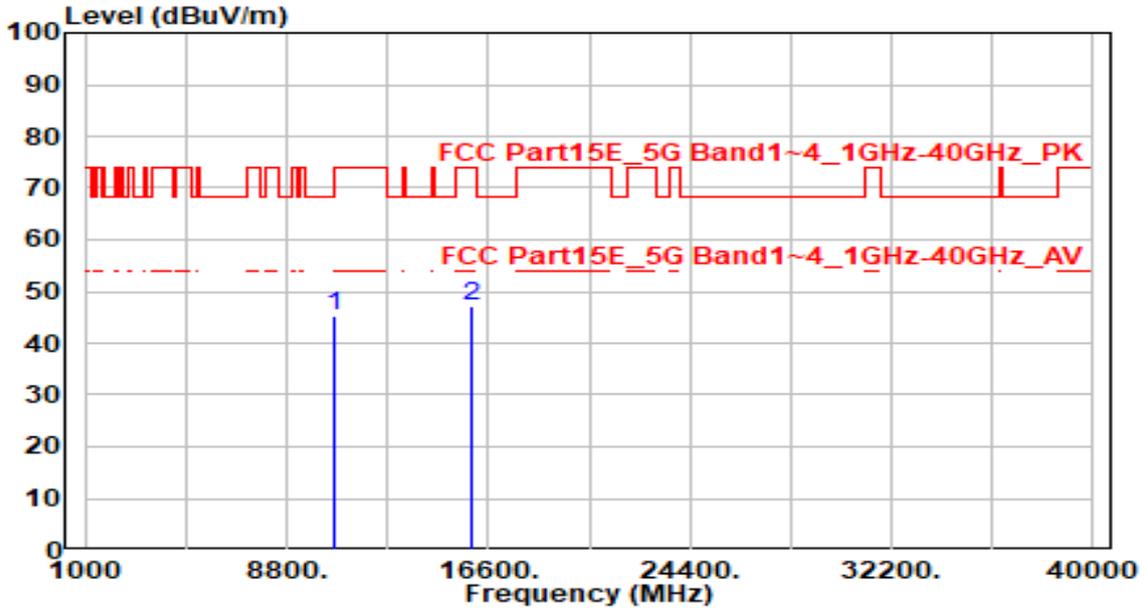


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.77	4.65	45.43	-28.57	74.00	300	95	Peak
2	* 15960.000	40.93	6.32	47.26	-26.74	74.00	300	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band2_CH 64_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

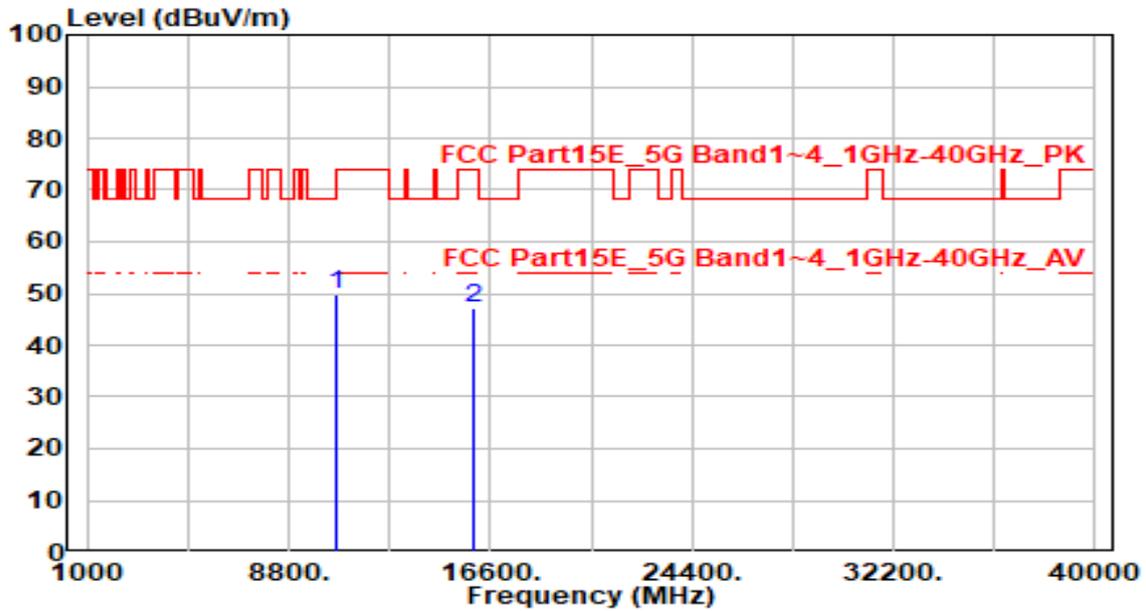


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10640.000	45.26	4.65	49.91	-24.09	74.00	200	145	Peak
2	15960.000	40.82	6.32	47.14	-26.86	74.00	255	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 100_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

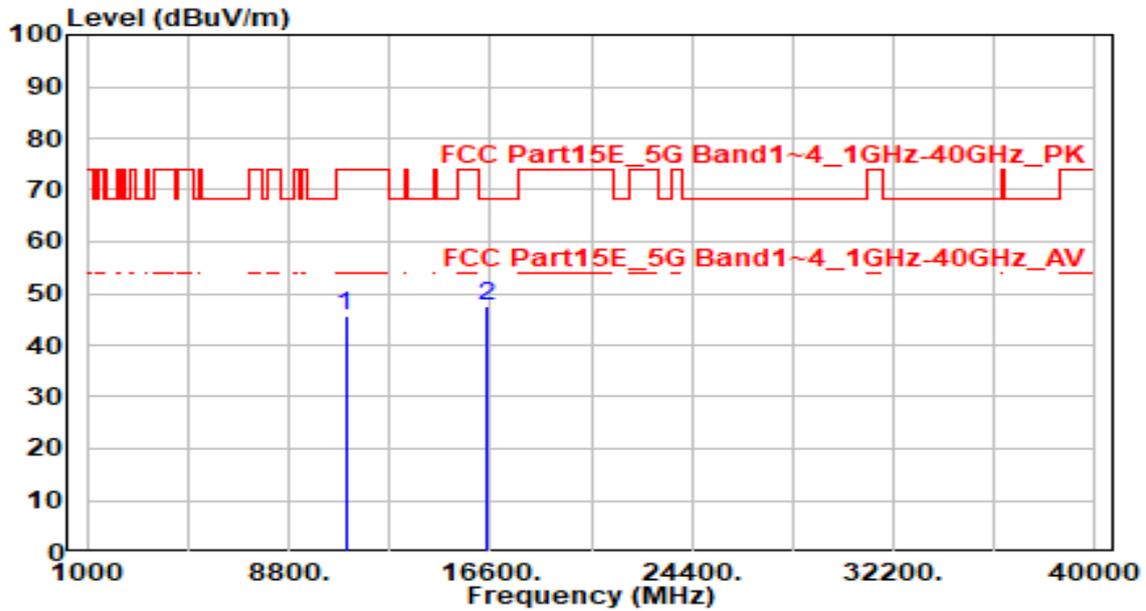


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.10	4.74	45.84	-28.16	74.00	300	255	Peak
2	* 16500.000	40.60	6.86	47.46	-20.74	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 100_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

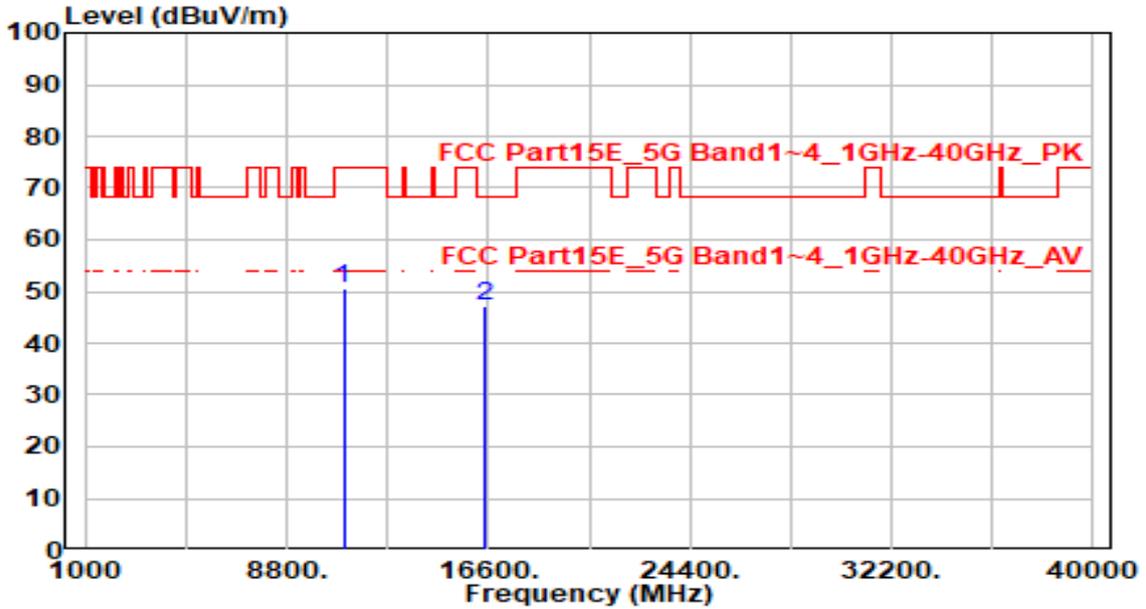


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	45.87	4.74	50.61	-23.39	74.00	300	10	Peak
2	* 16500.000	40.30	6.86	47.16	-21.04	68.20	200	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 116_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

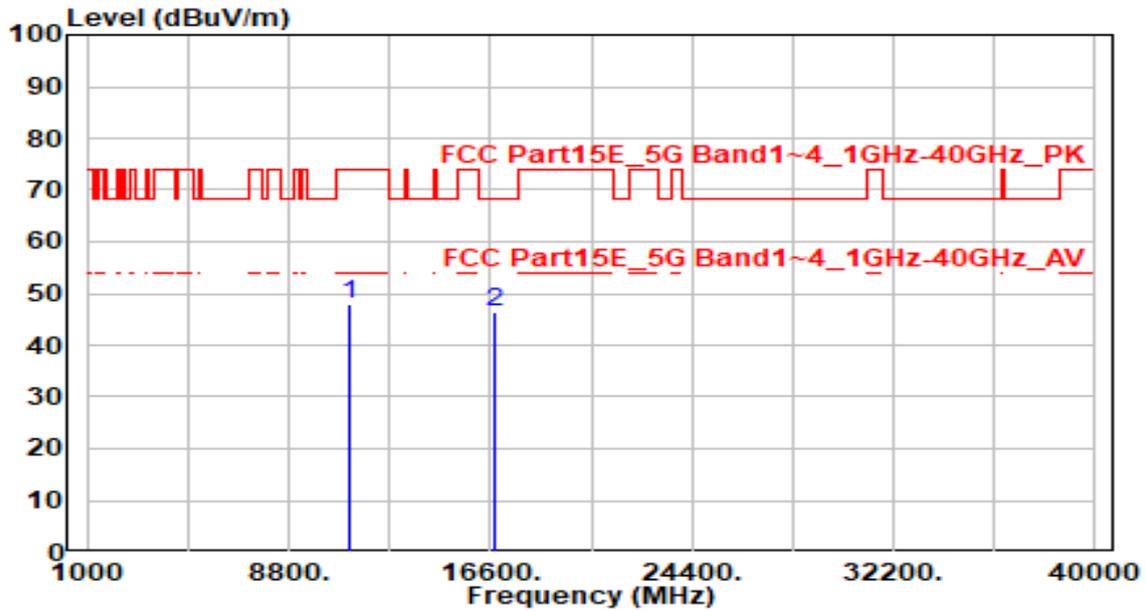


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.96	5.00	47.96	-26.04	74.00	200	220	Peak
2	* 16740.000	39.14	7.19	46.33	-21.87	68.20	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 116_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

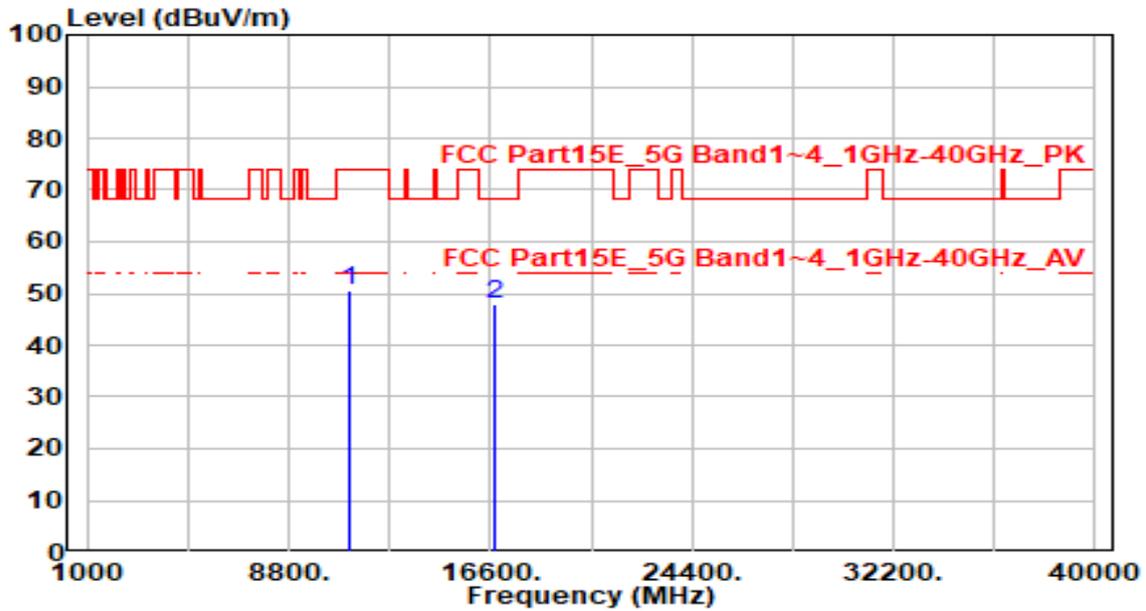


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	45.69	5.00	50.69	-23.31	74.00	300	160	Peak
2	* 16740.000	40.64	7.19	47.82	-20.38	68.20	305	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 140_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

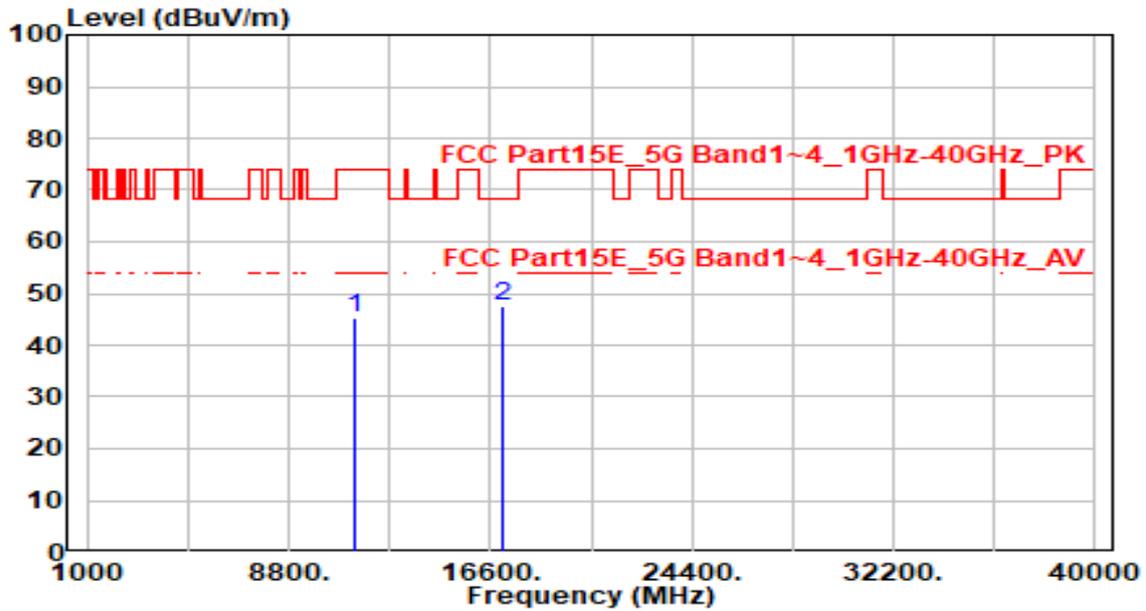


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	40.02	5.18	45.20	-28.80	74.00	300	0	Peak
2	* 17100.000	42.03	5.41	47.44	-20.76	68.20	300	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 140_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

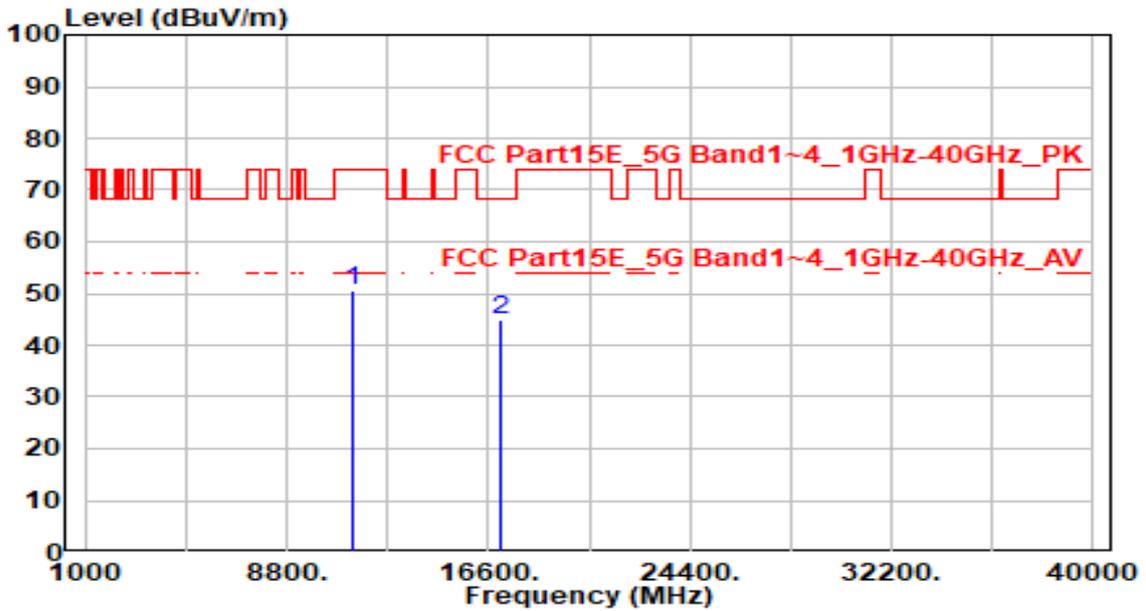


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	45.54	5.18	50.73	-23.27	74.00	200	170	Peak
2	* 17100.000	39.55	5.41	44.96	-23.24	68.20	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 144_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

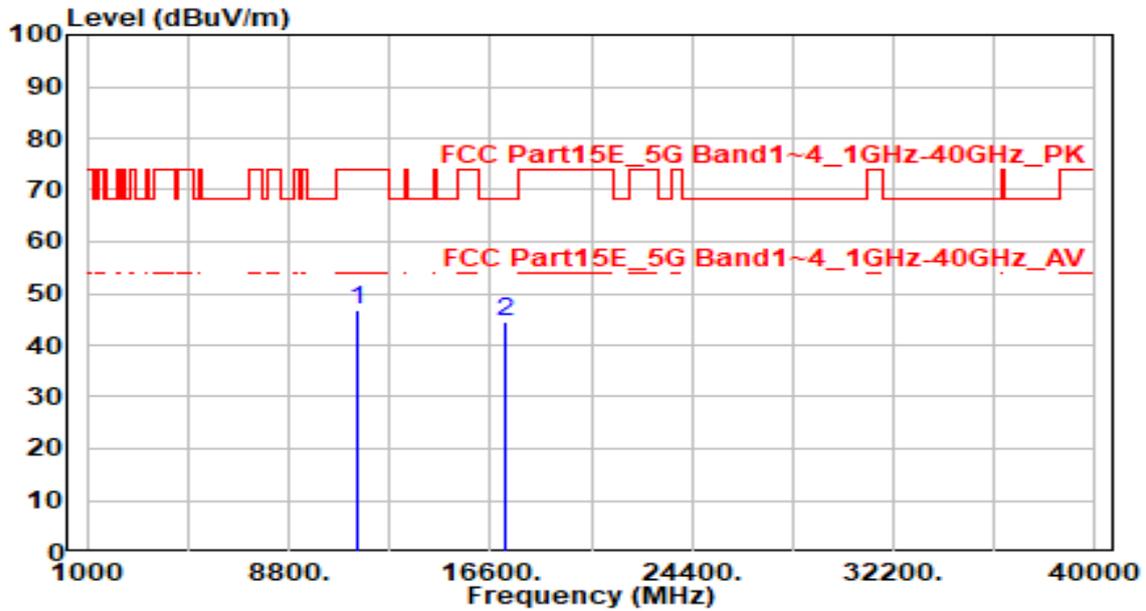


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.60	5.17	46.77	-27.23	74.00	300	265	Peak
2	* 17160.000	39.30	5.28	44.58	-23.62	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac20_TX_Band3_CH 144_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

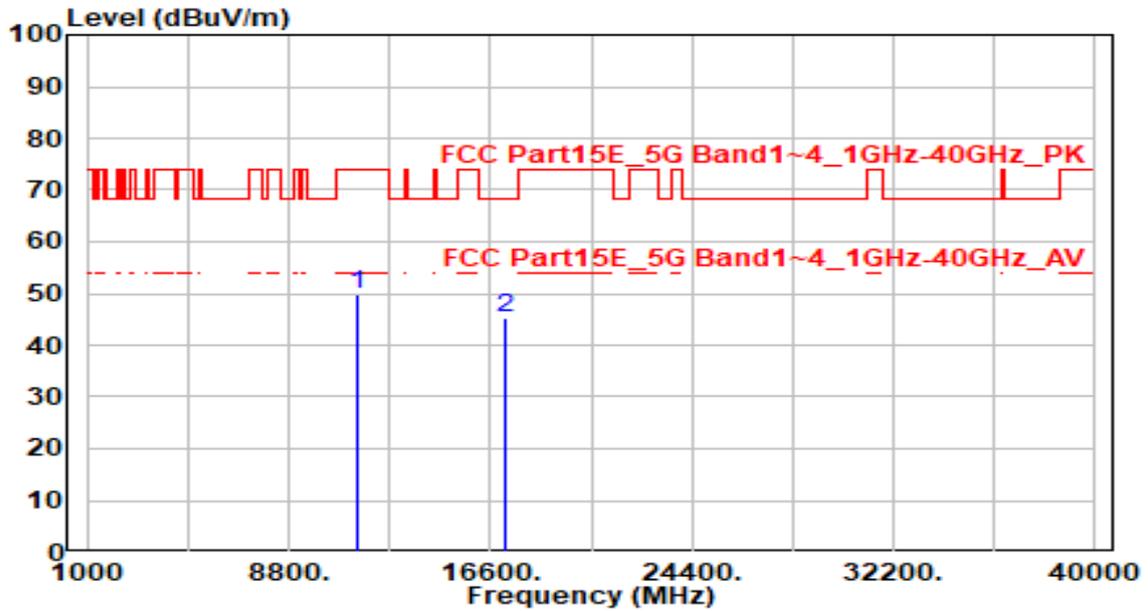


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	44.65	5.17	49.82	-24.18	74.00	200	200	Peak
2	* 17160.000	40.00	5.28	45.28	-22.92	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band1_CH 38_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

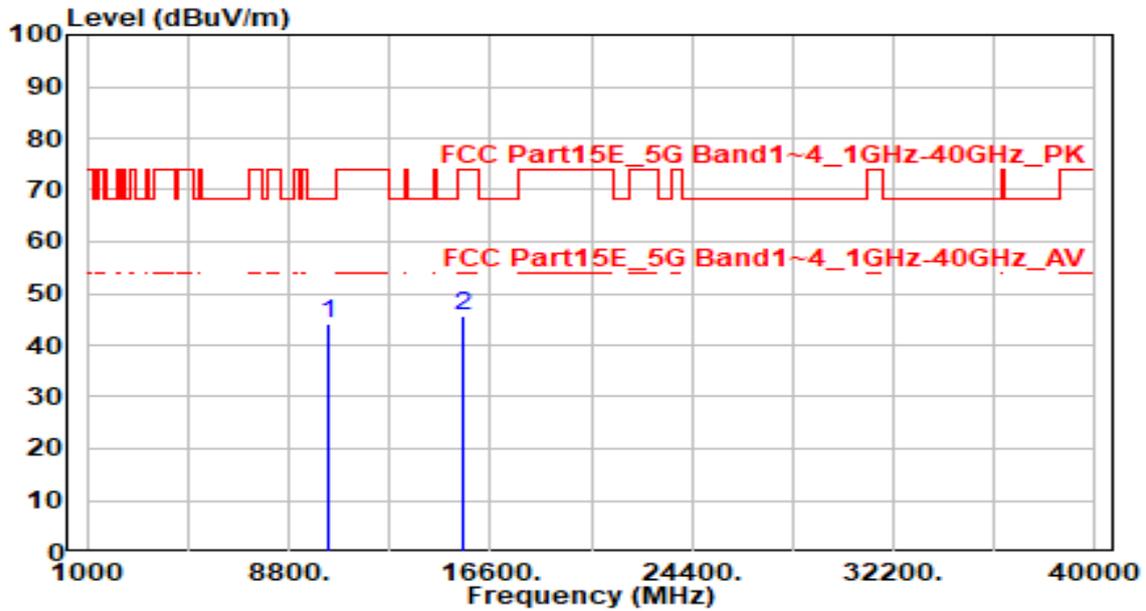


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10380.000	39.68	4.61	44.30	-23.90	68.20	300	255	Peak
2		15570.000	39.72	5.92	45.64	-28.36	74.00	300	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band1_CH 38_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

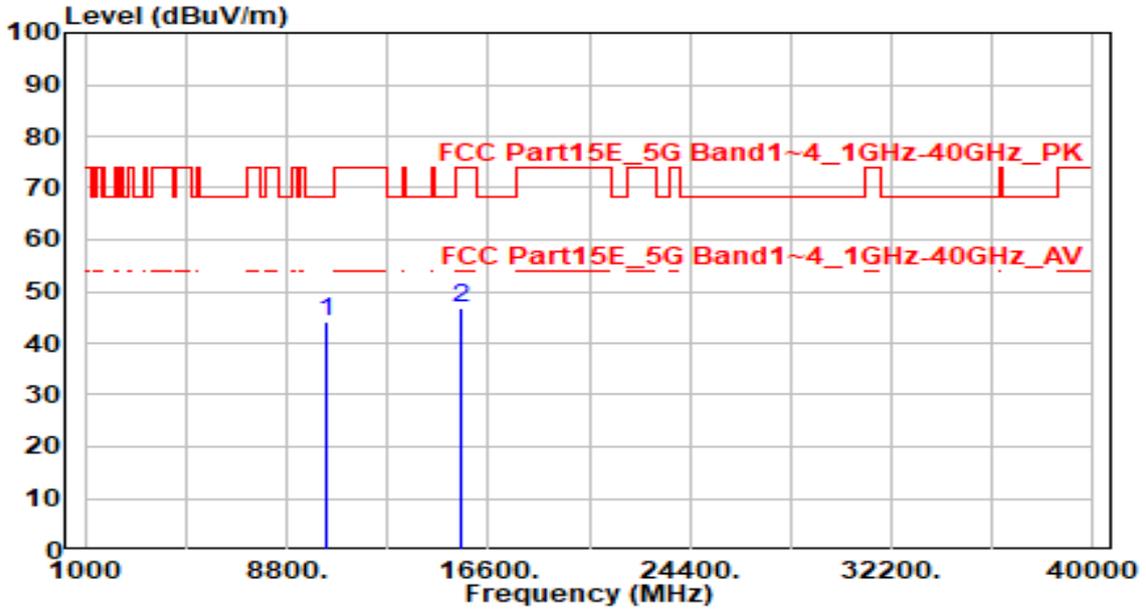


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	39.47	4.61	44.09	-24.11	68.20	215	90	Peak
2	15570.000	40.83	5.92	46.75	-27.25	74.00	180	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band1_CH 46_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

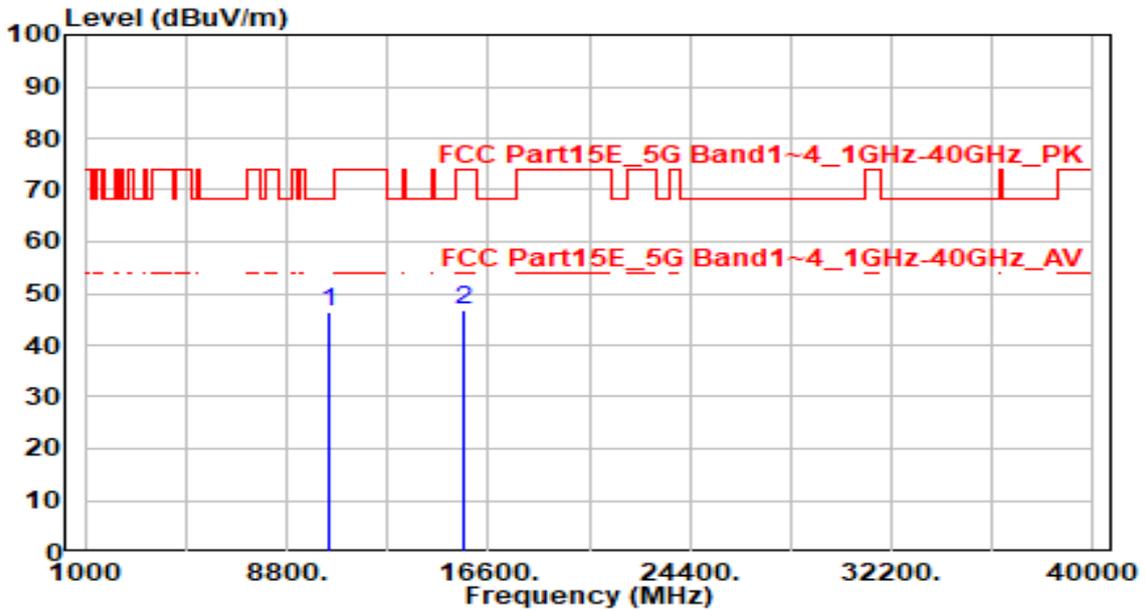


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10460.000	41.89	4.63	46.51	-21.69	68.20	300	35	Peak
2		15690.000	40.75	6.00	46.75	-27.25	74.00	300	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band1_CH 46_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

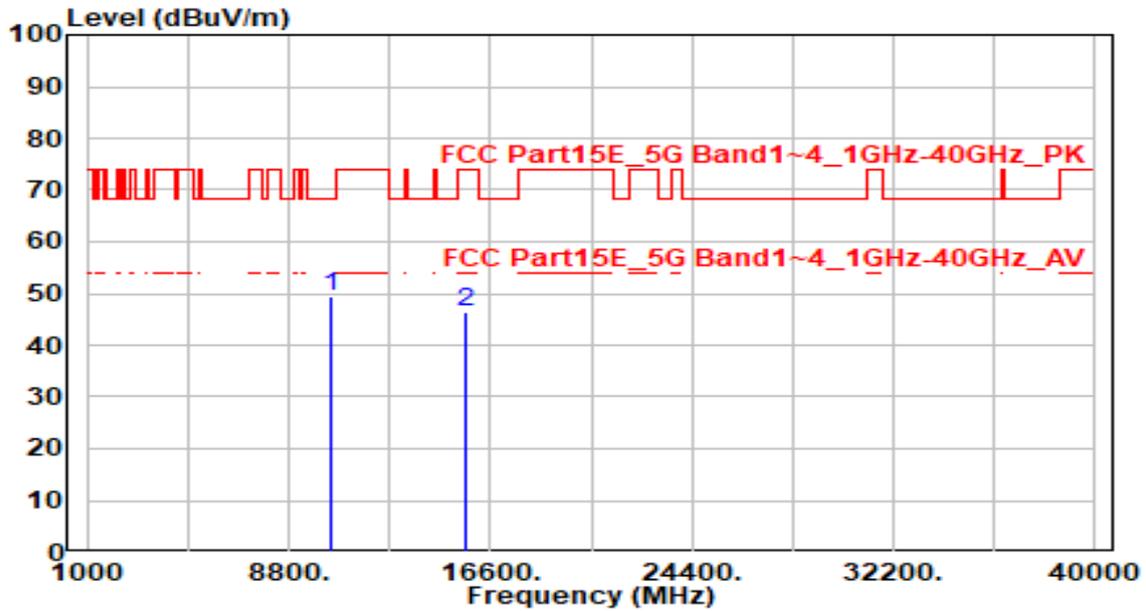


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	44.81	4.63	49.43	-18.77	68.20	200	210	Peak
2	15690.000	40.46	6.00	46.47	-27.53	74.00	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band2_CH 54_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

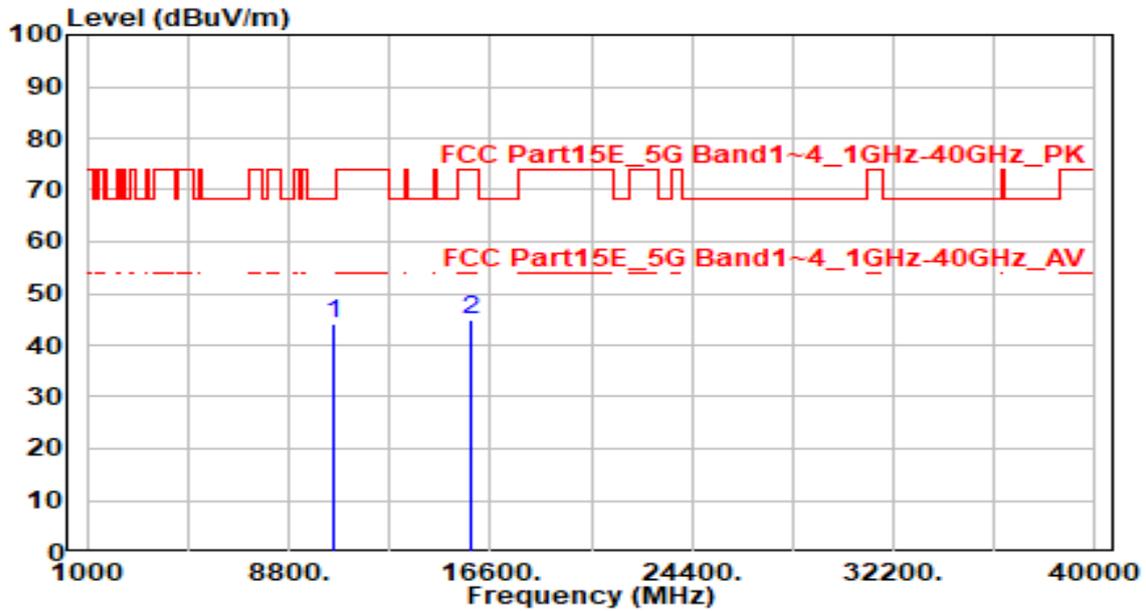


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	10540.000	39.49	4.65	44.14	-24.06	68.20	295	0	Peak
2		15810.000	38.63	6.11	44.74	-29.26	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band2_CH 54_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

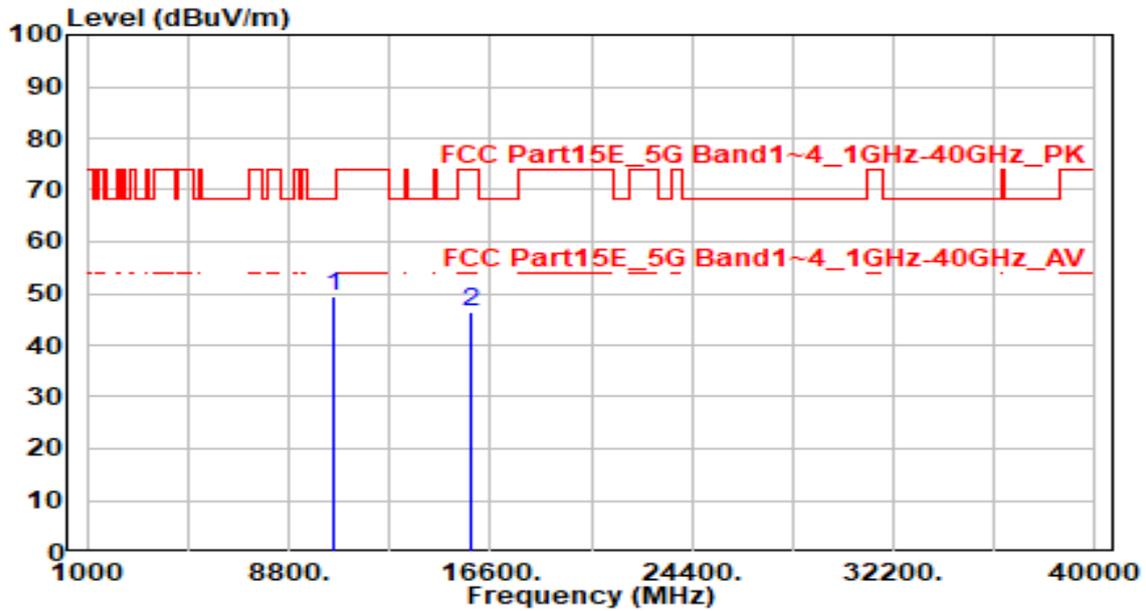


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	44.76	4.65	49.41	-18.79	68.20	200	115	Peak
2	15810.000	40.26	6.11	46.37	-27.63	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band2_CH 62_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

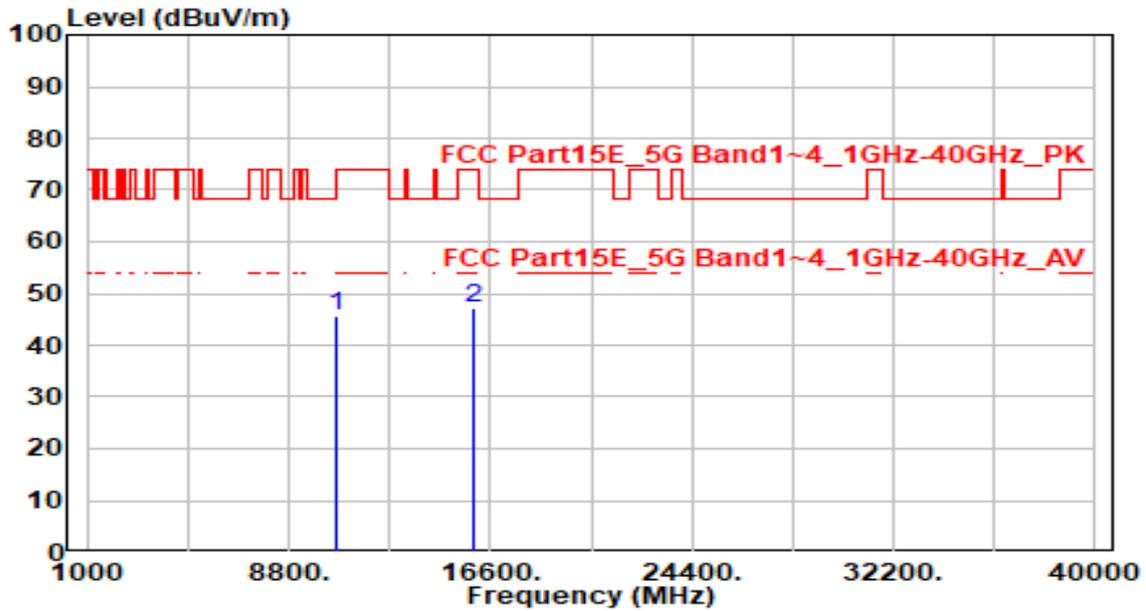


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	40.96	4.66	45.61	-28.39	74.00	300	360	Peak
2	* 15930.000	40.75	6.28	47.03	-26.97	74.00	205	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band2_CH 62_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

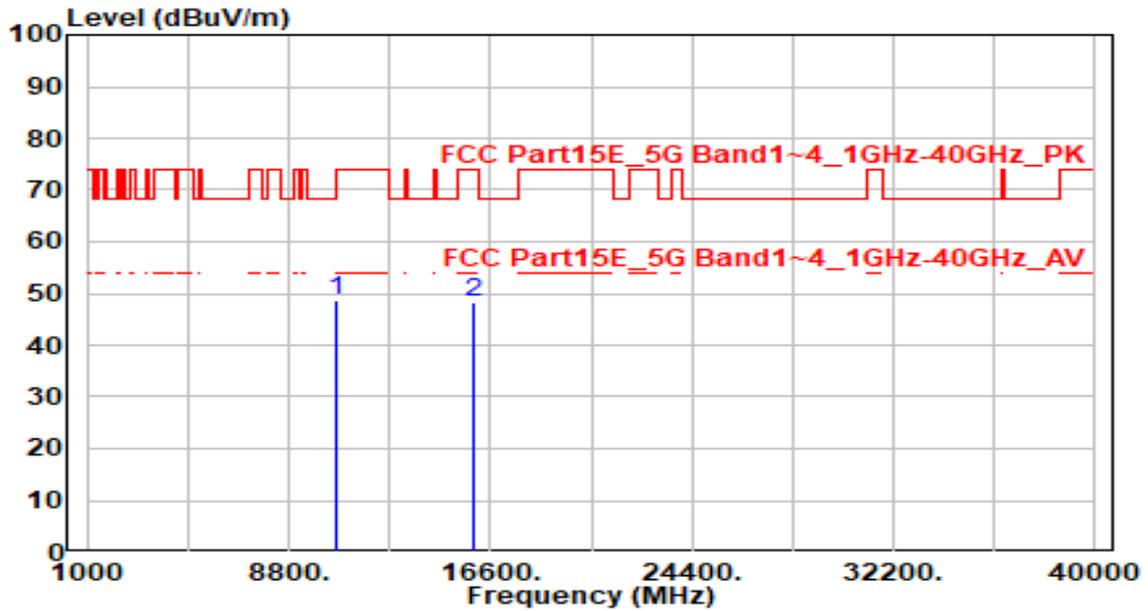


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10620.000	44.15	4.66	48.81	-25.19	74.00	200	190	Peak
2	15930.000	42.14	6.28	48.42	-25.58	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 102_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

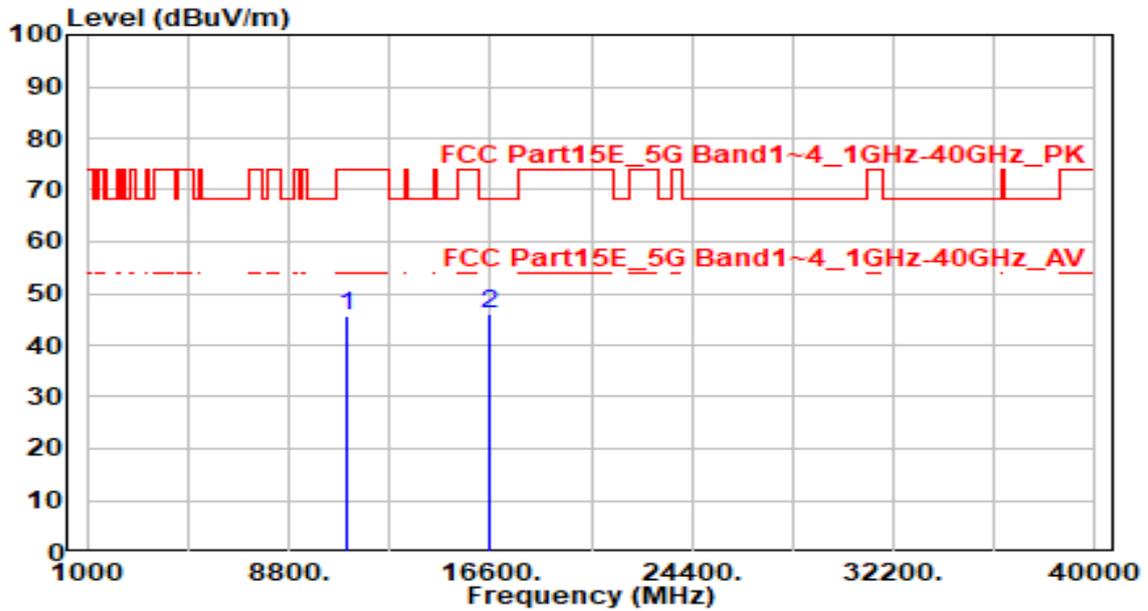


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	40.87	4.77	45.64	-28.36	74.00	200	170	Peak
2	* 16530.000	39.22	6.90	46.12	-22.08	68.20	200	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 102_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

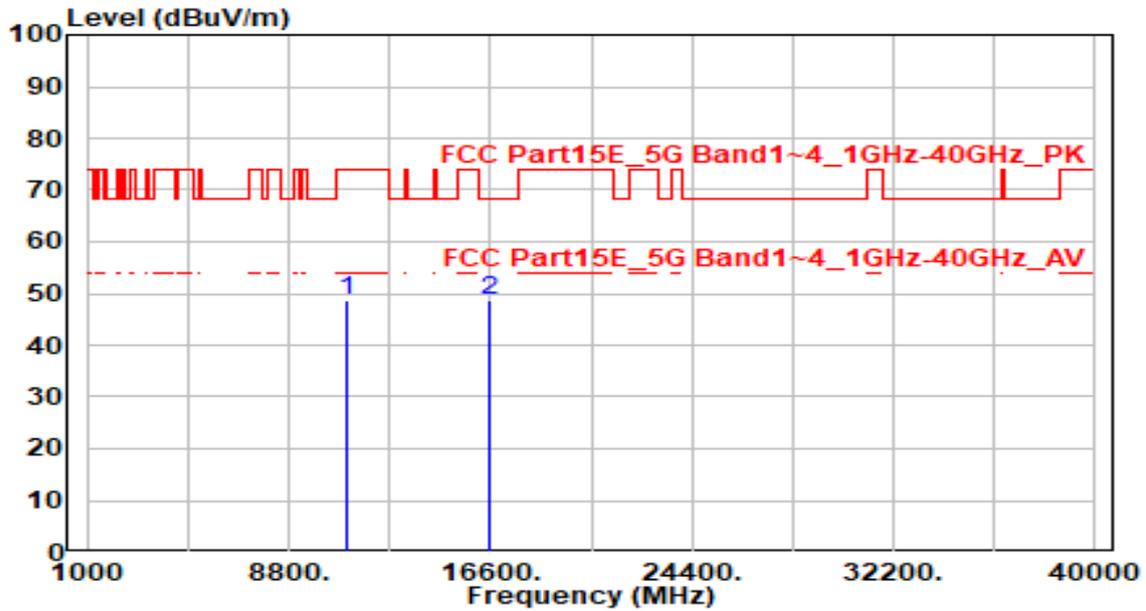


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	43.95	4.77	48.73	-25.27	74.00	200	200	Peak
2	* 16530.000	41.94	6.90	48.84	-19.36	68.20	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 110_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

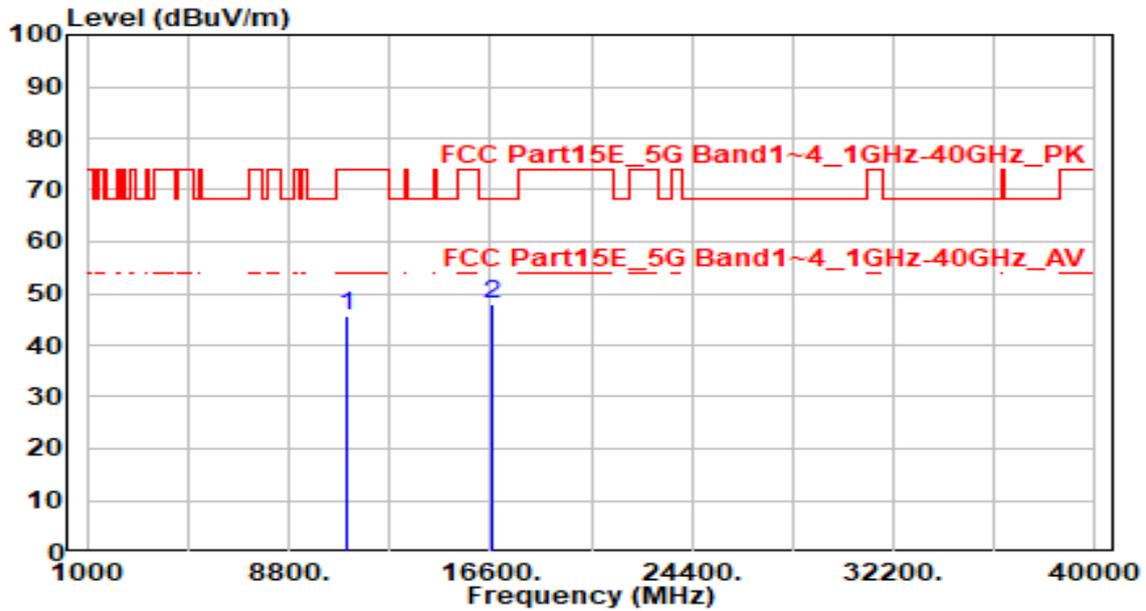


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	40.78	4.90	45.68	-28.32	74.00	200	150	Peak
2	* 16650.000	41.00	7.06	48.06	-20.14	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 110_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

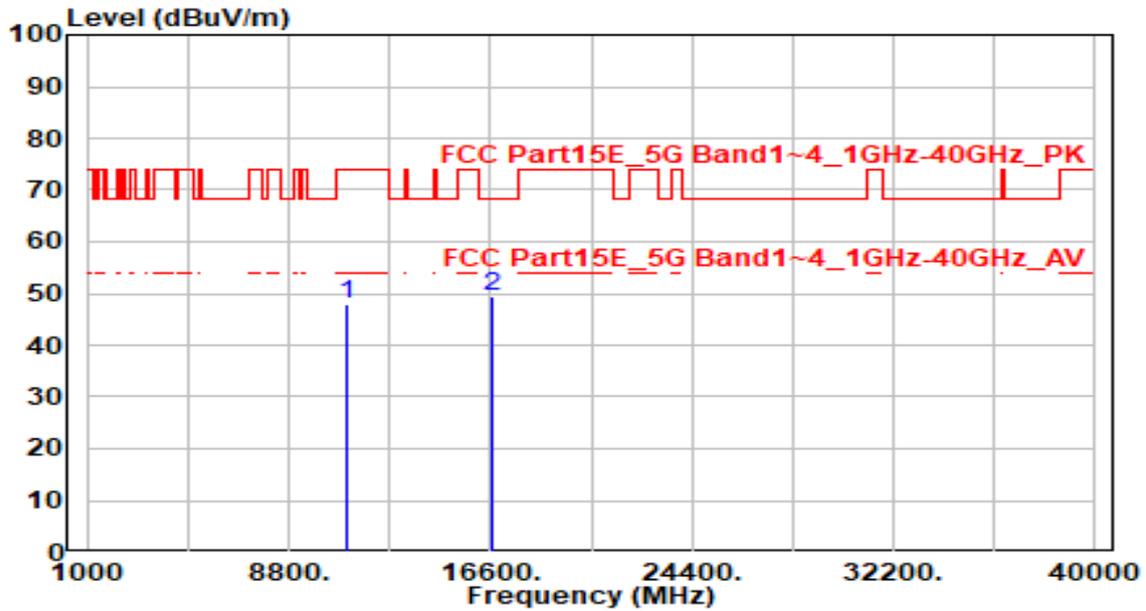


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	42.85	4.90	47.75	-26.25	74.00	200	150	Peak
2	* 16650.000	42.30	7.06	49.36	-18.84	68.20	200	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 134_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

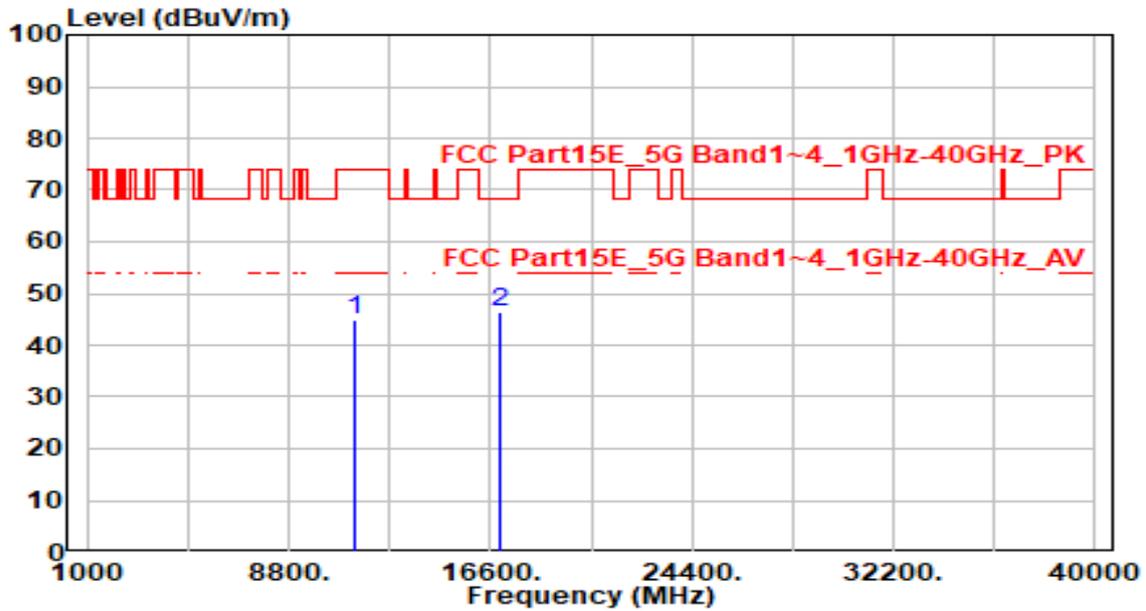


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	39.64	5.14	44.78	-29.22	74.00	200	220	Peak
2	* 17010.000	40.66	5.59	46.25	-21.95	68.20	200	300	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 134_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

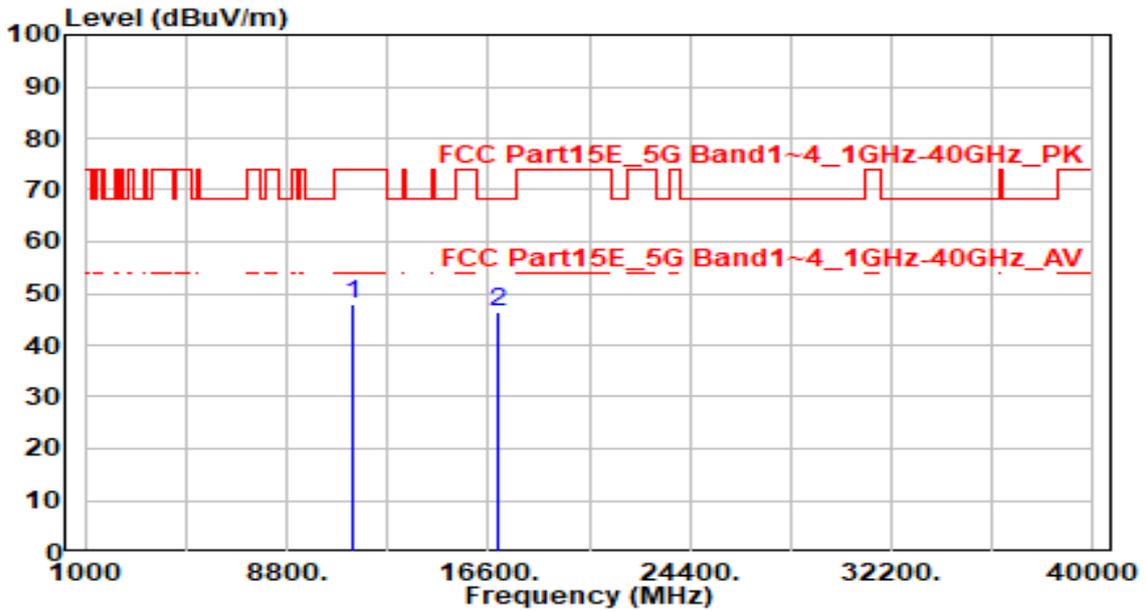


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.67	5.14	47.81	-26.19	74.00	200	120	Peak
2	* 17010.000	40.91	5.59	46.50	-21.70	68.20	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 142_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

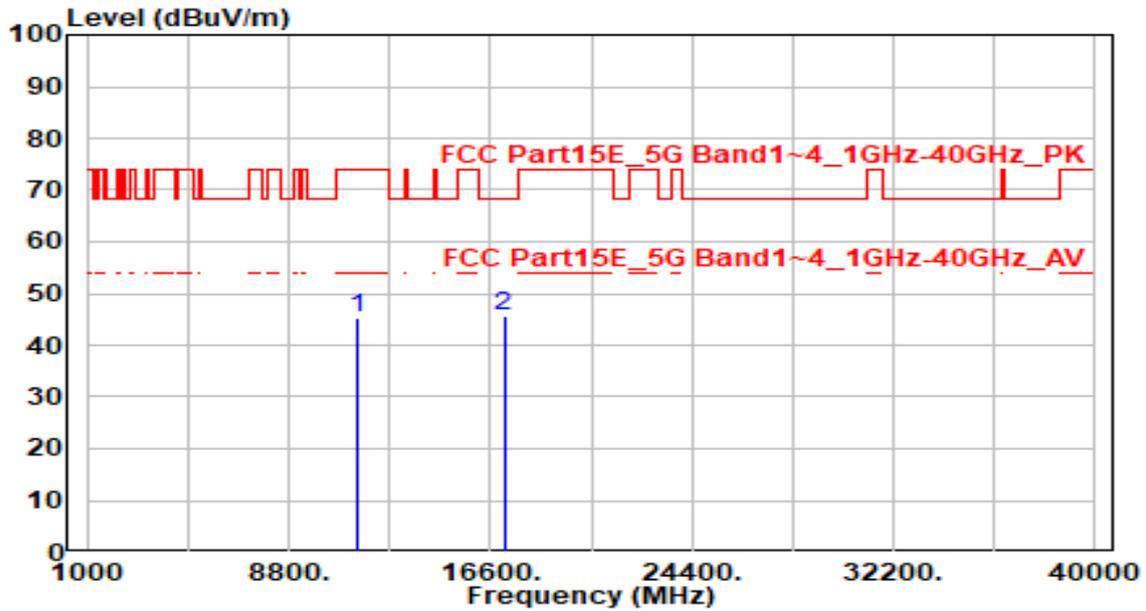


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	39.92	5.18	45.10	-28.90	74.00	200	225	Peak
2	* 17130.000	40.49	5.35	45.84	-22.36	68.20	200	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Date of Test	2022-03-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21.8°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac40_TX_Band3_CH 142_ANT 0+1+2+3 NSS4	Test Voltage	AC 120V/60Hz

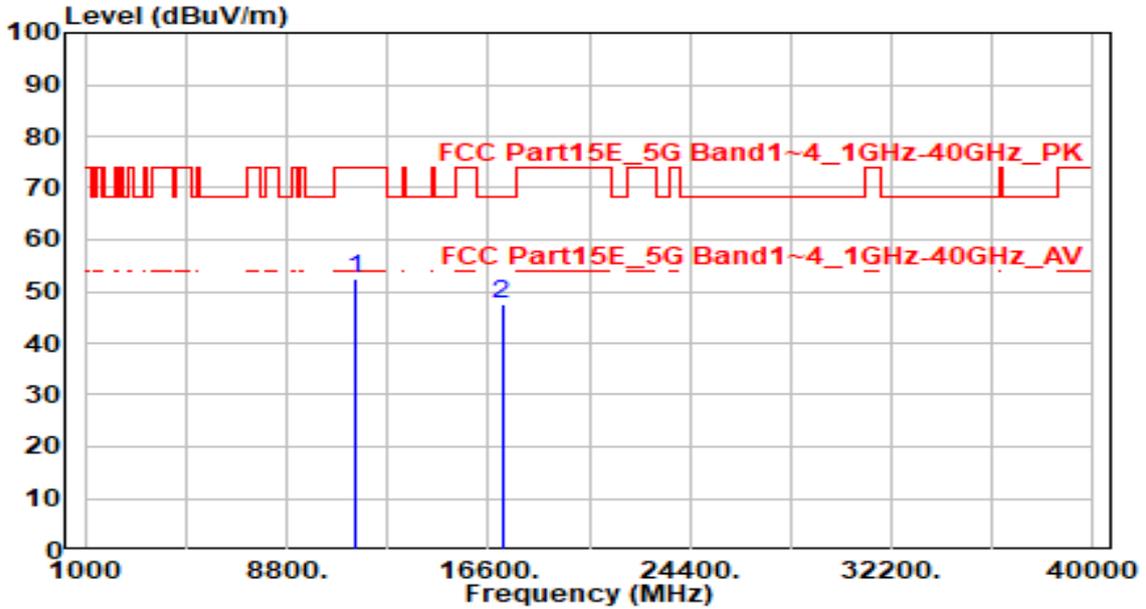

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	47.17	5.18	52.34	-21.66	74.00	200	150	Peak
2	* 17130.000	42.15	5.35	47.50	-20.70	68.20	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.