



802.11b Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)

Low Band Edge

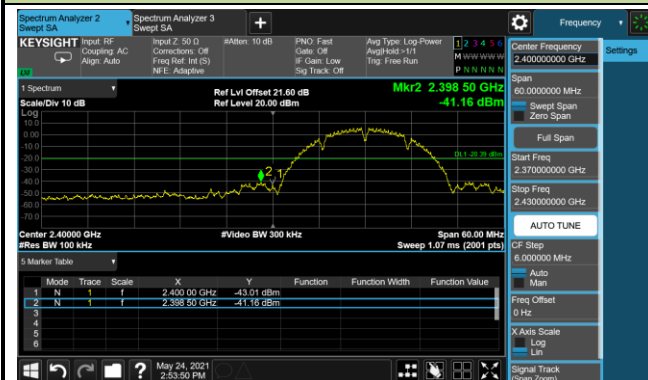


Spurious Emission

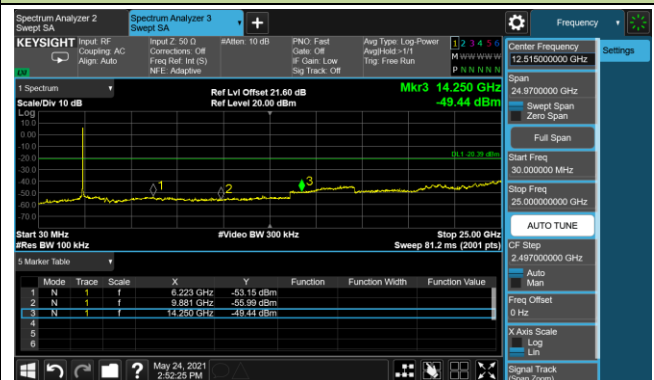


Channel 06 (2437MHz)

Spurious Emission

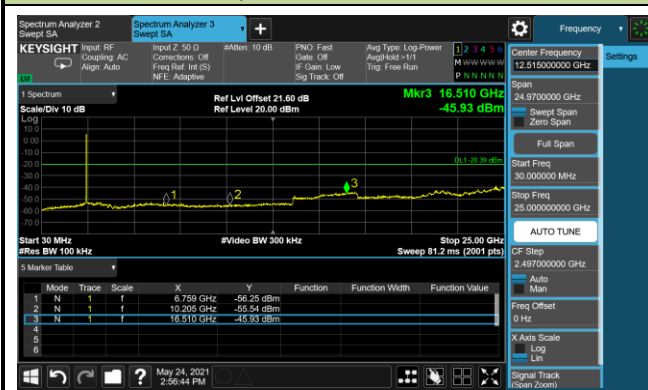


Channel 11 (2462MHz)

High Band Edge

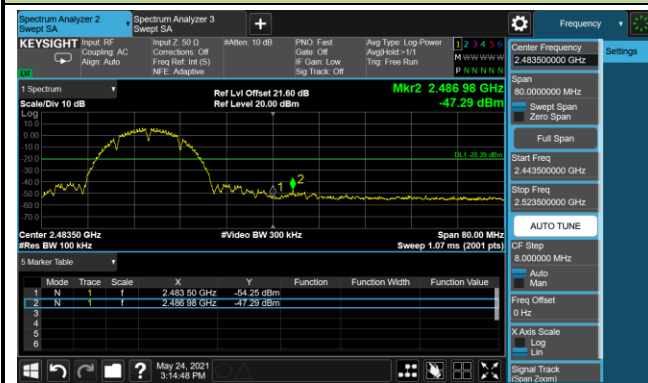


Spurious Emission

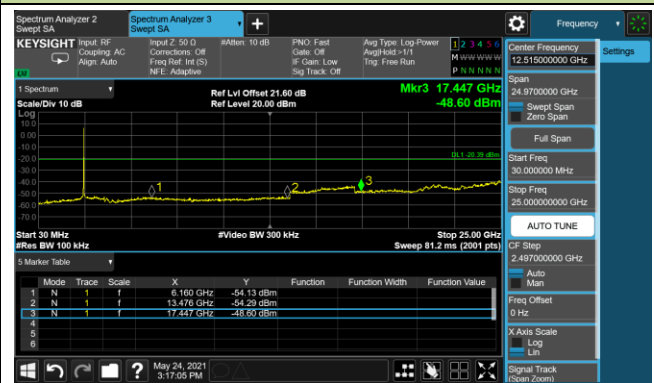


802.11g Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)

Low Band Edge

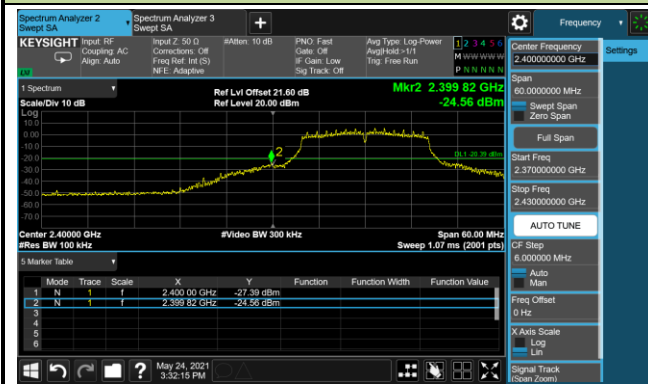


Spurious Emission

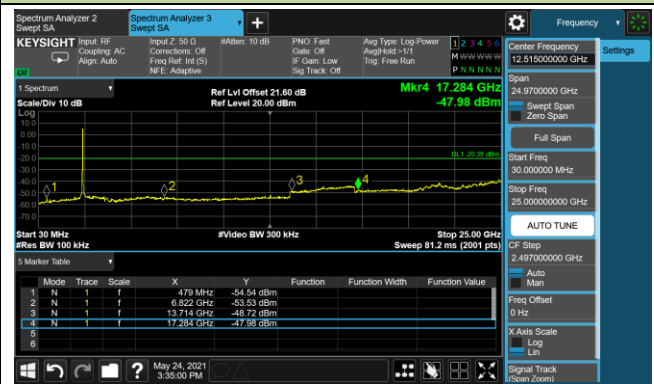

Channel 06 (2437MHz)

Spurious Emission

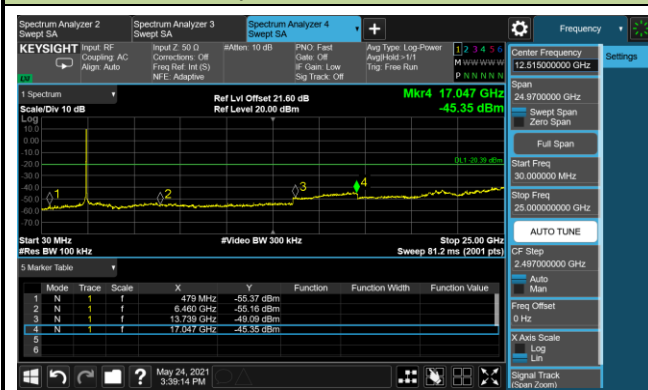


Channel 11 (2462MHz)

High Band Edge




Spurious Emission

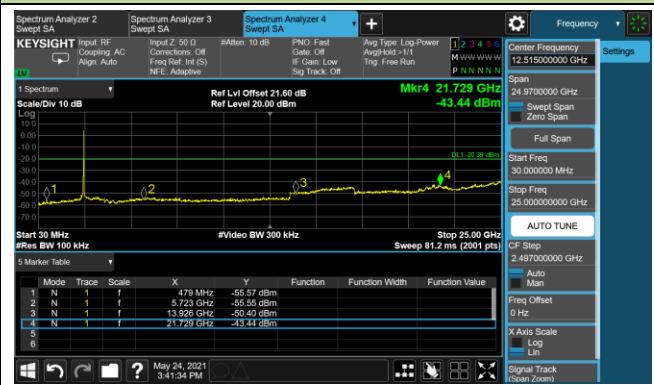


802.11n-HT20 Out-of-Band Emissions -Ant 1

Channel 01 (2412MHz)

Low Band Edge

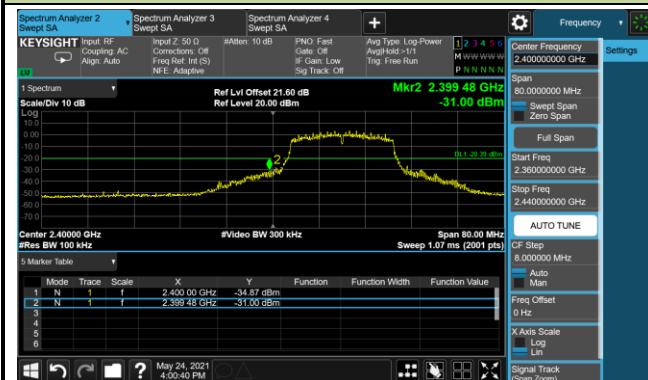


Spurious Emission

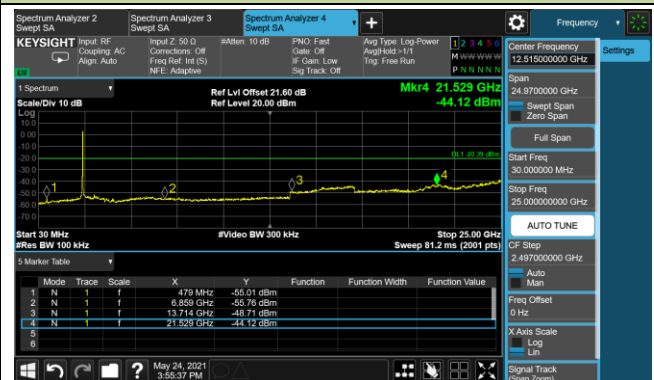


Channel 06 (2437MHz)

Spurious Emission

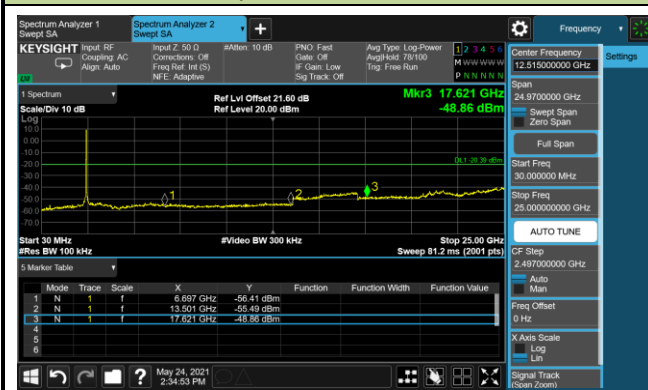


Channel 11 (2462MHz)

High Band Edge

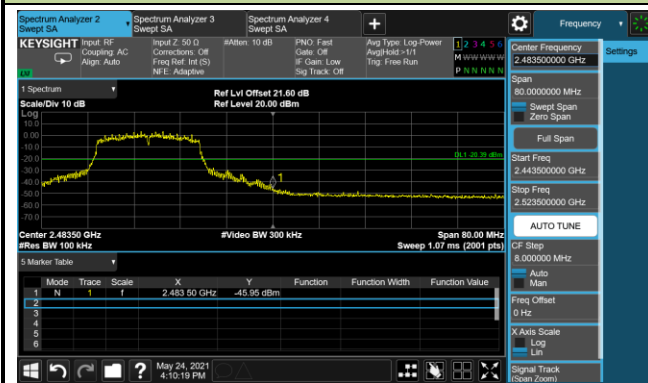


Spurious Emission

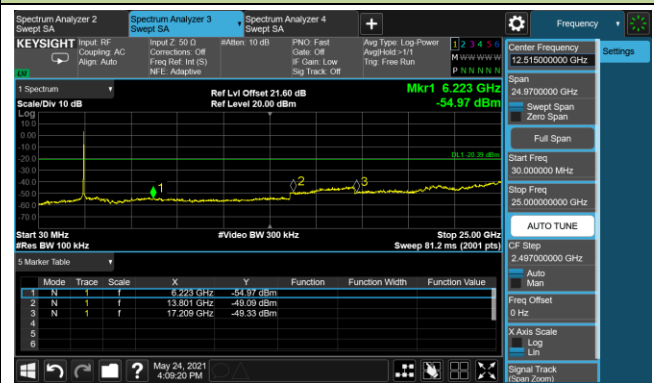


802.11n-HT40 Out-of-Band Emissions -Ant 1

Channel 03 (2422MHz)

Low Band Edge

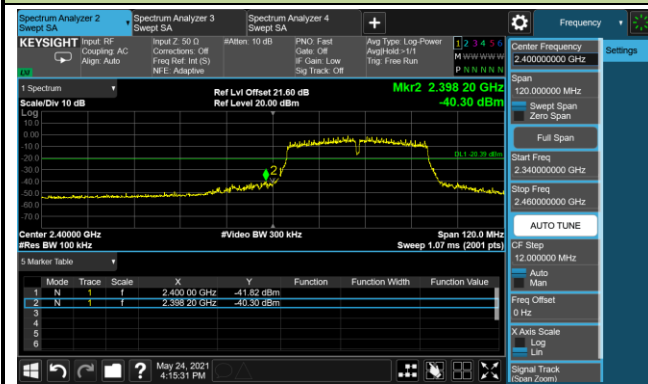


Spurious Emission

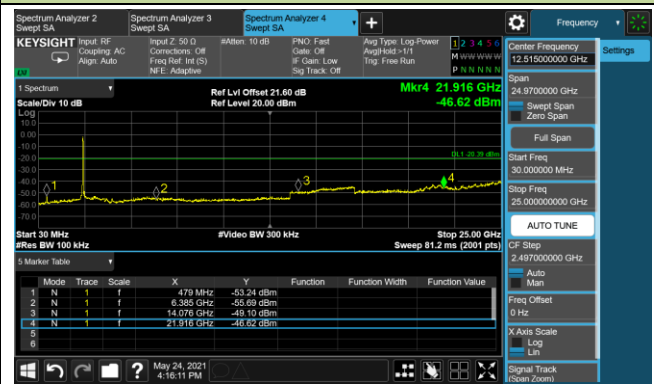

Channel 06 (2437MHz)

Spurious Emission

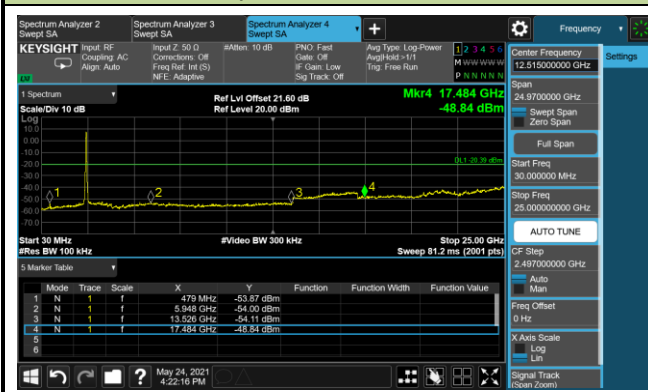


Channel 09 (2452MHz)

High Band Edge



Spurious Emission

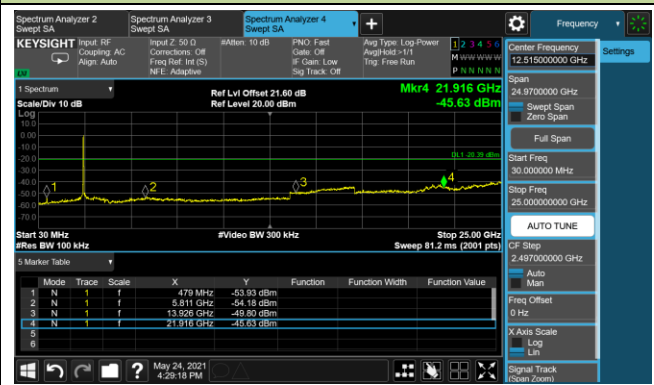

A.5 Radiated Spurious Emission Test Result

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/04/30	Test Mode:	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	47.4	3.0	50.4	74.0	-23.6	Peak	Horizontal
	7349.5	35.6	10.5	46.1	74.0	-27.9	Peak	Horizontal
	11489.0	35.5	16.4	51.9	74.0	-22.1	Peak	Horizontal
	4825.0	51.7	3.0	54.7	74.0	-19.3	Peak	Vertical
	4825.0	50.4	3.0	53.4	54.0	-0.6	Average	Vertical
	10741.0	36.0	15.8	51.8	74.0	-22.2	Peak	Vertical
	12058.5	36.1	15.9	52.0	74.0	-22.0	Peak	Vertical
06	4876.0	48.0	2.9	50.9	74.0	-23.1	Peak	Horizontal
	7315.5	37.7	10.3	48.0	74.0	-26.0	Peak	Horizontal
	11752.5	35.8	15.7	51.5	74.0	-22.5	Peak	Horizontal
	4874.0	50.3	2.9	53.2	54.0	-0.8	Average	Vertical
	4876.0	51.6	2.9	54.5	74.0	-19.5	Peak	Vertical
	7502.5	35.6	10.6	46.2	74.0	-27.8	Peak	Vertical
	11744.0	33.4	15.9	49.3	74.0	-24.7	Peak	Vertical
11	4927.0	47.3	3.1	50.4	74.0	-23.6	Peak	Horizontal
	7383.5	37.3	10.4	47.7	74.0	-26.3	Peak	Horizontal
	11225.5	35.1	15.9	51.0	74.0	-23.0	Peak	Horizontal
	4924.0	50.2	3.1	53.3	54.0	-0.7	Average	Vertical
	4927.0	51.2	3.1	54.3	74.0	-19.7	Peak	Vertical
	7332.5	34.0	10.3	44.3	74.0	-29.7	Peak	Vertical
	11242.5	32.3	15.7	48.0	74.0	-26.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/04/30	Test Mode:	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4816.5	45.7	3.0	48.7	74.0	-25.3	Peak	Horizontal
	8157.0	37.4	11.3	48.7	74.0	-25.3	Peak	Horizontal
	11540.0	33.6	16.6	50.2	74.0	-23.8	Peak	Horizontal
	4825.0	53.1	3.0	56.1	74.0	-17.9	Peak	Vertical
	4825.0	43.6	3.0	46.6	54.0	-7.4	Average	Vertical
	7502.5	34.7	10.6	45.3	74.0	-28.7	Peak	Vertical
	10970.5	35.6	15.8	51.4	74.0	-22.6	Peak	Vertical
06	4876.0	48.6	2.9	51.5	74.0	-22.5	Peak	Horizontal
	7307.0	38.6	10.4	49.0	74.0	-25.0	Peak	Horizontal
	11395.5	35.3	16.1	51.4	74.0	-22.6	Peak	Horizontal
	4875.0	45.6	2.9	48.5	54.0	-5.5	Average	Vertical
	4876.0	54.2	2.9	57.1	74.0	-16.9	Peak	Vertical
	7315.0	32.4	10.3	42.7	54.0	-11.3	Average	Vertical
	7315.5	44.3	10.3	54.6	74.0	-19.4	Peak	Vertical
	11973.5	36.4	15.6	52.0	74.0	-22.0	Peak	Vertical
11	4918.5	45.6	3.1	48.7	74.0	-25.3	Peak	Horizontal
	7383.5	36.7	10.4	47.1	74.0	-26.9	Peak	Horizontal
	8157.0	37.2	11.3	48.5	74.0	-25.5	Peak	Horizontal
	4925.0	41.3	3.1	44.4	54.0	-9.6	Average	Vertical
	4927.0	51.0	3.1	54.1	74.0	-19.9	Peak	Vertical
	7392.0	38.6	10.4	49.0	74.0	-25.0	Peak	Vertical
	10843.0	36.2	15.8	52.0	74.0	-22.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/04/30	Test Mode:	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	43.2	3.0	46.2	74.0	-27.8	Peak	Horizontal
	7400.5	36.3	10.5	46.8	74.0	-27.2	Peak	Horizontal
	11225.5	35.5	15.9	51.4	74.0	-22.6	Peak	Horizontal
	4825.0	51.7	3.0	54.7	74.0	-19.3	Peak	Vertical
	4825.0	40.0	3.0	43.0	54.0	-11.0	Average	Vertical
	7400.5	35.9	10.5	46.4	74.0	-27.6	Peak	Vertical
	11183.0	35.4	16.3	51.7	74.0	-22.3	Peak	Vertical
06	4876.0	46.4	2.9	49.3	74.0	-24.7	Peak	Horizontal
	7307.0	39.4	10.4	49.8	74.0	-24.2	Peak	Horizontal
	11038.5	35.8	16.2	52.0	74.0	-22.0	Peak	Horizontal
	4875.0	44.3	2.9	47.2	54.0	-6.8	Average	Vertical
	4876.0	54.1	2.9	57.0	74.0	-17.0	Peak	Vertical
	7307.0	43.2	10.4	53.6	74.0	-20.4	Peak	Vertical
	11378.5	35.1	16.1	51.2	74.0	-22.8	Peak	Vertical
11	4927.0	44.1	3.1	47.2	74.0	-26.8	Peak	Horizontal
	7383.5	36.7	10.4	47.1	74.0	-26.9	Peak	Horizontal
	11106.5	35.1	16.2	51.3	74.0	-22.7	Peak	Horizontal
	4918.5	48.2	3.1	51.3	74.0	-22.7	Peak	Vertical
	7383.5	37.5	10.4	47.9	74.0	-26.1	Peak	Vertical
	11055.5	35.7	16.1	51.8	74.0	-22.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/04/30	Test Mode:	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4850.5	40.4	2.9	43.3	74.0	-30.7	Peak	Horizontal
	7468.5	36.4	10.4	46.8	74.0	-27.2	Peak	Horizontal
	10809.0	36.6	15.5	52.1	74.0	-21.9	Peak	Horizontal
	4842.0	47.9	3.0	50.9	74.0	-23.1	Peak	Vertical
	7349.5	36.5	10.5	47.0	74.0	-27.0	Peak	Vertical
	10741.0	36.8	15.8	52.6	74.0	-21.4	Peak	Vertical
06	4876.0	44.3	2.9	47.2	74.0	-26.8	Peak	Horizontal
	7341.0	37.3	10.4	47.7	74.0	-26.3	Peak	Horizontal
	10758.0	36.5	15.4	51.9	74.0	-22.1	Peak	Horizontal
	4874.0	42.4	2.9	45.3	54.0	-8.7	Average	Vertical
	4876.0	51.5	2.9	54.4	74.0	-19.6	Peak	Vertical
	7315.5	39.7	10.3	50.0	74.0	-24.0	Peak	Vertical
	10962.0	36.0	15.9	51.9	74.0	-22.1	Peak	Vertical
09	4918.5	40.8	3.1	43.9	74.0	-30.1	Peak	Horizontal
	7400.5	36.9	10.5	47.4	74.0	-26.6	Peak	Horizontal
	11395.5	36.1	16.1	52.2	74.0	-21.8	Peak	Horizontal
	4918.5	45.5	3.1	48.6	74.0	-25.4	Peak	Vertical
	7375.0	36.3	10.5	46.8	74.0	-27.2	Peak	Vertical
	11302.0	35.0	16.2	51.2	74.0	-22.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2021/08/19 - 15:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

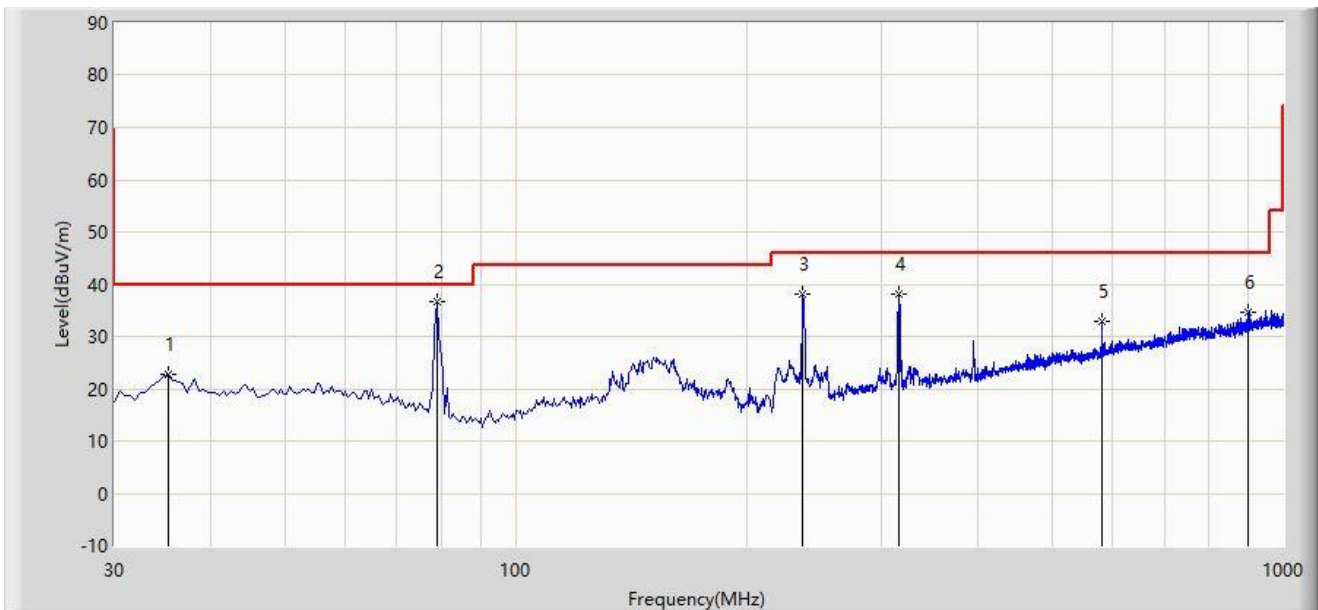

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			35.335	22.870	5.927	-17.130	40.000	16.943	PK
2		*	78.985	36.790	22.987	-3.210	40.000	13.802	PK
3			236.610	38.131	21.982	-7.869	46.000	16.149	PK
4			315.665	38.027	19.214	-7.973	46.000	18.812	PK
5			579.990	32.946	8.015	-13.054	46.000	24.931	PK
6			902.030	34.665	5.226	-11.335	46.000	29.439	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Time: 2021/08/19 - 15:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

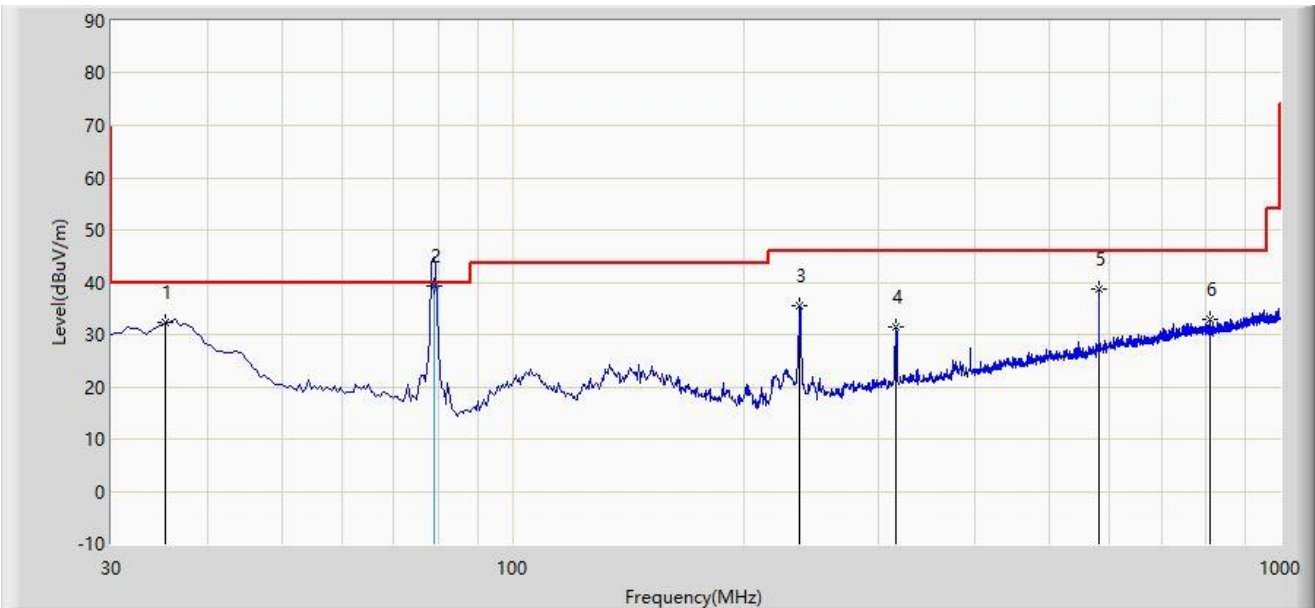

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			35.335	32.450	15.507	-7.550	40.000	16.943	PK
2		*	79.070	39.153	25.380	-0.847	40.000	13.774	QP
3			236.610	35.525	19.376	-10.475	46.000	16.149	PK
4			315.180	31.594	12.795	-14.406	46.000	18.799	PK
5			579.990	38.559	13.628	-7.441	46.000	24.931	PK
6			809.880	32.948	4.543	-13.052	46.000	28.405	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.6 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Time: 2021/04/30 - 13:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2412MHz	

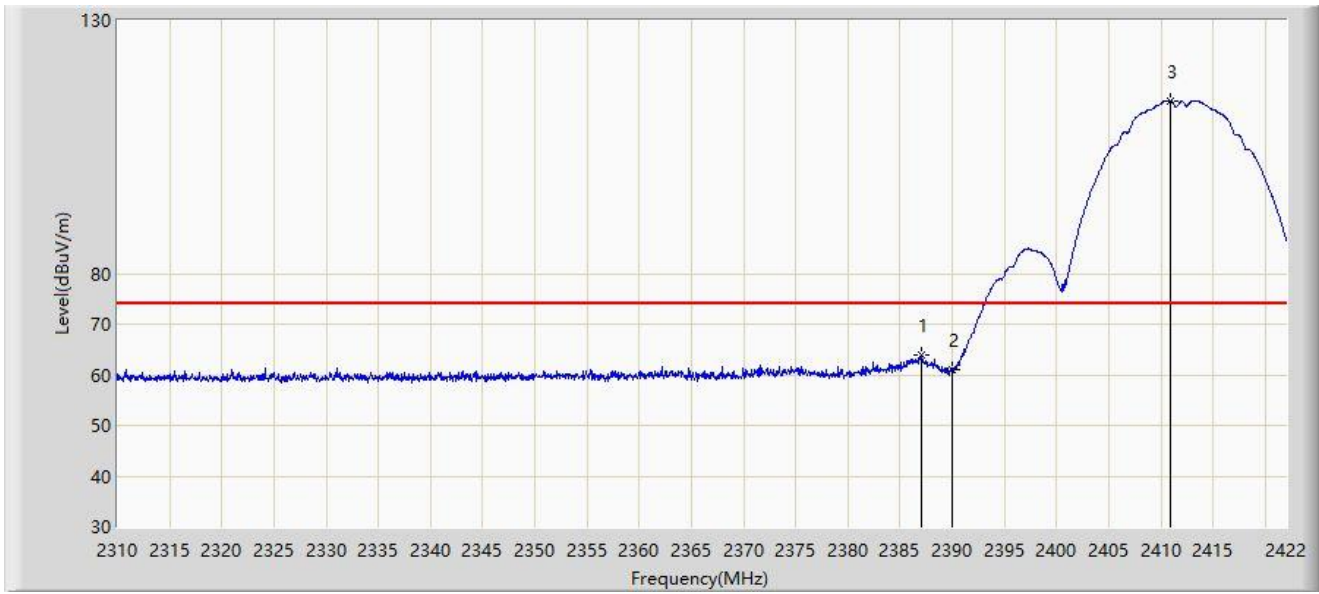

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2387.112	63.932	33.019	-10.068	74.000	30.912	PK
2			2390.000	60.956	30.050	-13.044	74.000	30.906	PK
3		*	2410.856	114.171	83.275	N/A	N/A	30.896	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2387.280	53.112	22.200	-0.888	54.000	30.913	AV
2			2390.000	49.773	18.867	-4.227	54.000	30.906	AV
3		*	2411.192	111.114	80.218	N/A	N/A	30.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 11:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2412MHz	

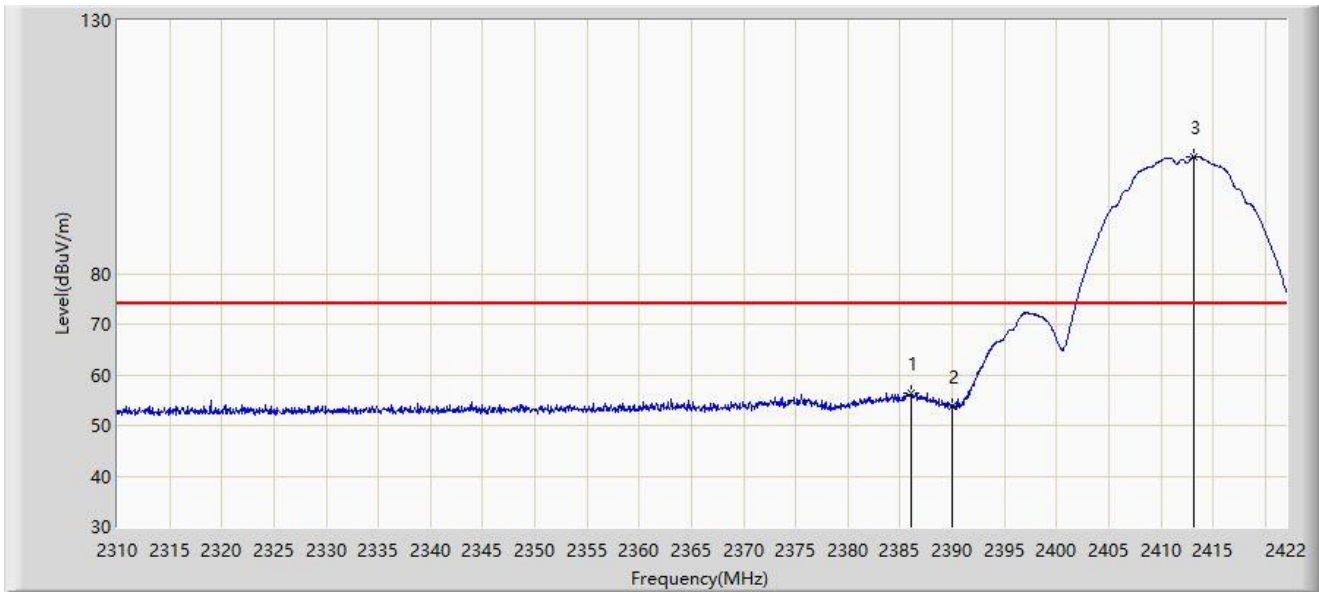

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2386.048	56.343	25.428	-17.657	74.000	30.915	PK
2			2390.000	53.725	22.819	-20.275	74.000	30.906	PK
3		*	2413.152	103.085	72.193	N/A	N/A	30.892	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2385.208	47.175	16.258	-6.825	54.000	30.917	AV
2			2390.000	45.759	14.853	-8.241	54.000	30.906	AV
3		*	2411.304	99.431	68.535	N/A	N/A	30.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2452MHz	

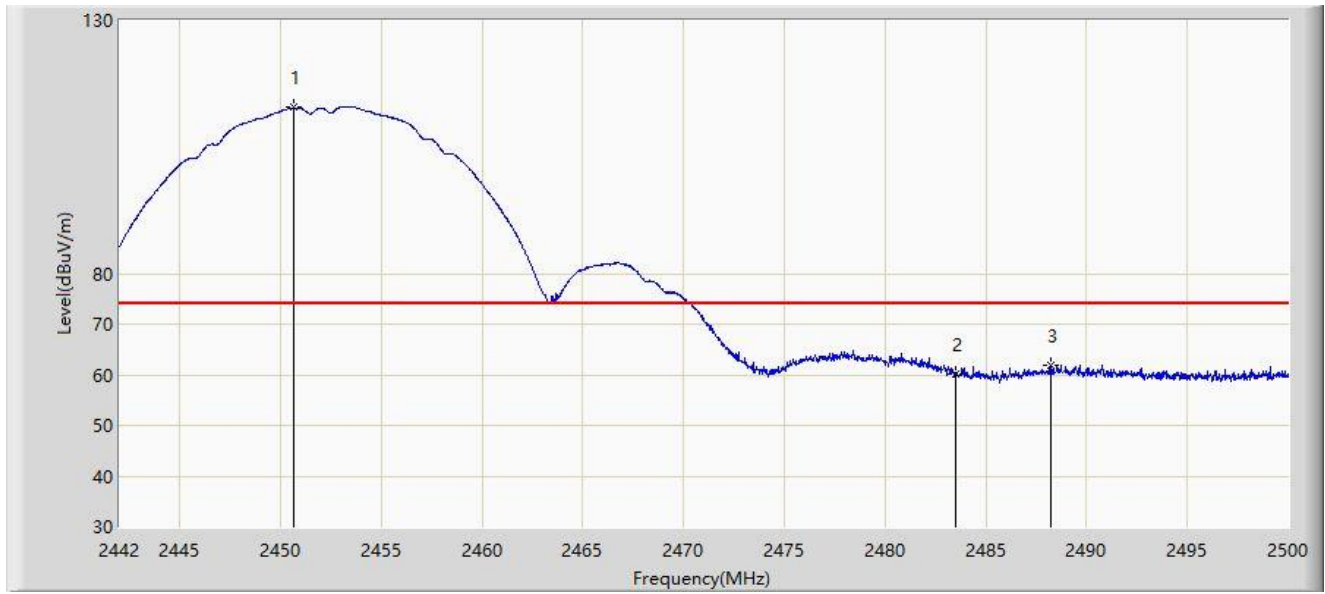


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2450.671	112.772	80.839	N/A	N/A	31.933	PK
2			2483.500	60.113	28.201	-13.887	74.000	31.912	PK
3			2488.226	61.863	29.961	-12.137	74.000	31.902	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2452MHz	

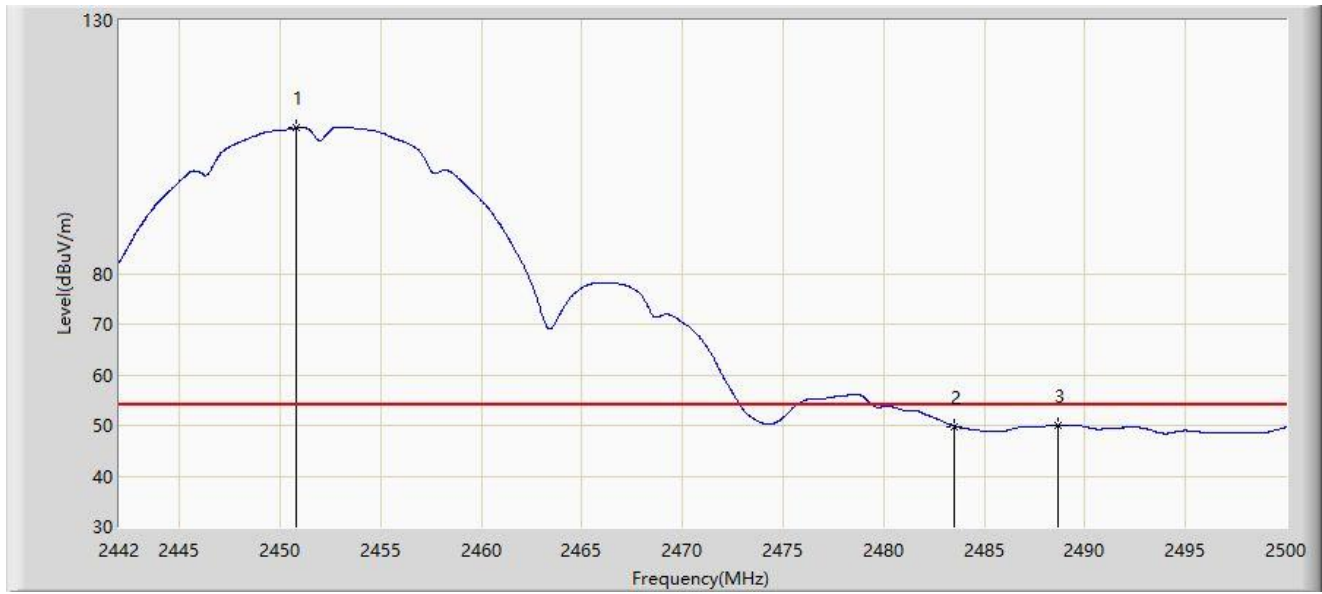


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2450.787	108.742	76.809	N/A	N/A	31.933	AV
2			2483.500	49.847	17.935	-4.153	54.000	31.912	AV
3			2488.661	50.036	18.135	-3.964	54.000	31.901	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2452MHz	

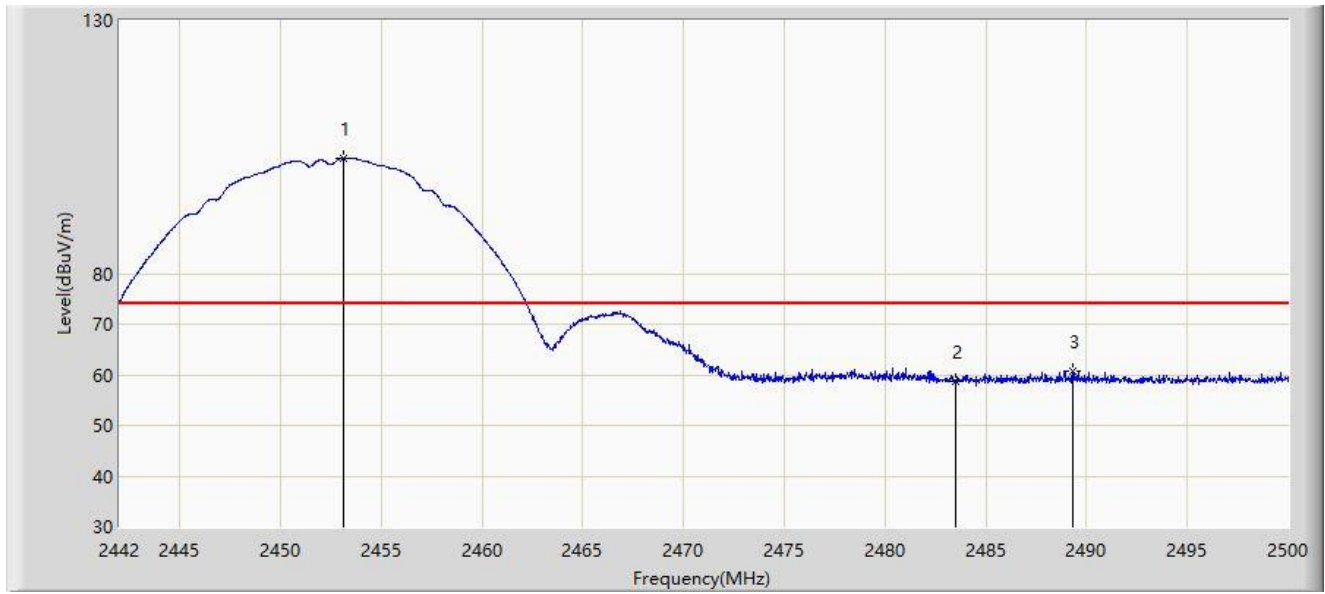


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2453.107	102.832	70.900	N/A	N/A	31.933	PK
2			2483.500	58.674	26.762	-15.326	74.000	31.912	PK
3			2489.299	60.772	28.872	-13.228	74.000	31.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2452MHz	

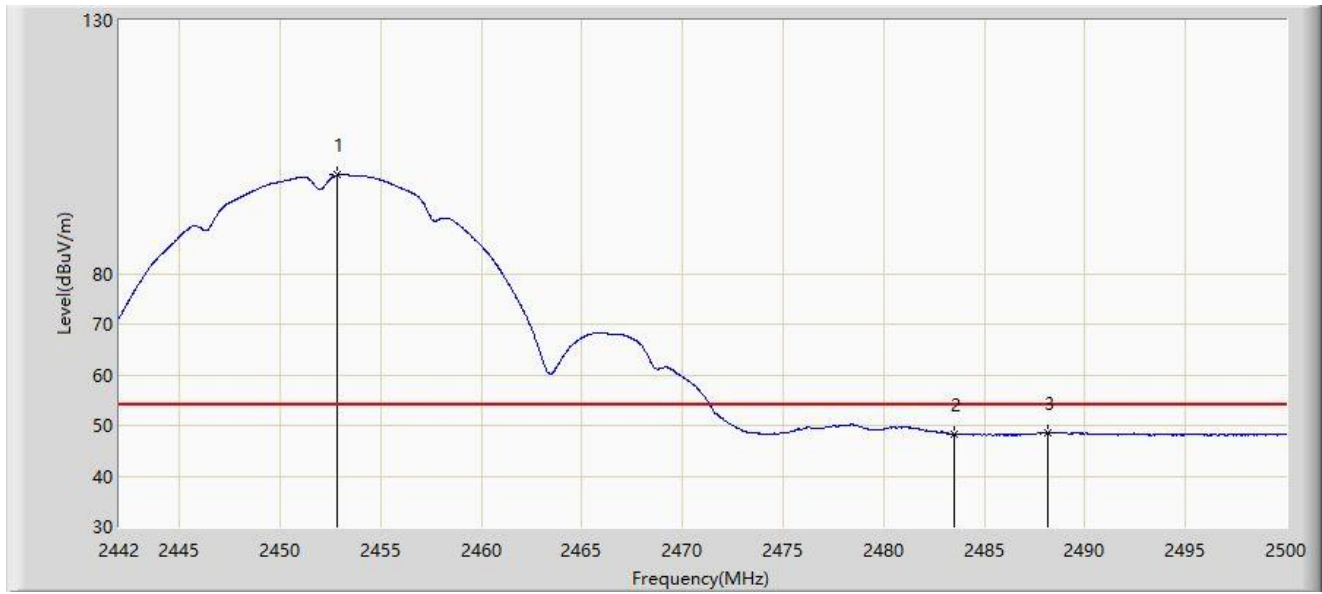


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2452.846	99.429	67.497	N/A	N/A	31.932	AV
2			2483.500	48.254	16.342	-5.746	54.000	31.912	AV
3			2488.139	48.548	16.646	-5.452	54.000	31.902	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2457MHz	

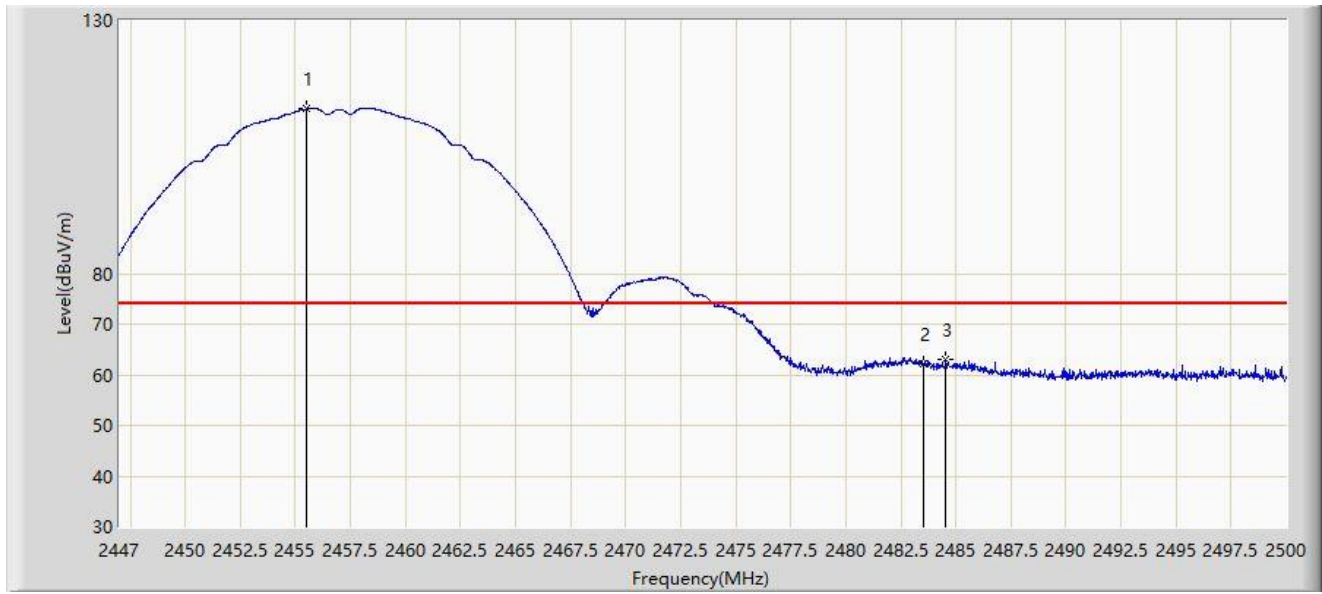


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2455.507	112.474	80.542	N/A	N/A	31.932	PK
2			2483.500	62.124	30.212	-11.876	74.000	31.912	PK
3			2484.551	63.149	31.239	-10.851	74.000	31.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2457MHz	

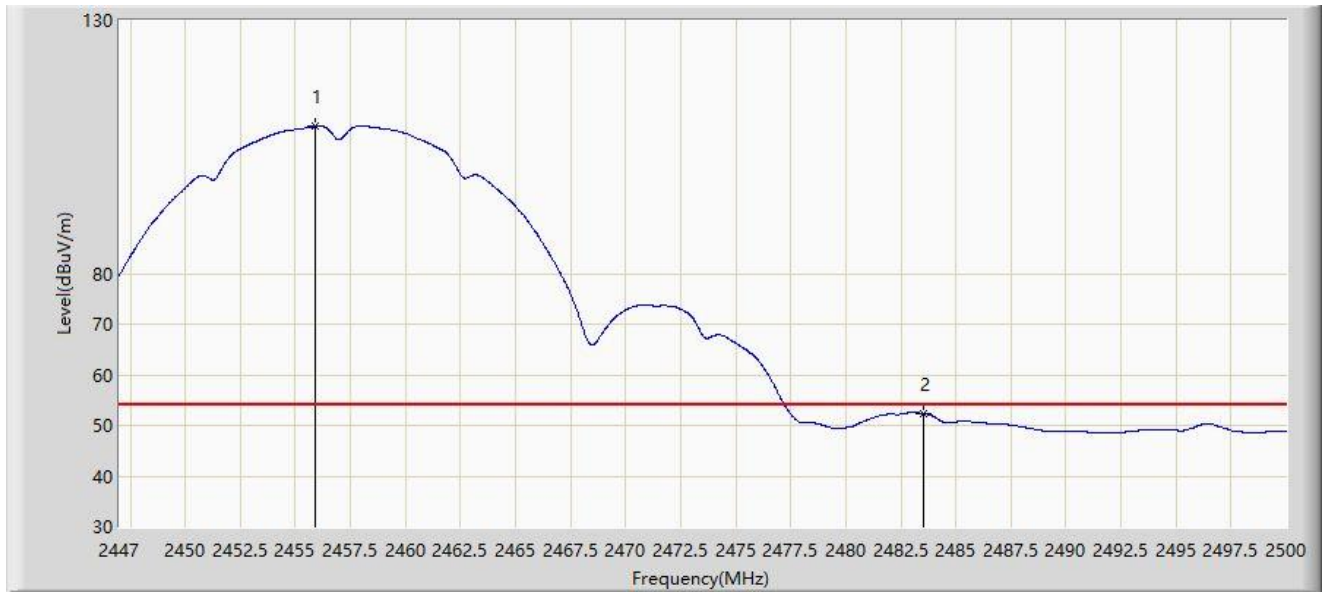


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2455.904	109.061	77.129	N/A	N/A	31.932	AV
2			2483.500	52.319	20.407	-1.681	54.000	31.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2457MHz	

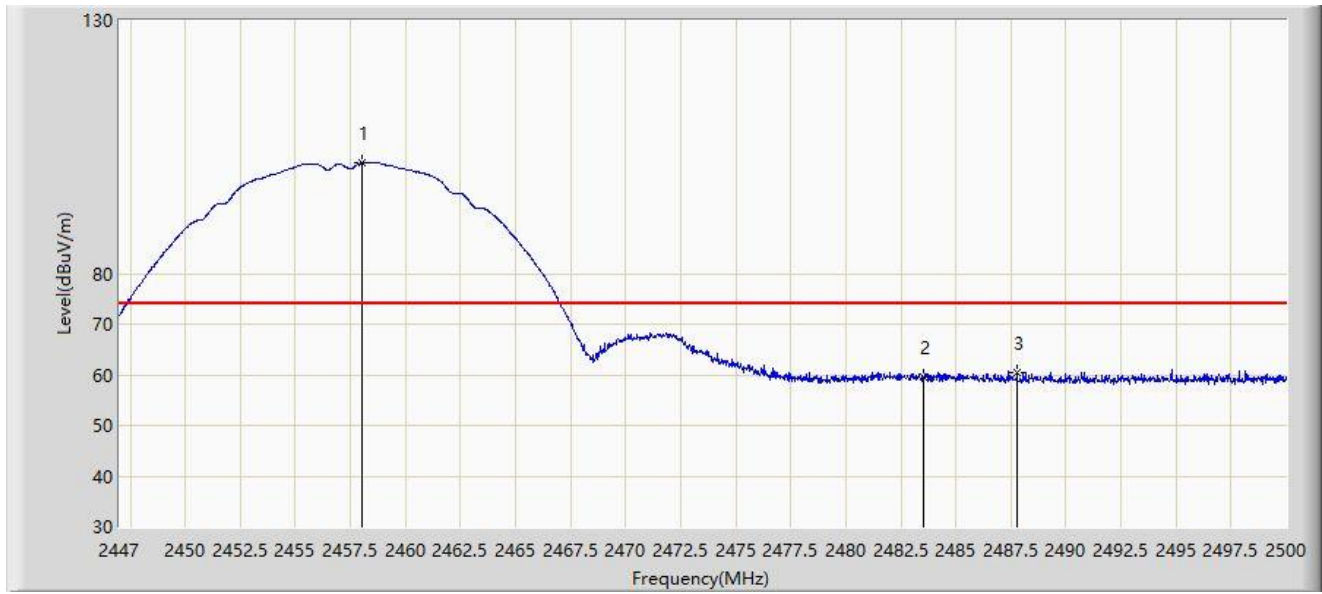


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2458.051	101.919	69.989	N/A	N/A	31.930	PK
2			2483.500	59.492	27.580	-14.508	74.000	31.912	PK
3			2487.783	60.443	28.540	-13.557	74.000	31.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2457MHz	

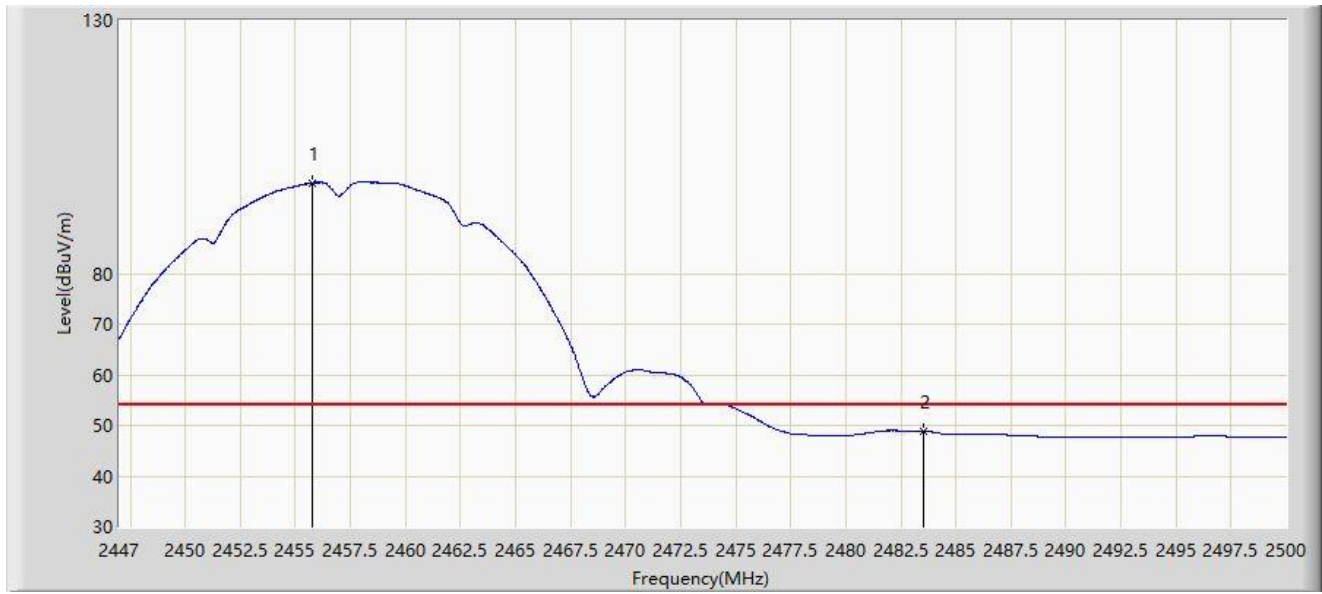


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2455.745	97.876	65.944	N/A	N/A	31.932	AV
2			2483.500	48.848	16.936	-5.152	54.000	31.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2462MHz	

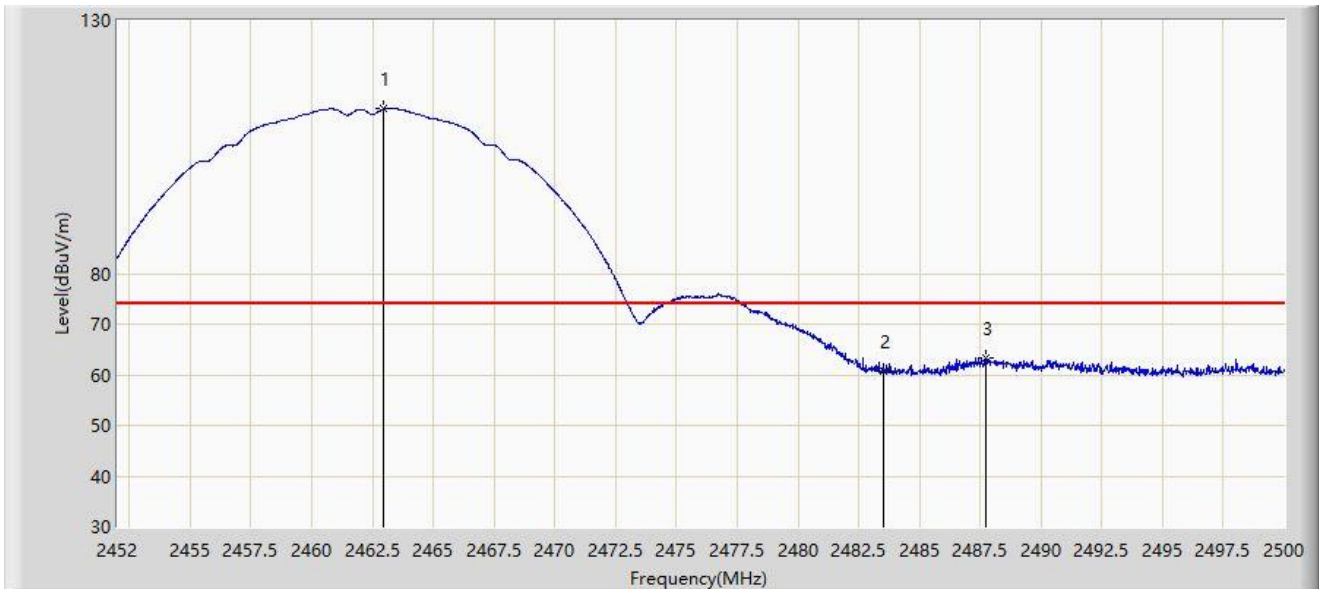


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.944	112.467	81.615	N/A	N/A	30.852	PK
2			2483.500	60.732	29.844	-13.268	74.000	30.888	PK
3			2487.736	63.461	32.576	-10.539	74.000	30.885	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2462MHz	

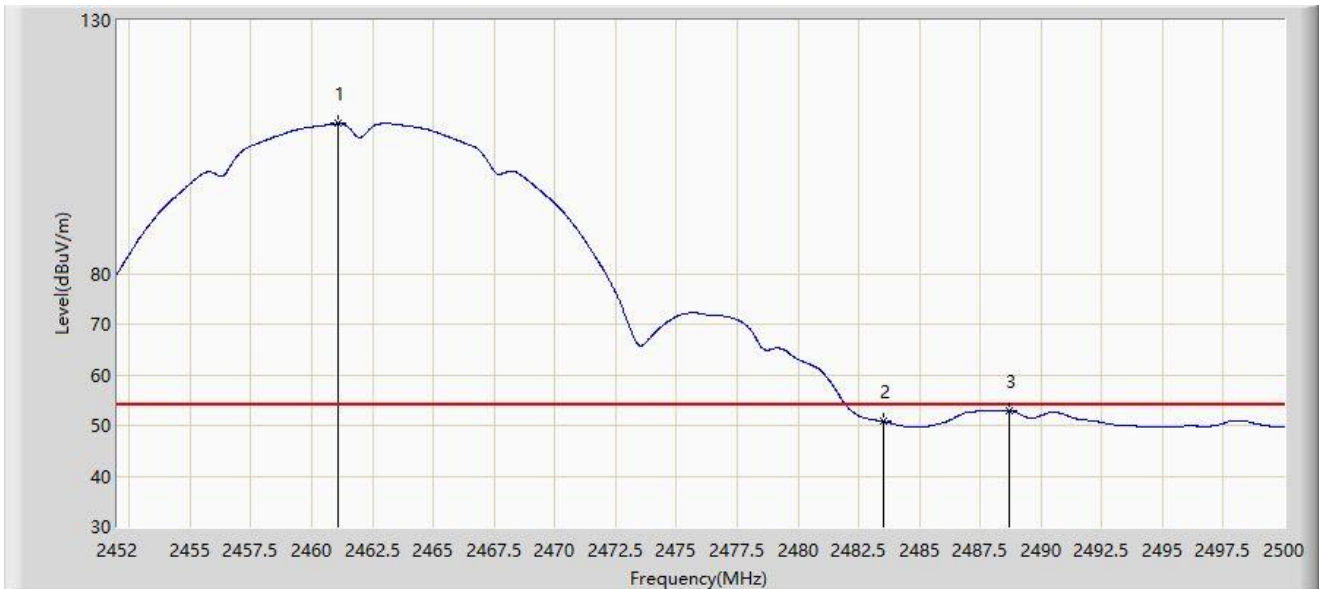


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	X	*	2461.072	109.601	78.751	N/A	N/A	30.850	AV
2			2483.500	50.814	19.926	-3.186	54.000	30.888	AV
3			2488.672	52.920	22.036	-1.080	54.000	30.884	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2462MHz	

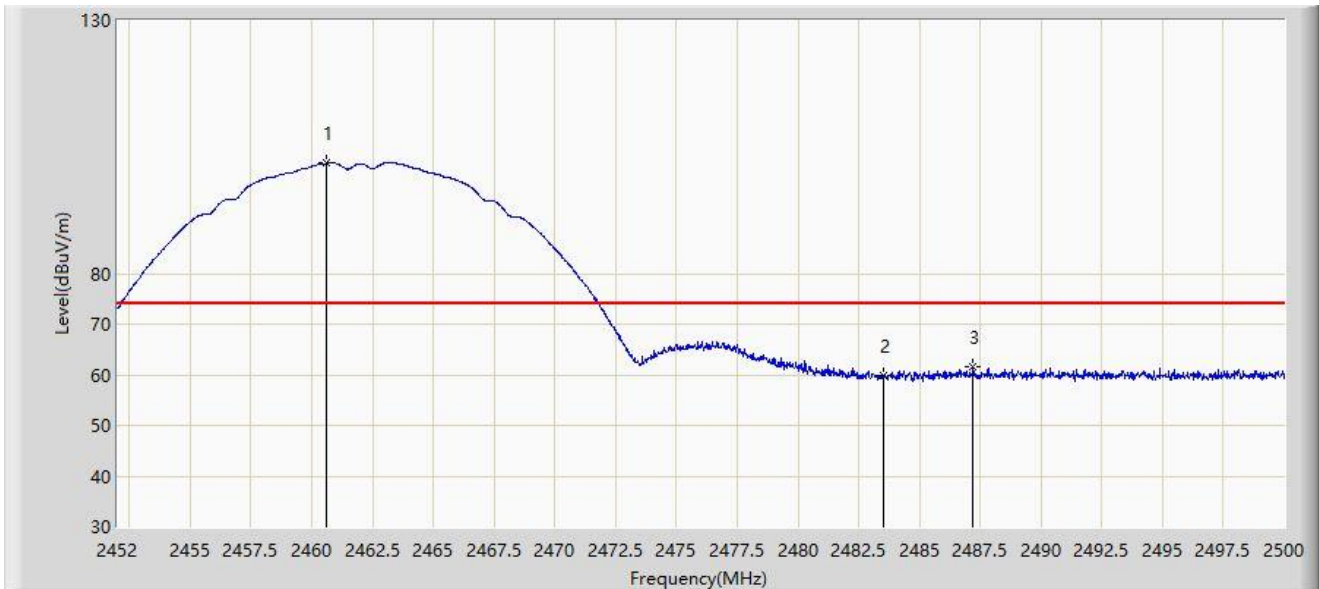

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2460.616	101.860	71.010	N/A	N/A	30.850	PK
2			2483.500	59.805	28.917	-14.195	74.000	30.888	PK
3			2487.184	61.562	30.677	-12.438	74.000	30.885	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2461.168	98.922	68.072	N/A	N/A	30.849	AV
2			2483.500	48.527	17.639	-5.473	54.000	30.888	AV
3			2488.264	49.137	18.252	-4.863	54.000	30.885	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

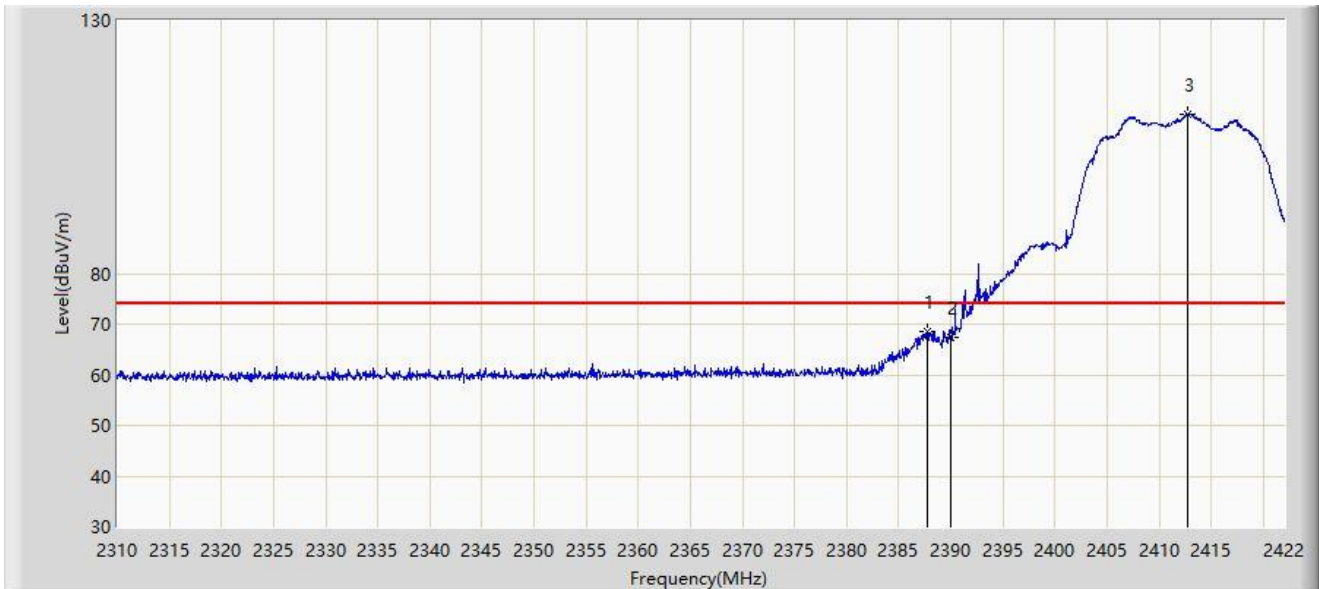


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2387.728	68.472	37.561	-5.528	74.000	30.911	PK
2			2390.000	67.337	36.431	-6.663	74.000	30.906	PK
3		*	2412.760	111.524	80.631	N/A	N/A	30.892	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 13:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

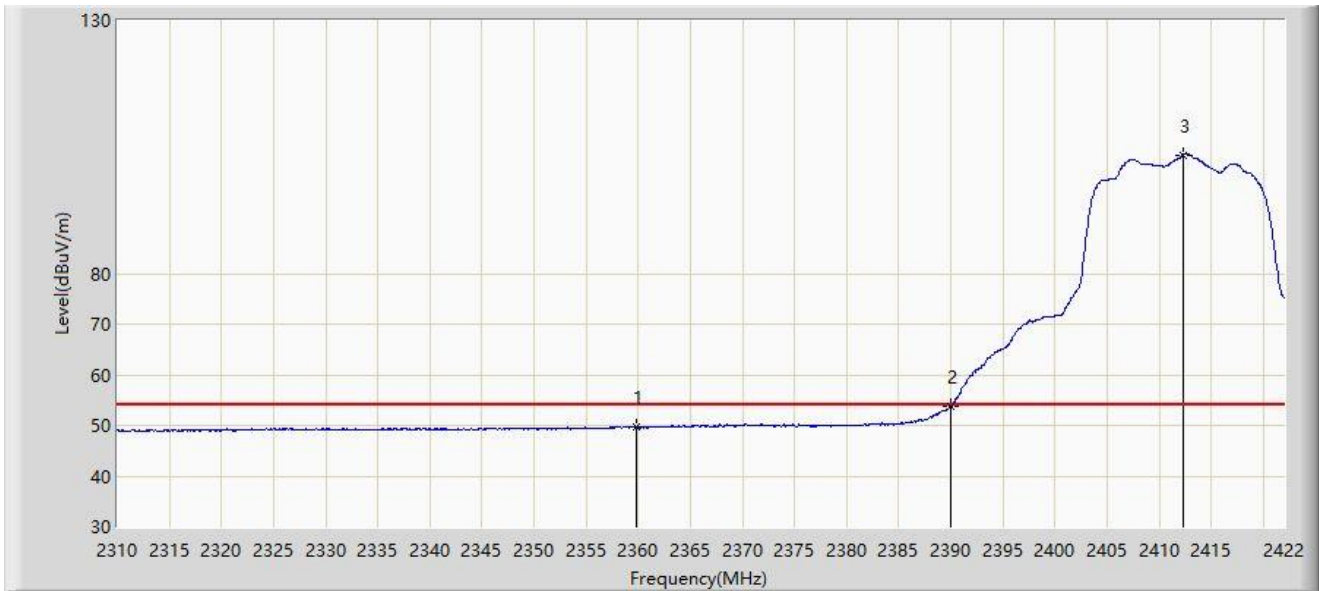


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2359.840	49.720	18.744	-4.280	54.000	30.976	AV
2			2390.000	53.694	22.788	-0.306	54.000	30.906	AV
3		*	2412.312	103.452	72.558	N/A	N/A	30.894	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

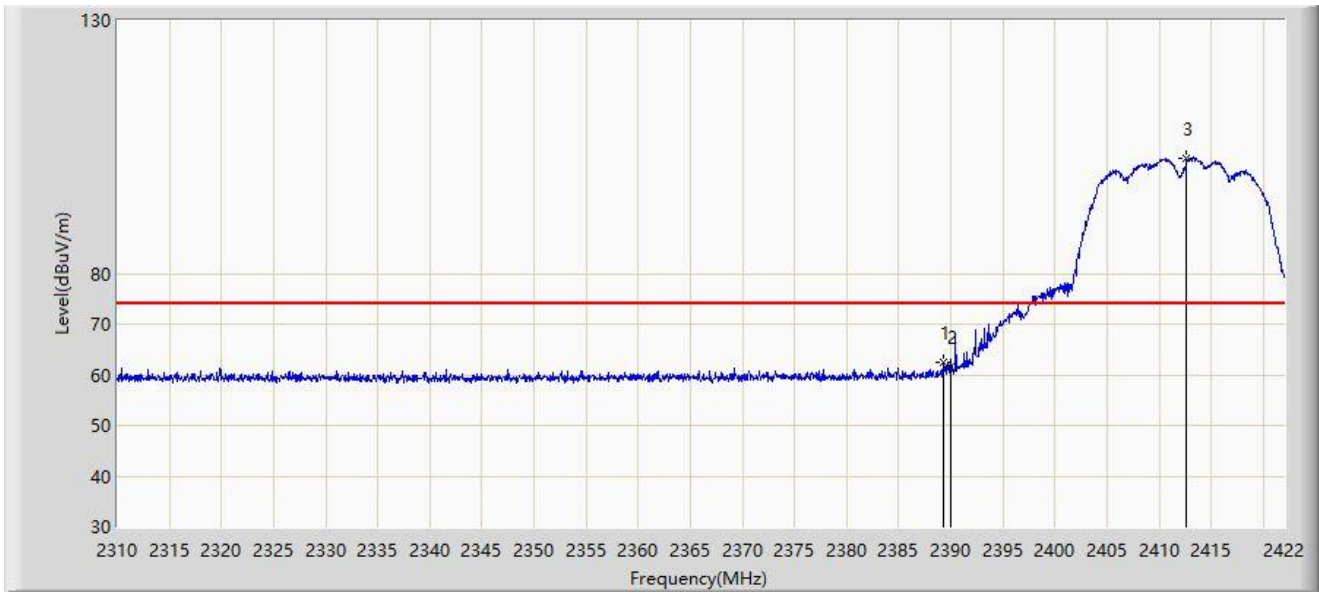


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.296	62.572	31.664	-11.428	74.000	30.908	PK
2			2390.000	61.477	30.571	-12.523	74.000	30.906	PK
3		*	2412.648	102.873	71.980	N/A	N/A	30.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

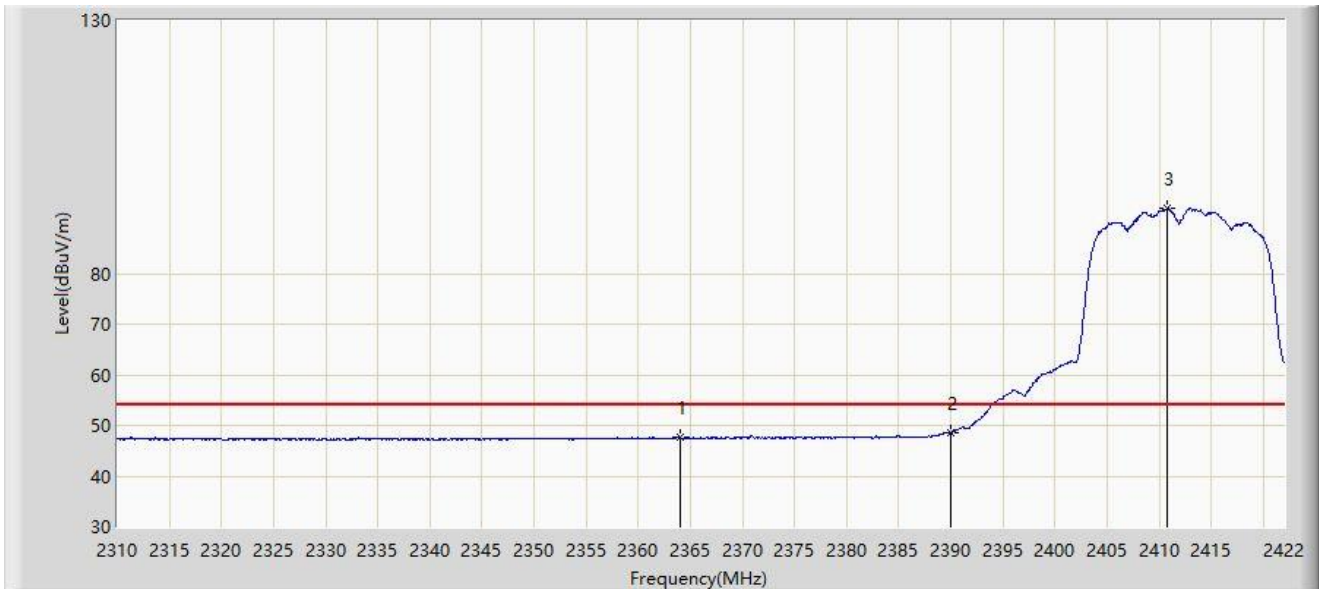


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2364.040	47.563	16.596	-6.437	54.000	30.966	AV
2			2390.000	48.641	17.735	-5.359	54.000	30.906	AV
3		*	2410.800	92.921	62.025	N/A	N/A	30.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz	

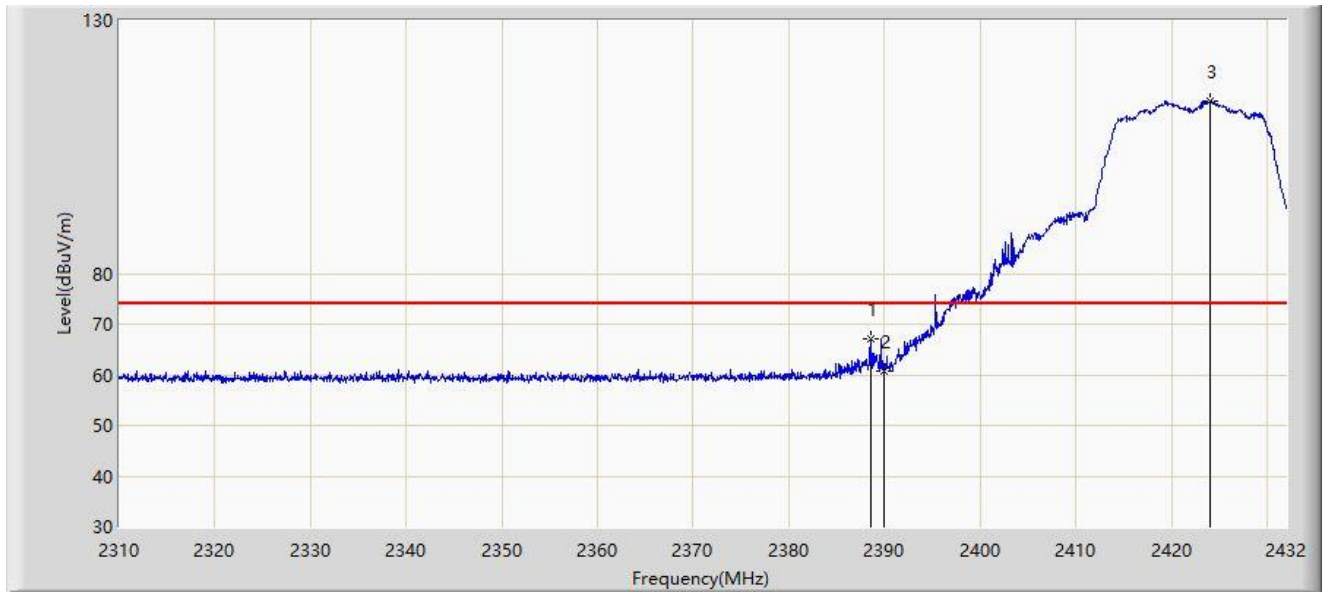


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.568	67.031	35.024	-6.969	74.000	32.007	PK
2			2390.000	60.703	28.700	-13.297	74.000	32.003	PK
3		*	2424.070	114.028	82.082	N/A	N/A	31.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz	

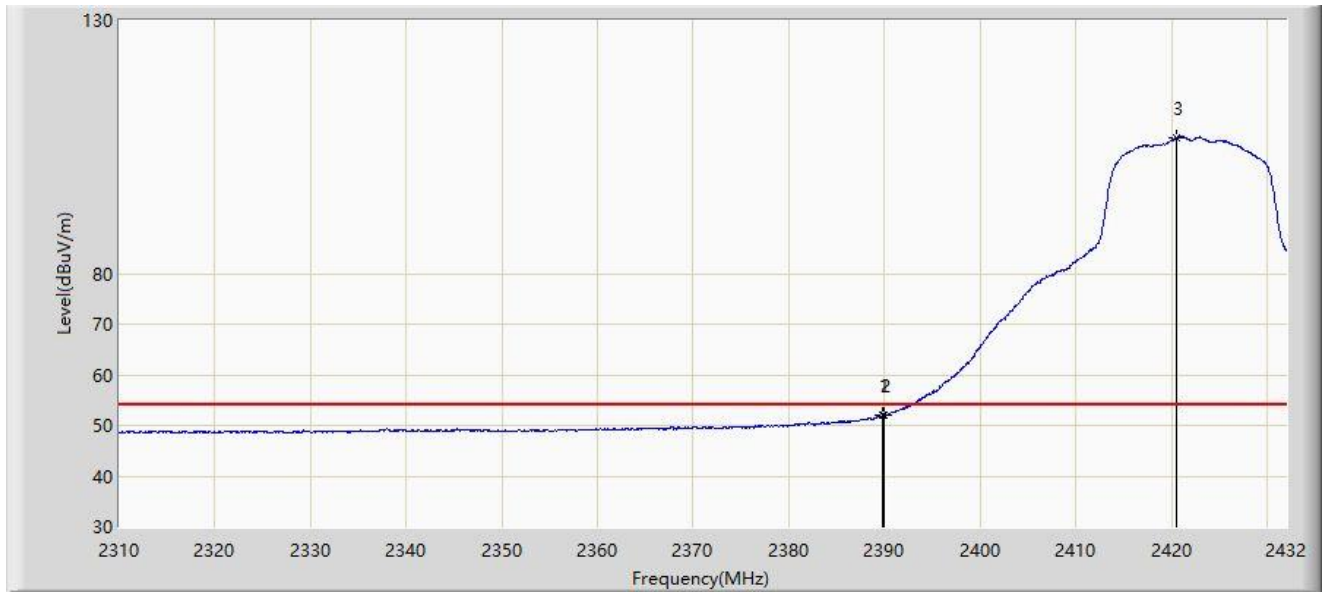


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.849	52.132	20.128	-1.868	54.000	32.004	AV
2			2390.000	52.091	20.088	-1.909	54.000	32.003	AV
3		*	2420.593	106.869	74.920	N/A	N/A	31.949	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz	

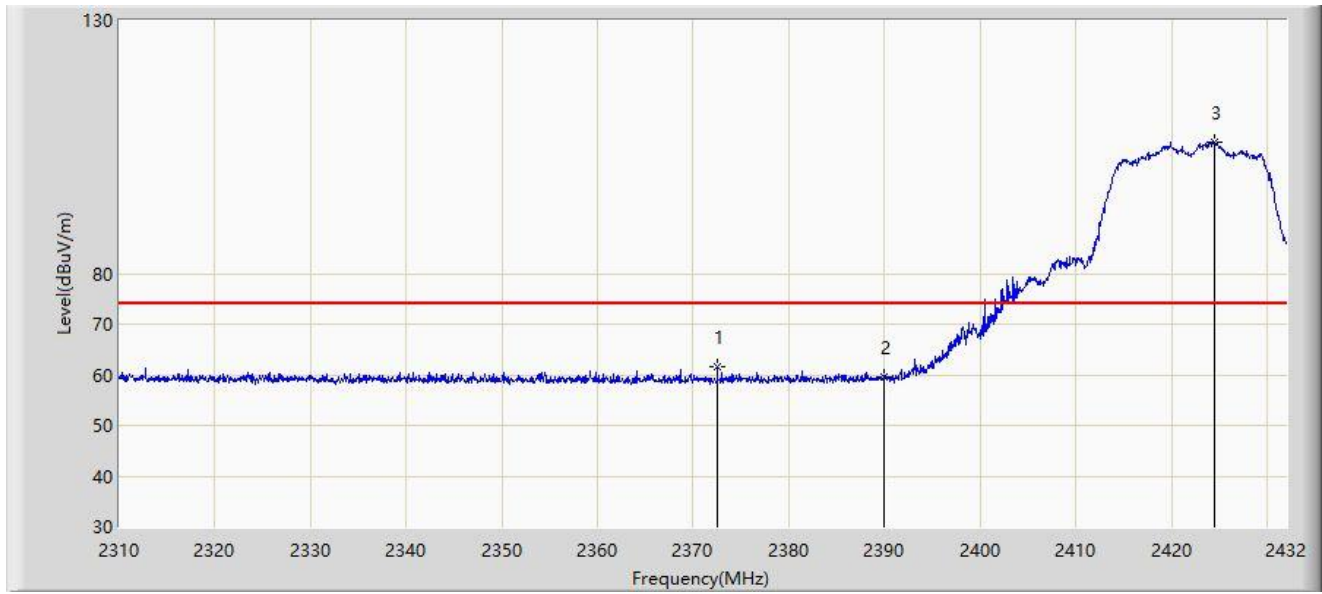


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2372.525	61.606	29.593	-12.394	74.000	32.013	PK
2			2390.000	59.640	27.637	-14.360	74.000	32.003	PK
3		*	2424.497	105.959	74.013	N/A	N/A	31.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz	

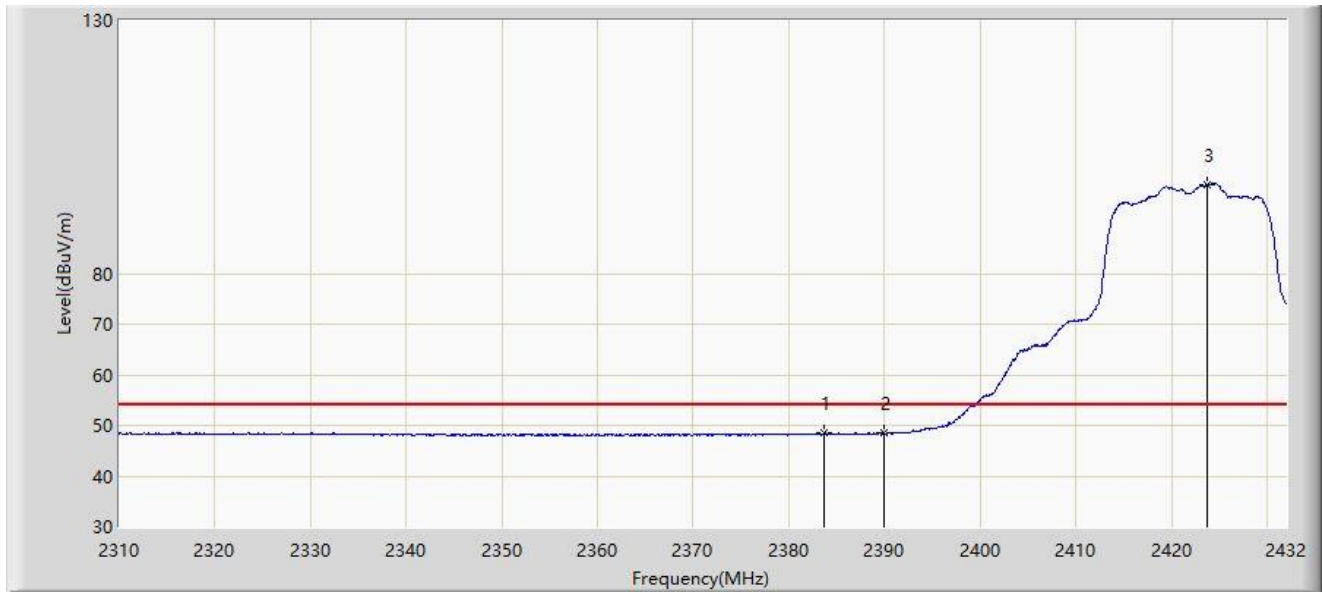


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2383.627	48.495	16.478	-5.505	54.000	32.018	AV
2			2390.000	48.445	16.442	-5.555	54.000	32.003	AV
3		*	2423.765	97.557	65.610	N/A	N/A	31.946	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz	

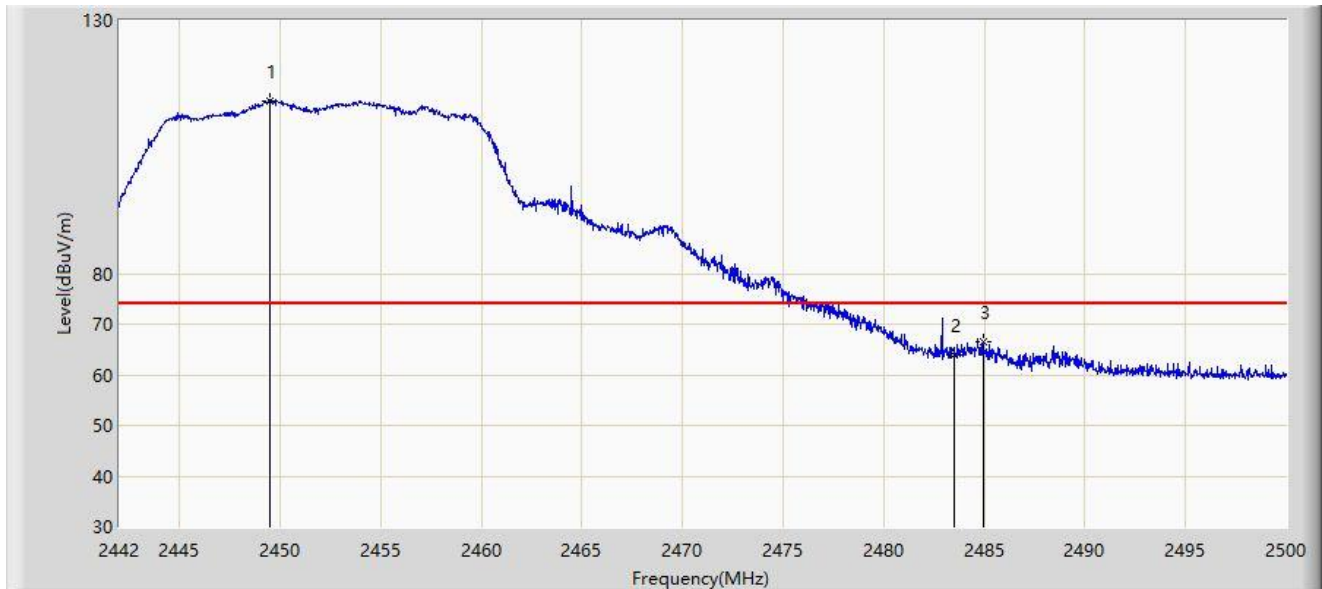


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2449.482	114.086	82.153	N/A	N/A	31.933	PK
2			2483.500	63.773	31.861	-10.227	74.000	31.912	PK
3			2484.920	66.605	34.696	-7.395	74.000	31.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz	

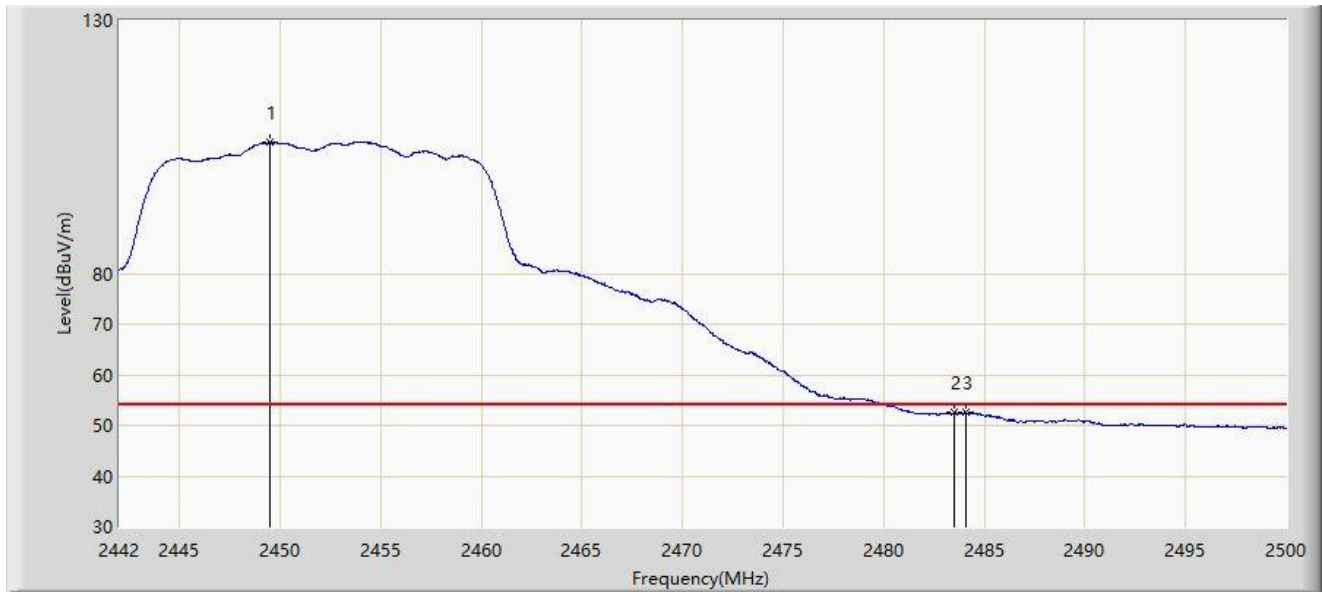


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2449.453	105.932	73.999	N/A	N/A	31.932	AV
2			2483.500	52.482	20.570	-1.518	54.000	31.912	AV
3			2484.050	52.671	20.760	-1.329	54.000	31.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz	

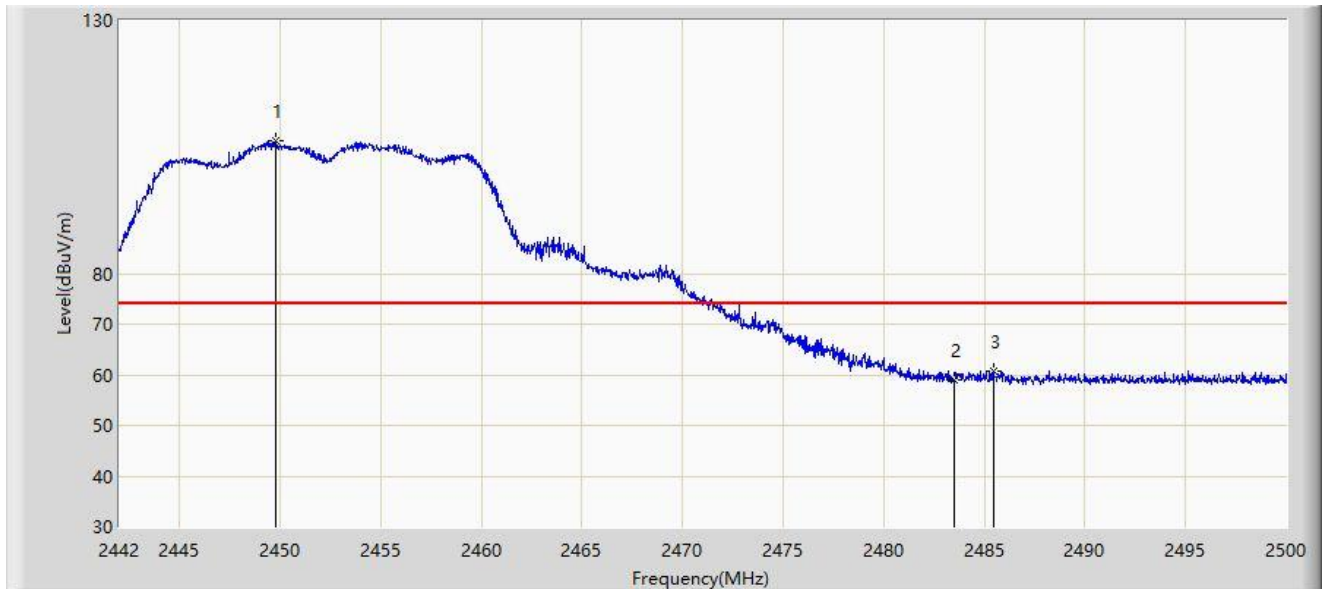


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2449.801	106.087	74.154	N/A	N/A	31.933	PK
2			2483.500	58.891	26.979	-15.109	74.000	31.912	PK
3			2485.442	60.701	28.793	-13.299	74.000	31.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 21:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz	

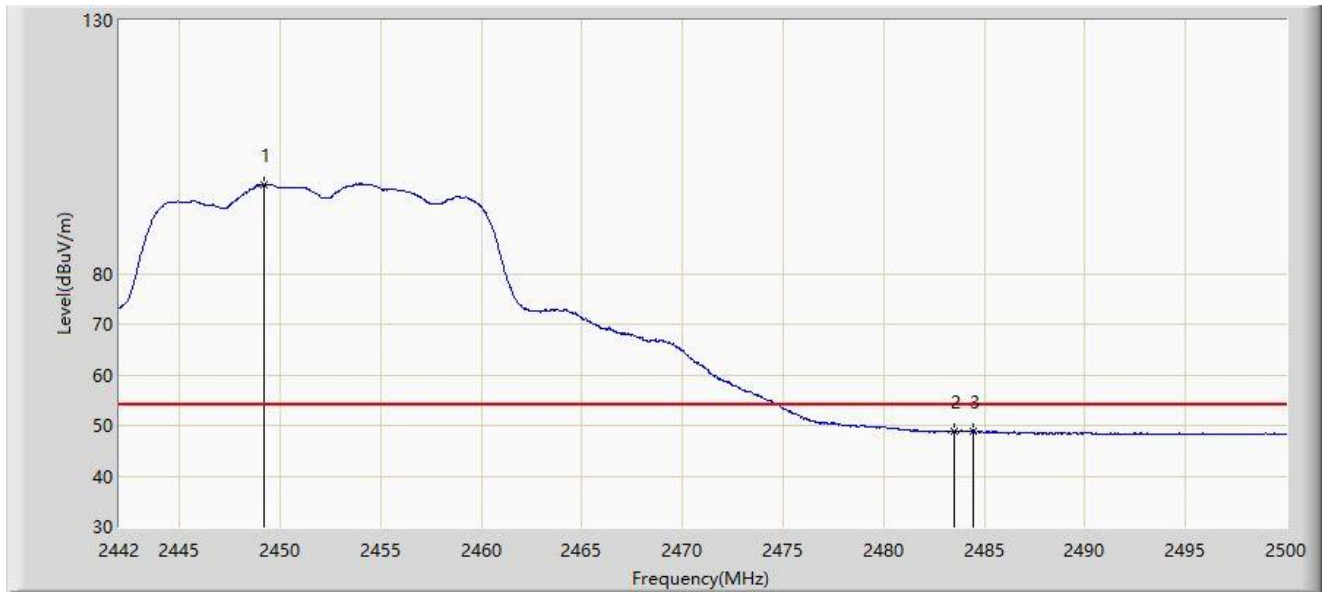


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2449.163	97.571	65.638	N/A	N/A	31.933	AV
2			2483.500	48.716	16.804	-5.284	54.000	31.912	AV
3			2484.456	48.836	16.926	-5.164	54.000	31.910	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	

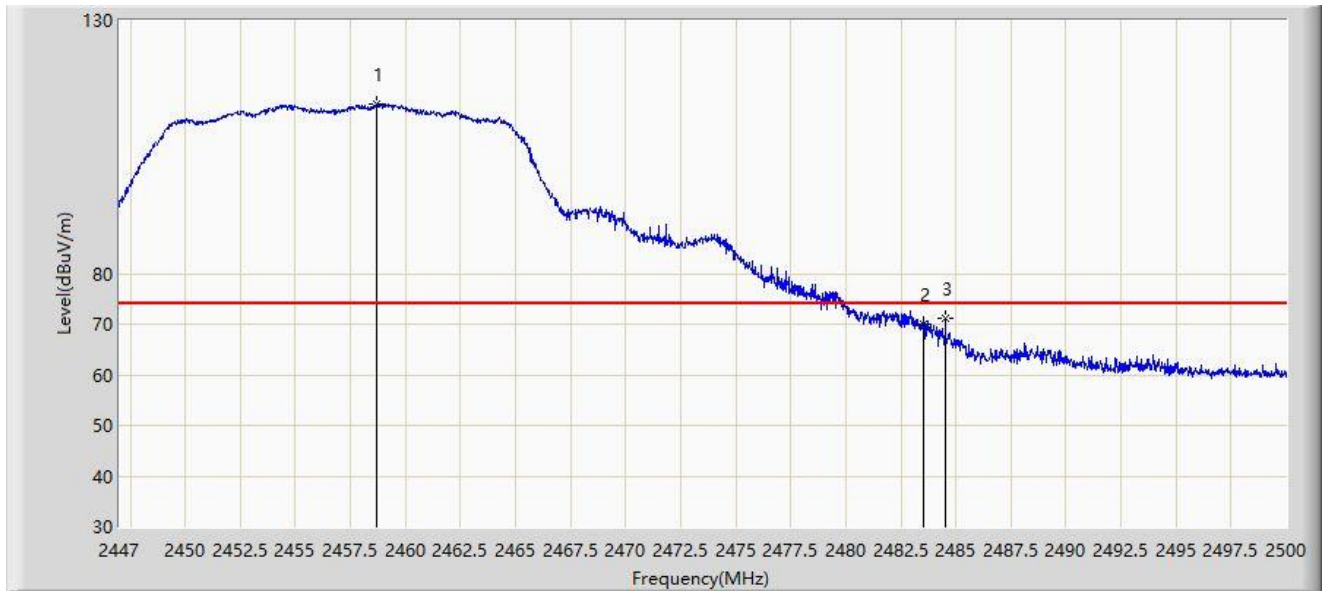


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2458.687	113.392	81.463	N/A	N/A	31.930	PK
2			2483.500	69.927	38.015	-4.073	74.000	31.912	PK
3			2484.524	71.226	39.316	-2.774	74.000	31.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	

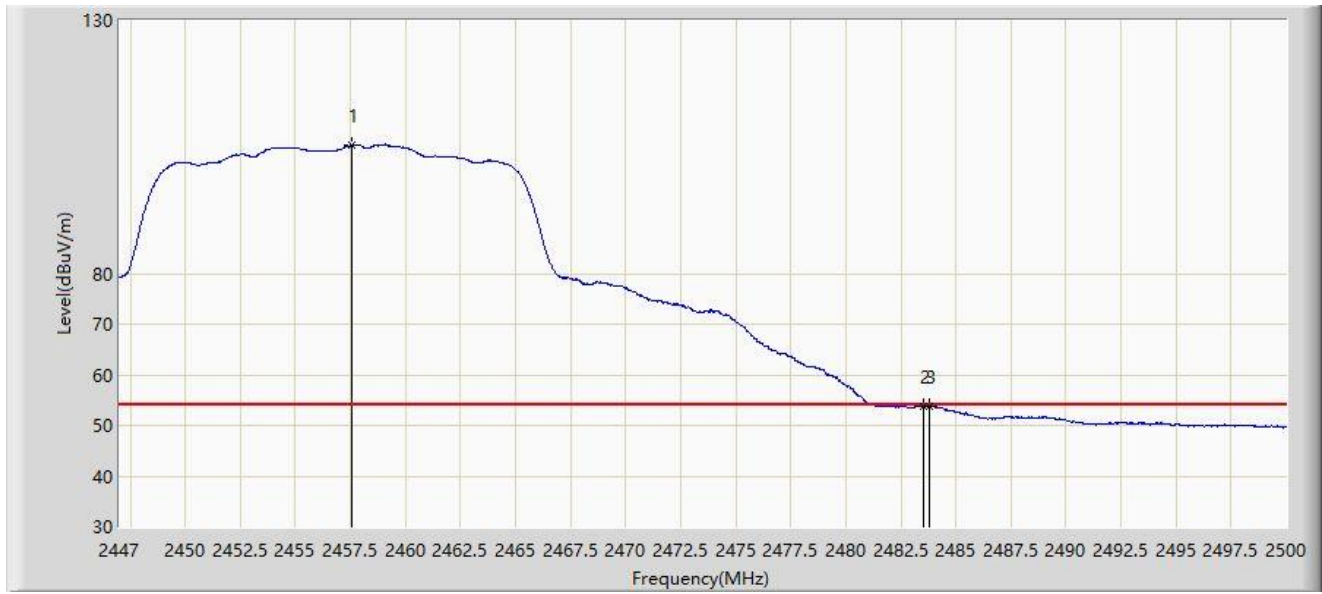


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2457.573	105.320	73.390	N/A	N/A	31.931	AV
2			2483.500	53.771	21.859	-0.229	54.000	31.912	AV
3			2483.809	53.896	21.985	-0.104	54.000	31.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	

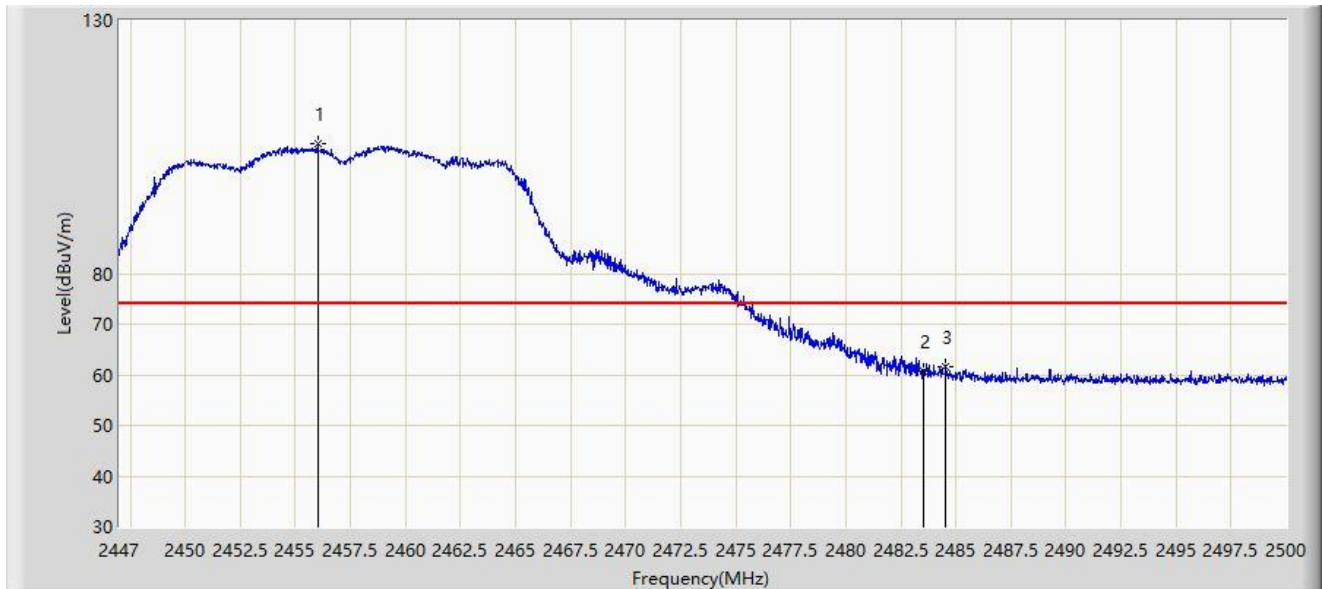

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2456.010	105.562	73.630	N/A	N/A	31.932	PK
2			2483.500	60.661	28.749	-13.339	74.000	31.912	PK
3			2484.551	61.554	29.644	-12.446	74.000	31.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2455.930	96.926	64.994	N/A	N/A	31.932	AV
2			2483.500	49.206	17.294	-4.794	54.000	31.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

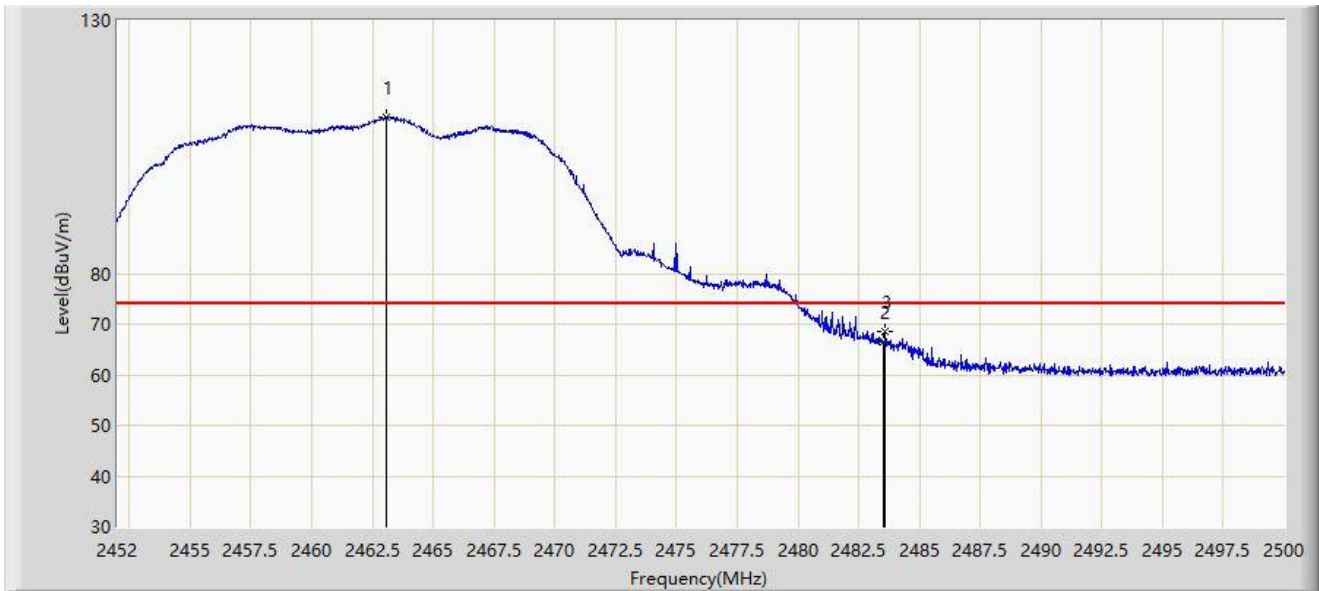


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2463.040	110.973	80.121	N/A	N/A	30.852	PK
2			2483.500	66.565	35.677	-7.435	74.000	30.888	PK
3			2483.608	68.437	37.549	-5.563	74.000	30.888	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

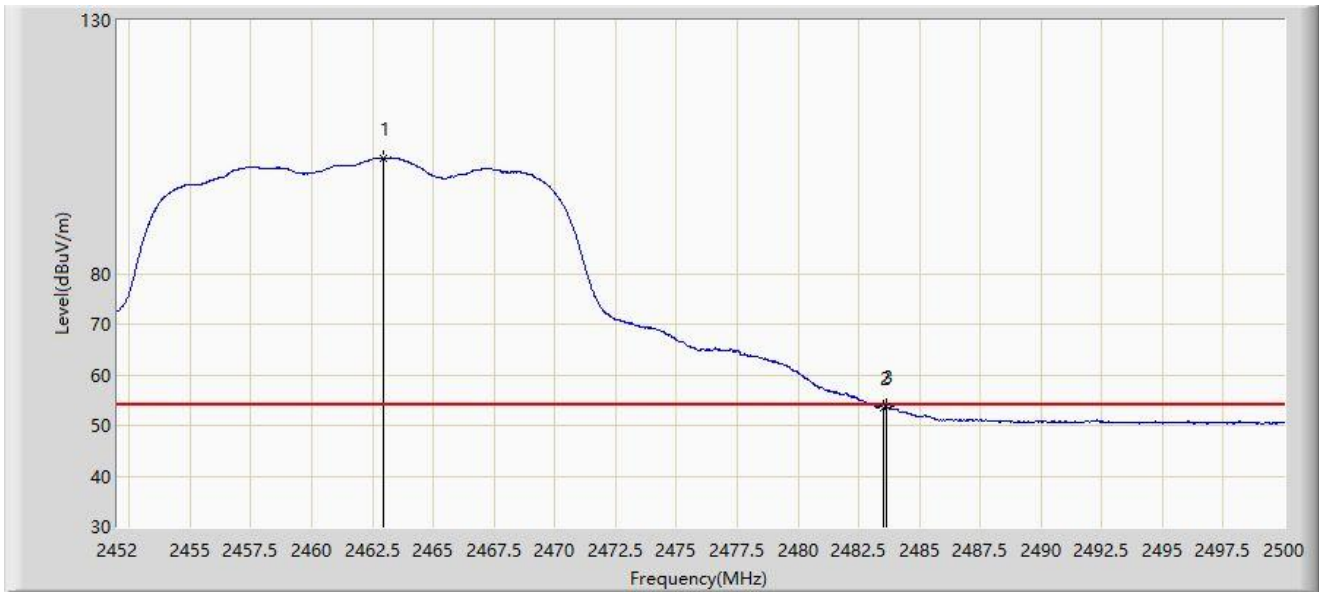


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2462.968	102.848	71.996	N/A	N/A	30.852	AV
2			2483.500	53.615	22.727	-0.385	54.000	30.888	AV
3			2483.656	53.656	22.768	-0.344	54.000	30.888	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

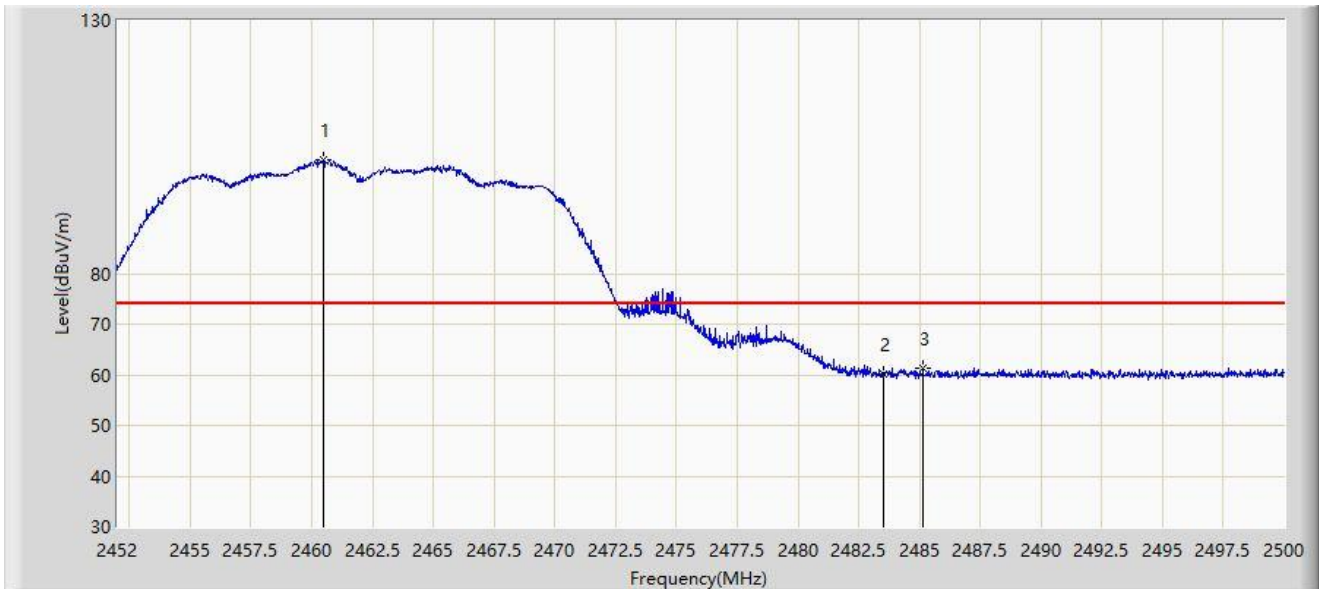

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2460.472	102.337	71.487	N/A	N/A	30.850	PK
2			2483.500	60.010	29.122	-13.990	74.000	30.888	PK
3			2485.144	61.387	30.500	-12.613	74.000	30.887	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2460.400	94.159	63.309	N/A	N/A	30.850	AV
2			2483.500	49.361	18.473	-4.639	54.000	30.888	AV
3			2485.408	49.144	18.257	-4.856	54.000	30.887	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

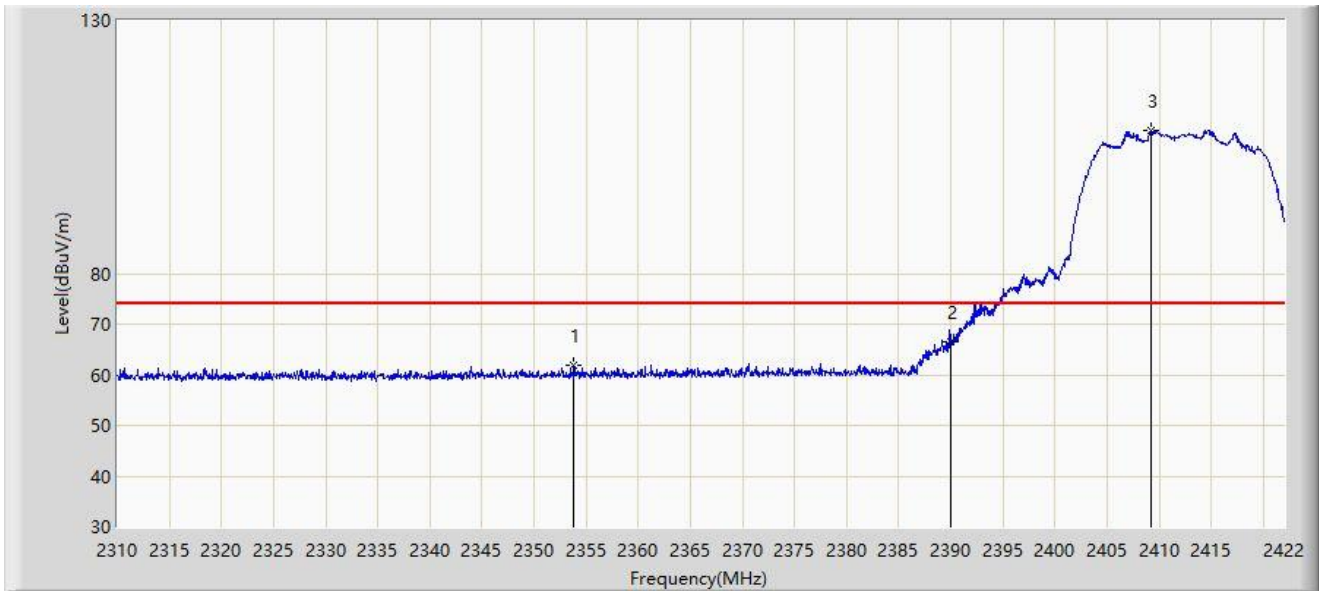


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2353.792	61.926	30.935	-12.074	74.000	30.992	PK
2			2390.000	66.465	35.559	-7.535	74.000	30.906	PK
3		*	2409.288	108.243	77.347	N/A	N/A	30.896	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

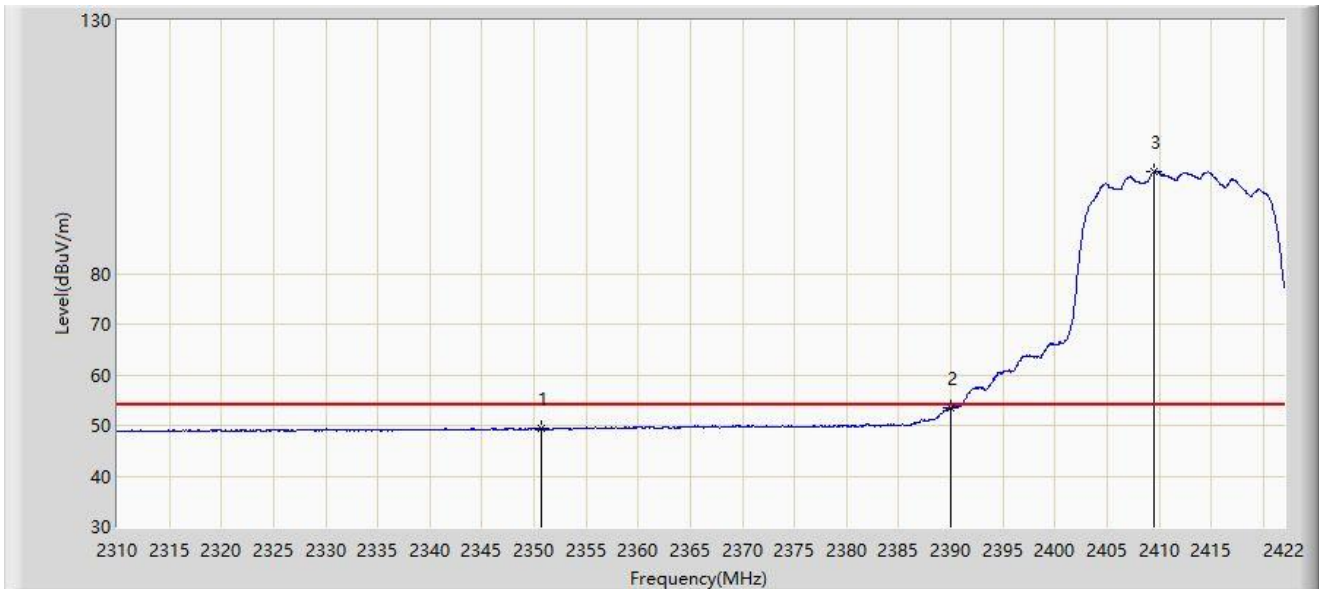


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2350.712	49.450	18.451	-4.550	54.000	30.999	AV
2			2390.000	53.391	22.485	-0.609	54.000	30.906	AV
3		*	2409.512	100.154	69.258	N/A	N/A	30.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

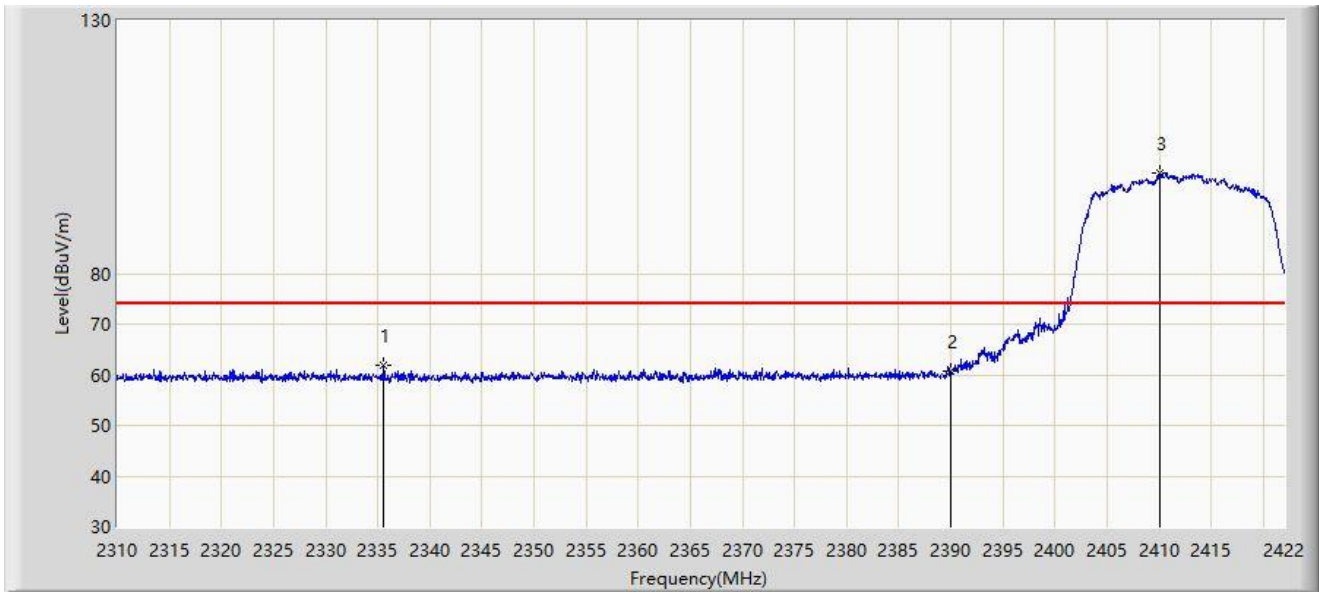


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2335.592	61.928	30.886	-12.072	74.000	31.042	PK
2			2390.000	60.632	29.726	-13.368	74.000	30.906	PK
3		*	2410.072	99.754	68.858	N/A	N/A	30.896	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

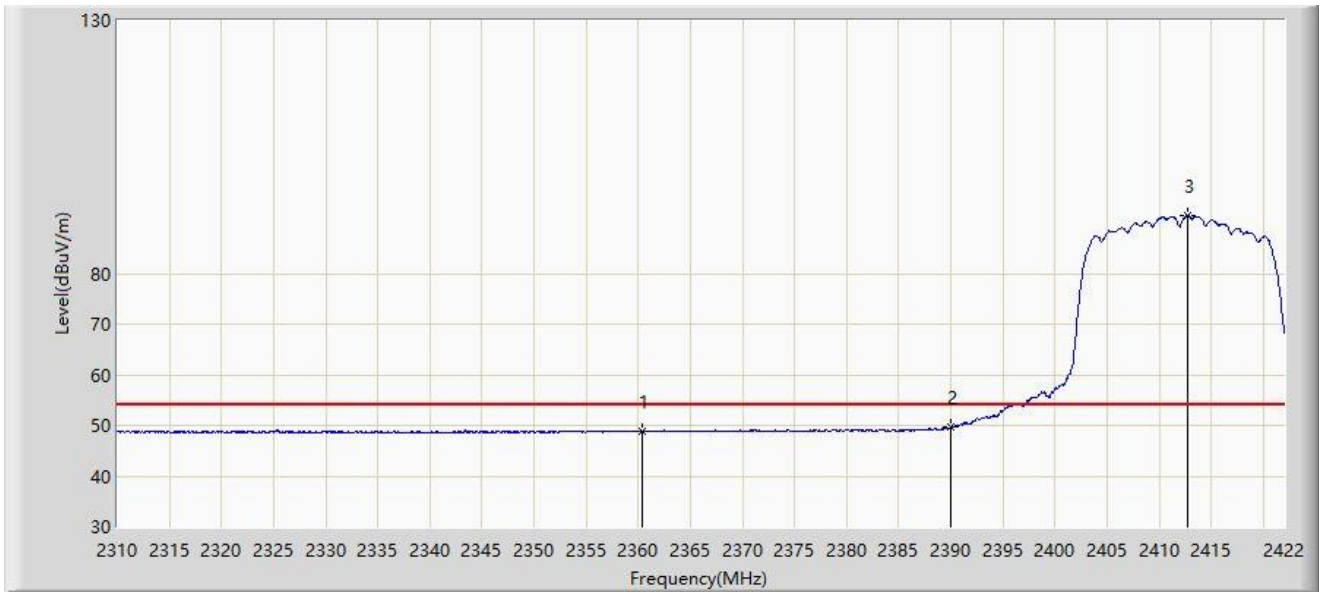


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2360.456	48.947	17.972	-5.053	54.000	30.975	AV
2			2390.000	49.605	18.699	-4.395	54.000	30.906	AV
3		*	2412.704	91.426	60.533	N/A	N/A	30.892	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

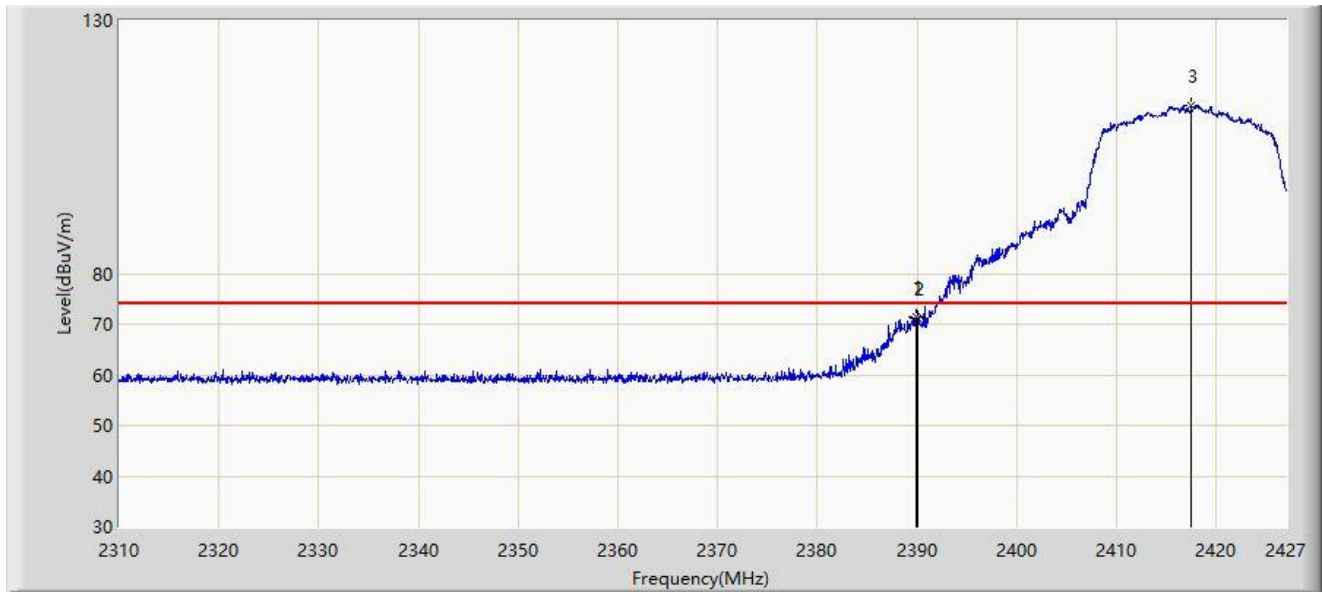


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.969	71.361	39.358	-2.639	74.000	32.003	PK
2			2390.000	71.273	39.270	-2.727	74.000	32.003	PK
3		*	2417.465	113.273	81.318	N/A	N/A	31.955	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

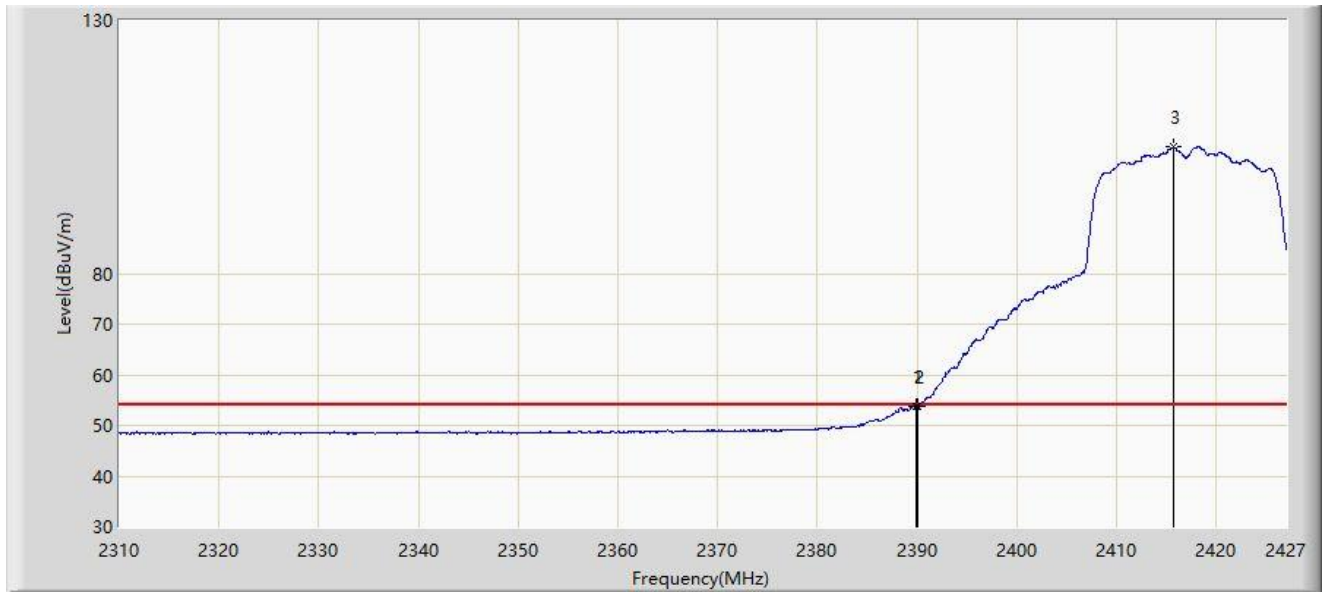


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.969	53.851	21.848	-0.149	54.000	32.003	AV
2			2390.000	53.824	21.821	-0.176	54.000	32.003	AV
3		*	2415.768	105.030	73.072	N/A	N/A	31.958	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

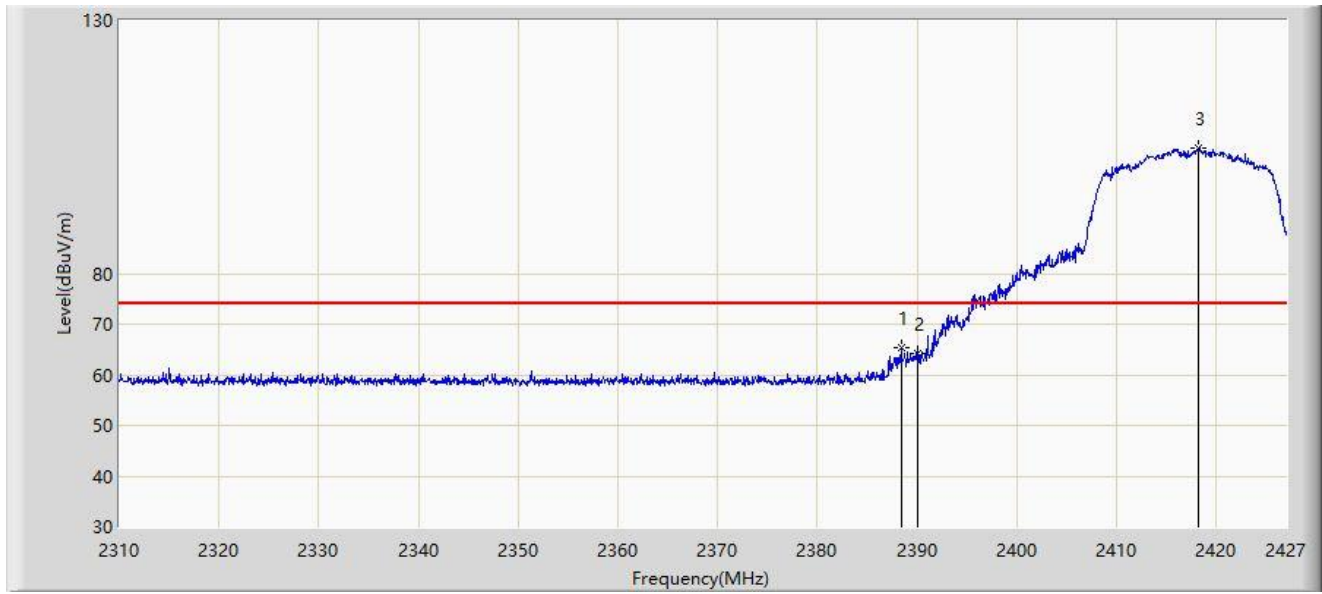


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.390	65.265	33.258	-8.735	74.000	32.008	PK
2			2390.000	64.299	32.296	-9.701	74.000	32.003	PK
3		*	2418.225	104.729	72.776	N/A	N/A	31.954	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

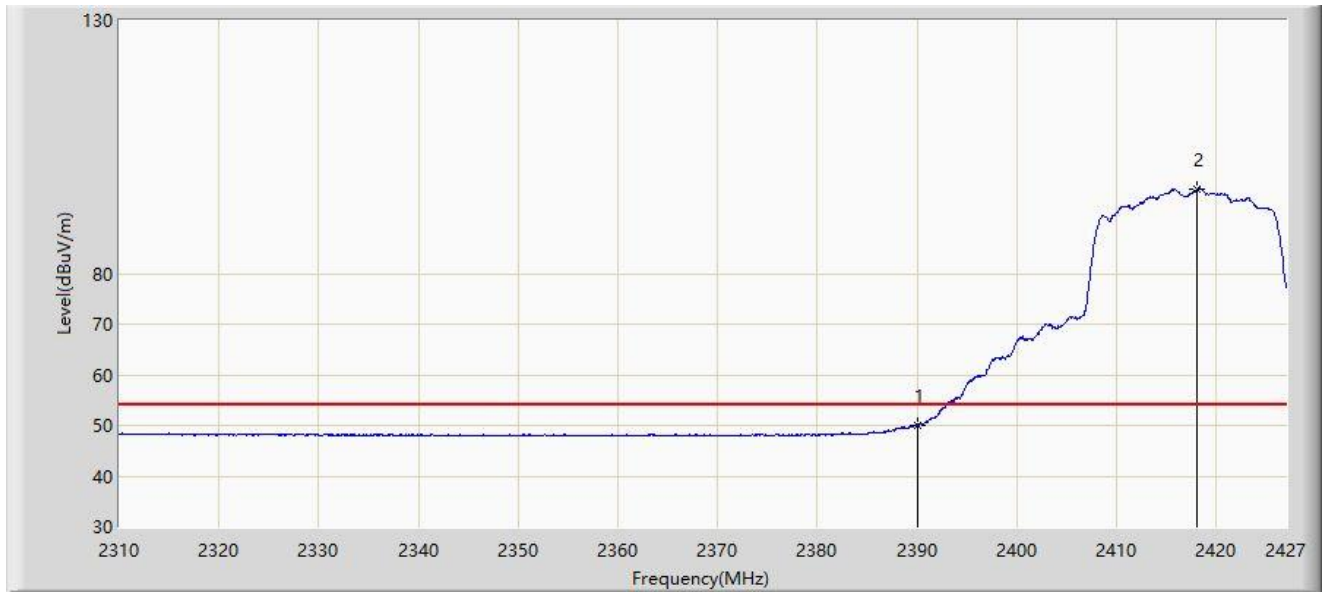


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	50.144	18.141	-3.856	54.000	32.003	AV
2		*	2418.050	96.693	64.739	N/A	N/A	31.954	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz	

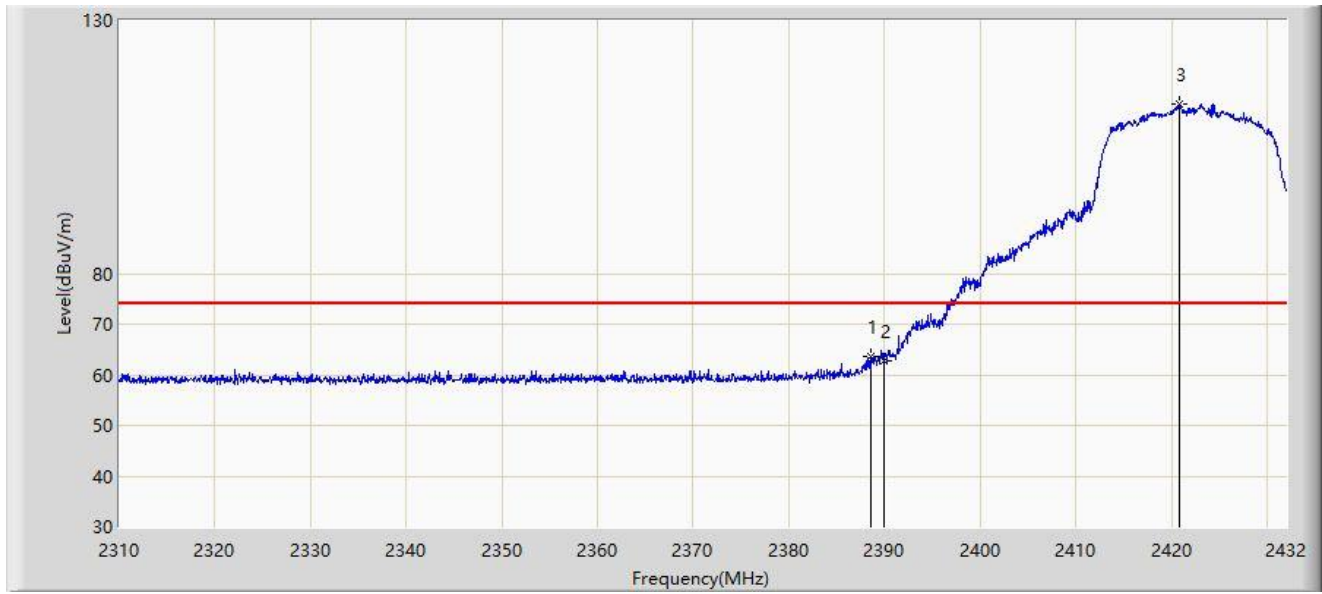


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.629	63.739	31.732	-10.261	74.000	32.007	PK
2			2390.000	62.639	30.636	-11.361	74.000	32.003	PK
3		*	2420.898	113.531	81.582	N/A	N/A	31.949	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz	

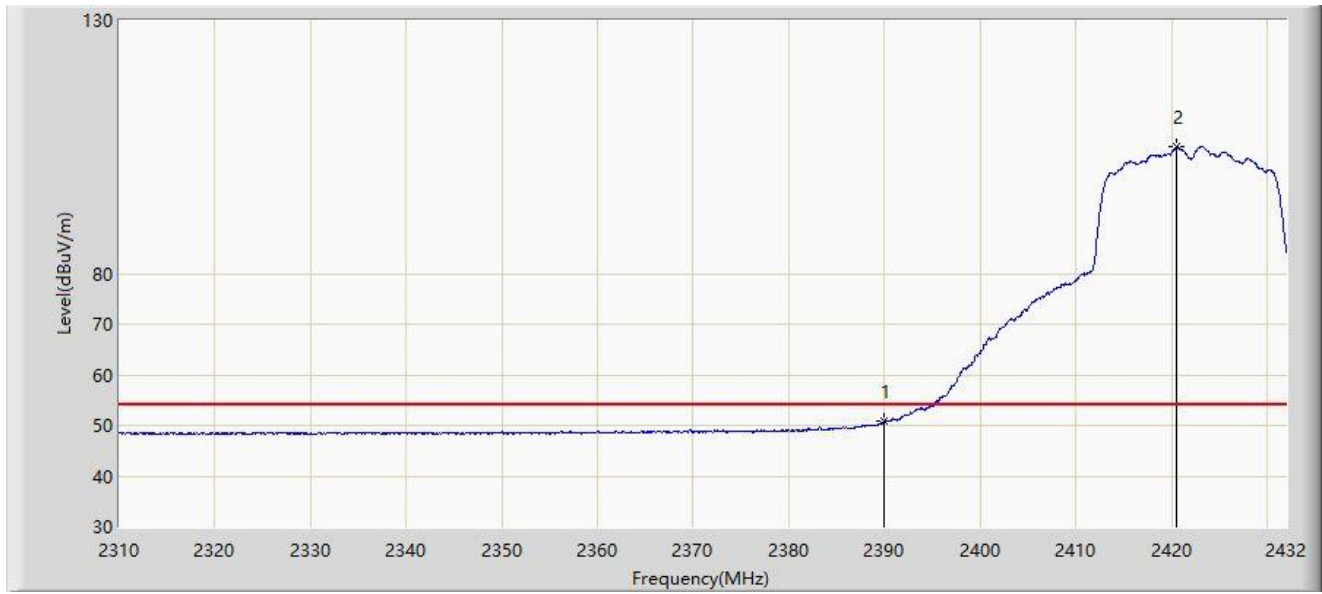


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	50.761	18.758	-3.239	54.000	32.003	AV
2		*	2420.532	105.053	73.103	N/A	N/A	31.949	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz	

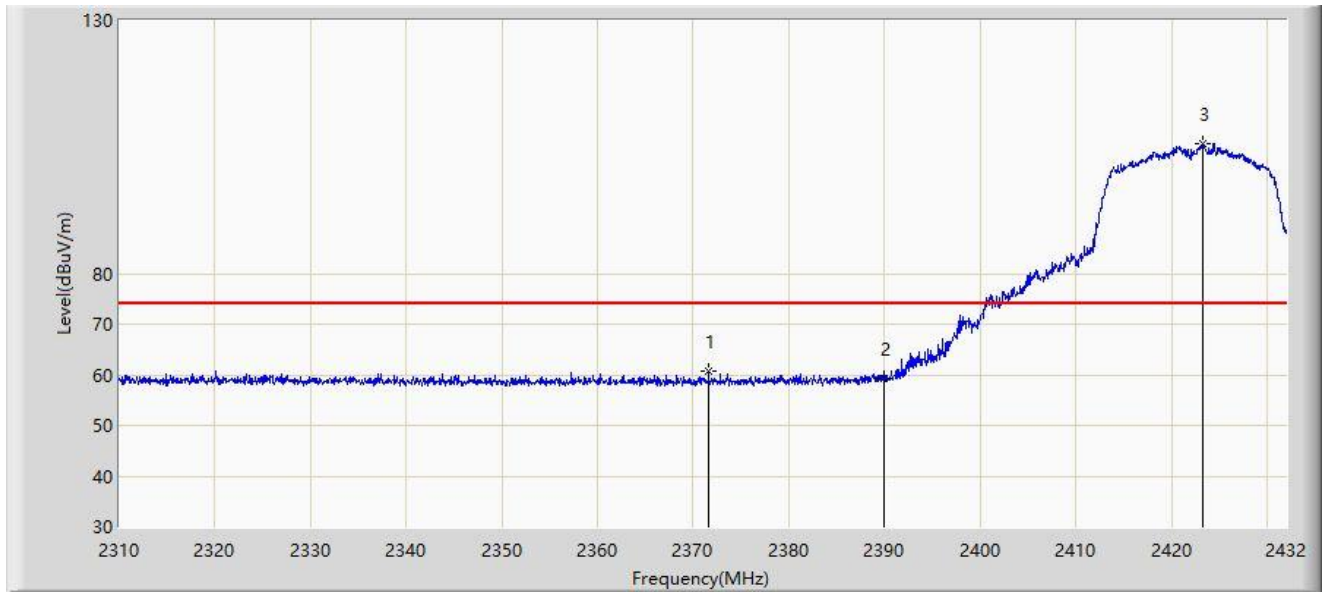


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2371.610	60.781	28.767	-13.219	74.000	32.013	PK
2			2390.000	59.186	27.183	-14.814	74.000	32.003	PK
3		*	2423.216	105.732	73.785	N/A	N/A	31.947	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz	

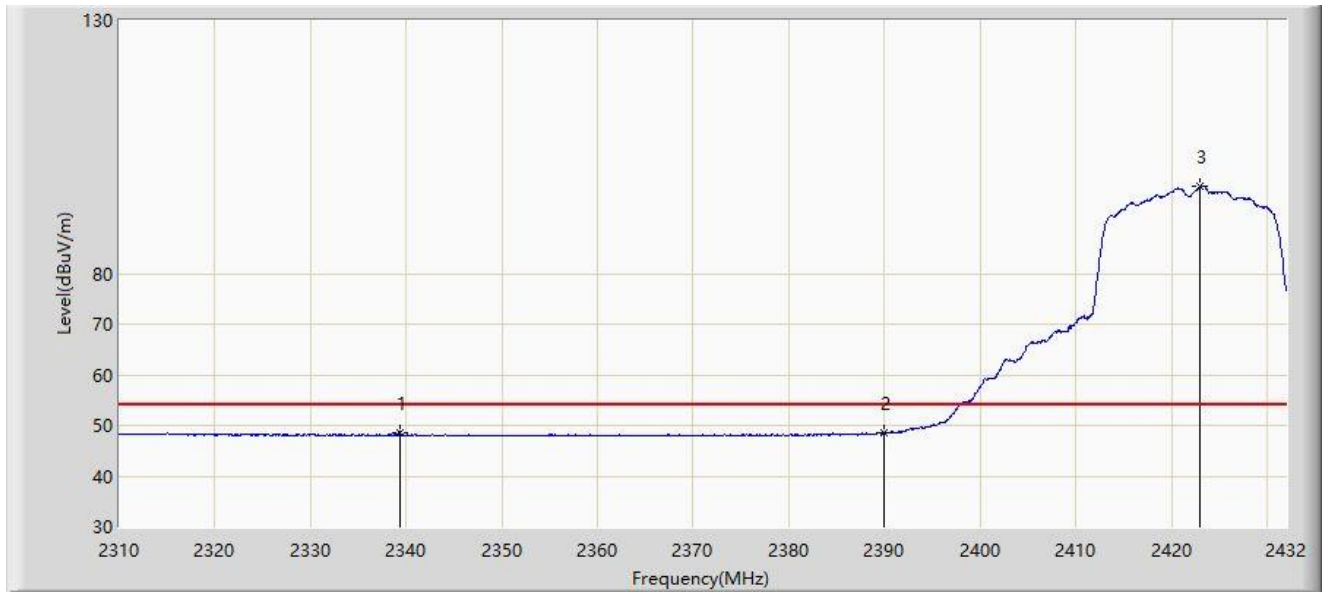

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2339.341	48.493	16.398	-5.507	54.000	32.096	AV
2			2390.000	48.442	16.439	-5.558	54.000	32.003	AV
3		*	2423.033	97.287	65.340	N/A	N/A	31.947	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2450.352	113.180	81.247	N/A	N/A	31.933	PK
2			2483.500	67.865	35.953	-6.135	74.000	31.912	PK
3			2483.702	69.813	37.902	-4.187	74.000	31.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz	

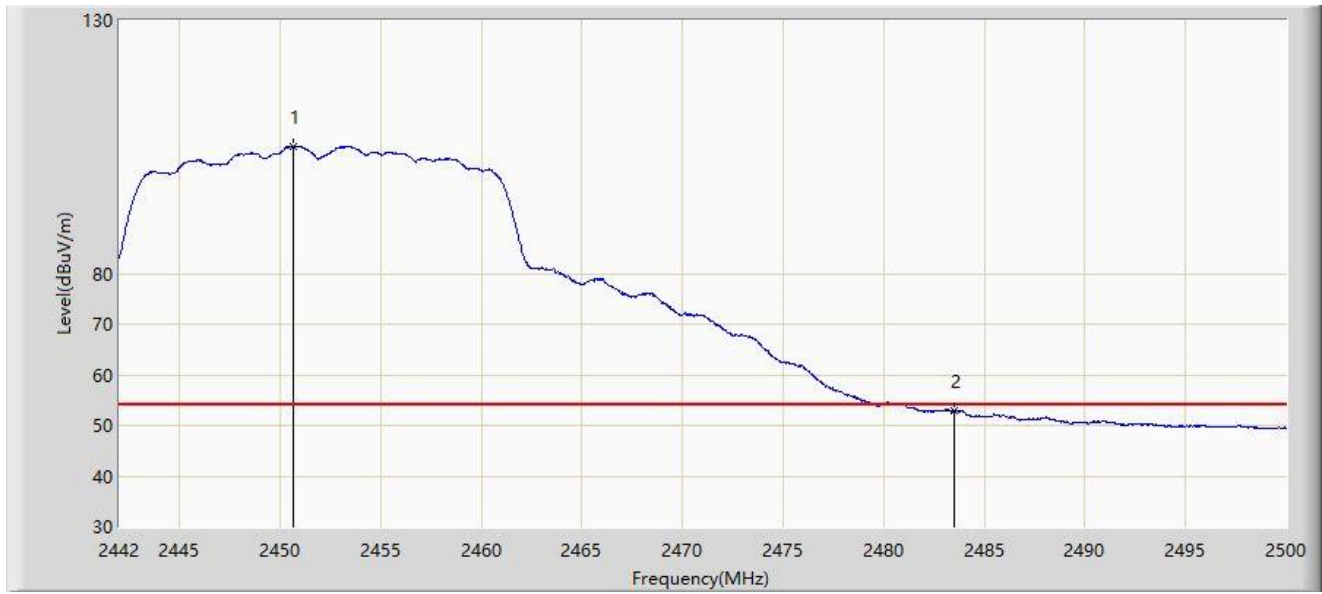


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2450.642	105.029	73.096	N/A	N/A	31.932	AV
2			2483.500	52.910	20.998	-1.090	54.000	31.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz	

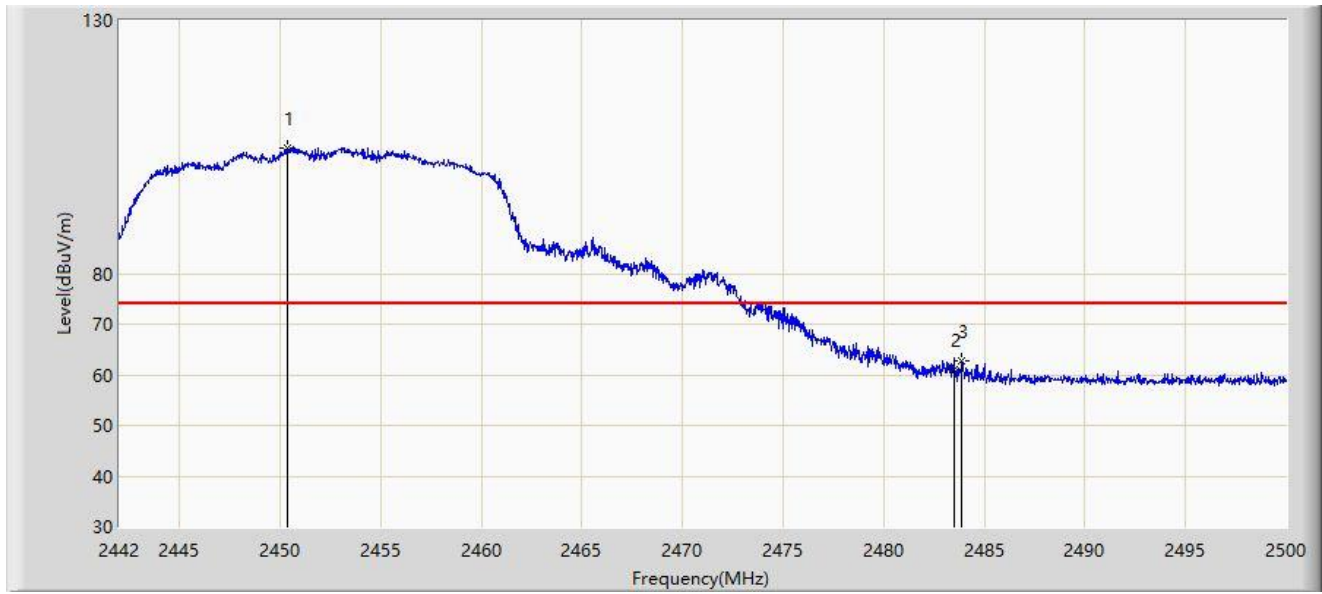


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2450.381	104.780	72.847	N/A	N/A	31.933	PK
2			2483.500	61.118	29.206	-12.882	74.000	31.912	PK
3			2483.876	62.671	30.760	-11.329	74.000	31.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz	

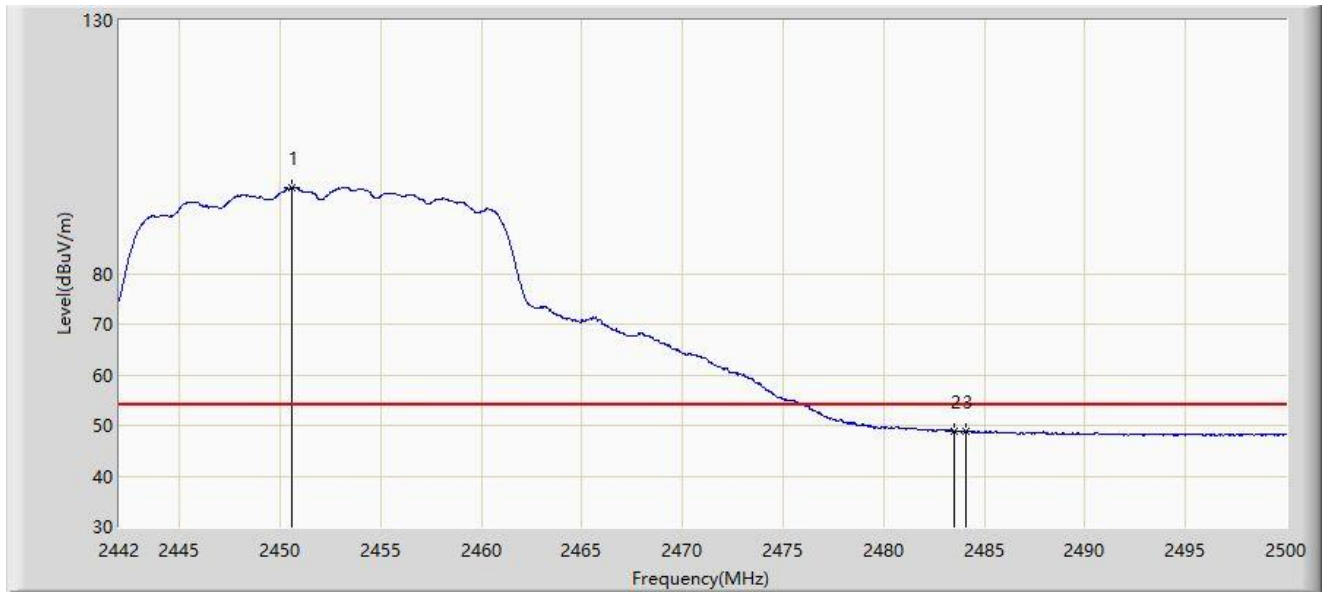


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2450.555	96.943	65.010	N/A	N/A	31.932	AV
2			2483.500	48.835	16.923	-5.165	54.000	31.912	AV
3			2484.108	48.964	17.053	-5.036	54.000	31.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

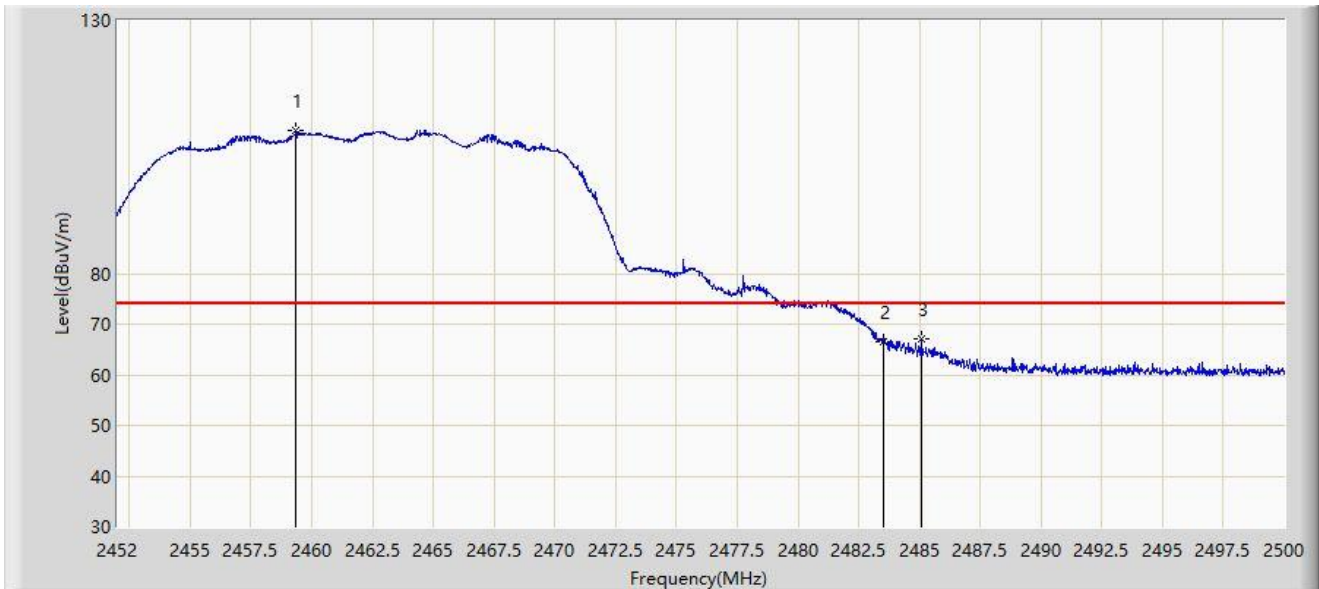


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2459.368	108.158	77.308	N/A	N/A	30.850	PK
2			2483.500	66.481	35.593	-7.519	74.000	30.888	PK
3			2485.072	67.048	36.161	-6.952	74.000	30.887	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

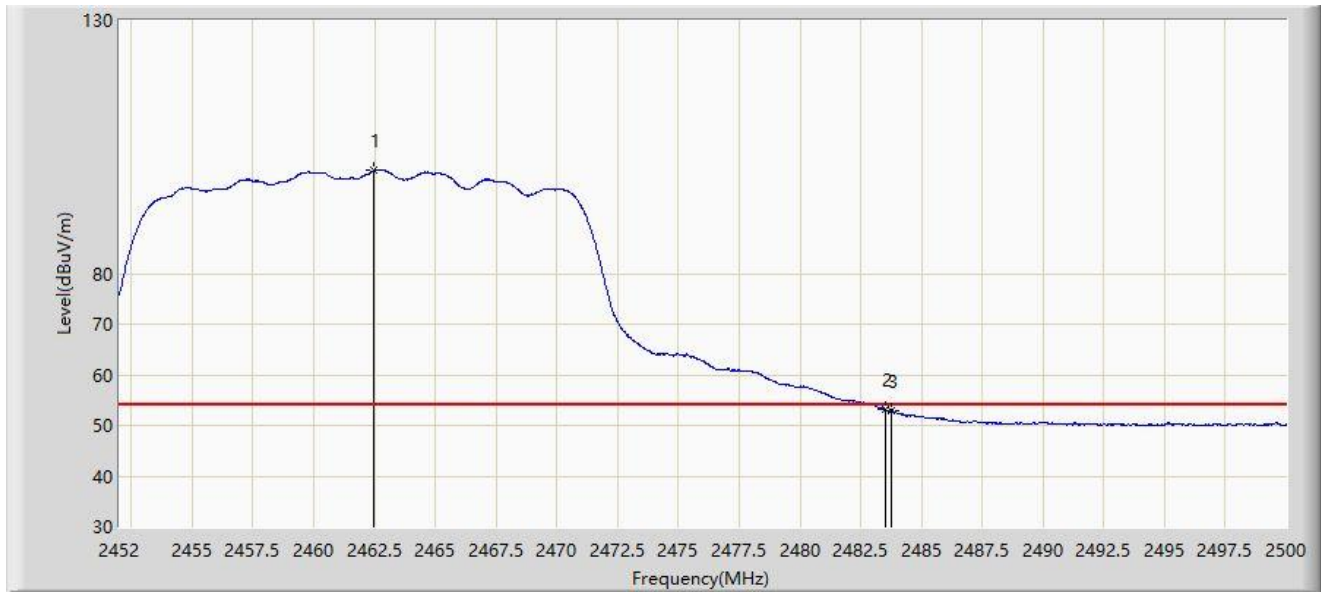


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.488	100.348	69.497	N/A	N/A	30.851	AV
2			2483.500	53.135	22.247	-0.865	54.000	30.888	AV
3			2483.776	52.832	21.944	-1.168	54.000	30.888	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

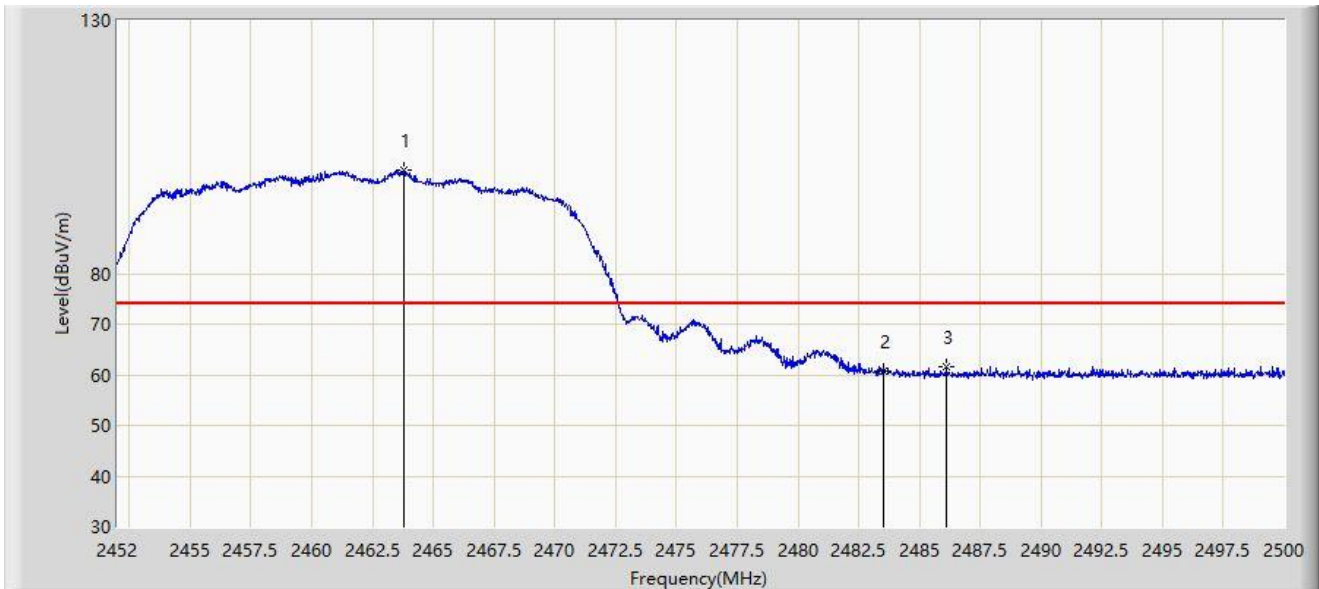


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2463.760	100.361	69.507	N/A	N/A	30.854	PK
2			2483.500	60.740	29.852	-13.260	74.000	30.888	PK
3			2486.128	61.548	30.662	-12.452	74.000	30.886	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 14:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

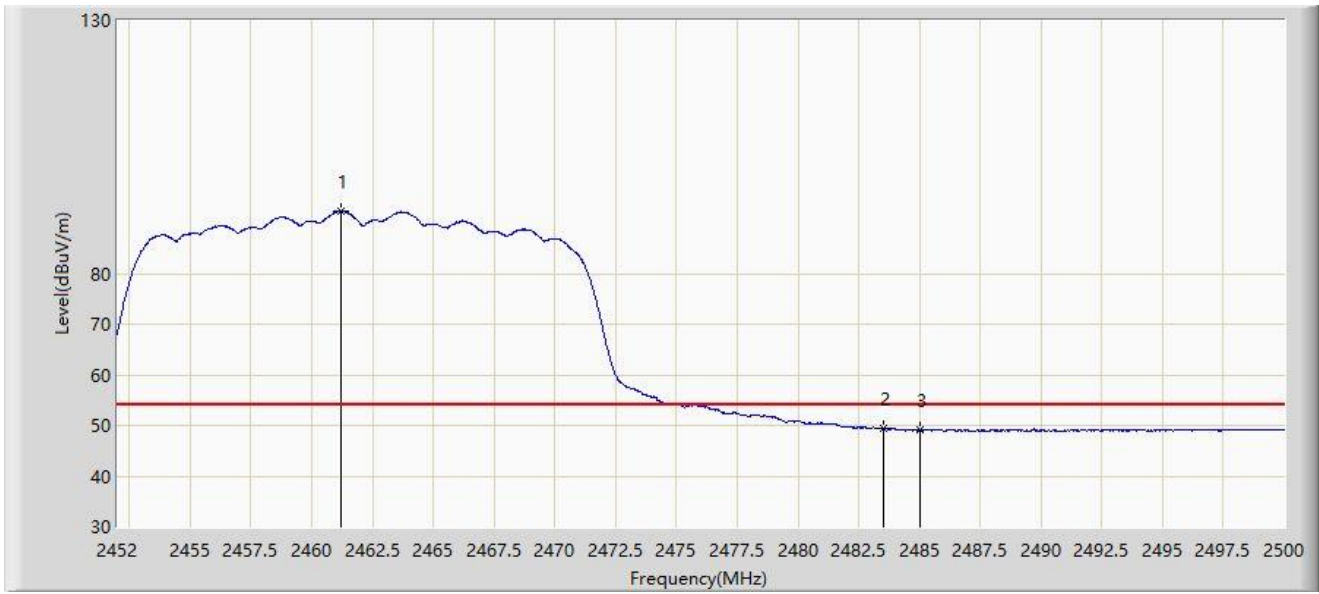


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2461.216	92.303	61.453	N/A	N/A	30.849	AV
2			2483.500	49.500	18.612	-4.500	54.000	30.888	AV
3			2485.024	49.116	18.229	-4.884	54.000	30.887	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

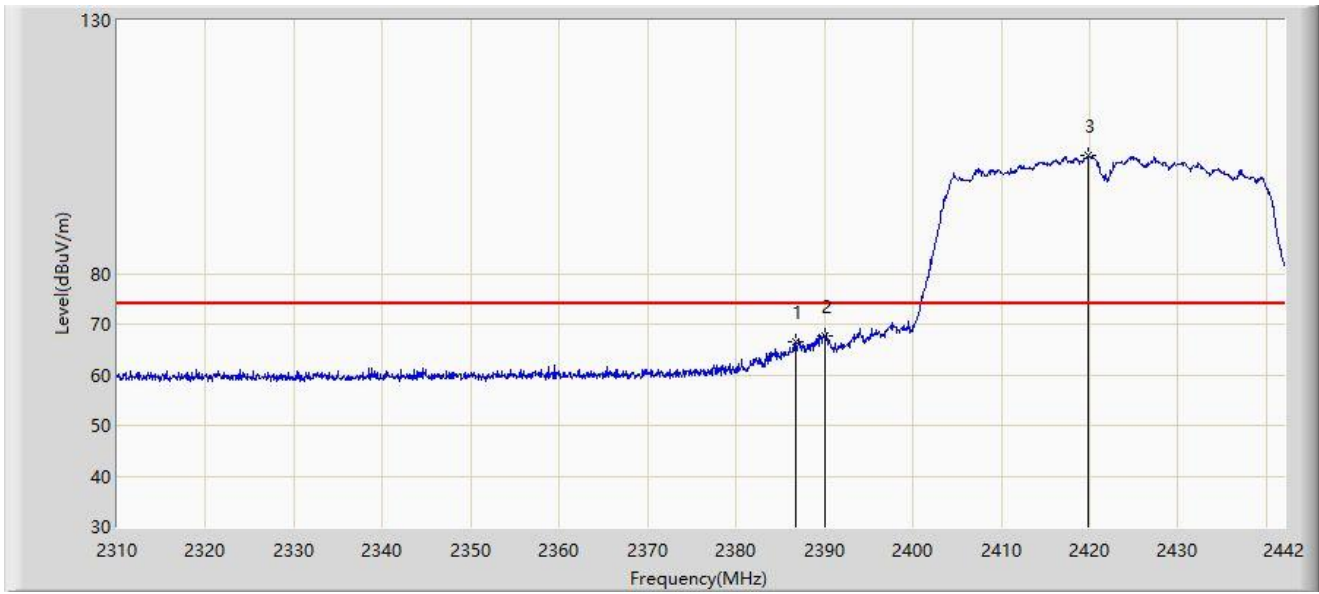


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2386.824	66.574	35.661	-7.426	74.000	30.913	PK
2			2390.000	67.550	36.644	-6.450	74.000	30.906	PK
3		*	2419.890	103.238	72.359	N/A	N/A	30.879	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

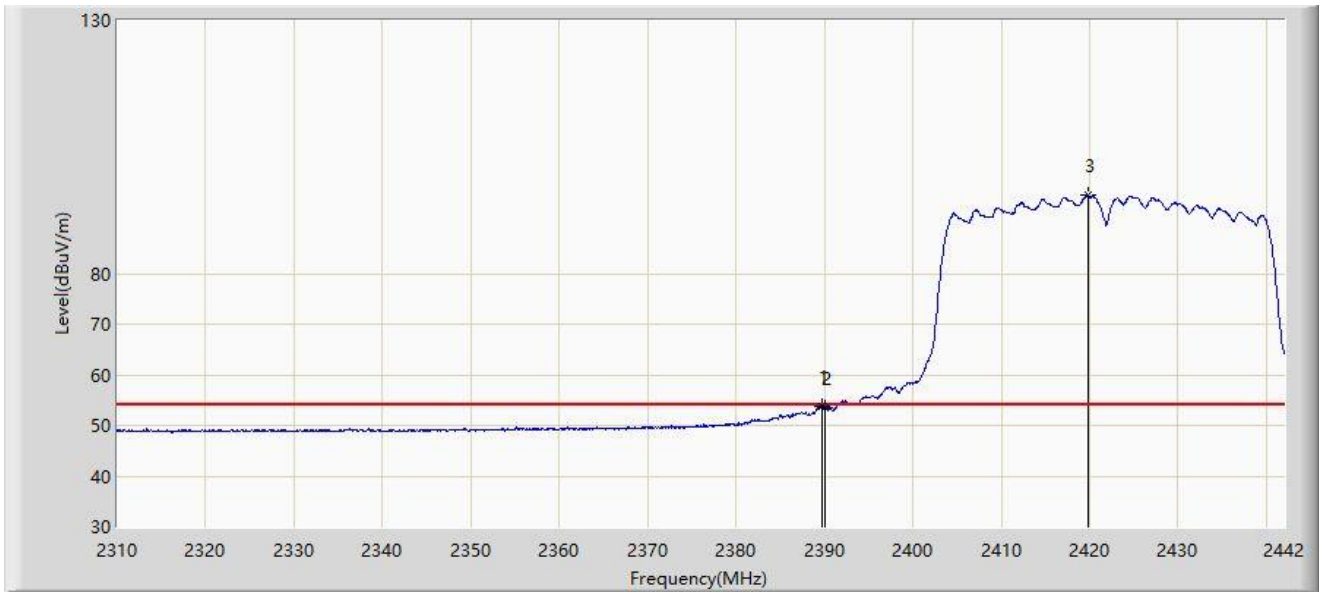


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.662	53.902	22.995	-0.098	54.000	30.907	AV
2			2390.000	53.619	22.713	-0.381	54.000	30.906	AV
3		*	2419.758	95.441	64.561	N/A	N/A	30.880	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

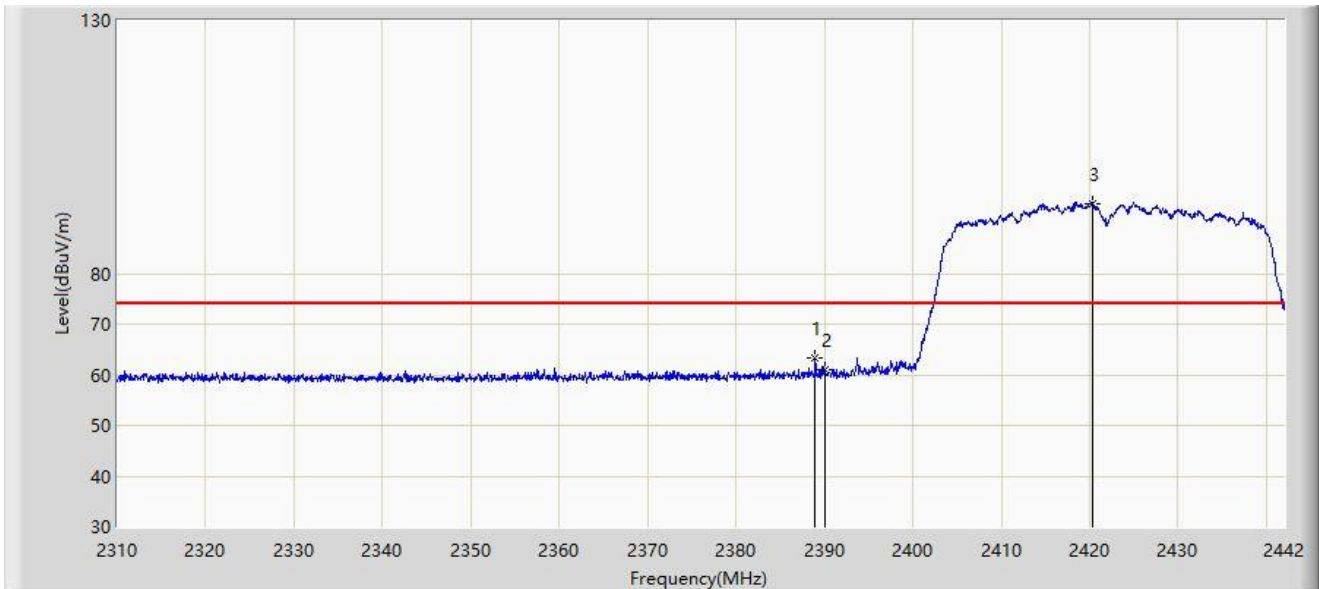


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2388.936	63.204	32.296	-10.796	74.000	30.908	PK
2			2390.000	60.931	30.025	-13.069	74.000	30.906	PK
3		*	2420.352	93.859	62.981	N/A	N/A	30.879	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

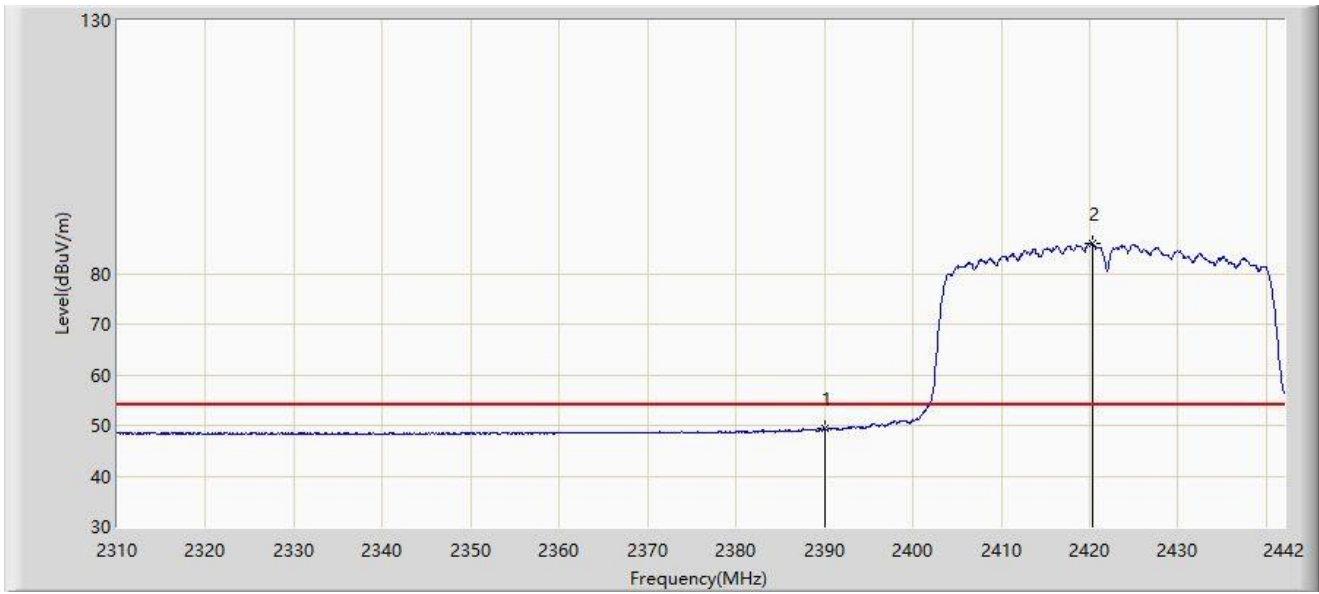


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	49.404	18.498	-4.596	54.000	30.906	AV
2		*	2420.352	85.848	54.970	N/A	N/A	30.879	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

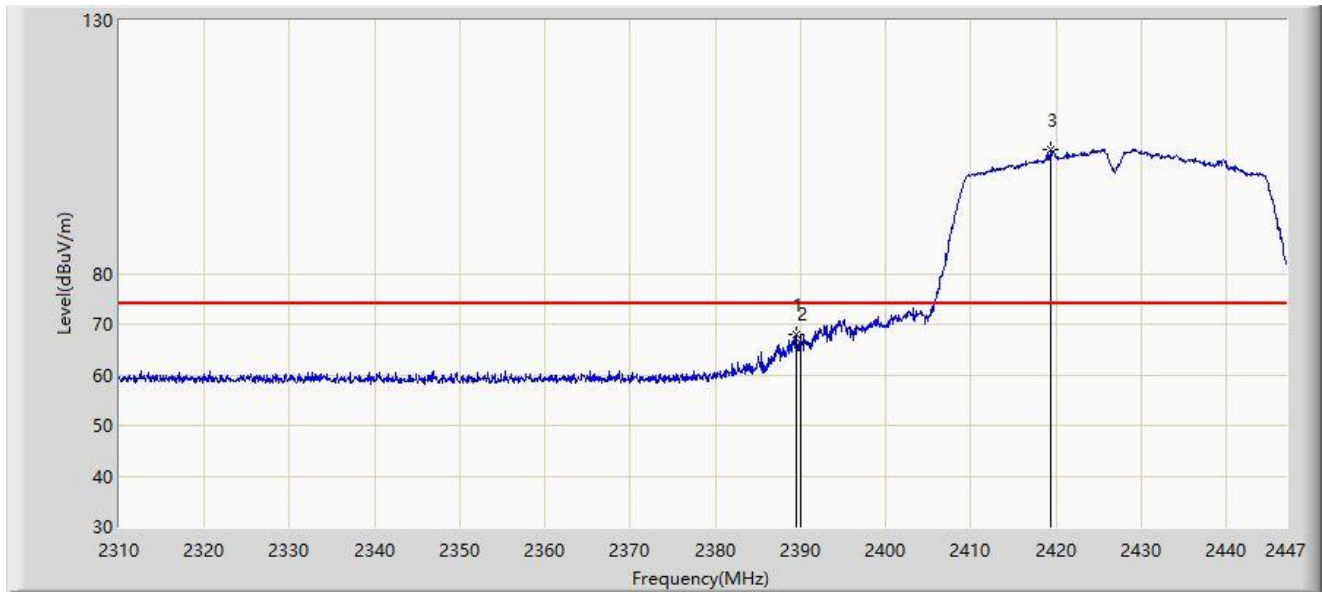


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.460	68.107	36.102	-5.893	74.000	32.005	PK
2			2390.000	66.129	34.126	-7.871	74.000	32.003	PK
3		*	2419.326	104.390	72.439	N/A	N/A	31.952	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MH	

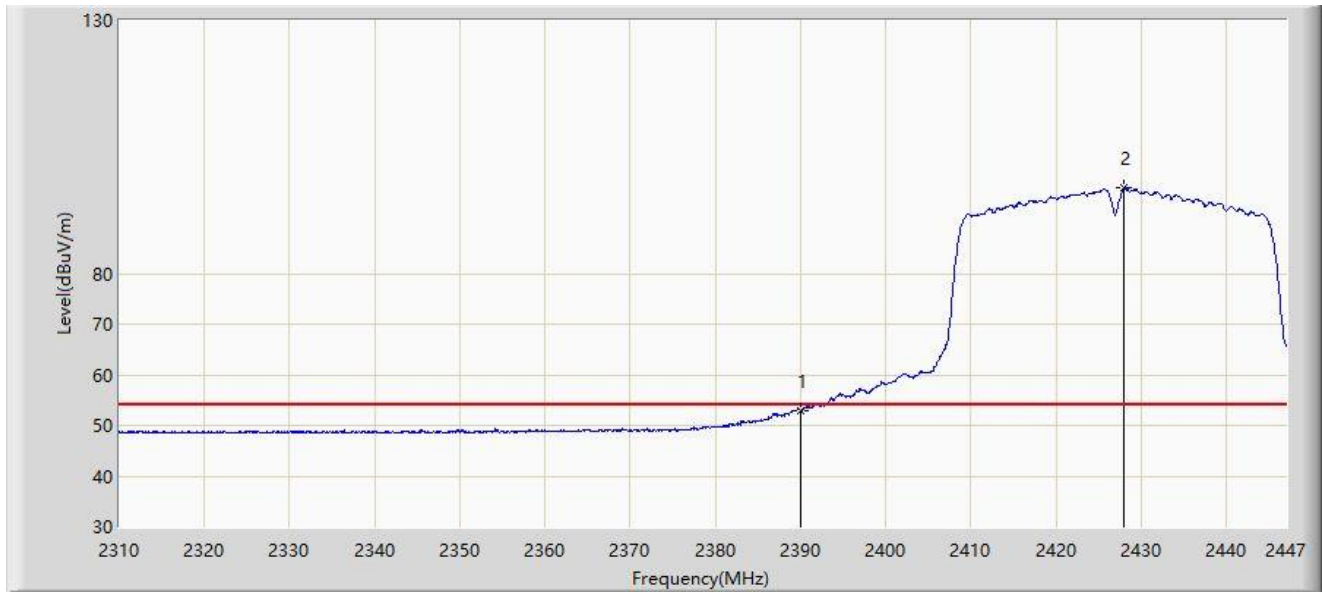


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	52.930	20.927	-1.070	54.000	32.003	AV
2		*	2428.025	96.953	65.011	N/A	N/A	31.942	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

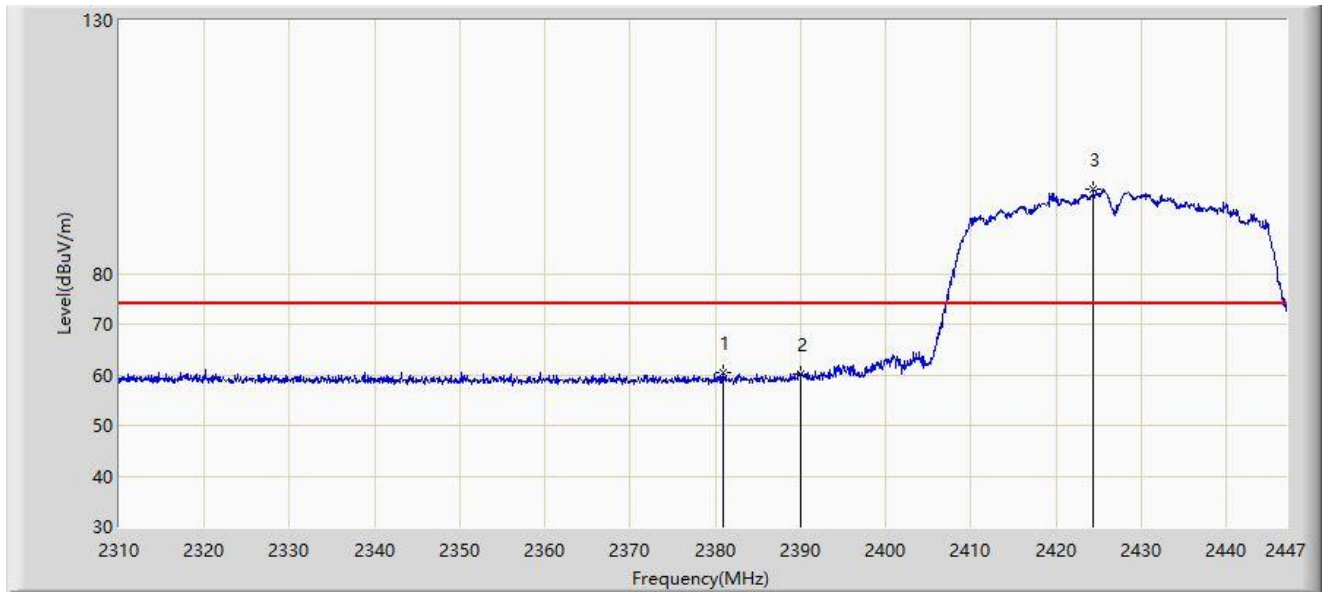


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2380.829	60.486	28.471	-13.514	74.000	32.015	PK
2			2390.000	60.019	28.016	-13.981	74.000	32.003	PK
3		*	2424.326	96.611	64.665	N/A	N/A	31.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 22:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

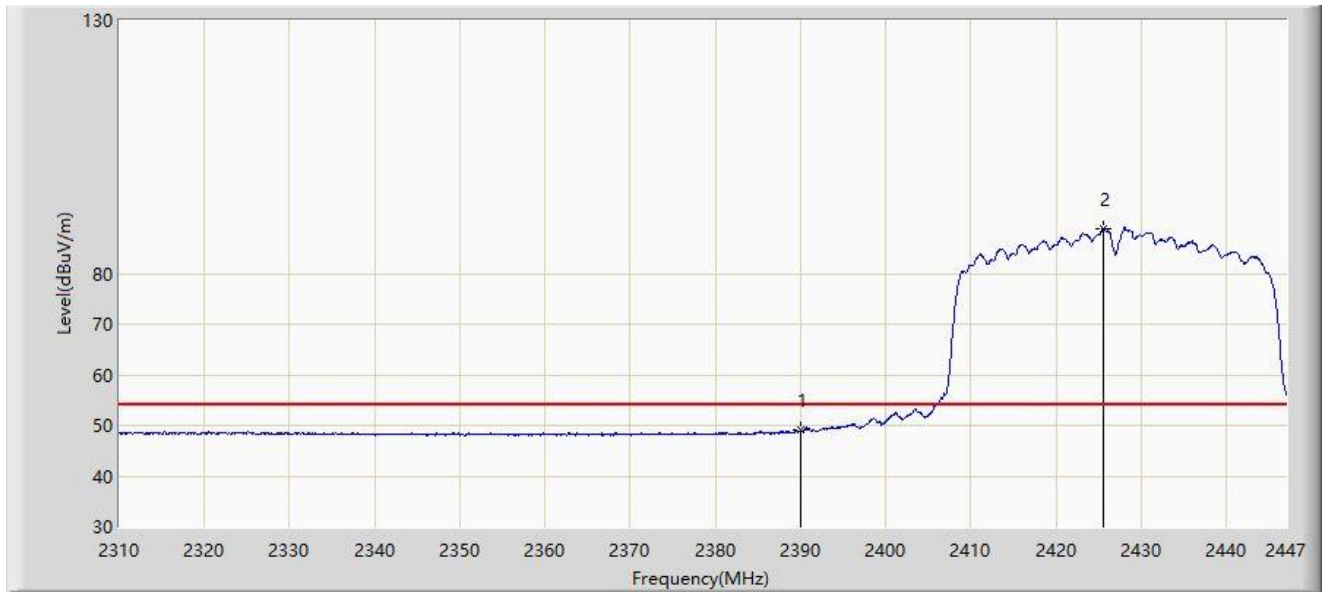


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	49.023	17.020	-4.977	54.000	32.003	AV
2		*	2425.491	88.938	56.993	N/A	N/A	31.945	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2432MHz	

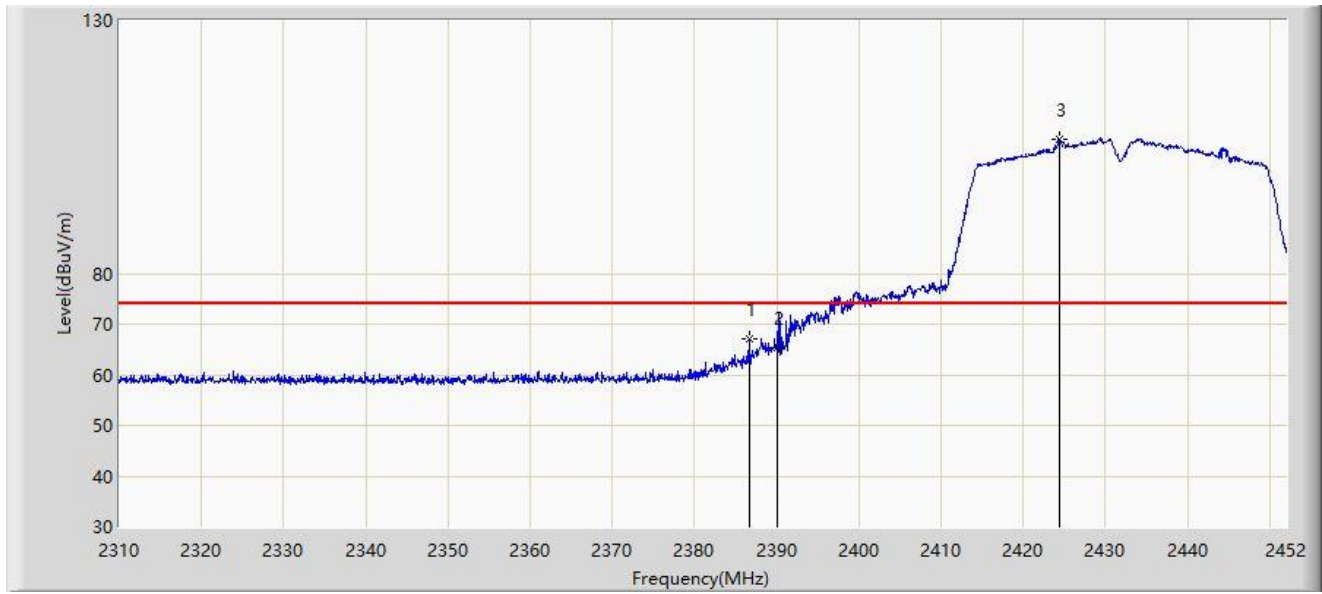


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2386.609	67.243	35.231	-6.757	74.000	32.011	PK
2			2390.000	65.388	33.385	-8.612	74.000	32.003	PK
3		*	2424.381	106.592	74.646	N/A	N/A	31.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2432MHz	

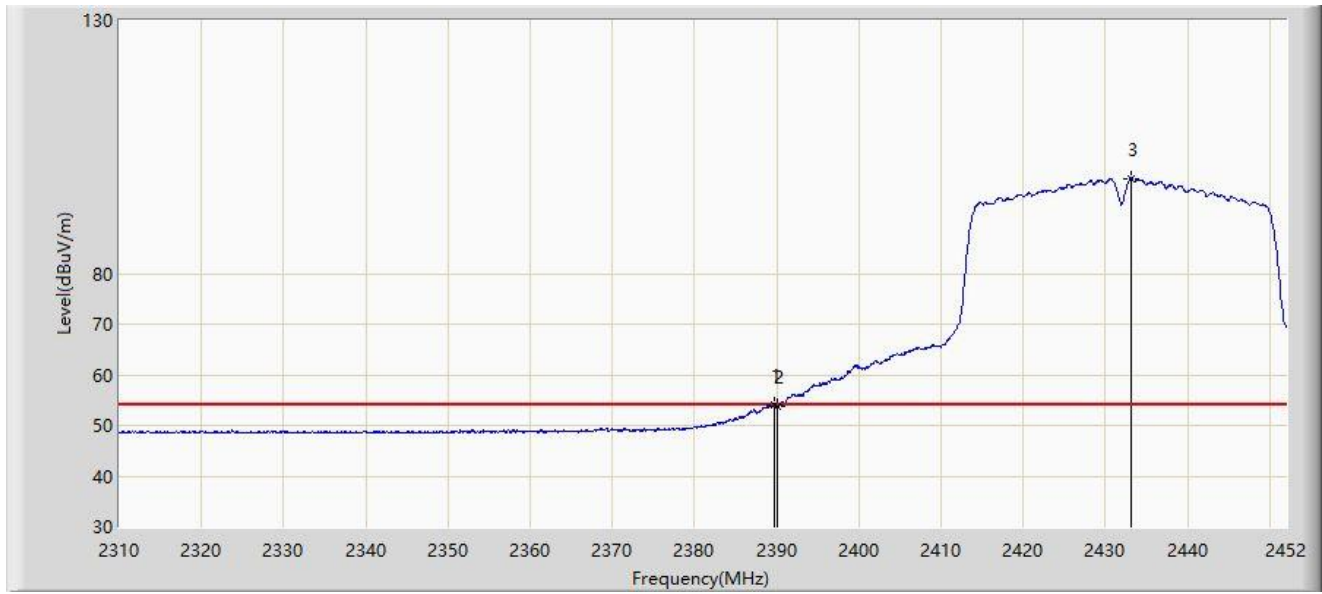


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.733	53.955	21.951	-0.045	54.000	32.004	AV
2			2390.000	53.646	21.643	-0.354	54.000	32.003	AV
3		*	2433.114	98.791	66.855	N/A	N/A	31.936	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2432MHz	

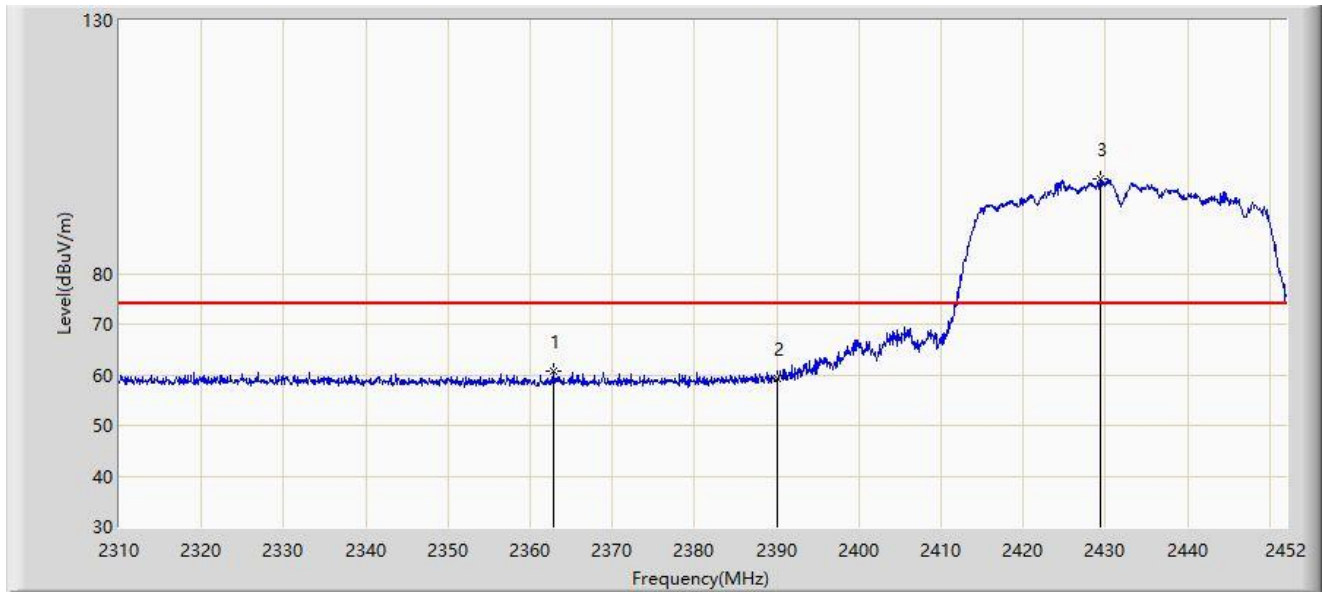


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2362.824	60.746	28.728	-13.254	74.000	32.018	PK
2			2390.000	59.158	27.155	-14.842	74.000	32.003	PK
3		*	2429.422	98.592	66.651	N/A	N/A	31.941	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2432MHz	

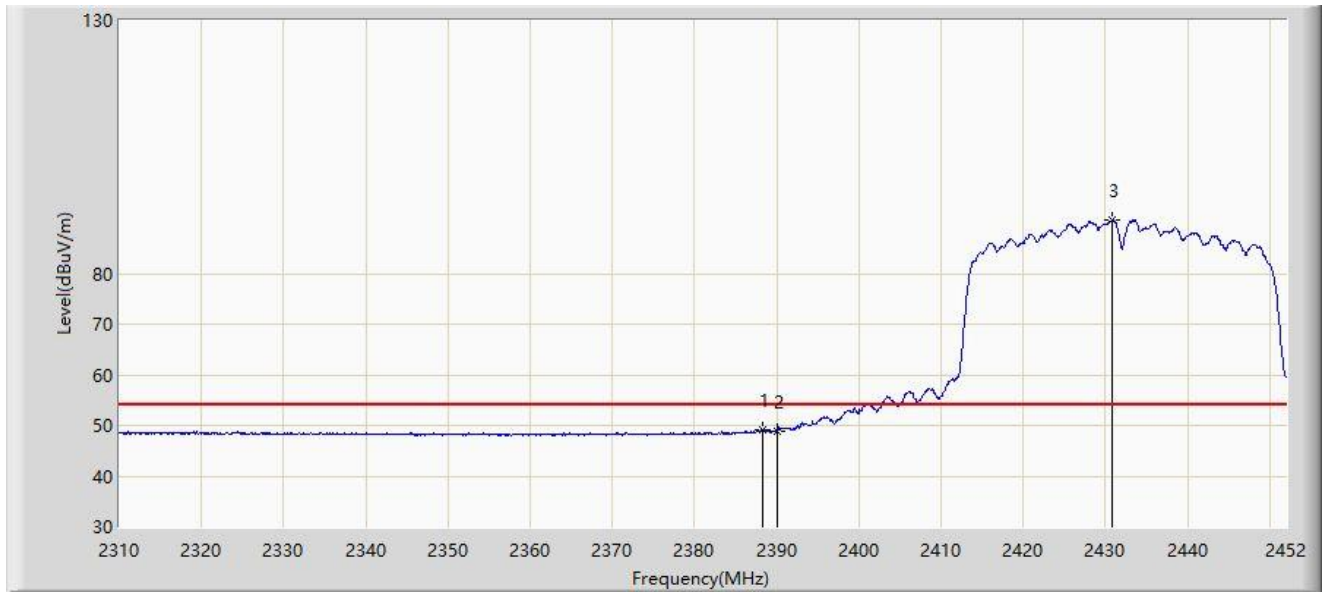


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2388.313	49.200	17.193	-4.800	54.000	32.008	AV
2			2390.000	48.873	16.870	-5.127	54.000	32.003	AV
3		*	2430.842	90.456	58.517	N/A	N/A	31.939	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2442MHz	

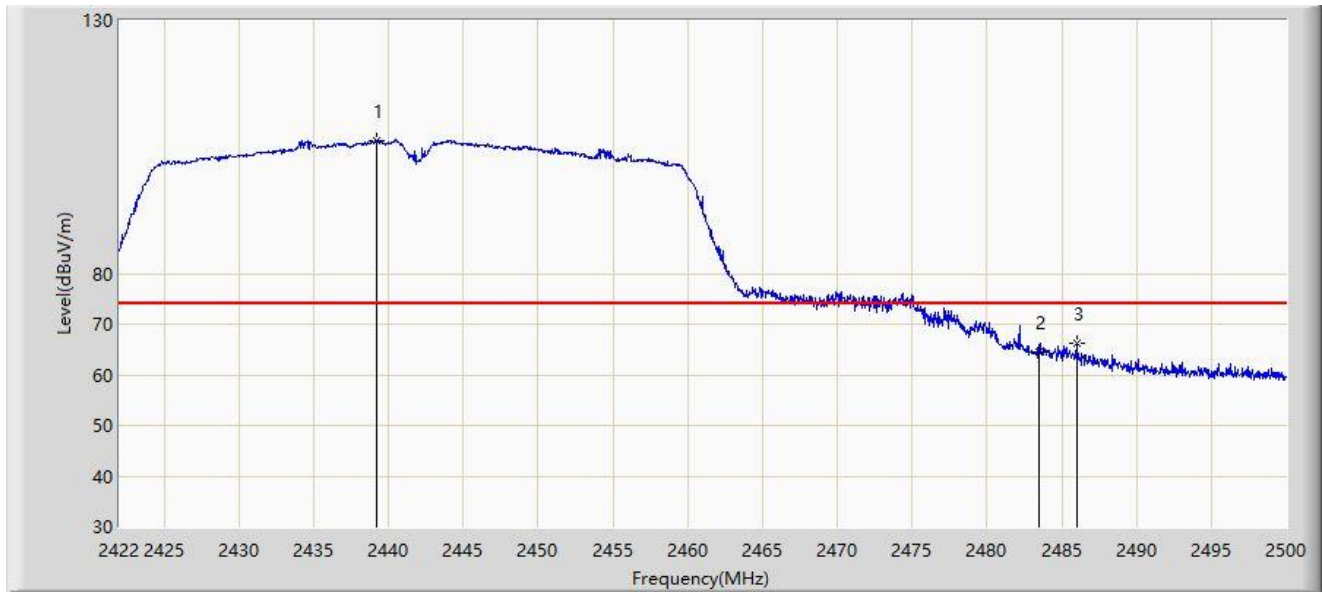


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2439.238	106.317	74.386	N/A	N/A	31.930	PK
2			2483.500	64.370	32.458	-9.630	74.000	31.912	PK
3			2485.999	66.247	34.340	-7.753	74.000	31.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2442MHz	

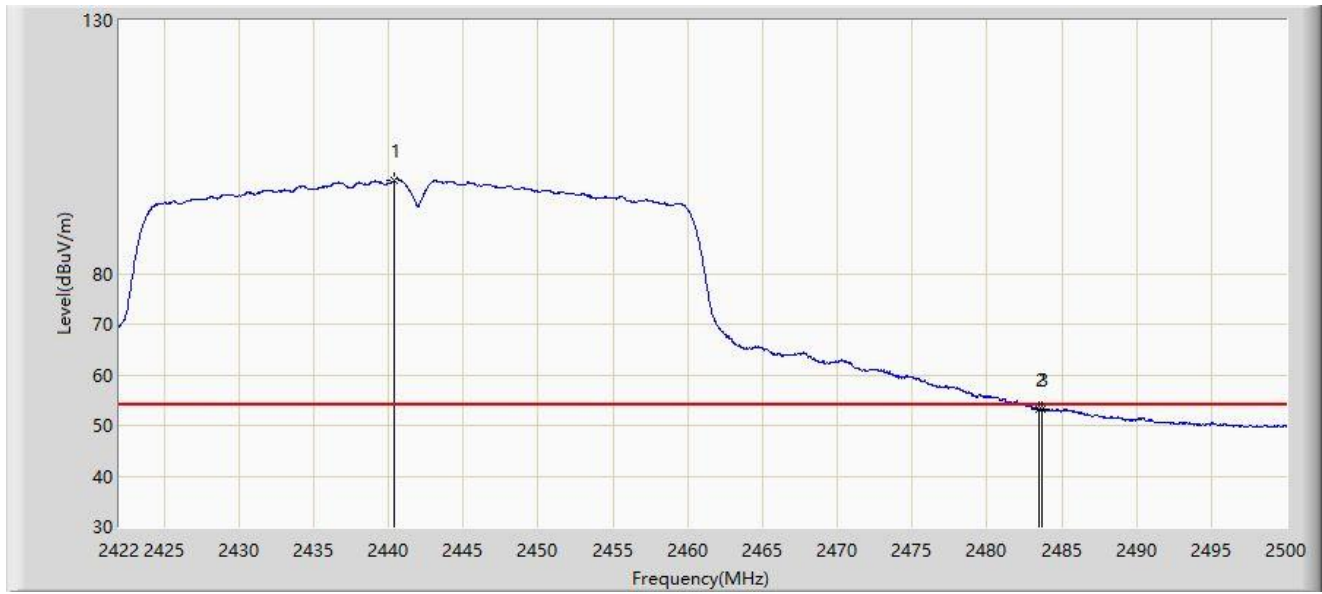


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2440.369	98.483	66.552	N/A	N/A	31.931	AV
2			2483.500	53.177	21.265	-0.823	54.000	31.912	AV
3			2483.698	53.269	21.358	-0.731	54.000	31.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2442MHz	

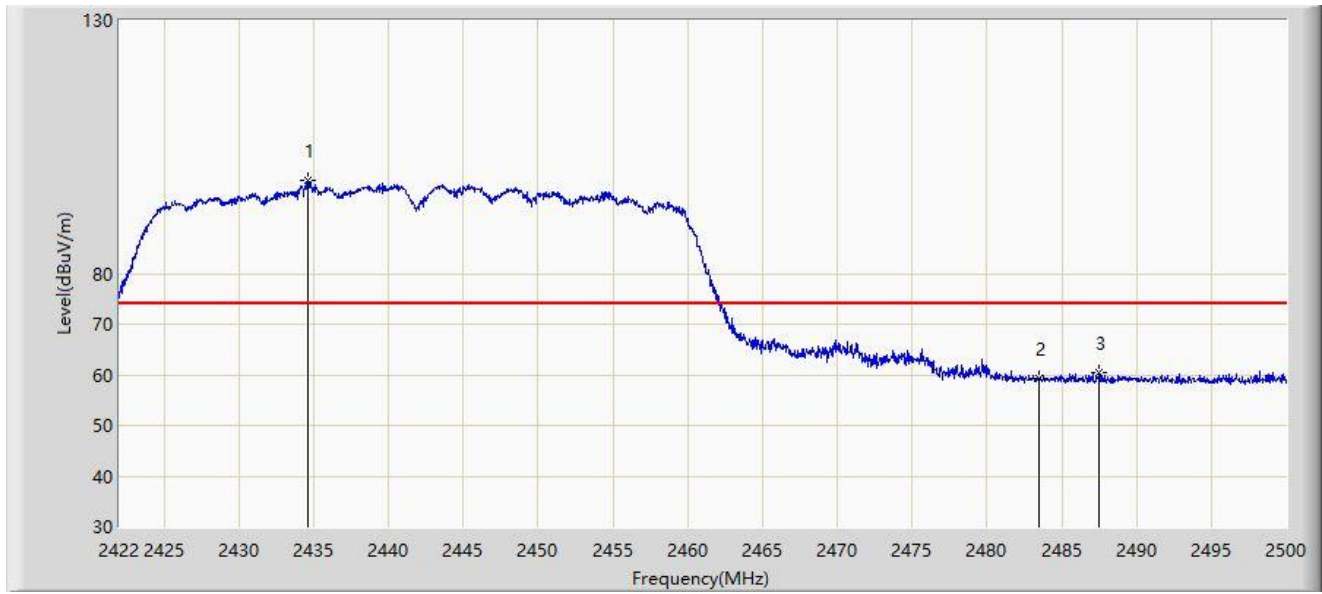


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2434.597	98.266	66.331	N/A	N/A	31.934	PK
2			2483.500	59.218	27.306	-14.782	74.000	31.912	PK
3			2487.481	60.322	28.419	-13.678	74.000	31.904	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2442MHz	

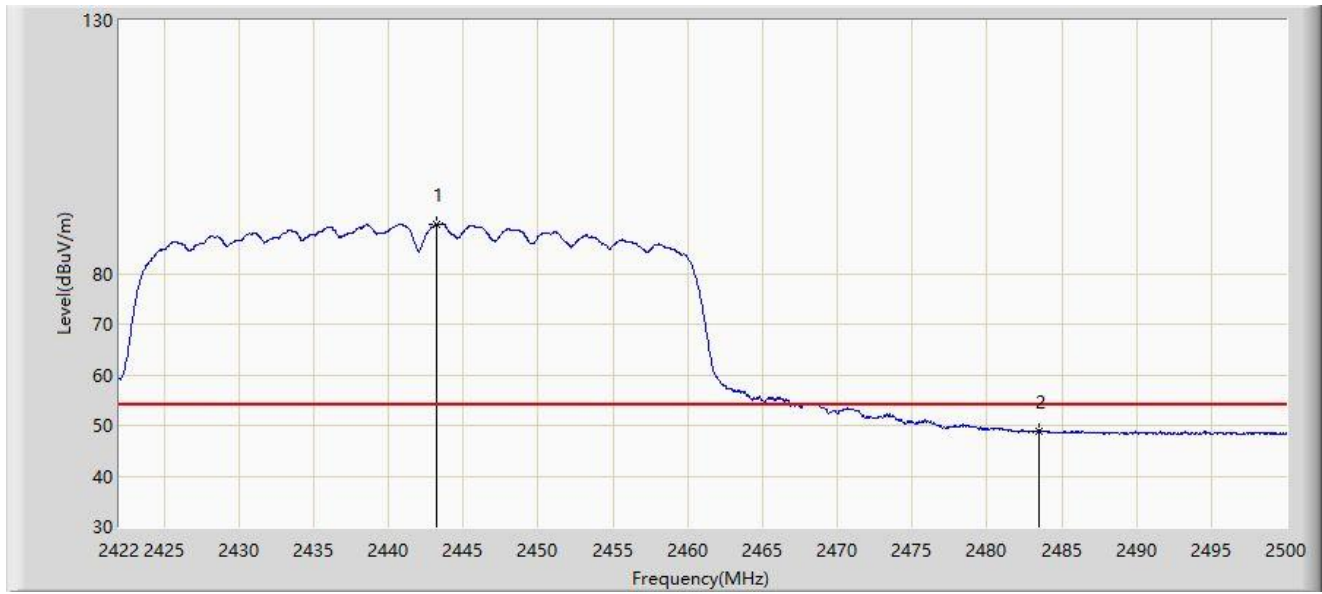


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2443.216	89.785	57.853	N/A	N/A	31.932	AV
2			2483.500	48.980	17.068	-5.020	54.000	31.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

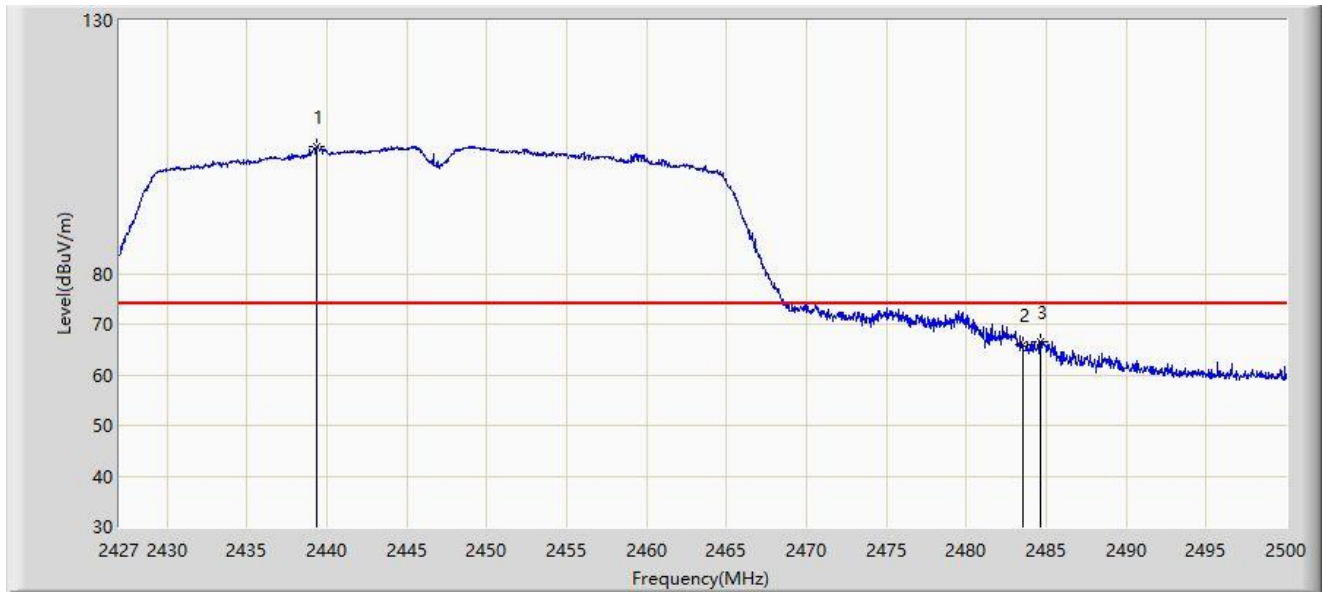


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2439.337	105.059	73.128	N/A	N/A	31.931	PK
2			2483.500	65.833	33.921	-8.167	74.000	31.912	PK
3			2484.670	66.620	34.711	-7.380	74.000	31.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

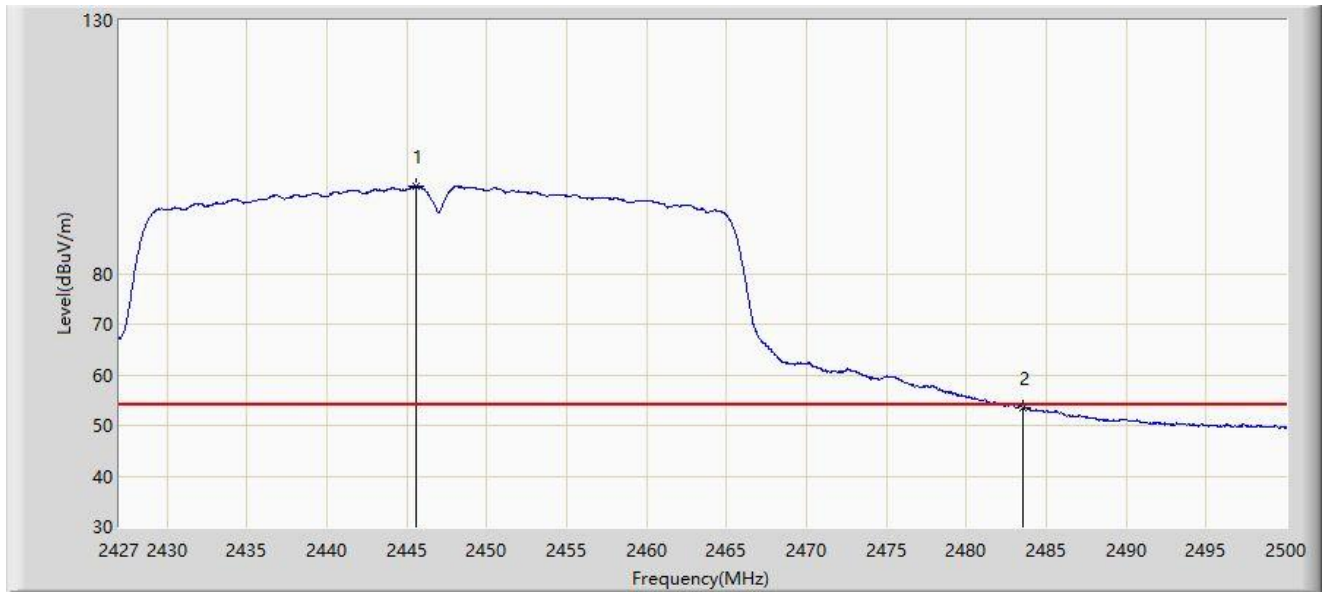


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2445.542	97.309	65.376	N/A	N/A	31.933	AV
2			2483.500	53.615	21.703	-0.385	54.000	31.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

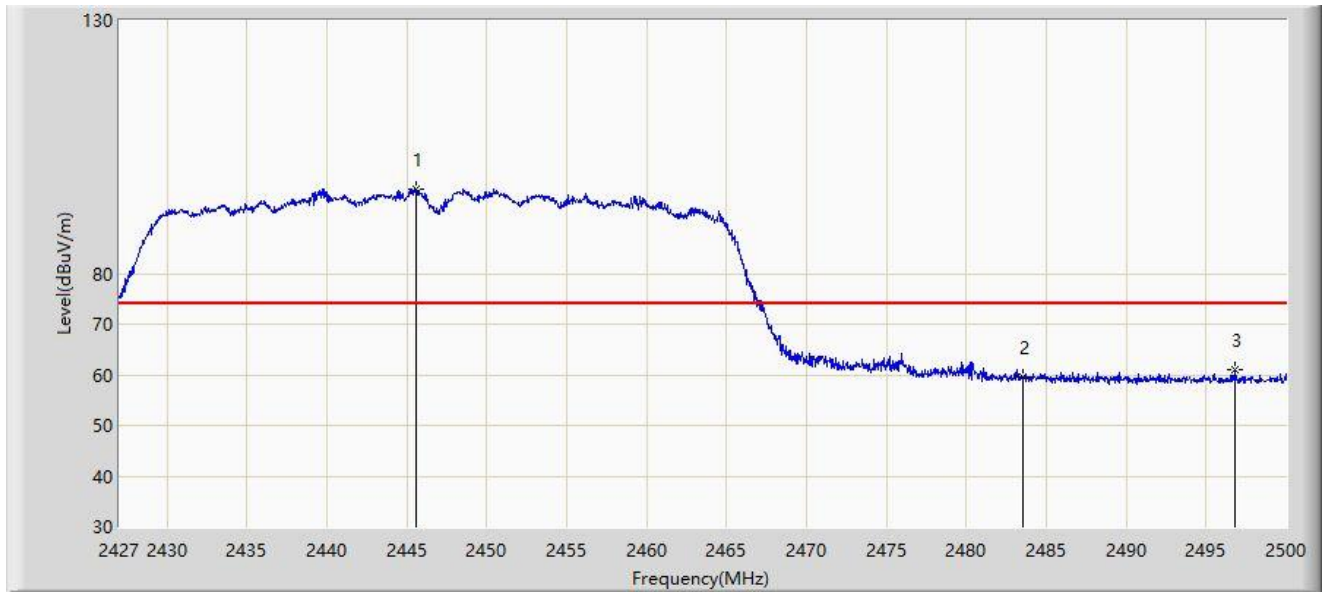


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2445.615	96.619	64.686	N/A	N/A	31.933	PK
2			2483.500	59.675	27.763	-14.325	74.000	31.912	PK
3			2496.788	61.059	29.148	-12.941	74.000	31.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/05/21 - 23:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

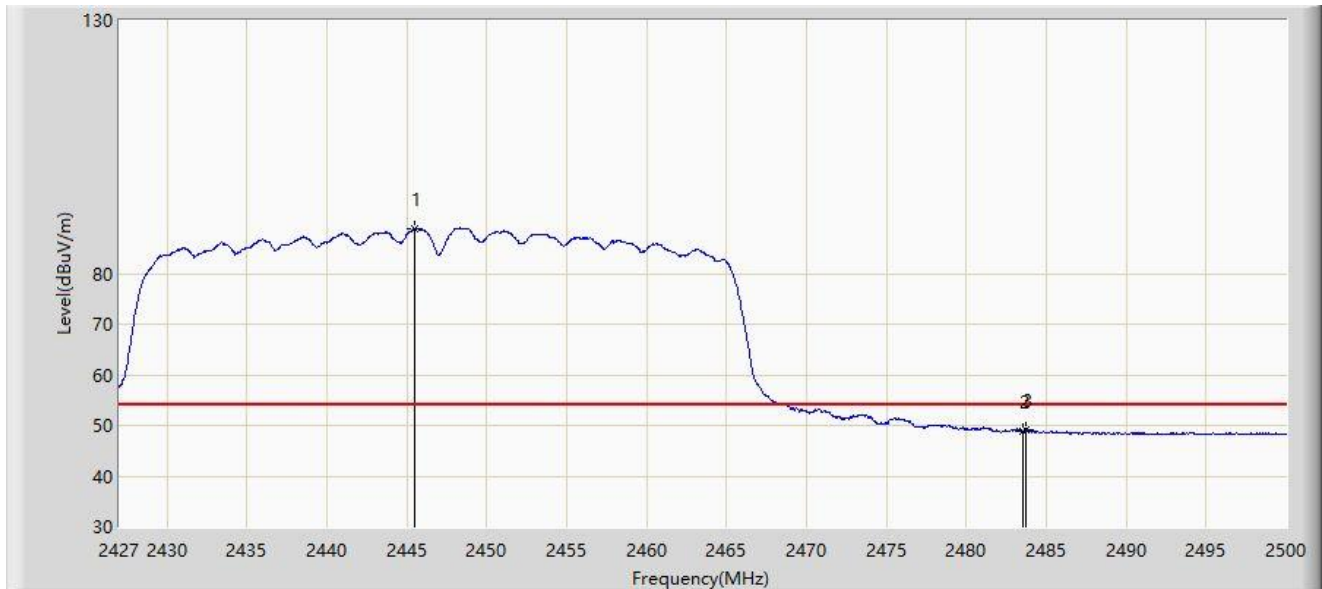


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2445.506	88.907	56.974	N/A	N/A	31.933	AV
2			2483.500	48.959	17.047	-5.041	54.000	31.912	AV
3			2483.758	49.056	17.145	-4.944	54.000	31.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

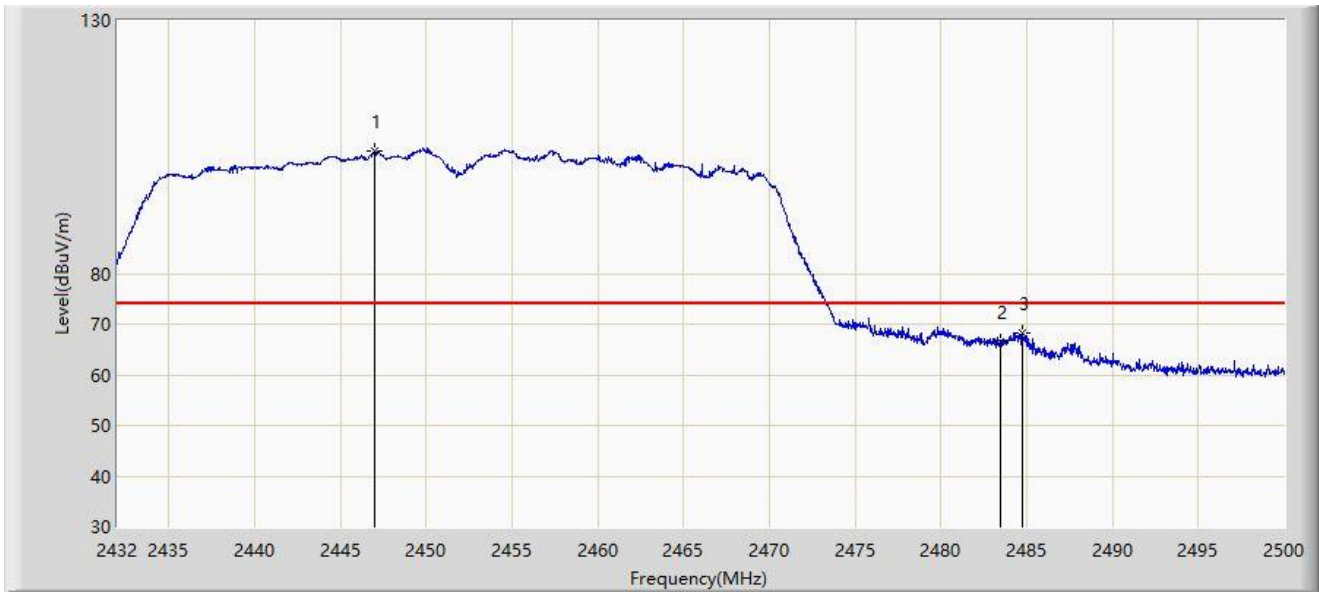


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2446.994	104.178	73.327	N/A	N/A	30.851	PK
2			2483.500	66.451	35.563	-7.549	74.000	30.888	PK
3			2484.768	68.203	37.316	-5.797	74.000	30.887	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

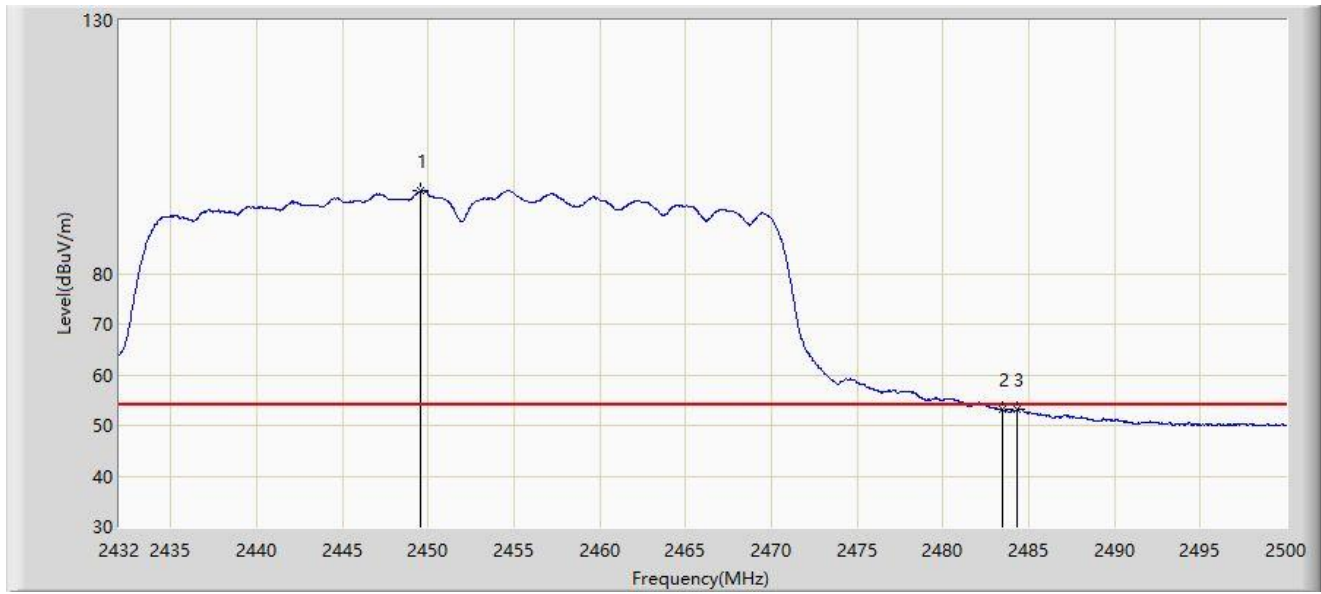


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2449.578	96.353	65.502	N/A	N/A	30.850	AV
2			2483.500	53.079	22.191	-0.921	54.000	30.888	AV
3			2484.360	53.286	22.399	-0.714	54.000	30.887	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

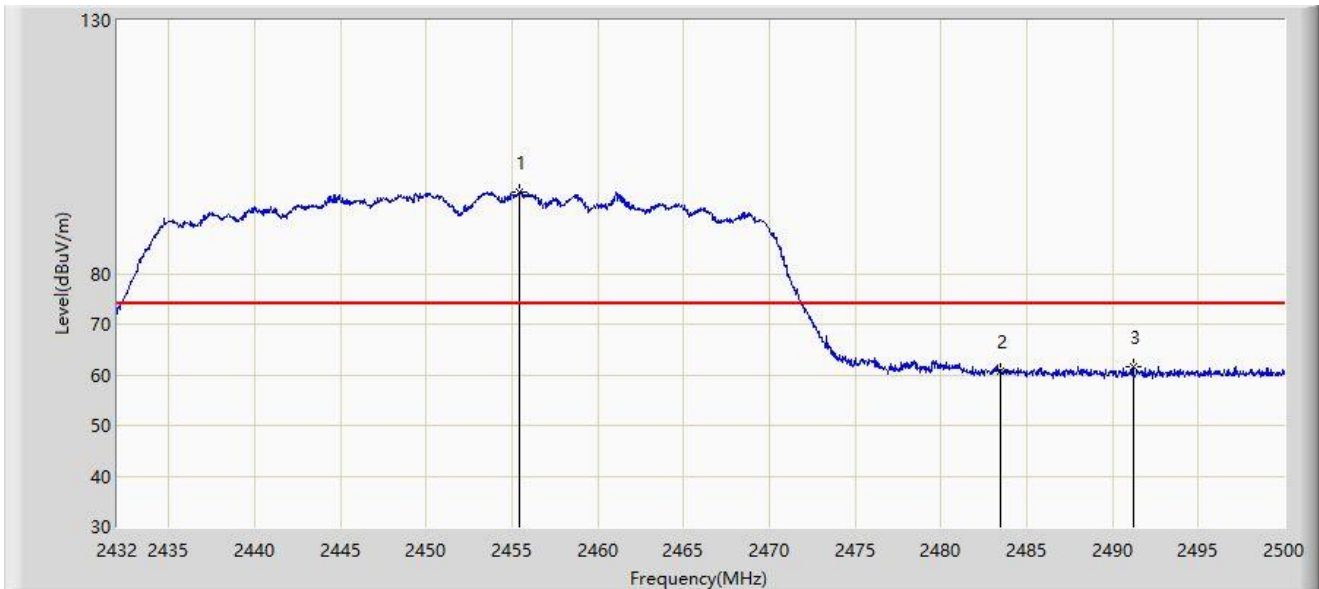


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2455.426	96.022	65.172	N/A	N/A	30.850	PK
2			2483.500	60.794	29.906	-13.206	74.000	30.888	PK
3			2491.194	61.729	30.846	-12.271	74.000	30.883	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: NS-AC1	Time: 2021/04/30 - 15:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

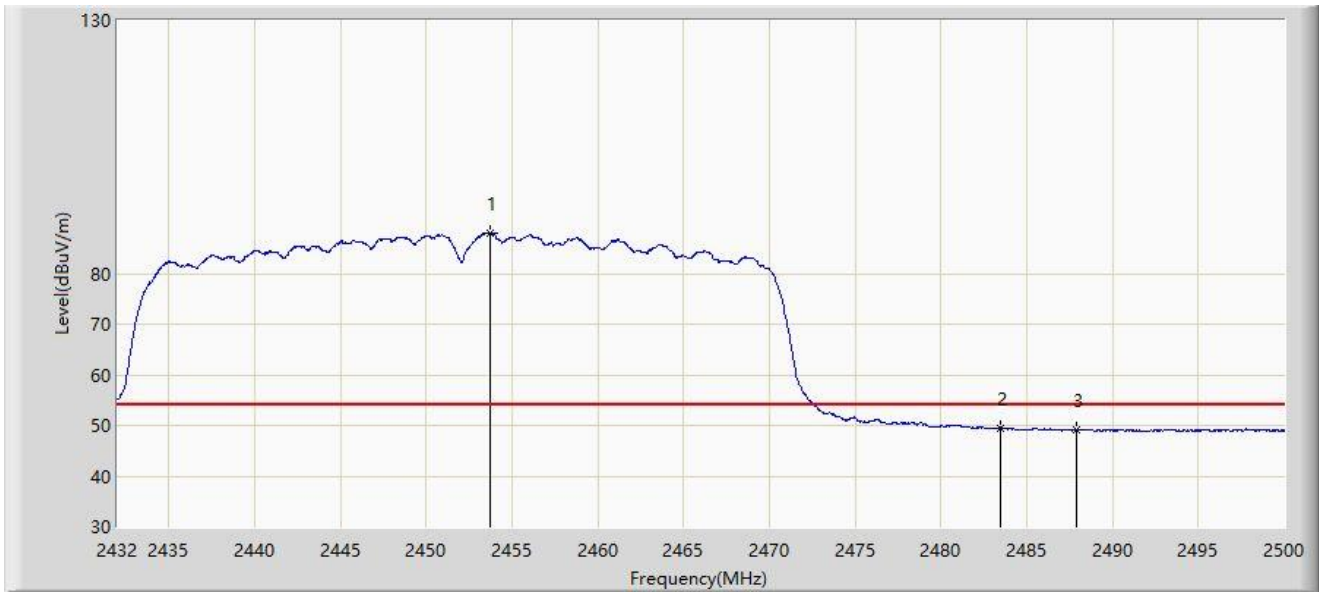


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2453.760	88.054	57.204	N/A	N/A	30.850	AV
2			2483.500	49.553	18.665	-4.447	54.000	30.888	AV
3			2487.896	49.128	18.243	-4.872	54.000	30.885	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

A.7 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2021/08/18 - 14:32
Limit: FCC_Part15.207_CE_AC Power	Engineer: Messiah Li
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

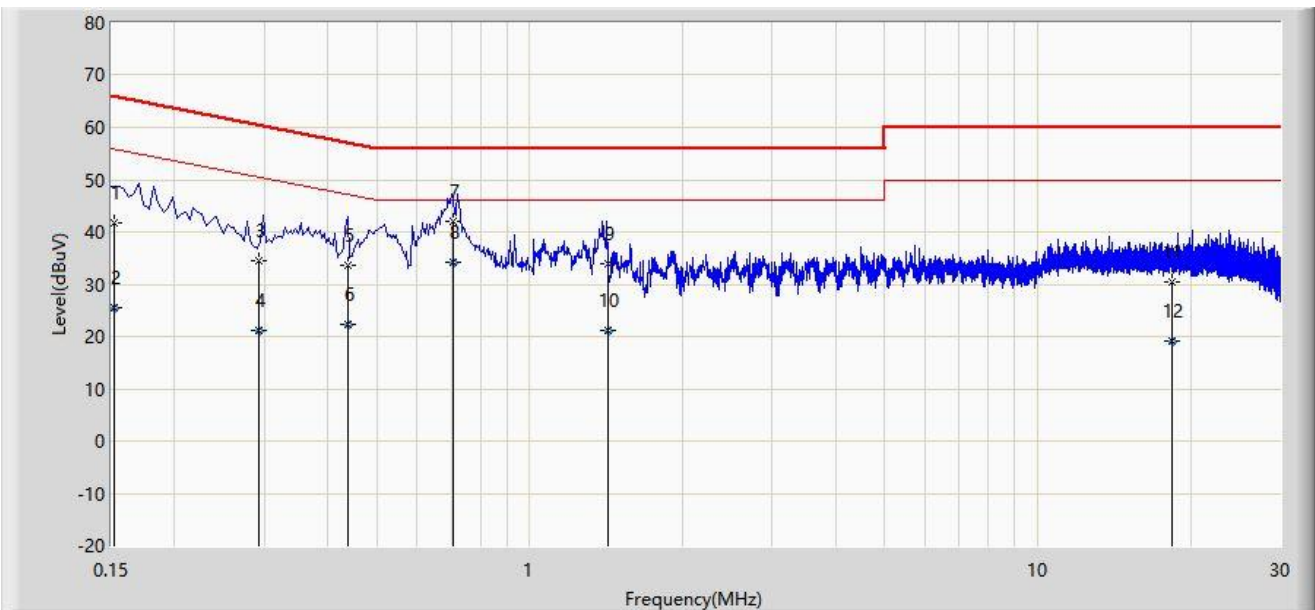


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.152	41.688	31.700	-24.202	65.890	9.988	QP
2			0.152	25.388	15.400	-30.502	55.890	9.988	AV
3			0.293	34.394	24.400	-26.045	60.439	9.994	QP
4			0.293	21.094	11.100	-29.345	50.439	9.994	AV
5			0.439	33.709	23.700	-23.372	57.081	10.009	QP
6			0.439	22.409	12.400	-24.672	47.081	10.009	AV
7			0.708	42.039	32.000	-13.961	56.000	10.039	QP
8		*	0.708	34.239	24.200	-11.761	46.000	10.039	AV
9			1.428	34.019	23.900	-21.981	56.000	10.119	QP
10			1.428	21.019	10.900	-24.981	46.000	10.119	AV
11			18.420	30.525	15.200	-29.475	60.000	15.326	QP
12			18.420	19.125	3.800	-30.875	50.000	15.326	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2021/08/18 - 14:51
Limit: FCC_Part15.207_CE_AC Power	Engineer: Messiah Li
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: AC1200 Wi-Fi Range Extender	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

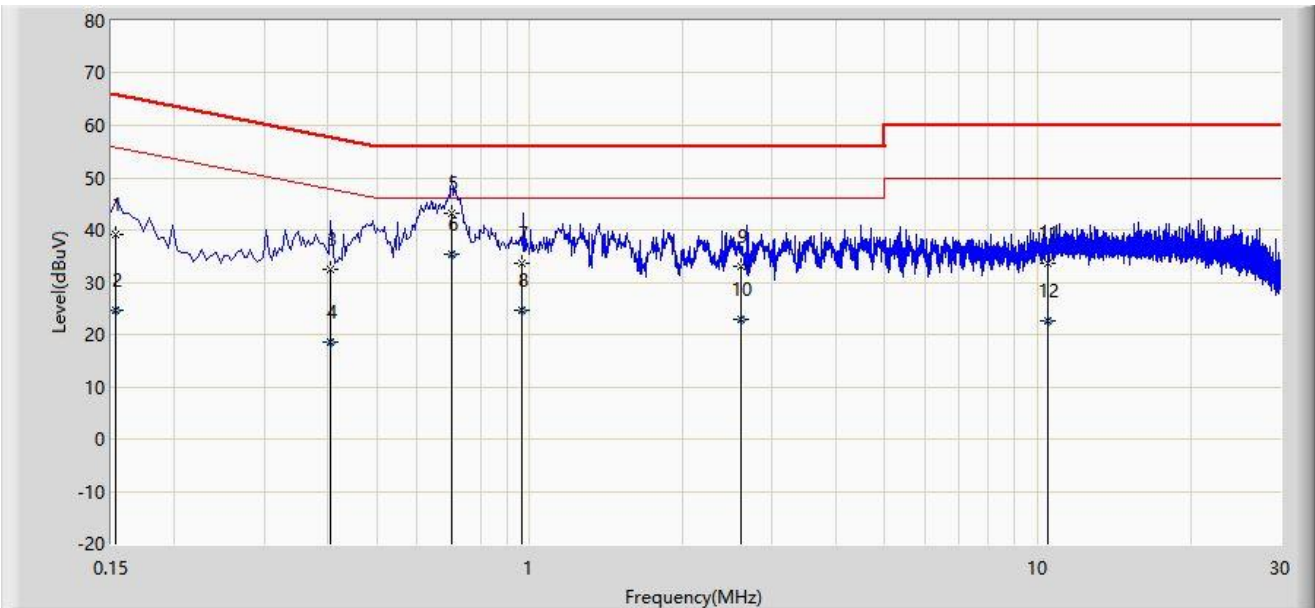

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.153	39.032	29.000	-26.804	65.836	10.032	QP
2			0.153	24.632	14.600	-31.204	55.836	10.032	AV
3			0.406	32.443	22.400	-25.286	57.730	10.043	QP
4			0.406	18.643	8.600	-29.086	47.730	10.043	AV
5			0.703	43.268	33.200	-12.732	56.000	10.068	QP
6		*	0.703	35.468	25.400	-10.532	46.000	10.068	AV
7			0.963	33.596	23.500	-22.404	56.000	10.097	QP
8			0.963	24.696	14.600	-21.304	46.000	10.097	AV
9			2.604	33.083	22.700	-22.917	56.000	10.384	QP
10			2.604	22.983	12.600	-23.017	46.000	10.384	AV
11			10.480	33.618	20.900	-26.382	60.000	12.718	QP
12			10.480	22.618	9.900	-27.382	50.000	12.718	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2104RSU020-UT” file.

Appendix C - EUT Photograph

Refer to “2104RSU020-UE” file.

The End
