


EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

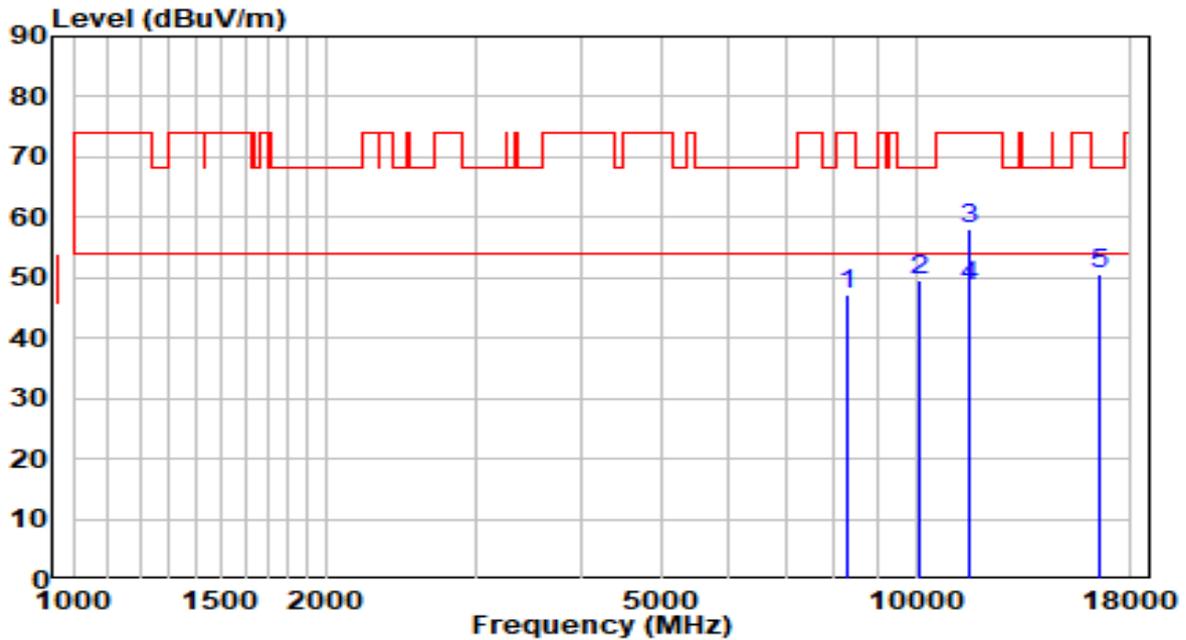


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	34.75	12.48	47.23	-26.77	74.00	Peak
2	10078.000	33.86	15.63	49.49	-18.71	68.20	Peak
3	11574.000	39.74	18.36	58.10	-15.90	74.00	Peak
4	* 11590.100	30.30	18.34	48.64	-5.36	54.00	Average
5	16521.000	28.45	22.11	50.56	-17.64	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

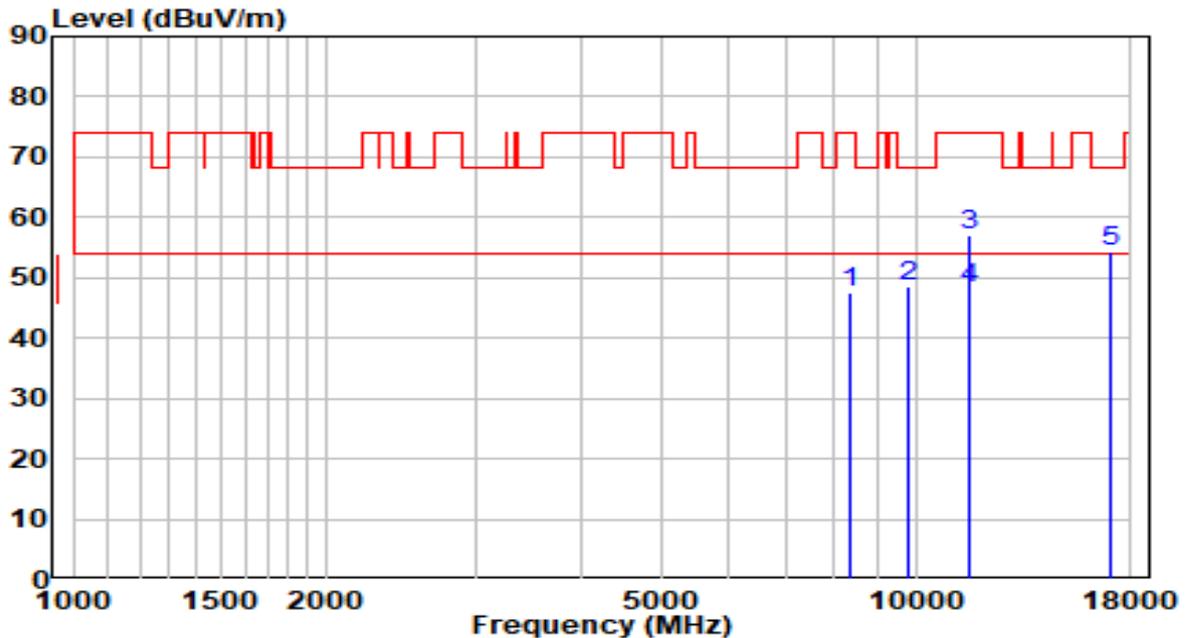


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8378.000	35.03	12.47	47.50	-26.50	74.00	Peak
2	9823.000	33.49	15.03	48.52	-19.68	68.20	Peak
3	11591.000	38.56	18.34	56.90	-17.10	74.00	Peak
4	* 11592.650	29.80	18.33	48.13	-5.87	54.00	Average
5	17082.000	28.06	26.43	54.50	-13.70	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

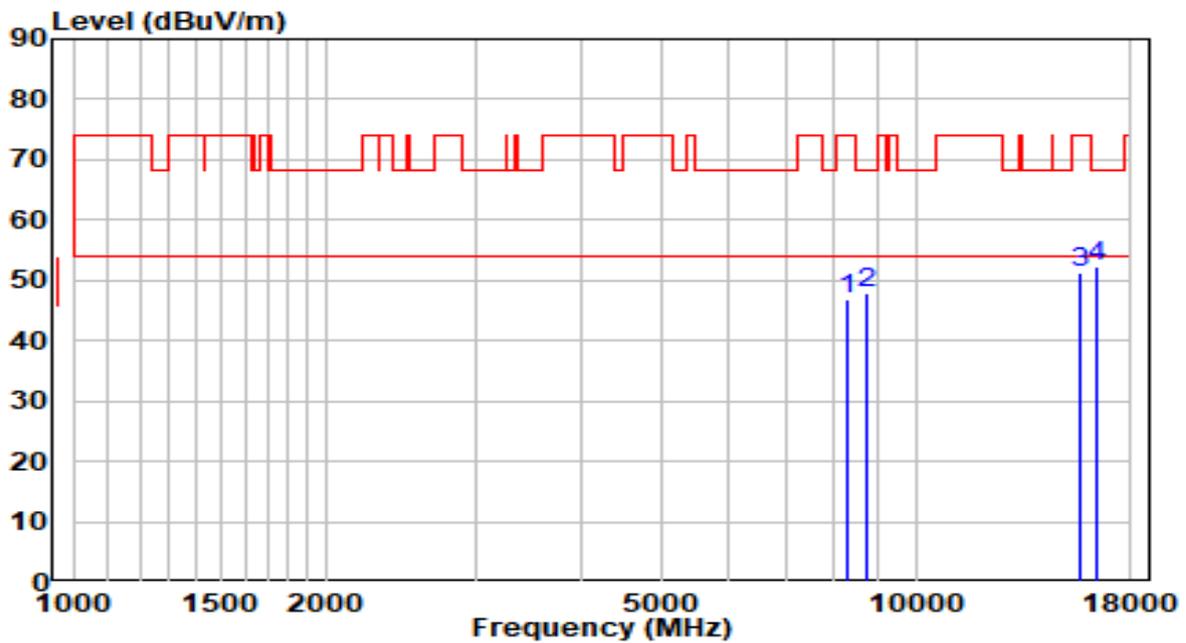


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8293.000	34.34	12.49	46.83	-27.17	74.00	Peak
2	8752.000	34.93	13.07	48.00	-20.20	68.20	Peak
3	15654.000	29.99	21.19	51.18	-22.82	74.00	Peak
4	* 16419.000	30.41	21.74	52.15	-16.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

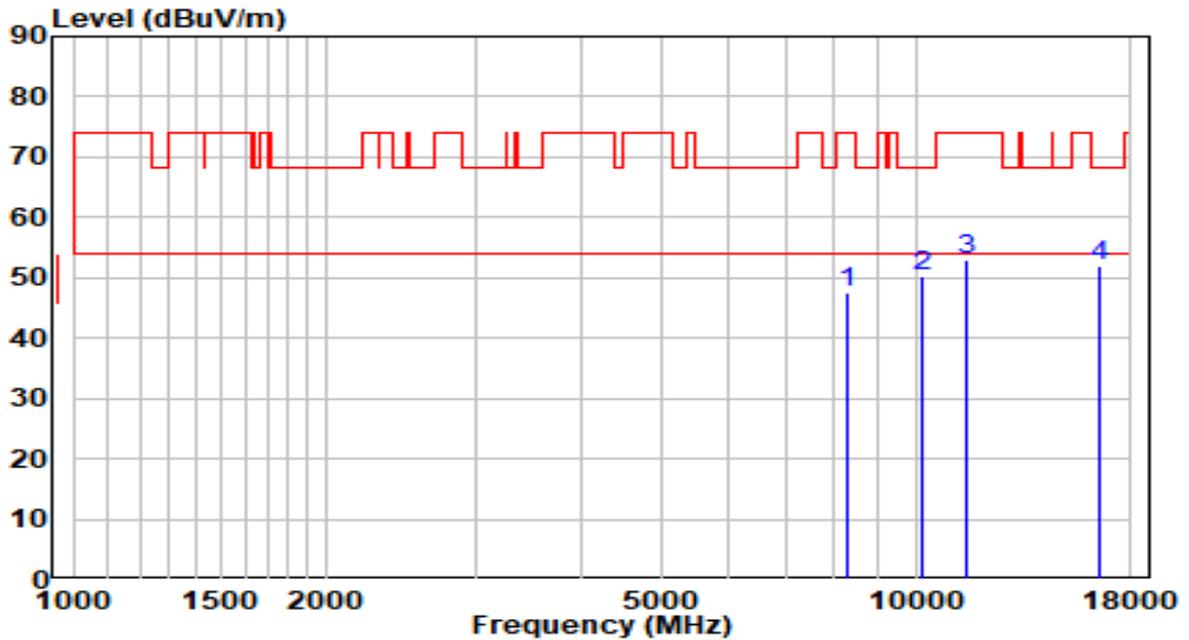


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8276.000	35.03	12.49	47.52	-26.48	74.00	Peak
2	10197.000	34.33	16.03	50.36	-17.84	68.20	Peak
3	11489.000	34.55	18.44	52.98	-21.02	74.00	Peak
4	* 16555.000	29.51	22.36	51.87	-16.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

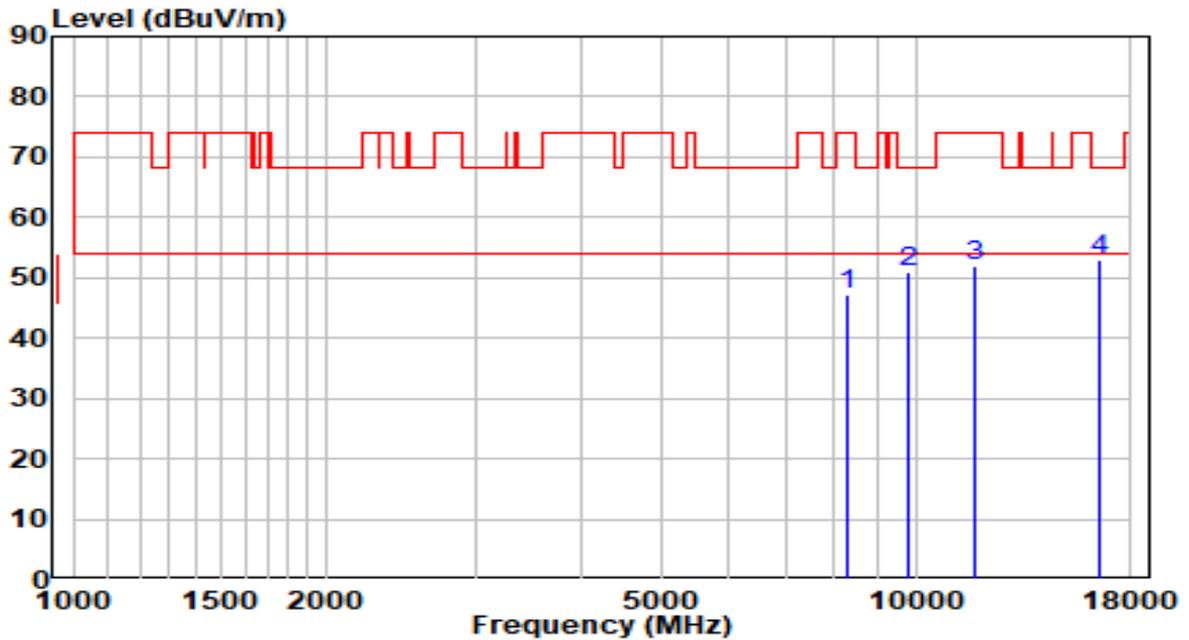


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	34.81	12.48	47.30	-26.70	74.00	Peak
2	9806.000	35.92	15.00	50.91	-17.29	68.20	Peak
3	11761.000	33.98	18.12	52.10	-21.90	74.00	Peak
4	* 16470.000	31.20	21.88	53.08	-15.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

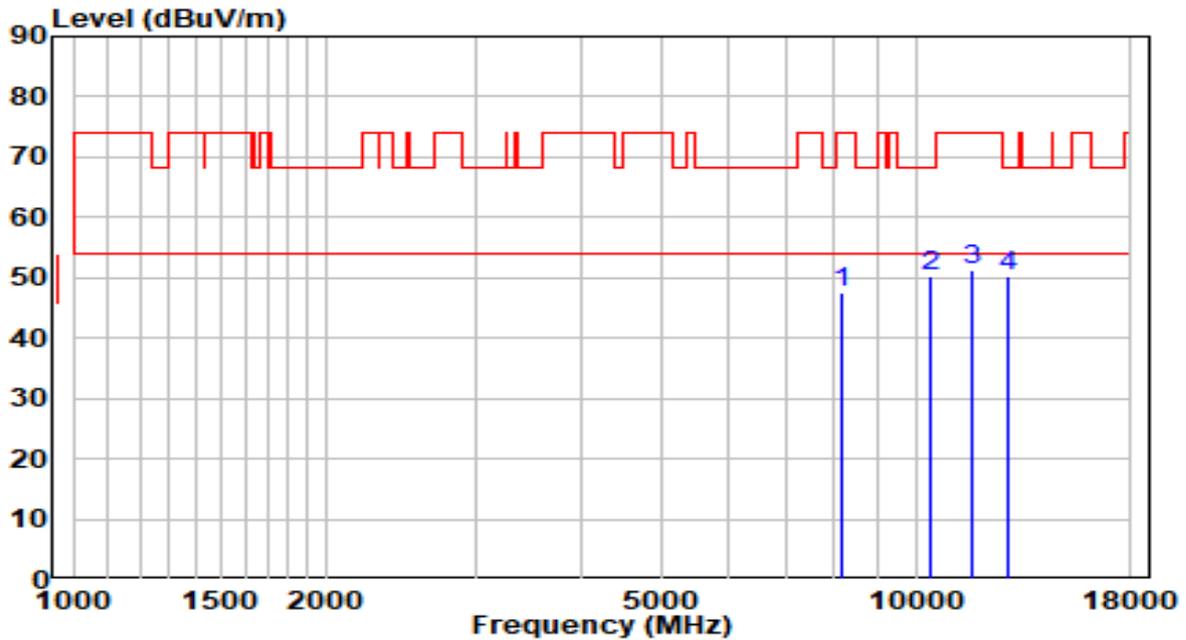


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8174.000	34.91	12.50	47.41	-26.59	74.00	Peak
2	10435.000	33.33	16.85	50.18	-18.02	68.20	Peak
3	11676.000	32.92	18.23	51.15	-22.85	74.00	Peak
4	* 12849.000	31.32	18.87	50.19	-18.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

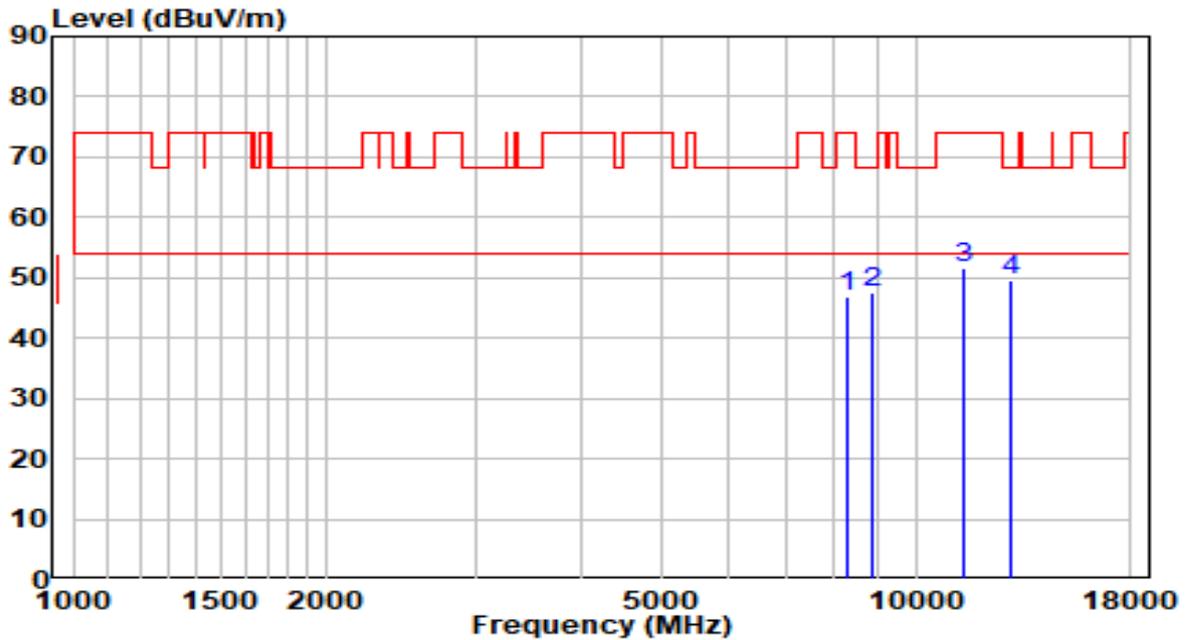


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	34.32	12.48	46.80	-27.20	74.00	Peak
2	8871.000	34.26	13.36	47.62	-20.58	68.20	Peak
3	11404.000	33.15	18.32	51.48	-22.52	74.00	Peak
4	* 13002.000	30.18	19.30	49.48	-18.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

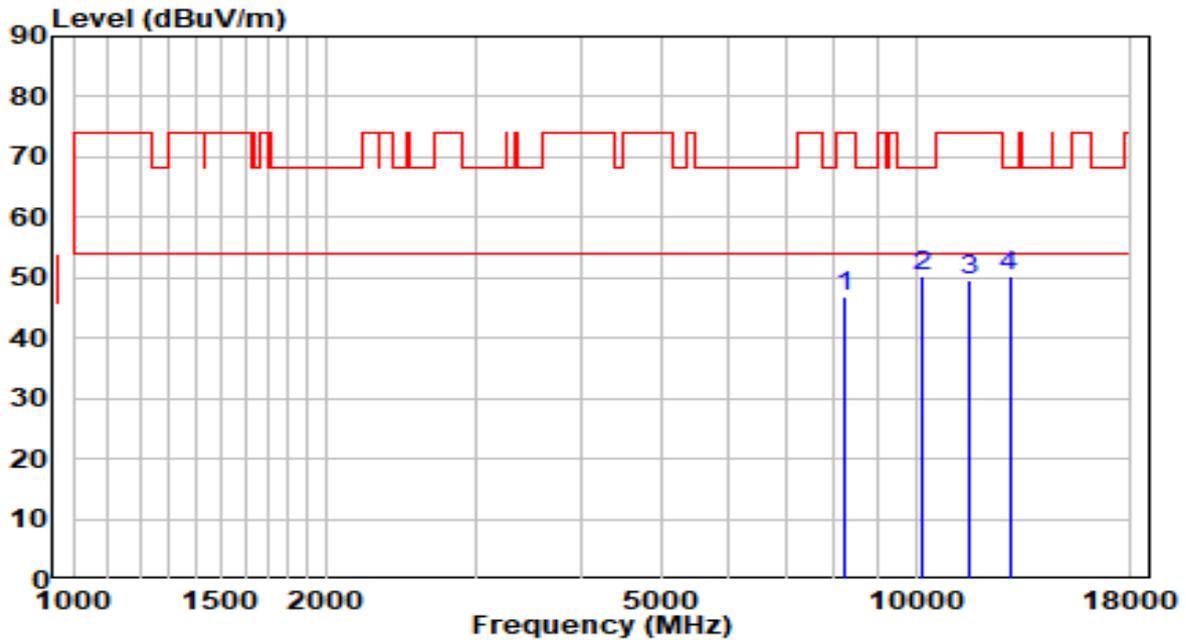


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	34.42	12.49	46.91	-27.09	74.00	Peak
2	* 10163.000	34.28	15.92	50.19	-18.01	68.20	Peak
3	11574.000	31.31	18.36	49.67	-24.33	74.00	Peak
4	12917.000	31.10	19.06	50.16	-18.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

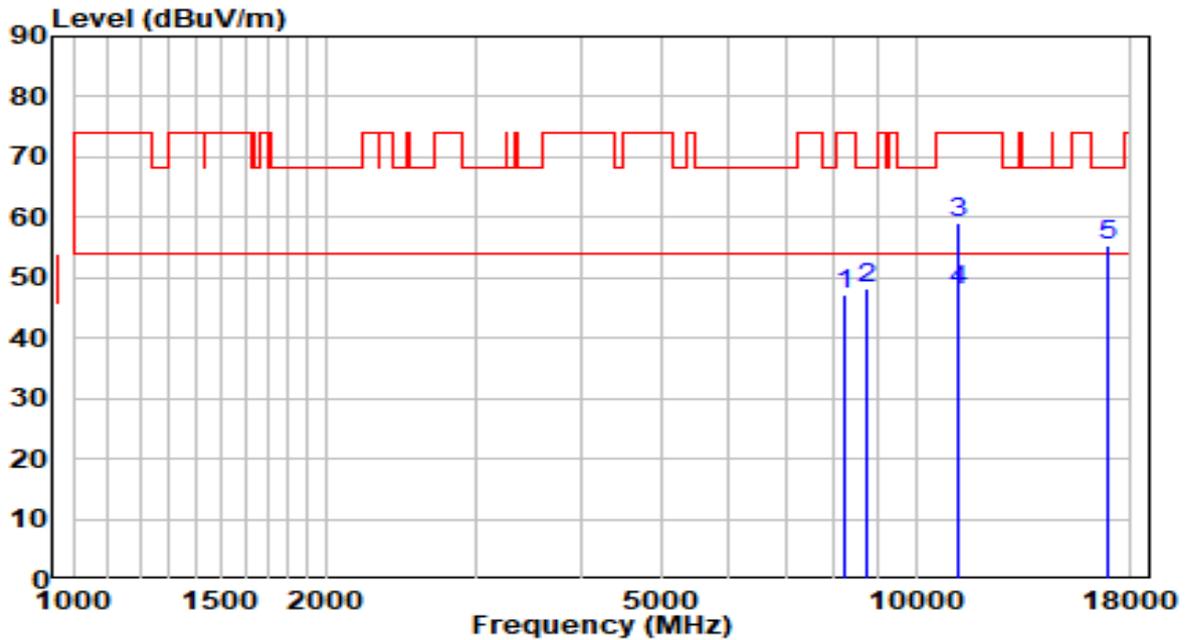


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	34.77	12.49	47.26	-26.74	74.00	Peak
2	8769.000	35.01	13.11	48.13	-20.07	68.20	Peak
3	11200.000	40.93	18.05	58.97	-15.03	74.00	Peak
4	* 11233.100	29.94	18.09	48.04	-5.96	54.00	Average
5	16861.000	30.87	24.60	55.47	-12.73	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

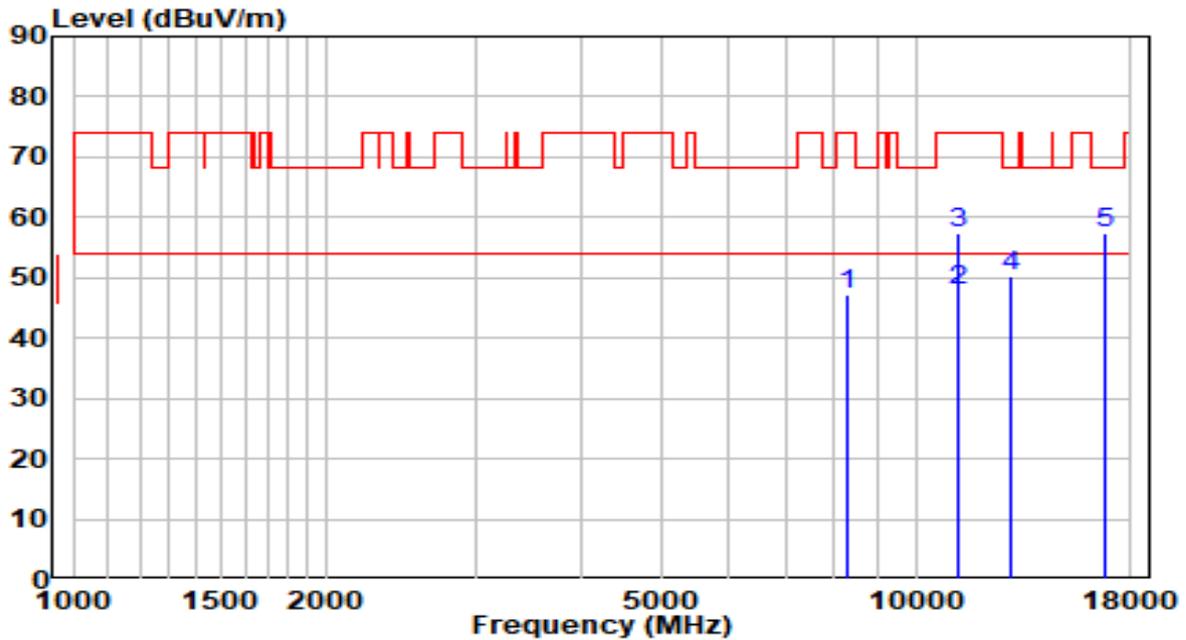


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	34.82	12.48	47.30	-26.70	74.00	Peak
2	* 11215.000	29.95	18.07	48.02	-5.98	54.00	Average
3	11217.000	39.30	18.07	57.37	-16.63	74.00	Peak
4	12968.000	31.06	19.20	50.26	-17.94	68.20	Peak
5	16810.000	33.16	24.22	57.38	-10.82	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

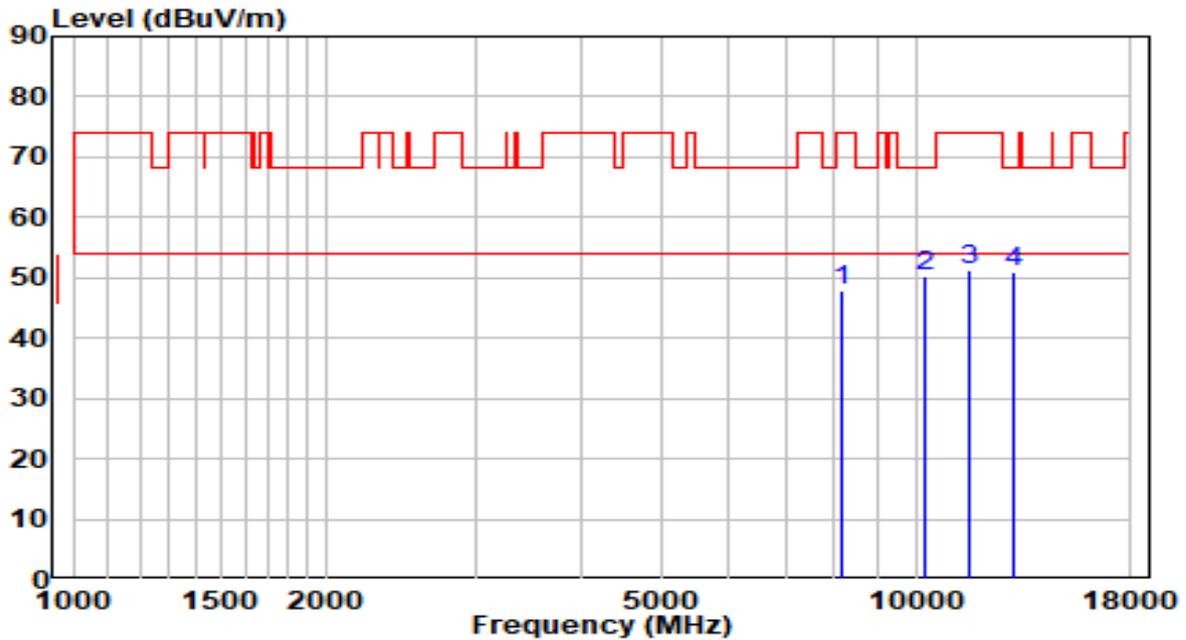


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8191.000	35.28	12.50	47.78	-26.22	74.00	Peak
2	10282.000	33.94	16.32	50.26	-17.94	68.20	Peak
3	11608.000	33.04	18.31	51.35	-22.65	74.00	Peak
4	* 13019.000	31.48	19.34	50.82	-17.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

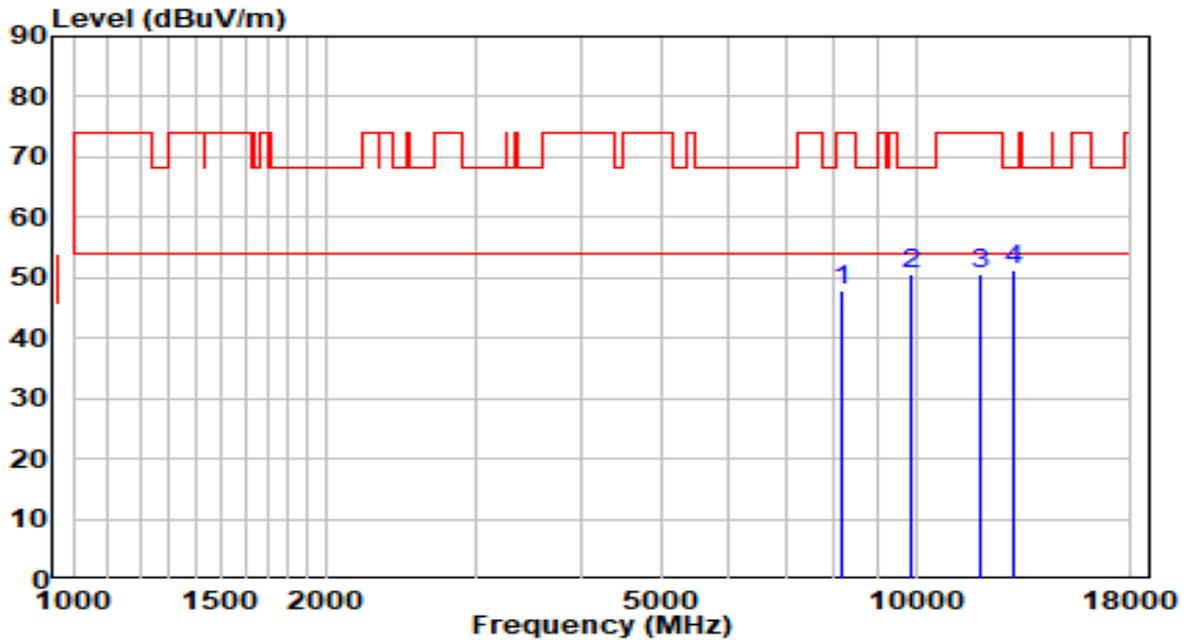


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8191.000	35.34	12.50	47.84	-26.16	74.00	Peak
2	9874.000	35.60	15.12	50.72	-17.48	68.20	Peak
3	11897.000	32.52	17.95	50.47	-23.53	74.00	Peak
4	* 13070.000	31.84	19.47	51.31	-16.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

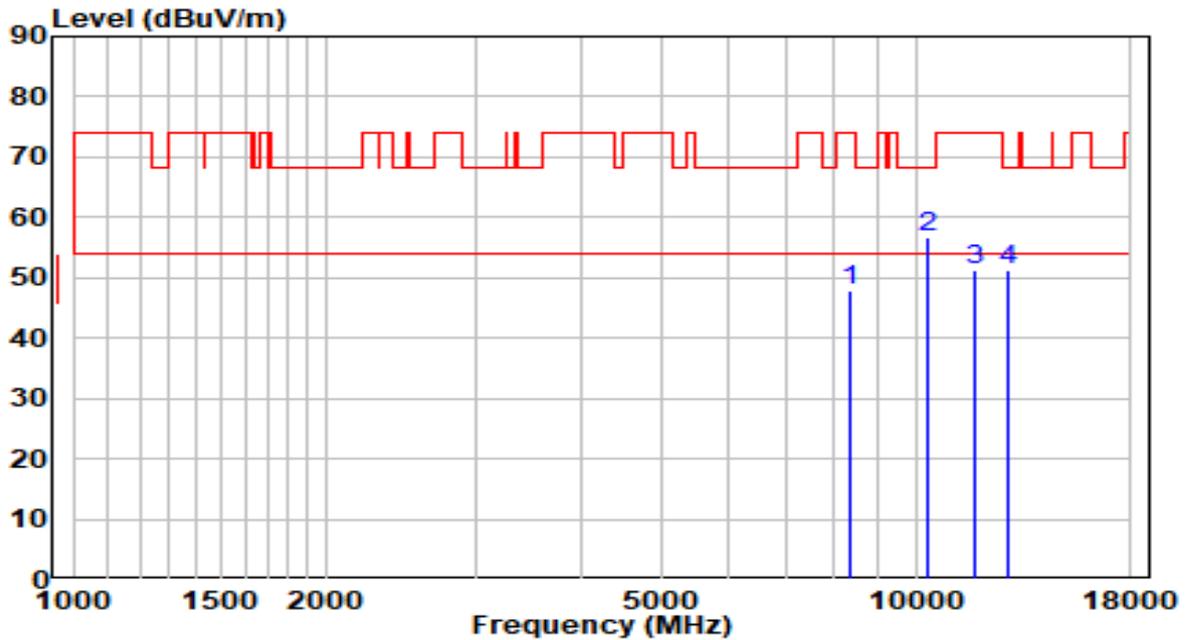


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8378.000	35.43	12.47	47.90	-26.10	74.00	Peak
2	* 10367.000	40.06	16.62	56.67	-11.53	68.20	Peak
3	11778.000	33.31	18.10	51.41	-22.59	74.00	Peak
4	12832.000	32.30	18.82	51.13	-17.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

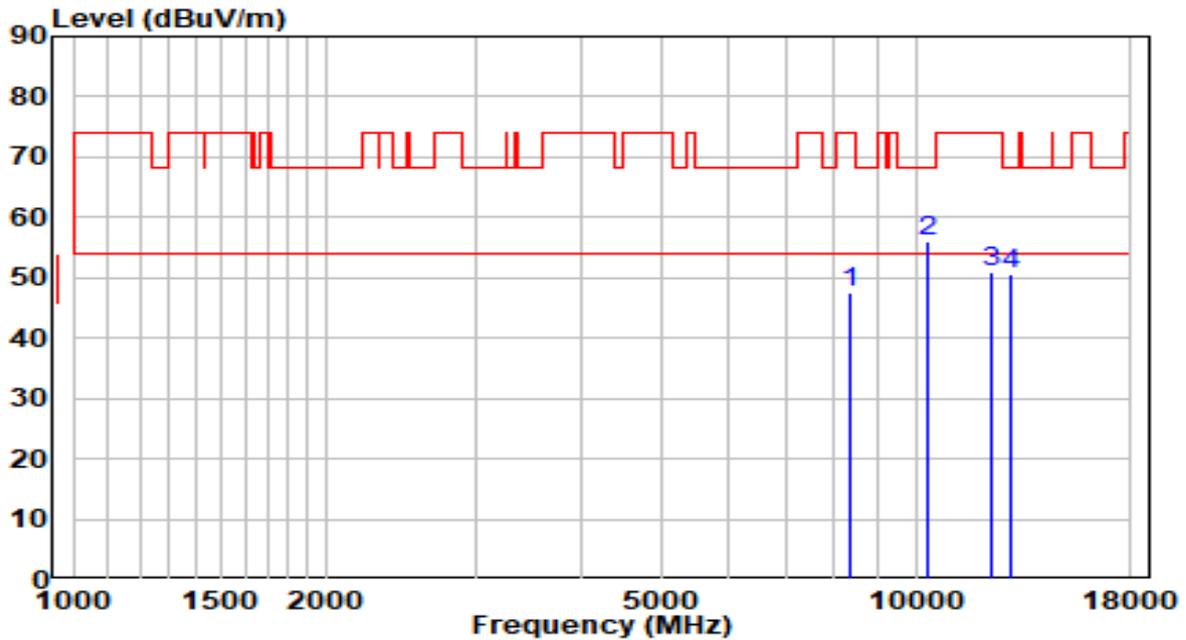


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	35.07	12.48	47.54	-26.46	74.00	Peak
2	* 10367.000	39.41	16.62	56.03	-12.17	68.20	Peak
3	12305.000	33.14	17.87	51.01	-22.99	74.00	Peak
4	12968.000	31.50	19.20	50.70	-17.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

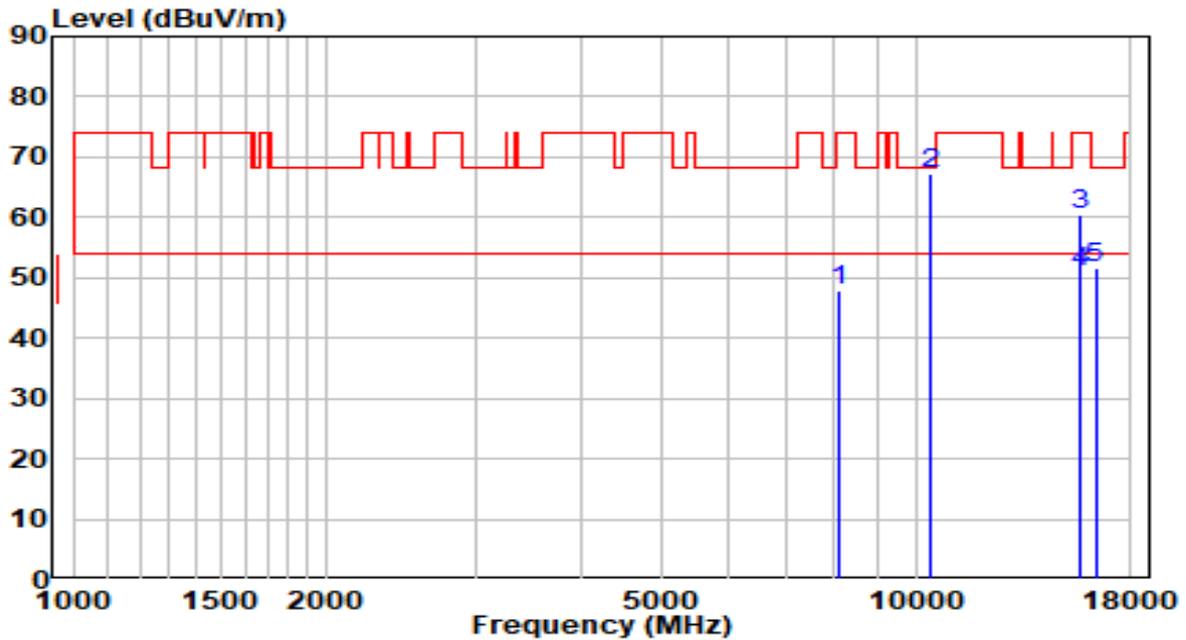


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8106.000	35.31	12.51	47.82	-26.18	74.00	Peak
2	* 10435.000	50.33	16.85	67.18	-1.02	68.20	Peak
3	15654.000	39.29	21.19	60.48	-13.52	74.00	Peak
4	15656.400	29.91	21.19	51.09	-2.91	54.00	Average
5	16334.000	29.97	21.51	51.48	-16.72	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

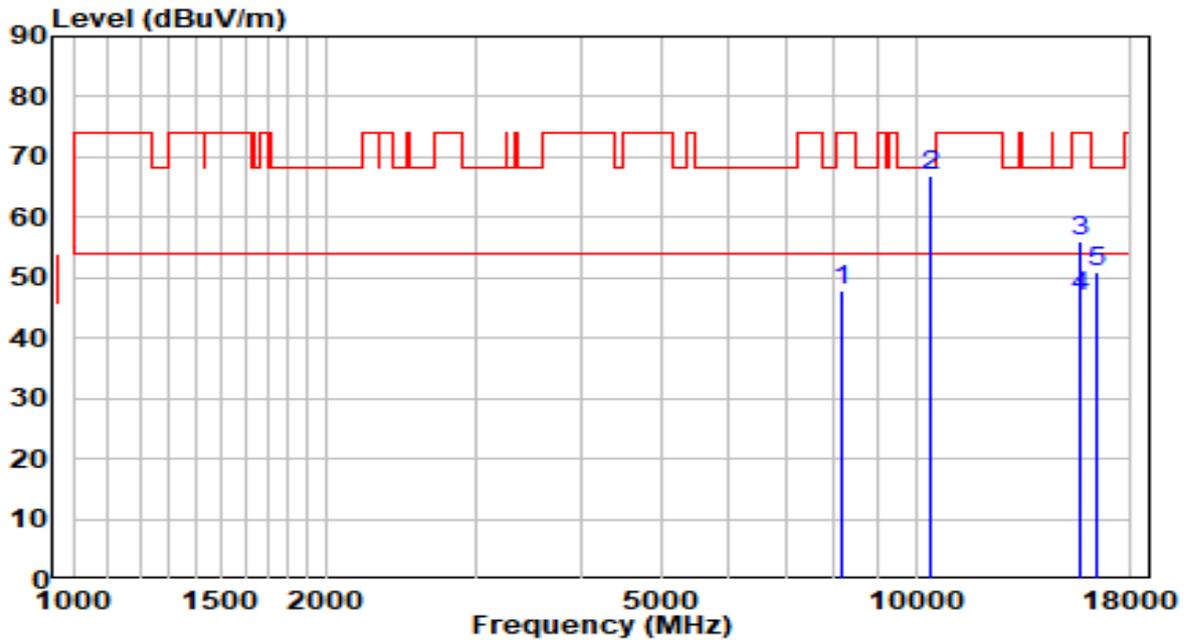


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8157.000	35.45	12.51	47.96	-26.04	74.00	Peak
2	* 10435.000	50.18	16.85	67.03	-1.17	68.20	Peak
3	15654.000	34.89	21.19	56.08	-17.92	74.00	Peak
4	15659.650	25.71	21.18	46.89	-7.11	54.00	Average
5	16402.000	29.25	21.70	50.94	-17.26	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

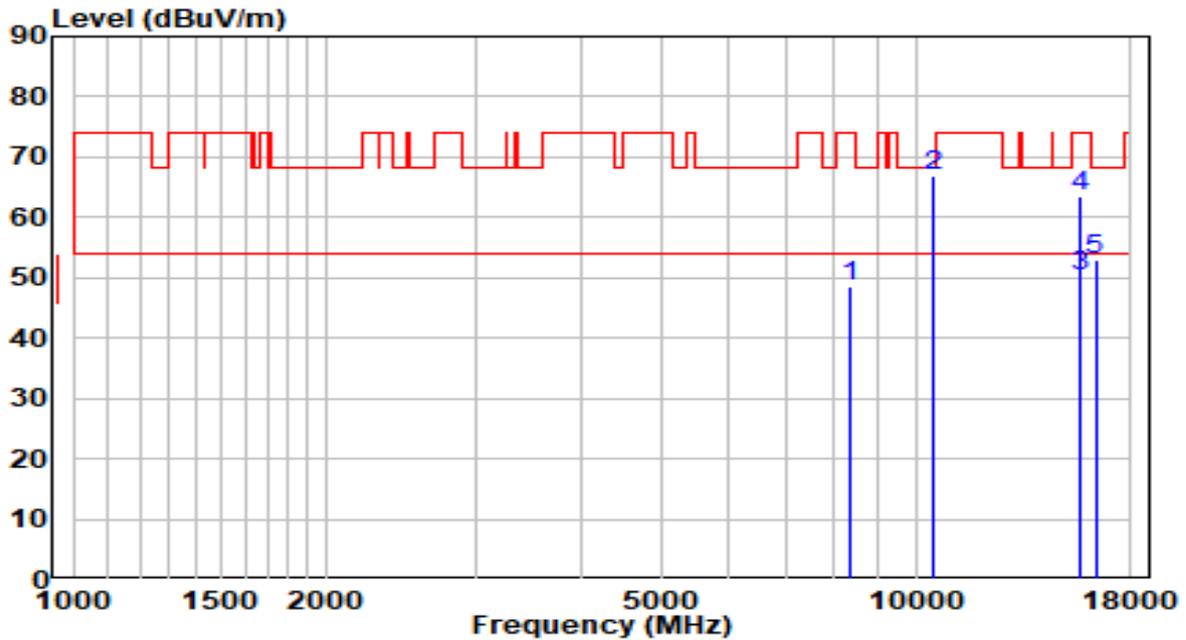


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	36.21	12.48	48.69	-25.31	74.00	Peak
2	* 10486.000	49.73	17.02	66.76	-1.44	68.20	Peak
3	15719.000	29.35	21.08	50.43	-3.57	54.00	Average
4	15722.000	42.60	21.08	63.68	-10.32	74.00	Peak
5	16334.000	31.35	21.51	52.86	-15.34	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

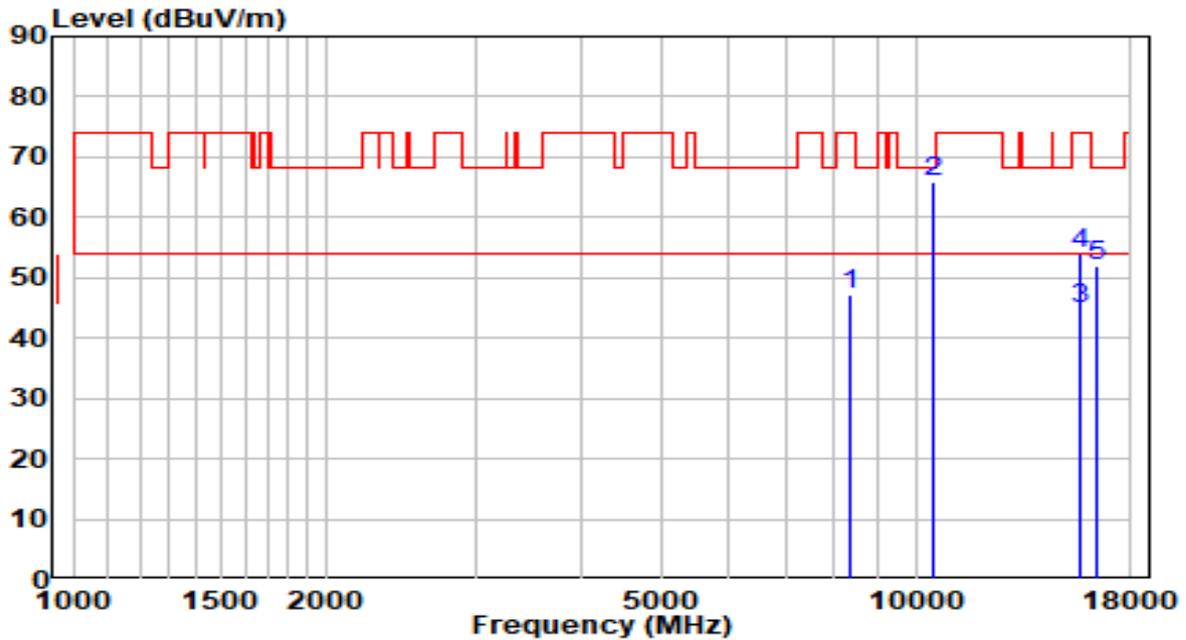


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8378.000	34.61	12.47	47.08	-26.92	74.00	Peak
2	* 10486.000	48.82	17.02	65.84	-2.36	68.20	Peak
3	15715.750	23.66	21.09	44.74	-9.26	54.00	Average
4	15722.000	32.77	21.08	53.85	-20.15	74.00	Peak
5	16419.000	30.22	21.74	51.96	-16.24	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

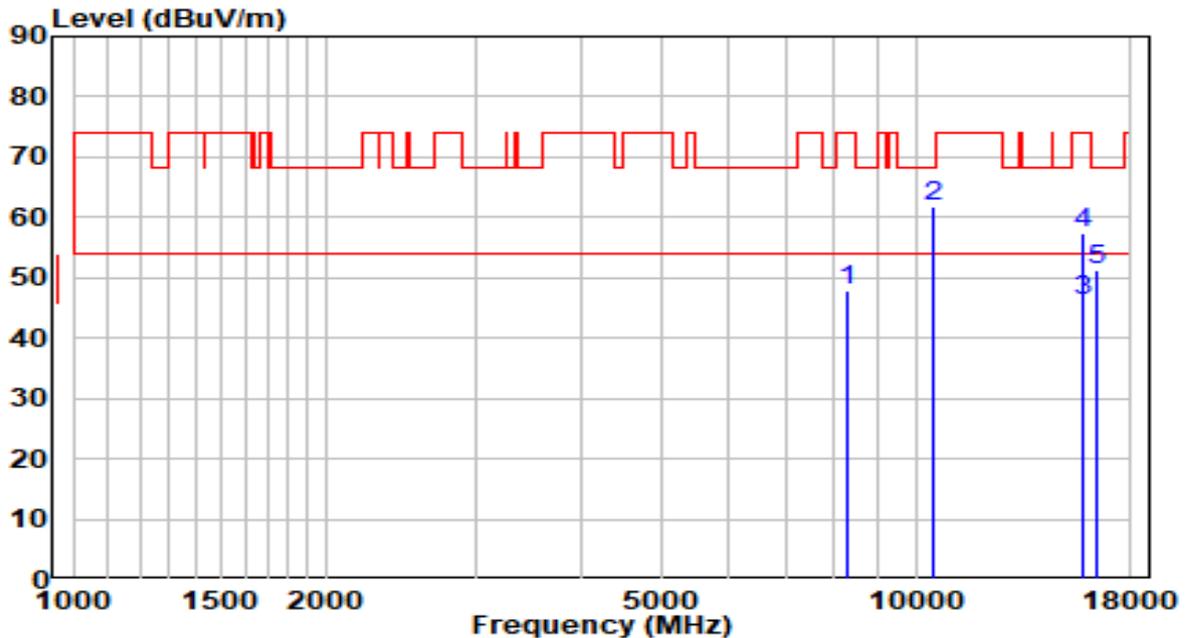


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8276.000	35.38	12.49	47.87	-26.13	74.00	Peak
2	* 10520.000	44.74	17.10	61.84	-6.36	68.20	Peak
3	15779.700	25.27	20.98	46.25	-7.75	54.00	Average
4	15790.000	36.54	20.96	57.51	-16.49	74.00	Peak
5	16453.000	29.54	21.83	51.37	-16.83	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

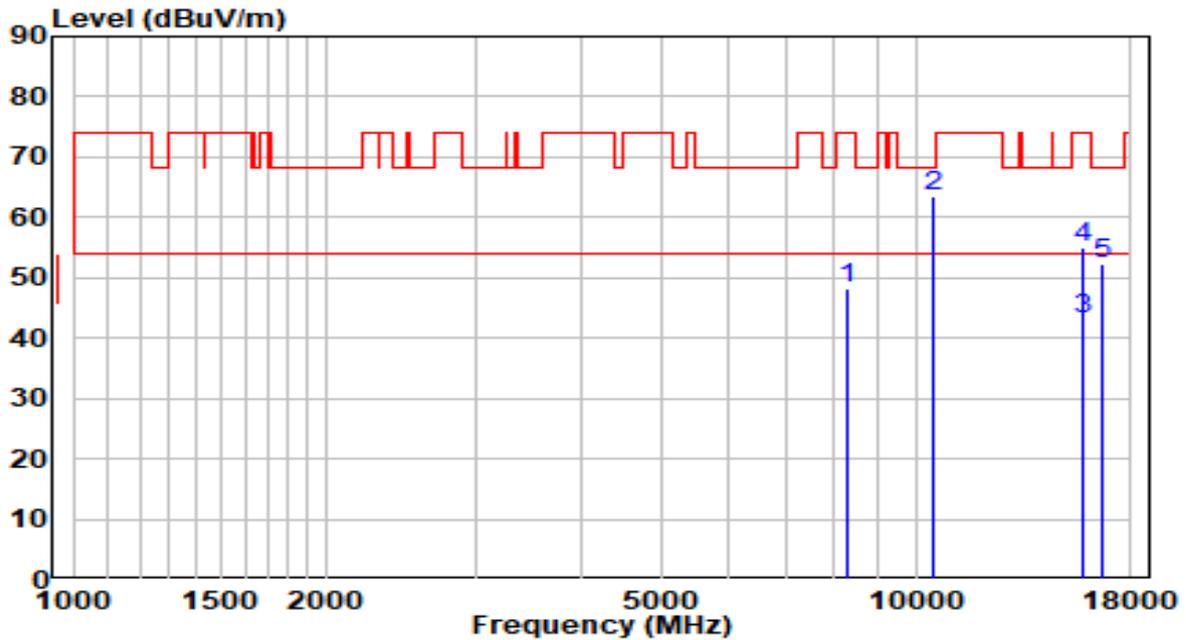


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	35.87	12.48	48.36	-25.64	74.00	Peak
2	* 10520.000	46.33	17.10	63.43	-4.77	68.20	Peak
3	15784.600	22.28	20.97	43.26	-10.74	54.00	Average
4	15790.000	34.08	20.96	55.04	-18.96	74.00	Peak
5	16589.000	29.55	22.61	52.16	-16.04	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

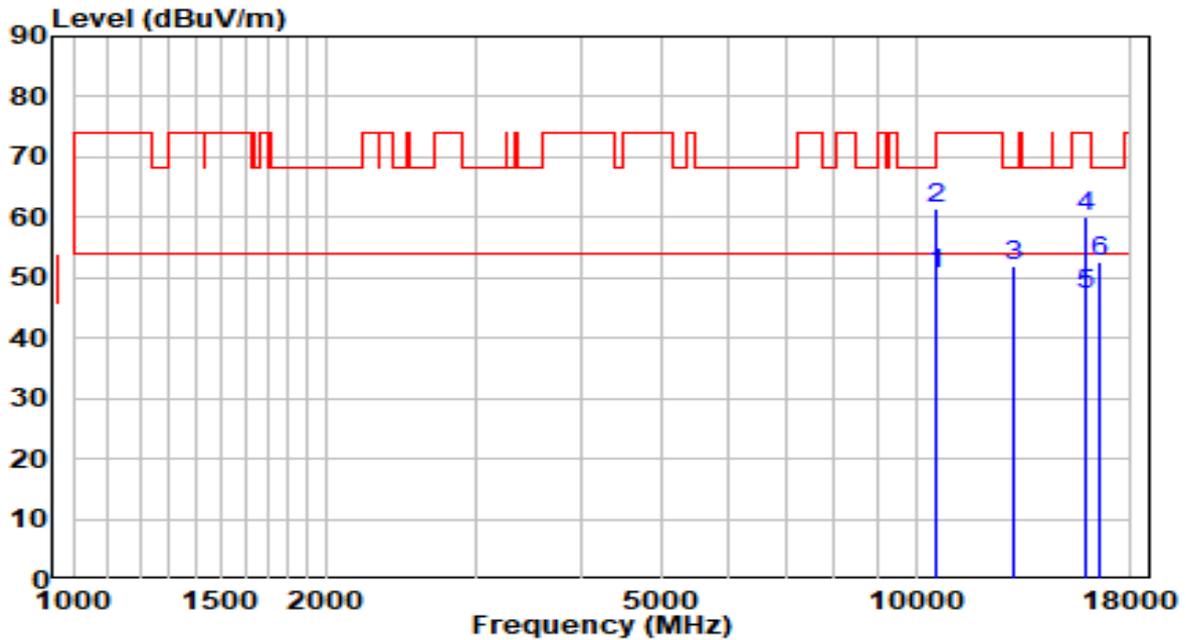


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 10601.200	33.22	17.21	50.43	-3.57	54.00	Average
2	10605.000	44.12	17.22	61.34	-12.66	74.00	Peak
3	13070.000	32.51	19.47	51.98	-16.22	68.20	Peak
4	15892.000	39.45	20.79	60.24	-13.76	74.00	Peak
5	15903.700	26.30	20.77	47.07	-6.93	54.00	Average
6	16487.000	30.80	21.92	52.73	-15.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

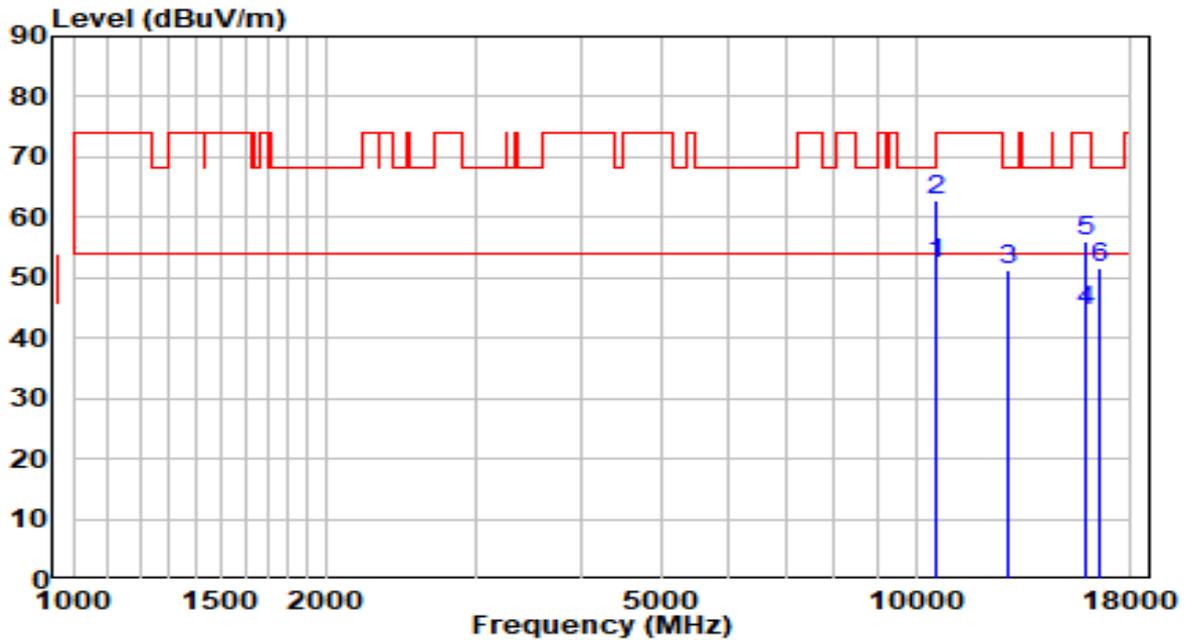


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 10600.000	35.06	17.21	52.27	-1.73	54.00	Average
2	10605.000	45.46	17.22	62.68	-11.32	74.00	Peak
3	12849.000	32.55	18.87	51.43	-16.77	68.20	Peak
4	15894.600	23.76	20.79	44.55	-9.45	54.00	Average
5	15909.000	35.18	20.76	55.94	-18.06	74.00	Peak
6	16470.000	29.75	21.88	51.63	-16.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

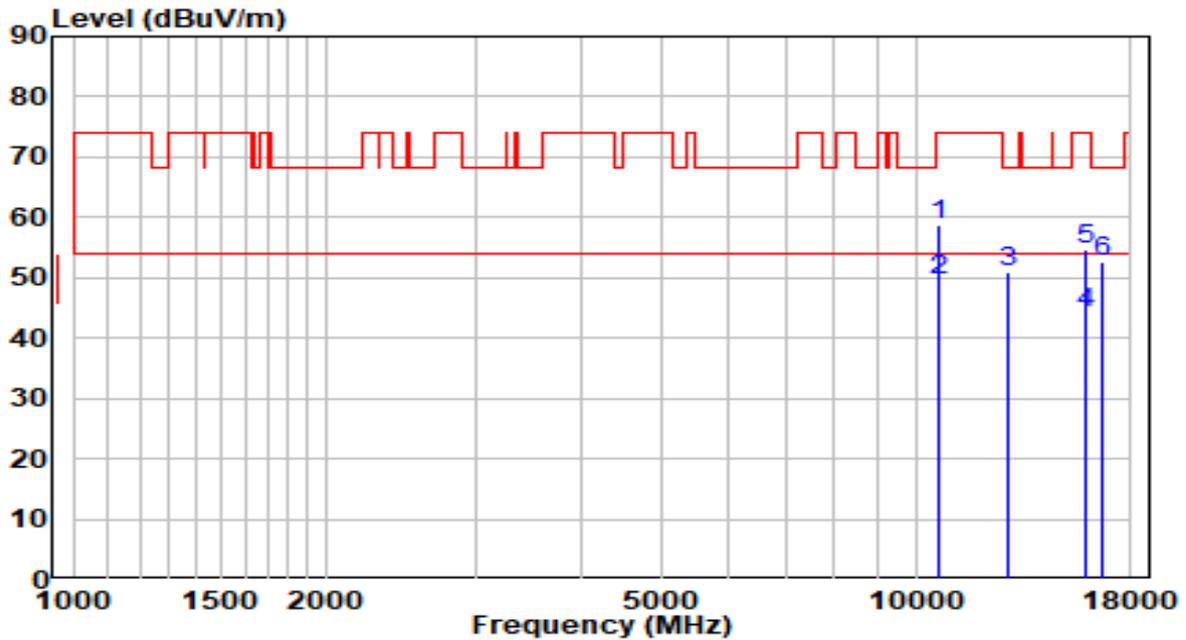


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10639.000	41.54	17.27	58.81	-15.19	74.00	Peak
2	* 10641.000	32.46	17.27	49.73	-4.27	54.00	Average
3	12866.000	32.11	18.92	51.02	-17.18	68.20	Peak
4	15956.300	23.47	20.68	44.15	-9.85	54.00	Average
5	15960.000	34.13	20.68	54.81	-19.19	74.00	Peak
6	16606.000	29.76	22.73	52.49	-15.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

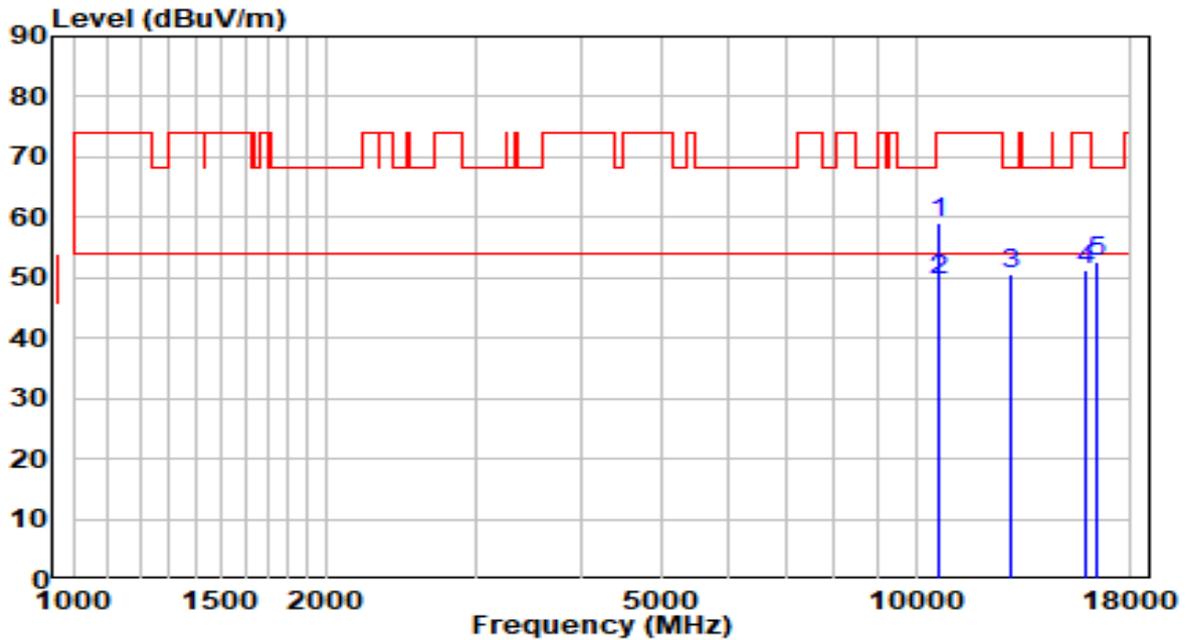


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10622.000	41.83	17.24	59.08	-14.92	74.00	Peak
2	* 10638.450	32.35	17.27	49.62	-4.38	54.00	Average
3	12968.000	31.30	19.20	50.50	-17.70	68.20	Peak
4	15943.000	30.67	20.71	51.38	-22.62	74.00	Peak
5	16351.000	31.04	21.56	52.59	-15.61	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

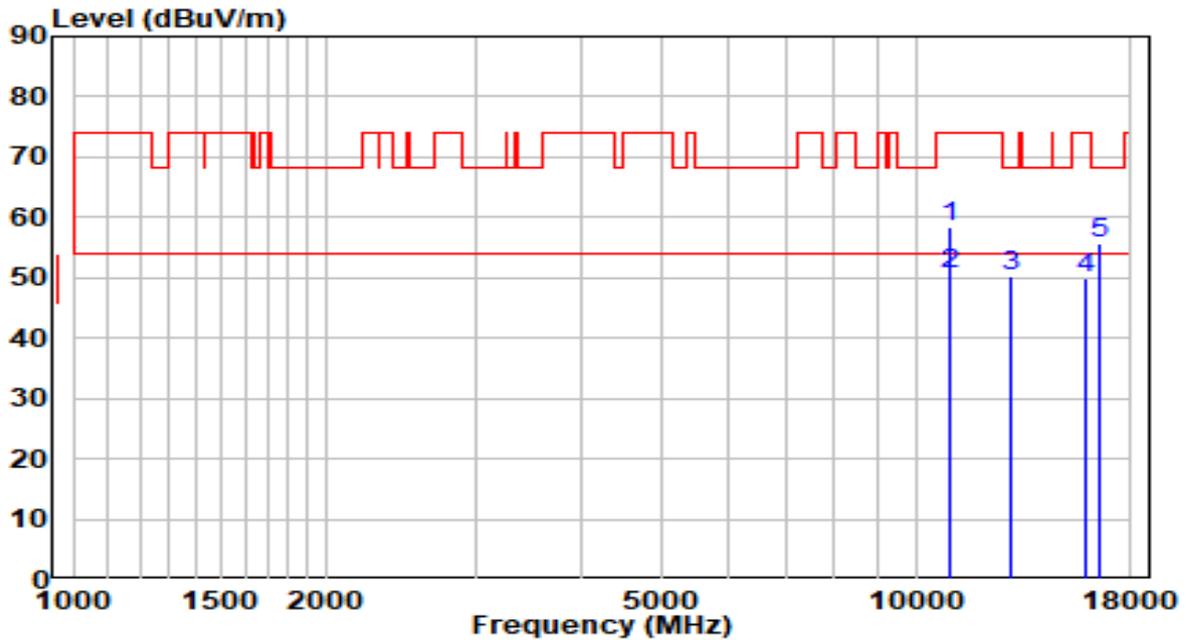


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10996.000	40.66	17.77	58.43	-15.57	74.00	Peak
2	* 11000.000	32.66	17.78	50.44	-3.56	54.00	Average
3	13002.000	31.05	19.30	50.35	-17.85	68.20	Peak
4	15875.000	29.07	20.82	49.89	-24.11	74.00	Peak
5	16487.000	33.71	21.92	55.63	-12.57	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

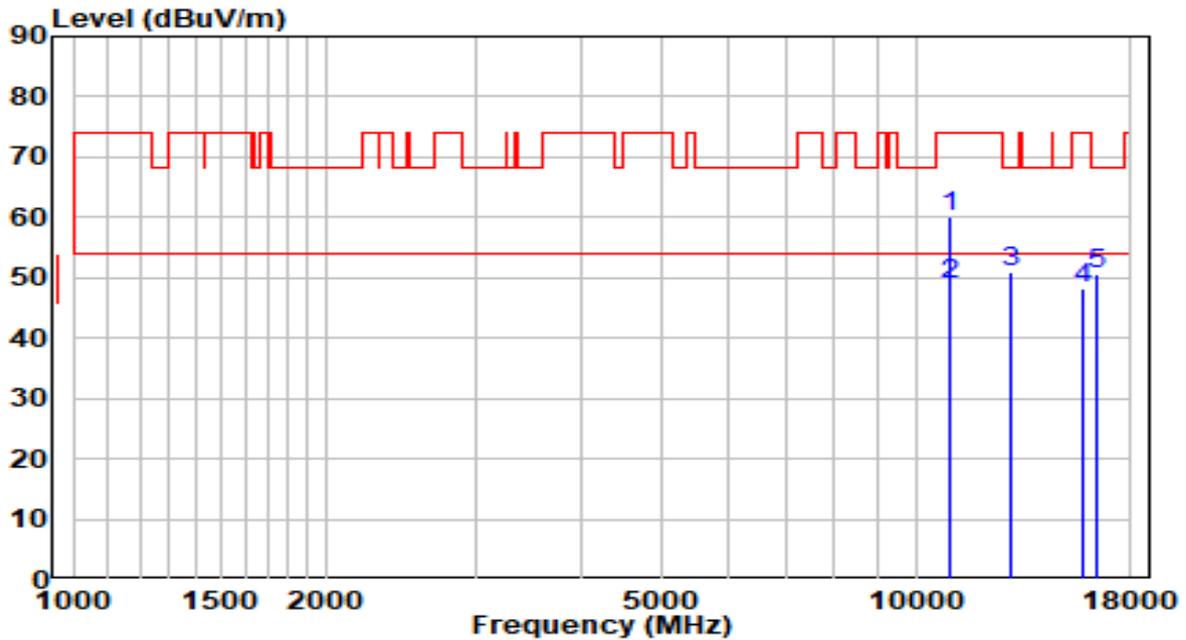


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10996.000	42.51	17.77	60.28	-13.72	74.00	Peak
2	* 11000.000	31.07	17.78	48.85	-5.15	54.00	Average
3	12951.000	31.76	19.15	50.91	-17.29	68.20	Peak
4	15773.000	27.13	20.99	48.12	-25.88	74.00	Peak
5	16351.000	28.94	21.56	50.50	-17.70	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

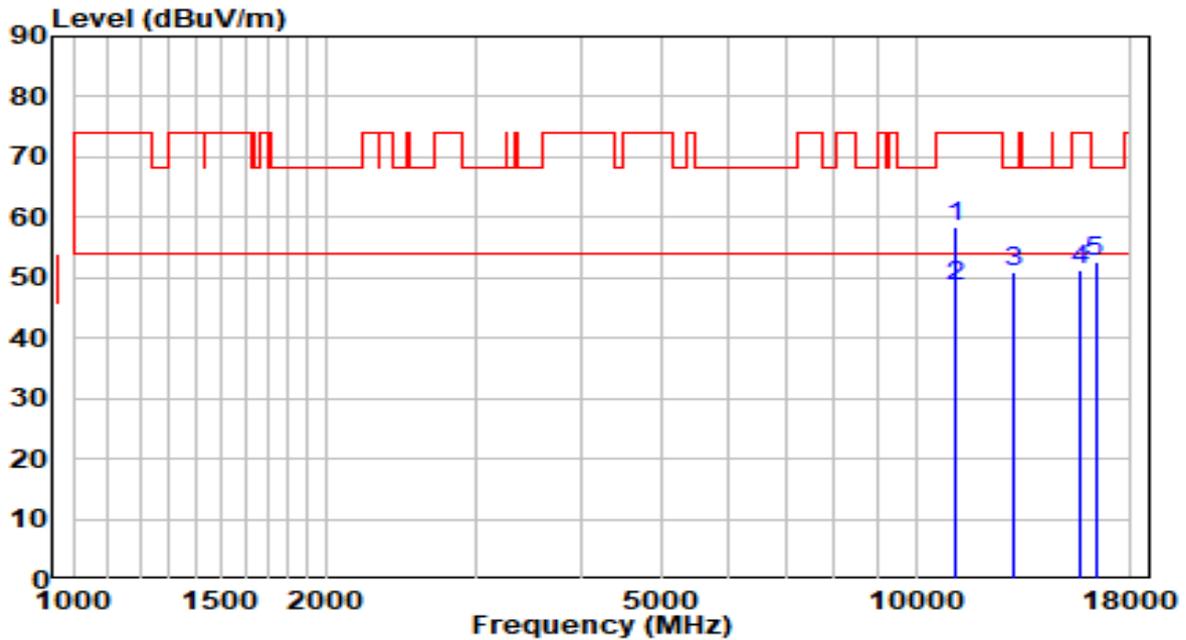


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11149.000	40.28	17.98	58.26	-15.74	74.00	Peak
2	* 11157.500	30.54	17.99	48.53	-5.47	54.00	Average
3	13087.000	31.42	19.51	50.93	-17.27	68.20	Peak
4	15637.000	30.04	21.22	51.26	-22.74	74.00	Peak
5	16334.000	31.22	21.51	52.73	-15.47	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

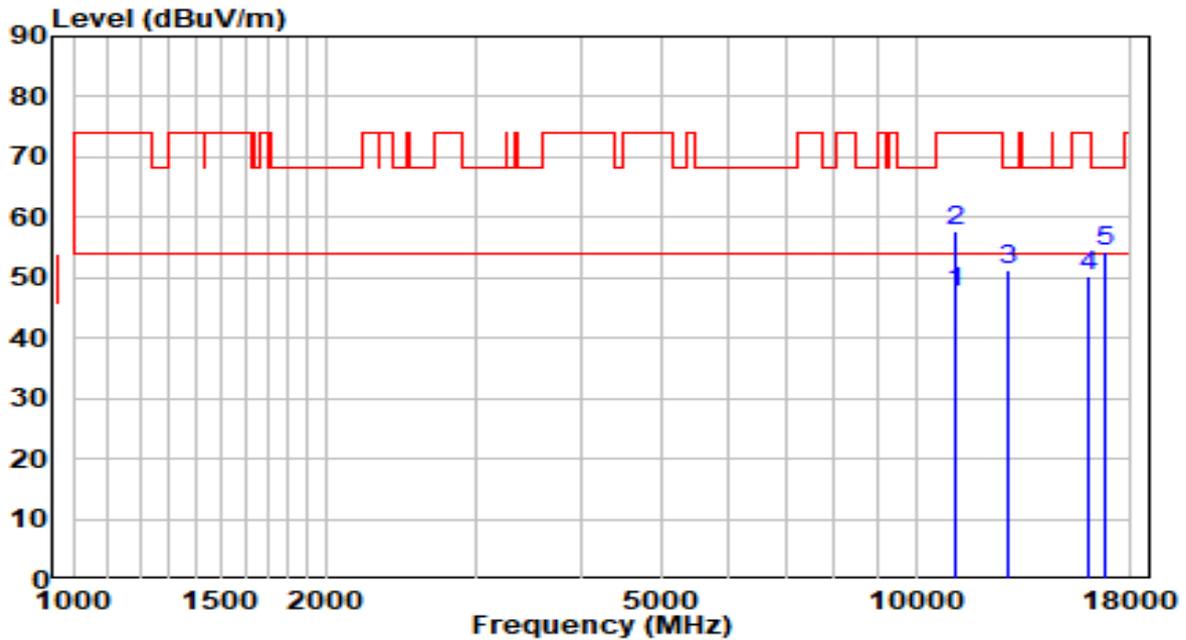


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 11159.700	29.53	17.99	47.52	-6.48	54.00	Average
2	11166.000	39.71	18.00	57.71	-16.29	74.00	Peak
3	12832.000	32.55	18.82	51.37	-16.83	68.20	Peak
4	16011.000	29.72	20.64	50.36	-23.64	74.00	Peak
5	16759.000	30.51	23.85	54.36	-13.84	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

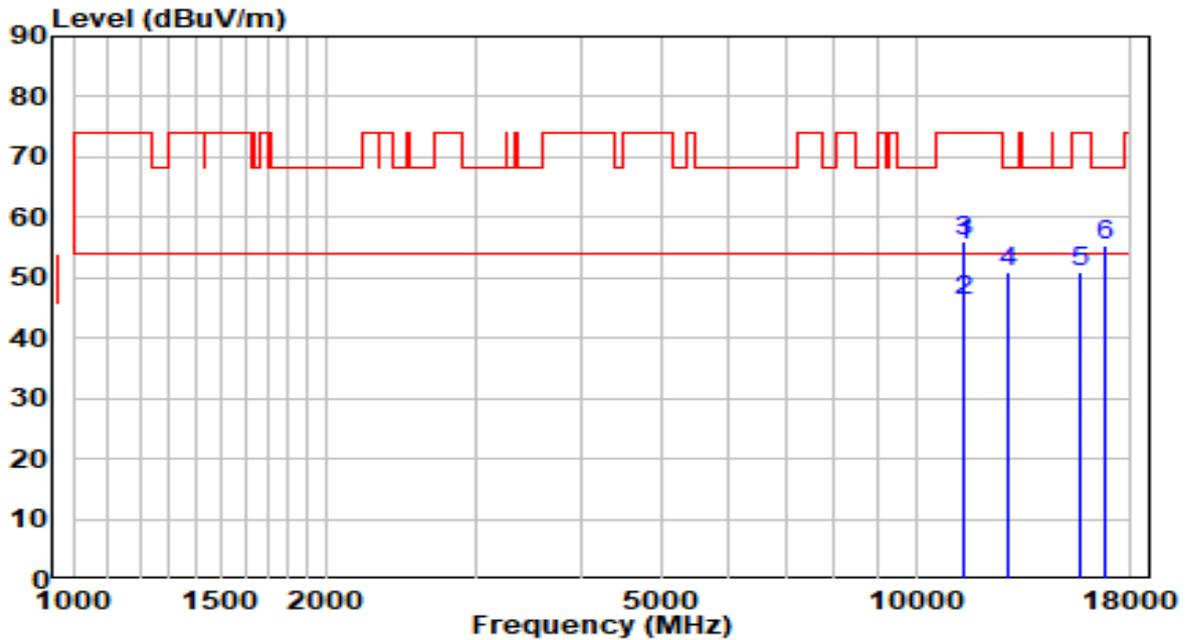


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11400.000	37.12	18.32	55.44	-18.56	74.00	Peak
2	* 11400.150	27.84	18.32	46.16	-7.84	54.00	Average
3	11404.000	37.88	18.32	56.21	-17.79	74.00	Peak
4	12849.000	32.18	18.87	51.05	-17.15	68.20	Peak
5	15654.000	29.84	21.19	51.03	-22.97	74.00	Peak
6	16759.000	31.59	23.85	55.44	-12.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

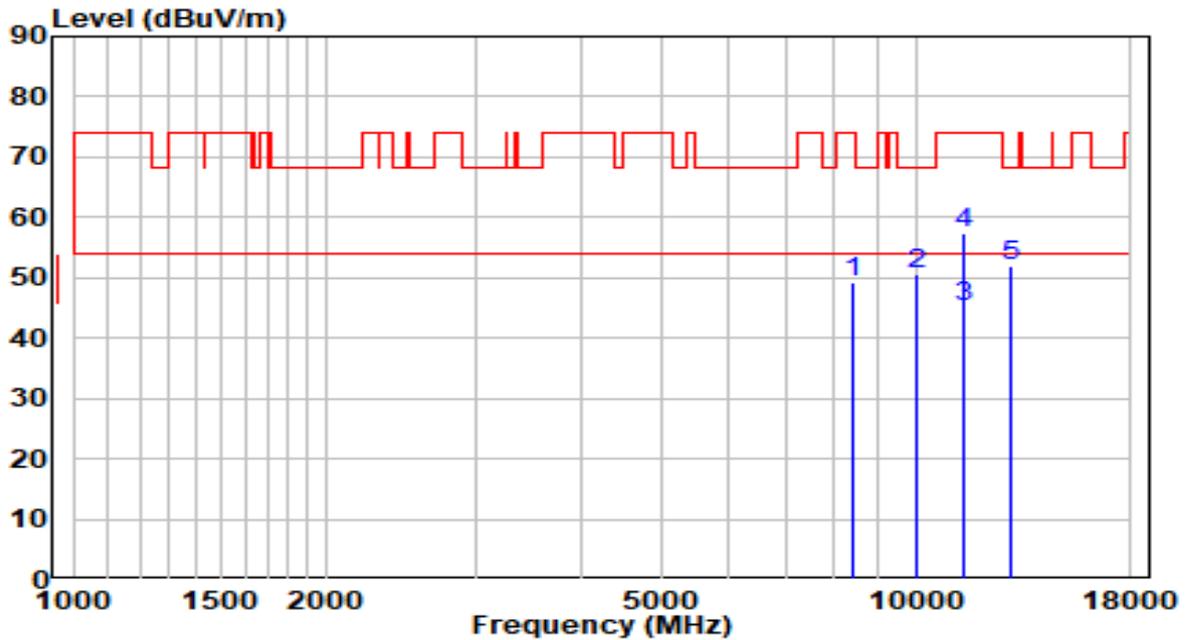


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8412.000	36.69	12.47	49.16	-24.84	74.00	Peak
2	10027.000	35.20	15.45	50.65	-17.55	68.20	Peak
3	* 11400.000	26.79	18.32	45.10	-8.90	54.00	Average
4	11404.000	39.11	18.32	57.43	-16.57	74.00	Peak
5	12951.000	32.94	19.15	52.10	-16.10	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

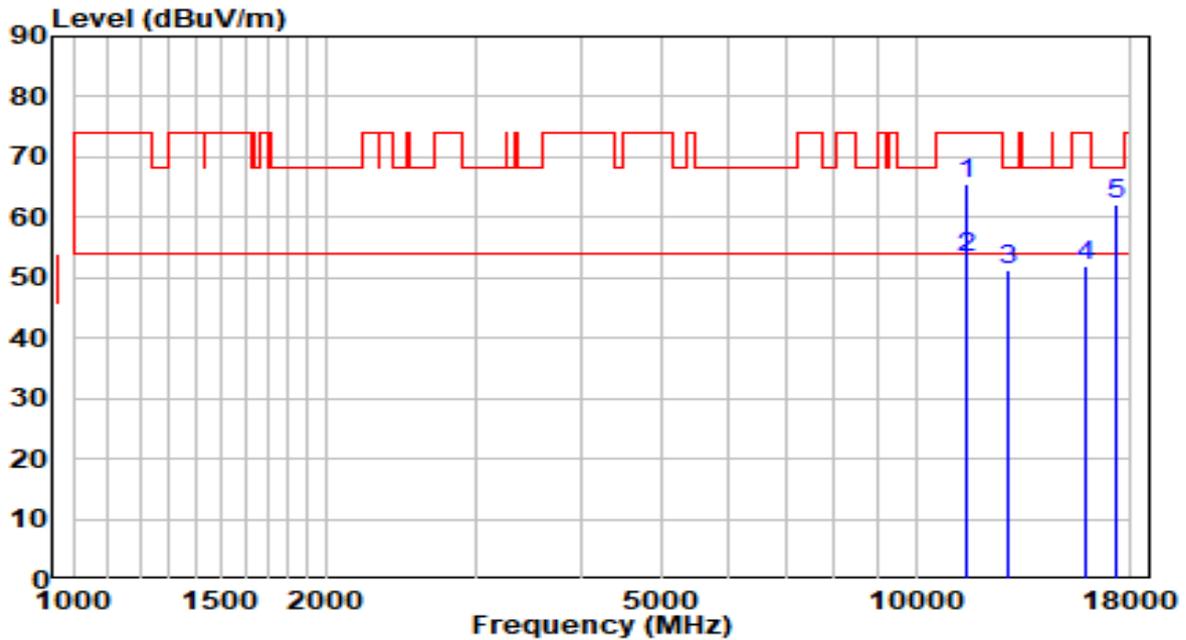


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11489.000	47.04	18.44	65.48	-8.52	74.00	Peak
2	* 11489.850	34.76	18.44	53.20	-0.80	54.00	Average
3	12832.000	32.47	18.82	51.29	-16.91	68.20	Peak
4	15926.000	31.22	20.73	51.95	-22.05	74.00	Peak
5	17252.000	34.01	28.15	62.16	-6.04	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

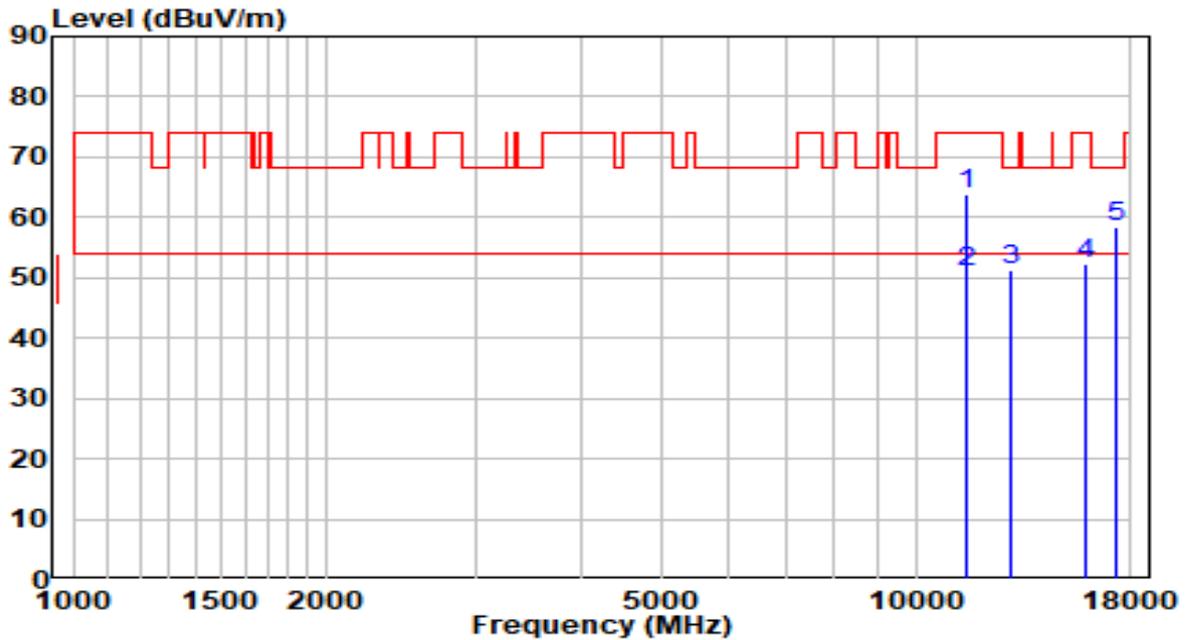


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11489.000	45.38	18.44	63.82	-10.18	74.00	Peak
2	* 11490.000	32.59	18.44	51.02	-2.98	54.00	Average
3	12985.000	31.92	19.25	51.17	-17.03	68.20	Peak
4	15909.000	31.54	20.76	52.30	-21.70	74.00	Peak
5	17235.000	30.55	27.97	58.52	-9.68	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

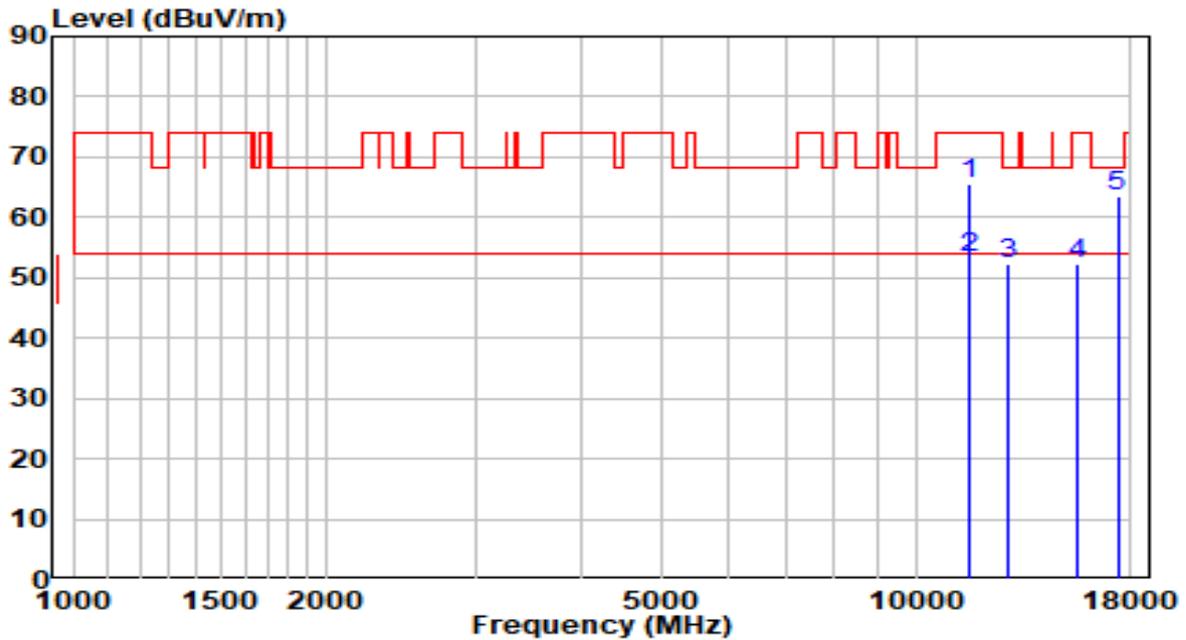


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11557.000	47.03	18.38	65.41	-8.59	74.00	Peak
2	* 11570.150	34.83	18.36	53.19	-0.81	54.00	Average
3	12849.000	33.27	18.87	52.14	-16.06	68.20	Peak
4	15552.000	31.02	21.36	52.38	-21.62	74.00	Peak
5	17354.000	34.26	29.17	63.44	-4.76	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

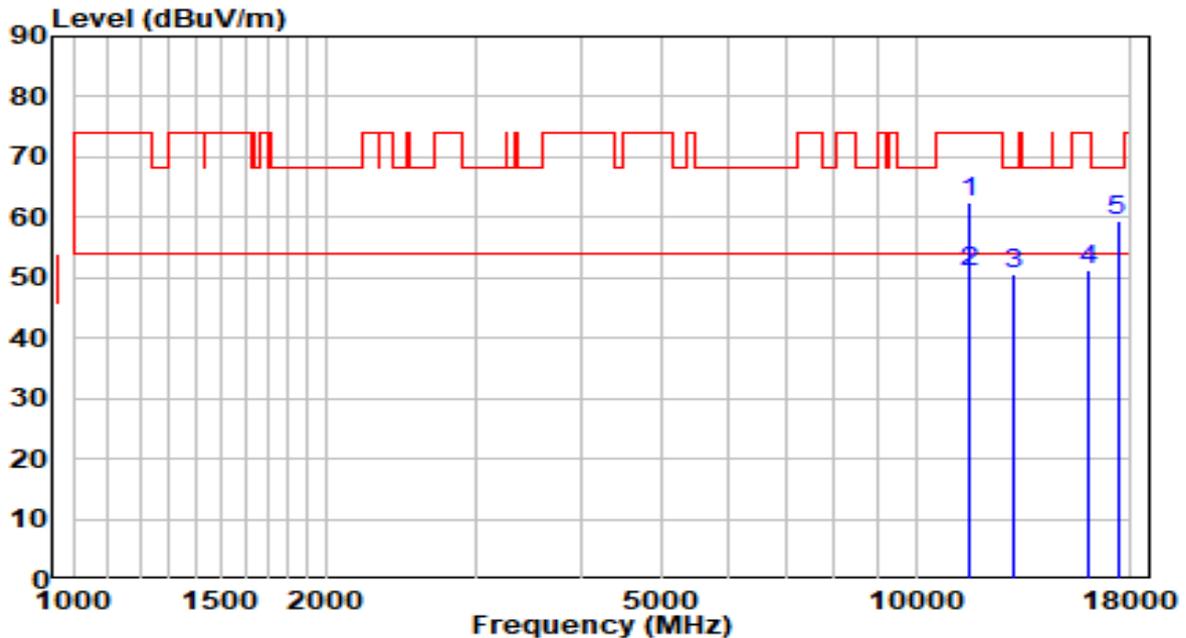


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11557.000	44.14	18.38	62.52	-11.48	74.00	Peak
2	* 11570.400	32.56	18.36	50.93	-3.07	54.00	Average
3	13036.000	31.35	19.38	50.73	-17.47	68.20	Peak
4	15977.000	30.47	20.65	51.12	-22.88	74.00	Peak
5	17354.000	30.10	29.17	59.27	-8.93	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

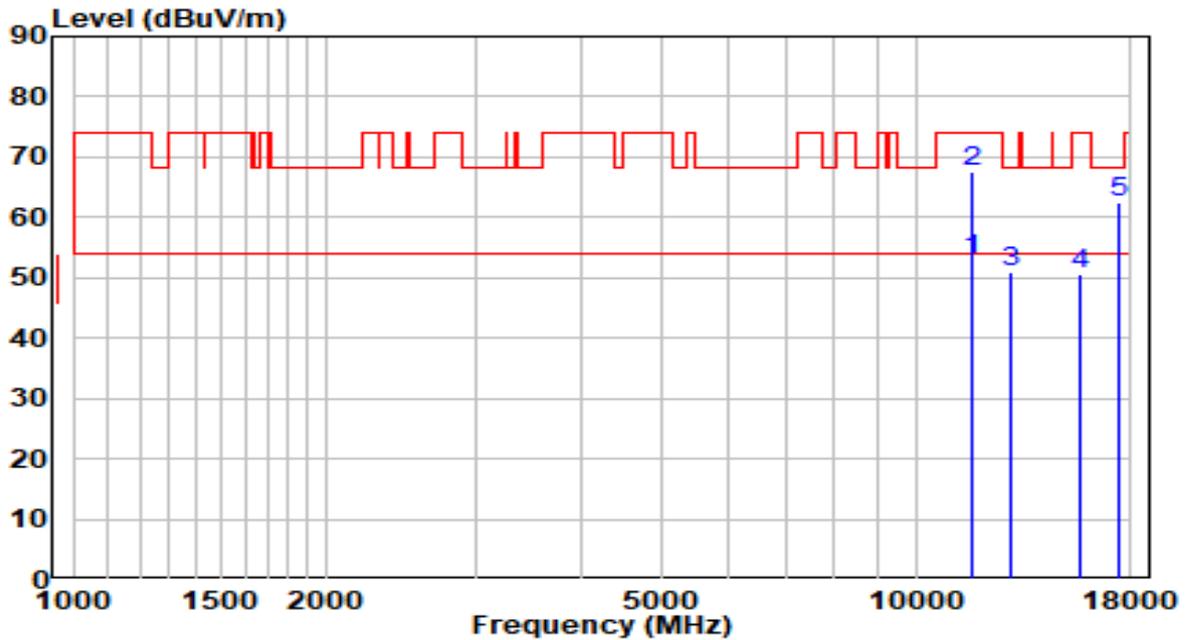


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 11655.150	34.75	18.25	53.00	-1.00	54.00	Average
2	11659.000	49.18	18.25	67.43	-6.57	74.00	Peak
3	13002.000	31.51	19.30	50.80	-17.40	68.20	Peak
4	15688.000	29.49	21.13	50.63	-23.37	74.00	Peak
5	17473.000	32.02	30.37	62.39	-5.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.9°C/40.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

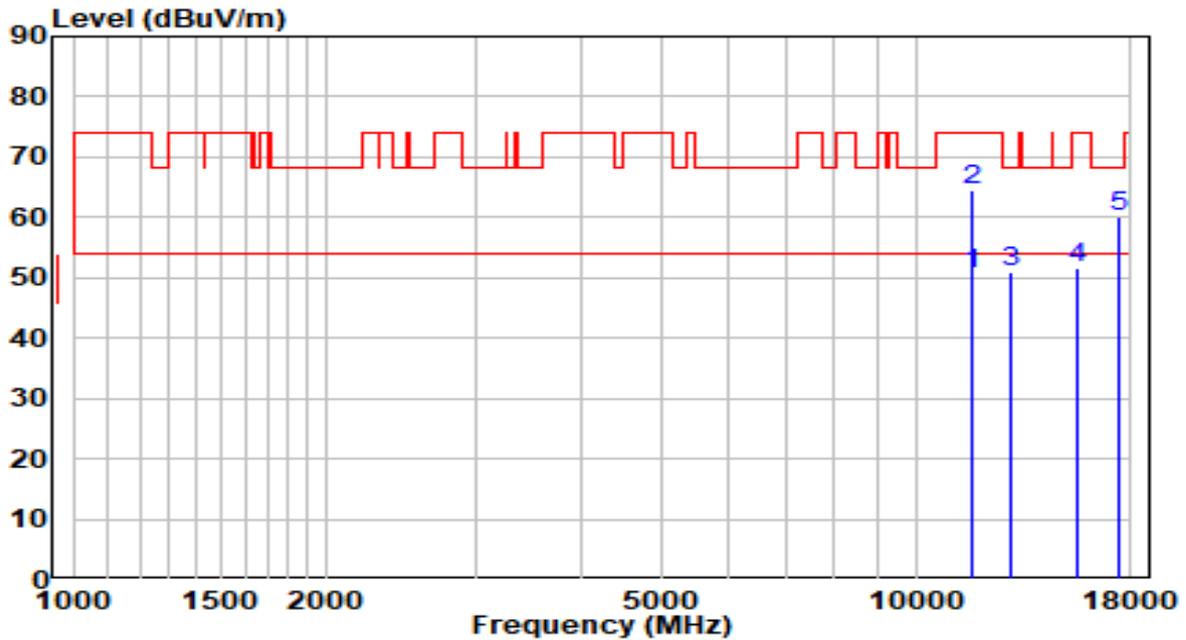


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 11650.300	32.31	18.26	50.57	-3.43	54.00	Average
2	11659.000	46.24	18.25	64.49	-9.51	74.00	Peak
3	13002.000	31.55	19.30	50.84	-17.36	68.20	Peak
4	15518.000	30.22	21.42	51.64	-22.36	74.00	Peak
5	17473.000	29.79	30.37	60.16	-8.04	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

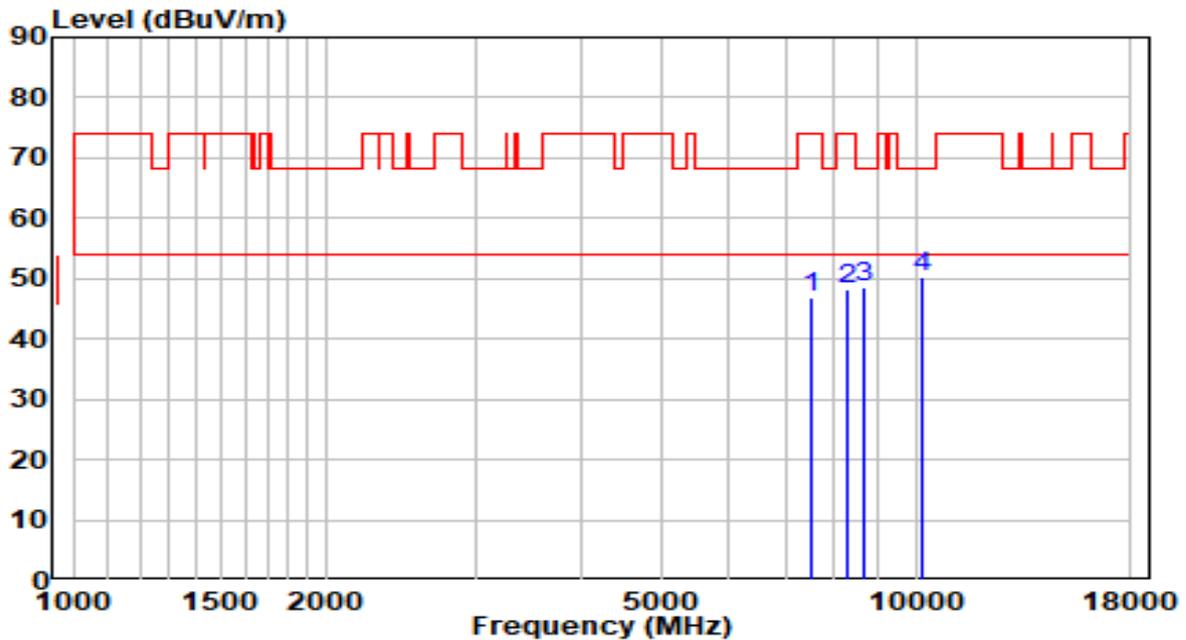


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	35.15	11.73	46.89	-27.11	74.00	Peak
2	8293.000	35.75	12.49	48.23	-25.77	74.00	Peak
3	8701.000	35.57	12.95	48.51	-19.69	68.20	Peak
4	* 10163.000	34.42	15.92	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

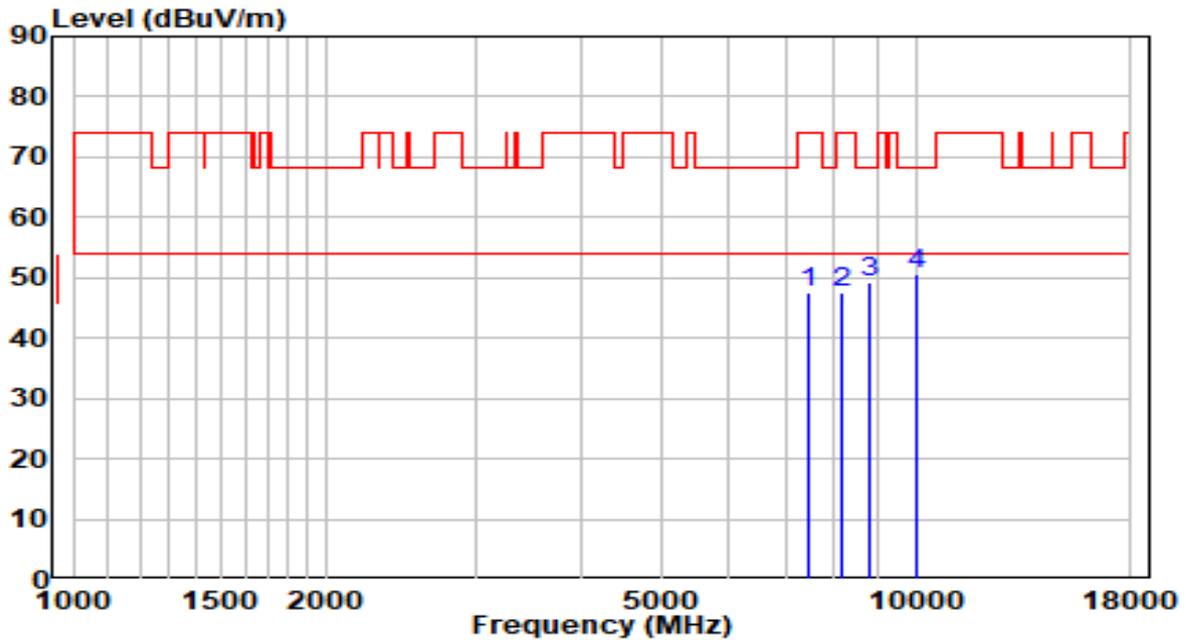


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	36.05	11.60	47.65	-26.35	74.00	Peak
2	8191.000	35.17	12.50	47.67	-26.33	74.00	Peak
3	8837.000	35.98	13.28	49.26	-18.94	68.20	Peak
4	* 9993.000	35.15	15.35	50.50	-17.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

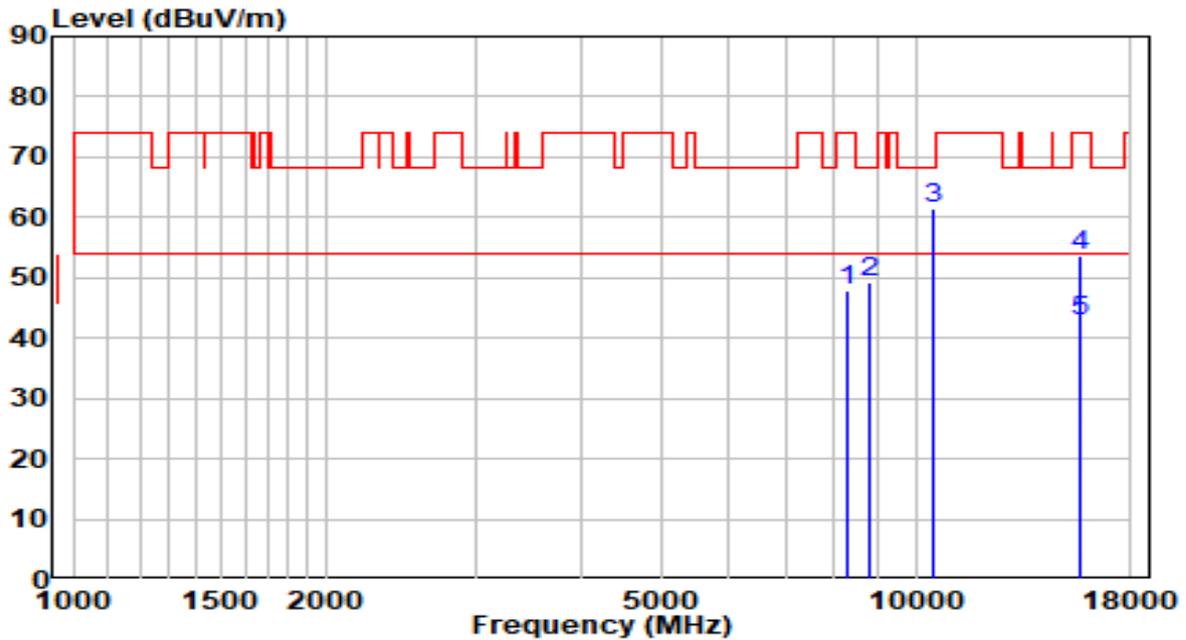


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	35.48	12.49	47.96	-26.04	74.00	Peak
2	8820.000	35.84	13.24	49.08	-19.12	68.20	Peak
3	* 10452.000	44.50	16.91	61.41	-6.79	68.20	Peak
4	15688.000	32.49	21.13	53.62	-20.38	74.00	Peak
5	15688.000	21.61	21.13	42.75	-11.25	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

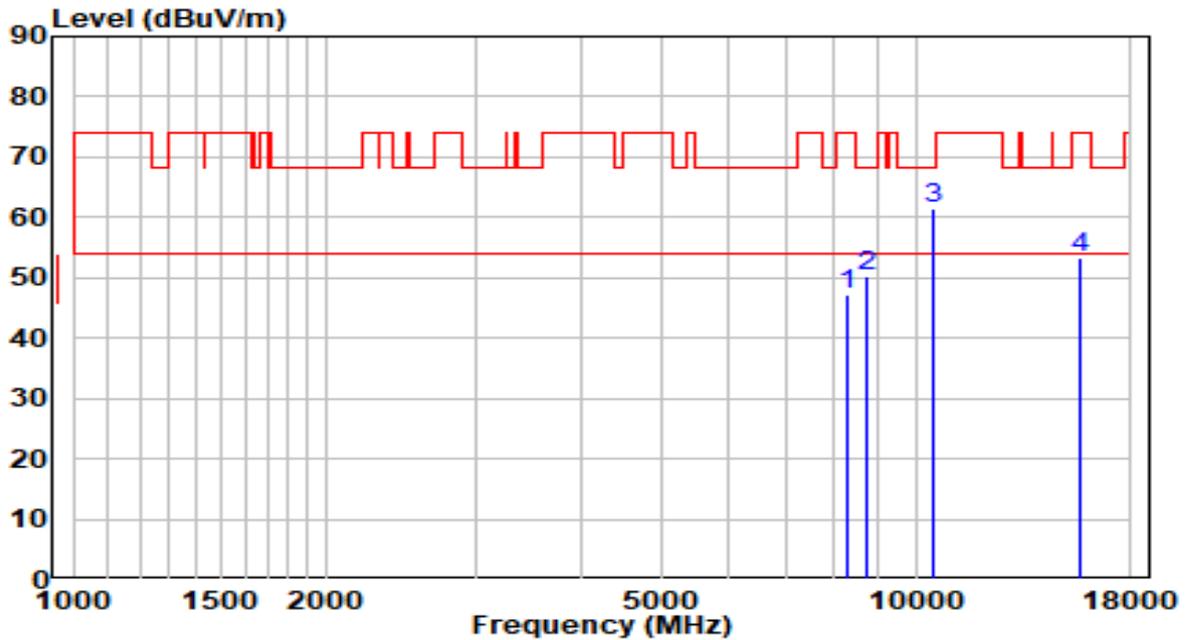


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	34.78	12.49	47.27	-26.73	74.00	Peak
2	8769.000	37.10	13.11	50.22	-17.98	68.20	Peak
3	* 10452.000	44.40	16.91	61.30	-6.90	68.20	Peak
4	15688.000	32.35	21.13	53.49	-20.51	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

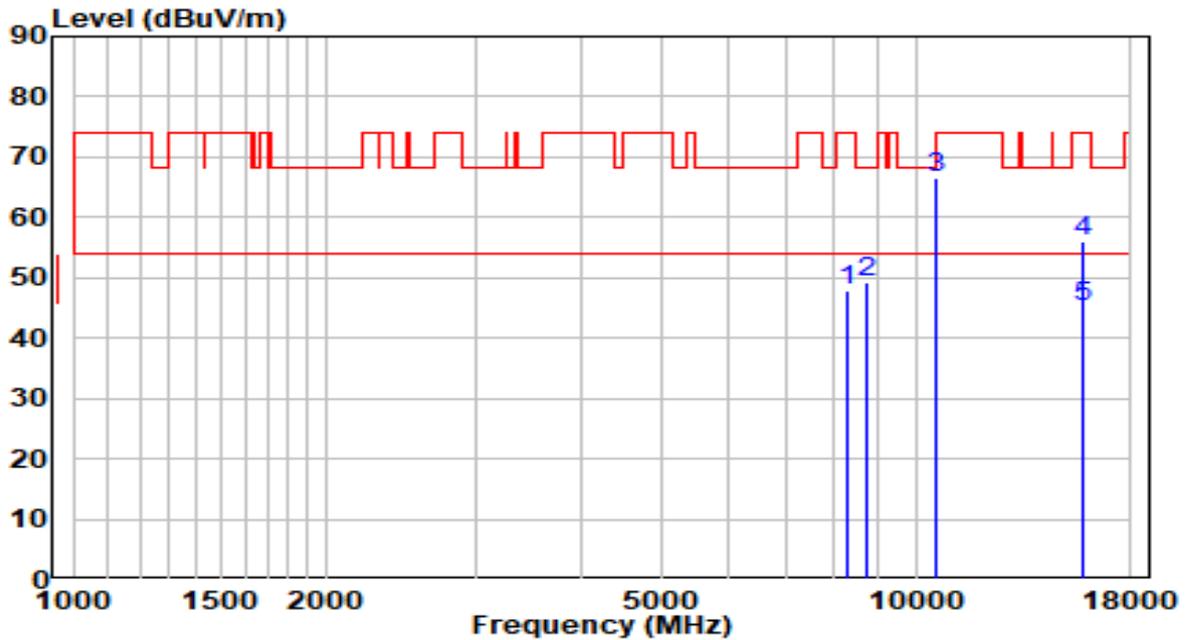


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	35.48	12.48	47.97	-26.03	74.00	Peak
2	8769.000	35.99	13.11	49.10	-19.10	68.20	Peak
3	* 10537.000	49.36	17.12	66.48	-1.72	68.20	Peak
4	15790.000	35.06	20.96	56.03	-17.97	74.00	Peak
5	15790.000	24.07	20.96	45.03	-8.97	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

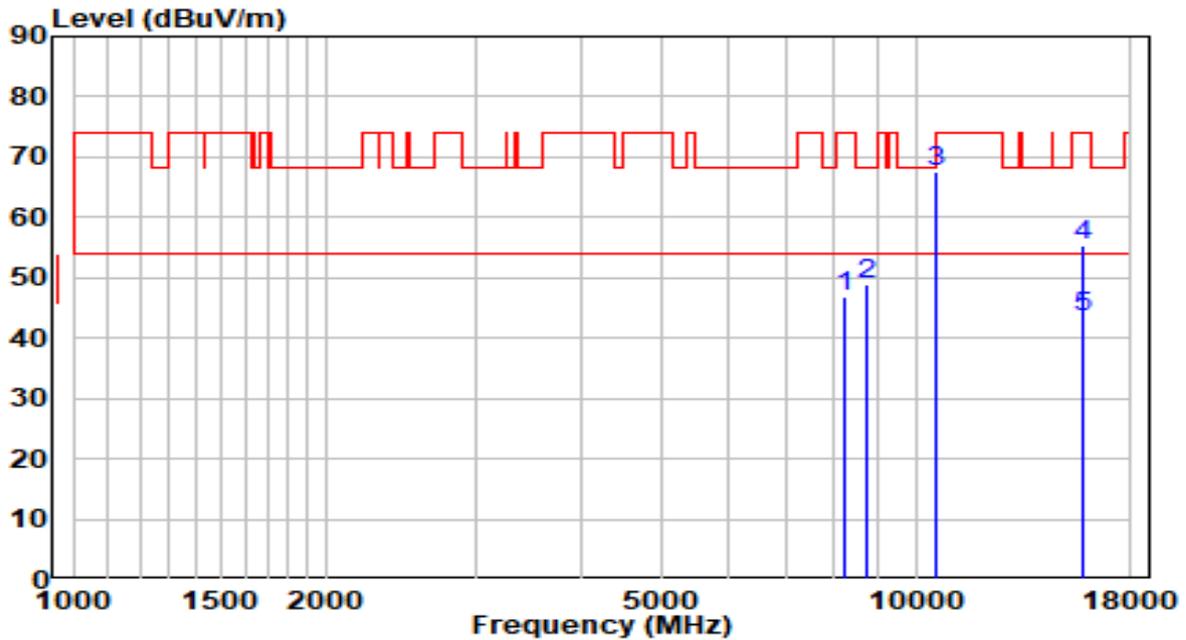


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8242.000	34.27	12.49	46.76	-27.24	74.00	Peak
2	8769.000	35.67	13.11	48.79	-19.41	68.20	Peak
3	* 10554.000	50.47	17.15	67.62	-0.58	68.20	Peak
4	15824.000	34.32	20.91	55.22	-18.78	74.00	Peak
5	15824.000	22.70	20.91	43.61	-10.39	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

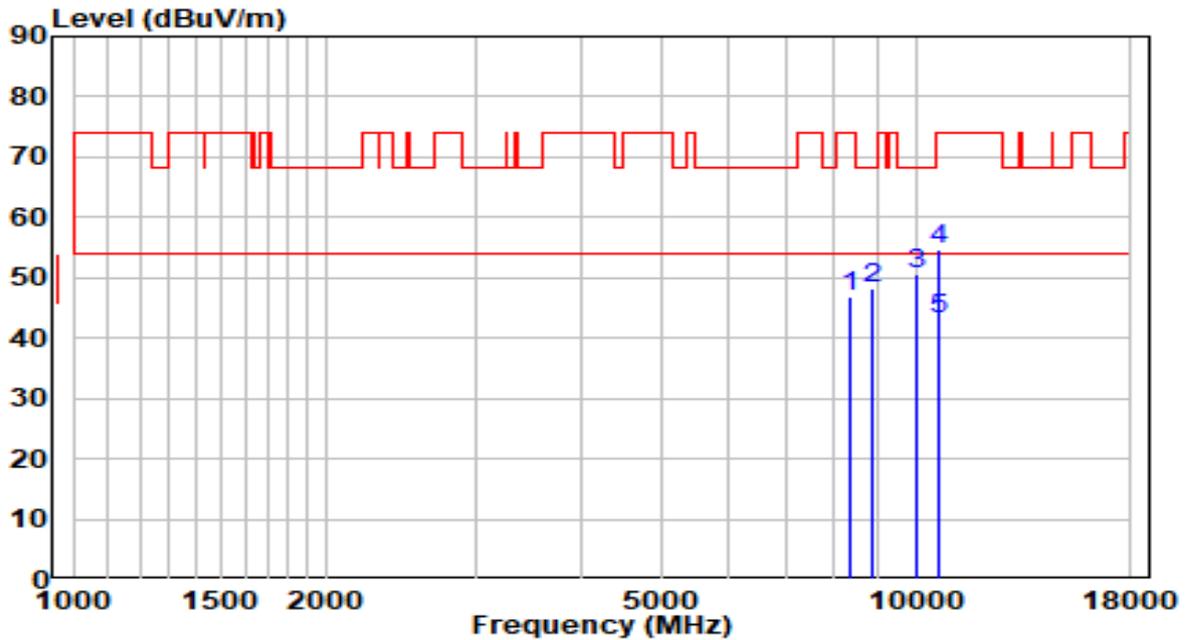


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	34.45	12.48	46.93	-27.07	74.00	Peak
2	8854.000	35.00	13.32	48.33	-19.87	68.20	Peak
3	10027.000	35.20	15.45	50.65	-17.55	68.20	Peak
4	10622.000	37.59	17.24	54.83	-19.17	74.00	Peak
5	* 10622.000	25.92	17.24	43.17	-10.83	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

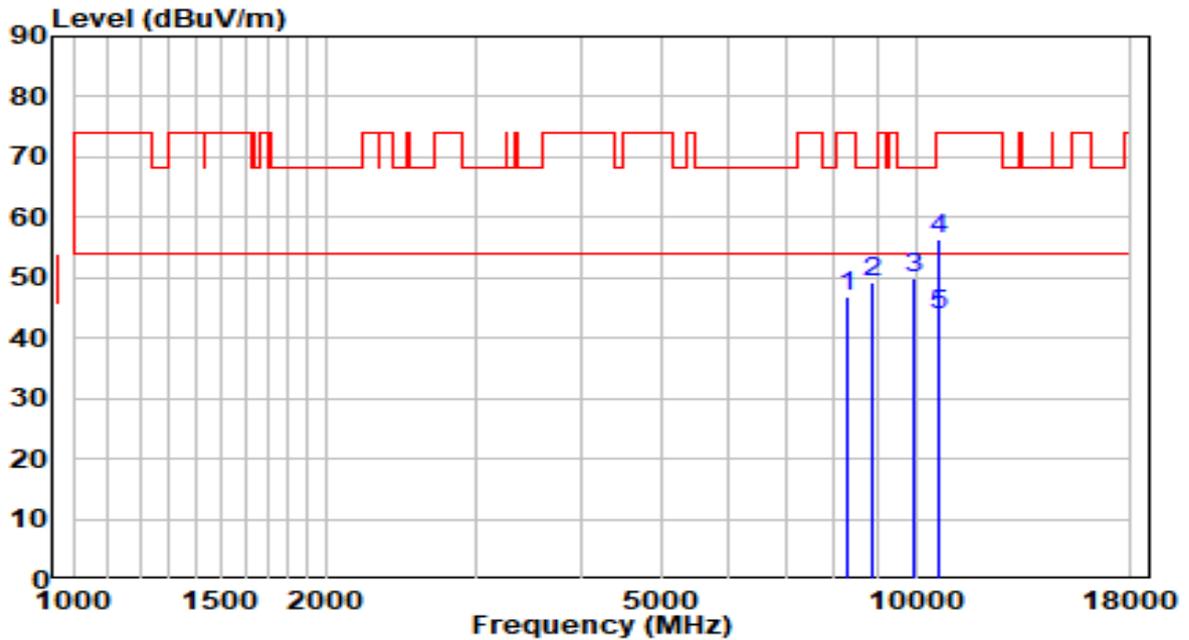


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8276.000	34.35	12.49	46.83	-27.17	74.00	Peak
2	8888.000	35.73	13.41	49.13	-19.07	68.20	Peak
3	9959.000	34.55	15.28	49.83	-18.37	68.20	Peak
4	10622.000	39.16	17.24	56.41	-17.59	74.00	Peak
5	* 10622.000	26.59	17.24	43.84	-10.16	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

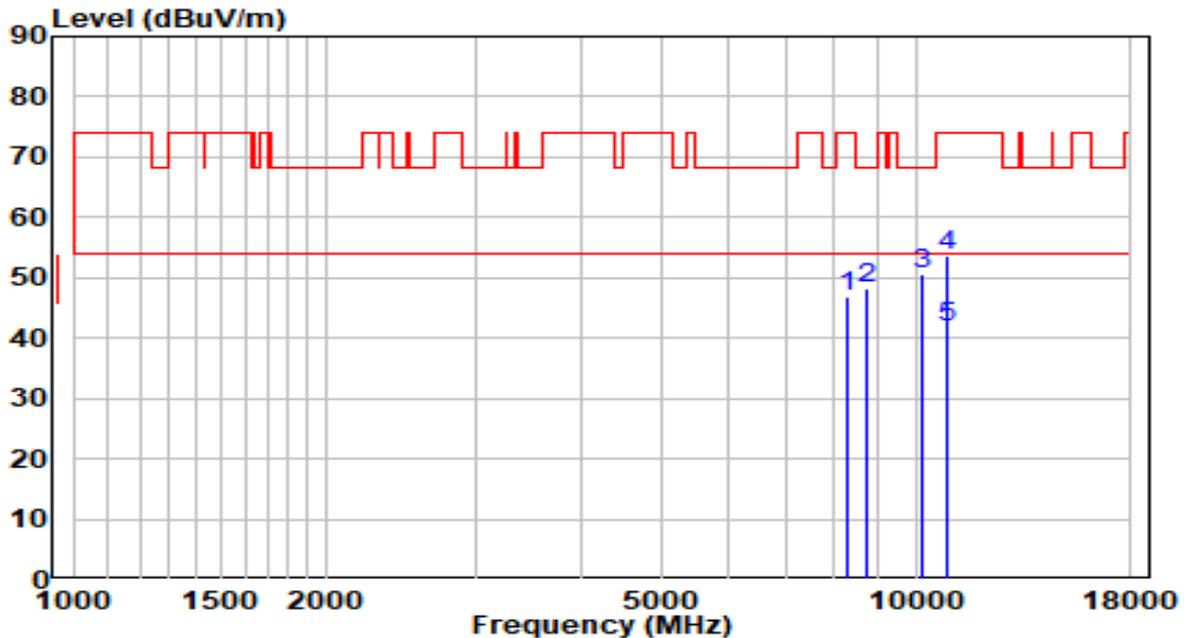


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	34.51	12.48	46.99	-27.01	74.00	Peak
2	8752.000	35.18	13.07	48.25	-19.95	68.20	Peak
3	10180.000	34.49	15.98	50.46	-17.74	68.20	Peak
4	10860.000	36.00	17.58	53.58	-20.42	74.00	Peak
5	* 10860.000	24.19	17.58	41.77	-12.23	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

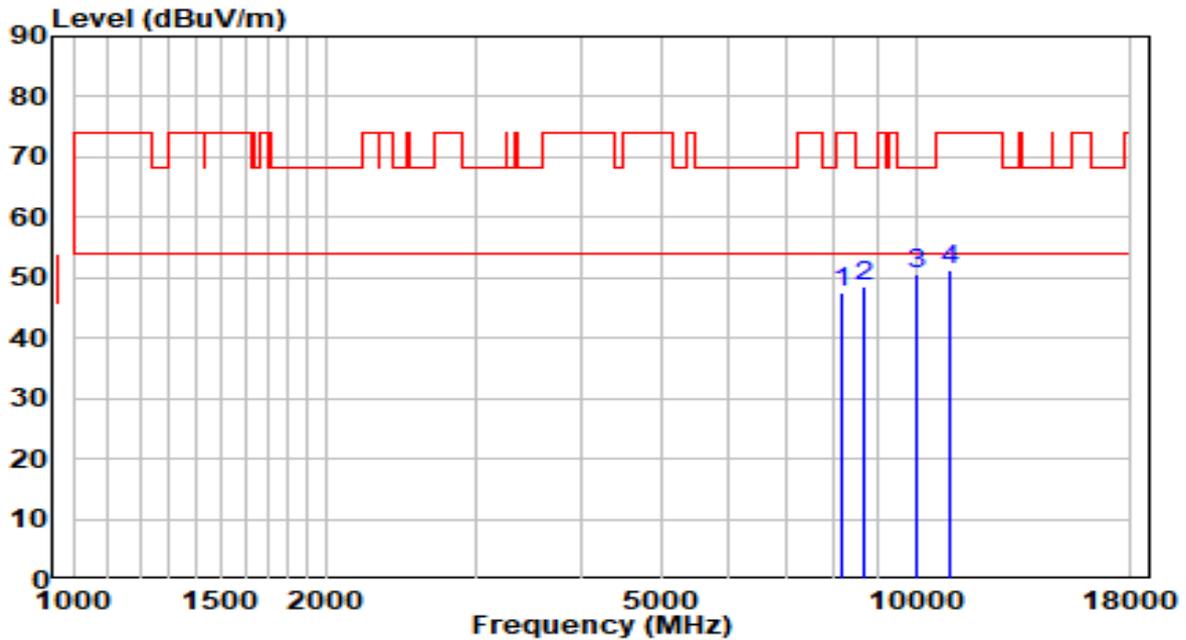


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8191.000	34.93	12.50	47.43	-26.57	74.00	Peak
2	8701.000	35.59	12.95	48.54	-19.66	68.20	Peak
3	* 10027.000	35.28	15.45	50.73	-17.47	68.20	Peak
4	11013.000	33.44	17.80	51.23	-22.77	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

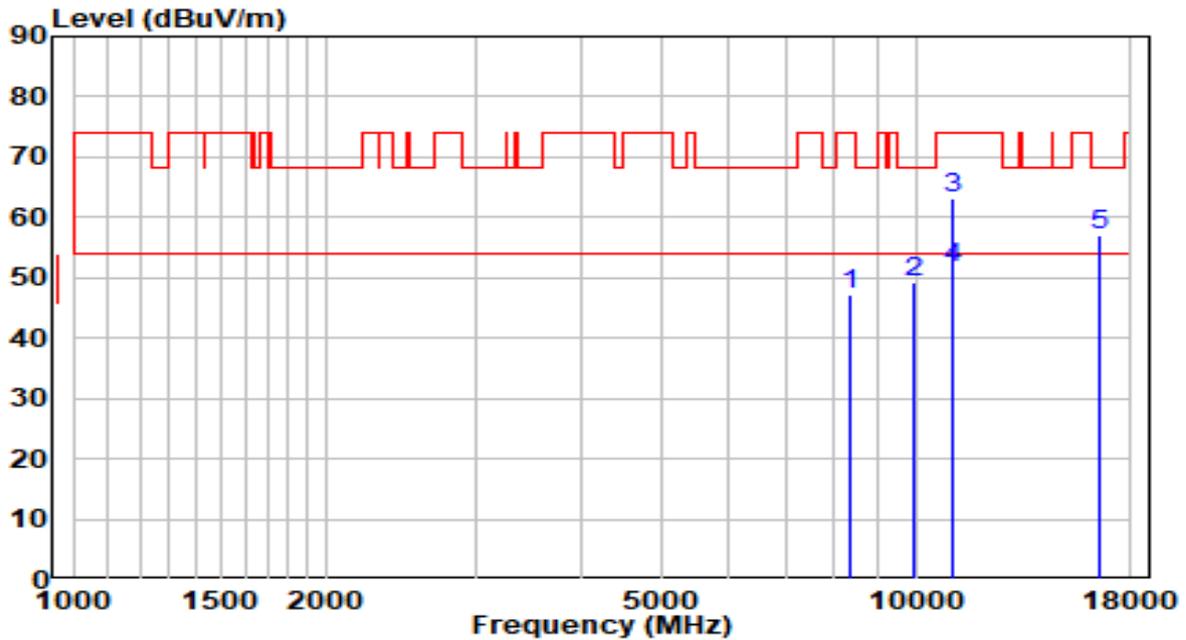


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	34.60	12.48	47.08	-26.92	74.00	Peak
2	9976.000	33.94	15.31	49.25	-18.95	68.20	Peak
3	11030.000	45.39	17.82	63.21	-10.79	74.00	Peak
4 *	11030.000	33.91	17.82	51.73	-2.27	54.00	Average
5	16538.000	34.74	22.24	56.98	-11.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

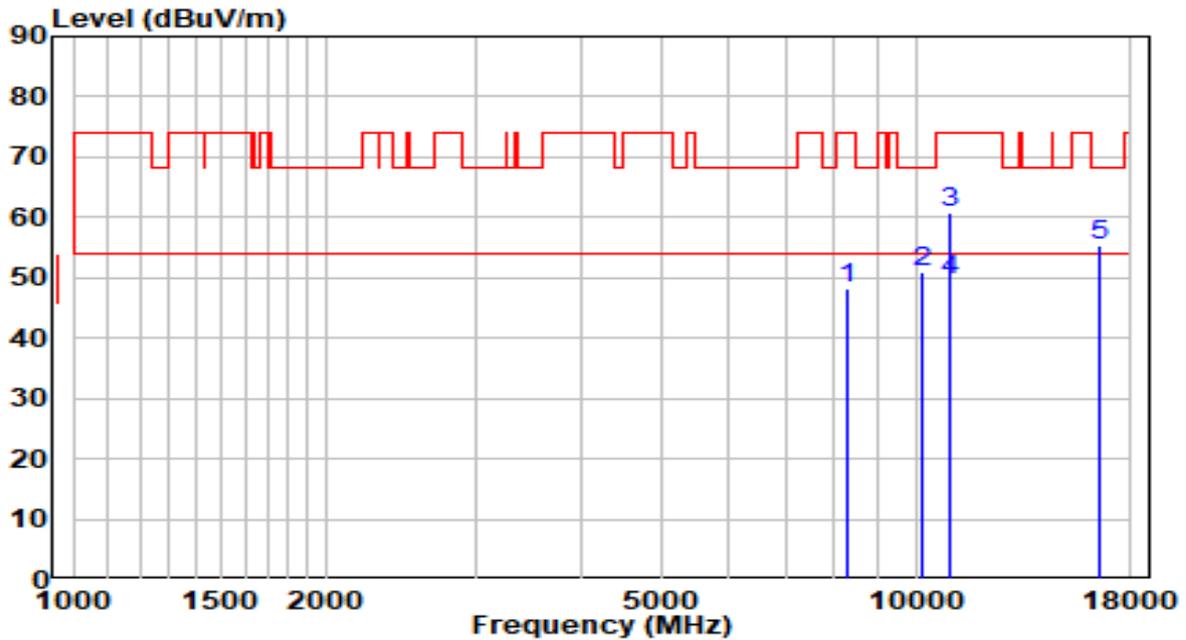


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	35.67	12.48	48.15	-25.85	74.00	Peak
2	10180.000	35.04	15.98	51.01	-17.19	68.20	Peak
3	11013.000	42.94	17.80	60.73	-13.27	74.00	Peak
4	* 11013.000	31.66	17.80	49.46	-4.54	54.00	Average
5	16538.000	33.18	22.24	55.42	-12.78	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

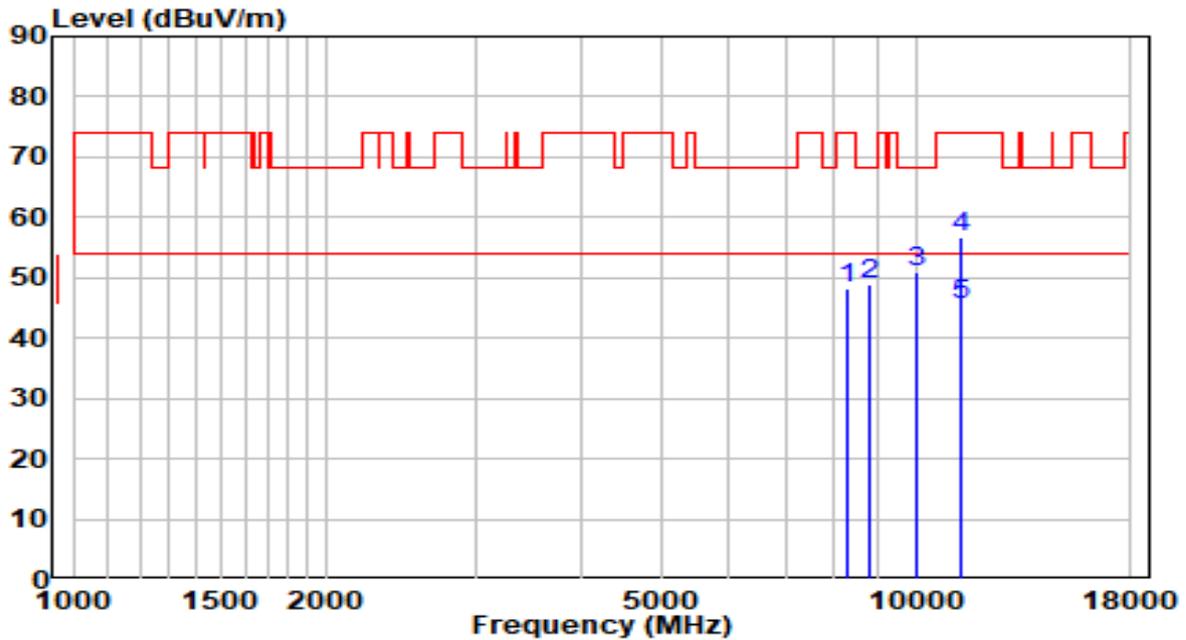


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8276.000	35.62	12.49	48.11	-25.89	74.00	Peak
2	8820.000	35.51	13.24	48.75	-19.45	68.20	Peak
3	10044.000	35.29	15.51	50.80	-17.40	68.20	Peak
4	11336.000	38.33	18.23	56.56	-17.44	74.00	Peak
5	* 11336.000	27.15	18.23	45.38	-8.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

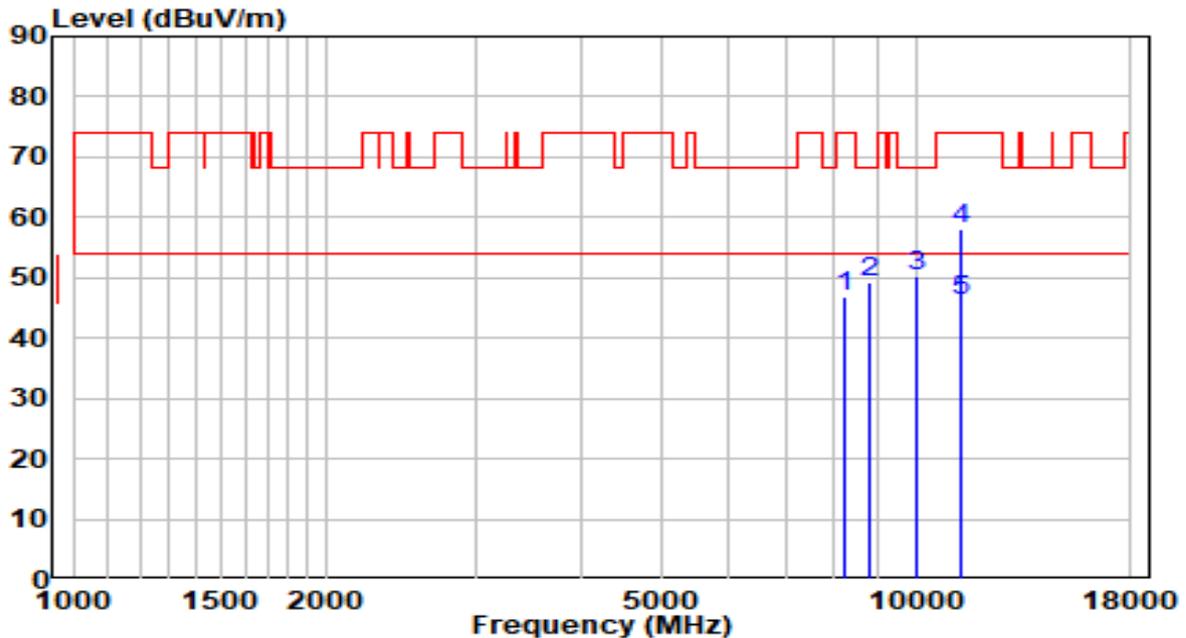


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8208.000	34.28	12.50	46.78	-27.22	74.00	Peak
2	8803.000	35.93	13.20	49.12	-19.08	68.20	Peak
3	10044.000	34.74	15.51	50.25	-17.95	68.20	Peak
4	11336.000	39.71	18.23	57.94	-16.06	74.00	Peak
5	* 11336.000	27.85	18.23	46.08	-7.92	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

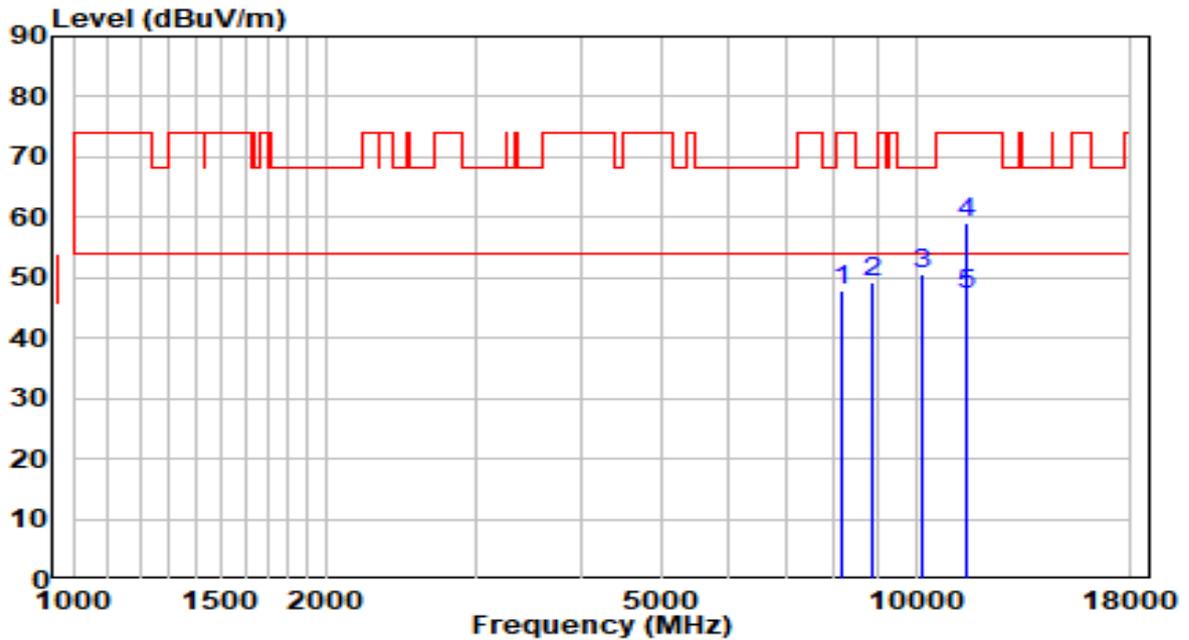


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8174.000	35.23	12.50	47.74	-26.26	74.00	Peak
2	8854.000	35.78	13.32	49.10	-19.10	68.20	Peak
3	10180.000	34.50	15.98	50.48	-17.72	68.20	Peak
4	11506.000	40.80	18.44	59.24	-14.76	74.00	Peak
5	* 11506.000	28.80	18.44	47.24	-6.76	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

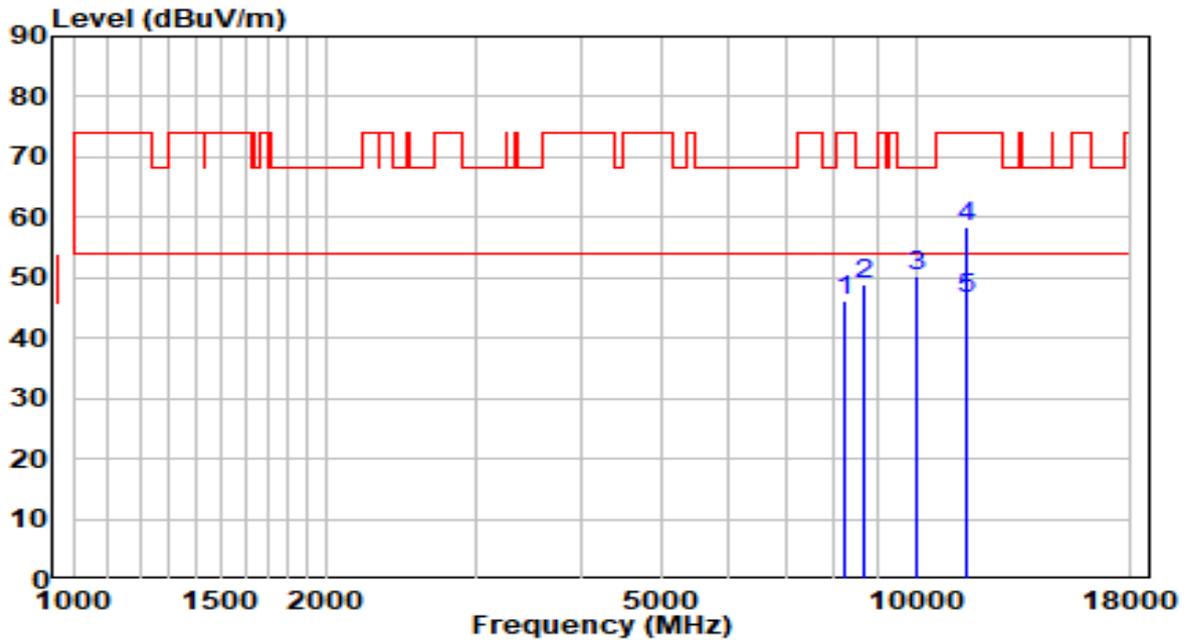


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	33.70	12.49	46.19	-27.81	74.00	Peak
2	8701.000	35.81	12.95	48.76	-19.44	68.20	Peak
3	9993.000	35.01	15.35	50.36	-17.84	68.20	Peak
4	11506.000	39.97	18.44	58.42	-15.58	74.00	Peak
5	* 11506.000	27.99	18.44	46.43	-7.57	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

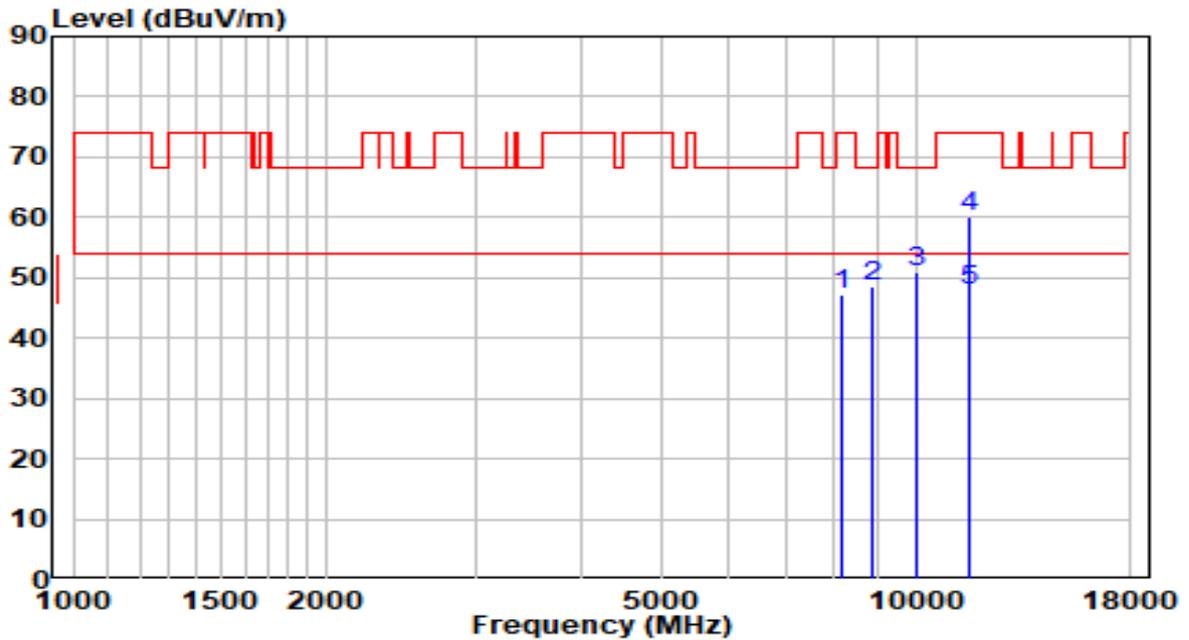


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8140.000	34.74	12.51	47.24	-26.76	74.00	Peak
2	8854.000	35.40	13.32	48.72	-19.48	68.20	Peak
3	10044.000	35.60	15.51	51.11	-17.09	68.20	Peak
4	11608.000	41.68	18.31	59.99	-14.01	74.00	Peak
5	* 11608.000	29.46	18.31	47.77	-6.23	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

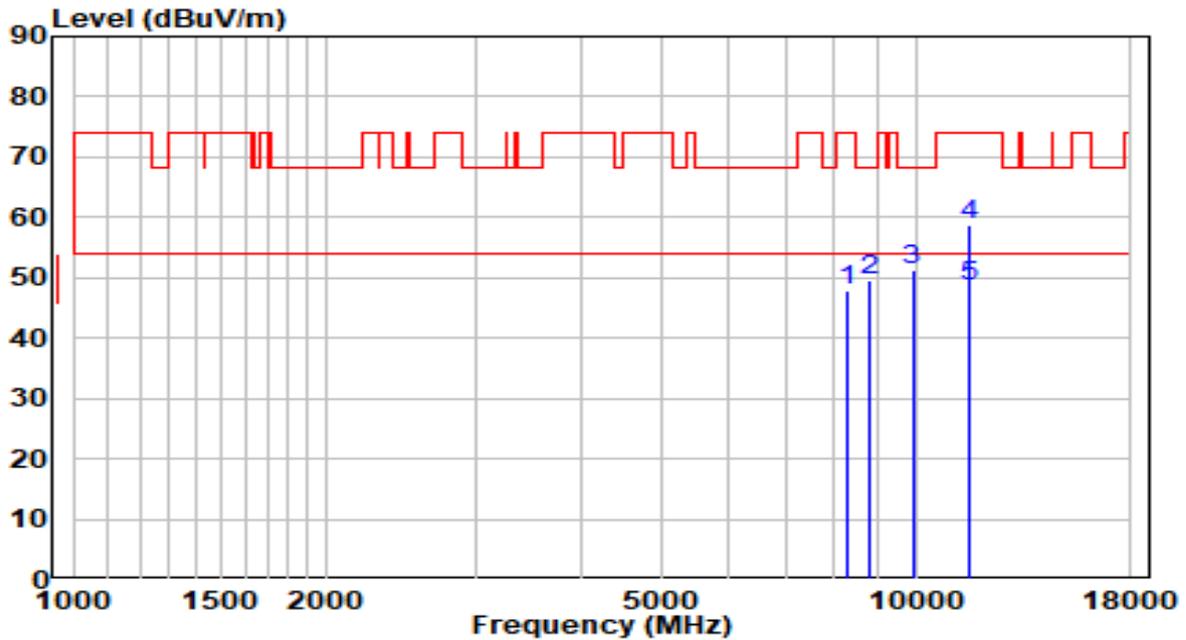


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	35.48	12.49	47.96	-26.04	74.00	Peak
2	8837.000	36.14	13.28	49.42	-18.78	68.20	Peak
3	9908.000	36.14	15.19	51.32	-16.88	68.20	Peak
4	11608.000	40.45	18.31	58.77	-15.23	74.00	Peak
5	* 11608.000	30.27	18.31	48.58	-5.42	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

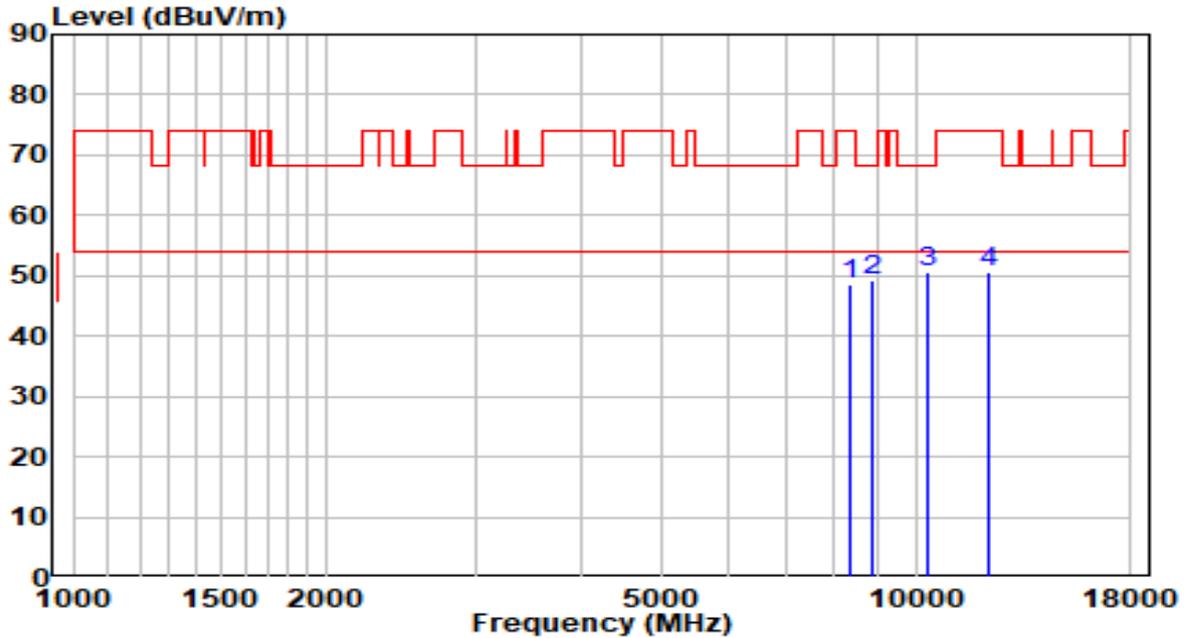


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8344.000	36.15	12.48	48.63	-25.37	74.00	Peak
2	8888.000	35.70	13.41	49.11	-19.09	68.20	Peak
3	* 10299.000	34.11	16.38	50.49	-17.71	68.20	Peak
4	12237.000	32.71	17.86	50.57	-23.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

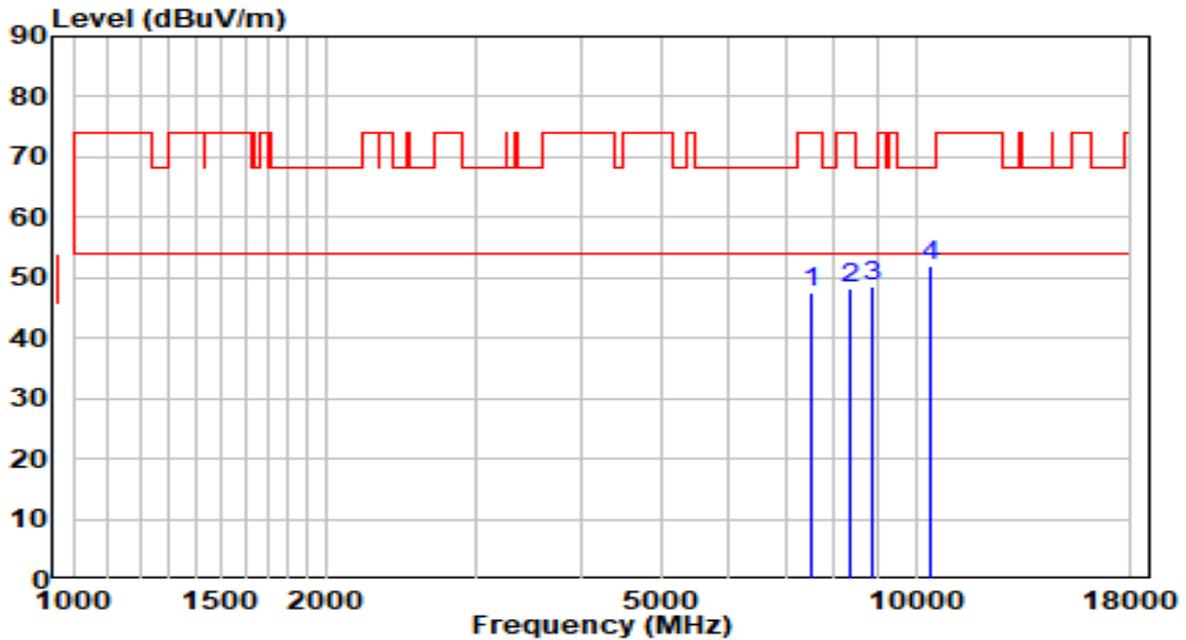


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	35.76	11.73	47.50	-26.50	74.00	Peak
2	8327.000	35.71	12.48	48.19	-25.81	74.00	Peak
3	8871.000	35.32	13.36	48.69	-19.51	68.20	Peak
4	* 10384.000	35.38	16.67	52.05	-16.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

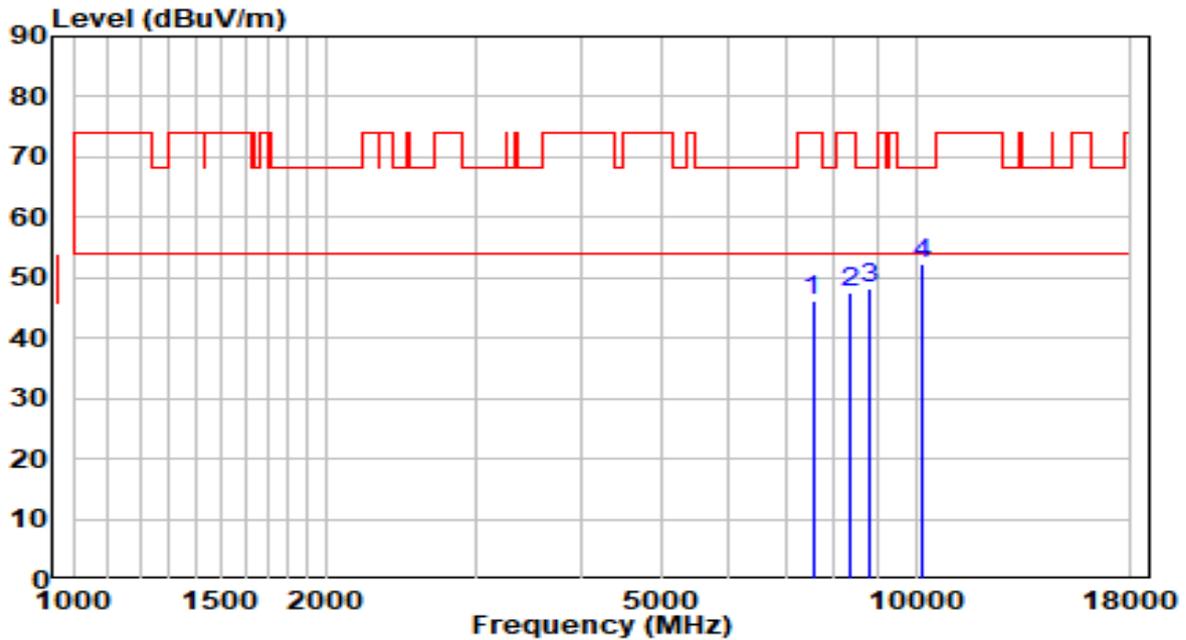


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	34.56	11.79	46.35	-27.65	74.00	Peak
2	8361.000	35.02	12.48	47.50	-26.50	74.00	Peak
3	8803.000	34.92	13.20	48.12	-20.08	68.20	Peak
4	* 10180.000	36.24	15.98	52.21	-15.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

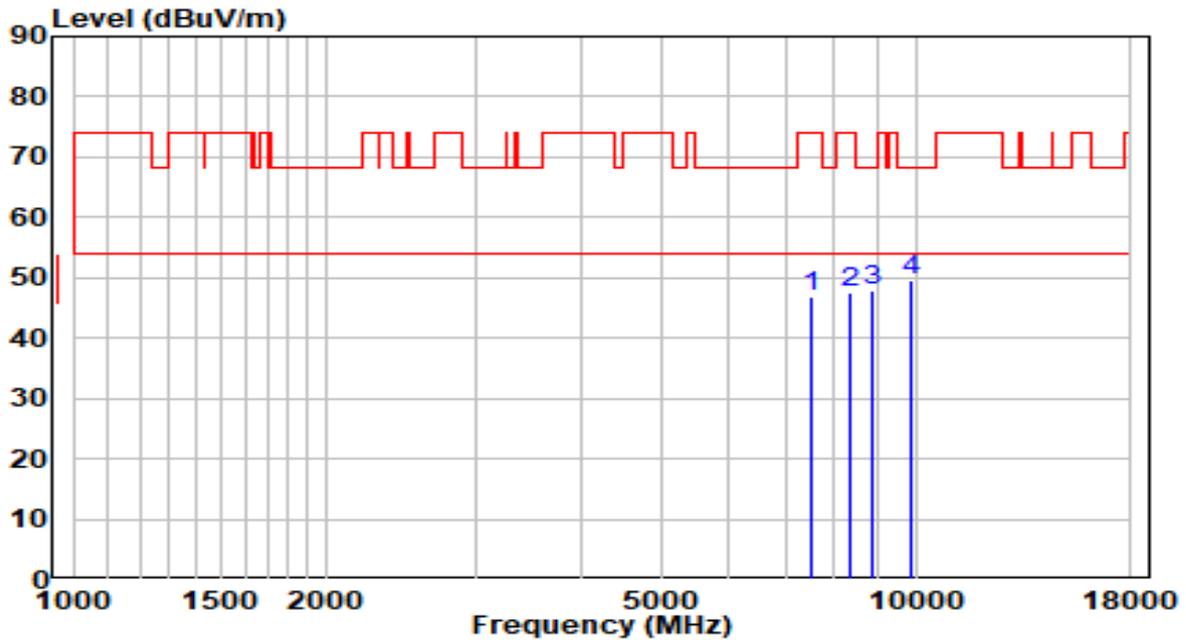


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	34.96	11.76	46.72	-27.28	74.00	Peak
2	8344.000	34.96	12.48	47.43	-26.57	74.00	Peak
3	8888.000	34.54	13.41	47.95	-20.25	68.20	Peak
4	* 9857.000	34.59	15.09	49.68	-18.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

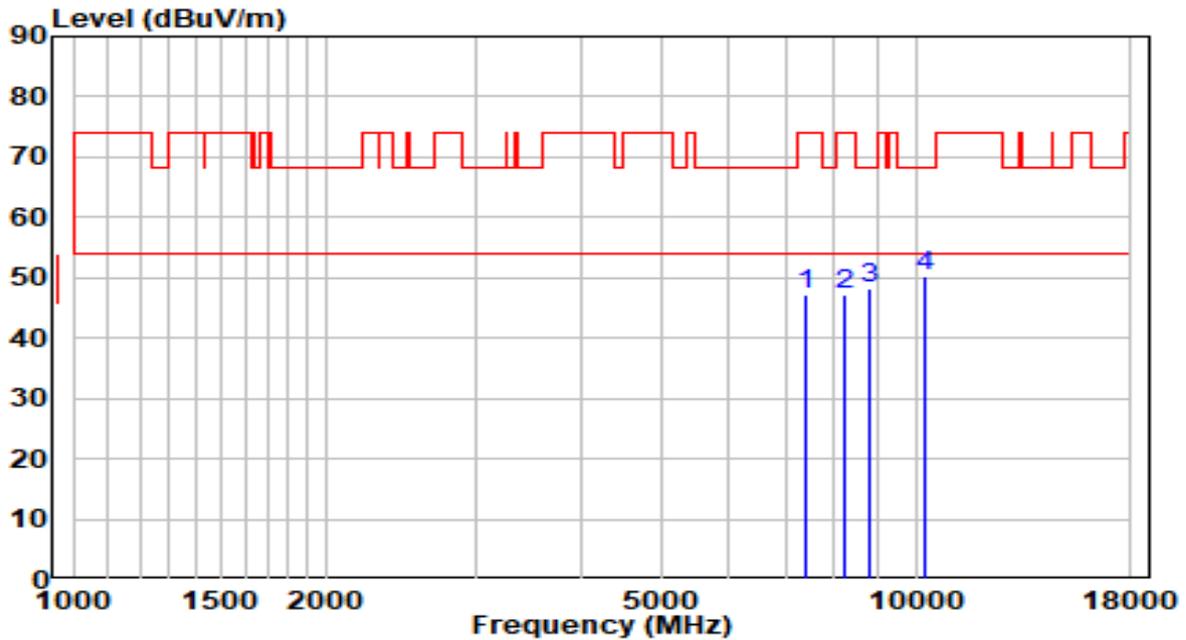


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7426.000	35.84	11.51	47.34	-26.66	74.00	Peak
2	8242.000	34.78	12.49	47.28	-26.72	74.00	Peak
3	8820.000	34.93	13.24	48.16	-20.04	68.20	Peak
4	* 10231.000	33.99	16.15	50.14	-18.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

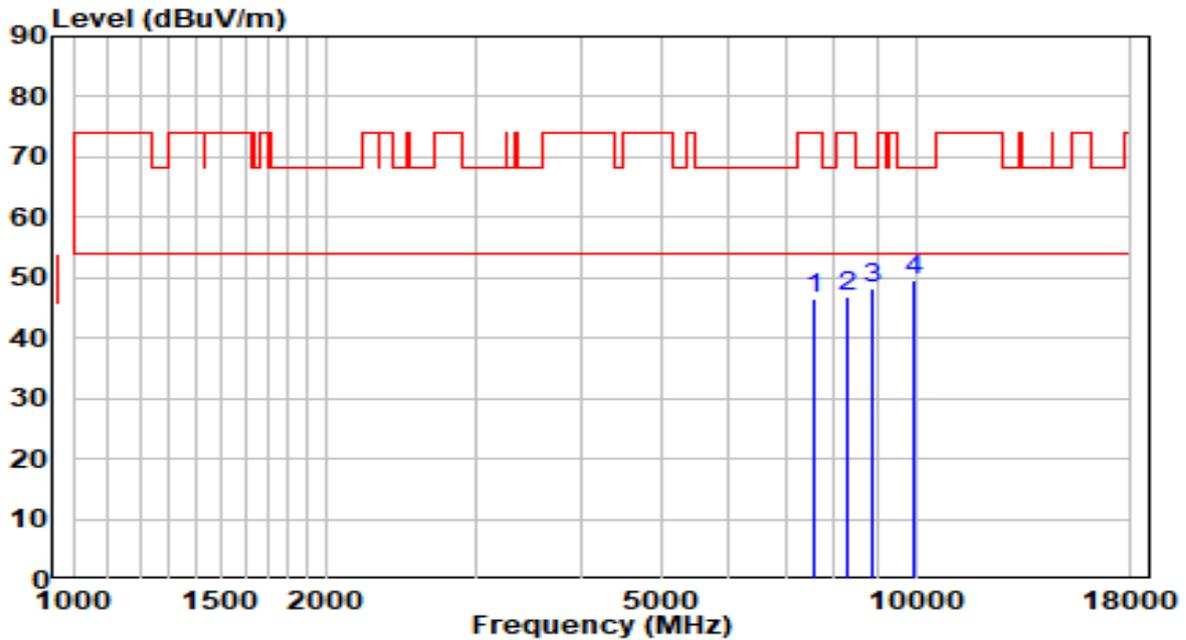


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	34.53	11.87	46.41	-27.59	74.00	Peak
2	8276.000	34.40	12.49	46.89	-27.11	74.00	Peak
3	8888.000	34.79	13.41	48.20	-20.00	68.20	Peak
4	* 9976.000	34.43	15.31	49.75	-18.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

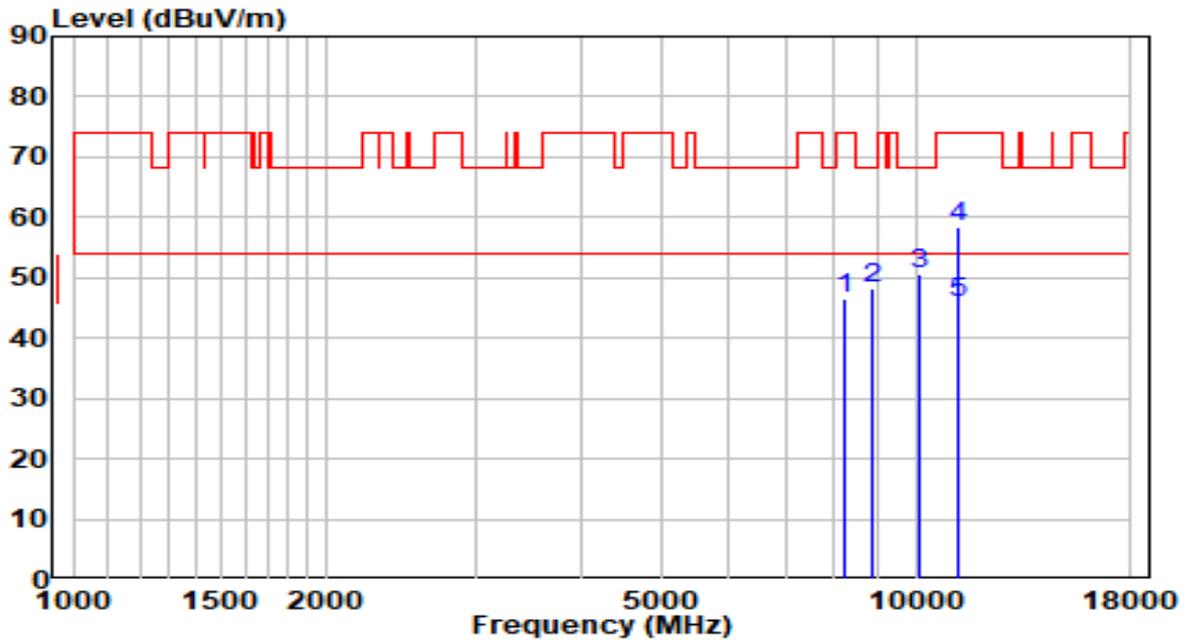


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8242.000	34.18	12.49	46.67	-27.33	74.00	Peak
2	8854.000	34.87	13.32	48.19	-20.01	68.20	Peak
3	10095.000	34.86	15.68	50.55	-17.65	68.20	Peak
4	11234.000	40.20	18.09	58.29	-15.71	74.00	Peak
5	* 11234.000	27.65	18.09	45.74	-8.26	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

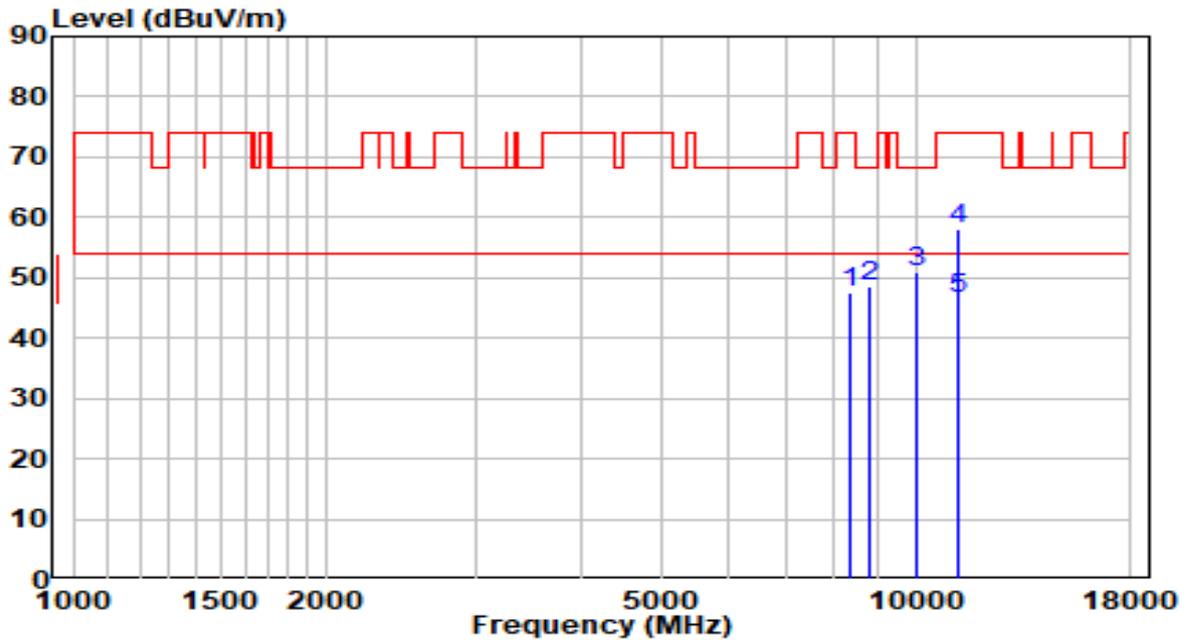


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	34.98	12.48	47.47	-26.53	74.00	Peak
2	8820.000	35.27	13.24	48.51	-19.69	68.20	Peak
3	9993.000	35.53	15.35	50.88	-17.32	68.20	Peak
4	11217.000	39.88	18.07	57.95	-16.05	74.00	Peak
5	* 11217.000	28.46	18.07	46.53	-7.47	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

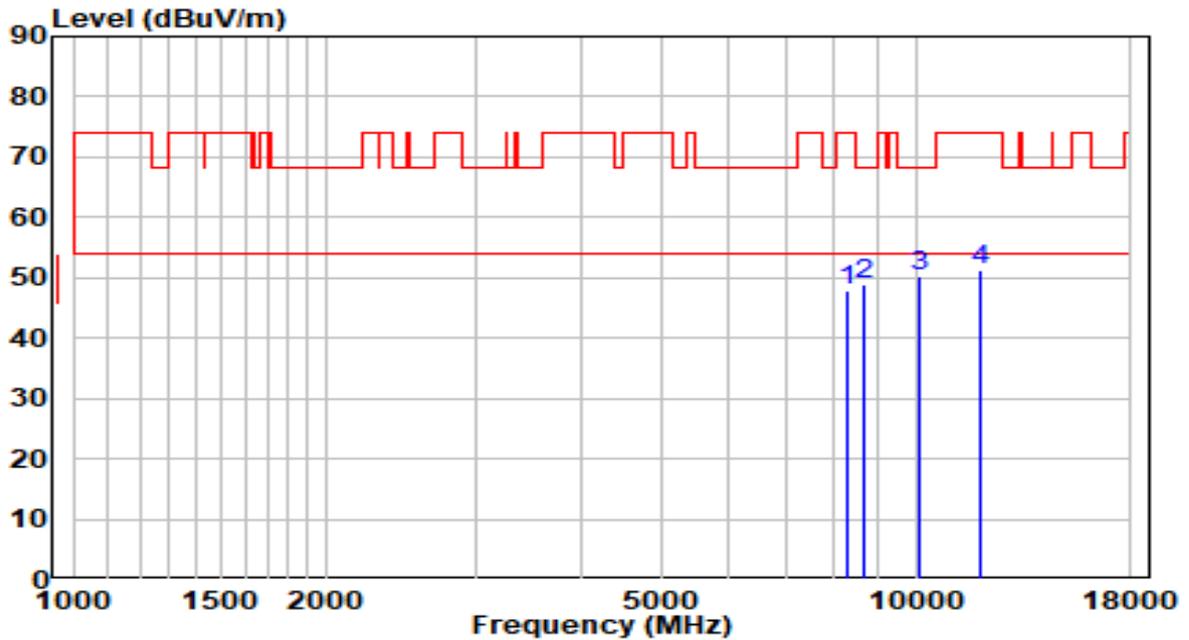


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8310.000	35.25	12.48	47.74	-26.26	74.00	Peak
2	8650.000	36.07	12.82	48.89	-19.31	68.20	Peak
3	* 10078.000	34.59	15.63	50.21	-17.99	68.20	Peak
4	11897.000	33.43	17.95	51.38	-22.62	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-12
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.2°C/48.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

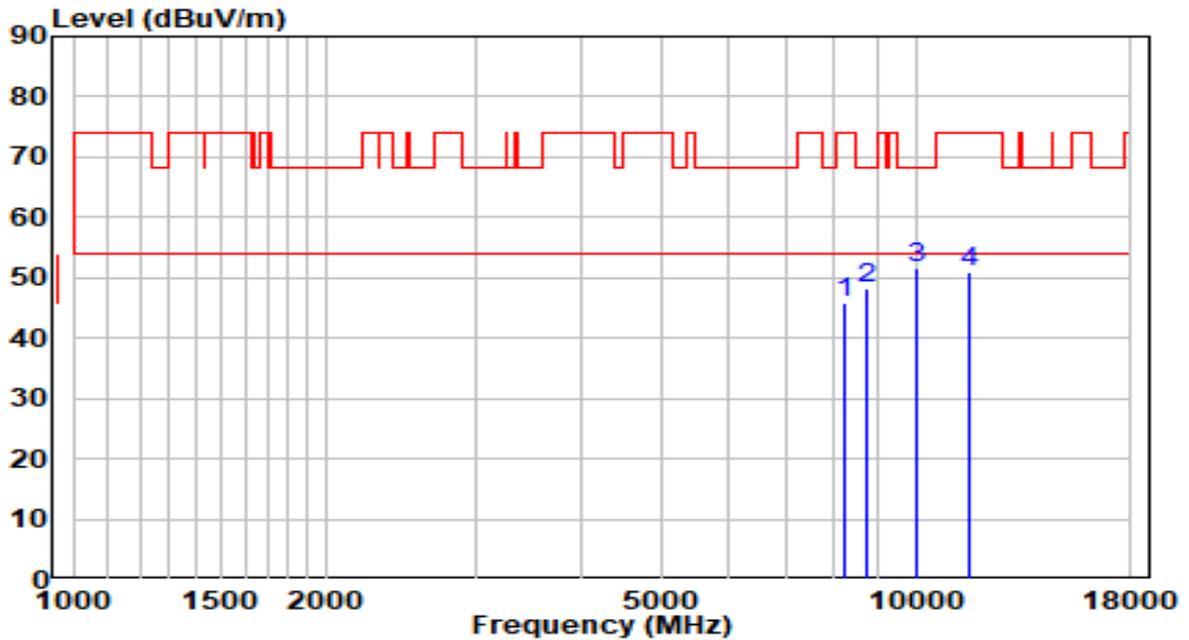


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	33.29	12.49	45.78	-28.22	74.00	Peak
2	8735.000	35.06	13.03	48.09	-20.11	68.20	Peak
3	* 10044.000	36.17	15.51	51.68	-16.52	68.20	Peak
4	11591.000	32.52	18.34	50.86	-23.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The worst case of Radiated Emission below 1GHz:

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-18
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator	Temp. / Humidity	22.2°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	120V/60Hz

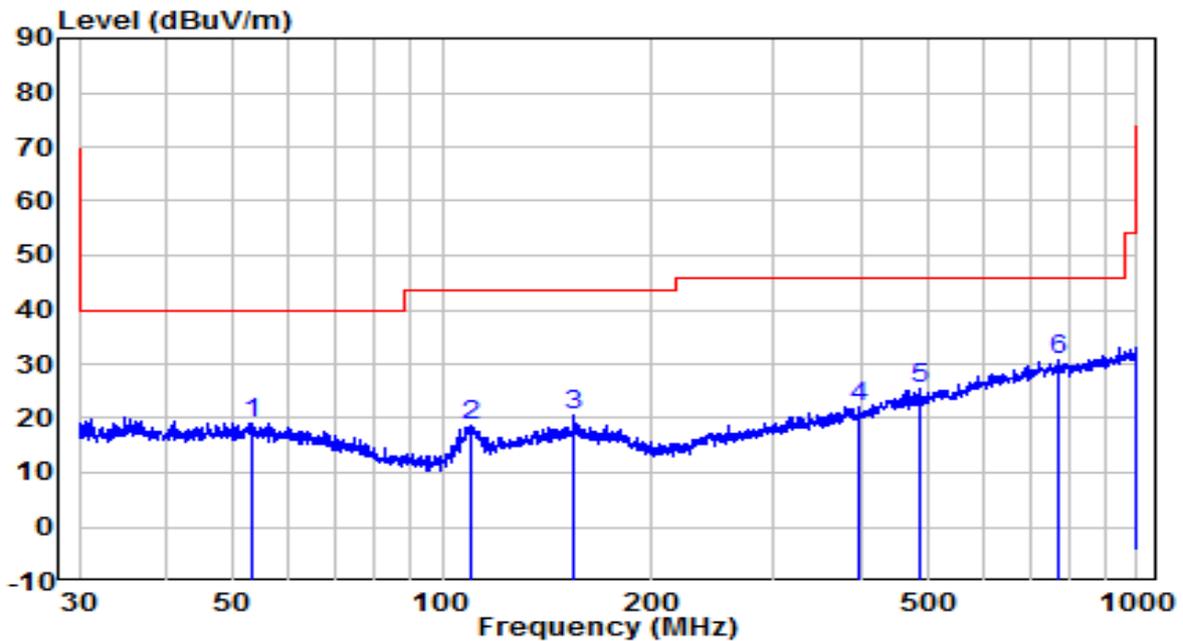


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	53.038	-2.44	21.49	19.05	-20.95	40.00	QP
2	110.182	0.16	18.68	18.84	-24.66	40.00	QP
3	155.092	4.24	16.15	20.39	-23.11	46.00	QP
4	396.937	-2.08	24.01	21.92	-24.08	46.00	QP
5	486.461	-0.39	25.86	25.47	-20.53	46.00	QP
6	* 774.158	0.55	30.30	30.84	-15.16	46.00	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-18
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator	Temp. / Humidity	22.2°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	120V/60Hz

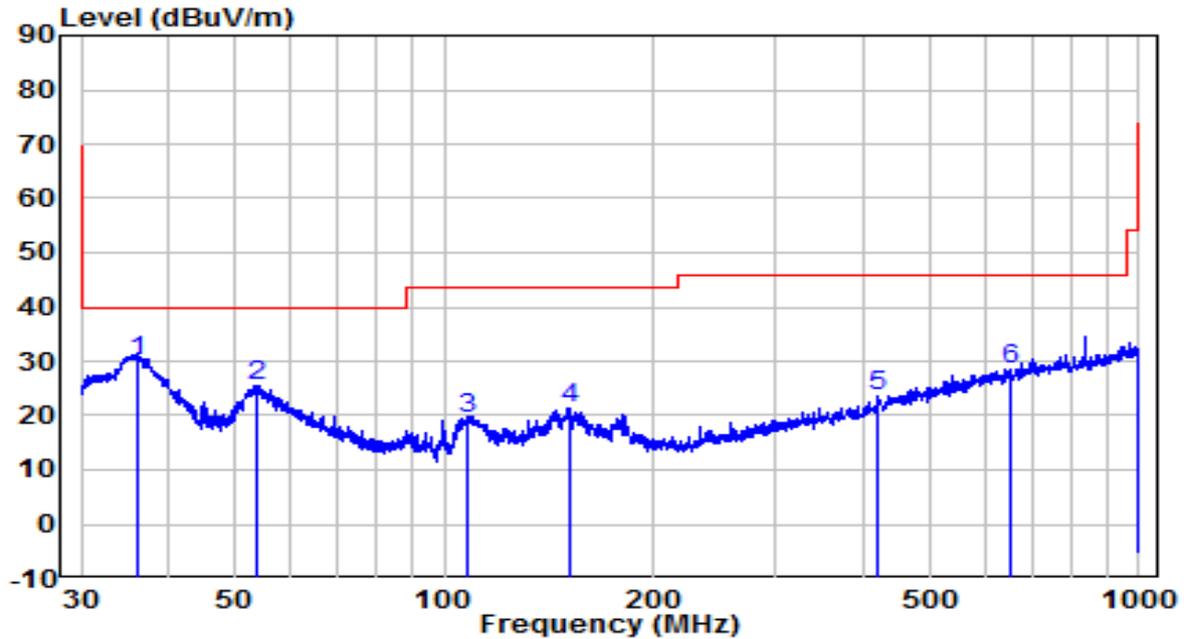

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	36.064	10.28	19.69	29.97	-10.03	40.00	QP
2		53.630	3.93	21.38	25.31	-14.69	40.00	QP
3		108.077	0.77	18.80	19.57	-23.93	43.50	QP
4		151.067	5.38	16.01	21.39	-22.11	43.50	QP
5		422.059	-0.89	24.43	23.54	-22.46	46.00	QP
6		654.232	-0.36	28.67	28.31	-17.69	46.00	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

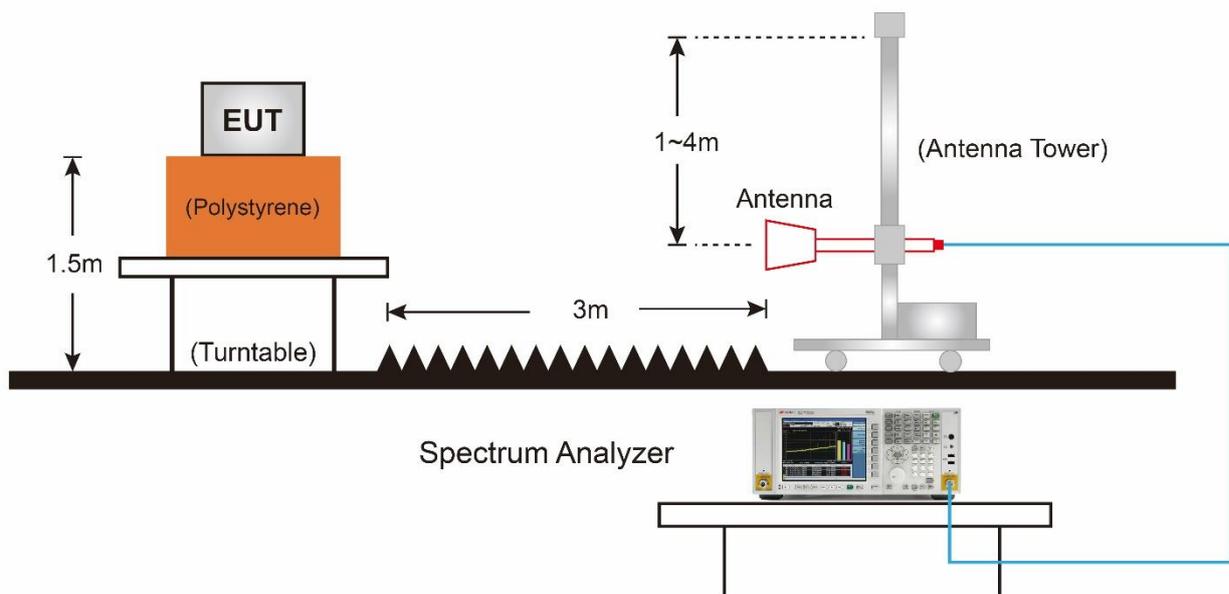

7.9.5. Test Result

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

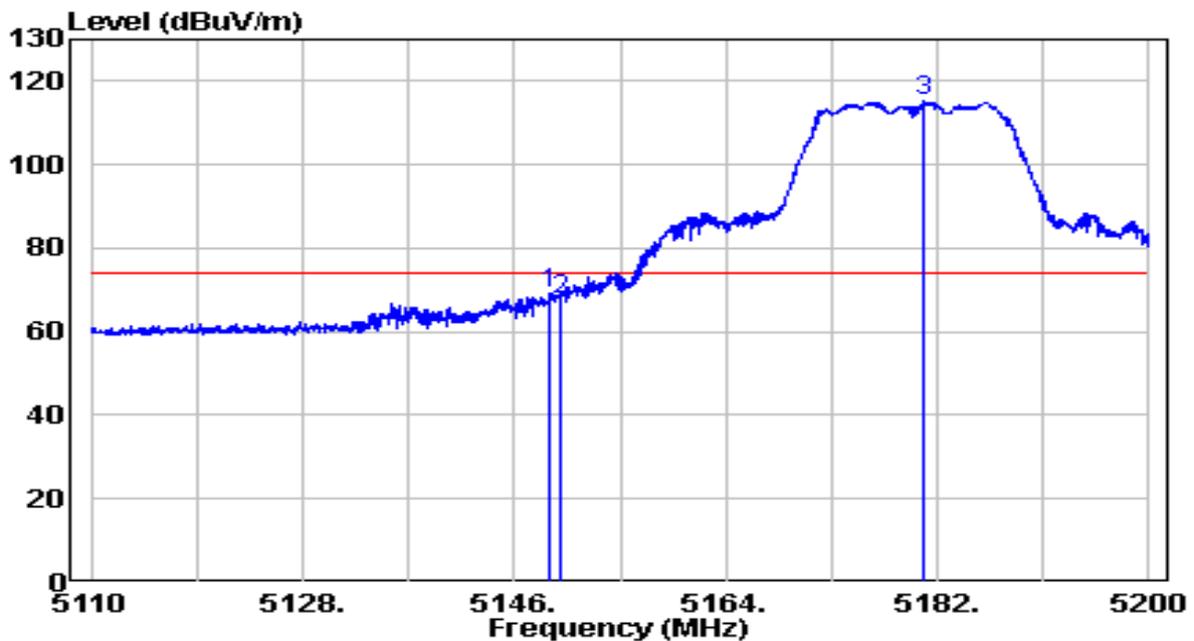


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.105	49.14	19.91	69.05	-4.95	74.00	Peak
2	5150.000	47.79	19.91	67.70	-6.30	74.00	Peak
3	* 5180.920	95.11	19.94	115.04	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

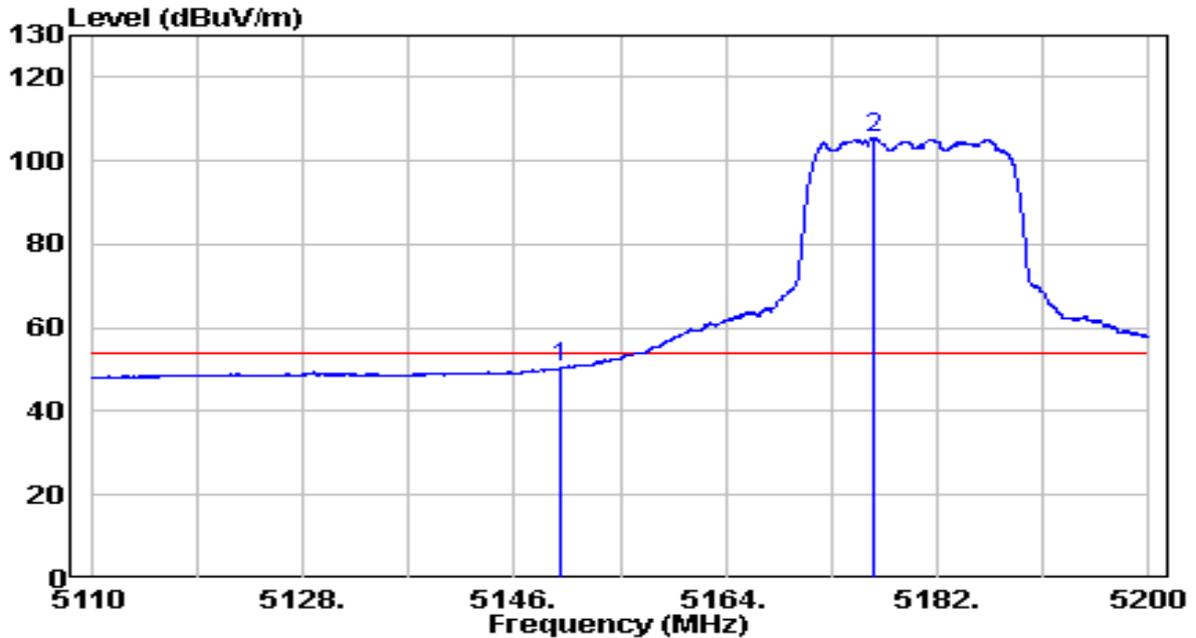


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.48	19.91	50.39	-3.61	54.00	Average
2	* 5176.555	85.45	19.93	105.38	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

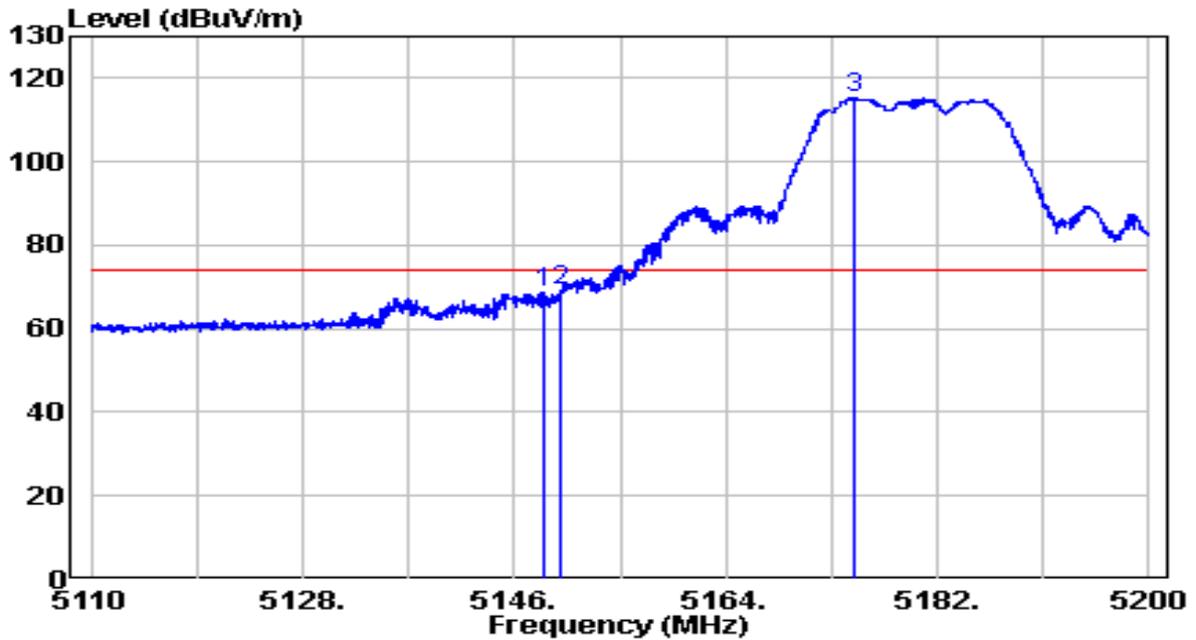


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.565	49.00	19.90	68.91	-5.09	74.00	Peak
2	5150.000	49.21	19.91	69.12	-4.88	74.00	Peak
3	* 5174.935	95.47	19.93	115.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

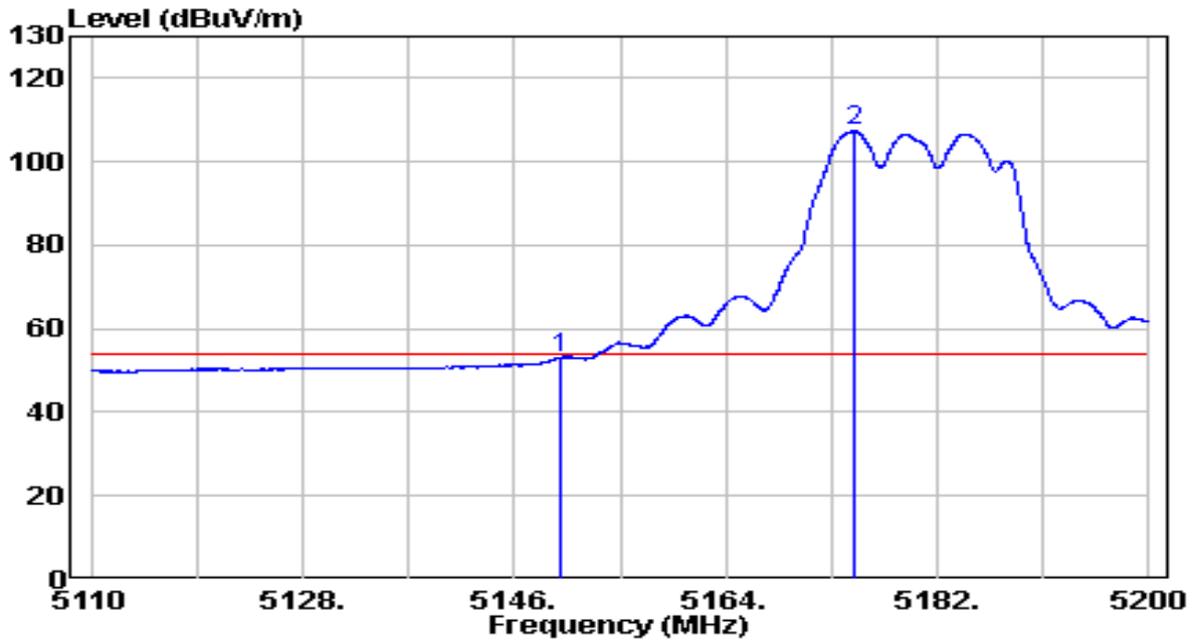


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.19	19.91	53.10	-0.90	54.00	Average
2	* 5174.890	87.35	19.93	107.28	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

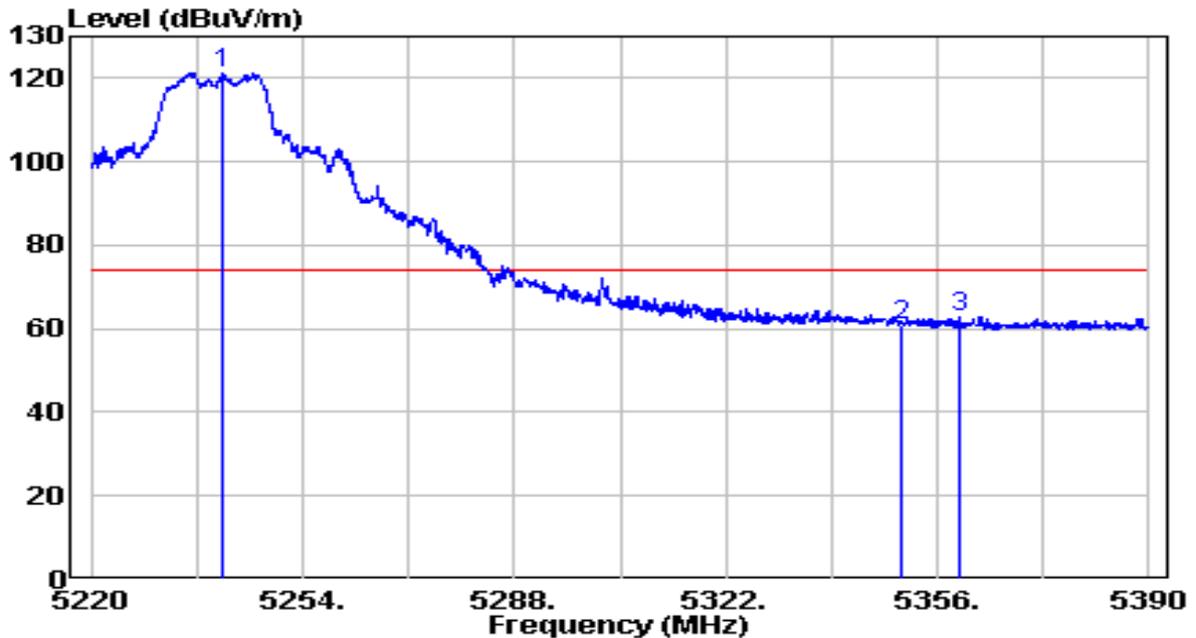


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5241.080	101.12	20.00	121.12	N/A	N/A	Peak
2	5350.000	40.81	20.11	60.92	-13.08	74.00	Peak
3	5359.740	42.65	20.12	62.77	-11.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

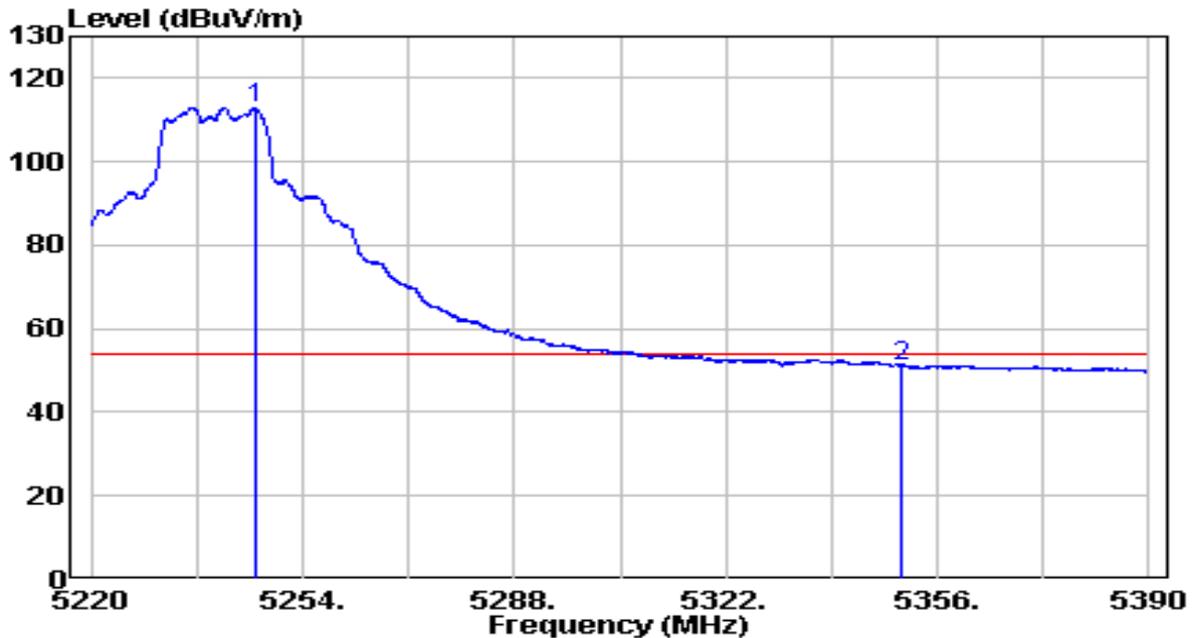


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5246.605	92.81	20.01	112.82	N/A	N/A	Average
2	5350.000	31.05	20.11	51.17	-2.83	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

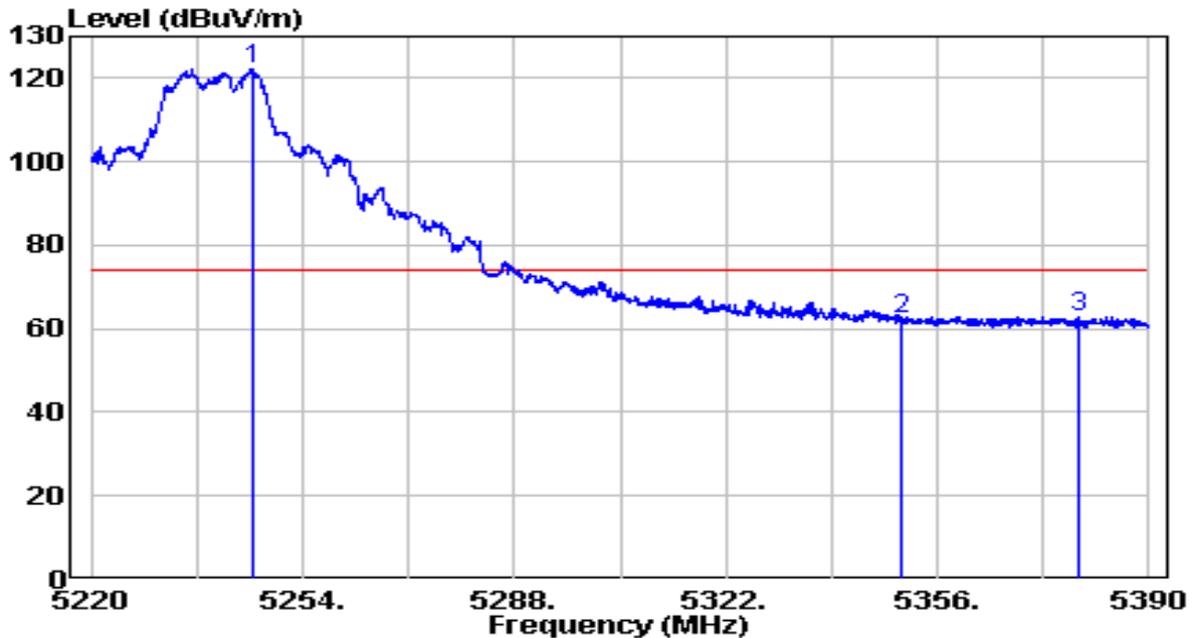


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5245.840	102.10	20.01	122.11	N/A	N/A	Peak
2	5350.000	42.13	20.11	62.24	-11.76	74.00	Peak
3	5378.780	42.89	20.14	63.03	-10.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

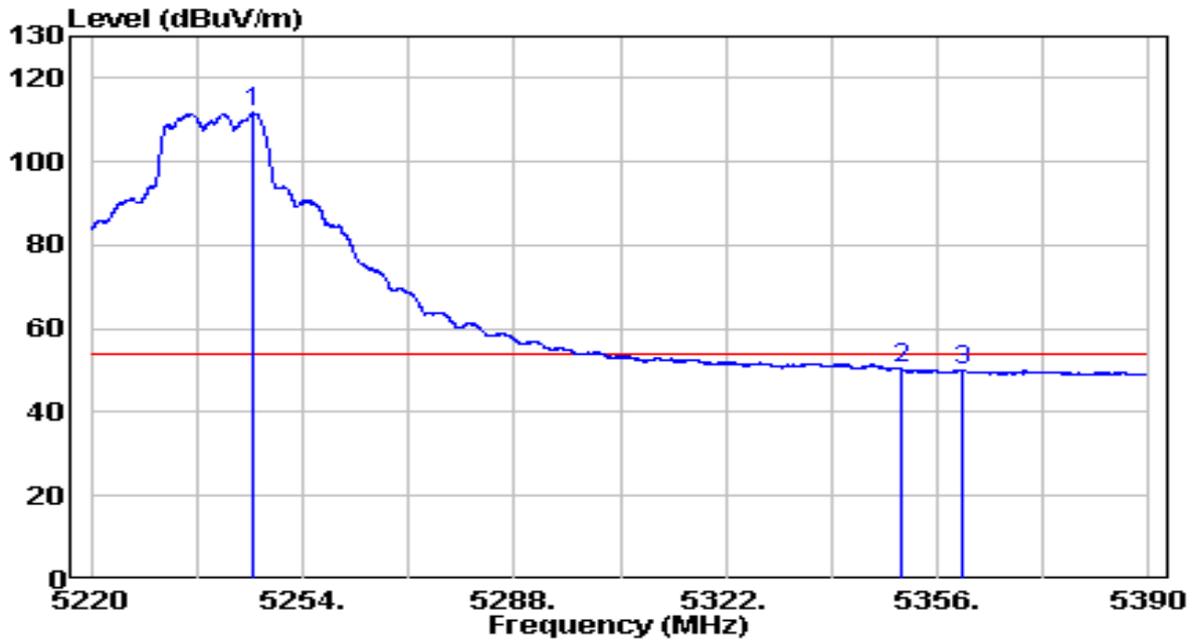


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5245.925	91.64	20.01	111.65	N/A	N/A	Average
2	5350.000	30.31	20.11	50.42	-3.58	54.00	Average
3	5360.165	30.00	20.12	50.13	-3.87	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

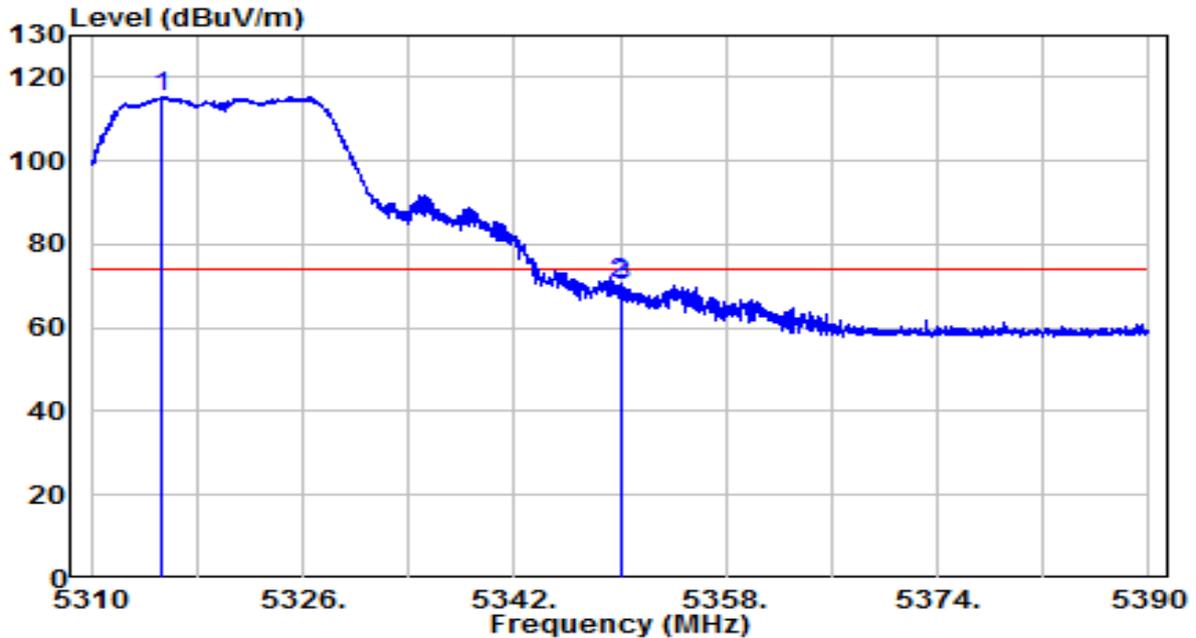


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.240	95.23	20.08	115.31	N/A	N/A	Peak
2	5350.000	50.56	20.11	70.67	-3.33	74.00	Peak
3	5350.200	50.04	20.11	70.15	-3.85	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

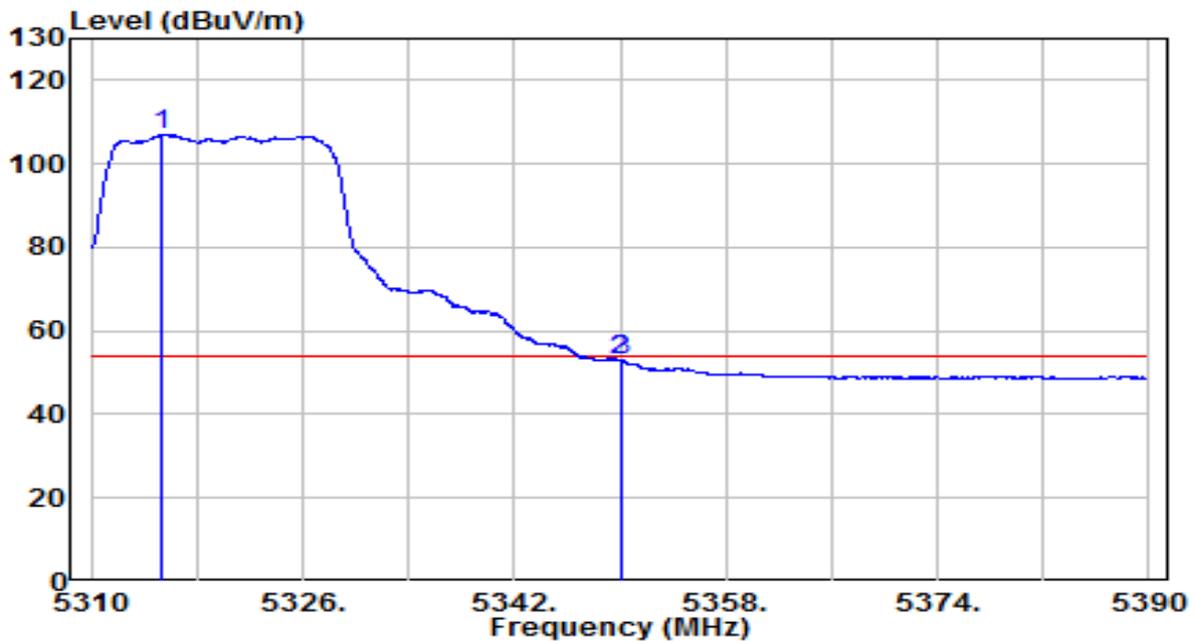


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.320	86.94	20.08	107.02	N/A	N/A	Average
2	5350.000	32.78	20.11	52.89	-1.11	54.00	Average
3	5350.120	32.91	20.11	53.02	-0.98	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

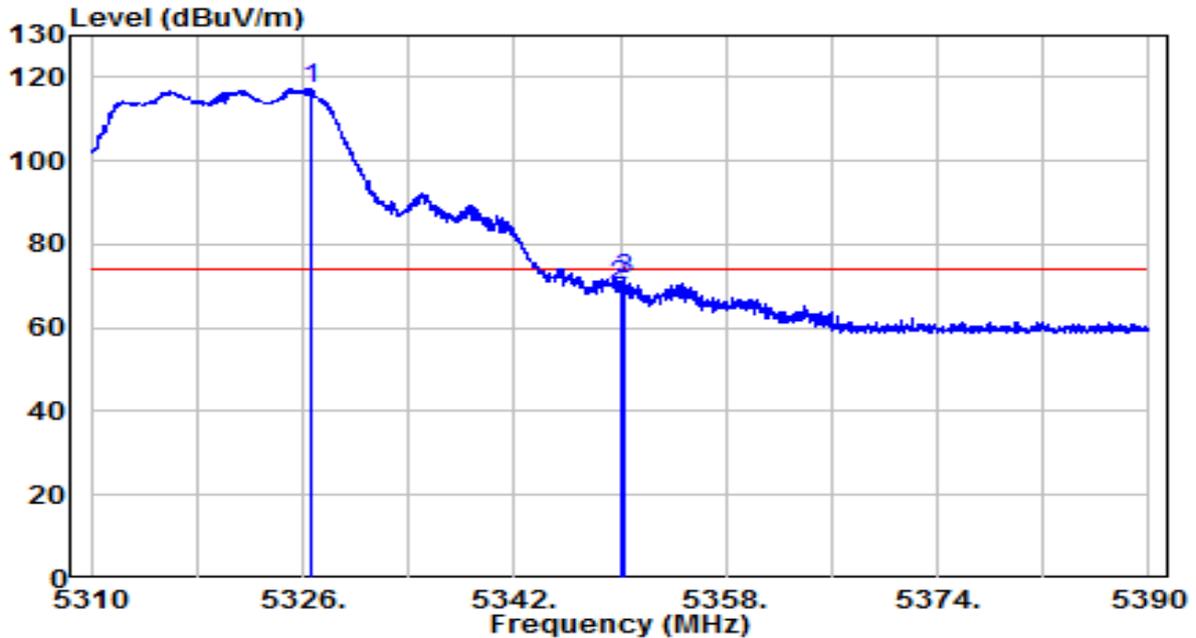


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5326.560	97.24	20.09	117.33	N/A	N/A	Peak
2	5350.000	50.15	20.11	70.26	-3.74	74.00	Peak
3	5350.240	51.33	20.11	71.44	-2.56	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)- Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

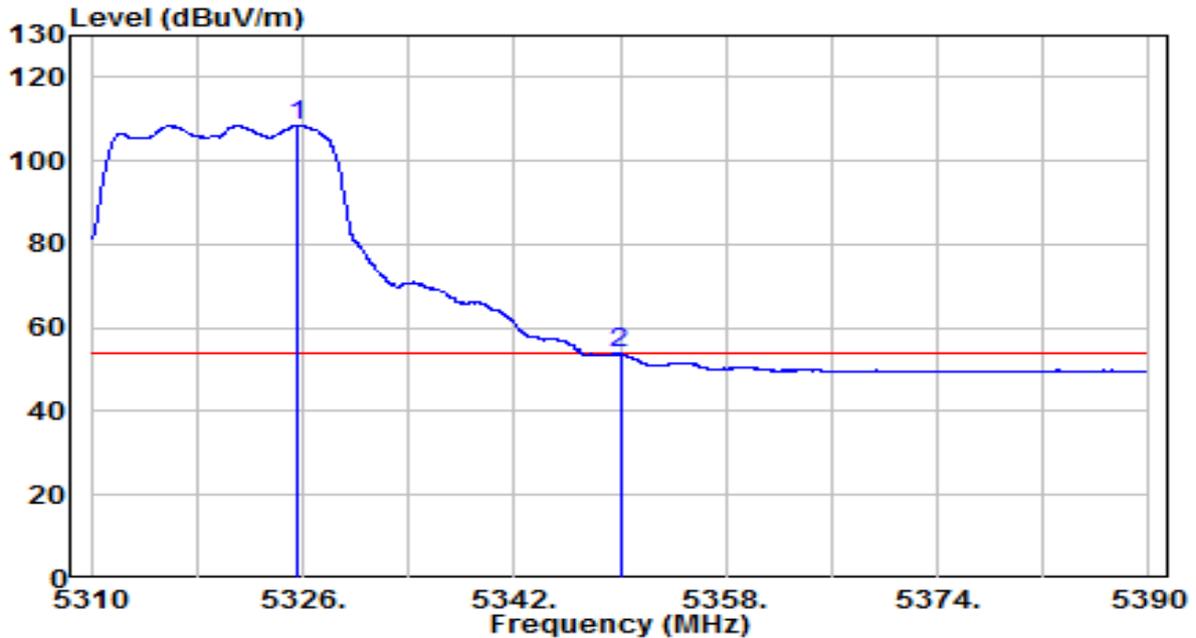


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5325.520	88.36	20.09	108.45	N/A	N/A	Average
2	5350.000	33.67	20.11	53.78	-0.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

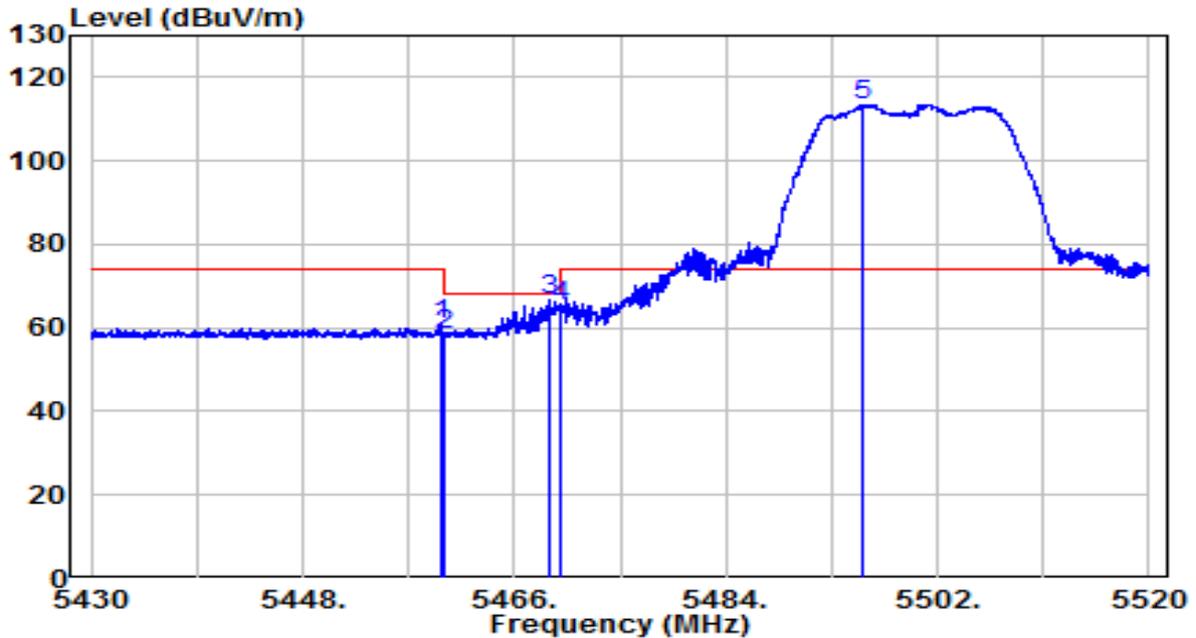


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.700	40.41	20.23	60.64	-13.36	74.00	Peak
2	5460.000	38.00	20.23	58.23	-9.97	68.20	Peak
3	5469.060	46.26	20.24	66.49	-1.71	68.20	Peak
4	5470.000	44.88	20.24	65.12	-3.08	68.20	Peak
5	* 5495.745	93.30	20.27	113.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

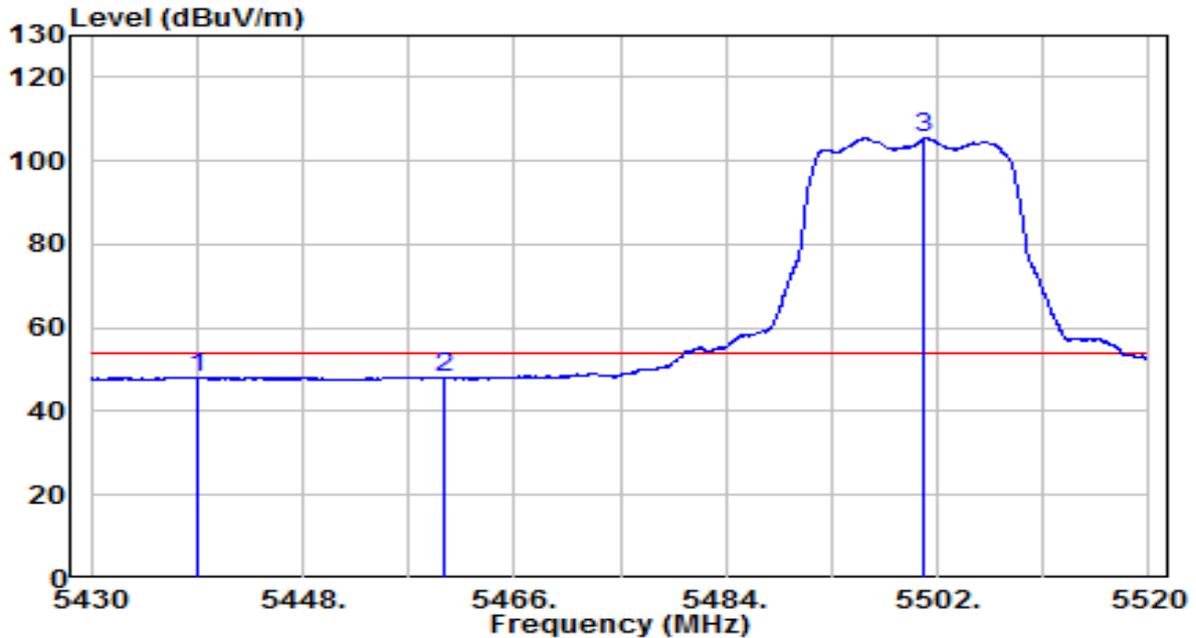


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5439.000	27.99	20.21	48.20	-5.80	54.00	Average
2	5460.000	27.73	20.23	47.96	-6.04	54.00	Average
3	* 5500.920	85.15	20.27	105.42	N/A	N/A	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

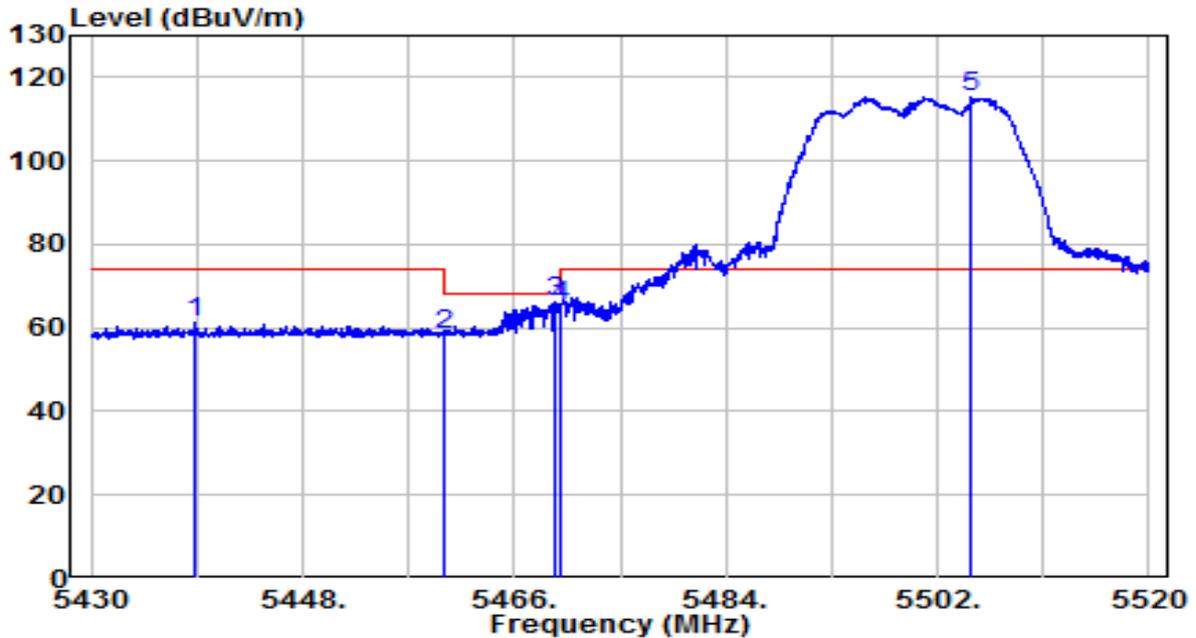


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.775	41.06	20.21	61.27	-12.73	74.00	Peak
2	5460.000	38.24	20.23	58.47	-9.73	68.20	Peak
3	5469.420	45.96	20.24	66.20	-2.00	68.20	Peak
4	5470.000	44.99	20.24	65.23	-2.97	68.20	Peak
5	* 5504.880	94.96	20.29	115.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

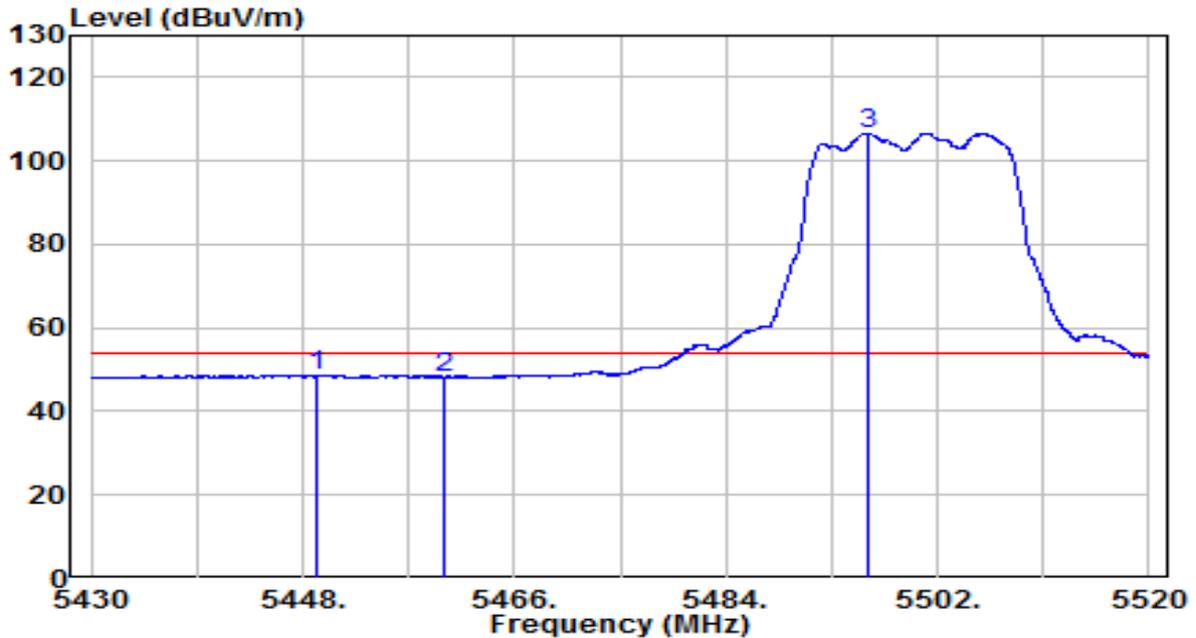


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.260	28.44	20.22	48.65	-5.35	54.00	Average
2	5460.000	27.96	20.23	48.19	-5.81	54.00	Average
3	* 5496.105	86.39	20.27	106.65	N/A	N/A	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/60Hz

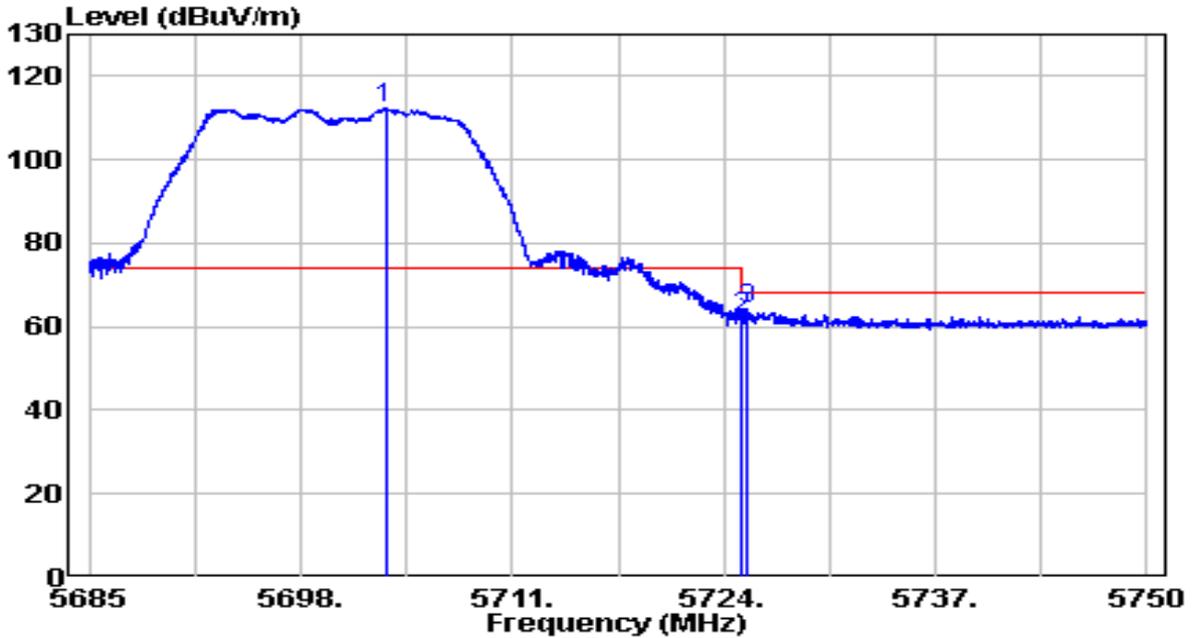


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5703.200	91.22	20.93	112.15	N/A	N/A	Peak
2	5725.000	41.07	21.00	62.07	-6.13	68.20	Peak
3	5725.365	43.08	21.00	64.08	-4.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/60Hz

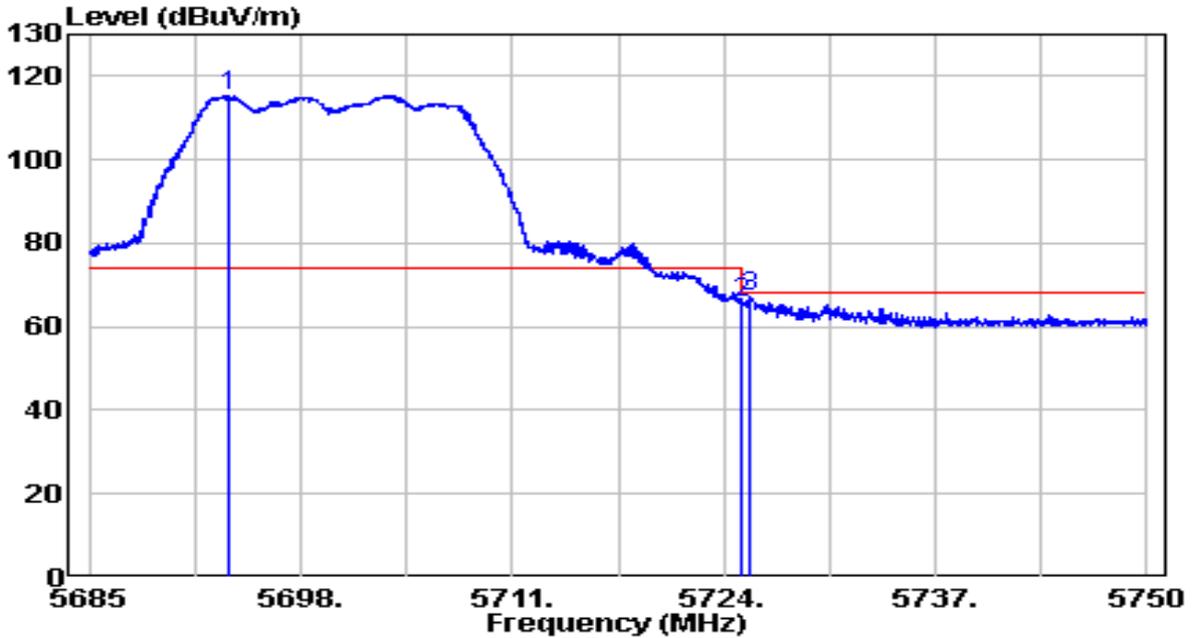


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5693.645	94.53	20.90	115.43	N/A	N/A	Peak
2		5725.000	44.96	21.00	65.96	-2.24	68.20	Peak
3	0.00	5725.625	46.41	21.00	67.41	-0.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	120V/60Hz

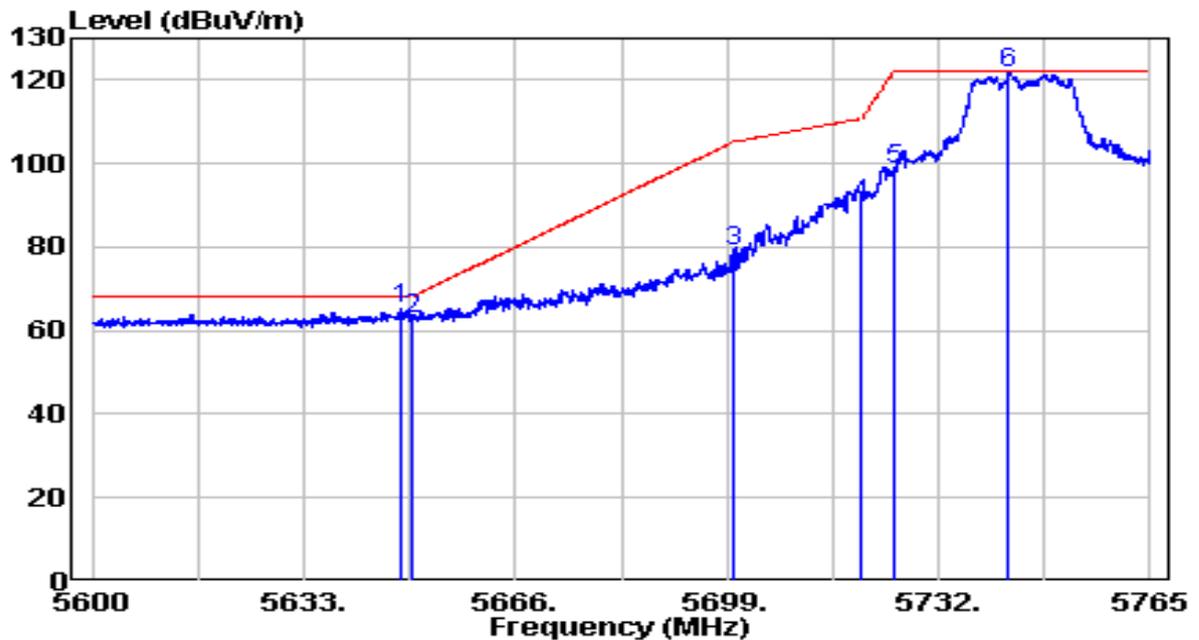


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5648.015	44.30	20.75	65.05	-3.15	68.20	Peak
2	5650.000	41.90	20.76	62.66	-5.54	68.20	Peak
3	5700.000	58.09	20.92	79.01	-26.19	105.20	Peak
4	5720.000	69.35	20.98	90.33	-20.47	110.80	Peak
5	5725.000	77.56	21.00	98.56	-23.64	122.20	Peak
6	* 5742.890	100.51	21.06	121.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	120V/60Hz

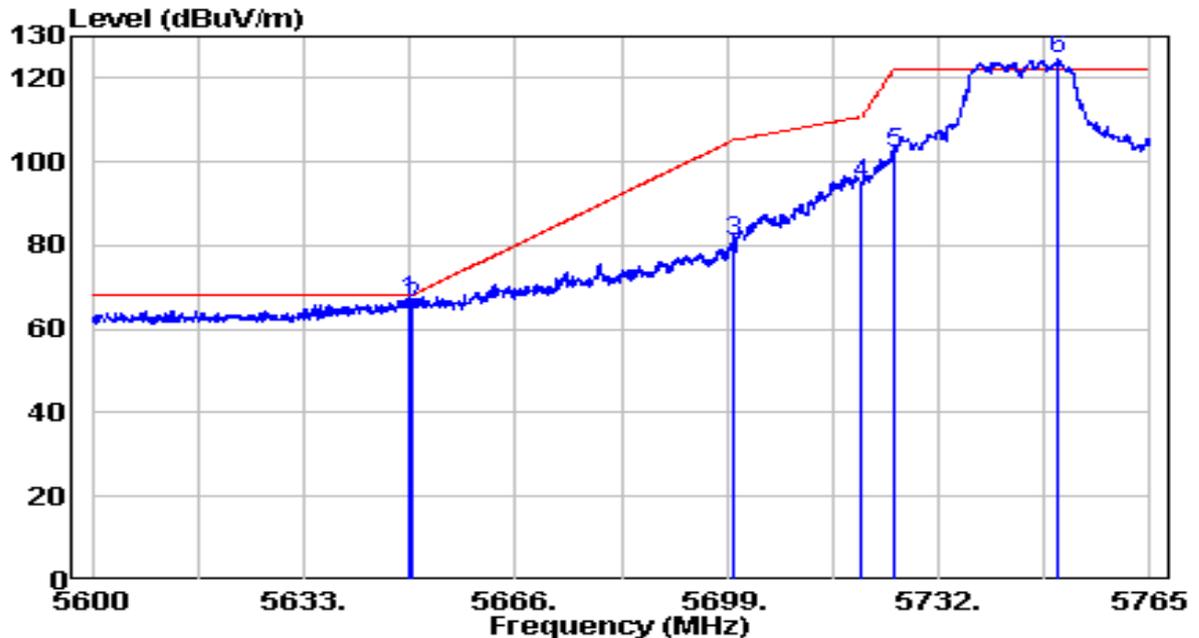


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5649.335	46.06	20.75	66.81	-1.39	68.20	Peak
2	5650.000	44.68	20.76	65.44	-2.76	68.20	Peak
3	5700.000	60.18	20.92	81.10	-24.10	105.20	Peak
4	5720.000	73.60	20.98	94.58	-16.22	110.80	Peak
5	5725.000	80.84	21.00	101.84	-20.36	122.20	Peak
6	* 5750.645	103.37	21.08	124.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	120V/60Hz

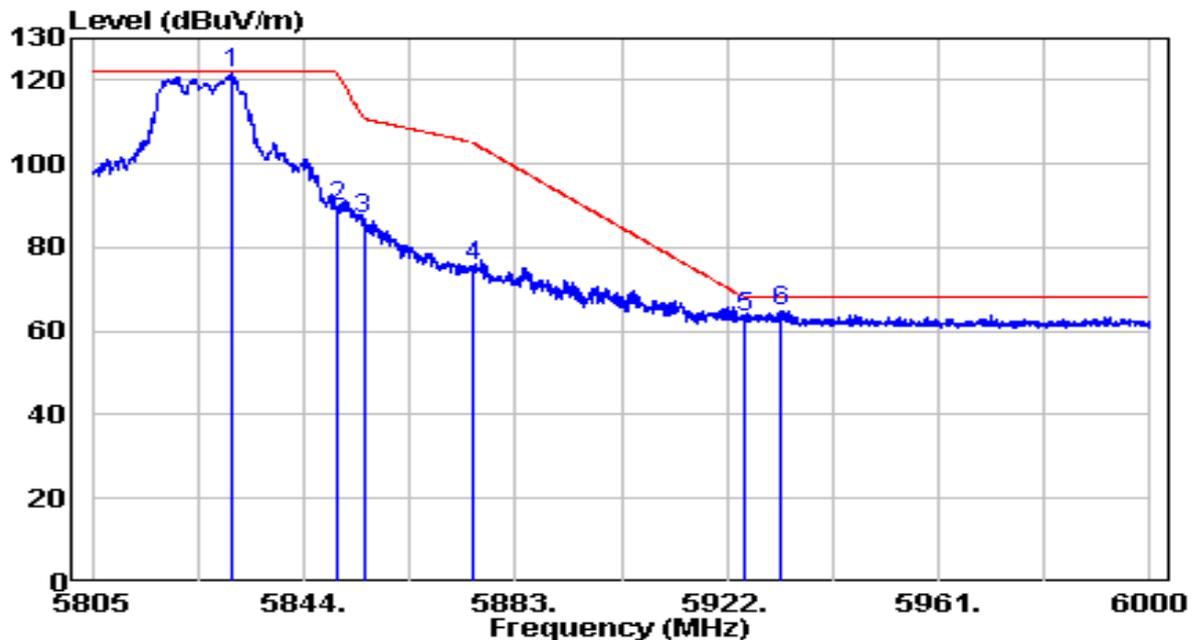


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5830.740	100.10	21.34	121.44	N/A	N/A	Peak
2	5850.000	68.19	21.40	89.59	-32.61	122.20	Peak
3	5855.000	65.43	21.42	86.85	-23.95	110.80	Peak
4	5875.000	54.10	21.49	75.59	-29.61	105.20	Peak
5	5925.000	41.60	21.65	63.25	-4.95	68.20	Peak
6	5931.945	43.27	21.67	64.94	-3.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	120V/60Hz

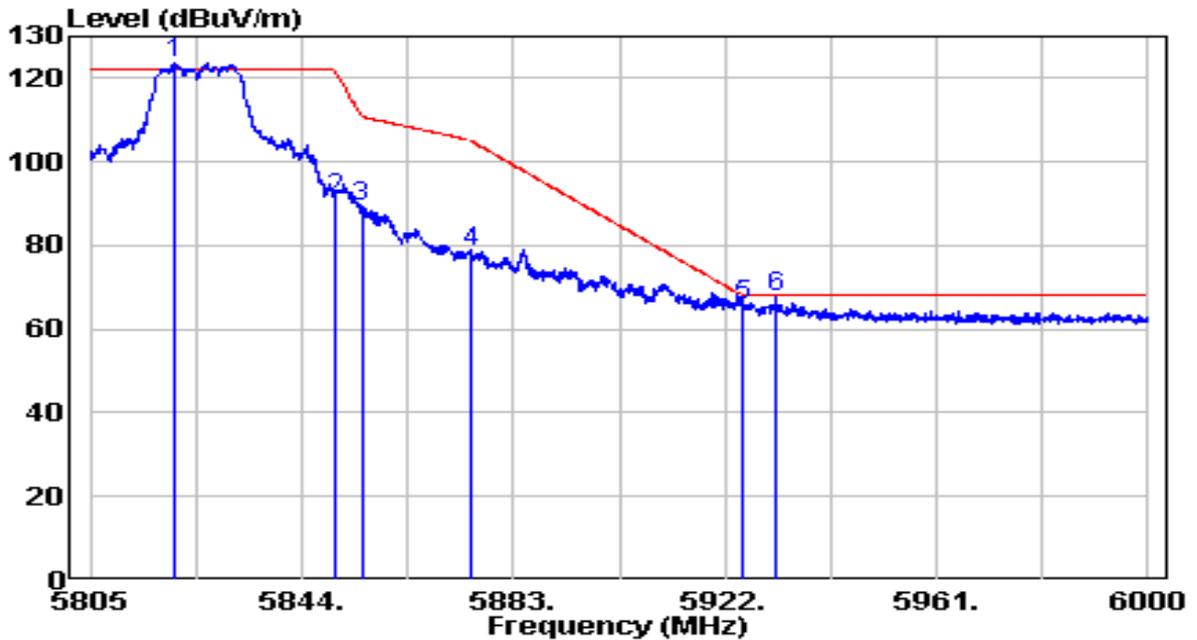


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5820.600	102.27	21.31	123.58	N/A	N/A	Peak
2	5850.000	70.05	21.40	91.45	-30.75	122.20	Peak
3	5855.000	67.83	21.42	89.25	-21.55	110.80	Peak
4	5875.000	56.78	21.49	78.26	-26.94	105.20	Peak
5	5925.000	43.99	21.65	65.64	-2.56	68.20	Peak
6	5931.555	45.90	21.67	67.57	-0.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

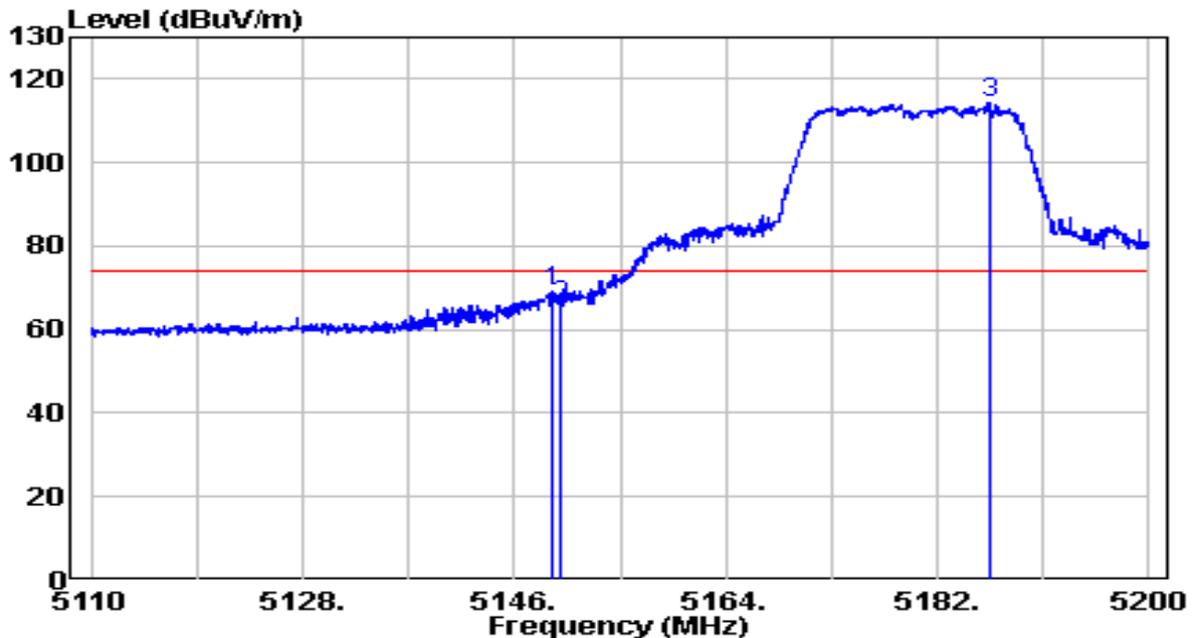


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.195	49.04	19.91	68.95	-5.05	74.00	Peak
2	5150.000	45.74	19.91	65.65	-8.35	74.00	Peak
3	* 5186.455	94.25	19.94	114.19	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

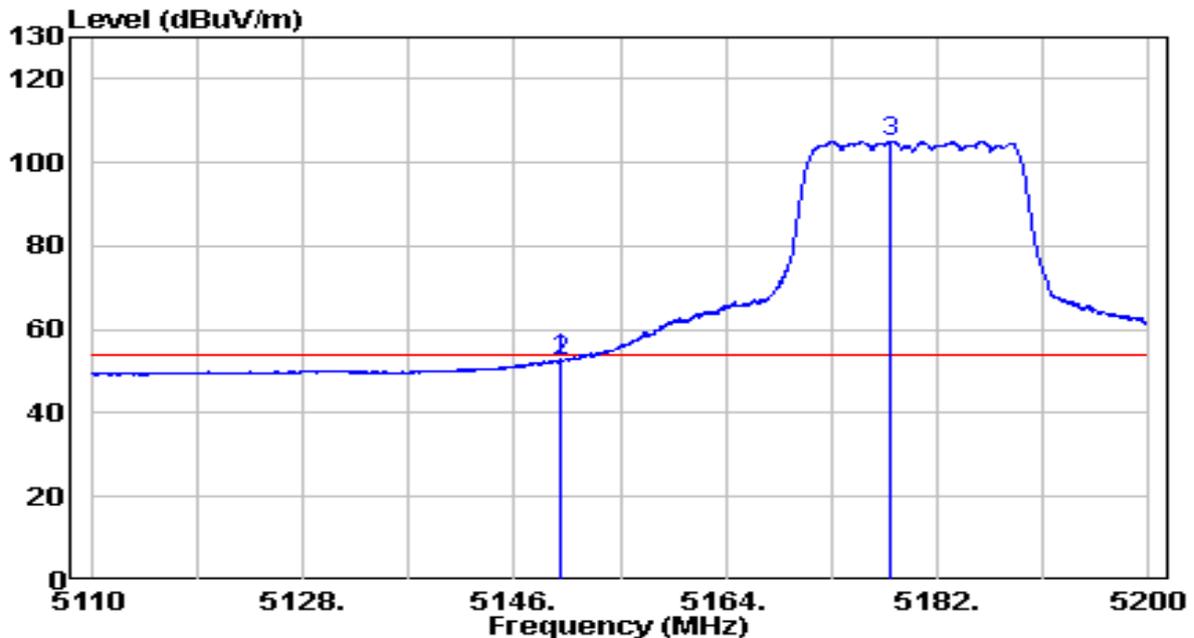


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.960	32.93	19.91	52.84	-1.16	54.00	Average
2	5150.000	32.44	19.91	52.35	-1.65	54.00	Average
3	* 5178.085	85.23	19.94	105.17	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

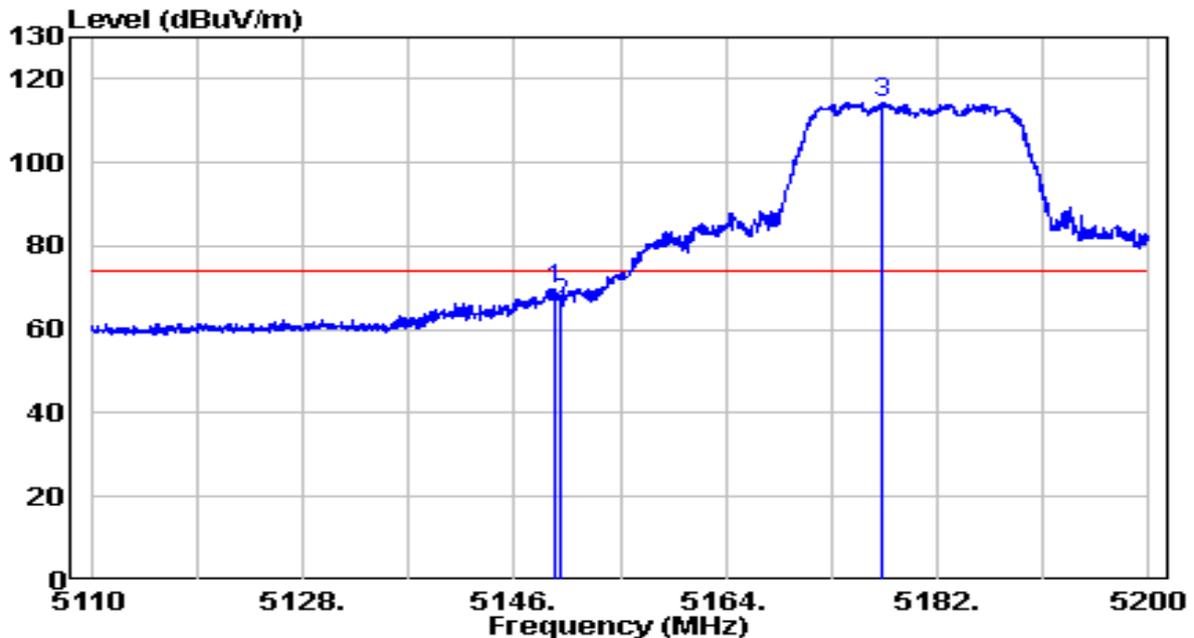


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.510	49.83	19.91	69.73	-4.27	74.00	Peak
2	5150.000	46.43	19.91	66.34	-7.66	74.00	Peak
3	* 5177.320	94.32	19.93	114.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

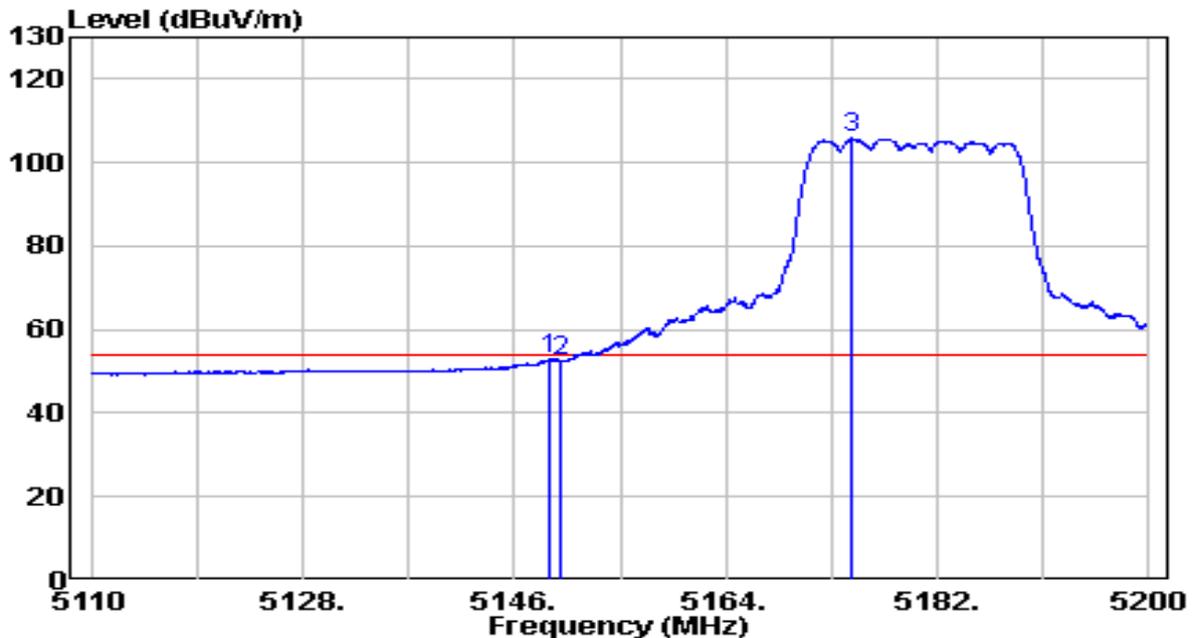


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.970	33.03	19.90	52.93	-1.07	54.00	Average
2	5150.005	32.79	19.91	52.70	-1.30	54.00	Average
3	* 5174.665	85.90	19.93	105.83	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

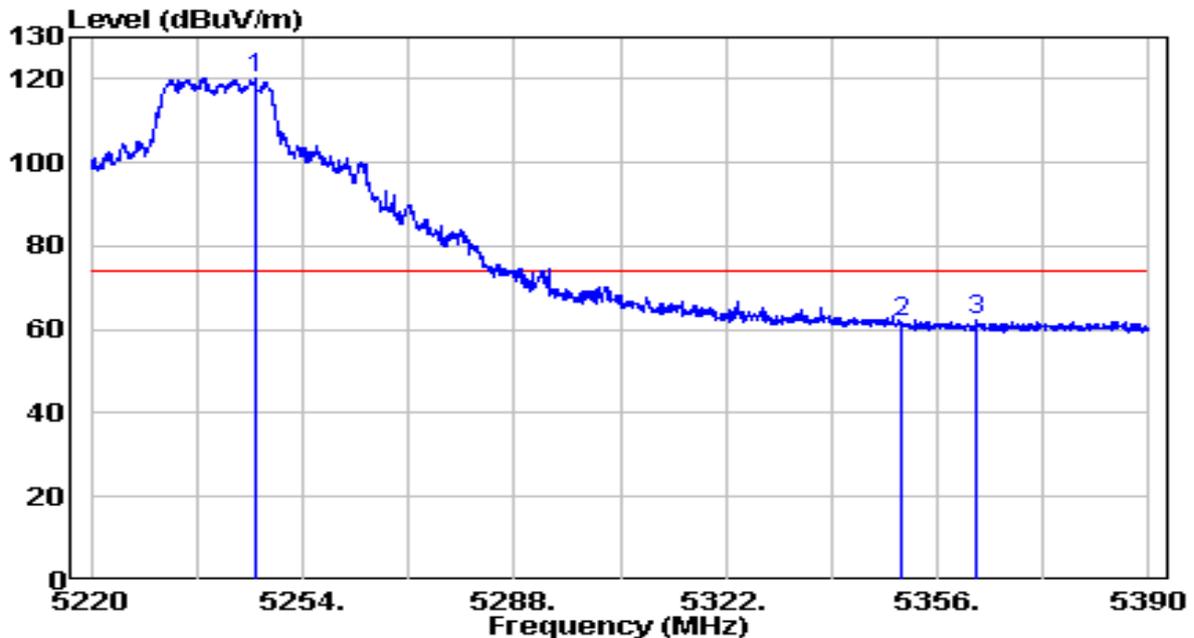


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5246.520	100.26	20.01	120.27	N/A	N/A	Peak
2	5350.000	41.68	20.11	61.79	-12.21	74.00	Peak
3	5362.120	42.33	20.13	62.46	-11.54	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

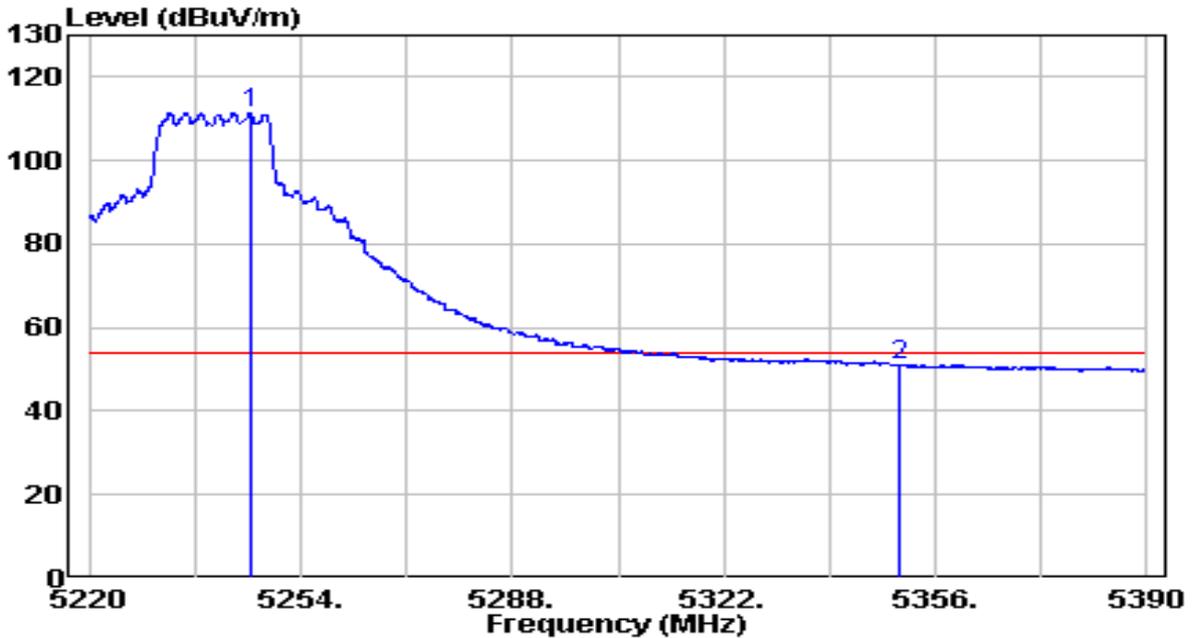


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5245.840	91.38	20.01	111.39	N/A	N/A	Average
2	5350.000	30.94	20.11	51.05	-2.95	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

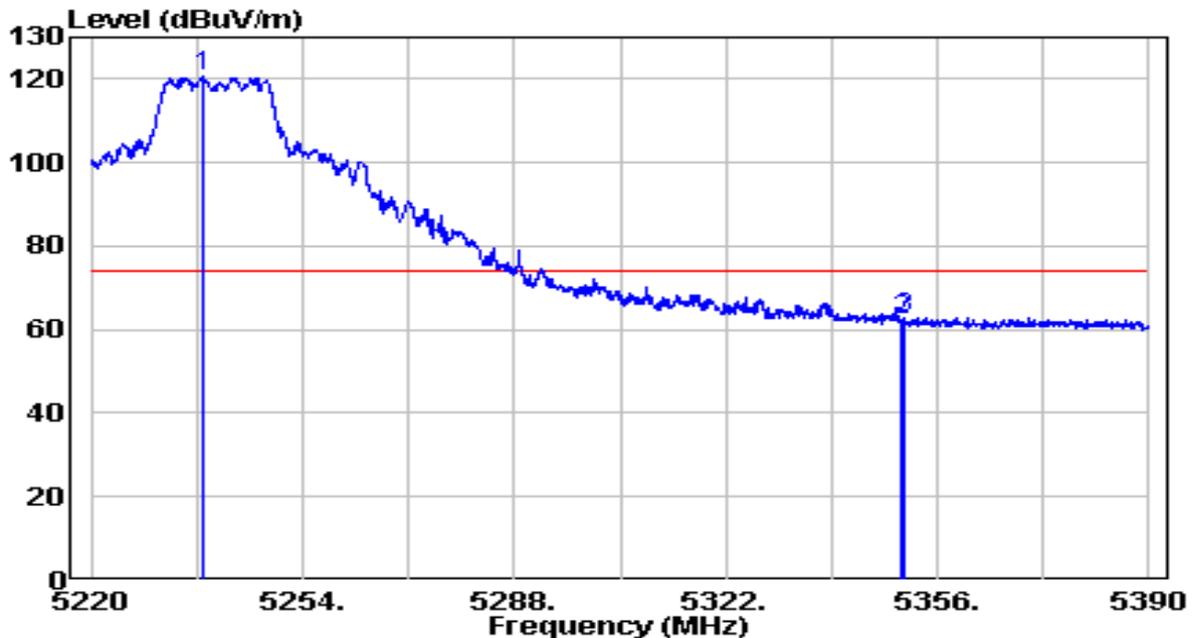


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5238.020	100.78	20.00	120.77	N/A	N/A	Peak
2	5350.000	42.09	20.11	62.20	-11.80	74.00	Peak
3	5350.475	42.83	20.11	62.94	-11.06	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

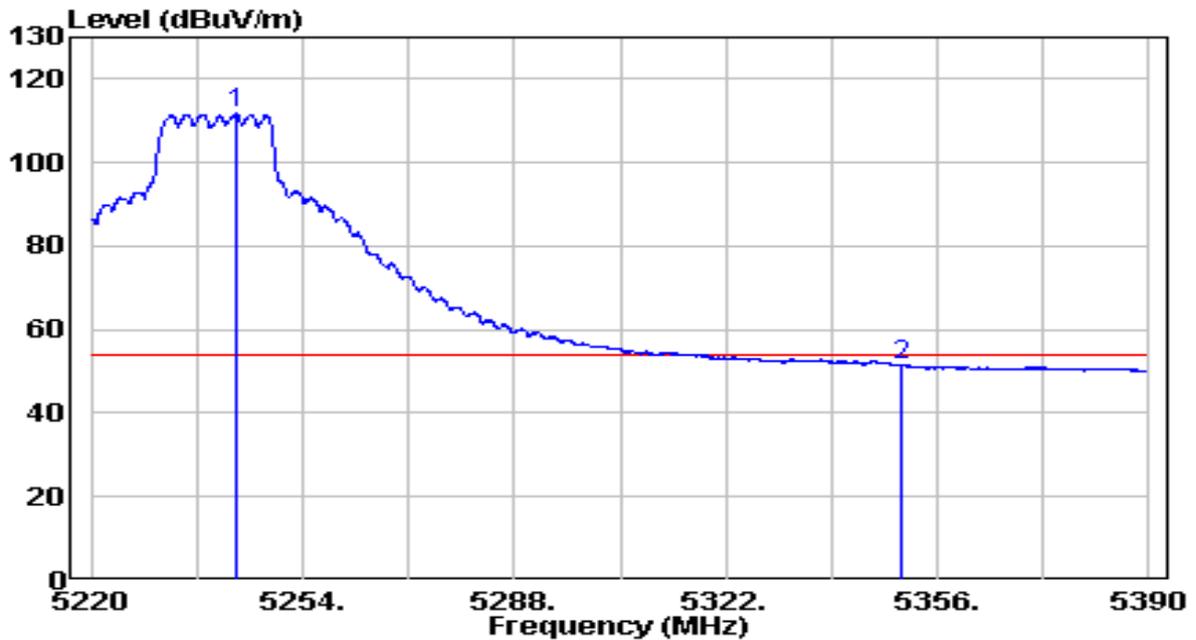


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	91.63	20.00	111.64	N/A	N/A	Average
2		31.40	20.11	51.51	-2.49	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

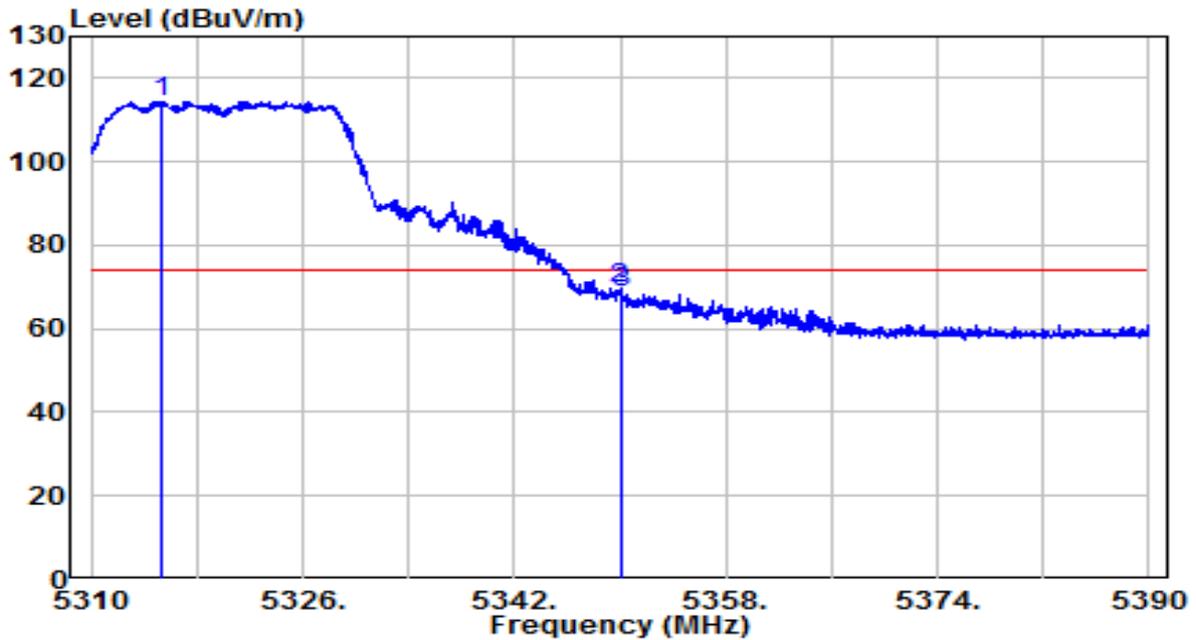


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.360	94.42	20.08	114.50	N/A	N/A	Peak
2	5350.000	49.44	20.11	69.55	-4.45	74.00	Peak
3	5350.160	48.44	20.11	68.56	-5.44	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

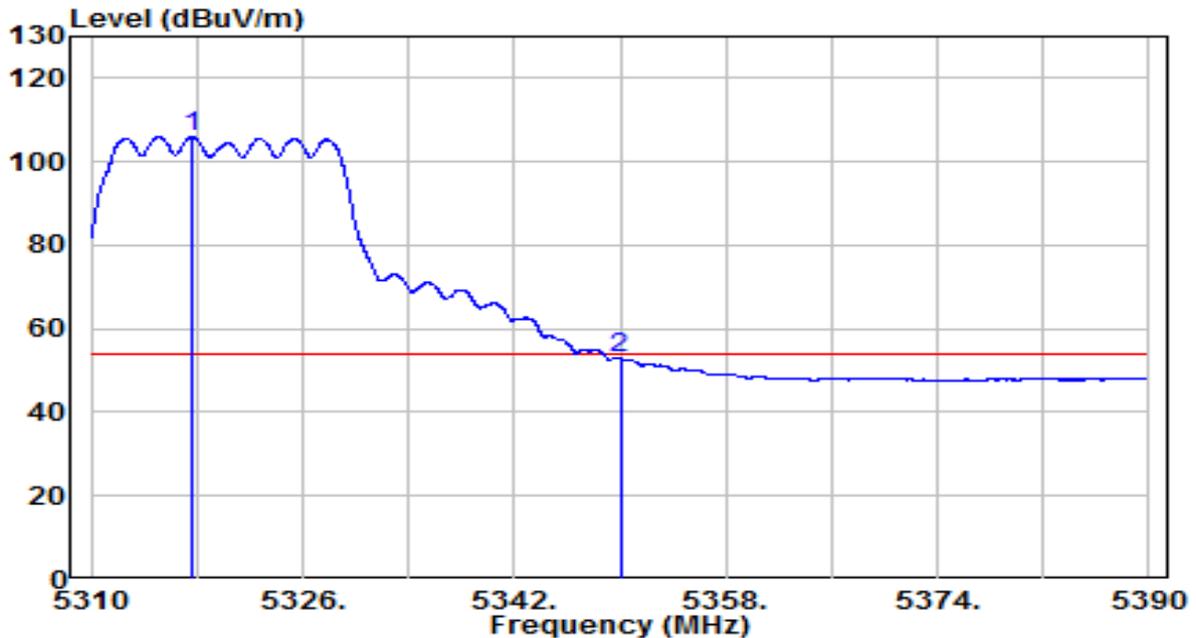


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5317.600	85.71	20.08	105.79	N/A	N/A	Average
2	5350.000	32.69	20.11	52.80	-1.20	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

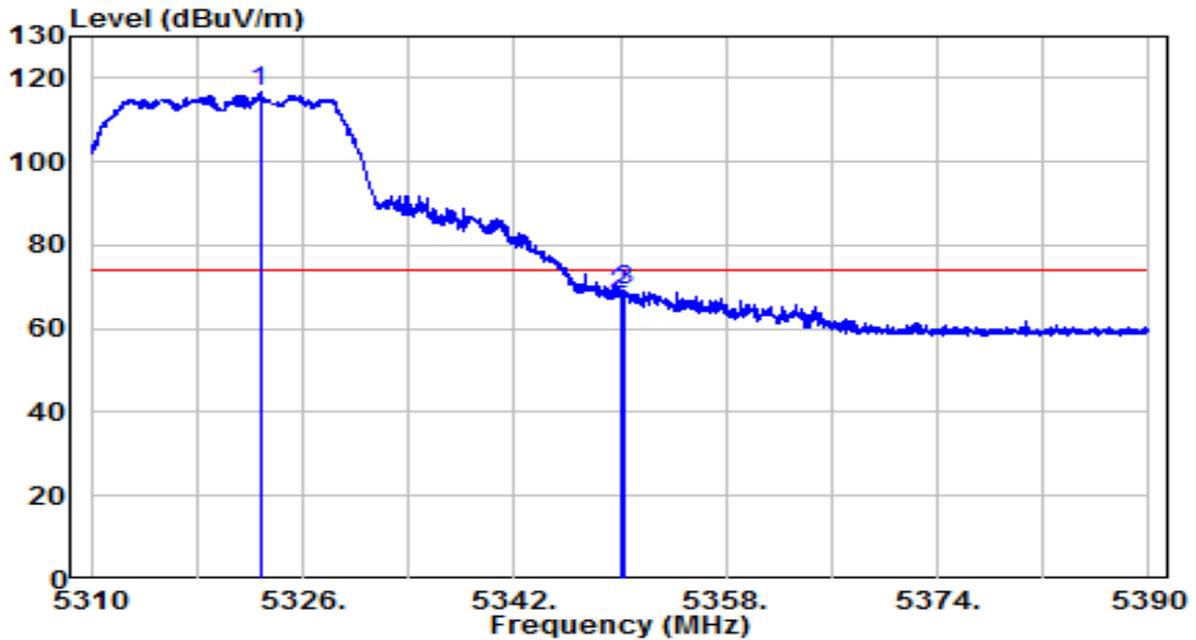


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5322.760	96.49	20.09	116.58	N/A	N/A	Peak
2	5350.000	48.24	20.11	68.35	-5.65	74.00	Peak
3	5350.400	49.04	20.11	69.15	-4.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

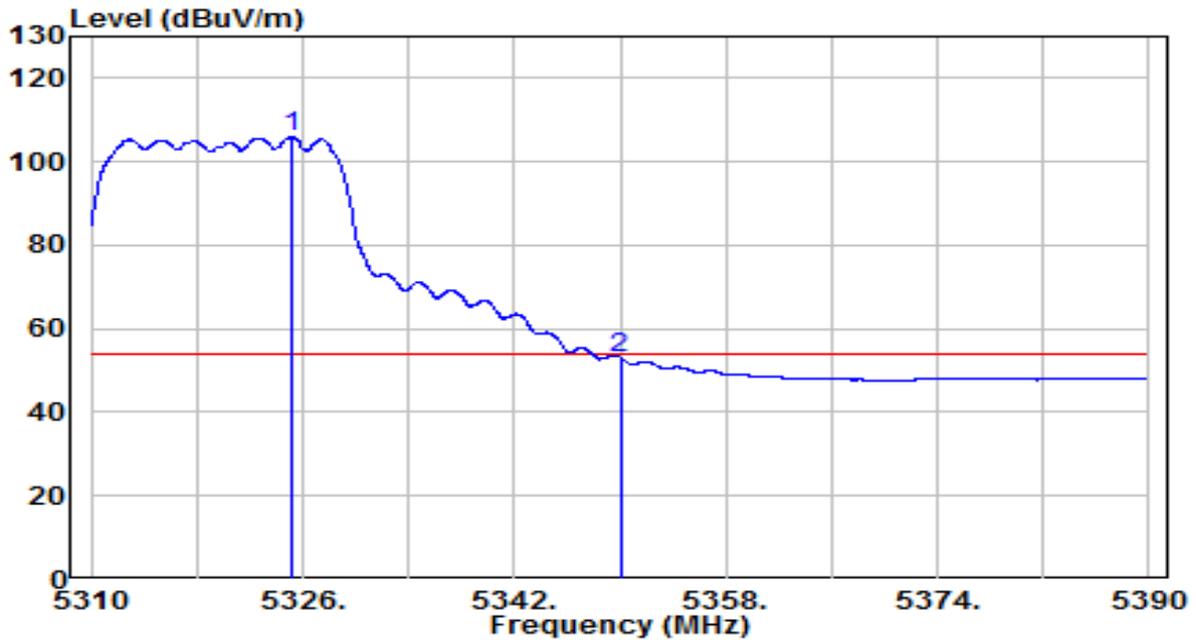


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5325.160	85.74	20.09	105.83	N/A	N/A	Average
2	5350.000	33.09	20.11	53.21	-0.79	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

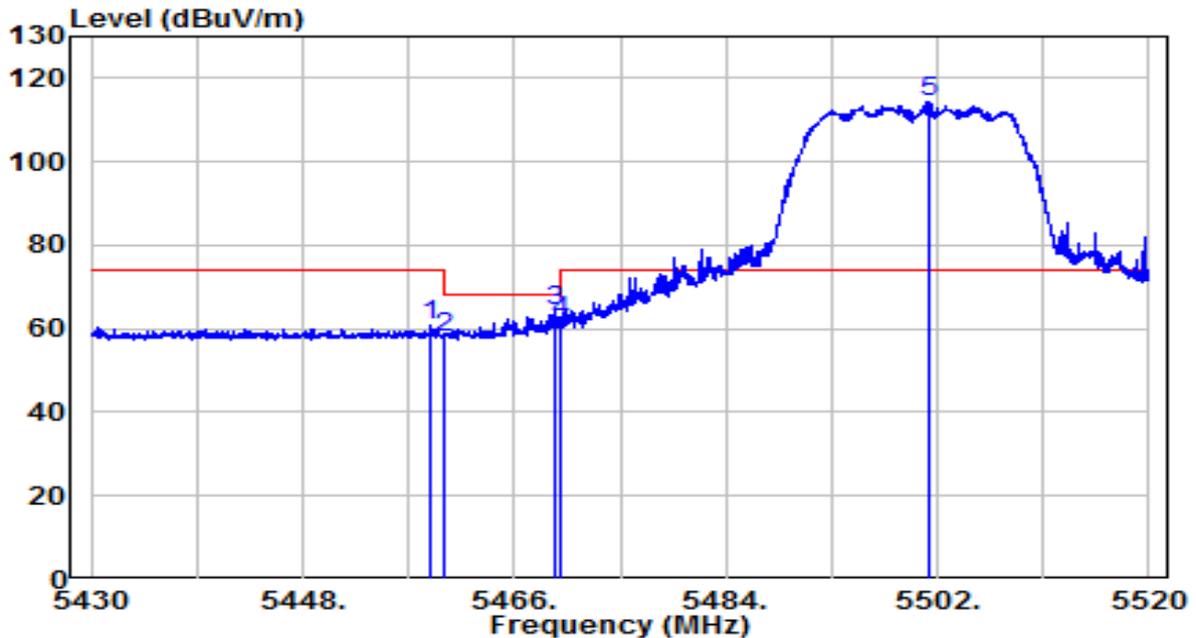


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.800	40.79	20.23	61.02	-12.98	74.00	Peak
2	5460.000	37.77	20.23	58.00	-10.20	68.20	Peak
3	5469.420	43.81	20.24	64.05	-4.15	68.20	Peak
4	5470.000	41.70	20.24	61.94	-6.26	68.20	Peak
5	* 5501.235	93.98	20.27	114.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)- Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

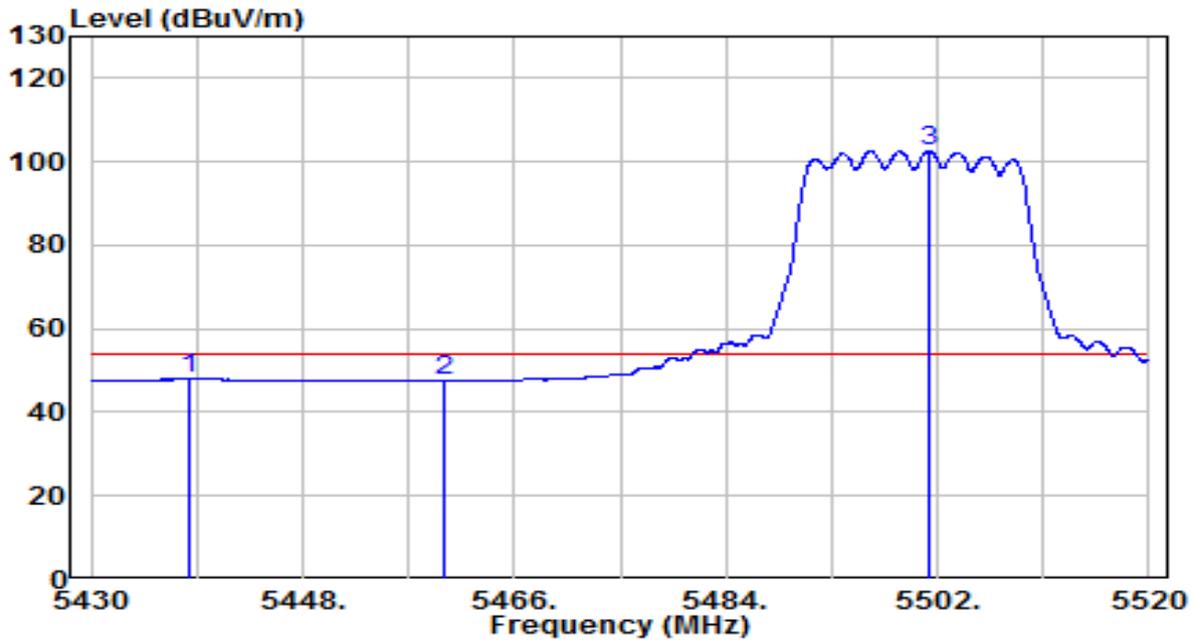


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.325	27.76	20.21	47.97	-6.03	54.00	Average
2	5460.000	27.39	20.23	47.62	-6.38	54.00	Average
3	* 5501.235	82.34	20.27	102.61	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

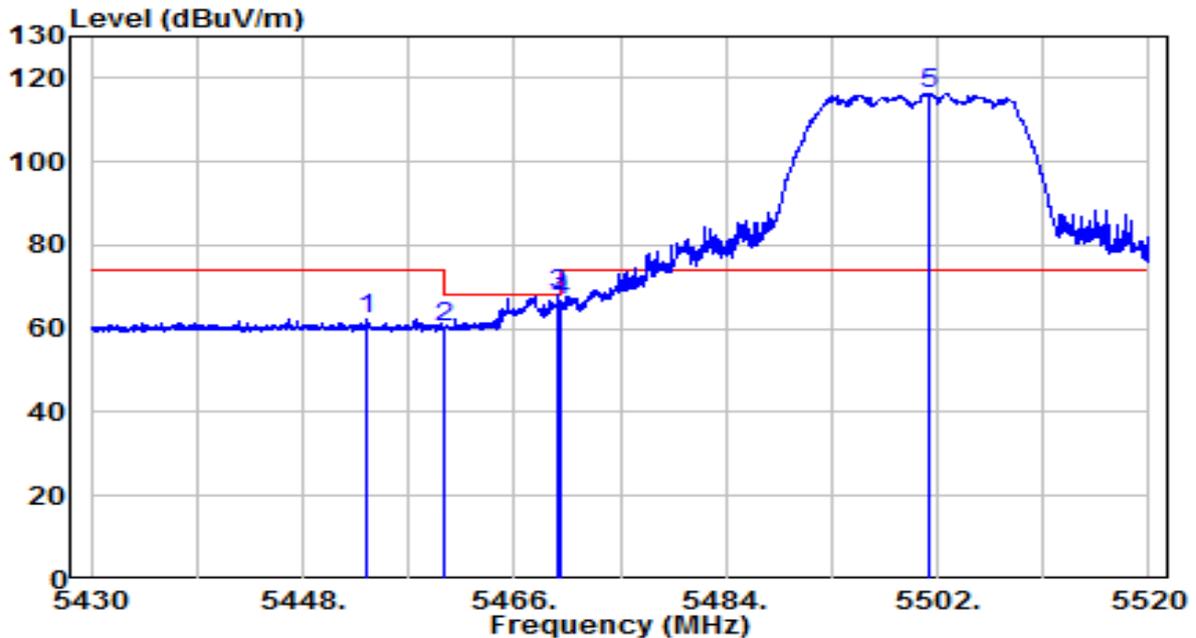


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.490	42.09	20.22	62.31	-11.69	74.00	Peak
2	5460.000	40.15	20.23	60.38	-7.82	68.20	Peak
3	5469.645	47.78	20.24	68.01	-0.19	68.20	Peak
4	5470.000	46.45	20.24	66.69	-1.51	68.20	Peak
5	* 5501.190	96.19	20.27	116.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

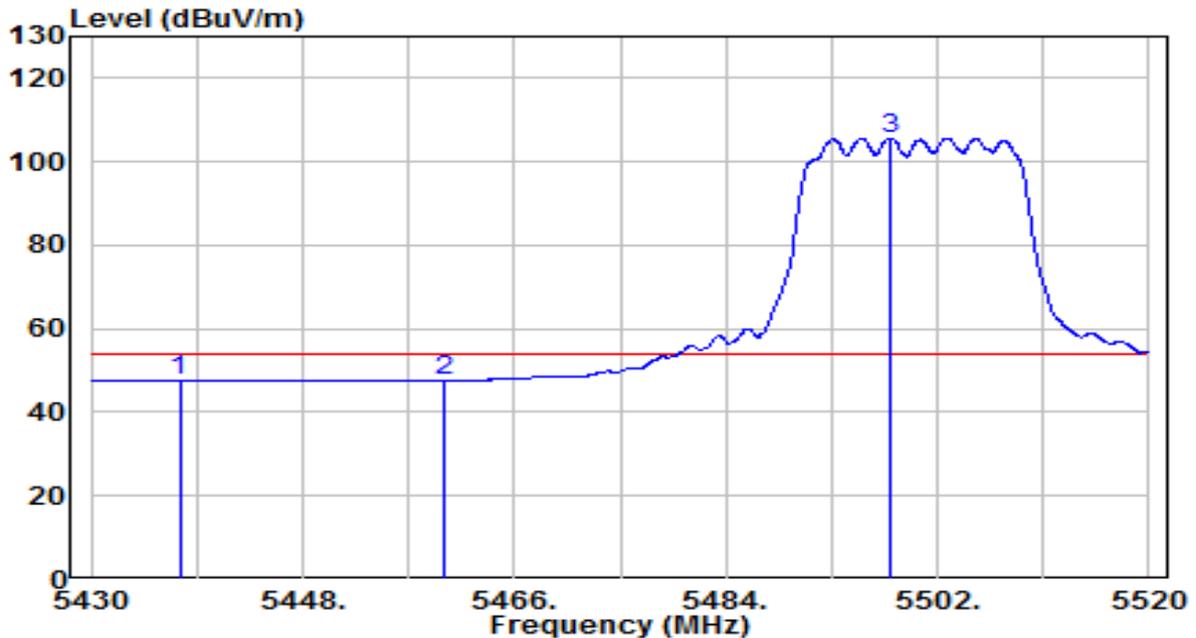


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5437.515	27.58	20.21	47.78	-6.22	54.00	Average
2	5460.000	27.50	20.23	47.72	-6.28	54.00	Average
3	* 5497.995	85.44	20.27	105.70	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/60Hz

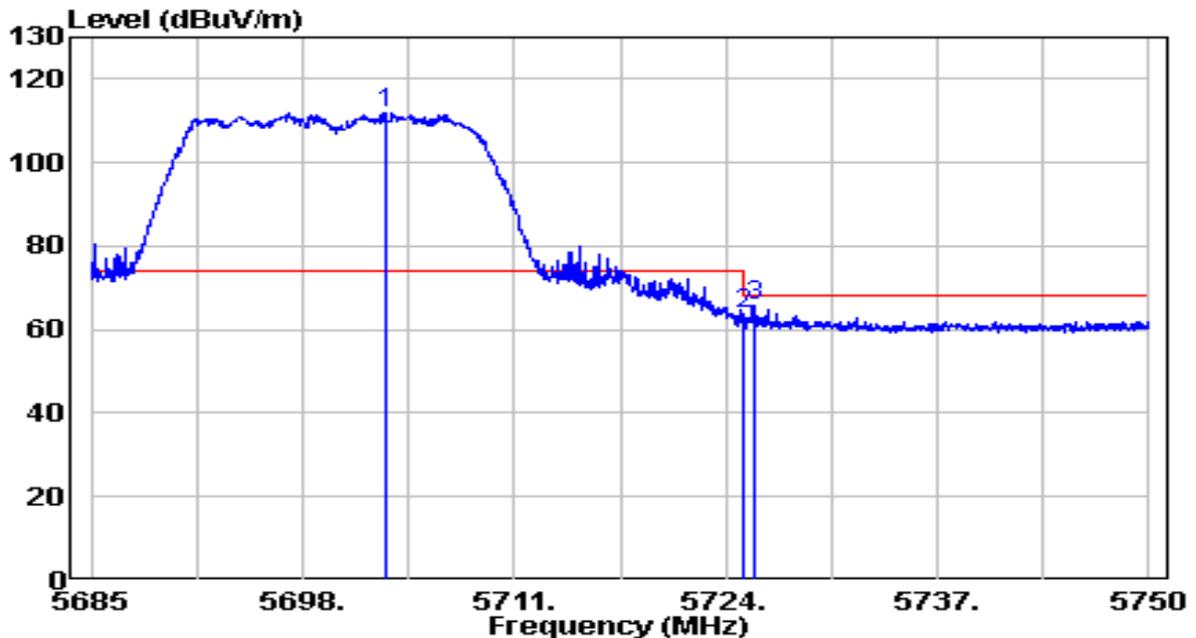


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5703.135	91.16	20.93	112.09	N/A	N/A	Peak
2	5725.000	42.84	21.00	63.84	-4.36	68.20	Peak
3	5725.690	44.83	21.00	65.83	-2.37	68.20	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/60Hz

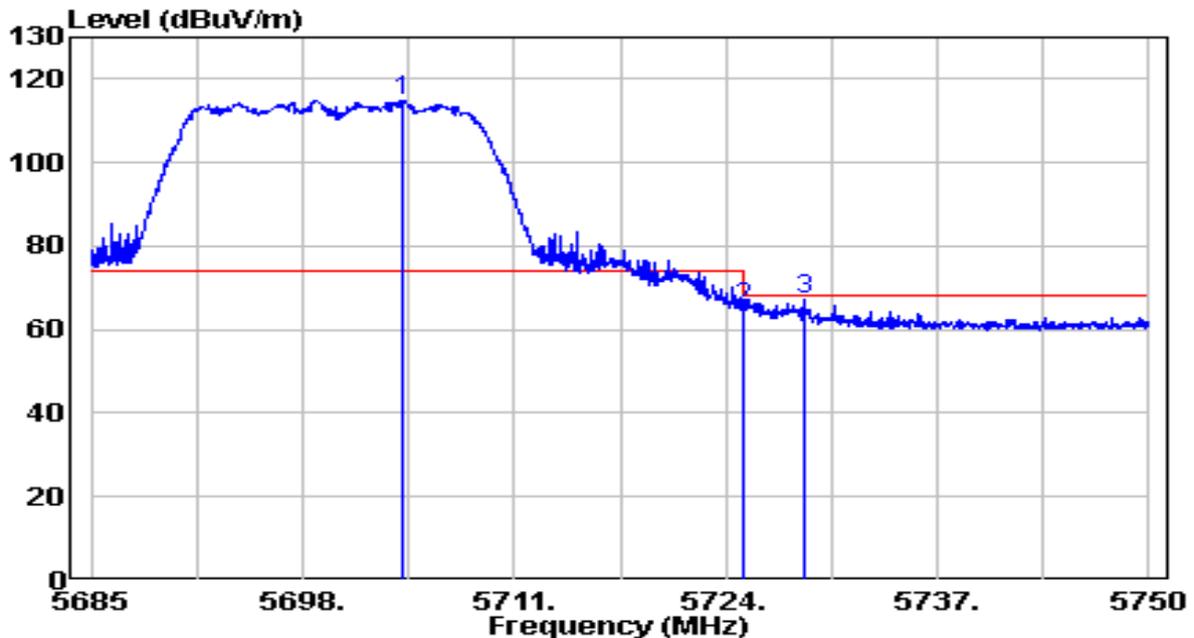


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5704.110	93.98	20.93	114.91	N/A	N/A	Peak
2	5725.000	44.34	21.00	65.33	-2.87	68.20	Peak
3	5728.875	45.99	21.01	67.00	-1.20	68.20	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz	Test Voltage	120V/60Hz

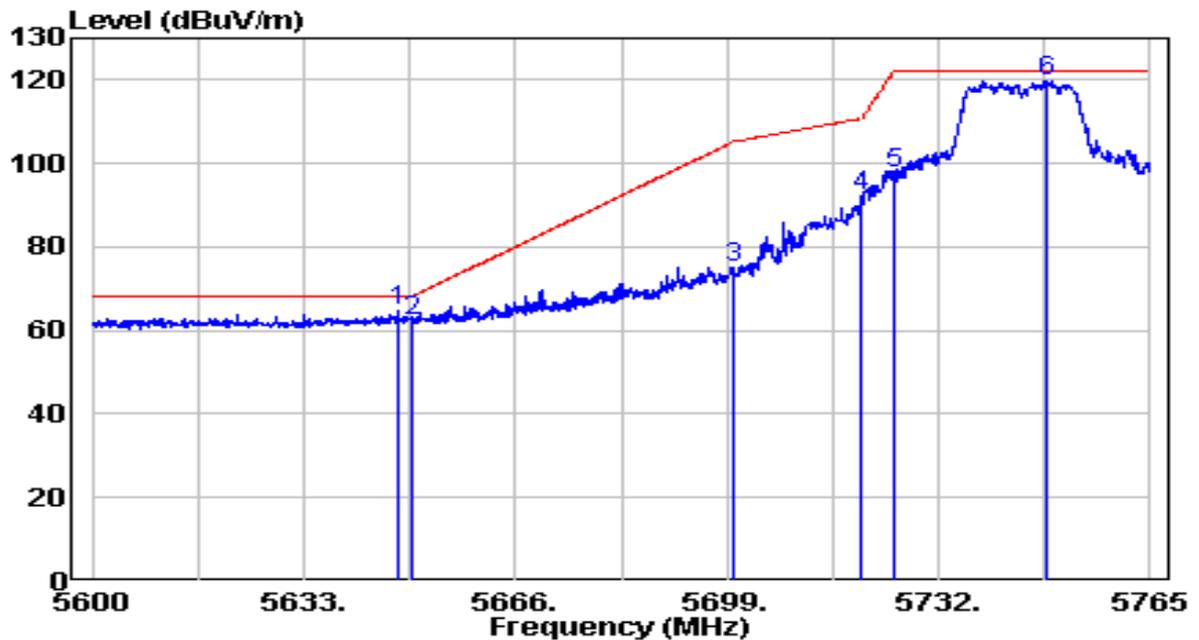


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5647.685	43.79	20.75	64.54	-3.66	68.20	Peak
2	5650.000	41.54	20.76	62.30	-5.90	68.20	Peak
3	5700.000	53.93	20.92	74.85	-30.35	105.20	Peak
4	5720.000	71.09	20.98	92.07	-18.73	110.80	Peak
5	5725.000	76.81	21.00	97.81	-24.39	122.20	Peak
6	* 5748.665	98.39	21.08	119.47	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz	Test Voltage	120V/60Hz

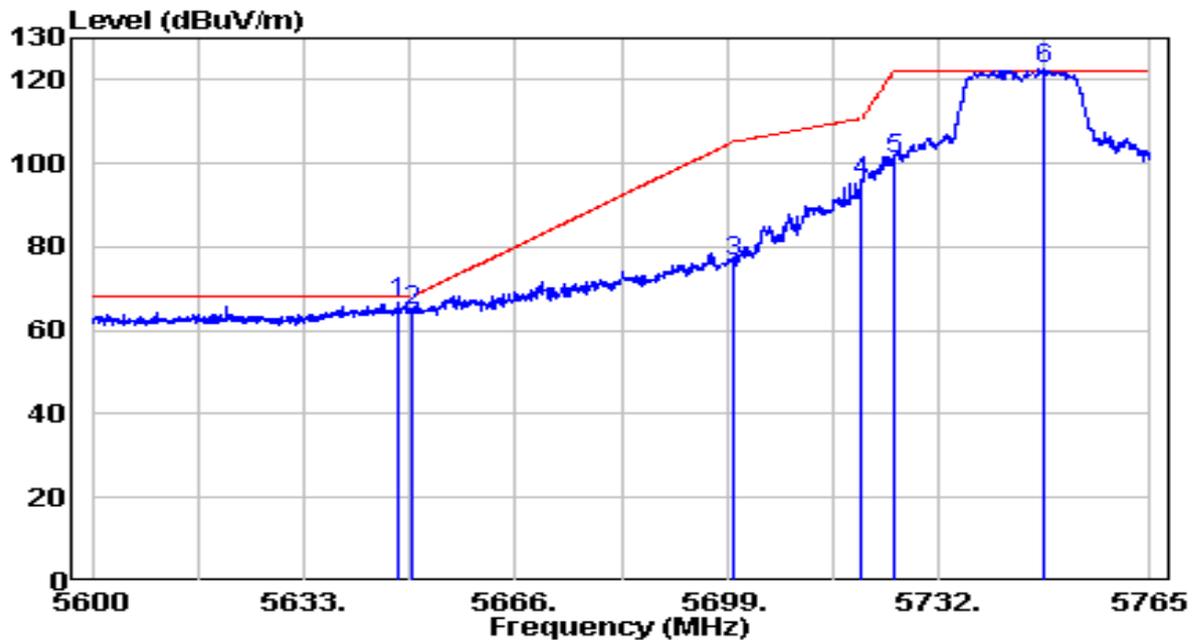


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5647.850	45.80	20.75	66.55	-1.65	68.20	Peak
2	5650.000	43.94	20.76	64.70	-3.50	68.20	Peak
3	5700.000	55.54	20.92	76.46	-28.74	105.20	Peak
4	5720.000	74.65	20.98	95.63	-15.17	110.80	Peak
5	5725.000	80.16	21.00	101.16	-21.04	122.20	Peak
6	* 5748.500	101.43	21.08	122.51	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz	Test Voltage	120V/60Hz

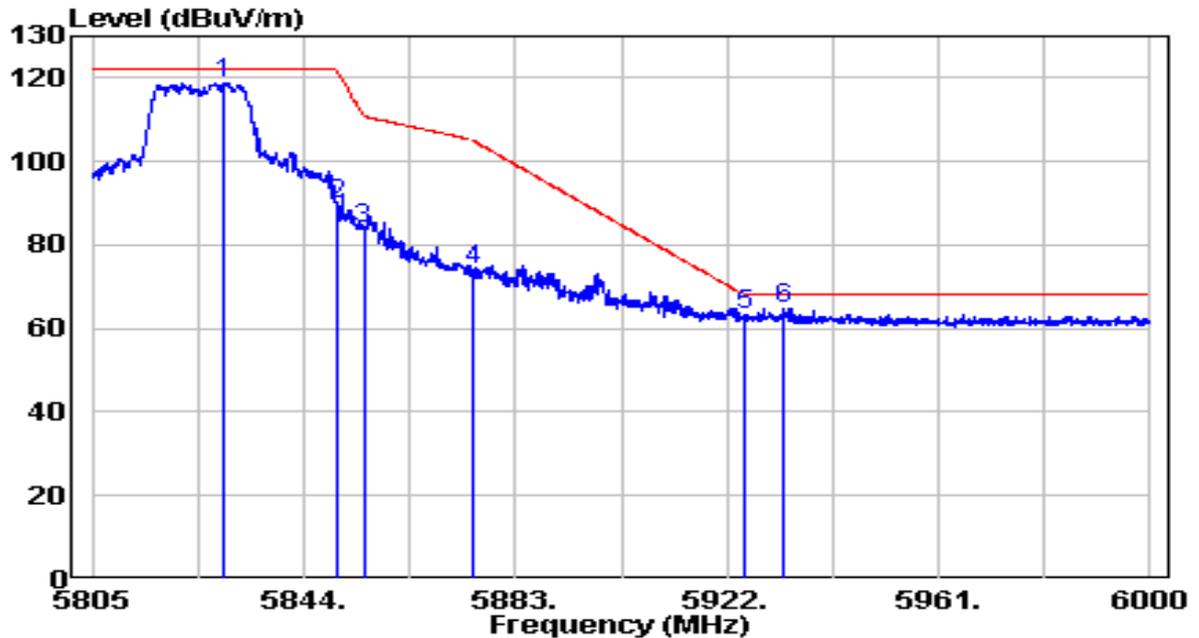


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5829.375	97.49	21.34	118.83	N/A	N/A	Peak
2	5850.000	68.36	21.40	89.76	-32.44	122.20	Peak
3	5855.000	62.35	21.42	83.77	-27.03	110.80	Peak
4	5875.000	52.60	21.49	74.08	-31.12	105.20	Peak
5	5925.000	41.71	21.65	63.36	-4.84	68.20	Peak
6	* 5932.530	43.28	21.67	64.95	-3.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz	Test Voltage	120V/60Hz

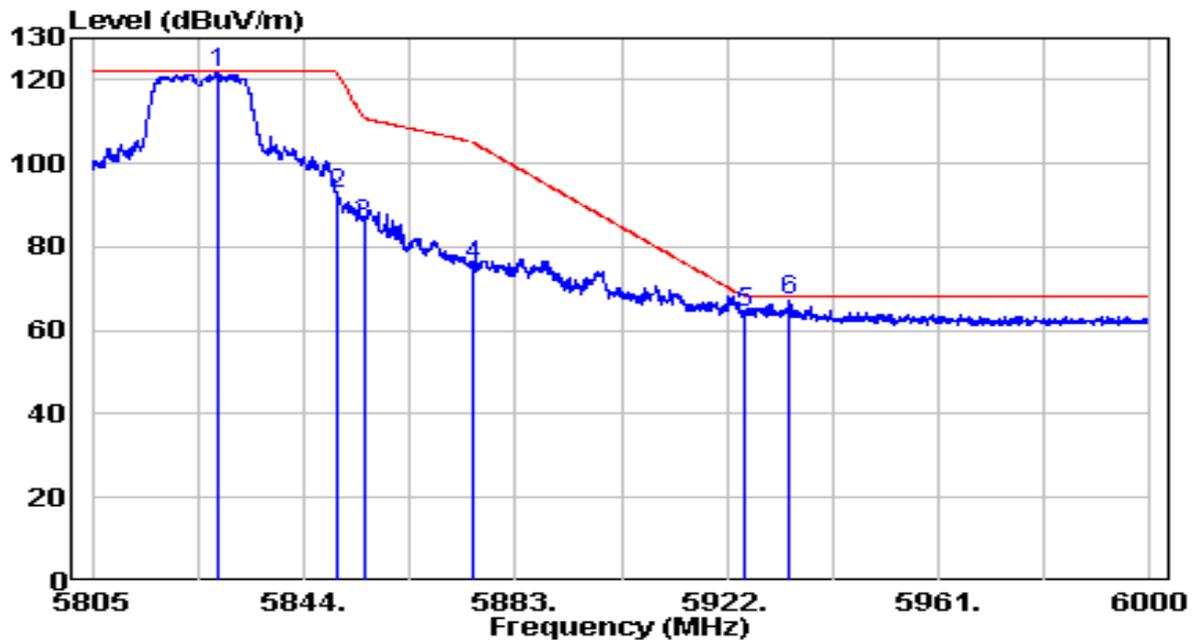


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5828.010	100.26	21.33	121.59	N/A	N/A	Peak
2	5850.000	71.50	21.40	92.90	-29.30	122.20	Peak
3	5855.000	63.85	21.42	85.27	-25.53	110.80	Peak
4	5875.000	54.21	21.49	75.69	-29.51	105.20	Peak
5	5925.000	42.62	21.65	64.27	-3.93	68.20	Peak
6	5933.505	45.50	21.67	67.17	-1.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	120V/60Hz

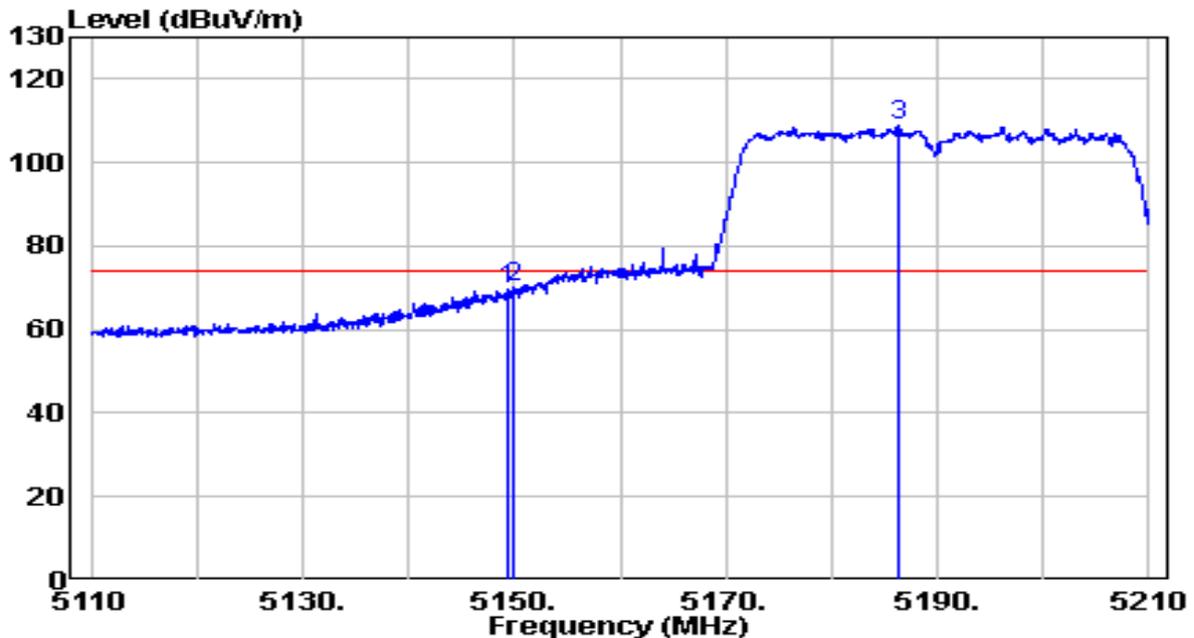


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.350	49.85	19.91	69.75	-4.25	74.00	Peak
2	5150.000	50.20	19.91	70.11	-3.89	74.00	Peak
3	* 5186.250	88.88	19.94	108.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	120V/60Hz

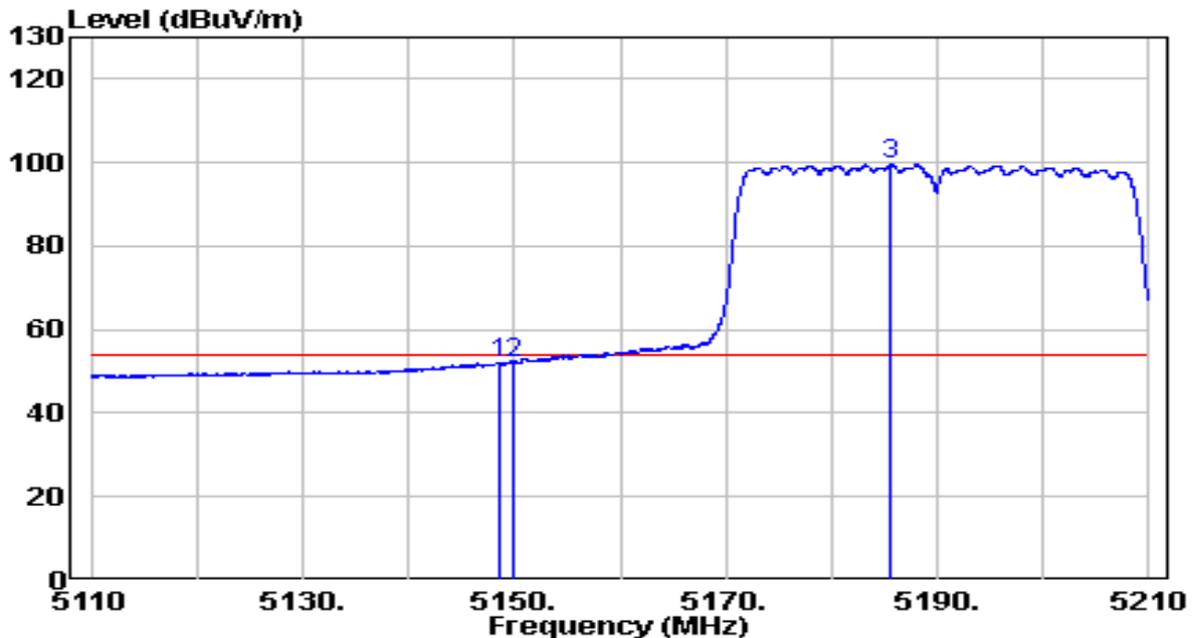


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.550	32.25	19.90	52.15	-1.85	54.00	Average
2	5150.000	32.29	19.91	52.20	-1.80	54.00	Average
3	* 5185.600	79.59	19.94	99.54	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	120V/60Hz

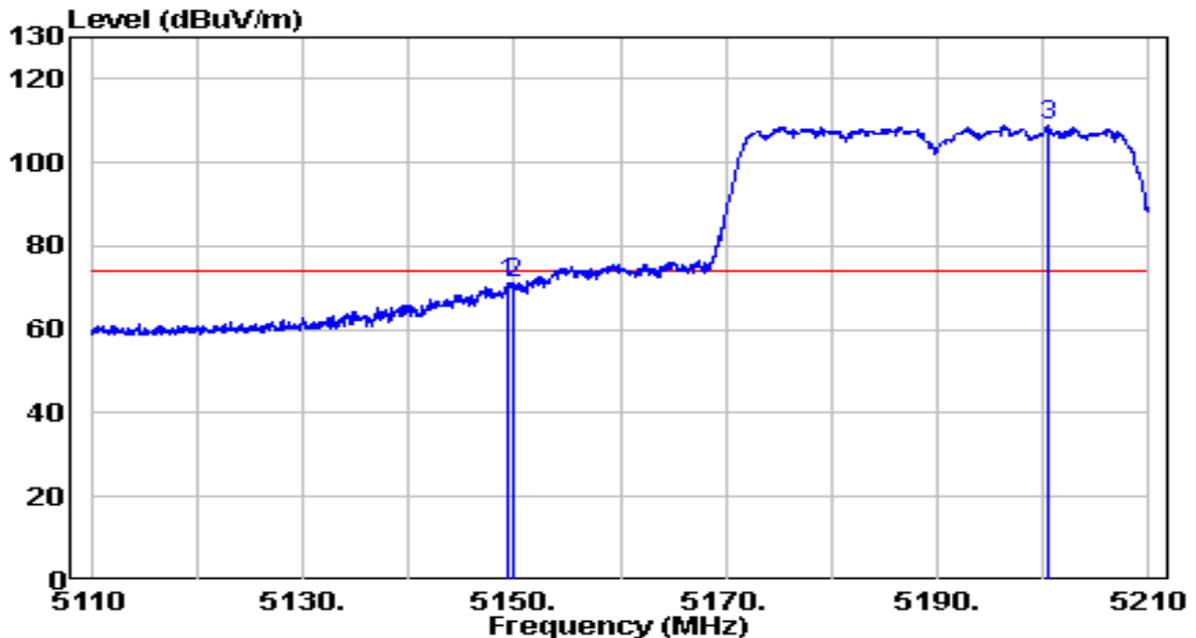


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.350	51.09	19.91	70.99	-3.01	74.00	Peak
2	5150.000	51.00	19.91	70.91	-3.09	74.00	Peak
3	* 5200.450	88.86	19.96	108.82	N/A	N/A	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	120V/60Hz

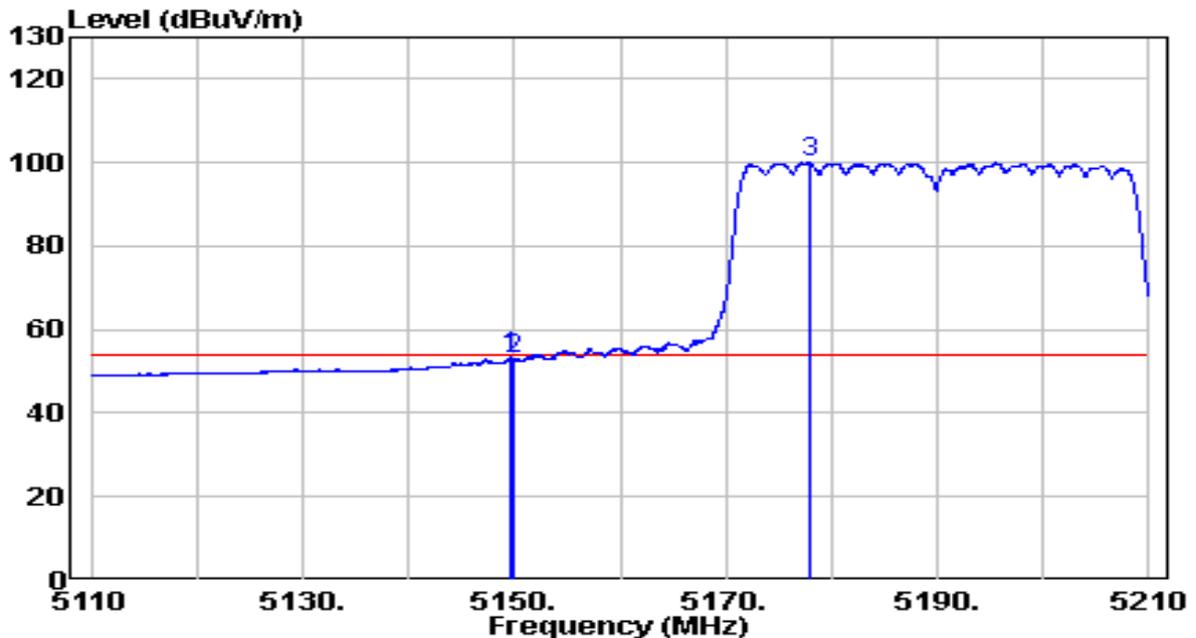


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.700	33.35	19.91	53.25	-0.75	54.00	Average
2	5150.000	33.12	19.91	53.03	-0.97	54.00	Average
3	* 5177.950	79.99	19.94	99.92	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	120V/60Hz

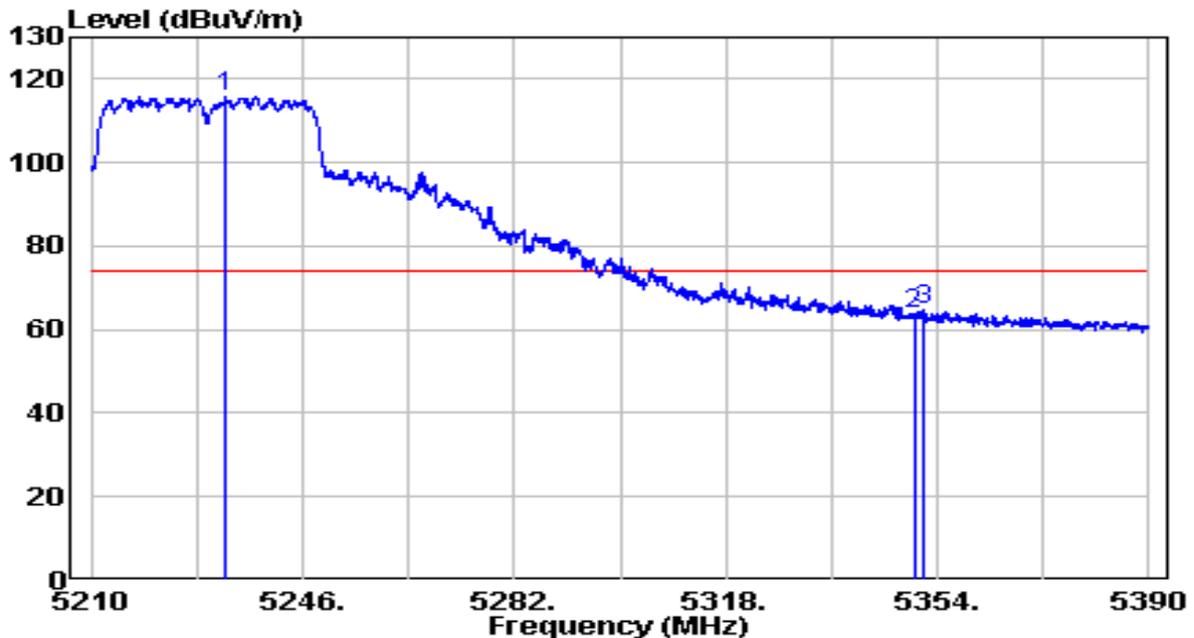


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	95.98	19.99	115.98	N/A	N/A	Peak
2		43.72	20.11	63.84	-10.16	74.00	Peak
3		44.47	20.12	64.59	-9.41	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	120V/60Hz

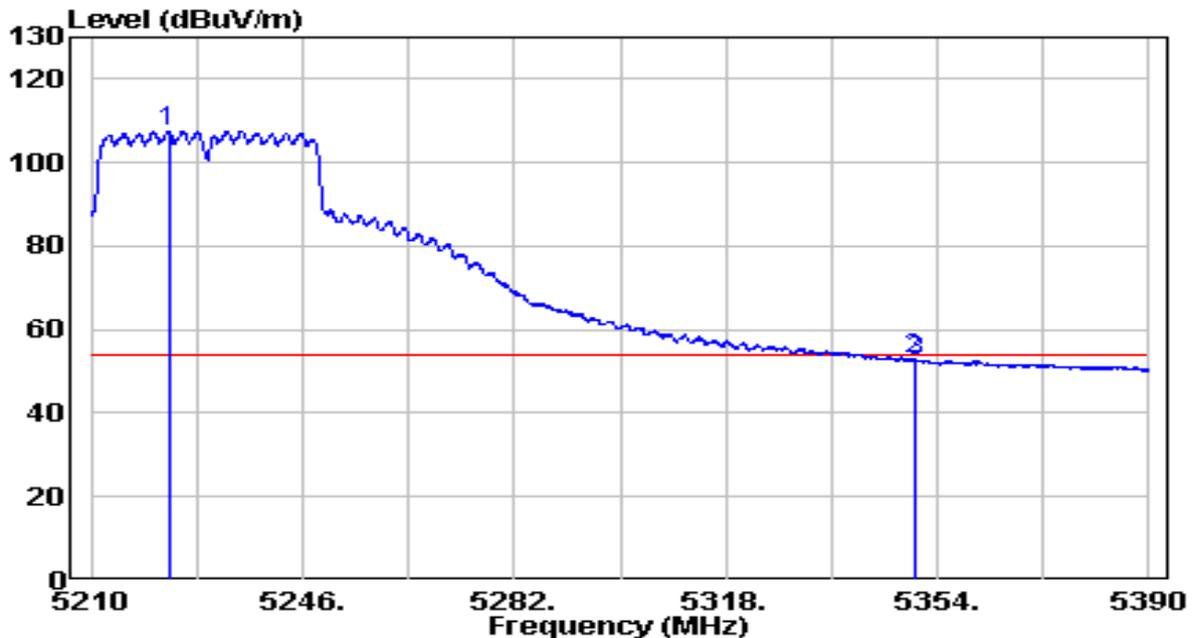


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5223.140	87.68	19.98	107.66	N/A	N/A	Average
2	5350.000	32.66	20.11	52.78	-1.22	54.00	Average
3	5350.400	32.59	20.11	52.70	-1.30	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	120V/60Hz

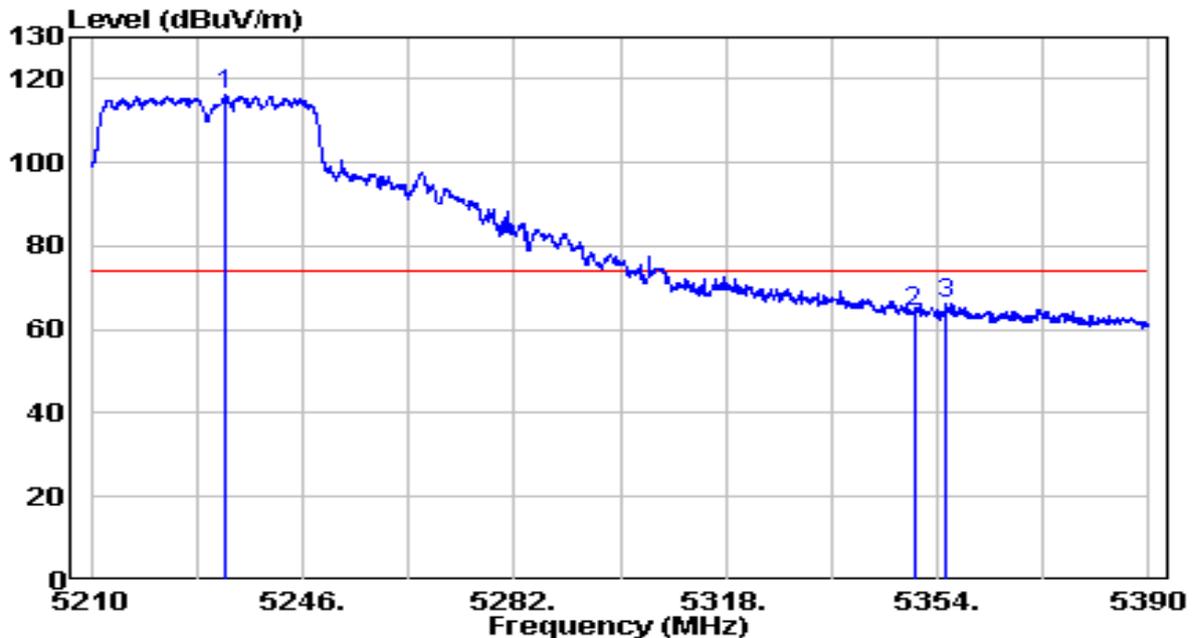


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)	
1	*	5232.770	96.34	19.99	116.33	N/A	N/A	Peak
2		5350.000	43.95	20.11	64.06	-9.94	74.00	Peak
3		5355.620	46.21	20.12	66.33	-7.67	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	120V/60Hz

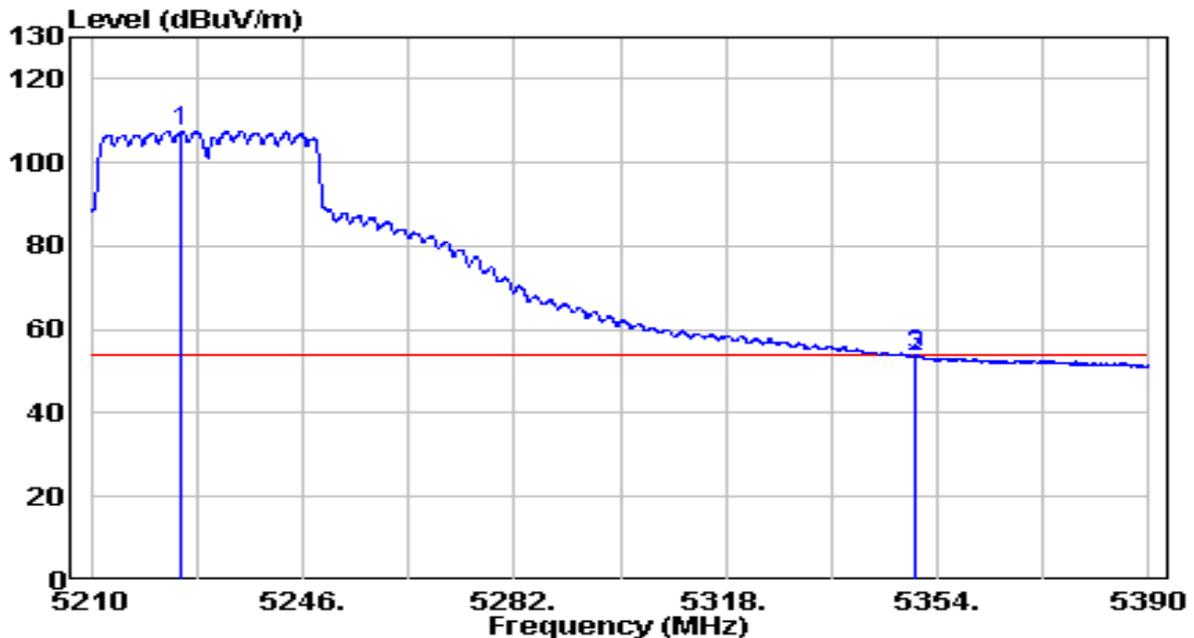


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5225.390	87.63	19.98	107.62	N/A	N/A	Average
2	5350.040	33.49	20.11	53.60	-0.40	54.00	Average
3	5350.310	33.67	20.11	53.79	-0.21	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	120V/60Hz

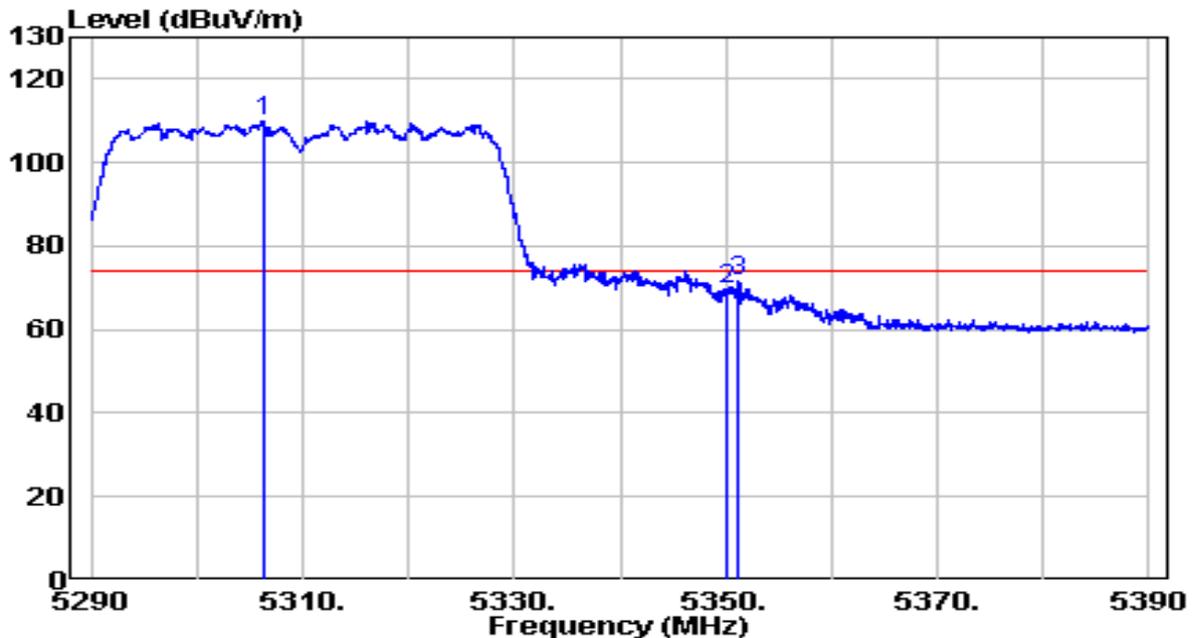


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5306.300	89.80	20.07	109.87	N/A	N/A	Peak
2	5350.000	49.53	20.11	69.65	-4.35	74.00	Peak
3	5351.200	51.33	20.12	71.45	-2.55	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	120V/60Hz

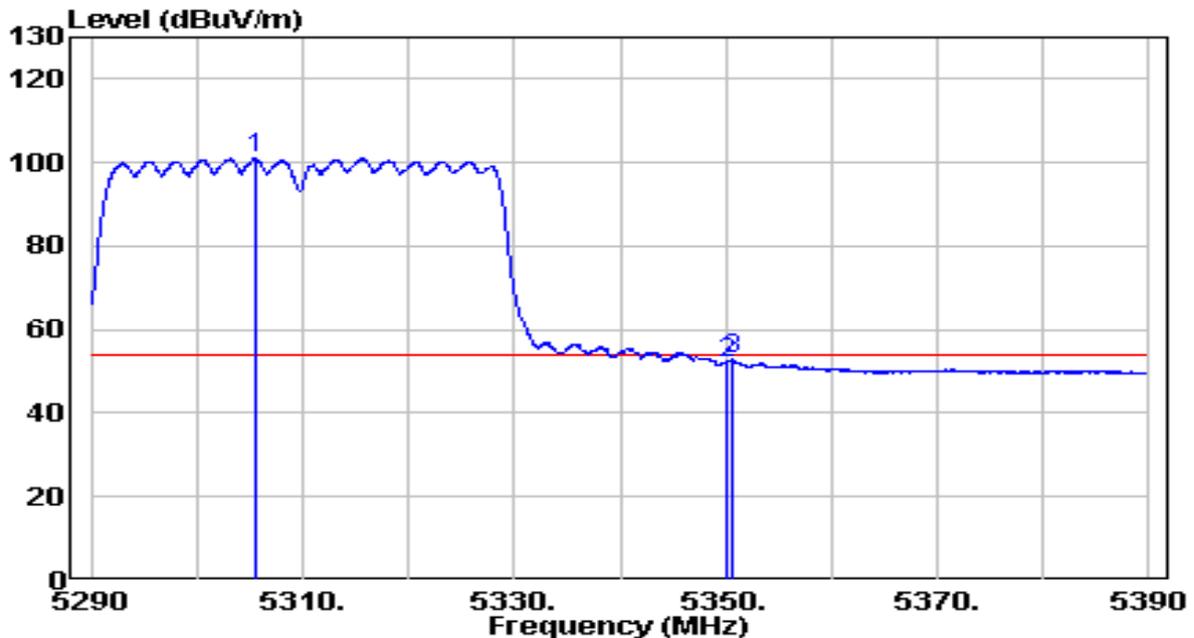


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5305.450	80.88	20.07	100.95	N/A	N/A	Average
2	5350.000	31.92	20.11	52.04	-1.96	54.00	Average
3	5350.550	32.77	20.11	52.89	-1.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	120V/60Hz

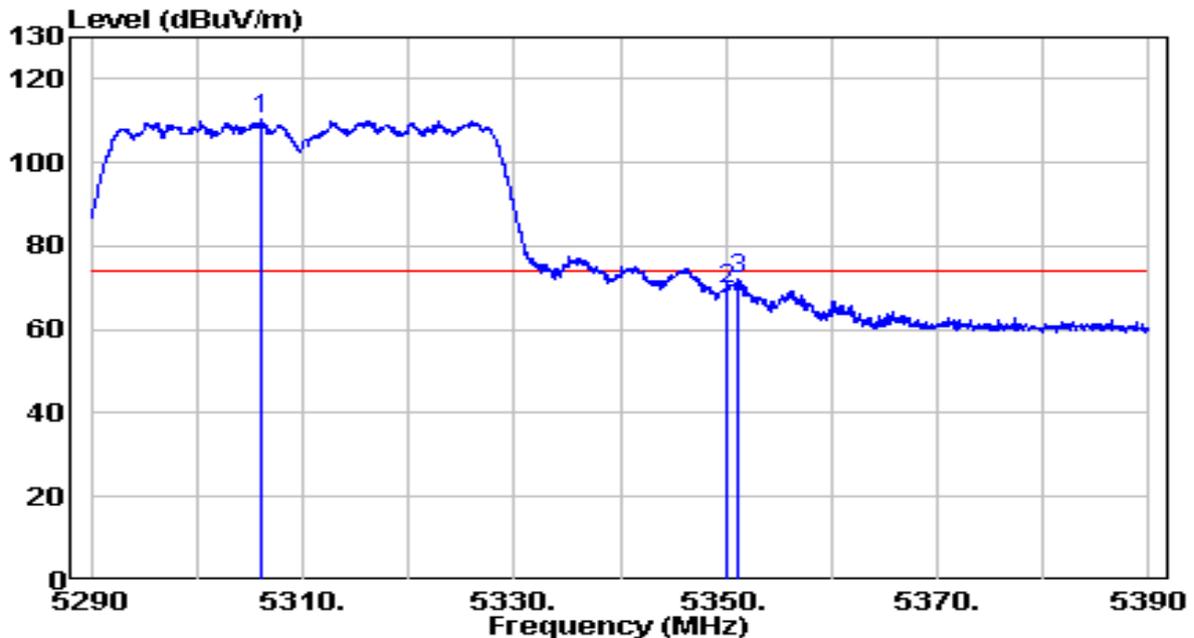


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5306.200	90.08	20.07	110.15	N/A	N/A	Peak
2	5350.000	49.39	20.11	69.50	-4.50	74.00	Peak
3	5351.150	52.09	20.12	72.21	-1.79	74.00	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	120V/60Hz

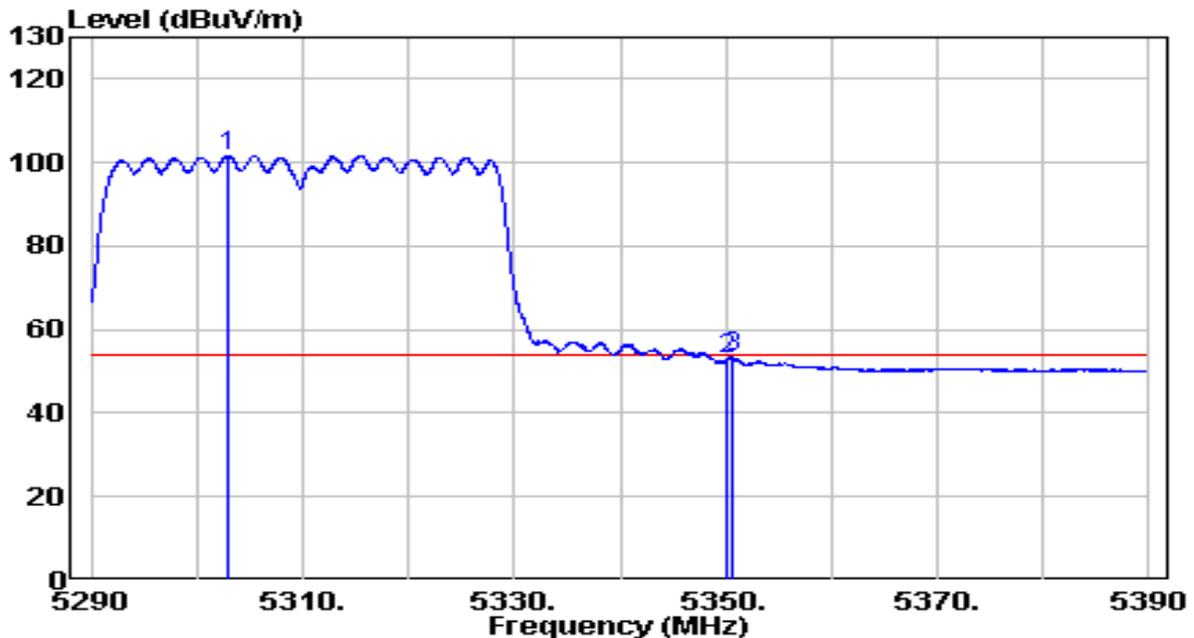


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5302.850	81.52	20.06	101.59	N/A	N/A	Average
2	5350.000	32.74	20.11	52.85	-1.15	54.00	Average
3	5350.650	33.43	20.11	53.54	-0.46	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	120V/60Hz

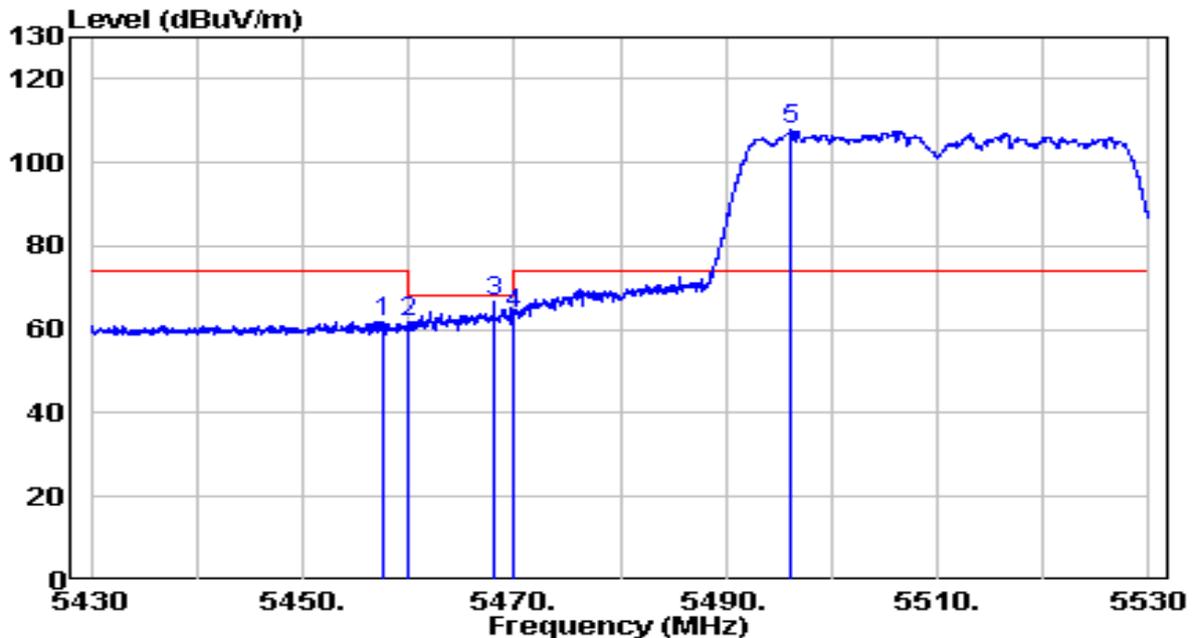


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.500	41.72	20.23	61.94	-12.06	74.00	Peak
2	5460.000	41.53	20.23	61.75	-6.45	68.20	Peak
3	5468.100	46.70	20.24	66.94	-1.26	68.20	Peak
4	5470.000	43.66	20.24	63.90	-4.30	68.20	Peak
5 *	5496.200	87.50	20.27	107.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	120V/60Hz

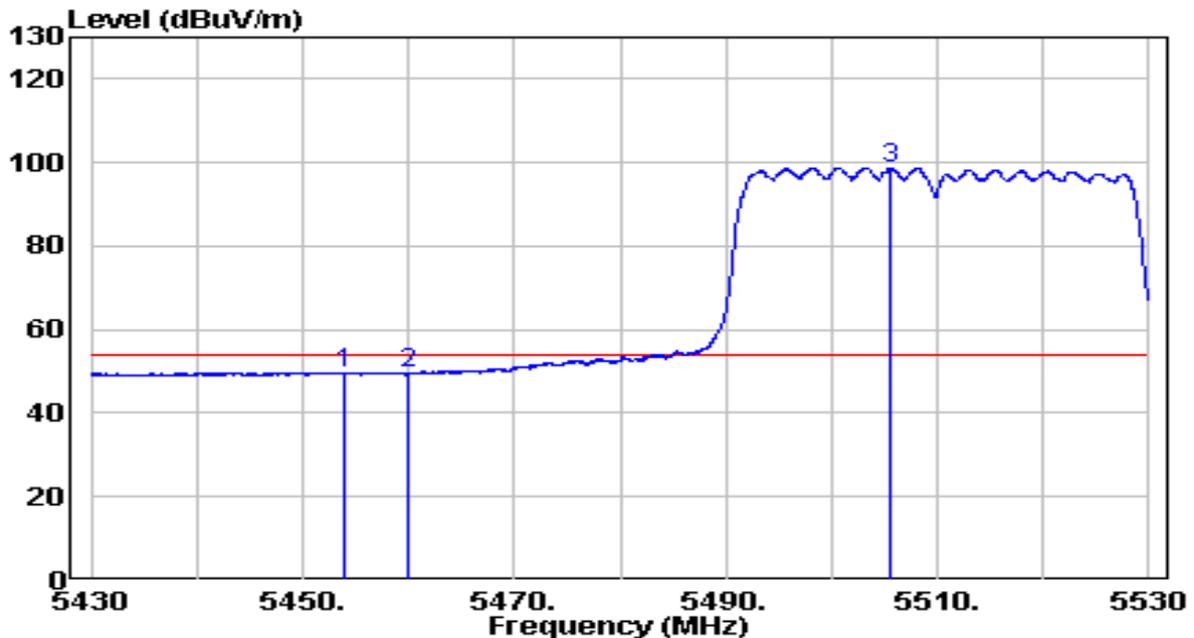


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.850	29.53	20.22	49.75	-4.25	54.00	Average
2	5460.000	29.33	20.23	49.56	-4.44	54.00	Average
3	* 5505.600	78.52	20.29	98.81	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	120V/60Hz

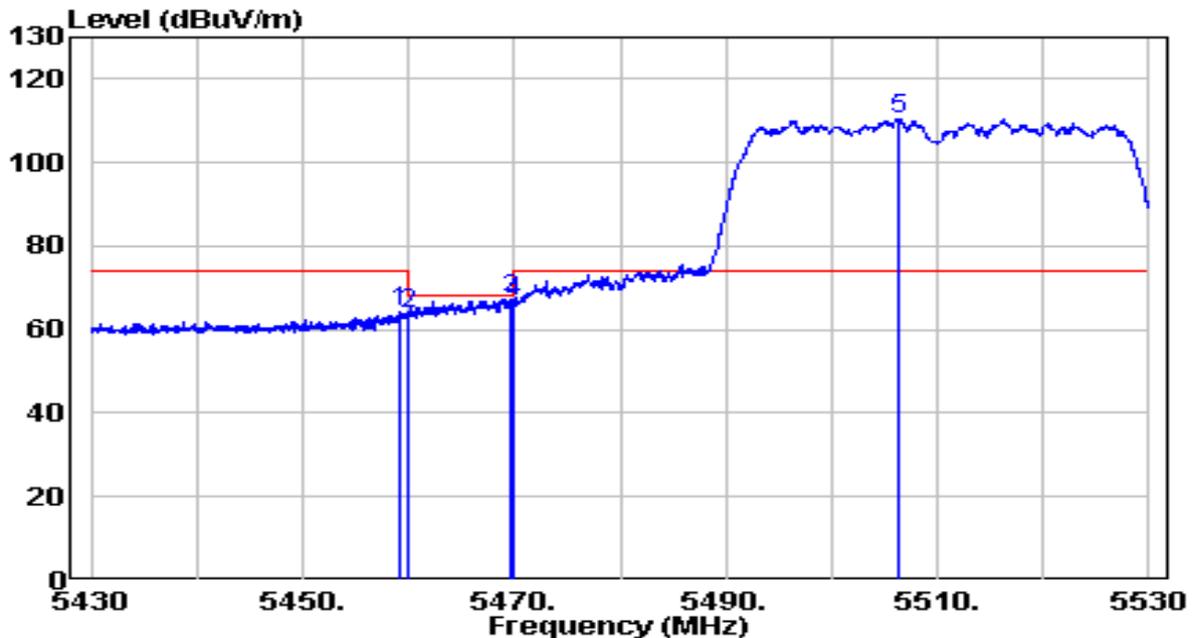


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5459.100	44.27	20.23	64.49	-9.51	74.00	Peak
2	5460.000	43.56	20.23	63.79	-4.41	68.20	Peak
3	5469.600	47.15	20.24	67.39	-0.81	68.20	Peak
4	5470.000	46.37	20.24	66.61	-1.59	68.20	Peak
5 *	5506.400	90.09	20.29	110.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	120V/60Hz

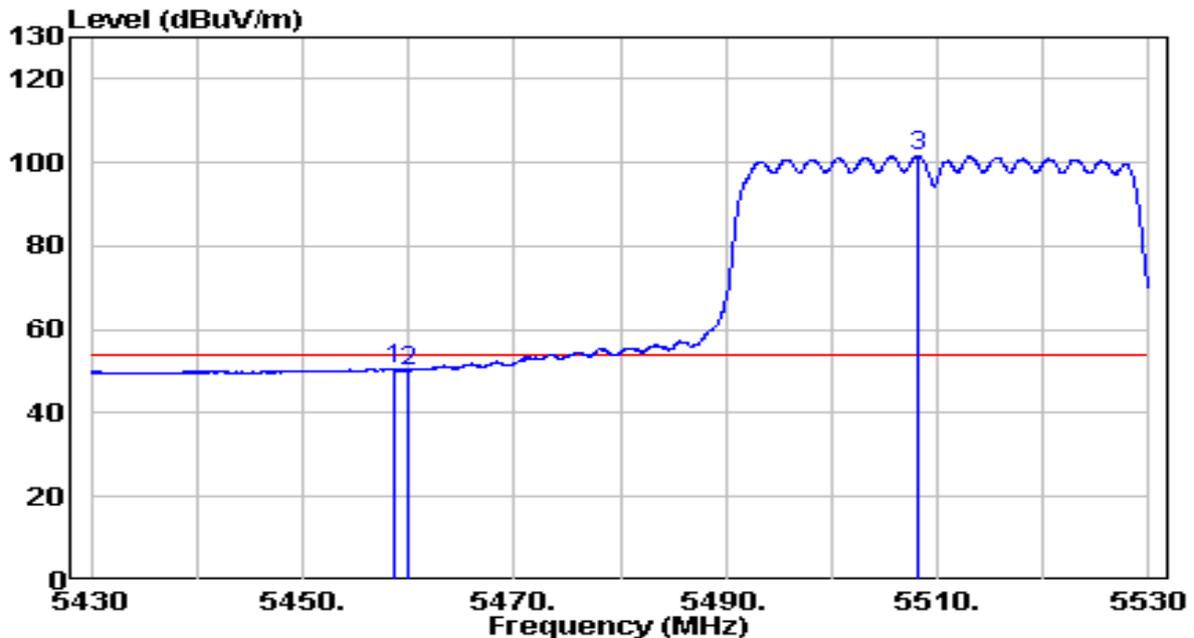


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.550	30.48	20.23	50.71	-3.29	54.00	Average
2	5460.000	30.01	20.23	50.23	-3.77	54.00	Average
3	* 5508.150	81.16	20.30	101.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz	Test Voltage	120V/60Hz

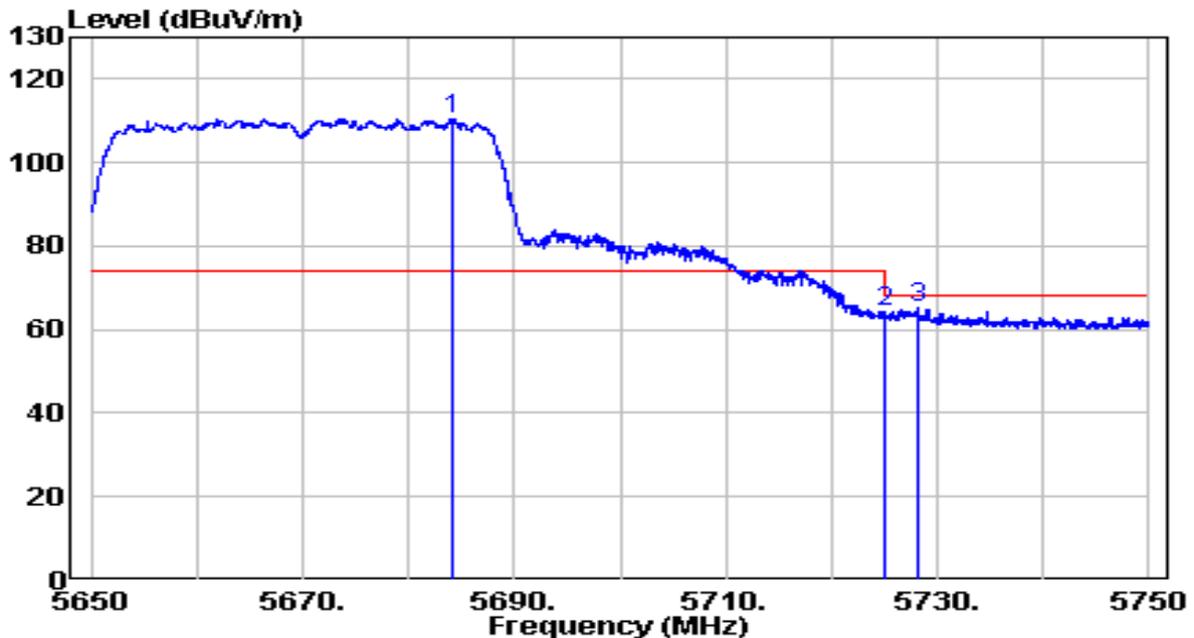


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5684.050	89.73	20.87	110.60	N/A	N/A	Peak
2	5725.000	43.07	21.00	64.07	-4.13	68.20	Peak
3	5728.100	44.00	21.01	65.01	-3.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz	Test Voltage	120V/60Hz

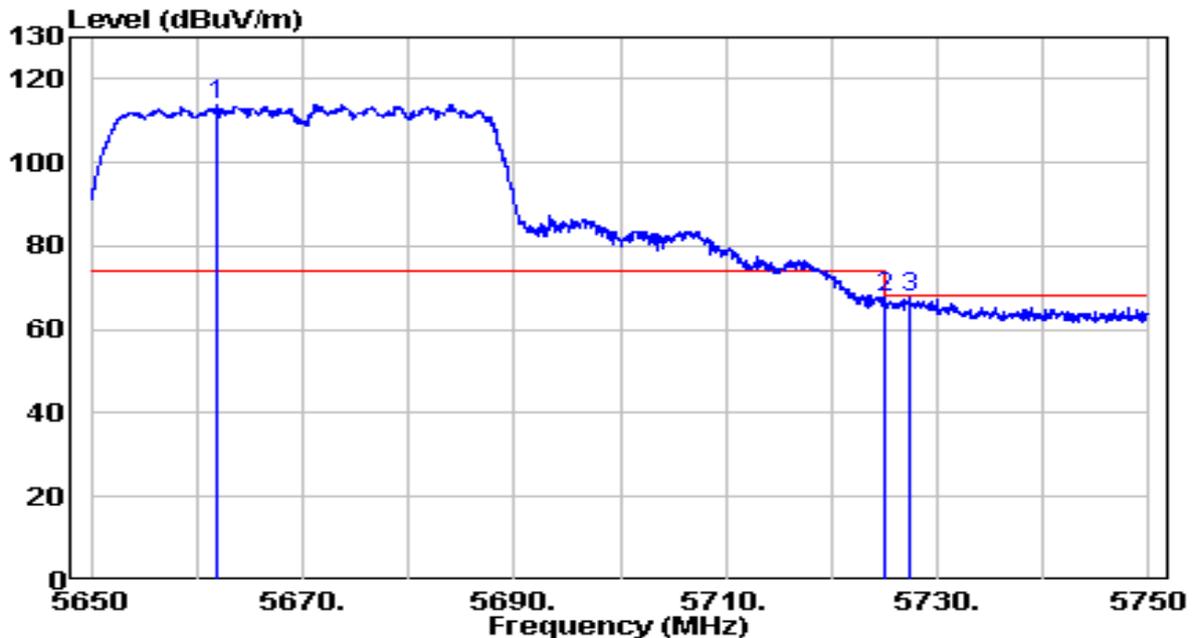


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5661.800	93.03	20.79	113.82	N/A	N/A	Peak
2	5725.000	46.47	21.00	67.47	-0.73	68.20	Peak
3	5727.500	46.68	21.01	67.69	-0.51	68.20	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz	Test Voltage	120V/60Hz

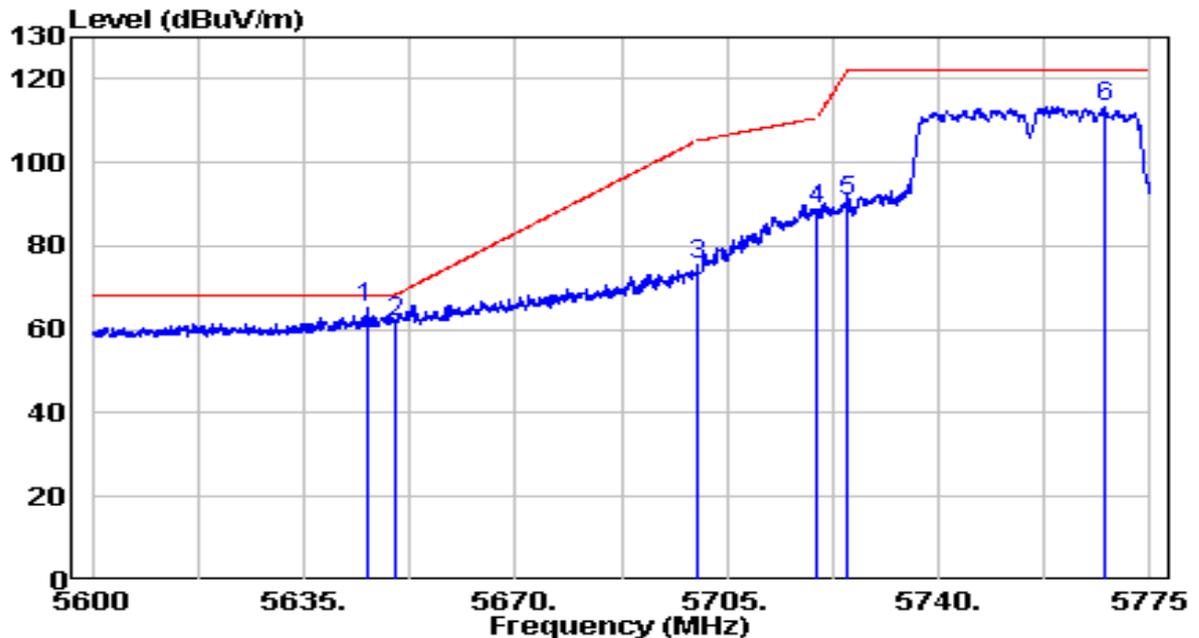


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5645.325	44.75	20.74	65.49	-2.71	68.20	Peak
2	5650.000	41.01	20.76	61.77	-6.43	68.20	Peak
3	5700.000	54.81	20.92	75.73	-29.47	105.20	Peak
4	5720.000	67.89	20.98	88.87	-21.93	110.80	Peak
5	5725.000	69.90	21.00	90.90	-31.30	122.20	Peak
6	5767.475	92.21	21.14	113.35	N/A	N/A	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz	Test Voltage	120V/60Hz

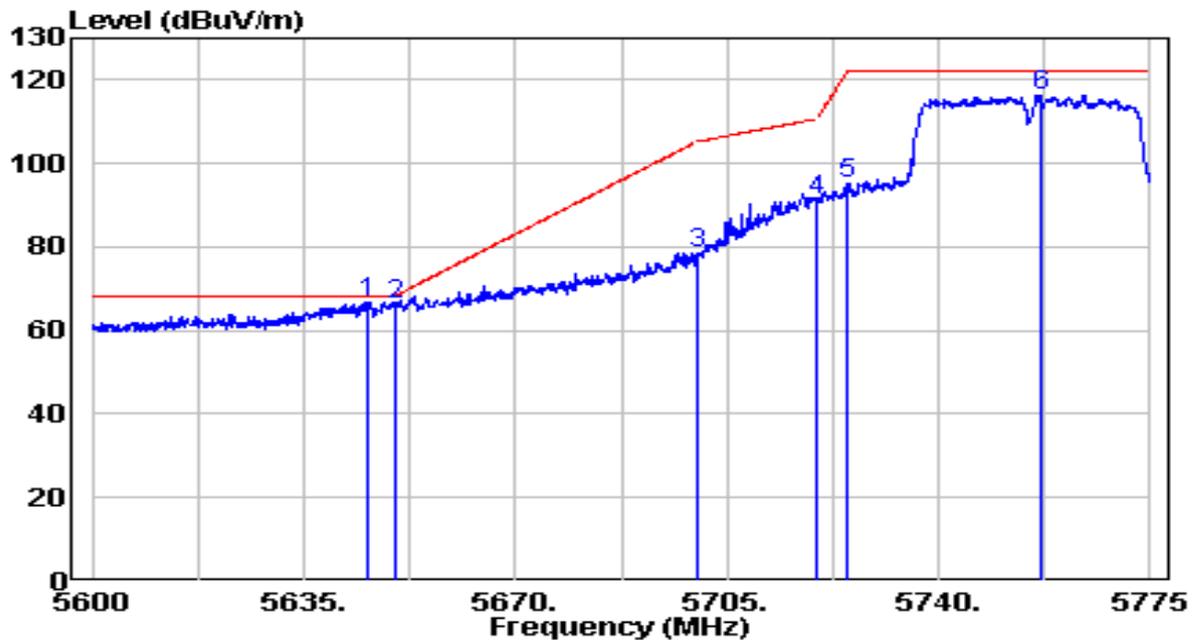


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5645.675	46.21	20.74	66.95	-1.25	68.20	Peak
2	5650.000	45.55	20.76	66.31	-1.89	68.20	Peak
3	5700.000	57.44	20.92	78.36	-26.84	105.20	Peak
4	5720.000	70.30	20.98	91.28	-19.52	110.80	Peak
5	5725.000	74.14	21.00	95.14	-27.06	122.20	Peak
6	5756.800	95.30	21.10	116.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz	Test Voltage	120V/60Hz

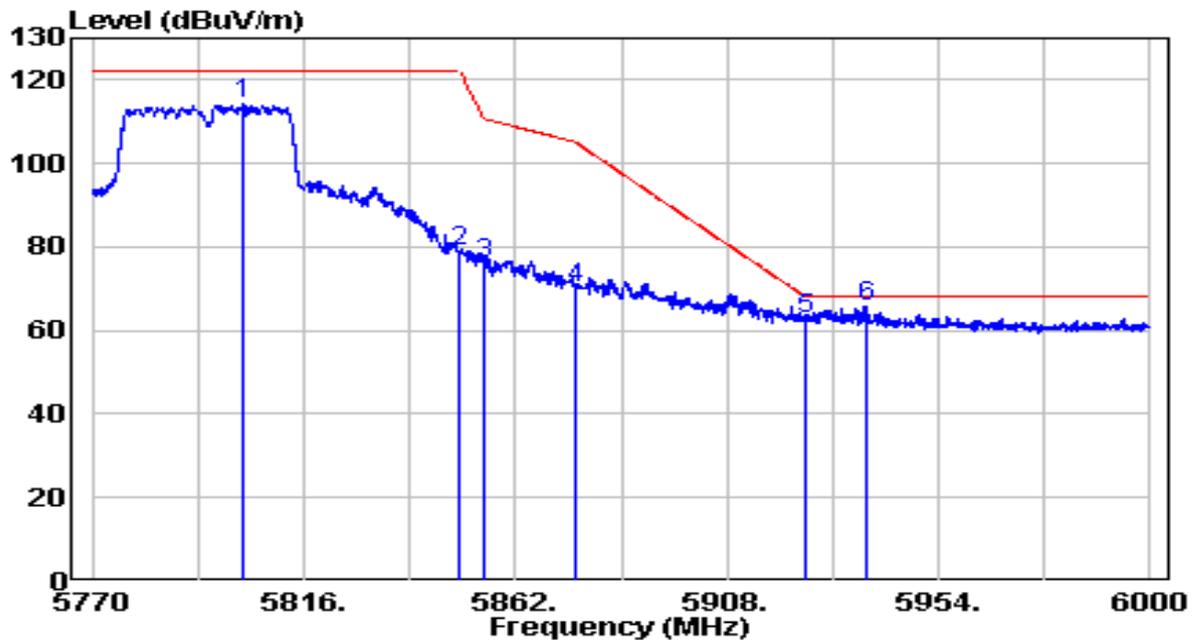


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5802.660	92.87	21.25	114.12	N/A	N/A	Peak
2	5850.000	57.42	21.40	78.82	-43.38	122.20	Peak
3	5855.000	54.69	21.42	76.11	-34.69	110.80	Peak
4	5875.000	48.64	21.49	70.12	-35.08	105.20	Peak
5	5925.000	40.98	21.65	62.63	-5.57	68.20	Peak
6	* 5938.130	43.98	21.69	65.67	-2.53	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz	Test Voltage	120V/60Hz

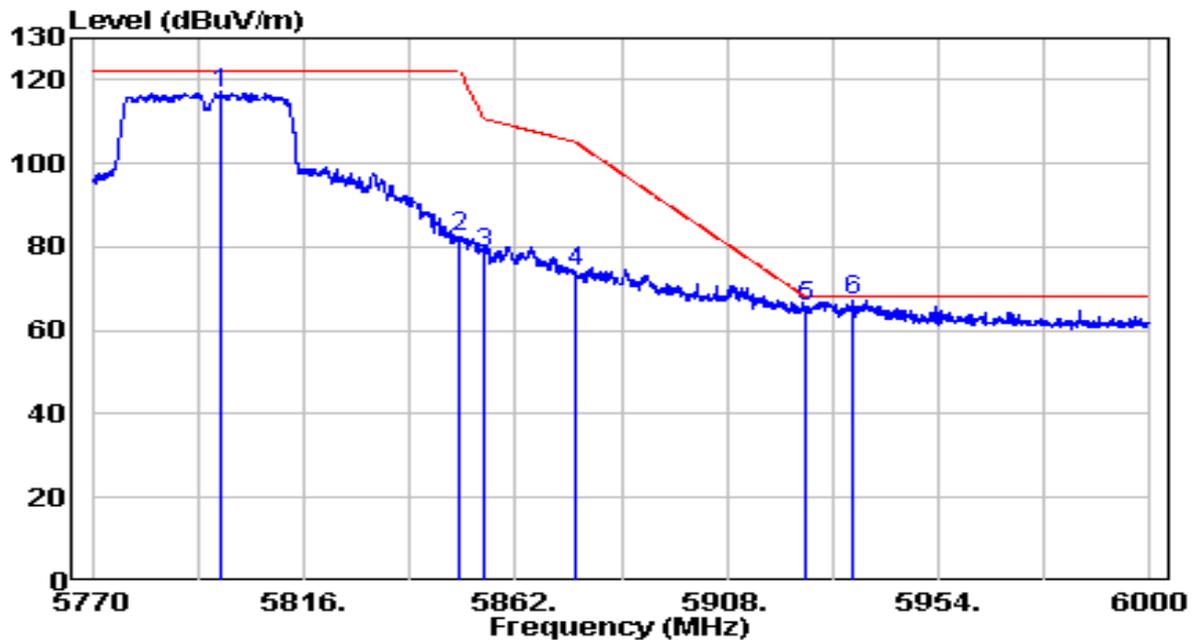


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5798.060	95.76	21.24	117.00	N/A	N/A	Peak
2	5850.000	60.77	21.40	82.17	-40.03	122.20	Peak
3	5855.000	56.93	21.42	78.35	-32.45	110.80	Peak
4	5875.000	52.70	21.49	74.18	-31.02	105.20	Peak
5	5925.000	44.07	21.65	65.72	-2.48	68.20	Peak
6	* 5935.140	45.39	21.68	67.07	-1.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	120V/60Hz

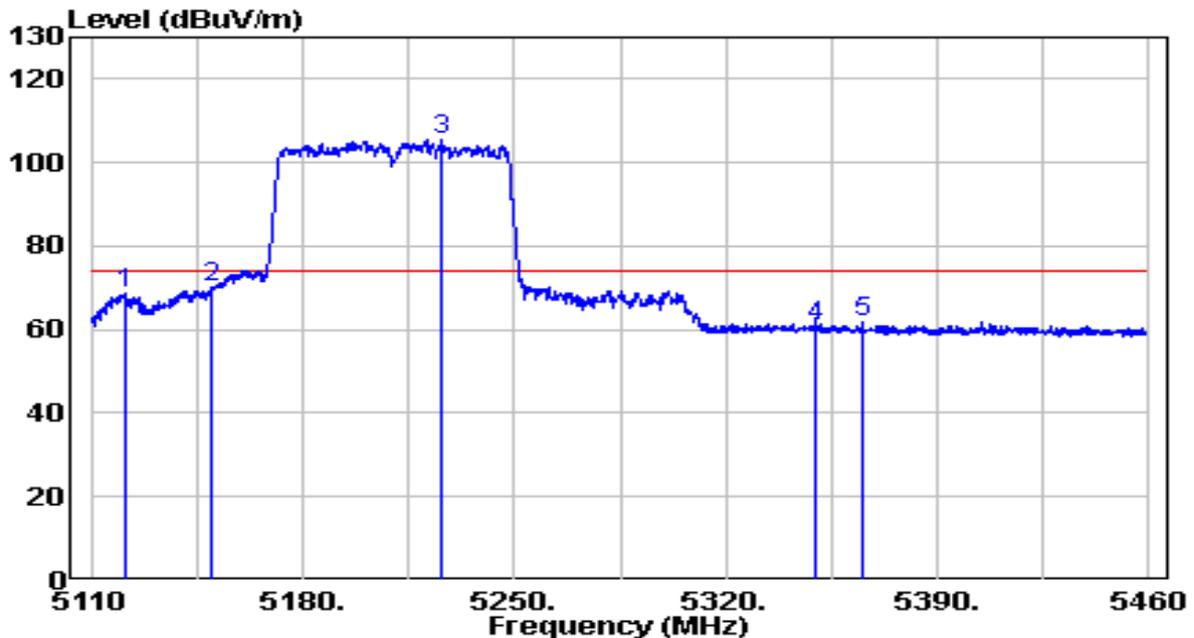


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5121.200	49.01	19.88	68.89	-5.11	74.00	Peak
2	5150.000	50.02	19.91	69.93	-4.07	74.00	Peak
3	* 5225.675	85.32	19.98	105.30	N/A	N/A	Peak
4	5350.000	40.64	20.11	60.75	-13.25	74.00	Peak
5	5365.500	41.57	20.13	61.70	-12.30	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	120V/60Hz

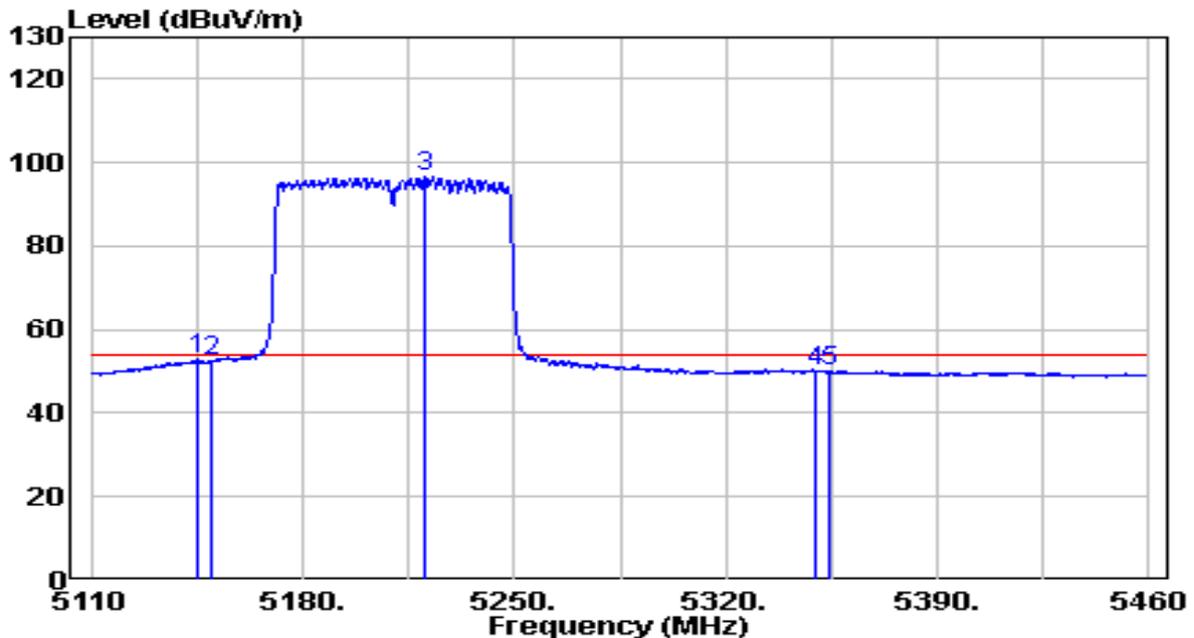


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5145.175	32.92	19.90	52.83	-1.17	54.00	Average
2	5150.000	32.76	19.91	52.66	-1.34	54.00	Average
3	* 5220.600	76.46	19.98	96.44	N/A	N/A	Average
4	5350.000	29.79	20.11	49.91	-4.09	54.00	Average
5	5354.125	30.01	20.12	50.13	-3.87	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	120V/60Hz

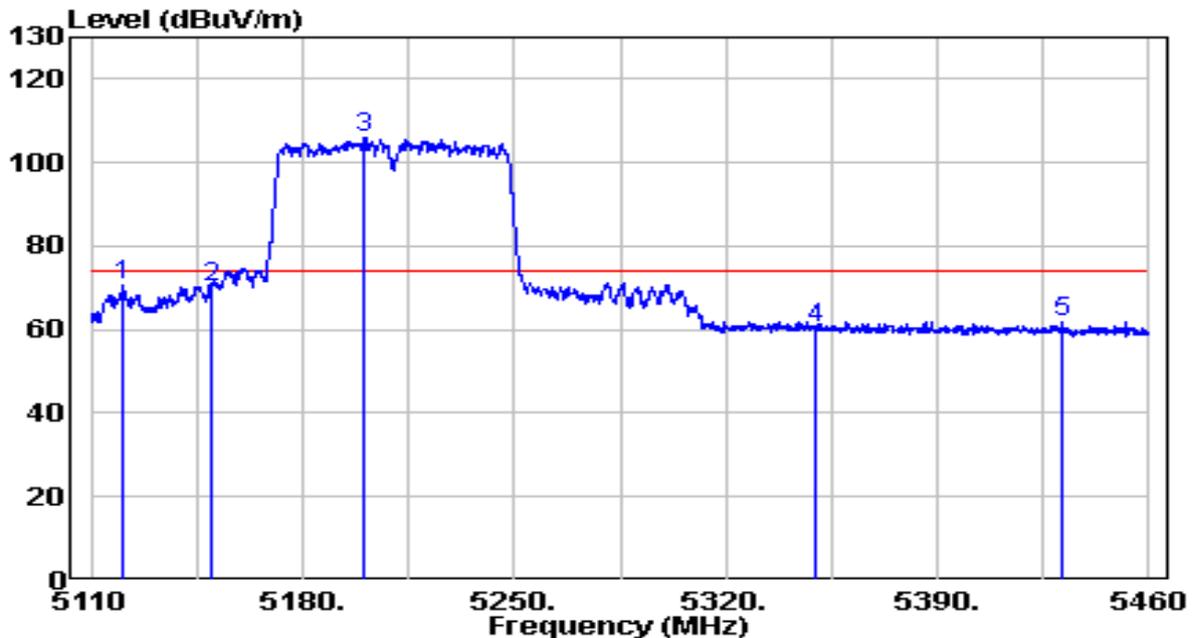


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5120.500	50.55	19.88	70.43	-3.57	74.00	Peak
2	5150.000	50.23	19.91	70.14	-3.86	74.00	Peak
3 *	5200.475	86.05	19.96	106.01	N/A	N/A	Peak
4	5350.000	40.07	20.11	60.18	-13.82	74.00	Peak
5	5431.650	41.61	20.20	61.81	-12.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	120V/60Hz

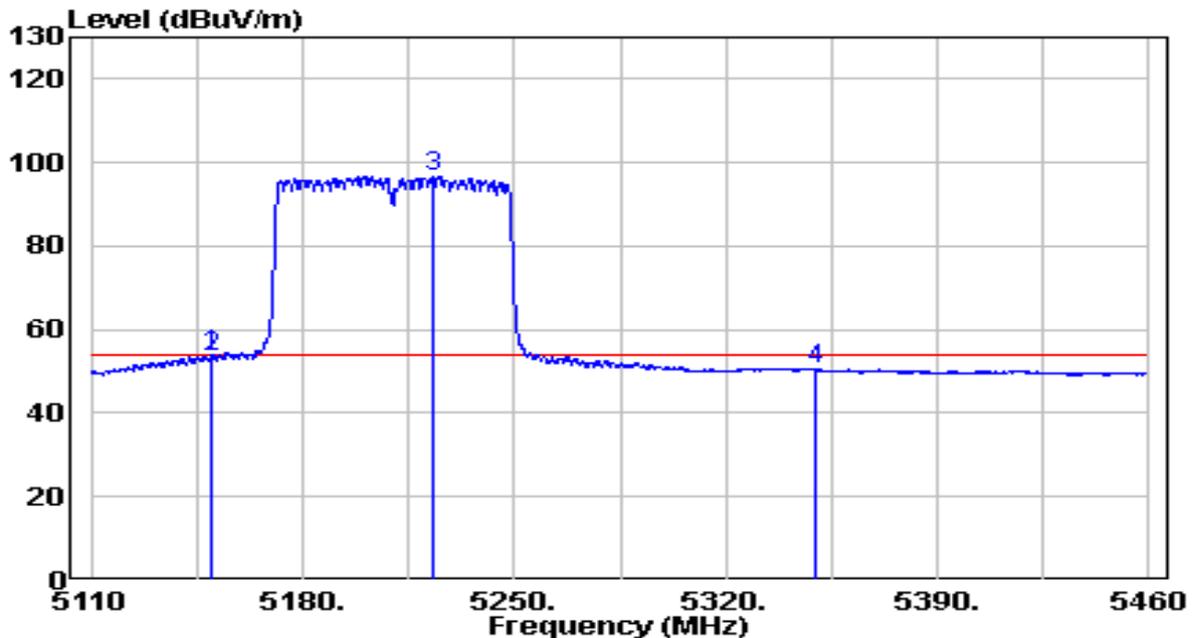


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.725	33.91	19.91	53.82	-0.18	54.00	Average
2	5150.075	33.80	19.91	53.71	-0.29	54.00	Average
3	* 5222.875	76.64	19.98	96.62	N/A	N/A	Average
4	5350.000	30.34	20.11	50.45	-3.55	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	120V/60Hz

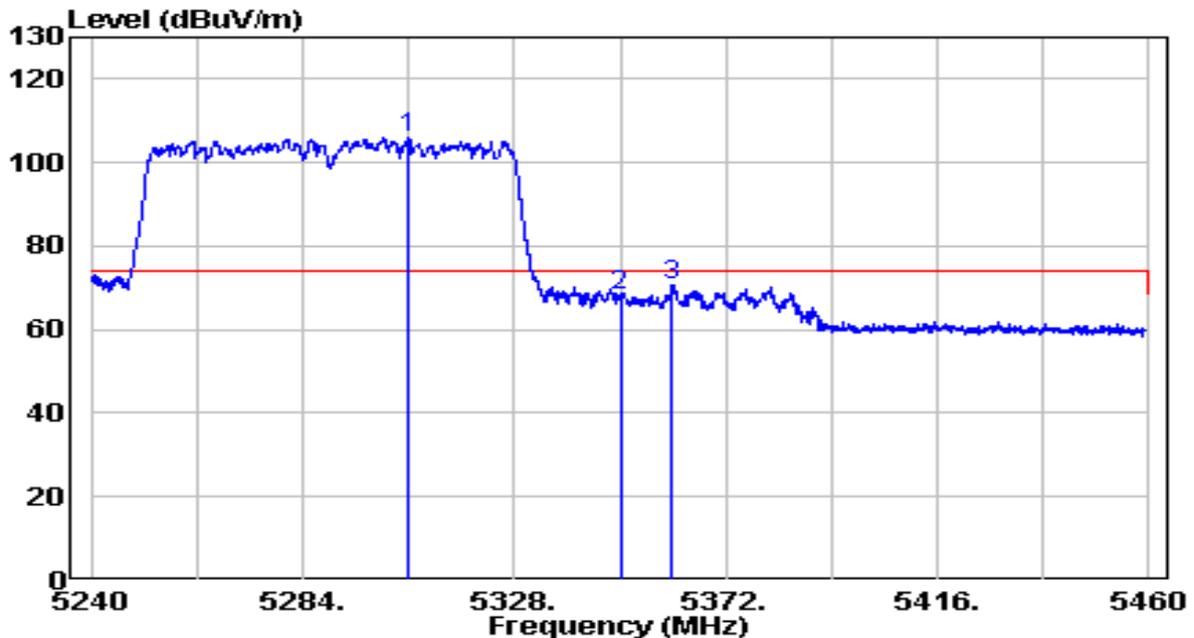


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5306.000	85.91	20.07	105.98	N/A	N/A	Peak
2	5350.000	47.96	20.11	68.07	-5.93	74.00	Peak
3	5360.890	50.50	20.13	70.62	-3.38	74.00	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	120V/60Hz

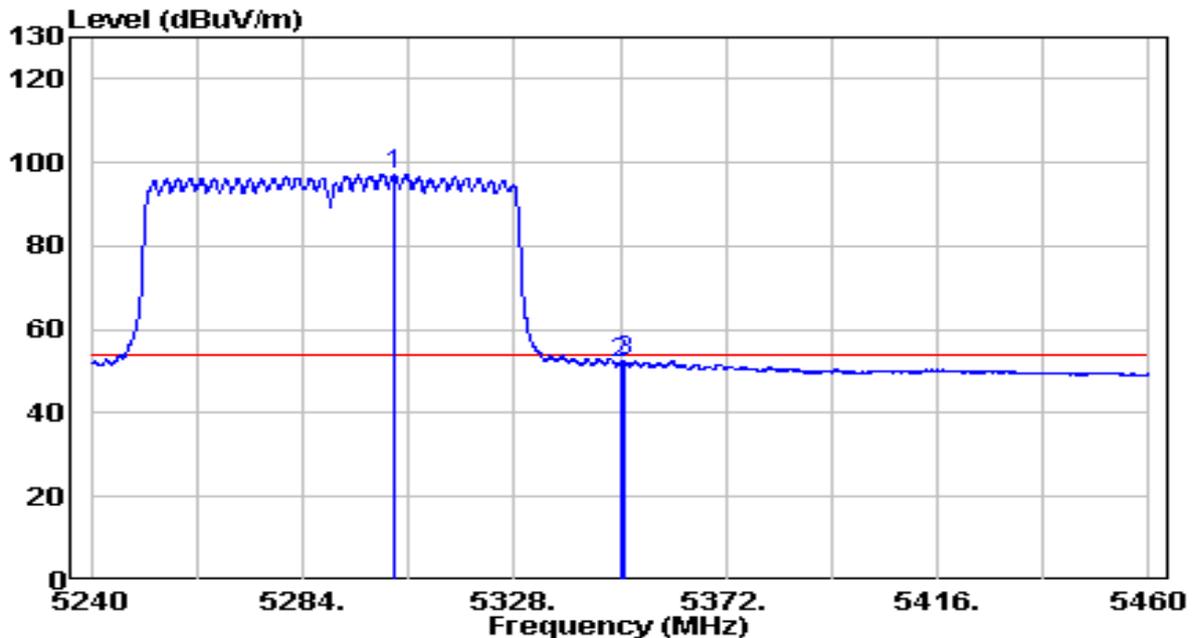


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5303.140	77.18	20.07	97.24	N/A	N/A	Average
2	5350.000	32.06	20.11	52.18	-1.82	54.00	Average
3	5350.660	32.47	20.11	52.59	-1.41	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	120V/60Hz

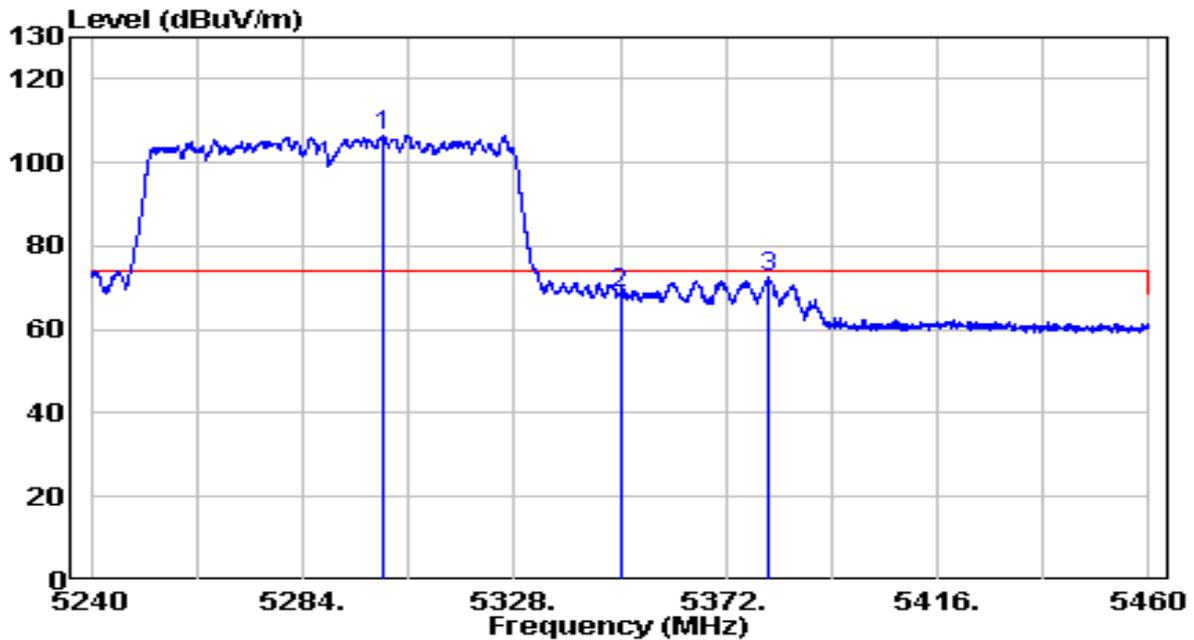


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5300.940	86.51	20.06	106.58	N/A	N/A	Peak
2	5350.000	48.52	20.11	68.64	-5.36	74.00	Peak
3	5380.800	52.66	20.15	72.80	-1.20	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	120V/60Hz

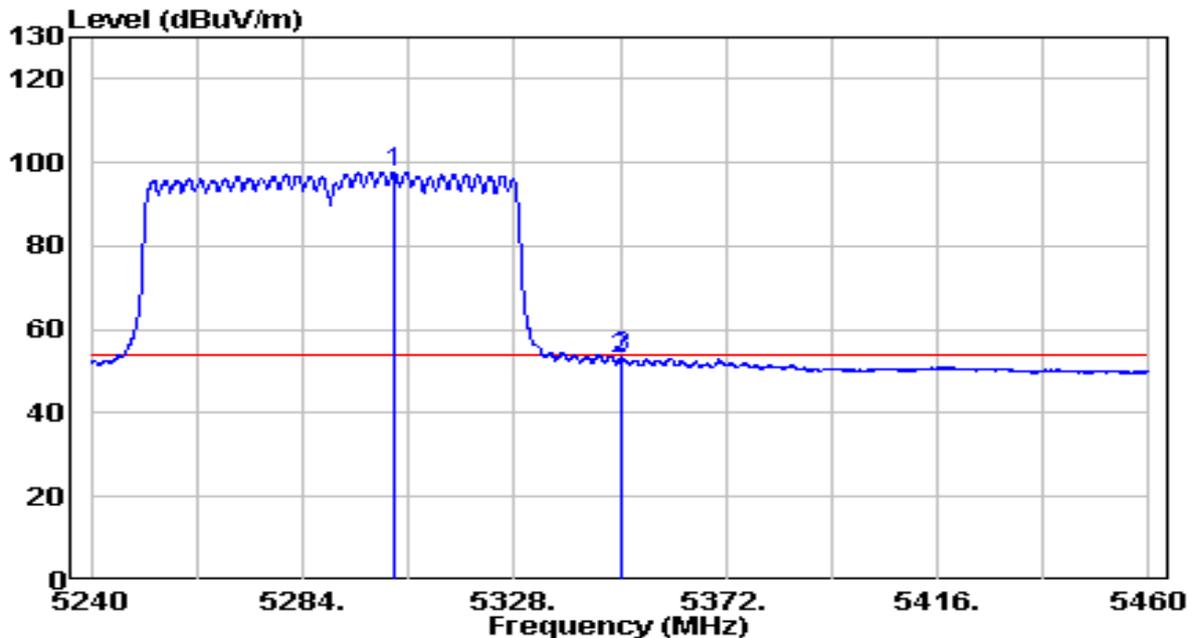


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5302.920	77.71	20.07	97.78	N/A	N/A	Average
2	5350.000	32.88	20.11	52.99	-1.01	54.00	Average
3	5350.220	33.20	20.11	53.31	-0.69	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	120V/60Hz

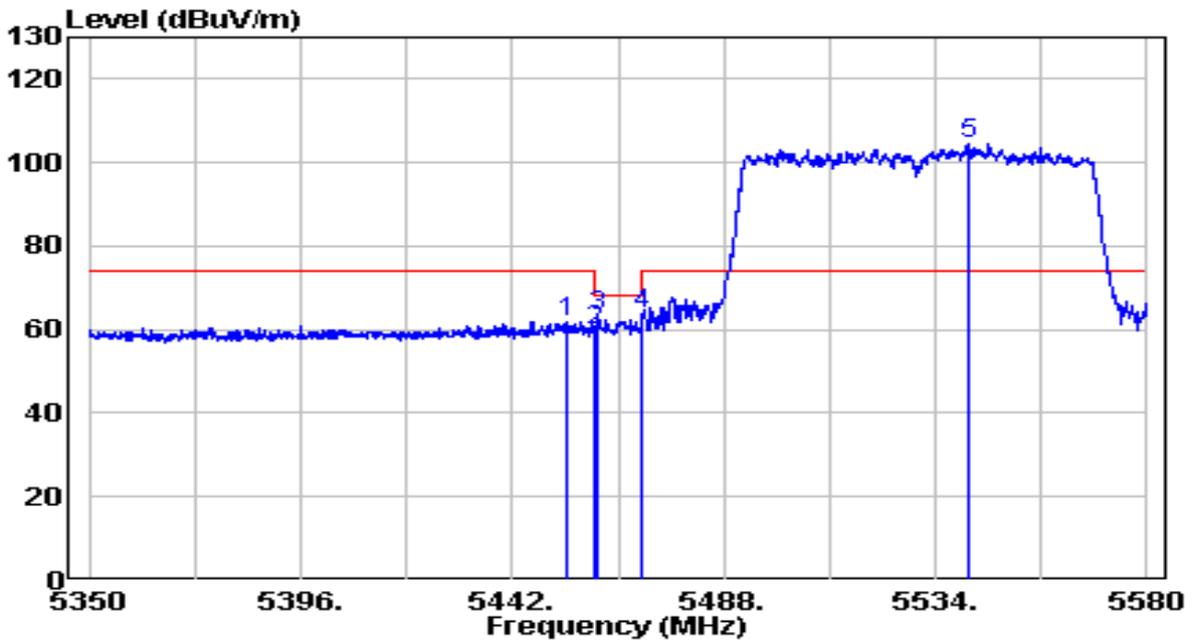


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.845	41.52	20.22	61.74	-12.26	74.00	Peak
2	5460.000	39.39	20.23	59.61	-8.59	68.20	Peak
3	5460.630	43.03	20.23	63.26	-4.94	68.20	Peak
4	5470.000	43.32	20.24	63.56	-4.64	68.20	Peak
5 *	5541.130	84.06	20.40	104.46	N/A	N/A	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	120V/60Hz

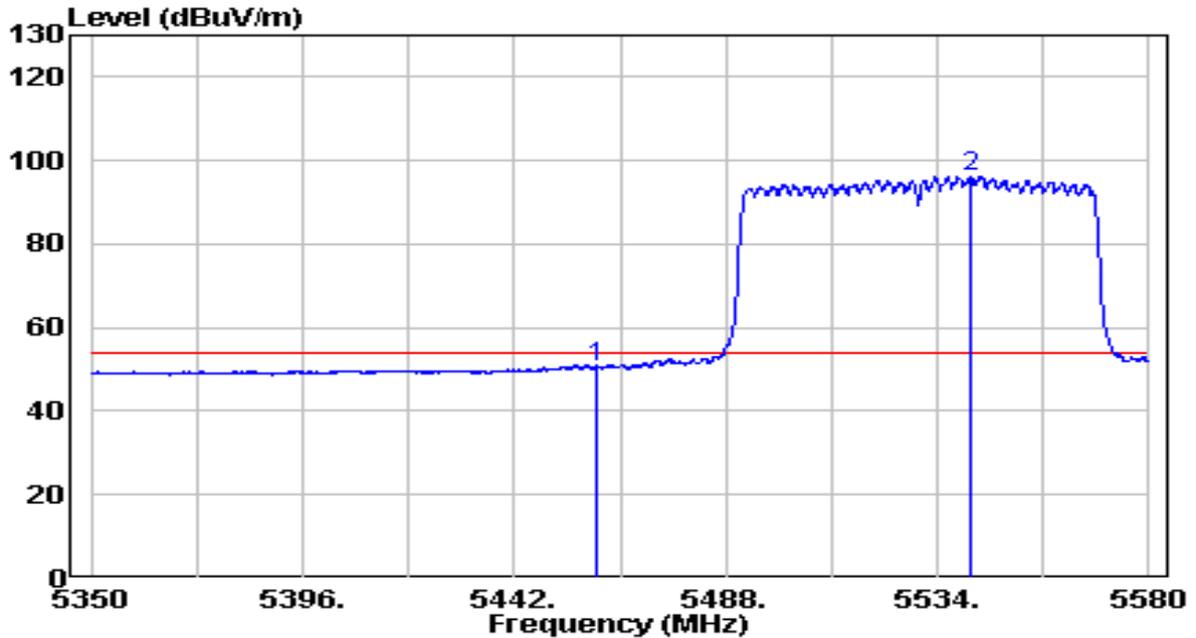


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.22	20.23	50.45	-3.55	54.00	Average
2	* 5541.130	75.67	20.40	96.07	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	120V/60Hz

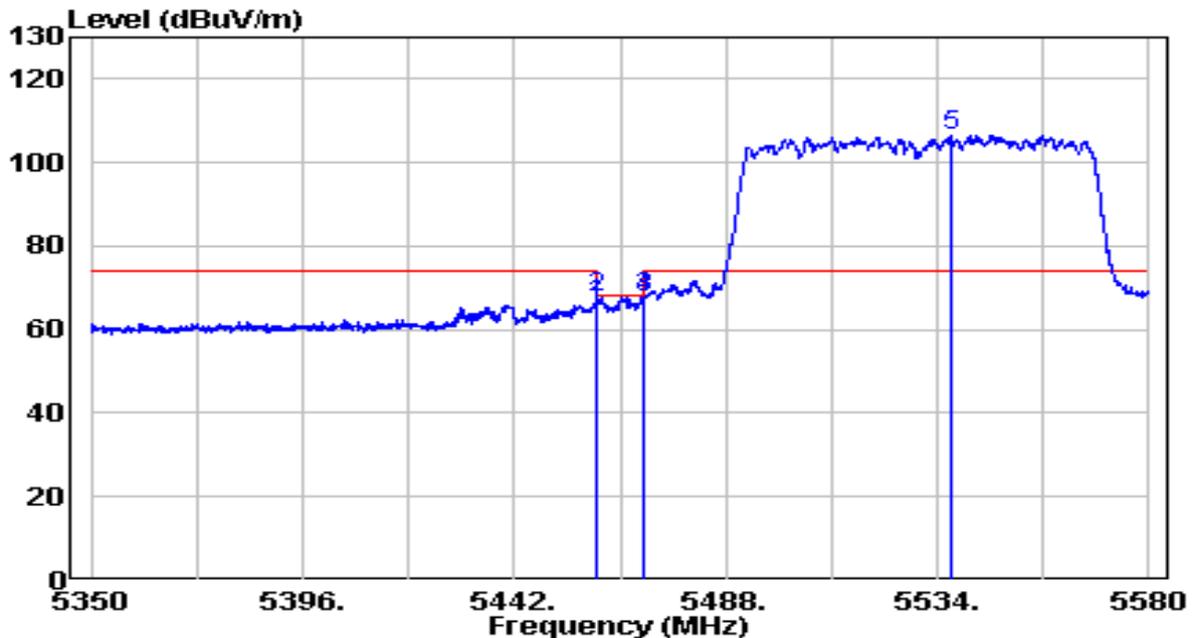


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5459.710	46.20	20.23	66.42	-7.58	74.00	Peak
2	5460.000	47.36	20.23	67.59	-0.61	68.20	Peak
3	0.00 5469.945	47.65	20.24	67.89	-0.31	68.20	Peak
4	5470.000	47.65	20.24	67.89	-0.31	68.20	Peak
5	* 5536.760	86.04	20.39	106.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	120V/60Hz

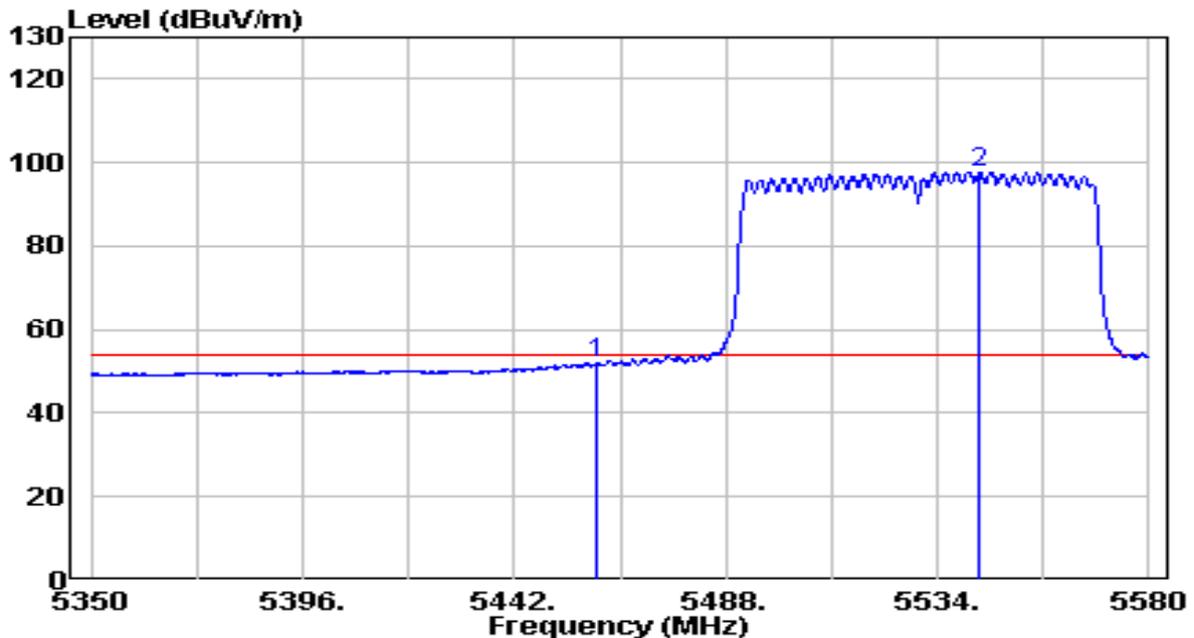


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	31.85	20.23	52.08	-1.92	54.00	Average
2	* 5543.200	77.42	20.41	97.83	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz	Test Voltage	120V/60Hz

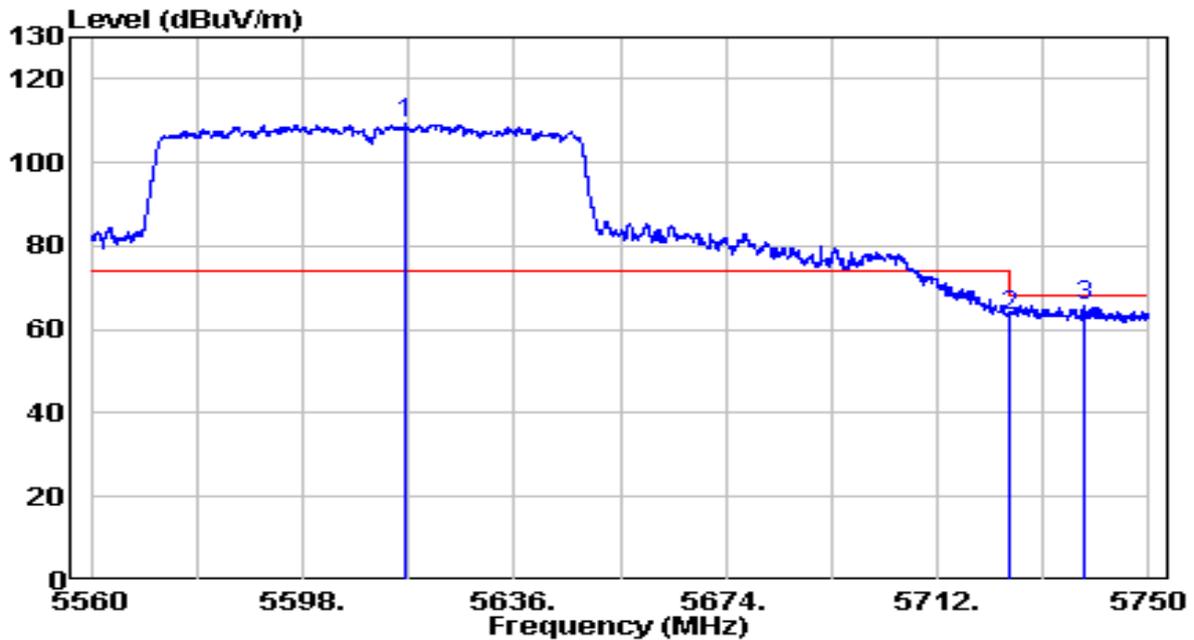


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5616.240	88.84	20.65	109.48	N/A	N/A	Peak
2	5725.000	42.12	21.00	63.12	-5.08	68.20	Peak
3	5738.600	44.83	21.04	65.87	-2.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	19.4°C/18.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz	Test Voltage	120V/60Hz

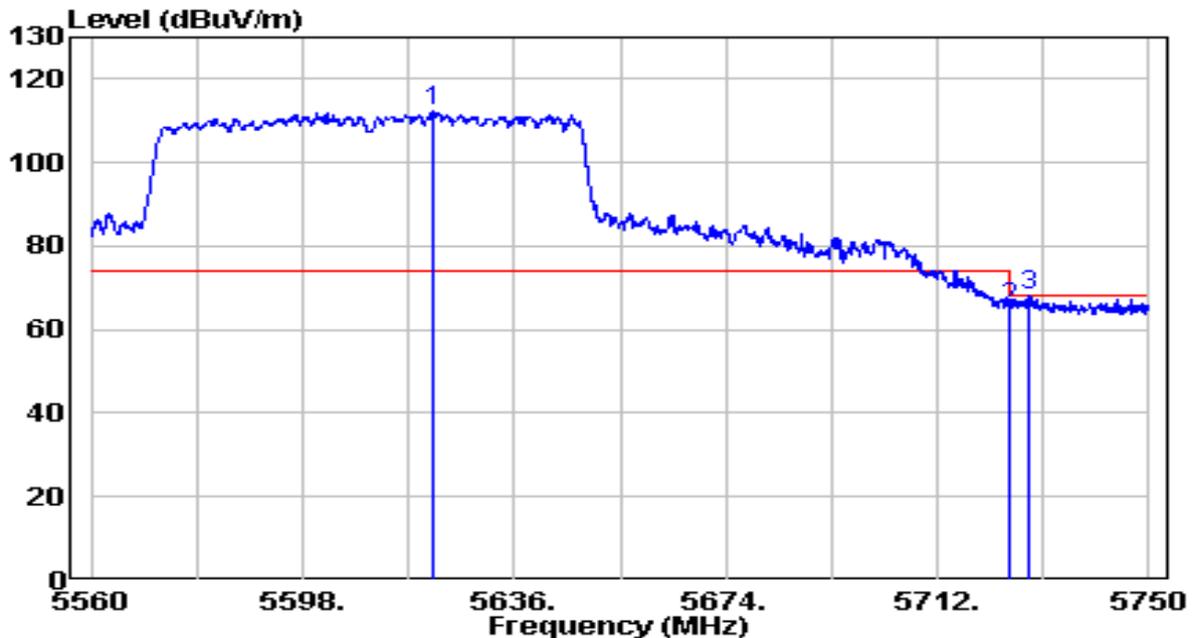


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5621.465	91.64	20.66	112.30	N/A	N/A	Peak
2	5725.000	44.19	21.00	65.19	-3.01	68.20	Peak
3	5728.340	47.09	21.01	68.10	-0.10	68.20	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

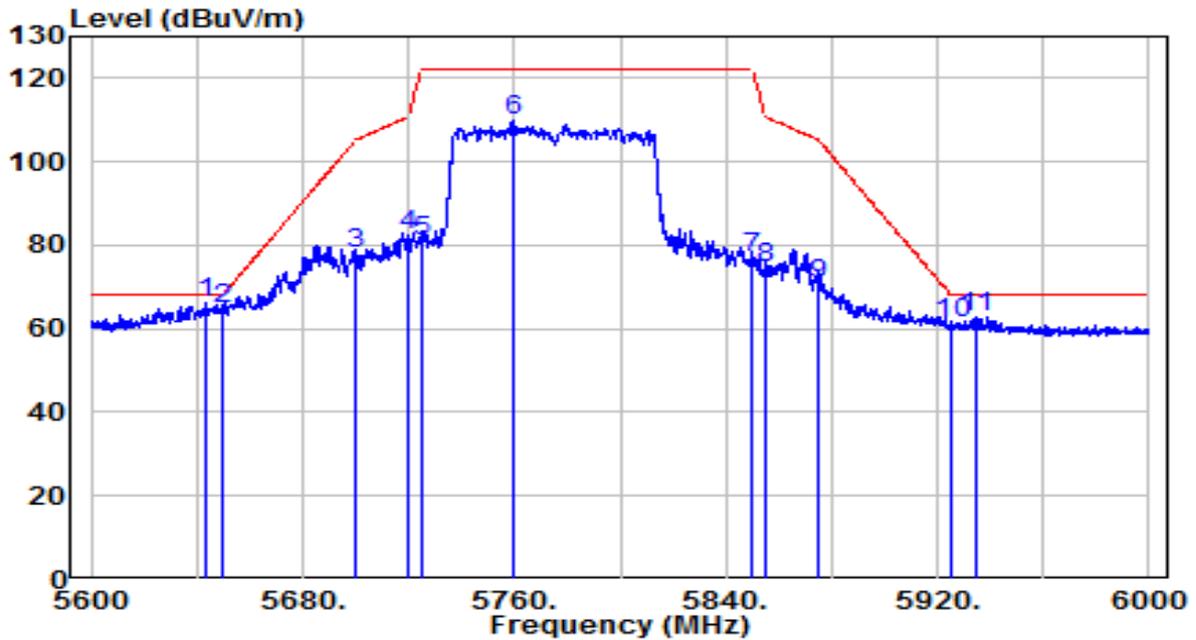


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5643.000	45.25	20.73	65.98	-2.22	68.20	Peak
2	5650.000	43.94	20.76	64.70	-3.50	68.20	Peak
3	5700.000	56.94	20.92	77.86	-27.34	105.20	Peak
4	5720.000	61.22	20.98	82.20	-28.60	110.80	Peak
5	5725.000	60.11	21.00	81.11	-41.09	122.20	Peak
6	5759.400	88.63	21.11	109.74	N/A	N/A	Peak
7	5850.000	55.65	21.40	77.05	-45.15	122.20	Peak
8	5855.000	53.24	21.42	74.66	-36.14	110.80	Peak
9	5875.000	49.05	21.49	70.53	-34.67	105.20	Peak
10	5925.000	39.88	21.65	61.53	-6.67	68.20	Peak
11	5934.600	41.12	21.68	62.80	-5.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)- Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

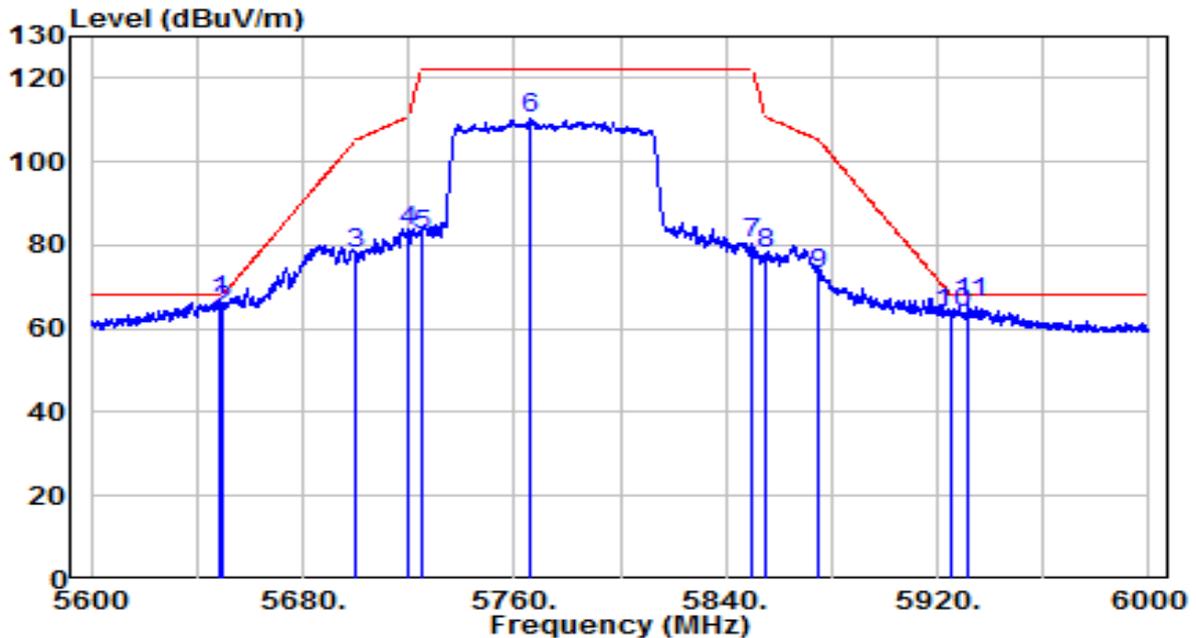


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5649.000	45.89	20.75	66.64	-1.56	68.20	Peak
2	5650.000	43.46	20.76	64.22	-3.98	68.20	Peak
3	5700.000	57.16	20.92	78.08	-27.12	105.20	Peak
4	5720.000	62.39	20.98	83.38	-27.42	110.80	Peak
5	5725.000	61.64	21.00	82.64	-39.56	122.20	Peak
6	5766.400	89.03	21.13	110.16	N/A	N/A	Peak
7	5850.000	58.88	21.40	80.29	-41.91	122.20	Peak
8	5855.000	56.34	21.42	77.76	-33.04	110.80	Peak
9	5875.000	51.53	21.49	73.02	-32.18	105.20	Peak
10	5925.000	42.00	21.65	63.64	-4.56	68.20	Peak
11	5932.000	44.43	21.67	66.10	-2.10	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)- Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

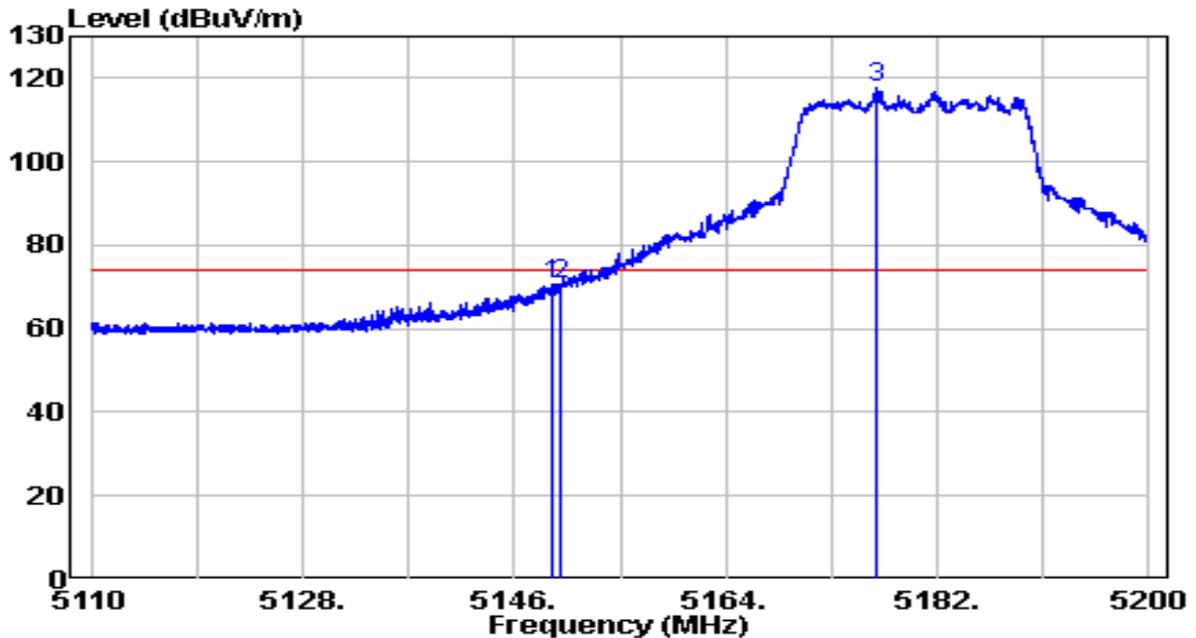


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.195	50.89	19.91	70.80	-3.20	74.00	Peak
2	5150.000	50.75	19.91	70.65	-3.35	74.00	Peak
3	* 5176.870	97.97	19.93	117.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

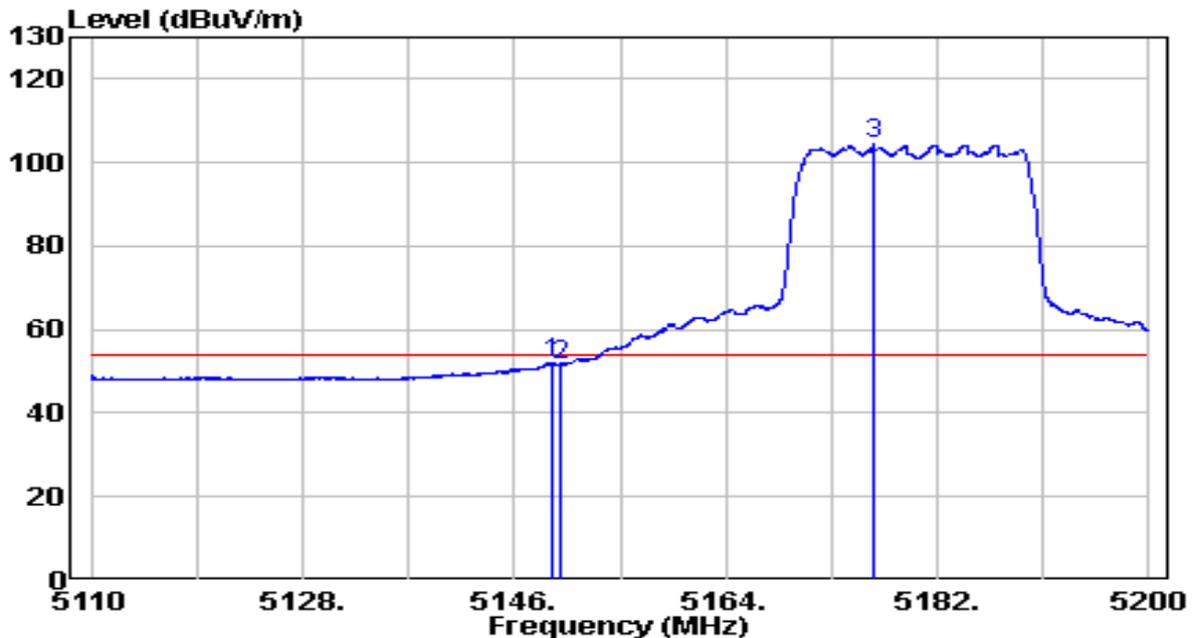


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.240	32.25	19.91	52.16	-1.84	54.00	Average
2	5150.000	31.81	19.91	51.71	-2.29	54.00	Average
3	* 5176.645	84.32	19.93	104.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

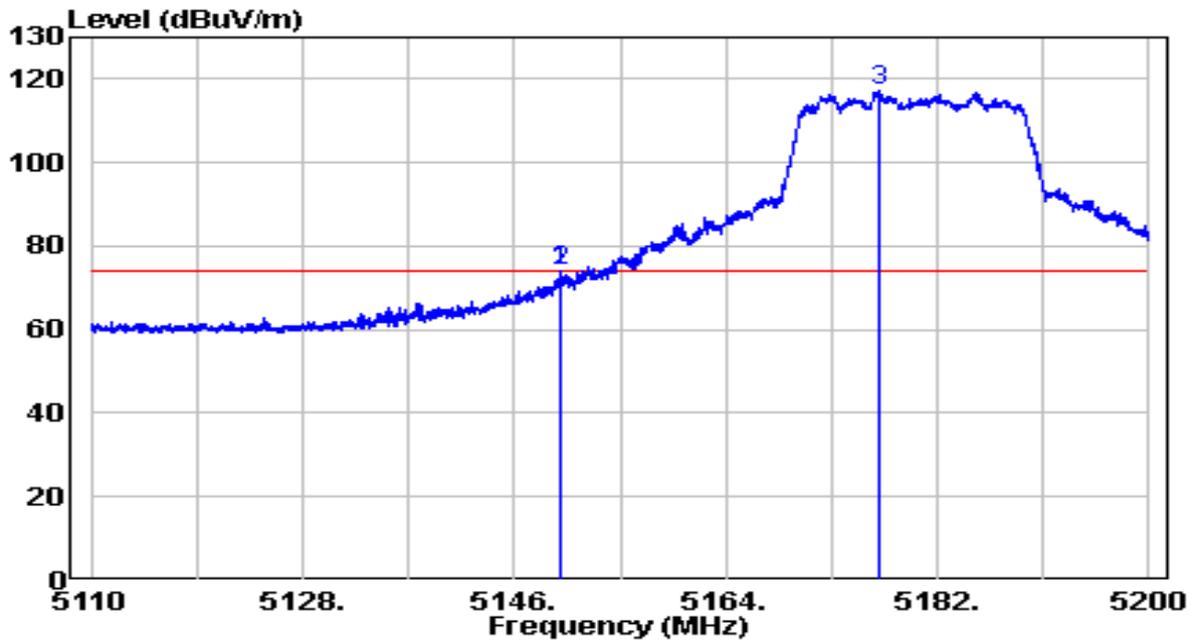


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	53.93	19.91	73.84	-0.16	74.00	Peak
2	5150.005	53.93	19.91	73.84	-0.16	74.00	Peak
3	* 5177.140	97.18	19.93	117.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

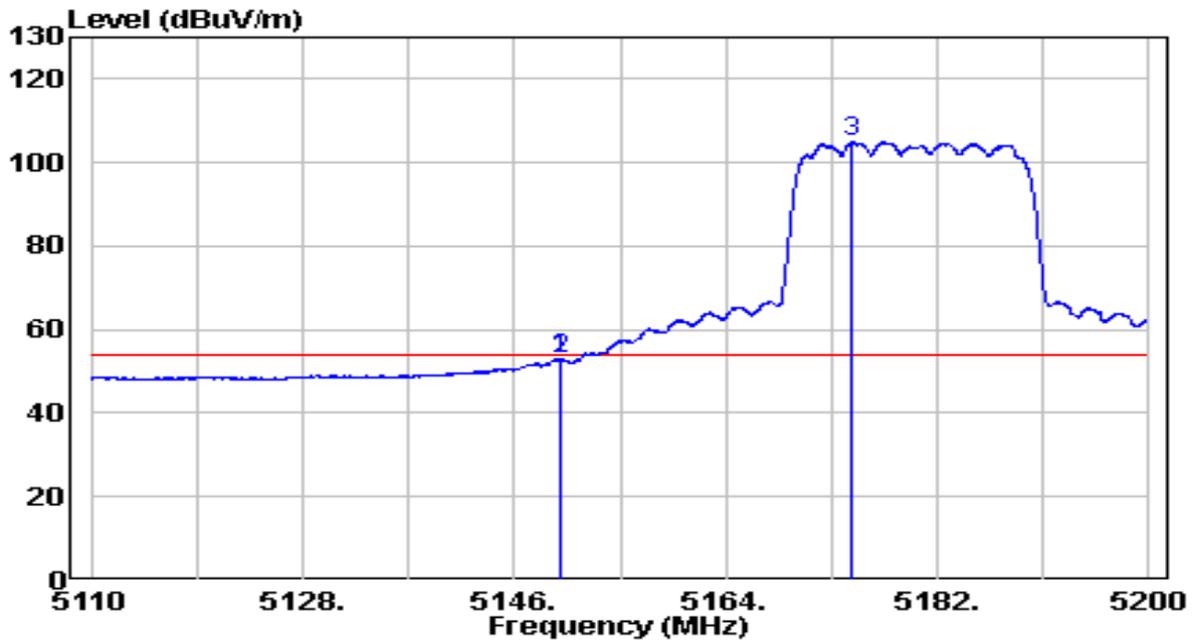


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.825	33.12	19.91	53.02	-0.98	54.00	Average
2	5150.000	32.92	19.91	52.83	-1.17	54.00	Average
3	* 5174.665	85.07	19.93	105.00	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	120V/60Hz

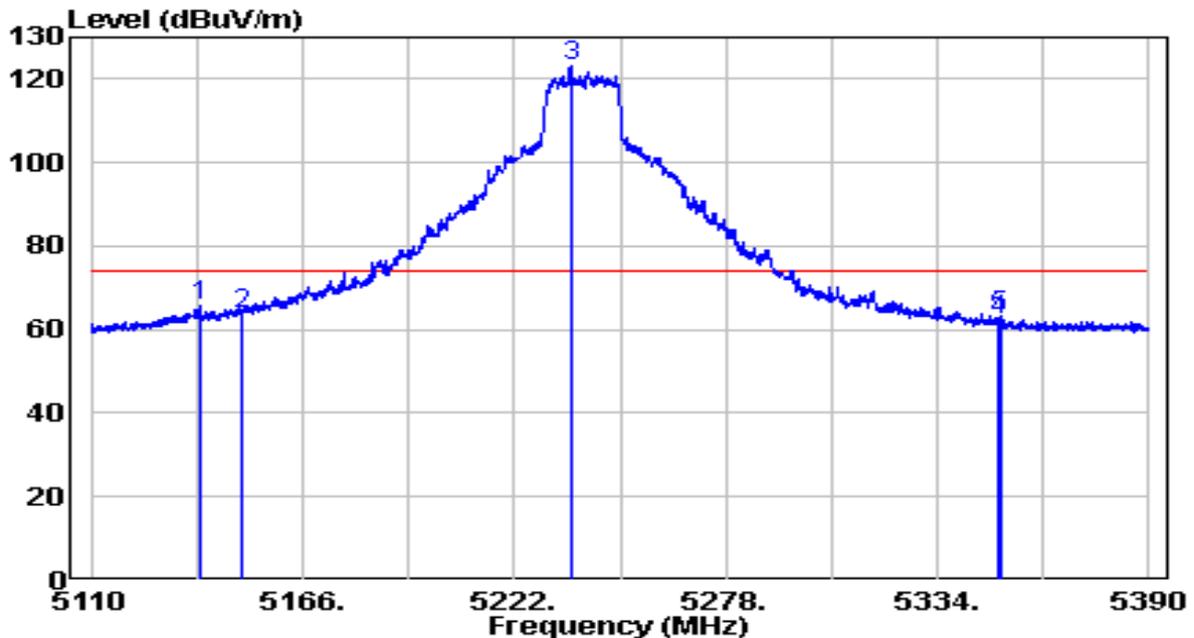


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5138.560	45.95	19.89	65.84	-8.16	74.00	Peak
2	5150.000	43.97	19.91	63.87	-10.13	74.00	Peak
3	* 5236.980	102.99	20.00	122.99	N/A	N/A	Peak
4	5350.000	42.03	20.11	62.14	-11.86	74.00	Peak
5	5350.520	43.15	20.11	63.27	-10.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	120V/60Hz

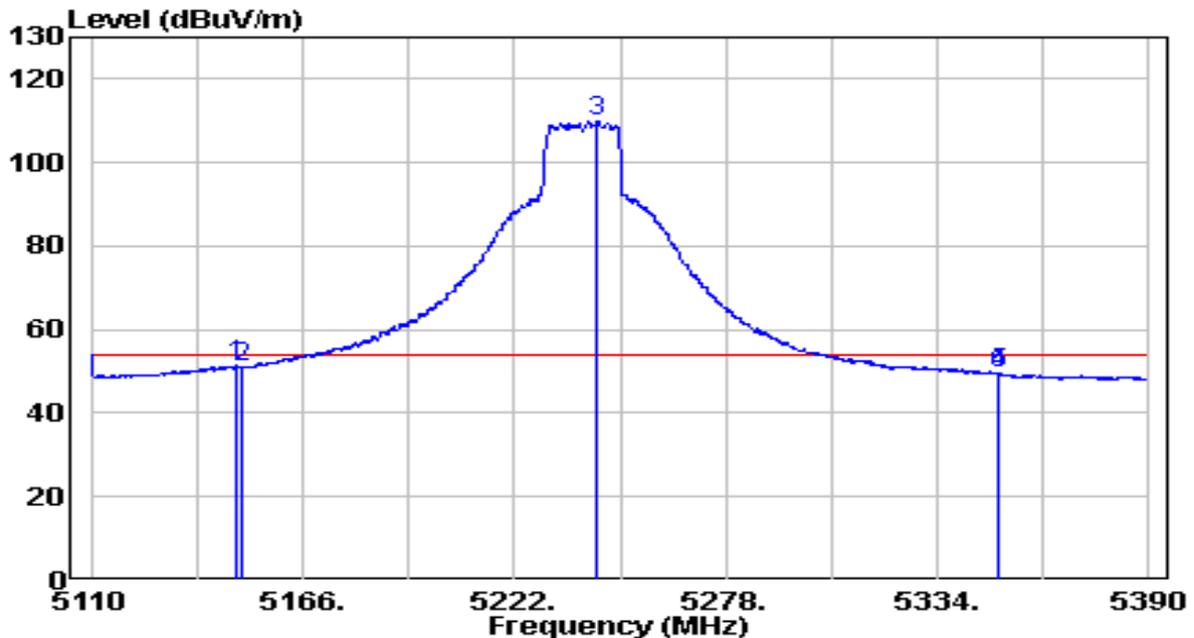


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.500	31.47	19.90	51.38	-2.62	54.00	Average
2	5150.000	30.91	19.91	50.81	-3.19	54.00	Average
3	* 5244.120	89.89	20.00	109.90	N/A	N/A	Average
4	5349.960	29.28	20.11	49.39	-4.61	54.00	Average
5	5350.000	29.28	20.11	49.39	-4.61	54.00	Average

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	120V/60Hz

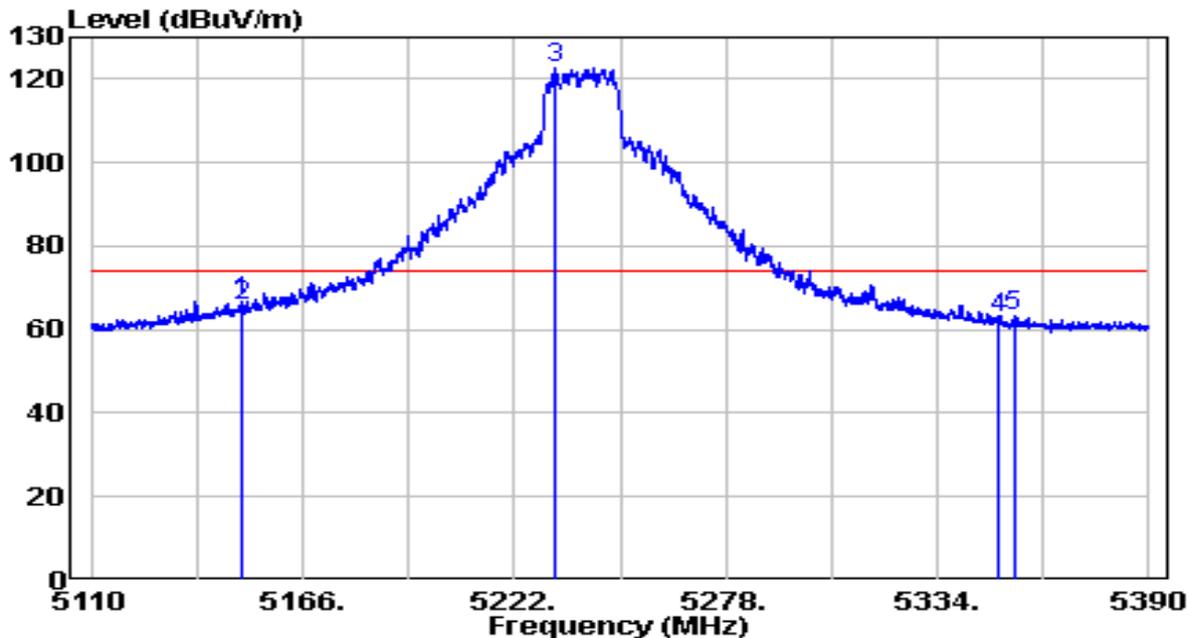


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.620	46.84	19.91	66.75	-7.25	74.00	Peak
2	5150.000	45.59	19.91	65.50	-8.50	74.00	Peak
3	* 5232.780	102.62	19.99	122.61	N/A	N/A	Peak
4	5350.000	42.48	20.11	62.60	-11.40	74.00	Peak
5	5354.160	43.29	20.12	63.41	-10.59	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	120V/60Hz

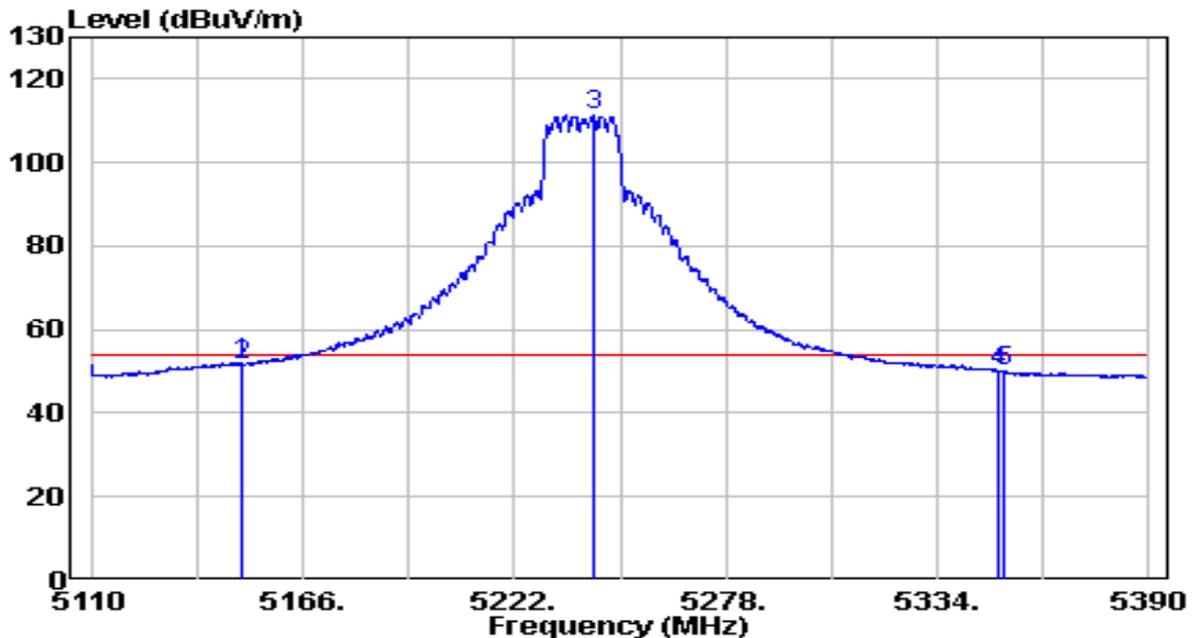


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.760	32.16	19.91	52.07	-1.93	54.00	Average
2	5150.000	31.78	19.91	51.68	-2.32	54.00	Average
3 *	5242.720	91.20	20.00	111.20	N/A	N/A	Average
4	5350.000	29.83	20.11	49.95	-4.05	54.00	Average
5	5351.500	30.08	20.12	50.20	-3.80	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	120V/60Hz

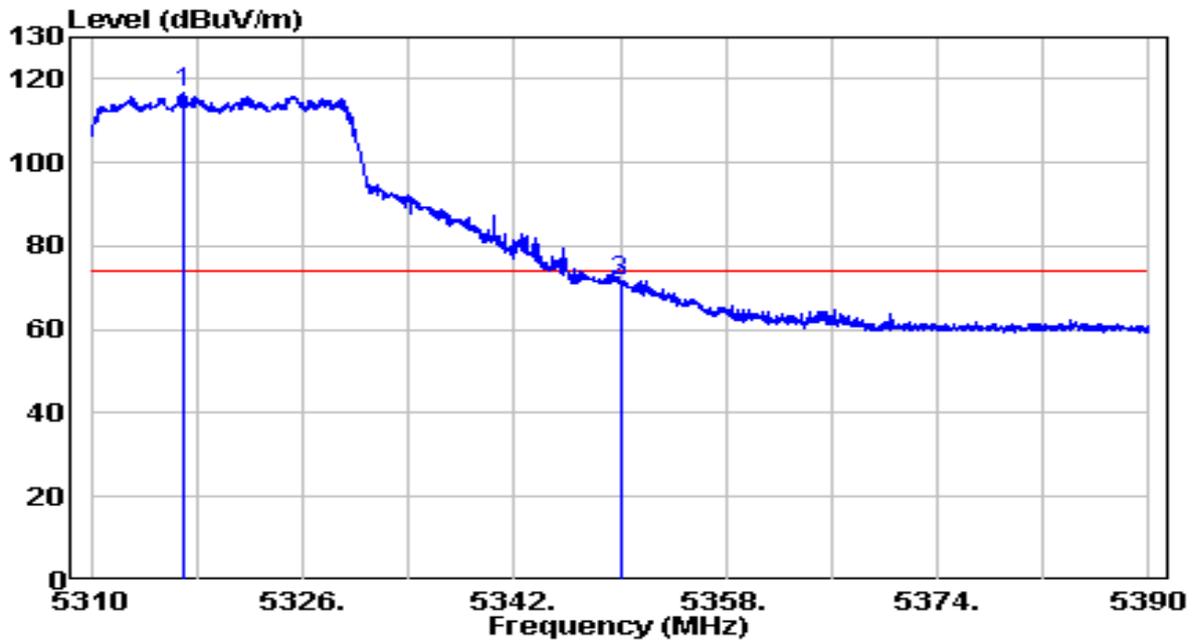


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	96.52	20.08	116.60	N/A	N/A	Peak
2		51.50	20.11	71.62	-2.38	74.00	Peak
3		51.50	20.11	71.62	-2.38	74.00	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	120V/60Hz

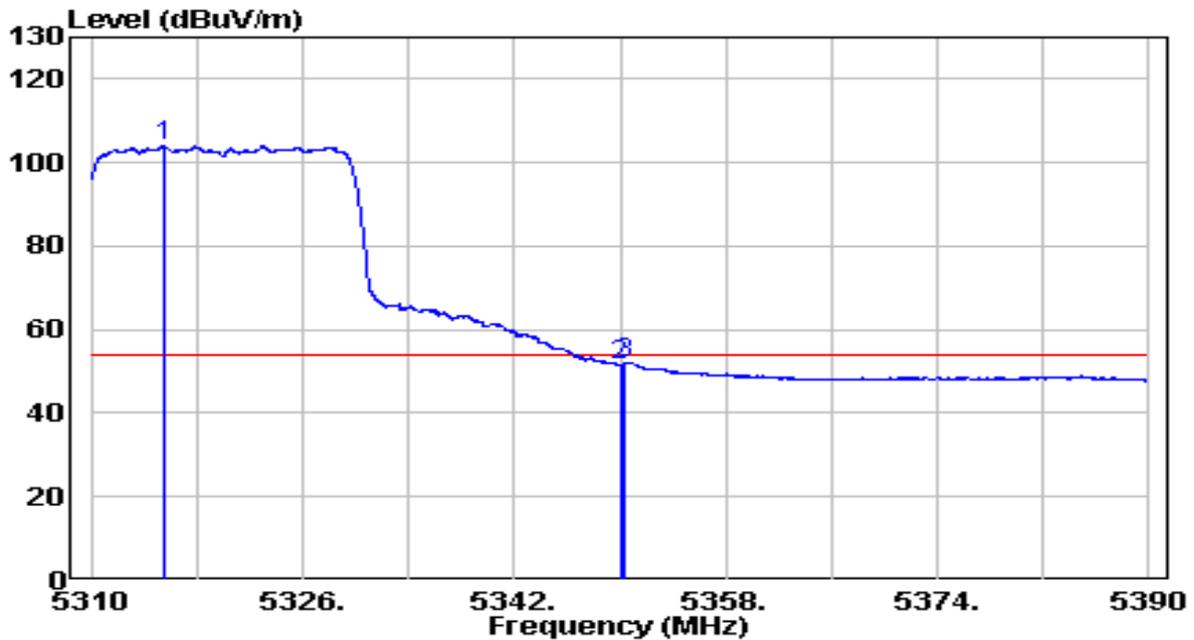


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5315.480	83.92	20.08	104.00	N/A	N/A	Average
2	5350.000	31.54	20.11	51.65	-2.35	54.00	Average
3	5350.320	31.96	20.11	52.07	-1.93	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	120V/60Hz

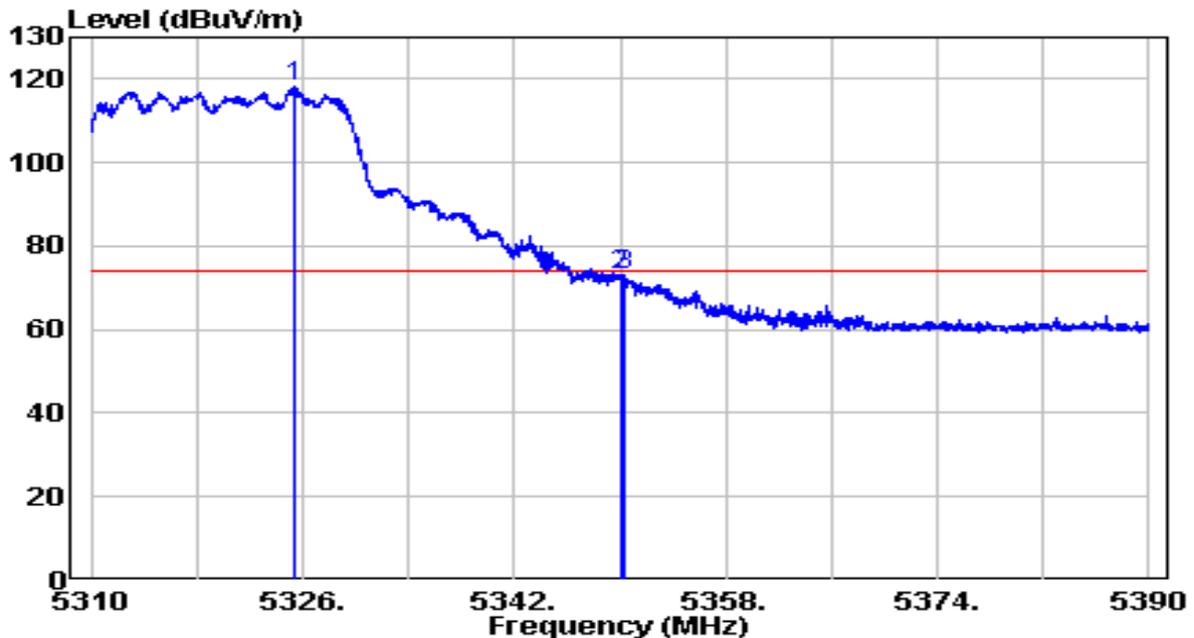


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5325.320	97.92	20.09	118.01	N/A	N/A	Peak
2	5350.000	52.81	20.11	72.93	-1.07	74.00	Peak
3	5350.280	53.06	20.11	73.17	-0.83	74.00	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	120V/60Hz

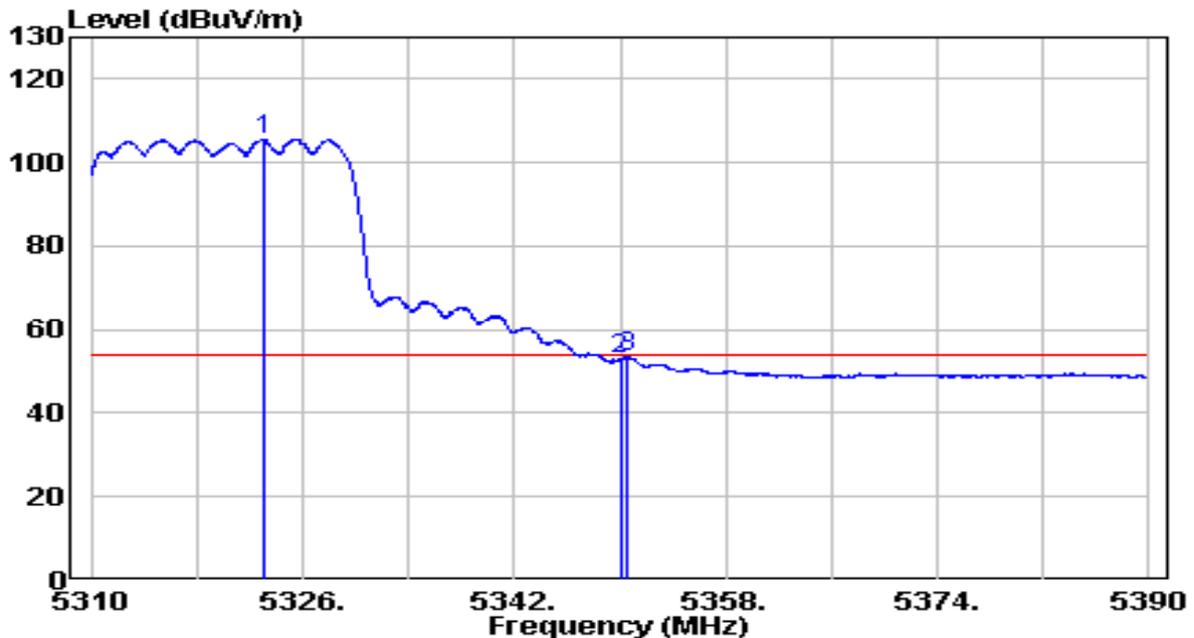


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5323.040	85.55	20.09	105.64	N/A	N/A	Average
2	5350.000	32.79	20.11	52.91	-1.09	54.00	Average
3	5350.480	33.22	20.11	53.34	-0.66	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	120V/60Hz

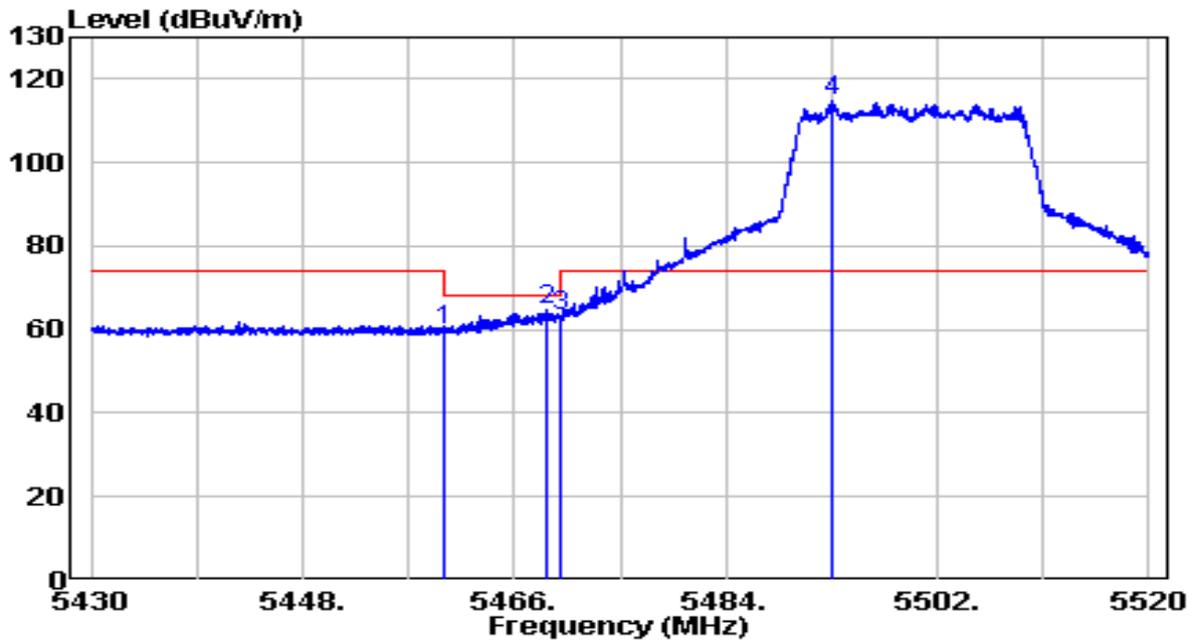


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	39.56	20.23	59.79	-8.41	68.20	Peak
2	5468.790	44.48	20.24	64.72	-3.48	68.20	Peak
3	5470.000	42.81	20.24	63.05	-5.15	68.20	Peak
4 *	5493.090	94.41	20.26	114.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	120V/60Hz

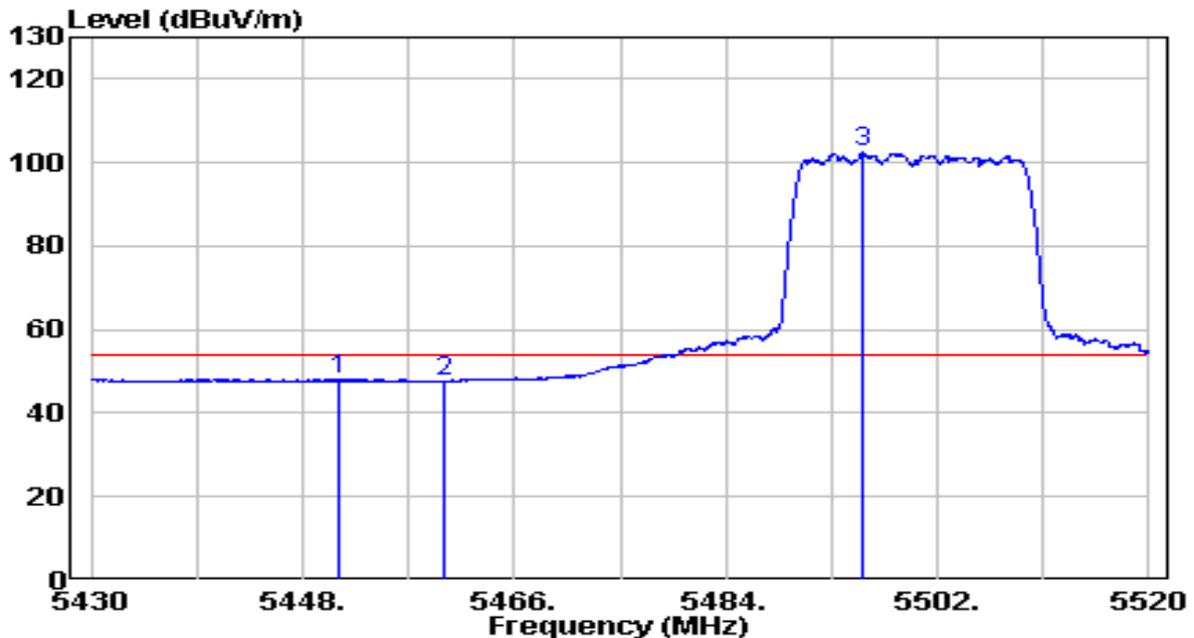


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.015	27.90	20.22	48.11	-5.89	54.00	Average
2	5460.000	27.47	20.23	47.70	-6.30	54.00	Average
3	* 5495.745	82.03	20.27	102.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	120V/60Hz

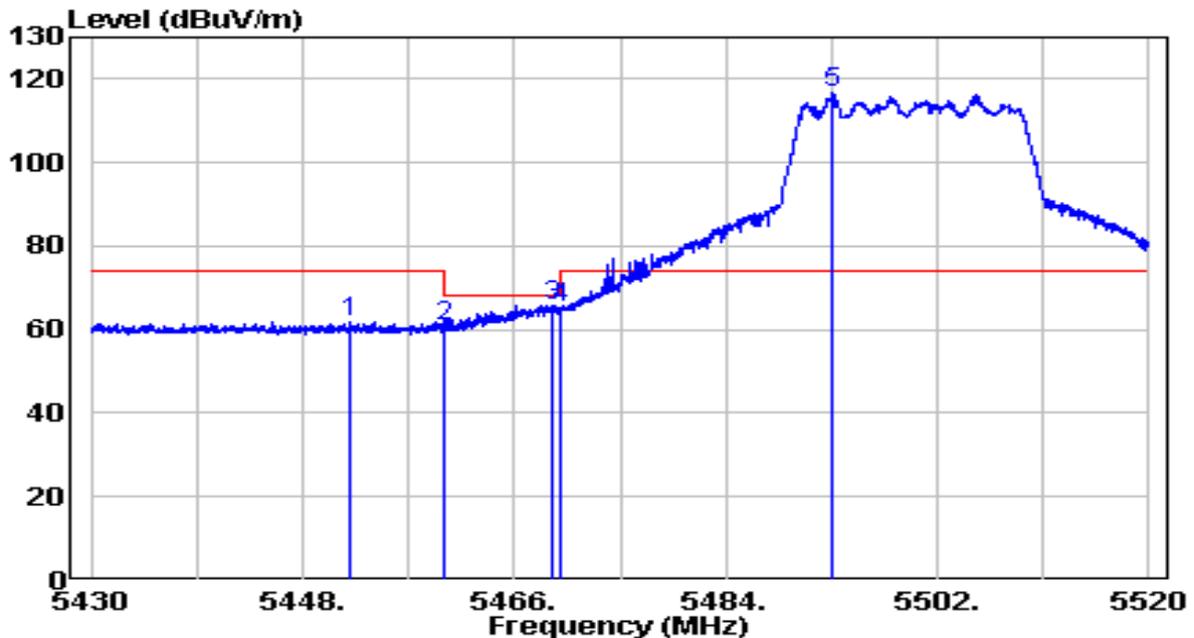


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.960	41.75	20.22	61.97	-12.03	74.00	Peak
2	5460.000	40.57	20.23	60.80	-7.40	68.20	Peak
3	5469.150	45.71	20.24	65.94	-2.26	68.20	Peak
4	5470.000	44.87	20.24	65.10	-3.10	68.20	Peak
5 *	5493.000	96.45	20.26	116.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	120V/60Hz

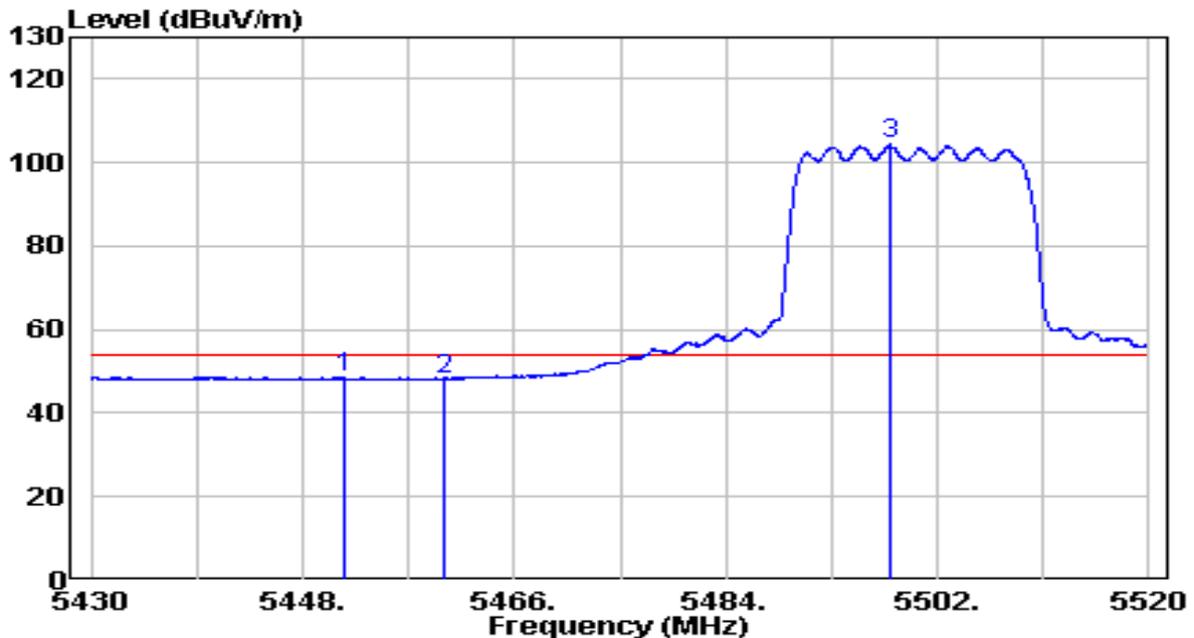


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.510	28.33	20.22	48.55	-5.45	54.00	Average
2	5460.000	27.85	20.23	48.08	-5.92	54.00	Average
3	* 5497.995	84.00	20.27	104.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz	Test Voltage	120V/60Hz

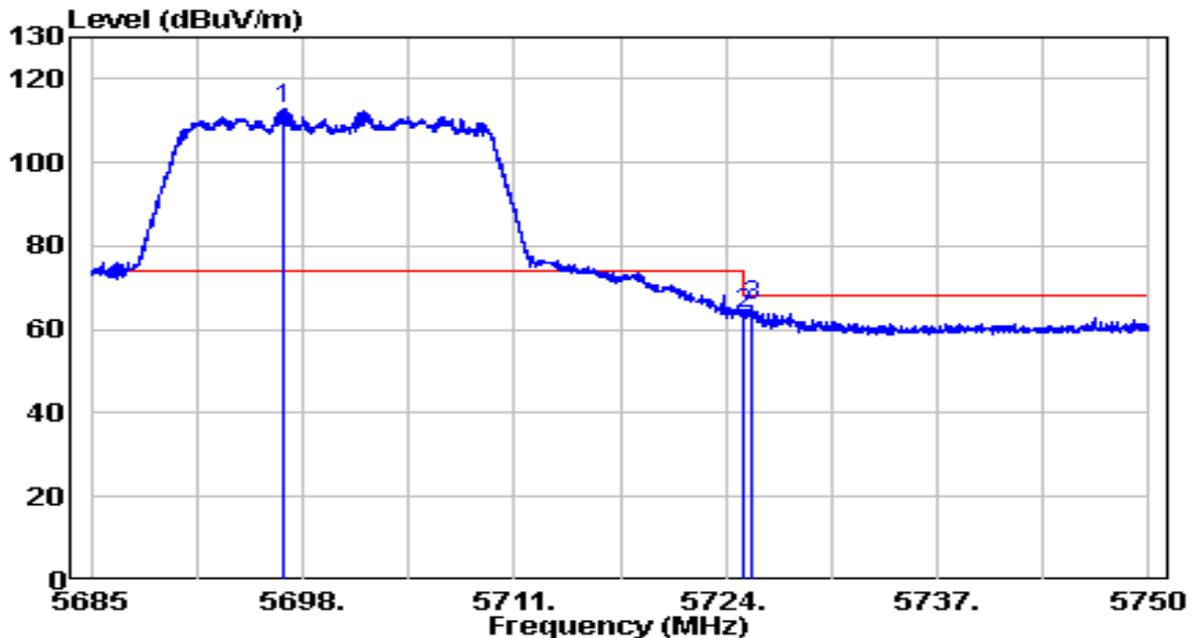


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5696.797	91.82	20.91	112.72	N/A	N/A	Peak
2	5725.000	42.81	21.00	63.81	-4.39	68.20	Peak
3	5725.560	44.90	21.00	65.90	-2.30	68.20	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz	Test Voltage	120V/60Hz

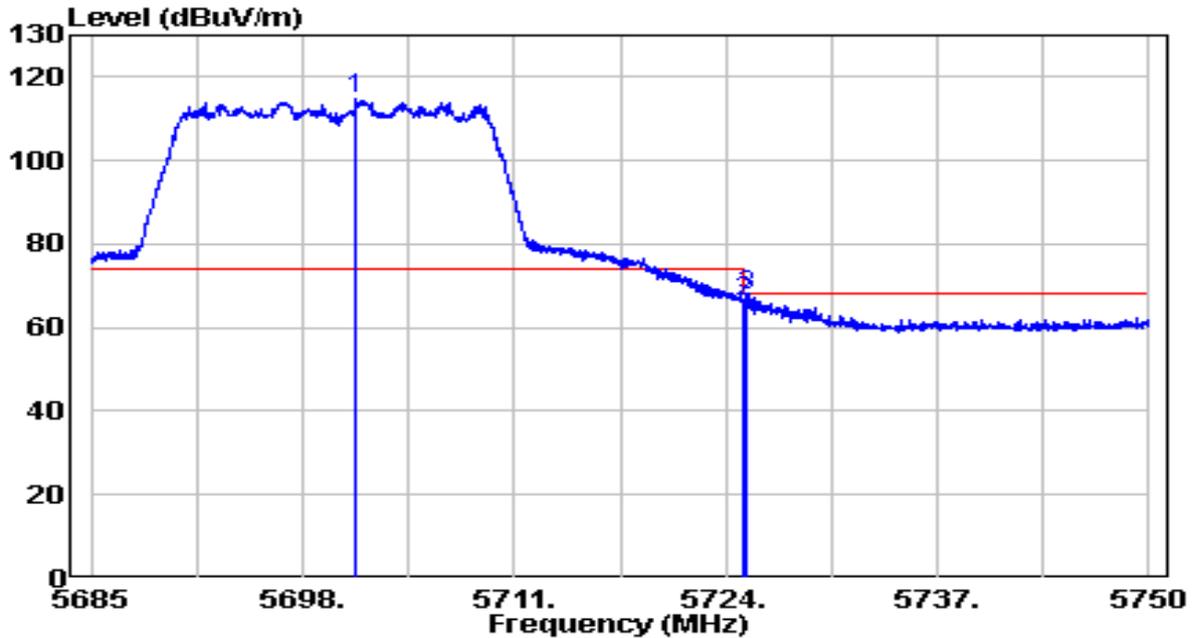


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5701.315	93.88	20.92	114.80	N/A	N/A	Peak
2	5725.000	45.31	21.00	66.31	-1.89	68.20	Peak
3	5725.203	46.93	21.00	67.93	-0.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz	Test Voltage	120V/60Hz

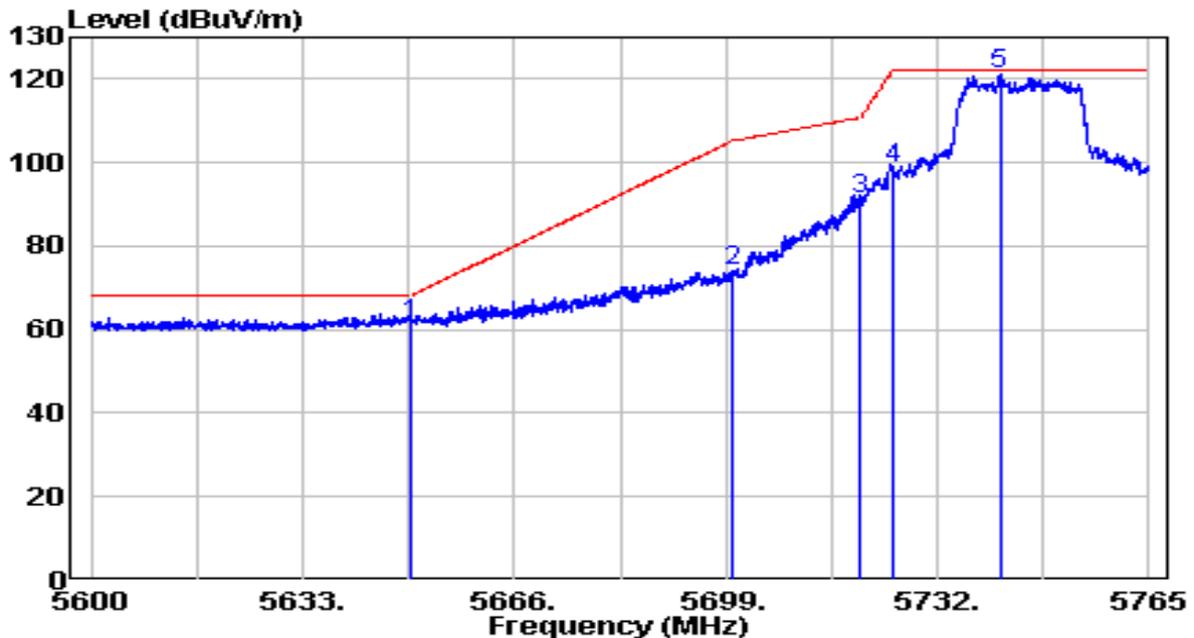


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.00	5650.000	40.59	20.76	61.35	-6.85	68.20	Peak
2		5700.000	53.06	20.92	73.97	-31.23	105.20	Peak
3	0.00	5720.000	70.31	20.98	91.29	-19.51	110.80	Peak
4	0.00	5725.000	77.76	21.00	98.76	-23.44	122.20	Peak
5	*	5741.735	100.29	21.05	121.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz	Test Voltage	120V/60Hz

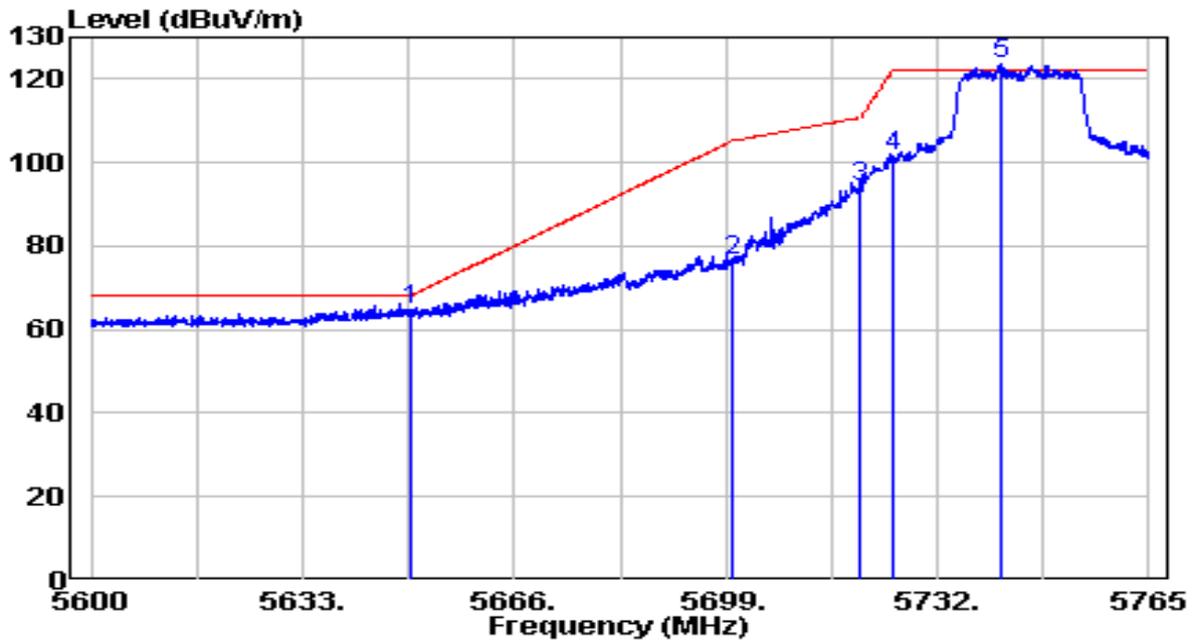


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5650.000	43.92	20.76	64.68	-3.52	68.20	Average
2	5700.000	55.50	20.92	76.42	-28.78	105.20	Average
3	5720.000	73.03	20.98	94.01	-16.79	110.80	Average
4	5725.000	80.41	21.00	101.41	-20.79	122.20	Average
5 *	5742.065	102.71	21.05	123.76	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz	Test Voltage	120V/60Hz

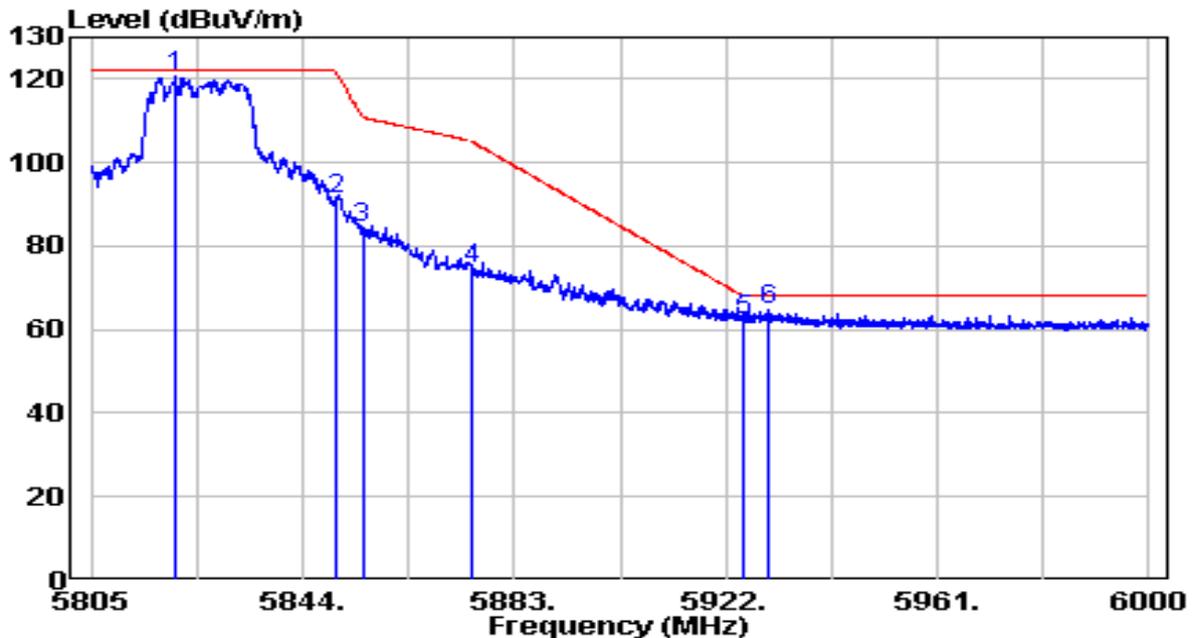


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5820.405	99.20	21.31	120.51	N/A	N/A	Peak
2	5850.000	69.61	21.40	91.02	-31.18	122.20	Peak
3	5855.000	62.80	21.42	84.22	-26.58	110.80	Peak
4	5875.000	53.28	21.49	74.76	-30.44	105.20	Peak
5	5925.000	40.61	21.65	62.26	-5.94	68.20	Peak
6	5929.703	43.16	21.66	64.82	-3.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz	Test Voltage	120V/60Hz

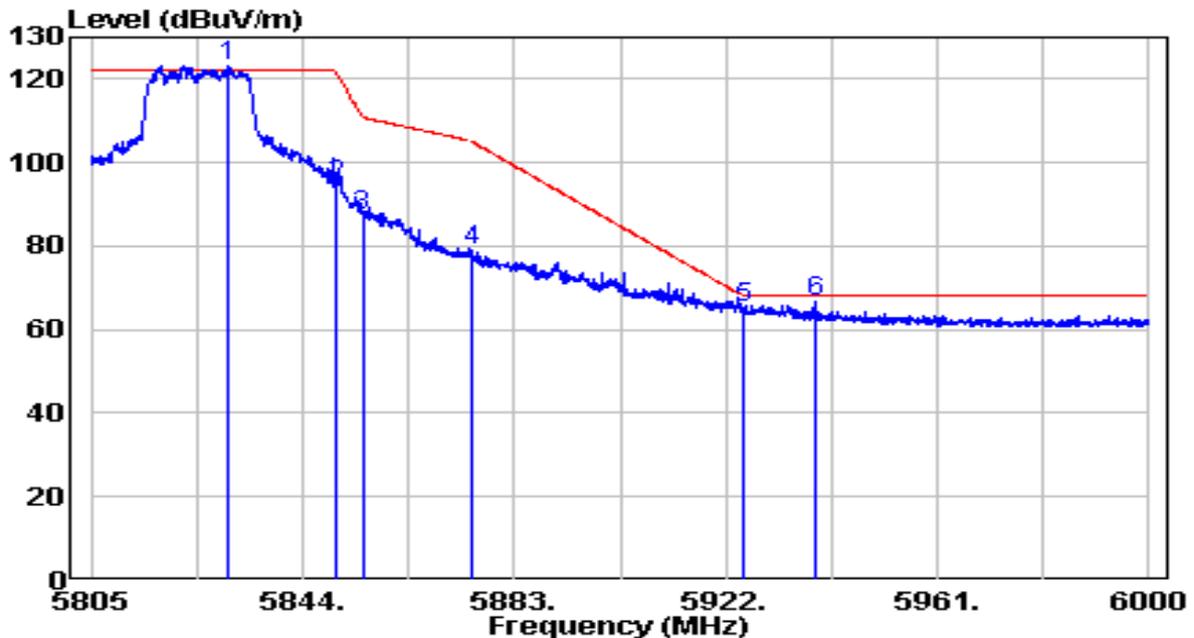


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5830.155	101.63	21.34	122.97	N/A	N/A	Peak
2	5850.045	73.09	21.40	94.49	-27.61	122.10	Peak
3	5855.000	66.08	21.42	87.50	-23.30	110.80	Peak
4	5875.000	57.67	21.49	79.16	-26.04	105.20	Peak
5	5925.000	43.55	21.65	65.19	-3.01	68.20	Peak
6	5938.283	45.18	21.69	66.87	-1.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	120V/60Hz

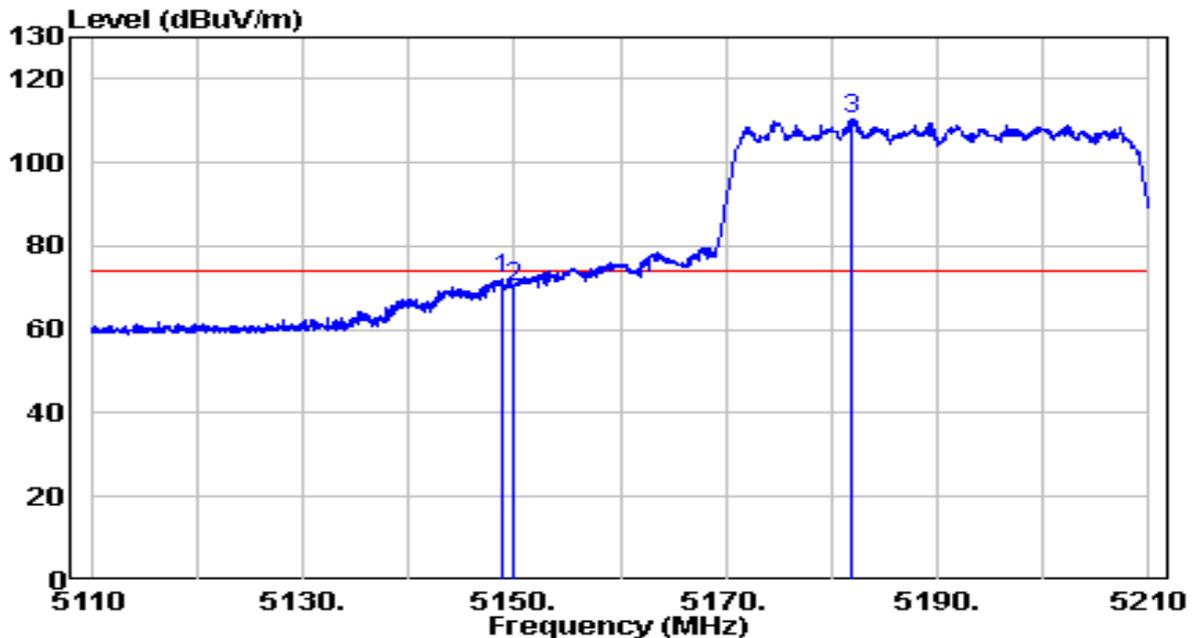


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.800	52.00	19.90	71.90	-2.10	74.00	Peak
2	5150.000	50.42	19.91	70.32	-3.68	74.00	Peak
3	* 5182.000	90.62	19.94	110.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	120V/60Hz

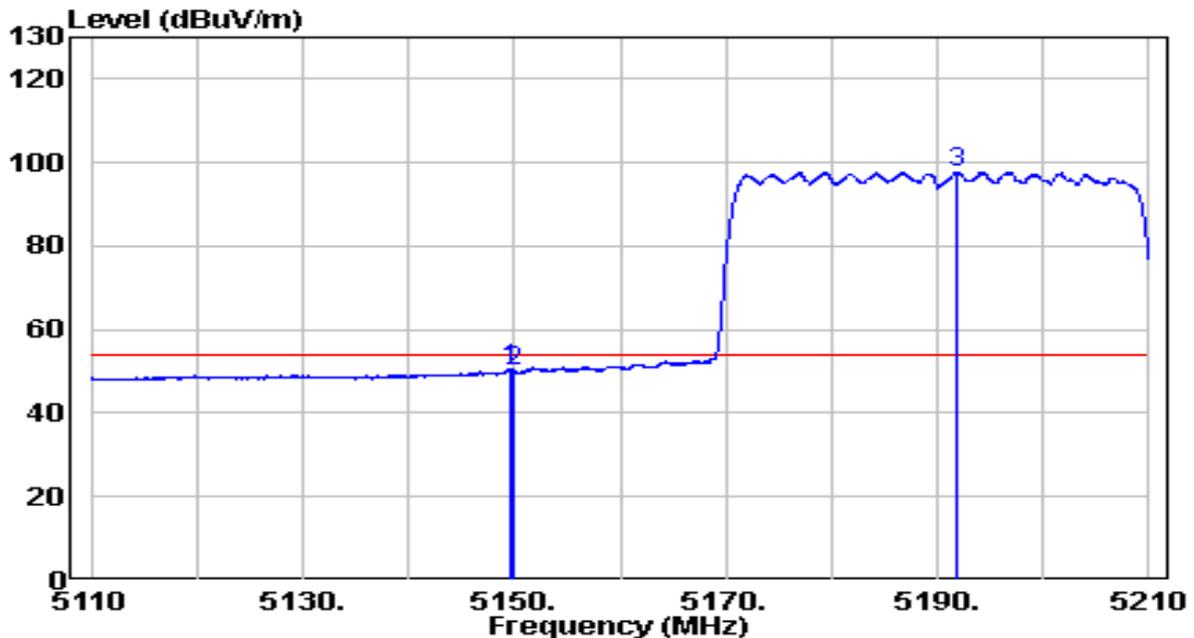


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.550	30.49	19.91	50.40	-3.60	54.00	Average
2	5150.000	30.14	19.91	50.04	-3.96	54.00	Average
3	* 5191.950	77.83	19.95	97.78	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	120V/60Hz

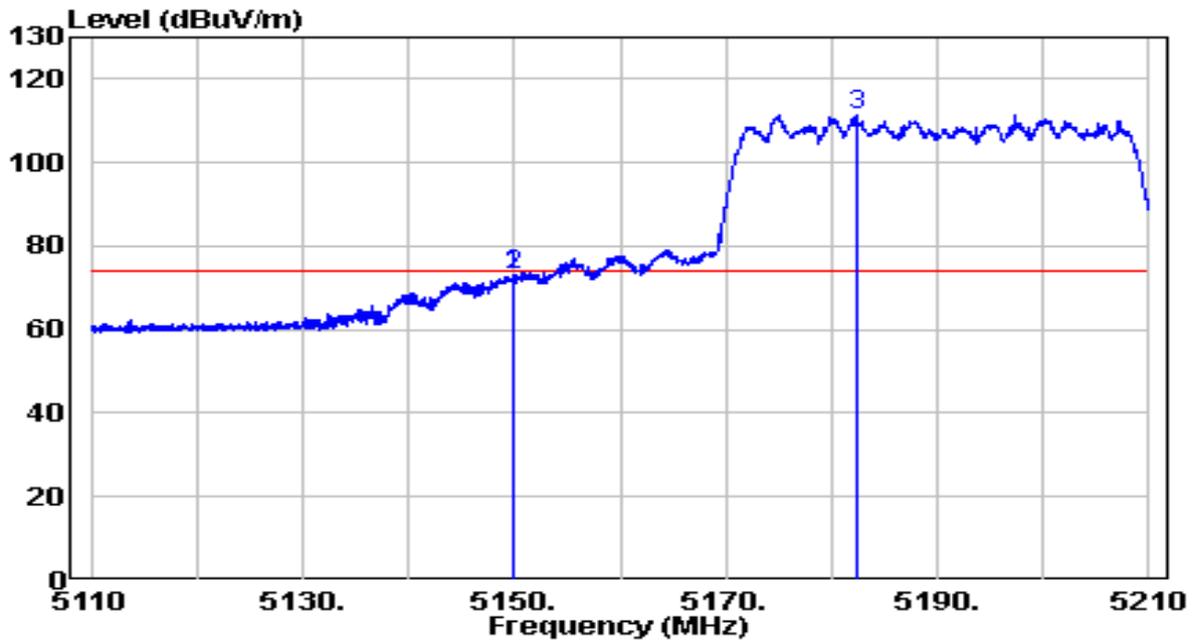


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	53.12	19.91	73.02	-0.98	74.00	Peak
2	5150.000	53.12	19.91	73.02	-0.98	74.00	Peak
3	* 5182.300	91.59	19.94	111.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	120V/60Hz

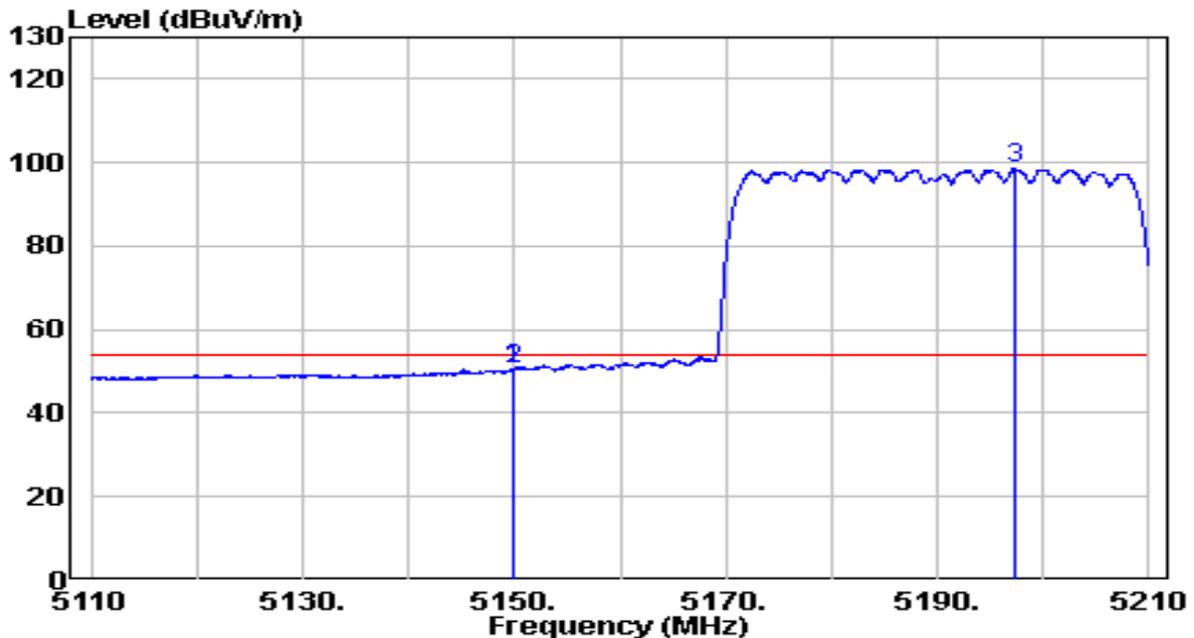


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	30.55	19.91	50.45	-3.55	54.00	Average
2	5150.000	30.56	19.91	50.46	-3.54	54.00	Average
3	* 5197.250	78.55	19.96	98.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	120V/60Hz

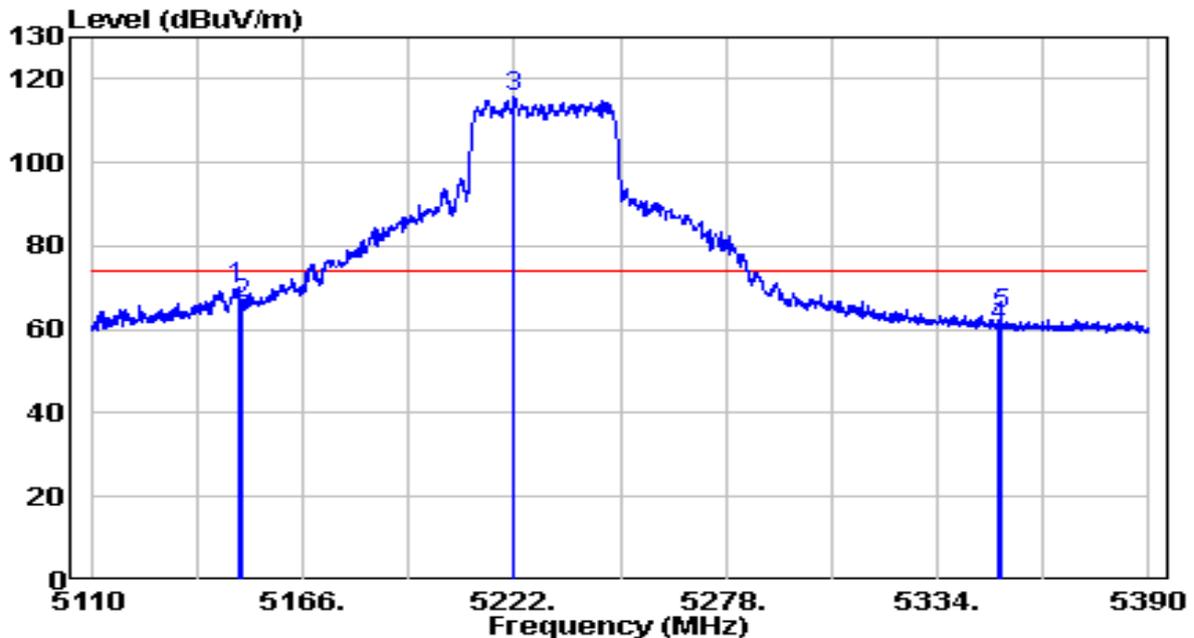


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5148.780	50.18	19.90	70.09	-3.91	74.00	Peak
2	5150.000	46.18	19.91	66.09	-7.91	74.00	Peak
3	* 5221.860	95.68	19.98	115.66	N/A	N/A	Peak
4	5350.000	40.76	20.11	60.87	-13.13	74.00	Peak
5	5350.660	43.47	20.11	63.59	-10.41	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	120V/60Hz

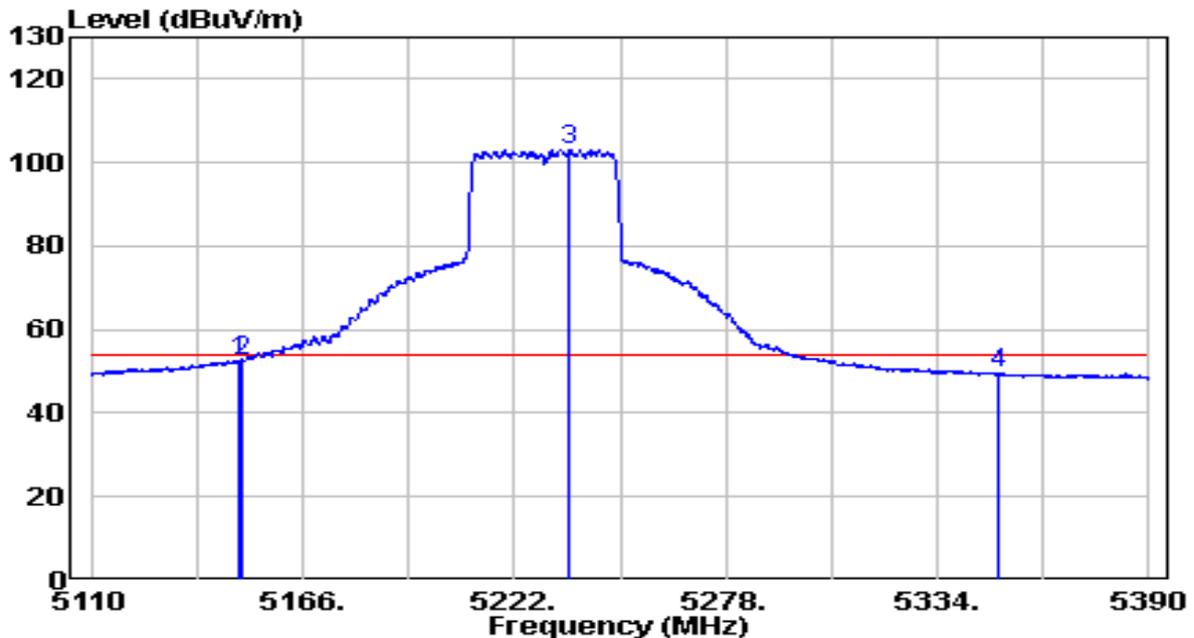


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.200	32.78	19.91	52.69	-1.31	54.00	Average
2	5150.000	32.72	19.91	52.63	-1.37	54.00	Average
3	* 5236.560	83.22	20.00	103.22	N/A	N/A	Average
4	5350.000	29.49	20.11	49.60	-4.40	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	120V/60Hz

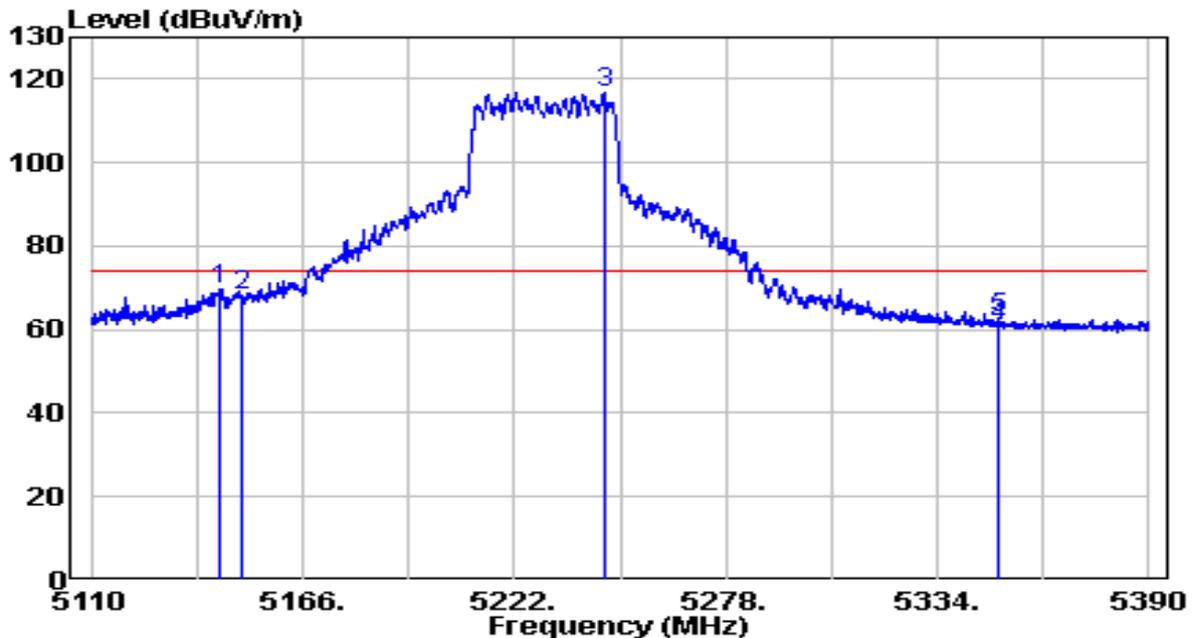


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5144.020	49.70	19.90	69.60	-4.40	74.00	Peak
2	5150.000	48.10	19.91	68.01	-5.99	74.00	Peak
3	* 5245.660	96.95	20.01	116.95	N/A	N/A	Peak
4	5350.000	40.49	20.11	60.60	-13.40	74.00	Peak
5	5350.240	42.60	20.11	62.72	-11.28	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	120V/60Hz

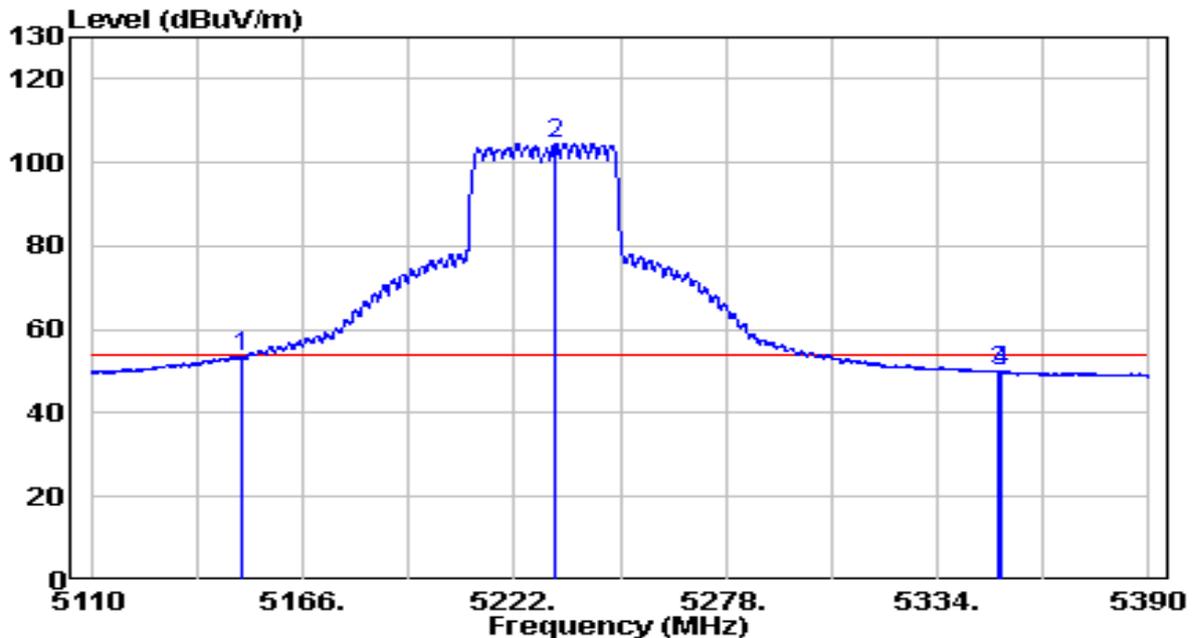


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.00	5150.040	33.80	19.91	53.71	-0.29	54.00	Average
2	*	5233.060	84.65	19.99	104.64	N/A	N/A	Average
3		5350.000	29.85	20.11	49.96	-4.04	54.00	Average
4		5350.660	30.04	20.11	50.15	-3.85	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	120V/60Hz

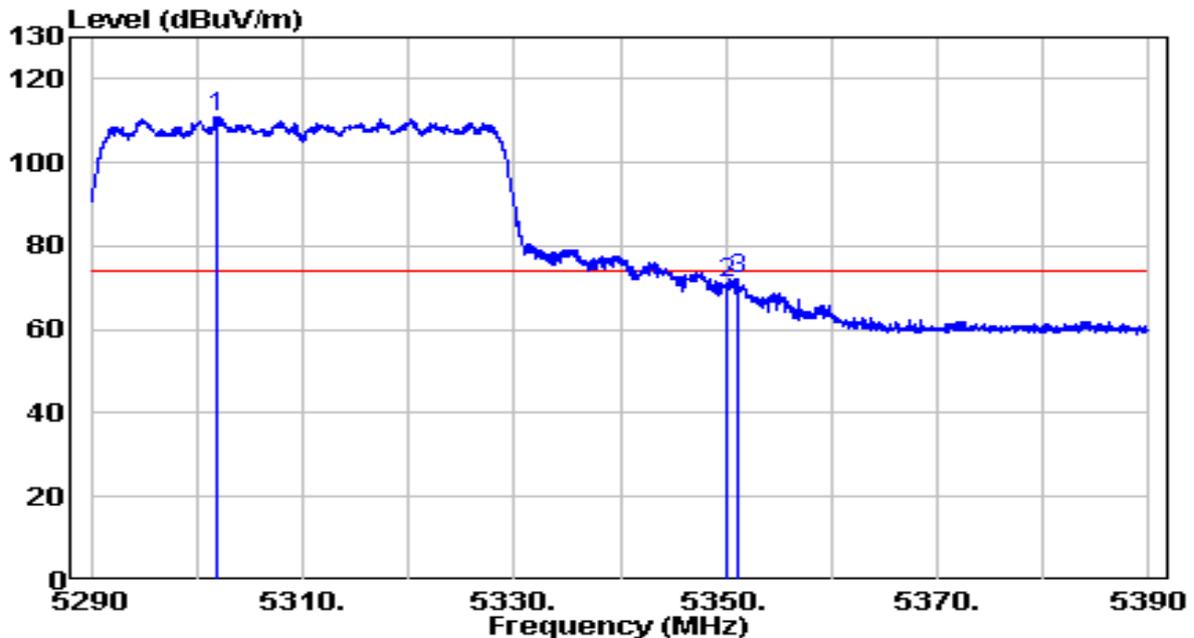


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5302.000	90.83	20.06	110.89	N/A	N/A	Peak
2	5350.000	51.10	20.11	71.21	-2.79	74.00	Peak
3	5351.050	51.91	20.12	72.03	-1.97	74.00	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	120V/60Hz

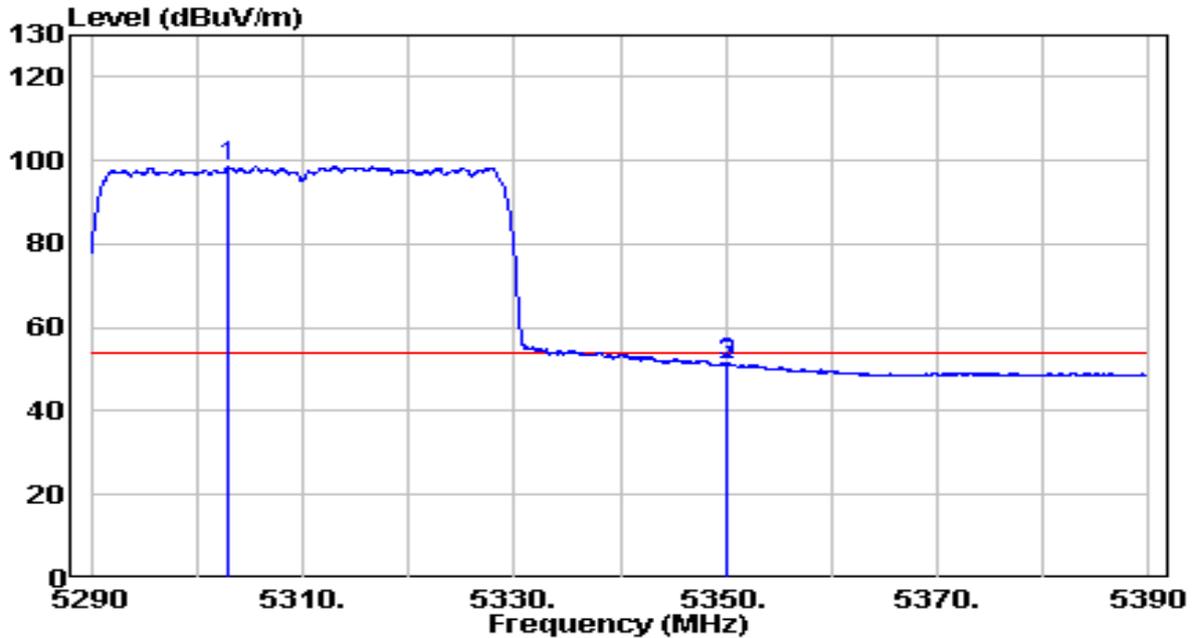


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5303.000	78.44	20.07	98.50	N/A	N/A	Average
2	5350.000	31.12	20.11	51.23	-2.77	54.00	Average
3	5350.150	31.21	20.11	51.33	-2.67	54.00	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	120V/60Hz

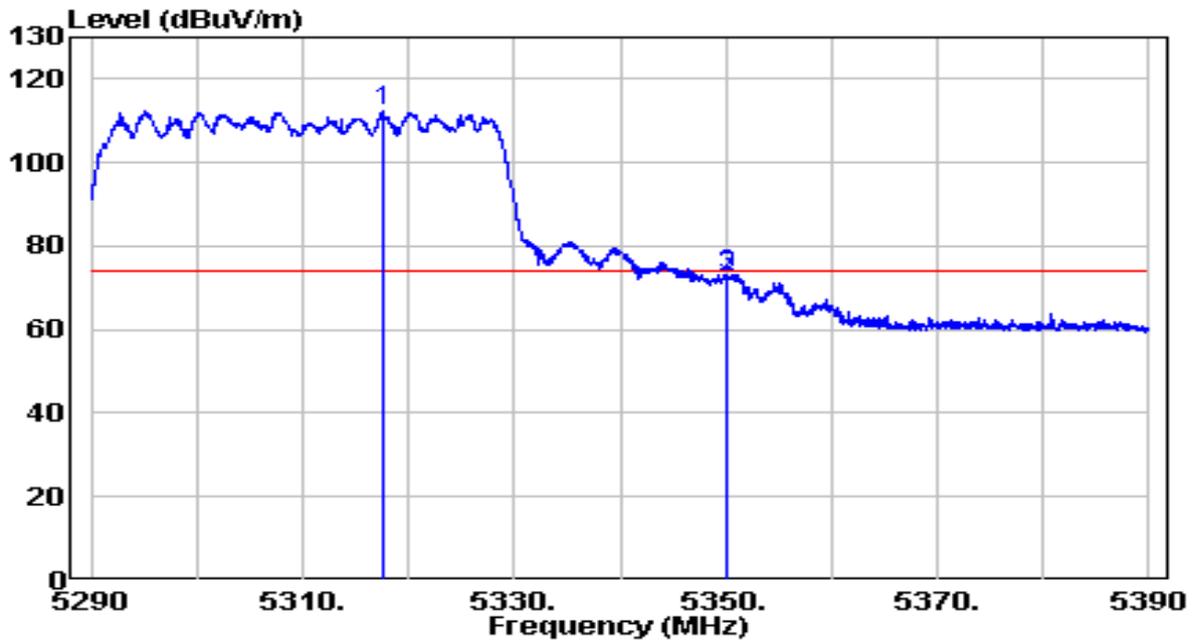


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5317.550	92.36	20.08	112.44	N/A	N/A	Peak
2	5350.000	52.43	20.11	72.54	-1.46	74.00	Peak
3	5350.200	52.92	20.11	73.03	-0.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	120V/60Hz

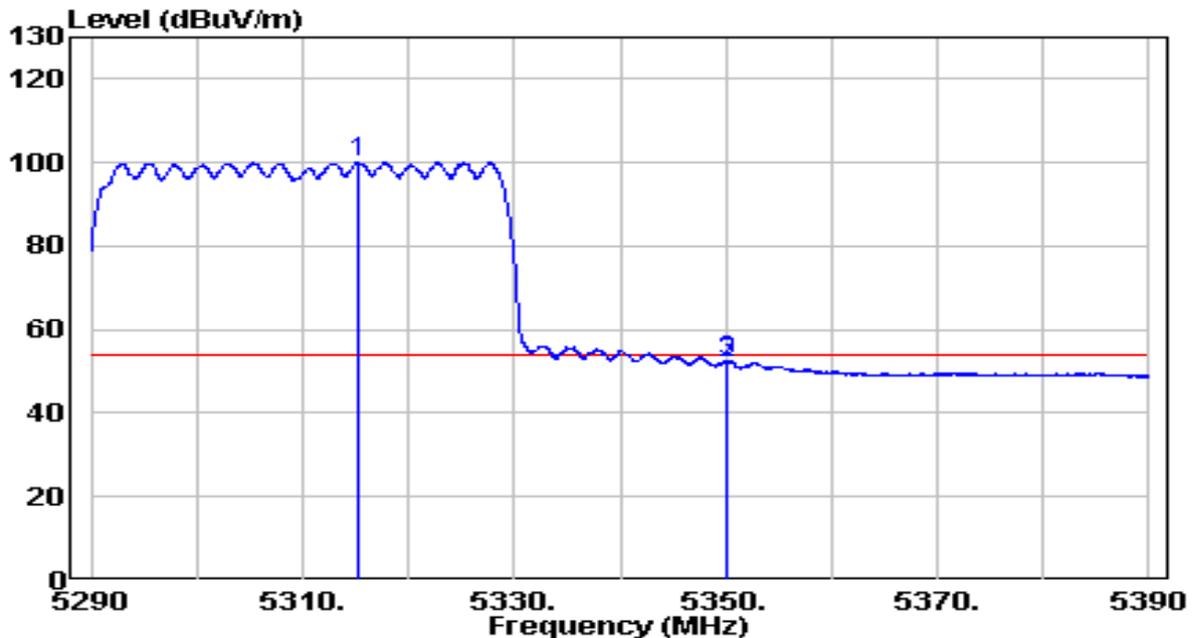


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5315.150	80.02	20.08	100.09	N/A	N/A	Average
2	5350.000	32.08	20.11	52.19	-1.81	54.00	Average
3	5350.150	32.39	20.11	52.50	-1.50	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	120V/60Hz

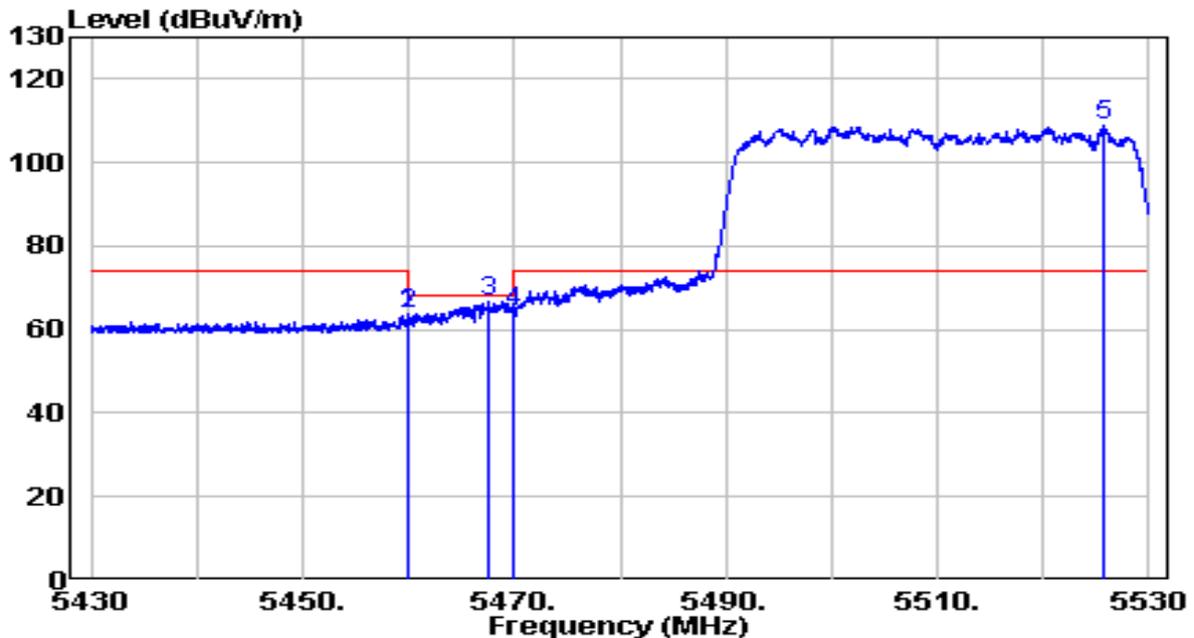


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5459.900	43.67	20.23	63.91	-4.30	68.20	Peak
2	5460.000	43.68	20.23	63.91	-4.29	68.20	Peak
3	5467.550	46.28	20.24	66.52	-1.68	68.20	Peak
4	5470.000	43.88	20.24	64.12	-4.08	68.20	Peak
5 *	5525.700	88.63	20.35	108.98	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	120V/60Hz

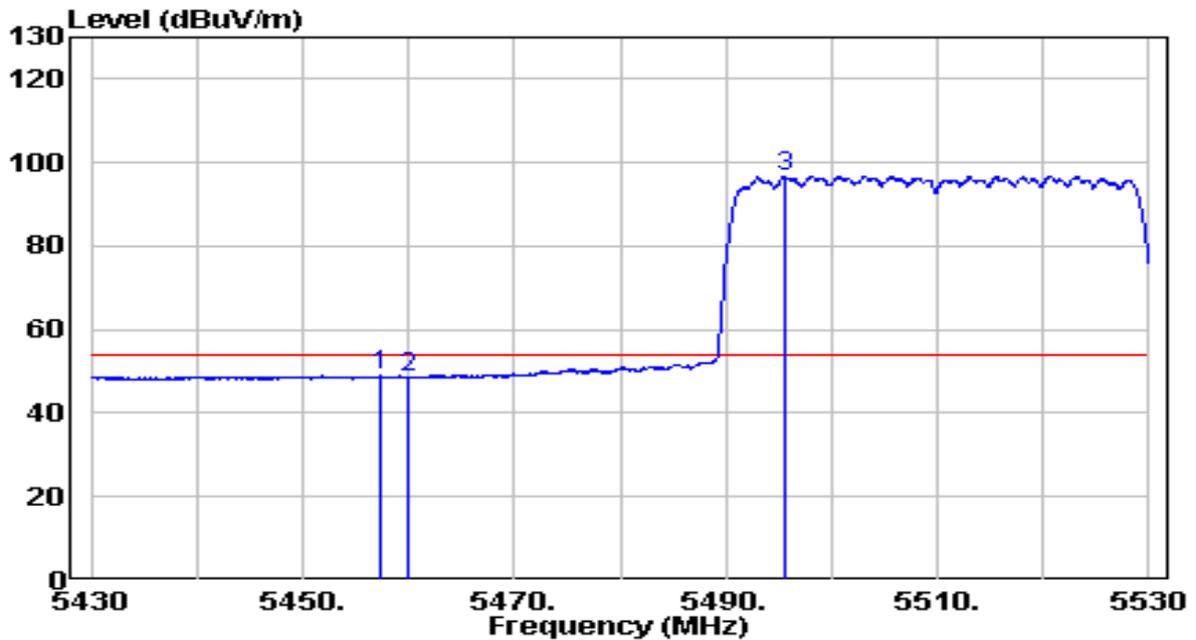


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.350	28.71	20.23	48.94	-5.06	54.00	Average
2	5460.000	28.30	20.23	48.53	-5.47	54.00	Average
3	* 5495.550	76.55	20.27	96.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	120V/60Hz

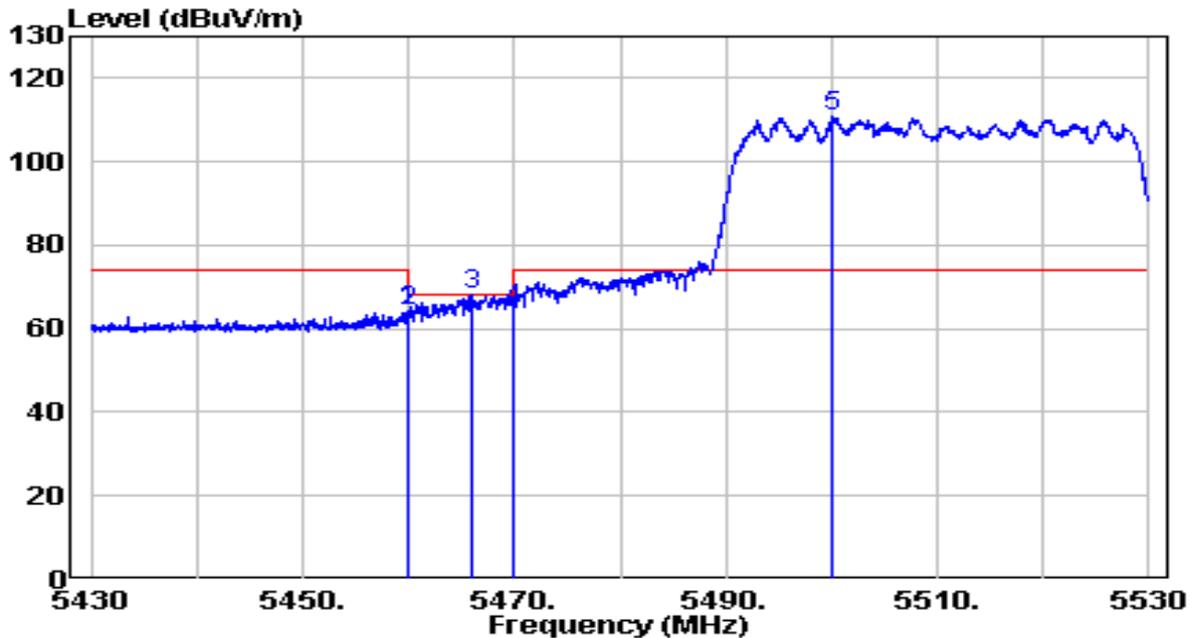


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	44.18	20.23	64.40	-3.80	68.20	Peak
2	5460.000	44.18	20.23	64.40	-3.80	68.20	Peak
3	5465.900	47.77	20.23	68.01	-0.19	68.20	Peak
4	5470.000	44.70	20.24	64.94	-3.26	68.20	Peak
5	* 5500.150	90.74	20.27	111.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	120V/60Hz

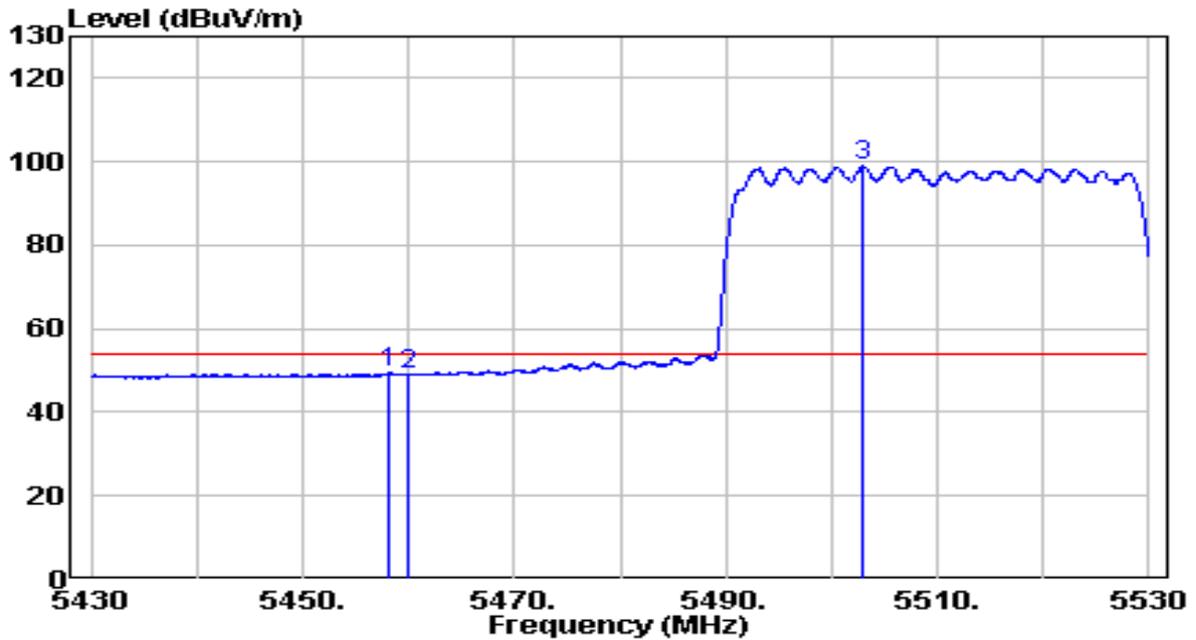


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.050	29.21	20.23	49.43	-4.57	54.00	Average
2	5460.000	28.72	20.23	48.95	-5.05	54.00	Average
3	* 5503.050	78.61	20.28	98.89	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz	Test Voltage	120V/60Hz

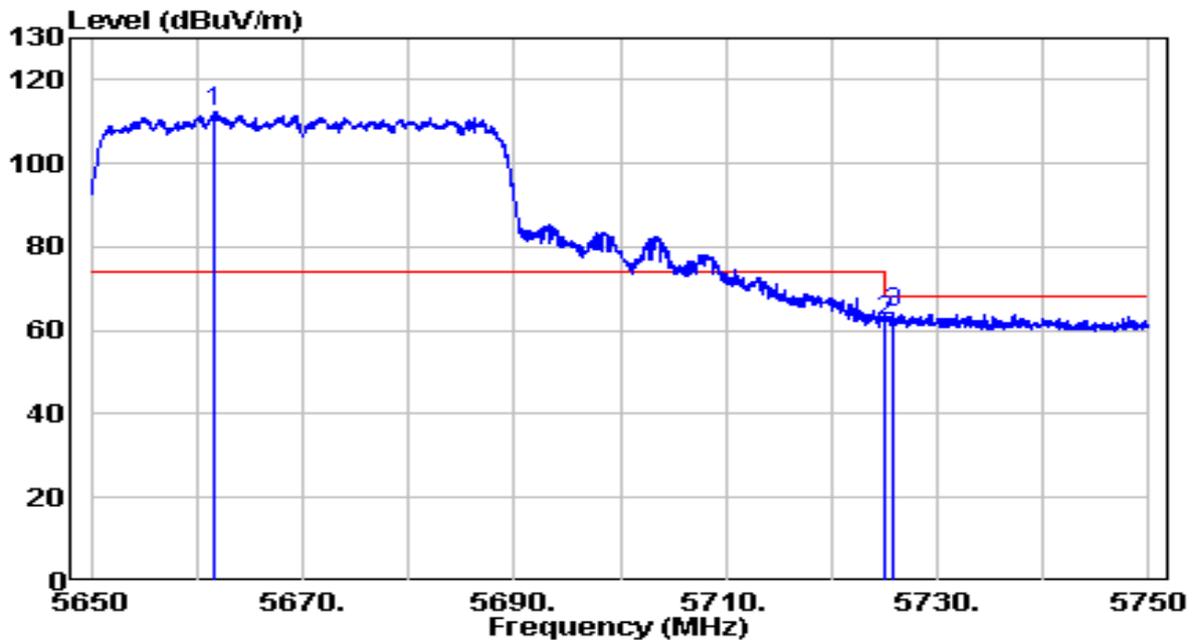


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5661.700	91.71	20.79	112.50	N/A	N/A	Peak
2	5725.000	41.42	21.00	62.42	-5.78	68.20	Peak
3	5725.750	43.35	21.00	64.35	-3.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz	Test Voltage	120V/60Hz

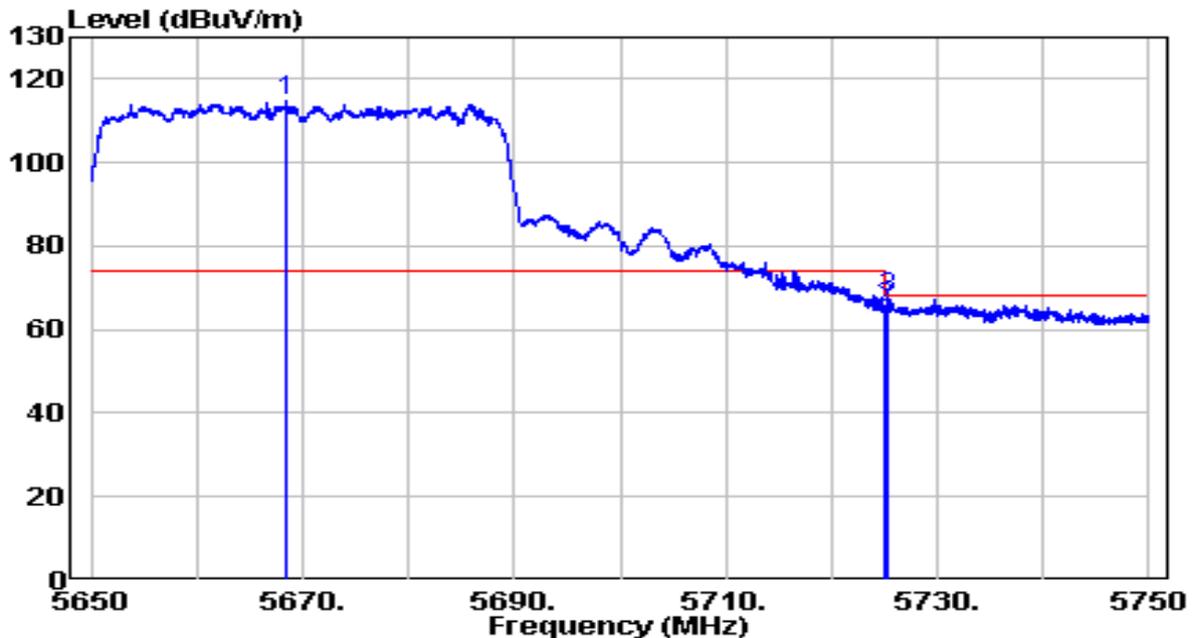


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5668.500	93.96	20.82	114.78	N/A	N/A	Peak
2	5725.000	44.33	21.00	65.33	-2.87	68.20	Peak
3	5725.200	46.75	21.00	67.75	-0.45	68.20	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz	Test Voltage	120V/60Hz

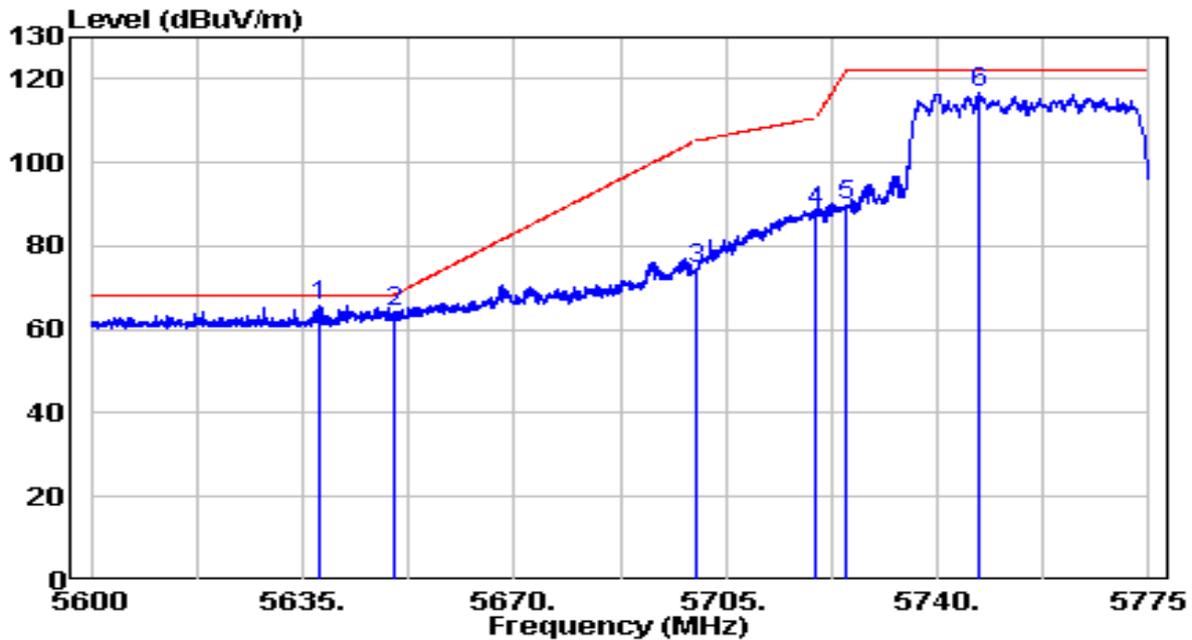


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5637.625	45.19	20.72	65.91	-2.29	68.20	Peak
2	5650.000	43.53	20.76	64.29	-3.91	68.20	Peak
3	5700.000	53.44	20.92	74.36	-30.84	105.20	Peak
4	5720.000	67.42	20.98	88.40	-22.40	110.80	Peak
5	5725.000	68.65	21.00	89.65	-32.55	122.20	Peak
6	5746.913	95.61	21.07	116.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz	Test Voltage	120V/60Hz

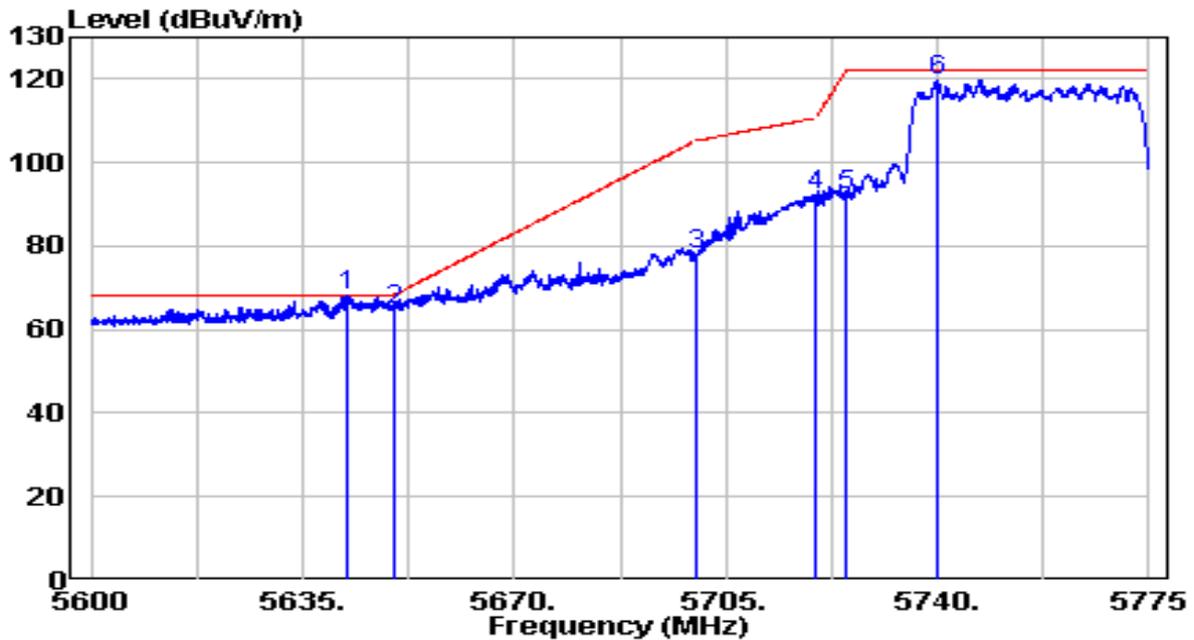


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5642.438	47.27	20.73	68.01	-0.19	68.20	Peak
2	5650.000	44.12	20.76	64.88	-3.32	68.20	Peak
3	5700.000	57.23	20.92	78.14	-27.06	105.20	Peak
4	5720.000	71.36	20.98	92.35	-18.45	110.80	Peak
5	5725.000	71.38	21.00	92.37	-29.83	122.20	Peak
6	5740.087	98.80	21.05	119.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz	Test Voltage	120V/60Hz

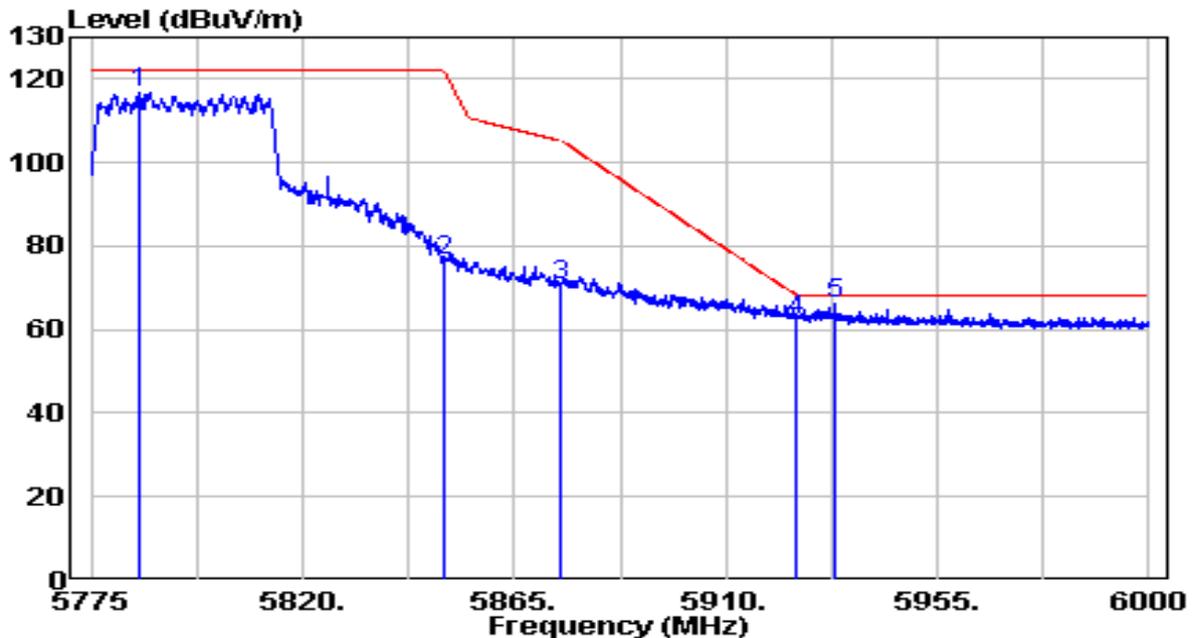


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5785.237	95.76	21.19	116.96	N/A	N/A	Peak
2	5850.000	54.94	21.40	76.34	-45.86	122.20	Peak
3	5875.000	49.20	21.49	70.68	-34.52	105.20	Peak
4	5925.000	40.69	21.65	62.34	-5.86	68.20	Peak
5 *	5933.288	44.58	21.67	66.25	-1.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz	Test Voltage	120V/60Hz

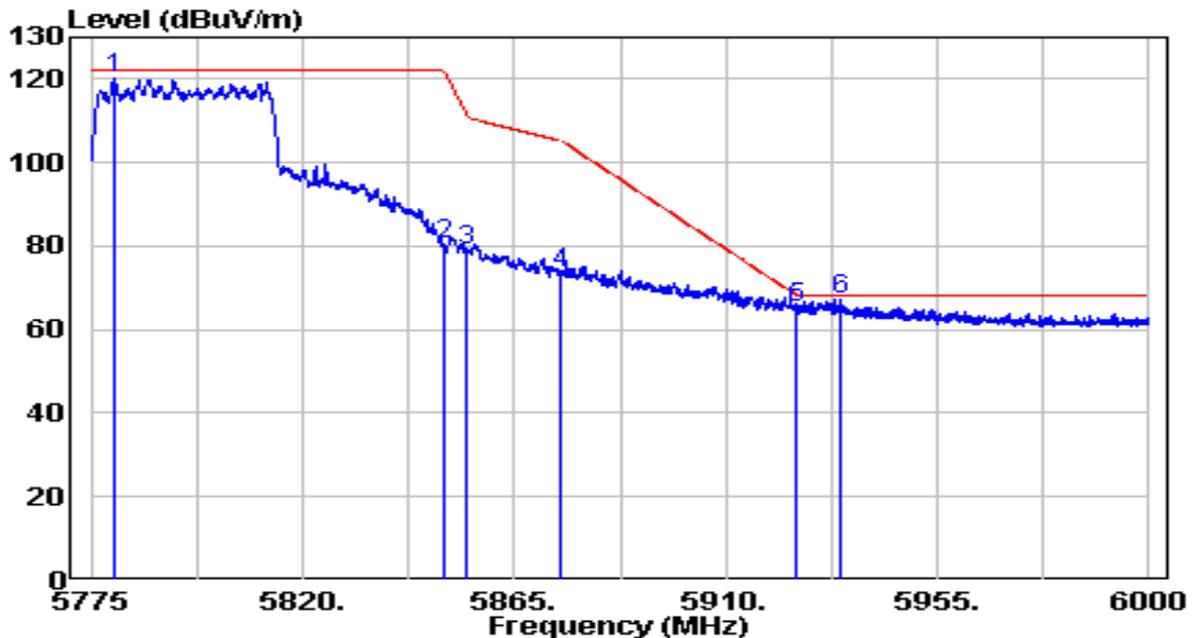


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5779.950	99.24	21.18	120.42	N/A	N/A	Peak
2	5850.000	58.80	21.40	80.21	-41.99	122.20	Peak
3	5855.000	57.44	21.42	78.86	-31.94	110.80	Peak
4	5875.000	51.98	21.49	73.47	-31.73	105.20	Peak
5	5924.962	43.38	21.65	65.02	-3.20	68.23	Peak
6	* 5934.638	45.36	21.68	67.03	-1.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	120V/60Hz

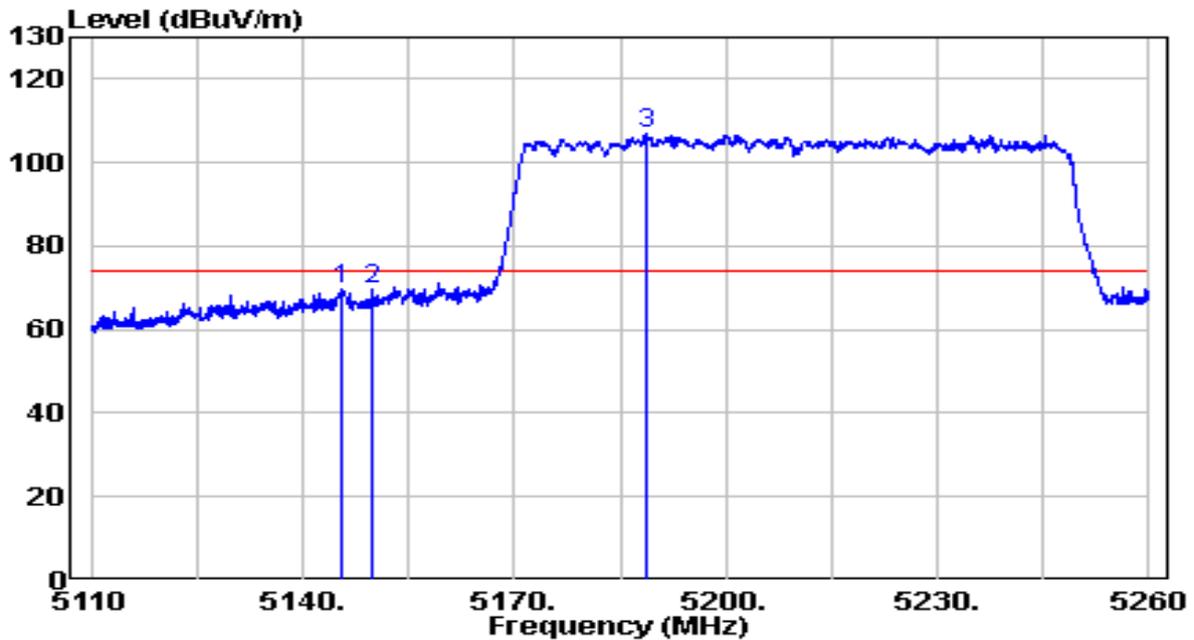


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5145.700	49.72	19.90	69.62	-4.38	74.00	Peak
2	5150.000	49.53	19.91	69.43	-4.57	74.00	Peak
3	* 5188.675	86.99	19.95	106.93	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	120V/60Hz

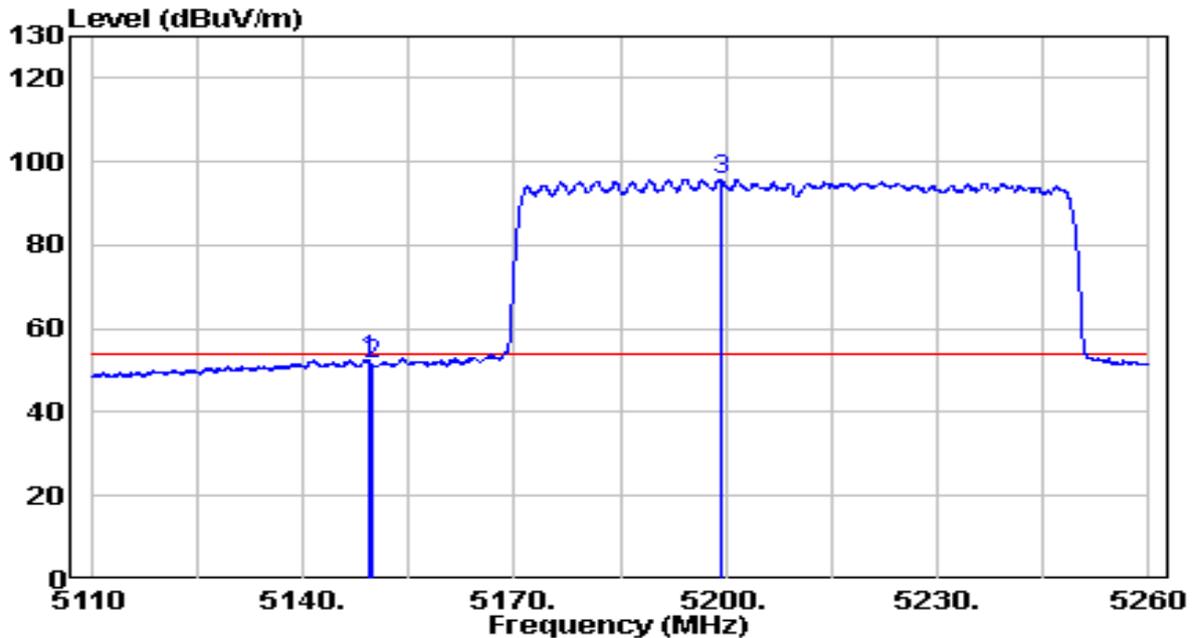


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.300	32.68	19.91	52.58	-1.42	54.00	Average
2	5150.000	31.68	19.91	51.59	-2.41	54.00	Average
3	* 5199.250	75.91	19.96	95.87	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	120V/60Hz

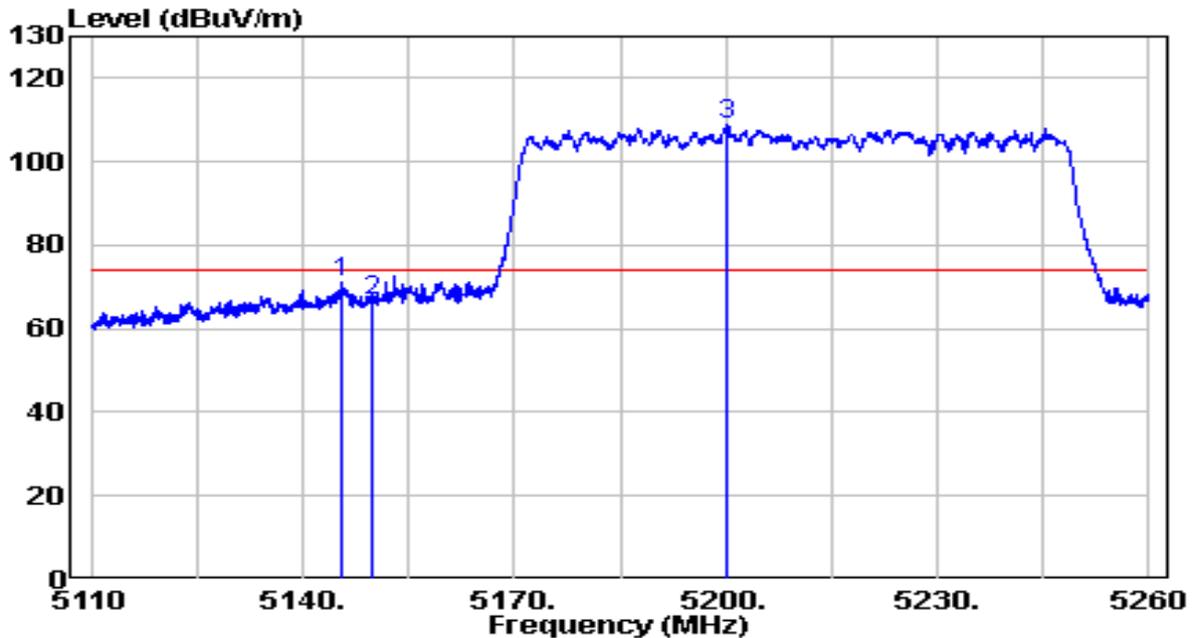


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.550	51.09	19.90	70.99	-3.01	74.00	Peak
2	5150.000	46.71	19.91	66.62	-7.38	74.00	Peak
3	* 5200.150	88.91	19.96	108.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	120V/60Hz

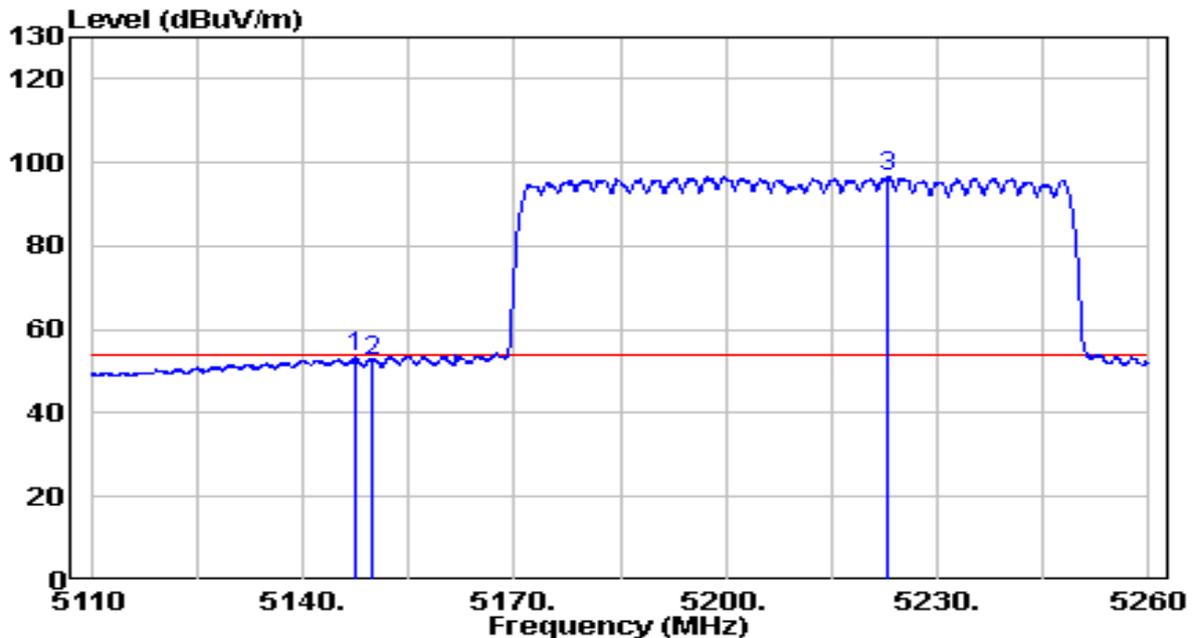


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.425	33.34	19.90	53.24	-0.76	54.00	Average
2	5150.000	32.69	19.91	52.60	-1.40	54.00	Average
3	* 5223.100	76.80	19.98	96.78	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz	Test Voltage	120V/60Hz

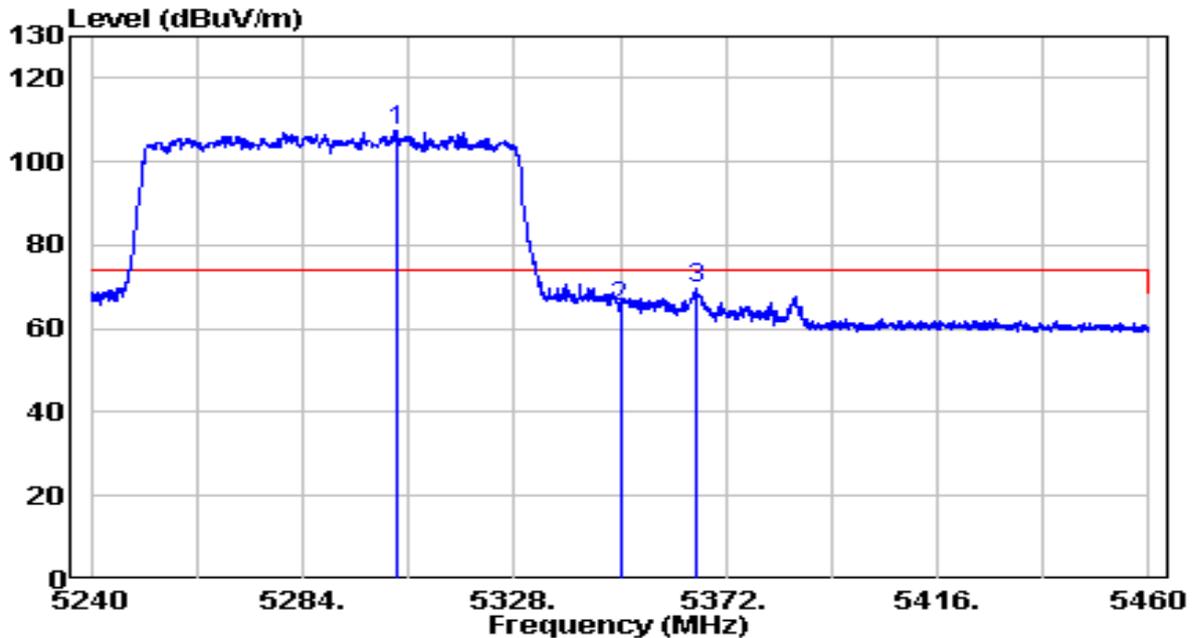


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5303.690	87.56	20.07	107.63	N/A	N/A	Peak
2	5350.000	45.29	20.11	65.40	-8.60	74.00	Peak
3	5365.620	49.43	20.13	69.56	-4.44	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz	Test Voltage	120V/60Hz

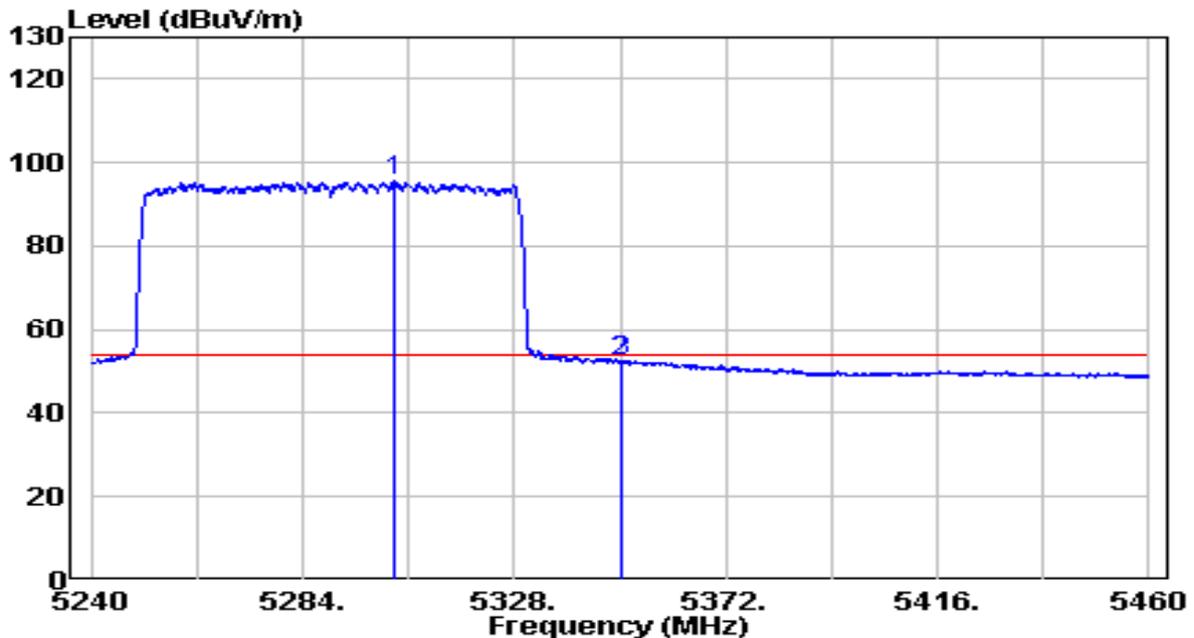


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5303.250	75.77	20.07	95.83	N/A	N/A	Average
2	5350.000	32.23	20.11	52.34	-1.66	54.00	Average
3	5350.440	32.53	20.11	52.65	-1.35	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MH	Test Voltage	120V/60Hz

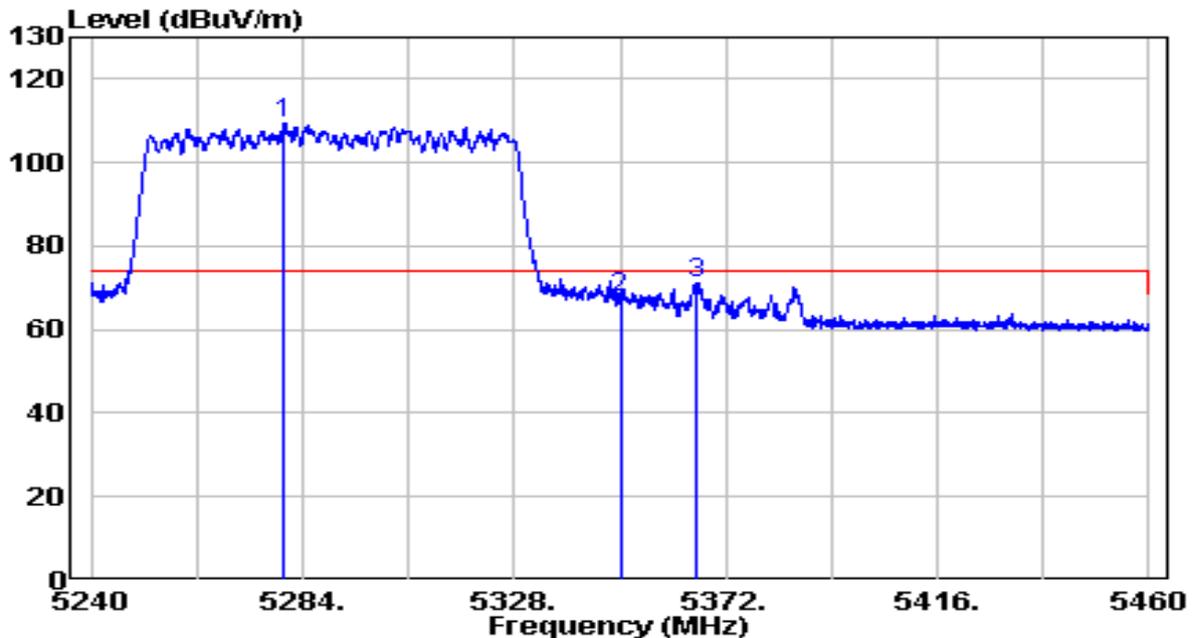


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5280.150	89.58	20.04	109.62	N/A	N/A	Peak
2	5350.000	47.37	20.11	67.49	-6.51	74.00	Peak
3	5365.840	50.97	20.13	71.10	-2.90	74.00	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz	Test Voltage	120V/60Hz

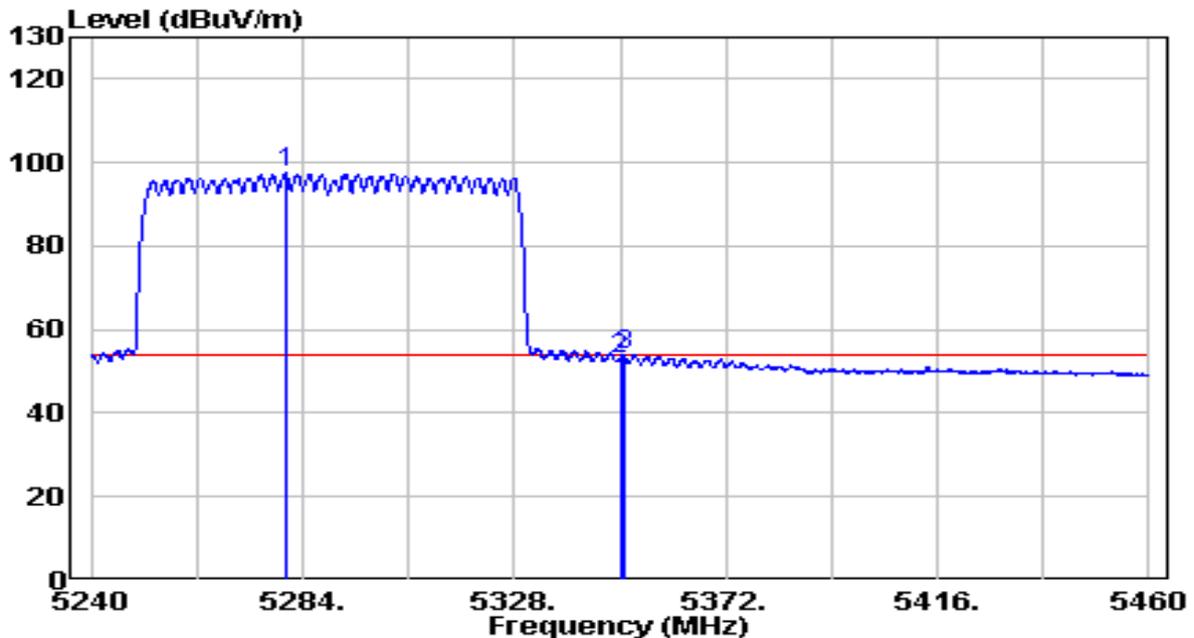


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5280.370	77.39	20.04	97.43	N/A	N/A	Average
2	5350.000	32.80	20.11	52.92	-1.08	54.00	Average
3	5350.770	33.77	20.11	53.88	-0.12	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	120V/60Hz

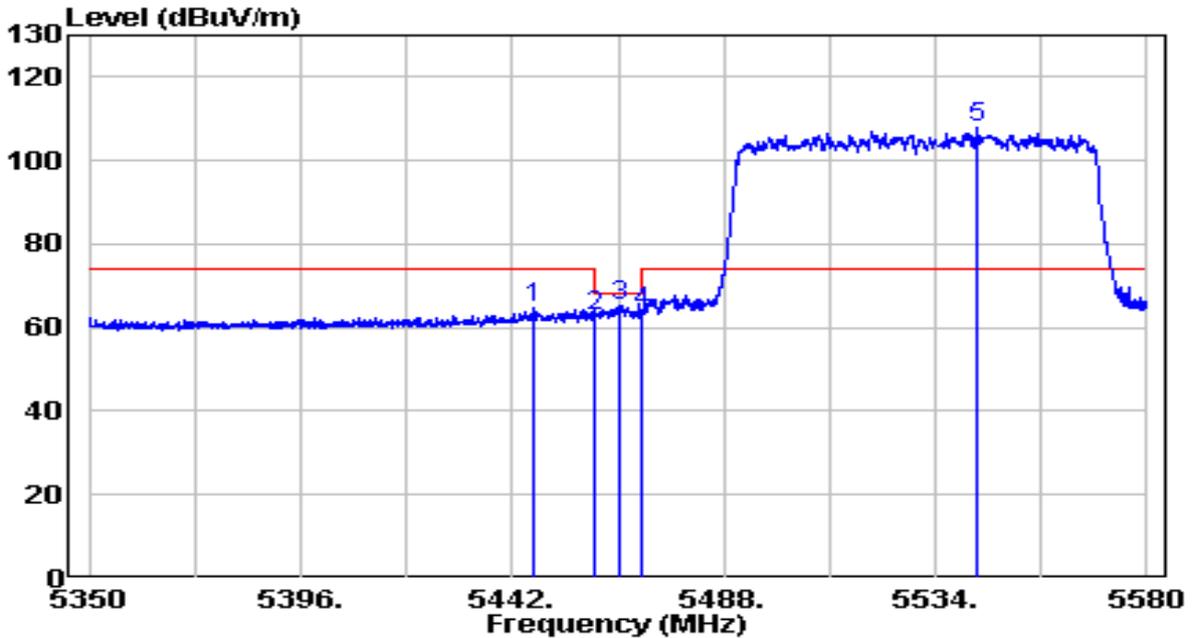


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5446.485	44.49	20.21	64.70	-9.30	74.00	Peak
2	5460.055	42.78	20.23	63.00	-5.20	68.20	Peak
3	5465.230	45.20	20.23	65.43	-2.77	68.20	Peak
4	5470.000	43.51	20.24	63.75	-4.45	68.20	Peak
5 *	5543.085	87.30	20.41	107.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	120V/60Hz

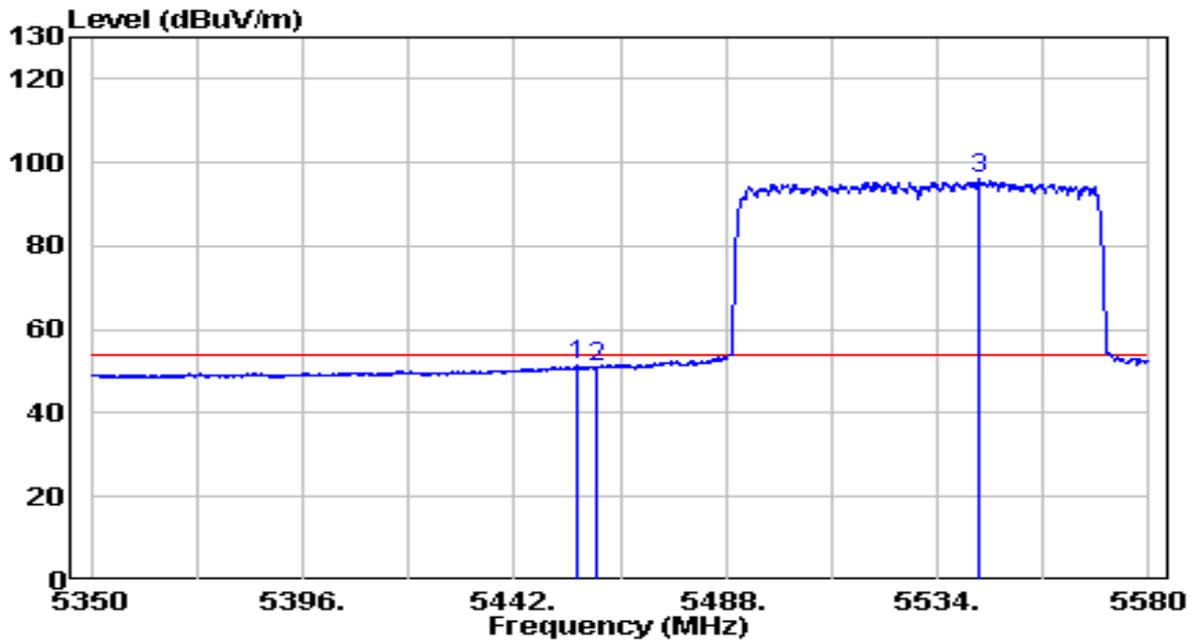


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.570	31.05	20.22	51.28	-2.72	54.00	Average
2	5460.000	30.91	20.23	51.14	-2.86	54.00	Average
3	* 5542.970	75.62	20.41	96.03	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	120V/60Hz

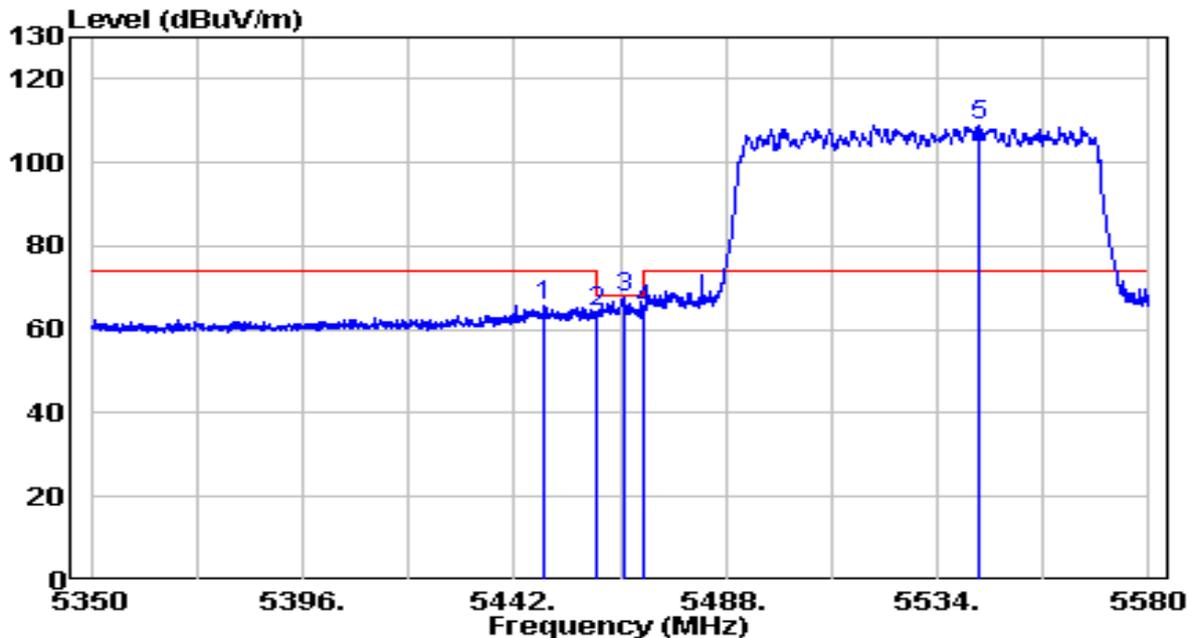


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5448.325	45.48	20.22	65.70	-8.30	74.00	Peak
2	5460.000	44.05	20.23	64.27	-3.93	68.20	Peak
3	5466.035	47.69	20.23	67.93	-0.27	68.20	Peak
4	5470.000	44.74	20.24	64.98	-3.22	68.20	Peak
5 *	5542.970	88.69	20.41	109.10	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	120V/60Hz

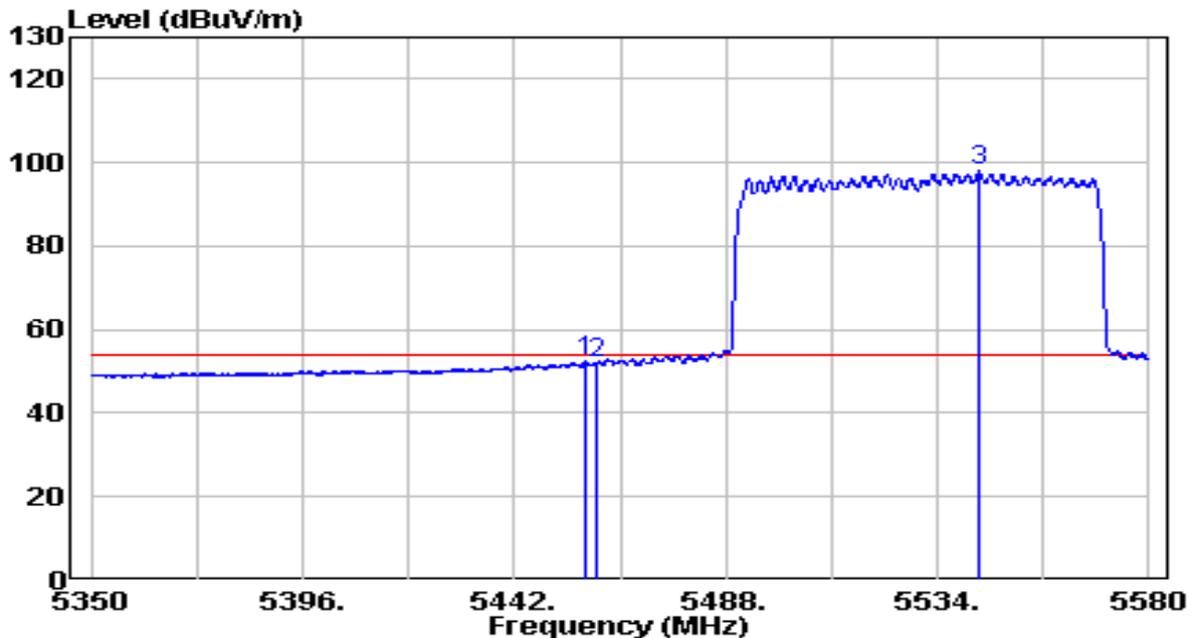


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.525	32.21	20.23	52.43	-1.57	54.00	Average
2	5460.000	32.00	20.23	52.23	-1.77	54.00	Average
3	* 5543.085	77.55	20.41	97.96	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz	Test Voltage	120V/60Hz

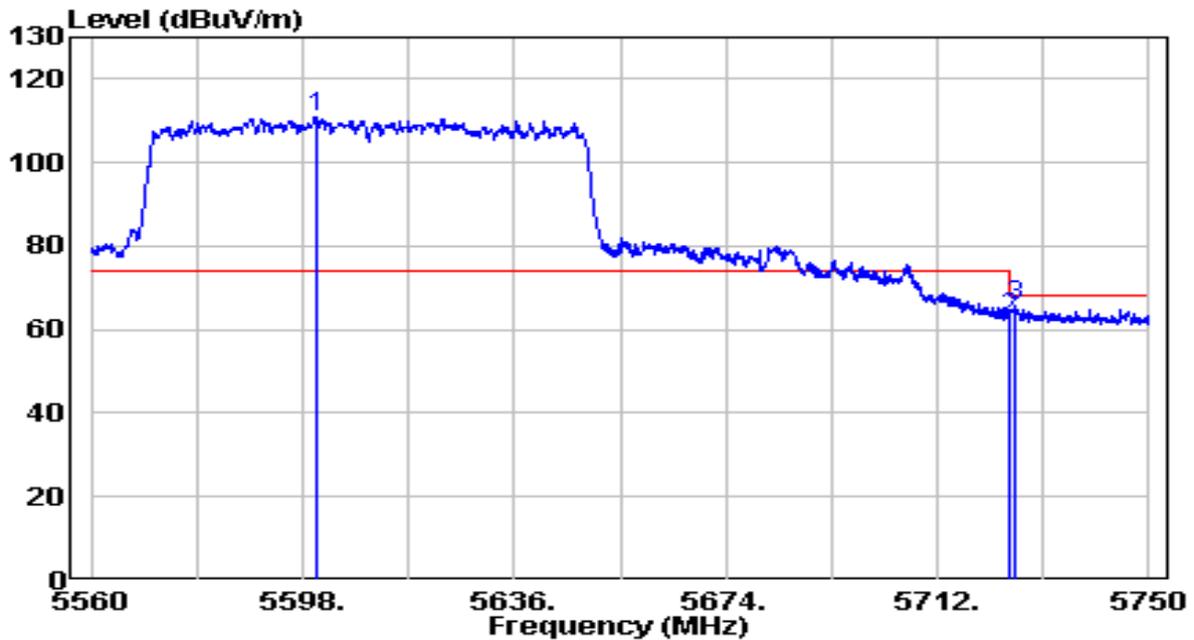


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5600.280	90.35	20.59	110.95	N/A	N/A	Peak
2	5725.000	41.60	21.00	62.60	-5.60	68.20	Peak
3	5725.870	44.70	21.00	65.70	-2.50	68.20	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-03-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/20.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz	Test Voltage	120V/60Hz

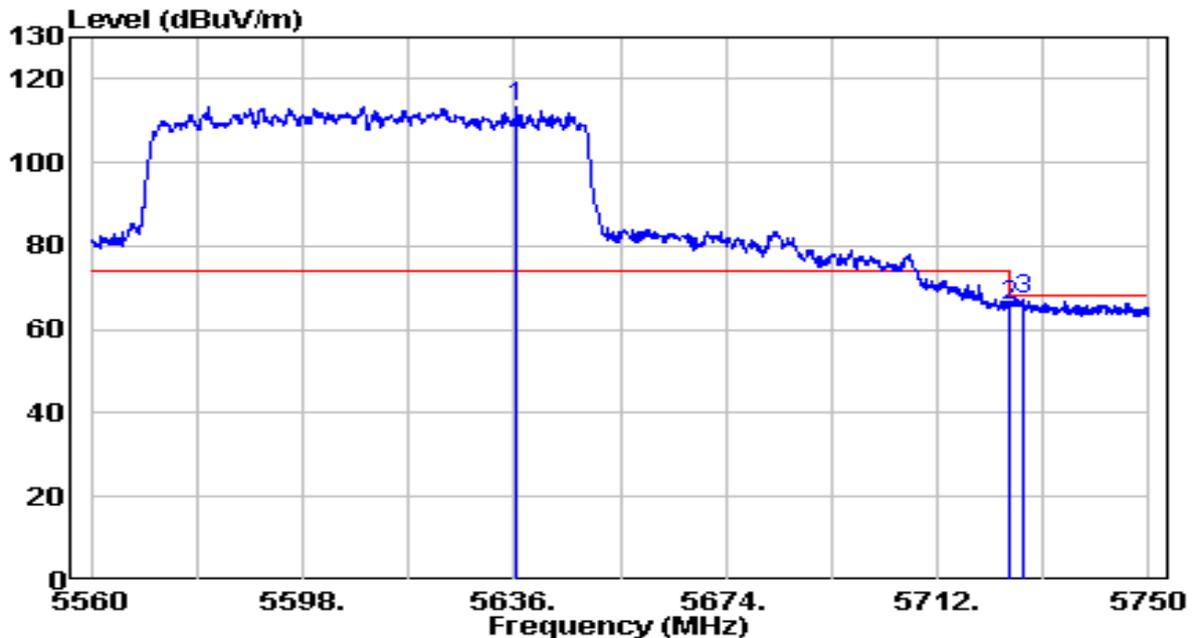


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	92.67	20.71	113.38	N/A	N/A	Peak
2		44.56	21.00	65.56	-2.64	68.20	Peak
3		46.25	21.01	67.26	-0.94	68.20	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

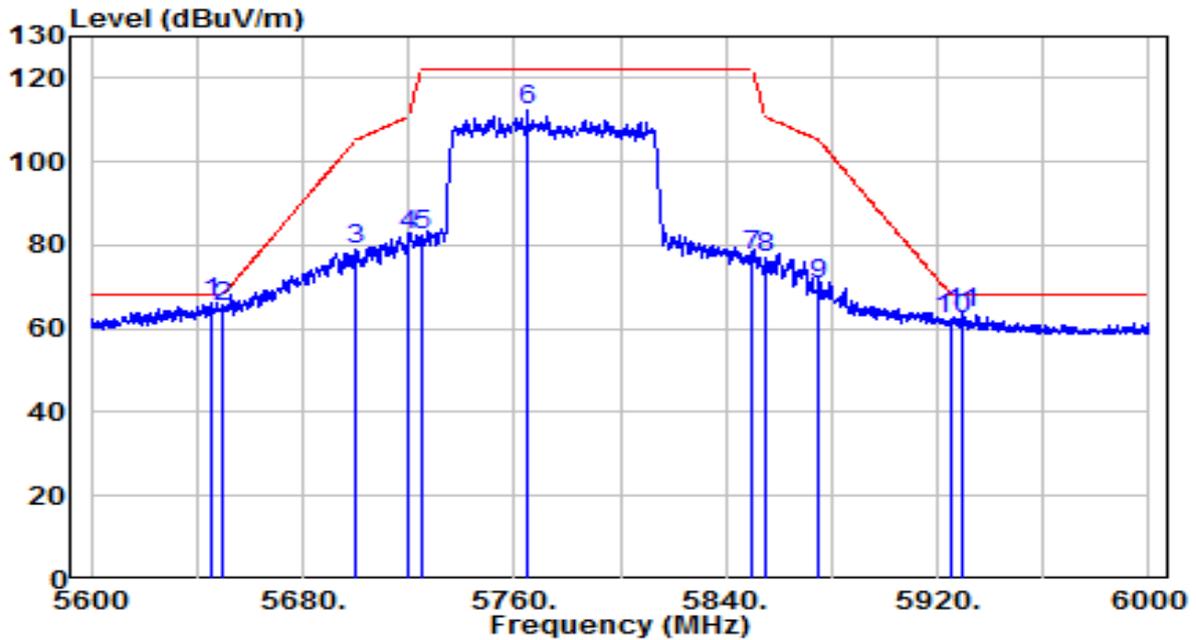


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5645.600	45.70	20.74	66.44	-1.76	68.20	Peak
2	5650.000	44.53	20.76	65.28	-2.92	68.20	Peak
3	5700.000	58.28	20.92	79.20	-26.00	105.20	Peak
4	5720.000	61.43	20.98	82.41	-28.39	110.80	Peak
5	5725.000	61.25	21.00	82.25	-39.95	122.20	Peak
6	5764.600	91.08	21.13	112.21	N/A	N/A	Peak
7	5850.000	56.15	21.40	77.55	-44.65	122.20	Peak
8	5855.000	55.53	21.42	76.95	-33.85	110.80	Peak
9	5875.000	49.20	21.49	70.69	-34.51	105.20	Peak
10	5925.000	40.78	21.65	62.43	-5.77	68.20	Peak
11	5929.400	42.04	21.66	63.71	-4.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-06-09
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.8°C/49%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

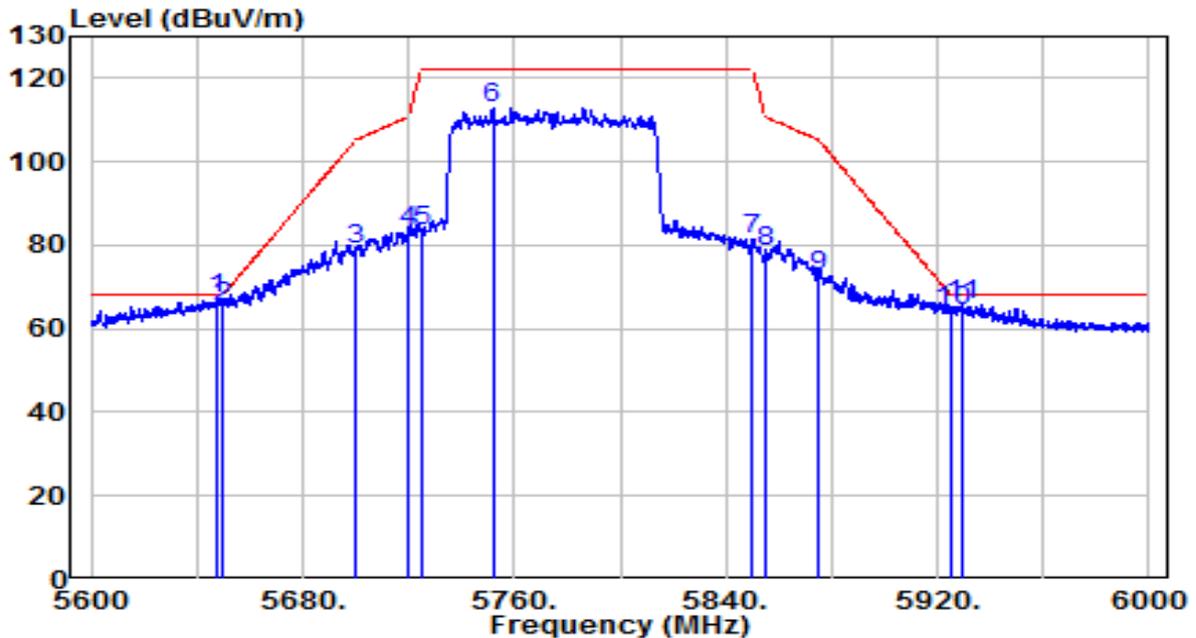

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5647.600	46.69	20.75	67.44	-0.76	68.20	Peak
2	5650.000	44.44	20.76	65.20	-3.00	68.20	Peak
3	5700.000	58.19	20.92	79.11	-26.09	105.20	Peak
4	5720.000	62.65	20.98	83.63	-27.17	110.80	Peak
5	5725.000	62.42	21.00	83.42	-38.78	122.20	Peak
6	5751.800	91.67	21.09	112.76	N/A	N/A	Peak
7	5850.000	59.88	21.40	81.29	-40.91	122.20	Peak
8	5855.000	57.23	21.42	78.65	-32.15	110.80	Peak
9	5875.000	50.94	21.49	72.42	-32.78	105.20	Peak
10	5925.000	42.82	21.65	64.47	-3.73	68.20	Peak
11	5929.400	44.31	21.66	65.97	-2.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)- Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

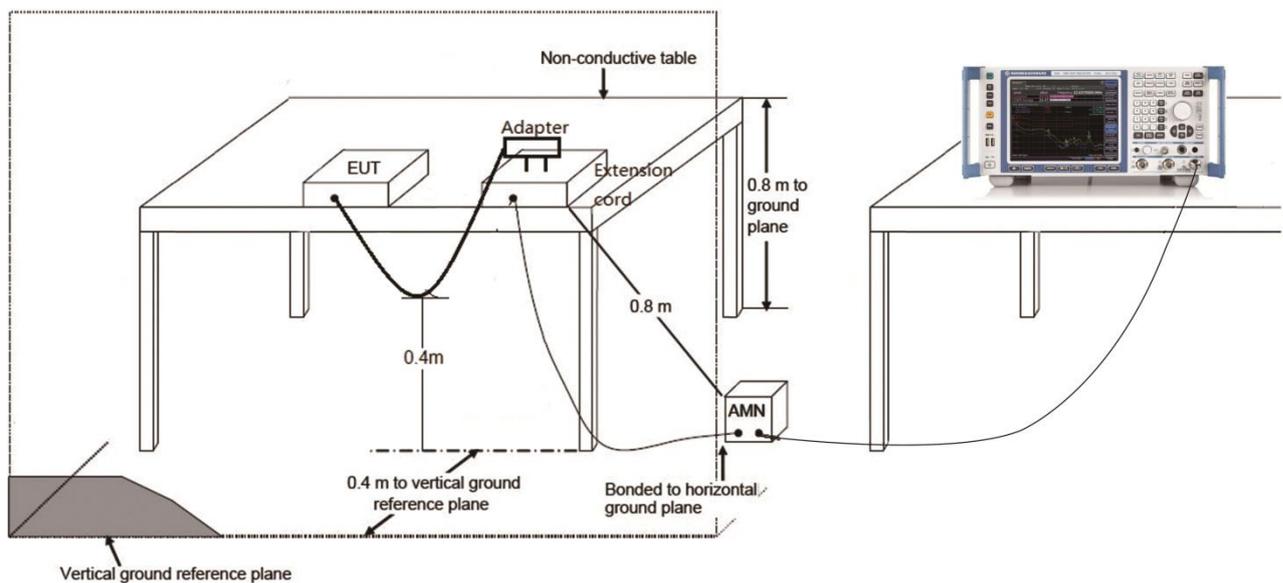

7.10.3. Test Result

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-17
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.4°C /52.4%
Polarity	Line1	Site / Test Engineer	SR2 /Eric Lin
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	120V/60Hz

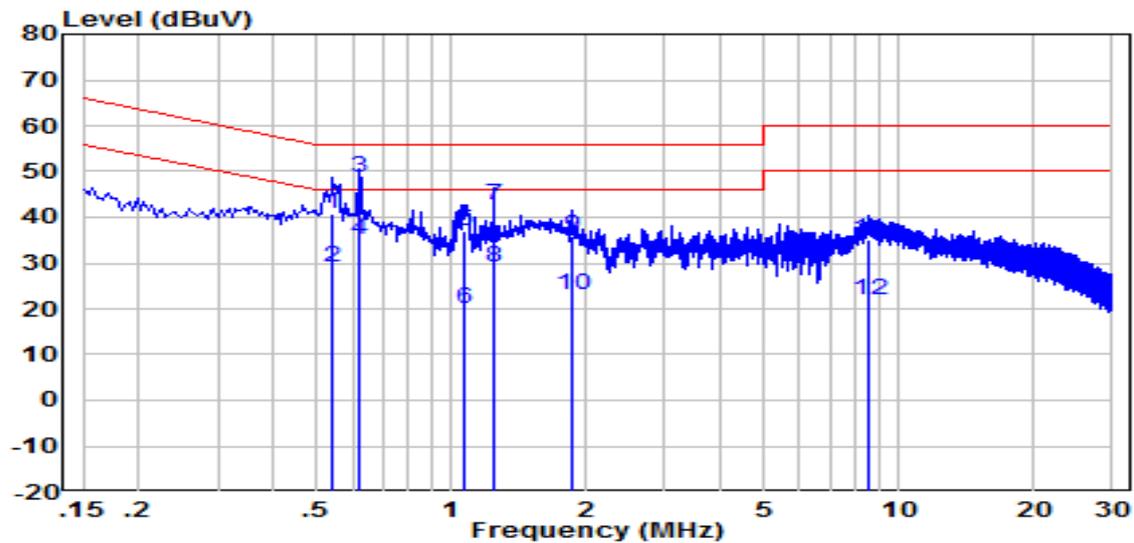


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.542	31.05	9.65	40.70	-15.30	56.00	Quasi-Peak
2	0.542	19.55	9.65	29.20	-16.80	46.00	Average
3	0.622	39.06	9.66	48.72	-7.28	56.00	Quasi-Peak
4	0.622	25.36	9.66	35.02	-10.98	46.00	Average
5	1.070	27.35	9.70	37.05	-18.95	56.00	Quasi-Peak
6	1.070	10.45	9.70	20.15	-25.85	46.00	Average
7	1.240	32.85	9.70	42.55	-13.45	56.00	Quasi-Peak
8	1.240	19.25	9.70	28.95	-17.05	46.00	Average
9	1.870	26.04	9.72	35.76	-20.24	56.00	Quasi-Peak
10	1.870	13.34	9.72	23.06	-22.94	46.00	Average
11	8.540	25.04	9.87	34.91	-25.09	60.00	Quasi-Peak
12	8.540	12.04	9.87	21.91	-28.09	50.00	Average

Note:

1. " **", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX1500 Wi-Fi 6 Range Extender	Date of Test	2021-05-17
-----	-------------------------------	--------------	------------

Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.4°C /52.4%
Polarity	Neutral	Site / Test Engineer	SR2 /Eric Lin
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	120V/60Hz

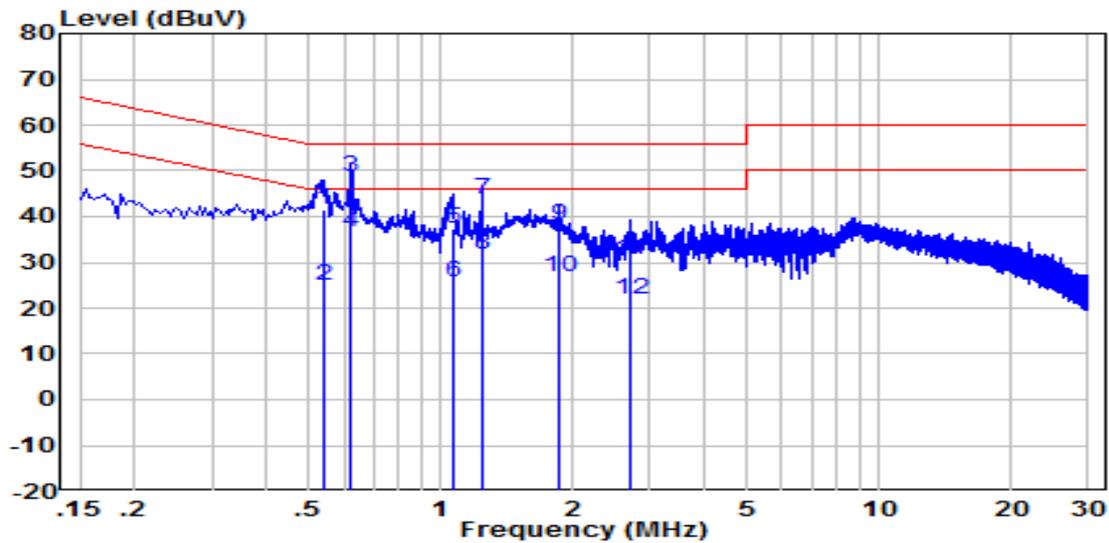

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.538	31.83	9.66	41.49	-14.51	56.00	Quasi-Peak
2	0.538	15.23	9.66	24.89	-21.11	46.00	Average
3	* 0.622	39.14	9.67	48.81	-7.19	56.00	Quasi-Peak
4	0.622	27.04	9.67	36.71	-9.29	46.00	Average
5	1.070	27.83	9.71	37.54	-18.46	56.00	Quasi-Peak
6	1.070	16.03	9.71	25.74	-20.26	46.00	Average
7	1.240	34.13	9.71	43.84	-12.16	56.00	Quasi-Peak
8	1.240	21.93	9.71	31.64	-14.36	46.00	Average
9	1.860	28.24	9.72	37.96	-18.04	56.00	Quasi-Peak
10	1.860	17.14	9.72	26.86	-19.14	46.00	Average
11	2.710	20.85	9.74	30.58	-25.42	56.00	Quasi-Peak
12	2.710	12.05	9.74	21.78	-34.22	56.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15E of the FCC Rules.

_____ The End _____

Appendix A - Test Setup Photograph

Refer to “2012TW0007-Setup Photograph” file.

Appendix B - External Photograph

Refer to "2012TW0007-Internal Photo" file.

Appendix C - Internal Photograph

Refer to "2012TW0007-Internal Photo" file.