



RADIO EXPOSURE TEST REPORT

IC : 2AXJ4X50

Equipment : AX3000 Whole Home Mesh Wi-Fi 6 System
AX1800 Whole Home Mesh Wi-Fi 6 System

Brand Name : tp-link

Model Name : Deco W6000 、 Deco X60 、 Deco X25 、 Deco X20


Applicant : TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

Manufacturer : TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

Standard : RSS-102 Issue 5

The product was received on Jul. 13, 2021, and testing was started from Jan. 05, 2022 and completed on Jan. 11, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in RSS-102 Issue 5 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

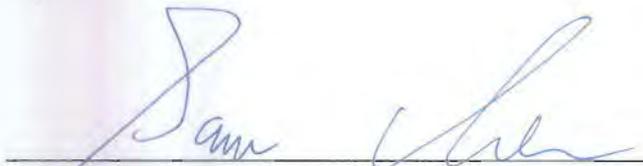

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	5
1.3 Table for Multiple Listing	6
1.4 Table for EUT Supports Functions.....	6
1.5 Table for Permissive Change.....	7
1.6 Accessories	7
1.7 Testing Location	7
2 Maximum Permissible Exposure	8
2.1 Limit of Maximum Permissible Exposure	8
2.2 MPE Calculation Method.....	8
2.3 Calculated Result and Limit.....	9

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Viola Huang**



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5150-5250 5250-5350 5725-5850	5180-5250 5250-5320 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)

1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	2	tp-link	3101502756	Dipole Antenna	I-PEX	1.93	0.9
2	1	tp-link	3101502757	Dipole Antenna	I-PEX	1.94	0.97

Note: The above information was declared by manufacturer.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ax mode (2TX, 2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz Function>

For IEEE 802.11a/n/ac/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.



1.3 Table for Multiple Listing

EUT	Equipment Name	Model Name	LAN Port	WLAN Function	The color of the top cover on the EUT
1	AX3000 Whole Home Mesh Wi-Fi 6 System	Deco W6000	2	2.4GHz + 5GHz UNII 1 /	White
-		Deco X60	2	UNII 2A (160M) / UNII 3	White
2	AX1800 Whole Home Mesh Wi-Fi 6 System	Deco X25	2	2.4GHz + 5GHz	Black
-		Deco X20	2	UNII 1 / UNII 3	White

Note 1: From the above models, model: Deco W6000 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.4 Table for EUT Supports Functions

Function
AP Router
Mesh



1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FA171316.

Below is the table for the change of the product with respect to the original one.

Modifications					Performance Checking
1. Add 4 models "Deco W6000、Deco X60、Deco X25、Deco X20".					There's no influence on this test report.
The difference with the original model Deco X50 is below:					
Equipment Name	Model Name	LAN Port	WLAN Function	The color of the top cover on the EUT	
AX3000 Whole Home Mesh Wi-Fi 6 System	Deco X50	3	2.4GHz + 5GHz UNII 1 / UNII 2A (160M) / UNII 3	White	
	Deco W6000	2		White	
	Deco X60	2		White	
AX1800 Whole Home Mesh Wi-Fi 6 System	Deco X25	2	2.4GHz + 5GHz UNII 1 / UNII 3	Black	
	Deco X20	2		White	

Note: RF Exposure Evaluation of 5GHz UNII 1, UNII 2A, UNII 3 and 2.4GHz Band are based on original test report

1.6 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	tp-link	T120150-2B4	Input: 100-240V~50/60Hz, 0.6A Output: 12V, 1.5A

1.7 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For WLAN 2.4GHz + WLAN 5GHz (UNII 1 / UNII 2A (160M) / UNII 3)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	1.94	29.15	31.09	0.50	31.59	1.44212	20	0.28689	1.00000
5.2G;D1D	0.97	26.19	27.16	0.50	27.66	0.58345	20	0.11607	1.00000
5.2G;D1D _160M	0.97	20.80	21.77	0.50	22.27	0.16866	20	0.03355	1.00000
5.3G;D1D _160M	0.97	20.95	21.92	0.50	22.42	0.17458	20	0.03473	1.00000
5.8G;D1D	0.97	26.45	27.42	0.50	27.92	0.61944	20	0.12323	1.00000

For WLAN 2.4GHz + WLAN 5GHz (5GHz UNII 1 / UNII 3)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	1.94	29.15	31.09	0.50	31.59	1.44212	20	0.28689	1.00000
5.2G;D1D	0.97	26.19	27.16	0.50	27.66	0.58345	20	0.11607	1.00000
5.8G;D1D	0.97	26.45	27.42	0.50	27.92	0.61944	20	0.12323	1.00000

Simultaneous Transmission Analysis

Mode 1: EUT 1-WLAN 2.4GHz + WLAN 5GHz (UNII 1 + UNII 2A (160M) + UNII 3)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
2.4G;D1D	1.94	29.15	31.09	0.50	31.59	1.44212	20	0.28689	1.00000	0.28689
5.2G;D1D	0.97	26.19	27.16	0.50	27.66	0.58345	20	0.11607	1.00000	0.11607
5.3G;D1D _160M	0.97	20.95	21.92	0.50	22.42	0.17458	20	0.03473	1.00000	0.03473
5.8G;D1D	0.97	26.45	27.42	0.50	27.92	0.61944	20	0.12323	1.00000	0.12323
									Sum Ratio	0.56092
									Ratio Limit	1



Mode 2: EUT 2-WLAN 2.4GHz + WLAN 5GHz (5GHz UNII 1 + UNII 3)

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
2.4G;D1D	1.94	29.15	31.09	0.50	31.59	1.44212	20	0.28689	1.00000	0.28689
5.2G;D1D	0.97	26.19	27.16	0.50	27.66	0.58345	20	0.11607	1.00000	0.11607
5.8G;D1D	0.97	26.45	27.42	0.50	27.92	0.61944	20	0.12323	1.00000	0.12323
									Sum Ratio	0.52619
									Ratio Limit	1

Note: The above antenna gain was declared by manufacturer.

————THE END————