

Tonal

REVISED TEST REPORT TO 110285-51

Apollo Board
Model: 500-0806

Trainer
Model: T2

Tested to The Following Standards:

FCC Part 15 Subpart E Section(s)

15.207 & 15.407
(NII 5250 – 5350 MHz)

Report No.: 110285-51A

Date of issue: December 24, 2024



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

Test Certificate # 803.01

This report contains a total of 139 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Revision History	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5250-5350 MHz)	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test (EUT)	6
General Product Information:	7
FCC Part 15 Subpart E	10
15.215 Occupied Bandwidth	10
15.407(a) Output Power	32
15.407(a) Power Spectral Density	54
15.407(b) Radiated Emissions & Band Edge	75
15.207 AC Conducted Emissions	128
APPENDIX A: Modifications Made During Testing	137
Supplemental Information	138
Measurement Uncertainty	138
Emissions Test Details	138

Administrative Information

Test Report Information

REPORT PREPARED FOR:

Tonal
69 Converse, Suite 200
San Francisco, CA 94103

Representative: Lars Gilstrom
Customer Reference Number: PO3196

REPORT PREPARED BY:

Lisa Bevington
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 110285

DATE OF EQUIPMENT RECEIPT:

October 2, 2024

DATE(S) OF TESTING:

October 7, 8, 9, 17, 24, and 25, 2024
And November 1 and 6, 2024

Revision History

Original: Testing of Apollo Board, Model: 500-0806 & Trainer, Model: T2, to FCC Part 15 Subpart E Sections 15.207 & 15.407 (NII 5250 - 5350 MHz).

Revision A: 15.407(a), updated note on page 34.

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable, and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

Summary of Results

Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5250-5350 MHz)

Test Procedure	Description	Modifications	Results
15.215	Occupied Bandwidth	NA	Pass
15.407(a)	Output Power	NA	Pass
15.407(a)	Power Spectral Density	NA	Pass
15.407(b)	Radiated Emissions & Band Edge	Mod. #1	Pass
15.407(g)	Frequency Stability	NA	NA1
15.207	AC Conducted Emissions	Mod. #1	Pass

NA = Not Applicable

NA1 = In accordance with KDB 789033, this test is not required.

ISO/IEC 17025 Decision Rule

The equipment sample utilized for testing is selected by the manufacturer. The declaration of pass or fail herein is a binary statement for simple acceptance rule (ILAC G8) based upon assessment to the specification(s) listed above, without consideration of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

Modification #1: Added a ferrite (Wurth: 742 712 21) on lower resistor wire.
 Green Resistor.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

Worst case tested:
 802.11a 18Mbit/s
 802.11n HT20 MSC2
 802.11n HT40 MSC0
 802.11ac VHT20 MSC2
 802.11ac VHT40 MSC0
 802.11ac VHT80 MSC1

Equipment Under Test (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration A

Equipment Under Test (= EUT):*

Device Name	Manufacturer	Model #	S/N
Apollo Board	Tonal	500-0806	080600030001263

Support Devices:

Device Name	Manufacturer	Model #	S/N
MCB Board	Tonal Systems	500-0131	500-0131_rev003_00001286_20240909_17
Laptop	Dell	XPS	22E00911
AC/DC Adapter for Laptop	Dell	DA130PM130	CN-06TTY6-48661-4CO-27M7-A00

Configuration 1

Equipment Under Test (= EUT):*

Device Name	Manufacturer	Model #	S/N
Trainer	Tonal	T2	4000055


Support Devices:

Device Name	Manufacturer	Model #	S/N
Laptop	Dell	XPS	22E00911
AC/DC Adapter for Laptop	Dell	DA130PM130	CN-06TTY6-48661-4CO-27M7-A00

General Product Information:

Description of EUT	
Exercise Trainer	
Product Information	Manufacturer-Provided Details
Operating Frequencies Tested:	5260MHz-5320MHz
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	802.11
Maximum Duty Cycle:	100%
Modulation Type(s):	802.11a (BPSK, QPSK, 16QAM, 64QAM) 802.11n HT20 (BPSK, QPSK, 16QAM, 64QAM) 802.11n HT40 (BPSK, QPSK, 16QAM, 64QAM) 802.11ac VHT20 (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ac VHT40 (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ac VHT80 (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Number of TX Chains:	2 Note: The manufacturer declared MIMO is not enabled, completely uncorrelated transmission.
Beamforming Type:	NA
Antenna Type(s) and Gain:	External/4.66dBi
Antenna Connection Type:	External Connector
Nominal Input Voltage:	12VDC
Firmware / Software Version(s):	QRCT (Qualcomm Radio Control Toolkit) Version 4.1
Firmware / Software Description:	Using C-Prompt and QRCT application to control all modulation types and frequencies to continuously transmit or receive as intended
Firmware / Software Setting(s):	NA
Tune-up or Adjustment(s):	NA
Declared Operation Use Case:	<input type="checkbox"/> Indoor Access Point <input type="checkbox"/> Outdoor Access Point <input checked="" type="checkbox"/> Indoor Client <input type="checkbox"/> Outdoor Client <input type="checkbox"/> Outdoor Fixed Equipment
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

EUT and Accessory Photo(s)

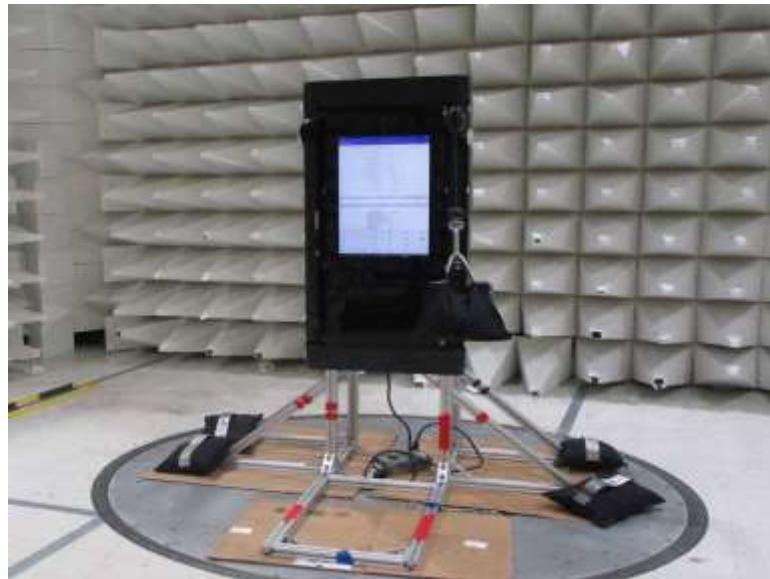


Support Equipment Photo(s)




Block Diagram of Test Setup(s)

Config#	Setup Description of Block Diagram
1 & A	<p>Radiated Measurement: The antenna is set up at 3meter distance from the EUT according to ANSI C63.10 2020. The EUT is set up and operated as intended.</p> <p>Conducted Measurement: The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.</p>

Radiated Method Setup

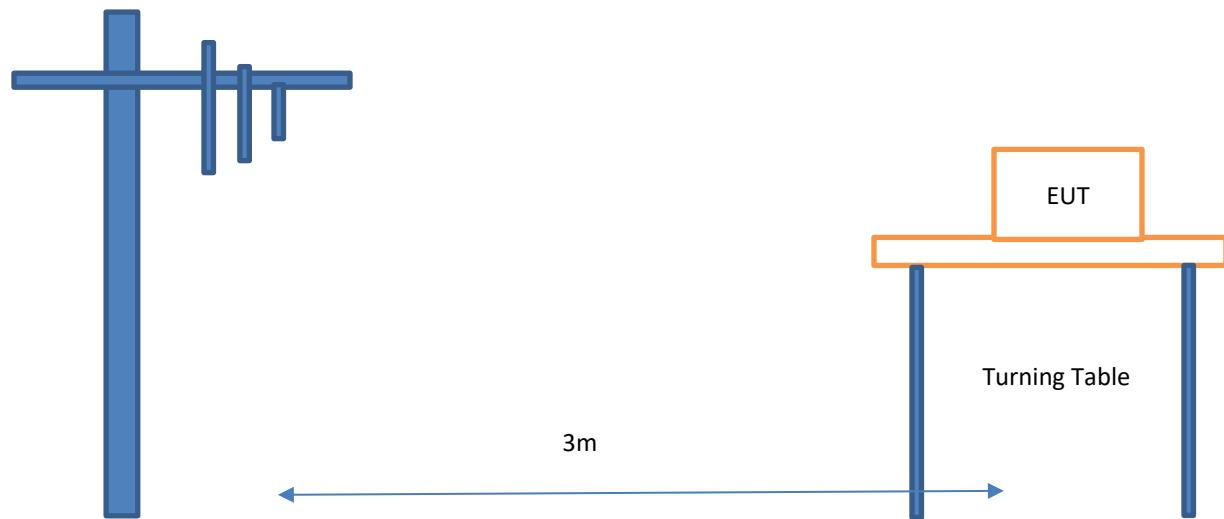

Conducted Method Setup

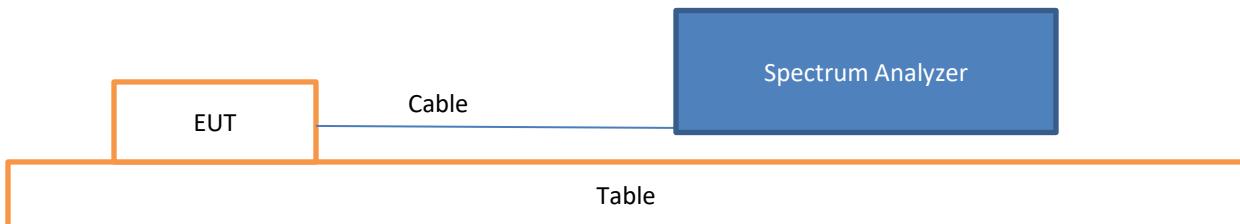

FCC Part 15 Subpart E

15.215 Occupied Bandwidth

Test Setup/Conditions			
Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions			
Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026

26dB Occupied Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	0	802.11a	20642	None	N/A
5300	0	802.11a	20839		
5320	0	802.11a	21143		
5260	0	802.11n HT20	21424		
5300	0	802.11n HT20	21580		
5320	0	802.11n HT20	22230		
5260	0	802.11ac 20MHz	21499		
5300	0	802.11ac 20MHz	21313		
5320	0	802.11ac 20MHz	21691		
5270	0	802.11n HT40	41581		
5310	0	802.11n HT40	41644		
5270	0	802.11ac 40MHz	41646		
5310	0	802.11ac 40MHz	41285		
5290	0	802.11ac 80MHz	83691		

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	1	802.11a	20437	None	N/A
5300	1	802.11a	20528		
5320	1	802.11a	20574		
5260	1	802.11n HT20	21169		
5300	1	802.11n HT20	21306		
5320	1	802.11n HT20	21117		
5260	1	802.11ac 20MHz	21390		
5300	1	802.11ac 20MHz	20881		
5320	1	802.11ac 20MHz	20976		
5270	1	802.11n HT40	41205		
5310	1	802.11n HT40	41321		
5270	1	802.11ac 40MHz	40797		
5310	1	802.11ac 40MHz	41554		
5290	1	802.11ac 80MHz	83405		


99% Occupied Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	0	802.11a	16460.9	None	N/A
5300	0	802.11a	16469.6		
5320	0	802.11a	16471.4		
5260	0	802.11n HT20	17676.2		
5300	0	802.11n HT20	17680.9		
5320	0	802.11n HT20	17679.8		
5260	0	802.11ac 20MHz	17669.9		
5300	0	802.11ac 20MHz	17679.0		
5320	0	802.11ac 20MHz	17678.2		
5270	0	802.11n HT40	36191.4		
5310	0	802.11n HT40	36226.1		
5270	0	802.11ac 40MHz	36205.9		
5310	0	802.11ac 40MHz	36211.9		
5290	0	802.11ac 80MHz	75610.2		


Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	1	802.11a	16455.6	None	N/A
5300	1	802.11a	16485.0		
5320	1	802.11a	16458.1		
5260	1	802.11n HT20	17674.5		
5300	1	802.11n HT20	17682.1		
5320	1	802.11n HT20	17665.8		
5260	1	802.11ac 20MHz	17665.9		
5300	1	802.11ac 20MHz	17662.5		
5320	1	802.11ac 20MHz	17656.0		
5270	1	802.11n HT40	36179.0		
5310	1	802.11n HT40	36225.8		
5270	1	802.11ac 40MHz	36156.7		
5310	1	802.11ac 40MHz	36215.9		
5290	1	802.11ac 80MHz	75647.3		

Plot(s)


Chain 0 802.11a

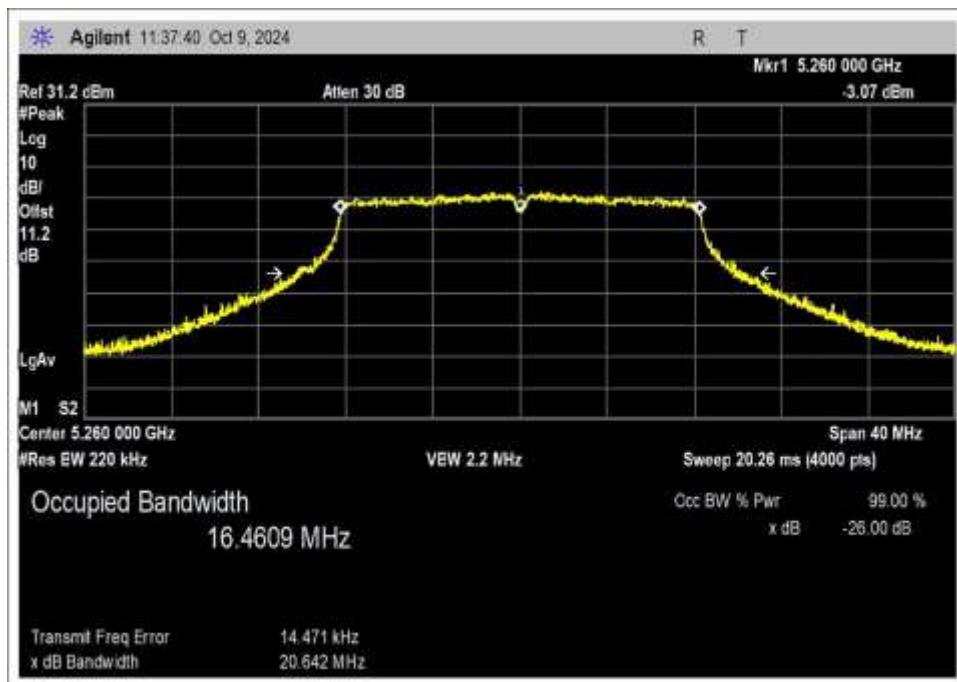


Low Channel

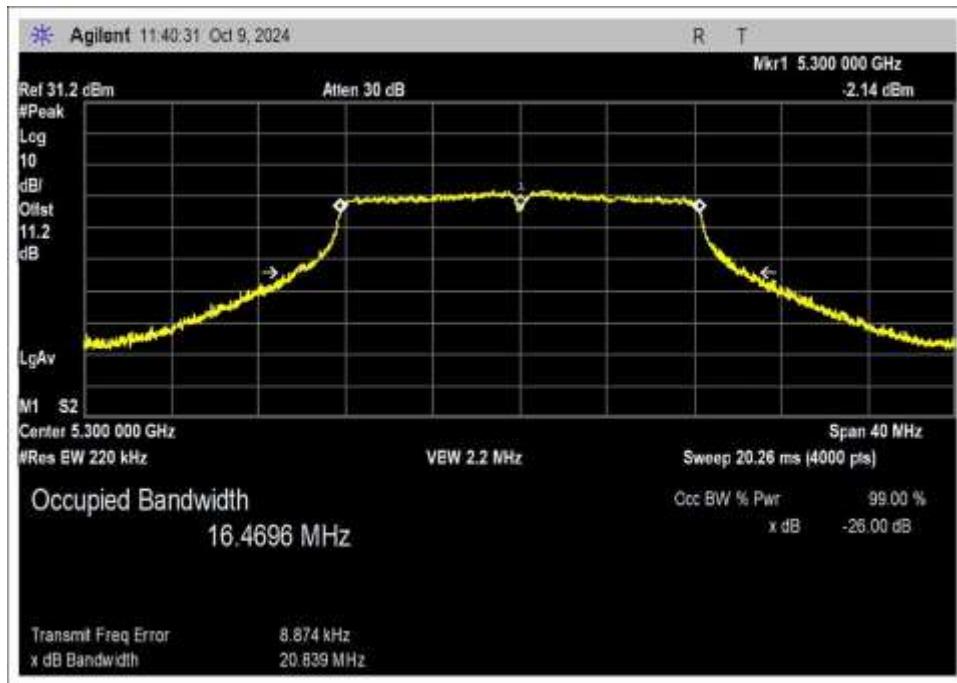


Middle Channel

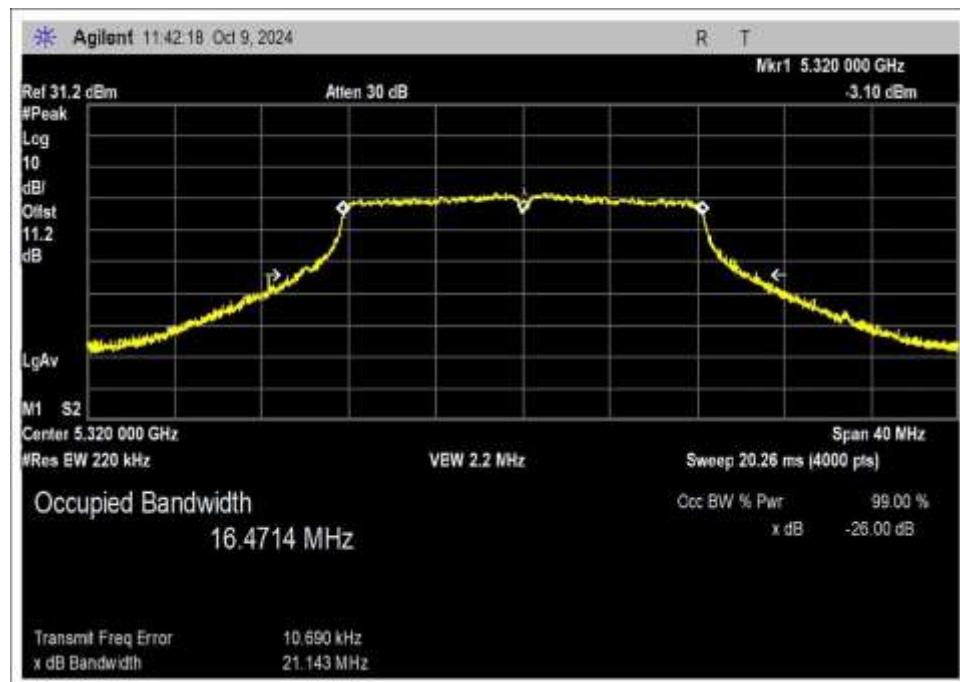


High Channel

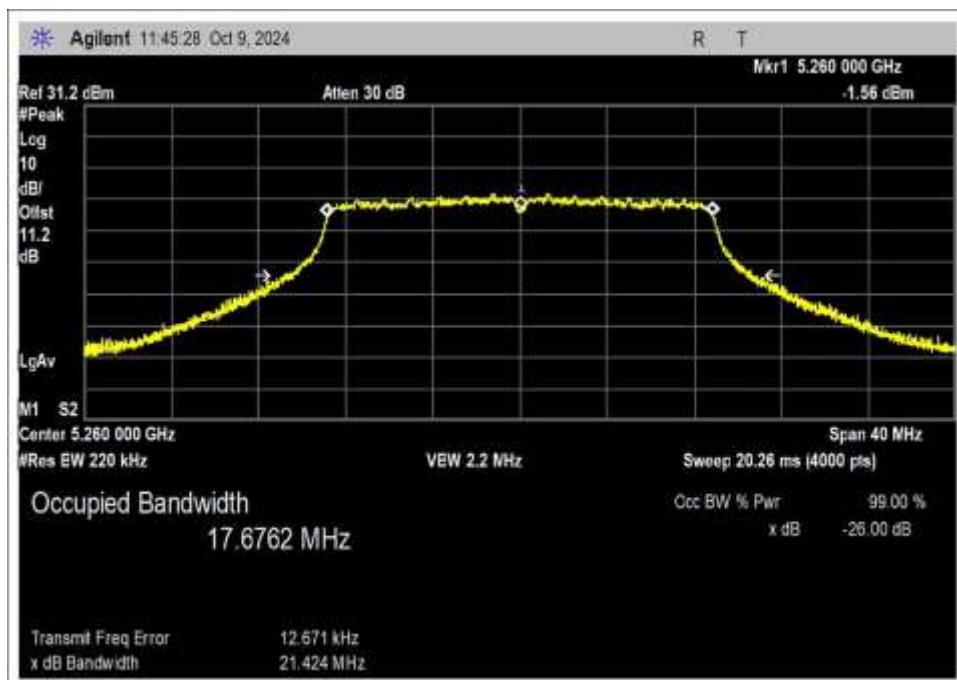802.11n HT20


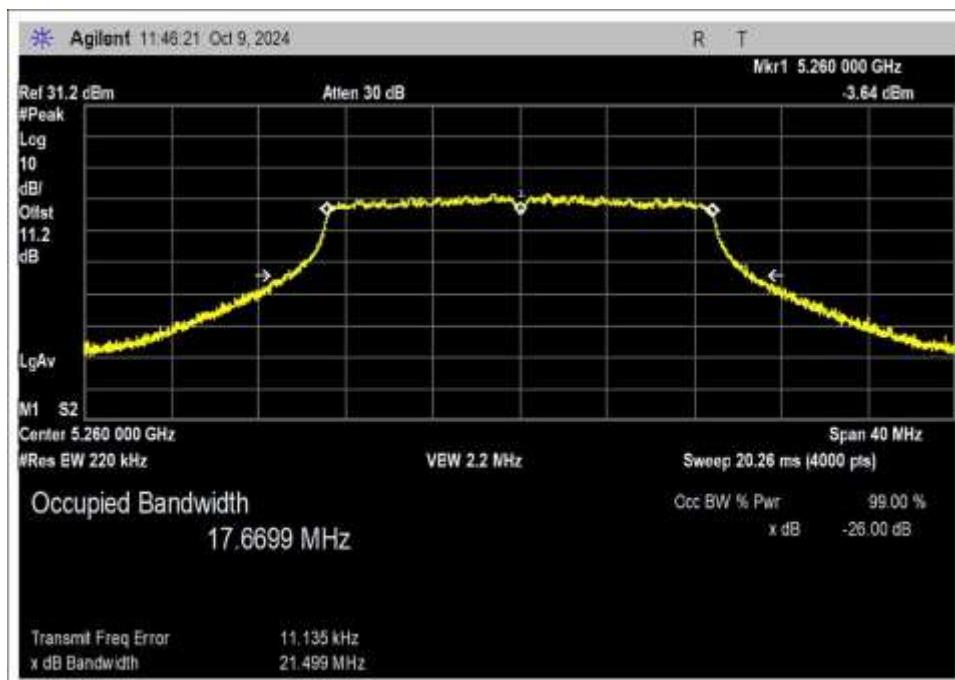
Low Channel

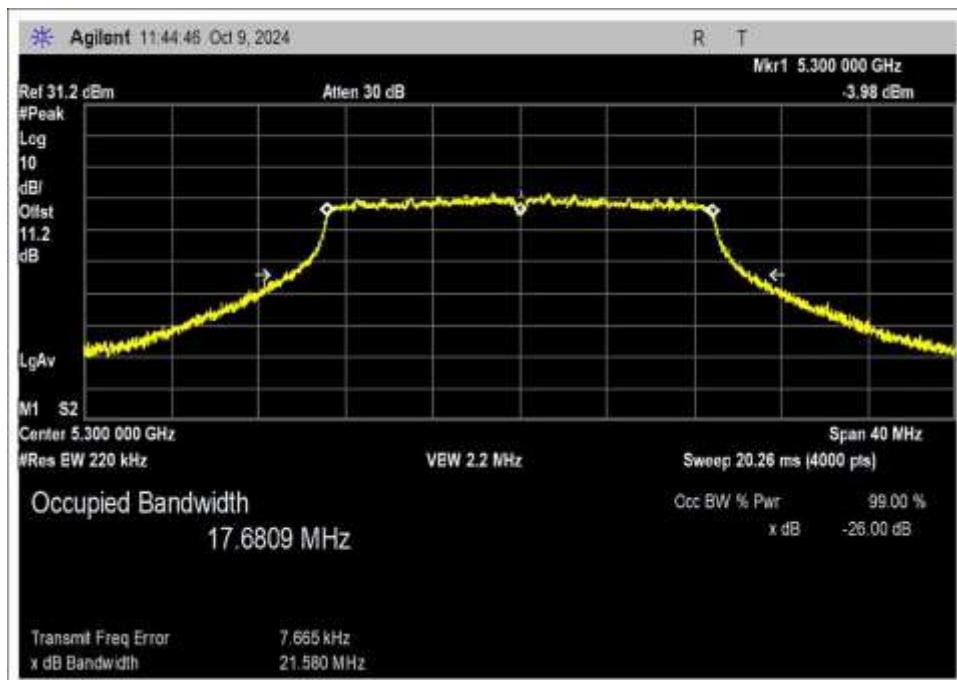


Middle Channel

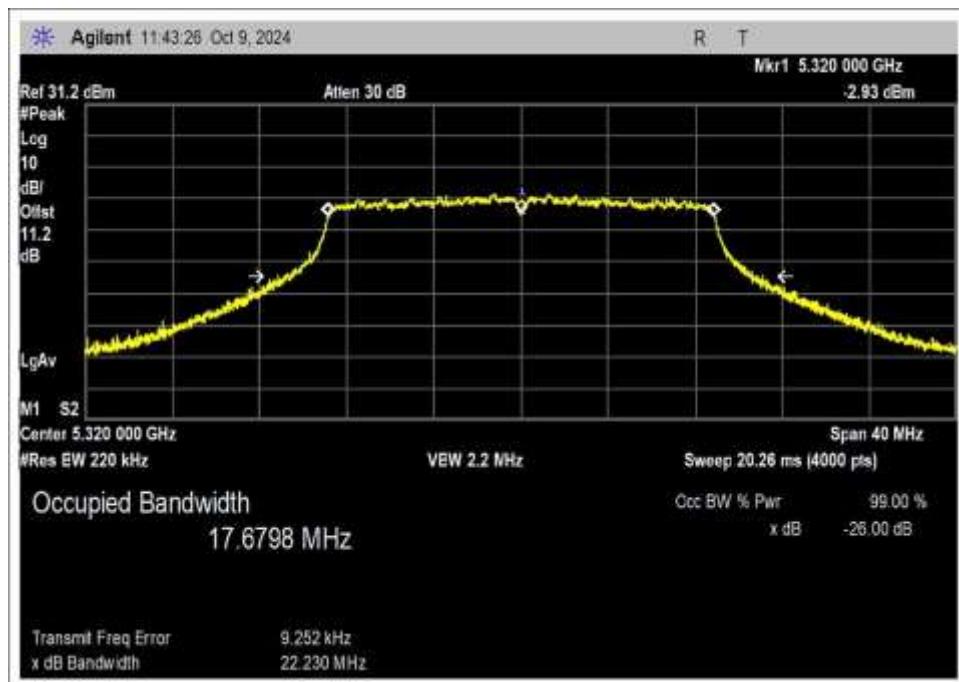


High Channel

802.11ac 20MHz


Low Channel

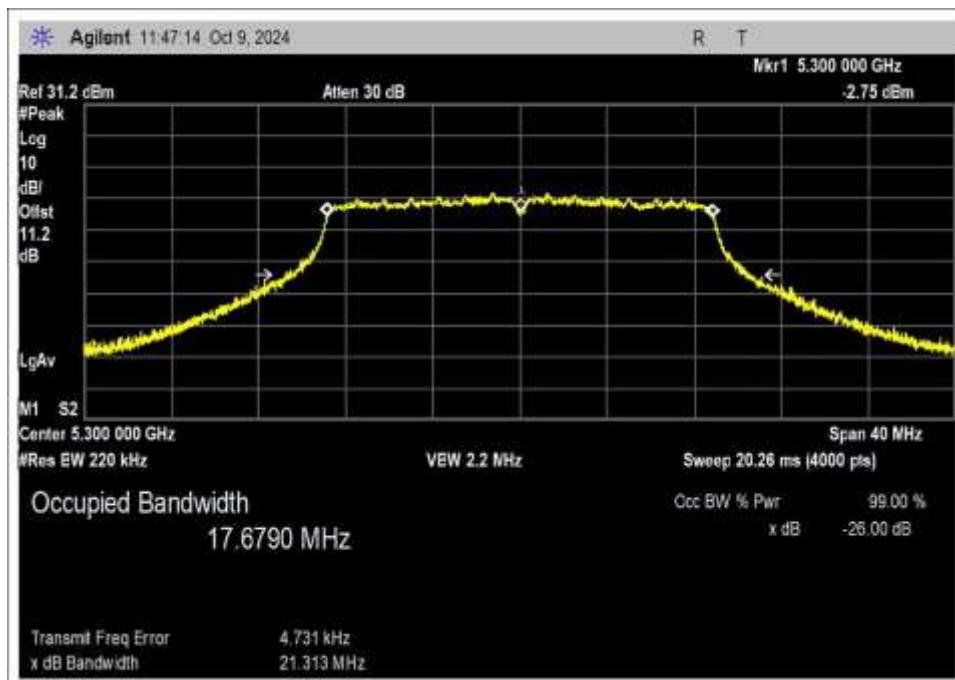


Middle Channel

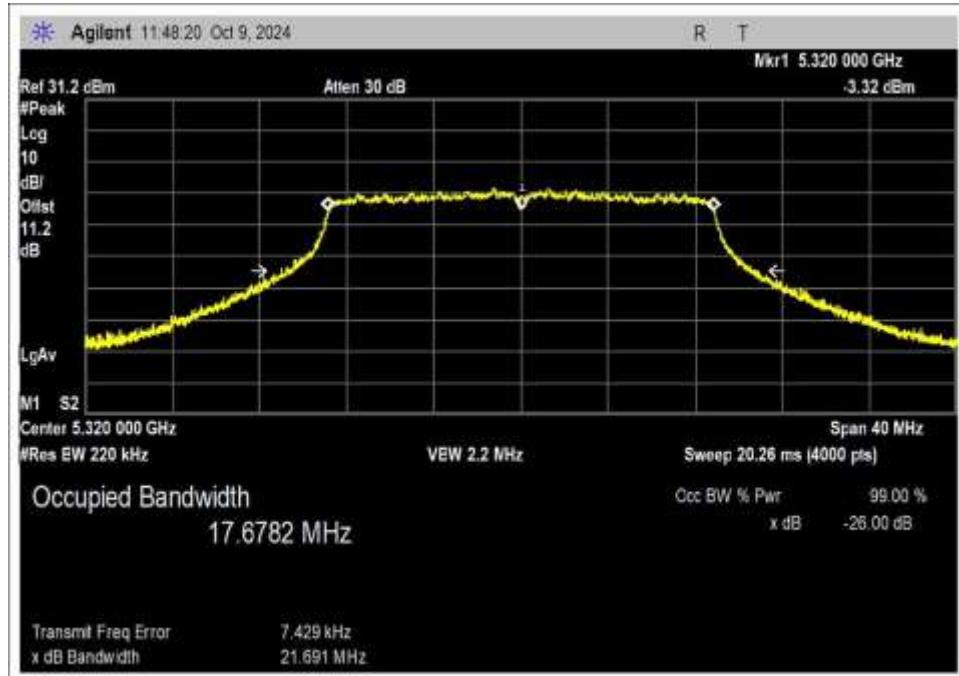


High Channel


802.11 n HT40

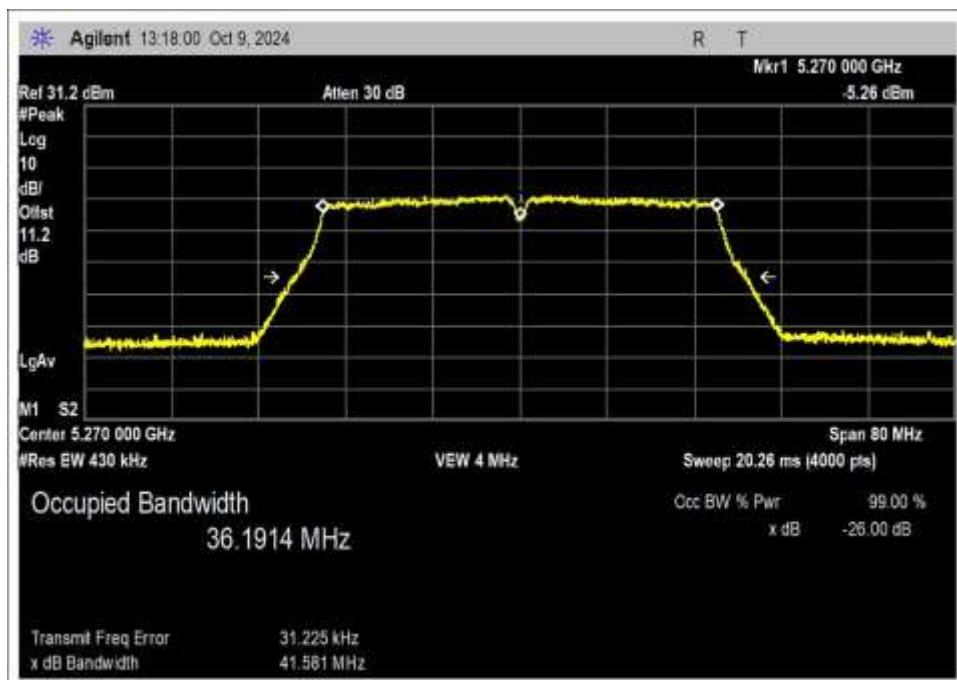


Low Channel

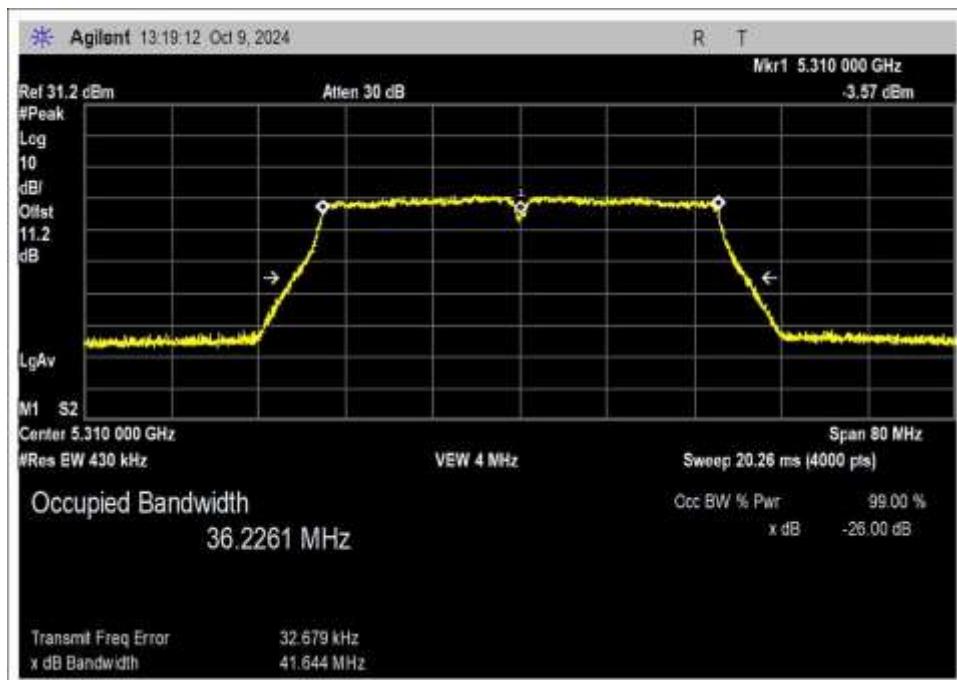

High Channel

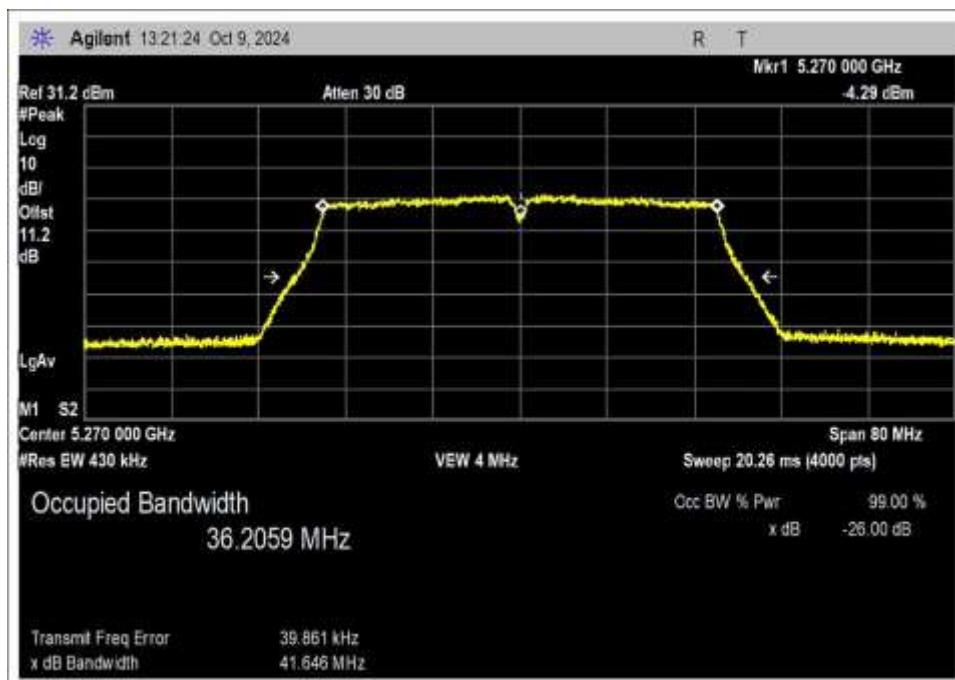
802.11ac 40MHz


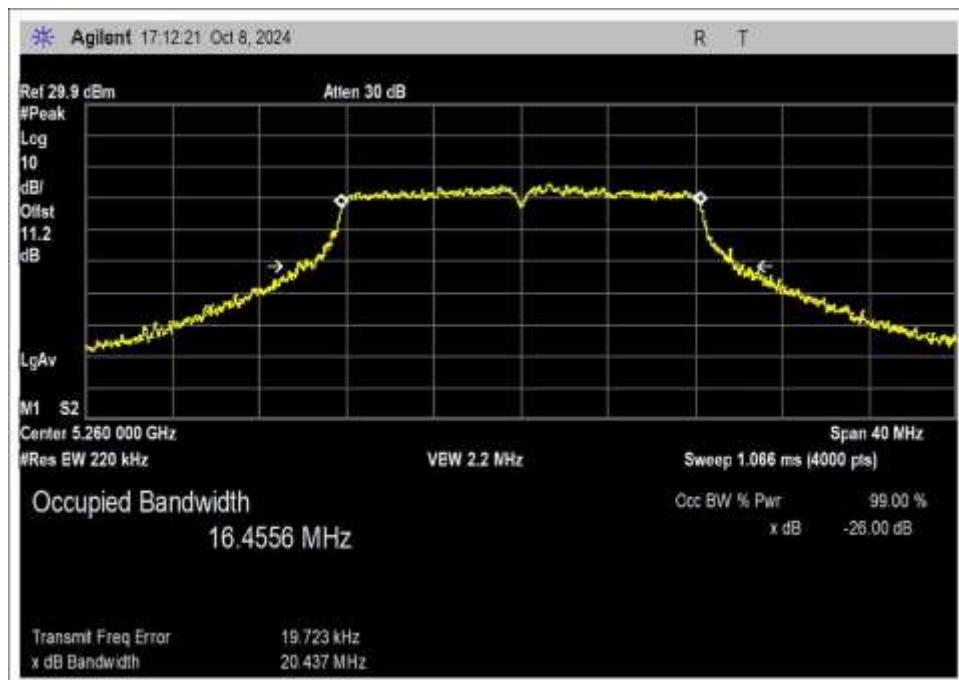
Low Channel

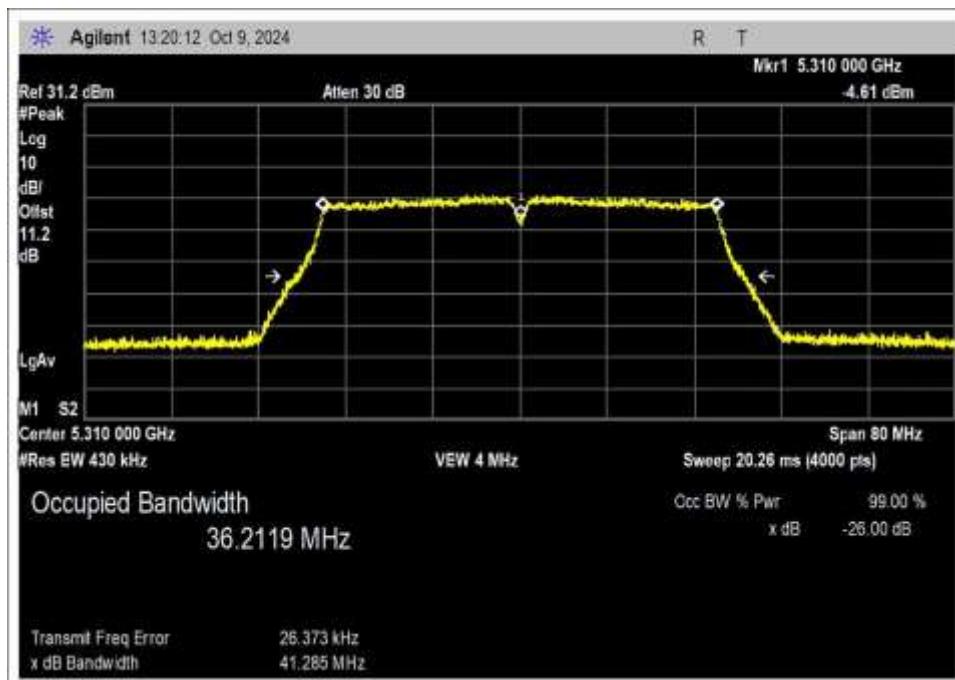


High Channel

802.11ac 80MHz

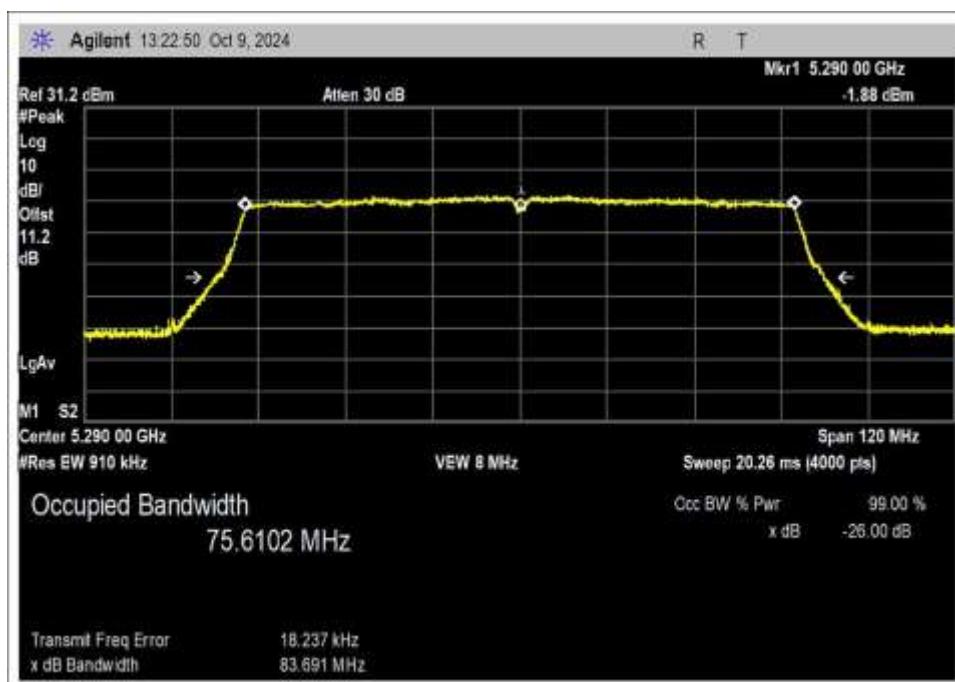


Chain 1
802.11a


Low Channel

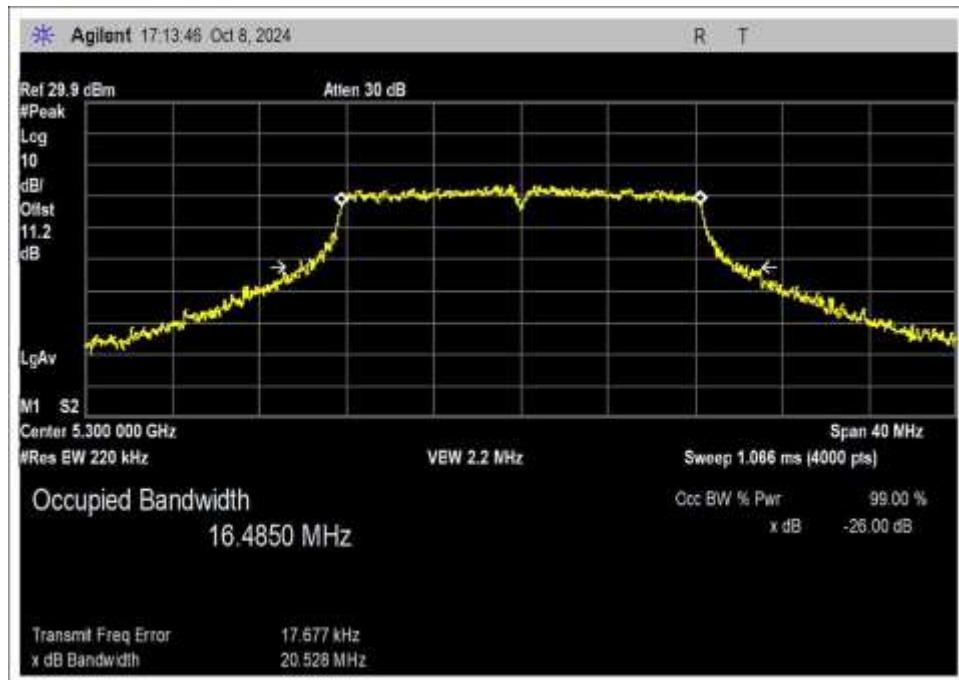


Middle Channel

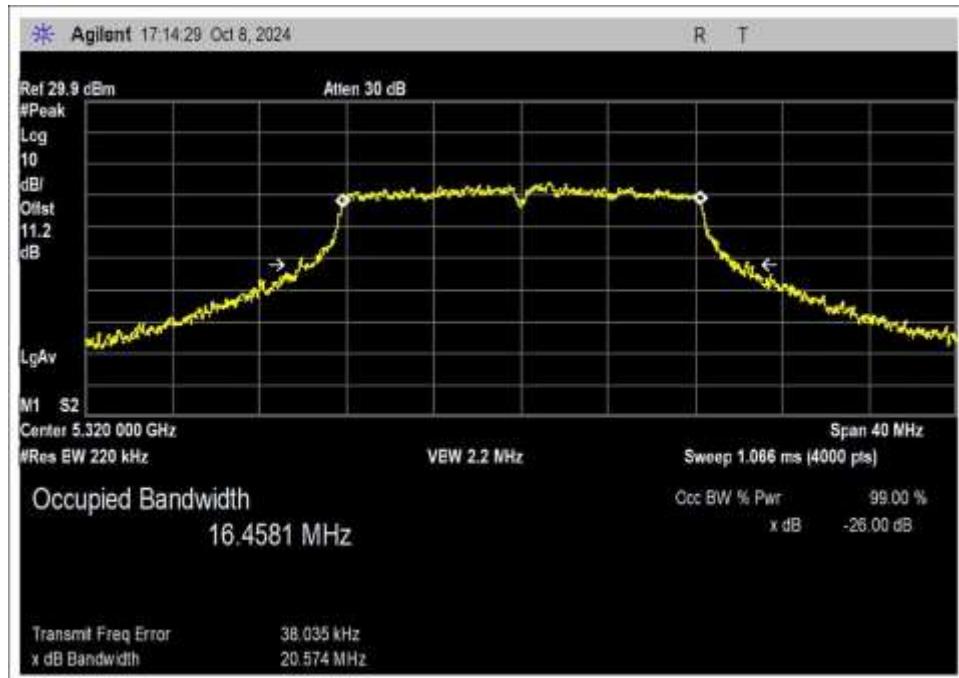


High Channel


802.11n HT20

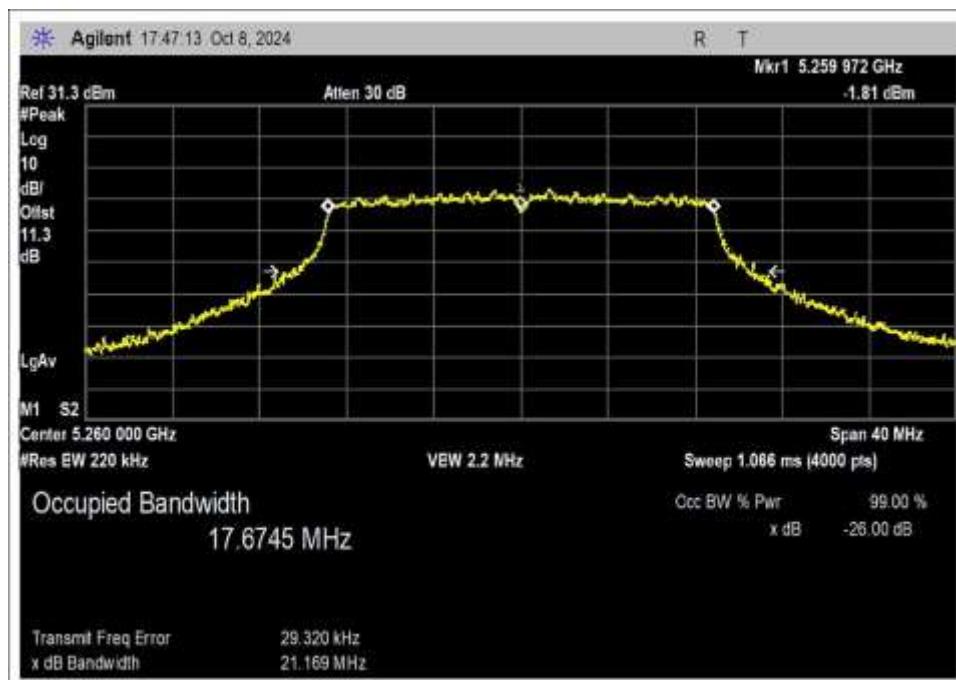


Low Channel

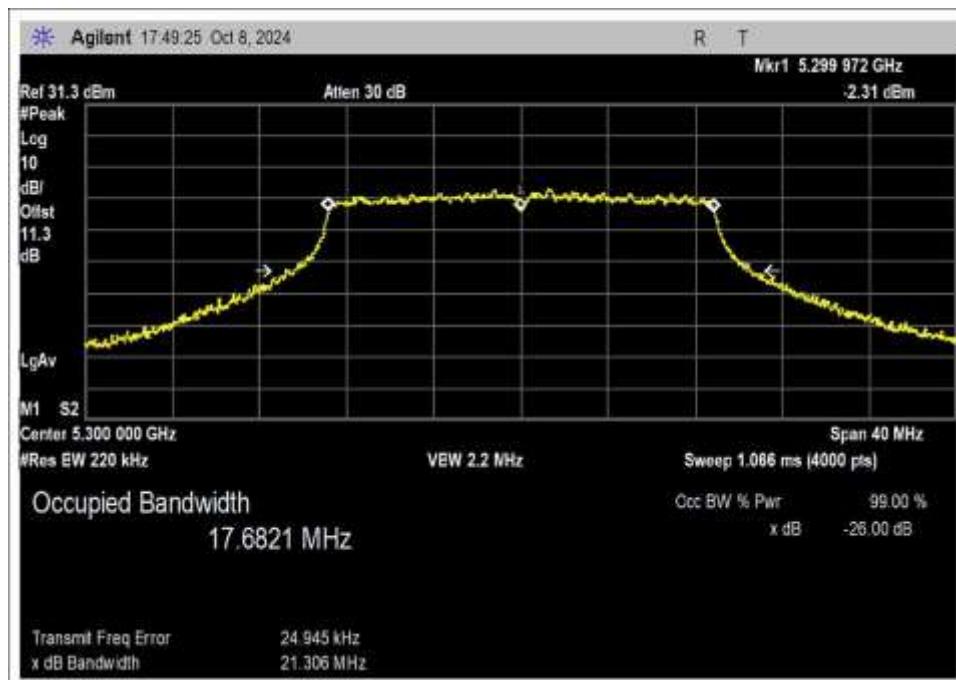


Middle Channel

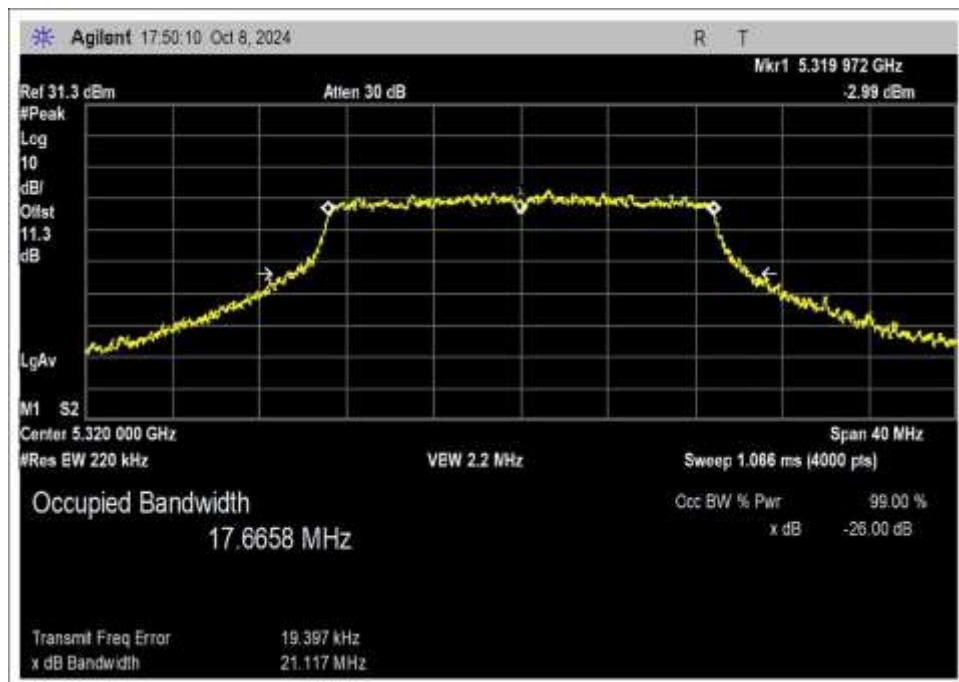


High Channel

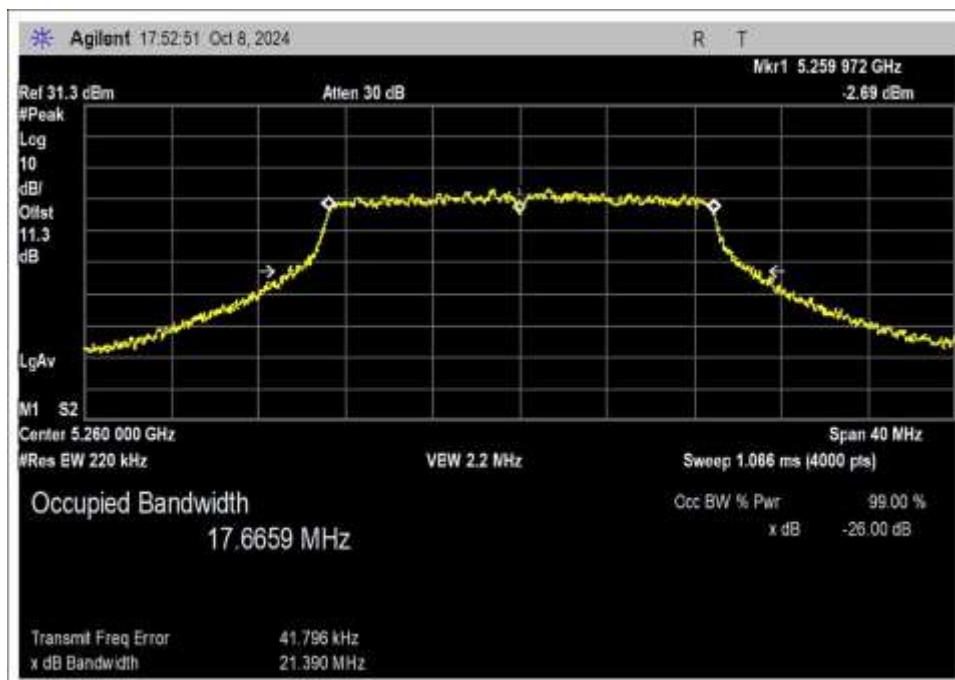802.11ac 20MHz


Low Channel

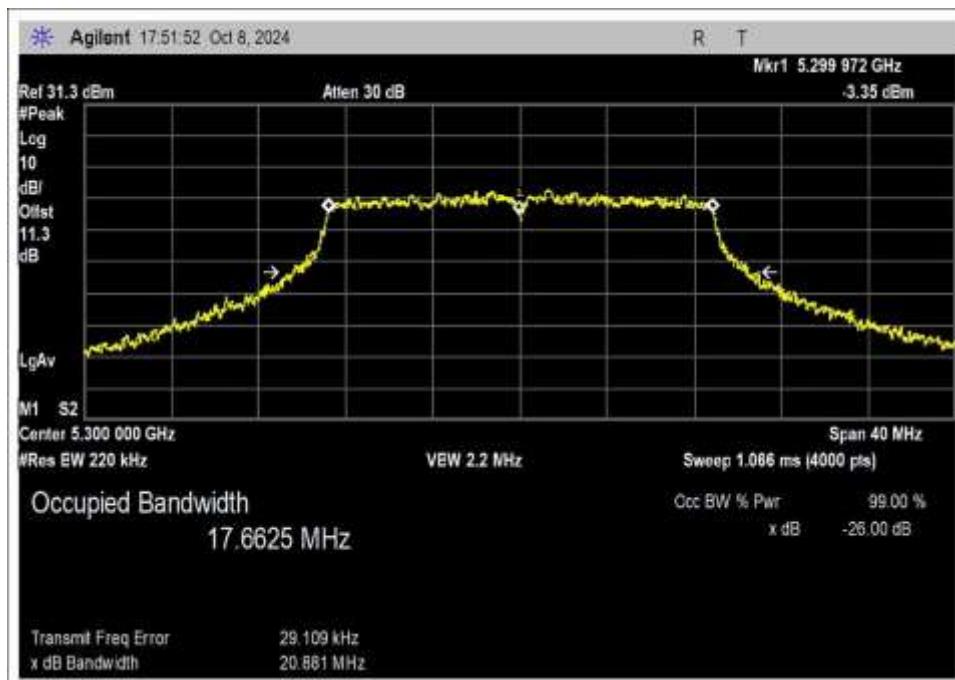


Middle Channel

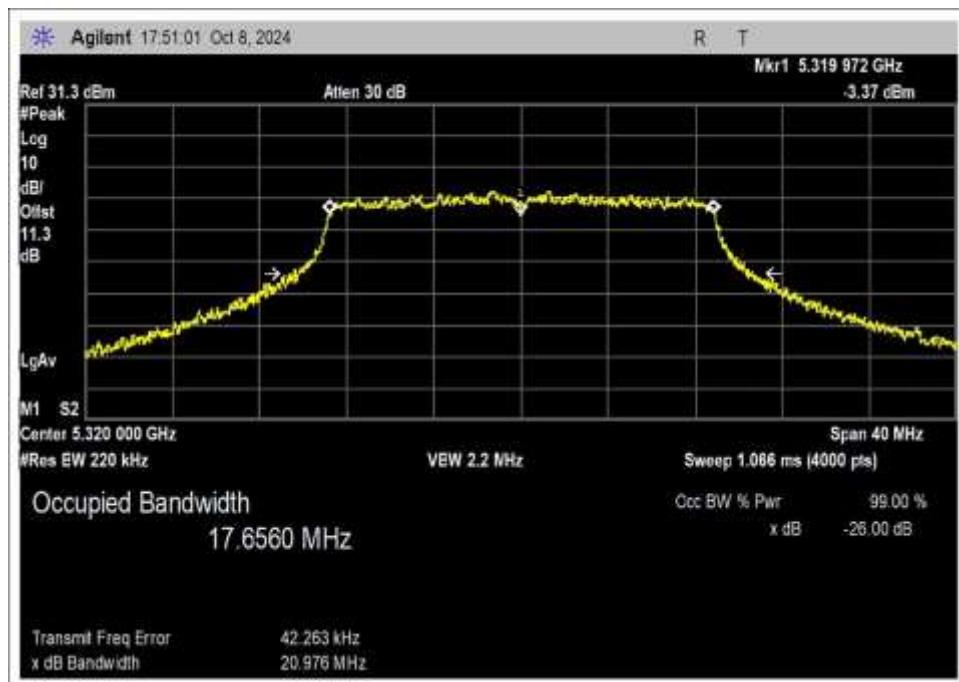


High Channel


802.11 n HT40

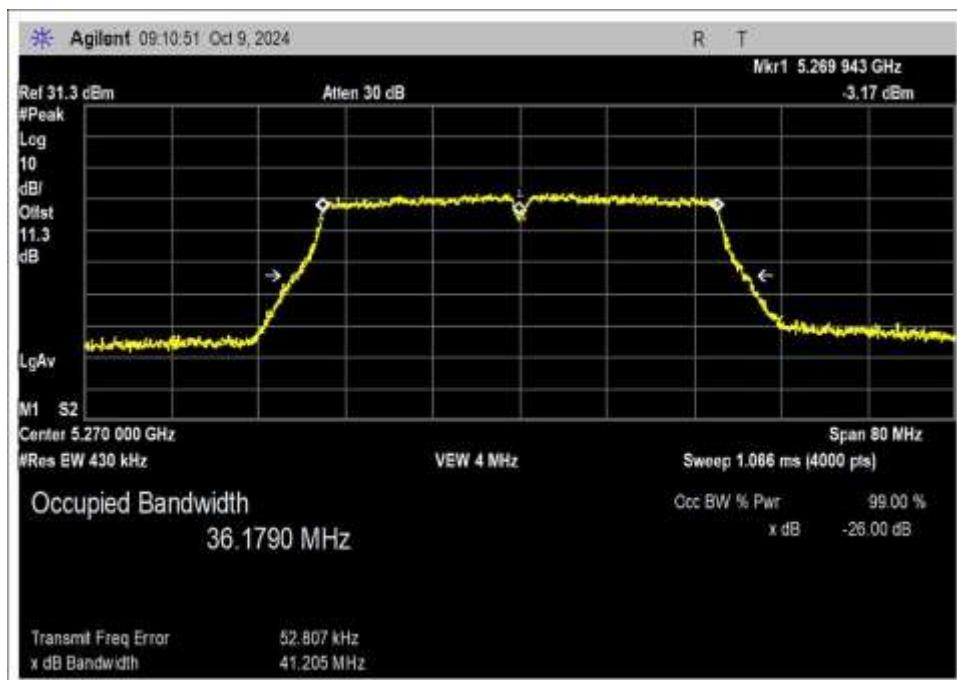


Low Channel

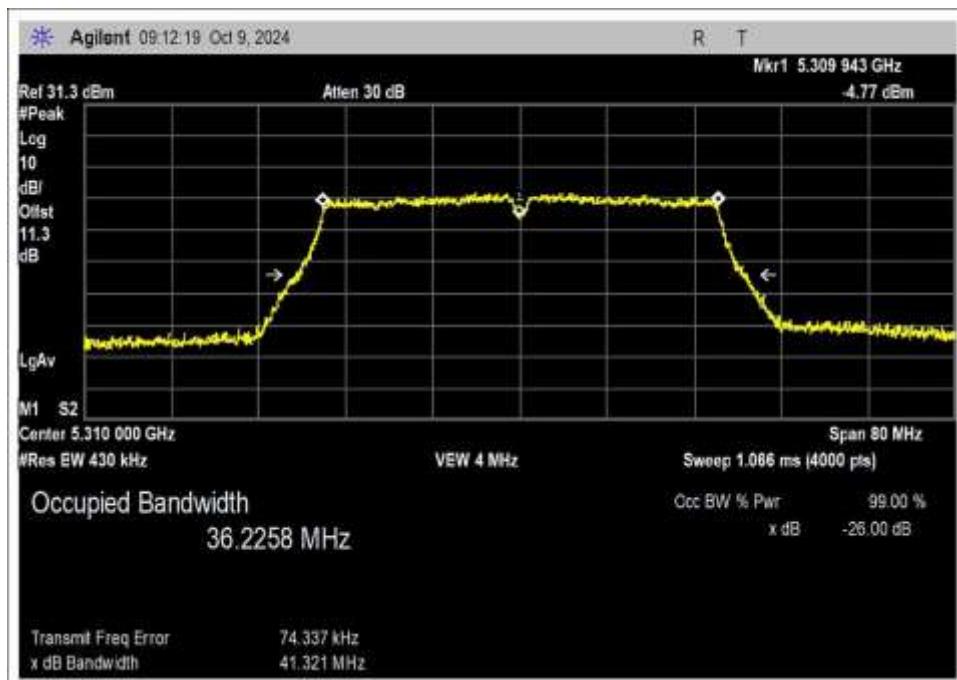

High Channel

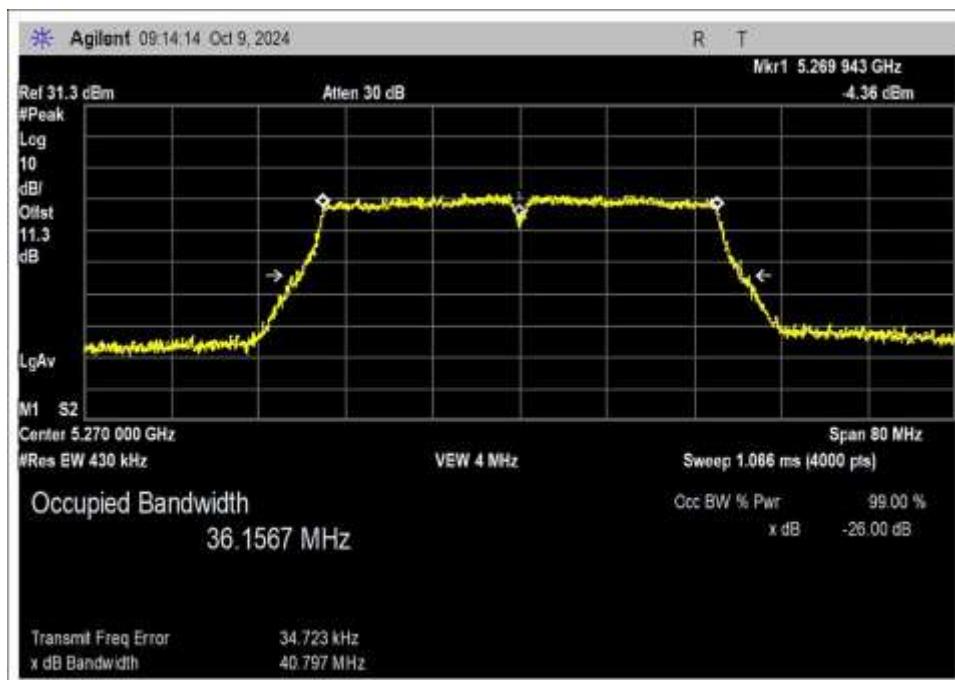
802.11ac 40MHz


Low Channel

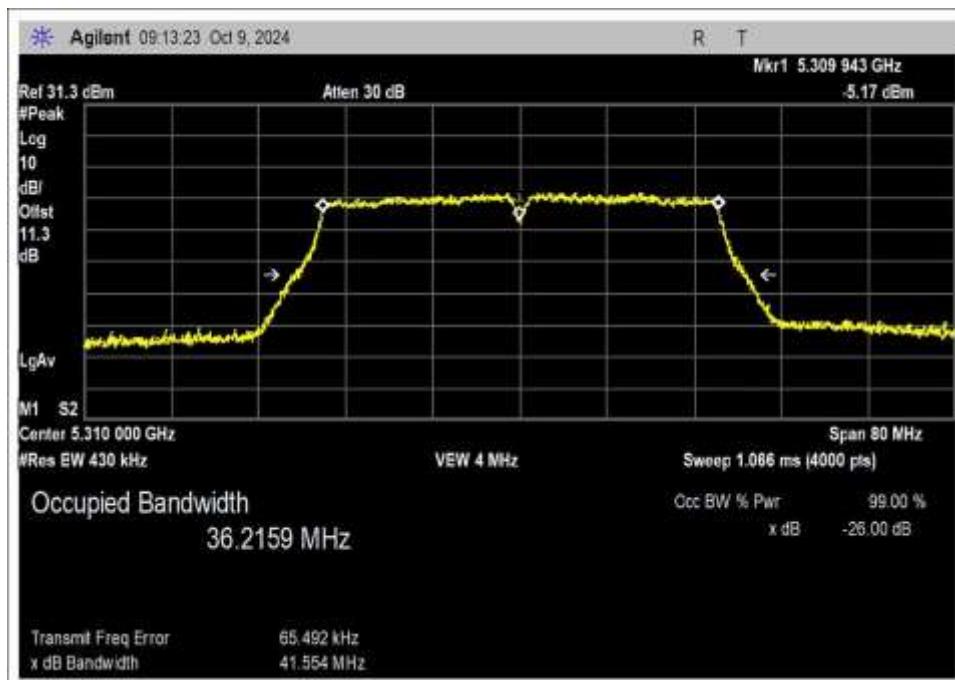

High Channel

802.11ac 80MHz

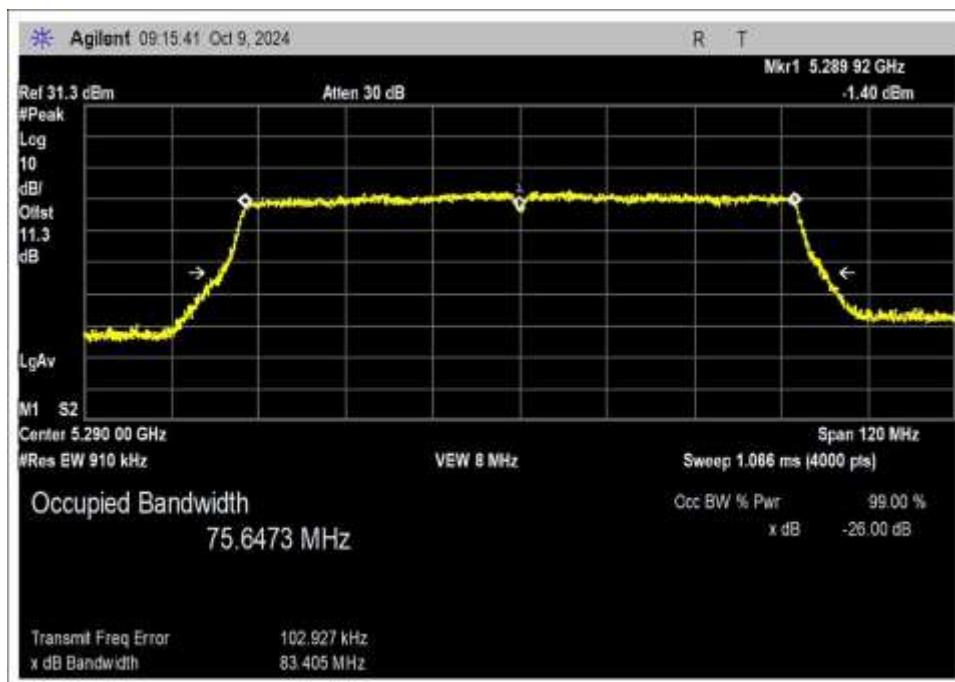

Test Setup Photo(s)



Test Setup



Test Setup, Close View

15.407(a) Output Power

Test Setup/Conditions			
Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions			
Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V _{Minimum} (dBm)	V _{Nominal} (dBm)	V _{Maximum} (dBm)	Max Deviation from V _{Nominal} (dB)
5260	802.11a/1	13.25	13.29	13.29	0.03
5300	802.11a/1	13.11	13.12	13.13	0.02
5320	802.11a/1	12.71	12.73	12.74	0.01

Test performed using operational mode with the highest output power, representing worst case.

Parameter Definitions:

Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	12VDC
V _{Minimum} :	10.2VDC
V _{Maximum} :	13.8VDC

Test Data Summary - RF Conducted Measurement-Chain 0

Measurement Option: AVGSA-1

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	RF Conducted (dBm)		EIRP (dBm)		Results
			Measured	Limit	Calculated	Limit	
5260	802.11a	External/4.66	12.45	≤24	17.11	≤30	Pass
5300	802.11a	External/4.66	12.17	≤24	16.83	≤30	Pass
5320	802.11a	External/4.66	12.01	≤24	16.67	≤30	Pass
5260	802.11n HT20	External/4.66	12.32	≤24	16.98	≤30	Pass
5300	802.11n HT20	External/4.66	11.96	≤24	16.62	≤30	Pass
5320	802.11n HT20	External/4.66	11.88	≤24	16.54	≤30	Pass
5260	802.11ac 20MHz	External/4.66	12.30	≤24	16.96	≤30	Pass
5300	802.11ac 20MHz	External/4.66	11.97	≤24	16.63	≤30	Pass
5320	802.11ac 20MHz	External/4.66	11.91	≤24	16.57	≤30	Pass
5270	802.11n HT40	External/4.66	12.23	≤24	16.89	≤30	Pass
5310	802.11n HT40	External/4.66	11.96	≤24	16.62	≤30	Pass
5270	802.11ac 40MHz	External/4.66	12.29	≤24	16.95	≤30	Pass
5310	802.11ac 40MHz	External/4.66	11.94	≤24	16.6	≤30	Pass
5290	802.11ac 80MHz	External/4.66	11.81	≤24	16.47	≤30	Pass

Test Data Summary - RF Conducted Measurement-Chain 1

Measurement Option: AVGSA-1

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	RF Conducted (dBm)		EIRP (dBm)		Results
			Measured	Limit	Calculated	Limit	
5260	802.11a	External/4.66	13.29	≤24	17.95	≤30	Pass
5300	802.11a	External/4.66	13.12	≤24	17.78	≤30	Pass
5320	802.11a	External/4.66	12.73	≤24	17.39	≤30	Pass
5260	802.11n HT20	External/4.66	13.13	≤24	17.79	≤30	Pass
5300	802.11n HT20	External/4.66	12.93	≤24	17.59	≤30	Pass
5320	802.11n HT20	External/4.66	12.61	≤24	17.27	≤30	Pass
5260	802.11ac 20MHz	External/4.66	13.01	≤24	17.67	≤30	Pass
5300	802.11ac 20MHz	External/4.66	13.03	≤24	17.69	≤30	Pass
5320	802.11ac 20MHz	External/4.66	12.43	≤24	17.09	≤30	Pass
5270	802.11n HT40	External/4.66	13.01	≤24	17.67	≤30	Pass
5310	802.11n HT40	External/4.66	12.71	≤24	17.37	≤30	Pass
5270	802.11ac 40MHz	External/4.66	13.03	≤24	17.69	≤30	Pass
5310	802.11ac 40MHz	External/4.66	12.77	≤24	17.43	≤30	Pass
5290	802.11ac 80MHz	External/4.66	12.46	≤24	17.12	≤30	Pass



EIRP is calculated as RF conducted power (dBm) + antenna gain (dBi)


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The limit is calculated in accordance with 15.407(a)(2):


$$\text{Limit} = \text{The lesser of } \begin{cases} 24 \text{ dBm} - (G - 6) \\ 11 \text{ dBm} + 10 \log(B) - (G - 6) \end{cases}$$

Plot Data – RF Conducted Measurement


Chain 0 802.11a

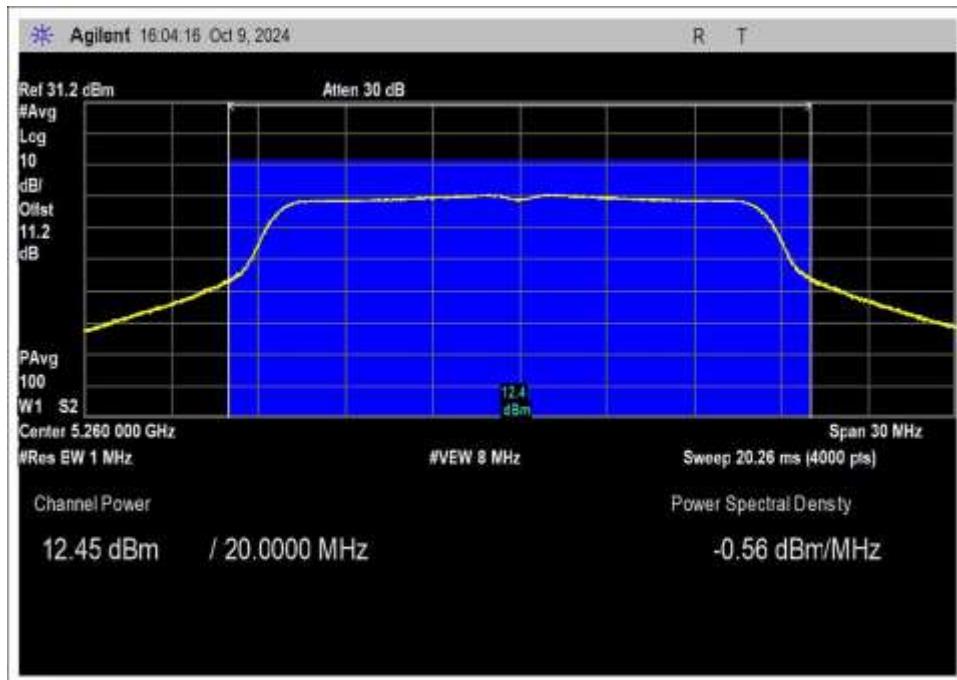


Low Channel

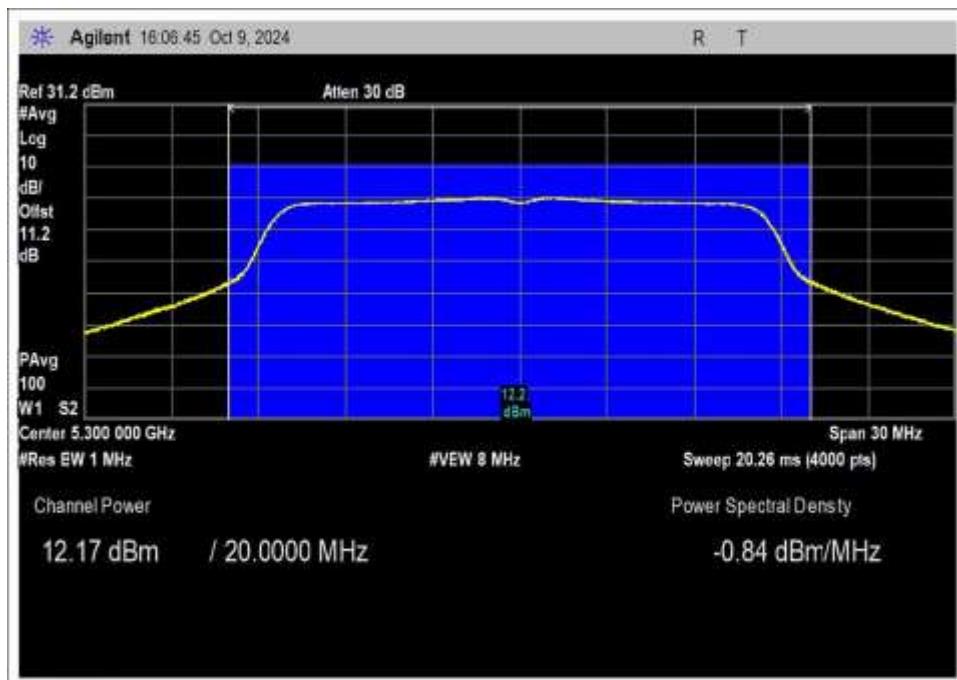


Middle Channel

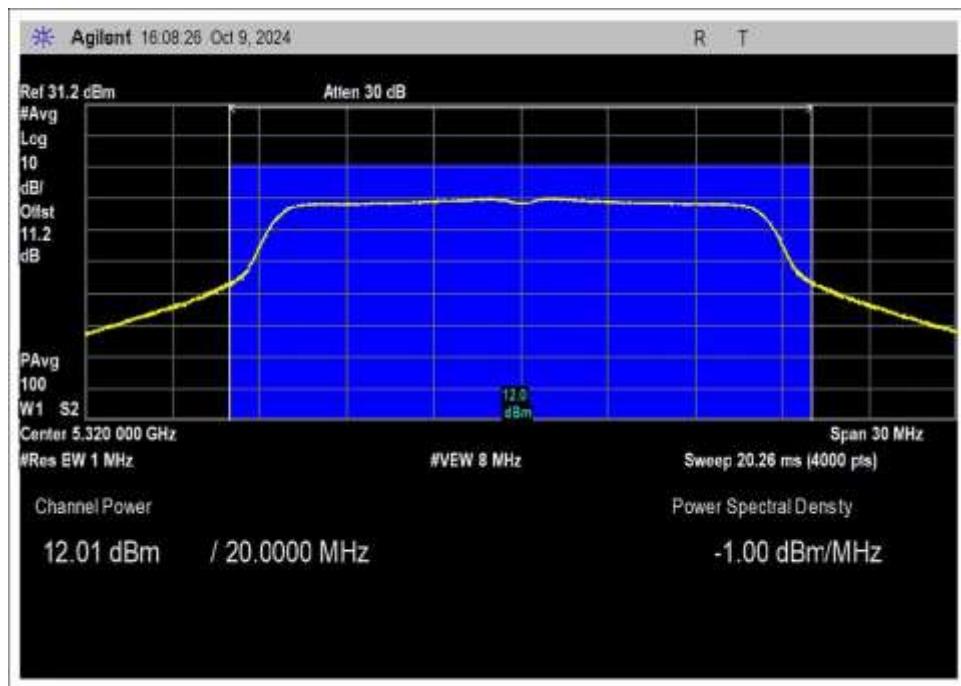


802.11n HT20

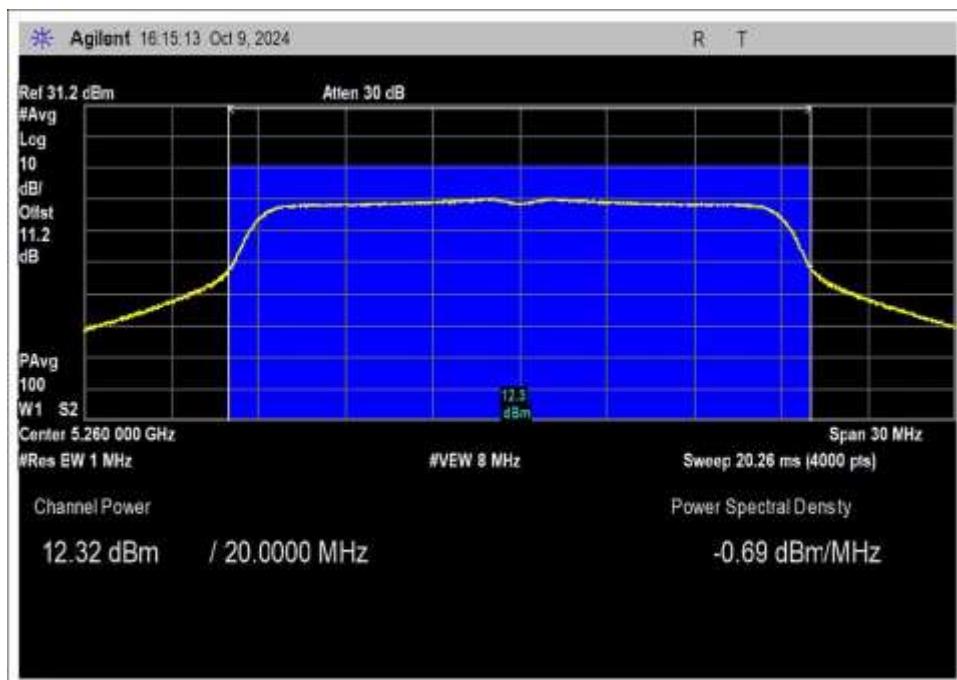


Low Channel

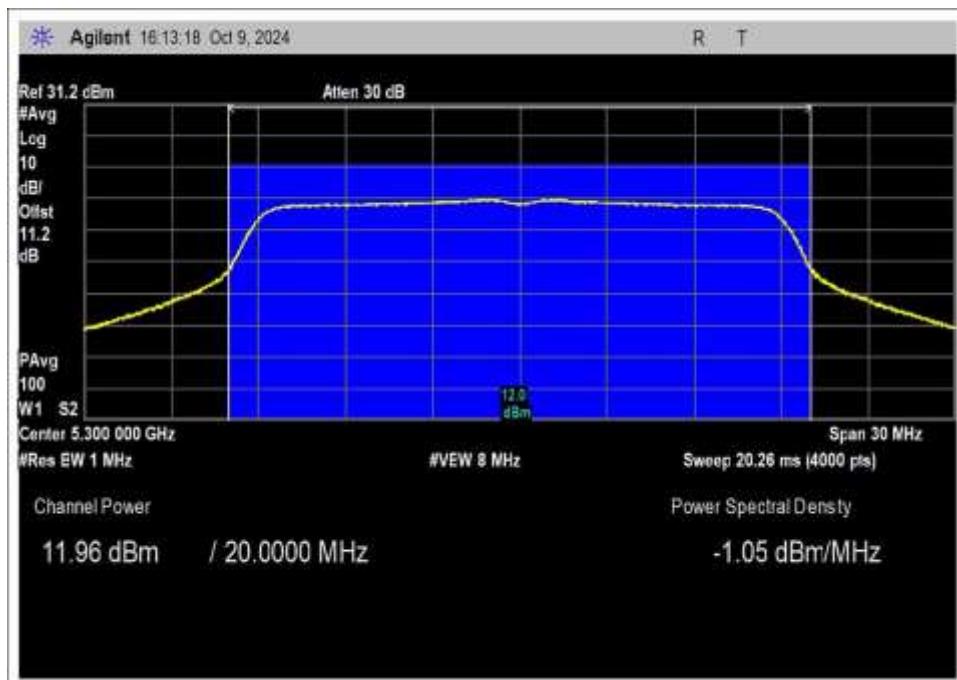


Middle Channel

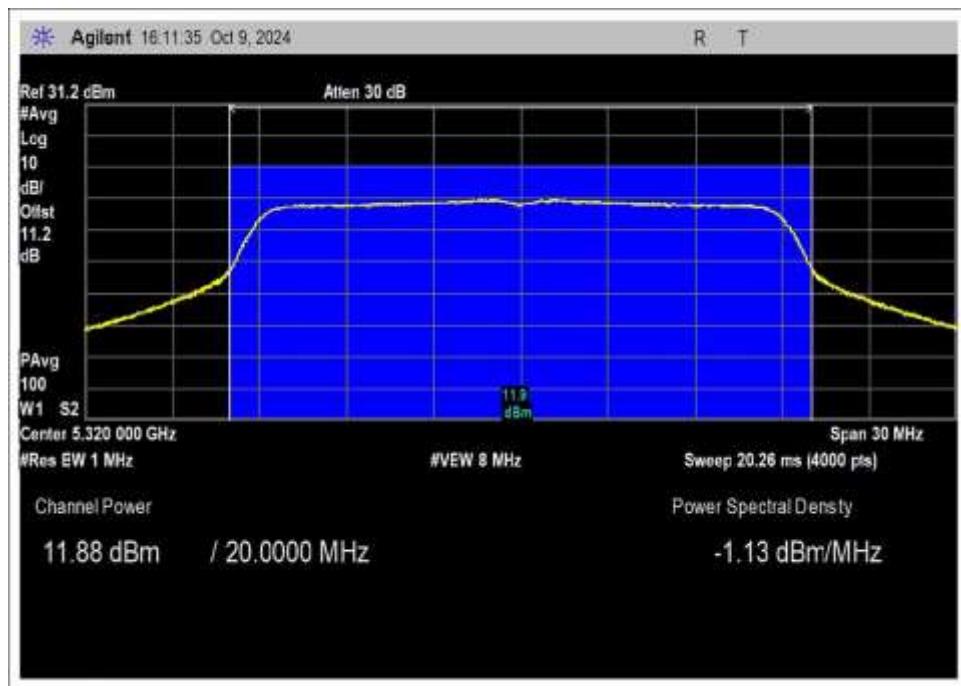


High Channel

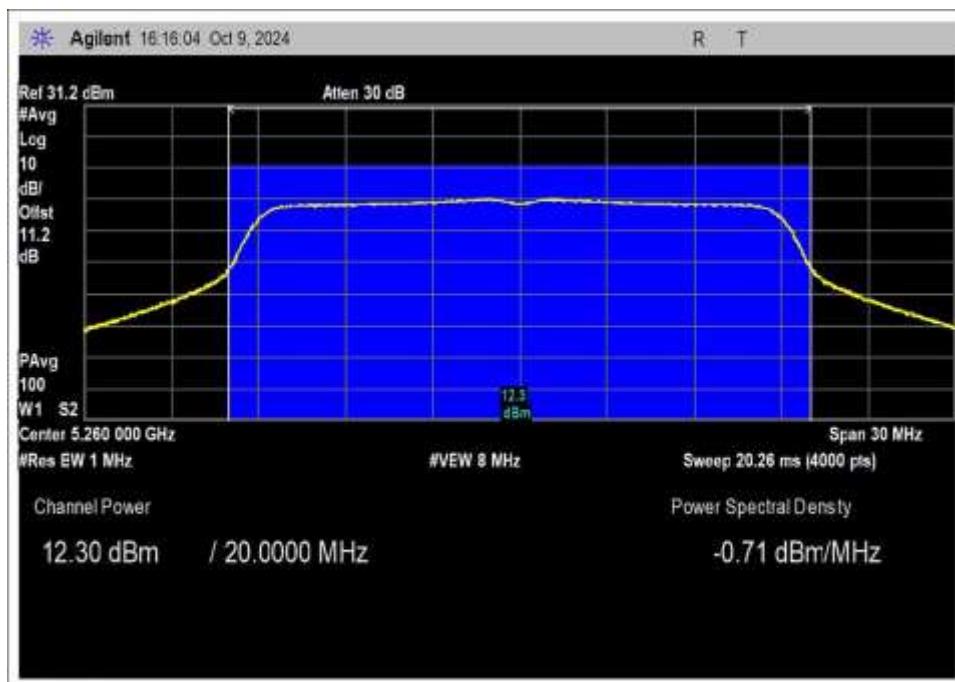802.11ac 20MHz


Low Channel

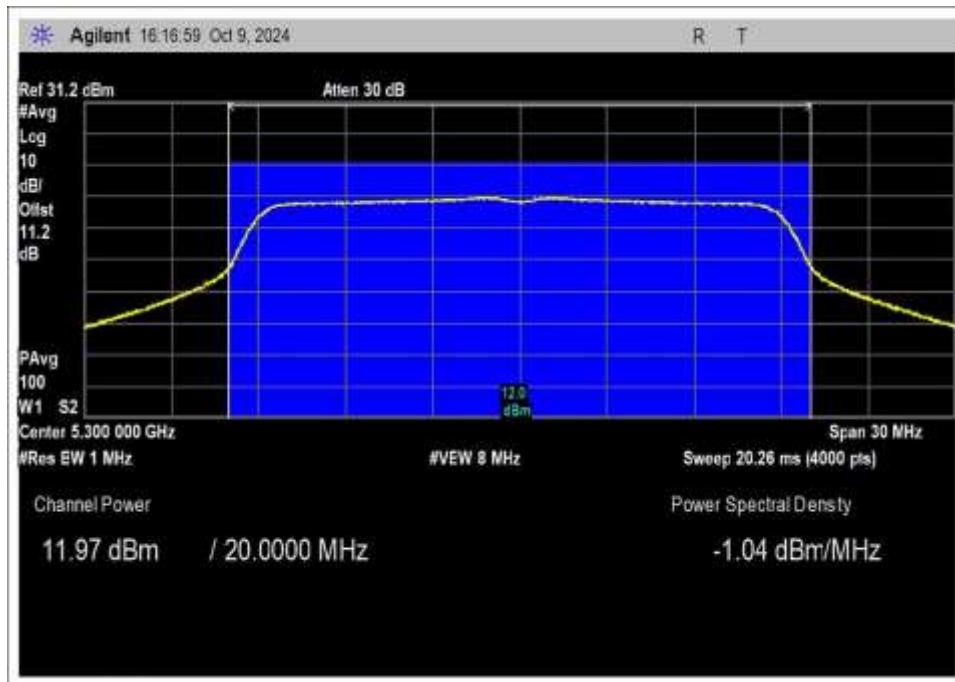


Middle Channel

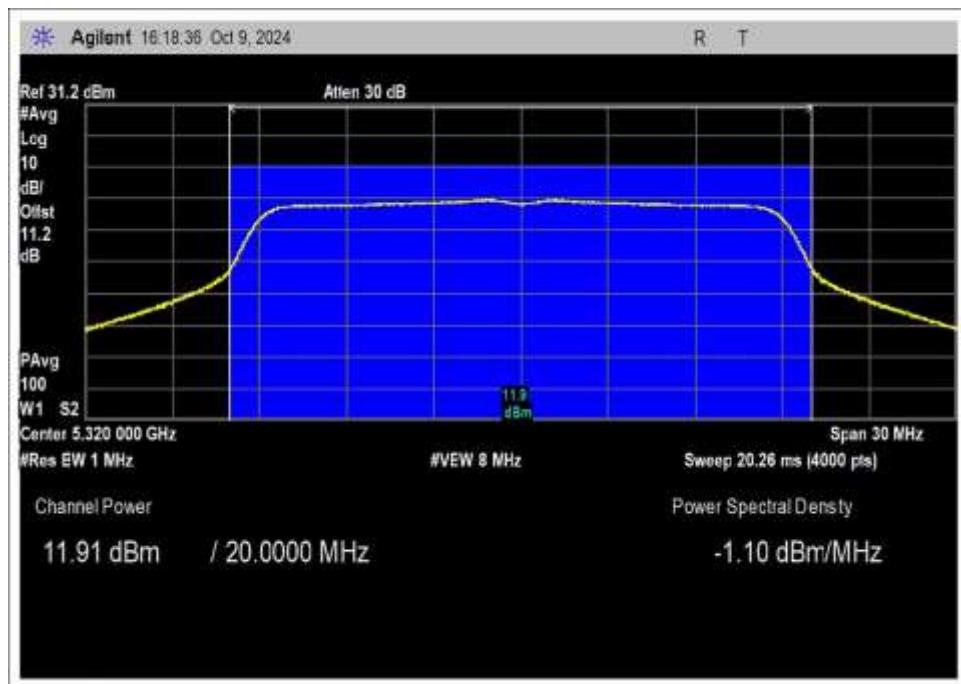


High Channel


802.11 n HT40

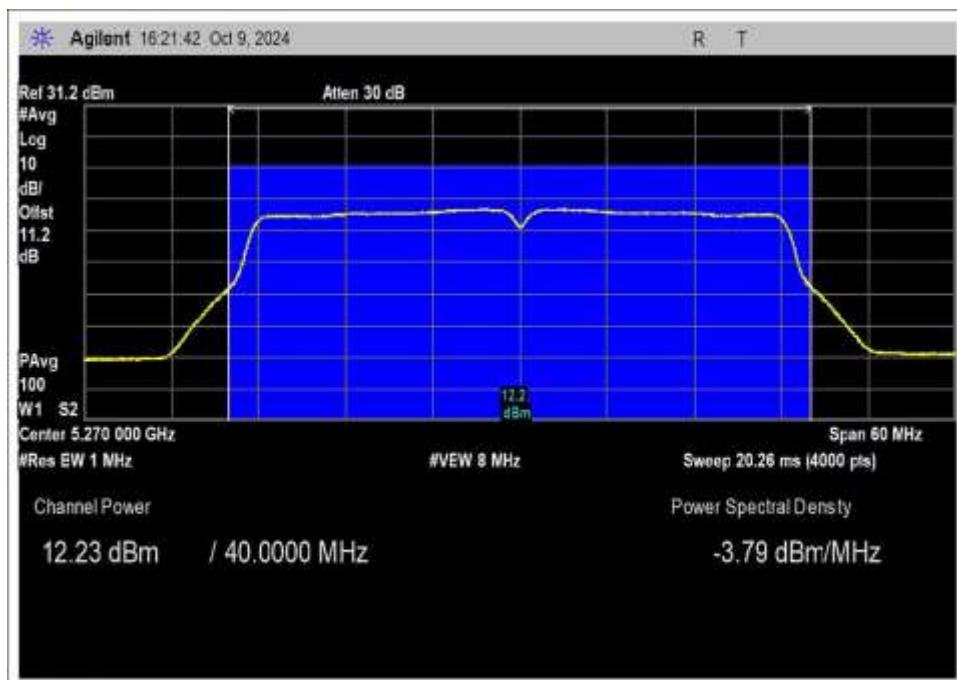


Low Channel

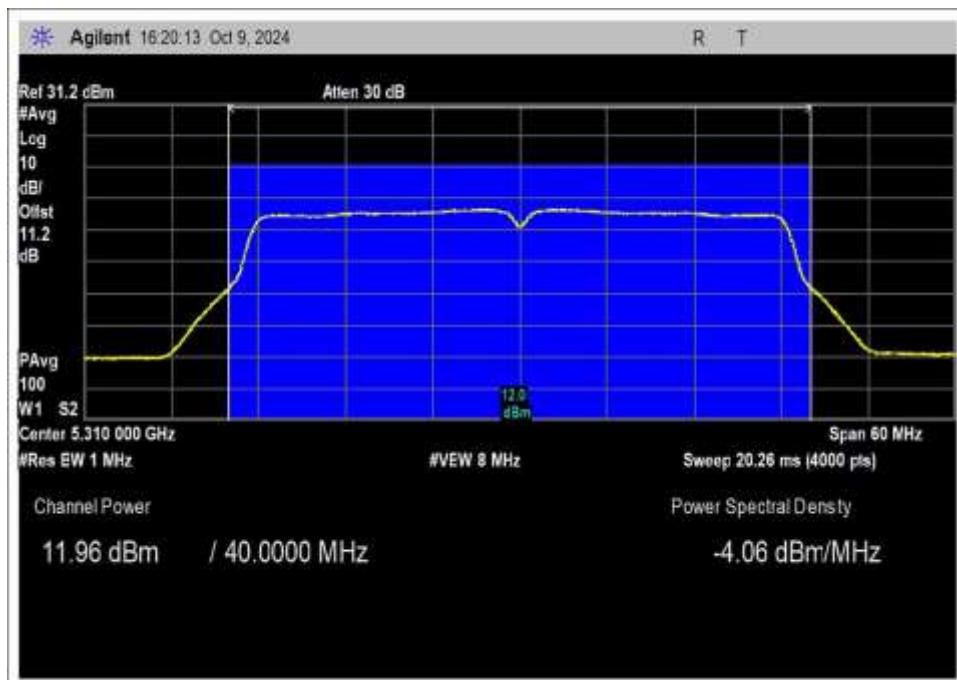

High Channel

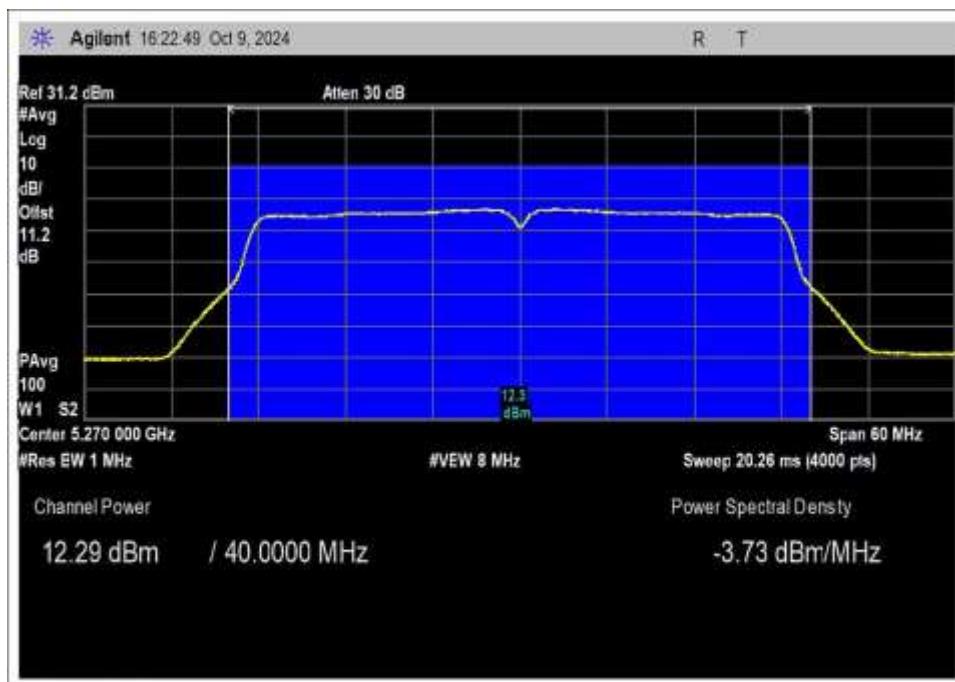
802.11ac 40MHz


Low Channel

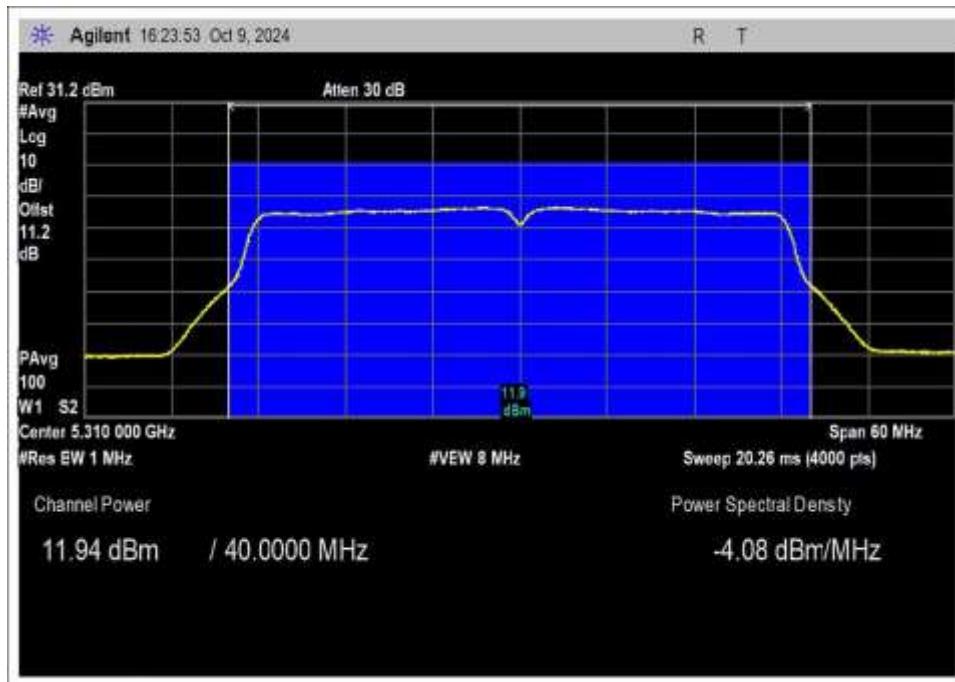


High Channel


802.11ac 80MHz

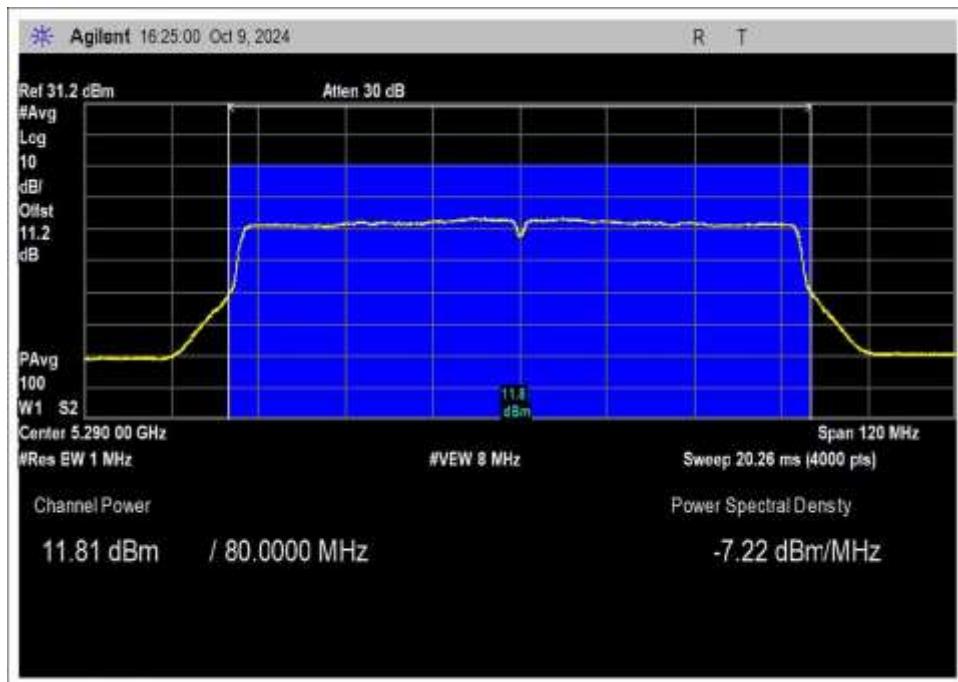


Chain 1
802.11a

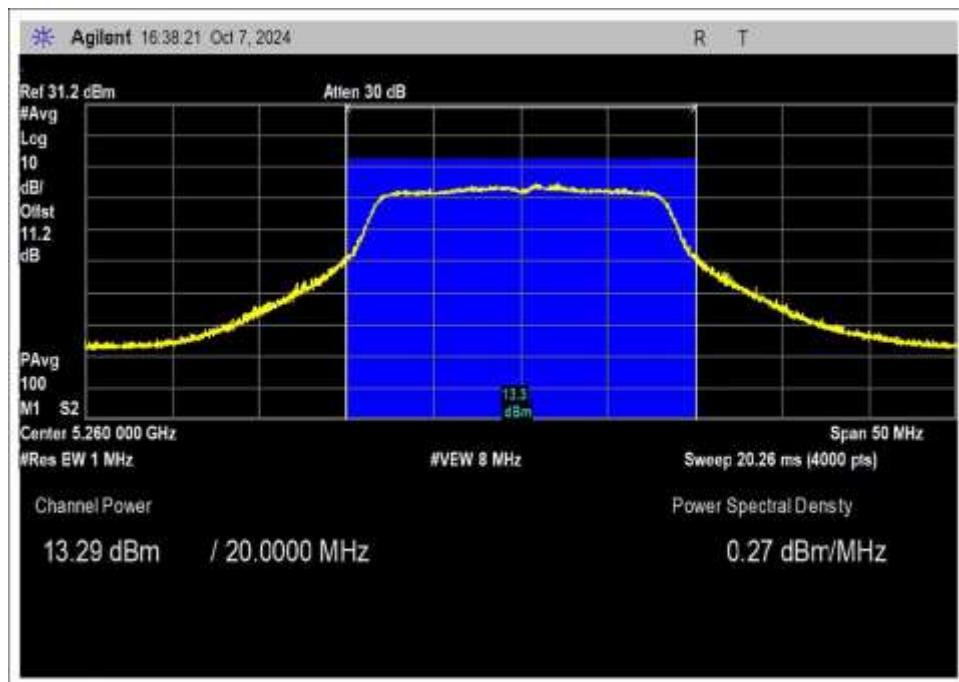

Low Channel

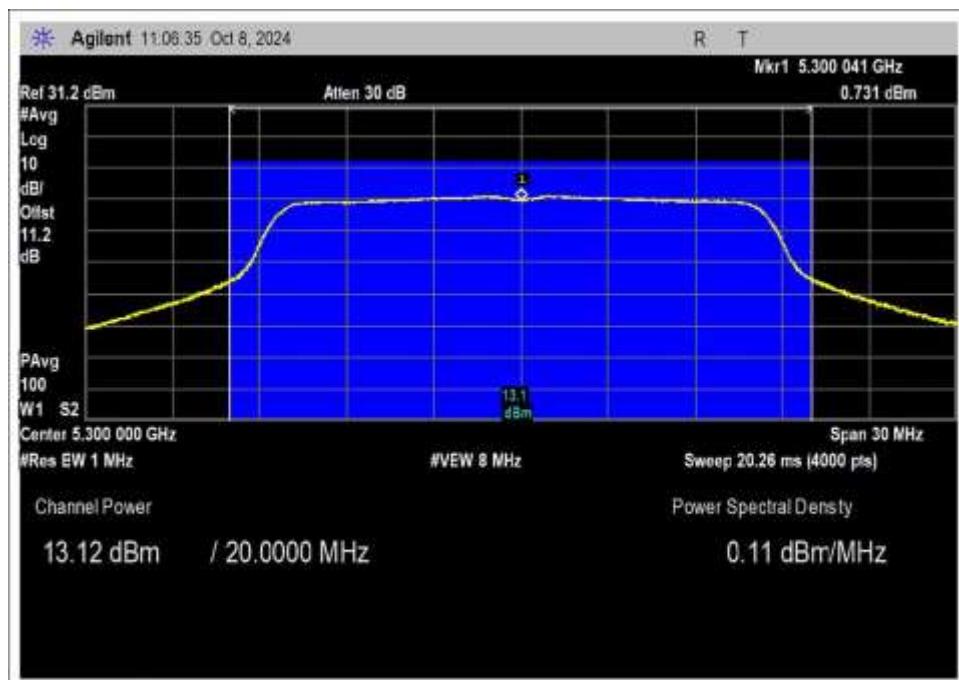


Middle Channel

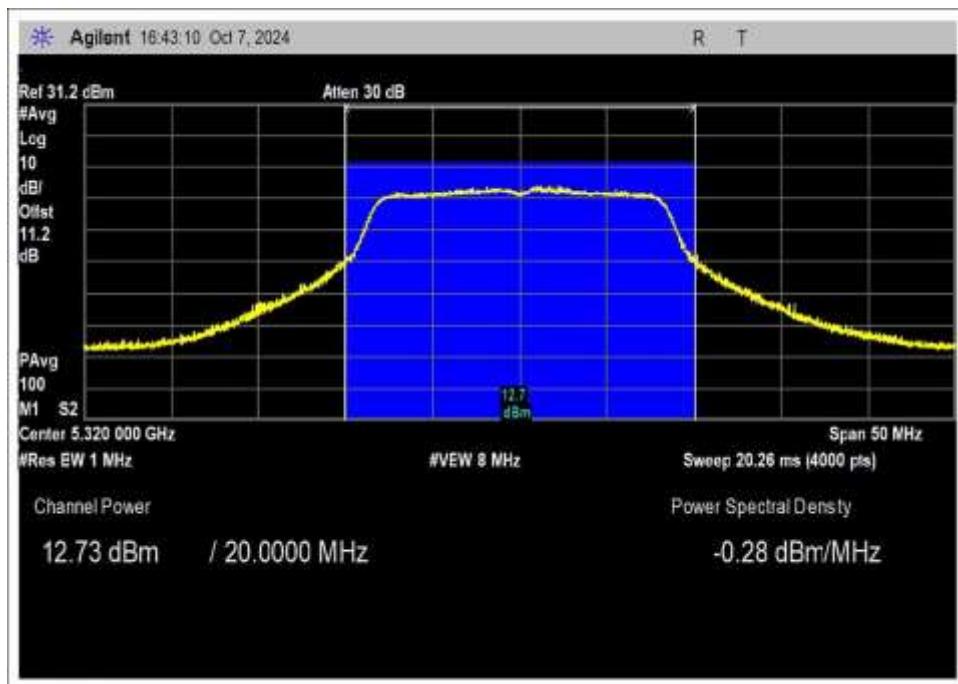


High Channel


802.11n HT20

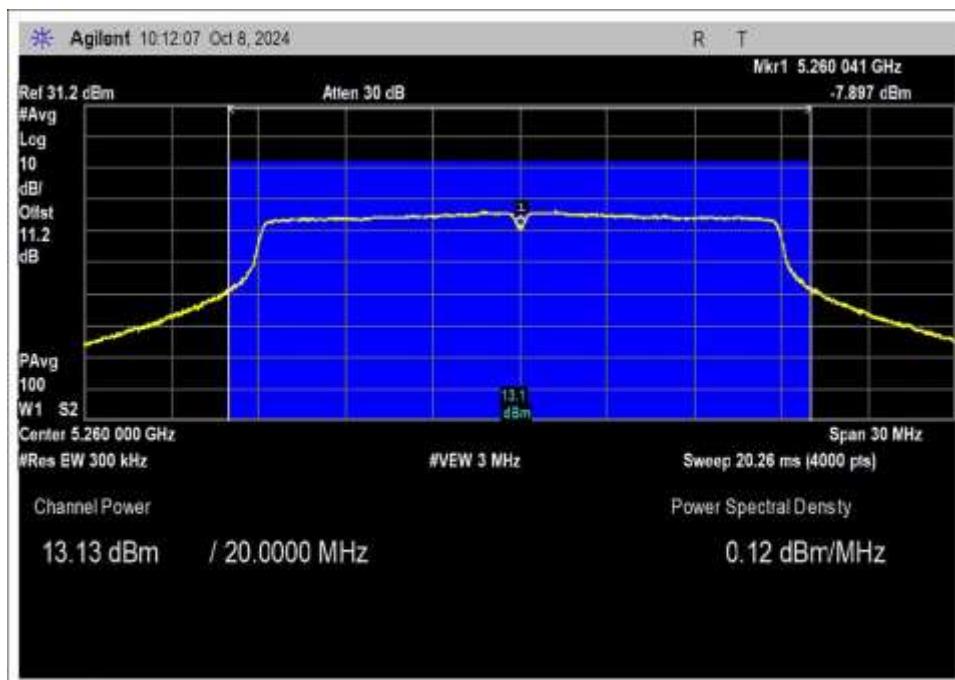


Low Channel

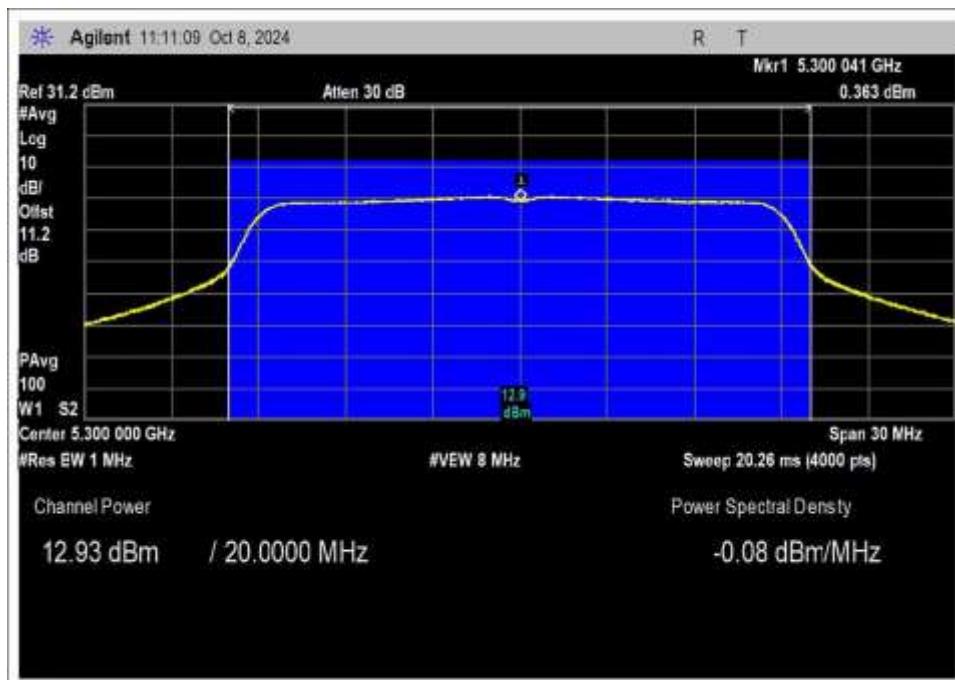


Middle Channel

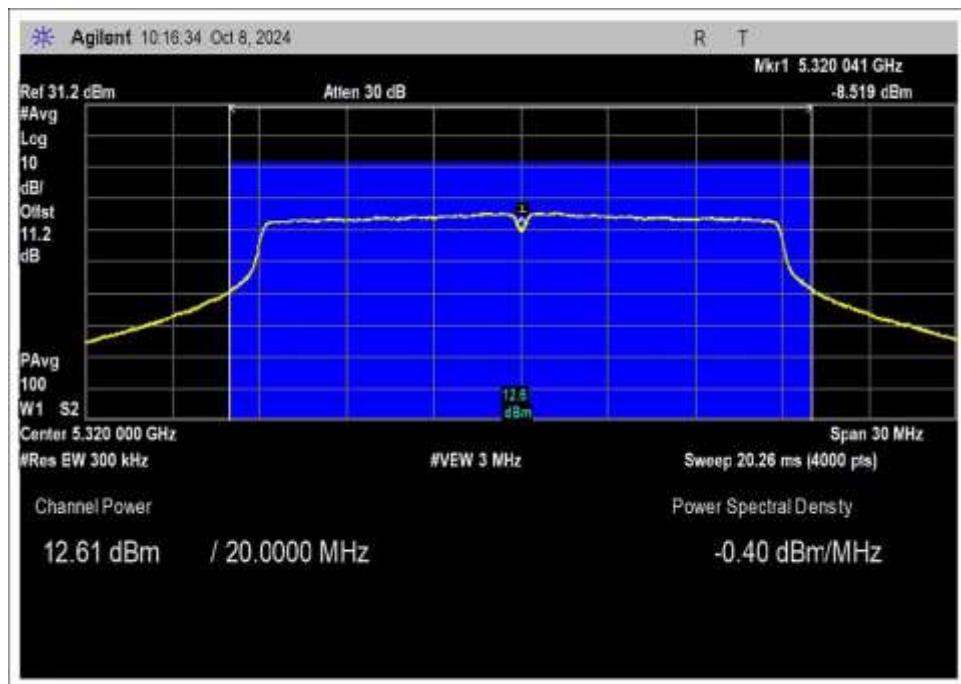


High Channel

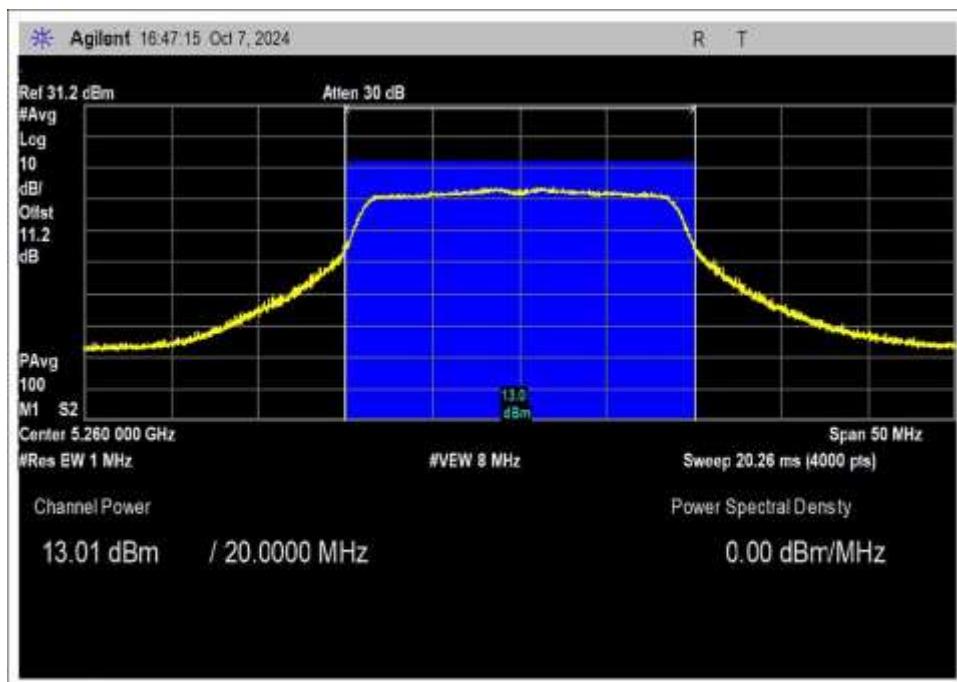802.11ac 20MHz


Low Channel

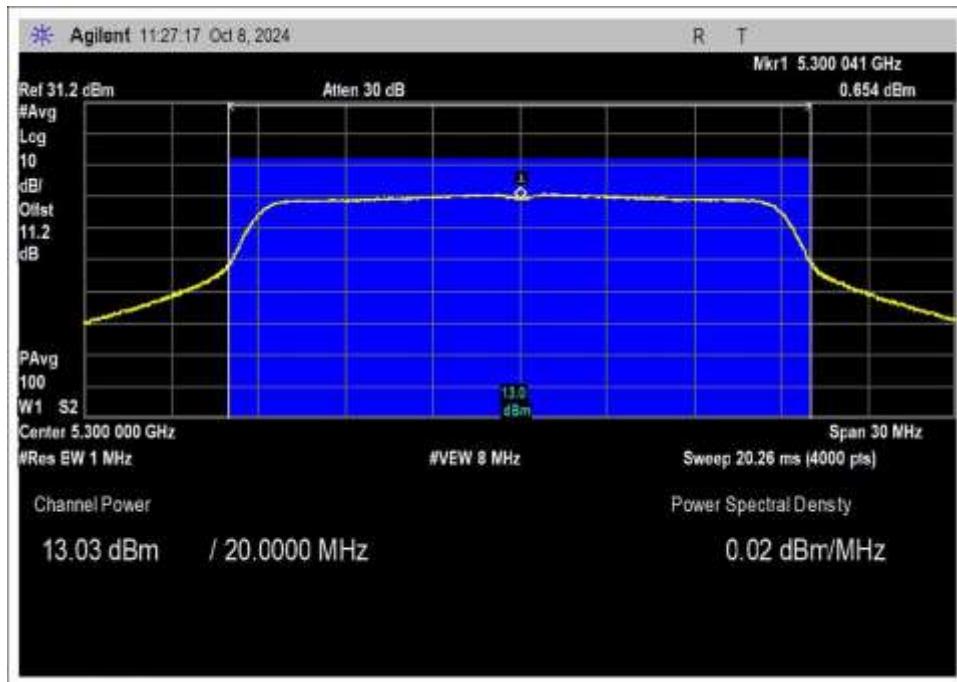


Middle Channel

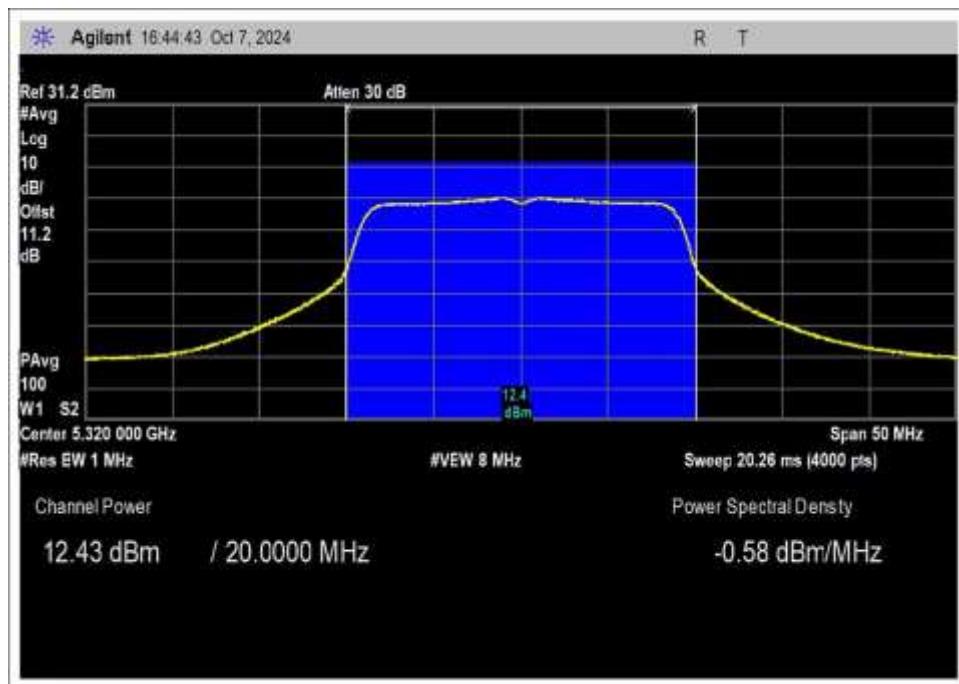


High Channel


802.11 n HT40

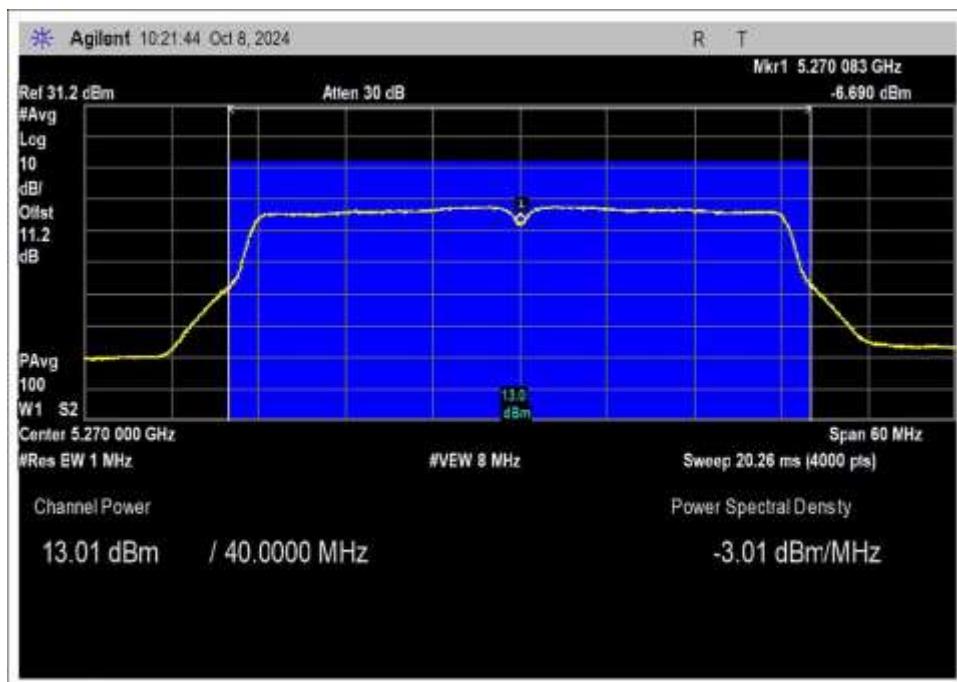


Low Channel

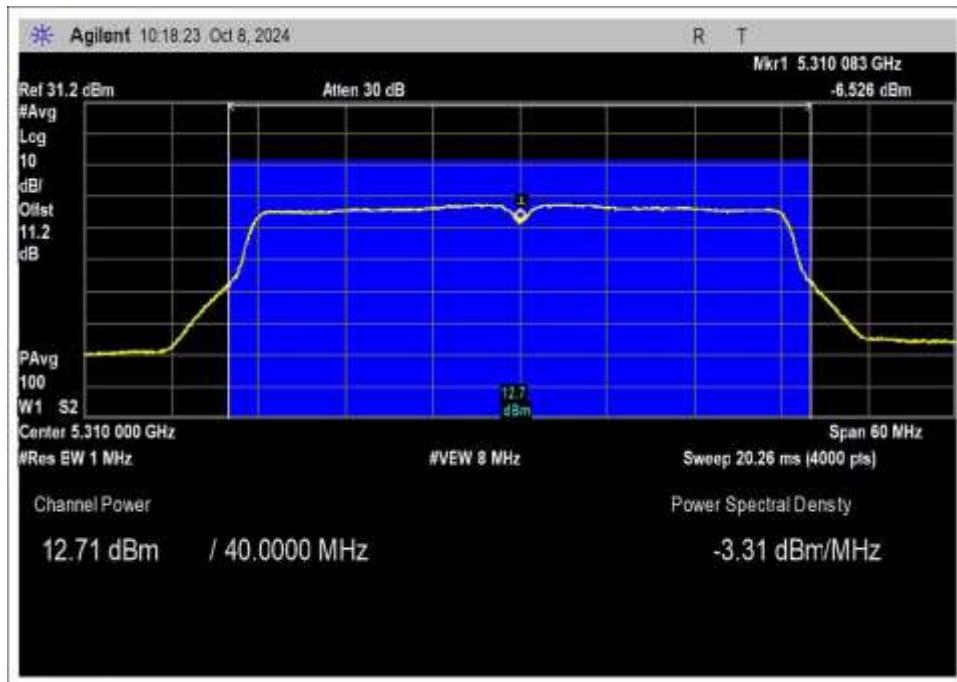

High Channel

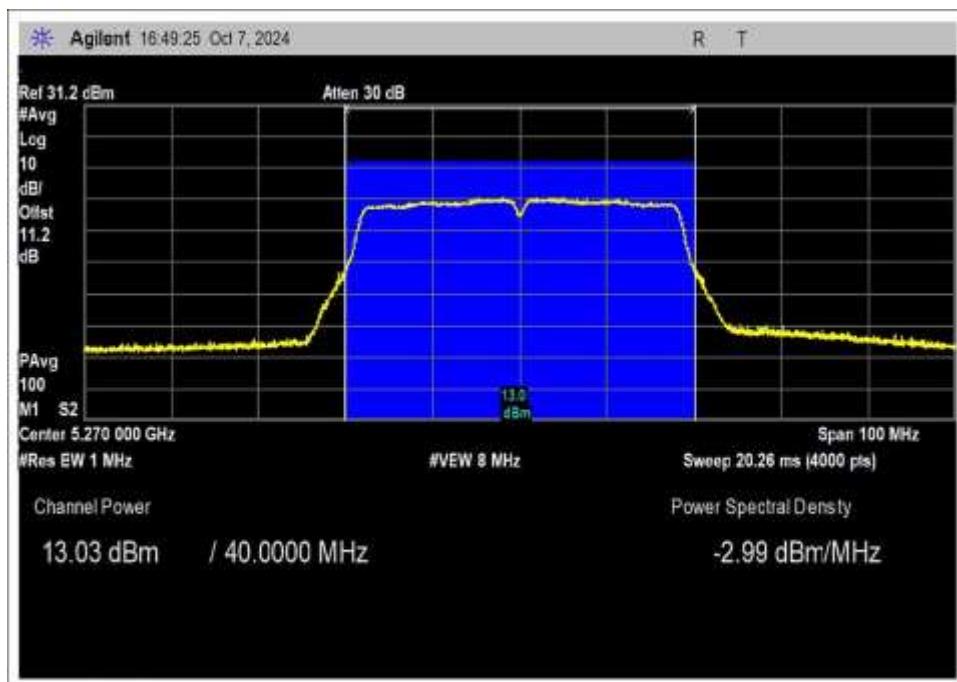
802.11ac 40MHz


Low Channel

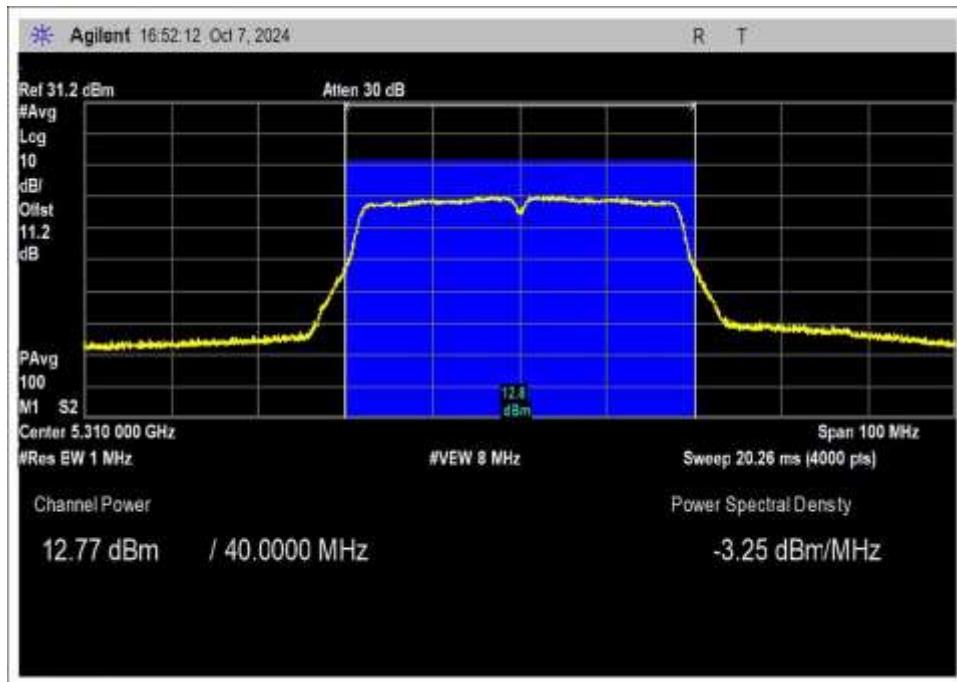

High Channel

802.11ac 80MHz

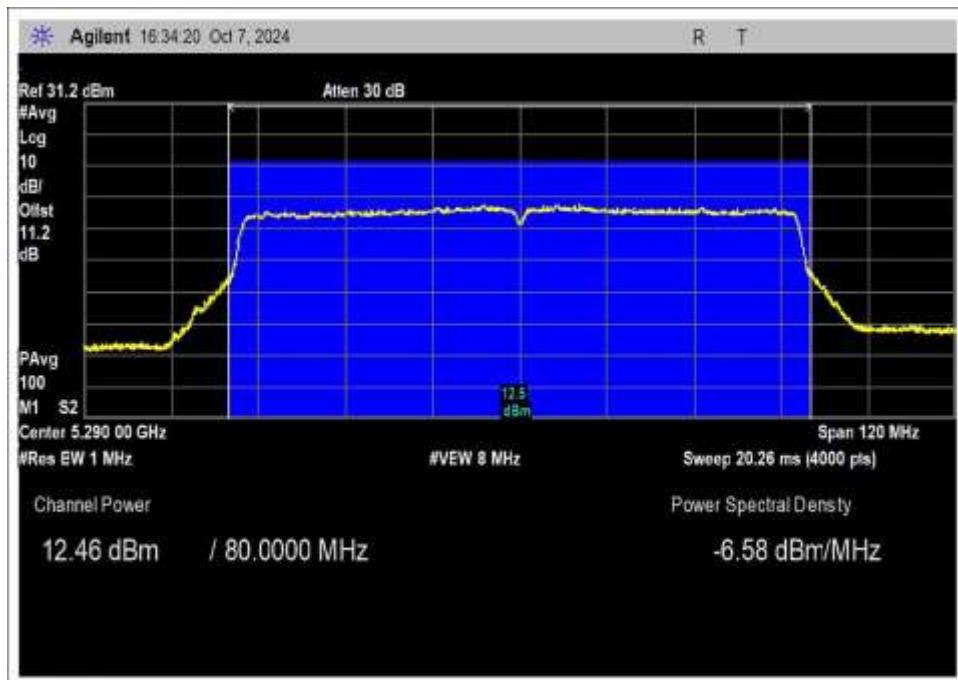

Test Setup Photo(s)



Test Setup



Test Setup, Close View

15.407(a) Power Spectral Density

Test Setup/Conditions			
Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions			
Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026

Test Data Summary - RF Conducted Measurement-Chain 0

Measurement Option: AVGSA-1

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm/MHz)	Limit (dBm/MHz)	Results
5260	802.11a	External/4.66	-0.56	≤11	Pass
5300	802.11a	External/4.66	-0.84	≤11	Pass
5320	802.11a	External/4.66	-1.00	≤11	Pass
5260	802.11n HT20	External/4.66	-0.69	≤11	Pass
5300	802.11n HT20	External/4.66	-1.05	≤11	Pass
5320	802.11n HT20	External/4.66	-1.13	≤11	Pass
5260	802.11ac 20MHz	External/4.66	-0.71	≤11	Pass
5300	802.11ac 20MHz	External/4.66	-1.04	≤11	Pass
5320	802.11ac 20MHz	External/4.66	-1.10	≤11	Pass
5270	802.11n HT40	External/4.66	-3.79	≤11	Pass
5310	802.11n HT40	External/4.66	-4.06	≤11	Pass
5270	802.11ac 40MHz	External/4.66	-3.73	≤11	Pass
5310	802.11ac 40MHz	External/4.66	-4.08	≤11	Pass
5290	802.11ac 80MHz	External/4.66	-7.22	≤11	Pass



Test Data Summary - RF Conducted Measurement-Chain 1


Measurement Option: AVGSA-1

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm/MHz)	Limit (dBm/MHz)	Results
5260	802.11a	External/4.66	0.27	≤11	Pass
5300	802.11a	External/4.66	0.11	≤11	Pass
5320	802.11a	External/4.66	-0.28	≤11	Pass
5260	802.11n HT20	External/4.66	0.12	≤11	Pass
5300	802.11n HT20	External/4.66	-0.08	≤11	Pass
5320	802.11n HT20	External/4.66	-0.40	≤11	Pass
5260	802.11ac 20MHz	External/4.66	0.00	≤11	Pass
5300	802.11ac 20MHz	External/4.66	0.02	≤11	Pass
5320	802.11ac 20MHz	External/4.66	-0.58	≤11	Pass
5270	802.11n HT40	External/4.66	-3.01	≤11	Pass
5310	802.11n HT40	External/4.66	-3.31	≤11	Pass
5270	802.11ac 40MHz	External/4.66	-2.99	≤11	Pass
5310	802.11ac 40MHz	External/4.66	-3.25	≤11	Pass
5290	802.11ac 80MHz	External/4.66	-6.58	≤11	Pass

The limit is calculated in accordance with 15.407(a)(2):


$$\text{Limit} = 11 - \text{Roundup}(G - 6)$$

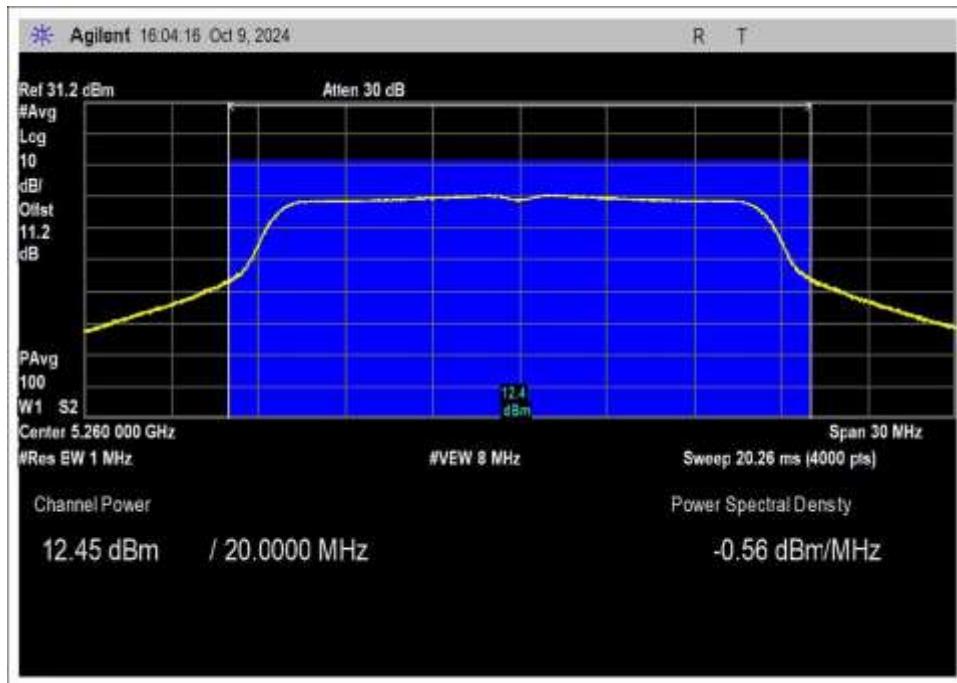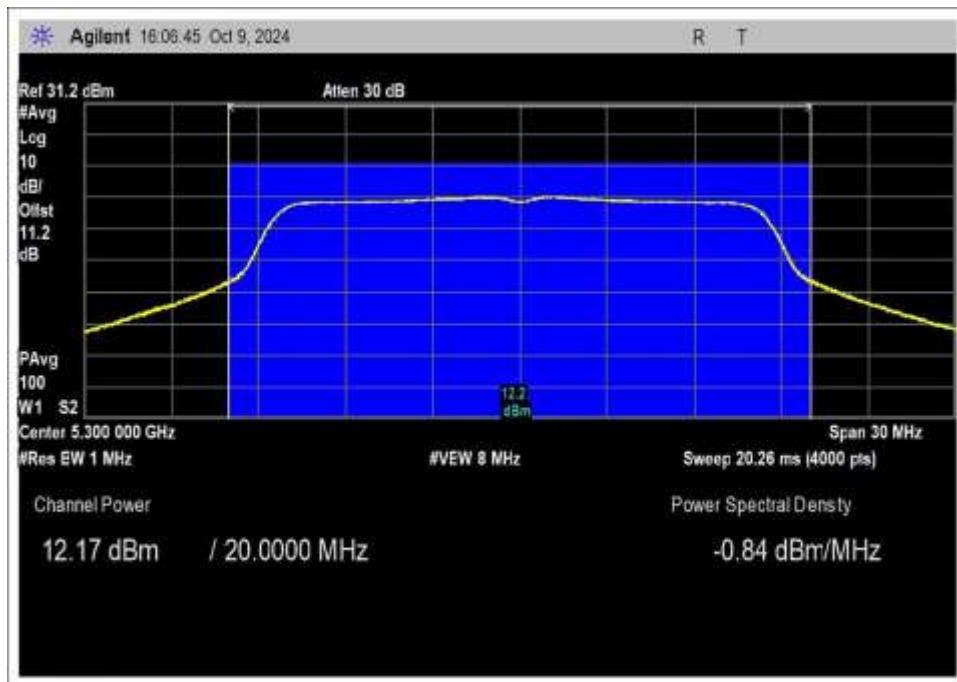Test Data – RF Conducted Measurement
Chain 0
802.11a

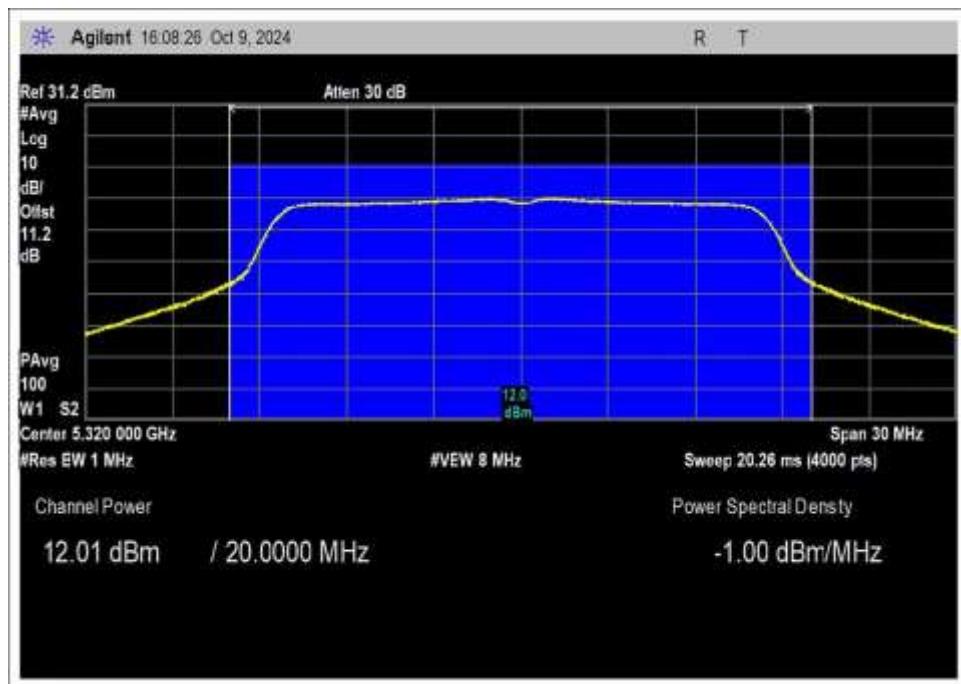Low Channel

Middle Channel

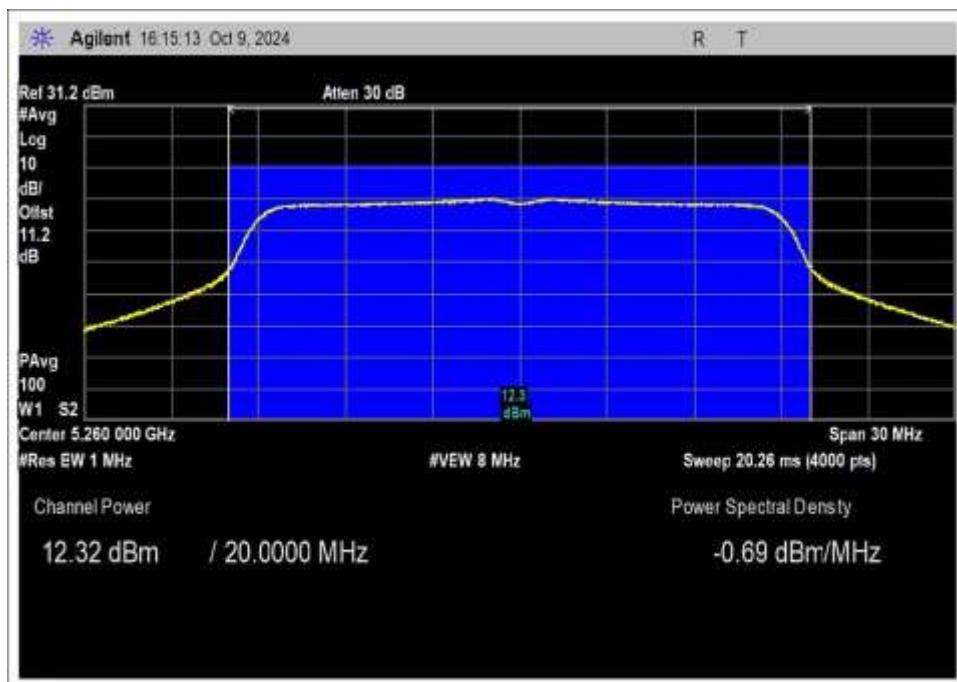


High Channel


802.11n HT20




Low Channel

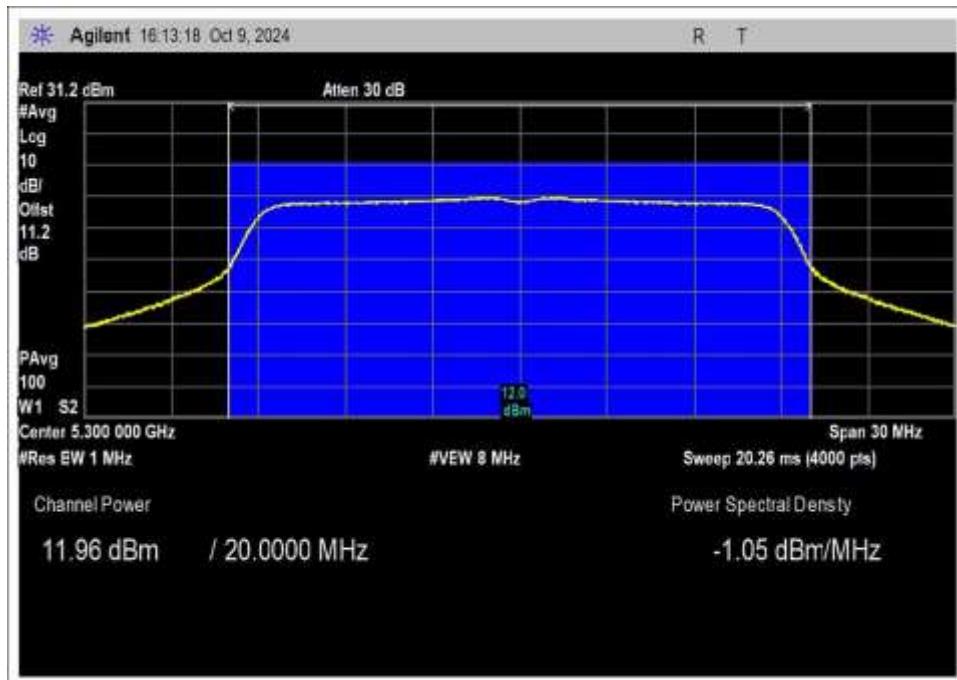


Middle Channel

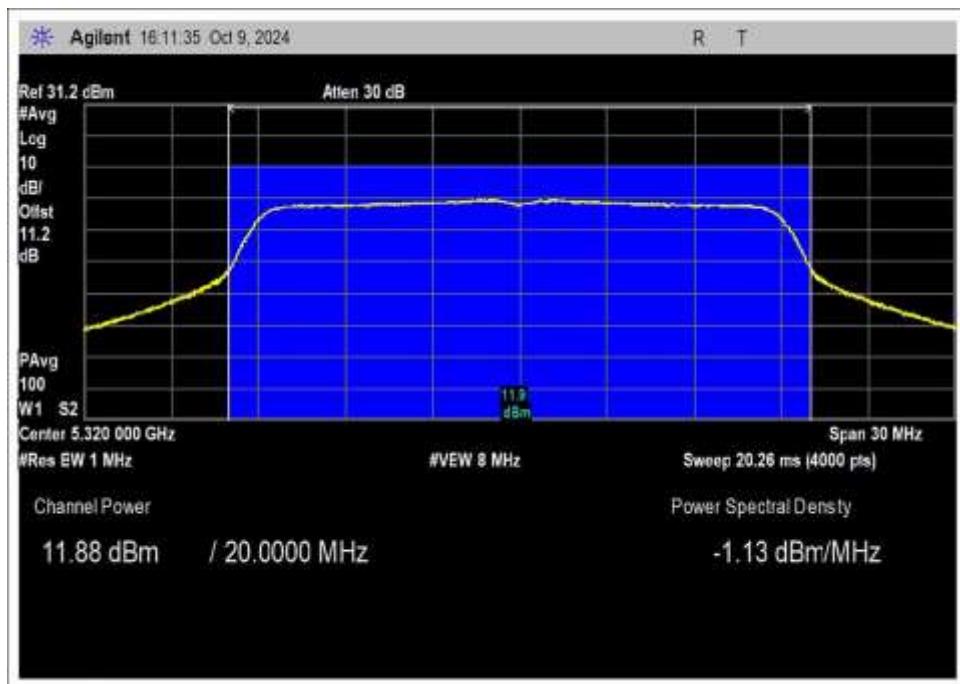


High Channel

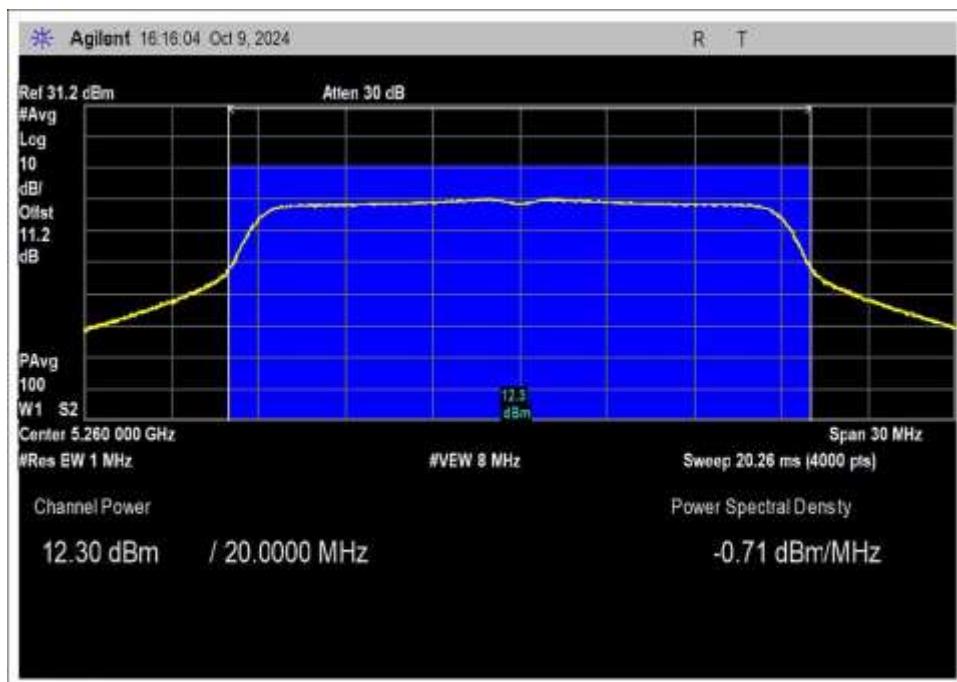802.11ac 20MHz


Low Channel

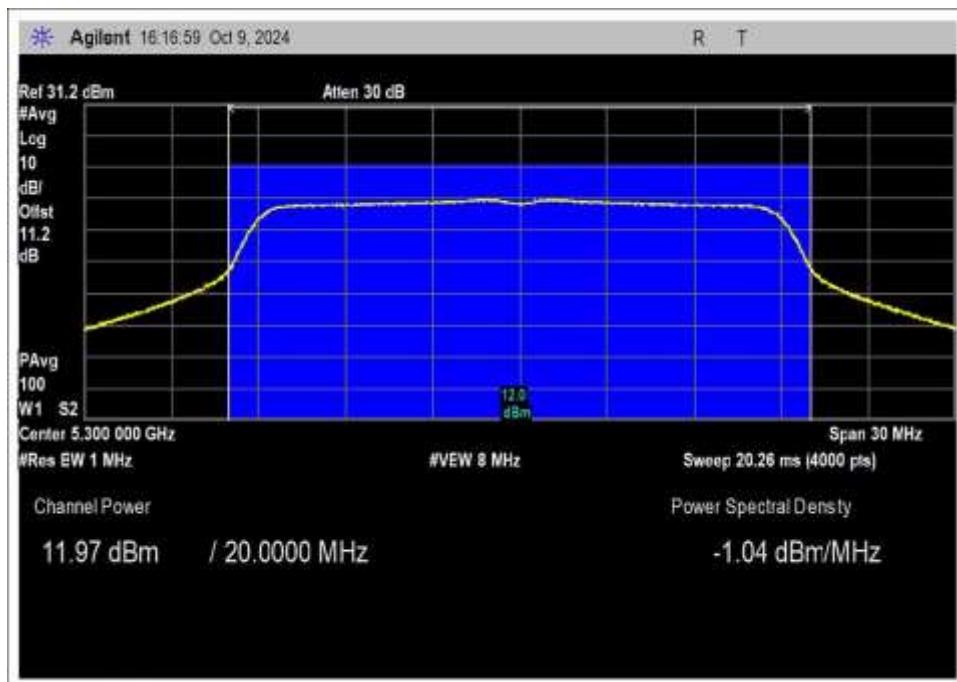


Middle Channel

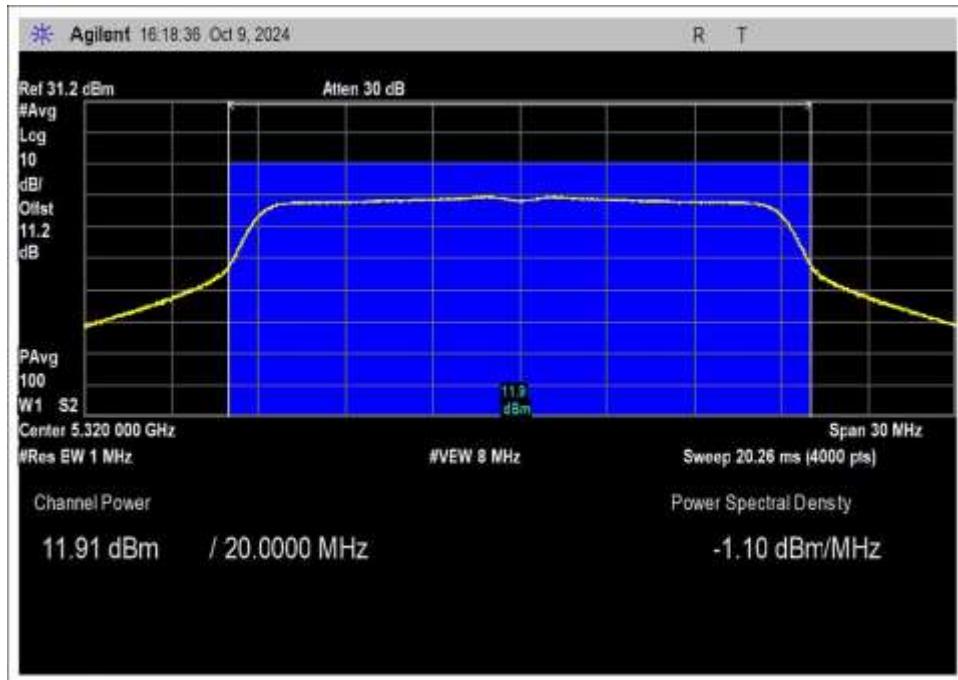


High Channel


802.11 n HT40

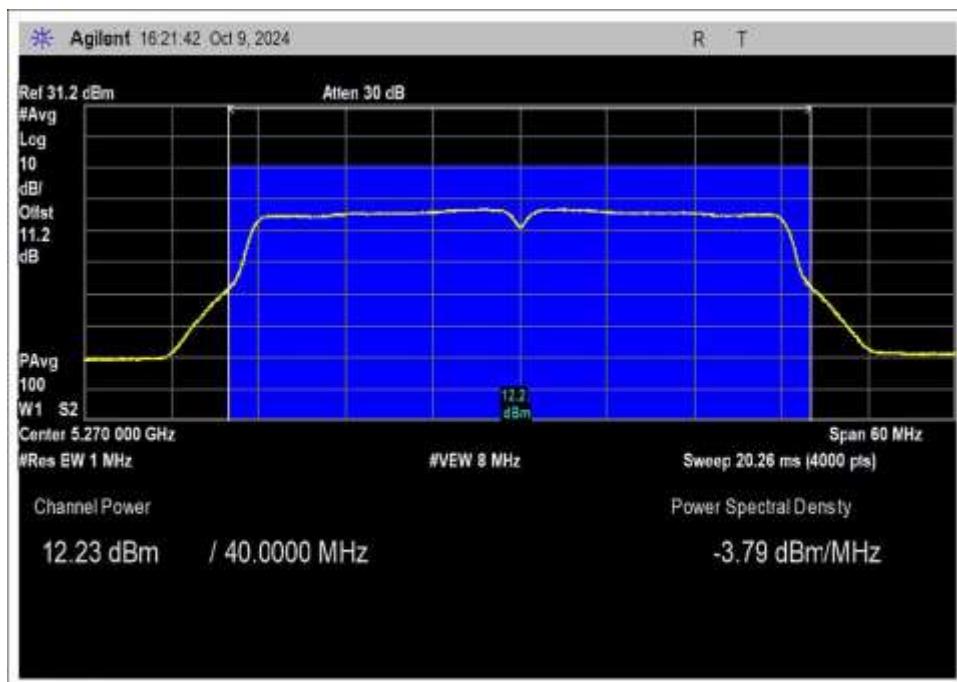


Low Channel

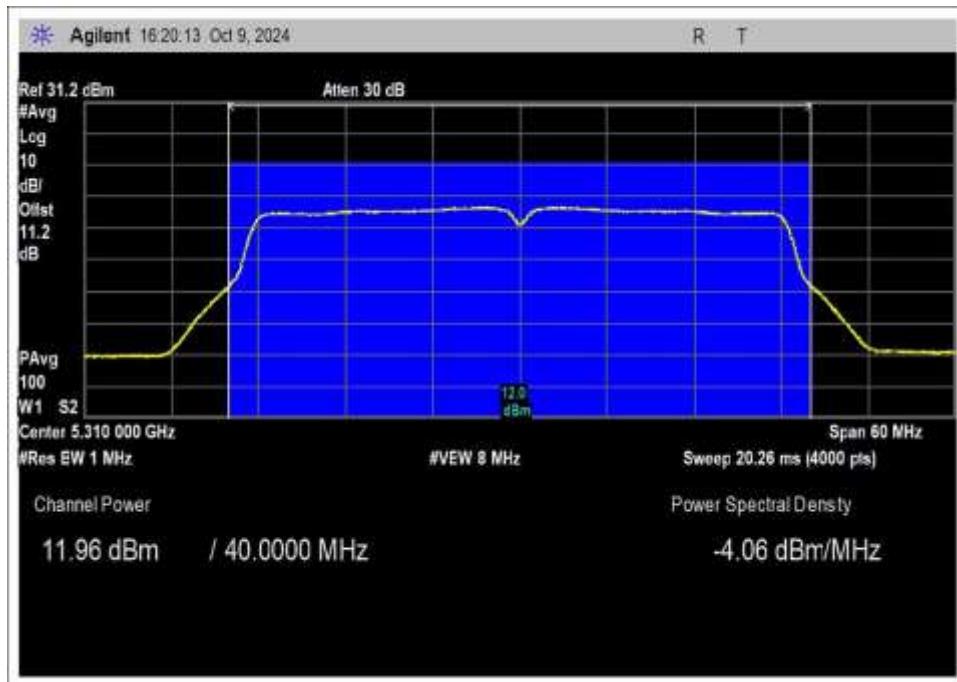

High Channel

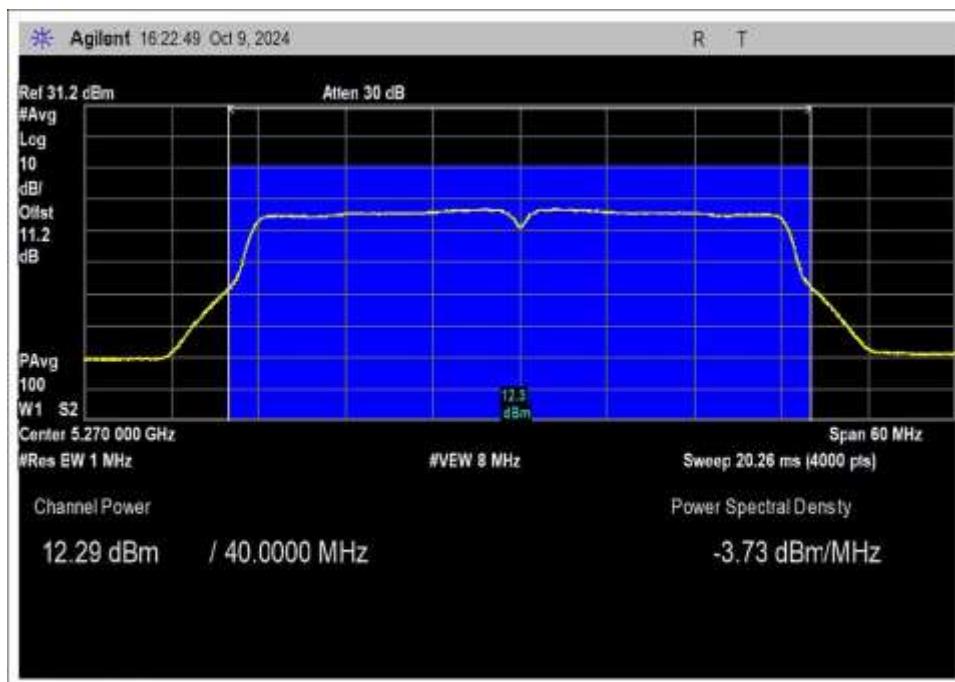
802.11ac 40MHz


Low Channel

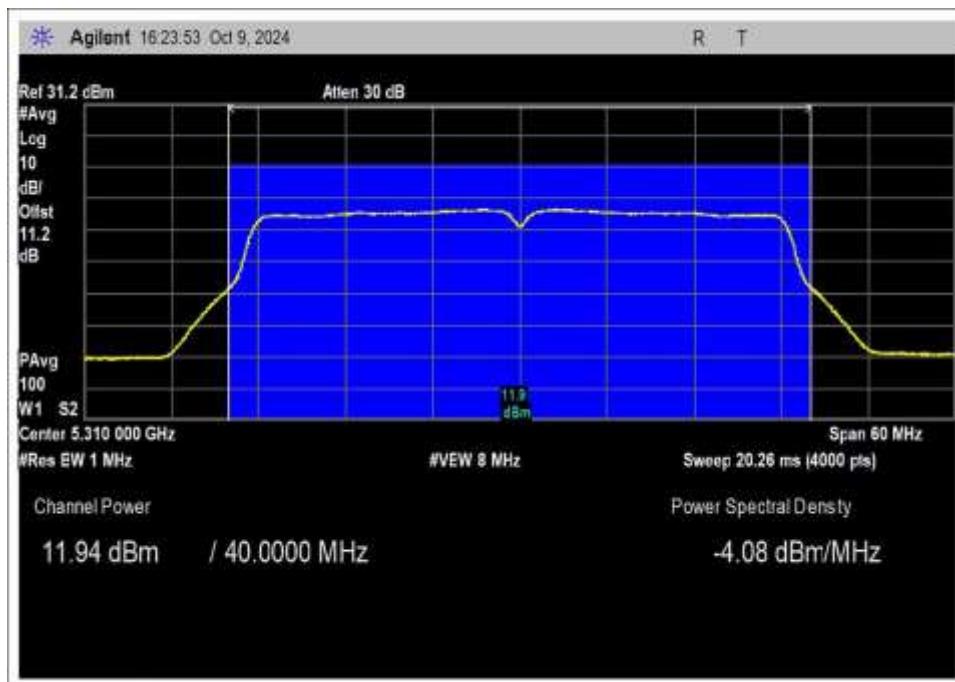


High Channel


802.11ac 80MHz

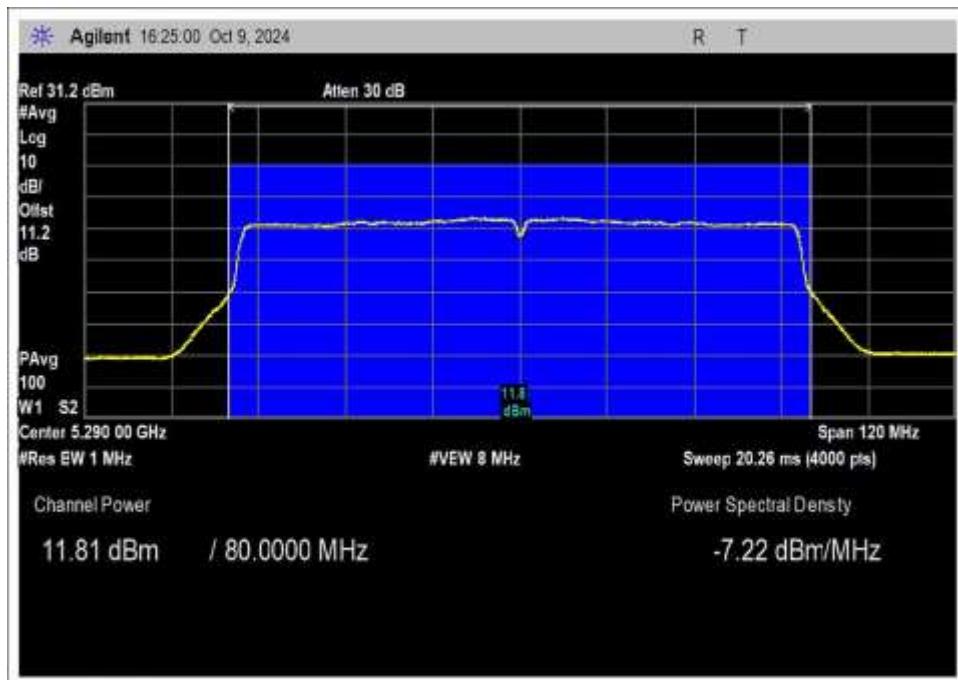


Chain 1
802.11a

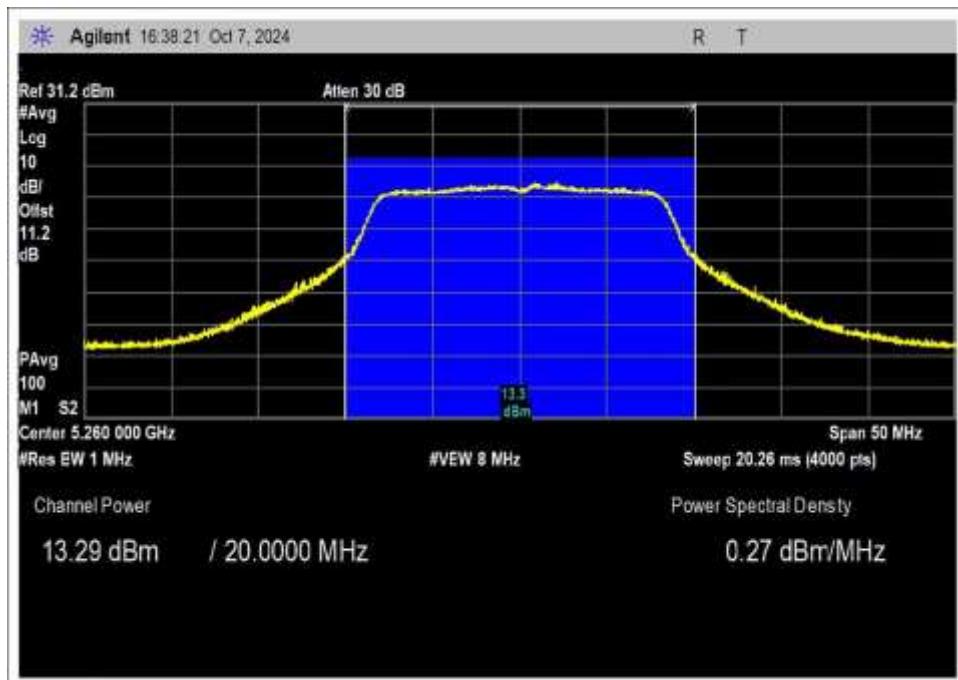

Low Channel

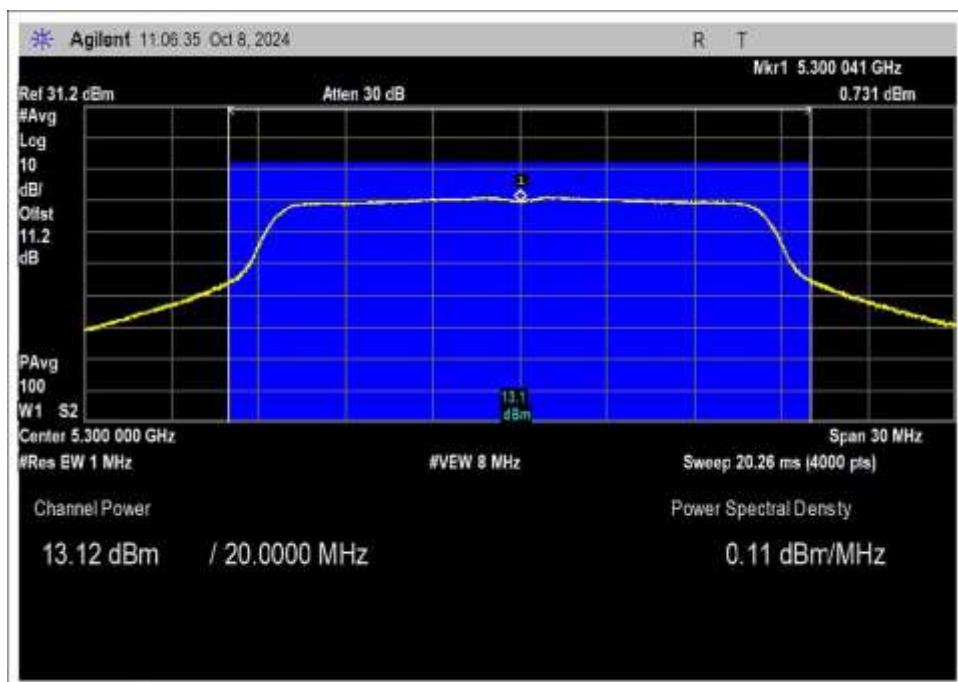


Middle Channel

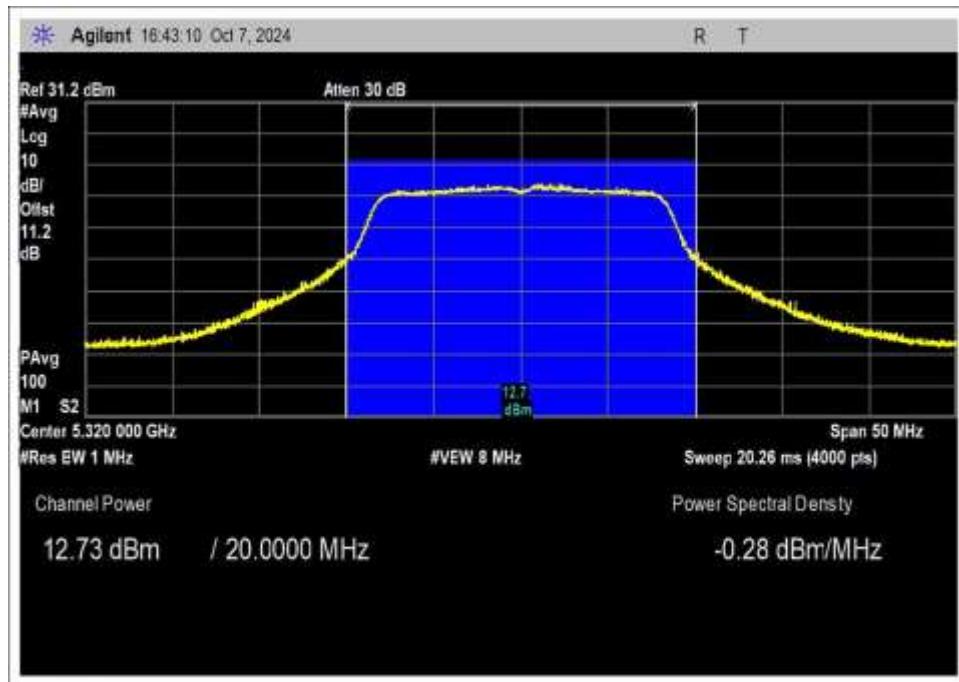


High Channel


802.11n HT20

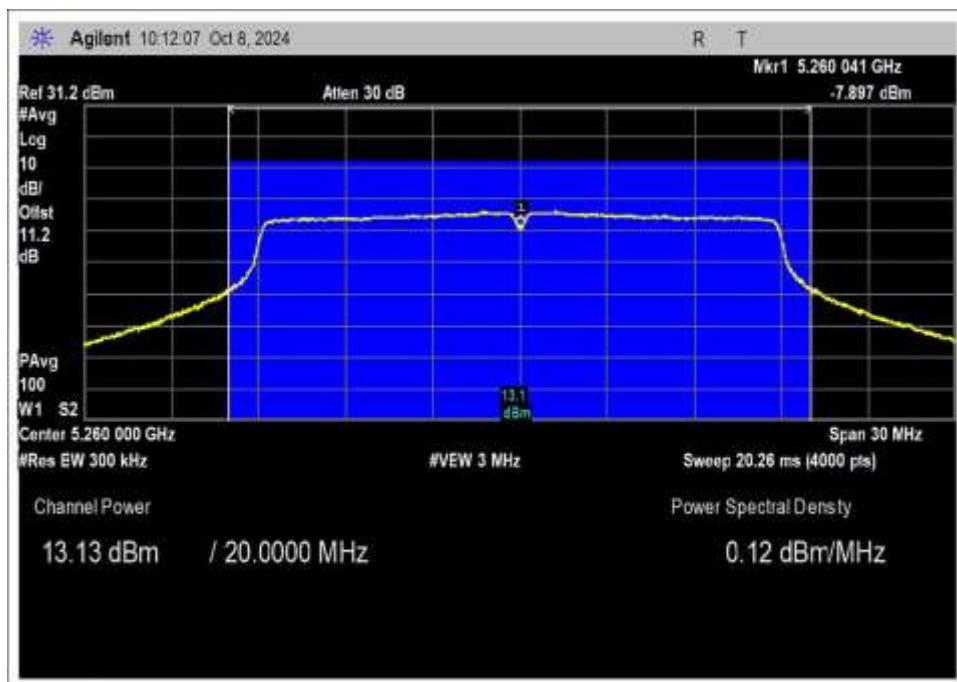


Low Channel

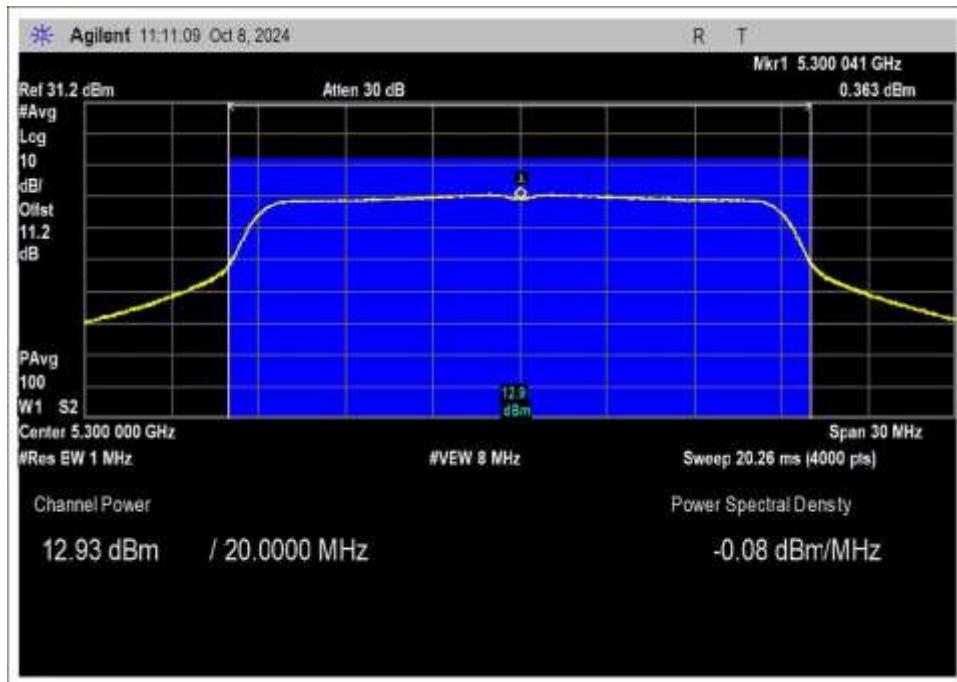


Middle Channel

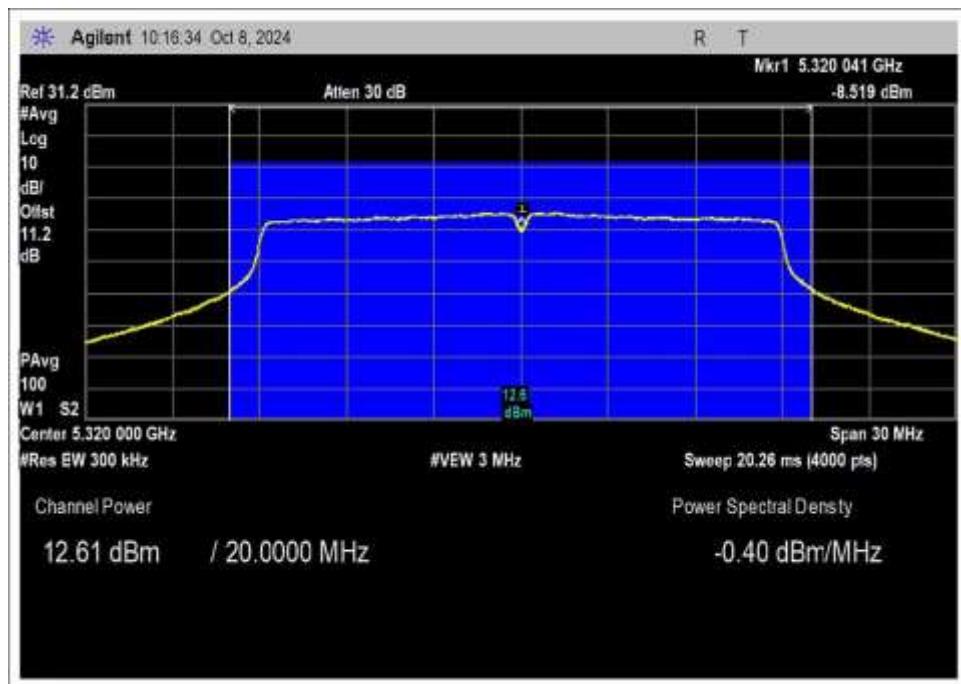


High Channel

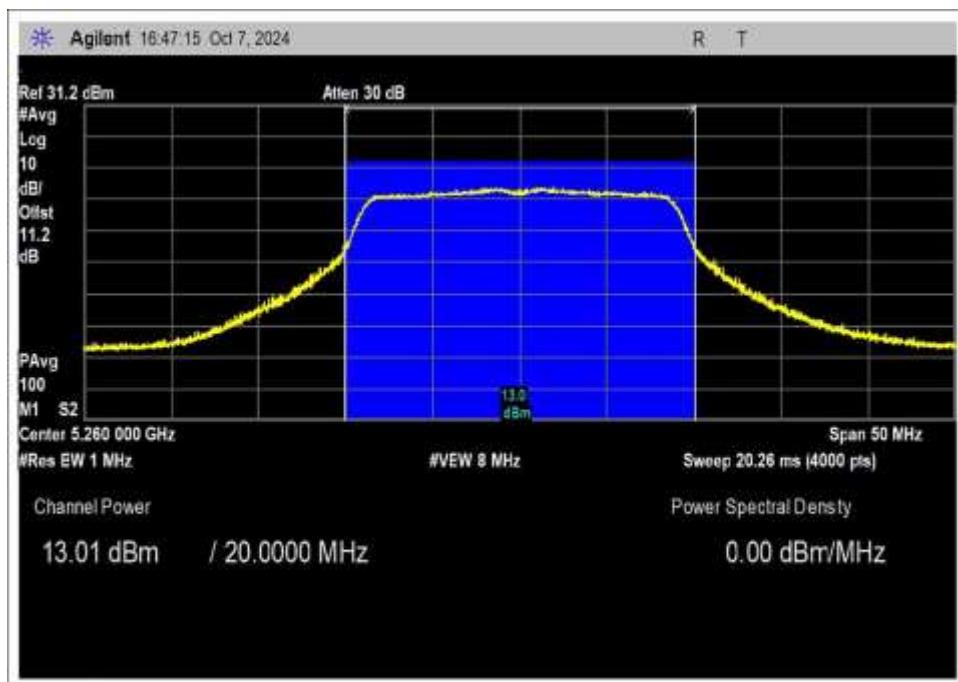802.11ac 20MHz


Low Channel

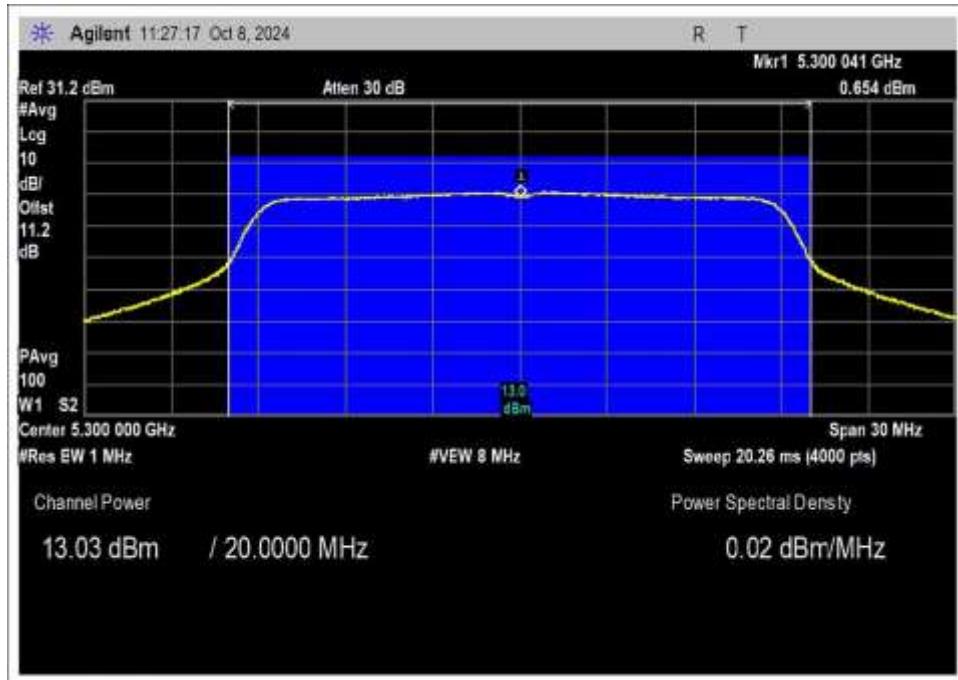


Middle Channel

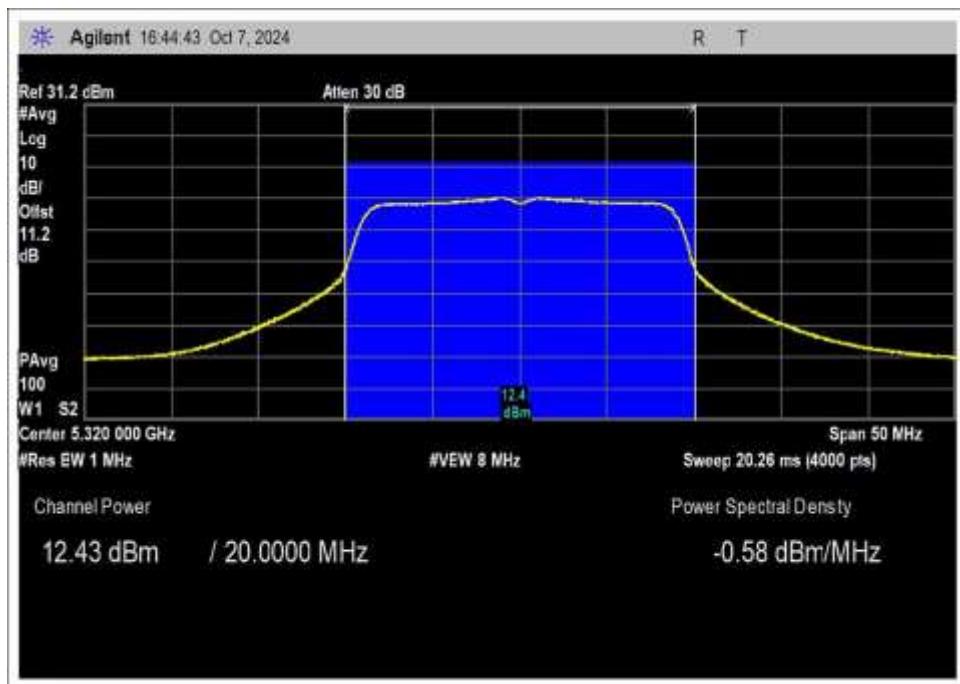


High Channel


802.11 n HT40

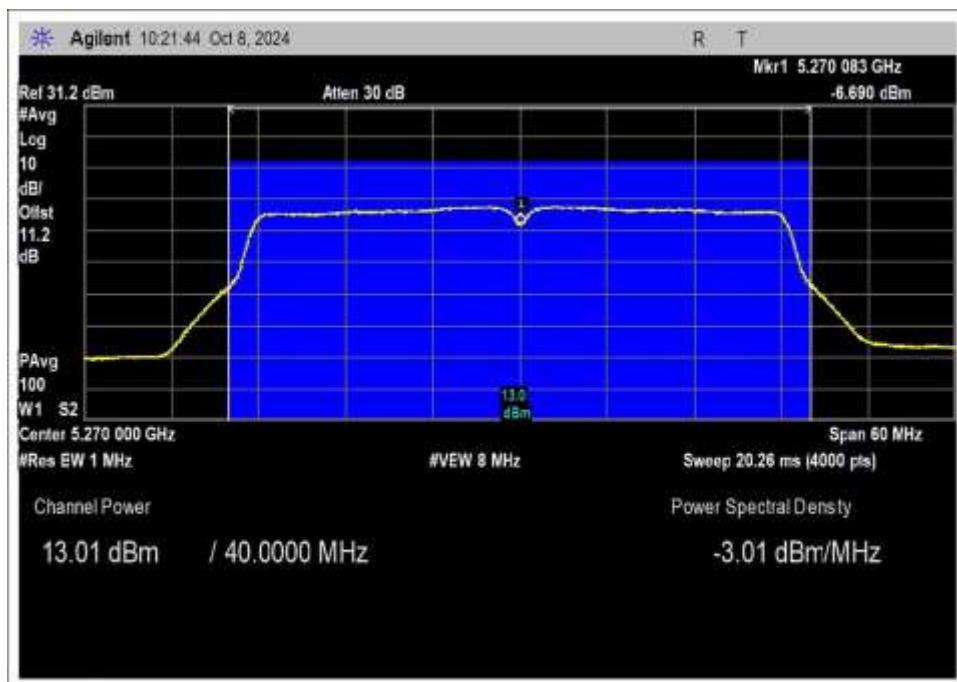


Low Channel

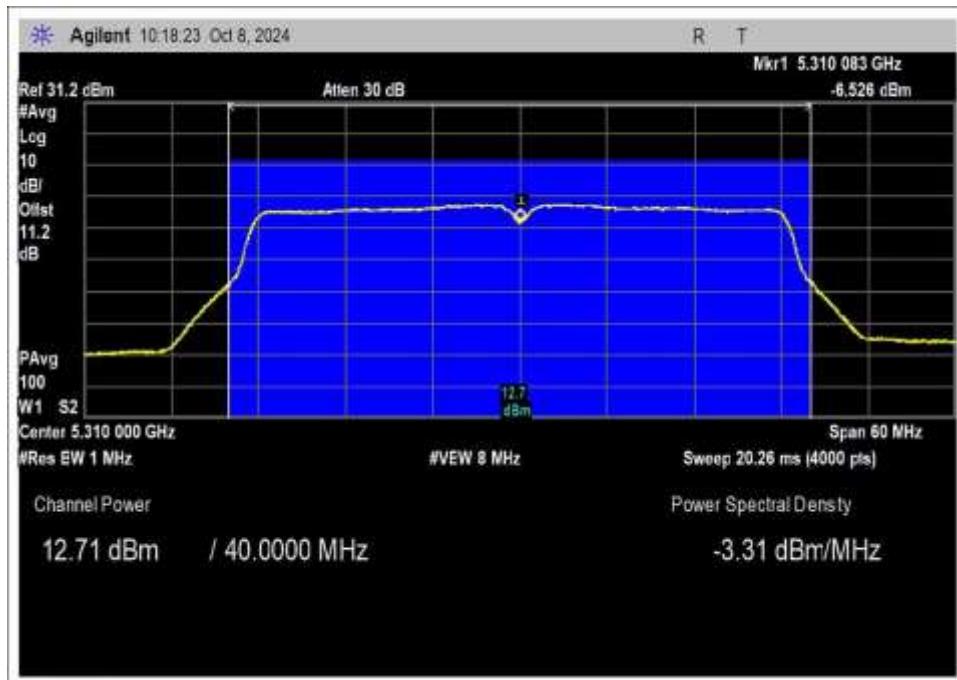

High Channel

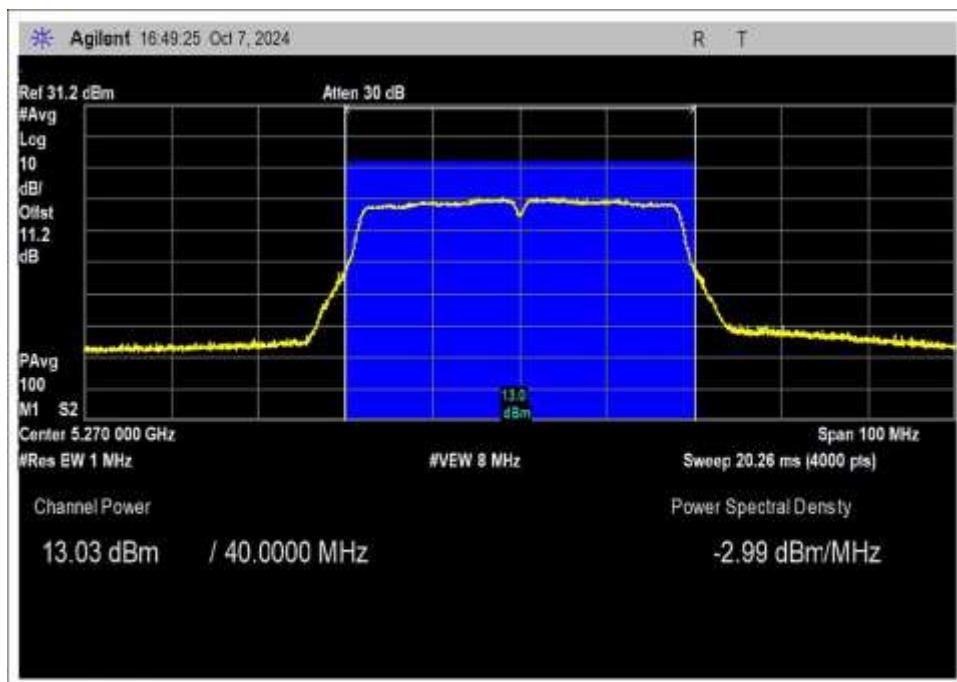
802.11ac 40MHz


Low Channel

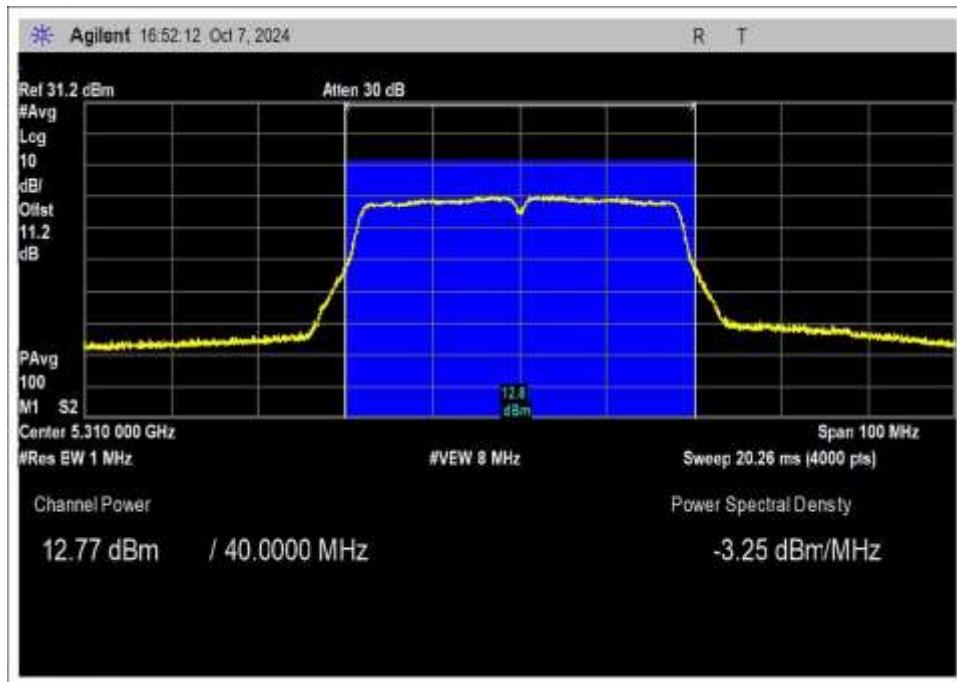

High Channel

802.11ac 80MHz

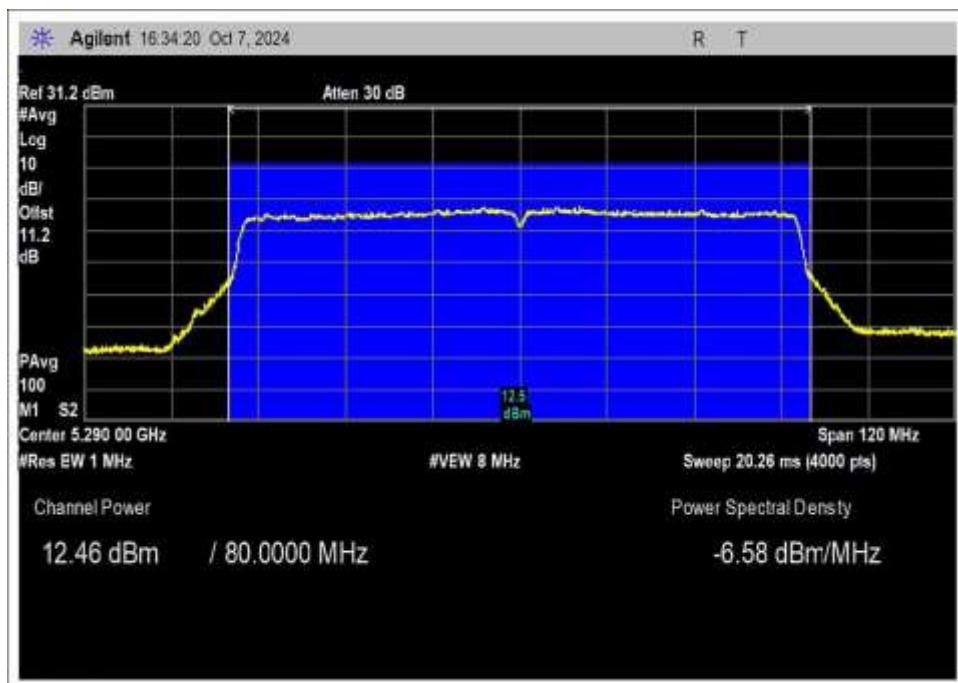

Test Setup Photo(s) - RF Conducted Measurement



Test Setup



Test Setup, Close View

15.407(b) Radiated Emissions & Band Edge

Test Setup/Conditions			
Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/24-25/2024 and 11/01-03/2024
Configuration:	1		
Note	1: Perform Radiated Emission on the Chain 0 only since Chain 0 is the worst case based on the investigation on RF output power for the band edge before measuring Radiated Spurious Emission. 2: The maximum emission is measured close to band edge. The emission at band edge is below limit as indicated in the plots below.		

Environmental Conditions			
Temperature (°C)	21.3-23.5	Relative Humidity (%):	39-48

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **110285** Date: 11/6/2024
 Test Type: **Radiated Scan** Time: 16:16:14
 Tested By: Hieu Song Nguyenpham Sequence#: 152
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020), KDB 789033 The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14 with duty cycle at 100%.

802.11a (18Mbps)-OFDM-5300MHz-Middle Channel

MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data.

Chain 0

Operational mode is representative of worst case.

No emissions from EUT has been found in 20dB tolerance in the frequency range 9kHz to 30MHz.

Modification #1 was in place during testing.



Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07508	Preamp	310N	4/5/2024	4/5/2026
	AN00432	Loop Antenna	6502	7/10/2023	7/10/2025
T2	AN01995	Biconilog Antenna	CBL6111C	5/16/2024	5/16/2026
T3	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T4	ANP01187	Cable	CNT-195	7/3/2024	7/3/2026
T5	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5				Table	dB μ V/m	dB μ V/m		
			MHz	dB μ V	dB	dB	dB	Table	dB μ V/m	dB	Ant
1	312.012M	54.1	-31.9	+19.4	+1.8	+0.5	+0.0	44.5	46.0	-1.5	Horiz
	QP		+0.6								
^	312.012M	54.8	-31.9	+19.4	+1.8	+0.5	+0.0	45.2	46.0	-0.8	Horiz
			+0.6								
3	503.996M	46.6	-32.0	+24.5	+2.3	+0.7	+0.0	42.9	46.0	-3.1	Horiz
			+0.8								
4	456.068M	47.3	-32.0	+23.4	+2.2	+0.7	+0.0	42.4	46.0	-3.6	Horiz
			+0.8								
5	162.014M	47.9	-32.0	+16.5	+1.2	+0.3	+0.0	34.3	43.5	-9.2	Vert
			+0.4								
6	113.966M	46.1	-32.0	+17.3	+1.0	+0.3	+0.0	33.1	43.5	-10.4	Vert
			+0.4								
7	497.990M	39.0	-32.0	+24.3	+2.3	+0.7	+0.0	35.1	46.0	-10.9	Vert
			+0.8								



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
Work Order #: **110285** Date: 11/6/2024
Test Type: **Radiated Scan** Time: 09:45:55
Tested By: Hieu Song Nguyenpham Sequence#: 135
Software: EMITest 5.03.20

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 1GHz to 40GHz
Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa
Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020), KDB 789033
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14
802.11a-OFDM-5.2GHz Band MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data. Chain 0 Operational mode is representative of worst case. Low Channel
Modification #1 was in place during testing.

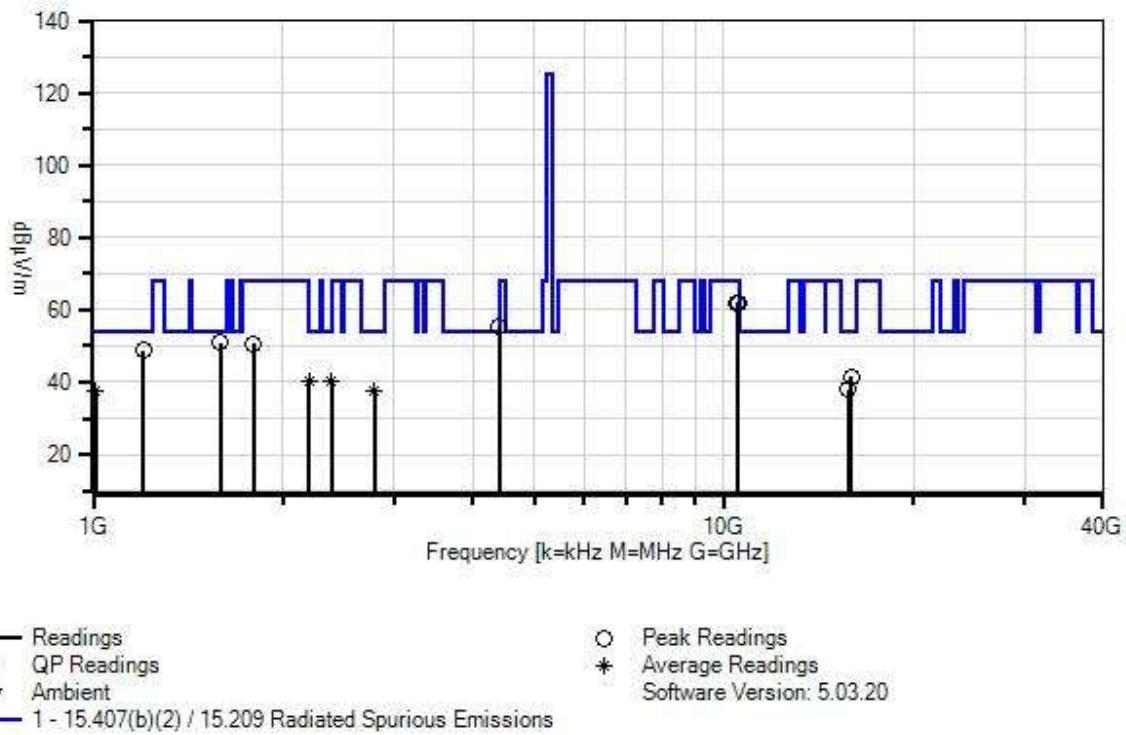Tonal WO#: 110285 Sequence#: 135 Date: 11/6/2024
 15.407(b)(2) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K- 29094K-120TC	8/16/2024	8/16/2026
T7	AN02693	Active Horn Antenna	AMFW-5F- 12001800-20- 10P	1/9/2024	1/9/2026
	AN02694	Horn Antenna	AMFW-5F- 18002650-20- 10P	1/9/2024	1/9/2026
T8	ANP00928	Cable	various	1/26/2024	1/26/2026



	ANP00929	Cable	various	1/26/2024	1/26/2026
T9	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T10	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	Ant
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	1592.000M	39.3	+26.1	+1.1	+2.0	-28.0	+0.0	51.0	54.0	-3.0	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
2	1200.000M	39.4	+24.8	+0.9	+1.7	-28.5	+0.0	48.8	54.0	-5.2	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
3	10517.950M	31.2	+39.4	+3.2	+5.8	-29.4	+0.0	61.9	68.2	-6.3	Horiz
			+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
4	10525.500M	30.9	+39.4	+3.2	+5.8	-29.4	+0.0	61.6	68.2	-6.6	Vert
			+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
5	15930.000M	46.2	+0.0	+0.0	+0.0	+0.0	+0.0	41.5	54.0	-12.5	Vert
			+0.0	+5.7	-14.2	+0.5					
			+3.3	+0.0							
6	4406.000M	32.9	+32.5	+1.9	+3.5	-26.4	+0.0	55.5	68.2	-12.7	Vert
			+1.1	+0.0	+0.0	+0.0					
			+0.0	+10.0							
7	2390.000M Ave	24.7	+28.3	+1.3	+2.5	-27.1	+0.0	40.4	54.0	-13.6	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	2390.000M	45.8	+28.3	+1.3	+2.5	-27.1	+0.0	61.5	54.0	+7.5	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
9	2200.000M Ave	24.7	+28.2	+1.3	+2.4	-27.2	+0.0	40.1	54.0	-13.9	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	2200.000M	47.1	+28.2	+1.3	+2.4	-27.2	+0.0	62.5	54.0	+8.5	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
11	15771.000M	42.7	+0.0	+0.0	+0.0	+0.0	+0.0	38.1	54.0	-15.9	Horiz
			+0.0	+5.6	-14.1	+0.6					
			+3.3	+0.0							
12	1010.000M Ave	29.1	+24.2	+1.0	+1.6	-28.7	+0.0	37.6	54.0	-16.4	Vert
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
^	1010.000M	48.4	+24.2	+1.0	+1.6	-28.7	+0.0	56.9	54.0	+2.9	Vert
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
14	2798.000M Ave	19.9	+29.4	+1.5	+2.7	-26.8	+0.0	37.4	54.0	-16.6	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	2798.000M	38.3	+29.4	+1.5	+2.7	-26.8	+0.0	55.8	54.0	+1.8	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							



16	1796.000M	37.2	+27.2	+1.2	+2.1	-27.7	+0.0	50.6	68.2	-17.6	Horiz
			+0.7	+0.0	+0.0	+0.0					
			+0.0	+9.9							



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
Work Order #: **110285** Date: 11/6/2024
Test Type: **Radiated Scan** Time: 10:07:33
Tested By: Hieu Song Nguyenpham Sequence#: 136
Software: EMITest 5.03.20

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 1GHz to 40GHz
Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa
Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020), KDB 789033
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14
802.11a-OFDM-5.2GHz Band MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data. Chain 0 Operational mode is representative of worst case. Middle Channel
Modification #1 was in place during testing.

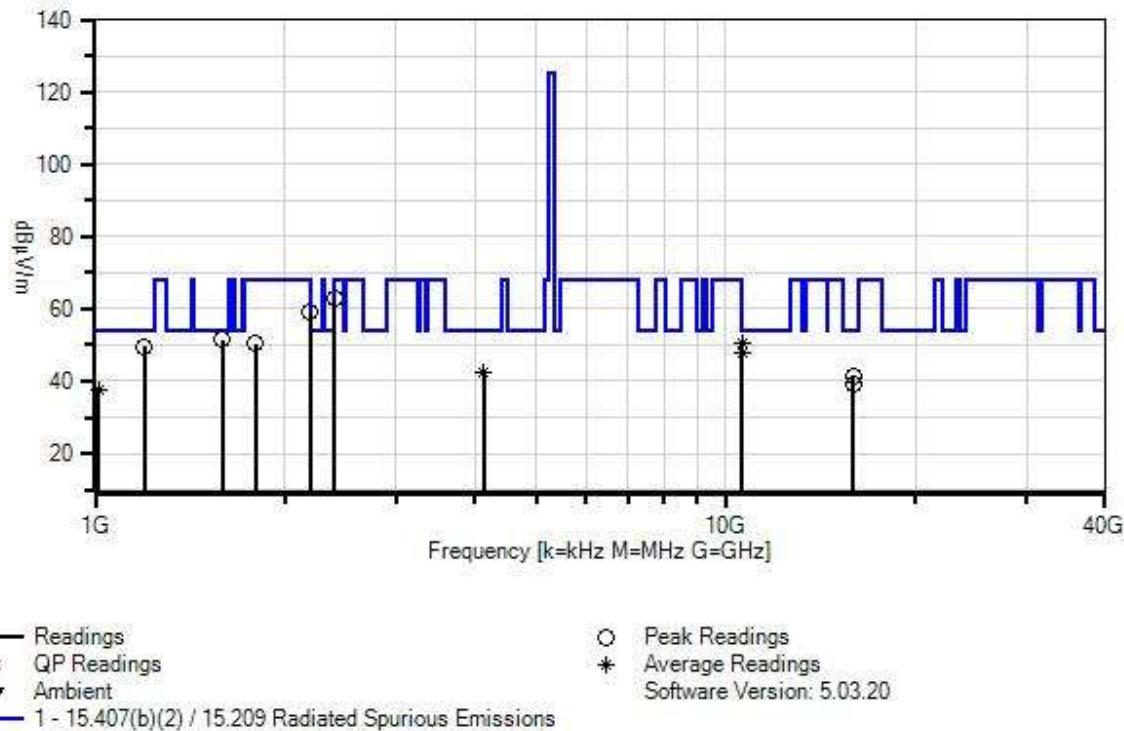Tonal WO#: 110285 Sequence#: 136 Date: 11/6/2024
 15.407(b)(2) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K- 29094K-120TC	8/16/2024	8/16/2026
T7	AN02693	Active Horn Antenna	AMFW-5F- 12001800-20- 10P	1/9/2024	1/9/2026
	AN02694	Horn Antenna	AMFW-5F- 18002650-20- 10P	1/9/2024	1/9/2026

T8	ANP00928	Cable	various	1/26/2024	1/26/2026
	ANP00929	Cable	various	1/26/2024	1/26/2026
T9	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T10	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	Ant
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	1594.000M	39.7	+26.1	+1.1	+2.0	-28.0	+0.0	51.4	54.0	-2.6	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
2	10601.100	20.1	+39.4	+3.2	+5.8	-29.5	+0.0	50.7	54.0	-3.3	Horiz
	M		+1.7	+0.0	+0.0	+0.0					
	Ave		+0.0	+10.0							
^	10601.100	33.6	+39.4	+3.2	+5.8	-29.5	+0.0	64.2	54.0	+10.2	Horiz
	M		+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
4	1196.000M	40.1	+24.8	+0.9	+1.7	-28.5	+0.0	49.5	54.0	-4.5	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
5	2396.000M	47.0	+28.3	+1.3	+2.5	-27.1	+0.0	62.7	68.2	-5.5	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
6	10603.250	17.4	+39.4	+3.2	+5.8	-29.5	+0.0	48.0	54.0	-6.0	Vert
	M		+1.7	+0.0	+0.0	+0.0					
	Ave		+0.0	+10.0							
^	10603.250	31.0	+39.4	+3.2	+5.8	-29.5	+0.0	61.6	54.0	+7.6	Vert
	M		+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
8	2194.000M	43.5	+28.2	+1.3	+2.4	-27.2	+0.0	58.9	68.2	-9.3	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
9	4134.000M	20.6	+32.4	+1.8	+3.3	-26.5	+0.0	42.5	54.0	-11.5	Vert
	Ave		+1.0	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	4134.000M	34.3	+32.4	+1.8	+3.3	-26.5	+0.0	56.2	54.0	+2.2	Vert
			+1.0	+0.0	+0.0	+0.0					
			+0.0	+9.9							
11	15930.000	46.2	+0.0	+0.0	+0.0	+0.0	+0.0	41.5	54.0	-12.5	Vert
	M		+0.0	+5.7	-14.2	+0.5					
			+3.3	+0.0							
12	15951.000	43.7	+0.0	+0.0	+0.0	+0.0	+0.0	39.0	54.0	-15.0	Horiz
	M		+0.0	+5.7	-14.2	+0.5					
			+3.3	+0.0							
13	1012.000M	28.9	+24.2	+1.0	+1.6	-28.7	+0.0	37.4	54.0	-16.6	Vert
	Ave		+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
^	1012.000M	48.0	+24.2	+1.0	+1.6	-28.7	+0.0	56.5	54.0	+2.5	Vert
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
15	1796.000M	37.1	+27.2	+1.2	+2.1	-27.7	+0.0	50.5	68.2	-17.7	Horiz
			+0.7	+0.0	+0.0	+0.0					
			+0.0	+9.9							



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
Work Order #: **110285** Date: 11/6/2024
Test Type: **Radiated Scan** Time: 10:19:36
Tested By: Hieu Song Nguyenpham Sequence#: 137
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 1GHz to 40GHz
Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa
Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020), KDB 789033
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14
802.11a-OFDM-5.2GHz Band MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data. Chain 0 Operational mode is representative of worst case. High Channel

Modification #1 was in place during testing.

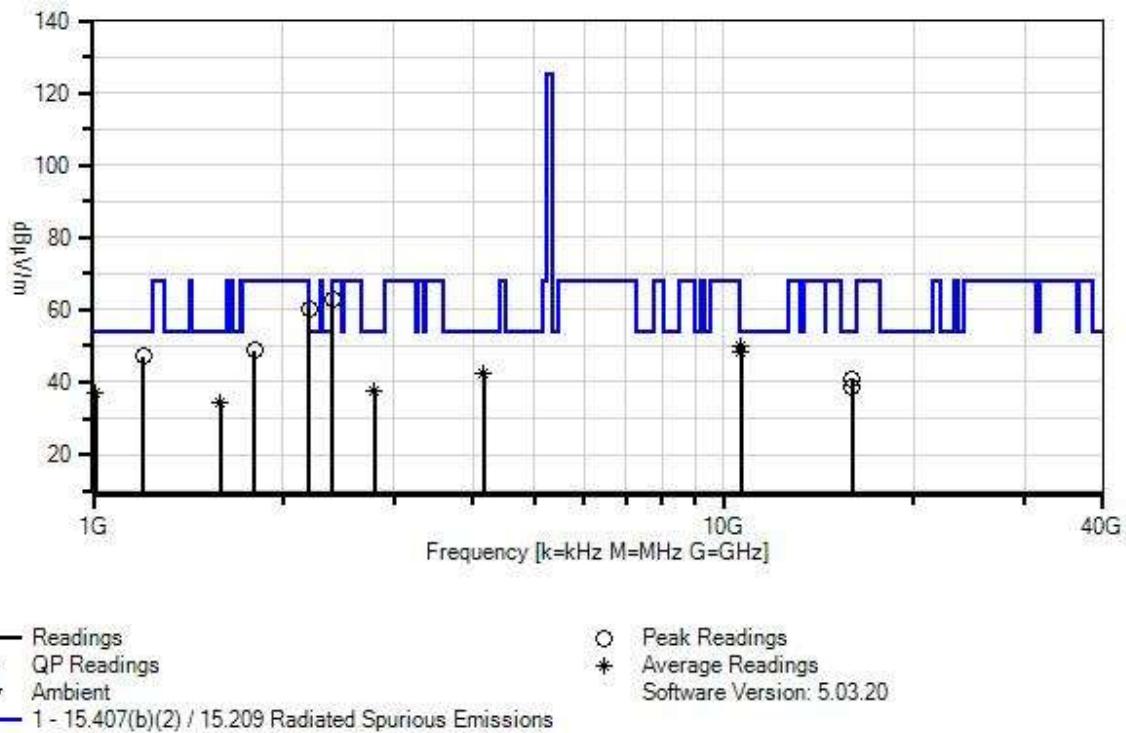Tonal WO#: 110285 Sequence#: 137 Date: 11/6/2024
 15.407(b)(2) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K- 29094K-120TC	8/16/2024	8/16/2026
T7	AN02693	Active Horn Antenna	AMFW-5F- 12001800-20- 10P	1/9/2024	1/9/2026
	AN02694	Horn Antenna	AMFW-5F- 18002650-20- 10P	1/9/2024	1/9/2026
T8	ANP00928	Cable	various	1/26/2024	1/26/2026



	ANP00929	Cable	various	1/26/2024	1/26/2026
T9	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T10	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8	Table	dB μ V/m	dB μ V/m	dB	Ant
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	10640.000	19.4	+39.4	+3.2	+5.9	-29.5	+0.0	50.1	54.0	-3.9	Horiz
	M		+1.7	+0.0	+0.0	+0.0					
	Ave		+0.0	+10.0							
^	10640.000	31.9	+39.4	+3.2	+5.9	-29.5	+0.0	62.6	54.0	+8.6	Horiz
	M		+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
3	2394.000M	47.2	+28.3	+1.3	+2.5	-27.1	+0.0	62.9	68.2	-5.3	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
4	10640.000	17.4	+39.4	+3.2	+5.9	-29.5	+0.0	48.1	54.0	-5.9	Vert
	M		+1.7	+0.0	+0.0	+0.0					
	Ave		+0.0	+10.0							
^	10640.000	30.5	+39.4	+3.2	+5.9	-29.5	+0.0	61.2	54.0	+7.2	Vert
	M		+1.7	+0.0	+0.0	+0.0					
			+0.0	+10.0							
6	1200.000M	37.8	+24.8	+0.9	+1.7	-28.5	+0.0	47.2	54.0	-6.8	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
7	2198.000M	44.9	+28.2	+1.3	+2.4	-27.2	+0.0	60.3	68.2	-7.9	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
8	4166.000M	20.6	+32.4	+1.8	+3.4	-26.5	+0.0	42.6	54.0	-11.4	Vert
	Ave		+1.0	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	4166.000M	33.5	+32.4	+1.8	+3.4	-26.5	+0.0	55.5	54.0	+1.5	Vert
			+1.0	+0.0	+0.0	+0.0					
			+0.0	+9.9							
10	15981.000	45.4	+0.0	+0.0	+0.0	+0.0	+0.0	40.6	54.0	-13.4	Vert
	M		+0.0	+5.7	-14.3	+0.5					
			+3.3	+0.0							
11	15975.000	43.4	+0.0	+0.0	+0.0	+0.0	+0.0	38.6	54.0	-15.4	Horiz
	M		+0.0	+5.7	-14.3	+0.5					
			+3.3	+0.0							
12	2798.000M	20.0	+29.4	+1.5	+2.7	-26.8	+0.0	37.5	54.0	-16.5	Vert
	Ave		+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	2798.000M	38.3	+29.4	+1.5	+2.7	-26.8	+0.0	55.8	54.0	+1.8	Vert
			+0.8	+0.0	+0.0	+0.0					
			+0.0	+9.9							
14	1010.000M	28.7	+24.2	+1.0	+1.6	-28.7	+0.0	37.2	54.0	-16.8	Vert
	Ave		+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
^	1010.000M	47.3	+24.2	+1.0	+1.6	-28.7	+0.0	55.8	54.0	+1.8	Vert
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							



16	1594.000M	22.9	+26.1	+1.1	+2.0	-28.0	+0.0	34.6	54.0	-19.4	Horiz
	Ave		+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	1594.000M	41.6	+26.1	+1.1	+2.0	-28.0	+0.0	53.3	54.0	-0.7	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
18	1800.000M	35.2	+27.2	+1.2	+2.2	-27.7	+0.0	48.7	68.2	-19.5	Horiz
			+0.7	+0.0	+0.0	+0.0					
			+0.0	+9.9							

Band Edge

Band Edge Summary-Chain 0

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Average (dBuV/m @3m)		Peak (dBuV/m @3m)		Results
			Measured	Limit	Measured	Limit	
5140.130*	802.11a	External/4.66	42.3	≤54	56.7	≤74	Pass
5440.000*	802.11a	External/4.66	44.4	≤54	59.8	≤74	Pass
5140.300*	802.11n HT20	External/4.66	42.7	≤54	57.2	≤74	Pass
5440.190*	802.11n HT20	External/4.66	44.9	≤54	61.6	≤74	Pass
5140.270*	802.11ac 20MHz	External/4.66	42.3	≤54	57.5	≤74	Pass
5440.400*	802.11ac 20MHz	External/4.66	43.6	≤54	58.4	≤74	Pass
5149.800*	802.11n HT40	External/4.66	46.1	≤54	67.4	≤74	Pass
5429.500*	802.11n HT40	External/4.66	42.8	≤54	61.1	≤74	Pass
5149.800*	802.11ac 40MHz	External/4.66	43.6	≤54	62.5	≤74	Pass
5429.800*	802.11ac 40MHz	External/4.66	44.1	≤54	62.9	≤74	Pass
5150.000*	802.11ac 80MHz	External/4.66	42.1	≤54	52.1	≤74	Pass
5709.900*	802.11ac 80MHz	External/4.66	46.3	≤54	65.3	≤74	Pass

*Restricted band edge



Band Edge Summary-Chain 1



Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Average (dBuV/m @3m)		Peak (dBuV/m @3m)		Results
			Measured	Limit	Measured	Limit	
5150*	802.11a	External/4.66	40.9	≤54	51.7	≤74	Pass
5350*	802.11a	External/4.66	44.6	≤54	54.4	≤74	Pass
5150*	802.11n HT20	External/4.66	41.1	≤54	50.8	≤74	Pass
5350*	802.11n HT20	External/4.66	46.5	≤54	55.7	≤74	Pass
5150*	802.11ac 20MHz	External/4.66	41.1	≤54	51.1	≤74	Pass
5350*	802.11ac 20MHz	External/4.66	45.2	≤54	54.9	≤74	Pass
5150*	802.11n HT40	External/4.66	40.9	≤54	52.2	≤74	Pass
5350*	802.11n HT40	External/4.66	49.4	≤54	60.7	≤74	Pass
5150*	802.11ac 40MHz	External/4.66	41.1	≤54	51.3	≤74	Pass
5350*	802.11ac 40MHz	External/4.66	49.7	≤54	60.6	≤74	Pass
5150*	802.11ac 80MHz	External/4.66	40.9	≤54	52.3	≤74	Pass
5350*	802.11ac 80MHz	External/4.66	49.9	≤54	61.8	≤74	Pass

*Restricted band edge



Band Edge Plots



Chain 0 802.11a

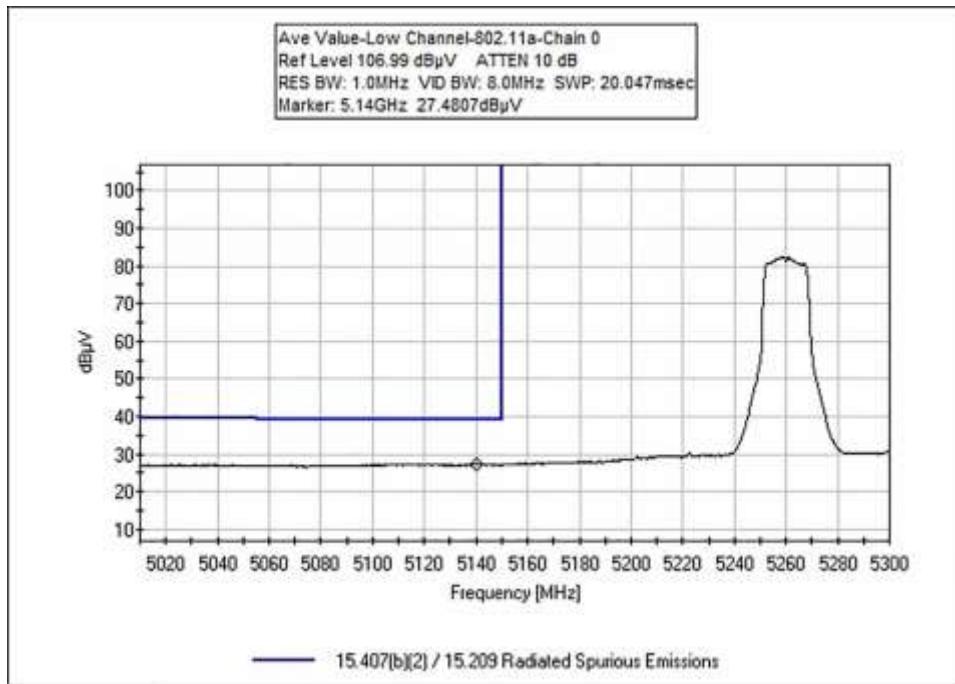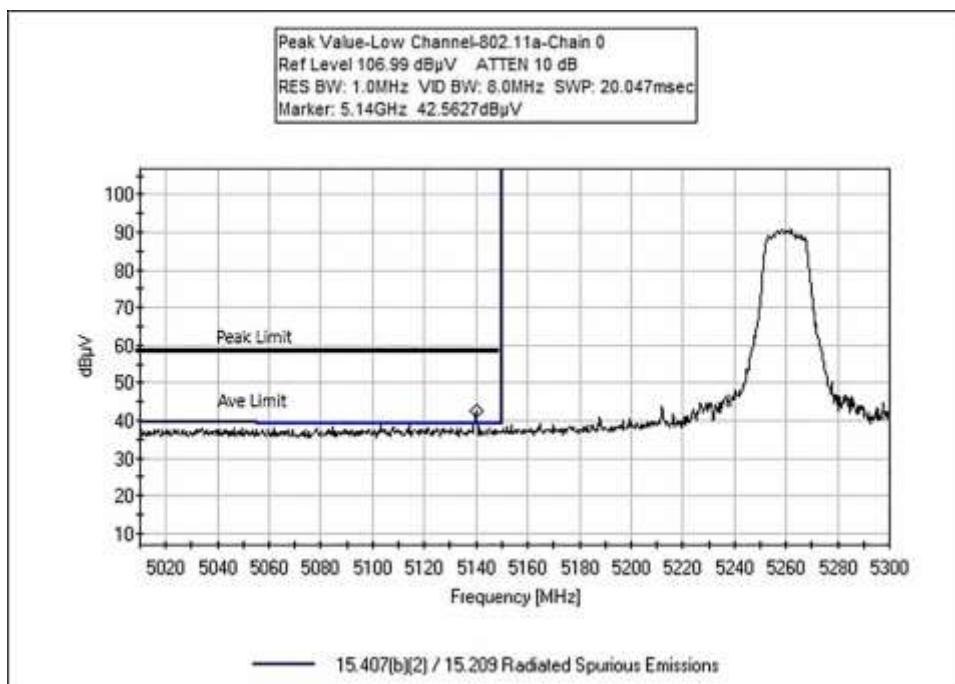

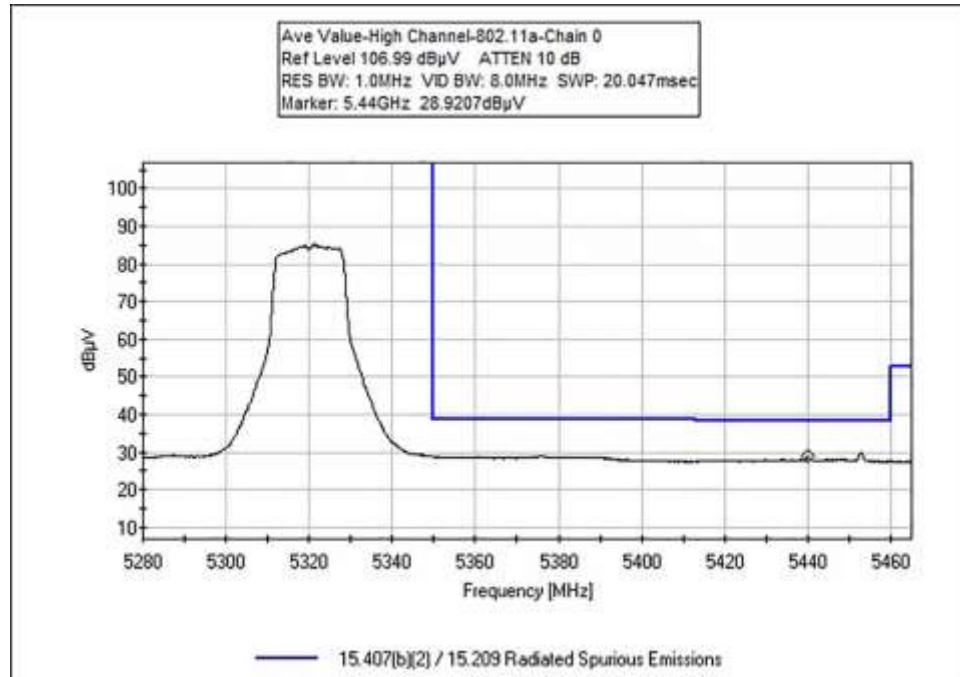
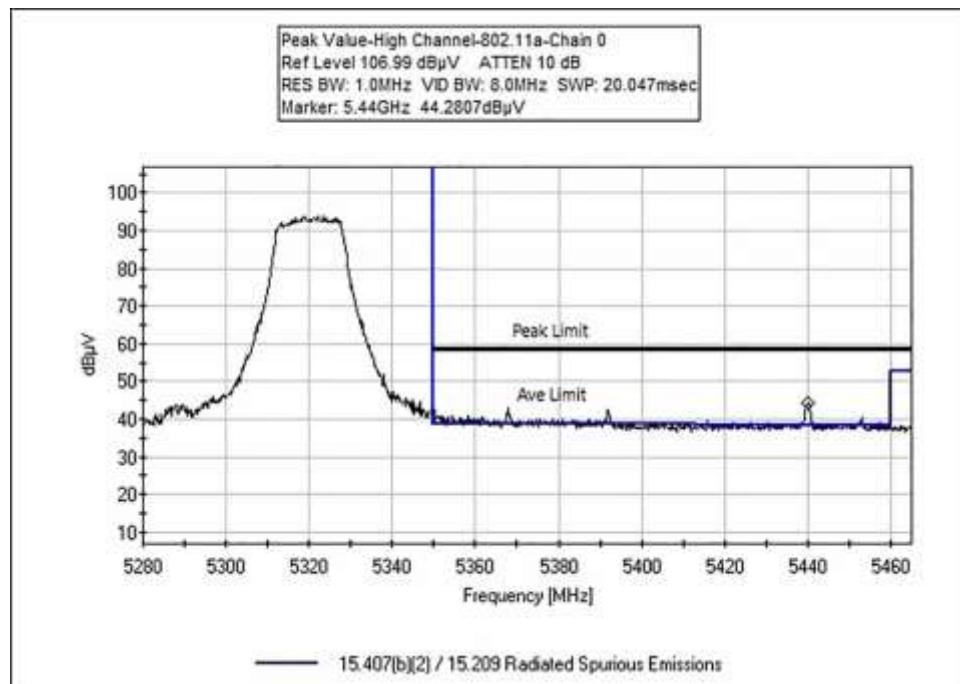




802.11n HT20

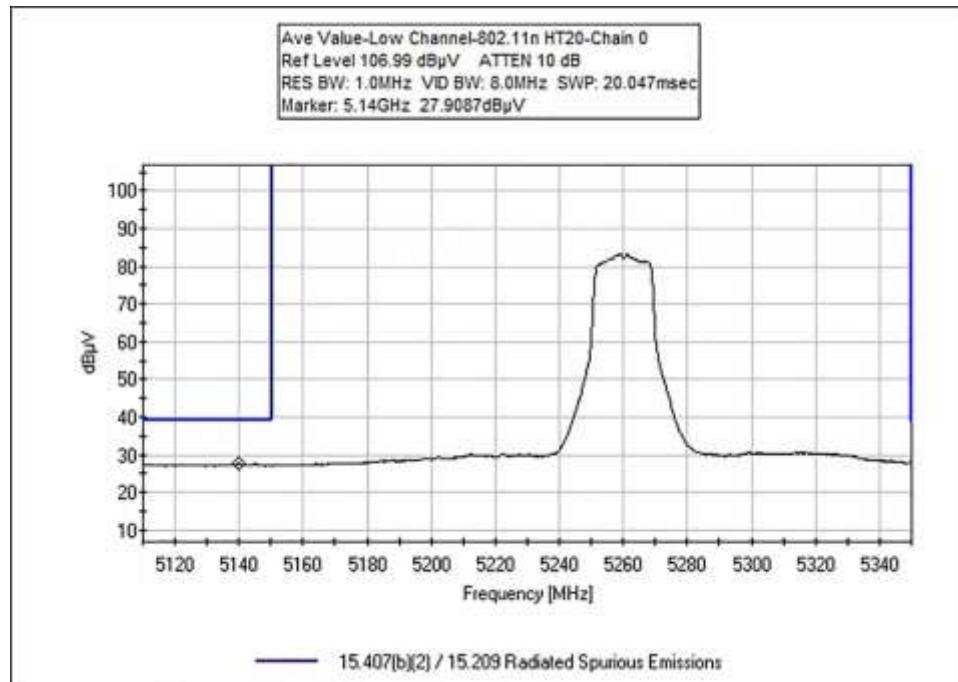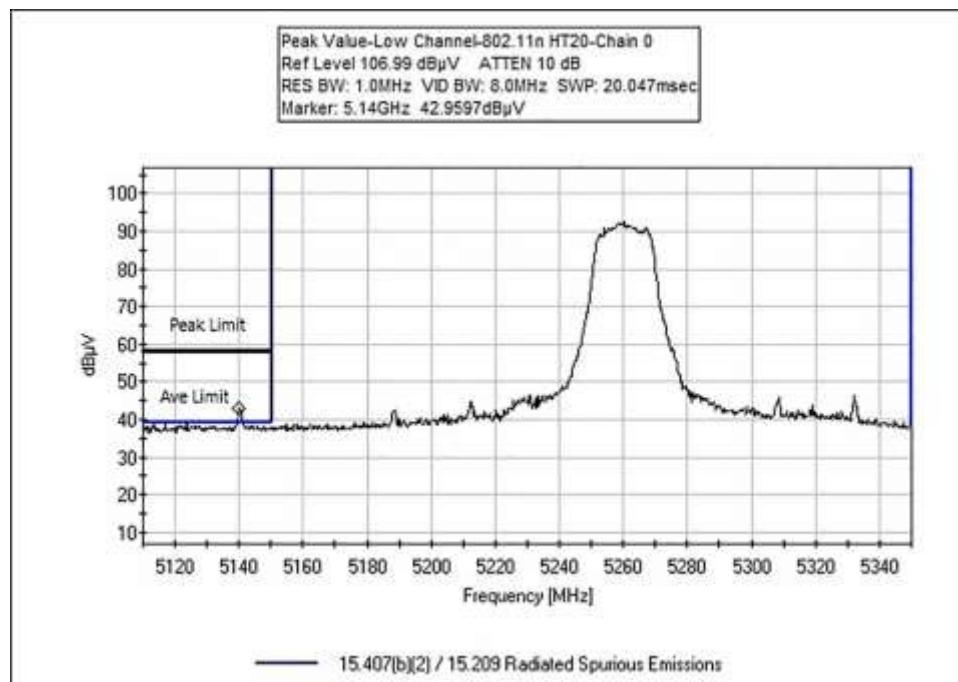

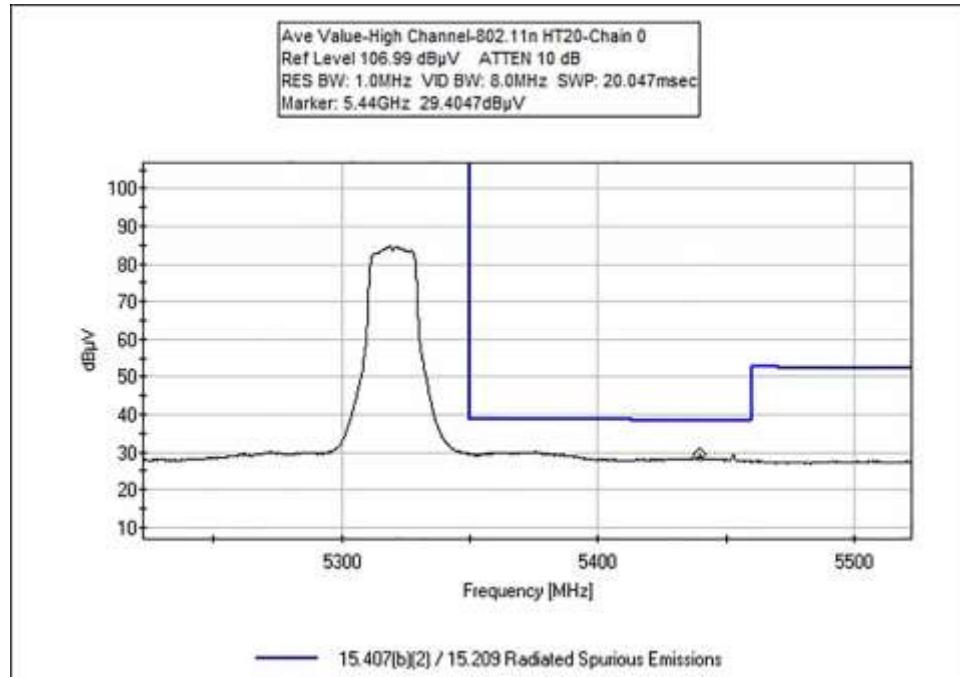
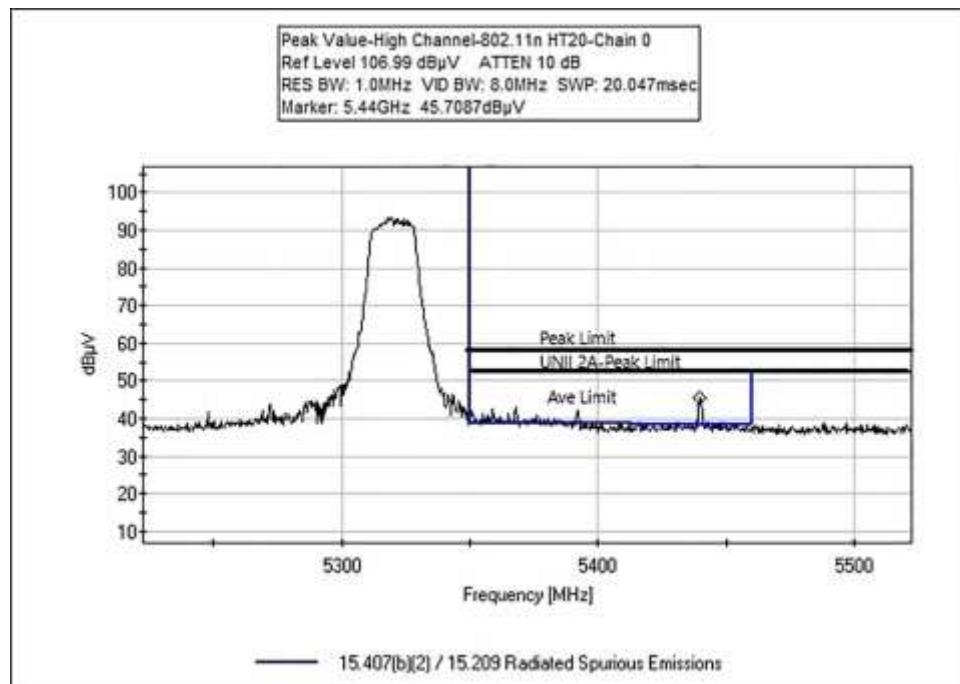




802.11ac 20MHz

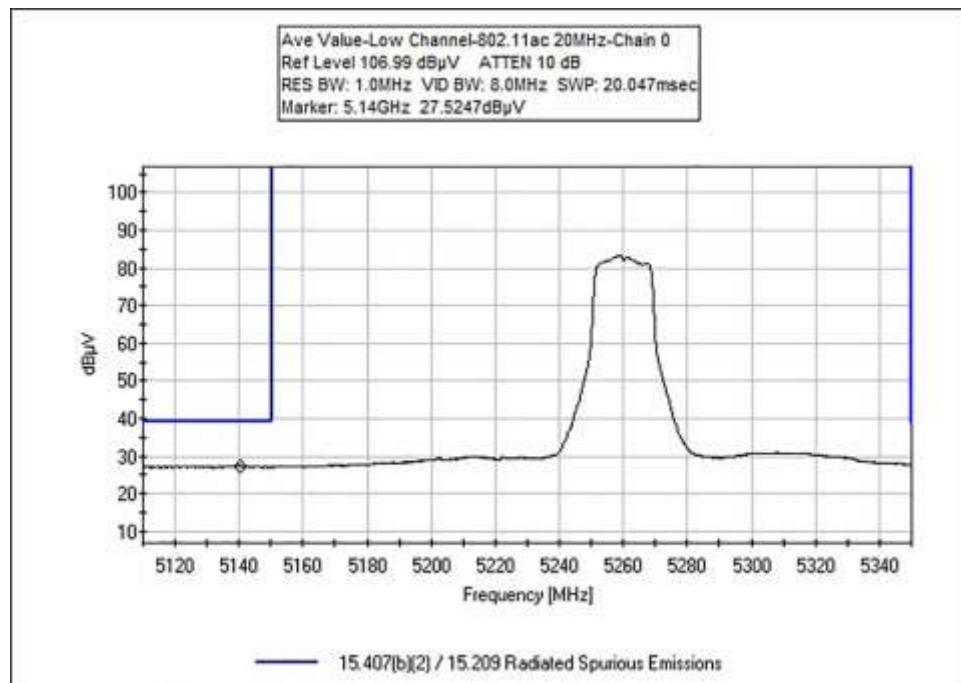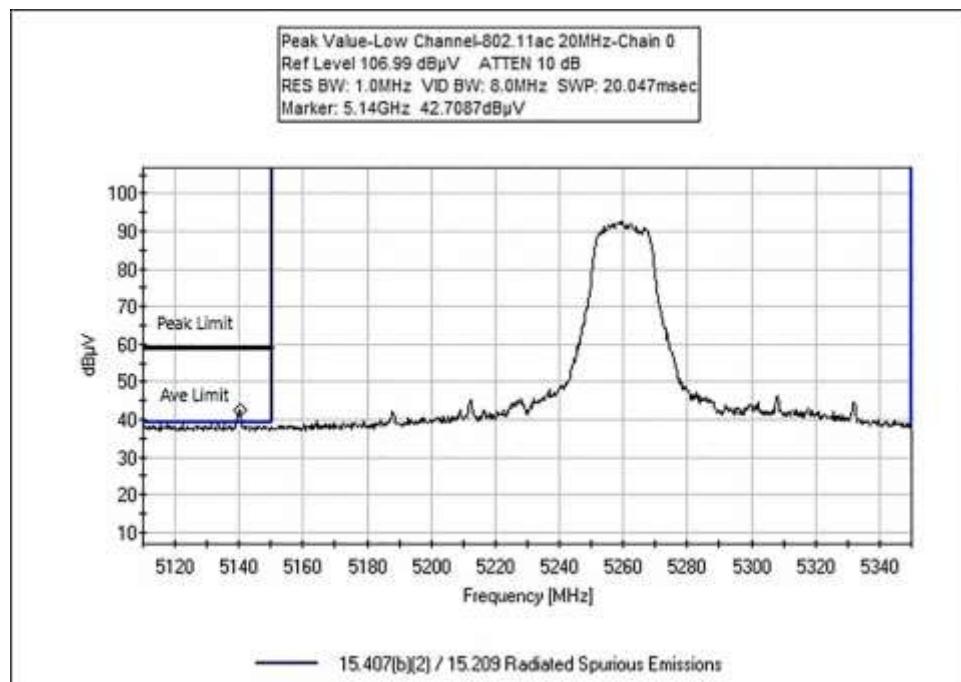

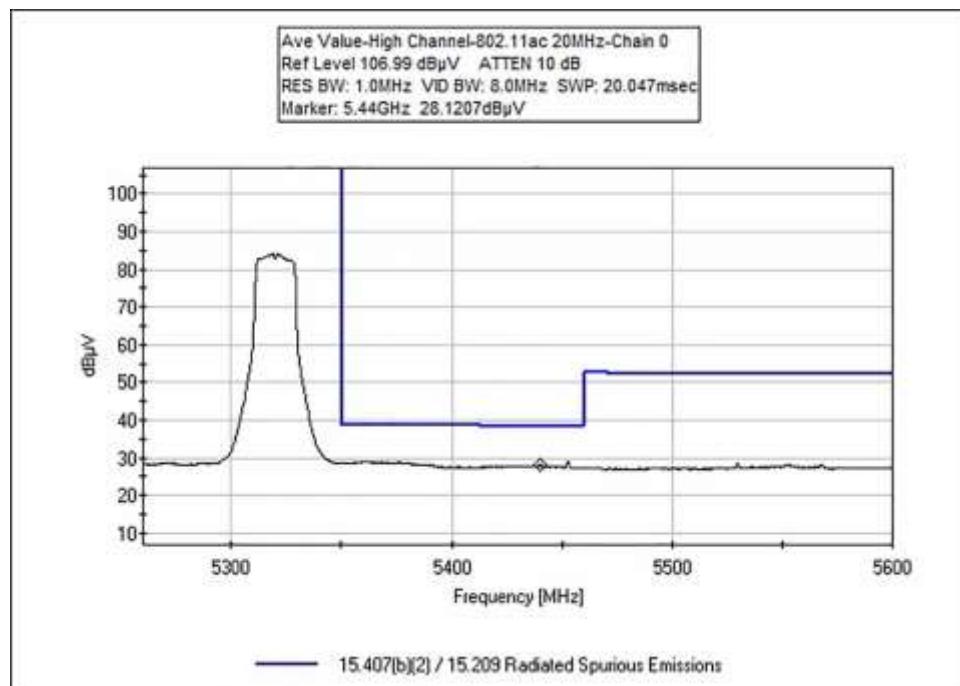
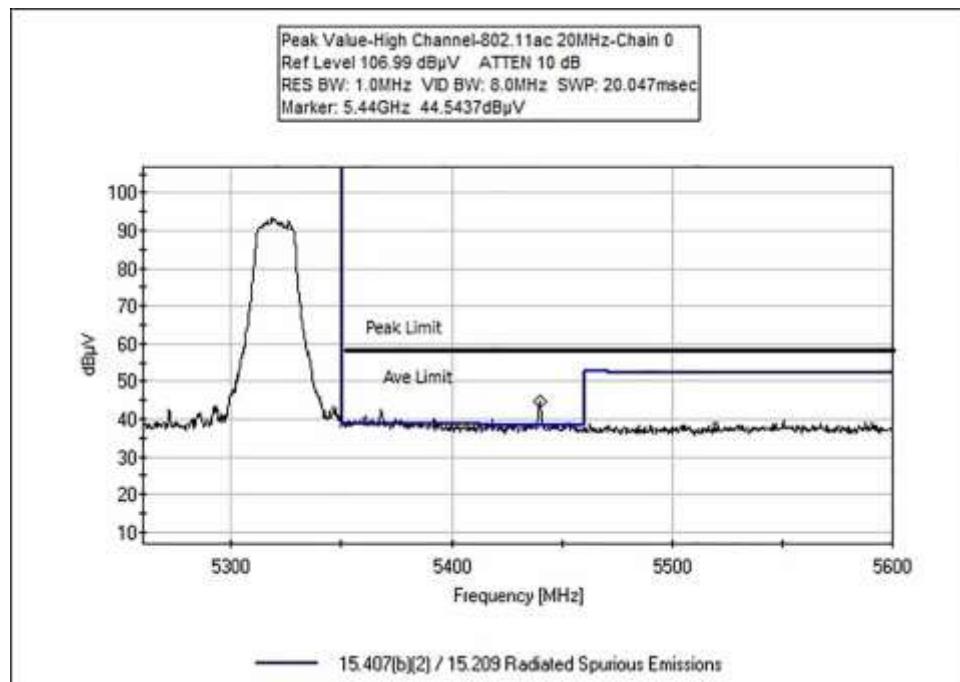




802.11 n HT40

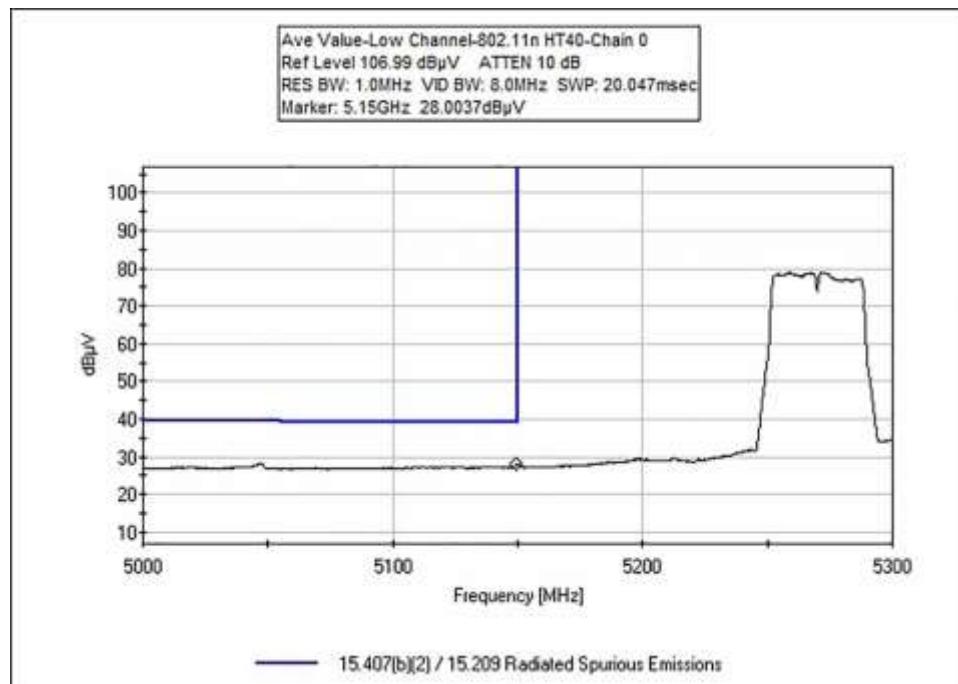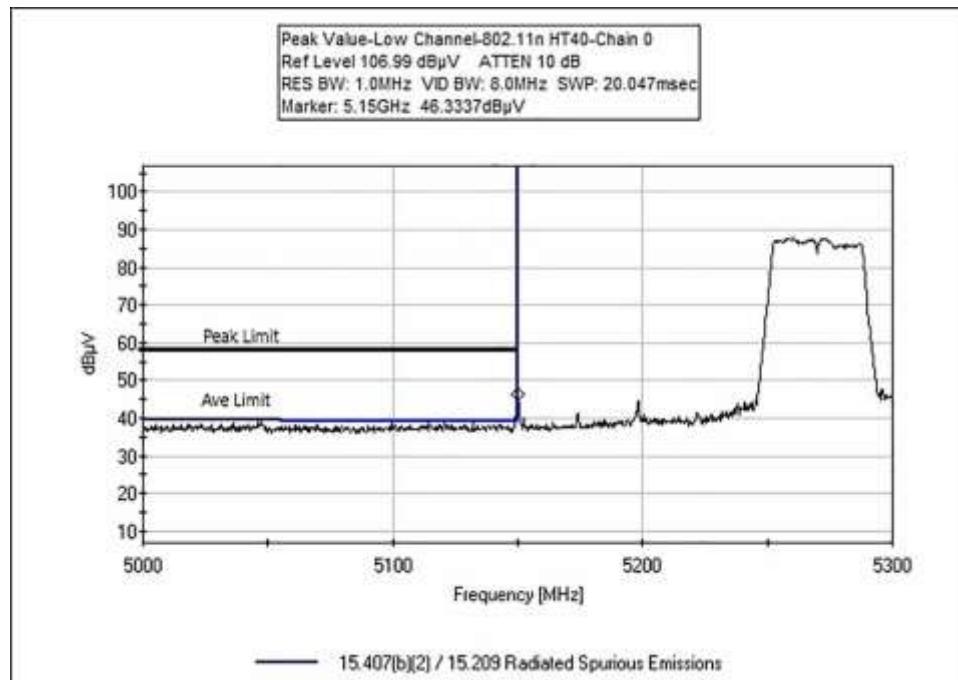

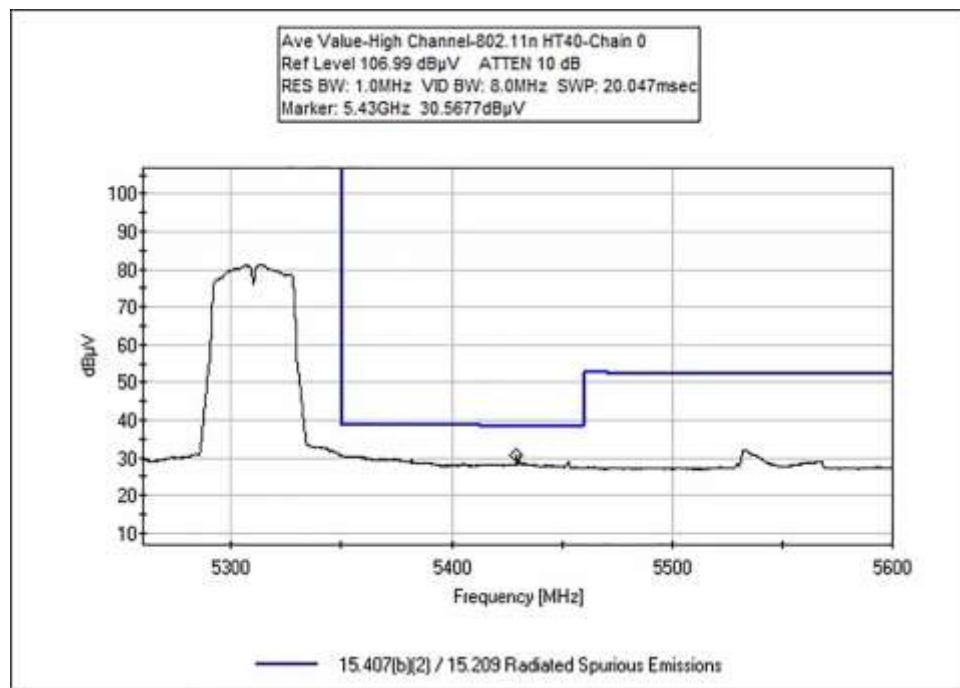
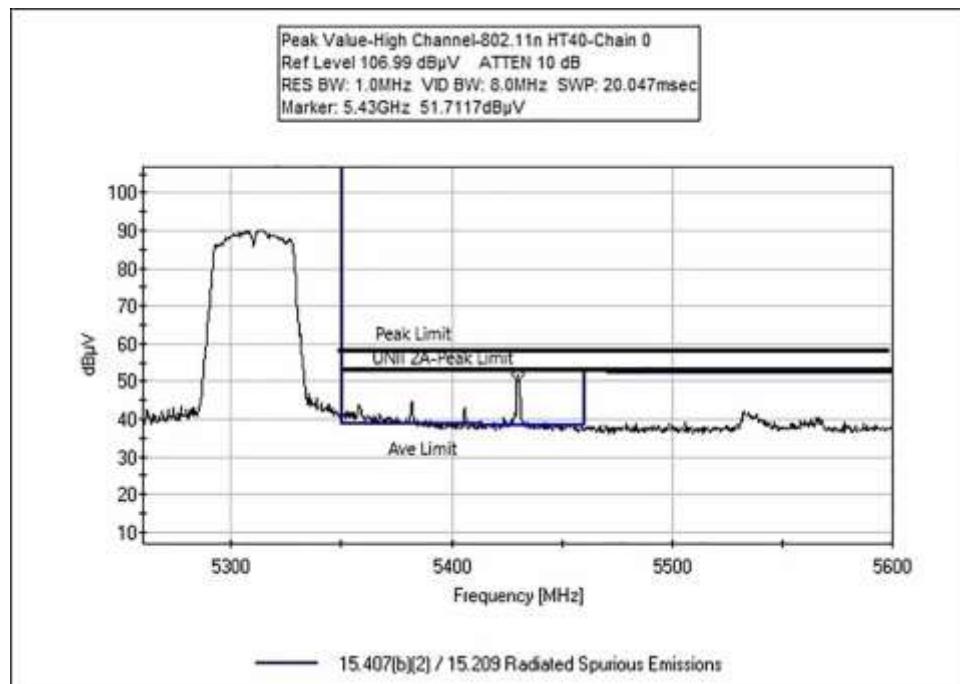




802.11ac 40MHz

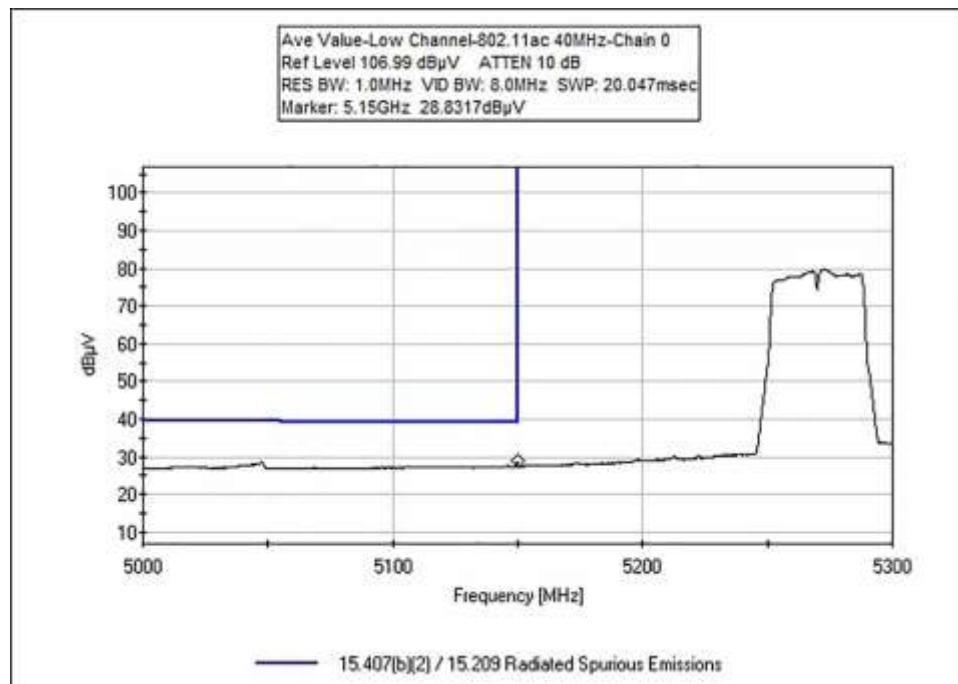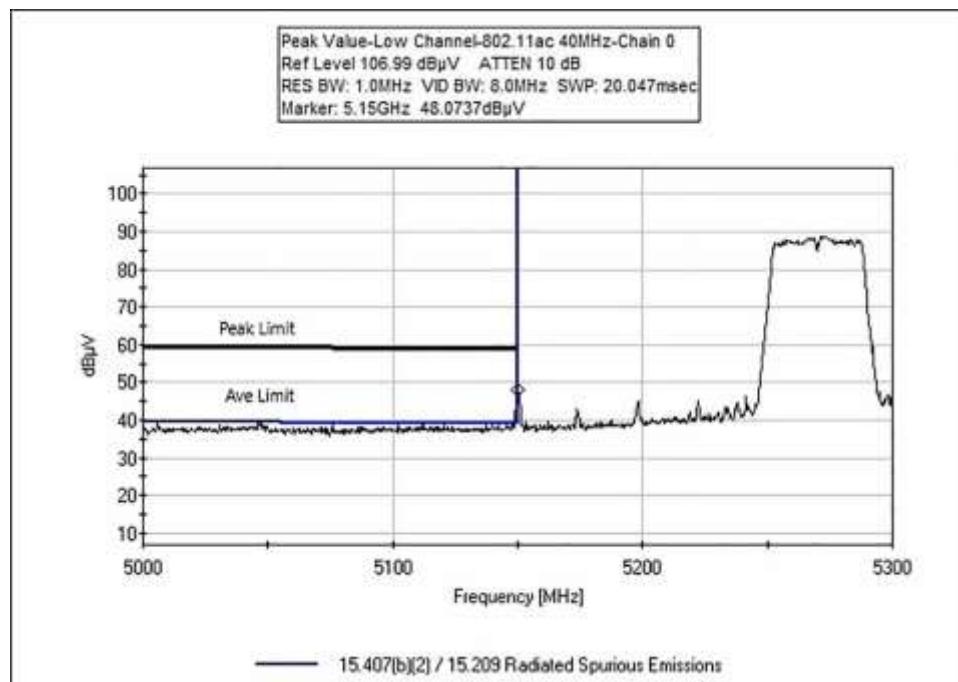

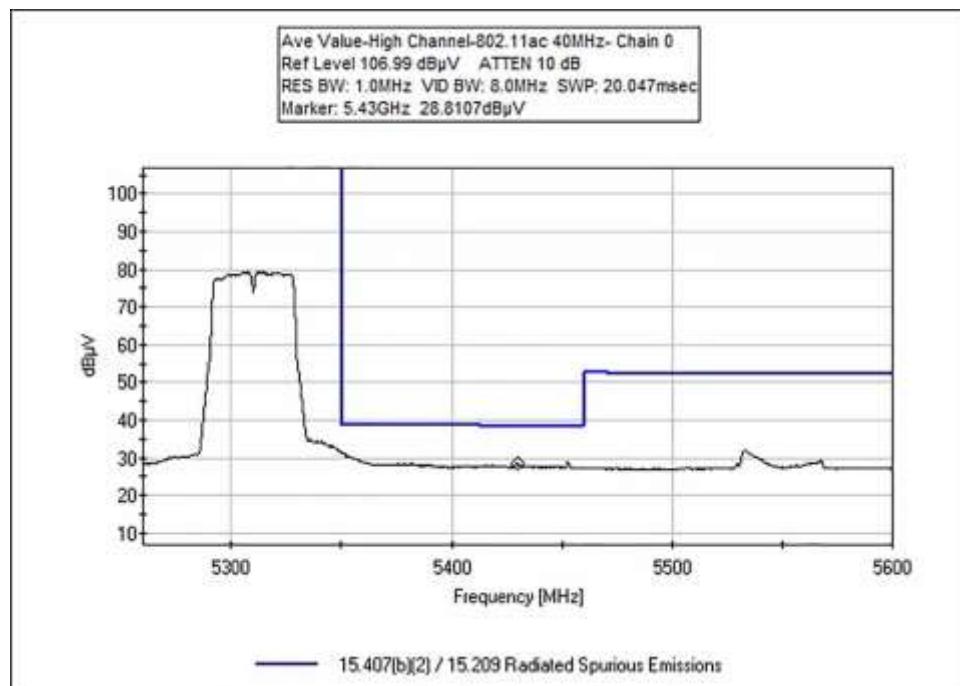
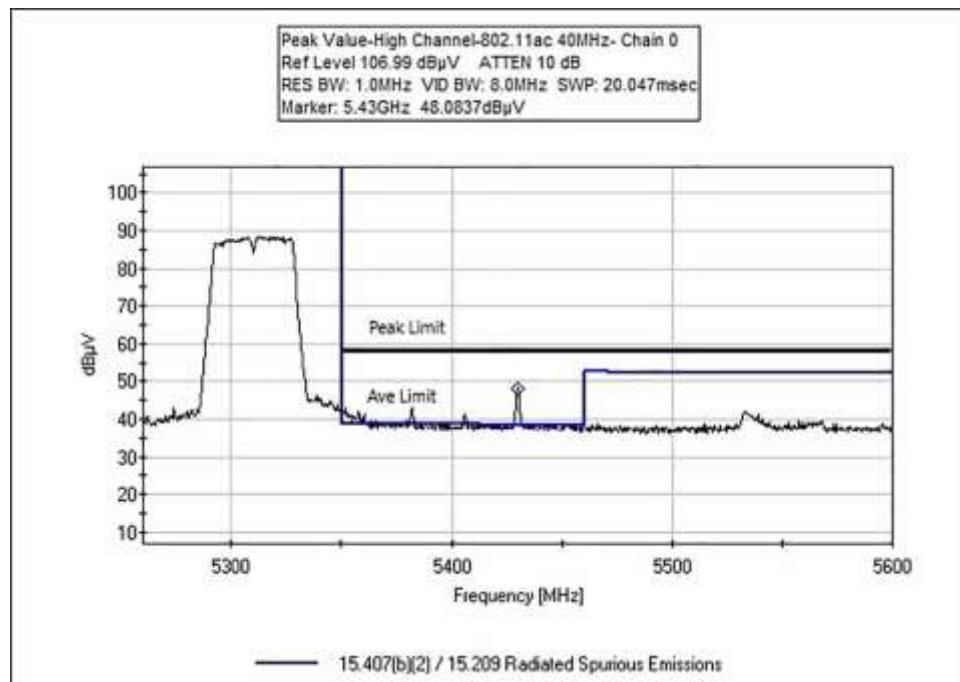




802.11ac 80MHz

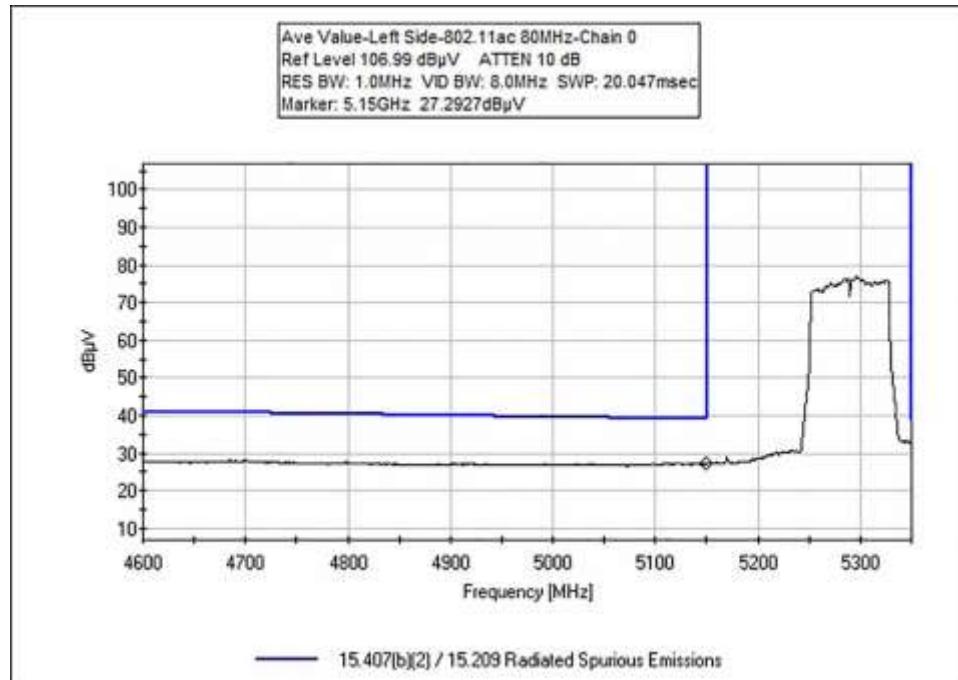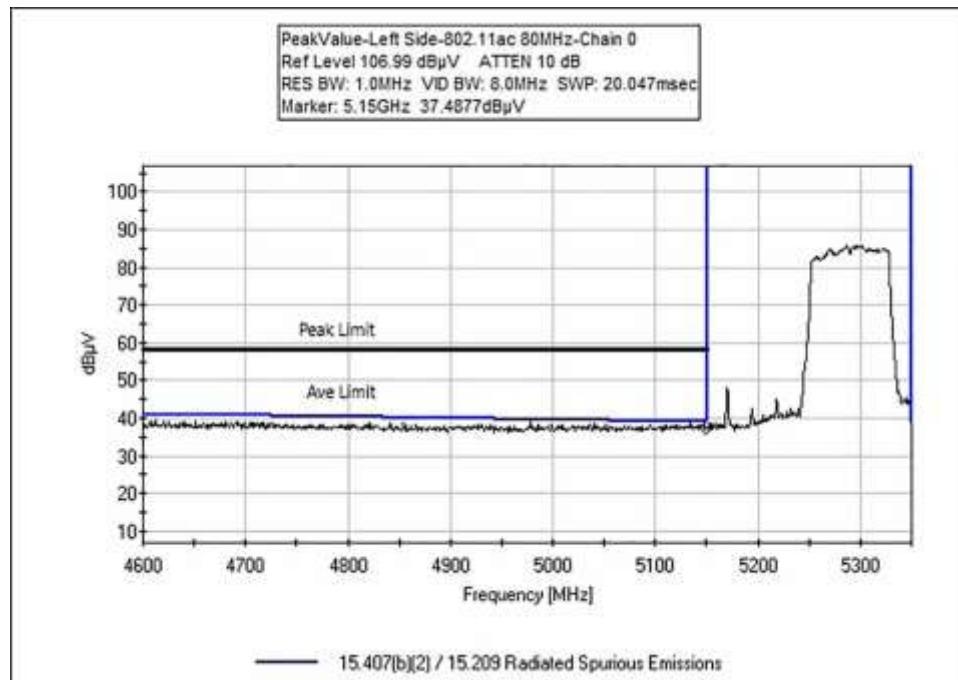

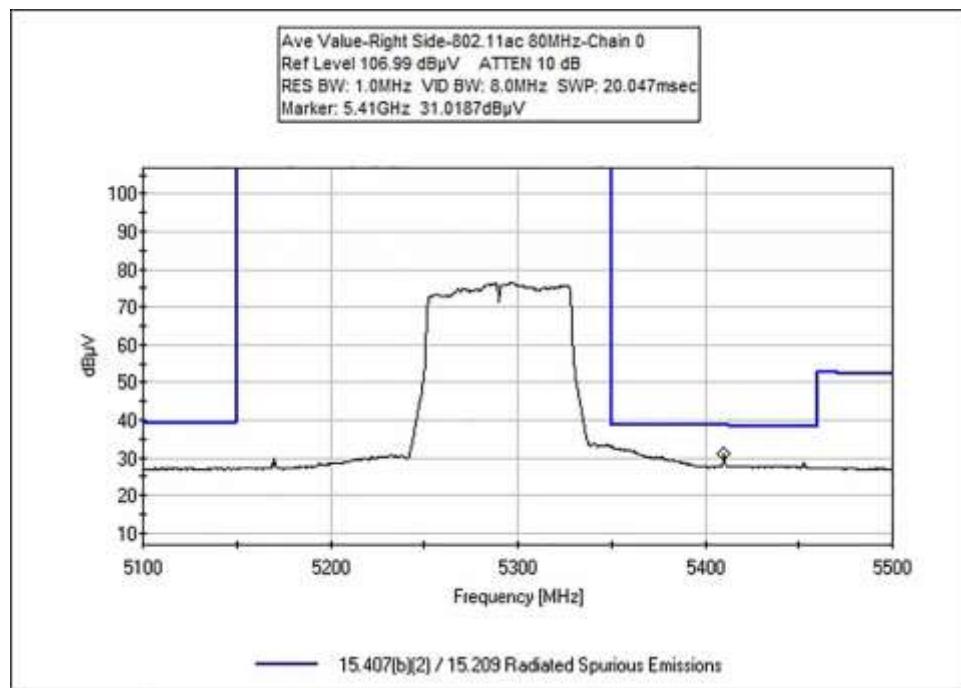
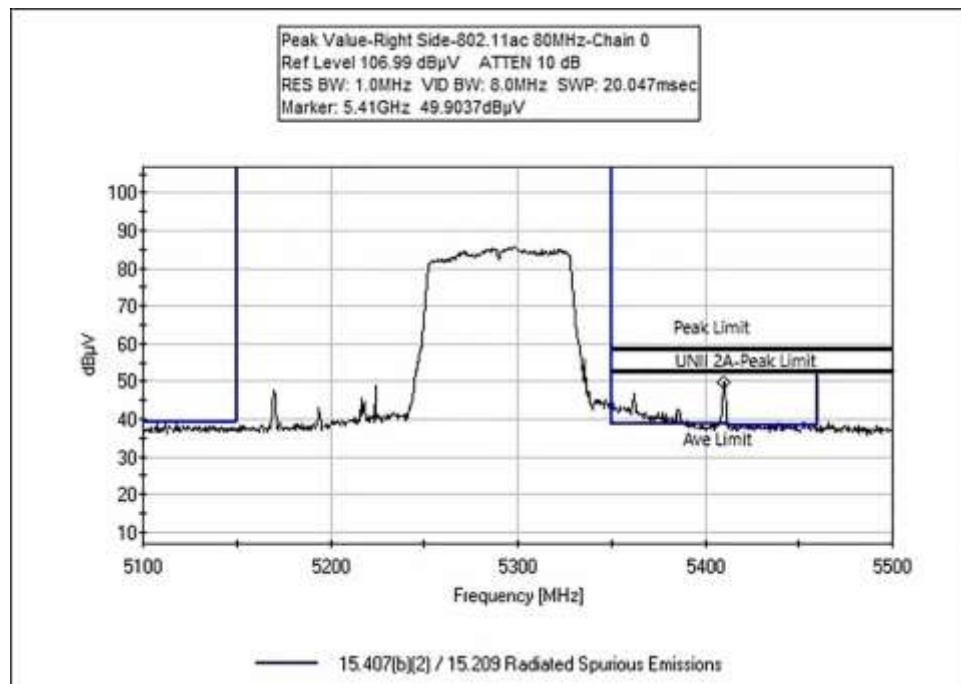




Chain 1
802.11a

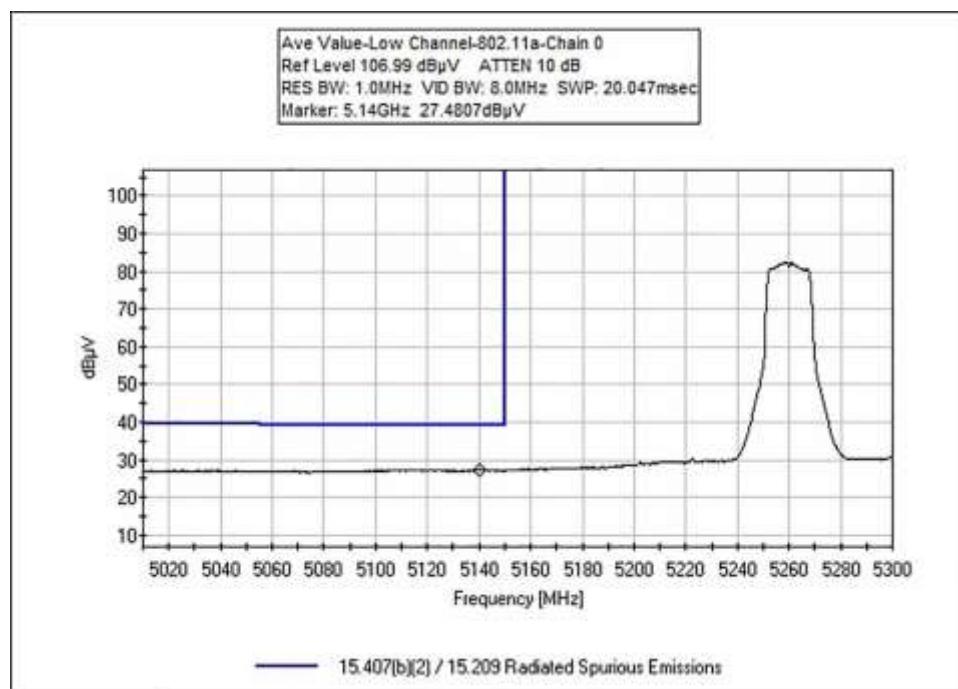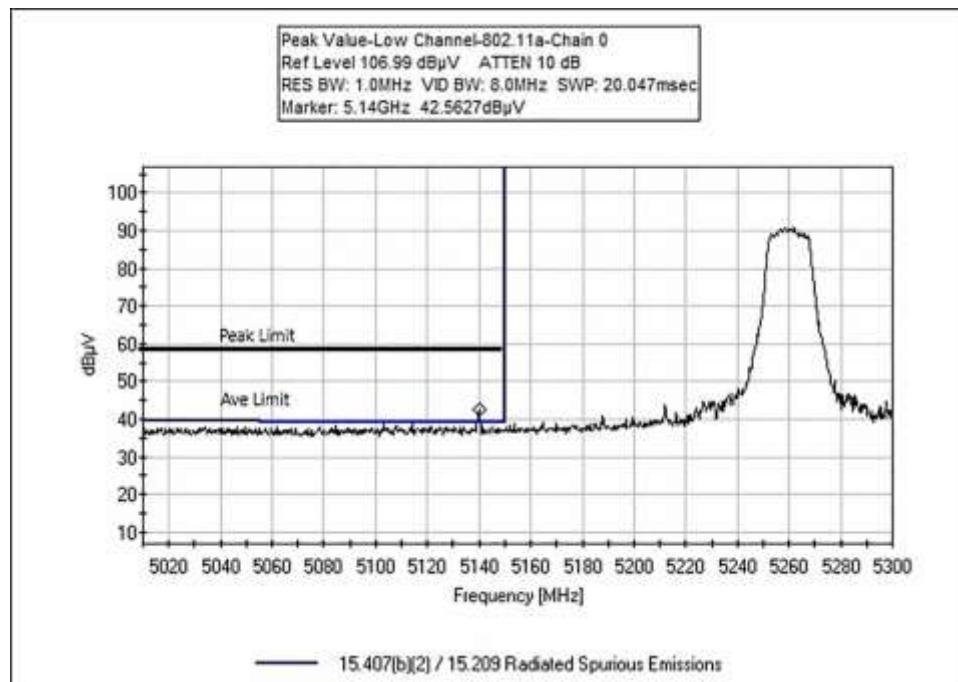

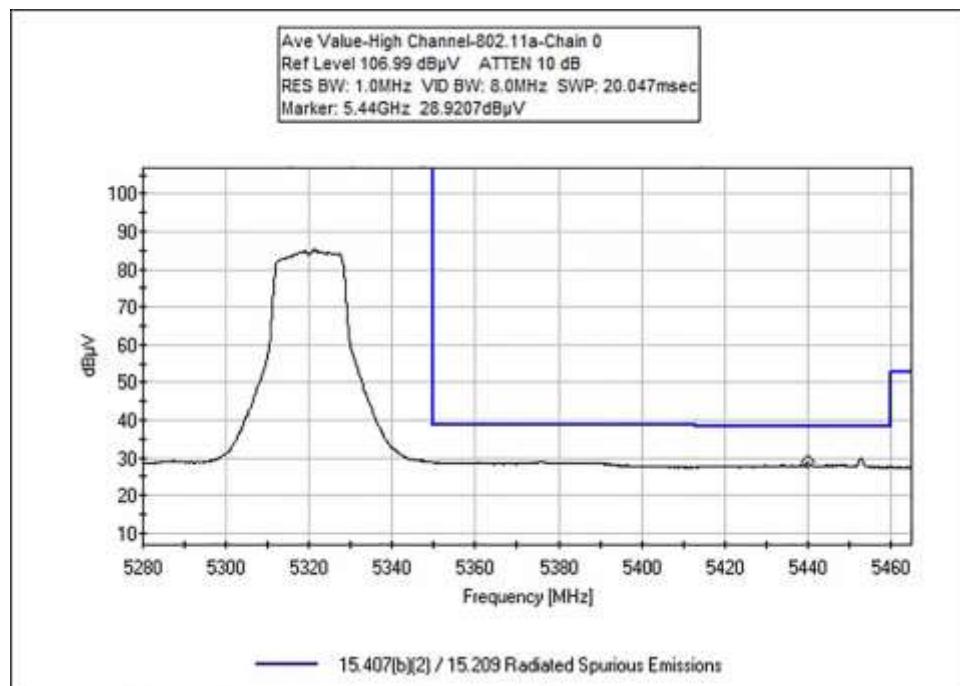
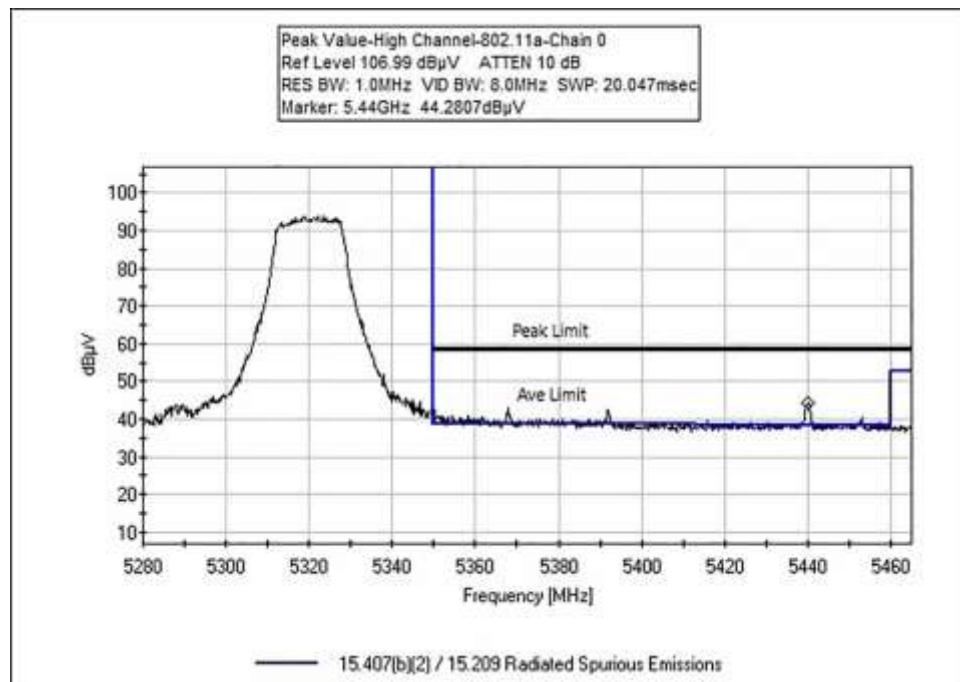




802.11n HT20

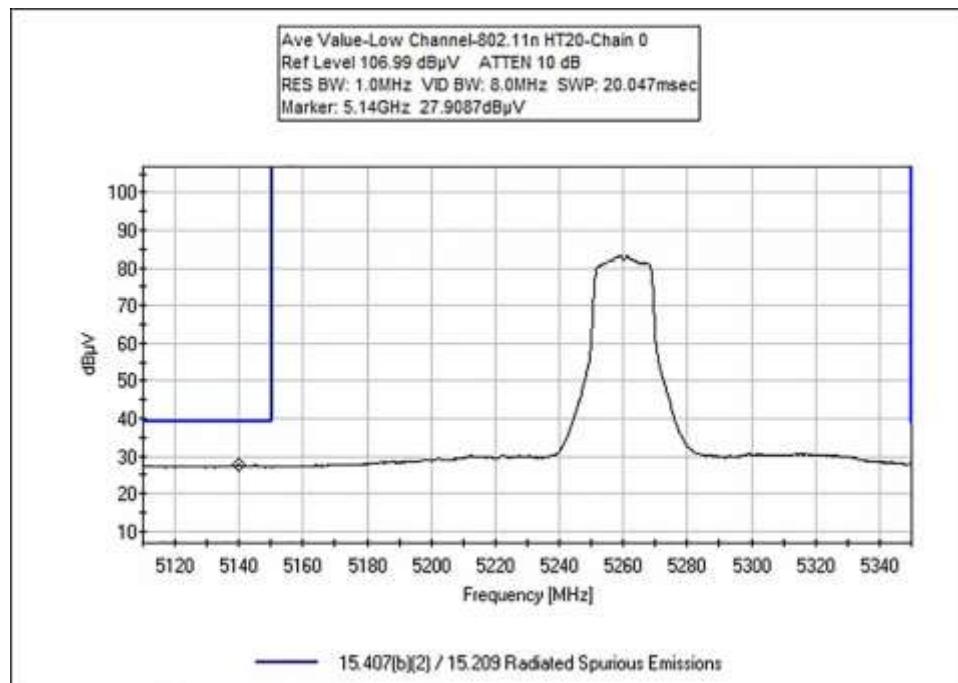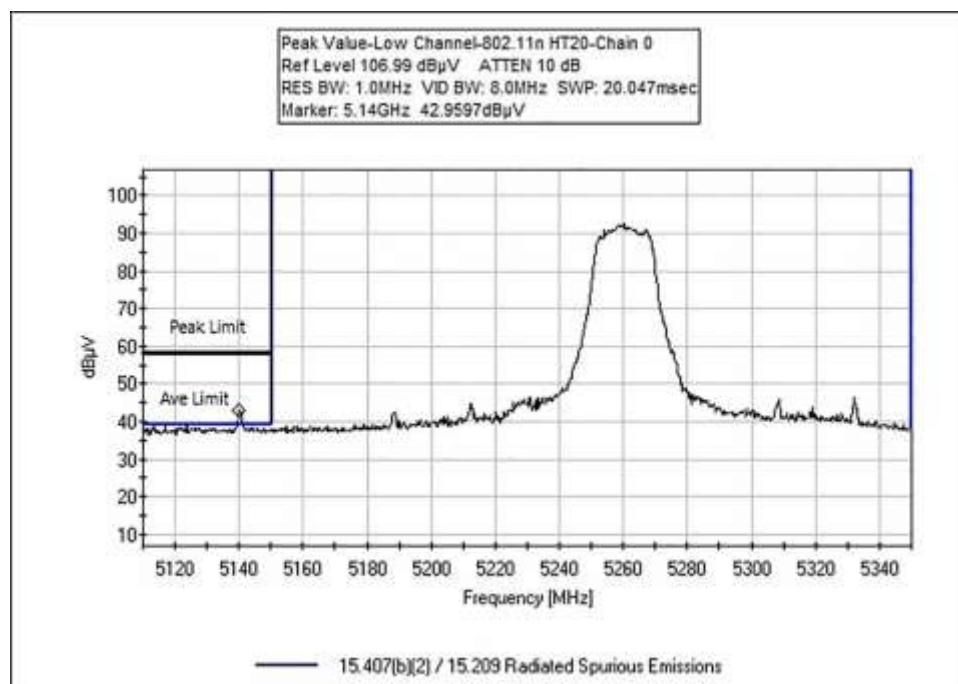

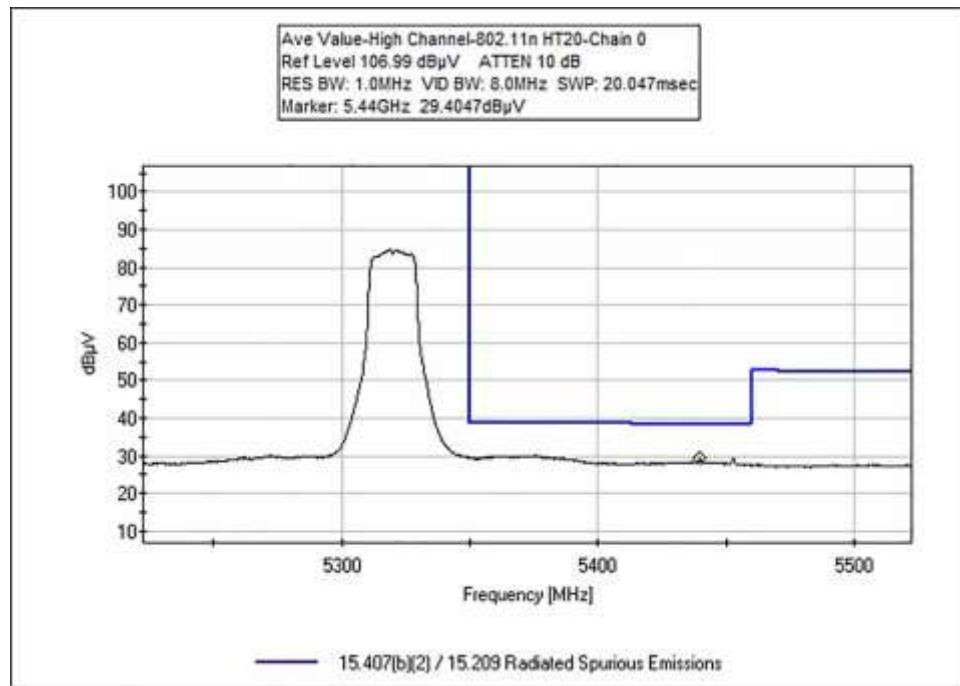
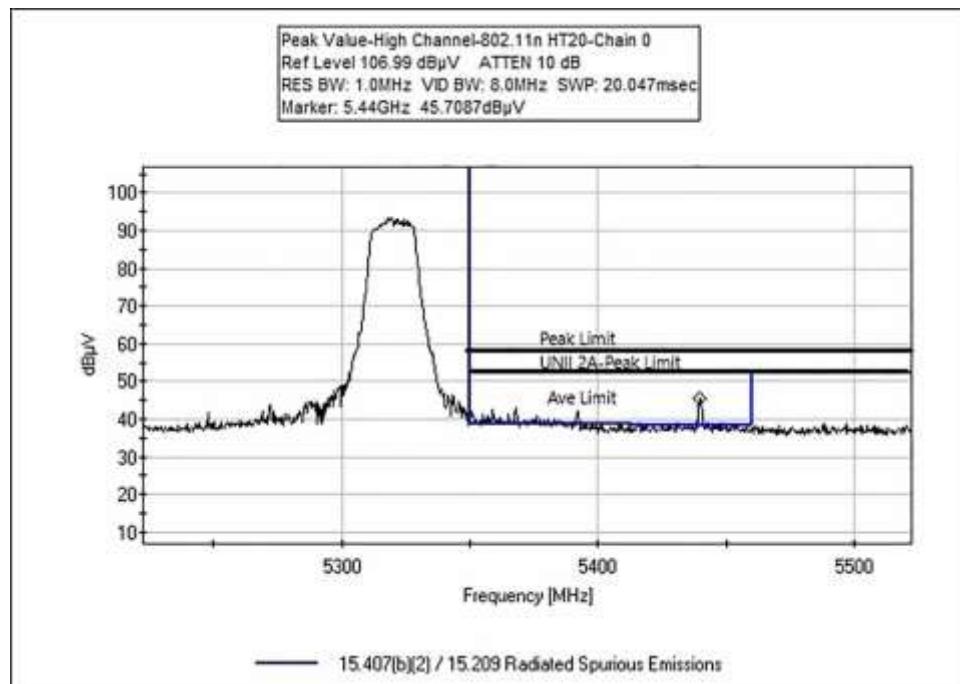




802.11ac 20MHz

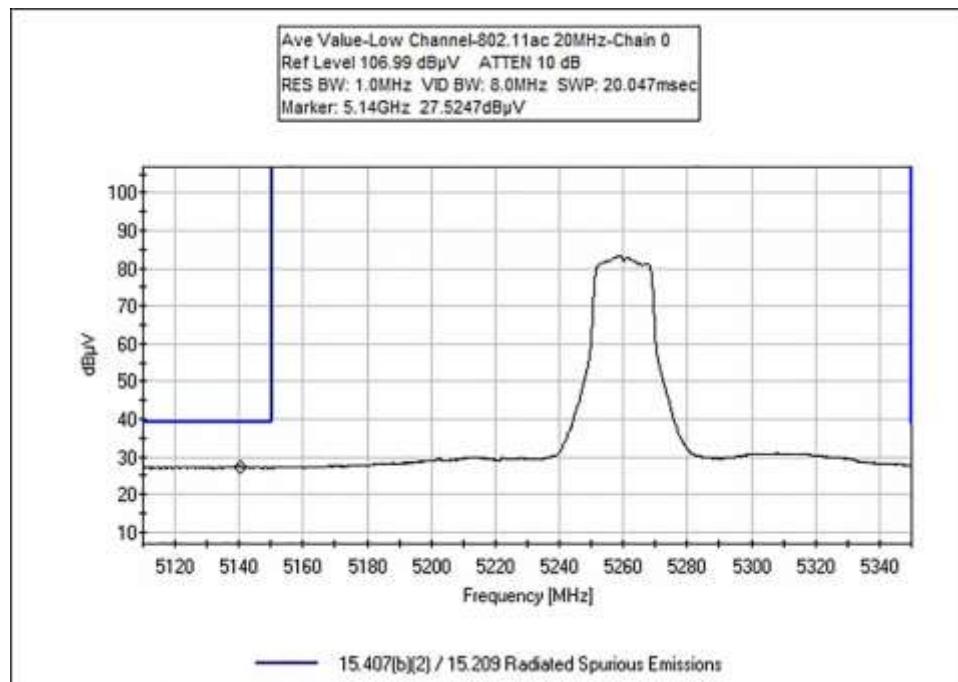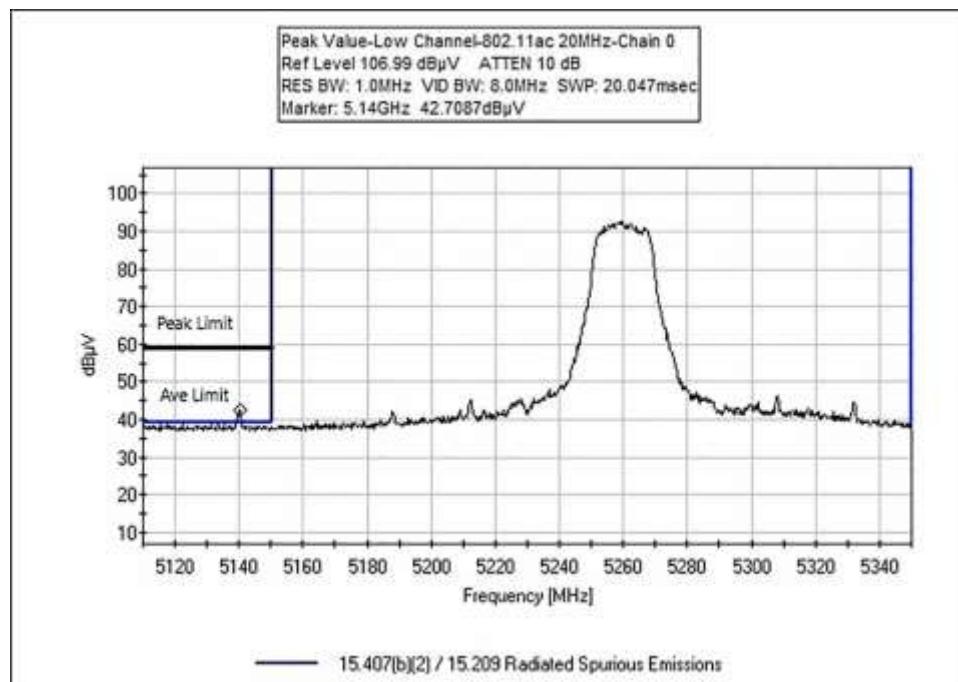

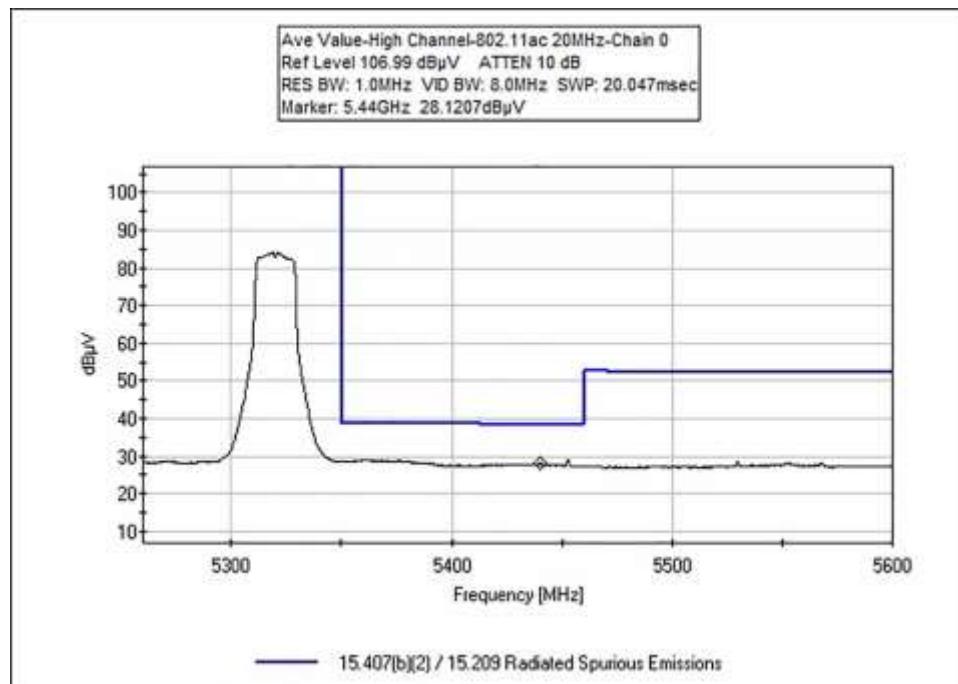
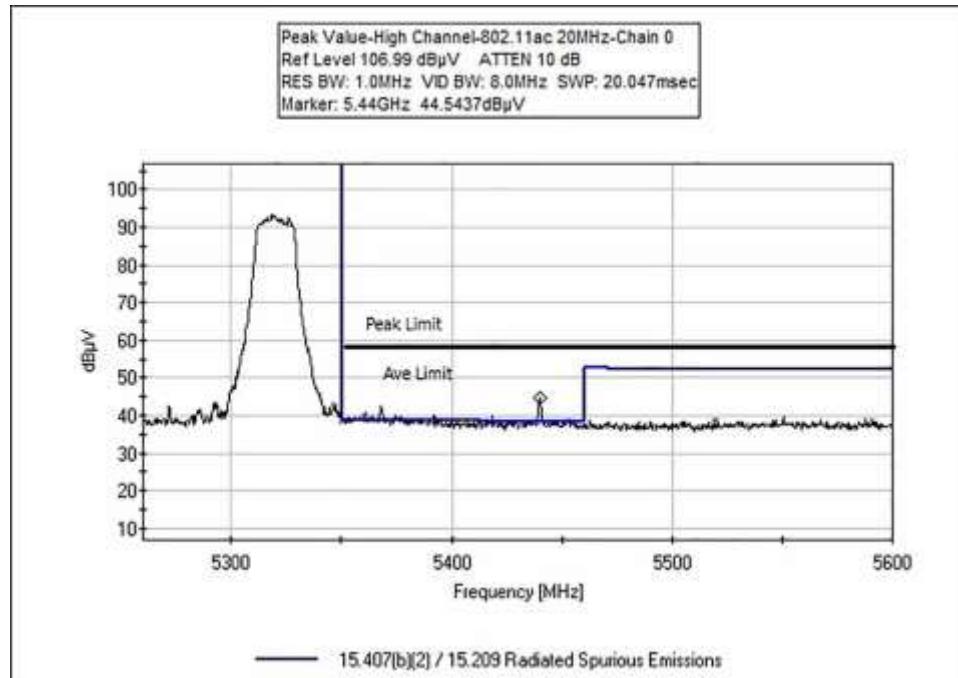




802.11 n HT40

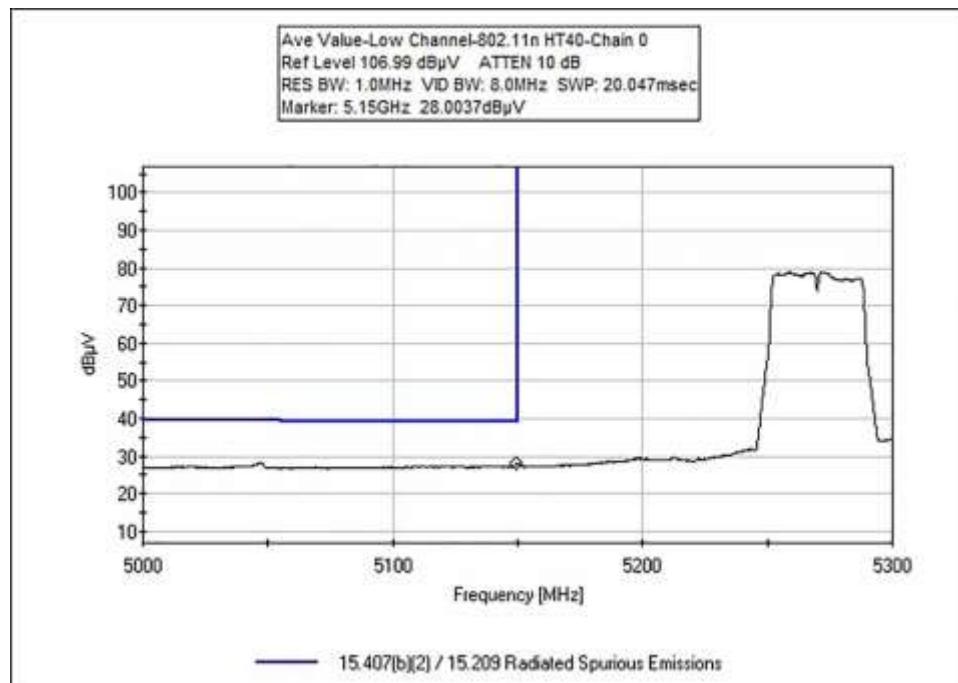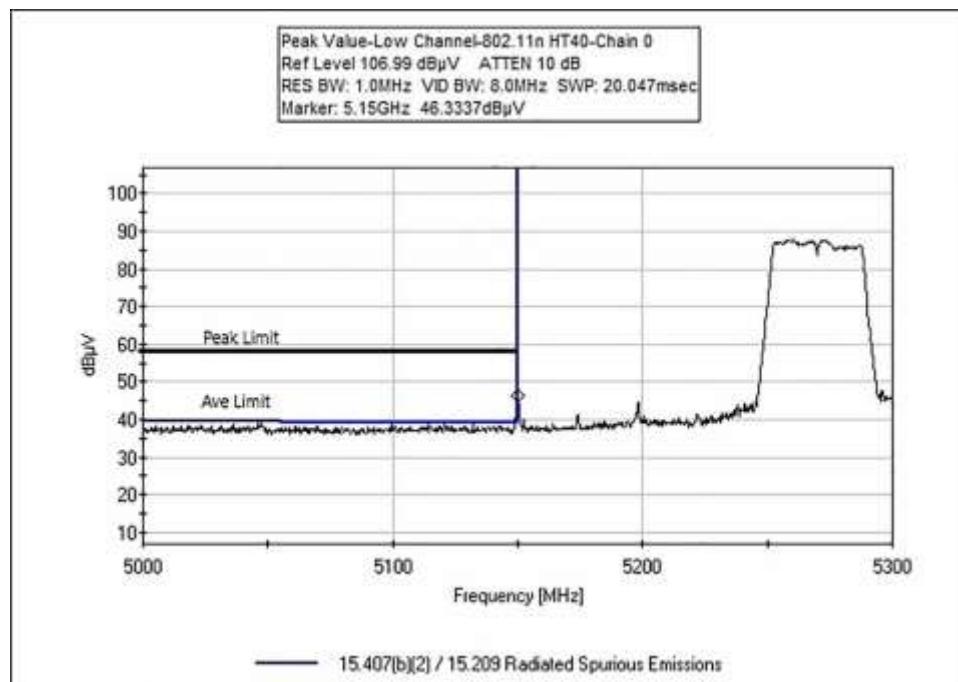

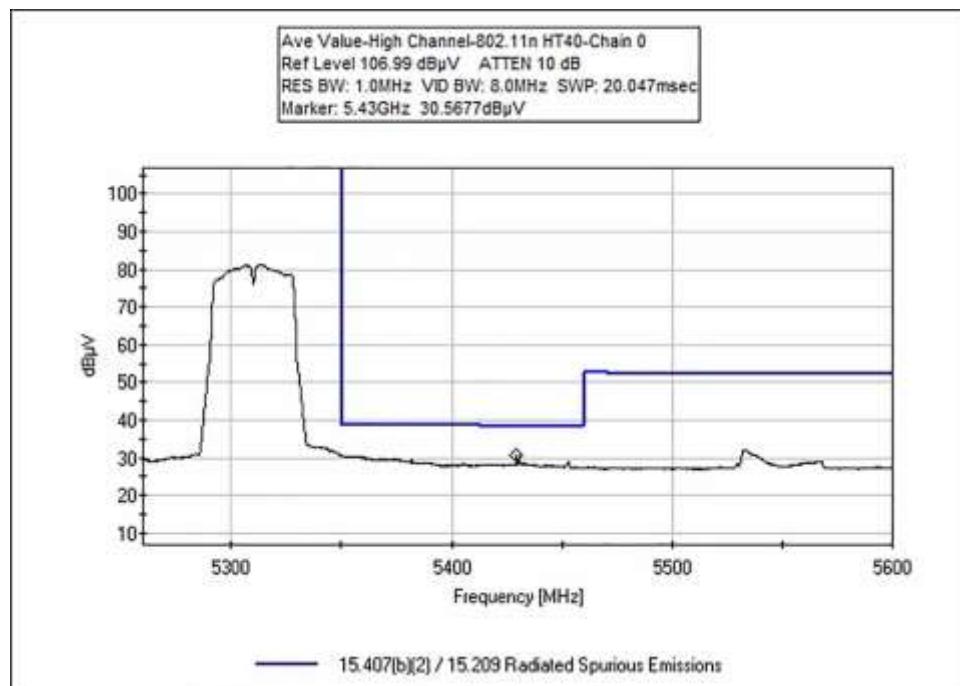
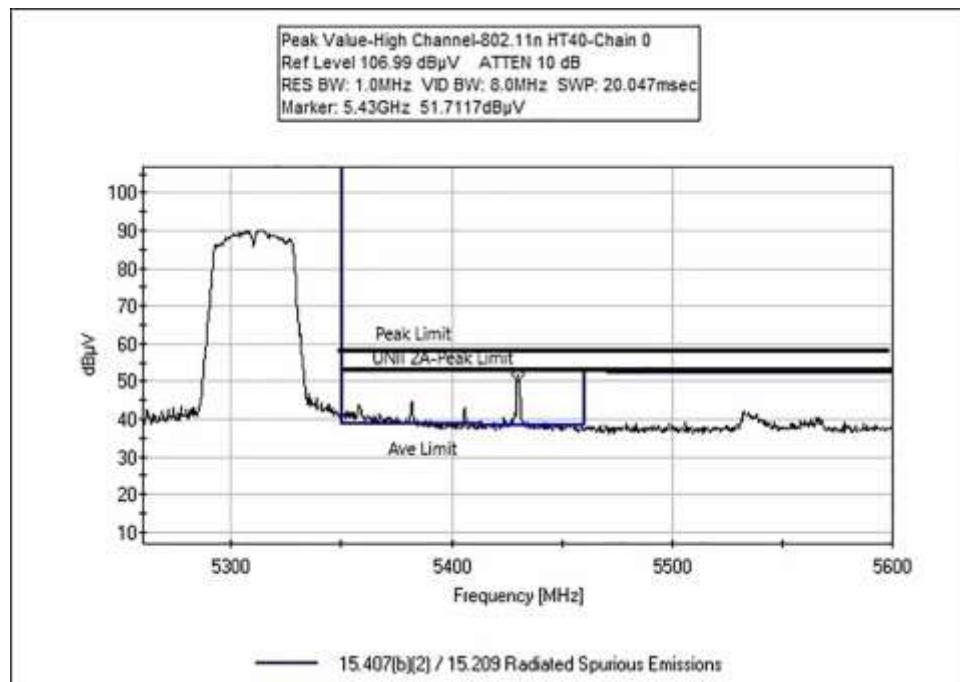




802.11ac 40MHz

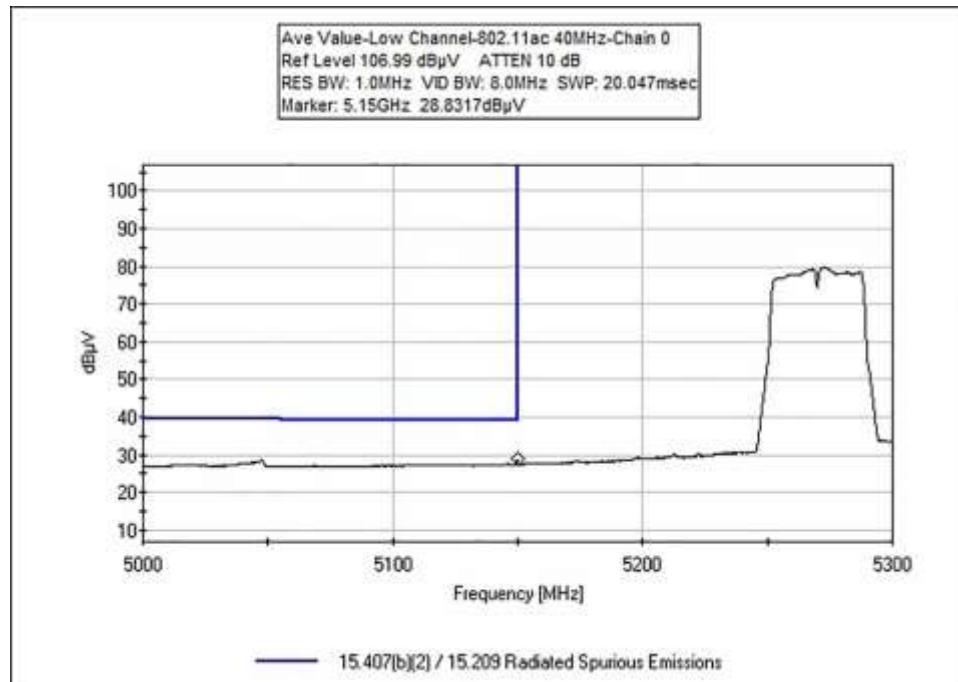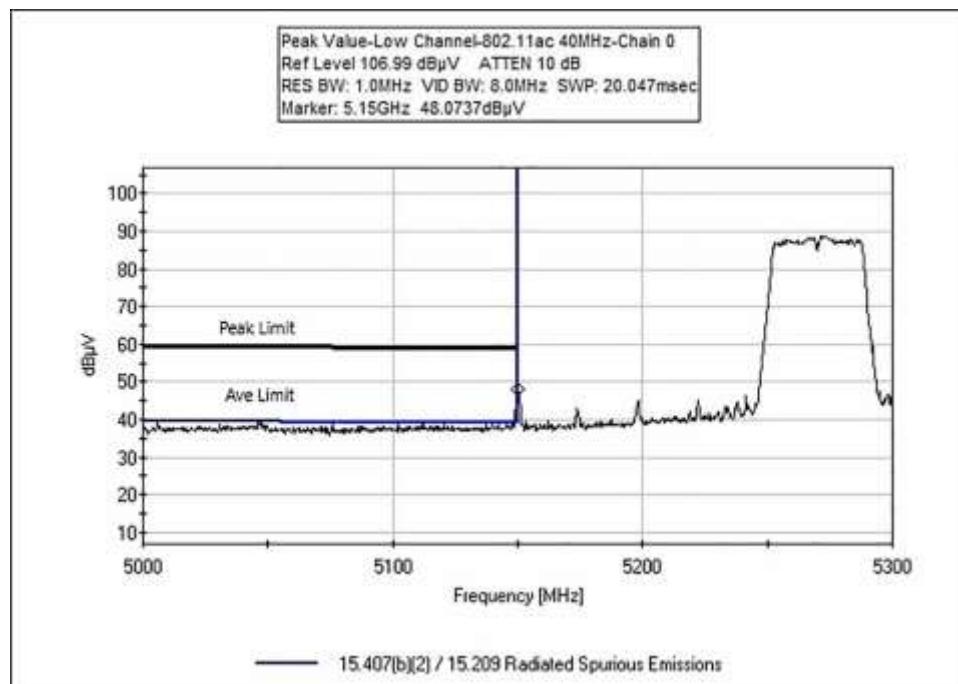

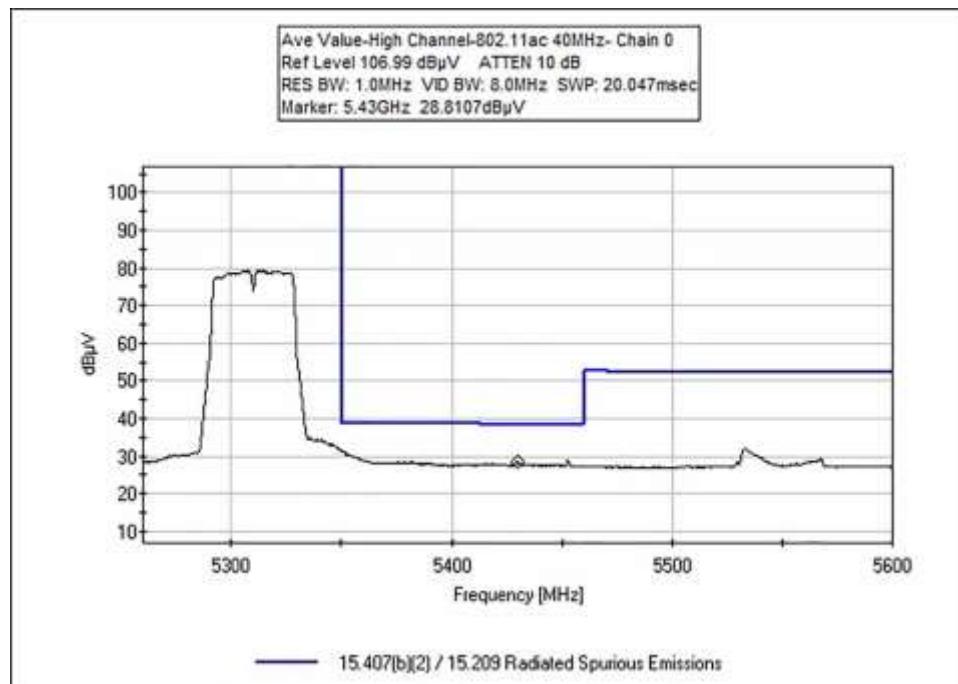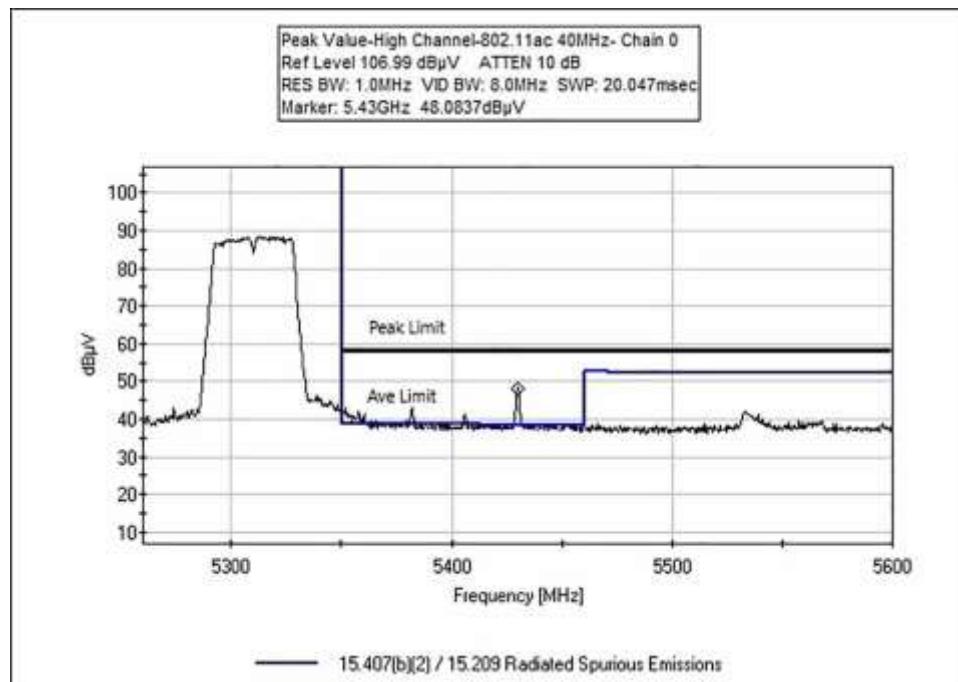

802.11ac 80MHz

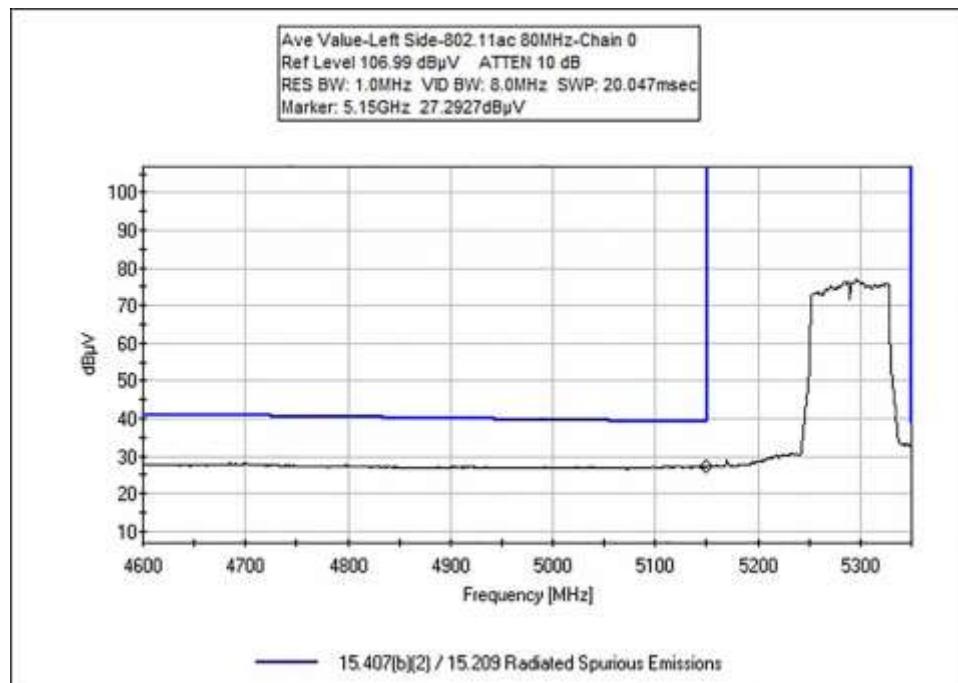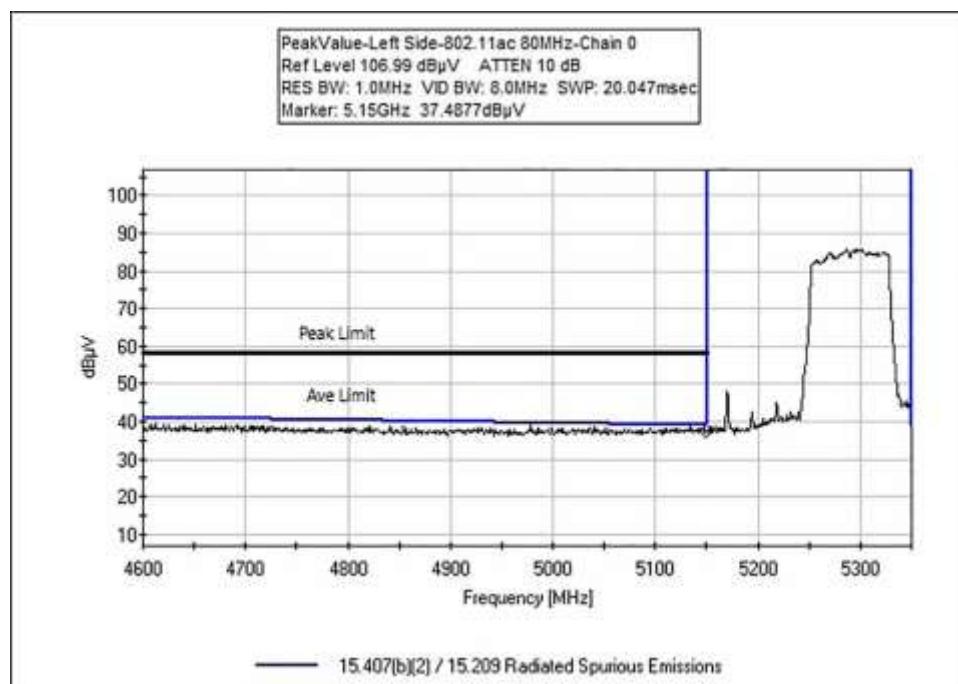

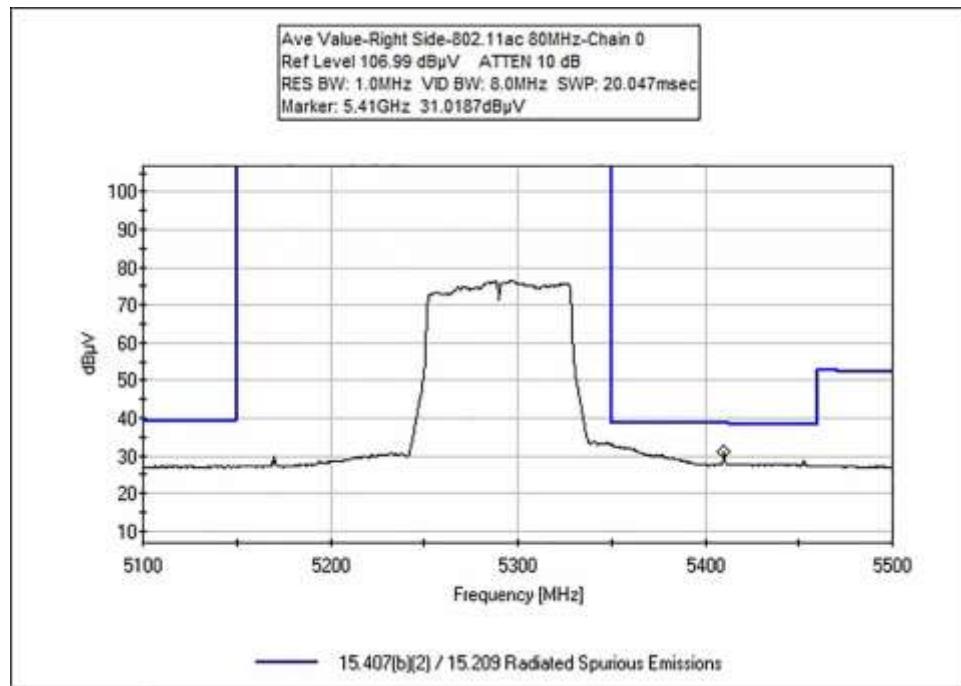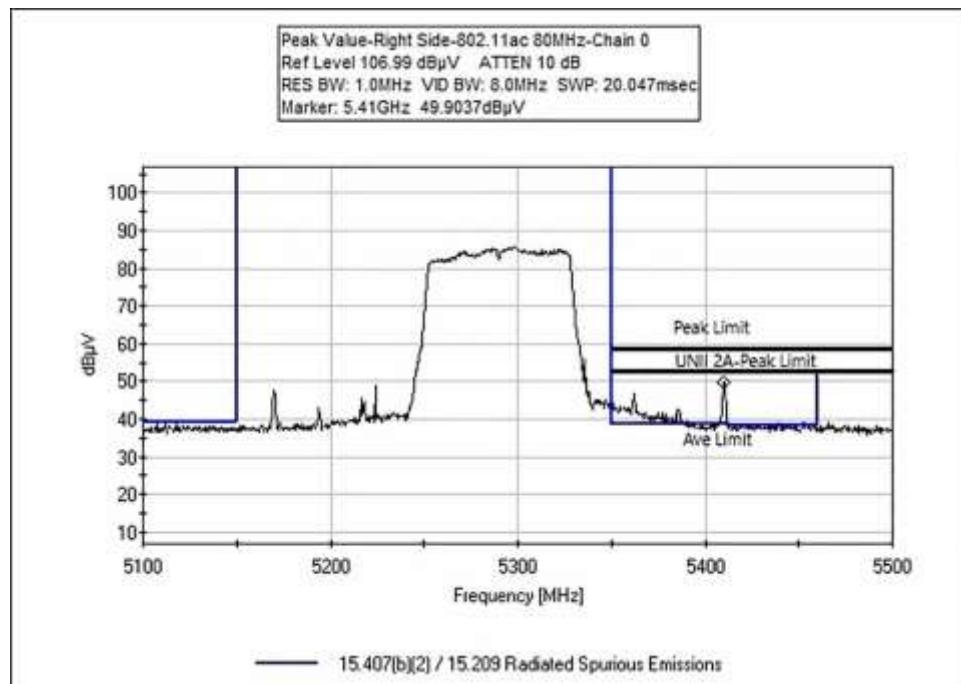

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: Band Edge
 Work Order #: **110285** Date: 10/25/2024
 Test Type: **Radiated Scan** Time: 15:54:23
 Tested By: Hieu Song Nguyenpham Sequence#: 15
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Band Edge
Test Environment Conditions:
Temperature: 21.8°C
Humidity: 47%
Atmospheric Pressure: 101.5kPa
Highest Generated Frequency: 5.825GHz
Test Method: ANSI C63.10 (2020), KDB 789033
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on.
Note: Chain 0

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data: Reading listed by order taken. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	5140.130M	41.9	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	56.7 802.11a	54.0	+2.7	Horiz
2	5140.130M Ave	27.5	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	42.3 802.11a	54.0	-11.7	Horiz
3	5440.000M	44.3	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	59.8 802.11a	54.0	+5.8	Horiz
4	5440.000M Ave	28.9	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	44.4 802.11a	54.0	-9.6	Horiz
5	5440.190M	46.1	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	61.6 802.11n HT20	54.0	+7.6	Horiz
6	5440.190M Ave	29.4	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	44.9 802.11n HT20	54.0	-9.1	Horiz
7	5140.300M	42.4	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	57.2 802.11n HT20	54.0	+3.2	Horiz
8	5140.300M Ave	27.9	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	42.7 802.11n HT20	54.0	-11.3	Horiz
9	5140.270M	42.7	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	57.5 802.11ac 20MHz	54.0	+3.5	Horiz
10	5140.270M Ave	27.5	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	42.3 802.11ac 20MHz	54.0	-11.7	Horiz
11	5440.400M	42.9	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	58.4 802.11ac 20MHz	54.0	+4.4	Horiz
12	5440.400M Ave	28.1	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	43.6 802.11ac 20MHz	54.0	-10.4	Horiz
13	5429.500M	51.9	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	67.4 802.11n HT40	54.0	+13.4	Horiz
14	5429.500M Ave	30.6	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	46.1 802.11n HT40	54.0	-7.9	Horiz
15	5149.800M	46.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	61.1 802.11n HT40	54.0	+7.1	Horiz
16	5149.800M Ave	28.0	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	42.8 802.11n HT40	54.0	-11.2	Horiz

17	5149.800M	47.7	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	62.5	54.0	+8.5	Horiz
									802.11ac 40MHz		
18	5149.800M	28.8	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	43.6	54.0	-10.4	Horiz
	Ave								802.11ac 40MHz		
19	5429.800M	47.4	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	62.9	54.0	+8.9	Horiz
									802.11ac 40MHz		
20	5429.800M	28.6	+34.7 +1.2	+2.2	+3.8	-26.4	+0.0	44.1	54.0	-9.9	Horiz
	Ave								802.11ac 40MHz		
21	5409.900M	49.9	+34.6 +1.2	+2.2	+3.8	-26.4	+0.0	65.3	54.0	+11.3	Horiz
									802.11ac 80MHz		
22	5409.900M	31.0	+34.6 +1.2	+2.2	+3.8	-26.4	+0.0	46.4	54.0	-7.6	Horiz
	Ave								802.11ac 80MHz		
23	5150.000M	37.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	52.1	54.0	-1.9	Horiz
									802.11ac 80MHz		
24	5150.000M	27.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	42.1	54.0	-11.9	Horiz
	Ave								802.11ac 80MHz		



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: Band Edge
Work Order #: **110285** Date: 11/1/2024
Test Type: **Radiated Scan** Time: 09:58:52
Tested By: Hieu Song Nguyenpham Sequence#: 20
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Band Edge
Test Environment Conditions:
Temperature: 21.8°C
Humidity: 47%
Atmospheric Pressure: 101.5kPa
Highest Generated Frequency: 5.825GHz
Test Method: ANSI C63.10 (2020), KDB 789033
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on.
Note: Chain 1

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data:

Reading listed by order taken.


Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	5150.000M	36.9	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	51.7 802.11a	54.0	-2.3	Horiz
2	5150.000M Ave	26.1	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	40.9 802.11a	54.0	-13.1	Horiz
3	5350.000M	39.1	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	54.4 802.11a	54.0	+0.4	Horiz
4	5350.000M Ave	29.3	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	44.6 802.11a	54.0	-9.4	Horiz
5	5150.000M	36.0	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	50.8 802.11n HT20	54.0	-3.2	Horiz
6	5150.000M Ave	26.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	41.1 802.11n HT20	54.0	-12.9	Horiz
7	5350.000M	40.4	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	55.7 802.11n HT20	54.0	+1.7	Horiz
8	5350.000M Ave	31.2	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	46.5 802.11n HT20	54.0	-7.5	Horiz
9	5350.000M	39.6	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	54.9 802.11ac 20MHz	54.0	+0.9	Horiz
10	5350.000M Ave	29.9	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	45.2 802.11ac 20MHz	54.0	-8.8	Horiz
11	5150.000M	36.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	51.1 802.11ac 20MHz	54.0	-2.9	Horiz
12	5150.000M Ave	26.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	41.1 802.11ac 20MHz	54.0	-12.9	Horiz
13	5150.000M	37.4	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	52.2 802.11n HT40	54.0	-1.8	Horiz
14	5150.000M Ave	26.1	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	40.9 802.11n HT40	54.0	-13.1	Horiz
15	5350.000M	45.4	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	60.7 802.11n HT40	54.0	+6.7	Horiz
16	5350.000M Ave	34.1	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	49.4 802.11n HT40	54.0	-4.6	Horiz

17	5350.000M	45.3	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	60.6	54.0	+6.6	Horiz
									802.11ac 40MHz		
18	5350.000M	34.4	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	49.7	54.0	-4.3	Horiz
	Ave								802.11ac 40MHz		
19	5150.000M	36.5	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	51.3	54.0	-2.7	Horiz
									802.11ac 40MHz		
20	5150.000M	26.3	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	41.1	54.0	-12.9	Horiz
	Ave								802.11ac 40MHz		
21	5150.000M	37.5	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	52.3	54.0	-1.7	Horiz
									802.11ac 80MHz		
22	5150.000M	26.1	+34.2 +1.2	+2.1	+3.7	-26.4	+0.0	40.9	54.0	-13.1	Horiz
	Ave								802.11ac 80MHz		
23	5350.000M	46.5	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	61.8	54.0	+7.8	Horiz
									802.11ac 80MHz		
24	5350.000M	34.6	+34.5 +1.2	+2.2	+3.8	-26.4	+0.0	49.9	54.0	-4.1	Horiz
	Ave								802.11ac 80MHz		

Test Setup Photo(s)

9kHz-1GHz

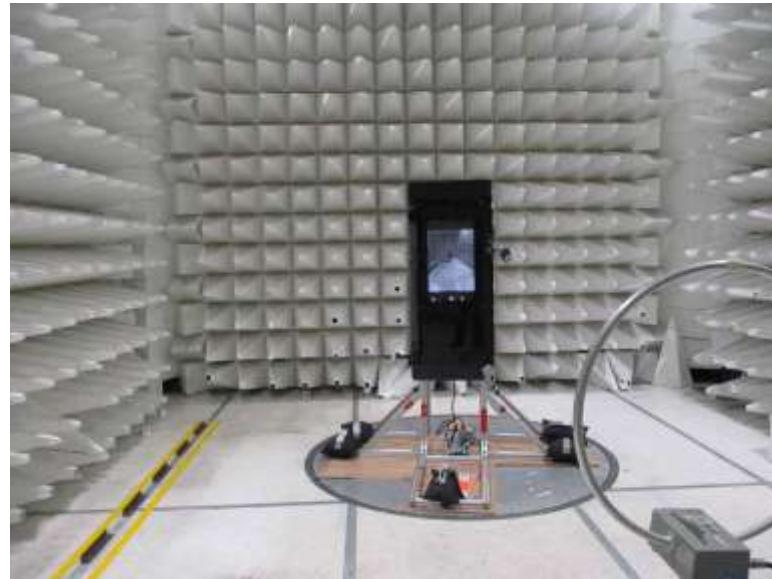


Front View



Back View

30MHz-1GHz

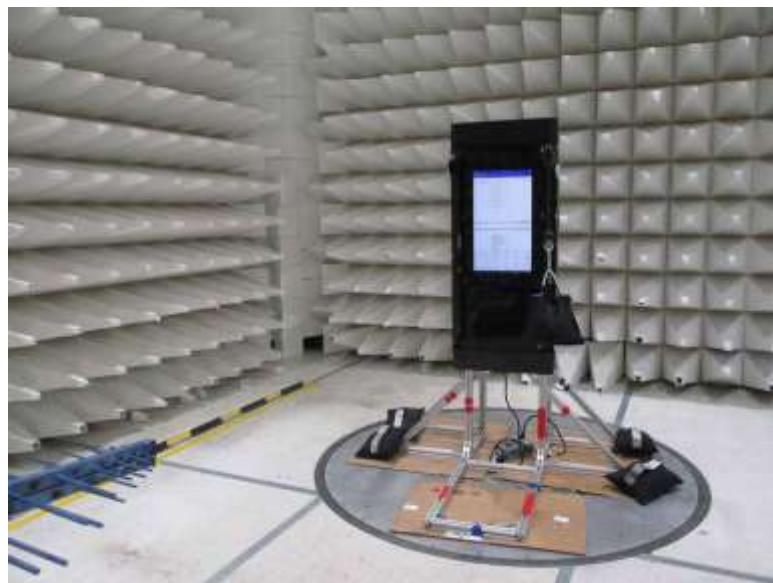


Front View



Back View

1GHz-12GHz

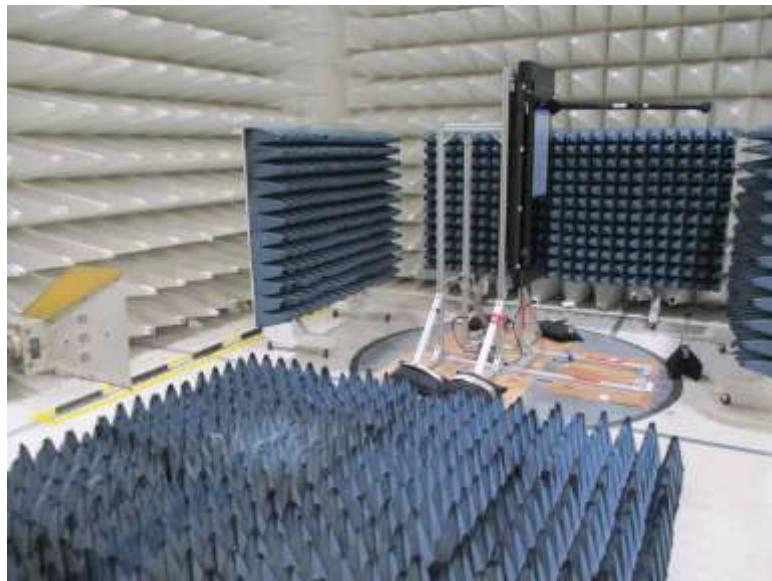


Front View




Back View

12GHz-40GHz

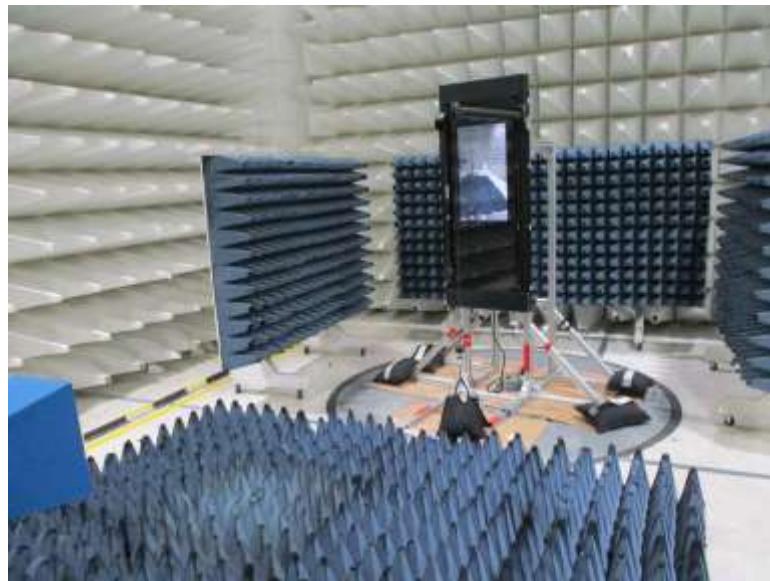

Front View

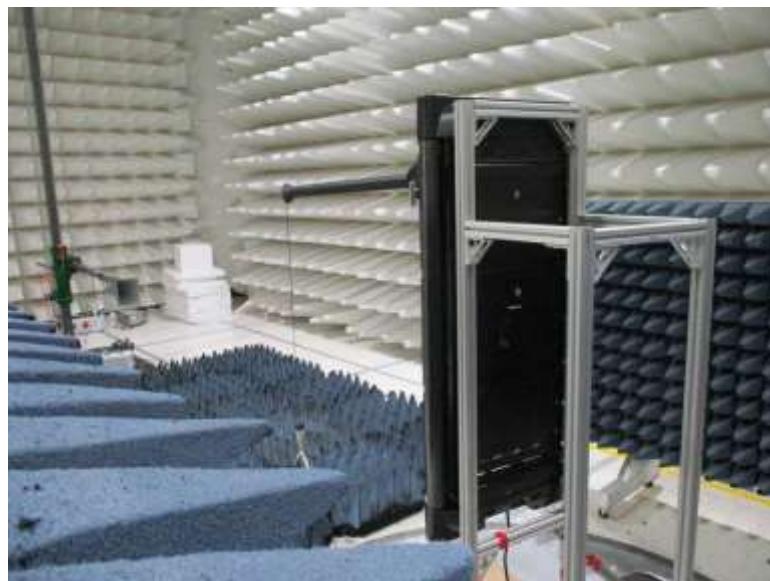

Back View

15.207 AC Conducted Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **110285** Date: 10/17/2024
 Test Type: **Conducted Emissions** Time: 13:46:52
 Tested By: Hieu Song Nguyenpham Sequence#: 170
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission
 Frequency Range: 150kHz to 30MHz

Test Environment Conditions:
 Temperature: 21.6°C
 Humidity: 49%
 Atmospheric Pressure: 101.4kPa

Highest Generation Frequency: 5.825GHz
 Test Method: ANSI C63.10 (2020)

The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. It is set in a testing mode, lifting a weight on a loop. Video and Camera are On
 All WIFI and Bluetooth modules are on

Modification #1 was in place during testing.

--	--	--	--	--	--

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP01211	Attenuator	23-10-34	12/2/2022	12/2/2024
T2	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T3	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
T4	AN03814	50uH LISN-1PH- Line (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN03814	50uH LISN-1PH- Neutral (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T5	ANP05258	High Pass Filter	HE9615-150K- 50-720B	5/6/2024	5/6/2026

Measurement Data:			Reading listed by margin.				Test Lead: Line				
#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar
1	254.718k QP	46.8 +0.1	+9.9	+0.1	+0.0	+0.0	+0.0	56.9	61.6	-4.7	Line
2	254.718k Ave	36.2 +0.1	+9.9	+0.1	+0.0	+0.0	+0.0	46.3	51.6	-5.3	Line
^	254.718k	48.1 +0.1	+9.9	+0.1	+0.0	+0.0	+0.0	58.2	51.6	+6.6	Line
4	758.671k QP	39.7 +0.2	+9.9	+0.1	+0.0	+0.1	+0.0	50.0	56.0	-6.0	Line
5	4.237M Ave	29.0 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	39.4	46.0	-6.6	Line
6	2.485M QP	39.0 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	49.2	56.0	-6.8	Line
7	1.494M QP	38.2 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	48.4	56.0	-7.6	Line
8	3.501M QP	36.2 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	46.6	56.0	-9.4	Line
9	758.671k Ave	26.2 +0.2	+9.9	+0.1	+0.0	+0.1	+0.0	36.5	46.0	-9.5	Line
^	758.671k	41.9 +0.2	+9.9	+0.1	+0.0	+0.1	+0.0	52.2	46.0	+6.2	Line
11	1.494M Ave	25.7 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	35.9	46.0	-10.1	Line
^	1.494M	41.0 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	51.2	46.0	+5.2	Line
13	2.744M Ave	25.6 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	35.8	46.0	-10.2	Line
14	3.739M QP	34.7 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	45.1	56.0	-10.9	Line
15	4.041M QP	34.1 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	44.5	56.0	-11.5	Line
16	4.237M QP	33.9 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	44.3	56.0	-11.7	Line
^	4.237M	41.2 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	51.6	46.0	+5.6	Line
18	6.463M QP	37.8 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	48.2	60.0	-11.8	Line
19	2.485M Ave	22.7 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	32.9	46.0	-13.1	Line
^	2.485M	41.1 +0.1	+9.9	+0.1	+0.0	+0.1	+0.0	51.3	46.0	+5.3	Line
21	3.739M Ave	22.2 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	32.6	46.0	-13.4	Line
^	3.739M	42.0 +0.1	+9.9	+0.2	+0.1	+0.1	+0.0	52.4	46.0	+6.4	Line



23	2.744M	31.3	+9.9	+0.1	+0.0	+0.1	+0.0	41.5	56.0	-14.5	Line
QP			+0.1								
^	2.744M	36.6	+9.9	+0.1	+0.0	+0.1	+0.0	46.8	46.0	+0.8	Line
			+0.1								
25	3.501M	20.9	+9.9	+0.2	+0.1	+0.1	+0.0	31.3	46.0	-14.7	Line
Ave			+0.1								
^	3.501M	39.8	+9.9	+0.2	+0.1	+0.1	+0.0	50.2	46.0	+4.2	Line
			+0.1								
27	6.463M	24.3	+9.9	+0.2	+0.1	+0.1	+0.0	34.7	50.0	-15.3	Line
Ave			+0.1								
^	6.463M	41.7	+9.9	+0.2	+0.1	+0.1	+0.0	52.1	50.0	+2.1	Line
			+0.1								
29	4.041M	20.2	+9.9	+0.2	+0.1	+0.1	+0.0	30.6	46.0	-15.4	Line
Ave			+0.1								
^	4.041M	39.1	+9.9	+0.2	+0.1	+0.1	+0.0	49.5	46.0	+3.5	Line
			+0.1								



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: **15.207 AC Mains - Average**
Work Order #: **110285** Date: 10/17/2024
Test Type: **Conducted Emissions** Time: 14:16:33
Tested By: Hieu Song Nguyenpham Sequence#: 171
Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 150kHz to 30MHz
Test Environment Conditions: Temperature: 21.6°C Humidity: 49% Atmospheric Pressure: 101.4kPa
Highest Generation Frequency: 5.825GHz Test Method: ANSI C63.10 (2020)
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. It is set in a testing mode, lifting a weight on a loop. Video and Camera are On All WIFI and Bluetooth modules are on
<u>Modification #1 was in place during testing.</u>

<input checked="" type="checkbox"/>					
-------------------------------------	--	--	--	--	--

Test Equipment:


ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP01211	Attenuator	23-10-34	12/2/2022	12/2/2024
T2	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T3	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
	AN03814	50uH LISN-1PH- Line (dB)	NSLK 8126	1/4/2023	1/4/2025
T4	AN03814	50uH LISN-1PH- Neutral (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T5	ANP05258	High Pass Filter	HE9615-150K- 50-720B	5/6/2024	5/6/2026

Measurement Data:			Reading listed by margin.				Test Lead: Neutral				
#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar
1	3.722M	38.8	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	49.2	56.0	-6.8	Neutr
	QP										
2	255.445k	44.0	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	54.0	61.6	-7.6	Neutr
	QP										
3	255.445k	33.3	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	43.3	51.6	-8.3	Neutr
	Ave										
^	255.445k	44.9	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	54.9	51.6	+3.3	Neutr
5	1.485M	37.4	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	47.6	56.0	-8.4	Neutr
	QP										
6	2.489M	37.3	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	47.5	56.0	-8.5	Neutr
	QP										
7	761.580k	36.7	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	46.9	56.0	-9.1	Neutr
	QP										
8	2.961M	36.2	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	46.4	56.0	-9.6	Neutr
	QP										
9	6.449M	38.5	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	48.9	60.0	-11.1	Neutr
	QP										
10	506.032k	34.5	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	44.7	56.0	-11.3	Neutr
	QP										
11	3.722M	23.3	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	33.7	46.0	-12.3	Neutr
	Ave										
^	3.722M	42.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.6	46.0	+6.6	Neutr
13	506.032k	22.6	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	32.8	46.0	-13.2	Neutr
	Ave										
^	506.032k	38.9	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	49.1	46.0	+3.1	Neutr
15	761.580k	22.4	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	32.6	46.0	-13.4	Neutr
	Ave										
^	761.580k	39.4	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	49.6	46.0	+3.6	Neutr
17	2.489M	21.8	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	32.0	46.0	-14.0	Neutr
	Ave										
^	2.489M	41.5	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.7	46.0	+5.7	Neutr
19	6.449M	25.0	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	35.4	50.0	-14.6	Neutr
	Ave										
^	6.449M	42.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.6	50.0	+2.6	Neutr
21	1.485M	21.0	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	31.2	46.0	-14.8	Neutr
	Ave										
^	1.485M	41.5	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.7	46.0	+5.7	Neutr




23	2.961M	20.6	+9.9	+0.1	+0.0	+0.1	+0.0	30.8	46.0	-15.2	Neutr
	Ave		+0.1								
^	2.961M	38.9	+9.9	+0.1	+0.0	+0.1	+0.0	49.1	46.0	+3.1	Neutr
+0.1											
25	3.705M	29.2	+9.9	+0.2	+0.1	+0.1	+0.0	39.6	56.0	-16.4	Neutr
	QP		+0.1								
26	3.705M	17.9	+9.9	+0.2	+0.1	+0.1	+0.0	28.3	46.0	-17.7	Neutr
	Ave		+0.1								
^	3.705M	39.7	+9.9	+0.2	+0.1	+0.1	+0.0	50.1	46.0	+4.1	Neutr
+0.1											

Test Setup Photo(s)

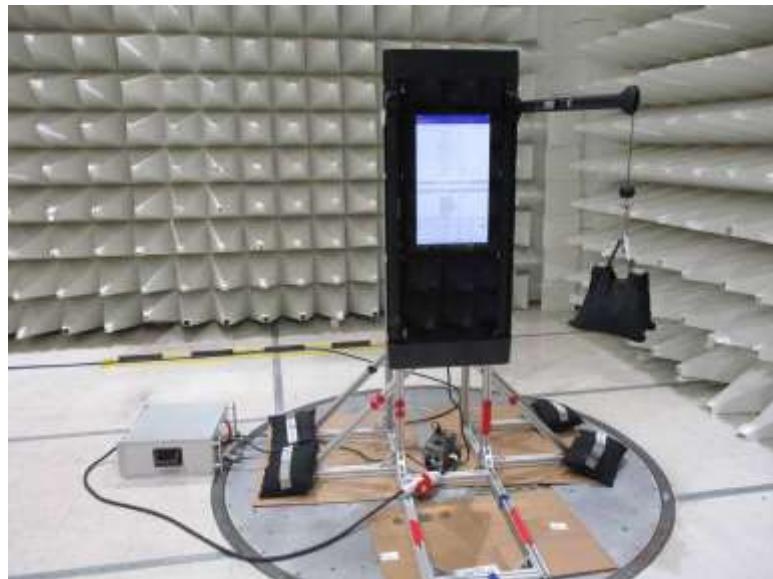

Front View

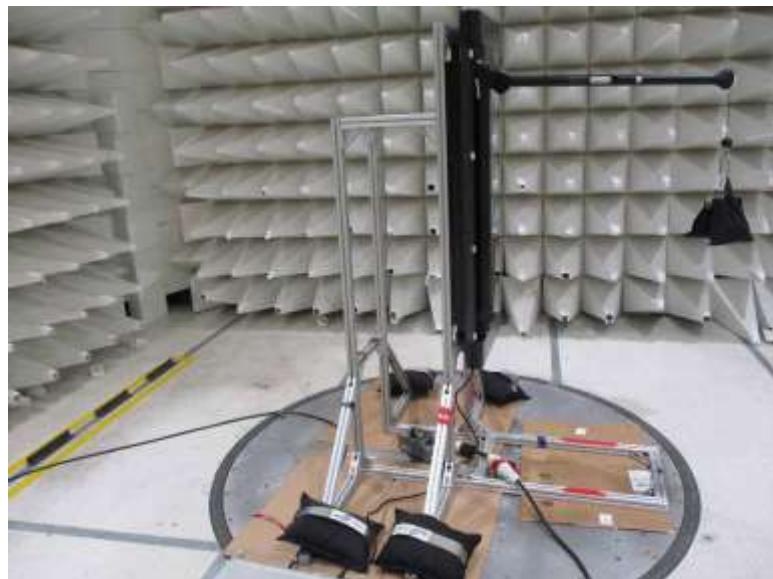

Side View

APPENDIX A: MODIFICATIONS MADE DURING TESTING

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Summary of Conditions

Modification #1 (Mod#1) = Added a ferrite (Wurth: 742 712 21) on lower resistor wire. Green Resistor.
--

Modifications listed above must be incorporated into all production units.



Modification #1

Supplemental Information

Measurement Uncertainty

Uncertainty Value	Parameter
5.77 dB	Radiated Emissions
0.673 dB	RF Conducted Measurements
5.77×10^{-10}	Frequency Deviation
0.00005 s	Time Deviation
3.18 dB	Mains Conducted Emissions

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	($\text{dB}\mu\text{V}$)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.

End of Report