

SHAOXING SHANGYU HENGDA LIGHTING CO.,LTD

RF TEST REPORT

Report Type:

FCC Part 15C RF report

Model:

HD1903W, HD1908W

REPORT NUMBER:

200802833SHA-001

ISSUE DATE:

Sep 25, 2020

DOCUMENT CONTROL NUMBER:

TTRFFCCPART15C_V1 © 2018 Intertek



Applicant: SHAOXING SHANGYU HENGDA LIGHTING CO.,LTD
LUZE WEST ROAD,LIANGHU INDUSTRIAL ZONE,SHANGYU,SHAOXING
CITY,ZHEJIANG,CHINA

Manufacturer: SHAOXING SHANGYU HENGDA LIGHTING CO.,LTD
LUZE WEST ROAD,LIANGHU INDUSTRIAL ZONE,SHANGYU,SHAOXING
CITY,ZHEJIANG,CHINA

Manufacturing site: SHAOXING SHANGYU HENGDA LIGHTING CO.,LTD
LUZE WEST ROAD,LIANGHU INDUSTRIAL ZONE,SHANGYU,SHAOXING
CITY,ZHEJIANG,CHINA

FCC ID: 2AXLS-1908W1903W

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:

REVIEWED BY:



Project Engineer
Teddy Yin



Reviewer
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY..... 4

MEASUREMENT RESULT SUMMARY 5

1 GENERAL INFORMATION 6

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 6

1.2 TECHNICAL SPECIFICATION 6

1.3 DESCRIPTION OF TEST FACILITY 7

2 TEST SPECIFICATIONS..... 8

2.1 STANDARDS OR SPECIFICATION 8

2.2 MODE OF OPERATION DURING THE TEST..... 8

2.3 TEST SOFTWARE LIST 8

2.4 TEST PERIPHERALS LIST 8

2.5 TEST ENVIRONMENT CONDITION:..... 8

2.6 INSTRUMENT LIST 9

2.7 MEASUREMENT UNCERTAINTY 10

3 RADIATED EMISSIONS 11

3.1 LIMIT 11

3.2 MEASUREMENT PROCEDURE 11

3.3 TEST CONFIGURATION 12

3.4 TEST RESULTS OF RADIATED EMISSIONS 14

4 CONDUCTED EMISSIONS 16

4.1 LIMIT 16

4.2 TEST CONFIGURATION 16

4.3 MEASUREMENT PROCEDURE 17

4.4 TEST RESULTS OF CONDUCTED EMISSIONS..... 18

Revision History

Report No.	Version	Description	Issued Date
200802833SHA-001	Rev. 01	Initial issue of report	Sep 25, 2020

TEST REPORT**Measurement result summary**

TEST ITEM	FCC REFERANCE	RESULT
Radiated emissions	15.209	Pass
Conducted emissions	15.207	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	LED TABLE LAMP
Type/Model:	HD1903W, HD1908W
Description of EUT:	EUT is a LED table lamp with wireless charge function. Both models have the same wireless charging circuit. HD1903W uses alternative adaptor: KDP-AE050300U or GP-SW050DC3000(US). HD1908W uses alternative adaptor: KDP-AE150150U or GP-SW150DC1500(US). Both models were tested, and the worst data is listed in the report.
Rating:	120Vac, 60Hz, 0.6A, 7W(HD1903W), 120Vac, 60Hz, 0.8A, 13W(HD1908W) Wireless charge output: DC 5V/1A, USB output: DC 5V/1A Adaptor for HD1903W: KDP-AE050300U: Input: 100-240V~, 50/60Hz, 0.6A Output: DC 5V, 3000mA or GP-SW050DC3000(US): Input: 120V~, 50/60Hz, 0.5A Output: DC 5V, 3000mA Adaptor for HD1908W: KDP-AE150150U: Input: 100-240V~, 50/60Hz, 0.8A Output: DC 15V, 1500mA or GP-SW150DC1500(US): Input: 120V~, 50/60Hz, 0.5A Output: DC 15V, 1500mA
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	Aug 29, 2020
Date of test:	Aug 29~Sep 15, 2020

1.2 Technical Specification

Frequency Range:	110kHz – 205kHz
------------------	-----------------

TEST REPORT

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2019)
ANSI C63.10 (2013)

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Brand and Model	Description
1	Wireless load	/	100% power level
2	Wireless load	/	50% power level
3	Wireless load	/	0% power level

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	25°C	55% RH
Power line conducted emission	25°C	55% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2021-07-08
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2020-11-10
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2021-01-12
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2020-09-16
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2021-03-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2020-09-25
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross	-	EC 3048	2021-07-14
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2021-03-03
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3481	2021-01-05

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

TEST REPORT

3 Radiated emissions

Test result: Pass

3.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

3.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

TEST REPORT


- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported


3.3 Test Configuration

For Radiated emission below 30MHz:

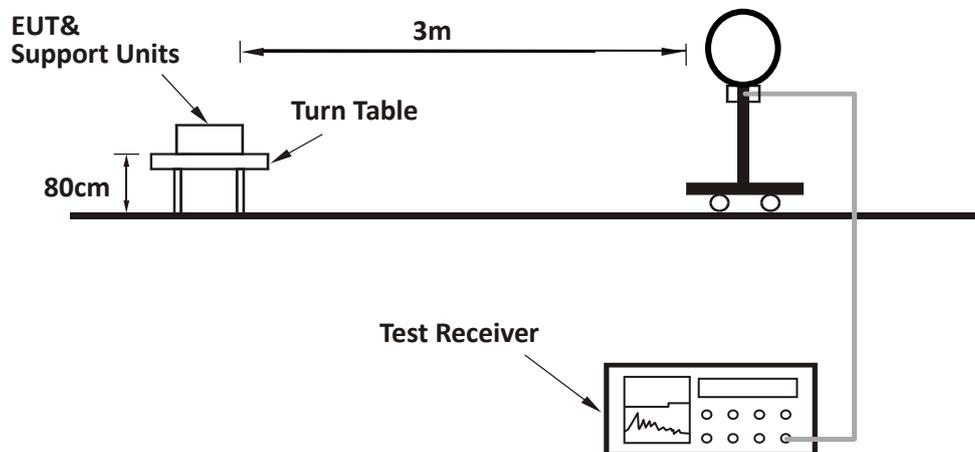


TEST REPORT

For Radiated emission 30MHz to 1GHz:

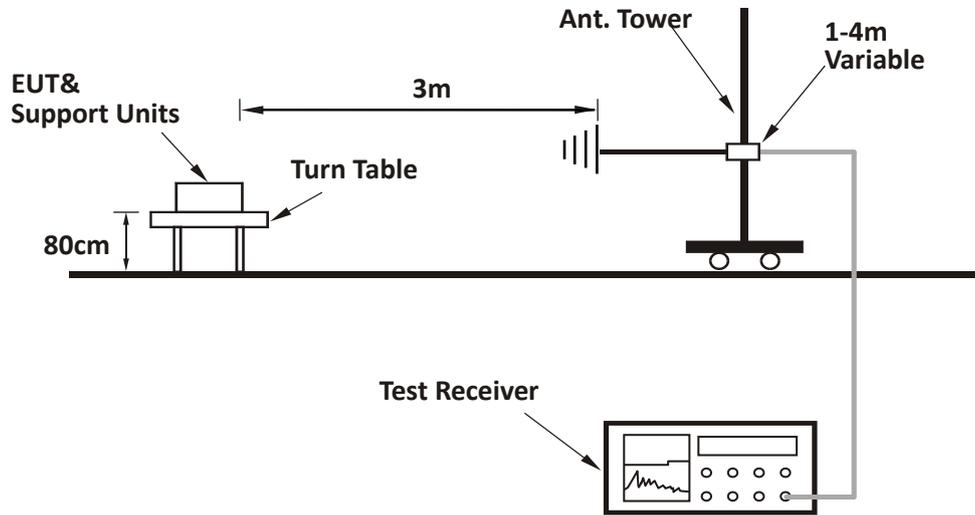

For Radiated emission above 1GHz:

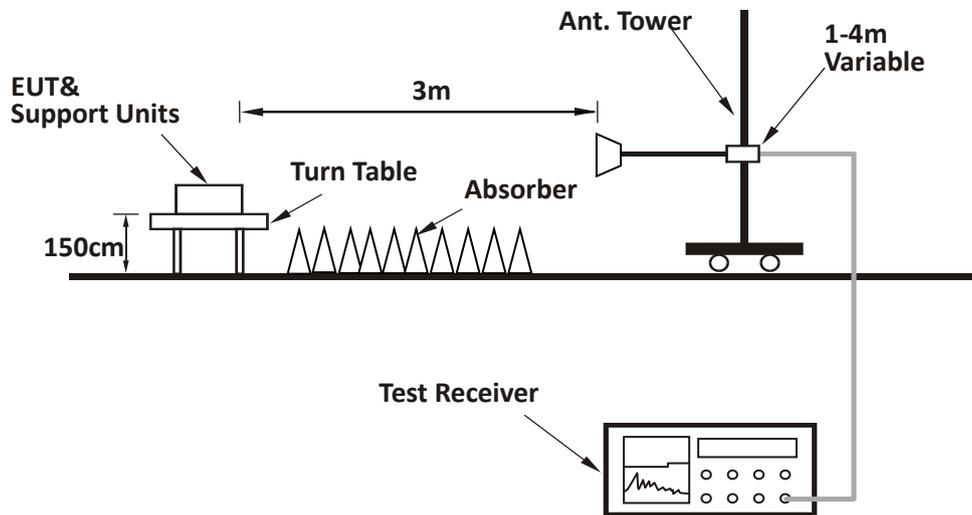

TEST REPORT

3.4 Test Results of Radiated Emissions

EUT was tested with empty load, half load and full load, the full load is the worst case and we listed the results in the report.

Model: HD1903W

Test data below 30MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector	Remark
X	0.12	79.10	20.20	92.10	13.00	PK	Fundamental
X	0.21	66.50	20.10	82.30	15.80	PK	Spurious
X	0.81	52.60	20.20	58.90	6.30	PK	Spurious
X	1.29	37.90	20.40	50.80	12.90	PK	Spurious
X	7.33	39.10	20.30	59.10	20.00	PK	Spurious
Y	0.12	74.30	20.20	92.10	17.80	PK	Fundamental
Y	0.33	54.50	20.10	74.50	20.00	PK	Spurious
Y	0.81	53.30	20.20	58.90	5.60	PK	Spurious
Y	1.59	33.80	20.40	47.20	13.40	PK	Spurious
Y	7.33	49.70	20.30	59.10	9.40	PK	Spurious

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	30.00	22.00	19.40	40.00	18.00	PK
H	140.80	25.10	12.50	43.50	18.40	PK
H	228.28	34.60	11.50	46.00	11.40	PK
H	321.58	37.80	15.40	46.00	8.20	PK
H	352.69	33.70	16.30	46.00	12.30	PK
H	957.23	30.20	24.20	46.00	15.80	PK
V	31.94	32.60	18.10	40.00	7.40	PK
V	117.47	30.60	13.10	43.50	12.90	PK
V	160.24	31.60	11.20	43.50	11.90	PK
V	210.78	31.50	10.80	43.50	12.00	PK
V	333.25	30.30	15.80	46.00	15.70	PK
V	949.46	31.10	24.10	46.00	14.90	PK

TEST REPORT

Model: HD1908W

Test data below 30MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector	Remark
X	0.12	79.20	20.20	91.40	12.20	PK	Fundamental
X	0.21	65.60	20.10	82.30	16.70	PK	Spurious
X	0.81	52.90	20.20	58.90	6.00	PK	Spurious
X	1.65	32.80	20.40	46.60	13.80	PK	Spurious
X	6.97	39.40	20.30	59.10	19.70	PK	Spurious
Y	0.12	74.50	20.20	91.40	16.90	PK	Fundamental
Y	0.21	62.90	20.10	82.30	19.40	PK	Spurious
Y	0.81	53.20	20.20	58.90	5.70	PK	Spurious
Y	1.53	32.30	20.40	47.90	15.60	PK	Spurious
Y	7.33	48.10	20.30	59.10	11.00	PK	Spurious

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	105.81	32.90	12.30	43.50	10.60	PK
H	138.86	32.00	12.60	43.50	11.50	PK
H	243.83	41.20	13.20	46.00	4.80	PK
H	247.72	41.20	13.60	46.00	4.80	PK
H	389.62	40.00	17.30	46.00	6.00	PK
H	941.68	30.80	24.00	46.00	15.20	PK
V	59.16	33.90	7.40	40.00	6.10	PK
V	61.10	33.60	7.30	40.00	6.40	PK
V	105.81	42.10	12.30	43.50	1.40	PK
V	123.31	37.70	13.20	43.50	5.80	PK
V	208.84	40.30	10.80	43.50	3.20	PK
V	379.90	41.30	17.00	46.00	4.70	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

TEST REPORT

4 Conducted emissions


Test result: Pass

4.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.2 Test Configuration

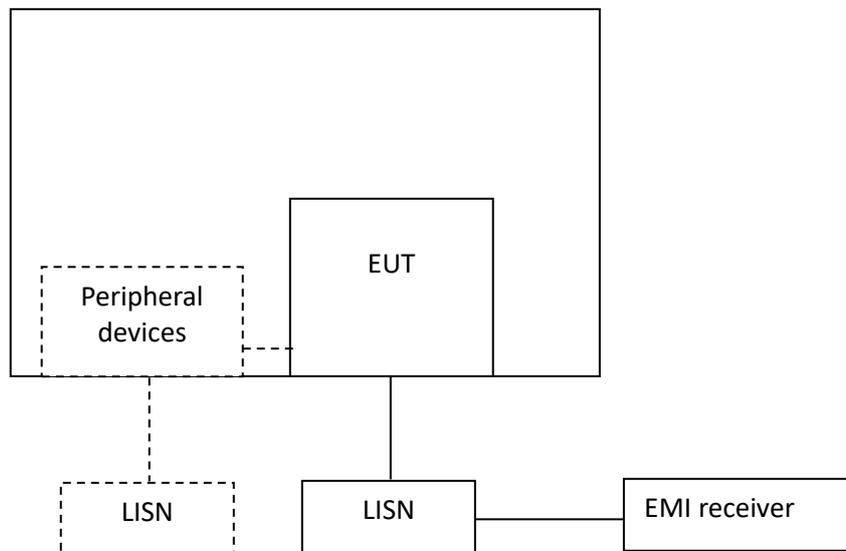

TEST REPORT**4.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

Total Quality. Assured.

TEST REPORT


4.4 Test Results of Conducted Emissions

Model: HD1903W

With adaptor: KDP-AE050300U

Test Curve:

L-Line

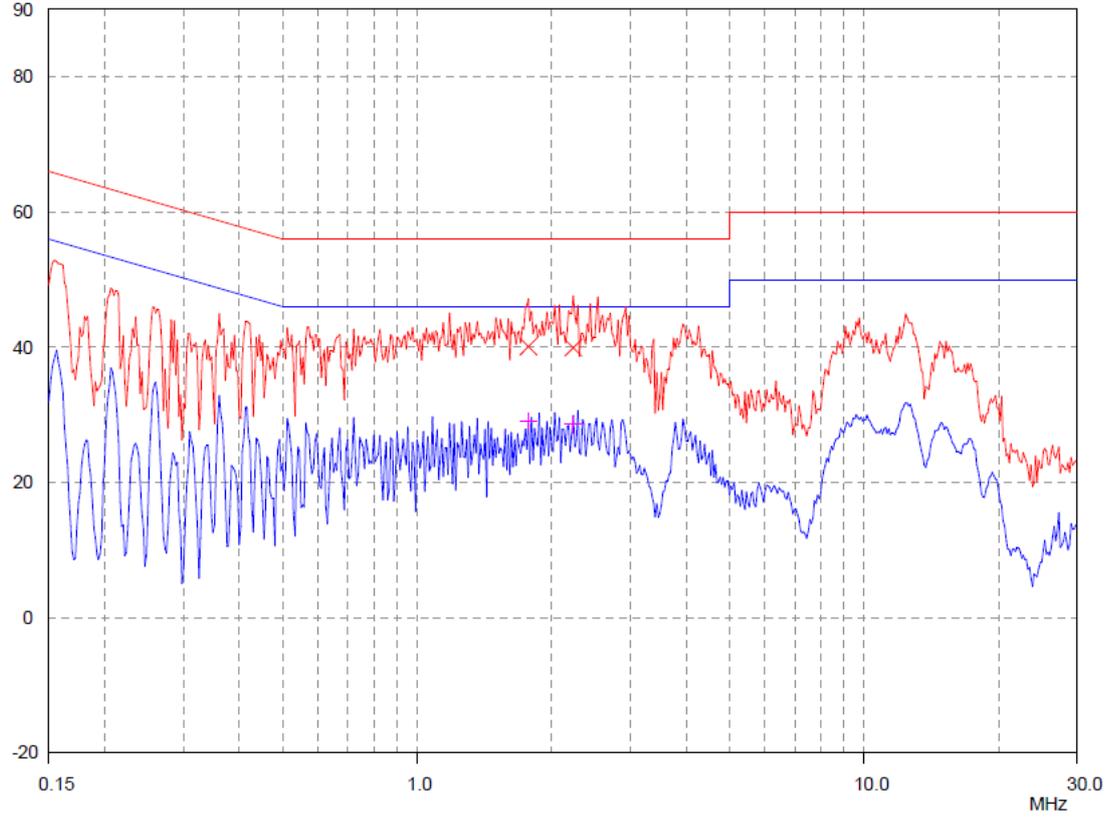


Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.43	*	57.25	*	*	47.25	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

TEST REPORT

N-Line

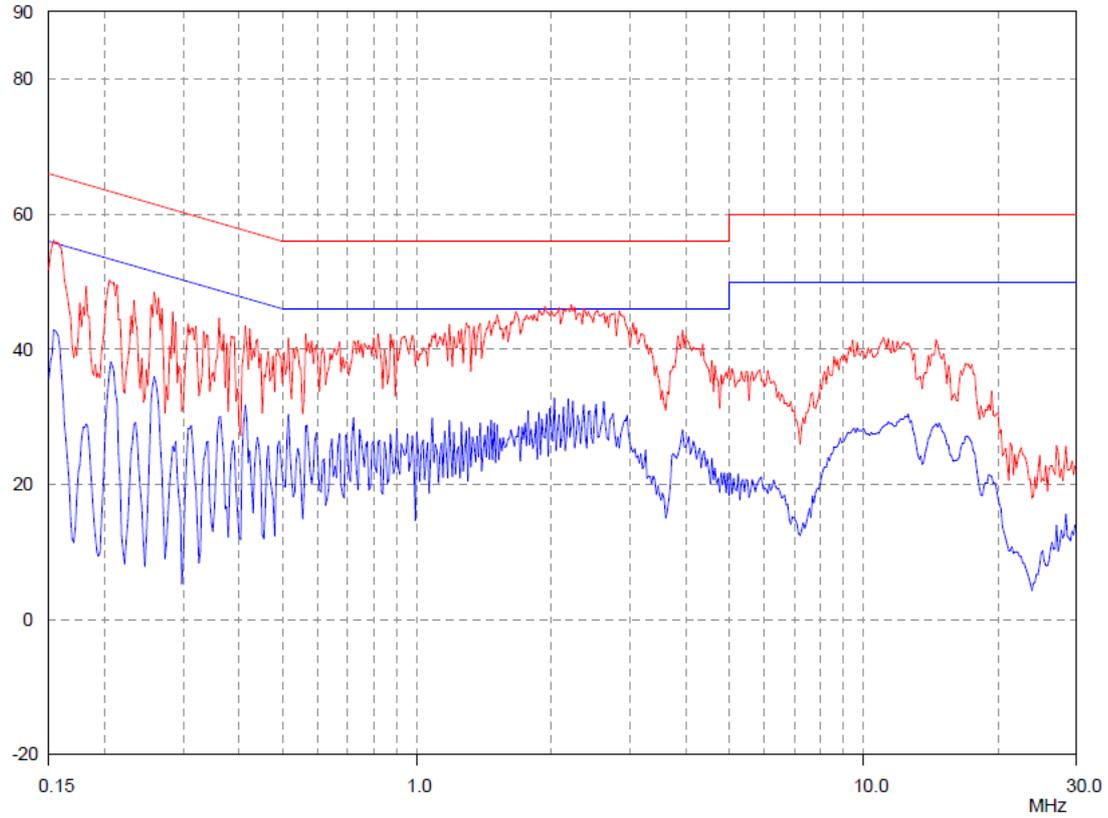

Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.43	*	57.25	*	*	47.25	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.


Total Quality. Assured.

TEST REPORT

With adaptor: GP-SW050DC3000(US)

Test Curve:

L-Line

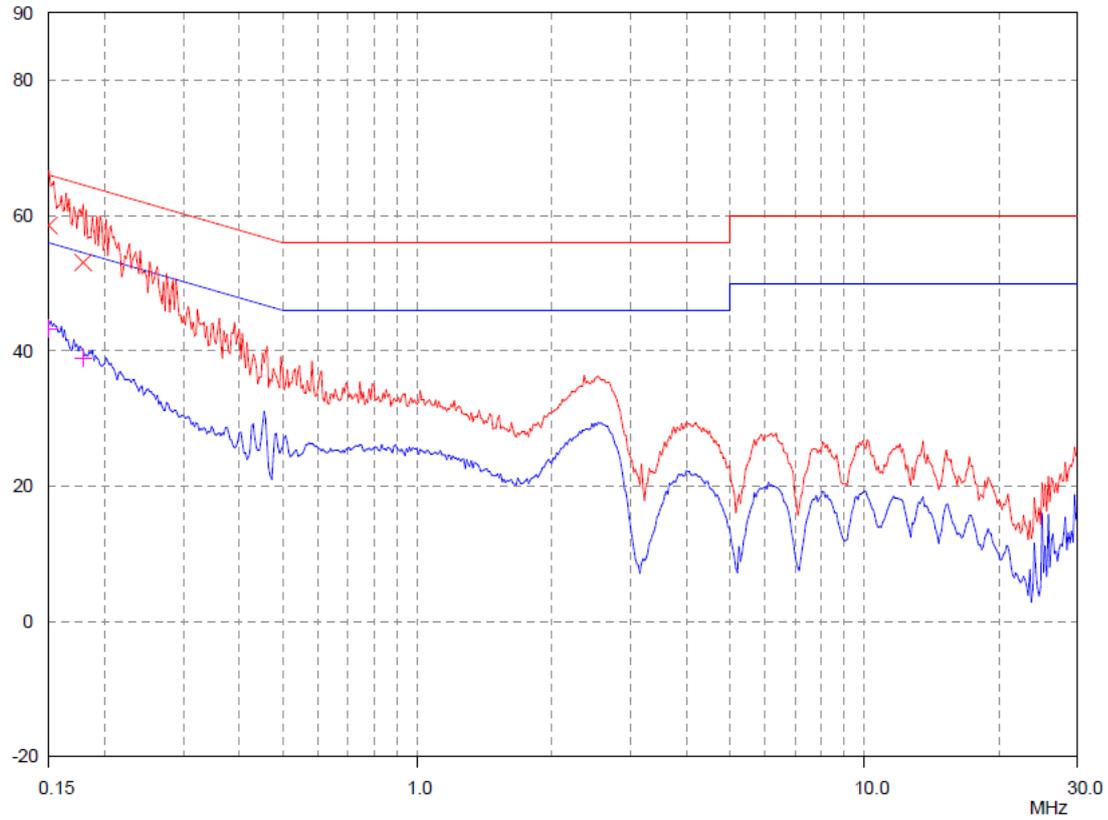


Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.15	58.56	66.00	*	*	56.00	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

TEST REPORT

N-Line

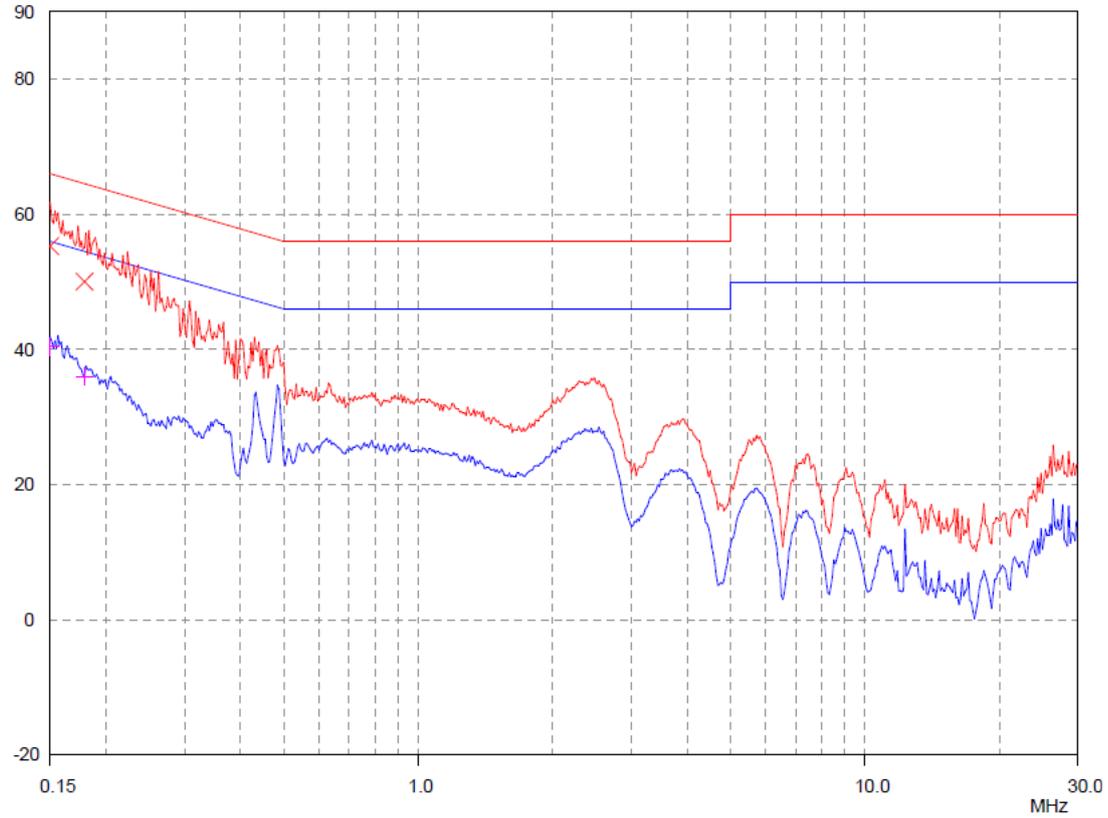

Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.15	*	66.00	*	*	56.00	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

Total Quality. Assured.


TEST REPORT

Model: HD1908W

With adaptor: KDP-AE150150U

Test Curve:

L-Line

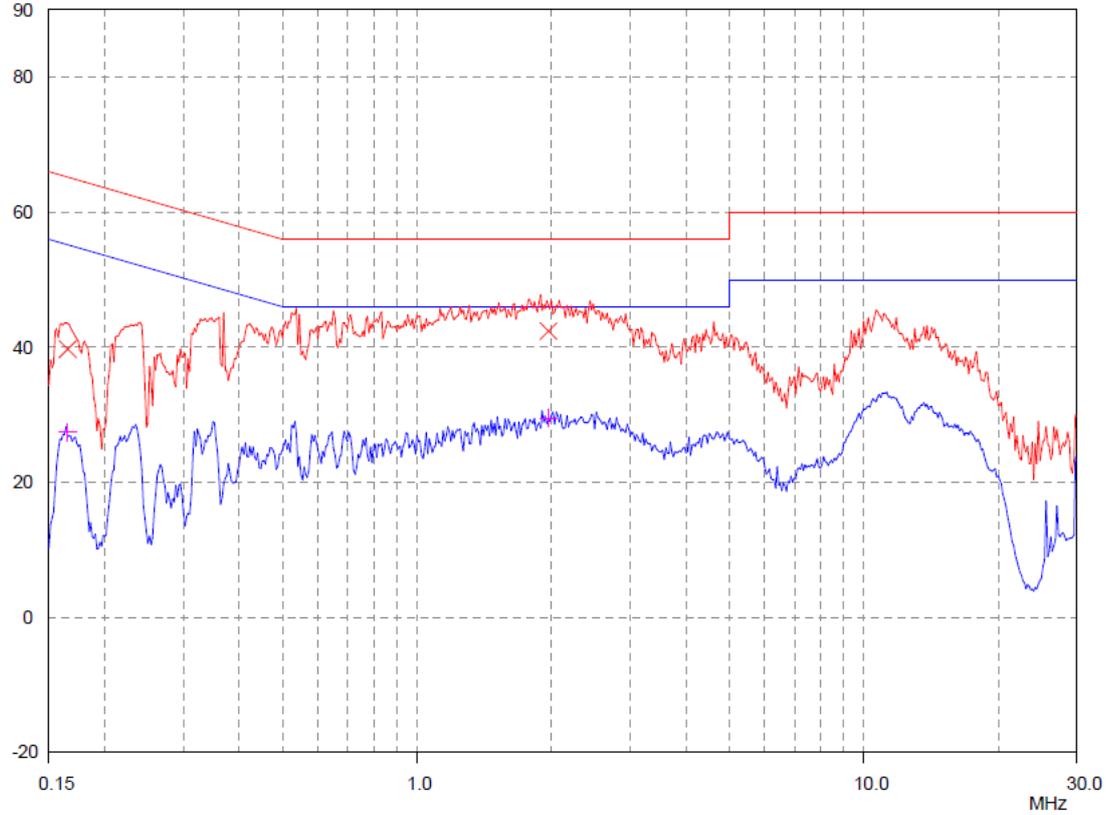


Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.43	*	57.25	*	*	47.25	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

TEST REPORT

N-Line

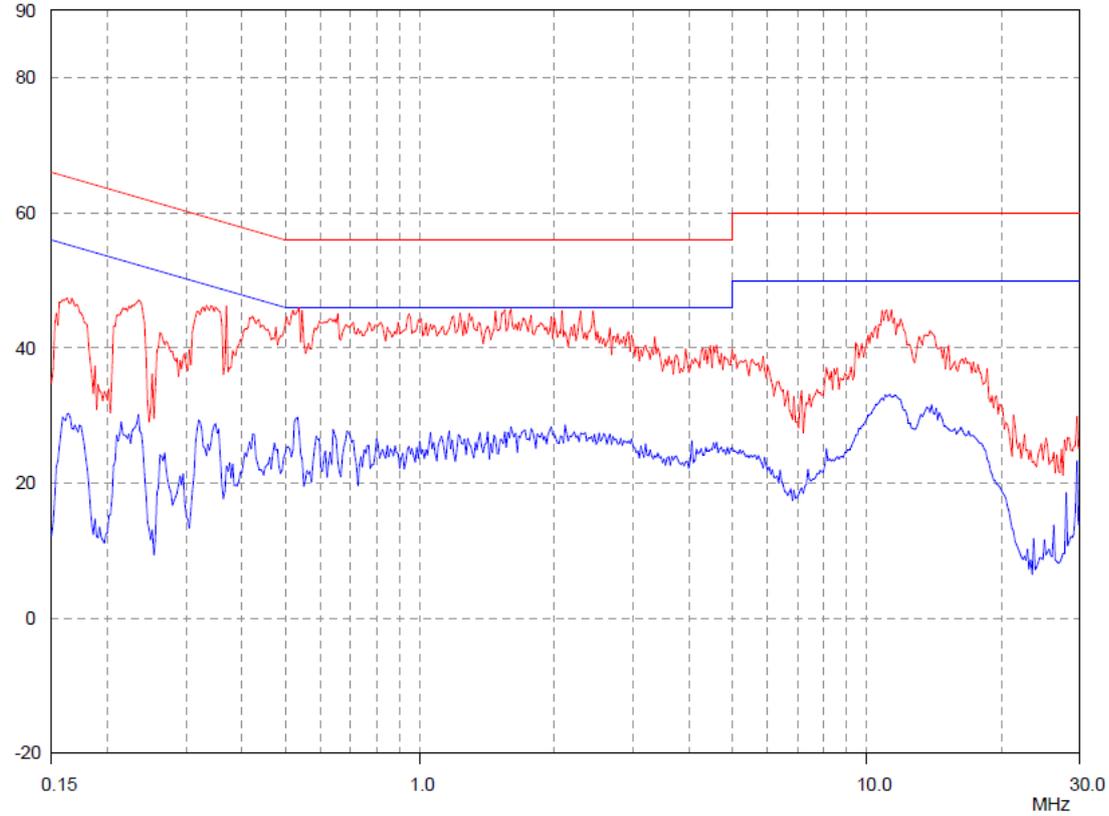

Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.43	*	57.25	*	*	47.25	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*


Note: * means the emission level 10dB below the relevant limit.

TEST REPORT

With adaptor: GP-SW150DC1500(US)

Test Curve:

L-Line

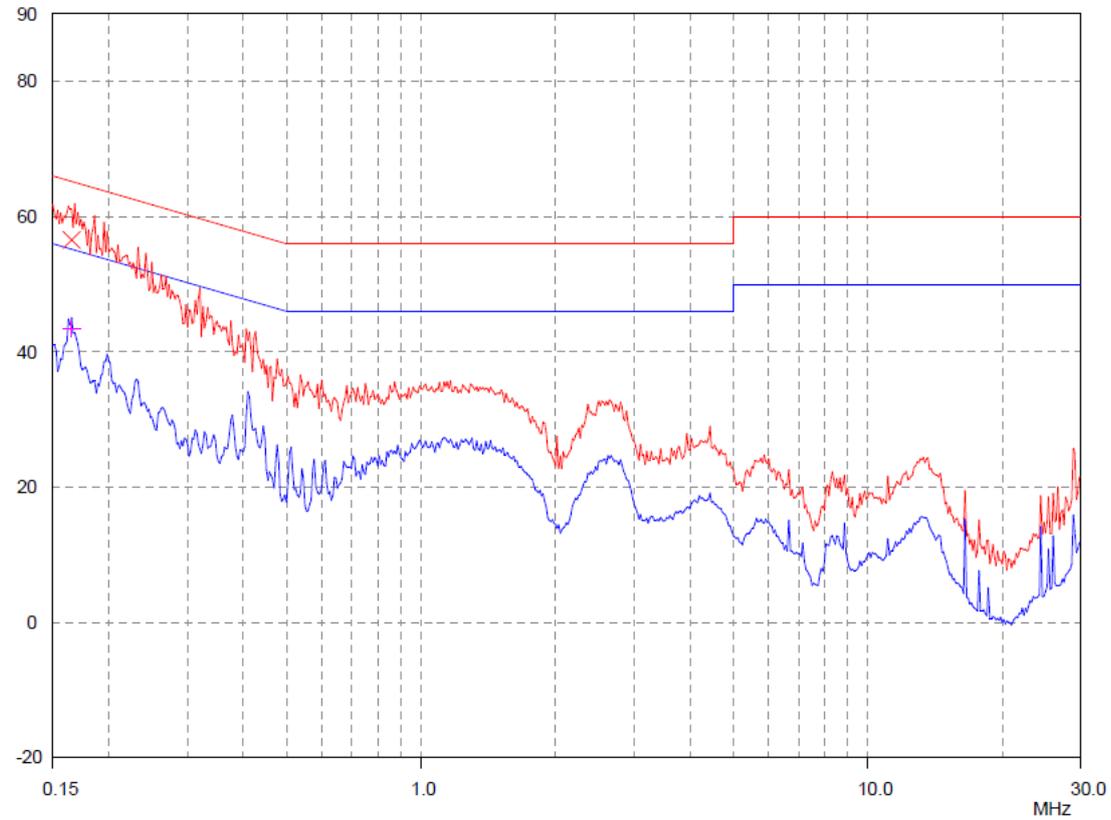


Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.16	56.57	65.21	*	*	55.21	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

TEST REPORT

N-Line

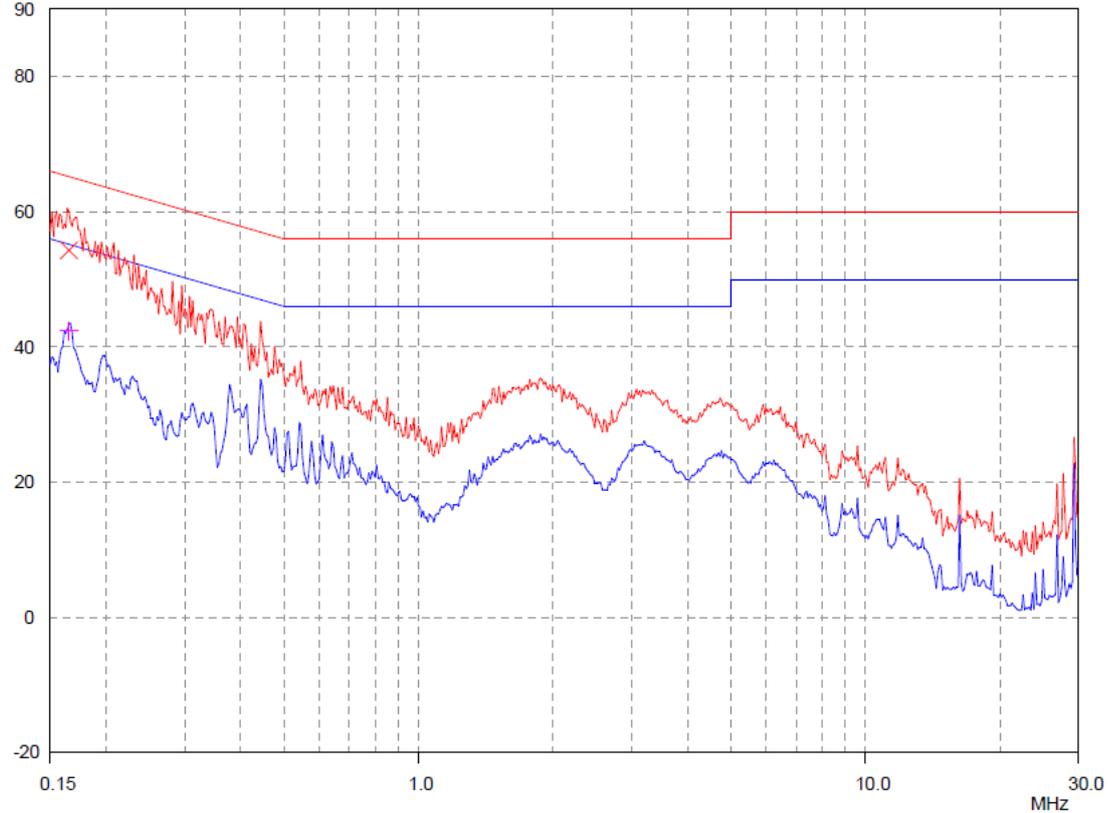

Frequency (MHz)	Quasi-peak			Average		
	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Reading (dBuV)	Limit (dBuV)	Margin (dB)
0.15	*	66.00	*	*	56.00	*
0.72	*	56.00	*	*	46.00	*
1.01	*	56.00	*	*	46.00	*
1.30	*	56.00	*	*	46.00	*
1.58	*	56.00	*	*	46.00	*
28.34	*	60.00	*	*	50.00	*

Note: * means the emission level 10dB below the relevant limit.

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

***** END *****