




element

NAL Research Corporation
SHOUT sp Handheld Iridium Smartphone

FCC 15.247:2021

Bluetooth (FHSS) Radio

Report: PCTE0003.3 Rev. 1, Issue Date: March 11, 2022

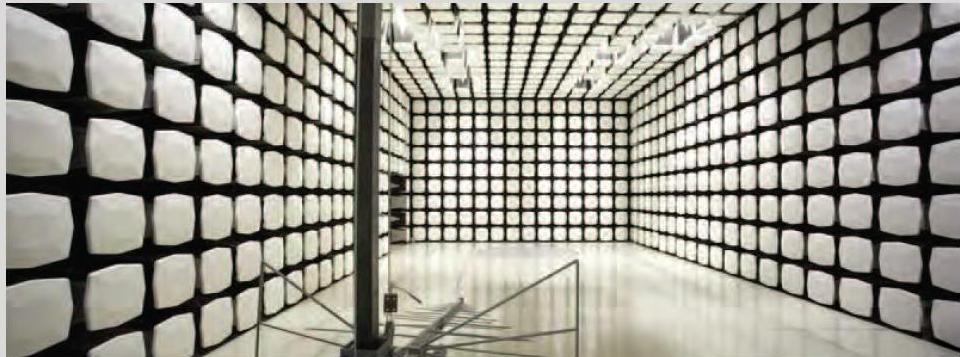

NVLAP[®]
TESTING

NVLAP LAB CODE: 200630-0



This report must not be used to claim product certification, approval, or endorsement by A2LA, NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

CERTIFICATE OF TEST



Last Date of Test: August 30, 2021
NAL Research Corporation
EUT: SHOUT sp Handheld Iridium Smartphone

Radio Equipment Testing

Standards

| Specification | Method |
|-----------------|------------------------------|
| FCC 15.247:2021 | ANSI C63.10:2013, KDB 558074 |

Results

| Method Clause | Test Description | Applied | Results | Comments |
|---------------|-------------------------------------|---------|---------|----------|
| 6.2 | Powerline Conducted Emissions | Yes | Pass | |
| 6.5, 6.6 | Spurious Radiated Emissions | Yes | Pass | |
| 7.5 | Duty Cycle | Yes | N/A | |
| 7.8.2 | Carrier Frequency Separation | Yes | Pass | |
| 7.8.3 | Number of Hopping Frequencies | Yes | Pass | |
| 7.8.4 | Dwell Time | Yes | Pass | |
| 7.8.5 | Output Power | Yes | Pass | |
| 7.8.5 | Equivalent Isotropic Radiated Power | Yes | Pass | |
| 7.8.6 | Band Edge Compliance | Yes | Pass | |
| 7.8.6 | Band Edge Compliance - Hopping Mode | Yes | Pass | |
| 7.8.7 | Occupied Bandwidth | Yes | Pass | |
| 7.8.8 | Spurious Conducted Emissions | Yes | Pass | |

Deviations From Test Standards

None

Approved By:

Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



| Revision Number | Description | Date (yyyy-mm-dd) | Page Number |
|-----------------|---|-------------------|-------------|
| 01 | Updated block diagrams | 2022-03-11 | 7 |
| | Antenna gain in the power settings has been updated to 3 dBi | 2022-03-11 | 14 |
| | Antenna gain has been updated to 3 dBi and final values have been adjusted to account for the change in antenna gain. | 2022-03-11 | 53 |
| | Antenna info has been added to config 10 | 2022-03-11 | 10-13 |
| | AC powerline conducted emissions data has been replaced with new data. | 2022-03-11 | 16-20 |
| | HCI testing has been added to the configurations. | 2022-03-11 | 10-13 |
| | Added both accreditations bodies to the report to reflect Elements transitions to A2LA | 2022-03-11 | 1 |

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)


[Texas](#)

[Washington](#)

FACILITIES



| California | Minnesota | Oregon | Texas | Washington |
|---|---|--|--|---|
| Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918 | Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136 | Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066 | Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255 | Labs NC01-05 19201 120th Ave NE Bothell, WA 98011 (425) 984-6600 |
| A2LA | | | | |
| Lab Code: 3310.04 | Lab Code: 3310.05 | Lab Code: 3310.02 | Lab Code: 3310.03 | Lab Code: 3310.06 |
| Innovation, Science and Economic Development Canada | | | | |
| 2834B-1, 2834B-3 | 2834E-1, 2834E-3 | 2834D-1 | 2834G-1 | 2834F-1 |
| BSMI | | | | |
| SL2-IN-E-1154R | SL2-IN-E-1152R | SL2-IN-E-1017 | SL2-IN-E-1158R | SL2-IN-E-1153R |
| VCCI | | | | |
| A-0029 | A-0109 | A-0108 | A-0201 | A-0110 |
| Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA | | | | |
| US0158 | US0175 | US0017 | US0191 | US0157 |

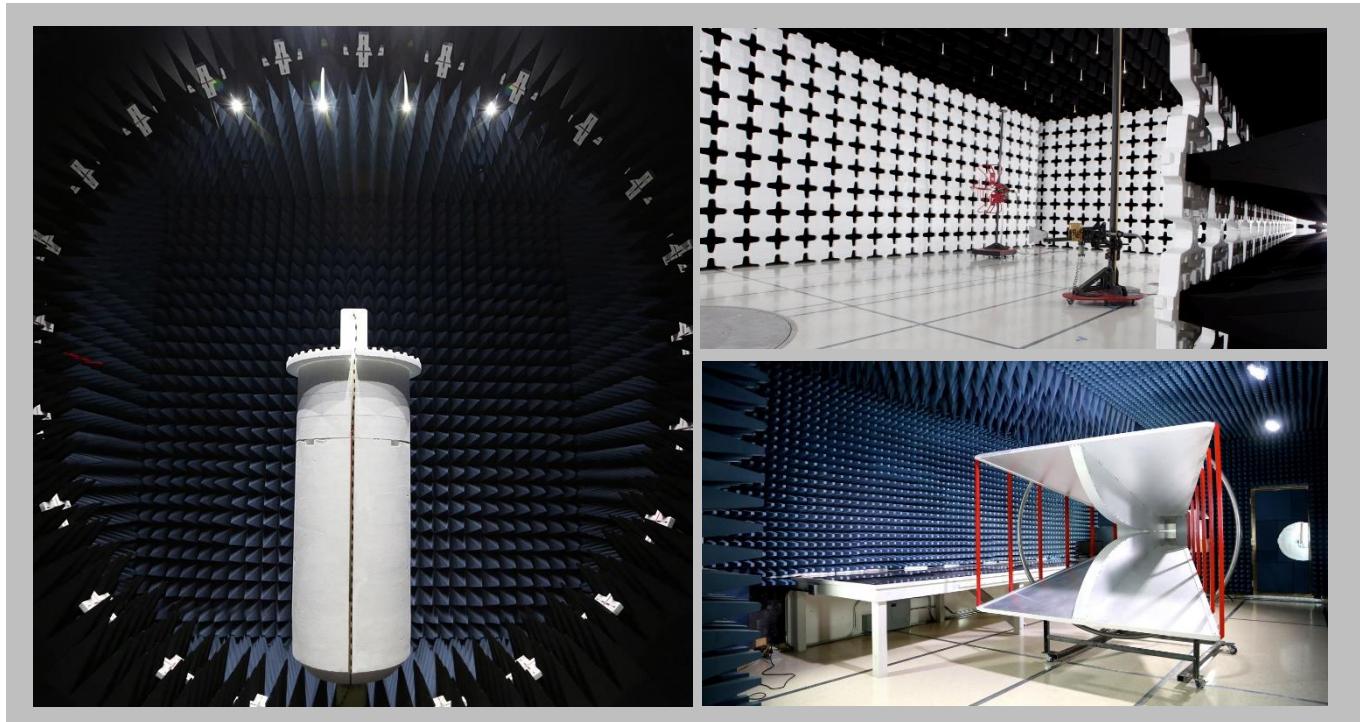

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

| Test | + MU | - MU |
|---------------------------------------|---------|----------|
| Frequency Accuracy | 0.0007% | -0.0007% |
| Amplitude Accuracy (dB) | 1.2 dB | -1.2 dB |
| Conducted Power (dB) | 1.2 dB | -1.2 dB |
| Radiated Power via Substitution (dB) | 0.7 dB | -0.7 dB |
| Temperature (degrees C) | 0.7°C | -0.7°C |
| Humidity (% RH) | 2.5% RH | -2.5% RH |
| Voltage (AC) | 1.0% | -1.0% |
| Voltage (DC) | 0.7% | -0.7% |
| Field Strength (dB) | 5.2 dB | -5.2 dB |
| AC Powerline Conducted Emissions (dB) | 3.2 dB | -3.2 dB |


TEST SETUP BLOCK DIAGRAMS

Measurement Bandwidths

| Frequency Range (MHz) | Peak Data (kHz) | Quasi-Peak Data (kHz) | Average Data (kHz) |
|-----------------------|-----------------|-----------------------|--------------------|
| 0.01 - 0.15 | 1.0 | 0.2 | 0.2 |
| 0.15 - 30.0 | 10.0 | 9.0 | 9.0 |
| 30.0 - 1000 | 100.0 | 120.0 | 120.0 |
| Above 1000 | 1000.0 | N/A | 1000.0 |

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


Antenna Port Conducted Measurements

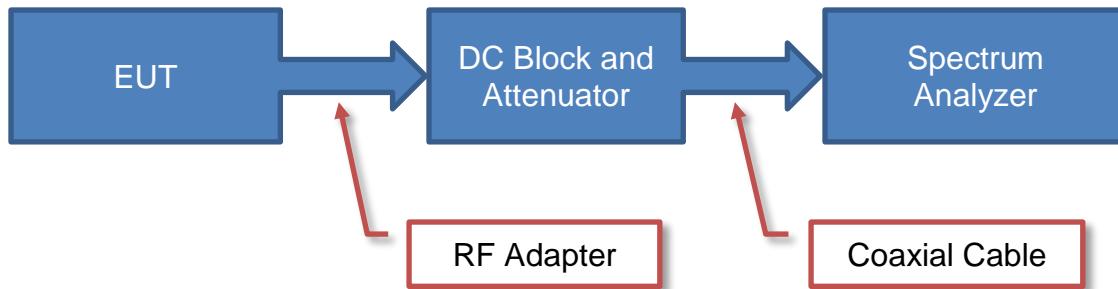

Sample Calculation (logarithmic units)

$$\begin{array}{ccc} \text{Measured} & \text{Measured} & \text{Reference} \\ \text{Value} & = & \text{Level} \\ 71.2 & = & 42.6 \\ & & + \\ & & \text{Level} \\ & & \text{Offset} \\ & & 28.6 \end{array}$$

Near Field Test Fixture Measurements

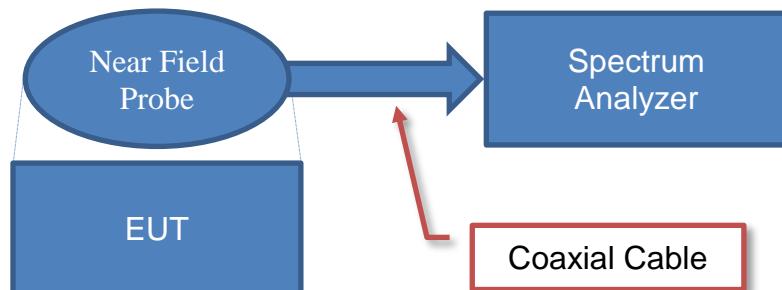


Sample Calculation (logarithmic units)

$$\begin{array}{ccc} \text{Measured} & \text{Measured} & \text{Reference} \\ \text{Value} & = & \text{Level} \\ 71.2 & = & 42.6 \\ & & + \\ & & \text{Level} \\ & & \text{Offset} \\ & & 28.6 \end{array}$$

TEST SETUP BLOCK DIAGRAMS

Emissions Measurements

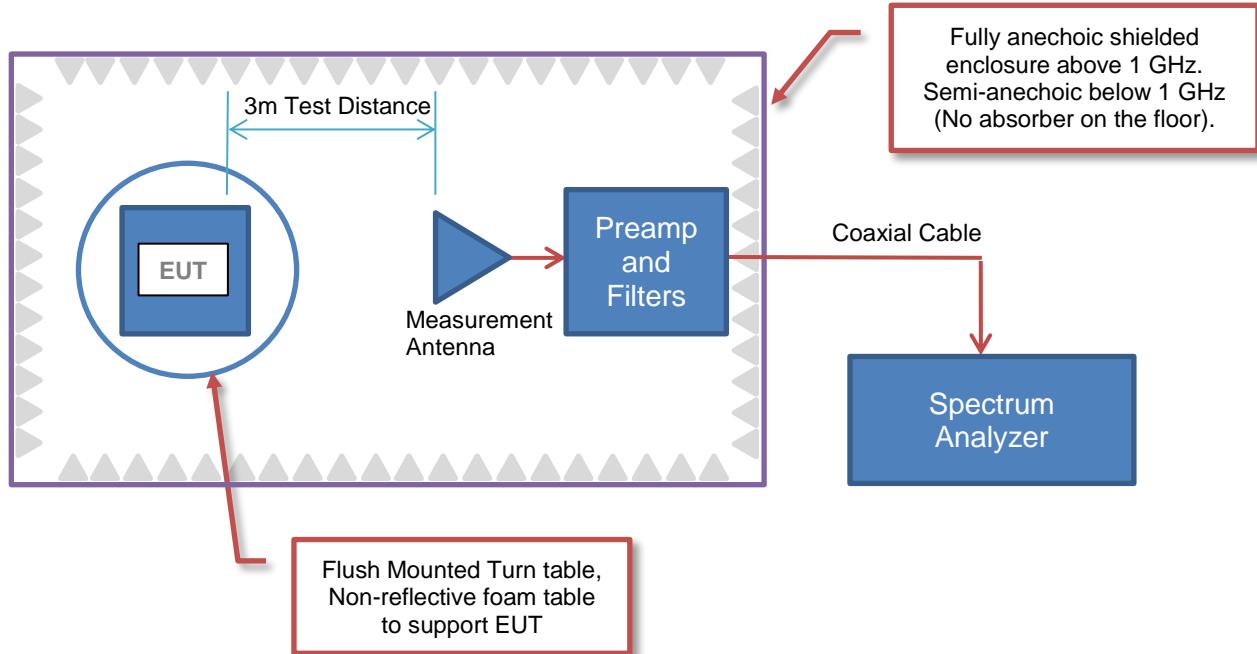

Sample Calculation (logarithmic units)

Radiated Emissions:

| Factor | | | | | | |
|----------------------------|----------------|--------------|----------------|----------------------------|----------------------|----------------|
| Measured Level (Amplitude) | Antenna Factor | Cable Factor | Amplifier Gain | Distance Adjustment Factor | External Attenuation | Field Strength |
| 42.6 | 28.6 | + | 3.1 | - | 40.8 | = 33.5 |


Conducted Emissions:

| Factor | | | | |
|----------------------------|-------------------|--------------|----------------------|----------------|
| Measured Level (Amplitude) | Transducer Factor | Cable Factor | External Attenuation | Adjusted Level |
| 26.7 | 0.3 | + | 0.1 | = 47.1 |

TEST SETUP BLOCK DIAGRAMS

Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

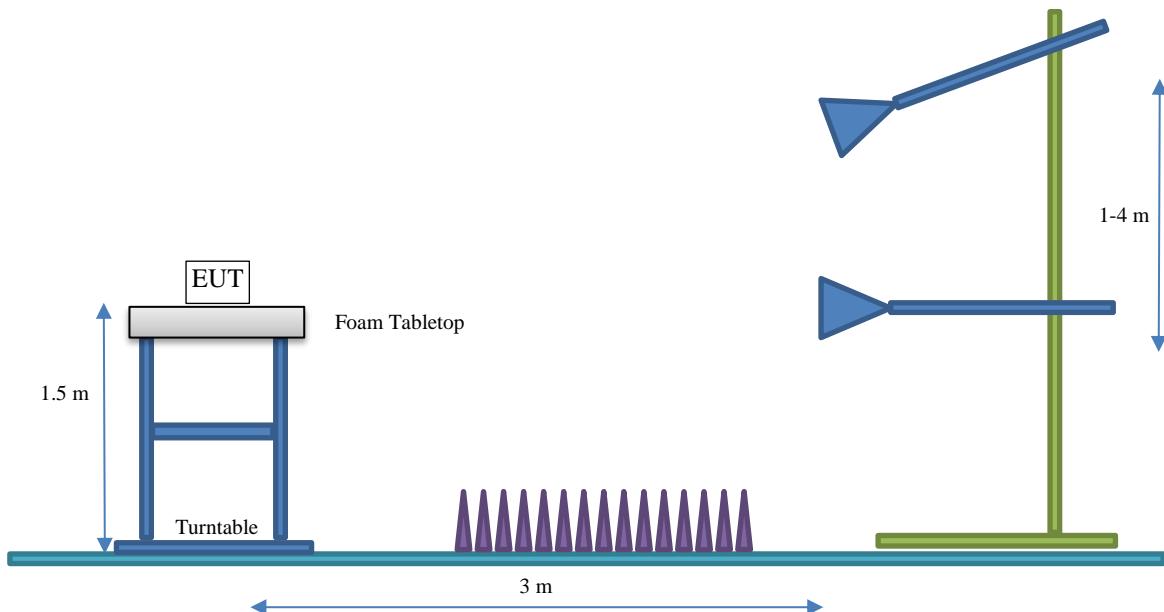

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

| | |
|---------------------------------|--------------------------------------|
| Company Name: | NAL Research Corporation |
| Address: | 11100 Endeavor Ct. Suite 300 |
| City, State, Zip: | Manassas, VA 20109 |
| Test Requested By: | Andy Schiltz |
| EUT: | SHOUT sp Handheld Iridium Smartphone |
| First Date of Test: | May 24, 2021 |
| Last Date of Test: | August 30, 2021 |
| Receipt Date of Samples: | May 24, 2021 |
| Equipment Design Stage: | Production |
| Equipment Condition: | No Damage |
| Purchase Authorization: | Verified |

Information Provided by the Party Requesting the Test

| |
|--|
| Functional Description of the EUT: |
| Handheld Iridium Smartphone with 1.6 GHz radio and 802.11/Bluetooth radio. |
| Testing Objective: |
| To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements. |

CONFIGURATIONS



Configuration PCTE0003- 1

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| HCI Tester | 3.0.0.37 |

| EUT | | | |
|--------------------------------------|--------------------------|-------------------|------------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| SHOUT sp Handheld Iridium Smartphone | NAL Research Corporation | 433-93281-001 | 3000425060205200 |
| Antenna | HARRIS-NEXGEN | 8960263-1 | 18942 |

| Remote Equipment Outside of Test Setup Boundary | | | |
|---|--------------|-------------------|------------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Client Laptop | Lenovo | 81VS | R90YGNE6 |
| USB extension | ANKER | A7516 | ACDPUD0A02200670 |
| Earbuds | Betron | MK23 | None |

| Cables | | | | | |
|-------------------|--------|------------|---------|--------------|--------------------------------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB Cable (Power) | Yes | 3.0 m | No | Phone | USB extension |
| USB Cable x2 | Yes | 1.1 m | No | Phone | Unterminated |
| USB Cable (com) | Yes | 1.1 m | No | Phone | USB extension |
| Headphones | No | 1.2 m | No | Earbuds | SHOUT sp Handheld Iridium Smartphone |

CONFIGURATIONS



Configuration PCTE0003- 3

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| HCI Tester | 3.0.0.37 |

| EUT | | | |
|--------------------------------------|--------------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| SHOUT sp Handheld Iridium Smartphone | NAL Research Corporation | 433-93281-001 | FCC 1 |

| Peripherals in test setup boundary | | | |
|------------------------------------|--------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Laptop | Dell | Inspiron | 20976051206 |
| AC/DC Adapter | Dell | LA45NM140 | None |

| Cables | | | | | |
|-------------------|--------|------------|---------|--------------------------------------|--------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB Cable (Power) | Yes | 1.0 m | No | SHOUT sp Handheld Iridium Smartphone | Laptop |
| AC Power | No | 1.0 m | No | AC/DC Adapter | AC Power |
| DC Power | No | 1.8 m | No | AC/DC Adapter | Laptop |
| USB Cable x2 | Yes | 1.1 m | No | SHOUT sp Handheld Iridium Smartphone | Laptop |
| USB Cable | Yes | 1.1 m | No | SHOUT sp Handheld Iridium Smartphone | Unterminated |

CONFIGURATIONS



Configuration PCTE0003- 10

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| HCI Tester | 3.0.0.37 |

| EUT | | | |
|--------------------------------------|--------------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| SHOUT sp Handheld Iridium Smartphone | NAL Research Corporation | 433-93281-001 | FCC 2 |
| Antenna | HARRIS-NEXGEN | 8960263-1 | 18942 |

| Peripherals in test setup boundary | | | |
|------------------------------------|--------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Laptop | Dell | Latitude E5450 | 5z9B063 |
| Earbuds | Betron | MK23 | None |
| AC Adaptor | SONY | AC-UUD12 | 1910AQ2032484 |

| Cables | | | | | |
|--------------|--------|------------|---------|--------------------------------------|--------------------------------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB Cable x3 | Yes | 1.1 m | No | SHOUT sp Handheld Iridium Smartphone | Laptop |
| USB Cable | Yes | 1.0 m | No | SHOUT sp Handheld Iridium Smartphone | AC Adaptor |
| Headphones | No | 1.2 m | No | Earbuds | SHOUT sp Handheld Iridium Smartphone |

MODIFICATIONS



Equipment Modifications

| Item | Date | Test | Modification | Note | Disposition of EUT |
|------|------------|-------------------------------------|--------------------------------------|---|---|
| 1 | 2020-05-24 | Carrier Frequency Separation | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 2 | 2021-05-24 | Number of Hopping Frequencies | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 3 | 2021-05-24 | Dwell Time | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 4 | 2021-05-24 | Output Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 5 | 2021-05-24 | Equivalent Isotropic Radiated Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 6 | 2021-05-24 | Band Edge Compliance | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 7 | 2021-05-24 | Band Edge Compliance - Hopping Mode | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 8 | 2021-05-24 | Occupied Bandwidth | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 9 | 2021-05-24 | Spurious Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 10 | 2021-08-24 | Spurious Radiated Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 11 | 2021-08-30 | Powerline Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |
| 12 | 2022-03-04 | Powerline Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |

POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

ANTENNA GAIN (dBi)

| Type | Provided by: | Frequency Range (MHz) | Gain (dBi) |
|--------------------|--------------|-----------------------|------------|
| On-ground MID Chip | Manufacturer | 2400 – 2485 | 3.0 |

The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

| Modulation Types | Type | Channel | Frequency (MHz) | Power Setting |
|------------------|------|---------|-----------------|---------------|
| DH5, 2DH5, 3DH5 | FHSS | 0 | Low Channel | 2402 |
| | | 39 | Mid Channel | 2441 |
| | | 79 | High channel | 2480 |

POWERLINE CONDUCTED EMISSIONS



TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|----------------------------------|-------------------|--------------------------------|------|------------|------------|
| Cable - Conducted Cable Assembly | Northwest EMC | EVG, HHD, RKT 9252-50-R-24-BNC | EVGA | 2022-01-04 | 2023-01-04 |
| LISN | Solar Electronics | | LIP | 2021-09-10 | 2022-09-10 |
| Receiver | Gauss Instruments | TDEMI 30M | ARN | 2021-04-06 | 2022-04-06 |

MEASUREMENT UNCERTAINTY

| Description | | | |
|--------------|--|--------|---------|
| Expanded k=2 | | 3.2 dB | -3.2 dB |

CONFIGURATIONS INVESTIGATED

PCTE0003-10

MODES INVESTIGATED

Continuous Tx - Bluetooth, Mid ch = 2441 MHz, DH5

POWERLINE CONDUCTED EMISSIONS



| | | | |
|-------------------|--------------------------------------|-----------------------|-------------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 |
| Serial Number: | FCC 1 | Date: | 2022-03-04 |
| Customer: | PCTEST Engineering Laboratory, LLC | Temperature: | 20.4°C |
| Attendees: | None | Relative Humidity: | 41.7% |
| Customer Project: | None | Bar. Pressure (PMSL): | 1020 mb |
| Tested By: | Jeff Alcocke | Job Site: | EV07 |
| Power: | 110VAC/60Hz | Configuration: | PCTE0003-10 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2022 | ANSI C63.10:2013 |

TEST PARAMETERS

| | | | | | |
|--------|----|-------|---------|-----------------------------|---|
| Run #: | 23 | Line: | Neutral | Add. Ext. Attenuation (dB): | 0 |
|--------|----|-------|---------|-----------------------------|---|

COMMENTS



None

EUT OPERATING MODES

Continuous Tx - Bluetooth, Mid ch = 2441 MHz, DH5

DEVIATIONS FROM TEST STANDARD

None

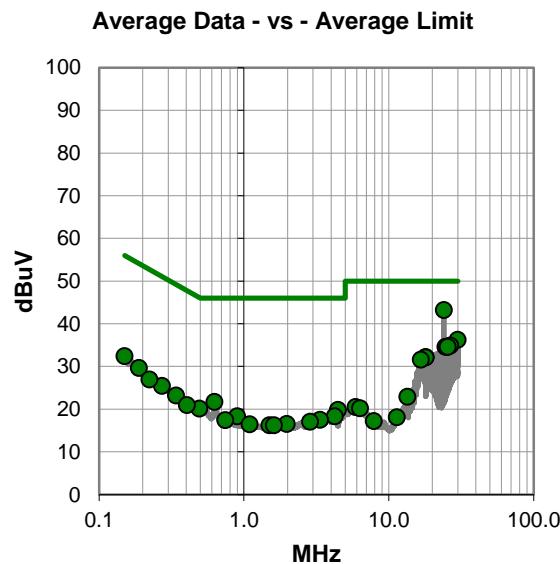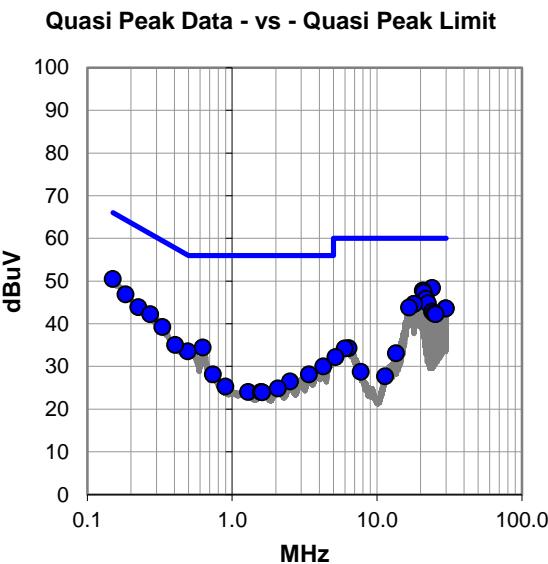

POWERLINE CONDUCTED EMISSIONS



RESULTS - Run #23

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 24.000 | 27.5 | 20.9 | 48.4 | 60.0 | -11.6 |
| 20.725 | 27.0 | 20.8 | 47.8 | 60.0 | -12.2 |
| 21.072 | 26.5 | 20.8 | 47.3 | 60.0 | -12.7 |
| 21.763 | 25.0 | 20.8 | 45.8 | 60.0 | -14.2 |
| 22.454 | 24.0 | 20.8 | 44.8 | 60.0 | -15.2 |
| 17.978 | 24.0 | 20.6 | 44.6 | 60.0 | -15.4 |
| 18.054 | 24.0 | 20.6 | 44.6 | 60.0 | -15.4 |
| 0.150 | 30.4 | 20.1 | 50.5 | 66.0 | -15.5 |
| 16.632 | 23.2 | 20.6 | 43.8 | 60.0 | -16.2 |
| 29.839 | 22.5 | 21.1 | 43.6 | 60.0 | -16.4 |
| 29.954 | 22.5 | 21.1 | 43.6 | 60.0 | -16.4 |
| 24.067 | 21.9 | 20.9 | 42.8 | 60.0 | -17.2 |
| 0.184 | 26.9 | 20.0 | 46.9 | 64.3 | -17.4 |
| 24.758 | 21.5 | 20.9 | 42.4 | 60.0 | -17.6 |
| 25.449 | 21.3 | 20.9 | 42.2 | 60.0 | -17.8 |
| 0.225 | 23.9 | 20.0 | 43.9 | 62.6 | -18.7 |
| 0.272 | 22.3 | 19.9 | 42.2 | 61.1 | -18.9 |
| 0.330 | 19.4 | 19.8 | 39.2 | 59.5 | -20.3 |
| 0.626 | 14.6 | 19.8 | 34.4 | 56.0 | -21.6 |
| 0.493 | 13.7 | 19.8 | 33.5 | 56.1 | -22.6 |
| 0.405 | 15.2 | 19.8 | 35.0 | 57.8 | -22.8 |
| 6.387 | 14.1 | 20.2 | 34.3 | 60.0 | -25.7 |
| 6.005 | 14.0 | 20.2 | 34.2 | 60.0 | -25.8 |
| 4.267 | 10.0 | 20.0 | 30.0 | 56.0 | -26.0 |
| 13.542 | 12.7 | 20.4 | 33.1 | 60.0 | -26.9 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 24.000 | 22.3 | 20.9 | 43.2 | 50.0 | -6.8 |
| 29.966 | 15.1 | 21.1 | 36.2 | 50.0 | -13.8 |
| 26.601 | 13.9 | 21.0 | 34.9 | 50.0 | -15.1 |
| 24.632 | 13.7 | 20.9 | 34.6 | 50.0 | -15.4 |
| 25.323 | 13.7 | 20.9 | 34.6 | 50.0 | -15.4 |
| 25.553 | 13.7 | 20.9 | 34.6 | 50.0 | -15.4 |
| 17.981 | 11.6 | 20.6 | 32.2 | 50.0 | -17.8 |
| 18.005 | 11.5 | 20.6 | 32.1 | 50.0 | -17.9 |
| 16.635 | 11.0 | 20.6 | 31.6 | 50.0 | -18.4 |
| 0.150 | 12.3 | 20.1 | 32.4 | 56.0 | -23.6 |
| 0.628 | 1.9 | 19.8 | 21.7 | 46.0 | -24.3 |
| 0.188 | 9.6 | 20.0 | 29.6 | 54.1 | -24.5 |
| 0.272 | 5.5 | 19.9 | 25.4 | 51.1 | -25.7 |
| 0.223 | 6.9 | 20.0 | 26.9 | 52.7 | -25.8 |
| 0.493 | 0.3 | 19.8 | 20.1 | 46.1 | -26.0 |
| 0.339 | 3.4 | 19.8 | 23.2 | 49.2 | -26.0 |
| 4.462 | -0.2 | 20.0 | 19.8 | 46.0 | -26.2 |
| 0.405 | 1.1 | 19.8 | 20.9 | 47.8 | -26.9 |
| 13.492 | 2.5 | 20.4 | 22.9 | 50.0 | -27.1 |
| 0.901 | -1.6 | 19.9 | 18.3 | 46.0 | -27.7 |
| 4.250 | -1.7 | 20.0 | 18.3 | 46.0 | -27.7 |
| 3.363 | -2.5 | 20.0 | 17.5 | 46.0 | -28.5 |
| 0.744 | -2.5 | 19.9 | 17.4 | 46.0 | -28.6 |
| 2.871 | -3.0 | 20.0 | 17.0 | 46.0 | -29.0 |
| 1.973 | -3.5 | 20.0 | 16.5 | 46.0 | -29.5 |

CONCLUSION

Pass

Tested By

POWERLINE CONDUCTED EMISSIONS



| | | | |
|-------------------|--------------------------------------|-----------------------|-------------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 |
| Serial Number: | FCC 1 | Date: | 2022-03-04 |
| Customer: | PCTEST Engineering Laboratory, LLC | Temperature: | 20.4°C |
| Attendees: | None | Relative Humidity: | 41.7% |
| Customer Project: | None | Bar. Pressure (PMSL): | 1020 mb |
| Tested By: | Jeff Alcocke | Job Site: | EV07 |
| Power: | 110VAC/60Hz | Configuration: | PCTE0003-10 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2022 | ANSI C63.10:2013 |

TEST PARAMETERS

| | | | | | |
|--------|----|-------|-----------|-----------------------------|---|
| Run #: | 24 | Line: | High Line | Add. Ext. Attenuation (dB): | 0 |
|--------|----|-------|-----------|-----------------------------|---|

COMMENTS



None

EUT OPERATING MODES

Continuous Tx - Bluetooth, Mid ch = 2441 MHz, DH5

DEVIATIONS FROM TEST STANDARD

None

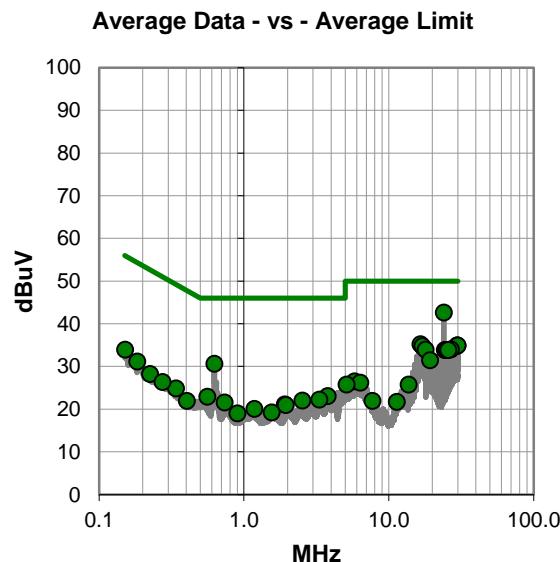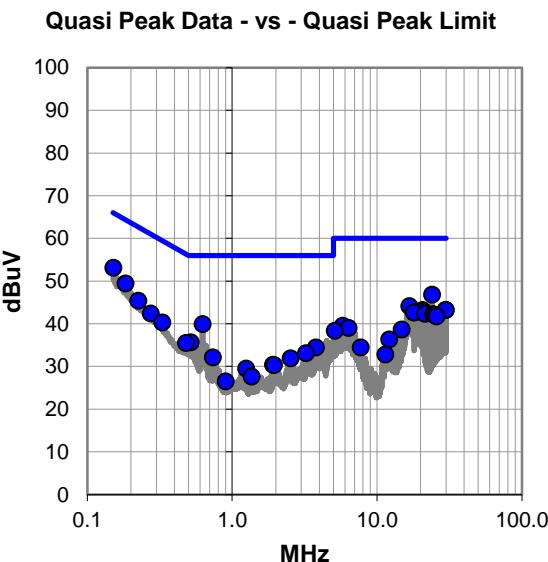

POWERLINE CONDUCTED EMISSIONS



RESULTS - Run #24

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.152 | 33.0 | 20.1 | 53.1 | 65.9 | -12.8 |
| 24.000 | 25.9 | 20.9 | 46.8 | 60.0 | -13.2 |
| 0.184 | 29.4 | 20.0 | 49.4 | 64.3 | -14.9 |
| 16.717 | 23.5 | 20.6 | 44.1 | 60.0 | -15.9 |
| 0.628 | 20.1 | 19.8 | 39.9 | 56.0 | -16.1 |
| 20.622 | 22.4 | 20.8 | 43.2 | 60.0 | -16.8 |
| 29.839 | 22.1 | 21.1 | 43.2 | 60.0 | -16.8 |
| 29.954 | 22.1 | 21.1 | 43.2 | 60.0 | -16.8 |
| 20.725 | 22.2 | 20.8 | 43.0 | 60.0 | -17.0 |
| 19.331 | 22.2 | 20.6 | 42.8 | 60.0 | -17.2 |
| 0.225 | 25.4 | 20.0 | 45.4 | 62.6 | -17.2 |
| 18.003 | 22.0 | 20.6 | 42.6 | 60.0 | -17.4 |
| 21.533 | 21.5 | 20.8 | 42.3 | 60.0 | -17.7 |
| 24.412 | 21.3 | 20.9 | 42.2 | 60.0 | -17.8 |
| 25.103 | 21.1 | 20.9 | 42.0 | 60.0 | -18.0 |
| 25.796 | 20.8 | 20.9 | 41.7 | 60.0 | -18.3 |
| 0.275 | 22.5 | 19.9 | 42.4 | 61.0 | -18.6 |
| 0.330 | 20.5 | 19.8 | 40.3 | 59.5 | -19.2 |
| 0.518 | 15.8 | 19.8 | 35.6 | 56.0 | -20.4 |
| 5.818 | 19.3 | 20.2 | 39.5 | 60.0 | -20.5 |
| 0.481 | 15.7 | 19.8 | 35.5 | 56.3 | -20.8 |
| 6.368 | 18.8 | 20.2 | 39.0 | 60.0 | -21.0 |
| 14.804 | 18.1 | 20.5 | 38.6 | 60.0 | -21.4 |
| 3.791 | 14.4 | 20.0 | 34.4 | 56.0 | -21.6 |
| 5.118 | 18.1 | 20.2 | 38.3 | 60.0 | -21.7 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 24.000 | 21.7 | 20.9 | 42.6 | 50.0 | -7.4 |
| 16.612 | 14.6 | 20.6 | 35.2 | 50.0 | -14.8 |
| 29.735 | 13.8 | 21.1 | 34.9 | 50.0 | -15.1 |
| 29.850 | 13.8 | 21.1 | 34.9 | 50.0 | -15.1 |
| 29.943 | 13.8 | 21.1 | 34.9 | 50.0 | -15.1 |
| 17.083 | 14.1 | 20.6 | 34.7 | 50.0 | -15.3 |
| 0.628 | 10.8 | 19.8 | 30.6 | 46.0 | -15.4 |
| 26.832 | 13.0 | 21.0 | 34.0 | 50.0 | -16.0 |
| 18.003 | 13.3 | 20.6 | 33.9 | 50.0 | -16.1 |
| 24.401 | 12.9 | 20.9 | 33.8 | 50.0 | -16.2 |
| 25.092 | 12.9 | 20.9 | 33.8 | 50.0 | -16.2 |
| 25.207 | 12.9 | 20.9 | 33.8 | 50.0 | -16.2 |
| 25.784 | 12.9 | 20.9 | 33.8 | 50.0 | -16.2 |
| 19.331 | 10.8 | 20.6 | 31.4 | 50.0 | -18.6 |
| 0.152 | 13.8 | 20.1 | 33.9 | 55.9 | -22.0 |
| 3.791 | 3.0 | 20.0 | 23.0 | 46.0 | -23.0 |
| 0.559 | 3.1 | 19.8 | 22.9 | 46.0 | -23.1 |
| 0.184 | 11.1 | 20.0 | 31.1 | 54.3 | -23.2 |
| 5.818 | 6.3 | 20.2 | 26.5 | 50.0 | -23.5 |
| 3.315 | 2.2 | 20.0 | 22.2 | 46.0 | -23.8 |
| 6.368 | 6.0 | 20.2 | 26.2 | 50.0 | -23.8 |
| 2.541 | 2.0 | 20.0 | 22.0 | 46.0 | -24.0 |
| 5.118 | 5.5 | 20.2 | 25.7 | 50.0 | -24.3 |
| 13.719 | 5.3 | 20.4 | 25.7 | 50.0 | -24.3 |
| 0.225 | 8.2 | 20.0 | 28.2 | 52.6 | -24.4 |

CONCLUSION

Pass

Tested By

SPURIOUS RADIATED EMISSIONS



TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies (in no-hop, single channel mode) and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector
PK = Peak Detector
AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10 clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10^{\ast}\log(1/dc)$.

RMS measurements taken for a FHSS radio also may have a duty cycle correction subtracted using the formula $20^{\ast}\log(dc)$, based on the requirements for pulsed operation from ANSI C63.10 section 7.5.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|-----------------|---------------------------|-----|------------|------------|
| Analyzer - Spectrum Analyzer | Agilent | N9010A | AFI | 2020-12-08 | 2021-12-08 |
| Antenna - Biconilog | Teseq | CBL 6141B | AXR | 2020-10-13 | 2022-10-13 |
| Antenna - Double Ridge | EMCO | 3115 | AHC | 2020-07-01 | 2022-07-01 |
| Antenna - Standard Gain | ETS Lindgren | 3160-07 | AHU | NCR | NCR |
| Antenna - Standard Gain | ETS Lindgren | 3160-08 | AHV | NCR | NCR |
| Antenna - Standard Gain | ETS Lindgren | 3160-09 | AIV | NCR | NCR |
| Amplifier - Pre-Amplifier | Miteq | AM-1616-1000 | AOL | 2020-11-17 | 2021-11-17 |
| Amplifier - Pre-Amplifier | Miteq | AMF-3D-00100800-32-13P | PAG | 2020-11-17 | 2021-11-17 |
| Amplifier - Pre-Amplifier | L-3 Narda-MITEQ | AMF-6F-08001200-30-10P | PAO | 2020-11-18 | 2021-11-18 |
| Amplifier - Pre-Amplifier | Miteq | AMF-6F-12001800-30-10P | AVD | 2020-11-18 | 2021-11-18 |
| Amplifier - Pre-Amplifier | Miteq | AMF-6F-18002650-25-10P | AVU | 2021-07-16 | 2022-07-16 |
| Cable | N/A | Bilog Cables | EVA | 2020-11-17 | 2021-11-17 |
| Cable | N/A | Double Ridge Horn Cables | EVB | 2020-11-17 | 2021-11-17 |
| Cable | None | Standard Gain Horns Cable | EVF | 2020-11-18 | 2021-11-18 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | EVY | 2021-07-16 | 2022-07-16 |
| Attenuator | Coaxicom | 3910-20 | AXZ | 2021-02-15 | 2022-02-15 |
| Filter - Low Pass | Micro-Tronics | LPM50004 | LFD | 2021-02-15 | 2022-02-15 |
| Filter - High Pass | Micro-Tronics | HPM50111 | HFO | 2020-11-17 | 2021-11-17 |

SPURIOUS RADIATED EMISSIONS



MEASUREMENT UNCERTAINTY

| Description | | |
|--------------|--------|---------|
| Expanded k=2 | 5.2 dB | -5.2 dB |

FREQUENCY RANGE INVESTIGATED

30 MHz TO 26.5 GHz

POWER INVESTIGATED

5.0 VDC via USB

CONFIGURATIONS INVESTIGATED

PCTE0003-1

MODES INVESTIGATED

Continuous Tx, BT, Low Ch = 2402 MHz, Mid Ch = 2441 MHz, High Ch = 2480 MHz
DH5, 2DH5, 3DH5

SPURIOUS RADIATED EMISSIONS



| | | | |
|-------------------|--------------------------------------|--------------------|------------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 |
| Serial Number: | See Configurations | Date: | 2021-08-24 |
| Customer: | NAL Research Corporation | Temperature: | 21.9°C |
| Attendees: | None | Relative Humidity: | 42.5% |
| Customer Project: | None | Bar. Pressure: | 1018 mb |
| Tested By: | Jeff Alcocke | Job Site: | EV01 |
| Power: | 5.0 VDC via USB | Configuration: | PCTE0003-1 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.247:2021 | ANSI C63.10:2013 |

TEST PARAMETERS

| | | | | | |
|--------|----|--------------------|---|---------------------|-----------|
| Run #: | 15 | Test Distance (m): | 3 | Ant. Height(s) (m): | 1 to 4(m) |
|--------|----|--------------------|---|---------------------|-----------|

COMMENTS


Please reference data comments below for channel, data rate, and EUT orientation.

EUT OPERATING MODES

Continuous Tx, BT, Low Ch = 2402 MHz, Mid Ch = 2441 MHz, High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

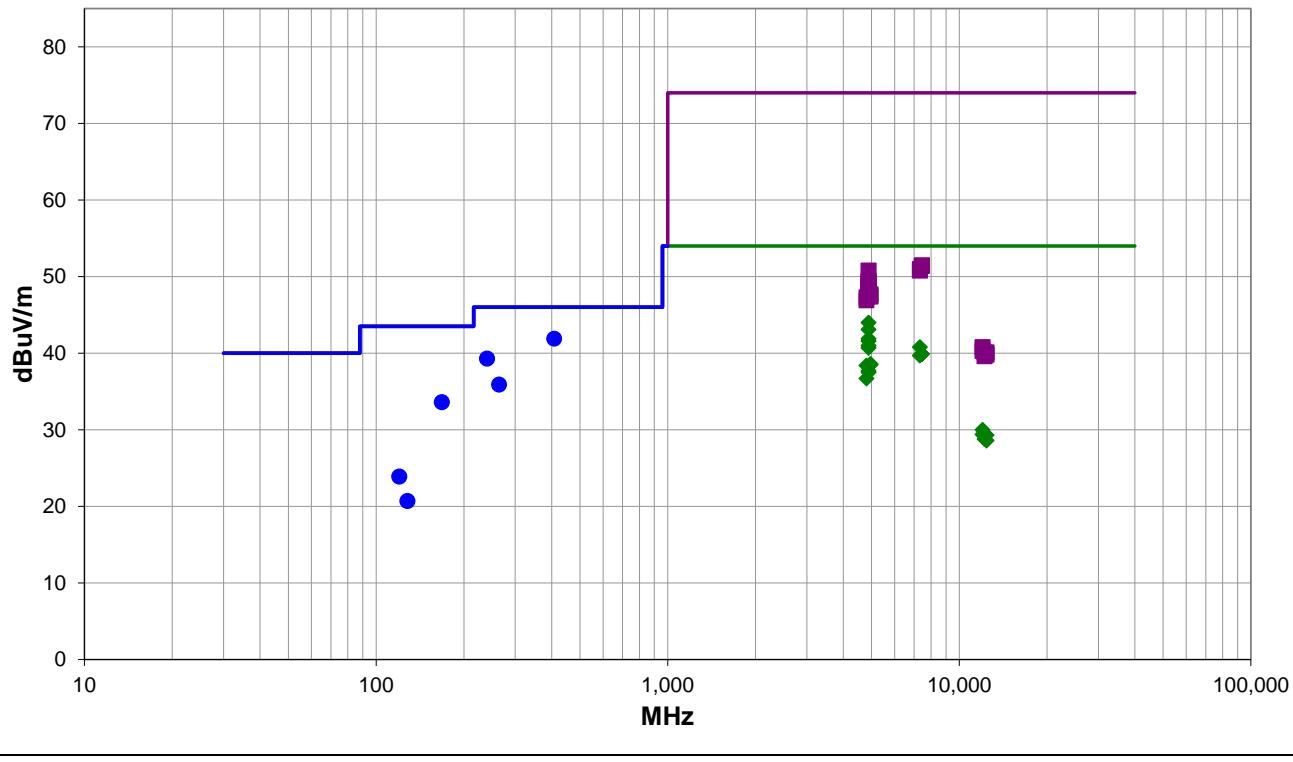

SPURIOUS RADIATED EMISSIONS



RESULTS - Run #15

| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|---------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------|
| 408.010 | 39.4 | 2.5 | 1.0 | 318.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 41.9 | 46.0 | -4.1 | High Ch, DH5, EUT Horz |
| 240.010 | 42.7 | -3.4 | 1.0 | 326.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 39.3 | 46.0 | -6.7 | High Ch, DH5, EUT Horz |
| 168.010 | 38.3 | -4.7 | 2.2 | 324.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 33.6 | 43.5 | -9.9 | High Ch, DH5, EUT Horz |
| 4881.975 | 38.0 | 6.0 | 2.06 | 205.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 44.0 | 54.0 | -10.0 | Mid Ch, DH5, EUT Vert |
| 264.010 | 38.1 | -2.2 | 1.0 | 269.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 35.9 | 46.0 | -10.1 | High Ch, DH5, EUT Horz |
| 4881.975 | 37.1 | 6.0 | 1.61 | 193.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 43.1 | 54.0 | -10.9 | Mid Ch, DH5, EUT Horz |
| 4882.017 | 35.9 | 6.0 | 1.58 | 165.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 41.9 | 54.0 | -12.1 | Mid Ch, DH5, EUT Vert |
| 4881.950 | 35.6 | 6.0 | 1.5 | 210.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 41.6 | 54.0 | -12.4 | Mid Ch, DH5, EUT Horz |
| 4881.992 | 35.0 | 6.0 | 1.11 | 242.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 41.0 | 54.0 | -13.0 | Mid Ch, DH5, EUT on Side |
| 7323.183 | 29.1 | 11.7 | 1.77 | 155.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 40.8 | 54.0 | -13.2 | Mid Ch, DH5, EUT Vert |
| 4882.033 | 34.7 | 6.0 | 1.52 | 183.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 40.7 | 54.0 | -13.3 | Mid Ch, DH5, EUT on Side |
| 7440.308 | 27.7 | 12.2 | 3.31 | 50.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 39.9 | 54.0 | -14.1 | High Ch, DH5, EUT Vert |
| 7439.233 | 27.7 | 12.2 | 1.5 | 265.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 39.9 | 54.0 | -14.1 | High Ch, DH5, EUT Vert |
| 7321.742 | 28.0 | 11.7 | 1.5 | 38.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 39.7 | 54.0 | -14.3 | Mid Ch, DH5, EUT Vert |
| 4959.917 | 32.7 | 5.9 | 1.5 | 22.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 38.6 | 54.0 | -15.4 | High Ch, DH5, EUT Vert |
| 4960.058 | 32.6 | 5.9 | 1.5 | 36.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 38.5 | 54.0 | -15.5 | High Ch, DH5, EUT Vert |
| 4804.017 | 33.3 | 5.1 | 2.05 | 262.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 38.4 | 54.0 | -15.6 | Low Ch, DH5, EUT Vert |
| 4881.883 | 31.7 | 6.0 | 2.24 | 253.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 37.7 | 54.0 | -16.3 | Mid Ch, 3DH5, EUT Vert |
| 4882.042 | 31.5 | 6.0 | 2.24 | 253.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 37.5 | 54.0 | -16.5 | Mid Ch, 3DH5, EUT Vert |
| 4803.992 | 31.6 | 5.1 | 1.09 | 146.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 36.7 | 54.0 | -17.3 | Low Ch, DH5, EUT Vert |
| 120.008 | 28.0 | -4.1 | 1.0 | 38.0 | 3.0 | 0.0 | Vert | QP | 0.0 | 23.9 | 43.5 | -19.6 | High Ch, DH5, EUT Horz |
| 7438.558 | 39.3 | 12.2 | 1.5 | 265.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 51.5 | 74.0 | -22.5 | High Ch, DH5, EUT Vert |
| 7442.183 | 39.2 | 12.2 | 3.31 | 50.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 51.4 | 74.0 | -22.6 | High Ch, DH5, EUT Vert |
| 128.012 | 24.3 | -3.6 | 2.12 | 116.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 20.7 | 43.5 | -22.8 | High Ch, DH5, EUT Horz |
| 7322.592 | 39.3 | 11.7 | 1.5 | 38.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 51.0 | 74.0 | -23.0 | Mid Ch, DH5, EUT Vert |
| 4882.342 | 44.8 | 6.0 | 2.06 | 205.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 50.8 | 74.0 | -23.2 | Mid Ch, DH5, EUT Vert |
| 7323.533 | 39.1 | 11.7 | 1.77 | 155.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 50.8 | 74.0 | -23.2 | Mid Ch, DH5, EUT Vert |
| 12010.490 | 28.9 | 1.1 | 1.09 | 178.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 30.0 | 54.0 | -24.0 | Low Ch, DH5, EUT Vert |
| 4881.700 | 43.4 | 6.0 | 1.61 | 193.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 49.4 | 74.0 | -24.6 | Mid Ch, DH5, EUT Horz |
| 4882.642 | 43.4 | 6.0 | 1.5 | 210.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 49.4 | 74.0 | -24.6 | Mid Ch, DH5, EUT Horz |
| 12009.060 | 28.3 | 1.1 | 1.04 | 181.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.4 | 54.0 | -24.6 | Low Ch, DH5, EUT Vert |
| 12397.980 | 27.8 | 1.5 | 1.0 | 333.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.3 | 54.0 | -24.7 | High Ch, DH5, EUT Vert |
| 12206.030 | 28.3 | 0.9 | 1.0 | 195.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.2 | 54.0 | -24.8 | Mid Ch, DH5, EUT Vert |
| 4881.967 | 43.0 | 6.0 | 1.58 | 165.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 49.0 | 74.0 | -25.0 | Mid Ch, DH5, EUT Vert |
| 4881.267 | 42.9 | 6.0 | 1.11 | 242.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.9 | 74.0 | -25.1 | Mid Ch, DH5, EUT on Side |
| 12204.720 | 27.9 | 0.9 | 1.03 | 54.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 28.8 | 54.0 | -25.2 | Mid Ch, DH5, EUT Vert |
| 4882.167 | 42.8 | 6.0 | 1.52 | 183.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 48.8 | 74.0 | -25.2 | Mid Ch, DH5, EUT on Side |
| 12398.730 | 27.1 | 1.5 | 2.43 | 60.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 28.6 | 54.0 | -25.4 | High Ch, DH5, EUT Vert |
| 4882.200 | 42.1 | 6.0 | 2.24 | 253.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.1 | 74.0 | -25.9 | Mid Ch, 3DH5, EUT Vert |
| 4960.075 | 41.8 | 5.9 | 1.5 | 22.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 47.7 | 74.0 | -26.3 | High Ch, DH5, EUT Vert |
| 4881.925 | 41.6 | 6.0 | 2.24 | 253.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 47.6 | 74.0 | -26.4 | Mid Ch, 2DH5, EUT Vert |

SPURIOUS RADIATED EMISSIONS

| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|---------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|------------------------|
| 4960.483 | 41.5 | 5.9 | 1.5 | 36.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 47.4 | 74.0 | -26.6 | High Ch, DH5, EUT Vert |
| 4804.783 | 42.1 | 5.2 | 2.05 | 262.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 47.3 | 74.0 | -26.7 | Low Ch, DH5, EUT Vert |
| 4802.075 | 41.8 | 5.1 | 1.09 | 146.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 46.9 | 74.0 | -27.1 | Low Ch, DH5, EUT Vert |
| 12009.960 | 39.7 | 1.1 | 1.09 | 178.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.8 | 74.0 | -33.2 | Low Ch. DH5, EUT Vert |
| 12011.250 | 39.2 | 1.1 | 1.04 | 181.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 40.3 | 74.0 | -33.7 | Low Ch. DH5, EUT Vert |
| 12207.080 | 39.2 | 0.9 | 1.0 | 195.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.1 | 74.0 | -33.9 | Mid Ch, DH5, EUT Vert |
| 12398.990 | 38.6 | 1.5 | 1.0 | 333.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 40.1 | 74.0 | -33.9 | High Ch, DH5, EUT Vert |
| 12398.480 | 38.3 | 1.5 | 2.43 | 60.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 39.8 | 74.0 | -34.2 | High Ch, DH5, EUT Vert |
| 12205.420 | 38.7 | 0.9 | 1.03 | 54.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 39.6 | 74.0 | -34.4 | Mid Ch, DH5, EUT Vert |

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS



| | | | |
|-------------------|--------------------------------------|--------------------|------------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 |
| Serial Number: | See Configurations | Date: | 2021-08-24 |
| Customer: | NAL Research Corporation | Temperature: | 22.6°C |
| Attendees: | None | Relative Humidity: | 42.8% |
| Customer Project: | None | Bar. Pressure: | 1017 mb |
| Tested By: | Jeff Alcocke | Job Site: | EV01 |
| Power: | 5.0 VDC via USB | Configuration: | PCTE0003-1 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.247:2021 | ANSI C63.10:2013 |

TEST PARAMETERS

| | | | | | |
|--------|----|--------------------|---|---------------------|-----------|
| Run #: | 21 | Test Distance (m): | 3 | Ant. Height(s) (m): | 1 to 4(m) |
|--------|----|--------------------|---|---------------------|-----------|

COMMENTS


Please reference data comments below for channel, data rate, and EUT orientation.

EUT OPERATING MODES

Continuous Tx, BT, Low Ch = 2402 MHz, Mid Ch = 2441 MHz, High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

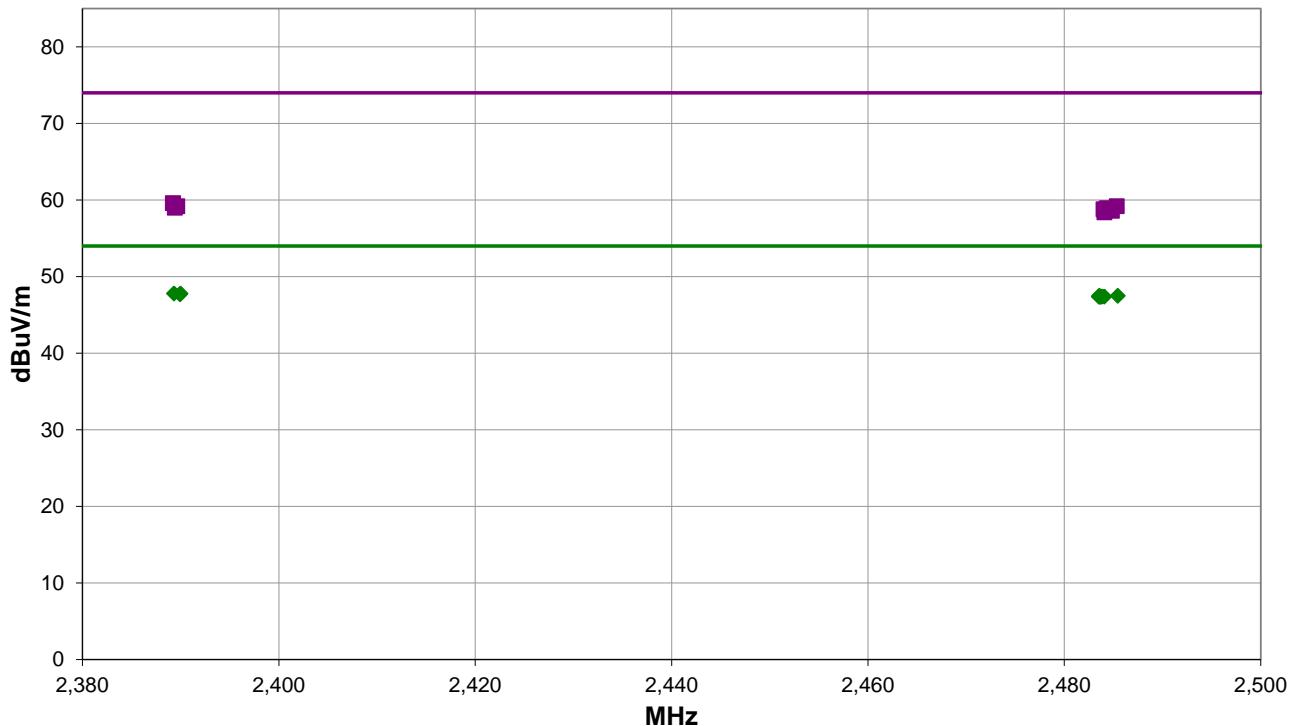

Run #: 21

PK AV QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #21

| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|---------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|---------------------------|
| 2389.313 | 31.3 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.8 | 54.0 | -6.2 | Low Ch, DH5, EUT Horz |
| 2389.977 | 31.3 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.8 | 54.0 | -6.2 | Low Ch, 2DH5, EUT Horz |
| 2389.930 | 31.2 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.7 | 54.0 | -6.3 | Low Ch, 3DH5, EUT Horz |
| 2485.440 | 31.0 | -3.5 | 1.5 | 357.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 47.5 | 54.0 | -6.5 | High Ch, DH5, EUT Vert |
| 2483.567 | 31.1 | -3.6 | 1.5 | 48.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 47.5 | 54.0 | -6.5 | High Ch, DH5, EUT Horz |
| 2483.703 | 31.0 | -3.6 | 1.5 | 173.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, DH5, EUT Vert |
| 2483.510 | 31.0 | -3.6 | 1.5 | 38.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, DH5, EUT on Side |
| 2483.643 | 31.0 | -3.6 | 1.5 | 152.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, DH5, EUT on Side |
| 2483.573 | 31.0 | -3.6 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, DH5, EUT Horz |
| 2483.827 | 31.0 | -3.6 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, 2DH5, EUT Horz |
| 2484.073 | 31.0 | -3.6 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 47.4 | 54.0 | -6.6 | High Ch, 3DH5, EUT Horz |
| 2389.217 | 43.1 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 59.6 | 74.0 | -14.4 | Low Ch, DH5, EUT Horz |
| 2485.343 | 42.7 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 59.2 | 74.0 | -14.8 | High Ch, 3DH5, EUT Horz |
| 2389.647 | 42.7 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 59.2 | 74.0 | -14.8 | Low Ch, 3DH5, EUT Horz |
| 2389.403 | 42.5 | -3.5 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 59.0 | 74.0 | -15.0 | Low Ch, 2DH5, EUT Horz |
| 2484.307 | 42.5 | -3.6 | 1.5 | 357.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.9 | 74.0 | -15.1 | High Ch, DH5, EUT Vert |
| 2484.433 | 42.5 | -3.6 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.9 | 74.0 | -15.1 | High Ch, 2DH5, EUT Horz |
| 2484.370 | 42.4 | -3.6 | 1.5 | 38.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.8 | 74.0 | -15.2 | High Ch, DH5, EUT on Side |
| 2484.313 | 42.4 | -3.6 | 1.5 | 48.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.8 | 74.0 | -15.2 | High Ch, DH5, EUT Horz |
| 2484.000 | 42.4 | -3.6 | 1.5 | 15.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.8 | 74.0 | -15.2 | High Ch, DH5, EUT Horz |
| 2484.843 | 42.2 | -3.6 | 1.5 | 152.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.6 | 74.0 | -15.4 | High Ch, DH5, EUT on Side |
| 2484.083 | 42.0 | -3.6 | 1.5 | 173.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.4 | 74.0 | -15.6 | High Ch, DH5, EUT Vert |

CONCLUSION

Pass



Tested By

DUTY CYCLE



TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

CARRIER FREQUENCY SEPARATION



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The channel carrier frequencies in the 2400-2483.5MHz band must be separated by 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Or, if the output power is less than 125 mW, the channel separation can be 25 kHz or 2/3 of the 20dB bandwidth. The EUT was operated in pseudorandom hopping mode. The spectrum was scanned across two adjacent peaks. The separation between the peaks of these channels was measured.

CARRIER FREQUENCY SEPARATION



TbTx 2021.03.19.1 XMII 2020.12.30.0


| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 |
|-------------------------------|--|-------------------|-----------|
| Serial Number: | FCC 1 | Date: | 24-May-21 |
| Customer: | NAL Research Corporation | Temperature: | 22.6 °C |
| Attendees: | None | Humidity: | 43.6% RH |
| Project: | None | Barometric Pres.: | 1021 mbar |
| Tested by: | Jeff Alcock | Job Site: | EV06 |
| TEST SPECIFICATIONS | Power: 5.0 VDC via USB | Test Method | |
| FCC 15.247:2021 | | ANSI C63.10:2013 | |
| COMMENTS | From this report the 20dB occupied bandwidth is 0.8864 MHz. The carrier frequency separation shall be 2/3 * the 20 dB occupied bandwidth = 2/3 * 0.8864 MHz = 0.591 MHz. | | |
| DEVIATIONS FROM TEST STANDARD | None | | |
| Configuration # | 3 | Signature | |
| | | Value | Limit (±) |
| Hopping Mode (All Channels) | Mid Channel, 2441 MHz | 1.0 MHz | .591 MHz |
| | | | Pass |

CARRIER FREQUENCY SEPARATION



TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | Limit |
|---|----------|---------|-------|
| Value | (≥) | Results | |
| 1.0 MHz | .591 MHz | Pass | |

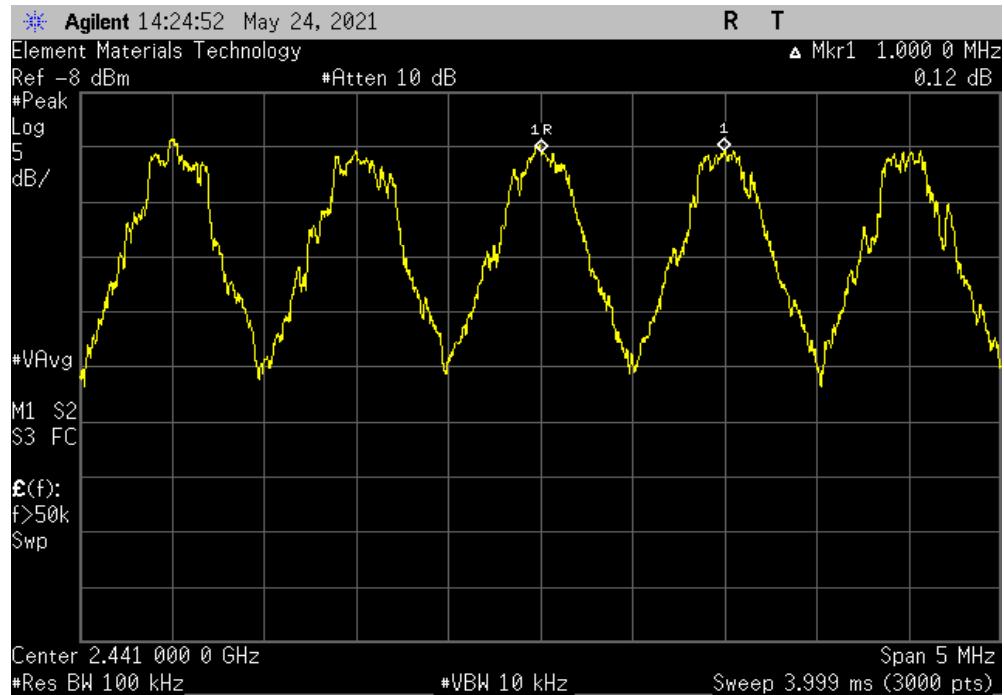

NUMBER OF HOPPING FREQUENCIES



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The number of hopping frequencies was measured across the authorized band. The hopping function of the EUT was enabled.

NUMBER OF HOPPING FREQUENCIES



TbTx 2021.03.19.1 XMII 2020.12.30.0


| | | | | | |
|-------------------------------|--------------------------------------|-----------|-------------------|--------------------|-----------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | | Work Order: | PCTE0003 | |
| Serial Number: | FCC 1 | | Date: | 24-May-21 | |
| Customer: | NAL Research Corporation | | Temperature: | 22.6 °C | |
| Attendees: | None | | Humidity: | 43.6% RH | |
| Project: | None | | Barometric Pres.: | 1021 mbar | |
| Tested by: | Jeff Alcocke | Power: | 5.0 VDC via USB | Job Site: | EV06 |
| TEST SPECIFICATIONS | | | Test Method | | |
| FCC 15.247:2021 | | | ANSI C63.10:2013 | | |
| COMMENTS | | | | | |
| None | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | |
| None | | | | | |
| Configuration # | 3 | Signature | | Number of Channels | Limit (2) |
| | | | | 79 | 15 |
| | | | | Pass | |
| Hopping Mode (All Channels) | | | | | |
| DH5, GFSK | | | | | |
| Mid Channel, 2441 MHz | | | | | |

NUMBER OF HOPPING FREQUENCIES



TbtTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | |
|---|-----------|---------|
| Number of Channels | Limit (≥) | Results |
| 79 | 15 | Pass |

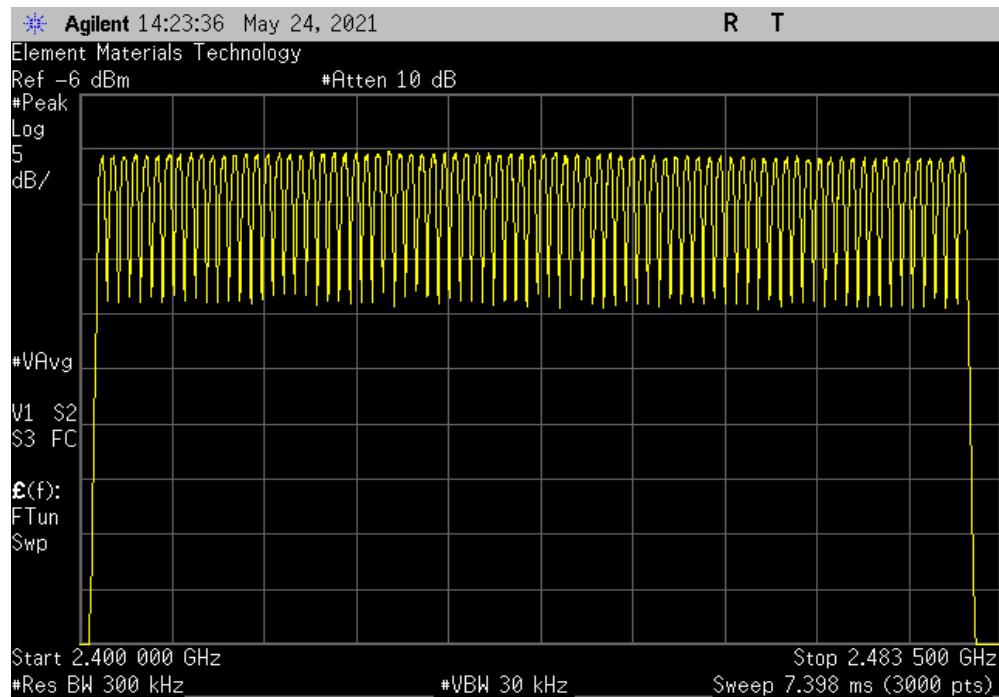

DWELL TIME



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The average dwell time per hopping channel was measured at one hopping channel in the middle of the authorized band. The hopping function of the EUT was enabled.

The dwell time limit is based on the Number of Hopping Channels * 400 mS. For Bluetooth this would be 79 Channels * 400mS = 31.6 Sec.

On Time During 31.6 Sec = Pulse Width * Average Number of Pulses * Scale Factor

- Average Number of Pulses is based on 4 samples.
- Scale Factor = 31.6 Sec / Screen Capture Sweep Time = 31.6 Sec / 6.32 Sec = 5

DWELL TIME



TbTx 2021.03.19.1 XMII 2020.12.30.0


| | | | | | | | | | | | | | | | | |
|-------------------------------|--------------------------------------|------------------|-------------------|------------------|------------------|-----------------------|--------------|----------------------------|------------|---------|--|--|--|--|--|--|
| EUT: | SHOUT sp Handheld Iridium Smartphone | | Work Order: | PCTE0003 | | | | | | | | | | | | |
| Serial Number: | FCC 1 | | Date: | 24-May-21 | | | | | | | | | | | | |
| Customer: | NAL Research Corporation | | Temperature: | 22.6 °C | | | | | | | | | | | | |
| Attendees: | None | | Humidity: | 43.6% RH | | | | | | | | | | | | |
| Project: | None | | Barometric Pres.: | 1021 mbar | | | | | | | | | | | | |
| Tested by: | Jeff Alcock | Power: | 5.0 VDC via USB | Test Method: | Job Site: EV06 | | | | | | | | | | | |
| TEST SPECIFICATIONS | | ANSI C63.10:2013 | | | | | | | | | | | | | | |
| FCC 15.247:2021 | | | | | | | | | | | | | | | | |
| COMMENTS | | | | | | | | | | | | | | | | |
| None | | | | | | | | | | | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | | | | | | | | | | | |
| None | | | | | | | | | | | | | | | | |
| Configuration # | 3 | Signature | | Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results | | | | | | |
| Hopping Mode (All Channels) | | | | | | | | | | | | | | | | |
| DH5, GFSK | | | | | | | | | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| 2DH5, pi/4-DQPSK | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| 3DH5, 8-DPSK | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | N/A | | | | | | | | |
| Mid Channel, 2441 MHz | | | | | | | | | | | | | | | | |

DWELL TIME




TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.913 | N/A | N/A | N/A | N/A | N/A | N/A |

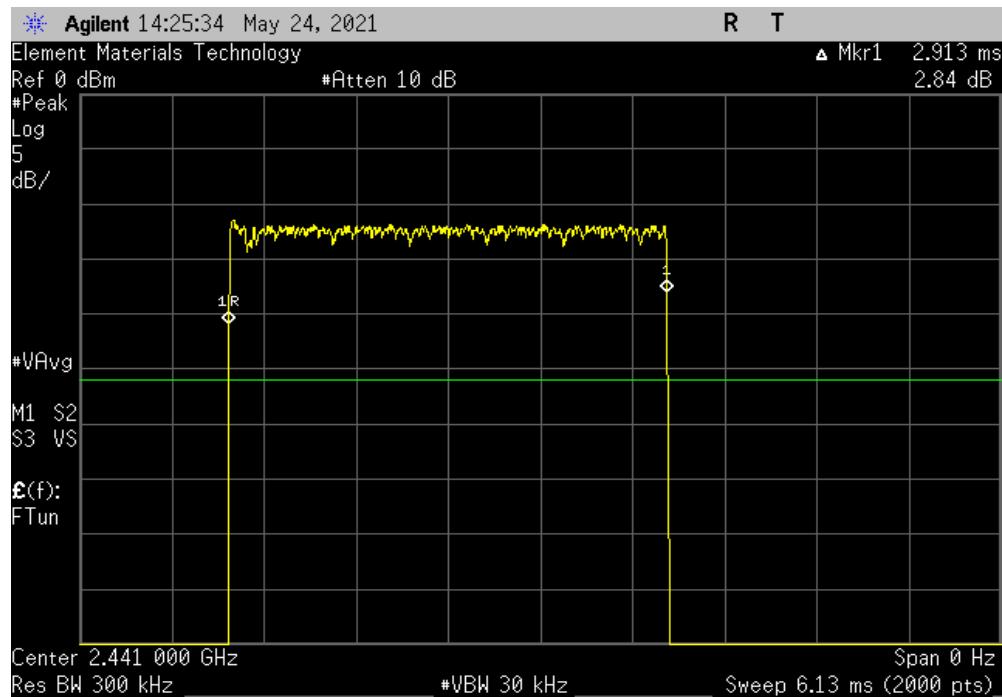

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 23 | N/A | N/A | N/A | N/A | N/A |

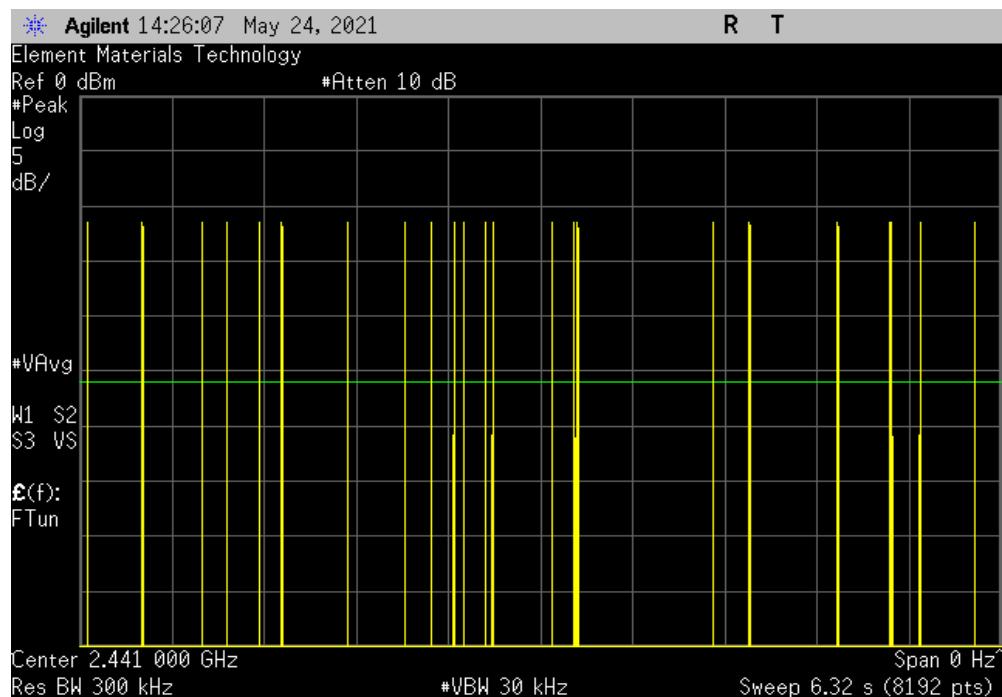


DWELL TIME




TbtTx 2021.03.19.1

XMit 2020.12.30.0

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 24 | N/A | N/A | N/A | N/A | N/A |

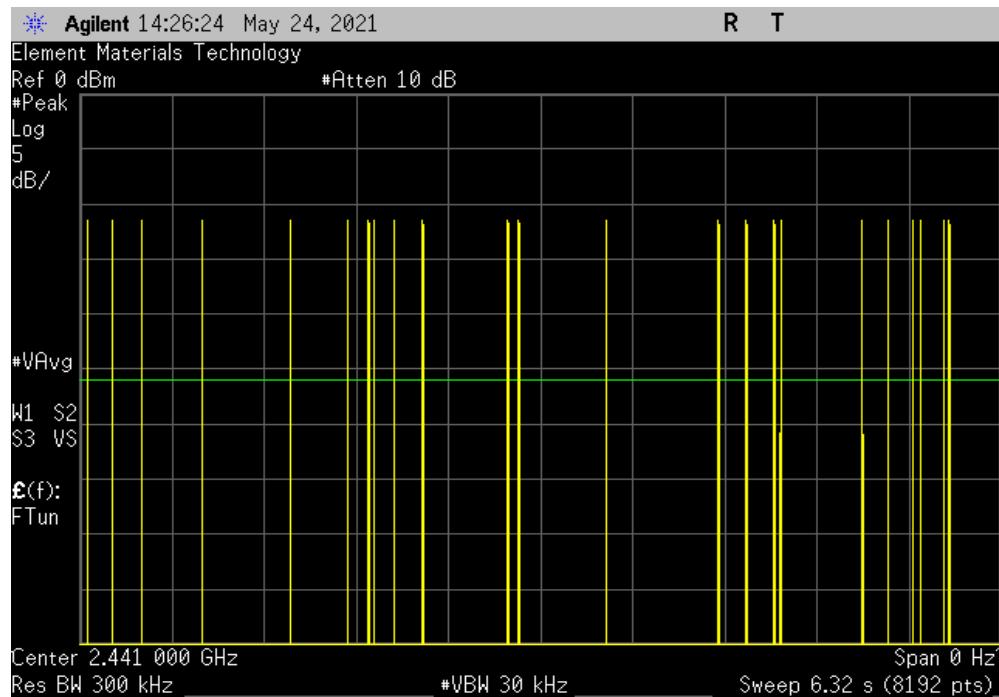

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 19 | N/A | N/A | N/A | N/A | N/A |

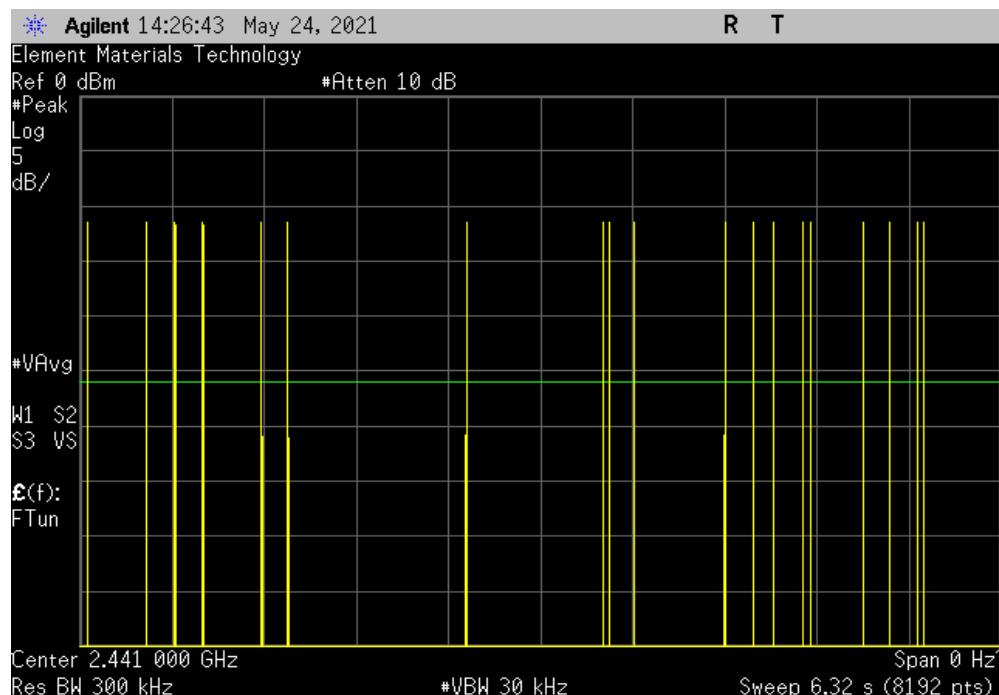


DWELL TIME



TbtTx 2021.03.19.1

XMit 2020.12.30.0

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 14 | N/A | N/A | N/A | N/A | N/A |

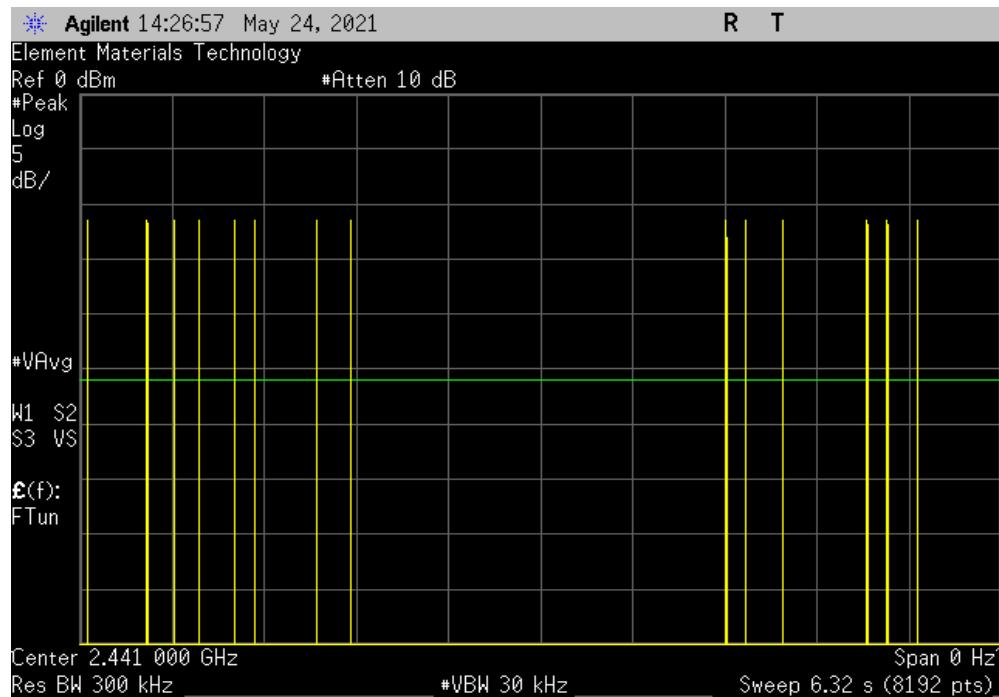

| Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|---|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.913 | N/A | 20 | 5 | 291.3 | ≤ 400 | Pass |

Calculation Only


No Screen Capture Required

DWELL TIME




TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.91 | N/A | N/A | N/A | N/A | N/A | N/A |

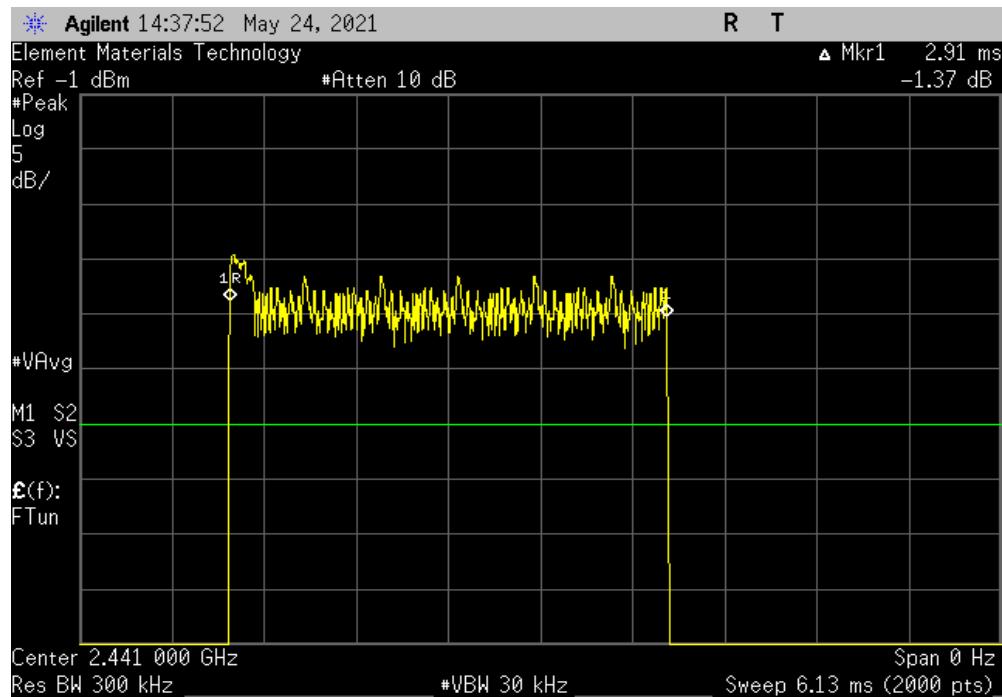

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 30 | N/A | N/A | N/A | N/A | N/A |

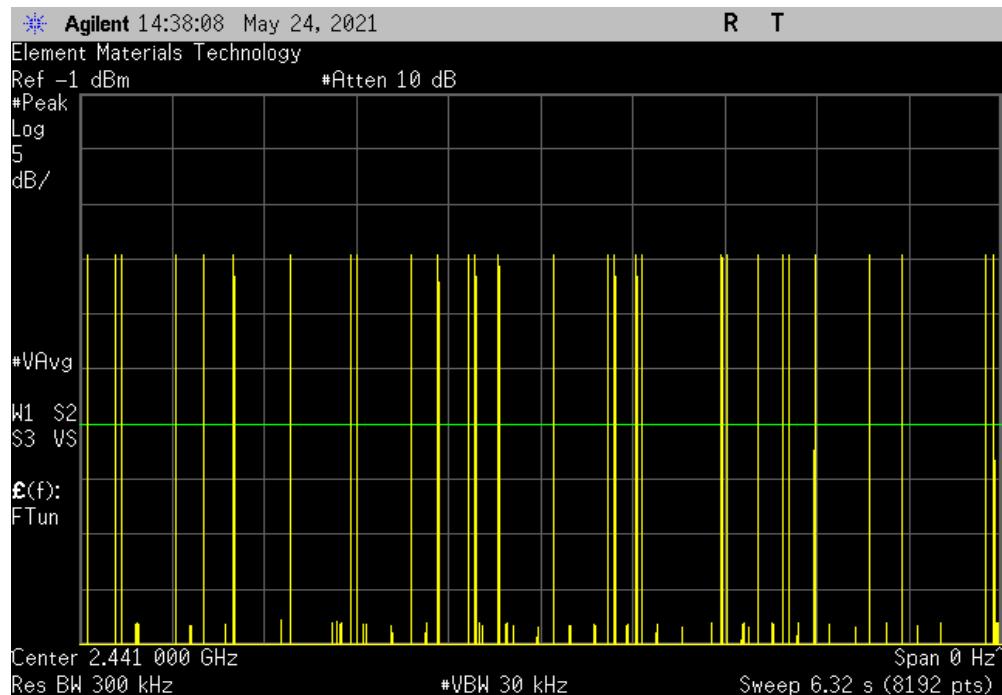


DWELL TIME




TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 19 | N/A | N/A | N/A | N/A | N/A |

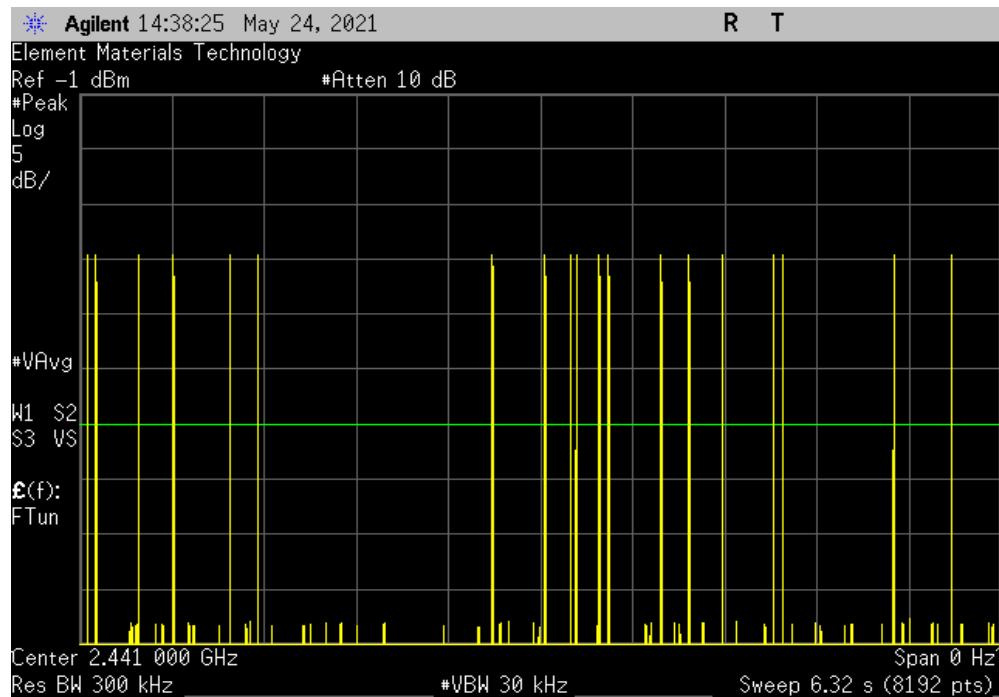

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 24 | N/A | N/A | N/A | N/A | N/A |

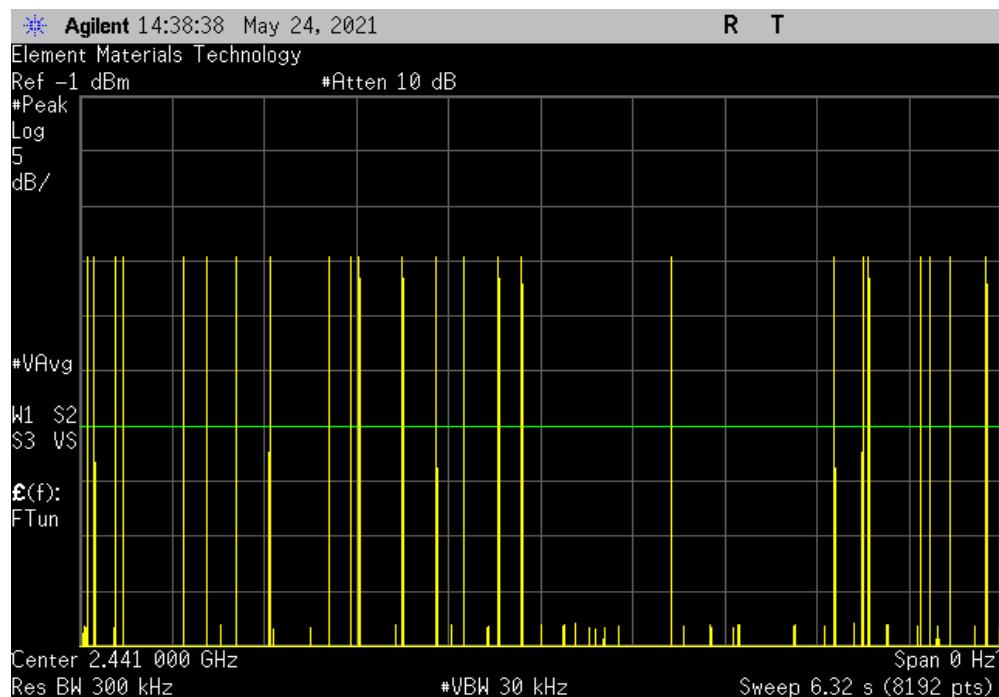


DWELL TIME



TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 20 | N/A | N/A | N/A | N/A | N/A |

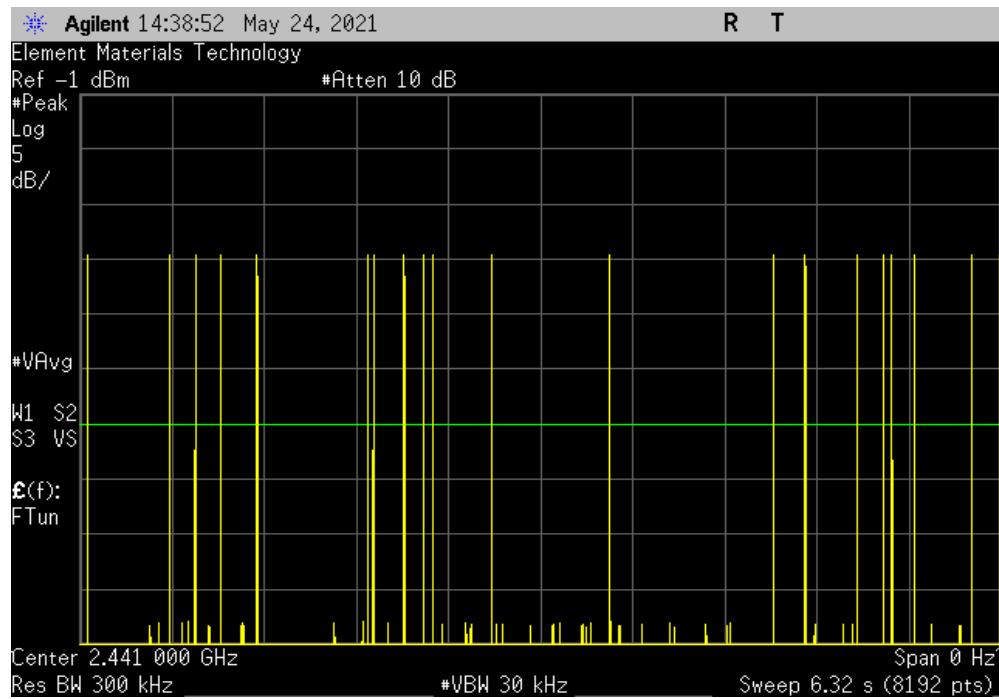

| Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.91 | N/A | 23.25 | 5 | 338.29 | ≤ 400 | Pass |

Calculation Only


No Screen Capture Required

DWELL TIME




TbTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.914 | N/A | N/A | N/A | N/A | N/A | N/A |

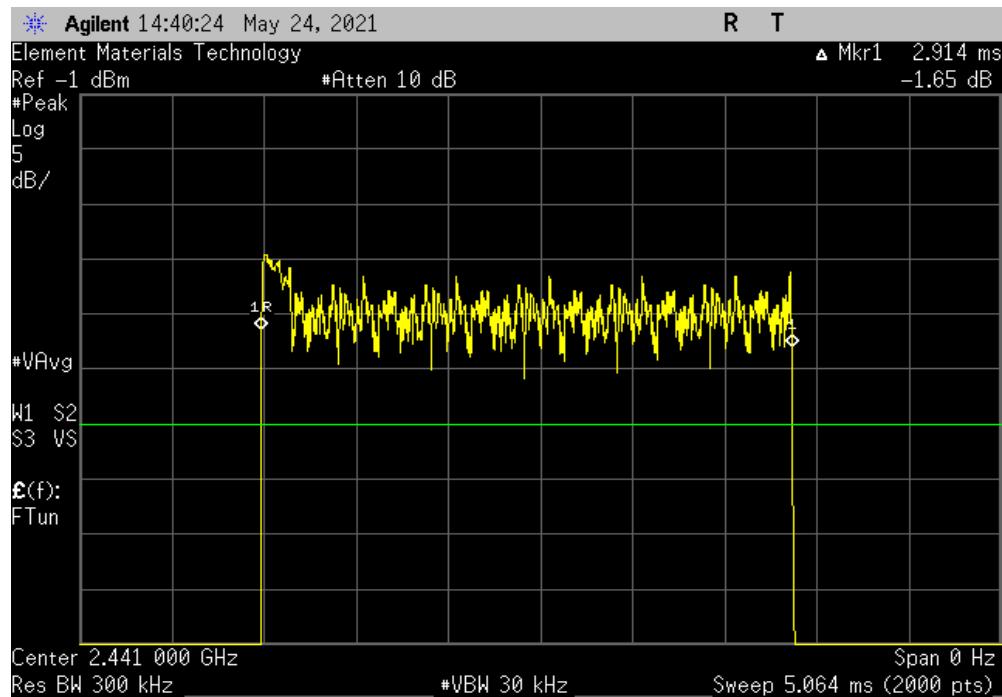

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 22 | N/A | N/A | N/A | N/A | N/A |

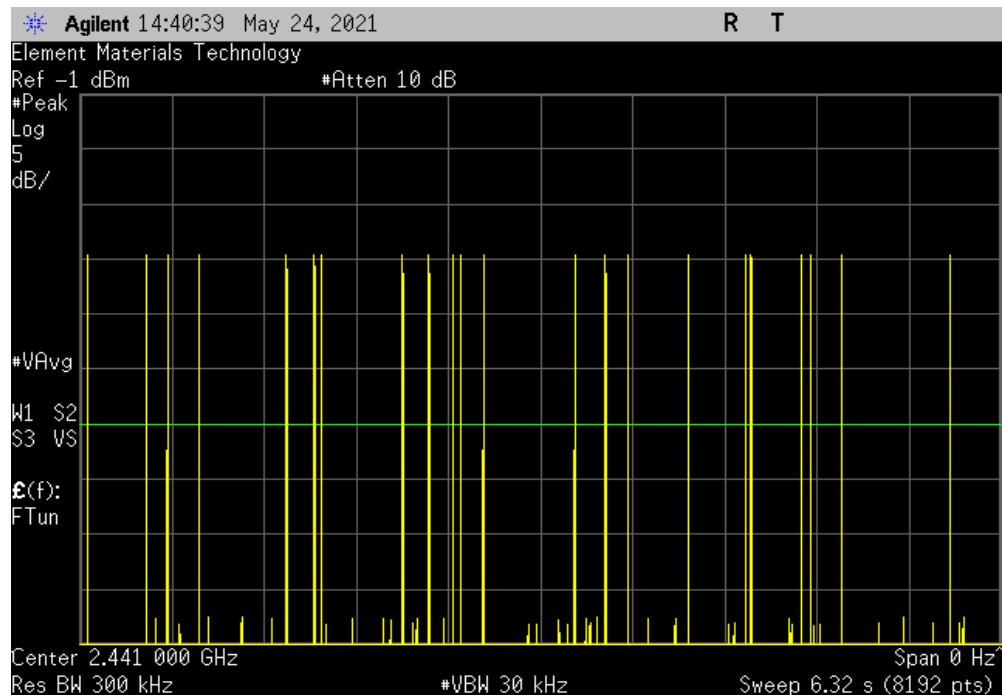


DWELL TIME




TbtTx 2021.03.19.1

XMit 2020.12.30.0

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 23 | N/A | N/A | N/A | N/A | N/A |

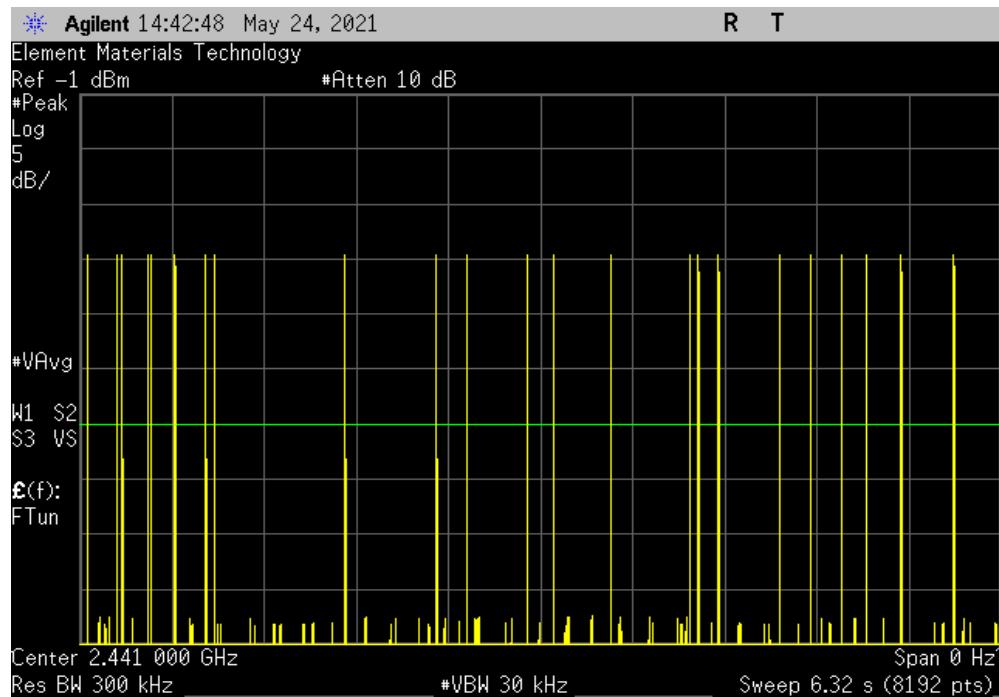

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 21 | N/A | N/A | N/A | N/A | N/A |

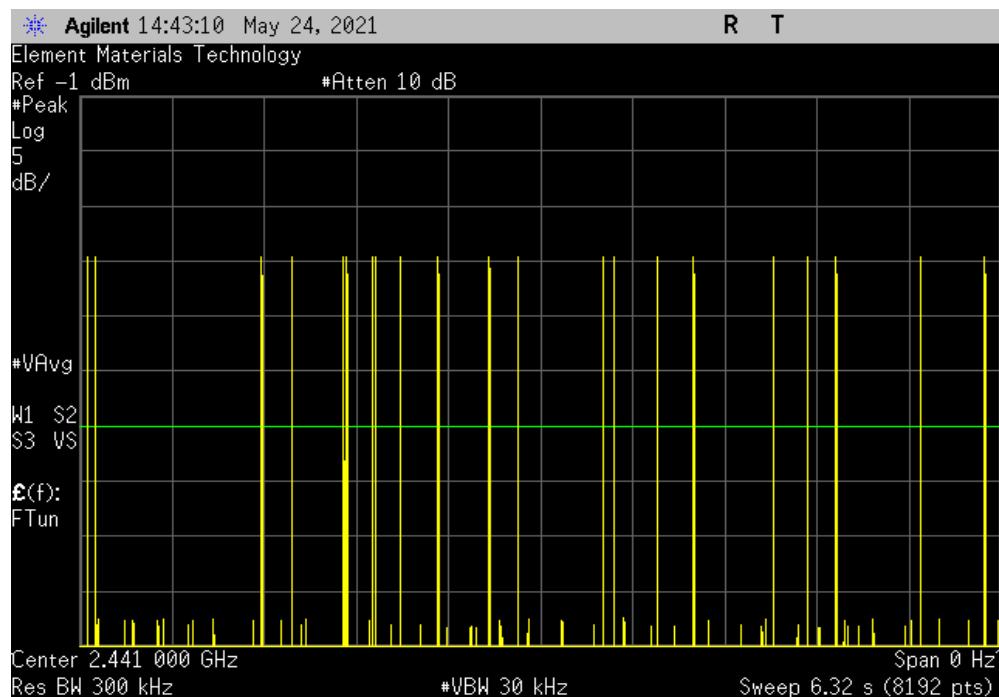


DWELL TIME



TbtTx 2021.03.19.1

XMit 2020.12.30.0

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| N/A | 20 | N/A | N/A | N/A | N/A | N/A |

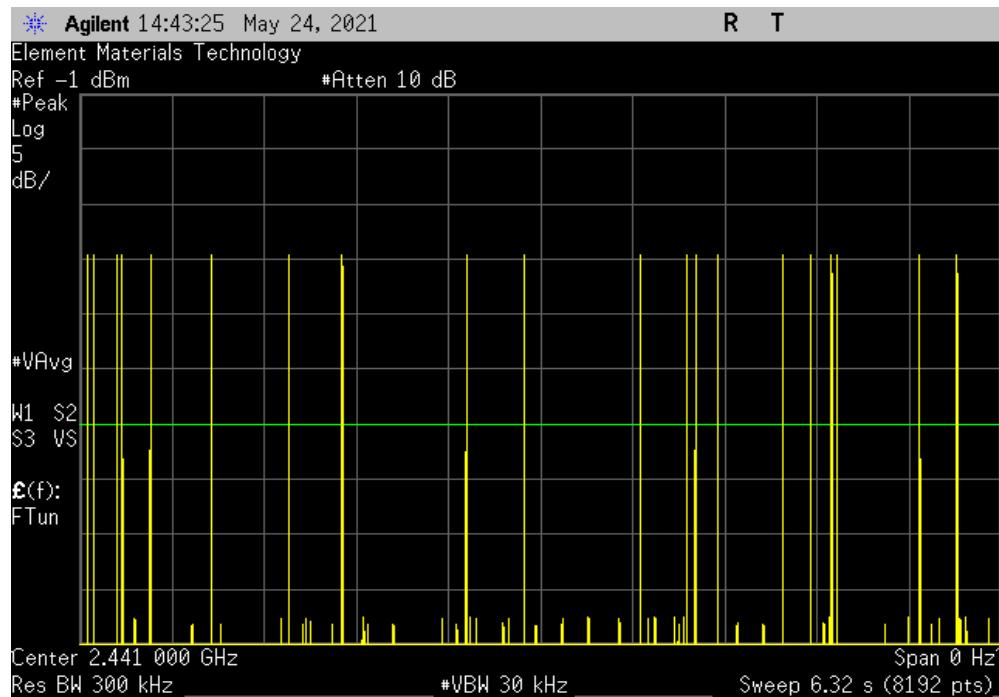

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | | |
|--|------------------|-----------------------|--------------|----------------------------|------------|---------|
| Pulse Width (ms) | Number of Pulses | Average No. of Pulses | Scale Factor | On Time (ms) During 31.6 s | Limit (ms) | Results |
| 2.914 | N/A | 21.5 | 5 | 313.26 | ≤ 400 | Pass |

Calculation Only

No Screen Capture Required

OUTPUT POWER



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

The method found in ANSI C63.10:2013 Section 7.8.5 was used for a FHSS radio.

OUTPUT POWER



TbTx 2021.03.19.1 XMII 2020.12.30.0


| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 | | | |
|-------------------------------|--|-------------------|------------------|--------|--|--|
| Serial Number: | FCC 1 | Date: | 24-May-21 | | | |
| Customer: | NAL Research Corporation | Temperature: | 22.8 °C | | | |
| Attendees: | None | Humidity: | 44.1% RH | | | |
| Project: | None | Barometric Pres.: | 1021 mbar | | | |
| Tested by: | Jeff Alcock | Power: | 5.0 VDC via USB | | | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2013 | | | |
| FCC 15.247:2021 | | | | | | |
| COMMENTS | Reference level offset includes: DC block, 20 dB attenuator, measurement cable, and manufacturers SMA patch cable. | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 3 | Signature | | | | |
| DH5, GFSK | | Out Pwr (dBm) | Limit (dBm) | Result | | |
| Low Channel, 2402 MHz | | 11.665 | 21 | Pass | | |
| Mid Channel, 2441 MHz | | 11.783 | 21 | Pass | | |
| High Channel, 2480 MHz | | 11.47 | 21 | Pass | | |
| 2DH5, pi/4-DQPSK | | Out Pwr (dBm) | Limit (dBm) | Result | | |
| Low Channel, 2402 MHz | | 9.266 | 21 | Pass | | |
| Mid Channel, 2441 MHz | | 9.891 | 21 | Pass | | |
| High Channel, 2480 MHz | | 9.982 | 21 | Pass | | |
| 3DH5, 8-DPSK | | Out Pwr (dBm) | Limit (dBm) | Result | | |
| Low Channel, 2402 MHz | | 9.933 | 21 | Pass | | |
| Mid Channel, 2441 MHz | | 10.442 | 21 | Pass | | |
| High Channel, 2480 MHz | | 10.409 | 21 | Pass | | |

OUTPUT POWER




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|----------------------------------|--|--|--|------------------|----------------|--------|
| | | | | 11.665 | 21 | Pass |

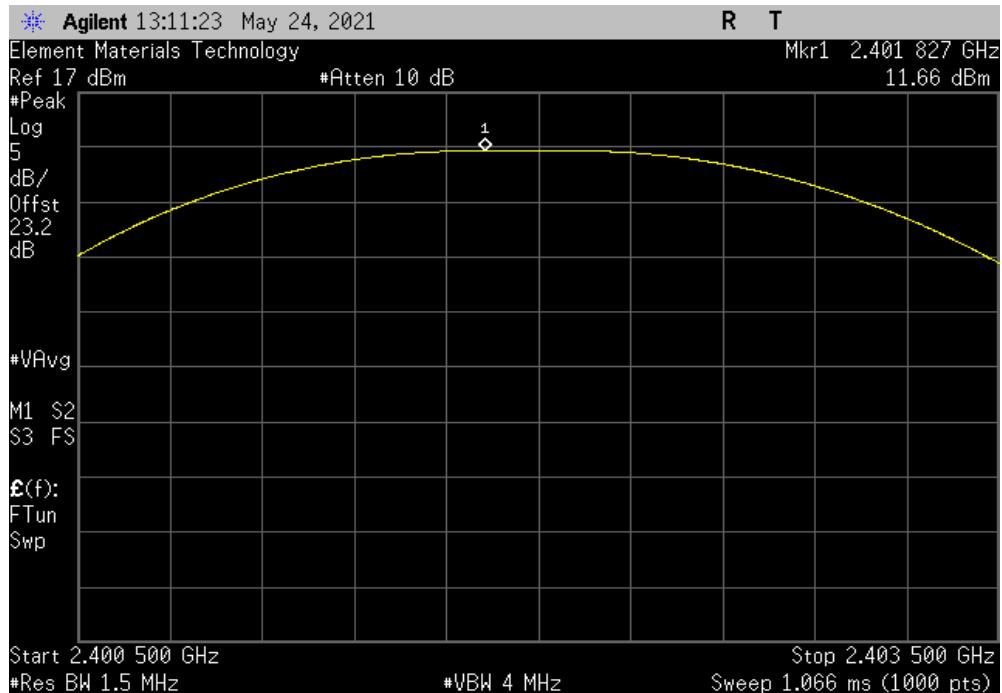

| DH5, GFSK, Mid Channel, 2441 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|----------------------------------|--|--|--|------------------|----------------|--------|
| | | | | 11.783 | 21 | Pass |

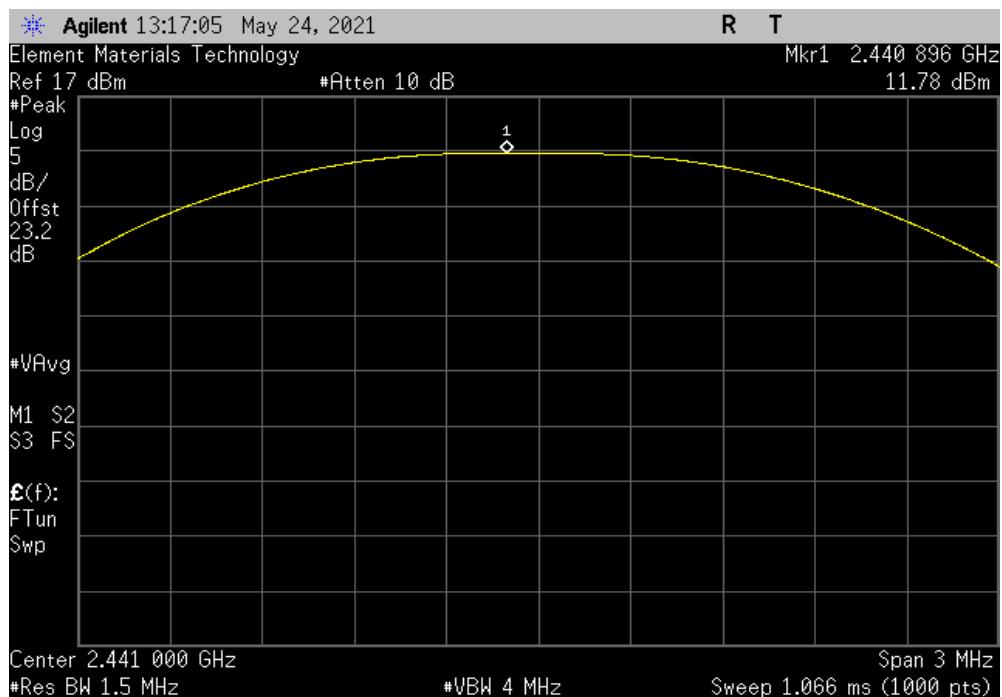


OUTPUT POWER




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, High Channel, 2480 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|-----------------------------------|--|--|--|------------------|----------------|--------|
| | | | | 11.47 | 21 | Pass |

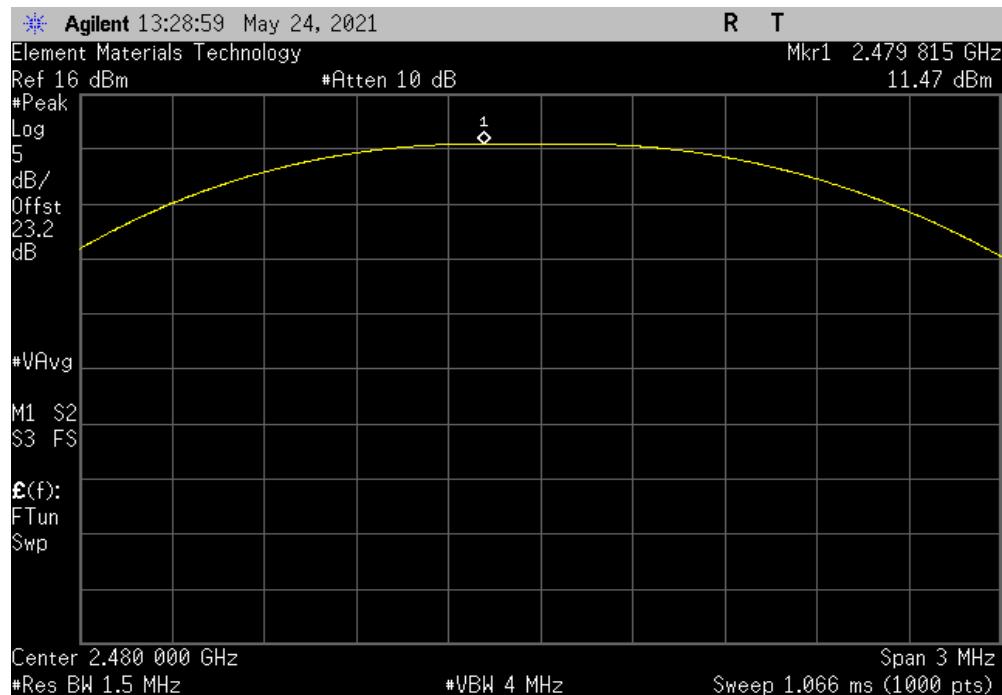

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|---|--|--|--|------------------|----------------|--------|
| | | | | 9.266 | 21 | Pass |

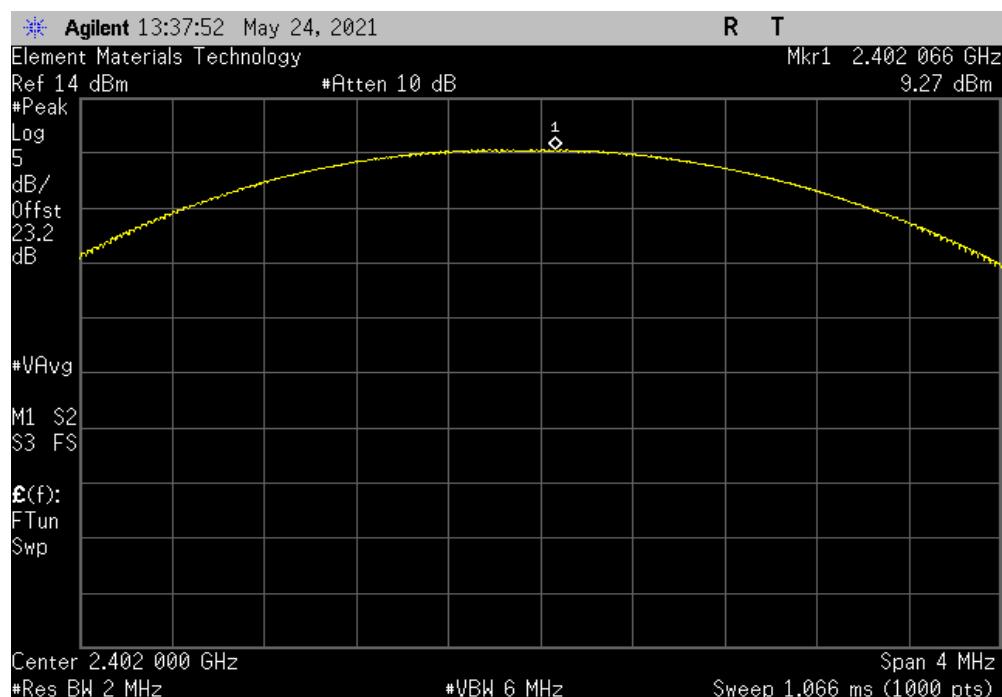


OUTPUT POWER




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|---|--|--|--|---------------|-------------|--------|
| | | | | 9.891 | 21 | Pass |

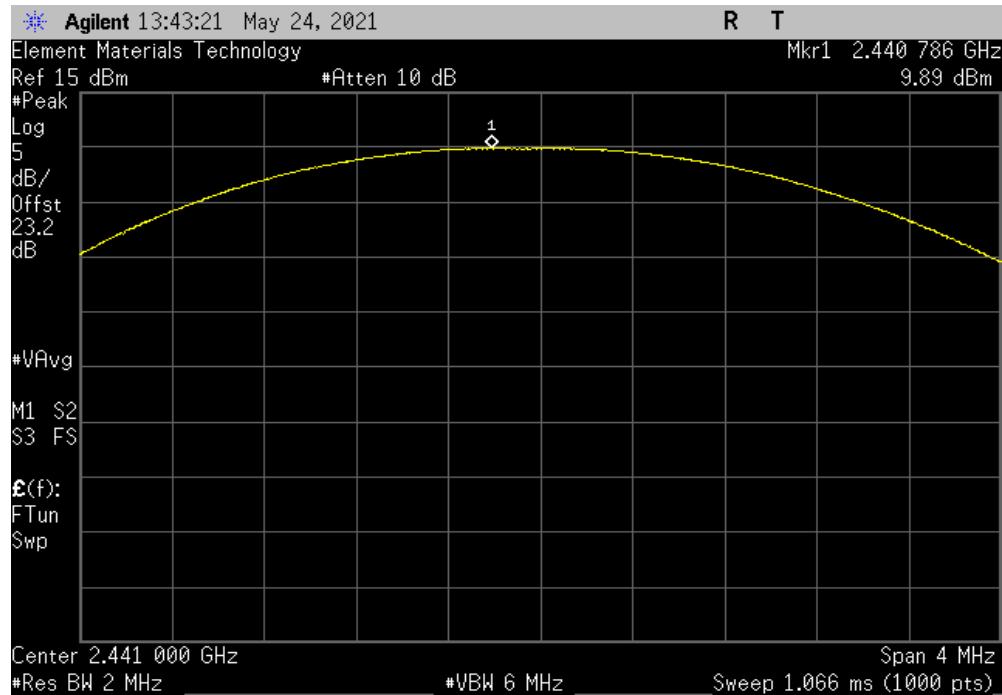

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | | Out Pwr (dBm) | Limit (dBm) | Result |
|--|--|--|--|---------------|-------------|--------|
| | | | | 9.982 | 21 | Pass |

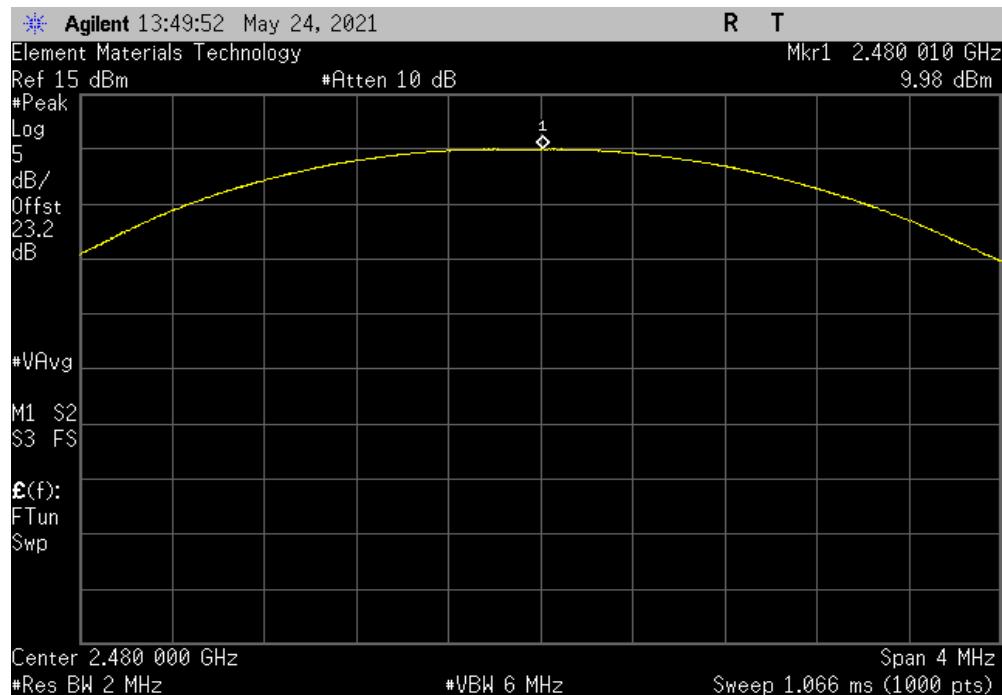


OUTPUT POWER




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | |
|-------------------------------------|-------------|--------|
| Out Pwr (dBm) | Limit (dBm) | Result |
| 9.933 | 21 | Pass |

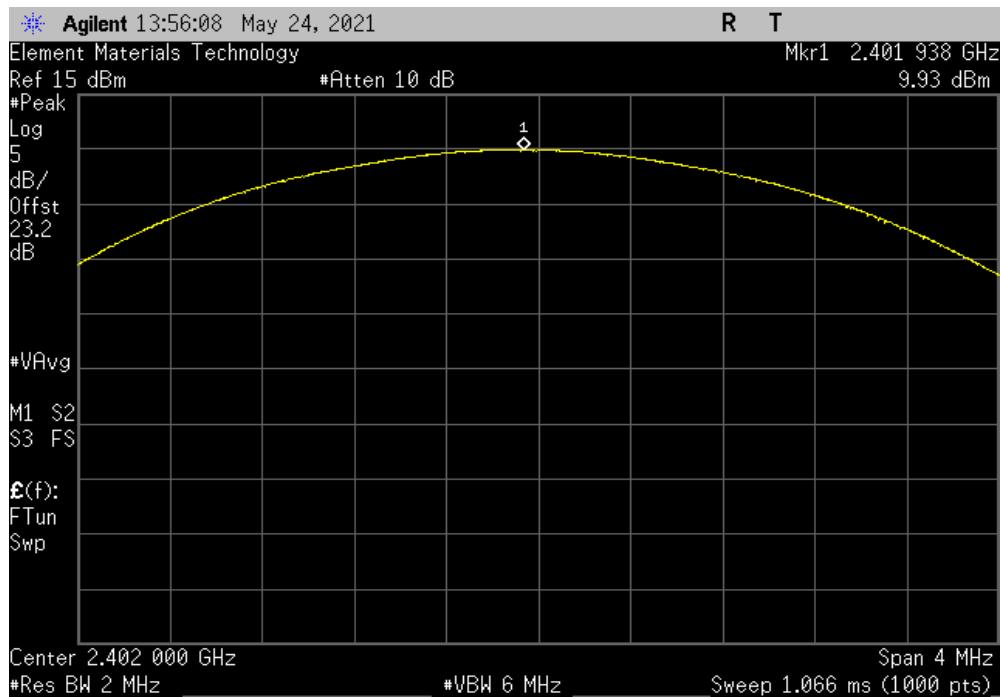

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | |
|-------------------------------------|-------------|--------|
| Out Pwr (dBm) | Limit (dBm) | Result |
| 10.442 | 21 | Pass |

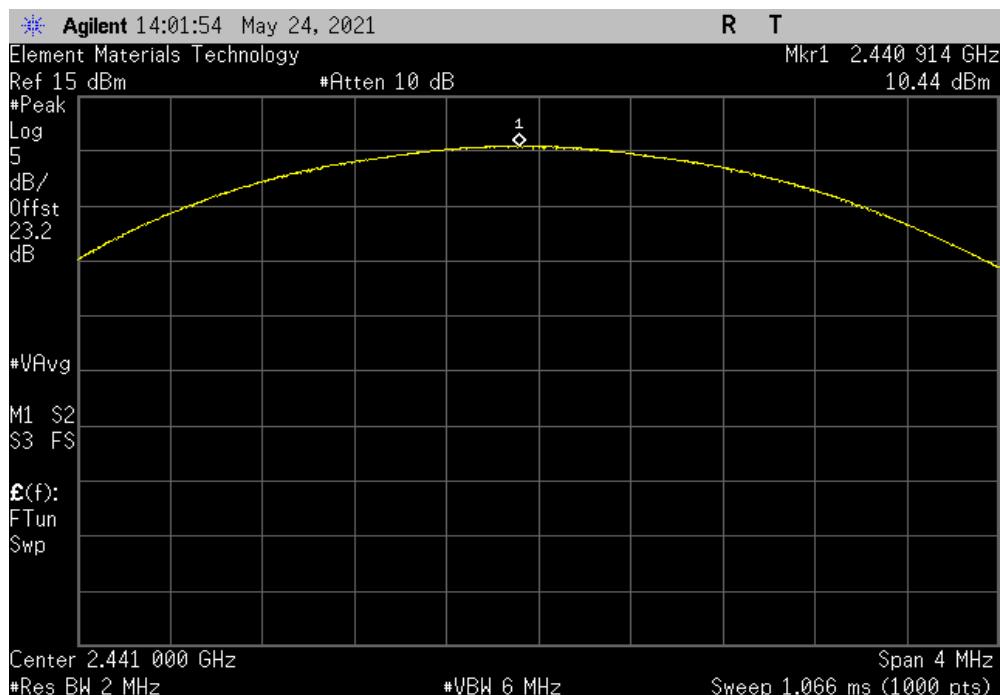


OUTPUT POWER



TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | Out Pwr (dBm) | Limit (dBm) | Result |
|--------------------------------------|--|--|---------------|-------------|--------|
| | | | 10.409 | 21 | Pass |

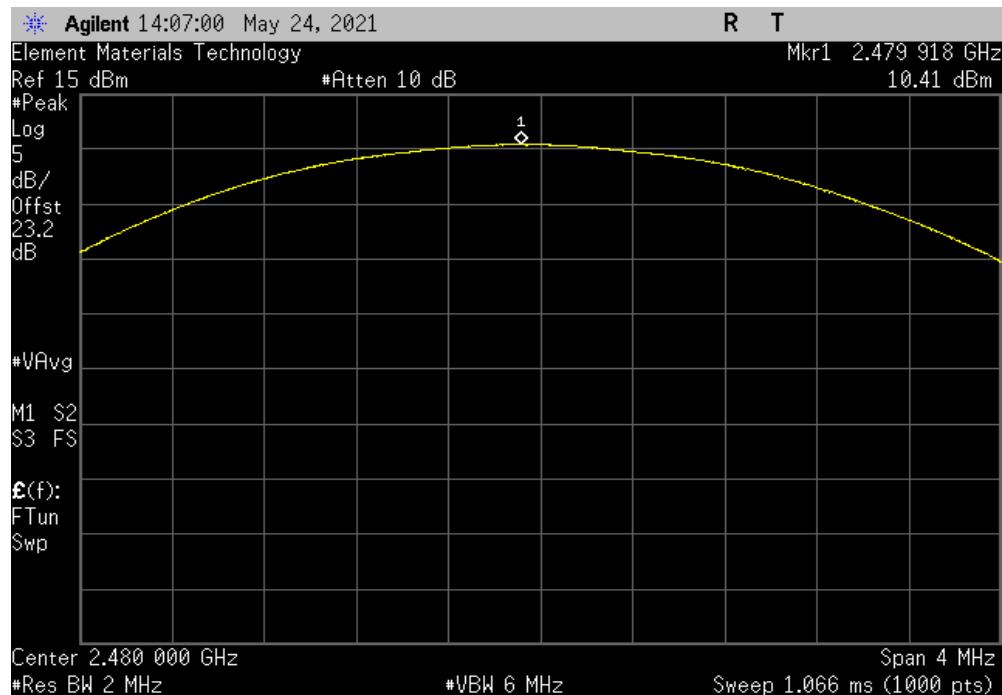

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

The method found in ANSI C63.10:2013 Section 7.8.5 was used for a FHSS radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2021.03.19.1 XMII 2020.12.30.0


| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 | | | |
|--|--------------------------------------|-------------------|--------------------|------------|------------------|--------|
| Serial Number: | FCC 1 | Date: | 24-May-21 | | | |
| Customer: | NAL Research Corporation | Temperature: | 22.6 °C | | | |
| Attendees: | None | Humidity: | 44% RH | | | |
| Project: | None | Barometric Pres.: | 1021 mbar | | | |
| Tested by: | Jeff Alcocke | Power: | 5.0 VDC via USB | | | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2013 | | | |
| FCC 15.247:2021 | | | | | | |
| COMMENTS | | | | | | |
| Reference level offset includes: DC block, 20 dB attenuator, measurement cable, and manufacturers SMA patch cable. | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 3 | Signature | | | | |
| DH5, GFSK | | Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result |
| | Low Channel, 2402 MHz | 11.665 | 3 | 14.7 | 27 | Pass |
| | Mid Channel, 2441 MHz | 11.783 | 3 | 14.8 | 27 | Pass |
| | High Channel, 2480 MHz | 11.47 | 3 | 14.5 | 27 | Pass |
| 2DH5, pi/4-DQPSK | Low Channel, 2402 MHz | 9.266 | 3 | 12.3 | 27 | Pass |
| | Mid Channel, 2441 MHz | 9.891 | 3 | 12.9 | 27 | Pass |
| | High Channel, 2480 MHz | 9.982 | 3 | 13.0 | 27 | Pass |
| 3DH5, 8-DPSK | Low Channel, 2402 MHz | 9.933 | 3 | 12.9 | 27 | Pass |
| | Mid Channel, 2441 MHz | 10.442 | 3 | 13.4 | 27 | Pass |
| | High Channel, 2480 MHz | 10.409 | 3 | 13.4 | 27 | Pass |

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | | | | |
|----------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 11.665 | 3 | 14.7 | 27 | Pass | |

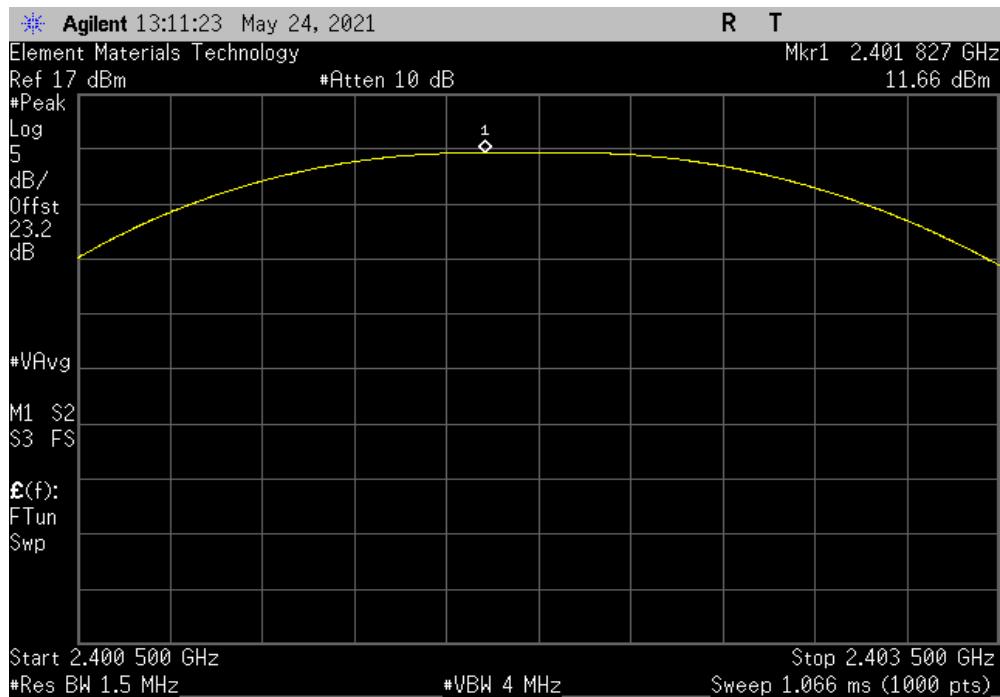

| DH5, GFSK, Mid Channel, 2441 MHz | | | | | |
|----------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 11.783 | 3 | 14.8 | 27 | Pass | |

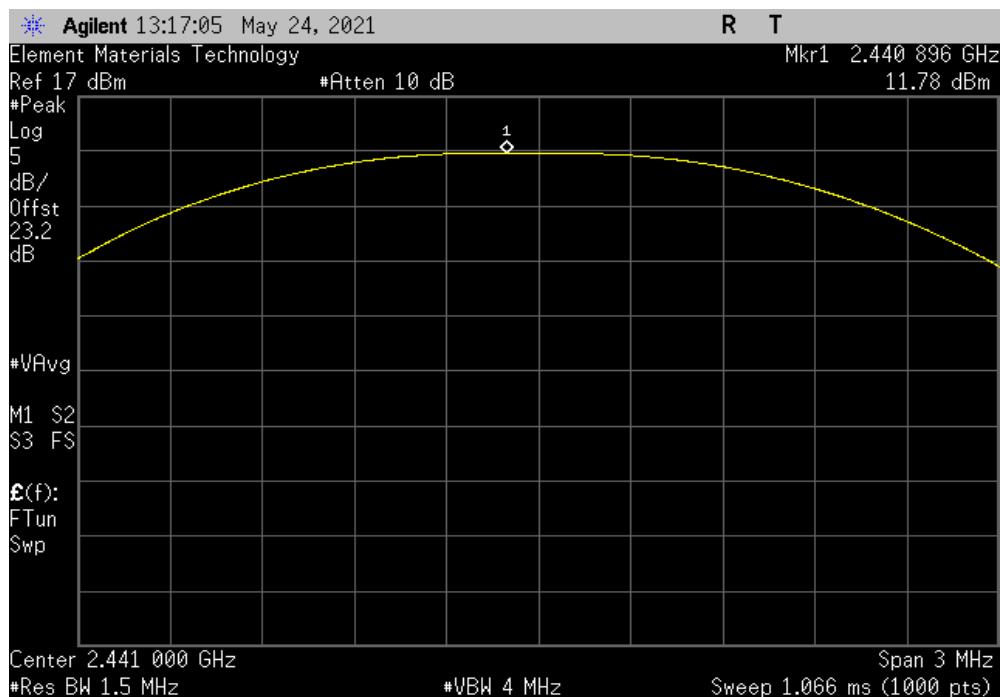


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, High Channel, 2480 MHz | | | | | |
|-----------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 11.47 | 3 | 14.5 | 27 | Pass | |

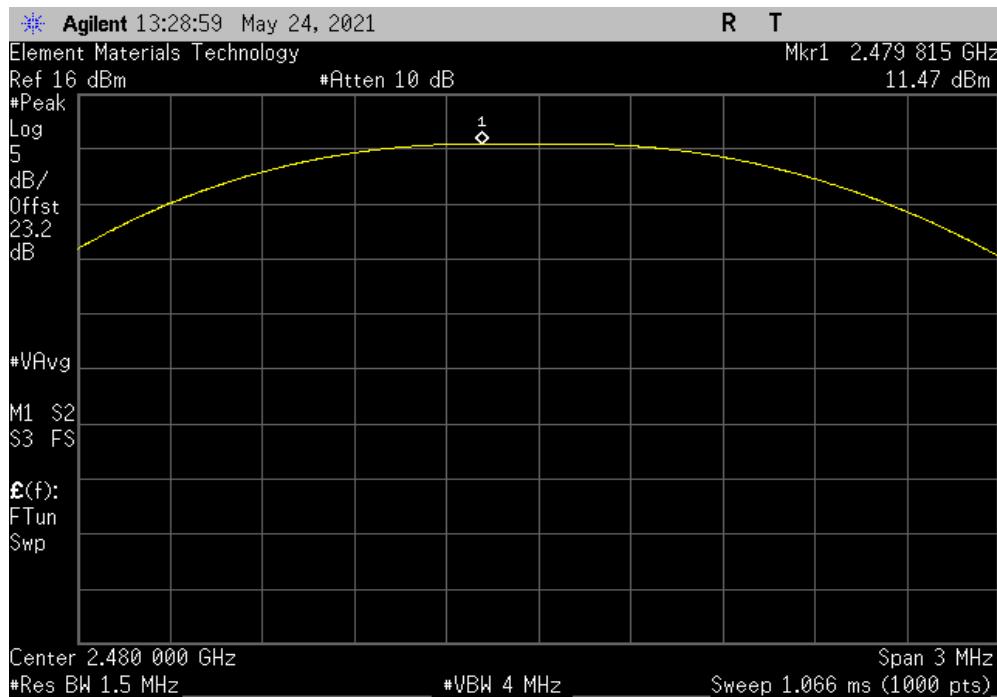

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | | |
|---|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 9.266 | 3 | 12.3 | 27 | Pass | |

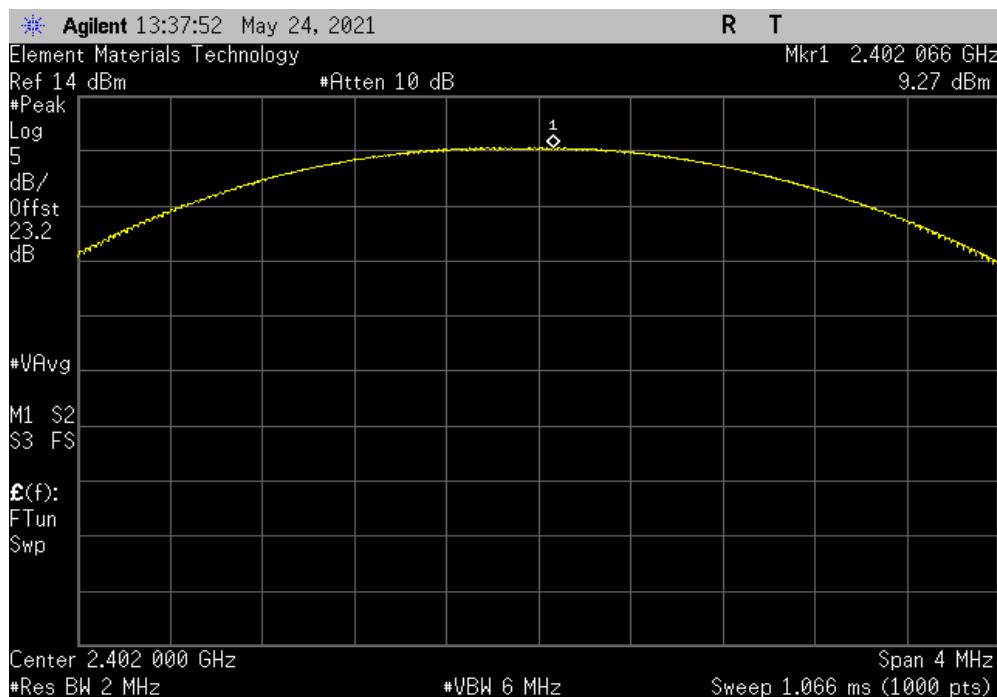


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | |
|---|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 9.891 | 3 | 12.9 | 27 | Pass | |

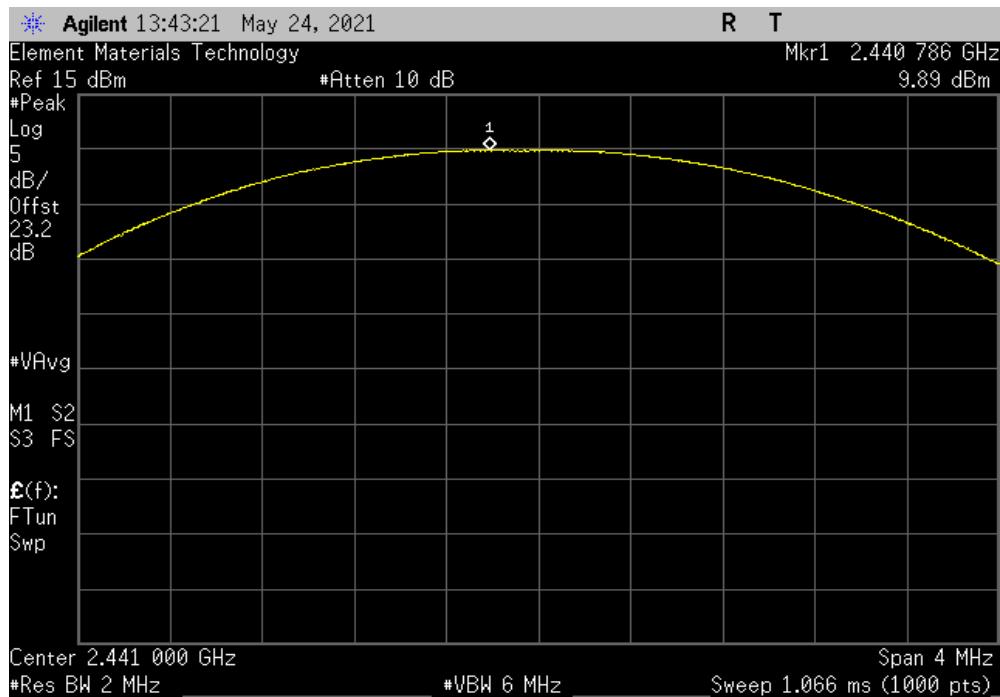

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | | | |
|--|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 9.982 | 3 | 13.0 | 27 | Pass | |

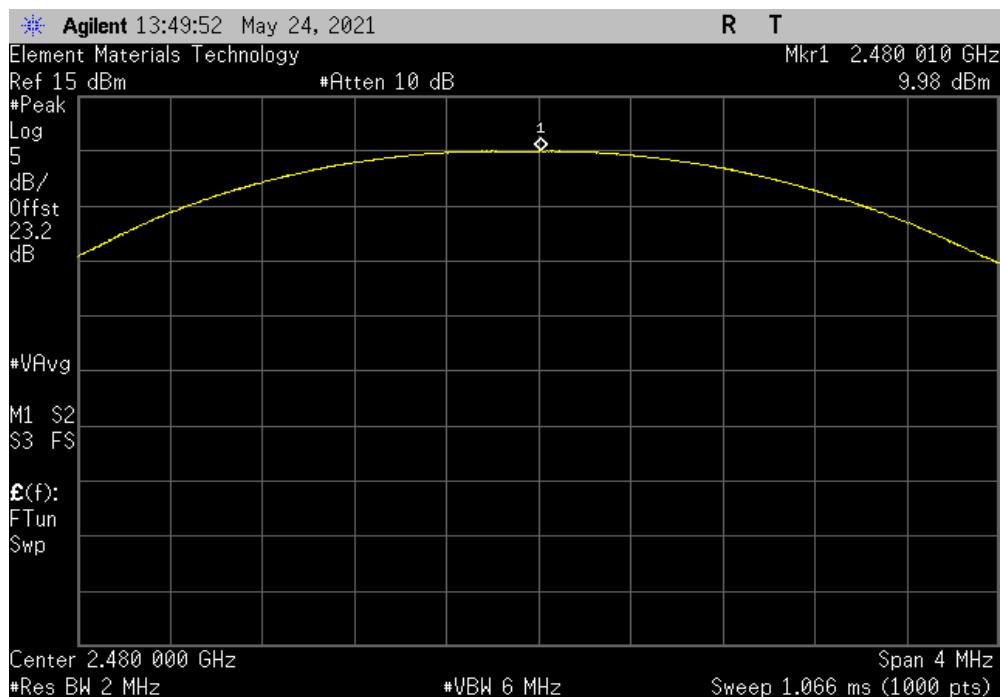


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | | | | |
|-------------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 9.933 | 3 | 12.9 | 27 | Pass | |

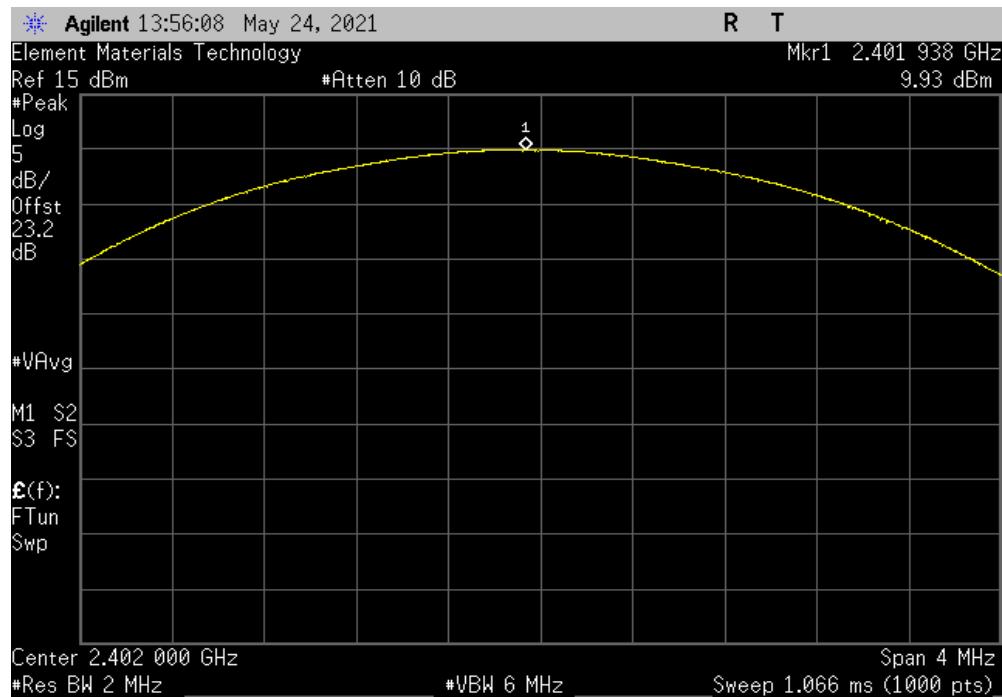

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | |
|-------------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 10.442 | 3 | 13.4 | 27 | Pass | |

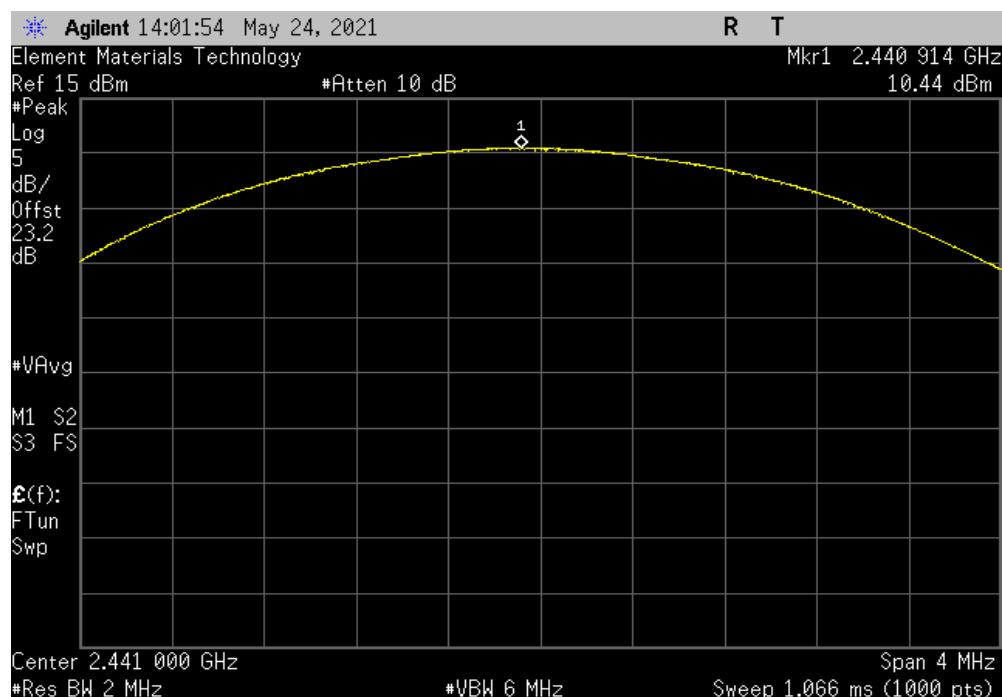


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | | | |
|--------------------------------------|-----------------------|---------------|---------------------|--------|--|
| Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| 10.409 | 3 | 13.4 | 27 | Pass | |

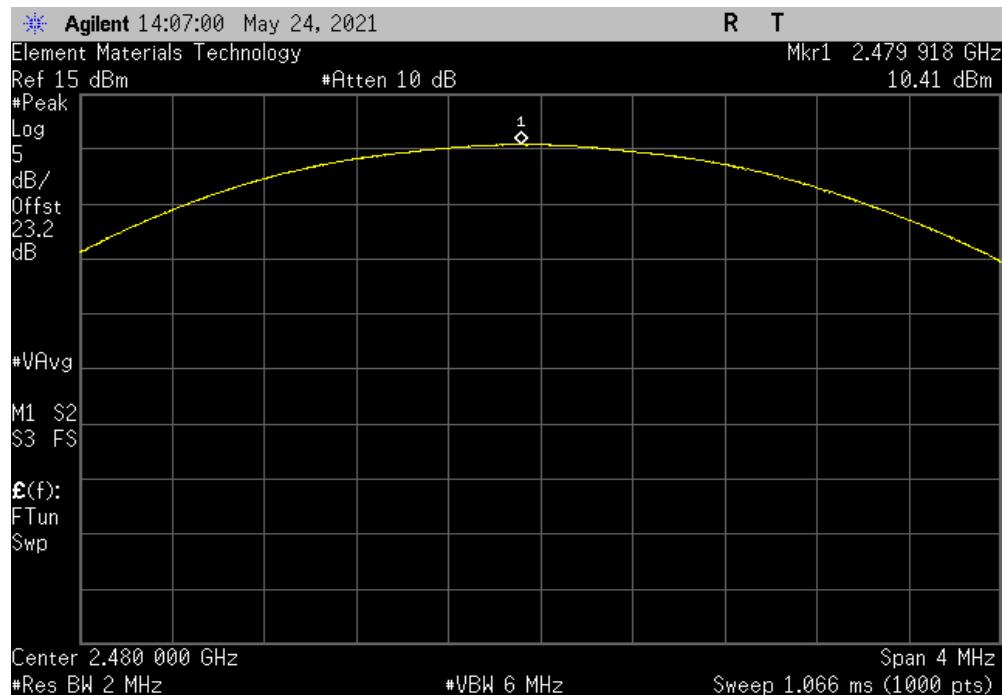

3

3.0

BAND EDGE COMPLIANCE



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet in a no hop mode. The channels closest to the band edges were selected.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TbTx 2021.03.19.1 XMII 2020.12.30.0


| | | | | |
|-------------------------------|--------------------------------------|-------------------|------------------|--------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 | |
| Serial Number: | FCC 1 | Date: | 24-May-21 | |
| Customer: | NAL Research Corporation | Temperature: | 22.6 °C | |
| Attendees: | None | Humidity: | 43.6% RH | |
| Project: | None | Barometric Pres.: | 1019 mbar | |
| Tested by: | Jeff Alcocke | Power: | 5.0 VDC via USB | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2013 | |
| FCC 15.247:2021 | | | | |
| COMMENTS | None | | | |
| DEVIATIONS FROM TEST STANDARD | | | | |
| None | | | | |
| Configuration # | 3 | Signature | | |
| | | | | |
| DH5, GFSK | | Value (dBc) | Limit ≤ (dBc) | Result |
| | Low Channel, 2402 MHz | -59.95 | -20 | Pass |
| | High Channel, 2480 MHz | -61.49 | -20 | Pass |
| 2DH5, pi/4-DQPSK | | | | |
| | Low Channel, 2402 MHz | -52.41 | -20 | Pass |
| | High Channel, 2480 MHz | -51.85 | -20 | Pass |
| 3DH5, 8-DPSK | | | | |
| | Low Channel, 2402 MHz | -51.94 | -20 | Pass |
| | High Channel, 2480 MHz | -51.46 | -20 | Pass |

BAND EDGE COMPLIANCE




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | |
|----------------------------------|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -59.95 | -20 | Pass |

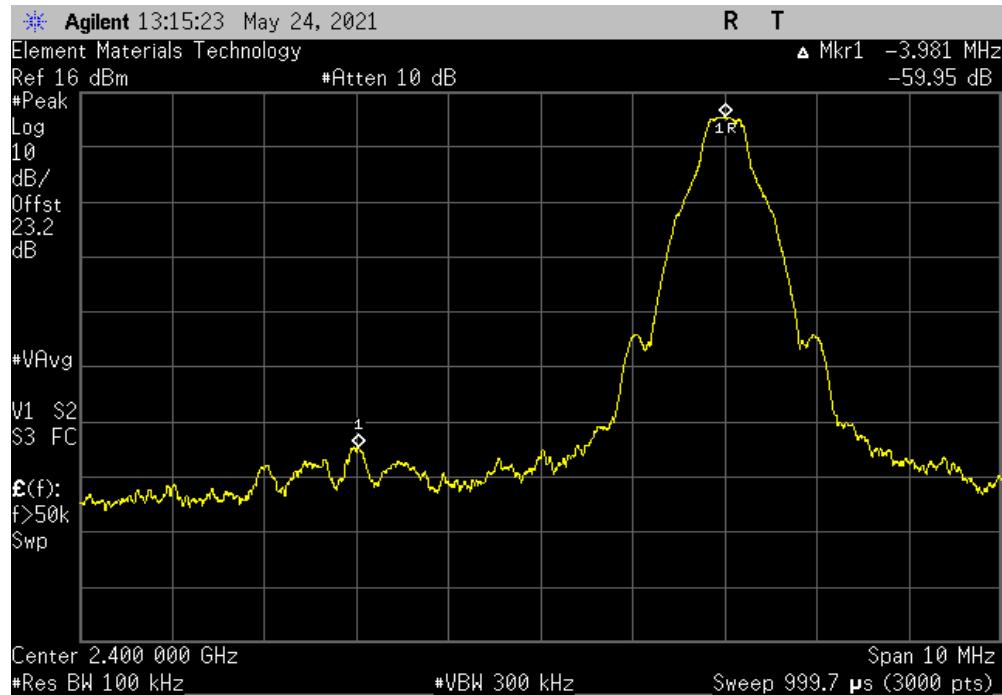

| DH5, GFSK, High Channel, 2480 MHz | | |
|-----------------------------------|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -61.49 | -20 | Pass |

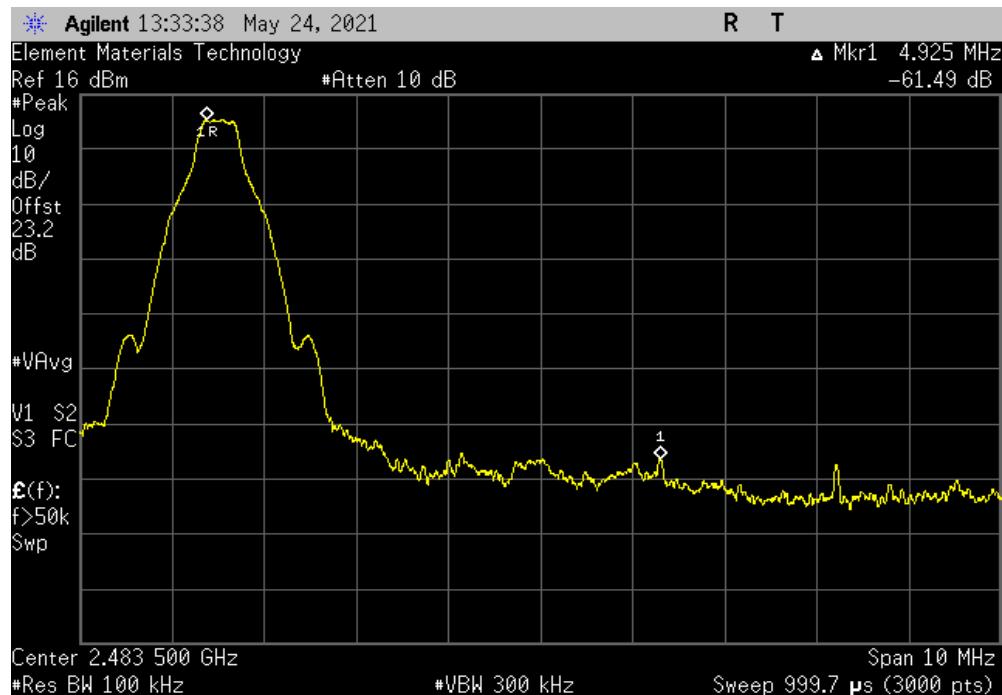


BAND EDGE COMPLIANCE




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | |
|---|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -52.41 | -20 | Pass |

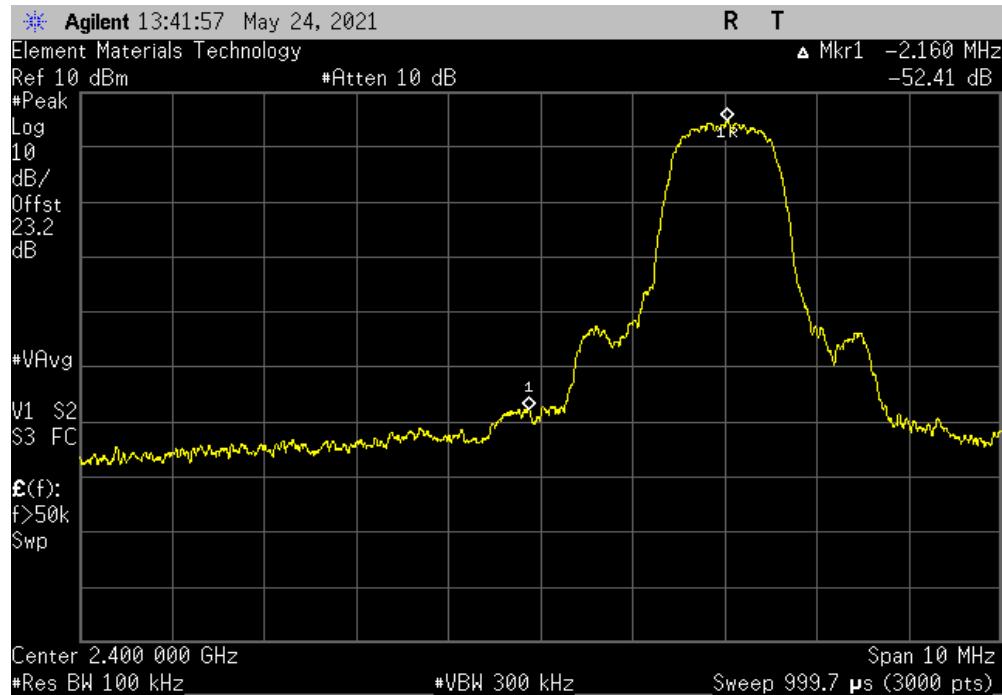

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | |
|--|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -51.85 | -20 | Pass |

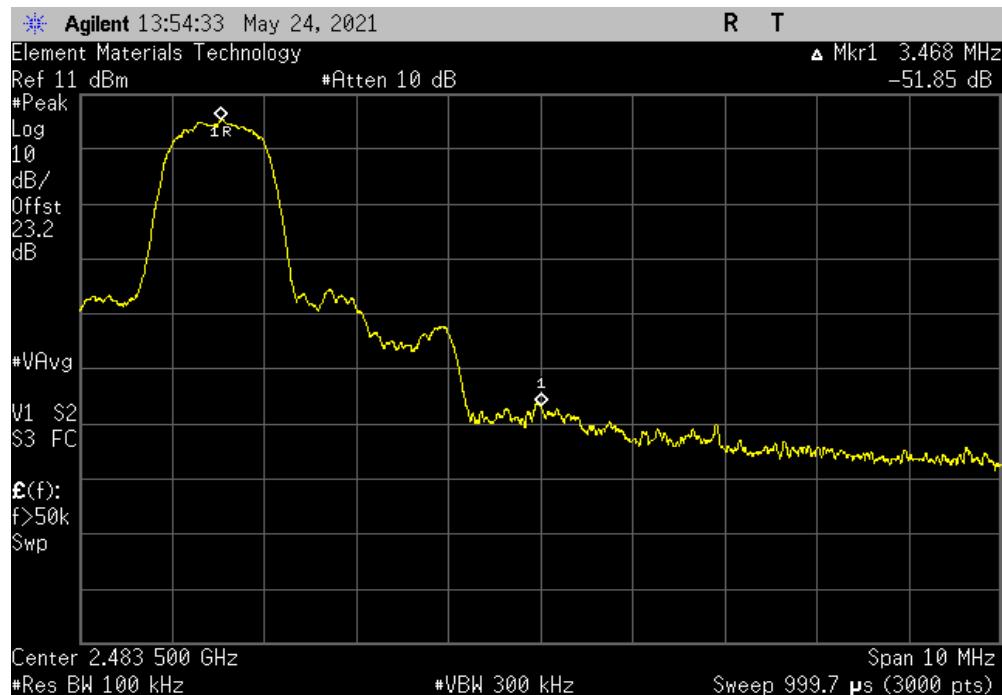


BAND EDGE COMPLIANCE




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | |
|-------------------------------------|----------------|------------------|
| | Value (dBc) | Limit ≤ (dBc) |
| | -51.94 | -20 |

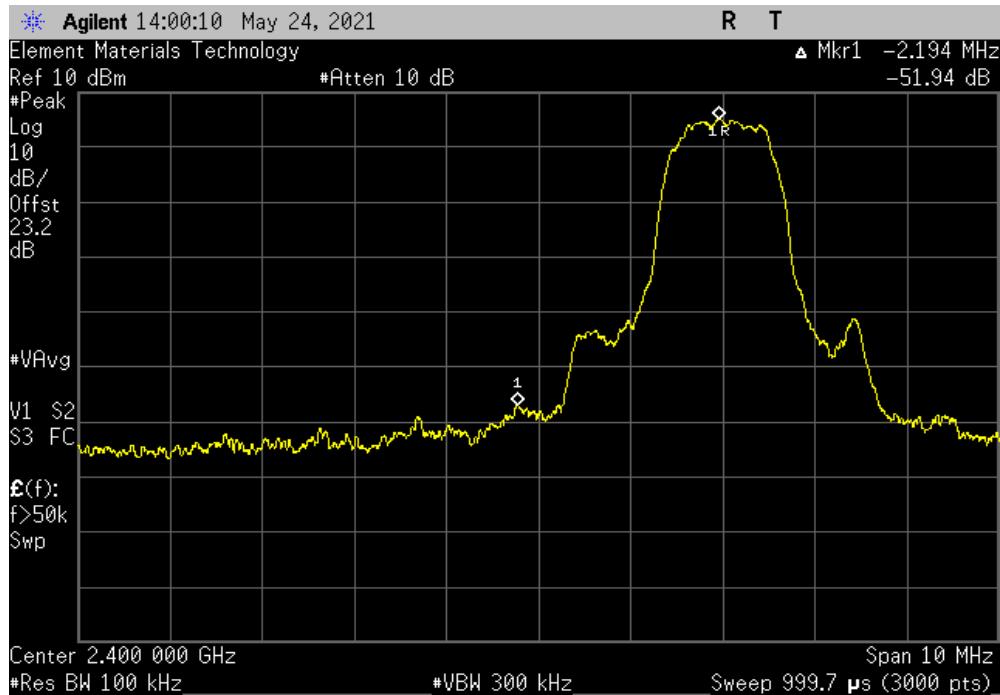

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | |
|--------------------------------------|----------------|------------------|
| | Value (dBc) | Limit ≤ (dBc) |
| | -51.46 | -20 |

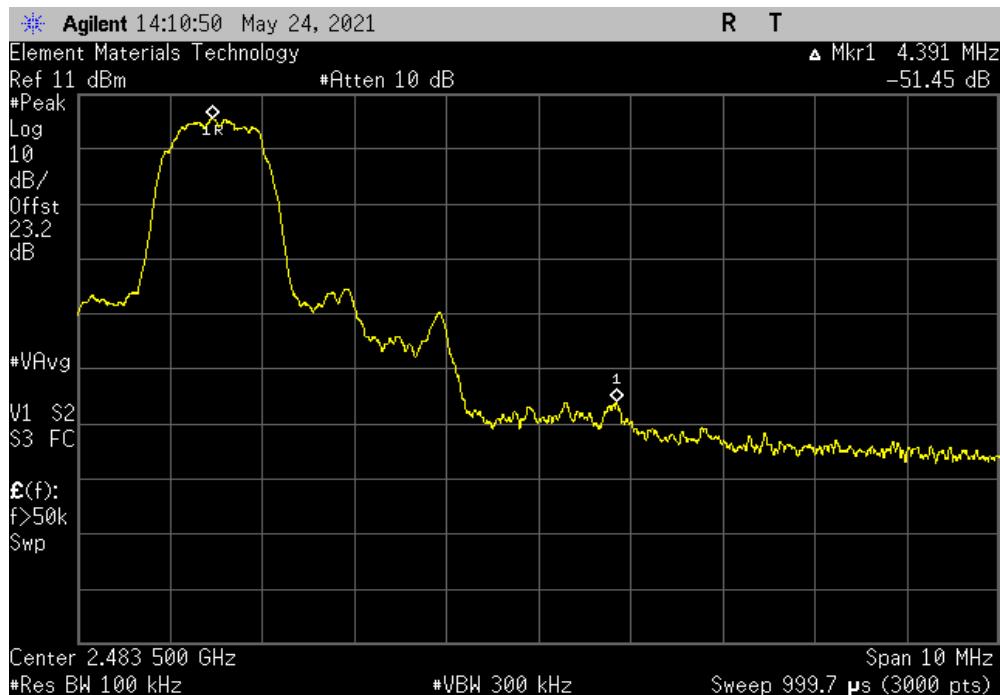

BAND EDGE COMPLIANCE - HOPPING MODE



XMil 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to its normal pseudo-random hopping sequence. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE - HOPPING MODE



TbTx 2021.03.19.1 XMII 2020.12.30.0

| | | | | | | |
|-------------------------------|--------------------------------------|------------------|-------------------|-------------|---------------|--------|
| EUT: | SHOUT sp Handheld Iridium Smartphone | | Work Order: | PCTE0003 | | |
| Serial Number: | FCC 1 | | Date: | 24-May-21 | | |
| Customer: | NAL Research Corporation | | Temperature: | 22.6 °C | | |
| Attendees: | None | | Humidity: | 43.7% RH | | |
| Project: | None | | Barometric Pres.: | 1022 mbar | | |
| Tested by: | Jeff Alcocke | Power: | 5.0 VDC via USB | Job Site: | EV06 | |
| TEST SPECIFICATIONS | | Test Method | | | | |
| FCC 15.247:2021 | | ANSI C63.10:2013 | | | | |
| COMMENTS | | | | | | |
| None | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 3 | Signature | Jeff Alcocke | Value (dBc) | Limit ≤ (dBc) | Result |
| Hopping Mode (All Channels) | | | | | | |
| DH5, GFSK | | | | | | |
| Low Channel, 2402 MHz | | | -60.11 | -20 | Pass | |
| High Channel, 2480 MHz | | | -56.06 | -20 | Pass | |
| 2DH5, pi/4-DQPSK | | | | | | |
| Low Channel, 2402 MHz | | | -56.25 | -20 | Pass | |
| High Channel, 2480 MHz | | | -55.53 | -20 | Pass | |
| 3DH5, 8-DPSK | | | | | | |
| Low Channel, 2402 MHz | | | -57.92 | -20 | Pass | |
| High Channel, 2480 MHz | | | -53.25 | -20 | Pass | |


BAND EDGE COMPLIANCE - HOPPING MODE



TbtTx 2021.03.19.1 XMit 2020.12.30.0


Hopping Mode (All Channels), DH5, GFSK, Low Channel, 2402 MHz

| | Value (dBc) | Limit ≤ (dBc) | Result |
|--|----------------|------------------|--------|
| | -60.11 | -20 | Pass |

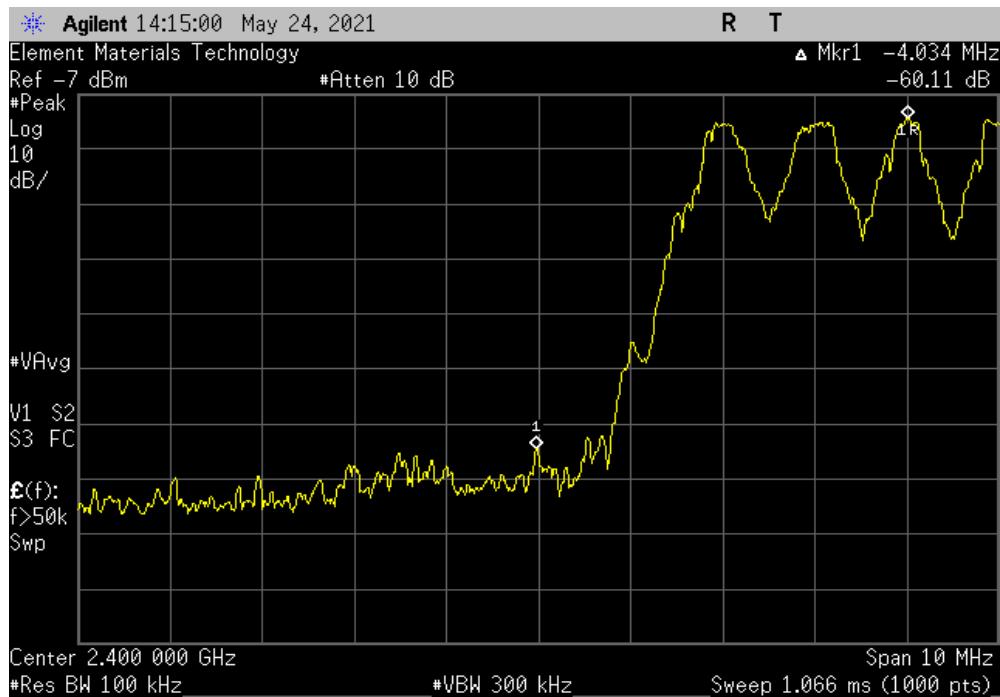

Hopping Mode (All Channels), DH5, GFSK, High Channel, 2480 MHz

| | Value (dBc) | Limit ≤ (dBc) | Result |
|--|----------------|------------------|--------|
| | -56.06 | -20 | Pass |

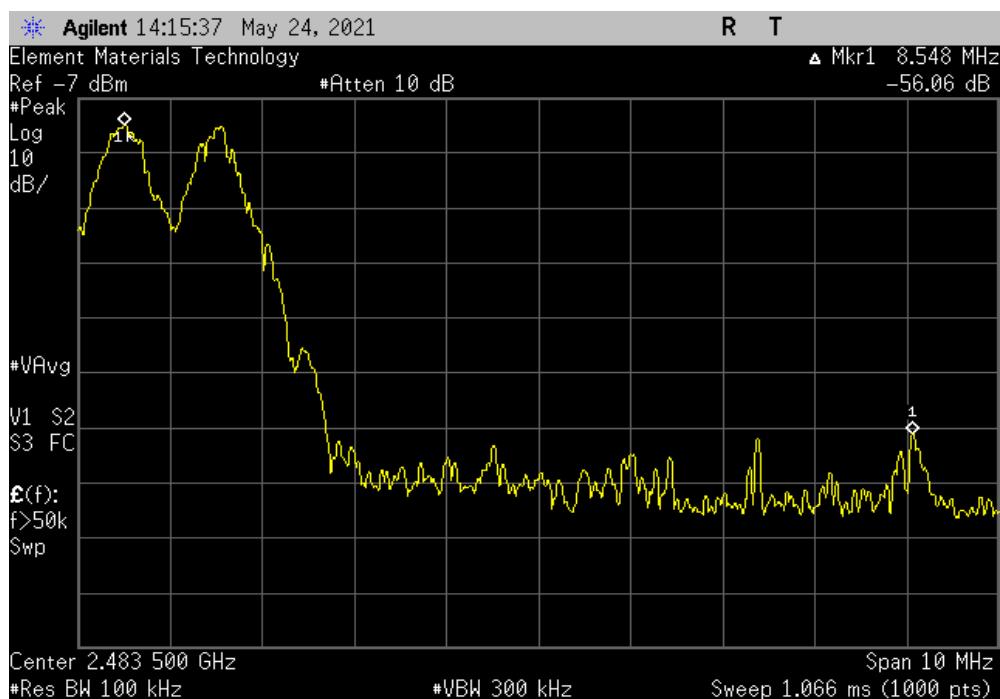


BAND EDGE COMPLIANCE - HOPPING MODE



TbtTx 2021.03.19.1 XMit 2020.12.30.0


Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz

| Value (dBc) | Limit ≤ (dBc) | Result |
|----------------|------------------|--------|
| -56.25 | -20 | Pass |

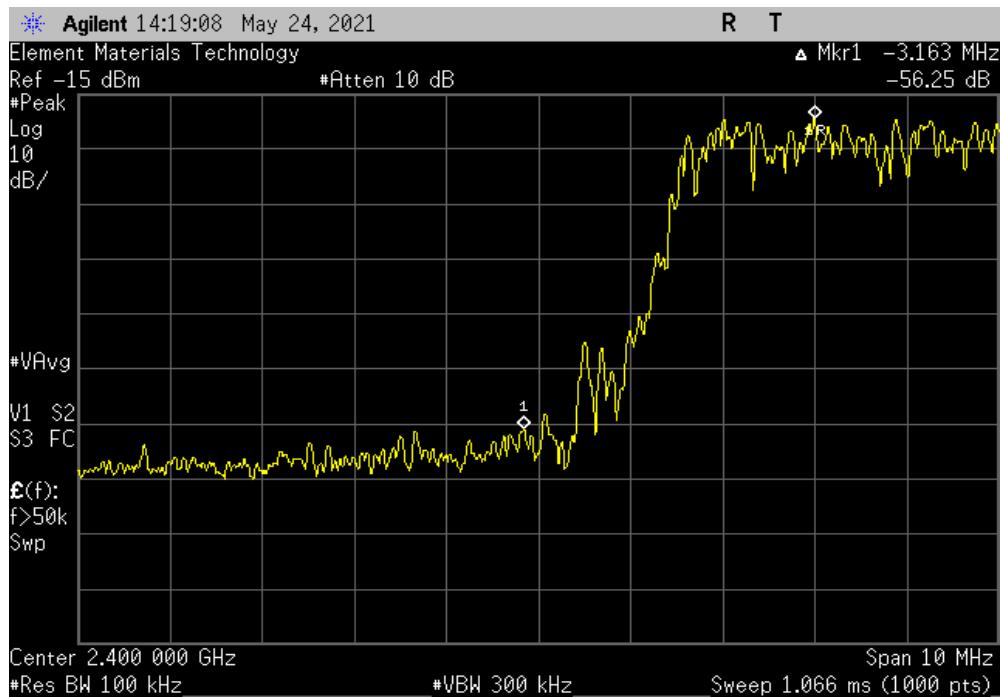

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, High Channel, 2480 MHz

| Value (dBc) | Limit ≤ (dBc) | Result |
|----------------|------------------|--------|
| -55.53 | -20 | Pass |

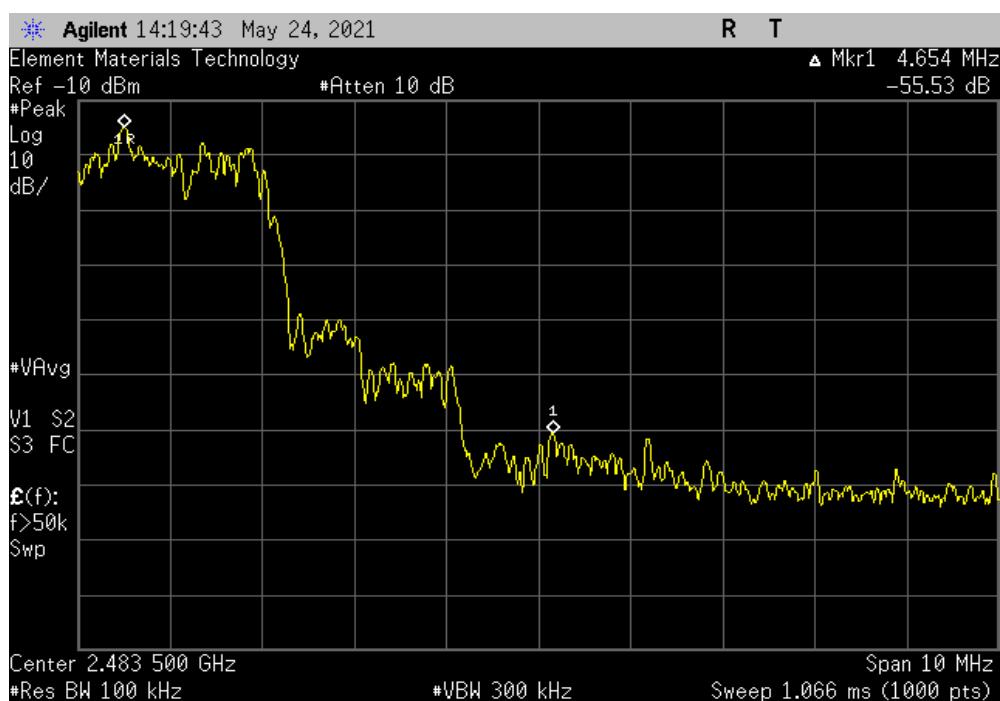


BAND EDGE COMPLIANCE - HOPPING MODE




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| Hopping Mode (All Channels), 3DH5, 8-DPSK, Low Channel, 2402 MHz | | |
|--|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -57.92 | -20 | Pass |

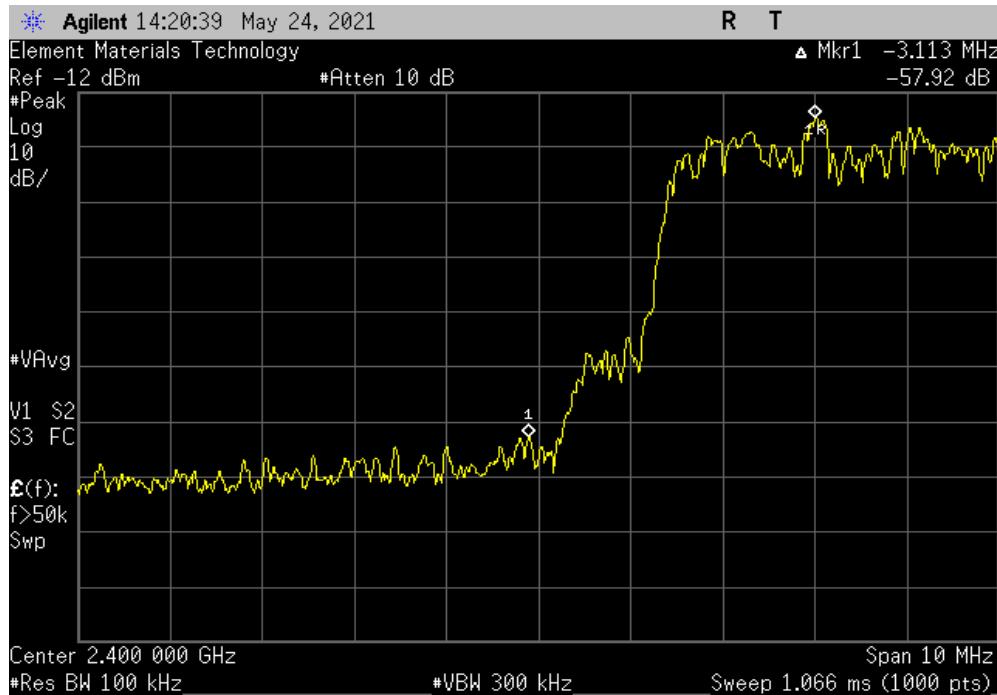

| Hopping Mode (All Channels), 3DH5, 8-DPSK, High Channel, 2480 MHz | | |
|---|------------------|--------|
| Value (dBc) | Limit ≤ (dBc) | Result |
| -53.25 | -20 | Pass |

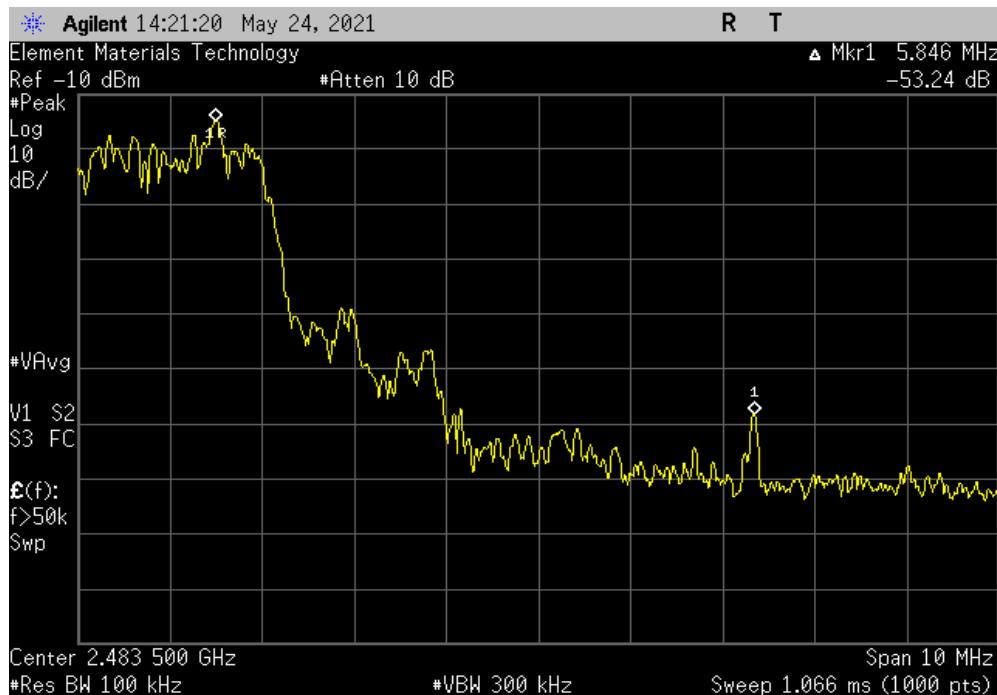

OCCUPIED BANDWIDTH



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The 20 dB occupied bandwidth was measured with the EUT set to low, medium and high transmit frequencies in the band. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode.

OCCUPIED BANDWIDTH



TbTx 2021.03.19.1

XMB 2020.12.30.0

| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 | |
|-------------------------------|--------------------------------------|-------------------|------------------|--------|
| Serial Number: | FCC 1 | Date: | 24-May-21 | |
| Customer: | NAL Research Corporation | Temperature: | 22.5 °C | |
| Attendees: | None | Humidity: | 44.2% RH | |
| Project: | None | Barometric Pres.: | 1021 mbar | |
| Tested by: | Jeff Alcock | Power: | 5.0 VDC via USB | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2013 | |
| FCC 15.247:2021 | | | | |
| COMMENTS | None | | | |
| DEVIATIONS FROM TEST STANDARD | | | | |
| None | | | | |
| Configuration # | 3 | Signature | | |
| | | Value | Limit (<) | Result |
| DH5, GFSK | | | | |
| | Low Channel, 2402 MHz | 884.527 kHz | 1.5 MHz | Pass |
| | Mid Channel, 2441 MHz | 883.153 kHz | 1.5 MHz | Pass |
| | High Channel, 2480 MHz | 886.375 kHz | 1.5 MHz | Pass |
| 2DH5, pi/4-DQPSK | | | | |
| | Low Channel, 2402 MHz | 1.36 MHz | 1.5 MHz | Pass |
| | Mid Channel, 2441 MHz | 1.363 MHz | 1.5 MHz | Pass |
| | High Channel, 2480 MHz | 1.375 MHz | 1.5 MHz | Pass |
| 3DH5, 8-DPSK | | | | |
| | Low Channel, 2402 MHz | 1.348 MHz | 1.5 MHz | Pass |
| | Mid Channel, 2441 MHz | 1.349 MHz | 1.5 MHz | Pass |
| | High Channel, 2480 MHz | 1.352 MHz | 1.5 MHz | Pass |

OCCUPIED BANDWIDTH




TbtTx 2021.03.19.1

XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | | | Limit | Result |
|----------------------------------|-------------|---------|------|-------|--------|
| | | | | (<) | |
| Value | 884.527 kHz | 1.5 MHz | Pass | | |
| | | | | | |



| DH5, GFSK, Mid Channel, 2441 MHz | | | | | | |
|----------------------------------|--|--|-------------|---------|--------|--|
| | | | Limit | | | |
| | | | Value | (<) | Result | |
| | | | 883.153 kHz | 1.5 MHz | Pass | |

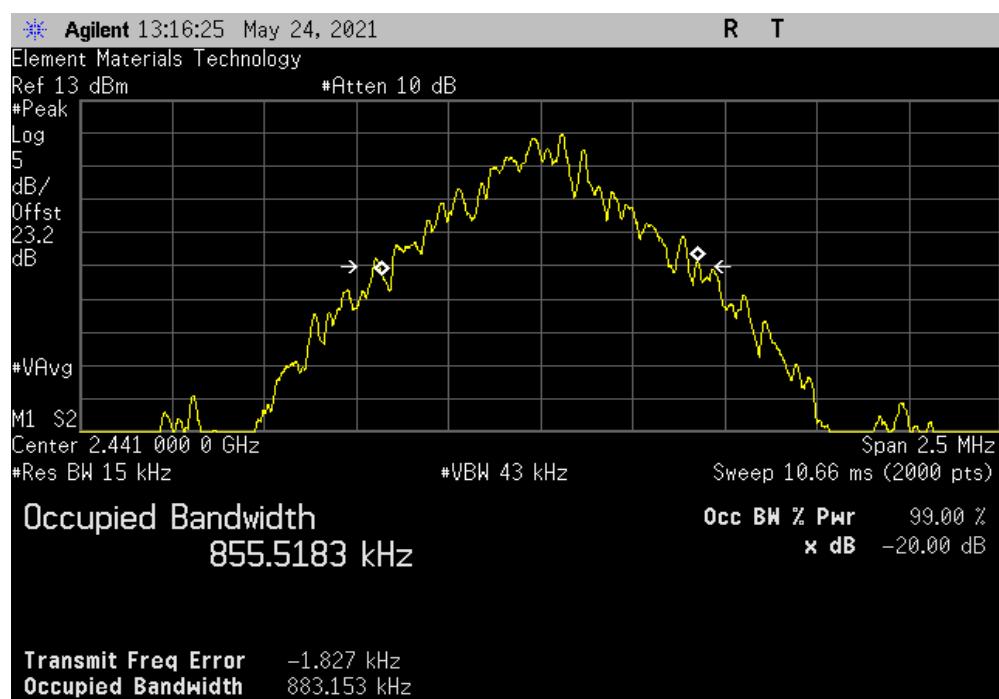


OCCUPIED BANDWIDTH




TbtTx 2021.03.19.1

XMit 2020.12.30.0

| DH5, GFSK, High Channel, 2480 MHz | | | | Limit | Result |
|-----------------------------------|--|-------------|---------|-------|--------|
| | | Value | (<) | | |
| | | 886.375 kHz | 1.5 MHz | | Pass |

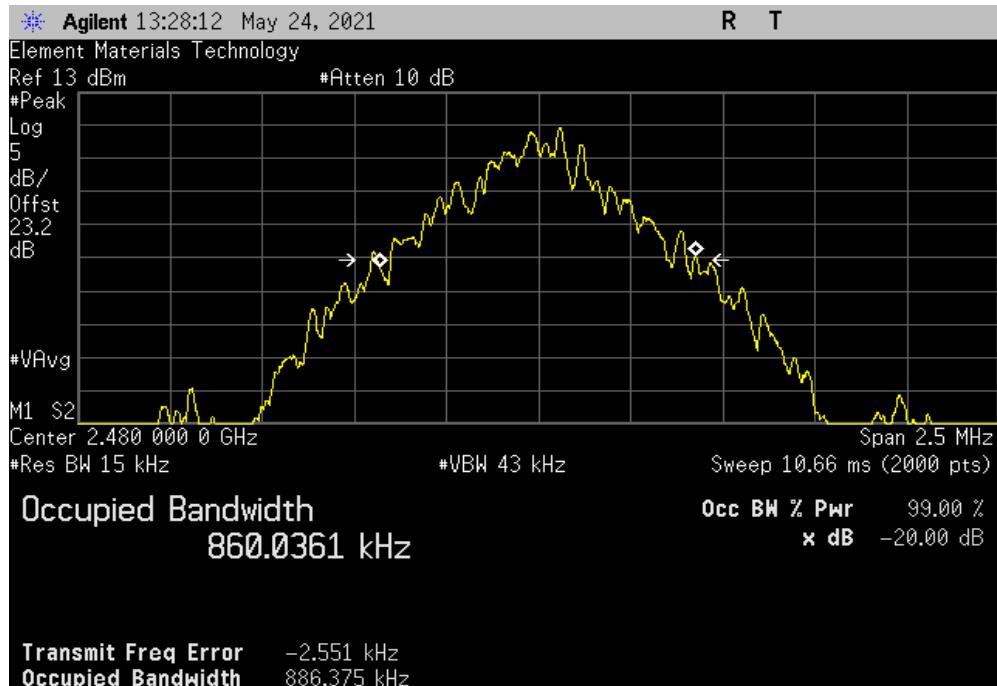

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | | | |
|---|--|--|----------|---------|--------|--|
| | | | Limit | | | |
| | | | Value | (<) | Result | |
| | | | 1.36 MHz | 1.5 MHz | Pass | |

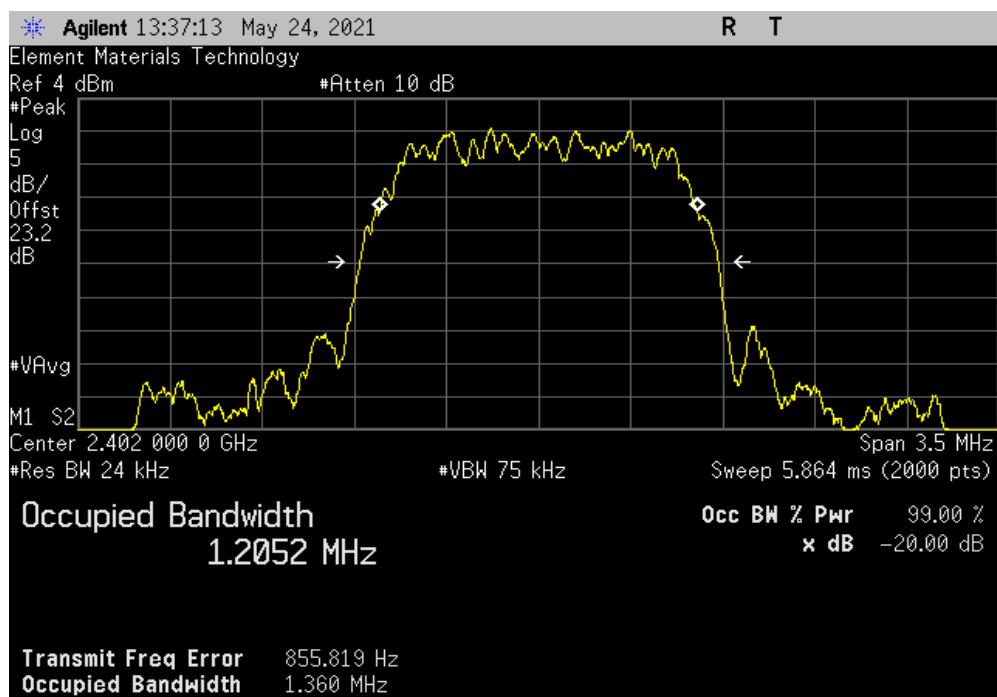


OCCUPIED BANDWIDTH




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | Value | Limit (≤) | Result |
|---|--|--|-----------|-----------|--------|
| | | | 1.363 MHz | 1.5 MHz | Pass |

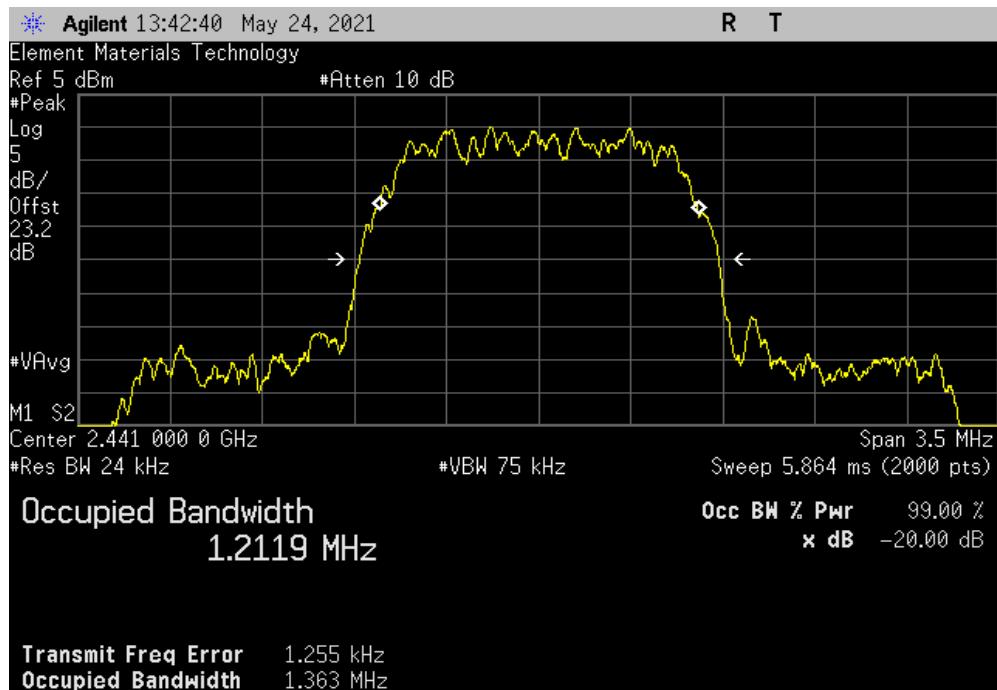

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | Value | Limit (≤) | Result |
|--|--|--|-----------|-----------|--------|
| | | | 1.375 MHz | 1.5 MHz | Pass |

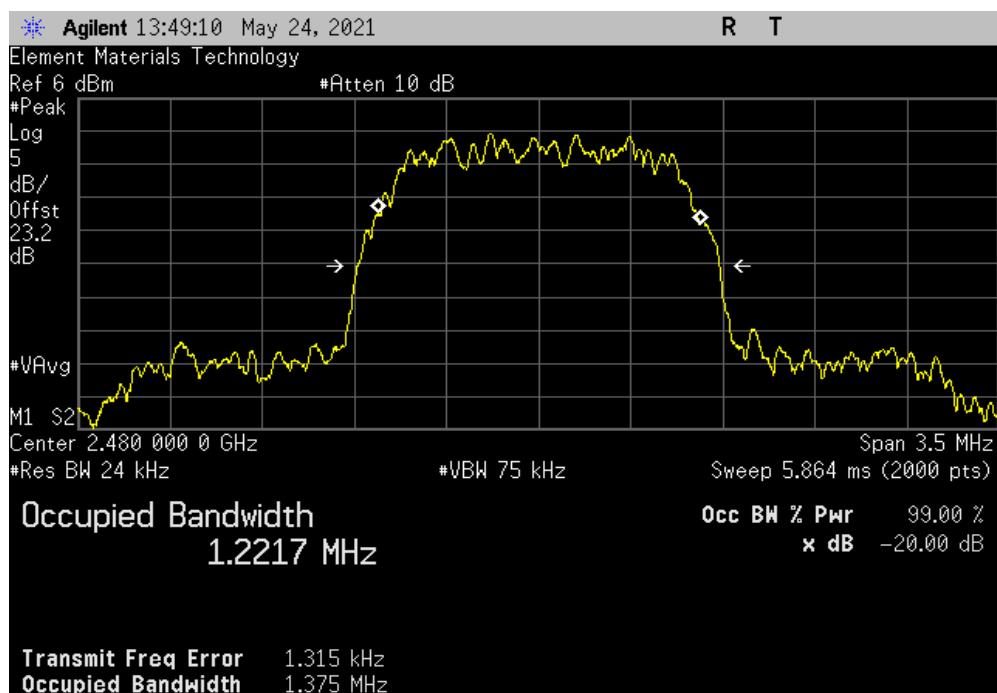


OCCUPIED BANDWIDTH




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | | Value | Limit (≤) | Result |
|-------------------------------------|--|--|-----------|-----------|--------|
| | | | 1.348 MHz | 1.5 MHz | Pass |

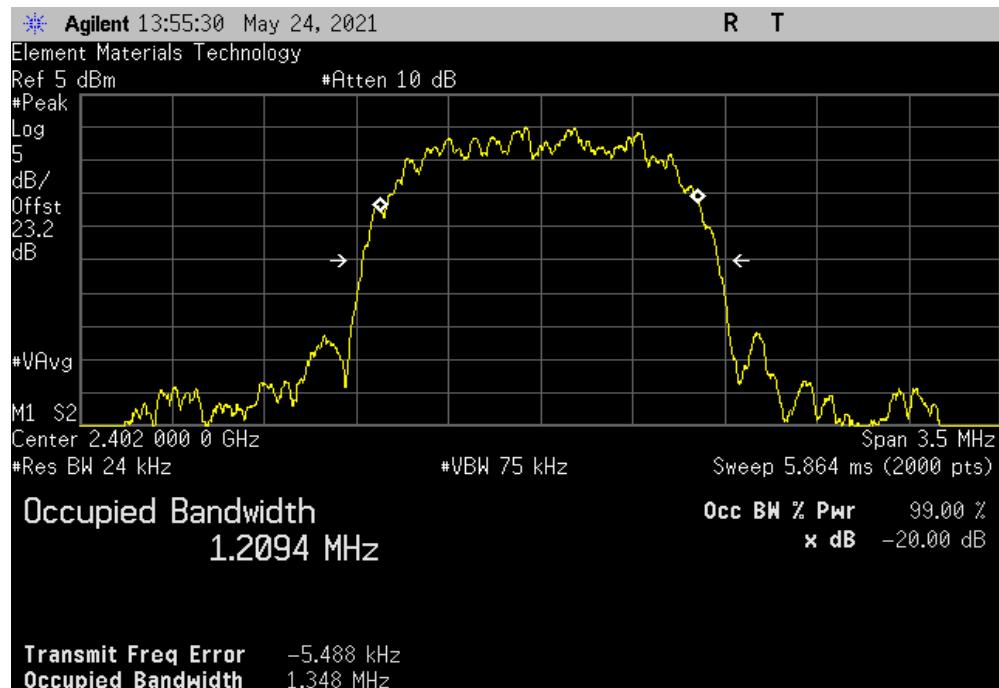

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | Value | Limit (≤) | Result |
|-------------------------------------|--|--|-----------|-----------|--------|
| | | | 1.349 MHz | 1.5 MHz | Pass |

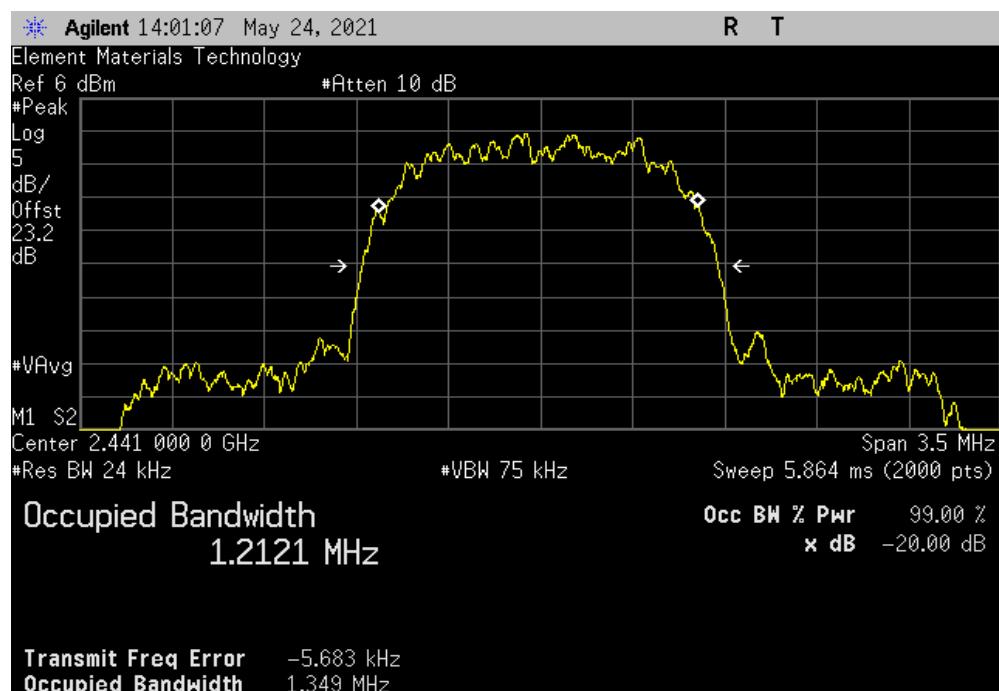


OCCUPIED BANDWIDTH



TbtTx 2021.03.19.1

XMit 2020.12.30.0

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | | | | |
|--------------------------------------|--|--|--|-----------|--------------|--------|
| | | | | Value | Limit (<) | Result |
| | | | | 1.352 MHz | 1.5 MHz | Pass |

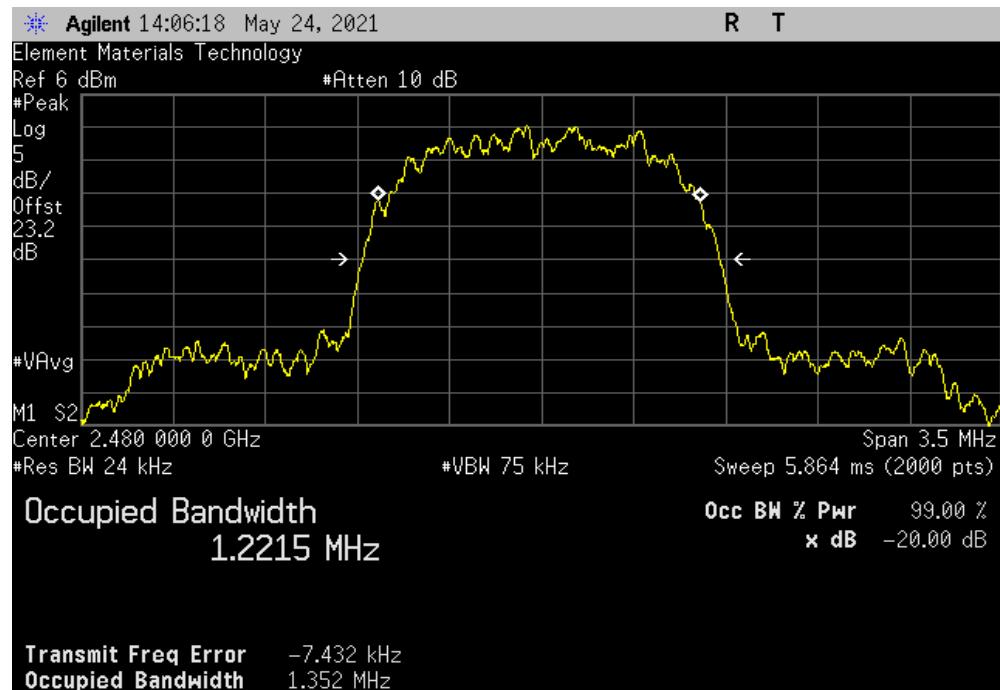

SPURIOUS CONDUCTED EMISSIONS



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------------|-----|------------|------------|
| Generator - Signal | Agilent | N5181A | TIG | 2020-04-16 | 2023-04-16 |
| Cable | Micro-Coax | UFD150A-1-0720-200200 | EVH | 2021-03-14 | 2022-03-14 |
| Attenuator | S.M. Electronics | SA26B-20 | AUY | 2021-03-14 | 2022-03-14 |
| Block - DC | Fairview Microwave | SD3379 | AMW | 2021-03-14 | 2022-03-14 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFE | 2021-04-08 | 2022-04-08 |

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

SPURIOUS CONDUCTED EMISSIONS



TbTx 2021.03.19.1 XMII 2020.12.30.0


| EUT: | SHOUT sp Handheld Iridium Smartphone | Work Order: | PCTE0003 | | | |
|-------------------------------|--|-------------------|---------------------|-----------------|---------------|--------|
| Serial Number: | FCC 1 | Date: | 24-May-21 | | | |
| Customer: | NAL Research Corporation | Temperature: | 22.8 °C | | | |
| Attendees: | None | Humidity: | 44.1% RH | | | |
| Project: | None | Barometric Pres.: | 1021 mbar | | | |
| Tested by: | Jeff Alcocke | Power: | 5.0 VDC via USB | | | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2013 | | | |
| FCC 15.247:2021 | | | | | | |
| COMMENTS | Reference level offset includes: DC block, 20 dB attenuator, measurement cable, and manufacturers SMA patch cable. | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 3 | Signature | | | | |
| | | Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| DH5, GFSK | | | | | | |
| Low Channel, 2402 MHz | Fundamental | 2402.04 | N/A | N/A | N/A | |
| Low Channel, 2402 MHz | 30 MHz - 12.5 GHz | 4804.3 | -49.33 | -20 | Pass | |
| Low Channel, 2402 MHz | 12.5 GHz - 25 GHz | 24789.4 | -62.75 | -20 | Pass | |
| Mid Channel, 2441 MHz | Fundamental | 2441.05 | N/A | N/A | N/A | |
| Mid Channel, 2441 MHz | 30 MHz - 12.5 GHz | 4881.9 | -47.27 | -20 | Pass | |
| Mid Channel, 2441 MHz | 12.5 GHz - 25 GHz | 24339.2 | -63.05 | -20 | Pass | |
| High Channel, 2480 MHz | Fundamental | 2480.05 | N/A | N/A | N/A | |
| High Channel, 2480 MHz | 30 MHz - 12.5 GHz | 4961.1 | -46.9 | -20 | Pass | |
| High Channel, 2480 MHz | 12.5 GHz - 25 GHz | 24502.5 | -62.45 | -20 | Pass | |
| 2DH5, pi/4-DQPSK | | | | | | |
| Low Channel, 2402 MHz | Fundamental | 2402.03 | N/A | N/A | N/A | |
| Low Channel, 2402 MHz | 30 MHz - 12.5 GHz | 4804.3 | -55.01 | -20 | Pass | |
| Low Channel, 2402 MHz | 12.5 GHz - 25 GHz | 23469.4 | -56.09 | -20 | Pass | |
| Mid Channel, 2441 MHz | Fundamental | 2441.03 | N/A | N/A | N/A | |
| Mid Channel, 2441 MHz | 30 MHz - 12.5 GHz | 4881.9 | -52.51 | -20 | Pass | |
| Mid Channel, 2441 MHz | 12.5 GHz - 25 GHz | 24824.5 | -56.5 | -20 | Pass | |
| High Channel, 2480 MHz | Fundamental | 2480.03 | N/A | N/A | N/A | |
| High Channel, 2480 MHz | 30 MHz - 12.5 GHz | 4959.5 | -50.4 | -20 | Pass | |
| High Channel, 2480 MHz | 12.5 GHz - 25 GHz | 24890.1 | -56.3 | -20 | Pass | |
| 3DH5, 8-DPSK | | | | | | |
| Low Channel, 2402 MHz | Fundamental | 2402.09 | N/A | N/A | N/A | |
| Low Channel, 2402 MHz | 30 MHz - 12.5 GHz | 4804.3 | -55.1 | -20 | Pass | |
| Low Channel, 2402 MHz | 12.5 GHz - 25 GHz | 24845.9 | -56.29 | -20 | Pass | |
| Mid Channel, 2441 MHz | Fundamental | 2441.1 | N/A | N/A | N/A | |
| Mid Channel, 2441 MHz | 30 MHz - 12.5 GHz | 4881.9 | -52.34 | -20 | Pass | |
| Mid Channel, 2441 MHz | 12.5 GHz - 25 GHz | 24879.4 | -56.2 | -20 | Pass | |
| High Channel, 2480 MHz | Fundamental | 2480.09 | N/A | N/A | N/A | |
| High Channel, 2480 MHz | 30 MHz - 12.5 GHz | 4959.5 | -49.54 | -20 | Pass | |
| High Channel, 2480 MHz | 12.5 GHz - 25 GHz | 23486.1 | -57.54 | -20 | Pass | |

SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | | | | |
|----------------------------------|---------------------|-----------------|---------------|--------|-----|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2402.04 | N/A | N/A | N/A | N/A |

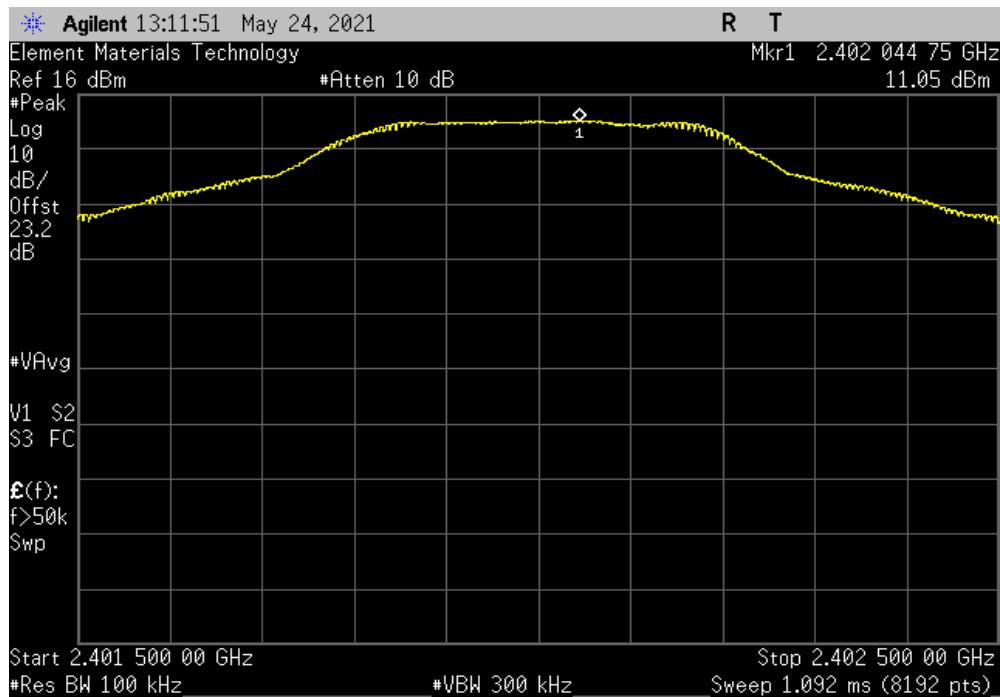

| DH5, GFSK, Low Channel, 2402 MHz | | | | | |
|----------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4804.3 | -49.33 | -20 | Pass | |

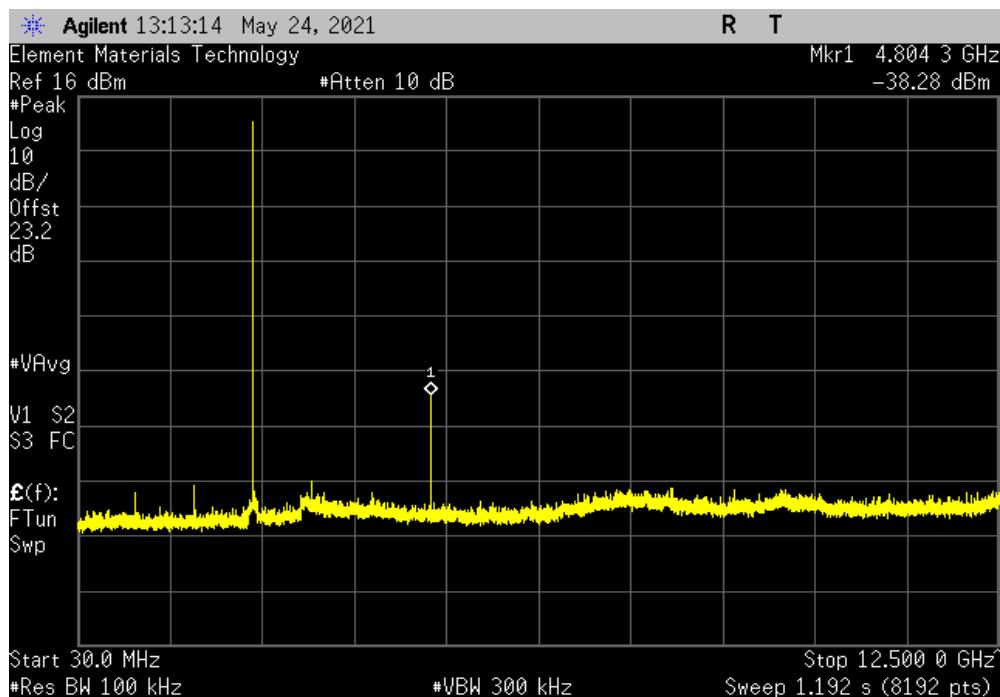


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Low Channel, 2402 MHz | | | | | |
|----------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24789.4 | -62.75 | -20 | Pass | |

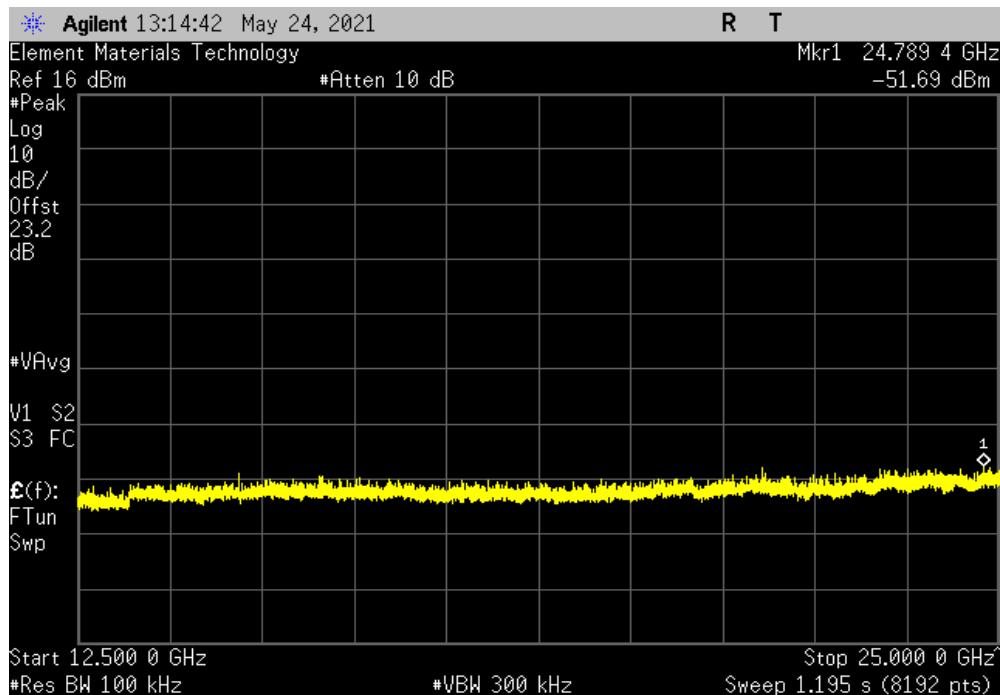

| DH5, GFSK, Mid Channel, 2441 MHz | | | | | |
|----------------------------------|---------------------|-----------------|---------------|--------|-----|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2441.05 | N/A | N/A | N/A | N/A |

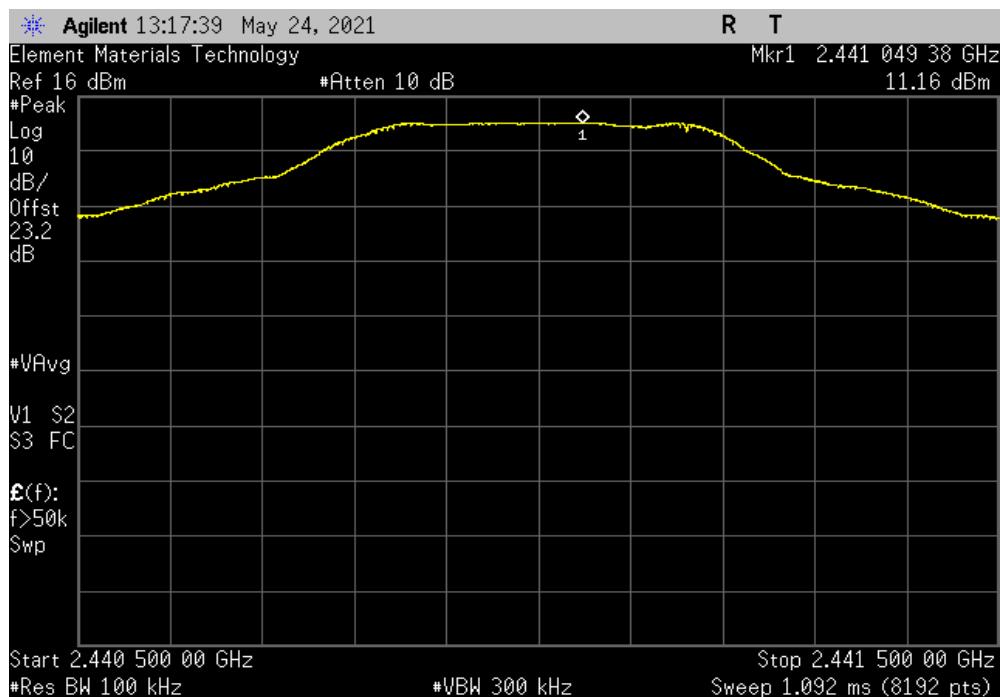


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, Mid Channel, 2441 MHz | | | | | |
|----------------------------------|---------------------|-----------------|--------------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4881.9 | -47.27 | -20 | Pass | |

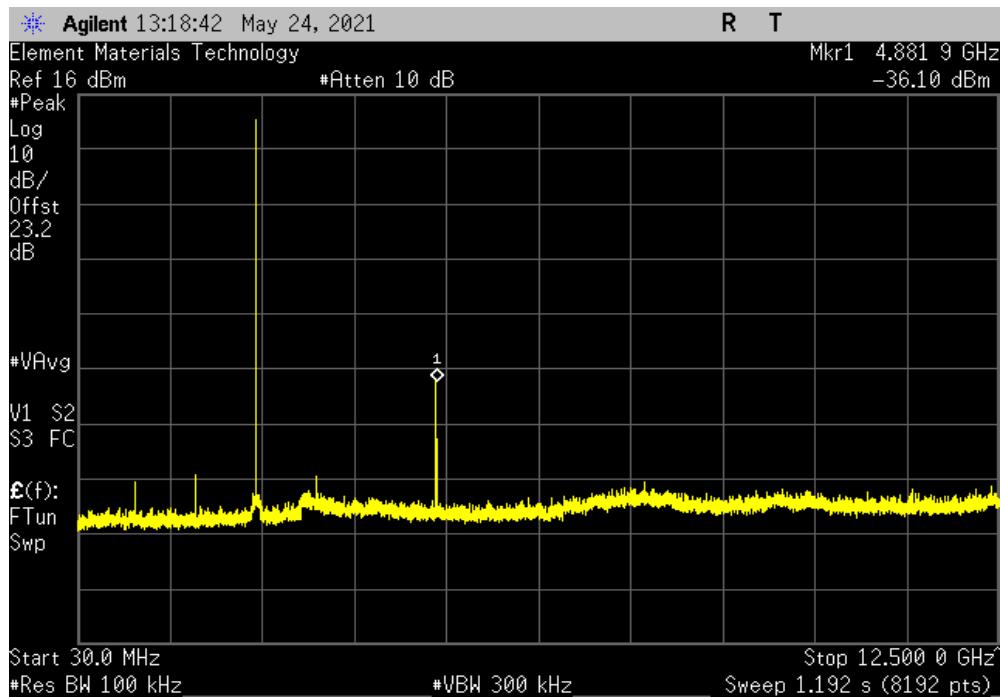

| DH5, GFSK, Mid Channel, 2441 MHz | | | | | |
|----------------------------------|---------------------|-----------------|--------------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24339.2 | -63.05 | -20 | Pass | |

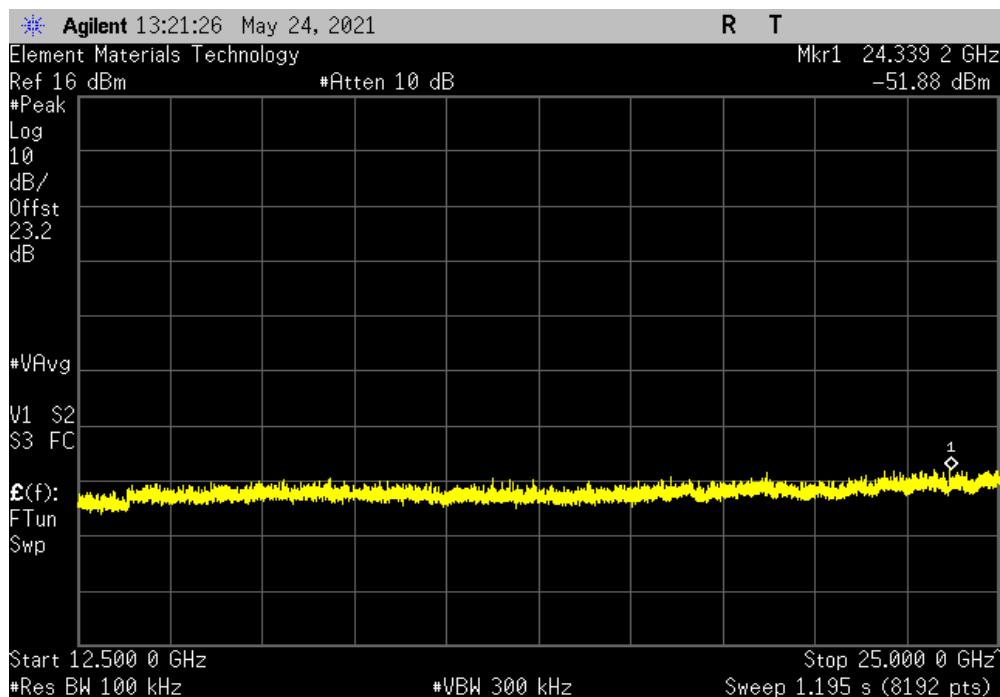


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, High Channel, 2480 MHz | | | | | |
|-----------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2480.05 | N/A | N/A | N/A | |

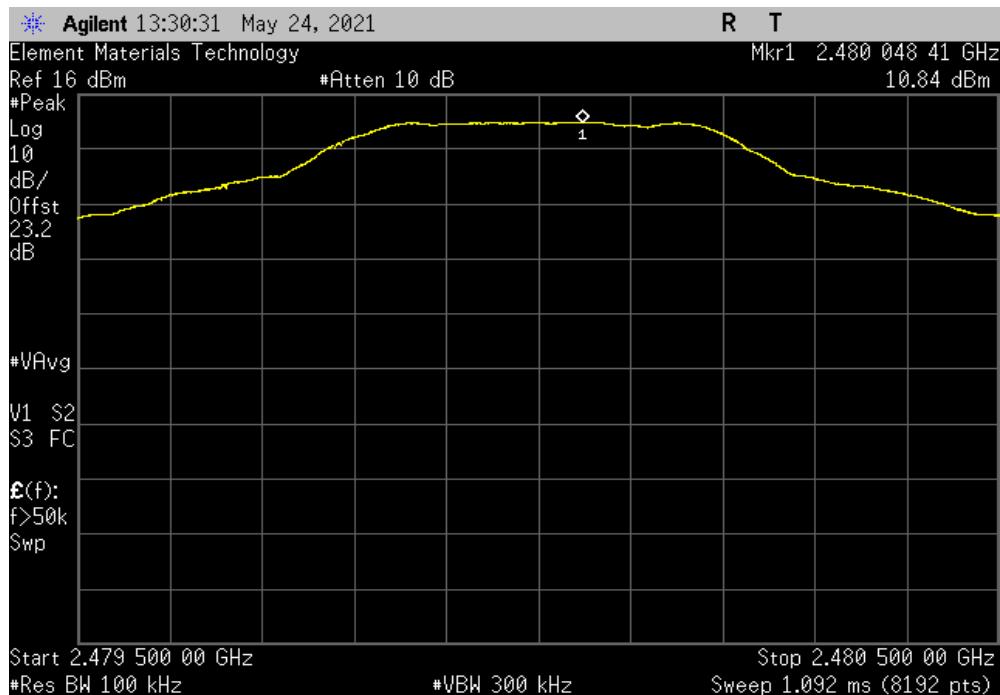

| DH5, GFSK, High Channel, 2480 MHz | | | | | |
|-----------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4961.1 | -46.9 | -20 | Pass | |

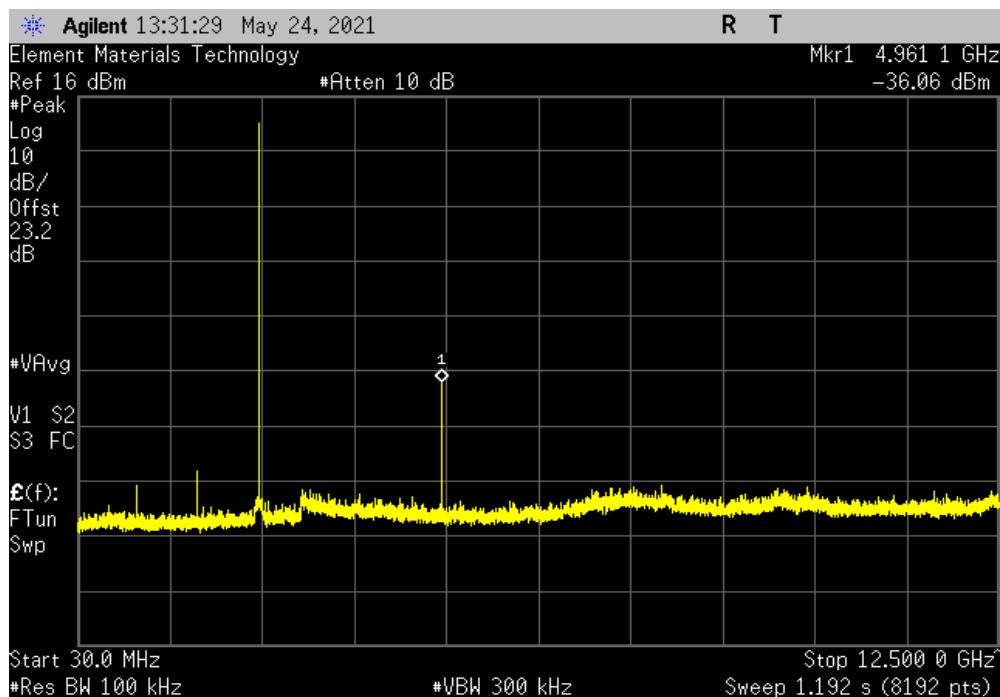


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| DH5, GFSK, High Channel, 2480 MHz | | | | | |
|-----------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24502.5 | -62.45 | -20 | Pass | |

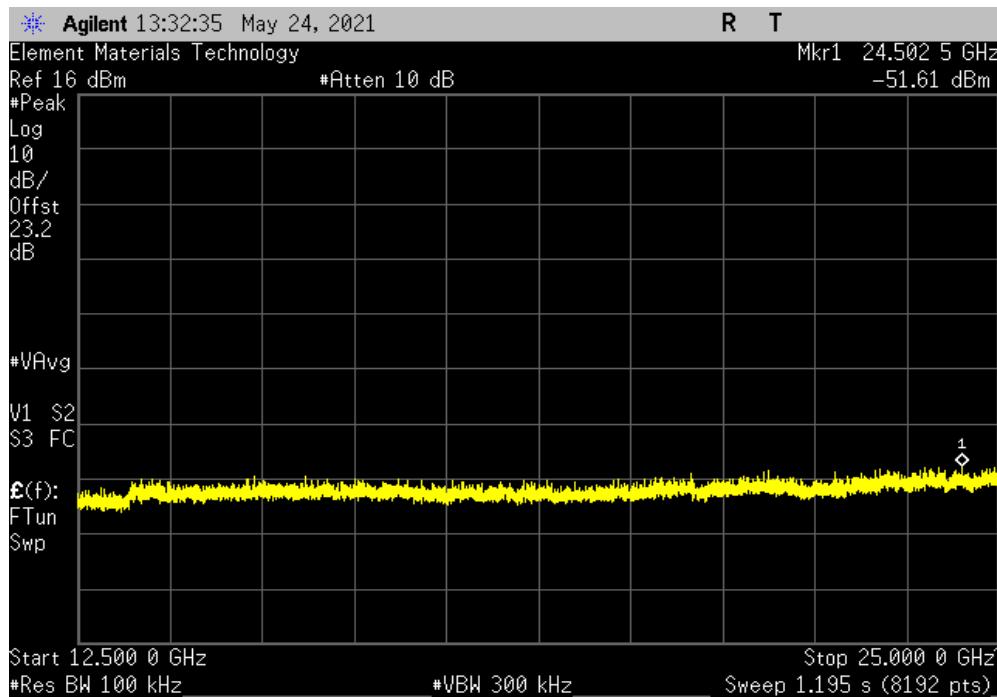

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|-----|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2402.03 | N/A | N/A | N/A | N/A |

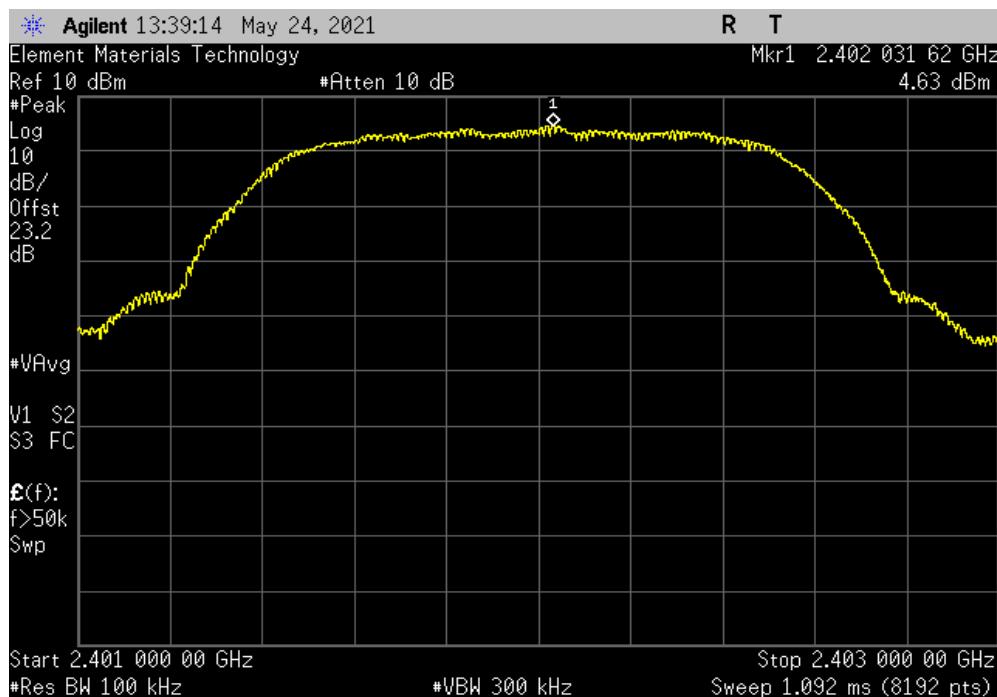


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | |
|---|---------------------|-----------------|--------------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result |
| 30 MHz - 12.5 GHz | 4804.3 | -55.01 | -20 | Pass |

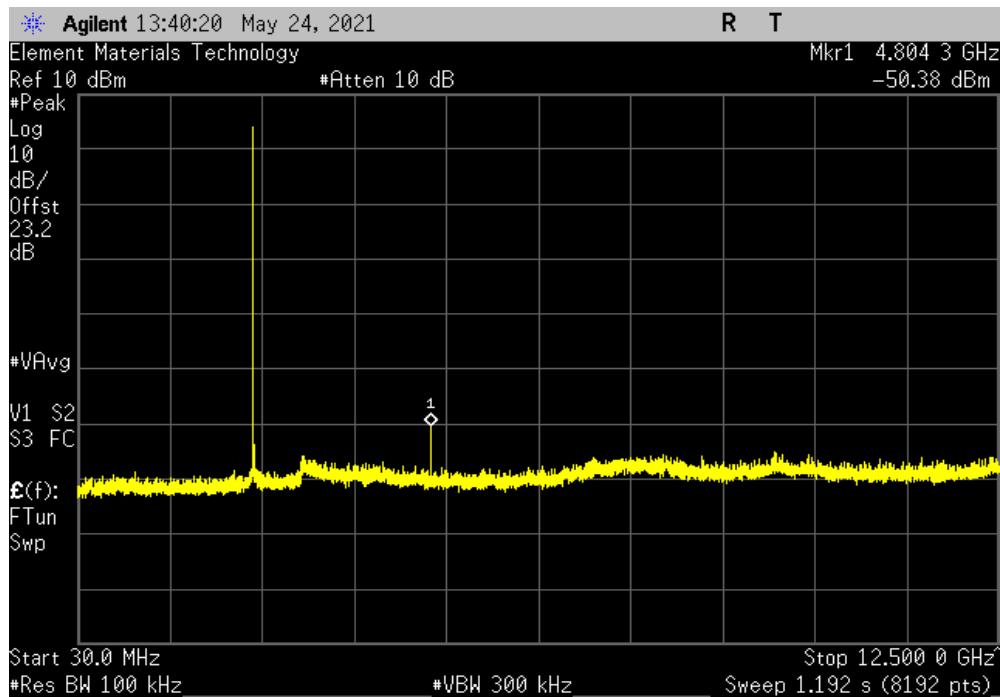

| 2DH5, pi/4-DQPSK, Low Channel, 2402 MHz | | | | |
|---|---------------------|-----------------|--------------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result |
| 12.5 GHz - 25 GHz | 23469.4 | -56.09 | -20 | Pass |

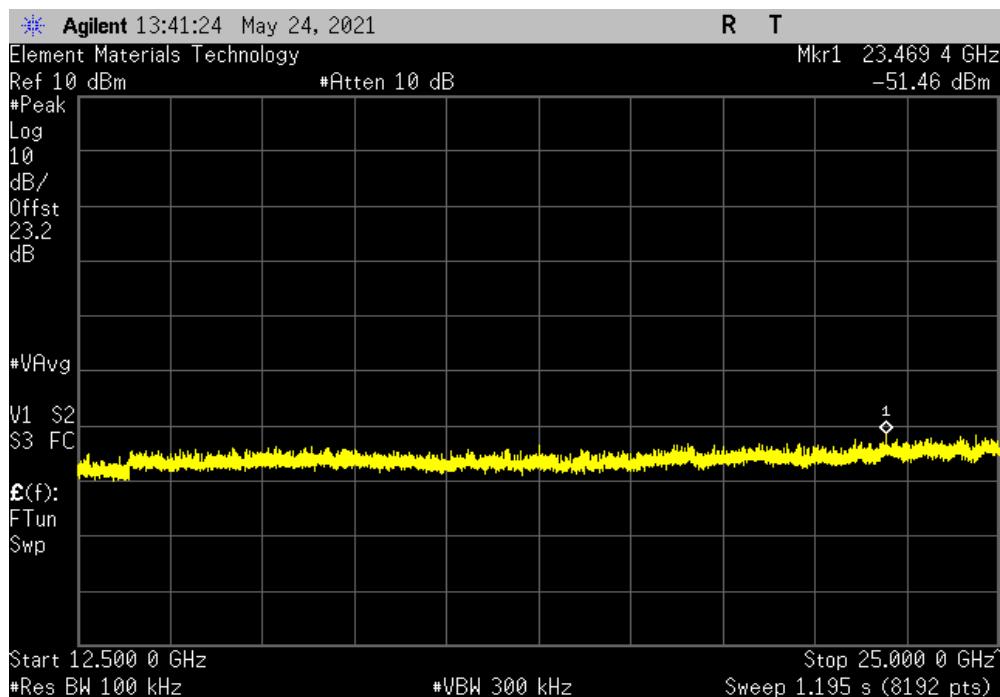


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2441.03 | N/A | N/A | N/A | |

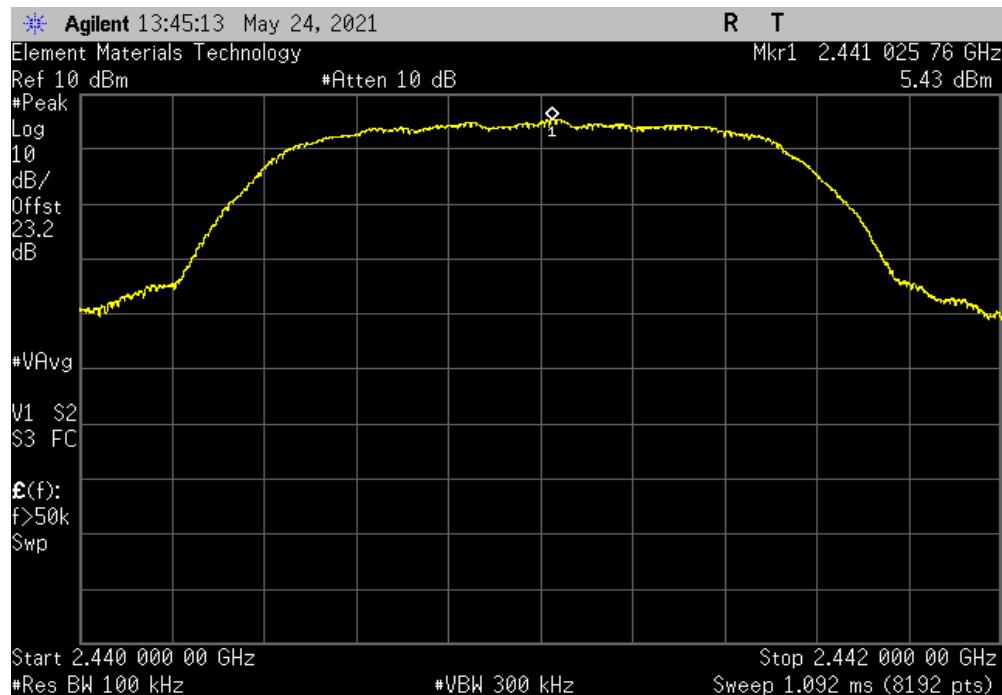

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4881.9 | -52.51 | -20 | Pass | |

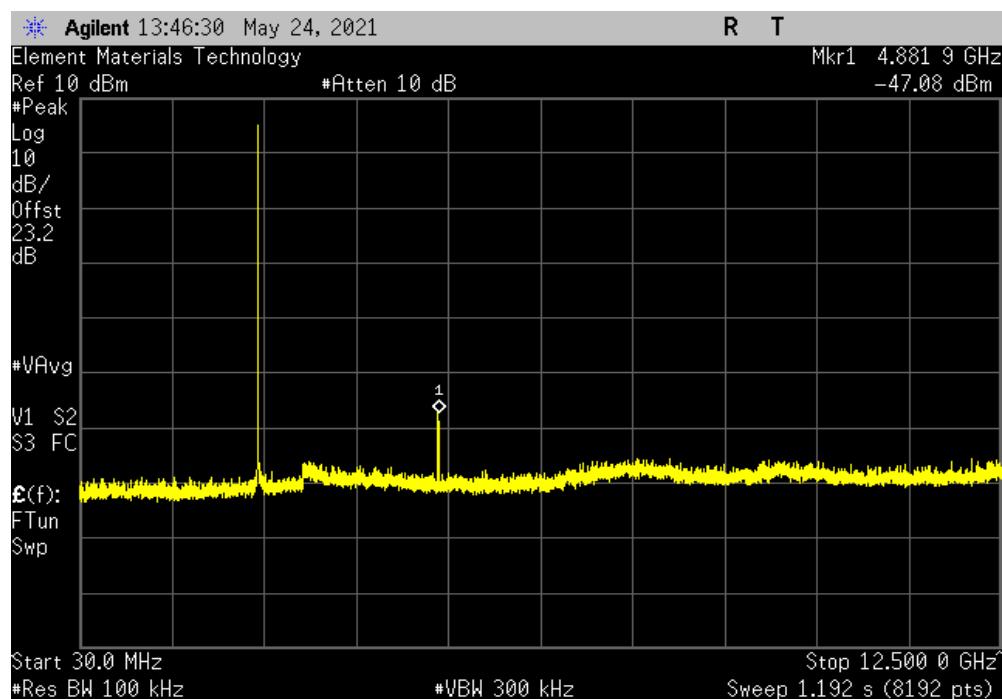


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, Mid Channel, 2441 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24824.5 | -56.5 | -20 | Pass | |

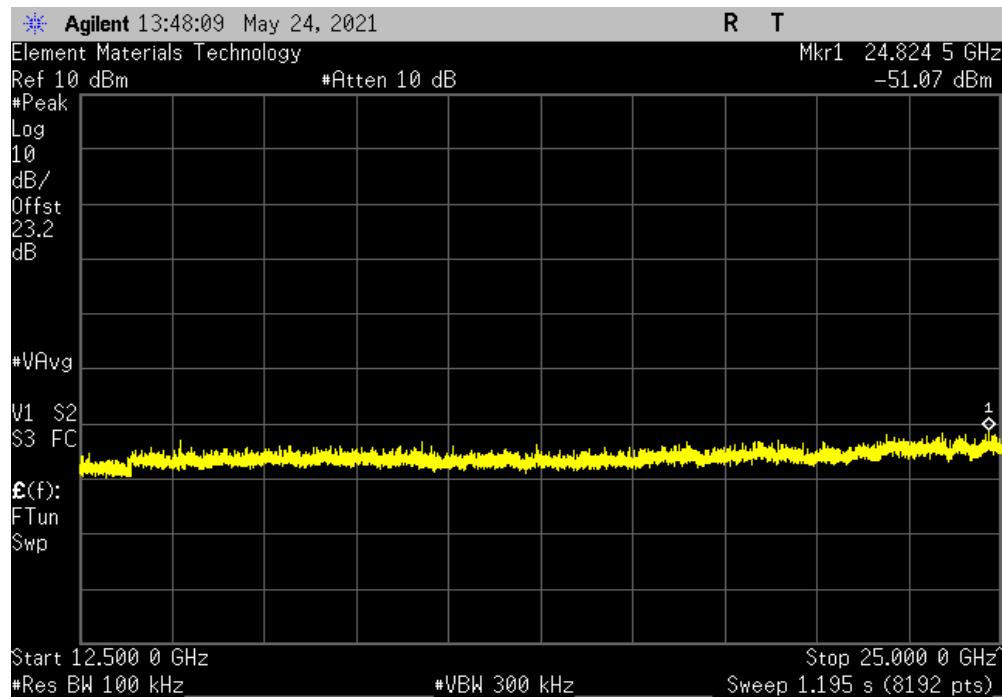

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | | | |
|--|---------------------|-----------------|---------------|--------|-----|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2480.03 | N/A | N/A | N/A | N/A |

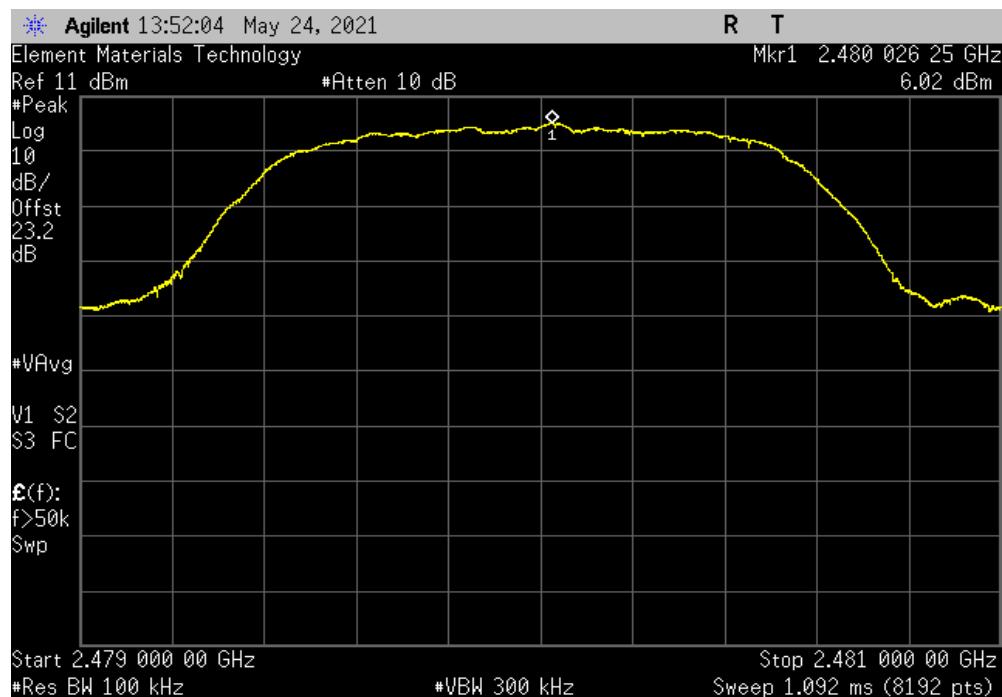


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | | |
|--|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 30 MHz - 12.5 GHz | 4959.5 | -50.4 | -20 | Pass |

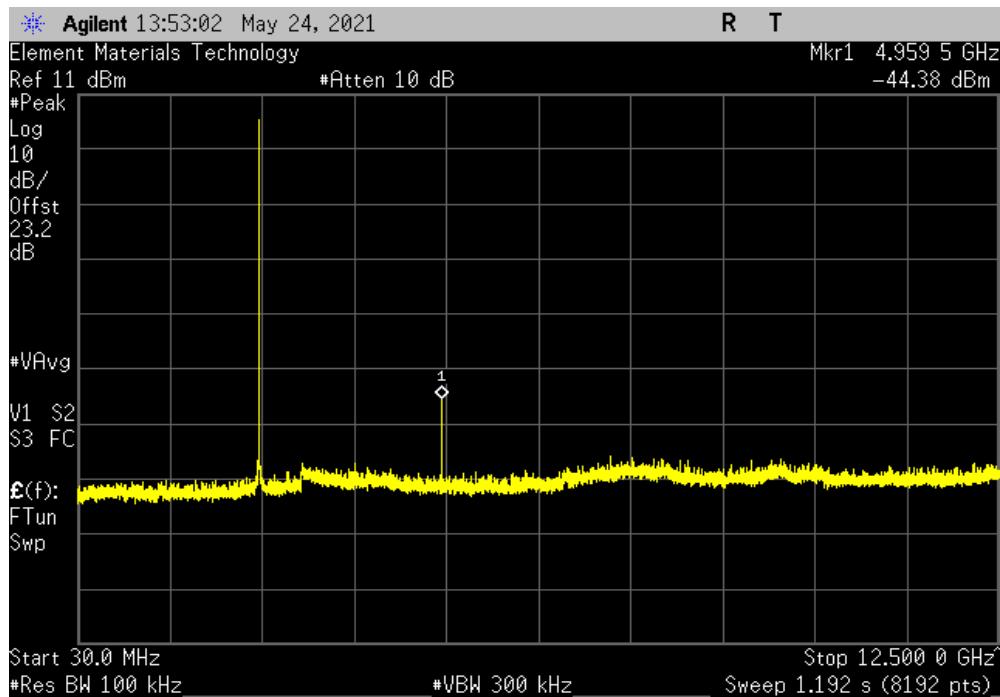

| 2DH5, pi/4-DQPSK, High Channel, 2480 MHz | | | | |
|--|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | 24890.1 | -56.3 | -20 | Pass |

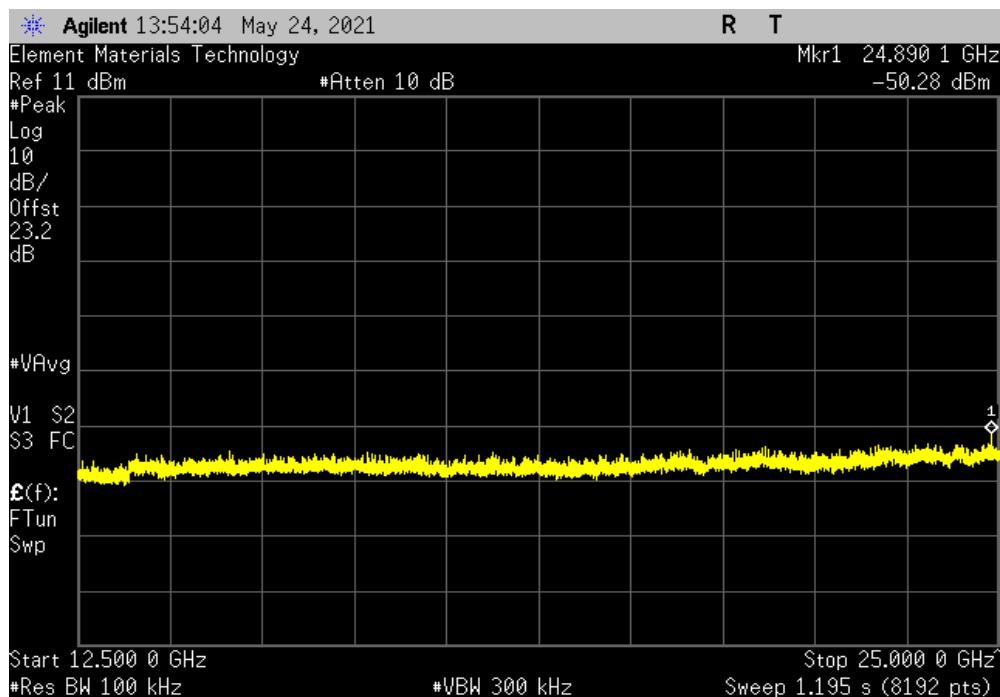


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | | | | |
|-------------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2402.09 | N/A | N/A | N/A | |

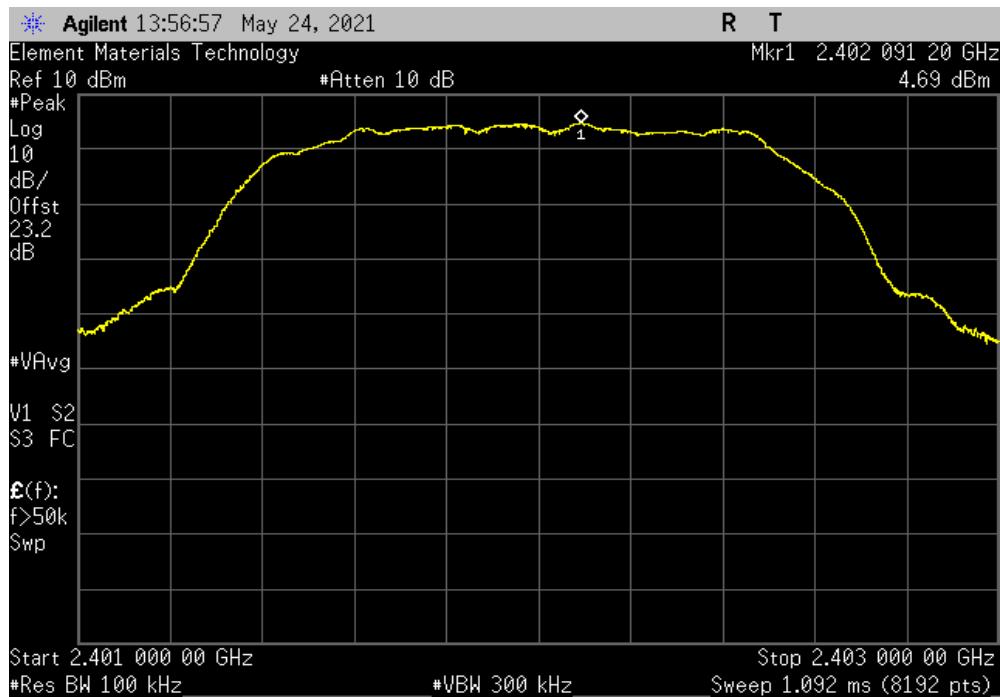

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | | | | |
|-------------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4804.3 | -55.1 | -20 | Pass | |

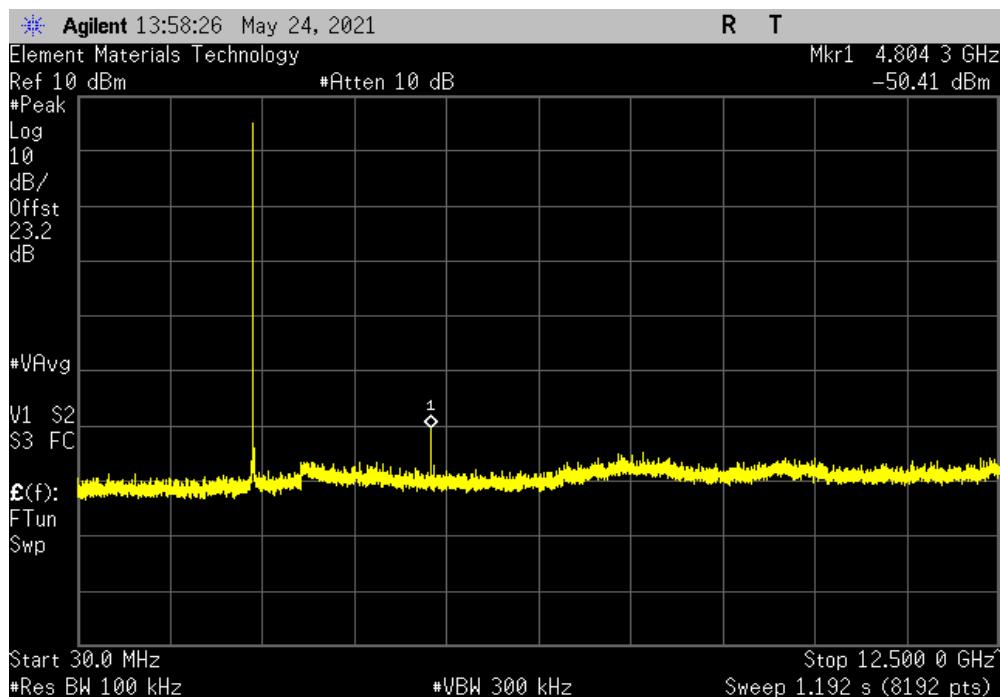


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Low Channel, 2402 MHz | | | | | |
|-------------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24845.9 | -56.29 | -20 | Pass | |

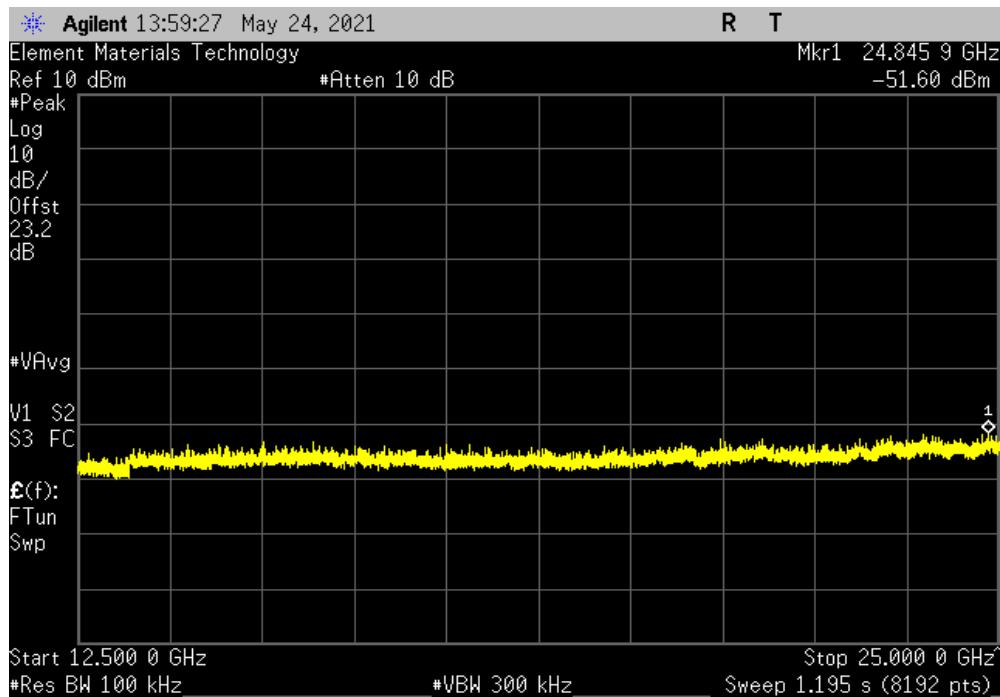

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | | |
|-------------------------------------|---------------------|-----------------|---------------|--------|-----|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2441.1 | N/A | N/A | N/A | N/A |

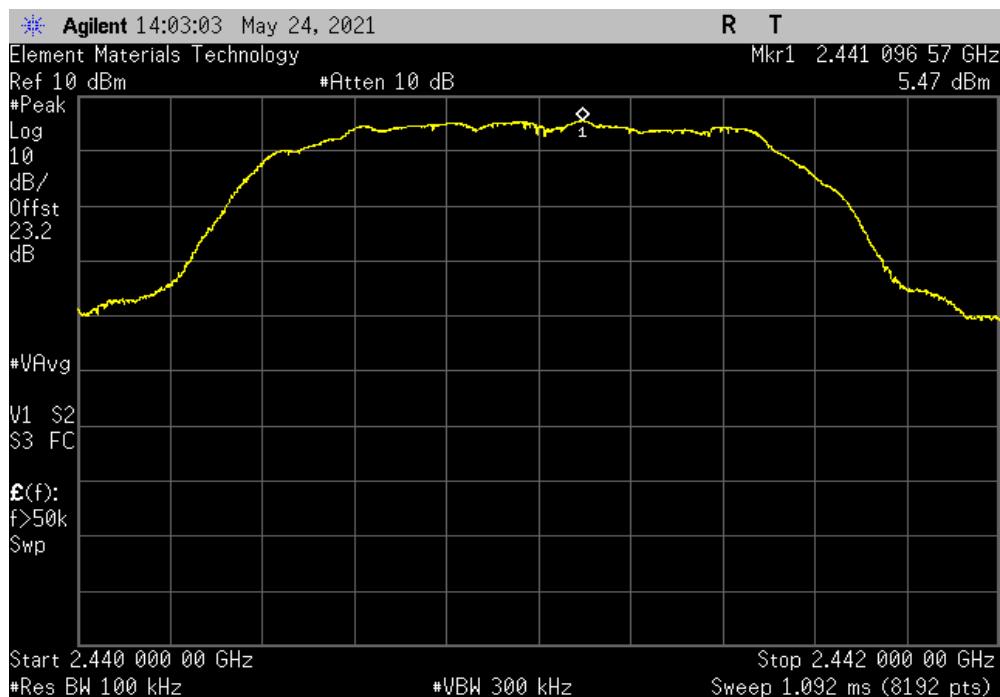


SPURIOUS CONDUCTED EMISSIONS




TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | |
|-------------------------------------|---------------------|-----------------|--------------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result |
| 30 MHz - 12.5 GHz | 4881.9 | -52.34 | -20 | Pass |

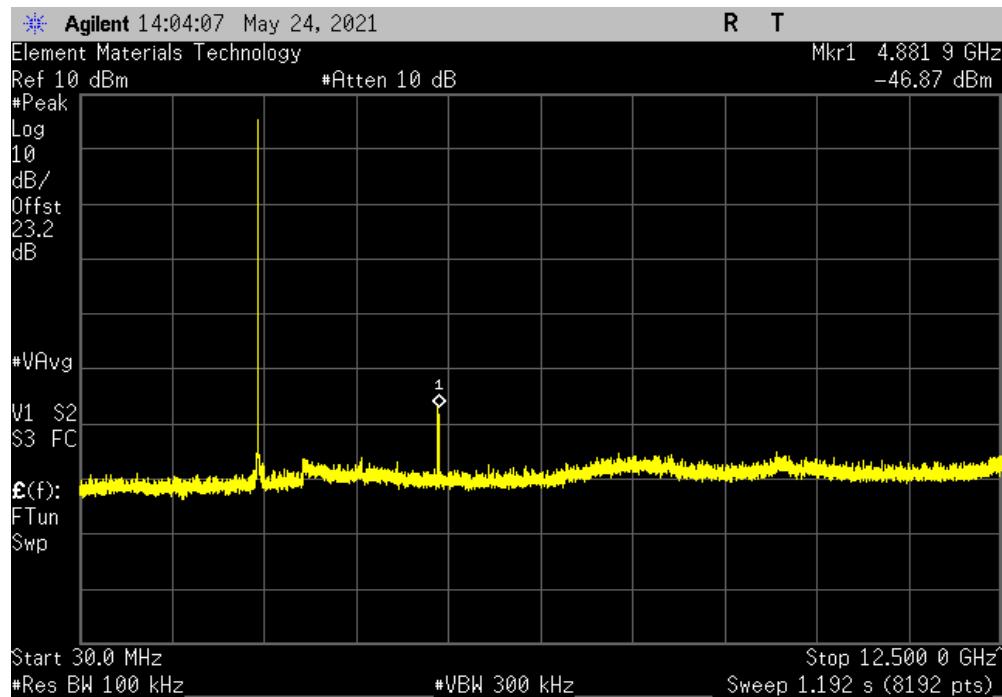

| 3DH5, 8-DPSK, Mid Channel, 2441 MHz | | | | |
|-------------------------------------|---------------------|-----------------|--------------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit \leq (dBc) | Result |
| 12.5 GHz - 25 GHz | 24879.4 | -56.2 | -20 | Pass |

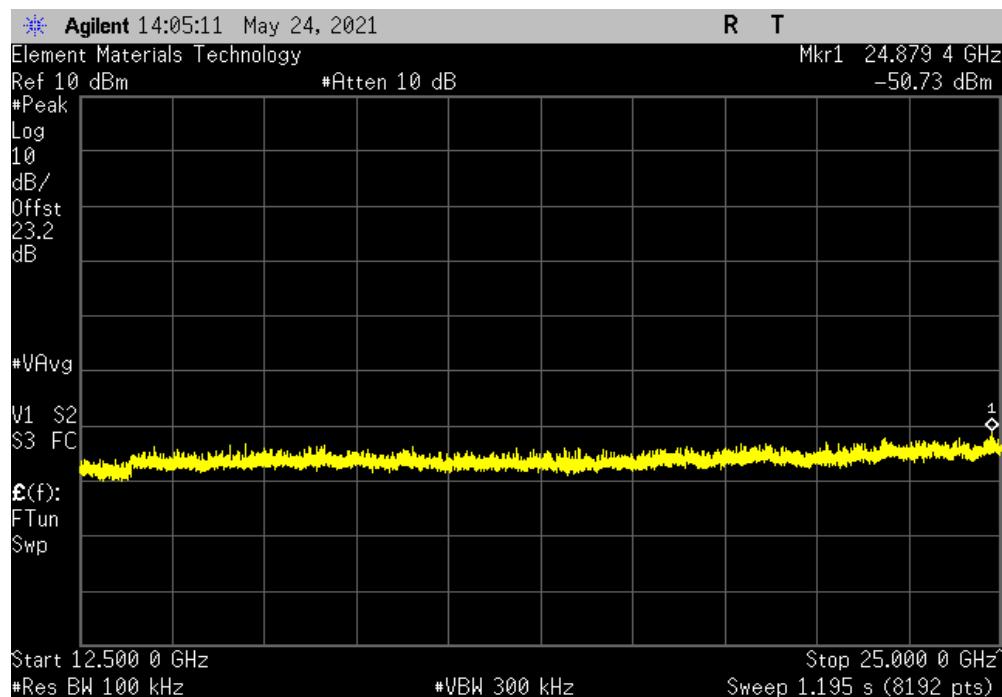


SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | | | |
|--------------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2480.09 | N/A | N/A | N/A | |

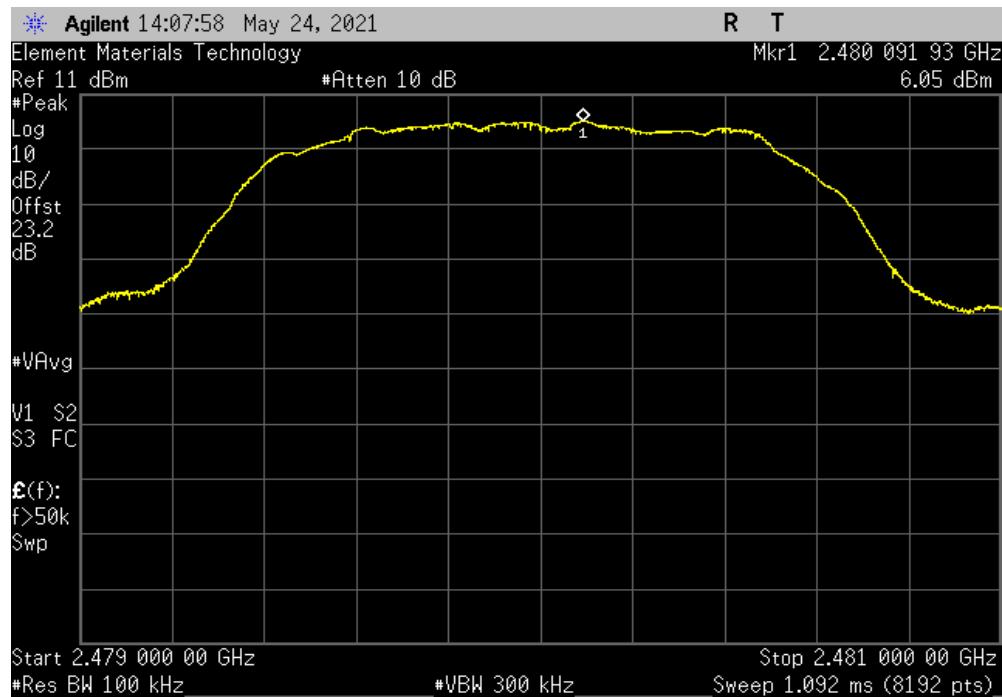

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | | | |
|--------------------------------------|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 4959.5 | -49.54 | -20 | Pass | |

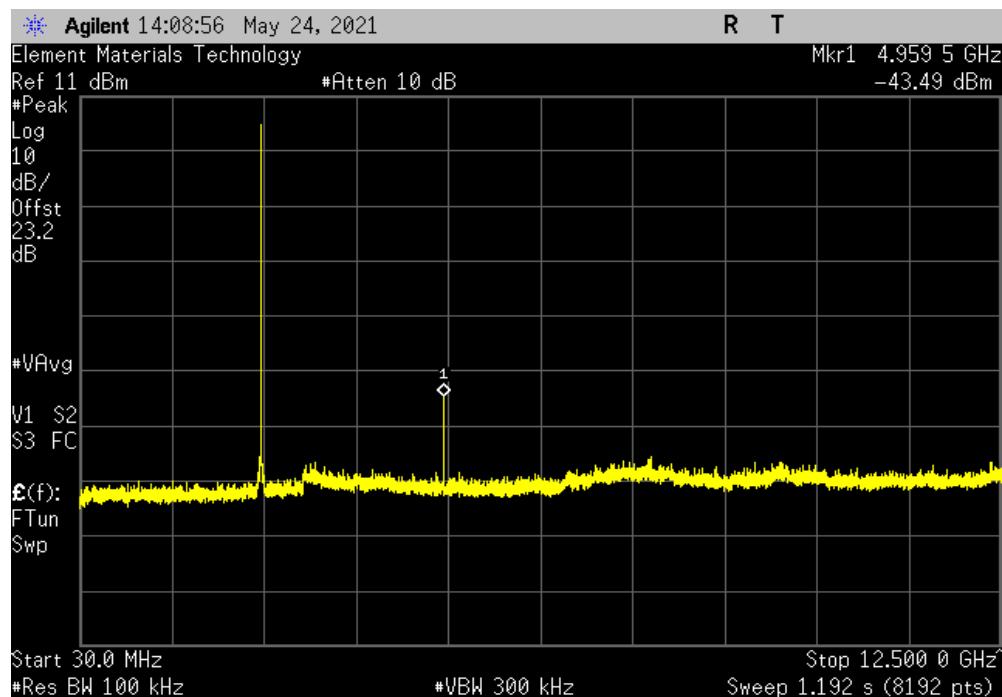


SPURIOUS CONDUCTED EMISSIONS



TbtTx 2021.03.19.1 XMit 2020.12.30.0

| 3DH5, 8-DPSK, High Channel, 2480 MHz | | | | |
|--------------------------------------|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | 23486.1 | -57.54 | -20 | Pass |

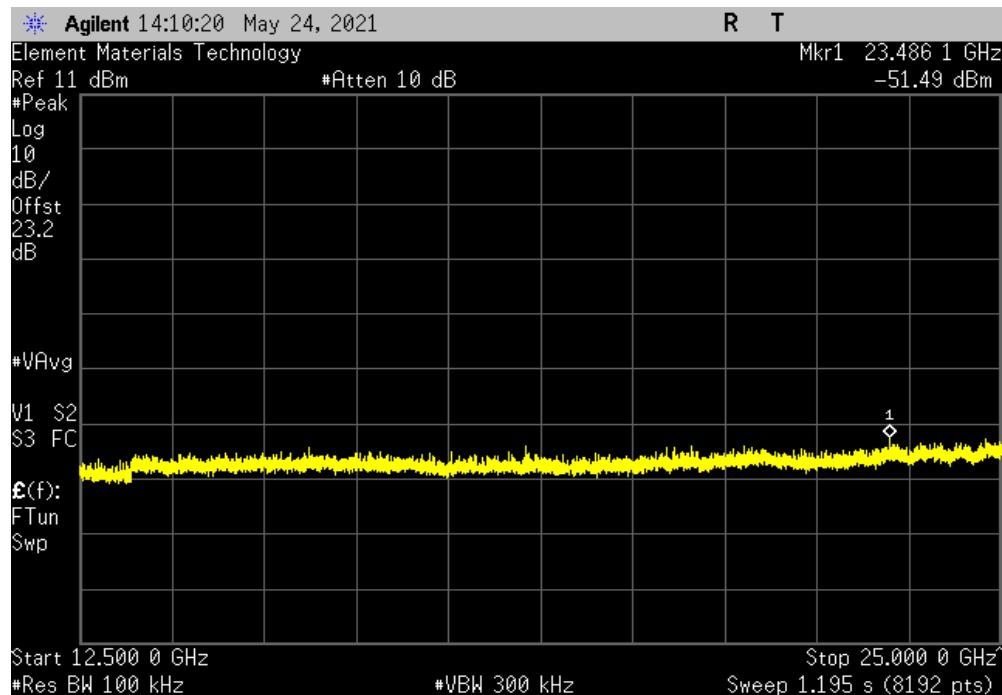



End of Test Report