


### Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel 38



(802.11 AC20) 26dB&99%Bandwidth plot on channel 36

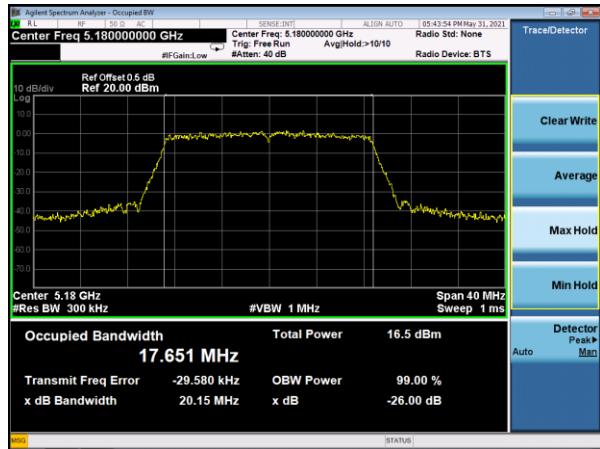


(802.11 n40) 26dB&99%Bandwidth plot on channel 46

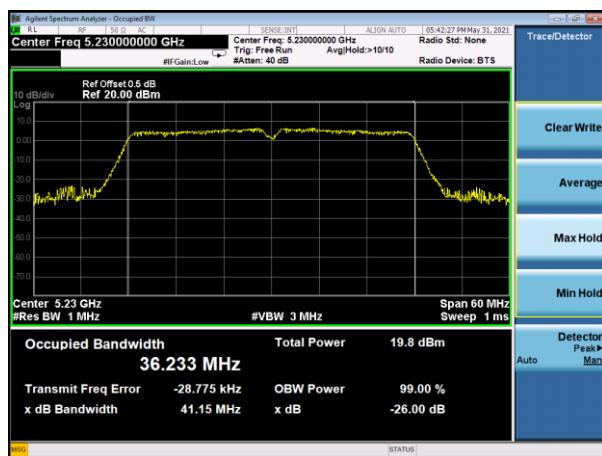

(802.11 AC20) 26dB&99%Bandwidth plot on channel 40



(802.11 AC20) 26dB&99%Bandwidth plot on channel 40

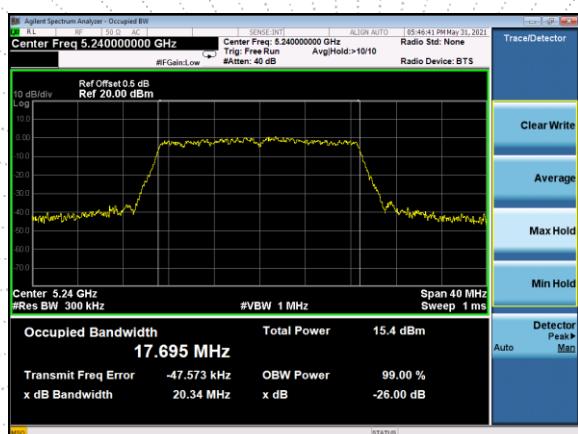

### Test plot

(802.11 AC40) 26dB&99%Bandwidth plot on channel 38    (802.11 AC80) 26dB&99%Bandwidth plot on channel 42



(802.11 AC40) 26dB&99%Bandwidth plot on channel 46



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH149	5745	16.753	16.04	≥500	Pass
	CH157	5785	16.749	15.45	≥500	Pass
	CH165	5825	16.771	16.32	≥500	Pass
802.11 n20	CH149	5745	17.689	16.91	≥500	Pass
	CH157	5785	17.693	16.89	≥500	Pass
	CH165	5825	17.682	17.52	≥500	Pass
802.11 n40	CH151	5755	36.151	35.02	≥500	Pass
	CH159	5795	36.109	35.12	≥500	Pass
802.11 ac20	CH149	5745	17.705	17.58	≥500	Pass
	CH157	5785	17.721	14.67	≥500	Pass
	CH165	5825	17.693	17.00	≥500	Pass
802.11 ac40	CH151	5755	36.183	35.13	≥500	Pass
	CH159	5795	36.136	34.01	≥500	Pass
802.11 AC80	CH155	5775	75.038	75.17	≥500	Pass

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH149	5745	16.760	16.32	≥500	Pass
	CH157	5785	16.704	15.52	≥500	Pass
	CH165	5825	16.746	16.35	≥500	Pass
802.11 n20	CH149	5745	17.708	17.57	≥500	Pass
	CH157	5785	17.677	16.97	≥500	Pass
	CH165	5825	17.672	16.64	≥500	Pass
802.11 n40	CH151	5755	36.211	35.06	≥500	Pass
	CH159	5795	36.188	35.16	≥500	Pass
802.11 ac20	CH149	5745	17.672	16.38	≥500	Pass
	CH157	5785	17.694	17.58	≥500	Pass
	CH165	5825	17.636	16.09	≥500	Pass
802.11 ac40	CH151	5755	35.163	35.19	≥500	Pass
	CH159	5795	36.151	35.17	≥500	Pass
802.11 AC80	CH155	5775	75.048	75.16	≥500	Pass

Antenna A: 5725-5850MHz

Mode:	802.11a
5745MHz 6dB bandwidth	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 5.745000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Span 40 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.441 MHz</p> <p>Total Power 20.1 dBm</p> <p>Transmit Freq Error -73.988 kHz</p> <p>x dB Bandwidth 16.04 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB 16.04 MHz</p> <p>Detector Auto Peak Man</p>
5745MHz 99% bandwidth	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 5.745000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Span 40 MHz</p> <p>#Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 16.753 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error -91.162 kHz</p> <p>x dB Bandwidth 20.13 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -26.00 dB</p> <p>Detector Auto Peak Man</p>

5785MHz  
6dB bandwidth

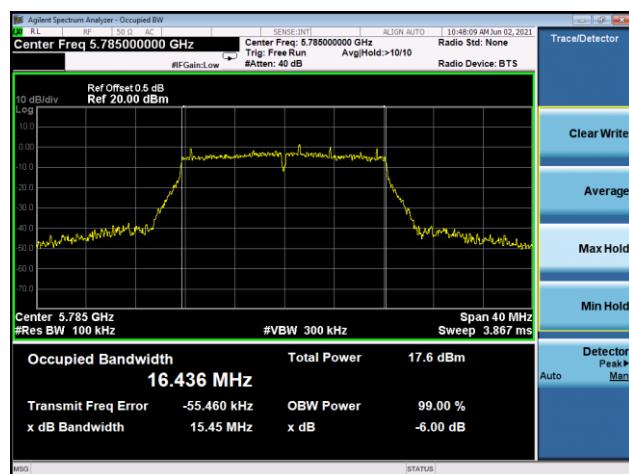

5785MHz  
99% bandwidth



5825MHz  
6dB bandwidth




5825MHz  
99% bandwidth




**Mode:**
**802.11n-HT20**


5745MHz  
6dB bandwidth

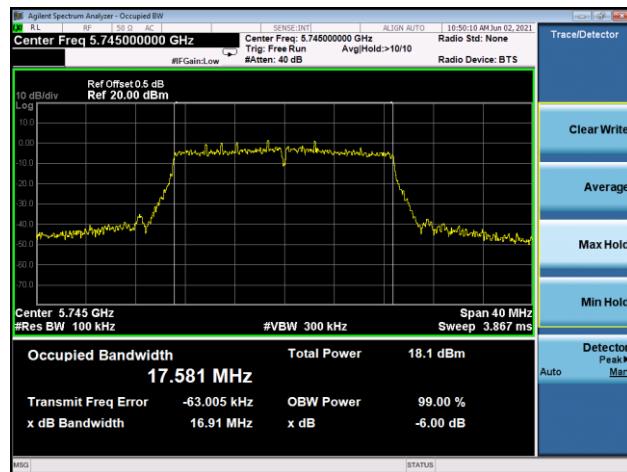


5745MHz  
99% bandwidth

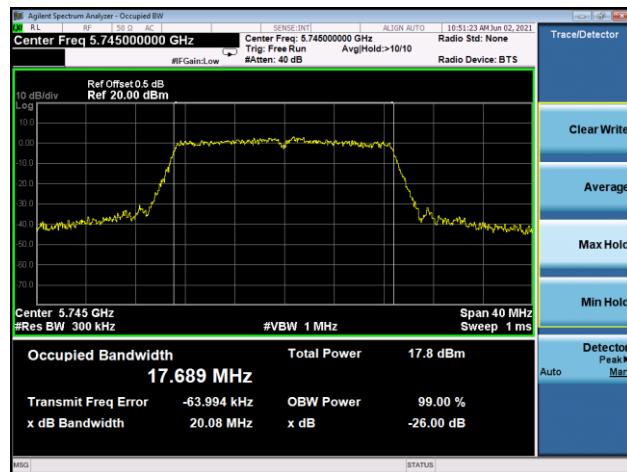

5785MHz  
6dB bandwidth

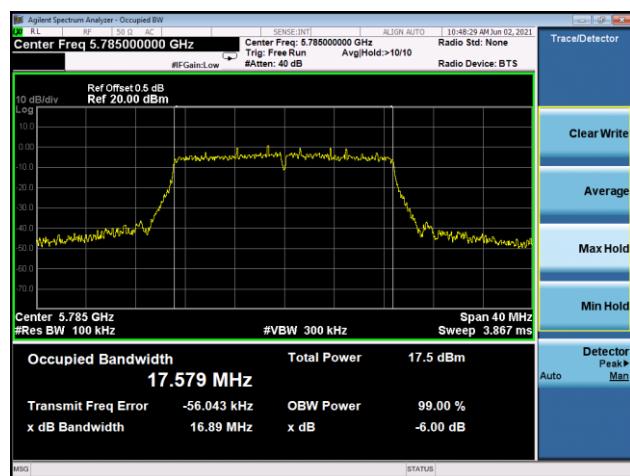


5785MHz  
99% bandwidth

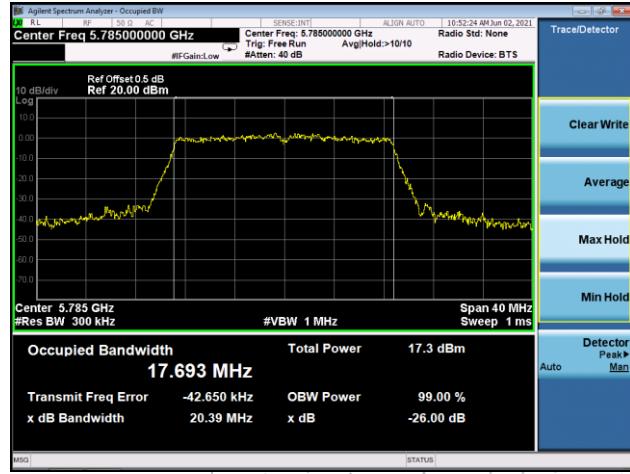

5825MHz  
6dB bandwidth




5825MHz  
99% bandwidth

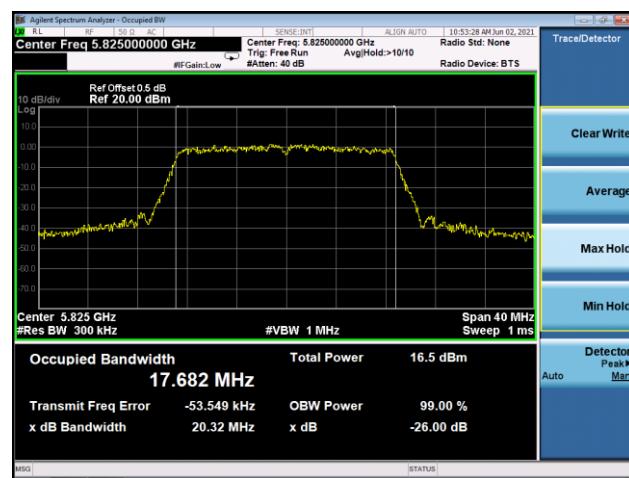


**Mode:**
**802.11n-HT40**


5755 MHz  
6dB bandwidth

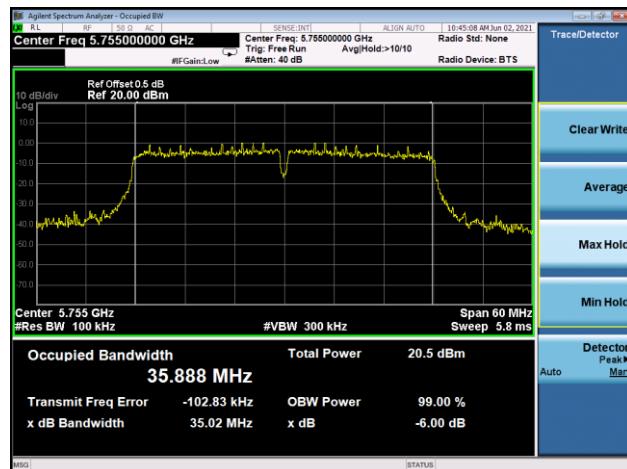


5755 MHz  
99% bandwidth

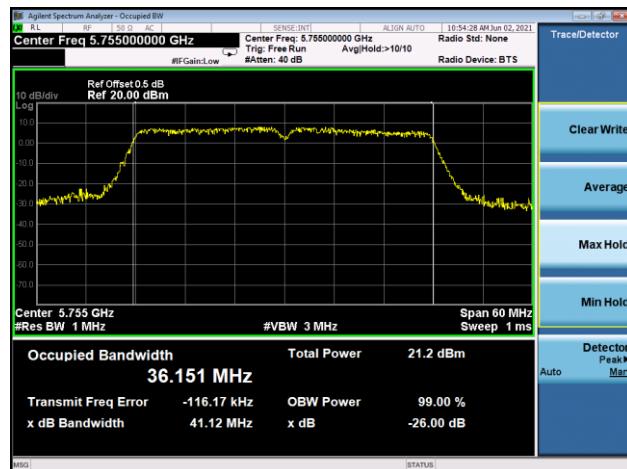

5795 MHz  
6dB bandwidth

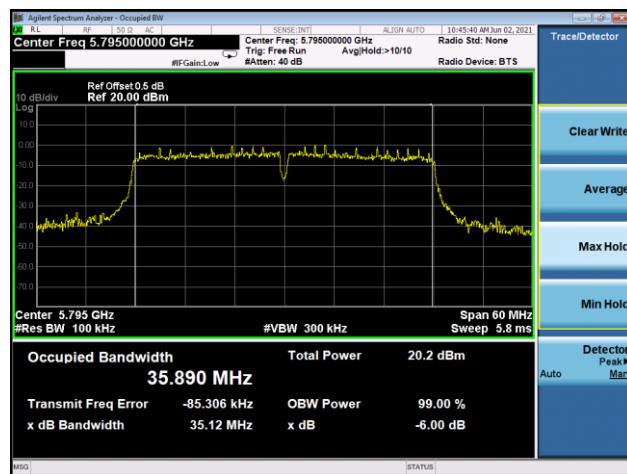


5795 MHz  
99% bandwidth

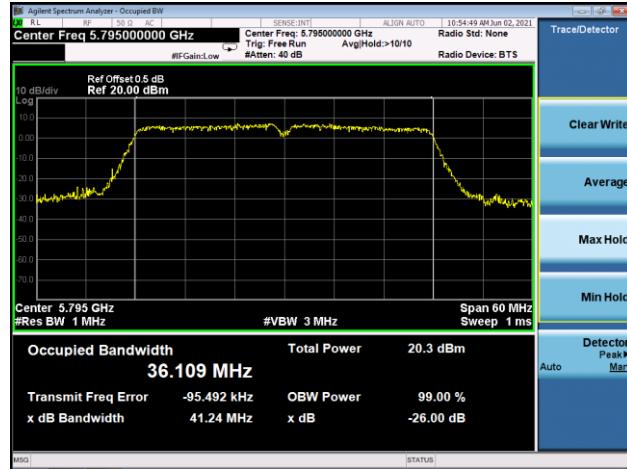


Mode:

802.11ac-HT20


5745MHz  
6dB bandwidth

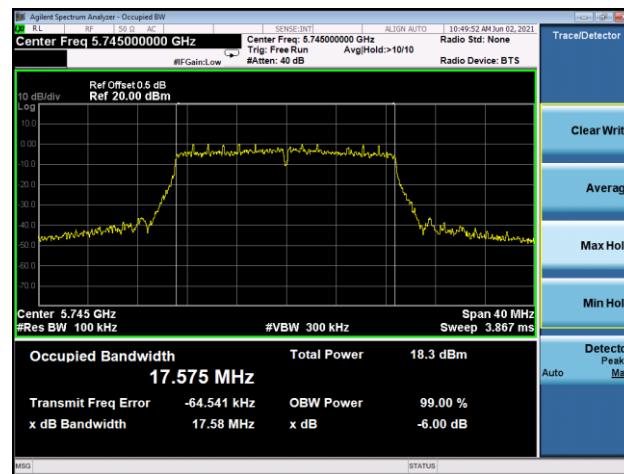


5745MHz  
99% bandwidth

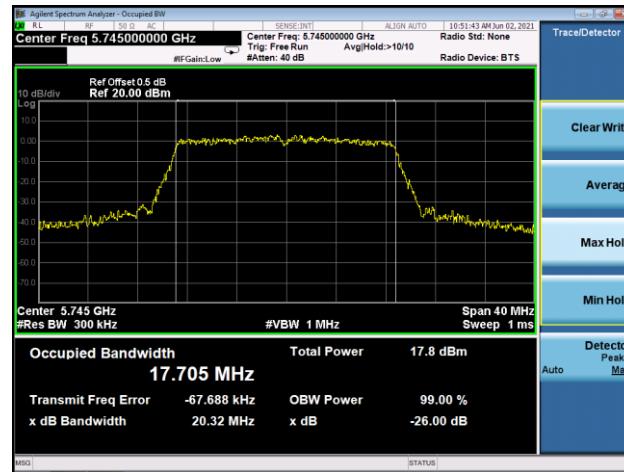

5785MHz  
6dB bandwidth

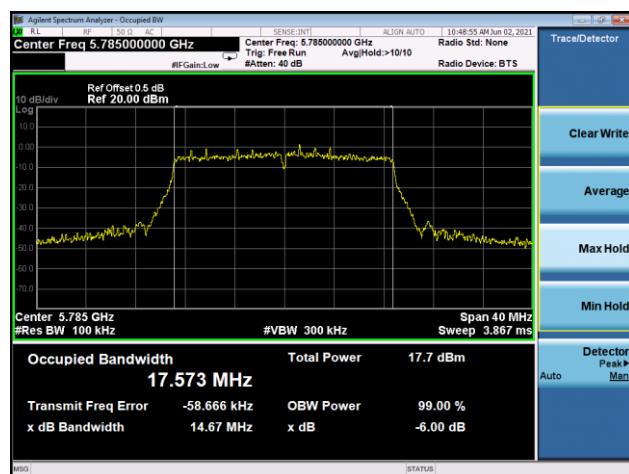


5785MHz  
99% bandwidth

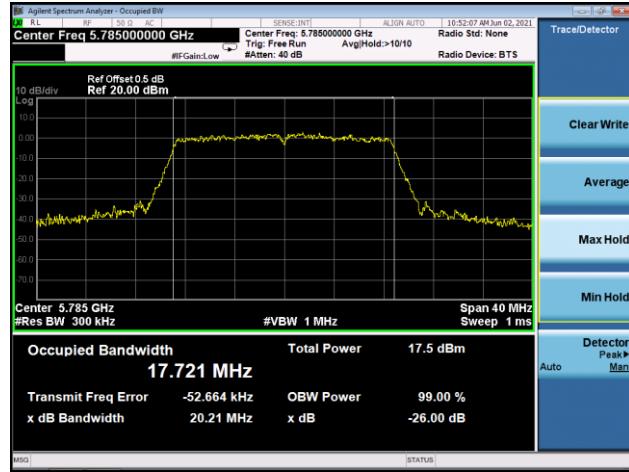

5825MHz  
6dB bandwidth




5825MHz  
99% bandwidth

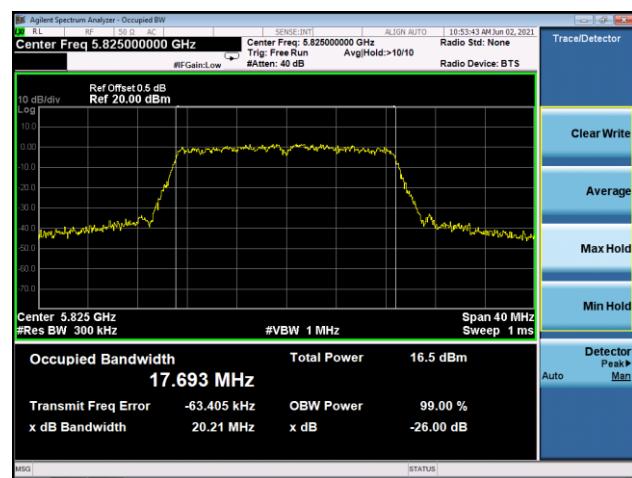


Mode:

802.11ac-HT40


5755 MHz  
6dB bandwidth

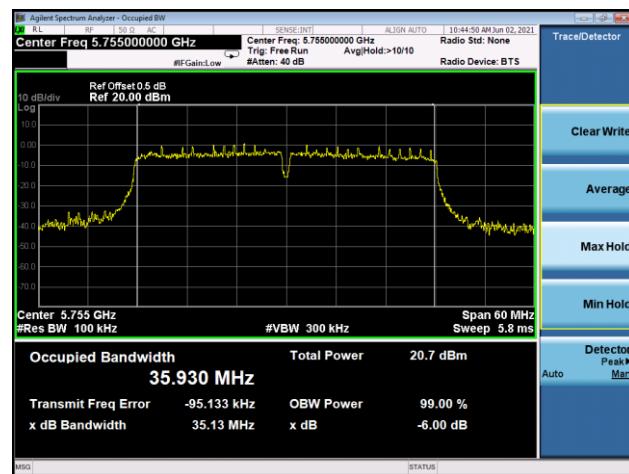


5755 MHz  
99% bandwidth

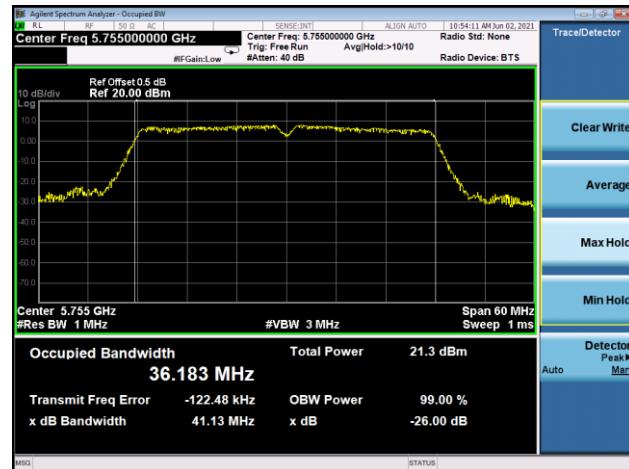

5795 MHz  
6dB bandwidth

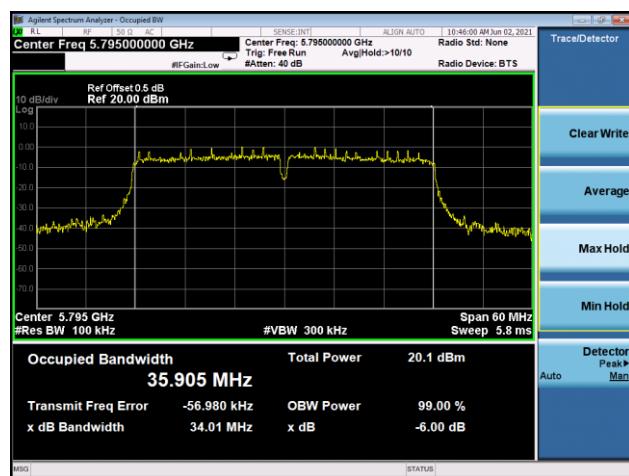


5795 MHz  
99% bandwidth

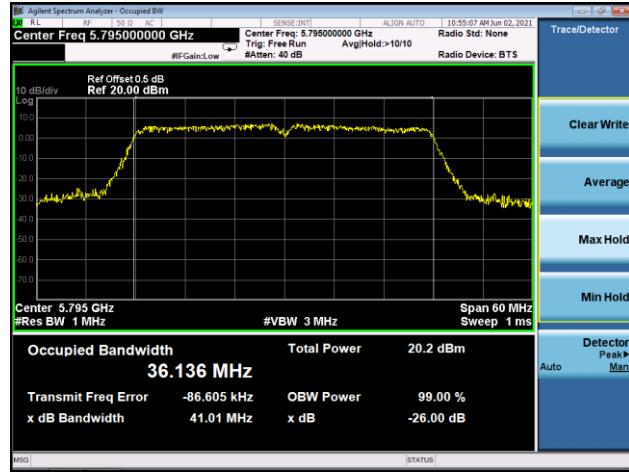

Mode:

802.11ac-HT80

5775 MHz  
6dB bandwidth

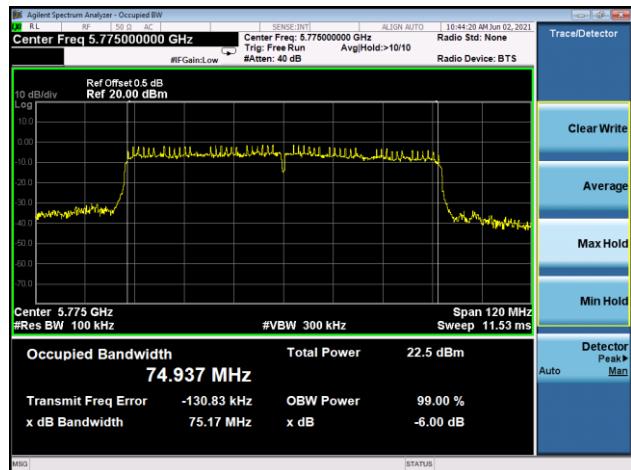

5775 MHz  
99% bandwidth



## 10. MAXIMUM CONDUCTED OUTPUT POWER

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

### 10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth-dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).

• Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration  $T$  of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq$  3 MHz.

(iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

## 10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (AV)			LIMIT	Result
		ANT A(dBm)	ANT B(dBm)	Total(dBm)		
<b>TX 802.11a Mode</b>						
CH36	5180	16.576	14.218	/	30	Pass
CH40	5200	16.236	14.788	/	30	Pass
CH48	5240	15.136	13.440	/	30	Pass
<b>TX 802.11 n20M Mode</b>						
CH36	5180	15.727	13.527	17.775	30	Pass
CH40	5200	15.648	13.502	17.717	30	Pass
CH48	5240	15.002	13.103	17.166	30	Pass
<b>TX 802.11 n40M Mode</b>						
CH38	5190	14.595	12.398	16.644	30	Pass
CH46	5230	14.328	12.545	16.538	30	Pass
<b>TX 802.11 AC20M Mode</b>						
CH36	5180	15.847	13.729	17.926	30	Pass
CH40	5200	15.972	13.496	17.918	30	Pass
CH48	5240	15.264	13.129	17.337	30	Pass
<b>TX 802.11 AC40M Mode</b>						
CH38	5190	14.791	12.782	16.912	30	Pass
CH46	5230	14.149	12.152	16.275	30	Pass
<b>TX 802.11 AC80M Mode</b>						
CH42	5210	13.529	11.086	15.487	30	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (AV)			LIMIT	Result
		ANT A(dBm)	ANT B(dBm)	Total(dBm)		
<b>TX 802.11a Mode</b>						
CH 149	5745	16.061	15.514	/	30	Pass
CH 157	5785	16.068	14.218	/	30	Pass
CH 165	5825	15.831	14.764	/	30	Pass
<b>TX 802.11 n20M Mode</b>						
CH 149	5745	14.896	14.725	17.822	30	Pass
CH 157	5785	14.317	13.824	17.088	30	Pass
CH 165	5825	13.834	13.568	16.713	30	Pass
<b>TX 802.11 n40M Mode</b>						
CH 151	5755	14.003	13.625	16.828	30	Pass
CH 159	5795	14.269	12.879	16.640	30	Pass
<b>TX 802.11 AC20M Mode</b>						
CH 149	5745	15.087	14.632	17.876	30	Pass
CH 157	5785	14.364	14.005	17.199	30	Pass
CH 165	5825	13.857	13.781	16.829	30	Pass
<b>TX 802.11 AC40M Mode</b>						
CH 151	5755	14.269	13.189	16.773	30	Pass
CH 159	5795	14.126	12.745	16.500	30	Pass
<b>TX 802.11 AC80M Mode</b>						
CH 155	5775	13.029	12.115	15.606	30	Pass

## 11. OUT OF BAND EMISSIONS

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

## 11.5 Test Result


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B,only shown Antenna B Plot. Antenna B: 5180-5240MHz


5.1G

**5.180~5.240 GHz**


(802.11a) Band Edge, Left Side

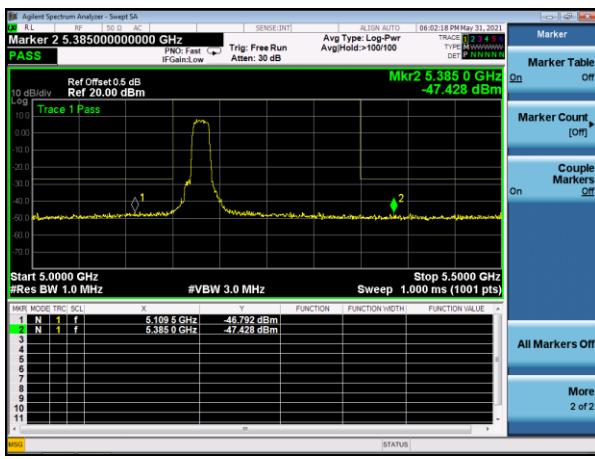


(802.11n20) Band Edge, Left Side

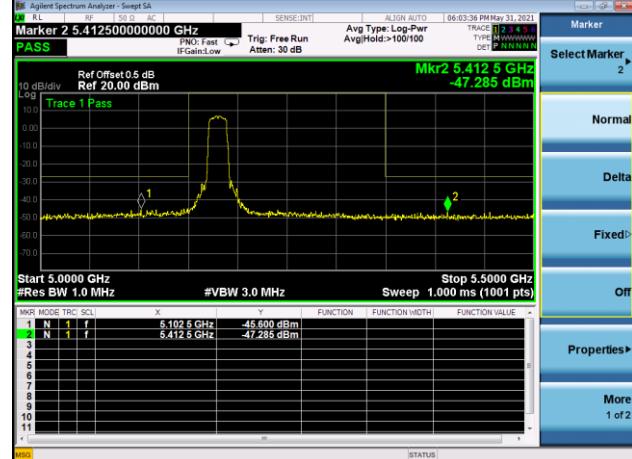

(802.11a) Band Edge, Right Side


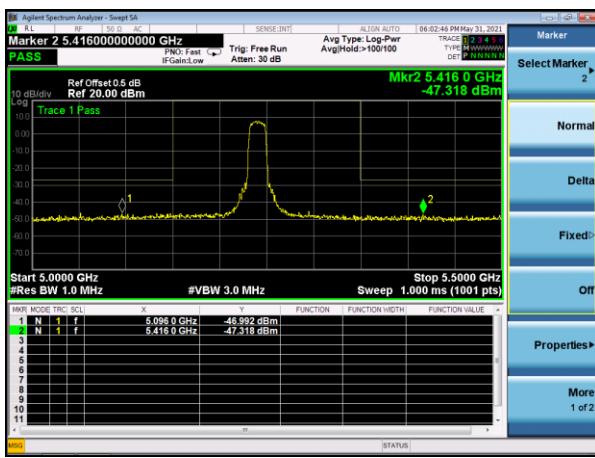


(802.11n20) Band Edge, Right Side

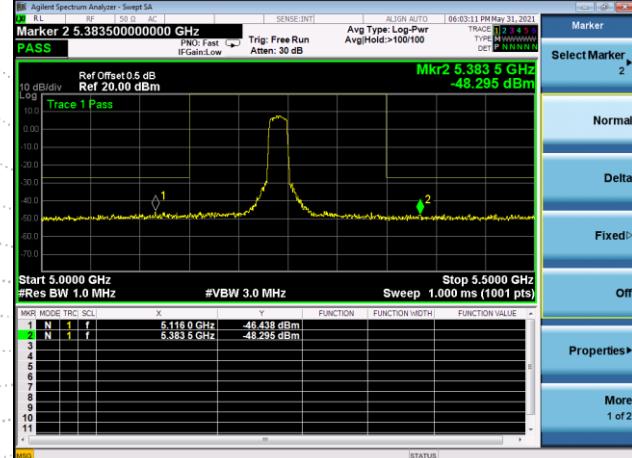


### 5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

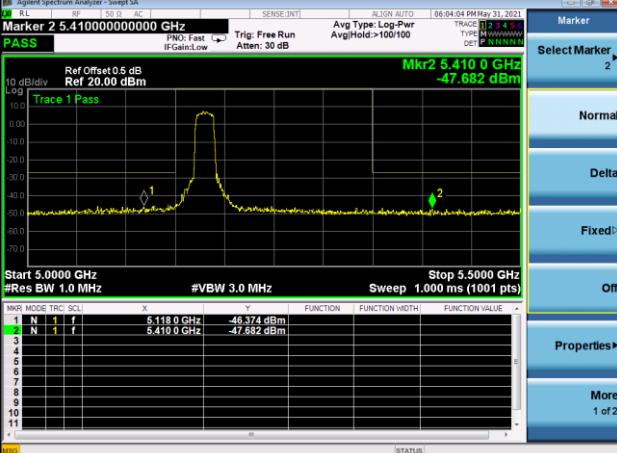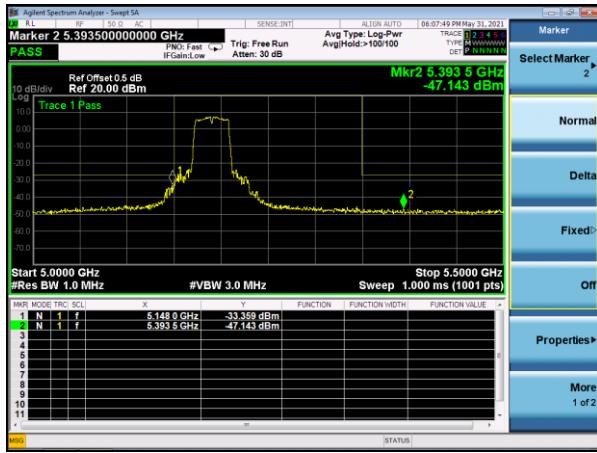

(802.11n40) Band Edge, Right Side

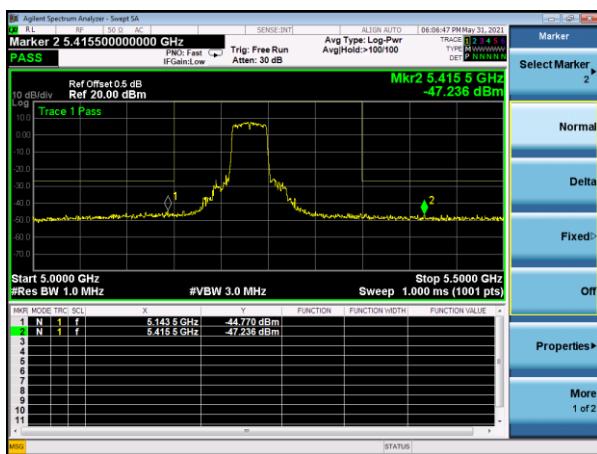


(802.11ac20) Band Edge, Right Side

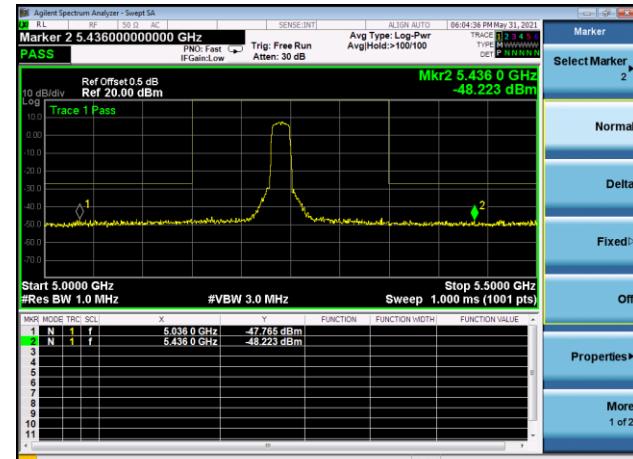

## 5.180~5.240 GHz


(802.11ac40) Band Edge, Left Side

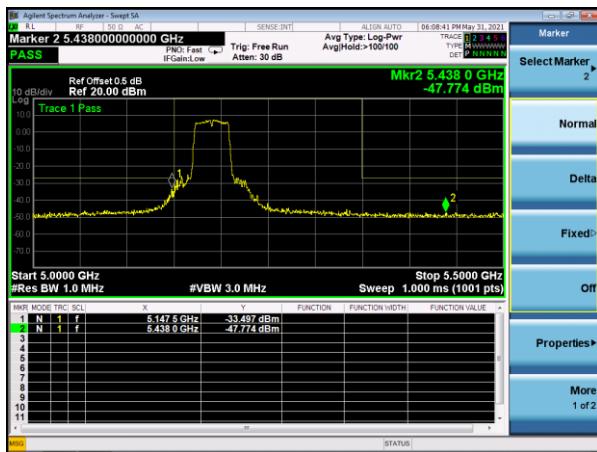


(802.11ac80) Band Edge, Left Side



(802.11ac40) Band Edge, Right Side

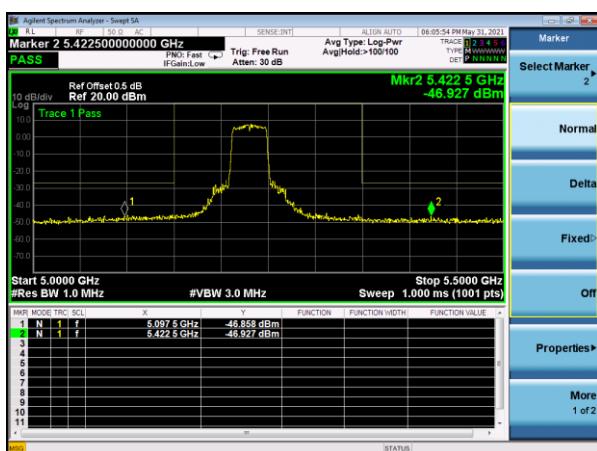

(802.11ac80) Band Edge, Right Side

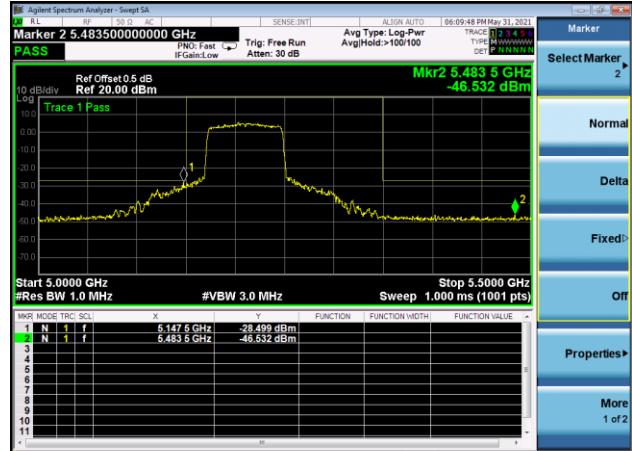

5.8G

### 5.745~5.825 GHz

(802.11a) Band Edge, Left Side

(802.11n20) Band Edge, Left Side



(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

