

CC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

LINGWEIDA Technology Co.,LTD

FCC ID: 2AXO7LDB

Report Type:

STD-JBO200907F

Product Type:

wireless doorbell


Test Engineer: Clint Chen



Report Number: STD-JBO200907F

Report Date: 2020-09-29

Reviewed By: Lion Li



Prepared By: Standard-Tech Co., Ltd. Testing Center
Standard-Tech Building, No. 6 Guanhong Road, Guangzhou
Science City, Guangzhou 510663, China
Tel: +86-20-32290320 /32290719
Fax: +86-20-32290422 /32290556
www.standard-tech.com

The device described above is tested by Standard-Tech Co., Ltd. Testing Center. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Standard-Tech Co., Ltd. Testing Center is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Standard-Tech Co., Ltd. Testing Center.

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	3
1.1. Description of Standards and Results.....	3
2. GENERAL INFORMATION.....	4
2.1. Description of Equipment Under Test.....	4
2.2. Equipments Used during the Test.....	4
2.3. Test Facility.....	6
2.4. Measurement Uncertainty (95% confidence levels, k=2).....	6
3. POWER LINE CONDUCTED EMISSION TEST.....	7
3.1. Block Diagram of Test Setup.....	7
3.2. Power Line Conducted Emission Test Limits.....	7
3.3. Test Procedure.....	7
3.4. Radiated Emission Test Results.....	7
4. RADIATED EMISSION TEST.....	10
4.1. Block Diagram of Test Setup.....	10
4.2. Radiated Emission Limit.....	11
4.3. Operating Condition of EUT.....	11
4.4. Test Procedure.....	11
4.5. Radiated Emission Test Results.....	11
5. STOP TRANSMITTING TIME TEST.....	15
5.1. Limit.....	15
5.2. Test result.....	15
6. CEASE TIME AFTER ACTIVATION TEST.....	16
6.1. Limit.....	16
6.2. Test Results.....	16
7. 20dB Bandwidth Test.....	17
7.1. Block Diagram of Test Setup.....	17
7.2. Limit.....	17
7.3. Test Results.....	17
8. ANTENNA REQUIREMENT.....	18

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Stop Transmitting Time Test	FCC Part 15: 15.231(a)(1)	PASS
Cease Time After Activation	FCC Part 15: 15.231(a)(2)	PASS
20dB Bandwidth Test	FCC Part 15: 15.231(a)(2)	PASS

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant:	LINGWEIDA Technology Co.,LTD
Manufacturer:	LINGWEIDA Technology Co.,LTD
Factory:	LINGWEIDA Technology Co.,LTD
Product:	wireless doorbell
Model No.:	LDB-A11, LDB-A12, LDB-A21, LDB-A22, LDB-A31, LDB-A32, WD-11, WD-21, WD-12, WD-22, WD-31, WD-32. (Remark: The circuit PCB of the above model is the same as the schematic diagram, but the color of the shell and the number of transmitters and receivers are different; so the test model is LDB-A11.)
Operation frequency:	433.92MHz
Power Adapter:	Input: DC 3.0V, 10mA
Antenna Type:	Spring antenna, 2dBi
Hardware version:	V1.0
Software version:	V1.0
Sample Type:	Prototype production
Date of Receipt:	2020-09-18
Date of Test:	2020/09/18-2020/09/28

2.2. Equipments Used during the Test

Conducted Emissions

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Shielding Room	AUDIX	N/A	N/A	2018/07/28	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESR7	101487	2020/07/29	2 Year
3.	V-LISN	Rohde & Schwarz	NNLK 8122	8122-00128	2019/07/20	2 Year
4.	RF Cable	YuanDao	RG223	N/A	2020/05/25	1 Year
5.	Test Software	AUDIX	e3	N/A	N/A	N/A

Note: N/A means Not applicable.

For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Semi-anechoic chamber	AUDIX	N/A	N/A	2018/11/18	3 Year
2.	EMI Test Receiver	R&S	ESR7	101487	2020/07/29	2 Year
3.	Biconical Logarithmic Antenna	SCHWARDZBECK	VULB 9162	9162-104	2019/01/06	2 Year
4.	Cable Line	PEWC	CFD400NL	N/A	2020/05/25	1 Year
5.	Loop Antenna	Beijing Daze	ZN30900C	1062	2019/12/20	1 Year
6.	Test Software	AUDIX	e3	N/A	N/A	1 Year

Note: N/A means Not applicable.

For frequency range above 1GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Semi-anechoic chamber	AUDIX	N/A	N/A	2018/11/18	3 Year
2	Spectrum Analyzer	R&S	FSP	100615	2019/12/11	1 Year
3	Horn Antenna	SCHWARDZBECK	BBHA 9170	895	2019/12/14	2 Year
4	Horn Antenna	SCHWARDZBECK	BBHA 9120 D	9120D-1515	2019/12/14	2 Year
5	Broadband Preamplifier	SCHWARDZBECK	BBV9718	9718-269	2019/12/19	2 Year
6	Broadband Preamplifier	SKET	LNPA-1840	SK2019121201	2019/12/16	2 Year
7	RF Cable	SKET	RC-40G-K-M /K-M-0.6M	N/A	2019/12/16	1 Year
8	RF Cable	SKET	RC-40G-K-M /K-M-0.6M	N/A	2019/12/16	1 Year
9	Test Software	AUDIX	e3	N/A	N/A	N/A

Note: N/A means Not applicable.

RF Conducted Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	R&S	FSP	100615	2019/12/11	1 Year
2.	RF Cable	STD	/	/	/	/

2.3. Test Facility

Site Description


Name of Firm	:	Standard-Tech Co., Ltd. Testing Center Standard-Tech Building, No. 6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China
EMC Lab.	:	Certificated by Industry Canada Registration Number: 20901 Valid Date: 2020/02/28 Certificated by FCC USA. Designation No.: CN1222 Valid Date: 2020/02/28

2.4.Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.42dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.94dB(30M~1GHz, Distance: 3m)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	4.92dB(1~6GHz, Distance: 3m)
	5.24dB(6~40GHz, Distance: 3m)
Uncertainty for Output power test	0.67dB
Uncertainty for Bandwidth test	83kHz

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

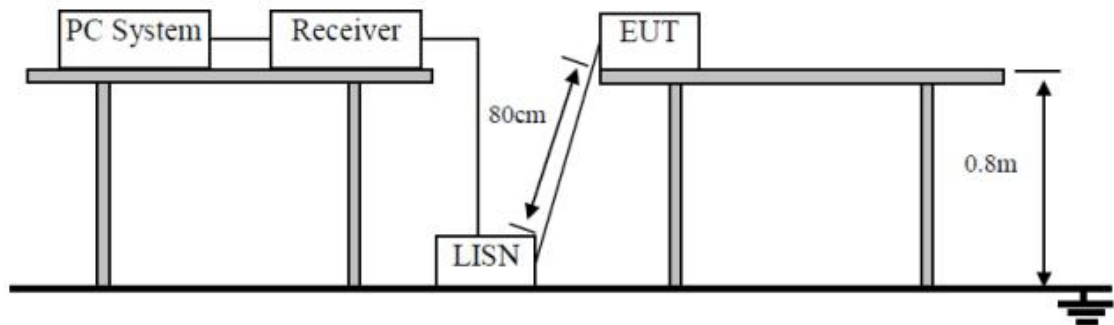

3.2. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.3. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (V-LISN). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESR7) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Radiated Emission Test Results


Pass

Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Margin (dB) = Limit (dB μ V) – Corrected Amplitude (dB μ V)

Test Line:


L

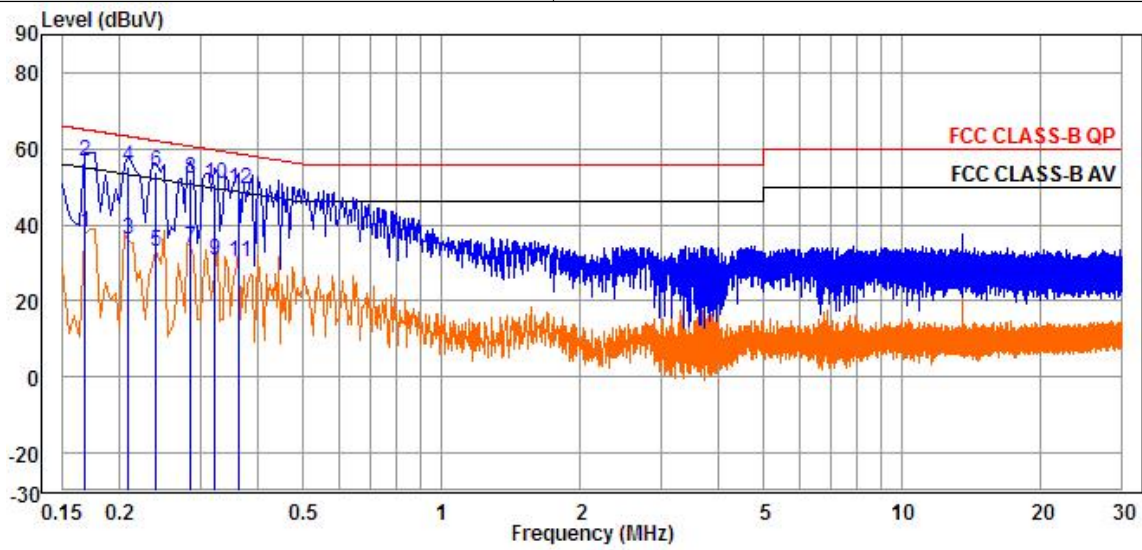

	Freq	Level	Read	Limit	Over	Pol/Phase	Remark
	MHz	dBuV	Level	Factor	Line	Limit	
			dBuV	dB	dBuV	dB	
1	0.17	37.85	37.70	0.15	55.06	-17.21	Line
2	0.17	56.85	56.70	0.15	65.06	-8.21	Line
3	0.21	36.14	36.00	0.14	53.27	-17.13	Line
4	0.21	55.14	55.00	0.14	63.27	-8.13	Line
5	0.24	32.83	32.70	0.13	52.10	-19.27	Line
6	0.24	53.83	53.70	0.13	62.10	-8.27	Line
7	0.28	34.04	33.90	0.14	50.67	-16.63	Line
8	0.28	52.04	51.90	0.14	60.67	-8.63	Line
9	0.32	30.64	30.50	0.14	49.68	-19.04	Line
10	0.32	50.64	50.50	0.14	59.68	-9.04	Line
11	0.36	30.33	30.20	0.13	48.69	-18.36	Line
12	0.36	49.33	49.20	0.13	58.69	-9.36	Line

Test Line:

N

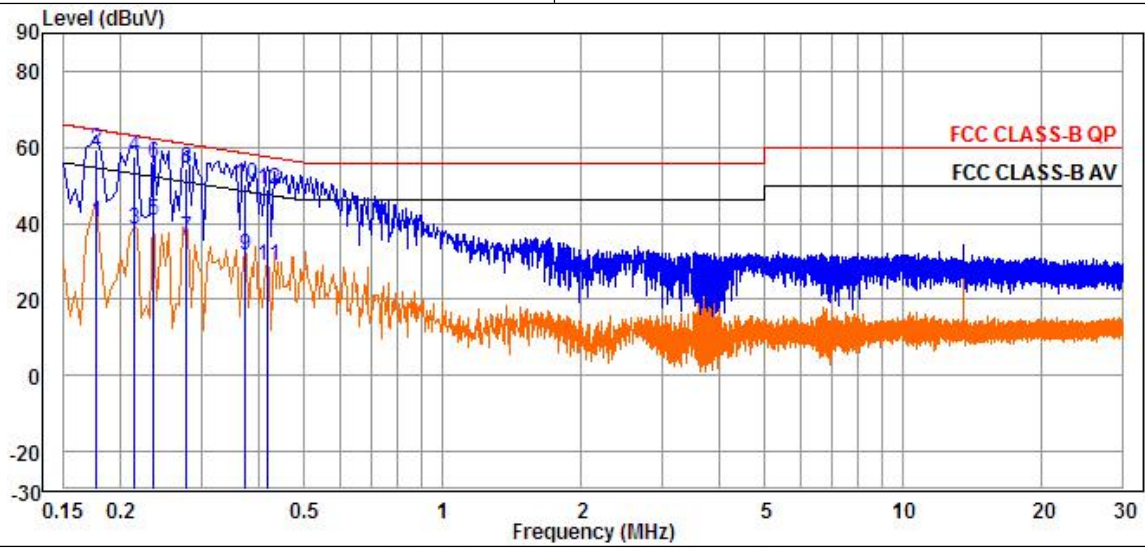


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB		
1	0.18	40.14	40.00	0.14	54.63	-14.49	Neutral	Average
2	0.18	59.64	59.50	0.14	64.63	-4.99	Neutral	QP
3	0.21	38.53	38.40	0.13	53.09	-14.56	Neutral	Average
4	0.21	57.53	57.40	0.13	63.09	-5.56	Neutral	QP
5	0.24	40.72	40.60	0.12	52.25	-11.53	Neutral	Average
6	0.24	55.72	55.60	0.12	62.25	-6.53	Neutral	QP
7	0.28	36.33	36.20	0.13	50.94	-14.61	Neutral	Average
8	0.28	54.33	54.20	0.13	60.94	-6.61	Neutral	QP
9	0.37	31.45	31.30	0.15	48.49	-17.04	Neutral	Average
10	0.37	50.45	50.30	0.15	58.49	-8.04	Neutral	QP
11	0.42	29.07	28.90	0.17	47.54	-18.47	Neutral	Average
12	0.42	49.07	48.90	0.17	57.54	-8.47	Neutral	QP


4. RADIATED EMISSION TEST

4.1. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

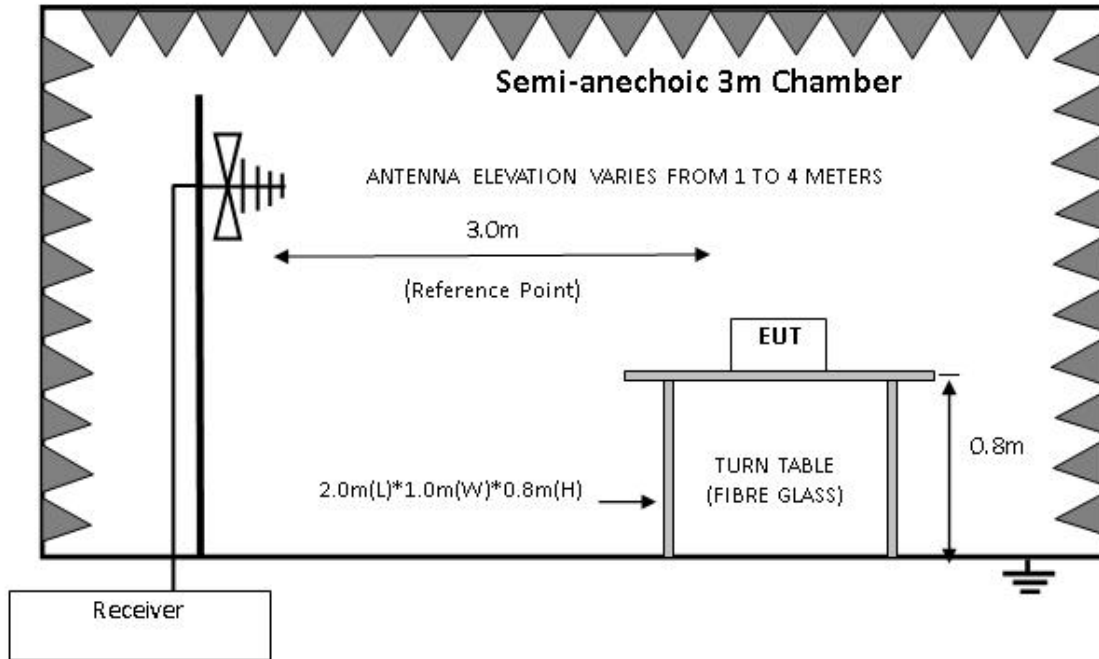

For frequency range above 1GHz

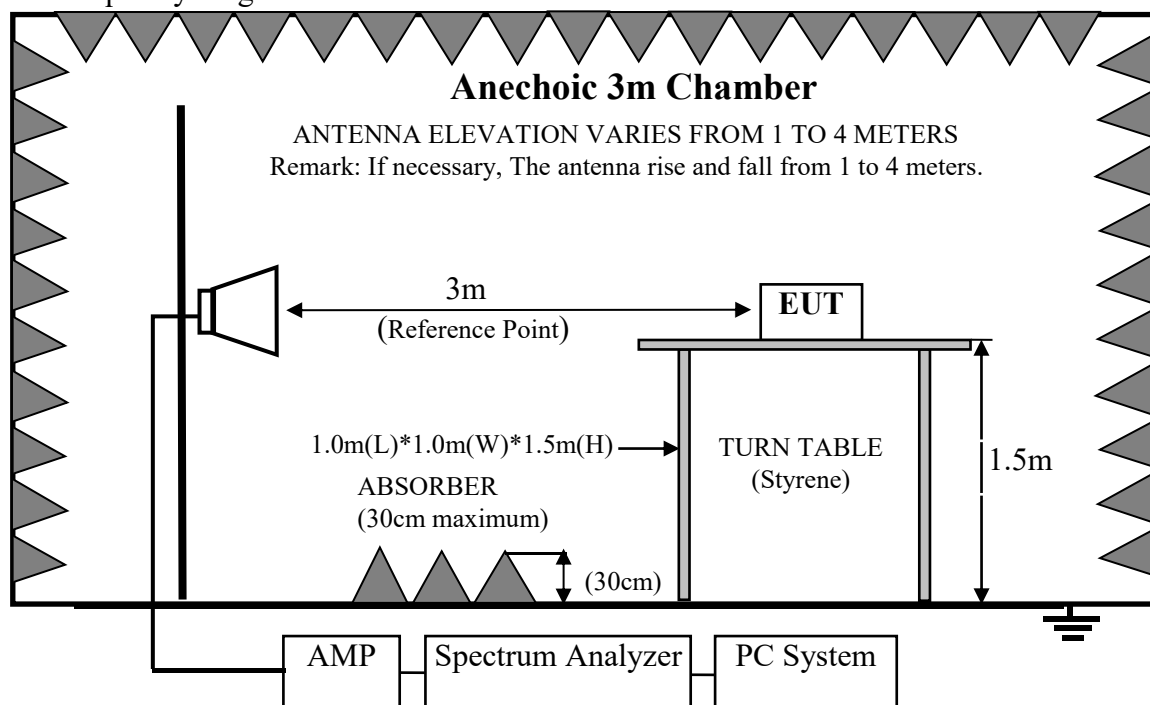

4.2. Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Fundamental Frequency(MHz)	Field Strength of Fundamental	Field Strength of Spurious emissions
433.92	QP:80.83dBuV/m at 3m distance	AV:60.83dBuV/m at 3m distance (Above 1GHz) PK:80.83dBuV/m at 3m distance (Above 1GHz) QP:60.83dBuV/m at 3m distance (Below 1GHz)

Note: The spurious emissions appearing within the frequency band listed in 15.205 Shall also comply with limits shown in section 15.209

4.3. Operating Condition of EUT

- 4.3.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.3.2. Turn on the power of all equipments.
- 4.3.3. Let EUT work in Tx mode.

4.4. Test Procedure

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz


4.5. Radiated Emission Test Results

PASS.

Frequency: 30MHz~1GHz

Polarization:


Horizontal

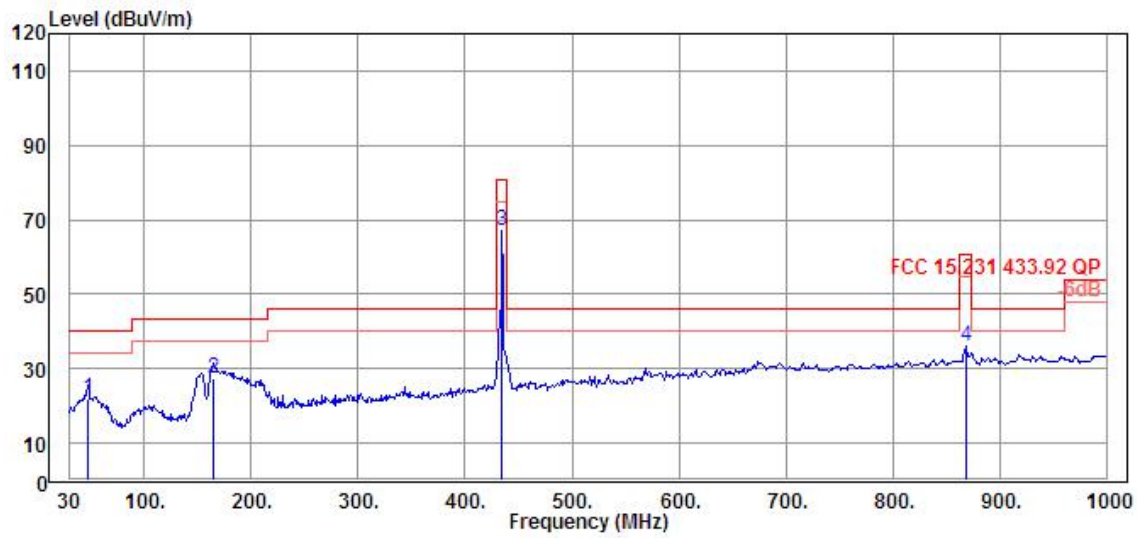

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	47.46	21.71	-1.17	22.88	40.00	-18.29	Horizontal	QP
2	163.86	27.46	10.36	17.10	43.50	-16.04	Horizontal	QP
3	434.49	67.25	41.83	25.42	80.83	-13.58	Horizontal	Peak
4	869.13	35.92	3.52	32.40	60.83	-24.91	Horizontal	Peak

Polarization:

Vertical

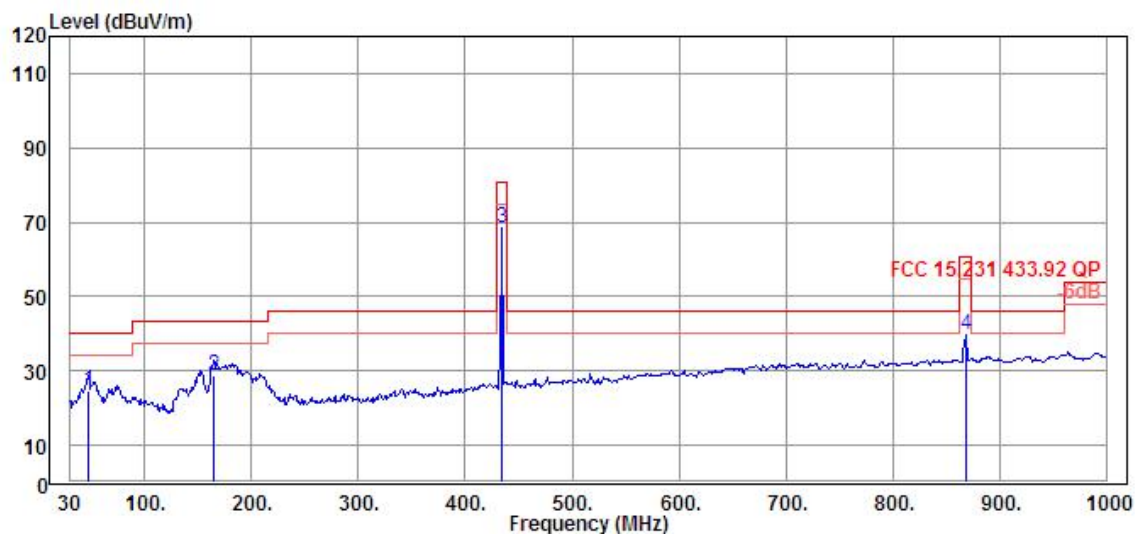

	Freq	Level	Read		Limit	Over		
			Level	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	46.49	24.67	1.80	22.87	40.00	-15.33	Vertical	QP
2	164.83	28.68	11.54	17.14	43.50	-14.82	Vertical	QP
3	433.52	68.57	43.15	25.42	80.83	-12.26	Vertical	Peak
4	869.13	39.86	7.46	32.40	60.83	-20.97	Vertical	Peak

Frequency: above 1GHz

802.11b					CH01			
	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	2170.00	47.35	51.29	-3.94	74.00	-26.65	Horizontal	Peak
2	3910.00	46.37	47.42	-1.05	74.00	-27.63	Horizontal	Peak
3	4780.00	41.50	40.08	1.42	74.00	-32.50	Horizontal	Peak

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	2060.00	21.82	25.96	-4.14	54.00	-32.18	Horizontal	Average
2	3040.00	32.66	34.79	-2.13	54.00	-21.34	Horizontal	Average
3	4780.00	26.96	25.54	1.42	54.00	-27.04	Horizontal	Average

802.11b					CH06			
	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	1300.00	37.43	44.05	-6.62	74.00	-36.57	Vertical	Peak
2	2170.00	44.22	48.16	-3.94	74.00	-29.78	Vertical	Peak
3	3910.00	41.42	42.47	-1.05	74.00	-32.58	Vertical	Peak

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		
1	1820.00	22.06	26.92	-4.86	54.00	-31.94	Vertical	Average
2	3040.00	26.07	28.20	-2.13	54.00	-27.93	Vertical	Average
3	3910.00	27.42	28.47	-1.05	54.00	-26.58	Vertical	Average


5. STOP TRANSMITTING TIME TEST

5.1.Limit

Per Part 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released Test Procedure

5.2.Test result

Frequency (MHz)	Test Mode	Stop Transmitting Time (s)	Limit (s)
433.92	Tx	0.56	<5
Conclusion: Pass			

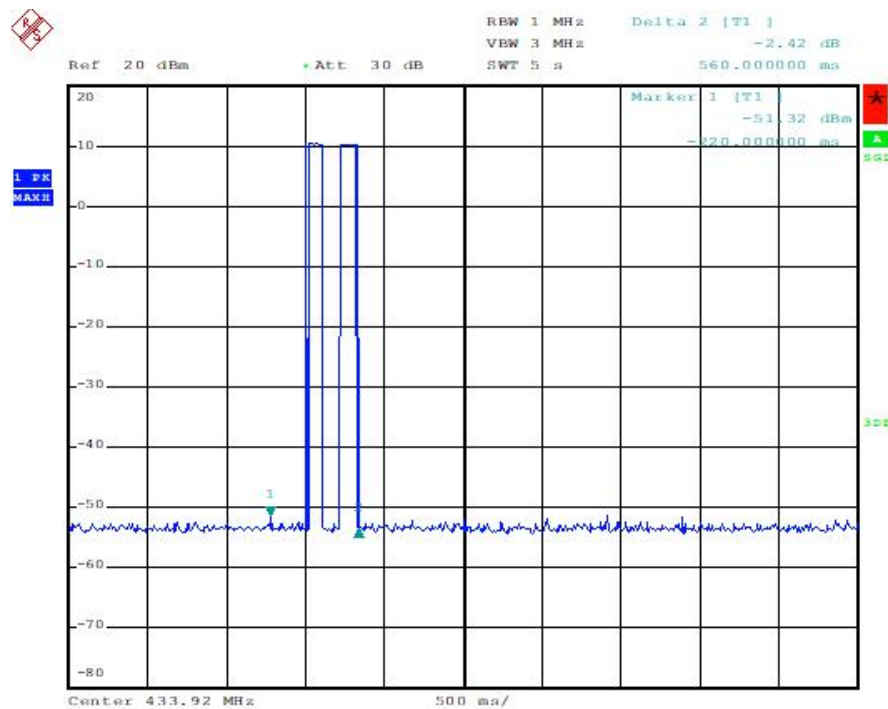


6. CEASE TIME AFTER ACTIVATION TEST

6.1.Limit

Per Part 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.


6.2.Test Results

Frequency (MHz)	Test Mode	Stop Transmitting Time (s)	Limit (s)
433.92	Tx	0.35	<5
Conclusion: Pass			

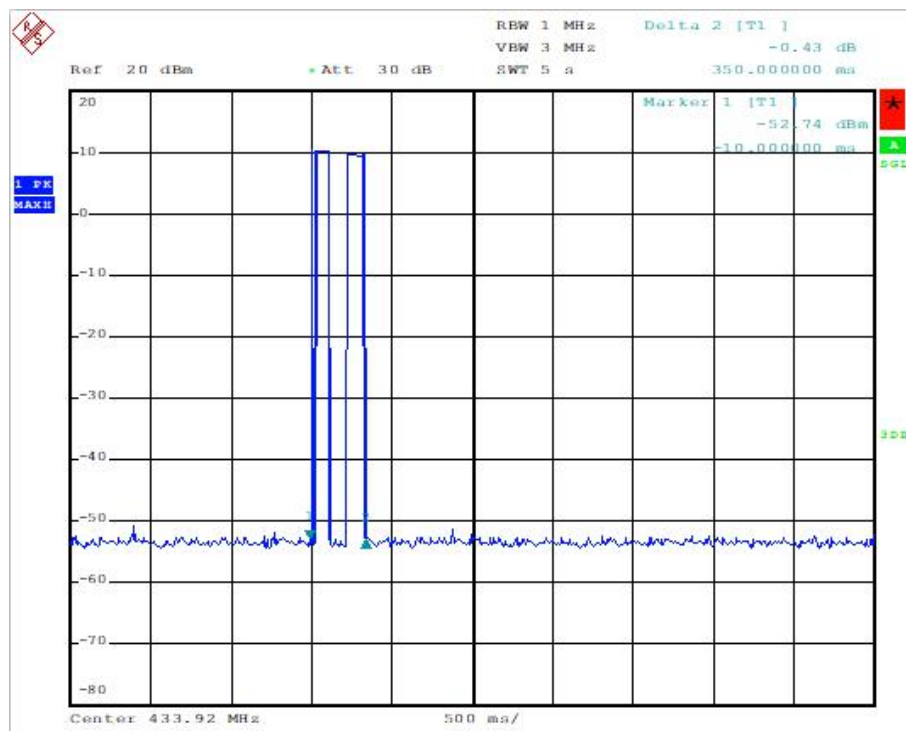

7. 20dB Bandwidth Test

7.1. Block Diagram of Test Setup

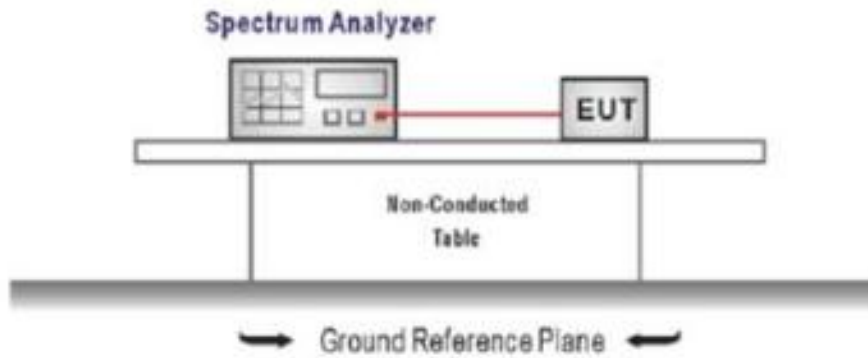


7.2. Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency.

7.3. Test Results

Frequency (MHz)	Test Mode	-20dB Bandwidth (kHz)	Limit (MHz)
433.92	Tx	97.0	<1.0848
Conclusion: Pass			

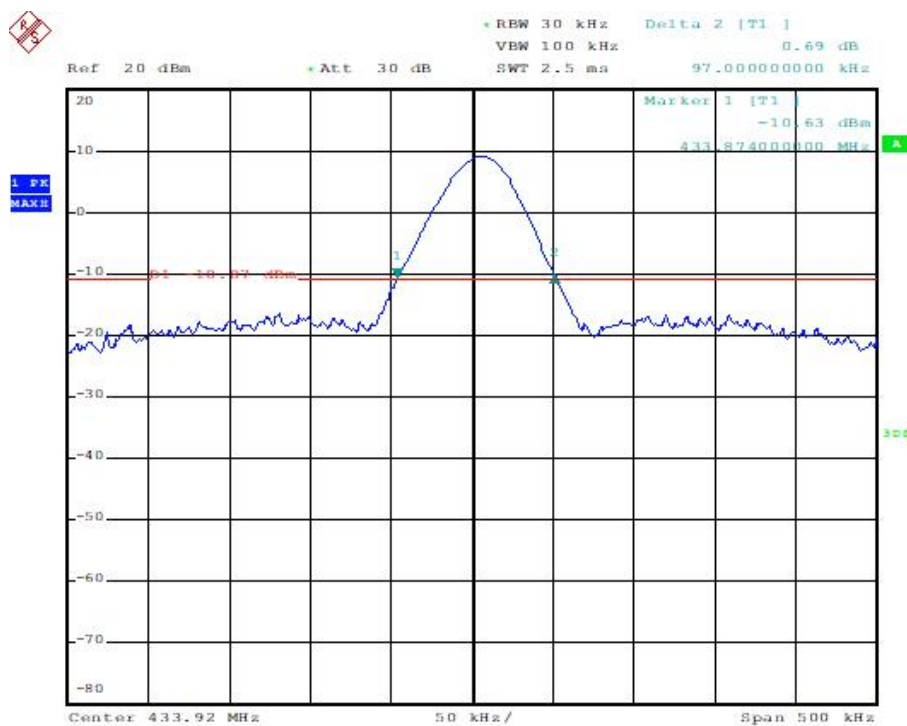

8. ANTENNA REQUIREMENT

RESULT: **PASS**

Test standard: **FCC Part 15.231**

Limit: **the use of antennas with directional gains that do not exceed 6 dBi**

According to the manufacturer declared, the EUT has an Spring antenna, the directional gain of antenna is 2.0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision.

*****End of Report*****