

RF Exposure	Reference Test Report No: ULR- TC568820300000062F	Seite 1 von 3 Page 1 of 3
-------------	--	------------------------------

RF Exposure Report

Following FCC KDB 447498 D01 General SAR test exclusion guidelines

The corresponding SAR exclusion threshold condition, listed below:

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation Distances \leq 50 mm are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g.

Extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison. The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $<$ 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion (447498 D01 General RF Exposure Guidance v06)

2) At 100 MHz to 6 GHz and for test separation distances $>$ 50 mm, the SAR test exclusion threshold is determined according to the following

- $[\text{Power allowed at numeric threshold for 50 mm in step 1} + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)] \text{ mW}$, at 100 MHz to 1500 MHz
- $[\text{Power allowed at numeric threshold for 50 mm in step 1} + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$ at $>$ 1500 MHz and \leq 6 GHz

3) At frequencies below 100 MHz, the following may be considered for SAR test exclusion,

- The power threshold at the corresponding test separation distance at 100 MHz in step 2) is multiplied by $[1 + \log(100/f(\text{MHz}))]$ for *test separation distances* $>$ 50 mm and $<$ 200 mm
- The power threshold determined by the equation in a) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$ for *test separation distances* \leq 50 mm
- SAR measurement procedures are not established below 100 MHz. When SAR test exclusion cannot be applied, a KDB inquiry is required to determine SAR evaluation requirements for any test results to be acceptable.

RF Exposure**Reference Test Report No: ULR-
TC568820300000062F**Seite 2 von 3
Page 2 of 3**SAR Test Exclusion Thresholds****Maximum Measured Transmitter Power:****Exclusion calculation considering conducted power**

Frequency (GHz)	Max.Power (dBm)	Tune-up value	Max.Power Including Tune-up Tolarence (dBm)	Max.Power Including Tune-up Tolarence (mW)	Minimum test separation distance (mm)	SAR Test Exclusion Calculation Values	1-g Extremity SAR Test exclusion Threshold
2.402	-8.03	1	-7.03	0.19815	1.49	0.206107744	3
2.440	-8.01	1	-7.01	0.199	1.49	0.208622777	3
2.480	-7.11	1	-6.11	0.25061	1.49	0.26487317	3


Exclusion calculation considering radiated E I R P

Frequency (GHz)	Max.Power (dBm)	Tune-up value	Antenn a gain (dBi)	Max.Power Including Tune-up Tolarence & antenna gain (dBm)	Max.Power Including Tune-up Tolarence & antenna gain (mW)	Minimum test separatio n distance (mm)	SAR Test Exclusion Calculati on Values	1-g Extremity SAR Test exclusion Threshold
2.402	-8.03	1	0.5	-6.53	0.222330989	1.49	0.23126	3
2.440	-8.01	1	0.5	-6.51	0.223357222	1.49	0.234158	3
2.480	-7.11	1	0.5	-5.61	0.274789415	1.49	0.290429	3


From above table calculation the EUT is exempted from routine SAR evaluation

Note:


1. SAR exclusion threshold is calculated using condition1 formulas.
2. Conducted power is taken from the RF test report ULR-TC568820300000062F
3. Antenna gain values are taken from Antenna data sheet.

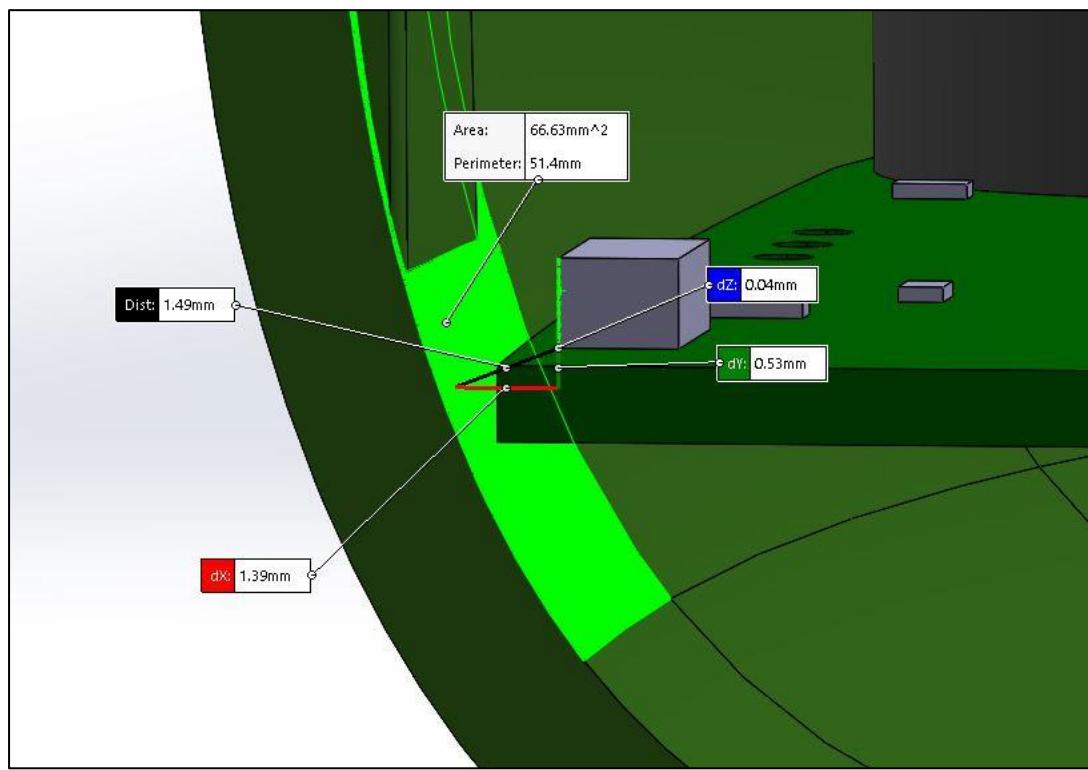Dimension diagram of EUT antenna and closest enclosure

Minimum separation distance between

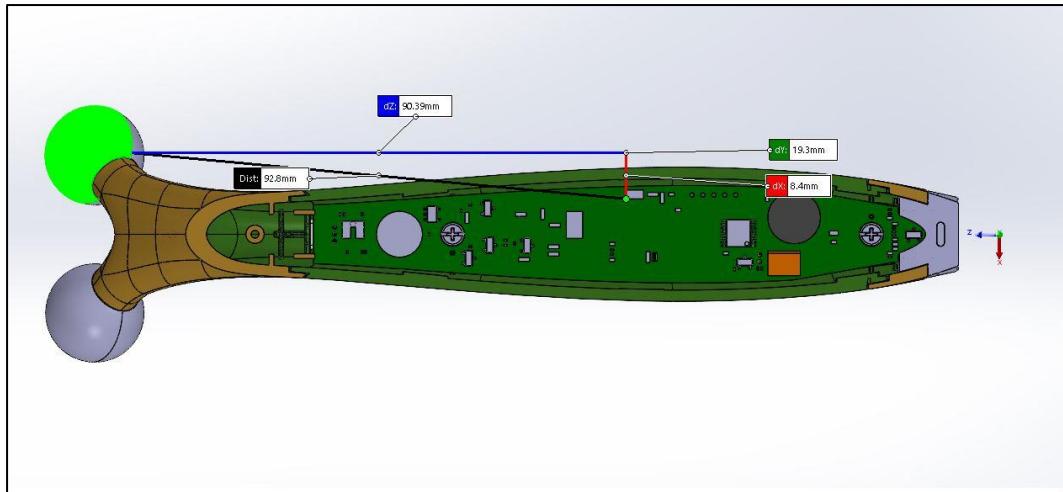

Separation distance between Antenna and Electrode

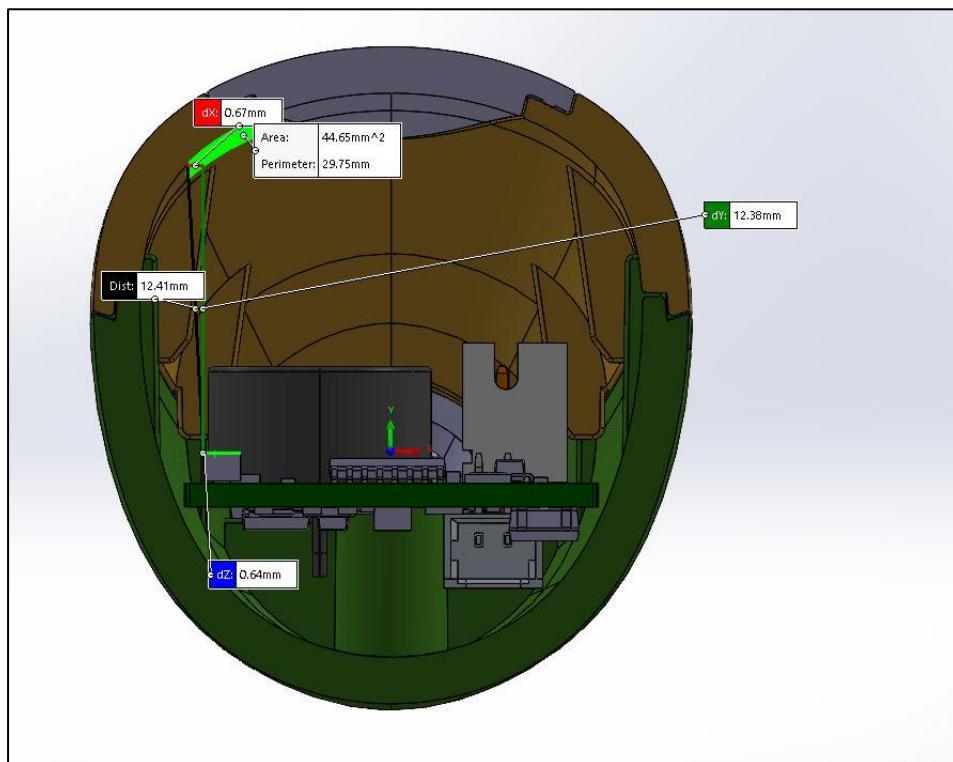

Separation distance between Antenna and top outer surface

****END OF TEST REPORT****