



FCC Test Report

Report No: FCS202009002W01

Issued for

Applicant:	SANHE PLASTIC TOY INDUSTRY CO.,LTD
Address:	Beside Chenghua primary School, Wenguan Road, Chenghai District, Shantou City, Guangdong Province.
Product Name:	High Speed Remote Control Vehicle
Brand Name:	N/A
Model Name:	G171
Series Model:	G172,G173,G174,G175,G176,G177,G178,G179,G180,G181, G182,G183,G184,G185,G186,G187,G188,G189,G190,G191, 258,278,288,2035,2036,661,662,2032-1,073,077, 260ES-A,260ES-B,260ES-C,HAK101,S222
FCC ID:	2AXPY-G171
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name : SANHE PLASTIC TOY INDUSTRY CO.,LTD

Address : Beside Chenghua primary School, Wenguan Road, Chenghai District, Shantou City, Guangdong Province.

Manufacture's Name : SANHE PLASTIC TOY INDUSTRY CO.,LTD

Address : Beside Chenghua primary School, Wenguan Road, Chenghai District, Shantou City, Guangdong Province.

Product Description

Product Name : High Speed Remote Control Vehicle

Brand Name : N/A

Model Name : G171

Series Model : G172,G173,G174,G175,G176,G177,G178,G179,G180,G181,G182,G183, G184,G185,G186,G187,G188,G189,G190,G191,258,278,288,2035,2036, 661,662,2032-1,073,077,260ES-A,260ES-B,260ES-C,HAK101,S222

Test Standards : FCC Rules and Regulations Part 15 Subpart C, Section 249

Test Procedure : ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test

Date (s) of performance of tests : Septemper 01, 2020 ~ Septemper 23, 2020

Date of Issue : Septemper 23, 2020

Test Result : Pass

Tested by : 

(Scott Shen)

Reviewed by : 

(Duke Qian)

Approved by : 

(Kait Chen)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION.....	7
2.1 GENERAL DESCRIPTION OF THE EUT.....	7
2.2 DESCRIPTION OF THE TEST MODES.....	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS.....	10
2.4 EQUIPMENTS LIST.....	11
3. RADIATED EMISSION MEASUREMENT.....	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	14
3.4 TEST RESULTS	15
4. BAND EDGE TEST	22
4.1 LIMIT	22
4.2 TEST PROCEDURE	22
4.3 TEST SETUP	23
4.4 TEST RESULTS	24
5. 20 DB BANDWIDTH TEST.....	28
5.1 LIMIT	28
5.2 TEST PROCEDURE	28
5.3 TEST SETUP	28
5.4 TEST RESULTS	29
6. ANTENNA REQUIREMENT.....	31
6.1 STANDARD REQUIREMENT	31
6.2 EUT ANTENNA.....	31

Revision History

Rev.	Issue Date	Effect Page	Contents
00	Septemper 23, 2020	All	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated(<1G) 30MHz-1000MHz	± 3.2 dB
6	All emissions, radiated (1GHz -18GHz)	± 3.66 dB
7	All emissions, radiated (18GHz -40GHz)	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	High Speed Remote Control Vehicle
Trade Name	N/A
Model Name	G171
Series Model	G172,G173,G174,G175,G176,G177,G178,G179, G180,G181,G182,G183,G184,G185,G186,G187,G188, G189,G190,G191,258,278,288,2035,2036,661,662, 2032-1,073,077,260ES-A,260ES-B,260ES-C,HAK101, S222
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, only different color
Channel List	Please refer to the Note 2.
Frequency:	2407-2475MHz
Modulation:	GFSK
Channel number:	69CH
Power Supply	DC 4.5V (3*1.5VAA)
Hardware version number	V1.1
Software version number	V1.1
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2407MHz	19	2425MHz	37	2443MHz	55	2461MHz
2	2408MHz	20	2426MHz	38	2444MHz	56	2462MHz
3	2409MHz	21	2427MHz	39	2445MHz	57	2463MHz
4	2410MHz	22	2428MHz	40	2446MHz	58	2464MHz
5	2411MHz	23	2429MHz	41	2447MHz	59	2465MHz
6	2412MHz	24	2430MHz	42	2448MHz	60	2466MHz
7	2413MHz	25	2431MHz	43	2449MHz	61	2467MHz
8	2414MHz	26	2432MHz	44	2450MHz	62	2468MHz
9	2415MHz	27	2433MHz	45	2451MHz	63	2469MHz
10	2416MHz	28	2434MHz	46	2452MHz	64	2470MHz
11	2417MHz	29	2435MHz	47	2453MHz	65	2471MHz
12	2418MHz	30	2436MHz	48	2454MHz	66	2472MHz
13	2419MHz	31	2437MHz	49	2455MHz	67	2473MHz
14	2420MHz	32	2438MHz	50	2456MHz	68	2474MHz
15	2421MHz	33	2439MHz	51	2457MHz	69	2475MHz
16	2422MHz	34	2440MHz	52	2458MHz		
17	2423MHz	35	2441MHz	53	2459MHz		
18	2424MHz	36	2442MHz	54	2460MHz		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	2.4g copper antenna	N/A	2.00dBi	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: FCC tool


The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

1. All the test modes can be supply by DC 4.5V , only the result of the worst case recorded in the report..
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.

Configuration and peripherals

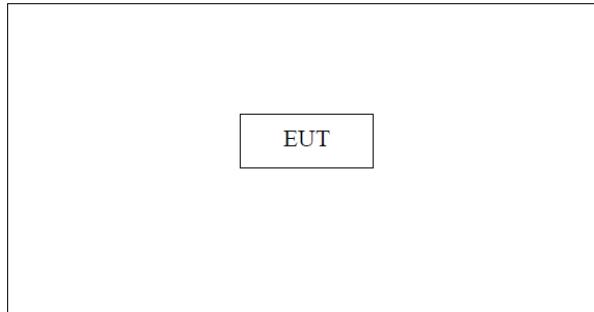

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1					
2					

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2019.10.11	2020.10.10
Signal Analyzer	R&S	FSV40-N	FCS-E012	2019.10.11	2020.10.10
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2019.10.11	2020.10.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2019.10.26	2020.10.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2019.10.11	2020.10.10
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2019.10.11	2020.10.10
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2019.10.11	2020.10.10
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2019.10.03	2020.10.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2019.10.08	2020.10.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2019.10.11	2020.10.10

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2019.10.11	2020.10.10
LISN	R&S	ENV216	FCS-E007	2019.10.11	2020.10.10
LISN	ETS	3810/2NM	FCS-E009	2019.10.15	2020.10.14
Temperature & Humidity	HTC-1	victor	FCS-E008	2019.10.11	2020.10.10

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2019.10.02	2020.10.01
Spectrum Analyzer	Agilent	E4447A	MY50180039	2019.11.08	2020.11.07
Spectrum Analyzer	R&S	FSV-40	101499	2019.10.10	2020.10.09

3. RADIATED EMISSION MEASUREMENT

3.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz PK detector is used


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

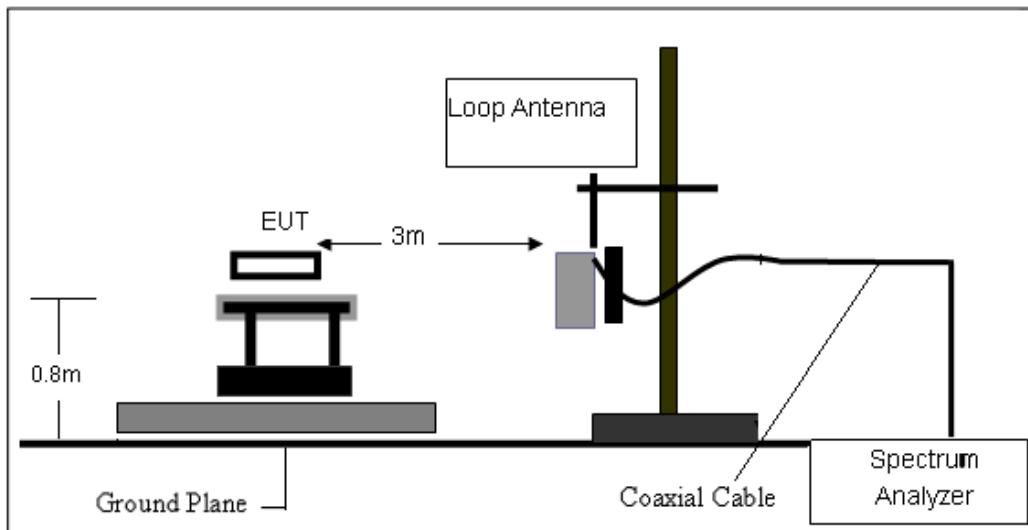

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

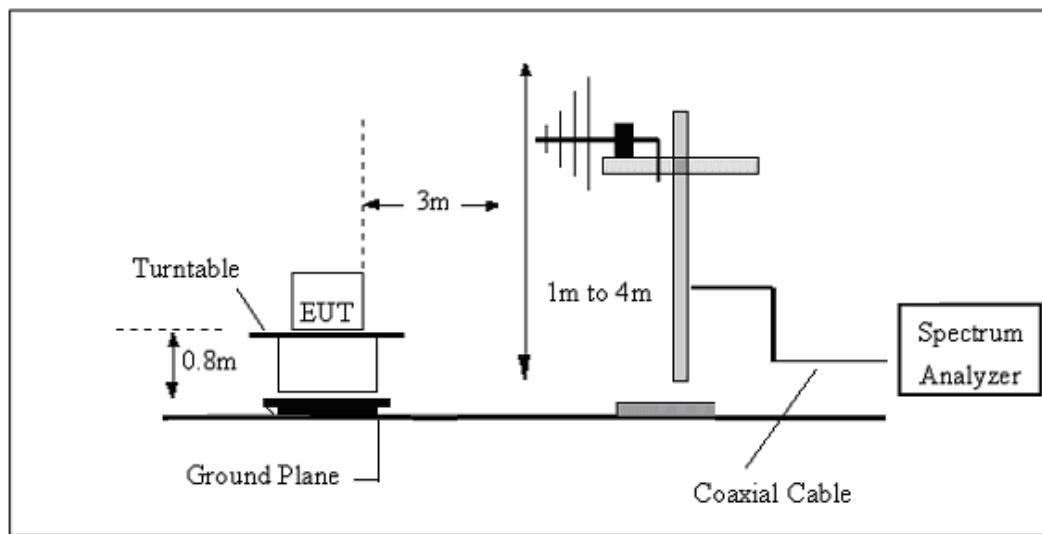

(C) Radiated Emission Test-Up Frequency Above 1GHz

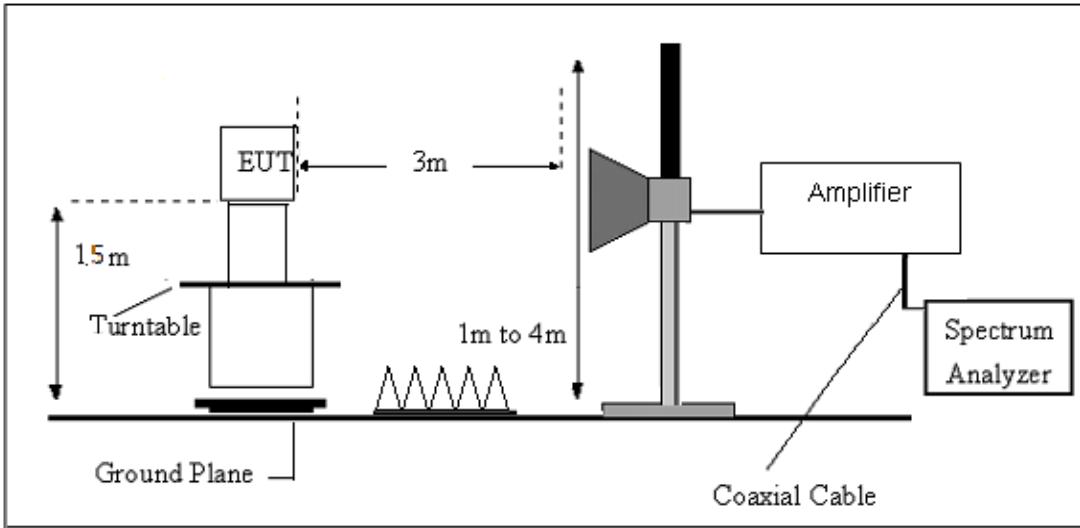

3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	GFSK	Test Voltage:	DC 4.5V

For field strength of the fundamental signal

Peak value

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2407	90.33	26.68	6.31	30.91	92.41	114	-21.59	H
2	2407	89.21	26.68	6.31	30.91	91.29	114	-22.71	V
3	2440	91.04	26.38	6.43	30.68	93.18	114	-20.82	H
4	2440	90.56	26.38	6.43	30.68	92.69	114	-21.31	V
5	2475	89.26	26.29	6.58	30.46	91.67	114	-22.33	H
6	2475	86.76	26.29	6.58	30.46	89.16	114	-24.84	V

Average value

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2407	81.17	26.68	6.31	30.91	83.25	94	-10.75	H
2	2407	76.04	26.68	6.31	30.91	78.12	94	-15.88	V
3	2440	81.36	26.38	6.43	30.68	83.49	94	-10.51	H
4	2440	80.24	26.38	6.43	30.68	82.37	94	-11.63	V
5	2475	77.16	26.29	6.58	30.46	79.57	94	-14.43	H
6	2475	72.24	26.29	6.58	30.46	75.64	94	-18.36	V

Note: RBW>20dB BW,VBW>RBW ,PK detector for PK value ,RMS detector for AV value.

For spurious emission

(9KHz-30MHz)

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuv) + distance extrapolation factor.


(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 4.5V	Phase:	Horizontal
Test Mode:	GFSK		

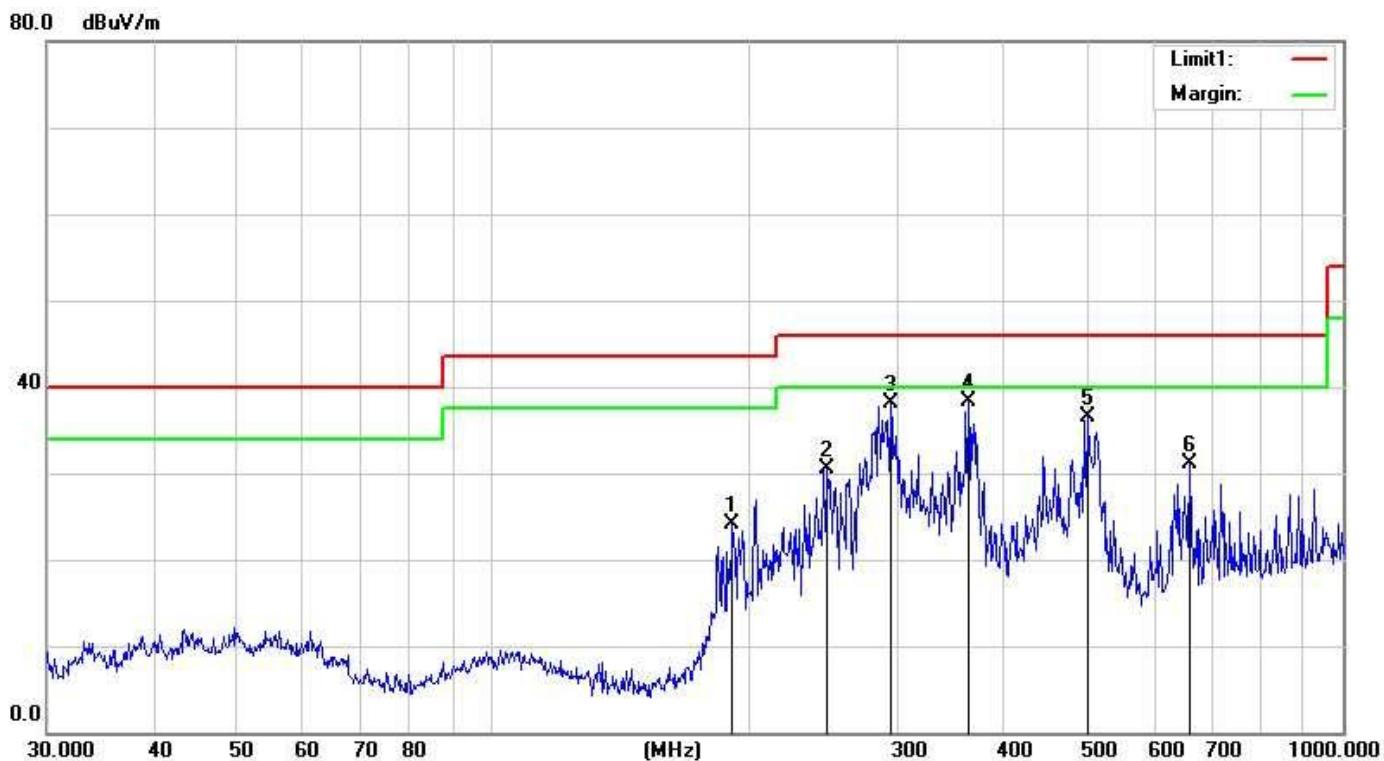

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
191.7450	45.16	-21.15	24.01	43.50	-19.49	QP
247.6820	49.95	-19.42	30.53	46.00	-15.47	QP
294.1137	55.92	-17.86	38.06	46.00	-7.94	QP
362.9844	54.86	-16.48	38.38	46.00	-7.62	QP
501.1790	51.14	-14.54	36.60	46.00	-9.40	QP
661.1505	42.82	-11.80	31.02	46.00	-14.98	QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 4.5V	Phase:	Vertical
Test Mode:	GFSK		

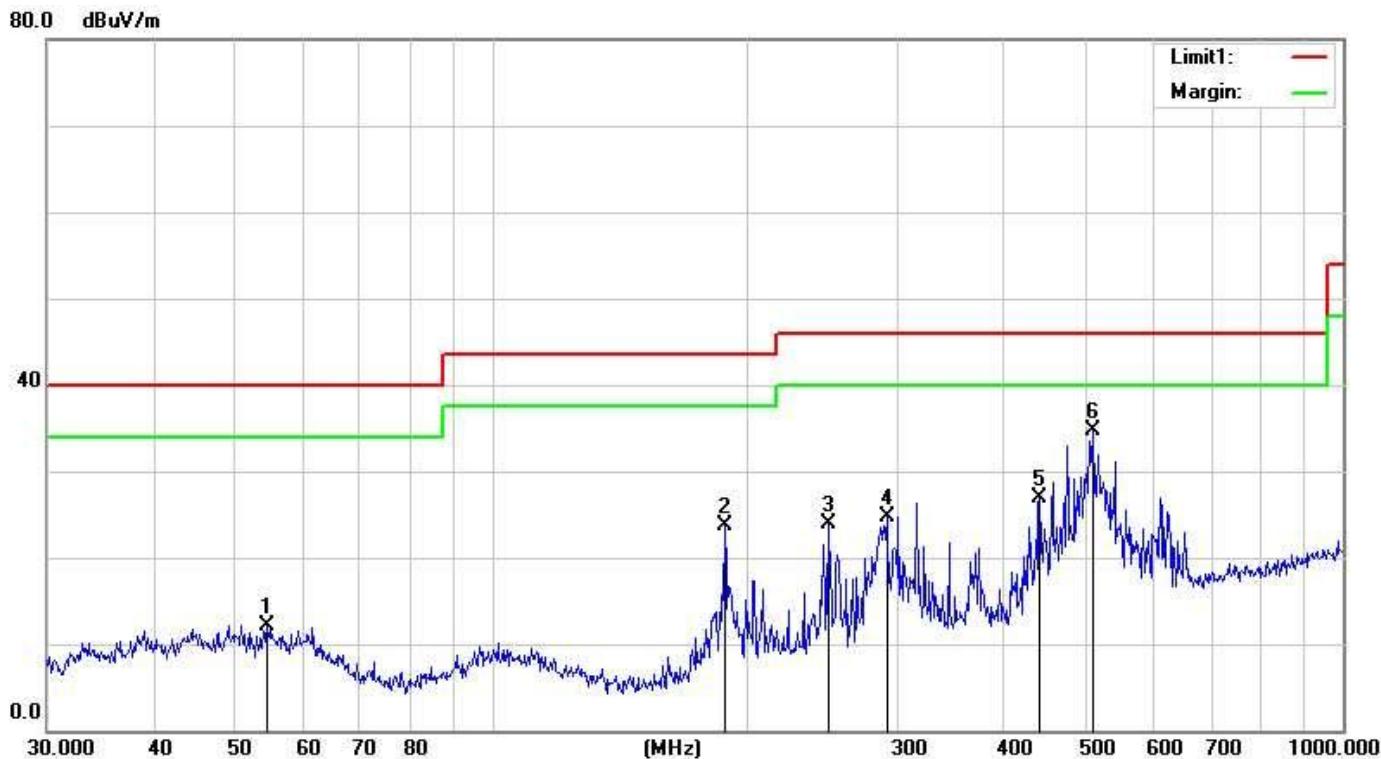

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
54.4516	30.34	-18.31	12.03	40.00	-27.97	QP
187.7530	45.29	-21.65	23.64	43.50	-19.86	QP
248.5520	43.28	-19.42	23.86	46.00	-22.14	QP
291.0360	42.77	-17.97	24.80	46.00	-21.20	QP
440.1963	42.69	-15.84	26.85	46.00	-19.15	QP
508.2582	49.24	-14.53	34.71	46.00	-11.29	QP

(1GHZ~25GHZ)

LOW CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4814.00	35.61	31.79	8.61	32.08	43.93	74.00	-30.07	Vertical
7221.00	30.71	36.16	11.66	31.99	46.54	74.00	-27.46	Vertical
9628.00	30.47	37.96	14.15	31.61	50.97	74.00	-23.03	Vertical
12035.00	*					74.00		Vertical
14442.00	*					74.00		Vertical
4814.00	39.55	31.79	8.61	32.08	47.87	74.00	-26.13	Horizontal
7221.00	32.31	36.16	11.66	31.99	48.14	74.00	-25.86	Horizontal
9628.00	29.73	37.96	14.15	31.61	50.23	74.00	-23.77	Horizontal
12035.00	*					74.00		Horizontal
14442.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4814.00	24.75	31.79	8.61	32.08	33.07	54.00	-20.93	Vertical
7221.00	19.58	36.16	11.66	31.99	35.41	54.00	-18.59	Vertical
9628.00	18.77	37.96	14.15	31.61	39.27	54.00	-14.73	Vertical
12035.00	*					54.00		Vertical
14442.00	*					54.00		Vertical
4814.00	28.79	31.79	8.61	32.08	37.11	54.00	-16.89	Horizontal
7221.00	21.65	36.16	11.66	31.99	37.48	54.00	-16.52	Horizontal
9628.00	18.36	37.96	14.15	31.61	38.86	54.00	-15.14	Horizontal
12035.00	*					54.00		Horizontal
14442.00	*					54.00		Horizontal

MIDDLE CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	35.93	31.86	8.68	32.01	44.46	74.00	-29.54	Vertical
7335.00	30.92	36.38	11.73	31.88	47.15	74.00	-26.85	Vertical
9780.00	30.66	38.36	14.26	31.52	51.76	74.00	-22.24	Vertical
12225.00	*					74.00		Vertical
14670.00	*					74.00		Vertical
4890.00	39.94	31.86	8.68	32.01	48.47	74.00	-25.53	Horizontal
7335.00	32.55	36.38	11.73	31.88	48.78	74.00	-25.22	Horizontal
9780.00	29.95	38.36	14.26	31.52	51.05	74.00	-22.95	Horizontal
12225.00	*					74.00		Horizontal
14670.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	25.01	31.86	8.68	32.01	33.54	54.00	-20.46	Vertical
7335.00	19.76	36.38	11.73	31.88	35.99	54.00	-18.01	Vertical
9780.00	18.93	38.36	14.26	31.52	40.03	54.00	-13.97	Vertical
12225.00	*					54.00		Vertical
14670.00	*					54.00		Vertical
4890.00	29.09	31.86	8.68	32.01	37.62	54.00	-16.38	Horizontal
7335.00	21.85	36.38	11.73	31.88	38.08	54.00	-15.92	Horizontal
9780.00	18.54	38.36	14.26	31.52	39.64	54.00	-14.36	Horizontal
12225.00	*					54.00		Horizontal
14670.00	*					54.00		Horizontal

HIGHT CH

PEAK VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	35.66	31.92	8.74	31.95	44.37	74.00	-29.63	Vertical
7425.00	30.74	36.58	11.80	31.67	47.45	74.00	-26.55	Vertical
9900.00	30.50	38.80	14.39	31.43	52.26	74.00	-21.74	Vertical
12375.00	*					74.00		Vertical
14850.00	*					74.00		Vertical
4950.00	39.61	31.92	8.74	31.95	48.32	74.00	-25.68	Horizontal
7425.00	32.35	36.58	11.80	31.67	49.06	74.00	-24.94	Horizontal
9900.00	29.77	38.80	14.39	31.43	51.53	74.00	-22.47	Horizontal
12375.00	*					74.00		Horizontal
14850.00	*					74.00		Horizontal

AV VALUE

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	24.82	31.92	8.74	31.95	33.53	54.00	-20.47	Vertical
7425.00	19.64	36.58	11.80	31.67	36.35	54.00	-17.65	Vertical
9900.00	18.81	38.80	14.39	31.43	40.57	54.00	-13.43	Vertical
12375.00	*					54.00		Vertical
14850.00	*					54.00		Vertical
4950.00	28.87	31.92	8.74	31.95	37.58	54.00	-16.42	Horizontal
7425.00	21.70	36.58	11.80	31.67	38.41	54.00	-15.59	Horizontal
9900.00	18.41	38.80	14.39	31.43	40.17	54.00	-13.83	Horizontal
12375.00	*					54.00		Horizontal
14850.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. ***, means this data is the too weak instrument of signal is unable to test.

4. BAND EDGE TEST

4.1 LIMIT


According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

4.2 TEST PROCEDURE

- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
Use the following spectrum analyzer settings:
c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
Submit this data.

4.3 TEST SETUP


Radiated Emission Test-Up Frequency Above 1GHz

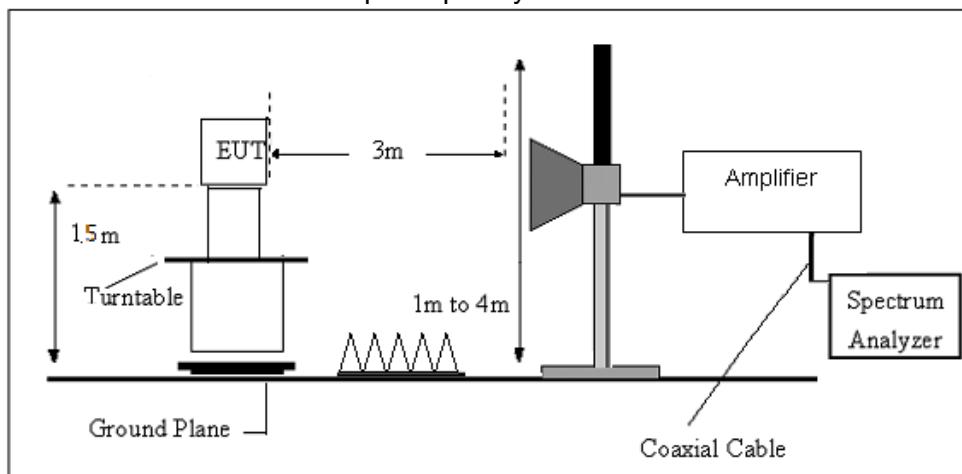

4.4 TEST RESULTS

Low CH (GFSK)


Polarization: Horizontal

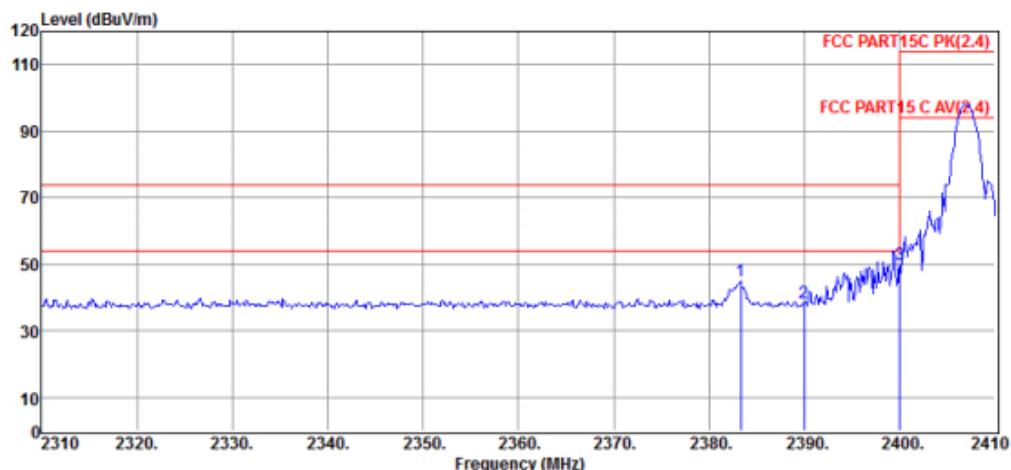

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2383.30	56.71	27.47	43.20	4.03	45.01	74.00	-28.99	Peak	HORIZONTAL
2	2390.00	50.24	27.48	43.21	4.03	38.54	74.00	-35.46	Peak	HORIZONTAL
3	2400.00	61.58	27.50	43.21	4.04	49.91	74.00	-24.09	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Polarization: Vertical

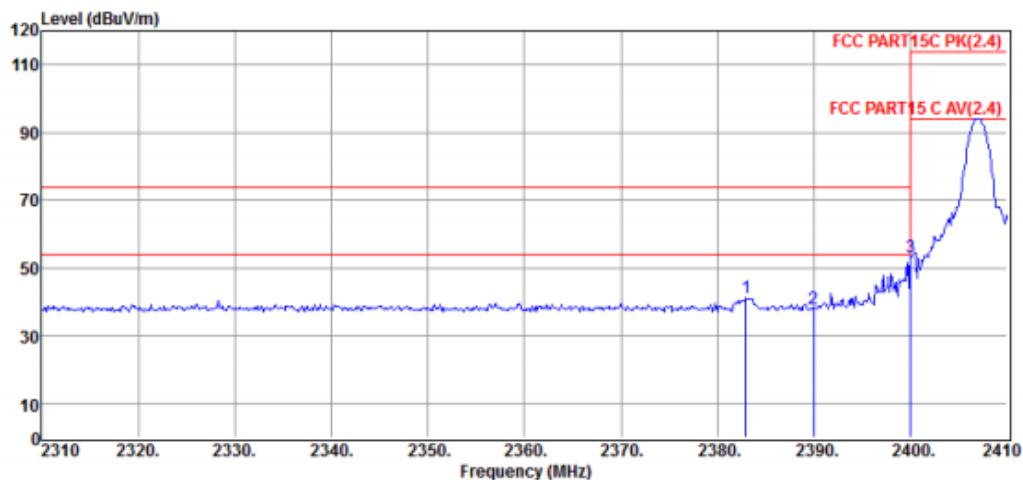

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2383.00	52.99	27.47	43.20	4.03	41.29	74.00	-32.71	Peak	VERTICAL
2	2390.00	49.77	27.48	43.21	4.03	38.07	74.00	-35.93	Peak	VERTICAL
3	2400.00	65.05	27.50	43.21	4.04	53.38	74.00	-20.62	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

High CH(GFSK)


Polarization: Vertical

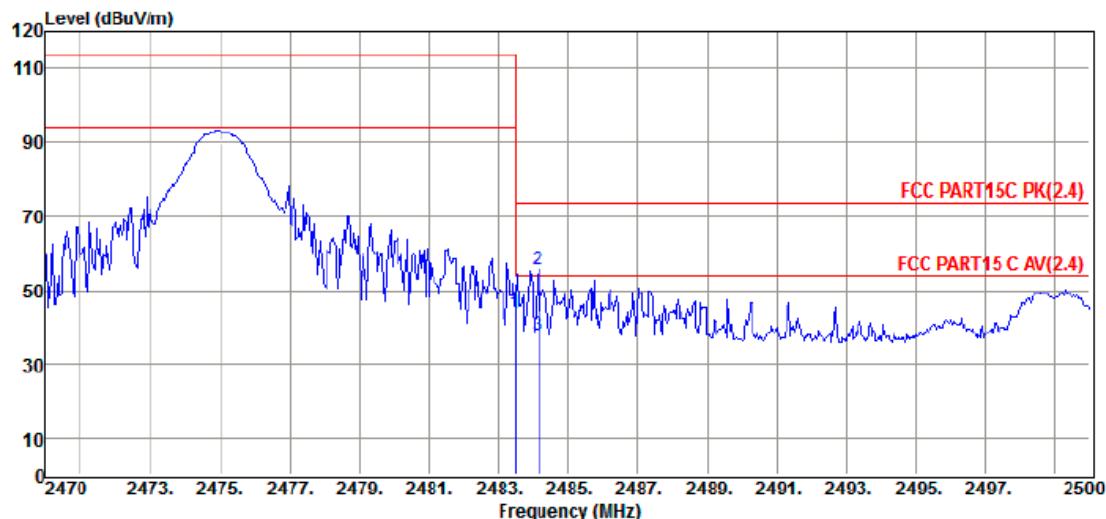

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	55.04	27.67	4.12	43.58	74.00	-30.42	Peak	VERTICAL
2	2484.16	67.15	27.67	4.12	55.69	74.00	-18.31	Peak	VERTICAL
3	2484.16	49.60	27.67	4.12	38.14	54.00	-15.86	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Polarization: Horizontal

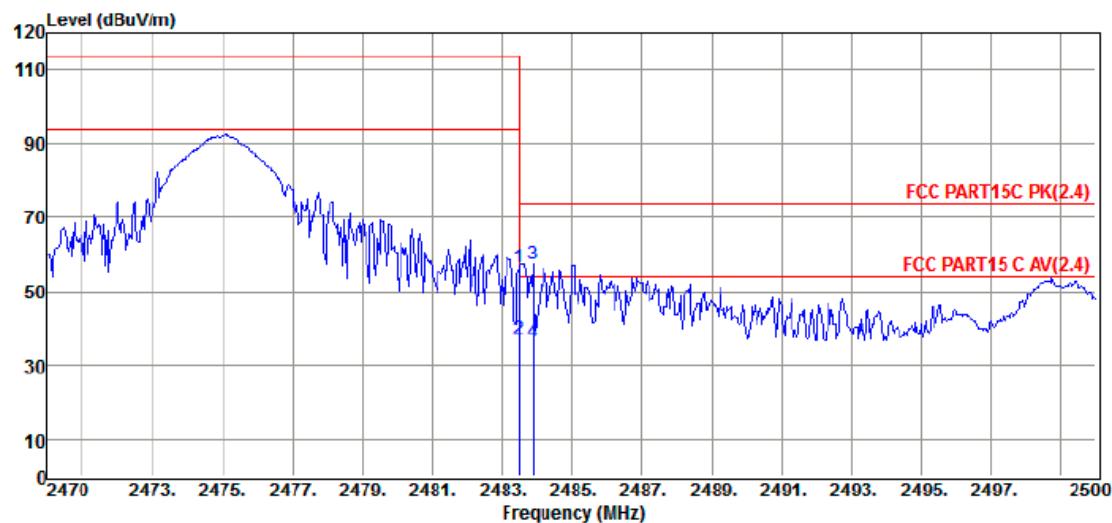

Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	67.79	27.67	4.12	56.33	74.00	-17.67	Peak	HORIZONTAL
2	2483.50	48.60	27.67	4.12	37.14	54.00	-16.86	Average	HORIZONTAL
3	2483.89	68.71	27.67	4.12	57.25	74.00	-16.75	Peak	HORIZONTAL
4	2483.89	47.86	27.67	4.12	36.40	54.00	-17.60	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

5. 20 DB BANDWIDTH TEST

5.1 LIMIT


According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

5.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a

- a. known signal from an external generator
- b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


5.3 TEST SETUP


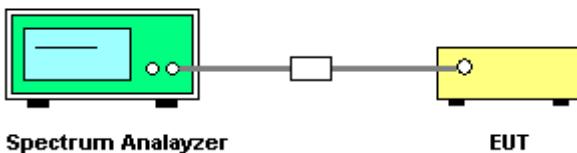


5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 4.5V

Frequency	20dB Bandwidth (MHz)	Result
2407 MHz	1.224	PASS
2445 MHz	1.252	PASS
2475 MHz	1.184	PASS

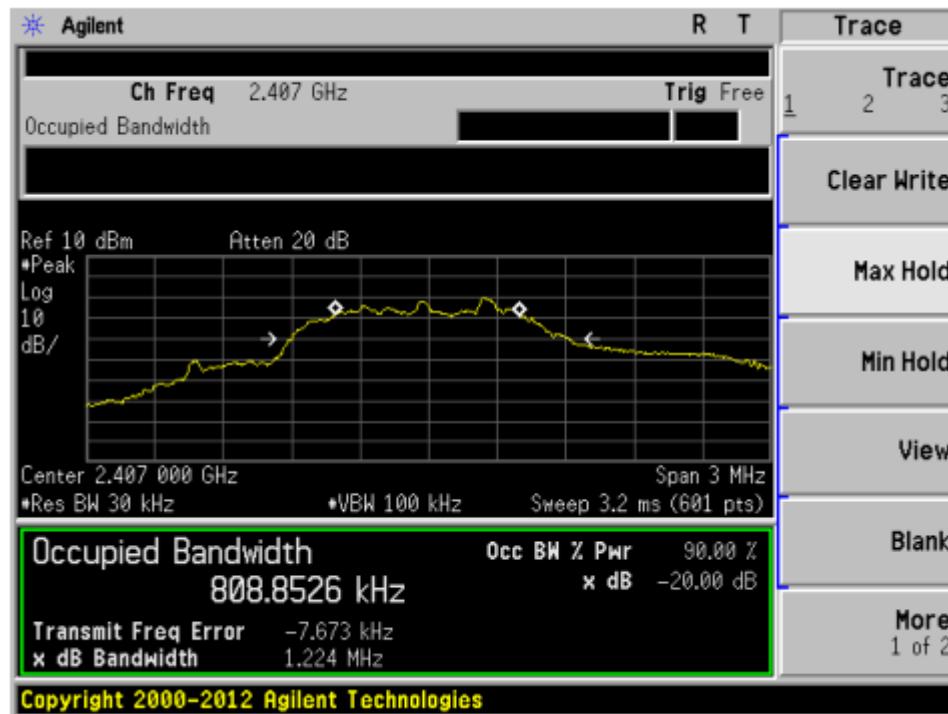

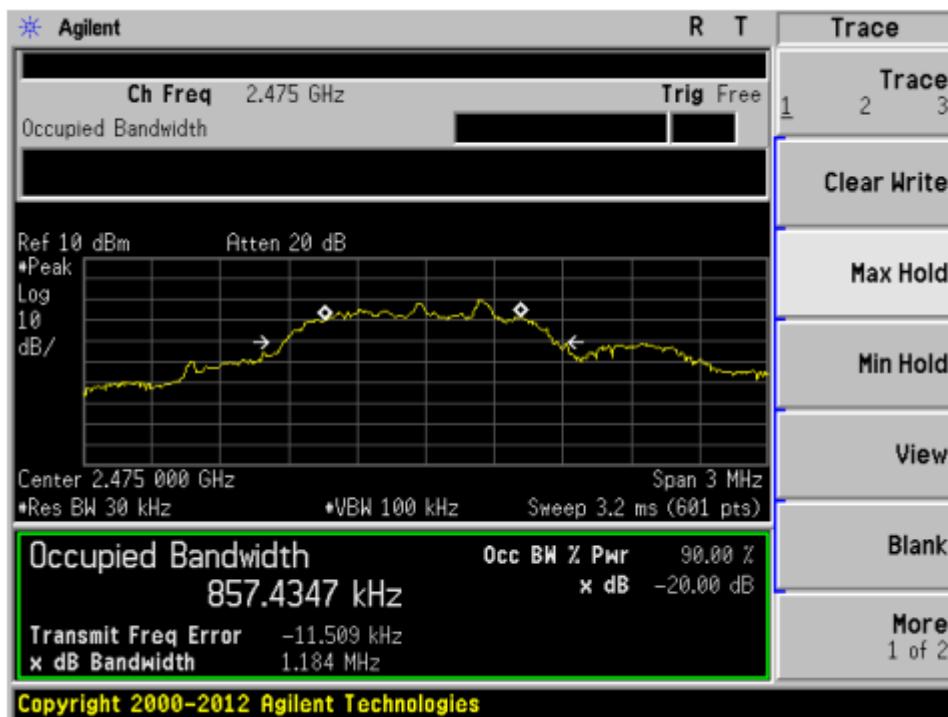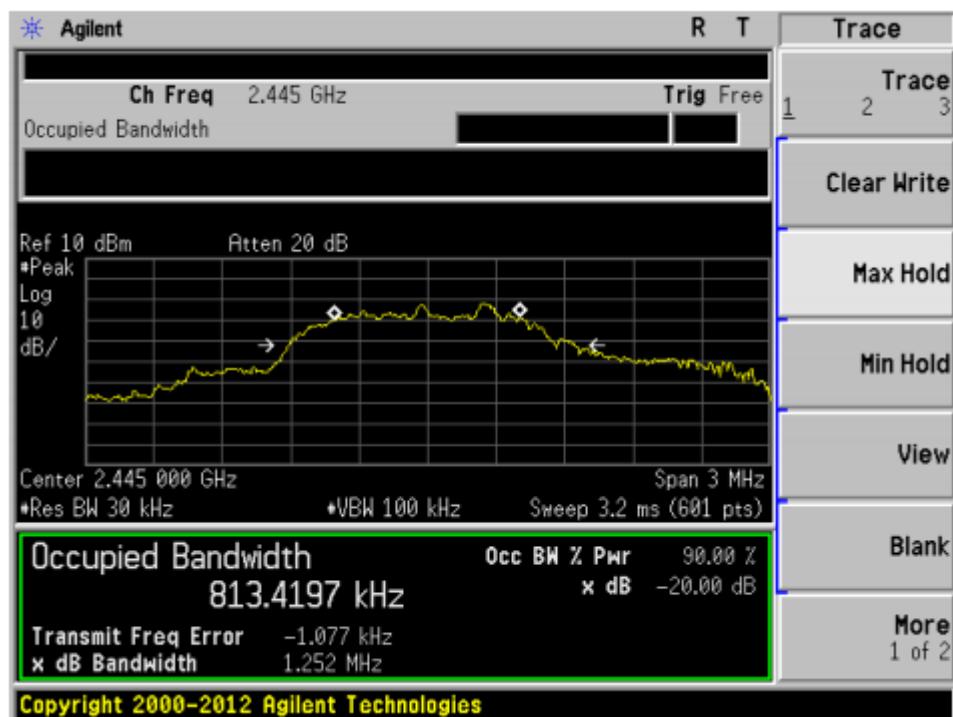

6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The antennas used for this product are 2.4g copper antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.0dBi.

*****END OF THE REPORT*****