



# FCC TEST REPORT

**Test report  
On Behalf of  
Brodit AB**

**For  
Qi Wireless Charging Holder**

**Model No.: Qi-15-2.1-IP1200**

**FCC ID: 2AXQH-QI-15**

**Prepared for : Brodit AB  
Gesallvagen 8, 546 34 Karlsborg, Sweden**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China**

**Date of Test: Aug. 12, 2020 ~ Aug. 26, 2020  
Date of Report: Aug. 26, 2020  
Report Number: HK2008172225-1E**



## TEST RESULT CERTIFICATION

**Applicant's name** .....: Brodit AB

Address .....: Gesallvagen 8, 546 34 Karlsborg, Sweden

**Manufacture's Name** .....: Lyte Ltd

Address .....: 1st Floor, White Collar Factory, 1 Old Street Yard, London, EC1Y 8AF

### Product description

Trade Mark .....: Brodit

Product name .....: Qi Wireless Charging Holder

Model and/or type reference ..: Qi-15-2.1-IP1200

**Standards** .....: FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:

Date (s) of performance of tests .....: Aug. 12, 2020 ~ Aug. 26, 2020

Date of Issue .....: Aug. 26, 2020

Test Result .....: **Pass**


Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory :



(Jason Zhou)



## Table of Contents

<b>1. TEST SUMMARY .....</b>	<b>4</b>
1.1 TEST PROCEDURES AND RESULTS .....	4
1.2 TEST FACILITY .....	4
1.3 MEASUREMENT UNCERTAINTY .....	4
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1 General Description of EUT .....	5
2.2. Carrier Frequency of Channels.....	6
2.3 Operation of EUT during testing .....	6
2.4 Description of Test Setup .....	6
2.5 Measurement Instruments List.....	7
<b>3. CONDUCTED EMISSION TEST.....</b>	<b>8</b>
3.1 Test Specification .....	8
3.2 Test data .....	9
<b>4. Radiated Spurious Emission Measurement.....</b>	<b>10</b>
4.1 Block Diagram of Test Setup .....	10
4.2 Test Result.....	11
<b>5. PHOTOGRAPH OF TEST.....</b>	<b>12</b>
<b>6. PHOTOGRAPH OF TEST.....</b>	<b>13</b>



## 1. TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	Section number	RESULT
CONDUCTED EMISSIONS TEST	§18.307	N/A
RADIATED EMISSION TEST	§18.305	COMPLIANT

NOTE: N/A means not applicable in this report.

### 1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

### 1.3 MEASUREMENT UNCERTAINTY

#### Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1 General Description of EUT

Equipment	Qi Wireless Charging Holder
Model Name	Qi-15-2.1-IP1200
Serial No.	N/A
Trade Mark	Brodit
FCC ID	2AXQH-QI-15
Antenna Type	Coil Antenna
Operation frequency	135.6 KHz
Number of Channels	1
Modulation Type	ASK
Power Source	Input: DC 10V-30V Wireless Output: 5V---2A

Note: When testing , we used DC 12.0V battery

## 2.2. Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
1	135.6KHz


## 2.3 Operation of EUT during testing

### Operating Mode

The mode is used: Transmitting mode

## 2.4 Description of Test Setup

### Operation of EUT during testing

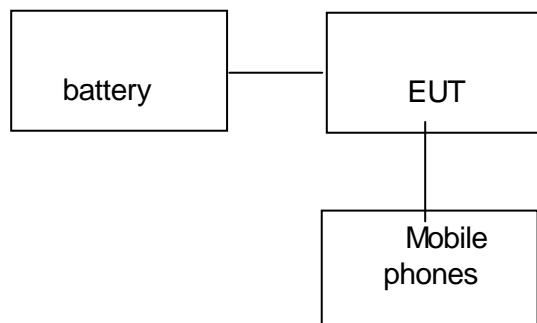

- Mobile phones information

Model: S6

Input: 5VDC

The sample was placed 0.8m height above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



## 2.5 Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 26, 2019	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 26, 2019	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 26, 2019	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 26, 2019	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 26, 2019	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 26, 2019	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 26, 2019	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 26, 2019	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 26, 2019	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 26, 2019	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 26, 2019	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 26, 2019	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 26, 2019	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 26, 2019	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 26, 2019	1 Year

### 3. CONDUCTED EMISSION TEST

#### 3.1 Test Specification

<b>Test Requirement:</b>	FCC Part18 Section 18.307		
<b>Test Method:</b>	FCC MP-5		
<b>Frequency Range:</b>	150 kHz to 30 MHz		
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
<b>Limits:</b>	Frequency range (MHz)		Limit (dBuV)
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
<b>Test Setup:</b>	5-30	60	50
	<p><i>Remark</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>		
	<b>Test Mode:</b> Charging		
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference.</li> </ol>		
<b>Test Result:</b>	N/A		



### 3.2 Test data

N/A

NOTE: This test N/A since EUT is just powered by DC power.

## 4. Radiated Spurious Emission Measurement

### 4.1 Block Diagram of Test Setup

<b>Test Requirement:</b>	FCC Part18 Section 18.305																			
<b>Test Method:</b>	FCC MP-5																			
<b>Frequency Range:</b>	9 kHz to 30MHz																			
<b>Measurement Distance:</b>	3 m																			
<b>Antenna Polarization:</b>	Horizontal & Vertical																			
<b>Operation mode:</b>	Refer to item 4.1																			
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
Frequency	Detector	RBW	VBW	Remark																
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																
<b>Limit:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th rowspan="2">Distance (Meters)</th> <th colspan="2">Field strength Limit</th> <th rowspan="2">Remark</th> </tr> <tr> <th>(dBuV/m)</th> <th></th> </tr> </thead> <tbody> <tr> <td>0.009 -30</td> <td>3</td> <td>103.5</td> <td></td> <td>Quasi-Peak</td> </tr> </tbody> </table> <p>Remark:  (1) Emission level dBuV/m for 0.009~30MHz = <math>20\log(15) + 40\log(300/3)</math> dBuV/m;  (2) Calculated according FCC 18.305.  (3) The smaller limit shall apply at the cross point between two frequency bands.  (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.</p>					Frequency (MHz)	Distance (Meters)	Field strength Limit		Remark	(dBuV/m)		0.009 -30	3	103.5		Quasi-Peak			
Frequency (MHz)	Distance (Meters)	Field strength Limit		Remark																
		(dBuV/m)																		
0.009 -30	3	103.5		Quasi-Peak																
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p>																			
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (2 m, refer mp5-2.2.5) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.</li> <li>Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preampl Factor = Level</li> <li>For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported.</li> </ol>																			



	Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=200Hz for 9K< f <150 KHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 9 KHz, VBW= 30KHz for 150KHz < f < 30 MHz for peak measurement.
<b>Test mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS

## 4.2 Test Result


### For 9KHz - 30MHz Test Results:

Freq. (MHz)	Detector Mode (PK/QP/AV)	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
0.108	AV	PK	22.33	24.8	47.13	103.5	56.37
0.136	AV	PK	44.61	24.8	69.41	103.5	34.09
0.484	AV	PK	27.52	25.03	52.55	103.5	50.95
0.5	PK	PK	23.51	25.03	48.54	103.5	54.96

#### NOTE:

1. Level=Reading+Factor; Margin=Limits-Level;
2. All other emissions are attenuated 20dB below the limit.

## 5. PHOTOGRAPH OF TEST

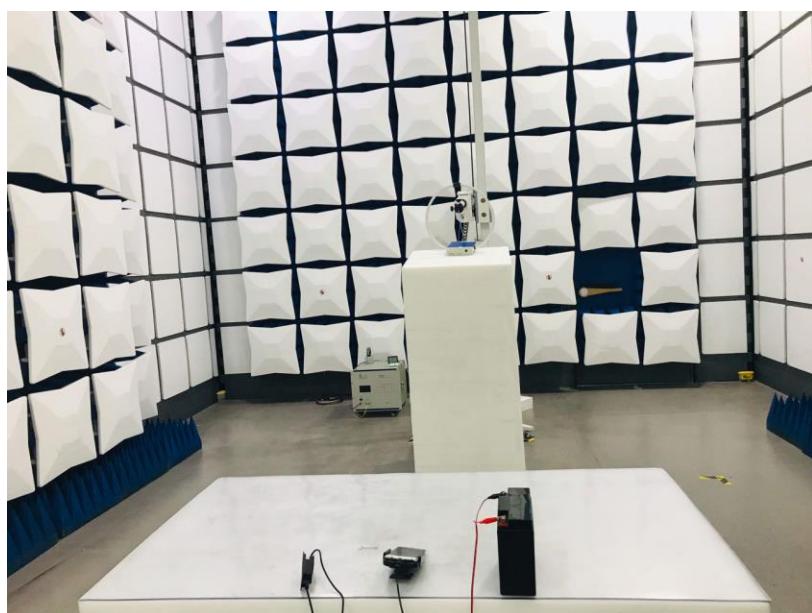




## 6. PHOTOGRAPH OF TEST



### External photos



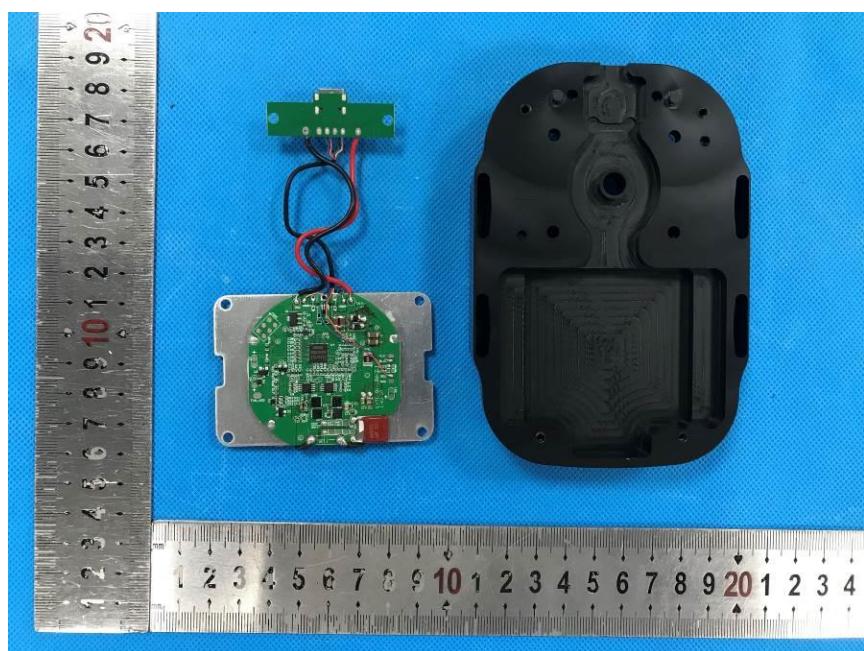

Internal photos

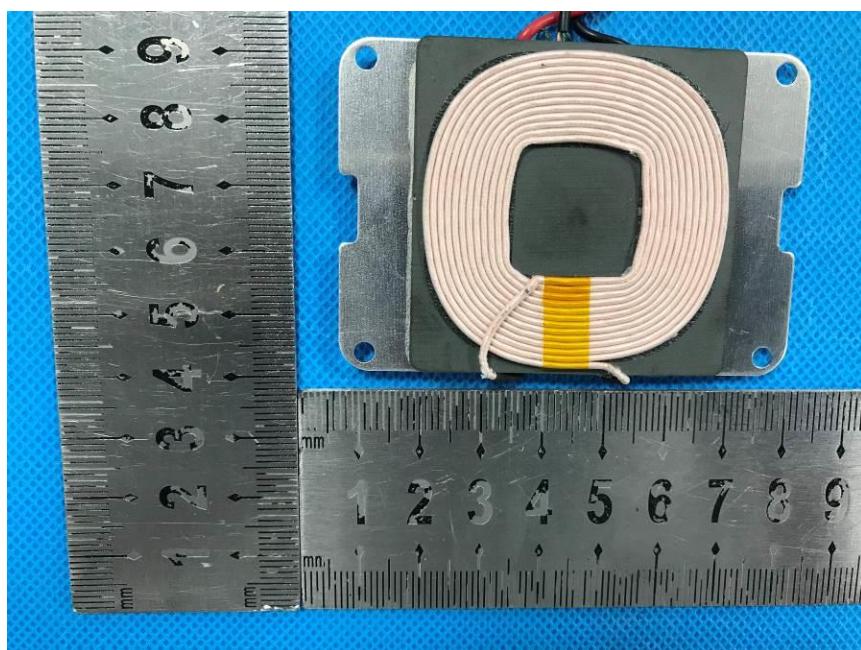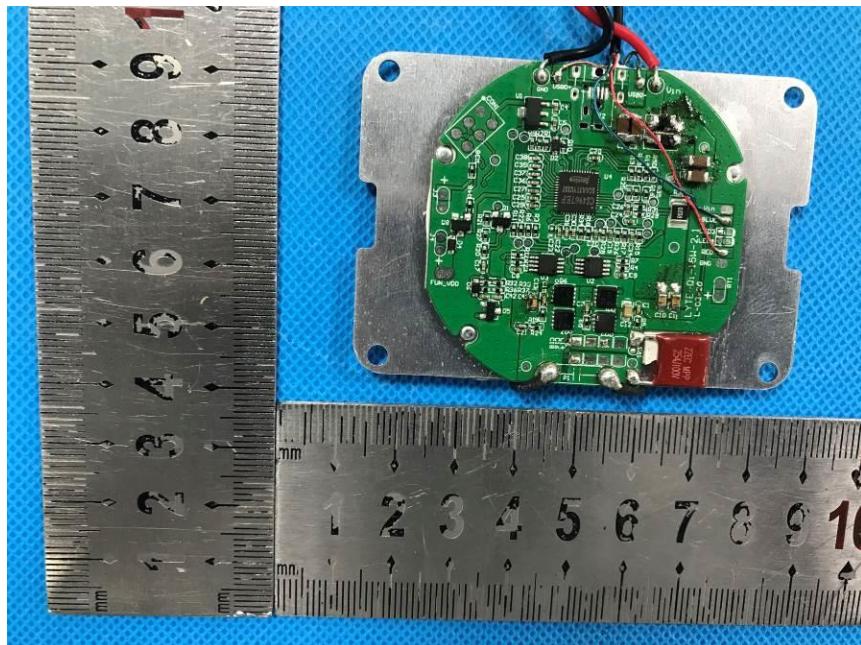

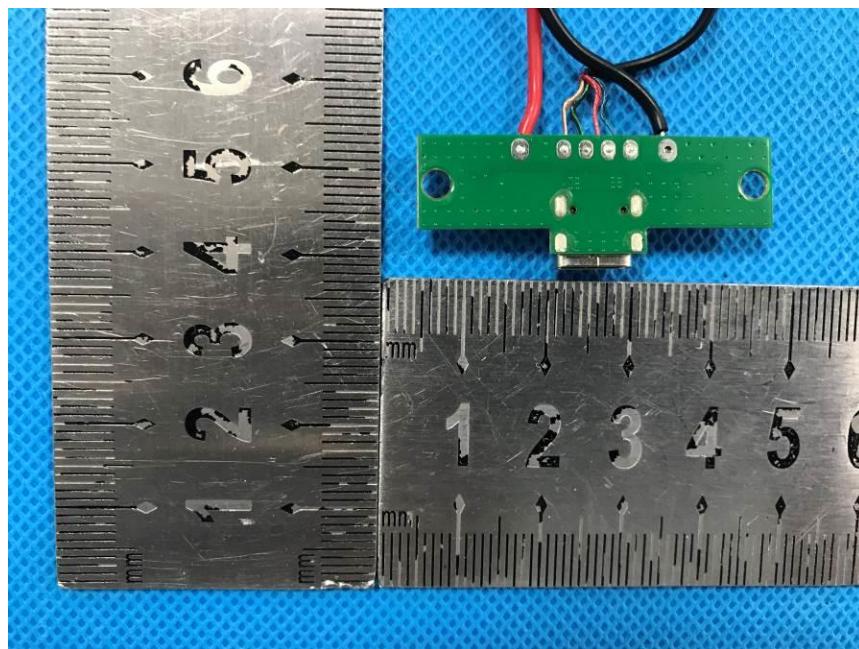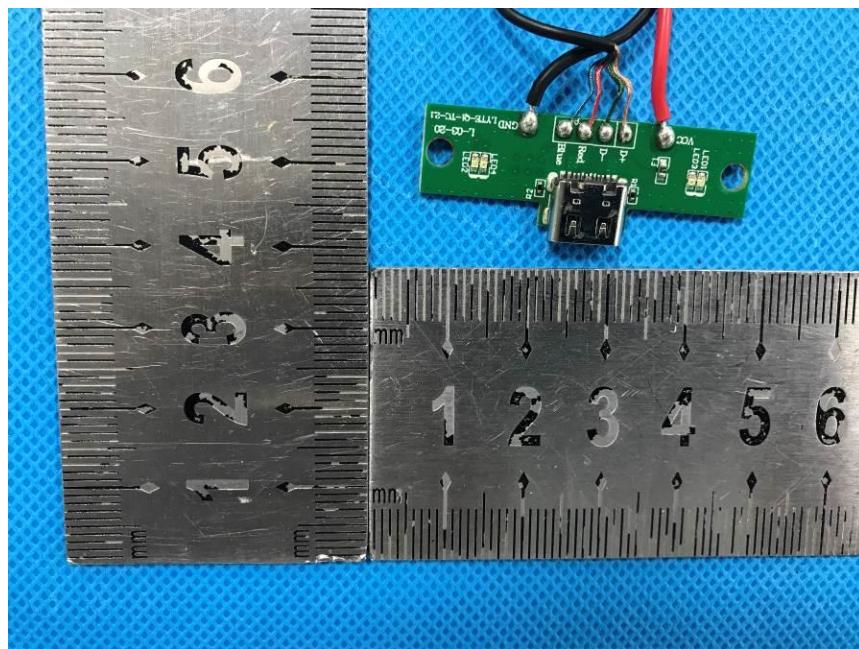

\*\*\*\*\*END\*\*\*\*\*